

3686

ORIG

4-879

BOOK "G" BOOK 3686

FIELD NOTES

OF THE SURVEY OF THE

WEST BOUNDARY

and

SUBDIVISION LINES

of

TOWNSHIP 36 NORTH, RANGE 11 WEST

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

William E. Hiester, U.S. Transitman

and

Charles E. Hunter, U.S. Transitman

~~In the capacity of U.S. Surveyor General~~ under Special Instructions dated April 23, 1923, issued by the United States Surveyor General to govern surveys included in Group No. 122, Arizona, which were approved by the Commissioner of the General Land Office, May 17, 1923, and Assignment Instructions dated Nov. 15, 1923.

Survey commenced March 13, 1924.

Survey completed March 26, 1924.

3686

3686


14

WEST 40' 10"

Book "G"

BOOK 3686

INDEX DIAGRAM.

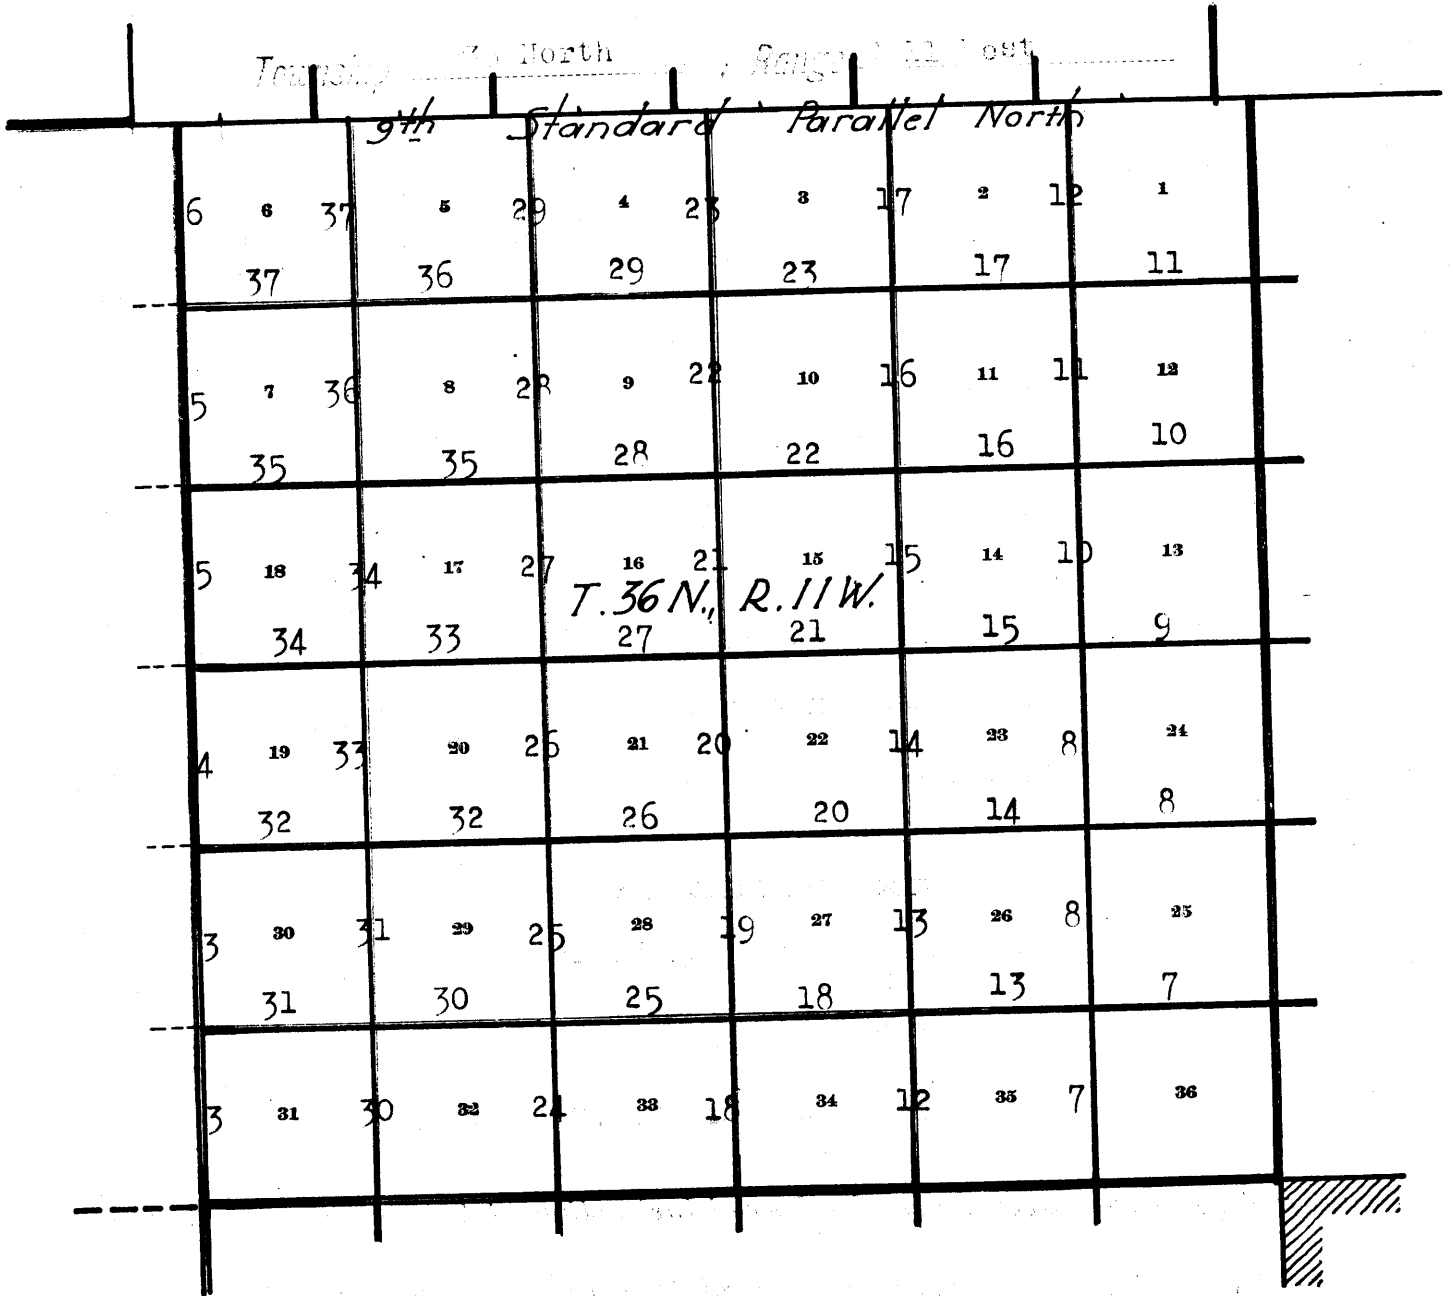

———— Lines surveyed under this group.

———— Accepted surveys.

- - - - - Unsurveyed.

//// Areas surveyed as per accepted plats on file.

DATE 4-679 b BOOK 3686

~~INDEX~~ DIAGRAM.

Township 36 North, Range 11 West
9th Std. Par. N. surveyed in 1915

3-20-24	6 3-20-24	5 3-20-24	4 3-20-24	3 3-17-24	2 3-25-24	1 3-25-24
3-19-24	7 3-22-24	8 3-22-24	9 3-24-24	10 3-25-24	11 3-25-24	12 3-25-24
3-19-24	15 3-20-24	17 3-20-24	16 3-14-24	15 3-14-24	14 3-14-24	13 3-22-24
3-19-24	19 3-20-24	20 3-17-24	21 3-17-24	22 3-22-24	23 3-22-24	24 3-14-24
3-19-24	26 3-19-24	29 3-19-24	28 3-19-24	27 3-24-24	26 3-24-24	25 3-14-24
3-19-24	31 3-17-24	32 3-14-24	33 3-13-24	34 3-24-24	35 3-14-24	36 3-14-24

For dates of survey of this line see Book "F"

For dates of survey of this line see Book "F"

Lines in red surveyed by William E. Hiester, U.S. Surveyor.
Lines in green surveyed by Charles E. Hunter, U.S. Transitman.

BOOK 3686

Survey commenced March 13, 1924, and executed by William E. Hiester, U.S. Surveyor and Charles E. Hunter, U.S. Transitman, on dates shown on diagram on page 1 hereof, using Buff transit No. 9977 and Young and Sons transit No. 8535 respectively. Both instruments are equipped with full vertical circles and Smith solar attachments, and were approved by the Assistant Supervisor of Surveys conditional upon satisfactory field tests. Unless otherwise specified all azimuth determinations are accomplished with the solar attachments.

We examine the adjustments of the instruments and correct all errors, then to test the solar apparatus by comparing their indications resulting from solar observations made during a.m. and p.m. hours with a meridian determined from observation on Polaris proceed as follows:

March 13, 1924: at the cor. of secs. 15, 16, 21 and 22, T. 36 N., R. 11 W., Gila and Salt River Base and Meridian, Arizona, in latitude $36^{\circ}30\frac{1}{2}'$ N., longitude $113^{\circ}28\frac{1}{2}'$ W., of Greenwich, at 8h 4m p.m., l.m.t., we observe Polaris at western elongation, making four observations, two each with telescope in direct and reversed positions, and mark the mean point in the line thus determined, on a peg driven firmly in the ground 8 chs. N.

Azimuth of Polaris at western elongation = $1^{\circ}22'7''$.

March 14: we lay off the azimuth of Polaris $1^{\circ}22'$ to the east and mark the meridian thus determined by a tack in a stake driven firmly in the ground 8 chs. N.

At 7h 0m a.m., app.t., we set off $36^{\circ}30\frac{1}{2}'$ N., on the latitude arcs, $2^{\circ}26'S.$, on the declination arcs, and determine meridians with the solars which agree with the true meridian.

At 5h 0m p.m., app.t., with the latitude arcs unchanged we set off $2^{\circ}16'S.$, on the declination arcs and determine meridians with the solars which agree with the true meridian.

As all of the solar observations during the usual hours of solar work come within $1'30''$ of the true meridian, we conclude that the adjustments of the instruments are satisfactory.

Unless otherwise specified all measurements are made with Lufkin steel tapes 5 chs. in length compared with a Lufkin standard steel tape and found correct. The measurements are made on the slope, the vertical angle determined, and the slope measurement properly reduced to true horizontal distances.

West Boundary of T.36 N., R.11 W.

Chains From the cor. of Ts. 35 and 36 N., Rs. 11 and 12 W., described in Book "F",

North, bet. secs. 31 and 36.
Over rolling land, through scattering timber and undergrowth.

Desc. 115 ft. over N. slope.

17.05 Wash, 8 lks. wide, course SE.


17.81 Road, bears SE. and NW.

Asc. 85 ft. over Sw. slope.

37.50 Point of spur, slopes NE.

Desc. 18 ft. to

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



From which,

A cedar, 16 ins. diam., bears N. $3\frac{1}{4}^{\circ}$ E., 157 lks. dist., marked $\frac{1}{4}$ S 31 B T

A cedar, 10 ins. diam., bears N. $10\frac{3}{4}^{\circ}$ W., 233 lks. dist., marked $\frac{1}{4}$ S 36 B T

Desc. 50 ft. over NW. slope.


49.30 Draw, course NE.

49.50 Road, bears NE. and SW.

Asc. 100 ft. over SE. slope.

72.70 Spur, slopes NE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to bed rock, with marked cross (+) stone alongside, in a mound of stone, for cor. of secs. 25, 30, 31 and 36, marked on brass cap



From which,

A cedar, 6 ins. diam., bears S. $1\frac{1}{4}^{\circ}$ E., 224 lks. dist. marked T 36 N R 11 W S 31 B T


A cedar, 7 ins. diam., bears S. 25° W., 138 lks. dist. marked T 36 N R 12 W S 36 B T

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

North, bet. secs. 25 and 30.
Over rolling land, through scattering timber and undergrowth.

15.80 Road, bears SE. and NW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



Dig pits 18 x 18 x 12 ins. one each on line N. and S. of cor. 3 ft. dist.

44.00 Spur, slopes NE.

Chains

53.43

Desc. 70 ft. over NW. slope.
Wash, 10 lks. wide, course NE.
Asc. 150 ft. over SE. slope.

54.40

Road, bears NE. and SW.

69.50

Spur, slopes NE.

80.00

Desc. 40 ft.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground for cor. of secs. 19, 24, 25 and 30, marked on brass cap

T36N	
R12W	R11W
S. 24	S. 19
S. 25	S. 30
1924	

From which,

- A cedar, 8 ins. diam., bears N.1 3/4°E., 97 lks. dist. marked T 36 N R 11 W S 19 B T
- A cedar, 18 ins. diam., bears S.19 1/2°E., 25 lks. dist. marked T 36 N R 11 W S 30 B T
- A cedar, 18 ins. diam., bears S.51°W., 64 lks. dist. marked T 36 N R 12 W S 25 B T
- A cedar, 18 ins. diam., bears N.17°W., 66 lks. dist. marked T 36 N R 12 W S 24 B T

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

North, bet. secs. 19 and 24.

Over rolling land, through scattering timber and undergrowth.

5.00

Draw, course NE.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for 1/4 sec. cor. marked on brass cap

1/4	
S. 24	S. 19
1924	

From which,

- A cedar, 18 ins. diam., bears N.40 1/4°E., 137 lks. dist. marked 1/4 S 19 B T
- A cedar, 10 ins. diam., bears N.37 1/4°W., 63 lks. dist. marked 1/4 S 24 B T

54.00

Wash, course E.

80.00

Asc. 100 ft. to

Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bed rock, with marked cross (+) stone alongside, supported in a mound of stone, for cor. of secs. 13, 18, 19 and 24, marked on brass cap

T36N	
R12W	R11W
S. 13	S. 18
S. 24	S. 19
1924	

From which,


- A cedar, 10 ins. diam., bears N.60°E., 317 lks. dist. marked T 36 N R 11 W S 18 B T
- A cedar, 9 ins. diam., bears S.21°W., 274 lks. dist. marked T 36 N R 12 W S 24 B T
- A cedar, 10 ins. diam., bears N.64 1/2°W., 136 lks. dist. marked T 36 N R 12 W S 13 B T

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar. Undergrowth; sagebrush.

West Boundary of T.36 N., R.11 W.

Chains
7.70
17.70
25.90
40.00


North, bet. secs. 13 and 18.
Over rolling land, through scattering timber and undergrowth.
Desc. 57 ft. to
Draw, course NE. Road, bears NE. and SW.
Asc. 57 ft. over SE. slope.
Top of ascent.
Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap



From which,
A cedar, 16 ins. diam., bears N.64°E., 76 lks. dist. marked $\frac{1}{4}$ S 18 B T
A cedar, 10 ins. diam., bears N.67°W., 100 lks. dist. marked $\frac{1}{4}$ S 13 B T

50.00
63.50
74.00
80.00

Desc. 46 ft. to
Draw, course NE. Asc. gentle SE. slope.
Desc. gentle N. slope.
Draw, course NE. Asc. 45 ft. to
Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in the ground to bed rock, supported in a mound of stone, for cor. of secs. 7, 12, 13 and 18, marked on brass cap




From which,
A cedar, 5 ins. diam., bears N.22 $\frac{1}{2}$ °E., 32 lks. dist. marked B T
A cedar, 4 ins. diam., bears S.26 $\frac{3}{4}$ °E., 59 lks. dist., marked B T
A cedar, 8 ins. diam., bears S.25 $\frac{1}{2}$ °W., 138 lks. dist., marked T 36 N R 12 W S 13 B T
A cedar, 4 ins. diam., bears N.44 $\frac{1}{4}$ °W., 63 lks. dist. marked B T

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

40.00

North, bet. secs. 7 and 12.
Over rolling land, through scattering timber and undergrowth.
Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap



From which,
A cedar, 12 ins. diam., bears S.59 $\frac{1}{2}$ °W., 85 lks. dist. marked $\frac{1}{4}$ S 12 B T
A cedar, 12 ins. diam., bears S.80°W., 84 lks. dist. marked $\frac{1}{4}$ S 12 B T
No bearing tree available in sec. 7.

64.00
80.00

Draw, course NE.
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in

West Boundary of T.36 N., R.11 W.

Chains

the ground for cor. of secs. 1, 6, 7, and 12 marked on brass cap

T36N	
R12W	R11W
S 1	S 6
S 12	S 7
1924	

Raise a mound of stone, 4½ ft. base, 4 ft. high W. of cor.

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

North, bet. secs. 1 and 6.
Over rolling land, through scattering timber and undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for ¼ sec. cor. marked on brass cap

¼	
S 1	S 6
1924	

From which,
A cedar, 4 ins. diam., bears N.3½°E., 119 lks.
dist., marked ¼ S 6 B T
A cedar, 4 ins. diam., bears N.66°W., 177 lks.
dist., marked ¼ S 1 B T

84.02 Intersect the 9th. Standard Parallel North, 22.52 chs. S.89°49'E., of the S.C. of Ts. 37 N., Rs. 11 and 12 W. which is an iron post, 3 ins. diam., 12 ins. above ground, firmly set, properly marked, and witnessed by a mound of stone, N. of cor.

At point of intersection, set an iron post, 3 ft. long, 3 ins. diam., 16 ins. in the ground to bed rock, in a mound of stone, for closing cor. of Ts. 36 N., Rs. 11 and 12 W., marked on brass cap

T37N R11W	
S31	
S 1	S 6
R12W	R11W
T36N	
C C	
1924	


Raise a mound of stone, 3 ft. base, 2 ft. high S. of cor.

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

Subdivision of T.36 N., R.11 W.

Chains From the cor. of secs. 1, 2, 35 and 36 on S. bdy. of Tp., described in Book "F", N.0°1'W., bet. secs. 35 and 36. Over rolling land, through scattering timber and undergrowth.


40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, supported in a mound of stone, for 1/4 sec. cor. marked on brass cap



From which,
A cedar, 6 ins. diam., bears S.40 1/4°E., 368 lks. dist. marked 1/4 S36 B T
A cedar, 10 ins. diam., bears N.36°W., 370 lks. dist. marked 1/4 S35 B T

70.90 Wash, 15 lks. wide, course N.75°E. Asc. gentle S. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to bed rock, supported in a mound of stone, for cor. of secs. 25, 26, 35 and 36, marked on brass cap




Raise a mound of stone, 2 ft. base, 1 1/2 ft. high N. of cor.

Land; rolling.
Soil; rocky, 3rd. and 4th. rates.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

40.00 N.89°57'E., on a random line bet. secs. 25 and 36. Set temp. 1/4 sec. cor.
79.92 Fall 12 lks. S. of the cor. of secs. 25, 30, 31 and 36 on E. bdy. of Tp., described in Book "E".

Thence S.89°52'W., on a true line bet. secs. 25 and 36. Over rolling land, through scattering timber and undergrowth.

25.52 Road, bears N. and S.
25.72 Wire fence, bears N. and S.
35.00 House, bears N. 7 chs.
37.22 Road, bears N. and S.
39.96 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for 1/4 sec. cor. marked on brass cap



Raise a mound of stone, 3 ft. base, 2 1/2 ft. high N. of cor.

44.46 Wash, course NE.
55.95 Wire fence, bears N. and S.
79.92 The cor. of secs. 25, 26, 35 and 36.


Land; rolling. Soil; clay, 3rd. rate.
Timber; cedar.
Undergrowth; sagebrush.

Chains

N.0°1'W., bet. secs. 25 and 26.
Over rolling land, through scattering undergrowth.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. marked on brass cap



Dig pits 18 x 18 x 12 ins. one each on line N. and S. of cor. 3 ft. dist.

55.30


Road, bears SE. and NW.

70.00

Small wash, course NE.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground for cor. of secs. 23, 24, 25 and 26, marked on brass cap



Dig pits 18 x 18 x 12 ins. one in each sec. NE., SE., SW. and NW. of cor. 3 ft. dist.

Land; rolling.
Soil; clay, 3rd. rate.
Timber; none.
Undergrowth; sagebrush.

40.00

N.89°52'E., on a random line bet. secs. 24 and 25.
Set temp. $\frac{1}{4}$ sec. cor.

79.88

Fall 5 lks. S. of the cor. of secs. 19, 24, 25 and 30 on E. bdy. of Tp., described in Book "B".


Thence
S.89°50'W., on a true line bet. secs. 24 and 25.
Over rolling land, through scattering undergrowth.

11.58

Wash, 10 lks. wide, course NE.

39.94

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



From which,
A cedar, 14 ins. diam., bears N.72°W., 453 lks. dist., marked $\frac{1}{4}$ S 24 B T
Deposit a stone marked cross (+) at base of post.

46.58

Draw, course SE.

79.88

The cor. of secs. 23, 24, 25 and 26.

Land; rolling.
Soil; clay and gravel, 3rd. rate.
Timber; none.
Undergrowth; sagebrush.

N.0°1'W., bet. secs. 23 and 24.
Over rolling land, through scattering undergrowth.

7.70

Wash, 6 lks. wide, course SE.

25.00

Asc. gentle S. slope.

40.00

Top of ascent.

Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bed rock, supported in a mound of stone

Subdivision of T.36 N., R.11 W.

Chains

with marked cross (+) alongside base of post, for $\frac{1}{4}$ sec, cor. marked on brass cap

$$\begin{array}{c} \frac{1}{4} \\ S\ 23 \quad | \quad S\ 24 \\ 1924 \end{array}$$
73.00
80.00

Enter scattering timber, bears E. and W.
Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground to bed rock, supported in a mound of stone, for cor. of secs. 13, 14, 23 and 24, marked on brass cap

$$\begin{array}{c} T36N\ R11W \\ S\ 14\ | \ S\ 13 \\ S\ 23\ | \ S\ 24 \\ 1924 \end{array}$$

From which,

- A cedar, 8 ins. diam., bears N.16°E., 78 lks. dist. marked T 36 N R 11 W S 13 B T
- A cedar, 14 ins. diam., bears S.25 $\frac{1}{2}$ °E., 142 lks. dist., marked T 36 N R 11 W S 24 B T
- A cedar, 5 ins. diam., bears S.25 $\frac{1}{2}$ °W., 125 lks. dist. marked B T
- A cedar, 4 ins. diam., bears N.41°W., 23 lks. dist. marked B T

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

40.00
79.82

N.89°50'E., on a random line bet. secs. 13 and 24.
Set temp. $\frac{1}{4}$ sec. cor.
Intersect the cor. of secs. 13, 18, 19 and 24 on E. bdy. of Tp., described in Book "A".

Thence
S.89°50'W., on a true line bet. secs. 13 and 24.
Over rolling land, through scattering undergrowth.

21.40
39.91

Asc. SE. slope.
Draw, course SE.
Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap

$$\begin{array}{c} S\ 13 \\ \frac{1}{4} S\ 24 \\ 1924 \end{array}$$

Raise a mound of stone, 4 $\frac{1}{2}$ ft. base, 3 ft. high N. of cor.


40.80
47.90
63.00
79.82

Spur, slopes S. Desc. 42 ft. over W. slope.
Draw, course S. Asc. 100 ft. over SE. slope.
Enter scattering timber, bears N. and S.
The cor. of secs. 13, 14, 23 and 24.

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.


Subdivision of T.36 N., R.11 W.

Chains N.0°1'W., bet. secs. 13 and 14.
 Over rolling land, through scattering timber and undergrowth.
 1.60 Rim, bears NE. and SW.
 Desc. 280 ft. over NW. slope.
 24.00 Leave timber, bears NE. and SW.
 33.01 Wash, 15 lks. wide, course NE.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



Dig pits 18 x 18 x 12 ins. one each on line N. and S. of cor. 3 ft. dist.

65.00 Road, bears NE. and SW.
 74.60 Wash, 6 lks. wide, course E.
 Asc.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to bed rock, with marked cross (+) stone alongside, in a mound of stone, for cor. of secs. 11, 12, 13 and 14, marked on brass cap




Land; rolling.
 Soil; rocky, 4th. rate.
 Timber; cedar.
 Undergrowth; sagebrush.

40.00 N.89°50'E., on a random line bet. secs. 12 and 13.
 79.80 Set temp. $\frac{1}{4}$ sec. cor.
 Fall 2 lks. S. of the cor. of secs. 7, 12, 13 and 18, on E. bdy. of Tp.; described in Book "E".

Thence
 S.89°49'W., on a true line bet. secs. 12 and 13.
 Over rolling land; through scattering timber and undergrowth.

19.54 Asc. 80 ft. over NE. slope.
 23.20 Top of ascent. Desc. 165 ft. over NW. slope to $\frac{1}{4}$ cor.
 39.90 Draw, course NW.
 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap




From which,
 A cedar, 6 ins. diam., bears N.82 $\frac{1}{2}$ °E., 538 lks. dist. marked $\frac{1}{4}$ S 12 B T
 A cedar, 6 ins. diam.; bears S.88 $\frac{3}{4}$ °E., 413 lks. dist., marked $\frac{1}{4}$ S 13 B T

47.60 Wash, 10 lks. wide, course NE.
 71.60 Road, bears NE. and SW.
 Asc. 57 ft. to
 79.80 The cor. of secs. 11, 12, 13 and 14.

Land; rolling.
 Soil; rocky, 3rd. and 4th. rate.
 Timber; cedar.
 Undergrowth; sagebrush.


Subdivision of T.36 N., R.11 W.

Chains
 5.00 N.0°1'W., bet. secs. 11 and 12.
 40.00 Over rolling land, through scattering undergrowth.
 Asc. 18 ft. over S. slope.
 Top of asc. Desc. 155 ft. over NE. slope.
 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in
 the ground for $\frac{1}{4}$ sec. cor. marked $\frac{1}{4}$ sec. cor. marked
 on brass cap



Dig pits 18 x 18 x 12 ins. one each on line N. and S.
 of cor. 3 ft. dist.

77.88 Wire fence, bears E. and W.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in
 the ground for cor. of secs. 1, 2, 11 and 12, marked
 on brass cap




Dig pits 18 x 18 x 12 ins. one in each sec. NE., SE., SW.
 and NW. of cor. 3 ft. dist.

Land; rolling.
 Soil; clay and rocky, 3rd. and 4th. rates.
 Timber; none.
 Undergrowth; sagebrush and juniper.

40.00 N.89°49'E., on a random line bet. secs. 1 and 12.
 79.80 Set temp. $\frac{1}{4}$ sec. cor.
 Fall 2 lks. N. of the cor. of secs. 1, 6, 7 and 12 on
 E. bdy. of Tp., described in Book "E".

Thence
 S.89°50'W., on a true line bet. secs. 1 and 12.
 Over rolling land, through scattering undergrowth.

13.29 Wash, 10 lks. wide, 3 ft. deep, course NE.
 14.19 Fence, bears N. and S.
 39.90 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in
 the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



Dig pits 18 x 18 x 12 ins. one each on line E. and W.
 of cor. 3 ft. dist.

51.37 Road, bears N. and S.
 71.00 Asc. 75 ft. over gradual E. slope.
 Top of ascent. Desc. 40 ft. to
 79.80 The cor. of secs. 1, 2, 11 and 12.

Land; rolling.
 Soil; rocky, 3rd. rate.
 Timber; none.
 Undergrowth; sagebrush and juniper.


Subdivision of T.36 N., R.11 W.

Chains

N.0°1'W., bet. secs. 1 and 2.
Over slightly rolling land, through scattering undergrowth.

39.80
40.00

Road, bears S.70°E. and N.70°W.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



Dig pits 18 x 18 x 12 ins. one each on line N. and S. of cor. 3 ft. dist.

57.40
65.10

Road, bears E. and W. Enter field.
Draw, course NE. Leave field. Shelly's Reservoir, bears W. 12.00 chs.


69.85

Road, bears NE. and SW. Asc. 17 ft. over SE. slope.

82.10

Intersect the 9th Standard Parallel North, 20.48 chs. S.89°47'E., of the S.C. of secs. 35 and 36, T.37 N., R.11 W., which is an iron post, 3 ins. diam., properly marked, set in a mound of stone and witnessed by a mound of stone N. of cor.

At point of intersection, set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground to bed rock, with marked cross (+) stone alongside, in a mound of stone, for closing cor. of secs. 1 and 2, marked on brass cap




Land; rolling.
Soil; loam, 1st. rate.
Timber; none.
Undergrowth; sagebrush and juniper.

From the cor. of secs. 2, 3, 34 and 35 on S. bdy. of Tp., described in Book "E",

N.0°1'W., bet. secs. 34 and 35.
Over rolling land, through scattering timber and undergrowth.

4.75
10.00
35.80
40.00

Wash, 10 lks. wide, course NE.
Old road, bears NE. and SW.
Draw, course NE. Asc.
Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap



From which,
A cedar, 14 ins. diam., bears N.23 $\frac{1}{2}$ °E., 81 lks. dist. marked $\frac{1}{4}$ S 35 B T
A pinyon, 6 ins. diam., bears S.66°W., 91 lks. dist. marked $\frac{1}{4}$ S 34 B T

50.00
65.11

Asc. 23 ft. over SE. slope.
Spur, slopes E. Desc. 50 ft. over N. slope.
Draw, course E. Asc.

Subdivision of T.36 N., R.11 W.

Chains
80.00

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground for cor. of secs. 26, 27, 34 and 35, marked on brass cap

T36N R11W
S 27 | S 26
S 34 | S 35
1924

From which,

- A cedar, 20 ins. diam., bears N.20°E., 316 lks. dist. marked T 36 N R 11 W S 26 B T
- A cedar, 10 ins. diam., bears S.7½°E., 200 lks. dist. marked T 36 N R 11 W S 35 B T
- A cedar, 10 ins. diam., bears S.4°W., 208 lks. dist. marked T 36 N R 11 W S 34 B T
- A cedar, 8 ins. diam., bears N.70½°W., 251 lks. dist. marked T 36 N R 11 W S 27 B T

Land; rolling.
Soil; clay, rocky, 3rd. and 4th. rates.
Timber; cedar and pinyon.
Undergrowth; sagebrush and juniper.

40.00
80.00

N. 89½° E., on a random line bet. secs. 26 and 35.
Set temp. ¼ sec. cor.
Fall 2 lks. N. of the cor. of secs. 25, 26, 35 and 36.

Thence
S. 89° 58' W., on a true line bet. secs. 26 and 35.
Over rolling land, through scattering timber and undergrowth.

25.25
40.00

Desc. 24 ft. over SW. slope.
Draw, course SE.
Asc. 34 ft. over NE. slope.
Set an iron post, 3 ft. long, 1 in. diam., 7 ins. in the ground to bed rock, supported in a mound of stone, for ¼ sec. cor. marked on brass cap

¼ S 26
S 35
1924

From which,

- A cedar, 14 ins. diam., bears S.18°E., 217 lks. dist. marked ¼ S 35 B T
- A cedar, 12 ins. diam., bears S.88½°W., 55 lks. dist. marked ¼ S 35 B T
- No bearing tree available in sec. 26.

43.00
61.20
80.00

Asc. gentle NE. slope.
Point of spur, slopes N.
Along N. slope.
Draw, course NE. Asc. 46 ft. over SE. slope.
The cor. of secs. 26, 27, 34 and 35.

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

35.30
40.00

N. 0° 1' W., bet. secs. 26 and 27.
Over rolling land, through scattering timber and undergrowth.
Asc. gentle SE. slope.
Ridge, bears NE. and SW. Desc.
Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bed rock, supported in a mound of stone, for ¼ sec. cor. marked on brass cap

¼
S 27 | S 26
1924

Subdivision of T.36 N., R.11 W.

Chains

From which,

A cedar, 10 ins. diam., bears S.67 $\frac{1}{2}$ °E., 68 lks. dist.
marked $\frac{1}{4}$ S 26 B TA cedar, 6 ins. diam., bears N.81 $\frac{3}{4}$ °W., 52 lks.
dist., marked $\frac{1}{4}$ S 27 B T

40.15

Wash, 10 lks. wide, course NW.

43.80

Desc. 160 ft. over N. slope.

51.50

Leave timber, bears NE. and SW.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in
the ground for cor. of secs. 22, 23, 26 and 27, marked
on brass cap

T36N R11W

S 22 | S 23

S27 | S 26

1924

Dig pits 18 x 18 x 12 ins. one in each sec. NE., SE.
SW. and NW. of cor. 3 ft. dist.

Land; rolling.

Soil; clay, rocky, 3rd. and 4th. rates.

Timber; cedar.

Undergrowth; sagebrush.

40.00

N.89°58'E., on a random line bet. secs. 23 and 26.

79.94

Set temp. $\frac{1}{4}$ sec. cor.

Fall 3 lks. N. of the cor. of secs. 23, 24, 25 and 26.

Thence

S.89°59'W., on a true line bet. secs. 23 and 26.

Over rolling land, through scattering undergrowth.

19.00

Road, bears SE. and NW.

39.97

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the
ground for $\frac{1}{4}$ sec. cor. marked on brass cap

S 23

S 26

1924

Dig pits 18 x 18 x 12 ins. one each on line E. and W.
of cor.

Asc.

46.00

Enter scattering timber, bears NE. and S.

47.50

Top of ascent. Desc. 160 ft. over W. slope to cor.

60.00

Leave timber, bears N. and S.

69.70

Draw, course N.

79.94

The cor. of secs. 22, 23, 26 and 27.

Land; rolling.

Soil; rocky, 3rd. rate.

Timber; cedar.

Undergrowth; sagebrush.

N.0°1'W., bet. secs. 22 and 23.

Over rolling land, through scattering timber and under-
growth.

6.80

Wash, 12 lks. wide, course NE.

26.05

Road, bears NE. and SW.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in
the ground to bed rock, supported in a mound of stone,
for $\frac{1}{4}$ sec. cor., marked on brass cap

S 22 | S 23

1924

From which,

Subdivision of T.36 N., R.11 W.

Chains

A cedar, 6 ins. diam., bears N.22°E., 184 lks. dist. marked $\frac{1}{4}$ S 23 B T
 A cedar, 8 ins. diam., bears N.47 3/4°W., 101 lks. dist., marked $\frac{1}{4}$ S 22 B T

55.75
63.00
80.00

Road, bears E. and W.
 Draw, course SE. Asc. gentle S. slope.
 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground for cor. of secs. 14, 15, 22 and 23, marked on brass cap

T36N R11W
 S 15 | S 14
 S22 | S 23
 1924

From which,

A cedar, 14 ins. diam., bears N.30 1/2°E., 59 lks. dist. marked T 36 N R 11 W S 14 B T
 A cedar, 15 ins. diam., bears S.8 3/4°E., 188 lks. dist., marked T 36 N R 11 W S 23 B T
 A cedar, 10 ins. diam., bears S.77 3/4°W., 140 lks. dist., marked T 36 N R 11 W S 22 B T
 A cedar, 12 ins. diam., bears N.73 3/4°W., 124 lks. dist., marked T 36 N R 11 W S 15 B T

Land; rolling.
 Soil; rocky, clay, 3rd. and 4th. rates.
 Timber; cedar and pinyon.
 Undergrowth; sagebrush.

40.00
79.90

N.89°59'E., on a random line bet. secs. 14 and 23.
 Set temp. $\frac{1}{4}$ sec. cor.
 Fall 9 lks. N. of the cor. of secs. 13, 14, 23 and 24.

Thence
 N.89°57'W., on a true line bet. secs. 14 and 23.
 Over rolling land, through scattering timber and undergrowth.

5.60
9.50
33.30
37.20
39.95

Desc. 145 ft. over-W. slope to
 Draw, course NW.
 Desc. 80 ft. over NW. slope.
 Wash, 15 lks. wide, course NE.
 Road, bears NE. and SW.
 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S 14
 S 23
 1924

Dig pits 18 x 18 x 12 ins. one each on line E. and W. of cor. 3 ft. dist.

79.90

Asc. 112 ft. over gentle SE. slope.
 The cor. of secs. 14, 15, 22 and 23.

Land; rolling.
 Soil; rocky, 3rd. rate.
 Timber; cedar.
 Undergrowth; sagebrush.

40.00

N.0°1'W., bet. secs. 14 and 15.
 Over rolling land, through scattering timber and undergrowth.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$
 S 15 | S 14
 1924


Subdivision of T.36 N., R.11 W.

Chains

Dig pits 18 x 18 x 12 ins. one each on line N. and S. of cor. 3 ft. dist.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with marked cross (+) stone alongside for cor. of secs. 10, 11, 14 and 15, marked on brass cap



From which,

A cedar, 7 ins. diam., bears S.66½°W., 465 lks. dist. marked T 36 N R 11 W S 15 B T
No other trees near.

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

40.00
79.96


S.89°57'E., on a random line bet. secs. 11 and 14.
Set temp. ¼ sec. cor.
Intersect the cor. of secs. 11, 12, 13 and 14.

Thence

N.89°57'W., on a true line bet. secs. 11 and 14.
Over rolling land, through scattering timber and undergrowth.

16.75
39.98

Draw, course SE. Asc. gentle E. slope.
Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground with marked cross (+) stone alongside for ¼ sec. cor. marked on brass cap



From which,

A cedar, 12 ins. diam., bears S.51¼°W., 529 lks. dist. marked ¼ S 14 B T

79.96


Asc. gentle E. slope.
The cor. of secs. 10, 11, 14 and 15.

Land; rolling.
Soil; rocky, 3rd. rate.
Timber; cedar.
Undergrowth; sagebrush.

N.0°1'W., bet. secs. 10 and 11.
Over rolling land, through scattering undergrowth.
Desc. 100 ft. over NW. slope.

26.07
40.00

Draw, course NE. Asc. SE. slope.
Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, with marked cross (+) stone alongside, in a mound of stone, for ¼ sec. cor. marked on brass cap



80.00

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground for cor. of secs. 2, 3, 10 and 11, marked on brass cap

Subdivision of T.36 N., R.11 W.

Chains

T36N	R11W
S 3	S 2
S 10	S 11
1924	

Raise a mound of stone, 3 ft. base, 1½ ft. high W. of cor.

Land; rolling.
Soil; rocky, 4th. rate.
Timber; none.
Undergrowth; sagebrush.

40.00
79.96

S.89°57'E., on a random line bet. secs. 2 and 11.
Set temp. ¼ sec. cor.
Intersect the cor. of secs. 1, 2, 11 and 12.

Thence
N.89°57'W., on a true line bet. secs. 2 and 11.
Over gently rolling land, through scattering undergrowth.

4.20
15.50
39.98

Shelly's House, bears N.40½°E.
Fence, bears N. and S.
Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bed rock, supported in a mound of stone, for ¼ sec. cor. marked on brass cap

¼	S 2
	S 11
1924	

Dig pits 18 x 18 x 12 ins. one each on line E. and W. of cor. 3 ft. dist.

79.96

Asc. 100 ft. over NE. slope.
The cor. of secs. 2, 3, 10 and 11.

Land; rolling.
Soil; rocky, 3rd. rate.
Timber; none.
Undergrowth; sagebrush.

21.37
23.67
40.00

N.0°1'W., bet. secs. 2 and 3.
Over rolling land, through scattering undergrowth.
Desc. 50 ft. over NW. slope.

Draw, course NE.
Road, bears NE. and SW.
Along E. slope.
Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bed rock, with marked cross (+) stone alongside, in a mound of stone, for ¼ sec. cor. marked on brass cap

¼	S 3	S 2
1924		

82.40

Intersect the 9th. Standard Parallel North, 20.62 chs. S.89°45'E., of the S.C. of secs. 34 and 35, T.37 N., R.11 W., which is an iron post, 3 ins. diam., 12 ins. above ground, firmly set, properly marked, and witnessed by a mound of stone N. of cor.

At point of intersection, set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground to bed rock, with marked cross (+) stone alongside, in a mound of stone, for closing cor. of secs. 2 and 3, marked on brass cap

Subdivision of T.36 N., R.11 W.

Chains

T37N R11W
S 35
S 3 | S 2
T36N R11W
C C
1924

Land; rolling.
Soil; rocky, 4th. rate.
Timber; none.
Undergrowth; sagebrush.

From the cor. of secs. 3, 4, 33 and 34 on S. bdy. of Tp. described in Book "F", N.0°2'W., bet. secs. 33 and 34:
Over rolling land, through scattering timber and undergrowth.

32.50
36.00
40.00

Wash, 5 lks. wide, 6 ft. deep, course NE.
Road, bears NE. and SW.
Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$
S 33 | S 34
1924

From which,
A cedar, 10 ins. diam., bears S.81°E., 636 lks. dist. marked $\frac{1}{4}$ s 34 B T
A cedar, 4 ins. diam., bears S.30 $\frac{3}{4}$ °W., 285 lks. dist., marked $\frac{1}{4}$ S 33 B T

61.50
80.00

Wash, 6 lks. wide, 4 ft. deep, course NW.
Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to bed rock, supported in a mound of stone, for cor. of secs. 27, 28, 33 and 34, marked on brass cap

T36N R11W
S 28 | S 27
S 33 | S 34
1924

From which,
A cedar, 16 ins. diam., bears N.10 $\frac{3}{4}$ °E., 57 lks. dist., marked T 36 N R 11 W S 27 B T
A cedar, 10 ins. diam., bears S.23°E., 125 lks. dist. marked T 36 N R 11 W S 34 B T
A cedar, 12 ins. diam., bears S.51°W., 67 lks. dist. marked T 36 N R 11 W S 33 B T
A cedar, 8 ins. diam., bears N.40 $\frac{1}{2}$ °W., 91 lks. dist. marked T 36 N R 11 W S 28 B T

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

40.00
80.08

N.89°57'E., on a random line bet. secs. 27 and 34.
Set temp. $\frac{1}{4}$ sec. cor.
Intersect the cor. of secs. 26, 27, 34 and 35.

Thence
S.89°57'W, on a true line bet. secs. 27 and 34.
Over rolling land, through scattering timber and undergrowth.

15.00

Asc. 80 ft. over SE. slope.
Head of draw, course SE.
Continue ascent.

29.30

Top of cliff, bears NE. and SW.
Desc. 185 ft. over W. slope.

Subdivision of T.36 N., R.11 W.

Chains
40.04

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S 27
 $\frac{1}{4}$ S 34
1924

From which,

- A cedar, 6 ins. diam., bears N.87 $\frac{1}{2}$ °E., 364 lks. dist. marked $\frac{1}{4}$ S 27 B T
- A cedar, 12 ins. diam., bears S.67°E., 185 lks. dist. marked $\frac{1}{4}$ S 34 B T

53.00
53.30

Desc. 37 ft. over W. slope.
Wash, 10 lks. wide, course NE.
Road, bears NE. and SW.
Asc. 127 ft. over E. slope.
Spur, slopes NE. Desc. 30 ft. over W. slope.
The cor. of secs. 27, 28, 33 and 34.

75.00
80.08

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

N.0°2'W., bet. secs. 27 and 28.
Over rolling land, through scattering timber and undergrowth.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$
S 28 | S 27
1924

From which,

- A cedar, 3 ins. diam., bears S.9 $\frac{1}{2}$ °E., 266 lks. dist. marked B T
- A cedar, 14 ins. diam., bears S.8°W., 283 lks. dist. marked $\frac{1}{4}$ S 28 B T

40.50
47.60

Wash, course NE. Asc. 60 ft. over SE. slope.
Small knoll, bears E. and W.
Desc. 50 ft. over N. slope.

55.30
59.60

Wash, course NE.
Road, bears NE. and SW.
Asc. 106 ft. over S. slope.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bed rock, supported in a mound of stone, for cor. of secs. 21, 22, 27 and 28, marked on brass cap

T36N R11W
S 21 | S 22
S 28 | S 27
1924

From which,

- A cedar, 14 ins. diam., bears N.70°E., 25 lks. dist. marked T 36 N R 11 W S 22 B T
- A cedar, 12 ins. diam., bears S.69 $\frac{1}{2}$ °E., 21 lks. dist. marked T 36 N R 11 W S 27 B T
- A cedar, 8 ins. diam., bears S.39°W., 37 lks. dist. marked T 36 N R 11 W S 28 B T
- A cedar, 14 ins. diam., bears N.69 $\frac{1}{2}$ °W., 88 lks. dist. marked T 36 N R 11 W S 21 B T

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

Subdivision of T.36 N., R.11 W.

Chains

40.00
80.06

N.89°57'E., on a random line bet. secs. 22 and 27.
Set temp. $\frac{1}{4}$ sec. cor.
Intersect the cor. of secs. 22, 23, 26 and 27.

Thence
S.89°57'W., on a true line bet. secs. 22 and 27.
Over rolling land, through scattering undergrowth.

9.90
16.95
23.84
40.03

Wash, 8 lks. wide, course NE.
Wash, 10 lks. wide, course NE.
Road, bears NE. and SW.
Asc. gentle E. slope.
Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bed rock, with marked cross (+) stone alongside, in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap

S 22
S 27
1924

From which,
A cedar, 10 ins. diam., bears N.15°E., 90 lks. dist. marked $\frac{1}{4}$ S 22 B T
No other tree near.

69.24
80.06

Asc. 110 ft. over SE. slope.
Road, bears NE. and SW.
The cor. of secs. 21, 22, 27 and 28.

Land; rolling.
Soil; clay, 3rd. rate.
Timber; none.
Undergrowth; sagebrush.

N.0°2'W., bet. secs. 21 and 22.
Over rolling land, through scattering timber and undergrowth.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$
S 21 | S 22
1924

From which,
A cedar, 12 ins. diam., bears S.64 $\frac{1}{4}$ °E., 168 lks. dist., marked $\frac{1}{4}$ S 22 B T
A cedar, 14 ins. diam., bears S.56°W., 104 lks. dist. marked $\frac{1}{4}$ S 21 B T

45.40

Draw, course NE.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground with marked cross (+) stone alongside, for cor. of secs. 15, 16, 21 and 22, marked on brass cap

T36N R11W
S 16 | S 15
S 21 | S 22
1924

From which,
A cedar, 18 ins. diam., bears S.7°E., 316 lks. dist. marked T 36 N R 11 W S 22 B T
A cedar, 10 ins. diam., bears S.18 $\frac{3}{4}$ °W., 306 lks. dist., marked T 36 N R 11 W S 21 B T
No other trees near.

Land; rolling.
Soil; clay and rocky, 3rd. and 4th. rates.
Timber; cedar and pinyon. Undergrowth; sagebrush.

Subdivision of T.36 N., R.11 W.

Chains N.89°57'E., on a random line bet. secs. 15 and 22.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.18 Fall 9 lks. S. of the cor. of secs. 14, 15, 22 and 23.

Thence
 S.89°53'W., on a true line bet. secs. 15 and 22.
 Over rolling land, through scattering timber and undergrowth.

40.09 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S 15
 S 22
 1924

From which,
 A cedar, 18 ins. diam., bears N.21 $\frac{1}{4}$ °E., 40 lks. dist. marked $\frac{1}{4}$ S 15 B T
 A cedar, 10 ins. diam., bears S.48 3.4°E., 46 lks. dist., marked $\frac{1}{4}$ S 22 B T

56.50 Asc. 100 ft. over gradual SE. slope.
 79.70 Top of ascent. Desc. 64 ft. over gentle SW. slope.
 80.18 Road, bears SE. and NW.
 The cor. of secs. 15, 16, 21 and 22.

Land; rolling.
 Soil; rocky, 3rd. rate.
 Timber; cedar.
 Undergrowth; sagebrush.

N.0°2'W., bet. secs. 15 and 16.
 Over rolling land, through scattering timber and undergrowth.

.20 Road, bears E. and W.
 .80 Draw, course E. Asc. 75 ft. over S. slope.
 30.00 Spur, slopes E. Desc. 30 ft.
 35.80 Draw, course E. Asc.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground to bed rock, supported in a mound of stone for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$
 S 16 | S 15
 1924

From which,
 A cedar, 8 ins. diam., bears S.49 $\frac{1}{4}$ °E., 225 lks. dist. marked $\frac{1}{4}$ S 15 B T
 A cedar, 10 ins. diam., bears S.87 3/4°W., 55 lks. dist. marked $\frac{1}{4}$ S 16 B T

55.00 Head of draw, course NE.
 68.50 Desc. 90 ft. to
 77.50 Draw, course NE.
 78.30 Road, bears NE. and SW.
 Asc. 19 ft.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bed rock, supported in a mound of stone, with marked cross (+) stone alongside base of post, for cor. of secs. 9, 10, 15 and 16, marked on brass cap

T36N R11W
 S 9 | S 10
 S 16 | S 15
 1924

From which,

Subdivision of T.36 N., R.11 W.

Chains. A cedar, 4 ins. diam., bears S.25°W., 97 lks. dist. marked B T
A cedar, ins. diam., bears N.83 3/4°W., 281 lks. dist., marked T 36 N R 11 W S 9 B T

Land; rolling.
Soil; rocky, 3rd. and 4th. rate.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

40.00 N.89°53'E., on a random line bet. secs. 10 and 15.
80.10 Set temp. 1/4 sec. cor.
Intersect the cor. of secs. 10, 11, 14 and 15.

Thence
3.89°53'W., on a true line bet. secs. 10 and 15.
Over rolling land, through scattering timber and undergrowth.

40.05 Set an iron post, 3 ft. long, 1 in. diam., 4 ins. in the ground to bed rock, supported in a mound of stone, for 1/4 sec. cor. marked on brass cap

S 10
S 15
1924

From which,
A cedar, 12 ins. diam., bears N.58 3/4°E., 117 lks. dist., marked 1/4 S 10 B T
A cedar, 14 ins. diam., bears S.61 1/2°W., 514 lks. dist., marked 1/4 S 15 B T

75.00 Draw, course NE.
75.40 Road, bears NE. and SW.
80.10 The cor. of secs. 9, 10, 15 and 16.

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

N.0°2'W., bet. secs. 9 and 10.
Over rolling land, through scattering timber and undergrowth.

12.40 asc. over S. slope.
28.000 Spur, slopes NE. Desc. 90 ft. over NW. slope.
28.51 Wash, 8 lks. wide, course NE.
31.40 Road, bears NE. and SW. Asc. 75 ft.
40.00 Desc.
Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for 1/4 sec. cor. marked on brass cap

1/4
S 9 | S 10
1924.

Dig pits 18 x 18 x 12 ins. one each on line N. and S. of cor. 3 ft. dist.

55.00 Asc. 65 ft. over SE. slope.
78.20 Desc. 35 ft. to
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground for cor. of secs. 3, 4, 9 and 10, marked on brass cap

T36N R11W
S 4 | S 3
S 9 | S 10
1924

Subdivision of T.36 N., R.11 W.

Chains

From which,
 A cedar, 4 ins. diam., bears N.51°E., 197 lks. dist. marked B T
 A cedar, 14 ins. diam., bears S.86°E., 82 lks. dist. marked T 36 N R 11 W S 10 B T
 A cedar, 4 ins. diam., bears S.2 3/4°W., 134 lks. dist., marked B T
 A cedar, 6 ins. diam., bears N.44°W., 85 lks. dist. marked T 36 N R 11 W S 4 B T

Land; rolling.
 Soil; rocky, 3rd. and 4th. rates.
 Timber; cedar and pinyon.
 Undergrowth; sagebrush.

40.00 N.89°53'E., on a random line bet. secs. 3 and 10
 80.00 Set temp. 1/4 sec. cor.
 Fall, 2 lks. W. of the cor. of secs. 2, 3, 10 and 11.

Thence
 S.89°54'W., on a true line bet. secs. 3 and 10.
 Over rolling land, through dense sagebrush.
 Desc. 40 ft. over gentle NW. slope.

15.00 Draw, course N. Asc.
 28.80 Draw, course NE.
 29.10 Road, bears NE. and SW. Asc.
 37.50 Spur, slopes N.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bed rock, with marked cross (+) stone, alongside, in a mound of stone, for 1/4 sec. cor. marked on brass cap

1/4 S 3
 S 10
 1924

46.95 Desc. 50 ft. to
 48.80 Wash, 10 lks. wide, course N.
 70.00 Road, bears N. and S.
 80.00 Desc. 75 ft. over NW. slope.
 The cor. of secs. 3, 4, 9 and 10.

Land; rolling.
 Soil; rocky, 4th. rate.
 Timber; none.
 Undergrowth; sagebrush.

9.65 N.0°2'W., bet. secs. 3 and 4.
 10.15 Over rolling land, through scattering timber and undergrowth.
 31.40 Desc. 80 ft. over N. slope.
 35.92 Wash, 8 lks. wide, course E.
 40.00 Road, bears E. and W.
 Asc. 150 ft. over SE. slope.
 Point of spur, slopes NE.
 Desc. 75 ft. to
 Draw, course E. Asc. 80 ft. to
 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bed rock, with marked cross (+) stone alongside, supported in a mound of stone, for 1/4 sec. cor. marked on brass cap

1/4 S 4
 S 3
 1924

41.80 Asc. 18 ft. over S. slope.
 Spur, slopes E. Desc. 100 ft. over N. slope.

Subdivision of T.36 N., R.11 W.

Chains
51.65

Draw, course E. Asc. 110 ft. over SE. slope.

82.95

Intersect the 9th. Standard Parallel North, 20.72 chs. S.89°48'E., of the S.C. of secs. 33 and 34, T.37 N., R.11 W., which is an iron post, 3 ins. diam., 26 ins. above ground, in a mound of stone, firmly set, properly marked, and witnessed by a mound of stone N. of cor.

At point of intersection, set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to bed rock, with marked cross (+) stone alongside, in a mound of stone, for closing cor. of secs. 3 and 4, marked on brass cap

T37N R11W
S 34
S 4 | S 3
T36N R11W
C C
1924

Land; rolling.
Soil; rocky, 3rd. and 4th. rates.
Timber; cedar.
Undergrowth; sagebrush.

From the cor. of secs. 4, 5, 32 and 33, on S. bdy. of Tp., described in Book "E", N.0°3'W., bet. secs. 32 and 33. Over rolling land, through scattering timber and undergrowth.

Asc. 57 ft.

15.00 Desc. 80 ft. over N. slope.

39.90 Draw, course NE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

S 32 | S 33

1924

From which,

A cedar, 6 ins. diam., bears N.86 $\frac{1}{2}$ °E., 203 lks. dist. marked $\frac{1}{4}$ S 33 B T

A cedar, 8 ins. diam., bears N.57 $\frac{1}{2}$ °W., 242 lks. dist. marked $\frac{1}{4}$ S 32 B T

Asc.

49.00 Desc. 50 ft. to

56.53 Draw, course NW. Asc. 30 ft.

60.90 Desc. 50 ft.

70.12 Draw, course NE.

80.00 Set an iron post, 3 ft. long; 2 ins. diam.; 28 ins. in the ground for cor. of secs. 28, 29, 32 and 33. marked on brass cap

T36N R11W
S 29 | S 28
S 32 | S 33
1924

From which,

A cedar, 20 ins. diam., bears N:77°E., 280 lks. dist. marked T 36 N R 11 W S 28 B T

A cedar, 16 ins. diam., bears S.47 $\frac{3}{4}$ °W., 237 lks. dist. marked T 36 N R 11 W S 32 B T

A cedar, 12 ins. diam., bears N.43°W., 217 lks. dist. marked T 36 N R 11 W S 29 B T

Raise a mound of stone, 3 ft. base, 2 ft. high W. of cor.

Land; rolling. Soil; rocky, 4th. rate.
Timber; cedar and pinyon. Undergrowth; sagebrush.

Subdivision of T.36 N., R.11 W.

Chains
40.00 N.89°57'E., on a random line bet. secs. 28 and 33.
79.92 Set temp. $\frac{1}{4}$ sec. cor.
Fall 9 lks. N. of the cor. of secs. 27, 28, 33 and 34.

Thence
N.89°59'W., on a true line bet. secs. 28 and 33.
8.00 Desc. 74 ft. over W. slope.
Draw, course NE. Road, bears NE. and SW.
22.90 Asc. 133 ft. over E. slope to
Spur, slopes N.
33.31 Desc. 74 ft. over W. slope.
Draw, course NE.
39.96 Asc. 60 ft. over SE. slope.
Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in
the ground to bed rock, supported in a mound of stone,
for $\frac{1}{4}$ sec. cor. marked on brass cap

$$\frac{1}{4} \begin{array}{r} S 28 \\ S 33 \\ \hline 1924 \end{array}$$

From which,
A cedar, 12 ins. diam., bears N.1 3/4°W., 86 lks.
dist., marked $\frac{1}{4}$ S 28 B T
A cedar, 14 ins. diam., bears S.46 3/4°E., 73 lks.
dist., marked $\frac{1}{4}$ S 33 B T

79.92 The cor. of secs. 28, 29, 32 and 33.

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

N.0°3'W., bet. secs. 28 and 29.
Over rolling land, through scattering timber and under-
growth.

22.25 Wash, 15 lks. wide, 8 ft. deep, course NE.
30.95 Road, bears NE. and SW.
Asc. 130 ft. over S.W. slope.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in
the ground to bed rock, supported in a mound of stone,
for $\frac{1}{4}$ sec. cor. marked on brass cap

$$\frac{1}{4} \begin{array}{r} S 29 \\ S 28 \\ \hline 1924 \end{array}$$

From which,
A cedar, 8 ins. diam., bears S.48 3/4°E., 106 lks.
dist., marked $\frac{1}{4}$ S 28 B T
A cedar, 12 ins. diam., bears S.71°W., 129 lks.
dist., marked $\frac{1}{4}$ S 29 B T

Asc. 100 ft. over S.W. slope.
64.10 Desc.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in
the ground to bed rock, supported in a mound of stone,
for cor. of secs. 20, 21, 28 and 29, marked on brass
cap

$$\begin{array}{r} T36N R11W \\ S 20 | S 21 \\ S 29 | S 28 \\ \hline 1924 \end{array}$$

From which,
A cedar, 8 ins. diam., bears N.45 1/4°E., 113 lks. dist.
marked T 36 N R 11 W S 21 B T
A cedar, 6 ins. diam., bears S.44°E., 206 lks. dist.
marked T 36 N R 11 W S 28 B T
A cedar, 7 ins. diam., bears S.2 3/4°W., 113 lks.

Subdivision of T.36 N., R.11 W.

Chains

marked T 36 N R 11 W S 29 B T
 A cedar, 14 ins. diam., bears N.64 $\frac{1}{4}$ °W., 50 lks. dist.
 marked T 36 N R 11 W S 20 B T

Land; rolling.
 Soil; rocky, 4th. rate.
 Timber; cedar and pinyon.
 Undergrowth; sagebrush.

40.00 S.89°59'E., on a random line bet. secs. 21 and 28.
 79.98 Set temp. $\frac{1}{4}$ sec. cor.
 Fall 2 lks. S. of the cor. of secs. 21, 22, 27 and 28.

Thence
 West, on a true line bet. secs. 21 and 28.
 Over rolling land, through scattering timber and undergrowth.

15.00 Desc. 74 ft. over SW. slope.
 39.99 Draw, course SE.
 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap

S 21
 S 28
 1924

From which,
 A cedar, 12 ins. diam., bears N.32°W., 372 lks. dist.
 marked $\frac{1}{4}$ S 21 B T
 A cedar, 8 ins. diam., bears S.76 $\frac{1}{2}$ °W., 531 lks. dist.
 marked $\frac{1}{4}$ S 28 B T

79.98 Asc. 100 ft. over SE. slope.
 The cor. of secs. 20, 21, 28 and 29.

Land; rolling.
 Soil; rocky, 4th. rate.
 Timber; cedar.
 Undergrowth; sagebrush.

N.0°3'W., bet. secs. 20 and 21.
 Over rolling land, through scattering timber and undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap

S 20 | S 21
 1924

From which,
 A cedar, 12 ins. diam., bears N.26°E., 15 lks. dist.
 marked $\frac{1}{4}$ S 21 B T
 A cedar, 6 ins. diam., bears S.43 $\frac{3}{4}$ °W., 64 lks. dist.
 marked $\frac{1}{4}$ S 20 B T

41.60 Road, bears NE. and SW.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground for cor. of secs. 16, 17, 20, and 21, marked on brass cap

T36N R11W
 S 17 | S 16
 S 20 | S 21
 1924

From which,

Subdivision of T.36 N., R.11 W.

Chains

A cedar, 12 ins. diam., bears S. $81\frac{1}{2}^{\circ}$ W., 448 lks. dist.
marked T 36 N R 11 W S 20 B T
A cedar, 10 ins. diam., bears N. $74\frac{3}{4}^{\circ}$ W., 96 lks.
dist., marked T 36 N R 11 W S 17 B T
No other trees near.

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

40.00 East, on a random line bet. secs. 16 and 21
80.02 Set temp. $\frac{1}{4}$ sec. cor.
Fall 9 lks. N. of the cor. of secs. 15, 16, 21 and 22.

Thence
N. $89^{\circ}56'$ W., on a true line bet. secs. 16 and 21.
Over rolling land, through scattering timber and under-
growth.

17.80 Draw, course NE and S.
40.01 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S 16
S 21
1924

From which,
A cedar, 24 ins. diam., bears N. $13\frac{1}{2}^{\circ}$ E., 237 lks.
dist., marked $\frac{1}{4}$ S 16 B T
A cedar, 12 ins. diam., bears S. 14° E., 621 lks. dist.
marked $\frac{1}{4}$ S 21 B T

54.30 Road, bears NE. and S.
75.70 Road, bears N. and S.
80.02 The cor. of secs. 16, 17, 20 and 21.

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar and piñon.
Undergrowth; sagebrush.

N. $0^{\circ}3'$ W., bet. secs. 16 and 17.
Over rolling land, through scattering timber and under-
growth.

8.00 Road, bears SE. and NW.
36.33 Road, bears NE. and SW. in draw, course NE.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$
S 17 | S 16
1924

From which,
A cedar, 6 ins. diam., bears N. $11\frac{3}{4}^{\circ}$ E., 680 lks.
dist., marked $\frac{1}{4}$ S 16 B T
A cedar, 6 ins. diam., bears N. $4\frac{3}{4}^{\circ}$ W., 850 lks.
dist., marked $\frac{1}{4}$ S 17 B T

47.00 Reservoir, bears N. $71\frac{3}{4}^{\circ}$ E., 22 chs. dist.
Asc. 185 ft. over SW. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in
the ground to bed rock, supported in a mound of stone,
for cor. of secs. 8, 9, 16 and 17, marked on brass cap

Subdivision of T.36 N., R.11 W.

Chains

T36N R11W
S 8 | S 9
S 17 | S 16
1924

From which,

- A cedar, 6 ins. diam., bears N.67 3/4°E., 167 lks. dist., marked T 36 N R11 W S 9 B T
- A cedar, 5 ins. diam., bears S.67 3/4°E., 130 lks. dist., marked T 36 N R11 W S 16 B T
- A cedar, 8 ins. diam., bears S.32°W., 179 lks. dist. marked T 36 N R 11 W S 17 B T
- A cedar, 6 ins. diam., bears N.35°W., 40 lks. dist. marked T 36 N R 11 W S 8 B T

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

40.00
79.98

S.89°56'E., on a random line bet. secs. 9 and 16.
Set temp. 1/4 sec. cor.
Fall 4 lks. S. of the cor. of secs. 9, 10, 15 and 16.

Thence
N.89°58'W., on a true line bet. secs. 9 and 16.
Over rolling land, through scattering timber and undergrowth.

27.00
39.99

Road, bears NE. and SW.
Set an iron post, 3 ft. long, 1 in. diam. 30 ins. in the ground for 1/4 sec. cor. marked on brass cap

S 9
S 16
1924

From which,

- A cedar, 14 ins. diam., bears N.24 1/2°W., 68 lks. dist. marked 1/4 S 9 B T
- A cedar, 12 ins. diam., bears S.3°W., 126 lks. dist. marked 1/4 S 16 B T

Asc. 150 ft. over S. slope.
Top of ascent.
The cor. of secs. 8, 9, 16 and 17.

52.60
79.98

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

N.0°3'W., bet. secs. 8 and 9.
Over rolling land, through scattering timber and undergrowth.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bed rock, supported in a mound of stone, for 1/4 sec. cor. marked on brass cap

S 8 | S 9
1924

From which,

- A cedar, 5 ins. diam., bears S.11 3/4°E., 172 lks. dist., marked 1/4 S 9 B T
- A cedar, 14 ins. diam., bears N.60 1/2°W., 232 lks. dist., marked 1/4 S 8 B T


80.00

Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in

Subdivision of T.36 N., R.11 W.

Chains

the ground to bed rock, with marked cross (+) stone alongside, supported in a mound of stone, for cor. of secs. 4, 5, 8 and 9, marked on brass cap



Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.


40.00
80.12

S.89°58'E., on a random line bet. secs. 4 and 9.
Set temp. $\frac{1}{4}$ sec. cor.
Fall 9 lks. N. of the cor. of secs. 3, 4, 9 and 10.

Thence
N.89°54'W., on a true line bet. secs. 4 and 9.
Over rolling land; through scattering timber and undergrowth.

24.00
32.40
40.06

Draw, course NE. Asc. 75 ft.
Desc. 70 ft. *SB. 54' : DEFW, COURSE NE.*
Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, with marked cross (+) stone alongside, supported in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap



53.84

Draw, course N.

80.12

The cor. of secs. 4, 5, 8 and 9.


Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

18.64
19.64

N.0°3'W., bet. secs. 4 and 5.
Over rolling land, through scattering timber and undergrowth.
Desc. 70 ft. over NW. slope.
Road, bears NE. and SW.
Wash, 10 lks. wide, 3 ft. deep, course NE.
Asc. 125 ft. over SE. slope.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bed rock, with marked cross (+) stone alongside, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap




83.10

Intersect the 9th. Standard Parallel North, 20.54 chs.
S.89°46'E., of the S.C. of secs. 32 and 33, T.37 N., R. 11W., which is an iron post, 3 ins. diam., 12 ins. above ground, firmly set, properly marked, and witnessed by a mound of stone N. of cor.

At point of intersection, set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to bed rock, with marked cross (+) stone alongside, in a mound of stone

Subdivision of T.36 N., R.11 W.


Chains for closing cor. of secs. 4 and 5, marked on brass cap




Land; rolling.
Soil; rocky, 4th. rate.
Undergrowth; sagebrush.
Timber; cedar.

From the cor. of secs. 5, 6, 31 and 32 on S. bdy. of T. described in Book "E", N.0°3'W., bet. secs. 31 and 32. Over rolling land, through scattering timber and undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bed rock, with marked cross (+) stone alongside, supported in a mound of stone, for 1/4 sec. cor. marked on brass cap



48.67 Draw, course NE.
49.37 Road, bears NE. and SW.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to bed rock, with marked cross (+) stone alongside, supported in a mound of stone, for cor. of secs. 29, 30, 31 and 32, marked on brass cap



From which,
A cedar, 8 ins. diam., bears N.59 3/4°E., 495 lks. dist., marked T 36 N R 11 W S 29 B T
A cedar, 12 ins. diam., bears N.12 1/2°W., 434 lks. dist., marked T 36 N R 11 W S 30 B T
No other trees near.

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

40.00 N.89°57'E., on a random line bet. secs. 29 and 32.
80.00 Set temp; 1/4 sec. cor.
Fall 9 lks. N. of the cor. of secs. 28, 29, 32 and 33.

Thence
N.89°59'W., on a true line bet. secs. 29 and 32.
Over rolling land, through scattering timber and undergrowth.

18.64 Asc. 40 ft.
Spur, slopes N.
Desc. 90 ft. over NW. slope.
28:80 Wash, 15 lks. wide, 10 ft. deep, course NE.
30.50 Wash, 15 lks. wide, 10 ft. deep, course NE.
31.50 Road, bears NE. and SW.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bed rock, with marked cross (+) stone alongside, supported in a mound of stone, for 1/4 sec.

Subdivision of T.36 N., R.11 W.

Chains

cor. marked on brass cap

$$\frac{1}{4} \begin{array}{r} S 29 \\ S 32 \\ 1924 \end{array}$$

80.00 The cor. of secs. 29, 30, 31 and 32.

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

40.00 S.89°57'W., on a random line bet. secs. 30 and 31.
Set temp. $\frac{1}{4}$ sec. cor.78.59 Intersect the cor. of secs. 25, 30, 31 and 36 on W. bdy.
of Tp., hereinbefore described.

Thence

N.89°57'E., on a true line bet. secs. 30 and 31.
Over rolling land, through scattering timber and under-
growth.

8.86 Road, bears NE. and SW.

38.59 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in
the ground to bed rock, supported in a mound of stone,
for $\frac{1}{4}$ sec. cor. marked on brass cap
$$\frac{1}{4} \begin{array}{r} S 30 \\ S 31 \\ 1924 \end{array}$$

From which,

A cedar, 10 ins. diam., bears N.70 $\frac{1}{2}$ °W., 52 lks.
dist., marked $\frac{1}{4}$ S 30 B TA cedar, 8 ins. diam., bears S.39°W., 54 lks. dist.
marked $\frac{1}{4}$ S 31 B T

45.00 Desc. 125 ft. over SE. slope to

78.59 The cor. of secs. 29, 30, 31 and 32.

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

N.0°3'W., bet. secs. 29 and 30.

Over rolling land, through scattering timber and under-
growth.

Asc. 96 ft. over SE. slope.

9.00 Top of ascent.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in
the ground for $\frac{1}{4}$ sec. cor. marked on brass cap
$$\frac{1}{4} \begin{array}{r} S 30 \quad | \quad S 29 \\ 1924 \end{array}$$

From which,

A cedar, 14 ins. diam., bears N.9 $\frac{1}{4}$ °E., 561 lks.
dist., marked $\frac{1}{4}$ S 29 B TA cedar, 5 ins. diam., bears S.25 $\frac{3}{4}$ °W., 175 lks.
dist., marked $\frac{1}{4}$ S 30 B T80.00 Set an iron post, 3 ft. long, 2 ins. diam., on ledge of
rock, supported in a mound of stone, for cor. of secs.
19, 20, 29 and 30, marked on brass cap

Subdivision of T.36 N., R.11 W.

Chains

T36N R11W
S 19 | S 20
S 30 | S 29
1924

From which,

- A cedar, 7 ins. diam., bears N.66 $\frac{1}{2}$ °E., 144 lks. dist., marked T 36 N R 11 W S 20 B T
- A cedar, 16 ins. diam., bears S.23 $\frac{3}{4}$ °E., 130 lks. dist., marked T 36 N R 11 W S 29 B T
- A cedar, 18 ins. diam., bears S.47 $\frac{3}{4}$ °W., 177 lks. dist., marked T 36 N R 11 W S 30 B T
- A cedar, 18 ins. diam., bears N.28 $\frac{1}{4}$ °W., 63 lks. dist., marked T 36 N R 11 W S 19 B T

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

40.00
80.02

S.89°59'E., on a random line bet. secs. 20 and 29.
Set temp. $\frac{1}{4}$ sec. cor.
Fall 4 lks. S. of the cor. of secs. 20, 21, 28 and 29.

Thence
S.89°59'W., on a true line bet. secs. 20 and 29.
Over rolling land, through scattering timber and undergrowth.

40.01

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S20
S 29
1924

From which,

- A cedar, 10 ins. diam., bears N.5 $\frac{3}{4}$ °W., 41 lks. dist., marked $\frac{1}{4}$ S 20 B T
- A cedar, 10 ins. diam., bears S.27°W., 46 lks. dist. marked $\frac{1}{4}$ S 29 B T

80.02

The cor. of secs. 19, 20, 29 and 30.

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

40.00
78.49

S.89°57'W., on a random line bet. secs. 19 and 30.
Set temp. $\frac{1}{4}$ sec. cor.
Fall 14 lks. N. of the cor. of secs. 19, 24, 25 and 30, on W. bdy. of Tp., hereinbefore described.

Thence
N.89° 51'E., on a true line bet. secs. 19 and 30.
Over rolling land, through scattering timber and undergrowth.

38.49

Desc. 80, ft.
Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S 19
S 30
1924

From which,

- A cedar, 8 ins. diam., bears N.14°E., 41 lks. dist. marked $\frac{1}{4}$ S 19 B T
- A cedar, 7 ins. diam., bears S.48 $\frac{3}{4}$ °W., 350 lks. dist., marked $\frac{1}{4}$ S 30 B T

Subdivision of T.36 N., R.11 W.

Chains

43.50
61.87
63.27
78.49


Desc. 63 ft.
Draw, course NE.
Road, bears NE. and SW.
Asc. 74 ft. over NW. slope.
The cor. of secs. 19, 20, 29 and 30.

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

N.0°3'W., bet. secs. 19 and 20.
Over rolling land, through scattering timber and undergrowth.
Desc.

40.00


Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, supported in a mound of stone for $\frac{1}{4}$ sec. cor. marked on brass cap



From which,
A cedar, 12 ins. diam., bears N.71 $\frac{1}{2}$ °E., 61 lks. dist., marked $\frac{1}{4}$ S 20 B T
A cedar, 16 ins. diam., bears S.51°W., 143 lks. dist. marked $\frac{1}{4}$ S 19 B T

45.00
62.70
80.00

Asc. 125 ft. over SE. slope.
Desc. gentle NW. slope.
Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to bed rock, supported in a mound of stone, for cor. of secs. 17, 18, 19 and 20, marked on brass cap



From which,
A cedar, 12 ins. diam., bears N.47 $\frac{1}{2}$ °E., 45 lks. dist. marked T 36 N R 11 W S 17 B T
A cedar, 18 ins. diam., bears S.66°E., 200 lks. dist. marked T 36 N R 11 W S 20 B T
A cedar, 10 ins. diam., bears S.38 $\frac{3}{4}$ °W., 392 lks. dist., marked T 36 N R 11 W S 19 B T
A cedar, 3 ins. diam., bears N.33 $\frac{1}{2}$ °W., 280 lks. dist. marked T 36 N R 11 W S 18 B T

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

40.00
80.04

N.89°59'E., on a random line bet. secs. 17 and 20.
Set temp. $\frac{1}{4}$ sec. cor.
Fall 2 lks. W. of the cor. of secs. 16, 17, 20 and 21.

Thence
West, on a true line bet. secs. 17 and 20.
Over rolling land, through scattering timber and undergrowth.

25.00
29.20
40.02

Draw, course NE.
Road, bears NE. and SW.
Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the

Subdivision of T.36 N., R.11 W.

Chains

ground, in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ $\frac{S\ 17}{S\ 20}$
1924

From which,

- A cedar, 12 ins. diam., bears N.17 $\frac{1}{2}$ °E., 217 lks. dist., marked $\frac{1}{4}$ S 17 B T
- A cedar, 18 ins. diam., bears S.0°45'E., 93 lks. dist., marked $\frac{1}{4}$ S 20 B T

Asc. 200 ft. over SE. slope.

67.00

Top of ascent.

80.04

The cor. of secs. 17, 18, 19 and 20 .

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

40.00

S.89°51'W., on a random line bet. secs. 18 and 19.

Set temp. $\frac{1}{4}$ sec. cor.

78.40

Fall 2 lks. S. of the cor. of secs. 13, 18, 19 and 24, on W. bdy. of Tp., hereinbefore described.

Thence

N.89°52'E., on a true line bet. secs. 18 and 19.

Over rolling land, through scattering timber and undergrowth.

Desc. 150 ft. over E. slope.

38.40

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ $\frac{S\ 18}{S\ 19}$
1924

From which,

- A cedar, 10 ins. diam., bears N.1 $\frac{1}{4}$ °E., 548 lks. dist. marked $\frac{1}{4}$ S 18 B T
- A cedar, 10 ins. diam., bears S.54°E., 217 lks. dist. marked $\frac{1}{4}$ S 19 B T
- Cor. stands in draw, course NE.

Asc. 57 ft. over NW. slope.

45.00

Top of ascent. Desc.

78.40

The cor. of secs. 17, 18, 19 and 20.

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

N.0°3'W., bet. secs. 17 and 18.

Over rolling land, through scattering timber and undergrowth.

Desc. 50 ft. over NW. slope.

27.17

Draw, course NE.

33.67

Read, bears NE. and SW.

Asc. 60 ft. to

40.00


Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bed rock, with marked cross (+) stone alongside, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$
S 18 | S 17
1924.

Subdivision of T.36 N.,R.11 W.

Chains
59.36

Draw, course E.
Asc. 67 ft. over S. slope.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in the ground to bed rock, with marked cross (+) stone, alongside, in a mound of stone, for cor. of secs. 7, 8, 17 and 18, marked on brass cap



No trees near.

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

40.00
80.04

East, on a random line bet. secs. 8 and 17.
Set temp. $\frac{1}{4}$ sec. cor.
Fall 7 lks. S. of the cor. of secs. 8, 9, 16 and 17.

Thence
S.89°57'W., on a true line bet. secs. 8 and 17.
Over rolling land, through scattering timber and undergrowth.

12.50
19.50
40.02

Desc. 107 ft. over W. slope to
Read, bears SE. and NW.
Draw, course NE. Asc. 80 ft. over S^w. slope.
Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, with marked cross (+) stone, alongside, supported in a mound of stone, for $\frac{1}{4}$ sec. cor marked on brass cap



80.04

The cor. of secs. 7, 8, 17 and 18.

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

40.00
78.28


S.89°52'W., on a random line bet. secs. 7 and 18.
Set temp. $\frac{1}{4}$ sec. cor.
Fall 7 lks. N. of the cor. of secs. 7, 12, 13, and 18. on W. bdy. of Tp., hereinbefore described.

Thence,
N.89°49'E., on a true line bet. secs. 7 and 18.
Over rolling land, through scattering timber and undergrowth.

Desc. 128 ft. over S^w. slope.

38.28

Set an iron post, 3 ft. long, 1 in. diam., 14 ins, in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap



From which,
A cedar, 5 ins. diam., bears N.38 $\frac{1}{2}$ °W., 179 lks. dist. marked $\frac{1}{4}$ S 7 B T
A cedar, 5 ins. diam., bears S.52 3/4°W., 119 lks. dist., marked $\frac{1}{4}$ S 18 B T

Subdivision of T.36 N., R.11 W.

Chains

40.00

Draw, course NE.
Asc. 90 ft. over NW. slope.

60.00

Top of ascent.

78.28


The cor. of secs. 7, 8, 17 and 18.

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

N.0°3'W., bet. secs. 7 and 8.
Over rolling land, through scattering timber and undergrowth.

40.00

Set an iron post; 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



From which,
A cedar, 6 ins. diam., bears N.78 $\frac{1}{4}$ °E., 324 lks. dist. marked S 8 B T
A cedar, 10 ins. diam., bears S.70 3/4°W., 230 lks. dist., marked $\frac{1}{4}$ S 7 B T

50.00

Asc.
Desc. 83 ft. over NW. slope.

65.41

Draw, course NE. Road, bears NE. and SW.


Asc. 85 ft.

77.00

Desc. 34 ft.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground to bed rock, with marked cross (+) stone alongside, supported in a mound of stone, for cor. of secs. 5, 6, 7 and 8, marked on brass cap



From which,
A cedar, 6 ins. diam., bears N.51 $\frac{1}{4}$ °E., 411 lks. dist. marked T 36 N R 11 W S 5 B T
A cedar, 10 ins. diam., bears N.27 $\frac{1}{4}$ °W., 178 lks. dist. marked T 36 N R 11 W S 6 B T
No other trees near.

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

40.00

N.89°57'E., on a random line bet. secs. 5 and 8.

80.12

Set temp. $\frac{1}{4}$ sec. cor.
Fall 2 lks. N. of the cor. of secs. 4, 5, 8 and 9.

Thence
S.89°58'W., on a true line bet. secs. 5 and 8.
Over rolling land, through scattering timber and undergrowth.

19.00

Wash, 6 lks. wide, 2 ft. deep, course N. Road, bears N. and S. Asc. 125 ft. to

40.06

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap

Subdivision of T.36 N., R.11 W.

Chains	$\frac{1}{4} \begin{array}{r} S 5 \\ \hline S 8 \\ 1924 \end{array}$
67.50	Road, bears N. and S. in wash, course N.
80.12	The cor. of secs. 5, 6, 7 and 8. Land; rolling. Soil; rocky, 4th. rate. Timber; cedar. Undergrowth; sagebrush.
40.00	S.89°49'W., on a random line bet. secs. 6 and 7. Set temp. $\frac{1}{4}$ sec. cor.
78.21	Run 5 lks. S. of the cor. of secs. 1, 6, 7 and 12 on W. bdy. of Tp., hereinbefore described. Thence N.89°51'E., on a true line bet. secs. 6 and 7. Over rolling land, through scattering timber and undergrowth. Asc.
18.50	Road, bears NE. and SW. in draw, course NE.
38.21	Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bed rock, with marked cross (+) stone alongside, supported in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4} \begin{array}{r} S 6 \\ \hline S 7 \\ 1924 \end{array}$
78.21	The cor. of secs. 5, 6, 7 and 8. Land; rolling. Soil; rocky, 4th. rate. Timber; cedar. Undergrowth; sagebrush.
	N.0°3'W., bet. secs. 5 and 6. Over rolling land, through scattering timber and undergrowth.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap
	$\frac{1}{4} \begin{array}{c} S 6 \quad \quad S 5 \\ \hline 1924 \end{array}$
	From which, A cedar, 10 ins. diam., bears S.53°E., 425 lks. dist. marked $\frac{1}{4}$ S 5 B T A cedar, 10 ins. diam., bears N.0°30'W., 708 lks. dist., marked $\frac{1}{4}$ S 6 B T
42.00	Wash, 6 lks. wide, 3 ft. deep, course NE.
54.10	Road, bears E. and W.
55.00	Draw, course E.
83.45	Asc. 50 ft. over gentle S. slope. Intersect the 9th. Standard Parallel North, 20.42 chs. S.89°49'E., of the S.C. of secs. 31 and 32, T.37 N., R.11 W., which is an iron post, 3 ins. diam., 12 ins. above ground, firmly set, properly marked, and witnessed by a mound of stone N. of cor.

Subdivision of T.36 N., R.11 W.

Chains

At point of intersection, set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to bed rock, with marked cross (+) stone alongside, supported in a mound of stone for closing cor. of secs. 5 and 6, marked on brass cap

T37N R11W

S32

S 6 | S 5

T36N R11W

CC

1924

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

Boundaries of T.36 N., R.11 W.

Latitudes, departures and closing errors.

Line designated.	True bearing.	Distance.	Latitudes.		Departures.	
			N.	S.	E.	W.
South Bdy.	S.89°57'W.	478.68		.42		478.68
West Bdy.	North	484.02	484.02			
North Bdy. (9th. Std. Par.)	S.89°49'E.	17.48		.06	17.48	
	East	40.00			40.00	
	S.89°49'E.	40.00		.13	40.00	
	East	40.00			40.00	
	S.89°46'E.	40.00		.16	40.00	
	East	40.00			40.00	
	S.89°48'E.	40.00		.14	40.00	
	East	40.00			40.00	
	S.89°45'E.	40.00		.17	40.00	
	East	40.00			40.00	
S.89°47'E.	40.00		.15	40.00		
East	40.00			40.00		
S.89°46'E.	20.24		.16	20.24		
East Bdy.	South	481.59		481.59		
Convergency					.54	
Totals.			484.02	482.98	478.26	478.68
			482.98			478.26
Error in latitude			1.04			
Error in departure					0.42	

The west half of each mile of the 9th. standard parallel north was retraced for alinement only, in order to place the closing cors. for T.36 N., on line. The new bearings are given in the preceding notes where the closings were made on the 9th. standard.

The continued satisfactory adjustment of the instruments throughout the survey of this township is indicated from field tests as given in Book "H".

GENERAL DESCRIPTION.

The land within the boundaries of T. 36 N., R. 11 W., is mostly rolling. The northeastern portion is level and agricultural in character. Township is covered with scattering cedar and pinyon timber. There are no known springs or running streams within this township. There is a reservoir in sec. 16 and also one in sec. 2, used for stock-watering. The land in the draws could be cultivated but at the present time the land within the township is used for stock grazing. There are several roads passing through the township, the main one of which enters the township in sec. 1, from Wolf Hole, Arizona, and passes out through sec. 36, to Poverty Mountain and Sullivan Dam.

CERTIFICATE OF UNITED STATES ~~TRANSITMAN~~

Transitman

I, Charles E. Hunter, U. S. ~~Surveyor~~, hereby certify upon honor that, in pursuance

of special instructions received from the U. S. Surveyor General, for Group 122, Arizona

bearing date of the 23rd day of April, 1923, I have well, faithfully, and truly

in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instruc-

tions, and the laws of the United States, surveyed all those parts or portions of the

The West Boundary and

Subdivision lines of

Township 36 North, Range 11 West

of the Gila and Salt

River Base and Meridian, in the State of Arizona

and by diagram on page 1 hereof, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of

said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instruc-

tions, and the special written instructions of the U. S. Surveyor General, for Group 122, Arizona

and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place: Phoenix, Arizona

Charles E. Hunter

U. S. ~~Surveyor~~ Transitman.

Date: October 28, 1925

~~APPROVAL~~

~~OFFICE OF THE UNITED STATES SURVEYOR GENERAL~~

~~The foregoing field notes of the survey of~~

executed by

under his special instructions dated _____, 19____, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above-described surveys in _____, has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.

CERTIFICATE OF UNITED STATES SURVEYOR.

44

I, William E. Hiester, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 122, Arizona bearing date of the 23rd. day of April, 19 23, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of _____
The West Boundary and

Subdivision lines of

Township 36 North, Range 11 West

 _____ of the Gila and Salt
River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes ^{and by diagram on page 1 hereof} as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 122, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place: Phoenix Arizona
 Date: Oct 27, 1925

William E. Hiester
 U. S. Surveyor.

APPROVAL.

OFFICE OF THE UNITED STATES SUPERVISOR OF SURVEYS

Denver, Colorado, March 8, 1926.

The foregoing field notes of the survey of _____
The West Boundary and

Subdivision lines of

Township 36 North, Range 11 West of the
Gila and Salt River Base and Meridian in
The State of Arizona, executed by
William E. Hiester, U.S. Surveyor and
Charles E. Hunter, U.S. Transitman

~~examined by~~ _____
 under ~~his~~ special instructions dated April 23, 1923 for Group 122, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Walter J. Brown
 U. S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above described surveys in _____
 _____, has been correctly copied from the original notes on file in this office.