

3697

Book "H"

4-678

Orig

BOOK 3697

FIELD NOTES

OF THE SURVEY OF THE

North boundary, and

Subdivision lines of

TOWNSHIP 1 NORTH, RANGE 8 EAST

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

Dupree R. Averill, U. S. Surveyor

Roger F. Wilson, U. S. Transitman

In the capacity of U. S. Surveyors, under Special Instructions dated October 15, 1923, issued by the United States Surveyor General to govern surveys included in Group No. 124 Arizona, which were approved by the Commissioner of the General Land Office, November 3, 1923, and Assignment Instructions dated January 2, 1924:

Survey commenced Feb. 29, 1924

Survey completed March 16, 1924

3697

3697

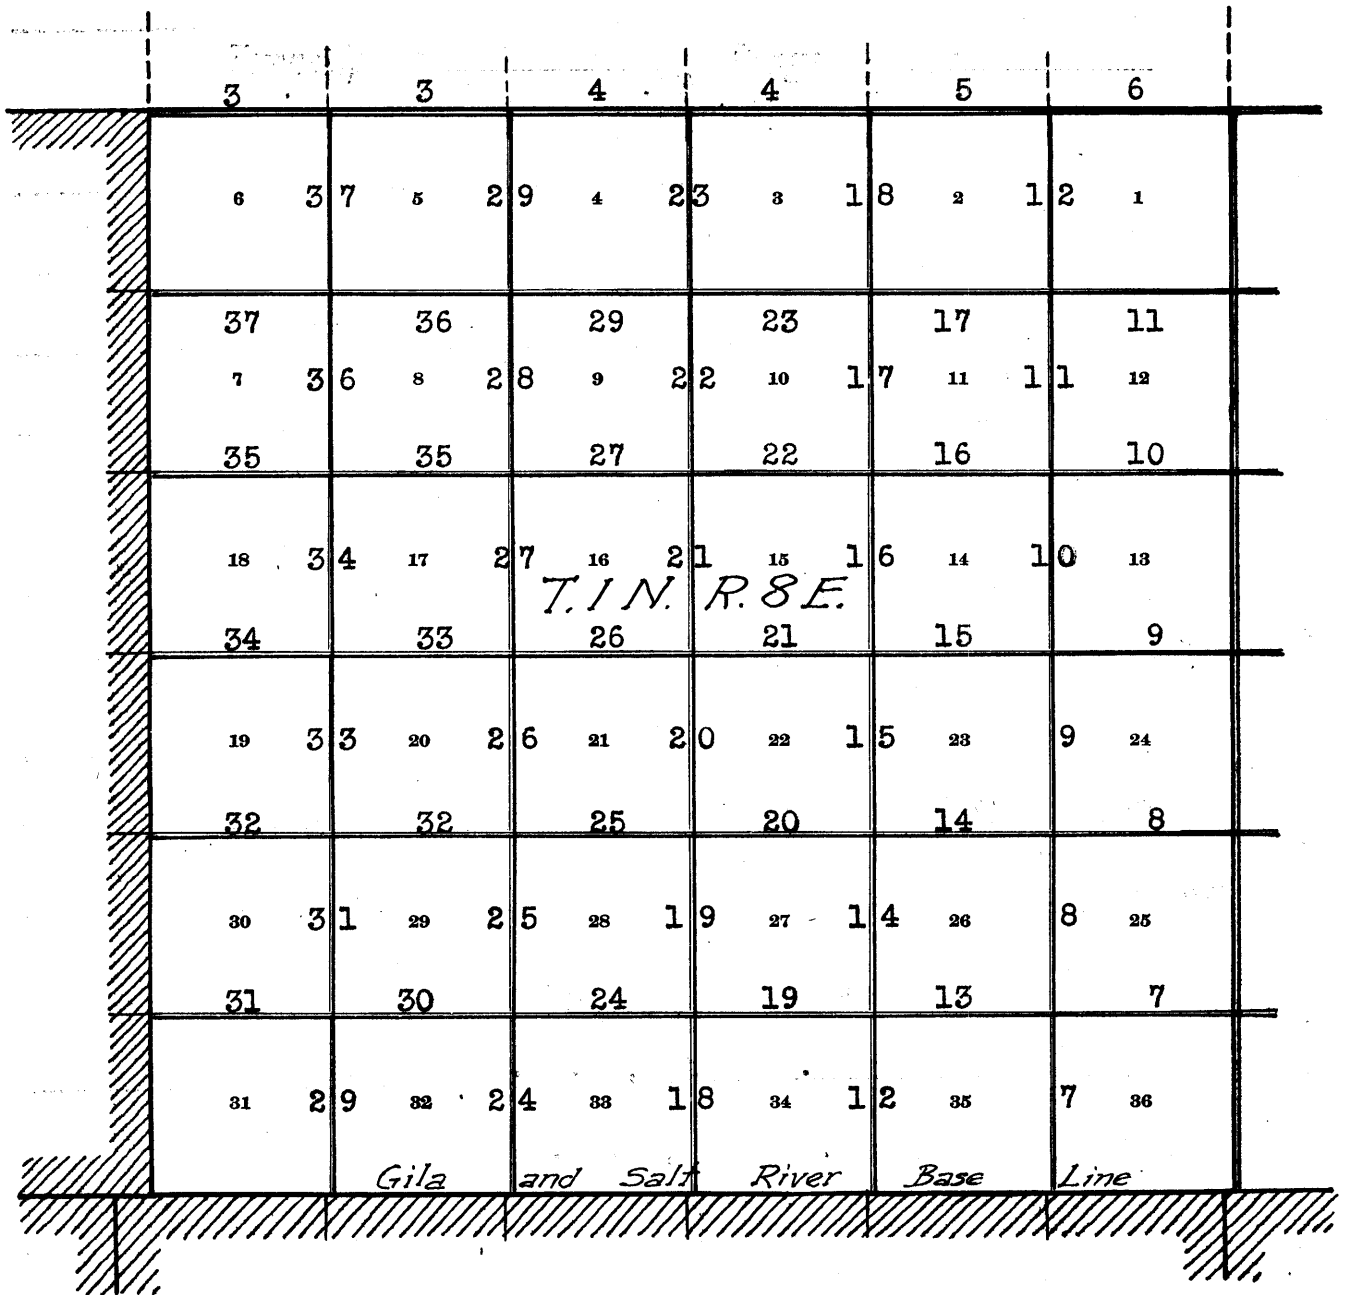
BOOK 3697






1A

Book "H"

Group 124 - - Arizona.

INDEX DIAGRAM.



-  Lines surveyed under this group, notes herein.
-  Lines surveyed under this group see Book "G".
-  Lines of accepted surveys.
-  Unsurveyed lines.
-  Areas surveyed as per accepted plats on file.

BOOK 3697.

Book "H"

Group 124 - - Arizona

Township 1 North, Range 8 East

DATE DIAGRAM.

1924.

3-14	3-14	3-14	3-14	3-14	3-14
6 3-14	5 3-14	4 3-15	3 3-13	2 3-13	1 3-12
7 3-14	8 3-15	9 3-13	10 3-13	11 3-12	12 2-29
18 3-13	17 3-13	16 3-13	15 3-12	14 2-29	13 3-11
19 3-12	20 3-12	21 3-12	22 3-11	23 2-29	24 3-11
30 3-12	29 3-12	28 3-11	27 3-11	26 2-29	25 3-11
31 3-12	32 3-11	33 3-11	34 2-29	35 2-29	36

Gila and Salt River Base Line

- Surveyed on dates shown thereon by Roger F. Wilson, U. S. Transitman.
- Surveyed on dates shown thereon by Dupree R. Averill, U. S. Surveyor.
- Lines of accepted surveys.
- Lines surveyed under this group, see Book "G".

Surveys herein described were executed on dates shown on diagram on page 1 hereof, by Dupree R. Averill, U. S. Surveyor, and Roger F. Wilson, U. S. Transitman, using respectively, Young and Sons light mountain transit No. 8540 and Buff and Buff light mountain transit No. 9221, each equipped with a full vertical circle and Smith solar attachment; unless otherwise specified, all azimuth determinations are accomplished with the solar attachment.

March 9, 1924: We examine the adjustments of the transits and find them correct; then to test the solar apparatus by comparing their indications, resulting from observations made during a.m. and p.m. hours with a meridian established by Roger F. Wilson, with Buff and Buff light mountain transit No. 9221, who proceeds as follows:

At camp near the cor. of secs. 20, 21, 28, and 29, T1N, R8E, G. and S.R. B. and M. Arizona, latitude $33^{\circ}24'N.$, longitude, $111^{\circ}32'W.$, at 8h 20.6m p.m., l.m.t., I observe Polaris at western elongation, making four observations, two each with the telescope in direct and reversed positions and mark the mean point in the line thus determined on a peg driven firmly in the ground, 5 chs. northerly.

Azimuth of Polaris at elongation = $1^{\circ}19'2''$

March 10, 1924: At 7h 30m a.m., l.m.t., I lay off the azimuth of Polaris, $1^{\circ}19'$ to the east and mark the meridian thus determined by a tack in a peg driven firmly in the ground, 5.00 chs. north.

At 8h. 0m a.m., l.m.t., we set off $33^{\circ}24'N.$ on the lat. arcs and $4^{\circ}0'5''S.$ on the decl. arcs and determine a meridian with the solars, which we find to agree with the true meridian.

At apparent noon, with the lat. arcs unchanged, we observe the sun on the meridian; the resulting reading of each decl. arc; is $3^{\circ}57'5''S.$, which agrees with the computed decl. of the sun.

At 4h 0m p.m., l.m.t., with the lat. arcs unchanged, we set off $3^{\circ}53'S.$ on the decl arcs and determine a meridian with each solar, which we find to agree with the true meridian.

As all of the solar observations during the usual hours of solar work come within $1'30''$ of the true meridian we conclude that the adjustments of the instruments are satisfactory.

Unless otherwise specified, all measurements are made with Lufkin steel tapes, 5.00 chs. in length, compared with a Lufkin 1.00 ch. standard steel tape, and found correct. The measurements are made on the slope, vertical angles determined and the slope measurements properly reduced to true horizontal distances.

Survey of the N. bdy. of T.1N., R.8 E.

From the cor. of Tps. 1 and 2 N., Rs. 8 and 9 E., described in book "C".
West on a random line along N. bdy. of T1N, R8E., setting temp. 1/4 sec. and set. cors at intervals of 40.00 chs.; and at 479.70 chs. fall 70 lks. N. of the cor. of Tps. 1 and 2 N., Rs. 7 and 8 E., which is an iron post, 3 ins diam.; 10 ins. above ground; firmly set, marked on brass cap

T2N
R7E R8E
S36 | S31
S 1 | S 6

T1N
1921 and witnessed by

a mound of stone on S.

The falling answers to a correction of 0°5', or 11.6 lks. S. per mile, counting from the NE. cor. of the Tp; therefore I run.

N.89°55'E., on true line bet. secs. 31 and 6.
Over rolling and hilly land, through scattering undergrowth.

- 16.10 Wash, 80 lks. wide, course SW.; asc. 40 ft. over W. slope.
- 21.90 Spur, slopes SW.; desc. 74 ft. over E. slope.
- 27.80 Wash, 40 lks. wide, 10 ft. deep, course S.
- 32.10 Wash, 60 lks. wide, 20 ft. deep, course SW.
- 38.20 Wash, 15 lks. wide, course S.
- 39.70 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for 1/4 sec. cor., marked on brass cap

1/4 S31
S 6
1924

- 53.70 Raise mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.
- 69.70 Wash, 20 lks. wide, 6 ft. deep, course S.10°E.
- 73.70 Wash, 20 lks. wide, 6 ft. deep, course S.10°W.
- 75.70 Wash, 20 lks. wide, 6 ft. deep, course S.10°W.
- 79.70 Wash, 10 lks. wide, course S.
- 79.70 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground for cor. of secs. 5, 6, 31, and 32, marked on brass cap

T2N R8E
S31 | S32
S 6 | S 5

1924

Raise mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling.
Soil, rocky, 4th rate:
Timber, none.
Undergrowth, cacti, palo verde, sage brush, ocotilla, and creosote brush.

- N.89°55'E., on true line bet. secs. 5 and 32.
- 10.70 Over rolling land, through scattering brush.
- 17.50 Wash, 10 lks. wide, course S.20°W.
- 20.80 Wash, 10 lks. wide, 4 ft. deep, course S.
- 30.50 Wash, 15 lks. wide, course S.20°W.
- 31.50 Wash, 15 lks. wide, course S.
- 40.00 Wash, 10 lks. wide, 6 ft. deep, course S.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone 4 ft. base, 1 1/2 ft. high around post, for 1/4 sec. cor., marked on brass cap

Chains.

$$\begin{array}{r} \frac{1}{4} S32 \\ \hline S5 \\ 1924 \end{array}$$

- No bearing trees available.
Asc. W. slope.
43.80 Low spur slopes SE.; desc. over E. slope.
58.00 Wash, 10 lks. wide, 6 ft. deep, course SE.
65.85 Wash, 35 lks. wide, course S.
73.40 Wash, 30 lks. wide, 20 ft. deep, course SW. asc. slightly to cor.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone 4 ft. base 2 ft. high, around post, for cor. of secs. 4, 5, 32, and 33, marked on brass cap.

$$\begin{array}{r} T2N R8E \\ S32 | S33 \\ \hline S5 | S4 \\ T1N \\ 1924 \end{array}$$

- No bearing trees available.
Land, nearly level.
Soil, sandy, 3rd rate.
Timber, none.
Undergrowth, palo verde, cat claw, ocotilla, and cacti.

- N. 89° 55' E., on true line bet. secs. 4 and 33.
Over nearly level land, through dense brush.
7.40 Base of limestone bluff, 100 ft. high, brs North, 3.00 chs. dist.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\begin{array}{r} \frac{1}{4} S33 \\ \hline S4 \\ 1924 \end{array}$$

- Raise mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground for cor. of secs. 3, 4, 33, and 34, marked on brass cap

$$\begin{array}{r} T2N R8E \\ S33 | S34 \\ \hline S4 | S3 \\ T1N \\ 1924 \end{array}$$

- No bearing trees available.
Raise mound of stone, 2 ft. base, 1½ ft. high W. of cor.
Land, nearly level
Soil, sandy, 3rd rate.
Timber, none.
Undergrowth, palo verde, catclaw, ocotilla, and cacti.

- N. 89° 55' E., on true line bet. secs. 3 and 34.
Over rolling mountainous land, through dense brush.
6.00 Wash, 100 lks. wide, course S.; asc. 159 ft. over W. slope.
20.00 Spur, slopes S.; desc. 192 ft. over SE. slope.
32.80 Wash, 20 lks. wide, course S.; asc. 51 ft. over W. slope.
40.00 Set an iron post, 3 ft. long, 1 in. diam., on cross (X) on surface rock, and raise a mound of stone, 4 ft. base, 3 ft. high around post, for $\frac{1}{4}$ sec. cor., marked on brass cap.

Survey of the N. bdy. of T1N, R8E.

Chains.

1/4 S34
S 3
1924

No bearing trees available.
Asc. 186 ft. over E. slope.
51.30 Top of perpendicular bluff, 30 ft. high on ridge, brs N. and S.; desc. 352 ft. over E. slope.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground for cor. of secs. 2, 3, 34, and 35; marked on brass cap

T2N R8E
S34 | S35
S 3 | S 2
T1N
1924

No bearing trees available.
Raise mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling and hilly.
Soil, sandy, 3rd rate.
Timber, none.
Undergrowth, palo verde, ocotilla, cacti, and catclaw.

N. 89° 55' E., on true line bet. secs. 2 and 35.
Over rolling land, through dense brush.
3.50 Wash, 20 lks. wide, course S.
13.20 Road, brs N. and S.
30.00 Asc. 62 ft. over W. slope.
39.50 Low spur, slopes S.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone 2 1/2 ft. base, 2 ft. high around post, for 1/2 sec. cor., marked on brass cap

1/4 S35
S 2
1924

No bearing trees available.
Desc. 84 ft. over E. slope.
55.00 Wash, 30 lks. wide, course S.; asc. 29 ft. over W. slope.
75.00 Low ridge, brs N. and S.; desc. 40 ft. over E. slope.
78.50 Wash, 20 lks. wide, course S.; asc. slightly
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone, 3 ft. base, 2 ft. high, around post, for cor. of secs. 1, 2, 35, and 36, marked on brass cap

T2N R8E
S35 | S36
S 2 | S 1
T1N
1924

No bearing trees available.
Land, rolling.
Soil, sandy, 3rd rate.
Timber, palo verde.
Undergrowth, ocotilla, cacti, and catclaw.

Survey of the N. bdy. of T1N,R8E.

Chains.

	N. 89° 55' E., on true line bet. secs. 1 and 36. Over rolling land, through dense brush.
7.70	Wash, 30 lks. wide, course S.
22.10	Wash, 30 lks. wide, course S.
26.40	Road, brs N. and S.
28.00	Transmission line brs NE. and SW.
31.54	Corner No. 4 of Black Queen, identical with cor. No. 1 of Mother Hubbard, identical with cor. No. 2 of Mammoth No. 3, identical with cor. No. 3 of Tom Thumb, unpatented mining claims in Survey No. 3886 brs. South, 10 lks. distant.
31.70	Wash, 20 lks. wide, course SW.
35.90	Transmission line brs NE. and SW.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S36 $\frac{1}{4}$ S1 1924
	No bearing trees available.
	Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
41.20	Telephone line brs NE. and SW.
50.42	Flag at U.S.L.M. No. 1130 brs S. 36° 34' W. Low hill brs N. and S., 40 ft. high. Cor. No. 1 of the May Day patented mining claim, Survey No. 1568 brs. N. 25 $\frac{1}{2}$ ° E., 6.32 chs. dist.
55.00	Wash, 100 lks. wide, course SW.
65.80	Apache Trail, brs N. and SW.
80.00	The cor. of Tps. 1 and 2 N., Rs. 8 and 9 E., described in book G.
	Land, rolling.
	Soil, sandy, 3rd rate.
	Timber, none.
	Undergrowth, palo verde, ocotilla, cacti, and catclaw.

Survey of the Subdivision of T1N,R8E.

Chains.

The standard cor. of secs. 35 and 36 on the S. bdy of the Tp., is an iron post, 3 ins. in diam., 12 ins. above ground, firmly set, marked on brass cap

SC
T1N R8E
S35|S36

1914. and witnessed by pits; N., E., and W. of cor.

Thence
N.0°01'W., bet. secs. 35 and 36.
Over level land, through dense brush.

- 18.60 State highway, brs NW. to Mesa and SE. to Florence.
- 32.60 Transmission line bet. NW. and SE.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone 2 ft. base, 1½ ft. high around post, for ¼ sec. cor., marked on brass cap

S35|S36

1924

No bearing trees available.

- 48.20 Road, brs E. and W.
- 51.80 Wash, 30 lks. wide, course W.
- 62.10 Wash, 30 lks. wide, course W.

- 75.30 Dim road, brs NE. and SW.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone 2 ft. base, 1 ft. high, around post, for cor. of secs. 25, 26, 35, and 36, marked on brass cap

T1N R8E
S26|S25
S35|S36

1924

No bearing trees available.

Land, level.
Soil, sandy, 3rd rate.
Timber none.
Undergrowth, cacti, ocotilla, and cat claw.

- 40.00 East, on random line bet. secs. 25 and 36.
- Set temp. ¼ sec. cor.
- 80.12 Intersect the E. bdy. of the Tp., 5 lks. N. of the cor. of secs. 25, 30, 31, and 36, described in book "G".

- Thence
N.89°58'W., on true line bet. secs. 25 and 36.
Over level land, through dense brush.
- 3.12 Wash, 20 lks. wide, course SW.
- 12.00 Road, brs N. and S.
- 24.50 Wash, 30 lks. wide, course SW.
- 40.06 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone 3 ft. base, 1½ ft. high around post, for ¼ sec. cor., marked on brass cap.

Chains.

1/4 S25
S36
1924

No bearing trees available.
58.60 Dim road, brs NE. and SW.
77.60 Wash, 20 lks. wide, course SW.
78.00 Dim road, brs NE. and SW.
80.12 The cor. of secs. 25, 26, 35, and 36.

Land, level.
Soil, sandy, 3rd rate.
Timber, none.
Undergrowth, palo verde, ocotilla, cacti, catclaw, and creosote.

N.0°1'W., bet. secs. 25 and 26.
18.60 Over level land, through dense brush.
40.00 Wash, 30 lks. wide, course W.
Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone 2 ft. base, 1 ft. high, around post, for 1/4 sec. cor., marked on brass cap

1/4
S26 | S25
1924

No bearing trees available.
73.40 Wash, 20 lks. wide, course SW.
74.40 Road, brs E. and W.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone, 3 ft. base, 1 ft. high around post, for 1/4 sec. cor., marked on brass cap

T1N R8E
S23 | S24
S26 | S25

1924
No bearing trees available.
Land, level.
Soil, sandy, 3rd rate.
Timber, palo verde.
Undergrowth, ocotilla, cacti, and catclaw.

S.89°58'E., on random line bet. secs. 24 and 25.
40.00 Set temp. 1/4 sec. cor.
80.10 Intersect the E. bdy. of the Tp., 5 lks. N. of the cor. of secs. 19, 24, 25, and 30, described in book "G".

Thence
N.89°56'W., on true line bet. secs. 24 and 25.
Over level land, through dense brush.
23.90 Wash, 20 lks. wide, course S.
40.05 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone 3 ft. base, 1 1/2 ft. high around post, for 1/4 sec. cor., marked on brass cap

1/4 S24
S25
1924

Survey of the Subdivision of T1N, R8E.

Chains.	No bearing trees available
58.80	Wash, 20 lks. wide, course S.
70.10	Dim road, brs N. and S.
80.10	The cor. of secs. 23, 24, 25, and 26.
	Land, level.
	Soil, 3rd rate
	Timber, none.
	Undergrowth, ocotilla, cacti, and cat claw.
<hr/>	
	N.0°1'W., bet. secs. 23 and 24.
	Over level land, through dense brush.
28.30	Wash, 20 lks. wide, course W.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone 3 ft. base, 1½ ft. high, around post, for ¼ sec. cor., marked on brass cap
	¼ S23 S24
	1924
	No bearing trees available.
59.70	Wash, 20 lks. wide, course SW.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground for cor. of secs. 13, 14, 23, and 24, marked on brass cap
	T1N R8E S14 S13 S23 S24
	1924
	Raise md. of stone 2 ft. base 1½ ft. high N. of cor.
	No bearing trees available.
	Land, rolling and level.
	Soil, sandy, 3rd rate.
	Timber, none.
	Undergrowth, cacti, cat claw, and ocotilla.
<hr/>	
	S.89°56'W., on random line bet. secs. 13 and 24.
40.00	Set temp. ¼ sec. cor.
80.08	Intersect the East bdy. of the Tp., 14 lks. S. of the cor. of secs. 13, 18, 19, and 24, described in book "C".
	Thence
	S.89°58'W., on true line bet. secs. 13 and 24.
	Over rolling land, through dense brush.
20.48	Wash, 20 lks. wide, course SW.
40.04	Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone 3 ft. base, 1½ ft. high, around post, for ¼ sec. cor., marked on brass cap
	¼ S13 S24 1924
	No bearing trees available.
44.08	Wash, 15 lks. wide, course S.
66.78	Wash, 20 lks. wide, course S.
80:08	The cor. of secs. 13, 14, 23, and 24.
	Land, rolling and level.
	Soil, sandy, 3rd rate. Timber, none.
	Undergrowth, palo verde, ocotilla, cacti, and catclaw.

Survey of the Subdivision of T1N, R8E.

Chains.		
	N.0°1'W., bet. secs. 13 and 14. Over rolling land, through dense undergrowth.	
.70	Road, brs NE. and SW.	
6.10	Wash, 20 lks. wide, course W.	
13.30	Wash, course W. (20 lks. wide)	
34.70	Wash, 10 lks. wide, course W.	
40.00	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap	
	$\frac{1}{4}$	
	S14 S13	
	1924	
	No bearing trees available.	
	Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.	
54.00	Wash, 50 lks. wide, course W.	
59.70	Wash, 30 lks. wide, course W.	
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, around post, for cor. of secs. 11, 12, 13, and 14, marked on brass cap.	
	T1N R8E S11 S12 S14 S13	
	1924	
	No bearing trees available.	
	Land, rolling.	
	Soil, sandy, 3rd rate.	
	Timber, none.	
	Undergrowth, cacti, ocotilla, and cat claw.	
	<hr/>	
	N.89°58'E., on random line bet. secs. 12 and 13.	
40.00	Set temp. $\frac{1}{4}$ sec. cor.	
80.06	Intersect the cor. of secs. 7, 12, 13, and 18 on the E. bdy. of the Tp., described in book "G".	
	Thence	
	S.89°58'W., on true line bet. secs. 12 and 13.	
	Over rolling land, through dense undergrowth.	
	Desc. 62 ft. over gradual W. slope.	
7.50	Wash, 50 lks. wide, course SW.; desc. 124 ft.	
34.80	Trail, brs N. and S.	
40.00	Cor. No. 1 of Eclips, identical with cor. No. 1 of Eclips No. 3	
	No. 4, identical with Cor. No. 2 of Arpad, identical with Cor. No. 4 of Peaches, unpatented mineral claims brs. N.9°45'W., 2.60 chs. dist. (Survey, 3884)	
40.03	Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone 3 ft. base, $1\frac{1}{2}$ ft. high around post, for $\frac{1}{4}$ sec. cor., marked on brass cap	
	$\frac{1}{4}$ S12 S13 1924	
	No bearing trees available.	
	Over gently rolling land.	
44.40	Mine shaft, 6x6x20 ft., on line.	
45.70	Trail, brs N. and S.	
46.10	Wash, 30 lks. wide, course S.	
49.13	Cor No. 1 Arpad, identical with Cor No. 1 of Peaches; identical with Cor. No. 4 of Black Prince, identical with Cor No. 2 of Black Prince #2, unpatented mineral claims, Survey 3884, brs South; 11 lks. dist.	

Survey of the Subdivision of T1N,R8E.

Chains.

49.15 Low ridge, brs N. and S.
73.98 An iron post, 4 ins. diam., set in concrete, witnessed by a mound of stone 8 ft. base, 5 ft. high on E., brs N.4°W., 2.60 chs. dist.

80.06 The cor. of secs. 11,12,13, and 14.

Land, rolling.
Soil, sandy, 3rd rate.
Timber, none.
Undergrowth, palo verde, cacti, and catclaw.

11.10 N.0°1'W., bet. secs. 11 and 12.
29.50 Over rolling land, through scattering and dense brush.
40.00 Wash, 20 lks. wide, course SW.
Wash, 30 lks. wide, course W.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for 1/4 sec. cor., marked on brass cap

S11|S12

1924

No bearing trees available.
49.90 Raise mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.
Cor. No. 4 of the New Troy Mineral claim, Survey No. 3886, unpatented, brs N.45°E., 4.04 chs. dist.
63.70 Wash, 10 lks. wide, course SW.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground for cor. of secs. 1,2,11, and 12, marked on brass cap

T1N R8E
S 2 | S 1
S11 | S12

1924

No bearing trees available.
Raise mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.
Land, rolling.
Soil, sandy, 3rd rate.
Timber, none.
Undergrowth, cacti, creosote brush, ocotilla, cat claw.

40.00 N.89°58'E., on random line bet. secs. 1 and 12.
80.14 Set temp. 1/4 sec. cor.
Intersect the E. bdy. of the Tp., 16 lks. S. of the cor. of secs. 1,6,7, and 12, described in book "G".

40.07 Thence
S.89°51'W., on true line bet. secs. 1 and 12.
Over rolling land, through scattering brush.
Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone, 2 ft. base, 1 ft. high, around post, for 1/4 sec. cor., marked on brass cap

1/4 S 1
S12

1924

43.14 No bearing trees available.
64.16 Road, brs N. and S.
U.S.L.M. No. 1130, which is a granite stone 10x8x6 ins.

Survey of the Subdivision of TLN, R8E.

Chains.

above ground, firmly set, marked with a cross (X) on top and U.S.L.M. 1130, brs N. $9^{\circ}32'E.$, 41.54 chs. dist., and is also about 1.00 ch. NE. of main shaft of Goldfield mine. Also steel gallow frame at base, brs. S. $15^{\circ}E.$, 30 lks. dist.
From U.S.L.M. No. 1130, Cor. No. 2 of the Old Wasp patented mining claim, brs. S. $17^{\circ}39'E.$, 7.65 chs. dist.

64.20 Low hill, brs N. and S.

80.14 The cor. of secs. 1, 2, 11, and 12.

Land, rolling.

Soil, sandy, 3rd rate.

Timber, none.

Undergrowth, palo verde, ocotilla, cat claw, cacti, and creosote brush.

North on random line bet. secs. 1 and 2.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.26 Intersect the N. bdy. of the Tp., 7 lks. S. $89^{\circ}55'W.$, of the cor. of secs. 1, 2, 35, and 36, hereinbefore described.

Thence

S. $0^{\circ}3'W.$, on true line bet. secs. 1 and 2.

Over rolling land, through dense brush.

2.26 Wash, 30 lks. wide, course SE.; asc. NE. slope slightly

11.36 Low ridge, brs NW. and SE.; desc. NW. slope slightly.

30.56 Transmission line brs NE. and SW.

35.26 Telephone line brs NE. and SW.

38.05 Wash, 30 lks. wide, course S. $10^{\circ}W.$

40.26 Set an iron post, $\frac{3}{4}$ ft. long, 1 in. diam., 8 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone 3 ft. base, 2 ft. high, around post, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$

S 2 | S 1

1924

No bearing trees available.

From this cor., U.S.L.M., No. 1130, brs N. $82^{\circ}28'E.$, 22.82 chs. dist.

64.06 Road, brs NE. and SW.

Wash, 30 lks. wide, course SW.

69.26 Wash, 30 lks. wide, course SW.

70.06 Apache Trail, brs NE. to Roosevelt and SW. to Mesa.

74.00 Old prospect hole, brs West, 30 lks. dist.

80.26 The cor. of secs. 1, 2, 35, and 36.

Land, nearly level.

Soil, sandy, 3rd rate.

Timber, none.

Undergrowth, creosote, ocotilla, palo verde, cacti, and catclaw.

From the standard cor. of secs. 34 and 35 on the S. bdy. of the Tp., which is an iron post, 3 ins. diam., 9 ins. above ground, firmly set, marked on brass cap

S C

TLN R8E

S34 | S35

Survey of the Subdivision of T1N, R8E.

Chains.	and witnessed by pits, N, E. and W. of post.	
	Thence	
	N. 0° 1' W., bet. secs. 34 and 35.	
	Over level land, through scattering brush	
40.00	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap	
	$\frac{1}{4}$	
	S34 S35	
	1924	
	No bearing trees available.	
46.70	Raise mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.	
58.60	Road, brs E. and W.	
61.60	Wash, 10 lks. wide, course SW.	
74.80	Wash, 10 lks. wide, course SW.	
80.00	Bankhead Highway, brs N. 54° 50' W. to Mesa and S. 54° 50' E. to Tucson.	
	Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone, 5 ft. base, 2 ft. high, around post, for cor. of secs. 26, 27, 34, and 35, marked on brass cap	
	T1N R8E	
	S27 S26	
	S34 S35	
	1924	
	No bearing trees available.	
	Land, level.	
	Soil, rocky, and sandy, 3rd rate.	
	Timber, none.	
	Undergrowth, creosote, cacti, and catclaw.	

40.00	East on random line bet. secs. 26 and 35.	
79.96	Set temp. $\frac{1}{4}$ sec. cor.	
	Intersect to the N. and S. line, 16 lks. N. of the cor. of secs. 25, 26, 35, and 36.	
	Thence	
	N. 89° 53' W., on true line bet. secs. 26 and 35.	
	Over level land, through scattering brush	
14.75	Wash, 60 lks. wide, course S.	
16.65	Road, brs NW. and SE.	
27.80	Telegraph line, brs NW. and SE.	
28.00	Road, brs NW. and SE.	
36.85	Wash, 15 lks. wide, course S.	
39.98	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap	
	$\frac{1}{4}$ S26	
	S35	
	1924	
	No bearing trees available.	
48.15	Raise mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.	
59.75	Wash, 5 lks. wide, course SW.	
73.35	Wash, 10 lks. wide, course S.	
79.96	Wash, 10 lks. wide, course S. 10° W.	
	The cor. of secs. 26, 27, 34, and 35.	
	Land, level.	
	Soil, sandy and rocky, 3rd rate.	
	Timber, none.	
	Undergrowth, catclaw, creosote brush, cacti and sage brush.	

Survey of the Subdivision of T1N,R8E.

Chains.

	N.0°1'W., bet. secs., 26 and 27.	
	Over level land, through scattering brush	
10.65	Dim road, brs NW. and SE.	
29.20	Wash, 10 lks. wide, course W.	
30.40	Wash, 5 lks. wide, course SW.	
33.00	Same wash, course SE.	
34.80	Same wash, 5 lks. wide, course SW.	
40.00	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap	
	$\frac{1}{4}$	
	S27 S26	
	1924	
	No bearing trees available.	
	Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.	
43.50	Road, brs N.20°E., and S.20°W.	
48.00	Wash, 8 lks. wide, course SW.	
65.50	Wash, 8 lks. wide, course SW.	
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone, 4 ft. base, $1\frac{1}{2}$ ft. high, around post, for cor. of secs. 22, 23, 26, and 27, marked on brass cap	
	T1N R8E	
	S22 S23	
	S27 S26	
	1924	
	No bearing trees available.	
	Land, level.	
	Soil, sandy, and rocky, 3rd rate.	
	Timber, none.	
	Undergrowth, creosote brush, cacti, and sage brush.	
	<hr/>	
	S.89°53'E., on random line bet. secs. 23 and 26.	
40.00	Set temp. $\frac{1}{4}$ sec. cor.	
79.88	Intersect the N. and S. line, at the cor. of secs. 23, 24, 25, and 26.	
	Thence	
	N.89°53'W., on true line bet. secs. 23 and 26.	
	Over level land, through scattering undergrowth.	
22.20	Wash, 10 lks. wide, course S.	
27.65	Dim road, brs N. and S.	
30.10	Wash, 30 lks. wide, course S.	
38.30	Dim road, brs NW. and S.	
39.94	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap	
	$\frac{1}{4}$ S23	
	S26	
	1924	
	No bearing trees available.	
	Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.	
42.50	Road, brs N.20°W. and S.20°E.	
42.70	Telegraph line, brs N.20°W. and S.20°E.	
52.15	Dim road, brs N. and S.	
64.80	Wash, 10 lks. wide, course S.	
67.80	Dim road, brs N. and S.	
71.70	Dim road, brs N. and S.	
75.20	Wash, 8 lks. wide, course S.	
79.88	The cor. of secs. 22, 23, 26, and 27.	
	Land, level.	
	Soil, sandy and rocky, 3rd rate. Timber, none.	
	Undergrowth, creosote, cacti, sage brush, and catclaw.	

Survey of the Subdivision of T1N,R8E.

Chains.

1.10 N.0°1'W., bet. secs. 22 and 23.
 40.00 Over rolling and level land, through scattering brush.
 Wash, 10 lks. wide, course SW.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 S22|S23

1924
 No bearing trees available.
 45.10 Raise mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
 Wash, 20 lks. wide, course W.
 52.30 Dim road, brs N.10°E. and S.10°W.
 77.40 Wash, 10 lks. wide, course S.10°E.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in
 the ground to bed rock; deposit a stone marked with a
 cross (X) at base of post, and raise a mound of stone,
 4 ft. base, 2 ft. high, around post, for cor. of secs.
 14,15,22, and 23, marked on brass cap

T1N R8E
 S15|S14
 S22|S23

1924
 No bearing trees available.
 Land, level and rolling.
 Soil, sandy rocky, 3rd rate.
 Timber, none.
 Undergrowth, creosote brush, sage brush, and cacti.

40.00 S.89°53'E. on random line bet. secs. 14 and 23.
 79.90 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect the N. and S. line, 2 lks. S. of the cor. of
 secs. 13,14,23, and 24.

Thence
 2.70 N.89°54'W. on true line bet. secs. 14 and 23.
 10.80 Over level land, through scattering brush.
 16.90 Road, brs NE. and S.
 36.70 Wash, 10 lks. wide, course SW.
 39.95 Wash, 60 lks. wide, course S.
 Wash, 30 lks. wide, course S.
 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in
 the ground to bed rock, deposit a stone marked with a
 cross (X) at base of post, and raise a mound of stone,
 4 ft. base, 2 ft. high around post; for $\frac{1}{4}$ sec. cor.;
 marked on brass cap

$\frac{1}{4}$ S14
 S23

1924
 No bearing trees available.
 50.05 Transmission line, brs N.5°15'W. and S.5°15'E.
 56.35 Road, brs N. and S.
 59.90 Wash, 10 lks. wide, course S.
 65.10 Wash, 10 lks. wide, course SE.
 79.10 Wash, 10 lks. wide, course S.
 79.90 The cor. of secs. 14,15,22, and 23.

Land, level.
 Soil, sandy rocky, 3rd rate.
 Timber, none.
 Undergrowth, creosote, cacti, sage brush, and catclaw.

Survey of the Subdivision of T1N, R8E.

Chains.

	N.0°1'W., bet. secs. 14 and 15. Over rolling land, through dense brush.	
29.50	Road, brs NE. and SW.	
40.00	Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone, 3 ft. base, 2 ft. high, around post, for $\frac{1}{4}$ sec. cor., marked on brass cap	
	$\frac{1}{4}$	
	S15 S14	
	1924	
	No bearing trees available.	
41.90	Wash, 20 lks. wide, course SW.	
59.50	Dim road, brs NE. and SW.	
69.40	Road, brs N.70°E. and S.70°W.	
75.50	Wash, 20 lks. wide, course S.20°W.	
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground for cor. of secs. 10, 11, 14, and 15, marked on brass cap.	
	T1N R8E	
	S10 S11	
	S15 S14	
	1924	
	from which	
	An ironwood, 12 ins. diam., brs N.71 $\frac{1}{2}$ °W., 2.14 chs. dist., marked T1N R8E S10 BT.	
	No other bearing trees available.	
	Raise mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.	
	Land, level.	
	Soil, sandy, 2nd rate.	
	Timber, ironwood,	
	Undergrowth, palo verde, cat claw, ocotilla and cacti.	

40.00	S.89°54'E., on random line bet. secs. 11 and 14	
79.90	Set temp. $\frac{1}{4}$ sec. cor. Intersect the N. and S. line, 2 lks. N. of the cor. of secs. 11, 12, 13, and 14.	
	Thence	
	N.89°53'W., on true line bet. secs. 11 and 14.	
	Over level land, through dense undergrowth.	
3.20	Wash, 50 lks. wide, course S.	
9.40	Wash, 20 lks. wide, course S.	
30.70	Road, brs N. and S.	
31.20	Wash, 20 lks. wide, course S.	
38.40	Low hill, brs N. and S.	
39.95	Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, to bed rock, and deposit a stone marked with a cross (X) at base of post, and raise a mound of stone, 3 ft. base, 2 ft. high, around post, for $\frac{1}{4}$ sec. cor., marked on brass cap	
	$\frac{1}{4}$ S11	
	S14	
	1924	
	No bearing trees available.	
57.40	Transmission line, brs N. and S.	
58.30	Road, brs N. and S.	
79.20	Wash, 20 lks. wide, course S.	
79.90	The cor. of secs. 10, 11, 14, and 15. Land, rolling. Soil, sandy, 3rd rate. Timber, none. Undergrowth, palo verde, cat claw, ocotilla, and cacti.	

Survey of the Subdivision of T1N,R8E.

Chains.

N.0°1'W., bet. secs. 10 and 11.
 Over level land, through dense brush.
 2.50' Wash, 30 lks. wide, course S.60°W.
 28.30 Wash, 50 lks. wide, course SW.
 37.80 Road, brs NE. and SW.
 38.30 Apache Trail, brs NE. to Roosevelt and SW. to Mesa.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 S10|S11

1924

No bearing trees available.
 Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Road, brs E. and W.
 53.50 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in
 80.00 the ground, for cor. of secs. 2,3,10, and 11, marked on
 brass cap

T1N R8E
 S 3|S 2
 S10|S11

1924

No bearing trees available.
 Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Land, level.
 Soil, sandy, 3rd rate.
 Timber, none.
 Undergrowth, palo verde, ocotilla, cacti, and cat claw.

S.89°53'E., on random line bet. secs. 2 and 11.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.84 Intersect the N. and S. line, 16 lks. S. of the cor. of
 secs. 1,2,11, and 12.
 Thence
 West, on true line bet. secs. 2 and 11.
 Over rolling land, through dense brush.
 12.15 Apache Trail, brs NE. to Roosevelt and SW. to Mesa.
 28.85 Wash, 40 lks. wide, course S.
 29.35 Wire fence, brs N. and S.
 39.92 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
 the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 2
 S11
 1924

No bearing trees available
 Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 Road, brs N. and S.
 46.95 Wire fence, brs N. and S.
 52.00 Wash, 20 lks. wide, course S.
 53.35 Road, brs N. and S.
 60.85 Transmission line brs N. and S.
 64.85 The cor. of secs. 2,3,10, and 11.
 79.84

Land, level.
 Soil, sandy, 3rd rate.
 Timber, none.
 Undergrowth, palo verde, ocotilla, cacti, catclaw, and
 ocotilla.

Survey of the Subdivision of T1N, R8E.

Chains.

40.00 N.0°3'E., on random line bet. secs. 2 and 3
Set temp $\frac{1}{4}$ sec. cor.
80.12 Intersect the N. bdy. of the Tp., 14 lks. N.89°55'E.,
of the cor. of secs. 2,3,34, and 35, hereinbefore des-
cribed.

Thence
S.0°3'E., on true line bet. secs. 2 and 3
Over rolling land, through scattering brush.
18.30 Road, brs NE. and SW. course SW.
22.40 Mine, brs East, about 3.00 chs. dist.
26.90 Shaft on line, 30 ft. deep.
27.70 Wash, 20 lks. wide, course SW.
40.12 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

S 3 | S 2

1924

No bearing trees available.
Raise mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
73.12 Wash, 20 lks. wide, course S.10°E.
77.12 Wash 12 lks. wide, course SW.
78.22 Transmission line, brs N.76°50'E., and S.76°50'W.
80.12 The cor. of secs. 2,3,10, and 11.

Land, rolling.
Soil, sandy, 2nd rate.
Timber, none.
Undergrowth, creosote, cacti, and sage brush.

From the standard cor. of secs. 33 and 34, on the S. bdy.
of the Tp., which is an iron post, 3 ins. diam., 9 ins.
above ground, firmly set, marked on brass cap

S C
T1N R8E
S33 | S34

1914. And witnessed by pits,
W., N., and E. of post.

Thence
N.0°2'W., bet. secs. 33 and 34.
Over level land, through scattering brush.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

S33 | S34

1924

68.00 Old road, brs NW. and SE.
73.00 Same old road, brs NE. and SW.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in
the ground to bed rock, deposit a stone marked with a
cross, at base of post, for cor. of secs. 27,28,33, and 34,
marked on brass cap

T1N R8E
S28 | S27
S33 | S34

1924

No bearing trees available.
Dig pits, 18x18x12 ins., NE, SE, SW, NW. of post, 3 ft. dist.

Survey of the Subdivision of T1N,R8E.

Chains.

Land, level
Soil, sandy, 3rd rate.
Timber, none.
Undergrowth, cacti, creosote brush, and sage brush.

40.00 East, on random line bet. secs. 27 and 34.
Set temp. $\frac{1}{4}$ sec. cor.
80.02 Intersect the N. and S. line, at the cor. of secs. 26,
27, 34, and 35.

Thence,
West, on true line bet. secs. 27 and 34.
Over level land, through scattering brush and timber.
7.40 State Highway, brs NW. to Mesa and SE. to Tucson.
12.80 Wash, 20 lks. wide, course SW.
27.00 Wash, 10 lks. wide, course SW.
39.60 Old road, brs NE. and SW.
40.01 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S27
S34
1924

No bearing trees available.
Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
57.80 Wash, 10 lks. wide, course S.10°W.
66.70 Wash, 5 lks. wide, course S.10°E.
80.02 The cor. of secs. 27, 28, 33, and 34.

Land, level.
Soil, sandy, rocky, 3rd rate.
Timber, palo verde, and ironwood.
Undergrowth, catclaw, cacti, creosote brush, and sage
brush.

N.0°2'W., bet. secs. 27 and 28.
Over level land, through scattering brush.
19.80 Wash, 5 lks. wide, course W.
24.60 Wash, 5 lks. wide, course SW.
32.10 Dim road, brs NE. and SW.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S28|S27

1924

No bearing trees available.
Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
51.10 State Highway, brs NW. to Mesa and SE. to Tucson.
62.70 Wash, 81 lks. wide, course W.
66.50 Wash, 81 lks. wide, course SW.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in
the ground, for cor. of secs. 21, 22, 27, and 28, marked
on brass cap

T1N R8E
S21|S22
S28|S27

1924

No bearing trees available.
Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, level.
Soil, sandy, 2nd and 3rd rate. Timber, none.
Undergrowth, creosote brush, cacti, and sage brush

Chains.

40.00 East, on random line bet. secs. 22 and 27.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.10 Intersect the N. and S. line, 7 lks. N. of the cor. of
 secs. 22, 23, 26, and 27.

Thence

N. $89^{\circ}57'W.$, on true line bet. secs. 22 and 27.

Over level land, through scattering undergrowth and timber.

10.40 Wash, 5 lks. wide, course SW.
 15.40 Wash, 5 lks. wide, course SW.
 27.20 Wash, 5 lks. wide, course SW.
 40.05 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
 the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S22

S27

1924

No bearing trees available.

Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

41.30 Dim road, brs NE. and SW..
 43.20 Wash, 10 lks. wide, course S.
 48.40 Wash, 20 lks. wide, course SW.
 55.50 Wash, 10 lks. wide, course S.
 65.50 Wash, 10 lks. wide, course SW.
 74.30 Dim road, brs NE. and SW.
 80.10 The cor. of secs. 21, 22, 27, and 28.

Land, level.

Soil, sandy, 3rd rate.

Timber, palo verde, and ironwood.

Undergrowth, creosote brush, cacti, and sage brush.

N. $0^{\circ}2'W.$, bet. secs. 21 and 22.

Over level land, through dense brush, and scattering
 timber.

25.00 Wash, 30 lks. wide, course SW.
 32.00 Road, brs NE. and SW.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$

S21 | S22

1924

No bearing trees available.

Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

66.30 Road, brs NE. and SW.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in
 the ground to bed rock, deposit a stone marked with a
 cross (X) at base of post, and raise a mound of stone
 3 ft. base, 2 ft. high, around post, for cor. of secs.
 15, 16, 21, and 22., marked on brass cap

T1N.R8E

S16 | S15

S21 | S22

1924

No bearing trees available

Land, level

Soil, sandy, 3rd rate.

Timber, ironwood.

Undergrowth, palo verde, catclaw, and cacti.

Survey of the Subdivision of T1N, R8E.

Chains.

40.00 S. 89° 57' E.; on random line bet. secs. 15 and 22.
 Set temp. 1/4 sec. cor.
 80.18 Intersect the N. and S. line, 19 lks. S. of the cor. of
 secs. 14, 15, 22, and 23.

Thence
 S. 89° 55' W., on true line bet. secs. 15 and 22.
 Over level land, through scattering timber and dense
 brush.

.88 Wash, 10 lks. wide, course S.
 4.00 Road, brs N. and S.
 20.48 Wash, 20 lks. wide, course S.
 36.18 Wash, 20 lks. wide, course S.
 40.09 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground for 1/4 sec. cor., marked on brass cap

1/4 S15
 S22

1924

No bearing trees available.

43.88 Raise mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.
 53.38 Road, brs NE. and SW.
 72.08 Wash, 20 lks. wide, course S.
 80.18 Road, brs NE. and SW.
 The cor. of secs. 15, 16, 21, and 22.

Land, level.
 Soil, sandy, 3rd rate.
 Timber, ironwood.
 Undergrowth, palo verde, catclaw, ocotilla, and cacti.

N. 0° 2' W., bet. secs. 15 and 16.
 Over nearly level land, through scattering timber and
 dense brush.

22.70 Road, brs N. 30° E. and S. 30° W.
 28.10 Wash, 20 lks. wide, course W.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in
 the ground to bed rock, deposit a stone marked with a
 (X) at base of post, and raise a mound of stone, 3 ft.
 base, 2 ft. high, around post, for 1/4 sec. cor., marked
 on brass cap

1/4

S16 | S15

1924

No bearing trees available.

50.20 Apache Trail, brs N. 60° E. to Roosevelt and S. 60° W. to
 Mesa.

57.70 Old road, brs NE. and SW.
 64.80 Wash, 30 lks. wide, course W.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in
 the ground for cor. of secs. 9, 10, 15, and 16, marked
 on brass cap

T1N R8E
 S 9 | S10
 S16 | S15

1924

No bearing trees available.
 Raise mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, level.
 Soil, sandy, 3rd rate.
 Timber, ironwood.
 Undergrowth, palo verde, ocotilla, cacti, and catclaw.

Survey of the Subdivision of T1N, R8E.

Chains.

40.00	N. 89° 55' E., on random line bet. secs. 10 and 15	
80.14	Set temp. $\frac{1}{4}$ sec. cor. Intersect the N. and S. line, at the cor. of secs. 10, 11, 14, and 15.	
	Thence	
	S. 89° 55' W., on true line bet. secs. 10 and 15.	
	Over level land, through dense brush.	
2.14	Wash, 30 lks. wide, course S.	
12.44	Wash, 20 lks. wide, course S. 20° W.	
21.34	Road, brs NE. and SW.	
40.07	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap	
	$\frac{1}{4}$ S10 S15 1924	
	No bearing trees available.	
45.34	Raise mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.	
80.14	Apache Trail, brs NE. to Roosevelt and SW. to Mesa The cor. of secs. 9, 10, 15, and 16.	
	Land, level.	
	Soil, sandy, 3rd rate.	
	Timber, none.	
	Undergrowth, palo verde, ocotilla, cat claw, and cacti	
	<hr/>	
	N. 0° 2' W., bet. secs. 9 and 10	
	Over level land, through scattering timber and undergrowth	
3.90	Wash, 8 lks. wide, course SW.	
13.00	Wash, 10 lks. wide, course SW.	
24.50	Dim road, brs NE. and SW.	
31.50	Wash, 10 lks. wide, course SW.	
36.60	Wash, 5 lks. wide, course S. 20° W.	
39.10	Highway, brs N. 69 $\frac{1}{2}$ ° E. and S. 69 $\frac{1}{2}$ ° W	
40.00	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap	
	$\frac{1}{4}$ S 9 S10 1924	
	No bearing trees available.	
	Raise mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.	
49.40	Wash, 10 lks. wide, course SW.	
63.10	Telephone line, brs N. 80° E. and S. 80° W.	
63.70	Wash, 20 lks. wide, course SW.	
66.40	Road, brs E. and W.	
66.50	Transmission line, brs N. 79 $\frac{3}{4}$ ° E., and S. 79 $\frac{3}{4}$ ° W.	
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground for cor. of secs. 3, 4, 9, and 10, marked on brass cap.	
	T1N R8E S 4 S 3 S 9 S10 1924	
	No bearing trees available.	
	Land, level.	
	Soil, sandy, 1st rate.	
	Timber, palo verde and ironwood.	
	Undergrowth, creostoe brush, sage brush, and cacti.	

Survey of the Subdivision of T1N, R8E.

Chains.

N. 89° 55' E., on random line bet. secs. 3 and 10.
40.00 Set temp. 1/4 sec. cor.
80.00 Intersect the N. and S. line, 12 lks. N. of the cor. of
secs. 2, 3, 10, and 11.

Thence

West, on true line bet. secs. 3 and 10
Over level land, through scattering brush and timber.
2.80 Wash, 20 lks. wide, course SW.
17.90 Transmission line, brs N. 76° 50' E. and S. 76° 50' W.
18.80 Road, brs N. 76° 50' E. and S. 76° 50' W.
22.90 Wash, 20 lks. wide, 5 ft. deep, course S.
34.80 Wash, 10 lks. wide, 5 ft. deep, course SW.
37.90 Road, brs N. 10° E. and S. 10° W.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
the ground for 1/4 sec. cor., marked on brass cap

1/4 S 3
S 10
1924

No bearing trees available.

Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
58.10 Wash, 20 lks. wide, course SW.
70.90 Wash, 10 lks. wide, course SW.
76.00 Wash, 10 lks. wide, course SW.
80.00 The cor. of secs. 3, 4, 9, and 10.

Land, level.

Soil, sandy, 2nd rate.

Timber, palo verde and ironwood.

Undergrowth, creosote brush, cacti, and sage brush.

N. 0° 4' W., on random line bet. secs. 3 and 4.
40.00 Set temp. 1/4 sec. cor.
80.14 Intersect the N. bdy. of the Tp., 2 lks. S. 89° 55' W. of
the cor. of secs. 3, 4, 33, and 34, hereinbefore described.

Thence

S. 0° 3' E., on true line bet. secs. 3 and 4.
Over nearly level land, through dense brush and scatter-
ing timber.
26.64 Dim road, brs E. and W.
29.84 Wash, 20 lks. wide, course SW.
40.14 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
the ground for 1/4 sec. cor.; marked on brass cap

S 4 | S 3
1924

from which

An ironwood, 14 ins. diam. brs N. 50 1/2° E., 1.20 chs. dist.,
marked 1/4 S 3 BT.

No other tree available.

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

75.14 Wash, 30 lks. wide, course S. 10° W.

80.14 The cor. of secs. 3, 4, 9, and 10.

Land, nearly level.

Soil, sandy, 3rd rate.

Timber, ironwood,

Undergrowth, palo verde, ocotilla, and cacti.

Survey of the Subdivision of T1N, R8E.

Chains.

From the standard cor. of secs. 32 and 33 on the S. bdy. of the Tp., which is an iron post, 3 ins in diam., 9 ins. above ground, firmly set, marked on brass cap

S C
T1N R8E
S32|S33

1914 and witnessed by pits, N., E., and W. of post,

Thence

N. 0° 2' W., bet. secs. 32 and 33.

40.00 Over level land, through scattering brush and timber. Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

 $\frac{1}{4}$

S32|S33

1924

No bearing trees available.

80.00 Raise mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 28, 29, 32, and 33, marked on brass cap

T1N R8E
S29|S28
S32|S33

1924

No bearing trees available.

Dig pits, 18x18x12 ins., NE., SE., SW., and NW., of post, 3 ft. dist.

Land, level.

Soil, sandy, 2nd and 3rd rate.

Timber, palo verde and ironwood.

Undergrowth, creosote, cacti, and sage brush.

40.00 East, on random line bet. secs. 28 and 33. Set temp. $\frac{1}{4}$ sec. cor.

80.06 Intersect the N. and S. line, 2 lks. S. of the cor. of secs. 27, 28, 33, and 34.

Thence

S. 89° 59' W., on true line bet. secs. 28 and 33.

Over level land, through scattering brush and timber.

21.06 Road, brs N. and S.

34.76 Wash, 5 lks. wide, course S.

40.03 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

 $\frac{1}{4}$ S28S33

1924

No bearing trees available.

80.06 Raise mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor. The cor. of secs. 28, 29, 32, and 33.

Land, level.

Soil, sandy, 3rd rate.

Timber, palo verde and ironwood.

Undergrowth, cacti, creosote, and sage brush.

Survey of the Subdivision of T1N, R8E.

Chains.	<p>N.0°2'W., bet. secs. 28 and 29. Over level land, through scattering timber and dense brush Wash, 10 lks. wide, course SW. Set an iron post, $\frac{3}{4}$ ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap</p> <p style="text-align: center;">$\frac{1}{4}$</p> <p style="text-align: center;">S29 S28</p> <p style="text-align: center;">1924</p> <p>from which An ironwood, 4 ins. diam., brs S.81$\frac{1}{2}$°W., dist marked $\frac{1}{4}$ S29 BT. No other tree available. Dig pits, 18x18x12 ins. N. and S. of post, 3 ft. dist. Drain, course W. Road, brs E. and W. Wire fence, brs E. and W. Wash, 20 lks. wide, course W. Frame house, 10x10x10 ft., on line. Wire fence, brs E. and W. Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 20, 21, 28, and 29, marked on brass cap</p> <p style="text-align: center;">T1N R8E S20 S21 S29 S28</p> <p style="text-align: center;">1924</p> <p>from which An ironwood, 14 ins. diam., brs S.67$\frac{1}{2}$°E., 2.94 chs. dist., marked T1N R8E S28 BT. An ironwood, 10 ins. diam., brs N.44$\frac{1}{2}$°E., 1.62 chs. dist., marked T1N R8E S21 BT. No other bearing trees available. Raise mound of stone, 2 ft. base, 1$\frac{1}{2}$ ft. high, W. of cor.</p> <p>Land, level. Soil, sandy, 2nd rate. Timber, ironwood. Undergrowth, palo verde, creosote brush, cacti, and catclaw.</p> <hr/> <p>N.89°59'E., on random line bet. secs. 21 and 28. Set temp. $\frac{1}{4}$ sec. cor. Intersect the N. and S. line, 12 lks. S. of the cor. of secs. 21, 22, 27, and 28.</p> <p>Thence S.89°54'W., on true line bet. secs. 21 and 28. Over level land, through scattering brush and timber. Wash, 20 lks. wide, course SW. Wire fence, brs NW. and SE. Fence, brs N. and S. Road, brs N.10°E. and S.10°W. Well, brs S.16$\frac{1}{2}$°W. Store in house, brs S.17$\frac{1}{2}$°W. Dim road, brs N. and S. Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap</p> <p style="text-align: center;">$\frac{1}{4}$ S21 S28</p> <p style="text-align: center;">1924</p> <p>No bearing trees available. Raise mound of stone, 2 ft. base, 1$\frac{1}{2}$ ft. high, N. of cor.</p>
38.60	
40.00	
43.80	
46.00	
59.40	
75.80	
77.30	
78.00	
80.00	
40.00	
80.06	
5.06	
8.00	
13.16	
15.56	
20.06	
29.00	
40.03	

Survey of the Subdivision of T1N, R8E.

Chains.

41.06 State Highway, brs NW. to Mesa and SE to Tucson.
 69.86 Wash, 10 lks. wide; course SW.
 75.36 Wash, 10 lks. wide, course SW.
 77.16 Dim road, brs NE. and SW.
 80.06 The cor. of secs. 20, 21, 28, and 29.

Land, level.
 Soil, sandy, 1st rate.
 Timber, palo verde, and ironwood.
 Undergrowth, creosote, cacti, and sage brush.

N.0°2'W., bet. secs. 20 and 21.

Over rolling and level land, through scattering timber and dense brush.

1.20 Wash, 10 lks. wide, course SW.
 20.70 NW. cor. of Apache Junction Inn, brs N.46°W.
 21.70 State Highway; brs N.70°W to Mesa and S.70°E. to Tucson.
 40.00 NW. cor. of Apache Junction Inn, brs N.86½°W.
 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground; for ¼ sec. cor.; marked on brass cap

¼
 S20|S21

1924

from which

An ironwood, 12 ins. diam., brs S.15°W., 3.30 chs. dist., marked ¼ S20 BT.

No other bearing trees available.

Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.

43.80 Wash, 20 lks. wide, course SW.

61.90 Apache Trail, brs S.60°W. to Mesa and N.60°E. to Roosevelt.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 16, 17, 20, and 21, marked on brass cap

T1N R8E
 S17|S16
 S20|S21

1924

From which

An ironwood, 4 ins. diam.; brs S.13½°E., 1.31 chs. dist., marked T1N R8E S21 BT.

No other tree available.

Raise mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, level.

Soil, sandy, 3rd rate.

Timber, ironwood,

Undergrowth, palo verde, cat claw, ocotilla, and cacti.

N.89°54'E., on random line bet. secs. 16 and 21

40.00 Set temp. ¼ sec. cor.

80.10 Intersect the N. and S. line, 7 lks. S. of the cor. of secs. 15, 16, 21, and 22.

Thence

S.89°51'W., on true line bet. secs. 16 and 21.

Over level land, through scattering timber and dense undergrowth.

Survey of the Subdivision of T1N,R8E.

Chains.	
5.30	Wash, 20 lks. wide, course S.
16.30	Dim road, brs N. and S.
33.50	Road, brs N. and S.
39.00	Wash, 15 lks. wide, course S.
40.05	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S16 S21 1924
	No bearing trees available.
	Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
51.20	Wash, 20 lks. wide, course S.
56.80	Apache Trail, brs S. 60° W. to Mesa and N. 60° E. to Roosevelt.
80.10	The cor. of secs. 16, 17, 20, and 21
	Land, level.
	Soil, sandy, 3rd rate.
	Timber, ironwood.
	Undergrowth, palo verde, ocotilla, cat claw, and cacti.
	N. $0^{\circ} 2' W.$, bet. secs. 16 and 17.
	Over level land, through scattering brush and timber.
10.10	Wash, 10 lks. wide, 2 ft. deep, course SW.
17.50	Wash, 15 lks. wide, 3 ft. deep, course W.
32.00	Wash, 15 lks. wide, 2 ft. deep, course SW.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S17 S16 1924
	No bearing trees available.
	Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
46.40	Wash, 10 lks. wide, course SW.
57.30	Wash, 10 lks. wide, course SW.
68.90	Wash, 10 lks. wide, course SW.
72.90	Wash, 10 lks. wide, course W.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground for cor. of secs. 8, 9, 16, and 17, marked on brass cap
	T1N-R8E S 8 S 9 S17 S16 1924
	No bearing trees available.
	Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
	Land, level.
	Soil, sandy, 1st rate.
	Timber, palo verde and ironwood.
	Undergrowth, creosote, cacti, and sage brush.
	N. $89^{\circ} 51' E.$, on random line bet. secs. 9 and 16.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.10	Intersect the N. and S. line, 9 lks. N. of the cor. of secs. 9, 10, 15, and 16.
	Thence
	S. $89^{\circ} 55' W.$, on true line bet. secs. 9 and 16.
	Over level land, through scattering brush and timber.

Survey of the Subdivision of T1N,R8E.

Chains.	
1.90	Wash, 10 lks. wide, course SW.
13.70	Wash, 5 lks. wide, course SW.
26.70	Wash, 10 lks. wide, course SW.
33.00	Wash, 10 lks. wide, course SW.
38.30	Wash, 8 lks. wide, course S.10°W.
40.05.	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in. the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S 9 S 16 1924
	No bearing trees available.
	Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
45.10	Old road, brs NE. and SW.
52.40	Wash, 10 lks. wide, course S.
76.00	Wash, 10 lks. wide, course S.10°W.
80.10	The cor. of secs. 8, 9, 16, and 17.
	Land, level.
	Soil, sandy, 1st rate.
	Timber, palo verde, and ironwood.
	Undergrowth, cacti, creosote, and sage brush.
	N.0°2'W., bet. secs. 8 and 9. Over level land, through scattering timber and dense brush.
9.40	Old road, brs E. and W.
25.00	Wash, 20 lks. wide, course S.70°W.
40.00.	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in. the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap.
	$\frac{1}{4}$ S 8 S 9 1924
	from which
	An ironwood, 4 ins. diam., brs N.65 $\frac{1}{2}$ °W., 43 lks. dist., marked $\frac{1}{4}$ S 8 BT.
	An ironwood, 4 ins. diam., brs N.58 $\frac{1}{4}$ °E., 4.94 chs. dist., marked $\frac{1}{4}$ S 9 BT.
48.30	Telephone line, brs N.79°E. and S.79°W.
52.20	Transmission line brs N.79°E. and S.79°W.
57.90	Dim road, brs E. and W.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in. the ground, for cor. of secs. 4, 5, 8, and 9, marked on brass cap
	T1N R8E S 5 S 4 S 8 S 9 1924
	from which
	An ironwood, 6 ins. diam., brs N.20 $\frac{1}{4}$ °E., 1.80 chs. dist., marked T1N R8E S 4 BT.
	An ironwood, 14 ins. diam., brs S.28 $\frac{1}{4}$ °E., 1.49 chs. dist., marked T1N R8E S 9 BT.
	An ironwood, 26 ins. diam., brs N.79 $\frac{1}{2}$ °W., 2.59 chs. dist., marked T1N R8E S 5 BT.
	No other bearing tree available.
	Dig pits, 18x18x12 ins., NE., SE., SW., and NW. of post., 3 ft. dist.
	Land, level.
	Soil, sandy, 3rd rate.
	Timber, ironwood.
	Undergrowth, palo verde, ocotilla, and cacti.

Survey of the Subdivision of TLN, R8E.

Chains.

40.00 N. 89° 55' E., on random line bet. secs. 4 and 9.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.16 Intersect the N. and S. line, 2 lks. S. of the cor. of
 secs. 3, 4, 9, and 10.

Thence
 S. 89° 54' W., on true line bet. secs. 4 and 9.
 Over level land, through scattering timber and dense
 undergrowth.

1.06 Wash, 50 lks. wide, course S.
 16.16 Wash, 50 lks. wide, course S.
 24.66 Wash, 20 lks. wide, course S.
 40.08 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 4
 S 9
 1924

from which
 An ironwood, 12 ins. diam., brs N. 15 $\frac{1}{4}$ ° E., 1.81 chs.
 dist., marked $\frac{1}{4}$ S4 BT.
 No other bearing tree available.

70.46 Wash, 20 lks. wide, course S.
 80.16 The cor. of secs. 4, 5, 8, and 9.

Land, level.
 Soil, sandy, 3rd rate.
 Timber, ironwood.
 Undergrowth, palo verde, ocotilla, and cacti.

40.00 N. 0° 3' W., on random line, bet. secs. 4 and 5.
~~Set temp. $\frac{1}{4}$ sec. cor.~~
 80.22 Intersect the N. bdy. of the Tp., 26 lks. S. 89° 55' W.,
 of the cor. of secs. 4, 5, 32, and 33, hereinbefore des-
 cribed.

Thence
 S. 0° 8' W., on true line bet. secs. 4 and 5.
 30.00 Wash, 10 lks. wide, course SE.
 40.22 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 S 5 | S 4
 1924

from which
 An ironwood, 6 ins. diam., brs S. 70 $\frac{1}{2}$ ° E., 90 lks. dist.,
 marked $\frac{1}{4}$ S4 BT.
 An ironwood, 24 ins. diam., brs. N. 0° 30' W., 74 lks.
 dist., marked $\frac{1}{4}$ S5 BT.

58.40 Wash, 15 lks. wide, course SW.
 79.00 Wash, 10 lks. wide, course S. 70° W.
 80.22 The cor. of secs. 4, 5, 8, and 9.

Land, level.
 Soil, sandy, 3rd rate.
 Timber, ironwood.
 Undergrowth, palo verde, ocotilla, cacti, and catclaw.

From the standard cor. of secs. 31 and 32 on the S. bdy.
 of the Tp., which is an iron post, 3 ins. diam., 9 ins.
 above ground, firmly set, marked on brass cap

Survey of the Subdivision of T1N, R8E.

Chains.

S C
T1N R8E
S31 | S32

1914 and witnessed by pits,
W., N., and E. of post.

Thence
N. 0° 3' W., bet. secs. 31 and 32.
Over level land, through scattering brush and timber.
Wash, 5 lks. wide, course SW.
7.00 Road, brs NW. and SE.
19.60 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
40.00 the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S31 | S32

1924
No bearing trees available.
Dig pits, 18x18x12 ins. N. and S. of post, 3 ft. dist.
64.90 Wash, 5 lks. wide, course SW.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in
the ground, for cor. of secs. 29, 30, 31, and 32, marked
on brass cap

T1N R8E
S30 | S29
S31 | S32

1924
No bearing trees available.
Dig pits, 18x18x12 ins., NE., SE., SW., and NW., of post,
3 ft. dist.
Land; level.
Soil, sandy; 1st rate.
Timber, ironwood, and paloverde.
Undergrowth, creosote, sage brush, and cacti.

40.00 East, on random line bet. secs. 29 and 32.
Set temp. $\frac{1}{4}$ sec. cor.
79.98 Intersect the N. and S. line, 5 lks. S. of the cor. of
secs. 28, 29, 32, and 33.
Thence
S. 89° 58' W., on true line bet. secs. 29 and 32.
Over level land, through scattering brush and timber.
39.99 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S29
S32
1924

No bearing trees available.
Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
79.98 The cor. of secs. 29, 30, 31, and 32.
Land, level.
Soil, sandy, 2nd rate.
Timber, palo verde, and ironwood.
Undergrowth, creosote, sage brush, cacti.

Survey of the Subdivision of T1N, R8E.

Chains.	West, on random line bet. secs. 30 and 31. Set temp. $\frac{1}{4}$ sec. cor. Intersect the W. bdy. of the Tp., 6 lks. N. of the cor. of secs. 25, 30, 31, and 36, which is an iron post, 2 ins. in diam., 4 ins. above ground, firmly set and marked
40.00	
79.88	
	T1N R7E R8E <u>S25 S30</u> <u>S36 S31</u>
	1921 witnessed by 4 pits in their proper sections.
	Thence N. 89° 57' E., on true line bet. secs. 30 and 31. Over level land, through scattering brush and timber. Wash, 5 lks. wide, course SW. Wash, 20 lks. wide, course SW. Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap.
29.40	
34.90	
39.88	
	$\frac{1}{4}$ S30 S31 1924
	No bearing trees available. Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist. The cor. of secs. 29, 30, 31, and 32.
79.88	
	Land, level. Soil, sandy, 1st rate. Timber, palo verde and ironwood. Undergrowth, cacti, creosote brush and sage brush.

	N. 0° 3' W., bet. secs. 29 and 30. Over level land, through scattering timber and undergrowth. Wash, 5 lks. wide, course SW. Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap
12.50	
40.00	
	$\frac{1}{4}$ S30 S29 1924
	No bearing trees available. Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist. Road, brs NW. and SE. Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 19, 20, 29, and 30., marked on brass cap
61.50	
80.00	
	T1N R8E <u>S19 S20</u> <u>S30 S29</u> 1924
	No bearing trees available. Dig pits, 18x18x12 ins., NE., SE., SW., and NW. of post, 3 ft. dist. Land, level. Soil, sandy, 1st rate. Timber, palo verde and ironwood. Undergrowth, creosote, sage brush, and cacti.

Survey of the Subdivision of T1N, R8E.

Chains.

N.89°58'E., on random line bet. secs. 20 and 29.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.96 Intersect the N. and S. line; 14 lks. N. of the cor. of
 secs. 20, 21, 28, and 29.

Thence

N.89°56'W., on true line bet. secs. 20 and 29.
 Over level land, through scattering brush and timber.
 1.05 Wash, 5 lks. wide, course SW.
 7.15 Wire fence, brs NW. and SE.
 17.00 Wire fence, brs N. and S.
 20.15 Wash, 10 lks. wide, course SW.
 26.00 Wash, 5 lks. wide, course SW.
 37.85 Wash, 5 lks. wide, course S.10°W.
 39.98 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

 $\frac{1}{4}$ S20

S29

1924

No bearing trees available.

45.15 Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 Wash, 15 lks. wide, course SW.

79.96 The cor. of secs. 19, 20, 29, and 30.

Land, level.

Soil, sandy, 1st rate.

Timber, palo verde, and ironwood.

Undergrowth, cacti, creosote brush and sage brush.

40.00 S.89°57'W., on random line bet. secs. 19 and 30.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.84 Intersect the W. bdy. of the Tp., 2 lks. S. of the cor.
 of secs. 19, 24, 25, and 30, which is an iron post,
 2 ins. diam., 10 ins. above ground, firmly set, marked
 on brass cap

T1N

R7E R8E

S24|S19

S25|S30

1921 witnessed by 3 bearing
 trees and 4 pits, as described in original notes.

Thence

N.89°57'E., on true line bet. secs. 19 and 30.
 Over level land, through scattering brush and timber.
 36.45 Wash, 10 lks. wide, course SW.
 39.84 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

 $\frac{1}{4}$ S19

S30

1924

No bearing trees available.

66.25 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
 Road, brs NW. and SE:

79.84 The cor. of secs. 19, 20, 29, and 30.

Land, level.

Soil, sandy, 1st rate.

Timber, palo verde and ironwood.

Undergrowth, creosote, cacti, sage brush.

Survey of the Subdivision of TLN, R8E.

Chains.	
	N.0°3'W., bet. secs. 19 and 20 Over level land, through scattering brush and timber.
22.20	Wash, 10 lks. wide, course SW.
39.80	Highway, brs E. and W.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 48 ins. in the ground, or 12 ins. below the surface of the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S S19 S20 1924
	from which
	A palo verde, 8 ins. diam., brs N.78 $\frac{1}{2}$ °W., 3.27 chs. dist., marked $\frac{1}{4}$ S19 BT.
	A palo verde, 8 ins. diam., brs S.51°E., 2.00 chs. dist., marked $\frac{1}{4}$ S20 BT.
54.70	Wash, 8 lks. wide, course SW.
67.30	Wash, 8 lks. wide, course SW.
74.40	Dim road, brs NW. and SE.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 27 ins in the ground, for cor. of secs. 17,18,19, and 20, marked on brass cap
	TLN R8E S18 S17 S19 S20 1924
	Raise mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
	No bearing trees available. Land, level. Soil, sandy, 1st rate. Timber, palo verde, Undergrowth, cacti, creosote, and sage brush.
40.00	S.89°56'E., on random line bet. secs. 17 and 20.
80.00	Set temp. $\frac{1}{4}$ sec. cor. Intersect the N. and S. line, 5 lks. N. of the cor. of secs. 16,17,20, and 21.
	Thence
	N.89°54'W., on true line bet. secs. 17 and 20.
14.50	Over level land, through scattering timber and brush.
40.00	Wash, 10 lks. wide, 1 ft. deep, course SW. Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S17 S20 1924
	No bearing trees available. Raise mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
51.00	Wash, 10 lks. wide, course S.
58.00	Wash, 8 lks. wide, course S.
71.20	Wash, 5 lks. wide, course SW.
74.60	State Highway, brs N.55°W. to Mesa and S.55°E. to Tucson.
80.00	The cor. of secs. 17,18,19, and 20.
	Land, level. Soil, sandy, 1st rate. Timber, palo verde. Undergrowth, cacti, creosote, sage brush.

Survey of the Subdivision of T1N, R8E.

Chains.

40.00 S. 89° 58' W., on random line bet. secs. 18 and 19.
 79.71 Set temp. 1/4 sec. cor.
 Intersect the W. bdy. of the Tp., 7 lks. N. of the cor. of secs. 13, 18, 19, and 24, which is an iron post, 2 ins. diam., 10 ins. above ground, firmly set, marked on brass cap

T1N
 R7E R8E
 S13 | S18
 S24 | S19

1921 and witnessed by 1 pit in each section.

6.00 Thence
 39.71 N. 89° 55' E., on true line bet. secs. 18 and 19.
 Over level land, through scattering brush and timber.
 Wash, 5 lks. wide, course SW.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4 S18
 S19
 1924 Raise mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

44.60 No bearing trees available.
 Wash, 5 lks. wide, 2 ft. deep, course SW.

79.71 The cor. of secs. 17, 18, 19, and 20.

Land, level.
 Soil, sandy, 1st rate.
 Timber, palo verde.
 Undergrowth, creosote brush, cacti, and catclaw.

3.90 N. 0° 3' W., bet. secs. 17 and 18.
 7.50 Over level land, through scattering timber and undergrowth.
 40.00 State Highway, brs N. 55° W. to Mesa and S. 55° E. to Tucson
 Wash, 10 lks. wide, course SW.
 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4
 S18 | S17

55.30 No bearing trees available.
 59.20 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
 73.30 Wash, 5 lks. wide, 2 ft. deep, course W.
 80.00 Old highway, Mesa to Roosevelt, brs. E. and W.
 Wash, 10 lks. wide, course SW.
 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 7, 8, 17, and 18, marked on brass cap.

T1N R8E
 S 7 | S 8
 S18 | S17

1924

No bearing trees available.
 Dig pits, 18x18x12 ins., NE., SE., SW., and NW. of cor., 3 ft. dist.

Land, level.
 Soil, sandy, 1st rate.
 Timber, palo verde and ironwood.
 Undergrowth, creosote, sage brush and cacti.

Survey of the Subdivision of T1N, R8E.

Chains.
 40.00 S.89°54'E., on random line bet. secs. 8 and 17.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.10 Intersect the N. and S. line, 2 lks. N. of the cor. of
 secs. 8; 9, 16; and 17.
 Thence
 N.89°53'W., on true line bet. secs. 8 and 17.
 Over level land, through dense brush and scattering
 timber.
 23.60 Old road, Mesa to Roosevelt, brs N.68°E. and S.68)W.
 40.05 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 8
SI7
 1924

No bearing trees available.
 Dig pits, 18x18x12 ins. E. and W. of post, 3 ft. dist.
 55.30 Wash, 20 lks. wide, course S.
 77.20 Wash, 15 lks. wide, course S.20°W.
 80.10 The cor. of secs. 7, 8, 17, and 18.
 Land, level.
 Soil, sandy, 3rd rate.
 Timber, ironwood.
 Undergrowth, palo verde, ocotilla, cacti, and catclaw.

40.00 S.89°55'W., on random line bet. secs. 7 and 18.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.64 Intersect the W. bdy. of the Tp., 7 lks. N. of the cor.
 of secs. 7, 12, 13, and 18, which is an iron post, 2 ins.
 diam., 9 ins. above ground, firmly set, marked on
 brass cap

T1N
 R7E R8E
S12 | S 7
S13 | S18

1921 and witnessed by 4
 bearing trees, 1 in each section.

Thence
 N.89°52'E., on true line bet. secs. 7 and 18.
 Over level land, through scattering brush, and timber.
 21.95 Wash, 10 lks. wide, course SW.
 39.64 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 7
S18
 1924

No bearing trees available.
 Raise mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
 42.75 Wash, 10 lks. wide, course SW.
 46.25 Dim road, brs NE. and SW.
 49.75 Dim road; brs N. and S.
 61.85 Wash, 5 lks. wide, course SW.
 75.05 Wash, 5 lks. wide, course SW.
 79.64 The cor. of secs. 7, 8, 17; and 18.
 Land, level.
 Soil, sandy, 1st rate.
 Timber, palo verde and ironwood.
 Undergrowth, creostoe, cacti, and sage brush.

Survey of the Subdivision of T1N, R8E.

Chains. N.0°3'W., bet. secs. 7 and 8.
 Over level land, through scattering timber and under-
 growth.

13.90 Wash, 10 lks. wide, course W.
 34.10 Telephone, line, brs N.80°E. and S.80°W.
 37.50 Transmission line, brs N.79½°E., and S.79½°W.
 37.60 Dim road, brs E. and W.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
 the ground, for ¼ sec. cor., marked on brass cap

¼
 S 7 | S 8

1924

No bearing trees available.
 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
 43.40 Dim road, brs NE. and SW.
 44.30 Wash, 10 lks. wide, course SW.
 70.30 Wash, 20 lks. wide, course SW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in
 the ground, to bed rock, deposit a stone marked with a
 cross (X) at base of post, and raise mound of stone,
 4 ft. base, 1½ ft. high, around post, for cor. of secs.
 5, 6, 7, and 8., marked on brass cap

T1N R8E
 S 6 | S 5
 S 7 | S 8

1924

No bearing trees available.

Land, level.
 Soil, sandy, 1st rate.
 Timber, palo verde and ironwood.
 Undergrowth, creosote, cacti, and sage brush.

80.04 S.89°53'E., on random line bet. secs. 5 and 8.
 Intersect the N. and S. line, 2 lks. N. of the cor. of
 secs. 4, 5, 8, and 9,

Thence
 N.89°52'W., on true line bet. secs. 5 and 8.
 Over level land, through dense brush.

3.00 Wash, 10 lks. wide, course S. 80°W.
 13.50 Wash, 50 lks. wide, course SW.
 37.50 Road, brs NE. and SW.
 40.02 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, for ¼ sec. cor., marked on brass cap

¼ S 5
 S 8

1924

No bearing trees available.
 from which
 An ironwood, 14 ins. diam., brs N.75½°W., 1.24 chs.
 dist., marked ¼ S5 BT.
 An ironwood, 18 ins. diam., brs S.72°W., 2.15 chs.
 dist., marked ¼ S8 BT.

41.50 Wash, 20 lks. wide, course SW.
 48.20 Road, brs N. and S.
 52.50 Wash, 20 lks. wide, course SW.
 80.04 The cor. of secs. 5, 6, 7, and 8.

Land, level.
 Soil, sandy, 3rd rate.
 Timber, ironwood.
 Undergrowth, palo verde, ocotilla, catclaw, and cacti.

Survey of the Subdivision of T1N, R8E.

Chains.

40.00
79.58

S.89°52'W., on random line bet. secs. 6 and 7.
Set temp. $\frac{1}{4}$ sec. cor.
Intersect the W. bdy. of the Tp., 9 lks. S. of the cor. of secs. 1, 6, 7, and 12, which is an iron post, 3 ins. diam., 10 ins. above ground, firmly set, marked on brass cap

T1N
R7E R8E
S 1 | S 6
S 12 | S 7

1921 and witnessed by a mound of stone on the west.

Thence

7.50
10.00
21.30
35.90
39.58

N.89°56'E., on true line bet. secs. 6 and 7.
Over level land, through scattering brush and undergrowth.
Wash, 10 lks. wide, course S.
Wash, 10 lks. wide, course S.10°W.
Wash, 10 lks. wide, course SW.
Wash, 10 lks. wide, course SW.
Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 6
S 7
1924

No bearing trees available.

48.70
52.80
60.20
61.90
63.80
67.50
74.60

Raise mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
Wash, 20 lks. wide, course S.10°E.,
Wash, 10 lks. wide, course S.10°W.
Wash, 20 lks. wide, course SW.
Dim road, brs NE. and SW.
Dim road, brs N.20°E. and S.20°W.
Wash, 10 lks. wide, course S.20°W.
Wash, 5 lks, wide, course SW.

79.58

The cor. of secs. 5, 6, 7, and 8.

Land, level.

Soil, sandy, 3rd rate.

Timber, palo verde and ironwood.

Undergrowth, creosote, sage brush, cacti, and catclaw.

40.00
79.96

N.0°9'E., on random line bet. secs. 5 and 6.
Set temp. $\frac{1}{4}$ sec. cor.
Intersect the N. bdy. of the Tp., 42 lks. N.89°55'E., of the cor. of secs. 5, 6, 31, and 32, hereinbefore described.

Thence

6.00
9.80
25.00
26.40
39.96

S.0°9'E., on true line bet. secs. 5 and 6.
Over level land, through scattering brush and timber.
Wash, 10 lks. wide, 5 ft. deep, course S.10°W.
Wash, 20 lks. wide, 6 ft. deep, course SW.
Wash, 30 lks. wide, 15 ft. deep, course SW.
Wash, 10 lks. wide, course SW.
Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone, 4 ft. base, 2 ft. high, around post, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S 6 | S 5

1924

No bearing trees available.

Survey of the Subdivision of T1N, R6E.

Chains.

- 49.90 Wash, 10 lks. wide; course S.10°W.
- 50.70 Wash, 40 lks. wide, 5 ft. deep, course SW.
- 58.30 Wash, 50 lks. wide, course SW.
- 59.15 Dim road, brs NE. and SW.
- 68.10 Wash, 10 lks. wide, course SW.
- 75.15 Wash, 5 lks. wide, course SW.
- 79.96 The cor. of secs. 5, 6, 7, and 8.

Land, level and rolling.
 Soil, sandy and rocky, 2nd and 3rd rate.
 Timber, palo verde
 Undergrowth, cacti, creosote, catclaw, and sage brush.

FINAL TEST

The final test of Young and Sons light mountain transit No. 8540, used by Dupree R. Averill, U. S. Surveyor and Buff and Buff light mountain transit No. 9221 used by Roger F. Wilson, U. S. Transitman, was made by Roger F. Wilson on meridian established on March 10, 1924, located near the cor. of secs. 20, 21, 28, and 29, T1N, R8E., G. and S.R.B. and M. Arizona, latitude $33^{\circ}24'N.$, longitude, $111^{\circ}32'W.$

Roger F. Wilson examines the adjustments of both transits and finds them correct; then to test the solar apparatus by comparing their indications, resulting from observations made during a.m. and p.m. hours, with a meridian established by himself on March 10, 1924, described on page 2, he proceeds as follows:

Mar. 16, 1924: At 9h 0m a.m., l.m.t., I set off $33^{\circ}24'N.$ on the lat. arcs and $1^{\circ}39\frac{1}{2}'S.$ on the decl. arcs and determine a meridian with the solar, which I find to agree with the true meridian.

At apparent noon, with the lat. arcs unchanged, I observe the sun on the meridian; the resulting reading of each decl. arc is $1^{\circ}36'S.$, which agrees with the computed decl. of the sun.

At 3h 0m p.m., l.m.t., with the lat. arcs unchanged, I set off $1^{\circ}32\frac{1}{2}'S.$ on the decl. arcs and determine a meridian with each solar, which I find to agree with the true meridian.

As all observations during the usual hours of solar work come within $1'30''$ of the true meridian I conclude that the solar apparatus were maintained in satisfactory adjustment, throughout the survey of this township.

Boundaries of Township 1 North, Range 8 East
Latitudes, departures and closing errors.

Line designated	True bearing	Distance	Latitudes		Departures	
			N.	S.	E.	W.
South boundary	West	480.00				480.00
West boundary	North	480.00	480.00			
North boundary	N. $89^{\circ}55'E$	479.70	.70		479.70	
East boundary	South	480.00		480.00		
Convergency					.48	
<u>Totals</u>			480.70	480.00	480.18	480.00
			480.00		480.00	
			Error in lat. ----- -0.70		Error in dep. ----- -0.18	

GENERAL DESCRIPTION

The land in this township is generally level with the exception of a few small hills along the north boundary. The mining camp of Goldfield is located in Sec. 1, and the Apache Trail, extending from Phoenix to the Roosevelt Dam, passes, through the township. The station of Apache Junction is situate in Sec. 20. Timber consists of scattering palo verde and ironwood. Undergrowth is cacti, creosote, catclaw and sagebrush.

CERTIFICATE OF UNITED STATES TRANSITMAN.

I, Roger F. Wilson, U. S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 124, Arizona, bearing date of the 15th day of October, 1923, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the North boundary and Subdivision lines of

TOWNSHIP 1 NORTH, RANGE 8 EAST.

of the GIP and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes and by diagram on page 1 hereof as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 124, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place: Carryo California Roger F. Wilson U. S. Transitman. Date: March 3, 1926

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

, 191

The foregoing field notes of the survey of

executed by

under his special instructions dated, 191, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Surveyor General

I certify that the foregoing transcript of the field notes of the above-described surveys in, has been correctly copied from the original notes on file in this office.

U. S. Surveyor General

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Dupree R. Averill, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 124, Arizona, bearing date of the 15th day of October, 1923, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the North boundary, and Subdivision lines of

TOWNSHIP 1 NORTH, RANGE 8 EAST.

of the Gila and Salt River Base and Meridian, in the State of Arizona, and by diagram on page 1 hereof the foregoing field notes/as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 124, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place: Campo, California. Date: March 3, 1926

Dupree R. Averill U. S. Surveyor.

APPROVAL.

OFFICE OF THE U.S. SUPERVISOR OF SURVEYS,

Denver, Colorado, March 17, 1926.

The foregoing field notes of the survey of the North boundary, and Subdivision lines of TOWNSHIP 1 NORTH, RANGE 8 EAST.

of the Gila and Salt River Base and Meridian, in the State of Arizona,

executed by Dupree R. Averill, U.S. Surveyor and Roger F. Wilson, U. S. Transitman, under his special instructions dated October 15, 1923, for Group 124, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Roger F. Wilson U.S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above-described surveys in, has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.