

3704

Book "G"  
4-879

BOOK 3704

*Qua*

# FIELD NOTES

OF THE <sup>RE</sup>SURVEY OF THE

West Boundary,

AND OF THE SURVEY OF THE

North boundary,

East boundary, and

Subdivision lines of

TOWNSHIP 7 SOUTH, RANGE 18 EAST,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

Glenn F. Sawyer, U. S. Surveyor,

and

Theodore Vander Meer, U.S. Transitman,

*In the capacity of U. S. Surveyors, under Special Instructions dated October 24, 1923, issued by the United States Surveyor General to govern surveys included in Group No. 125, Arizona, which were approved by the Commissioner of the General Land Office, November 3, 1923, and Assignment Instructions dated November 16, 1923.*

Resurvey and Survey commenced February 12, 1924.

Resurvey and Survey completed April 8, 1924.

3704


3704

1A

Book "G"  
Group 125 - Arizona.

BOOK 3704

INDEX DIAGRAM.

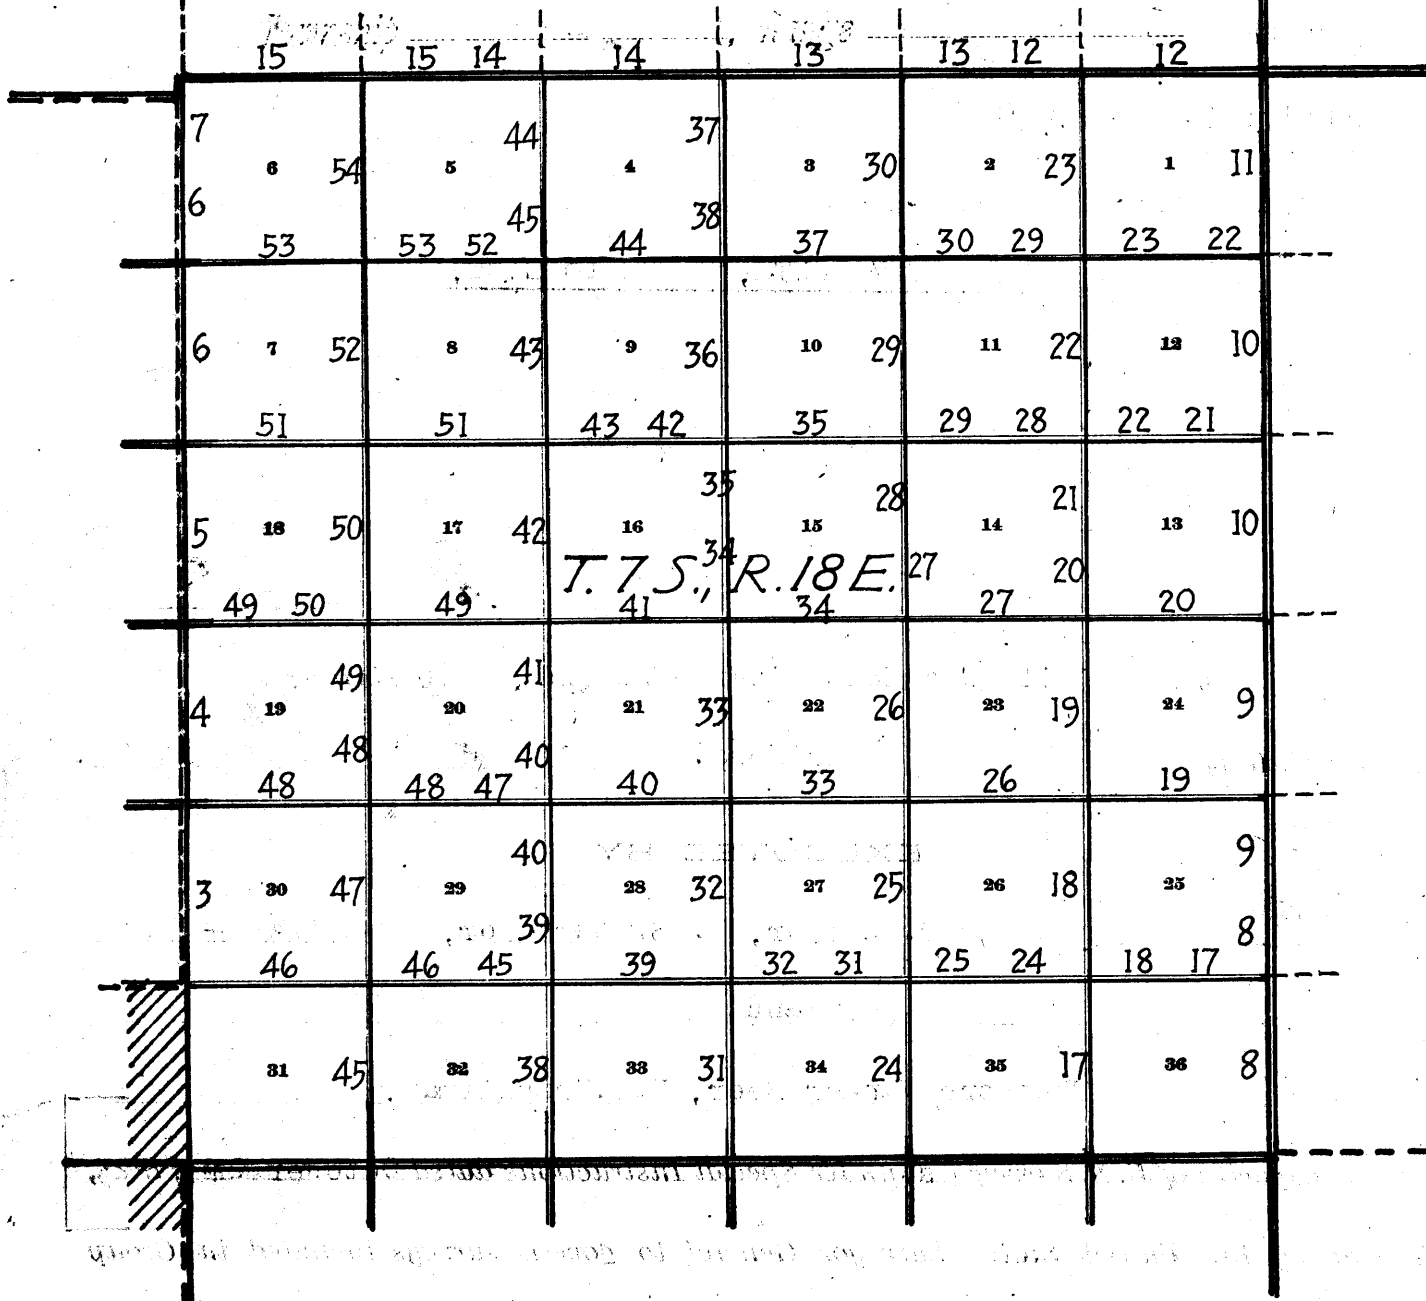

- Lines surveyed under this group.
- Lines resurveyed under this group.
- Accepted surveys.
- Unsurveyed lines.
- Areas surveyed as per accepted plats on file.

1B

**BOOK 3704**

Book "G"  
Group 125 - - - Arizona.  
Township 7 South, Range 18 East.

**DATE DIAGRAM**  
1924.

	3-31	3-31	3-27	3-17	3-17	3-14
4-7	6 4-8 3-31	5 3-30 3-27	4 3-27 3-29	3 3-27 2-27	2 2-29 2-27	1 2-27 2-25 3-9
4-7	7 4-8 3-30	8 2-27 2-27	9 2-26 3-26	10 2-28 2-27	11 2-28 2-27	12 2-27 2-25
4-1	18 3-23 3-23	17 2-23 2-23	16 2-22 2-21	15 2-24 2-24	14 2-22 2-23	13 2-22 2-25
3-20	19 3-20 2-23	20 2-19 2-22	21 2-20 2-21	22 2-21 2-20	23 2-21 2-23	24 2-23 2-22
3-20	30 2-19 2-19	29 2-16 2-19	28 2-16 2-20	27 2-15 2-20	26 2-13 2-21	25 2-13 2-12
	31 2-17 2-17	32 2-17 2-17	33 2-15 2-15	34 2-13 2-13	35 2-13 2-13	36 2-12 2-12

For dates of survey of this line, see Book "F"

- Indicates lines surveyed by Theodore Vander Meer, U.S. Transitman, on dates shown thereon.
- - - - - Indicates lines resurveyed by Theodore Vander Meer, U.S. Transitman, on dates shown thereon.
- Indicates lines surveyed by Glenn F. Sawyer, U.S. Surveyor, on dates shown thereon.
- Indicates accepted surveyed lines.
- Indicates lines surveyed under this group, notes in other books.

Resurveys and surveys herein described were executed on dates shown on diagram on page 1 hereof, by Glenn F. Sawyer, U.S. Surveyor, using Young and Sons light mountain transit No. 8478, and Theodore Vander Meer, U.S. Transitman, using Buff and Buff light mountain transit No. 9208, each equipped with full vertical circle and Smith solar attachment; unless otherwise specified, all azimuth determinations were accomplished with the solar attachments.

February 10, 1924: At camp, near  $\frac{1}{4}$  sec. cor. of secs. 21 and 22, T. 8 S., R. 18 E., G. & S. R. B. & M., Arizona, in latitude,  $32^{\circ}43\frac{1}{2}'$  N.; longitude,  $110^{\circ}30'$  W., we examine the adjustments of the transits and correct all errors; then, to test the solar apparatus, by comparing their indications, resulting from observations, made during a.m. and p.m. hours with a meridian established by Polaris observation at this station on Jan. 20, 1924, as described in Book "F.", we proceed as follows:

At 8h. 0m., a.m., l.m.t., we set off  $32^{\circ}43\frac{1}{2}'$  N. on the lat. arcs;  $14^{\circ}34\frac{1}{2}'$  S. on the decl. arcs; and determine a meridian with the solars, which we find to agree with the true meridian.

At apparent noon, with the lat. arcs unchanged, we observe the sun on the meridian; the resulting reading of each decl. arc is  $14^{\circ}32\frac{1}{2}'$  S., which agrees with the computed decl. of the sun.

At 4h. 0m. p.m., l.m.t., with the lat. arcs unchanged, we set off  $14^{\circ}28'$  S. on the decl. arc, and determine a meridian with each solar, which we find to agree with the true meridian.

As all of the solar observations made during the usual hours of solar work come within 1' of the true meridian, we conclude that the adjustments of the instruments are satisfactory.

-----

Unless otherwise specified, all measurements are made with Lufkin steel tapes, 5 chs. in length, compared with a Lufkin 1 ch. standard steel tape and found correct. The measurements are made on the slope, the vertical angles determined, and the slope measurements, properly reduced to true horizontal distances for entry in the field notes.

-----

Resurvey of part of the West bdy. of Township 7 South, Range 18 East. 3

Chains.

The West bdy. of T. 7 S., R. 18 E. was surveyed in 1905 by J.F. Hesse, U.S.D.S., establishing all sec. and 1/4 sec. cor. monuments thereon, with a common reference to areas on both sides of the lines.

No retracement or resurvey of any part of this line is of record.

The following notes describe a resurvey of the North 5 miles of the line.

The land on both sides of this portion of the range line being unsurveyed, the line is subject to rectification; therefore, resurvey same due north, reestablishing the 1/4 sec. and sec. cors. alternately, at intervals of 40.00 chs., retaining the original common reference of said cors. and destroying all the original cor. monuments including the original cor. of Ts. 6 and 7 S., Rs. 17 and 18 E. Reestablish the cor. of Ts. 6 and 7 S., Rs. 17 E. at 400.00 chs. N., and reestablish the cor. of Ts. 6 and 7 S., R. 18 E. at point where the range line is intersected by the N. bdy. of T. 7 S., R. 18 E., surveyed due West, as hereinafter described.

The original cor. of secs. 25, 30, 31 and 36, T. 7 S., Rs. 17 and 18 E. is a granite stone, 14x12x5 ins. above ground, firmly set, marked with 1 notch on S. face, and 5 notches on N. face, and witnessed by a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor., and two cedar bearing trees, one 8 ins. in diam., N. 63° E., 157 lks. dist., marked T7S R18E S30 BT, and the other 6 ins. in diam., S. 26° E., 112 lks. dist., marked T7S R18E S31 BT.

This cor. monument retains its original reference, and being in good condition and properly marked and witnessed, no reconstruction or alteration of same is required.

Thence,

North, on true line, bet. secs. 25 and 30.

Over heavily rolling land, thru. scattering undergrowth.

Ascend 23 ft., over SW. slope, to

9.30 Wash, 20 lks. wide, course SW.

Ascend 140 ft., over SE. slope.

17.00 Point of spur, slopes SE.

Descend 10 ft., over NE. slope.

18.80 Same wash, 20 lks. wide, course SE. Enter mountainous land.


Ascend 255 ft., over S. slope.

30.00 Spur, slopes SW.

Descend 142 ft., over NW. slope to 1/4 sec. cor.

39.98 A point 5 lks. W. of the original 1/4 sec. cor. of secs. 25 and 30, which is a granite stone, 8x5x4 ins. above ground firmly set, marked 1/4 on W. face, and witnessed by a mound of stone, W. of cor. No bearing trees. Destroy all trace of this cor. monument.

40.00 Set an iron post, 3 ft. long; 1 in. in diam., 12 ins. in the ground to bed rock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone around post for reestablished 1/4 sec. cor. of secs. 25 and 30, marked on brass cap,



No bearing trees available.

Descend 84 ft., over NW. slope.

44.17 Wash, 20 lks. wide, course W.

Ascend 155 ft., over S. slope.

58.37 Spur, slopes W. Enter heavily rolling land,

Descend 90 ft., over NW. slope.

73.70 Wash, 10 lks. wide, course SW.

Ascend 94 ft., over S. slope, to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 15 ins. in the ground to bed rock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone around post, for reestablished cor. of secs. 19, 24, 25 and 30, marked on brass cap,

## BOOK 3704

4 Resurvey of part of the West bdy. of Township 7 South, Range 18 East.

Chains.

T7S	
R17E	R18E
S24	S19
-----	
S25	S30
1924	

No bearing trees available.  
 Land, heavily rolling and mountainous.  
 Soil, sandy and rocky, 3rd rate.  
 Timber, none.  
 Undergrowth; scrub oak, mahogany, palo verde, greasewood,  
 catclaw and cactus.

-----

North, on true line, bet. secs. 19 and 24.  
 Over heavily rolling land and mountainous land, thru. scattering undergrowth.  
 Ascend 61 ft., over S. slope.  
 0.35 A point 9 lks. E. of the original cor. of secs. 19, 24, 25 and 30, which is an old mound of stone, with no marked stone. No bearing trees.  
 Destroy this old mound.  
 4.50 Spur, slopes W.  
 Descend 106 ft., over N. slope.  
 10.00 Bottom of gulch, course N. 65° W.  
 Ascend 69 ft., over S. slope.  
 16.50 Spur, slopes W.  
 Descend 48 ft., over N. slope.  
 20.30 Bottom of gulch, course N. 65° W.  
 Ascend 247 ft., over SW. slope.  
 34.00 Spur, slopes W.  
 Descend 35 ft., over NW. slope, to  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for reestablished  $\frac{1}{4}$  sec. cor. of secs. 19 and 24, marked on brass cap,

+	
S24	S19
-----	
1924	

No bearing trees available.  
 Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
 Descend 100 ft., over NW. slope.  
 40.53 A point 12 lks. E. of the original  $\frac{1}{4}$  sec. cor. of secs. 19 and 24, which is a slate stone 8x5x4 ins. above ground, marked  $\frac{1}{4}$  on W. face, and witnessed by a mound of stone W. of cor. No bearing trees.  
 Destroy all trace of this monument.  
 45.00 Bottom of gulch, course W.  
 Ascend 243 ft., over SW. slope.  
 56.70 Spur, slopes W.  
 Descend 325 ft., over NW. slope.  
 74.50 Bottom of gulch, course S. 65° W.  
 Ascend 156 ft., over SE. slope, to  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bed rock, supported in a mound of stone, for reestablished cor. of secs. 13, 18, 19 and 24, marked on brass cap,

T7S	
R17E	R18E
S13	S18
-----	
S24	S19
1924	

No bearing trees available. Reset original sec. cor. stone 18x7x6 ins. marked with 3 notches on each of N. and S. faces, 12 ins. in the ground alongside of post.  
 Land, heavily rolling and mountainous.  
 Soil, rocky granite formation, 4th rate.

Resurvey of part of West bdy. of Township 7 South, Range 18 East. 5

Chains.

Timber, none.  
Undergrowth, scrub juniper, oak, mahogany, catclaw, mesquite and cactus.

- North, on true line, bet. secs. 13 and 18.  
Over mountainous land, thru. scattering undergrowth.  
Ascend 191 ft. over SE. slope.
- 0.45 A point 23 lks. E. of the original cor. of secs. 13, 18, 19 and 24, which is a slate stone, 7x6x4 ins. above ground, marked with 3 notches on each of N. and S. faces, and witnessed by a mound of stone W. of cor. No bearing trees. Destroy the mound of stone. Remove the marked stone, and reset same alongside the iron post as hereinbefore described.
- 11.45 Spur, slopes SW.  
Descend 535 ft., over NW; slope, to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for reestablished  $\frac{1}{4}$  sec. cor. of secs. 13 and 18, marked on brass cap,

$\frac{1}{4}$   
 S13 | S18  
 1924

- No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
Descend 130 ft., over N. slope.
- 40.49 A point 34 lks. E. of the original  $\frac{1}{4}$  sec. cor. of secs. 13 and 18, which is a slate stone, 8x8x6 ins. above ground marked  $\frac{1}{4}$  on W. face, and witnessed by a mound of stone W. of cor. No trace of the original cedar bearing tree SE. of cor. Destroy all trace of this cor. monument.
- 48.40 Holy Joe wash, 100 lks. wide, course W.  
Ascend 285 ft. over S. slope. Enter scattering timber.
- 70.00 Mud Springs and Wooten's house bear E. about 7.00 chs. dist.
- 70.50 Spur, slopes W.  
Descend 70 ft., over NE. slope.
- 77.10 Bottom of gulch, course W.  
Ascend 50 ft., over S. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 7, 12, 13 and 18, marked on brass cap,

T7S  
 R17E | R18E  
 S12 | S 7  
 S13 | S18  
 1924

from which,

- A mesquite, 6 ins. in diam., brs. S. 41 $\frac{1}{2}$ ° E., 412 lks. dist., marked T7S R18E S18 BT.
- A palo verde, 6 ins. in diam., brs. S. 83° W., 49 lks. dist., marked T7S R17E S13 BT.
- A palo verde, 6 ins. in diam., brs. N. 44 $\frac{1}{2}$ ° W., 89 lks. dist., marked T7S R17E S12 BT.

No other bearing tree available.

Land, mountainous.

Soil, rocky and granite formation, 4th rate.

Timber, palo verde and mesquite.

Undergrowth, scrub oak, mahogany, catclaw and cactus.

## BOOK 3704

## 6 Resurvey of part of the West bdy. of Township 7 South, Range 18 East.

Chains

- North, on true line, bet. secs. 7 and 12.  
Over mountainous land, thru. scattering timber and undergrowth.
- 0.34 Ascend 545 ft., over S. slope.  
A point 56 lks. E. of the original cor. of secs. 7, 12, 13 and 18, which is a sandstone, 12x6x5 ins. above ground, marked with 4 notches on S. face and 2 notches on N. face, and witnessed by a mound of stone W. of cor., and two bearing trees:  
A palo verde, 7 ins. in diam., N. 31° W., 28 lks. dist., marked T7S R17E S12BT, and  
A catclaw, 6 ins. in diam., N. 2° E., 34 lks. dist., marked T7S R18E S7 BT.
- 31.75 Destroy all trace of this cor. monument.  
High spur, slopes W.
- 40.00 Descend 154 ft., over N. slope, to  
Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for reestablished  $\frac{1}{4}$  sec. cor. of secs. 7 and 12, marked on brass cap;

$$\begin{array}{c} \frac{1}{4} \\ \hline S12 | S 7 \end{array}$$

1924

from which,

An oak, 8 ins. in diam., brs. N. 89 $\frac{1}{2}$ ° W., 190 lks. dist., marked  $\frac{1}{4}$  S 12 BT.An oak, 16 ins. in diam., brs. S. 88 $\frac{1}{4}$ ° E., 185 lks. dist., marked  $\frac{1}{4}$  S 7 BT.

The original  $\frac{1}{4}$  sec. cor. of secs. 7 and 12, brs. S. 85° W., 62 lks. dist., and is a granite stone, 10x8x4 ins., above ground, marked  $\frac{1}{4}$  on W. face, and witnessed by a mound of stone W. of cor., and two oak bearing trees, one S. 46 $\frac{3}{4}$ ° E., 189 lks. dist., and another S. 38° W., 139 lks. dist. Destroy all trace of this cor. monument.

- 63.30 Descend 675 ft., over broken N. slope.  
Wash, 50 lks. wide, course W.
- 80.00 Ascend 500 ft., over SW. slope, to  
Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for reestablished cor. of secs. 1, 6, 7 and 12, marked on brass cap,

$$\begin{array}{c} T7S \\ R17E | R18E \\ S 1 | S 6 \\ \hline S12 | S 7 \\ 1924 \end{array}$$

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, mountainous.

Soil, rocky and granite formation, 3rd and 4th rate.

Timber, oak, juniper, and cedar.

Undergrowth, mahogany, catclaw, scrub mesquite and cactus.

- North, on true line, on W. bdy. of sec. 6.  
Over mountainous land, thru. scattering timber and undergrowth.
- 0.42 Ascend 85 ft., over SW. and S. slopes.  
A point 79 lks. E. of the original cor. of secs. 1, 6, 7 and 12, which is a granite stone, 20x12x6 ins., firmly set in mound of stone, marked with 5 notches on S. face and 1 notch on N. face, and witnessed by a mound of stone W. of cor. No bearing trees.
- 13.50 Destroy all trace of this cor. monument.  
Ridge, brs. NE. and SW.
- 40.00 Descend 65 ft., over NW. slope, to  
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished  $\frac{1}{4}$  sec. cor. of secs. 1 and 6, marked on brass cap,



Resurvey of part of the West bdy. of Township 7 South, Range 18 E. 7

Chains.

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 1 \mid \text{S } 6 \\ 1924 \end{array}$$

- No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
Descend 535 ft., over NW. slope to cor. of Ts. 6 and 7 S., R. 18 E.
- 40.72 A point 67 lks. E. of the original  $\frac{1}{4}$  sec. cor. of secs. 1 and 6, which is a sandstone, 18x8x6 ins., firmly set in a mound of stone, and witnessed by a mound of stones W. of cor. No bearing trees. Destroy all traces of this cor. monument.
- 80.00 Set an iron post, 3 ft. long, 3 ins. in diam., 27 ins. in the ground for reestablished cor. of Ts. 6 and 7 S., R. 17 E., marked on brass cap,

$$\begin{array}{c} \text{T6S} \\ \text{R17E} \mid \text{T7S} \\ \text{S36} \mid \text{R18E} \\ \hline \text{S } 1 \mid \text{S } 6 \\ \text{T7S} \\ 1924 \end{array}$$

- No bearing trees available.  
Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
Continue line and measurement.
- 80.72 A point 72 lks. E. of the original cor. of Ts. 6 and 7 S., Rs. 17 and 18 E., which is a granite stone, 8x6x6 ins. above ground, firmly set, marked with 6 notches on each of N., S., E. and W. edges, 18 E on E. face, and 7 S on S. face, and witnessed by a mound of stone, S. of cor.  
No bearing trees.  
Destroy all trace of this cor. monument.
- 84.94 Intersect the N. bdy. of T. 7 S., R. 18 E., surveyed due West. Cor. of Ts. 6 and 7 S., R. 18 E. established at this point of intersection as hereinafter described.  
Land, mountainous.  
Soil, granite formation and sand, 3rd and 4th rate.  
Timber, oak and cottonwood.  
Undergrowth, scrub oak, mahogany, mesquite, catclaw and cactus.
-

## BOOK 3704

## 8 Survey of East boundary of Township 7 South, Range 18 East.

Chains.

From the cor. of Ts. 7 and 8 S., Rs. 18 and 19 E., described in Book "F" of this group,  
North, on true line, bet. secs. 31 and 36.  
Over mountainous land, thru. scattering timber and undergrowth.  
Ascend 760 ft., over broken S. slope.  
14.00 Spur, slopes SE.; continue ascent.  
28.00 Ridge, brs. SE. and NW. Over E. slope.  
36.00 Spur, slopes NE.  
Descend 1701 ft., over N. slope, to  
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bed rock, supported in a mound of stone, for  $\frac{1}{4}$  sec. cor. of secs. 31 and 36, marked on brass cap,

$\frac{1}{4}$   
 S36 | S31  
 1924

from which,

A juniper, 20 ins. in diam., brs. N.  $72\frac{1}{2}^{\circ}$  E., 180 lks. dist., marked  $\frac{1}{4}$  S 31 BT.  
A juniper, 6 ins. in diam., brs. S.  $8^{\circ}$  W., 160 lks. dist., marked  $\frac{1}{4}$  S 36 BT.  
Descend 610 ft., over broken N. slope.  
64.00 Canyon, course NE., thence over SE. slope.  
71.00 Gulch, course SE.  
Ascend 250 ft., over S. slope, to  
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 16 ins. in the ground to bed rock, supported in a mound of stone, for cor. of secs. 25, 30, 31 and 36, marked on brass cap,

T7S  
 R18E | R19E  
 S25 | S30  
 S36 | S31  
 1924

from which,

An oak, 12 ins. in diam., brs. S.  $35^{\circ}$  E., 63 lks. dist., marked T7S R19E S31 BT.  
An oak, 8 ins. in diam., brs. S.  $26\frac{1}{2}^{\circ}$  W., 87 lks. dist., marked T7S R18E S36 BT.  
An oak, 14 ins. in diam., brs. N.  $70^{\circ}$  W., 70 lks. dist., marked T7S R18E S25 BT.  
No other bearing tree available.  
Land, mountainous;  
Soil, rocky, 4th rate.  
Timber, oak and juniper.  
Undergrowth, greasewood and yucca.

North, on true line, bet. secs. 25 and 30.  
Over mountainous land, thru. scattering timber and undergrowth. Asc. 180 ft., over S. slope.  
7.00 Spur, slopes SE. Desc. 320 ft. over NE. slope.  
16.00 Old wagon road, brs. NW. and SE.  
16.50 Gulch, course E., along SE. slope.  
18.80 Same old road, brs. SE. and SW.  
25.80 Same old road, brs. NW. and SE.  
34.00 Ravine, course E. Asc. 80 ft., over SE. slope, to  
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 15 ins. in the ground to bed rock, supported in a mound of stone, for  $\frac{1}{4}$  sec. cor. of secs. 25 and 30, marked on brass cap,

$\frac{1}{4}$   
 S25 | S30  
 1924

from which,

An oak, 20 ins. in diam., brs. N.  $72^{\circ}$  E., 162 lks. dist., marked  $\frac{1}{4}$  S 30 BT.

## Survey of the E. bdy. of Township 7 South, Range 18 East.

9

Chains.

An oak, 20 ins. in diam., brs. N. 16° W., 160 lks. +  
dist., marked  $\frac{1}{4}$  S 25 BT.  
Ascend 25 ft., over S. slope.  
42.40 Spur, slopes NE. Desc. 480 ft., over N. slope.  
42.50 Bend in road, brs. NW. and SW.  
50.00 Enter gully, course N. and follow down same, descending  
213 ft.  
71.50 Forks of gully from the S. and wash from the W., course NE.  
Ascend 80 ft., over SE. slope, to  
80.00 Set an iron post 3 ft. long, 2 ins. in diam., 6 ins. in the  
ground to bed rock, deposit a stone marked with a  
cross (x) at base of post, and raise a mound of stone  
around post, for cor. of secs. 19, 24, 25 and 30, marked  
on brass cap,

T7S	
R18E	R19E
S24	S19
S25	S30
1924	

from which,

An oak, 16 ins. in diam., brs. S. 44° E., 130 lks.  
dist., marked T7S R19E S30 BT.

No other trees available.

Land, mountainous.

Soil, rocky, sandy and granite formation, 3rd and 4th rate.

Timber, oak and juniper.

Undergrowth, greasewood and yucca.

North, on true line, bet. secs. 19 and 24.  
Over mountainous land, thru. scattering timber and under-  
growth. Asc. 20 ft., over SE. slope.  
9.60 Spur, slopes E. from SW. Desc. 200 ft., over N. slope.  
9.80 Wire fence brs. NE. and SW.  
24.00 Ravine, course NE. Desc. 95 ft., over NE. slope, to  
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the  
ground to bed rock, supported in a mound of stone, for  
 $\frac{1}{4}$  sec. cor. of secs. 19 and 24, marked on brass cap,

$\frac{1}{4}$	
S24	S19
1924	

from which,

An oak, 16 ins. in diam., brs. N. 33° E., 108 lks.  
dist., marked  $\frac{1}{4}$  S 19 BT.

An oak, 10 ins. in diam., brs. N. 53° W., 106 lks.  
dist., marked  $\frac{1}{4}$  S 24 BT.

From this cor., Wise's house brs. N. 27° E.

Descend 165 ft., over NE. slope.

41.80 Wire fence, brs. E. and W.

42.60 Wash, 15 lks. wide, course E. Asc. 320 ft., over S. slope.

67.70 Wise's house brs. S. 19° 32' E.

68.20 Spur, slopes N. 65° E. Desc. 240 ft., over NW. slope, to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the  
ground to bedrock, deposit a stone marked with a cross  
(x) at base of post, and raise a mound of stone around  
post, for cor. of secs. 13, 18, 19 and 24, marked on brass  
cap,

T7S	
R18E	R19E
S13	S18
S24	S19
1924	

from which,

A cedar, 14 ins. in diam., brs. S. 35° W., 20  
lks. dist., marked T7S R18E S24 BT.

No other bearing trees available.

Land, mountainous.

Soil, rocky and sandy, 3rd and 4th rate.

Timber, oak and juniper.

Undergrowth, greasewood, yucca and cactus.

BOOK 3704

10 Survey of East boundary of Township 7 South, Range 18 East.

Chains.

North, on true line, bet. secs. 13 and 18.  
 Over mountainous land, thru scattering timber and undergrowth. Desc. 65 ft., over NW. slope.  
 3.00 Ravine, course NE. Asc. 550 ft., over SE. slope.  
 29.80 Spur, slopes NE. Desc. 225 ft., over N. slope, to  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bed rock, supported in a mound of stone, for  $\frac{1}{4}$  sec. cor. of secs. 13 and 18, marked on brass cap,  

$$\begin{array}{c} \frac{1}{4} \\ \text{S13} | \text{S18} \\ 1924 \end{array}$$
 from which,  
 A cedar, 6 ins. in diam., brs. S. 10° W., 315 lks. dist., marked  $\frac{1}{4}$  S13 BT.  
 An oak, 8 ins. in diam., brs. N. 8 $\frac{1}{4}$ ° E., 254 lks. dist., marked  $\frac{1}{4}$  S 18 BT.  
 Descend 120 ft., over NW. slope.  
 47.00 Ravine, course NE.  
 51.30 Same ravine, course NW., thence along W. slope.  
 65.30 Enter same ravine, from SW., course N. 10° E.  
 68.80 Leave same wash, course N. 20° E. Asc. 40 ft., over SE. slope, to  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bed rock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone, around post for cor. of secs. 7, 12, 13 and 18, marked on brass cap,

$$\begin{array}{c} \text{T7S} \\ \text{R18E} | \text{R19E} \\ \text{S12} | \text{S 7} \\ \text{S13} | \text{S18} \\ 1924 \end{array}$$

No bearing trees available.  
 Land, mountainous.  
 Soil, rocky, 3rd rate.  
 Timber, oak, juniper, and cedar.  
 Undergrowth, scrub mesquite, catclaw, scrub oak and cactus.

North, on true line, bet. secs. 7 and 12.  
 Over mountainous land, thru scattering timber and undergrowth.  
 Ascend 100 ft., over SE. slope.  
 9.80 Spur, slopes NE. Desc. 525 ft., over NW. slope.  
 35.50 Thence along W. slope, to  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 15 ins. in the ground to bed rock, supported in a mound of stone, for  $\frac{1}{4}$  sec. cor. of secs. 7 and 12, marked on brass cap,

$$\begin{array}{c} \frac{1}{4} \\ \text{S12} | \text{S 7} \\ 1924 \end{array}$$

from which,  
 A cedar, 8 ins. in diam., brs. S. 16 $\frac{1}{2}$ ° E., 147 lks. dist., marked  $\frac{1}{4}$  S 7 BT.  
 A cedar, 12 ins. in diam., brs. N. 29° W., 111 lks. dist., marked  $\frac{1}{4}$  S 12 BT.  
 Thence along W. slope.  
 45.50 Descend 455 ft., over NW. slope.  
 58.70 Stream, 8 lks. wide, 8 ins. deep, course NE in Oak Grove Canyon. Asc. 300 ft., over SE. slope, to  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 22 ins. in the ground to bed rock, supported in a mound of stone, for cor. of secs. 1, 6, 7 and 12, marked on brass cap,

Chains.

T7S	
R18E	R19E
S 1	S 6
-----	
S12	S 7
1924	

from which,  
 A cedar, 8 ins. in diam., brs. N. 16° E., 79 lks.  
 dist., marked T7S R19E S6 BT.  
 A cedar, 8 ins. in diam., brs. S. 58° E., 469 lks.  
 dist., marked T7S R19E S7 BT.  
 A cedar, 6 ins. in diam., brs. S. 76° W., 182 lks.  
 dist., marked T7S R18E S12 BT.

No other bearing tree available.  
 Land, mountainous.  
 Soil, rocky, 3rd rate.  
 Timber, cedar and oak.  
 Undergrowth, scrub mesquite, catclaw, scrub oak and cactus.

9.40  
 25.00  
 40.00

North, on true line, bet. secs. 1 and 6.  
 Over mountainous land, thru. scattering timber and under-  
 growth. Asc. 85 ft., over SE. slope.  
 Spur, slopes NE.; thence along E. slope.  
 Ascend 142 ft., over broken SE. slope, to  
 Set an iron post, 3 ft. long, 1 in. in diam., over a cross  
 (x) on surface rock, and raise a mound of stone around  
 post, for  $\frac{1}{4}$  sec. cor. of secs. 1 and 6, marked on brass  
 cap,

+	
S 1	S 6
-----	
1924	

42.50  
 48.50  
 58.30  
 60.00  
 63.50  
 71.70  
 80.80  
 86.02

No bearing trees available. Thence along W. slope.  
 Descend 173 ft., over NW. slope.  
 Short ravine, course NW. Asc. 90 ft., over SW. slope.  
 Thence along W. slope.  
 Descend 126 ft., over N. slope.  
 Ravine, course W. Asc. 90 ft., over S. slope.  
 Descend along W. slope.  
 Short spur, slopes N. 64° W. Desc. 91 ft., to  
 Intersect S. bdy. of T. 6 S., R. 19 E., surveyed due West, as  
 described in Book "J" of this group. At this point of  
 intersection,  
 Set an iron post, 3 ft. long, 3 ins. in diam., over a cross  
 (x) on surface rock, and raise a mound of stone around  
 post, for cor. of Ts. 6 and 7 S., Rs. 18 and 19 E., marked  
 on brass cap,

T6S	
R18E	R19E
S36	S31
-----	
S 1	S 6
T7S	
1924	

from which,  
 A cedar, 5 ins. in diam., brs. N. 84° E., 47 lks.  
 dist., marked T6S R19E S31 BT.  
 A cedar, 10 ins. in diam., brs. S. 51° E., 305 lks.  
 dist., marked T7S R19E S6 BT.  
 A cedar, 10 ins. in diam., brs. S. 87° W., 281 lks.  
 dist., marked T7S R18E S1 BT.  
 A cedar, 5 ins. in diam., brs. N. 21° W., 108 lks.  
 dist., marked T6S R18E S36 BT.

Land, mountainous.  
 Soil, rocky, 3rd rate.  
 Timber, cedar and oak.  
 Undergrowth, scrub mesquite, catclaw, scrub oak and cactus.

12 Survey of North boundary of Township 7 South, Range 18 East.

Chains.

From cor. of Ts. 6 and 7 S., Rs. 18 and 19 E., hereinbefore described,

West, on a true line, bet. secs. 1 and 36.

Over mountainous land, thru scattering timber and undergrowth.

Descend 160 ft., over NW slope.

8.80 Canyon, with wash, 30 lks. wide, in bottom, course NE.

Ascend rocky E. slope, 150 ft.

16.00 Spur, slopes N. 65° E. Desc. 130 ft., over NW slope.

22.30 Canyon; course NE. Asc. SE. slope, 235 ft.

38.50 Spur, slopes SE. Desc. 55 ft., over SW slope, to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bed rock, supported in a mound of stone, for  $\frac{1}{4}$  sec. cor. of secs. 1 and 36, marked on brass cap,

$\frac{1}{4}$  S 36  
S 1  
1924

from which,

A pinyon, 12 ins. in diam., brs. N. 85 $\frac{1}{2}$ ° W., 241 lks. dist., marked  $\frac{1}{4}$  S 36 BT.

A pinyon, 8 ins. in diam., brs. S. 74 $\frac{1}{4}$ ° E., 178 lks. dist., marked  $\frac{1}{4}$  S 1 BT.

Descend 30 ft., over SW slope.

42.70 Enter ravine, course S. 70° E.

50.00 Leave ravine, course S. 80° E. Asc. 215 ft., over SE slope.

56.00 East side of top of ridge, brs. N. and S.; thence across same,

72.00 Descend 360 ft., over broken SW slope, to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bed rock, supported in a mound of stone, for cor. of secs. 1, 2, 35 and 36, marked on brass cap,

T6S | R18E  
S35 | S36  
S 2 | S 1  
T7S  
1924

from which,

A cedar, 30 ins. in diam., brs. S. 24 $\frac{3}{4}$ ° E., 28 lks. dist., marked T7S R18E S1 BT.

A catclaw, 5 ins. in diam., brs. S. 78° E., 42 lks. dist., marked T7S R18E S1 BT.

A cedar, 8 ins. in diam., brs. S. 7 $\frac{1}{2}$ ° W., 50 lks. dist., marked T7S R18E S2 BT.

A cedar, 24 ins. in diam., brs. N. 47° W., 8 lks. dist., marked T6S R18E S35 BT.

Land, mountainous.

Soil, rocky, 3rd rate.

Timber, cedar, catclaw and pinyon.

Undergrowth, scrub mesquite, catclaw, scrub oak and mahogany.

West, on true line, bet. secs. 2 and 35.

Over heavily rolling land, thru scattering timber and undergrowth.

Descend 30 ft., over W. slope.

1.50 Parsons Canyon, course N. 65° E.

Ascend 134 ft., over SE slope, to

14.50 Thence over gently rolling mesa.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 2 and 35, marked on brass cap,


$\frac{1}{4}$  S 35  
S 2  
1924

Survey of the N. bdy. of T7S, R18E.

BOOK 3704

Chains.

46.60 Continue over mesa.  
 51.70 Enter mountainous land. Desc. broken W. slope, 195 ft.  
 57.00 Ravine, course N.; asc 165 ft. over E. slope.  
 75.50 Spur, slopes N.; desc. 250 ft. over SW. slope.  
 80.00 Canyon, course N.; asc. 120 ft. over NE. slope, to  
 Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the  
 ground, for cor. of secs. 2, 3, 34, and 35, marked on  
 brass cap.




1924

from which  
 A cedar, 4 ins. dia., brs N.19°E., 19 lks. dist.,  
 marked T6S R18E S35 BT.  
 A pinyon, 5 ins. dia., brs S.1°E., 36 lks. dist.,  
 marked T7S R18E S2 BT.  
 A pinyon, 6 ins. dia., brs S.81½°W., 16 lks. dist.,  
 marked T7S R18E S3 BT.  
 A cedar, 20 ins. dia., brs N.25°W., 72 lks. dist.,  
 marked T6S R18E S3 BT.


Land, heavily and gently rolling, and mountainous.  
 Soil, rocky, 3rd rate.  
 Timber, pinyon, cedar, and scrub oak.  
 Undergrowth, mesquite, catclaw, palo verde, greasewood,  
 and c acti.

West on true line bet. secs. 3 and 34.  
 Over mountainous land, through scattering timber  
 and undergrowth  
 Desc. 150 ft. over NW. slope.  
 2.50 Canyon, course N.24°E.; asc. 150 ft. over SE. slope.  
 10.00 Flat topped spur, slopes NE.  
 27.00 Desc. 195 ft. over NW. slope.  
 34.10 Ravine, course N.; asc. 150 ft. over E. slope, to  
 40.00 Set an iron post, 3 ft. long, 1 in. dia., on bed rock,  
 in mound of stone, for ¼ sec. cor., marked on brass cap



Deposit stone marked cross (X) at base of post.  
 No bearing trees available.  
 Across rolling spur, sloping N.

47.80 Desc. 280 ft. over W. slope.  
 53.00 Virgus Canyon, with stream of water, 1 lks. wide, course  
 NE.  
 Asc. 90 ft. over NE. slope.  
 61.00 Short spur, slopes N.; desc. 80 ft. over NW. slope.  
 66.90 Virgus Canyon, course NE.; asc. 320 ft. over SE. slope, to  
 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 18 ins. in  
 the ground, on bed rock, in mound of stone, for cor. of  
 secs. 3, 4, 33, and 34, marked on brass cap



from which  
 A cedar, 10 ins. dia., brs S.14°E., 369 lks. dist.,  
 marked T6S R18E S3 BT.

## Chains.

No other trees available.  
 Land, mountainous.  
 Soil, sandy 3rd rate.  
 Timber, scattering cedar.  
 Undergrowth, mesquite, cat claw, greasewood, and cacti.

West on true line bet. secs. 4 and 33.  
 Over mountainous land, through scattering timber and undergrowth.

Asc. 85 ft. over SE. slope.

8.00 Across mesa.

27.00 Desc. 115 ft. over SW. slope, to

40.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$  S33

S 4

1924

Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.  
 No bearing trees available.

Desc. slightly over gentle SW. slope.

44.30 Wash, 5 lks. wide, course NW.; asc. 25 ft. over NE. slope.

55.00 Thence along N. slope.

56.90 Desc. 165 ft. over NW. slope.

60.90 Canyon, course NE., with stream of water in bottom, 8 lks. wide, course NE.; asc. 215 ft. over SE. slope.

72.50 Spur, slopes NE.; desc. 185 ft. over SW. slope, to

80.00 Set an iron post, 3 ft. long, 2 ins. dia., 6 ins. in the ground, on bed rock, in mound of stone, for cor. of secs. 4, 5, 32, and 33, marked on brass cap

T6S R18E

S32 | S33

S 5 | S 4

T7S

1924

from which

A pinyon, 12 ins. dia., br's S.  $4\frac{1}{2}^{\circ}$  W., 198 lks. dist., marked T7S R18E S5 BT.

No other bearing trees available.

Land, mountainous.

Soil, rocky 3rd rate.

Timber, scattering pinyon.

Undergrowth, mesquite, catclaw, palo verde, and cacti.

West on true line bet. secs. 5 and 32.

Over mountainous land, through scattering timber and undergrowth.

Desc. 55 ft. over SW. slope.

1.70 Ravine, course N., with stream of water, 5 lks. wide, 4 ins. deep, course N.; asc. 115 ft. over E. slope.

7.00 Low spur, slopes N.; thence across top of same.

16.00 Desc. 25 ft. over NW. slope.

18.00 Short ravine, course N.

21.80 Ravine, course NE.; asc. 115 ft. over E. slope.

39.00 Flat topped ridge, br's NW. and SE.

40.00 Set an iron post, 3 ft. long, 1 in. dia., 18 ins. in the ground, on bed rock, in mound of stone, for  $\frac{1}{4}$  sec. cor. marked on brass cap

$\frac{1}{4}$  S32

S 5

1924



Chains.

44.00 Deposit stone marked cross (X) at base of post.  
 Across top of ridge.  
 75.00 Desc. 200 ft. over SW. slope.  
 80.00 Draw, course S.; asc. 85 ft. over SE. slope, to  
 Set an iron post, 3 ft. long, 2 ins. dia., 10 ins. in  
 the ground, on bed rock, in mound of stone, for cor. of  
 secs. 5, 6, 31 and 32, marked on brass cap.

T6S	R18E
S31	S32
S 6	S 5
T7S	R18E

1924

from which  
 A cedar, 6 ins. dia., brs S.85 $\frac{1}{2}$ °E., 119 lks. dist.,  
 marked T7S R18E S5 BT.  
 No other trees available.

Land, mountainous.  
 Soil, rocky 3rd rate.  
 Timber, scattering cedar.  
 Undergrowth, mesquite, catclaw, scrub oak and cacti.

West on true line bet. secs. 6 and 31.  
 Over mountainous land, through scattering timber and  
 undergrowth.

Asc. 15 ft over SE. slope.  
 2.00 Along S. slope  
 16.00 Desc. 425 ft. over broken SW. slope.  
 38.50 Oak Spring Gulch, with stream of water, in bottom, 10 lks.  
 8 wide, 3 ins. deep, course NW.; thence across flat.

40.00 Set an iron post, 3 ft. long, 1 in. dia., 20 ins. in  
 the ground, on bed rock, in mound of stone, for  $\frac{1}{4}$   
 sec. cor., marked on brass cap

$\frac{1}{4}$ S31
S 6

1924

from which  
 A buck thorn, 4 ins. dia., brs N.75°E., 23 lks. dist.,  
 marked  $\frac{1}{4}$  S31 BT.  
 A scrub oak, 4 ins. dia., brs S.52°W., 48 lks. dist.,  
 marked  $\frac{1}{4}$  S6 BT.

Continue across flat.

42.00 Asc. 170 ft. over NE. slope.  
 47.62 Wire fence, brs NE. and SW.  
 48.00 Short spur, slopes N.; desc. 100 ft. over NW. slope.  
 57.00 Draw, course N.; asc. 100 ft. over E. slope.  
 63.60 Thence along N. slope over broken land.

86.40 Intersect the range line surveyed due north as hereinbefore  
 described. At point of intersection, set an iron post  
 3 ft. long, 3 ins. dia., 27 ins. in the ground, for  
 cor. of Tps. 6 and 7 S., R. 18 E., marked on brass cap

T6S	S31	R18E
R17E	S36	S 6
T7S		

1924 No bearing trees available.

Raise mound of stone, 3 ft. base, 2 ft. high, E. of cor.  
 Land, mountainous.  
 Soil, sandy, 3rd rate.  
 Timber, scattering oak and buck thorn  
 Undergrowth, mesquite, catclaw, palo verde, and cacti.

Boundaries of T7S, R18E							
Latitudes, departures and closing errors							
Line Designated	True Bearing	Distance	Latitudes		Departures		
			N	S	E	W	
S. bdy. of Tp.	N.89°53'W.	487.00	.98			487.00	
W. bdy. of Tp.	North	484.94	484.94				
N. bdy. of Tp.	East	486.46			486.46		
E. bdy. of Tp.	South	486.02		486.02			
Convergency					.47		
<u>Totals</u>			485.92	486.02	486.93	487.00	
				485.92		486.93	
			Error in lat.---		0.10		
			Error in dep.---		0.07		

Chains from cor. of secs. 1, 2, 35 and 36, on S. bdy. of Tp., described in Book "F" of this group, N.0°01'W., bet. secs. 35 and 36.

Over mountainous land, through scattering timber and undergrowth.

Asc. 400 ft. over precipitous cliffs.

11.00 Spur, slopes SE.; desc. 180 ft. over NE. slope.

34.20 Small canyon, course SE.; asc. 130 ft. over S. slope, to

40.00 Set an iron post, 3 ft. long, 1 in. dia., 6 ins. in the ground, on bed rock, in mound of stone, for 1/4 sec. cor., marked on brass cap

1/4

S35 | S36

1924

Deposit stone marked cross (X) at base of post.

No bearing trees available.

Asc. 230 ft. over S. slope.

52.00 Ridge, brs N.70°E. and S.70°W.; desc. 340 ft. over NW. slope.

63.00 Small canyon, course NW.; asc. 100 ft. over SW. slope.

70.40 Short spur, slopes W.; desc. 100 ft. over NW. slope.

74.00 Gully, course W.; asc. 120 ft. over SW. slope

79.50 Short spur, slopes W.; desc. slightly to

80.00 Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the ground, for cor. of secs. 25, 26, 35, and 36, marked on brass cap

T7S | R18E

S26 | S25

S35 | S36

1924

from which

An oak, 10 ins. dia., brs N.55 1/2°E., 353 lks. dist., marked T7S R18E S25 BT.

An oak, 8 ins dia., brs S.77°E., 276 lks. dist., marked T7S R18E S36 BT.

An oak, 12 ins. dia., brs S.82°W., 250 lks. dist., marked T7S R18E S35 BT.

An oak, 14 ins. dia., brs N.27 1/2°W., 432 lks. dist., marked T7S R18E S26 BT.

Land, mountainous.

Soil, rocky 4th rate.

Timber, scattering oak and juniper.

Undergrowth, greasewood, and yucca.

S.89°53'E., on random line bet. secs. 25 and 36.

40.00 Set temp. 1/4 sec. cor.

80.20 Intersect the E. bdy. of the Tp., 7 lks. S. of the cor. of secs. 25, 30, 31, and 36, hereinbefore described.

Thence

N.89°56'W., on true line bet. secs. 25 and 36.

Over mountainous land, through scattering timber and undergrowth.

Asc. 380 ft. over E. slope, to

40.10 Set an iron post, 3 ft. long, 1 in. dia., 20 ins. in the ground, on bed rock, in mound of stone, for 1/4 sec. cor., marked on brass cap

1/4 S25

S36


1924

Chains.


from which  
 A juniper, 6 ins. dia., brs N.78½°E., 162 lks. dist.,  
 marked ¼ S25 BT.  
 An oak, 4 ins. dia., brs S.85¼°W., 50 lks. dist.,  
 marked ¼ S36 BT.  
 Asc. 210 ft. over SE. slope.  
 48.70 Ridge, brs NE. and SW.; desc. 190 ft. over NW. slope.  
 60.70 Gully, course N.; asc. 290 ft. over E. slope.  
 68.80 Spur, slopes N.; desc. 340 ft. over NW. slope.  
 80.20 The cor. of secs. 25, 26, 35, and 36.

Land, mountainous.  
 Soil, rocky and gravelly, 3rd and 4th rate.  
 Timber, oak and juniper.  
 Undergrowth, greasewood and yucca.

N.0°01'W., bet. secs. 25 and 26.  
 Over mountainous land, through scattering timber and  
 undergrowth.  
 Asc. 45 ft. over SE. slope.  
 6.40 Spur, slopes NW.; desc. 110 ft. over NW. slope.  
 14.70 Desc. N. slope 190 ft.  
 21.20 Thence along E. slope.  
 26.20 Spur, slopes NE.; desc. 175 ft. over NW. slope.  
 40.00 Set an iron post, 3 ft. long, 1 in. dia., 16 ins. in the  
 ground, on bed rock, in mound of stone, for ¼ sec cor.  
 marked on brass cap



from which  
 An oak, 14 ins. dia.; brs S.14°E., 75 lks. dist.,  
 marked ¼ S25 BT.  
 No other tree available.  
 Desc. 75 ft. over NW. slope.  
 43.60 Ravine, course NE.; asc. 125 ft. over SE. slope.  
 51.60 Along E. slope.  
 53.50 Desc. 210 ft. over NE. slope.  
 61.90 Ravine, course N.64°E.; asc. 190 ft. over SE. slope.  
 67.90 Farm house brs East, about 15 chs. dist.  
 69.10 Spur, slopes E.; desc. 160 ft. over NE. slope.  
 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 12 ins. in the  
 ground, on bed rock, in mound of stone, for cor. of  
 secs. 23, 24, 25, and 26, marked on brass cap



1924

from which  
 A live oak, 12 ins. dia., brs N.15° E., 17 lks. dist.,  
 marked T7S R18E S24 BT.  
 A live oak, 8 ins. dia., brs S.26¼° E., 56 lks. dist.,  
 marked T7S R18E S25 BT.  
 A live oak, 10 ins. dia., brs S.42½°W., 206 lks. dist.,  
 marked T7S R18E S26 BT.  
 A live oak, 8 ins. dia., brs N.88½°W., 208 lks. dist.,  
 marked T7S R18E S23 BT.

Land, mountainous.  
 Soil, sandy and rocky, 3rd rate.  
 Timber, cedar and live oak.  
 Undergrowth, mesquite, catclaw, scrub oak, and cacti.

Survey of the Subdivisions of T7S R18E.

Chains.

S. 89°56'E., on random line bet. secs. 24 and 25..

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.30 Intersect the E. bdy. of the Tp., 7 lks. N. of the cor. of secs. 19, 24, 25, and 30, hereinbefore described.

Thence

N. 89°53'W., on true line bet. secs. 24 and 25.

Over mountainous land, through scattering timber and undergrowth. Asc. 510 ft., over SE. slope.

23.80 Ridge, 5 brs. NW. and SE. Spurs slopes NE. from ridge, at this point

35.85 Spur, slopes NW. Desc. broken SW. slope, 186 ft. tot.

40.15 Set an iron post, 3 ft. long, 1 in. dia., 10 ins. in the ground, on bed rock, in mound of stone, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$  S24  
S25  
1924

from which

An oak, 8 ins. dia., brs N. 64°E., 419 lks. dist., marked  $\frac{1}{4}$  S24 BT.

A cedar, 10 ins. dia., brs S. 33 $\frac{1}{4}$ °W., 150 lks. dist., marked  $\frac{1}{4}$  S25 BT.

Desc. 150 ft. over SW. slope.

54.30 Ravine, course N., with stream of water, 3 lks. wide, 3 ins. deep, course N.; asc. 260 ft. over E. slope.

66.40 Blake's Green house brs S. 26°40'W.

66.50 Spur, slopes N. 20°W.; desc. 250 ft. over SW. slope.

76.70 Ravine, course N.; asc. 90 ft. over NE. slope, to

80.30 The cor. of secs. 23, 24, 25, and 26.

Land, mountainous.

Soil, sandy and rocky, 3rd rate.

Timber, oak and cedar.

Undergrowth, mesquite, cat claw, scrub oak, and cacti.

N. 0°01'W., bet. secs. 23 and 24.

Over mountainous land, through scattering timber and undergrowth.

Desc. 75 ft. over NE. slope.

5.00 Ravine, course NW.; asc. 20 ft. over SW. slope.

15.10 Desc. 60 ft. over NW. slope.

18.80 Wash, 30 lks. wide, course NE.; asc. 130 ft. over SE. slope.

24.10 Old road, brs NE. to Klondyke and SW. to Table mountain mine.

28.00 Spur, slopes E.; desc. 75 ft. over NE. slope, to

33.00 Wash, 30 lks. wide, course NW.; asc. 110 ft. over SW. slope

40.00 Set an iron post, 3 ft. long, 1 in. dia., 12 ins. in the ground, on bed rock, in mound of stone, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$   
S23 | S24  
1924

from which

A live oak, 10 ins. dia., brs S. 57 $\frac{1}{2}$ °W., 228 lks. dist., marked  $\frac{1}{4}$  S23 BT.

No other tree available.

Asc. 225 ft. over SW. slope.

52.50 Thence along rolling W. slope.

67.00 Spur, slopes NW.; desc. 90 ft. over NE. slope.

78.60 Head of short ravine, course S. 65°E.; asc. 10 ft. over SE. slope, to

80.00 Set an iron post, 3 ft. long, 2 ins. dia., 18 ins. in the ground, on bed rock, in mound of stone, for cor. of secs. 13, 14, 23, and 24, marked on brass cap

Chains

T7S	R18E
S14	S13
S23	S24

1924

Deposit stone marked cross (X) at base of post.

No bearing trees suitable.

Land, mountainous.

Soil, sandy, 3rd rate.

Timber, scattering oak and juniper.

Undergrowth, mesquite, catclaw, scrub oak and cacti.

S.89°53'E., on random line bet. secs. 13 and 24.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.12 Intersect the E. bdy. of the Tp., 14 lks. N. of the cor. of secs. 13, 18, 19, and 24, hereinbefore described.

Thence

N.89°47'W., on true line bet. secs. 13 and 24.

Over mountainous land, through scattering timber and undergrowth.

Desc. 15 ft. over NW. slope.

5.00 Ravine, course NE.; asc. 175 ft. over NE. slope.

15.10 Spur, slopes N.; desc. 210 ft. over NW. slope.

28.80 Ravine, course N.; asc. 50 ft. over NE. slope.

35.10 Spur, slopes N.; desc. 50 ft. over NW. slope.

38.70 Ravine, course NE.; asc. 30 ft. over SE. slope, to

40.06 Set an iron post, 3 ft. long, 1 in. dia., on bed rock, in mound of stone, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$ S13
S24

1924

from which

A cedar, 6 ins. dia., brs N.25°W., 128 lks. dist., marked  $\frac{1}{4}$  S13 BT.A cedar, 10 ins. dia., brs S.70 $\frac{1}{2}$ °E., 284 lks. dist., marked  $\frac{1}{4}$  S24 BT.

Asc. 10 ft. over SE. slope.

41.10 Short spru, slopes NE.; desc. NW. slope slightly.

44.80 Ravine, with stream of water in bottom 2 lks. wide, course NE.; asc. 339 ft. over broken SE. slope, to

80.12 The cor. of secs. 13, 14, 23, and 24.

Land, mountainous.

Soil, rocky and sandy, 3rd rate.

Timber, scattering cedar and oak.

Undergrowth, mesquite, catclaw, scrub oak, and cacti.

N.0°01'W., bet. secs. 13 and 14.

Over mountainous land, through scattering timber and undergrowth.

Asc. 45 ft. over SE. slope.


3.40 Spur, slopes N.20°E.; asc. 110 ft. over SE. slope.

27.00 Spur, slopes E.; desc. 250 ft. over NE. slope, to  $\frac{1}{4}$  sec. cor.

28.67 Wooten's house in canyon, brs S.85°40'W.


40.00 Set an iron post, 3 ft. long, 1 in. dia., 18 ins. in the ground, on bed rock, in mound of stone, for  $\frac{1}{4}$  sec. cor., marked on brass cap

Chains



1924

Deposit stone marked cross (X) at base of post.  
 No bearing trees available.  
 Desc. 130 ft. over NE. slope.  
 58.70 Ravine, course E.; asc. 230 ft. over S. slope.  
 72.70 Spur, slopes N60°E.; desc. 90 ft. over N. slope, to  
 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 12 ins. in the  
 ground, on bed rock, in mound of stone, for cor. of secs  
 11, 12, 13, and 14, marked on brass cap.




1924

from which

- An oak, 14 ins. dia., brs N.78°E., 138 lks. dist.,  
marked T7S R18E S12 BT.
- An oak, 12 ins. dia., brs S.58°E., 92 lks. dist.,  
marked T7S R18E S13 BT.
- A live oak, 6 ins. dia., brs S.60 $\frac{1}{2}$ °W., 123 lks. dist.,  
marked T7S R18E S14 BT.
- A live oak, 10 ins. dia., brs N.64 $\frac{1}{2}$ °W., 123 lks. dist.,  
marked T7S R18E S11 BT.

Land, mountainous.  
 Soil, rocky and sandy, 3rd and 4th rate.  
 Timber, scattering oak and juniper.  
 Undergrowth, scrub oak, mahogany, cat claw, mesquite,  
 and cacti.

40.00 S.89°47'E., on random line bet. secs. 12 and 13.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.38 Intersect the cor. of secs. 7, 12, 13, and 18, on the E.  
 bdy of the Tp., hereinbefore described.  
 Thence  
 N.89°47'W., on true line bet. secs. 12 and 13.  
 Over mountainous land, through scattering timber and  
 undergrowth.  
 Asc. 135 ft. over SE. slope.  
 6.40 Spur, slopes NE.; desc. 185 ft. over W. slope.  
 17.66 Head of canyon, course N.; asc. 210 ft. over SE. slope.  
 26.90 Spur, slopes N.20°E.; desc. 200 ft. over broken W. slope.  
 27.05 Monument of stone, 5 ft. base, 4 ft. high, marking  
 bdy. line between Pinal-Graham counties, brs. N. 15 lks.  
 dist.  
 37.90 Oak Grove Canyon, with stream, of water, 3 lks. wide, course  
 NE. Asc. slightly over SE. slope, to  
 40.19 Set an iron post, 3 ft. long, 1 in. dia., 18 ins. in the  
 ground, on bed rock, in mound of stone, for  $\frac{1}{4}$  sec. cor.,  
 marked on brass cap



- from which
  - A live oak, 12 ins. dia., brs S.22°E., 139 lks. dist.,  
marked  $\frac{1}{4}$  S13 BT.
  - A cedar, 12 ins. dia., brs N.15°E., 96 lks. dist.,  
marked  $\frac{1}{4}$  S12 BT.
- Asc. 145 ft. over SE. slope.  
 46.30 Spur, slopes NE.; desc. 55 ft. over NW. slope.  
 Wire fence, brs NE. and SW.

Survey of the Subdivisons of T7S, R18E

BOOK 3704

22

Chains.

49.90 Wash, 30 lks. wide, course NW.; asc. 252 ft. over SE. slope  
 63.40 Spur, slopes NE.; thence along broken N. slope, to

80.38 The cor. of secs. 11, 12, 13, and 14.  
 Land, mountainous.  
 Soil, sandy and rocky, 3rd rate.  
 Timber, scrub oak and pinyon, and juniper.  
 Undergrowth, mesquite, matclaw, cacti, and mahogany.

N.0°01'W. bet. secs. 11 and 12.  
 Over rolling land, through scattering timber and undergrowth.

36.00 Desc. 60 ft. over N. slope.  
 40.00 Desc. 20 ft. over NW. slope.

40.00 Set an iron post, 3 ft. long, 1 in. dia., 14 ins. in the ground, on bed rock, in mound of stone, for  $\frac{1}{4}$  sec. cor., marked on brass cap.

S11 | S12

1924

from which

A scrub oak, 5 ins. dia., brs N.77°E., 188 lks. dist., marked  $\frac{1}{4}$  S12 BT.

A cedar, 6 ins. dia., brs N.6 $\frac{1}{4}$ °W., 178 lks. dist., marked  $\frac{1}{4}$  S11 BT.

Desc. 45 ft. over NW. slope.

43.20 Wire Corral Draw, course NE. Asc. 70 ft., over SE. slope, to  
 70.20 Asc. 140 ft. over S. slope, to

80.00 Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground, on bed rock, in mound of stone, for cor. of secs. 1, 2, 11, and 12., marked on brass cap.

T7S R18E

S 2 | S 1

S11 | S12

1924

from which

A mesquite, 12 ins. dia., brs N.80°E., 23 lks. dist., marked T7S R18E S1 BT.

A mesquite, 6 ins. dia., brs S.42°W., 60 lks. dist., marked T7S R18E S11 BT.

A mesquite, 8 ins. dia., brs. N.46°W., 328 lks. dist., marked T7S R18E S2 BT.

No other tree available.

Land, rolling, and mountainous.

Soil, sandy, 3rd rate.

Timber, scattering oak and juniper, and mesquite.

Undergrowth, mesquite, manzanita, cacti, catclaw.

40.00 S.89°47'E., on random line bet. secs. 1 and 12.  
 Set temp.  $\frac{1}{4}$  sec. cor.

80.30 Intersect the E. bdy. of the Tp., 14 lks. S. of the cor. of secs. 1, 6, 7, and 12., hereinbefore described.

Thence

N.89°53'W., on true line bet. secs. 1 and 12.



Survey of the Subdivisions of T7S, R18E.

BOOK 3704

23

Chains

Over mountainous land, through scattering timber and undergrowth. Asc. 200 ft., over E. slope.  
 12.30 Flat topped spur, slopes NE. Desc. 200 ft., over NW. slope.  
 26.70 Wire Corral Draw, 40 lks wide; course NE. ft. over W. slope  
 37.00 Ascend 140 ft. over SE. slope to asc. 140 ft. over E. slope  
 40.15 Set an iron post, 3 ft. long, 1 in. dia., on bed rock, in mound of stone, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$  S 1  
 S12  
 1924

from which

A mesquite, 8 ins. dia., brs S.56 $\frac{1}{2}$ °E., 112 lks. dist., marked  $\frac{1}{4}$  S12 BT.  
 A cat claw, 4 ins. dia., brs N.59 $\frac{1}{2}$ °W., 103 lks. dist., marked  $\frac{1}{4}$  S1 BT.

Asc. 20 ft. over SE. slope.  
 45.30 Low spur, slopes NE.; desc. 160 ft. over W. slope.  
 50.50 Ravine, course S.; asc. 295 ft. over SE. slope, to

80.30 The cor. of secs. 1, 2, 11, and 12.

Land, mountainous.  
 Soil, sandy and rocky, 3rd rate.  
 Timber, scattering mesquite, catclaw, and oak.  
 Undergrowth, mesquite, cacti, and catclaw.

N.0°01'W., on random line bet. secs. 1 and 2.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 86.08 Intersect the N. bdy. of the Tp., 42 lks. W. of the cor. of secs. 1, 2, 35, and 36.

Thence  
 S, 0°17'W., on true line bet. secs. 1 and 2.

Over mountainous land, through scattering timber and undergrowth.  
 Along W. slope.  
 5.68 E. edge of Parson's Canyon, from SW, course N.20°W; asc. 120 ft. over W. slope.

35.68 Parson's Canyon, course N.25°W.; asc. 280 ft. over S. slope.

40.00 End of spur, slopes NE.; desc. 180 ft. over SE. slope.

46.08 True point for  $\frac{1}{4}$  sec. cor. bet. secs. 1 and 2, falls on unsuitable place for permanent cor.

46.68 Set an iron post, 3 ft. long, 1 in. dia., on bed rock, in mound of stone, for witness to  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$   
 W | C  
 S 2 | S 1

1924

from which

A pinyon, 8 ins. dia., brs S.73°E., 48 lks. dist., marked  $\frac{1}{4}$  S1 WC BT.  
 A pinyon, 6 ins. dia., brs S.30°W., 169 lks. dist., marked  $\frac{1}{4}$  S2 WC BT.

Thence along E. slope.

51.07 Parson's Canyon, course NE.; asc. 200 ft. over N. slope.

70.50 Spur, slopes NE.; desc. S. slope.; desc. 100 ft. to

86.08 The cor. of secs. 1, 2, 11, and 12.

Land, mountainous.  
 Soil, sandy and rocky, 3rd rate.  
 Timber, pinyon and oak.  
 Undergrowth, mesquite, cacti, cat claw, and mahogany.

## Survey of Subdivisions of T7S, R18E.

BOOK 3704

24

Chains.

From the cor. of secs. 2, 3, 34, and 35, on the S. bdy. of Tp., described in Book "P" of this group, N.0°01'W., bet. secs. 34 and 35.  
Asc. 40 ft. over S. slope.  
2.60 Ravine, course SE.; asc. 50 ft. over SW. slope.  
Asc. broken SE. slope. 700 ft.

37.10 Ridge, brs SW. and NE.; desc. 50 ft. over N. slope.  
40.00 Set an iron post, 3 ft. long, 1 in. dia., 15 ins. in the ground, on bed rock, in mound of stone, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$   
S34 | S35

1924

Deposit stone marked cross (X) at base of post.  
No bearing trees available.  
Desc. 330 ft. over N. slope.  
50.00 Desc. 500 ft. over NE. slope.  
74.50 Ravine, course NW.; thence along NW. slope.; asc. slightly to cor.  
80.00 Set an iron post, 3 ft. long, 2 ins. dia., 14 ins. in the ground, on bed rock, in mound of stone, for cor. of secs. 26, 27, 34, and 35, marked on brass cap

T7S R18E  
S27 | S26  
S34 | S35

1924

from which  
An oak, 5 ins. dia., brs N.50°E., 51 lks. dist. marked T7S R18E S26 BT.  
A pinyon, 10 ins. dia., brs S.57 $\frac{1}{2}$ °E., 609 lks. dist., marked T7S R18E S35 BT.  
An oak, 8 ins. dia., brs S.4 $\frac{3}{4}$ °W., 430 lks. dist., marked T7S R18E S34 BT.  
A willow, 6 ins. dia., brs N.24 $\frac{3}{4}$ °W., 122 lks. dist.; marked T7S R18E S27 BT.

Land, mountainous.  
Soil, sandy and rocky, 3rd rate.  
Timber, scattering oak, pinyon, and willow  
Undergrowth, mesquite, cat claw, and cacti.

S.89°53'E., on random line bet. secs. 26 and 35.  
40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
79.94 Intersect the N. and S. line, 7 lks. S. of the cor. of secs. 25, 26, 35, and 36.

Thence  
N.89°56'W., on true line bet. secs. 26 and 35.  
Over mountainous land, through scattering timber and undergrowth.  
Desc. 400 ft. over W. slope.  
16.55 Ravine, with stream of water in bottom, 4 lks. wide, 4 ins. deep, course N.; asc. 110 ft. over NE. slope.  
26.50 Spur, slopes N.20°W.; desc. 120 ft. over W. slope.  
29.35 Ravine, course N.; asc. 175 ft. over NE. slope.  
39.97 Set an iron post, 3 ft. long, 1 in. dia.; 8 ins. in the ground, on bed rock, in mound of stone, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$  S26  
S35

1924

Survey of the Subdivisions of T7S, R18E.

BOOK 3704


Chains.

- Deposit stone marked cross (X) at base of post.
- No bearing trees available.
- 40.15 Spur, slopes N.20°W.; desc. 220 ft. over broken W. slope
- 49.10 Canyon, with stream of water in bottom, 4 lks. wide, 4 ins. deep, course NW.; asc. 195 ft. over NE. slope.
- 60.35 Ridge, brs NW. and SE.; desc. 400 ft. over NW. slope, to
- 79.94 The cor. of secs. 26, 27, 34, and 35.

Land, mountainous.  
 Soil, rocky and sandy, 3rd rate.  
 Timber, scattering pinyon, cedar and juniper.  
 Undergrowth, mesquite, cat claw, scrub oak, and cacti.

N.0°01'W., bet. secs. 26 and 27.  
 Over mountainous land, through scattering timber and undergrowth.


- .50 Desc. 20 ft. over N. slope.
- 25.00 Wash, 20 lks. wide, course W.; asc. 500 ft. over S. slope
- 37.80 Spur, slopes S. 65°W.; desc. 310 ft. over NW. slope.
- 40.00 Ravine, course NE.; asc. 100 ft. over SE. slope, to
- Set an iron post, 3 ft. long, 1 in. dia., 18 ins. in the ground, on bed rock, in mound of stone, for  $\frac{1}{4}$  sec. cor., marked on brass cap



1924

Deposit stone marked cross (X) at base of post.  
 No trees suitable for bearing trees.

- Asc. 110 ft. over SE. slope.
- 48.30 House with tin roof brs N.86°41'E., about 20.00 chs. dist.
- 48.50 Rocky spur, slopes E.; desc. 90 ft. over NE. slope.
- 52.40 Ravine, course E.; asc. 50 ft. over S. slope.
- 56.50 Spur, slopes E.; desc. 150 ft. over NE. slope.
- 68.80 Ravine, course S65°E.; asc. 70 ft. over S. slope.
- 73.00 Spur, slopes E.; desc. 120 ft. over NE. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 16 ins. in the ground, on bed rock, in mound of stone, for cor. of secs. 22, 23, 26, and 27, marked on brass cap.



1924

from which

- An oak, 14 ins. dia., brs N.77°E., 181 lks. dist., marked T7S R18E S23 BT.
- A live oak, 24 ins. dia., brs S.22 $\frac{1}{2}$ °E., 116 lks. dist., marked T7S R18 E S26 BT.
- An oak, 16 ins. dia., brs S.39 $\frac{3}{4}$ °W., 143 lks. dist., marked T7S R18E S27 BT.
- An oak, 14 ins. dia., brs N.49°W., 36 lks. dist., marked T7S R18E S22 BT.

Land, mountainous.  
 Soil, rocky 3rd rate.  
 Timber, scattering oak and juniper.  
 Undergrowth, scrub oak, mesquite, cat claw and cacti.

- 40.00 S.89°56'E., on a random line, bet. secs. 23 and 26.
- 79.80 Set temp.  $\frac{1}{4}$  sec. cor.
- Intersect N. and S. line, 23 lks. S. of the cor. of secs. 23, 24, 25 and 26.
- Thence,

Chains.

S.89°54'W., on true line bet. secs. 23 and 26.  
Over mountainous land, through scattering timber and undergrowth.

- 3.30 Asc. 115 ft. over NE. slope.
- 10.80 Spur, slopes N.; desc, 75 ft. over NW. slope.
- 24.80 Ravine, course NE.; asc. 280 ft. over SE. slope.
- 28.20 Thence along N. slope.
- 34.70 Desc. 140 ft. over NW. slope.
- 40.00 Ravine, course N.; asc. 135 ft. over NE. slope, to Set an iron post, 3 ft. long, 1 in. dia., 12 ins. in the ground, on bed rock, in mound of stone, for 1/4 sec. cor., marked on brass cap

1/4 S23  
S26  
1924

from which

- A black oak, 10 ins. dia., brs S.39°W., 13 lks. dist., marked 1/4 S26 BT.
- An oak, 10 ins. dia., brs N.83°W., 25 lks. dist., marked 1/4 S23 BT.
- Asc. 35 ft. over NE. slope.
- 42.00 Spur, slopes NW.; desc. 340 ft. over W. slope.
- 60.60 Wash, 50 lks. wide, course N.; asc. 306 ft. over E. slope, to
- 79.80 The cor. of secs. 22, 23, 26, and 27.

Land, mountainous.  
Soil, sandy, 3rd rate.  
Timber, oak and juniper.  
Undergrowth, scrub oak, scattering manzanita, mesquite and cat claw.

N.0°01'W., bet. secs. 22 and 23.  
Over mountainous land, through scattering timber and undergrowth.

- .50 Ravine, course E.; thence along rolling E. slope.
- 10.00 Desc. 40 ft. over NE. slope.
- 12.90 Ravine, course SE.; asc. 160 ft. over SE. slope.
- 19.00 Spur, slopes E.; desc. 235 ft. over NE. slope.
- 34.80 Ravine, course E.; asc. 40 ft. over SE. slope.
- 39.90 Spur, slopes NE.; descend slightly to
- 40.00 Set an iron post, 3 ft. long, 1 in. dia., 10 ins. in the ground, on bed rock, in mound of stone, for 1/4 sec. cor., marked on brass cap

1/4  
S22 | S23  
1924

from which

- A live oak, 8 ins. dia., brs N.53°E., 90 lks. dist., marked 1/4 S23 BT.
- A live oak, 6 ins. dia., brs S.7°W., 17 lks. dist., marked 1/4 S22 BT.
- Desc. 210 ft. over NW. slope.
- 65.80 Ravine, course NE.; thence over rolling land.
- 67.00 Desc. 80 ft. over NW. slope
- 79.40 Wash, 10 lks. wide, course S.65°E. Asc. slightly to
- 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the ground, for cor. of secs. 14, 15, 22, and 23, marked on brass cap

T7S R18E  
S15 | S14  
S22 | S23  
1924

Survey of the Subdivisions of T7S, R18E.

Chains.

from which  
 A sycamore, 16 ins. dia., brs N.71 $\frac{3}{4}$ °E., 160 lks. dist., marked T7S R18E S14 BT.  
 An oak, 10 ins. dia., brs S.32 $\frac{1}{2}$ °E., 43 lks. dist., marked T7S R18E S23 BT.  
 A live oak, 8 ins. dia., brs S.12 $\frac{1}{4}$ °W., 104 lks. dist., marked T7S R18E S22 BT.  
 A sycamore, 16 ins. dia., brs N.71 $\frac{3}{4}$ °W., 160 lks. dist., marked T7S R18E S15 BT.  
 Land, mountainous.  
 Soil, sandy, 3rd rate.  
 Timber, scattering oak and sycamore.  
 Undergrowth, scrub oak, catclaw, mesquite, and cacti.

40.00 N.89°54'E. on random line bet. secs. 14 and 23.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.80 Intersect the N. and S. line, 30 lks. N. of the cor. of 13,14,23, and 24.  
 Thence  
 N.89°53'W., on true line bet. secs. 14 and 23.  
 Over mountainous land, through scattering timber and undergrowth.  
 Asc. 55 ft. over SE. slope.  
 4.00 Spur, slopes N.20°E.; desc. 435 ft. over W. slope.  
 28.50 Wash, 20 lks. wide, with stream of water 4 lks. wide, 4 ins. deep in bottom, course N.; asc. 195 ft. over NE. slope, to  $\frac{1}{4}$  sec. cor.  
 39.60 House, brs N.0°35'W., about 28.00 chs. dist.  
 39.90 Set an iron post, 3 ft. long, 1 in. dia., 15 ins. in the ground, on bed rock, in mound of stone, for  $\frac{1}{4}$  sec. cor., marked on brass cap.

$\frac{1}{4}$  S14  
 S23  
 1924

from which  
 A live oak, 6 ins. dia., brs N.35°E., 363 lks. dist., marked  $\frac{1}{4}$  S14 BT.  
 A juniper, 12 ins. dia., brs S.68°E., 165 lks. dist., marked  $\frac{1}{4}$  S23. BT.  
 Asc. 40 ft. over rolling NE. slope.  
 52.40 Spur, slopes N.; desc 110 ft. over NW. slope.  
 63.50 Ravine, course SW.; asc. 50 ft. over SE. slope.  
 65.50 Thence along S. slope.  
 68.40 Desc. 135 ft. over W. slope.  
 75.60 Wash, 30 lks. wide, course N.; asc. 20 ft. over E. slope, to  
 79.80 The cor. of secs. 14,15,22, and 23.

Land, mountainous.  
 Soil, sandy, 3rd rate.  
 Timber, oak and juniper.  
 Undergrowth, mesquite, catclaw, cacti.

N.0°01'W., bet. secs. 14 and 15.  
 Over mountainous land, through scattering timber and undergrowth.  
 Desc. 20 ft. over gentle NE. slope.  
 16.00 Wash, 50 lks. wide, course NW.; asc. 210 ft. over SW. slope.  
 39.90 Short spur, slopes W. Descend slightly to  
 40.00 Set an iron post, 3 ft. long, 1 in. dia., 18 ins. in the ground, on bed rock, in mound of stone, for  $\frac{1}{4}$  sec. cor., marked on brass cap.

Chains.

$$\frac{1}{4}$$

S15	S14
-----	-----

1924

from which

An oak, 14 ins. dia., brs S.  $50\frac{1}{4}^{\circ}$ E., 112 lks. dist., marked  $\frac{1}{4}$  S14 BT.An oak, 8 ins. dia., brs N.  $16^{\circ}$ W., 182 lks. dist., marked  $\frac{1}{4}$  S15 BT.

Desc. 75 ft. over NW. slope.

45.40 Head of short ravine, course W.; asc. 275 ft. over SW. slope.

63.00 Spur, slopes W.; desc. 240 ft. over NW. slope, to

80.00 Set an iron post, 3 ft. long, 2 ins. dia., 16 ins. in the ground, on bed rock, in mound of stone, for cor. of secs. 10, 11, 14, and 15, marked on brass cap.

T7S	R18E
S10	S11
S15	S14

1924

from which

A live oak, 10 ins. dia., brs N.  $85\frac{1}{2}^{\circ}$ E., 179 lks. dist., marked T7S R18E. S11 BT.A live oak, 6 ins. dia., brs S.  $70^{\circ}$ E., 146 lks. dist., marked T7S R18E S14 BT.A live oak, 8 ins. dia., brs N.  $50\frac{1}{4}^{\circ}$ W., 249 lks. dist., marked T7S R18E S10 BT.A pinyon, 8 ins. dia., brs S.  $30\frac{3}{4}^{\circ}$ W., 305 lks. dist., marked T7S R18E S15 BT.

Land, mountainous.

Soil, sandy, 3rd rate.

Timber, scattering oak and juniper.

Undergrowth, mesquite, cat claw, scrub oak, manzanita, and cacti.

S.  $89^{\circ}53'$ E., on random line bet. secs. 11 and 14.40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.78 Intersect the N. and S. line, 16 lks. S. of the cor. of secs. 11, 12, 13, and 14.

Thence

West on true line bet. secs. 11 and 14.

Over mountainous land, through scattering timber and undergrowth.

Desc. 335 ft. over rolling NW. slope, to

39.89 Set an iron post, 3 ft. long, 1 in. dia., 25 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap marked
$$\frac{1}{4}$$

S11	S14
-----	-----

1924

from which

An oak, 12 ins. dia., brs N.  $38\frac{1}{2}^{\circ}$ E., 47 lks. dist., marked  $\frac{1}{4}$  S11 BT.An oak, 10 ins. dia., brs S.  $22\frac{1}{4}^{\circ}$ E., 119 lks. dist., marked  $\frac{1}{4}$  S14 BT.

Desc. 35 ft. over NW. slope.

42.60 Parson's Canyon, with stream of water 5 lks. wide, 4 ins. deep, course NE.; asc. rocky E. slope 100 ft.

60.00 Rocky spur, slopes NE.; desc. 30 ft. over NW. slope.

65.00 Small ravine, course NW.; asc. 75 ft. over NE. slope.

Survey of the Subdivisions of T7S,R18E.

Chains.

77.00  
79.78

Spur, slopes N. ; desc. 20 ft. over W. slope, to  
The cor. of secs. 10,11,14, and 15.  
Land, mountainous.  
Soil, sandy 3rd rate.  
Timber, scattering juniper and oak  
Undergrowth, manzanita, scrub oak, cat claw and mesquite.

N.0°01'W., bet. secs. 10 and 11.  
Over mountainous land, through scattering timber and  
undergrowth.

8.10  
13.00  
40.00

Desc. 80 ft. over NW. slope.  
Ravine, course NW.; asc. 30 ft. over SW. slope.  
Thence over rolling NW. slope. Desc. 115 ft., to  
Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the  
ground, for 1/4 sec. cor., marked on brass cap

1/4  
S10 | S11

1924

from which

A live oak, 14 ins. dia., brs N.89°W. 152 lks. dist.,  
marked 1/4 S10 BT.  
A pinyon, 14 ins. dia., brs N.63°E., 159 lks. dist.,  
marked 1/4 S11 BT.

42.30  
46.00  
51.00  
72.00  
80.00

Ravine, course NW.; along W. slope.  
Desc. 60 ft. over NW. slope.  
Ravine, course NE.; asc. 115 ft. over SE. slope.  
Rocky spur, slopes NE.; desc. 135 ft. over NE. slope; to  
Set an iron post, 3 ft. long, 2 ins. dia., on bed rock,  
in mound of stone, for cor. of secs. 2,3,10, and 11,  
marked on brass cap.

T7S R18E  
S 3 | S 2  
S10 | S11

1924

from which

A pinyon, 8 ins. dia., brs N.65 1/2°E., 251 lks. dist.,  
marked T7S R18E S2 BT.  
A pinyon, 10 ins. dia., brs S.25 1/4°E., 209 lks. dist.,  
marked T7S R18E S11 BT.  
A pinyon, 6 ins. dia., brs S.57 1/2°W., 199 lks. dist.,  
marked T7S R18E S10 BT.  
A pinyon, 10 ins. dia., brs N.5°W., 245 lks. dist.,  
marked T7S R18E S3 BT.

Land, mountainous.  
Soil, sandy and rocky, 3rd rate.  
Timber, oak and juniper.  
Undergrowth, manzanita, scrub oak, mahogany.

40.00  
79.82

East on random line bet. secs. 2 and 11.  
Set temp. 1/4 sec. cor.  
Intersect the N. and S. line, 21 lks. N. of the cor. of  
secs. 1,2,11, and 12.


Thence  
N.89°51'W. on true line bet. secs. 2 and 11.  
Over mountainous land, through scattering timber and  
undergrowth.

Chains.	
	Asc. 100 ft. over SE. slope.
8.00	Ridge, brs NE. and SW.; desc. 621 ft. over NW. slope.
19.60	Parson's canyon, course N.64°E; asc. 550 ft. over broken E. slope.
32.80	Spur, slopes NE.; desc. 40 ft. over NW. slope, to
39.91	Set an iron post, 3 ft. long, 1 in. dia., 18 ins. in the ground, on bed rock, in mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap.
	$\frac{1}{4}$ S 2 <hr style="width: 50px; margin: auto;"/> S 11 1924
	from which
	A scrub oak, 6 ins. dia., brs S.52 $\frac{1}{2}$ °E., 203 lks. dist., marked $\frac{1}{4}$ S11 BT.
	A mahogany, 3 ins. dia., brs N.53°E., 47 lks. dist., marked $\frac{1}{4}$ S2 BT.
	Desc. 50 ft. over NW. slope.
41.40	Ravine, course NE.; asc. 140 ft. over SE. slope.
50.00	Spur, slopes NE.; desc. 380 ft. over broken W. slope.
61.70	Canyon, course N.; asc. 235 ft. over E. slope.
72.00	Spur, slopes NE.; desc. 140 ft. over broken W. slope, to
79.82	The cor. of secs., 2,3,10, and 11.
	Land, mountainous. Soil, sandy and rocky, 3rd rate. Timber, scattering oak, mahogany, and juniper. Undergrowth, scrub oak, mesquite, manzanita, and catclaw.
	-----
	N.0°17'E., on random line bet. secs. 2 and 3.
40.00	Set a temp. $\frac{1}{4}$ sec. cor.
45.97	Intersect the N. bdy. of the Tp., 5 lks. W. of the cor. of secs. 2,3,34, and 35., hereinbefore described.
	Thence
	S.0°19'W., on true line bet. secs. 2 and 3.
	Over mountainous land, through scattering timber and undergrowth.
	Asc. 200 ft. over N. slope.
5.00	Along top of spur, sloping N. from S. 15°E.
29.37	Desc. 75 ft. over SW. slope.
36.07	Ravine, course N.65°W.; asc. 65 ft. over NW. slope, to
45.97	Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S 3   S 2 1924
	from which
	A pinyon, 7 ins. dia., brs N.74°E., 48 lks. dist., marked $\frac{1}{4}$ S2 BT.
	A pinyon, 8 ins. dia., brs S.76°W., 31 lks. dist., marked $\frac{1}{4}$ S3 BT.
	Along rolling W. slope.
80.00	Desc. 85 ft. over broken SW. slope, to
85.97	The cor. of secs. 2,3,10, and 11.
	Land, mountainous. Soil, rocky, 3rd rate. Timber, pinyon, and oak. Undergrowth, scrub oak, manzanita, mesquite, and cacti.
	-----
	From the cor. of secs. 3,4,33, and 34, on the S. bdy. of the Tp., described in Book 1800 of this group,




Chains.

N.0°02'W., bet. secs. 33 and 34,  
Over mountainous land, through scattering timber and  
undergrowth.  
Asc. 335 ft. over S. slope.  
27.40 Spur, slopes SW.; desc, 70 ft. over NW. slope.  
30.00 Ravine, course S.64°W.; asc. 175 ft. over S. slope, to  
40.00 Set an iron post, 3 ft. long, 1 in. dia., 16 ins. in the  
ground, on bed rock, in mound of stone, for  $\frac{1}{4}$  sec. cor.,  
marked on brass cap



1924

Deposit stone marked cross (X) at base of post.  
No bearing trees available.  
Asc. 30 ft. over S. slope.  
44.00 Ridge, brs NW. and SE.; thence along E. slope.  
45.00 Desc. 800 ft. over N. slope.  
75.00 Ravine, course NW.  
77.00 Same ravine, course NE. \*Descend slightly to  
80.00 Set an iron post, 3 ft. long, 2 ins. dia., 12 ins. in  
the ground, on bed rock, in mound of stone, for cor. of  
secs. 27, 28, 33, and 34, marked on brass cap



1924

from which

A buck thorn, 6 ins. dia., brs N.30 $\frac{1}{2}$ °E., 109 lks. dist.,  
marked T7S R18E S27 BT.  
A pinyon, 8 ins. dia., brs S.46 $\frac{1}{4}$ °E., 243 lks. dist.,  
marked T7S R18E S34 BT.  
A juniper, 6 ins. dia., brs S.3°W., 154 lks. dist.,  
marked T7S R18E S33 BT.  
A buck thorn, 6 ins. dia., brs N.2 $\frac{1}{2}$ °W., 100 lks. dist.,  
marked T7S R18E S28 BT.

Land, mountainous.

Soil, rocky, 3rd rate.


Timber, scattering oak and juniper.

Undergrowth, scattering manzanita, cat claw, cacti, and  
scrub oak.

S.89°53'E. on random line bet. secs. 27 and 34.  
40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
80.14 Intersect the N. and S. line, 5 lks. N. of the cor. of  
secs. 26, 27, 34, and 35.

Thence

N.89°51'W., on true line bet. secs. 27 and 34.  
Over mountainous land, through scattering timber and  
undergrowth.  
Desc. 15 ft. over bank.  
.94 Ravine, course NW.; asc. very slightly along N. slope.  
36.00 Asc. 70 ft. over NE. slope.  
37.20 Spur, slopes N.; desc. 60 ft. over NW. slope, to  
40.07 Set an iron post, 3 ft. long, 1 in. dia., 16 ins. in the  
ground, on bed rock, in mound of stone, for  $\frac{1}{4}$  sec. cor.,  
marked on brass cap



1924

from which

Chains

A pinyon, 12 ins. dia., brs S.42 $\frac{1}{4}$ °W., 74 lks. dist., marked  $\frac{1}{4}$  S 34 BT.

A pinyon, 6 ins. dia., brs N.66°W., 22 lks. dist., marked  $\frac{1}{4}$  S27 BT.

Desc. 70 ft. over W. slope.

41.65 Ravine, course NW.; desc. 135 ft. over NW. slope.

53.00 Main wash, 40 lks. wide, from NE., course W., following down same and descending 80 ft.

79.00 Same wash, 30 lks. wide, course N.65°W.; asc. slightly to cor.

80.14 The cor. of secs. 27,28,33, and 34.

Land, mountainous.

Soil, rocky, 3rd rate.

Timber, scattering cedar and juniper.

Undergrowth, mesquite, cat claw, scrub oak, and cacti.

N.0°02'W., bet. secs. 27 and 28.

Over mountainous land, through scattering timber and undergrowth.

Desc. 35 ft. over N. slope.


1.50 Main wash, 40 lks. wide, course W. (Water in pools)

Asc. 120 ft. over S. slope.

6.80 Spur, slopes SW.; asc. general SW. slope 300 ft. to sec. cor.

21.45 Spur, slopes SW.

40.00 Set an iron post, 3 ft. long, 1 in. dia., 18 ins. in the ground, on bed rock, in mound of stone, for  $\frac{1}{4}$  sec. cor., marked on brass cap



from which

An oak, 10 ins. dia., brs N.61 $\frac{1}{2}$ °E., 62 lks. dist., marked  $\frac{1}{4}$  S27 BT.

No other tree available.

Deposit stone marked cross (X) at base of post.

Asc. 210 ft. over SW. slope.


50.00 Spur, slopes SW.; desc. 150 ft. over NW. slope.

55.20 Gulch, course SW.; asc. 160 ft. over SE. slope.

60.80 Spur, slopes SW.; desc. 60 ft. over NW. slope.

65.40 Gulch, course SW.; asc 300 ft. over SE. slope, to

80.00 Set an iron post, 3 ft. long, 2 ins. dia., 12 ins. in the ground, on bed rock, in mound of stone, for cor. of secs. 21,22,27, and 28, marked on brass cap



1924

from which

An oak, 8 ins. dia., brs N.28°E., 35 lks. dist., marked T7S R18E S22 BT.

An oak, 6 ins. dia., brs S.61°W., 100 lks. dist., marked T7S R18E S28 BT.

An oak, 6 ins. dia., brs N.43°W., 54 lks. dist., marked T7S R18E S21 BT.

No other tree available.

Land, mountainous.

Soil, rocky and sandy, 4th rate.

Timber, oak and juniper.

Undergrowth, scruboak and yucca.

Survey of the Subdivisions of T7S,R18E

Chains

40.00  
79.96

S.89°51'E., on random line bet. secs. 22 and 27.  
Set temp. 1/4 sec. cor.  
Intersect the cor. of secs. 22,23,26, and 27.

Thence  
N.89°51'W., on true line bet. secs. 22 and 27.  
Over mountainous land, through scattering timber and undergrowth.

.60  
30.60  
38.10  
40.00

Asc. 890 ft. over E. slope.  
Ravine, course N.65°E.  
Ridge, brs N. and S.; desc. 100 ft. over W. slope.  
Canyon, course N.20°W., asc. 40 ft. over NE. slope, to  
Set an iron post, 3 ft. long, 1 in. dia., on bed rock, in mound of stone, for 1/4 sec. cor., marked on brass cap

1/4 S22  
S27  
1924

from which

A cedar, 8 ins. dia., brs N.37 1/2°W., 111 lks. dist., marked 1/4 S22 BT.  
A juniper, 10 ins. dia., brs S.65 1/4°E., 403 lks. dist., marked 1/4 S27 BT.

57.90  
61.00  
79.96

Asc. 300 ft. over NE. slope.  
Ridge, brs NW. and SE.; desc. 250 ft. over cliffs on SW. slope.  
Desc. 400 ft. over SW. slope. to  
The cor. of secs. 21,22,27, and 28.

Land, mountainous.  
Soil, sandy, 3rd rate.  
Timber, scattering juniper and cedar.  
Undergrowth, scrub oak, mesquite, cat claw, and cacti.

28.60  
40.00

N.0°02'W., bet. secs. 21 and 22.  
Over rough mountainous land, through scattering timber and undergrowth.  
Asc. 540 ft. over SW. slope.  
Ridge, brs NW. and SE.; desc. 320 ft. over NW. slope, to  
Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for 1/4 sec. cor., marked on brass cap.

1/4  
S21 | S22

77.00  
80.00

No bearing trees available 1924  
Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
Desc. 960 ft. over NW. slope.  
Canyon, course NE.; asc. 20 ft. over SE. slope to  
Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the ground, for cor. of secs. 15,16,21, and 22, marked on brass cap

T7S | R18E  
S16 | S15  
S21 | S22

1924

from which  
An oak, 8 ins. dia., brs N.7 1/2°E., 121 lks. dist., marked T 7S R18E S15 BT.  
An oak, 10 ins. dia., brs S.80°E., 85 lks. dist., marked T7S R18E S22 BT.  
An oak, 8 ins. dia., brs S.12°W., 20 lks. dist.,

Chains.

marked T7S R18E S21 BT.  
An oak, 14 ins. dia., brs N.17½°W., 186 lks. dist.,  
marked T7S R18E S16 BT.

Land, mountainous.  
Soil, rocky and gravelly, 4th rate.  
Timber, scattering oak and juniper.  
Undergrowth, oak, yucca, greasewood, and catclaw.

40.00 S.89°51'E. on random line bet. secs. 15 and 22.  
Set temp. ¼ sec. cor.  
80.00 Intersect the N. and S. line, 28 lks. N. of the cor. of  
secs. 14,15,22, and 23.

Thence  
N.89°39'W., on true line bet. secs. 15 and 22.  
Over mountainous land, through scattering timber and  
undergrowth.

Asc. 495 ft. over E. slope.  
1.70 Stone house brs North, 50 lks. dist.  
11.10 Old mining road, brs NW. and SE.  
12.30 Table mountain stamp mill brs North, 4 chs. N.  
17.80 Two galvanized iron water tanks, brs South, 2.00 chs. dist.  
27.47 Cor. No. 4 of the Grand Duke mining claim, brs N.45°59'E.  
, 615 lks. dist. U.S.L.M. No.3313 brs N.2°13'W., 20.69 chs.  
29.00 Spur, slopes N.; desc. 255 ft. over NW. slope, to  
40.00 Set an iron post, 3 ft. long, 2 ins. dia., 20 ins. in  
the ground, on bed rock, in mound of stone, for ¼ sec.  
cor., marked on brass cap.

¼ S15  
S22  
1924

from which

An oak, 8 ins. dia., brs N.15°E., 13 lks. dist.,  
marked ¼ S15 BT.  
An oak, 16 ins. dia., brs S.10¼°W., 130 lks., dist.,  
marked ¼ S22 BT.

Desc. 30 ft. over W. slope.  
41.00 Canyon, course N.; asc. 335 ft. over E. slope.  
56.40 Ridge, brs N.20°E.; desc. 380 ft. over NW. slope.  
70.50 Ravine, course N.; asc. 130 ft. over NE. slope.  
78.70 Canyon, course NE.; asc. 20 ft. over SE. slope, to

80.00 The cor. of secs. 15,16,21, and 22.  
Land, mountainous.  
Soil, rocky, 3rd rate.  
Timber, scattering oak, cottonwood, cedar and juniper.  
Undergrowth, scrub oak, mahogany, mesquite and catclaw.

N.0°02'W., bet. secs. 15 and 16.  
Over mountainous land, through scattering timber and  
undergrowth.

Asc. 130 ft. over E. slope.  
28.00 Spur, slopes NE.; desc. 160 ft. over N. slope, to  
40.00 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in  
the ground, for ¼ sec. cor., marked on brass cap

¼  
S16 S15  
1924

Survey of the Subdivisions of T7S,R18E. BOOK 3704

Chains.

from which  
 A juniper, 12 ins. dia., brs S.70°E., 110 lks. dist.,  
 marked  $\frac{1}{4}$  S15 BT.  
 An oak, 5 ins. dia., brs N.74°W., 22 lks. dist.,  
 marked  $\frac{1}{4}$  S16 BT.  
 Desc. 90 ft. over N. slope.  
 46.00 Rocky canyon, 20 lks. wide, course NE.; asc. 530 ft. over  
 SE. slope.  
 73.00 Spur, slopes E.; desc. 60 ft. over NE. slope, to  
 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the  
 ground, for cor. of secs. 9,10,15, and 16, marked on  
 brass cap.

T7S	R18E.
S 9	S10
S16	S15

1924

from which  
 A manzanita, 6 ins. dia., brs N.40°E., 118 lks. dist.,  
 marked T7S R18E S10 BT.  
 A juniper, 12 ins. dia., brs S. 16°E., 217 lks. dist.,  
 marked T7S R18E S15 BT.  
 A juniper, 10 ins. dia., brs S.3 $\frac{3}{4}$ °W., 323 lks. dist.,  
 marked T7S R18E S16 BT.  
 An oak, 12 ins. dia. brs N.53°W., 210 lks. dist.,  
 marked T7S R18E S9 BT.

Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, scattering manzanita, juniper and oak.  
 Undergrowth, yucca, cat claw, and mesquite.

S.89°39'E. on random line bet. secs. 10 and 15.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.90 Intersect the N. and S. line, 2 lks. S. of the cor. of  
 secs. 10,11,14, and 15.  
 Thence  
 N.89°40'W., on true line bet. secs. 10 and 15.  
 Over mountainous land, through scattering timber and  
 undergrowth.  
 Desc. 60 ft. over W. slope.  
 2.10 Ravine, course NE.; asc. 235 ft. over E. slope.  
 17.00 Spur, slopes NW.; desc. 65 ft. over SW. slope.  
 27.00 Desc. broken SW. slope 365 ft. to.  
 39.95 Set an iron post, 3 ft. long, 1 in. dia., 14 ins. in  
 the ground, on bed rock, in mound of stone, for  $\frac{1}{4}$  sec.  
 cor., marked on brass cap.

$\frac{1}{4}$ S10
S15
1924

from which  
 An oak, 12 ins. dia., brs N.76°W., 266 lks. dist.,  
 marked  $\frac{1}{4}$  S10 BT.  
 A live oak, 14 ins. dia., brs S.49°E., 105 lks. dist.,  
 marked  $\frac{1}{4}$  S15 BT.  
 Desc. 25 ft. over SE. slope.  
 43.30 Wash, 100 lks. wide, course N.25°W. in Virgus Canyon. Asc.  
 105 ft. over NE. slope.  
 54.00 Spur, slopes NE.; desc. 100 ft. over NW. slope.  
 59.30 Wash, 80 lks. wide, course NE.; asc. 480 ft. over SE.  
 slope.  
 74.00 Asc. 150 ft. over broken cliffs, to  
 79.90 The cor. of secs. 9,10,15, and 16.


Chains

Land, mountainous.  
Soil, sandy and rocky, 3rd rate.  
Timber, scattering oak and juniper.  
Undergrowth, scrub oak, manzanita, catclaw, and mesquite.

N.0°02'W., bet. secs. 9 and 10.  
Over mountainous land, through scattering timber and undergrowth.

Desc. 255 ft. over N. slope.

- 8.40 Ravine, course NE.; along E. slope.
- 12.80 Ravine, course SE.; asc. 100 ft. over S. slope.
- 17.20 Short rocky spur, slopes NE.; desc. 165 ft. over N. slope.
- 30.62 Mrs. Blakes house brs S.45°24'E.
- 32.00 Short spur, slopes NE.; desc. N. slope 50 ft.
- 37.50 Desc. 150 ft. over NW. slope, to
- 40.00 Set an iron post, 3 ft. long, 1 in. dia., 24 ins. in the ground, on bed rock, in mound of stone, for 1/4 sec. cor., marked on brass cap



1924

from which


- A pinyon, 12 ins. dia., brs S.62 1/4°W., 180 lks. dist., marked 1/4 S9 BT.
- A live oak, 10 ins. dia., brs N.71°E., 186 lks. dist., marked 1/4 S10 BT.

Desc. 40 ft. over NW. slope.

- 42.40 Canyon, course NE., with stream of water, 10 lks. wide, 5 ins. deep, cou (Dry in summer.) Asc. 180 ft. over SE. slope.

Desc. 205 ft. over NE. slope.

- 73.90 Ravine, course NE.; asc. 75 ft. over SE; slope, to
- 79.30 Set an iron post, 3 ft. long, 2 ins. dia., 26 ins. in the ground, for wit. cor. to cor. of secs. 3, 4, 9, and 10, marked on brass cap.



1924

from which

- A pinyon, 4 ins. dia., brs N.39 3/4°E., 20 lks. dist., marked T7S R18E S3 WC BT.
- A live oak, 6 ins. dia., brs S.23 1/4°E., 180 lks. dist., marked T7S R18E S10 WC BT.
- A cedar, 6 ins. dia., brs S.64 3/4°W., 66 lks. dist., marked T7S R18E S9 WC BT.
- A pinyon, 8 ins. dia., brs N.34 1/2°W., 79 lks. dist., marked T7S R18E S4 WC BT.

- 80.00 True point for cor. of secs. 3, 4, 9, and 10, falls on unsuitable place for permanent cor.  
Mark cross (X) with chisel at true point for cor. on surface rock.

Land, mountainous.  
Soil, rocky and sandy, 3rd rate.  
Timber, scattering oak, juniper, cedar, and pinyon.  
Undergrowth, mesquite, cat claw, scrub oak, and cacti.

From true point for cor. of secs. 3, 4, 9 and 10,  
S.89°40'E., on random line bet. secs. 3 and 10.

- 40.00 Set temp. 1/4 sec. cor.

Survey of the Subdivisions of T7S,R18E.

Chains. 80.12	<p>Intersect the N. and S. line, 9 lks. S. of the cor. of secs. 2,3,10, and 11. Thence N.89°44'W., on true line bet. secs. 3 and 10. Over mountainous land, through scattering timber and undergrowth. Asc 100 ft. over NE. slope. 14.00 Ridge, brs N. and S.; desc. SW. slope 30.00 Large ravine, course N.; asc. E. slope 37.00 Top of spur, slopes N. Desc. 40 ft., over W. slope, to 40.06 Set an iron post, 3 ft. long, 1 in. dia., on bed rock, in mound of stone, for <math>\frac{1}{4}</math> sec. cor., marked on brass cap</p> <p style="text-align: center;"><math>\frac{1}{4}</math> S 3 S10 1924</p> <p>from which A pinyon, 6 ins. dia., brs S, 11<math>\frac{3}{4}</math>°W., 38 lks. dist., marked <math>\frac{1}{4}</math> S10 BT. A pinyon, 8 ins. dia., brs N.63°W., 201 lks. dist., marked <math>\frac{1}{4}</math> S3 BT. Desc. 280 ft. over W. slope. 50.60 Box ravine, course NW.; asc. along NE. slope 130 ft. 59.70 End of spur, slopes NW.; desc. 230 ft. over broken cliffs 68.90 Virgus Canyon, course N.; asc. 470 ft. over E. slope, to 80.12 The true point for cor. of secs. 3,4,9 and 10.</p>
	<p>Land, mountainous. Soil, rocky, 3rd rate. Timber, scattering pinyon, cedar, oak, and juniper. Undergrowth, scrub oak, manzanita, and cacti.</p>
	<p>From true point for cor. of secs. 3,4,9 and 10, N.0°18'E. on random line bet. secs. 3 and 4.</p>
40.00	Set temp. $\frac{1}{4}$ sec. cor.
85.34	Intersect the N. bdy. of the Tp., 5 lks. W. of the cor. of secs. 3,4,33, and 34, hereinbefore described.
	<p>Thence S. 0°20'W on true line bet. secs. 3 and 4. Over mountainous land, through scattering timber and undergrowth.</p>
5.84	Along gentle E. slope. Cliff, 20 ft. high, facing S.; desc. 180 ft. over SE. slope.
16.54	Ravine, course E.; asc. 100 ft. over NE. slope.
26.34	Thence along E. slope.
33.34	Ravine, course NE.; asc. 90 ft. over NE. slope.
41.34	Thence along E. slope, to
45.34	Set an iron post, 3 ft. long, 1 in. dia., 20 ins. in the ground, on bed rock, in mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap.
	<p style="text-align: center;"><math>\frac{1}{4}</math> S 4   S 3 1924</p>
	<p>from which A live oak, 4 ins. dia., brs S.8<math>\frac{1}{4}</math>°W., 219 lks. dist., marked <math>\frac{1}{4}</math> S4 BT. A pinyon, 5 ins. dia., brs N.31°E., 47 lks. dist., marked <math>\frac{1}{4}</math> S3 BT.</p>
55.34	Along E. slope descending 40 ft. Canyon, from the S.; course NE.; Follow up same.
66.34	Leave same canyon, from SW.; course N.
80.84	Asc. 280 ft. over NW. slope. Spur, slopes NE.; desc. 55 ft. over SE. slope, to

## Survey of the Subdivisions of T7S, R18E.

BOOK 3704

38

Chains.

85.34

The cor. of secs. 3, 4, 9, and 10.  
Land, mountainous.  
Soil, rocky, 3rd rate.  
Timber, scattering oak, juniper, cedar and pinyon.  
Undergrowth, scrub oak, mesquite, cat claw, palo verde,  
and cacti.

From the cor. of secs. 4, 5, 32; and 33, on the S. bdy.  
of the Tp., described in book "F" of this group,

Thence

N.0°02'W., bet. secs. 32 and 33.

Over mountainous land, through scattering timber and  
undergrowth.

Asc. 60 ft. over S. slope.

5.20

Spur, slopes S.65°W.; desc. 240 ft. over NW. slope.

18.90

Ravine, course W.; asc. 500 ft. over SW. slope, to

40.00

Set an iron post, 3 ft. long, 1 in. dia., 12 ins. in the  
ground, on bed rock, in mound of stone, for  $\frac{1}{4}$  sec. cor.,  
marked on brass cap:

S32	S33
-----	-----

1924

from which

A live oak, 10 ins. dia., brs N.51 $\frac{1}{2}$ °E., 292 lks. dist.,  
marked  $\frac{1}{4}$  S33 BT.A live oak, 12 ins. dia., brs N.16 $\frac{1}{2}$ °W., 232 lks. dist.,  
marked  $\frac{1}{4}$  S32 BT.

Asc. slightly.

40.50

Ridge, brs S.65°W.; desc. 70 ft. over NW. slope.

47.50

Head of ravine, course SW.

52.00

Saddle in spur, slopes NW.; then along E. slope.

65.20

Desc. 295 ft. over NE. slope.

72.50

Ravine, course NE.; continue descent, to

80.00

Set an iron post, 3 ft. long, 2 ins. dia., 12 ins. in  
the ground, on bed rock, in mound of stone, for cor. of  
secs. 28, 29, 32, and 33, marked on brass cap

T7S	R18E
-----	------

S29	S28
-----	-----

S32	S33
-----	-----

1924

from which

A juniper, 5 ins. dia., brs N.58 $\frac{1}{2}$ °E., 95 lks. dist.,  
marked T7S R18E S28 BT.A juniper, 14 ins. dia., brs S.51°E.; 206 lks. dist.,  
marked T7S R18E S33 BT.A juniper, 12 ins. dia., brs S.74 $\frac{1}{2}$ °W., 162 lks. dist.,  
marked T7S R18E S32 BT.A juniper, 10 ins. dia., brs N.76 $\frac{1}{2}$ °W., 357 lks. dist.,  
marked T7S R18E S29 BT.

Land, mountainous.

Soil, sandy 3rd rate.

Timber, scattering juniper and oak.

Undergrowth, scrub oak, cat claw, mesquite, and cacti.

40.00

S.89°53'E., on a random line bet. secs. 28 and 33.

80.04

Set a temp.  $\frac{1}{4}$  sec. cor.Intersect the N. and S. line, 9 lks. S. of the cor.  
of secs. 27, 28, 33, and 34.



Survey of the Subdivisions of T7S,R18E.

BOOK 3704

39

Chains. Thence  
 N.89°57'W., on true line bet. secs. 28 and 33.  
 Over mountainous land, through scattering timber and  
 undergrowth.  
 Asc. 20 ft. over NE. slope.  
 2.30 Spur, slopes N.; desc. 85 ft. over NW. slope.  
 8.70 Horse corral, brs. South, 20 lsk dist.  
 8.80 Wash, 70 lks. wide, course SW.  
 13.20 Same wash, course NW.; asc. 30 ft. over NE. slope.  
 22.40 Spur, slopes N.; desc. 90 ft. over NW. slope.  
 37.00 Wash, 50 lks. wide, course SW., with stream of water in  
 bottom 4 lks. wide, 2 ins. deep.  
 Asc. 95 ft. over SE. slope.  
 39.70 Spur, slopes S.; desc. 10 ft. over SW. slope, to  
 40.00 Set an iron post, 3 ft. long, 1 in. dia., 18 ins. in the  
 ground, on bed rock, in mound of s tone, for  $\frac{1}{4}$  sec. cor.  
 marked on brass cap

$\frac{1}{4}$  S28  
 S33  
 1924

from which  
 A cedar, 6 ins. dia., brs N.4°W., 68 lks. dist.,  
 marked  $\frac{1}{4}$  S28 BT.  
 A cedar, 8 ins. dia., brs S, 85 $\frac{1}{4}$ °W., 260 lks. dist.,  
 marked  $\frac{1}{4}$  S33 BT.  
 Desc. 165 ft. over W. slope.  
 42.90 Enter wash, from SE., course West and follow down same.  
 48.60 Leave wame wash, from the East, course SW. (Note: this  
 wash has stream of water 5 lks. wide, 4 ins. deep, in  
 bottom, which runs only in the winter.)  
 Asc. 104 ft. over SE. slope.  
 50.00 Short spur, slopes S.; desc. 100 ft. over SW. slope.  
 54.40 Wash, 40 lks. wide, with stream of water, 5 lks. wide,  
 4 ins. deep, course NW. (Same wash)  
 Asc. 175 ft. over rocky E. slope.  
 58.50 Thence along rolling N. slope.  
 69.00 Spur, slopes NW.; desc. 90 ft. over SW. slope.  
 71.30 Ravine, course N.; asc. 240 ft. over E. slope, to  
 80.04 The cor. of secs. 28, 29, 32, and 33.  
 Land, mountainous.  
 Soil, sandy and rocky, 3rd rate.  
 Timber, scattering oak, juniper, pinyon, and cedar.  
 Undergrowth, scrub oak, mesquite, cat claw, and cacti.

N.0°02'W., bet. secs. 28 and 29.  
 Over mountainous land, through scattering timber and  
 undergrowth.  
 Desc. 520 ft. over N. slope.  
 8.30 Wash, 50 lks. wide, with stream of water in bottom, 3 lks.  
 wide, 3 ins. deep, course W.; asc. 550 ft. over S. slope  
 31.00 Spur, slopes N.65°W.; desc. 155 ft. over NE. slope, to  
 40.00 Set an iron post, 3 ft. long, 1 in. dia., 25 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap.

$\frac{1}{4}$   
 S29 | S28  
 1924

from which  
 A cedar, 8 ins. dia., brs N.20°E., 235 lks. dist.,  
 marked  $\frac{1}{4}$  S28 BT.  
 A cedar, 4 ins. dia., brs N.50°W., 204 lks. dist.,  
 marked  $\frac{1}{4}$  S29 BT.  
 Desc. 75 ft. over NE. slope

## Chains

44.20 Wash, 15 lks. wide, course NW.; asc. 60 ft. over SW. slope  
 55.00 Sheep shed brs East, about 15 chs. dist.  
 58.00 Adobe house in canyon, brs West, about 15.00 chs. dist.,  
 68.50 Ravine, course SW.; asc. 90 ft. over SE. slope, to  
 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 12 ins. in the  
 ground, on bed rock, in mound of stone, for cor. of  
 secs. 20, 21, 28, and 29, marked on brass cap

T7S	R18E
S20	S21
S29	S28

1924

from which

A cedar, 8 ins. dia., brs N. 27° E., 195 lks. dist.,  
 marked T7S R18E S21 BT.

A cedar, 6 1/4 ins. dia., brs S. 36° E., 164 lks. dist.,  
 marked T7S R18E S28 BT.

A mesquite, 6 ins. dia., brs S. 87° W., 241 lks. dist.,  
 marked T7S R18E S29 BT.

A mesquite, 7 ins. dia., brs N. 67° W., 260 lks. dist.,  
 marked T7S R18E S20 BT.

Land, mountainous.

Soil, sandy 3rd rate.

Timber, scattering oak, juniper, cedar, and pinyon.

Undergrowth, mesquite, scrub oak, and catclaw and cacti.

40.00 S. 89° 57' E., on random line bet. secs. 21 and 28.  
 Set temp. 1/4 sec. cor.  
 79.80 Intersect the N. and S. line, 33 lks. N. of the cor. of  
 secs. 21, 22, 27, and 28.

Thence

N. 89° 43' W., on true line bet. secs. 21 and 28.

Over mountainous land, through scattering timber and  
undergrowth.

39.90 Desc. 630 ft. over SW. slope to sec. cor.  
 Set an iron post, 3 ft. long, 1 in. dia., 20 ins. in  
 the ground, on bed rock, in mound of stone, for 1/4  
 sec. cor., marked on brass cap

1/4 S21
S28

1924

Deposit stone marked cross (X) at base of post

No bearing trees available.

Desc. 240 ft. over SW. slope.

60.00 Wash, 20 lks. wide, course SW.; asc. 80 ft. over SE.  
 slope.

70.00 Spur, slopes SW.; desc. 140 ft. over NW. slope.

76.00 Wash, 10 lks. wide, course SW. (Very small stream in bottom)  
 Ascend 50 ft. over SE. slope, to

79.80 The cor. of secs. 20, 21, 28, and 29.

Land, mountainous.

Soil, rocky and sandy, 4th rate.

Timber, oak and juniper.

Undergrowth, oak, yucca, greasewood, and catclaw.


13.00 N. 0° 02' W., bet. secs. 20 and 21.  
 Over mountainous land, through scattering timber and  
 undergrowth.  
 Asc. 140 ft. over SE. slope.  
 Spur, slopes SW.; Desc. 70 ft. over NW. slope.

Survey of the Subdivisions of T7S,R18E.

BOOK 3704

Chains.

20.00 Rocky gulch, course SW.; asc. 450 ft. over SE. slope, to  
40.00 Set an iron post, 3 ft. long, 1 in. dia., on bed rock,  
in mound of stone, for 1/4 sec. cor., marked on brass cap




1924

Deposit stone marked cross (X) at base of post.  
Asc. 620 ft. over SW. slope to sec. cor.

49.00 Spur, slopes SW.; continue ascent.

57.00 Spur, slopes N.70°W.; continue ascent.

80.00 Set an iron post, 3 ft. long, 2 ins. dia., 15 ins. in the  
ground, on bed rock, in mound of stone, for cor. of  
secs. 16,17,20, and 21, marked on brass cap



1924

from which

An oak, 6 ins. dia., brs S.83 1/4°E., 21 lks. dist.,  
marked T7S R18E S21 BT.

An oak, 26 ins. dia., brs S.65 1/2°W., 110 lks. dist.,  
marked T7S R18E S20 BT.

An oak, 8 ins. dia., brs N.23°W. 94 lks. dist.,  
marked T7S R18E S17 BT.

No other tree available.

Land, mountainous.

Soil, rocky 4th rate.

Timber, scattering oak and juniper.

Undergrowth, oak, yucca, greasewood, and catclaw.

S.89°43'E. on random line bet. secs. 16 and 21.

40.00 Set temp. 1/4 sec. cor.

80.10 Intersect the N. and S. line, 2 lks. S. of the cor.  
of secs. 15,16,21, and 22.

Thence


N.89°44'W., on true line bet. secs. 16 and 21.

Over mountainous land, through scattering timber and  
undergrowth.

Asc. 700 ft. over E. slope.

28.90 Spur, slopes NE.; desc. 220 ft. over NW. slope, to

40.05 Set an iron post, 3 ft. long, 1 in. dia., on cross (X) on  
bed rock, in mound of stone, for 1/4 sec. cor., marked  
on brass cap



1924

No bearing trees available.

Desc. 180 ft. over NW. slope:

48.60 Gulch, course N.; thence over N. slope.

52.60 Gully, course NE.; asc. 540 ft. over NE. slope.

74.50 Main ridge, brs NW. and SE.; desc. 300 ft. over W. slope, to

80.10 The cor. of secs. 16,17,20, and 21.

Land, mountainous.

Soil, rocky 4th rate.

Timber, scattering oak and juniper.

Undergrowth, oak, yucca, greasewood, and catclaw.

Chains.


N.0°02' W. bet. secs. 16 and 17.  
Over mountainous land, through scattering timber and undergrowth.  
Asc. 700 ft. over precipitous cliffs on SW. slope.

8.60 Top of cliff, 60 ft. high, facing SW.; continue ascent along ridge, brs NW. and SE.

39.00 Strike level mesa land on top of Table Mountain, brs E. and W.

40.00 True point for  $\frac{1}{4}$  sec. cor. falls on small cliff, unsuitable for permanent cor. Therefore, at

40.50 Set an iron post, 3 ft. long, 1 in. dia., 8 ins. in the ground, on bed rock, in mound of stone, for witness cor. to  $\frac{1}{4}$  sec. cor., marked on brass cap,



from which

A juniper, 8 ins. dia., brs N.7 $\frac{3}{4}$ °W., 216 lks. dist., marked  $\frac{1}{4}$  S17 WC BT.

A juniper, 8 ins. dia., brs N.3°E., 249 lks. dist., marked  $\frac{1}{4}$  S16 WC BT.


Over level top of Table Mountain.

57.00 Desc. 270 ft. over NW. slope.

71.50 Gulch, course N.70°W.; thence over W. slope.

77.00 Gully, course W.; asc. 90 ft. over SW. slope, to

80.00 Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the ground, for cor. of secs. 8,9,16, and 17, marked on brass cap



1924

from which

An oak, 16 ins. dia., brs N.68°E., 254 lks. dist., marked T7S R18E S9 BT.

A juniper, 20 ins. dia., brs S.38°W., 282 lks. dist., marked T7S R18E S17 BT.

A juniper, 8 ins. dia., brs N.6°W., 290 lks. dist., marked T7S R18E S8 BT.

No other tree available.

Land, mountainous.

Soil, sandy and rocky, 3rd rate.

Timber, scattering oak and juniper.

Undergrowth, oak and catclaw.

40.00 S.89°44'E., on random line bet. secs. 9 and 16.

80.18 Set temp.  $\frac{1}{4}$  sec. cor.

Intersect the N. and S. line, 9 lks. S. of the cor. of secs. 9,10,15, and 16.

Thence

N.89°48'W., on true line bet. secs. 9 and 16.

Over mountainous land, through scattering timber and undergrowth.

Asc. 210 ft. over NE. slope:

17.50 Spur, slopes NE.; desc. 160 ft. over NW. slope.

23.80 Ravine, course NE.; asc. 470 ft. over E. slope, to

40.09 Set an iron post, 3 ft. long, 1 in. dia., 10 ins. in the ground, on bed rock, in mound of stone, for  $\frac{1}{4}$  sec. cor.

Survey of the Subdivisions of T7S, R18E.

Chains.

marked on brass cap.

1/4 S 9  
S 16  
1924

from which

An oak, 10 ins. dia., brs S.16°W., 247 lks. dist., marked 1/4 S16 BT.

An oak, 10 ins. dia., brs N.62 1/4°W., 193 lks. dist., marked 1/4 S9 BT.

Asc. 740 ft. over NE. slope.

70.00 Top of ridge, brs NW. and SE.; desc. 190 ft. over SW. slope, to  
80.18 The cor. of secs. 8, 9, 16, and 17.

Land, rough mountains.

Soil, rocky, 4th rate.

Timber, scattering oak and juniper.

Undergrowth, yucca, cat claw, and mesquite.

N.0°02'W., bet. secs. 8 and 9.

Over mountainous land, through scattering timber and undergrowth.

Asc. 110 ft. over SW. slope.

7.00 Long spur, slopes N.80°W.; desc. 1100 ft. over N. slope to sec. cor.

40.00 Set an iron post, 3 ft. long, 1 in. dia., 10 ins. in the ground, on bed rock, in mound of stone, for 1/4 sec. cor., marked on brass cap

1/4  
S 8 | S 9  
1924

from which

A juniper, 6 ins. dia., brs N.80°W., 70 lks. dist. mkd. 1/4 S8 BT. No other tree available.

Desc. 100 ft. over N. slope.

43.00 Canyon, with small stream of water, 1 lk. wide, course NW.; thence asc. 60 ft. over W. slope.

59.00 Spur, slopes W.; desc. 200 ft. over N. slope.

67.00 Canyon, course NW.; asc. 130 ft. over SE. slope.

74.00 Spur, slopes NW.; desc. 140 ft. over N. slope, to

80.00 Set an iron post, 3 ft. long, 2 ins. dia., 12 ins. in the ground, on bed rock, in mound of stone; for cor. of secs. 4, 5, 8, and 9, marked on brass cap

T7S R18E  
S 5 | S 4  
S 8 | S 9

1924

from which

A cedar, 6 ins. dia., brs N.13°E., 376 lks. dist., marked T8S R18E S4 BT.

A mahogany, 5 ins. dia., brs S.44 3/4°E., 133 lks. dist., marked T7S R18E S9 BT.

A pinyon, 10 ins. dia. brs S.53 1/2°W., 215 lks. dist., marked T7S R18E S8 BT.

A cedar, 6 ins. dia., brs N.67°W., 22 lks. dist., marked T7S R18E S5 BT.

Land, mountainous.

Soil, rocky 4th rate.

Timber, scattering oak and juniper.

Undergrowth, scrub oak, yucca and manzanita.

## Survey of the Subdivisions of T7S, R18E.

BOOK 3704

44


Chains.		
	S. 89°48'E., on random line bet. secs. 4 and 9.	
40.00	Set temp. $\frac{1}{4}$ sec. cor.	
79.78	Intersect the N. and S. line, 9 lks. N. of the true point for cor. of secs. 3, 4, 9 and 10.	
	Thence	
	N. 89°44'W., on true line bet. secs. 4 and 9.	
	Over mountainous land, through scattering timber and undergrowth.	
	Asc. 800 ft. over E. slope.	
28.60	High spur, slopes N.; desc. 115 ft. over NW. slope.	
39.89	Set an iron post, 3 ft. long, 1 in. dia., on cross (X) on surface rock, in mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap	
	$\frac{1}{4} \begin{array}{c} S \ 4 \\ \hline S \ 9 \end{array}$ 1924	
	from which	
	A pinyon, 7 ins. dia., brs N. 1°E., 128 lks. dist., marked $\frac{1}{4}$ S4 BT.	
	A cedar, 10 ins. dia., brs S. 43°E., 149 lks. dist., marked $\frac{1}{4}$ S9 BT.	
	Desc. 255 ft. over NW. slope.	
48.40	Canyon, course NE.; asc. 315 ft. over E. slope.	
62.00	Ridge, brs NE. and SW.; desc. 395 ft. over W. slope.	
78.78	Ravine, course NW.; asc. 20 ft. over E. slope.	
79.78	The cor. of secs. 4, 5, 8, and 9.	
	Land, mountainous.	
	Soil, rocky 3rd rate.	
	Timber, scattering oak, juniper, and cedar, cottonwood, and pinyon.	
	Undergrowth, palo verde, mesquite, cat claw, scrub oak, mahogany, and cacti.	
	-----	
	N. 0°20'E., on random line bet. secs. 4 and 5.	
40.00	Set temp. $\frac{1}{4}$ sec. cor.	
84.68	Intersect the N. bdy. of the Tp., 28 lks. E. of the cor. of secs. 4, 5, 32, and 33, hereinbefore described.	
	Thence	
	S. 0°08'W., on true line bet. secs. 4 and 5.	
	Over mountainous land, through scattering timber and undergrowth.	
	Desc. 50 ft. over SW. slope.	
2.20	Ravine, course NE.; asc. 180 ft. over NE. slope.	
	Along broken E. slope.	
28.00	Asc. 290 ft. over NE. slope. to	
44.68	Set an iron post, 3 ft. long, 1 in. dia., 18 ins. in the ground, on bed rock, in mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap	
	$\frac{1}{4} \begin{array}{c} S \ 5 \   \ S \ 4 \end{array}$ 1924	
	from which	
	A pinyon, 10 ins. dia., brs S. 2 $\frac{1}{4}$ °W., 53 lks. dist., marked $\frac{1}{4}$ S5 BT.	
	A cedar, 20 ins. dia., brs S. 64°E., 161 lks. dist., marked $\frac{1}{4}$ S4 BT.	
	Asc. 310 ft. over broken NE. slope.	
52.00	Ridge, brs NW. and SE.; desc. 240 ft. over SW. slope.	
70.40	Ravine, course N. 65°W.; asc. 35 ft. over NW. slope.	
74.40	Short spur, slopes NW.; desc. 55 ft. over SW. slope.	
82.10	Ravine, course NW.; asc. 30 ft. over NE. slope. to	

Survey of the Subdivisions of T7S,R18E.


Chains.

84.68 The cor. of secs. 4,5,8, and 9.  
 Land, mountainous.  
 Soil, rocky, 3rd rate.  
 Timber, scattering oak, juniper, cedar and pinyon.  
 Undergrowth, scrub oak, cat claw, mesquite, mahogany, and cacti.

From the cor. of secs. 5,6,31, and 32 on the S. bdy. of the Tp., described in book "F", of this group; N.0°3'W., bet. secs. 31 and 32.  
 Over mountainous land, through scattering timber and undergrowth.  
 Asc. 188 ft. over SW. slope.  
 8.00 Spur, slopes W.; desc. 145 ft. over N. slope.  
 15.10 Head of ravine, course W.; asc. 70 ft. over SW. slope.  
 20.00 Spur, slopes W.; desc. 60 ft. over NW. slope.  
 24.00 Head of ravine, course W.; asc. 90 ft. over SE. slope.  
 33.90 Desc. 60 ft. over NW. slope.  
 34.40 Ravine, course S.65°W.; asc. 50 ft. over SW. slope, to  
 39.95 Set an iron post, 3 ft. long, 1 in. dia., 20 ins. in the ground, on bed rock, in mound of stone, for  $\frac{1}{4}$  sec. cor., marked on brass cap



1924 No bearing trees available.  
 Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
 Asc. 75 ft. over SW. slope.  
 49.00 Spur, slopes W.; desc 170 ft. over NW. slope.  
 66.50 Thence over rolling W. slope.  
 73.60 Spur, slopes S.65°W.; desc. 145 ft. over N. slope, to sec. cor.  
 79.12 Wire fence, brs NE. and SW.  
 79.90 Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground, on bed rock, in mound of stone, for cor. of secs. 29,39,31, and 32, marked on brass cap



1924 No bearing trees available.  
 Deposit stone marked cross (X) at base of post.  
 Ranch house brs. N.60°W., 17.00 chs. dist.  
 Soil, sandy and rocky, 3rd rate.  
 Timber, scattering oak and juniper.  
 Undergrowth, mesquite, cat claw, scrub oak, and cacti.

S.89°53'E., on random line bet. secs. 29 and 32.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.96 Intersect the N. and S. line, 2 lks. N. of the cor. of secs. 28,29,32, and 33.  
 Thence  
 N.89°52'W., on true line bet. secs. 29 and 32.  
 Over mountainous land, through scattering timber and undergrowth.  
 Along rolling N. slope.  
 13.00 Desc. 200 ft. over W. slope.  
 21.50 Ravine, course N.; asc. 140 ft. over E. slope.  
 27.00 Along rolling N. slope.  
 36.60 Desc. 150 ft. over W. slope.

## BOOK 3704

## Survey of the Subdivisions of T7S, R18E.

46

## Chains

- 39.90 Ravine, course N. Ascend slightly over E. slope, to  
39.98 Set an iron post, 3 ft. long, 1 in. dia., 18 ins. in the ground, on bed rock, in mound of stone, for  $\frac{1}{4}$  sec. cor., marked on brass cap
- (No bearing trees available.)  $\frac{1}{4}$  S29  
S32  
1924
- Deposit stone, marked cross (X) at base of post.  
Asc. 80 ft. over E. slope.
- 43.20 Spur, slopes N.; desc. 120 ft. over NW. slope.  
46.90 Ravine, course N.; asc. 100 ft. over E. slope.  
48.00 Along rolling N. slope.  
65.50 Desc. rolling NW. slope 160 ft. to sec. cor.  
79.20 Wire fence, brs N.20°W. and S.20°E.  
79.96 The cor. of secs. 29, 30, 31, and 32.
- Land, mountainous.  
Soil, sandy, 3rd rate.  
Timber, scattering cedar, juniper and oak.  
Undergrowth, scrub oak, mesquite, cat claw, and cacti.
- 
- N.89°53'W., on random line bet. secs. 30 and 31.  
40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
86.98 Intersect the W. bdy. of the Tp., S. of the original cor. of secs. 25, 30, 31, and 36 established by J. F. Hesse, N. S. D. Sr. in 1905, and hereinbefore described, on the E. and S. sides of the Sec. 30, firstly set and witnessed by record of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.
- Thence  
S.89°50'E., on true line bet. secs. 30 and 31.  
Over heavily rolling and mts. land, through scattering timber and undergrowth.  
Desc. 80 ft. over SE. slope.
- 17.00 Canyon, with stream of water 2 lks. wide, 2 ins. deep, course SW.; asc. 130 ft. over N. slope.  
25.80 Enter wash, 80 lks. wide, from the East, course NW. and follow up same.
- 46.98 On south bank of wash, set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap
- $\frac{1}{4}$  S 30  
S 31  
1924
- (No bearing trees available.) No bearing trees available.  
Raise mound of stone 3 ft. base, 2 ft. high, N. of cor.  
Continue along wash, course W.  
Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.
- 54.28 Old road to ranch brs NE. and SW.  
65.98 Leave same wash, from SE., course West.; thence asc. slightly over SW. slope.  
72.48 Short spur, slopes NW.; thence along N. slope to sec. cor.  
75.38 Wire fence, brs N.20°W. and S.20°E.  
86.98 The cor. of secs. 29, 30, 31, and 32.


Land, heavily rolling and mountainous.  
Soil, sandy and rocky, 3rd rate.  
Timber, scattering juniper.  
Undergrowth, cat claw, palo verde, and mesquite.

When this cor. is made, the S. side, 17.00 chs. dist.



Chains.


N.0°03'W., bet. secs. 29 and 30.  
 Over ~~mts.~~ land, through scattering undergrowth.  
 Desc. 100 ft. over N. slope.  
 2.50 Wire fence, brs N.20°W. and S.20°E.  
 4.00 NE. cor. of ~~field~~ field brs West, 30 lks. dist.  
 5.60 Main wash, 60 lks. wide, with water standing in places,  
 course W.; asc. 130 ft. over S. slope.  
 16.00 Spur, slopes W.; desc. 60 ft. over N. slope.  
 21.60 Gulch, course SW.; asc. 90 ft. over S. slope.  
 29.00 Spur, slopes SW; desc. 35 ft. over N. slope, to  
 31.60 Wash, 20 lks. wide, course SW.; asc. 70 ft. over W. slope.  
 40.00 Set an iron post, 3 ft. long, 1 in. dia., 10 ins. in the  
 ground, on bed rock, in mound of stone, for  $\frac{1}{4}$  sec. cor.  
 marked on brass cap



1924 No bearing trees available.

Deposit stone marked cross (X) at base of post.

Desc. 20 ft. over NW. slope.  
 43.00 Small canyon, course SW.; asc. 140 ft. over SE. slope.  
 51.00 Spur, slopes SW.; thence over W. slope.  
 58.00 Bend in canyon, from N.10°W., course S.20°W.  
 Asc. 310 ft. over SW. slope, to  
 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 10 ins. in the  
 ground, on bed rock, in mound of stone, for  $\frac{1}{4}$  sec. cor.,  
 marked on brass cap



1924 No bearing trees available.


Deposit stone marked cross (X) at base of post.

Land, mountainous.  
 Soil, sandy and gravelly, 3rd rate.  
 Timber, none.  
 Undergrowth, cat claw, paló verde, and mesquite.

40.00 S.89°52'E., on random line bet. secs. 20 and 29.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.92 Intersect the N. and S. line, 5 lks. S. of the cor. of  
 secs. 20, 21, 28, and 29.

Thence  
 N.89°54'W., on true line bet. secs. 20 and 29.  
 Over heavily rolling & mountainous land, thru scattering  
 timber and undergrowth.

Desc. 15 ft. over SW. slope.  
 2.70 Ravine, course SW.; asc. 80 ft. over SE. slope.  
 10.00 Spur, slopes SW.; desc. 50 ft. over SW. slope.  
 16.00 Ravine, course SW.; asc. 40 ft. over SE. slope.  
 19.00 Spur, slopes SW.; desc. 140 ft. over W. slope.  
 39.90 Ravine, course SW.  
 39.96 True point for  $\frac{1}{4}$  sec. cor. falls in ravine, unsuitable  
 for permanent cor. Therefore, at  
 40.30 Set an iron post, 3 ft. long, 1 in. dia., 12 ins. in  
 the ground, on bed rock, in mound of stone, for witness  
 cor. to  $\frac{1}{4}$  sec. cor., marked on brass cap.



1924

Chains

from which  
 . A mesquite, 8 ins. dia., brs N.  $27\frac{3}{4}^{\circ}$ W., 194 lks. dist.,  
 marked  $\frac{1}{4}$  S30 BT.  
 A buck thorn, 5 ins. dia., brs S.  $16\frac{1}{2}^{\circ}$ E., 28 lks. dist.,  
 marked  $\frac{1}{4}$  S29 BT.

41.10 Ravine, course SW.; asc. 190 ft. over SE. slope.  
 55.00 Spur, slopes SW.; desc. 200 ft. over NW. slope.  
 65.00 Wash, 20 lks. wide, course SW.; asc. 170 ft. over SE.  
 slope.  
 75.40 Spur, slopes SW.; desc. 40 ft. over SW. slope, to  
 79.92 The cor. of secs. 19, 20, 29, and 30.  
 Land, heavily rolling and mountainous.  
 Soil, sandy, 3rd rate.  
 Timber, scattering mesquite and buckthorn.  
 Undergrowth, mesquite, cat claw, palo verde, and cacti.

N.  $89^{\circ}50'$ W., on random line bet. secs. 19 and 30.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 86.89 Intersect the W. bdy. of the Tp., 35 lks N. of reestab. cor.  
 of secs. 19, 24, 25, and 30, hereinbefore described.

Thence  
 N.  $89^{\circ}56'$ E., on true line bet. secs. 19 and 30.  
 Over mts. land, through scattering undergrowth.  
 Desc. 30 ft. over SE. slope.  
 9.89 Enter wash, from the East, course SW. (40 lks. wide)  
 Follow up same.  
 20.89 Leave same wash, 30 lks. wide, course W., from the SE.  
 Asc. 360 ft. over SW. slope.  
 36.45 Spur, slopes SW.; desc 122 ft. over SE. slope, to  
 46.89 Set an iron post, 3 ft. long, 1 in. dia., 16 ins. in the  
 ground, on bed rock, in mound of stone, for  $\frac{1}{4}$  sec. cor.  
 marked on brass cap

$\frac{1}{4}$  S19  
 S30

1924 No bearing trees available.

Deposit stone marked cross (X) at base of post.  
 Desc. 70 ft. over S. slope.  
 54.89 Gulch, course SE.; asc. 250 ft. over SW. slope.  
 65.39 Spur, slopes S.; desc. 460 ft. over E. slope.  
 81.49 Canyon, 20 lks. wide, course S.; asc. 150 ft. over SW.  
 slope, to  
 86.89 The cor. of secs. 19, 20, 29, and 30.  
 Land, mountainous.  
 Soil, sandy and rocky, 4th rate.  
 Timber, none.  
 Undergrowth, cat claw, palo verde, and mesquite.

N.  $0^{\circ}03'$ W., bet. secs. 19 and 20.  
 Over mountainous land, thru scattering undergrowth  
 and brush.  
 Asc. 460 ft. over S. slope, to ridge.  
 25.00 Gully, course SW.; continue asc.  
 35.50 Ridge, brs E. and W.; desc. 30 ft. along NE. slope.  
 40.00 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$

S19 | S20

1924

No bearing trees available.

Chains.	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.						
	Desc. 470 ft. over NE. slope.						
74.00	Canyon, 20 lks. wide, course NW.; asc. 40 ft. over W. slope, <sup>x</sup> to						
80.00	Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the ground, for cor. of secs. 17,18,19, and 20; marked on brass cap						
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr><td>T7S</td><td>R18E</td></tr> <tr><td>S18</td><td>S17</td></tr> <tr><td>S19</td><td>S20</td></tr> </table>	T7S	R18E	S18	S17	S19	S20
T7S	R18E						
S18	S17						
S19	S20						
	1924 No bearing trees available.						
	Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.						
	Land, mountainous.						
	Soil, sandy and gravelly, 3rd rate.						
	Timber, none.						
	Undergrowth, cat claw, and greasewood.						
	<hr/>						
	S.89°54'E., on random line bet. secs. 17 and 20.						
40.00	Set antenna <sup>1</sup> / <sub>4</sub> sec. cor. to						
79.98	Intersect the N. and S. line, 5 lks. N. of the cor. of secs. 16,17,20, and 21.						
	Thence						
	N.89°52'W., on true line bet. secs. 17 and 20.						
	Over mountainous land, through scattering undergrowth.						
	Desc. broken W. slope 700 ft. to <sup>1</sup> / <sub>4</sub> sec. cor.						
20.00	Spur, slopes N.70°W.						
30.00	Same spur, slopes S.80°W.						
39.99	Set an iron post, 3 ft. long, 1 in. dia., 12 ins. in the ground, on bed rock, in mound of stone, for <sup>1</sup> / <sub>4</sub> sec. cor., marked on brass cap						
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr><td><sup>1</sup>/<sub>4</sub> S17</td></tr> <tr><td>S20</td></tr> </table>	<sup>1</sup> / <sub>4</sub> S17	S20				
<sup>1</sup> / <sub>4</sub> S17							
S20							
	1924 No bearing trees available.						
	Deposit stone marked cross (X) at base of post.						
	Desc. 500 ft. over W. slope to sec. cor.						
51.50	Gully, course SW.						
67.00	Gully, course S.70°W.						
79.98	The cor. of secs. 17,18,19, and 20.						
	Land, mountainous.						
	Soil, 3rd rate.						
	Timber, none.						
	Undergrowth, cat claw, greasewood.						
	<hr/>						
	S.89°56'W., on random line bet. secs. 18 and 19.						
40.00	Set temp. <sup>1</sup> / <sub>4</sub> sec. cor.						
86.84	Intersect the W. bdy. of the Tp., 5 lks. S. of reestab. cor. of secs. 13,18,19, and 24, hereinbefore described.						
	Thence						
	N.89°58'E., on true line bet. secs. 18 and 19.						
	Over mountainous land, through scattering undergrowth.						
	Desc. 50 ft. over SE. slope.						
5.00	Ravine, course SW.; asc. 315 ft. over SW. slope.						
21.14	Ranch house brs N.62 <sup>3</sup> / <sub>4</sub> °E.						
21.20	Ridge, brs NW. and SE.; desc. 155 ft. over NE. slope.						
31.00	Ravine, course N.20°E.; asc. 85 ft. over NW. slope.						
38.00	Spur, slopes N.65°E.; desc. 160 ft. over E. slope, to						
46.84	Set an iron post, 3 ft. long, 1 in. dia., 21 in. dia., on bed rock, in mound of stone, for <sup>1</sup> / <sub>4</sub> sec. cor., marked on brass cap						

Chains

$\frac{1}{4}$  S18  
S19  
1924

No bearing trees available.

Deposit stone marked cross (X) at base of post.

Desc. 55 ft. over NE. slope.

49.40 Short draw, course N.; asc. 60 ft. over NW. slope.

53.70 Spur, slopes N.; desc. 85 ft. over NE. slope.

68.30 Ravine, course N.; asc. 15 ft. over SW. slope.

72.20 Prospect shaft brs North, 1.00 ch. dist.

78.90 Holy Joe Wash, 15 lks. wide, course NW.; asc. 92 ft. over W. slope to top.

86.84 The cor. of secs. 17, 18, 19, and 20.

Land, mountainous, rolling.

Soil, rocky and sandy, 3rd rate.

Timber, none.

Undergrowth, mesquite, cat claw, greasewood, palo verde and cacti.

N.0°03'W., bet. secs. 17 and 18.

Over mountainous land, thru scattering timber and undergrowth.

Along W. slope.

14.20 Ravine, course W.; asc. 55 ft. over SW. slope.

24.14 Ranch house brs N.78°40'W.

Wire fence runs S.61°W.

25.85 Spring, brs East, 2.00 chs. dist.

Draw, course SW. Asc. 149 ft. over S. slope.

35.50 Spur, slopes SW.; thence desc. slightly over NW. slope, to

40.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap

(No bearing trees available)

$\frac{1}{4}$   
S18 | S17  
1924

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor  
Desc. 20 ft. over NW. slope.

41.80 Ravine, course SW.; asc. 800 ft. over SW. slope.

78.00 Bottom of rim, brs NW. and SE.; thence asc. 300 ft. over cliffs. facing SW.

80.00 Set an iron post, 3 ft. long, 2 ins. dia., over cross (x) on bed rock, in mound of stone, for cor. of secs. 7, 8, 17, and 18, marked on brass cap

T7S R18E  
S 7 | S 8  
S18 | S17

1924

from which

A juniper, 12 ins. dia., brs N.22°E., 50 lks. dist., marked T7S R18E S8 BT.

A juniper, 8 ins. dia., brs N.37°W., 23 lks. dist., marked T7S R18E S7 BT.

No other trees available

Land, mountainous.

Soil, rocky and sandy, 4th rate.

Timber, scattering juniper.

Undergrowth, oak, mahogany, cat claw, mesquite, cacti, ocotilla, spanish dagger and cholla.

Survey of the Subdivisions of T7S,R18E.

Chains		
40.00 79.96	S.89°52'E., on random line bet. secs. 8 and 17. Set temp. ¼ sec. cor. Intersect the cor. of secs. 8,9,16, and 17.	
38.00 39.98	Thence N.89°52'W., on true line bet. secs. 8 and 17. Over mountainous land, through scattering timber and undergrowth. Desc. 290 ft. over SW. slope to ¼ sec. cor. Spur, slopes SW.; desc. slightly. Set an iron post, 3 ft. long, 1 in. dia., 14 ins. in the ground, on bed rock, in mound of stone, for ¼ sec. cor., marked on brass cap	
47.00 67.00 79.96	<div style="text-align: center;"> <math display="block">\frac{1}{4} \text{ S } 8</math> <math display="block">\text{S17}</math> 1924 </div> <p>from which A juniper, 4 ins. dia., brs N.22°W., 160 lks. dist., marked ¼ S8 BT. An oak, 6 ins. dia., brs S.40½°W., 122 lks. dist., marked ¼ S17 BT. Desc. 170 ft. over SW. slope. Canyon, 20 lks. wide, course NW.; asc. 290 ft. over NE. slope. Spur, slopes NW.; desc. 190 ft. over SW. slope, to The cor. of secs. 7,8,17, and 18.</p>	
	Land, mountainous. Soil, black loam, 3rd rate. Timber, scattering juniper and juniper. Undergrowth, cat claw, yucca, and scrub oak.	
40.00 86.62 44.21 45.66 46.62	S.89°58'W., on random line bet. secs. 7 and 18. Set temp. ¼ sec. cor. Intersect the N. bdy. of line, Tp., 5 lks. N. of reestablished cor of secs. 7,12,13, and 18., hereinbefore described. Thence N.89°56'E., on true line bet. secs. 7 and 18. Over mountainous land, through scattering timber and undergrowth. Asc. 450 ft. over SW. slope. Thence along S. slope. Wire fence, brs S.24°W. and N.24°E. Set an iron post, 3 ft. long, 1 in. dia., 18 ins. in the ground, on bed rock, in mound of stone, for ¼ sec. cor., marked on brass cap	
51.60 62.42 83.60 86.40 86.62	<div style="text-align: center;"> <math display="block">\frac{1}{4} \text{ S } 7</math> <math display="block">\text{S18}</math> 1924 </div> <p>(No bearing trees available.) Deposit stone marked cross (X) at base of post. Along rocky S. slope. Asc. broken SW. slope 520 ft. to bottom of rim. Wire fence, brs SW. and NE. Asc. vertical rim, facing SW., 300 ft. Top of rim, brs NE. and SW. The cor. of secs. 7,8,17, and 18.</p>	
	Land, mountainous. Soil, rocky, 3rd rate. Timber, scattering juniper Undergrowth, mesquite, cat claw, palo verde, and cacti.	

Survey of the Subdivisions of T7S,R18E.

BOOK 3704

Chains.

N.0°03'W., bet. secs. 7 and 8.  
 Over mountainous land, through scattering timber and undergrowth.  
 Asc. 15 ft. over SW. slope.  
 2.00 Spur, slopes NW.; desc. 300 ft. over NW. slope.  
 9.00 Desc. over cliff, 160 ft. high, facing NW.  
 13.00 Canyon, course NW.; asc. 280 ft. over SW. slope.  
 21.00 Spur, slopes W.; desc. ; desc. broken NW. slope 500 ft. to  
 40.00 Set an iron post, 3 ft. long, 1 in. dia., 25 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$

(No bearing trees available)                      S 7 | S 8.

-1924

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
 Desc. 300 ft. over NW. slope.  
 48.50 Water trough, brs East, 1.00 chs. dist.  
 51.00 Enter horse corral.  
 51.50 Tin house brs West, 2.00 chs. dist.,  
 52.20 Leave corral.  
 56.70 Oak Spring Gulch, with stream of water in bottom, 10 lks. wide, 8 ins. deep, course N.65°E.; asc. 255 ft. over SE. slope.  
 57.60 Along E. slope.  
 72.00 Desc. 95 ft. over NE. slope.  
 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 28 ins. in the ground, for cor. of secs. 5,6,7, and 8, marked on brass cap

T7S R18E  
 S 6 | S 5  
 S 7 | S 8

-1924

from which  
 A live oak, 12 ins. dia., brs N.45 $\frac{1}{4}$ °E., 149 lks. dist., marked T7S R18E S5 BT.  
 A live oak, 6 ins. dia., brs S.7 $\frac{1}{2}$ °E., 391 lks. dist., marked T7S R18E S8 BT.  
 A mesquite, 12 ins. dia., brs S.80 $\frac{1}{4}$ °W., 249 lks. dist., marked T7S R18E S7 BT.  
 No other tree available.  
 Land, mountainous.  
 Soil, rocky, 3rd rate.  
 Timber, oak, mesquite, and oak.  
 Undergrowth, scrub oak, cacti, cat claw, mesquite.

---

S.89°52'E., on random line bet. secs. 5 and 8.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.90 Intersect the N. and S. line, 9 lks. S. of the cor. of secs. 4,5,8, and 9.  
 Thence  
 N.89°56'W., on true line bet. secs. 5 and 8.  
 Over mountainous land, through scattering timber and undergrowth.  
 Along N. slope.  
 4.50 Desc. 115 ft. over NW. slope.  
 8.95 Canyon, with stream of water 8 lks. wide, 5 ins. deep, which runs in the winter, course N.; asc. 410 ft. over E. slope.  
 28.00 Spur, slopes N.20°W.; desc. 230 ft. over SW. slope, to  
 39.95 Set an iron post, 3 ft. long, 1 in. dia., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap

Survey of the Subdivisions of T7S, R18E.

Chains

$\frac{1}{4}$  S 5  
S 8  
1924

from which

An oak, 6 ins. dia., brs S.  $19\frac{1}{2}^{\circ}$ W., 146 lks. dist.,  
marked  $\frac{1}{4}$  S8 BT.  
An oak, 8 ins. dia., brs N.  $58\frac{1}{2}^{\circ}$ W., 513 lks. dist.,  
marked  $\frac{1}{4}$  S5 BT.

- 40.90 Desc. 30 ft. over SW. slope.
- Ravine, course N.; asc. 30 ft. over NE. slope.
- 45.00 Ravine, course NE.; asc. 150 ft. over NE. slope.
- 56.80 Spur, slopes N.  $20^{\circ}$ W.; desc. 450 ft. over SW. slope.
- 68.00 Oak Spring Gulch, with stream, of water, 10 lks wide, 5 ins. in deep, in bottom, course N. Asc. 55 ft. over NE. slope.
- 74.00 Asc. 240 ft. over NE. slope, to
- 79.90 The cor. of secs. 5, 6, 7, and 8.

Land, mountainous.  
Soil, rocky, 3rd rate.  
Timber, scattering oak, juniper and cedar.  
Undergrowth, mesquite, cat claw, scrub oak, and cacti.

- 40.00 S.  $89^{\circ} 56'$ W., on random line bet. secs. 6 and 7.
- 86.46 Set temp.  $\frac{1}{4}$  sec. cor.
- Intersect the reestablished cor. of secs. 12, 6, 7 and 12, only of the NW. bdy. of the Tp., hereinbefore described.

Thence  
N.  $89^{\circ} 56'$ E., on true line bet. secs. 6 and 7.  
Over mountainous land, through scattering timber and undergrowth.

- Asc. 55 ft. over SW. slope.
- 5.36 Spur, slopes S.; desc. 190 ft. over SE. slope.
- 16.36 Canyon, course SW.; asc. 225 ft. over W. slope.
- 20.46 Short spur, slopes S.; desc. 95 ft. over SE. slope.
- 25.16 Ravine, course S.; asc. 95 ft. over SW. slope.
- 29.46 Short spur, slopes S.; desc. 130 ft. over SE. slope.
- 38.41 Ravine, course SW.; asc. 260 ft. over NW. slope, to
- 46.46 Set an iron post, 3 ft. long, 1 in. dia., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$  S 6  
S 7

No bearing trees available. 1924  
Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.  
Asc. 180 ft. over NW. slope.

- 66.46 Ridge, brs NW. and SE.; desc. 115 ft. over N. slope.
- 80.46 Head of ravine, course N.; asc. 30 ft. over W. slope.
- 84.57 Spur, slopes N.; desc. 40 ft. over NE. slope, to

86.46 The cor. of secs. 5, 6, 7, and 8,

Land, mountainous.  
Soil, rocky, 3rd rate.  
Timber, none.  
Undergrowth, mesquite, cat claw, palo verde, and cacti.

- 40.00 N.  $0^{\circ} 07'$ E., on random line bet. secs. 5 and 6.
- 84.60 Set temp.  $\frac{1}{4}$  sec. cor.
- Intersect the N. bdy. of the Tp., 7 lks. E. of the cor. of secs. 5, 6, 31, and 32. hereinbefore described.

Chains.

Thence  
 S.0°04'W., on true line bet. secs. 5 and 6.  
 Over mountainous land, through scattering timber and  
 undergrowth.  
 Desc. 220 ft. over SE. slope.  
 6.60 Canyon, with stream of water, 10 lks. wide, 4 ins. deep,  
 course W.; asc. 110 ft. over NE. slope.  
 12.60 Spur, slopes NW.; desc. 100 ft. over SW. slope.  
 14.70 Oak Spring Gulch, with stream of water in bottom, 15 lks.  
 wide, course NW. Asc. 315 ft., over NE. slope.  
 39.40 Thence along E. slope.  
 42.40 Desc. 35 ft. over SE. slope, to  
 44.60 Set an iron post, 3 ft. long, 1 in. dia., 22 ins. in the  
 ground, on bed rock, in mound of stone, for  $\frac{1}{4}$  sec.  
 cor., marked on brass cap

 $\frac{1}{4}$ 

S 6 | S 5

1924

from which

A live oak, 26 ins. dia., brs S.18 $\frac{1}{2}$ °E., 266 lks. dist.,  
 marked  $\frac{1}{4}$  S5 BT.

A cross (X) on over hanging cliff, brs N.18 $\frac{3}{4}$ °W., 119  
 lks. dist., marked (X) B0.

Desc. 40 ft. over rocky SE. slope.

47.60 Ravine, course NE.; asc. 410 ft. over NW. slope.

67.10 Spur, slopes N.; thence along E. slope.

84.60 The cor. of secs. 5, 6, 7, and 8.

Land, mountainous, rough.

Soil, rocky, 3rd rate.

Timber, scattering oak, juniper, cedar and pinyon.

Undergrowth, mesquite, cat claw, scrub oak, and cacti.

The continued satisfactory adjustment of the solaris  
 during the survey of this township is indicated from  
 field tests as described in books "H" and "I."

#### GENERAL DESCRIPTION

**LAND:** This township is rough and mountainous. A high  
 range of mountains including Table Mountain running  
 NW. and SE., through the center of Tp., with very  
 rough land E. of range and a little more rolling land,  
 W. of range.

**SOIL:** The soil is rocky and sandy, 3rd and 4th rate.

**TIMBER:** Scattering pinyon, juniper, oak, mesquite,  
 buck thorn, and cottonwood.

**UNDERGROWTH:** oak brush, greasewood, spanish dagger,  
 cacti, ocotilla, cat claw, and yucca.

**EVIDENCE OF MINERAL:** The Table Mountain mine and  
 stamp mill are in sec. 23 and there are also several  
 small prospect holes and mines along the east side  
 of the main mountain range.

Two patented lode mining claims in sec. 15.



Survey of the Subdivision lines of Township 7 South, Range 18 E. 55

**WATERING PLACES:** Oak Spring in sec. 8, Mud Springs in sec. 18, Willow Springs in sec. 29, and several other springs, and in Oak Springs Gulch; Virgus Canyon, Parsons Canyon, and a canyon in secs. 29 and 30. A great many of the gulches had running water in them at the time of the survey, but this happened to be the rainy season of the year.  
**SETTLEMENT:** Ranches in secs. 7, 13, 14 and 18.  
**INDUSTRY:** Stock grazing and Mining.

---

4-680

BOOK 3704

FIELD ASSISTANTS. to  
Theodore Vander Meer, U.S. Transitman,

NAMES.	CAPACITY.
Frank Lack,	1st chairman,
Earl Record,	2nd chairman,
Arthur Castelazo,	2nd chairman,
Clifford Hook,	cornerman,
Paul Bruno,	flagman.

CERTIFICATE OF UNITED STATES TRANSITMAN.

I, Theodore Vander Meer, U.S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 125, Arizona, bearing date of the 24th day of October, 19 23, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, <sup>re-</sup> surveyed all those parts or portions of the West boundary; and surveyed all those parts or portion of the East and North boundaries, and Subdivision lines of

TOWNSHIP 7 SOUTH, RANGE 18 EAST,

of the Gila and Salt River

Base and Meridian, in the State of Arizona, which are represented in and on diagram on page 1 hereof the foregoing field notes, as having been executed by me, and under my direction; and that all the corners of said resurvey and survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 125, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such resurvey and survey.

*June 5, 1925*  
*Theodore Vander Meer*  
 U.S. *Transitman*

~~APPROVAL.~~

~~OFFICE OF THE UNITED STATES SURVEYOR GENERAL,~~

~~-10~~

~~The foregoing field notes of the survey of~~

~~executed by~~  
~~under his special instructions dated~~ 10 ~~having been~~  
~~critically examined, and the necessary corrections and explanations made, the said field notes, and the survey~~  
~~they describe, are hereby approved.~~

~~U. S. Surveyor General~~

~~I certify that the foregoing transcript of the field notes of the above described survey in~~  
~~has been correctly copied from the original notes on file in this office.~~

~~U. S. Surveyor General~~

BOOK 3704

4-680

FIELD ASSISTANTS. to

Glenn F. Sawyer, U. S. Surveyor.

NAMES.	CAPACITY.
Ben Mollette	1st chainman.
Sterling Everett	2nd chainman.
J.H. Rust	Cornerman.
Arthur Castelazo	Flagman.
Frank Lack,	1st asst.
Earl Record	2nd asst.
Arthur Castelazo	3rd asst.
Clifford Hook	Cornerman.
Earl Hume	Flagman.

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Glenn F. Sawyer, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 125, Arizona, bearing date of the 24th day of October, 1923, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the East boundary, and

Subdivision lines of  
TOWNSHIP 7 SOUTH, RANGE 18 EAST.

of the Gila and Salt  
River Base and Meridian, in the State of Arizona, which are represented in and by diagram on page 1 hereof the foregoing field notes/as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 125, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Glenn F. Sawyer  
U. S. Surveyor.

APPROVAL.

San Francisco Calif  
Sept. 12 1924

OFFICE OF U. S. SUPERVISOR OF SURVEYS,  
U. S. DEPARTMENT OF THE INTERIOR, BUREAU OF LANDS

Denver, Colorado, March 20, 1926.

The foregoing field notes of the resurvey of  
Part of the West boundary; and survey of the  
East and North boundary, and  
Subdivision lines of  
TOWNSHIP 7 SOUTH, RANGE 18 EAST.  
of the Gila and Salt River Base and Meridian, in the State of Arizona,

executed by Glenn F. Sawyer, U.S. Surveyor and Theodore Vander Meer, U.S. Transitman, under ~~the~~ special instructions dated October 24, 1923, for Group 125, Arizona, 19 , having been critically examined, and the necessary corrections and explanations made, the said field notes, and the resurveys and surveys they describe, are hereby approved.

Walter J. Brown  
U. S. Supervisor of Surveys.

~~I certify that the foregoing transcript of the field notes of the above-described surveys in~~  
~~has been correctly copied from the original notes on file in this office.~~