

3706

Book "I"
4-679

BOOK 3706

FIELD NOTES

OF THE RETRACEMENT OF THE

East boundary, and

Part of the South boundary; and

OF THE RESURVEY OF

Part of the South boundary,

AND OF THE SURVEY OF THE

First Standard Parallel South, thru. part of Range 21 East,

West boundary, and

Subdivision lines,

ALL OF TOWNSHIP 6 SOUTH, RANGE 22 EAST,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

Glenn S. Sawyer, U.S. Surveyor.

In the capacity of U. S. Surveyor, under Special Instructions dated October 24, 1923 issued by the United States Surveyor General to govern surveys included in Group No. 125, Arizona, which were approved by the Commissioner of the General Land Office, November 3, 1923, and Assignment Instructions dated November 16, 1923.

Retracement, Resurvey and *Survey commenced* March 1, 1924.

Retracement, Resurvey and *Survey completed* March 22, 1924.

3706


3706

1A

Book "I"
Group 125 - - Arizona.

BOOK 3706

INDEX DIAGRAM.

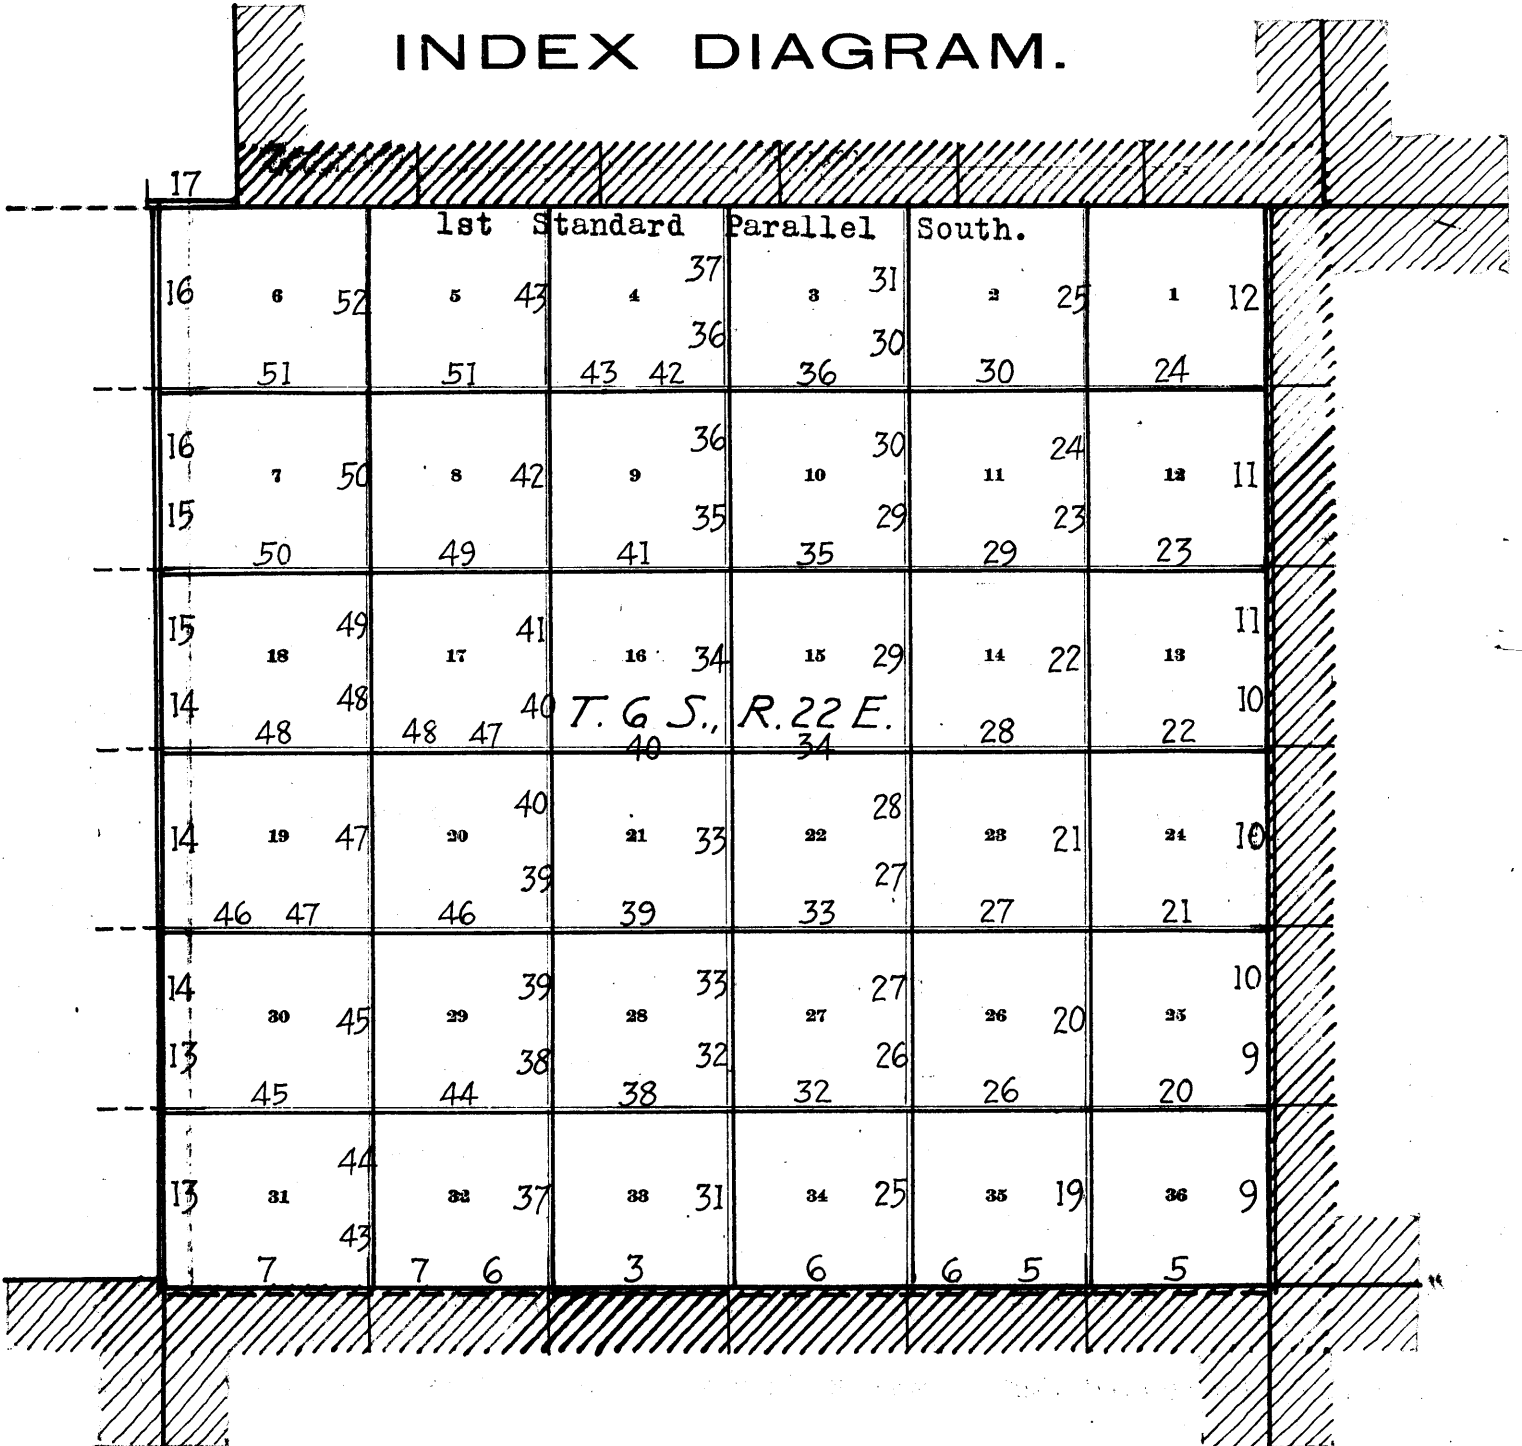

- Lines surveyed under this group.
- Lines resurveyed under this group.
- ==== Lines retraced under this group.
- Accepted surveys.
- Unsurveyed lines.
- //// Areas surveyed as per accepted plats on file.

BOOK 3706


Book "I"

Group 125 - Arizona.

Township 6 South, Range 22 East.

DATE DIAGRAM
1924.

First Standard Parallel South

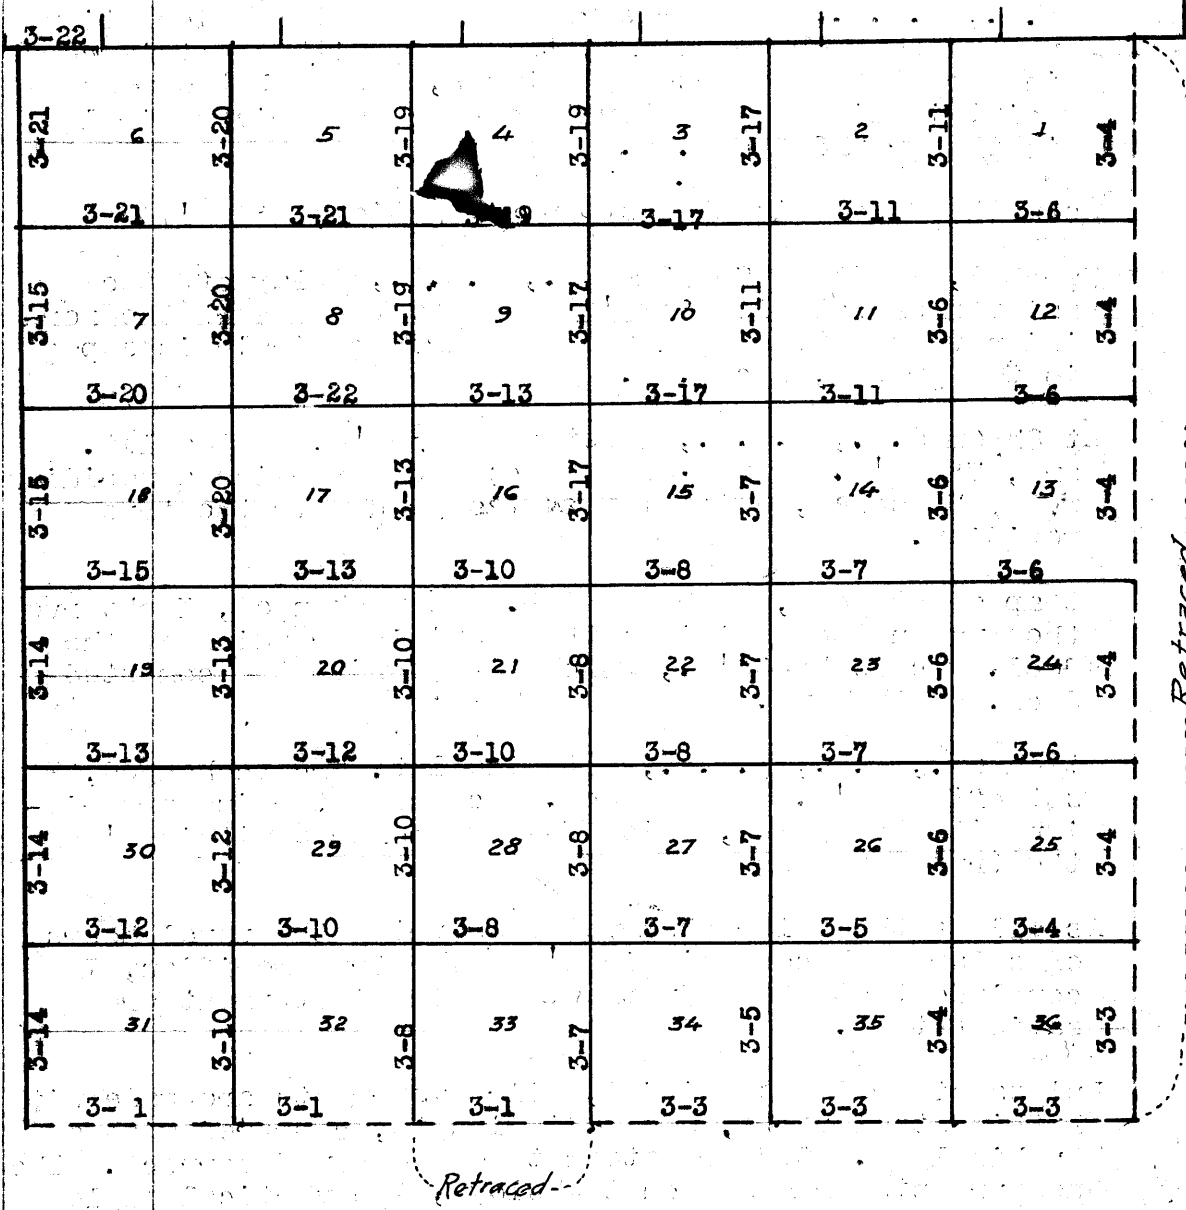

————— Indicates lines surveyed by Glenn F. Sawyer, U.S. Surveyor, on dates shown thereon.

- - - - - Indicates lines retraced or resurveyed by Glenn F. Sawyer, U.S. Surveyor, on dates shown thereon.

————— Indicates accepted Surveyed lines.

Retracements, Resurveys, and Surveys herein described were executed on dates shown on diagram on page 1 hereof, by Glenn F. Sawyer, U. S. Surveyor, using Young and Sons light mountain transit No. 8478, equipped with a full vertical circle and Smith solar attachment; unless otherwise specified, all azimuth determinations were accomplished with the solar attachment.

February 29, 1924: To examine the adjustments of the transit and find them correct; then, to test the solar apparatus, by comparing its indications, resulting from observations, made during a.m. and p.m. hours with a meridian established by Polaris observation, proceed as follows:

February 29, 1924: At camp near the cor. of secs. 7, 8, 17, and 18, T7S R22E., G. and S.R. Base and Meridian, Ariz., latitude $32^{\circ}49'51''$ N., longitude, $110^{\circ}7'21''$ W., at 8h. 56m. p.m., l.m.t., observe Polaris at western elongation, making four observations, two each with the telescope in direct and reversed positions, and mark the mean point in line thus determined on a peg driven firmly in the ground 5 chs. N.

Azimuth of Polaris at western elongation, $1^{\circ}18'29''$ W.

March 1, 1924; At 7h 45m a.m., l.m.t., lay off the azimuth of Polaris $1^{\circ}18\frac{1}{2}'$ to the east and mark the meridian thus determined by a tack driven firmly in a peg in the ground, 6 chs. N.

At 8h 0m a.m., l.m.t., set off $32^{\circ}50'$ N. on the lat. arc, $7^{\circ}29\frac{1}{2}'$ S. on the decl. arc; and determine a meridian with the solar, which agrees with the true meridian.

At apparent noon, with the lat. arc unchanged, observe the sun on the meridian; the resulting reading of the decl. arc is $7^{\circ}26\frac{1}{2}'$ S., which agrees with the computed decl. of the sun.

At 4h 0m., p.m., l.m.t., with the lat. arc unchanged, set off $7^{\circ}22'$ S. on the decl. arc and determine a meridian with the solar, which agrees within 4' with the true meridian.

As all of the solar observations during the usual hours of solar work come within 1' of the true meridian, conclude that the adjustments of the instrument are satisfactory.


Unless otherwise specified, all measurements are made with Lufkin steel tapes, 5 chs. in length, compared with a Lufkin 1 ch. standard steel tape and found correct. The measurements are made on the slope, the vertical angle determined and the slope measurements properly reduced to true horizontal distances.

Retracement of part of South bdy. of Township 6 South, Range 22 East. 3

Chains.

The south boundary of T.6 S., R.22 E., was surveyed in 1886 by C.H. Wallace, U.S.D.S., establishing all sec. and 1/4 sec. cor. monuments thereon with a common reference to areas on both sides of the line. No retracement or resurvey of this Tp. boundary is of record.

The following notes describe a retracement of the line between secs. 4 and 33.



The original cor. of secs. 3, 4, 33 and 34, Ts. 6 and 7 S., R. 22 E. is a granite stone 8x6x6 ins. above ground, firmly set, marked with 3 notches on each of E. and W. faces, and witnessed by a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor. No bearing trees.

The cor. monument retains its original reference, and being in good condition, and properly marked and witnessed for such reference, no reconstruction or alteration of same is required.

Thence, N. 89° 27' W. on random line, bet. secs. 4 and 33. (E. 1/2). Over rolling land, thru. scattering undergrowth. Ascend 142 ft., over NE. slope to 1/4 sec. cor.

27.78 Wash, 30 lks. wide, course NE.

40.07 Fall 20 lks. S. of the original 1/4 sec. cor. of secs. 4 and 33, which is a granite stone, 10x8x8 ins. above ground, firmly set, marked 1/4 on N. face, and witnessed by a mound of stone 2 ft. base, 1 1/2 ft. high, N. of cor. No bearing trees. This cor. monument retains its original reference, and being in good condition, and properly marked and witnessed for such reference, no reconstruction or alteration of same is required.

True course and distance of E. 1/2 of line, bet. secs. 4 and 33, are therefore N. 89° 10' W., 40.07 chs.

Thence, N. 89° 27' W., on random line, bet. secs. 4 and 33 (W. 1/2). Over rolling land, thru. scattering undergrowth. Ascend 144 ft., over NE. slope to sec. cor.

8.20 Wash, 20 lks. wide, course NE.


31.67 Wash, 40 lks. wide, course NE.

40.18 Fall 25 lks. S. of the original cor. of secs. 4, 5, 32 and 33, which is a granite stone, 10x10x8 ins. above ground, firmly set, marked with 2 notches on W. face, and 4 notches on E. face, and witnessed by a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor. No bearing trees.

This cor. monument retains its original reference, and being in good condition and properly marked and witnessed for such reference, no reconstruction or alteration of same is required.

True course and distance of W. 1/2 of line, bet. secs. 4 and 33 are therefore N. 89° 6' W., 40.18 chs.

Land, rolling.
Soil, sandy and gravelly, 2nd and 3rd rate.
Timber, none.
Undergrowth, greasewood, yucca and catclaw.



BOOK 3706

4 Resurvey of part of South bdy. of Township 6 South, Range 22 East.

Chains.

The South bdy. of T. 6 S., R. 22 E. was surveyed in 1886 by C. H. Wallace, U. S. D. S., establishing all sec. and $\frac{1}{4}$ sec. cors. thereon with a common reference to areas on both sides of the line. No retracement or resurvey of this Tp. bdy. is of record. The following notes describe a resurvey of the west 2 miles, and the East 3 miles of the line, reconstructing defective cors., and reestablishing missing cors. by proportion, but retaining the original common reference of all sec. and $\frac{1}{4}$ sec. cors.

Retracement for Resurvey.

From the cor. of Ts. 6 and 7 S., R. 22 E., hereinafter described,

- S. $89^{\circ}27'E.$, on random line, bet. secs. 6 and 31.
 51.47 Diligent search in this vicinity fails to reveal any trace of original $\frac{1}{4}$ sec. cor. of secs. 6 and 31. Set temp. cor.
 91.89 Fall 91 lks. N. of the original cor. of secs. 5, 6, 31 and 32, hereinafter described.

True course and distance of line bet. secs. 6 and 31 are therefore N. $88^{\circ}53'W.$, 91.90 chs., which to maintain original proportion bet. the cor. intervals gives 51.72 chs. for the $W.\frac{1}{2}$, and 40.18 chs., for the $E.\frac{1}{2}$ of the line.

- S. $89^{\circ}27'E.$, on random line, bet. secs. 5 and 32 ($W.\frac{1}{2}$).
 40.04 Fall 25 lks. N. of the original $\frac{1}{4}$ sec. cor. of secs. 5 and 32, hereinafter described.

True course and dist. of $W.\frac{1}{2}$ of line, bet. secs. 5 and 32 are therefore N. $89^{\circ}6'W.$, 40.04 chs.

Thence,

- S. $89^{\circ}27'E.$, on random line, bet. secs. 5 and 32 ($E.\frac{1}{2}$).
 40.12 Fall 24 lks. N. of the original cor. of secs. 4, 5, 32 and 33, hereinbefore described.

True course and dist. of $E.\frac{1}{2}$ of line, bet. secs. 5 and 32 are therefore N. $89^{\circ}7'W.$, 40.12 chs.

 From the original cor. of secs. 3, 4, 33 and 34, hereinbefore described,

- S. $89^{\circ}27'E.$, on random line, bet. secs. 3 and 34 ($W.\frac{1}{2}$).
 40.00 Fall 13 lks. N. of the original $\frac{1}{4}$ sec. cor. of secs. 3 and 34, hereinafter described.

True course and dist. of $W.\frac{1}{2}$ of line, bet. secs. 3 and 34 are therefore N. $89^{\circ}16'W.$, 40.00 chs.

Thence,

- S. $89^{\circ}27'E.$, on random line, bet. secs. 3 and 34 ($E.\frac{1}{2}$).
 40.00 Diligent search in this vicinity fails to reveal any trace of the original cor. of secs. 2, 3, 34 and 35. Set temp. cor. of said secs.

 From temp. sec. cor.,

- S. $89^{\circ}27'E.$, on random line, bet. secs. 2 and 35.
 40.00 Diligent search in this vicinity fails to reveal any trace of original $\frac{1}{4}$ sec. cor. of secs. 2 and 35. Set temp. cor.

- 80.45 Fall 66 lks. N. of the original cor. of secs. 1, 2, 35 and 36, hereinafter described.

True course and dist. of Tp. bdy. back to $\frac{1}{4}$ sec. cor. of secs. 3 and 34 are therefore N. $89^{\circ}8'W.$, 120.45 chs., which, to maintain original proportion bet. cor. intervals gives three intervals of 40.15 chs. each for the reestablishment of the missing cors.

- S. $89^{\circ}27'E.$, on random line, bet. secs. 1 and 36 ($W.\frac{1}{2}$).
 40.14 Fall 24 lks. S. of the original $\frac{1}{4}$ sec. cor. of secs. 1 and 36.

Resurvey of part of South bdy. of Township 6 South, Range 22 East, 5


Chains.

hereinafter described.
 True course and dist. of W. $\frac{1}{2}$ of line, bet. secs. 1 and 36, are therefore N. 89° 48' W., 40.14 chs.
 Thence,
 S. 89° 27' E., on random line, bet. secs. 1 and 36 (E. $\frac{1}{2}$).
 40.05 Fall 14 lks. S. of the original cor. of Ts. 6 and 7 S., Rs. 22 and 23 E., hereinafter described.
 True course and dist. of E. $\frac{1}{2}$ of line, bet. secs. 1 and 36 are therefore, N. 89° 39' W., 40.05 chs.

RESURVEY.

The original cor. of Ts. 6 and 7 S., Rs. 22 and 23 E., established by L. Wolfley, U.S.D.S. in 1884, is a granite stone, 12x10x8 ins. above ground, firmly set, marked with 6 notches on each of N., S., E. and W. faces. No accessories. No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

Thence,
 N. 89° 39' W., on true line, bet. secs. 1 and 36 (E. $\frac{1}{2}$).
 Over level land, thru. very scattering timber and scattering undergrowth.
 40.05 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 1 and 36, which is a stake, 2 ins. square, projecting 16 ins. above ground, marked $\frac{1}{4}$ on N. face. No accessories.
 Reconstruct this cor. monument as follows: Alongside old stake, set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 1 and 36, marked on brass cap,




No bearing trees available. Dig pits, 18x18x12 ins., one each E. and W. of post, 3 ft. dist.

Thence,
 N. 89° 48' W., on true line, bet. secs. 1 and 36 (W. $\frac{1}{2}$).
 Over level land, thru. very scattering timber and scattering undergrowth.

40.14 Intersect the original cor. of secs. 1, 2, 35 and 36, which is a stake 2 ins. square, projecting 12 ins. above ground, firmly set, marked with 1 groove on E. face, and 5 grooves on W. face. No accessories. Reconstruct this cor. mon. as follows:


Alongside old stake, set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 1, 2, 35 and 36, marked on brass cap,



No bearing trees available. Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Land, level.
 Soil, sandy loam, 2nd rate.
 Timber, mesquite.
 Undergrowth, scrub mesquite, greasewood, yucca and catclaw.

N. 89° 8' W., on true line, bet. secs. 2 and 35.
 Over level land, thru. scattering timber and undergrowth.
 9.95 Highway, brs. S. 55° W. to Wilcox, and N. 55° E. to Safford.
 24.45 Wash, 50 lks. wide, course NE. from the W.; follow up same.
 40.15 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 2 and 35, marked on brass cap,



from which,

BOOK 3708

Resurvey of part of South bdy. of Township 6 South, Range 22 East.

Chains.

80.30	<p>A mesquite, 6 ins. in diam., brs. N. 11° W., 19 lks. dist., marked $\frac{1}{4}$S 35 BT.</p> <p>A catclaw, 4 ins. in diam., brs. S. 54° W., 55 lks. dist., marked $\frac{1}{4}$S 2 BT.</p> <p>Continue up small wash, course E.</p> <p>(Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for reestablished cor. of secs. 2, 3, 34 and 35, marked on brass cap,</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr><td>T6S</td><td>R22E</td></tr> <tr><td>S34</td><td>S35</td></tr> <tr><td>S 3</td><td>S 2</td></tr> <tr><td colspan="2" style="text-align: center;">T7S</td></tr> <tr><td colspan="2" style="text-align: center;">1924</td></tr> </table> <p>from which,</p> <p>A mesquite, 6 ins. in diam., brs. S. 16$\frac{1}{2}$° E., 100 lks. dist., marked T7S R22E S2 BT.</p> <p>A mesquite, 6 ins. in diam., brs. S. 58° W., 43 lks. dist., marked T7S R22E S3 BT.</p> <p>A mesquite, 10 ins. in diam., brs. N. 37° W., 60 lks. dist., marked T6S R22E S34 BT.</p> <p>No other bearing trees available.</p> <p>Land, level. Soil, sandy, 1st and 2nd rate.</p> <p>Timber, mesquite and catclaw.</p> <p>Undergrowth, greasewood, yucca and catclaw.</p>	T6S	R22E	S34	S35	S 3	S 2	T7S		1924	
T6S	R22E										
S34	S35										
S 3	S 2										
T7S											
1924											
29.00 40.15	<p>N. 89° 8' W., on true line, bet. secs. 3 and 34 (E. $\frac{1}{4}$).</p> <p>Over gently rolling land, thru. scattering undergrowth.</p> <p>Follow up irregular wash, course E.</p> <p>Same wash from NW., course E.</p> <p>Intersect the original $\frac{1}{4}$ sec. cor. of secs. 3 and 34, which is a charred stake, 2 ins. square, 12 ins. long, marked $\frac{1}{4}$ on N. side, and firmly set in a small mound of stone.</p> <p>No accessories.</p> <p>Reconstruct this cor. monument as follows: Remove the mound of stone, reset old stake in same position, 9 ins. in the ground, and alongside same set an iron post 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 3 and 34, marked on brass cap,</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr><td>$\frac{1}{4}$ S</td><td>34</td></tr> <tr><td>S</td><td>3</td></tr> <tr><td colspan="2" style="text-align: center;">1924</td></tr> </table>	$\frac{1}{4}$ S	34	S	3	1924					
$\frac{1}{4}$ S	34										
S	3										
1924											
0.40 40.00	<p>No bearing trees available, Raise a mound of stone, 2 ft. base, 1$\frac{1}{2}$ ft. high, N. of cor.</p> <p>Thence</p> <p>N. 89° 16' W., on true line, bet. secs. 3 and 34 (W. $\frac{1}{4}$).</p> <p>Over gently rolling land, thru. scattering undergrowth.</p> <p>Wash, 40 lks. wide, course N. 20° E. Asc. 125 ft., over NE. slope, to</p> <p>Intersect the original cor. of secs. 3, 4, 33 and 34, hereinbefore described.</p> <p>Land, gently rolling.</p> <p>Soil, sandy, 3rd rate.</p> <p>Timber, none.</p> <p>Undergrowth, greasewood, scrub mesquite, yucca and catclaw.</p>										
22.30 29.90 34.90 40.12	<p>From the original cor. of secs. 4, 5, 32 and 33, hereinbefore described,</p> <p>N. 89° 7' W., on true line, bet. secs. 5 and 32 (E. $\frac{1}{4}$).</p> <p>Over rolling land, thru. scattering undergrowth.</p> <p>Ascend 64 ft., over NE. slope.</p> <p>Descend 78 ft., over NW. slope.</p> <p>Wash, 100 lks. wide, course N.</p> <p>Ascend 68 ft., over NE. slope, to $\frac{1}{4}$ sec. cor.</p> <p>Gully, course NE.</p> <p>Intersect the original $\frac{1}{4}$ sec. cor. of secs. 5 and 32, which is a granite stone, 10x12x10 ins. above ground, firmly set, marked $\frac{1}{4}$ on N. face. No accessories. Reconstruct this cor. monument as follows: Alongside old stone, set an iron post, 3 ft. long, 1 in. in diam., 5 ins. in the ground to bed rock, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor. of secs. 5 and 32, marked on brass cap,</p>										

Resurvey of part of South bdy. of Township 6 South, Range 22 East. 7

Chains.

 $\frac{1}{4}$ S 32

S 5

1924

No bearing trees available.
 Thence,
 N.89°6'W., on true line, bet. secs. 5 and 32 (W. $\frac{1}{2}$).
 Over rolling land, thru. scattering undergrowth.
 Ascend 80 ft., over broken NE. and N. slopes to sec. cor.
 25.84 Wash, 40 lks. wide, course N.
 38.74 Wash, 40 lks. wide, course N.
 40.04 Intersect the original cor. of secs. 5, 6, 31 and 32, which
 is a quartzite stone, 12x10x10 ins. above ground, firmly
 set, marked with 1 notch on W face and 5 notches on E.
 face, and witnessed by a mound of stone, 2 ft. base, 1 $\frac{1}{2}$
 high, W. of cor. No bearing trees.
 This cor. monument retains its original reference, and being
 in good condition and properly marked and witnessed for
 such reference, no reconstruction or alteration of same
 is required.
 Land, rolling.
 Soil, sandy and gravelly, 2nd and 3rd rate.
 Timber, none.
 Undergrowth, greasewood, yucca and catclaw.

N.88°53'W., on true line, bet. secs. 6 and 31.
 Over rolling land, thru. scattering timber and undergrowth.
 Ascend 47 ft., over E. slope.
 8.90 Spur, slopes N.
 Descend 35 ft., over W. slope.
 15.40 Shallow wash, 40 lks. wide, course N.
 Ascend 60 ft., over E. slope.
 25.43 Low spur, slopes N.
 Descend 20 ft., over W. slope.
 34.50 Shallow wash, 100 lks. wide, course N.
 Ascend 30 ft., over NE. slope, to
 40.18 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in
 diam., 27 ins. in the ground, for reestablished $\frac{1}{4}$ sec.
 cor. of secs. 6 and 31, marked on brass cap,

 $\frac{1}{4}$ S 31

S 6

1924

from which,
 A mesquite, 6 ins. in diam., brs. N.57°W., 173 lks.
 dist., marked $\frac{1}{4}$ S 31 BT.
 A mesquite, 6 ins. in diam., brs. S.8 $\frac{1}{2}$ °E., 214 lks.
 dist., marked $\frac{1}{4}$ S 6 BT.
 Ascend 30 ft., over NE. slope.
 48.20 Low spur, slopes N.
 Descend 25 ft., over NW. slope.
 56.70 Road brs. N. to Moody's ranch, and S. to main highway.
 59.70 Wash, 100 lks. wide, course N.
 Ascend 28 ft., over E. slope, to
 65.90 Foot of spur, brs. NE. and SW. Enter mountainous land,
 Ascend 330 ft., over SE. slope.
 83.90 Spur, slopes NE.
 Ascend 42 ft., over N. slope, to
 91.90 Intersect the cor. of Ts. 6 and 7 S., R. 22 E., which is a
 large granite boulder in place, exposed 20x10x8 ft.,
 marked with a cross (x) on top, and 6 notches on N., S.
 and E. of cross, and witnessed by a mound of stone 3 ft.
 base, 2 ft. high, W. of cor. No bearing trees.
 This cor. monument was established in 1886 by C.H. Wallace,
 U.S.D.S. to refer to 4 townships, and altered in 1915
 by T.B. Matthews, U.S.S. to its present designation and
 description. As the mound of stone is in improper
 position, move same from W. to E. of cor.
 From this cor., Moody's goat ranch (upper ranch) brs. N.47°E.

BOOK 3706

8 Resurvey of part of South boundary of Township 6 South, Range 22 E.


Chains.

Land, rolling, and mountainous.
Soil, sandy and rocky, 3rd and 4th rate.
Timber, mesquite.
Undergrowth, catclaw, greasewood and yucca.


Retracement of East bdy. of Township 6 South Range 22 East. 9

Chains.

The East bdy. of T.6 S., R.22 E. was surveyed in 1900 by P. Contzen, U.S.D.S., establishing all sec. and 1/4 sec. cors. thereon, with a common reference to areas on both sides of the line. No retracement or resurvey of this range line is of record. The following notes describe a retracement of the entire line.



From the original cor. of Ts. 6 and 7 S., Rs. 22 and 23 E., hereinbefore described,
 North, on random line, bet. secs. 31 and 36 (S. 1/4).
 Over level land, thru. scattering timber and undergrowth.
 40.23 Fall 6 lks. E. of the original 1/4 sec. cor. of secs. 31 and 36, which is a granite stone, 12x10x3 ins. above ground, firmly set, marked 1/4 36 on W. face, and 31 on E. face, and witnessed by two bearing trees as follows:
 A mesquite, 10 ins. in diam., N. 42° E., 163 lks. dist., marked 1/4 S 31 BT.
 A mesquite, 12 ins. in diam., S. 55 1/2° W., 219 lks. dist., marked 1/4 S 36 BT+
 True course and dist. of S. 1/4 of line, bet. secs. 31 and 36, are therefore N. 0° 5' W., 40.23 chs.
 Thence,
 North, on random line, bet. secs. 31 and 36 (N. 1/4).
 Over level land, thru. scattering timber and undergrowth.
 2.90 Highway brs. NE. to Safford and SW. to Wilcox.
 10.80 Old road, brs. N. 15° E. and S. 15° W.
 16.50 Five strand wire fence, brs. E. and W.
 40.21 Fall 6 lks. E. of the original cor. of secs. 25, 30, 31 and 36, which is a quartzite stone, 10x8x8 ins. above ground, firmly set, marked with 1 notch on S. face, and 5 notches on N. face, and witnessed by four bearing trees as follows:
 A mesquite, 6 ins. in diam., N. 20° E., 91 lks. dist., marked T6S R23E S30 BT.
 A mesquite, 8 ins. in diam., S. 61 1/4° E., 229 lks. dist., marked T6S R23E S31 BT.
 A mesquite, 10 ins. in diam., S. 5 1/2° W., 156 lks. dist., marked T6S R22E S36 BT.
 A mesquite, 8 ins. in diam., N. 42 3/4° W., 307 lks. dist., marked T6S R22E S25 BT.
 True course and dist. of N. 1/4 of line bet. secs. 31 and 36 are therefore, N. 0° 5' W., 40.21 chs.
 Land, level.
 Soil, sandy loam, 2nd rate.
 Timber, mesquite.
 Undergrowth, greasewood, yucca and catclaw.



North, on random line, bet. secs. 25 and 30 (S. 1/4).
 Over level land, thru. scattering timber and undergrowth.
 12.50 Old windmill brs. E., 3.00 chs. dist.
 14.10 Fence, brs. E. and W.
 14.80 Old road, brs. E. and W.
 20.00 Wash, 6 lks. wide, course NE.
 29.00 Wash, 15 lks. wide, course NE.
 40.16 Fall 6 lks. E. of the original 1/4 sec. cor. of secs. 25 and 30, which is a granite stone, 10x8x8 ins. above ground, firmly set, marked 1/4 S 25 on W. face and 30 on E. face, and witnessed by two bearing trees as follows:
 A mesquite, 10 ins. in diam., N. 81 3/4° E., 53 lks. dist., marked 1/4 S 30 BT.
 A mesquite, 10 ins. in diam., S. 49 3/4° W., 106 lks. dist., marked 1/4 S 25 BT.
 True course and dist. of S. 1/4 of line, bet. secs. 25 and 30, and therefore, N. 0° 5' W., 40.16 chs.
 Thence,
 North, on random line, bet. secs. 25 and 30 (N. 1/4).
 Over level land, thru. scattering timber and undergrowth.
 4.00 Wash, 10 lks. wide, course NE.

BOOK 3706

10 Retracement of East bdy. of Township 6 South, Range 22 East.

Chains.

11.00 Wash, 10 lks. wide, course NE.
 15.30 Wash, 15 lks. wide, course NE.
 25.30 Wash, 20 lks. wide, course NE.
 39.50 Wash, 25 lks. wide, course NE.
 40.04 Intersect the original cor. of secs. 19, 24, 25 and 30,

which is a granite stone, 10x8x8 ins. above ground, firmly set, marked with 4 notches on N. face, and 2 notches on S. face, and witnessed by four bearing trees as follows:

A mesquite, 9 ins. in diam., N. 78° W., 116 lks.

dist., marked T6S R23E S19 BT.

A mesquite, 10 ins. in diam., S. 37° E., 60 lks.

dist., marked T6S R23E S30 BT.

A mesquite, 7 ins. in diam., S. 10° W., 10 lks.

dist., marked T6S R22E S25 BT.

A mesquite, 10 ins. in diam., N. 12½° W., 82 lks.

dist., marked T6S R22E S24 BT.

True course and dist. of N. ¼ of line, bet. secs. 25 and 30, are therefore North, 40.04 chs.

Land level. Soil, sandy loam, 2nd rate.

Timber, mesquite.

Undergrowth, greasewood, yucca and catclaw.

20.20
 24.50
 31.00
 40.05

North, on random line, bet. secs. 19 and 24 (S. ¼).

Over level land, thru. scattering timber and undergrowth.

Old road, brs. E. and W.

Old road, brs. NE and SW., in wash, 15 lks. wide, course NE.

Wash, 15 lks. wide; course E.

Fall 10 lks. E. of the original ¼ sec. cor. of secs. 19 and 24, which is a granite stone, 12x10x8 ins. above ground, firmly set, marked ¼ S 24 on W. face, and S 19 on E. face, and witnessed by two bearing trees as follows:

A mesquite, 8 ins. in diam., N. 57½° E., 32 lks.

dist., marked ¼ S 19 BT.

A mesquite, 8 ins. in diam., N. 26° W., 32 lks.

dist., marked ¼ S 24 BT.

True course and dist. of S. ¼ of line, bet. secs. 19 and 24, are therefore N. 0° 9' W., 40.05 chs.

Thence,

North, on random line, bet. secs. 19 and 24 (N. ¼).

Over level land, thru. scattering timber and undergrowth.

Wash, 15 lks. wide, 1 ft. deep, course NE.

Wash, 20 lks. wide, course NE.

Wash, 20 lks. wide, course N. 80° E.

0.70
 10.20
 37.40
 40.08

Fall 5 lks. E. of the original cor. of secs. 13, 18, 19 and 24, which is a granite stone, 10x8x5 ins. above ground, firmly set, marked with 3 notches on each of N. and S. faces, and witnessed by four bearing trees as follows:

A mesquite, 8 ins. in diam., N. 12° E., 163 lks.

dist., marked T6S R23E S18 BT.

A mesquite, 8 ins. in diam., S. 60° E., 130 lks.

dist., marked T6S R23E S19 BT.

A mesquite, 12 ins. in diam., S. 72½° W., 147 lks.

dist., marked T6S R22E S24 BT.

A mesquite, 10 ins. in diam., N. 3¼° W., 129 lks.

dist., marked T6S R22E S13 BT.

True course and dist. of N. ¼ of line, bet. secs. 19 and 24 are therefore, N. 0° 4' W., 40.08 chs.

Land level.

Soil, sandy loam, 2nd rate.

Timber, mesquite.

Undergrowth, greasewood, catclaw and cacti.

35.20
 40.18

North, on random line, bet. secs. 13 and 18 (S. ¼).

Over level land, thru. scattering timber and undergrowth.

Wash, 15 lks. wide, course NE.

Fall 3 lks. E. of the original ¼ sec. cor. of secs. 13 and 18, which is a granite stone, 8x8x8 ins. above ground, firmly set, marked ¼ S 13 on W. face, and S 18 on E. face, and

Retracement of East bdy. of Township 6 South, Range 22 East. 11

Chains.

witnessed by two bearing trees as follows:
A mesquite, 8 ins. in diam., N. 25 1/2° W., 60 lks.
dist., marked 1/4 S 13 BT.
A mesquite, 8 ins. in diam., N. 89° E., 106 lks.
dist., marked 1/4 S 18 BT.

True course and dist. of S. 1/2 of line, bet. secs. 13 and 18
are therefore N. 0° 3' W., 40.18 chs.

Thence,

North, on random line, bet. secs. 13 and 18. (N. 1/2).

Over level land, thru. scattering timber and undergrowth.

8.00 Center of shallow wash, 400 lks. wide, with several channels,
course N. 70° E.

38.00 Wash, 10 lks. wide, course NE.

38.50 Old road, brs. E. and W.

40.16 Fall 7 lks. E. of the original cor. of secs. 7, 12, 13 and
18, which is a granite stone, 12x12x10 ins. above ground,
firmly set, marked with 4 notches on S. face and 2
notches on N. face, and witnessed by four bearing trees
as follows:

A mesquite, 8 ins. in diam., N. 23 1/2° E., 219 lks.
dist., marked T6S R23E S7 BT.

A mesquite, 11 ins. in diam., S. 85 1/4° E., 123 lks.
dist., marked T6S R23E S18 BT.

A mesquite, 11 ins. in diam., S. 26° W., 93 lks.
dist., marked T6S R22E S13 BT.

A mesquite, 7 ins. in diam., N. 30 1/2° W., 33 lks.
dist., marked T6S R22E S12 BT.

True course and dist. of N. 1/2 of line bet. secs. 13 and 18
are therefore, N. 0° 6' W., 40.16 chs.

Land, level.

Soil, sandy, 2nd rate.

Timber, mesquite.

Undergrowth, greasewood, yucca and catclaw.

North, on random line, bet. secs. 7 and 12 (S. 1/2).

Over level land, thru. scattering timber and undergrowth.

15.10 Wash, 20 lks. wide, course NE.

20.50 Center of wash, 200 lks. wide, course NE.

36.00 Wash, 20 lks. wide, course NE.

40.15 Fall 3 lks. W. of the original 1/4 sec. cor. of secs. 7 and 12,
which is a granite stone, 8x8x6 ins. above ground,
firmly set, marked 1/4 S 12 on W. face and S 7 on E. face,
and witnessed by two bearing trees as follows:

A mesquite, 7 ins. in diam., N. 22 3/4° W., 79 lks.
dist., marked 1/4 S 12 BT.

A mesquite, 10 ins. in diam., S. 86 1/4° E., 79 lks.
dist., marked 1/4 S 7 BT.

True course and dist. of S. 1/2 of line, bet. secs. 7 and 12
are therefore, N. 0° 3' E., 40.15 chs.

Thence,

North, on random line, bet. secs. 7 and 12 (N. 1/2).

Over level land, thru. scattering timber and undergrowth.

16.50 Wash, 10 lks. wide, course N. 80° E.

21.04 Wash, 25 lks. wide, course NE.

25.30 Old road, brs. NE. and SW.

27.70 Wash, 30 lks. wide, course N. 80° E.

40.13 Fall 4 lks. W. of the original cor. of secs. 1, 6, 7 and 12,
which is a granite stone, 10x6x6 ins. above ground,
firmly set, marked 5 notches on S. face and 1 notch on
N. face, and witnessed by two bearing trees as follows:

A mesquite, 8 ins. in diam., S. 52° W., 46 lks.
dist., marked T6S R22E S12 BT.

A mesquite, 5 ins. in diam., N. 72 1/4° W., 80 lks.
dist., marked T6S R22E S1 BT.

and two pits, one each NE. and SE. of cor. 5 1/2 ft. dist.

True course and dist. of N. 1/2 of line, bet. secs. 7 and 12
are therefore N. 0° 3' E., 40.13 chs.

Land, level.

Soil, sandy, 2nd rate.

Timber, mesquite.

Undergrowth, greasewood, yucca and catclaw.

BOOK 3708

12 Retracement of East bdy. of Township 6 South, Range 22 East.

Chains.

25.30

40.18

North, on random line, bet. secs. 1 and 6 ($S. \frac{1}{2}$).
Over level land, thru. scattering timber and undergrowth.
Dm road, brs. NE. and SW.

Fall 5 lks. E. of the original $\frac{1}{4}$ sec. cor. of secs. 1 and 6,
which is a granite stone, 8x6x6 ins. above ground,
firmly set, marked $\frac{1}{4}$ S 10 on W. face and S6 on E. face,
and witnessed by two bearing trees as follows:

A mesquite, 11 ins. in diam., S. $27\frac{1}{2}^{\circ}$ E., 198 lks.
dist., marked $\frac{1}{4}$ S 6 BT.

A mesquite, 11 ins. in diam., S. 5° W., 254 lks.
dist., marked $\frac{1}{4}$ S 1 BT.

True course and dist. of $S. \frac{1}{2}$ of line, bet. secs. 1 and 6,
are therefore, N. $0^{\circ} 4'$ W., 40.18 chs.

Thence,

North, on random line, bet. secs. 1 and 6. ($N. \frac{1}{2}$).

Over level land, thru. scattering timber and undergrowth.

4.40

20.00

35.64

Wash, 20 lks. wide, course NE.

Wash, 40 lks. wide, course NE.

Fall 4 lks. E. of the original closing cor. of T. 6 S., R. 22
and 23 E. on the 1st Std. Par. S., which is a granite stone,
14x10x6 ins. above ground, firmly set, marked with 6
notches on each of E., W. and S. faces, and CC on S. face,
and witnessed by two bearing trees as follows:

A mesquite, 8 ins. in diam., S. $50\frac{1}{2}^{\circ}$ E., 99 lks.
dist., marked T6S R23E S6 CC BT.

A mesquite, 8 ins. in diam., S. 24° W., 39 lks.
dist., marked T6S R22E S1 CC BT.

True course and dist. of $N. \frac{1}{2}$ of line, bet. secs. 1 and 6
are therefore, N. $0^{\circ} 4'$ W., 35.64 chs.

Land, level.

Soil, sandy loam, 2nd rate.

Timber, mesquite.

Undergrowth, greasewood, yucca and catclaw.

Survey of West boundary of Township 6 South, Range 22 East. 13

Chains.	From the cor. of Ts. 6 and 7 S., R. 22 E., hereinbefore described, North, on true line, on W. bdy. of sec. 31. Over mountainous land, thru. scattering timber and undergrowth. Descend 30 ft., over N. slope, to				
1.05	Intersect the cor. of Ts. 6 and 7 S., R. 21 E., reestablished by T.B. Matthews, U.S.S. in 1915, which is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by a mound of stone W. of cor. No bearing trees.				
18.20	Descend 280 ft., over N. slope. Bottom of gulch, 30 lks. wide, course N. 70° E.; thence along rolling E. slope.				
25.90	Wire fence, brs. E. and W. SW. cor. of field brs. W., 4 chs. dist.				
33.34	(40.00 chs. S. of the cor. of secs. 30 and 31) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 31 only, marked on brass cap, <div style="text-align: center;"> <table border="1"> <tr><td>T6S</td></tr> <tr><td>R22E</td></tr> <tr><td>S30</td></tr> <tr><td>S31</td></tr> </table> <p>1924</p> </div>	T6S	R22E	S30	S31
T6S					
R22E					
S30					
S31					
	from which, A catclaw, 6 ins. in diam., brs. S. 51° E., 100 lks. dist., marked $\frac{1}{4}$ S 31 BT. A mesquite, 5 ins. in diam., brs. S. 20° E., 99 lks. dist., marked $\frac{1}{4}$ S 31 BT.				
37.30	Descend 30 ft., over N. slope. Wash, 15 lks. wide, course E.; thence over gently rolling land.				
56.70	Wire fence, brs. NE. and SW.				
59.30	Bottom of gulch, 40 lks. wide, 40 ft. deep, course N. 70° E.				
73.34	Intersect Sectional Correction Line surveyed due West, thru. T. 6 S., R. 22 E., as hereinafter described. At this point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 15 ins. in the ground, to bed rock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone around post, for cor. of secs. 30 and 31 only, marked on brass cap, <div style="text-align: center;"> <table border="1"> <tr><td>T6S</td></tr> <tr><td>R22E</td></tr> <tr><td>S30</td></tr> <tr><td>S31</td></tr> </table> <p>1924</p> </div>	T6S	R22E	S30	S31
T6S					
R22E					
S30					
S31					
	No bearing trees available. Land, mountainous and rolling. Soil, rocky and gravelly, 3rd rate. Timber, cottonwood, mesquite and catclaw. Undergrowth, oak and yucca.				

	North, on true line, on W. bdy. of sec. 30. Over heavily rolling land, thru. scattering timber and undergrowth.				
16.70	Ascend 131 ft.; over SE. and E. slopes, to Wash, 40 lks. wide, course S. 70° E. Enter mountainous land.				
40.00	Ascend 386 ft., over SE. slope, to Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 30 only, marked on brass cap, <div style="text-align: center;"> <table border="1"> <tr><td>T6S</td></tr> <tr><td>R22E</td></tr> <tr><td>S30</td></tr> </table> <p>1924</p> </div>	T6S	R22E	S30	
T6S					
R22E					
S30					
	No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.				

14 Survey of West bdy. of Township 6 South, Range 22 East.

Chains.

72.00 Ascend 550 ft., over SE.slope.
 Spur, slopes S.70°E.
 78.50 Descend 250 ft., over NE.slope,
 Gulch, course SE.
 80.00 Ascend 30 ft., over S.slope, to
 Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the
 ground, to bed rock, deposit a stone marked with a
 cross (x) at base of post, and raise a mound of stone
 around post, for cor. of secs. 19 and 30, only, marked
 on brass cap,

T6S
R22E
S19
S30

1924

No bearing trees available.
 Land, heavily rolling and mountainous.
 Soil, rocky, 4th rate.
 Timber, juniper and pinyon.
 Undergrowth, scrub oak, manzanita and yucca.

 North, on true line, on W. bdy. of sec. 19.
 Over mountainous land, thru. scattering timber and under-
 growth.

11.00 Ascend 270 ft., over S. slope.
 Spur, slopes E.
 40.00 Descend 690 ft., over NE. slope, to
 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in
 the ground, for $\frac{1}{4}$ sec. cor. of sec. 19 only, marked on
 brass cap,

±S19

1924

No bearing trees available.
 Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.
 56.00 Descend 160 ft., over N. slope.
 Bottom of gulch, course E.
 62.00 Ascend 90 ft., over S. slope.
 Spur, slopes E.
 80.00 Descend 115 ft., over NE. slope.
 Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in the
 ground to bed rock, deposit a stone, marked with a
 cross (x) at base of post, and raise a mound of stone
 around post, for cor. of secs. 18 and 19 only, marked on
 brass cap,

T6S
R22E
S18
S19

1924

from which,

A mesquite, 10 ins. in diam., brs. S.10°E., 113
 lks. dist., marked T6S R22E S19 BT.

No other bearing tree available.
 Land, mountainous and rolling.
 Soil, rocky, 4th rate.
 Timber, pinyon, juniper and mesquite.
 Undergrowth, scrub oak, manzanita and yucca.

 North, on W. bdy. of sec. 18.
 Over mountainous land, thru. scattering timber and under-
 growth.

Survey of West boundary of Township 6 South Range 22 East. 15

Chains. Descend 80 ft., over NE.slope.
 5.00 Bottom of gulch, 50 lks.wide, course SE. (Water in pools)
 Ascend 330 ft., over SW.slope.
 22.50 Spur, slopes SE.
 Descend 90 ft., over NE.slope.
 30.00 Bottom of gulch, course SE.
 Ascend 250 ft., over SW.slope, to
 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 12 ins. in
 the ground, to bed rock, deposit a stone marked cross
 (x) at base of post, and raise a mound of stone around
 post, for $\frac{1}{4}$ sec.cor. of sec.18 only, marked on brass
 cap,

| $\frac{1}{4}$ S18
 1924

from which,
 A scrub oak, 4 ins.in diam., brs.S.73°E., 50 lks.
 dist., marked $\frac{1}{4}$ S 18 BT.

No other bearing tree available.
 Ascend 60 ft., over SW.slope.
 43.00 Spur, slopes SE.
 Descend 50 ft., over NE.slope.
 47.00 Bottom of gulch, course SE.
 Ascend 450 ft., over SW.slope.
 57.00 Divide, brs.NE. and SW.
 Descend 200 ft., over NW.slope.
 75.00 Bottom of gulch, course W.
 Ascend 110 ft., over SW.slope, to
 80.00 Set an iron post, 3 ft.long, 2 ins.in diam., 18 ins.in the
 ground to bed rock, deposit a stone marked with a cross
 (x) at base of post, and raise a mound of stone around
 post, for cor.of secs.7 and 18 only, marked on brass
 cap,

| T6S
 R22E
 S 7
 | S18

1924

No bearing trees available.
 Land, mountainous.
 Soil, rocky and gravelly, 3rd and 4th rate.
 Timber, oak.
 Undergrowth, scrub oak and yucca.

 North, on true line, on W. bdy.of sec.7.
 Over mountainous land, thru. scattering timber and under-
 growth.
 Ascend 50 ft., over SW.slope.
 3.20 Spur, slopes NW.
 Descend 740 ft., over N.slope.
 29.40 Bottom of gulch, course NW.
 Ascend 50 ft., over SW.slope, to
 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 27 ins.in the
 ground, for $\frac{1}{4}$ sec.cor.of sec.7 only, marked on brass
 cap,

| $\frac{1}{4}$ S 7
 1924

from which,
 A juniper, 8 ins.in diam., brs.N.26°E., 245 lks.
 dist., marked $\frac{1}{4}$ S 7 BT.
 A pinyon, 12 ins.in diam., brs.S.62°E., 112 lks.
 dist., marked $\frac{1}{4}$ S 7 BT.

16 Survey of West boundary of Township 6 South, Range 22 East.
Chains.

- 40.30 Spur, slopes W.
Descend 540 ft., over NW. slope.
- 70.00 Bottom of gulch, 20 lks. wide, course NW.
Ascend 60 ft., over SW. slope.
- 77.90 Spur, slopes NW.
Descend 23 ft., over NE. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in the ground to bed rock, deposit stone marked with a cross (x) at base of post, and raise a mound of stone around post, for cor. of secs. 6 and 7 only, marked on brass cap,

T6S
R22E
S 6
S 7

1924

from which,

A juniper, 24 ins. in diam., brs. S. 87° E., 400 lks. dist., marked T6S R22E S7 BT.

No other bearing tree available.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, juniper and pinyon.

Undergrowth, scrub oak, manzanita and yucca.

North, on true line, on W. bdy. of sec. 6.

Over mountainous land, thru. scattering timber and undergrowth.

- 31.00 Descend 290 ft., over NE. slope.
Bottom of gulch, course N. 20° W.
- 40.00 Ascend 40 ft., over SW. slope, to
Set an iron post, 3 ft. long, 1 in. in diam., 15 ins. in the ground, to bed rock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone around post, for $\frac{1}{2}$ sec. cor. of sec. 6 only, marked on brass cap,

S 6

1924

No bearing trees available.

Ascend 40 ft., over SW. slope.

- 46.00 Spur, slopes W.

Descend 250 ft., over NW. slope.

- 66.00 Bottom of gulch, 20 lks. wide, course N. 20° E.

Ascend 60 ft., over SE. slope, to

- 70.50 Descend along E. slope, to

- 75.80 Intersect the 1st Standard Parallel S., at a point 2.50 chs. E. of the standard $\frac{1}{2}$ sec. cor. of sec. 36, T. 5 S., R. 21 E., hereinafter described.

At intersection, set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bed rock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone around post, for closing cor. of Ts. 6 S., Rs. 21 and 22 E., marked on brass cap,

T5S	R21E
S 36	
S 1	S 6
R21E	R22E
T6S	
C C	

1924

No bearing trees available.

Land, mountainous and rolling.

Soil, rocky and sandy, 4th rate.

Timber, juniper and mesquite.

Undergrowth, scrub oak, cactus and sotol.

Chains.

The original standard cor. of T. 5 S., Rs. 21 and 22 E., established by P. Centzen, U.S.D.S., in 1900, is a sandstone, 16x12x12 ins. above ground, marked SC on N. face, and 6 notches on each of E., W., and N. faces, firmly set and witnessed by a mound of stone, 2 ft. base, 1½ ft. high, N. of cor. No bearing trees.

Thence,
 West, on true line, on S. bdy. of sec. 36 (E. ½).
 Over heavily rolling land, thru scattering undergrowth.
 Descend 20 ft., over W. slope.
 8.00 Bottom of gulch, course N. 20° E.
 Ascend 80 ft., over E. slope.
 14.00 Spur, slopes N. 20° E.
 Descend 130 ft., over W. slope.
 33.50 Bottom of gulch, 20 lks. wide, course N. 20° E.
 Ascend 100 ft., over E. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground, to bed rock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone around post, for standard ¼ sec. cor. of sec. 36, marked on brass cap,

S C
 ¼ S 36
 1924

No bearing trees available.
 Land, heavily rolling.
 Soil, gravelly and rocky, 4th rate.
 Timber, none.
 Undergrowth, scrub oak, cactus, and sotol.

Boundaries of Township 6 South, Range 22 East.
 Latitudes, departures and closing errors.

Line designated.	True bearing.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
South boundary,	N. 89° 39' W.	40.05	.24			40.05
	N. 89° 48' W.	40.14	.14			40.14
	N. 89° 8' W.	120.45	1.82			120.44
	N. 89° 16' W.	40.00	.51			40.00
	N. 89° 10' W.	40.07	.58			40.07
	N. 89° 6' W.	40.18	.63			40.18
	N. 89° 7' W.	40.12	.62			40.12
	N. 89° 6' W.	40.04	.63			40.04
	N. 88° 53' W.	91.90	1.79			91.88
West boundary,	North,	469.14	469.14			
North boundary, (1st. Std. Par. S.)	East,	491.65			491.65	
East boundary,	S. 0° 4' E.	75.82		75.82	.09	
	S. 0° 3' W.	80.28		80.28		.07
	S. 0° 6' E.	40.16		40.16	.07	
	S. 0° 3' E.	40.18		40.18	.03	
	S. 0° 4' E.	40.08		40.08	.05	
	S. 0° 9' E.	40.05		40.05	.10	
	South,	40.04		40.04		
S. 0° 5' E.	120.64		120.64	.17		
Convergency,					.47	
Totals.			476.10	477.25	492.63	492.99
				476.10		492.63
Error in latitude.			1.15			
Error in departure.					0.36	

Survey of the Subdivisions of T6S,R22E.

BOOK 3706


Chains

Preliminary to the subdivision of this township, survey a sectional correction line, from the cor. of secs. 25, 30,31, and 36 on the East bdy. of the Tp., West 492.92 chs. to the intersection with the West bdy. of the Tp., setting temp. 1/4 sec. and sec. cors. alternately at intervals of 40.00 chs. thereon.

The positions of the permanent sec. cors. on said sectional correction line are then determined by the points of intersection therewith of the meridional section lines, which gives the true latitudinal intervals whereby the permanent 1/4 sec. cors. are established at mid-points between sec. cors.

From the reestablished cor. of secs. 1,2,35, and 36 on the S. bdy. of the Tp., hereinbefore described N.0°03'W., bet. secs. 35 and 36.


- 4.08 Wash, 60 lks. wide, 1 ft. deep, course NE.
- 8.00 Highway, brs NE. to Safford and SW. to Wilcox.
- 9.78 Wash, 40 lks. wide, 1 ft. deep, course NE.
- 39.88 Wash, 20 lks. wide, 2 ft. deep, course NE.
- 40.08 (40.00 chs. S.0°03'E. from intersection with sectional correction line)
Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for 1/4 sec. cor., marked on brass cap



from which

- A mesquite, 4 ins. dia., brs N.24°E., 23 lks. dist., marked 1/4 S36 BT.
- A mesquite, 6 ins. dia., brs S.33°W., 35 lks. dist., marked 1/4 S35 BT.
- 46.88 Wash, 10 lks. wide, 2 ft. deep, course N.70°E.
- 60.88 Wash, 20 lks. wide, 2 ft. deep, course NE.
- 67.58 Wash, 40 lks. wide, 1 ft. deep, course NE.
- 78.3 8 Wash, 20 lks. wide, course NE.

80.08 Intersect the sectional correction line at 24 lks. W. of the temp. cor. of secs. 25,26,35, and 36. At point of intersection, Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the ground for cor. of secs. 25,26,35, and 36, marked on brass cap



from which

- A mesquite, 10 ins. dia., brs N.49°E., 27 lks. dist., marked T6S R22E S25 BT.
- A mesquite, 8 ins. dia., brs S.69°E., 210 lks. dist., marked T6S R22E S36 BT.
- A mesquite, 10 ins. dia., brs S.75°W., 107 lks. dist., marked T6S R22E S35 BT.
- A mesquite, 10 ins. dia., brs N.71 1/2°W., 63 lks. dist., marked T6S R22E S26 BT.

Land, level.
Soil, sandy loam, 1st and 2nd rate.
Timber, scattering mesquite.
Undergrowth, greasewood, yucca, and cat claw.

Chains

From the cor. of secs. 25,30,31, and 36 on the East bdy. of the Tp., hereinbefore described.

West on true sectional correction line bet. secs. 25 and 36.

Over level land, through scattering timber and undergrowth

31.40 Wire fence, brs N. and S.

32.70 Old road, brs NE. and SW.

40.12 (Mid-point) set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4 S25

S36

1924

from which

A mesquite, 12 ins. dia., brs N.25°E., 51 lks. dist., marked 1/4 S25 BT.

A mesquite, 4 ins. dia., brs S.5 1/4°E., 50 lks. dist., marked 1/4 S36 BT.

62.00 Wash, 25 lks. wide, 1 ft. deep, course NE.

70.00 Wash, 20 lks. wide, 1 ft. deep, course NE.

80.24 Intersect the cor. of secs. 25,26,35, and 36.

Land, level.

Sandy loam. 2nd rate.

Timber, scattering mesquite.

Undergrowth, greasewood, yucca and catclaw.

N.0°03'W., bet. secs. 25 and 26

Over level land, through scattering timber and undergrowth

.20 Wash, 10 lks. wide, 1 ft. deep, course NE.

8.00 Wash, 40 lks. wide, course N.70°E.

12.60 Wash, 30 lks. wide, 2 ft. deep, course E.

36.50 Wash, 20 lks. wide, 2 ft. deep, course E.

40.00 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for 1/4 sec. cor., marked on brass cap

S26 | S25

1924

from which

A mesquite, 6 ins. dia., brs S.86°E., 178 lks. dist., marked 1/4 S25 BT.

A mesquite, 5 ins. dia., brs S.13°W., 74 lks. dist., marked 1/4 S26 BT.

46.00 Wash, 15 lks. wide, 1 ft. deep, course E.

59.00 Wash, 100 lks. wide, course N.70°E.

80.00 Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the ground, for cor. of secs. 23,24,25, and 26, marked on brass cap

T6S R22E

S23 | S24

S26 | S25

1924

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor. No bearing trees available.

Land, level. (Drains NE)

Soil, sandy loam, 2nd rate.

Timber, scattering mesquite.

Undergrowth, greasewood, yucca and catclaw.

Survey of the Subdivisions of T6S,R22E.

BOOK 3706

Chains.

40.00 East on a random line bet. secs. 24 and 25.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.16 Intersect the E. bdy. of the Tp., 12 lks. South of.,
 the cor. of secs. 19,24,25, and 30, hereinbefore des-
 cribed.
 Thence
 S.89°55'W., on true line bet. secs. 24 and 25.
 Over level land, draining to NE., through scattering
 timber and undergrowth.
 7.16 Road, brs N. and S.
 36.66 Wash, 15 lks. wide, 1 ft. deep, course NE.
 40.08 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in
 the ground, on bed rock, for $\frac{1}{4}$ sec. cor., marked on brass
 cap

$\frac{1}{4}$ S24
 S25
 1924

from which

A mesquite, 10 ins. dia., brs N.55°E., 54 lks. dist.,
 marked $\frac{1}{4}$ S24 BT.
 A mesquite, 8 ins. dia., brs S.13°E., 200 lks. dist.,
 marked $\frac{1}{4}$ S25 BT.

43.16 Wash, 15 lks. wide, 1 ft. deep, course NE.
 57.66 Wash, 50 lks. wide, course NE.
 74.86 Wash, 15 lks. wide, 1 ft. deep, course NE.
 80.16 The cor. of secs. 23,24,25, and 26.

Land, level.
 Soil, sandy, 2nd rate.
 Timber, scattering mesquite.
 Undergrowth, greasewood, mesquite, catclaw, and yucca.

N.0°03'W., bet. secs. 23 and 24.
 Over level land on slight NE. slope, through scattering
 timber and undergrowth.

4.70 Wash, 15 lks. wide, 1 ft. deep, course NE.
 11.50 Wash, 30 lks. wide, 1 ft. deep, course NE.
 13.00 Dim road, brs E. and W.
 15.50 Wash, 50 lks. wide, 1 ft. deep, course NE.
 27.20 Wash, 40 lks. wide, 1 ft. deep, course NE.
 40.00 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 S23 | S24
 1924

from which

A mesquite, 10 ins. dia., brs N.58 $\frac{1}{2}$ °E., 66 lks. dist.,
 marked $\frac{1}{4}$ S24 BT.
 A mesquite, 8 ins. dia., brs N.71 $\frac{1}{2}$ °W., 96 lks. dist.,
 marked $\frac{1}{4}$ S23 BT.

48.50 Wash, 15 lks. wide, 2 ft. deep, course NE.
 64.50 Wash, 15 lks. wide, 2 ft. deep, course NE.
 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the
 ground, for cor. of secs. 13,14,23, and 24, marked on
 brass cap

T6S R22E
 S14 | S13
 S23 | S24

1924

from which

A mesquite, 6 ins. dia., brs N.23 $\frac{1}{2}$ °E., 83 lks. dist.,

Survey of the Subdivisions of T6S,R22E.

Chains.

marked T6S R22E S13 BT.
 A mesquite, 8 ins. dia., brs S.71°E., 244 lks. dist.,
 marked T6S R22E S24 BT.
 A mesquite, 8 ins. dia., brs S.42½°W., 108 lks. dist.,
 marked T6S R22E S23 BT.
 A mesquite, 4 ins. dia., brs N.89½°W., 108 lks. dist.,
 marked T6S R22E S14 BT.

Land, level.
 Soil, sandy loam, 2nd rate.
 Timber, scattering mesquite.
 Undergrowth, greasewood, mesquite, and catclaw.

40.00 N.89°55'E., on random line bet. secs. 13 and 24.
 Set temp. ¼ sec. cor.
 80.10 Intersect the E. bdy. of the Tp., 5 lks. N. of the cor.
 of secs. 13,18,19, and 24, hereinbefore described.
 Thence
 S.89°57'W., on true line bet. secs. 13 and 24.
 Over level land, draining to NE., through scattering
 timber and undergrowth.
 4.10 Shallow wash, 40 lks. wide, course NE.
 27.10 Shallow wash, 40 lks. wide, course NE.
 37.90 Wash, 15 lks. wide, 1 ft. deep, course NE.
 40.05 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the
 ground, for ¼ sec. cor., marked on brass cap

¼ S13
 S24
 1924

from which
 A mesquite, 6 ins. dia., brs S.13°E., 58 lks. dist.,
 marked ¼ S24 BT.
 A mesquite, 6 ins. dia., brs N.30½°W., 120 lks. dist.,
 marked ¼ S13 BT.
 80.10 The cor. of secs. 13,14,23, and 24.
 Land, level. (Drains to NE.)
 Soil, sandy loam, 2nd rate.
 Timber, mesquite.
 Undergrowth, greasewood, yucca and catclaw.

N.0°03'W., bet. secs. 13 and 14.
 Over level land, draining to NE., through scattering
 timber and undergrowth.
 8.50 Wash, 100 lks. wide, 6 ins. deep, course NE.
 18.40 Wash, 30 lks. wide, 2 ft. deep, course NE.
 35.00 Wash, 20 lks. wide, 2 ft. deep, course E.
 38.80 Road, brs N70°E. and S.70°W.
 40.00 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in
 the ground, for ¼ sec. cor., marked on brass cap

¼
 S14 | S13
 1924

from which
 A mesquite, 8 ins. dia., brs N.75½°E., 132 lks. dist.,
 marked ¼ S13 BT.
 A mesquite, 8 ins. dia., brs S.30½°W., 110 lks. dist.,
 marked ¼ S14 BT.
 41.00 Wash, 30 lks. wide, 1 ft. deep, course E.
 49.00 Wash, 30 lks. wide, 1 ft. deep, course NE.
 79.00 Wash, 20 lks. wide, 1 ft. deep, course NE.

80.00

et

Survey of the Subdivisions of T6S, R22E.

BOOK 3706

Chains.

80.00 Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the ground, for cor. of secs. 11, 12, 13, and 14, marked on brass cap

T6S R22E
S11 | S12
S14 | S13

1924

from which

- A mesquite, 8 ins. dia., brs N.37½°E., 181 lks. dist., marked T6S R22E S12 BT.
- A mesquite, 8 ins. dia., brs S.25°E., 147 lks. dist., marked T6S R22E S13 BT.
- A mesquite, 6 ins. dia., brs S.21°W., 91 lks. dist., marked T6S R22E S14 BT.
- A mesquite, 4 ins. dia., brs N.66½°W., 103 lks. dist., marked T6S R22E S11 BT.

Land, level.

Soil, sandy loam, 2nd rate.

Timber, scattering mesquite.

Undergrowth, greasewood, yucca, and cat claw.

40.00 N.89°57'E., on random line bet. secs. 12 and 13.
Set temp. ¼ sec. cor.

80.08 Intersect the E. bdy. of the Tp., 28 lks. S. of the cor. of secs. 7, 12, 13, and 18, hereinbefore described

Thence

S.89°45'W., on true line bet. secs. 12 and 13.

Over level land, through scattering timber and undergrowth.

40.04 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for ¼ sec. cor., marked on brass cap

¼ S12
S13

1924

from which

- A mesquite, 8 ins. dia., brs N.53½°W., 17 lks. dist., marked ¼ S12 BT.
- A mesquite, 4 ins. dia., brs S.5½°E., 63 lks. dist., marked ¼ S13 BT.

41.58 Dim road, brs N.20°E. and S.20°W.

52.58 Wash, 20 lks. wide, 1 ft. deep, course NE.

78.18 Wash, 30 lks. wide, 1 ft. deep, course NE.

80.08 The cor. of secs. 11, 12, 13, and 14.

Land, level.

Soil, sandy loam, 2nd rate.

Timber, scattering mesquite.

Undergrowth, greasewood, cacti, and catclaw.

4.50 N.0°03'W., bet. secs. 11 and 12.
Over level land, through scattering timber and undergrowth.

32.80 Wash, 40 lks. wide, 2 ft. deep, course NE.

40.00 Wash, 30 lks. wide, 3 ft. deep, course NE.

40.00 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground for ¼ sec. cor., marked on brass cap.

Chains

$\frac{1}{4}$
S11 | S12

1924

- No bearing trees available.
- Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.
- 48.30 Wash, 10 lks. wide, course E.; asc. 50 ft. over SE. slope.
- 70.60 Shallow wash, 50 lks. wide, course NE.
- 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the ground, for cor. of secs. 1,2,11, and 12, marked on brass cap

T6S R22E
S 2 | S 1
S11 | S12

1924

- from which
- A mesquite, 10 ins. dia., brs N.27 $\frac{1}{2}$ °E., 425 lks. dist., marked T6S R22E S1 BT.
- A mesquite, 10 ins. dia., brs S.79 $\frac{1}{2}$ °W., 220 lks. dist., marked T6S R22E S11 BT
- A mesquite, 8 ins. dia., brs N.25°W., 194 lks. dist., marked T6S R22E S 2 BT.
- No other tree available.
- Land, slightly rolling.
- Soil, sandy and gravelly, 2nd rate.
- Timber, mesquite.
- Undergrowth, greasewood, yucca and catclaw.

- N.89°45'E., on random line bet. secs. 1 and 12.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.30 Intersect the E. bdy. of the Tp., 12 lks. South of the cor. of secs. 1,6,7, and 12, hereinbefore described. Thence
- S.89°40'W., on true line bet. secs. 1 and 12.
- Over very gentle NE. slope, through scattering timber and undergrowth.
- 18.80 Dim road brs NE. and SW.
- 26.30 Wash, 25 lks. wide, 2 ft. deep, course NE.
- 34.00 Wash, 80 lks. wide, 2 ft. deep, course NE.
- 40.15 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 1
S12
1924


- from which
- A mesquite, 8 ins. dia., brs N.30°E., 75 lks. dist., marked $\frac{1}{4}$ S1 BT.
- A mesquite, 8 ins. dia., brs S.65 $\frac{1}{2}$ °E., 77 lks. dist., marked $\frac{1}{4}$ S12 BT.
- 72.30 Wash, .50 lks. wide, 1 ft. deep, course NE.
- 80.30 The cor. of secs. 1,2,11, and 12.

- Land, level.
- Soil, sandy loam, 2nd rate.
- Timber, mesquite.
- Undergrowth, greasewood, catclaw, cacti, and yucca.

Survey of the Subdivisions of T6S,R22E

Chains.


N.0°03'W., bet. secs. 1 and 2.
 Over gently rolling land, through scattering timber and undergrowth.
 3.20 Wash, 15 lks. wide, course NE.
 28.40 Wash, 20 lks. wide, course E.
 33.10 Wash, 20 lks. wide, 1 ft. deep, course NE.
 40.00 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



1924

from which
 A mesquite, 4 ins. dia., brs S.14 $\frac{1}{2}$ °W., 104 lks. dist., marked $\frac{1}{4}$ S2 BT.
 A mesquite, 6 ins. dia., brs S.71 $\frac{1}{2}$ °E., 86 lks. dist., marked $\frac{1}{4}$ S1 BT.

57.00 Wash, 40 lks. wide, 1 ft. deep, course NE.
 76.32 Intersect the First Standard Parallel South, at a point 14.16 chs. E. of the standard $\frac{1}{4}$ sec. cor. of sec. 35, which is a sandstone 12x10x10 ins. above ground, firmly set, marked S1 C on N face, and witnessed by one mesquite bearing tree N.74 $\frac{1}{2}$ °E., 145 lks. dist. and two sprts, one each E. and W. of cor., 3 ft. dist. (Set in the ground only).
 At point of intersection, set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the ground, for closing cor. of secs. 1 and 2, marked on brass cap




1924

No bearing trees available.
 Raise mound of stone, 3 ft. base, 2 ft. high, S. of cor.
 Land, very gently rolling.
 Soil, sandy loam, 2nd rate.
 Timber, mesquite.
 Undergrowth, greasewood, catclaw, and yucca.

From the reestablished cor. of secs. 2, 3, 34, and 35, on the S. bdy. of the Tp., hereinbefore described. N.0°03'W., on true line bet. secs. 34 and 35. Over slightly rolling land, through scattering timber and undergrowth.

25.00 Shallow wash, 100 lks. wide, course NE.
 32.20 Wash, 15 lks. wide, 1 ft. deep, course NE.
 38.87 (40.00 chs. S.0°03'E., from the inter section with sectional correction line)
 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



1924

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor
 No bearing trees available.
 46.60 Wash, 100 lks. wide, 18 ins. deep, course E.
 61.50 Wash, 15 lks. wide, 1 ft. deep, course E.
 78.70 Wash, 20 lks. wide, 1 ft. deep, course NE.
 78.87 Intersect the sectional correction line at 44 lks. W. of the temp. cor. of secs. 26, 27, 34, and 35. At point of intersection.

Chains.

Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the ground, for cor. of secs. 26,27,34, and 35, marked on brass cap

T6S R22E
S27 | S26
S34 | S35

1924

from which

- A mesquite, 8 ins. dia., brs N.76°E., 190 lks. dist., marked T6S R22E S26 BT.
- A mesquite, 12 ins. dia., brs S.26°E., 220 lks. dist., marked T6S R22E S35 BT.
- A mesquite, 10 ins. dia., brs S.50½°W., 310 lks. dist., marked T6S R22E S34 BT.
- A mesquite, 4 ins. dia., brs N.81°W., 30 lks. dist., marked BT. only.

Land, rolling and level.
Soil, sandy loam, 2nd rate.
Timber, mesquite.
Undergrowth, greasewood and catclaw.

From the cor. of secs. 25,26,35, and 36.
West on sectional correction line bet. secs. 26 and 35.
Over level land, through scattering timber and undergrowth

9.20
39.10
40.10

- Wash, 30 lks. wide, course NE.
- Wash, 20 lks. wide, 2 ft. deep, course NE.
- (Mid-point) set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for ¼ sec. cor., marked on brass cap

¼ S26
S35
1924

from which

- A mesquite, 6 ins. dia., brs N.26°W., 49 lks. dist., marked ¼ S26 BT.
- A mesquite, 6 ins. dia., brs S.18°E., 99 lks. dist., marked ¼ S35 BT.
- 78.90 Wash, 20 lks. wide, 1 ft. deep, course N.70°E.
- 80.20 Intersect the cor. of secs. 26,27,34, and 35.

Land, gently rolling.
Soil, sandy loam, 2nd rate.
Timber, mesquite.
Undergrowth, greasewood, cat claw, and yucca.

N.0°03'W., bet. secs. 26 and 27.
Over level land, through scattering timber and undergrowth

30.00
38.00
40.00

- Wash, 15 lks. wide, 1 ft. deep, course NE.
- Wash, 8 lks. wide, 1 ft. deep, course NE.
- Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground for ¼ sec. cor., marked on brass cap

¼
S27 | S26

1924

from which

- A mesquite, 4 ins. dia., brs S.57°E., 15 lks. dist., marked ¼ S26 BT.

Survey of the Subdivisions of T6S,R22E.

Chains.

- A mesquite, 4 ins. dia., brs N.15°W., 92 lks. dist., marked $\frac{1}{4}$ S27 BT.
- 53.00 Wash, 40 lks. wide, 1 ft. deep, course NE.
- 60.00 Wash, 60 lks. wide, 1 ft. deep, course NE.
- 70.00 Wash, 40 lks. wide, course NE.
- 77.50 Dim road, brs NE. and SW.
- 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the ground, for cor. of secs. 22,23,26, and 27, marked on brass cap

T6S R22E
 S22 | S23
 S27 | S26

1924

from which

- A mesquite, 8 ins. dia., brs N.89°E., 207 lks. dist., marked T6S R22E S23 BT.
- A mesquite, 8 ins. dia., brs S.20 $\frac{1}{2}$ °W., 68 lks. dist., marked T6S R22E S27 BT.
- A mesquite, 8 ins. dia., brs N.55°W., 194 lks. dist., marked T6S R22E S22 BT.

No other tree available.

Land, level and slightly rolling.
 Soil, sandy 2nd and 3rd rate.
 Timber, mesquite.
 Undergrowth, greasewood, yucca and catclaw.

- 40.00 East on a random line bet. secs. 23 and 26.
- Set temp. $\frac{1}{4}$ sec. cor.
- 80.28 Intersect the N. and S. line, 2 lks. S. of the cor. of secs. 23,24,25, and 26.

Thence
 S.89°59'W., on true line bet. secs. 23 and 26.
 Over level land, through scattering timber and undergrowth

- 30.28 Wash, 40 lks. wide, 1 ft. deep, course NE.
- 40.14 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap.

$\frac{1}{4}$ S23
 S26
 1924

from which

- A mesquite, 8 ins. dia., brs S.10°W., 3 lks. dist., marked $\frac{1}{4}$ S26 BT.
- A mesquite, 8 ins. dia., brs N.28°W., 263 lks. dist., marked $\frac{1}{4}$ S23 BT.

- 57.28 Wash, 40 lks. wide, 1 ft. deep, course NE.
- 63.28 Main wash, 60 lks. wide, 2 ft. deep, course NE.
- 76.28 Road, brs NE. and SW.
- 80.28 The cor. of secs. 22,23,26, and 27.

Land, level.
 Soil, sandy and gravelly, 2nd rate.
 Timber, mesquite.
 Undergrowth, greasewood, yucca, and catclaw.

- N.0°03'W., bet. secs. 22 and 23.
- Over level land; through scattering timber and undergrowth
- 5.50 Wash, 14 lks. wide, 1 ft. deep, course NE.
- 32.50 Wash, 20 lks. wide, 1 ft. deep, course NE.
- 37.70 Wash, 15 lks. wide, 1 ft. deep, course NE.
- 40.00 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

Chains.

1/4

S22 | S23

1924

from which

A mesquite, 8 ins. dia., brs S.47 1/2°E., 162 lks. dist., marked 1/4 S23 BT.

No other tree available.

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

64.00 Shallow wash, 100 lks. wide, course NE.

74.50 Wash, 30 lks. wide, 1 ft. deep, course NE.

80.00 Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the ground, for cor. of secs. 14,15,22, and 23, marked on brass cap

T6S R22E

S15 | S14

S22 | S23

1924

from which

A mesquite, 5 ins. dia., brs S.74°E., 166 lks. dist., marked T6S R22E S23 BT.

A mesquite, 6 ins. dia., brs S.34 1/2°W., 72 lks. dist., marked T6S R22E S22 BT.

A mesquite, 6 ins. dia., brs N.67 1/2°W., 393 lks. dist., marked T6S R22E S15 BT.

No other tree available.

Land, level.

Soil, sandy loam, 2nd rate.

Timber, scattering mesquite.

Undergrowth, greasewood, yucca and catclaw.

N.89°59'E., on random line bet. secs. 14 and 23.

40.00 Set temp. 1/4 sec. cor.

80.28 Intersect the N. and S. line, 9 lks. S. of the cor. of secs. 13,14,23, and 24.

Thence

S.89°55'W., on true line bet. secs. 14 and 23.

Over level land, through scattering timber and undergrowth

20.00 Wash, 30 lks. wide, 1 ft. deep, course NE.

40.14 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4 S14

S23

1924

from which

A mesquite, 4 ins. dia., brs N.14 1/2°W., 96 lks. dist., marked 1/4 S14 BT.

A mesquite, 6 ins. dia., brs S.1°E., 147 lks. dist., marked 1/4 S23 BT.

56.48 Wash, 40 lks. wide, 6 ins. deep, course NE.

78.48 Wash, 30 lks. wide, 1 ft. deep, course NE.

80.28 The cor. of secs. 14,15,22, and 23.

Land, level and slightly rolling.

Soil, sandy, 2nd rate.


Timber, mesquite.

Undergrowth, greasewood, catclaw, and yucca.


Survey of the Subdivisions of T6S, R22E.

Chains.

N.0°03'W., bet. secs. 14 and 15.
 Over slightly rolling land, through undergrowth.
 14.70 Road, brs NE. and SW.
 22.00 Wash, 120 lks. wide, 18 ins. deep, course NE.
 36.80 Wash, 15 lks. wide, 1 ft. deep, course E.
 40.00 Set an iron post, 3 ft. long, 1 in. dia., 16 ins. in the ground, on bed rock, deposit stone marked with a cross (X) at base of post and raise a mound of stone around post for $\frac{1}{4}$ sec. cor., marked on brass cap




No bearing trees are available.
 56.50 Wash, 15 lks. wide, 1 ft. deep, course NE.
 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the ground, for cor. of secs. 10, 11, 14, and 15, marked on brass cap



No bearing trees available
 Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.
 Land, rolling.
 Soil, sandy loam, 2nd and 3rd rate.
 Timber, mesquite.
 Undergrowth, greasewood, palo verde, and catclaw.

N.89°55'E., on random line bet. secs. 11 and 14.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.22 Intersect the N. and S. line, 5 lks. S. of the cor. of secs. 11, 12, 13, and 14.
 Thence
 S.89°53'W., on true line bet. secs. 11 and 14.
 Over very gently rolling NE. slope, through scattering undergrowth.
 3.00 Wash, 100 lks. wide, 1 ft. deep, course NE.
 32.60 Wash, 35 lks. wide, course NE.
 40.11 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



No bearing trees available.
 Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.
 60.00 Wash, 20 lks. wide, course SE.
 80.22 The cor. of secs. 10, 11, 14, and 15.
 Land, gently rolling.
 Soil, sandy loam, 2nd rate.
 Timber, none.
 Undergrowth, greasewood, palo verde, yucca and catclaw.

N.0°03'W., bet. secs. 10 and 11.
 Over gently rolling NW. slope, through scattering undergrowth.

Chains.

21.00 Wash, 10 lks. wide, course NW.
 32.30 Gulch, 4 lks. wide, course W.
 40.00 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in
 the ground for $\frac{1}{4}$ sec. cor.; marked on brass cap

$\frac{1}{4}$
 S10 | S11

1924

No bearing trees available.
 Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.
 58.00 Wash, 10 lks. wide, course NW.
 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the
 ground, for cor. of secs. 2,3,10, and 11, marked on brass
 cap

T6S R22E
 S 3 | S 2
 S10 | S11

1924

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.
 No bearing trees available.

Land, gently rolling.
 Soil, sandy loam, 2nd rate.
 Timber, none.
 Undergrowth, greasewood, catclaw, palo verde and yucca.

40.00 N.89°53'E., on random line bet. secs. 2 and 11.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.22 Intersect the N. and S. line, 5 lks. S. of the cor. of
 secs. 1,2,11, and 12.

Thence
 S.89°51'W., on true line bet. secs. 2 and 11.
 Over gently rolling land, through scattering undergrowth.
 8.22 Wash, 26 lks. wide, course NW.; sec. 70 ft. over S. slope
 29.22 Wash, 15 lks. wide, course SE.
 40.11 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 2
 S11

1924


No bearing trees available
 Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.
 Thence over general NE. slope, ascending 60 ft.
 59.72 Low ridge, brs N. and S.; desc. NW. slope 60 ft.
 74.32 Wash, 20 lks. wide, course NW.
 80.22 The cor. of secs. 2,3,10, and 11.

Land, gently rolling.
 Soil, sandy, 2nd rate.
 Timber, none.
 Undergrowth, greasewood, catclaw, palo verde and yucca

N.0°03'W., on true line bet. secs. 2 and 3.
 Over gently rolling land, through scattering timber and
 undergrowth.
 8.60 Wash, 15 lks. wide, course NW.
 24.00 Wash, 20 lks. wide, course W.
 32.40 Wash, 20 lks. wide, 1 ft. deep course W.

Chains.

40.00 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap.




1924

No bearing trees available.

63.50 Wash, 20 lks. wide, 1 ft. deep, course NW.
76.50

Intersect the First Standard Parallel South, at a point 132.90 chs. S. of the standard line of sec. 34, which is a granite stone, 8x8x6 ins. above ground, firmly set and marked, $\frac{1}{4}$ S. of 34 sec. N. face, and witnessed by one (mesquite bearing tree, No 29) $\frac{1}{4}$ W. 182 lks. distant and a mound of stone N.E. of cor. retraced for alignment only)

At point of intersection, set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the ground, for closing cor. of secs. 2 and 3, marked on brass cap



1924

No bearing trees available.

Raise mound of stone, 3 ft. base, 2 ft. high, S. of cor. Land, rolling.

Soil, sandy and gravelly, 2nd and 3rd rate.

Timber, none.

Undergrowth, greasewood, yucca, palo verde and cat claw.

From the cor. of secs. 3, 4, 33, and 34, on the S. bdy. of the Tp., hereinbefore described.

N.0°04'W., bet. secs. 33 and 34.


Over gently rolling land, through scattering timber and undergrowth.

11.60 Wash, 40 lks. wide, 1 ft. deep, course NE.

15.00 Wash, 50 lks. wide, 1 ft. deep, course E.

37.75 (40.00 chs. S.0°04'E., from intersection with the sectional correction line)

Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



1924

from which

A mesquite, 8 ins. in dia., brs N.29 $\frac{1}{2}$ °W., 168 lks. dist., marked $\frac{1}{4}$ S33 BT.

A mesquite, 8 ins. dia., brs N.6 $\frac{1}{2}$ °E., 96 lks. dist., marked $\frac{1}{4}$ S34 BT.

42.50 Wash, 40 lks. wide, 2 ft. deep, course NE.

53.20 Wash, 15 lks. wide, 1 ft. deep, course NE.

58.30 Drain, 6 lks. wide, course NE.; asc. 70 ft. over S. slope

70.00 Spur, slopes N.70°E.; desc. 80 ft. over N. slope.

76.00 Drain, course NE.; thence over rolling NE. slope.

77.75 Intersect the sectional correction line at 72 lks. W. of the temp. cor. of secs. 27, 28, 33, and 34. At point of intersection,

32
Chains

Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the ground, for cor. of secs. 27, 28, 33, and 34, marked on brass cap

T6S	R22E
S28	S27
S33	S34

1924

No bearing trees available.
Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, gently rolling.
Soil, sandy loam, 2nd and 3rd rate.
Timber, mesquite,
Undergrowth, greasewood, catclaw, and yucca.

From the cor. of secs. 26, 27, 34, and 35, hereinbefore described.

West on sectional correction line bet. secs. 27 and 34. Over slightly rolling NE. slope, through scattering timber and undergrowth.

- 1.28 Wash, 20 lks. wide, 1 ft. deep, course NS. 70°E.
- 12.28 Same wash, 20 lks. wide, 1 ft. deep, course NE.
- 40.14 (Mid-point), set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap.

$\frac{1}{4}$ S27
S34

1924

from which

- A mesquite, 8 ins. dia., brs N. 37°W., 23 lks. dist., marked $\frac{1}{4}$ S27 BT.
- A mesquite, 8 ins. dia., brs S. 7°W., 129 lks. dist., marked $\frac{1}{4}$ S34 BT.

- 45.68 Wash, 150 lks. wide, 18 ins. deep, course NE.
- 57.28 Wash, 20 lks. wide, course NE.
- 68.68 Wash, 10 lks. wide, course S. 70°E.
- 77.28 Wash, 5 lks. wide, course NE.
- 80.28 Intersect the cor. of secs. 27, 28, 33, and 34.

Land, gently rolling.
Soil, sandy, 2nd and 3rd rate.
Timber, mesquite.
Undergrowth, greasewood, catclaw, and yucca.

N. 0°04' W., bet. secs. 27 and 28. Over gently rolling NE. slope, through scattering timber and undergrowth.

- 15.00 Wash, 40 lks. wide, course NE.
- 40.00 True point for $\frac{1}{4}$ sec. cor. falls in wash, 40 lks. wide, 2 ft. deep, course NE., unsuitable for permanent cor.
- 41.00 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for with cor. to $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S28 S27
W C

1924


from which

- A mesquite, 6 ins. dia., brs East, 111 lks. dist., marked $\frac{1}{4}$ S27 WC BT.
- A mesquite, 6 ins. dia., brs S. 28°W., 192 lks. dist., marked $\frac{1}{4}$ S28 WC BT.

Survey of the Subdivision of T6S,R22E.

Chains.

44.50 Dim road, brs NE. and SW.
 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the ground, for cor. of secs. 21,22,27, and 28, marked on brass cap



1924


No bearing trees available.
 Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling.
 Soil, sandy and gravelly, 2nd and 3rd rate.
 Timber, mesquite.
 Undergrowth, greasewood, palo verde, catclaw, and yucca.

40.00 East on random line bet. secs. 22 and 27.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.30 Intersect the N. and S. line, 14 lks. N. of the cor. of secs. 22,23,26, and 27.

Thence
 N.89°54'W., on true line bet. secs. 22 and 27.
 Over gently rolling and level land, through scattering undergrowth.

40.15 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



1924

No bearing trees available.
 Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.


41.30 Wash, 15 lks. wide, course NE.
 53.80 Wash, 30 lks. wide, course NE.
 80.30 The cor. of secs. 21,22,27, and 28.

Land, rolling.
 Soil, sandy, 2nd rate.
 Timber, mesquite.
 Undergrowth, greasewood, palo verde, catclaw, and yucca.

N.0°04'W., bet. secs. 21 and 22.
 Over level and slightly rolling land, through scattering undergrowth.

16.70 Wash, 30 lks. wide, 1 ft. deep, course NE.
 28.50 Wash, 10 lks. wide, 1 ft. deep, course NE.
 40.00 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap.

$\frac{1}{4}$



1924

No bearing trees available.
 Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

47.50 Road, brs NE. and SW.
 71.50 Gulch, course NE.
 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in

BOOK 3706

Survey of the Subdivisions of T6S, R22E.

34

Chains.

the ground, for cor. of secs. 15, 16, 21, and 22, marked on brass cap

T6S R22E	
S16	S15
S21	S22

-1924

No bearing trees available.

Raise mound of stone, 3ft. base, 2 ft. high, W. of cor.

Land, level and gently rolling.

Soil, sandy, 2nd rate.

Timber, none.

Undergrowth, greasewood, catclaw, yucca, and palo verde.

S.89°54'E., on random line bet. secs. 15 and 22.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.34 Intersect the N. and S. line, 2 lks. S. of the cor. of secs. 14, 15, 22, and 23.

Thence

N.89°55'W., on true line bet. secs. 15 and 22.

Over level land, through scattering undergrowth.

30.34 Road, brs NE. and SW.

35.34 Wash, 15 lks. wide, course NE.

40.18 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S15
S22

1924

No bearing trees available.

Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.

47.34 Wash, 40 lks. wide, 1 ft. deep, course NE.

67.04 Wash, 15 lks. wide, course NE.

80.34 The cor. of secs. 15, 16, 21, and 22.

Land, level and slightly rolling.

Soil, sandy loam, 2nd rate.

Timber, none.

Undergrowth, greasewood, catclaw, yucca, and palo verde.

N.0°04'W., bet. secs. 15 and 16.

Over rolling land, through scattering timber and undergrowth.

31.20 Wash, 15 lks. wide, course NW.

40.00 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap $\frac{1}{4}$

S16	S15
-----	-----

1924

from which

A mesquite, 8 ins. dia., brs N.1 $\frac{1}{2}$ °E., 130 lks. dist., marked $\frac{1}{4}$ S15 BT.A mesquite, 6 ins. dia., brs N.62°W., 26 lks. dist., marked $\frac{1}{4}$ S16 BT.

70.00 Enter valley, brs E. and W.

80.00 Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the ground, for cor. of secs. 14, 15, and 16, marked

Chains.

on brass cap

T6S	R22E
S 9	S10
S16	S15

1924

from which

- A mesquite, 8 ins. dia., brs N.22½°E., 174 lks. dist., marked T6S R22E S10 BT.
- A catclaw, 8 ins. dia., brs S.45½°E., 88 lks. dist., marked T6S R22E S15 BT.
- A mesquite, 12 ins. dia., brs S.73°W., 19 lks. dist., marked T6S R22E S16 BT.
- A catclaw 12 ins. dia., brs S.43°W., 210 lks. dist., marked T6S R22E S9 BT.

Land, rolling.
 Soil, sandy and gravelly, 2nd and 3rd rate.
 Timber, catclaw and mesquite.
 Undergrowth, greasewood, yucca, and cactus.

- 40.00 S.89°55'E., on random line bet. secs. 10 and 15.
- 80.34 Set temp. ¼ sec. cor.
- 80.34 Intersect. the cor. of secs. 10, 11, 14, and 15.

Thence

N.89°55'W., on true line bet. secs. 10 and 15.

Over level and rolling land, through scattering undergrowth.

- 20.34 Main wash, 100 lks. wide, course N.
- 40.17 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for ¼ sec. cor., marked on brass cap

¼	S10
	S15

1924

- No bearing trees available.
- 52.34 Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.
- 52.34 Wash, 20 lks. wide, course NE.; asc. slightly over NE. slope.
- 68.74 Top of ascent; thence desc. 160 ft. over W. slope.
- 80.34 The cor. of secs. 9, 10, 15, and 16.

Land, rolling.
 Soil, sandy loam, 2nd and 3rd rate.
 Timber, none.
 Undergrowth, greasewood, yucca, cactus.

- N.0°04'W., bet. secs. 9 and 10.
- Over level and rolling land, through scattering timber and undergrowth.
- 6.00 Main channel of wash, 100 lks. wide, 2 ft. deep, course N.10°E.
- 40.00 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for ¼ sec. cor., marked on brass cap

¼	
S 9	S10

1924

from which

- A catclaw, 12 ins. dia., brs S.67°E., 67 lks. dist.,

BOOK 3706

Survey of the Subdivisions of T6S,R22E.

36

Chains.

marked $\frac{1}{4}$ S10 BT.A mesquite, 8 ins. dia., brs S.40°W., 37 lks. dist.,
marked $\frac{1}{4}$ S9 BT.

- 50.00 Leave wash bottom land, thence over rolling NE. slope
57.00 Shallow wash, 40 lks. wide, course NE.
80.00 Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in
the ground, for cor. of secs. 3,4,9, and 10, marked
on brass cap

T6S R22E

S 4	S 3
S 9	S10

1924

No bearing trees available.

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling.

Soil, sandy loam, 2nd rate.

Timber, mesquite, catclaw.

Undergrowth, greasewood, yucca, and cacti.

- 40.00 S.89°55'E., on random line bet. secs. 3 and 10.
Set temp. $\frac{1}{4}$ sec. cor.
80.30 Intersect the N. and S. line, 9 lks. S. of the cor. of
secs. 2,3,10, and 11 .

Thence

N.89°59'W., on true line bet. secs. 3 and 10. .

Over rolling land, through scattering timber and under-
growth.

- 8.80 Wash, 60 lks. wide, 2 ft. deep, course N.
16.30 Wash, 15 lks. wide, course N.
31.30 Wash, 20 lks. wide, course N.
40.15 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

 $\frac{1}{4}$ S 3

S10

1924

Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor
No bearing trees available.

- 63.30 Enter wash bottom land, brs N. and S.
66.80 Main channel of wash, 150 lks. wide, 18 ins. deep, course
N.
75.80 Leave wash bottom land, brs N. and S.
80.30 The cor. of secs. 3,4,9, and 10.

Land, rolling.

Soil, sandy and gravelly, 2nd rate.

Timber, mesquite, catclaw.

Undergrowth, greasewood, yucca, and cacti.

- N.0°04'W., bet. secs. 3 and 4. .
Over level and rolling land, through scattering timber
and undergrowth.
17.00 Enter wash, from SW., course North, and follow down same.
25.00 Wash, 300 lks. wide, from SW.
40.00 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

 $\frac{1}{4}$

S 4 | S 3

1924

Survey of the Subdivisions of T6S,R22E.

BOOK 3706
37

Chains

from which

A mesquite, 6 ins. dia., brs. N.83 $\frac{1}{2}$ °W., 10 lks. dist., marked $\frac{1}{4}$ S4 BT.

A mesquite, 8 ins. dia., brs. S.77°E., 124 lks. dist., marked $\frac{1}{4}$ S3 BT.

42.00 Leave wash bottom, which turns to NE. Over rolling E. slope.

76.50 Intersect the First Standard Parallel S. at a point 13.51 chs. East of the of the standard $\frac{1}{4}$ sec. cor. of sec. 33, which is a sandstone 8x8x12 ins. above ground, firmly set, marked SC $\frac{1}{4}$ S33 on N. face, and witnessed by a mound of stone, 3ft. base 1 $\frac{1}{2}$ ft. high, N. of cor. No bearing trees.

At point of intersection, set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the ground, for closing cor. of secs. 3 and 4, marked on brass cap

T5S R22E
S33

S 4 | S 3

T6S R22E

SEC COR

1924

No bearing trees available.

Raise mound of stone, 3 ft. base, 2 ft. high, S. of cor.

Land, hilly and level.

Soil, sandy and gravelly, 2nd rate.

Timber, mesquite, and catclaw.

Greasewood, and sotol.

From the cor. of secs. 4,5,32, and 33 on the S. bdy. of the Tp., hereinbefore described.

N.0°04'W., bet. secs. 32 and 33.

Over very gently rolling land, through scattering timber and undergrowth.

11.00 Wash, 15 lks. wide, course NE.

25.00 Wash, 15 lks. wide, course NE.

36.50 (40.00 chs. S.0°04'E. from intersection with the sectional correction line())

Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$

S32 | S33

1924

No bearing trees available.

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor. Main wash, 80 lks. wide; 2 ft. deep; course NE.

59.50 Intersect the sectional correction line at 104 lks. W. of the temp. cor. of secs. 28,29,32, and 33. At point of intersection,

Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the ground for cor. of secs. 28,29,32, and 33, marked on brass cap

T6S R22E

S29 | S28

S32 | S33

1924

Chains.

from which

A mesquite, 6 ins. dia., brs N.70°E., 170 lks. dist.,
marked T6S R22E S28 BT.

A mesquite, 6 ins. dia., brs S.31½°E., 295 lks. dist.,
marked T6S R22E S33 BT.

A mesquite, 10 ins. dia., brs S.7½°W., 209 lks. dist.,
marked T6S R22E S32 BT.

No other tree available.

Land, gently rolling.

Soil, sandy, 2nd rate.

Timber, scattering mesquite,

Undergrowth, greasewood, palo verde, catclaw, and yucca

From the cor. of secs. 27, 28, 33, and 34.

West on sectional correction line bet. secs. 28 and 33.
Over gently rolling land, through scattering timber and
undergrowth.

Desc. 63 ft. over rolling W. slope.

22.02 Wash, 30 lks. wide, 2 ft. deep, course NE.; thence over
rolling land.

36.32 Wash, 20 lks. wide, course NE.

40.16 (Mid-point) set an iron post, 3 ft. long, 1 in. dia.,
27 ins. in the ground, for ¼ sec. cor., marked on brass
cap

¼ S28

S33

1924

from which

A mesquite, 5 ins. dia., brs N.10°E., 65 lks. dist.,
marked ¼ S28 BT.

A mesquite, 6 ins. dia., brs S.75°E., 290 lks. dist.,
marked ¼ S33 BT.

Desc. W. slope 70 ft.

58.32 Wash, 15 lks. wide, course NE.

60.32 Dim road, brs NE. and SW.

66.32 Wash, 70 lks. wide, 2 ft. deep, course NE.; asc. 70 ft.
over E. slope.

80.32 Intersect the cor. of secs. 28, 29, 32, and 33.

Land, rolling.

Soil, sandy, 2nd and 3rd rate.

Timber, mesquite,

Undergrowth, greasewood, catclaw, and palo verde.

N.0°04'W., bet. secs. 28 and 29.

Over slightly rolling land, through scattering timber
and undergrowth.

Desc. 115 ft. over N. slope.

26.50 Wash, 40 lks. wide, 2 ft. deep, course NE.

40.00 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the
ground, for ¼ sec. cor., marked on brass cap

¼

S29 | S28

1924

from which

A mesquite, 4 ins. dia., brs S.24°W., 61½ lks. dist.,
marked BT only.

A mesquite, 4 ins. dia., brs S.63°E., 168 lks. dist.,

Survey of the Subdivisions of T6S, R22E.

Chains.

marked $\frac{1}{4}$ S28 BT.
 Thence desc. slightly over NE. slope.
 76.00 Gulch, 5 lks. wide, course NW.
 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the ground, for cor. of secs. 20, 21, 28, and 29, marked on brass cap

T6S R22E
 S20 | S21
 S29 | S28

1924

No bearing trees available.
 Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.
 Land, rolling.
 Soil, sandy, 3rd rate.
 Timber, mesquite and catclaw.
 Undergrowth, greasewood, yucca, and cacti.

East on random line bet. secs. 21 and 28.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.32 Intersect the N. and S. line, 5 lks. N. of the cor. of secs. 21, 22, 27, and 28.

Thence
 N. 89° 58' W., on true line bet. secs. 21 and 28.
 Over rolling land, through scattering timber and undergrowth.
 22.52 Wash, 30 lks. wide, 6 ins. deep, course NE.
 32.20 Wash, 20 lks. wide, 2 ft. deep, course NE.
 40.16 Set an iron post, 3 ft. long, 1 in. dia., 4 ins. in the ground, to bed rock, deposit stone marked cross (X) at base of post, and raise mound of stone around post, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S21
 S28
 1924

No bearing trees available.
 43.00 Enter valley, brs N. and S.
 48.32 Wash, 30 lks. wide, 2 ft. deep, course N.
 53.12 Wash, 80 lks. wide, 2 ft. deep, course NE.
 57.30 Leave valley, brs N. and S.; asc. slightly to cor.
 80.32 The cor. of secs. 20, 21, 28, and 29.

Land, gently rolling.
 Soil, sandy, 2nd rate.
 Timber, scattering mesquite.
 Undergrowth, greasewood, catclaw, yucca.

N. 0° 04' W., bet. secs. 20 and 21.
 Over slightly rolling land, through scattering timber and undergrowth.
 Desc. 80 ft. over N. slope.
 14.50 Shallow wash, 15 lks. wide, course NE.
 30.00 Enter valley, brs NE. and SW.
 39.00 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for wit. cor. to $\frac{1}{4}$ sec. cor. of secs. 20 and 21, marked on brass cap.

$\frac{1}{4}$
 W | C
 S20 | S21
 1924

Chains.

- from which
- A catclaw, 6 ins. dia., brs S.28°W., 92 lks. dist., marked $\frac{1}{4}$ S20 WC BT.
- A catclaw, 8 ins. dia., brs N.47°E., 105 lks. dist., marked $\frac{1}{4}$ S21 WC BT.
- 40.00 True point for $\frac{1}{4}$ sec. cor. falls in wash, unsuitable for permanent cor.
- 40.20 Wash, 100 lks. wide, 2 ft. deep, course NE.
- 47.10 Road, brs NE. and SW.
- 67.80 Rocky wash, 15 lks. wide, course NE.
- 71.70 Wire fence, brs NE. and SW.
- 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 10 ins. in the ground, to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for cor. of secs. 16, 17, 20, and 21, marked on brass cap

T6S R22E
 S17 | S16
 S20 | S21

1924

No bearing trees available.

Land, slightly rolling.
 Soil, sandy and gravelly, 2nd and 3rd rate.
 Timber, scattering mesquite and catclaw.
 Undergrowth, greasewood, catclaw, palo verde and yucca.

- S.89°58'E., on random line bet. secs. 16 and 21.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.30 Intersect the N. and S. line, 2 lks. N. of the cor. of secs. 15, 16, 21, and 22.

Thence
 N.89°57'W., on true line bet. secs. 16 and 21.
 Over slightly rolling land, through scattering timber and undergrowth.

- 30.80 Enter valley, brs NE. and SW.
- 36.30 Wash, 300 lks. wide, 1 ft. deep, course NE.
- 40.15 True point for $\frac{1}{4}$ sec. cor. falls in channel of main wash 30 lks. wide, course NE.
- 40.65 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for wit. cor. to $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S16 WC
 S21

1924

- from which
- A catclaw, 8 ins. dia., brs N.38 $\frac{1}{2}$ °E., 60 lks. dist., marked $\frac{1}{4}$ S16 WC BT.
- A catclaw, 8 ins. dia., brs S.20 $\frac{1}{2}$ °W., 42 lks. dist., marked $\frac{1}{4}$ S21 WC BT.
- 45.60 Road, brs NE. and SW.
- 47.30 Leave valley, brs NE. and SW.; asc. slightly
- 70.30 Rocky wash, 15 lks. wide, course NE.
- 76.30 Wire fence, brs NE. and SW.
- 80.30 The cor. of secs. 16, 17, 20, and 21.

Land, rolling.
 Soil, sandy and gravelly, 2nd rate.
 Timber, mesquite and catclaw.
 Undergrowth, greasewood, catclaw, and yucca.


N.0°04'W., bet. secs. 16 and 17.

Survey of the Subdivisions of T6S,R22E.

BOOK 3706

Chains.

Over rolling land, through scattering timber and undergrowth.
 Desc. 60 ft. over NW. slope to
 7.60 Wash, 15 lks. wide, course NE.; thence desc. 60 ft. over rolling NE. slope.
 38.20 Wire fence, brs NW. and SE.
 40.00 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



1924

from which

- A mesquite, 8 ins. dia., brs N.75°E., 45 lks. dist., marked $\frac{1}{4}$ S16 BT.
- A mesquite, 6 ins. dia., brs S.36°W., 75 lks. dist., marked $\frac{1}{4}$ S17 BT.

41.00 Wash, 60 lks. wide, course NE.; thence over rolling land.
 59.00 Rocky gulch, course NE.
 65.00 Rocky gulch, course NE.
 69.50 Wash, 10 lks. wide, course NE.; asc. 80 ft. over SE.slope.
 75.00 Spur, slopes N.70°E.; desc. 30 ft. over NW. slope.
 79.60 Rocky gulch, course E.
 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the ground, for cor. of secs. 8,9,16, and 17, marked on brass cap



1924

No bearing trees available.

(Raise mound of stone 3 ft. base, 2 ft. high W. of cor.)

Land, rolling.
 Soil, sandy and gravelly, 2nd and 3rd rate.
 Timber, mesquite and catclaw.
 Undergrowth, greasewood, yucca, and cacti.

40.00 S.89°57'E., on random line bet. secs. 9 and 16.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.34 Intersect the cor. of secs. 9,10,15, and 16.


Thence

N.89°57'W., on true line bet. secs. 9 and 16.

Over rolling land, through scattering timber and undergrowth.

Desc. 15 ft. over W. slope.

1.60 Main channel of wash, 100 lks. wide, 2 ft. deep, course N.
 18.30 Wash, 30 lks. wide, course N.70°E.; asc. 60 ft. over E. slope.
 40.17 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



1924

No bearing trees available.

Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.

40.84 Enter wash, bottom, brs NE. and SW.
 44.34 Wash, 120 lks. wide, 8 ft. deep, course NE.
 49.80 Dim road, brs NE. and SW.
 56.74 Wash, 40 lks. wide, course NE.
 57.32 Leave wash bottom, brs NE. and SW.; asc. 150 ft. over E. slope.
 80.34 The cor. of secs. 8,9,16, and 17.

Survey of the Subdivisions of T6S,R22E.

Chains.

Land, rolling.
Soil, sandy loam, 2nd rate.
Timber, scattering mesquite and catclaw.
Undergrowth, greasewood, catclaw, yucca and cacti.


N.0°04'W., bet. secs. 8 and 9.
Over rolling land, through scattering undergrowth.
Asc. 220 ft. over SE. slope.

- 15.50 Spur, slopes E.; thence along E. slope.
- 27.50 Rocky gulch, course E.
- 40.00 True point for 1/4 sec. cor. falls on small cliff, unsuitable for permanent cor.
- 40.30 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for witness to 1/4 sec. cor., marked on brass cap



No bearing trees available.
Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.
Asc. 130 ft. over E. slope.

- 53.00 Top of main spur from Four mile mountain, slopes E.; desc. 225 ft. over NE. slope
- 71.00 Spur, slopes NE.; desc. 180 ft. over N. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 12 ins. in the ground, to bed rock, deposit stone marked cross (X) at base of post, and raise a mound of stone around post, for cor. of secs. 4,5,8, and 9, marked on brass cap




1924
No bearing trees available.
Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, mountainous.
Soil, rocky, 4th rate.
Timber, none, mesquite.
Undergrowth, sotol, greasewood, cacti, and yucca.

- 40.00 S.89°57'E., on random line bet. secs. 4 and 9.
Set temp. 1/4 sec. cor.
- 80.30 Intersect the N. and S. line. 23 lks. N. of the cor. of secs. 3,4,9, and 10.

Thence
N.89°47'W. on true line bet. secs. 4 and 9.
Over hilly land, through scattering timber and undergrowth
Over rolling NE. slope.

- 13.30 Shallow wash, 150 lks. wide, course NE.; asc. 330 ft. over E. slope.
- 39.30 Spur, slopes N.; desc. 15 ft. over W. slope to cor.
- 40.15 Set an iron post, 3 ft. long, 1 in. dia., 10 ins in the ground to bed rock, deposit stone marked with a cross (X) at base of post, and raise a mound of stone around post, for 1/4 sec. cor., marked on brass cap




Survey of the Subdivisions of T6S,R22E

Chains

- No bearing trees available.
- Desc. 90 ft. over W. slope.
- 46.80 Wash, 15 lks. wide, course N.20°E.; asc. 170 ft. over E. slope.
- 58.30 Long spur, slopes NE.; desc. 70 ft. over NW. slope.
- 70.30 Gulch, course NW.; asc. 60 ft. over E. slope.
- 74.30 Short spur, slopes N.; desc. 57 ft. over NW. slope.
- 80.30 The cor. of secs. 4,5,8, and 9.


Land, hilly.
 Soil, sandy, 2nd rate.
 Timber, scattering mesquite and catclaw.
 Undergrowth, greasewood, and sotol.

- N.0°04'W., bet. secs. 4 and 5.
- Over hilly land, through scattering timber and undergrowth
- Desc. 32 ft. over N. slope.
- 4.00 Gulch, course N.20°W.; asc. 70 ft. over S. slope.
- 10.00 Spur, slopes NE.; desc. 280 ft. over NE. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. dia.; 27 ins. in the ground, for 1/4 sec. cor., marked on brass cap



1924

- No bearing trees available.
- Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.
- Desc. slightly
- 43.00 Rocky canyon, 30 lks. wide, course N.20°W.; asc. 80 ft. along W. slope.
- 76.20 Intersect the First Standard Parallel South, at a point East 13136 chs. from standard 1/4 sec. cor. of sec. 32, which is a granite stone, 6x6x5 ins. above ground, firmly set, marked S 1/4 S 32 on N. face and witnessed by a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor. No bearing trees available. Standard on the S. bdy. of sec. 32, T6S, R22E., was retraced for alignment only)
- At point of intersection, set an iron post, 3 ft. long, 2 ins. dia., 20 ins. in the ground, to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for closing cor. of secs. 4 and 5, marked on brass cap



T6S R22E
 T6C CORNE

1924

No bearing trees available.


Land, hilly.
 Soil, rocky and sandy, 3rd rate.
 Timber, scattering mesquite and juniper.
 Undergrowth, yucca and cacti.

From the cor. of secs. 5,6,31, and 32 on the S. bdy. of the Tp., hereinbefore, described.

N.0°05'W., bet. secs. 31 and 32.
 Over general NE. slope, through scattering timber and undergrowth

Chains.

.35.11 (40.00 chs. S, 0°05'E., from intersection with the sectional correction line)
 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap




from which.

- A mesquite, 6 ins. dia., brs S.26 $\frac{1}{2}$ °W., 180 lks. dist., marked $\frac{1}{4}$ S31 BT.
- A mesquite, 4 ins. dia., brs N.36°E., 90 lks. dist., marked $\frac{1}{4}$ S32 BT.

42.20 Wash, 50 lks. wide, 2 ft. deep, course NE!

75.11 Intersect the sectional correction line at 108 lks. W. of temp. cor. of secs. 29, 30, 21, and 32. At point of intersection

Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the ground, for cor. of secs. 29, 30, 31, and 32, marked on brass cap



from which


- A mesquite, 4 ins. dia., brs S.26 $\frac{1}{2}$ °E., 71 lks. dist., marked BT only.
- A mesquite, 6 ins. dia., brs S.66 $\frac{1}{2}$ °W., 254 lks. dist., marked T6S R22E S31 BT.
- A catclaw, 8 ins. dia., brs N.61 $\frac{1}{2}$ °W., 292 lks. dist., marked T6S R22E S30 BT.
- No other tree available.

Land, rolling.
 Soil, sandy loam, 2nd rate.
 Timber, scattering mesquite, and catclaw.
 Undergrowth, greasewood, mesquite, yucca and cacti.

From the cor. of secs. 28, 29, 32, and 33.
 West on sectional correction line bet. secs. 29 and 32.
 Over rolling land, through scattering timber and undergrowth.

14.04 Wash, 40 lks. wide, 18 ins. deep, course NE.

40.02 Set an iron post, 3 ft. long, 1 in. dia., 4 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor., marked on brass cap



from which

- A mesquite, 6 ins. dia., brs South, 120 lks. dist., marked $\frac{1}{4}$ S32 BT.
- A mesquite, 6 ins. dia., brs N.58 $\frac{1}{2}$ °E., 132 lks. dist., marked $\frac{1}{4}$ S29 BT.

51.00 Wash, 40 lks. wide, 2 ft. deep, course N.

61.50 Wash, 50 lks. wide, 2 ft. deep, course NE.

80.04 Intersect the cor. of secs. 29, 30, 31, and 32.

Land, slightly rolling.
 Soil, sandy, 3rd rate.
 Timber, scattering mesquite and catclaw.
 Undergrowth, greasewood, cacti, and yucca.

Survey of the Subdivision of T6S, R22E.

Chains.	Thence West on sectional correction line bet. secs. 30 and 31. Over rolling and hilly land, through scattering timber and undergrowth. Desc. E. slope slightly.
3.40	Draw, course NE.; thence over broken land.
14.00	Dim road brs N.10°E. to Moody's lower ranch and S.10°W. to Moody's upper ranch.
21.00	Rocky canyon, 50 lks. wide, course NE.; asc. E. slope of mountain 90 ft.
40.00	Set an iron post, 3 ft. long, 1 in. dia., 20 ins. in the ground, to bed rock, deposit stone marked with a cross (X) at base of post, and raise a mound of stone around post, for ¼ sec. cor., marked on brass cap
	¼ S30 S31 1924
	from which A mesquite, 6 ins. dia., brs N.61¼°W., 12 lks. dist., marked ¼ S30 BT. A catclaw, 5 ins. dia., brs S.70°E., 61 lks. dist., marked ¼ S31 BT.
65.00	Asc. 115 ft. over E. slope. Rocky canyon, 25 lks. wide, course SE.; continue asc. 148 ft.
87.00	Moody's Goat ranch, brs S.26½°E. (Upper ranch)
91.84	Intersect the West bdy. of Tp. 30 and 31, surveyed due North, Cor. of secs. 30 and 31, established at this point, as hereinbe- fore described. Land, rolling and hilly. Soil, rocky and gravelly, 3rd rate. Timber, scattering mesquite and catclaw. Undergrowth, greasewood, cacti, and yucca.
	From the cor. of secs. 29, 30, 31, and 32. N.0°05'W., bet. secs. 29 and 30. Over mountainous land, through scattering timber and undergrowth. Desc. 34 ft. over N. slope.
6.00	Draw, course NE.; then over rolling land.
17.50	Dim road, brs NE. and SW.
40.00	Canyon, 50 lks. wide, course N.30°E. True point falls sec. cor. falls in wash of canyon, unsuitable for per- manent cor.
41.50	Set an iron post, 3 ft. long, 1 in. dia., 16 ins. in the ground to bed rock, in mound of stone, deposit stone marked with a cross (X) at base of post, for witness cor., marked ¼ sec. cor. marked on brass cap witness to
	¼ S30 S29 W.C. 1924
	from which A mesquite, 10 inns. dia., brs N.58°E., 18 lks. dist., marked ¼ S29 WC BT. A mesquite, 8 ins. dia., brs N.89°W., 53 lks. dist., marked ¼ S30 WC BT.
53.00	From this cor. Moody's lower ranch brs N.37½°E.
65.00	Rocky gulch, course NE.; asc. along E. slope 60 ft.
70.00	Moody's lower ranch brs S.21°E.
78.20	Spur, slopes E.; desc. 130 ft. over NE. slope. Gulch, course NE.; asc. 40 ft. over SE. slope.

46 chains.

80.00 Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the ground, for cor. of secs. 19, 20, 29, and 30, marked on brass cap

T6S	R22E
S19	S20
S30	S29
1924	

No bearing trees available.
 Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor. land, mountainous.
 Soil, rocky and gravelly, 3rd and 4th rate.
 Timber, scattering mesquite.
 Undergrowth, yucca, greasewood, and cacti.

40.00 East on random line bet. secs. 20 and 29.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.06 Intersect the N. and S. line, 5 lks. N. of the cor. of secs. 20, 21, 28, and 29.

Thence
 N. $89^{\circ}58'W.$; on true line bet. secs. 20 and 29.
 Over mountainous land, through scattering timber and undergrowth.
 Over rolling NW. slope.

34.56 Wash, 150 lks. wide, course N.

40.03 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S20	S29
1924	

from which

A catclaw, 6 ins. dia., brs S. $23\frac{1}{2}^{\circ}E.$, 28 lks. dist., marked $\frac{1}{4}$ S29 BT.

A catclaw, 6 ins. dia., brs N. $80^{\circ}E.$, 103 lks. dist., marked $\frac{1}{4}$ S20 BT.

41.86 Dim road, brs N. and S.

63.56 Main canyon, 100 lks. wide, course NE.; asc. 70 ft. over SE. slope.

74.76 Gulch, course NE.; asc. 60 ft. over SE. slope.

80.06 The cor. of secs. 19, 20, 29, and 30.

Land, rolling and mountainous.
 Soil, sandy 2nd rate.
 Timber, mesquite and catclaw.
 Undergrowth, greasewood, yucca and cacti.

40.00 West on random line bet. secs. 19 and 30.
 Set temp. $\frac{1}{4}$ sec. cor

91.40 Intersect the W. bdy. of the Tp., 16 lks. N. of the cor. of secs. 19 and 30, hereinbefore described.

Thence
 N. $89^{\circ}54'E.$, on true line bet. secs. 19 and 30.
 Over rolling and mountainous land, through scattering timber and undergrowth.

Desc. 400 ft. over SE. slope.

41.40 Spur, slopes SE.; desc. 250 ft. over E. slope.

51.40 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S19	S30
1924	


Survey of the Subdivisions of T6S, R22E.

Chains


No bearing trees available.
 Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.
 Desc. 635 ft. over E. slope.
 91.40 The cor. of secs. 19, 20, 29, and 30.

Land, mountainous.
 Soil, rocky, 3rd and 4th rate.
 Timber, mesquite and catclaw.
 Undergrowth, greasewood, yucca and cacti.

N.0°05'W., bet. secs. 19 and 20.
 Over mountainous land, through scattering timber and
 undergrowth.
 Asc. 46 ft. over SE. slope.
 10.00 Low spur, slopes NE.; desc. 70 ft. over N. slope.
 14.20 Gulch, course NE.; asc. 250 ft. over SE. slope.
 33.00 Spur, slopes N.70°E.; desc. 160 ft. over NE. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. dia., on cross (X)
 on bed rock, and raise a mound of stone around post
 for $\frac{1}{4}$ sec. cor., marked on brass cap



No bearing trees available.
 Desc. 170 ft. over N. slope.
 45.70 Small house brs 50 lks. W.
 46.50 Canyon, with small stream in bottom, 1 lk. wide, 6 ins.
 deep, course E.; asc. 160 ft. over S. slope.
 55.00 Low rolling spur, slopes E.; desc. 50 ft. over N. slope.
 59.20 Gulch, course E.
 65.00 Rocky gulch, course E.; asc. 350 ft. over SE. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 10 ins. in
 the ground to bed rock, deposit a stone marked with a
 cross (X) at base of post and raise a mound of stone
 around post for cor. of secs. 17, 18, 19, and 20, marked
 on brass cap



from which
 A catclaw, 5 ins. dia., brs N.35 $\frac{1}{2}$ °E., 113 lks. dist.,
 marked T6S R22E S 17 BT.
 No other trees available.
 Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, mesquite and catclaw.
 Undergrowth, greasewood, yucca, and catclaw.

S.89°58'E., on random line bet. secs. 17 and 20.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.96 Intersect the N. and S. line, 2 lks. N. of the cor. of
 secs. 16, 17, 20, and 21.

Thence
 N.89°57'W., on true line bet. secs. 17 and 20.
 Over mountainous land, through scattering timber and
 undergrowth.
 Desc. 40 ft. over NW. slope.
 12.00 Wash, 10 lks. wide, course NE.; asc. 75 ft. over SE.

Chains.

slope.
 27.00 Spur, slopes NE.; desc. 40 ft. over NW. slope.
 32.45 Dim road, brs N. and S.
 34.00 Wash, 50 lks. wide, course NE.; asc. 70 ft. over E. slope.
 39.98 Set an iron post, 3 ft. long, 1 in. dia., 6 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post and raise a mound of stone around post for $\frac{1}{4}$ sec. cor., marked on brass cap.

$\frac{1}{4}$ S17
 S20
 1924

No bearing trees available.
 Asc. 420 ft. over E. slope to spur.
 68.00 Spur, slopes SE.; continue ascent 100 ft. over E. slope.
 75.16 Wire fence, brs N. and S.
 79.96 The cor. of secs. 17, 18, 19, and 20.

Land, mountainous.
 Soil, rocky, 3rd and 4th rate
 Timber scattering mesquite and catclaw.
 Undergrowth, greasewood, yucca, and cacti.

S.89°54'W., on random line bet. secs. 18 and 19.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 91.60 Intersect the W. bdy. of the Tp., 35 lks. S. of the cor. of secs. 18 and 19., hereinbefore described.
 Thence
 S.89°53'E., on true line bet. secs. 18 and 19.
 Over mountainous land, through scattering timber and undergrowth.
 Desc. 150 ft. over NE. slope.
 8.60 Canyon, with stream of water, 1 lk. wide, 3 ins. deep, course SE.
 21.60 Bend in same canyon with stream of water 1 lk. wide, 3 ins. deep, from SW., course SE.; asc. 200 ft. over SW slope.
 51.60 Set an iron post, 3 ft. long, 1 in. dia., 12 ins. in the ground, to bed rock, deposit stone marked with a cross (X) at base of post, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S18
 S19
 1924

No bearing trees available.
 67.60 Spur, slopes S.20°E.; desc. 200 ft. over SE. slope.
 72.90 Canyon, course S.; asc. 180 ft. over SW. slope.
 83.10 Spur, slopes SE.; desc. 120 ft. over SE. slope.
 91.60 The cor. of secs. 17, 18, 19, and 20.

Land, mountainous.
 Soil, rocky 4th rate.
 Timber, juniper and pinyon.
 Undergrowth, scrub oak, manzanita, and yucca.

N.0°05'W., bet. secs. 17 and 18.
 Over mountainous land, through scattering timber and undergrowth.
 Asc. 430 ft. over SE. slope to $\frac{1}{4}$ sec. cor.
 40.00 Set an iron post, 3 ft. long, 1 in. dia., 4 ins. in the ground, to bed rock, deposit stone marked with a cross (X) at base of post, and raise a mound of stone around post for $\frac{1}{4}$ sec. cor., marked on brass cap.

Chains.

$\frac{1}{4}$
 S18 | S17
 1924

from which
 A mesquite, 8 ins. dia., brs N.51 $\frac{1}{2}$ °E., 104 lks. dist.,
 marked $\frac{1}{4}$ S17 BT.
 No other tree available.
 From this cor. a ranch house brs S.53°E.
 Asc. 430 ft. over SE. slope. to sec. cor.
 53.00 Spur, slopes S.60°E.; continue asc.
 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 12 ins. in the
 ground, to bed rock, deposit stone marked cross (X)
 at base of post, and raise a mound of stone around post
 for cor. of secs. 7,8,17, and 18., marked on brass cap

T6S R22E
 S 7 | S 8
 S18 | S17

1924

from which
 A juniper, 8 ins. dia., brs N.86°E., 393 lks. dist.,
 marked T6S R22E S8 BT.
 A juniper, 16 ins. dia., brs S.33 $\frac{1}{2}$ °E., 502 lks. dist.,
 marked T6S R22E S17 BT.
 A juniper, 10 ins. dia., brs S.44°W., 290 lks. dist.,
 marked T6S R22E S18 BT.
 No other tree available.

Land, rough and mountainous.
 Soil, rocky, 4th rate.
 Timber, juniper and mesquite.
 Undergrowth, manzanita and scrub oak.

40.00 S.89°57'E., on random line bet. secs. 8 and 17.
 79.94 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect the cor. of secs. 8,9,16, and 17.

Thence
 N.89°57'W., on true line bet. secs. 8 and 17.
 Over rough mountainous land, through scattering timber
 and undergrowth.
 Asc. rocky E. slope 800 ft. to $\frac{1}{4}$ sec. cor.
 39.97 Set an iron post, 3 ft. long, 1 in. dia., 15 ins. in the
 ground, to bed rock, deposit a stone marked with a cross
 (X) at base of post and raise a mound of stone around
 post, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 8
 S17
 1924

from which
 A mesquite, 6 ins. dia., brs S.15°E., 77 lks. dist.,
 marked $\frac{1}{4}$ S17 BT.
 No other tree available.
 Asc. 800 ft. over E. slope.
 79.94 The cor. of secs. 7,8,17, and 18.

Land, mountainous and rough.
 Soil, rocky, 4th rate.
 Timber, mesquite.
 Undergrowth, greasewood, manzanita and yucca.

Survey of the Subdivisions of T6S,R22E.

BOOK 3706

56

Chains.

N.89°53'W., on random line bet. secs. 7 and 18.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

91.52 Intersect the W. bdy. of the Tp. at the cor. of secs. 7 and 18, hereinbefore described.

Thence

S,89°53'E., on true line bet. secs. 7 and 18.

Over mountainous land, through scattering timber and undergrowth.

Asc. 220 ft. over W. slope.

10.52 Spur, slopes NW.; desc. slightly along broken N. slope.

51.52 Set an iron post, 3 ft. long, 1 in. dia., 4 ins. in the ground, to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 7
S 18
1924

No bearing trees available.

54.52 Head of canyon, course NW.; asc. 140 ft. over NW. slope.

59.52 Top of main ridge, brs N. and S.; desc. 280 ft. over NE. slope. to cor.

91.52 The cor. of secs. 7, 8, 17, and 18.

Land, rough mountains.

Soil, rocky 4th rate.

Timber, juniper and mesquite.

Undergrowth, manzanita and scrub oak.

N.0°05'W., bet. secs. 7 and 8.

Over mountainous land, through scattering timber and undergrowth.

Desc. 460 ft. over NE. slope.

13.50 Gulch, course N.70°E.; asc. 100 ft. over SE. slope.

30.00 Spur, slopes E.; desc. 180 ft. over NE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. dia., 15 ins. in the ground, to bed rock, deposit stone marked cross (X) at base of post, for $\frac{1}{4}$ sec. cor., and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S 7 | S 8
1924

from which

A juniper, 8 ins. dia., brs S.55°E., 160 lks. dist., marked $\frac{1}{4}$ S8 BT. No other bearing trees available.

Desc. 30 ft. over NE. slope.

41.20 Rocky gulch, course N.70°E.; asc. 160 fts. over SE. slope.

57.00 Spur, slopes NE.; desc. 725 ft. over NE. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. dia., 15 ins. in the ground, to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for cor. of secs. 5, 6, 7, and 8, marked on brass cap

T6S R22E.
S 6 | S 5
S 7 | S 8
1924

from which

A pinyon, 10 ins. dia., brs S.72 $\frac{1}{2}$ °E., 160 lks. dist., marked T6S R22E S8 BT.

No other trees available.

Survey of the Subdivisions of T6S,R22E.

Chains.

Land, rough mountainous.
Soil, rocky, 4th rate.
Timber, juniper and mesquite.
Undergrowth, manzanita, scrub oak, and yucca

40.00 S.89°57'E., on random line bet. secs. 5 and 8.
79.92 Set temp. 1/4 sec. cor.
Intersect the cor. of sess. 4,5,8, and 9.

Thence
N.89°57'W., on true line bet. secs. 5 and 8.
Over mountainous land, through scattering timber and undergrowth.

3.50 Draw, course NE.; asc. 70 ft. over E. slope.
10.20 Spur, slopes NE.; desc. 105 ft. over W. slope.
19.50 Wash, 10 lks. wide, course N.; asc. 210 ft. over E. slope
32.00 Spur, slopes N.20°E.; thence over gentle NW. slope on slight descent.
39.96 Set an iron post, 3 ft. long, 1 in. dia., on cross (X) on bed rock, and raise a mound of stone around post, for 1/4 sec. cor., marked on brass cap

1/4 S 5
S 8

1924

No bearing trees available.
Desc. 130 ft. over NW. slope.
53.00 Gulch, course NE.; asc. 250 ft. over E. slope.
70.00 Spur, slopes N.; desc. 80 ft. over NW. slope.
79.92 The cor. of secs. 5,6,7, and 8.

Land, hilly.
Soil, rocky, 3rd and 4th rate.
Timber, mesquite and juniper.
Undergrowth, sotol, cacti.

40.00 N.89°53'W., on random line bet. secs. 6 and 7.
91.50 Set temp. 1/4 sec. cor.
Intersect the W. bdy. of the Tp., 3 lks. S. of the cor. of secs. 6 and 7, hereinbefore described.

Thence
S.89°52'E., on true line bet. secs. 6 and 7.
Over mountainous land, through scattering timber and undergrowth.

Desc. 150 ft. over E. slope.
9.30 Canyon, course N.30°W.; asc. 110 ft. over W. slope
19.30 Spur, slopes NW.; thence over broken N. slope.

51.50 Set an iron post, 3 ft. long, 1 in. dia., 12 ins. in the ground to bed rock, deposit stone marked cross (X) at base of post, and raise mound of stone, around post, for 1/4 sec. cor. marked on brass cap

1/4 S 6
S 7

1924

No bearing trees available.
Thence on slight descent over broken N. slope.

91.50 The cor. of secs. 5,6,7, and 8.

Chains


Land, mountainous
Soil, rocky, 4th rate.
Timber, juniper and pinyon.
Undergrowth, scrub oak, manzanita and yucca.

N.0°05'W., bet. secs. 5 and 6.
Over mountainous land, through scattering timber and undergrowth.

35.30 Desc. 440 ft. over NE. slope.
Old road, brs NE. and SW.

37.20 Rocky gulch, course NE.; asc. 60 ft. over S. slope.

40.00 Set an iron post, 3 ft. long, 1 in. dia., 12 ins. in the ground, to bed rock, deposit stone marked cross (X) at base of post and raise a mound of stone around post, for 1/4 sec. cor., marked on brass cap.



No bearing trees available.


47.00 Asc. 150 ft. over SE. slope.

57.80 Spur, slopes E.; desc. 160 ft. over NE. slope.

76.06 Gulch, course E.; asc. 50 ft. over SE. slope.

Intersect the First Standard Parallel South, at a point 13.50 chs. East of the standard 1/4 sec. cor. of sec. 31, which is a granite stone, 12x8x4 ins. firmly set, marked SC 31 on N. face and witnessed by a mound of stone 2 ft. base, 1 1/2 ft. high, N. of cor. (Note, the east half of this line of sec. 31, T5S R22E., was retraced for alignment only)

At point of intersection, set an iron post, 3 ft. long, 2 ins. dia., 10 ins. in the ground, to bed rock, deposit a stone marked with a cross (X) at base of post and raise a mound of stone around post for closing cor. of secs. 5 and 6, marked on brass cap



No bearing trees available.

Land, hilly.
Soil, 3rd and 4th rate.
Timber, mesquite and juniper.
Undergrowth, catclaw, sotol, yucca, and cacti.

The continued satisfactory adjustment of the solar during the survey of this township is indicated from tests as described in book "J"

GENERAL DESCRIPTION

LAND; Mountainous along West boundary of Township, becoming rolling toward the east, and along the east boundary it becomes almost level. Approximate elevation of the east boundary is 3500 ft. above sea level. Drainage to NE.

SOIL; Sandy loam, 2nd rate on East side and rocky and sandy on west side, 3rd and 4th rate.

TIMBER; mesquite, juniper and catclaw.

UNDERGROWTH; greasewood, yucca, cacti, catclaw, and palo verde.

EVIDENCE OF MINERAL; None.

SETTLEMENT; Wm Moody operates a goat ranch in section 36, and has a lower ranch in section 29. Both places have a supply of water. We also found water in sec. 19 and a spring in section 17 that runs only in the winter.

INDUSTRY; This township is suitable for grazing only.

CERTIFICATE OF UNITED STATES SURVEYOR.

56

I, Glenn F. Sawyer, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 125, Arizona, bearing date of the 24th day of October, 1923, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, ~~surveyed~~ ^{retraced} all those parts or portions of the South and East boundaries; and resurveyed all those parts or portions of the South boundary; and surveyed all those parts or portions of the First Standard Parallel South, thru. part of Range 21 East, West boundary, and Subdivision lines of TOWNSHIP 6 SOUTH, RANGE 22 EAST, of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in and by diagram on page 1 hereof the foregoing field notes/as having been executed by me, and under my direction; and that all the corners of said retracement, resurvey and survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 125, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such retracement, resurvey and survey.

Glenn F. Sawyer
 U. S. Surveyor.
 Phoenix, Arizona
 October 23, 1924

APPROVAL.

OFFICE OF U.S. SUPERVISOR OF SURVEYS,

Denver, Colorado, March 20, 1926.

The foregoing field notes of the retracement of the East boundary, and part of the South boundary; and of the resurvey of Part of the South boundary; and of the Survey of the First Standard Parallel South, thru. part of Range 21 East, West boundary and Subdivision lines, all of TOWNSHIP 6 SOUTH, RANGE 22 EAST, of the Gila and Salt River Base and Meridian, in the State of Arizona, executed by Glenn F. Sawyer, U.S. Surveyor, for Group 125, Arizona,

under his special instructions dated October 24, 1923, for Group 125, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the retracements, resurveys and surveys they describe, are hereby approved.

Walter Johnson
 U. S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above described surveys in _____, has been correctly copied from the original notes on file in this office.