

3713

4-679

BOOK "C"

BOOK 3713

FIELD NOTES

OF THE SURVEY OF THE

West boundary, and

Subdivision lines of

TOWNSHIP 8 NORTH, RANGE 2 WEST,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

Glenn F. Sawyer, U. S. Surveyor
and

Wesson Cook, U. S. Transitman

In the capacity of U. S. Surveyors, under Special Instructions dated April 10, 1924 issued by the United States Surveyor General to govern surveys included in Group No. 129 Arizona, which were approved by the Commissioner of the General Land Office, April 29, 1924, and Assignment Instructions dated Nov. 25, 1924.

Survey commenced January 12, 1925

Survey completed February 3, 1925

3713

3713

3713


1A

Book "C"

Group 129 - Arizona.

BOOK 3713

INDEX DIAGRAM.

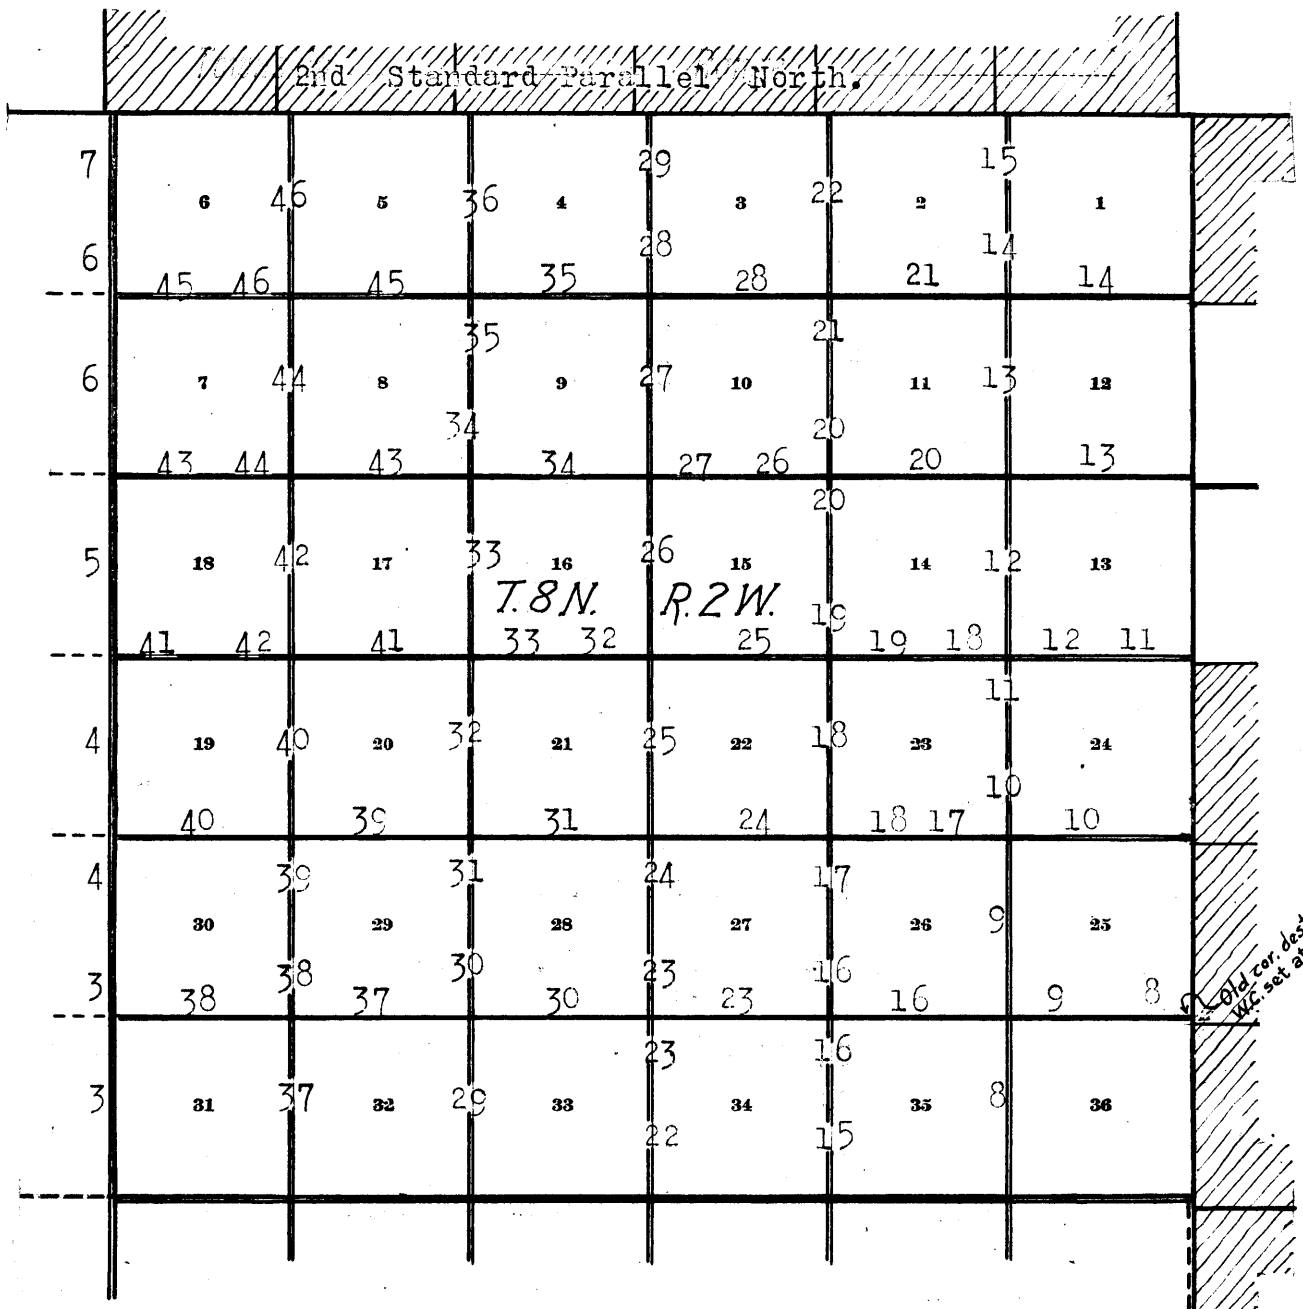


————— Surveyed under this group.

- - - - - Resurveyed under this group.

————— Accepted surveys.

- - - - - Unsurveyed.

 Areas surveyed as per accepted plats on file.

Book "C"
 Group 129 - - Arizona.
 Township 8 North, Range 2 West.

DATE DIAGRAM
 1925.

Second Standard Parallel North

1-16	6 1-16	1-26	5 1-30	1-30	4 1-29	1-31	3 2-1, 1-30	1-31	2 1-30	1-30	1 1-29
1-15	7 1-24	1-26	8 1-24	1-27	9 1-23	1-31	10 2-1	1-30	11 1-31	1-29	12 1-29
1-15	18 1-23	1-24	17 1-22	1-23	16 1-22	1-23, 1-23	15 1-20	1-19	14 1-19	1-15	13 1-15
1-14	19 1-22	1-22	20 1-22, 1-21	1-22	21 1-21	1-20	22 1-19	1-19	23 1-17	1-14	24 1-13, 1-14
1-14	30 1-21	1-21, 1-22	29 1-21, 1-20	1-21	28 1-21	1-19	27 1-17	1-17	26 1-16	1-13	25 1-12
1-14	31 1-21	1-21	32 1-20	1-20	33 1-21	1-17	34 1-16	1-16	35 1-12	1-12	36

For dates of survey of this line, see Book "B"

— Surveyed by Glenn F. Sawyer, U.S. Surveyor, on dates shown thereon.

— Surveyed by Wesson Cook, U.S. Transitman, on dates shown thereon.

— Surveyed under this group, notes and dates in other books.

— Lines of accepted surveys or resurveys.

Surveys herein described were executed on dates shown on diagram on page 1 hereof, by Glenn F. Sawyer, U. S. Surveyor and Wesson Cook, U. S. Transitman, using respectively, Young and Sons light mountain transits No's 8478 and 8541, each equipped with full vertical circle and Smith solar attachment; unless otherwise specified, all azimuth determinations are accomplished with the solar attachment.

For preliminary tests of solar transits 8478 and 8541, see final test on page 57, Book "B", made Jan. 11, 1925.

POLARIS OBSERVATION.

Jan. 17, 1925: At camp in the NE. $\frac{1}{4}$ of sec. 28, T8N, R2W., G. and S. R. Base and meridian, latitude, $34^{\circ}01'N.$, longitude $112^{\circ}28'W.$, at 11h 43m p.m., l.m.t., I, Glenn F. Sawyer with instrument No. 8478, observe Polaris at western elongation, making four observations, two each with the telescope in direct and reversed positions, and mark the mean point in line thus determined on a peg driven firmly in the ground 5 chs. northerly.

Azimuth of Polaris at western elongation = $1^{\circ}19'$

Jan. 18, 1925: At 8h 0m a.m., l.m.t., I lay off the azimuth of Polaris, $1^{\circ}19'$ to the east and mark the meridian thus determined by a tack in a peg driven firmly in the ground, 5 chs. N.

Unless otherwise specified, all measurements are made with Lufkin steel tapes, 5 chs. in length, compared with a Lufkin 1 ch. standard steel tape and found correct. The measurements are made on the slope, the vertical angle determined and the slope measurements properly reduced to true horizontal distances.

Chains

Survey of the West boundary of T8N, R2W.

From the cor. of Tps. 7 and 8 N., Rs. 2 and 3 W., described in book "B"

North, on true line bet. secs. 31 and 36.
Over mountainous land, through heavy undergrowth.
Asc. 33 ft. over S. slope.

- 6.10 Spur, slopes SE.; desc. 07 ft. over NE. slope.
- 12.60 Wash, 100 lks. wide, course SE.; asc. 292 ft. over SW. slope.
- 24.40 Gulch, course SW.
- 36.80 Spur, slopes SW.; desc. 37 ft. over NW. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



1925

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.
Desc. 30 ft. over N. slope.
40.70 Draw, course S.70°W.; asc. 229 ft. over steep S. slope.
50.90 Divide, brs N.60°W. and S.60°E.,; desc. 206 ft. over N. slope.

- 55.50 Road, brs NE. and SW.
- 59.70 Draw, course E.; asc. 103 ft. over S. slope.
- 63.70 Spur, slopes E.; desc. 49 ft. over N. slope.
- 66.00 Draw, course E.; asc. 128 ft. over S. slope.
- 69.80 Spur, slopes E.; desc. 78 ft. over N. slope.
- 73.80 Draw, course E.; asc. 95 ft. over SE. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 3 ft. base, 1½ ft. high, for cor. of secs. 25, 30, 31, and 36, marked on brass cap



1925

Building brs S.26¼°E.
Land, rolling mountains.
Soil, sandy and rocky, 3rd rate.
Timber, none.
Undergrowth, sage brush, oak, buck brush, mesquite and cacti.

North, bet. secs. 25 and 30.
Over rolling mountains, through scattering timber and undergrowth.

- .20 Spur, slopes E.; desc. 193 ft. over N. slope.
- 8.40 Draw, course N.70°E.; asc. 62 ft. over SE. slope.
- 10.70 Spur, slopes E.; desc. 46 ft. over NE. slope.
- 13.50 Draw, course SE.; asc. 208 ft. over SW. slope.
- 19.00 Slope changes to SE.
- 26.30 Ridge, brs NE. and SW.; desc. 226 ft. over NW. slope.

Chains.

40.00	Same building brs S. $14\frac{3}{4}^{\circ}$ E. Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, around post, for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S25 S30 1925
43.30	Desc. 59 ft. over NW. slope. Head of draw, course N. 70° W.; asc. 102 ft. over SW. slope.
51.70	Spur, slopes W.; desc. 314 ft. over NW. slope.
71.00	Wash, 140 lks. wide, course NE.; asc. 72 ft. over SE. slope.
74.80	Spur, slopes E.; desc. 70 ft. over N. slope.
77.70	Wash, 80 lks. wide, course E.; asc. 70 ft. over S. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 19, 24, 25, and 30, marked on brass cap
	T8N R3W R2W S24 S19 S25 S30 1925
	Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.
	Land, rolling mountains. Soil, sandy and rocky, 3rd rate. Timber, none. Undergrowth, sage brush, oak brush, cacti, mesquite, and ocotilla.
	North, bet. secs. 19 and 24. Over rolling mountains, through dense undergrowth. Asc. 33 ft. over S. slope.
2.00	Spur, slopes E.; desc. 68 ft. over NE. slope.
5.60	Draw, course E.; asc. 116 ft. over S. slope.
9.30	Spur, slopes E.; desc. 164 ft. over N. slope.
18.90	Draw, course E.; asc. 265 ft. over S. slope.
20.50	Gulch, clurse SE.
38.70	Spur, slopes SE.; desc. 23 ft. over NE. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 3 ft. base, $1\frac{1}{2}$ ft. high, for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S24 S19 1925
48.60	Desc. 80 ft. over NE. slope. Draw, course SE.; asc. 147 ft. over S. slope.
55.00	Spur, slopes SE.; desc. 205 ft. over N. slope.
71.00	Draw, course N. 80° E.; asc. 102 ft. over SE. slope.
75.00	Spur, slopes E.; desc. 96 ft. over NE. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 13, 18, 19, and 24, marked on brass cap

Chains.

T8N	
R3W	R2W
S13	S18
S24	S19

1925

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling mountains.
 Soil, sandy and rocky, 4th rate.
 Timber, none.
 Undergrowth, sage brush, oak brush, buck brush, and cacti.

North, bet. secs. 13 and 18.
 Over rolling mountains, through heavy undergrowth.
 Desc. 49 ft. over NE. slope.

- 2.20 Draw, course SE.; asc. 95 ft. over S. slope.
- 6.00 Spur, slopes SE.; desc. 106 ft. over NE. slope.
- 11.20 Draw, course E.; asc. 70 ft. over S. slope.
- 13.70 Spur, slopes E.; desc. 68 ft. over NE. slope.
- 19.00 Enter Buck Horn Creek, dry, course S.60°E.
- 23.30 Road, brs E. and W.
- 25.50 Leave Buck Horn creek, brs S.60°E.; asc. 223 ft. over steep S. slope.
- 29.70 Slope changes to SW.
- 37.10 Spur, slopes SE.; desc. 71 ft. over NE. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 3 ft. base, 16 ins. high, for 1/4 sec. cor., marked on brass cap

1/4

S13	S18
-----	-----

1925

- 44.60 Desc. 96 ft. over NE. slope.
Wash, 300 lks. wide, course SE.; asc. 293 ft. over S. slope.
- 58.50 Ridge, brs N. and S.60°E.; desc. 70 ft. over N. slope.
- 67.20 Head of draw, course W.; asc. 121 ft. over S. slope.
- 71.90 Top of hill, sloping W.; desc. 18 ft. over NW. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 7,12,13, and 18, marked on brass cap

T8N	
R3W	R2W
S12	S 7
S13	S18

1925

Land, rolling mountains.
 Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling mountains.
 Soil, rocky and sandy, 3rd rate.
 Timber, none.
 Undergrowth, oak brush, sage brush, mesquite, cacti, and buck brush.

Chains.	North, bet. secs. 7 and 12. Over rolling mountains, through scattering undergrowth. Desc. 21 ft. over NW. slope.
2.60	Low saddle in ridge, brs N.10°W. and S.10°E.; asc. 71 ft. over SE. slope.
6.90	Spur, slopes E.; desc. 203 ft. over NE. slope. Monument on peak, brs N.42°23'E.
21.10	Wash, 30 lks. wide, 3 ft. deep, course E.; asc. 22 ft. over S. slope.
	Goat shed brs E., 3.00 chs. dist.
23.00	Road, brs E. and W.
	Spur, slopes E.; desc. 23 ft. over N. slope.
25.20	Wash, 30 lks. wide, course SE.; asc. 142 ft. over SW. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S12 S 7 1925
	Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor. Asc. 129 ft. over S. slope.
45.10	Spur, slopes SW.; desc. 171 ft. over NW. slope
59.90	Draw, course NE.; asc. 94 ft. over SE. slope.
65.50	Spur, slopes E.; desc. 106 ft. over NE. slope.
70.30	Telephone line, brs E. and W.
75.70	Wash, 60 lks. wide, course S.70°E.; asc. 77 ft. over S. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 4 ft. base, 28 ins. high, for cor. of secs. 1, 6, 7, and 12, marked on brass cap
	T8N R3W R2W S 1 S 6 S12 S 7 1925
	Land, rolling mountains. Soil, sandy and rocky, 3rd rate. Timber, none. Undergrowth, oak brush, sage brush, spanish dagger, and mesquite.
	North, bet. secs. 1 and 6. Over rolling mountains, through heavy undergrowth. Asc. 113 ft. over SW. slope.
5.50	Spur, slopes SW.; desc. 33 ft. over NW. slope.
13.00	Head of draw, course S.60°W.; asc. 609 ft. over S. slope.
33.74	Monument on top of peak, brs S.29°42'E.
33.80	Ridge, brs NW. and SE.; desc. 64 ft. over NE. slope.
38.80	Head of draw, course S.60°E.; asc. 36 ft. over SE. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone, 3 ft. base, 20 ins. high, around post, for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S 1 S 6 1925

Chains.

46.70
66.80
75.08

Asc. 79 ft. over SE. slope.
Spur, slopes SE.; desc. 332 ft. over N. slope.
Draw, course NW.; asc. 99 ft. over SW. slope.
Intersect the Second Standard Parallel North, at a point 2.76 chs. E. of the standard cor. of T9N, Rs. 2 and 3 W., which is an iron post, 3 ins. in diam., firmly set, properly marked on brass cap., and witnessed by mound of stone N. of post. At point of intersection, set an iron post, 3 ft. long, 3 ins. diam., 28 ins. in the ground, for closing township cor. for T8N, Rs 2 and 3 W. marked on brass cap

T9N R2W
S31
S 1 S 6
R3W R2W
CC
T8N
1925

Raise mound of stone, 4 ft. base, 2 ft. high, S. of cor.

Land, mountains.
Soil, sandy and rocky, 3rd and 4th rate.
Timber, none.
Undergrowth, oak brush, sage brush, catclaw, cacti, and mesquite.

Chains.

From the cor. of secs. 1,2,35, and 36, on the S. bdy. of the Tp., described in book "B"

N.0°1'W., bet. secs. 35 and 36.

Over rolling mountains, through scattering undergrowth. Asc. 79 ft. over S. slope.

5.06 Top of spur, slopes S.; desc. 22 ft. over N. slope.

9.92 Draw, course SE.; asc. 34 ft. over S. slope.

17.51 Spur, slopes SE.; desc. 32 ft. over N. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 3 ft. base, 16 ins. high, for $\frac{1}{4}$ sec.cor., marked on brass cap

$\frac{1}{4}$

S35|S36

1925

Along W. slope.

42.90 Wash, 40 lks. wide, 2 ft. deep, course E.; asc. 36 ft. over S. slope.

46.92 Top of spur, slopes E.; desc. 34 ft. over N. slope.

50.72 Wash, course SE.; asc. 519 ft. over S. slope.

57.32 Spur, slopes SW.; continue asc.

59.80 Draw, course SW.; continue asc.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 25,26,35, and 36, marked on brass cap

T8N R2W

S26|S25

S35|S36

1925

Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. Land mountainous.

Soil, rocky and sandy, 3rd rate.

Timber, none.

Undergrowth, palo verde, greasewood, cacti, sage brush, mescal and ocotilla.

East, on random line bet. secs. 25 and 36.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.96 Intersect the E. bdy. of the Tp., 26 lks. S. of the cor. of secs. 25 and 36, which is a malpais stone, in place, 4x2x1 ft., marked with 1 notch on S. and 5 notches on N. faces and witnessed by a mound of stone W. of cor. As this cor. is in poor condition and it is impossible to set an iron post at true point for cor., destroy all markings and evidence of old cor. and at 8 lks. S. of true point for cor., set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 3 ft. base, 21 ins. high, for witness^{cor.} to cor. of secs. 25 and 36 only, marked on brass cap

WC

T8N R2W

S30|S25

S31|S36

1925

(Note: above marking applies to a W.C. to a four sec. cor., but error was not discovered until after completing survey and departure from the field.)

Chains.

From the true point for cor. of secs. 25, and 36,
 Thence
 S.89°49'W., on true line bet. secs. 25 and 36.
 Over rolling mountains, through scattering undergrowth.
 Asc. slightly over E. slope.

.60
 5.20
 9.50
 20.10
 22.39
 39.98

Spur, slopes NE.; desc. 23 ft. over W. slope.
 Wash, course SE.; asc. 57 ft. over E. slope.
 Spur, slopes S.; desc. slightly over W. slope.
 Wash, course SE.
 Wash, course SE.; asc. 93 ft. over E. slope.
 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S25
 S36
 1925

Raise mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
 The $\frac{1}{4}$ sec. cor. falls on Spur, sloping SE.
 Asc. 548 ft. over E. slope.

49.90
 61.00
 67.70
 78.40
 79.96

Wash, 15 lks. wide, 2 ft. deep, course SE.; continue asc.
 Wash, 15 lks. wide, 2 ft. deep, course SE.; continue asc.
 Wash, 20 lks. wide, 2 ft. deep, course SE.; continue asc.
 Spur, slopes SE.; desc. 36 ft. over W. slope.
 The cor. of secs. 25, 26, 35, and 36.

Land, mountainous.
 Soil, rocky, 3rd rate.
 Timber, none.
 Undergrowth, greasewood, cacti, sage brush, ocotilla,
 mesal, and palo verde.

N.0°1'W., bet. secs. 25 and 26.
 Over rolling mountains, through scattering undergrowth.
 Asc. 179 ft. over precipitous S. slope.

2.75
 8.93
 18.91
 25.89
 28.07
 31.27
 36.93
 40.00

Top of cliff, brs NW. and SE.; desc. 81 ft. over N. slope.
 Spur, slopes SE.; asc. 46 ft. over S. slope.
 Spur, slopes N.; desc. 158 ft. over N. slope.
 Wash, 15 lks. wide, 2 ft. deep, course SW.; then over
 level land.
 Cliff, brs NW. and SE.; desc. 91 ft. over N. slope.
 Wash, 15 lks. wide, 2 ft. deep, course SW.; asc. 41 ft.
 over S. slope.
 Spur, slopes NW.; desc. 24 ft. over N. slope.
 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in
 the ground to bed rock, deposit a stone marked with a
 cross (+) at base of post, and raise a mound of stone
 around post, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 S26 | S25
 1925

Desc. 86 ft. over N. slope.
 Spur, slopes SE.; desc. 03 ft. over N. slope.
 Spur, slopes SE.; asc. 11 ft. over S. slope.
 Spur, slopes SE.; desc. 558 ft. over N. slope.
 Buckhorn wash, 150 lks. wide, 1 ft. deep, with small
 stream of water, course SE.; asc. 38 ft. over S. slope.
 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in
 the ground to bed rock, deposit a stone marked with
 a cross (+) at base of post, and raise a mound of stone
 3 ft. base, 16 ins. high, around post, for cor. of secs.
 23, 24, 25, and 26, marked on brass cap

44.39
 49.30
 50.48
 74.90
 80.00

Chains.

T8N	R2W
S23	S24
S26	S25

1925

Land, mountainous.

Soil, rocky and sandy, 3rd rate.

Timber, none.

Undergrowth, palo verde, greasewood, cacti, sage brush, mesal and ocotilla.

- N.89°49'E., on random line bet. secs. 24 and 25.
40.00 Set temp. $\frac{1}{4}$ sec. cor.
79.80 Intersect the E. bdy. of the Tp., 12 lks. N. of the cor. of secs. 23, 24, 25, and 26, which is a cross (+) on rock, 10x6x1 ft. above ground, marked with 2 grooves on S. and 4 grooves N. of cross, and witnessed by mound of stone W. of cor.
- Thence
S.89°54'W., on true line bet. secs. 24 and 25.
Over mountainous land, through heavy undergrowth.
.05 Wash, 20 lks. wide, 2 ft. deep, course SE.; asc. 422 ft. over E. slope to ridge.
11.30 Rocky spur, slopes N.; continue asc.
23.60 Ridge, brs N. and SE.; asc. 107 ft. over E. slope.
34.34 Top of spur, slopes SE.; desc. 24 ft. over W. slope.
39.90 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 3 ft. base, 20 ins. high, for $\frac{1}{4}$ sec. cor., marked on brass cap
- | |
|-------------------|
| $\frac{1}{4}$ S24 |
| S25 |
- 1925
- The $\frac{1}{4}$ sec. cor. falls on top of ridge, brs NW. and SE.
Desc. 268 ft. over W. slope.
46.80 Wash, course SE.
51.00 Telephone line, brs N.66°W. and S.66°E.
58.08 Wash, 15 lks. wide, 1 ft. deep, course SE.; asc. 148 ft. over E. slope.
75.60 Top of cliff, brs NW. and SE.; desc. 257 ft. over W. slope.
79.80 The cor. of secs. 23, 24, 25, and 26.

Land, mountainous.

Soil, sandy and rocky, 3rd rate.

Timber, none.

Undergrowth, greasewood, cacti, sage brush, and ocotilla.

- N.9°1'W., bet. secs. 23 and 24.
Over rolling mountains, through scattering undergrowth.
6.20 Wash, 150 lks. wide, 1 ft. deep, course SW.; asc. 57 ft. over S. slope.
14.55 Telephone line, brs N.66°W. and S.66°E.; desc. 23 ft. over N. slope.
15.85 Wash, course E., 150 lks. wide, 1 ft. deep; asc. 455 ft. over S. slope.
27.11 Top of ridge, brs E. and W.; desc. 405 ft. over N. slope.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 3 ft. base, 20 ins. high, for $\frac{1}{4}$ sec. cor., marked on brass cap

Chains.

1/4
S23 | S24
1925

- 50.75 Desc. 98 ft. over N. slope.
Wash, 25 lks. wide, 2 ft. deep, course SE.
Asc. 62 ft. over S. slope.
- 51.84 Ridge, brs E. and W.
- 58.62 Ridge, brs W. and SE.; desc. 127 ft. over N. slope.
- 69.26 Castle Creek, with stream of water 10 lks. wide, 6 ins. deep, course SE.; asc. 91 ft. over S. slope.
- 75.54 Spur, slopes S.; then desc. 42 ft. over N. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 13, 14, 23, and 24, marked on brass cap

T8N R2W
S14 | S13
S23 | S24

1925

Land, mountainous.
Soil, gravelly and sandy, 3rd rate.
Timber, none.
Undergrowth, greasewood, cacti, sage brush, and ocotilla.

- 40.00 N. 89° 54' E., on random line bet. secs. 13 and 24.
Set temp. 1/4 sec. cor.
- 80.04 Intersect the E. bdy. of the Tp., 5 lks. N. of the true point for cor. of secs. 13 and 24, which is attested by Witness cor., N. 0° 3' E., 80 lks. dist., which is an iron post, 3 ins. diam., firmly set, properly marked for secs. 13 and 24 on the brass cap as follows:

T8N
R2W R1W
S13 |
S24 |
W C
1916

- 9.15 From sec. cor point,
S. 89° 56' W., on true line, bet. secs. 13 and 24.
Over rolling mountains, through scattering undergrowth.
Asc. 120 ft. over E. slope.
- 13.30 Ridge, brs NW. and SE.; desc. 116 ft. over S. slope.
- 14.30 Wash, 10 lks. wide, 2 ft. deep, course S.
- 14.30 Wash, 15 lks. wide, 2 ft. deep, course S.; asc. 63 ft. over E. slope.
- 19.40 Spur, slopes E.; desc 57 ft. over W. slope.
- 28.10 Wash, course S.; then over level ground.
- 40.02 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4 S13
S24
1925

- 46.55 Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.
Asc. 63 ft. over E. slope.
- 50.25 Ridge, brs NW. and SE.; desc. 20 ft. over W. slope.
- 52.55 Draw, course NW.; then over level land.
- 56.60 Ridge, brs NW. and SE.; desc. 48 ft. over W. slope.
- 64.00 Wash, course S.; asc. 46 ft. over E. slope.
Top of ridge, brs E. and W.; desc. 253 ft. over rocky W. slope.

Chains.

- 74.20 Wash, 100 lks. wide, 2 ft. deep, course S.; asc. 56 ft. a
over E. slope.
76.55 Spur, slopes SE.; desc. 16 ft. over W. slope.
80.04 The cor. of secs. 13,14,23, and 24.

Land, mountainous.
Soil, sandy and rocky, 3rd rate.
Timber, none.
Undergrowth, greasewood, cacti, sage brush, ocotilla,
and mesal.

- N.0°1'W., bet. secs. 13 and 14.
Over rolling mountains, through scattering undergrowth.
9.20 Wash, 30 lks. wide, 2 ft. deep, course SE.; asc. 38 ft.
over S. slope.
13.04 Top of spur, slopes SE.; desc. 22 ft. over N. slope.
15.74 Wash, 25 lks. wide, 2 ft. deep, course SE.; asc. 30 ft.
over S. slope.
19.36 Spur, slopes SE.; desc. 15 ft. over N. slope.
25.96 Wash, 18 lks. wide, 2 ft. deep, course SE.; asc. 21 ft.
over S. slope.
29.34 Wash, course SW.; asc. 62 ft. over S. slope.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

 $\frac{1}{4}$

S14 | S13

1925

- Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
Desc. 30 ft. over N. slope.
41.00 Wash, 25 lks. wide, 2 ft. deep, course SW.; asc. slightly
over S. slope.
46.49 Spur, slopes NW.; desc. 20 ft. over N. slope.
49.89 Wash, 20 lks. wide, 2 ft. deep, course SW.; asc. 46 ft.
over S. slope.
62.95 Spur, slopes W.; desc. 10 ft. over N. slope.
64.85 Wash, 5 lks. wide, 1 ft. deep, course SW.
66.35 Wash, 10 lks. wide, 1 ft. deep, course SW.; asc. slightly
70.04 Spur, slopes SW.; desc. 35 ft. over N. slope.
75.14 Wash, course SW.; asc. 51 ft. over S. slope.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in
the ground to bed rock, deposit a stone marked with a
cross (+) at base of post, and raise a mound of stone
around post, 3 ft. base, 26 ins. high, for cor. of secs.
11,12,13, and 14., marked on brass cap

T8N R2W

S11 | S12

S14 | S13

1925

Land, rolling mountains.
Soil, sandy and rocky, 3rd rate.
Timber, none.
Undergrowth, greasewood, cacti, ocotilla, palo verde, and
sage brush.

- N.89°56'E., on random line bet. secs. 12 and 13.
40.00 Set temp. $\frac{1}{4}$ sec. cor.
80.00 Intersect the E. bdy. of the Tp., 23 lks. S. of the cor.
of secs. 12 and 13, which is an iron post, 3 ins. diam.,

Survey of the Subdivision of T8N, R2W.

Chains.

firmly set, marked on brass cap

T8N
R2W R1W
S12

S13

1916 and witnessed by a mound of stone W. of cor.

Thence

S.89°46'W., on true line bet. secs. 12 and 13. Over rough mountains, through scattering undergrowth. Desc. 16 ft. over SW. slope.

2.30 Draw, course S.10°E.; asc. 215 ft. over E. slope.
19.00 Ridge, brs N. and S.10°E.; desc. 277 ft. over SW. slope.
37.30 Slope changes to NW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., on cross (+) on surface rock, and raise a mound of stone around post, 6 ft. base, 3 ft. high, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S12

S13
1925

42.40 Desc. 355 ft. over NW. slope.
Gulch, course N.20°W.; continue desc.
46.90 Cliff, 60 ft. high, facing SW.; continue desc.
58.50 Walker gulch, 80 lks. wide, 30 ft. deep, dry, course S. Asc. 176 ft. over SE. slope.
74.10 Spur, slopes SE.; desc. 89 ft. over SW. slope.
80.00 The cor. of secs. 11,12,13, and 14.

Land, rough mountains.
Soil, rocky, 4th rate.
Timber, scattered cottonwood along Walker gulch.
Undergrowth, palo verde, buck brush, ocotilla, and cacti.

N.0°1'W., bet. secs. 11 and 12.
Over mountainous land, through heavy undergrowth. Asc. 42 ft. over SW. slope.

6.10 Spur, slopes W.; desc. 65 ft. over N. slope.
12.00 Draw, course W.; asc. 466 ft. over S. slope.
26.20 Top of peak, slopes E.; desc. 40 ft. over NE. slope.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground, to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 3 ft. base, 20 ins. high, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S11 | S12
1925

49.00 Desc. 39 ft. over NE. slope.
Head of draw, course SE.; asc. 229 ft. over S. slope.
59.30 Top of W. slope of peak; desc. 301 ft. over NW. slope.
74.50 Slope changes to NE.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 3 ft. base, 1 $\frac{1}{2}$ ft. high, for cor. of secs. 1,2,11, and 12, marked on brass cap

Chains.

T8N R2W	
S 2	S 1
S11	S12

1925

Land, mountainous.
Soil, rocky, 4th rate.
Timber, none.
Undergrowth, palo verde, buck brush, cacti, and mesquite.

40.00 N.89°46'E., on random line bet. secs. 1 and 12.
Set temp. $\frac{1}{4}$ sec. cor.
80.04 Intersect the E. bdy. of the Tp., at the true point for
cor. of secs. 1 and 12. From this point the witness cor. to
cor. of secs. 1 and 12 brs South, 1.80 chs. dist., and
is an iron post, 3 ins. diam., firmly set, marked on
brass cap

WC	
T8N	
R2W	R1W
S 1	
S12	

1916 and witnessed by a
mound of stone W. of cor.

From true point for cor.,

.60 S.89°46'W., on true line bet. secs. 1 and 12.
40.02 Over mountainous land, through heavy undergrowth.
Desc. 514 ft. over SW. slope to $\frac{1}{4}$ sec. cor.
Gulch, course S.60°W.; continue desc.
Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$	S 1
	S 12
	1925

43.55 Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.
48.55 Desc. 70 ft. over SW. slope.
62.65 Draw, course NW.; asc. 74 ft. over NE. slope.
65.15 Spur, slopes N.; desc. 260 ft. over NW. slope.
69.35 Same draw, course S.70°W.; asc. 58 ft. over SE. slope.
80.04 Point of spur, slopes S.; desc. 106 ft. over SW. slope.
Walker Gulch, 80 lks. wide, course S.10°E.; asc. 151 ft.
over NE. slope.
The cor. of secs. 1, 2, 11, and 12.


Land, mountainous
Soil, sandy and rocky, 3rd and 4th rate.
Timber, none.
Undergrowth, oak, mesquite, and cacti.

3.20 N.0°1'W., on true line bet. secs. 1 and 2.
4.90 Over rolling mountains, through scattering undergrowth.
8.00 Desc. 128 ft. over N. slope.
27.50 Draw, course E.; asc. 69 ft. over SE. slope.
34.90 Spur, slopes E.; desc. 51 ft. over NE. slope.
40.00 Draw, course E.; asc. 252 ft. over SE. slope.
Spur, slopes SE.; desc. 154 ft. over NE. slope.
Draw, course E.; asc. 148 ft. over SE. slope.
Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in
the ground to bed rock, deposit a stone marked with a
cross (+) at base of post, and raise a mound of stone
around post, 4 ft. base, 2 $\frac{1}{2}$ ft. high, for $\frac{1}{4}$ sec. cor.,


Survey of the Subdivision of T8N, R2W.

Chains.

marked on brass cap



- Asc. 18 ft. over SE. slope.
- 40.90 Spur, slopes E.; desc. 132 ft. over NE. slope.
- 46.60 Walker gulch, 100 lks. wide, course S.20°E.; asc. 54 ft. over SW. slope.
- 49.20 Point of spur, slopes SW.; desc. 25 ft. over NW. slope.
- 52.70 Walker gulch, 100 lks. wide, course S.20°W.; asc. 198 ft. over SE. slope.
- 75.20 Intersect the Second Standard Parallel North, at a point 7.29 chs. East of the standard cor. of secs. 35 and 36, T9N, R2W., which is an iron post, 2 ins. in diam., firmly set, properly marked on brass cap and witnessed by a mound of stone N. of cor. At point of intersection, set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 4 ft. base, 18 ins. high, for closing cor. of secs. 1 and 2, marked on brass cap

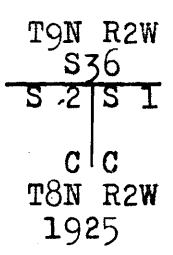


Land, rolling mountains.
 Soil, sandy and rocky, 3rd rate.
 Timber, none.
 Undergrowth, oak, palo verde, cacti, and mesquite.

From the cor. of secs. 2, 3, 34, and 35 on the S. bdy. of the Tp., described in book "B"

N.0°1'W., bet. secs. 34 and 35.
 Over rolling mountains, through scattering undergrowth.
 Asc. 42 ft. over S. slope.

- .50 Spur, slopes SE.; desc. 419 ft. over N. slope.
- 3.13 Draw, course SE.; asc. 37 ft. over S. slope.
- 18.89 Spur, slopes E.; desc. 164 ft. over N. slope.
- 25.85 Wash, course SE.; asc. 353 ft. over S. slope.
- 37.11 Spur, slopes SE.; desc. slightly.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone, 3 ft. base, 18 ins. high, around post, for $\frac{1}{4}$ sec. cor., marked on brass cap



- 43.34 Desc. 32 ft. over N. slope.
- 56.05 Wash, course SE.; asc. 286 ft. over S. slope.
- Top of ridge, brs NW. and SE.; desc. 382 ft. over N. slope.
- 65.71 Wash, course SE.; asc. 169 ft. over precipitous S. slope.

Chains.

72.48 Spur, slopes SE.
 75.18 Top of cliff, brs NW. and SE.; desc. 259 ft. over N. slope.
 79.00 Wash, course SE.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 3 ft. base, 2 ft. high, for cor. of secs. 26, 27, 34, and 35, marked on brass cap

T8N	R2W
S27	S26
S34	S35

1925

Land, mountainous.
 Soil, sandy and rocky, 4th rate.
 Timber, none.
 Undergrowth, greasewood, cacti, sage brush, ocotilla, and palo verde.

40.00 East, on random line bet. secs. 26 and 35.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.20 Intersect the N. and S. line, 2 lks. N. of the cor. of secs. 25, 26, 35, and 36.

Thence

N. $89^{\circ}59'$ W., on true line bet. secs. 26 and 35.
 Over rolling mountains, through scattering undergrowth.
 Desc. 346 ft. over W. slope.
 20.56 Wash, 20 lks. wide, 2 ft. deep, course SE.
 25.45 Wash, 20 lks. wide, 2 ft. deep, course SE.; asc. 288 ft. over E. slope.
 35.11 Ridge, brs NW. and SE.; desc. 197 ft. over W. slope.
 40.10 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone 3 ft. base, 12 ins. high, around post, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S26
S35
1925

40.50 Wash, 26 lks. wide, 2 ft. deep, course SE.; asc. 318 ft. over E. slope.
 53.21 Top of rocky ridge, brs NW. and SE.; desc. 226 ft. over W. slope.
 57.10 Wash, 10 lks. wide, 2 ft. deep, course NE.; continue desc.
 70.08 Wash, 30 lks. wide, 2 ft. deep, course NW.; asc. 88 ft. over E. slope.
 79.00 Wash, 25 lks. wide, 2 ft. deep, course NE.
 80.20 The cor. of secs. 26, 27, 34, and 35.

Land, mountainous.
 Soil, sandy and rocky, 3rd rate.
 Timber, none.
 Undergrowth, mahogany, palo verde, greasewood, cacti, ocotilla, sage brush and buck brush.


N. $0^{\circ}1'$ W., bet. secs. 26 and 27.
 Over rolling mountains, through scattering undergrowth.
 Desc. 79 ft. over N. slope.
 4.78 Wash, 25 lks. wide, 1 ft. deep, course SE.
 9.18 Wash, 25 lks. wide, 2 ft. deep, course SE.; asc. 432 ft. over S. slope.

Survey of the Subdivision of T8N,R2W.

Chains.

35.60
39.97
40.00


Spur, slopes SE.; continue asc.
Ridge, brs NW. and SE.
Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 3 ft. base, 24 ins. high, for $\frac{1}{4}$ sec. cor., marked on brass cap



1925

71.89
73.84
79.80

Desc. 708 ft. over broken N. slope.
Wash, 20 lks. wide, 2 ft. deep, course NE.; asc. 34 ft. over SE. slope.
Spur, slopes NE.; desc. 88 ft. over NW. slope to
Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for witness cor. to cor. of secs. 22, 23, 26, and 27, marked on brass cap



1925

80.00

Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. True point for cor. of secs. 22, 23, 26, and 27 falls in wash, course NE. (10 lks. wide, 2 ft. deep)

Land, mountainous.
Soil, sandy and rocky, 3rd rate.
Timber, none.
Undergrowth, greasewood, cacti, sage brush, and ocotilla.


40.00
80.24

From true point for cor.
S. $89^{\circ}59'E.$, on random line bet. secs. 23 and 26.
Set temp. $\frac{1}{4}$ sec. cor.
Intersect the N. and S. line, 9 lks. S. of the cor. of secs. 23, 24, 25, and 26.

Thence
S. $89^{\circ}57'W.$, on true line bet. secs. 23 and 26.
Over rolling mountains, through scattering undergrowth.
Desc. slightly over W. slope.

1.02
7.32
9.32
14.17
29.20
31.10
40.12

Buckhorn wash, 150 lks. wide, 2 ft. deep, course S., with very small stream of running water.
Asc. 258 ft. over E. slope.
Spur, slopes S.; continue asc.
Spur, slopes S.; continue asc.
Spur, slopes NW.; desc. 114 ft. over W. slope.
Spur, slopes NE.; continue desc.
Wash, 25 lks. wide, 2 ft. deep, course NW.; asc. 86 ft. over E. slope.
Set an iron post, 3 ft. long, 1 in. diam., on cross (+) on bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone, 5 ft. base, 3 ft. high, around post, for $\frac{1}{4}$ sec. cor., marked on brass cap



49.05

Asc. 175 ft. over E. slope.
Spur, slopes NW.; desc. 187 ft. over W. slope.


Chains.

- 56.75 Wash, 20 lks. wide, 3 ft. deep, course NE.; continue desc.
- 64.86 Wash, 30 lks. wide, 2 ft. deep, course NE.; desc. 15 ft.
- 67.60 Wash, 30 lks. wide, 2 ft. deep, course NE. Asc. 89 ft. over E. slope
- 73.30 Wash, course N. Ascend over E. slope
- 76.50 Spur, slopes NW. From SW. Desc. to
- 80.24 The true point for cor. of secs. 22, 23, 26, and 27.

Land, mountainous.
 Soil, rocky and sandy, 3rd rate.
 Timber, none.
 Undergrowth, greasewood, cacti, buck brush, sage brush, and ocotilla


From the true point for cor. of secs. 22, 23, 26, and 27. N.0°1'W., bet. secs. 22 and 23. Over rolling mountains, through scattering undergrowth. Desc. 57 ft. over N. slope.

- 6.17 Wash, 10 lks. wide, 2 ft. deep, course NW.; asc. 25 ft. over S. slope.
- 8.85 Spur, slopes NW.; continue asc.
- 11.25 Spur, slopes NW.; desc. 91 ft. over N. slope.
- 15.78 Wash, 200 lks. wide, 2 ft. deep, course SE.; asc. 112 ft. over S. slope.
- 19.69 Spur, slopes SE.; desc. 74 ft. over N. slope.
- 26.88 Wash, 30 lks. wide, 2 ft. deep, course SE.; asc. 143 ft. over S. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone, 3 ft. base, 2 ft. high, around post, for $\frac{1}{4}$ sec. cor., marked on brass cap



1925

- 47.01 Desc. 89 ft. over N. slope. Wash, 15 lks. wide, 1 ft. deep, course SE.; asc. 29 ft. over S. slope.
- 54.63 Spur, slopes NE.; desc. 126 ft. over N. slope.
- 58.43 Telephone line, brs N.57°W. and S.57°E.
- 63.36 Wash, 25 lks. wide, 2 ft. deep, course SE.; asc. 135 ft. over S. slope.
- 72.16 Spur, slopes E.; desc. 119 ft. over N. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 3 ft. base, 2 ft. high, for cor. of secs. 14, 15, 22, and 23, marked on brass cap



1925

Land, mountainous.
 Soil, rocky and sandy, 3rd rate.
 Timber, none.
 Undergrowth, palo verde, greasewood, cacti, sage brush, and ocotilla.

- 40.00 N.89°57'E., on random line bet. secs. 14 and 23. Set temp. $\frac{1}{4}$ sec. cor.

Survey of the Subdivision of T8N, R2W.

Chains.

- 80.20 Intersect the cor. of secs. 13, 14, 23, and 24.
Thence
S. 89° 57' W., on true line bet. secs. 14 and 23.
Over rolling mountains, through scattering undergrowth.
Asc. 74 ft. over E. slope.
- 3.05 Spur, slopes SE.; desc. 46 ft. over W. slope.
- 6.48 Wash, 20 lks. wide, 2 ft. deep, course S.; desc. 77 ft.
over W. slope.
- 21.65 Castle creek, course SE., with stream of water, 15 lks.
wide, 4 ins. deep.; asc. 290 ft. over E. slope.
- 40.10 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S14
S23
1925

- 40.20 Raise mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
- Spur, slopes N.; desc. 140 ft. over W. slope.
- 49.57 Spur, slopes NE.; continue desc.
- 53.27 Wash, 10 lks. wide, course NE.; asc. 102 ft. over E.
slope.
- 58.62 Spur, slopes NE.; desc. 34 ft. over W. slope.
- 64.20 Wash, 30 lks. wide, 2 ft. deep, course NE.; continue
desc.
- 68.59 Wash, 25 lks. wide, 2 ft. deep, course NE.; asc. 96
ft. over E. slope.
- 73.40 Spur, slopes NE.; desc. 96 ft. over W. slope.
- 77.30 Wash, course N.
- 80.20 The cor. of secs. 14, 15, 22, and 23.

Land, mountainous.
Soil, sandy and rocky, 3rd rate.
Timber, none.
Undergrowth, greasewood, cacti, sage brush, and ocotilla

- N. 0° 1' W., bet. secs. 14 and 15.
Over rolling mountains, through scattering undergrowth.
Desc. 29 ft. over N. slope.
- 1.78 Wash, 25 lks. wide, 2 ft. deep, course NE.
- 9.98 Spur, slopes NE.; desc. 52 ft. over N. slope.
- 14.38 Wash, 30 lks. wide, 2 ft. deep, course NE.; asc. 56 ft.
over S. slope.
- 18.22 Top of spur, slopes SE.; desc. 101 ft. over N. slope.
- 25.75 Castle creek, course SE., with stream of water 10 lks.
wide, 4 ins. deep.
Asc. 59 ft. over S. slope.
- 32.44 Spur, slopes SW.; continue asc.
- 35.34 Wash, 20 lks. wide, 2 ft. deep, course SW.; asc. 57 ft.
over S. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in
the ground to bed rock, deposit a stone marked with a
cross (+) at base of post, and raise a mound of stone
around post, 3 ft. base, 18 ins. high, for $\frac{1}{4}$ sec. cor.,
marked on brass cap

$\frac{1}{4}$
S15 | S14
1925

- 50.90 Asc. 114 ft. over S. slope.
- Spur, slopes W.; continue asc.
- 57.69 Spur, slopes SE.; desc. 63 ft. over N. slope.
- 67.81 Wash, 30 lks. wide, 2 ft. deep, course NE.; asc. 23 ft.
over S. slope.
- 70.87 Spur, slopes NE.; desc. 70 ft. over N. slope.

Chains.

77.05 Wash, 25 lks. wide, 2 ft. deep, course SE.; asc. 18 ft. over S. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 5 ft. base, 21 ins. high, for cor. of secs. 10,11,14, and 15., marked on brass cap

T8N	R2W
S10	S11
S15	S14

1925

Land, mountainous.

Soil, rocky, 3rd rate.

Timber, none.

Undergrowth, greasewood, cacti, sage brush, and ocotilla.

40.00 N.89°57'E., on random line bet. secs. 11 and 14.
Set temp. $\frac{1}{4}$ sec. cor.

80.06 Intersect the N. and S. line, 2 lks. S. of the cor. of secs. 11,12,13, and 14.

Thence

S.89°56'W., on true line bet. secs. 11 and 14.

Over rolling mountainous land, through heavy undergrowth. Desc. 112 ft. over W. slope.

8.40 Draw, course S.; asc. 95 ft. over SE. slope.

18.20 Spur, slopes S.; desc. 63 ft. over SW. slope.

30.50 Wash, 60 lks. wide, course S.; asc. 191 ft. over SE. slope.

40.03 Set an iron post, 3 ft. long, 1 in. diam., on cross (+) on surface rock, and raise a mound of stone around post, 6 ft. base, 3 ft. high, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S11
S14
1925

48.40 Asc. 139 ft. over SE. slope.

Ridge, brs N. and S.; desc. 430 ft. over W. slope.

73.50 Banty creek, course S., with water in holes.

Asc. 350 ft. over precipitous E. slope.

75.40 Spur, slopes S.; desc. 175 ft. over W. slope.

80.06 The cor. of secs. 10,11,14, and 15.

Land, rolling mountains.

Soil, sandy and rocky, 3rd rate.

Timber, none.

Undergrowth, palo verde, mesquite, oak, and cacti.

N.0°1'W., bet. secs. 10 and 11.

Over rolling mountains, through heavy undergrowth.

Asc. 77 ft. over SW. slope.

8.60 Spur, slopes S.20°E.; desc. 105 ft. over NE. slope.

31.20 Gulch, course SE.; asc. 40 ft. over SE. slope.

35.00 Point of spur, slopes SE.; desc. 25 ft. over NE. slope.

38.80 Draw, course SE.; asc. 25 ft. over S. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 4 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone, 5 ft. base, 32 ins. high, around post, for $\frac{1}{4}$ sec. cor., marked on brass cap

Survey of the Subdivision of T8N, R2W.

Chains.

$\frac{1}{4}$
 S10 | S11

1925

- Asc. 77 ft. over S. slope.
- 52.30 Spur, slopes S.70°E.; desc. 111 ft. over NE. slope.
- 57.00 Rock cabin, brs E. about 6.00 chs. dist.
- 58.90 Draw, course S.70°E.; asc. 55 ft. over S. slope.
- 62.00 Spur, slopes SE.; desc. 31 ft. over NE. slope.
- 72.60 Draw, course S.20°E.; asc. 107 ft. over S. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground, to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone 5 ft. base, 2½ ft. high, around post, for cor. of secs. 2, 3, 10, and 11, marked on brass cap

T8N R2W
 S 3 | S 2
 S10 | S11

1925

Corner falls on spur, sloping SE.

Land, rolling mountains.
 Soil, sandy and rocky, 4th rate.
 Timber, none.
 Undergrowth, palo verde, buck brush, oak brush and ocotilla.

- 40.00 N.89°56'E. on random line bet. secs. 2 and 11.
- 80.08 Set temp. ¼ sec. cor.
 Intersect the N. and S. line, 12 lks. N. of the cor. of secs. 1, 2, 11, and 12.

Thence
 N.89°59'W., on true line bet. secs. 2 and 11.
 Over rolling mountains, through scattering and medium undergrowth.

- 6.10 Asc. 55 ft. over NE. slope.
- 40.04 Ridge, brs NW. and SE.; desc. 194 ft. over SW. slope.
 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone 3½ ft. base, 22 ins. high, around post, for ¼ sec. cor., marked on brass cap

$\frac{1}{4}$ S 2
 S11
 1925

- 43.10 Desc. 43 ft. over W. slope.
- 46.70 Draw, course S.20°W.; asc. 61 ft. over SE. slope.
- 71.10 Spur, slopes S.10°W.; desc. 155 ft. over SW. slope.
- 80.08 Banty creek, dry, 100 lks. wide, course S.; asc. 180 ft. over E. slope.
 The cor. of secs. 2, 3, 10, and 11.

Land, rolling mountains.
 Soil, sandy and rocky, 4th rate.
 Timber, cottonwood along Banty creek.
 Undergrowth, palo verde, oak, and cacti.

Chains.

N.0°1'W., bet. secs. 2 and 3.
 Over rolling mountains, through medium undergrowth.
 Desc. 70 ft. over NE. slope.
 9.70 Draw, course S.60°E.; asc. 82 ft. over S. slope.
 14.70 Spur, slopes SE.; desc. 101 ft. over NE. slope.
 24.30 Small creek, course S.60°E. (Water in creek, 3 lks. wide,
 3 ins. deep) Asc. 235 ft. over SE. slope.
 37.80 Spur, slopes SE.; desc. 14 ft. over NE. slope.
 40.00 True point for $\frac{1}{4}$ sec. cor. falls on steep rocky ledge,
 unsuitable for permanent cor.
 40.50 Set an iron post, 3 ft. long, 1 in. diam., 5 ins. in
 the ground to bed rock, deposit a stone marked with a
 cross (+) and raise a mound of stone around post,
 5 ft. base, 30 ins. high, for witness cor. to $\frac{1}{4}$ sec. cor.,
 marked on brass cap

$\frac{1}{4}$
 S 3 | S 2
 W C
 1925

Desc. 30 ft. over NE. slope.
 42.20 Small draw, course SE.; asc. 284 ft. over S. slope.
 45.00 Slope changes to broken SE.
 65.60 Spur, slopes E.; desc. 191 ft. over NE. slope.
 75.38 Intersect the Second Standard Parallel North, at a point,
 7.30 chs. East of the standard cor. for secs. 34 and 35,
 T9N,R2W, which is an iron post, 2 ins. diam., firmly
 set, properly marked on brass cap and witnessed by
 mound of stone N. of cor.
 At point of intersection, set an iron post, 3 ft. long,
 2 ins. diam., 18 ins. in the ground to bed rock, deposit
 a stone marked with a cross (+) at base of post, and
 raise a mound of stone around post, 3 ft. base, 1 $\frac{1}{2}$ ft.
 high, for closing cor. of secs. 2 and 3, marked on brass
 cap

T9N R2W
 S35
 S 3 | S 2
 C C
 T8N R2W
 1925

Land, rolling mountains,
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, palo verde, ocotilla, cacti, and mesquite.

From the cor. of secs. 3, 4, 33, and 34 on the S. bdy. of
 the Tp., described in book "B".

N.0°2'W., bet. secs. 33 and 34 .
 Over rough mountains, through scattering undergrowth.
 Asc. 108 ft. over S. slope.
 2.90 Spur, slopes SE.; desc. 142 ft. over NE. slope.
 8.60 Draw, course SE.; asc. 433 ft. over SE. slope.
 21.20 Ridge, brs NW. and SE.; desc. 198 ft. over NE. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in
 the ground to bed rock, deposit a stone marked with a
 cross (+) at base of post, and raise a mound of stone
 around post, 4 ft. base, 2 $\frac{1}{2}$ ft. high, for $\frac{1}{4}$ sec. cor.,
 marked on brass cap

$\frac{1}{4}$
 S33 | S34
 1925

Survey of the Subdivision of T8N,R2W.

Chains.

59.10 Desc. 432 ft. over broken N. slope.
 61.00 Draw, course NW.; asc. 23 ft. over SW. slope.
 80.00 Spur, slopes W.; desc. 203 ft. over broken NW. slope.
 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in
 the ground, for cor. of secs. 27, 28, 33, and 34, marked
 on brass cap

T8N R2W
 S28 | S27
 S33 | S34

1925

Land, rough mountains.
 Soils, sandy and rocky, 3rd rate.
 Timber, none.
 Undergrowth, oak brush, sage brush, laurel, mesquite,
 and cacti.

40.00 East, on random line bet. secs. 27 and 34.
 80.06 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect the N. and S. line, 4 lks. N. of the cor. of
 secs. 26, 27, 34, and 35.

Thence
 N. 89° 58' W., on true line bet. secs. 27 and 34.
 Over rough mountains, through scattering undergrowth.
 Desc. 407 ft. over steep NE. slope.
 22.36 Rocky ledge, projects N.; desc. 88 ft. over NW. slope.
 25.15 Gulch, course N.; asc. 222 ft. over precipitous NE. slope.
 35.00 Top of rocky ledge on spur, slopes NW.; desc. 290 ft.
 over precipitous W. slope.
 40.03 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in
 the ground to bed rock, deposit a stone marked with a
 cross (+) at base of post, and raise a mound of stone,
 3 ft. base, 1 $\frac{1}{2}$ ft. high, around post, for $\frac{1}{4}$ sec. cor.,
 marked on brass cap

$\frac{1}{4}$ S27
 S34
 1925

48.16 Desc. 115 ft. over W. slope.
 58.50 Gulch, course N. 10° W.; asc. 37 ft. over NE. slope.
 80.06 Ridge, brs N. and S.; desc. 240 ft. over NW. slope.
 The cor. of secs. 27, 28, 33, and 34.

Land, rough mountains,
 Soil, sandy and rocky, 3rd rate.
 Timber, none.
 Undergrowth, laurel, sage brush, oak brush, ocotilla,
 and mesquite.

N. 0° 2' W., bet. secs. 27 and 28.
 Over rough mountains, through scattering undergrowth.
 Desc. 39 ft. over NW. slope.
 2.40 Gulch, course N. 70° W.; asc. 222 ft. over SW. slope.
 20.60 Spur, slopes SW.; desc. 65 ft. over N. slope.
 23.80 Gulch, course W.; asc. 99 ft. over SW. slope.
 27.60 Spur, slopes SW.; desc. 49 ft. over NW. slope.
 29.80 Draw, course SW.; asc. 173 ft. over S. slope.
 36.60 Ridge, brs E. and W.; desc. 134 ft. over N. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

Chains.

 $\frac{1}{4}$

S28 | S27

1925

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.
 Desc. 525 ft. over steep N. slope.
 58.40 Enter Buckhorn wash, dry, course N.70°E.
 61.70 Road, brs N.70°E. to Buckhorn Mine and S.70°W. to Wick-
 enburg.
 63.20 Leave Buckhorn wash; asc. 143 ft. over broken SE. slope.
 78.30 Spur, slopes SE.; desc. 32 ft. over NE. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in
 the ground, for cor. of secs. 21, 22, 27, and 28, marked
 on brass cap

T8N R2W

S21 | S22

S28 | S27

1925

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.
 Land, rough mountains,
 Soil, sandy, gravelly, and rocky, 3rd rate.
 Timber, none.
 Undergrowth, mesquite, laurel, sage brush, and buck brush.

40.00 S.89°58'E., on random line bet. secs. 22 and 27.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.20 Intersect the N. and S. line, 9 lks. N. of the true point
 for cor. of secs. 22, 23, 26, and 27.

Thence from true point for cor.

N.89°54'W., on true line bet. secs. 22 and 27.
 Overrolling mountains, through scattering and heavy
 undergrowth.
 8.20 Asc. 109 ft. over E. slope.
 14.20 Spur, slopes NE.; desc. 147 ft. over NW. slope.
 15.20 Draw, course N.; asc. 201 ft. over E. slope.
 16.20 Point of spur, slopes E.; continue asc.
 26.00 Draw, course NE.; continue asc.
 35.60 Spur, slopes NE.; then along N. slope.
 40.10 Asc. 124 ft. over NW. slope.
 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

 $\frac{1}{4}$ S22

S27

1925

54.00 Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.
 Desc. 171 ft. over steep NW. slope.
 62.50 Enter Buckhorn wash, course N.70°E.
 Leave Buckhorn wash, course NE. (Dry)
 Also mouth of wash from the West. Follow up wash.
 72.80 Leave same wash, which comes from NW.
 Asc. 130 ft. over NE. slope.
 80.20 The cor. of secs. 21, 22, 27, and 28.

Land, rough mountains.


Soil, sandy and rocky, 3rd rate.

Timber, none.


Undergrowth, palo verde, sage brush, buck brush, oak
 brush.

Chains.

N.0°2'W., bet. secs. 21 and 22.
 Over rough mountains, through heavy undergrowth.
 Desc. 52 ft. over NW. slope.
 10.90 Wash, 70 lks. wide, course SE. asc. 356 ft. over S.
 slope to 1/4 sec. cor.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in
 the ground to bed rock, deposit a stone marked with a
 cross (+) at base of post, and raise a mound of stone
 around post, 3 ft. base, 1 1/2 ft. high, for 1/4 sec. cor.
 marked on brass cap



53.80 Asc. 535 ft. over steep S. slope.
 Top of Evans Butte, brs E. and W.; desc. 161 ft. over NE.
 slope.
 61.20 Head of draw, course E.; asc. 167 ft. over SE. slope.
 67.60 Top of peak, brs E. and W.; desc. 527 ft. over steep N.
 slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in
 the ground, for cor. of secs. 15, 16, 21, and 22, marked
 on brass cap




Raise mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rough mountains.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, buck brush, palo verde, ocotilla, and cacti.

40.00 S.89°54'E., on random line bet. secs. 15 and 22.
 Set temp. 1/4 sec. cor.
 80.32 Intersect the N. and S. line, 2 lks. N. of the cor. of
 secs. 14, 15, 22, and 23.

Thence
 N.89°53'W., on true line bet. secs. 15 and 22.
 Over mountainous land, through heavy undergrowth.
 Asc. 134 ft. over NE. slope.

20.32 Spur, slopes S.; desc. 63 ft. over SW. slope.
 29.62 Gulch, course SE.; asc. 115 ft. over SE. slope.
 35.20 Telephone line, brs NW. and SE.
 40.16 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in
 the ground to bed rock, deposit a stone marked with a
 cross (+) at base of post, and raise a mound of stone
 around post, 3 ft. base, 1 1/2 ft. high, for 1/4 sec. cor.,
 marked on brass cap




41.10 Asc. 10 ft. over SE. slope.
 Spur, slopes NE.; desc. 81 ft. over W. slope.
 47.92 Draw, course N.10°E.; asc. 413 ft. over NE. slope.
 70.00 Slope changes to N.
 80.32 The cor. of secs. 15, 16, 21, and 22.

BOOK 3713 Survey of the Subdivision of T8N,R2W.

Chains.


Land, mountainous.
Soil, sandy and rocky, 3rd and 4th rate.
Timber, none.
Undergrowth, palo verde, mesquite, buck brush, and sage brush.

- 2.00 N.0°2'W., bet. secs. 15 and 16.
Over rough mountains, through heavy undergrowth.
Desc. 93 ft. over steep N. slope.
- 11.00 Draw, course N.80°E.
Asc. 360 ft. over precipitous S. slope.
- 28.60 High rock ledge on spur, slopes E.; desc. 572 ft. over NE. slope.
- 38.60 Telephone line bts N.70°W. and S.70°E.
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for witness cor. to 1/4 sec. cor., marked on brass cap



1925

- 40.00 Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor. True point for 1/4 sec. cor. falls in wash, 80 lks. wide, course E.
Asc. 17 ft. over S. slope.
- 43.00 Spur, slopes E.; desc. 30 ft. over N. slope.
- 45.00 Draw, course E.; asc. 68 ft. over S. slope.
- 46.10 Spur, slopes NE.; desc. 75 ft. over N. slope.
- 50.70 Wash, 20 lks. wide, 2 ft. deep, course SE.; ; asc. slightly over S. slope.
- 55.00 Spur, slopes E.; desc. 40 ft. over N. slope.
- 57.50 Wash, 20 lks. wide, 2 ft. deep, course SE.; asc. 113 ft. over S. slope.
- 64.60 Spur, slopes NE.; desc. 74 ft. over N. slope.
- 71.00 Wash, 15 lks. wide, 2 ft. deep, course SE.; asc. slightly
- 72.00 Spur, slopes SE.; desc. 43 ft. over N. slope to cor.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to bed rock, deposit a stone marked with a cross (+) and raise a mound of stone around post, for cor. of secs. 9,10,15, and 16, marked on brass cap



1925

Land, mountainous.
Soil, sandy and rocky, 3rd rate.
Timber, none.
Undergrowth, palo verde, mesquite, buck brush and cacti.

- 40.00 S.89°53'E., on random line bet. secs. 10 and 15.
Set temp. 1/4 sec. cor.
- 80.34 Intersect the N. and S. line, 5 lks. N. of the cor. of secs. 10,11,14, and 15.

Thence
N.89°51'W., on true line bet. secs. 10 and 15.
Over rolling mountains, through scattering undergrowth.
Desc. slightly over W. slope.

- .84 Wash, course SE.; asc. 107 ft. over E. slope
- 7.80 Top of spur, slopes SE.; desc. 67 ft. over W. slope.

Chains.

- 13.92 Wash, 15 lks. wide, 2 ft. deep, course S.; asc. 74 ft. over E. slope.
- 19.30 Spur, slopes SE.; desc. 169 ft. over W. slope.
- 32.95 Wash, 50 lks. wide, 2 ft. deep, with small stream of running water, course S.
Asc. slightly over E. slope.
- 35.55 Spur, slopes SE.; desc. 96 ft. over W. slope.
- 40.17 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S10
S15
1925

- Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor. Desc. slightly over W. slope.
- 41.85 Castle Creek, 150 lks. wide, with small stream of running water in bottom, course SE.; asc. 130 ft. over E. slope.
- 56.20 Spur, slopes SE.; desc. 14 ft. over W. slope.
- 58.00 Thence over level land.
- 65.00 Desc. 50 ft. over W. slope.
- 66.70 Wash, 25 lks. wide, 2 ft. deep, course SE.; asc. 83 ft. over E. slope.
- 80.34 The cor. of secs. 9,10,15, and 16.

Land, mountainous.
Soil, sandy and rocky, 3rd rate.
Timber, none.
Undergrowth, sage brush, cacti, ocotilla, and greasewood.

- N.0°2'W., bet. secs. 9 and 10.
Over rolling mountains, through scattering brush.
Desc. 30 ft. over N. slope.
- 2.75 Wash, 15 lks. wide, 2 ft. deep, course SE.; asc. 21 ft. over S. slope.
- 6.27 Top of spur, slopes E.; desc. 34 ft. over N. slope.
- 13.24 Wash, 15 lks. wide, 2 ft. deep, course SE.; asc. 57 ft. over S. slope.
- 26.01 Top of spur, slopes SE.; desc. 164 ft. over N. slope.
- 34.58 Castle Creek, 1.00 ch. wide, with small stream of running water in bottom, course SE.; asc. 118 ft. over S. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 3 ft. base, 21 ins. high, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S 9 | S10
1925

- Asc. 92 ft. over S. slope.
- 54.93 Top of spur, slopes S.; thence over level land.
- 68.00 Desc. 25 ft. over N. slope.
- 70.13 Wash, 20 lks. wide, 2 ft. deep, course W.; asc. 25 ft. over S. slope.
- 74.10 Wash, 25 lks. wide, course W.; then asc. 49 ft. over S. slope.
- 75.85 Spur, slopes W.; desc. slightly over N. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 3 ft. base, 16 ins. high, for cor. of secs. 3,4,9, and 10, marked on brass cap

Chains.

T8N R2W
S 4 | S 3
S 9 | S 10

1925

Land, mountainous.
Soil, rocky and sandy, 3rd rate.
Timber, none.
Undergrowth, palo verde, greasewood, cacti, sage brush,
and ocotilla.

40.00 S.89°51'E., on random line bet. secs. 3 and 10.
Set temp. 1/4 sec. cor.
80.30 Intersect the cor. of secs. 2,3,10, and 11.

Thence
N.89°51'W., on true line bet. secs. 3 and 10.
Over mountainous land, through scattering undergrowth.
Asc. 395 ft. over SE. slope.

15.00 Head of draw, course S.10°E.; Continue ascent.
Slope changes to E.
26.10 Spur, slopes S.; desc. 193 ft. over W. slope.
35.00 Draw, course S.; asc. 77 ft. over SE. slope.
40.15 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in
the ground to bed rock, deposit a stone marked with a
cross (+) at base of post, and raise a mound of stone
around post, 3 ft. base, 16 ins. high, for 1/4 sec. cor.,
marked on brass cap

1/4 S 3
S 10
1925

45.10 Asc. 107 ft. over E. slope.
Spur, slopes SE.; desc. 107 ft. over W. slope.
52.80 Wash, 20 lks. wide, 2 ft. deep, course S.; asc. 29 ft.
over E. slope.
54.00 Desc. 75 ft. over W. slope.
60.79 Wash, course S.; asc. 63 ft. over E. slope.
62.80 Desc. 50 ft. over W. slope.
65.30 Ravine, course S.; asc. slightly.
68.20 Top of rocky spur, slopes S.; desc. 150 ft. over W. slope.
80.30 The cor. of secs. 3,4,9, and 10.

Land, mountainous.
Soil, sandy and rocky, 3rd rate.
Timber, none.
Undergrowth, palo verde, greasewood, cacti, sage brush,
and ocotilla.

25.38 N.9°2'W., bet. secs. 3 and 4.
Over rolling mountains, through scattering undergrowth.
Asc. 389 ft. over S. slope.
35.00 Rocky ridge, brs NW. and SE.; continue asc.
Thence over level land.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in
the ground to bed rock, deposit a stone marked with a
cross (+) at base of post, and raise a mound of stone
around post, 3 ft. base, 26 ins. high, for 1/4 sec. cor.,
marked on brass cap

1/4
S 4 | S 3
1925

Chains.


45.00 Desc. 96 ft. over N. slope.
Wash, 20 lks. wide, 2 ft. deep, course W.; asc. 176 ft. over S. slope.

72.66 Spur, slopes W.; desc. slightly over N. slope.

75.32 Intersect the Second Standard Parallel North, at a point 6.84 chs. East of the standard cor. for secs. 33 and 34, T9N, R2W., which is an iron post, 2 ins. diam., firmly set, properly marked on brass cap, and witnessed by mound of stone N. of cor.

At point of intersection, set an iron post, 3 ft. long, 2 ins. diam., on cross (+) on bed rock, and raise a mound of stone around post, 4 ft. base, 36 ins. high, for closing cor. of secs. 3 and 4, marked on brass cap

T9N R2W



C C

T8N R2W

1925

Land, mountainous.

Soil, rocky and sandy, 3rd rate.

Timber, none.

Undergrowth, greasewood, cacti, sage brush, and ocotilla.

From the cor. of secs. 4, 5, 32, and 33, on the S. bdy. of the Tp., described in book "B"

N.0°2'W., bet. secs. 32 and 33.

Over mountainous land, through scattering undergrowth.

Asc. 590 ft. over precipitous S. slope.

6.92 Wash, 20 lks. wide, 2 ft. deep, course SE.; continue asc.

9.65 Wash, 30 lks. wide, 2 ft. deep, course SE.; continue asc.


21.85 Top of rocky ridge, brs NW. and SE1; desc. 82 ft. over N. slope.

33.40 Wash, 20 lks. wide, 2 ft. deep, course SE.; asc. 82 ft. over S. slope.

35.01 Top of spur, slopes SE.; desc. 102 ft. over N. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 3 ft. base, 2 ft. high, for 1/4 sec. cor., marked on brass cap

1/4



1925

43.49 Spur, slopes E.; desc. 432 ft. over N. slope.

52.02 Wash, 20 lks. wide, 2 ft. deep, course NE.; continue desc.

56.52 Wash, 20 lks. wide, 2 ft. deep, course SE.; asc. 339 ft. over S. slope.

64.63 Spur, slopes SE.; continue asc.

76.99 Rocky ridge, brs NW. and SE.; desc. 87 ft. over N. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone, 3 ft. base, 28 ins. high, around post, for cor. of secs. 28, 29, 32, and 33., marked on brass cap

Survey of the Subdivision of T8N, R2W.

30

Chains.

T8N R2W
 S29 | S28
 S32 | S33

1925

Land, rocky and mountainous.
 Soil, rocky, 3rd and 4th rate.
 Timber, none.
 Undergrowth, palo verde, greasewood, cacti, sage brush
 and ocotilla.

40.00 East, on random line bet. secs. 28 and 33.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.10 Intersect the N. and S. line, 7 lks. S. of the cor. of
 secs. 27, 28, 33, and 34.

Thence
 S. $89^{\circ}57'W.$, on true line bet. secs. 28 and 33.
 Over rolling mountains, through scattering undergrowth.
 Desc. 80 ft. over W. slope.
 12.10 Draw, course NW.; asc. 45 ft. over E. slope.
 18.00 Spur, slopes N.; desc. 50 ft. over NW. slope.
 35.30 Wash, course NE.; asc. 36 ft. over SE. slope.
 40.05 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S28
 S33
 1925

Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 Asc. 176 ft. over E. slope.
 47.47 Spur, slopes E.; desc. 80 ft. over W. slope.
 49.65 Draw, course NE.; asc. 727 ft. over rocky E. slope.
 70.05 Rocky spur, slopes NW.; desc. 20 ft. over W. slope.
 76.60 Spur, slopes N.; continue desc.
 80.10 The cor. of secs. 28, 29, 32, and 33.

Land, mountainous.
 Soil, sandy and rocky, 3rd rate.
 Timber, none.
 Undergrowth, palo verde, greasewood, cacti, sage brush,
 and ocotilla.

N. $0^{\circ}2'W.$, bet. secs. 28 and 29.
 Over rolling mountains, through scattering undergrowth.
 Asc. S. slope very slightly.
 6.00 Rocky spur, slopes NW. and SE.; desc. 847 ft. over N.
 slope.
 9.55 Spur, slopes NW.; continue desc.
 37.25 Wash, course SE.; asc. slightly over S. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in
 the ground to bed rock, deposit a stone marked with a
 cross (+) at base of post, and raise a mound of stone
 3 ft. base, 18 ins. high, around post, for $\frac{1}{4}$ sec. cor.,
 marked on brass cap

$\frac{1}{4}$
 S29 | S28
 1925

53.00 Over level land.
 Asc. 186 ft. over S. slope.

Chains.

67.42 Spur, slopes SW.; desc. 381 ft. over N. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs 20, 21, 28, and 29, marked on brass cap

T8N	R2W
S20	S21
S29	S28

1925

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, mountainous.
 Soil, sandy and rocky, 3rd rate.
 Timber, none.
 Undergrowth, greasewood, cacti, sage brush, and cocotilla

40.00 N. 89° 57' E., on random line bet. secs. 21 and 28.
 80.06 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect the N. and S. line, 16 lks. N. of the cor. of secs. 21, 22, 27, and 28.

Thence

N. 89° 56' W., on true line bet. secs. 21 and 28.
 Over rolling mountains, through scattering undergrowth.
 Asc. 57 ft. over E. slope.
 4.80 Spur, slopes SE.; desc. 34 ft. over W. slope.
 12.20 Wash, 10 lks. wide, 2 ft. deep, course S.; asc. 52 ft. over E. slope.
 14.70 Spur, slopes N.; desc. 17 ft. over W. slope.
 15.65 Wash, 5 lks. wide, 2 ft. deep, course SE.; asc. 91 ft. over E. slope.
 20.45 Spur, slopes SW.; desc. 15 ft. over W. slope.
 23.60 Wash, 20 lks. wide, 2 ft. deep, course S.; asc. slightly
 26.60 Spur, slopes SW.; desc. 110 ft. over W. slope.
 33.90 Spur, slopes SE.; continue desc.
 40.03 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S21
S28

1925

Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.
 Desc. slightly.
 40.86 Wash, 20 lks. wide, 1 ft. deep, course S.; asc. 50 ft. over E. slope.
 44.26 Spur, slopes SW.; desc. 40 ft. over W. slope.
 47.75 Wash, 20 lks. wide, 2 ft. deep, course S.; asc. slightly over E. slope.
 49.20 Spur, slopes SE.; desc. 29 ft. over W. slope.
 56.00 Buck Horn Creek, 300 lks. wide, 1 ft. deep, dry, course SE.; asc. 57 ft. over E. slope.
 71.50 Spur, slopes SW.; desc. 23 ft. over W. slope.
 75.00 Wash, 5 lks. wide, 1 ft. deep, course NE.; asc. 40 ft. over E. slope.
 80.06 The cor. of secs. 20, 21, 28, and 29,

Land, mountainous.
 Soil, sandy and gravelly, 3rd rate.
 Timber, none.
 Undergrowth, greasewood, cacti, sage brush, and cocotilla.

N. 0° 2' W., bet. secs. 20 and 21.
 Over rolling mountains, through scattering undergrowth.

Chains.

- 6.35 Desc. 80 ft. over N. slope.
Buck Horn Creek, 300 lks. wide, 1 ft. deep, dry, course SE.; asc. 314 ft. over S. slope.
- 25.24 Spur, slopes E.; desc. slightly over N. slope.
- 27.69 Wash, 10 lks. wide, 3 ft. deep, course SE.; asc. 23 ft. over S. slope.
- 30.23 Spur, slopes E.; desc. slightly.
- 31.23 Wash, 15 lks. wide, 1 ft. deep, course SE.; asc. 85 ft. over S. slope.
- 35.06 Spur, slopes SE.; desc. 118 ft. over N. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S20 | S21

1925

- 43.83 Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor. Desc. 57 ft. over N. slope.
Wash, 15 lks. wide, 2 ft. deep, course NE.; then over almost level ground.
- 44.92 Spur, slopes SE.
- 50.22 Wash, 20 lks. wide, 2 ft. deep, course SE.
- 55.41 Spur, slopes E.; desc. slightly over N. slope.
- 58.75 Wash, 20 lks. wide, 2 ft. deep, course SE.; asc. 86 ft. over S. slope.
House brs N.52°04'W.
- 66.91 Spur, slopes W.; then over level land.
- 69.02 Wash, course SW.; asc. 42 ft. over S. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 16, 17, 20, and 21, marked on brass cap

T8N R2W
S17 | S16
S20 | S21

1925

- Raise mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
- Land, mountainous and rolling.
Soil, sandy, 3rd rate.
Timber, none.
Undergrowth, greasewood, cacti, sage brush, and ocotilla

- 40.00 S.89°56'E., on random line bet. secs. 16 and 21.
Set temp. $\frac{1}{4}$ sec. cor.
- 79.98 Intersect the N. and S. line, 28 lks. S. of the cor. of secs. 15, 16, 21 and 22.

Thence

- S.89°52'W., on true line bet. secs. 16 and 21.
Over rolling mountains, through scattering undergrowth.
Desc. 16 ft. over W. slope.
- 5.10 Wash, 25 lks. wide, 2 ft. deep, course NE.; asc. 128 ft. over E. slope.
- 17.30 Spur, slopes SE.; desc. 23 ft. over W. slope.
- 22.30 Wash, 10 lks. wide, 1 ft. deep, course SE.; asc. 109 ft. over E. slope.
- 27.10 Spur, slopes NE.; desc. slightly over W. slope.
- 37.55 Wash, 15 lks. wide, 2 ft. deep, course SE.
- 39.99 Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 3 ft. base, 21 ins. high, for $\frac{1}{4}$ sec. cor., marked on brass cap

Chains.

1/4 S16
S21
1925

- Asc. 83 ft. over E. slope.
- 48.13 Spur, slopes SE.; desc. 110 ft. over W. slope.
- 64.00 Wash, 10 lks. wide, 2 ft. deep, course NW.; asc. 46 ft. over E. slope.
- 74.00 Spur, slopes NW.; desc. 77 ft. over W. slope.
- 79.98 The cor. of secs. 16, 17, 20, and 21.

Land, mountainous.
 Soil, sandy and rocky, 3rd rate.
 Timber, none.
 Undergrowth, sage brush, cacti, ocotilla, greasewood, and mescal.

- N.0°2'W., bet. secs. 16 and 17.
- Over rolling mountains, through scattering undergrowth.
- Desc. 110 ft. over N. slope.
- 15.06 Wash, 20 lks. wide, 2 ft. deep, course SE.; asc. 72 ft. over S. slope.
- 19.59 Ridge, brs NW. and SE.; desc. 113 ft. over N. slope.
- 23.73 Wash, 20 lks. wide, 2 ft. deep, course SE.; asc. 323 ft. over S. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4
S17 | S16

1925

- Raise mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.
- Asc. 45 ft. over S. slope.
- 41.34 Top of spur, slopes SE.; desc. 175 ft. over N. slope.
- 49.01 Wash, 20 lks. wide, 2 ft. deep, course SE.; asc. 246 ft. over S. slope.
- 60.17 Ridge, brs NW. and SE.; desc. 293 ft. over N. slope.
- 63.19 Intersect the side line of the ~~Uncler~~ ~~John~~ patented mining claim, Survey No. 1754, at a point N.36°47'W., 2.95 chs. from corner No. 3.
- 67.50 Wash, course SE.; asc. S. slope slightly.
- 71.91 Spur, slopes SE.; desc. 46 ft. over N. slope.
- 75.56 Wash, 15 lks. wide, 2 ft. deep, course SE.; asc. 22 ft. over S. slope.
- 78.12 Spur, slopes NE.; desc. 49 ft. over N. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 8, 9, 16, and 17, marked on brass cap

T8N R2W
S 8 | S 9
S17 | S16

1925


Raise mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.
 Land, rolling and mountainous.
 Soil, sandy and rocky, 3rd rate.
 Timber, none.
 Undergrowth, greasewood, cacti, sage brush, ocotilla;

Chains.	
	N.89°52'E., on random line bet. secs. 9 and 16
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.10	Intersect the N. and S. line, 17 lks. N. of the cor. of secs. 9,10,15, and 16.
	Thence
	S.89°59'W., on true line bet. secs. 9 and 16.
	Over rolling mountains, through scattering undergrowth.
	Asc. 314 ft. over broken E. slope.
6.00	Wash, 10 lks. wide, 2 ft. deep, course SE.; continue asc.
15.50	Spur, slopes SE.; desc. 85 ft. over W. slope.
23.61	Wash, 10 lks. wide, 2 ft. deep, course SE.; asc. 107 ft. over E. slope.
29.30	Spur, slopes SE.; desc. 30 ft. over W. slope.
31.40	Telephone line, brs N. and S.
31.73	Wash, 15 lks. wide, 2 ft. deep, course SE.; asc. 152 ft. over E. slope.
40.05	Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 3 ft. base, 14 ins. high, for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S 9 316 1925
	Asc. 192 ft. over E. slope:
54.17	Spur, slopes SE.; desc. 13 ft. over W. slope.
60.57	Spur, slopes NW.; desc. 145 ft. over W. slope.
69.05	Wash, 20 lks. wide, 2 ft. deep, course NE.; asc. 69 ft. over E. slope.
70.00	Spur, slopes NE.; desc. 54 ft. over W. slope.
70.18	Intersect the E. side line of the Dummy patented mineral claim, Survey No. 1754, at a point S.36°53'E., 9.60 chs. from cor. No. 1 thereof.
73.05	Wash, 50 lks. wide, 2 ft. deep, course NE.; asc. 173 ft. over E. slope.
78.66	Spur, slopes NE.; desc. 28 ft. over W. slope.
80.10	The cor. of secs. 8,9,16, and 17.
	Land, mountainous.
	Soil, sandy and rocky, 3rd rate.
	Timber, none.
	Undergrowth, greasewood, cacti, sage brush, ocotilla, and palo verde.
	N.0°2'W., bet. secs. 8 and 9
	Over rolling mountains, through scattering undergrowth.
	Desc. 118 ft. over N. slope.
6.48	Wash, 20 lks. wide, 2 ft. deep, course NE.; desc. 132 ft. over N. slope.
18.18	Wash, 30 lks. wide, 2 ft. deep, course SE.; asc. 67 ft. over S. slope.
20.73	Smelter, brs West, 3.00 chs. dist.
23.21	Desc. 40 ft. over N. slope.
24.21	Wash, course SE.; asc. 216 ft. over S. slope.
37.23	Spur, slopes SE.; desc. 75 ft. over N. slope.
	U.S.L.M. No 1754 brs. S.41°35'E., 3.73 chs. dist.
40.00	True point for $\frac{1}{4}$ sec. cor. falls on mine dump, unsuitable for permanent cor.
40.60	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for witness cor. to $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ W/C S 8 S 9 1925

Survey of the Subdivision of T8N, R2W.

Chains.

- Raise mound of stone, 2 ft. base, 1½ ft. high, W. of cor. Asc. 49 ft. over S. slope.
- 43.07 Spur, slopes SE.; desc. slightly over N. slope.
- 45.07 Wash, 25 lks. wide, 2 ft. deep, course SE.; asc. 15 ft. over S. slope.
- 46.77 Spur, slopes SE
- 50.97 Ridge, brs NW. and SE.; desc. 206 ft. over N. slope.
- 64.11 Wash, 35 lks. wide, 2 ft. deep, course SE.; asc. 239 ft. over S. slope.
- 72.33 Ridge, brs NW. and SE.; desc. 70 ft. over N. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 4, 5, 8, and 9, marked on brass cap



1925


Raise mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, mountainous.
 Soil, sandy and rocky, 3rd rate. Timber, none.
 Undergrowth, sagebrush, cacti, greasewood and ocotillo.
 Note: search within a wide radius of 51.15 ch. station on sec. line bet. secs. 8 and 9 failed to reveal any trace of either of Cors. 2 and 3 of Atlanta pat. mining claim, Min. Surv. No. 1754, therefore no intersection with the N. end line of said claim could be obtained.

- N. 89° 59' E., on random line bet. secs. 4 and 9.
- 40.00 Set temp. ¼ sec. cor.
- 80.06 Intersect the N. and S. line, 26 lks. N. of the cor. of secs. 3, 4, 9, and 10.

Thence
 N. 89° 50' W., on true line bet. secs. 4 and 9.
 Over rolling mountains, through scattering undergrowth.
 Desc. slightly over W. slope.

- 3.50 Wash, 35 lks. wide, 2 ft. deep, course SE.; asc. 57 ft. over E. slope.
- 9.90 Spur, slopes SE.; desc. 30 ft. over W. slope.
- 11.55 Wash, 40 lks. wide, 2 ft. deep, course SE.; asc. 272 ft. over E. slope.
- 16.15 Spur, slopes SW.; desc. 387 ft. over W. slope.
- 38.00 Wash, 25 lks. wide, 2 ft. deep, course SW.; asc. 30 ft. over E. slope.
- 40.03 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 3 ft. base, 12 ins. high, for ¼ sec. cor., marked on brass cap



- The ¼ sec. cor. falls on spur, sloping SW.; desc. 134 ft. over W. slope.
- 44.05 Castle Creek, 100 lks. wide, 1 ft. deep, with small stream of water in bottom, course SE.
- 50.47 Wash, 10 lks. wide, 2 ft. deep, course NE.; asc. 345 ft. over E. slope.
- 54.05 Telephone line brs N. 16° W. and S. 16° E.
- 65.85 Spur, slopes NE.; desc. 55 ft. over W. slope.
- 70.80 Wash, 15 lks. wide, 2 ft. deep, course NE.; asc. 50 ft. over E. slope.
- 72.65 Top of spur, slopes E.; desc. 20 ft. over W. slope.
- 75.00 Wash, 10 lks. wide, 2 ft. deep, course NE.; asc. 91 ft. over E. slope.
- 79.00 Spur, slopes NE.; desc. 15 ft. over W. slope.

Chains.

80.06 The cor. of secs. 4, 5, 8, and 9.
 Land, mountainous.
 Soil, sandy and rocky, 3rd rate.
 Timber, none.
 Undergrowth, greasewood, cacti, sage brush, and ocotilla.

N.0°2'W., bet. secs. 4 and 5.
 Over rolling mountains, through scattering undergrowth.
 Desc. 50 ft. over N. slope.
 2.00 Wash, 30 lks. wide, 2 ft. deep, course E.; asc. 126 ft.
 over S. slope.
 10.80 Top of spur, slopes E.; desc. 186 ft. over N. slope.
 21.56 Telephone line, brs E. and W.
 24.56 Wash, 30 lks. wide, 2 ft. deep, course SE.; then over
 level ground.
 30.56 Spur, slopes E.; desc. 34 ft. over N. slope.
 39.13 Wash, 20 lks. wide, 2 ft. deep, course SE.; asc. slightly
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 S 5 | S 4

1925

Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Asc. slightly over S. slope.
 42.00 Desc. 52 ft. over N. slope.
 46.54 Wash, course SE.; then over rolling ground.
 52.74 Castle Creek, with running water 50 lks. wide, 8 ins.
 deep, course SE.; then over rolling land.
 55.27 Wash, 20 lks. wide, 1 ft. deep, course SW.; asc. 224 ft.
 over S. slope.
 67.28 Rocky spur, slopes SE.; desc. 80 ft. over N. slope.
 75.12 Intersect the Second Standard Parallel North, at a point
 6.64 chs. East of the standard cor. of secs. 32 and 33,
 T9N, R2W., which is an iron post, 2 ins. diam., firmly
 set, properly marked on brass cap, and witnessed by
 mound of stone N. of cor.
 At point of intersection, set an iron post, 3 ft. long,
 2 ins. diam., 15 ins. in the ground to bed rock, de-
 posit a stone marked with a cross (+) at base of post,
 and raise a mound of stone, 3 ft. base, 21 ins. high,
 around post, for closing cor. of secs. 4 and 5, marked
 on brass cap

T9N R2W

S 33
 S 5 | S 4

CG

T8N R2W

1925

Land, mountainous.
 Soil, sandy and rocky, 3rd rate.
 Timber, none.
 Undergrowth, greasewood, sage brush, cacti, and ocotilla.

From the cor. of secs. 5, 6, 31, and 32, on the S. bdy.
 of the Tp., described in book "B"
 N.0°3'W., bet. secs. 31 and 32.
 Over mountainous land, through heavy undergrowth.
 Desc. 496 ft. over NW. slope.

Survey of the Subdivision of T8N, R2W.

Chains.

36.80 Draw, course W.; asc. 59 ft. over SE. slope.
 39.00 Spur, slopes W.; desc. slightly.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone 5 ft. base, 2½ ft. high around post, for ¼ sec. cor. marked on brass cap

¼
 S31 | S32

1925

Desc. 175 ft. over NW. slope.
 51.60 Wash, 80 lks. wide, course NE.; asc. 57 ft. over SE. slope.
 60.00 Spur, slopes E.; desc. 84 ft. over NE. slope.
 65.60 Draw, course E.; asc. 182 ft. over SE. slope.
 77.50 Spur, slopes E.; desc. 57 ft. over NE. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 4 ft. base, 28 ins. high, for cor. of secs. 29, 30, 31, and 32, marked on brass cap

T8N R2W
 S30 | S29
 S31 | S32

1925

Land, mountainous.
 Soil, rocky, and sandy, 4th rate.
 Timber, none.
 Undergrowth, oak brush, laurel, buck brush, ocotilla, and mesquite.

40.00 East, on random line bet. secs. 29 and 32.
 80.18 Set temp. ¼ sec. cor.
 Intersect the N. and S. line, 9 lks. S. of the cor. of secs. 28, 29, 32, and 33.

Thence
 S. 89° 56' W., on true line bet. secs. 29 and 32.
 Over rolling mountains, through scattering undergrowth.

4.60 Desc. 107 ft. over W. slope.
 Wash, 35 lks. wide, 2 ft. deep, course N.; asc. 23 ft. over E. slope.
 5.65 Rocky spur, slopes NW.; desc. 10 ft. over W. slope.
 9.14 Wash, 40 lks. wide, 2 ft. deep, course N.; asc. 29 ft. over E. slope.
 12.12 Rocky spur, slopes NW.; desc. 221 ft. over W. slope.
 18.26 Wash, 35 lks. wide, 2 ft. deep, course N.; asc. 145 ft. over E. slope.
 26.13 Rocky spur, slopes NW.; desc. 310 ft. over W. slope.
 34.00 Wash, 25 lks. wide, 2 ft. deep, course NW.; asc. 106 ft. over E. slope.
 40.09 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 4 ft. base, 28 ins. high, for ¼ sec. cor., marked on brass cap

¼ S29
 S32
 1925

70.58 Desc. 508 ft. over NW. slope.
 Wash, 80 lks. wide, course N. 10° E.; asc. 152 ft. over E. slope

Chains.

77.00
80.18Slope changes to NE.
The cor. of secs. 29, 30, 31, and 32.Land, rolling mountains.
Soil, rocky, 4th rate.
Timber, none.

Undergrowth, oak brush, laurel, buck brush, ocotilla, and cacti.

40.00
84.50West, on random line bet. secs. 30 and 31.
Set temp. $\frac{1}{4}$ sec. cor.
Intersect the W. bdy. of the Tp., 20 lks. S. of the cor. of secs. 25, 30, 31, and 36., hereinbefore described.

Thence

S. $89^{\circ}52'E.$, on true line bet. secs. 30 and 31.
Over rolling mountains, through heavy undergrowth.
Desc. 356 ft. over SE. slope.34.30
41.80Wash, 70 lks. wide, course S. $80^{\circ}E.$; continue desc.
Same wash, 70 lks. wide, course N. $80^{\circ}E.$; asc. 36 ft. over NW. slope.

44.50

Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 3 ft. base, 20 ins. high, for $\frac{1}{4}$ sec. cor., marked on brass cap $\frac{1}{4}$ S30
S31
192550.40
60.90
63.40
65.60
72.60
84.50Asc. 41 ft. over NW. slope.
Spur, slopes N.; desc. 103 ft. over NE. slope.
Gulch, course N.; asc. 64 ft. over NW. slope.
Spur, slopes N.; desc. 40 ft. over NE. slope.
Draw, course N. $10^{\circ}E.$; asc. 86 ft. over NW. slope.
Spur, slopes NE.; desc. 130 ft. over NE. slope.
The cor. of secs. 29, 30, 31, and 32.

Land, rolling mountains.

Soil, rocky and sandy, 3rd rate.

Timber, none.

Undergrowth, buck brush, sage brush, mesquite, and cacti.

6.40
14.00
16.90
20.00
40.00
42.00N. $0^{\circ}3'W.$, bet. secs. 29 and 30.
Over rolling mountains, through heavy undergrowth.
Desc. 125 ft. over NE. slope.
Wash, 70 lks. wide, course N. $80^{\circ}E.$; asc. 131 ft. over SE. slope.
Spur, slopes E.; desc. 53 ft. over NE. slope.
Draw, course E.; asc. 39 ft. over SE. slope.
Spur, slopes SE.; desc. 289 ft. over NE. slope.
True point for $\frac{1}{4}$ sec. cor. falls in draw, course E., unsuitable for cor.; asc. 83 ft. over S. slope.
Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for witness cor. to $\frac{1}{4}$ sec. cor., marked on brass cap $\frac{1}{4}$
S30 | S29
W C
1925

Survey of the Subdivision of T8N, R2W.

Chains. Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.
 Asc. 20 ft. over SE. slope.
 44.40 Spur, slopes E.; desc. 40 ft. over NE. slope.
 52.80 Gulch, course E.; asc. 88 ft. over SE. slope.
 57.10 Spur, slopes NE.; desc. 108 ft. over N. slope.
 65.80 Draw, course N.70°E.; asc. 96 ft. over SE. slope.
 70.90 Spur, slopes E.; desc. 44 ft. over NE. slope.
 73.80 Draw, course E.; asc. 95 ft. over SE. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in
 the ground to bed rock, deposit a stone marked with a
 cross (+) at base of post, and raise a mound of stone
 around post, 4 ft. base, 20 ins. high, for cor. of secs.
 19, 20, 29, and 30., marked on brass cap

T8N R2W
 S19 | S20
 S30 | S29

1925

Land, rolling mountains,
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, sage brush, oak brush, ocotilla, catclaw,
 and mesquite.

40.00 N.89°56'E., on random line bet. secs. 20 and 29.
 Set temp. 1/4 sec. cor.
 80.30 Intersect the N. and S. line, 7 lks. S. of the cor. of
 secs. 20, 21, 28, and 29.

Thence
 S.89°53'W., on true line bet. secs. 20 and 29.
 Over rolling mountains, through scattering undergrowth.
 Asc. 38 ft. over E. slope.

3.04 Spur, slopes N.; desc. 84 ft. over W. slope.
 17.10 Buck Horn wash, dry, 100 lks. wide, 1 ft. deep, course
 NE.; then over level ground.

Buckhorn
 37.30 Wash, 100 lks. wide, 1 ft. deep, course SE. (Dry)
 40.15 Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in
 the ground to bed rock, deposit a stone marked with a
 cross (+) at base of post, and raise a mound of stone
 3 ft. base, 14 ins. high, around post, for 1/4 sec. cor.,
 marked on brass cap

1/4 S20
 S29
 1925

41.80 Leave wash land, brs NW. and SE.; asc. 124 ft. over
 NE. slope.
 52.60 Slope changes to S.; thence along same.
 70.90 Draw, course S.60°E.; asc. 153 ft. over NE. slope.
 80.30 The cor. of secs. 19, 20, 29, and 30.

Land, rolling mountains.
 Soil, sandy and rocky, 3rd rate.
 Timber, none.
 Undergrowth, mesquite, sage brush, spanish dagger and
 oak brush.

40.00 N.89°52'W., on random line bet. secs. 19 and 30.
 Set temp. 1/4 sec. cor.
 84.42 Intersect the W. bdy. of the Tp., 5 lks. S. of the cor.
 of secs. 19, 24, 25, and 30, hereinbefore described.

Chains.

Thence
 S.89°50'E., on true line bet. secs. 19 and 30.
 Over rolling mountains, through desert growth.
 Desc. 79 ft. over SE. slope.
 6.12 Wash, 100 lks. wide, course NE.; asc. 114 ft. over NW. slope.
 13.12 Spur, slopes N.; desc. 45 ft. over NE. slope.
 16.72 Draw, course N.; asc. 45 ft. over W. slope.
 18.12 Spur, slopes N.; desc. 52 ft. over NE. slope.
 21.22 Gulch, course N.; asc. 132 ft. over NW. slope.
 25.02 Spur, slopes NE.; desc. 203 ft. over broken E. slope.
 32.02 Dim road, brs NW. and S.
 44.42 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

 $\frac{1}{4}$ S19

S30

1925

Raise mound of stone, 3 ft. base, 2 ft. high N. of cor.
 Desc. 141 ft. over E. slope.
 61.12 Draw, course N.70°E.; asc. 136 ft. over NW. slope.
 80.92 Granite ledge brs NW. and SE.; desc. 104 ft. over NE.
 slope.
 84.42 The cor. of secs. 19, 20, 29, and 30.

Land, rolling mountains.
 Soil, rocky and sandy, 3rd and 4th rate.
 Timber, none.
 Undergrowth, sage brush, oak, mesquite, catclaw, and
 cacti.

N.0°3'W., bet. secs. 19 and 20.
 Over rolling mountains, through desert growth.
 Desc. 103 ft. over NE. slope.
 6.70 Draw, course SE.; asc. 49 ft. over S. slope.
 10.80 Spur, slopes S.60°E.; desc. 84 ft. over NE. slope.
 22.50 Draw, course SE.; asc. 73 ft. over S. slope.
 27.30 Spur, slopes SE.; desc. 79 ft. over NE. slope.
 33.50 Enter Buck Horn wash, dry, course SE.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

 $\frac{1}{4}$

S19 | S20

1925

42.00 Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.
 Road, brs N.60°W. to Wickenburg and S.60°E. to Buck Horn
 Mine.
 Also main channel of Buck Horn Wash, 200 lks. wide, course
 S.60°E. (Dry)
 43.00 Leave Buck Horn wash; asc. 234 ft. over S. slope.
 54.30 Spur, slopes SE.; desc. 96 ft. over NE. slope.
 58.40 Draw, course SE.; asc. 265 ft. over S. slope.
 69.50 Spur, slopes SE.; desc. 140 ft. over NE. slope.
 80.00 True point for cor. falls in gulch, course SE., unsuitable
 for permanent cor. Set temp. cor.
 (Description of witness cor. will be found in notes of line
 bet. secs. 17 and 18)

Land, rolling mountains.
 Soil, sandy and rocky, 4th rate.
 Timber, none.
 Undergrowth, sage brush, oak brush, catclaw, and mesquite

Survey of the Subdivision of T8N, R2W.

Chains.	From the true point for cor. of secs. 17, 18, 19, and 20. N.89°53'E., on random line bet. secs. 17 and 20.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.20	Intersect the N. and S. line, 35 lks. N. of the cor. of secs. 16, 17, 20, and 21.
	Thence
	N.89°52'W., on true line bet. secs. 17 and 20.
	Over rolling mountains, through scattering undergrowth.
	Desc. 57 ft. over W. slope.
3.19	Wash, 10 lks. wide, 1 ft. deep, course SW.
8.72	Wash, 15 lks. wide, 2 ft. deep, course S.; asc. 64 ft. over E. slope.
12.84	Spur, slopes SE.; desc. 46 ft. over W. slope.
21.29	Wash, 20 lks. wide, 2 ft. deep, course SE.; asc. 212 ft. over E. slope.
35.72	Spur, slopes NW.; desc. 116 ft. over W. slope.
40.10	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S17 S20 1925
40.15	Raise mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor. Wash, 10 lks. wide, 2 ft. deep, course S.; asc. 20 ft. over E. slope.
41.06	Spur, slopes SE.
46.56	Spur, slopes SW.; desc. 63 ft. over W. slope.
50.56	Wash, 15 lks. wide, 2 ft. deep, course S.; asc. 81 ft. over E. slope.
55.31	Spur, slopes SE.
58.30	Spur, slopes SE.; desc. 170 ft. over W. slope.
70.21	Road to Buck Horn Mine, brs NW. and SE.; Asc. slightly over broken E. slope.
72.91	Spur, slopes SE.; desc. 21 ft. over W. slope.
75.00	Wash, 20 lks. wide, 2 ft. deep, course SE.
76.58	Wash, 20 lks. wide, 2 ft. deep, course SE.; asc. slightly over E. slope.
80.20	The cor. of secs. 17, 18, 19, and 20. <u>true point for</u> Land, rolling mountains. Soil, sandy and rocky, 3rd rate. Timber, none. Undergrowth, palo verde, juniper, greasewood, cacti, ocotilla, and sage brush.
	From the true point for cor. of secs. 17, 18, 19, and 20. N.89°50'W., on random line bet. secs. 18 and 19
40.00	Set temp. $\frac{1}{4}$ sec. cor.
84.26	Intersect the W. bdy. of the Tp., 25 lks. N. of the cor. of secs. 13, 18, 19, and 24, hereinbefore described.
	Thence
	East, on true line bet. secs. 18 and 19.
	Over rolling mountains, through scattered desert growth.
	Desc. 78 ft. over NE. slope.
4.60	Draw, course S.70°E.; asc. 21 ft. over SW. slope.
15.20	Point of spur, slopes SE.; desc. 80 ft. over E. slope.
18.20	Enter Buck Horn Wash, course SE.
21.40	Road, brs NW. to Wickenburg and SE. to Buck Horn Mine.
22.50	Leave Buck Horn Wash, course SE.; asc. 36 ft. over SW. slope.
23.80	Spur, slopes SW.; desc. 26 ft. over SE. slope.
25.80	Draw, course SE.; asc. 26 ft. over SE. slope.
28.70	Spur, slopes S.; desc. 58 ft. over SE. slope.
33.70	Draw, course S.; asc. 138 ft. over SW. slope.
39.10	Spur, slopes S.; desc. 79 ft. over E. slope.
41.80	Draw, course S.; asc. slightly to $\frac{1}{4}$ sec. cor.
44.26	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in

Chains.

the ground, for 1/4 sec. cor., marked on brass cap

1/4 S18
S19
1925

from which

A juniper, 8 ins. diam., brs N.74°E., 294 lks. dist., marked 1/4 S18 BT.

A cedar, 6 ins. diam., brs S.82°W., 89 lks. dist., marked 1/4 S19 BT.

Asc. 100 ft. over W. slope.

55.10 Spur, slopes S.20°W.; desc. 55 ft. over SE. slope.

59.90 Draw, course S.10°W.; asc. 202 ft. over SW. slope.

73.90 Spur, slopes SE.; desc. 256 ft. over NE. slope.

84.26 The true point for cor. of secs. 17,18,19, and 20.

Land, rolling mountains.

Soil, sandy and rocky, 3rd rate.

Timber, very scattered juniper and cedar.

Undergrowth, sage brush, catclaw, buck brush, and mesquite.

From true point for cor. of secs. 17,18,19, and 20. N.0°3'W., bet. secs. 17 and 18.

Over rolling mountains, through desert growth.

0.10 Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 5 ft. base, 2 1/2 ft. high, for witness cor. to cor. of secs. 17,18,19, and 20, marked on brass cap

T8N R2W
S18 | S17
S19 | S20
W C
1925

Desc. 23 ft. over NE. slope.

1.10 Draw, course S.70°E.; asc. 75 ft. over SE. slope.

4.90 Spur, slopes E.; desc. 78 ft. over NE. slope.

Buck Horn mine brs East, about 5.00 chs. dist.

10.80 Draw, course S.60°E.; asc. 67 ft. over S. slope.

13.30 Spur, slopes SE.; desc. 40 ft. over NE. slope.

17.20 Draw, course SE.; asc. 240 ft. over S. slope.

39.10 Spur, slopes S.20°E.; desc. 10 ft. over NE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4
S18 | S17

1925

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Desc. 33 ft. over NE. slope.

43.90 Draw, course S.20°E.; asc. 326 ft. over S. slope.

57.20 Ridge, brs E. and W.; desc. 412 ft. over N. slope.

77.50 Wash, 80 lks. wide, course E.; asc. 47 ft. over SW. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 7,8,17, and 18, marked on brass cap

T8N R2W
S 7 | S 8
S18 | S17

1925

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Chains.

Land, rolling mountains.
Soil, sandy and rocky loam, 3rd rate.
Timber, none.
Undergrowth, oak, sage brush, cat claw, and mesquite.

40.00 S. 89°52'E., on random line bet. secs. 8 and 17.
Set temp. $\frac{1}{4}$ sec. cor.
80.20 Intersect the N. and S. line, 9 lks. N. of the cor. of
secs. 8, 9, 16, and 17.

Thence
N. 89°48'W., on true line bet. secs. 8 and 17.
Over rolling mountains, through scattering undergrowth.
3.50 Spur, slopes NE.; asc. 192 ft. over E. slope.
Asc. 192 ft. over E. slope.
5.82 Wash, course NE.; continue asc.
13.13 Intersect the side line of the Mossade patented mining
claim, Survey No. 1754, at a point N. 36°47'W., 1.00 ch.
from cor. No. 3
14.50 Spur, slopes NE.; desc. 175 ft. over W. slope.
19.61 Wash, 15 lks. wide, 1 ft. deep, course NE.; asc. 40 ft.
over E. slope.
21.74 Spur, slopes NW.
24.44 Spur, slopes NE.; desc. 23 ft. over W. slope.
28.92 Wash, 20 lks. wide, 2 ft. deep, course NE.; asc. 113 ft.
over E. slope.
33.62 Spur, slopes NE.; desc. 28 ft. over W. slope.
40.10 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 8
S17
1925

Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
Desc. 51 ft. over W. slope.
43.00 Wash, 40 lks. wide, 2 ft. deep, course NE.; asc. 214 ft.
over E. slope.
47.48 Spur, slopes NE.
49.97 Spur, slopes NE.
53.65 Top of rocky spur, slopes NW.; desc. 46 ft. over W. slope.
58.60 Draw, course NE.; asc. 53 ft. over E. slope.
60.92 Top of spur, slopes NE.
64.02 Top of spur, slopes NW.; desc. 210 ft. over W. slope.
76.96 Wash, 50 lks. wide, 2 ft. deep, course NE.; asc. 23 ft.
over E. slope.
80.20 The cor. of secs. 7, 8, 17, and 18.

Land, mountainous.
Soil, sandy and rocky, 3rd rate.
Timber, none.
Undergrowth, greasewood, cacti, sage brush, and ocotilla.

40.00 West, on random line bet. secs. 7 and 18.
Set temp. $\frac{1}{4}$ sec. cor.
84.24 Intersect the W. bdy. of the Tp., 10 lks. N. of the cor.
of secs. 7, 12, 13, and 18., hereinbefore described.

Thence
N. 89°56'E., on true line bet. secs. 7 and 18.
Over rolling mountains, through scattering undergrowth.
Asc. slightly.
.34 Ridge, brs N. 10°W. and S. 10°E.; desc. 115 ft. over E.
slope.
8.64 Draw, course S. 70°E.; then along broken S. slope.
20.04 Gulch, course S.; asc. 138 ft. over W. slope.

Chains.	
27.24	Ridge, brs NW. and S.10°E.; desc. 202 ft. over NE. slope.
38.74	Low saddle in same ridge, brs N.10°E. and S.10°W.; slope changes to SE.; continue desc.
44.24	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S 7 $\frac{S 18}{1925}$
	Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor. Desc. 231 ft. over SE. slope.
58.14	Wash, 50 lks. wide, course N.70°E.; asc. 67 ft. over NW. slope.
62.84	Point of spur, slopes N.; desc. 169 ft. over NE. slope.
77.34	Wash, 80 lks. wide, course SE.; asc. 41 ft. over SW. slope.
84.24	The cor. of secs. 7, 8, 17, and 18.

Land, rolling mountains.
 Soil, sandy and rocky, 3rd rate.
 Timber, none.
 Undergrowth, sage brush, oak brush, cacti, and mesquite.

	N.0°3'W., bet. secs. 7 and 8. Over rolling mountains, through scattering undergrowth. Asc. 99 ft. over S. slope.
8.37	Spur, slopes NW.; desc. 40 ft. over N. slope.
11.37	Wash, 10 lks. wide, 2 ft. deep, course SE.; asc. 40 ft. over S. slope.
20.56	Spur, slopes SE.; desc. 96 ft. over N. slope.
25.65	Wash, course SE.; asc. 139 ft. over S. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S 7 S 8 1925
	Raise mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. Asc. 377 ft. over S. slope.
54.11	Ridge, brs NW. and SE.; desc. 145 ft. over N. slope.
62.88	Wash, 10 lks. wide, 2 ft. deep, course NW.; asc. 24 ft. over S. slope.
67.21	Spur, slopes W.; desc. 80 ft. over N. slope.
70.21	Wash, course NW.; asc. 42 ft. over S. slope.
76.82	Telephone line, brs N.66°E. and S.66°W.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 5, 6, 7, and 8, marked on brass cap

T8N R2W
 S 6 | S 5
 S 7 | S 8

1925

Raise mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Land, mountainous.
 Soil, rocky and sandy, 3rd rate.
 Timber, none.
 Undergrowth, greasewood, cacti, sage brush, and ocotilla.

Chains. S.89°48'E., on random line, bet. secs. 5 and 8.
 40.00 Set temp. $\frac{1}{4}$ sec. cor. line bet. secs. 5 and 8.
 80.04 Intersect the N. and S. line, 2 lks. N. of the cor. of
 secs. 4, 5, 8, and 9.

Thence
 N.89°47'W., on true line bet. secs. 5 and 8.
 Over rolling mountains, through scattering undergrowth.
 2.00 Wash, 20 lks. wide, 2 ft. deep, course NE.; asc. 17 ft.
 over E. slope.
 3.49 Spur, slopes SE.; desc. 30 ft. over W. slope.
 5.84 Wash, 20 lks. wide, 2 ft. deep, course NE.; asc. 18 ft.
 over E. slope.
 7.88 Spur, slopes NE.; desc. 20 ft. over W. slope.
 9.88 Wash, 20 lks. wide, 2 ft. deep, course NE.; asc. 175 ft.
 over E. slope.
 14.57 Spur, slopes SE.; desc. slightly over W. slope.
 18.00 Wash, 10 lks. wide, 2 ft. deep, course S.; asc. 20 ft.
 over E. slope.
 20.52 Spur, slopes SW.; desc. 80 ft. over W. slope.
 30.43 Wash, 40 lks. wide, 2 ft. deep, course SW.
 36.18 Spur, slopes SW.; desc. 41 ft. over W. slope.
 40.02 Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in
 the ground to bed rock, deposit a stone marked with
 a cross (+) at base of post, and raise mound of stone
 3 ft. base, 21 ins. high, around post, for $\frac{1}{4}$ sec. cor.,
 marked on brass cap

$\frac{1}{4}$ S 5
 S 8
 1925

Asc. 64 ft. over E. slope.
 42.83 Ridge, brs NW. and SE.; asc. 50 ft. over E. slope.
 51.39 Spur, slopes N.; desc. 96 ft. over W. slope.
 55.14 Wash, course NE.; asc. 26 ft. over E. slope.
 56.99 Spur, slopes N.
 60.79 Spur, slopes N.; desc. slightly over W. slope.
 62.49 Wash, 25 lks. wide, 2 ft. deep, course NE.; asc. 186 ft.
 over E. slope.
 71.59 Telephone line, brs N.66°E. and S.66°W.
 78.56 Top of spur, slopes N.; desc. 26 ft. over W. slope.
 80.04 The cor. of secs. 5, 6, 7, and 8.

Land, mountainous.
 Soil, sandy and rocky, 3rd rate.
 Timber, none.
 Undergrowth, palo verde, greasewood, cacti, sage brush,
 and ocotilla.

40.00 S.89°56'W., on random line bet. secs. 6 and 7.
 Set temp. $\frac{1}{4}$ sec. cor.
 84.24 Intersect the W. bdy. of the Tp., 5 lks. S. of the cor.
 of secs. 1, 6, 7, and 12, hereinbefore described.

Thence
 N.89°58'E., on true line bet. secs. 6 and 7.
 Over rolling mountains, through medium undergrowth.
 Asc. 72 ft. over SW. slope.
 2.50 Spur, slopes S.; desc. 60 ft. over SE. slope.
 5.50 Draw, course S.; asc. 142 ft. over SW. slope.
 10.40 Smoke stack on mine building brs S.49°E.
 Spur, slopes S.; desc. 148 ft. over SE. slope.
 14.70 Draw, course S.; asc. 54 ft. over SW. slope.
 17.90 Spur, slopes S.; desc. 285 ft. over SE. slope.
 18.90 Mine shaft, brs N., 2.50 chs. dist.
 24.80 Dim road, brs NW. and SE.
 34.40 Intersect S. end of mine building, 40 ft. long, 30 ft.
 wide.

Chains.

- 37.60 Road, brs NW. and S.
 42.40 Draw, course NE.; asc. 38 ft. over NW. slope.
 43.00 Road, brs NE. and SW.
 44.24 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 3 ft. base, 1½ ft. high, for ¼ sec. cor., marked on brass cap

$$\frac{1}{4} \begin{array}{c} S 6 \\ S 7 \\ 1925 \end{array}$$

- Asc. 24 ft. over NW. slope.
 45.30 Spur, slopes N.; desc. 89 ft. over NE. slope.
 50.80 Enter wash, with small stream of water in bottom, course E. (Stream is 3 lks. wide, 2 ins. deep)
 55.00 Leave wash, course N.70°E.; asc. 44 ft. over NW. slope.
 59.30 Spur, slopes NE.; desc. 89 ft. over E. slope.
 68.50 Draw, course N.; asc. 80 ft. over NW. slope.
 72.40 Spur, slopes N; desc. 15 ft. over NE. slope.
 77.60 Draw, course N.10°W.; asc. 229 ft. over W. slope.
 84.24 The cor. of secs. 5, 6, 7, and 8.

Land, rolling mountains.
 Soil, sandy and rocky, 3rd rate.
 Timber, scattering cottonwood along stream.
 Undergrowth, oak brush, sage brush, mesquite, cat claw, and cacti.

- N.0°3'W., bet. secs. 5 and 6.
 Over rolling mountains, through scattering undergrowth.
 .55 Spur, slopes NW.; desc. 281 ft. over N. slope.
 14.94 Wash, 20 lks. wide, 2 ft. deep, with small stream of water, 3 lks. wide, 3 ins. deep, course SE.; asc. 99 ft. over S. slope.
 23.88 Spur, slopes SE.; desc. 30 ft. over N. slope.
 26.23 Wash, 10 lks. wide, 2 ft. deep, course SE.; asc. 117 ft. over S. slope.
 34.22 Spur, slopes SE.; desc. 73 ft. over N. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

$$\frac{1}{4} \begin{array}{c} S 6 | S 5 \\ 1925 \end{array}$$

- 40.50 Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.
 Wash, 15 lks. wide, 2 ft. deep, course SE.; asc. 160 ft. over S. slope.
 47.43 Ridge, brs NW. and SE.; desc. 187 ft. over N. slope.
 53.80 Wash, 20 lks. wide, 2 ft. deep, course NE.; asc. 37 ft. over S. slope.
 60.65 Spur, slopes E.; desc. 29 ft. over N. slope.
 65.63 Wash, 10 lks. wide, 2 ft. deep, course SE.; asc. 31 ft. over S. slope.
 72.09 Spur, slopes NW.; desc. 77 ft. over N. slope.
 74.96 Intersect the Second Standard Parallel North, at a point, 6.90 chs. East of the standard cor. of secs. 31 and 32, T9N, R2W., which is an iron post, 2 ins. diam., firmly set, properly marked on brass cap, and witnessed by mound of stone N. of cor.
 At point of intersection, set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for closing cor. of secs. 5 and 6, marked on brass cap

Chains.

T9N R2W
 S32
 S 6 | S 5

CC
 T8N R2W
 1925

Raise mound of stone, 3 ft. base, 2 ft. high, S. of cor.

Land, mountainous.

Soil, sandy and rocky, 3rd rate.

Timber, none.

Undergrowth, palo verde, greasewood, cacti, ocotilla,
 and sage brush.

From the closing cor. of secs. 5 and 6, Cor. No. 1 of the
 Belle of the South patented mineral claim, Survey No.
 2196, brs S.63°58'W., 24.47 chs. dist.

FINAL TEST

Feb. 3, 1925: We examine the adjustments of transits No's 8478 and 8541, and find them correct; then to test the solar apparatus by comparing their indications, resulting from observations made during a.m. and p.m. hours with a meridian established by observation on Polaris, on Jan. 17, 1925, and described on page 3 hereof; We proceed as follows:

At 8h 0m a.m., l.m.t., We set off $34^{\circ}01'N.$ on the lat. arcs, $16^{\circ}29\frac{1}{2}'S.$ on the decl. arcs; and determine a meridian with the solars, which we find to agree with the true meridian.

At apparent noon, with the lat. arcs unchanged, we observe the sun on the meridian; the resulting reading of each decl. arc is $16^{\circ}28'S.$, which agrees with the computed decl. of the sun.

At 4h 0m, p.m., l.m.t., with the lat. arcs unchanged, we set off $16^{\circ}23\frac{1}{2}'S.$ on the decl. arcs and determine a meridian with each solar, which we find to agree with the meridian within $1\frac{1}{2}'$ of arc.

As all of the solar observations during the usual hours of solar work come within $1\frac{1}{2}'$ of the true meridian we conclude that the adjustments of the instruments were maintained in satisfactory adjustment, throughout the survey of this township.

BOUNDARIES OF T.8 N., R.2 W.

Latitudes, departures and closing errors.

Line designated	True bearing	Distance	Latitudes		Departures	
			N.	S.	E.	W.
South boundary	West	484.61				484.61
West boundary	North	475.08	475.08			
North boundary	East	484.48			484.48	
East boundary,	South	114.83		114.83		
	S. $0^{\circ}4'W$	39.97		39.97		.05
	S. $0^{\circ}9'W$	40.22		40.22		.11
	S. $0^{\circ}3'W$	79.68		79.68		.07
	South	200.00		200.00		
Convergency					.49	
<u>Totals.</u>			475.08	474.70	484.97	484.84
			474.70		484.84	
Error in latitude.			0.38			
Error in departure.					0.13	

GENERAL DESCRIPTION.

LAND: Very rough mountains in south two tiers of sections, becoming more rolling and lower in the northern portion.

SOIL: Sand, gravel and rock, 3rd and 4th rate.

UNDERGROWTH: Greasewood, sage brush, cacti, palo verde, ocotilla, cat claw, buck brush, oak brush, mesquite, juniper and scattering cottonwood along streams.

EVIDENCE OF MINERAL: We found many gold mines operating throughout the township, and at one time there has been a great deal of mining and development work done.

WATERING PLACES: Water is to be found in most of the main washes, throughout the township and in Castle creek. Buck Horn Springs in sec. 28, gives forth a good supply of fine water.

SETTLEMENT: Miners are scattered through the west and north portion of the township.

INDUSTRY: Mining seems to be the principal industry, although some grazing is done.