

3719

153

Book "I"  
4-079

BOOK 3719

# FIELD NOTES

OF THE SURVEY OF THE

North Boundary, and

Subdivision lines

of

TOWNSHIP 9 NORTH, RANGE 1 WEST.

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

## EXECUTED BY

Glenn F. Sawyer, U. S. Surveyor  
and

Wesson Cook, U. S. Transitman

In the capacity of U. S. Surveyors, under Special Instructions dated April 10, 1924,  
issued by the United States Surveyor General to govern surveys included in Group  
No. 129 Arizona, which were approved by the Commissioner of the General Land  
Office, April 29, 1924, and Assignment Instructions dated Nov. 25, 1924.

Survey commenced April 4, 1925

Survey completed April 29, 1925

3719

3719

3719


11A

Book "I"

Group 129 - - - Arizona.

BOOK 3719

INDEX DIAGRAM.

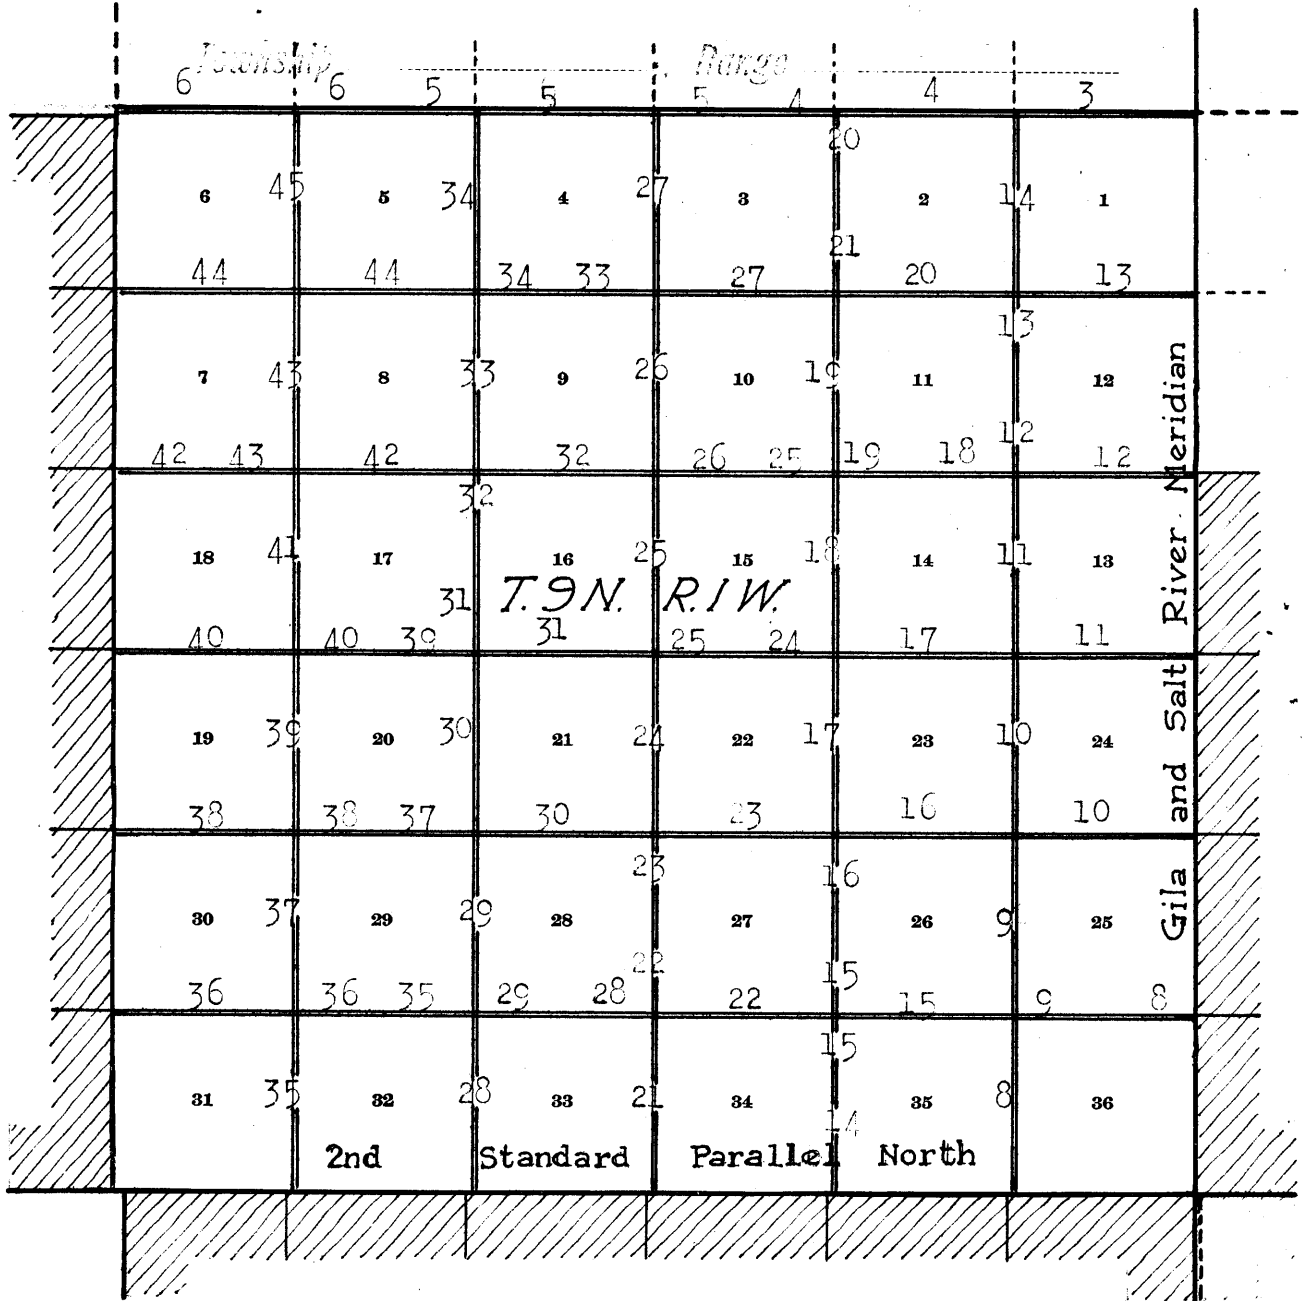


————— Surveyed under this group.

- - - - - Resurveyed under this group.

————— Accepted surveys.

- - - - - Unsurveyed.

 Areas surveyed as per accepted plats on file.

Book "I"  
 Group 129 - - - Arizona  
 Township 9 North, Range 1 West.

DATE DIAGRAM  
 1925.

4-5	4-5	4-27	4-26	4-18	4-17
6 4-28	4-28 5	4-26 4	4-26 3	4-25 2	4-17 1
7 4-20	4-20 8	4-24 4-18 4-17	4-24 4-17 4-24	4-19 4-14	4-16 4-11
16 4-13	4-14 4-16	4-18 4-17	4-17 4-13	4-14 4-15	4-11 4-15
19 4-11	4-13 4-10	4-16 4-9	4-9 4-13	4-14 4-9	4-11 4-10
30 4-8	4-10 4-7	4-10 4-6	4-9 4-8 4-9	4-9 4-8	4-10 4-7
31 4-7	4-8 32	4-7 4-7	4-6 4-6	4-8 34	4-7 35 26

Gila and Salt River Meridian.

2nd Standard Parallel North

- Surveyed by Glenn F. Sawyer, U.S. Surveyor, on dates shown thereon.
- Surveyed by Wesson Cook, U.S. Transitman, on dates shown thereon.
- Lines of accepted surveys or resurveys.

Surveys, herein described were executed on dates shown on diagram on page 1 hereof, by Glenn F. Sawyer, U. S. Surveyor and Wesson Cook, U. S. Transitman, using respectively, Young and Sons light mountain transits No's 8478 and 8541, each equipped with full vertical circle and Smith solar attachment; unless otherwise specified, all azimuth determinations are accomplished with the solar attachment.

April 3, 1925: We examine the adjustments of the transits and find them correct; then to test the solar apparatus by comparing their indications, resulting from observations made during a.m. and p.m. hours with a meridian established by Polaris observation, We proceed as follows:

At camp in the SW $\frac{1}{4}$  of sec. 31, T.10N., R.1 W., G. and S. R. Base and meridian, latitude  $34^{\circ}10'N.$ , longitude  $112^{\circ}24\frac{1}{2}'W.$ , at 6h 43.5m p.m., l.m.t., I, Wesson Cook with instrument No. 8541, observe Polaris at western elongation, making four observations, two each with the telescope in direct and reversed positions, and mark the mean point in line thus determined on a peg driven firmly in the ground, 10,00 chs. northerly.

Azimuth of Polaris at western elongation =  $1^{\circ}19'$

April 4, 1925: At 7h 45m a.m., l.m.t., I lay off the azimuth of Polaris  $1^{\circ}19'$  to the east and mark the meridian thus determined by a tack in a peg driven firmly in the ground, 10 chs. N.

At 8h 0m a.m., l.m.t., We set off  $34^{\circ}10'N.$  on the lat. arcs,  $5^{\circ}41'N.$  on the decl. arcs; and determine a meridian with the solar which we find to agree with the true meridian.

At apparent noon, with the lat. arcs unchanged, we observe the sun on the meridian; the resulting reading of each decl. arc is  $5^{\circ}44'N.$ , which agrees with the computed decl. of the sun.

At 4h 0m, p.m., l.m.t., with the lat. arcs unchanged, we set off  $5^{\circ}48'N.$  on the decl. arcs and determine a meridian with each solar, which we find to agree with the true meridian.

As all of the solar observations during the usual hours of solar work come within  $1'30''$  of the true meridian, we conclude that the adjustments of the instruments are satisfactory.


Unless otherwise specified, all measurements are made with Lufkin steel tapes, 5 chs. in length, compared with a Lufkin 1 ch. standard steel tape and found correct. The measurements are made on the slope, the vertical angle determined and the slope measurements properly reduced to true horizontal distances.

Survey of North bdy. of Township 9 North, Range 1 West. 3


Chains.

The cor. of Ts. 9 and 10 N., Rs. 1 E. and 1 W. on the Gila and Salt River Meridian, reestablished in 1913, by Sidney E. Blout, U.S.S. is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by four properly marked bearing trees, one each NE., SE., SW. and NW. of cor.

- 10.20 Thence, West, on true line, bet. secs. 1 and 36. Over mountainous land, thru. dense timber and undergrowth, on N. side of Horse Thief Canyon. Ascend over steep S. slope, to Gulch, course SE. to bottom of Horse Thief Canyon about 3 chs. dist.
- 23.70 Ascend 206 ft., over E. slope, to Rim of gulch, brs. NW. and SE.
- 24.80 Ascend 195 ft., over NE. slope to 1/4 sec. cor.
- 40.00 Leave dense pine timber, brs. N. and S., and enter scattering timber. Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bed rock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone around post, 4 ft. base, 2 1/2 ft. high, for 1/4 sec. cor. of secs. 1 and 36, marked on brass cap,



- 45.00 No bearing trees available. From this cor., Conical triangulation point, brs. S. 59° E. Ascend 275 ft., over NE. slope.
- 50.80 Enter dense jack pine timber, brs. NE. and SW. Trail, brs. NE. and S.
- 57.20 Spur, slopes N. Descend 75 ft., over NW. slope.
- 57.40 Trail, brs. N. and S.
- 64.80 Gulch, course N. 70° E. Ascend 108 ft., over NE. slope.
- 70.50 Spur, slopes N. Descend 133 ft., over NW. slope.
- 78.40 Head of gulch, course N. Ascend 37 ft., over NE. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 1, 2, 35 and 36, marked on brass cap,



- from which,
- A fir 22 ins. in diam., brs. N. 59° E., 59 lks. dist., marked T10N R1W S36 BT.
- A fir 8 ins. in diam., brs. S. 65° E., 61 lks. dist., marked T9N R1W S1 BT.
- A pine 8 ins. in diam., brs. S. 26 1/4° W., 9 lks. dist., marked T9N R1W S2 BT.
- A pine 8 ins. in diam., brs. N. 31° W., 6 lks. dist., marked T10N R1W S35 BT.

Land, mountainous. Soil, rocky and sandy, 3rd and 4th rate. Timber, fir, pine, oak, and juniper, . . . Undergrowth, manzanita, buck brush, mountain mahogany and scrub oak.

- 7.20 West, on true line, bet. secs. 2 and 35. Over mountainous land, thru. dense timber and undergrowth. Ascend 32 ft., over NE. slope. Ridge, brs. NW. and SE.

BOOK 3719

4 Survey of North bdy. of Township 9 North, Range 1 West.

Chains.

- 15.80 Descend 126 ft., over SW. slope.  
Gulch, course NW.
- 26.80 Ascend 161 ft., over NE. slope.  
Ridge, brs. N. 70° W. and S. 70° E.  
Descend 131 ft., over SW. slope.
- 32.00 Leave dense timber, brs. N. and S., and enter scattering  
timber.
- 33.20 Change to S. slope.  
Descend 22 ft., to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor. of secs. 2 and 35, marked on  
brass cap,

$\frac{1}{4}$  S 35  
S 2  
1925

- from which,
- A pine, 6 ins. in diam., brs. S. 24 $\frac{3}{4}$ ° E., 51 lks.  
dist., marked  $\frac{1}{4}$  S 2 BT.
- A pine, 6 ins. in diam., brs. N. 67° W., 10 lks.  
dist., marked  $\frac{1}{4}$  S 35 BT.

- Continue along S. slope.
- 42.50 Descend slightly to  
Spur, slopes SW.
- 54.00 Descend 321 ft., over W. slope.  
A pine, 20 ins. in diam., on line, marked with 2 notches on  
each of E. and W. faces.
- 55.00 Change to NW. slope.  
Descend 237 ft. to
- 66.10 Draw, course S. 80° W.
- 80.00 Descend 243 ft., over SW. slope, to  
Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in  
the ground, for cor. of secs. 2, 3, 34 and 35, marked on  
marked cap,

T10N | R1W  
S34 | S35  
S 3 | S 2  
T9N  
1925

- from which,
- A juniper, 8 ins. in diam., brs. N. 19° 54' E., 135  
lks. dist., marked T10N R1W S35 BT.
- A juniper, 6 ins. in diam., brs. S. 73° W., 131  
lks. dist., marked T9N R1W S3 BT.
- A juniper, 6 ins. in diam., brs. N. 21° 17' W., 184  
lks. dist., marked T10N R1W S34 BT.

No other bearing trees available.  
Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, pine, oak, fir and juniper.  
Undergrowth, scrub oak brush, manzanita, mountain mahog-  
any, and buck brush.

- West, on true line, bet. secs. 3 and 34.  
Over mountainous land, thru. dense undergrowth.
- 7.20 Descend 34 ft., over S. slope, to  
Spur, slopes SW.
- 10.90 Descend 756 ft., over NW. slope.
- 37.00 Trail, brs. NE. and SW.
- 39.70 Creek, with water in pools, course S. 70° W.,  
Descend 72 ft., over SW. slope, to  
Draw, course S.
- 40.00 Ascend slightly over SE. slope, to  
Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in  
the ground for  $\frac{1}{4}$  sec. cor. of secs. 3 and 34, marked on  
brass cap,

$\frac{1}{4}$  S 34  
S 3  
1925

Survey of the North boundary of Township 9 North, Range 1 West. 5

Chains. No bearing trees available.  
 Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.  
 Ascend 42 ft., over SE. slope.  
 52.90 Point of spur, slopes S.  
 Descend 167 ft., over SW. slope.  
 66.70 Gulch, course S. Asc. 198 ft., over SE. slope.  
 73.30 Spur, slopes SW. from N. Desc. 333 ft., over NW. slope, to  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the  
 ground, for cor. of secs. 3, 4, 33 and 34, marked on brass  
 cap,

T10N | R1W  
 S34 | S33  
 ---  
 S 4 | S 3  
 T9N  
 1925

No bearing trees available. Raise a mound of stone, 3 ft.  
 base, 1 1/2 ft. high, W. of cor.  
 Land, mountainous.  
 Soil, rocky, 3th rate.  
 Timber, none.  
 Undergrowth, mountain mahogany, buck brush, laurel, and man-  
 zanita, and scrub oak.

-----  
 West, on true line, bet. secs. 4 and 33.  
 Over mountainous land, thru. dense undergrowth.  
 Descend 376 ft., over NW. slope.  
 21.10 Humbug Creek, containing a stream of water, 20 lks. wide, 6  
 ins. deep, course S.  
 Ascend 413 ft., over SE. slope.  
 22.80 Old road, brs. NE. and SW.  
 38.30 Ridge, brs. NE. and SW. Desc. 29 ft., over W. slope, to  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the  
 ground, for 1/4 sec. cor. of secs. 4 and 33, marked on brass  
 cap,

1/4 S 33  
 S 4  
 1925

No bearing trees available.  
 Descend 273 ft., over W. slope.  
 49.60 Draw, course S. Ascend 244 ft., over E. slope.  
 60.60 Spur, slopes SE. Desc. 169 ft., over SW. slope.  
 64.70 Draw, course S. Asc. 91 ft., over SE. slope.  
 67.20 Point of spur, slopes S.  
 Descend 126 ft., over SW. slope.  
 70.90 Draw, course SE.  
 Ascend 200 ft., over E. slope.  
 79.90 Ridge, brs. N. and S.  
 Descend slightly over SW. slope, to  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the  
 ground, for cor. of secs. 4, 5, 32 and 33, marked on brass  
 cap,

T10N | R1W  
 S32 | S33  
 ---  
 S 5 | S 4  
 T9N  
 1925

No bearing trees available.  
 Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
 Land, mountainous.  
 Soil, sandy and rocky, 3rd and 4th rate.  
 Timber, none.  
 Undergrowth, scrub oak, laurel, mountain mahogany, manzanita,  
 buck brush and catclaw.

-----  
 West, on true line, bet. secs. 5 and 32.  
 Over mountainous land, thru. very scattering timber and dense  
 undergrowth. Desc. 86 ft., over SW. slope, to  
 4.20 Head of draw, course SW. Descend along S. slope, to  
 8.60 Point of spur, slopes SW.

6 Survey of North boundary of Township 9 North, Range 1 West.

Chains.

18.40 Descend 242 ft., over W. slope.  
 37.40 Gulch, course S.10°E. Asc. 287 ft., over E. slope.  
 40.00 Spur, slopes SE. Desc. 124 ft., over SW. slope, to  
 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor. of secs. 5 and 32, marked on brass  
 cap,

$\frac{1}{4}$  S 32  
 S 5  
 1925

from which,

An oak, 6 ins. in diam., brs. S.45°W., 88 lks.  
 dist., marked  $\frac{1}{4}$  S 5 BT.

An oak, 6 ins. in diam., brs. N.55°W., 48 lks.  
 dist., marked  $\frac{1}{4}$  S 32 BT.

40.40 Descend slightly over SW. slope.  
 63.20 Gulch, course SE. Asc. 391 ft., over SE. slope.  
 72.90 Spur, slopes S.10°W. Desc. 229 ft., over W. slope.  
 Main wash, 80 lks. wide, in gulch, course SE.  
 80.00 Ascend 90 ft., over E. slope, to  
 Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the  
 ground to bed rock, deposit a stone marked with a cross  
 (x) at base of post, and raise a mound of stone, 4 ft. base,  
 2 ft. high, around post, for cor. of secs. 5, 6, 31 and 32,  
 marked on brass cap,

T10N R1W  
 S31 | S32  
 S 6 | S 5  
 T9N  
 1925

No bearing trees available.  
 Land, mountainous.  
 Soil, sandy, 3rd rate. Timber, oak and juniper.  
 Undergrowth, manzanita, scrub oak, mountain mahogany and laurel.

36.10 West, on true line, bet. secs. 6 and 31.  
 39.20 Over mountainous land, thru. dense undergrowth.  
 40.00 Ascend 548 ft., over broken E. slope.  
 Spur, slopes SE. Desc. 87 ft., over SW. slope.  
 Head of gulch, course S. Asc. 25 ft., over SE. slope, to  
 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor. of secs. 6 and 31, marked on brass  
 cap,

$\frac{1}{4}$  S 31  
 S 6  
 1925

No bearing trees available. Raise a mound of stone, 3 ft.  
 base, 2 ft. high, N. of cor.

50.30 Ascend 211 ft., over broken E. slope.  
 55.00 Old uncompleted Prescott-Phoenix highway, brs. NE. and SW.  
 Spur, slopes S. from peak, the top of which brs. N. about 10  
 chs. dist. Desc. 326 ft., over NW. slope.  
 72.50 Gulch, course N. Asc. 90 ft., over E. slope.  
 76.70 Spur, slopes N. Desc. 68 ft., over NW. slope, to  
 79.55 Intersect N. and S. line at a point 1.42 chs. N. of the origin-  
 al cor. of Ts. 9 and 10 N., Rs. 1 and 2 W., which is an  
 iron post, 3 ins. in diam., projecting 12 ins. above  
 ground, firmly set, properly marked on brass cap for ref-  
 erence to said Townships, and witnessed by a mound of stone  
 S. of cor. No bearing trees.

Alter this cor. monument to refer to Ts. 9 and 10 N., R. 2 W.  
 only, by changing marking on brass cap to read:

T10N  
 R2 W |  
 S36 |  
 S 1 |  
 T9N  
 1919-25

Destroy old mound of stone S. of cor., and raise a new mound  
 of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor.

At point of intersection of the N. bdy. of T. 9 N., R. 1 W.,  
 with N. and S. line thru. above described cor., set an iron



Survey of North boundary of Township 9 North, Range 1 West.

Chains.


post 3 ft. long, 3 ins. in diam., 27 ins. in the ground for cor. of Ts. 9 and 10 N., R. 1W: only, marked on brass cap,



1925

No bearing trees available.  
Raise a mound of stone, 2 ft. base, 1½ ft. high, E. of cor.

Land, mountainous.  
Soil, sandy and rocky, 3rd rate.  
Timber, none.  
Undergrowth, scrub oak, manzanita, mahogany and laurel.



Chains.

The original standard cor. of secs. 35 and 36, on the S. bdy. of the Tp. (2nd. Std. Parallel N.) is a granite stone, 24x14x9 ins., firmly set in a mound of stone, marked with 5 notches on W. face, and 1 notch on E. face, and SC on N. face, and witnessed by a mound of stone, 3 ft. base, 2 ft. high, N. of cor. No bearing trees.

Thence,

N. 0° 1' W., bet. secs. 35 and 36.

Over mountainous land, thru. scattering undergrowth.

Ascend 205 ft., over S. slope.

7.30 Ridge, brs. NE. and SW.

Descend 188 ft., over NW. slope, to

22.00 Change to NE. slope. Desc. 405 ft.

33.50 Gulch, course N. 70° W. Asc. 173 ft., over SW. slope.

38.70 Spur, slopes NW. Desc. 26 ft., over N. slope, to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bed rock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone around post, 4 ft. base, 1½ ft. high, for ¼ sec. cor., marked on brass cap,

	†	
S35		S36

1925

No bearing trees available.

Descend 206 ft., over steep N. slope, to

46.50 Change to NW. slope. Desc. 120 ft.

53.40 Humbug Creek, with water in places, in gulch, course SW.

Ascend 490 ft., over S. slope.

76.90 Point of spur, slopes SE. Desc. 60 ft., over NE. slope, to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground, to bed rock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone around post, 3 ft. base, 16 ins. high, for cor. of secs. 25, 26, 35 and 36, marked on brass cap,

T9N		R1W
S26		S25

S35		S36
-----	--	-----

1925

No bearing trees available.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, none.

Undergrowth, ocotillo, buck brush, catclaw, cacti, sage brush and scrub mesquite.

-----  
East, on random line, bet. secs. 25 and 36.

40.00 Set temp. ¼ sec. cor.

79.96 Intersect the E. bdy. of the Tp., 25 lks. N. of the reestablished cor. of secs. 25, 30, 31 and 36, which is an iron post, 3 ins. in diam., projecting 16 ins. above ground, firmly set, properly marked on brass cap, and witnessed by a mound of stone, W. of cor. No bearing trees.

Thence,

N. 89° 49' W., on true line, bet. secs. 25 and 36.

Over mountainous land, thru. scattering undergrowth.

Ascend 201 ft., over SE. slope.

9.00 Spur, slopes SW.

Descend 360 ft., over W. slope.

Survey of the Subdivisions of T9N, R1W.

Chains.

19.95 Head of draw, course S.20°W.; asc. 35 ft. over SE.slope.  
 22.35 Spur, slopes SW.; desc. 281 ft. over W. slope.  
 30.10 Draw, course S.70°W.; asc. 74 ft. over SE. slope.  
 39.95 Spur, slopes SW.  
 39.98 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in

the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 4 ft. base, 22 ins. high, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$  S25  
 S36  
 1925

Desc. 128 ft. over W. slope.  
 44.60 Draw, course SW.; asc. 30 ft. over SE. slope.  
 48.00 Spur, slopes SW.; desc. 311 ft. over NW. slope.  
 71.70 Humbug creek, cry, course S.; asc. 252 ft. over NE. slope.  
 79.96 The cor. of secs. 25,26,35, and 36.

Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, none.  
 Undergrowth, ocotilla, buck brush, sage brush, cacti, and mesquite.

N.0°1'W., bet. secs. 25 and 26.  
 Over mountainous land, through scattering undergrowth.  
 Desc. 25 ft. over NE. slope.

2.00 Head of draw, course E.; asc. 116 ft. over SE. slope.  
 4.90 Spur, slopes E.; desc. 319 ft. over NE. slope.  
 25.10 Humbug creek, water in places and pools, course SE.; asc. 141 ft. over SW. slope.  
 28.90 Point of spur, slopes SW.; desc. 70 ft. over NW. slope.  
 38.00 E. edge of bend in Humbug creek, course S.20°W., from NW.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$   
 S26 | S25  
 1925

Raise mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor.  
 Asc. 362 ft. over SW. slope.

52.20 Spur, slopes SW.; desc. 243 ft. over NW. slope.  
 72.60 Draw, course SW.; asc. 189 ft. over SW. slope.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 23,24,25, and 26, marked on brass cap

T9N, R1W  
 S23 | S24  
 S26 | S25

1925

Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, none.  
 Undergrowth, mesquite, buck brush, cacti.

Chains.

40.00 S.89°49'E., on random line bet. secs. 24 and 25.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.92 Intersect G. & S. R. Meridian, 12 lks. S. of the cor.  
 of secs. 19, 24, 25, and 30, which is an iron post, 3 ins.  
 in diam., 12 ins. above ground, firmly set, properly  
 marked on brass cap and witnessed by mound of stone W.  
 of cor. No bearing trees.

Thence

N.89°54'W., on true line bet. secs. 24 and 25.  
 Over rough mountains, through heavy undergrowth.  
 Desc. 689 ft. over SW. slope.  
 17.60 Draw, course N.80°W.; asc. 51 ft. over NE. slope.  
 21.40 Spur, slopes N.; desc. 180 ft. over NW. slope.  
 30.00 Swale slopes N.; asc. 161 ft. over NE. slope.  
 36.50 Spur, slopes N.; desc. 60 ft. over NW. slope.  
 39.96 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
 the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$  S24  
 S25  
 1925

Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.  
 Desc. 687 ft. over NW. slope.

63.70 Enter draw, course SW.  
 69.00 Leave draw, course SW.; asc. 159 ft. over SE. slope.  
 73.60 Spur, slopes S.10°W.; desc. 90 ft. over SW. slope.

79.92 The cor. of secs. 23, 24, 25, and 26.

Land, mountainous.  
 Soil, sandy and rocky, 3rd and 4th rate.  
 Timber, none.  
 Undergrowth, laurel, mahogany, and oak.

N.0°1'W., bet. secs. 23 and 24.  
 Over mountainous land, through scattering undergrowth.  
 Asc. 136 ft. over SW. slope.  
 10.50 Spur, slopes SW.; desc. 93 ft. over NW. slope.  
 13.50 Draw, course S.70°W.; asc. 328 ft. over SW. slope.  
 24.10 Spur, slopes SW.; thence along W. slope.  
 29.10 Spur, slopes W.; desc. 101 ft. over NW. slope.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in  
 the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$   
 S23 | S24  
 1925

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
 Desc. 30 ft. over NW. slope.  
 40.90 Draw, course W.; asc. 80 ft. over W. slope.  
 45.00 Spur, slopes W.; desc. 143 ft. over N. slope.  
 49.90 Draw, course W.; asc. 105 ft. over steep SW. slope.  
 52.10 Point of spur, slopes SW.; desc. 20 ft. over NW. slope.  
 54.00 Draw, course SW.; asc. 398 ft. over S. slope.  
 63.40 Spur, slopes SW.; desc. 133 ft. over NW. slope.  
 78.50 Draw, course SW.; asc. 40 ft. over S. slope.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in  
 the ground, for cor. of secs. 13, 14, 23, and 24, marked  
 on brass cap

T9N R1W  
 S14 | S13  
 S23 | S24  
 1925

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.


Survey of the Subdivisions of T9N, R1W.

Chains.

Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, none.  
Undergrowth, buck brush, mahogany, and cacti.

40.00 S.89°54'E., on random line bet. secs. 13 and 24.  
Set temp. 1/4 sec. cor.  
79.86 Intersect G. and S. R. Meridian, 16 lks. N. of the cor. of secs. 13, 18, 19, and 24, which is an iron post, 3 ins. in diam., firmly set, properly marked on brass cap and witnessed by mound of stone W. of cor. No bearing trees.


Thence  
N.89°47'W., on true line bet. secs. 13 and 24.  
Over mountainous land, through dense undergrowth.  
Desc. 40 ft. over W. slope.  
1.15 Draw, course S.; asc. 40 ft. over SE. slope.  
5.15 Slope changes to S.; thence along same.  
9.15 Spur, slopes SW1; desc. 751 ft. over W. slope.  
33.50 Draw, course SW.; asc. 130 ft. over SE. slope.  
39.93 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 3 ft. base, 2 ft. high, for 1/4 sec. cor., marked on brass cap



43185 Asc. 111 ft. over SE. slope.  
75.00 Spur, slopes S.; desc. 1028 ft. over W. slope.  
79.86 Draw, course S.70°W.; asc. slightly along S. slope.  
The cor. of secs. 13, 14, 23, and 24.

Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, none.  
Undergrowth, oak brush, laurel, and mahogany.

14.60 N.0°1'W., bet. secs. 13 and 14.  
29.70 Over rough mountains, through scattering timber and undergrowth.  
40.00 Asc. 501 ft. over S. slope.  
Spur, slopes SW.; desc. 84 ft. over NW. slope.  
Draw, course SW.; asc. 409 ft. over S. slope.  
Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 3 ft. base, 16 ins. high, for 1/4 sec. cor., marked on brass cap



66.20 No bearing trees available.  
80.00 Asc. 599 ft. over S. slope. of spur, sloping S.  
Ridge, brs NW. and SE.; thence along E. slope.  
Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bed rock, and raise a mound of stone around post, 4 ft. base, 2 ft. high, for cor. of secs. 11, 12, 13, and 14, marked on brass cap.

Chains.

T9N R1W
S11   S12
S14   S13

1925

from which

A juniper, 6 ins. diam., brs N.52 $\frac{1}{2}$ °E., 237 lks. dist., marked T9N R1W S12 BT.A juniper, 10 ins. in diam., brs S.84 $\frac{1}{2}$ °W., 182 lks. dist., marked T9N R1W S14 BT.

A juniper, 8 ins. diam., brs N.40°W., 196 lks. dist., marked T9N R1W S11 BT.

No other bearing tree available.

Land, rough mountains.

Soil, rocky, 4th rate.

Timber, scattering juniper.

Undergrowth, mahogany, oak, and manzanita.

S.89°47'E., on random line bet. secs. 12 and 13

40.00 Set temp.  $\frac{1}{4}$  sec. cor.79.80 Intersect Grand S. R. Meridian, 40 lks. S. of the cor. of secs. 7, 12, 13, and 18, which is an iron post, 3 ins. in diam., firmly set, properly marked on brass cap, and witnessed by mound of stone, 3 ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor.

Thence

S.89°56'W., on true line bet. secs. 12 and 13.

Over mountainous land, through dense undergrowth.

Desc. 66 ft. over SE. slope.

22.65 Spur, slopes S.; desc. 145 ft. over SW. slope.

38.20 Draw, course S.10°E.; asc. 44 ft. over E. slope.

39.90 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$ S12
S13

1925

Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Asc. 135 ft. over E. slope.

50.30 Ridge, brs N. and S.10°E.; desc. 108 ft. over W. slope.

63.30 Draw, course S.20°W.; thence along S. slope.

76.80 Creek, dry, course S.20°E.; asc. 57 ft. over E. slope.

79.80 The cor. of secs. 11, 12, 13, and 14.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, none.

Undergrowth, oak brush, mahogany, and manzanita.

N.0°1'W., bet. secs. 11 and 12.

Over mountainous land, through dense undergrowth, and scattering timber,.

Along E. slope.

10.10 Slope changes to NE.; desc. 42 ft.

23.30 Draw, course S.20°E.; asc. 246 ft. over SW. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone 3 ft. base, 1 $\frac{1}{2}$  ft. high, around post, for  $\frac{1}{4}$  sec. cor. marked on brass cap.

$\frac{1}{4}$
S11   S12

1925

Survey of the Subdivisions of T9N, R1W.

Chains.

42.50 Asc. 215 ft. over SW. slope.  
 Trail, brs NW. and SE.  
 48.90 Spring brs West, about 50 lks. dist.  
 51.20 Trail, brs NE. and SW.  
 55.70 Ridge, brs N.70°E. and S.70°W.; desc. 73 ft. over NW. slope.  
 68.90 Draw, course SW.; asc. 291 ft. over S. slope.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 3 ft. base, 16 ins. high, for cor. of secs. 1, 2, 11, and 12, marked on brass cap.

T9N	R1W
S 2	S 1
S11	S12

1925

from which  
 A juniper, 6 ins. in diam., brs N.33½°E., 91 lks. dist., marked T9N R1W S1 BT.  
 A juniper, 8 ins. diam., brs N.65½°W., 75 lks. dist., marked T9N R1W S2 BT.  
 No other trees available.

Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, scattering juniper.  
 Undergrowth, oak brush, mahogany, manzanita, and laurel.

40.00 N.89°56'E., on random line bet. secs. 1 and 12.  
 79.84 Set temp. ¼ sec. cor.  
 Intersect ~~to~~ and ~~S~~ R. Meridian, 2 lks. S. of the cor. of secs. 1, 6, 7, and 12, which is an iron post, 3 ins. in diam., firmly set, properly marked on brass cap, and witnessed by mound of stone W. of cor.

Thence  
 S.89°55'W. on true line bet. secs. 1 and 12.  
 Over mountainous land, through dense undergrowth.  
 Desc. 229 ft. over W. slope.  
 9.35 Draw, course SW.; asc. 50 ft. over SE slope.  
 15.45 Spur, slopes SW.; desc. 288 ft. over SW. slope.  
 32.45 Creek, dry, course S.; asc. 131 ft. over SE. slope.  
 39.92 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 4 ft. base, 2 ft. high, for ¼ sec. cor., marked on brass cap

¼ S 1
S12

1925

57.15 Asc. 289 ft. over SE. slope.  
 Trail, brs NE. and SW.  
 62.35 Ridge, brs N. and SW.; desc. 268 ft. over SW. slope.  
 75.85 Draw, course S.20°W.; asc. 99 ft. over SE. slope.  
 78.80 Slope changes to S.; thence along same.  
 79.84 The cor. of secs. 1, 2, 11, and 12.

Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, very scattered juniper.  
 Undergrowth, oak brush, manzanita, and mahogany.

Chains.

- North, on random line bet. secs. 1 and 2.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 82.57 Intersect the N. bdy. of the tp., 15 lks. E. of the cor. of secs. 1, 2, 35, and 36, hereinbefore described.
- Thence  
 S.0°6'E. on true line bet. secs. 1 and 2.  
 Over mountainous land, through dense brush and scattering timber.  
 Asc. 75 ft. over N. slope.  
 4.07 Main top of Bradshaw mountains, brs E. and W.; desc. 647 ft. over S. slope.  
 27.37 Gulch, course SW.; then along gradual W. slope.  
 42.57 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap
- $\frac{1}{4}$   
 S 2 | S 1  
 1925
- from which  
 A pine, 8 ins. diam., brs N.66°E., 62 lks. dist, marked  $\frac{1}{4}$  S1 BT.  
 A pine, 10 ins. in diam., brs N.55 $\frac{1}{2}$ °W., 47 lks. dist., marked  $\frac{1}{4}$  S2 BT.  
 Desc. 30 ft. over SW. slope.  
 46.77 Draw, course SW.; asc. 30 ft. over NW. slope.  
 55.57 Slope changes to NW.  
 57.57 Slope changes to SW.; desc. 340 ft. over S. slope.  
 63.57 Head of draw, course S.60°W.; continue desc.  
 79.57 Spur, slopes S.20°W.
- 82.57 The cor. of secs. 1, 2, 11, and 12.

Land, mountainous.  
 Soil, rocky and sandy, 3rd and 4th rate.  
 Timber, pine, juniper and oak.  
 Undergrowth, oak brush, manzanita, buck brush, laurel, and mahogany.

- The standard cor. of secs. 34 and 35, on S. bdy. of Tp. (2nd. Std. Par. N.) is an iron post, 3 ins. in diam., firmly set, properly marked on brass cap and witnessed by a mound of stone N. of cor. No bearing trees.
- Thence,  
 N.0°1'W., bet. secs. 34 and 35.  
 Over mountainous land, through scattering undergrowth.  
 Asc. 66 ft. over SE. slope.  
 5.00 Ridge, brs NW. and SE.; desc. 203 ft. over N. slope.  
 18.70 Draw, course N.20°E.; asc. 78 ft. over SE. slope.  
 21.30 Spur, slopes E.; desc. 123 ft. over N. slope.  
 24.95 Draw, course NE.; asc. 46 ft. over SE. slope.  
 27.30 Spur, slopes SE.; desc. 95 ft. over NE. slope.  
 29.05 Draw, course E.; asc. 216 ft. over SE. slope.  
 35.50 Spur, slopes E.; desc. 65 ft. over NE. slope.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 4 ft. base, 26 ins. high, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$   
 S34 | S35  
 1925

Desc. 212 ft. over NE. slope.



Survey of the Subdivisions of T9N, R1W.

Chains.

- 51.25 Sand creek, standing water in pools, course SE.; asc. 349 ft. over S. slope.
- 61.35 Spur, slopes SW.; desc. 99 ft. over NW. slope.
- 64.35 Draw, course W.; asc. 204 ft. over SW. slope.
- 71.00 Spur, slopes S.70°W.; desc. 47 ft. over NW. slope.
- 74.00 Draw, course S.80°W.; asc. 150 ft. over SW. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 26, 27, 34, and 35, marked on brass cap

T9N R1W  
 S27 | S26  
 S34 | S35

1925

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, none.  
 Undergrowth, buck brush, sage brush, ocotilla, and cacti.

- 40.00 East, on random line bet. secs. 26 and 35.
- 79.88 Set temp. 1/4 sec. cor.
- 79.88 Intersect the N. and S. line, 5 lks. N. of the cor. of secs. 25, 26, 35, and 36.

Thence  
 N.89°58'W., on true line bet. secs. 26 and 35.  
 Over mountainous land, through scattering undergrowth.  
 Asc. 248 ft. over E. slope.

- 5.30 Spur, slopes S.10°E.; desc. 51 ft. over SW. slope.
- 9.80 Head of draw, course S.; asc. 170 ft. over SE. slope.
- 17.20 High spur, slopes S.20°W.; desc. 227 ft. over SW. slope.
- 24.40 Head of draw, course SW.; asc. 108 ft. over SE. slope.
- 31.00 Spur, slopes S.60°W.; desc. 250 ft. over precipitous W. slope.
- 36.60 Draw, course S.20°E.; asc. 150 ft. over steep, E. slope.
- 39.94 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 4 ft. base, 22 ins. high, for 1/4 sec. cor., marked on brass cap

1/4 S26  
 S35  
 1925

Asc. 530 ft. over E. slope.

- 45.50 Slope changes to NE.
- 57.00 Slope changes to E.
- 64.70 Ridge, brs NW. and SE.; desc. 134 ft. over SW. slope.
- 69.50 Head of draw, course S.70°W.; thence along S. slope.
- 76.70 Slope changes to SW.; desc. 31 ft.
- 79.88 The cor. of secs. 26, 27, 34, and 35.

Land, mountainous.  
 Soil, rocky and sandy, 3rd and 4th rate.  
 Timber, none.  
 Undergrowth, buck brush, sage brush, ocotilla, cacti, and mesquite.

- 8.50 N.0°1'W., bet. secs. 26 and 27.  
 Over mountainous land, through scattering undergrowth.  
 Asc. 127 ft. over SW. slope.  
 Spur, slopes SW.; desc. 224 ft. over NW. slope.

Chains.

- 25.30 Low saddle in ridge, brs NW. and SE.; asc. 217 ft. over SE. slope.
- 27.60 Trail from Humbug creek to Sand creek, brs NE. and SW respectively.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post; and raise a mound of stone around post, 3 ft. base, 2 ft. high, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$   
S27 | S26

1925

- Asc. 41 ft. over SE. slope.
- 42.62 Spur, slopes E.; desc. 58 ft. over NE. slope.
- 46.60 Draw, course E.; asc. 323 ft. over SE. slope.
- 73.00 Slope changes to E.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 3 ft. base, 16 ins. high, for cor. of secs. 26, 27, 34, and 35, marked on brass cap

T9N R1W  
S27 | S26  

---

S34 | S35

1925

Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, none.  
Undergrowth, mesquite, buck brush, and cacti.

- S.89°58'E., on random line bet. secs. 23 and 26.
- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
- 79.90 Intersect the N. and S. line, 4 lks. S. of the cor. of secs. 23, 24, 25, and 26,

Thence  
West, on true line bet. secs. 23 and 26.  
Over mountainous land, through scattering undergrowth.  
Desc. 288 ft. over SW. slope.

- 14.60 Humbug creek, 20 lks. wide, 1 ft. deep, course S.30°E.
- Asc. 592 ft. over NE. slope.
- 39.95 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post; and raise a mound of stone around post, 3 ft. base, 22 ins. high, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$  S23  
S26  
1925


- Asc. 426 ft. over SE. slope.
- 69.90 Ridge, brs NW. and SE.; desc. 202 ft. over W. slope.
- 78.20 Draw, course SE.; asc. 29 ft. over E. slope.
- 79.90 The cor. of secs. 22, 23, 26, and 27.

Land, mountainous.  
Soil, sandy and rocky, 3rd and 4th rate.  
Timber, none.  
Undergrowth, mesquite, buck brush, sage brush, cacti, and ocotilla

Survey of the Subdivisions of T9N, R1W.

Chains.


N.0°1'W., bet. secs. 22 and 23.  
 Over mountainous land, through scattering undergrowth:  
 Asc. 330 ft. over SE. slope.  
 13.80 Head of draw, course S.10°E.  
 16.70 Trail, brs NW. and SE.  
 18.80 Ridge, brs NW. and SE.; desc. 100 ft. over NE. slope.  
 24.80 Head of draw, course E.; asc. 43 ft. over SE. slope.  
 29.00 Spur, slopes N.60°E.; desc. 355 ft. over N. slope.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in  
 the ground to bed rock, deposit a stone marked with a  
 cross (+) at base of post, and raise a mound of stone  
 3 ft. base, 16 ins. high, around post, for 1/4 sec. cor.,  
 marked on brass cap



1925

59.40 Desc. 389 ft. over NW. slope.  
 Humbug creek, 15 lks. wide, 10 ins. deep, course S.70°E.;  
 Asc. 447 ft. over S. slope.  
 68.96 U.S.L.M. No. 3771 brs. S.85°33'W.

69.00 Slope changes to SW.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins.  
 in the ground to bed rock, deposit a stone marked with  
 a cross (+) at base of post, and raise a mound of stone  
 around post, 4 ft. base, 2 ft. high, for cor. of secs.  
 14, 15, 22, and 23, marked on brass cap




1925

Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, none.  
 Undergrowth, manzanita, cacti, laurel.

40.00 East, on random line bet. secs. 14 and 23.  
 Set temp. 1/4 sec. cor.  
 79.86 Intersect the N. and S. line, 26 lks. S. of the cor. of  
 secs. 13, 14, 23, and 24.

Thence  
 S.89°49'W., on true line bet. secs. 14 and 23.  
 Over rough mountains, through scattering undergrowth.  
 Asc. 244 ft. over SE. slope.

13.85 Spur, slopes SW.; desc. 262 ft. over SW. slope.  
 25.35 Draw, course SW.; asc. 60 ft. over E. slope.  
 26.85 Spur, slopes SW.; desc. 245 ft. over W. slope.  
 31.85 Draw, course SW.; asc. 45 ft. over SE. slope.  
 37.00 Spur, slopes SW.; desc. 60 ft. over SW. slope.  
 39.93 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
 the ground, for 1/4 sec. cor., marked on brass cap



1925

Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.  
 Desc. 163 ft. over W. slope.  
 44.25 Draw, course SW.; asc. 63 ft. over SE. slope.  
 47.45 Spur, slopes SW.; desc. 150 ft. over SW. slope.  
 55.85 Draw, course S.; asc. 191 ft. over E. slope.  
 61.65 Spur, slopes S.; desc. 107 ft. over W. slope.

Chains.

66.35 Draw, course S.20°W.; asc. 173 ft. over SE. slope.  
 79.86 The cor. of secs. 14, 15, 22, and 23.

Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, none.  
 Undergrowth, laurel, oak, manzanita, mahogany, and cacti.

N.0°1'W., bet. secs. 14 and 15.  
 Over mountainous land, through scattering undergrowth.  
 Asc. 54 ft. over S. slope.  
 1.01 U.S.L.M. No. 3771, brs S.71°9'W.  
 2.50 Slope changes to W.  
 18.00 Slope changes to SW.; asc. 246 ft.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in  
 the ground to bed rock, deposit a stone marked with a  
 cross (+) at base of post, and raise a mound of stone  
 around post, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$   
 S15 | S14

1925

Asc. 180 ft. over SW. slope.  
 49.00 Spur, slopes SW.; desc. 180 ft. over NW. slope.  
 59.80 Draw, course W.; asc. 156 ft. over SW. slope.  
 65.40 Spur, slopes SW.; thence along W. slope.  
 68.70 Slope changes to NW.; desc. 46 ft.  
 71.30 Draw, course SW.; asc. 272 ft. over SW. slope.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in  
 the ground to bed rock, deposit a stone marked with a  
 cross (+) at base of post, and raise a mound of stone  
 around post, 3 ft. base,  $1\frac{1}{2}$  ft. high, for cor. of secs.  
 10, 11, 14, and 15, marked on brass cap

T9N R1W  
 S10 | S11  
 S15 | S14

1925

Land, rough mountains.  
 Soil, rocky, 4th rate.  
 Timber, none.  
 Undergrowth, oak brush, laurel, mahogany, and catclaw.

40.00 N.89°49'E., on random line bet. secs. 11 and 14.  
 79.80 Set temp.  $\frac{1}{4}$  sec. cor.  
 Intersect the N. and S. line, 46 lks. N. of the cor. of  
 secs. 11, 12, 13, and 14.

Thence  
 N.89°51'W., on true line bet. secs. 11 and 14.  
 Over rough mountains, through heavy undergrowth.  
 Asc. 273 ft. over NE. slope.  
 16.40 Ridge, brs N.20°W. and S.20°E.; desc. 720 ft. over W. slope  
 34.60 Draw, course S.30°W.; asc. 98 ft. over SE. slope.  
 39.90 True point for  $\frac{1}{4}$  sec. cor. falls on rocky slope, where it is  
 impracticable to set monument; therefore, at  
 40.96 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in  
 the ground to bed rock, deposit a stone marked with a  
 cross (+) at base of post, and raise a mound of stone  
 3 ft. base, 2 ft. high, around post, for witness cor. to  
 sec. cor., marked on brass cap,

Survey of the Subdivisions of T9N, R1W.

Chains

1/4 S11 WC  
S14  
1925

- Asc. 25 ft. over SE. slope.
- 41.40 Spur, slopes S.20°W.; desc. 492 ft. over W. slope.
- 52.20 Draw, course S.30°W.; asc. 191 ft. over SE. slope.
- 58.00 Spur, slopes SW.; desc. 221 ft. over W. slope.
- 65.40 Head of draw, course SW.; then along S. slope.
- 72.00 Desc. 84 ft. over SW. slope.
- 79.80 The cor. of secs. 10, 11, 14, and 15.

Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, none.  
 Undergrowth, mahogany, laurel, oak, and cacti.

N.0°1'W., bet. secs. 10 and 11.  
 Over mountainous land, through heavy undergrowth.  
 Asc. 35 ft. over S. slope.

- 1.80 Spur, slopes SW.; desc. 134 ft. over NW. slope.
- 14.30 Draw, course W.; asc. 147 ft. over SW. slope.
- 21.30 Spur, slopes W.; desc. 234 ft. over NW. slope.
- 26.90 Draw, course W.; asc. 98 ft. over SW. slope.
- 34.80 Trail, brs NW. and SE.
- 36.30 Draw, course SW.; asc. 68 ft. over SW. slope.
- 39.40 Spur, slopes SW.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4  
 S10 | S11  
 1925

from which  
 An oak, 5 ins. diam., brs N.12°E., 132 lks. dist., marked 1/4 S11 BT.  
 An oak, 6 ins. diam., brs N.62 1/2°W., 80 lks. dist., marked 1/4 S10 BT.

- 43.50 Desc. 85 ft. over NW. slope. Enter scattering timber. Creek, 8 lks. wide, 4 ins. deep, course SW.; asc. 512 ft. over steep SW. slope.
- 75.20 Spur, slopes S.20°E.; thence along E. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 2, 3, 10, and 11, marked on brass cap.

T9N R1W  
 S 3 | S 2  
 S10 | S11  
 1925

from which  
 An oak, 8 ins. in diam., brs N.80 1/2°E., 16 lks. dist., marked T9N R1W S2 BT.  
 An oak, 8 ins. diam., brs S.4 1/2°E., 52 lks. dist., marked T9N R1W S11 BT.  
 An oak, 8 ins. diam., brs S.56 1/2°W., 68 lks. dist., marked T9N R1W S10 BT.  
 An oak, 6 ins. diam., brs N.57 1/2°W., 75 lks. dist., marked T9N R1W S3 BT.

Land, mountains.  
 Soil, rocky, 4th rate.  
 Timber, oak in N. 1/2.  
 Undergrowth, oak brush, mahogany, laurel, and cacti.

Chains.

S.89°51'E., on random line bet. secs. 2 and 11.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.70 Intersect the N. and S. line, 12 lks. S. of the cor. of  
 secs. 1, 2, 11, and 12.

Thence

N.89°56'W., on true line bet. secs. 2 and 11.  
 Over mountainous land, thru. very scattering timber and  
 dense undergrowth. Along S. slope.  
 1.70 Spur, slopes SW.; desc. 868 ft. over W. slope.  
 26.00 Creek, dry, course SW.; asc. 38 ft. over SE. slope.  
 30.80 Point of spur; slopes S.; desc. 84 ft. over SW. slope.  
 35.10 Creek, dry, course S.; asc. 90 ft. over E. slope.  
 38.30 Spur, slopes S.10°E.; desc. 15 ft. over SW. slope.  
 39.85 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in  
 the ground to bed rock, deposit a stone marked with a  
 cross (+) at base of post; and raise a mound of stone  
 3 ft. base, 16 ins. high, for  $\frac{1}{4}$  sec. cor., marked on  
 brass cap

$\frac{1}{4}$  S 2  
 S11  
 1925

Desc. 220 ft. over SW. slope.  
 50.40 Creek, dry, course S.; asc. 248 ft. over SE. slope.  
 68.10 Spur, slopes S.10°W.; desc. 160 ft. over W. slope.  
 72.40 Draw, course S.10°W.; asc. 214 ft. over SE. slope.  
 77.50 Spur, slopes S.10°E.; desc. 38 ft. over SW. slope.  
 79.20 Draw, course S.20°W.; asc. 15 ft. over E. slope.  
 79.70 The cor. of secs. 1, 2, 11, and 12.

Land, mountainous, ins.

Soil, rocky, 4th rate.

Timber, very scattered juniper and oak.

Undergrowth, oak brush, buck brush, manzanita, spanish  
dagger, and cacti.

North; on random line bet. secs. 2 and 3.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 82.73 Intersect the cor. of secs. 2, 3, 34, and 35 on the N. bdy.  
 of the tp., hereinbefore described.

Thence

South, on true line bet. secs. 2 and 3.  
 Over mountainous land, through scattering timber and  
 heavy undergrowth.  
 Desc. 133 ft. over SW. slope.  
 4.23 Draw, course SW.; asc. 90 ft. over NW. slope.  
 6.83 Spur, slopes SW.; desc. 107 ft. over SW. slope.  
 12.13 Creek, 3 lks. wide, 3 ins. deep, course N.80°W.; asc. 289  
 ft. over NW. slope.  
 32.13 Spur, slopes W.; desc. 91 ft. over SW. slope.  
 42.73 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
 the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$   
 S 3 | S 2

1925

from which

A juniper, 6 ins. in diam., brs. N.27°W., 48 lks. dist.,  
marked  $\frac{1}{4}$  S3 BT.A juniper, 14 ins. diam., brs S.62°36'W., 124 lks. dist.,  
marked  $\frac{1}{4}$  S3 BT.

Desc. 57 ft. over SW. slope.  
 46.13 Draw, course NW.; asc. 59 ft. over NW. slope.

Survey of the Subdivisions of T9N, R1W.


Chains.

- 49.53 Ridge, brs NE. and SW.; desc. 946 ft. over SE. slope.
- 82.53 Draw, course SE.;
- 82.73 The cor. of secs. 2, 3, 10 and 11.


Land, rough mountains.  
 Soil, rocky, 4th rate.  
 Timber, juniper, oak, and pine.  
 Undergrowth, oak brush, manzanita, mahogany, and laurel.

The standard cor. of secs. 33 and 34 on S. bdy. of Tp. (2nd. Std. Par. N.) is an iron post, 3 ins. in diam., firmly set, properly marked on brass cap, and witnessed by mound of stone N. of cor. No bearing trees.

- Thence, N.0°2'W., bet. secs. 33 and 34.
- Over mountainous land, through scattering undergrowth.
- Desc. slightly over N. slope to wash.
- 1.80 Wash, 25 lks. wide, 2 ft. deep, course E.
- 4.40 Wash, course SE.
- 5.00 Low spur, slopes E.; asc. 139 ft. over S. slope.
- 11.47 Spur, slopes E.; desc. 80 ft. over N. slope.
- 20.00 Wash, 25 lks. wide, 2 ft. deep, course E.; asc. 53 ft. over S. slope.
- 24.27 Spur, slopes E.; desc. 18 ft. over N. slope.
- 28.15 Wash, 35 lks. wide, 2 ft. deep, course SE.; asc. slightly out of wash.
- 31.47 Spur, slopes SE.;
- 37.00 Wash, 15 lks. wide, 2 ft. deep, course E.; thence asc. 108 ft. over S. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 4 ft. base, 14 ins. high, for 1/4 sec. cor., marked on brass cap



- Asc. 97 ft. over S. slope.
- 43.39 Spur, slopes E.; desc. slightly to wash.
- 48.29 Wash, 35 lks. wide, 2 ft. deep, course SE.; asc. 255 ft. over S. slope.
- 58.50 Spur, slopes E.
- 63.54 Spur, slopes SW.; desc. 163 ft. over N. slope.
- 75.20 Wash, course NE.
- 79.93 Spur, slopes NE.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 4 ft. base, 18 ins. high, for cor. of secs. 27, 28, 33, and 34, marked on brass cap



Land, mountainous.  
 Soil, sandy and rocky, 3rd rate.  
 Timber, none.  
 Undergrowth, cacti, palo verde, mescal, ocotilla, oak brush, sage brush.

Chains.	East, on random line bet. secs. 27 and 34.	
40.00	Set temp. $\frac{1}{4}$ sec. cor.	
80.16	Intersect the N. and S. line, 2 lks. S. of the cor. of secs. 26, 27, 34, and 35.	
	Thence	
	S. $89^{\circ}59'W.$ , on true line bet. secs. 27 and 34.	
	Over mountainous land, thru scattering undergrowth.	
	Desc. 210 ft. over SW. slope.	
18.10	Draw, course SE.; asc. 45 ft. over E. slope.	
20.00	Spur, slopes SE.; desc. 203 ft. over SW. slope.	
27.20	Sand creek, dry, course SE.; asc. 210 ft. over NE. slope.	
32.60	Intersect the SE. side line of the Deacon Light patented mining claim, Survey No. 3783, at a point 5.15 chs. S. $12^{\circ}44'W$ of cor. No. 4.	
37.10	Draw, course NE.; asc. 40 ft. over E. slope.	
40.00	An adobe house brs North, 2.50 chs. dist.	
40.08	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap	
	$\frac{1}{4}$ S27 S34 1925	
	Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor. Asc. 184 ft. over broken E. slope.	
43.00	Same draw, course S. $80^{\circ}E.$	
	Building brs N. about 6.00 chs.	
54.69	Intersect the NW. side line of the Prince patented mining claim, survey No. 3783, at a point S. $12^{\circ}56'W.$ , 1.19 chs. dist. from cor. No. 1 of the Gold Spring claim.	
58.60	Spur, slopes S. $70^{\circ}E.$ ; thence along N. slope.	
72.10	Draw, course N. $70^{\circ}E.$ ; asc. 132 ft. over SE. slope.	
78.50	Spur, slopes N.; desc. 32 ft. over NW. slope.	
80.16	The cor. of secs. 27, 28, 33, and 34.	
	Land, mountainous.	
	Soil, rocky, 4th rate.	
	Timber, none.	
	Undergrowth, mesquite, buck brush, ocotilla, and cacti.	
	-----	
	N. $0^{\circ}2'W.$ , bet. secs. 27 and 28.	
	Over mountainous land, through scattering undergrowth.	
	Desc. slightly over N. slope.	
1.00	Wash, 25 lks. wide, 2 ft. deep, course E.; asc. slightly.	
4.00	Spur, slopes E.; desc. slightly over N. slope.	
4.75	Wash, 30 lks. wide, 2 ft. deep, course E.	
11.66	Spur, slopes E.	
15.84	Spur, slopes NE.	
19.44	Wash, 30 lks. wide, 2 ft. deep, course SE.	
23.78	Spur, slopes E.; desc. 96 ft. over N. slope.	
25.83	Wash, 40 lks. wide, 2 ft. deep, course E.; asc. 67 ft. over S. slope.	
31.29	Spur, slopes E.; desc. 51 ft. over N. slope.	
36.49	Wash, 25 lks. wide, 2 ft. deep, course SE.; asc. 69 ft. over S. slope.	
40.00	Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 4 ft. base, 30 ins. high, for $\frac{1}{4}$ sec. cor., marked on brass cap	

Lower

$\frac{1}{4}$   
S28 | S27  
1925



Survey of the Subdivisions of T9N, R1W.

Chains.

41.10 Desc. N. slope slightly.  
Sand creek, dry, 35 lks. wide, 2 ft. deep, course SE.  
Asc. 590 ft. over S. slope.

44.96 Spur, slopes E.; continue asc.

52.54 Spur, slopes SW.; continue asc.

61.21 Rocky spur, slopes W.; continue asc.

70.84 Spur, slopes W.; continue asc.

75.61 Spur, slopes E.; desc. 72 ft. over N. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 16 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 4 ft. base, 20 ins. high, for cor. of secs. 21, 22, 27, and 28, marked on brass cap

T9N R1W  
S21 | S22  
S28 | S27

1925

Land, mountainous.  
Soil, sandy and rocky, 3rd and 4th rate.  
Timber, scattering cottonwood along Sand creek.  
Undergrowth, ocotilla, mescal, cacti, oak brush, catclaw, and sage brush.

40.00 N. 89° 59' E., on random line, bet. secs. 22 and 27.  
Set temp.  $\frac{1}{4}$  sec. cor.

80.10 Intersect the N. and S. line, 7 lks. N. of the cor. of secs. 22, 23, 26, and 27.

Thence  
N. 89° 58' W., on true line bet. secs. 22 and 27.  
Over mountainous land, through scattering undergrowth.  
Asc. 245 ft. over E. slope.

8.50 Ridge, brs N. and S.; desc. 393 ft. over W. slope.

24.00 Draw, course SW.; asc. 183 ft. over SE. slope.

33.00 Spur, slopes SW.; desc. 174 ft. over W. slope.

40.05 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bed rock, deposit a stone marked with a cross (•) at base of post, and raise a mound of stone around post, 4 ft. base, 20 ins. high, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$  S22  
S27  
1925

44.13 Desc. 204 ft. over W. slope.  
Intersect the east side line of the Pittsburg mining claim, patented; Survey No. 3771, at a point S. 4° 15' W. 10.28 chs. from cor. No. 4.

48.90 Creek, dry, course S.; asc. 739 ft. over E. slope.

51.80 Trail, brs N. and S.

53.23 Intersect the west side line of the Pittsburg patented mining claim; Survey No. 3771, at a point N. 4° 15' E., 12.63 chs. dist. from cor. No. 2.

71.20 Spur, slopes NE.; thence along N. slope.

80.10 The cor. of secs. 21, 22, 27, and 28.

Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, none.  
Undergrowth, oak brush, cacti, ocotilla.

## Chains.

- N.0°2'W., bet. secs. 21 and 22.  
 Over mountainous land, through scattering undergrowth:  
 Desc. 91 ft. over N.E. slope.  
 4.81 Draw, course E.; asc. 21 ft. over SE. slope.  
 7.49 Spur, slopes SE.; desc. 116 ft. over NE. slope.  
 14.83 Wash, 35 lks. wide, 2 ft. deep, course SE.; asc. 178 ft.  
 over S. slope.  
 21.68 Rocky spur, slopes SW.; desc. 73 ft. over N. slope.  
 33.43 Spur, slopes SW.; desc. 28 ft. over N. slope.  
 37.80 Wash, 20 lks. wide, 2 ft. deep, course SW.; asc. slightly  
 over S. slope.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in  
 the ground to bed rock, deposit a stone marked with a  
 cross (+) at base of post, and raise a mound of stone  
 around post, 4 ft. base, 28 ins. high, for  $\frac{1}{4}$  sec. cor.,  
 marked on brass cap

 $\frac{1}{4}$ 

S21 | S22

1925

- Asc. 163 ft. over S. slope.  
 50.80 Spur, slopes SW.; desc. slightly over N. slope.  
 53.80 Draw, course SW.; asc. 26 ft. over S. slope.  
 56.83 Rocky spur, slopes SW.; desc. 29 ft. over NW. slope.  
 65.21 Wash, 25 lks. wide, 2 ft. deep, course SW.; asc. 72 ft.  
 over S. slope.  
 69.48 Spur, slopes SW.; desc. slightly over NW. slope.  
 75.80 Wash, 30 lks. wide, 2 ft. deep, course SW.; asc. 38 ft.  
 over S. slope.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 22 ins. in  
 the ground to bed rock, deposit a stone marked with a  
 cross (+) at base of post, and raise a mound of stone  
 around post, 3 ft. base, 14 ins. high, for cor. of secs.  
 15, 16, 21, and 22, marked on brass cap

T9N R1W

S16 | S15

S21 | S22

1925

Land, mountainous.  
 Soil, sandy and rocky, 3rd rate.  
 Timber, none.  
 Undergrowth, mesal, ocotilla, cacti, catclaw, oak brush,  
 and mesquite.

- S.89°58'E., on random line bet. secs. 15 and 22.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.28 Intersect the N. and S. line, 7 lks. N. of the cor. of  
 secs. 14, 15, 22, and 23.

Thence

- N.89°55'W., on true line bet. secs. 15 and 22.  
 Over mountainous land, through scattering undergrowth.  
 Desc. 386 ft. over SW. slope.  
 15.48 Humbug creek, 15 lks. wide, 10 ins. deep, course SE.;  
 asc. 231 ft. over NE. slope.  
 40.14 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in  
 the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap

 $\frac{1}{4}$  S15

S22

1925

- Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.  
 52.37 U.S.L.M. No. 3771 brs S.34°6'E.

Survey of the Subdivisions of T9N, R1W.

Chains.

- 61.78 Trail, brs NW. and SE.
- 72.58 Ridge, brs NW. and SE.; desc. 164 ft. over SW. slope.
- 80.28 The cor. of secs. 15, 16, 21, and 22.

Land, mountainous.  
 Soil, rocky and sandy, 4th rate.  
 Timber, none.  
 Undergrowth, mahogany, oak brush, and laurel.

- N.0°2'W., bet. secs. 15 and 16.  
 Over mountainous land, through heavy undergrowth.  
 Asc. 83 ft. over S. slope.
- 4.42 Spur, slopes W.; desc. 69 ft. over N. slope.
- 9.13 Wash, 20 lks. wide, 2 ft. deep, course W.; asc. 214 ft. over S. slope.
- 12.32 Spur, slopes W.; desc. slightly to wash.
- 13.75 Wash, 25 lks. wide, 2 ft. deep, course W.; asc. 200 ft. over S. slope.
- 27.99 Spur, slopes SW.
- 36.58 Spur, slopes SW.; desc. 20 ft. over N. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone 4 ft. base, 24 ins. high, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$   
 S16 | S15  
 1925

- 45.00 Desc. 10 ft. over N. slope.
- Asc. 32 ft. over S. slope.
- 52.40 Ridge, brs NW. and SE.
- Trail, brs NW. and SE.
- 66.59 Spur, slopes W.; desc. 160 ft. over N. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the ground, for cor. of secs. 9, 10, 15, and 16, marked on brass cap

T9N R1W  
 S 9 | S10  
 S16 | S15  
 1925

Land, mountainous.  
 Soil, rocky and sandy, 3rd rate.  
 Timber, none.  
 Undergrowth, catclaw, sage brush, oak brush, cacti, and mesal.

- 40.00 S.89°55'E., on random line bet. secs. 10 and 15.
- 80.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 Intersect the N. and S. line, 25 lks. N. of the cor. of secs. 10, 11, 14, and 15,

- Thence
- N.89°44'W., on true line bet. secs. 10 and 15.
- Over mountainous land, through scattering undergrowth.
- .30 Spur, slopes SW.; desc. 385 ft. over W. slope.
- 12.80 Trail, brs NE. and SW.
- 13.70 Creek, 8 lks. wide, 3 ins. deep, course SW.; asc. 188 ft. over SE. slope.

## Chains.

- 19.50 Spur, slopes S.; desc. 194 ft. over SW. slope.  
 27.10 Draw, course SE.; asc. 234 ft. over E. slope.  
 27.70 Same trail, brs NW. and SE.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground to bed rock, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$$\begin{array}{r} \frac{1}{4} S10 \\ \hline S15 \\ 1925 \end{array}$$

- Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.  
 Asc. 214 ft. over E. slope.  
 48.00 Spur, slopes S.; desc. 420 ft. over precipitous W. slope.  
 58.20 Humbug creek, 20 lks. wide, 10 ins. deep, course SE.; asc. 178 ft. over NE. slope.  
 80.00 The cor. of secs. 9, 10, 15, and 16.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, none.

Undergrowth, oak brush, magogany, laurel, cacti, and catclaw.

- N.0°2'W., bet. secs. 9 and 10.  
 Over mountainous land, through heavy undergrowth.  
 Desc. 136 ft. over N. slope.  
 3.43 Humbug creek, 35 lks. wide, 7 ins. deep, course E.; asc. 161 ft. over S. slope.  
 7.87 Spur, slopes NW.; desc. 90 ft. over N. slope.  
 19.48 Wash, 25 lks. wide, 2 ft. deep, course W.  
 22.38 Spur, slopes W.; desc. 30 ft. over N. slope.  
 27.80 Wash, 25 lks. wide, 2 ft. deep, course W.; asc. 14 ft. over S. slope.  
 32.71 Spur, slopes W.; desc. slightly over N. slope.  
 35.26 Wash, 20 lks. wide, 2 ft. deep, course W.; asc. 70 ft. over S. slope.  
 40.00 Spur, slopes W.  
 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap

$$\begin{array}{r} \frac{1}{4} \\ S 9 | S10 \\ 1925 \end{array}$$

- Asc. 173 ft. over S. slope.  
 47.05 Spur, slopes SW.; desc. 141 ft. over N. slope.  
 52.32 Spur, slopes W.; desc. 141 ft. over N. slope.  
 58.27 Fence brs E. and W.  
 65.68 Wash, 20 lks. wide, 7 ins. deep, running water, course SW.  
 Asc. 388 ft. over S. slope.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 22 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 3 ft. base, 14 ins. high, for cor. of secs. 3, 4, 9, and 10, marked on brass cap

$$\begin{array}{r} T9N R1W \\ S 4 | S 3 \\ \hline S 9 | S10 \end{array}$$

1925

Corner falls on spur, sloping SE.

Land, mountainous.

Soil, sandy and rocky, 3rd and 4th rate.

Timber, none.

Undergrowth, oak brush, mescal, cacti, manzanita, laurel.

Survey of the Subdivisions of T9N,R1W.

Chains.

40.00  
79.82

S.89°44'E., on random line bet. secs. 3 and 10  
Set temp.  $\frac{1}{4}$  sec. cor.  
Intersect the N. and S. line, 2 lks. N. of the cor. of  
secs. 2,3,10, and 11.

Thence  
N.89°43'W. on true line bet. secs. 3 and 10.  
Over mountainous land, through dense undergrowth.  
Asc. 120 ft. over E. slope.

3.30  
8.00  
11.40  
14.80  
27.00  
27.20  
27.67  
39.91

Spur, slopes SE.; asc. 159 ft. over SE. slope.  
Slope changes to S.  
Slope changes to SW.; desc. 60 ft.  
Draw, course S,20°E.; asc. 359 ft. over SE. slope.  
Ridge, brs NE. and S.10°W.; desc. 299 ft. over W. slope.  
Trail, brs NE. and S.10°W.  
Rock Bluff triangulation station brs N.29°20'W.  
Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in  
the ground to bed rock, deposit a stone marked with a  
cross (+) at base of post, and raise a mound of stone  
around post, 3 ft. base, 16 ins. high, for  $\frac{1}{4}$  sec. cor.,  
marked on brass cap

$\frac{1}{4}$  S 3  
S10  
1925

57.00  
62.50  
67.10  
79.82

Desc. 593 ft. over W. slope.  
Wire fence, brs NW. and SE.  
Creek, dry, course S.20°W.; thence along S. slope.  
Slope changes to SE.; asc. 178 ft. over SE. slope.  
The cor. of secs. 3,4,9, and 10.

Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, scattered juniper and oak.  
Undergrowth, oak brush, laurel, mahogany, and manzanita.

40.00  
81.93

North, on random line bet. secs. 3 and 4.  
Set temp.  $\frac{1}{4}$  sec. cor.  
Intersect the N. bdy. of the Tp., 12 lks. W. of the cor.  
of secs. 3,4,33, and 34., hereinbefore described.

8.45  
17.95  
29.25  
41.93

Thence  
S.0°5'W., on true line bet. secs. 3 and 4.  
Over mountainous land, through heavy undergrowth.  
Asc. 129 ft. over NW. slope.  
Spur, slopes SW.; desc. 346 ft. over S. slope.  
Creek, dry, course SW.; asc. 280 ft. over NW. slope.  
Spur, slopes SW.; desc. 169 ft. over SE. slope.  
Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in  
the ground to bed rock, deposit a stone marked with a  
cross (+) at base of post, and raise a mound of stone  
around post, 3 ft. base, 2 ft. high, for  $\frac{1}{4}$  sec. cor.,  
marked on brass cap

$\frac{1}{4}$   
S 4 | S 3

45.75  
49.35  
65.75  
69.75  
74.45  
75.55  
81.93

Desc. 196 ft. on SE. slope. 1925  
Trail, brs NW. and SE.  
Creek, dry, course SW.; asc. 343 ft. over N. slope.  
Spur, slopes S.80°W.; desc. 81 ft. over SW. slope.  
Head of draw, course S.80°W.; asc. 95 ft. over NW. slope.  
W. slope of small cone shaped hill; desc. 148 ft. over  
SE. slope.  
Fence, brs E. and W.  
The cor. of secs. 3,4,9, and 10.

Survey of the Subdivisions of T9N, R1 W.


Chains.

Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, none.  
Undergrowth, oak brush, laurel, mahogany, manzanita.


The standard cor. of secs. 32 and 33 on S. bdy. of Tp. (2nd. Std., Par. N.) is an iron post, 3 ins. in diam., firmly set, properly marked on brass cap and witnessed by mound of stone N. of cor. No bearing trees.

Thence  
N. 0° 2' W., bet. secs. 32 and 33.

- .68 Over mountainous land, through undergrowth.
- 1.98 Wash, 20 lks. wide, 2 ft. deep, course SW.
- 10.25 Spur, slopes W.; asc. 146 ft. over S. slope.
- 15.46 Wash, 20 lks. wide, 2 ft. deep, course SW.; continue ascent.
- 22.81 Spur, slopes E.; asc. 297 ft. over S. slope.
- 25.00 Spur, slopes SW.; desc. 34 ft. over N. slope.
- 36.72 Wash, 20 lks. wide, 2 ft. deep, course SW.
- 40.00 Spur, slopes SW.; desc. 24 ft. over N. slope.
- Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bed rock, and raise a mound of stone around post, 4 ft. base, 26 ins. high, for  $\frac{1}{4}$  sec. cor., marked on brass cap



- 46.44 Spur, slopes E.; desc. 287 ft. over S. slope.
- 62.09 Spur, slopes E.
- 67.68 Spur, slopes NE.
- 73.76 Spur, slopes NE.; desc. 27 ft. over N. slope.
- 75.36 Draw, course SE.; asc. 124 ft. over S. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 16 ins. in the ground to bed rock, raise a mound of stone around post, 3 ft. base, 20 ins. high, for cor. of secs. 28, 29, 32, and 33, marked on brass cap



1925

from which  
A granite boulder, 14 ft. high, brs N. 57 $\frac{1}{2}$ ° W., 34 lks. dist., marked +B0

Land, mountainous.  
Soil, sandy and rocky, 3rd rate.  
Timber, none.  
Undergrowth, cacti, sage brush, mesqal, and catclaw.

- 40.00 East, on random line bet. secs. 28 and 33.
- 80.14 Set temp.  $\frac{1}{4}$  sec. cor.
- Intersect the N. and S. line, 11 lks. S. of the cor. of secs. 27, 28, 33, and 34.

Thence  
S. 89° 55' W., on true line bet. secs. 28 and 33.

- Over mountainous land, through scattering undergrowth.
- 1.00 Wash, 25 lks. wide, 2 ft. deep, course NE.; asc. 132 ft. over E. slope.
- 7.14 Spur, slopes SE.
- 11.71 Spur, slopes S.; thence desc. 63 ft. over W. slope.

## Survey of Subdivision lines of Township 9 North, Range 1 West. 29

Chains.	
14.11	Wash, 25 lks.wide, 2 ft. deep, course SE.
16.62	Wash, 25 lks.wide, 2 ft.deep, course SE.; ascend 17 ft. over E.slope.
17.69	Spur, slopes S.; desc. slightly to wash.
19.30	Wash, 30 lks.wide, 2 ft.deep, course SE. Ascend 127 ft., over E.slope.
26.94	Spur, slopes SW. Desc. 192 ft., over W.slope.
31.67	Spur, slopes S.; continue descent.
37.50	Wash, 35 lks.wide, 2 ft.deep, course SE. Asc. 86 ft. over E. slope, to
40.07	Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap, $\frac{1}{4}$ S 28 S 33 1925
	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor. Ascend 1035 ft., over E.slope.
43.33	Spur, slopes SE.; continue ascent.
80.14	The cor. of secs. 28, 29, 32 and 33. Land, mountainous. Soil, rocky, 4th rate. Timber, none. Undergrowth, mescal, ocotillo, sage brush, cacti, scrub oak and catclaw.
-----	
	N. 0° 2' W., bet. secs. 28 and 29. Over mountainous land, thru. heavy undergrowth. Ascend 50 ft., over SE.slope.
2.56	Spur, slopes NE. Desc. 57 ft., over NE.slope.
11.00	Wash, 25 lks.wide, 2 ft.deep, course E. Ascend 320 ft., over SE. slope.
33.10	Spur, slopes NE. Desc. 148 ft., over N.slope, to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap, $\frac{1}{4}$ S 29   S 28 1925
	Ascend 64 ft., over SE.slope.
40.25	Draw, course NE.
43.27	Spur, slopes NE., thence over level land.
54.09	Draw, course NE. Asc. 36 ft., over S.slope.
56.59	Spur, slopes E. Desc. 388 ft., over N.slope.
70.34	Wash, 40 lks.wide, 2 ft.deep, course SE. Ascend 35 ft., over SE.slope:
76.27	Spur, slopes E. Desc. 28 ft., over N.slope, to
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 20, 21, 28 and 29, marked on brass cap, T 9 N   R 1 W S 20   S 21 S 29   S 28 1925
	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Land, mountainous. Soil, rocky and gravelly, 3rd and 4th rate. Timber, none. Undergrowth, scrub mesquite, cacti, ocotillo, catclaw, mescal, and scrub oak.
-----	
40.00	N. 89° 55' E., on random line, bet. secs. 21 and 28. Set temp. $\frac{1}{4}$ sec. cor.
80.16	Intersect N. and S. line, 2 lks. S. of the cor. of secs. 21, 22, 27 and 28. Thence, S. 89° 54' W., on true line, bet. secs. 21 and 28. Over mountainous land, thru. scattering undergrowth. Ascend 91 ft., over E.slope.

30 Survey of Subdivision lines of Township 9 North, Range 1 West.

Chains.	
4.81	Spur, slopes NW. Desc. 300ft. over W. slope.
23.65	Wash, 30 lks. wide, 2 ft. deep, course SE. Ascend 48 ft., over E. slope.
28.90	Spur, slopes SE. Descend 85 ft., over W. slope.
35.75	Wash, 40 lks. wide, 2 ft. deep, course SE. Ascend 74 ft., over E. slope, to
40.08	Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,  $\begin{array}{c} \frac{1}{4} S 21 \\ \frac{1}{4} S 28 \\ 1925 \end{array}$
42.00	Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor. Sand Creek (dry) course SE.
80.16	Ascend 345 ft., over NE. slope, to The cor. of secs. 20, 21, 28 and 29. Land, mountainous. Soil, rocky, 4th rate. Timber, none. Undergrowth, cacti, mescal, scrub oak, catclaw, ocotillo and mesquite.
-----	
	N. $0^{\circ} 2' W.$ , bet. secs. 20 and 21. Over mountainous land, thru. heavy undergrowth. Ascend slightly over S. slope.
6.50	Spur, slopes E. Descend 178 ft., over N. slope.
13.20	Wash, 25 lks. wide, 2 ft. deep, course NE. Ascend 75 ft., over S. slope.
19.00	Spur, slopes NE. Desc. 174 ft., over N. slope.
37.44	Wash, 25 lks. wide, 2 ft. deep, course E. Ascend slightly to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bed rock, deposit a stone, marked with a cross (x) at base of post, and raise a mound of stone 4 ft. base, 22 ins. high around post, for $\frac{1}{4}$ sec. cor., marked on brass cap,  $\begin{array}{c} \frac{1}{4} \\ S20   S21 \\ 1925 \end{array}$
46.88	Descend 51 ft., over N. slope. Wash, 35 lks. wide, 2 ft. deep, course E. Ascend slightly over S. slope.
48.47	Spur, slopes E. Desc. slightly over N. slope.
50.00	Sand creek, dry, course SE. (25 lks. wide, 2 ft. deep.) Ascend 138 ft., over S. slope.
53.95	Spur, slopes W.
60.97	Spur, slopes W. Desc. 23 ft., over N. slope.
64.47	Wash, 26 lks. wide, 2 ft. deep, course SW. Ascend 252 ft., over S. slope.
75.50	Spur, slopes SW. Trail, brs. SW. and NE.
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bed rock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone around post, 4 ft. base, 22 ins. high, for cor. of secs. 16, 17, 20 and 21, marked on brass cap,  $\begin{array}{c} T9N   R1W \\ S17   S16 \\ S20   S21 \\ 1925 \end{array}$
	Land, mountainous. Soil, rocky, 4th rate. Timber, none. Undergrowth, scrub palo verde, laurel, cacti, sage brush, mescal, catclaw and scrub oak.
-----	



Survey of the Subdivisions of T9N, R1W.

Chains.

N. 89° 54' E., on random line bet. secs. 16 and 21.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.20 Intersect the N. and S. line, 9 lks. N. of the cor. of  
 secs. 15, 16, 21, and 22.

Thence  
 S. 89° 58' W., on true line bet. secs. 16 and 21.  
 Over mountainous land, through heavy undergrowth.  
 Desc. 150 ft. over W. slope.  
 18.70 Wash, 20 lks. wide, course S.; asc. 390 ft. over E. slope.  
 40.10 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in  
 the ground to bed rock, for  $\frac{1}{4}$  sec. cor., marked on brass  
 cap

$\frac{1}{4}$  S16  
 S21  
 1925

Raise a mound of stone, 3 ft. base, 1 ft. high, around  
 post.  
 The  $\frac{1}{4}$  sec. cor. falls on spur, sloping NE.; desc. slight-  
 ly  
 42.75 Wash, 25 lks. wide, 2 ft. deep, course NE.; asc. 377 ft.  
 over E. slope.  
 56.25 Spur, slopes S.; desc. 321 ft. over W. slope.  
 62.65 Spur, slopes SW.; continue desc.  
 67.70 Wash, 20 lks. wide, 2 ft. deep, course SW.; asc. slightly  
 69.15 Spur, slopes SW.; desc. 69 ft. over W. slope.  
 71.83 Wash, 20 lks. wide, 2 ft. deep, course SW.; asc. slightly  
 75.23 Spur, slopes S.; asc. 60 ft. over E. slope.  
 78.61 Spur, slopes SW.; desc. 41 ft. over W. slope.  
 80.20 The cor. of secs. 16, 17, 20, and 21.

Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, none.  
 Undergrowth, palo verde, cacti, mescal, oak brush,  
 cat claw, and sage brush.

N. 0° 2' W., bet. secs. 16 and 17.  
 Over mountainous land, through heavy undergrowth.  
 Asc. 185 ft. over S. slope.  
 6.06 Spur, slopes W.; continue asc.  
 9.35 Spur, slopes W.; desc. slightly to wash.  
 11.35 Wash, 25 lks. wide, 2 ft. deep, course W.; asc. 131 ft.  
 over SE. slope.  
 18.09 Spur, slopes W.; desc. 88 ft. over N. slope.  
 29.00 Wash, 25 lks. wide, 2 ft. deep, course E.; asc. slightly.  
 36.74 Spur, slopes NE.; desc. 30 ft. over N. slope.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in  
 the ground to bed rock, deposit a stone marked with  
 a cross (+) at base of post, and raise a mound of stone  
 around post, 3 ft. base, 12 ins. high, for  $\frac{1}{4}$  sec. cor.,  
 marked on brass cap

$\frac{1}{4}$   
 S17 | S16  
 1925

Desc. 91 ft. over N. slope.  
 44.81 Wash, 20 lks. wide, 2 ft. deep, course NW.  
 44.90 Trail, brs NW. and SE.; asc. 21 ft. over S. slope.  
 50.70 Spur, slopes W.; desc. 14 ft. over N. slope.  
 52.98 Wash, 25 lks. wide, 2 ft. deep, course NE.; asc. 47 ft.  
 over S. slope.  
 57.32 Spur, slopes E.; desc. 53 ft. over N. slope.  
 62.76 Wash, 25 lks. wide, 2 ft. deep, course E.; asc. 13 ft.  
 over S. slope.

Chains.

- 65.05 Spur, slopes E.; desc. 30 ft. over N. slope.  
 66.40 Wash, 10 lks. wide, 2 ft. deep, course SE.; asc. 201 ft. over S. slope.  
 76.74 Spur, slopes E.  
 79.64 Spur, slopes NE.  
 80.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for cor. of secs. 8, 9, 16, and 17, marked on brass cap

T9N R1W  
 S 8 | S 9  
 S17 | S16

1925

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, none.

Undergrowth, palo verde, oak brush, manzanita, cacti, catclaw, and sage brush.

- 40.00 N. 89° 58' E., on random line bet. secs. 9 and 16.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.22 Intersect the N. and S. line, 9 lks. S. of the cor. of secs. 9, 10, 15, and 16.  
 Thence,  
 S. 89° 54' W., on a true line, bet. secs. 9 and 16.  
 Over mountainous land, through heavy undergrowth.  
 Desc. 138 ft. over W. slope.  
 5.48 Wash, 25 lks. wide, 2 ft. deep, course NE.  
 7.47 Silver Creek, with stream 30 lks. wide, 7 ins. deep, course NE.; Over level land.  
 19.06 Silver creek, 35 lks. wide, 7 ins. deep, course SE.; asc. 24 ft. over E. slope.  
 24.29 Spur, slopes NE.; desc. 16 ft. over W. slope.  
 30.58 Enter Silver creek canyon, brs NE. and SW.  
 32.00 Silver creek, with stream, 35 lks. wide, 7 ins. deep, course NE.  
 33.85 Leave Silver creek canyon, brs NW. and SW.  
 Asc. 141 ft. over E. slope.  
 40.11 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$  S 9  
 S16

1925

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor. The  $\frac{1}{4}$  sec. cor. falls on spur, sloping S.

Asc. E. slope slightly.

- 44.57 Spur, slopes S.; along S. slope.  
 53.85 Spur, slopes S.; desc. slightly over W. slope.  
 56.47 Silver creek, with stream, 30 lks. wide, 7 ins. deep, course SE.; asc. 435 ft. over E. slope.  
 79.53 Spur, slopes NE.; desc. slightly over W. slope.  
 80.22 The cor. of secs. 8, 9, 16, and 17.

Land, mountainous.

Soil, sandy and rocky, 3rd rate.

Timber, none.

Undergrowth, cacti, sage brush, mesal, catclaw, and palo verde.

N. 0° 2' W.; bet. secs. 8 and 9.

Over mountainous land, through scattering timber and undergrowth.

Survey of the Subdivisions of T9N, R1W.

Chains.	Desc. 165 ft. over N. slope.
6.75	Wash, 20 lks. wide, course E.; asc. slightly over S. slope.
7.11	Intersect the side line of Yavapai patented mining claim, Survey No. 2803, at a point S.32°22'W., 9.15 chs. from cor. No. 3.
9.30	Spur, slopes NE.; desc. 100 ft. over N. slope.
14.26	Silver creek, with stream, 50 lks. wide, 7 ins. deep, course E.
21.51	Road to Pacific Mine, brs NE. and SW. Asc. 376 ft. over S. slope.
35.40	Ridge, brs NW. and SE.
39.00	Wash, 25 lks. wide, 2 ft. deep, course E.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S 8   S 9 1925
40.71	Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. The $\frac{1}{4}$ sec. cor. falls on spur, sloping E. Intersect the side line of the Oakland patented mining claim, survey No. 2803, at a point S.32°02'W., 4.19 chs. from cor. No. 2 thereof.
48.16	Spur, slopes E.
58.07	Ridge, brs E. and W.; desc. 304 ft. over N. slope.
69.43	Wash, with running water, 20 lks. wide, 6 ins. deep, course E.; asc. 55 ft. over S. slope.
75.01	Spur, slopes E.; desc. 10 ft. over N. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 4, 5, 8, and 9, marked on brass cap
	T9N R1W S 5   S 4 S 8   S 9 1925
	Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
	Land, mountainous. Soil, sandy and rocky, 3rd and 4th rate. Timber, scattered oak. Undergrowth, manzanita, sage brush, cat claw, and mescal.
40.00	N.89°54'E., on random line bet. secs. 4 and 9. Set temp. $\frac{1}{4}$ sec. cor.
80.24	Intersect the N. and S. line, 12 lks. S. of the cor. of secs. 3, 4, 9, and 10.
	Thence S.89°49'W., on true line bet. secs. 4 and 9. Over mountainous land, through heavy undergrowth. Asc. 12 ft. over E. slope.
1.90	Spur, slopes SW.; desc. 52 ft. over W. slope.
5.08	Wash, 20 lks. wide, course S.; asc. 35 ft. over E. slope.
8.46	Spur, slopes SE.; desc. 448 ft. over W. slope.
19.49	Fence, brs NW. and SE.
33.00	Humbug creek, with stream, 50 lks. wide, 7 ins. deep, course SW.; asc. 148 ft. over E. slope.
35.44	Crown King road, impassible, brs NE. and SW.
38.62	Spur, slopes SW.; desc. 27 ft. over W. slope.
40.12	Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone

31

Chains.

around post, 4 ft. base, 12 ins. high, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$$\begin{array}{r} \frac{1}{4} \text{ S } 4 \\ \text{S } 9 \\ \hline 1925 \end{array}$$

From the  $\frac{1}{4}$  sec. cor., cor. No. 2 of Homestead Entry Survey, No. 356, brs S.27°41'E., 10.57 chs. dist.

- 50.89 Desc. 88 ft. over W. slope.  
Wash, 30 lks. wide, 2 ft. deep, course SE.; asc. 158 ft. over E. slope.
- 60.95 Spur, slopes SE.
- 65.45 Spur, slopes S.; desc. slightly over W. slope.
- 66.25 Wash, 20 lks. wide, 2 ft. deep, course SE.; asc. 20 ft. over E. slope.
- 68.00 Wash, 20 lks. wide, 2 ft. deep, course NE.; asc. 173 ft. over E. slope.
- 78.50 Spur, slopes S.; desc. 10 ft. over W. slope.
- 80.24 The cor. of secs. 4, 5, 8, and 9.

Land, mountainous.

Soil, sandy and rocky, 3rd and 4th rate.

Timber, none.

Undergrowth, mescal, manzanita, oak brush, catclaw, sage brush, and cacti.

- 40.00 North, on random line bet. secs. 4 and 5.  
Set temp.  $\frac{1}{4}$  sec. cor.
- 82.56 Intersect the N. bdy. of the tp., 28 lks. E. of the cor. of secs. 4, 5, 8, and 9., hereinbefore described.

Thence

S.0°12'E., on true line bet. secs. 4 and 5.

Over mountainous land, through dense undergrowth.

Asc. slightly over N. slope.

- 11.24 Spur, slopes SW.; desc. 397 ft. over S. slope.
- 15.12 Spur, slopes SW.; continue desc.
- 36.06 Wash, 25 lks. wide, 2 ft. deep, course W.; asc. 11 ft. over N. slope.
- 42.56 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 3 ft. base, 24 ins. high, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$$\frac{1}{4}$$

$$\begin{array}{r} \text{S } 5 \text{ | } \text{S } 4 \\ \hline 1925 \end{array}$$

- 50.49 Desc. slightly over S. slope 121 ft.  
Spur, slopes W.; continue desc.
- 52.36 Wash, 30 lks. wide, 6 ins. deep, with water in places, course SE.; asc. slightly.
- 54.53 Spur, slopes E.; desc. 20 ft. over S. slope.
- 55.34 Wash, 25 lks. wide, 2 ft. deep, course E.; asc. 236 ft. over N. slope.
- 64.54 Spur, slopes E.; continue asc.
- 66.84 Spur, slopes E.; desc. 67 ft. over SE. slope.
- 69.91 Wash, 15 lks. wide, 2 ft. deep, course E.; asc. 96 ft. over S. slope.
- 73.69 Spur, slopes E.; desc. slightly over S. slope.
- 75.78 Wash, 10 lks. wide, 2 ft. deep, course E.; asc. 68 ft. over N. slope.
- 77.68 Spur, slopes SE.; desc. 21 ft. over S. slope.
- 82.56 The cor. of secs. 4, 5, 8, and 9.

Survey of the Subdivisions of T9N, R1W


Chains.

Land, mountainous.  
Soil, sandy, gravelly; 3rd rate.  
Timber, none.  
Undergrowth, mahogany, oak brush, palo verde, catclaw, laurel, walnut.


The standard cor. of secs. 31 and 32, on S. bdy. of Tp., (2nd. Std. Par. No.) is an iron post, 3 ins. in diam., firmly set, properly marked on brass cap, and witnessed by mound of stone N. of cor. No bearing trees.

Thence  
N.0°3'W., bet. secs. 31 and 32.  
Over mountainous land, through scattering undergrowth.  
Asc. 284 ft. over S. slope.

- 8.95 Spur, slopes E.; desc. 48 ft. over N. slope.
- 14.30 Gulch, course E.; asc. 28 ft. over S. slope.
- 19.21 Spur, slopes E.
- 29.11 Spur, slopes NE.; desc. 132 ft. over N. slope.
- 32.50 Wash, course E., 35 lks. wide, 2 ft. deep.; asc. slightly
- 36.00 Wash, course SE.; asc. 46 ft. over S. slope.
- 38.00 Spur, slopes SW.; desc. slightly.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground, to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 4 ft. base, 30 ins. high, for 1/4 sec. cor. marked on brass cap



- 40.43 Same wash, course SW.; asc. 375 ft. over S. slope.
- 61.08 Spur, slopes W.; desc. 17 ft. over N. slope.
- 63.77 Gulch, course W.; asc. 129 ft. over S. slope.
- 68.37 Spur, slopes W.; desc. 18 ft. over N. slope.
- 75.24 Wash, 20 lks. wide, 2 ft. deep, course W.; asc. 102 ft. over S. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in the ground, to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 4 ft. base, 28 ins. high, for cor. of secs. 29, 30, 31, and 32, marked on brass cap



1925

Land, mountainous.  
Soil, sandy, gravelly, and rocky, 3rd and 4th rate.  
Timber, none.  
Undergrowth, cacti, palo verde, cacti, ocotilla, sage brush, catclaw, mescal, and mesquite.

- 40.00 East, on random line bet. secs. 29 and 32.
- 80.04 Set temp. 1/4 sec. cor.  
Intersect the N. and S. line, 12 lks. N. of the cor. of secs. 28, 29, 32, and 33.

Thence  
N.89°55'W., on true line bet. secs. 29 and 32.  
Over mountainous land, through scattering undergrowth.  
Asc. 95 ft. over E. slope.

## Chains

- 4.12 Main ridge of Silver mountain, brs N.10°W and SE.  
Desc. 606 ft. over W. slope.
- 23.79 Wash, 25 lks. wide, 2 ft. deep, course S.; asc. 73 ft.  
over E. slope.
- 28.99 Spur, slopes S.; desc. 205 ft. over W. slope.
- 40.02 True point for  $\frac{1}{4}$  sec. cor. falls in wash, 35 lks. wide,  
course S., where it is impracticable to set monument.
- 40.38 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in  
the ground to bed rock, deposit a stone marked with a  
cross (+) at base of post, and raise a mound of stone  
around post, 4 ft. base, 28 ins. high, for wit. cor. to  
 $\frac{1}{4}$  sec. cor., marked on brass cap
- $\frac{1}{4}$  S29 WC  
S32  
1925
- Asc. 16 ft. over E. slope.
- 42.34 Spur, slopes S.; desc. 142 ft. over W. slope.
- 48.49 Spur, slopes SW.; continue desc.
- 55.00 Wash, 30 lks. wide, 2 ft. deep, course SE.; asc. 418 ft.  
over E. slope.
- 66.02 Spur, slopes SE.; continue asc.
- 70.99 Spur, slopes SE.; desc. 157 ft. over W. slope.
- 80.04 The cor. of secs. 29, 30, 31, and 32.
- Land, mountainous.  
Soil, sandy and rocky, 3rd and 4th rate.  
Timber, none.  
Undergrowth, ocotilla, mescal, catclaw, sage brush, cat  
claw, and oak brush.
- 
- 40.00 West, on random line bet. secs. 30 and 31.  
Set temp.  $\frac{1}{4}$  sec. cor.
- 79.84 Intersect the W. bdy. of the tp., 12 lks. S. of the cor.  
of secs. 25, 30, 31, and 36, which is an iron post, 2 ins.  
in diam., firmly set, properly marked on brass cap,  
and witnessed by a mound of stone W. of cor.  
No bearing trees.
- Thence  
S.89°55'E., on true line bet. secs. 30 and 31.  
Over mountainous land, through scattering undergrowth.  
Desc. 100 ft. over E. slope.
- 10.15 Wash, course SE.; asc. 57 ft. over W. slope.
- 12.61 Dim road, brs SE. and NW. (Not used)
- 14.51 Spur, slopes SE.; desc. 31 ft. over E. slope.
- 27.45 Wash, 15 lks. wide, 2 ft. deep, course SE.; asc. slightly
- 29.00 Spur, slopes SW.; asc. 63 ft. over W. slope.
- 37.40 Spur, slopes S.; desc. 21 ft. over E. slope.
- 39.84 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap
- $\frac{1}{4}$  S30  
S31  
1925
- 40.35 Raise mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.  
Wash, 35 lks. wide, 2 ft. deep, course SW.; asc. 44 ft.  
over W. slope.
- 43.35 Spur, slopes SW.; desc. 23 ft. over E. slope.
- 48.90 Wash, 25 lks. wide, 2 ft. wide, course S.
- 54.35 Spur, slopes SW.; desc. 121 ft. over E. slope.
- 59.20 Wash, 35 lks. wide, 2 ft. deep, course SE.; asc. 390 ft.  
over W. slope.
- 79.84 The cor. of secs. 29, 30, 31, and 32.
- Land, mountainous.

## Survey of the Subdivisions of T9N, R1W.

37

Chains.

Soil, sandy and rocky, 3rd and 4th rate.  
 Timber, none.  
 Undergrowth, mesquite, cacti, ocotilla, mescal, and  
 catclaw.

N.0°3'W., bet. secs. 29 and 30.  
 Over mountainous land, through scattering undergrowth.  
 Asc. 210 ft. over S. slope.

18.40 Spur, slopes W.; desc. 530 ft. over N. slope.  
 29.00 Wash, 35 lks. wide, course W.; asc. 80 ft. over S. slope.  
 34.10 Spur, slopes SW.; desc. 50 ft. over N. slope.  
 37.20 Wash, 25 lks. wide, course SW.; asc. 20 ft. over SW. slope.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in  
 the ground to bed rock, deposit a stone marked with a  
 a cross (+) at base of post, and raise a mound of stone  
 around post, 4 ft. base, 14 ins. high, for  $\frac{1}{4}$  sec. cor.,  
 marked on brass cap

$\frac{1}{4}$   
 S29 | S30  
 1925

41.70 Desc. 20 ft. over NW. slope.  
 Wash, 20 lks. wide, course SW.; asc. 920 ft. over SW.  
 slope.  
 77.90 Spur, slopes W.; desc. 20 ft. over N. slope.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins.  
 in the ground, for cor. of secs. 19, 20, 29, and 30,  
 marked on brass cap

T9<sup>N</sup> R1W  
 S19 | S20  
 S30 | S29  
 1925

Raise mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
 Land, mountainous  
 Soil, sandy and gravelly, 3rd and 4th rate.  
 Timber, none.  
 Undergrowth, mesquite, cacti, ocotilla, mescal, and  
 catclaw.

40.00 S.89°55'E., on random line bet. secs. 20 and 29.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.14 Intersect the N. and S. line, 2 lks. N. of the cor. of  
 secs. 20, 21, 28, and 29.

Thence

N.89°54'W., on true line bet. secs. 20 and 29  
 Over mountainous land, through heavy undergrowth.  
 Asc. 445 ft. over E. slope.  
 6.63 Spur, slopes N.; continue asc.  
 13.20 Wash, 25 lks. wide, 2 ft. deep, course N.; continue asc.  
 19.07 Spur, slopes NE.; continue asc.  
 22.07 Wash, 25 lks. wide, 2 ft. deep, course NE.; asc. 118 ft.  
 over S. slope.  
 26.47 Wash, 30 lks. wide, 2 ft. deep, course NE.; asc. 176 ft.  
 over E. slope.  
 32.51 Main ridge of Silver mountain, brs NE. and SW.; desc.  
 157 ft. over W. slope.  
 40.07 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the  
 ground, to bed rock, deposit a stone marked with a cross  
 (+) at base of post, and raise a mound of stone around

## Survey of the Subdivisions of T9N, R1W.

38

Chains.

post, 4 ft. base, 28 ins. high, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$  S20  
S29  
1925

41.70 Desc. 41 ft. over W. slope.  
43.85 Wash, 20 lks. wide, 2 ft. deep, course SE.  
46.15 Spur, slopes SE.; desc. 23 ft. over W. slope.  
48.44 Wash, 25 lks. wide, 2 ft. deep; asc. slightly.  
51.24 Spur, slopes SE.; desc. slightly.  
56.64 Wash, 25 lks. wide, 2 ft. deep, course S.; asc. 52 ft. over E. slope.  
63.81 Spur, slopes SW.; desc. 210 ft. over W. slope.  
69.61 Wash, 25 lks. wide, 2 ft. deep, course SE.; asc. slightly  
71.71 Spur, slopes SW.; desc. 29 ft. over W. slope.  
72.06 Wash, 30 lks. wide, 2 ft. deep, course SE.  
78.58 Wash, course SE.; asc. 108 ft. over E. slope.  
80.14 Spur, slopes SW.; desc. 21 ft. over W. slope.  
The cor. of secs. 19, 20, 29, and 30.

Land, mountainous.

Soil, sandy and rocky, 3rd and 4th rate.

Timber, none.

Undergrowth, cacti, manzanita, ocotilla, oak brush, mesquite, and catclaw.

40.00 N.89°55'W., on random line bet. secs. 19 and 30.  
79.84 Set temp.  $\frac{1}{4}$  sec. cor.  
Intersect the W. bdy. of the Tp., 7 lks. S. of the cor. of secs. 19, 24, 25, and 30, which is an iron post, 2 ins. in diam., firmly set, properly marked on brass cap, and witnessed by a mound of stone W. of cor.  
No bearing trees.  
Thence  
S.89°52'E. on true line bet. secs. 19 and 30.  
Over mountainous land; through heavy undergrowth.  
Asc. 57 ft. over W. slope.  
5.00 Desc. 41 ft. over E. slope.  
11.30 Wash, 76 lks. wide, 2 ft. deep, course S.; asc. slightly over W. slope.  
13.30 Spur, slopes NW.; desc. 29 ft. over E. slope.  
16.60 Same wash, 35 lks. wide, 2 ft. deep, course NW.  
27.30 Same wash, 35 lks. wide, 2 ft. deep, course SW.; asc. 100 ft. over W. slope.  
38.45 Spur, slopes NW.; desc. slightly over E. slope.  
39.84 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 4 ft. base, 12 ins. high, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$  S19  
S30  
1925

42.00 Desc. slightly.  
47.25 Same wash, course NW.; asc. 89 ft. over W. slope.  
50.75 Spur, slopes SE.; desc. 16 ft. over E. slope.  
56.90 Same wash, 25 lks. wide, 2 ft. deep, course SW.; Asc. 233 ft.  
59.20 Spur, slopes N.; desc. slightly over E. slope.  
63.70 Same wash, 25 lks. wide, 2 ft. deep, course NW.  
64.50 Spur, slopes SE.; desc. slightly  
75.85 Same wash, course SW.; asc. 491 ft. over W. slope.  
79.84 Wash, 25 lks. wide, 2 ft. deep, course N.80°W.  
The cor. of secs. 19, 20, 29, and 30.



Survey of the Subdivisions of T9N, R1W.


Chains.

Land, mountainous.  
 Soil, sandy and rocky, 3rd rate.  
 Timber, none.  
 Undergrowth, oak brush, cacti, sage brush, mescal, palo verde, manzanita, ocotilla, catclaw, and mahogany.

N.0°3'W., bet. secs. 19 and 20.  
 Over mountainous land, through heavy undergrowth.  
 Asc. 728 ft. over SW. slope.


34.00  
 38.09  
 40.00

Spur, slopes W.; desc. 16 ft. over N. slope.  
 Wash, course W.; asc. slightly out of wash.  
 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground to bed rock, and raise a mound of stone around post, 4 ft. base, 12 ins. high, for  $\frac{1}{4}$  sec. cor. marked on brass cap



40.75  
 43.05  
 48.15  
 51.93  
 58.18  
 65.71  
 70.80  
 78.70  
 80.00

Desc. slightly to wash.  
 Wash, 15 lks. wide, course W.; asc. 96 ft. over S. slope.  
 Spur, slopes SW.; desc. 91 ft. over N. slope.  
 Wash, 25 lks. wide, 2 ft. deep, course W.; asc. 151 ft. over N. slope.  
 Spur, slopes SW.; continue asc.  
 Main ridge of Silver mountain, brs N.10°W. and S.5°E.  
 Desc. 130 ft. over NE. slope.  
 Spur, slopes NE.  
 Wash, 20 lks. wide, 2 ft. deep, course E.; asc. 272 ft. over S. slope.  
 Spur, slopes E.; desc. 17 ft. over N. slope.  
 Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground, to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 4 ft. base, 24 ins. high, for cor. of secs. 17, 18, 19, and 20, marked on brass cap



Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, none.  
 Undergrowth, laurel, palo verde, cacti, sage brush, oak-brush, mescal, and catclaw.

40.00  
 80.04

S.89°54'E., on random line bet. secs. 17 and 20.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 Intersect the N. and S. line, 7 lks. N. of the cor. of secs. 16, 17, 20, and 21.

3.54  
 8.18  
 9.17

Thence  
 N.89°51'W., on true line bet. secs. 17 and 20.  
 Over mountainous land, through heavy undergrowth.  
 Desc. 31 ft. over W. slope.  
 Spur, slopes SW.; desc. 124 ft. over W. slope.  
 Wash, 15 lks. wide, 2 ft. deep, course S.; asc. 53 ft. over E. slope.  
 Spur, slopes S.; desc. 23 ft. over W. slope.

40

Chains.

- 15.14 Sand creek, dry, 40 lks. wide, 2 ft. deep, course SE.; a asc. 263 ft. over E. slope.
- 32.04 Spur, slopes S.; desc. 80 ft. over W. slope.
- 37.00 Draw, course SE.; asc. 47 ft. over E. slope.
- 38.55 Spur, slopes S.; desc. 10 ft. over W. slope.
- 40.02 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone 4 ft. base, 24 ins. high around post, for  $\frac{1}{4}$  sec. cor., marked on brass cap
- $\frac{1}{4}$  S17  
S20  
1925
- Desc. 30 ft. over W. slope.
- 45.00 Gulch, course S.; asc. broken E. slope 770 ft.
- 80.04 The cor. of secs. 17, 18, 19, and 20.
- Land, mountainous.  
Soil, **sandy** and rocky, 3rd and 4th rate.  
Timber, none.  
Undergrowth, manzanita, mescal, cacti, palo verde, oak brush, and cacti.
- 
- N.  $89^{\circ}52'W.$ , on random line bet. secs. 18 and 19.
- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
- 79.78 Intersect the W. bdy. of the tp., 23 lks. N. of the cor. of secs. 13, 18, 19, and 24, which is an iron post, 2 ins. in diam., firmly set, properly marked on brass cap, and witnessed by a mound of stone W. of cor.  
No bearing trees.
- Thence  
N.  $89^{\circ}58'E.$ , on true line bet. secs. 18 and 19  
Over mountainous land, through heavy undergrowth.  
Asc. 908 ft. over W. slope.
- 23.80 Spur, slopes SW.; continue asc.
- 35.53 Intersect the side line of the Noonday patented mining claim, survey No. 2594, at a point S.  $46^{\circ}16'W.$ , 10 lks. dist. from cor. No. 4.
- 33.78 Spur, slopes NW.; desc. 27 ft. over E. slope.
- 36.32 Wash, course NE.; asc. 10 ft. over W. slope.
- 39.78 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap
- $\frac{1}{4}$  S18  
S19  
1925
- Raise mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor. From  $\frac{1}{4}$  sec. cor., Peak G.S. brs S.  $46^{\circ}16'E.$ , 18.97 chs.
- 40.75 Spur, slopes NW.; desc. 157 ft. over E. slope.
- 43.86 Intersect the side line of the Empire patented mining claim, survey No. 2274, at a point N.  $11^{\circ}51'E.$ , 5.76 chs. from cor. No. 3.
- 47.66 Wash, 20 lks. wide, 2 ft. deep, course N.; asc. 40 ft. over W. slope.
- 51.52 Spur, slopes NW.; desc. slightly.
- 52.34 Wash, course NW.; asc. 40 ft. over W. slope.
- 56.56 Spur, slopes N.; desc. 24 ft.
- 58.20 Same wash, 25 lks. wide, 2 ft. deep, course NW.; asc. 97 ft. over W. slope.
- 61.00 Desc. 75 ft. over E. slope.
- 63.68 Wash, course S.  $80^{\circ}W.$ ; asc. 78 ft. over W. slope.
- 68.52 Spur, slopes S.;

Survey of the Subdivisions of T9N, R1W.

Chains.

- 76.05 Asc. 171 st. over W. slope.
- 76.05 Main ridge of Silver mountain, brs N. and S.; desc. 102 ft. over E. slope.
- 79.78 The cor. of secs. 17, 18, 19, and 20.

Land, mountainous.  
 Soil, sandy and rocky, 3rd and 4th rate.  
 Timber, none.  
 Undergrowth, manzanita, cacti, catclaw, and sage brush.

N.0°3'W., bet. secs. 17 and 18.  
 Over mountainous land, through heavy undergrowth.  
 Asc. 37 ft. over S. slope.

- 3.76 Spur, slopes E.; desc. 159 ft. over NE. slope.
- 7.13 Spur, slopes E.; continue desc.
- 13.45 Draw, course E.; asc. 40 ft. over S. slope.
- 14.85 Spur, slopes E.; desc. 80 ft. over N. slope.
- 19.50 Wash, course E.; asc. 44 ft. over S. slope.
- 22.08 Spur, slopes E.
- 26.22 Spur, slopes E.; desc. 155 ft. over N. slope.
- 30.40 Wash, 25 lks. wide, 2 ft. deep, course NE.; asc. 87 ft. over SE. slope.
- 36.80 Intersect side line of Buffalo patented mining claim, Survey No. 2274, at a point S.39°07'W., 11.17 chs. dist. from cor. No. 2.
- 37.48 Spur, slopes E.; desc. 60 ft. over N. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$   
 S18 | S17

1925

- 42.10 Raise mound of stone, 2 ft. base, 1½ ft. high, W. of cor. Desc. 50 ft. over N. slope.
- 42.10 Wash, 20 lks. wide, 2 ft. deep, course E.; asc. 150 ft. over S. slope.
- 51.34 Intersect side line of Little Pittsburg patented mining claim, Survey No. 2274, at a point N.36°10'E., 10 lks. from cor. No. 1.
- 51.41 U.S.L.M. No. 2274 brs E., 25 lks. dist.
- 54.45 Silver G.S. brs N.60°13'W.  
 Desc. 569 ft. over N. slope.
- 60.13 Wash, 20 lks. wide, 2 ft. deep, course NE.; asc. 40 ft.
- 61.51 Spur, slopes E.; continue desc.
- 67.68 Spur, slopes E.; continue desc.
- 79.50 Wash, 20 lks. wide, 2 ft. deep, course E.; asc. 10 ft.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in the ground, to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 4 ft. base, 22 ins. high, for cor. of secs. 7, 8, 17, and 18, marked on brass cap.

T9N R1W  
 S 7 | S 8  
 S18 | S17

1925

Land, mountainous.  
 Soil, rocky and sandy, 3rd and 4th rate.  
 Timber, none.  
 Undergrowth, cacti, manzanita, catclaw, and sage brush.

Chains.	S.89°51'E., on random line bet. secs. 8 and 17.	
40.00	Set temp. $\frac{1}{4}$ sec. cor.	
80.20	Intersect the N. and S. line, 3 lks. S. of the cor. of secs. 8,9,16, and 17.	
	Thence	
	N.89°52'W., on true line bet. secs. 8 and 17.	
	Over mountainous land, through dense undergrowth and scattering timber. Desc. 55 ft., over W. slope.	
4.50	Intersect the side line of Yavapai patented mining claim, Survey No. 2803, at a point N.32°22'E., 5.06 chs. from cor. No. 4.	
4.73	Spur, slopes N.; desc. 193 ft. over W. slope.	
16.60	Spur, slopes NW.; continue desc.	
25.75	Trail, brs N. and S.	
27.05	Wash, 25 lks. wide, 2 ft. deep, course NE.; asc. 61 ft. over E. slope.	
32.75	Spur, slopes NE.	
34.68	Spur, slopes NE.; desc. 52 ft. over W. slope.	
39.80	Wash, 10 lks. wide, 2 ft. deep, course N.70°E.; asc. slightly.	
40.10	Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone 3 ft. base, 18 ins. high, around post, for $\frac{1}{4}$ sec. cor., marked on brass cap	
	$\frac{1}{4}$ S 8 $\frac{1}{4}$ S 17 1925	
	Asc. 300 ft. over broken NE. slope.	
56.44	Intersect the side line of the Austin patented mining claim, Survey No. 2274, at a point S.44°35'W., 8.06 chs. from cor. No. 4.	
80.20	The cor. of secs. 7,8,17, and 18.	
	Land, mountainous.	
	Soil, sandy and rocky, 3rd and 4th rate.	
	Timber, scattering oak.	
	Undergrowth, manzanita, sage brush, cacti, catclaw, oak brush.	
	-----	
	S.89°58'W., on random line bet. secs. 7 and 18.	
40.00	Set temp. $\frac{1}{4}$ sec. cor.	
79.80	Intersect the W. bdy. of the tp., 49 lks. S. of the cor. of secs. 7,12,13, and 18, which is an iron post, 2 ins. in diam., firmly set, properly marked on brass cap, and witnessed by mound of stone W. of cor.	
	No bearing trees.	
	Thence	
	S.89°41'E., on true line bet. secs. 7 and 18.	
	Over mountainous land, through dense undergrowth, and scattering timber. Asc. 195 ft., over E. slope.	
7.25	Spur, slopes S.; desc. slightly over E. slope.	
8.44	Wash, 40 lks. wide, 2 ft. deep, course SW.; asc. 300 ft. over W. slope.	
23.26	Spur, slopes SW.	
28.26	Spur, slopes S.; asc. 102 ft. over W. slope.	
33.16	Top of Silver mountain, brs NW. and SE.; thence across.	
39.80	Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 3 ft. base, 12 ins. high, for $\frac{1}{4}$ sec. cor., marked on brass cap	

Survey of the Subdivisions of T9N, R1W.

Chains.

1/4 S 7  
S 18  
1925

79.80 Desc. 620 ft. over E. slope to  
The cor. of secs. 7, 8, 17, and 18.

Land, mountainous.  
Soil, sandy and rocky, 3rd and 4th rate.  
Timber, scattering oak.  
Undergrowth, oak brush, cacti, sage brush, palo verde,  
and catclaw.

N.0°3'W., bet. secs. 7 and 8.  
Over mountainous land, through dense undergrowth and  
scattering timber.

- 4.81 Asc. 114 ft. over S. slope.
- 11.64 Spur, slopes E.; desc. 89 ft. over N. slope.
- 14.40 Wash, 25 lks. wide, 2 ft. deep, course E.; asc. slightly.
- 20.56 Wash, 15 lks. wide, 2 ft. deep, course SE.; asc. 115 ft.  
over S. slope.
- 24.95 Spur, slopes E.; desc. 14 ft. over N. slope.
- 29.40 Wash, 25 lks. wide, 2 ft. deep, course E.; asc. 80 ft.  
over S. slope.
- 29.84 Spur, slopes E.; desc. 156 ft. over N. slope.
- 37.45 Del Pasco G.S. brs N.12°27'E.; desc. 156 ft. over N. slope
- 40.00 Wash, 20 lks. wide, 2 ft. deep, course E.; asc. slightly  
over S. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, for 1/4 sec. cor., marked on brass cap

1/4  
S 7 | S 8  
1925

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of  
cor.

- 43.06 Asc. 33 ft. over SE. slope.
- 46.32 Spur, slopes E.; desc. 64 ft. over N. slope.
- 48.04 Wash, 25 lks. wide, 2 ft. deep, course E.; asc. slightly.
- 49.75 Spur, slopes E.; desc. 21 ft. over N. slope.
- 51.12 Wash, 25 lks. wide, 2 ft. deep, course E.; asc. 40 ft.  
over S. slope.
- 55.84 Spur, slopes E.
- 60.13 Spur, slopes E.; desc. 69 ft. over N. slope.
- 61.60 Wash, 25 lks. wide, 2 ft. deep, course E.; asc. 25 ft.
- 63.50 Spur, slopes E.; desc. slightly to wash.
- 64.50 Enter wash, course SE.
- 71.86 Leave wash, course S.; asc. 20 ft. over S. slope.
- 80.00 Spur, slopes W.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in  
the ground, for cor. of secs. 5, 6, 7, and 8, marked on  
brass cap.

T9N R1W  
S 6 | S 5  
S 7 | S 8.  
1925

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, mountainous.  
Soil, sandy and rocky, 3rd rate.  
Timber, scattering oak.  
Undergrowth, manzanita, catclaw, sage brush, and catclaw.

## Survey of the Subdivisions of T9N, R1W.

44

Chains.	S.89°52'E. on random line bet. secs. 5 and 8.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.16	Intersect the N. and S. line, 7 lks. N. of the cor. of secs. 4,5,8, and 9.
	Thence
	N.89°49'W., on true line bet. secs. 5 and 8.
	Over mountainous land, through dense undergrowth.
	Asc. 102 ft. over NE. slope.
7.96	Spur, slopes SE.; desc. 72 ft. over SW. slope.
11.86	Head of draw, course S.20°E.; asc. 316 ft. over SE. slope.
40.08	Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bed rock, deposit a stone marked with a cross (+) at base of post, and raise a mound of stone around post, 4 ft. base, 20 ins. high, for $\frac{1}{4}$ sec. cor. marked on brass cap
	$\frac{1}{4}$ S 5 S 8 1925
	The $\frac{1}{4}$ sec. cor. falls on ridge, brs NW. and SE.; desc. 145 ft. over SW. slope.
48.16	Draw, course S.10°W.; asc. 181 ft. over SE. slope.
55.15	Spur, slopes S.; desc. 220 ft. over SW. slope.
72.15	Draw, course SE.; asc. 195 ft. over SE. slope.
	Trail, brs SE. and NW.
80.16	The cor. of secs. 5,6,7, and 8.
	Land, mountainous.
	Soil, rocky, 4th rate.
	Timber, none.
	Undergrowth, oak brush, manzanita, laurel, buck brush, and mahogany.
	<hr/>
	N.89°41'W.
	on random line bet. secs. 6 and 7.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.62	Intersect the cor. of secs. 1,6,7, and 12, on the W. bdy. of the tp., which is an iron post, 2 ins. in diam., firmly set, properly marked on brass cap, and witnessed by mound of stone W. of cor.
	No bearing trees.
	Thence
	S.89°41'E. on true line bet. secs. 6 and 7.
	Over mountainous land, through dense undergrowth
	Asc. 361 ft. over W. slope.
24.28	Main ridge of Silver mountain, brs N. and S.; desc. 289 ft. over E. slope to $\frac{1}{4}$ sec. cor.
35.12	An unfinished highway, never used, brs NW. and SE.
39.62	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap
	OS $\frac{1}{4}$ S 6 S 7 1925
	Raise mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
	Desc. 465 ft. over E. slope.
44.33	Spur, slopes NE.; continue desc.
55.65	Spur, slopes SE.; continue desc.
59.68	Wash, 25 lks. wide, 2 ft. deep, course NE.; asc. slightly.
61.28	Spur, slopes NE.; desc. 98 ft. over E. slope.
63.98	Spur, slopes NE.
67.33	Spur, slopes NE.
70.50	Spur, slopes NE.
72.32	Wash, 25 lks. wide, 2 ft. deep, course SE.; asc. 70 ft. over W. slope.
78.97	Spur, slopes SE.; desc. 21 ft. over E. slope.


Survey of the Subdivisions of T9N, R1W.

Chains.

79.62 The cor. of secs. 5, 6, 7, and 8.  
 Land, mountainous.  
 Soil, sandy and gravelly, 3rd rate.  
 Timber, none.  
 Undergrowth, catclaw, manzanita, oak brush, laurel and pinyon.

40.00 North, on random line bet. secs. 5 and 6.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 82.18 Intersect the cor. of secs. 5, 6, 31, and 32, on the N. bdy. of the tp., hereinbefore described.

Thence  
 South, on true line bet. secs. 5 and 6.  
 Over mountainous land, through dense undergrowth.  
 Desc. 05 ft. over SE. slope.  
 2.38 Draw, course E.; asc. 127 ft. over NE. slope.  
 13.78 Spur, slopes E.; desc. 148 ft. over SE. slope.  
 25.28 Draw, course SE.; asc. 111 ft. over NE. slope.  
 31.38 Spur, slopes SE.; desc. 240 ft. over S. slope.  
 37.38 Draw, course SE.; asc. 144 ft. over N. slope.  
 42.18 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap



1925

56.88 Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Asc. 225 ft. over NE. slope.  
 Ridge, brs N. 70° W. and S. 70° E.; desc. 243 ft. over S. slope.  
 68.98 Draw, course SE.; asc. 130 ft. over NE. slope.  
 Trail in bottom of draw, brs SE. and NW.  
 79.00 Spur, slopes E.; desc. 20 ft. over SE. slope.

82.18 The cor. of secs. 5, 6, 7, and 8.  
 Land, mountainous.  
 Soil, rocky and sandy, 3rd rate.  
 Timber, none.  
 Undergrowth, oak brush, manzanita, laurel, mahogany, and buck brush.

FINAL TEST OF INSTRUMENTS  
8478 and 8541.

April 29, 1925: We examine the adjustments of the transits and find them correct; then to test the solar apparatus by comparing their indications, resulting from observations made during a.m. and p.m. hours with a meridian established by observation on Polaris on April 3, 1925, and described on page 2 hereof; We proceed as follows:

At 8h 0m a.m., l.m.t., We set off  $34^{\circ}10'N.$  on the lat. arcs,  $14^{\circ}27'N.$  on the decl. arcs; and determine a meridian with the solar which we find to agree with the true meridian.

At apparent noon with the lat. arcs unchanged, we observe the sun on the meridian; the resulting reading of each decl. arc is  $14^{\circ}29\frac{1}{2}'N.$ , which agrees with the computed decl. of the sun.

At 4h 0m p.m., l.m.t., with the lat. arcs unchanged, we set off  $14^{\circ}33'N.$  on the decl. arcs and determine a meridian with each solar; which we find to agree with the true meridian within  $1\frac{1}{2}'$  of arc.

As all of the solar observations during the usual hours of solar work come within  $1'30''$  of the true meridian, we conclude that the adjustments of the instruments are satisfactory.

BOUNDARIES OF T.9 N., R.1 W.

Latitudes, departures and closing errors.

Line designated.	True bearing	Distance	Latitudes		Departures	
			N	S.	E.	W.
South boundary (2nd Std. Par. N.)	West	480.00				480.00
West boundary	North	481.42	481.42			
North boundary	East	479.55			479.55	
East boundary (Grand S. R. Meridian)	South	482.80		482.80		
Convergency					.49	
Totals			481.42	482.80	480.04	480.00
				481.42	480.00	
Error in lat.-----			1.38			
Error in dep.-----			0.04			



GENERAL DESCRIPTION.

- SURFACE:** Mountainous. Elevations run from 3500 to 6500 ft. above sea level.
- SOIL:** Sandy and rocky, 3rd and 4th rate.
- UNDERGROWTH:** Oak brush, manzanita, sage brush, laurel, catclaw, mahogany, juniper, cacti, and buck brush.
- TIMBER:** Pinyon, juniper, oak, and cottonwood and ash along creeks.
- EVIDENCE OF MINERAL:** Considerable mining has been done throughout the township. A few small gold miners were at work at the time of this survey, but the larger mines were all shut down.
- WATERING PLACES:** Humbug Creek, with a good stream of water runs southerly thru. the township with several smaller streams emptying into it. Good water is found at Mountain Springs in sec. 28, and at Lame Springs in sec. 11.
- SETTLEMENT:** We found the watchman of the Pacific mine, with a small ranch in sec. 8, one rancher in sec. 9, and one in sec. 4, all on the Forest reserve.
- INDUSTRY:** Grazing and mining are the principal industries.
-



CERTIFICATE OF UNITED STATES SURVEYOR. AND UNITED STATES TRANSITMAN.

We, Glenn F. Sawyer, U.S. Surveyor, and

Wesson Cook, U.S. Transitman,

hereby certify upon honor that, in pursuance

of special instructions received from the U. S. Surveyor General, for Group 129, Arizona,

bearing date of the 10th day of April, 1924, we have well, faithfully, and truly

in our own proper persons, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the

North boundary, and

Subdivision lines of

TOWNSHIP 9 NORTH, RANGE 1 WEST,

of the Gila and Salt

River Base and Meridian, in the State of Arizona,

and by diagram on page 1 hereof the foregoing field notes as having been executed by us, and under our direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions,

and the special written instructions of the U. S. Surveyor General, for Group 129, Arizona,

and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Glenn F. Sawyer

Glenn F. Sawyer

U.S. Surveyor.

Wesson Cook

Wesson Cook

U. S. Transitman  
Phoenix, Arizona  
Oct. 23, 1925

APPROVAL.

San Francisco, Calif.  
Sept. 21, 1925

OFFICE OF THE U.S. Supervisor of Surveys,

Denver, Colorado, June 23, 1926.

The foregoing field notes of the survey of the

North boundary, and

Subdivision lines of

TOWNSHIP 9 NORTH, RANGE 1 WEST,

of the Gila and Salt River Base and Meridian, in the State of Arizona,

executed by Glenn F. Sawyer, U.S. Surveyor, and Wesson Cook, U.S. Transitman,

under the special instructions dated April 10, 1924, for Group 129, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U.S. Supervisor of Surveys

U.S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above described surveys in

has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.