

3721

Book "K"
4-679

OR 16
/

BOOK 3721

FIELD NOTES

OF THE RESURVEY OF THE

Gila and Salt River Meridian, thru Township 8 North, and

South boundary of Township 8 North, Range 1 East,

OF THE SURVEY OF THE

Subdivision lines of

TOWNSHIP 8 NORTH, RANGE 1 EAST,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

Glenn F. Sawyer, U. S. Surveyor,

and

Wesson Cook, U. S. Transitman,

In the capacity of U. S. Surveyors, under Special Instructions dated April 10, 1924, issued by the United States Surveyor General to govern surveys included in Group No. 129, Arizona, which were approved by the Commissioner of the General Land Office, April 29, 1924, and Assignment Instructions dated Oct. 22, 1925.

Resurvey and Survey commenced October 30, 1925.

Resurvey and Survey completed November 20, 1925.

3721

1A

3721

Book "K"

Group 129 - - Arizona.





BOOK 3721

INDEX DIAGRAM.

All Std. sec. cors. on 2nd Std. Par. N. changed to refer to four secs. as described in the field notes in this book.

| | | Township | | | | Range | | | | | | |
|--|----|----------|----|----------|----|----------|----|-------|----|----|----|----|
| | | Second | | Standard | | Parallel | | North | | | | |
| Meridian River Salt and Gila | 18 | 6 | 55 | 5 | 45 | 4 | 38 | 3 | 32 | 2 | 25 | 1 |
| | | 54 | | 53 | | 44 | | 38 | 37 | 31 | 25 | 24 |
| | 18 | | | | 44 | | | | 31 | | | |
| | | 7 | 53 | 8 | | 9 | 37 | 10 | | 11 | 2 | 12 |
| | 17 | | | | 43 | | | | 30 | | | |
| | | 52 | | 52 | | 43 | | 37 | 36 | 30 | | 23 |
| | 16 | | | | | | | | | | | |
| | | 18 | 51 | 17 | 42 | 16 | 36 | 15 | 29 | 14 | 25 | 13 |
| | 15 | | | | | | | | | | | |
| | | 51 | 50 | 50 | | 42 | | 35 | | 29 | | 22 |
| 15 | | | | | | | 35 | | | 22 | | |
| | 19 | 49 | 20 | 41 | 21 | | 22 | 28 | 23 | | 24 | |
| 14 | | | | | | | | | | 21 | | |
| | 19 | 48 | 48 | 41 | 40 | 34 | 34 | | 28 | | 21 | |
| 14 | | | | | | | 34 | | | | | |
| | 30 | 47 | 29 | 40 | 28 | | 27 | 27 | 26 | 20 | 25 | |
| 13 | | | | | | | 33 | | 27 | 26 | 20 | |
| | 47 | 46 | 46 | 40 | 39 | | 33 | | 27 | 26 | 20 | |
| 13 | | | | | | | | | | | | |
| | 31 | | 32 | 39 | 38 | 32 | 34 | 26 | 35 | 19 | 36 | |
| 12 | | | | | | | | | | | | |
| | 10 | 9 | 9 | 8 | 8 | 7 | 7 | 6 | 6 | 5 | 5 | 4 |


T. 8 N. R. 1 E.

-  Surveyed under this group.
-  Resurveyed under this group.
-  Accepted surveys.
-  Areas surveyed as per accepted plats on file.

Book "K"
Group 129 - Arizona

Township 8 North - Range 1 East

DATE DIAGRAM
1925

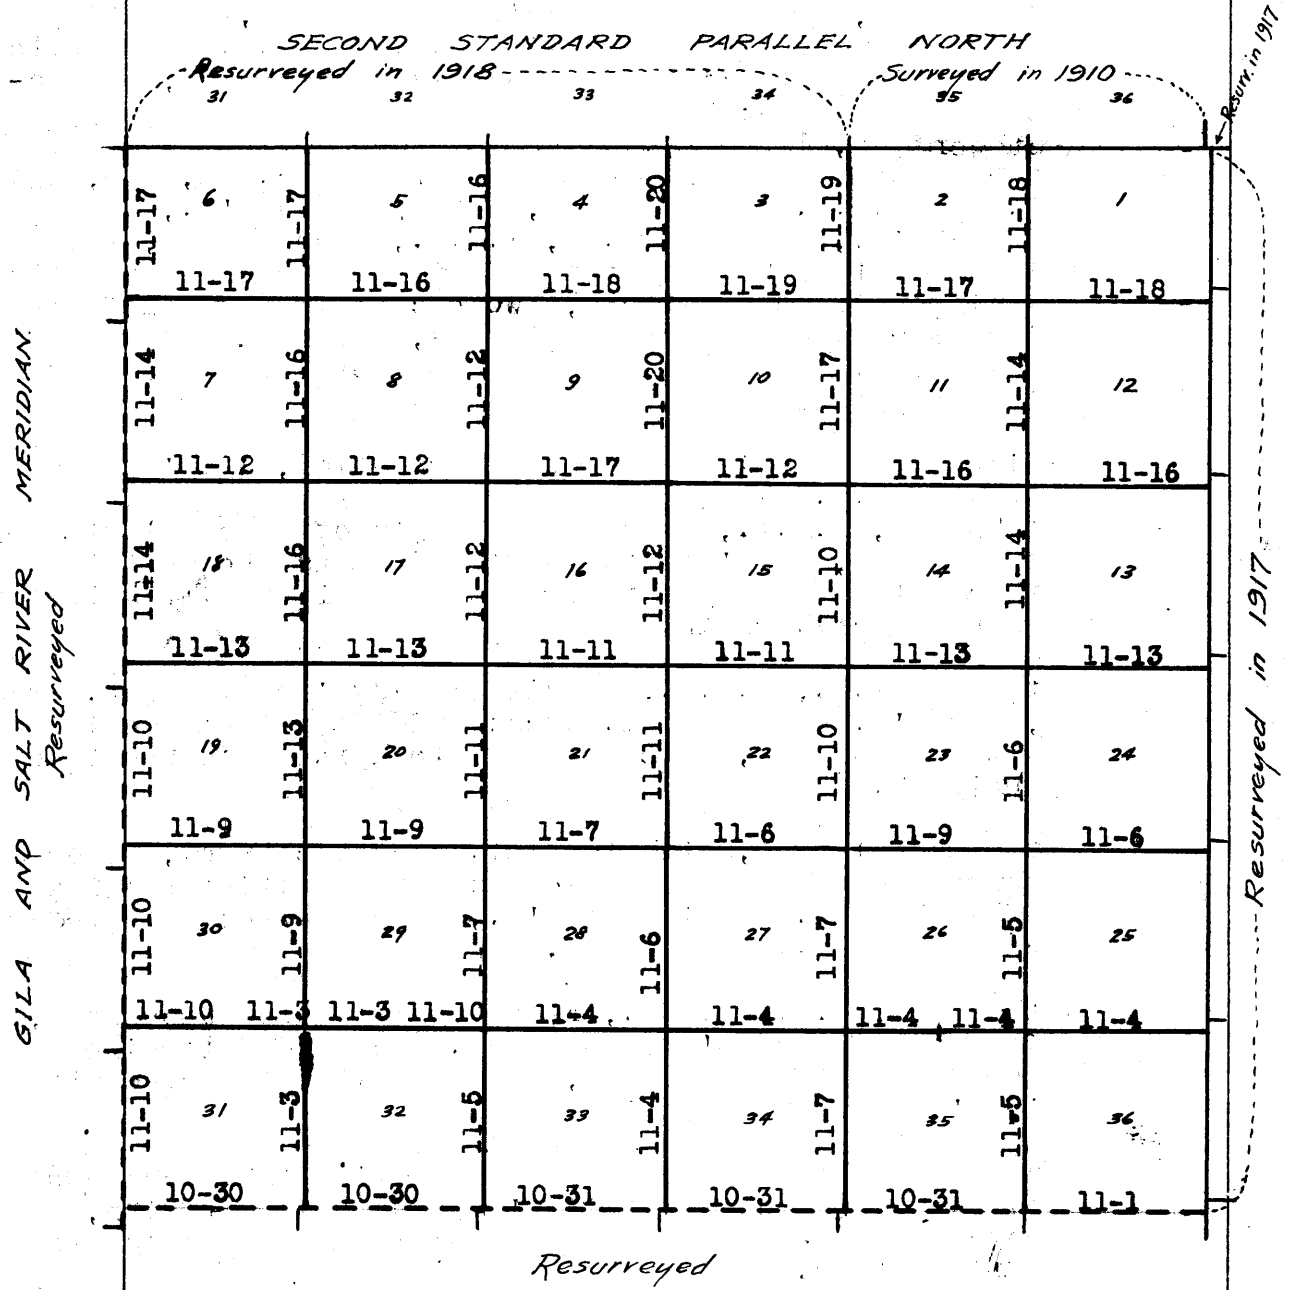

- Surveyed by Glenn F. Sawyer, U.S.S. on dates shown thereon
- Resurveyed by Glenn F. Sawyer, U.S.S. on dates shown thereon.
- Surveyed by Wesson Cook, U.S. Transitman, on dates shown thereon.
- Resurveyed by Wesson Cook, U.S. Transitman, on dates shown thereon.
- Accepted surveys or resurveys.

Retracements, Resurveys and Surveys herein described- were executed on dates shown on diagram on page 1 hereof, by Glenn F. Sawyer, U. S. Surveyor and Wesson Cook, U. S. Transitman, using respectively, Young and Sons light mountain transits No's 8478 and 8487, each equipped with full vertical circle and Smith solar attachment; unless otherwise specified, all azimuth determinations are accomplished with the solar attachment.

October 27, 1925: We examine the adjustments of the transits and correct all errors; then, to test the solar apparatus, by comparing their indications, resulting from observations made during a.m. and p.m. hours with a meridian established by Polaris observation, we proceed as follows:

October 28, 1926:

At camp near the north east corner of sec. 31, T8N, R1E., G. and S.R.B. and meridian, latitude $34^{\circ}00'N.$, longitude $112^{\circ}17\frac{1}{2}'W.$, at 5h 0m a.m., l.m.t., Wesson Cook, with instrument 8487, observes Polaris at western elongation, making four observations, two each with the telescope in direct and reversed positions, and mark the mean point in line thus determined on a peg driven firmly in the ground 5 chs. northerly.

Azimuth of Polaris at western elongation, $1^{\circ}19'$
a.m.

At 7h 45m, l.m.t., Wesson Cook lay's off the azimuth of Polaris, $1^{\circ}19'$ to the east and marks the meridian thus determined by a tack in a peg driven firmly in the ground 5 chs. North.

At 8h 0m a.m., l.m.t., we set off $34^{\circ}0'$ on the lat. arcs, $13^{\circ}43'S.$ on the decl. arcs; and determine a meridian with the solars, which we find to agree with the true meridian.

At apparent noon, with the lat. arcs unchanged, we observe the sun on the meridian; the resulting reading of each decl. arc is $13^{\circ}47'S.$, which agrees with the computed decl. of the sun.

At 4h 0m., p.m., l.m.t., with the lat. arcs unchanged, we set off $13^{\circ}49\frac{1}{2}'$ on the decl. arcs and determine a meridian with each solar, which we find to agree with in 1' of the true meridian.

As all of the solar observations during the usual hours of solar work come within 1' of the true meridian, we conclude that the adjustments of the instruments are satisfactory.

Unless otherwise specified, all measurements are made with Lufkin steel tapes, 5 chs. in length, compared with a Lufkin steel standard tape, 1 ch. in length, and found correct. The measurements are made on the slope, the vertical angle determined and the slope measurements properly reduced to true horizontal distances.

Resurvey of South boundary of Township 8 North, Range 1 East. 3

| Chains. | |
|---------|---|
| | <p>The South boundary of T.8 N. R.1 E. was surveyed by A.T. Colton, U.S.D.S. in 1894, establishing all cors. thereon with a common reference to areas on both sides of the line.</p> <p>No retracement or resurvey of any part of this township boundary is of record.</p> <p>The following notes describe a resurvey of the entire line, reconstructing the $\frac{1}{4}$ sec. cor. of secs. 1 and 36, and the cor. of secs. 1, 2, 35 and 36, retaining their original common reference; reconstructing existing cors. in original positions and reestablishing missing cors. at proportional intervals, and changing them to refer to areas S. of line only in the west 5 miles of this boundary, and reestablishing a set of cors. referring to areas N. of line only at intervals of 40.00 chs. in westing, counting from the reconstructed cor. of secs. 1, 2, 35 and 36.</p> |
| | <p>-----</p> <p><u>Retracement for Resurvey.</u></p> |
| 39.50 | <p>From the closing cor. of Ts. 7 and 8 N., R. 1 E. on the Gila and Salt River Meridian, hereinafter described, East, on random line on N. bdy. of sec. 6, T. 7 N., R. 1 E. ($W. \frac{1}{2}$). Fall 10 lks. N. of the original $\frac{1}{4}$ sec. cor. of secs. 6 and 31, hereinafter described.</p> <p>True course and distance of $W. \frac{1}{2}$ of N. bdy. of sec. 1 are therefore N. 89° 51' W., 39.50 chs.</p> |
| 40.10 | <p>Thence, East, on random line, on N. bdy. of sec. 6 ($E. \frac{1}{2}$). Fall 7 lks. N. of the original cor. of secs. 5, 6, 31 and 32, hereinafter described.</p> <p>True course and distance of $E. \frac{1}{2}$ of N. bdy. of sec. 1 are therefore, N. 89° 54' W., 40.10 chs.</p> |
| 39.75 | <p>-----</p> <p>East, on a random line on N. bdy. of sec. 5 ($W. \frac{1}{2}$). Fall 2 lks. S. of the original $\frac{1}{4}$ sec. cor. of secs. 6 and 31, hereinafter described.</p> <p>True course and distance of $W. \frac{1}{2}$ of N. bdy. of sec. 2 are therefore S. 89° 58' W., 39.75 chs.</p> |
| 40.06 | <p>Thence, East, on random line, on N. bdy. of sec. 5 ($E. \frac{1}{2}$). Fall 19 lks. N. of the original cor. of secs. 4, 5, 32 and 33, hereinafter described.</p> <p>True course and distance of $E. \frac{1}{2}$ of N. bdy. of sec. 2 are therefore N. 89° 44' W., 40.06 chs.</p> |
| 40.00 | <p>-----</p> <p>East, on random line on N. bdy. of sec. 4. Diligent search in this vicinity fails to reveal any trace of the original $\frac{1}{4}$ sec. cor. of secs. 4 and 33. Set temp. cor., and continue line and measurement.</p> |
| 79.74 | <p>Fall 21 lks. N. of the original cor. of secs. 3, 4, 33 and 34, hereinafter described.</p> <p>True course and distance of N. bdy. of sec. 4 are therefore N. 89° 51' W., 79.74 chs.</p> |
| 40.00 | <p>-----</p> <p>East, on random line, on N. bdy. of sec. 3 ($W. \frac{1}{2}$). Fall 22 lks. S. of the original $\frac{1}{4}$ sec. cor. of secs. 3 and 34, hereinafter described.</p> <p>True course and distance of $W. \frac{1}{2}$ of N. bdy. of sec. 3 are therefore S. 89° 41' W., 40.00 chs.</p> |
| 39.61 | <p>Thence, East, on a random line on N. bdy. of sec. 3 ($E. \frac{1}{2}$). Fall 19 lks. S. of the original cor. of secs. 2, 3, 34 and 35, hereinafter described.</p> |

4 Resurvey of South bdy. of Township 8 North, Range 1 East.

Chains.

True course and distance of E. 1/2 of N. bdy. of sec. 3 are therefore, S. 89° 44' W., 39.61 chs.

40.10 East, on random line, on N. bdy. of sec. 2 (W. 1/2). Fall 1 lk. S. of the original 1/4 sec. cor. of secs. 2 and 35, hereinafter described. True course and distance of W. 1/2 of N. bdy. of sec. 2 are therefore S. 89° 59' W., 40.10 chs.

41.47 Thence, East, on random line, on N. bdy. of sec. 2 (E. 1/2). Fall 18 lks. N. of the original cor. of secs. 1, 2, 35 and 36, hereinafter described. True course and distance of E. 1/2 of N. bdy. of sec. 2 are therefore N. 89° 45' W., 41.47 chs.

39.75 Thence, East, on random line, bet. secs. 1 and 36 (W. 1/2). Fall 67 lks. S. of the original 1/4 sec. cor. of secs. 1 and 36, hereinafter described. True course and distance of W. 1/2 of line, bet. secs. 1 and 36, are therefore S. 89° 02' W., 39.76 chs.

40.11 Thence, East, on random line, bet. secs. 1 and 36 (E. 1/2). Fall 42 lks. S. of the cor. of Ts. 7 and 8 N., R. 1 E., hereinafter described. True course and distance of E. 1/2 of line, bet. secs. 1 and 36 are therefore, S. 89° 24' W., 40.11 chs.

RESURVEY.

The cor. of Ts. 7 and 8 N., R. 1 E. is a granite stone, 16x10 x8 ins., firmly set in mound of stone, marked with 6 notches on each of N., S. and W. faces. No accessories. This originally was a cor. of four townships, but was changed to its present reference in 1910, when the N. bdy. of T. 7 N., R. 2 E. was closed against the E. bdy. of T. 8 N., R. 1 E. at 6.12 chs. N. of this cor., and a closing cor. of Ts. 7 and 8 N., R. 2 E. established.

21.72 Thence, S. 89° 24' W., on true line, bet. secs. 1 and 36 (E. 1/2). Over mountainous land, thru. scattering undergrowth. Ascend 127 ft., over E. slope. Ridge, brs. N. 20° W. and S.

40.11 Descend 128 ft., over W. slope, to, The original 1/4 sec. cor. of secs. 1 and 36, which is a stone, 10x12x5 ins. above ground, marked 1/4 S on N. face. No accessories. Reconstruct this cor. monument as follows: Alongside of old stone, set an iron post 3 ft. long, 1 in. in diam., 27 ins. in the ground for 1/4 sec. cor. of secs. 1 and 36, marked on brass cap,

1/4 S 36
S 1
1925


No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

8.13 Thence, S. 89° 02' W., on true line, bet. secs. 1 and 36 (W. 1/2). Over mountainous land, thru. scattering undergrowth. Descend 56 ft. over W. slope. Boulder Creek, with stream of water, 2 lks. wide, 2 ins. deep, course S.

Resurvey of South bdy. of Township 8 North, Range 1 East. 5


Chains.

39.76 Ascend 335 ft., over SE. slope, to
 Intersect the original cor. of secs. 1, 2, 35 and 36, which
 is a stone, 14x12x8 ins. above ground, marked with 5
 notches on W. face, and 1 notch on E. face, and witnessed
 by mound of stone 2 ft. base, 1 1/2 ft. high, W. of cor. Re-
 construct this cor. monument as follows:
 Alongside of old stone, set an iron post, 3 ft. long, 2
 ins. in diam., 27 ins. in the ground, for cor. of secs. 1,
 2, 35 and 36, marked on brass cap,




No bearing trees available.
 Land, mountainous.
 Soil, rocky and sandy, 3rd and 4th rate.
 Timber, none.
 Undergrowth, scrub palo verde, mesquite and cacti.

N. 89° 45' W., on true line, on S. bdy. of sec. 35.
 Over mountainous land, thru. scattering undergrowth.
 10.97 Ascend 91 ft., along S. slope.
 Wash, 10 lks. wide, course SE.
 36.17 Ascend 252 ft., over SE. slope.
 Ravine, 6 lks. wide, course SE.
 40.00 Ascend 154 ft., over E. slope, to
 Set an iron post, 3 ft. long, 1 in. in diam., on surface
 rock, deposit a stone marked with a cross (x) at base
 of post, and raise a mound of stone around post, for
 reestablished 1/4 sec. cor. of sec. 35 only, marked on brass
 cap,



41.47 No bearing trees available. Asc. 15 ft., over E. slope, to
 Intersect the original 1/4 sec. cor. of secs. 2 and 35, which
 is a stone 6x6x6 ins. above ground, marked 1/4 on N. face.
 No accessories. Reconstruct this cor. monument as follows:
 Alongside of old stone, set an iron post, 3 ft. long, 1 in.
 in diam., on bed rock, deposit a stone marked with a
 cross (x) at base of post, and raise a mound of stone
 around post, for 1/4 sec. cor. of sec. 2 only, marked on
 brass cap,



No bearing trees available.
 Thence,
 S. 89° 59' W., on true line, continuing measurement of S. bdy. of
 sec. 35. Asc. 41 ft., over NE. slope.
 42.47 Spur, slopes SE. Desc. 21 ft., over SW. slope.
 44.07 Draw, course SE. Asc. 141 ft. over SE. slope.
 49.64 Low ridge, brs. N. and S.
 Descend 55 ft. over SW. slope.
 50.37 Rocky pillar on line, 40 ft. high.
 59.80 Ravine, course S. 20° W. Asc. 131 ft. over E. slope.
 63.67 Spur, slopes S. 25° W. Desc. 127 ft., over W. slope.
 67.47 Ravine, course SW. Asc. 25 ft., over SE. slope.
 71.37 Spur, slopes SW. Desc. 250 ft., over W. slope, to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the
 ground to bed rock, deposit a stone marked with a cross
 (x) at base of post, and raise a mound of stone around
 post for reestablished cor. of secs. 34 and 35 only,
 marked on brass cap,

BOOK 3721

6 Resurvey of South bdy. of Township 8 North, Range 1 East.

Chains.

| | |
|-----|-----|
| T8N | R1E |
| S34 | S35 |

S 2
T7N
1925

No bearing trees available.
Land, mountainous.
Soil, sandy and rocky, 3rd rate.
Timber, none.
Undergrowth, scrub palo verde, mesquite and cacti.

- 1.57 S. 89°59'W., on true line on S. bdy. of sec. 34.
Over mountainous land, thru scattering undergrowth.
Descend 30 ft., over W. slope, to
(40.10 chs. S. 89°59'W. from cor. of secs. 1, 2, 35 and 36) Intersect the original cor. of secs. 2, 3, 34 and 35, which is a stone 12x12x8 ins. above ground, marked with 2 notches on E. face, and 4 notches on W. face. No accessories. Reconstruct this cor. monument as follows:
Alongside of old stone set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bed rock, deposit a stone marked with a cross (x) at base of post, and raise mound of stone around post for cor. of secs. 2 and 3 only, mkd. on brass cap,

| | |
|------|-----|
| T8N | R1E |
| S34 | |
| S 3 | S 2 |
| T7N | |
| 1925 | |

- No bearing trees available.
Thence,
S. 89°44'W., on true line, continuing measurement of S. bdy. of sec. 34.
Over rolling land, thru scattering undergrowth.
Descend slightly over W. slope.
1.98 Wash, 10 lks. wide, course S.
Ascend 14 ft., over SE. slope.
5.18 Spur, slopes SW.
Descend 305 ft., over W. slope, to
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 34 only, marked on brass cap,

| | |
|-----------------|----|
| $\frac{1}{4}$ S | 34 |
| 1925 | |

- No bearing trees available.
Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
Descend 10 ft. over W. slope, to
41.18 (39.61 chs. S. 89°44'W. of cor. of secs. 2 and 3) Intersect the original $\frac{1}{4}$ sec. cor. of secs. 3 and 34, which is a stone 12x12x12 ins. above ground, marked $\frac{1}{4}$ on N. face, and witnessed by a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor. Reconstruct this cor. monument as follows:
Alongside of old stone, set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 3 only, marked on brass cap,

| | |
|-----------------|---|
| $\frac{1}{4}$ S | 3 |
| 1925 | |

Destroy old mound N. of cor.
Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, S. of cor.
Thence,
S. 89°41'W., on true line, continuing measurement of S. bdy. of sec. 34.
Descend slightly over W. slope.

Resurvey of South bdy. of Township 8 North, Range 1 East. 7

Chains.
41.78 Wash, 10 lks. wide, course S. 45° W. Desc. 22 ft. over SW. slope.
48.52 Wash, 10 lks. wide, course S. 20° W. Asc. 58 ft. over E. slope.
62.88 Spur, slopes S. Desc. 45 ft., over W. slope, to
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for reestablished cor. of secs. 33 and 34 only, marked on brass cap,

T8N R1E
S33 | S34

S 3
T7N
1925

No bearing trees available. Raise a mound of stone 3 ft. base, 2 ft. high, N. of cor.

Land, rolling.

Soil, gravelly and rocky, 3rd rate.

Timber, none.

Undergrowth, scrub palo verde, mesquite and cactus.

1.18 S. 89° 41' W. on true line, on S. bdy. of sec. 33.
Over rolling land, thru scattering undergrowth.
Descend 8 ft., over W. slope, to
(40.00 chs. S. 89° 41' W. from $\frac{1}{4}$ sec. cor. of sec. 3)
Intersect the original cor. of secs. 3, 4, 33 and 34, which is a stone, 7x12x6 ins. above ground, marked with 3 notches on each of E. and W. faces, and witnessed by mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor. Reconstruct this cor. monument as follows:
Alongside of old stone, set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 3 and 4 only, marked on brass cap,

T8N R1E
S33

S 4 | S 3
T7N
1925

No bearing trees available.

Destroy old mound of stone N. of cor.

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, S. of cor.

Thence,

N. 89° 51' W., on true line, continuing measurement of S. bdy. of sec. 33.

4.20 Descend 25 ft. over W. slope.
Bonita Creek (dry) 50 lks. wide, course S.

Ascend 133 ft., over E. slope.

35.04 Low ridge, brs. N. and S. Desc. 28 ft., over W. slope, to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground to bed rock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone around post, for reestablished $\frac{1}{4}$ sec. cor. of sec. 33 only, marked on brass cap,

$\frac{1}{4}$ S 33

1925

No bearing trees available.

41.05 Descend 6 ft., over W. slope, to
(Midpoint of N. bdy. of sec. 4) Set an iron post, 3 ft. long 1 in. in diam., 10 ins. in the ground to bed rock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone around post, for reestablished $\frac{1}{4}$ sec. cor. of sec. 4 only, marked on brass cap,

$\frac{1}{4}$ S 4

1925

No bearing trees available.

Descend 22 ft., over W. slope, to

BOOK 3721

8 Resurvey of South bdy. of Township 8 North, Range 1 East.

mains.

- 43.08 Wash, 15 lks. wide, course S.
Ascend 89 ft., over E. slope.
- 60.02 Spur, slopes S. Enter mountainous land.
Descend 118 ft., over W. slope.
- 76.55 Wash, 20 lks. wide, course S.
Ascend 89 ft., over E. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 22 ins. in the ground to bed rock, deposit a stone, marked with a cross (x) at base of post, and raise a mound of stone around post, for reestablished cor. of secs. 32 and 33 only, marked on brass cap,

T8N R1E
S32 | S33

S 4
T7N
1925

No bearing trees available.
Land, rolling and mountainous.
Soil, rocky and gravelly sand, 3rd rate.
Timber, none.
Undergrowth, scrub palo verde, greasewood and cacti.

- 0+92 N. 89° 51' W., on true line, on S. bdy. of sec. 32.
Over rolling land, thru scattering undergrowth.
Ascend 10 ft., over E. slope, to
(39.87 chs. N. 89° 51' W., from $\frac{1}{4}$ sec. cor. of sec. 4) Intersect the original cor. of secs. 4, 5, 32 and 33, which is a granite stone, 16x10x8 ins., marked with 2 notches on W. face, and 4 notches on E. face, and firmly set in a mound of stone. No accessories. Reconstruct this cor. monument as follows: Remove the mound of stone, and in center of its position, reset old cor. stone, 10 ins. in the ground, and alongside same set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground for cor. of secs. 4 and 5 only, marked on brass cap,

T8N R1E
S32

S 5 | S 4
T7N
1925

No bearing trees available. Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, S. of cor.

- Thence,
N. 89° 44' W., on true line, continuing measurement of S. bdy. of sec. 32.
Ascend 64 ft., over E. slope.
- 10.28 Low ridge, brs. N. 20° W. and S. Road on ridge, brs. N. 20° W. to Brown's ranch, and S. to Marinette.
Descend 77 ft. over W. slope.
- 20.58 Wash, 10 lks. wide, course S. 20° W.
Ascend 120 ft., over SE. slope, to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 32 only, marked on brass cap,

$\frac{1}{4}$ S 32

1925

- No bearing trees available.
Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
Ascend slightly over SE. slope.
- 40.68 Spur, slopes S. Desc. slightly over SW. slope, to
- 40.98 (40.06 chs. N. 89° 44' W., from cor. of secs. 4 and 5) Intersect the original $\frac{1}{4}$ sec. cor. of secs. 5 and 32, which is a granite stone, 16x10x10 ins., marked $\frac{1}{4}$ on N. face, and firmly set in a mound of stone. No accessories. Reconstruct this cor. monument as follows:

Resurvey of South bdy. of Township 8 North, Range 1 East. 9

chains.

Remove the mound of stone, and in center of its position, reset old corner stone, 10 ins. in the ground, and alongside same set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 5 only, marked on brass cap,

| | |
|------|---|
| 48 | 5 |
| 1925 | |

No bearing trees available.

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, S. of cor. Thence,

S. 89° 58' W., on true line, continuing measurement of S. bdy. of sec. 32.

Descend 91 ft., over SW. slope.

52.73 Wash, 6 lks. wide, course S. 20° E.

Ascend 61 ft., over E. slope.

56.50 Spur, slopes S. 20° W.

Descend 100 ft., over W. slope.

67.93 Draw, 6 lks. wide, course SW.

Ascend 30 ft., over SE. slope.

77.33 Spur, slopes SW. Desc. 14 ft., over NW. slope, to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground for reestablished cor. of secs. 31 and 32 only, marked on brass cap,

| | |
|------|-----|
| T8N | R1E |
| S31 | S32 |
| S 5 | |
| T7N | |
| 1925 | |

No bearing trees available.

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor. Land, rolling.

Soil, rocky and gravelly, 3rd rate.

Timber, none.

Undergrowth, scrub palo verde and mesquite, greasewood, ocotillo and cacti.

S. 89° 58' W., on true line, on S. bdy. of sec. 31.

Over rolling land, thru. scattering undergrowth.

Descend slightly over NW. slope, to

0.73 (39.75 chs. S. 89° 58' W. from $\frac{1}{4}$ sec. cor. of sec. 5) Intersect the original cor. of secs. 5, 6, 31 and 32, which is a stone, 12x10x4 ins. above ground, marked with 5 notches on E. face and 1 notch on W. face, and witnessed by a mound of stone, N. of cor. Reconstruct this cor. monument as follows: Alongside of old stone, set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bed rock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone around post, for cor. of secs. 5 and 6 only, marked on brass cap,

| | |
|------|-----|
| T8N | R1E |
| S31 | S 5 |
| S 6 | |
| T7N | |
| 1925 | |

No bearing trees available.

Destroy old mound of stone N. of cor. Raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

Thence, N. 89° 54' W., on true line, continuing measurement on S. bdy. of sec. 31.

Descend 119 ft., over NW. slope.

21.52 Humbug Creek, with stream of water, 2 lks. wide, course S. Ascend 55 ft., over E. slope.

BOOK 3721

10 Resurvey of South bdy. of Township 8 North, Range 1 East.

Chains.

22.70 Spur, slopes S. Desc. 11 ft., over W. slope.
 26.12 Wash, 30 lks. wide, course S. Asc. 168 ft., over E. slope.
 38.20 Spur, slopes S. Desc. 22 ft., over W. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bed rock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone around post, for reestablished $\frac{1}{4}$ sec. cor. of sec. 31 only, marked on brass cap,

$\frac{1}{4}$ S 31
 1925

No bearing trees available.

40.83 Descend slightly over W. slope, to
 (40.10 chs. N. $89^{\circ}54'$ W. from cor. of secs. 5 and 6) Intersect the original $\frac{1}{4}$ sec. cor. of secs. 5 and 31, which is a stone 16x10x6 ins. above ground, marked $\frac{1}{4}$ on N. face, and witnessed by a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor. Reconstruct this cor. monument as follows:

Alongside old stone, set an iron post 3 ft. long, 1 in. in diam., 6 ins. in the ground to bed rock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor. of sec. 6 only, marked on brass cap,

$\frac{1}{4}$ S 6
 1925

No bearing trees available.

Destroy old mound of stone N. of cor. Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, S. of cor.

Thence,

N. $89^{\circ}51'$ W., on true line, continuing measurement of S. bdy. of sec. 31.

47.33 Descend 46 ft., over W. slope.
 Wash, 15 lks. wide, course S.
 Ascend 124 ft., over E. slope.
 55.83 Spur, slopes S. Desc. 133 ft., over W. slope.
 66.10 Wash, 30 lks. wide, course S. 20° E.
 Ascend 20 ft., over NE. slope, to

80.33 Intersect the closing cor. of Ts. 7 and 8 N., R. 1 E. on the G. and S. R. Meridian, which is a granite stone 36x24x10 ins. above ground, marked with 6 notches and CC on E. face, and 6 notches on each of N. and S. faces. No accessories.

Reconstruct this cor. monument as follows: Alongside old stone, set an iron post, 3 ft. long, 3 ins. in diam., 27 ins. in the ground, for closing cor. of Ts. 7 and 8 N., R. 1 E., marked on brass cap,

T8N | T8N
 | R1E
 S36 | S31 CC
 RLW | S 6
 | T7N
 1925

No bearing trees available.

Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.

Land, rolling.

Soil, rocky and gravelly, 3rd rate.

Timber, none.

Undergrowth, scrub palo verde and mesquite, greasewood, ocotillo and cacti.

Resurvey of Gila and Salt River Meridian, thru. Township 8 North. 11
Chains.

The Gila and Salt River Meridian, thru. T. 8 N., was surveyed by J.B. McLaughlin, U.S.D.S. in 1883, establishing all cors. thereon with a common reference to areas both sides of the line.
In 1916, C.M. Pidgeon, U.S. Surveyor made an independent resurvey of this line, reestablishing all cors. thereon, retaining their original reference, and destroying all evidence of the original cor. monuments.

The following notes describe a resurvey of the Meridian thru. T. 8 N., reestablishing thereon a set of $\frac{1}{4}$ sec. cors. referring to quarters of secs. in T. 8 N., R. 1 E. only, and altering the previously reestablished $\frac{1}{2}$ sec. & $\frac{1}{4}$ sec. cors. to refer to areas W. of line only.
The reestablished $\frac{1}{4}$ sec. cors. of the W. range of secs. in T. 8 N., R. 1 E. are set on the meridian at mid-points between closing cors. of said secs., with the exception of secs. 6 and 31 of said Tp., which were established at 40.00 chs. in northing and southing, respectively, from the C.C. of secs. 6 and 7, and C.C. of secs. 30 and 31.

RETRACEMENT FOR RESURVEY.

The cor. of Ts. 7 and 8 N. R. 1 W. is a granite stone, 24x12 x6 ins. above ground, firmly set and marked with 6 notches on each of N. S. and W. faces. No accessories. This was originally established in 1883 as a cor. of four townships, but was changed to its present designation in 1894 by A.T. Colton, U.S.D.S., when he established closing cor. of Ts. 7 and 8 N., R. 1 E. at 10 chs. N. of this cor.

- Thence,
N. 0° 6' E., on random line on E. bdy. of sec. 36, T. 8 N., R. 1 W. (S. $\frac{1}{2}$).
- 10.00 Intersect the closing cor. of Ts. 7 and 8 N., R. 1 E., hereinbefore described.
- Continue line and measurement.
- 40.00 Intersect the reestablished $\frac{1}{4}$ sec. cor. of secs. 31 and 36, hereinafter described.
True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec. 36 are therefore N. 0° 6' E., 40.00 chs.
- Thence,
N. 0° 6' E., on random line on E. bdy. of sec. 36 (N. $\frac{1}{2}$).
- 40.07 Intersect the reestablished cor. of secs. 25, 30, 31 and 36, hereinafter described.
True course and dist. of N. $\frac{1}{2}$ of E. bdy. of sec. 36 are therefore, N. 0° 6' E., 40.07 chs.
-
- N. 0° 6' E., on random line on E. bdy. of sec. 25 (S. $\frac{1}{2}$).
- 40.28 Intersect the reestablished $\frac{1}{4}$ sec. cor. of secs. 25 and 30, hereinafter described.
True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec. 25 are therefore N. 0° 6' E., 40.28 chs.
- Thence,
N. 0° 6' E., on random line on E. bdy. of sec. 25 (N. $\frac{1}{2}$).
- 40.29 Intersect the reestablished cor. of secs. 19, 24, 25 and 30, hereinafter described.
True course and dist. of N. $\frac{1}{2}$ of E. bdy. of sec. 25 are therefore N. 0° 6' E., 40.29 chs.
-
- N. 0° 6' E., on random line on E. bdy. of sec. 24 (S. $\frac{1}{2}$).
- 39.74 Intersect the reestablished $\frac{1}{4}$ sec. cor. of secs. 19 and 24, hereinafter described.

12. Resurvey of Gila and Salt River Meridian, thru. Township 8 North.

| | |
|---------|---|
| chains. | True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec. 24 are therefore, N. 0° 6' E., 39.74 chs. |
| 40.04 | Thence, N. 0° 6' E., on random line, on E. bdy. of sec. 24 (N. $\frac{1}{2}$). Intersect the reestablished cor. of secs. 13, 18, 19 and 24, hereinafter described. True course and dist. of N. $\frac{1}{2}$ of E. bdy. of sec. 24 are therefore N. 0° 6' E., 40.04 chs. |
| 40.04 | N. 0° 6' E., on random line, on E. bdy. of sec. 13 (S. $\frac{1}{2}$). Intersect the reestablished $\frac{1}{4}$ sec. cor. of secs. 13 and 18, hereinafter described. True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec. 13 are therefore, N. 0° 6' E., 40.04 chs. |
| 40.19 | Thence, N. 0° 6' E., on random line, on E. bdy. of sec. 13 (N. $\frac{1}{2}$). Intersect the reestablished cor. of secs. 7, 12, 13 and 18, hereinafter described. True course and dist. of N. $\frac{1}{2}$ of E. bdy. of sec. 13 are therefore N. 0° 6' E., 40.19 chs. |
| 39.90 | N. 0° 6' E., on random line, on E. bdy. of sec. 12 (S. $\frac{1}{2}$). Intersect the reestablished $\frac{1}{4}$ sec. cor. of secs. 7 and 12, hereinafter described. True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec. 12, are therefore, N. 0° 6' E., 39.90 chs. |
| 40.20 | Thence, N. 0° 6' E., on random line, on E. bdy. of sec. 12 (N. $\frac{1}{2}$). Intersect the reestablished cor. of secs. 1, 6, 7 and 12, hereinafter described. True course and dist. of N. $\frac{1}{2}$ of E. bdy. of sec. 12 are therefore N. 0° 6' E., 40.20 chs. |
| 40.03 | N. 0° 6' E., on random line, on E. bdy. of sec. 1 (S. $\frac{1}{2}$). Intersect the reestablished $\frac{1}{4}$ sec. cor. of secs. 1 and 6, hereinafter described. True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec. 1 are therefore, N. 0° 6' E., 40.03 chs. |
| 36.03 | Thence, N. 0° 6' E., on random line, on E. bdy. of sec. 1 (N. $\frac{1}{2}$). Intersect the original cor. of Ts. 8 and 9 N., Rs. 1 E. and 1 W., hereinafter described. True course and dist. of N. $\frac{1}{2}$ of E. bdy. of sec. 1 are therefore, N. 0° 6' E., 36.03 chs. |


RESURVEY.

From the reconstructed closing cor. of Ts. 7 and 8 N., R. 1 E., hereinbefore described,
N. 0° 6' E., on true line on W. bdy. of sec. 31.
Over rolling land, thru. scattering undergrowth.
Descend slightly.
6.00 Ascend 35 ft., to
10.00 Thence along E. slope.
15.00 Descend 80 ft., to
22.00 Thence along E. slope.
30.00 (40.00 chs. N. 0° 6' E. from cor. of Ts. 7 and 8 N., R. 1 W.)
Intersect the reestablished $\frac{1}{4}$ sec. cor. of secs. 31 and 36, which is an iron post, 1 in. in diam., projecting 26 ins. above ground, firmly set in ground and mound of stone,

Resurvey of Gila and Salt River Meridian thru Township 8 North. 13

Chains.

properly marked on brass cap, and witnessed by mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor. No bearing trees. Alter this cor. monument to refer to the quarters of sec. 36 only, by changing marking on brass cap to read




No bearing trees available. No change in accessory is required.

Continue line and measurement, Continue along E. slope.

33.00 Cow Creek, course SE.


40.88 Ascend 70 ft., over SW. slope, to (40.00 chs. S. 0° 6' W., from C.C. of secs. 30 and 31), Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 31 only, marked on brass cap,



No bearing trees available. Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

62.17 Ascend 131 ft., over SW. slope, to Spur, slopes SE.

70.07 Ascend gradually over E. slope, to (40.07 chs. N. 0° 6' E. from 1/4 sec. cor. of sec. 36), Intersect the reestablished cor. of secs. 25, 30, 31 and 36, which is an iron post, 3 ins. in diam., projecting 18 ins. above ground, firmly set in ground and mound of stone, properly marked on brass cap, and witnessed by a mound of stone 2 ft. base, 1 1/2 ft. high, W. of cor. No bearing trees. Alter this cor. monument to refer to secs. 25 and 36 only, by changing markings on brass cap to read,



No bearing trees available. Ascend slightly over E. slope, to Enter mountainous land.

73.47 Descend 88 ft., over NE. slope.

78.10 Bottom of gulch, course E.

80.88 Ascend 40 ft., over S. slope, to

Intersect the sectional correction line surveyed due west thru. T. 8 N., R. 1 E. Closing cor. of secs. 30 and 31, established at this point, as hereinafter described.

Land, rolling and mountainous.

Soil, granite and malpais formation, 4th rate.

Timber, none.

Undergrowth, scrub palo verde, cacti and catclaw.

From the closing cor. of secs. 30 and 31, N. 0° 6' E., on true line, on W. bdy. of sec. 30. Over mountainous land, thru. scattering undergrowth. Ascend 44 ft., over S. slope.

7.37 Spur, slopes E.

12.30 Descend 63 ft., over N. slope.

Draw, course SE. Asc. 126 ft., over SE. slope.

14 Resurvey of Gila and Salt River Meridian, thru. Townshi¹/₄ 8 North.

Chains.

- 28.83 Spur, slopes E. Enter rolling land. Desc. slightly over NE. slope, to
- 29.47 (40.28 chs. N.0°6'E., of the cor. of secs. 25 and 30) Intersect the reestablished $\frac{1}{4}$ sec. cor. of secs. 25 and 30, which is an iron post, 1 in. in diam, projecting 10 ins above ground, firmly set, properly marked on brass cap, and witnessed by a mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. No bearing trees.
Alter this cor. monument to refer to the quarters of sec. 25 only, by changing marking on brass cap, to read
- $\frac{1}{4}$
S25
1915-25
- No bearing trees available. No change in accessory is required.
Descend gradually over NE. slope.
- 31.62 Draw, course E.
Ascend gradually over E. slope, to
- 40.04 (Midpoint of W. bdy. of sec. 30) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 30 only, marked on brass cap,
- S 30
1925
- No bearing trees available. Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, E. of cor.
Descend 36 ft., over NE. slope, to
- 48.95 Draw, 10 lks. wide, course SE.
Ascend gradually over SW. slope, to
- 58.05 Same draw, course SW. Asc. 26 ft., over SE. slope, to
- 61.53 Same draw, course SE. Enter mountainous land.
Ascend 121 ft., over S. slope, to
- 69.76 (40.29 chs. N.0°6'E. from $\frac{1}{4}$ sec. cor. of sec. 25), Intersect the reestablished cor. of secs. 19, 24, 25 and 30, which is an iron post, 3 ins. in diam., projecting 36 ins. above ground, firmly set in a mound of stone, properly marked on brass cap, and witnessed by a mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. No bearing trees.
Alter this cor. monument to refer to secs. 24 and 25 only, by changing markings on brass cap to read
- T8N
RLW
S24
S25
1915-25
- No change in accessory is required.
Ascend 265 ft., over steep S. slope.
- 74.22 Fence, brs. NE. and SW.
- 78.69 Spur, slopes SW.
Descend 15 ft., over NW. slope, to
- 80.08 Intersect the Subdivision lines bet. secs. 19 and 30, surveyed due west. Closing cor. of said secs. established at this point, as hereinafter described.
Land, mountainous and rolling.
Soil, granite and malpais formation, 4th rate.
Timber, none.
Undergrowth, scrub palo verde, cacti, and catclaw.

N.0°6'E., on true line, on W. bdy. of sec. 19.
Over mountainous land, thru. scattering undergrowth.
Descend 55 ft., over N. slope.

Resurvey of Gila and Salt River Meridian, thru Township 8 North, 15

chains.


4.00 Head of draw, course W.
Ascend 256 ft., over SW. slope.

14.41 Slope changes to SE. Continue ascent.

26.54 Spur, slopes E. Desc. 55 ft., over N. slope to $\frac{1}{4}$ sec. cor. of sec. 24.


26.68 Fence brs. N. 5° W. and S. 5° E.

29.42 (39.74 chs. N. 0° 6' E. from cor. of secs. 24 and 25)
Intersect the reestablished $\frac{1}{4}$ sec. cor. of secs. 19 and 24, which is an iron post, 1 in. in diam., projecting 30 ins. above ground, and firmly set in ground and mound of stone, properly marked on brass cap, and witnessed by a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor. No bearing trees.
Alter this cor. monument to refer to the quarters of sec. 24 only, by changing markings on brass cap to read




No change in accessory is required.
Continue over N. slope, along fence line.
Descend 241 ft., to

39.82 (Midpoint of W. bdy. of sec. 19) Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone around post, for re-established $\frac{1}{4}$ sec. cor. of sec. 19 only, marked on brass cap,



No bearing trees available.
Continue over N. slope, along fence line.
Descend 313 ft. to

67.51 Intersect the witness cor. to reestablished cor. of secs. 13, 18, 19 and 24, which is 1.95 chs. S. 0° 6' W. of true point for cor. of said secs. This witness cor. is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by mound of stone, 2 ft. base, 1 1/2 ft. high W. of cor. No bearing trees. Alter this cor. monument to witness the point for cor. of secs. 13 and 24, only, by changing markings on brass cap, to read



1915-25

No change in accessory is required.
(40.04 chs. N. 0° 6' E. from $\frac{1}{4}$ sec. cor. of sec. 24) True point for cor. of secs. 13 and 24 falls in Humberg Creek, with water in holes, course S. 20° E.

Ascend 133 ft. over S. slope, to

79.63 Intersect the subdivision line bet. secs. 18 and 19, surveyed due west. Closing cor. of said secs. is established at this point, as hereinafter described.
Land, mountainous.
Soil, granite and malpais formation, 4th rate.
Timber, none.
Undergrowth, catclaw, cacti, and scrub palo verde.

N. 0° 6' E., on a true line on W. bdy. of sec. 18.
Over mountainous land, thru. scattering undergrowth.
Ascend slightly over SW. slope.

BOOK 3721

16 Resurvey of the Gila and Salt River Meridian thru Township 8 N.

Chains.

1.00 Spur, slopes NW. Desc. 39 ft., over N. slope.
 3.68 Draw, course W. Asc. 103 ft., over S. slope.
 23.85 Spur, slopes SW. Desc. 12 ft., over NW. slope.
 25.70 Draw, course SW. Asc. 36 ft., over S. slope, to
 29.87 (40.04 chs. N. 0° 6' E. from true point for cor. of secs. 13
 and 24) Intersect the reestablished $\frac{1}{4}$ sec. cor. of secs.
 13 and 18, which is an iron post, 1 in. in diam., pro-
 jecting 10 ins. above ground, firmly set, properly
 marked, and witnessed by a mound of stone, 2 ft. base, 1 1/2
 ft. high, W. of cor. No bearing trees.
 Alter this cor. monument to refer to the quarters of sec.
 13 only, by changing markings on brass cap to read

|
 1/4
 S13

1915-25

No bearing trees available.

No change in accessory is required.

Ascend 101 ft., over broken SW. slope.

36.08 Spur, slopes W. Desc. 37 ft., over NW. slope, to
 40.19 (Midpoint of W. bdy. of sec. 18) Set an iron post, 3 ft. long,
 1 in. in diam., 12 ins. in the ground to bed rock, deposit
 a stone marked with a cross (x) at base of post, and
 raise a mound of stone around post, for reestablished
 $\frac{1}{4}$ sec. cor. of sec. 18 only, marked on brass cap,

|
 1/4 S18

1925

No bearing trees available.

Descend slightly over NW. slope.

43.02 Draw, 5 lks. wide, course SW. Asc. 83 ft., over S. slope.

46.58 Spur, slopes SW. Desc. 48 ft., over NW. slope.

51.57 Draw, 5 lks. wide, course NW. Asc. 20 ft., over SW. slope.

55.57 Point of spur, slopes W. Desc. 154 ft., over NW. slope.

61.27 Draw, course W. Asc. 65 ft., over S. slope.

67.34 Spur, slopes SW. Desc. slightly over NW. slope.

68.38 Draw, 5 lks. wide, course SW.

Ascend gradually over SW. slope, to

70.06 (40.19 chs. N. 0° 6' E. from $\frac{1}{4}$ sec. cor. of sec. 13) Intersect
 the reestablished cor. of secs. 7, 12, 13 and 18, which is
 an iron post, 2 ins. in diam., projecting 12 ins. above
 ground, firmly set, properly marked and witnessed by
 mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor. No
 bearing trees. Alter this cor. monument to refer to
 secs. 12 and 13 only, by changing the markings on brass
 cap to read

T8N

R1W

S12

S13

1915-25

No bearing trees available. No change in accessory is
 required. Desc. 53 ft., over W. slope, to

80.38 Intersect the subdivision line bet. secs. 7 and 18, surveyed
 due west. Closing cor. of said secs. is established at
 this point as hereinafter described.

Land, mountainous.

Soil, granite and malpais formation, 3rd and 4th rate.


Timber, none.

Undergrowth, catclaw, cacti, and scrub palo verde.


Resurvey of the Gila and Salt River Meridian, thru. T. 8 N. 17

Chains.


From the closing cor. of secs. 7 and 18,
 N.0°6'E., on true line, on W. bdy. of sec. 7.
 Over mountainous land, thru. scattering undergrowth.
 Ascend 53 ft., over broken W. slope.
 10.59 Trail, brs. SW. and NE.
 11.70 Wash, 50 lks. wide, course SW.
 Ascend 110 ft., over SE. slope.
 17.25 Spur, slopes SW Desc. 25 ft., over NW. slope.
 20.75 Rock Wall Gulch, 70 lks. wide, course SW.
 22.20 Bend in Rock Wall Gulch, course SE. from NE.
 Ascend 195 ft., over SE. slope, to
 29.58 (39.90 chs. N.0°6'E. from cor. of secs. 12 and 13) Intersect
 the reestablished $\frac{1}{4}$ sec. cor. of secs. 7 and 12, which
 is an iron post, 1 in. in diam., projecting 10 ins.
 above ground, firmly set, properly marked on brass cap,
 and witnessed by mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high,
 W. of cor. No bearing trees.
 Alter this cor. monument to refer to the quarters of sec.
 12 only by changing markings on brass cap to read



No bearing trees available.
 No change in accessory is required.
 Ascend 185 ft., over SE. slope, to
 40.00 (Midpoint of W. bdy. of sec. 7) Set an iron post, 3 ft.
 long, 1 in. in diam., 12 ins. in the ground to bed-
 rock, deposit a stone marked with a cross (x) at base
 of post, and raise a mound of stone around post, for
 reestablished $\frac{1}{4}$ sec. cor. of sec. 7 only, marked on
 brass cap,



No bearing trees available. Asc. 224 ft. over broken E. slope.
 53.06 Intersect SE. side line (2-3) of "El Pero Bonito" patented
 lode mining claim, Min. Surv. No. 1520 at a point 11.47
 chs. S. 59 $\frac{1}{4}$ ° W. from cor. No. 2 thereof.
 Thence across said claim.
 56.30 Spur, slopes NE.
 Descend 160 ft., over NE. slope.
 59.18 Draw, 6 lks. wide, course NE.
 Ascend 77 ft., over SE. slope.
 63.65 Intersect NW. side line (1-4) of "El Pero Bonito" patented
 lode mining claim, Min. Surv. No. 1520 at a point 6.04 chs.
 S. 59 $\frac{1}{4}$ ° W. from cor. No. 1 thereof.
 Leave patented mineral land.
 67.47 Spur, slopes NE.
 Descend slightly over N. slope.
 69.78 (40.20 chs. No. 0°6' W. from $\frac{1}{4}$ sec. cor. of sec. 12),
 Intersect the reestablished cor. of secs. 1, 6, 7 and 12,
 which is an iron post, 2 ins. in diam., projecting 10
 ins. above ground, firmly set, properly marked on brass
 cap, and witnessed by a mound of stone 2 ft. base, 1 $\frac{1}{2}$
 ft. high, W. of cor. No bearing trees. Alter this cor.
 monument to refer to secs. 1 and 12 only by changing
 markings on brass cap to read



No bearing trees available.
 No change in accessory is required.

BOOK 3721

18 Resurvey of the Gila and Salt River Meridian, thru. T.8 N.

Chains.

79.98 Ascend 120 ft., over SE. slope.
 80.00 Point of spur, slopes NE. Desc. slightly over N. slope, to
 Intersect the subdivision line bet. secs. 6 and 7, surveyed
 due west. Closing cor. of said secs. is established
 at this point, as hereinafter described.
 Land, mountainous.
 Soil, granite formation, 4th rate.
 Timber, none.
 Undergrowth, catclaw, scrub palo verde and cacti.

 From the closing cor. of secs. 6 and 7,
 N. 0° 6' E., on true line, on W. bdy. of sec. 6.
 Over mountainous land, thru. scattering undergrowth.
 Descend 191 ft., over N. slope, to
 16.14 Rock Wall Gulch, course SE. Asc. 35 ft. over SE. slope.
 19.54 Descend 27 ft., over NE. slope, to
 23.78 Rock Wall Gulch, 70 lks. wide, course SW.
 Ascend 27 ft., over SE. slope, to
 28.26 Bend in Rock Wall Gulch, 70 lks. wide, course SE. from NE.
 Ascend over E. slope, to
 29.81 (40.03 chs. N. 0° 6' E. from cor. of secs. 1 and 12)
 Intersect the reestab. $\frac{1}{4}$ sec. cor. of secs. 1 and 6, which
 is an iron post, 1 in. in diam., projecting 10 ins.
 above ground, firmly set, properly marked on brass cap,
 and witnessed by mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
 W. of cor. No bearing trees.
 Alter this cor. monument to refer to quarters of sec. 1
 only, by changing markings on brass cap to read

S 1

1915-25

No bearing trees available. No change in accessory is
 required. Asc. 75 ft., over E. slope, to
 39.43 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the
 ground, for witness cor. to reestablished $\frac{1}{4}$ sec. cor.
 of sec. 6 only, marked on brass cap,

WC
1/4 S 6

1925

No bearing trees available.
 40.00 Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.
 True point for reestablishment of $\frac{1}{4}$ sec. cor. of sec. 6 only
 falls in wash 40 lks. wide, course SE. from N. in bottom
 of Rock Wall Gulch, where it is impracticable to monu-
 ment said cor.; therefore, establish witness cor. at
 0.57 chs. S. 0° 6' W., as described above.

Thence follow up wash.
 58.81 Leave wash, course S. from NW.

Ascend over W. slope, to
 65.84 (36.03 chs. N. 0° 6' E. from $\frac{1}{4}$ sec. cor. of sec. 1) Intersect the
 original cor. of Ts. 8 and 9 N., Rs. 1 E. and 1 W., at in-
 tersection of the 2nd Standard Parallel North, with the
 Gila and Salt River Meridian, which is a granite stone,
 16x12x5 ins. above ground, firmly set, marked with 6
 notches on each of E., W., N. and S. faces, and witnessed
 by mound of stone, S. of cor. No bearing trees.
 This cor. monument being a good durable stone, properly
 marked and witnessed, no reconstruction or alteration
 of same is required.


Land, mountainous.
 Soil, rocky and gravelly, 4th rate.
 Timber, none.
 Undergrowth, catclaw, cacti, and scrub palo verde.

Survey of the Subdivision of T8N,R1E.


Chains.

Preliminary to the survey of the subdivision of this township, begin at the cor. of secs. 25 and 36, hereinafter described, on the E. bdy. of the tp. and survey a Sectional Correction Line due west to intersection with W. bdy. of the township, setting temp. cors. thereon at intervals of 40.00 chs. The permanent sec. cors. are then established at the points where the meridional sec. lines surveyed from the sec. cors. on the S. bdy. in the normal manner, intersect said sectional correction line. The permanent $\frac{1}{4}$ sec. cors. on the sectional correction line are then established at mid-points bet. the sec. cors. with the exception of the $\frac{1}{4}$ sec. cor. of sec. 30 and 31, which is established at 40.00 chs. W. from the cor. of secs. 29, 30, 31, and 32. The quarter sec. cors. on the meridional sec. lines in the S. tier of secs. are established at 40.00 chs. S. from sectional correction line, placing the deficiency in measurement against the S. bdy. of the township

From the temporary cor. of secs. 25, 26, 35, and 36, on the sectional correction line.
 S. $0^{\circ}1'E.$, on random line, bet. secs. 35 and 36.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 81.30 Fall 10 lks. W. of the reconstructed cor. of secs. 1, 2, 35, and 36, on S. bdy. of Tps. hereinbefore described. Thence,
 N. $0^{\circ}1'W.$, on true line bet. secs. 35 and 36.
 Over mountainous land, through scattering undergrowth.
 Asc. general S. slope, 327 ft.
 20.15 Spur, slopes E.; desc. 544 ft. over NE. slope.
 40.60 Set an iron post, 3 ft. long, 1 in. diam., on bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for wit. cor. to $\frac{1}{4}$ sec. cor. of secs. 35 and 36, marked on brass cap



1925
 No bearing trees available.
 41.30 True point for $\frac{1}{4}$ sec. cor. of secs. 35 and 36, falls in center of wash, 10 lks. wide, course E.; where it is impracticable to set monument. Asc. 29 ft. over SE. slope.
 44.40 Spur, slopes E.; desc. 31 ft. over NE. slope.
 48.20 Draw, 10 lks. wide, course S. $80^{\circ}E.$; asc. 334 ft. over S. slope.
 65.70 Spur, slopes N. $60^{\circ}E.$, desc. 334 ft. over N. slope.
 81.30 Intersect the sectional correction line at 10 lks. E. of the temp. cor. of secs. 25, 26, 35, and 36, or 79.90 chs. west from the cor. of secs. 25 and 36 on the E. bdy. of the tp.
 At point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 25, 26, 35, and 36, marked on brass cap



1925
 Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 No bearing trees available.
 Land, mountainous.
 Soil, rocky and sandy loam, 4th rate.
 Timber, none.
 Undergrowth, cacti, palo verde, ocotilla, and catclaw.

Survey of the Subdivision of T8N, R1E.

Chains.

From the cor. of secs. 25 and 36 on the E. bdy. of the tp., which is an iron post, 2 ins. in diam., firmly set, properly marked on brass cap and witnessed by mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Thence West, on true line on sectional correction line, bet. secs. 25 and 36

Over mountainous land, through scattering undergrowth. Asc. 169 ft. over NE. slope.

19.60 Spur, slopes S.80°E.; asc. 75 ft. over spur.

29.50 Desc. 20 ft. over SW. slope.

37.00 Ravine, course SE.; asc. 179 ft. over E. slope.

39.95 Set an iron post, 3 ft. long, 1 in. diam., 4 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for 1/4 sec. cor., marked on brass cap

1/4 S25
S36
1925

No bearing trees available.

48.20 Ridge, brs N. and S.; desc. 387 ft. over SW. slope.

65.80 Old road, brs NW. and SE.

68.50 Boulder Creek, 3 lks. wide, 3 ins. deep, course SE.;

Asc. 196 ft. over NE. slope.

77.20 Spur, slopes N.20°E.; desc. slightly to cor.

79.90 The cor. of secs. 25, 26, 35, and 36.

Land, mountainous.

Soil, rocky and sandy loam, 4th rate.

Timber, none.

Undergrowth, greasewood, palo verde and cacti.

N.0°1'W., bet. secs. 25 and 26.

Over mountainous land, through scattering undergrowth.

Desc. 32 ft. over N. slope.

1.40 Ravine, 6 lks. wide, course NE.; desc. 32 ft. over NE. slope.

12.50 Wash, 30 lks. wide, course E.; Desc. along E. slope 39ft.

18.70 Boulder creek, with stream 3 lks. wide, 3 ins. deep, course S.20°E.; asc. 300 ft. over SW. slope. to 1/4 sec. cor.

21.10 Road, brs NW. and SE.

39.33 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for wit. cor. to 1/4 sec. cor., marked on brass cap

WC
1/4
S26 | S25
1925

No bearing trees available.

Raise mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor. True point for 1/4 sec. cor. of secs. 25 and 26, falls in unsuitable place for monumenting same.

40.00 Asc. 266 ft. over SW. slope.

52.00 Spur, slopes W.; asc. along rolling W. slope. 14 ft.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for cor. of secs. 23, 24, 25, and 26., marked on brass cap

T8N R1E
S23 | S24
S26 | S25
1925

Survey of the Subdivision of T8N,R1E.

BOOK 3721

Chains.

No bearing trees available.

Land, mountainous.
Soil, rocky and sandy, 4th rate.
Timber, none.
Undergrowth, cacti, ocotilla, palo verde, and mesquite.

40.00 East, on random line bet. secs. 24 and 25.
79.94 Set temp. 1/4 sec. cor.
Fall 7 lks. N. of the cor. of secs. 24 and 25 on the E. bdy. of the Tp., which is an iron post, 3 ft. long, 2 ins. in diam., firmly set, properly marked on brass cap and witnessed by mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

7.75 Thence
39.97 N.89°57'W., on true line bet. secs. 24 and 25.
Over mountainous land, through scattering undergrowth.
Asc. 53 ft. over E. slope
Spur, slopes SE.; desc. 66. ft. along SW. slope, to Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for 1/4 sec. cor., marked on brass cap

1/4 S24

S25
1925

No bearing trees available.
46.00 Desc. 151 ft. over W. slope.
50.85 Draw, 6 lks. wide, course SW.; asc. 40 ft. over SE. slope.
53.60 Spur, slopes S.; desc. 56 ft. over W. slope.
72.00 Thence over flat top mesa.
77.00 Flat top of ridge, brs N. and S.
79.94 Desc. 203 ft. over precipitous W. slope.
The cor. of secs. 23, 24, 25, and 26.

Land, mountainous.
Soil, rocky and sandy, 3rd and 4th rate.
Timber, none.
Undergrowth, cacti, ocotilla, and palo verde.

14.40 N.0°1'W., bet. secs. 23 and 24.
14.51 Over mountainous land, through scattering undergrowth.
30.50 Asc. along W. slope 22 ft.
35.20 Spur, slopes N.60°W.; desc. 39 ft. over NW. slope.
40.00 House brs N.41°W.;
Spur, slopes NW.; desc. 134 ft. over NE. slope.
Ravine, 6 lks. wide, course NW.; asc. 65 ft. to
40.14 True point for 1/4 sec. cor. of secs. 23 and 24 falls in an unsuitable place for monumenting same.
Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise mound of stone around post, for witness cor. to 1/4 sec. cor., marked on brass cap, witness to

1/4
S23 | S24
W/C
1925

No bearing trees available.

Survey of the Subdivision of T8N, R1E.

Chains.

Asc. 20 ft. over SW. slope.
 42.40 Spur, slopes NW.; desc. 120 ft. over NW. slope.
 65.20 Wash, 10 lks. wide, course W.; asc. 78 ft. over SW. slope.
 70.10 Spur, slopes W.; desc. 26 ft. over NW. slope,
 73.00 Wash, 10 lks. wide, course S.70°W.; asc. 142 ft. over S.
 slope.
 77.20 Road, brs E. and W.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in
 the ground to bed rock, deposit a stone marked with a
 cross at base of post, and raise a mound of stone around
 post, for cor. of secs. 13, 14, 23, and 24, marked on
 on brass cap

T8N R1E
 S14 | S13
 S23 | S24
 1925

No bearing trees available.

Land, mountainous.
 Soil, rocky and sandy, 4th. rate.
 Timber, none.
 Undergrowth, ocotilla, cacti, palo verde, and catclaw.

40.00 S.89°57'E., on random line bet. secs. 13 and 24.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.88 Fall 7 lks. N. of the cor. of secs. 13 and 24 on the E.
 bdy. of the Tp., which is an iron post, 2 ins. in diam.,
 firmly set, properly marked on brass cap and witnessed
 by mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Thence
 N.89°54'W., on true line bet. secs. 13 and 24.
 Over mountainous land, through scattering undergrowth.
 Desc. 346 ft. over NW. slope.
 30.00 Draw, 10 lks. wide, course N.60°E.; asc. 100 ft. over SE.
 slope to
 39.94 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in
 the ground to bed rock, deposit a stone marked with a
 cross (X) at base of post, and raise a mound of stone
 around post, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S13
 S24
 1925

No bearing trees available.
 Asc. 66 ft. over SE. slope to ridge.
 50.20 Road, brs NE. and SW.
 52.30 Ridge, brs N. and S.; desc. 104 ft. over W. slope.
 54.88 Same road, brs N. and SE.
 57.10 Head of draw, course SW.; asc. 18 ft. over SE. slope.
 60.60 Same road, brs NE. and SW.
 64.60 Spur, slopes SW.; desc. 210 ft. over NW. slope.
 72.60 Same road, brs N. and S.
 74.70 Wash, 10 lks. wide, course S.60°W.; asc. 42 ft. over SE.
 slope.
 77.70 Same road, brs NE. and SW.
 79.88 The cor. of secs. 13, 14, 23, and 24.

Land, mountainous.
 Soil, sandy and rocky, 4th rate.
 Timber, none.
 Undergrowth, ocotilla, mesquite, palo verde, and cacti.

Survey of the Subdivision of T8N, R1E.

Chains.

- N.0°1'W., bet. secs. 13 and 14.
Over mountainous land, through scattering undergrowth.
Asc. 389 ft. over S. slope.
- 12.30 Ridge, brs E. and W.; desc. 193 ft. over NE. slope.
- 30.10 Wash, 6 lks. wide, course E.; asc. 100 ft. over SE. slope
to
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the
ground to bed rock, deposit a stone marked with a cross
at base of post, and raise a mound of stone around post,
for $\frac{1}{4}$ sec. cor., marked on brass cap
- $\begin{array}{c} \uparrow \\ \text{S14} | \text{S13} \\ \hline 1925 \end{array}$
- No bearing trees available.
Asc. 583 ft. over SE. slope.
- 59.30 Rocky spur, slopes SE.; desc. 91 ft. over NW. slope.
- 62.70 Head of ravine, course W.; asc. 176 ft. over SW. slope.
- 68.30 Spur, slopes W.; desc. 384 ft. over NW. slope.
- 78.90 Ravine, 10 lks. wide, course W.; asc. 30 ft. over SW.
slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in
the ground, for cor. of secs. 11, 12, 13, and 14, marked
on brass cap
- $\begin{array}{c} \text{T8N, R1E} \\ \text{S11} | \text{S12} \\ \hline \text{S14} | \text{S13} \\ \hline 1925 \end{array}$
- Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
- Land, mountainous.
Soil, rocky, 4th rate.
Timber, none.
Undergrowth, cacti, ocotilla, palo verde, and mesquite.
-
- 40.00 S.89°54'E., on random line bet. secs. 12 and 13.
Set temp. $\frac{1}{4}$ sec. cor.
- 79.76 Intersect the cor. of secs. 12 and 13 on the E. bdy. of
the Tp., which is an iron post, 2 ins. in diam., firmly
set, properly marked on brass cap and witnessed by
mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
- Thence
N.89°54'W., on true line bet. secs. 12 and 13.
Over mountainous land, through scattering undergrowth.
Desc. 141 ft. over SW. slope.
- 7.35 Draw, 10 lks. wide, course S.; asc. 600 ft. over NE. slope.
- 39.88 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in
the ground to bed rock, deposit a stone marked with a
cross (X) at base of post, and raise a mound of stone
around post, for $\frac{1}{4}$ sec. cor., marked on brass cap
- $\frac{1}{4}$ S12


S13
1925
- No bearing trees available.
Continue asc. 200 ft. over NE. slope.
- 49.65 Rocky spur, slopes S.25°E.; desc. 111 ft. over SW. slope.
- 56.55 Ravine, 6 lks. wide, course S.; asc. 271 ft. over E. slope
- 72.00 Ridge, brs NE. and SW.; desc. 436 ft. over precipitous
W. slope.
- 79.76 The cor. of secs. 11, 12, 13, and 14

Survey of the Subdivision of T8N,R1E.

Chains.


Land, mountainous.
Soil, rocky, 4th rate.
Timber, none.
Undergrowth, cacti, ocotilla, mesquite, and catclaw.

N.0°1'W., bet. secs. 11 and 12.
Over mountainous land, through scattering undergrowth.
Asc. 154 ft. over SW. slope.
8.30 Spur, slopes W.; desc. 483 ft. over NW. slope.
25.60 Draw, 10 lks. wide, course W.; asc. 118 ft. over SW. slope.
36.90 Spur, slopes W.; desc. 46 ft. over NW. slope to
40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



1925

No bearing trees available
Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
Desc. 55 ft. over NW. slope.
55.10 Wash, 25 lks. wide, course SW.; asc. 200 ft. over SE. slope.
64.60 Spur, slopes SE.; then along E. slope.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise mound of stone around post, for cor. of secs. 1, 2, 11, and 12, marked on brass cap



1925

No bearing trees available.

Land, mountainous.
Soil, rocky, 4th rate.
Timber, none.
Undergrowth, cacti, ocotilla, buck brush, and mesquite.

40.00 S.89°54'E., on random line bet. secs. 1 and 12.
79.84 Set temp. $\frac{1}{4}$ sec. cor.
Fall 2 lks. N. of the cor. of secs. 1 and 12 on the E. bdy. of the Tp., which is an iron post, 2 ins. in diam., firmly set, properly marked on brass cap and witnessed by mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Thence

N.89°53'W., on true line bet. secs. 1 and 12.
Over mountainous land, through scattering undergrowth.
Desc. slightly over W. slope.
1.34 Draw, 10 lks. wide, course S.30°W.; asc. 11 ft. over SE. slope.
3.55 Point of spur, slopes S.; desc. 20 ft. over SW. slope.
5.35 Draw, 10 lks. wide, course S.30°E.; asc. 562 ft. over NE. slope.
24.30 Ridge, brs N. and SW.; desc. 292 ft. over NW. slope to
39.92 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in

Survey of the Subdivision of T8N,R1E.

Chains.

the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise mound of stone around post, for 1/4 sec. cor., marked on brass cap

1/4 S 1

S12
1925

No bearing trees available.

Desc. 115 ft. over NW. slope.

51.65 Wash, 6 lks. wide, course SW.; asc. 54 ft. over E. slope.

54.65 Spur, slopes SW.; desc. 190 ft. over W. slope.

75.05 Wash, 20 lks wide, course S. 20° W. Ascend 107 ft. over E. slope.

79.84 The cor. of secs. 1, 2, 11, and 12.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, none.

Undergrowth, ocotilla, catclaw, palo verde, and mesquite.

North, on random line bet. secs. 1 and 2.

40.00 Set temp. 1/4 sec. cor.

64.74 Fall 9 lks. E. of the standard cor. of secs. 35 and 36, T9N, R1E, on the 2nd Standard Parallel North, which is a stone, 14x12x6 ins., markes with 5 notches on W. face and 1 notch on E. face, and SC on N. face, and witnessed by a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

This cor. now refers to secs. 1, 2, 35, and 36. No change in marking or accessory is required.

Thence

S. 0° 5' E., on true line bet. secs. 1 and 2.

Over mountainous land, through scattering undergrowth.

Desc. 137 ft. over SW. slope.

12.94 Head of ravine, course W.; asc. 46 ft. over NW. slope.

17.04 Spur, slopes SW.; desc. 157 ft. over NW. slope.

24.74 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for 1/4 sec. cor., marked on brass cap

1/4

S 2 | S 1

1925

No bearing trees available.

Desc. 258 ft. over SE. slope.

36.94 Wash, 20 lks wide, course SE. Ascend 88 ft.; asc. 50 ft. over NE. slope.

44.74 Spur, slopes E.; desc. 107 ft. along E. slope.

64.74 The cor. of secs. 1, 2, 11, and 12.

Land, mountainous.

Soil, rocky and sandy, 3rd rate.

Timber, none.

Undergrowth, cacti, mountain willow, mesquite, catclaw, and palo verde.

From the temporary cor. of secs. 26, 27, 34, and 35. on the sectional correction line.

Survey of the Subdivision of T8^N, R1E.

Chains.

| | |
|-------|--|
| | S.0°1'E., on random line bet. secs. 34 and 35. |
| 40.00 | Set temp. $\frac{1}{4}$ sec. cor. |
| 80.88 | Intersect the reestablished cor. of secs. 34 and 35, on the S. bdy. of the Tp., hereinbefore described. |
| | Thence |
| | N.0°1'W., on true line bet. secs. 34 and 35. |
| | Over mountainous land, through scattering undergrowth. |
| | Asc. 214 ft. over SW. slope. |
| 1.00 | Wash, 10 lks. wide, course SW.; continue ascent. |
| 15.60 | Spur, slopes NW.; desc. 49 ft. over NE. slope. |
| 19.10 | Draw, course NW.; asc. 119 ft. over SW. slope. |
| 31.40 | Spur, slopes SW.; desc. 141 ft. over NW. slope. |
| 35.50 | Ravine, 6 lks. wide, course SW.; asc. 30 ft. over S. slope. |
| 38.00 | Spur, slopes W.; desc. 28 ft. over " slope. |
| 40.88 | True point for $\frac{1}{4}$ sec. cor. falls in draw, 10 lks. wide, course W., where it is impracticable to set monument. |
| 41.20 | Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for wit. cor. to $\frac{1}{4}$ sec. cor., marked on brass cap |
| | $\frac{1}{4}$ W C S34 S35 |
| | 1925 |
| | No bearing trees available. |
| | Asc. 214 ft. over S. slope. |
| 54.20 | Spur, slopes W.; thence along W. slope. |
| 61.00 | Draw, 6 lks. wide, course SW.; asc. 552 ft. over SW. slope |
| 80.00 | SW. rim of mesa, brs N.20°W. and S.20°E. |
| 80.88 | Intersect the sectional correction line at the temp. cor. of secs. 26, 27, 34, and 35., or 80.10 chs. West of the cor. of secs. 25, 26, 35, and 36. |
| | At point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise mound of stone around post, for cor. of secs. 26, 27, 34, and 35, marked on brass cap |
| | T8N R1E S27 S26 S34 S35 |
| | 1925 |
| | No bearing trees available. |
| | Land, mountainous. |
| | Soil, rocky, 4th rate. |
| | Timber, none. |
| | Undergrowth, cacti, catclaw, ocotilla, and palo verde. |
| | From the cor. of secs. 25, 26, 35, and 36. |
| | West, on true line on sectional correction line bet. secs 26 and 35. |
| | Over mountainous land, through scattering undergrowth. |
| | Desc. 9 ft. over NW. slope. |
| .80 | Ravine, 6 lks. wide, course NE.; asc. 194 ft. over NE. slope. |
| 26.00 | Wash, 20 lks. wide, course NE.; asc. 109 ft. over SE. slope. |
| 36.10 | Ravine, 6 lks. wide, course NE.; asc. 61 ft. over SE. slope. |
| 40.05 | True point for $\frac{1}{4}$ sec. cor. falls in ravine, 6 lks. wide, course S.75°E., where it is impracticable to set monument. |

Survey of the Subdivision of T8N, R1E.

Chains.

40;56 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for wit: cor. to $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S26 W
C

S35
1925

No bearing trees available.
Asc. 814 ft. over NE. slope.

64.00 East edge of mesa, brs NW. and SE.; thence across same.
80.10 The cor. of secs. 26, 27, 34, and 35.

Land, mountainous.
Soil, rocky, 4th rate.
Timber, none.
Undergrowth, palo verde, greasewood, cacti, and ocotilla.

N.0°1'W., bet. secs. 26 and 27.

Over mountainous land, through scattering undergrowth. Across top of mesa.

20.80 Leave top of mesa, brs NW. and SE.; desc. 304 ft. over NE. slope.

34.20 Head of draw, 6 lks. wide, course E.; asc. 50 ft. over S. slope.

37.50 Spur, slopes E.; desc. 82 ft. over NE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise mound of stone around post, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S27 | S26

1925

No bearing trees available.

Desc. 200 ft. over NE. slope.

55.40 Draw, 10 lks. wide, course E.; asc. 142 ft. over S. slope

59.50 Spur, slopes E.; desc. 334 ft. over NE. slope.

78.50 Wash, 10 lks. wide, course E.; asc. 50 ft. over S. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for cor. of secs. 22, 23, 26, and 27, marked on brass cap

T8N R1E
S22 | S23

S27 | S26

1925

No bearing trees available.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, none.

Undergrowth, ocotilla, catclaw, and palo verde.

Survey of the Subdivision of T8N, R1E.

| | |
|---------|---|
| Chains. | East, on random line bet. secs. 23 and 26. |
| 40.00 | Set temp. $\frac{1}{4}$ sec. cor. |
| 79.80 | Fall 23 lks. S. of the cor. of secs. 23, 24, 25, and 26. |
| | Thence |
| | S. $89^{\circ}50'W.$, on true line bet. secs. 23 and 26. |
| | Over mountainous land, through scattering undergrowth. |
| | Desc. 512 ft. over W. slope. |
| 13.30 | Boulder creek, dry, 30 lks. wide, course S.; asc. 400 ft. over SE. slope. |
| 16.60 | Road, brs N. and S. |
| 39.90 | Set an iron post, 3 ft. long, 1 in. diam., on bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor., marked on brass cap |
| | $\frac{1}{4}$ S23 S26 1925 |
| | No bearing trees available. |
| | Asc. 200 ft. over S. slope. |
| 60.70 | Spur, slopes S.; desc. 97 ft. over SW. slope. |
| 72.50 | Wash, 10 lks. wide, course SE.; asc. 63 ft. over S. slope. |
| 79.80 | The cor. of secs. 22, 23, 26, and 27. |
| | Land, mountainous. |
| | Soil, rocky, 4th rate. |
| | Timber, none. |
| | Undergrowth, cacti, mesquite, catclaw, and palo verde. |
| | N. $0^{\circ}1'W.$, bet. secs. 22 and 23. |
| | Over mountainous land, through scattering undergrowth. |
| | Asc. 19 ft. over S. slope. |
| 1.10 | Spur, slopes E.; desc. 15 ft. over N. slope. |
| 3.50 | Wash, 10 lks. wide, course S. $60^{\circ}E.$; asc. 218 ft. over S. slope. |
| 15.00 | Ridge, brs E. and W.; desc. 339 ft. over NW. slope. |
| 40.00 | Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor., marked on brass cap |
| | $\frac{1}{4}$ S22 S23 1925 |
| | No bearing trees available. |
| | Desc. 125 ft. over NW. slope. |
| 47.40 | Creek, with stream, 3 lks. wide, course E.; asc. 222 ft. over SE. slope. |
| 64.40 | Ridge, brs E. and W.; desc. 91 ft. over NE. slope. |
| 70.30 | Draw, 6 lks. wide, course S. $60^{\circ}E.$; asc. 367 ft. over S. slope. |
| 80.00 | Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 14, 15, 22, and 23, marked on brass cap |
| | T8N R1E S15 S14 S22 S23 1925 |
| | No bearing trees available |
| | Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. |
| | Land, mountainous. |
| | Soil, rocky, 4th rate. |
| | Undergrowth, cacti, mesquite, catclaw, and palo verde. |

Survey of the Subdivision of T8N,R1E.

| | |
|---------|--|
| Chains. | N.89°50'E., on random line bet. secs. 14 and 23. |
| 40.00 | Set temp. 1/4 sec. cor. |
| 79.80 | Fall 2 lks. S. of the cor. of secs. 13,14,23, and 24. |
| | Thence |
| | S.89°49'W., on true line bet. secs. 14 and 23. |
| | Over mountainous land, through scattering undergrowth. |
| | Asc. 54 ft. over SE. slope. |
| 3.60 | Spur, slopes SW.; then along S. slope. |
| 19.40 | Ravine, course SW.; asc. 106 ft. over SE. slope. |
| 24.20 | Spur, slopes SW.; desc. 390 ft. over W. slope. |
| 37.50 | Boulder Creek, with stream 2 lks. wide, 2 ins. deep, course S.; asc. slightly over SE. slope. |
| 38.90 | Road, brs N. and S. |
| 39.90 | Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for 1/4 sec. cor., marked on brass cap |
| | 1/4 S14 |
| | S23 1925 |
| | No bearing trees available. |
| | Asc. 650 ft. over SE. slope. |
| 77.80 | Spur, slopes SE.; desc. along SW. slope, 22 ft. |
| 79.80 | The cor. of secs. 14,15,22, and 23. |
| | Land, mountainous. |
| | Soil, rocky, 4th rate. |
| | Timber, none. |
| | Undergrowth, mesquite, palo verde, buckbrush, ocotilla, catclaw, and cacti. |
| ----- | |
| | N.0°1'W., bet. secs. 14 and 15. |
| | Over mountainous land, through scattering undergrowth. |
| | Asc. 66 ft. over SW. slope. |
| 4.00 | Spur, slopes SE.; desc. along E. slope 80 ft. |
| 18.40 | Spur, slopes E.; desc. 128 ft. over N. slope. |
| 26.00 | Draw, 10 lks. wide, course E.; asc. 97 ft. over S. slope. |
| 31.00 | Spur, slopes E.; desc. 164 ft. over NE. slope to |
| 40.00 | Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for 1/4 sec. cor., marked on brass cap |
| | 1/4 |
| | S15 S14 |
| | 1925 |
| | No bearing trees available. |
| | Desc. 326 ft. over NE. slope. |
| 65.50 | Cottonwood Creek (dry) 30 lks. wide, course SE.; asc. 440 ft. over S. slope. |
| 65.80 | Road, brs NW. and SE. |
| 80.00 | Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for cor. of secs. 10,11,14, and 15, marked on brass cap |
| | T8N R1E S10 S11 |
| | S15 S14 |
| | 1925 |
| | No bearing trees available. |

Survey of the Subdivision of T8N,R1E.

Chains

Land, mountainous.
Soil, rocky and gravelly, 3rd and 4th rate.
Timber, none.
Undergrowth, cacti, ocotilla, buck brush, and mountain mahogany.

40.00 N.89°49'E., on random line bet. secs. 11 and 14.
79.78 Set temp. $\frac{1}{4}$ sec. cor.
Intersect the cor. of secs. 11,12,13, and 14.

Thence
26.38 S.89°49'W., on true line bet. secs. 11 and 14.
Over mountainous land, through heavy undergrowth.
Desc. 724 ft. over rocky W. slope.
39.89 Boulder Creek, with stream 3 lks. wide, 3 ins. deep,
course S.20°W.; asc. 391 ft. over SE. slope.
Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in
the ground to bed rock, deposit a stone marked with a
cross (X) at base of post, and raise a mound of stone
around post, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S11

S14
1925

No bearing trees available.
54.48 Asc. 300 ft. over SE. slope.
68.50 Spur, slopes S.; desc. 371 ft. over SW. slope.
Draw, 6 lks. wide, course S.20°W.; asc. 199 ft. over
SE. slope.
74.78 Spur, slopes S.; desc. 110 ft. along SW. slope.
79.78 The cor. of secs. 10,11,14, and 15.

Land, mountainous.
Soil, rocky and gravelly, 3rd rate.
Timber, none.
Undergrowth, ocotilla, cacti, mesquite, and palo verde.

8.80 N.0°1'W., bet. secs. 10 and 11.
21.70 Over mountainous land, through scattering undergrowth.
35.40 Asc. 126 ft. over SW. slope.
35.41 Spur, slopes SW.; desc. 90 ft. over NW. slope.
Draw, 6 lks. wide, course SW.; asc. 528 ft. over SW. slope
Ridge, brs SE. and NW.; desc. slightly over N. slope.
From this point on line, U.S.L.M. No. 2931, brs. N.70°43'
W., 30.12 chs. dist. U.S.L.M. No. 2931 is a granite
stone in place, 4x3x2 ft. above ground, marked U.S.L.M.
2931 and witnessed by a mound of stone, 6 ft. base, 6
ft. high alongside.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in
the ground to bed rock, deposit a stone marked with a
cross (X) at base of post, and raise a mound of stone
around post, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$

S10 | S11


1925

No bearing trees available.
61.80 Desc. 450 ft. over N. slope.
Draw, 6 lks. wide, course E.; asc. 188 ft. over SE. slope

Survey of the Subdivision of T8N, R1E.


Chains.

71.20 Spur, slopes E.; desc. 154 ft. over NE. slope.
 79.10 Draw, 6 lks. wide, course E.; asc. 26 ft. over S. slope.
 79.79 Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise mound of stone around post, for wit. cor. to cor. of secs. 2, 3, 10, and 11, marked on brass cap



80.00 No bearing trees available.
 True point for cor. of secs. 2, 3, 10, and 11 falls in wash, course SE., where it is impracticable to monument the cor.
 Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, buckbrush, cacti, mountain mahogany, mountain willow, catclaw, and mesquite.

40.00 From the true point for cor. of secs. 2, 3, 10, and 11. N. 89° 49' E., on random line bet. secs. 2 and 11.
 Set temp. 1/4 sec. cor.
 79.80 Fall 2 lks. N. of the cor. of secs. 1, 2, 11, and 12 Thence S. 89° 50' W., on true line bet. secs. 2 and 11. Over mountainous land, through scattering undergrowth. Asc. 10 ft. over E. slope.
 5.80 Spur, slopes S.; desc. 62 ft. over W. slope.
 15.30 Wash, 4 lks. wide, course S.; asc. 51 ft. over SE. slope.
 24.40 Spur, slopes S.; desc. 56 ft. over W. slope.
 31.10 Wash, 6 lks. wide, course S.; asc. 70 ft. over E. slope.
 39.90 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for 1/4 sec. cor., marked on brass cap



No bearing trees available.
 Asc. 12 ft. over E. slope.
 41.60 Spur, slopes S. 25° E.; desc. 437 ft. over SW. slope.
 65.60 Boulder Creek, with stream of water, 3 lks. wide, course S. Asc. 186 ft. over E. slope.
 72.60 Spur, slopes SE.; desc. 73 ft. over S. slope.
 79.80 The cor. of secs. 2, 3, 10, and 11.
 Land, mountainous.
 Soil, rocky and sandy, 4th rate.
 Timber, none.
 Undergrowth, cacti, mountain willow, mesquite, catclaw, and palo verde.

40.00 North, on random line bet. secs. 2 and 3.
 Set temp. 1/4 sec. cor.
 65.00 Intersect the 2nd Standard Parallel North, 9 lks. W. of the standard cor. of secs. 34 and 35, which is

Survey of the Subdivision of T8N,R1E.

Chains


a granite rock, 3x2x2 ft. above ground, in place, marked x on top, SC on N. face and 4 notches on W. and 2 notches on E. face, and witnessed by mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

This cor. now refers to secs. 2,3,34, and 35.
No change in marking or accessory is required.

Thence

S.0°4'W., on true line bet. secs. 2 and 3.
Over mountainous land, through medium undergrowth.
Asc. N. slope slightly

- 1.30 Spur, slopes W.; desc. 485 ft. over SW. slope.
- 20.20 Head of draw, course W.; asc. 30 ft. over NW. slope.
- 21.40 Spur, slopes W.; desc. 80 ft. over SW. slope.
- 25.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., marked on brass cap



- No bearing trees available.
- Raise mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.
- Asc. 213 ft. over SW. slope.
- 34.50 Spur, slopes SW.; desc. 181 ft. over SE. slope.
- 41.20 Boulder Creek, with stream of water 3 lks. wide, 3 ins. deep, course E. Asc. 309 ft. over N. slope.
- 48.20 Spur, slopes E.; desc. 319 ft. over S. slope.
- 65.00 The cor. of secs. 2,3,10, and 11.

Land, mountainous.
Soil, rocky and sandy, 4th rate.
Timber, none.
Undergrowth, catclaw, mesquite, buckbrush, and palo verde.


From the temporary cor. of secs. 27,28,33, and 34.
S.0°2'E., on random line bet. secs. 33 and 34.

- 40.00 Set temp. 1/4 sec. cor.
- 81.70 Intersect the cor. of secs. 33 and 34 on the S. bdy. of the Tp., hereinbefore described.

Thence

N.0°2'W., on true line bet. secs. 33 and 34.
Over mountainous land, through medium undergrowth.
Over gently rolling land, thru. medium undergrowth.

- 27.43 Draw, 10 lks. wide, course SW.; asc. slightly over W. slope
- 41.70 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for 1/4 sec. cor., marked on brass cap



- No bearing trees available.
- Asc. 68 ft. over SW. slope.
- 47.97 Spur, slopes SW.; desc. 48 ft. over W. slope.
- 57.11 Draw, course S.20°W., from N.10°W. Enter mountainous land. Ascend 137 ft., over S. slope.
- 75.70 Spur, slopes S.20°W.; thence over W. slope.
- 81.70 Intersect the sectional correction line at the temp. cor. of secs. 27,28,33, and 34, or 80.00 chs. west from the cor. of secs. 26,27,34, and 35.
At point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 6 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post,

Survey of the Subdivisions of T8N,R1E.

Chains.

and raise a mound of stone around post, for cor. of secs. 27,28,33, and 34, marked on brass cap

| | |
|---------|-----|
| T8N,R1E | |
| S28 | S27 |
| S33 | S34 |

1925

No bearing trees available.

Land, rolling hills.
Soil, rocky, 3rd rate.
Timber, none.
Undergrowth, palo verde, catclaw, ocotilla, cacti, and mesquite.

From the cor. of secs. 26,27,34, and 35.
West, on sectional correction line bet. secs. 27 and 34.
Over mountainous land, through scattering undergrowth.
West edge of mesa, brs NW. and SE.; desc. 768 ft. over precipitous W. slope.
Spur, slopes SW.; continue descent.
Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

1.75
38.50
40.00

$\frac{1}{4}$ S27

S34
1925

No bearing trees available.
Raise mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
Desc. 342 ft. over W. slope.
Spur, slopes SW.; continue descent.
The cor. of secs. 27,28,33, and 34.

75.00
80.00

Land, mountainous.
Soil, rocky, 4th rate.
Timber, none.
Undergrowth, palo verde, cacti, mesquite, and catclaw.

N.0°2'W., bet. secs. 27 and 28.
Over mountainous land, through scattering undergrowth.
Asc. 93 ft. over SW. slope.
Spur, slopes SW.; desc. 40 ft. over N. slope.
Draw, 10 lks. wide, course SW.; then along W. slope.
Asc. 68 ft. over SE. slope.
Point of spur, slopes W.; desc. 40 ft. over NW. slope.
Draw, 10 lks. wide, course SW.
Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

15.50
18.80
22.50
27.88
39.75
40.00

$\frac{1}{4}$
S28 | S27

1925

No bearing trees available.
Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.
Asc. 788 ft. over broken SW. slope to sec. cor.
Small spur, slopes SW.
Spur, slopes SW.
Draw, 10 lks. wide, course SW.

45.80
64.51
66.50

X
Survey of the Subdivision of T8N, R1E.

Chains.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise mound of stone around post, for cor. of secs. 21, 22, 27, and 28, marked on brass cap

| | |
|---------|-----|
| T8N R1E | |
| S21 | S22 |
| ----- | |
| S28 | S27 |

1925

No bearing trees available.

Land, mountainous.

Soil, rocky and sandy, 3rd and 4th rate.

Timber, none.

Undergrowth, palo verde, ocotilla, cacti.

East, on random line bet. secs. 22 and 27.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.10 Fall 2 lks. S. of the cor. of secs. 22, 23, 26, and 27.

Thence

S. 89° 59' W., on true line bet. secs. 22 and 27.

Over mountainous land, through medium undergrowth.

Asc. 768 ft. over E. slope.

17.66 Draw, course SE.; continue asc.

33.54 Ridge, brs N. and S.; desc. 160 ft. over SW. slope.

40.05 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor., marked on brass cap

| |
|-------------------|
| $\frac{1}{4}$ S22 |
| ----- |

S27

1925.

No bearing trees available.

Desc. 380 ft. over W. slope.

50.60 Trail, brs N. and S.

53.20 Draw, course S.; asc. 290 ft. over E. slope.

67.20 Spur, slopes S.; desc. 114 ft. over W. slope.

73.34 Head of draw, course SW.; asc. 8 ft. over SE. slope.

80.10 The cor. of secs. 21, 22, 27, and 28.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, none.

Undergrowth, palo verde, cacti, and mesquite.

N. 0° 2' W., bet. secs. 21 and 22.

Over rough mountains, through scattered undergrowth.

Asc. 137 ft. over S. slope.

4.40 Spur, slopes W.; desc. 115 ft. over NW. slope.

12.70 Draw, 10 lks. wide, course W.; asc. 134 ft. over SW. slope.

16.60 Spur, slopes W.; desc. 74 ft. over NW. slope.

20.40 Ravine, course SW.; asc. 301 ft. over SE. slope

35.20 Ridge, brs NW. and SE.; desc. 150 ft. over N. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

Survey of the Subdivision of T8N, R1E.

Chains.

$\frac{1}{4}$

S21 S22

1925

No bearing trees available.
 Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 56.70 Draw, 10 lks. wide, course E.; asc. 463 ft. over S. slope
 71.60 Spur, slopes SE.; desc. 74 ft. over NE. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins.
 in the ground to bed rock, deposit a stone marked with
 a cross (X) at base of post, and raise a mound of stone,
 around post, for cor. of secs. 15, 16, 21, and 22, marked
 on brass cap

T8N R1E

S16 | S15

S21 | S22

1925

No bearing trees available.

Land, mountainous.

Soil, rocky and sandy, 3rd and 4th rate.

Timber, none.

Undergrowth, palo verde, cacti, greasewood, and mesquite.

40.00 N. $89^{\circ}59'E.$, on random line, bet. secs. 15 and 22.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.84 Fall 21 lks. N. of the cor. of secs. 14, 15, 22, and 23.
 Thence
 N. $89^{\circ}52'W.$, on true line bet. secs. 15 and 22.
 Over mountainous land, through scattering undergrowth.
 Desc. 204 ft. over SW. slope.
 9.60 Draw, 10 lks. wide, course SE.; asc. 398 ft. over NE.
 slope.
 30.70 Spur, slopes SE.; asc. along S. slope, 62 ft
 36.00 Spur, slopes S. $20^{\circ}W.$; desc. 168 ft. over SW. slope.
 39.92 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in
 the ground to bed rock, deposit a stone marked with a
 cross (X) at base of post, and raise a mound of stone
 around post, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S15

S22

1925

No bearing trees available.
 57.00 Head of draw, course SE.; asc. 455 ft. over E. slope.
 69.00 Spur, slopes SE.; desc. 44 ft. over SW. slope.
 76.90 Head of draw, course SE.; asc. 35 ft. over SE. slope.
 79.84 The cor. of secs. 15, 16, 21, and 22.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, none.

Undergrowth, cacti, mesquite, palo verde, and greasewood

Survey of the Subdivision of T8N, R1E.

Chains.

N.0°2'W., bet. secs. 15 and 16.
 Over mountainous land, through scattering undergrowth.
 Asc. 53 ft. over SE. slope.
 3.00 Ridge, brs E. and W.; desc. 154 ft. over N. slope.
 8.50 Draw, 6 lks. wide, course NE.; asc. 64 ft. over S. slope.
 13.40 Spur, slopes E.; desc. 456 ft. over NW. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 s16 | s15

1925

No bearing trees available.
 Raise mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
 41.70 Wash, 10 lks. wide, course E.; asc. 75 ft. over SE. slope.
 46.50 Spur, slopes E.; desc. 85 ft. over NE. slope.
 50.70 Draw, 10 lks. wide, course SE.; asc. 326 ft. over S.
 slope.
 61.00 Ridge, brs E. and W.; desc. 529 ft. over NW. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in
 the ground to bed rock, deposit a stone marked with a
 cross (X) at base of post, and raise a mound of stone
 around post, for cor. of secs. 9, 10, 15, and 16., marked
 on brass cap

T8N R1E
 S 9 | S10
 s16 | s15

1925

No bearing trees available.

Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, catclaw, buckbrush, mountain mahogany, and
 mountain willow.

40.00 S.89°52'E. on random line bet. secs. 10 and 15.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.98 Fall 7 lks. N. of the cor. of secs. 10, 11, 14, and 15.

Thence

N.89°49'W., on true line bet. secs. 10 and 15.
 Over mountainous land, through scattering undergrowth.
 Desc. 223 ft. over SW. slope.
 6.30 Ravine, course SW.; asc. 50 ft. over SE. slope.
 10.90 Spur, slopes SW.; desc. 175 ft. over SW. slope.
 18.80 Cottonwood creek, dry, 30 lks. wide, course S.
 Old road in bottom of Cottonwood creek, brs N. and S.
 24.10 Wash, 15 lks. wide, course S.30°E.
 30.30 Same wash, 15 lks. wide, course NE.
 34.70 Wash, 15 lks. wide, course SE. (Same)
 Asc. 100 ft. over SE. slope to
 39.99 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in
 the ground to bed rock, deposit a stone marked with a
 cross (X) at base of post, and raise a mound of stone
 around post, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S10
 S15
 1925

No bearing trees available.

Survey of the Subdivision of T8N,R1E.


Chains

- Asc. 107 ft. over SE. slope.
- 46.00 Slope changes to NE.; asc. 98 ft.
- 74.70 Spur, slopes NE.; desc. 25 ft. over NW. slope.
- 79.98 The cor. of secs. 9,10,15, and 16.

Land, mountainous.
 Soil, rocky and sandy, 3rd and 4th rate.
 Timber, none.
 Undergrowth, ocotilla, buckbrush, catclaw, cacti.


N.0°2'W., bet. secs. 9 and 10.
 Over mountainous land, through medium undergrowth.
 Desc. 41 ft. over N. slope.

- 1.90 Draw, 6 lks. wide, course E.; asc. 71 ft. over SE. slope.
- 8.40 Spur, slopes E.; desc. 102 ft. over N. slope.
- 13.10 Draw, course E.; asc. 167 ft. over S. slope.
- 23.00 Spur, slopes E.; desc. along N.E. slope 80 ft.
- 31.40 Ravine, 6 lks. wide, course SE.; asc. asc. 72 ft. over S. slope.
- 33.00 Spur, slopes E.; desc. 164 ft. over NE. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor., marked on brass cap



No bearing trees available.
 Desc. slightly over N. slope.

- 42.10 Cottonwood creek, dry, 30 lks. wide, course SE.; asc. 613 ft. over S. slope.
- 44.10 Road, brs NW. and SE.
- 68.70 Spur, slopes S.10°W.; asc. 122 ft. along SW. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 3,4,9, and 10, marked on brass cap



No bearing trees available.
 Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, mountainous.
 Soil, rocky and sandy, 3rd and 4th rate.
 Timber, none.
 Undergrowth, buck brush, cacti, ocotilla, and mesquite.

- 40.00 S.89°49'E., on random line bet. secs. 3 and 10.
- 80.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.00 Fall 2 lks. S. of the true point for cor. of secs. 2,3, 10, and 11.

Thence
 N.89°50'W., on true line bet. secs. 3 and 10.
 Over mountainous land, through medium undergrowth.

- Asc. 396 ft. along SE. slope.
- 21.00 Spur, slopes SE.; asc. 77 ft. along S. slope.
- 30.80 Head of draw, course SE.; asc. 229 ft, over SE. slope.

Survey of the Subdivision of T8N, R1E.

Chains.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\frac{1}{4} \text{ S } 3$$

S10
1925

No bearing trees available.

43.50 Ridge, brs N. and S.; desc. 310 ft. over W. slope.
60.10 Draw, 10 lks. wide, course S.25°W.; asc. 278 ft. over SE. slope.

78.46 Spur, slopes S.; desc. 23 ft. over SW. slope.

80.00 The cor. of secs. 3, 4, 9, and 10.

Land, mountainous.

Soil, rocky and gravelly, 4th rate.

Timber, none.

Undergrowth, cacti, catclaw, palo verde, and mesquite.

North, on random line bet. secs. 3 and 4.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

64.88 Intersect the 2nd Standard Parallel North, 18 lks. E. of the standard cor. of secs. 33 and 34, which is an iron post, 2 ins. in diam., firmly set, and properly marked on brass cap, and witnessed by mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor. No bearing trees. Alter this cor. monument to refer to secs. 3, 4, 33, and 34, by changing marking on brass cap, to read

T9N R1E

S C

S33 | S34

S 4 | S 3

T8N

1918-25

Thence

S.0°9'E., on true line bet. secs. 3 and 4.

Over mountainous land, through medium undergrowth.

Asc. 189 ft. over N. slope.

6.78 Spur, slopes E.; desc. 75 ft. over S. slope.

15.08 Ravine, 6 lks. wide, course E.; asc. 200 ft. over NE. slope.

24.88 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\frac{1}{4}$$

$$\text{S } 4 \text{ | S } 3$$

1925

No bearing trees available.

27.88 Spur, slopes SE.; desc. 568 ft. over SE. slope.

55.68 Spur, slopes S.20°E.; desc. 240 ft. along SW. slope.

64.88 The cor. of secs. 3, 4, 9, and 10.

Land, mountainous.

Soil, rocky and sandy, 4th rate.

Timber, none.

Undergrowth, catclaw, oak brush, ocotilla, buck brush.

Survey of the Subdivision of T8N,R1E.


Chains.

From the temporary cor. of secs. 28,29,32, and 33 on the sectional correction line.

40.00 S.0°2'E., on random line bet. secs. 32 and 33.
 Set temp. 1/4 sec. cor.
 81.65 Fall 4 lks. W. of the cor. of secs. 32 and 33, on S. l. of Tp. hereinbefore described.

Thence
 N.0°2'W., on true line bet. secs. 32 and 33.
 Over mountainous land, through scattering undergrowth.
 Desc. 25 ft. over E. slope.

8.96 Draw, course SE.; asc 109 ft. over E. slope.
 41.65 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for 1/4 sec. cor., marked on brass cap




1925

No bearing trees available.

55.93 Desc. 70 ft. along E. slope.
 Draw, course SE.; asc. 114 ft. over SW. slope.

81.65 Intersect the sectional correction line 4 lks. E. of the temp. cor. of secs. 28,29,32, and 33, or 79.96 chs. west of the cor. of secs. 27,28,33, and 34.
 At point of intersection, set an iron post, 3 ft. long, 2 ins. in diam, 12 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for cor. of secs. 28,29,32, and 33, marked on brass cap.




1925

No bearing trees available.
 Land, mountainous.
 Soil, sandy, 2nd rate.
 Timber, none.
 Undergrowth, catclaw, ocotilla, and cacti.

From the cor. of secs. 27,28,33, and 34.
 West, on true line on sectional correction line bet. secs. 28 and 33.

4.15 Desc. 52 ft. over W. slope.
 8.00 Wash, 25 lks. wide, course S.; asc. 25 ft. over E. slope.
 16.00 Spur, slopes S.; desc. slightly over W. slope.
 20.83 Wash, 25 lks. wide, course S.; asc. 23 ft. over E. slope.
 34.55 Spur, slopes S.; desc. 12 ft. over W. slope.
 39.34 Wash, 20 lks. wide, course S.; asc. slightly over E. slope.
 39.98 Spur, slopes S.; desc. slightly over W. slope.
 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., marked on brass cap



Survey of the Subdivision of T8N, R1E.

Chains.


No bearing trees available.
 Raise mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
 Desc. slightly over W. slope.
 45.23 Tule creek, dry, course S.; asc. slightly over E. slope.
 51.83 Spur, slopes S.; desc. 25 ft. over W. slope.
 57.53 Wash, 50 lks. wide, course S.20°E.; asc. 156 ft. over SE. slope.
 64.83 Spur, slopes SE.; desc. 20 ft. over W. slope.
 77.93 Draw, course S.; asc. slightly over E. slope.
 79.96 The cor. of secs. 28, 29, 32, and 33.

Land, rolling mountains.
 Soil, rocky and sandy, 3rd rate.
 Timber, none.
 Undergrowth, palo verde, catclaw, cacti, and ocotilla.

N.0°2'W., bet. secs. 28 and 29.

Over mountainous land, through scattering undergrowth.
 Asc. slightly along E. slope.



5.97 Head of draw, course SE.; asc. 111 ft. over SW. slope.
 11.13 Spur, slopes SE.; then along NE. slope.
 19.63 Desc. 165 ft. over NE. slope.
 25.54 Draw, 10 lks. wide, course E.; asc. 69 ft. over E. slope.
 35.83 Desc. 69 ft. over NE. slope.
 39.53 Tule creek, with stream of water 3 lks. wide, 2 ins. deep, course SE.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor., marked on brass cap



1925

No bearing trees available.
 Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.
 Asc. 543 ft. over SW. slope.

49.88 Spur, slopes W.; continue ascent.
 66.46 Spur, slopes W.; desc. 139 ft over NW. slope.
 71.49 Draw, course W.; asc. 91 ft. over SW. slope.
 78.40 Spur, slopes W.; desc. 12 ft. over NW. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 20, 21, 28, and 29, marked on brass cap



No bearing trees available.
 Raise mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, cacti, ocotilla, catclaw, and palo verde.

East, on random line bet. secs. 21 and 28.

40.00 Set temp. ¼ sec. cor.
 80.36 Intersect the cor. of secs. 21, 22, 27, and 28.

Thence
 West, on true line bet. secs. 21 and 28.

Survey of the Subdivision of T8N, R1E.

Chains.

Over mountainous land, through medium undergrowth.
 Along S. slope.
 6.30 Spur, slopes S.; desc. 352 ft. over W. slope.
 23.86 Draw, course SE.; asc. 174 ft. over E. slope.
 33.36 Thence across level mesa land.
 40.18 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S21

S28
 1925

No bearing trees available.
 Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Desc. 247 ft. over W. slope.
 55.50 Draw, course S.; asc. 164 ft. over E. slope.
 74.54 Ridge, brs N. and S.; desc. 119 ft. over W. slope.
 80.36 The cor. of secs. 20, 21, 28, and 29.

Land, rolling mountains.
 Soil, 2nd rate.
 Timber, none.
 Undergrowth, catclaw, ocotilla, and cacti.

N.0°2'W., bet. secs. 20 and 21.
 Over mountainous land, through scattering undergrowth.
 Asc. 35 ft. along SW. slope.

3.76 Spur, slopes W.; desc. 23 ft. over NW. slope.
 7.76 Draw, course W.; asc. 50 ft. over SW. slope.
 11.32 Spur, slopes W.; desc. 114 ft. over NW. slope.
 16.30 Draw, course W.; asc. 95 ft. over SW. slope.
 20.83 Spur, slopes W.; desc. 20 ft over N. slope.
 23.88 Draw, course SW.; asc. 241 ft over S. slope to
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$

S20 | S21

1925

No bearing trees available.
 Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Asc. 63 ft. over S. slope.

43.58 Spur, slopes W.; desc. 173 ft. over NW. slope.
 55.08 Draw, course SW.; asc. 304 ft. over SW. slope.
 67.30 Spur, slopes W.; desc. 73 ft. over NW. slope.
 74.14 Draw, 2 lks. wide, course W.; asc. 37 ft. over SW. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in
 the ground to bed rock, deposit a stone marked with a
 cross (X) at base of post, and raise a mound of stone
 around post, for cor. of secs. 16, 17, 20, and 21, marked
 on brass cap

T8N | R1E
 S17 | S16

S20 | S21

1925

No bearing trees available.

Land, mountainous.
 Soil, rocky, 4th rate.
 Undergrowth, cacti, palo verde, ocotilla and catclaw.
 Timber, none.

Survey of the Subdivision of T8N,R1E.

Chains.

40.00 East, on random line bet. secs. 16 and 21.
Set temp. 1/4 sec. cor.
80.08 Fall 28 lks. S. of the cor. of secs. 15,16,21, and 22.

Thence
S.89°48'W., on true line bet. secs. 16 and 21.
Over mountainous land, through scattering undergrowth.
Asc. 58 ft. over E. slope.
4.60 Thence across level mesa land.
28.30 Ridge brs N. and S.; desc. 68 ft. over W. slope.
36.16 Draw, course NW.; desc. 40 ft. along gentle N. slope.
40.04 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in
the ground to bed rock, deposit a stone marked with a
cross (X) at base of post, and raise mound of stone
around post, for 1/4 sec. cor., marked on brass cap

1/4 s16

s21
1925

No bearing trees available.
Asc. gentle NE. slope 40 ft.
51.36 Small spur, slopes NE.; asc. 16 ft. over N. slope.
60.52 Thence along N. slope.
62.22 Spur, slopes N.; desc. 127 ft. over NW. slope.
68.19 Spur, slopes NW.; desc. 309 ft. over SW. slope.
80.08 The cor. of secs. 16,17,20, and 21.

Land, mountainous.
Soil, rocky, 4th rate.
Timber, none.
Undergrowth, cacti, palo verde, catclaw, and ocotilla.

N.0°2'W., bet. secs. 16 and 17.
Over mountainous land, through scattering undergrowth.
Asc. 131 ft. over SW. slope.
5.10 Spur, slopes W.; desc. 94 ft. over N. slope.
10.60 Draw, course W.; asc. 271 ft. over SW. slope.
21.40 Spur, slopes W.; desc. 248 ft. over N. slope.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
the ground, for 1/4 sec. cor., marked on brass cap

1/4
s17 | s16

1925

No bearing trees available.
Raise mound of stone; 2 ft. base, 1 1/2 ft. high, W. of cor.
Desc. 18 ft. over N. slope.
44.72 Draw, 5 lks. wide, course W.; asc. 252 ft. over S. slope.
57.69 Spur, slopes W.; desc. 107 ft. over W. slope.
69.63 Head of draw, course SW.; asc. 54 ft. over SW. slope.
75.70 Same draw, course SE.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in
the ground to bed rock, deposit a stone marked with a
cross (X) at base of post, and raise a mound of stone
around post, for cor. of secs. 8,9,16, and 17., marked
on brass cap

T8N R1E
S 8 | S 9

s17 | s16

1925

No bearing trees available.

Survey of the Subdivision of T8N,R1E.

Chains.

Land, mountainous.
Soil, rocky, 4th rate.
Timber, none.
Undergrowth, cacti, ocotilla, catclaw, and buckbrush.

40.00 N.89°48'E., on random line bet. secs. 9 and 16.
Set temp. $\frac{1}{4}$ sec. cor.
79.96 Fall 9 lks. S. of the cor. of secs. 9,10,15, and 16.

Thence
S.89°44'W., on true line bet. secs. 9 and 16.
Over mountainous land, through scattering undergrowth.
Desc. 18 ft. over NW. slope.
4.95 Draw, 10 lks. wide, course NE.; asc. 545 ft. over NE. slope.
39.05 Wire fence, brs N. and S.
39.98 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 9
S16
1925

40.00 No bearing trees available.
Ridge, brs N. and S.; desc. 255 ft. over NW. slope.
58.08 Draw, 10 lks. wide, course N.; asc. 145 ft. over NE. slope.
71.56 Fence, brs N. and S.;
74.25 Ridge, brs NW. & SE.; desc. 60 ft. over broken SW. slope.
79.96 The cor. of secs. 8,9,16, and 17.

Land, mountainous.
Soil, rocky, 4th rate.
Timber, none.
Undergrowth, cacti, ocotilla, mesquite, and catclaw.

5.50 N.0°2'W., bet. secs. 8 and 9.
11.12 Over mountainous land, through scattering undergrowth.
17.60 Asc. 124 ft. over SW. slope.
32.55 Ridge, brs NW. & SE.; asc. 60 ft. over E. slope.
40.00 Spur, slopes NE.; desc. 118 ft. over N. slope.
Head of draw, course E.; asc. 192 ft. over S. slope.
Ridge, brs E. and W.; desc. 127 ft. over NW. slope to
Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S 8 | S 9
1925

44.69 No bearing trees available.
Desc. gradually over W. slope.
44.69 Spur, slopes NW. Desc. 457 ft. over N. slope.
Spring brs N.42 $\frac{1}{2}$ °W.
Ranch house brs N.32 $\frac{1}{2}$ °W.
58.25 Draw, 20 lks. wide, course E.; asc. 233 ft. over SE. slope.
60.55 Old road, brs E. and W.
72.00 Spring brs S.47 $\frac{1}{2}$ °W.
72.00 Ranch house brs N.74°W.
Continue along E. slope.

Survey of the Subdivision of T8N, R1E.

Chains.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 4, 5, 8, and 9, marked on brass cap

| | |
|---------|-----|
| T8N R1E | |
| S 5 | S 4 |
| S 8 | S 9 |

1925.

No bearing trees available.

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, mountainous.

Soil, sandy and gravelly, 2nd rate.

Timber, none.

Undergrowth, catclaw, greasewood, and cacti.

40.00 N. 89°44'E., on random line bet. secs. 4 and 9.
Set temp. $\frac{1}{4}$ sec. cor.

80.18 Fall 9 lks. S. of the cor. of secs. 3, 4, 9, and 10.

Thence

S. 89°40'W., on true line bet. secs. 4 and 9.

Over mountainous land, through scattering undergrowth.

Desc. 350 ft. over SW. slope.

20.53 Spur, slopes S.; continue descent.

31.70 Draw, 5 lks. wide, course S.; asc. 49 ft. over SE. slope.

37.40 Spur, slopes SE.; desc. 14 ft. over S. slope.

40.09 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

| |
|-------------------|
| $\frac{1}{4}$ S 4 |
|-------------------|

| |
|------|
| S 9 |
| 1925 |

No bearing trees available.

Raise mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

Along S. slope.

45.60 Spur, slopes SW.; desc. 232 ft. over W. slope.

63.00 Draw, 20 lks. wide, course SE.; asc. 25 ft. over E. slope

64.55 Spur, slopes SE.; desc. 23 ft. over W. slope.

68.18 Draw, course SE.; asc. 236 ft. over E. slope.

80.18 The cor. of secs. 4, 5, 8, and 9.

Land, mountainous.

Soil, rocky and sandy, 3rd and 4th rate.

Timber, none.

Undergrowth, cacti, greasewood, mesquite, and catclaw.

40.00 North, on random line bet. secs. 4 and 5.
Set temp. $\frac{1}{4}$ sec. cor.

65.72 Intersect the 2nd Standard Parallel North, 11 lks. W. of the standard cor. of secs. 32 and 33, which is an iron post, 2 ins. in diam., firmly set, properly marked on brass cap, and witnessed by a mound of stone, 3 ft. base, 2 ft. high, N. of cor. Alter this cor. monument to refer to secs. 4, 5, 32, and 33, by changing marking on brass cap to read

| | |
|---------|-----|
| SC | |
| T9N R1E | |
| S32 | S33 |
| S5 | S4 |
| T8N | |
| 1918-25 | |

Survey of the Subdivision of T8N, R1E.

Chains.

Thence

S.0°6'W., on true line bet. secs. 4 and 5.

Over mountainous land, through scattering undergrowth.
Desc. 97 ft. over steep S. slope.8.42 Cottonwood creek, dry, 70 lks. wide, course SE.; asc.
141 ft. over N. slope.

17.06 Spur, slopes E.; desc. 172 ft. over S. slope.

25.72 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap $\frac{1}{4}$

S 5 | S 4

1925

No bearing trees available.

Raise mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
Desc. 140 ft. over SE. slope.

36.22 Draw, course SE.; asc. 257 ft. over E. slope.

60.99 Spur, slopes E.; desc. 50 ft. over SE. slope.

65.72 The cor. of secs. 4, 5, 8, and 9.

Land, mountainous.

Soil, rocky, 3rd rate.

Timber, none.

Undergrowth, palo verde, ocotilla, and catclaw.

From the temporary cor. of secs. 29, 30, 31, and 32 on
the sectional correction line.

S.0°3'E., on random line bet. secs. 31 and 32.

40.00 Set temp. $\frac{1}{4}$ sec. cor.81.26 Fall 10 lks. N. E. of the reestablished cor. of
secs. 31 and 32, on the S. bdy. of the Tp. hereinbefore
described.

Thence

N.0°3'W., on true line bet. secs. 31 and 32.

Over rolling mountains, through medium undergrowth.

Desc. 78 ft. over NW. slope.

4.89 Wash, 10 lks. wide, course W.; asc. 45 ft. to

8.28 Spur, slopes W.; desc. 83 ft. over N. slope. to

11.90 Wash, 15 lks. wide, course W.; asc. 152 ft. over S. slope.

30.10 Spur, slopes NW.; desc. 105 ft. over N. slope.

36.10 Wash, 10 lks. wide, course W.; asc. 60 ft over S. slope.

40.00 Spur, slopes W.; desc. slightly over N. slope.

41.26 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in
the ground to bed rock, deposit a stone marked with a
cross (X) at base of post, and raise a mound of stone
around post, for $\frac{1}{4}$ sec. cor., marked on brass cap $\frac{1}{4}$

S31 | S32

1925

No bearing trees available.

Desc. 81 ft. over N. slope.

44.60 Ravine, course W.; asc. 82 ft. over S. slope.

50.20 Spur, slopes W.; desc. 84 ft. over NW. slope.

60.00 Wash, 10 lks. wide, course W.; asc. 41 ft. over S. slope.

61.20 Slope changes; desc. 87 ft. along W. slope.

66.40 Browns house brs East, 7.00 chs. dist.

74.30 Humbug Creek, dry, from the North, course S.15°W.

78.80 Leave Humbug Creek, course S., from N.15°W..

Survey of the Subdivision of T8N, R1E.

Chains.

Asc. 20 ft. over SW slope.

- 81.26 Intersect the sectional correction line 10 lks. W. of the temp. cor. of secs. 29, 30, 31, and 32, or 80.14 chs. west of the cor. of secs. 29, 30, 31, and 32. At point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for cor. of secs. 29, 30, 31, and 32, marked on brass cap

| | |
|-----|-----|
| T8N | R1E |
| S30 | S29 |
| S31 | S32 |

1925

No bearing trees available.

Land, rolling mountains.
Soil, rocky and sandy, 3rd rate.
Timber, none.
Undergrowth, palo verde, cacti, and greasewood.

From the cor. of secs. 28, 29, 32, and 33.
West, on true line bet. secs. 29 and 32 on sectional correction line.

Over mountainous land, through scattering undergrowth.
Asc. 95 ft. over E. slope.

- 7.07 Spur, slopes S.; desc. 50 ft. over W. slope.
25.57 Wash, 20 lks. wide, course S.; asc. 78 ft. over E. slope.
31.57 Spur, slopes S.; desc. 52 ft. over W. slope.
37.94 Wash, 10 lks. wide, course S.; asc. 20 ft. over E. slope.
40.07 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor., marked on brass cap

 $\frac{1}{4}$ S29S32
1925

No bearing trees available.

- 45.07 Asc. 101 ft. over E. slope.
Ridge, brs N. and S.
Road on top of ridge, brs N. and S.
Desc. 173 ft. over W. slope.
80.14 The cor. of secs. 29, 30, 31, and 32.

Land, rolling mountains.
Soil, rocky and sandy, 3rd rate.
Timber, none.
Undergrowth, palo verde, catclaw, cacti, and ocotilla.

Thence

- West, on true line on sectional correction line bet. secs. 30 and 31.
Over rolling mountains, through medium undergrowth.
Desc. 24 ft. over W. slope.
2.30 Humbug Creek, with stream of water, 2 lks. wide, 2 ins. deep, course S.; asc. 151 ft. over SE. slope.
20.04 Spur, slopes S.; desc. 57 ft. over W. slope.
23.84 Draw, 10 lks. wide, course S.; asc. 301 ft. over E. slope.

Survey of the Subdivision of T8N, R1E.

Chains.

38.68 Spur, slopes S.; desc. 28 ft. over SW. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for 1/4 sec. cor., marked on brass cap


1/4 S30

S31
1925

No bearing trees available.

63.30 Desc. 178 ft. over SW. slope.
 Draw, 50 lks. wide, course SE.; asc. 62 ft. over SE. slope.

80.18 Intersect the west bdy. of the Tp. (G. & S.R. Mer.) at a point 10° 81' chs. N. 0° 6' E. of the cor. of secs. 25 and 30, T. 8 N., R. 1 W. hereinbefore described.
 At point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for closing cor. of secs. 30 and 31, marked on brass cap



1925

No bearing trees available.

Land, mountains.
 Soil, sandy and rocky, 3rd rate.
 Timber, scattering cottonwood along Humbug creek.
 Undergrowth, cacti, palo verde, and ocotilla.

From cor. of secs. 29, 30, 31 and 32.
 N. 0° 3' W., bet. secs. 29 and 30.
 Over rolling mountains, through scattering undergrowth.
 Asc. 13 ft. over W. slope.
 15.00 Desc. 21 ft. over W. slope.
 16.60 Humbug Creek, dry, 60 lks. wide, course SW.
 23.13 Humbug Creek, dry, 70 lks. wide, course SE.
 Asc. 70 ft. over W. slope.
 35.83 Wash, 10 lks. wide, course W.; asc. slightly.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 5 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for 1/4 sec. cor., marked on brass cap.

1/4

S30 | S29

1925

No bearing trees available.
 Asc. along gentle W. slope, to cor.

74.25 Draw, 5 lks. wide, course W.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for cor. of secs. 19, 20, 29, and 30, marked on brass cap

Survey of the Subdivision of T8N, R1E.

Chains.

T8N R1E

S19 | S20

S30 | S29

1925

No bearing trees available.

Land, mountainous.

Soil, rocky and sandy, 4th rate.

Timber, none.

Undergrowth, cacti, palo verde, ocotilla, and catclaw.

East, on random line bet. secs. 20 and 29.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.00 Fall 16 lks. N. of the cor. of secs. 20, 21, 28, and 29.

Thence

N. $89^{\circ}53'$ W., on true line bet. secs. 20 and 29.

Over rolling mountains, through scattering undergrowth.

Desc. 300 ft. over W. slope.

19.00 Wash, 50 lks. wide, course SW.; asc. 140 ft. over SE. slope.

25.00 Spur, slopes S.; desc. 150 ft. over W. slope.

30.00 Tule Creek, (dry) 50 lks. wide, course S.; asc. 150 ft. over E. slope

40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor., marked on brass cap $\frac{1}{4}$ S20

S29

1925

No bearing trees available.

Asc. 256 ft. over E. slope.

51.55 Spur, slopes N.; desc. 394 ft. over broken W. slope.

59.58 Ridge, brs N. and S.; continue desc.

62.80 Head of draw, course SW.; continue desc.

72.64 Draw, course SW.; continue desc.

80.00 The cor. of secs. 19, 20, 29, and 30.

Land, mountainous.

Soil, sandy and rocky, 3rd and 4th rate.

Timber, none.

Undergrowth, cacti, ocotilla, palo verde, and catclaw.

West, on true line bet. secs. 19 and 30.

Over rolling mountains, through scattering undergrowth.

Desc. slightly.

3.00 Draw, course SW.; desc. 108 ft. over SW. slope.

14.99 Draw, 10 lks. wide, course SW.; asc. 88 ft. over SE. slope.

20.44 Spur, slopes S.; desc. 126 ft. over SW. slope.

29.57 Humbug creek, 2 lks. wide, 10 ins. deep, course S.

Asc. 124 ft. over E. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor., marked on brass cap $\frac{1}{4}$ S19

S30


1925

Survey of the Subdivision of T8N, R1E.

Chains.

No bearing trees available.

- Asc. 172 ft. over broken E. slope.
 - 52.26 Spur, slopes S.; desc. 26 ft. over W. slope.
 - 55.50 Draw, course S.; asc. 236 ft. over E. slope.
 - 78.30 Spur, slopes S.; desc. 16 ft. over W. slope.
 - 78.40 Fence, brs N. and S.
 - 80.08 Intersect W. bdy. of Tp. (G. & S. R. Mer.)... at a point 10.32 chs. N. 0° 6' E., of the cor. of secs. 24 and 25, T8N, R1W. hereinbefore described.
- At point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for closing cor. of secs. 19 and 30, marked on brass cap




1925

No bearing trees available.

Land, mountainous.
 Soil, rocky, 3rd rate.
 Timber, scattering cottonwood along Humbug greek.
 Undergrowth, cacti, ocotilla, catclaw, and palo verde.

- From cor. of secs. 19, 20, 29 and 30, N. 0° 3' W., bet. secs. 19 and 20.
- Over rolling mountains, through scattering undergrowth.
- Asc. 352 ft. over SW. slope.
- 8.14 Draw, 5 lks. wide, course SW.; asc.
- 13.93 Spur, slopes SW.; continue asc.
- 17.52 Head of draw, course SW.; asc.
- 21.02 Spur, slopes SW.; desc. 243 ft. over NW. slope.
- 31.78 Draw, 5 lks. wide, course SW.; asc. 81 ft. over SW. slope.
- 39.40 Draw, course SW.; asc. slightly to cor.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor., marked on brass cap



1925

- No bearing trees available.
- Asc. 218 ft. over broken SW. slope.
- 49.89 Spur, slopes SW.; desc. 52 ft. over N. slope.
- 53.70 Draw, 5 lks. wide, course SW.; asc. 164 ft. over S. slope.
- 58.86 Spur, slopes SW.; desc. 25 ft. over NW. slope.
- 62.12 Draw, 10 lks. wide, course SW.; asc. 405 ft. over steep SE. slope.
- 74.31 Spur, slopes SW.; then along W. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for cor. of secs. 17, 18, 19, and 20, marked on brass cap

Survey of the Subdivision of T8N, R1E.

Chains.

T8N R1E
S18 | S17
S19 | S20

1925

No bearing trees available.

Land, mountainous.

Soil, sandy and rocky, 3rd rate.

Timber, none.

Undergrowth, oak brush, palo verde, and catclaw.

S.89°53'E., on random line bet. secs. 17 and 20.

40.00 Set temp. 1/4 sec. cor.

80.00 Fall 21 lks. S. of the cor. of secs. 16, 17, 20, and 21.

Thence

S.89°58'W., on true line bet. secs. 17 and 20.

Over mountainous land, through scattering timber and undergrowth.

Desc. 238 ft. over W. slope.

13.90 Draw, course S.; asc. 224 ft. over SE. slope.

28.00 Spur, slopes SE.; desc. 132 ft. over SW. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for 1/4 sec. cor., marked on brass cap

1/4 S17

S20
1925

No bearing trees available.

Desc. 27 ft. over SW. slope.

42.90 Draw, 10 lks. wide, course SE.; asc. 591 ft. over NE. slope

54.75 Draw, 6 lks. wide, course NE.; continue ascent.

72.00 Spur, slopes S.; desc. 123 ft. over W. slope.

80.00 The cor. of secs. 17, 18, 19, and 20.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, none.

Undergrowth, cacti, palo verde, ocotilla and catclaw

West, on true line bet. secs. 18 and 19.

Over mountainous land, through scattering undergrowth.

Desc. 483 ft. over SW. slope.

19.20 Draw, course SW.; asc. along S. slope 50 ft.

24.70 Spur, slopes S.; desc. 134 ft. over SW. slope.

32.60 Draw, 5 lks. wide, course SW.; asc. 141 ft. over SE. slope.

38.94 Spur, slopes S.; desc. 42 ft. over W. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for 1/4 sec. cor., marked on brass cap


1/4 S18

S19
1925

Survey of the Subdivision of T8N, R1E.

Chains.


No bearing trees available.
 Desc. 282 ft. over W. slope.
 53.56 Draw, 5 lks. wide, course S.; asc. 86 ft. over E. slope.
 58.33 Spur, slopes S.; desc. 144 ft. over W. slope.
 68.00 Draw, course S.; asc. 40 ft. over E. slope.
 72.37 Spur, slopes SW.; desc. 57 ft. over NW. slope.
 77.00 Asc. 19 ft. over E. slope.
 78.96 Spur, slopes SW.; desc. 22 ft. over W. slope.
 79.79 Intersect W. bdy. of T8N, R1E. Meridian at point 10.17 chs. N.0°6'E., of the cor. of secs. 13 and 24, T8N, R1E., hereinbefore described.
 At point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for the closing cor. of secs. 18, and 19, marked on brass cap



1925


No bearing trees available.
 Raise mound of stone, 3 ft. base, 2 ft. high, E. of cor.
 Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, cacti, palo verde, and ocotilla.

From cor. of secs. 17, 18, 19 and 20,
 N.0°3'W., bet. secs. 17 and 18.
 Over rough mountains, through light undergrowth.
 Asc. 63 ft. over SW. slope.
 2.23 Spur, slopes W.; desc. 159 ft. over NW. slope.
 14.93 Draw, 5 lks. wide, course SW.; asc. 243 ft. over SW. slope.
 24.24 Spur, slopes SE.; asc. 243 ft. over SE. slope.
 36.57 Spur, slopes SE.; desc. 100 ft. over N. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



1925

No bearing trees available.
 Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Desc. 212 ft. over N. slope.
 47.85 Draw, 5 lks. wide, course SE.; asc. 721 ft. over SW. slope.
 78.55 Ridge, brs E. and W.; desc. 74 ft. over N. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 7, 8, 17, and 18, marked on brass cap



1925

No bearing trees available.
 Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Land, mountainous.
 Soil, sandy, 2nd rate.
 Undergrowth, oak brush, catclaw, and mahogany.

Survey of the Subdivision of T8N, R1E.

Chains.

N. 89° 58' E., on random line bet. secs. 8 and 17.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.10 Fall 19 lks. S. of the cor. of secs. 8, 9, 16, and 17.

Thence
 S. 89° 50' W., on true line bet. secs. 8 and 17.
 Over rough mountains, through light undergrowth.
 Asc. 83 ft. over broken S. slope.
 13.50 Desc. 74 ft. over W. slope.
 16.20 Draw, 5 lks. wide, course S.; asc. E. slope 207 ft.
 27.00 Spur, slopes SW.; continue ascent.
 40.05 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

 $\frac{1}{4}$ S 8S17
1925

No bearing trees available.
 Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 Asc. 574 ft. over broken S. slope.
 73.64 Ridge, brs S. 70° W. and N. 70° E.
 80.10 Desc. along general N. slope 60 ft.
 The cor. of secs. 7, 8, 17, and 18.

Land, mountainous.
 Soil, sandy and gravelly, 3rd. rate.
 Timber, none.
 Undergrowth, oak brush, mountain mahogany, cacti, and
 ocotilla.

West, on true line bet. secs. 7 and 18.
 Over rough mountains, through scattering undergrowth.
 Desc. 439 ft. over NW. slope.
 29.50 Draw, 10 lks. wide, course SW.; asc. 121 ft. over S.
 slope.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in
 the ground to bed rock, deposit a stone marked with a
 cross (X) at base of post, and raise a mound of stone
 around post, for $\frac{1}{4}$ sec. cor., marked on brass cap

 $\frac{1}{4}$ S 7S18
1925


No bearing trees available.
 Asc. slightly over SE. slope.
 45.72 Spur, slopes SW.; desc. 887 ft. over W. slope.
 79.49 Intersect W bdy. of Tp. (G. & S. R. Mer.) at point, 10.32 chs.
 N. 0° 6' E. of the cor. of secs. 12 and 13, T8N, R1W.,
 hereinbefore described.
 At point of intersection, set an iron post, 3 ft. long,
 2 ins. in diam., 27 ins. in the ground, for closing cor.
 of secs. 7 and 18, marked on brass cap

T8N
 R1W R1E
 S12 | S 7 CC
 | S18
 1925


No bearing trees available.
 Raise mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, E. of cor.
 Land, mountainous.
 Soil, rocky and sandy, 4th rate. Timber, none
 Undergrowth, cacti, ocotilla, catclaw, and palo verde

Survey of the Subdivision of T8N, R1E.

Chains. From cor. of secs. 7, 8, 17 and 18,
 N.0°3'W., bet. secs. 7 and 8.
 Over mountainous land, through light undergrowth.
 Desc. 231 ft. over N. slope.
 10.50 Draw, 5 lks. wide, course SW.; asc. 86 ft. over S. slope.
 17.74 Spur, slopes W.; desc. 441 ft. over NW. slope.
 24.40 Spur, slopes NW.; desc.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in
 the ground to bed rock, deposit a stone marked with a
 cross (X) at base of post, and raise a mound of stone
 around post, for 1/4 sec. cor., marked on brass cap




No bearing trees available.
 Desc. 28 ft. over NW. slope.
 45.00 Swilling Gulch, 10 lks. wide, course SW.; asc. 383 ft. over S. slope
 52.05 Old road, brs E. and W.
 56.09 Slope changes to SW.
 70.51 Spur, slopes NW.; desc. 138 ft. over N. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. dn diam., 27 ins.
 in the ground, for cor. of secs. 5, 6, 7, and 8, marked
 on brass cap



No bearing trees available.
 Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.
 Land, mountainous.
 Soil, rocky and sandy, 4th rate.
 Timber, none.
 Undergrowth, cacti, ocotilla, and palo verde.

40.00 N.89°50'E., on random line bet. secs. 5 and 8.
 Set temp. 1/4 sec. cor.
 80.30 Fall 12 lks. N. of the cor. of secs. 4, 5, 8, and 9.

Thence
 S.89°55'W., on true line bet. secs. 5 and 8.
 Over mountainous land, through scattering undergrowth.
 Asc. 75 ft. over E. slope.
 2.30 Spur, slopes S.; desc. 200 ft. over W. slope.
 15.30 Draw, course SE.; asc. 175 ft. over E. slope.
 20.30 Draw, course S.; continue asc.
 40.15 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in
 the ground to bed rock, deposit a stone marked with a
 cross (X) at base of post, and raise a mound of stone
 around post, for 1/4 sec. cor., marked on brass cap



No bearing trees available.
 Asc. 135 ft. over E. slope.
 55.03 Spur, slopes S.; desc. 201 ft. over N. slope.
 59.00 Head of draw, course NW.; continue descent.
 64.17 Wire fence, brs N. and S.
 70.68 Spur, slopes N.; continue descent.
 76.50 Draw, 5 lks. wide, course N.; asc. 10 ft. over N. slope.

Survey of the Subdivision of T8N, R1E.

Chains.

80.30 The cor. of secs. 5, 6, 7, and 8.

Land, mountainous.
Soil, rocky, 3rd rate.
Timber, none.
Undergrowth, palo verde, cacti, and ocotilla.

West, on true line bet. secs. 6 and 7.
Over mountainous land, through light undergrowth.
Desc. 379 ft. over NW. slope to

18.90 Carpenter Gulch, course SW. Desc. slightly over SW. slope to
23.70 Draw, 30 lks. wide, course S.; asc. 84 ft. over E. slope.
27.24 Mine shaft brs N. 32° W., 7.00 chs. dist.
27.34 Spur, slopes S.; desc. 91 ft. over W. slope.
31.05 Draw, 15 lks. wide, course S.; asc. 103 ft. over broken
E. slope.
32.85 Old mine road, brs NE. and SW.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
the ground, for 1/4 sec. cor., marked on brass cap

1/4 S 6
S 7
1925

No bearing trees available.
Raise mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.
Asc. 148 ft. over E. slope.
49.20 Ridge, brs N. and S.; desc. 340 ft. over W. slope.
69.41 Rock Wall Gulch, (dry) 70 lks, wide, course SE.
Asc. 136 ft. over E. slope.

79.20 Intersect W. bdy. of T. 6. & S. R. Mer. at point 10.22 chs.
N. 0° 6' E., of the cor. of secs. 1 and 12, T8N, R1W, here-
inbefore described.
At point of intersection, set an iron post, 3 ft. long,
2 ins. in diam., 12 ins. in the ground to bed rock,
deposit a stone marked with a cross (X) at base of post,
and raise a mound of stone around post, for closing cor.
of secs. 6 and 7, marked on brass cap

T8N
R1W R1E
S 1 | S 6 CC
| S 7
1925

No bearing trees available.
Land, mountainous.
Soil, 3rd rate., rocky.
Timber, none.
Undergrowth, catclaw, ocotilla, and cacti.

From cor. of secs. 5, 6, 7 and 8,
North, on random line bet. secs. 5 and 6.
40.00 Set temp. 1/4 sec. cor.
65.92 Intersect std. cor. of secs. 31 & 32, T9N., R1E. on 2nd. Std. Par. N.,
which is an iron post, 2 ins. in diam., firmly set,
properly marked on brass cap, and witnessed by mound of
stone, 2 ft. base, 1 1/2 ft. high, N. of cor. Alter this
this cor. monument to refer to secs. 5, 6, 31, and 32
by changing marking on brass cap, to read

Survey of the Subdivisions of T8N, R1E.

Chains.

SC
T9N R1E
S31 | S32
S6 | S5
T8 N 5
1918-25
1918

Thence
South, on true line bet. secs. 5 and 6.
Over mountainous land, through light undergrowth.
Asc. 70 ft. over NE. slope.
8.00 Spur, slopes SE.; desc. 288 ft. over S. slope.
21.92 Draw, course SE.; then along broken SE. slope.
25.92 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S 6 | S 5
1925

33.22 Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
Desc. slightly over SE. slope.
35.05 Draw, course SW; asc. 90 ft. over NW. slope.
38.62 Spur, slopes SW.; desc. 39 ft. over SW. slope.
Draw, 10 lks. wide, course SW.; asc. 104 ft. over W.
slope.
48.18 Spur, slopes W.; desc. 238 ft. over S. slope.
60.00 Draw, 10 lks. wide, course W.; asc. 134 ft. over N. slope.
65.92 The cor. of secs. 5, 6, 7, and 8.

Land, mountainous.
Soil, rocky, 4th rate.
Timber, none.
Undergrowth, catclaw, and palo verde.

FINAL TEST OF INSTRUMENTS

A final test of Young and Sons light mountain transits No's 8478 and 8487, was made on Nov. 21, 1925 by Glenn F. Sawyer, U.S.S. and Wesson Cook, U.S.T. on meridian previously established in the NE. cor. of sec. 31, T8N, R1E., and described on page 2 herein.

November 21, 1925:

At 7h Om a.m., l.m.t., we examine the adjustments of the transits and find them correct; then to test the solar apparatus, by comparing their indications, resulting from observations made during a.m. and p.m. hours with a meridian established by Polaris, described on page 2.

At 8h Om a.m., l.m.t., we set off $34^{\circ}N$ on the lat. arcs, $19^{\circ}50\frac{1}{2}'S$ on the decl. arcs; and determine a meridian with the solars, which we find to agree with the true meridian.

At apparent noon, with the lat. arcs unchanged, we observe the sun on the meridian; the resulting reading of each decl. arc is $19^{\circ}55'S$., which agrees with the computed decl. of the sun.

At 4h Om., p.m., l.m.t., with the lat arcs unchanged, we set off $19^{\circ}55'S$. on the decl. arcs and determine a meridian with each solar, which we find to agree with in 1' of the true meridian.

As all of the solar observations during the usual hours of solar work come within 1' of the true meridian, we conclude that the instruments were maintained in satisfactory adjustment, throughout the survey of this township

Boundaries of Township 8 North, Range 1 East.

Latitudes, departures, and closing errors.

| Line designated | True course | Dist. | Latitudes | | Departures | |
|--|---------------------|-----------------|-----------|--------|-----------------|--------|
| | | | N | S | E | W |
| South boundary, | S.89°24'W | 40.11 | | .42 | | 40.11 |
| | S.89°02'W | 39.76 | | .67 | | 39.75 |
| | N.89°45'W | 41.47 | .18 | . | | 41.47 |
| | S.89°59'W | 40.10 | | .01 | | 40.10 |
| | S.89°44'W | 39.61 | | .19 | | 39.61 |
| | S.89°41'W | 40.00 | | .22 | | 40.00 |
| | N.89°51'W | 79.74 | .21 | | | 79.74 |
| | N.89°44'W | 40.06 | .19 | | | 40.06 |
| | S.89°58'W | 39.75 | | .02 | | 39.75 |
| | N.89°54'W | 40.10 | .07 | | | 40.10 |
| | N.89°51'W | 39.50 | .10 | | | 39.50 |
| West boundary (G. & S.R. Mer.) | N.0°6'E | 466.87 | 466.87 | | .82 | |
| North boundary, (2nd. Std. Par. N.) | S.89°48'E. East, | 39.00 440.06 | | .14 | 39.00 440.06 | |
| East boundary, | South, | 464.88 | | 464.88 | | |
| Convergency, | | | | | .49 | |
| Total | | | 467.56 | 466.55 | 480.37 | 480.19 |
| | | | 466.55 | | 480.19 | |
| Error in lat.----- | | | 1.01 | | .18 | |
| | | | | | 0.18 | |

GENERAL DESCRIPTION

LAND: The drainage of this township is to the south, coming from the main range of the Bradshaw mountains. The elevation above sea level ranges from 2500 ft. to 3800 ft.

SOIL: The soil is sandy and rocky in parts and a granite formation in the higher hills ranging from 2nd to 4th rate.

TIMBER: Scattering cottonwood along creeks.

UNDERGROWTH: Cacti, ocotilla, palo verde, catclaw, sage brush, mesquite, and fair grass.

EVIDENCE OF MINERAL:

Considerable mining has been done around Tip Top, Bald Hill, Gold Hill, and the west and northwest parts of the township. Most of the mines are not in operation now, although a little prospecting is being done in places.

WATERING PLACES: Humbug, Boulder, and Tule creeks run through the township and have good water in them. We also found other small streams and springs.

SETTLEMENT: R. L. Brown, a sheep man lives in the northwest quarter. of sec. 32. We found a watchman at the old mines at Columbia and a few prospectors around the Tip Top mines. A cattleman lives in sec. 8.

INDUSTRY: The township is adapted to mining and
 grazing.

4-680

FIELD ASSISTANTS. to

Glenn F. Sawyer, U.S.S. and Wesson Cook, U.S.T.

| NAMES. | CAPACITY. |
|-------------------|-----------------|
| Ray Bell | First chairman |
| Harry Smith | First chairman |
| Donald Price | Second chairman |
| E.S. Butler | Second chairman |
| R. L. Shackelford | Flagman |
| Roy Marshall | Flagman |
| Pat Easton | Cornerman |
| Phillip H. Taylor | Cornerman |
| M. Harrington | Axeman |
| Otis Easton | Axeman |
| | |
| | |
| | |
| | |
| | |
| | |

CERTIFICATE OF UNITED STATES SURVEYOR AND UNITED STATES TRANSITMAN.

We, Glenn F. Sawyer, U.S. Surveyor, and Wesson Cook, U.S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 129, Arizona,

bearing date of the 10th day of April, 1924 we have well, faithfully, and truly in our own proper persons, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the Gila and Salt River Meridian in T. 8 N., and the South bdy. of T. 8 N., R. 1 E.,

and surveyed all those parts or portions of the Subdivision lines of

TOWNSHIP 8 NORTH, RANGE 1 EAST,

of the Gila and Salt River Base and Meridian, in the State of Arizona,

and by diagram on page 1 hereof the foregoing field notes as having been executed by us, and under our direction; and that all the corners of said resurvey and survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 129, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such resurvey and survey.

Phoenix, Ariz. Wesson Cook U. S. Transitman Glenn F. Sawyer U. S. Surveyor November 25, 1925.

Phoenix, Arizona April, 15, 1926

APPROVAL.

Office of U.S. Supervisor of Surveys, GENERAL,

Denver, Colorado, June 23, 1926.

The foregoing field notes of the resurvey of the Gila and Salt River Meridian, thru Township 8 North, and South bdy. of Township 8 North, Range 1 East, and of the survey of the

Subdivision lines of TOWNSHIP 8 NORTH, RANGE 1 EAST,

of the Gila and Salt River Base and Meridian, in the State of Arizona, executed by Glenn F. Sawyer, U.S. Surveyor, and Wesson Cook, U.S. Transitman,

under his special instructions dated April 10, 1924, for Group 129, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the resurveys and surveys they describe, are hereby approved.

U. S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above described surveys in has been correctly copied from the original notes on file in this office.