

ORI 307
1

3737

Book "H"

4-679

BOOK 3737

FIELD NOTES

OF THE RESURVEY OF THE

East Boundary,

West Boundary, and

Subdivision lines of

TOWNSHIP 6 NORTH, RANGE 30 EAST,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

Benjamin J. Kinsey,

U.S. Surveyor,

In the capacity of U. S. Surveyor, under ^{Supplemental} Special Instructions dated August 17, 1925, issued by the ^{U. S. District Cadastral Engineer} ~~United States Surveyor General~~ to govern surveys included in Group No. 127, Arizona, which were approved by the Commissioner of the General Land Office, August 27, 1925, and Assignment Instructions dated May 16, 1925.

Resurvey commenced August 29, 1925.

Resurvey completed October 6, 1925.

3737

3737

3737


Book "H"

Group 127


Arizona

BOOK 3737

INDEX DIAGRAM.

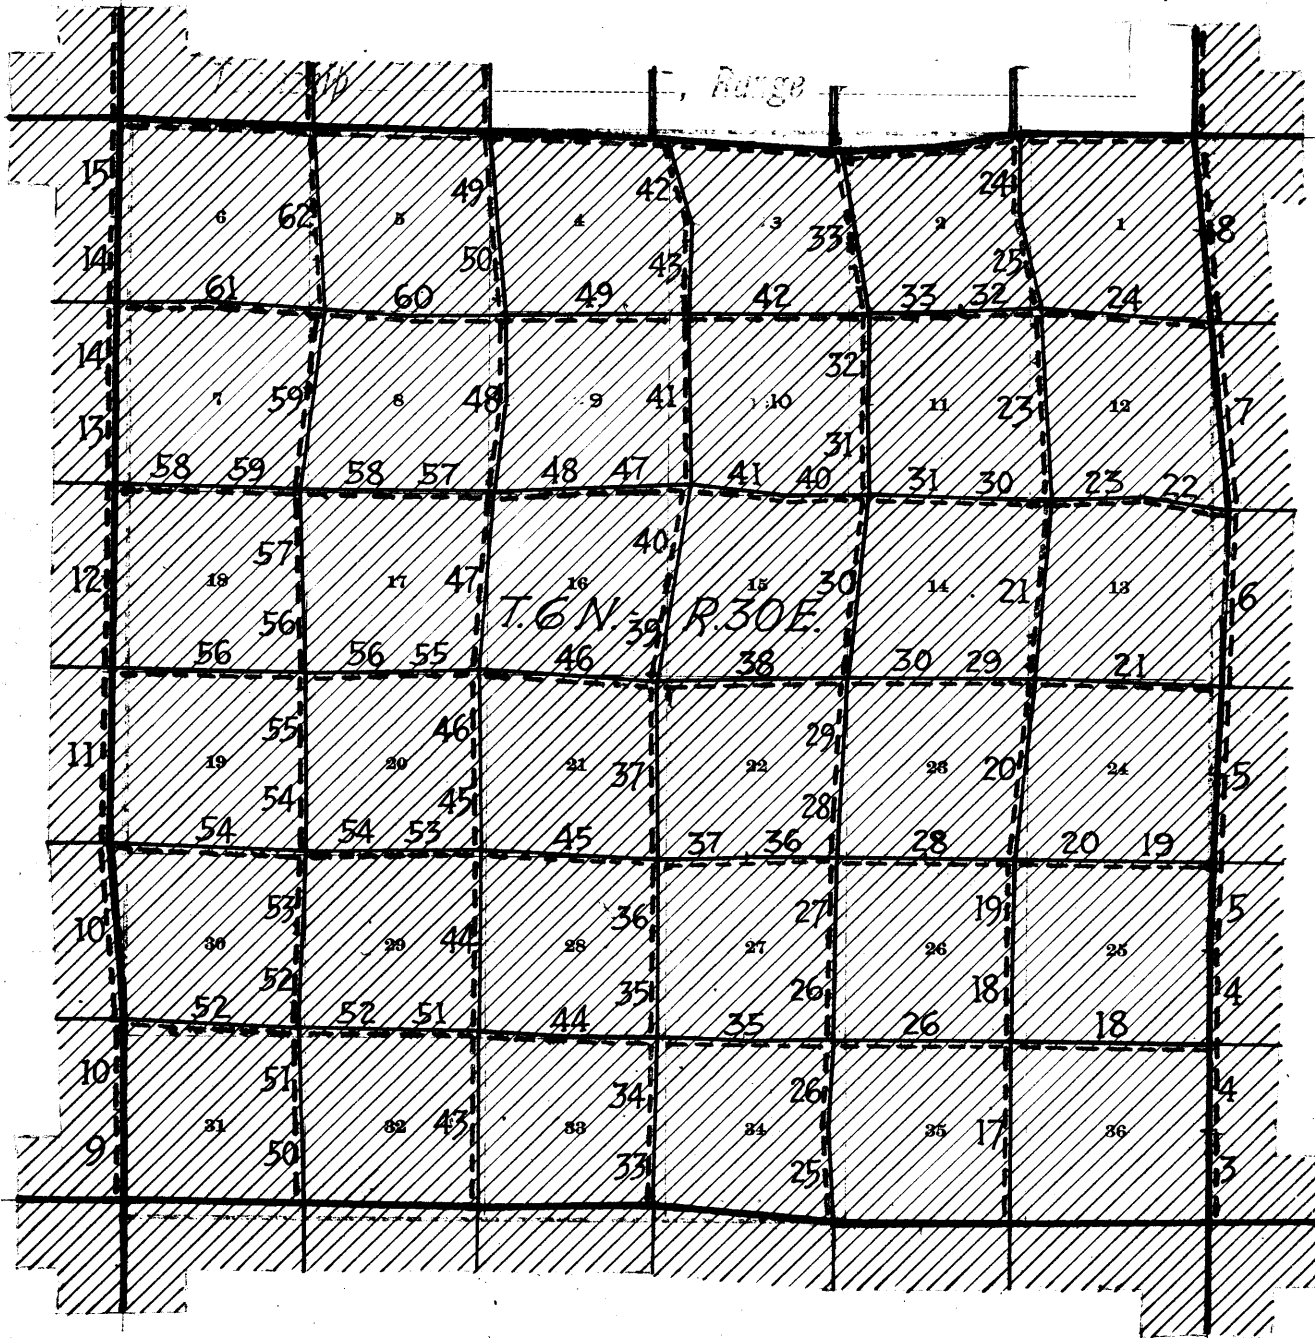

Lines surveyed under this group.



Lines resurveyed under this group.



Accepted surveys.



Areas surveyed as per accepted plats on file.

Book "H"
 Group 127 - Arizona
 Township 6 North, Range 30 East
 ~ DATE DIAGRAM ~
 -1925-

9-26	6	10-2	5	9-14	4	9-9	3	9-18	2	9-18	1	9-25
	9-9		9-9		9-14		9-14		9-12		9-24	
9-17	7	10-6	8	10-6	9	9-14	10	9-12	11	9-23	12	9-24
	10-2		9-28		10-6		9-2		9-3		9-3	
9-17	18	10-1	17	9-28	16	9-9	15	9-26	14	9-23	13	9-5
	10-1		9-30		9-9		9-19		9-19		9-7	
9-29	19	9-30	20	9-30	21	9-15	22	9-19	23	9-23	24	9-5
	9-29		9-22		9-22		9-15		9-1		9-7	
9-21	30	9-21	29	9-22	28	9-15	27	9-8	26	9-1	25	9-5
	9-29		9-29		9-4		9-4		9-4		9-8	
9-21	31	9-16	32	9-16	33	9-16	34	9-4	35	9-5	36	9-5

———— Resurveyed by Benjamin J. Kinsey, U.S. Surveyor, on dates shown thereon.

===== Resurveyed by Benjamin J. Kinsey, U.S. Surveyor, notes and dates in Book "G" of this group.

===== Resurveyed by Wm. B. Kimmel, U.S. Surveyor in 1916 under Group No. 65.

Resurveys herein described were executed by Benjamin J. Kinsey, U.S. Surveyor, on dates shown on diagram on page 1 hereof, using Buff solar transit No. 9940, with U-shaped standards, $4\frac{1}{2}$ inch horizontal circle, 4 inch vertical circle and improved Smith solar attachment; all azimuth determinations are accomplished with the solar attachment except the special observation upon Polaris for meridian upon which to test the solar apparatus as stated in the field notes.

August, 29, 1925, at station in sec. 23, T. 6 N., R. 30 E., Gila and Salt River Base and Meridian, Arizona, in latitude $33^{\circ}53'25''$ N., as determined by the mean of altitude observations on the sun on April, 26, 1925, described on page 2 book "G", this group, and frequently verified by observations on line, and longitude $109^{\circ}09'$ W. of Greenwich, examine the adjustments of the instrument and find no existing errors. Then test the solar apparatus by comparing its indications hourly with the true meridian, established as follows:

At 9h. 6m. 47s., p.m., l.m.t., observe Polaris at eastern elongation, making four observations, two each with the telescope in direct and reversed positions, and marking the mean point in the line thus determined by a tack set in a stake about 5 chs. northerly.

Azimuth of Polaris at eastern elongation: $1^{\circ}19'28''$.

August, 30, lay off the azimuth of Polaris, $1^{\circ}19\frac{1}{2}'$ to the west, and mark the meridian thus determined by a tack set in a stake driven in the ground, about 5 chs. dist.

At 9h 00m., a.m., app.t., set off $33^{\circ}53\frac{1}{2}'$ N. on the lat. arc; $9^{\circ}2\frac{1}{2}'$ N. on the decl. arc and determine a meridian with the solar which agrees with the true meridian.

At app.noon, with the lat. arc unchanged, observe the sun on the meridian; the resultant reading of the decl. arc is $9^{\circ}00'$ N., which agrees with the computed declination of the sun.

At 3h 00m., p.m., app.t., with the lat. arc unchanged, set off $8^{\circ}57\frac{1}{2}'$ N., on the decl. arc and determine a meridian with the solar which agrees with the true meridian.

As all of the observations made during the usual hours of solar work agree within 1' of the true meridian, conclude that the adjustments of the instrument are satisfactory.

All measurements are made with a Lufkin steel tape, 5 chs. in length, compared with a Lufkin Standard and found correct. The measurements are made on the slope, the vertical angle determined and the slope measurements properly reduced to true horizontal distances.


Chains.

The east bdy. of T. 6 N., R. 30 E. was surveyed by W.P. Fitzgerald, U.S.D.S. in 1883, establishing all sec. and $\frac{1}{4}$ sec. cors. thereon with a common reference to areas on both sides of the line. No retracement or resurvey of any part of this line is of record. The following notes describe a resurvey of the entire line, reestablishing missing cor. monuments at proportional intervals between existing cors., and reconstructing all existing cors. by setting an iron post alongside each one. As all of the land on both sides of the line is accepted surveyed area, no change in alignment or in the reference of the cors. is permissible.

The corner of Ts. 5 and 6 N., R. 30 E., and fractional Ts. 5 and 6 N., R. 31 E. reconstructed in original position by W.B. Kimmel, U.S. Surveyor, in 1916, is a porphyry stone 12x6x4 ins. above ground, firmly set, marked with 6 notches on each of E., W., N. and S. faces, and witnessed by four bearing trees:

- A yellow pine, 16 ins. in diam., N. 51° E., 230 lks. dist., marked T6N R31E S31 BT.
- A yellow pine, 20 ins. in diam., S. 52° E., 80 lks. dist., marked T5N R31E S6 BT.
- A yellow pine, 23 ins. in diam., S. 18° W., 48 lks. dist., marked T5NR30ES1 BT.
- A juniper, 24 ins. in diam., N. 54° W., 18 lks. dist., marked T6N R30E S36 BT.

Reconstruct this cor. monument again as follows:
 Alongside old stone cor., set an iron post, 3 ft. long, 3 ins. in diam., 24 ins. in the ground for cor. of Ts. 5 and 6 N., R. 30 E., and frac. Ts. 5 and 6 N., R. 31 E., marked on brass cap,




Thence, N. 0° 31' E., on true line, bet. secs. 31 and 36 (S. $\frac{1}{4}$).
 Over mountainous land, thru. dense timber and undergrowth.
 Ascend 361 ft., over steep S. slope.

- 12.50
- 19.30
- 38.50
- 38.83

Spur, slopes W.
 Descend 77 ft., over NW. slope.
 Head of wash, course SW.
 Ascend 352 ft., over SW. slope, to
 Spur, slopes W. Thence over level top of same.
 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 31 and 36, which is a lava stone 10x14x20 ins., marked $\frac{1}{4}$ on W. face, and firmly set in a mound of stone. The old bearing trees have fallen and rotted away.

Reconstruct this cor. monument as follows:
 Remove the mound of stone, and in center of its position, reset old cor. stone 15 ins. in the ground, and alongside same set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bed rock, and raise a mound of stone around post for $\frac{1}{4}$ sec. cor. of secs. 31 and 36, marked on brass cap,



- from which,
- A yellow pine, 12 ins. in diam., brs. S. 69° E., 37 lks. dist., marked $\frac{1}{4}$ S 31 BT.
 - A spruce, 14 ins. in diam., brs. S. 52° W., 20 lks. dist., marked $\frac{1}{4}$ S 36 BT.

4 Resurvey of East bdy. of Township 6 North, Range 30 East.

Chains.

Thence,
N.0°2'E., on true line, bet. secs. 31 and 36 (N. 2).
Over mountainous land, thru. dense timber and undergrowth.
Across top of spur, sloping W.
1.00 Leave top of spur.
Descend 518 ft., over N. slope.
20.70 Head of wash, course SW.
Ascend 430 ft., over SW. slope, to
38.38 Intersect the original cor. of secs. 25, 30, 31 and 36, which
is a lava stone 16x10x16 ins. above ground, firmly set,
marked with 1 notch on S. face and 5 notches on N. face,
and witnessed by two bearing trees:
A yellow pine, 14 ins. in diam., N. 21° E., 10 lks.
dist., marked T6N R31E S30 BT. and
An aspen, 8 ins. in diam., N. 36° W., 6 lks.
dist., marked T6N R30E S25 BT.
Reconstruct this cor. monument as follows:
Alongside old cor. stone, set an iron post, 3 ft. long,
2 ins. in diam., 24 ins. in the ground for cor. of secs.
25, 30, 31 and 36, marked on brass cap,

T6N	
R30E	R31E
S25	S30
S36	S31
1925	

In addition to the two old bearing trees described above,
establish 4 new bearing trees:

A yellow pine, 12 ins. in diam., brs. N. 44° E., 43
lks. dist., marked T6N R31E S30 BT.
A spruce, 10 ins. in diam., brs. S. 36° E., 11
lks. dist., marked T6N R31E S31 BT.
A yellow pine, 20 ins. in diam., brs. S. 78° W., 54
lks. dist., marked T6N R30E S36 BT.
An oak, 10 ins. in diam., brs. N. 61° W., 48
lks. dist., marked T6N R30E S25 BT.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, yellow pine, spruce, oak, pinyon, juniper and aspen.
Undergrowth, scrub oak and manzanita.

N. 1° 10' E., on true line, bet. secs. 25 and 30 (S. 1/2).
Over mountainous land, thru. dense timber and undergrowth.
Ascend 432 ft., over SW. slope, to
39.86 Intersect the point of original location of the 1/4 sec. cor.
of secs. 25 and 30, determined by measurement, as per
record from one of the original bearing trees, which
is an aspen, 15 ins. in diam., S. 70° E., 23 lks. dist.,
marked 1/4 S BT.
No trace of original SW. bearing tree can be found.
Reconstruct this cor. monument as follows:
At original cor. point, set an iron post, 3 ft. long, 1 in.
in diam., 24 ins. in the ground, for 1/4 sec. cor. of secs.
25 and 30, marked on brass cap,

1/4	
S25	S30
1925	

In addition to the old bearing tree described above, es-
tablish two new bearing trees:

A fir, 40 ins. in diam., brs. N. 37° E., 25 lks.
dist., marked 1/4 S 30 BT.
A fir, 16 ins. in diam., brs. N. 60° W., 48 lks.
dist., marked 1/4 S 25 BT.

Thence,

N. 1° 45' E., on true line, bet. secs. 25 and 30 (N. 2).

Resurvey of East bdy. of Township 6 North, Range 30 East. 5

Chains.	Over mountainous land, thru. dense timber and undergrowth. Ascend 119 ft., over SW. slope, to Thence over rolling W. slope. Spur, slopes W. Descend 57 ft., over N. slope, to										
21.00											
30.00											
40.12	Intersect the original cor. of secs. 19, 24, 25, and 30, which is a lava stone 6x11x15 ins. above ground, firmly set, marked with 2 notches on S. face, and 4 notches on N. face, and witnessed by two bearing trees: A fir, 16 ins. in diam., S. 46° E., 22 lks. dist., marked T6N R31E S30 BT., and An aspen, 12 ins. in diam., N. 20° W., 20 lks. dist., marked T6N R30E S24 BT. Reconstruct this cor. monument as follows: Alongside old stone cor., set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 19, 24, 25 and 30, marked on brass cap, <table style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <tr><td colspan="2" style="text-align: center;">T6N</td></tr> <tr><td style="text-align: center;">R30E</td><td style="text-align: center;">R31E</td></tr> <tr><td style="text-align: center;">S24</td><td style="text-align: center;">S19</td></tr> <tr><td style="text-align: center;">S25</td><td style="text-align: center;">S30</td></tr> <tr><td colspan="2" style="text-align: center;">1925</td></tr> </table> In addition to the old bearing trees described above, establish four new bearing trees: A spruce, 12 ins. in diam., brs. N. 68° E., 23 lks. dist., marked T6N R31E S19 BT. A spruce, 18 ins. in diam., brs. S. 11° E., 70 lks. dist., marked T6N R31E S30 BT. A spruce, 8 ins. in diam., brs. S. 77° W., 71 lks. dist., marked T6N R30E S25 BT. A spruce, 10 ins. in diam., brs. N. 12° W., 25 lks. dist., marked T6N R30E S24 BT. Land, mountainous. Soil, rocky, 3rd and 4th rate. Timber, spruce, yellow pine, fir, aspen and juniper. Undergrowth, scrub oak and manzanita.	T6N		R30E	R31E	S24	S19	S25	S30	1925	
T6N											
R30E	R31E										
S24	S19										
S25	S30										
1925											
14.00	N. 0° 54' E., on true line, bet. secs. 19 and 24. Over mountainous land, thru. dense timber and undergrowth. Descend 287 ft., over NE. slope to $\frac{1}{4}$ sec. cor.										
39.71	Leave timber, brs. E. and W. (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 19 and 24, marked on brass cap, <table style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <tr><td colspan="2" style="text-align: center;">$\frac{1}{4}$</td></tr> <tr><td style="text-align: center;">S24</td><td style="text-align: center;">S19</td></tr> <tr><td colspan="2" style="text-align: center;">1925</td></tr> </table> from which, A spruce, 20 ins. in diam., brs. S. 88° W., 308 lks. dist., marked $\frac{1}{4}$ S 24 BT. No other bearing tree available. Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. No trace of original $\frac{1}{4}$ sec. cor. of secs. 19 and 24 can be found in this vicinity. Thence, over rolling E. slope Descend 138 ft. to sec. cor.	$\frac{1}{4}$		S24	S19	1925					
$\frac{1}{4}$											
S24	S19										
1925											
72.60	Old road, brs. NE and SW.										
79.42	Intersect the original cor. of secs. 13, 18, 19 and 24, which is a lava stone 6x12x24 ins. above ground firmly set, marked with 3 notches on each of N. and S. faces, and witnessed by a mound of stone W. of cor. No bearing trees. Reconstruct this cor. monument as follows: Alongside old cor. stone, set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 13, 18, 19										

6 Resurvey of East bdy. of Township 6 North, Range 30 East.

Chains.

and 24, marked on brass cap,

T6N	
R30E	R31E
S13	S18
S24	S19
1925	

from which,

An aspen, 6 ins. in diam., brs. S. 87° W., 638
lks. dist., marked T6N R30E S24 BT.A spruce, 40 ins. in diam., brs. N. 88° W., 721
lks. dist., marked T6N R30E S13 BT.No other bearing trees available. Rebuild the mound of
stone, 3 ft. base, 1½ ft. high, W. of cor.

Land, mountainous.

Soil, rocky, 4th rate, in S. 20 chs.; elsewhere, black loam,
3rd rate.

Timber, yellow pine, fir, spruce and aspen.

Undergrowth, sagebrush and scrub oak.

17.65

N. 0° 30' E., on true line, bet. secs. 13 and 18 (S. ¼).
Over mountainous land, thru. scattering undergrowth.
Descend gradually over E. and NE. slopes.

28.70

Wash, 120 lks. wide, course NW. Enter rolling land.

Ascend gradually over SW. slope.

36.00

Enter timber, brs. E. and W.

Spur, slopes NW.

40.10

Descend gradually over NW. slope, to

Intersect the original ¼ sec. cor. of secs. 13 and 18, which
is a lava stone 4x12x12 ins. above ground, firmly set
marked ¼ on W. face, and witnessed by two bearing trees:A fir, 12 ins. in diam., N. 50° E., 23 lks. dist.,
marked ¼ S BT., andA fir, 8 ins. in diam., N. 55° W., 9 lks. dist.,
marked ¼ S BT.

Reconstruct this cor. monument as follows:

Alongside old cor. stone, set an iron post, 3 ft. long, 1
in. in diam., 25 ins. in the ground for ¼ sec. cor. of
secs. 13 and 18, marked on brass cap,

¼	
S13	S18
1925	

In addition to the two old bearing trees described above,
establish two new bearing trees:A fir, 8 ins. in diam., brs. S. 65° E., 15 lks.
dist., marked ¼ S 18 BT.A fir, 8 ins. in diam., brs. S. 80° W., 17 lks.
dist., marked ¼ S 13 BT.

Thence,

N. 2° 50' E., on true line, bet. secs. 13 and 18 (N. 2).

Over rolling land, thru. dense timber and undergrowth.

Descend 154 ft., over NW. slope.

29.20

Wash, 50 lks. wide, course SW.

Leave dense and enter scattering timber, brs. E. and W.

Ascend 89 ft., over S. slope to sec. cor.

31.00

Trail, brs. E. and W.

35.00

Enter dense timber, brs. NW. and SE.

39.80

Intersect the original cor. of secs. 7, 12, 13 and 18, which
is a lava stone, 8x14x20 ins. above ground, firmly set,
marked with 2 notches on N. face and 4 notches on S.
face, and witnessed by one of the original bearing
trees:An aspen, 6 ins. in diam., S. 24° E., 13 lks.
dist., marked T6N R31E S18 BT.

No trace of the old SW. bearing tree can be found.

Chains.

Reconstruct this cor. monument, as follows:

Alongside old cor. stone an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, marked on brass cap,

T6N	
R30E	R31E
S12	S 7

S13	S18
1925	

In addition to the old bearing described above, establish four new bearing trees:

A spruce, 10 ins. in diam., brs. N. 52° E., 91 lks.

dist., marked T6N R31E S7 BT.

A yellow pine, 18 ins. in diam., brs. S. 60° E., 99 lks.

dist., marked T6N R31E S18 BT.

A spruce, 18 ins. in diam., brs. S. 3° W., 24 lks.

dist., marked T6N R30E S13 BT.

A yellow pine, 30 ins. in diam., brs. N. 68° W., 124 lks.

dist., marked T6N R30E S12 BT.

Land, mountainous and rolling.

Soil, rocky, 4th rate.

Timber, spruce, yellow pine, fir and aspen.

Undergrowth, scrub oak and manzanita.

N. 4° 54' W., on true line, bet. secs. 7 and 12.

Over mountainous land, thru. dense timber and undergrowth.

Ascend 693 ft., over S. slope, to

40.87½

(Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground for reestablished ¼ sec. cor. of secs. 7 and 12, marked on brass cap,

¼	
S12	S 7

1925	

from which,

A fir, 18 ins. in diam., brs. S. 35° E., 34 lks.

dist., marked ¼ S 7 BT.

A spruce, 14 ins. in diam., brs. S. 22° W., 64 lks.

dist., marked ¼ S 12 BT.

No trace of original ¼ sec. cor. can be found in this vicinity.

Ascend 178 ft., over S. slope.

52.00

Spur, slopes SW.

Descend 725 ft., over NW. slope, to

81.75

(Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 1, 6, 7 and 12, marked on brass cap,

T6N	
R30E	R31E
S 1	S 6

S12	S 7
1925	

from which,

A spruce, 10 ins. in diam., brs. N. 52° E., 68

lks. dist., marked T6N R31E S6 BT.

A fir, 24 ins. in diam., brs. S. 53° E., 32 lks.

dist., marked T6N R31E S7 BT.

A spruce, 10 ins. in diam., brs. S. 11° W., 22 lks.

dist., marked T6N R30E S12 BT.

A fir, 20 ins. in diam., brs. N. 67° W., 35 lks.

dist., marked T6N R30E S1 BT.

No trace of the original cor. of secs. 1, 6, 7 and 12 can be found in this vicinity.

Land, mountainous.

Soil, rocky, 4th rate.

BOOK 3737

8 Resurvey of East bdy. of Township 6 North, Range 30 East.

Chains.

Timber, yellow pine, fir, spruce, aspen and juniper.
Undergrowth, scrub oak and manzanita.

N.4°54'W., on true line, bet. secs.1 and 6.
Over mountainous land, thru. dense timber and undergrowth.
Descend 49 ft., over NW.slope.
4.00 Wash, 10 lks. wide, course W.
Ascend 470 ft., over SW.slope to $\frac{1}{4}$ sec.cor.
5.30 Trail, to Ranger Station, brs.E.and W.
36.80 Wash, 30 lks. wide, course SW.
40.87 $\frac{1}{2}$ (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam.,
24 ins. in the ground, for reestablished $\frac{1}{4}$ sec.cor. of
secs.1 and 6, marked on brass cap,

$\frac{1}{4}$
S 1 | S 6
1925

from which,

A fir, 20 ins. in diam., brs. S.49°E., 101 lks.
dist., marked $\frac{1}{4}$ S 6 BT.

A fir, 40 ins. in diam., brs. N.12°W., 19 lks.
dist., marked $\frac{1}{4}$ S 1 BT.

No trace of the original $\frac{1}{4}$ sec.cor. can be found in this
vicinity.

48.40 Ascend 625 ft. over SW.slope to Tp. cor.
Telephone line, brs. NE; and SW.
81.75 Intersect the cor. of Ts. 6 and 7 N., Rs. 30 and 31 E., de-
scribed in Book "G" of this group.
Land, mountainous.
Soil, rocky, 4th rate.
Timber, yellow pine, fir, spruce and aspen.
Undergrowth, scrub oak and manzanita.

Chains.

The West bdy. of T. 6 N., R. 30 E. was surveyed by W.P. Fitzgerald, U.S.D.S. in 1883, establishing all sec. and $\frac{1}{4}$ sec. cors. thereon with a common reference to areas on both sides of the line. No retracement or resurvey of any part of this line is of record. The following notes describe a resurvey of the entire line, reestablishing missing cor. monuments at proportional intervals between existing cors., and reconstructing all existing cors. by setting an iron post alongside each one.

As all of the land on both sides of the line is accepted surveyed area, no change in alignment or in the reference of the cors. is permissible.

The cor. of Ts. 5 and 6 N., Rs. 29 and 30 E., reconstructed in original position by W.B. Kimmel, U.S.S. in 1916, is a sandstone 10x12x10 ins. above ground, firmly set, marked with 6 notches on each of E., W. N. and S. faces, and witnessed by a mound of stone S. of cor., and three bearing trees:

- A yellow pine, 36 ins. in diam., N. 40° E., 136 lks. dist., marked T6N R30E S31 BT.
- A yellow pine, 18 ins. in diam., S. 72° E., 451 lks. dist., marked T5N R30E S6 BT.
- A yellow pine, 24 ins. in diam., N. 1° W., 384 lks. dist., marked T6N R29E S36 BT.

Reconstruct this cor. monument again, as follows: Alongside old cor. stone, set an iron post, 3 ft. long, 3 ins. in diam., 24 ins. in the ground for cor. of Ts. 5 and 6 N., Rs. 29 and 30 E., marked on brass cap,

T6N	
R29E	R30E
S36	S31
S 1	S 6
T5N	
1925	

Thence, N. 0° 15' E., on true line, bet. secs. 31 and 36 (S. $\frac{1}{4}$).
Over rolling open land.

- 0.03 Ascend slightly over SW. slope.
 - 0.19 Fence cor. brs. W. 3 lks. dist., from which fences extend N. $9\frac{1}{2}$ ° E. and S. 86° W.
 - 0.19 Wire fence brs. N. $9\frac{1}{2}$ ° E. and S. $9\frac{1}{2}$ ° W.
 - 3.10 Wash, 10 lks. wide, 1 ft. deep, course SW.
 - 3.50 Ascend 199 ft., over SW. slope to $\frac{1}{4}$ sec. cor.
 - 40.00 Enter dense timber and undergrowth, brs. E. and W.
- The original $\frac{1}{4}$ sec. cor. of secs. 31 and 36, which is a sandstone, 8x8x12 ins. above ground, firmly set, marked $\frac{1}{4}$ on W. face, and witnessed by one bearing tree:
- A yellow pine, 20 ins. in diam., S. 22° W., 40 lks. dist., marked $\frac{1}{4}$ S BT.

Reconstruct this cor. monument as follows: Alongside old cor. stone, set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor. of secs. 31 and 36, marked on brass cap,

$\frac{1}{4}$	
S36	S31
1925	

In addition to the old bearing tree described above, establish two new bearing trees:

- A yellow pine, 14 ins. in diam., brs. S. 81° E., 52 lks. dist., marked $\frac{1}{4}$ S 31 BT.
- A yellow pine, 20 ins. in diam., brs. S. 32° W., 65 lks. dist., marked $\frac{1}{4}$ S 36 BT.

Thence,

BOOK 3737

10 Resurvey of West bdy. of Township 6 North, Range 30 East.

Chains.

N.0°16'W., on true line, bet. secs. 31 and 36 (N. $\frac{1}{2}$).
 Over rolling land, thru. dense timber and undergrowth.
 Ascend gradually over W. slope.
 5.00 Descend 67 ft. over gradual NW. slope.
 15.00 Shallow draw, course W. Enter mountainous land.
 Ascend 220 ft., over SW. slope, to
 39.80 Intersect the original cor. of secs. 25, 30, 31 and 36,
 which is a sandstone 18x24x24 ins. above ground, firmly
 set, marked with 1 notch on S. face, and 5 notches on
 N. face, and witnessed by two bearing trees:
 A yellow pine, 14 ins. in diam., S. 42° E., 21 lks.
 dist., marked T6N R30E S31 BT., and
 A yellow pine, 24 ins. in diam., S. 75° W., 45 lks.
 dist., marked T6N R29E S36 BT.
 Reconstruct this cor. monument, as follows: Alongside old
 cor. stone, set an iron post, 3 ft. long, 2 ins. in
 diam., 24 ins. in the ground for cor. of secs. 25, 30, 31
 and 36, marked on brass cap,

	T6N	
R29E		R30E
S25		S30
S36		S31
1925		

In addition to the old bearing trees described above,
 established four new bearing trees:
 A yellow pine, 14 ins. in diam., brs. S. 61° E., 48
 lks. dist., marked T6N R30E S31 BT.
 A yellow pine, 38 ins. in diam., brs. N. 83° E., 175
 lks. dist., marked T6N R30E S30 BT.
 A yellow pine, 26 ins. in diam., brs. S. 48° W., 76
 lks. dist., marked T6N R29E S36 BT.
 A yellow pine, 10 ins. in diam., brs. N. 39° W., 76
 lks. dist., marked T6N R29E S25 BT.

Land, rolling and mountainous.

Soil, rocky, 4th rate.

Timber, yellow pine, spruce, fir, aspen and juniper.

Undergrowth, sagebrush, scrub oak and manzanita.

N. 4° 57' W., on true line, bet. secs. 25 and 30.
 Over mountainous land, thru. dense timber and undergrowth.
 Ascend 67 ft., over SW. slope.
 6.20 Fence, brs. NW. and SE.
 7.10 Trail, brs. NW. and SE.
 13.00 Top of ridge, brs. N. and SE.
 Descend 29 ft., along top of ridge, to
 38.25 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam.,
 24 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor.
 of secs. 25 and 30, marked on brass cap,

	$\frac{1}{4}$	
S25		S30
1925		

from which,

A yellow pine, 18 ins. in diam., brs. S. 88° E., 62
 lks. dist., marked $\frac{1}{4}$ S 30 BT.

A fir, 10 ins. in diam., brs. S. 53° W., 28 lks.
 dist., marked $\frac{1}{4}$ S 25 BT.

No trace of the original $\frac{1}{4}$ sec. cor. can be found in this
 vicinity.

Descend 39 ft., along top of ridge.
 48.00 Ascend 149 ft. along top of ridge, to
 76.50 Intersect the original cor. of secs. 19, 24, 25 and 30, which
 is a sandstone 6x10x14 ins. above ground, firmly set,
 marked with 2 notches on S. face and 4 notches on N.

Chains

face, and witnessed by three bearing trees:

A dead yellow pine, 24 ins. in diam., N. 13° E.,
30 lks. dist., marked T6N R30E S19 BT.A yellow pine, 18 ins. in diam., S. 52° W., 17
lks. dist., marked T6N R29E S25 BT, andA yellow pine, 18 ins. in diam., N. 66° W., 32
lks. dist., marked T6N R29E S24 BT.

Reconstruct this cor. monument, as follows:

Alongside old cor. stone, set an iron post 3 ft. long, 2 ins.
in diam., 24 ins. in the ground for cor. of secs. 19, 24,
25 and 30, marked on brass cap,

T6N	
R29E	R30E
S24	S19
S25	S30
1925	

In addition to the three old bearing trees described
above, establish four new bearing trees:A yellow pine, 38 ins. in diam., brs. N. 83° E., 175
lks. dist., marked T6N R30E S19 BT.A yellow pine, 14 ins. in diam., brs. S. 61° E., 48
lks. dist., marked T6N R30E S30 BT.A yellow pine, 26 ins. in diam., brs. S. 48° W., 76
lks. dist., marked T6N R29E S25 BT.A yellow pine, 10 ins. in diam., brs. N. 39° W., 73
lks. dist., marked T6N R29E S24 BT.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, yellow pine, spruce, fir and aspen.

Undergrowth, scrub oak and manzanita.

23.00

31.00

39.81

N. 0° 6' W., on true line, bet. secs. 19 and 24 (S. $\frac{1}{4}$).

Over mountainous land, thru. dense timber and undergrowth.

Ascend 85 ft., over top of ridge, bearing N. and S.

Leave top of ridge, bearing N. 10° W. and S.

Descend 60 ft., over E. slope, to

Ascend 60 ft., over E. slope, to

Intersect the original $\frac{1}{4}$ sec. cor. of secs. 19 and 24, which
is a sandstone 6x8x12 ins. above ground, firmly set,
marked $\frac{1}{4}$ on W. face, and witnessed by two bearing trees:A yellow pine, 20 ins. in diam., N. 42° E., 7
lks. dist., marked $\frac{1}{4}$ S BT.A yellow pine, 30 ins. in diam., N. 44° W., 74
lks. dist., marked $\frac{1}{4}$ S BT.

Reconstruct this cor. monument, as follows:

Alongside old cor. stone, set an iron post, 3 ft. long, 1 in.
in diam., 24 ins. in the ground for $\frac{1}{4}$ sec. cor. of secs.
19 and 24, marked on brass cap,

$\frac{1}{4}$	
S24	S19
1925	

In addition to the old bearing trees described above,
establish two new bearing trees:A yellow pine, 24 ins. in diam., brs. S. 13° E., 78
lks. dist., marked $\frac{1}{4}$ S 19 BT.A yellow pine, 24 ins. in diam., brs. S. 52° W., 109
lks. dist., marked $\frac{1}{4}$ S 24 BT.

Thence,

N. 0° 26' E., on true line, bet. secs. 19 and 24 (N. $\frac{1}{2}$).

Over mountainous land, thru. dense timber and undergrowth.

Descend 617 ft., over NE. slope, to

38.77

Intersect the original cor. of secs. 13, 18, 19 and 24, which
is a yellow pine tree 26 ins. in diam., marked T6N S18
on NE. face and R30E S19 on SE. face.

BOOK 3737

12 Resurvey of West bdy. of Township 6 North, Range 30 East.

Chains.

The original marking on the NW. and SW. faces have been destroyed by fire. The original B.Ts. have also been destroyed.

Reconstruct this cor. monument as follows:

Alongside the tree cor., set an iron post, 3 ft. long., 2 ins. in diam., 24 ins. in the ground for cor. of secs. 13, 18, 19 and 24, marked on brass cap,

T6N
R29E | R30E
S13 | S18
S24 | S19
1925

from which,

A yellow pine, 20 ins. in diam., brs. N. 74° E., 120 lks. dist., marked T6N R30E S18 BT.

A spruce, 14 ins. in diam., brs. S. 5° E., 79 lks. dist. marked T6N R30E S19 BT.

A yellow pine, 24 ins. in diam., brs. S. 60° W., 54 lks. dist., marked T6N R29E S24 BT.

A yellow pine, 26 ins. in diam., brs. N. 51° W., 55 lks. dist., marked T6N R29E S13 BT.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, yellow pine, spruce, aspen and juniper.

Undergrowth, scrub oak and manzanita.

N. 0° 5' E., on true line, bet. secs. 13 and 18 (S. $\frac{1}{2}$).

Over mountainous land, thru. dense timber and undergrowth.

Descend 364 ft., over rolling NE. slope to $\frac{1}{4}$ sec. cor.

18.70

Trail, brs. N. 10° W. and S. 20° E.

39.40

Intersect the original $\frac{1}{4}$ sec. cor. of secs. 13 and 18, which is a sandstone, 6x10x10 ins. above ground, firmly set marked $\frac{1}{4}$ on W. face, and witnessed by a mound of stone, W. of cor., and the stump of a dead and fallen pine, 20 ins. in diam., S. 23° W., 30 lks. dist. This stump is blazed, but the marks have rotten away.

Reconstruct this cor. mon. as follows: Alongside old cor. stone, set an iron post 3 ft. long, 1 in. in diam., 24 ins. in the ground for $\frac{1}{4}$ sec. cor. of secs. 13 and 18, marked on brass cap,

$\frac{1}{4}$
S13 | S18
1925

In addition to the mound of stone and the remains of the old bearing tree described above, establish two new bearings trees:

A yellow pine, 14 ins. in diam., brs. N. 42° E., 48 lks. dist., marked $\frac{1}{4}$ S 18 BT.

A yellow pine, 8 ins. in diam., brs. S. 56° W., 36 lks. dist., marked $\frac{1}{4}$ S 13 BT.

Thence,

N. 0° 31' E., on true line, bet. secs. 13 and 18 (N. $\frac{1}{2}$).

Over rolling land, thru. dense timber and undergrowth.

Descend 205 ft., over NE. slope.

33.10

Fence, brs. E. and W.

35.40

Creek, with stream of water, 6 lks. wide, 6 ins. deep, course NE. Enter nearly level, open, cultivated land, brs. E. and W.

40.72

Intersect the point of original location of the cor. of secs. 7, 12, 13 and 18, determined by measurement, as per record from the original bearing tree, which is a pine stump, 60 ins. in diam., 3 ft. high, N. 12 $\frac{1}{2}$ ° W., 114 lks. dist., marked T6N R29E S12 BT.

Reconstruct this cor. mon. as follows: At original cor. point Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 7, 12, 13 and 18, marked

Chains.

on brass cap,

T6N	
R29E	R30E
S12	S 7
S13	S18
1925	

In addition to the remains of the old bearing tree described above, establish four new bearing trees:

- A yellow pine, 20 ins. in diam., brs.N.43°E., 244 lks.dist., marked T6N R30 E S7 BT.
- A yellow pine, 20 ins. in diam., brs.S.18°E., 630 lks.dist., marked T6N R30E S18 BT.
- A yellow pine, 20 ins. in diam., brs.S.40°W., 594 lks.dist., marked T6N R29E S13 BT.
- A yellow pine, 16 ins. in diam., brs.N.3°W., 221 lks.dist., marked T6N R29E S12 BT.

Land, mountainous, rolling and nearly level.
 Soil, rocky, 4th rate except in N. 6 chs., where the soil is sandy, 2nd rate.
 Timber, yellow pine, spruce, fir, aspen, oak and juniper.
 Undergrowth, scrub oak, manzanita and berry brush.

- N.0°51'E., on true line, bet. secs.7 and 12 (S.1/2).
- Over nearly level open cultivated land.
- 3.00 Fence, brs.NE. and SW. Leave cultivated field. Enter rolling land, dense timber and undergrowth.
- Ascend 75 ft., over SE.slope.
- 8.00 Spur, slopes NE.
- Descend gradually over N.slope.
- 8.70 Log fence, brs.NE. and SW.
- 9.10 Road, brs. NE. and SW.
- 12.40 Wash, 15 lks. wide, 4 ft. deep, course NE.
- Ascend gradually over SE. slope.
- 18.95 Ascend gradually over E. slope, to
- 39.10 Intersect the original 1/4 sec.cor. of secs.7 and 12, which is a mound of earth containing remains of old wooden post broken off at surface of the mound, and witnessed by one bearing tree:

A yellow pine, 20 ins. in diam., S.7 1/2°W., 62 lks.dist., marked 1/4 S BT.

Reconstruct this cor.monument, as follows:
 Alongside the remains of the old wooden post, set an iron post, 3 ft.long, 1 in. in diam., 24 ins. in the mound for 1/4 sec.cor. of secs. 7 and 12, marked on brass cap,

1/4	
S12	S 7
1925	

In addition to the old bearing tree described above, establish two new bearing trees:

- A yellow pine, 20 ins. in diam., brs.N.89°E., 56 lks.dist., marked 1/4 S 7 BT.
- A yellow pine, 10 ins. in diam., brs.N.33°W., 26 lks.dist., marked 1/4 S 12 BT.

- Thence,
- N.0°4'E., on true line, bet. secs.7 and 12 (N.1/2).
- 15.70 Over rolling land, thru. dense timber and undergrowth.
- Descend gradually over E.slope, to

BOOK 3737

14 Resurvey of West bdy. of Township 6 North, Range 30 East.

Chains.


25.30 Wash, 15 lks. wide, course E. Thence over nearly level land.
 39.75 Intersect the original cor. of secs. 1, 6, 7 and 12, which is a decayed wooden post, 3 ins. square, projecting 12 ins. above amount of earth and stone in which it is set, and witnessed by two bearing trees:

A yellow pine, 18 ins. in diam., S. 89° E., 68 lks. dist., marked T6N R30E S7 BT., and

A yellow pine, 24 ins. in diam., S. 23° W., 55 lks. dist., marked T6N R29E S12 BT.

Reconstruct this cor. monument, as follows:

Alongside old wooden post, set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the mound, for cor. of secs. 1, 6, 7 and 12, marked on brass cap,



1925

In addition to the two old bearing trees described above establish four new bearing trees:

A yellow pine, 10 ins. in diam., brs. N. 49° E., 87 lks. dist., marked T6N R30E S6 BT.

A yellow pine, 18 ins. in diam., brs. S. 82° E., 100 lks. dist., marked T6N R30E S7 BT.

A yellow pine, 18 ins. in diam., brs. S. 74° W., 65 lks. dist., marked T6N R29E S12 BT.

A yellow pine, 18 ins. in diam., brs. N. 67° W., 74 lks. dist., marked T6N R29E S1 BT.

Land, nearly level and rolling.

Soil, rocky, 4th rate, except in S. 5 chs. and N. 10 chs., where it is sandy, 2nd rate.

Timber, yellow pine, juniper and oak.

Undergrowth, sagebrush, and scrub oak.

N. 0° 19' E., on a true line, bet. secs. 1 and 6.

Over nearly level land, thru. dense timber and scattering undergrowth.


16.15 Fence, brs. E. and W. Fence cor. brs. W. about 100 lks. dist., from which fences extend E. and N.

28.95 Same fence, brs. N. 20° E. and S. 20° W.

36.00 Leave timber and undergrowth, brs. NE. and SW. Thence over cultivated land.

40.00 Leave cultivated land, brs. E. and W. Enter very scattering timber and scattering undergrowth.

40.19 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 1 and 6, marked on brass cap,



1925

from which,

A yellow pine, 12 ins. in diam., brs. N. 82° E., 254 lks. dist., marked $\frac{1}{4}$ S 6 BT.

A yellow pine, 16 ins. in diam., brs. S. 78° W., 454 lks. dist., marked $\frac{1}{4}$ S 1 BT.

No trace of the original $\frac{1}{4}$ sec. cor. can be found in this vicinity.

40.25 Field road brs. E. and W.

Chains.

- 40.40 Fence cor. brs. W. 2 lks. dist., from which fences extend E., W. and N. Thence over cultivated land along E. side of fence.
- 71.00 Fence brs. N. 1° E. and S. 1° W.
Thence in lane, bearing nearly N. and S.
- 73.05 Creek, with stream of water, 6 lks. wide, 6 ins. deep, course SE. Enter gently rolling land.
- 80.06 Ascend gradually over S. slope, to
Intersect the cor. of Ts. 6 and 7 N., Rs. 29 and 30 E., described in Book "G" of this group.
Land, nearly level and gently rolling.
Soil, sandy, 1st and 2nd rate.
Timber, yellow pine, oak and juniper.
Undergrowth, sagebrush and second growth of timber.
-

Boundaries of Township 6 North, Range 30 East.
 Latitudes, departures, and closing errors.

Line designated.	True bearing.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
South boundary (W.B.Kimmel, 1916)	S.89°41'W.	86.22		.48		86.22
	S.88°45'W.	38.63		.84		38.62
	S.89°11'W.	39.26		.56		39.26
	N.85°14'W.	79.64	6.62			79.36
	S.89°29'W.	39.64		.36		39.64
	N.89°42'W.	117.84	.62			117.84
	N.89°11'W.	80.46	1.15			80.45
West boundary,	N.0°15'E.	40.00	40.00		.17	
	N.0°16'W.	39.80	39.80			.19
	N.4°57'W.	76.50	76.21			6.60
	N.0°6'W.	39.81	39.81			.07
	N.0°26'E.	38.77	38.77		.29	
	N.0°5'E.	39.40	39.40		.06	
	N.0°31'E.	40.72	40.72		.37	
	N.0°51'E.	39.10	39.10		.58	
	N.0°4'E.	39.75	39.75		.05	
N.0°19'E.	80.06	80.06		.44		
North boundary	S.88°34'E.	87.70		2.19	87.67	
	S.89°57'E.	77.90		.07	77.90	
	S.89°35'E.	39.10		.28	39.10	
	S.89°06'E.	39.20		.62	39.20	
	S.87°02'E.	78.50		4.06	78.39	
	N.86°06'E.	39.26	2.67		39.17	
	N.82°42'E.	40.16	5.11		39.83	
	S.88°35'E.	76.98		1.90	76.96	
East boundary,	S.4°54'E.	163.60		162.90	13.97	
	S.2°50'W.	39.80		39.75		1.97
	S.0°30'W.	40.10		40.10		.35
	S.0°54'W.	79.42		79.41		1.25
	S.1°45'W.	40.12		40.10		1.22
	S.1°10'W.	39.86		39.85		.81
	S.0°2'W.	38.38		38.38		.02
	S.0°31'W.	38.83		38.83		.35
Convergency,					.49	
<u>Totals.</u>			489.79	490.68	494.64	494.22
<u>Error in latitude,</u>				489.79	494.22	
<u>Error in departure,</u>				0.89		0.42

Resurvey of Subdivision lines of Township 6 North, Range 30 East. 17

Chains.

The subdivision lines of T.6 N., R.30 E. were surveyed by W.R.Fitzgerald, U.S.D.S. in 1883, subdividing the entire township.

The line bet. secs.15 and 16 were resurveyed in 1914 and 1916, by U.S.Forest Service surveyors in connection with the survey in sec.15 of H.E.S. No.239.

In 1920, the N., S, and E. boundaries of sec.15 were retraced by U.S.Forest Service Surveyor, who reported all original cor. monuments on said sec.lines missing.

No other retracement or resurvey of subdivision lines in this township is of record.


The following notes describe a resurvey of all of the subdivision lines of T.6 N., R.30 E., reconstructing all existing cors. and reestablishing all missing cors. by single or double proportion between existing cors.:

The corner of secs.1,2,35 and 36, on the S. bdy.of the Tp., reestablished in 1916, is an iron post, 2 ins. in diam. projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by four properly marked bearing trees, one each NE., SE., SW. and NW.of cor.

Thence,
 N.0°10'W., on true line, bet. secs.35 and 36 (S.2).
 Over mountainous land, thru. dense timber and undergrowth.
 Ascend gradually over E.slope, to
 18.00 Wash, 20 lks.wide, course SE.
 Ascend 102 ft., over SW. slope, to
 31.80 Wash, 20 lks.wide, 2 ft.deep, course SW.
 Ascend 175 ft., over SW.slope, to
 39.52 Intersect the original $\frac{1}{4}$ sec.cor. of secs.35 and 36, which is a sandstone 8x20x36 ins., marked $\frac{1}{4}$ on W.face, firmly set in a mound of stone and witnessed by two bearing trees:

- A yellow pine, 40 ins. in diam., brs.S.72°E., 26 lks.dist., marked $\frac{1}{4}$ S BT., and
- A yellow pine, 12 ins.in diam., brs.N.31°W., 12 lks.dist., marked $\frac{1}{4}$ S BT.

Reconstruct this cor.monument, as follows:
 Remove the mound of stone, and in center of its position reset old cor.stone 14 ins. in the ground, and alongside same set an iron post, 3 ft.long, 1 in. in diam., 14 ins. in the ground to bed rock, deposit a stone marked with a cross (x) at base of post, and raise a mound of stone around post, for $\frac{1}{4}$ sec.cor. of secs.35 and 36, marked on brass cap,



In addition to the old bearing trees described above, establish two new bearing trees.

- A yellow pine, 12 ins. in diam., brs.N.47°E., 35 lks.dist., marked $\frac{1}{4}$ S 36 BT.
- A yellow pine, 14 ins. in diam., brs.N.60°W., 84 lks.dist., marked $\frac{1}{4}$ S 35 BT.

Thence,
 N.0°49'E., on true line, bet. secs.35 and 36 (N. $\frac{1}{4}$).
 Over mountainous land, thru. dense timber and undergrowth.
 Descend 25 ft., over NW. slope.
 2.00 Wash, 20 lks.wide, course SW.
 Ascend 380 ft., over SE.slope.
 25.00 Ridge, brs.E.and W.
 Descend 309 ft., over N. slope, to
 38.49 Intersect the original cor.of secs. 25,26, 35 and 36, which is a sandstone 8x10x8 ins. above ground, marked 1 notch on each of S. and E.faces, and witnessed by two

Chains.

bearing trees:

A fir, 30 ins. in diam., S. 38° W., 30 lks. dist.,
 markings on same destroyed by fire.

A dead fallen pine, 40 ins. in diam., N. 25° W.,
 80 lks. dist., marked T6N R30E S26 BT.

Reconstruct this cor. monument as follows:

Alongside old cor. stone, set an iron post 3 ft. long, 2
 ins. in diam., 24 ins. in the ground for cor. of secs.
 25, 26, 35 and 36, marked on brass cap,

T6N	R30E
S26	S25
S35	S36
1925	

In addition to the two old bearing trees described above,
 establish four new bearing trees:

A spruce, 18 ins. in diam., brs. N. 25° W., 122 lks.
 dist., marked T6N R30E S25 BT.

A spruce, 6 ins. in diam., brs. S. 12½° E., 10 lks.
 dist., marked T6N R30E S36 BT.

A spruce, 18 ins. in diam., brs. S. 83° W., 56 lks.
 dist., marked T6N R30E S35 BT.

A yellow pine, 20 ins. in diam., brs. N. 38° W.,
 88 lks. dist., marked T6N R30E S26 BT.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, yellow pine, spruce, fir, aspen and juniper.

Undergrowth, scrub oak, manzanita and thorn brush.

From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the
 Tp., hereinbefore described,

N. 89° 35' W., on true line, bet. secs. 25 and 36.

Over mountainous land, thru. dense timber and undergrowth.

Descend 281 ft., over SW. slope.

13.75 Wash, 20 lks. wide, course SW.

Ascend 94 ft., over SE. slope.

36.00 Ridge, brs. NE. and SW.

Descend 67 ft., over NW. slope, to

42.93 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam.,
 20 ins. in the ground to bed rock, deposit a stone
 marked with a cross (x) at base of post, and raise a
 mound of stone around post, for reestablished ¼ sec.
 cor. of secs. 25 and 36, marked on brass cap,

¼ S 25
S 36
1925

from which,

A yellow pine, 20 ins. in diam., brs. N. 22° E., 6
 lks. dist., marked ¼ S 25 BT.

A yellow pine, 24 ins. in diam., brs. S. 63° E., 12
 lks. dist., marked ¼ S 36 BT.

No trace of the original ¼ sec. cor. can be found in this
 vicinity.

Descend 475 ft., over NW. and N. slopes to sec. cor.

82.50 Wash, 100 lks. wide, course NW.

85.86 Intersect the cor. of secs. 25, 26, 35 and 36.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, yellow pine, fir, spruce, aspen and juniper.

Undergrowth, scrub oak, manzanita and thorn brush.

N. 0° 2' E., on true line, bet. secs. 25 and 26 (S. ½).

Over mountainous land, thru. dense timber and undergrowth.

Descend 25 ft., over N. slope.


4.60 Wash, 60 lks. wide, course N. 80° W.

Resurvey of Subdivision lines of Township 6 North, Range 30 East. 19

Chains.

39.83 Ascend 227 ft., over SW.slope, to
 Intersect the original $\frac{1}{4}$ sec.cor. of secs.25 and 26, which
 is a sandstone 9x10x16 ins., marked $\frac{1}{4}$ on W.face, set in
 a mound of stone, and witnessed by one bearing tree:
 A yellow pine, 18 ins.in diam., S.48°E., 30
 lks.dist., marked $\frac{1}{4}$ S BT.

Reconstruct this cor.monument, as follows:
 Remove the mound of stone, and in center of its position,
 reset old cor.stone, 10 ins.in the ground, and alongside
 same set an iron post, 3 ft.long, 1 in.in diam., 20 ins.
 in the ground to bed rock, and raise a mound of stone
 around post, for $\frac{1}{4}$ sec.cor. of secs.25 and 26, marked
 on brass cap,




In addition to the old bearing tree described above, estab-
 lish two new bearing trees:
 A yellow pine, 20 ins.in diam., brs.S.28°E., 61
 lks.dist., marked $\frac{1}{4}$ S 25 BT.
 A yellow pine, 18 ins.in diam., brs.N.81°W., 38
 lks.dist., marked $\frac{1}{4}$ S 26 BT.

22.60 Thence,
 N.0°18'E., on true line, bet. secs.25 and 26 (N. $\frac{1}{4}$).
 Over mountainous land, thru.dense timber and undergrowth.
 Ascend 79 ft., over SW.slope.
 Spur, slopes W.

39.84 Descend 212 ft., over NW.slope, to
 Intersect the original cor.of secs. 23, 24, 25 and 26, which
 is a sandstone 4x14x8 ins. above ground, marked with
 2 notches on S.face and 1 notch on E.face, and witnessed
 by two bearing trees:
 A fir, 30 ins. in diam., brs.S.60°E., 51 lks.
 dist., marked T6N R30E S25 BT.
 A fir, 30 ins. in diam., brs.N.30°W., 38 lks.
 dist., Marks obliterated by fire.

Reconstruct this cor. monument as follows:
 Alongside old cor. stone set an iron post, 3 ft.long, 2
 ins.in diam., 24 ins. in the ground for cor.of secs.23,
 24, 25 and 26, marked on brass cap,



In addition to the old bearing trees described above, es-
 tablish four new bearing trees:
 An aspen, 6 ins. in diam., brs.N.73°E., 16 lks.
 dist., marked T6N R30E S24 BT.
 A fir, 30 ins.in diam., brs.S.61°E., 52 lks.
 dist., marked T6N R30E S25 BT.
 A spruce, 8 ins.in diam., brs.S.36°W., 71 lks.
 dist., marked T6N R30E S26 BT.
 A spruce, 10 ins.in diam., brs.N.84°W., 61 lks.
 dist., marked T6N R30E S23 BT.

Land, mountainous.
 Soil, rocky, 3rd rate.
 Timber, yellow pine, fir, spruce, aspen and oak.
 Undergrowth, scrub oak, manzanita and thorn brush.

9.50 From the cor.of secs.19, 24, 25 and 30, on the E. bdy.of the
 Tp., hereinbefore described,
 N.89°45'W., on true line, bet. secs.24 and 25.
 Over mountainous land, thru. dense timber and undergrowth.
 Descend 58 ft., over N.slope, to
 Spur, slopes NW.
 Descend 456 ft., over W.slope, to.

BOOK 3737

20 Resurvey of Subdivision lines of Township 6 North, Range 30 East.

Chains.

- 43.75 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bed rock, supported in a mound of stone, for reestablished $\frac{1}{4}$ sec. cor. of secs. 24 and 25, marked on brass cap,
- $\frac{1}{4}$ S 24
S 25
1925
- from which,
A spruce, 8 ins. in diam., brs. S. 77° W., 36 lks.
dist., marked $\frac{1}{4}$ S 25 BT.
A spruce, 10 ins. in diam., brs. N. 23° W., 38 lks.
dist., marked $\frac{1}{4}$ S 24 BT.
- No trace of original $\frac{1}{4}$ sec. cor. can be found in the vicinity.
Descend 806 ft., over SW. slope, covered with malpais boulders
- 86.50 Wash, 30 lks. wide, course NW.
Descend slightly over NW. slope, to
- 87.50 Intersect the cor. of secs. 23, 24, 25 and 26.
Land, mountainous.
Soil, rocky, 4th rate.
Timber, yellow pine, spruce, fir and aspen.
Undergrowth, scrub oak, manzanita and thorn brush.
-
- N. 4° 26' E., on true line, bet. secs. 23 and 24.
Over mountainous land, thru. dense timber and undergrowth.
Descend slightly over NW. slope.
- 0.40 Wash, 40 lks. wide, course N. 80° W.
Ascend 263 ft., over SW. slope.
- 26.30 Spur, slopes W.
Descend 253 ft., over N. slope, to
- 40.17 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 23 and 24, marked on brass cap,
- $\frac{1}{4}$
S 23 | S 24
1925
- from which,
A spruce, 12 ins. in diam., brs. N. 78° E., 27 lks. dist., marked $\frac{1}{4}$ S 24 BT.
A fir, 14 ins. in diam., brs. S. 84° W., 48 lks. dist., marked $\frac{1}{4}$ S 23 BT.
- No trace of the original $\frac{1}{4}$ sec. cor. can be found in this vicinity.
Descend slightly over N. slope.
- 41.00 Wash, 40 lks. wide, course SW. Asc. 854 ft., over S. slope, to
- 75.00 Rim, brs. NE. and SW. Thence over nearly level top of mountain, bears E. and W., thru. dense timber and wind-falls.
- 80.34 (Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for reestablished cor. of secs. 13, 14, 23 and 24, marked on brass cap,
- T6N R30E
S14 | S13
S23 | S24
1925
- from which,
A spruce, 10 ins. in diam., brs. N. 35° E., 26 lks.
dist., marked T6N R30E S13 BT.
A spruce, 10 ins. in diam., brs. S. 43° E., 23 lks.
dist., marked T6N R30E S24 BT.
A yellow pine, 10 ins. in diam., brs. S. 42° W., 50 lks.
dist., marked T6N R30E S23 BT.

Resurvey of Subdivision lines of Township 6 North, Range 30 East 21

Chains.

	<p>A spruce, 14 ins. in diam., brs. N. 44° W., 45 lks. dist., marked T6N R30E S14 BT.</p> <p>No trace of original sec. cor. can be found in this vicinity.</p> <p>Land, mountainous and nearly level.</p> <p>Soil, rocky, 4th rate.</p> <p>Timber, yellow pine, spruce, fir, aspen, oak and juniper.</p> <p>Undergrowth, scrub oak, manzanita and thorn brush.</p>
6.00	Enter dense timber, brs. N. and S.
12.00	Top of ridge, brs. W. and S. 10° E. Thence along top of ridge.
41.14½	<p>Descend 101 ft. to</p> <p>(Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bed rock, supported by a mound of stone for reestablished ¼ sec. cor. of secs. 13 and 24, marked on brass cap,</p> <p style="text-align: center;">¼ S 13 S 24 1925</p> <p>from which,</p> <p>A spruce, 10 ins. in diam., brs. S. 49° W., 91 lks. dist., marked ¼ S 24 BT.</p> <p>A spruce, 10 ins. in diam., brs. N. 2° W., 86 lks. dist., marked ¼ S 13 BT.</p> <p>No trace of original ¼ sec. cor. can be found in this vicinity.</p> <p>Thence over nearly level top of ridge, bearing E. and W. thru. dense timber and windfalls.</p>
82.29	<p>Descend gradually to</p> <p>Intersect the cor. of secs. 13, 14, 23 and 24.</p> <p>Land, mountainous and nearly level.</p> <p>Soil, rocky, 4th rate.</p> <p>Timber, spruce, fir, yellow pine and aspen.</p> <p>Undergrowth, scrub oak, manzanita and thorn brush.</p>
3.00	<p>N. 5° 11' E., on true line, bet. secs. 13 and 14.</p> <p>Over nearly level land, thru. dense timber and windfalls and undergrowth. Across top of ridge.</p> <p>Top of ridge, becomes rolling.</p>
26.10	<p>Descend 58 ft., to</p> <p>Rim, brs. E. and W. Leave top of ridge.</p>
40.21	<p>Descend 263 ft., over steep N. slope, to</p> <p>(Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for reestablished ¼ sec. cor. of secs. 13 and 14, marked on brass cap,</p> <p style="text-align: center;">¼ S14 S13 1925</p> <p>from which,</p> <p>A spruce, 12 ins. in diam., brs. S. 36° E., 22 lks. dist., marked ¼ S 13 BT.</p> <p>A fir, 16 ins. in diam., brs. N. 49° W., 23 lks. dist., marked ¼ S 14 BT.</p> <p>No trace of original ¼ sec. cor. can be found in this vicinity.</p>
79.00	<p>Descend 904 ft. over steep N. slope to sec. cor.</p> <p>Leave dense, and enter scattering timber, brs. NE. and SW.</p>

Chains.

80.42 Intersect the original cor. of secs. 11, 12, 13, and 14, which is a lava stone 20x14x10 ins., marked with 4 notches on S. face, and 1 notch on N. face, firmly set in a mound of stone, and witnessed by two bearing trees:
 A yellow pine 30 ins. in diam., brs. N. 5° E., 37 lks. dist., marked T6N R30E S12 BT.
 A fir, 12 ins. in diam., brs. S. 12° W., 34 lks. dist., marked T6N R30E S14 BT.

Reconstruct this cor. monument as follows:
 Remove the mound of stone, and in center of its position, reset old cor. stone, 14 ins. in the ground, and alongside same, set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 11, 12, 13 and 14, marked on brass cap,

T6N R30E	
S11	S12
S14	S13
1925	

In addition to the old bearing trees described above, establish four new bearing trees:

- A spruce, 12 ins. in diam., brs. N. 21 $\frac{1}{2}$ ° E., 75 lks. dist., marked T6N R30E S12 BT.
- A yellow pine, 40 ins. in diam., brs. S. 87 $\frac{1}{2}$ ° E., 100 lks. dist., marked T6N R30E S13 BT.
- A yellow pine, 30 ins. in diam., brs. S. 88 $\frac{1}{2}$ ° W., 83 lks. dist., marked T6N R30E S14 BT.
- A yellow pine, 40 ins. in diam., brs. N. 73° W., 99 lks. dist., marked T6N R30E S11 BT.

Land, nearly level, rolling and mountainous.

Soil, rocky, 4th rate.

Timber, yellow pine, fir, spruce, aspen and oak.

Undergrowth, scrub oak, manzanita and thorn brush.

From the cor. of secs. 7, 12, 13 and 18 on the E. bdy. of the Tp., hereinbefore described,
 N. 88° 43' W., on true line, bet. secs. 12 and 13 (E. $\frac{1}{2}$).
 Over mountainous land, thru. dense timber and undergrowth.
 Ascend 107 ft. over SE. slope.

5.50 Spur, slopes SW. Thence over W. slope broken by malpais rock.

Descend 321 ft., to

37.75 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 12 and 13, which is a lava stone, 5x10x20 ins. marked $\frac{1}{4}$ on N. face, and firmly set in a mound of stone, No accessories.

Reconstruct this cor. monument, as follows:

Remove the mound of stone, and in center of its position, reset old cor. stone, 14 ins. in the ground, and alongside same set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 12 and 13, marked on brass cap,

$\frac{1}{4}$ S 12
S 13
1925

from which,

- A yellow pine, 12 ins. in diam., brs. N. 62° E., 47 lks. dist., marked $\frac{1}{4}$ S 12 BT.
- An aspen, 10 ins. in diam., brs. S. 66 $\frac{1}{2}$ ° E., 34 lks. dist., marked $\frac{1}{4}$ S 13 BT.

Thence,

S. 89° 57' W., on true line, bet. secs. 12 and 13 (W. $\frac{1}{2}$).

Over mountainous land, thru. dense timber and undergrowth.

Descend 205 ft., over SW. slope.

7.55 Wash, 30 lks. wide, course NW.

Ascend 69 ft., over NE. slope.

11.00 Point of spur, sloping NW.

Descend 61 ft., over W. slope.

14.90 Same wash, course SW. Asc. 63 ft., over SE. slope.

Resurvey of Subdivision lines of Township 6 North, Range 30 East. 23

Chains

20.00 Point of spur, slopes SW.
 Descend 95 ft., over SW. slope, to
 28.45 Same wash, with stream of water, 10 lks. wide, 6 ins. deep,
 course NW. Desc. 200 ft., over N. slope, to
 39.93 Intersect the cor. of secs. 11, 12, 13 and 14.
 Land, mountainous.
 Soil, rocky, 4th rate.
 Timber yellow pine, spruce, fir and aspen.
 Undergrowth, scrub oak, thorn brush and manzanita.

 N. 1° 55' W., on true line, bet. secs. 11 and 12.
 Over mountainous land, thru. dense timber and undergrowth.
 Descend 71 ft., over N. slope.
 8.80 Wash, with stream of water 3 lks. wide, 6 ins. deep, course
 S. 70° W. Asc. 213 ft., over S. slope.
 20.00 Narrow spur, slopes W. Desc. 142 ft., over N. slope.
 22.00 Wash, 10 lks. wide, course N. 70° W. Asc. 34 ft., over S. slope.
 26.00 Spur, slopes W.
 Descend 14 ft. over NW. slope.
 28.00 Bottom of ravine, course SW.
 Ascend 107 ft., over SE. slope, to
 35.00 Rim of bench, brs. NE. and SW. Thence over rolling land,
 thru. scattering timber on bench.
 40.10 Trail, brs. E. and W.
 42.27½ (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam.,
 24 ins. in the ground for reestablished ¼ sec. cor. of
 secs. 11 and 12, marked on brass cap,

¼
 S11 | S12
 1925

from which,
 A yellow pine, 10 ins. in diam., brs. N. 73½° E., 45
 lks. dist., marked ¼ S 12 BT.
 A yellow pine, 12 ins. in diam., brs. S. 28° W., 94
 lks. dist., marked ¼ S 11 BT.

No trace of original ¼ sec. cor. can be found in this vi-
 cinity. Continue over rolling land on bench.
 54.50 Rim of bench, brs. E. and W. Leave bench, Enter mountainous
 land.
 Descend 111 ft., over N. slope.
 58.90 Center of shallow draw, 2 chs. wide, course NW. Enter
 rolling land.
 Ascend 82 ft., over SW. slope, to
 84.55 (Proportional dist.) Set an iron post, 3 ft. long, 2 ins.
 in diam., 24 ins. in the ground, for reestablished
 cor. of secs. 1, 2, 11 and 12, marked on brass cap,

T6N R30E
 S 2 | S 1
 S11 | S12
 1925

from which,
 A yellow pine, 18 ins. in diam., brs. N. 50° E., 37
 lks. dist., marked T6N R30E S1 BT.
 A yellow pine, 14 ins. in diam., brs. S. 40° E., 41
 lks. dist., marked T6N R30E S12 BT.
 A yellow pine, 12 ins. in diam., brs. S. 57° W., 132
 lks. dist., marked T6N R30E S11 BT.
 A yellow pine, 24 ins. in diam., brs. N. 34° W., 21
 lks. dist., marked T6N R30E S2 BT.

No trace of the original sec. cor. can be found in this
 vicinity.
 Land, mountainous and rolling.
 Soil, rocky, 4th rate.
 Timber, yellow pine, spruce, fir and aspen.
 Undergrowth, scrub oak, thorn brush and manzanita.

24 Resurvey of Subdivision lines of Township 6 North, Range 30 E.

Chains.

From the reestablished cor. of secs. 1, 6, 7 and 12, on the East bdy. of the Tp., hereinbefore described, N. $86^{\circ}44'W.$, on true line, bet. secs. 1 and 12. Over mountainous land, thru. dense timber and undergrowth. Descend 350 ft. over NW. slope, to

36.95 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 1 and 12, marked on brass cap,

$$\begin{array}{c} \frac{1}{4} S 1 \\ S 12 \\ 1925 \end{array}$$

from which,

An aspen, 8 ins. in diam., brs. S. $31\frac{1}{2}^{\circ}E.$, 31 lks. dist., marked $\frac{1}{4}S 12$ BT.

A yellow pine, 30 ins. in diam., brs. N. $45^{\circ}W.$, 82 lks. dist., marked $\frac{1}{4}S 1$ BT.

No trace of the original $\frac{1}{4}$ sec. cor. can be found in this vicinity.

50.15 Descend 148 ft., over NW. slope. Wash, 10 lks. wide, with stream of water, 4 lks. wide, 6 ins. deep, course SW.

54.20 Descend gradually over S. slope, to Same wash, course N. $80^{\circ}W.$

57.50 Ascend 36 ft., over NE. slope. Point of spur, slopes N.

64.00 Descend 18 ft. over NW. slope. Head of wash, course NW.

66.50 Ascend 18 ft., over NE. slope. Spur, slopes NW. Enter rolling land.

73.90 Descend 85 ft., over SW. slope, to Intersect the cor. of secs. 1, 2, 11 and 12. Land, mountainous and rolling.

Soil, rocky, 4th rate.

Timber, yellow pine, fir, spruce and aspen.

Undergrowth, scrub oak, thorn brush and manzanita.

From the cor. of secs. 1 and 2, on the N. bdy. of the Tp., described in Book "G" of this group, S. $0^{\circ}47'W.$, on true line, bet. secs. 1 and 2 (N.E.). Over mountainous land, thru. dense timber and undergrowth. Descend 138 ft., over S. slope.

16.35 Wash, 20 lks. wide, course SW. Asc. 114 ft. over NW. slope.

29.75 Spur, slopes W. Enter rolling land.

37.03 Descend gradually over SW. slope, to Intersect the original $\frac{1}{4}$ sec. cor. of secs. 1 and 2, which is a wooden stake, 2 ins. square, marked $\frac{1}{4}$ on W. face, set in a mound of earth, from which it projects 10 ins. and witnessed by traces of two pits, one each N. and S. of cor. No trace of the original bearing tree can be found.

Reconstruct this cor. monument, as follows:

Alongside old wooden stake set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the mound for $\frac{1}{4}$ sec. cor. of secs. 1 and 2, marked on brass cap,

$$\begin{array}{c} \frac{1}{4} \\ S 2 | S 1 \\ 1925 \end{array}$$

from which,

A yellow pine, 12 ins. in diam., brs. N. $52^{\circ}E.$, 57 lks. dist., marked $\frac{1}{4}S 1$ BT.

A yellow pine, 20 ins. in diam., brs. N. $42^{\circ}W.$, 36 lks. dist., marked $\frac{1}{4}S 2$ BT.

Thence,

Resurvey of Subdivision lines of Township 6 North, Range 30 East. 25

Chains

S.14°25'E., on true line, bet. secs.1 and 2 (S.2).
Over rolling land, thru. dense timber and undergrowth.
Descend 69 ft., over SW. slope.
5.70 Wash, 20 lks. wide, course SW.
Ascend 40 ft., over N. slope.
11.00 Spur, slopes W.
Descend 23 ft., over S. slope.
18.40 Wash, 20 lks. wide, stream of water, 4 lks. wide, 4 ins.
deep, course W. A dam of earth and stone, brs. W. about
4 chs. dist.
Ascend 69 ft., over N. slope.
30.00 Ridge, brs. E. and W.
34.30 Telephone line, brs. E. and W.
34.60 Bend in Escudilla trail, from E. to SW.
34.80 Descend 46 ft., over S. slope.
39.35 Wash, 30 lks. wide, stream of water, 4 lks. wide, 5 ins.
deep, course S.80°W.
Ascend 20 ft., over N. slope.
43.00 Point of low spur, slopes NW.
Descend slightly over SW. slope, to
43.62 Intersect the cor. of secs. 1, 2, 11 and 12.
Land, mountainous and rolling.
Soil, rocky, 4th rate.
Timber, yellow pine, fir, spruce and aspen.
Undergrowth, sage brush, scrub oak, manzanita and thorn
brush.

The cor. of secs. 2, 3, 34 and 35 on the S. bdy. of the Tp.,
reconstructed in original position in 1916 is an iron
post 2 ins. in diam., projecting 8 ins. above ground,
firmly set, properly marked on brass cap, and witnessed
by four bearing trees, one each NE., SE., SW. and NW. of
cor.

Thence,
N.1°34'W., on true line, bet. secs. 34 and 35 (S.2).
Over mountainous land, thru. dense timber and undergrowth.
Ascend slightly over W. slope, to
3.00 Wash, 20 lks. wide, 2 ft. deep, course W.
Ascend 560 ft., over S. slope, to
31.40 Rim of mesa, brs. E. and W. Thence over nearly level land
on mesa.
38.78 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 34 and 35, which
is a lava stone 8x10x20 ins. above ground, marked $\frac{1}{4}$
on W. face, and witnessed by a mound of stone W. of cor.
No trace of original bearing tree can be found.
Reconstruct this cor. monument as follows:
Alongside old cor. stone set an iron post, 3 ft. long, 1 in.
in diam., 14 ins. in the ground to bed rock, and raise
a mound of stone around post for $\frac{1}{4}$ sec. cor. of secs. 34
and 35, marked on brass cap,

$\frac{1}{4}$
S34 | S35

1925

from which,

A yellow pine, 12 ins. in diam., brs. S.46°E., 50
lks. dist., marked $\frac{1}{4}$ S 35 BT.

A yellow pine, 16 ins. in diam., brs. S.47°W., 20
lks. dist., marked $\frac{1}{4}$ S 34 BT.

Thence,
N.1°44'E., on true line, bet. secs. 34 and 35 (N. $\frac{1}{4}$).
Over nearly level land on mesa, thru. dense timber and
undergrowth.
6.00 Rim of mesa, brs. E. and W. Leave mesa. Enter mountainous
land.
Descend 320 ft., over steep N. slope.
20.40 Wash, 10 lks. wide, course W.

Chains.

38.00 Ascend 456 ft., over SW. slope.
Ridge, brs. NW and SE.
40.18 Descend 41 ft., over NE. slope, to
(Proportional dist.)
Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
the ground, for reestablished cor. of secs. 26, 27, 34
and 35, marked on brass cap,

T6N	R30E
S27	S26
S34	S35

1925

from which,

A spruce, 6 ins. in diam., brs. N. 79° E., 11 lks.

dist., marked T6N R30E S26 BT.

A spruce, 6 ins. in diam., brs. S. 36° E., 8 lks.

dist., marked T6N R30E S35 BT.

A spruce, 8 ins. in diam., brs. S. 82° W., 35 lks.

dist., marked T6N R30E S34 BT.

A spruce, 8 ins. in diam., brs. N. 65° W., 3 lks.

dist., marked T6N R30E S27 BT.

No trace of original sec. cor. can be found in this vicinity.

Land, mountainous and nearly level.

Soil, rocky, 4th rate.

Timber, yellow pine, fir, spruce, oak and juniper.

Undergrowth, scrub oak, manzanita and thorn brush.

From the cor. of secs. 25, 26, 35 and 36,
S. 89° 50' W., on true line, bet. secs. 26 and 35.
Over mountainous land, thru dense timber and undergrowth.
Descend 29 ft., over N. and NW. slopes.
11.00 Wash, 20 lks. wide, course NW. Enter rolling land.
39.24 Descend 102 ft., over rolling N. slope, to
(Midpoint) Set an iron post, 3 ft. long, 1 in. in diam.,
24 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of
secs. 26 and 35, marked on brass cap,

$\frac{1}{4}$ S	26
S	35

1925

from which,

A yellow pine, 24 ins. in diam., brs. N. 20° E., 74

lks. dist., marked $\frac{1}{4}$ S 26 BT.

A yellow pine, 28 ins. in diam., brs. S. 77° W., 38

lks. dist., marked $\frac{1}{4}$ S 35 BT.No trace of original $\frac{1}{4}$ sec. cor. can be found in this
vicinity.

40.05 Descend 60 ft., over NW. slope.
Old pole fence, brs. N. and S.
53.20 Center of shallow draw, 100 lks. wide, course N. Enter
mountainous land.
Ascend 304 ft. over NE. slope to sec. cor.
53.50 Fence brs. NE. and SW.
54.20 Fence brs. NW. and SE.
78.48 Intersect the cor. of secs. 26, 27, 34 and 35.
Land, mountainous and rolling.
Soil, rocky, 4th rate.
Timber, yellow pine, fir, spruce and aspen.
Undergrowth, scrub oak, thorn brush and manzanita.

N. 0° 42' E., on true line, bet. secs. 26 and 27.
Over mountainous land, thru dense timber and undergrowth.
Descend 537 ft. over steep NE. slope.
18.50 Foot of steep slope, brs. NW and SE. Log corral, 2 chs.
square, brs. E. about 2 chs. dist. Enter rolling land.
Descend gradually over N. slope.

Resurvey of Subdivision lines of Township 6 North, Range 30 East. 27

Chains.
 20.50 Fence brs.NE. and S.75°W. Leave timber, brs.E.and W.
 25.00 Wash,10 lks.wide, 3 ft. deep, with stream of water,4 lks.
 wide, 6 ins. deep, course SW. Thence over nearly level
 land in cultivated field.
 25.10 Road brs.NE. and SW.
 28.30 Wash,10 lks.wide, 5 ft. deep, with stream of water,5 lks.
 wide, 8 ins. deep, course SW.
 28.90 Leave nearly level cultivated land, brs.NE. and SW.,and
 enter rolling land and scattering timber.
 Ascend 40 ft.,over SE.slope, to $\frac{1}{4}$ sec.cor.
 37.00 Fence brs. NE. and SW.
 39.50 Alpine-Nutriosio Highway, brs.NE. and SW.
 40.16 (Midpoint) Set an iron post, 3 ft.long, 1 in. in diam.,24
 ins. in the ground, for reestablished $\frac{1}{4}$ sec.cor. of
 secs.26 and 27, marked on brass cap,

$\frac{1}{4}$
 S27 | S26

1925

from which,

A yellow pine, 24 ins. in diam.,brs.S.80°E.,80 lks.
 dist., marked $\frac{1}{4}$ S 26 BT.

A yellow pine, 14 ins in diam.,brs.N.37 $\frac{1}{2}$ °W.,139
 lks.dist., marked $\frac{1}{4}$ S 27 BT.

No trace of the original $\frac{1}{4}$ sec.cor. can be found in this
 vicinity.

N. end of an old house brs.S.59°10'E., about 25 chs.dist.

Fence cor.brs.N. 46°E.,324 lks.dist., from which fences
 extend E. and SSW.

East cor.of a Forest Service wire corral, brs.N.56°W.,8
 lks.dist.

Ascend 10 ft.,over gradual SE.slope.

41.82 Telephone line, brs.NE. and SW.

42.00 Enter mountainous land:

Ascend 160 ft., over SE. slope.

50.00 Point of spur, slopes SE.

Ascend gradually over E.slope.

61.00 Descend 25 ft.,over NE. slope.

64.70 Wash,10 lks.wide. course SE.

Ascend 316 ft., over SE.slope,to

80.32 Intersect the point of original location of the cor.of
 secs. 22,23,26 and 27, determined by measurement, as
 per record from the original bearing tree, which is
 an oak, 10 ins. in diam., S.50°W.,10 lks.dist.,marked
 T6N R30E S27 BT.

Reconstruct this cor.monument as follows:

At original cor.point, set an iron post 3 ft.long, 2 ins.
 in diam.,12 ins. in the ground to bed rock, supported
 in a mound of stone for cor. of secs.22,23,26 and 27,
 marked on brass cap,

T6N R30E

S22 | S23

S27 | S26

1925

In addition to the original bearing tree described above,
 establish four new bearing trees:

A yellow pine, 8 ins. in diam.,brs.N.22°E.,28
 lks.dist., marked T6N R30E S23 BT.

A yellow pine,10 ins. in diam.,brs.S.52°E.,53
 lks.dist., marked T6N R30E S26 BT.

A yellow pine,16 ins.in diam.,brs.S.65°W.,48
 lks.dist. marked T6N R30E S27 BT.

An oak,12 ins.in diam.,brs.N.56°W.,47 lks.
 dist., marked T6N R30E S22 BT.

Land,mountainous and rolling.

Soil,rocky, 4th rate.

Timber, yellow pine, fir,spruce,juniper,oak and aspen.

Undergrowth, scrub oak, manzanita and thorn brush.

BOOK 3737

BOOK 3737

28 Resurvey of Subdivision Lines of Township 6 North, Range 30 East

Chains.	
	From the cor. of secs. 23, 24, 25 and 26, N. 89° 41' W., on true line, bet. secs. 23 and 26 (E. $\frac{1}{2}$). Over mountainous land, thru. dense timber and undergrowth.
3.00	Descend 28 ft., over NW. slope, to Wash, 10 lks. wide, with a stream of water, 5 lks. wide, 5 ins. deep, course SW.
4.50	Descend gradually over NW. slope, to Same wash, course NW.
6.00	Ascend 20 ft., over NE. slope. Spur, slopes NW.
37.00	Descend 273 ft., over W. slope. Wash, 30 lks. wide, course SW. Enter rolling land.
39.98	Descend gradually over S. slope, to Intersect point of original location of the $\frac{1}{4}$ sec. cor. of secs. 23 and 26 determined by measurement as per record from the original bearing tree, which is a yellow pine 30 ins. in diam., N. 85° W., 30 lks. dist., marked $\frac{1}{4}$ S BT. There is a small mound of stone N. of cor. Reconstruct this cor. monument as follows: At original cor. point, set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground marked on brass cap,
	$\frac{1}{4} \text{ S } 23$ $\frac{1}{4} \text{ S } 26$ 1925
	In addition to the old bearing tree, establish two new bearing trees: A yellow pine, 14 ins. in diam., brs. N. 30° E., 69 lks. dist., marked $\frac{1}{4}$ S 23 BT. A yellow pine, 30 ins. in diam., brs. S. 11° W., 30 lks. dist., marked $\frac{1}{4}$ S 26 BT. Thence, N. 89° 17' W., on true line, bet. secs. 23 and 26 (W. $\frac{1}{2}$). Over rolling land, thru. dense timber and undergrowth.
10.00	Descend 90 ft., over S. and SW. slopes. Creek, 20 lks. wide, 8 ins. deep, course S. Leave timber, and enter open park, brs. N. and S.
13.50	Ascend gradually over E. slope. Alpine-Nutriso road, brs. N. and S.
13.70	Set an oak stake, 6-ins. square, 5 ft. long, 2 ft. in the ground supported in a mound of stone for line monument, marked
	LINE BET SECS. 23 - 26.
16.00	Telephone line, brs. N. 10° E. and S. 10° W.
17.00	Enter mountainous land. Ascend 454 ft., over SE. slope, to
38.06	Intersect the cor. of secs. 22, 23, 26 and 27. Land, mountainous and rolling. Soil, rocky, 4th rate. Timber, yellow, pine, spruce, fir, aspen, oak and juniper. Undergrowth, scrub oak, thorn brush and manzanita.

	N. 1° 35' E., on true line, bet. secs. 22 and 23. Over mountainous land, thru. dense timber and undergrowth.
1.00	Ascend 22 ft., over SE. slope. Ridge, brs. NE. and SW.
14.00	Descend 183 ft., over NW. slope. Wash, 10 lks. wide, course NE.
19.80	Ascend 150 ft., over SE. slope. Fence, brs. NE. and SW.
19.90	Spur, slopes NE.
40.01	Descend 383 ft., over N. slope, to (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 22 and 23, marked on brass cap,
	$\frac{1}{4} \text{ S } 22 \mid \text{ S } 23$ 1925

Resurvey of Subdivision lines of Township 6 North, Range 30 East. 29

Chains.

from which,
 A fir, 26 ins. in diam., brs. S. 18° E., 85 lks. dist.
 marked $\frac{1}{4}$ S 23 BT.
 A fir, 14 ins. in diam., brs. S. 81° W., 83 lks. dist.,
 marked $\frac{1}{4}$ S 22 BT.
 No trace of the original $\frac{1}{4}$ sec. cor. can be found in this
 vicinity.
 Descend 63 ft., over N. slope.
 47.00 Center of shallow draw, 200 lks. wide, course NW.
 Ascend 72 ft., over SW. slope.
 52.50 Alpine-Nutrioso Highway, brs. NW. and SE.
 52.70 Set an oak stake, 6 ins. square, 5 ft. long, 3 ft. in the ground
 supported in a mound of stone, for line monument, marked
 LINE BET. SECS. 22-23.
 54.30 Telephone line, brs. NW and SE.
 57.00 Spur, slopes W.
 Descend 30 ft., over N. slope.
 58.90 Wash, 20 lks. wide, course SW. Asc. 34 ft., over SE. slope.
 66.00 Spur, slopes SW. Desc. 40 ft., over NW. slope.
 69.70 Wash, 20 lks. wide, course SW.
 Ascend 151 ft., over S. slope, to
 80.02 (Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in
 diam., 24 ins. in the ground, for reestablished cor. of
 secs. 14, 15, 22 and 23, marked on brass cap,
 T6N R30E
 S15 | S14
 S22 | S23
 1925

from which,
 A yellow pine, 12 ins. in diam., brs. N. 71° E., 139
 lks. dist., marked T6N R30E S14 BT.
 A yellow pine, 18 ins. in diam., brs. S. 45° E., 66
 lks. dist., marked T6N R30E S23 BT.
 A yellow pine, 14 ins. in diam., brs. S. 75° W., 35
 lks. dist., marked T6N R30E S22 BT.
 A yellow pine, 16 ins. in diam., brs. N. 19° W., 84
 lks. dist., marked T6N R30E S15 BT.
 No trace of the original sec. cor. can be found in this
 vicinity.
 Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, yellow pine, fir, spruce, aspen, oak and juniper.
 Undergrowth, scrub oak, thorn brush and manzanita.

From the cor. of secs. 13, 14, 23 and 24,
 N. 89° 35' W., on true line, bet. secs. 14 and 23.
 Over nearly level top of mountain, bearing E. and W., thru.
 scattering timber and undergrowth.
 10.00 Rim, brs. NE and SW. Leave top of mountain. Enter mountain-
 ous land; dense timber and undergrowth.
 Descend 812 ft., over steep broken NW. slope, to
 41.09 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins.
 in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 14
 and 23, marked on brass cap,
 S 14
 S 23
 1925

from which,
 A fir, 20 ins. in diam., brs. S. 27° W., 100 lks. dist.,
 marked $\frac{1}{4}$ S 23 BT.
 A fir, 14 ins. in diam., brs. N. 44° W., 44 lks. dist.,
 marked $\frac{1}{4}$ S 14 BT.
 No trace of the original $\frac{1}{4}$ sec. cor. can be found in this
 vicinity. Desc. 290 ft., over NW. slope.
 62.30 Wash, 20 lks. wide, course SW. Asc. 25 ft., over SE. slope.
 68.00 Descend 44 ft., over S. slope, to

BOOK 3737

30 Resurvey of Subdivision lines of Township 6 North, Range 30 East.

Chains.

- 82.18 Intersect the cor. of secs. 14, 15, 22 and 23.
Land, mountainous.
Soil, rocky, 4th rate.
Timber, yellow pine, fir, spruce, aspen, oak and juniper.
Undergrowth, scrub oak, thorn brush and manzanita.
-
- N. 6° 52' E., on true line, bet. secs. 14 and 15.
Over mountainous land, thru. dense timber and undergrowth.
Ascend 106 ft., over S. slope.
- 5.00 Spur, slopes W. Desc. 149 ft., over N. slope.
14.90 Wash, 10 lks. wide, course W. Asc. 374 ft., over S. slope.
35.40 Ridge, brs. E. and W. Desc. 166 ft., over N. slope, to
40.30 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam.,
24 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of
secs. 14 and 15, marked on brass cap,
- $\frac{1}{4}$
 S15 | S14
 1925
- from which,
An aspen, 6 ins. in diam., brs. N. 78° E., 3 lks.
dist., marked $\frac{1}{4}$ S 14 BT.
A spruce, 8 ins. in diam., brs. S. 75° W., 40 lks.
dist., marked $\frac{1}{4}$ S 15 BT.
No trace of the original $\frac{1}{4}$ sec. cor. can be found in this
vicinity. Desc. 578 ft., over N. slope.
- 55.80 Wash, 10 lks. wide, with a stream of water, 4 lks. wide, 2 ins.
deep, course SW.
Ascend 560 ft., over S. slope, to
- 80.60 Intersect the original cor. of secs. 10, 11, 14 and 15, which
is a lava stone 4x14x20 ins. above ground, firmly set
marked with 2 notches on E. face, and 4 notches on S.
face, and witnessed by a mound of stone W. of cor., and
one bearing tree:
A yellow pine, 18 ins. in diam., S. 61° E., 22 lks.
dist., marked T6N R30E S14 BT.
No trace of the original SW. bearing tree can be found.
Reconstruct this cor. monument as follows:
Alongside old cor. stone, set an iron post, 3 ft. long, 2
ins. in diam., 24 ins. in the ground for reestablished
cor. of secs. 10, 11, 14 and 15, marked on brass cap,
- T6N R30E
 S10 | S11
 S15 | S14
 1925
- In addition to the original bearing tree described above,
establish four new bearing trees:
A yellow pine, 16 ins. in diam., brs. N. 60° E.,
109 lks. dist., marked T6N R30E S11 BT.
A yellow pine, 16 ins. in diam., brs. S. 63° E., 22
lks. dist., marked T6N R30E S14 BT.
A yellow pine, 14 ins. in diam., brs. S. 33° W., 23
lks. dist., marked T6N R30E S15 BT.
A yellow pine, 16 ins. in diam., brs. N. 83° W., 62
lks. dist., marked T6N R30E S10 BT.
- Land, mountainous.
Soil, rocky, 4th rate.
Timber, yellow pine, fir, spruce, aspen, oak and juniper.
Undergrowth, scrub oak, thorn brush and manzanita.
-
- From the cor. of secs. 11, 12, 13 and 14,
N. 89° 25' W., on true line, bet. secs. 11 and 14 (E. 2).
Over mountainous land, thru. dense timber and undergrowth.
Descend 211 ft., over N. and NW. slopes.
- 26.30 Wash, 40 lks. wide, with a stream of water, 15 lks. wide, 6
ins. deep, course SW.
Ascend 69 ft., over SE. slope, to

Resurvey of Subdivision lines of Township 6 North Range 30 East 31

Chains.

39.80 Intersect point of original location of the $\frac{1}{4}$ sec.cor.of secs.11 and 14, determined by measurement as per record from the original bearing tree:
 A yellow pine, 30 ins.in diam.,S.15°W., 38 lks.dist., marked $\frac{1}{4}$ S B T.
 Reconstruct this cor.monument, as follows:
 At original cor.point, set an iron post, 3 ft.long, 1 in. in diam., 24 ins. in the ground for $\frac{1}{4}$ sec.cor.of secs. 11 and 14, marked on brass cap,

$\frac{1}{4}$ S 11
 S 14
 1925

In addition to the original bearing tree, establish two new bearing trees:

A yellow pine,30 ins. in diam.,brs.W.15°E.,105 lks.dist., marked $\frac{1}{4}$ S 11 BT.

A yellow pine, 20 ins. in diam.,brs.W.81°E., 82 lks.dist., marked $\frac{1}{4}$ S 14 BT.

Thence,
 N.89°58'W.,on true line, bet. secs.11 and 14 (W. $\frac{1}{4}$).
 Over mountainous land, thru.dense timber and undergrowth.
 Ascend 278 ft., over SE. slope.

24.00 Short spur,slopes SW.
 Descend 46 ft.,over SW.slope.

33.00 Head of wash, course SW.
 Ascend 97 ft., over SE.slope,to

39.82 Intersect the cor.of secs. 10,11,14 and 15.
 Land,mountainous.
 Soil,rocky,4th rate.

Timber,yellow pine,fir, spruce, aspen,oak and juniper.
 Undergrowth, scrub oak, thorn brush and manzanita.

N.0°2'W., on true line, bet. secs. 10 and 11 (S. $\frac{1}{2}$).

Over mountainous land, thru. dense timber and undergrowth.
 Ascend 40 ft., over S.slope.

1.70 Ridge, brs.E.and W.
 Descend 362 ft., over N.slope.

22.80 Creek, with stream of water,10 lks.wide, 4 ins.deep,course SW.

Ascend 121 ft., over S.slope to $\frac{1}{4}$ sec.cor.
 25.30 Trail, brs.E.and W.

39.28 Intersect point of original location of the $\frac{1}{4}$ sec.cor. of secs. 10 and 11, determined by measurement as per record from the original bearing tree:

A pine, 24 ins. in diam.,S.40°W.,22 lks.dist., marked $\frac{1}{4}$ S B T.

Reconstruct this cor.monument as follows: At original cor.point set an iron post, 3 ft.long, 1 in. in diam., 24 ins. in the ground for $\frac{1}{4}$ sec.cor. of secs.10 and 11 marked on brass cap,

$\frac{1}{4}$
 S10 | S11
 1925

from which,

A yellow pine, 18 ins. in diam.,brs.S.63°E., 122 lks. dist., marked $\frac{1}{4}$ S 11 BT.

A yellow pine, 12 ins. in diam.,brs.S.88°W., 55 lks.dist., marked $\frac{1}{4}$ S10 BT.

N.0°36'E., on true line, bet. secs. 10 and 11 (N. $\frac{1}{2}$).
 Over mountainous land, thru. dense timber and undergrowth.
 Ascend 123 ft., over S.slope.

32 Resurvey of Subdivision lines of Township 6 North, Range 30 East.

Chains.

16.60 Spur, slopes W.
Descend 229 ft., over NW.slope.

33.00 Blazed trail, and telephone line, brs.NE and SW.

36.90 Wash, 40 lks.wide, with a stream of water; 20 lks.wide,
3 ins. deep, course SW. Enter rolling land.
Ascend 23 ft., over S.slope, to

39.12 Intersect the original cor.of secs.2,3,10 and 11, which is
an old wooden post illegibly marked, projecting 15 ins.
above a mound of earth and stone in which it is set
and witnessed by two bearing trees:
A yellow pine, 30 ins. in diam., S.36°E., 37 lks.
dist., marked T6N R30E S11 BT., and
a yellow pine, 30 ins. in diam., N.76°W., 50 lks.
dist., marked T6N R30E S3 BT.
Reconstruct this cor. monument, as follows:
Alongside old wooden post, set an iron post, 3 ft.long, 2
ins. in diam., 24 ins. in the mound for cor.of secs.
2,3, 10 and 11, marked on brass cap,

T6N	R30E
S 3	S 2
S10	S11
1925	

In addition to the two old bearing trees described above,
establish four new bearing trees:
A yellow pine, 20 ins. in diam., brs.N.49°E., 78
lks.dist., marked T6N R30E S2 BT.
A yellow pine, 20 ins. in diam., brs.S.72°E., 47
lks.dist., marked T6N R30E S11 BT.
A yellow pine, 14 ins. in diam., brs.S.18°W., 171
lks.dist., marked T6N R30E S10 BT.
A yellow pine, 30 ins. in diam., brs.N.54°W., 174
lks.dist., marked T6N R30E S3 BT.

Land, mountainous.
Soil, rocky, 4th rate.
Timber, yellow pine, spruce, fir, aspen, oak and juniper.
Undergrowth, scrub oak, thorn brush and manzanita.

From the cor.of secs. 1,2,11 and 12,
S.83°48'W., on true line, bet. secs.2 and 11 (E. $\frac{1}{2}$).
Over rolling land, thru. dense timber and undergrowth.
Descend 49 ft., over SW.slope, to

7.40 Wash, 10 lks.wide, course SW.
Descend 80 ft., over S.slope to $\frac{1}{4}$ sec.cor.

12.90 Telephone line, brs.NE. and SW.
Trail, brs.NE. and SW.

16.90 Wash, 20 lks.wide, course S.

34.00 Wash, 20 lks.wide, course S.

37.22 Intersect the original $\frac{1}{4}$ sec.cor.of secs.2 and 11, which
is a lava stone 4x10x11 ins. above ground, marked $\frac{1}{4}$ on
N.face, and witnessed by a mound of stone, N. of cor.
No bearing trees.
Reconstruct this cor.monument as follows:
Alongside old cor.stone, set an iron post, 3 ft.long, 1 in.
in diam., 24 ins. in the ground for $\frac{1}{4}$ sec.cor.of secs.
2 and 11, marked on brass cap,

$\frac{1}{4}$	S 2
S 11	
1925	

from which,
A yellow pine, 18 ins.in diam., brs. N.10°E., 50
lks.dist., marked $\frac{1}{4}$ S 2 BT.
A yellow pine, 12 ins.in diam., brs.S.61°E., 84
lks.dist., marked $\frac{1}{4}$ S 11 BT.

Thence,
S.87°45'W., on true line, bet.secs.2 and 11 (W. $\frac{1}{2}$).

Resurvey of Subdivision lines of Township 6 North, Range 30 East. 33

Chains.		
	Over rolling land, thru dense timber and undergrowth. Descend gradually over SW. slope.	
4.50	Trail, brs. NW. and SE.	
7.50	Wash, 20 lks. wide, course NW. Descend gradually over NW. slope.	
31.20	Blazed trail, brs. NE. and SW.	
33.00	Wash, 30 lks. wide, with a stream of water, 20 lks. wide, 2 ins. deep, course SW.	
39.60	Ascend gradually over S. slope, to the cor. of secs. 2, 3, 10 and 11. Land, rolling. Soil, rocky, 4th rate. Timber, yellow pine, fir, spruce, oak, aspen and juniper. Undergrowth, sage brush, scrub oak, thorn brush and manzanita.	

	From the cor. of secs. 2 and 3 on the N. bdy. of the Tp., described in Book "G" of this group, S. 9° 25' E., on true line, bet. secs. 2 and 3. Over mountainous land, thru dense timber and undergrowth. Descend 75 ft. over W. and SW. slopes.	
8.10	Milk Creek, containing a stream of water, 15 lks. wide, 6 ins. deep, course NW.	
18.30	Ascend 197 ft., over NE. slope, to rim of bench, brs. NW. and SE. Thence over rolling land on bench.	
25.00	Ascend 40 ft., over NE. slope, to $\frac{1}{4}$ sec. cor.	
26.70	Leave timber, brs. E. and W.	
29.00	Wash, 10 lks. wide, 3 ft. deep, course N. 70° E.	
38.00	Wash, 15 lks. wide, 3 ft. deep, course N. 70° E. Enter timber, brs. E. and W. Pole corral, brs. E. about 2 chs. dist.	
38.90	(Proportionate dist.) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 2 and 3, marked on brass cap,	
	$\frac{1}{4}$	
	S 3 S 2	
	1925	
	from which, A yellow pine, 30 ins. in diam., brs. N. 22° E., 27 lks. dist., marked $\frac{1}{4}$ S 2 BT. An aspen, 12 ins. in diam., brs. S. 67 $\frac{1}{2}$ ° W., 98 lks. dist., marked $\frac{1}{4}$ S 3 BT.	
	No trace of the original $\frac{1}{4}$ sec. cor. can be found in this vicinity.	
56.50	Leave rolling land on bench and enter mountainous land. Ascend 167 ft., over NE. slope. Ridge, brs. NW. and SE.	
76.80	Descend 198 ft., over SW. slope to sec. cor. Road brs. NE. and SW. Enter rolling land.	
78.39	Intersect the cor. of secs. 2, 3, 10 and 11. Land, mountainous and rolling. Soil, rocky, 4th rate. Timber, yellow pine, fir, spruce, aspen and juniper. Undergrowth, scrub oak, manzanita and thorn brush.	

	The cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp., reconstructed in original position in 1916 is an iron post, 2 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by four properly marked bearing trees, one each NE., SE., SW. and NW. of cor. Thence, N. 0° 30' E., on true line, bet. secs. 33 and 34.	

34 Resurvey of Subdivision lines of Township 6 North, Range 30 East.

Chains.

- Over rolling land, thru. scattering timber and undergrowth.
Ascend gradually over SE. slope.
- 0.90 Road, brs.E.and W.
1.20 Fence brs.E.and W.
10.90 Wash, 15 lks.wide, course SE. Enter nearly level cultivated land, brs.NW. and SE.
15.90 Fence, brs.E.and W. Leave cultivated land, brs.E.and W.
16.30 Road, brs.E.and W. Enter dense timber.
20.00 Leave nearly level, and enter rolling land.
Ascend 34 ft., over gradual S.slope, to
28.00 Enter mountainous land.
Ascend 300 ft., over SW. slope, to
35.89 (Midpoint) Set an iron post, 3 ft.long, 1 in.in diam., 24 ins. in the ground, for reestablished $\frac{1}{4}$ sec.cor. of secs. 33 and 34, marked on brass cap,
- $\frac{1}{4}$
 S33 | S34
 1925
- from which,
A yellow pine, 14 ins. in diam., brs.N.26°E., 100 lks.dist. marked $\frac{1}{4}$ S 34 BT.
A yellow pine, 14 ins.in diam., brs.S.76°W., 64 lks.dist., marked $\frac{1}{4}$ S 33 BT.
No trace of original $\frac{1}{4}$ sec.cor. can be found in this vicinity.
Ascend 357 ft., over steep SW.slope, to
50.50 Rim of bench, brs.NW. and SE. Thence over nearly level land on bench.
Ascend slightly over SE.slope, to
71.78 Intersect remains of the original cor.of secs. 27, 28, 33 and 34, which is a dead and fallen pine tree, 24. ins. in diam., marked S 27 on one face, S28 on another, S 34 on another, and S33 on another face, and witnessed by two bearing trees:
A yellow pine, 16 ins.in diam., N.34°E., 5 lks. dist., marked T6N R30E S27 BT., and
A yellow pine, 14 ins. in diam., N.50°W., 9 lks. dist., marked T6N R30E S28 BT.
The NE. bearing tree is not of record, and the NW. tree disagrees with record in bearing and dist.
Reconstruct this cor.monument, as follows:
At approximately the center of the position originally occupied by the old tree cor., and alongside butt of same, set an iron post, 3 ft.long, 2 ins.in diam., 24 ins. in the ground, marked on brass cap,
- T6N R30E
 S28 | S27
 S33 | S34
 1925
- In addition to the two old bearing trees described above, establish four new bearing trees:
A yellow pine, 10 ins. in diam., brs.N.51°E., 31 lks.dist., marked T6N R30E S27 BT.
A yellow pine, 40 ins. in diam., brs.S.20°E., 66 lks.dist., marked T6N R30E S34 BT.
A yellow pine, 28 ins.in diam., brs.S.58°W., 182 lks.dist., marked T6N R30E S33 BT.
A yellow pine, 30 ins. in diam., brs.N.58°W., 62 lks.dist., marked T6N R30E S28 BT.
Land, rolling, nearly level and mountainous.
Soil, S.15 chs. sandy loam, 1st and 2nd rate; remainder, rocky, 4th rate.
Timber, yellow pine, fir, spruce, oak and juniper.
Undergrowth, scrub oak, manzanita and thorn brush.

Resurvey of Subdivision lines of Township 6 North, Range 30 East. 35

Chains	
	From the cor. of secs. 26, 27, 34 and 35, S. $88^{\circ}50'W.$, on true line, bet. secs. 27 and 34 (E. $\frac{1}{2}$). Over mountainous land, thru, dense timber and undergrowth. Ascend 47 ft., over NE. slope.
8.50	Ridge, brs. NW, and SE., near NW. end of same. Descend 537 ft., over steep and broken W. slope.
23.90	Creek, with a stream of clear water, 10 lks. wide, 6 ins. deep, course S. Enter nearly level bottom land.
25.50	Highway, Alpine-Nutrioso, brs. N. and S.
25.64	Set an oak post 4 ins. square, 4 ft. long, 2 ft. in the ground supported in a mound of stone, for line monument, marked T6N R30E LINE BET. SECS. 27-34.
26.10	Telephone line, brs. N. $10^{\circ}E$ and S. $10^{\circ}W.$ at foot of E. slope. Enter mountainous land.
39.59	Ascend 193 ft., over E. slope, to Intersect the original $\frac{1}{4}$ sec. cor. of secs. 27 and 34, which is a lava stone, $6 \times 12 \times 18$ ins. above ground, firmly set, marked $\frac{1}{4}$ on N. face, and witnessed by a mound of stone N. of cor., and one bearing tree: An oak, 8 ins. in diam., S. $49^{\circ}W.$, 18 lks. dist., marked $\frac{1}{4}S$ BT. This tree is of record as N. $45^{\circ}W.$, 18 lks. dist. from cor., but there is no evidence of the cor. stone having been moved. Reconstruct this cor. monument as follows: Alongside old cor. stone, set an iron post 3 ft. long, 1 in. in diam., 24 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap, $\begin{array}{r} \frac{1}{4} S 27 \\ \frac{1}{4} S 34 \\ 1925 \end{array}$ In addition to the old bearing tree, establish two new bearing trees: A yellow pine, 18 ins. in diam., brs. N. $86^{\circ}W.$, 34 lks. dist., marked $\frac{1}{4} S 27$ BT. A yellow pine, 14 ins. in diam., brs. S. $11^{\circ}W.$, 27 lks. dist., marked $\frac{1}{4} S 34$ BT. Thence, N. $89^{\circ}37'W.$, on true line, bet. secs. 27 and 34 (W. $\frac{1}{2}$). Over mountainous land, thru, dense timber and undergrowth. Ascend 500 ft., over E. slope, to
34.00	Rim of bench, brs. N. and S. Enter gently rolling land on bench.
39.29	Ascend 34 ft., over SE. slope, to Intersect the cor. of secs. 27, 28, 33 and 34. Land, mountainous, nearly level and gently rolling. Soil, rocky, 4th rate. Timber, yellow pine, fir, spruce, oak and juniper. Undergrowth, scrub oak, manzanita and thorn brush.

	North, on true line, bet. secs. 27 and 28. Over gently rolling land on bench, thru, dense timber and undergrowth. Ascend gradually over SE. slope, to
3.29	Leave bench, brs. E. and W. Enter mountainous land. Ascend 284 ft., over SE. slope, to
20.00	S. edge of top of ridge, bearing NE. and W. Thence across nearly level top of ridge.
30.00	N. edge of top of ridge, brs. E. and W. Leave top of ridge. Enter mountainous land. Desc. 160 ft. over N. slope, to
39.51	(Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 27 and 28, marked on brass cap, $\begin{array}{r} \frac{1}{4} \\ S 28 \ S 27 \\ 1925 \end{array}$

Chains.

from which,
 A spruce, 4 ins. in diam., brs.S.44°E., 23 lks.
 dist., marked $\frac{1}{4}$ S 27 BT.
 A spruce, 4 ins. in diam., brs.S.68°W., 23 lks.
 dist., marked $\frac{1}{4}$ S 28 BT.
 No trace of the original $\frac{1}{4}$ sec.cor. can be found in this
 vicinity.
 Descend 301 ft., over N.slope.
 53.00 Wash, 20 lks.wide, course NE.
 Ascend 425 ft., over SE.slope.
 69.00 Fence, brs.E.and W.
 74.60 Rim of mesa, brs.E.and W. Thence over gently rolling land
 on mesa.
 Ascend slightly over E.slope, to
 79.02 (Proportional distance) on cor.) Set an iron post, 3 ft.
 long, 2 ins. in diam., 24 ins. in the ground for re-
 established cor.of secs. 21, 22, 27 and 28, marked on
 brass cap,

T6N R30E	
S21	S22
S28	S27
1925	

from which,
 A yellow pine, 20 ins. in diam., brs.N.37°E., 77
 lks.dist., marked T6N R30E S22 BT.
 A yellow pine, 20 ins. in diam., brs.S.48°E., 119
 lks.dist., marked T6N R30E S27 BT.
 A yellow pine, 20 ins. in diam., brs.S. 76°W., 38
 lks.dist., marked T6N R30E S28 BT.
 A yellow pine, 20 ins. in diam., brs.N.20°W., 46
 lks.dist., marked T6N R30E S21 BT.
 No trace of original sec.cor. can be found in this vicin-
 ity.
 Land, gently rolling, mountainous and nearly level.
 Soil, rocky, 4th rate.
 Timber, yellow pine, aspen, spruce, fir and oak.
 Undergrowth, scrub oak, manzanita and thorn brush.

 From the cor. of secs. 22, 23, 26 and 27,
 S.89°27'W., on true line, bet. secs. 22 and 27 ($E.\frac{1}{2}$).
 Over mountainous land, thru. dense timber and undergrowth.
 Ascend 28 ft., over SE.slope.
 4.00 Ridge, brs.NE. and SW.
 Descend 210 ft., over NW.slope.
 26.45 Fence, brs.NE. and SW.
 39.20 Wash, 20 lks.wide, course N:
 Ascend slightly over E.slope, to
 39.74 Intersect the original $\frac{1}{4}$ sec.cor. of secs. 22 and 27, which
 is a lava stone 6x12x14 ins., marked $\frac{1}{4}$ on N.face, set
 in a mound of stone, and witnessed by two bearing
 trees:
 A dead and fallen aspen, 6 ins. in diam., S.22°W.,
 6 lks.dist., marked $\frac{1}{4}$ S BT., and
 An aspen, 8 ins. in diam., N. 19°W., 6 lks.dist.,
 marked $\frac{1}{4}$ S BT.
 Reconstruct this cor. monument, as follows:
 Remove the mound of stone, and in center of its position,
 reset old cor.stone, 10 ins. in the ground, and along-
 side same set an iron post, 3 ft. long, 1 in. in diam.,
 24 ins. in the ground for $\frac{1}{4}$ sec.cor. of secs. 22 and
 27, marked on brass cap,
 $\frac{1}{4}$ S 22
 S 27
 1925

In addition to the old bearing trees described above,
 establish two new bearing trees:

Resurvey of Subdivision lines of Township 6 North, Range 30 East. 37

Chains.	
	<p>A fir, 6 ins. in diam., brs. S.43°E., 6 lks. dist., marked $\frac{1}{2}$ S 27 BT.</p> <p>A fir, 14 ins. in diam., brs. N.64°W., 49 lks. dist., marked $\frac{1}{2}$ S 22 BT.</p> <p>Thence, S.87°23'W., on true line, bet. secs. 22 and 27 (W. $\frac{1}{2}$). Over mountainous land, thru. dense timber and undergrowth. Ascend 436 ft., over E. slope, to Rim of mesa, brs. NW and SE. Thence over gently rolling land on mesa.</p>
30.00	Ascend slightly over E. slope, to
39.71	Intersect the cor. of secs. 21, 22, 27 and 28. Land, mountainous and gently rolling. Soil, rocky, 4th rate. Timber, yellow pine, fir, spruce, aspen and oak. Undergrowth, scrub oak, manzanita and thorn brush.

	<p>N.0°38'W., on true line, bet. secs. 21 and 22. Over gently rolling land on mesa, thru. dense timber and undergrowth.</p>
2.70	Rim of mesa, brs. NW and E. Leave mesa. Enter mountainous land.
	Descend 368 ft., over N. slope.
22.30	Wash, 20 lks. wide, course E.
	Ascend 135 ft., over SE. slope, to
39.51	(Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 21 and 22, marked on brass cap,
	$\frac{1}{4}$ S21 S22 1925
	from which,
	A yellow pine, 16 ins. in diam., brs. N.33°E., 122 lks. dist., marked $\frac{1}{2}$ S 22 BT.
	A spruce, 8 ins. in diam., brs. N.83°W., 32 lks. dist., marked $\frac{1}{2}$ S 21 BT.
	No trace of the original $\frac{1}{4}$ sec. cor. can be found.
40.00	Asc. slightly over SE. slope. Spur, slopes N. 60°E.
45.00	Descend 40 ft., over gradual NW. slope, to
57.00	Descend 413 ft., over steep NW. slope. Wash, 20 lks. wide, course NE.
	Ascend 164 ft., over SE. slope.
76.00	Spur, slopes NE. Enter gently rolling land on top of spur.
	Descend slightly to
79.02	Intersect the cor. of secs. 15, 16, 21 and 22, reconstructed in 1916 by U.S. Forest Service Surveyor, which is a stone 12x18x20 ins. above ground, marked with 3 notches on each of E. and S. faces, firmly set and witnessed by four bearing trees:
	An oak, 18 ins. in diam., S.88°E., 24 lks. dist., marked T6N R30E S22 BT.
	An oak, 12 ins. in diam., N.87°W., 39 lks. dist., marked T6N R30E S21 BT.
	A yellow pine, 26 ins., N.35°E., 88 lks. dist., marked T6N R30E S15 BT., and
	A yellow pine, 20 ins. in diam., S.41°W., 144 lks. dist., marked T6N R30E S21 BT.
	Reconstruct this cor. monument again as follows: Alongside old cor. stone, set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 15, 16, 21 and 22, marked on brass cap,
	T6N R30E S16 S15 S21 S22 1925

38 Resurvey of Subdivision lines of Township 6 North, Range 30 East.

Chains.

In addition to the old bearing trees described above, establish four new bearing trees:

A yellow pine, 30 ins. in diam., brs. N. 74° E., 94 lks. dist., marked T6N R30E S15 BT.

A yellow pine, 40 ins. in diam., brs. S. 17° E., 26 lks. dist., marked T6N R30E S22 BT.

An oak, 8 ins. in diam., brs. S. 48° W., 37 lks. dist., marked T6N R30E S21 BT.

A yellow pine, 18 ins. in diam., brs. N. 8° W., 145 lks. dist., marked T6N R30E S16 BT.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, yellow pine, spruce, fir, aspen and oak.

Undergrowth, scrub oak, manzanita and thorn brush.

-
- From the cor. of secs. 14, 15, 22 and 23, S. 87° 35' W., on true line, bet. secs. 15 and 22. Over mountainous land, thru. dense timber and undergrowth. Descend 321 ft., over S. and SW. slopes, to
- 25.85 Fence brs. N. and S. in draw, course NW. Enter nearly level cultivated land.
- 26.07 Fall 30 lks. S. of cor. No. 25 of Forest Homestead Survey No. 239, which is a sandstone 12x18x12 ins. above ground, marked with a cross (x) on top, and 25HES 239 on NW. face, and two bearing trees, one each NE. and SE. of cor., both marked 25HES 229XBT.
- 32.10 Leave cultivated land, brs. NW. and SE.
- 32+30 Fence brs. NW. and SE. Leave nearly level land, brs. NW. and SE., and enter mountainous land.
- Ascend 35 ft., over NE. slope.
- 34.40 Spur, slopes NW.
- Descend 57 ft., over SW. slope.
- 35.80 Highway, brs. N. and S.
- 35.95 Fence and telephone line, brs. N. and S.
- 38.90 Small creek, with stream of water, 4 lks. wide, 5 ins. deep, course NE.
- Thence, over level bottom land.
- 41.09½ (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground for reestablished ¼ sec. cor. of secs. 15 and 22, marked on brass cap,

¼ S 15
S 22
1925

from which,

A yellow pine, 20 ins. in diam., brs. S. 80° E., 375 lks. dist., marked ¼ S 22 BT.

A yellow pine, 20 ins. in diam., brs. N. 78° W., 333 lks. dist., marked ¼ S 15 BT.

No trace of original ¼ sec. cor. can be found in this vicinity.

Cor. No. 10 of Forest Homestead, Survey No. 239, brs. S. 79° W., 2.25 chs. dist., which is an iron post, 2 ins. in diam., projecting 12 ins. above ground, marked 10 HES 239 on brass cap, and witnessed by a mound of stone NE., and two bearing trees, one each NW. and SW. of post, both marked 10HES 239 X BT.

A house brs. NE. about 5 chs. dist. (Dudley Hamblin's.)

Continue over level bottom land.

- 42.30 Creek, with stream of water, 20 lks. wide, 1 in. deep, course NW., fringed by a growth of willows on each side.
- 44.00 Leave level bottom land. Enter mountainous land. Ascend 119 ft., over E. slope.
- 48.60 Spur, slopes NE.
- Descend 44 ft., over NW. slope.
- 53.00 Wash, 20 lks. wide, course NE.
- Ascend 456 ft., over SE. slope, to
- 75.00 Edge of top of spur, sloping NE. Enter gently rolling land on top of spur. Ascend slightly over NE. slope, to

Resurvey of Subdivision lines of Township 6 North, Range 30 East. 39

Chains.	
82.19	<p>Cor. of secs. 15, 16, 21 and 22. Land, mountainous, nearly level, level and gently rolling. Soil, rocky, 4th rate in mountainous land; elsewhere, sandy, 1st rate+ Timber, yellow pine, spruce, fir, aspen, juniper and oak. Undergrowth, scrub oak, thorn brush and manzanita.</p>
5.00	<p>N. 9° 38' E., on true line, bet. secs. 15 and 16 (S $\frac{1}{2}$). Over gently rolling land on top of spur, slopes NE., thru. dense timber and undergrowth. Descend slightly over NE. slope, to Edge of top of spur, brs. NE. and SW. Enter mountainous land.</p>
33.20	<p>Descend 567 ft., over NW. slope. Wash, 20 lks. wide, course NE. Enter rolling land.</p>
42.84	<p>Ascend gradually over SE. slope, to Intersect the $\frac{1}{4}$ sec. cor. of secs. 15 and 16, reestablished in 1914 by U.S. Forest Service Surveyor, which is a stone, 8x10x12 ins. above ground, firmly set, marked $\frac{1}{4}$ on W. face, and witnessed by two bearing trees: A yellow pine, 24 ins. in diam., S. 43° E., 49 lks. dist., marked $\frac{1}{4}$ S BT., and A yellow pine, 30 ins. in diam., S. 60° W., 53 lks. dist., marked $\frac{1}{4}$ S BT. Reconstruct this cor. monument as follows: Alongside old cor. stone, set an iron post 3 ft. long, 1 in. in diam., 24 ins. in the ground for $\frac{1}{4}$ sec. cor. of secs. 15 and 16, marked on brass cap,</p>
	<p style="text-align: center;"> $\frac{1}{4}$ s16 s15 1925 </p>
	<p>In addition to the old bearing trees described above, es- tablish two new bearing trees: A yellow pine, 24 ins. in diam., brs. S. 51° E., 84 lks. dist., marked $\frac{1}{4}$ S 15 BT. A yellow pine, 20 ins. in diam., brs. S. 66° W., 75 lks. dist., marked $\frac{1}{4}$ S 16 BT.</p>
6.92	<p>Thence, N. 9° 34' E., on true line, bet. secs. 15 and 16 (N. $\frac{1}{2}$). Over rolling land, thru. dense timber and undergrowth. Descend 71 ft., over NE. slope. Intersect cor. No. 1 of Forest Homestead, Survey No. 239, which is an iron post, 2 ins. in diam., projecting 12 ins. above ground, firmly set, marked 1-HES-239 CC on brass cap, and witnessed by two bearing trees, one each NE. and NW. of cor., both marked 1-HES-239 XBT. Continue line and measurement along line 1-2 of HES No. 239 bdy.</p>
7.15	<p>Fence brs. NW. and SE. Enter cultivated land.</p>
9.50	<p>Leave rolling land and enter level bottom land, brs. NW. and SE.</p>
9.75	<p>Paddock Creek, with stream of water, 15 lks. wide, 5 ins. deep, course NW.</p>
14.65	<p>Fence, brs. NW. and SE. Leave cultivated land.</p>
14.85	<p>Highway from Nutrioso to Alpine, brs. NW. and SE.</p>
16.95	<p>Intersect Cor. No. 2 of Forest Homestead Surv. No. 239, which is a stone, 12x10x8 ins. above ground, firmly set, marked with a cross (X) on top and 2-HES-239 CC on SE. face, and witnessed by a mound of stone SE. of cor. and two bearing trees; one each NE. and NW. of cor., both marked 2-HES-239 XBT</p>
23.25	<p>Leave bdy. of Forest Homestead No. 239. Telephone line, brs. NW. and SE. Enter rolling land. Ascend gradually over SW. slope to Shallow draw, 10 lks. wide, course SW. Enter mountainous land Ascend 178 ft. over steep S. slope to top of spur.</p>


40 Resurvey of Subdivision lines of Township 6 North, Range 30 East

Chains	<p>26.00 Foot of cliff, 45 ft. high, brs. E. and W., facing S.</p> <p>26.50 Top of same cliff.</p> <p>30.20 Spur, slopes SW. Desc. 54 ft. over NW. slope.</p> <p>31.30 Wash, 20 lks. wide, course SW. Asc. 63 ft. over S. slope.</p> <p>36.00 Spur, slopes W. Desc. 84 ft. over NW. slope to</p> <p>43.15 Intersect the cor. of secs. 9, 10, 15 and 16, reconstructed by U.S. Forest Service surveyor in 1916, which is a stone 8x12x12 ins. above ground, firmly set, marked with 3 notches on E. face and 4 notches on S. face and witnessed by four bearing trees:</p> <p style="padding-left: 2em;">An oak, 10 ins. in diam., S. 71$\frac{1}{2}$° E., 25 lks. dist., marked T6NR30E S15 BT</p> <p style="padding-left: 2em;">A yellow pine, 26 ins. in diam., S. 26° W., 11 lks. dist., marked T6NR30E S16 BT</p> <p style="padding-left: 2em;">A yellow pine, 8 ins. in diam., N. 53° E., 92 lks. dist., marked T6NR30E S10 BT and</p> <p style="padding-left: 2em;">A yellow pine, 24 ins. in diam., N. 24$\frac{1}{2}$° W., 48 lks. dist., marked T6NR30E S9 BT</p> <p>Reconstruct this cor. monument again as follows: Alongside old cor. stone, set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 9, 10, 15 and 16, marked on brass cap</p> <div style="text-align: center;"> <table border="1" style="margin: auto;"> <tr><td>T6N</td><td>R30E</td></tr> <tr><td>S 9</td><td>S 10</td></tr> <tr><td>S16</td><td>S15</td></tr> <tr><td colspan="2">1925</td></tr> </table> </div> <p>In addition to the old bearing trees described above, establish four new bearing trees:</p> <p style="padding-left: 2em;">An oak, 16 ins. in diam., brs. N. 73° E., 115 lks. dist., marked T6N R30E S10 BT</p> <p style="padding-left: 2em;">A yellow pine, 16 ins. in diam., brs. S. 22° E., 112 lks. dist., marked T6N R30E S15 BT</p> <p style="padding-left: 2em;">A yellow pine, 18 ins. in diam., brs. S. 19° W., 121 lks. dist., marked T6N R30E S16 BT</p> <p style="padding-left: 2em;">A yellow pine, 30 ins. in diam., brs. N. 58$\frac{1}{2}$° W., 43 lks. dist., marked T6N R30E S9 BT</p> <p>Land, rolling, level and mountainous. Soil, rocky 4th rate in mountainous land; elsewhere, sandy, 1st and 2nd rate. Timber, yellow pine, spruce, juniper, oak and aspen. Undergrowth, scrub oak, thorn brush, and manzanita.</p> <hr style="border-top: 1px dashed black;"/> <p>From the cor. of secs. 10, 11, 14 and 15, S. 89° 50' W., on true line, bet. secs. 10 and 15 (E. $\frac{1}{2}$) Over mountainous land, thru dense timber and undergrowth. Ascend 55 ft. over SE. slope.</p> <p>3.00 Ridge, brs. NE. and SW. Desc. 539 ft. over NW. slope to</p> <p>25.30 Wash, 50 lks. wide, banks 8 ft. high, containing a stream of water, 20 lks. wide, 4 ins. deep, course S. Enter nearly level land.</p> <p>26.00 Road, brs. NE. and SW.</p> <p>27.00 Enter mountainous land. Asc. 107 ft. over SE. slope to</p> <p>38.44 Intersect original $\frac{1}{4}$ sec. cor. of secs. 10 and 15, which is a stone 12x14x10 ins. above ground, firmly set, marked $\frac{1}{4}$ on N. face, and witnessed by two bearing trees:</p> <p style="padding-left: 2em;">A yellow pine, 14 ins. in diam., S. 10° E., 8 lks. dist., marked $\frac{1}{4}$ S BT and</p> <p style="padding-left: 2em;">A yellow pine, 20 ins. in diam., N. 30° E., 20 lks. dist., marked $\frac{1}{4}$ S BT</p> <p>Reconstruct this cor. monument as follows: Alongside old cor. stone, set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 10 and 15, marked on brass cap</p>	T6N	R30E	S 9	S 10	S16	S15	1925	
T6N	R30E								
S 9	S 10								
S16	S15								
1925									


$\frac{1}{4}$ S 10
$\frac{1}{4}$ S 15
1925

Chains In addition to the old bearing trees described above, establish two new bearing trees:
 A yellow pine, 30 ins. in diam., brs. N. 30° E., 87 lks. dist. marked $\frac{1}{4}$ S 10 BT
 A yellow pine, 30 ins. in diam., brs. S. 31° W., 55 lks. dist. marked $\frac{1}{4}$ S 15 BT
 Thence
 N. 88° 00' W., on true line, bet. secs. 10 and 15 (W. $\frac{1}{2}$)
 Over mountainous land thru dense timber and undergrowth.
 Asc. 161 ft. over SE. slope.
 20.00 Spur, slopes SW. Desc. 346 ft. over NW. slope to
 39.30 Intersect the cor. of secs. 9, 10, 15 and 16.
 Land, mountainous and nearly level.
 Soil, rocky, 4th rate.
 Timber, yellow pine, spruce, juniper, oak and aspen.
 Undergrowth, scrub oak, manzanita, and thorn brush.

N. 0° 20' W., on true line, bet. secs. 9 and 10.
 Over mountainous land, thru dense timber and undergrowth.
 Desc. 42 ft. over NW. slope
 1.00 Telephone line, brs. NE. and SW.
 5.30 Wash, 10 lks. wide, course SW. Asc. 72 ft. over SE. slope.
 9.20 Blazed trail, brs. NW. and SE.
 14.20 Saddle in ridge, bearing E. and W.
 Desc. 112 ft. over N. slope
 23.20 Wash, 20 lks. wide, course NW. Enter rolling land.
 Asc. 24 ft. over SW. slope
 29.50 Spur, slopes NW. Desc. 50 ft. over NE. slope to
 38.10 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 9 and 10, marked on brass cap



from which
 A yellow pine, 30 ins. in diam., brs. N. 79° E., 38 lks. dist., marked $\frac{1}{4}$ S 10 BT
 A yellow pine, 8 ins. in diam., brs. N. 60° W., 9 lks. dist., marked $\frac{1}{4}$ S 9 BT
 No trace of the original $\frac{1}{4}$ sec. cor. can be found in this vicinity.
 Enter mountainous land. Desc. 167 ft. over NE. slope.
 48.50 Fence, brs. E. and W.
 50.60 Wash, 10 lks. wide, course N. 70° W. Asc. 145 ft. over SW. slope
 65.70 Spur, slopes W. Desc. 59 ft. over NW. slope to
 72.70 Wash, 10 lks. wide, course W. Asc. 80 ft. over SW. slope to
 76.20 Intersect the original cor. of secs. 3, 4, 9 and 10, which is a stone, 14x10x10 ins. above ground, firmly set, marked with 3 notches on E. face and 5 notches on S. face and witnessed by two bearing trees:
 A yellow pine, 24 ins. in diam., S. 70° E., 41 lks. dist., marked T6N R30E S10 BT and
 A yellow pine, 24 ins. in diam., S. 29° W., 30 lks. dist., marked T6N R30E S9 BT
 Reconstruct this cor. monument as follows:
 Alongside old cor. stone, set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 3, 4, 9 and 10, marked on brass cap




In addition to the old bearing trees described above, establish four new bearing trees:
 A yellow pine, 20 ins. in diam., brs. N. 77° E., 70 lks. dist. marked T6N R30E S3 BT

42 Resurvey of Subdivision lines of Township 6 North, Range 30 East


Chains	<p>A yellow pine, 14 ins. in diam., brs. S. 32° E., 79 lks. dist. marked T6N R30E S10 BT</p> <p>A yellow pine, 12 ins. in diam., brs. S. 51° W., 69 lks. dist. marked T6N R30E S9 BT</p> <p>A yellow pine, 20 ins. in diam., brs. N. 54° W., 63 lks. dist. marked T6N R30E S4 BT</p> <p>Land, mountainous and rolling. Soil, rocky, 4th rate. Timber, yellow pine, spruce, fir, aspen, oak and juniper. Undergrowth, scrub oak, thorn brush, and manzanita.</p> <hr/> <p>From the cor. of secs. 2, 3, 10 and 11, S. 89° 26' W., on true line, bet. secs. 3 and 10. Over rolling land, thru dense timber and scattering undergrowth. Desc. gradually over S. and SW. slopes.</p> <p>7.70 Road, brs. NE. and SW.</p> <p>23.40 Fence, brs. N. and S. Leave timber, brs. N. and S.</p> <p>37.00 Ascend gradually over NE. slope to $\frac{1}{4}$ sec. cor.</p> <p>39.20 Enter timber, brs. N. and S.</p> <p>39.23 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 3 and 10, marked on brass cap,</p> $\frac{1}{4} \begin{array}{c} S 3 \\ S 10 \\ 1925 \end{array}$ <p>from which</p> <p>A yellow pine, 22 ins. in diam., brs. N. 15° W., 45 lks. dist. marked $\frac{1}{4}$ S3 BT</p> <p>A yellow pine, 8 ins. in diam., brs. S. 47° W., 45 lks. dist., marked $\frac{1}{4}$ S10 BT</p> <p>No trace of the original $\frac{1}{4}$ sec. cor. can be found in this vicinity.</p> <p>Ascend gradually over NE. slope</p> <p>47.60 Spur, slopes NW. Enter mountainous land. Descend 266 ft. over SW. slope</p> <p>70.00 Wash, with stream of water, 2 lks. wide, 2 ins. deep, course SW. Ascend 30 ft. over SE. slope</p> <p>73.00 Point of spur, slopes SW. Desc. 136 ft. over W. slope to</p> <p>73.46 Intersect the cor. of secs. 3, 4, 9, and 10. Land, rolling and mountainous. Soil, rocky, 4th rate. Timber, yellow pine, fir, spruce, aspen and oak. Undergrowth, scrub oak, manzanita and thorn brush.</p> <hr/> <p>From the cor. of secs. 3 and 4 on the N. bdy. of the Tp., described in Book "G" of this group, S. 18° 31' E., on true line, bet. secs. 3 and 4 (N. $\frac{1}{2}$) Over level bottom land, bearing NE. and SW., thru scattering timber and undergrowth.</p> <p>0.50 Wash, 60 lks. wide, banks 6 ft. high, containing stream of water, 15 lks. wide, 2 ins. deep, course SW.</p> <p>6.00 Leave level bottom land and enter mountainous land, dense timber and undergrowth. Ascend 649 ft. over NW. slope to</p> <p>46.26 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 3 and 4, which is a lava stone, 6x16x24 ins., marked $\frac{1}{4}$ on W. face, and set in a mound of stone. No bearing trees. Reconstruct this cor. monument as follows: Remove the mound of stone and in center of its position reset old cor. stone 16 ins. in the ground and alongside same set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 3 and 4, marked on brass cap</p> $\frac{1}{4} \begin{array}{c} S 4 \\ S 3 \\ 1925 \end{array}$ <p>from which</p>
--------	--

chains
 A yellow pine, 10 ins. in diam., brs. S. 65° E., 22 lks. dist.,
 marked $\frac{1}{4}$ S3 BT
 A yellow pine, 10 ins. in diam., brs. S. 77° W., 60 lks. dist.,
 marked $\frac{1}{4}$ S4 BT
 Thence
 S. 2° 42' W., on true line, bet. secs. 3 and 4 (S. $\frac{1}{2}$)
 Over mountainous land, thru dense timber and undergrowth.
 Ascend 80 ft. over N. slope to
 4.50 N. edge of top of ridge, brs. E. and W. Thence across
 nearly level top of ridge.
 6.00 S. edge of top of ridge, brs. NW. and SE. Enter mountainous
 land. Descend 426 ft. over SW. and W. slopes to
 38.32 Intersect the cor. of secs. 3, 4, 9 and 10.
 Land, level and mountainous.
 Soil, gravelly, 3rd rate in N. 6 chs.; remainder, rocky
 4th rate.
 Timber, yellow pine, spruce, fir, aspen and juniper.
 Undergrowth, sagebrush, broomweed, scrub oak, thorn brush
 and manzanita.

 From the cor. of secs. 4, 5, 32 and 33 on the S. bdy. of the
 Tp., reestablished in 1916, which is an iron post, 2 ins.
 in diam., projecting 12 ins. above ground, firmly set,
 properly marked on brass cap and witnessed by four
 properly marked bearing trees, one each NE. SE., SW.
 and NW. of cor.,
 N. 0° 1' W., on true line, bet. secs. 32 and 33.
 Over mountainous land, thru dense timber and undergrowth.
 Ascend 157 ft. over SW. slope to
 12.50 Rim of bench, brs. NW. and SE. Thence over nearly level land
 on bench. Ascend gradually to
 36.89 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins.
 in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs.
 32 and 33, marked on brass cap



from which
 A yellow pine, 16 ins. in diam., brs. S. 81° E., 63 lks. dist.,
 marked $\frac{1}{4}$ S33 BT
 A yellow pine, 18 ins. in diam., brs. N. 16° W., 157 lks.
 dist., marked $\frac{1}{4}$ S32 BT
 No trace of the original $\frac{1}{4}$ sec. cor. can be found in this
 vicinity.
 Continue over nearly level land on bench, thru scattering
 timber and dense undergrowth.
 Ascend gradually to
 73.78 Intersect the original cor. of secs. 28, 29, 32 and 33, which
 is a lava stone 8x24x30 ins., marked with 4 notches on
 E. face and 1 notch on S. face, set in a mound of stone,
 and witnessed by one bearing tree:
 A yellow pine, 32 ins. in diam., N. 38° E., 37 lks. dist.,
 marked T6N R30E S28 BT
 No trace of the original SW. bearing tree can be found.
 Reconstruct this cor. monument as follows:
 Remove old mound of stone and in center of its position,
 reset old cor. stone, 20 ins. in the ground and alongside
 same set an iron post, 3 ft. long, 2 ins. in diam., 24 ins.
 in the ground, for cor. of secs. 28, 29, 32 and 33, marked
 on brass cap



No other bearing trees available.
 Land, mountainous and nearly level.

44 Resurvey of Subdivision lines of Township 6 North, Range 30 East

chains	<p>Soil, rocky, 4th rate. Timber, yellow pine, fir, spruce and aspen. Undergrowth, broomweed, scrub oak, manzanita and thorn brush</p> <hr/> <p>From the cor. of secs. 27, 28, 33 and 34, N. 89° 35' W., on true line, bet. secs. 28 and 33 (E. 1/2) Over gently rolling land on bench, thru dense timber and undergrowth. Descend slightly over S. slope to Rim of bench, brs. N. and S. Enter mountainous land. Descend 60 ft. over W. slope</p> <p>26.00</p> <p>35.10 Wash, 10 lks. wide, course S. Ascend 76 ft. over SE. slope to</p> <p>39.32 Intersect the original 1/4 sec. cor. of secs. 28 and 33, which is an outcropping boulder exposed 6x6x6 ft., marked 1/4 on top, and witnessed by a mound of stone N. of cor. and one bearing tree: A yellow pine, 10 ins. in diam., N. 55° E., 78 lks. dist., marked 1/4 S BT</p> <p>Reconstruct this cor. monument as follows: Alongside old cor. stone, set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for 1/4 sec. cor. of secs. 28 and 33, marked on brass cap,</p> <div style="text-align: center;"> $\begin{array}{r} \frac{1}{4} S 28 \\ \frac{1}{4} S 33 \\ 1925 \end{array}$ </div> <p>In addition to the old bearing tree described above, establish one new bearing tree: A spruce, 14 ins. in diam., brs. S. 6 1/2° E., 82 lks. dist., marked 1/4 S33 BT</p> <p>Thence N. 87° 35' W., on true line, bet. secs. 28 and 33 (W. 1/2) Over mountainous land, thru dense timber and undergrowth. Ascend 38 ft. over SE. slope</p> <p>1.90 Trail, brs. NE. and SW.</p> <p>3.50 Rim of bench, brs. N. and S. Thence over nearly level land on bench, thru scattering timber and undergrowth.</p> <p>40.25 Intersect the cor. of secs. 28, 29, 32 and 33. Land, gently rolling, mountainous and nearly level. Soil, rocky, 4th rate. Timber, yellow pine, spruce, and aspen. Undergrowth, scrub oak, thorn brush and manzanita.</p> <hr/> <p>N. 0° 29' E., on true line, bet. secs. 28 and 29 Over nearly level land on bench, thru scattering timber and undergrowth. Asc. slightly to</p> <p>2.90 Leave bench. Enter mountainous land. Ascend 91 ft. over S. slope to</p> <p>10.00 Rim of mesa, brs. E. and W. Thence over nearly level land on mesa, thru dense undergrowth.</p> <p>25.85 Trail, brs. NE. and SW.</p> <p>31.78 Trail, brs. NW. and SE.</p> <p>39.58 1/2 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post and raise a mound of stone around post, for reestablished 1/4 sec. cor. of secs. 28 and 29, marked on brass cap</p> <div style="text-align: center;"> $\begin{array}{c} \frac{1}{4} \\ S29 S28 \\ 1925 \end{array}$ </div> <p>No suitable bearing trees available. Continue over nearly level land on mesa, thru scattering timber and undergrowth.</p> <p>53.90 Drift fence, brs. NW. and SE.</p> <p>55.00 Rim of mesa, brs. E. and W. Leave mesa and enter mountainous land, dense timber and undergrowth. Descend 529 ft. over N. and NW. slopes to</p>
--------	---

chains
79.17

(Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 20, 21, 28 and 29, marked on brass cap

T6N	R30E
S20	S21
S29	S28

1925

from which

A spruce, 14 ins. in diam., brs. N. 37° E., 45 lks. dist., marked T6N R30E S21 BT

A spruce, 8 ins. in diam., brs. S. 53° E., 20 lks. dist., marked T6N R30E S28 BT

A spruce, 26 ins. in diam., brs. S. 48° W., 90 lks. dist., marked T6N R30E S29 BT

A spruce, 19 ins. in diam., brs. N. 70° W., 70 lks. dist., marked T6N R30E S20 BT

No trace of the original sec. cor. can be found in this vicinity.

Land, nearly level and mountainous.

Soil, rocky, 4th rate.

Timber, yellow pine, spruce, fir, and aspen.

Undergrowth, scrub oak, thorn brush and manzanita,

5.00
39.43

From the cor. of secs. 21, 22, 27 and 28,

N. 88° 21' W., on true line, bet. secs. 21 and 28.

Over gently rolling land on mesa, thru dense timber and undergrowth. Ascend slightly over E. slope to

Thence over level land continuing across mesa.

(Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 21 and 28, marked on brass cap

$\frac{1}{4}$ S21	
$\frac{1}{4}$ S28	

1925

from which

A spruce, 16 ins. in diam., brs. S. 71° E., 108 lks. dist., marked $\frac{1}{4}$ S28 BT

A yellow pine, 14 ins. in diam., brs. N. 80° W., 120 lks. dist., marked $\frac{1}{4}$ S21 BT

No trace of the original $\frac{1}{4}$ sec. cor. can be found in this vicinity.

Continue over level land on mesa, thru dense timber and undergrowth.

48.00 Rim of mesa, brs. N. and S. Leave mesa. Enter mountainous land. Descend 556 ft. over W. and NW. slopes to

78.86 Intersect the cor. of secs. 20, 21, 28 and 29.

Land, gently rolling, level and mountainous.

Soil, rocky, 4th rate.

Timber, yellow pine, fir, spruce and aspen.

Undergrowth, scrub oak, thorn brush and manzanita.

1.00
38.00

N. 0° 45' W., on true line, bet. secs. 20 and 21.

Over mountainous land, thru dense timber and undergrowth. Descend 40 ft. over NW. slope

Wash, 20 lks. wide, course W. Ascend 741 ft. over SW. slope to

Rim of mesa, brs. NW. and SE. Thence over level land on mesa, near rim of same.

39.58 $\frac{1}{2}$ (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 20 and 21, marked on brass cap

$\frac{1}{4}$	
S20	S21

1925

46 Resurvey of Subdivision Lines of Township 6 North, Range 30 East

	chains	from which								
		A spruce, 6 ins. in diam., brs. N. 38° E., 9 lks. dist., marked $\frac{1}{4}$ S 21 BT								
		A spruce, 6 ins. in diam., brs. S. 42° W., 33 lks. dist., marked $\frac{1}{4}$ S 20 BT								
		No trace of original $\frac{1}{4}$ sec. cor. can be found in this vicinity.								
		Continue over level land on mesa, thru dense timber and undergrowth.								
	54.50	Leave level and enter rolling land. Descend gradually over NW. slope								
	66.00	Head of draw, course NW. Descend gradually over W. slope to								
	79.17	Intersect the original cor. of secs. 16, 17, 20 and 21, which is an outcropping boulder exposed 3x4x5 ft., marked with 4 notches on each of S. and E. faces and witnessed by one bearing tree:								
		A spruce, 10 ins. in diam., N. 87 $\frac{1}{2}$ ° W., 34 lks. dist., marked T6N R30E S17 BT								
		Reconstruct this cor. monument as follows:								
		Alongside old cor. stone, set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 16, 17, 20 and 21, marked on brass cap								
		<table border="1"> <tbody> <tr> <td>T6N</td> <td>R30E</td> </tr> <tr> <td>S17</td> <td>S16</td> </tr> <tr> <td>S20</td> <td>S21</td> </tr> <tr> <td colspan="2">1925</td> </tr> </tbody> </table>	T6N	R30E	S17	S16	S20	S21	1925	
T6N	R30E									
S17	S16									
S20	S21									
1925										
		In addition to the old bearing tree, establish four new bearing trees:								
		A fir, 20 ins. in diam., brs. N. 28° E., 28 lks. dist., marked T6N R30E S16 BT								
		A spruce, 20 ins. in diam., brs. S. 60° E., 30 lks. dist., marked T6N R30E S21 BT								
		A yellow pine, 20 ins. in diam., brs. S. 48 $\frac{1}{2}$ ° W., 71 lks. dist., marked T6N R30E S20 BT								
		A yellow pine, 20 ins. in diam., brs. N. 86 $\frac{1}{2}$ ° W., 34 lks. dist., marked T6N R30E S17 BT								
		Land, mountainous, level and rolling. Soil, rocky, 4th rate. Timber, yellow pine, fir, spruce and aspen. Undergrowth, scrub oak, thorn brush and manzanita.								

		From the cor. of secs. 15, 16, 21 and 22, N. 87° 55' W., on true line, bet. secs. 16 and 21.								
	5.70	Over gently rolling land on top of spur sloping NE., thru dense timber and undergrowth. Asc. slightly over N. slope Edge of top of spur, brs. NE. and SW. Enter mountainous land. Descend 217 ft. over NW. slope								
	16.45	Wash, 20 lks. wide, course NE. Asc. 563 ft. over E. slope to								
	39.71	(Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post and raise a mound of stone around post, for reestablished $\frac{1}{4}$ sec. cor. of secs. 16 and 21, marked on brass cap								
		<table border="1"> <tbody> <tr> <td>$\frac{1}{4}$ S 16</td> </tr> <tr> <td>$\frac{1}{4}$ S 21</td> </tr> <tr> <td>1925</td> </tr> </tbody> </table>	$\frac{1}{4}$ S 16	$\frac{1}{4}$ S 21	1925					
$\frac{1}{4}$ S 16										
$\frac{1}{4}$ S 21										
1925										
		No trees suitable for bearing trees available. No trace of original $\frac{1}{4}$ sec. cor. can be found in this vicinity.								
	60.00	Ascend 304 ft. over E. slope to Rim of mesa, brs. N. and S. Thence over rolling land on mesa. Descend 110 ft. over W. slope to								
	79.42	Intersect the cor. of secs. 16, 17, 20 and 21.								
		Land, rolling and mountainous. Soil, rocky, 4th rate. Timber, yellow pine, fir, spruce and aspen. Undergrowth, scrub oak, thorn brush and manzanita.								

chains

N. $4^{\circ}32'E.$, on true line, bet. secs. 16 and 17.
Over heavily rolling land on mesa, thru dense timber and undergrowth. Ascend 124 ft. over SW. slope.
13.00 Ridge, brs. NW. and SE. Descend 204 ft. over NE. slope to
39.56 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 16 and 17, marked on brass cap

$$\frac{1}{4}$$

S17	S16
-----	-----

1925

from which

A fir, 14 ins. in diam., brs. S. $63^{\circ}E.$, 84 lks. dist.
marked $\frac{1}{4}$ S16 BT

A spruce, 10 ins. in diam., brs. N. $84^{\circ}W.$, 23 lks. dist.,
marked $\frac{1}{4}$ S17 BT

No trace of the original $\frac{1}{4}$ sec. cor. can be found in this vicinity.

48.40 Descend 65 ft. over NE. slope
Center of draw, 2.00 chs. wide, course NW.

64.40 Ascend 175 ft. over SW. slope

Rim of mesa, brs. NW. and SE. Leave mesa. Enter mountainous land. Descend 189 ft. over NE. slope

72.30 Head of wash, 10 lks. wide, course NE.

Ascend 17 ft. over SE. slope

77.10 Spur, slopes E. Descend 30 ft. over NE. slope to

79.11 (Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 8, 9, 16 and 17, marked on brass cap

T6N	R30E
S 8	S 9
S17	S16

1925

from which

A yellow pine, 12 ins. in diam., brs. N. $27^{\circ}E.$, 50 lks. dist.,
marked T6N R30E S9 BT

A fir, 8 ins. in diam., brs. S. $72^{\circ}E.$, 30 lks. dist.,
marked T6N R30E S16 BT

A fir, 10 ins. in diam., brs. S. $14^{\circ}W.$, 46 lks. dist.,
marked T6N R30E S17 BT

A fir, 14 ins. in diam., brs. N. $21^{\circ}W.$, 21 lks. dist.,
marked T6N R30E S8 BT

No trace of the original sec. cor. can be found in this vicinity.

Land, heavily rolling and mountainous.

Soil, rocky, 4th rate.

Timber, yellow pine, fir, spruce and aspen.

Undergrowth, scrub oak, manzanita and thorn brush.

From the cor. of secs. 9, 10, 15 and 16,
S. $88^{\circ}9'W.$, on true line, bet. secs. 9 and 16
Over mountainous land, thru dense timber and undergrowth.
Descend 99 ft. over NW. slope

0.95 Telephone line, brs. NE. and SW.

4.10 Wash, 10 lks. wide, course SW. Asc. 276 ft. over SE. slope

6.60 Trail, brs. NE. and SW.

24.80 Spur, slopes SW. Desc. 212 ft. over W. slope to $\frac{1}{4}$ sec. cor.

41.00 Telephone line, brs. NW. and SE.

43.91 $\frac{1}{2}$ (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, supported in a mound of stone, for reestablished $\frac{1}{4}$ sec. cor. of secs. 9 and 16, marked on brass cap

$\frac{1}{4}$	SC
S17	S16

1925

from which

48 Resurvey of Subdivision lines of Township 6 North, Range 30 East

chains	<p>A yellow pine, 26 ins. in diam., brs. N. 40° E., 55 lks. dist. marked $\frac{1}{4}$ S9 BT</p> <p>A yellow pine, 26 ins. in diam., brs. S. 30° W., 9 lks. dist. marked $\frac{1}{4}$ S16 BT</p> <p>No trace of the original $\frac{1}{4}$ sec. cor. can be found in this vicinity.</p> <p>Enter gently rolling land. Descend 20 ft. over W. slope Highway, from Alpine to Nutrioso, brs. N. and S.</p>
44.30	Highway, from Alpine to Nutrioso, brs. N. and S.
45.40	Nutrioso Creek, with stream of water, 30 lks. wide, 6 ins. deep, course NW. Asc. 1019 ft. over steep NE. slope to sec. cor.
55.00	Foot of cliff, 50 ft. high, bearing NW. and SE., facing NE.
55.50	Top of same cliff.
87.83	Intersect the cor. of secs. 8, 9, 16 and 17.
	<p>Land, mountainous and rolling.</p> <p>Soil, rocky, 4th rate.</p> <p>Timber, yellow pine, Fir, spruce and aspen.</p> <p>Undergrowth, scrub oak, thorn brush and manzanita.</p>
	<p>N. 9° 8' E., on true line, bet. secs. 8 and 9 (S. 2)</p> <p>Over mountainous land, thru dense timber and undergrowth. Across cliffs, bearing NW. and SE., facing NE. Descend 400 ft. to</p>
10.00	Leave cliffs. Descend 450 ft. over steep NE. slope to
39.94	Intersect the original $\frac{1}{4}$ sec. cor. of secs. 8 and 9, which is a stone 30x30x24 ins. above ground, marked $\frac{1}{4}$ on top, firmly set, and witnessed by two bearing trees:
	A yellow pine, 22 ins. in diam., S. 73° E., 9 lks. dist., marked $\frac{1}{4}$ S BT and
	Butt of a dead and fallen pine, S. 68° W., 9 lks. dist., marked $\frac{1}{4}$ S BT
	Reconstruct this cor. monument as follows:
	Alongside old cor. stone, set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. of secs. 8 and 9, marked on brass cap
	$\frac{1}{4}$ S8 S9 1925
	In addition to the old bearing trees described above, establish two new bearing trees:
	A yellow pine, 10 ins. in diam., brs. N. 30° E., 48 lks. dist. marked $\frac{1}{4}$ S9 BT
	A cedar, 10 ins. in diam., brs. S. 60° W., 68 lks. dist., marked $\frac{1}{4}$ S8 BT
	Thence
	N. 0° 37' W., on true line, bet. secs. 8 and 9 (N. $\frac{1}{2}$)
	Over mountainous land, thru dense timber and undergrowth. Ascend 36 ft. over SE. slope
2.50	Point of spur, slopes E. Desc. 64 ft. over NE. slope
5.00	Wash, 10 lks. wide, course E. Asc. 44 ft. over S. slope
7.00	Spur, slopes NE. Descend 169 ft. over NW. slope
23.20	Wash, 20 lks. wide, course NE. Enter rolling land. Ascend 11 ft. over SE. slope
32.00	Spur, slopes NE. Descend 61 ft. over N. slope to
39.60	Intersect the original cor. of secs. 4, 5, 8 and 9, which is a stone 8x10x14 ins. above ground, marked with 5 notches on S. face and 4 notches on E. face, firmly set, and witnessed by two bearing trees:
	A yellow pine, 20 ins. in diam., N. 13° E., 98 lks. dist., marked T6N R30E S4 BT and
	A yellow pine, 30 ins. in diam., S. 8° W., 31 lks. dist., marked T6N R30E S8 BT
	Reconstruct this cor. monument as follows:
	Alongside old cor. stone, set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, supported in a mound of stone, for cor. of secs. 4, 5, 8 and 9, marked on brass cap

chains

T6N R30E
 $\frac{S 5}{S 8} \frac{S 4}{S 9}$
 1925

In addition to the old bearing trees, establish four new bearing trees:

- A yellow pine, 14 ins. in diam., brs. N. 43° E., 136 lks. dist., marked T6N R30E S4 BT
- A yellow pine, 20 ins. in diam., brs. S. 82° E., 78 lks. dist., marked T6N R30E S9 BT
- A yellow pine, 20 ins. in diam., brs. S. 54° W., 76 lks. dist., marked T6N R30E S8 BT
- A yellow pine, 20 ins. in diam., brs. N. 74° W., 180 lks. dist., marked T6N R30E S5 BT

Land, mountainous and rolling.
 Soil, rocky, 4th rate.
 Timber, yellow pine, fir, spruce and aspen.
 Undergrowth, scrub oak, thorn brush and manzanita.

- From the cor. of secs. 3, 4, 9 and 10, S. 89° 42' W., on true line, bet. secs. 4 and 9. Over mountainous land, thru dense timber and undergrowth. Descend 299 ft. over SW. slope
- 20.30 Wash, 20 lks. wide, with stream of water, 15 lks. wide, 3 ins. deep, course NW. Ascend 56 ft. over NE. slope
- 23.70 Fence, brs. NE. and S. 85° W.
- 33.00 Spur, slopes NW. Descend 91 ft. over W. slope to
- 40.84 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for reestablished sec. cor. of secs. 4 and 9, marked on brass cap

$\frac{1}{4} \frac{S 4}{S 9}$
 1925

- from which
- A cedar, 20 ins. in diam., brs. N. 7° W., 25 lks. dist., marked $\frac{1}{4}$ S4 BT
- A yellow pine, 14 ins. in diam., brs. S. 13° W., 48 lks. dist., marked $\frac{1}{4}$ S9 BT
- No trace of the original $\frac{1}{4}$ sec. cor. can be found in this vicinity.
- Descend 104 ft. over W. slope to
- 46.00 Fence, brs. N. 5° W. and S. 30° E. at foot of descent. Leave mountainous land, timber and undergrowth, and enter level cultivated bottom land.
- 52.10 Fence, brs. N. 70° E. and S. 70° W.
- 54.90 Nutrioso Creek, with stream of water, 20 lks. wide, 3 ins. deep, course NW.
- 59.00 Leave cultivated land and enter timber and undergrowth, brs. N. and S.
- 61.00 Log fence, brs. N. 10° W. and S. 10° E. Enter rolling land. Ascend 32 ft. over NE. and N. slopes to sec. cor.
- 67.60 Highway, from Alpine to Nutrioso, brs. N. and S.
- 70.80 Telephone line, brs. NW. and SE.
- 81.68 Intersect the cor. of secs. 4, 5, 8 and 9.

Land, mountainous, level and rolling.
 Soil, rocky, 4th rate.
 Timber, yellow pine, spruce, aspen and juniper.
 Undergrowth, scrub oak, thorn brush and manzanita.

- From the cor. of secs. 4, 5, 32 and 33, on the N. bdy, of the Tp. described in Book "G" of this group, S. 6° 36' E., on true line, bet. secs. 4 and 5. Over mountainous land, thru dense timber and undergrowth. Descend 417 ft. over W. and SW. slopes to
- 21.75 Wash, 10 lks. wide, course SW. Desc. gradually over SW. slope

50 Resurvey of Subdivision lines of Township 6 North, Range 30 East

chains	
36.05	Wash, near head, course SW. Ascend 34 ft. over NW. slope.
39.75	Point of sour, slopes SW. Desc. 57 ft. over S. slope to
41.00	Foot of slope, brs. NW. and SE. Leave mountainous land and timber, and enter level bottom land.
41.25	(Proportional dist.) True point for reestablishment of the $\frac{1}{4}$ sec. cor. of secs. 4 and 5 falls in Highway, from Alpine to Nutrioso, where a cor. monument would be subject to destruction by traffic, therefore at
41.35	Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for witness cor. to reestablished $\frac{1}{4}$ sec. cor. of secs. 4 and 5, marked on brass cap
	$\frac{1}{4}$ S 5 S 4 W C 1925
	from which
	A juniper, 20 ins. in diam., brs. N. 60° E., 237 lks. dist., marked WC $\frac{1}{4}$ S4 BT
	A pinion, 8 ins. in diam., brs. N. 25° W., 111 lks. dist., marked WC $\frac{1}{4}$ S5 BT
41.40	Fence, brs. NW. and SE. Enter cultivated land, bet. this fence and Nutrioso Creek.
54.86	Nutrioso Creek, with stream of water, 15 lks. wide, 6 ins. deep, course NW., bet. banks 8 ft. high. Continue over level bottom land to
55.75	Leave level bottom land, and enter rolling land, dense timber and undergrowth. Ascend 171 ft. over N. slope to sec. cor. of
64.35	Log fence, brs. NW. and SE.
67.10	Telephone line, brs. NW. and SE.
83.75	Intersect the cor. of secs. 4, 5, 8 and 9.
	Land, mountainous, level and rolling. Soil, in bottom land, sandy loam, 2nd rate; elsewhere rocky, 4th rate. Timber, yellow pine, juniper, oak and pinion. Undergrowth, sagebrush, broomweed, scrub oak and thorn brush.

	From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., reestablished in 1916, which is an iron post, 2 ins. in diam., projecting 4 ins. above a mound of stone in which it is firmly set, properly marked on brass cap and witnessed by five properly marked bearing trees, two SE., and one each NE., SW. and NW. of cor., N. 1° 00' W., on true line, bet. secs. 31 and 32. Over rolling land, thru dense timber and undergrowth. Ascend 57 ft. over S. slope
13.00	Spur, slopes SE. asc. gradually over E. slope to
26.00	Wash, 20 lks. wide, course SE. Enter mountainous land. Ascend 108 ft. over SW. slope to
37.35	(Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 31 and 32, marked on brass cap
	$\frac{1}{4}$ S 31 S 32 1925
	from which
	A yellow pine, 14 ins. in diam., brs. S. 88° E., 7 lks. dist., marked $\frac{1}{4}$ S32 BT
	A yellow pine, 12 ins. in diam., brs. S. 49° W., 26 lks. dist., marked $\frac{1}{4}$ S31 BT
	No trace of original $\frac{1}{4}$ sec. cor. can be found.
43.00	Ascend 110 ft. over SW. slope Spur, slopes SE. Enter rolling land.

chains Descend 43 ft. over NE. slope
 58.80 Enter aspen thicket, brs. E. and W.
 66.70 Wash, 20 lks. wide, course SE. Leave aspen thicket, brs. E.
 and W. Ascend 36 ft. over S. slope to
 72.00 Rim of bench, brs. NW. and SE. Thence over nearly level
 land on bench.
 74.70 Intersect the original cor. of secs. 29, 30, 31 and 32, which
 is a lava stone 12x16x10 ins. above ground, marked with
 1 notch on S. face and 5 notches on E. face and witness-
 ed by two bearing trees:
 A yellow pine, 16 ins. in diam., N. 69° E., 13 lks. dist.,
 marked T6N R30E S29 BT and
 A yellow pine, 12 ins. in diam., S. 25° W., 16 lks. dist.,
 marked T6N R30E S31 BT
 Reconstruct this cor. monument as follows:
 Alongside old cor. stone, set an iron post, 3 ft. long, 2 ins.
 in diam., 24 ins. in the ground, for cor. of secs. 29, 30,
 31 and 32, marked on brass cap

T6N	R30E
S30	S29
S31	S32

1925

In addition to the old bearing trees described above,
 establish four new bearing trees:

- A yellow pine, 20 ins. in diam., brs. N. 63° E., 66 lks.
 dist., marked T6N R30E S29 BT
- A yellow pine, 18 ins. in diam., brs. S. 31° E., 36 lks.
 dist., marked T6N R30E S32 BT
- A yellow pine, 14 ins. in diam., brs. S. 75° W., 74 lks.
 dist., marked T6N R30E S31 BT
- A yellow pine, 30 ins. in diam., brs. N. 56° W., 84 lks.
 dist., marked T6N R30E S30 BT

Land, rolling, mountainous and nearly level.

Soil, rocky, 4th rate.

Timber, yellow pine, fir, spruce and aspen.

Undergrowth, scrub oak, thorn brush and manzanita.

From the cor. of secs. 28, 29, 32 and 33,
 N. 88° 17' W., on true line, bet. secs. 29 and 32 (E. $\frac{1}{2}$)
 Over nearly level land on bench, thru scattering timber
 and undergrowth.
 14.00 Rim of bench, brs. N. and S. Leave bench. Enter mountain-
 ous land, dense timber and undergrowth.
 Descend 262 ft. over W. slope
 27.00 Wash, 20 lks. wide, course S. Asc. 144 ft. over SE. slope to
 39.36 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 29 and 32,
 which is a lava stone 6x18x18 ins., marked $\frac{1}{4}$ on N. face,
 firmly set in a mound of stone and witnessed by one
 bearing tree:
 A dead and fallen pine, 12 ins. in diam., S. 25° E., 31 lks.
 dist., marked $\frac{1}{4}$ S BT
 Reconstruct this cor. monument as follows:
 Remove the mound of stone and in center of its position
 reset old cor. stone 12 ins. in the ground, and alongside
 same set an iron post, 3 ft. long, 1 in. in diam., 24 ins.
 in the ground, for $\frac{1}{4}$ sec. cor. of secs. 29 and 32, marked
 on brass cap

$\frac{1}{4}$	S 29
	S 32
	1925

from which

- A yellow pine, 14 ins. in diam., brs. N. 20° W., 47 lks.
 dist., marked $\frac{1}{4}$ S29 BT
- A yellow pine, 12 ins. in diam., brs. S. 65° W., 45 lks.
 dist., marked $\frac{1}{4}$ S32 BT

Thence

52 Resurvey of Subdivision lines of Township 6 North, Range 30 East

chains	N. 89° 28' W., on true line, bet. secs. 29 and 32 (W. $\frac{1}{4}$) Over mountainous land, thru dense timber and undergrowth. Ascend 50 ft. over SE. slope to
5.00	Rim of bench, brs. NE. and SW. Leave mountainous and enter nearly level land on bench. Ascend slightly over SE. and S. slopes to
40.22	Intersect the cor. of secs. 29, 30, 31 and 32. Land, nearly level and mountainous. Soil, rocky, 4th rate. Timber, yellow pine, spruce and aspen. Undergrowth, scrub oak, broomweed and thorn brush.

	From the cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., hereinbefore described, S. 85° 25' E., on true line, bet. secs. 30 and 31. Over mountainous land, thru dense timber and undergrowth. Ascend 36 ft. over W. slope
2.08	Fence, brs. N. and S.
4.00	W. edge of top of ridge, bearing N. and S. Thence across top of ridge.
5.00	E. edge of top of ridge, brs. N. and S. Descend 332 ft. over E. slope
28.80	Trail, brs. NW. and SE. Enter aspen thicket
31.40	Trail, brs. N. and S. 30° E.
37.00	Leave aspen thicket.
38.20	Wash, 10 lks. wide, course NW. Asc. 51 ft. over W. slope to
39.44	(Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 30 and 31, marked on brass cap
	$\frac{1}{4} \frac{S \ 30}{S \ 31}$ 1925
	from which A yellow pine, 16 ins. in diam., brs. N. 5° W., 64 lks. dist., marked $\frac{1}{4}$ S30 BT A yellow pine, 8 ins. in diam., brs. S. 31° W., 46 lks. dist., marked $\frac{1}{4}$ S31 BT No trace of the original $\frac{1}{4}$ sec. cor. can be found.
42.80	Ascend 222 ft. over W. slope At about 1 ch. N. of this point an old road turns from NW. to E.
46.00	Same old road, brs. NW. and SE.
56.60	Fence, brs. N. 15° E. and S. 15° W.
57.40	Rim of bench, brs. N. 15° E. and S. 15° W. Leave mountainous and enter nearly level land on bench. Ascend slightly over SW. and S. slopes to
79.38	Intersect the cor. of secs. 29, 30, 31 and 32. Land, mountainous and nearly level. Soil, rocky, 4th rate. Timber, yellow pine, spruce and aspen. Undergrowth, scrub oak, broomweed, thorn brush and manzanita.

	N. 1° 5' E., on true line, bet. secs. 29 and 30. Over nearly level land on bench, thru dense timber and undergrowth. Asc. slightly over S. slope to
2.46	Leave bench, brs. E. and W. Enter mountainous land. Ascend 450 ft. over S. slope
29.00	Ridge, brs. E. and W. Enter aspen thicket. Descend 240 ft. over N. slope to $\frac{1}{4}$ sec. cor.
30.00	Fence, brs. E. and W.
38.48	(Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, supported in a mound of stone, for reestablished $\frac{1}{4}$ sec. cor. of secs. 29 and 30, marked on brass cap

chains

$$\frac{1}{4}$$

S30	S29
-----	-----

1925

from which

An aspen, 4 ins. in diam., brs. N. 46° E., 30 lks. dist.,
marked $\frac{1}{4}$ S29 BTAn aspen, 4 ins. in diam., brs. S. 77° W., 15 lks. dist.,
marked $\frac{1}{4}$ S30 BTNo trace of original $\frac{1}{4}$ sec. cor. can be found.

Descend 917 ft. over NW. and W. slopes to

76.96 Intersect the original cor. of secs. 19, 20, 29 and 30, which

is a yellow pine tree, 16 ins. in diam., marked T6N R30E

S20 on NE. face, S19 on NW. face, S30 on SW. face, and

S29 on SE. face, and witnessed by two bearing trees:

An oak, 8 ins. in diam., N. 50° E., 7 lks. dist.,

marked T6N R30E S20 BT and

An oak, 5 ins. in diam., S. 13° E., 16 lks. dist.,

marked T6N R30E S29 BT

Reconstruct this cor. monument as follows;

Alongside old tree cor., set an iron post, 3 ft. long, 2 ins.

in diam., 24 ins. in the ground, for cor. of secs. 19, 20, 29

and 30, marked on brass cap

T6N R30E

S19 S20

S30 S29

1925

In addition to the old bearing trees described above,
establish four new bearing trees:A yellow pine, 6 ins. in diam., brs. N. 75° E., 30 lks.
dist., marked T6N R30E S20 BTA yellow pine, 16 ins. in diam., brs. S. 32½° E., 37 lks.
dist., marked T6N R30E S29 BTA spruce, 16 ins. in diam., brs. S. 40° W., 58 lks.
dist., marked T6N R30E S30 BTA yellow pine, 12 ins. in diam., brs. N. 20° W., 93 lks.
dist., marked T6N R30E S19 BT

Land, nearly level and mountainous.

Soil, rocky, 4th rate.

Timber, yellow pine, fir, spruce and aspen.

Undergrowth, scrub oak, manzanita and thorn brush.

From the cor. of secs. 20, 21, 28 and 29,

S. 89° 20' W., on true line, bet. secs. 20 and 29.

Over mountainous land, thru dense timber and undergrowth.

Descend 58 ft. over NW. slope

12.00 Wash, 10 lks. wide, course N. Ascend 100 ft. over NE. slope

30.70 Spur, slopes N. 20° W. Descend 161 ft. over W. slope to

39.59 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24
ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs.
20 and 29, marked on brass cap $\frac{1}{4}$ S 20

S 29

1925

from which

A spruce, 15 ins. in diam., brs. S. 5° W., 28 lks. dist.,
marked $\frac{1}{4}$ S29 BTA spruce, 14 ins. in diam., brs. N. 78° W., 41 lks. dist.,
marked $\frac{1}{4}$ S20 BTNo trace of original $\frac{1}{4}$ sec. cor. can be found.

Descend 28 ft. over W. slope

40.70 Wash, 5 lks. wide, course NW. Ascend 23 ft. over NE. slope

45.50 Spur, slopes N. Descend 85 ft. over W. slope

56.95 Wash, 5 lks. wide, course N. Ascend 34 ft. over E. slope

64.80 Spur, slopes N. Descend 75 ft. over W. slope

54 Resurvey of Subdivision lines of Township 6 North, Range 30 East

chains

72.40 Wash, 10 lks. wide, course N. Ascend 80 ft. over NE. slope
 76.70 Spur, slopes N. 20° W. Descend 41 ft. over W. slope to
 79.19 Intersect the cor. of secs. 19, 20, 29 and 30.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, yellow pine, fir, spruce and aspen.

Undergrowth, scrub oak, manzanita and thorn brush.

 From the cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the
 1/4 Sp., hereinbefore described, on the true line, bet. secs. 19 and 30.

S. 86° 20' E., on true line, bet. secs. 19 and 30.
 Over mountainous land, thru dense timber and undergrowth.
 Ascend 44 ft. over SW. slope

7.00 Ridge, brs. N. and S. Descend 722 ft. over NE. slope to
 43.24 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in
 diam., 24 ins. in the ground, for reestablished 1/4 sec.
 cor. of secs. 19 and 30, marked on brass cap

1/4 S 19
 S 30
 1925

from which

A yellow pine, 16 ins. in diam., brs. N. 42° E., 53 lks. dist.,
 marked 1/4 S 30 BT

A yellow pine, 28 ins. in diam., brs. S. 39° W., 29 lks. dist.,
 marked 1/4 S 19 BT

No trace of the original 1/4 sec. cor. can be found.

56.50 Descend 97 ft. over NE. slope
 Old road, brs. NE. and SW.
 57.70 Creek, with stream of water, 15 lks. wide, 6 ins. deep,
 course NE. Ascend 75 ft. over NW. slope
 80.00 Spur, slopes N. Descend 32 ft. over NE. slope
 84.50 Wash, 10 lks. wide, course NW. from S.
 Ascend 18 ft. over W. slope to
 87.47 Intersect the cor. of secs. 19, 20, 29 and 30.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, yellow pine, fir, spruce and aspen.

Undergrowth, scrub oak, thorn brush and manzanita.

 N. 0° 2' E., on true line, bet. secs. 19 and 20. (5 1/2)

Over mountainous land, thru dense timber and undergrowth.
 Descend 54 ft. over W. slope to

8.50 Spur, slopes NW. Desc. 165 ft. over NE. slope to
 21.30 Bend in small creek, with stream of water, 3 lks. wide, 2 ins.
 deep, course NE. from SE. Enter rolling land.
 Descend gradually over NE. slope to
 25.60 Same creek, course NW. Desc. gradually over NW. slope to
 32.60 Creek, with stream of water, 30 lks. wide, 2 ins. deep, course
 NE. Descend gradually over NE. slope to
 40.09 Intersect the original 1/4 sec. cor. of secs. 19 and 20, which
 is a yellow pine tree, 16 ins. in diam., marked 1/4 S on W.
 face, and witnessed by one bearing tree:
 A yellow pine, 26 ins. in diam., S. 61° W., 36 lks. dist.,
 marked 1/4 S BT

The record description of this cor. monument (stone, witness-
 ed by mound of stone and no bearing trees) was evidently
 in error.

Reconstruct this cor. monument as follows:

Alongside tree cor., set an iron post, 3 ft. long, 1 in. in
 diam., 24 ins. in the ground, for 1/4 sec. cor. of secs. 19 and
 20, marked on brass cap,

1/4 S 19 | S 20
 1925

chains	<p>In addition to the old bearing tree, establish two new bearing trees: A yellow pine, 30 ins. in diam., brs. S. 70° E., 43 lks. dist., marked $\frac{1}{4}$ S20 BT A yellow pine, 26 ins. in diam., brs. S. 72° W., 120 lks. dist., marked $\frac{1}{4}$ S19 BT</p> <p>Thence N. 0° 14' E., on true line, bet. secs. 19 and 20 (N. $\frac{1}{2}$) Over rolling land, thru dense timber and undergrowth. Descend 104 ft. over NE. slope</p> <p>18.50 Old road, brs. NE. and SW. 25.50 Creek, with stream of water, 20 lks. wide, 3 ins. deep, course N. 20° W. Leave timber and undergrowth. Ascend gradually over SW. slope</p> <p>31.30 Old road, brs. N. 20° W. and S. 20° E. 36.00 Leave rolling and enter mountainous land, dense timber and undergrowth. Asc. 40 ft. over SW. slope to</p> <p>40.47 Intersect the cor. of secs. 17, 18, 19 and 20, which is a stone, 8x10x12 ins., marked with 3 notches on S. face and 1 notch on E. face and set in a mound of stone. No accessories. This stone has been broken and the fragment bearing the other notches of the E. face is lost.</p> <p>The record of this cor. monument describes a wood post marked, notched, set in ground and mound of earth, and witnessed by pits in each sec., but diligent search in this vicinity fails to reveal any trace of a monument agreeing with such description, therefore accept the above described stone as marking the original cor. point.</p> <p>Reconstruct this cor. monument as follows: Remove the mound of stone and in center of its position, reset old cor. stone on bedrock, and alongside same, set an iron post, 3 ft. long, 2 ins. in diam., on bedrock, and raise a mound of stone around post, for cor. of secs. 17, 18, 19 and 20, marked on brass cap</p> <div style="text-align: center;"> <table border="1"> <tr><td>T6N</td><td>R30E</td></tr> <tr><td>S18</td><td>S17</td></tr> <tr><td>S19</td><td>S20</td></tr> <tr><td colspan="2">1925</td></tr> </table> </div> <p>from which A yellow pine, 20 ins. in diam., brs. N. 45° E., 144 lks. dist., marked T6N R30E S17 BT A yellow pine, 20 ins. in diam., brs. S. 81$\frac{1}{2}$° E., 154 lks. dist., marked T6N R30E S20 BT A yellow pine, 20 ins. in diam., brs. S. 55° W., 91 lks. dist., marked T6N R30E S19 BT A yellow pine, 20 ins. in diam., brs. N. 36$\frac{1}{2}$° W., 136 lks. dist., marked T6N R30E S18 BT</p> <p>Land, mountainous and rolling. Soil, sandy and gravelly, 2nd and 3rd rate in rolling land; rocky, 4th rate in mountainous land. Timber, yellow pine, spruce, fir and aspen. Undergrowth, scrub oak, broomweed, sagebrush & thorn brush.</p> <hr/> <p>From the cor. of secs. 16, 17, 20 and 21, N. 89° 55' W., on true line, bet. secs. 17 and 20. Over rolling land on mesa, thru dense timber and undergrowth. Descend 85 ft. over W. slope</p> <p>9.50 Center of draw, 100 lks. wide, course NW. Ascend 30 ft. over NE. slope to</p> <p>15.80 Rim of mesa, brs. NW. and SE. Leave mesa. Enter mountainous land. Descend 507 ft. over SW. slope to</p> <p>38.98 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 17 and 20, marked on brass cap</p>	T6N	R30E	S18	S17	S19	S20	1925	
T6N	R30E								
S18	S17								
S19	S20								
1925									

chains

$$\frac{1}{4} \frac{S 17}{S 20}$$

1925

from which

A yellow pine, 8 ins. in diam., brs. S. 1°W., 25 lks. dist., marked $\frac{1}{4}$ S20 BTA yellow pine, 8 ins. in diam., brs. N. 35°W., 7 lks. dist., marked $\frac{1}{4}$ S17 BTNo trace of the original $\frac{1}{4}$ sec. cor. can be found.

Descend 472 ft. over SW. slope

68.90 Wash, 10 lks. wide, course SW. Asc. 76 ft. over SE. slope

73.60 Spur, slopes SW. Desc. 109 ft. over W. slope to

77.96 Intersect the cor. of secs. 17, 18, 19 and 20.

Land, rolling and mountainous.

Soil, rocky, 4th rate.

Timber, yellow pine, fir, spruce and aspen.

Undergrowth, scrub oak, thorn brush and manzanita.

From the cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., hereinbefore described,

S. 87° 20' E., on true line, bet. secs. 18 and 19.

Over mountainous land, thru dense timber and undergrowth.

Descend 16 ft. over NE. slope

3.35 Swale, drains NE. Ascend 28 ft. over NW. slope

5.70 Spur, slopes NE. Descend 135 ft. over SE. slope

20.60 Swale, drains NE. Ascend 39 ft. over NW. slope

21.70 Spur, slopes NE. Descend 151 ft. over SE. slope to

43.39 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 18 and 19, marked on brass cap
$$\frac{1}{4} \frac{S 18}{S 19}$$

1925

from which

A yellow pine, 6 ins. in diam., brs. S. 42°W., 27 lks. dist., marked $\frac{1}{4}$ S19 BTA yellow pine, 8 ins. in diam., brs. N. 64°E., 21 lks. dist., marked $\frac{1}{4}$ S18 BTNo trace of the original $\frac{1}{4}$ sec. cor. can be found.

Descend 177 ft. over SE. slope

53.40 Wash, 10 lks. wide, course NE. Enter rolling land.

Ascend 19 ft. over NW. slope

65.50 Spur, slopes NE. Descend 50 ft. over SE. slope

67.90 Wash, 10 lks. wide, course NE. Ascend 30 ft. over NW. slope

76.00 Spur, slopes NE. Descend 84 ft. over SE. slope

81.00 Wash, 60 lks. wide, with stream of water, 5 lks. wide, 3 ins. deep, course N. 20°W., bet. banks 15 ft. high.

Leave timber and undergrowth, and enter nearly level open bottom land.

84.70 Old road, brs. N. and S.

85.50 Leave nearly level bottom land and enter mountainous land, dense timber and undergrowth.

Ascend 36 ft. over W. slope to

87.47 Intersect the cor. of secs. 17, 18, 19 and 20.

Land, mountainous, rolling and nearly level.

Soil, rocky, 4th rate.

Timber, yellow pine, spruce, fir, oak and aspen.

Undergrowth, scrub oak, manzanita, broomweed & sagebrush.

N. 2° 28' W., on true line, bet. secs. 17 and 18.

Over mountainous land, thru dense timber and undergrowth.

Ascend 42 ft. over W. slope

chains
 3.00 Point of short spur, slopes W. Desc. 15 ft. over N. slope.
 Enter rolling land.
 6.80 Bottom of small ravine, course W.
 Ascend 24 ft. over W. slope to
 11.20 Wash, 10 lks. wide, course W.
 Ascend 100 ft. over W. slope to
 33.00 Wash, 10 lks. wide, course W.
 Ascend slightly over S. slope
 34.00 Low spur, slopes W. Descend 13 ft. over N. slope to
 39.39 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins.
 in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs.
 17 and 18, marked on brass cap



from which

A yellow pine, 8 ins. in diam., brs. N. 34° W., 23 lks. dist.,
 marked $\frac{1}{4}$ S18 BT

A yellow pine, 22 ins. in diam., brs. East, 102 lks. dist.,
 marked $\frac{1}{4}$ S17 BT

No trace of the original $\frac{1}{4}$ sec. cor. can be found.

Descend slightly over N. slope to

39.70 Wash, 10 lks. wide, course W. Ascend 23 ft. over S. slope

45.00 Spur, slopes W. Descend 38 ft. over N. slope

55.00 Wash, 10 lks. wide, course W.

Ascend 69 ft. over SW. slope

67.00 Spur, slopes W.

Descend 68 ft. over N. slope

78.10 Head of wash, course NW. Descend slightly over NW. slope to

78.78 (Proportional dist.) Set an iron post, 3 ft. long, 2 ins.
 in diam., 24 ins. in the ground, for reestablished cor.
 of secs. 7, 8, 17 and 18, marked on brass cap,



from which

A yellow pine, 16 ins. in diam., brs. N. 4° E., 50 lks. dist.,
 marked T6N R30E S8 BT

A yellow pine, 14 ins. in diam., brs. S. 35° E., 76 lks. dist.,
 marked T6N R30E S17 BT

A yellow pine, 14 ins. in diam., brs. S. 38° W., 31 lks. dist.,
 marked T6N R30E S18 BT

A yellow pine, 26 ins. in diam., brs. N. 80° W., 54 lks. dist.,
 marked T6N R30E S7 BT

No trace of the original sec. cor. can be found.

Land, mountainous and rolling.

Soil, rocky, 4th rate.

Timber, yellow pine, fir, spruce, oak and aspen.

Undergrowth, scrub oak, sagebrush, thorn brush & manzanita.

From the cor. of secs. 8, 9, 16 and 17,
 N. 89° 55' W., on true line, bet. secs. 8 and 17.
 Over mountainous land, thru dense timber and undergrowth.

Ascend 45 ft. over NE. slope to


3.00 Spur, slopes NW.

Descend 315 ft. over W. slope

27.60 Wash, 50 lks. wide, course NW.

Ascend 230 ft. over NE. slope to

43.63 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24
 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs.
 8 and 17, marked on brass cap



	chains	from which A spruce, 14 ins. in diam., brs. S. 38° E., 31 lks. dist., marked $\frac{1}{4}$ S17 BT A spruce, 18 ins. in diam., brs. N. 55° W., 37 lks. dist., marked $\frac{1}{4}$ S8 BT No trace of the original $\frac{1}{4}$ sec. cor. can be found. Ascend 34 ft. over NE. slope
47.40	Ridge, brs. NW. and SE. Descend 1093 ft. over SW. slope	
85.00	Wash, 10 lks. wide, course NW. Ascend 35 ft. over NE. slope	
86.50	Spur, slopes NW. Descend gradually over W. slope to	
86.80	Wash, 15 lks. wide, course NW. Descend 11 ft. over NW. slope to	
87.26	Intersect the cor. of secs. 7, 8, 17 and 18. Land, mountainous. Soil, rocky, 4th rate. Timber, yellow pine, fir, spruce, oak and aspen. Undergrowth, scrub oak, manzanita broomweed and thorn brush.	

		From the cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp. hereinbefore described, S. 86° 00' E., on true line, bet. secs. 7 and 18 (W. $\frac{1}{2}$) Over nearly level, open, cultivated land.
6.70	Creek, with stream of water, 5 lks. wide, 1 in. deep, course NE. Continue over cultivated land.	
22.70	From this point the house of R. Sharp brs. N. 5° E. Leave nearly level cultivated land and enter rolling land, scattering timber and dense undergrowth, brs. NE. and SW. Ascend 31 ft. over NW. slope.	
27.16	Point of spur, slopes N. Descend 38 ft. over NE. slope to	
29.20	Foot of slope, brs. NW. and SE. Leave rolling land, timber and undergrowth and enter level open cultivated land.	
39.20	Fence, brs. N. and S.	
40.25	Intersect point for $\frac{1}{4}$ sec. cor. which is satisfactory to the land owners concerned, namely R. L. Sharp, and David Love, whose affidavits to that effect are incorporated in these notes. This point is at the N. end of an old line of post stubs. No trace of the original $\frac{1}{4}$ sec. cor. can be found. Reestablish the $\frac{1}{4}$ sec. cor. at this point as follows: Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 7 and 18, marked on brass cap	
		$\frac{1}{4} \frac{S 7}{S 18}$ 1925
		from which, A yellow pine, 28 ins. in diam., brs. N. 44 $\frac{1}{2}$ ° W., 740 lks. dist., marked $\frac{1}{4}$ S7 BT A yellow pine, 28 ins. in diam., brs. S. 60° W., 790 lks. dist., marked $\frac{1}{4}$ S18 BT House of R. L. Sharp brs. N. 37° W.
		From $\frac{1}{4}$ sec. cor. S. 86° 5' E., on true line, bet. secs. 7 and 18 (E. $\frac{1}{2}$) Over level open cultivated land.
7.60	Road, brs. NW. and SE.	
15.00	Auger Creek, 80 lks. wide, with stream of water, 13 lks. wide, 1 in. deep, course N., bet. banks 15 ft. high. Continue over level cultivated land.	
19.54	Fence, brs. N. and S. Leave cultivated land. Continue over level open land.	
23.00	Leave level open land and enter mountainous land, dense timber and undergrowth. Ascend 202 ft. over W. slope	

chains
 28.00 Spur, slopes NW. Enter rolling land.
 Descend 18 ft. over NE. slope
 39.44 Wash, 10 lks. wide, course NW. Enter mountainous
 land. Ascend 30 ft. over SW. slope
 41.00 Spur, slopes NW. Descend 30 ft. over NE. slope
 43.15 Wash, 10 lks. wide, course NW. Ascend 8 ft. over NW. slope to
 43.75 Intersect the cor. of secs. 7, 8, 17 and 18.

Land, nearly level, rolling, level and mountainous.
 Soil, sandy, 2nd rate in level and nearly level land;
 elsewhere, rocky, 4th rate.
 Timber, yellow pine, spruce, oak and juniper.
 Undergrowth, sagebrush, broomweed, thorn brush, scrub oak
 and manzanita.

N. 9° 40' E., on true line, bet. secs. 7 and 8.
 Over mountainous land, thru dense timber and undergrowth.
 Descend 31 ft. over NW. slope
 1.00 Wash, 20 lks. wide, course NW. Asc. 31 ft. over SW. slope
 4.70 Spur, slopes NW. Desc. 102 ft. over NE. slope
 7.40 Wash, 10 lks. wide, course NW. Ascend 114 ft. over W. slope
 11.90 Shallow draw, course SW. Enter rolling land.
 Ascend gradually over S. slope
 13.90 Spur, slopes W. Descend 46 ft. over N. slope
 25.10 Wash, 5 lks. wide, course NW. Asc. 52 ft. over SW. slope
 30.00 Spur, slopes W. Descend 36 ft. over N. slope
 32.40 Wash, 30 lks. wide, course W. Asc. 16 ft. over S. slope
 37.00 Spur, slopes W. Descend 20 ft. over N. slope
 39.70 Wash, 10 lks. wide, course W. Asc. slightly over S. slope to
 39.93 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam.,
 20 ins. in the ground to bedrock, supported in a mound
 of stone, for reestablished $\frac{1}{2}$ sec. cor. of secs. 7 and 8,
 marked on brass cap

S7 | S8

1925

from which

A yellow pine, 12 ins. in diam., brs. S. 86° E., 56 lks. dist.
 marked + S8 BT

A yellow pine, 10 ins. in diam., brs. S. 20° W., 89 lks. dist.
 marked + S7 BT

No trace of the original $\frac{1}{2}$ sec. cor. can be found.

Ascend 33 ft. over SW. slope
 44.00 Spur, slopes W. Enter mountainous land.
 Descend 105 ft. over N. slope
 47.25 Wash, 10 lks. wide, course SW. Asc. 91 ft. over S. slope
 50.10 Spur, slopes W. Descend 9 ft. over N. slope
 51.60 Wash, 5 lks. wide, course SW. Asc. 191 ft. over S. slope
 61.00 Spur, slopes W. Descend 163 ft. over N. slope
 63.50 Wash, 10 lks. wide, course W. Asc. 27 ft. over S. slope
 68.80 Spur, slopes W. Descend 219 ft. over N. slope to
 79.86 Intersect the original cor. of secs. 5, 6, 7 and 8, which is
 a lava stone, 7x7x18 ins., marked with 5 notches on each
 of S. and E. faces, firmly set in a mound of stone, and
 witnessed by two bearing trees:
 A yellow pine, 8 ins. in diam., brs. S. 63° E., 11 lks.
 dist., marked T6N R30E S8 BT and
 A yellow pine, 10 ins. in diam., brs. S. 26° W., 7 lks.
 dist., marked T6N R30E S7 BT

Reconstruct this cor. monument as follows:
 Remove the mound of stone and in center of its position,
 reset old cor. stone 12 ins. in the ground, and alongside
 same set an iron post, 3 ft. long, 2 ins. in diam., 24 ins.
 in the ground, for cor. of secs. 5, 6, 7 and 8, marked on
 brass cap

chains

T6N	R30E
S 6	S 5
S 7	S 8

1925

In addition to the old bearing trees, establish four new bearing trees:

- A yellow pine, 14 ins. in diam., brs. N. 74° E., 37 lks. dist., marked T6N R30E S5 BT
 A yellow pine, 10 ins. in diam., brs. S. 38° E., 45 lks. dist., marked T6N R30E S8 BT
 A yellow pine, 12 ins. in diam., brs. S. 58° W., 43 lks. dist., marked T6N R30E S7 BT
 A yellow pine, 16 ins. in diam., brs. N. 86° W., 30 lks. dist., marked T6N R30E S6 BT

Land, mountainous and rolling.

Soil, rocky, 4th rate.

Timber, yellow pine, spruce, fir, oak and juniper.

Undergrowth, scrub oak, sagebrush, broomweed and manzanita.

From the cor. of secs. 4, 5, 8 and 9,
 S. 89° 19' W., on true line, bet. secs. 5 and 8. (E. ½)
 Over rolling land, thru dense timber and undergrowth.

Descend gradually over N. and NW, slopes

- 8.30 Wash, 10 lks. wide, course N. Asc. 38 ft. over E. slope
 19.80 Spur, slopes N. Desc. 30 ft. over NW slope
 25.00 Shallow draw, course N. Ascend 22 ft. over NE slope
 29.80 Spur, slopes N. Descend 16 ft. over W. slope
 30.30 Wash, 10 lks. wide, course N. Ascend 34 ft. over E. slope
 35.30 Spur, slopes N. Descend 57 ft. over W. slope to
 39.80 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 5 and 8, which is a lava stone, 12x6x5 ins. above ground, marked $\frac{1}{4}$ on N. face, firmly set, and witnessed by one bearing tree: a yellow pine, 24 ins. in diam., N. 43° W., 16 lks. dist., marked $\frac{1}{4}$ S BT

Reconstruct this cor. monument as follows:

Alongside old cor. stone, set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 5 and 8, marked on brass cap

$\frac{1}{4}$	S 5
	S 8

1925

In addition to the old bearing tree, establish two new bearing trees:

- A yellow pine, 24 ins. in diam., brs. N. 18° E., 36 lks. dist., marked $\frac{1}{4}$ S5 BT
 A yellow pine, 20 ins. in diam., brs. S. 36° W., 63 lks. dist., marked $\frac{1}{4}$ S8 BT

Thence

N. 89° 27' W., on true line, bet. secs. 5 and 8 (7. ½)

Over rolling land, thru dense timber and undergrowth.

Descend gradually over W. slope to

- 1.20 Wash, 10 lks. wide, course N. Enter level bottom land.
 3.50 Wash, 15 lks. wide, course N. Leave level and enter mountainous land. Ascend 160 ft. over NE. and N. slopes to sec. cor.
 22.80 Wash, course N., with small stream of water.
 Spring at head of this wash, brs. S. about 8 chs. dist.
 39.56 Intersect the cor. of secs. 5, 6, 7 and 8.

Land, rolling, level and mountainous.

Soil, rocky, 4th rate.

Timber, yellow pine, spruce, fir, oak and juniper.

Undergrowth, scrub oak, manzanita and thorn brush.

chains	From the cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp. hereinbefore described, N. 89° 20' E., on true line, bet. secs. 6 and 7 (W. $\frac{1}{2}$) Over nearly level land, thru dense timber and scattering undergrowth.			
• 17.75	Old road, brs. N. and S.			
22.25	Old road, brs. NE. and SW.			
38.95	Intersect the original $\frac{1}{4}$ sec. cor. of secs. 6 and 7, which is a sandstone, 2x12x10 ins., marked with a cross (X), set in a mound of earth and stone, with decayed remains of a wooden stake underneath. No accessories. Reconstruct this cor. monument as follows: Remove the mound, and in center of its position, reset old cor. stone 8 ins. in the ground, and alongside same, set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. of secs. 6 and 7, marked on brass cap			
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>S 6</td></tr> <tr><td>—</td></tr> <tr><td>S 7</td></tr> </table>	S 6	—	S 7
S 6				
—				
S 7				
	1925			
	from which			
	A yellow pine, 20 ins. in diam., brs. N. 59° W., 135 lks. dist., marked S 6 BT			
	A yellow pine, 20 ins. in diam., brs. S. 55° W., 56 lks. dist., marked S 7 BT			
	Thence			
	S. 83° 49' E., on true line, bet. secs. 6 and 7 (E. $\frac{1}{2}$) Over nearly level land, thru dense timber and scattering undergrowth			
0.17	Fence, brs. N. and S.			
4.52	A point from which, David Love's barn brs. S. 11° 22' E. N. end of Henry Thompson's house brs. S. 39° 20' E. N. " " " " barn, brs. S. 49° 30' E.			
4.70	Top of bank, brs. N. and S. Leave nearly level and enter mountainous land. Desc. 50 ft. over E. slope. Leave timber			
6.00	Foot of bank, brs. N. and S. Enter level bottom land. From this point, David Love's barn brs. S. 10° 6' E. Corral, brs. S. 36° 10' E.			
15.60	A point from which, David Love's house brs. S. 8° 10' W. " " barn brs. S. 16° 37' W. Henry Thompson's barn brs. S. 16° 50' E. " " house brs. S. 9° 40' E. Corral brs. S. 25° E. Rock chimney on Marion Lee's house brs. N. 34° 50' E.			
16.20	Road, brs. N. and S.			
17.00	Fence, brs. N. and S. Enter cultivated land.			
25.60	Auger Creek, 30 lks. wide, with stream of water, 10 lks. wide, 6 ins. deep, course N., bet. banks 6 ft. high. Continue over level cultivated bottom land.			
32.30	Leave level cultivated bottom land and enter mountainous land. Ascend 195 ft. over W. slope, thru dense timber and undergrowth.			
35.70	Fence, brs. N. 25° W. and S. 25° E.			
47.00	Spur, slopes N. Descend 54 ft. over E. slope.			
48.45	Wash, 20 lks. wide, course N. Ascend 54 ft. over NW. and N. slopes to			
57.88	Intersect the cor. of secs. 5, 6, 7 and 8.			
	Land, nearly level, level and mountainous. Soil, in the level and nearly level land, sandy loam, 1st rate; elsewhere, rocky, 4th rate. Timber, yellow pine, and juniper. Undergrowth, sagebrush, broomweed and thorn brush.			

62 Resurvey of Subdivision lines of Township 6 North, Range 30 East

chains	From the cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., described in Book "G" of this group, S. $5^{\circ}32'E.$, on true line, bet. secs. 5 and 6. Over gently rolling bottom land, thru scattering timber and undergrowth. Asc. gradually over NE. slope.
1.07	Fence, brs. NE. and SW.
1.30	Telephone line, brs. NE. and SW.
2.50	Road, brs. NE. and SW.
3.00	Fence, brs. NE. and SW. Enter level open, cultivated land.
6.80	Fence, brs. E. and W. Fence cor. brs. E. about 8 chs. dist., from which fences extend W., N., and S.
9.30	Shallow wash, 10 lks. wide, course NE.
14.10	Same wash, course NW.
20.20	Fence, brs. E. and W.
20.80	Auger Creek, with stream of water, 10 lks. wide, 1 ft. deep, course NE.
28.00	Auger Creek, with stream of water, 10 lks. wide, 1 ft. deep, in bend, course NW. from SW.
39.60	Fence, brs. E. and W.
41.09	(Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 5 and 6, marked on brass cap
	$\begin{array}{c} \frac{1}{4} \\ S6 S5 \\ 1925 \end{array}$
	from which A yellow pine, 10 ins. in diam., brs. N. $48^{\circ}E.$, 415 lks. dist., marked $\frac{1}{4}$ S5 BT No other bearing tree available. Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. From this cor., rock chimney on Marion Lee's house, brs. S. $71^{\circ}15'W.$
57.90	Continue over level open cultivated land. Fence, brs. E. and W. Leave level open cultivated land and enter rolling land and scattering undergrowth. Ascend 27 ft. over gradual N. slope.
63.50	Fence, brs. NE. and SW. Enter scattering timber, brs. E. and W.
70.00	Leave rolling and enter mountainous land, dense timber and undergrowth. Asc. 209 ft. over N. slope to
83.87	Intersect the cor. of secs. 5, 6, 7 and 8.
	Land, gently rolling, level, rolling and mountainous. Soil, in N. 58 chs., sandy loam, 1st rate; elsewhere, rocky, 4th rate. Timber, yellow pine, spruce, oak and juniper. Undergrowth, scrub oak, manzanita, sagebrush, thorn brush and broomweed.

GENERAL DESCRIPTION

This township is situated on the divide between the Little Colorado, Black and San Francisco rivers, the drainage of most of the township being northerly into the Little Colorado thru the tributaries, Nutrioso and Auger Creeks. The San Francisco River heads in a spring on S. bdy. of sec. 31 and flows southeasterly. A small area in the western parts of secs. 30 and 31 drains westerly into Black River.

The surface is mostly mountainous. On the mesas and benches the surface is rolling and level, and in the bottom lands along the creeks there is considerable level and nearly level surface.

The elevation ranges from 7,500 to 10,000 ft. above sea level.

The soil is mostly rocky, 4th rate. In the bottom lands along Nutrioso and Auger Creeks there is a sandy 1st rate soil, a large part of which is being cultivated.

Nutrioso Creek, Auger Creek and several other watercourses carry a flow of good clear water, and there are several springs in the township.

The timber consists of a dense growth of yellow pine, spruce, fir, aspen, juniper and oak, over the greater part of the tp. There is some pinion and cedar in the NW. corner, with a merchantable value as lumber, fence posts and fuel. The average diameter of the pine and fir trees is about 28 inches, however, along the N. half of the E. bdy. many of the trees have a diameter of 4 or 5 ft. and tower 250 ft. above the ground.

While the township as a whole is covered with a dense undergrowth, the precipitous slopes of the high mesa in the south central portion have undergrowth, fallen timber and timber on them in the nature of a jungle which rendered the survey extremely difficult to perform. The undergrowth consists of scrub oak, manzanita, brigham, thorn and sagebrush, broomweed, and other varieties.

There is no apparent indication of mineral deposits, although the formation of much of the tp. is of volcanic origin.

The settlers residing in the tp. at this time are; sec. 4, Marcellus Hulsey and Glen Knowlton; sec. 6, Marion Lee; sec. 7, Henry Thompson, David Love and R. L. Sharp; sec. 15, Dudley Hamblin; and settlers in secs. 2, 6 and 26, whose names were not obtained.

The entire township is within the Apache National Forest Reserve. The U.S. Forest Service Ranger Station is in sec. 6, near the $\frac{1}{2}$ sec. cor. of secs. 6 and 31 on the N. bdy. of the tp.

The improvements consist of houses, barns, corrals, wells, fences, etc. A drift fence extends NE. and SW., across the S. $\frac{1}{2}$ of the tp., from a point in NE. quarter of sec. 23 to a point near W. bdy. of sec. 31.

A telephone line extends from the Forest Ranger Station in sec. 6, thru the tp. to a point on S. bdy. of sec. 34 where it leaves the tp. and extends southeasterly about one and one half miles to the village of Alpine.

From a point on this telephone line in NE. quarter of sec. 16, another telephone line extends northeasterly to U.S.F.S. Lookout tower on Escudilla Mountain in sec. 6 of T. 6 N., R. 31 E.

The highway from Alpine to Nutrioso extends northerly and southerly thru the central portion of the tp.

An old road extends thru the west range of secs. in a northerly and southerly direction.

The chief industry of the settlers is stock raising and farming.

FINAL TEST OF INSTRUMENT

September 8, 1925:

Examine the adjustment of the instrument and find no errors; then, to test the solar apparatus by comparing its indications during a.m. and p.m. hours with a meridian determined by Polaris observation, August 29, 1925, at station in sec. 23, T. 6 N., R. 30 E., as described on page 2 hereof, proceed as follows:

At 9h.00m., a.m., app. t., set off $33^{\circ}53\frac{1}{2}'$ N. on the lat. arc, $5^{\circ}48'$ N. on the decl. arc, and determine a meridian with the solar, which agrees with the true meridian.

At app. noon, with the lat. arc unchanged, observe the sun on the meridian, and obtain a reading of $5^{\circ}47'$ N., which agrees with the computed decl. of the sun.

At 3h.00m., p.m., app. t., with the lat. arc unchanged, set off $5^{\circ}50'$ N. on the decl. arc and determine a meridian with the solar, which agrees with the true meridian.

As all of the observations made during the usual hours of solar work agree within 1' of the true meridian, conclude that the instrument has remained in satisfactory adjustment throughout the execution of the resurveys described in the foregoing notes.

AFFIDAVITS of LAND OWNERS
in connection with
REESTABLISHMENT of $\frac{1}{4}$ sec. cor. of secs. 7 and 18,
T. 6 N., R. 30 E.

Nutriso, Arizona.
October, 3, 1925.

TO U.S. General Land Office:
The point of reestablishment for the $\frac{1}{4}$ sec. cor. secs. 7 and 18, T. 6 N., R. 30 E., G. & S. R. Meridian, Arizona, as determined by Benj. J. Kinsey, U.S. Surveyor, under Group 127, Ariz., on October, 2, 1925, is mutually satisfactory to the undersigned land owners.

Signed : David Love

Lands owned: SW $\frac{1}{4}$ NE $\frac{1}{4}$, W $\frac{1}{2}$ SE $\frac{1}{4}$ sec. 7,
NW $\frac{1}{4}$ NE $\frac{1}{4}$ sec. 18, formerly the
Milton M. Gibbs, Hd. 1160, pat.
1-27-04.

Signed : R. D. Sharp

Lands owned : E $\frac{1}{2}$ NE $\frac{1}{4}$ SW $\frac{1}{4}$, SW $\frac{1}{4}$ NE $\frac{1}{4}$ SW $\frac{1}{4}$, SE $\frac{1}{4}$ SW $\frac{1}{4}$ sec
7, and NE $\frac{1}{4}$ NW $\frac{1}{4}$ sec. 18.
Formerly the John E. Cherry, Hd.
027650 pat. 9-27-19, and the
Chas. S. Love Hd. 866, pat. 10-12-00.

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Benjamin J. Kinsey, U. S. Surveyor, hereby certify upon honor that, in pursuance of ^{supplemental} special instructions received from the U. S. ~~Surveyor General~~ District Cadastral Engineer, for Group 127, Arizona,

bearing date of the 17th day of August, 1925, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, resurveyed all those parts or portions of the East boundary,

West boundary, and

Subdivision lines of

TOWNSHIP 6 NORTH, RANGE 30 EAST.

of the Gila and Salt River

Base and Meridian, in the State of Arizona, which are represented in

the foregoing field notes ^{and by diagram on page 1 hereof} as having been executed by me, and under my direction; and that all the corners of

said resurvey have been established and perpetuated in strict accordance with the Manual of Surveying Instruc-

tions, and the ^{supplemental} special written instructions of the U. S. ~~Surveyor General~~ District Cadastral Engineer, for Group 127, Arizona

and in the specific manner described in the field notes, and that the foregoing are the original field notes of such resurvey.

Place: Phoenix, Arizona

Date: January 6, 1927

Benjamin J. Kinsey
U. S. Surveyor.

APPROVAL.

OFFICE OF THE U.S. Supervisor of Surveys,

Denver, Colorado, January 11, 1927

The foregoing field notes of the resurvey of

East boundary,

West boundary, and

Subdivision lines of

TOWNSHIP 6 NORTH, RANGE 30 EAST.

the Gila and Salt River Base and Meridian, in the State of Arizona,

executed by Benjamin J. Kinsey, U. S. Surveyor,

under his ^{supplemental} special instructions dated Aug. 17, 1925, for Group 127, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the resurvey