

3738

Book "A"

4-879

BOOK 3738

FIELD NOTES

OF THE RESURVEY OF

Part of NORTH Boundary of Township 14 North, Range 4 West

WEST and NORTH Boundaries

Part (North half) of EAST Boundary and

Part of the SUBDIVISION Lines of

Township 15 North, Range 4 West

AND OF THE SURVEY OF

SOUTH Bdy. of Fractional Township 15² North, Range 4 West

Part (completion) of SOUTH Boundary

Part (completion) of EAST Boundary

TRACTS Nos. 37, 38, 39, 40, 41, 42, 43 and 44 and

Part (completion) of the SUBDIVISION Lines of

Township 15 North, Range 4 West

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

Sidney E. Blout

U.S. Cadastral Engineer


In the capacity of U. S. Surveyor, under Special Instructions dated February 11, 1924, issued by the United States Surveyor General to govern surveys included in Group No. 128 Arizona, which were approved by the Commissioner of the General Land Office, March 10, 1924, and Assignment Instructions dated May 1, 1924.

Resurvey & Survey commenced May 2, 1924

Resurvey & Survey completed June 16, 1924

INDEX DIAGRAM.


Township _____, Range _____

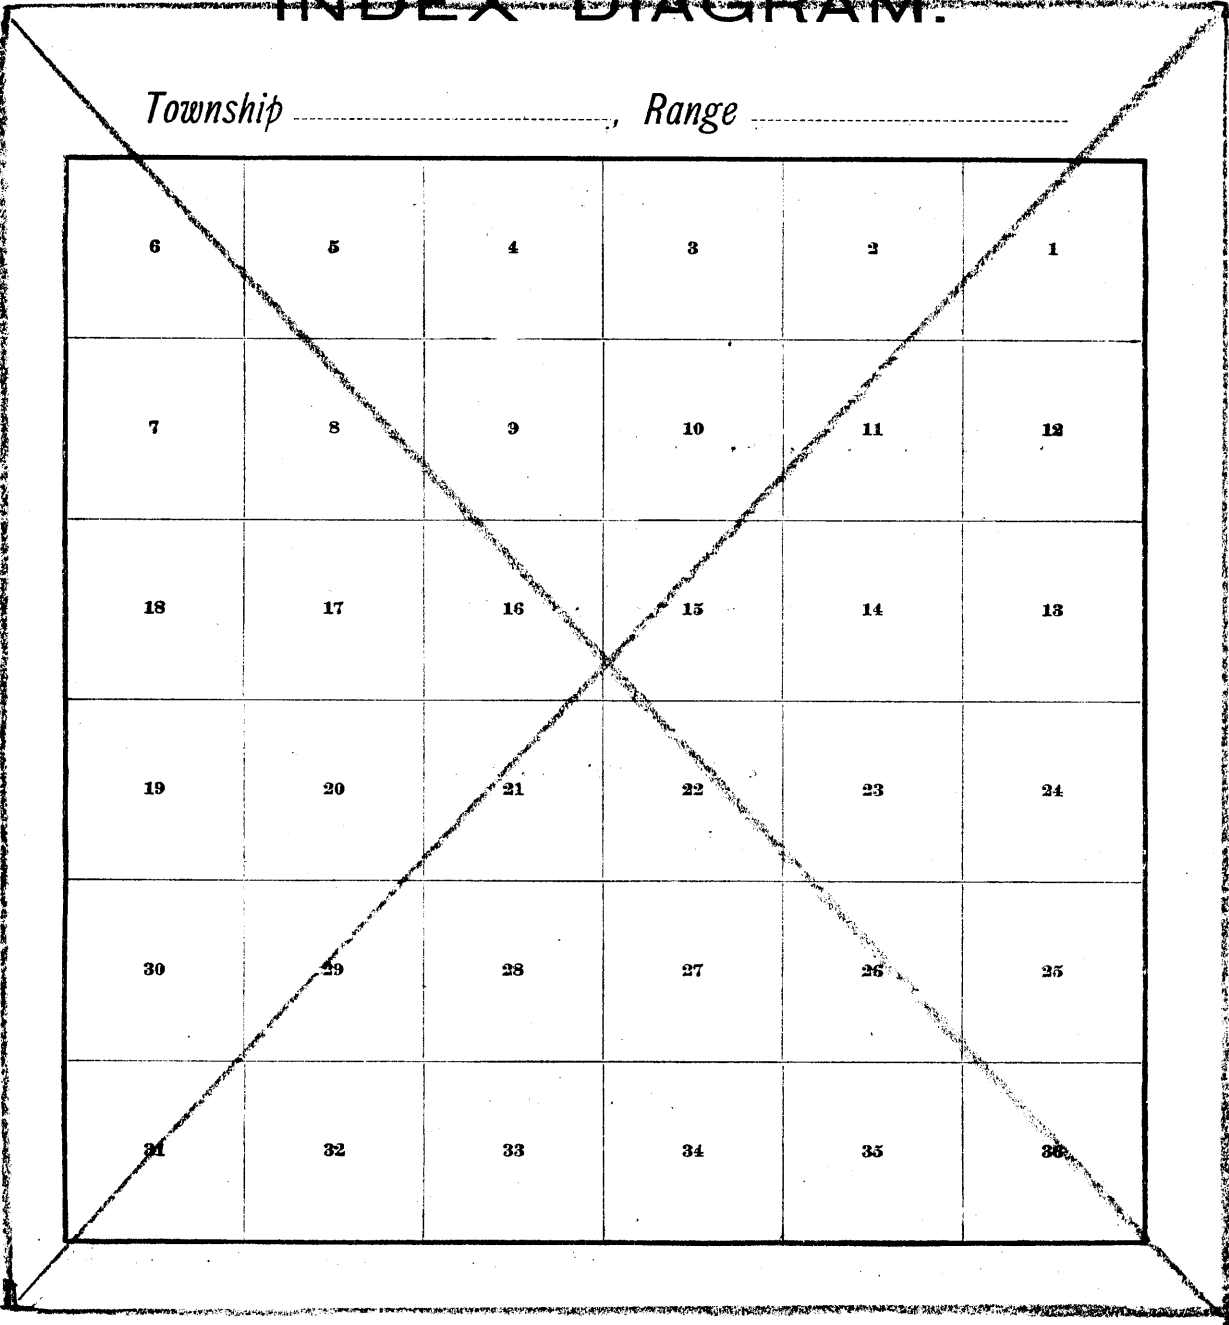

Book "A"

Group 128 - Arizona

INDEX DIAGRAM

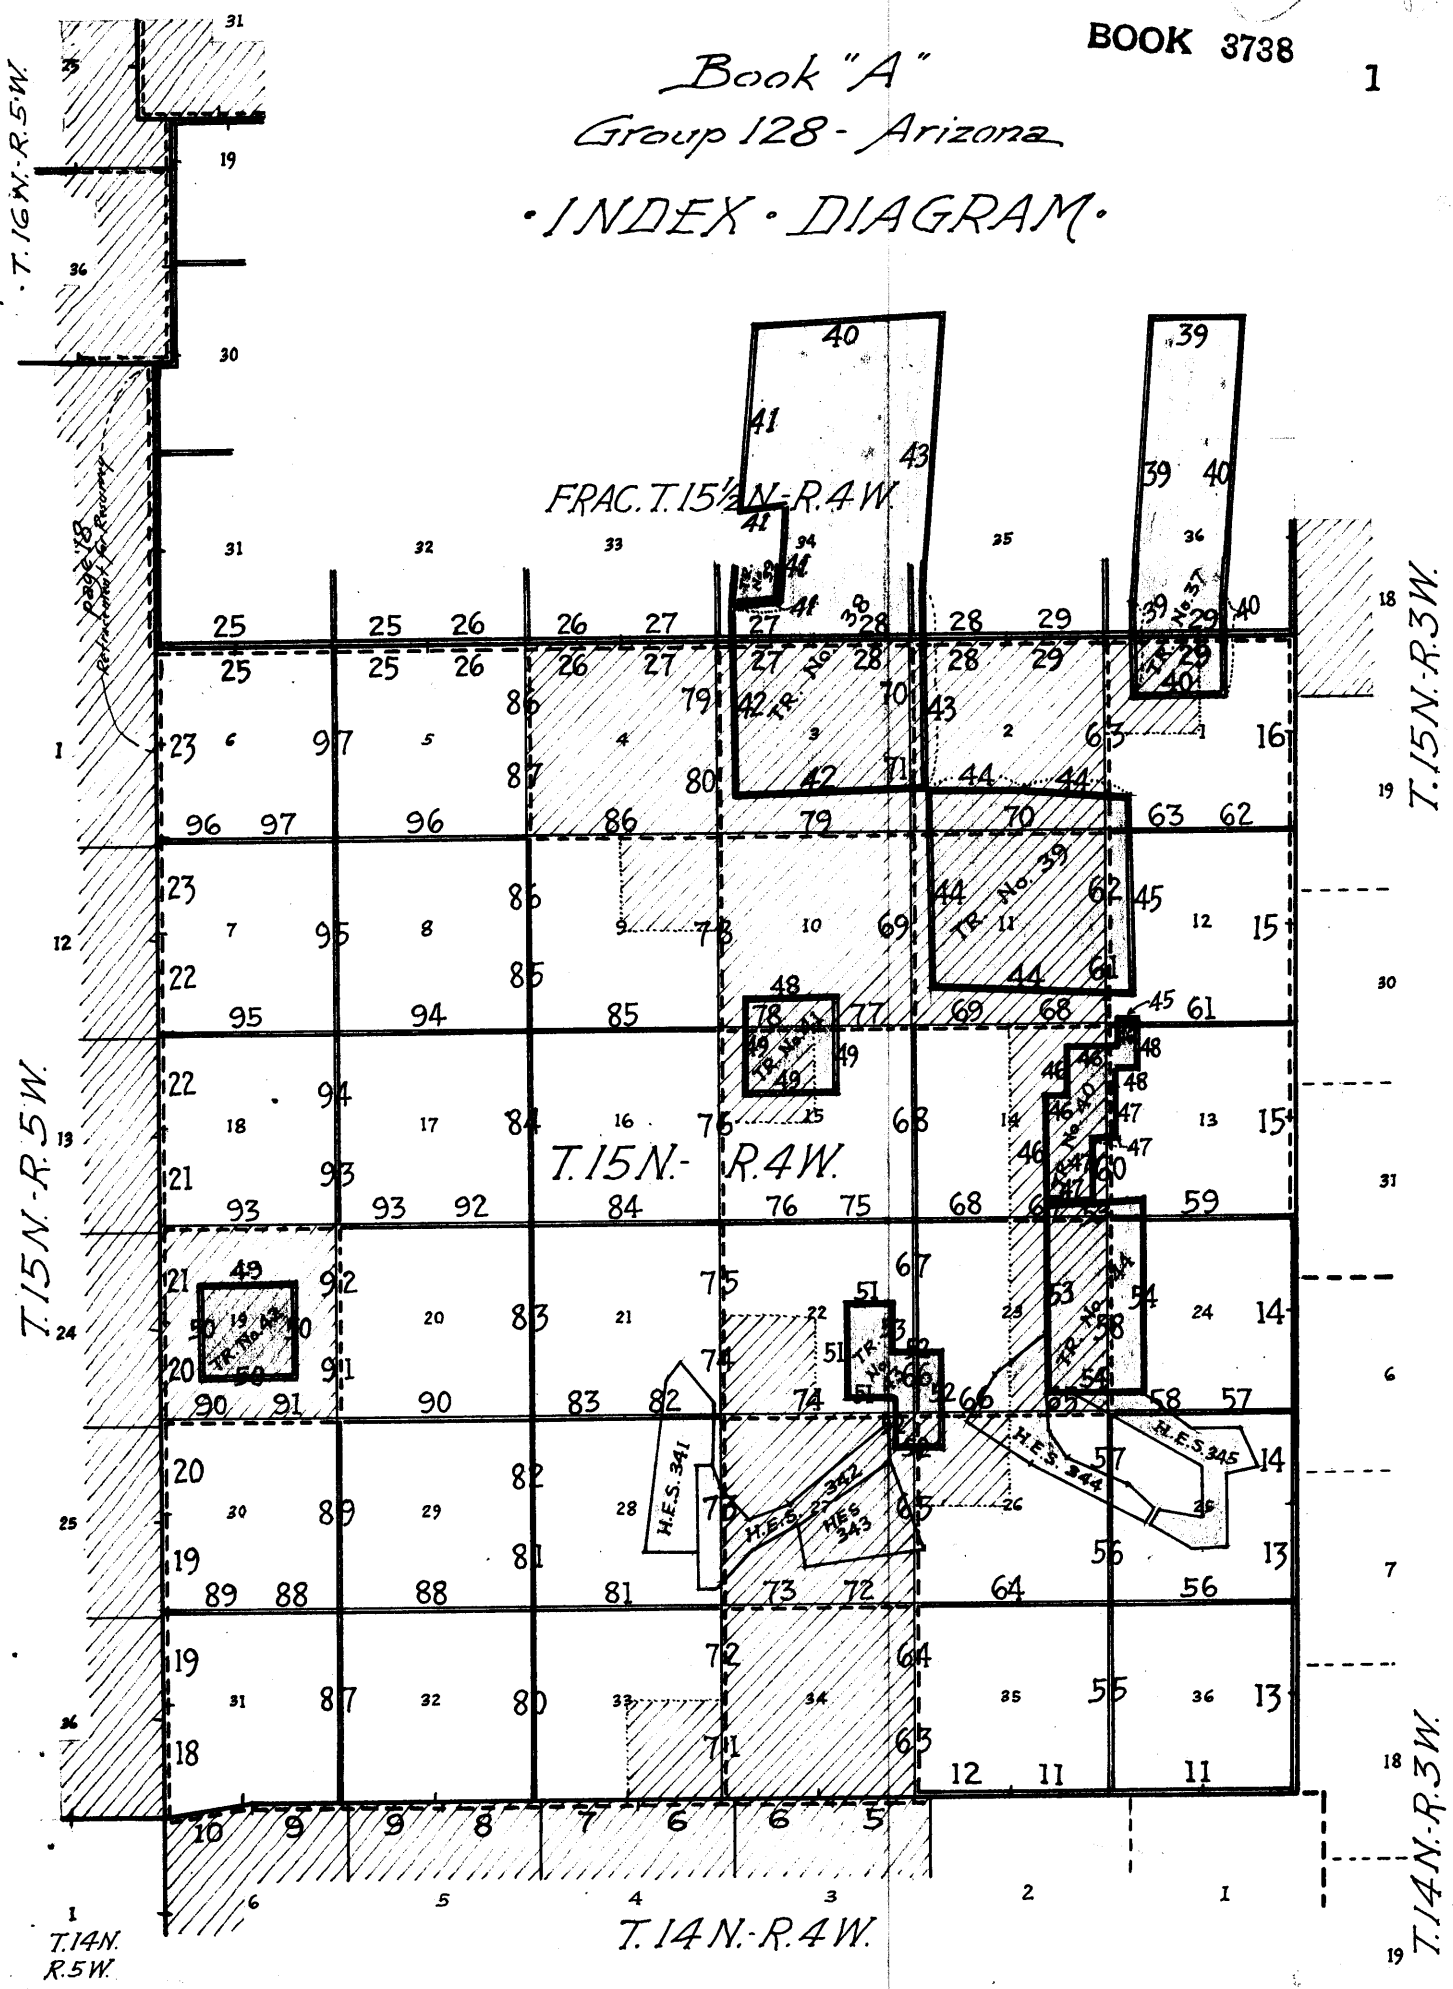

~ LEGEND ~

————— Surveyed under this group.

----- Resurveyed under this group.


————— Accepted surveys.


————— Retraced under this group.

===== Surveyed with reference to one tp. } This group.
----- Resurveyed with reference to one tp. }


----- Unsurveyed.

 Forest Homestead Entry Surveys.

 Tracts surveyed under this group.

 Areas surveyed as per accepted plats on file.

Book "A"
Group 128 - Arizona
~ DATE - DIAGRAM ~
~ 1924

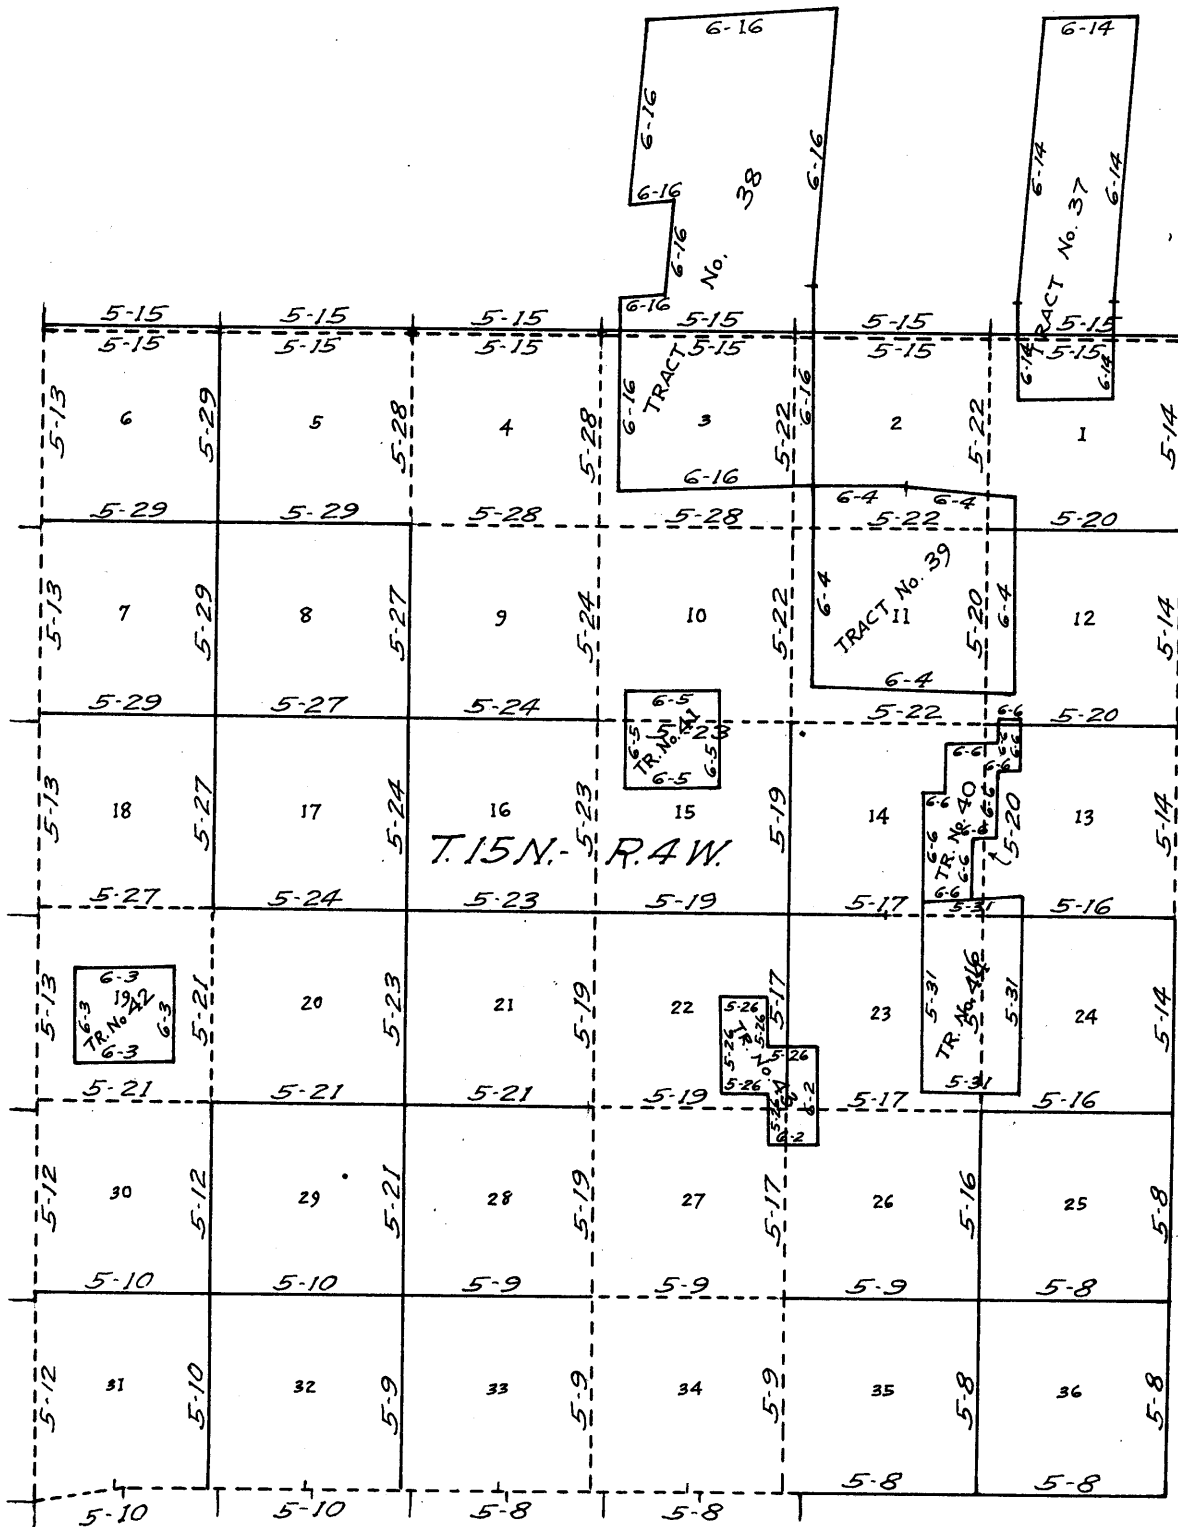

————— Surveyed by Sidney E. Blout U.S.C.E. on dates shown thereon.

- - - - - Resurveyed by Sidney E. Blout U.S.C.E. on dates shown thereon.

Dates (month & year) shown in red (all work in 1924)

Resurveys and surveys hereinafter described were executed on dates shown on diagram on page 2 hereof, by Sidney E. Blout, U.S. Cadastral Engineer, using a Buff Rocky Mountain Favorite Solar transit No. 16724 with U-shaped standards, $4\frac{1}{2}$ inch horizontal circle, 4 inch vertical circle and Improved Smith solar attachment.

The instrument was examined, tested on the meridian at the Federal Building at Phoenix, Ariz., April 30, 1924, found correct and was approved May 1, 1924 by the Assistant Supervisor of Surveys for Arizona & California, conditional upon satisfactory field tests.

Unless otherwise specified, all azimuth determinations are accomplished with the solar attachment, except the special observations on Polaris and the sun for meridian upon which to test the solar apparatus as stated in the field notes.

All measurements are made with a Lufkin 5-chain steel tape compared with a Chesterman standard steel tape and found correct. The measurements are made on the slope, the vertical angles determined, and the slope measurements properly reduced to true horizontal distances.

 TEST OF BUFF SOLAR TRANSIT No. 16724

May 2, 1924; at camp at Forest Ranger Station in sec. 33, T. 15 N., R. 4 W., Gila & Salt River Base & Meridian, Arizona, in lat. $34^{\circ}35'54''$ N., and long. $112^{\circ}41'38''$ W., examine the adjustments of the transit and find them correct, then, to test the solar apparatus by comparing its indications resulting from observations made during a.m. and p.m. hours with a meridian established by Polaris observation, proceed as follows:

May 3, 1924; at 4 h. 51.6 m. a.m. by watch set by Western Union Telegraph clock to read correct local mean time, observe Polaris at eastern elongation, making four observations, two each with the telescope in direct and reversed positions, and mark the mean point in the line thus determined by a tack in a stake driven firmly in the ground about 6 chs. N.

Azimuth of Polaris at eastern elongation = $1^{\circ}20'30''$

At 8 h. 0 m. a.m., l.m.t. lay off the azimuth of Polaris $1^{\circ}20\frac{1}{2}'$ to the west and mark the meridian thus determined by a tack in a stake driven firmly in the ground about 6 chs. N.

At 8 h. 30 m. a.m., l.m.t. set off $34^{\circ}36'$ N. on the lat. arc, $15^{\circ}44'$ N. on the decl. arc and determine a meridian with the solar which falls $\frac{1}{2}'$ E. of the true meridian.

At apparent noon with the lat. arc unchanged observe the sun on the meridian and obtain a reading of $15^{\circ}46'$ N. on the decl. arc which agrees with the computed declination of the sun.

At 3 h. 0 m. p.m. l.m.t. with the lat. arc unchanged, set off $15^{\circ}48\frac{1}{2}'$ N. on the decl. arc and determine a meridian with the solar which falls 1' W. of the true meridian.

As all of the solar observations made during the usual hours of solar work come within 1' of the true meridian conclude that the instrument is in satisfactory adjustment.

4

Resurvey of PART of NORTH Bdy. of Township 14 North, Range 4 West

chains

The West 4 miles of the N.bdy. of T.14 N., R.4 W. were surveyed by C.B. Foster U.S.D.S. in 1874, establishing all cor. monuments thereon with a common reference to areas in Ts. 14 & 15 N., R.4 W.

In 1914 J.F. Hesse U.S.S. resurveyed this part of the Tp. bdy., reconstructing all existing cor. monuments thereon, reestablishing all missing cors. by proportional measurement between existing cors., and monumenting with original reference, all cors. including the Tp. cor., with iron posts with brass caps.

No subsequent resurvey or retracement of this part of the tp. bdy. is of record.

The following notes describe a resurvey of same, altering the Hesse sec. and $\frac{1}{4}$ sec. cors. to refer to areas S. of line only and reestablishing a set of $\frac{1}{4}$ sec. and sec. cors. alternately at intervals of 40 chs. in westing counting from the reestablished cor. of secs. 34 & 35, T.15 N., R.4 W. The position for the reestablishment of the cor. of secs. 34 & 35 is at 160 chs. in westing from SE. cor. of T.15 N., R.4 W., determined after survey of the East two miles of S. bdy. of T.15 N., R.4 W. as hereinafter described.

In the retracement for this resurvey the bearings of the Hesse resurvey are used for the randoms.

Retracement for Resurvey.

- 39.39 From cor. of Ts. 14 & 15 N., Rs. 4 & 5 W.,
N. $83^{\circ}39'E.$, on random line, on N. bdy. of sec. 6 (W. $\frac{1}{4}$)
Fall 2 lks. N. of the $\frac{1}{4}$ sec. cor. of secs. 6 and 31, hereinafter described.
True course and dist. of W. $\frac{1}{2}$ of N. bdy. of sec. 6 are therefore, S. $83^{\circ}41'W.$, 39.39 chs.
- 40.10 Thence
N. $89^{\circ}28'E.$, on random line, on N. bdy. of sec. 6 (E. $\frac{1}{2}$)
Fall 2 lks. N. of the cor. of secs. 5, 6, 31 & 32, hereinafter described.
True course and dist. of E. $\frac{1}{2}$ of N. bdy. of sec. 6 are therefore, S. $89^{\circ}30'W.$, 40.10 chs.
- 40.16 N. $89^{\circ}28'E.$, on random line, on N. bdy. of sec. 5 (W. $\frac{1}{2}$)
Fall 2 lks. N. of the $\frac{1}{4}$ sec. cor. of secs. 5 & 32, hereinafter described.
True course and dist. of W. $\frac{1}{2}$ of N. bdy. of sec. 5 are therefore, S. $89^{\circ}30'W.$, 40.16 chs.
- 40.15 Thence
N. $89^{\circ}28'E.$, on random line, on N. bdy. of sec. 5 (E. $\frac{1}{2}$)
Fall 2 lks. N. of the cor. of secs. 4, 5, 32 & 33, hereinafter described.
True course and dist. of E. $\frac{1}{2}$ of N. bdy. of sec. 5 are therefore, S. $89^{\circ}30'W.$, 40.15 chs.
- 41.13 S. $89^{\circ}7'E.$, on random line, on N. bdy. of sec. 4 (W. $\frac{1}{2}$)
Intersect the $\frac{1}{4}$ sec. cor. of secs. 4 & 33, hereinafter described.
True course and dist. of W. $\frac{1}{2}$ of N. bdy. of sec. 4 are therefore, N. $89^{\circ}7'W.$, 41.13 chs.
- 41.00 Thence
S. $88^{\circ}57'E.$, on random line, on N. bdy. of sec. 4 (E. $\frac{1}{2}$)
Intersect the cor. of secs. 3, 4, 33 & 34, hereinafter described.
True course and dist. of E. $\frac{1}{2}$ of N. bdy. of sec. 4 are therefore, N. $88^{\circ}57'W.$, 41.00 chs.
- 40.94 N. $89^{\circ}41'E.$, on random line, on N. bdy. of sec. 3 (W. $\frac{1}{2}$)
Intersect the $\frac{1}{4}$ sec. cor. of secs. 3 and 34 hereinafter described.
True course and dist. of W. $\frac{1}{2}$ of N. bdy. of sec. 3 are therefore, S. $89^{\circ}41'W.$, 40.94 chs.

.Resurvey of Part of North Boundary of Township 14 North, Range 4 West.

Chains Thence
 40.99 N. 89° 34' E., on random line on N. bdy. of sec. 3 (E. 1/2).
 Intersect the cor. of secs. 2, 3, 34 and 35, hereinafter
 described.
 True course and dist. of E. 1/2 of N. bdy. of sec. 3, are,
 therefore, S. 89° 34' W., 40.99 chs.

RESURVEY.

The reconstructed cor. of secs. 2, 3, 34 and 35 is an
 iron post, 3 ins. in diam., projecting 12 ins. above
 ground, firmly set, properly marked on brass cap and
 witnessed by four pits, one each NE., SE., SW., and
 NW. of cor., and a mound of earth. W. No bearing
 trees.

Alter this cor. monument to refer to secs. 2 and 3 only
 by changing marking on brass cap to read:

T 15 N
 S 35
 R 4 W S 3 | S 2
 T 14 N
 1914-24

Destroy the earth mound, fill in the pits and deposit a
 stone marked with a cross (X) at base of post.

Thence
 S. 89° 34' W., on true line, on N. bdy. of sec. 3 (E. 1/2).
 Over gently rolling land, thru dense undergrowth.
 Desc. gradually over SW. slope.
 7.43 (160.00 chs. in westing from SE. cor. of T. 15 N., R. 4
 W.)

Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins.
 in the ground, and deposit a stone, marked with a
 cross (X) at base of post, for reestablished cor. of
 secs. 34 and 35, only, marked on brass cap

T 15 N R 4 W
S 34 | S 35
 T 14 N R 4 W
 1924

25.43 Descend gradually over SW. slope to
 Enter level land, bears NE. and SW.
 31.60 Wash, 15 lks. wide, 1 ft. deep, course SW.
 40.99 Intersect the reconstructed 1/2 sec. cor. of secs. 3 and
 34, which is an iron post, 1 in. in diam., projecting
 12 ins. above ground, firmly set, properly marked on
 brass cap and witnessed by two pits, one each E. and
 W. of post, and a mound of earth N. No bearing trees.
 Alter this cor. monument to refer to the quarters of sec.
 3, only, by changing marking on brass cap to read:

1/4 S 3
 1914-24

Destroy the earth mound, fill in the pits, and deposit
 a stone marked with a cross (X) at base of post.

Resurvey of Part of North Boundary of Township 14 North, Range 4 West.

Chains Thence
 S. 89° 41' W., on true line, on N. bdy. of sec. 3 (W. $\frac{1}{2}$)
 Over level land, thru dense undergrowth.
 2.84 Wash, 30 lks. wide, 4 ft. deep, course SW. Leave level
 and enter gently rolling land and scattering timber.
 Ascend 18 ft. over SE. slope to $\frac{1}{4}$ sec. cor.
 3.85 Road, Skull Valley to Prescott, bears NE. and SW.
 6.44 (40.00 chs. in westing, from cor. of secs. 34 and 35).
 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in
 the ground for reestablished $\frac{1}{4}$ sec. cor. of sec. 34
 only, marked on brass cap

$\frac{1}{4}$ S 34
 1924

From which

An oak, 8 ins. in diam., bears N. 40 $\frac{1}{2}$ ° E., 204 lks.
 dist., marked $\frac{1}{4}$ S 34 B T.
 A juniper, 12 ins. in diam., bears N. 4° E., 162 lks.
 dist., marked $\frac{1}{4}$ S 34 B T.
 Ascend 75 ft. over SE. slope.
 28.84 Low ridge, bears NE. and SW. Desc. 56 ft. over NW.
 slope to
 40.94 Intersect the cor. of secs. 3, 4, 33 and 34 which is an
 iron post, 3 ins. in diam., projecting 12 ins. above
 ground, firmly set, properly marked on brass cap and
 witnessed by four pits, one each NE., SE., SW. and
 NW. of post and a mound of earth W.
 No bearing trees.
 Alter this cor. monument to refer to secs. 3 and 4, only,
 by changing marking on brass cap to read:

T 15 N
 R 4 W $\frac{S 34}{S 4 | S 3}$
 T 14 N
 1914-24

Destroy the earth mound, fill in the pits and deposit a
 stone marked with a cross (X) at base of post.
 Land, gently rolling and level.
 Soil, sandy and gravelly, 2nd and 3rd rate.
 Timber, oak and juniper.
 Undergrowth, greasewood and scrub oak.

From cor. of secs. 3 and 4.
 N. 88° 57' W., on true line, on N. bdy. of sec. 4 (E. $\frac{1}{2}$)
 Over gently rolling land, through dense undergrowth.
 Descend slightly over NW. slope to
 0.50 Road, Skull Valley to Tonto Springs Ranger Station,
 bears NW. and SE. Desc. gradually over N. slope.
 0:84 Intersect fence cor. from which wire fences extend N. 88 $\frac{3}{4}$
 W., and S.
 Thence along S. side of fence.
 5.50 (80.00 chs. in westing from cor. of secs. 34 and 35).
 Set an iron post, 3-ft. long, 2 ins. in diam., 27 ins.
 in the ground and deposit a stone marked with a cross
 (X) at base of post, for reestablished cor. of secs.
 33 and 34, marked on brass cap

Resurvey of Part of North Boundary of Township 14 North, Range 4 West

Chains

T 15 N R 4 W
S 33 | S 34
 S 4
 T 14 N R 4 W
 1924

From which

A juniper, 15 ins. in diam., bears N. $51\frac{1}{2}^\circ$ W., 496 lks. dist., marked T 15 N R 4 W S 33 B T.

No other bearing trees available.

Ascend gradually over NE. slope.

28.50 Ridge, bears NW. and SE. Enter heavily rolling land. Descend 50 ft. over SW. slope to

41.00 Intersect the reconstructed $\frac{1}{4}$ sec. cor. of secs. 4 and 33, which is an iron post, 1 in. in diam., projecting 14 ins. above ground, properly marked on brass cap and witnessed by a mound of stone W. No bearing trees.

Alter this cor. monument to refer to the quarters of sec. 4, only, by changing markings on brass cap to read:

$\frac{1}{4}$ S 4
 1914-24

Destroy the old stone mound and raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high S. of cor.

Thence

N. $89^\circ 07'$ W., on true line, on N. bdy. of sec. 4 ($W.\frac{1}{2}$). Over rolling land, thru dense undergrowth, parallel to wire fence 10 lks. N. of line.

Descend 30 ft. over SW. slope to

4.51 (40.00 chs. in westing from cor. of secs. 33 and 34.) Set an iron post, 3 ft. long, 1 in. in diam., 22 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post for reestablished $\frac{1}{4}$ sec. cor. of sec. 33, only, marked on brass cap

$\frac{1}{4}$ S 33
 1924

No bearing trees available.

Descend 44 ft. over SW. slope to

10.35 Top of left bank of ravine, bears NE. and SW. Enter mountainous land, and scattering timber.

Descend 55 ft. over NW. slope to

18.50 Bottom of ravine, 40 lks. wide, containing stream of water 3 lks. wide, 2 ins. deep, course SW.

Ascend 286 ft. over SE. slope.

35.10 Wire fence, bears N. and S. Fence cor. brs. N. 15 lks. dist., from which fences extend E. and S.

38.10 Spur, slopes SW. Desc. 64 ft. over W. slope to

41.13 Intersect the reconstructed cor. of secs. 4, 5, 32 and 33, which is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap and witnessed by a mound of stone W.

No bearing trees.

Alter this cor. monument to refer to secs. 4 and 5, only, by changing marking on brass cap to read

T 15 N
 R 4 W S 5 | S 4
 T 14 N
 1914-24

Resurvey of Part of North Boundary of Township 14 North, Range 4 West.

Chains No bearing trees available.
 Destroy the old stone mound and raise a mound of stone
 2 ft. base, $1\frac{1}{2}$ ft. high S. of cor.
 Land, rolling and mountainous.
 Soil, sandy and stony, 3rd and 4th rate.
 Timber, oak and juniper.
 Undergrowth, greasewood, scrub oak and ocotillo.

From the corner of secs. 4 and 5.
 S. $89^{\circ} 30'$ W., on true line, on N. bdy. of sec. 5, ($E.\frac{1}{2}$).
 Over mountainous land, thru dense undergrowth and scatter-
 ing timber..

Descend 75 ft. over W. slope to
 3.38 (80.00 chs. in westing from cor. of secs. 33 and 34).
 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins.
 in the ground and deposit a stone marked with a cross
 (X) at base of post for reestablished cor. of secs.
 32 and 33, only, marked on brass cap

T 15 N R 4 W
 S 32 | S 33
 S 5
 T 14 N R 4 W
 1924

No bearing trees available.
 Descend 39 ft. over W. slope.
 5.37 Bottom of gulch, course SW. Asc. 40 ft. over SE. slope.
 12.37 Point of spur, slopes SW.. Desc. 40 ft. over W. slope.
 16.40 Gulch, course SE. Asc. 110 ft. over E. slope.
 22.50 Spur, slopes SE. Desc. 60 ft. over SW. slope.
 30.37 Wash, .5 lks. wide, course S. Asc. 60 ft. over E. slope.
 35.37 Spur, slopes S. Desc. 90 ft. over W. slope.
 39.18 Wash, 8 lks. wide, course S. Asc. 28 ft. over E. slope to
 40.15 Intersect the reestablished $\frac{1}{4}$ sec. cor. of secs. 5 and
 32, which is an iron post, 1 in. in diam., projecting
 12 ins. above ground, firmly set, properly marked on
 brass cap and witnessed by a mound of stone N. No
 bearing trees.
 Alter this cor. monument to refer to the quarters of
 sec. 5, only, by changing marking on brass cap to
 read:

$\frac{1}{4}$ S 5
 1914-24

No bearing trees available.
 Destroy the old stone mound and raise a mound of stone
 2 ft. base, $1\frac{1}{2}$ ft. high S. of cor.
 Thence
 S. $89^{\circ} 30'$ W., on true line, on N. bdy. of sec. 5 ($W.\frac{1}{2}$)
 Over mountainous land, thru dense undergrowth and scatter-
 ing timber.

Asc. 112 ft. over E. slope to
 3.23 (40.00 chs. in westing from cor. of secs. 32 and 33).
 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in
 the ground to bed rock, deposit a stone marked with
 a cross (X) at base of post and raise a mound of
 stone around post for reestablished $\frac{1}{4}$ sec. cor. of
 sec. 32, only, marked on brass cap

$\frac{1}{4}$ S 32
 1924

Resurvey of Part of North Boundary of Township 14 North, Range 4 West.

- Chains No bearing trees available.
- 3.25 Spur, slopes S. Descend 130 ft. over W. slope.
- 9.47 Wash, 10 lks. wide, in ravine, course S. Asc. 110 ft. over SE. slope.
- 25.56 Spur, slopes S. Enter rolling land. Desc. 67 ft. over W. slope to sec. cor.
- 39.35 Intersect fence cor. from which wire fences extend S. 89° E. and S.
- 40.16 Intersect the reestablished cor. of secs. 5, 6, 31 and 32, which is an iron post 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap and witnessed by a mound of stone W. of cor. and two bearing trees:
- A cedar, 12 ins. in diam., S. 31° E., 80 lks. dist., marked T 14 N R 4 W S 5 B T.
- A cedar, 12 ins. in diam., S. 38½° W., 242 lks. dist., marked T 14 N R 4 W S 6 B T.
- Alter this cor. monument to refer to secs. 5 and 6 only, by changing marking on brass cap to read

	T 15 N	
	S 6	S 32
R 4 W		S 5
	T 14 N	
	1914-24	

Destroy the old stone mound west of cor.
 No change in the old bearing trees is required.
 Land, mountainous and rolling.
 Soil, stony, 3rd and 4th rate.
 Timber, oak and cedar.
 Undergrowth, greasewood and ocotillo.

- 3.07 S. 89° 30' W., on true line on N. bdy. of sec. 6 (E. ½). Over rolling land, through dense undergrowth. Desc. 20 ft. over W. slope to (80.00 chs. in westing from cor. of secs. 32 and 33. Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground for reestablished cor. of secs. 31 and 32, only, marked on brass cap

	T 15 N	R 4 W
	S 31	S 32
	S 6	
	T 14 N	R 4 W
	1924	

- 5.80 Descend 10 ft. over W. slope
 Wash, 5 lks. wide, course SW. Asc. 70 ft. over SE. slope
- 15.06 Spur, slopes S. Desc. 100 ft. over W. slope
- 28.46 Wash, 10 lks. wide, course SW. Thence over S. slope.
- 36.06 Wash, 30 lks. wide, 2 ft. deep, course SE. Asc. 40 ft. over NE. slope to
- 40.10 Intersect the reconstructed ¼ sec. cor. of secs. 6 and 31, which is an iron post, 1 in. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap and witnessed by a mound of stone N. No bearing trees.
- Alter this cor. monument to refer to the quarters of sec. 6, only, by changing marking on brass cap to read:

	¼ S 6
	1914-24

Resurvey of Part of North Boundary of Township 14 North, Range 4 West.

Chains Destroy the old mound of stone and raise a mound of stone
 .2 ft. base, 1½ ft. high, S. of cor.
 Thence S. 83° 41' W., on true line, on N. bdy. of sec. 6 (W. ½)
 Over mountainous land, thru dense undergrowth.
 Asc. 35 ft. over E. slope to corner.
 2.97 (40.00 chs. in westing from cor. of secs. 31 and 32).
 Set an iron post, 3 ft. long, 1 in. in diam., 15 ins. in
 the ground to bedrock, deposit a stone marked with
 a cross (X) at base of post and raise a mound of
 stone around post, for reestablished ¼ sec. cor. of
 sec. 31, only, marked on brass cap

¼ S 31
 1924

Ascend 140 ft. over NE. slope.
 17.35 Spur, slopes SE. Desc. 60 ft. over SW. slope.
 26.36 Wash, 15 lks. wide, course SE. Asc. 100 ft. over E.
 slope to
 39.39 Intersect the reconstructed cor. of Tps. 14 and 15 N.,
 Rs. 4 and 5 W., which is an iron post, 3 ins. in
 diam., projecting 12 ins. above ground, firmly set,
 properly marked on brass cap and witnessed by a mound
 of stone S. No bearing trees. This cor. monument
 retains its original reference and requires no
 alteration.
 Land, rolling and mountainous.
 Soil, gravelly and stony, 3rd and 4th rate.
 Timber, none.
 Undergrowth, greasewood and scrub oak.

Survey of part(Completion) of the South boundary of T 15 N., R 4 W.

Chains

From the reconstructed cor. of secs. 2 and 3, on N. bdy. of T 14 N., R 4 W., hereinbefore described East on a random line and at 152.57 chs., intersect random N. and S. line 572.70 chs. due south of the identified orig. sec. cor. on W. bdy. of sec. 7., T15N., R3W. hereinafter described.

At said point of intersection, Set an iron post 3 ft. long 3 ins. in diam. 27 ins. in the ground for cor. of T15N., R4W. only, marked on brass cap

T15N
R4W
S36

T14N R4W
S1
1924

from which,
A cedar 14 ins. in diam. bears N16°W. 434 lks. dist., marked T15N., R4W., S 36 BT.

No other bearing trees within limits.; Raise a mound of stone 2 ft. base, 1 1/2 ft. high NW. of cor.

Thence

West on true line on S. bdy. of sec. 36

Descend 96 ft. over SW. slope over stony hilly land, through dense oak brush undergrowth

24.10
40.00

Ravine 6 lks. wide, course NW.

Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base, 27 ins. in the ground for 1/4 sec. cor. of sec. 36 only, marked on brass cap

1/4 S 36
1924

80.00

Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the ground for cor. of secs. 35 and 36 only, marked on brass cap

T15N | R4W
S35 | S36

1924

Raise a mound of stone 2 ft. base, 1 1/2 ft. high N. of cor.

Land hilly.
Soil stony 3 rd. rate.
Timber, none.
Undergrowth, greasewood and oak brush.

40.00

West on true line on S. bdy. of sec. 35.

Descend 126 ft. over W. slope over stony hilly land, through dense greasewood and oak brush undergrowth.

Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base, 27 ins. in the ground for 1/4 sec. cor. of sec. 35 only, marked on brass cap

1/4 S35
1924

12. Survey of part (Completion) of the South boundary of T.15 N., R.4 W.

Chains	...
40.10	Ravine 5 lks. wide, 2 ft. deep, course SW.
72.57	Intersect the cor. of secs. 2 and 3, T.14 N., R.4 W., T.14 N., hereinbefore described.
	Thence S. 89° 34' W., one true line, on S. bdy. of sec. 35, sec. 35 continuing the measurement.
80.00	Intersect the reestablished cor. of secs. 34 and 35, Land rolling and hilly. Soil gravelly and stony, 2nd. and 3rd. rate. Timber, none. Undergrowth, greasewood and oak brush.

Survey of PART (Completion) of
East Boundary of Township 15 North., Range 4 West. 13

Chains From the orig. $\frac{1}{4}$ sec. cor. on the west bdy. of sec. 7 T15N., R. 34W., described in book B of this group, South, on a random line setting temp. sec. and $\frac{1}{4}$ sec. cors. alternately at intervals of 40.00 chs. until at 572.70 chs. Intersect E. and W. line at a point 152.57 chs. due east of the cor. of secs. 2 and 3, T14N., R. 4W. Cor. of T15N., on E. bdy. of sec. 25 only; Cor. of R. 4W. only established here as hereinbefore described. Thence from said township cor. North, on E. bdy. of sec. 36. Over broken W. slope through dense oak and greasewood brush undergrowth.

38.50 Dry gulch 6 lks. wide 10 ft. deep, course SW.
40.00 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for $\frac{1}{4}$ sec. cor. of sec. 36 only, marked on brass cap

$\frac{1}{4}$ S 36

1924

54.60 Raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high W. of cor. Telephone line from the Tonto Springs Ranger Station to Prescott Arizona, bears E. and W.

64.50 Gulch 6 lks. wide 2 ft. deep, course NW.
80.00 Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the ground for cor. of secs. 25 and 36 T15N., R4W. only, marked on brass cap

T15N
S25
S36
R4W

1924

Raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high W. of cor. Land, broken. Soil, stony, 3 rd. rate. No timber. Undergrowth, greasewood and oak brush.

North, on E. bdy. of sec. 25. Descend 161 ft. over broken stony W. slope, through dense greasewood and oak undergrowth.

17.70 Pipeline from spring E. of line bears E. and W.
18.50 Foot of descent in sand wash 30 lks. wide, course N70°W. Ascend 124 ft. over SE. slope of spur

37.40 Top of spur bears SW.; Desc. 39 ft. over NE. slope.
40.00 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for $\frac{1}{4}$ sec. cor. of sec. 25 only, marked on brass cap

$\frac{1}{4}$ S 25

1924

Raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high W. of cor. Ascend 50 ft. over SE. slope.

47.00 Descend 171 ft. over NW. slope
51.80 Wood road bears E. and W.
62.00 Foot of descent in sand wash 100 lks. wide, course S70°W.; Ascend 122 ft. over SE. slope.

Survey of PART (Completion) of
East Boundary of Township 15 N., Range 4 West.

Chains
80.00

Set an iron post 3 ft. long, 2 ins. in diam with marked stone at base, 27 ins. in the ground for cor. of secs. 24 and 25 only, marked on brass cap

T15N
S24
S25
R4W

1924

Land, broken and hilly.
Soil, stony, 3 rd. rate.
No timber.
Undergrowth, greasewood and oak brush.

North, on E. bdy of sec. 24.

Over broken stony W. slope, through dense oak and greasewood brush undergrowth.

8.00 Dim road in bottom of sand wash 25 lks. wide, course SW.; Road bears NE. and SW.; Asc. 90 ft. over SE. slope

15.50 Top of broken spur bears W.; Desc. 141 ft. over NW. slope.

40.00 Set an iron post 3 ft. long, 1 in. in diam. with marked stone at base, 27 ins. in the ground for $\frac{1}{4}$ sec. cor. of sec. 24 only, marked on brass cap

$\frac{1}{4}$ S 24

1924

40.50 Sand wash 25 lks. wide banks 2 ft. high, course N70° W. Ascend 115 ft. over SW. slope.

72.50 Top of ascent on spur slopes NW.; Desc. 69 ft. over NE. slope to

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the ground for established cor. of secs. 13 and 24 only, marked on brass cap

T15N
S13
S24
R4W

1924

Raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high W. of cor.
Land, broken and mountainous.

Soil, stony 3 rd. rate.

No timber.

Undergrowth, Greasewood and oak brush.

Chains

From reestablished cor. of secs. 13 and 24 only,
North on E. bdy. of sec. 13.
Descend NE. slope 70 ft. over stony mountainous land;
through oak and greasewood brush undergrowth
3.00 Foot of descent in sand wash, course N80°W.
6.50 Leave sand wash.; Ascend 140 ft. over SW. slope of spur.
14.00 Top of short spur bears W.; Desc. 30 ft. over N. slope.
17.20 Gulch 5 lks. wide, course SW.; Asc. 60 ft. over SE. slope.
25.00 Top of spur bears W.; Desc. 160 ft. over N. slope.
40.00 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in ground
for reestablished $\frac{1}{4}$ sec. cor. of sec. 13 only, marked on
brass cap

$\frac{1}{4}$ S 13 |
1924

from which

A juniper 10 ins. in diam. bears S0 $\frac{1}{4}$ °W. 4 lks. dist.,
marked $\frac{1}{4}$ S 13 BT.
A juniper 10 ins. in diam. bears S30°W. 5 lks. dist., marked
 $\frac{1}{4}$ S 13 BT.
65.00 Dry gulch 20 lks. wide, course N30°W. thence over W. slope
80.00 Set an iron post 3 ft. long, 2 ins. in diam. with marked stone
stone at base, 26 ins. in the ground for reestablished
cor. of secs. 12 and 13 only, marked on brass cap

T15N | T15N
S12 | R3W
S13 |
R4W

1924

Land, mountainous.
Soil, stony 3 rd. rate.
Timber, scattering juniper
Undergrowth, greasewood and oak brush.

North, on E. bdy. of sec. 12
Over rolling and broken stony mountainous land, through
scattering juniper timber and oak brush under-
growth.
2.50 Sand wash 20 lks. wide 2 ft. deep, course SW.
8.50 Drain 15 lks. wide 4 ft. deep, course SW.
31.40 Line of fence posts bears N80°E. and S80°W.
40.00 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in ground
for reestablished $\frac{1}{4}$ sec. cor. of sec. 12 only, R4 only,
marked on brass cap

$\frac{1}{4}$ S 12 |
1924

58.00 Raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high W. of cor.
71.00 Top of divide bears NW. and SE. thence over rolling land
75.80 Descend 70 ft. over NE. slope.
Rocky ravine 10 lks. wide, course N30°W.

Resurvey of PART (North half) of
East Boundary of Township 15 N., Range 4 West.

Chains

80.00 Set an iron post 3 ft. long, 2 ins. in diam. with marked stone at base, 10 ins. in the ground to bedrock, supported in a mound of stone for reestablished cor. of secs. 1 and 12, only, marked on brass cap

T15N	T15N
S1	R3W
S12	
R4W	

1924

Land rolling broken, and mountainous.
Soil stony 3 rd. rate.
Timber, scattering juniper.
Undergrowth, oak and greasewood brush.

North on E. bdy. of sec. 1 T15N., R4W.

Descend 160 ft. over NW. slope, through scattering juniper timber and brush undergrowth.

6.20 Wire fence bears N29°W. and S29°E.

32.50 Sand wash 20 lks. wide 3 ft. deep, course NW.

40.00 Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base 27 ins. in ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 1 only, R4W. only, marked on brass cap

$\frac{1}{4}$ S 1	
-------------------	--

1924

45.00 Top of low ridge bears N60°E. and S60°W. Desc. NW. slope

80.00 Set an iron post 3 ft. long, 3 ins. in diam. 27 ins. in the ground for original cor. of Fractional T. 15 $\frac{1}{2}$ N., R. 4 W. (SE. cor.) and reestablished cor. of T. 15 N., R. 4 W. (NE. cor.) marked on brass cap

T15 $\frac{1}{2}$ N	T15N
R4W	R3W
S36	
S 1	
T15N	

1924

from which,

A juniper, 12 ins. in diam., bears N86 $\frac{3}{4}$ °W, 139 lks. dist., marked T15 $\frac{1}{2}$ °N., R4W., S36 BT.

A juniper, 30 ins. in diam., bears S15 $\frac{3}{4}$ °W, 135 lks. dist., marked T15N., R4W., S 1 BT

Land, rolling and hilly.

Soil, sandy and stony 2nd. and 3rd. rate.

Timber, scattering juniper.

Undergrowth, greasewood brush and oak.

Note:

The reestablished cors. on E. bdy. of T. 15 N., R. 4 W. described in the foregoing notes, are approximately 213 chs. south of their original positions when they were identical with cors. referring to areas E. of line.

chains

This township boundary was surveyed due North by P. Contzen U.S.D.S. in 1897, establishing $\frac{1}{4}$ sec. and sec. cors. alternately thereon at intervals of 40 chs, with common reference to areas in Ts. 15 N., Rs. 4 & 5 W., and establishing a closing cor. of said Tps. where the range line intersected the S. bdy. of T. 15 N., R. 5 W.

No retracement or resurvey of the range line thru T. 15 N. is of record.

The following notes describe a resurvey of that portion of the range line which forms the amended West bdy. of T. 15 N., R. 4 W.

In this resurvey the original sec. and $\frac{1}{4}$ sec. cor. monuments on the line are altered to refer to areas in T. 15 N., R. 5 W. only and a complete set of sec. and $\frac{1}{4}$ sec. cors. referring to areas in T. 15 N., R. 4 W. only are reestablished in alinement between the original cors.

The cor. of secs. 30 & 31 is reestablished at point where a Sectional Correction Line surveyed due West thru T. 15 N., R. 4 W. intersects the range line; the $\frac{1}{4}$ sec. cor. of sec. 31 is reestablished at 40 chs. in southing from said sec. cor.; the remaining $\frac{1}{4}$ sec. and sec. cors. are reestablished alternately at intervals of 40 chs. in northing counting from same sec. cor.; and the NW. cor. of T. 15 N., R. 4 W. is reestablished on the range line at 400 chs. in northing therefrom.

Retracement for Resurvey.

From cor. of Ts. 14 & 15 N., Rs. 4 & 5 W.

40.26 North, on random line, on E. bdy. of sec. 36 ($S. \frac{1}{2}$)
Fall 2 lks. W. of original $\frac{1}{4}$ sec. cor. of secs. 31 and 36, hereinafter described.

True course and dist. of $S. \frac{1}{2}$ of E. bdy. of sec. 36 are therefore, $N. 0^\circ 2' E.$, 40.26 chs.

Thence

40.32 North, on random line, on E. bdy. of sec. 36 ($N. \frac{1}{2}$)
Fall 2 lks. W. of original cor. of secs. 25, 30, 31 & 36, hereinafter described.

True course and dist. of $N. \frac{1}{2}$ of E. bdy. of sec. 36 are therefore, $N. 0^\circ 2' E.$, 40.32 chs.

40.20 North, on random line, on E. bdy. of sec. 25 ($S. \frac{1}{2}$)
Intersect original $\frac{1}{4}$ sec. cor. of secs. 25 & 30, hereinafter described.

True course and dist. of $S. \frac{1}{2}$ of E. bdy. of sec. 25 are therefore, North, 40.20 chs.

Thence

40.25 North, on random line, on E. bdy. of sec. 25 ($N. \frac{1}{2}$)
Fall 2 lks. W. of original point for cor. of secs. 19, 24, 25, & 30, hereinafter described.

True course and dist. of $N. \frac{1}{2}$ of E. bdy. of sec. 25 are therefore, $N. 0^\circ 2' E.$, 40.25 chs.

40.12 North, on random line, on E. bdy. of sec. 24 ($S. \frac{1}{2}$)
Fall 2 lks. E. of original $\frac{1}{4}$ sec. cor. of secs. 19 & 24, hereinafter described.

True course and dist. of $S. \frac{1}{2}$ of E. bdy. of sec. 24 are therefore, $N. 0^\circ 2' W.$, 40.12 chs.

Thence

40.34 North, on random line, on E. bdy. of sec. 24 ($N. \frac{1}{2}$)
Fall 11 lks. E. of original cor. of secs. 13, 18, 19 & 24, hereinafter described.

True course and dist. of $N. \frac{1}{2}$ of E. bdy. of sec. 24 are therefore, $N. 0^\circ 9' W.$, 40.34 chs.

40.37 North, on random line, on E. bdy. of sec. 13 ($S. \frac{1}{2}$)
Fall 6 lks. E. of original $\frac{1}{4}$ sec. cor. of secs. 13 & 18, hereinafter described.

True course and dist. of $S. \frac{1}{2}$ of E. bdy. of sec. 13 are there-

- chains
- fore, N.0° 5'W., 40.37 chs.
Thence
- 40.27 North, on random line, on E. bdy. of sec. 13 (N. $\frac{1}{2}$)
Fall 2 lks. E. of original cor. of secs. 7, 12, 13 & 18, hereinafter described.
True course and dist. of N. $\frac{1}{2}$ of E. bdy. of sec. 13 are therefore, N.0° 2'W., 40.27 chs.

- 40.31 North, on random line, on E. bdy. of sec. 12 (S. $\frac{1}{2}$)
Intersect original $\frac{1}{4}$ sec. cor. of secs. 7 & 12, hereinafter described.
True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec. 12 are therefore, North, 40.31 chs.
Thence
- 40.21 North, on random line, on E. bdy. of sec. 12 (N. $\frac{1}{2}$)
Fall 2 lks. W. of original cor. of secs. 1, 6, 7 & 12, hereinafter described.
True course and dist. of N. $\frac{1}{2}$ of E. bdy. of secs. 12 are therefore, N.0° 2'E., 40.21 chs.

- 40.13 North, on random line, on E. bdy. of sec. 1 (S. $\frac{1}{2}$)
Fall 5 lks. W. of original $\frac{1}{4}$ sec. cor. of secs. 1 & 6, hereinafter described.
True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec. 1 are therefore, N.0° 4'E., 40.13 chs.
Thence
- 157.50 North, on random line, on E. bdy. of sec. 1 (N. $\frac{1}{2}$)
Intersect original closing cor. of Ts. 15 N., Rs. 4 & 5 W., on S. bdy. of sec. 36, T. 16 N., R. 5 W., described in Book "D" of this group.
True course and dist. of N. $\frac{1}{2}$ of E. bdy. of sec. 1 are therefore, North, 157.50 chs.

RESURVEY.

-
- From cor. of Ts. 14 & 15 N., Rs. 4 & 5 W., hereinbefore described,
N.0° 2'E., on true line, on W. bdy. of sec. 31
Over mountainous land, thru scattering timber and dense undergrowth.
- 37.22 Descend 109 ft. over E. and NE. slopes
Wash, 10 lks. wide, course E. Enter rolling land.
Ascend 18 ft. over SE. slope to
- 40.26 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 31 and 36, which is a granite stone, 9x4x6 ins. above ground, firmly set, marked $\frac{1}{4}$ on W. face and witnessed by a mound of stone W. of cor. No bearing trees.
This cor. monument now refers to the quarters of sec. 31 only, but no alteration or reconstruction of same is necessary.
Continue line and measurement
- 44.38 Ascend gradually over SE. slope to
(40.00 chs. in southing from cor. of secs. 30 and 31)
Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post and raise a mound of stone around post, for reestablished $\frac{1}{4}$ sec. cor. of sec. 31 only, marked on brass cap

Resurvey of the West Boundary of Township 15 North., Range 4 West

Chains

1/4 S31

1924

58.38 Top of low divide, bears NE. and SW.; Descend 28 ft. over NE. slope.

73.88 Sand wash 10 lks. wide, course W.; Ascend 17 ft. over stony SE. slope.; Enter scattering juniper timber

80.58 Intersect the orig. cor. of secs. 25, 30, 31, and 36, which is a granite stone 6x8x10 ins. above ground firmly set, properly marked and witnessed by one juniper bearing tree NW. and mound of stone W. of cor.

No change in the marking of cor. monument or the position and marking of the cor. accessories is necessary, in order that this cor. may refer to secs. 25 and 36, T15N., R5W. only.

Thence North, on true line, on W. bdy. of sec. 31, continuing measurement.

84.38 Point of intersection of Sectional Correction line bet. secs. 30 and 31, T15N., R4W.

Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the ground for reestablished cor. of secs. 30 and 31, T15N., R4W., marked on brass cap

T15N	T15N
S25	S30
R5W	S31
	R4W

1924

Raise a mound of stone 2 ft. base, 1 1/2 ft. high E. of cor. Land rolling mountains. Soil stony 2nd. and 3rd. rate. Timber, scattering juniper. Undergrowth oak and greasewood brush.

North on true line on W. bdy. of sec. 30

Ascend 60 ft. over SE. slope, over rolling mountainous land, through scattering juniper timber and dense oak and greasewood brush undergrowth.

16.30 Top of ascent; Descend 30 ft. over N. slope

18.70 Foot of descent.; Ascend 52 ft. over S. slope.

33.90 Top of spur bears E.; Descend 205 ft. over NE. slope.

36.40 Intersect the orig. 1/4 sec. cor. of secs. 25 and 30, which is a granite stone 6x10x10 ins. above ground, firmly set, properly marked, and witnessed by two juniper bearing trees, one each SE and SW. of cor.

Change this cor. to a quarter cor. of sec. 25, T15N., R5W. as follows; Obliterate marks "1/4 S" on SE. bearing tree and scribe the section number on the SW. bearing tree.

Thence N 0°02' E., on true line, on W. bdy. of sec. 30, continuing measurement.

40.00 Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base, 10 ins. in the ground to bedrock, supported in a mound of stone for reestablished 1/4 sec. cor. of sec. 30, T15N., R4W. marked on brass cap

Resurvey of the West Boundary of Township 15 North., Range 4 West.

20

Chains

 $\frac{1}{4}$ S30

1924

- No trees within limits.
- 75.40 Bottom of canyon.; Cross sand wash 70 lks. wide, banks 3 ft. high, course W. thence over bottom land in bottom of canyon
- 76.65 Intersect true point for cor. of secs. 24 and 25, ~~24 and 25, sec 30~~ Thence, N 0°02' W, on true line, continuing measurement.
- 77.00 Road in canyon, bears E. and W.
- 79.15 Intersect the orig. witness cor. to cor. of secs. 19, 24, 25, and 30, which is a granite stone 6x8x6 ins. above ground, firmly set, properly marked and witnessed by two bearing trees, one each NE. and NW. with two pits SE. and SW. and mound of earth W.
- Change this cor. to a witness cor. to cor. of secs. 24 and 25, T15N, R5W, only as follows;
- Obliterate the section number on the NE. bearing tree and destroy the SE. pit.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the ground for reestablished cor. of secs. 19 and 30, T15N., R4W., marked on brass cap

T15N	T15N
S24	S19
R5W	S30
	R4W

1924

- from which,
- An oak 8 ins. in diam. bears N65°E 67 lks. dist., marked T15N., R4W., S19 BT.
- An oak 10 ins. in diam. bears S84°E. 90 lks. dist., marked T15N., R4W., S30 BT.
- Land rolling and mountainous.
- Soil sandy and stony 2nd. and 3rd. rate.
- Timber oak and juniper.
- Undergrowth, juniper, greasewood, and oak brush.

- N 0°02' W. on true line on W. bdy. of sec. 19.
- Ascend 120 ft. over stony SW. slope over mountainous land, through scattering oak and juniper timber and oak brush undergrowth.
- 10.50 Top of spur bears W.; Desc. 30 ft. over N. slope.
- 19.80 Ravine 15 lks. wide, course SW.; Asc. 40 ft. over SW. slope.
- 26.00 Top of spur bears W.; Desc. 30 ft. over N. slope.
- 36.77 Intersect the orig. $\frac{1}{4}$ sec. cor. of secs. 19 and 24, which is a granite stone 6x6x8 ins above ground, firmly set, properly marked and witnessed by two juniper bearing trees, one each NW. and SE. of cor.
- Change this cor. to a quarter cor. of sec. 24 T15N., R5W. only as follows;
- Obliterate the marks "19" on SE. bearing tree and scribe the section numerals "24" on the NW. bearing tree.
- Thence
- 40.00 N 0°09' W, on true line, on W. bdy. of sec. 19, continuing measurement. Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of sec. 19 T15N., R4W., marked on brass cap

Resurvey of the West Boundary of Township 15 North., Range 4 West.

Chains

1/4 S19
1924

from which

An oak 6 ins. in diam. bears N37°E.56 lks. dist.,
marked 1/4 S19 BT.
A juniper 40 ins. in diam. bears N55°E.18 lks. dist.,
marked 1/4 S19 BT.
41.20 Dry ravine 10 lks. wide, course SW. Asc. 60 ft. over SE. slope
70.00 Top of low divide, bears NE. and SW.; Desc. gradually over
NW. slope.
74.00 Drain 4 lks. wide, course NW. thence on W. slope.
77.11 Intersect the orig. cor. of secs. 13, 18, 19, and 24, which is
a granite stone 6x6x6 ins. above ground, firmly
set, properly marked and witnessed by two
juniper bearing trees, one each SE. and SW, with
one pit NE. and NW. of cor. and earth mound W.
Change this cor. to a cor. of secs. 13 and 24, T15N., R5W. only
as follows;
Obliterate the NE. pit and marks "S19" on SE. bearing tree,
and raise a mound of stone 2 ft. base, 1 1/2 ft.
high W. of cor.
Thence
N 0°05' W. on true line, continuing measurement.
80.00 Set an iron post 3 ft. long, 2 ins. in diam. with marked
stone at base, 27 ins. in the ground for
reestablished cor. of secs. 18 and 19, T15N., R4W.,
marked on brass cap

T15N	T15N
S13	S18
R5W	S19
	R4W

1924

No trees suitable for bearing trees available.
Land broken and mountainous.
Soil stony 2nd. and 3rd. rate.
Timber, scattering oak and juniper.
Undergrowth, greasewood, and oak brush.

N 0°05' W. on true line on W. bdy. of sec. 18
Over rolling stony land, through scattering juniper
timber and oak brush undergrowth.
14.70 Sand wash 100 lks. wide, 2 ft. deep, course SW.; Asc. 70 ft.
over SE. slope.
37.48 Intersect the orig. 1/4 sec. cor. of secs. 13 and 18, which
is a granite stone 6x8x8 ins. above ground,
firmly set, properly marked and witnessed by
two pits and mound of earth W.
No change in the marks on this cor. monument or in the
cor. accessories are necessary at this place
in order that the same may become a quarter
cor. referring to sec. 13, T15N., R5W. only.
Thence
N 0°02' W. on true line, on W. bdy. of sec. 18, continuing measurement.
40.00 Set an iron post 3 ft. long, 1 in. in diam. with marked
stone at base, 27 ins. in the ground for
reestablished 1/4 sec. cor. of sec. 18 T15N., R4W.
marked on brass cap

Chains

1/4 S18

1924

60.50 Top of ~~stone cap~~ bears S80°E.; Descend 63 ft. over NE. slope.

77.75 Intersect the original cor. of secs 7, 12, 13, and 18, which is a granite stone 10x5x5 ins. above ground, firmly set, properly marked and witnessed by a mound of stone W.

No change in the marking of the cor. monument or position of the cor. accessories is necessary at this place, in order that this cor. may refer to secs. 12 and 13 T15N., R5W. only.

Thence

80.00 North, on true line, on W. bdy. of sec. 18, continuing measurement. Set an iron post 3 ft. long, 2 ins. in diam. with marked stone at the base, 6 ins. in the ground to bedrock supported in a mound of stone for reestablished cor. of secs. 7 and 18, T15N., R4W marked on brass cap.

T15N	T15N.
S12	S7
R5W	S18
	R4W

1924

Land rolling and hilly.
Soil stony 3 rd. rate.
Timber scattering juniper and oak.
Undergrowth oak brush.

38.06

North on true line on W. bdy. of sec. 7. Along E. slope over broken stony land, through scattering oak and juniper timber and brush undergrowth.

Intersect the orig. 1/4 sec. cor. of secs. 7 and 12, which is a granite stone 4x10x7 ins. above ground, firmly set, properly marked and witnessed by one juniper bearing tree SE and two pits and mound of earth, W.

Change this cor. to a quarter sec. cor. of sec. 12, T15N., R5W. only as follows.

Obliterate marks "1/4 S on the bearing tree.

Thence

40.00

N 0°02'E., on true line, on W. bdy. of sec. 7, continuing measurement. Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for reestablished 1/4 sec. cor. of sec. 7, T15N., R4W. only, marked on brass cap

1/4 S7

1924

from which,

An oak 6 ins. in diam. bears N47 3/4° E. 18 lks. dist. marked 1/4 S7 BT.

An oak 6 ins. in diam. bears S85 1/2° E. 53 lks. dist., marked 1/4 S7 BT.

Resurvey of the West Boundary of Township 15 North., Range 4 West.

Chains

40.50 Bottom of small canyon, cross brook, 3 lks. wide, water clear, 1 in. deep, course S30°E.; Ascend 130 ft. over SW. slope over broken stony land.

78.27 Intersect the orig. cor. of secs. 1, 6, 7, and 12, which is a granite stone 8x10x8 ins. above ground, firmly set, properly marked and witnessed by one juniper bearing tree NE. and three pits, one each SE, SW, and NW. with mound of earth W.

Change this cor. to cor. of secs. 1 and 12 T15N., R5W. only as follows;

Obliterate the SE. pit and marks "S6" on the bearing tree. Thence

80.00 N 0°04'E., on true line, on W. bdy. of sec. 7, continuing measurement. Set an iron post 3 ft. long, 2 ins. in diam. with marked stone at base, 27 ins. in the ground for reestablished cor. of secs. 6 and 7, T15N., R4W only, marked on brass cap

T15N	T15N
S1	S6
R5W	S7
	R4W

1924

No trees within limits.

Land broken and hilly.

Soil stony 3 rd. rate.

Timber scattering juniper and cedar and oak.

Undergrowth, oak and juniper brush.

N 0°04'E. on true line on W. bdy. of sec. 6. Ascend 75 ft. over SE. slope over stony mountainous land, through oak brush undergrowth.

114.00 Top of divide bears E. and W.; Desc. 23 ft. over NE. slope

29.00 Ravine 4 lks. wide, course S70°E.; Ascend 80 ft. over S. slope.

38.40 Intersect the orig. 1/4 sec. cor. of secs. 1 and 6, which is a granite stone 6x6x8 ins. above ground, firmly set, properly marked and witnessed by two pits N. and S. and mound of earth W.

No change in the marks on the cor. monument or position of the accessories is necessary in order that this cor. may refer to areas in sec. 1 T15N., R5W. only.

Thence

40.00 North, on true line, on W. bdy. of sec. 6, continuing measurement. Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base, 10 ins. in the ground to bedrock supported in a mound of stone for reestablished 1/4 sec. cor. of sec. 6 T15N., R4W. only, marked on brass cap

1/4 S6

1924

45.40 This cor. is on spur bears SE.; Desc. 46 ft. over NE. slope Ravine 10 lks. wide, course E. 10 chs. thence SE.; Ascend 120 ft. over S. slope.

61.40 Top of ridge bears NE. and SW.; Desc. 40 ft. over N. slope

66.50 Gulch 15 lks. wide 5 ft. deep, course W.; Ascend 120 ft. over S. slope.

80.00 Set an iron post 3 ft. long, 3 ins. in diam. 27 ins. in

Chains

the ground for reestablished cor. of T15N., R4W.
 (SW cor) and original cor. of Fracc. T15 $\frac{1}{2}$ N., R4 Ws (SW cor.)
 marked on brass cap

T15N
 S1
 R5W

T15 $\frac{1}{2}$ N
R4W
S31
S6
T15N
R4W

1924

Raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high E. of cor.
 Land hilly and mountainous.
 Soil stony 3 rd. rate.
 Timber scattering oak and juniper.
 Undergrowth oak and manzanita brush.

Survey of South Bdy. of Frac. Township 15 1/2 N., Range 4 West and Independent Resurvey of the North Boundary of Township 15 N., Range 4 W 25

Chains

From the reestablished cor. of T. 15 N., R. 4 W. (NE. cor.), and original cor. of Frac. T. 15 1/2 N., R. 4 W. (SE. cor.), hereinbefore described,

West, on a random line along new N. bdy. of T. 15 N., R. 4 W. setting temp. 1/4 sec. and sec. cors. alternately at regular intervals of 40.00 chs., and at 475.10 chs. fall 41 lks. N. of reestablished cor. of T. 15 N., R. 4 W. (NW. cor.) and original cor. of Frac. T. 15 1/2 N., R. 4 W. (SW. cor.) hereinbefore described.

The falling answers to a correction of 0° 3' or 08 lks. S. per mile counting from the NE. cor. of the Tp.

Thence

N. 89° 57' E. on true line bet. secs. 6 and 31 marking and blazing true line

Descend 60 ft. over SE. slope over mountainous land, through dense oak and manzanita brush undergrowth.

- 6.10 Ravine 10 lks. course SW.; asc. 70 ft. over NW. slope;
- 14.40 Top of spur bears SE.; Desc. 180 ft. over NE. slope thru. scattering juniper timber, bears NE. and S.
- 35.10 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for reestablished 1/4 sec. cor. of sec. 6, and original 1/4 sec. cor. of sec. 31, marked on brass cap

S 31

1/4 S 6

1924

from which,

- A cedar 6 ins. in diam. bears N 7° W. 55 lks. dist., marked 1/4 S 31 BT.
- A cedar 5 ins. in diam. bears S 53° E. 122 lks. dist., marked 1/4 S 6 BT.
- 47.10 Sand wash 20 lks. wide, banks 2 1/2 ft. high, course SE.; Ascend 120 ft. over SW. slope.
- 75.10 Set an iron post 3 ft. long; 2 ins. in diam. 27 ins. in the ground for reestablished cor. of secs. 5 and 6 T. 15 N., R. 4 W. and cor. of secs. 31 and 32, T. 15 1/2 N., R. 4 W., marked on brass cap

T 15 1/2 N.	R 4 W
S 31	S 32
S 6	S 5
T 15 N.	
1924	

from which,

- A juniper 5 ins. in diam. bears N 34 1/2° E. 153 lks. dist., marked T 15 1/2 N., R. 4 W., S 32 BT.
- A juniper 9 ins. in diam. bears S 30 1/4° E. 137 lks. dist., marked T 15 N., R. 4 W., S 5 BT.
- A juniper 24 ins. in diam. bears S 11 1/2° W. 159 lks. dist., marked T 15 N., R. 4 W., S 6 BT.
- A juniper 16 ins. in diam. bears N 82 1/2° W. 17 lks. dist., marked T 15 1/2° N., R. 4 W., S 31 BT.

Land mountainous.
Soil stony 2nd, and 3rd. rate.
Timber juniper and cedar.
Undergrowth, oak and juniper brush.

N. 89° 57' E. on true line bet. secs. 5 and 32.
Ascend 30 ft. over NW. slope of spur over stony mountainous land, through cedar and juniper timber and dense brush undergrowth.

- 2.00 Summit of spur bears SE.; Descend 240 ft. over NE. slope
- 21.00 Bottom of rocky ravine 10 lks. wide, course SE.; Ascend 76 ft. over SW. slope

Chains
40.00

Set an iron post 3 ft. long, 1 in. in diam. with marked stone at base, 10 ins. in the ground to bedrock, supported in a mound of stone for reestablished $\frac{1}{4}$ sec. cor. of sec. 5 T15N., R4W. and $\frac{1}{4}$ sec. cor. of sec. 32, T15 $\frac{1}{2}$ N., R4W., marked on brass cap

$\frac{1}{4}$ $\frac{S\ 32}{S\ 5}$

1924

No trees suitable for bearing trees available.

42.10 Top of ascent on SW. slope; Descend about 18 ft. over SE. slope.

45.70 Gulch 20 lks. wide, course NE. Ascend 24 ft. over NW. slope.

52.10 Top of low divide; bears NE. and SW.; Descend over SE. slope

57.00 Bottom of draw, course S70°E.; Ascend 23 ft. over SW. slope

70.00 Top of ascent on S. slope of spur; Descend 23 ft. over SE. slope to

80.00 Set an iron post 3 ft. long, 2 ins. in diam. with marked stone at base, 6 ins. in the ground to bedrock, supported in a mound of stone for reestablished cor. of secs. 4 and 5 T15N., R4W. and cor. of secs. 32 and 33, T15 $\frac{1}{2}$ N., R4W., marked on brass cap

T15 $\frac{1}{2}$ N	R 4 W.
S 32	S 33

S 5	S 4
-----	-----

T15N

1924

No trees suitable for bearing trees available.

Note; From this cor. the orig. cor. of secs. 4, 5, 4A, and 5A T15N., R4W. which is a granite stone 16x12x8 ins. above ground, firmly set, properly marked and witnessed by one bearing tree and mound of stone N. bears N16°35'E. 18.50 chs. dist.

Destroy the old cor. and witness mound and obliterate the marks on the old bearing tree.

Land mountainous.

Soil stony 3 rd. and 4 th. rate.

Timber scattering, oak, cedar, and juniper.

Undergrowth, manzanita, juniper, and oak brush.

N. 89°57'E. on true line bet. secs. 4 and 33.

Descend 166 ft. over SE. slope over broken stony mountainous land, through scattering, oak, juniper, and cedar timber and brush undergrowth.

19.70 Wire fence bears N12°E. and S12°W.

40.00 The point for $\frac{1}{4}$ sec. cor. falls in bed of sand wash 15 lks. wide, course NE. wher natural causes would insure the destruction of the cor., therefore continue line and measurement and at

40.50 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for witness cor. to the reestablished $\frac{1}{4}$ sec. cor. of sec. 4 T15N., R4W., and to the $\frac{1}{4}$ sec. cor. of sec. 33 T15 $\frac{1}{2}$ N., R4W., marked on brass cap

WC $\frac{1}{4}$ $\frac{S\ 33}{S\ 4}$

1924

from which

Survey of South Bdy. of Frac. Township 15 $\frac{1}{2}$ North, Range 4 West and Independent Resurvey of the North Boundary of Township 15 N., Range 4 W. 27

Chains

A juniper 46 ins. in diam. bears N64 $\frac{1}{4}$ °E. 126 lks. dist., marked WC $\frac{1}{4}$ S 33 BT.
A juniper 16 ins. in diam. bears S41°W. 13 lks. dist., marked WC $\frac{1}{4}$ S 4 BT.

Note; From this cor. the orig. $\frac{1}{4}$ sec. cor. of secs. 4 and 4A T15N., R4W., which is a juniper post 2 ins. sq. 18 ins. long, loosely set in small mound of stone, marked $\frac{1}{4}$ S. on N. face.; bears N17°25'E. 16.10 chs. dist.

Destroy all evidence of this cor.

Ascend 57 ft. over NW. slope of spur.

51.00
53.00
68.00

Leave timber and brush undergrowth, bears NE. and SW.

Top of spur bears NE.; Descend 70 ft. over SE. slope

Foot of descent.; Leave hilly land, bears NE. and SW.;


Enter level land. Road from Draper's ranch to the "Toohey" ranch in T15 $\frac{1}{2}$ N., R4W. bears NE. and SW.

76.50
78.25
80.00

Wash 250 lks. wide 3 ft. deep, course NE.

Corral fence bears N about 30 lks. and S 200 lks. dist.

Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the ground for reestablished cor. of secs. 3 and 4, T15N., R4W. and secs. 33 and 34 T15 $\frac{1}{2}$ N., R4W., marked on brass cap



from which,

An oak 20 ins. in diam. bears N64 $\frac{1}{2}$ °E. 184 lks. dist., marked T15 $\frac{1}{2}$ °N., R4W., S 34 BT.; No other trees within limits.

Raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high W. of cor. From this cor. the junction of E. and W. corral fence with side of circular corral bears N12°34'W. 185 lks dist.

Land level, hilly, and mountainous.
Soil sandy and stony 2nd. 3rd., and 4th. rate.
Timber scattering oak, cedar, and juniper.
Undergrowth, oak and juniper brush.

N. 89°57'E. on true line bet. secs. 3 and 34.

.80
3.20
6.22

Ascend gradually over rolling stony NW. slope

Corral fence bears N180 lks. dist. and S. 200 lks. dist.

Road from Skull Valley to "Toohey's" ranch, bears NW. and SE.

Intersect W. bdy. of Tract No. 38, T15N., R4W. 14.48 chs.

S. 0°30'W. of true point for cor. No. 6 of said tract, identical with true point for Cor. No. 5 of Tract No. 39 of

Frac. T15 $\frac{1}{2}$ N., R4W., hereinafter described. Thence across Tract No. 38

8.90

Wire fence bears N12 $\frac{1}{2}$ °E. and S12 $\frac{1}{2}$ °W.; Enter scattering oak and juniper timber and brush undergrowth, bears NW. and SE.

23.00
28.80
29.00

Top of spur bears NE.; Descend 34 ft. over SE. slope.

Road in bottom of sand wash, bears N15°W. and S15°E.

Center of sand wash 40 lks. wide, course N15°W.; Ascend 52 ft. over SW. slope.

40.00

Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of sec. 3 T15N., R4W. and $\frac{1}{4}$ sec. cor. of sec. 34, T15 $\frac{1}{2}$ N., R4W., marked on brass cap

Survey of South Bdy. of Frac. Township 15¹/₂ North, Range 4 West and
 28 Independent Resurvey of the North Boundary of Township 15 N., Range 4 W.

Chains

$\frac{1}{4}$ S 34
 S 3

1924

- from which,
- An oak 10 ins. in diam bears N17¹/₂°E. 179 lks. dist.,
 marked $\frac{1}{4}$ S 34 BT.
- An oak 8 ins. in diam. bears S81¹/₂°E. 70 lks. dist.,
 marked $\frac{1}{4}$ S 3 BT.
- 54.00 Top of low spur bears N. and S. thence over rolling land
 on top of spur.
- 66.50 Dim road bears NE. and SW.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the
 ground for reestablished cor. of secs. 2 and 3
 T15N., R4W. and cor. of secs. 34 and 35 of T15¹/₂N.
 R4W., marked on brass cap

T15 ¹ / ₂ N	R4W
S34	S35
S 3	S 2

T15N
 1924

- from which,
- A cedar 18 ins. in diam. bears N42°E. 333 lks. dist.,
 marked T15¹/₂N., R4W., S35 BT.
- A juniper 28 ins. in diam. bears S18¹/₂°E. 281 lks. dist.,
 marked T15N., R4W., S2 BT.
- A juniper 14 ins. in diam. bears S80¹/₂°W. 110 lks. dist.,
 marked T15N., R4W., S3 BT.
- A juniper 16 ins. in diam. bears N70°W. 200 lks. dist.,
 marked T15¹/₂N., R4W., S34 BT.
- Land rolling and hilly.
- Soil sandy and stony 2nd. and 3rd. rate.
- Timber oak, cedar, and juniper.
- Undergrowth oak and juniper brush.

- N. 89°57'E. on true line bet. secs 2 and 35.
 Over rolling stony land, through scattering juniper timber
 and brush.
- 1.50 Top of divide bears NW. and SE.; Descend 153 ft. over NE.
 slope.
- 7.42 Intersect the E. bdy. of Tract No. 38 of T15N., R4W. 19.44 chs.
 S. 0°26'E. of cor. No. 11 of said tract, herein-
 after described. Leave Tract No. 38.
- 11.80 Drain, 4 lks. wide, course NE.
- 24.50 Drain, 5 lks. wide, course N70°E.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam, 10 ins. in
 the ground to bedrock, supported in a mound of
 stone for reestablished $\frac{1}{4}$ sec. cor. of sec. 2,
 T15N., R4W. and $\frac{1}{4}$ sec. cor. of sec. 35 T15¹/₂N.,
 R4W., marked on brass cap

$\frac{1}{4}$ S 35
 S 2

1924

from which

Survey of South Bdy. of Frac. Township 15 $\frac{1}{2}$ North, Range 4 West and Independent Resurvey of the North Boundary of Township 15 North., Range 4 West 29

Chains

An oak, 4 ins. in diam. bears N9 $\frac{3}{4}$ °W. 37 lks. dist., marked $\frac{1}{4}$ S 35 BT.

Acedar, 38 ins. in diam. bears S2 $\frac{1}{2}$ °W. 261 lks. dist., marked $\frac{1}{4}$ S 2 BT.

43.50 Wash 15 lks. wide, course NE.; Ascend 30 ft. over NW. slope.

51.00 Top of spur bears NE.; Descend 70 ft. over SE. slope.

65.00 Leave timber and dense undergrowth, bears NE. and SW.

71.30 Ravine 4 lks. wide, course NE.

73.20 Ravine 20 lks. wide, course N.

75.25 Sand wash 40 lks. wide, course N30°W.; Ascend about 15 ft. over stony SW. slope

80.00 Set an iron post 3 ft. long, 2 ins. in diam. with marked stone at base, 12 ins. in the ground to bedrock, supported in a mound of stone for reestablished cor. of secs. 1 and 2, T15N., R4W. and cor. of secs. 35 and 36 of T15 $\frac{1}{2}$ N., R4W., marked on brass cap

T15 $\frac{1}{2}$ N	R4W
S35	S36
S2	S1

T15N.
1924

Cor. No. 3 of Tract No. 37, T15N., R4W. bears N39°23'E. 19.36 chs. dist.

Land rolling and hilly.

Soil stony 2nd. and 3rd. rate.

Timber oak, cedar, and juniper.

Undergrowth, oak and juniper brush.

12.51 N. 89°57'E. on true line, bet. secs. 1 and 36 Over rolling stony land on SW. slope.

21.00 Intersect W. bdy. of Tract No. 37 of T15N., R4W. 14.96 chs. S. 0°53'E. of Cor. No. 3, hereinafter described, then across Tract No. 37. Road from Skull Valley to Prescott Arizona, bears N10°E. and S10°W.

28.00 Leave rolling land bears N. and S.; Enter level land.

40.00 Set an iron post 3 ft. long, 1 in. in diam. with marked stone at base, 27 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of sec. 1 of T15N., R4W. and $\frac{1}{4}$ sec. cor. of sec. 36 of T15 $\frac{1}{2}$ N., R4W. marked on brass cap

$\frac{1}{4}$ S 36
S 1

1924

from which

40.60 A juniper 5 ins. in diam bears N29°E. 200 lks. dist., marked $\frac{1}{4}$ S 36 BT. No other trees suitable for bearing trees within limits. Enter scattering cedar and juniper timber and brush, bears NW. and SE.

52.51 Intersect E. bdy. of Tract No. 37 of T15N., R4W. 14.92 chs. S. 0°53'E. of cor. No. 6 of said tract, hereinafter described. Leave Tract No. 37.

54.30 Sand wash 15 lks. wide, 2 $\frac{1}{2}$ ft. deep, course NW.

69.50 Wire fence bears N22°E. and S22°W.

70.00 Leave level land, bears NW. and SE.; Enter rolling land, slopes N.

80.00 Intersect the reestablished cor. of T. 15 N., R. 4 W. (NE. cor.) and original cor. of Frac. T. 15 $\frac{1}{2}$ N., R. 4 W. (SE. cor.) hereinbefore described.

Survey of South Bdy. of Frac. Township 15 $\frac{1}{2}$ North, Range 4 West and Independent Resurvey of the North Boundary of Township 15 N., Range 4 W

30

Chains

Land level and rolling.
Soil sandy and stony 2nd. and 3rd. rate.
Timber scattering cedar and juniper.
Undergrowth, oak and juniper brush.

Boundaries of Township 15 North Range 4 West.
Latitudes, Departures, and Closing Errors

Line Designated	True bearing	Dist.	Latitudes		Departures	
			N Chs.	S Chs.	E Chs.	W Chs.
South Boundary of Township.	West	152.57				152.57
	S89°34'W	40.99		.31		40.99
	S89°41'W	40.94		.23		40.94
	N88°57'W	41.00	.75			40.99
	N89°07'W	41.13	.63			40.12
	S89°30'W	120.41		1.05		120.41
	S83°41'W	39.39		4.33		39.15
West Boundary of Township	N0°2'E.	40.26	40.26		.02	
	N0°2'E	40.32	40.32		.02	
	North	40.20	40.20			
	N0°2'E	40.25	40.25		.02	
	N0°2'W.	40.12	40.12			.02
	N0°09'W	40.34	40.34			.11
	N0°05'W	40.37	40.37			.06
	N0°2'W	40.27	40.27			.02
	North	40.31	40.31			
	N0°02'E.	40.21	40.21		.02	
	N0°04'E	40.13	40.13		.05	
North	41.60	41.60				
North Boundary of Township	N89°57'E	475.10	.41		475.10	
East Boundary of Township.	South	480.00		480.00		
Convergency					.49	
Totals			486.17	485.92	475.72	475.38
			485.92		475.38	
			Error in lat. 0.25			
			Error in dep.		0.34	

Survey of Tracts in T 15 N., R 4 W.

Chains

A. number of disposals having been made in this township based on the original township survey, therefore, in the fixation and survey of said tracts,; Retrace the original subdivision lines of the township as follows;

RETRACEMENT for SURVEY

- From the orig. cor. of secs. 23, 24, 25, and 26, hereinafter described.
- North (record bearing), on a random line bet. orig. secs. 23 and 24
- 40.00 (Record dist.) Diligent search in this vicinity fails to reveal any trace of the orig. $\frac{1}{4}$ sec. cor.
- 80.00 (Record dist.) Diligent search in this vicinity fails to reveal any trace of the orig. cor. of secs. 13, 14, 23, and 24., therefore continue the random line and at
- 124.23 Fall 21 lks. W. of the orig. $\frac{1}{4}$ sec. cor. of secs. 13 and 14 hereinafter described.
- True course and dist of line from orig. cor. of secs. 23, 24, 25, and 26, are therefore N 0° 06' E. 124.23 chs. which to maintain the orig. proportion, gives for the cor. intervals along the line 41.41 chs.
- Thence
- North (record bearing) on a random line bet. orig. secs. 13 and 14 (N $\frac{1}{2}$)
- 40.66 Fall 137 lks. E. of the orig. cor. of secs. 11, 12, 13, and 14 hereinafter described.
- True course and dist. of N $\frac{1}{2}$ mile bet. orig. secs. 13 and 14 are, therefore N 1° 56' W. 40.68 chs.
-
- North (record bearing) on a random line bet. orig. secs. 11 and 12 (S $\frac{1}{2}$)
- 41.19 Fall 99 lks. E. of the orig. $\frac{1}{4}$ sec. cor., hereinafter described.
- True course and dist. of S $\frac{1}{2}$ mile bet. orig. secs. 11 and 12 are therefore, N 1° 23' W. 41.20 chs.
- Thence
- North (record bearing) on a random line bet. orig. secs. 11 and 12 (N $\frac{1}{2}$)
- 40.94 Fall 52 lks. W. of the orig. cor. of secs. 1, 2, 11, and 12 hereinafter described.
- True course and dist. of N $\frac{1}{2}$ mile bet. orig. secs. 11 and 12 are therefore N 0° 45' E. 40.94 chs.
-
- North (record bearing) on a random line bet. orig. secs. 1 and 2. (S $\frac{1}{2}$)
- 40.00 Diligent search in this vicinity, fails to reveal any trace of the orig. $\frac{1}{4}$ sec. cor., therefore continue line and measurement and at
- 80.93 Fall 125 lks. E. of the orig. cor. of secs. 1, 2, 1A and 2A hereinafter described.
- True course and dist. of mile bet. secs. 1 and 2, are therefore, N 0° 53' W. 80.94 chs.
-
- East (record bearing) on a random line bet. orig. secs. 1 and 1A. (W $\frac{1}{2}$)
- 40.00 Diligent search in this vicinity fails to reveal any trace of the orig. $\frac{1}{4}$ sec. cor.
-

Survey of Tracts in T 15 N., R 4 W

32

Chains	<u>Retracement for Survey, continued.</u>
40.00	<p>N 4°52'E. (record bearing) on a random line bet. orig. secs. 1A and 2A (S $\frac{1}{2}$) (Record dist.) diligent search in this vicinity fails to reveal any trace of the orig. $\frac{1}{4}$ sec. cor. of said secs.; Continue line and measurement</p>
80.00	<p>(Record dist.); diligent search in this vicinity fails to reveal any trace of the orig. cor. of secs. 1A, 2A, 1B, and 2B.; Continue line and measurement</p>
118.00	<p>(Record dist.): Diligent search in this vicinity fails to reveal any trace of the orig. cor. of secs. 1B, 2B, 35, and 36 on N. bdy. of Tp.</p>

40.19	<p>From the reestablished orig. cor. of secs. 2, 3, 34, and 35 on S. bdy. of Tp. hereinbefore described. North (record bearing) on a random line bet. orig. secs. 34 and 35 (S $\frac{1}{2}$) Fall 104 lks. W. of the orig. $\frac{1}{4}$ sec. cor. hereinafter described. True course and dist. of S $\frac{1}{2}$ mile bet. orig. secs. 34 and 35 are, therefore N 1°29'E. 40.20 chs.</p>
41.33	<p>Thence North (record bearing) on a random line bet. orig. secs. 34 and 35 (N $\frac{1}{2}$) Fall 52 lks. W. of the orig. cor. of secs. 26, 27, 34 and 35 hereinafter described. True course and dist. of N $\frac{1}{2}$ mile bet. orig. secs. 34 and 35, are therefore N 0°43'E. 41.33 chs.</p>

40.00	<p>North (record bearing) on a random line bet. orig. secs. 26 and 27 (S $\frac{1}{2}$) (Record dist.); Diligent search in this vicinity fails to reveal any trace of the orig. $\frac{1}{4}$ sec. cor.; Continue line and measurement and at</p>
84.41	<p>Fall 393 lks. W. of the orig. cor. of secs. 22, 23, 26, and 27, hereinafter described. True course and dist. of mile bet. secs. 26 and 27, are therefore, N 2°40'E. 84.50 chs.</p>

40.86	<p>East (record bearing) on a random line bet. orig. secs. 23 and 26. Fall 34 lks. S. of the orig. $\frac{1}{4}$ sec. cor., hereinafter describe. True course and dist. of W $\frac{1}{2}$ mile bet. orig. secs. 23 and 26, are therefore S 89°31'W. 40.86 chs.</p>
41.28	<p>Thence East (record bearing) on a random line bet. orig. secs. 23 and 26 (E $\frac{1}{2}$) Fall 35 lks. S. of the orig. cor. of secs. 23, 24, 25, and 26, hereinafter described. True course and dist. of E $\frac{1}{2}$ mile bet. orig. secs. 23 and 26, are therefore S 89°24'W. 41.28 chs.</p>

<p>From the restored point for orig. cor. of secs. 13, 14, 23 and 24, hereinafter described. West (record bearing) on a random line bet. orig. secs. 14 and 23</p>	

Survey of Tracts in T 15 N., R 4 West.

Chains	<u>Retracement for Survey, continued.</u>
41.40	Fall 340 lks. N. of the recognized orig. $\frac{1}{4}$ sec. cor. of secs. 14 and 23, hereinafter described. True course and dist. of E. $\frac{1}{2}$ mile bet. orig. secs. 14 and 23 are therefore N85°18'E. 41.54 chs.

40.00	From the orig. cor. of secs. 11, 12, 13, and 14, hereinafter described. West (record bearing) on a random line bet. orig. secs. 11 and 14 (E $\frac{1}{2}$) (Record dist.): Diligent search in this vicinity fails to reveal any trace of the orig. $\frac{1}{4}$ sec. cor.: Continue line and measurement and at
83.74	Fall 302 lks. S. of the orig. cor. of secs. 10, 11, 14, and 15 hereinafter described. True course and dist. of mile bet. orig. secs. 11 and 14 are therefore N87°56'W. 83.79 chs.

40.00	Thence North (record bearing) on a random line bet. orig. secs. 10 and 11 (Record dist.): Diligent search in this vicinity fails to reveal any tract of the orig. $\frac{1}{4}$ sec. cor.: Continue line and measurement and at
82.38	Fall 246 lks. E. of the orig. cor. of secs. 2, 3, 10, and 11 hereinafter described. True course and dist. of mile bet. orig. secs. 10 and 11 are, therefore, N1°43'W. 82.43 chs.

40.78	Thence East (record bearing) on a random line bet. orig. secs. 2 and 11 (W. $\frac{1}{2}$) Fall 32 lks. S. of the orig. $\frac{1}{4}$ sec. cor. hereinafter described. True course and dist. of W $\frac{1}{2}$ mile bet. orig. secs. 2 and 11 are therefore, S. 89°33'W. 40.78 chs.
44.82	Thence East (record bearing) on a random line bet. orig. secs. 2 and 11 (E $\frac{1}{2}$) Fall 351 lks. N. of the orig. cor. of secs. 1, 2, 11, and 12 hereinafter described. True course and dist. of E $\frac{1}{2}$ mile bet. orig. secs. 2 and 11 are, therefore N85°31'W. 44.96 chs.

41.45	Thence North (record bearing) on a random line, bet. orig. secs. 2 and 3 (S $\frac{1}{2}$) Fall 47 lks. E. of the orig. $\frac{1}{4}$ sec. cor., hereinafter described. True course and dist. of S. $\frac{1}{2}$ mile bet. orig. secs. 2 and 3 are, therefore, N 0°39'W. 41.45 chs.
40.97	Thence North (record bearing) on a random line bet. orig. secs. 2 and 3 (N $\frac{1}{2}$) Fall 31 lks. E. of the orig. cor. of secs. 2, 3, 2A, and 3A, hereinafter described. True course and dist. of N $\frac{1}{2}$ mile bet. orig. secs. 2 and 3 are, therefore N 0°26'W. 40.97 chs.

Survey of Tracts in T 15 N., R 4 W.

Chains

Retracement for Survey, continued.

	Thence S 89°54'E. (record bearing), on a random line, bet. orig. secs. 2 and 2A.
40.10	(Record dist.); Diligent search in this vicinity fails to reveal any trace of the orig. $\frac{1}{4}$ sec. cor.; Continue line and measurement and at
85.08	Fall 426 lks. N. of the orig. cor. of secs. 1, 2, 1A, and 2A. hereinafter described. True course and dist. of mile bet. orig. secs. 2 and 2A are, therefore, N. 87°02'W. 85.19 chs.

	Thence N 5°00'E. (record bearing) on a random line bet. orig. secs. 2A and 3A.
40.00	(Record dist.); Diligent search in this vicinity fails to reveal any trace of the orig. $\frac{1}{4}$ sec. cor.; Continue line and measurement
80.00	(Record dist.); Diligent search fails to reveal any trace of the orig. cor. of secs. 2A, 3A, 2B, and 3B., therefore continue random line and at
118.35	(Record dist.); Diligent search in this vicinity fails to reveal any trace of the cor. of secs. 2B, 3B, 34 and 35 on N. bdy. of Tp.

	From the reestablished orig. cor. of secs. 3, 4, 33, and 34 on S. bdy. of Tp. hereinbefore described North (record bearing) on a random line bet. orig. secs. 33 and 34.
40.00	(Record dist.); Diligent search in this vicinity fails to reveal any trace of the orig. $\frac{1}{4}$ sec. cor.; Continue line and measurement and at
83.24	Fall 99 lks. W. of the orig. cor. of secs. 27, 28, 33, and 34 hereinafter described. True course and dist. of mile bet. orig. secs. 33 and 34 are, therefore N 0°41'E. 83.24 chs.

	Thence S 89°54'E. (record bearing), on a random line bet. orig. secs. 27 and 34.
41.15	Fall 180 lks. N. of the orig. $\frac{1}{4}$ sec. cor. hereinafter described. True course and dist. of W $\frac{1}{2}$ mile bet. orig. secs. 27 and 34 are therefore, N 87°24'W. 41.19 chs.
	Thence S 89°54'E. on a random line bet. orig. secs. 27 and 34 (E $\frac{1}{2}$)
41.27	Fall 79 lks. S. of the orig. cor. of secs. 26, 27, 34, and 35 hereinafter described. True course and dist. of E $\frac{1}{2}$ mile bet. orig. secs. 27 and 34, are, therefore, S 89°00'W. 41.27 chs.

	Thence North (record bearing) on a random line bet. orig. secs. 27 and 28

Survey of Tracts in T 15 N., R 4 W.

Chains

Retracement for Survey, continued.

39.05 Fall 26 lks. W. of the orig. 1/4 sec. cor. hereinafter described True course and dist. of S. 1/2 mile bet. orig. secs. 27 and 28, are therefore, N 0°23'E. 39.05 chs.

Thence North, (record bearing) on a random line bet. orig. secs. 27 and 28 N 1/4

43.24 Fall 495 lks. W. of the orig. cor. of secs. 21, 22, 27, and 28 hereinafter described. True course and dist. of N 1/2 mile bet. orig. secs. 27 and 28, are therefore N 6°32'E. 43.52 chs.

Thence S 89°57'E. (record bearing) on a random line bet. orig. secs. 22 and 27

40.92 Fall 39 lks. S. of the orig. 1/4 sec. cor. hereinafter described. True course and dist. of W 1/2 mile bet. orig. secs. 22 and 27, are therefore S 89°27'W. 40.92 chs.

Thence S 89°57'E. (record bearing) on a random line bet. orig. secs. 22 and 27 (E 1/2)

40.16 Fall 74 lks. S. of the orig. cor. of secs. 22, 23, 26, and 27 hereinafter described. True course and dist. of E 1/2 mile bet. orig. secs. 22 and 27, are therefore, S 89°00'W. 40.17 chs.

Thence North (record bearing) on a random line bet. orig. secs. 21 and 22

40.00 (Record dist.) Diligent search in this vicinity fails to reveal any trace of the orig. 1/4 sec. cor.; Continue line and measurement and at

83.31 Fall 75 lks. E. of the orig. cor. of secs. 15, 16, 21, and 22 hereinafter described. True course and dist. of mile bet. orig. secs. 21 and 22 are therefore, N. 0°31'W. 83.31 chs.

Thence North (record bearing) on a random line bet. orig. secs. 15 and 16. (S 1/2)

41.55 Fall 195 lks. E. of the orig. 1/4 sec. cor., hereinafter described. True course and dist. of S 1/2 mile bet. orig. secs. 15 and 16, are therefore, N 2°41'E. 41.60 chs.

Thence North (record bearing) on a random line bet. orig. secs. 15 and 16, (N 1/2)

41.89 Fall 70 lks. W. of the orig. cor. of secs. 9, 10, 15, and 16 hereinafter described. True course and dist. of N 1/2 mile bet. orig. secs. 15 and 16, are therefore, N 0°58'E. 41.90 chs.

Thence N 89°49'E. (record bearing) on a random line bet. orig. secs. 10 and 15.

38.95 Fall 87 lks. S. of the orig. 1/4 sec. cor. hereinafter described. True course and dist. of W. 1/2 mile bet. orig. secs. 10

Survey of Tracts in T 15 N., R 4 W.

Retracement for Survey, continued.

Chains

- and 15, are therefore, S 88°32'W. 38.96 chs.
- Thence
N 89°49'E. (record bearing) on a random line bet. orig. secs
10 and 15 (E. $\frac{1}{2}$)
- 41.27 Fall 226 lks. S. of the orig. cor. of secs. 10, 11, 14 and 15
hereinafter described.
True course and dist. of E. $\frac{1}{2}$ mile bet. orig. secs. 10 and
15, are therefore, S 86°41'W. 41.35 chs.
-
- Thence
North (record bearing) on a random line bet. orig. secs
9 and 10.
- 40.84 Fall 156 lks. E. of the orig. $\frac{1}{4}$ sec. cor. hereinafter
described.
True course and dist. of S. $\frac{1}{2}$ mile bet. orig. secs .9
and 10, are therefore, N 2°11'W. 40.87 chs.
- Thence
North (record bearing) on a random line bet. orig. secs.
9 and 10 (N $\frac{1}{2}$).
- 40.92 Fall 117 lks. E. of the orig. cor. of secs. 3, 4, 9, and 10,
hereinafter described.
True course and dist. of N $\frac{1}{2}$ mile bet. orig. secs .9 and
10, are therefore, N 1°39'W. 40.94 chs.
-
- Thence
N 89°55'E. (record bearing) on a random line bet. orig.
secs. 3 and 10 (W $\frac{1}{2}$)
- 39.95 (Record dist.); Diligent search in this vicinity fails to
reveal any trace of the orig. $\frac{1}{4}$ sec. cor.;
Continue line and measurement, and at
- 80.68 Fall 3.95 chs. S. of the orig. cor. of secs. 2, 3, 10, and 11,
hereinafter described.
True course and dist. of mile bet. orig. secs. 3 and 10;
are therefore, S 87°07'W. 80.79 chs.
-
- Thence
North (record bearing) on a random line bet. orig. secs.
3 and 4 (S. $\frac{1}{2}$)
- 41.06 Fall 129 lks. E. of the orig. $\frac{1}{4}$ sec. cor. hereinafter
described.
True course and dist. of S $\frac{1}{2}$ mile bet. orig. secs. 3 and 4
are therefore N-1°48'W., 41.08 chs.
- Thence
North (record bearing) on a random line bet. orig. secs.
3 and 4 (N $\frac{1}{2}$)
- 40.00 (Record dist.); Diligent search in this vicinity fails to
reveal any trace of the orig. cor. of secs:
3, 4, 3A, and 4A
Set temp. cor. of said secs.
-
- Thence
N 4°46'E (record bearing) on a random line, making
diligent search at record intervals for the
orig. $\frac{1}{4}$ sec. and sec. cors.; No trace of any old
cor. being found.; At
- 118.90 (Record dist.); Diligent search in this vicinity fails to
reveal any trace of the orig. cor. of secs.
3B, AB33, and 34 on N. bdy. of Tp.; Set temp. cor.

Survey of Tracts in T15N., R 4 W.

Chains	<u>Retracement for Survey, continued.</u>
	From the orig. cor. of secs. 2, 3, 2A, and 3A hereinafter described
	N 89°51'W. (record bearing) on a random line bet. secs. 3 and 3A. (E $\frac{1}{2}$)
40.00	Diligent search in this vicinity fails to reveal any trace of the orig. $\frac{1}{4}$ sec. cor.; Continue line and measurement.
80.00	(Record dist.); Diligent search in this vicinity fails to reveal any trace of the orig. cor. of secs. 3, 4, 3A, and 4A.; Set temp. cor. of said secs.
	Thence
	S 89°53'W. (record bearing) on a random line
1.20	Intersect N. and S. line 5.59 chs. N. of the temp. cor. of secs. 3, 4, 3A, and 4A. on meridional sec. line
39.90	(Record dist.); Set temp. $\frac{1}{4}$ sec. cor. of secs. 4 and 4A.; From which the orig. $\frac{1}{4}$ sec. cor. of said secs. hereinafter described, bears S 21°19'W. 3.52 chs. dist.
	Thence
	S 89°53'W. (record bearing) on a random line bet. orig. secs. 4 and 4A. (W $\frac{1}{2}$)
40.03	Fall 240 lks. S. of the orig. cor. of secs. 4, 5, 4A, and 5A. hereinafter described.
	True course and dist. of W $\frac{1}{2}$ mile bet. orig. secs. 4 and 4A, are therefore N 86°41'W. 40.10 chs.

	From the orig. cor. of secs. 4, 5, 4A, and 5A
	South (record bearing) on a random line bet. orig. secs. 4 and 5.
40.00	(Record dist.); Diligent search in this vicinity fails to reveal any trace of the orig. $\frac{1}{4}$ sec. cor.; Continue line and measurement.
80.00	(Record dist.) Diligent search in this vicinity fails to reveal any trace of the orig. cor. of secs. 4, 5, 8, and 9.

	From the orig. cor. of secs. 3, 4, 9, and 10 hereinafter described
	West (record bearing) on a random line bet. orig. secs. 4 and 9 (E $\frac{1}{2}$)
40.00	(Record dist.) Diligent search in this vicinity fails to reveal any trace of the orig. $\frac{1}{4}$ sec. cor.
	Continue line and measurement.
80.00	(Record dist.) Diligent search in this vicinity fails to reveal any trace of the orig. cor. of secs. 4, 5, 8, and 9.

	From the orig. cor. of secs. 4, 5, 4A, and 5A, hereinafter described.
	N 4°44'E. (record bearing), on a random line bet. orig. secs. 4A and 5A.
40.00	(Record dist.) Diligent search in this vicinity fails to reveal any trace of the orig. $\frac{1}{4}$ sec. cor.; Continue line and measurement.
80.00	(Record dist.) Diligent search in this vicinity fails to reveal any trace of the orig. cor. of secs. 4A, 5A, 4B, and 5B.
119.00	(Record dist.) Diligent search in this vicinity fails to reveal any trace of the orig. cor. of secs. 4B, 5B, 32, and 33, on N. bdy. of Tp.

Chains

Retracement for Survey, continued.

- From the orig. cor. of secs. 19, 20, 29, and 30, hereinafter described,
West (record bearing) on a random line bet. orig. secs. 19 and 30 ($E \frac{1}{2}$)
- 40.00 Fall 02 lks. N. of the orig. $\frac{1}{4}$ sec. cor. hereinafter described
True course and dist. of $E \frac{1}{2}$ mile bet. orig. secs. 19 and 30 are therefore $N 89^{\circ}58'E. 40.00$ chs.
- Thence
West (record bearing) on a random line bet. orig. secs. 19 and 30 ($W \frac{1}{2}$)
- 38.88 Fall 248 lks. S. of the witness cor. to cor. of secs. 19, 24, 25, and 30 on W. bdy. of Tp. hereinbefore described.
True course and dist. of $W \frac{1}{2}$ mile bet. orig. secs. 19 and 30 are therefore $N 89^{\circ}58'E. 38.88$ chs.
-
- Thence
 $N 0^{\circ}03'W.$ (record bearing) on a random line bet. orig. secs. 19 and 20 ($S \frac{1}{2}$)
- 40.10 Fall 7 lks. E. of the orig. $\frac{1}{4}$ sec. cor. hereinafter described
True course and dist. of $S \frac{1}{2}$ mile bet. orig. secs. 19 and 20, are therefore $N 0^{\circ}09'W. 40.10$ chs.
- Thence
 $N 0^{\circ}03'W.$ (record bearing) on a random line bet. orig. secs. 19 and 20 ($N \frac{1}{2}$)
- 40.52 Fall 02 lks. E. of the orig. cor. of secs. 17, 18, 19, and 20 hereinafter described.
True course and dist. of $N \frac{1}{2}$ mile bet. orig. secs. 19 and 20 are therefore, $N 0^{\circ}05'W. 40.52$ chs.
-
- Thence
 $N 89^{\circ}57'W.$ (record bearing) on a random line bet. orig. secs. 18 and 19 ($E \frac{1}{2}$)
- 40.48 Fall 16 lks. N. of the orig. $\frac{1}{4}$ sec. cor. hereinafter described.
True course and dist. of $E \frac{1}{2}$ mile bet. orig. secs. 18 and 19, are therefore $N 89^{\circ}49'E. 40.48$ chs.
- Thence
 $N 89^{\circ}57'W.$ (record bearing) on a random line bet. orig. secs. 18 and 19 ($W \frac{1}{2}$)
- 38.34 Fall 17 lks. N. of the orig. cor. of secs. 13, 18, 19, and 24 on W. bdy. of Tp. hereinbefore described.
True course and dist. of $W \frac{1}{2}$ mile bet. orig. secs. 18 and 19 are therefore $N 89^{\circ}49'E. 38.34$ chs.
-

Chains

Tract No.37

Comprising the NW. 1/4 of sec.1, the W 1/2 of sec.1A, the S. 1/2 of the W. 1/2, and lots 1 and 2 of sec.1B of orig. T15N., R4W., patented January 21, 1916, to the Atchison, Topeka and Santa Fe Ry. Co., successors in interest to the Atlantic and Pacific RR.

The location of this tract is controlled by the record of survey and the identified orig. corner of secs. 1, 2, 11, and 12 and 1, 2, 1A, and 2A., T15N., R4W.

At a point 40.00 chs. due east of point for cor. of secs. 1B, 2B, 35, and 36 on N. bdy. of Tp. set at record bearing and dist. from the identified orig. cor. of secs. 1, 2, 1A, and 2A.

Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for NE. cor., Cor No. 1 of tract, marked on brass cap

T15 1/2 N R4W
AP 1
TR 37 S25

1924

Thence

40.00 West along N. bdy. of Tract No. 37
Intersect temp. point for cor. of orig. secs. 1B, 2B, 35, and 36
Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for cor. No. 2 of tract, marked on brass cap

T15 1/2 N R4W
S25 AP 2
TR 37

1924

Thence

118.00 (Record dist.) S 4° 52' W. (record bearing) along W. bdy. of Tract No. 37
Intersect the orig. cor. of secs. 1, 2, 1A, and 2A which is a mesquite post 3 ins. sq. 14 ins. above ground, firmly set, and properly marked.; No cor. accessories.

Alongside the old post, Set an iron post 3 ft. long, 1 in in diam. 27 ins. in the ground for Cor. No. 3 of Tract No. 37, marked on brass cap

T15 1/2 N R4W S36
AP 3
TR 37

1924

Thence

40.47 S 0° 53' E. along W. bdy. of Tract No. 37
Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for cor. No. 4 of Tract No. 37, marked on brass cap

T15 N R4W S1
AP 4
TR 37

1924

Chains

40.00 Thence East along the S. bdy. of Tract No. 37 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for cor. No. 5 of Tract No. 37, marked on brass cap

TR. 37 / AP 5 S 1 T15N. R4W

1924

40.47 Thence N 0°53' W. along E. bdy. of Tract No. 37. Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for cor. No. 6 of Tract No. 37., marked on brass cap

AP 6 / TR 37 T15N R 4 W S 1

1924

118.00 Thence N 4°52' E. along E. bdy. of Tract No. 37 To NE. cor. (Cor. No. 1) place of beginning.

Tract No. 38

Comprising all of orig. sec. 3, the E 1/2, the NW 1/4, and the E 1/2 of the SW 1/4 of sec. 3A., and all of sec. 3B. of the orig. survey of T15N., R4W., patented January 21, 1916 to the Atchison, Topeka, and Santa Fe, Ry. successors in interest to the Atlantic and Pacific RR.

The location of this tract is controlled by the record of the orig. survey of T15N., R4W. and the following identified orig. corners.; The cor. of secs. 2, 3, 2A and 3A, the 1/4 sec. cor. bet. secs. 2 and 3., the cor. of secs. 2, 3, 10, and 11, the cor. of secs. 3, 4, 9, and 10, the 1/4 sec. cor. of secs. 3 and 4., and the 1/4 sec. cor. of secs. 4 and 9.

At point for orig. cor. of secs. 2B, 3B, 34, and 35 (record bearing and dist.) from the identified orig. cor. of secs. 2, 3, 2A, and 3A.; Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for NE. cor., Cor. No. 1 of tract, marked on brass cap

T15 1/2 N R4W / AP 1 TR 38 S 26


1924

81.42 Thence S 86°37' W. along N. bdy. of Tract No. 38 Point for orig. cor. of secs. 3B, 4B, 33, and 34 (record bearing and

Survey of Tracts in T 15 N., R 4 W.


Chains

dist. from the reestablished point for orig. cor. of secs. 3, 4, 3A, and 4A, T15N., R4W.)
Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for cor. No. 2 of Tract No. 38, marked on brass cap




58.90 Thence S 4°46'W (record bearing), along W. bdy. of Tract No. 38 To cor. No. 1 of Tract No. 39 of T15½N., R4W., described in Book D
Thence, bet. tracts No. 38 of T15N., R4W. and No. 39 of T15½N., R4W.


78.90 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for Cor. No. 3 of Tract No. 38, T15N., R4W., and cor. No. 8 of Tract No. 39, T15½N., R4W., marked on brass cap



20.26 Thence N 86°11'E. bet. tracts No. 38 of T15N., R4W., and No. 39 of T15½N., R4W.
(Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for cor. No. 4 of Tract No. 38 of T15N., R4W., and cor. No. 7 of Tract No. 39, of T15½N., R4W., marked on brass cap



40.00 Thence S 4°46'W. bet. tracts No. 38 of T15N., R4W., and No. 39 of T15½N., R4W.
Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for cor. No. 5 of Tract No. 38 of T15N., R4W., and cor. No. 6 of Tract No. 39 of T15½N., R4W., marked on brass cap




20.26 Thence S 86°11'W. (Computed bearing) bet. tracts No. 38 of T15N., R4W., and No. 39 of T15½N., R4W.
The point for cor. No. 6 of Tract No. 38 of T15N., R4W., and Cor. No. 5 of Tract No. 39 of T15½N., R4W., and reestablished point for orig. cor. of secs. 3, 4, 3A, and 4A. T15N., R4W. falls on bed of creek where prevailing conditions would insure the

Chains

19.78

the destruction of the cor., therefore at
 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for witness cor. to cor. No. 6 of Tract No. 38 of T15N., R4W., and cor. No. 5 of Tract No. 39 of T15 $\frac{1}{2}$ N. R4W., marked on brass cap



1924


Thence.

From true point for the above cor. of said tracts S 0°30'W. (computed bearing) along the W. bdy. of Tract No. 38.

40.00.

(Record dist.). Intersect the orig. $\frac{1}{4}$ sec. cor. of secs. 3 and 4, which is a juniper post 3 ins. sq. projecting 12 ins. above ground, marked $\frac{1}{4}$ S.; Alongside the old post,

Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for cor. No. 7 of Tract No. 38., marked on brass cap



1924


Thence

S. 1°48' E. along W. bdy. of Tract No. 38

41.08

Intersect the identified orig. cor. of secs. 3, 4, 9, and 10, which is a granite stone 16x12x10 ins. set in small mound of stone, marked with 3 notches on E. and 5 notches on S. edges.; No cor. accessories.

Alongside the old stone cor.; Set an iron post 3 ft. long, 1 in. in diam. over cross (x) on bedrock, supported in a mound of stone for cor. No. 8 of Tract No. 38 marked on brass cap



1924

Thence


N 87°07' E. along S. bdy. of Tract No. 38

80.79

Intersect the identified orig. cor. of secs. 2, 3, 10, and 11 which is a juniper post 3 ins. sq. projecting 8 ins. above ground, greatly decayed, marked T15N., R4W S 2 on NE. face, with 2 notches on E. and 5 notches on S. edges.; No cor. accessories visible.


Along side of the old post, Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for cor. No. 9 of Tract No. 38 and cor. No. 2 of Tract No. 39, marked on brass cap

Chains




1924

41.45 Thence N 0°39'W along E. bdy. of Tract No. 38. Intersect the identified orig. $\frac{1}{4}$ sec. cor. of secs. 2 and 3, T15N., R4W., which is a granite stone 8X10X6 ins. above ground, firmly set, marked $\frac{1}{4}$ S on W. face witnessed by a mound of stone W. Alongside the old stone, Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for cor. No. 10 of Tract No. 38, marked on brass cap



1924

40.97 Thence N 0°26'W along E. bdy. of Tract No. 38. Intersect the the identified orig. cor. of secs. 2, 3, 2A, and 3A, which is a granite stone 12X8X10 ins. above ground, firmly set, marked with 2 notches on E. and 6 notches on S. edges. No cor. accessories. Alongside the old stone, Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for cor. No. 11 of Tract No. 38., marked on brass cap



1924

118.35 Thence N 5°00'E. (record bearing) along E. bdy. of Tract No. 38. (Record dist.) To NE. cor., Cor. No. 1 the place of beginning.

Tract No. 39

Comprising all of orig. sec. 11, T15N., R4W., patented January 21, 1916 to the the Atchison, Topeka, and Santa Fe Ry. Co. successors in interest to the Atlantic and Pacific RR. Co.

The location of this tract is controlled by 6 identified corners of the original survey of T15N., R4W.

The identified orig. cor. of secs. 1, 2, 11, and 12, T15N., R4W. is a lime stone 18X12X8 ins. set in a mound of stone, marked with 1 notch on E. and 5 notches on S. edges. No cor. accessories.

Alongside the old stone, Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for NE. cor. and cor. No. 1 of Tract No. 39, marked on brass cap

Chains

T15N	R4W
AP 1	S1
TR 39	

1924

44.96

Thence
N 85°31'W. along N. bdy of Tract No. 39
Intersect the identified orig. cor. of secs. 2 and 11,
T15N., R4W., which is a granite stone 8X6X5 ins.
above ground, firmly set, marked 1 S on N. face and
witnessed by a mound of stone N.
Alongside of the old stone, Set an iron post 3 ft. long, 1 in.
1 in. in diam. 27 ins. in the ground for cor. No.
2 of Tract No. 39., marked on brass cap

T15 N	R4W
S 2	

AP 2
TR 39

1924

40.78

Thence
S 89°33'W. along N. bdy. of Tract No. 39
Intersect cor. No. 9 of Tract No. 38, identical with cor. No.
3 of Tract No. 39, hereinbefore described, which is
an iron post 1 in. in diam. 92 ins. above ground
marked on brass cap

T15N	R4W
TR 38	S2
AP 9	

AP 3
TR 39

1924

82.43

Thence
S 1°43'E. along W. bdy. of Tract No. 39.
Intersect the identified orig. cor. of secs. 10, 11, 14, and 15,
which is a granite stone 8X6X7 ins. above ground
loosely set., marked with 2 notches on E. and 4
notches on S. edges.; No cor. accessories.
Alongside the old stone.; Set an iron post 3 ft. long, 1 in.
in diam. 27 ins. in the ground for cor. No. 4 of Tract
No. 39, marked on brass cap

T15N	R4W
TR 39	AP 4
S11	

1924

83.79

Thence
S 87°56'E. along S. bdy. of Tract No. 39.
Intersect the identified orig. cor. of secs. 11, 12, 13, and 14
which is a juniper post 3 ins. sq. projecting 8
ins. above ground, properly marked and witnessed
by remains of earth mound N.
Alongside the old post.; Set an iron post 3 ft. long, 1 in.
in diam. 27 ins. in the ground for cor. No. 5 of
Tract No. 39, marked on brass cap

TR 39	T15N
AP 5	R4W
	S12

1924

Thence

Survey of Tracts in T 15 N., R 4 W

Chains

41.20 N 1°23'W. along E.bdy.of Tract No.39
 Intersect the identified orig. $\frac{1}{4}$ sec. cor.of secs.11.and
 12, which is a limestone 10x8x6 ins. above ground,
 loosely set, marked $\frac{1}{4}$ S on W.face.; Stone mound
 around cor.
 Alongside the old stone.; Set an iron post 3 ft. long, 1 in
 in diam.27 ins. in the ground for cor.No.6 of
 Tract No.39, marked on brass cap

AP 6	T15N
TR 39	R 4 W
	S 12

1924

40.94 Thence
 N 0°45'E along E bdy.of Tract No.39
 To NE.cor., Cor.No.1 the place of beginning.

Tract No.40

Comprising the following described land ,entered under
 H.E. 038001 and patented February 1,1922 by
 Thaddeus Mullen.; The SE. $\frac{1}{4}$ of the NE. $\frac{1}{4}$ of the
 NE. $\frac{1}{4}$, the NE. $\frac{1}{4}$ of the SE. $\frac{1}{4}$ of the NE. $\frac{1}{4}$, the W $\frac{1}{2}$
 of the SE. $\frac{1}{4}$ of the NE. $\frac{1}{4}$ and the E. $\frac{1}{2}$ of the SW. $\frac{1}{4}$
 of the NE. $\frac{1}{4}$. ;The W. $\frac{1}{2}$ of the NE. $\frac{1}{4}$ of the SE. $\frac{1}{4}$,
 and the W. $\frac{1}{2}$ of the SE. $\frac{1}{4}$ of sec.14 T15N.,R4W.

The location of this tract is controlled by three identifi-
ed corners of the original survey.

At a point 10.17 chs.S 1°56'E.of identified orig.cor.of
 secs.11,12,13, and 14 and cor.No.5 of Tract No.39,
 hereinbefore described,
 Set an iron post 3 ft. long, 1 in. in diam.27 ins. in the
 ground for NE.cor., Cor. No.1 of Tract No.40, marked
 on brass cap

T15N	R4 W
AP 1	S 12
TR 40	

1924

10.00 Thence
 West along N.bdy.of tract No.40
 Set an iron post 3 ft. long, 1 in. in diam.27 ins. in the
 ground for cor.No.2 of Tract No.40, marked on
 brass cap

T15N	R4W
S 12	AP 2
	TR 40

1924


Thence

Survey of Tract in T 15 N., R 4 W.

Chains


30.00

South along W. bdy. of Tract No. 40
Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the
ground for cor. No. 3 of Tract No. 40, marked on
brass cap




20.00

Thence
West along N. bdy. of Tract No. 40
Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the
ground for cor. No. 4 of Tract No. 40, marked on
brass cap




20.00

Thence
South along W. bdy. of Tract No. 40
Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the
ground for cor. No. 5 of Tract No. 40, marked on
brass cap



10.00

Thence
West along N. bdy. of Tract No. 40
Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in
the ground for cor. No. 6 of Tract No. 40, marked
on brass cap



45.29

Thence
S 0°33'W. along W. bdy. of Tract No. 40
Intersect the recognized reestablished $\frac{1}{4}$ sec. cor. of secs.
14 and 23, which is a juniper post 3 ins. in
diam. projecting 12 ins. above ground, firmly
set alongside cor. post of wire fences, marked
 $\frac{1}{4}$ S. on N. face.
Alongside of old post, ; Set an iron post 3 ft. long, 1 in. in
diam. 27 ins. in the ground for cor. No. 7 of
Tract No. 40 and cor. No. 2 of Tract No. 44, marked
on brass cap

Survey of Tracts in T 15 N., R 4 W.

Chains

T15N	TR 40
R4W	AP 7
S 14	AP 2
	TR 44

1924

Thence N 85°18'E along S.bdy.of Tract No.40 and N.bdy.of Tract No.44

20.77 Set an iron post 3 ft. long, 1 in. in diam.27 ins. in the ground for cor.No.8 of Tract No.40, marked on brass cap

TR40	T15N R4W
AP 8	S 14

1924

Thence N 1°03'E along E.bdy.of Tract No.40

23.28 Set an iron post 3 ft. long, 1 in. in diam.27 ins. in the ground for cor.No.9 of Tract No.40, marked on brass cap

TR 40	
AP 9	T15N R4W
	S 14

1924

Thence East along S.bdy.of Tract No.40

10.00 Set an iron post 3 ft. long, 1 in. in diam.27 ins. in the ground for cor.No.10 of Tract No.40, marked on brass cap

TR 40	T15N
AP 10	R4W
	S 13

1924

Thence North along E.bdy.of Tract No.40

30.00 Set an iron post 3 ft. long, 1 in. in diam.27 ins. in the ground for cor.No.11 of Tract No.40, marked on brass cap

TR 40	
AP 11	T15N
	R4W
	S13

1924

Chas

10.00

Thence
East along S.bdy.of Tract No.40
Set an iron post 3 ft. long, 1 in. in diam.27 ins. in the
ground for cor.No.12 of Tract No.40, marked on
brass cap

TR 40	T15N
AP 12	R4W
S 13	

1924

20.34

Thence
N 1°56'W. along E.bdy.of Tract No.40
To NE.cor. Cor.No.1 the place of beginning.

Tract No.41

Comprising the NW. $\frac{1}{4}$ of orig.sec.15, T15N., R4W., patented
January 1, 1916 to the Atchison, Topeka, and Santa
Fe Ry.Co., successors in interest to the Atlantic
and Pacific RR.Co.

The location of this tract is controlled by three
identified corners of the original survey.

The identified orig. $\frac{1}{4}$ sec. cor. of secs.10 and 15 is a
granite stone 12x9x8 ins. above ground, loosely
set in a mound of stone, marked $\frac{1}{4}$ S on N.face
Alongside the old cor.stone; Set an iron post 3 ft. long,
1 in. in diam.27 ins. in the ground for NE.cor.,
Cor.No.1 of Tract No.41, marked on brass cap

T15N	R4W
AP 1	S 10
TR 41	

1924

38.96

Thence
S 88°32'W.along N.bdy.of Tract No.41
Intersect the identified orig. cor. of secs.9,10,15, and 16
which is a granite stone 14x10x10 ins, above ground
firmly set, marked with 3 notches on E. and 4
notches on S.edges with mound of stone around cor.
Alongside the old stone, ;Set an iron post 3 ft. long, 1 in
in diam.18 ins. in the ground to bedrock, supported
in a mound of stone for cor.No.2 of Tract No.41,
marked on brass cap

T15N	R4W
S10	AP 2
	TR 41

1924

Survey of Tracts in T.15 N., R.4 W.

Chains

41.90 Thence
 S 0°58'W. along W. bdy. of Tract No. 41
 Intersect the identified orig. $\frac{1}{4}$ sec. cor. of secs. 9 and
 10 T15N., R4W., which is a lime stone 8X10X8 ins.
 above ground, loosely set, marked $\frac{1}{4}$ S on W. face
 with small mound of stone around cor.
 Alongside the old cor. stone, Set an iron post 3 ft. long,
 1 in. in diam. 27 ins. in the ground for cor. No.
 3 of Tract No. 41, marked on brass cap

T15N	TR 41
R4W	AP 3
S10	

1924

38.96 Thence
 N 88°32'E. along S. bdy. of Tract No. 41
 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the
 ground for cor. No. 4 of Tract No. 41, marked on
 brass cap

TR 41	
AP 4	S10
T15N. R4W	

1924

41.90 Thence
 N 0°58'E. along E. bdy. of Tract No. 41.
 To NE. cor., cor. No. 1 the place of beginning.

Tract No. 42

Comprising the SW $\frac{1}{4}$ of the NE. $\frac{1}{4}$, the NW. $\frac{1}{4}$ of the SE. $\frac{1}{4}$,
 the NE. $\frac{1}{4}$ of the SW. $\frac{1}{4}$ and the SE. $\frac{1}{4}$ of the NW. $\frac{1}{4}$ of
 orig. sec. 19 T15N., R4W., entered under H.D. 1805 P
 and patented May 9, 1907 by Clinton H Draper.

The location of this tract is controlled by all identified
 corners of the orig. survey of sec. 19

At point for NE. $\frac{1}{16}$ sec. cor. of orig. sec. 19, T15N., R4W.
 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the
 ground for cor. No. 1 of Tract No. 42., marked on
 brass cap

T15N	R4W
AP 1	S19
TR 42	

1924

40.08 Thence
 S 89°52'W. along N. bdy. of Tract No. 42
 Point for NW $\frac{1}{16}$ sec. cor. of orig. sec. 19
 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the
 ground for cor. No. 2 of Tract No. 42., marked on
 brass cap

Chains.

T15N	R4W
S 19	AP 2
	TR 42

1924

40.26 Thence
 S 0°21'E. along W. bdy. of Tract No. 42.
 Point for SW. 1/16 sec. cor. of orig. sec. 19.
 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the
 ground for cor. No. 3 of Tract No. 42, marked on
 brass cap

TR 42

AP 3

S 19

T15N R4W

1924

40.05 Thence
 N 89°58'E. along S. bdy. of Tract No. 42.
 To point for SE. 1/16 sec. cor. of orig. sec. 19.
 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the
 ground for cor. No. 4 of Tract No. 42, marked on
 brass cap

TR 42

AP 4

S 19

T15N R4W

1924

40.28 Thence
 N 0°17'W. along E. bdy. of Tract No. 42.
 To NE. cor., Cor No. 1 the place of beginning.

Tract No. 43

Comprising the following described lands, located with
 Military Bounty Land Warrant No. 114701 and
 patented August 8, 1890 to John L Cambridge.
 The NE. 1/4 of the NE. 1/4 of sec. 27, the S 1/2 of the SE. 1/4 and
 the NW. 1/4 of the SE. 1/4 of orig. sec. 22, T15N., R4W.
 The location of this tract is controlled by seven
 identified corners of the original survey of
 T15N., R4W.

Chains

At a point 40.00 chs. North and 20.00 chs. West of the identified orig. cor. of secs. 22, 23, 26, and 27.; Set an iron post 3 ft. long, 1 in. in diam. 4 ins. in the ground to bedrock, supported in a mound of stone for NE. cor., Cor No. 1 of Tract No. 43, marked on brass cap

T15N R4W
AP 1 S 22
TR 43

1924

Thence

20.00 West along N. bdy. of Tract No. 43 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for cor. No. 2 of Tract No. 43, marked on brass cap

T15N R4W
S 22 AP 2
TR 43

1924

Thence

40.70 S 0°14' W. along W. bdy. of Tract No. 43 Intersect the identified orig. 1/4 sec. cor. of secs. 22 and 27, which is an oak post 3 ins. sq., 12 ins. above ground, greatly decayed, marked 1/4 S. on N. face, witnessed by two bearing trees, one each NW. and SW. of cor.

Alongside the old decayed post,; Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for cor. No. 3 of Tract No. 43., marked on brass cap

TR 43
S 22 AP 3

T15N R4W

1924

Thence

20.08 N 89°00' E. along S. bdy. of Tract No. 43. Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for cor. No. 4 of Tract No. 43, marked on brass cap

TR 43

AP 4

T15N

R4W
S. 22

1924

Thence

S 3°02' W. along W. bdy. of Tract No. 43

Chains

21.10 Point for NE 1/16 sec. cor. of sec. 27.; Set an iron post
3 ft. long, 1 in. in diam. 27 ins. in the ground
for cor. No. 5 of Tract No. 43, marked on brass cap

S 27	TR 43
	AP 5
T15N	R4W

1924

Thence
N 89°00'E. along S. bdy. of Tract No. 43
20.21 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the
ground for cor. No. 6 of Tract No. 43, marked on
brass cap

TR 43	S 26
AP 6	
T15N	R4W

1924

Thence
N 2°40'E. along E. bdy. of Tract No. 43
21.13 Intersect the identified orig. cor. of secs. 22, 23, 26, and
27, which is a post 4 ins. sq., 24 ins. above
ground, greatly decayed, with marks almost
obliterated. with two bearing trees, one in each
sec. NW. and SW. of post.
Alongside the old post,; Set an iron post 3 ft. long, 1 in
in diam. 27 ins. in the ground for cor. No. 7 of
Tract No. 43, marked on brass cap

TR 43	T15N
AP 7	R4W
	S 23.

1924

Thence
North along E. bdy. of Tract No. 43
20.00 Set an iron post 3 ft. long, 1 in. in diam. over cross (x)
on bedrock, supported in a mound of stone for
cor. No. 8 of Tract No. 43., marked on brass cap

T15N	R4W
AP 8	S 23
TR 43	

1924

Thence
West along N. bdy. of Tract No. 43
20.00 Set an iron post 3 ft. long 1 in. in diam. 6 ins. in the
ground to bedrock, supported in a mound of
stone for cor. No. 9 of Tract No. 43, marked on
brass cap

Survey of Tracts in T 15 N., R 4 W.

Chains

	T15N
TR 43	R4W
AP 9	S 22

1924

Thence
 20.00 North along E.bdy. of Tract No.43.
 To NE.cor., Cor.No.1 the place of beginning.

Tract No.44

Comprising the E. $\frac{1}{2}$ of orig.sec.23, T15N., R4W., patented January 21, 1916 to the Atchison, Topeka, and Santa Fe Ry.Co., successors in interest to the Atlantic and Pacific RR.Co.

The location of this tract is controlled by three identified cors. of the original survey.

At a point N0°06'E. 82.82 chs.dist. (proportional dist. and computed bearing) from the identified orig.cor. of secs.23, 24, 25, and 26,
 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for NE.cor.; Cor.No.1 of Tract No.44 marked on brass cap


	T15N	R4W
	AP 1	S 13
	TR 44	

1924

Thence
 20.77 S 85°18'W. along N.bdy. of Tract No.44
 Intersect cor.No.8 of Tract No.40, hereinbefore described.
 thence bet. tracts Nos.40 and 44
 41.54 Intersect cor.No.7 of Tract No.40, which is identical
 with cor.No.2 of Tract No.44, hereinbefore
 described.

Thence
 53.99 S 0°01'W. along W.bdy. of Tract No.44
 79.85 Intersect cor.No.11 of H.E.S.No.344
 Intersect the identified orig. $\frac{1}{4}$ sec. cor. of secs.23
 and 26, which is a juniper post 3 ins. sq., 18
 ins. above ground, set in a mound of stone.;
 marked $\frac{1}{4}$ S. on W. face and witnessed by one
 bearing tree SE.
 Alongside of the old post, ;
 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in
 the ground for cor.No.3 of Tract No.44, which
 is identical with cor.No.1 of H.E.S.No.344
 , marked on brass cap

Chains

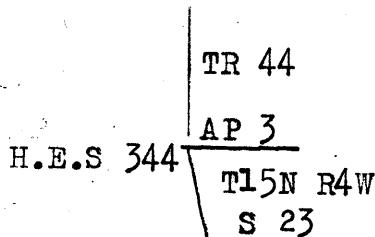


1924

Thence

14.14
41.28

N 89°24'E. along S. bdy. of Tract No. 44.
 Intersect cor. No. 12 of H.E.S. No. 345
 Intersect the identified orig. cor. of secs. 23, 24, 25, and 26, identical with cor. No. 1 of H.E.S. No. 345, which is a juniper post 3 ins. sq. 24 ins. above ground set alongside cor. post of wire fence, properly marked, with 1 notch on E. and 2 notches on S. edges.; No cor. accessories visible.

Alongside the old post,
 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for cor. No. 4 of Tract No. 44 and cor. No. 1 of H.E.S. No. 345, marked on brass cap



1924

Thence

82.82

N 0°06'E., along E. bdy. of Tract No. 44
 To NE. cor., Cor. No. 1 the place of beginning.

Independent Resurvey of Part and Survey of Part (Completion) of Subdivision lines of T.15 N., R.4 W.

Chains

Preliminary to the execution of the resurvey and survey of subdivision lines in this township,; Survey a Sectional Correction Line from the cor. of secs. 25, 26, 35, and 36, established in the normal manner, west 395.92 chs. to an intersection with the west boundary of the Tp., setting temp. 1/4 sec. and sec. cors. alternately thereon, at intervals of 40.00 chs. counting from the east.

The permanent corners on the Sectional Correction line, being afterwards established at the several points of intersection of the Meridional section lines, alined in the normal manner, and the permanent 1/4 sec. cors. on said line being established at the usual mid-point positions, except in the west range of sections, where same is placed at 40.00 chs. from the east.

The 1/4 sec. cors. on the meridional lines in the south tier of sections, are established at 40.00 chs. S. from from corners on the Sectional Correction Line.

The remaining subdivision lines in the township are run from the Sectional Correction Line in the normal manner.


SURVEY

From the cor. of secs. 35 and 36 on S. bdy. of Tp. hereinbefore described.


N 0° 01' W. bet secs. 35 and 36

Descend 39 ft. over N. slope, through dense oak brush undergrowth.

- 6.70 Foot of descent.; Ascend 40 ft. over S. slope.
- 11.70 Top of ascent.; Descend 63 ft. over NE. slope.
- 16.70 Foot of descent in S. edge of valley, bears N70° W. and S70° E. thence over level land.
- 19.50 Leave valley bears N70° W. and S70° E.; Ascend 194 ft. over SW. slope of ridge.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. with marked stone at base, 27 ins. in the ground for 1/4 sec. cor. marked on brass cap



- 51.70 Telephone line from Tonto Springs Ranger Station to Prescott Arizona, bears E. and W.
- 52.00 Top of ridge bears E. and W.; Descend about 30 ft. over N. slope
- 67.00 Ravine 10 lks. wide, course W.; Ascend 120 ft. over S. slope
- 72.00 Top of spur bears W.; Descend 30 ft. over N. slope.
- 78.00 Ravine 6 lks. wide, course S70° W.; Ascend
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. with marked stone at base, 27 ins. in the ground for cor. of secs. 25, 26, 35, and 36, marked on brass cap



Chains

Land rolling and hilly.
Soil sandy and stony 2nd. and 3rd. rate.
No timber.
Undergrowth, greasewood and oak brush.

SURVEY

40.00 East on a random line bet. secs. 25 and 36
Set temp. $\frac{1}{4}$ sec. cor.
79.98 Intersect E. bdy. of Tp. 3 lks. N. of the cor. of secs. 25 and
36, hereinbefore described.
Thence
N $89^{\circ}59'W$. on true line bet. secs. 25 and 36.
Descend 170 ft. over stony W. slope, through dense oak
and greasewood brush undergrowth.
15.00 Dry ravine 15 lks. wide, course $N50^{\circ}W$.; Ascend 120 ft. over
NE. slope.
39.99 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the
ground for $\frac{1}{4}$ sec. cor., marked on brass cap
S 25

$\frac{1}{4}$
S 36

1924

47.50 Raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high N. of cor.
Top of ridge bears $N60^{\circ}W$. and $S60^{\circ}E$.; Descend 23 ft. over
NW. slope.
71.00 Ravine 10 lks. wide, course $S70^{\circ}W$. thence along SE. slope
79.98 The cor. of secs. 25, 26, 35, and 36.
Land rolling and hilly.
Soil sandy and stony 2nd. and 3rd. rate.
No timber.
Undergrowth, greasewood and oak brush.

SURVEY

7.10 N $0^{\circ}01'W$. bet. secs. 25 and 26.
16.00 Ascend S. slope of ridge 61 ft. over stony hilly land,
through dense oak and greasewood brush under-
growth
40.00 Top of ridge, bears $N80^{\circ}E$. and $S80^{\circ}W$.; Descend 140 ft.
Spur bears W.; continue descent over NW. slope
Foot of descent in valley bears $N60^{\circ}W$. and $S60^{\circ}E$.
Set an iron post 3 ft. long, 1 in. in diam. with marked
stone at base, 27 ins. in the ground for $\frac{1}{4}$ sec.
cor., marked on brass cap

$\frac{1}{4}$
S26 S25
1924

40.60 From this point, Cor. No. 4 of H.E.S. No. 344 bears $N45^{\circ}16'E$.
12.37 chs. dist.
The SE. cor. of ranch house belonging to Howard Contreras
bears $S81\frac{1}{2}^{\circ}E$ about 30.00 chs. dist.
The door in new house under construction bears $N86\frac{1}{4}^{\circ}E$.
about 25.00 chs. dist.

Independent Resurvey of Part and
Survey of Part (Completion) of the subdivision of T 15 N., R 4 W.

57

Chains

- 41.09 Intersect S.bdy. of H.E.S.No.344 18.59 chs.N62°49'W. of cor.No.6 of said claim.
 41.50 Enter dense brush undergrowth, bears N. and SE.; Enter
 41.50 Wire fence, bears N63 $\frac{1}{4}$ °W. and S63 $\frac{1}{4}$ °E.; Enter cultivated
 land, bears NW. and SE.
 52.49 Wire fence bears, N62 $\frac{1}{4}$ °W. and S62 $\frac{1}{4}$ °E.
 52.59 Intersect N.bdy. of H.E.S.No.344 9.59 chs.N66°35'W. of cor
 No.4 of said claim.; Leave cultivated land, bears
 NW. and SE.
 52.45 Road from Skull Valley Ariz. to Howard Contrera's ranch
 bears NW. and SE.
 52.70 Enter dense oak and juniper brush undergrowth, bears NW.
 and SE.; Ascend 23 ft. over SW. slope.
 73.50 Top of ridge bears E. and W.; Descend 34 ft. over N. slope.
 79.00 Foot of descent; leave undergrowth, bears NW. and SE.
 79.41 Wire fence, bears N60°50'W. and S60°50'E.; Enter culti-
 vated land, bears NW. and SE.
 79.67 Intersect S.bdy. of H.E.S.No.345 13.86 chs.S60°37'E. of
 cor.No.12 of said claim.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., with marked
 stone at the base, 27 ins. in the ground for
 reestablished cor. of secs.23, 24, 25, and 26, marked
 on brass cap

T15N	R4W
S23	S24

S26	S25
-----	-----

1924

Note; From this point the identified original cor. of secs.
 23, 24, 25, and 26, hereinbefore described, bears
 N 66°00'E. 16.55 chs. dist.

Land level and rolling hills.
 Soil sandy and gravelly 1st. and 2nd. rate.
 No timber.
 Undergrowth, greasewood, juniper, and oak brush.

SURVEY

- 40.00 S 89°59'E. on a random line bet. secs. 24 and 25.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.00 Intersect E.bdy. of Tp. 14 lks. S. of the cor. of secs. 24
 and 25, hereinbefore described.
 Thence
 S 89°55'W. on true line bet. secs. 24 and 25.
 Descend 40 ft. over NW. slope through dense oak and
 greasewood brush undergrowth.
 6.20 Dry ravine 20 lks. wide, course S40°W.; Road in bottom
 of ravine bears NE. and SW.; Ascend 11 ft. over
 SE. slope
 8.00 Top of ascent on hill bears N. and S.; Descend 200 ft.
 over general W. slope.
 38.50 Top of ridge bears NE. and SW.; From this point a house
 belonging to Howard Contreras, bears S22 $\frac{1}{4}$ °E. about
 30.00 chs. dist.
 Another house belonging to Howard Contreras
 bears S18°E. about 25.00 chs. dist.

Independent Resurvey of Part and
Survey of Part (Completion) of the Subdivision of T 15 N., R 4 W.

Chains

40.00 Set an iron post 3 ft. long, 1 in. in diam. with markd. stone at the base, 27 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 24
S 25

1924

55.81 Intersect E. bdy. of H.E.S. No. 345-11.31 chs. S53°30'E. of cor. No. 1 of said claim.

61.10 Wire fence bears NW. and SE.; Leave dense undergrowth at foot of descent in valley, bears NW. and SE.; Enter level cultivated bottom land.

62.50 Road from Skull Valley to Howard Contrera's ranch, bears NW. and SE.

74.40 Wire fence bears N20°E. and S20°W.

80.00 The reestablished cor. of secs. 23, 24, 25, and 26. Land level and hilly.

Soil sandy and stony 1st. and 2nd. rate.

No timber.

Undergrowth, greasewood and oak brush.

RESURVEY

N 0°1'W., on true line, bet. secs. 23 and 24.

Over level sandy cultivated land.

6.50 Wire fence, bears N88 $\frac{3}{4}$ °E. and S88 $\frac{3}{4}$ °W.; Leave cultivated land bears NE. and SW.

6.57 Intersect S. bdy. of Tract No. 44 15.12 chs. S89°24'W. of cor. No. 4 of said tract, hereinbefore described.

9.00 Road from Skull Valley Arizona to Howard Contrera's ranch bears N80°W. and S80°E.

11.00 Leave level valley, bears NW. and SE.; Enter hilly land covered with dense oak brush undergrowth and scattering oak and juniper timber.; Ascend 23 ft. over S. slope.

32.25 Top of ridge bears NE. and SW.; Descend 28 ft. over NW. slope.

37.00 Foot of descent; Enter level land, bears E. and W.

40.00 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S 23 S 24

1924

from which,

An oak 12 ins. in diam. bears N80°E. 99 lks. dist., marked $\frac{1}{4}$ S 24 BT.

An oak 12 ins. in diam. bears N48 $\frac{3}{4}$ °W. 102 lks. dist., marked $\frac{1}{4}$ S 23 BT.

42.00 Leave level land bears E. and W.; Ascend 31 ft. over S. slope over hilly land.


50.40 Top of ridge bears E. and W.; Descend 29 ft. over N. slope

75.70 Foot of descent.; Leave hilly land and brush undergrowth bears E. and W.; Enter level bottom land.

Independent Resurvey of Part and Survey of Part (Completion) of the Subdivision of T 15 N., R 4 W.

Chains

80.00 Set an iron post 3 ft. long, 2 ins. in diam, with marked stone at the base, 27 ins. in the ground for reestablished cor. of secs. 13, 14, 23, and 24, marked on brass cap




from which

A wild cherry 15 ins. in diam. bears N12 1/4° W. 120 lks. dist. marked T15N., R4W., S 14 BT.
A black walnut 12 ins. in diam bears S84 1/4° W. 246 lks. dist., marked T15N., R4W., S23 BT.

Note From this point Cor. No. 1 of Tract No. 44, hereinbefore described, bears N57° 36' E. 18.02 chs. dist. Land level and hilly. Soil sandy and gravelly 1st. and 2nd. rate. Timber wild cherry, walnut, juniper and oak. Undergrowth juniper and oak brush.

SURVEY

40.00 N 89° 55' E. on a random line bet. secs. 13 and 24. Set temp. 1/4 sec. cor.
79.94 Intersect E. bdy. of Tp. 3 lks. S. of reestablished cor. of secs. 13 and 24, hereinbefore described.
Thence
S 89° 54' W. on true line bet. secs. 13 and 24.
Descend 150 ft. over W. slope over stony mountainous land through oak and greasewood brush undergrowth.
31.94 Foot of descent in valley.; leave mountainous land, bears N70° E. and S70° W.; Enter level sandy land and scattering oak and walnut timber, bears NE. and SW.
32.94 Sand wash 20 lks. wide, 3 ft. deep, course S70° W.
39.97 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for 1/4 sec. cor., marked on brass cap



from which,

A walnut 10 ins. in diam. bears N74 1/2° W. 137 lks. dist., marked 1/4 S 13 BT.
A walnut 12 ins. in diam. bears S11 1/2° W. 113 lks. dist., marked 1/4 S 24 BT.
45.00 Leave scattering timber bears NE. and SW.
64.75 Intersect the E. bdy. of Tract. No. 44, 9.63 chs. S0° 06' W. of cor. No. 1 of said tract.
65.14 Wire fence bears N. 8.00 chs. dist. and S. about 72.00 chs. dist.
69.94 Sand wash 70 lks. wide, 2 1/2 ft. deep, course N60° W.
79.94 The reestablished cor. of secs. 13, 14, 23, and 24. Land level and mountainous. Soil sandy and stony 1, 2, and 3rd. rate.

Chains.

Timber oak and walnut.
Undergrowth, oak, and greasewood brush.

RESURVEY

- N 0°01'W., on true line, bet. secs. 13 and 14.
Over level sandy land in valley.
- 2.90 Wash 39 lks. wide 3 ft. deep, course SW.
5.10 Wood road, bears NE. and SW.
6.50 Wire fence bears N 89°40'E. 15.00 chs. and S 89°40'W. 25.00
chs. dist. Leave level valley bears N 70°E. and S 65°W.
Enter rolling stony land and oak brush undergrowth
- 8.41 Intersect N. bdy. of Tract No. 44 15.22 chs. S 85°18'W. of
cor. No. 1 of said tract, hereinbefore described.
- 15.00 Enter scattering oak and juniper timber, bears NE. and SW.
30.70 A frame house belonging to Thaddeus Mullen, bears W. 200
lks. dist.
- 31.24 Intersect S. bdy. of Tract No. 40, 5.10 chs. East of cor. No.
9 of said Tract, hereinbefore described.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the
ground for reestablished $\frac{1}{4}$ sec. cor., marked on
brass cap

$\frac{1}{4}$
|
S 14 | S 13

1924

from which,

- A juniper 34 ins. in diam. bears N 39 $\frac{1}{2}$ °E. 206 lks. dist.,
marked $\frac{1}{4}$ S. 13 BT.
A juniper 44 ins. in diam. bears S 18 $\frac{1}{4}$ °W. 43 lks. dist.,
marked $\frac{1}{4}$ S 14 BT.

Note: From this point the original $\frac{1}{4}$ sec. cor. of secs.
13 and 14, T 15 N., R 4 W., which is a granite stone
24x15x12 ins., loosely set in a mound of stone, marked
 $\frac{1}{4}$ S on W. face and witnessed by two oak bearing trees
one each SE. and SW.; bears N 54°03'E. 18.92 chs. dist.
Destroy this cor. and obliterate the marks on the
old bearing trees.

- 45.00 Leave rolling stony land and timber and brush, bears NE.
and SW.; Enter level sandy valley land.
- 45.80 Old ranch road bears NE. and SW.
49.00 Enter plowed field bears NE. and SW.
63.20 Gulch 25 lks. with cut banks 10 ft. high, course SW.
69.00 Leave plowed land bears N 40°E. and S 60°W.
71.00 Road bears NE. and SW.
71.61 Intersect N. bdy. of Tract No. 40. 4.32 chs. West of cor. No.
3 of said tract, hereinbefore described.
- 75.75 Wire fence bears N 78 $\frac{3}{4}$ °W. about 10.00 chs. and S 78 $\frac{3}{4}$ °E. about
12.00 chs. dist.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the
ground for reestablished cor. of secs. 11, 12, 13, and
14, marked on brass cap

T15N R4W
S11 | S 12

S14 | S 13

1924

Independent Resurvey of Part and Survey of Part (Completion) of the Subdivision of T 15 N., R 4 W.


Chains

Raise a mound of stone 2 ft. base, 1 1/2 ft. high W. of cor. Note; From this point the orig. cor. of secs. 11, 12, 13, and 14 hereinbefore described, bears N49°49'E. 18.26 chs. dist.

Land level and rolling. Soil sandy and stony 1st. 2nd, and 3rd. rate. Timber scattering oak and juniper. Undergrowth oak, manzanita, and juniper brush.

SURVEY

- 40.00 N 89°54'E., on random line, bet. secs. 12 and 13.
- 79.95 Set temp. 1/4 sec. cor. Intersect E. bdy. of Tp. 3 lks. N. of reestablished cor. of secs. 12 and 13, hereinbefore described. Thence S 89°55'W., on true line, bet. secs. 12 and 13. Descend 29 ft. over NW. slope over stony hilly land thru. scattering oak and greasewood brush undergrowth.
- 8.95 Old well on line.
- 17.45 Sand wash 15 lks. wide, course SW.; Ascend 47 ft. over SE. slope of ridge.
- 35.00 Top of ascent on ridge, bears NE. and SW. thence over nearly level land.
- 39.98 Set an iron post 3 ft. long, 1 in. in diam. 20 ins. in the ground to bedrock, supported in a mound of stone for 1/2 sec. cor., marked on brass cap



1924

from which,

- A juniper 8 ins. in diam bears N29 1/2° E. 75 lks. dist., marked 1/4 S 12 BT.
- A juniper 16 ins. in diam. bears S52 1/4° E. 571 lks. dist., marked 1/4 S 13 BT.

- 43.45 Descend 109 ft. over NW. slope of ridge.
- 54.95 Foot of descent; Leave hilly land bears NE. and SW.; Enter level valley.
- 65.59 Intersect E. bdy. of Tract No. 40, 160 lks. S 1°56'E. of cor. No. 1 of said tract, hereinbefore described.
- 66.95 Old road bears NW. and SE., no longer travelled.
- 74.25 Old road bears NE. and SW.
- 75.63 Intersect W. bdy. of Tract No. 40, 161 lks. South of cor. No. 2 of said tract, hereinbefore described.
- 79.95 The reestablished cor. of secs. 11, 12, 13, and 14. Land level and hilly. Soil sandy and stony 2nd. and 3rd. rate. Timber scattering juniper near 1/2 sec. cor. Undergrowth, greasewood and oak brush.

RESURVEY


- 3.00 N 0°01'W., on true line, bet. secs. 11 and 12. Over rolling stony land, through oak brush undergrowth. Leave rolling Bears NE. and SW.; Ascend 138 ft. over SE. slope of ridge.
- 3.05 Road from Skull Valley to Prescott Arizona, bears NE. and SW.
- 12.28 Intersect the S. bdy. of Tract No. 39, 13.96 chs. N87°56'W. of cor. No. 5 of said tract

Chains

hereinbefore described.

.32.30 Top of ascent on ridge bears NE. and SW. thence along top of same.


.40.00 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap



Raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high W. of cor. Note; From this point the identified orig. $\frac{1}{4}$ sec. cor. of secs. 11 and 12, T15N., R4W., hereinbefore described bears N45°E. 18.36 chs. dist.

60.00 Low divide bears E. and W.; Descend 63 ft. over N. slope.

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the ground for reestablished cor. of secs. 1, 2, 11, and 12 marked on brass cap



Raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high W. of cor. Land rolling and hilly. Soil stony 2nd. and 3rd. rate. No timber. Undergrowth, greasewood and ocotillo brush.

Note; From this point the identified orig. cor. of secs. 1, 2, 11, and 12, hereinbefore described, bears N44 $\frac{1}{4}$ °E. 19.40 chs. dist.

SURVEY

N 89°55'E., (on random line, bet. secs. 1 and 12.)

.40.00 Set temp. $\frac{1}{4}$ sec. cor.


80.06 Intersect E. bdy. of Tp. at the reestablished cor. of secs. 1 and 12, hereinbefore described.

0.25 Thence S. 89° 55' W., on true line, bet. secs. 1 and 12. Wash, course N 15° W. bet. secs. 1 and 12.

10.00 Ascend 79 ft. over SE. slope over stony hilly land, through greasewood brush undergrowth.

40.03 Top of ridge bears NE. and SW.; Descend 195 ft. over NW. slope.

40.03 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap



Raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high N. of cor. From this cor. center of dam 150 ft. long for storage reservoir bears N. about 7.00 chs. dist.


Independent Resurvey of Part and
Survey of Part (Completion) of the Subdivision of T 15 N., R 4 W.

Chains

- 50.76 Road to reservoir at foot of descent, bears N. and S.; Asc. 79 ft. over NE. slope.
- 55.46 Road from Skull Valley to Prescott Arizona, bears N20°E. and S20°W.
- 66.71 Intersect E. bdy. of Tract No. 39., 13.88 chs. S0°45'W. of cor. No. 1 of said tract.
- 80.06 The reestablished cor. of secs. 1, 2, 11, and 12.
Land hilly.
Soil stony 3rd. and 4th. rate.
No timber.
Undergrowth, scattering greasewood and oak brush.

RESURVEY

- 40.00 N 0°01'W. on random line, bet. secs. 1 and 2. 1 sec. 2.
Set temp. 1/4 sec. cor.
- 80.04 Intersect N. bdy. of Tp. 8 lks. W. of the cor. of secs. 1, 2, 35 and 36, hereinbefore described.
Thence
S 0°02'W. on true line bet. secs. 1 and 2.
Descend 15 ft. over S. slope over stony hilly land.
- 2.54 Dry sand wash 15 lks. wide, course N70°W.; Ascend 110 ft. over NE. slope of spur.
- 25.05 Top of spur bears N80°E.; Descend 68 ft. over SE. slope.
- 34.05 Foot of descent from spur.; Leave hilly land, bears NE. and SW.; Enter rolling land.
- 40.04 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for reestablished 1/4 sec. cor., marked on brass cap.




- 57.05 Raise a mound of stone 2 ft. base, 1 1/2 ft. high W. of cor.
- 65.08 Wash 20 lks. wide, 2 ft. deep, course NE.
Intersect the N. bdy. of Tract No. 39., 13.58 chs. N85°31'W. of cor. No. 1 of said tract.
- 70.00 Leave rolling land bears NE. and SW.; Enter hilly land.; Ascend 86 ft. over NW. slope to
- 80.04 The reestablished cor. of secs. 1, 2, 11, and 12.
Land rolling and hilly.
Soil sandy and stony 2nd. and 3rd. rate.
No timber.
Undergrowth, scattering oak brush.

RESURVEY

- From the reestablished cor. of secs. 34 and 35 on S. bdy. of Tp. hereinbefore described.
- N 0°01'W. bet. secs. 34 and 35.
Over rolling stony land, through dense oak brush undergrowth.
- 14.00 Sand wash 20 lks. wide 2 ft. deep, course SW.
- 40.04 (40.00 chs. S0°01'E. from intersection with Sectional Correction Line
Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base, 27 ins. in the ground for reestablished 1/4 sec. cor. marked on brass cap

Independent Resurvey of Part and
Survey of Part (Completion) of the Subdivision of T 15 N., R 4 W.


Chains



43.50
48.10
80.04

Note: From this point the orig. $\frac{1}{4}$ sec. cor. of secs. 34 and 35, which is a decayed post $2\frac{1}{2}$ ins. in diam. $1\frac{1}{2}$ ft. long, firmly set, marked $\frac{1}{4}$ S. bears $N88^{\circ}35'E$. 8.50 chs. dist.; Destroy all evidence of the old cor.

Ravine 10 fks. wide, course $S60^{\circ}W$.
Telephone line to Tonto Springs Ranger Station bears E and W.
Intersect the Sectional Correction Line at the temp. cor. of secs. 26, 27, 34, and 35.; At point of intersection Set an iron post 3 ft. long, 2 ins. in diam. with marked stone at base, 27 ins. in the ground for reestablished cor. of secs. 26, 27, 34, and 35, marked on brass cap




Note; From this point the orig. cor. of secs. 26, 27, 34, and 35, which is a post 3 ins. in diam. projecting 12 ins. above ground, greatly decayed with marks nearly obliterated, bears $N80^{\circ}17'E$. 9.16 chs. dist. I destroy all evidence of this corner.

Land rolling and hilly.
Soil stony 2nd. and 3rd. rate.
No timber.
Undergrowth oak brush.

SURVEY

From cor. of secs. 25, 26, 35, and 36,
West on Sectional Correction line bet. secs. 26 and 35.
Along SE. slope of ridge over stony hilly land, through dense oak brush undergrowth.
10.00 Descend 46 ft. over NW. slope.
15.00 Ascend 34 ft. over SE. slope.
27.00 Top of ridge bears NE. and SW.; Descend 92 ft. over NW. slope.
40.00 Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base, 15 ins. in the ground to bedrock supported in a mound of stone for $\frac{1}{4}$ sec. cor., marked on brass cap




80.00 The reestablished cor. of secs. 26, 27, 34, and 35.
Land hilly.
Soil stony 2nd. and 3rd. rate.
No timber.
Undergrowth, oak brush.


Independent Resurvey of Part and Survey of Part (Completion) of the subdivision of T 15 N., R 4 W.

Chains RESURVEY

- N 0°01' W., on true line, bet. secs. 26 and 27. Over stony hilly land, through scattering oak and juniper timber and dense oak brush undergrowth.
- 22.66 Intersect S. bdy. of H.E.S. No. 343 3.56 chs. S 81°49' W. of cor. No. 2 of said tract.
- 32.99 Intersect the E. bdy. of H.E.S. No. 343 10.43 chs. N 19°43' W. of cor. No. 2 of said tract.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base, 27 ins. in the ground for reestablished 1/4 sec. cor., marked on brass cap



- No trees suitable for bearing trees within limits. Note; from this point a cedar post set by local survey for reestablished 1/4 sec. cor. of secs. 26 and 27 bears N 70°40' E. 11.66 chs. dist.; obliterate marks on the post and bearing tree to same.
- 64.00 Leave hilly land, timber, and brush, bears NE. and SW.; Enter level valley.
- 64.66 Intersect S. bdy. of tract No. 43. 8.19 chs. N 89°00' E. of cor. No. 5 of said tract.
- 66.00 Road from Skull Valley to Prescott Arizona, bears NE. and SW.
- 67.20 Sand wash 50 lks. wide 4 ft. deep, course SW.
- 75.20 Branch of Skull Valley-Prescott road bears NE. and SW.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. with marked stone at the base, 27 ins. in the ground for reestablished cor. of secs. 22, 23, 26, and 27, marked on brass cap



Note; From this point the orig. cor. of secs. 22, 23, 26, and 27, hereinbefore described bears N 65°25' E. 14.30 chs. dist.

Land level and hilly. Soil sandy and stony 2nd. rate. Timber scattering juniper and oak. Undergrowth, oak brush.

RESURVEY

- 40.00 East on a random line bet. secs. 23 and 26 Set temp. 1/4 sec. cor.
- 80.04 Intersect N. and S. line 5 lks. N. of the reestablished cor. of secs. 23, 24, 25, and 26. Thence N 89°58' W. (on true line, bet. secs. 23 and 26. Over level cultivated land in valley.

Independent Resurvey of Part and
66 Survey of Part (Completion) of the Subdivision of T 15 N., R 4 W.


Chains	
58	Intersect S.bdy. of H.E.S. No. 345 13.18 chs. S60°37'E. of cor. No. 12 of said tract.
1.54	Wire fence bears NW. and SE.; Leave level cultivated land bears NW. and SE.; Enter hilly land and oak brush undergrowth.
25.84	Wire fence bears N2 $\frac{3}{4}$ °W. and S2 $\frac{3}{4}$ °E.
25.87	Intersect E.bdy. of H.E.S. No. 344 6.32 chs. S2°45'E. of cor. No. 1 of said tract.
31.84	Ranch road bears NW. and SE.
32.74	Wire fence, bears N46 $\frac{1}{2}$ °W. and S46 $\frac{1}{2}$ °E.
36.24	Leave hilly land and undergrowth, bears NW. and SE.; Enter cultivated land.
40.02	Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4} \frac{S23}{S26}$ 1924
	from which
	An oak 11 ins. in diam. bears N38 $\frac{1}{4}$ °E. 241 lks. dist., marked $\frac{1}{4}$ S 23 BT.
	An oak 16 ins. in diam. bears S32°W. 352 lks. dist., marked $\frac{1}{4}$ S 26 BT.
	Note; From this point the orig. $\frac{1}{4}$ sec. cor. of secs. 23 and 26 hereinbefore described, bears N65°32'E. 15.21 chs. dist.
40.24	Leave cultivated land bears NW. and SE.
42.34	Wire fence bears N47 $\frac{1}{2}$ °E. and S47 $\frac{1}{2}$ °W.
44.54	Enter scattering oak timber and brush undergrowth, bears NW. and SE.
50.04	Leave timber and brush bears NE. and SW.
56.29	Wire fence bears N31 $\frac{3}{4}$ °E. and S31 $\frac{3}{4}$ °W.
56.34	Intersect W.bdy. of H.E.S. No. 344 5.15 chs. N31°40'E. of cor. No. 8 of said claim.
58.04	Ranch road bears N70°E. and S70°W.
59.04	Road from Skull Valley to Prescott Arizona, bears NE. and SW.
66.05	Sand wash 50 lks. wide 5 ft. deep, course SW.
67.31	Intersect E.bdy. of Tract No. 43. 5.96 chs. S2°40'W. of cor. No. 7 of said tract.
73.64	Branch of the Skull Valley-Prescott road bears NE. and SW.
80.04	The reestablished cor. of secs. 22, 23, 26, and 27. Land level and hilly. Soil sandy and stony 1st. and 2nd. rate. Timber scattering oak. Undergrowth oak brush.

SURVEY

	N 0°01'W. (bet. secs. 22 and 23. 22 and 23. Over level sandy land.
10.00	Enter scattering juniper and oak timber and brush undergrowth, bears E. and W.
12.30	Leave level valley land, bears E. and W.; Enter mountainous land.; Ascend 250 ft. over stony S. slope.
25.95	Intersect N. bdy. of Tract No. 43. 6.99 chs. E. of cor. No. 9 of said tract.
40.00	Set an iron post 3 ft. long, 1 in. in diam. 4 ins. in the ground to bedrock supported in a mound of stone for $\frac{1}{4}$ sec. cor., marked on brass cap


Independent Resurvey of Part. and Survey of Part (completion) of the subdivision of T 15 N., R 4 W.

Chains



from which

- A pinion 8 ins. in diam. bears N32 $\frac{1}{4}$ °E. 157 lks. dist., marked $\frac{1}{4}$ S 23 BT.
- A pinion 10 ins. in diam. bears N44°W. 189 lks. dist., marked $\frac{1}{4}$ S 22 BT.
- 56.00 Top of spur bears E.; Desc. 75 ft. over NE. slope
- 61.00 Ravine course N70°E. thence along E. slope.
- 68.00 Ravine course SE.; Asc. 75 ft. over SE. slope.
- 75.80 Top of spur bears SE.; thence along E. slope of high ridge.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. with marked stone at the base, 3 ins. in the ground to bedrock supported in a mound of stone for cor. of secs. 14, 15, 22, and 23, marked on brass cap




No bearing trees available.

Land level and mountainous.
 Soil sandy and stony 1st. 3, rd. and 4th. rate.
 Timber oak, juniper, and pinion.
 Undergrowth oak and juniper brush.

RESURVEY and SURVEY

- 40.00 S 89°58'E. on a random line bet. secs. 14 and 23.
- 80.12 Set temp $\frac{1}{4}$ sec. cor.
- Intersect N. and S. line 5 lks. N. of the reestablished cor. of secs. 13, 14, 23, and 24.
- Thence RESURVEY
- N 89°56'W. on true line bet. secs. 14 and 23
- Over level land, through scattering oak timber.
- 6.92 Sand wash 25 lks. wide 3 ft. deep. course SW.
- 17.92 Ranch road bears NW. and SE.
- 26.07 Wire fence bears N. and S.
- 26.18 Intersect W. bdy. of Tract No. 44 6.27 chs. S0°01'W. of cor. No. 2 of said tract.
- 28.12 Sand wash 25 lks. wide, course S15°W.
- 31.27 Road from Skull Valley to Prescott, Arizona, bears N. and S.
- 33.00 Base of mountain.; Leave level valley land bears N. and S.
- Asc. 290 ft. over E. slope over mountainous land.
- 40.06 Set an iron post 3 ft. long 1 in. in diam. over cross (x) on bedrock, supported in a mound of stone for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap



68 Independent Resurvey of Part and
Survey of Part (Completion) of the Subdivision of T 15 N., R 4 W.

Chains

SURVEY

Continue line and measurement

56.12 Top of spur bears $S70^{\circ}E.$; Desc. about 12 ft. over SW. slope
68.15 Gulch 5 lks. wide, course SE.; Asc. 148 ft. over NE. slope.
80.12 The cor. of secs. 14, 15, 22, and 23.
Land level and mountainous.
Soil sandy and stony 2nd, 3rd., and 4th. rate.
Timber scattering oak.
Undergrowth oak brush.

SURVEY

N $0^{\circ}01'W.$ bet. secs. 14 and 15.
Over stony mountainous land, through greasewood and oak
brush undergrowth.

9.00 Descend 28 ft. over NE. slope
Foot of descent.; Asc. 102 ft. over SE. slope.
40.00 Set an iron post 3 ft. long 1 in. in diam. with marked stone
at the base, 2 ins. in the ground to bedrock,
supported in a mound of stone for $\frac{1}{4}$ sec. cor.,
marked on brass cap

 $\frac{1}{4}$

S15 | S14

1924

47.70 Top of ascent on spur bears NE.; Desc. 98 ft. over NW. slope
80.00 Set an iron post 3 ft. long, 2 ins. in diam. with marked
stone at the base, 18 ins. in the ground to
bedrock, supported in a mound of stone for re-
established cor. of secs. 10, 11, 14, and 15., marked
on brass cap

T15N	R4W
S10	S11
S15	S14

1924

Note; From this point the orig. cor. of secs. 10, 11, 14,
and 15, hereinbefore described bears $N35^{\circ}04'E.$
18.06 chs. dist.

Land mountainous.
Soil stony 3rd. and 4th. rate.
Timber, scattering oak.
Undergrowth oak brush.


RESURVEY

40.00 S $89^{\circ}56'E.$ on a random line bet. secs. 11 and 14.
Set temp. $\frac{1}{4}$ sec. cor.
80.18 Intersect N. and S. line 10 lks. S. of the reestablished
cor. of secs. 11, 12, 13, and 14.
Thence
West, on true line, bet. secs. 11 and 14, sec. 11 and 14.
Over rolling stony land on S. slope.
5.00 Road from Skull Valley to Prescott Arizona, bears NE. and
SW.
21.00 Enter scattering oak timber and brush undergrowth, bears
N. and S.
22.70 Dry sand wash 20 lks. wide 1 ft. deep, course $S10^{\circ}E.$

Independent Resurvey of Part and Survey of Part (completion) of the subdivision of T 15 N., R 4 W.

Chains

- 25.30 Road from Skull Valley Arizona to Redmond Toohy's ranch bears NW. and SE.
- 25.50 Leave rolling land bears NW. and SE.; Enter mountainous land Ascend 195 ft. over SE. slope.
- 40.09 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap




1924

- Raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high N. of cor.
- 45.30 Dry ravine 10 lks. wide, course SW. Continue ascent 120 ft. over NE. slope to
- 80.18 The reestablished cor. of secs. 10, 11, 14, and 15. Land rolling and mountainous. Soil stony 2nd. and 3rd. rate. Timber, scattering oak. Undergrowth oak brush.


RESURVEY

- N 0°01' W. bet. secs. 10 and 11.
- Over stony mountainous land through scattering oak and juniper timber and brush undergrowth.
- 14.00 Top of spur bears E.; Descend gradually over NE. slope
- 35.00 Sand wash 20 lks. wide 2 ft. deep, course NE.; Leave mountainous land bears NE. and SW.; Enter rolling land.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. marked on brass cap



1924

- No trees suitable for bearing trees within limits.
- Raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high W. of cor.
- 47.00 Sand wash 15 lks. wide 3 ft. deep, course E.; leave level and rolling land, bears E. and W.; Ascend 70 ft. over S. slope over stony mountainous land.
- 54.50 Top of spur bears E.; Descend 50 ft. over N. slope.
- 78.00 Foot of descent.; Leave mountainous land, bears NW. and SE.; Enter rolling land.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the ground for reestablished cor. of secs. 2, 3, 10, and 11 marked on brass cap



1924

from which
 An oak 4 ins. in diam. bears N36 $\frac{1}{2}$ ° E. 308 lks. dist., marked T15N., R4W. S 2 BT.
 A juniper 20 ins. in diam. bears S12 $\frac{1}{2}$ ° E. 326 lks. dist., marked T15N., R4W. S 11 BT.

Chains

A juniper 30 ins. in diam. bears $S1\frac{1}{4}^{\circ}W$. 210 lks. dist.,
marked T15N., R4W. S 10 BT.
An oak 6 ins. in diam. bears $N59\frac{1}{4}^{\circ}W$. 165 lks. dist.,
marked T15N., R4W. S 3 BT.

Note: From this point the orig. cor. of secs. 2, 3, 10, and 11
hereinbefore described, bears $N24^{\circ}50'E$. 19.00 chs.
dist.

Land rolling and mountainous.
Soil stony 2nd. and 3rd. rate.
Timber scattering oak and juniper.
Undergrowth oak and juniper brush.

RESURVEY

East on a random line bet. secs. 2 and 11.
40.00 Set temp. $\frac{1}{4}$ sec. cor.
80.10 Intersect N. and S. line 8 lks. S. of the reestablished
cor. of secs. 1, 2, 11, and 12:
Thence
S $89^{\circ}57'W$. on true line bet. secs. 2 and 11.
Descend 69 ft. over NW. slope, over stony mountainous land.
through scattering oak brush undergrowth.
20.60 Sand wash 20 lks. wide 2 ft. deep course NE.: Enter rolling
land bears NE. and SW.
32.10 Leave rolling land, bears NE. and SW.: Ascend 140 ft. over
SE. slope through dense oak brush undergrowth.
40.05 Set an iron post 3 ft. long, 1 in. in diam. with marked
stone at the base, 10 ins. in the ground to bedrock
supported in a mound of stone for reestablished $\frac{1}{4}$
sec. cor., marked on brass cap

$$\frac{1}{4} \frac{S 2}{S 11}$$

1924

Note: From this point the orig. $\frac{1}{4}$ sec. cor. of secs. 2 and
11 hereinbefore described bears $N26^{\circ}28'E$. 19.54 chs.
50.90 Top of ridge bears N. and SE. Desc. 90 ft. over SW. slope.
71.60 Intersect W. bdy. Tract 39 17.25 chs. $S. 1^{\circ}43'E$, of cor. No. 3.
76.50 Sand wash 20 lks. wide 2 ft. deep, course NW. Leave stony
mountainous land bears NW. and SE.: Enter rolling,
sandy land.
78.40 Road from Skull Valley Arizona to Redmond Toohy's ranch
bears NW. and SE.
80.10 The reestablished cor. of secs. 2, 3, 10, and 11.
Land rolling and mountainous.
Soil sandy and stony 2nd. and 3rd. rate.
Timber scattering oak and juniper.
Undergrowth, oak and juniper brush.


RESURVEY

N. $0^{\circ}02'E$. on a random line bet. secs. 2 and 3.
40.00 Set temp. $\frac{1}{4}$ sec. cor.
80.24 Intersect N. bdy. of T. 10 lks. E. of the cor. of secs. 2, 3, 34,
and 35 hereinbefore described.
Thence
S. $0^{\circ}02'E$. on true line bet. secs. 2 and 3.
Ascend 40 ft. over NW. slope, over stony mountainous land
through oak and juniper timber and brush under-
growth.

Independent Resurvey of Part and Survey of Part (Completion) of the Subdivision of T 15 N., R 4 W.

Chains

- 23.25 Top of spur bears NW.: Descend 50 ft. over SW. slope.
- 33.74 Sand wash 15 lks. wide 2 ft. deep, course W.: Asc. 70 ft. over N. slope.
- 40.24 Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base, 10 ins. in the ground to bedrock supported in a mound of stone for reestablished $\frac{1}{4}$ sec. cor. marked on brass cap




No trees suitable for bearing trees within limits.

- Note: From this point the orig. $\frac{1}{4}$ sec. cor. of secs. 2 and 3 hereinbefore described bears N21°56'E. 20.16
- 43.04 Top of spur bears N. 70° W. Desc. 108 ft. over SE. slope.
- 63.40 Intersect S. bdy. Tract 38, S. 87° 7' W., 7.99. chs. from cor. 9.
- 73.14 Sand wash 15 lks. wide 1 ft. deep course SW.
- 74.24 Leave timber and brush bears NW. and SE.
- 76.44 Sand wash 20 lks. wide 3 ft. deep course NW.: Leave stony mountainous land bears NW. and SE.: Enter rolling sandy land.
- 77.54 Road from Skull Valley Arizona to Redmond Toohy's ranch, bears NW. and SE.
- 80.24 The reestablished cor. of secs. 2, 3, 10, and 11. Land rolling and mountainous. Soil sandy and stony 2nd., 3rd., and 4th. rate. Timber scattering juniper and oak. Undergrowth, oak and juniper brush.

RESURVEY

From the reestablished cor. of secs. 33 and 34 on S. bdy. of Tp. hereinbefore described.
 N 0° 02' W., on true line, bet. secs. 33 and 34.
 Over rolling sandy land, through scattering oak timber and brush undergrowth.

- .02 Wire fence bears E. and W.
- 4.90 Road from Skull Valley Arizona to the Tonto Springs Forest Ranger Station, bears NW. and SE.
- 10.70 Wood road bears E. and W.
- 11.50 Wire fence bears E. and W.
- 40.42 (40.00 chs. S0° 02' E. from intersection with Sectional Correction Line)
 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap



from which

- A black oak 14 ins. in diam. bears N62 $\frac{3}{4}$ ° W. 81 lks. dist., marked $\frac{1}{4}$ S 33 BT.
- A white oak 10 ins. in diam. bears S77° E. 62 lks. dist., marked $\frac{1}{4}$ S 34 BT.
- 41.70 Gulch 20 lks. wide 5 ft. deep, course W.
- 44.10 Telephone line from Tonto Springs Forest Service Ranger

72 Independent Resurvey of Part and
Survey of Part (Completion) of the Subdivision of T 15 N., R 4 W.

Chains Station to Prescott Arizona, bears E. and W.
44.50 Tonto Springs Forest Ranger Station bears W. about 19 chs.
dist.
44.80 Road from Tonto Springs Forest Service Ranger Station to
Skull Valley-Prescott road bears E. and W.
46.00 Wire fence bears E. and W.
80.42 Intersect Sectional Correction Line 6 lks. E. of the temp.
cor. of secs. 27, 28, 33, and 34.: At point of intersect-
ion.
Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the
ground for reestablished cor. of secs. 27, 28, 33, and
34, marked on brass cap

T15N	R4W
S28	S27
S33	S34

1924

from which

An oak 10 ins. in diam. bears N 81° E. 203 lks. dist.,

marked T15N., R4W., S27 BT.

An oak 16 ins. in diam. bears N 73° W. 42 lks. dist.,

marked T15N., R4W., S 28 BT.

No other trees within limits.: Deposit a marked stone
at base of post.

Note: From this point, the original cor. of secs. 27, 28, 33,
and 34 bears N 67° 28' E. 7.05 lks. dist. since no
claims are tied to or dependent upon this cor.:
Destroy all evidence of same.

Cor No. 9 of H.E.S. No. 342 bears N 0° 50' W. 6.51 chs. dist.

Land rolling and hilly.

Soil gravelly, sandy, and stony 1st. 2nd., and 3rd. rate.

Timber scattering oak and juniper.

Undergrowth oak brush.

RESURVEY

From the reestablished cor. of secs. 26, 27, 34, and 35
West, on true line, on Sectional Correction Line, bet. secs.
27 and 34.

Over rolling gravelly hills, through scattering oak timb-
er and dense oak brush undergrowth.27.20 Road from Skull Valley to Prescott Arizona, bears N 20° E.
and S 20° W. in bottom of draw course SW.39.97 Set an iron post 3 ft. long, 1 in. in diam. with marked
stone at the base, 27 ins. in the ground for
reestablished $\frac{1}{4}$ sec. cor. of secs. 27 and 34,
marked on brass cap

$\frac{1}{4}$	S 27
	S 34

1924

No trees suitable for bearing trees within limits.

Note: From this point the orig. $\frac{1}{4}$ sec. cor. of secs 27 and
34 which is a post 2 $\frac{1}{2}$ ins. in diam. projecting
8 ins. above ground, greatly decayed, marked $\frac{1}{4}$ on N.
face, bears N 83° 50' E. 7.77 chs. dist.: Since no homestead
surveys are tied to this cor. Destroy the old post
and obliterate marks on bearing tree.

44.50 Road from the Tonto Springs Forest Ranger Station to the

Independent Resurvey of Part and Survey of Part (Completion) of the Subdivision of T 15 N., R 4 W.


Chains

79.94

Skull Valley-PreScott road bears NE. and SW. The reestablished cor. of secs. 27, 28, 33, and 34. Land rolling hills. Soil gravelly 2nd. and 3rd. rate. Timber, scattering juniper and oak. Undergrowth oak and juniper brush?

RESURVEY

- N 0°02' W. on true line, bet. secs. 27 and 28.
- Descend 29 ft. over NE. slope over hilly land, through scattering oak timber and brush undergrowth.
- 5.00 Foot of descent.; Leave hilly land, bears NE. and SW.; Enter level land.
- 5.50 Leave timber and brush bears NE. and SW.
- 6.20 Road from the Tonto Springs Ranger Station to the Skull Valley-PreScott road bears NE. and SW.
- 6.50 Sand wash 30 lks. wide 1 ft. deep, course S60°W.
- 6.61 Intersect S. bdy. of H.E.S. No. 342 14 lks. N41°35'E. of cor. No 9 of said claim.
- 7.30 Wire fence bears NE. and SW.; Enter cultivated land, bears NE. and SW.
- 30.00 Leave cultivated land bears NW. and SE.
- 39.60 Old road bears NW. and SE.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap




from which

- An oak 10 ins. in diam. bears N61°E. 152 lks. dist., marked $\frac{1}{4}$ S 27 BT.
- A hackberry 8 ins. in diam. bears S9 $\frac{3}{4}$ °E. 159 lks. dist., marked $\frac{1}{4}$ S 27 BT.

Note: From this point the orig. $\frac{1}{4}$ sec. cor. of secs. 27 and 28 which is a post 2 ins. in diam., greatly decayed projecting 1 ft. above ground, marked $\frac{1}{4}$ S on W. face bears N72°59'E. 7.07 chs. dist.; Destroy all evidence of this cor.

- 43.00 Leave level land, bears NW. and SE.; Enter stony mountainous land; Asc. 92 ft. over SW. slope
- 47.80 Wire fence bears NW. and SE.
- 48.27 Intersect N. bdy. of H.E.S. No. 342 52 lks. N. 11°1' W. of cor. No. 13 of said claim.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. with marked stone at the base, 18 ins. in the ground to bedrock, supported in a mound of stone for reestablished cor. of secs. 21, 22, 27, and 28, marked on brass cap



From this point the original cor. of secs. 21, 22, 27, and

Independent Resurvey of Part and Survey of Part (Completion) of the Subdivision of T 15 N., R 4 W.

Chains

28, which is a granite stone 14X10X8 ins. above ground firmly set in a mound of stone, marked with 3 notches on E. and 2 notches on S. edges, bears N67°02'E. 12.81 chs. dist. Since cor. No. 1 of H.E.S. No. 341 is tied to this cor. Obliterate the notches on stone and remark stone WP.

A cabin bears S40°W. about 5.00 chs. dist. Land level, hilly, and mountainous. Soil sandy and stony 1st. 2nd., and 3rd. rate. Timber oak. Undergrowth oak brush.

RESURVEY

40.00 East on a random line bet. secs. 22 and 27. Set temp. 1/4 sec. cor. 79.94 Intersect N. and S. line 14 lks. S. of the reestablished cor. of secs. 22, 23, 26, and 27.

Thence S 89°54'W. (on true line) bet. secs. 22 and 27. Over level sandy valley.

7.38 Intersect W. bdy. of Tract No. 43, 5.61 chs. S3°02'W. of cor. No. 4 of said tract.

20.75 Leave level sandy land bears NE. and SW.; Enter stony hilly land.; Ascend 80 ft. over SE. slope through scattering oak timber and dense brush undergrowth.

21.00 Tonto Spring bears North about 30.00 chs. dist.

24.50 Top of spur bears SE.; Descend 38 ft. over SW. slope

27.95 Ravine 5 lks. wide, course S.; Ascend 23 ft. over E. slope

39.97 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for reestablished 1/4 sec. cor., marked on brass cap

S 22
1/4 S 27

1924

No trees suitable for bearing trees available.; Deposit marked stone at base of monument.

Note: From this point the orig. 1/4 sec. cor. of secs. 22 and 27, hereinbefore described bears N67°20'E. 13.80 chs. dist.

48.35 Top of ascent thence over broken stony S. slope
76.74 Descend 54 ft. over SW. slope to
79.94 The reestablished cor. of secs. 21, 22, 27, and 28. Land level and hilly. Soil sandy and stony 2nd. and 3rd. rate. Timber oak. Undergrowth oak brush.

RESURVEY

N 0°02'W. (on true line) bet. secs. 21 and 22. Over SW. slope of spur, over stony mountainous land through scattering juniper and oak timber and dense oak brush undergrowth.

10.50 Ravine 10 lks. wide, course SW.; Ascend 175 ft. over SE. slope.


31.00 Top of spur, bears SW.; Descend 34 ft. over NW. slope.

39.00 Ravine 6 lks. wide, course SW.; Ascend 21 ft. over SE. slope

Independent Resurvey of Part and
 Survey of Part (completion) of the subdivision of T 15 N., R 4 W.

Chains


- 40.00 The point for reestablished $\frac{1}{4}$ sec. cor. falls on a cliff at a point where a permanent cor. can not be established therefore, cut a cross (x) at exact point and continue line and measurement and at
- 40.70 Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base 10 ins. in the ground to bedrock supported in a mound of stone for witness cor. to reestablished $\frac{1}{4}$ sec. cor., marked on brass cap



No trees suitable for bearing trees within limits.

Note; Diligent search in this vicinity fails to reveal any trace of the orig. $\frac{1}{4}$ sec. cor. of secs. 21 and 22

- 45.70 Top of spur bears W.; Descend 63 ft. over N. slope.
- 51.80 Ravine 10 lks. wide., course W. Ascend 118 ft. on W. slope
- 54.30 Ravine 5 lks. wide 4 ft. deep, course SW.
- 63.50 Top of short spur bears N70°W.; Descend 40 ft. over NE. slope.
- 68.00 Ravine 8 lks. wide, course N70°W.; Ascend 50 ft. over SW. slope. to
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. with marked stone at the base, 4 ins. in the ground to bedrock supported in a mound of stone for reestablished cor. of secs. 15, 16, 21, and 22, marked on brass cap



No trees suitable for bearing trees within limits.

Note; From this point the orig. cor. of secs. 15, 16, 21, and 22, which is a granite stone 20X20X10 ins. set in small mound of stone and marked with 3 notches on E. and S. edges, bears N53°05'E. 13.85 chs. dist. No returned areas are dependent upon and no claims of any description are tied to this cor., therefore destroy all evidence of same.

Land broken and mountainous.
 Soil stony 3rd. and 4th. rate.
 Timber scattering juniper and oak.
 Undergrowth oak and juniper brush.

SURVEY

- 40.00 N 89°54'E. on a random line bet. secs. 15 and 22.
- 79.86 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect N. and S. line 3 lks. N. of the cor. of secs. 14, 15, 22, and 23
- Thence
 S 89°55'W., on true line, bet. secs. 15 and 22.
- Ascend 190 ft. over NE. slope of spur, over stony mountainous land through oak brush undergrowth

Independent Resurvey of Part and
Survey of Part (Completion) of the Subdivision of T 15 N., R 4 W

Chains
 7.36 Top of spur bears SE. Continue ascent over SW. slope
 12.86 Top of high ridge bears NE. and SW.; Descend 130 ft. over SW. slope.
 21.36 Ravine 10 lks. wide, course NW.; Ascend 90 ft. over NE. Slope
 29.86 Top of short spur, bears NW.; Desc. 180 ft. over SW. slope.
 39.93 Set an iron post 3 ft. long, 1 in. in diam. over cross (x) on exposed bedrock supported by a mound of stone for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S 15
 S 22

1924

41.61 Deposit a marked stone at the base of monument.
 Ravine 5 lks. wide, course NW.; Ascend about 20 ft over NE. slope.
 43.36 Point of spur bears N.; Desc. 40 ft. over W. slope.
 47.36 Dry ravine 8 lks. wide, course SW. thence over SE. slope
 79.86 The reestablished cor. of secs. 15, 16, 21, and 22.
 Land mountainous.
 Soil stony 3rd. and 4th. rate.
 No timber.
 Undergrowth, greasewood and oak brush.

RESURVEY

N 0°02' W., on true line, bet. secs. 15 and 16.
 Ascend 31 ft. over S. slope of spur over stony mountainous land, through scattering oak and juniper timber and brush undergrowth
 1.30 Point of spur bears W. thence over broken W. slope.
 12.80 Descend 34 ft. over NW. slope into canyon.
 17.10 Bottom of canyon.; Cross dry ravine 10 lks. wide, course S20°W.; Ascend 23 ft. over SE. slope.
 22.80 Descend about 10 ft. over NE. slope
 27.50 Ravine 10 lks. wide, course S10°E.
 34.00 Same ravine 10 lks. wide course S10°W.
 39.20 Same ravine 8 lks. wide course SE.; Ascend 24 ft. over SE. slope.
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 6 ins. in the ground to bedrock supported in a mound of stone for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 S16 | S15

1924

from which
 A juniper 6 ins. in diam. bears N43 $\frac{1}{2}$ °E. 93 lks. dist., marked $\frac{1}{4}$ S 15 BT.
 A juniper 16 ins. in diam. bears N42 $\frac{3}{4}$ °W. 124 lks. dist., marked $\frac{1}{4}$ S 16 BT.

Note; From this point the orig $\frac{1}{4}$ sec. cor. of secs. 15 and 16, heretofore described, bears N43°25'E. 13.33 chs. dist. This cor being identical with cor. No. 3 of Tract No. 41 of this Tp. I do not destroy same.

66.00 Top of ridge bears NE. and SW.; Descend gradually over N. slope.

Independent Resurvey of Part and Survey of Part (Completion) of the subdivision of T 15 N., R 4 W.

Chains.

80.00 Set an iron post 3 ft. long, 2-ins. in diam. 27 ins. in the ground for reestablished cor. of secs. 9, 10, 15, and 16, marked on brass cap

T15N	R4W
S9	S10
S16	S15

1924

from which

- A juniper 22 ins. in diam. bears N59½°E. 205 lks. dist., marked T15N., R4W., S 10 BT.
- A juniper 42 ins. in diam. bears S52½°E. 255 lks. dist., marked T15N., R4W., S 15 BT.
- A juniper 30 ins. in diam. bears S22°W. 407 lks. dist., marked T15N., R4W., S 16 BT.
- An oak 12 ins. in diam. bears N89½°W. 145 lks. dist., marked T15N., R4W., S 9 BT.

Note; From this point the orig. cor. of secs. 9, 10, 15, and 16, hereinbefore described, bears N40°40'E. 15.07 chs. dist. This cor. being identical with cor. No. 2 of Tract No. 41 I do not destroy same.

Land mountainous.
Soil stony 2nd. and 3rd. rate.
Timber juniper and oak.
Undergrowth, oak brush.

RESURVEY

40.00 N 89°55'E. on a random line bet. secs. 10 and 15.
Set temp. ¼ sec. cor.
79.82 Intersect N. and S. line at the reestablished cor. of secs. 10, 11, 14, and 15.

Thence
S. 89°55'W., on true line, bet. secs. 10 and 15.
Ascend E. slope over hilly land, through scattering oak and juniper timber and brush undergrowth.

15.80 Top of low ridge bears N. and SW.; Descend 40 ft. over W. slope.
25.02 Ravine 10 lks. wide, course NW.; Asc. 40 ft. over NE. slope.
31.15 Top of low spur bears N.; Desc. 20 ft. over W. slope.
31:23 Intersect E. bdy. of Tract No. 41, 12.43 chs. S 0°58'W. of cor. No. 1 of said tract.
39.91 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for reestablished ¼ sec. cor., marked on brass cap

1	S 10
4	S 15

1924

from which

- A juniper 18 ins. in diam. bears N33½°E. 289 lks. dist., marked ¼ S 10 BT.
- A juniper 16 ins. in diam. bears S37°E. 85 lks. dist., marked ¼ S 15 BT.


Independent Resurvey of Part and
 Survey of Part (completion) of the subdivision of T 15 N., R 4 W.

Chains

- 41.52 Dry ravine 20 lks. wide, course N30°E.
 47.12 Dry ravine 15 lks. wide, course N40°E.; Ascend 63 ft. over SE. slope.
 66.62 Top of spur bears NW.; Desc. 23 ft. over SW. slope.
 70.19 Intersect W. bdy. of Tract No. 41, 11.42 chs. S 0°58' W. of cor. No. 2 of said tract.
 79.82 The reestablished cor. of secs. 9, 10, 15, and 16.
 Land hilly.
 Soil stony 3 rd. rate.
 Timber, scattering juniper and oak.
 Undergrowth oak and juniper brush.


RESURVEY

- N 0°02' W. on true line, bet. secs. 9 and 10.
 Over stony hilly land, through scattering oak and juniper timber and brush undergrowth
 15.00 Ascend 23 ft. over SW. slope to
 20.00 Descend 40 ft. over NW. slope
 31.50 Sand wash 25 lks. wide, course NE. Ascend 88 ft. over SE. slope to 62.00
 40.00 Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base, 10 ins. in the ground to bedrock, supported in a mound of stone for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap



Note: From this point the orig. $\frac{1}{4}$ sec. cor. of secs. 9 and 10, which is a limestone 12 $\frac{1}{2}$ X 7 ins., marked $\frac{1}{4}$ on W. face bears N34°03'E. 14.81 chs. dist.
 Since no areas are dependent upon or claims of any kind tied to this cor.; Destroy all evidence of same.

- 51.00 Top of spur bears N20°E. thence over NW. slope
 62.10 Descend 52 ft. to
 67.10 Ascend 38 ft. to
 71.50 Descend 73 ft. to
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 20 ins. in the ground to bedrock, supported in a mound of stone for reestablished cor. of secs. 3, 4, 9, and 10, marked on brass cap



No trees suitable for bearing trees within limits.; Raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high W. of cor.

Note; From this point the orig. cor. of secs. 3, 4, 9, and 10 hereinbefore described bears N28°25'E. 15.00 chs. dist. This cor. being identical with cor. No. 8 of Tract No. 38 of this township do not destroy same.

Land hilly.
 Soil stony 2nd. and 3rd. rate.


Independent Resurvey of Part and Survey of Part (completion) of the Subdivision of T 15 N., R 4 T.

Chains

Timber scattering juniper and oak.
Undergrowth oak and juniper brush.

RESURVEY

- 40.00 N 89°55'E. on a random line bet. secs. 3 and 10
- 79.82 Set temp. $\frac{1}{4}$ sec. cor.
- Intersect N. and S. line 12 lks. N. of the reestablished cor. of secs. 2, 3, 10, and 11.
- Thence
- West, on true line, bet. secs. 3 and 10.
- Ascend NE. slope of spur over stony mountainous land, through scattering oak and juniper timber and dense oak and juniper brush undergrowth.
- 28.82 Top of spur 50 ft. above cor. bears SE.; Desc. 46 ft. over SW. slope.
- 39.91 Set an iron post 3 ft. long, 1 in. in diam. over cross (X) on exposed bedrock, supported in a mound of stone for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap



1924


No trees within limits.; Deposit marked stone at base of post.

Note; Diligent search in this vicinity fails to reveal any trace of the orig. $\frac{1}{4}$ sec. cor. of secs. 3 and 10.

- 45.52 Sand wash 30 lks. wide 2 ft. deep, course N.; Ascend 55 ft. over E. slope.
- 50.32 Top of spur bears N.; Descend 50 ft. over W. slope.
- 55.72 Sand wash 30 lks. wide 2 $\frac{1}{2}$ ft. deep, course N20°E.; Ascend 52 ft. over NE. slope.
- 79.82 The reestablished cor. of secs. 3, 4, 9, and 10.
- Land rolling mountains.
- Soil stony 2nd. and 3rd. rate.
- Timber scattering juniper and oak.
- Undergrowth oak and juniper brush.

RESURVEY

- 40.00 N 0°02' W. on a random line bet. secs. 3 and 4.
- 80.10 Set temp. $\frac{1}{4}$ sec. cor.
- Intersect E. and W. line 14 lks. E. of the cor. of secs. 3, 4, 33, and 34, on N. bdy. of Tp. herein before described.
- Thence
- S. 0° 8' E., on true line, bet. secs. 3 and 4.
- Over rolling sandy land in fenced field.
- 5.10 Wire fence bears E. and W.
- 15.80 Gulch 15 lks. wide, 3 ft. deep, course NW.
- 18.80 Wire fence bears E. and W.
- 19.60 Gulch 15 lks. wide 5 ft. deep, course W.
- 25.10 Gulch 10 lks. wide 3 ft. deep, course NW.
- 40.10 Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base, 27 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap



1924

Chains

Note; From this point the orig. $\frac{1}{4}$ sec. cor. of secs. 3 and 4, hereinbefore described bears N22°11'E. 15.79 chs. dist.

This cor. being identical with cor. No. 7 of Tract No. 38 of this Tp.; Do not destroy same.

55.10 Enter oak and juniper timber and brush undergrowth., bears NE. and SW.

75.00 Leave rolling land bears E. and W.; Enter hilly land.; Ascend 29 ft. over N. slope to.

80.10 The reestablished cor. of secs. 3, 4, 9, and 10.

Land level, rolling, and hilly.

Soil sandy and stone 1st. 2nd, and 3rd. rate.

Timber scattering juniper and oak.

Undergrowth oak and juniper brush.

SURVEY

From the reestablished cor. of secs. 32 and 33 on S. bdy. of Tp. hereinbefore described.

N 0°02' W. bet. secs. 32 and 33.

Ascend SE. slope 210 ft. over stony mountainous land through scattering greasewood brush undergrowth

31.42 Top of spur, bears W.; Descend 35 ft. over N. slope

35.22 Ravine course SW.; Ascend 90 ft. over SE. slope.

39.22 (40.00 chs. S0°02'E. of intersection with Sectional Correction Line)

Set an iron post 3 ft. long, 1 in. in diam. overcross (X) on exposed bedrock, supported in a mound of stone for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$
s32 | s33

1924

50.72 Deposit a marked stone at base of post.
Top of ridge bears NW. and SE.; Descend 180 ft. over NE. slope

70.22 Dry ravine 10 lks. wide, course N70°E.; Ascend 80 ft. over SE. slope.

75.72 Top of short spur bears E.; Descend 30 ft. over N. slope.

79.22 Intersect Sectional Correction Line 8 lks. E. of the temp. cor. of secs. 28, 29, 32, and 33.; At point of intersection

Set an iron post 3 ft. long, 2 ins. in diam. 6 ins. in the ground to bedrock, supported in a mound of stone for cor. of secs. 28, 29, 32, and 33, marked on brass cap

T15N | R4W
s29 | s28
s32 | s33

1924

from which

A juniper 10 ins. in diam. bears N86°E 326 lks. dist., marked T15N., R4W., S 28 BT.

A juniper 6 ins. in diam. bears S76°E. 240 lks. dist., marked T15N., R4 W. S 33 BT.

Independent Resurvey of Part and
Survey of Part (Completion) of the subdivision of T 15 N., R 4 W.

Chains

A juniper 8 ins. in diam. bears S41 $\frac{1}{2}$ °W. 36 lks. dist.,
marked T15N., R4W., S 32 BT.
No other trees available.; Deposit a marked stone at the
base of post.
Land mountainous.
Soil stony 3rd. and 4th. rate.
Timber, scattering juniper and oak.
Undergrowth oak brush.

SURVEY

From the reestablished cor. of secs. 27, 28, 33, and 34
West, on true line, on Sectional Correction Line, bet. secs.
28 and 33.
Descend 23 ft. over NW. slope over hilly land, through
scattering oak timber and brush undergrowth.
2.00 Foot of descent.; Leave hilly land timber and brush, bears
NE. and SW.; Enter level sandy valley.
6.00 Dry sand wash 80 lks. wide 1 $\frac{1}{2}$ ft. deep, course SW.
22.50 Enter oak and juniper timber and brush undergrowth, bears
N. and S.
25.50 Junction of roads from Tonto Springs Forest Service
Ranger Station to the Skull Valley- Prescott road
and to Draper's ranch bears NE. and S. and NW.
and S. respectively.
27.50 Sand wash 30 lks. wide 1 ft. deep, course S20°E.
34.20 Sand wash 40 lks. wide 2 ft. deep, course SE. Leave level
valley land, bears NW. and S.; Ascend 40 ft. over
E. slope over stony mountainous land.
39.99 Set an iron post 3 ft. long, 1 in. in diam. 22 ins. in the
ground to bedrock, supported in a mound of stone
for $\frac{1}{4}$ sec. cor., marked on brass cap

S 28
 $\frac{1}{4}$ —————
S 33

1924

from which
An Oak 6 ins. in diam. bears N84 $\frac{3}{4}$ °E. 148 lks. dist.,
marked $\frac{1}{4}$ S 28 BT.
A juniper 10 ins. in diam. bears S79 $\frac{3}{4}$ °W. 131 lks. dist.,
marked $\frac{1}{4}$ S 33 BT.
47.00 Top of spur, bears SE.; Descend 58 ft. over SW. slope.
58.70 Bottom of canyon, cross ravine 8 lks. wide, course SE.;
Ascend 63 ft. over NE. slope to
79.98 The cor. of secs. 28, 29, 32, and 33.
Land level, hilly, and mountainous.
Soil sandy and stony 1st., 2nd., and 3rd. rate.
Timber oak and juniper.
Undergrowth oak brush.


SURVEY

N 0°02'W. bet. secs. 28 and 29.
Ascend 52 ft. over stony mountainous land, through
scattering juniper and oak timber and brush
undergrowth.
21.75 Top of spur bears SW.; Descend NW. slope 75 ft.
30.50 Sand wash 20 lks. wide, course NE.; Ascend 70 ft. over SE.
slope.
40.00 Set an iron post 3 ft. long, 1 in. in diam. with marked
stone at the base, 10 ins. in the ground to bedrock


Independent Resurvey of Part and Survey of Part (Completion) of the Subdivision of T.15 N., R 4 W.

Chains

supported in a mound of stone for 1/4 sec. cor., marked on brass cap




43.00 Top of spur bears E.; Desc. 60 ft. over N. slope.
 55.50 Ravine 5 lks. wide, course E.; Ascend 31 ft. over S. slope.
 62.00 Top of spur bears SE.; thence over rolling land slopes NE.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 20 ins. in the ground to bedrock, supported in a mound of stone for cor. of secs. 20, 21, 28, and 29, marked on brass cap



No trees suitable for bearing trees within limits.; Deposit a marked stone at base of post.
 Land rolling and mountainous.
 Soil stony 2nd. and 3rd. rate.
 Timber scattering juniper and oak.
 Undergrowth, oak brush.

SURVEY

40.00 East on a random line bet. secs. 21 and 28.
 79.94 Set temp. 1/4 sec. cor.
 Intersect N. and S. line 5 lks. S. of the reestablished cor. of secs. 21, 22, 27, and 28.
 Thence
 S. 89° 58' W. on true line bet. secs. 21 and 28.
 Descend W. slope 34 ft. over stony mountainous land, thru. scattering oak timber and brush undergrowth
 .68 Intersect E. bdy. of H.E.S. No. 341 3.39 chs. S 2° 57' W. of cor. No. 1 of said claim.
 3.34 Wire fence bears NW. and SE.
 5.00 Foot of descent; Leave mountainous land bears N. and S. Enter rolling bottom land.
 7.84 Ranch road bears N15° E. and S15° W.
 7.95 Wire fence along roadway, bears NE. and SW.
 11.94 Sand wash 50 lks. wide, course S.; Leave rolling bottom land, bears N. and S.; Ascend 22 ft. over E. slope over stony hilly land to
 20.05 Top of hill bears N. and S.; Desc. 22 ft. to
 21.00 Foot of descent, thence over rolling land.
 * 35.15 Ascend 44 ft. over NE. slope.
 39.97 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for 1/4 sec. cor. marked on brass cap



* 24.02 No trees suitable for bearing trees within limits.
 Intersect W. bdy. H.E.S. No. 341, S. 7° 6' W., 14.48 chs. from Cor. 6.


Independent Resurvey of Part and Survey of Part (Completion) of the Subdivision of T 15 N., R 4 W.

Chains


Raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high N. of cor.
 Note; This cor. is situated on top of spur bears S.; Desc.
 46 ft. over W. slope to
 45.34 Ascend 23 ft. over SE. slope to
 65.34 Descend 42 ft. over SW. slope
 68.64 Road from the Tonto Springs Ranger Station to Clinton H
 Draper's ranch, bears NW. and SE.
 70.20 Ravine course SE. Ascend about 15 ft. over NE. slope to
 79.94 The cor. of secs. 20, 21, 28, and 29.
 Land rolling, hilly, and mountainous.
 Soil stony 2nd. and 3rd. rate.
 Timber scattering juniper and cedar.
 Undergrowth oak brush.

SURVEY

N $0^{\circ}02'W$. bet. secs. 20 and 21
 Over rolling stony NE. slope, through scattering oak and
 juniper timber and dense oak brush undergrowth.
 4.00 Road from the Tonto Springs Ranger Station to Clinton H
 Draper's ranch bears NW. and SE.
 17.00 Sand wash 15 lks. wide 2 ft. deep, course SE.; Ascend. 550
 ft. over SW. slope of mountain ridge.
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the
 ground for $\frac{1}{4}$ sec. cor., marked on brass cap



No trees suitable for bearing trees available.
 Raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high W. of cor.
 44.50 Ravine 10 lks. wide 15 ft. deep, course SW. thence Asc.
 SE. slope to
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. with marked
 stone at the base, 20 ins. in the ground to bedrock
 supported in a mound of stone for cor. of secs.
 16, 17, 20, and 21, marked on brass cap




No trees within limits.
 Land rolling and mountainous.
 Soil stony 2nd. and 3rd. rate.
 Timber, scattering oak and juniper.
 Undergrowth oak brush.

SURVEY

40.00 N $89^{\circ}58'E$. on a random line bet. secs. 16 and 21
 Set temp. $\frac{1}{4}$ sec. cor.

Chains

79.98 Intersect N. and S. line 5 lks. N. of the reestablished cor. of secs. 15, 16, 21, and 22.
 Thence West, on true line, bet. secs. 16 and 21.
 Descend 80 ft. over SW. slope over stony mountainous land, through scattering juniper timber and oak brush undergrowth.
 6.48 Bottom of canyon.; Cross ravine 15 lks. wide, course S.; Ascend 230 ft. over E. slope of spur.
 39.99 Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base, 20 ins. in the ground to bedrock, supported in a mound of stone for $\frac{1}{4}$ sec. cor. marked on brass cap




1924

No trees within limits.
 46.50 Top of spur bears SE., thence over S. slope
 57.98 Top of spur bears S.; Desc. 220 ft. over W. slope.
 71.28 Ravine 8 lks. wide, course S.; Ascend 150 ft. over NE. slope
 77.48 Top of spur bears SE.; Descend 15 ft. over SW. slope to
 79.98 The cor. of secs. 16, 17, 20, and 21.
 Land mountainous.
 Soil stony 3 rd. rate.
 Timber, scattering oak and juniper.
 Undergrowth oak brush.


SURVEY

N 0°02' W. bet. secs. 16 and 17.
 Ascend 177 ft. over S. slope over stony mountainous land, through dense oak brush undergrowth.
 3.50 Top of spur bears SE.; Continue ascent over SE. slope of ridge.
 8.00 Top of ridge bears E. and W.; Descend 260 ft. over NE. slope.
 40.00 Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base, 10 ins. in the ground to bedrock, supported in a mound of stone for $\frac{1}{4}$ sec. cor., marked on brass cap



1924

67.75 Rocky ravine 20 lks. wide, course NE.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the ground for cor. of secs. 8, 9, 16, and 17., marked on brass cap



1924

Independent Resurvey of Part and Survey of Part (Completion) of the Subdivision of T15 N., R 4 W.

Chains

from which
 A juniper 18 ins. in diam. bears S48°W. 134 lks. dist.,
 marked T15N., R4W., S 17 BT.
 No other trees within limits.
 Raise a mound of stone 2 ft. base, 1½ ft. high W. of cor.
 Land mountainous.
 Soil stony 3rd. and 4th. rate.
 Timber, scattering juniper.
 Undergrowth, oak brush.

SURVEY

Easton a random line bet. secs. 9 and 16.
 40.00 Set temp. ¼ sec. cor.
 80.00 Intersect N. and S. line at the reestablished cor. of secs.
 9, 10, 15, and 16.
 Thence
 West, on true line, bet. secs. 9 and 16.
 Over stony hilly land, through scattering oak and juniper
 timber and brush undergrowth.
 .05 Wash course N.; Ascend 121 ft. over NE. slope
 10.00 Sand wash 15 lks. wide 3 ft. deep, course N60°E.
 30.00 Top of ridge bears NE. and SW.; Desc. 54 ft. over W. slope.
 40.00 Set an iron post 3 ft. long, 1 in. in diam. with marked
 stone at the base, 16 ins. in the ground to
 bedrock, supported in a mound of stone for ¼
 sec. cor., marked on brass cap

¼ S 9
 S 16

1924

No trees suitable for bearing trees available.

47.00 Sand wash 20 lks. wide, course N20°E.; Ascend 52 ft. over SE.
 slope.
 65.00 Top of spur bears NE.; Descend 56 ft. over NW. slope
 78.00 Sand wash 20 lks. wide, course N20°E.; Asc. about 15 ft. to
 80.00 The cor. of secs. 8, 9, 16, and 17.
 Land hilly.
 Soil stony 3 rd. rate.
 Timber scattering oak and juniper.
 Undergrowth, oak and juniper brush.

SURVEY

N 0°02' W., bet. secs. 8 and 9.
 Descend 40 ft. over NE. slope through oak brush undergro-
 wth
 16.20 Sand wash 10 lks. wide, course NE.
 24.00 Sand wash 20 lks. wide 2 ft. deep, course NE.; ascend
 34 ft. over SE. slope.
 36.30 Top of spur bears NE.; Descend 115 ft. over NW. slope
 40.00 Set an iron post 3 ft. long, 1 in. in diam. with marked
 stone at the base, 20 ins. in the ground to
 bedrock, supported in a mound of stone for ¼ sec.
 cor. marked on brass cap

¼
 S 8 | S 9

1924

Chains

80.00

Set an iron post 3 ft. long, 2 ins. in diam. with marked stone at the base, 4 ins. in the ground to bedrock, supported in a mound of stone for reestablished cor. of secs. 4, 5, 8, and 9., marked on brass cap

T15N.	R4W
S5	S4
S 8	S9

1924

Land hilly and broken.
Soil stony 2nd. and 3rd. rate.
No timber.
Undergrowth, oak brush.
Diligent search in this vicinity fails to reveal any trace of the orig. cor. of secs. 4, 5, 8, and 9.

RESURVEY

40.00

East on a random line bet. secs. 4 and 9.

80.08

Set temp. $\frac{1}{4}$ sec. cor.
Intersect. N. and S. line 12 lks. S. of the reestablished cor. of secs. 3, 4, 9, and 10.

Thence

S $89^{\circ}55'W.$, (on true line, bet. secs. 4 and 9.)
Over stony hilly land, through scattering juniper timber and dense oak brush undergrowth.; Descend 40 ft. over NW. slope.

15.08

Sand wash 20 lks. wide, course N.; Ascend 50 ft. to

40.04

Set an iron post 3 ft. long 1 in. in diam. with marked stone at the base 27 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$	S 4
	S 9

1924

No trees suitable for bearing trees within limits.

Note; Diligent search in this vicinity fails to reveal any trace of the orig. $\frac{1}{4}$ sec. cor. of secs. 4 and 9.

48.48

Ridge bears N.; Descend 53 ft. over W. slope.

57.68

Sand wash 20 lks. wide, course N.; Ascend 34 ft. to

75.28

Descend 50 ft. over SW. slope to

80.08

The reestablished cor. of secs. 4, 5, 8, and 9.

Land hilly.

Soil stony 2nd. and 3rd. rate.

Timber scattering oak and juniper t

Undergrowth oak brush.

RESURVEY

40.00

N $0^{\circ}08'W.$ on a random line bet. secs. 4 and 5.

80.24

Set temp. $\frac{1}{4}$ sec. cor.

Intersect E. and W. line 21 lks. E. of the cor. of secs.

4, 5, 32, and 33, on N. bdy. of Tp. hereinbefore descri-
bed.

Thence


S $0^{\circ}17'E.$, on true line, bet. secs. 4 and 5.

Independent Resurvey of Part and
 Survey of Part (Completion) of the Subdivision of T 15 N., R 4 W.

87

Chains

- Descend 57 ft over SE. slope through oak and juniper timber and brush undergrowth over hilly land.
 12.24 Sand wash 20 lks. wide 3 ft. deep, course N70°E.; Ascend 106 ft. over NW. slope.
 40.24 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap



1924


No trees suitable for bearing trees available.; Deposit a marked stone at base of post.

Note; Diligent search in this vicinity fails to reveal any trace of the orig. $\frac{1}{4}$ sec. cor. of secs. 4 and 5.

- 60.25 Top of spur bears SE.; Descend 110 ft. over SW. slope.
 73.74 Sand wash 80 lks. wide, Stream clear water 3 ft. wide 2 ins. deep course N70°E.
 Road from Redmond Toohy's to Clinton H Draper's ranch in bottom of wash, bears N70°E. and S70°W.
 79.74 Ravine 8 lks. wide, course N20°E.
 80.24 The reestablished cor. of secs. 4, 5, 8, and 9.
 Land hilly.
 Soil stony 3rd. and 4th. rate.
 Timber oak and juniper timber.
 Undergrowth oak brush.

SURVEY

- From the reestablished cor. of secs. 31 and 32 on S. bdy. of Tp. hereinbefore described,
 N 0°03'W., bet. secs. 31 and 32.
 Descend about 20 ft. over NW. slope over stony mountainous land, through oak brush undergrowth.
 4.34 Ravine 4 lks. wide course SW.; Ascend 114 ft. over SE. slope to
 27.25 Descend 38 ft. over NW. slope.
 37.09 Ravine 4 lks. wide, course SW.; Ascend 41 ft. over SE. slope.
 39.84 (40.00 chs. S0°03'E. from intersection with sectional Correction Line) 1 in. in dia.
 Set an iron post 3 ft. long, over cross (x) on exposed bedrock, supported in a mound of stone with marked stone at the base for $\frac{1}{4}$ sec. cor., marked on brass cap



1924

- 50.00 Top of spur bears SW.; Descend 29 ft. over NW. slope
 60.34 Ravine 6 lks. wide, course SW.; Ascend 170 ft. over SE. slope.
 79.15 Top of ridge bears NW. and SE.; Descend about 18 ft. to
 79.84 Intersect Sectional Correction Line 2 lks. W. of temp. cor. of secs. 29, 30, 31, and 32.; At point of intersection

Chains

Set an iron post 3 ft. long, 2 ins. in diam. with marked stone at the base 12 ins. in the ground to bedrock supported in a mound of stone, for cor. of secs. 29, 30, 31, and 32., marked on brass cap

T15N	R4W
S30	S29
S31	S32

1924

from which

A juniper 10 ins. in diam. bears S76 $\frac{1}{2}$ °W. 188 lks. dist. marked T15N., R4W S32 BT.

A juniper 16 ins. in diam. bears N55°W. 105 lks. dist., marked T15N., R4W. S 30 BT.

No other trees suitable for bearing trees available.

Land mountainous.

Soil stony 3rd. rate.

Timber scattering juniper and oak.

Undergrowth oak brush.

SURVEY

From the cor. of secs. 28, 29, 32, and 33

West, (on true line, on Sectional Correction line, bet. secs. 29 and 32.

Ascend 150 ft. over NE. slope over stony mountainous land through scattering juniper timber and oak brush undergrowth.

22.50 Top of spur, bears NE. Descend 58 ft. over NW. slope.

35.70 Ravine 20 lks. wide, course N20°E.; Ascend 33 ft. over SE. slope.

40.05 Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base 4 ins. in the ground to bedrock, supported in a mound of stone for $\frac{1}{4}$ sec. cor., marked on brass cap

S 29
S 32

1924

41.00 Top of spur bears N.; Descend 40 ft. over W. slope.

45.00 Ravine 5 lks. wide, course N.; Ascend 85 ft. over NE. slope

79.60 Top of ridge bears N. and SE. Descend over NW. slope .

89.10 The cor. of secs. 29, 30, 31, and 32.

Land mountainous.

Soil stony 3rd. rate.

Timber scattering oak and juniper.

Undergrowth oak brush.

SURVEY

West, (on true line, on Sectional Correction Line, bet. secs. 30 and 31.

Descend over NW. slope 34 ft. to

5.00 Ascend 53 ft. over NE. slope.

15.00 Top of ridge bears NW. and SE.; Descend 155 ft. over SW. slope

Independent Resurvey of Part and Survey of Part. Completion of the Subdivision lines of T.15 N., R.4 W. 89

Chains
 38.50 Ravine 10 lks. wide, course S20°W.; Ascend 15 ft. over SE. slope.
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for 1/4 sec. cor., marked on brass cap

S 30
 S 31
 1924

47.50 Raise a mound of stone 2 ft. base, 1 1/2 ft. high N. of cor.
 Top of spur bears NW. and SE.; Descend 90 ft. over W. slope.
 71.00 Ravine 15 lks. wide, course SW.; Ascend 70 ft. over SE. slope.
 75.90 Intersect the W. bdy. of Tp. at the reestablished cor. of secs. 30 and 31., T15N., R4W. hereinbefore described.

Land mountainous.
 Soil stony, 3rd. and 4th. rate.
 Timber, none.
 Undergrowth, oak brush.

SURVEY

N 0°03'W. (on true line), bet. secs. 29 and 30.
 Descend 115 ft. over N. slope of ridge over stony mountains land, through dense oak brush undergrowth.

23.80 Ravine 10 lks. wide, 2 ft. deep, course NW.; Ascend 23 ft. over SW. slope.
 35.00 Top of spur, bears NW.; Descend 29 ft. over NE. slope
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for 1/4 sec. cor., marked on brass cap

S 30 | S 29
 1924

from which,
 A juniper 10 ins. in diam. bears N61°E. 220 lks. dist., marked S 29 BT.
 A juniper 5 ins. in diam. bears S61°W. 133 lks. dist., marked S 30 BT.

43.00 Ravine 10 lks. wide, course N70°W. thence over SW. slope.
 64.00 Leave dense oak brush undergrowth, bears E. and W.; Enter level land, bears E. and W.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. with marked stone at the base, 27 ins. in the ground for reestablished cor. of secs. 19, 20, 29, and 30, marked on brass cap

T15N	R4W
S19	S20
S30	S29

1924

from which,
 A juniper 10 ins. in diam. bears N10 1/2°E. 374 lks. dist., marked T15N., R4W., S 20 BT.
 A juniper 36 ins. in diam. bears N 8°W. 329 lks. dist., marked T15N., R4W., S 19 BT.

Chains

Note; From this point the identified orig.cor.of secs. 19, 20, 29; and 30., which is a granite stone 16X12X8 ins. above ground, firmly set, marked with 5 notches on E. and 2 notches on S. edges and witnessed by two bearing trees, one each NE. and NW., bears S46°06'E. 4.74 chs. dist. Since no claims of any description have been tied to this cor.; Destroy all evidence of same and obliterate marks on the bearing trees.

From this point, cor. No. 4 of Tract No. 42, bears N45°05'W. 23.74 chs. dist.


Land rolling, level, and mountainous.
Soil stony 2nd. and 3rd. rate.
Timber, scattering oak and juniper.
Undergrowth, oak brush.

SURVEY

40.00 East on a random line bet. secs. 20 and 29.
Set temp. $\frac{1}{4}$ sec. cor.
80,10 Intersect N. and S. line 2 lks. S. of the cor. of secs. 20, 21, 28, and 29.

Thence
S 89°59'W., (on true line), bet. secs. 20 and 29.
Over rolling land, through scattering juniper timber and dense oak brush undergrowth.

40.05 Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base, 27 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap



1924

80,10 No trees suitable for bearing trees within limits.
The reestablished cor. of secs. 19, 20, 29, and 30.

Land rolling.
Soil gravelly loam, 1st. and 2nd. rate.
Timber, scattering juniper.
Undergrowth, oak brush.

RESURVEY

40.00 West on a random line bet. secs. 19 and 30.
Set temp. $\frac{1}{4}$ sec. cor.
75.46 Intersect W. bdy. of Tp. 7 lks. N. of the reestablished cor. of secs. 19 and 30, T15N., R4W., hereinbefore described.


Thence
N 89°57'E. (on true line, bet. secs. 19 and 30).
Ascend 48 ft. over SW. slope through oak and juniper timber and dense oak brush undergrowth, over stony hilly land.

5.36 Top of spur bears S.; Descend 57 ft. over E. slope.
19.16 Road to Clinton H Draper's ranch; bears N20°E. and S20°W.
21.46 Foot of descent in canyon, cross sand wash 50 lks. wide course S.; Ascend 112 ft. over SW. slope over mountainous land.

Independent Resurvey of Part and
Survey of Part (Completion) of the Subdivision of T 15 N., R 4 W.

Chains

35.46 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap



from which,
 A juniper 6 ins. in diam. bears N19°W. 155 lks. dist., marked $\frac{1}{4}$ S 19 BT.
 A juniper 8 ins. in diam. bears S17°W. 110 lks. dist., marked $\frac{1}{4}$ S 30 BT.

Note; From this point the orig. $\frac{1}{4}$ sec. cor. of secs. 19 and 30, which is a granite stone 12x10x6 ins. above ground, firmly set, marked $\frac{1}{4}$ on N. face and witnessed by two bearing trees, one each NE. and SW. of cor., bears S46°06'E. 4.74 chs. dist. There being no claims of any character tied to this cor.; Destroy all evidence of same and obliterate marks on the bearing trees.

39.46 Top of ridge bears NW. and SE.; Descend 29 ft. over E. slope.

47.46 Leave timber and undergrowth, bears N. and S.

59.46 Gulch 6 lks. wide, 3 ft. deep, course SW.


75.46 The reestablished cor. of secs. 19, 20, 29, and 30.

Land rolling and hilly.
 Soil sandy and stony 2nd. and 3rd. rate.
 Timber, scattering oak and juniper.
 Undergrowth oak and juniper brush.

RESURVEY

19.40 N 0°03'W (on true line) bet. secs. 19 and 20.
 Over rolling sandy land, through scattering juniper timber.
 Road from the Tonto Springs Forest Service Ranger Station to Clinton H. Draper's ranch, bears N85°W. and S85°E.

40.00 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap



from which

A china berry tree 6 ins. in diam. bears N74 $\frac{1}{2}$ °E. 4.97 lks. dist., marked $\frac{1}{4}$ S 20 BT.
 A juniper 6 ins. in diam. bears N16 $\frac{1}{2}$ °E. 7 lks. dist., marked $\frac{1}{4}$ S 20 BT.

Note; From this point, the orig. $\frac{1}{4}$ sec. cor. of secs. 19 and 20, which is a granite stone 8x6x9 ins. above ground firmly set, marked $\frac{1}{4}$ S on W. face and witnessed by one bearing tree, bears S46°23'E. 4.63 chs. dist. Clinton H. Draper's house bears S75 $\frac{1}{2}$ °W. about 37 chs. dist.

Independent Resurvey of Part and Survey of Part (Completion) of the subdivision of T15 N., R4 W.

Chains

No claims of any character having been tied to this cor. Destroy all evidence of same and obliterate marks on the bearing tree.

- 45.00 Enter dense oak brush undergrowth, bears NE. and SW.
- 50.00 Leave rolling land, bears E. and W.; Ascend 28 ft. over SE. slope over hilly land.
- 52.50 Top of ridge bears NE. and SW.; Descend 34 ft. over NW. slope
- 57.50 Foot of descent, in draw 150 lks. wide, course SW.
- 60.10 Ascend 63 ft. over S. slope.
- 79.50 Top of ridge bears NE. and SW.; Descend about 6 ft. over NW. slope to
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. with marked stone at the base, 18 ins. in the ground to bedrock, supported in a mound of stone for reestablished cor. of secs. 17, 18, 19, and 20, marked on brass cap.

T15N	R4W
S18	S17
S19	S20

1924

from which,

A juniper 10 ins. in diam. bears N55 1/2° W. 245 lks. dist., marked T15N., R4W. S 18 BT. No other trees suitable for bearing trees within limit.

Note; From this point the orig. cor. of secs. 17, 18, 19, and 20, which is a granite stone 18x12x8 ins. above ground, firmly set, marked with 5 notches on E. and 3 notches on S. edges with mound of stone 2 ft. base, 1 ft. high W., bears S. 51° 13' E. 4.27 chs. dist.

There being no mineral or other claims of any character connected to this cor.; Destroy all evidence of same.

Land rolling and hilly. Soil sandy and stony 2nd. and 3rd. rate. Timber, scattering juniper. Undergrowth oak brush.

SURVEY

- 40.00 N 89° 59' E. on a random line bet. secs. 17 and 20. Set temp. 1/4 sec. cor.
- 80.06 Intersect N. and S. line 8 lks. S. of the cor. of secs. 16, 17, 20, and 21.
- Thence S 89° 56' W. (on true line), bet. secs. 17 and 20. Descend 409 ft. over SW. slope, over stony mountainous land, through dense oak brush undergrowth.
- 40.03 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for 1/4 sec. cor., marked on brass cap

1/4	S 17
	S 20

1924

- 63.06 Raise a mound of stone 2 ft. base, 1 1/2 ft. high N. of cor. Rocky ravine 10 lks. wide, course S30° W.; Ascend 75 ft. over SE. slope

BOOK 3788

Independent Resurvey of Part and Survey of Part (Completion) of the Subdivision of T 15 N., R 4 W.

Chains

73.08 Top of spur bears SW.; Descend 80 ft. over NW. slope, to
 80.06 The reestablished cor. of secs. 17, 18, 19, and 20
 Land mountainous.
 Soil stony, 3rd. and 4th. rate.
 Timber, none.
 Undergrowth, oak brush.

RESURVEY

40.00 S 89°57'W. on a random line bet. secs. 18 and 19.
 Set temp. $\frac{1}{4}$ sec. cor.
 75.50 Intersect W. bdy. of Tp. 7 lks. S. of the reestablished cor. of
 secs. 18 and 19. T15N., R4W. hereinbefore described.

Thence
 East, on true line, bet. secs. 18 and 19.
 Ascend 40 ft. over SW. slope over hilly land, through
 scattering juniper and oak timber and dense oak
 brush undergrowth.
 5.20 Top of spur bears S.; Descend 15 ft. over E. slope.
 15.20 Ravine. 4 lks. wide 2 $\frac{1}{2}$ ft. deep, course S20°W.; Ascend 29 ft.
 over NW. slope.
 23.50 Top of spur bears S.; Descend 46 ft. over E. slope.
 35.50 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the
 ground for reestablished $\frac{1}{4}$ sec. cor., marked on
 brass cap

$\frac{1}{4}$ S 18
 S 19

1924

from which,

- A juniper 25 ins. in diam. bears N13 $\frac{1}{2}$ °W. 80 lks. dist.,
 marked $\frac{1}{4}$ S 18 BT.
- A juniper 18 ins. in diam. bears S64 $\frac{1}{2}$ °W. 121 lks. dist.,
 marked $\frac{1}{4}$ S 19 BT.

Note; From this point the orig. $\frac{1}{4}$ sec. cor. of secs. 18 and 19
 which is a granite stone 8X8X10 ins. above ground,
 firmly set, marked $\frac{1}{4}$ S on N. face and witnessed by one
 bearing tree, bears S45°46'E. 396 lks. dist.

No mineral or other claims of any character having been
 tied to this cor.; Destroy all evidence of same and
 obliterate marks on the bearing tree.

37.80 Road from Clinton H Draper's ranch to Redmond Toohey's
 ranch, bears N15°E. and S15°W.
 42.00 Sand wash 40 lks. wide, 2 ft. deep, course S.; Ascend 23 ft.
 over NW. slope
 75.50 The reestablished cor. of secs. 17, 18, 19, and 20.

Land rolling hills.
 Soil stony 2nd. and 3rd. rate.
 Timber, scattering juniper and oak.
 Undergrowth, oak brush.

SURVEY


N. 0°03'W., on true line, bet. secs. 17 and 18.
 Descend 20 ft. over NW. slope over stony hilly land,
 through dense oak brush undergrowth.
 2.50 Ravine 5 lks. wide 3 ft. deep, course S80°W.; Ascend 46 ft.
 over SW. slope.

Independent Resurvey of Part and


94 Survey of Part (Completion) of the Subdivision of T 15 N., R 4 W.

Chains

- 10.00 Descend 29 ft.
- 15.00 Foot of descent in draw, course SW²; Ascend 155 ft. over SW slope.
- 35.00 Top of spur, bears W.; Descend 46 ft. over N. slope.
- 39.95 Ravine 8 lks. wide, course SW.; Ascend 62 ft. over SE. slope
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap



- 50.20 Raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high W. of cor.
- Descend 34 ft. over NW. slope.
- 70.30 Sand wash 15 lks. wide, course W.; Ascend 58 ft, over S. slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the ground for cor. of secs. 7, 8, 17, and 18, marked on brass cap



1924

- Raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high W. of cor.
- Land hilly.
- Soil stony, 3rd. rate:
- Timber, none.
- Undergrowth, oak brush.

SURVEY

- 40.00 N 89°56'E. on a random line bet. secs. 8 and 17.
- Set temp. $\frac{1}{4}$ sec. cor.
- 80.22 Intersect N. and S. line 18 lks. N. of the cor. of secs. 8, 9, 16, and 17.
- Thence
- N 89°56'W., on true line, bet. secs. 8 and 17.
- Over NE. slope of ridge over stony hilly land, through dense oak brush undergrowth
- 30.25 Top of ridge, bears NW. and SE.; Descend 178 ft. over SW. slope
- 40.11 Set an iron post 3 ft. long. 1 in. in diam. with marked stone at the base, 27 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

S 8

S 17

1924


- 80.22 The cor. of secs. 7, 8, 17, and 18.
- Land hilly.
- Soil stony 2nd. and 3rd. rate.
- Timber, none.
- Undergrowth, oak and juniper brush.

Independent Resurvey of Part and
Survey of Part (Completion) of the Subdivision of T 15 N., R 4 W.

Chains

SURVEY

West on a random line bet. secs. 7 and 18
 40.000 Set temp $\frac{1}{4}$ sec. cor.
 75.52 Intersect W. bdy. of Tp. 7 lks. N. of reestablished cor. of secs. 7 and 18, T15N., R4W., hereinbefore described.
 Thence
 N89°57'E. on true line, bet. secs. 7 and 18.
 Descend 105 ft. over E. slope, over stony mountainous land, through dense oak brush undergrowth.
 9.12 Ravine 30 lks. wide, course S.; ascend 160 ft. over E. slope.
 18.02 Top of ridge bears NE. and SW. Descend 92 ft. over SE. slope.
 35.52 Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base, 8 ins. in the ground to bedrock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap.




1924

58.02 Road from Redmond Toohy's ranch to Clinton H. Draper's ranch bears NE. and SW.
 59.02 Ravine 20 lks. wide, course SW.; Ascend 127 ft. over NW. slope to
 75.52 The cor. of secs. 7, 8, 17, and 18.
 Land mountainous.
 Soil stony 3 rd. rate.
 No timber.
 Undergrowth, oak and juniper brush.

SURVEY


N 0°3'W. on true line, bet. secs. 7 and 8.
 Ascend 52 ft. over SW. slope over hilly stony land, through scattering oak and juniper timber and brush undergrowth.
 20.00 Descend 52 ft. over NW. slope.
 23.40 Road from Redmond Toohy's ranch to Clinton H. Draper's ranch bears NE. and SW.
 23.80 Ravine 10 lks. wide 3 ft. deep, course SW.; Spring bears NE. about 5.00 chs. dist.; Ascend 40 ft. over SE. slope.
 40.00 Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base, 27 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap.



1924

No trees suitable for bearing trees within limits.

58.00 Top of ridge bears E. and W.; Descend 33 ft. over N. slope
 75.00 Ascend 40 ft. over SE. slope of rocky knoll.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. with marked stone at the base, 20 ins. in the ground to bedrock, supported in a mound of stone for cor. of secs. 5, 6, 7, and 8, marked on brass cap.



1924

Independent Resurvey of Part and Survey of Part (Completion) of the subdivision of T 15 N., R 4 W.

Chains.

Land mountainous.
Soil stony 3 rd. rate.
Timber scattering oak and juniper.
Undergrowth, oak and juniper brush.

SURVEY

- 40.00 S 89°56'E. on a random line bet. secs. 5 and 8.
Set temp $\frac{1}{4}$ sec. cor.
- 80.24 Intersect N. and S. line 10 lks. S. of the reestablished cor. of secs. 4, 5, 8, and 9.
Thence
West, on true line, bet. secs. 5 and 8.
Descend 5 ft. over NW. slope, through dense oak brush undergrowth.
- .10 Rocky ravine 20 lks. wide, course N20°E.; Ascend 34 ft. over NE. slope
- 5.34 Point of spur bears NE.; Desc. 34 ft. over NW. slope.
- 11.74 Sand wash 40 lks. wide, course N70°E.; Brook 5 lks. wide, 3 ins. deep, course NE.
- 12.00 Enter oak and juniper timber bears NE. and SW.
- 13.75 Road from Redmond Toohy's ranch to Clinton H. Draper's ranch bears NE. and SW.
- 25.34 Same sand wash 40 lks. wide,; brook 3 lks. wide, 2 ins. deep course S70°E.; Ascend 115 ft. over SE. slope
- 40.12 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$$\frac{1}{4} \frac{S 5}{S 8}$$

1924

No trees suitable for bearing trees within limits.; Raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high N. of cor.

- 80.24 The cor. of secs. 5, 6, 7, and 8.
Land mountainous.
Soil stony 3 rd. rate.
Timber scattering juniper and oak.
Undergrowth, oak and juniper brush.

SURVEY

- 40.00 S 89°57'W. on a random line bet. secs. 6 and 7.
Set temp $\frac{1}{4}$ sec. cor.
- 75.38 Intersect W. bdy. of Tp. 3 lks. S. of reestablished cor. of Secs. 6 and 7, hereinbefore described and described.
Thence
N 89°58'E. on true line, bet. secs. 6 and 7.
Descend 23 ft. over E. slope, through scattering oak and juniper timber and dense oak brush undergrowth.
- 13.38 Wash 15 lks. wide, course S.; Ascend 52 ft. over SW. slope.
- 26.38 Top of ridge bears NW. and SE.; Descend 104 ft. over NE. slope.
- 35.38 Set an iron post 3 ft. long 1 in. in diam. with marked stone at the base, 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\frac{1}{4} \frac{S 6}{S 7}$$

1924


Independent Resurvey of Part and Survey of Part (Completion) of the Subdivision of T 15 N., R 4 W.

Chains

- 67.78 No trees suitable for bearing trees available. Ravine, 15 lks. wide, 2 ft. deep, course NE.; ascend 23 ft. over NW. slope.
- 75.38 The cor. of secs. 5, 6, 7, and 8.. Land rolling mountains. Soil stony 3 rd. rate. Timber, scattering oak, and juniper. Undergrowth oak and juniper brush.

SURVEY

- 40.00 N 0°17'W. on a random line bet. secs. 5 and 6. Set temp 1/4 sec. cor.
- 80.22 Intersect N. bdy. of Tp. 12 lks. W. of of the cor. of secs. 5, 6, 31, and 32.
- Thence S 0°12'E. on true line, bet. secs. 5 and 6. Descend 259 ft. over SE. slope over stony mountainous land, through scattering oak and juniper timber and dense oak brush undergrowth.
- 40.22 Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base, 27 ins. in the ground, for 1/4 sec. cor., marked on brass cap



1924 .

No trees suitable for bearing trees within limits.

- 60.02 Sand wash 30 lks. wide, course E.; ascend 52 ft.
- 68.52 Sand wash 30 lks. wide, course S70°E.
- 73.72 Sand wash 15 lks. wide, course NE.
- 80.22 The cor. of secs. 5, 6, 7, and 8. Land mountainous. Soil stony 3rd. and 4th. rate. Timber, scattering oak and juniper. Undergrowth oak and juniper brush.

GENERAL DESCRIPTION

This township comprises every variety of land from level valleys to rough mountains and the soil ranges from sandy loam to barren cliffs.

The township is traversed by a high ridge which crosses into the same in sec. 6 and extends in a southeasterly direction as far as sec. 22, thence in a northeasterly direction through the eastern portion of the township., thus dividing the drainage into two parts. The northern portion being drained by numerous ravines and washes which head on the N. slope of this ridge and have a northerly course, discharging their waters into the Simmons Valley to the north.; The southern portion of the township is drained also by numerous ravines and washes which head along the south slope of the above ridge and flow in a southerly and southeasterly direction out of the township

The township is timbered with a scattering growth of oak over the lower levels while pinion and scattering juniper is found over the higher mountainous portion. The township is poorly watered by seep water in the sand wash in sec. 5 and springs in secs. 8 and 22. No mineral of any kind was discovered during the progress of the survey, although evidence of some prospecting having been done was noticed in different places in the rough mountainous portion of the township. There are three settlers residing on the land in the township, one in sec. 14, one in sec. 25, and one in sec. 28 besides the forest ranger in sec. 33.

The continued satisfactory adjustment of the solar apparatus of the transit used in the execution of the resurveys and surveys described in the foregoing notes is indicated from field tests of said transit described in Book "B" of this group.

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Sidney E. Blout, U.S. Cadastral Engineer, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 128 Arizona bearing date of the 11th day of February 1924, ~~XXXX~~, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, ~~surveyed~~ ^{resurveyed} all those parts or portions of the North boundary of Township 14 North, Range 4 West, and the East, West and North bdrs. and Subdivision lines of Township 15 North, Range 4 West; and surveyed all those parts or portions of the South boundary of Fractional Township 15 1/2 North, Range 4 West, Tracts Nos. 37, 38, 39, 40, 41, 42, 43 and 44 of T. 15 N., R. 4 W., and South and East bdrs. and Subdivision lines of Township 15 North, Range 4 West of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in and by diagram on page 2 hereof the foregoing field notes ^{as having been executed by me, and under my direction; and that all the corners of resurvey and} said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 128 Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such ~~resurvey and survey~~.

Place Phoenix Arizona
Date July 25, 1925

Sidney E. Blout
U.S. Cadastral Engineer

APPROVAL.

OFFICE OF THE U. S. SUPERVISOR OF SURVEYS.

Denver, Colo., December 28, 1926

The foregoing field notes of the ~~RESURVEY~~ of Part of the North boundary of Township 14 North, Range 4 West; Part of the East boundary, Part of the Subdivision lines and all of the West and North bdrs. of Township 15 North, Range 4 West; and of the SURVEY of the South bdy of Fractional Township 15 1/2 North, Range 4 West, boundaries of Tracts Nos. 37, 38, 39, 40, 41, 42, 43 and 44 of T. 15 N., R. 4 W., Part (completion) of South bdy, Part (completion) of East bdy, and Part (completion) of the Subdivision lines of Township 15 North, Range 4 West, of the Gila and Salt River Base and Meridian, in the State of Arizona executed by Sidney E. Blout, U.S. Cadastral Engineer.

under his special instructions dated February 11, 1924 for Group 128, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the ~~resurveys~~ ^{and surveys} they describe, are hereby approved.

Quentin Johnson
U. S. Supervisor of Surveys

I certify that the foregoing transcript of the field notes of the above described surveys in _____ has been correctly copied from the original notes on file in this office.