

BOOK 3740

FIELD NOTES

OF THE RESURVEY OF

the 4th Standard Parallel North thru Range 4 West

the South Boundary

East Boundary

West Boundary

North Boundary and

Subdivision Lines of

Township 16 North, Range 4 West

~~Township 15 1/2 North, Range 4 West~~

AND OF THE SURVEY OF

North Boundary of

Fract~~o~~ Township 15 1/2 North, Range 4 West

of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

Sidney E. Blout

U. S. Cadastral Engineer

In the capacity of U. S. Surveyor..., under Special Instructions dated February 11, 1924, issued by the United States Surveyor General to govern surveys included in Group No. 128, Arizona, which were approved by the Commissioner of the General Land Office, March 10, 1924, and Assignment Instructions dated May 1, 1924.

Resurvey and Survey commenced June 25, 1924.

Resurvey and Survey completed August 19, 1924.

3740


3740








Book "C"

Group 128 - Arizona

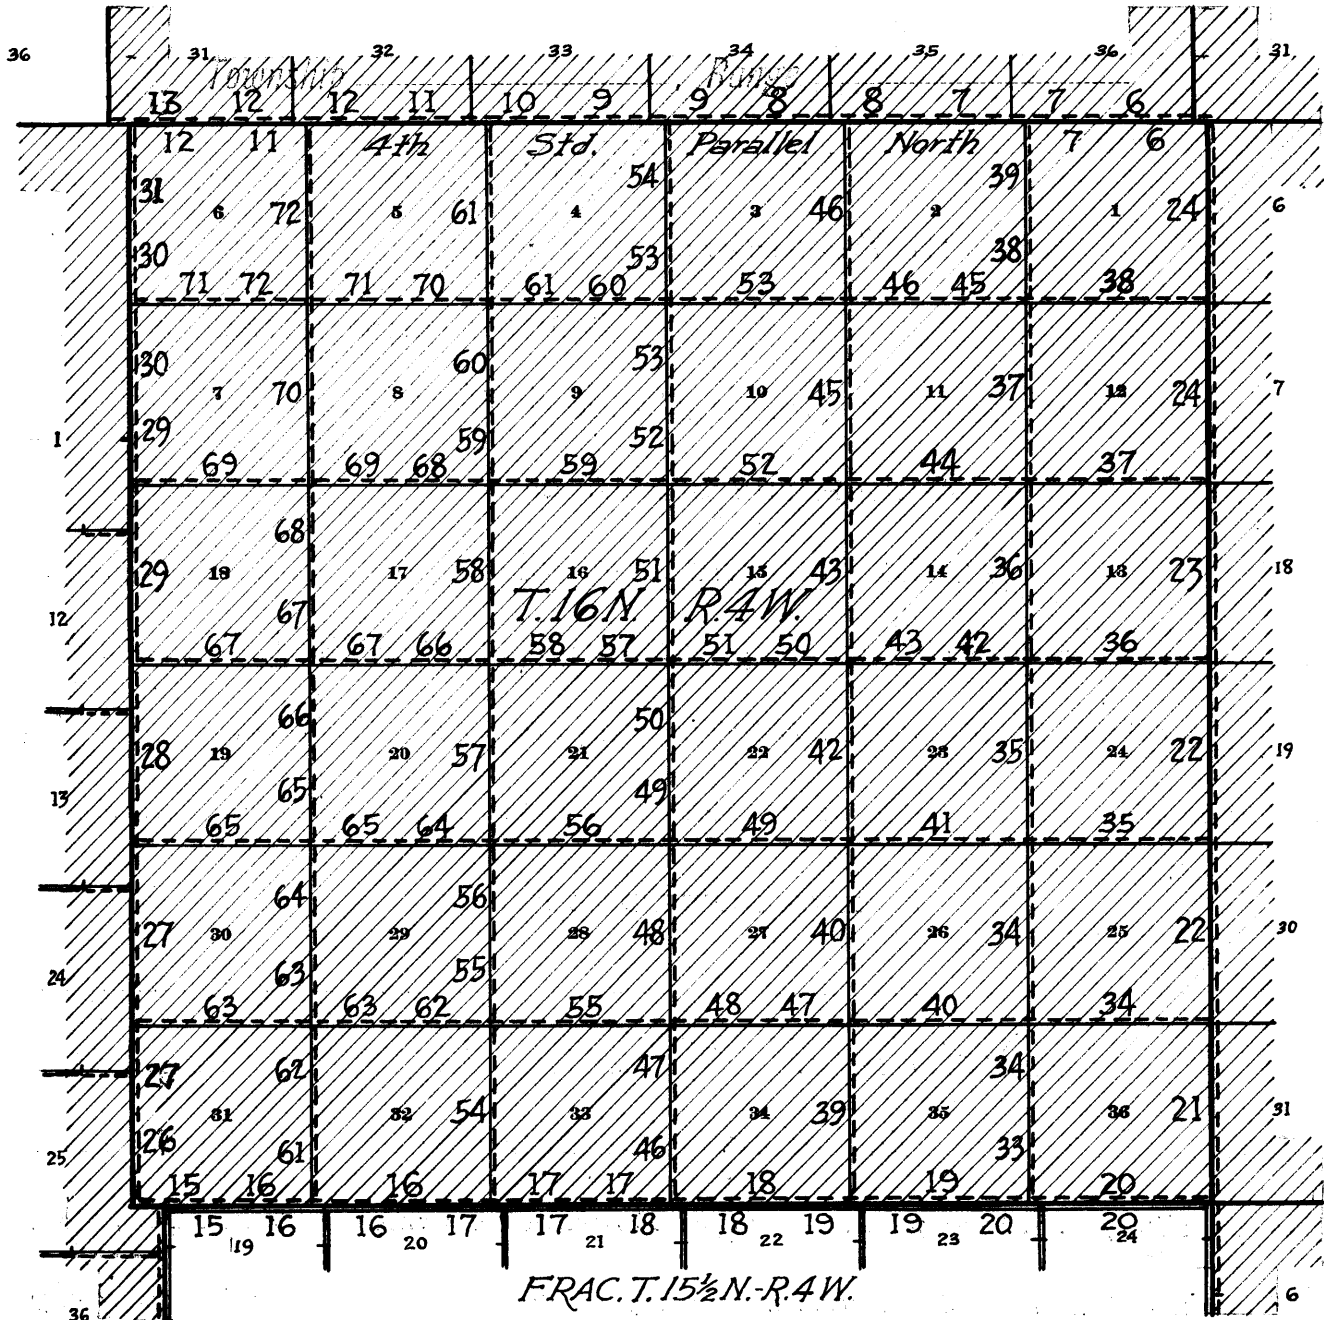BOOK 3740

INDEX DIAGRAM.




- 
 Surveyed with reference to one township. Executed under this group.
- 
 Resurveyed with reference to one township.
- 
 Surveyed under this group.
- 
 Retraced under this group.
- 
 Resurveyed under this group.
- 
 Accepted surveys.
- 
 Areas surveyed as per accepted plats on file.

Book "C"
Group 128 Arizona
DATE DIAGRAM
1924

13

BOOK 3740

T.17 N., R.4 W.

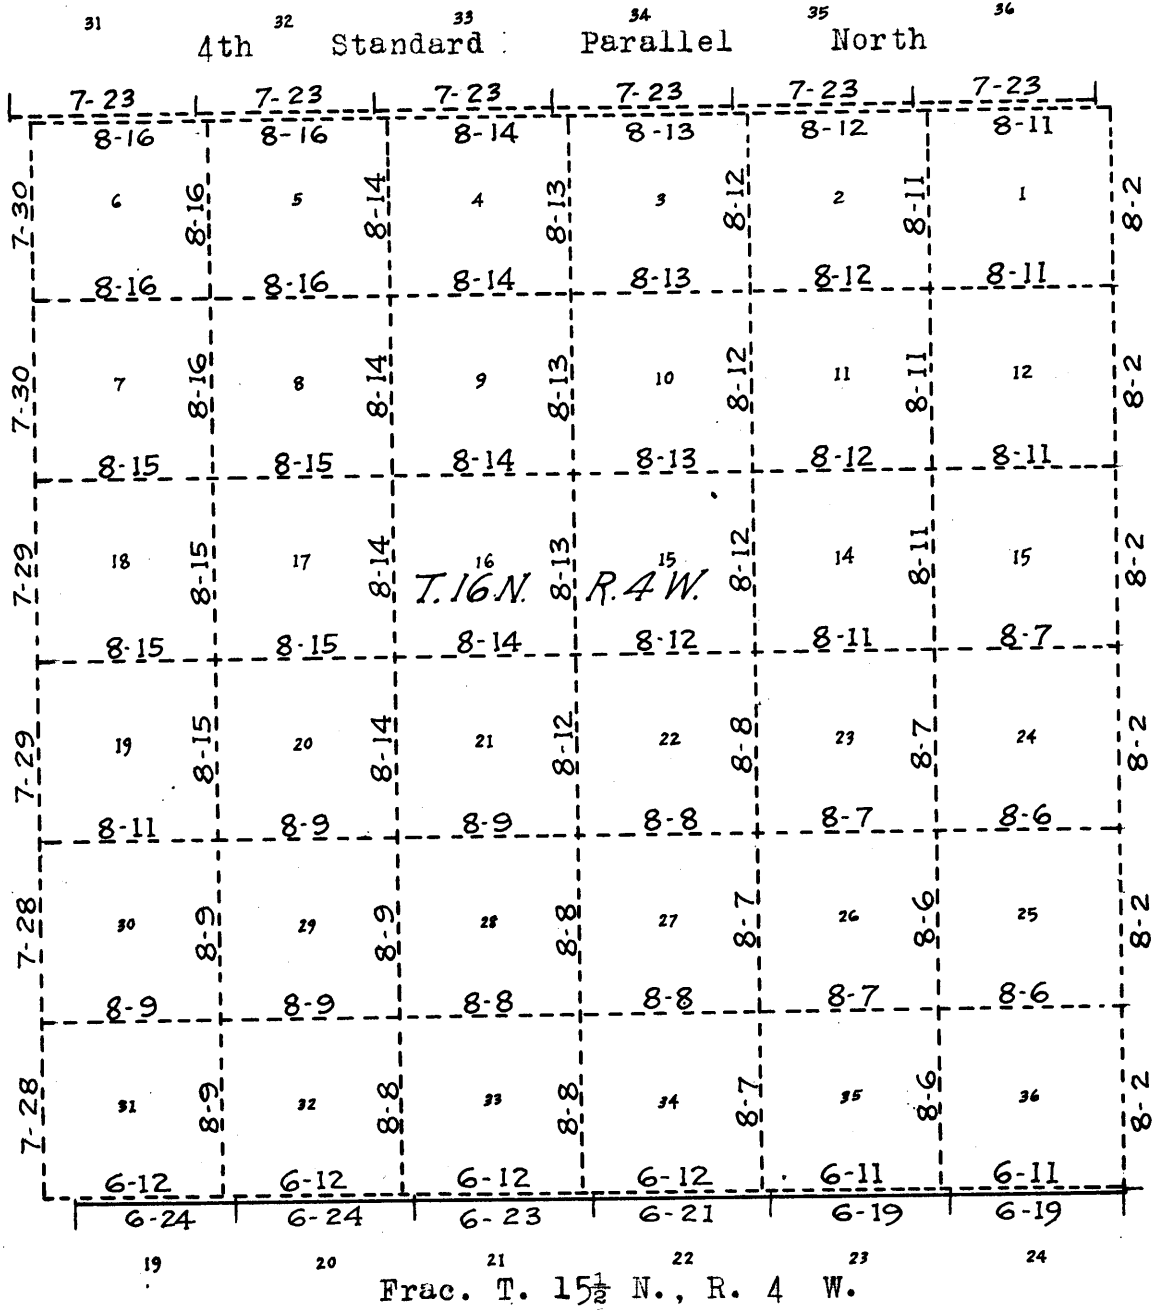

————— Surveyed by Sidney E. Blout, U.S.C.E. on dates shown thereon.

- - - - - Resurveyed by Sidney E. Blout, U.S.C.E. on dates shown thereon.

The resurveys and surveys hereinafter described were executed on dates shown on diagram on page 1 hereof by Sidney E. Blout, U.S. Cadastral Engineer, using Buff Rocky Mountain Favorite Solar Transit No. 16724 on all work prior to July 30, 1924, and A. Lietz transit No. 6166 on all work after that date.

The Buff transit is equipped with U-shaped standards, $4\frac{1}{2}$ inch horizontal circle, 4 inch vertical circle, and Improved Smith solar attachment.

The Lietz transit is equipped with a full vertical circle and the Smith solar attachment.

Unless otherwise specified all azimuth determinations are accomplished with the solar attachment, except the special observations on Polaris for meridian, upon which to test the solar apparatus, as stated in the field notes.

All measurements are made with a Lufkin 5-chain steel tape, compared with a Chesterman standard 1-chain steel tape and found correct. The measurements are made on the slope, vertical angles determined with clinometer, and the slope measurements properly reduced to horizontal distances for entry in the field notes.

The instruments were both examined, tested on the true meridian at the Federal Building in Phoenix, Arizona, found correct, and were approved by the Assistant Supervisor of Surveys for Arizona and California on May 1, 1924, conditional upon satisfactory field tests.

TEST of BUFF SOLAR TRANSIT No. 16724

June 25, 1924; Examine the adjustments of the transit and correct the level and collimation errors; then, to test the solar apparatus by comparing its indications, resulting from solar observations made during a.m. and p.m. hours with a meridian established by observations on Polaris; proceed as follows;

June 25, 1924; at camp, at the J.W. Stewart ranch, in NE. $\frac{1}{4}$ of sec. 15, T. 16 N., R. 4 W., Gila and Salt River Base and Meridian, Arizona, latitude $34^{\circ}46'15''$ N., and longitude $112^{\circ}40\frac{1}{2}'$ W., at 4 h., 00 m. p.m., l.m.t., set off $34^{\circ}46'$ N., on the lat. arc, $23^{\circ}23\frac{1}{2}'$ N. on the decl. arc, and determine a meridian with the solar and mark a point thereon by a tack in a peg driven firmly in ground about 8 chs. N. of station.

June 26, 1924; at same station, at 1 h. 21 m. a.m. by watch set by Western Union Telegraph clock to read correct local mean time, observe Polaris at eastern elongation, making four observations, two each with the telescope in direct and reversed positions, and mark mean point in the line thus determined by a tack in a peg set firmly in the ground about 8 chs. N.

Azimuth of Polaris at eastern elongation = $1^{\circ}20'50''$

June 26, 1924; at 8 h. 00 m. a.m. lay off azimuth of Polaris $1^{\circ}21'$ to the west and mark meridian thus determined by a tack in the peg set last evening, on which the meridian falls about $\frac{1}{2}'$ east of the mark determined by the solar.

At 8 h. 30 m. a.m. l.m.t. set off $34^{\circ}46'$ N. on the lat. arc, $23^{\circ}22'$ N. on the decl. arc, and determine with the solar a meridian and mark a point thereon by a tack in the peg set last evening. This point falls 1' in arc east of the meridian established by Polaris observation.

As all of the solar observations made during the usual hours of

solar work come within 1' of the true meridian, conclude that the adjustment of the instrument is satisfactory.

The magnetic bearing of the true meridian is N.15° W.

TEST OF THE A. LIETZ TRANSIT NO. 6166

July 29, 1914. At same station, examine the adjustments of the transit and correct the level and collimation errors; then, to test the solar apparatus, by comparing its indications resulting from solar observations made during a.m. and p.m. hours with a meridian established by observations on Polaris, proceed as follows:

July 29, 1914. At 4 h., 30 m. p.m., l.m.t., set off 34° 46' N. on the lat. arc, 18° 40' N. on the decl. arc and determine a meridian with the solar and mark a point thereon by a tack driven in the stake already set about 8 chs. N. of station. This mark falls 1½' E. of the meridian established by the Polaris observations.

July 30, 1914. At 7 h., 00 m., a.m., l.m.t., with the lat. arc unchanged, set off 18° 31' N. on the decl. arc and determine a meridian with the solar and mark a point thereon by a nail driven in the stake already set about 8 chs. N. of station. This mark falls ½' W. of the meridian established by the Polaris observations.

Each solar observation agrees within 1½' with the meridian established by Polaris observations, therefore conclude that the adjustment of the instrument is satisfactory.

The magnetic bearing of the true meridian is N.14° 55' W.

Resurvey of
4th Standard Parallel North thru Range 4 West
and North Boundary of Township 16 North, Range 4 West

The 4th Standard Parallel North, thru Range 4 West was surveyed by S.W. Foreman, U.S.D.S. in 1871 and no retrace-ment or resurvey of this part of the parallel is of record.

The record of said survey describes the monumenting of all the std. sec. and $\frac{1}{4}$ sec. cors. and also both std. Tp. cors., with wood posts set in ground and mound of earth, with pits as accessories and none of said cors. had bearing trees.

The only recorded change in these cor. monuments is that of the two std. Tp. cors; the std. cor. of Ts. 17 N., Rs. 4 and 5 W. having been reconstructed in original position by A.B. Mader, U.S.D.S. in 1902, and the std. cor. of Ts. 17 N., Rs. 3 and 4 W. was recorded by W.R. Johnston U.S.T. in 1916 as a marked stone in a mound of stone instead of the wood post of the original survey.

In retracing the parallel as a preliminary process to the resurvey thereof as hereinafter described, all of the std. sec. and $\frac{1}{4}$ sec. cors. in R. 4 W. with the exception of the std. $\frac{1}{4}$ sec. cor. of sec. 36, were found to be monumented with stones properly set and marked, but with no accessories. The origin of these stone cor. monuments is unknown, but in view of the fact that alongside two of them were found remains of the original wood posts, the location of others agreeing with fence lines constructed many years ago, and the general agreement of the bearings and distances with the original record, conclude that all of said stone cor. monuments have been set at the original cor. points and are so regarded in this resurvey.

The East and West boundaries and the subdivision lines of T. 16 N., R. 4 W. were surveyed by S.W. Foreman U.S.D.S. in 1871 and 1872, establishing closing cors. at the several points of intersection of the range lines and subdivision lines with the Parallel, monumenting all said closing cors. with wood posts set in ground and mound of earth, with pits as accessories, and no bearing trees to any of them.

The West boundary of T. 16 N., R. 4 W. was resurveyed in 1903 by A.B. Mader U.S.D.S. who reestablished the closing cor. of Ts. 16 N., Rs. 4 and 5 W. at approximately 22 $\frac{1}{2}$ chs. E. of its original position and monumenting same with a granite stone witnessed by two bearing trees,

There is no record of any change in any of the closing cors. of the subdivision lines and E. bdy. of T. 16 N., R. 4 W.

In retracing the Parallel as hereinafter described, no trace of any of the subdivisional closing cors. of T. 16 N., R. 4 W. could be found.

The following notes describe a resurvey of the 4th Std. Parallel N. thru R. 4 W., combined with a resurvey of the North Bdy. of T. 16 N., R. 4 W., reestablishing the std. $\frac{1}{4}$ sec. cor. of sec. 36, T. 17 N., R. 4 W., the closing cor. of Ts. 16 N., Rs. 4 and 5 W., and all of the subdivisional closing cors. of T. 16 N., R. 4 W., at distances proportional to the record of their establishment, destroying the closing cor. of Ts. 16 N., Rs. 4 and 5 W. reestablished by A.B. Mader U.S.D.S. in 1903, and reconstructing the std. cor. of Ts. 17 N., Rs. 3 and 4 W., all existing std. sec. and $\frac{1}{4}$ sec. cors. and the closing cor. of Ts. 16 N., Rs. 3 and 4 W., in their original positions.

After determining by proportion the points for the closing cors. of T. 16 N., R. 4 W., and the lengths of the N. bdrs. of all secs. in said Tp., a set of $\frac{1}{4}$ sec. cors. is established on the Parallel at midpoints of said N. bdrs. with the exception of sec. 6 where the $\frac{1}{4}$ sec. cor. is established at such point as will maintain the original proportion between the East and West halves of said section.

Resurvey of
4th Standard Parallel North thru Range 4 West
and North Boundary of Township 16 North, Range 4 West

BOOK 3740

5

Retracement for Resurvey.

-
- 8.30 From std.cor.of Ts.17 N.,Rs.4 and 5 W.,hereinafter described,
East,on random line,on S.bdy.of sec.31 (W. $\frac{1}{2}$)
Diligent search in this vicinity fails to reveal any trace of the original closing cor.of Ts.16 N.,Rs.4 & 5 W.
Set temp. C.C.
- 40.45 Intersect the std. $\frac{1}{2}$ sec.cor.,hereinafter described.
True course and dist.of W. $\frac{1}{2}$ of S.bdy.of sec.31 are therefore, West, 40.45 chs.
Thence
- 40.20 East,on random line,on S.bdy.of sec.31 (E. $\frac{1}{2}$)
Fall 46 lks.S.of the std.cor.of secs.31 and 32,hereinafter described.
True course and dist.of E. $\frac{1}{2}$ of S.bdy.of sec.31 are therefore, S.89°20'W.,40.20 chs.
-
- 6.50 East,on random line,on S.bdy.of sec.32 (W. $\frac{1}{2}$)
Diligent search in this vicinity fails to reveal any trace of the original closing cor.of secs.5 and 6.
Set temp. C.C.
- 40.01 Fall 57 lks.S.of the std. $\frac{1}{2}$ sec.cor.,hereinafter described.
True course and dist.of W. $\frac{1}{2}$ of S.bdy.of sec.32 are therefore,S.89°11'W.,40.01 chs.
Thence
- 39.90 East,on random line,on S.bdy.of sec.32 (E. $\frac{1}{2}$)
Fall 42 lks.S.of std.cor.of secs.32 and 33,hereinafter described.
True course and dist.of E. $\frac{1}{2}$ of S.bdy.of sec.32 are therefore, S.89°24'W.,39.90 chs.
-
- 6.09 East,on random line,on S.bdy.of sec.33 (W. $\frac{1}{2}$)
Diligent search in this vicinity fails to reveal any trace of original closing cor.of secs.4 and 5.
Set temp. C.C.
- 39.99 Fall 29 lks.S.of std. $\frac{1}{2}$ sec.cor.,hereinafter described.
True course and dist.of W. $\frac{1}{2}$ of S.bdy.of sec.33 are therefore, S.89°35'W.,39.99 chs.
Thence
- 40.07 East,on random line,on S.bdy.of sec.33 (E. $\frac{1}{2}$)
Fall 15 lks.S.of std.cor.of secs.33 and 34,hereinafter described.
True course and dist.of E. $\frac{1}{2}$ of S.bdy.of sec.33 are therefore, S.89°47'W.,40.07 chs.
-
- 5.86 East,on random line,on S.bdy.of sec.34 (W. $\frac{1}{2}$)
Diligent search in this vicinity fails to reveal any trace of original closing cor.of secs.3 and 4.
Set temp. C.C.
- 39.96 Fall 62 lks.S.of std. $\frac{1}{2}$ sec.cor.,hereinafter described.
True course and dist.of W. $\frac{1}{2}$ of S.bdy.of sec.34 are therefore, S.89° 7'W.,39.96 chs.
Thence,
- 40.03 East,on random line,on S.bdy.of sec.34 (E. $\frac{1}{2}$)
Fall 52 lks.S.of std.cor.of secs.34 and 35,hereinafter described.
True course and dist.of E. $\frac{1}{2}$ of S.bdy.of sec.34 are therefore, S.89°15'W.,40.03 chs.
-
- 6.00 East,on random line,on S.bdy.of sec.35 (W. $\frac{1}{2}$)
Diligent search in this vicinity fails to reveal any trace of original closing cor.of secs.2 and 3.
Set temp. C.C.
- 40.06 Fall 13 lks.N.of std. $\frac{1}{2}$ sec.cor.,hereinafter described.
True course and dist.of W. $\frac{1}{2}$ of S.bdy.of sec.35 are therefore, N.89°49'W.,40.06 chs.

Resurvey of
4th Standard Parallel North thru Range 4 West
and North Boundary of Township 16 North, Range 4 West

chains
39.98 Thence,
East, on random line, on S. bdy. of sec. 35 (E. $\frac{1}{2}$)
Fall 15 lks. S. of std. cor. of secs. 35 and 36, hereinafter
described.
True course and dist. of E. $\frac{1}{2}$ of S. bdy. of sec. 35 are there-
fore, S. 89° 47' W., 39.98 chs.

6.12 East, on random line, on S. bdy. of sec. 36
Diligent search in this vicinity fails to reveal any
trace of original closing cor. of secs. 1 and 2.
Set temp. C.C.

40.00 Diligent search in this vicinity fails to reveal any
trace of std. $\frac{1}{4}$ sec. cor.
Set temp. $\frac{1}{4}$ sec. cor.

80.14 Fall 44 lks. S. of std. cor. of Ts. 17 N., Rs. 3 and 4 W., here-
inafter described.
True course and dist. of S. bdy. of sec. 36 are therefore
S. 89° 41' W., 80.14 chs.

6.00 From std. cor. of Ts. 17 N., Rs. 3 and 4 W.,
East, on random line, on part of N. bdy. of sec. 1.
Intersect closing cor. of Ts. 16 N., Rs. 3 and 4 W., hereinafter
described.
True course and dist. of this part of the N. bdy. of sec.
1, T. 16 N., R. 4 W. are therefore, West, 6.00 chs.

RESURVEY

The std. cor. of Ts. 17 N., Rs. 3 and 4 W. is a granite stone,
10x10x8 ins. above ground, firmly set, marked SC and 6
grooves on N. face, and 6 grooves on each of E. and W.
faces. No accessories.

Reconstruct this cor. monument as follows:

Alongside stone set an iron post, 3 ft. long, 3 ins. in diam.,
27 ins. in ground, for std. cor. of Ts. 17 N., Rs. 3 and 4 W.,
marked on brass cap.

SC
T 17 N
RAW R3W
S36 S31

1924

No bearing trees available.

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

Thence,
S. 89° 41' W., on true line, on S. bdy. of sec. 36.
Over rolling land thru scattering undergrowth.
Descend 63 ft. over W. slope to

14.00 Foot of descent, brs. NE. and SW.
Enter level bottom land in Williamson Valley.

14.50 Wire fence, brs. N. and S.

16.00 Wash, 40 lks. wide, 2 ft. deep, course N.

20.05 Fence cor. brs. N. 10 lks. dist. from which wire fences
extend N. and E.

34.00 (40.00 chs. in westing from C.C. of Ts. 16 N., Rs. 3 and 4 W.,
or midpoint of N. bdy. of sec. 1) Set an iron post, 3 ft.
long, 1 in. in diam., 27 ins. in the ground, and deposit
a bottle at base of post, for $\frac{1}{4}$ sec. cor. of sec. 1 only,
marked on brass cap,

$\frac{1}{4}$ S 1

1924

No bearing trees available.

40.07 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in

Resurvey of
4th Standard Parallel North thru Range 4 West
and North Boundary of Township 16 North, Range 4 West

chains diam., 27 ins. in the ground, and deposit a bottle at base of post, for reestablished std. $\frac{1}{4}$ sec. cor. of sec. 36, marked on brass cap

SC
 $\frac{1}{4}$ S 36

1924

No bearing trees available.

72.60 Wire fence, brs. N. and S.
74.01 (Proportional dist. or 80.01 chs. in westing from C.C. of Ts. 16 N., Rs. 3 and 4 W.) Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, and deposit a stone marked with a cross (X) at base of post, for reestablished closing cor. of secs. 1 and 2, marked on brass cap.

T 17 N R 4 W
S 36
S 2 | S 1
T 16 N R 4 W
C | C

1924

No bearing trees available.

74.30 Wire fence, brs. N. and S.
78.50 Leave level and enter gently rolling land. Ascend slightly over NE. slope to
80.14 Intersect std. cor. of secs. 35 and 36, which is a sandstone, 10x8x4 ins. above ground, firmly set, marked SC on N. face, 1 groove on E. face and 5 grooves on W. face. No accessories.

Reconstruct this cor. monument as follows:
Alongside stone, set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground and deposit a stone marked with a cross (X) at base of post, for std. cor. of secs. 35 and 36, marked on brass cap,

SC
T 17 N R 4 W
S 35 | S 36

1924

No bearing trees available.
This cor. is on an old fence line which bears westerly herefrom.

Land, rolling, level and gently rolling.
Soil, sandy and gravelly, 2nd and 3rd rate.
Timber, none.
Undergrowth, greasewood.
Good grass.

S. 89° 47' W., on true line, on S. bdy. of sec. 35 (E. $\frac{1}{2}$)
Over gently rolling land, thru scattering undergrowth, along old fence line. Ascend gradually over NE. slope.

6.50 Wire fence, brs. N. and S.
19.20 Ranch road, brs. N. and S.
31.50 Dim road, brs. NE. and SW.
33.95 (40.08 chs. in westing from C.C. of secs. 1 and 2, or midpoint of N. bdy. of sec. 2) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, and deposit a stone marked with a cross (X) at base of post, for $\frac{1}{4}$ sec. cor. of sec. 2 only, marked on brass cap

$\frac{1}{4}$ S 2

1924

No bearing trees available.

39.98 Intersect std. $\frac{1}{4}$ sec. cor. of sec. 35, which is a granite stone, 10x8x5 ins. above ground, loosely set, marked SC $\frac{1}{4}$ on N. face. No accessories.

Resurvey of
4th Standard Parallel North thru Range 4 West
and North Boundary of Township 16 North, Range 4 West

chains Reconstruct this cor.monument as follows:
Alongside stone, set an iron post, 3 ft. long, 1 in. in diam.
27 ins. in the ground, and deposit a stone marked with a
cross (X) at base of post, for std. $\frac{1}{4}$ sec. cor. of sec. 35,
marked on brass cap

S C
 $\frac{1}{4}$ S 35

1924

No bearing trees available.

Thence,
N. $89^{\circ}49'W.$, on true line, on S. bdy. of sec. 35 (W. $\frac{1}{4}$)
Over gently rolling land, thru scattering undergrowth, along
old fence line, bearing E. and W. Ascend gradually over
NE. slope.

21.52 Wash, 25 lks. wide, 2 ft. deep, course NE.
34.05 (Proportional dist. or 80.16 chs. in westing from C.C. of
secs. 1 and 2) Set an iron post, 3 ft. long, 2 ins. in diam.
27 ins. in ground, and deposit a stone marked with a
cross (X) at base of post, for reestablished closing
cor. of secs. 2 and 3, marked on brass cap

T17N RAW
S 35
S3 | S2
T16N RAW
C C

1924

No bearing trees available

40.06 Intersect the std. cor. of secs. 34 and 35, which is a soft
sandstone, 10x10x6 ins. above ground, firmly set, marked
SC on N. face, 2 grooves on E. face and 4 grooves on W.
face. No accessories.

Reconstruct this cor. monument as follows:
Alongside stone, set an iron post, 3 ft. long, 2 ins. in
diam., 27 ins. in ground, and deposit a stone marked with
a cross (X) at base of post, for std. cor. of secs. 34 and
35, marked on brass cap

S C
T17N RAW
S34 | S35

1924

No bearing trees available.

This cor. is on an old fence line bearing E. and W.

Land, gently rolling.
Soil, sandy, 2nd and 3rd rate,
Timber, none.
Undergrowth, greasewood.

S. $89^{\circ}15'W.$, on true line, on S. bdy. of sec. 34 (E. $\frac{1}{4}$)
Over gently rolling land, thru scattering undergrowth, along
old fence line bearing E. and W. Ascend gradually over
NE. slope.

34.07 (40.08 chs. in westing from C.C. of secs. 2 and 3 or midpoint
of N. bdy. of sec. 3) Set an iron post, 3 ft. long, 1 in. in
diam., 27 ins. in ground, and deposit a stone marked with
a cross (X) at base of post, for $\frac{1}{4}$ sec. cor. of sec. 3 only
marked on brass cap

$\frac{1}{4}$ S 3

1924

No bearing trees available.

40.03 Intersect std. $\frac{1}{4}$ sec. cor. of sec. 34, which is a granite stone
6x5x4 ins. above ground, firmly set, marked SC $\frac{1}{4}$ on N. face.

Resurvey of
4th Standard Parallel North thru Range 4 West
and North Boundary of Township 16 North, Range 4 West

chains

No accessories.
Reconstruct this cor.monument as follows:
Alongside stone, set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, and deposit a stone marked with a cross (X) at base of post, for std. $\frac{1}{4}$ sec. cor. of sec. 34, marked on brass cap

S C
 $\frac{1}{4}$ S 34

1924

No bearing trees available.
A cedar stake, about 8 ins. long, marked $\frac{1}{4}$ S is lying on the ground about 10 lks. S. of this cor., which is probably a part of the original cor. monument.

Thence,
S. $89^{\circ} 7' W.$, on true line, on S. bdy. of sec. 34 (W. $\frac{1}{2}$)
Over gently rolling land, thru scattering undergrowth.
Ascend gradually over NE. slope.

33.65 Fence cor. brs. S. 30 lks. dist. from which wire fences extend S. and W.

34.11 (proportional dist. of 80.15 chs. in westing from C.C. of secs. 2 and 3) Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, and deposit a stone marked with a cross (X) at base of post, for reestablished closing cor. of secs. 3 and 4, marked on brass cap

T17N R4W
S34
S4 | S3
T16N | R4W
C C
1924

from which,
A juniper, 12 ins. in diam., brs. S. $60\frac{3}{4}^{\circ} E.$, 112 lks. dist., marked T16N R4W S3 CC BT
No other bearing trees available.

38.47 Enter dense timber, brs. N. and SE.
39.96 Intersect std. cor. of secs. 33 and 34, which is a granite stone, 12x12x8 ins. above ground, firmly set, marked SC on N. face, and 3 grooves on each on E. and W. faces. No accessories.
Reconstruct this cor. monument as follows:
Alongside stone, set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for std. cor. of secs. 33 and 34, marked on brass cap

S C
T17N | R4W
S33 | S34

1924

from which
A juniper, 14 ins. in diam., brs. N. $28\frac{3}{4}^{\circ} E.$, 129 lks. dist., marked T17N R4W S34 SC BT
A juniper, 12 ins. in diam., brs. W. $59\frac{3}{4}^{\circ} W.$, 19 lks. dist., marked T17N R4W S33 SC BT
This cor. is on a wire fence line bearing N. and S.
Fence cor. brs. N. 2.40 chs. dist. from which fences extend W. and S.
Fence cor. brs. S. 20 lks. dist. from which fences extend E. and N.

Land gently rolling.
Soil, sandy and gravelly, 2nd and 3rd rate.
Timber, juniper and cedar near W. end of line. None elsewhere.
Undergrowth, scrub oak and juniper and sagebrush.
Good grass.

S. $89^{\circ} 47' W.$, on true line, on S. bdy. of sec. 33 (E. $\frac{1}{2}$)
Over gently rolling land, thru dense timber and scattering

Resurvey of
4th Standard Parallel North thru Range 4 West
and North Boundary of Township 16 North, Range 4 West

chains	<p>undergrowth, parallel to wire fence 2.40 chs. N. Ascend gradually over NE. slope</p>
34.06	<p>(39.91 chs. in westing from C.C. of secs. 3 and 4 or midpoint of N. bdy. of sec. 4) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor. of sec. 4 only, marked on brass cap</p> <p style="text-align: center;">$\frac{1}{4}$ S 4</p> <p style="text-align: center;">1924</p> <p>from which</p> <p>A juniper, 14 ins. in diam., brs. S. 4° W., 56 lks. dist., marked $\frac{1}{4}$ S4 BT</p> <p>A juniper, 18 ins. in diam., brs. S. 40° W., 75 lks. dist., marked $\frac{1}{4}$ S4 BT</p>
36.50	<p>Draw, 6 lks. wide, 2 ft. deep, course NE.</p>
40.07	<p>Intersect std. $\frac{1}{4}$ sec. cor. of sec. 33, which is a granite stone 6x6x10 ins. above ground, loosely set, marked SC $\frac{1}{4}$ on N. face. No accessories.</p> <p>Reconstruct this cor. monument as follows: Alongside stone, set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, and deposit a stone marked with a cross (X) at base of post, for std. $\frac{1}{4}$ sec. cor. of sec. 33, marked on brass cap</p> <p style="text-align: center;">S C $\frac{1}{4}$ S 33</p> <p style="text-align: center;">1924</p> <p>from which</p> <p>A juniper, 15 ins. in diam., brs. N. 16$\frac{1}{2}$° E., 91 lks. dist., marked SC $\frac{1}{4}$ S33 BT</p> <p>No other bearing trees available.</p> <p>Thence S. 89° 35' W., on true line, on S. bdy. of sec. 33 (W. $\frac{1}{2}$) Over gently rolling land, thru dense timber and scattering undergrowth, parallel to wire fence 2.20 chs. N. Ascend gradually over NE. slope.</p>
33.90	<p>(Proportional dist. of 79.82 chs. in westing from C.C. of secs. 3 and 4) Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for reestablished closing cor. of secs. 4 and 5, marked on brass cap</p> <p style="text-align: center;">T17N R4W S33 S5 S4 T16N R4W C C 1924</p> <p>from which</p> <p>A juniper, 36 ins. in diam., brs. S. 86$\frac{1}{4}$° E., 102 lks. dist., marked T16N R4W S4 CC BT</p> <p>A juniper, 24 ins. in diam., brs. S. 26° W., 148 lks. dist., marked T16N R4W S5 CC BT</p>
36.60	<p>Wire fence, brs. N. and S. Fence cor. brs. N. 2.20 chs. dist., from which fences extend E., N., and S.</p>
39.99	<p>Intersect std. cor. of secs. 32 and 33, which is a quartz stone, 6x8x6 ins. above ground, firmly set, marked SC on N. face, 2 grooves on W. face and 4 grooves on E. face. No accessories.</p> <p>Reconstruct this cor. monument as follows: Alongside stone, set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, and deposit a stone marked with a cross (X) at base of post, for std. cor. of secs. 32 and 33, marked on brass cap</p> <p style="text-align: center;">SC T17N R4W S32 S33</p> <p style="text-align: center;">1924</p>

Resurvey of
4th Standard Parallel North thru Range 4 West
and North Boundary of Township 16 North Range 4 West

chains

No bearing trees available.
An old decayed cedar post is lying on the ground along-
side this cor., which is probably the original cor.
monument.

Land, gently rolling.
Soil, sandy and gravelly, 2nd and 3rd rate.
Timber, juniper, oak and walnut.
Undergrowth, scrub oak and juniper and sagebrush.
Fair grass.

S. 89° 24' W., on true line, on S. bdy. of sec. 32 (E. 1/2)
Over gently rolling land, thru dense timber and scattering
undergrowth. Ascend gradually over NE. slope +
0.20 Old road, brs. N. and S.
9.30 Ranch road, brs. NW. and SE.
33.66 (39.75 chs. in westing from C.C. of secs. 4 and 5 or midpoint
of N. bdy. of sec. 5) Set an iron post, 3 ft. long, 1 in. in
diam., 26 ins. in ground, for 1/4 sec. cor. of sec. 5 only,
marked on brass cap

1/4 S 5

1924

from which

- A juniper, 14 ins. in diam., brs. S. 2 1/4° W., 85 lks. dist.,
marked 1/4 S 5 BT
- A juniper, 14 ins. in diam., brs. S. 47 3/4° W., 100 lks. dist.,
marked 1/4 S 5 BT

36.70 Wash, 10 lks. wide, 3 ft. deep, course NE.
39.90 Intersect std. 1/4 sec. cor. of sec. 32, which is a granite stone,
6x8x8 ins. above ground, firmly set and marked SC 1/4 on N.
face. No accessories.

Reconstruct this cor. monument as follows:

Alongside stone, set an iron post, 3 ft. long, 1 in. in
diam., 27 ins. in ground, for std. 1/4 sec. cor. of sec. 32,
marked on brass cap

S C
1/4 S 32

1924

from which

- A pine, 8 ins. in diam., brs. N. 49° E., 76 lks. dist.,
marked SC 1/4 S 32 BT
- A pine, 8 ins. in diam., brs. N. 27 1/4° W., 69 lks. dist.,
marked SC 1/4 S 32 BT

Thence

S. 89° 11' W., on true line, on S. bdy. of sec. 32 (W. 1/2)
Over gently rolling land, thru dense timber and scattering
undergrowth. Ascend 79 ft. over NE. slope to
25.00 Foot of hill. Leave gently rolling and enter heavily
rolling land. Ascend 62 ft. over E. slope
31.20 Top of hill. Descend 27 ft. over W. slope to
33.51 (Proportional dist. of 79.50 chs. in westing from C.C. of
secs. 4 and 5) Set an iron post, 3 ft. long, 2 ins. in
diam., 27 ins. in ground, for reestablished closing cor.
of secs. 5 and 6, marked on brass cap

T17 N R4W
S 32
S6 S5
T16N R4W.
C C
1924

No bearing trees available.
Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, S. of cor.
Descend 20 ft. over W. slope to

Resurvey of
4th Standard Parallel North thru Range 4 West
and North Boundary of Township 16 North, Range 4 West

chains

36.00 Foot of hill. Leave heavily rolling and enter gently rolling land. Descend 21 ft. over W. slope to

40.01 Intersect std. cor. of secs. 31 and 32, which is a granite stone, 6x8x4 ins. above ground, firmly set, marked SC on N. face, 5 grooves on E. face and 1 groove on W. face. No accessories.

Reconstruct this cor. monument as follows:
Alongside stone, set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground and deposit a stone marked with a cross (X) at base of post, for std. cor. of secs. 31 and 32, marked on brass cap

S	C
T17N	R4W
S31	S32

1924

No bearing trees available.

Land, gently rolling and heavily rolling.
Soil, sandy and gravelly, 2nd and 3rd rate.
Timber, pine and juniper.
Undergrowth, scrub oak and juniper and sagebrush.

S. 89° 20' W., on true line, on S. bdy. of sec. 31 (E. $\frac{1}{2}$)
Over gently rolling land, thru scattering timber and undergrowth. Descend gradually over NW. slope.

0.10 Wire fence, brs. N. and S. Fence cor. brs. S. 2.30 shs. dist., from which fences extend W. and N.

5.00 Ascend 23 ft. over NE. slope

9.30 Descend 35 ft. over N. slope to

18.00 Low ridge, brs. NW. and SE. Descend 38 ft. over SW. slope

28.50 Wash, 15 lks. wide, 2 ft. deep, course SW. Ascend gradually over SE. slope

33.79 (Proportional dist. of 40.29 chs. in westing from C.C. of secs. 5 and 6) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground and deposit a stone marked with a cross (X) at base of post, for $\frac{1}{4}$ sec. cor. of sec. 6 only, marked on brass cap

$\frac{1}{4}$ S 6

1924

No bearing trees available.

40.20 Ascend gradually over SE. slope to
Intersect std. $\frac{1}{4}$ sec. cor. of sec. 31, which is a granite stone, 6x8x6 ins. above ground, firmly set and marked SC $\frac{1}{4}$ on N. face. No accessories.

Reconstruct this cor. monument as follows:
Alongside stone, set an iron post, 3 ft. long, 1 in. diam., 27 ins. in ground, for std. $\frac{1}{4}$ sec. cor. of sec. 31, marked on brass cap

S	C
$\frac{1}{4}$ S 31	

1924

from which

- A juniper, 12 ins. in diam., brs. N. 24 $\frac{1}{4}$ ° E., 215 lks. dist., marked SC $\frac{1}{4}$ S 31 BT
- A juniper, 30 ins. in diam., brs. N. 36 $\frac{1}{4}$ ° W., 168 lks. dist., marked SC $\frac{1}{4}$ S 31 BT

Thence

West, on true line, on S. bdy. of sec. 31 (W. $\frac{1}{2}$)
Over gently rolling land, thru scattering timber and undergrowth. Ascend 40 ft. over SE. slope

9.18 A point 7 lks. N. of the closing cor. of Ts. 16 N., Rs. 4 and 5 W., reestablished by A. B. Mader, U. S. D. S. in 1903, which is a granite stone, 6x6x6 ins. above ground, firmly set,

Resurvey of
4th Standard Parallel North thru Range 4 West
and North Boundary of Township 16 North, Range 4 West

chains properly marked and witnessed by two bearing trees,
one each SE. and SW. of cor.
Obliterate the marking on the stone and bearing trees.

14.20 Low ridge, brs. NE. and SW. Descend 54 ft. over NW. slope
to Tp. closing cor.

20.00 Wire fence, brs. N. 89° W. and S. 89° E.

32.06 (Proportional dist. of 78.76 chs. in westing from C.C. of
secs. 5 and 6) Set an iron post, 3 ft. long, 3 ins. in
diam., 27 ins. in ground, for reestablished closing cor.
of Ts. 16 N., Rs. 4 and 5 W., marked on brass cap

T17N R4W
S31
S1 | S6
R5W | R4W
T16N
CC
1924

from which

A juniper, 15 ins. in diam., brs. S. 36½° E., 30 lks. dist.,
marked T16N R4W S6 CC BT

A juniper, 9 ins. in diam., brs. S. 26½° W., 49 lks. dist.,
marked T16N R5W S1 CC BT

39.70 Descend 35 ft. over NW. slope
Wash, 20 lks. wide, 5 ft. deep, course SW.

Ascend slightly over SE. slope to

40.65 X Intersect the previously reconstructed std. cor. of Ts. 17 N.,
Rs. 4 and 5 W., which is a granite stone, 10x8x6 ins.
above ground, firmly set, properly marked, and witnessed
by one bearing tree NW.

This cor. monument being a good durable stone, properly
marked and witnessed, no reconstruction or alteration
of same is required to insure permanency.

Land, gently rolling.

Soil, gravelly 3rd rate.

Timber, juniper and pine.

Undergrowth, sagebrush and scrub juniper.

40.45

RESURVEY of South Boundary of Township 16 North, Range 4 West and

14 SURVEY of North Bdy. of Frac'l Township 15 1/2 North, Range 4 West

The south bdy. of T.16 N., R.4 W. was surveyed in 1871 by S.W. Foreman U.S.D.S., establishing thereon 1/4 sec. and sec. cors. alternately at 40 ch. intervals counting from the cor. of Ts.15 and 16 N., Rs.3 and 4 W.

The original survey was run on a due West bearing and all sec. and 1/4 sec. cors. were established with a common reference to areas in Ts.15 and 16 N., R.4 W.

Deputy surveyor Foreman in 1871 also established the cor. of Ts.15 & 16 N., Rs.3 & 4 W., and the cor. of Ts.15 & 16 N., Rs.4 & 5 W.

No retracement or resurvey of S.bdy. of T.16 N., R.4 W. is of record and the only recorded change in original cor. monuments is that of the cor. of Ts.15 & 16 N., Rs.4 & 5 W., which was reconstructed and altered to refer to Ts.16 N., Rs.4 & 5 W. only, by P. Contzen U.S.D.S. in 1897.

The following notes describe a resurvey of the entire S. bdy. of T.16 N., R.4 W.,

The only original cor. found on the line in retracement for this resurvey was the 1/4 sec. cor. of secs.1 & 36, which is reconstructed and altered to refer to quarters of sec. 36 only.

The cor. of T.16 N., R.4 W. only (SW.cor.) is reestablished by means of cardinal offsets from two temporary tp. cors., one set at record bearing and dist. from the original 1/4 sec. cor. of secs.1 & 36 on S.bdy. of Tp. and the other set at original record bearing and dist. from closing cor. of Ts.16 N., Rs.4 & 5 W. on 4th Std. Par. N., reestablished thereon by proportion based upon the original survey of the range line, as hereinbefore described.

None of the original sec. or 1/4 sec. cors. could be found on the W. bdy. of T.16 N., R.4 W.

After determining the point for reestablishment of the SW.cor. of T.16 N., R.4 W. and the true bearing therefrom of the W. 5 1/2 miles of S.bdy. of said Tp., the 1/4 sec. and sec. cors. referring to areas in T.16 N., R.4 W. only are reestablished on the line at record intervals.

The resurveys and surveys executed under this group create a new township designated as Fractional T.15 1/2 N., R.4 W., the N.bdy. of which is identical in position with the S. bdy. of T.16 N., R.4 W.

The establishment on the S.bdy. of T.16 N., R.4 W. of closing cors. and 1/4 sec. cors. referring to said new tp. constitutes a SURVEY of N.bdy. of same, which is combined with the Resurvey notes except that the descriptions of the closing cors. are omitted for the reason that such descriptions are given in the book of this group describing the survey of Fractional T.15 1/2 N., R.4 W.

Retracement for Resurvey

- From cor. of Ts.15 & 16 N., Rs.3 & 4 W., hereinafter described,
- 40.32 West, on random line, on S.bdy. of sec.36 (E. 1/2)
- Fall 9 lks. S. of original 1/4 sec. cor. of secs.1 and 36, hereinafter described.
- True course and dist. of E. 1/2 of S.bdy. of sec.36 are therefore, S. 89° 52' E., 40.32 chs.
- Thence
- West, on random line, searching diligently at record intervals for the original cor. monuments and setting temp. cors. at such intervals.
- 438.50 Fail to find a trace of any sec. or 1/4 sec. cor. and at (Record dist.) Diligent search in this vicinity fails to reveal any trace of cor. of Ts.16 N., Rs.4 & 5 W.
- Set temp. cor. (A) of T.16 N., R.4 W. only (SW.cor.)
-
- From reestablished closing cor. of Ts.16 N., Rs.4 & 5 W., on 4th Std. Par. N., hereinbefore described,
- South, on random line, on W.bdy. of T.16 N., R.4 W., searching diligently at record intervals for the original cors. and setting temp. cors. at such intervals.
- Fail to find a trace of any sec. or 1/4 sec. cor. and at

RESURVEY of South Boundary of Township 16 North, Range 4 West
and

SURVEY of North Bdy. of Frac'l Township 15 $\frac{1}{2}$ North, Range 4 West 15

chains
480.40


(Record dist.) Diligent search in this vicinity fails to reveal any trace of cor. of Ts. 16 N., Rs. 4 & 5 W.
Set temp. cor. (B) of T. 16 N., R. 4 W. only (SW. cor.)
Continue line and measurement

481.55

A point 6.58 chs. W. of temp. cor. (A) of T. 16 N., R. 4 W. only.
The point for reestablishment of said Tp. cor. is therefore at 1.15 chs. N. of temp. cor. (A) and 6.58 chs. E. of temp. cor. (B)
The resulting true bearing and dist. of the W. 5 $\frac{1}{2}$ miles of S. bdy. of T. 16 N., R. 4 W. are therefore, S. 89° 51' E., 438.50 chs., and of W. bdy. are N. 0° 47' W., 480.40 chs.

RESURVEY

At point determined as described above, reestablish the Tp. cor. as follows:
Set an iron post, 3 ft. long, 3 ins. in diam., 28 ins. in ground for reestablished cor. of T. 16 N., R. 4 W. only (SW. cor.), marked on brass cap



from which


- A juniper, 10 ins. in diam., brs. N. 18° E., 214 lks. dist., marked T16N R4W S31 BT
- A juniper, 10 ins. in diam., brs. N. 56° E., 257 lks. dist., marked T16N R4W S31 B⁴

Thence

- S. 89° 51' E., on true line, on S. bdy. of sec. 31
- Over nearly level land, thru scattering timber & undergrowth
- 1.25 Road, Fair Oaks to Prescott, brs. NW. and SE.
- 2.50 Wash, 30 lks. wide, 2 $\frac{1}{2}$ ft. deep, course N. 70° E.
- 14.00 Wash, 30 lks. wide, course S. 70° E.
- 15.94 Closing cor. of Frac. T. 15 $\frac{1}{2}$ N., R. 4 W. and T. 16 N., R. 5 W., described in Book "B" of this group.

Thence continuing line and measurement along N. bdy. of Frac. T. 15 $\frac{1}{2}$ N., R. 4 W.


- 16.50 Same wash, 30 lks. wide, 4 ft. deep, course N. 70° E.
- 23.50 Road, Fair Oaks to Prescott, brs. NE. and SW.
- 34.50 The NW. cor. of cultivated field brs. S. 125 lks. dist. Field extends E. about 10 chs. and SW. about 8 chs.
- 38.50 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 31 only, mkd. on brass cap



from which

- A walnut, 18 ins. diam., brs. N. 86 $\frac{1}{2}$ ° E., 117 lks., mkd. $\frac{1}{4}$ S 31 BT
- A juniper, 30 ins. diam., brs. N. 19 $\frac{1}{2}$ ° W., 286 lks., mkd. $\frac{1}{4}$ S 31 BT
- A malpais stone, 14x10x8 ins. above ground, firmly set, mkd. FSM No. 2, brs. S. 89° 54' E., 7.56 chs. dist.
- A frame house brs. N. 81 $\frac{1}{2}$ ° W. 5.00 chs. dist.

- 41.60 (40 chs. in westing from C.C. of secs. 5 & 6, Frac. T. 15 $\frac{1}{2}$ N., R. 4 W.) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground and deposit a stone mkd. with a cross (X) at base of post, for $\frac{1}{4}$ sec. cor. of sec. 6 only, mkd. on brass cap



No bearing trees available.

- 47.50 Leave nearly level and enter rolling land. Ascend 40 ft. over NW. slope
- 50.25 Road, Skull Valley to Fair Oaks, brs. NW. and SE.
- 75.50 Low ridge, brs. NE. and SW. Descend gradually over SE. slope to

RESURVEY of South Boundary of Township 16 North, Range 4 West
and16 SURVEY of North Boundary of Frac'1 Tp.15 $\frac{1}{2}$ N., R.4 W.

chains.

78.50

Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for reestablished cor. of secs. 31 and 32 only, marked on brass cap

T16N	R4W
S31	S32
S19	
T15 $\frac{1}{2}$ N R4W	

1924

from which

A juniper, 6 ins. in diam., brs. N. 60° E., 190 lks. dist., marked T16N R4W S32 BT

A juniper, 7 ins. in diam., brs. N. 64 $\frac{3}{4}$ ° W., 120 lks. dist., marked T16N R4W S31 BT

Land, nearly level and rolling.

Soil, sandy and stony, 2nd and 3rd rate.

Timber, oak, walnut and juniper.

Undergrowth, scrub oak and juniper and manzanita.

S. 89° 51' E., on true line, on S. bdy. of sec. 32

Over rolling sandy land, thru scattering timber and dense undergrowth.

Descend gradually over SE. slope

3.10

Intersect subdivision line bet. secs. 19 and 20, Frac. T. 15 $\frac{1}{2}$ N., R. 4 W. C.C. of said secs. established here as described in Book "B" of this group.

29.00

Leave sandy and enter stony land, brs. N. and S.

40.00

Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 32 only, marked on brass cap

$\frac{1}{4}$ S 32

1924

from which

An oak, 6 ins. in diam., brs. N. 9° W., 20 lks. dist., marked $\frac{1}{4}$ S32 BT.

A pinion, 7 ins. in diam., brs. N. 70 $\frac{1}{4}$ ° W., 101 lks. dist., marked $\frac{1}{4}$ S32 BT

42.50

Ascend gradually over S. slope

43.20

(Midpoint of N. bdy. of sec. 20) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 20, Frac. T. 15 $\frac{1}{2}$ N., R. 4 W., marked on brass cap

$\frac{1}{4}$ S 20

1924

from which

A pinion, 4 ins. in diam., brs. S. 14 $\frac{3}{4}$ ° E., 101 lks. dist., marked $\frac{1}{4}$ S20 BT

A juniper, 10 ins. in diam., brs. S. 29 $\frac{1}{4}$ ° W., 90 lks. dist., marked $\frac{1}{4}$ S20 BT

61.20

Descend gradually over S. slope

80.00

Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in the ground to bed rock, and raise a mound of stone around post, for reestablished cor. of secs. 32 and 33 only, marked on brass cap

T16N	R4W
S32	S33
S20	
T15 $\frac{1}{2}$ N R4W	

1924

RESURVEY of South Boundary of Township 16 North, Range 4 West
and

SURVEY of North Bdy. of Fractional Township 15¹/₂ North, Range 4 West West 17

Chains

from which,
A pinion 14 ins. in diam. bears N12°E. 37 lks. dist.,
marked T16N., R4W., S33 BT.
A pinion 10 ins. in diam. bears N37¹/₂°W. 135 lks. dist.,
marked T16N., R4W., S32 BT.
Land rolling.
Soil sandy and stony 3 rd. and 4 th. rate.
Timber pinion, oak, and juniper.
Undergrowth, juniper and oak brush.

3.29 S 89°51'E. on true line on S. bdy. of sec. 33.
Over stony hilly land, through oak, pinion, and juniper
timber and manzanita brush undergrowth.; Descend
183 ft. over E. slope.
Point of intersection of subdivision line
bet. secs. 20 and 21, T15¹/₂N., R4W.; Closing cor. of
said secs. established here as described in the
field notes of the resurvey of T15¹/₂N., R4W.
19.50 Over granite boulders.
23.20 Wire fence, bears N40°E. and S40°W.
33.20 Wash 30 lks. wide, 2 ft. deep, course N20°E. Ascend 29 ft. to
40.00 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in
the ground for reestablished ¹/₄ sec. cor. of sec.
33, marked on brass cap

1/4 S 33

1924

from which,
A pinion 12 ins. in diam. bears N42°E. 130 lks. dist.,
marked ¹/₄ S 33 BT.
A pinion, 12 ins. in diam., bears N43°W. 87 lks. dist., marked ¹/₄ S 33 BT
41.00 Top of ridge, bears N. and S.; Descend slightly over E. slope to
43.33 (Mid-point bet. closing cors.); Set an iron post 3 ft. long
1 in. in diam. 27 ins. in the ground for ¹/₄ sec.
cor. of sec. 21, T15¹/₂N., R4W., marked on brass
cap

1/4 S 21

1924

from which,
A cedar 36 ins. in diam. bears S20¹/₂°E. 126 lks. dist.,
marked ¹/₄ S21 BT.
A cedar 24 ins. in diam. bears S25°W. 41 lks. dist.,
marked ¹/₄ S21 BT.
Descend 74 ft. over E. slope.
57.00 Top of ridge bears N. and S.; Desc. 74 ft. over E. slope.
64.50 Wash, 100 lks. wide, 3 ft. deep, course N.; Asc. 75 ft. over
W. slope.
80.00 Set an iron post 3 ft. long, 2 ins. in diam. 10 ins. in
the ground to bedrock, supported in a mound of
stone for reestablished cor. of secs. 33 and 34,
marked on brass cap

T16N | R4W
S33 | S34

S21
T15¹/₂N | R4W

1924

RESURVEY of South Boundary of Township 16 North, Range 4 West
and

18 SURVEY of North Bdy. of Parcel Township 15 North, Range 4 West

Chains

from which,
A juniper 15 ins. in diam. bears N28°E. 92 lks. dist.,
marked T16N., R4W., S34 BT.
A juniper 9 ins. in diam. bears N41½°W. 90 lks. dist.,
marked T16N., R4W., S33 BT.
Land broken and hilly.
Soil stony 3 rd. and 4th. rate.
Timber oak, pinion, cedar and juniper.
Undergrowth, manzanita and juniper brush.

3.37

S 89°51'E. on true line on S. bdy. of sec. 34.
Ascend 75 ft. over NW. slope, through heavy juniper and
cedar timber and brush undergrowth.
Point of intersection of subdivision line bet. secs. 21
and 22, T15½N., R4W.; Closing corner of said
secs. established here as described in the
field notes of the survey of T15½N., R4W.
Top of ridge bears N. and S.; desc. 23 ft. over SE. slope.
The true point for reestablished ¼ sec. cor. of sec. 34
falls in bed of wash, 30 lks. wide, 2½ ft. deep,
course NE., where prevailing conditions would
ensure the destruction of the corner, therefore
at.
Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in
the ground for witness cor. to reestablished ¼
sec. cor. of sec. 34., marked on brass cap

29.50
40.00

40.50

WC ¼ S 34

1924

from which,
A juniper 8 ins. in diam. bears N21¾°E. 238 lks. dist.,
marked WC ¼ S 34 BT.
A juniper 30 ins. in diam. bears N66¼°W. 220 lks. dist.,
marked WC ¼ S 34 BT.
Wire fence bears N. and S.
(Mid-point bet. closing cors.); Set an iron post 3 ft. long,
1 in. in diam. 23 ins. in the ground to bedrock,
supported in a mound of stone for ¼ sec. cor.
of sec. 22, T15½N., R4W., marked on brass cap

43.20
43.35

¼ S 22

1924

from which,
A juniper 16 ins. in diam. bears S79¾°E. 355 lks. dist.,
marked ¼ S 22 BT.
A juniper 30 ins. in diam. bears S39¾°W. 312 lks. dist.,
marked ¼ S 22 BT.
Sand wash 15 lks. wide, 3 ft. deep, course NW.
Road from Tohey's ranch to Williamson Valley, bears N20°E.
and S20°W.
Top of ridge bears NE. and SW. thence over SW. slope.
Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the
ground for reestablished cor. of secs. 34 and 35,
marked on brass cap

50.00
54.90
61.50
80.00

T16N	R4W
S34	S35
S22	
T15½N R4W	

1924

RESURVEY of South Boundary of Township 16 North, Range 4 West
and

SURVEY of North Bdy. of Frac. Township 15 $\frac{1}{2}$ North, Range 4 West

Chains

from which,
 A juniper .18 ins. in diam. bears N21 $\frac{3}{4}$ °E. 343 lks. dist.,
 marked T16N., R4W., S35 BT.
 A juniper 12 ins. in diam. bears N16 $\frac{3}{4}$ °W. 216 lks. dist.,
 marked T16N., R4W., S34 BT.
 Land rolling mountains.
 Soil stony 3 rd. and 4th. rate.
 Timber pinion, cedar, and juniper.
 Undergrowth, cedar, and pinion.

S 89°51'E. on true line on S. bdy. of sec. 35.
 Ascend 63. ft. over SW. slope of spur over rolling stony
 mountainous land, through scattering juniper and
 cedar timber and brush undergrowth.
 3.32 Point of intersection of subdivision line bet. secs. 22
 and 23, T15 $\frac{1}{2}$ N., R4W.; Closing cor. of said secs.
 established here as described in the field notes
 of the resurvey of T15 $\frac{1}{2}$ N., R4W..
 30.00 Top of spur bears SE.; desc. 140 ft. over NE. slope.; Leave
 timber bears NE. and SW..
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the
 ground for reestablished $\frac{1}{4}$ sec. cor. of sec. 35,
 marked on brass cap.

$\frac{1}{4}$ S 35
 1924

43.40 Raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high N. of cor.
 (Mid-point bet. closing cors.); Set an iron post 3 ft. long
 1 in. in diam. 27 ins. in the ground for $\frac{1}{4}$ sec.
 cor. of sec. 23, T15 $\frac{1}{2}$ N., R4W., marked on brass cap

$\frac{1}{4}$ S 23
 1924

65.00 Raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high S. of cor.
 Foot of descent.; leave mountainous land, bears N. and S.;
 Enter rolling bottom land.
 69.70 Dry sand wash 60 lks. wide 3 ft. deep, course N.; Asc.
 about 20 ft. over W. slope.
 73.30 Road from Skull Valley to Williamson Valley, bears N. and
 S.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the
 ground for reestablished cor. of secs. 35 and 36
 marked on brass cap

T16N	R4W
S35	S36
S23	
T15 $\frac{1}{2}$ N	R4W

1924

Deposit marked stone at base of monument.
 Land rolling and mountainous.
 Soil sandy and stony 2 nd. and 3 rd. rate.
 Timber juniper and cedar.
 Undergrowth scrub cedar and sage brush.

RESURVEY of South Boundary of Township 16 North, Range 4 West

SURVEY of North Bay of Frac. Township 15 1/2 North, Range 4 West

Chains

S 89°51'E. on true line. on S. bdy. of sec. 36. (W 1/2)
 Over rolling gravelly land, through scattering oak brush
 and undergrowth.

3.49 Point of intersection of subdivision line bet. secs. 23
 and 24, T15 1/2 N., R4W.; Closing cor. of said secs.
 established here as described in the field notes
 of the resurvey of T15 1/2 N., R4W.

40.00 Intersect the orig. 1/4 sec. cor. of secs. 1 and 36, which is
 a granite stone 6x8x5 ins. above ground, firmly
 set, marked 1/4 S on N. face.; No cor. accessories.
 Reconstruct this corner monument as follows
 Alongside the stone monument,
 set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the
 ground and deposit a marked stone at the base,
 of post, for 1/4 sec. cor. of sec. 36 only, marked
 on brass cap


1/4 S 36

Thence 1924
 S 89°52'E. on true line, on S. bdy. of sec. 36 (E 1/2)
 3.49 (40.00 chs. easterly from closing cor. of secs. 23 and 24,
 T15 1/2 N., R4W.) Set an iron post 3 ft. long, 1 in.
 diam. 27 ins. in the ground and deposit a marked
 stone at base for 1/4 sec. cor. of sec. 36
 24, T15 1/2 N., R4W., marked on brass cap

1/4 S 24

13.62 Sand wash 30 lbs. wide 2 ft. deep, course NW.; asc. 52 ft.
 over SW. slope to

40:32 Intersect the orig. cor. of Tps. 15 and 16 N., Rs. 3 and 4
 W., which is a cedar stake 2 ft. long, 2 1/2 ins. sq.
 set in small mound stone, marked TXVIN SXXXI on NE,
 RIIIW, SVI on SE., TXVN SI on SW., and RIVW SXXXVI
 on NW. faces with 6 notches on N, E, S, and W. edges.
 This cor. being in a dilapidated condition; reconst-
 ruct it as follows; Alongside the old cedar stake,
 set an iron post 3 ft. long, 3 ins. in diam. 27 ins. in the
 ground and deposit a marked stone at the base, for
 cor. of Frac. T15 1/2 N., R. 4W., and T15 N., R. 3 W. and
 Tps. 16 N., Rs. 3 and 4 W., marked on brass cap



Land rolling and hilly.
 Soil gravelly and stony 2 nd. and 3 rd. rate.
 Timber scattering cedar.
 Undergrowth oak and juniper brush.

Resurvey of the East boundary of Township 16 North., Range 4 West.

Chains

This township boundary was surveyed by S.W. Foreman U.S. Deputy Surveyor, in 1871, establishing corners on the line common to Ts. 16 N., Rs. 3 and 4 W. and no retracement or resurvey of any portion thereof is of record. In the resurvey of this line, described in the following field notes, all missing corners are reestablished common to both Tps. at proportional distances on a right line bet. the cor. of Frac. T. 15 1/2 N., R. 4 W., T. 15 N., R. 3 W. and Ts. 16 N., Rs. 3 and 4 W. and the closing cor. of Tps. 16 N., Rs. 3 and 4 W., on the 4th. Std. Parallel North.

Retracement for Resurvey


From the closing cor. of Ts. 16 N., closing cor. of Tps. 16 N., Rs. 3 and 4 W., on the 4th. Std. Parallel North, hereinafter described, South, (record course) on a random line, searching diligently at record intervals for the original corners on the range line.

484.82 Find no trace of any old cor. on the line. At Fall 607 lks. W. of the cor. of Frac. T. 15 1/2 N., R. 4 W., T. 15 N., R. 3 W. and Ts. 16 N., Rs. 3 and 4 W. hereinbefore described. True course and dist. of the E. bdy. of T. 16 N., R. 4 W. are, therefore N 0°43' W. 484.86 chs., which, to maintain the original proportion bet. sec. cor. intervals, gives 80.81 chs. for the reestablished length of each of the 6 mile intervals.


RESURVEY

From the cor. of Frac. T. 15 1/2 N., R. 4 W., T. 15 N., R. 3 W. and Ts. 16 N., Rs. 3 and 4 W., hereinbefore described. N 0°43' W. on true line bet. secs. 31 and 36. Over rolling stony land, through oak and juniper brush undergrowth.

12.70 Dry ravine 5 lks. wide. 1 1/2 ft. deep, course W.
40.40 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. with marked stone 27 ins. in the ground for reestablished 1/4 sec. cor., marked on brass cap



80.81 (Proportional dist.) Set an iron post 3 ft. long, 2 ins. in diam. with marked stone 27 ins. in the ground, for reestablished cor. of secs. 25, 30, 31, and 36 marked on brass cap



Land rolling.
Soil stony and gravelly, 2 nd. and 3 rd. rate.
Timber scattering cedar.
Undergrowth, oak and cedar brush.


22. Resurvey of the East boundary of Township 16 North, Range 4 West.

Chains

N 0°43'W. on true line bet. secs. 25 and 30.


Over rolling sandy land, through scattering juniper timber and oak brush undergrowth.

40.40 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. with tin can at base, 27 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap



48.00 Dim road bears N20°W. and S20°E.

80.81 (Proportional dist.) Set an iron post 3 ft. long, 2 ins. in with glass bottle at base, 27 ins. in the ground for reestablished cor. of secs. 19, 24, 25, and 30, marked on brass cap



1924

From this point a quartz stone 8x6x5 ins, marked 24 on W. and 19 on E. faces, set by local surveyors, bears N87°57'W. 5.91 chs. dist.

I destroy this corner stone.

Land rolling.

Soil sandy 2 nd. rate.

Timber scattering juniper.

Undergrowth, oak and sage brush.


Fair grass.

N 0°43'W. on true line bet. secs. 19 and 24.

Over rolling sand land through scattering oak and sage brush undergrowth.

28.10 Wash 6 lks. wide, 2 ft. deep, course N15°E.

40.40 (Proportional dist.); Set an iron post 3 ft. long, 1 in. in diam. with marked stone at base, 27 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap



From this point a granite stone 10x8x5 ins. above ground set by local surveyors, marked $\frac{1}{4}$ S bears N73°25'W. 5.43 chs. dist.


I destroy all trace of this cor.

70.48 Sand wash 20 lks. wide 2 ft. deep, course N20°W.

80.81 (Proportional dist.) Set an iron post 3 ft. long, 2 ins. in diam. with marked stone at base, 27 ins. in the ground for reestablished cor. of secs. 13, 18, 19, and 24, marked on brass cap

Resurvey of the East boundary of Township 16 North., Range 4 West

Chains



1924

From this point a sand stone, 10x8x4 ins. above ground marked with 3 notches on N. and S. edges, set by private surveyors, bears N72°44'W. 4.66 chs. dist.


I destroy all evidence of this corner.

Land rolling.
Soil sandy 2 nd. rate.
No timber.
Undergrowth, sage brush.

N 0°43'W. on true line bet. secs. 13 and 18. Over rolling sandy land, through scattering sagebrush undergrowth.

31.27 Road from Williamson Valley to Prescott Arizona, bears N70°E. and S70°W.


40.40 (Proportional dist.); Set an iron post 3 ft. long, 1 in. in diam. with marked stone at base, 27 ins. in the ground for reestablished 1/4 sec. cor., marked on brass cap



From this point a quartz stone 8x6x5 ins., lying on the ground, marked 1/4 S, bears N72°48'W. 3.96 chs. dist. I destroy all evidence of this stone.

79.07 Road from Williamson Valley to Prescott Arizona, bears NW. and SE.

80.81 (Proportional dist.); Set an iron post 3 ft. long, 2 ins. in diam. with marked stone at base, 27 ins. in the ground for reestablished cor. of secs. 7, 12, 13, and 18, marked on brass cap



1924

From this point a granite stone 6x7x4 ins. above ground, marked dimly with 2 notches on N. and 4 notches on S. edges, bears N73°12'W. 3.18 chs. dist.; This stone has been set by private Surveyors.

I destroy all evidence of this cor.

Corner post of wire fence bears N49°46'W. 2.68 chs. dist.; Fence bears N 160.00 chs. and W. 40.00 chs. dist.

Land rolling.
Soil sandy 2 nd. rate.
No timber.
Undergrowth, sagebrush.


Chains

N 0°43'W. on true line bet. secs. 7 and 12.
Over rolling sandy and gravelly land, through scattering
sagebrush undergrowth.

16.05 Sand wash 20 lks. wide, 3 ft. deep course W.

23.25 Road from Williamson Valley to Simmons Ariz., bears NE.,
and SW.

40.40 (Proportional dist.); Set an iron post 3 ft. long, 1 in.
in diam. with marked stone at base, 27 ins. in
the ground for reestablished $\frac{1}{4}$ sec. cor.,
marked on brass cap




43.15 Gulch 5 lks. wide, 3 ft. deep, course SW.

68.36 Same road from Williamson Valley to Simmons Ariz., bears
N10°W. and S10°E.

76.76 Wire fence, bears E. and W.

80.81 (Proportional dist.); Set an iron post 3 ft. long, 2 ins. in
diam. with marked stone at base, 27 ins. in the
ground for reestablished cor. of secs. 1, 6, 7, and
12, marked on brass cap



From this point cor. of wire fences bears N40°17'W. 142 lks.
dist.; Fences bears N, S, and W.

Land rolling.

Soil sandy and gravelly, 2 nd. rate.

No timber.


Undergrowth, sagebrush.

N 0°43'W. on true line bet. secs. 1 and 6.

Over low rolling gravelly hills.

8.50 Top of ridge bears NW. and SE.; desc. gentle NE. slope.

40.40 (Proportional dist.); Set an iron post 3 ft. long, 1 in. in
diam. with marked stone at base, 27 ins. in the
ground for reestablished $\frac{1}{4}$ sec. cor., marked
on brass cap



From this point cor. of wire fences bears S79°W. 57 lks.
dist. Fences bear N, S, and W.

55.65 Draw 10 lks. wide, 2 ft. deep, course N70°E.; asc. 41 ft. over
SE. slope.

60.35 Wire fence bears E. and W.

62.05 Top of hill bears E.; desc. 29 ft. over N. slope.

65.50 Foot of descent, thence over rolling land on E. slope

75.00 Ascend 40 ft. over stony S. slope of hill.

80.81 Intersect the closing cor. of Ts. 16. N., 4th. cor. of R. 4. W.,
Rs. 3 and 4 W., on the 4th. Standard Parallel North,

chains

which is a red granite stone 24x10x10 ins. above ground firmly set, marked CC and 6 grooves on S. face, and 6 grooves on each of E. and W. faces and witnessed by a mound of earth and stone, 3 ft. base, 2 ft. high, S. of cor. No bearing trees.

Reconstruct this cor. monument as follows:

Alongside stone, set an iron post, 3 ft. long, 3 ins. in diam., 27 ins. in the ground, for closing cor. of Ts. 16 N., Rs. 3 and 4 West, marked on brass cap

T17N	R3W
S	31
S1	S6
R4W	R3W
T16N	
C	C
1924	

No bearing trees available.


Fence cor. brs. S. 45° W. 43 lks. dist., from which wire fences extend W. and S.

Land, rolling and hilly.

Soil, gravelly and stony, 2nd and 3rd rate.

Timber, none.

Undergrowth, sagebrush.



chains

The West bdy. of T.16 N., R.4 W. was surveyed in 1871 by S.W. Foreman, U.S.D.S. establishing thereon all cors. with a common reference to Ts.16 N., Rs.4 & 5 W. In 1901, A.B. Mader U.S.D.S. made an independent resurvey of the entire line reestablishing all cors. common to both of said tps., and terminating said range line with a closing cor. of Ts.16 N., Rs.4 & 5 W. at point on 4th Std. Par. N. 9.18 chs. W. of std. $\frac{1}{4}$ sec. cor. of sec. 31, T.17 N., R.4 W. This resurvey placed the range line approximately 20 chs. E. of original position and caused a deficiency of about 160 acres in the record area of each of the W. range of secs. of T.16 N., R.4 W.

No other retracement or resurvey of this range line is of record.

The following notes describe a resurvey of the Foreman survey of the West bdy. of T.16 N., R.4 W. In this resurvey all sec. and $\frac{1}{4}$ sec. cors. are reestablished to refer to areas in T.16 N., R.4 W. only, at record intervals on a direct line between the reestablished cor. of T.16 N., R.4 W. only (SW. cor.) and the reestablished original closing cor. of Ts.16 N., Rs.4 & 5 W. on 4th Std. Par. N., thereby restoring to the W. range of secs. in T.16 N., R.4 W. as near as practicable, their record areas.

From retracements previously made of W. bdy. of T.15 N., R.4 W. it is evident that closing cors. will be required on W. bdy. of T.16 N., R.4 W. for the E. range of secs. of T.16 N., R.5 W., said closing cors. to be established at points of intersection of the true sec. lines run between the sec. cors. on the Mader range line and the $\frac{1}{4}$ sec. cors. on the latitudinal sec. lines of said E. range of secs. of T.16 N., R.5 W.

The East $\frac{1}{4}$ sec. cors. of the E. range of secs. of T.16 N., R.5 W. are to be reestablished on W. bdy. of T.16 N., R.4 W. at points of intersection of the latitudinal center lines of said secs. run bet. the $\frac{1}{4}$ sec. cors. on the Mader range line and the $\frac{1}{4}$ sec. cors. on the 1st meridional sec. line of T.16 N., R.5 W.

The establishment of said closing cors. of T.16 N., R.5 W., and the reestablishment of said $\frac{1}{4}$ sec. cors. of said tp. is omitted from the following notes but is fully described in Book "D" of this group under heading "Resurvey of East bdy. of T.16 N., R.5 W. "

Retracement for Resurvey.

The retracement of this township boundary was made as a preliminary process to the resurvey of the S. bdy. of T.16 N., R.4 W. as hereinbefore described, in which retracement no original cor. could be found, and a true course and distance of N.0°47'W., 480.40 chs. was determined for the range line.

RESURVEY

From the reestablished cor. of T.16 N., R.4 W. only (SW. cor.) hereinbefore described.


N.0°47'W., on true line, on W. bdy. of sec. 31.
Over nearly level land, thru scattering timber and undergrowth.

0.45 Road, Fair Oaks to Prescott, brs. NW. and SE.

Resurvey of the West boundary of Township 16 North., Range 4 West 27


Chains

- 3.00 Rocky wash, 10 lks. wide, course S80°E.;
Leave nearly level and enter mountainous land.
- 20.50 Top of rocky spur, slopes SE.; Descend 340 ft. over SW. slope.
- 38.60 Rocky ravine 10 lks. wide, course E.; Ascend 175 ft. over E. slope.
- 40.00 (Record dist.) Set an iron post 3 ft. long, 1 in. in diam. 18 ins. in the ground to bedrock, supported in a mound of stone for reestablished $\frac{1}{4}$ sec. cor. of sec. 31, T16N., R4W., marked on brass cap



1924

- 55.50 Raise a mound of stone 2 ft. base, 1 1/2 ft. high E. of cor.
- 80.00 Top of spur bears NE.; Descend 121 ft. over NW. slope to (Record dist.) Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the ground for reestablished cor. of secs. 30 and 31, marked on brass cap




1924

from which,

- A juniper 4 ins. in diam. bears N39 1/2° E. 35 lks. dist., marked T16N., R4W., S30 BT.
- A juniper 12 ins. in diam. bears S36° E., 103 lks. dist., marked T16N., R4W., S31 BT.
- Land, nearly level and mountainous.
- Soil, stony, 3rd. and 4th. rate.
- Timber, oak and juniper.
- Undergrowth, juniper and oak brush.

- 40.00 N 0°47' W. on true line on W. bdy. of sec. 30. Descend 320 ft. over NW. slope over stony mountainous land, through cedar and juniper timber and dense manzanita and mountain mahogany brush undergrowth (Record dist.) Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of sec. 30, T16N., R4W., marked on brass cap.



1924

from which,

- A juniper 5 ins. in diam. bears N59 1/2° E. 135 lks. dist., marked S30 BT.
- A juniper 4 ins. in diam. bears N78 1/2° E. 137 lks. dist., marked S 30 BT.
- 49.25 Dry ravine 10 lks. wide, course NE.; Ascend 29 ft. over SE. slope
- 65.00 Top of spur bears NE.; Descend 86 ft. over NW. slope to
- 80.00 (Record dist.), Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the ground for reestablished cor. of secs. 19 and 30, T16N., R4W., marked on brass cap

Chains

T16N	T16N
S13	S19
R5W	S30
	R4W

1924

from which,

- A juniper 8 ins. in diam. bears N62 $\frac{1}{2}$ °E.39 lks. dist., marked T16N.,R4W.,S19 BT.
- A juniper 5 ins. in diam. bears S22 $\frac{1}{2}$ °E.111 lks. dist., marked T16N.,R4W.,S30 BT.

Land mountainous.
 Soil stony 3rd. and 4th. rate.
 Timber, cedar and juniper.
 Undergrowth, manzanita and mountain mahogany brush.

N 0°47'W. on true line on W.bdy. of sec.19.
 Descend 69 ft. over NW. slope over stony mountainous land, through cedar and juniper timber and brush undergrowth.

- 24.00 Ravine 8 lks. wide, course NE.; Ascend 40 ft. over SE. slope
- 35.00 Top of spur bears NE.; Descend 63 ft. over NW. slope
- 40.00 (Record dist.) Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for reestablished sec. cor. of sec.19, T16N.,R4W., marked on brass cap

1/2 S19

1924

from which,

- A juniper 8 ins. in diam. bears S39 $\frac{1}{2}$ °E. 14 lks. dist., marked S 19 BT.
- A juniper 15 ins. in diam. bears N23 $\frac{1}{2}$ °E.159 lks. dist., marked S 19 BT.
- .44.50 Horse Wash 40 lks. wide, course N70°E.; Ascend 155 ft. over stony SE. slope to
- 75.00 Top of ridge, bears NE. and SW. thence over rolling land.
- 80.00 (Record dist.) Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the ground for reestablished cor. of secs.18 and 19, T16N.,R4W., marked on brass cap

T16N	T16N
S12	S 18
R5W	S 19
	R4W


1924

from which,


- A juniper 10 ins. in diam. bears N48°E. 118 lks. dist., marked T16N.,R4W.,S18 BT.
- A juniper 16 ins. in diam. bears S38 $\frac{1}{2}$ °E.93 lks. dist., marked T16N.,R4W.,S19 BT.

Chains. Land rolling mountains.
Soil stony 3 rd. rate.
Timber juniper and cedar.
Undergrowth, oak brush.

N 0°47' W. on true line on W. bdy. of sec. 18.
Descend 46 ft. over NW. slope over rolling stony mountainous
land, through juniper and cedar timber and brush
undergrowth.
30.25 Dry ravine 15 lks. wide course NE.; thence over rolling
land.
40.00 (Record dist.) Set an iron post 3 ft. long, 1 in. in diam.
28 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor.
of sec. 18 T16N., R4W., marked on brass cap.



from which,
A juniper 30 ins. in diam. bears S50°E. 270 lks. dist.,
marked $\frac{1}{4}$ S18 BT.
A juniper 24 ins. in diam. bears S81 $\frac{1}{2}$ °E. 304 lks. dist.,
marked $\frac{1}{4}$ S18 BT.
48.25 Dry gulch 20 lks. wide 4 ft. deep, course E.
57.20 Gulch 15 lks. wide 2 ft. deep, course E.
67.50 Gulch 15 lks. wide 6 ft. deep, course E.
79.50 Wash 30 lks. wide 8 ft. deep, course S50°E.
80.00 (Record dist.); Set an iron post 3 ft. long, 2 ins. in diam.
30 ins. in the ground for reestablished cor. of secs.
7 and 18., marked on brass cap.



1924

from which,
A juniper 15 ins. in diam. bears S48 $\frac{1}{2}$ °E. 208 lks. dist.,
marked T16N., R4W., S 18 BT.
No other trees within limits.
Raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high E. of cor.
Land rolling and hilly.
Soil stony 3 rd. rate.
Timber cedar and juniper,
Undergrowth, oak and juniper brush.

N 0°47' W. on true line on W. bdy. of sec. 7.
Ascend 23 ft. over rolling SW. slope, through scattering
cedar and juniper timber and brush undergrowth.
9.00 Dim road to spring in center of sec. 1 T16N., R5 W. bears
E. and W.
38.50 Top of divide bears NW. and SE.; Desc. 51 ft. over N. slope
over hilly land.
40.00 (Record dist.) Set an iron post 3 ft. long, 1 in. in diam.
27 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor.
of sec. 7 T16N., R4W., marked on brass cap

Chains

$\frac{1}{4}$ S 7

1924

- from which,
- A Juniper 12 ins. in diam. bears N68 $\frac{1}{4}$ °E. 26 lks. dist., marked $\frac{1}{4}$ S7 BT.
- A pinion 4 ins. in diam. bears S25°E. 94 lks. dist., marked $\frac{1}{4}$ S7 BT.
- 41.50 Ravine 10 lks. wide, course N60°E.; Asc. 28 ft. over SE. slope.
- 58.00 Top of flat topped spur bears E.; Desc. 60 ft. over N. slope
- 68.50 Dry ravine 10 lks. wide, course E.; Asc. 70 ft. over S. slope.
- 74.00 Top of spur bears E.; Desc. 29 ft. over N. slope to
- 80.00 (Record dist.) Set an iron post 3 ft. long 2 ins. in diam. 24 ins. in the ground to bedrock, supported in a mound of stone for reestablished cor. of secs. 6 and 7., marked on brass cap

T16N	T16N
S1	S6
R5W	S7
	R4W

1924

- from which,
- A juniper 14 ins. in diam. bears N68°E. 126 lks. dist., marked T16N., R4W., S 6 BT.
- A juniper 10 ins. in diam. bears S35 $\frac{1}{4}$ °E. 112° lks. dist., marked T16N., R4W., S 7 BT.
- Land rolling and hilly.
- Soil, stony 2 nd. and 3 rd. rate.
- Timber, cedar, pinion, and juniper.
- Undergrowth, oak and juniper brush.

N 0°47'W. on true line on W. bdy. of sec. 6.
 Descend 104 ft. over N slope over hilly land, through pinion, cedar, and juniper timber and brush undergrowth.

- 14.00 Dry ravine 15 lks. wide 4 ft. deep, course N70°E.
- 25.50 Wire fence bears NE. and SW.
- 26.40 Wire fence bears NW. and SE.
- 27.50 Wire fence bears NW. and SE.
- 29.11 Intersect line 1-8 of H.E.S. No. 364 3.02 chs. N48°36'W. of cor. No. 8 of said claim.
- 30.50 Leave hilly land, bears NW. and SE.; Enter level bottom land along Humphrey's Wash.
- 37.50 At point 2.50 chs. S 0°47'W. from true point for reestablishment of the $\frac{1}{4}$ sec. cor. of sec. 6 only.
- 40.00 (Record dist.) The true cor. point falls in Humphrey's Wash. where it would be impracticable to set monument owing to liability of floods causing destruction of same, therefore, at 37.50 ch. station on W. bdy.
- 37.50 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for witness cor. to the reestablished $\frac{1}{4}$ sec. cor. of sec. 6 T16N., R4W., marked on brass cap

WC $\frac{1}{4}$ S6

1924

from which,

Resurvey of the West boundary of Township 16 North, Range 4 West

chains	A juniper, 28 ins. in diam., brs. S. 15 1/4° E., 341 lks. dist., marked WC 1/4 S6 BT
	A walnut, 14 ins. in diam., brs. S. 40° E., 195 lks. dist., marked WC 1/4 S6 BT
	Corner No. 8 of Forest Homestead Entry Survey No. 364 brs. S. 12° 55' E., 10.66 chs. dist.
	Corner No. 4 of same H.E.S. brs. N. 0° 32' W., 18.01 chs. dist.
	Continue across Forest Homestead No. 364
38.50	Right bank of Humphrey's Wash, brs. NW. and SE., 5 ft. high. Thence across said wash, course SE.
40.00	True point for reestablished 1/4 sec. cor. of sec. 6.
42.80	Left bank of Humphrey's Wash, 4 ft. high, brs. NW. and SE. Leave said wash.
42.90	Wire fence, brs. NW. and SE. Enter cultivated land.
50.00	Wire fence, brs. NW. and SE. Leave cultivated land.
51.00	Center of branch of Humphrey's Wash, 200 lks. wide, banks 3 ft. high, course SE.
55.56	Intersect line 3-4 of Forest Homestead Entry Survey No. 364, at a point 9 lks. N. 57° 32' W. from Cor. No. 4 thereof. Leave H.E.S. No. 364.
56.00	Top of low hill, brs. NW. and SE. Descend 10 ft. over N. slope
57.00	Wash, 5 lks. wide, course SW. Ascend 40 ft. over SE. slope
75.00	Low ridge, brs. NE. and SW. Descend 29 ft. over NW. slope to
80.40	Intersect closing cor. of Ts. 16 N., Rs. 4 and 5 W., on 4th Std. Par. N., reestablished thereon by proportion as hereinbefore described.

Land, level and gently rolling.
 Soil, sandy and gravelly, 2nd and 3rd rate.
 Timber, pinion, cedar and juniper.
 Undergrowth, scrub juniper and oak.

Boundaries of Township 16 North, Range 4 West
 Latitudes, Departures and Closing Errors.

Lines Designated	True Courses	Dist.	Latitudes		Departures	
			N.	S.	E.	W.
South boundary	N. 89° 52' W.	40.32	.09			40.32
	N. 89° 51' W.	438.50	1.15			438.50
West boundary	N. 0° 47' W.	480.45	480.40			6.58
North boundary (4th St. Par. N.)	East	32.06				32.06
	N. 89° 20' E.	40.20	.46			40.20
	N. 89° 11' E.	40.01	.57			40.01
	N. 89° 24' E.	39.90	.42			39.90
	N. 89° 35' E.	39.99	.29			39.99
	N. 89° 47' E.	40.07	.15			40.07
	N. 89° 7' E.	39.96	.62			39.96
	N. 89° 15' E.	40.03	.52			40.03
	S. 89° 49' E.	40.06		.13		40.06
	N. 89° 47' E.	39.98	.15			39.98
N. 89° 41' E.	80.14	.44			80.14	
East	6.00				6.00	
East boundary	S. 0° 43' E.	484.86		484.82	6.07	
Convergency					.50	
Totals			485.26	484.95	484.97	485.40
			484.95			484.97
Error in latitude			0.31	0.		
Error in departure						0.43

Resurvey of the Subdivision Lines of Township 16 North, Range 4 West.

Chains The subdivision lines of T. 16 N., R. 4 W., were surveyed in 1871 by S. W. Foreman, U. S. D. S. No retracement or resurvey of any part of the subdivision lines of this township is of record. The following notes describe a resurvey of all of the subdivision lines. In the preliminary retracement no original sec. or quarter-section corners could be found in the entire township. All sec. cors. were reestablished by proportional dists. based upon the record by means of cardinal offsets from two sets of temporary sec. cors., one set on the trial meridional sec. lines and the other set on the trial latitudinal sec. lines.

The meridional lines were run thru the township from S. to N. on record bearing as random lines searching diligently at record intervals for original cor. monuments, and failing to find any cors., the trial lines were run on direct bearings from the reestablished closing cors. on the 4th Std. Par. N. to the reestablished sec. cors. on the S. bdy. of the Tp., setting temp. quarter-sec. and sec. cors. alternately on said trial lines at intervals proportional to the record.

The latitudinal lines were run thru the Tp. from E. to W. on the several record bearings as random lines searching diligently at record intervals for orig. cor. monuments, and failing to find any cors., the trial lines were run easterly from the reestablished sec. cors. on W. bdy. of the Tp. on various bearings proportional to the record, terminating said trial lines at the reestablished sec. cors. on the E. bdy. of the Tp. and setting temporary quarter-sec. and sec. cors. alternately on said trial lines at intervals proportional to the record.

After setting the two sets. of temp. sec. cors. the same are connected by cardinal offsets, at points of intersection of which the permanent sec. cors. are reestablished and the true bearings and distances of the sec. lines as hereinafter described result from the resurvey of direct lines between cors. reestablished in such manner.

All quarter-sec. cors. on sec. lines with the exception of those in the N. tier and W. range of secs. are reestablished at midpoints bet. sec. cors. The quarter-sec. cors. on the meridional sec. lines in the N. tier of secs. and on the latitudinal sec. lines in the W. range of secs. are reestablished at proper points to restore the record proportion bet. cor. intervals thereon

RESURVEY.

From the reestablished cor. of secs. 35 and 36 on S. bdy. of Tp hereinbefore described.
 N. $0^{\circ} 27'$ W., on true line, bet. secs. 35 and 36.
 Over gently rolling land, thru scattering timber and undergrowth. Desc. gradually over W. slope to
 12.50 Center of wash, 150 lks. wide, $2\frac{1}{2}$ ft. deep; course W.
 Continue gradual descent over W. slope.
 36.20 Road, Skull Valley to Prescott, bears NE. and SW.
 39.00 Wash, 5 lks. wide, $1\frac{1}{2}$ ft. deep, course S. 70° W. Enter heavily rolling land. Asc. slightly over S. slope to
 40.36 $\frac{1}{2}$ (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap

S 35 | S 36
 1924

Resurvey of the Subdivision Lines of Township 16 North, Range 4 West

Chains No bearing trees available. Raise a mound of stone 2 ft. base, 1 ft. high, W. of cor. Asc. 30 ft. over S. slope
 50.00 Ridge, brs. E. and W. Desc. 46 ft. over N. slope.
 60.00 Wash, 6 lks. wide, course W. Asc. 62 ft. over S. slope.
 67.50 Short spur, slopes SE. Desc. 37 ft. over NE. slope to
 80.73 (Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam. 27 ins. in the ground and deposit a stone mkd. with a cross (X) at base of post for reestablished cor. of secs. 25, 26, 35 and 36, marked on brass cap

T 16 N R 4 W
 S 26 | S 25
 S 35 | S 36
 1924

No bearing trees available.
 Land, gently and heavily rolling.
 Soil, sandy and stony, 2nd and 3rd rate.
 Timber, juniper and oak.
 Undergrowth, scrub oak and sage brush.

40.00 S. 89° 57' E., on random line, bet. secs. 25 and 36.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.91 Intersect the reestablished cor. of secs. 25, 30, 31 and 36 on E. bdy. of Tp., hereinbefore described.
 N. 89° 57' W., on true line, bet. secs. 25 and 36.
 Over gently rolling land, thru scattering undergrowth.
 Desc. gradually over NW. slope to
 39.95 $\frac{1}{2}$ (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam. 27 ins. in the ground and deposit a stone mkd. with a cross (X) at base of post, for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 25
 S 36
 1924

67.10 No bearing trees available.
 Road, Skull Valley to Prescott, bears NW. and SE. Asc. slightly over NE. slope to
 79.91 Intersect the reestablished cor. of secs. 25, 26, 35 and 36.
 Land, gently rolling.
 Soil, sandy and gravelly, 2nd rate.
 Timber, none.
 Undergrowth, scrub oak, sagebrush and weeds.

N. 0° 50' W., on true line, bet. secs. 25 and 26.
 Over gently rolling land, thru scattering undergrowth.
 Desc. slightly over NE. slope to
 4.57 Road, Skull Valley to Prescott, brs. NW. and SE. Asc. 30 ft. over SW. slope to
 11.00 Desc. gradually over NE. slope to
 39.36 $\frac{1}{2}$ (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, and deposit a stone mkd. with a cross (X) at base of post, for reestablished $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$
 S 26 | S 25
 1924

80.73 No bearing trees available. Desc. gradually over NE. slope to
 (Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in ground and deposit a stone mkd. with a cross (X) at base of post for reestablished cor. of secs. 23, 24, 25 and 26, marked on brass cap

chains

T16N	R4W
S23	S24
S26	S25

1924

Land rolling and hilly.
Soil sandy and gravelly 2 nd. and 3rd. rate.
No timber.
Undergrowth, oak brush.

40.00
79.93

N 89°54'E. on a random line bet. secs. 24 and 25.
Set temp. $\frac{1}{4}$ sec cor.
Intersect E. bdy. of Tp. at the reestablished cor. of secs. 19, 24, 25, and 30. hereinbefore described.

Thence
S 89°54'W. on true line bet. secs. 24 and 25.
Over rolling sandy land, through scattering oak brush undergrowth.

39.96 $\frac{1}{2}$

(Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base, 28 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$	S 24
	S 25

1924

49.90
79.93

Old road, bears NW. and SE.
(Proportional dist.) The reestablished cor. of secs. 23, 24, 25, and 26.

Land rolling.
Soil sandy 2nd. rate.
No timber.
Undergrowth, scattering oak brush.

39.36 $\frac{1}{2}$

Thence
N 0°43'W. on true line bet. secs. 23 and 24.
Over rolling gravelly land, slopes W. through scattering oak brush undergrowth.
(Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base, 28 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$	
S23	S24

1924

80.73

(Proportional dist.) Set an iron post 3 ft. long, 2 ins. in diam. with marked stone at the base, 27 ins. in the ground for reestablished cor. of secs. 13, 14, 23, and 24., marked on brass cap

T16N	R4W
S14	S13
S23	S24


1924

Land rolling, nearly level.
Soil sandy 2 nd. rate.
no timber
Undergrowth greasewood brush.

Chains

40.00 N 89°52'E. on a random line bet. secs. 13 and 24.
Set temp. 1/4 sec cor.
79.93 Intersect E. bdy. of Tp. at the reestablished cor. of secs. 13, 18, 19, and 24, hereinbefore described.

Thence
S 89°52'W. on true line bet. secs. 13 and 24.
Over nearly level sandy land, through scattering oak and sage brush.
39.96 1/2) Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base, 28 ins. in the ground for reestablished 1/4 sec. cor., marked on brass cap



1924

79.93 (Proportional dist.) The reestablished cor. of secs. 13, 14, 23, and 24.
Land rolling.
Soil sandy 2 nd. rate.
No timber.
Undergrowth, sage and oak brush.


Thence
N 0°44'W. on true line bet. secs. 13 and 14.
Over rolling sandy land, through scattering sage brush undergrowth.

4.81 Road from Skull Valley to Prescott Arizona, bears NE. and SW.

18.41 Road from Williamson Valley to Prescott Arizona, bears NE. and SW.

37.21 Road from Williamson Valley to Prescott Arizona, bears E. and W.

39.36 1/2 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. with marked stone at base, 27 ins. in the ground for reestablished 1/4 sec. cor., marked on brass cap




1924

52.75 Road from Edgar W Stephens ranch to Simmons Arizona, bears E. and W.

53.45 Wire fence bears E. 3.00 chs. and W. about 40.00 chs. dist.

57.50 Enter level valley land in Williamson Valley, bears E. and W.

80.73 (Proportional dist.) Set an iron post 3 ft. long, 2 ins. in diam. with marked stone at the base, 35 1/2 ins. in the ground for reestablished cor. of secs. 11, 12, 13, and 14., marked on brass cap



1924

Land level and rolling.
Soil sandy 1st. and 2nd. rate.
No timber.
Undergrowth, scattering sage brush.
Good grass.

Resurvey of the Subdivision lines of Township 16 North., Range 4 West

Chains	
40.00	N 89°44'E, on a random line bet. secs. 12 and 13.
79.86	Set temp $\frac{1}{4}$ sec. cor. Intersect E. bdy. of Tp. at the reestablished cor. of secs. 7, 12, 13, and 18., hereinbefore described.
	Thence
	S 89°44'W. on true line bet. secs. 12 and 13.
2.05	Over rolling sandy and gravelly land. Corner of wire fence (bears N. and W.) bears N. 160 lks. dist.
	Road from Williamson Valley to Prescott Arizona, bears N60°E. and S70°W.
12.05	Gulch 15 lks. wide, 3 ft. deep, course N20°W.
18.00	Wash 20 lks. wide 3 ft. deep course N10°W.; ascend gradually over NE. slope.
38.00	Road from Williamson Valley to Prescott Arizona, bears NW. and SE.
39.93	(Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base, 27 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. marked on brass cap
	$\frac{1}{4}$ $\frac{S 12}{S 13}$
	1924
42.00	Corner of wire fence, (bears N and E.), bears N. 177 lks. dist.
66.70	Top of ridge bears N. and S.; desc. 29 ft. over W. slope
75.40	Road from Williamson Valley to Prescott Arizona, bears N. and S.
76.00	Wire fence bears N. and S.
76.70	Leave hilly land. bears N. and S.; Enter level meadow land in Williamson Valley, bears N. and S.
79.86	(Proportional dist.) The reestablished cor. of secs. 11, 12, 13, and 14. Land level, rolling, and hilly. Soil sandy and gravelly 1st. and 2nd. rate. No timber. Undergrowth, scattering oak and sage brush.
	Thence
	N 0°51'W. on true line bet. secs. 11 and 12.
6.58	Over level meadow land in Williamson Valley.
20.58	Slough 10 lks. wide 3 ft. deep, course N5°E
21.28	Same slough, course N5°W.
21.78	Wire fence bears E. about 20 chs. and W. 60 chs. dist.
21.78	Ranch road bears E. and W.
36.08	Wire fence bears E. about 20 chs. and W. 20.00 chs. dist.
40.36 $\frac{1}{2}$	(Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. with bottle deposited at base, 36 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$
	S11 S12
	1924
61.67	Wire fence bears E. about 20 chs. and W. to intersection with N. and S. fence line about 5.00 chs. dist.
80.73	(Proportional dist.) Set an iron post 3 ft. long, 2 ins. in diam. with bottle deposited at base, 36 ins. in the ground for reestablished cor. of secs. 1, 2, 11, and 12, marked on brass cap

Chains

T16N	R4W
S2	S1
S11	S12

1924

Land level.
Soil sandy loam 1st. rate.
No timber.
No undergrowth.
Good grass.

- 40.00 N 89°44'E. on a random line bet. secs. 1 and 12
- Set temp. $\frac{1}{4}$ sec. cor.
- 79.95 Intersect E. bdy. of Tp. at the reestablished cor. of secs. 1, 6, 7, and 12, hereinbefore described.
- Thence
- S 89°44'W. on true line bet. secs. 1 and 12.
- Over rolling sandy and gravelly land, slopes SW.
- .40 Road from Edgar Stephens' ranch bears N. and S.
- 1.10 Wire fence bears N. and S.; Cor of E. and W. property line fence bears N. 94 lks. dist.
- 14.50 Road to Simmons Ariz. bears SE. and W., thence in road.
- 17.70 Leave road bears SW.
- 18.00 Leave rolling land bears NW. and SE.; Enter level meadow land
- 39.97 $\frac{1}{2}$ (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. with bottle at base 27 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ $\frac{S 1}{S 12}$

1924

- 41.00 Fall 97 lks. S. of cor. of wire fence bears N and E.
- 42.00 Wire fence bears NE. and SW.; Ascend about 20 ft. over NE. slope of hill.
- 56.00 Top of hill bears NW. and SE.; Desc. about 18 ft. over Sw. slope.
- 65.00 Foot of descent in Williamson Valley; Enter level meadow land bears NE. and SW.
- 79.95 (Proportional dist.) The reestablished cor. of secs. 1, 2, 11, and 12.
- Land rolling, hilly, and level.
- Soil sandy and gravelly loam 1st. and 2nd. rate.
- No timber
- No undergrowth.
- Good grass.

- Thence
- N 0°49'W. on true line bet. secs. 1 and 2.
- Over level sandy meadow land
- 16.35 Sand wash 100 lks. wide, course N40°E.
- 18.05 Wire fence bears E. and W.
- 40.36 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. with bottle at the base, 30 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap

S 2 | S 1

1924

Chains


45.00
80.80

Wire fence bears N10°E. and S10°W.
(Proportional dist.) Intersect the reestablished closing
cor. of secs. 1 and 2, T16N., R4W. on 4th. Std. Par. N.
hereinbefore described.
Land level and rolling.
Soil sandy 1st. and 2nd. rate.
No timber.
Good grass.

From the reestablished cor. of secs. 34 and 35 on S. bdy. of
Tp. hereinbefore described.
N 0°24'W. on true line bet. secs. 34 and 35.
Ascend 40 ft. over S. slope over stony mountainous land.
through scattering oak and juniper brush
undergrowth.

5.00
10.00
33.50
40.33


Enter heavy timber and brush undergrowth, bears NE. and
SW.
Top of Divide bears NE. and SW., thence over NW. slope
Top of spur bears W.; Desc. 80 ft. over N. slope.
(Proportional dist.) Set an iron post 3 ft. long, 1 in. in
diam. 26 ins. in the ground for reestablished $\frac{1}{4}$
sec. cor., marked on brass cap



from which
A juniper 12 ins. in diam. bears S53 $\frac{1}{4}$ °E 51 lks. dist.,
marked $\frac{1}{4}$ S35 BT.
A juniper 24 ins. in diam. bears West 21 lks. dist.,
marked $\frac{1}{4}$ S34 BT.

55.00
68.00
71.70
80.66

Base of mountain; leave mountainous land and timber
bears NE. and SW.; enter rolling land.
Ravine 15 lks. wide 5 ft. deep, course NE.
Road from the Tohey Ranch to Prescott Arizona, bears
NE. and SW.
(Proportional dist.) Set an iron post 3 ft. long, 2 ins.
in diam. with marked stone at the base, 27 ins.
in the ground for reestablished cor. of secs.
26, 27, 34, and 35., marked on brass cap



from which
An oak 5 ins. in diam. bears S58 $\frac{1}{2}$ °W. 67 lks. dist.,
marked T16N., R4W., S34 BT.
No other trees available.
Land rolling and mountainous.
Soil sandy and stony 2nd. and 3rd. rate.
Timber juniper and cedar.
Undergrowth, juniper and oak brush.

40.00
79.93

Thence
S 89°55'E. on a random line bet. secs. 26 and 35.
Set temp. $\frac{1}{4}$ sec. cor.
Intersect N. and S. line at the reestablished cor. of

Chains

secs. 25, 26, 35, and 36.

Thence

N 89°55' W. on true line bet. secs. 26 and 35.

Over rolling gravelly and stony land, through scattering juniper timber and oak brush undergrowth.

22.84 Sand wash 50 lks. wide 3 ft. deep, course N.

29.74 Sand wash 80 lks. wide 4 ft. deep, course NW.

39.96 1/2 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for reestablished 1/4 sec. cor., marked on brass cap

1/4 S 26 / S 35

1924

from which

A juniper 4 ins. in diam. bears N 54 1/2° W. 119 lks. dist., marked 1/4 S 26 BT.

A juniper 10 ins. in diam. bears S 72° E. 231 lks. dist., marked 1/4 S 35 BT.

68.93 Sand wash 40 lks. wide 2 1/2 ft. deep, course NE.

69.93 Sand wash 30 lks. wide 2 ft. deep, course NE.

73.95 Road from the Tohey Ranch to Prescott Arizona, bears NE. and SW.

79.93 (Proportional dist.) The reestablished cor. of secs. 26, 27, 34, and 35.

Land rolling.

Soil gravelly and stony 2nd. and 3rd. rate.

Timber scattering juniper and oak.

Undergrowth, oak and juniper brush.

Thence

N 0°41' W. on true line bet. secs. 26 and 27.

Over rolling sandy land, through scattering juniper timber and oak brush undergrowth.

15.00 Low ridge bears NE. and SW. thence over NW. slope.

40.33 (Proportional dist.) Set an iron post 3 ft. long 1 in. in diam. 27 ins. in the ground for reestablished 1/4 sec. cor., marked on brass cap

1/4

S 27 | S 26

1924

from which

A juniper 6 ins. in diam. bears S 14 3/4° E. 64 lks. dist., marked 1/4 S 26 BT.

A juniper 20 ins. in diam. bears N 31° W. 81 lks. dist., marked 1/4 S 27 BT.

53.84 Dry ravine 5 lks. wide, course NW.

79.60 Road from Fair Oaks to Prescott Ariz. bears NW. and SE.

80.66 (Proportional dist.) Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in the ground for reestablished cor. of secs. 22, 23, 26, and 27., marked on brass cap

T16N | R4W / S22 | S23 / S27 | S26

1924

from which

Resurvey of the Subdivision lines of Township 16 North., Range 4 West. 41

Chains

A juniper 9 ins. in diam. bears N75°E. 375 lks. dist., marked T16N., R4W., S23 BT.
 A juniper 24 ins. in diam. bears S79°E. 395 lks. dist., marked T16N., R4W. S26 BT.
 A juniper 4 ins. in diam. bears S68°W. 204 lks. dist., marked T16N., R4W. S27 BT. and
 A juniper 4 ins. in diam. bears N27½°W. 182 lks. dist., marked T16N., R4W., S22 BT.
 Land rolling and hilly.
 Soil sandy and gravelly 2nd. and 3rd. rate.
 Timber, scattering juniper and oak.
 Undergrowth, oak and juniper brush.

40.00 N 89°59'E. on a random line bet. secs. 23 and 26.
 79.83 Set temp. ¼ sec. cor.
 Intersect N. and S. line at the reestablished cor. of secs. 23, 24, 25, and 26.

Thence
 S 89°59'W. on true line bet. secs. 23 and 26.
 Over rolling sandy land, through scattering, juniper timber and brush undergrowth.
 Ascend 65 ft. over NE. slope.
 22.00 Top of slope; desc. 60 ft. over W. slope
 25.30 Road from Skull Valley to Prescott Arizona, bears N. and S. Intersection of road from Fair Oaks to Prescott bears N. 80 lks. dist.
 25.50 Leave rolling land, bears N. and S.; Enter level bottom land
 34.60 Wire fence bears N43 lks. and S. about 40.00 chs.
 39.30 Wire fence bears NE. and SW.; Leave level land bears NE. and SW.; asc. 46 ft. over SE. slope over hilly land.
 39.91½ (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base, 28 ins. in the ground, for reestablished ¼ sec. cor., marked on brass cap

¼ S 23
 S 26

1924


from which
 A juniper 30 ins. in diam. bears N46½°W. 234 lks. dist., marked ¼ S23 BT.
 No other trees within limits.
 Note: From this point a deserted frame house bears S23½°W about 13.00 chs. dist.
 40.10 Road from Fair Oaks to Prescott Arizona, bears NE. and SW.
 45.00 Top of hill bears N. and SW.; Desc. about 25 ft. over W. slope
 51.18 Road from Fair Oaks to Prescott Arizona, bears NW. and SE.
 52.22 Wire fence, bears NW. and SE.
 63.02 Wire fence bears N 75 lks. dist and S. about 40.00 chs. dist.
 64.62 Junction of roads from Prescott Arizona to Fair Oaks and Tohey Ranch; Road to Tohey Ranch bears S. and road to Fair Oaks bears SW.

79.83 (Proportional dist.) The reestablished cor. of secs. 22, 23, 26, and 27.
 Land level, rolling and hilly.
 Soil sandy and stony 2nd. and 3rd. rate.
 Timber scattering juniper.
 Undergrowth, juniper and oak brush.


Thence

Resurvey of the Subdivision lines of Township 16 North., Range 4 West.

Chains
 N 0°50'W. on true line bet. secs. 22 and 23.
 Ascend gradually over W. slope over rolling land, through scattering juniper and oak brush undergrowth.
 8.82 Ranch road bears E. and W.
 22:30 Top of low ridge bears NW. and SE.; desc. about 20 ft. over NE. slope.
 40.33 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap



43.12 Old road bears NW. and SE.
 45.52 Wire fence bears E. and W.; Enter valley bears NE. and SW.
 50.30 Leave undergrowth, bears E. and W.; Enter cultivated land.
 65.12 Wire fence bears E. and W.
 79.30 Leave level valley land bears N70°E. and S70°W. thence over rolling land.
 80.66 (Proportional dist.) Set an iron post 3 ft. long, 2 ins. in diam. with marked stone at the base, 27 ins. in the ground for reestablished cor. of secs. 14, 15, 22, and 23, marked on brass cap



Land level and rolling.
 Soil sandy and gravelly loam 1st. and 2nd. rate.
 Timber scattering oak and juniper.
 Undergrowth oak brush and weeds.

Thence
 S 89°58'E. on a random line bet. secs. 14 and 23.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.91 Intersect N. and S. line at the reestablished cor. of secs. 13, 14, 23, and 24.
 Thence
 N 89°58'W. on true line bet. secs. 14 and 23.
 Over rolling gravelly land, through scattering oak brush undergrowth.
 15.00 Begin descent 23 ft. over W. slope; leave brush bears N. and S.
 28.22 Road from Skull Valley to Prescott Arizona, bears N. and S.
 30.66 Road from Edgar W Stevens' ranch to Prescott Arizona, bears N. and S.
 32.71 Road from Edgar W Stevens' ranch bears NE. and SW.
 34.41 The NE. cor. of Edgar W Stevens' house bears S. 10 lks. dist.
 35.50 Bunk house belonging to Stevens bears N. about 60 lks. dist.
 36.20 Descend 31 ft. over W. slope into valley.
 37.88 Wire fence bears N. and S.
 38.10 Foot of descent in Williamson Valley; leave rolling land enter level meadow land, bears N. and S.
 39.95 $\frac{1}{2}$ (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. with a pressed brick deposited at base, 32 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. marked on brass cap.

Chains

S 14
S 23

1924

Note; From this point the SW.cor.of Joseph Stephen's barn bears N57 $\frac{1}{2}$ °E.about 10.00 chs.dist.
 The SW.cor.of house bears N78 $\frac{1}{4}$ °E.4.25 chs.dist.
 The NW.cor.of Joseph Stephen's dwelling house ,bears S83 $\frac{1}{2}$ °E.5.00 chs.dist.
 The flag pole on water tower,bears S56°35'E. about 5.35 chs.dist.
 The NW.cor.of garage,bears S68 $\frac{1}{2}$ °E. 5.60 chs.dist.
 A frame house belonging to Joseph Stephens bears N74 $\frac{1}{2}$ °W.about 35.00 chs.dist.
 A hay barn belonging to Stephens,bears N78°20'W. about 22.00 chs:dist.

- 67.02 Meadow hay road,bears N80°W. and S80°E.
- 69.72 Wire pasture fence,bears N. and S.
- 75.00 Leave level meadow land,bears N. and S.; Ascend 23 ft. over E.slope over rolling land,through scattering oak brush,bears N. and S.
- 79.91 (Proportional dist.),The reestablished cor.of secs.14,15, 22,and 23.
 Land level and rolling.
 Soil sandy loam,1st. and 2nd. rate.
 Timber,none.
 Undergrowth,oak brush.
 Good grass.

Thence

N 0°40'W.on true line bet. secs.14 and 15.
 Ascend 25 ft. over SE.slope over rolling gravelly land, through scattering oak,timber and brush undergrowth.

- 1.50 Wire fence,bears NE. and SW.
- 5.00 Road to ranch house E.of line,bears E. and W.
- 12.00 Top of gravelly ridge,bears NE. and SW.;Descend 25 ft. over NW. slope.
- 38.10 Ranch road bears NE. and SW.
- 40.33 (Proportional dist.),Set an iron post 3 ft. long,1 in. in diam.with glass bottle deposited at base,27 ins.in the ground for reestablished $\frac{1}{4}$ sec. cor.,marked on brass cap

S15 | S14

1924

Note: From this point,the SW.cor.of frame house,belonging Joseph Stephens,bears N21°50'E.6.75 chs.dist.
 The SW.cor.of a barn belonging to Joseph Stephens,bears N 11°E. 3.56 chs.dist.

- 41.30 Wire fence,bears E. and W.
- 44.30 Ranch road,bears E. and W.
- 68.00 Sand wash 20 lks. wide,3 ft. deep,course N30°E.
- 74.24 Wire fence,bears NE. and SW.
- 76.50 Sand wash 150 lks. wide 4 ft. deep,course N40°E.
- 80.00 Leave sand wash;Enter grove of cottonwood,ash,and walnut timber,bears NE. and SW.
- 80.20 Wire fence,bears NE. and SW.along bank of wash.
- 80.66 (Proportional dist.) Set an iron post 3 ft. long,2 ins. in diam.28 ins. in the ground for reestablished cor.of secs.10,11,14,and 15.,marked on brass cap

Resurvey of the Subdivision lines of Township 16 North, Range 4 West.

Chains

T16N	R4W
S10	S11
S15	S14

19 24

from which

- An ash 10 ins. in diam., bears N87½°E.42 lks. dist., marked T16N.,R4W.,S11 BT.
- A cottonwood 5 ins. in diam. bears S28½°E.47 lks. dist. marked T16N.,R4W.,S14 BT.
- An ash 13 ins. in diam., bears S18½°W.37 lks. dist., marked T16N.,R4W.,S15 BT.
- A walnut 7 ins. in diam. bears N22½°W.97 lks. dist., marked T16N.,R4W.,S10 BT.

Note; From this point the SE.cor.of a small cemetery, bears N14°04'W. about 34 chs.dist.

Land level and rolling.
Soil, sandy and gravelly loam, 1st. and 2nd. rate.
Timber, scattering ash, cottonwood, walnut, and oak.
Undergrowth, oak brush and sunflowers.

Thence

- 40.00 N 89°47'E. on a random line bet. secs. 11 and 14.
Set temp. ¼ sec. cor.
- 80.01 Intersect N. and S. line at the reestablished cor. of secs. 11, 12, 13, and 14.

Thence

- S 89°47'W. on true line bet. secs. 11 and 14.
Over level sandy meadow land. in the Williamson Valley.
- 1.54 Slough 10 lks. wide, 4 ft. deep, course N.
- 40.00 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. with tin can deposited at base, 27 ins. in. the ground for reestablished ¼ sec. cor., marked on brass cap

¼	S 11
	S 14

1924

Note: From this point, Joseph N Marlow's house, bears N63°05'E.47.45 chs. dist.

- 43.04 A point 132 lks. S. of cor. of wire fence, bears N. and W.
- 61.84 A point 390 lks. S. of SW. cor. of School house.
- 67.95 Wire fence, bears N. 350 lks. and S. about 20.00 chs. dist.
- 69.95 Wire fence, bears N. 360 lks. and S. about 20.00 chs. dist.
- 70.15 Sand wash 60 lks. wide, 4 ft. deep, course N.
- 73.74 Wire fence, bears NE. and SW.
- 78.50 Sand wash 200 lks. wide, banks 4 ft. high, course NE.
- 79.50 Leave sand wash.; Enter level sandy land and scattering ash, cottonwood and walnut timber.
- 79.69 Wire fence along left bank of sand wash, bears NE. and SW.
- 80.01 (Proportional dist.) The reestablished cor. of secs. 10, 11, 14, and 15.

Land level.
Soil sandy loam 1st. rate.
Timber, scattering, ash, cottonwood, and walnut.
Undergrowth, slough grass and weeds.
Good grass.

Resurvey of the Subdivision lines of Township 16 north., Range 4 West.

Chains


N 0°49'W. on true line bet. secs. 10 and 11.
 Over level sandy valley land, through scattering walnut
 and cottonwood timber.

2.86 Wire fence bears E. and W.; Leave timber bears E. and W.;
 Enter cultivated land.

22.00 Wire fence bears NE. and SW.; Enter scattering sage brush
 undergrowth, Leave cultivated land bears NE. and SW.

26.00 Leave level land, bears NE. and SW.; Enter rolling land.
 slopes SE.

40.33 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in
 diam. with tin can at base 27 ins. in the ground
 for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap




1924

Note; From this point Matley's house bears S87°42'E.
 Matley's house bears N50°30'E.

43.86 Ranch road bears E. and W.

63.10 Wire fence bears E. and W.; joins N. and S. fence line 188
 lks W. of this point.

80.66 (Proportional dist.) Set an iron post 3 ft. long, 2 ins. in
 diam. with marked stone at base, 27 ins. in the
 ground for reestablished cor. of secs. 2, 3, 10, and
 11, marked on brass cap



1924

Land rolling and level.
 Soil sandy loam. 1st. and 2nd. rate.
 Timber scattering walnut and cottonwood.
 Undergrowth, scattering sage brush.
 Good grass.

Thence
 N 89°52'E. on a random line bet. secs. 2 and 11.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.00 Intersect N. and S. line at the reestablished cor. of secs.
 1, 2, 11, and 12.

Thence
 S 89°52'W. on true line bet. secs. 2 and 11.
 Over level meadow land.

1.00 Wire fence bears N. and S.

8.75 Wire fence bears N and S.

23.65 Wire fence, bears N and S.

25.73 Sand wash 80 lks. wide 2 ft. deep, course N.

27.95 Wire fence, bears NW. and SE.

37.25 Ranch road bears N. and S.

38.85 Ranch road bears NE. and SW.

40.00 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in
 diam. with marked stone at the base, 27 ins. in the
 ground for reestablished $\frac{1}{4}$ sec. cor., marked on
 brass cap

Chains

$$\frac{1}{4} \frac{S 2}{S 11}$$

1924

Note; From this point Matley's house bears $S10^{\circ}37'W$.
From same point Matley's house bears $N64^{\circ}18'E$

- 42.17 Wire fence bears N. and S.; Fall 54 lks. S. of intersection of fence line bears W.
42.50 Leave level land bears NE. and SW.; Enter rolling land, slopes SE. ascend gradually over SE. slope.
80.00 (Proportional dist.) The reestablished cor. of secs. 2, 3, 10, and 11.
Land rolling and level.
Soil sandy loam 1st. and 2nd. rate.
No timber
Good grass.

Thence

- N $0^{\circ}49'W$. on true line bet. secs. 2 and 3.
Ascend gradually over SE. slope over rolling sandy land.
.90 Wire fence bears E. and W.; joins N. and S. fence line 1.00 chain W. of this point.
3.60 Road from James W Stewart's ranch to Simmons Arizona, bears NE. and SW.
31.70 Top of sandy ridge bears E. and W.; descend gradually over N. slope.
40.33 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base, 27 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap

$$\frac{1}{4}$$


$$S3 \quad | \quad S2$$

1924


- 52.90 Arroyo 15 lks. wide 3 ft. deep, course N from SW.
62.40 Same arroyo 10 lks. wide 3 ft. deep, course NE.
80.74 (Proportional dist.) Intersect the reestablished closing cor. of secs. 2, and 3 T16N., R4W. hereinbefore described.
Land rolling.
Soil sandy 2nd. rate.
No timber.

- From the reestablished cor. of secs. 33 and 34 on S. bdy. of Tp. hereinbefore described
N $0^{\circ}26'W$. on true line bet. secs. 33 and 34.
Descend 28 ft. over N. slope over stony, mountainous, land through heavy cedar and juniper timber and brush undergrowth.
7.77 Dry ravine 50 lks. wide, course W.; Asc. 42 ft. over S. slope.
14.40 Top of ridge bears NW. and SE.; Desc. 36 ft. over NW. slope
18.46 Dry ravine 50 lks. wide, banks 1 ft. high, course SW.; Asc. 34 ft. over SE. slope.
24.00 Top of spur bears SW.; Desc. 34 ft. over NW. slope.
40.23 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap

Chains



- from which
- A juniper 40 ins. in diam. bears S38°E. 32 lks. dist., marked 1/4 S34 BT.
- A juniper 12 ins. in diam. bears S58 1/4°W. 25 lks. dist., marked 1/4 S33 BT.
- 43.49 Wire fence bears E. and W. in bed of sand wash 10 lks. wide course W.; Asc. 22 ft. over S. slope.
- 48.90 Top of ascent on spur bears W.; Desc. about 15 ft. over N. slope.
- 55.48 Dry ravine 15 lks. wide, course W.; Asc. 46 ft. over S. slope
- 60.95 Top of ridge bears E. and W.; Desc. 52 ft. over N. slope
- 73.72 Dry ravine 10 lks. wide 2 ft. deep, course NE.
- 80.46 (Proportional dist.) Set an iron post 3 ft. long, 2 ins. in diam. 20 ins. in the ground to bedrock supported in a mound of stone for reestablished cor. of secs. 27, 28, 33, and 34, marked on brass cap




1924

- from which
- A juniper 3 ins. in diam. bears N30 1/4°E. 78 lks. dist., marked BT
- A juniper 12 ins. in diam. bears S50 1/4°E. 211 lks. dist. marked T16N., R4W., S34 BT.
- A juniper 10 ins. in diam. bears S79 1/2°W. 96 lks. dist., marked T16N., R4W., S33 BT.
- A juniper 6 ins. in diam. bears N33°W. 230 lks. dist., marked T16N., R4W., S28 BT.

Land mountainous.
 Soil stony 3 rd. rate.
 Timber cedar and juniper.
 Undergrowth cedar and juniper brush.

- 40.00 East on a random line bet. secs. 27 and 34.
- 79.98 Set temp. 1/4 sec. cor.
Intersect N. and S. line at the reestablished cor. of secs. 26, 27, 34, and 35.
- Thence
- West on true line bet. secs. 27 and 34.
- Ascend 157 ft. over SE. slope of spur over stony mountainous land, through scattering juniper and oak timber and manzanita and oak brush undergrowth.
- 15.45 Top of granite spur bears NE.; Desc. 135 ft. over NW. slope.
- 35.37 Dry ravine 80 lks. wide, course N.; Asc. 129 ft. over W. slope
- 39.99 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. 24 ins. in the ground to bedrock, supported in a mound of stone for reestablished 1/4 sec. cor. marked on brass cap




1924

48 Resurvey of the Subdivision lines of Township 16 North., Range 4 West.


Chains

from which
 An oak 4 ins. in diam. bears N81 $\frac{1}{2}$ °E. 91 lks. dist., marked $\frac{1}{4}$ S27 BT.
 A juniper 15 ins. in diam. bears S21°E. 230 lks. dist., marked $\frac{1}{4}$ S34 BT.
 78.38 Wash 25 lks. wide 2 ft. deep, course N.
 79.98 (Proportional dist.) The reestablished cor. of secs. 27, 28, 33, and 34.
 Land rolling and mountainous.
 Soil sandy and stony 3 rd. rate.
 Timber, scattering cedar, oak, and juniper.
 Undergrowth, manzanita and oak brush.

Thence
 N 0°34'W. on true line bet. secs. 27 and 28.
 Over rolling, stony land, slopes NE. through cedar, oak, and juniper timber and brush undergrowth.
 21.50 Foot of slope; Enter flat bears NE. and W.
 25.44 Dry sand wash 200 lks. wide, banks 3 ft. high, course NE.
 37.40 Road from Fair Oaks to Prescott Arizona, bears NE. and SW.
 40.23 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. 12 ins. in the ground to bedrock, supported in a mound of stone for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap



from which
 A juniper 40 ins. in diam. bears S16°E. 150 lks. dist. marked $\frac{1}{4}$ S27 BT.
 A juniper 40 ins. in diam. bears N59 $\frac{3}{4}$ °W. 351 lks. dist., marked $\frac{1}{4}$ S28 BT.
 60.00 Leave flat bears NE. and S10°W.; Ascend 83 ft. over SE. slope.
 61.54 Dry ravine 20 lks. wide 3 ft. deep, course SE.
 65.84 Dry ravine 25 lks. wide 4 ft. deep, course SW.
 73.60 Top of ridge bears E. and W.; Desc. gradually over N. slope.
 80.46 (Proportional dist.) Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in the ground for reestablished cor. of secs. 21, 22, 27, and 28., marked on brass cap




1924

from which,
 A juniper 18 ins. in diam. bears N59 $\frac{1}{2}$ °E. 94 lks. dist., marked T16N., R4W., S22 BT.
 A juniper 40 ins. in diam. bears S70 $\frac{1}{2}$ °E. 72 lks. dist., marked T16N., R4W., S27 BT.
 A juniper 14 ins. in diam. bears S11°W. 5 lks. dist., marked T16N., R4W., S28 BT.
 A juniper 14 ins. in diam. bears N53°W. 11 lks. dist., marked T16N., R4W., S21 BT.
 Land level, rolling, and hilly.
 Soil sandy and stony 2nd. and 3rd. rate.
 Timber scattering oak, cedar, and juniper.
 Undergrowth, oak and juniper brush.

Resurvey of the Subdivision lines of Township 16 North., Range 4 West

Chains

40.00 N 89°54'E. on a random line bet. secs. 22 and 27
 Set temp. $\frac{1}{4}$ sec. cor.
 79.83 Intersect N. and S. line at the reestablished cor. of secs. 22, 23, 26, and 27.
 Thence
 S 89°54'W. on true line bet. secs. 22 and 27.
 Over rolling sandy land, through scattering cedar and juniper timber and brush undergrowth.
 2.35 Road from Fair Oaks to Prescott Arizona bears NW. and SE.
 17.94 Same road bears N80°E. and S80°W.
 22.84 Road to ranch bears NW. and SE.
 29.30 Road to ranch bears N. and S.; Leave rolling land, bears NW. and SW.; Asc. 19 ft. over E. slope.
 32.40 Top of ridge, thence over nearly level land along top same.
 32.75 A frame house bears N. about 225 lks. dist.
 39.03 Wire fence bears NW. and SE.
 39.91 $\frac{1}{2}$ (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap




1924

from which,

A juniper 18 ins. in diam. bears N14 $\frac{1}{2}$ °W. 28 lks. dist., marked $\frac{1}{4}$ S22 BT.
 A juniper 15 ins. in diam. bears S2 $\frac{1}{2}$ °E. 26 lks. dist., marked $\frac{1}{4}$ S27 BT.
 43.00 Descend 16 ft. over SW. slope.
 47.83 Wire fence bears NE. and SW.; Enter level cultivated field bears NE. and SW.
 50.54 Dry sand wash 70 lks. wide, banks 4 ft. high, course NW.
 53.34 Wire fence bears NW. and SE.; Enter corn field, bears NW. and SE.
 59.14 wire fence bears NW. and SE.; Leave cultivated land, bears NW. and SE.; Enter hilly land and juniper timber and brush undergrowth; Ascend 86 ft. over NE. slope.
 69.61 Ravine 15 lks. wide 1 ft. deep, course S85°E.
 74.56 Old wood road, bears NE. and SW.
 79.83 (Proportional dist.) The reestablished cor. of secs. 21, 22, 27, and 28.
 Land level rolling, and hilly.
 Soil sandy and stony 2nd. and 3rd. rate.
 Timber oak, cedar, and juniper.
 Undergrowth, oak and juniper brush.

Thence

N 0°58'W. on true line bet. secs. 21 and 22.
 Descend gradually over N. slope over rolling stony land, through cedar and juniper timber and brush undergrowth.
 .73 Wash 10 lks. wide 1 ft. deep, course NE.
 16.08 Sand wash 40 lks. wide 3 ft. deep, course N60°E.
 40.23 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. marked on brass cap



1924

Chains

from which,

- A juniper 10 ins. in diam. bears $S49\frac{3}{4}^{\circ}E$. 57 lks. dist.,
marked $\frac{1}{4}$ S22 BT.
A juniper 26 ins. in diam. bears $S38^{\circ}W$. 191 lks. dist.,
marked $\frac{1}{4}$ S21 BT.
41.78 Dry ravine 20 lks. wide 3 ft. deep, course NE.
63.68 Wire fence bears E. and W.
67.08 Old road bears NE. and W.
80.46 (Proportional dist.) Set an iron post 3 ft. long, 2 ins. in
diam. 27 ins. in the ground for reestablished cor.
of secs. 15, 16, 21, and 22, marked on brass cap

T16N	R4W
S16	S15
S21	S22

1924

from which,

- A juniper 21 ins. in diam. bears $N79\frac{3}{4}^{\circ}E$. 79 lks. dist.,
marked T16N., R4W., S15 BT.
A juniper 15 ins. in diam. bears $S58\frac{1}{4}^{\circ}E$. 75 lks. dist.,
marked T16N., R4W., S22 BT.
A juniper 18 ins. in diam. bears $S39^{\circ}W$. 75 lks. dist.,
marked T16N., R4W., S21 BT.
A juniper 22 ins. in diam. bears $N59\frac{1}{2}^{\circ}W$. 99 lks. dist.,
marked T16N., R4W., S16 BT.
Land rolling.
Soil sandy and stony 2nd. and 3rd. rate.
Timber oak, cedar, and juniper.
Undergrowth, oak and juniper brush.

- 40.00 N $89^{\circ}48'E$ on a random line bet. secs. 15 and 22.
79.78 Set temp. $\frac{1}{4}$ sec. cor.
Intersect N. and S. line at the reestablished cor. of
secs. 14, 15, 22, and 23.
Thence
S $89^{\circ}48'W$ on true line bet. secs. 15 and 22.
Ascend 23 ft. over SE. slope over rolling sandy land,
through scattering oak timber and brush under-
growth.
13.00 Top of sand ridge bears NE. and SW.; Desc. about 25 ft.
over NW. slope.
13.73 Ranch road bears NE. and SW.
28.95 Wire fence bears N. and S. at foot of descent.; Leave
rolling land bears N. and S.; Enter level bottom
land.
32.00 Leave level land, bears NW. and S.; Enter rolling land.
Asc. about 15 ft. over SE. slope.
32.09 Wire fence bears N. and S.
33.23 Old well bears N. 35 lks. dist.
34.53 Vacant frame house belonging to Joseph Stevens, bears
N. 210 lks. dist.
36.53 Chicken yard fence bears $N60^{\circ}W$. and $S60^{\circ}E$.
38.00 Top of hill bears N. and S.; desc. over W. slope.
39.89 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in
diam. with marked stone at the base, 27 ins. in
the ground for reestablished $\frac{1}{4}$ sec. cor., marked
on brass cap

$\frac{1}{4}$	S 15
	S 22

1924


Chains

Note; From this point a frame dwelling house, belonging to Joseph Stevens, bears N54 $\frac{1}{2}$ °W. about 30.00 chs. dist. Foot of descent in draw, course NW.; Ascend 48 ft. over NE. slope.
 Top of ridge bears N. and S.; Desc. 30 ft. over W. slope. (Proportional dist.) The reestablished cor. of secs. 15, 16, 21, and 22.
 Land level, rolling, and hilly.
 Soil sandy and stony 2nd. and 3rd. rate.
 Timber scattering oak and juniper.
 Undergrowth, oak and juniper brush.


Thence

N 0°50'W. on true line bet. secs. 15 and 16.
 Over rolling sandy land, through scattering oak and juniper timber and brush undergrowth.

- 17.72 Wire fence bears NE. and SW.
- 24.22 Old road bears NE. and SW.
- 28.52 Wire fence bears NE. and SW. along bank of sand wash.
- 28.94 Wire fence bears N70°W. and S70°E.
- 30.58 Dry sand wash 200 lks. wide, banks 4 ft. high, course N50°E.; Leave timber and undergrowth, bears NE. and SW.
- 32.00 Enter undergrowth of sunflowers and greasewood brush, bears NE. and SW.
- 38.60 Wire fence bears N70°E. and S70°W.; Leave undergrowth bears N70°E. and S70°W.; Enter cornfield.
- 40.23 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base, 29 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap



- 57.32 Wire fence bears E. and W.; Leave cornfield bears E. and W.; Enter dense sunflower undergrowth.
- 60.00 A dwelling house belonging to James Stewart bears W. about 5.00 chs. dist.
- 62.72 Wire fence bears N75°E. and S75°W.; Leave sunflower undergrowth, bears NE. and SW.; Enter prairie land.
- 63.92 Ranch road bears E. and W.
- 64.50 Leave level valley land, bears N80°E. and S80°W.; Enter rolling land; Ascend 29 ft. over SE. slope.
- 80.46 (Proportional dist.) Set an iron post 3 ft. long, 2 ins. in diam. with glass bottle at the base, 30 ins. in the ground for reestablished cor. of secs. 9, 10, 15, and 16, marked on brass cap



Land level and rolling.
 Soil sandy loam 1st. and 2nd. rate.
 Timber scattering oak and juniper.
 Undergrowth, sunflower weeds, oak, and juniper brush.

chains

40.00 N 89°31'E. on a random line bet. secs.10 and 15.
 79.98 Set temp $\frac{1}{4}$ sec. cor.
 Intersect N. and S. line at the reestablished cor. of secs.
 10, 11, 14, and 15.
 Thence
 S 89°31'W. on true line bet. secs.10 and 15.
 Over level sandy bottom land, through scattering walnut
 and cottonwood timber.
 2.00 Leave timber bears NE. and SW.
 4.60 Old wire fence bears N. and S.; Enter cultivated land,
 bears N2.00 chs. and S. about 30.00 chs. dist.
 12.30 Wire fence bears N2.00 chs. and S. about 40.00 chs. dist.;
 Leave cultivated land, bears N. and S.; Enter meadow
 land.
 28.30 Wire fence bears N about 2.00 chs. and S. about 20.00 chs.
 dist.; Leave level meadow land, bears N. and S.;
 Enter rolling sandy land, slopes SE.; Asc. gradually
 over SE. slope.
 38.30 Road from James Stewart's ranch to Simmons Arizona, bears
 NW. and SE.
 39.99 (Proportional dist.) Set an iron post 3 ft. long 1 in. in
 diam. with marked stone at the base, 27 ins. in the
 ground for reestablished $\frac{1}{4}$ sec. cor., marked on
 brass cap

$$\frac{\frac{1}{4} S 10}{S 15}$$

1924

Note; From this point James W. Stewart's dwelling house
bears S63 $\frac{1}{4}$ °E.

45.50 Wire fence bears North 1.80 chs., thence N33 $\frac{3}{4}$ °W. and South.
 48.60 Old ranch road bears N. and S.
 64.30 Old road to Simmons Arizona, bears NE. and SW.
 68.80 Old ranch road bears NW. and SE.
 79.98 (Proportional dist.) The reestablished cor. of secs. 9, 10, 15,
 and 16.
 Land level and rolling.
 Soil sandy loam, 1st. and 2nd. rate.
 Timber, scattering walnut and cottonwood.
 Undergrowth weeds and Johnson grass.
 Good grass.

Thence
 N 0°50'W. on true line bet. secs. 9 and 10.
 Over rolling sandy land, through scattering juniper timber
 and brush.

7.26 Old road bears E. and W.
 40.23 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in
 diam. 27 ins. in the ground for reestablished $\frac{1}{4}$
 sec. cor., marked on brass cap

$$\frac{\frac{1}{4}}{S9 \quad | \quad S10}$$

1924

from which,

A juniper 20 ins. in diam. bears S28 $\frac{1}{4}$ °E. 233 lks. dist.,
 marked $\frac{1}{4}$ S10 BT.
 A juniper 3 $\frac{1}{2}$ ins. in diam. bears S54 $\frac{1}{2}$ °W. 100 lks. dist.,
 marked $\frac{1}{4}$ S9 BT.

50.50 Old road bears NW. and SE.
 54.50 Wire fence bears N33 $\frac{3}{4}$ °W and S33 $\frac{3}{4}$ °E

Resurvey of the Subdivision lines of Township 16 North., Range 4 West.

Chains

80.46 (Proportional dist.) Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the ground for reestablished cor. of secs. 3, 4, 9, and 10, marked on brass cap

T16N	R4W
S 4	S 3
S 9	S 10

1924

from which,
 A juniper 15 ins. in diam. bears S74½°E. 80 lks. dist., marked T 16 N., R 4 W., S 10 BT.
 No other bearing trees available.; Deposit stone marked with a cross (x) at base of post.
 Land rolling.
 Soil sandy 2nd. rate.
 Timber, scattering juniper.
 Undergrowth, sagebrush.

40.00 N 89°21'E. (computed bearing) on a random line bet. secs. 3 and 10 .

79.95 Set temp. sec. cor. (Proportional dist.), Intersect N. and S. line at the reestablished cor. of secs. 2, 3, 10, and 11.

Thence S 89°21'W. on true line bet. secs. 3 and 10. Over rolling sandy land.

1.40 Wire fence bears N. and S.

1.70 Road from James W. Stewart's ranch to Simmons Arizona, bears NE. and S.

39.97½ (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base, 27 ins. in the ground for reestablished ¼ sec. cor., marked on brass cap

¼ S 3
S 10

1924

74.30 Old road bears N75°W. and S75°E.

79.95 (Proportional dist.) The reestablished cor. of secs. 3, 4, 9, and 10.

Land rolling.
 Soil sandy, 2nd. rate.
 Timber, none.
 Undergrowth, none.
 Good grass.

N 0°58'W. on true line bet. secs. 3 and 4. Over rolling sandy land, slopes N.

3.00 Old road bears E. and W.

3.36 Wire fence, bears E. 80. chs. and W. 150 lks. dist.

39.30 Gulch 10 lks. wide 2 ft. deep, course N80°E.

40.23 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for reestablished ½ sec. cor., marked on brass cap

S 4	S 3
-----	-----

1924

54 Resurvey of the Subdivision lines of Township 16 North, Range 4 West


Chains

from which,

- A juniper 18 ins. in diam. bears $N44\frac{1}{2}^{\circ}E$. 246 lks. dist., marked $\frac{1}{4}$ S 3 BT.
- A juniper 13 ins. in diam. bears $N61^{\circ}W$. 220 lks. dist., marked $\frac{1}{4}$ S 4 BT.
- 60.70 Top of sand ridge bears NE. and SW.; Descend about 12 ft. over NW. slope.
- 62.55 Wire fence bears N. and S.
- 80.56 Wire fence, bears E. 43 lks. and W. about 80 chs. dist.
- 80.58 (Proportional dist.) Intersect the reestablished closing cor. of secs. 3 and 4, T16N., R4W. on the 4th. Std. Par. N., hereinbefore described.


Land rolling.
Soil sandy 2nd. rate.
Timber, scattering juniper.
Undergrowth, sagebrush.
Good grass.

- From the reestablished cor. of secs. 32 and 33 on S. bdy. of Tp. hereinbefore described,
 $N 0^{\circ}33'W$. (Computed bearing) on true line bet. secs. 32 and 33.
- Ascend 48 ft. over S. slope over stony mountainous land through oak cedar and juniper timber and brush undergrowth
- 6.40 Descend 80 ft. over N. slope covered with granite boulders.
- 17.35 Foot of descent at base of large granite boulder; Ascend 15 ft. over west end of same.
- 20.05 Top of boulder; Descend 89 ft. over N. slope
- 34.70 Ravine 40 lks. wide, course NE.; Ascend 25 ft. over SE. slope.
- 40.20 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. 6 ins. in the ground to bedrock, supported in a mound of stone, for reestablished $\frac{1}{4}$ sec. cor. marked on brass cap



from which

- A juniper 12 ins. in diam. bears $N37^{\circ}E$. 35 lks. dist., marked $\frac{1}{4}$ S33 BT.
- A juniper 7 ins. in diam. bears $N57^{\circ}W$. 6 lks. dist., marked $\frac{1}{4}$ S32 BT.
- 52.10 Wire fence, bears $N61\frac{1}{2}^{\circ}W$. and $S50^{\circ}E$.
- 54.00 Point of spur bears NE.; Descend 37 ft. over NW. slope.
- 61.90 Ravine 6 lks. wide, course NE.; Ascend 43 ft. over SE. slope
- 62.50 Road from Fair Oaks to Prescott Arizona, bears NE. and SW.
- 63.30 Sand wash 30 lks. wide, banks 2 ft. high, course NE.; Ascend 120 ft. over SE. slope.
- 80.40 (Proportional dist.) Set an iron post 3 ft. long, 2 ins. in diam. 26 ins. in the ground for reestablished cor. of secs. 28, 29, 32, and 33, marked on brass cap.




- A juniper 9 ins. in diam. bears $N15\frac{1}{2}^{\circ}E$. 61 lks. dist., marked T16N., R4W., S28 BT
- A juniper 20 ins. in diam. bears $S33^{\circ}E$. 161 lks. dist., marked T16N., R4W., S33 BT

Chains

A juniper 10 ins. in diam. bears S48 $\frac{1}{2}$ °W. 24 lks. dist.,
marked T16N., R4W., S32 BT.
A juniper 14 ins. in diam. bears N85°W. 77 lks. dist.,
marked T16N., R4W. S29 BT.
Land mountainous.
Soil stony 3 rd. and 4th. rate.
Timber oak, cedar, and juniper.
Undergrowth, oak and juniper brush.


40.00 S 89°53'E. on a random line bet. secs. 28 and 33.
Set temp. $\frac{1}{4}$ sec. cor.
80.03 (Proportional dist.) Intersect N. and S. line at the
reestablished cor. of secs. 27, 28, 33, and 34.
Thence
N 89°53'W. on true line bet. secs. 28 and 33.
Ascend E. slope 38 ft. over rolling stony land, through
scattering oak and juniper timber and brush
undergrowth.
5.90 Top of spur bears N. desc. 12 ft. over W. slope.
12.90 Ravine 8 lks. wide, course N20°E.; Ascend 57 ft. over E.
slope.
29.00 Top of spur bears NE.; Desc. 95 ft. over NW. slope.
40.01 $\frac{1}{2}$ (Proportional dist.) Set an iron post 3 ft. long, 1 in. in
diam. 24 ins. in the ground to bedrock, supported
in a mound of stone, with marked stone at the base
for reestablished $\frac{1}{4}$ sec. cor., marked on brass
cap



1924

No trees within limits.
49.28 Sand wash 150 lks. wide, banks 3 $\frac{1}{2}$ ft. high, course N.
61.61 Sand wash 90 lks. wide, banks 2 ft. high, course N50°E.
Ascend 143 ft. over SE. slope.
63.00 Road from Fair Oaks to Prescott Arizona, bears NE. and SW.
80.03 (Proportional dist.) The reestablished cor. of secs. 28, 29,
32, and 33.
Land rolling and mountainous.
Soil stony 3rd. and 4th. rate.
Timber scattering oak and juniper.
Undergrowth, oak, manzanita, and juniper brush.

Thence
N 0°44'W. on true line bet. secs. 28 and 29.
Descend 23 ft. over NW. slope, over stony hilly land,
through oak and juniper timber and brush under-
growth.
19.20 Wash 20 lks. wide, 2 ft. deep, course NE.; Ascend 40 ft.
25.00 Descend 80 ft. to
40.20 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in
diam. 27 ins. in the ground for reestablished $\frac{1}{4}$
sec. cor. marked on brass cap



1924

from which,

Chains
 A juniper 6 ins. in diam. bears $S30\frac{1}{2}^{\circ}E$. 67 lks. dist.,
 marked $\frac{1}{4}$ S28 BT.
 A juniper $5\frac{1}{2}$ ins. in diam. bears $S54\frac{1}{4}^{\circ}W$. 12 lks. dist.,
 marked $\frac{1}{4}$ S29 BT.
 Ascend 40 ft. over S. slope.
 47.60 Top of spur bears E.; Desc. 45 ft. over N. slope.
 48.00 Old road bears NE. and SW.
 54.60 Gulch 6 lks. wide, course NW.
 63.20 Arroyo 10 lks. wide course W.; Asc. 30 ft.
 74.00 Top of spur bears NW.; Desc. over NE. slope.
 80.40 (Proportional dist.) Set an iron post 3 ft. long 2 ins. in
 diam. 26 ins. in the ground for reestablished
 cor. of secs. 20, 21, 28, and 29, marked on brass
 cap

T16N	R4W
S20	S21
S29	S28

1924

from which,
 A juniper 5 ins. in diam. bears $N50^{\circ}E$. 135 lks. dist.;
 marked T16N., R4W., S21 BT.
 A juniper 5 ins. in diam. bears $S67\frac{3}{4}^{\circ}E$. 113 lks. dist.,
 marked T16N., R4W., S28 BT.
 A juniper 9 ins. in diam. bears $S60^{\circ}W$. 194 lks. dist.;
 marked T16N., R4W., S29 BT.
 A juniper 20 ins. in diam. bears $N40\frac{3}{4}^{\circ}W$. 128 lks. dist.,
 marked T16N., R4W., S20 BT.
 Land hilly and mountainous.
 Soil stony 3 rd. rate.
 Timber, oak, cedar, and juniper.
 Undergrowth, oak, and juniper brush.

40.00 S $89^{\circ}50'E$ on a random line bet. secs. 21 and 28.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.93 (Proportional dist.) Intersect N. and S. line at the cor.
 reestablished cor. of secs. 21, 22, 27, and 28.
 Thence
 N $89^{\circ}50'W$ on true line bet. secs. 21 and 28.
 Over rolling land, through heavy juniper timber and brush
 undergrowth.
 5.83 Old wood road, bears NE. and SW.
 15.81 Dry ravine 25 lks. wide 3 ft. deep, course NE.
 39.96 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in
 diam. 27 ins. in the ground for reestablished
 $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 21
S 28


1924

from which,
 A juniper 17 ins. in diam. bears $N26\frac{3}{4}^{\circ}W$. 37 lks. dist.,
 marked $\frac{1}{4}$ S21 BT.
 A juniper 5 ins. in diam. bears $S52\frac{1}{4}^{\circ}W$. 67 lks. dist.,
 marked $\frac{1}{4}$ S28 BT.
 55.96 Dry sand wash 25 lks. wide 2 ft. deep, course N.
 64.95 Dry sand wash 17 lks. wide 1 ft. deep, course NE.
 77.25 Dry ravine 15 lks. wide 1 ft. deep, course N.
 79.93 (Proportional dist.) The reestablished cor. of secs. 20, 21,
 28, and 29.
 Land rolling.
 Soil sandy and stony 2nd. and 3rd. rate.
 Timber oak, cedar, and juniper.
 Undergrowth oak and juniper brush.


Resurvey of the Subdivision lines of Township 16 North., Range 4 West. 57

Chains

Thence
 N 1°02'W. on true line bet. secs. 20 and 21.
 Over rolling stony land, slopes NW., through heavy juniper
 timber and brush undergrowth.
 34.20 Corner of wire fence bears N. and SW. thence along W. side
 of fence.
 36.90 Dry ravine 10 lks. wide, course NW.
 40.20 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in
 diam. 26 ins. in the ground for reestablished
 1/4 sec. cor., marked on brass cap



from which,
 A juniper 6 ins. in diam. bears S53 1/2°E. 55 lks. dist.,
 marked 1/4 S21 BT.
 A juniper 30 ins. in diam. bears S84°W. 58 lks. dist.,
 marked 1/4 S20 BT.
 47.80 Wash 30 lks. wide, course NE. thence over E. slope.
 62.20 Same wash 30 lks. wide, course NW.
 68.20 Same wash, 40 lks. wide, course NE.
 77.00 Wire fence bears E. and W.
 78.90 Road from Williamson Valley to Fair Oaks, bears E. and W.
 80.41 (Proportional dist.) Set an iron post 3 ft. long, 2 ins.
 in diam. 27 ins. in the ground for reestablished
 cor. of secs. 16, 17, 20, and 21, marked on brass cap



from which,
 A juniper 12 ins. in diam. bears N58 1/2°E. 77 lks. dist.,
 marked T16N., R4W., S16 BT.
 A juniper 40 ins. in diam. bears S74 1/2°E. 164 lks. dist.,
 marked T16N., R4W., S21 BT.
 A juniper 18 ins. in diam. bears N38 1/2°W. 105 lks. dist.,
 marked T16N., R4W., S17 BT.
 No other trees within limits.; Deposit a marked stone
 at base, of post.
 Land rolling and hilly.
 Soil stony 2nd. and 3rd. rate.
 Timber cedar, oak, and juniper.
 Undergrowth, oak and juniper brush.

S 89°55'E. on a random line bet. secs. 16 and 21.
 40.00 Set temp. 1/4 sec. cor.
 79.94 (Proportional dist.) Intersect N. and S. line at the re-
 established cor. of secs. 15, 16, 21, and 22.

Thence
 N 89°55'W. on true line bet. secs. 16 and 21
 Over rolling stony land, through juniper timber and brush.
 descend about 8 ft. over W. slope.
 4.00 Foot of descent; enter level meadow land bears NE. and Sw.
 4.66 Wire fence bears N 130 lks. dist. and S. about 40.00 chs.
 27.60 Wire fence bears N82°E. and S82°W. Enter old cultivated
 field.
 39.97 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in
 diam. with marked stone at the base, 28 ins. in

58 Resurvey of the Subdivision lines of Township 16 North., Range 4 West.

Chains	
	the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4} \begin{array}{l} S 16 \\ S 21 \end{array}$
	1924
	No trees within limits.
50.00	Leave level land, bears NW. and SE.; Enter hilly land.: Asc. 42 ft. over NE. slope.
62.50	Top of ridge bears N. and S.; Desc. 58 ft. over SW. slope.
63.28	Road from Williamson Valley to Fair Oaks, bears NE. and SW.
71.50	Foot of descent in dry sand wash in bend, course N.; Asc. 29 ft. over NE. slope.
79.94	(Proportional dist.) The reestablished cor. of secs. 16, 17, 20, and 21. Land level rolling, and hilly. Soil sandy 1st. 2nd., and 3rd. rate. Timber juniper and oak. Undergrowth, oak and juniper brush.
Thence	
	N $0^{\circ}48'$ W. on true line bet. secs. 16 and 17.
	Descend 23 ft. over NE. slope, through scattering juniper timber and brush undergrowth.
19.80	Dry sand wash 100 lks. wide, course E.; Asc. 60 ft. over S. slope.
14.80	Top of spur bears E.; Desc. 50 ft. over N. slope.
22.80	Foot of descent in sand wash 200 lks. wide, course $S70^{\circ}E$. leave rolling land, bears NW. and SE.; Enter level bottom land
37.20	Leave level bottom land, bears NW. and SE.; Enter rolling land and scattering juniper timber.; Asc. 29 ft. over SE. slope.
40.20	(Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4} \begin{array}{l} S 17 \\ S 16 \end{array}$
	1924
	from which,
	A juniper 14 ins. in diam. bears $N40^{\circ}E$. 223 lks. dist., marked $\frac{1}{4}$ S16 BT.
	A juniper 15 ins. in diam. bears $S40^{\circ}W$. 46 lks. dist., marked $\frac{1}{4}$ S17 BT.
45.00	Descend 30 ft. over NW. slope.
45.30	Dry sand wash 200 lks. wide, course SW.; Leave timber bears NE. and SW.; Enter level bottom land.
51.20	Leave level valley land, bears NE. and SW. over rolling rolling land.
56.00	Same sand wash 250 lks. wide, course SE.; Leave rolling land bears NW. and SE.; Enter level valley land.
65.80	Leave level valley bears NW. and SE.; Enter rolling land Ascend 23 ft. over SW. slope, through scattering cedar and juniper timber.
75.30	Wire fence bears E. and W.
80.40	(Proportional dist.) Set an iron post 3 ft. long, 2 ins. in diam. 30 ins. in the ground with marked stone at the Base for reestablished cor. of secs. 8, 9, 16, and 17, marked on brass cap

Chains

T16N	R4W
S8	S9
S17	S16

1924

from which,
 A juniper 24 ins. in diam. bears N88°E.78 lks. dist.,
 marked T16N.,R4W.,S9 BT.
 A juniper 12 ins. in diam. bears S12°E.111 lks. dist.,
 marked T16N.,R4W.,S16 BT.
 No other trees within limits.
 Land level and rolling.
 Soil sandy and stony 2nd. and 3rd. rate.
 Timber cedar and scattering oak.
 Undergrowth, oak and juniper brush.

40.00 N 89°50'E. on a random line bet. secs. 9 and 16.
 80.06 Set temp. $\frac{1}{4}$ sec. cor.
 (Proportional dist.) Intersect N. and S. line at the
 reestablished cor. of secs. 9, 10, 15, and 16.
 Thence
 S 89°50'W. on true line bet. secs. 9 and 16.
 Over rolling sandy land, through scattering juniper timber.
 2.15 Ranch road bears N. and S.
 3.15 Wire fence bears N 1.00 ch. and S. about 40 60 chs. dist.
 3.67 Stone set for cor. of secs. 9, 10, 15, and 16 by private
 Surveyors, bears N. 2.10 chs. dist.; Destroy all evi-
 dence of this cor.
 12.40 Ravine course S.; Asc. 39 ft. over E. slope.
 20.15 Wire fence bears N70°E. and S70°W.
 20.25 Top of ridge bears N. and S.; Descend w. slope about 25 ft.
 38.00 Ascend 36 ft. over E. slope.
 40.03 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in
 diam. 27 ins. in the ground for reestablished $\frac{1}{4}$
 sec. cor. marked on brass cap

$\frac{1}{4}$	S 9
	S 16

1924

from which,
 A juniper 9 ins. in diam. bears N51 $\frac{1}{4}$ °W. 56 lks. dist.,
 marked $\frac{1}{4}$ S9 BT.
 A juniper 36 ins. in diam. bears S89°W. 93 lks. dist.,
 marked $\frac{1}{4}$ S16 BT.
 45.25 Top of ridge bears N. and S.; desc. over SW. slope.
 80.06 (Proportional dist.) The reestablished cor. of secs. 8, 9, 16,
 and 17.
 Land rolling.
 Soil sandy and gravelly. 2nd. and 3rd. rate.
 Timber scattering juniper.
 Undergrowth juniper brush.

Thence
 N 0°52'W. on true line bet. secs. 8 and 9.
 Over rolling sandy land through scattering juniper timber
 and brush undergrowth.
 11.70 Road bears E. and W.


60 Resurvey of the Subdivision lines of Township 16 N., Range 4 West.

Chains
21.90

Ravine 20 lks. wide 5 ft. deep, course, S30°W.; Asc. over rolling SE. slope.

40.20

(Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. marked on brass cap




from which,

- A juniper 18 ins. in diam. bears S16 $\frac{1}{4}$ °E. 373 lks. dist., marked $\frac{1}{4}$ S9 BT.
- A juniper 18 ins. in diam. bears S36 $\frac{1}{2}$ °W. 113 lks. dist., marked $\frac{1}{4}$ S8 BT.

80.40

(Proportional dist.) Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in the ground for reestablished cor. of secs. 4, 5, 8, and 9, marked on brass cap.



from which,

- A juniper 6 ins. in diam. bears N72 $\frac{1}{4}$ °E. 102 lks. dist., marked T16N., R4W., S4 BT.
- A juniper 15 ins. in diam. bears S39 $\frac{3}{4}$ °E. 375 lks. dist., marked T16N., R4W., S9 BT.
- A juniper 13 ins. in diam. bears S26 $\frac{3}{4}$ °W. 131 lks. dist., marked T16N., R4W., S8 BT.
- A pine 6 ins. in diam. bears N56 $\frac{3}{4}$ °W. 51 lks. dist., marked T16N., R4W., S5 BT.

Land rolling.
Soil sandy 2 nd. rate.
Timber juniper and scattering pine.
Undergrowth, juniper and oak brush.


40.00
80.07

N 89°50'E. on a random line bet. secs. 4 and 9.
Set temp. $\frac{1}{4}$ sec. cor.
Intersect N. and S. line at the reestablished cor. of secs. 3, 4, 9, and 10.

Thence
S 89°50'W. on true line bet. secs. 4 and 9.
Over rolling sandy land, through scattering juniper timber and undergrowth.

1.50
14.40
40.03 $\frac{1}{2}$

Wire fence bears N. and S.
Ranch road bears NW. and SE.
(Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap




from which,

Resurvey of the Subdivision lines of Township 16 North, Range 4 West. 61

Chains
 A juniper 6 ins. in diam. bears $N30\frac{1}{2}^{\circ}W$. 125 lks. dist., marked $\frac{1}{4}$ S 4 BT.
 A juniper 20 ins. in diam. bears $S9\frac{1}{2}^{\circ}E$. 74 lks. dist., marked $\frac{1}{4}$ S 9 BT.
 45.00 Ascend 29 ft. over NE. slope
 76.00 Top of ridge, bears NW. and SE.; Descend over SW. slope to
 80.07 (Proportional dist.), The reestablished cor. of secs. 4, 5, 8, and 9.

Land rolling.
 Soil sandy 2nd. rate.
 Timber (E $\frac{1}{2}$) scattering (W $\frac{1}{2}$) heavy, juniper.
 Undergrowth, oak and juniper brush.
 Good grass.

Thence.
 $N 0^{\circ}50'W$. (computed bearing) on true line bet. secs. 4 and 5.
 Ascend 46 ft. over SW. slope over hilly land, through oak, cedar, and juniper timber and brush undergrowth.
 2.50 Top of ridge bears NW. and SE.; Descend gradually over NE. slope.
 17.00 Bottom of draw 200 lks. wide, course NE.; Ascend over rolling SE. slope.
 28.00 Top of ridge, bears NE. and SW.; Descend over rolling NW. slope
 40.20 (Proportional dist.), Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for reestablished sec. cor., marked on brass cap



from which,
 A juniper 12 ins. in diam. bears $N45\frac{3}{4}^{\circ}E$. 268 lks. dist., marked $\frac{1}{4}$ S 4 BT.
 A juniper 20 ins. in diam. bears $S64^{\circ}W$. 143 lks. dist., marked $\frac{1}{4}$ S 5 BT.
 56.90 Ranch road bears $N60^{\circ}W$, and $S60^{\circ}E$.
 80.60 (Proportional dist.) Intersect the reestablished closing cor. of secs. 4 and 5, T16N., R4W. on the 4th. Std. Par. N. hereinbefore described.

Land rolling and hilly.
 Soil sandy, 2nd. and 3rd. rate.
 Timber, oak, cedar, and juniper.
 Undergrowth, oak and juniper brush.

From the reestablished cor. of secs. 31 and 32 on S. bdy. of Tp., hereinbefore described.
 $N 0^{\circ}36'W$. (Computed bearing) on true line bet. secs. 31 and 32.
 Ascend 63 ft. over S. slope of ridge over stony hilly land, through oak and juniper timber and brush undergrowth.
 19.93 Top of ridge, bears E. and W.; Descend 57 ft. over N. slope
 27.15 Road from Fair Oaks to Prescott Arizona, bears E. and W.
 28.30 Old location of same road, bears NE. and SW.; Descend over NW. slope
 40.04 (Proportional dist.) Set an iron post 3 ft. long, 1 in.

62 Resurvey of the Subdivision lines of Township 16 North, Range 4 West.


Chains diam. 27 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 S 31 | S 32
 19 | 24

from which,
 A wild cherry 7 ins. in diam. bears S $38\frac{1}{2}^\circ$ E. 162 lks. dist marked $\frac{1}{4}$ S 32 BT.
 No other bearing trees available.; Deposit stone, marked with a cross (x) at base of post.

48.80 Road from Williamson Valley to Fair Oaks, bears N 10° E. and S 10° W.

57.90 Sand wash 40 lks. wide, 2 ft. deep, course NE.
 61.10 Ravine 2 lks. wide, $1\frac{1}{2}$ ft. deep, course NE.
 65.00 Sand wash 30 lks. wide, course NW.
 73.00 Same road, bears NW. and SE.
 77.00 Branch of same road bears NW. and SE.
 79.25 Same sand wash 50 lks. wide, course NE.
 80.08 (Proportional dist.), Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the ground for reestablished cor. of secs. 29, 30, 31, and 32., marked on brass cap




1924.

from which,
 A walnut 6 ins. in diam. bears N $64\frac{1}{2}^\circ$ E. 152 lks. dist., marked T16N., R4W., S29 BT.
 An oak 10 ins. in diam. bears S $56\frac{1}{2}^\circ$ E. 277 lks. dist., marked T16N., R4W., S32 BT.
 A juniper 5 ins. in diam. bears S $67\frac{1}{2}^\circ$ W. 97 lks. dist., marked T16N., R4W., S31 BT.
 An oak 4 ins. in diam. bears N 62° W. 92 lks. dist., marked T16N., R4W., S30 BT.
 Land, rolling and hilly.
 Soil sandy and stony 2nd. and 3rd. rate.
 Timber, scattering oak, walnut, wild cherry, and juniper.
 Undergrowth, oak brush.

S $89^\circ 53'$ E. (computed bearing) on a random line bet. secs. 29 and 32.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.01 (Proportional dist.) Intersect N. and S. line at the re-established cor. of secs. 28, 29, 32, and 33.

Thence
 N $89^\circ 53'$ W. on true line bet. secs. 29 and 32.
 Ascend E. slope over nearly level land, through scattering oak and heavy juniper timber and brush undergrowth.

7.98 Wire fence, bears N. and S.
 14.00 Descend 21 ft. over stony W. slope.
 35.00 Dry ravine 35 lks. wide 3 ft. deep, course NE.; Ascend 66 ft. over SE. slope
 40.00 (Proportional dist.); Set an iron post 3 ft. long, 1 in. in diam. 21 ins. in the ground to bedrock, supported in a mound of stone for reestablished $\frac{1}{4}$ sec. cor. marked on brass cap



1924

from which,

A juniper 12 ins. in diam. bears N 15° E. 101 lks. dist.

Resurvey of the Subdivision lines of Township 16 North., Range 4 West. 63

Chains marked $\frac{1}{4}$ S.29 BT.
 A juniper 9 ins. in diam. bears S80 $\frac{1}{2}$ °E.35 lks. dist., .
 marked $\frac{1}{4}$ S 32 BT.
 50.00 Top of ridge bears NE. and SW.; Descend 23 ft. over NW. slope
 51.53 Old wood road, bears NE. and SW.
 75.00 Foot of descent in E. edge of flat, bears NE. and SW.;
 Enter level land.
 79.00 Sand wash 80 lks. wide, banks 3 ft. high, course N20°E.
 80.01 (Proportional dist.) The reestablished cor. of secs. 29, 30,
 31, and 32
 Land level, rolling, and hilly.
 Soil sandy and stony 2nd. and 3rd. rate.
 Timber, oak and juniper.
 Undergrowth, oak and juniper brush.

40.00 N 89°53'W. on a random line bet. secs. 30 and 31.
 Set temp. $\frac{1}{4}$ sec. cor.
 78.60 (Proportional dist.) Intersect W. bdy. of Tp. at the reestab-
 lished cor. of secs. 30 and 31, T16N., R4W., hereinbefore
 described.
 Thence
 S 89°53'E. on true line bet. secs. 30 and 31.
 Descend 283 ft. over SE. slope over stony mountainous land,
 through heavy cedar and juniper timber and dense
 brush undergrowth.
 35.00 Dry ravine 6 lks. wide, course NE.; Ascend 40 ft. over NW.
 slope.
 38.73 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in
 diam., 12 ins. in the ground to bedrock, supported
 in a mound of stone for reestablished $\frac{1}{4}$ sec. cor.,
 marked on brass cap


$\frac{1}{4}$ S 30°
 $\frac{1}{4}$ S 31°
 1924

from which,
 A juniper 11 in. in diam. bears N15°E.59 lks. dist.,
 marked $\frac{1}{4}$ S 30 BT.
 A juniper 13 ins. in diam. bears S39 $\frac{1}{2}$ °W.120 lks. dist.,
 marked $\frac{1}{4}$ S 31 BT.
 40.00 Point of spur bears N.; Descend 69 ft. over E. slope
 55.60 Ravine 5 lks. wide, course NW.; Ascend 23 ft. over NW. slope.
 66.60 Top of ridge bears NE. and SW.; Descend 113 ft. over SE.
 slope.
 78.10 Road from Williamson Valley to Fair Oaks, bears N10°W. and
 S10°E.
 78.60 (Proportional dist.) The reestablished cor. of secs. 29, 30,
 31, and 32.
 Land, mountainous.
 Soil, stony 3rd. and 4th. rate.
 Timber, oak, cedar, and juniper.
 Undergrowth, oak, and juniper brush.


N 0°48'W. on true line bet. secs. 29 and 30.
 Ascend 72 ft. over SE. slope over rolling mountainous land
 through heavy cedar and juniper timber and brush
 undergrowth.
 6.47 Road from Williamson Valley to Fair Oaks, bears NE. and
 SW.
 10.00 Top of ridge bears NE. and SW.; Descend 80 ft. over NW.
 slope.
 39.15 Dry ravine 15 lks. wide, course N70°E.; Ascend 24 ft. over
 S. slope.

64 Resurvey of the Subdivision lines of Township 16 North., Range 4 West.

Chains
40.04 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap




from which,
A juniper 14 ins. in diam. bears $N71\frac{1}{2}^{\circ}E.$ 32 lks. dist., marked $\frac{1}{4}$ S 29 BT.
A juniper 9 ins. in diam. bears $N81\frac{1}{2}^{\circ}W.$ 15 lks. dist., marked $\frac{1}{4}$ S 30 BT.
43.48 Top of spur bears E.; Descend 8 ft. over N. slope.
47.02 Dry ravine 10 lks. wide 2 ft. deep, course E.; Ascend 36 ft. over S. slope.
52.00 Top of ascent on point of spur.; Descend gradually over NE. slope.
80.08 (Proportional dist.) Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the ground for reestablished cor. of secs. 19, 20, 29, and 30., marked on brass cap



from which,
A juniper 12 ins. in diam. bears $N33^{\circ}E.$ 49 lks. dist., marked T16N., R4W., S 20 BT.
A juniper 6 ins. in diam. bears $S47^{\circ}E.$ 84 lks. dist., marked T16N., R4W., S 29 BT.
A juniper $8\frac{1}{2}$ ins. in diam. bears $S31^{\circ}W.$ 105 lks. dist., marked T16N., R4W., S 30 BT.
A juniper 13 ins. in diam. bears $N45\frac{1}{2}^{\circ}W.$ 151 lks. dist., marked T16N., R4W., S 19 BT.
Land rolling mountains.
Soil stony, 3rd. and 4th. rate.
Timber, oak, cedar, and juniper.
Undergrowth, juniper and oak brush.

40.00 N $89^{\circ}51'E.$ on a random line bet. secs. 20 and 29. Set temp $\frac{1}{4}$ sec. cor.
80.09 (Proportional dist.) Intersect N. and S. line at the reestablished cor. of secs. 20, 21, 28, and 29.
Thence
S $89^{\circ}51'W.$ on true line bet. secs. 20 and 29
Over rolling stony land, through heavy oak and juniper timber and dense brush undergrowth.
5.85 Wire fence bears N. and S.
10.50 Descend 34 ft. over W. slope.
19.75 Sand wash 90 lks. wide, course N.; Ascend 86 ft. over E. slope
40.04 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap



Chains	from which,
	A juniper 14 ins. in diam. bears N5 $\frac{1}{2}$ $^{\circ}$ W. 130 lks. dist., marked $\frac{1}{4}$ S 20 BT.
	A juniper 11 ins. in diam. bears S18 $\frac{1}{4}$ $^{\circ}$ E. 38 lks. dist., marked $\frac{1}{4}$ S 29 BT.
48.00	Top of ridge bears NE. and SW.; Desc. over NW. slope.
48.15	Road from Williamson Valley to Fair Oaks, bears N30 $^{\circ}$ E. and S30 $^{\circ}$ W.
63.90	Dry ravine 30 lks. wide, course N20 $^{\circ}$ W.; Asc. 133 ft. over NE. slope.
80.09	(Proportional dist.) The reestablished cor. of secs. 19, 20, 29, and 30. Land rolling, and hilly. Soil stony 2nd. and 3rd. rate. Timber oak, cedar, and juniper. Undergrowth, oak and juniper brush.
<hr/>	
40.00	N 89 $^{\circ}$ 51'W. on a random line bet. secs. 19 and 30. Set temp. $\frac{1}{4}$ sec. cor.
78.53	(Proportional dist.) Intersect W. bdy. of Tp. at the reestablished cor. of secs. 19 and 30, T16N., R4W. hereinbefore described.
	Thence S 89 $^{\circ}$ 51'E. on true line bet. secs. 19 and 30. Descend 109 ft. over SE. slope over stony mountainous land through heavy juniper and oak timber and brush undergrowth.
24.45	Dry ravine in bottom of canyon, course NE.; Asc. 168 ft. over NW. slope
38.62	(Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. 10 ins. in the ground to bedrock, supported in a mound of stone for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S 19 S 30
	1924
	from which,
	A juniper 4 ins. in diam. bears N75 $\frac{1}{4}$ $^{\circ}$ E. 52 lks. dist., marked $\frac{1}{4}$ S 19 BT.
	A juniper 4 ins. in diam. bears S23 $\frac{1}{2}$ $^{\circ}$ E. 47 lks. dist., marked $\frac{1}{4}$ S 30 BT.
45.50	Top of spur bears NE.; Desc. 207 ft. over NE. slope to
78.53	(Proportional dist.) The reestablished cor. of secs. 19, 20, 29, and 30. Land mountainous. Soil stony 3rd. rate. Timber oak and juniper. Undergrowth, oak and juniper brush.
<hr/>	
	Thence N 0 $^{\circ}$ 54'W. on true line bet. secs. 19 and 20. Descend 23 ft. over NE. slope over rolling stony mountainous land, through heavy juniper timber and brush undergrowth.
33.92	Dry ravine 30 lks. wide, course NE.; Asc. 23 ft. over SE. slope.

66 Resurvey of the Subdivision lines of Township 16 North., Range 4 West.

Chains							
40.04	(Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. 20 ins. in the ground to bedrock, supported in a mound of stone for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap						
	<table border="1"> <tr> <td>$\frac{1}{4}$</td> <td></td> </tr> <tr> <td>S 19</td> <td>S 20</td> </tr> </table> 1924	$\frac{1}{4}$		S 19	S 20		
$\frac{1}{4}$							
S 19	S 20						
	from which,						
	A juniper 9 ins. in diam. bears S60°E. 25 lks. dist., marked $\frac{1}{4}$ S 20 BT.						
	A juniper 11 ins. in diam. bears S84 $\frac{1}{2}$ °W. 58 lks. dist., marked $\frac{1}{4}$ S 19 BT.						
	Ascend 21 ft. over SE. slope.						
47.50	Descend 23 ft. over NE. slope.						
58.85	Enter canyon, bears NE. and SW.						
67.40	Dry bed of creek 30 lks. wide, course E.						
72.80	Leave canyon, bears E. and W.; Ascend 132 ft. over SW. slope						
80.08	(Proportional dist.) Set an iron post 3 ft. long, 2 ins. in diam. 6 ins. in the ground to bedrock, supported in a mound of stone for reestablished cor. of secs. 17, 18, 19, and 20., marked on brass cap						
	<table border="1"> <tr> <td>T16N</td> <td>R4W</td> </tr> <tr> <td>S18</td> <td>S17</td> </tr> <tr> <td>S19</td> <td>S20</td> </tr> </table> 1924	T16N	R4W	S18	S17	S19	S20
T16N	R4W						
S18	S17						
S19	S20						
	from which,						
	A juniper 8 ins. in diam. bears N21 $\frac{1}{2}$ °E. 71 lks. dist., marked T16N., R4W., S 17 BT.						
	A juniper 7 ins. in diam. bears S53 $\frac{1}{4}$ °E. 28 lks. dist., marked T16N., R4W., S 20 BT.						
	A pine 7 $\frac{1}{2}$ ins. in diam. bears S49°W. 23 lks. dist., marked T16N., R4W., S 19 BT.						
	A juniper 6 ins. in diam. bears N38 $\frac{3}{4}$ °W. 58 lks. dist., marked T16N., R4W., S 18 BT.						
	Land mountainous.						
	Soil stony 3 rd. and 4 th. rate.						
	Timber oak, pine, and juniper.						
	Undergrowth, oak and juniper brush.						
	N 89°42'E. on a random line bet. secs. 17 and 20.						
40.00	Set temp. $\frac{1}{4}$ sec. cor.						
79.88	(Proportional dist.) Intersect N. and S. line at the reestablished cor. of secs. 16, 17, 20, and 21.						
	Thence						
	S 89°42'W. on true line bet. secs. 17 and 20.						
	Over stony hilly land, slopes NW. through scattering scrub juniper timber and brush.						
3.28	Wire fence bears NW. and SE.						
19.38	Dry sand wash 2000 lks. wide, course NE.; Ascend 211 ft. over NE. slope of ridge over stony mountainous land.						
39.94	(Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. 24 ins. in the ground to bedrock, supported in a mound of stone for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap						

Resurvey of the Subdivision lines of Township 16 North., Range 4 West. 67

Chains

$\frac{1}{4}$ S 17
 $\frac{1}{4}$ S 20

1924

from which,

A juniper 9 ins. in diam. bears N17°W.102 lks. dist.,
marked $\frac{1}{4}$ S 17 BT.

A juniper 10 ins. in diam. bears S75½°W.59 lks. dist.,
marked $\frac{1}{4}$ S 20 BT.

40.50 Enter heavy juniper timber, bears NW. and SE.
79.88 (Proportional dist.) The reestablished cor. of secs. 17, 18,
19, and 20.

Land hilly and mountainous.
Soil stony, 2nd., 3rd., and 4th. rate.
Timber, juniper.
Undergrowth, juniper and oak brush.

S 89°58'W. (computed bearing) on a random line bet. secs.
18 and 19.

40.00 Set temp. $\frac{1}{4}$ sec. cor.
78.39 (Proportional dist.) Intersect W. bdy. of Tp. at the reestab-
lished cor. of secs. 18 and 19, hereinbefore descri-
bed.

Thence
N 89°58'E. on true line bet. secs. 18 and 19.
Descend 86 ft. over SE. slope of ridge, over mountainous
land, through juniper timber and brush under-
growth.

38.50 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in
diam. 27 ins. in the ground for reestablished $\frac{1}{4}$
sec. cor., marked on brass cap

$\frac{1}{4}$ S 18
 $\frac{1}{4}$ S 19

1924

from which

A juniper 5 ins. in diam. bears N53°E. 18 lks. dist.,
marked $\frac{1}{4}$ S 18 BT.

A juniper 6 ins. in diam. bears S 10°E. 58 lks. dist.,
marked $\frac{1}{4}$ S 19 BT.

46.67 Ravine 8 lks. wide, course SE.; Ascend 12 ft. over W. slope.
48.47 Top of spur bears S.; Descend 30 ft. over E. slope.
50.02 Ravine 6 lks. wide, course S.; Ascend 30 ft. over W. slope.
52.47 Top of spur bears SW.; Descend 50 ft. over SE. slope.
58.65 Sand wash 20 lks. wide, course S.; Ascend 112 ft. over SW.
slope.

78.39 (Proportional dist.), The reestablished cor. of secs. 17, 18,
19, and 20.

Land mountainous.
Soil stony 2nd. and 3rd. rate.
Timber, oak and juniper.
Undergrowth, oak and juniper brush.


Thence
N 0°49'W. (Computed bearing) on true line bet. secs. 17 and
18.

Over rolling stony mountainous land, through heavy cedar
and juniper timber and brush undergrowth.

40.04 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in
diam. 23 ins. in the ground to bedrock, supported
in a mound of stone for reestablished $\frac{1}{4}$ sec. cor.
marked on brass cap

68 Resurvey of the Subdivision lines of Township 16 North., Range 4 West.


Chains



from which

- A juniper 4 ins. in diam. bears S43½°E.33 lks. dist., marked ¼ S 17 BT.
- A juniper 8 ins. in diam. bears S 54°W.72 lks. dist., marked ¼ S 18 BT.

- 40.20 Descend 30 ft. over N. slope.
- 41.67 Bottom of canyon.;cross ravine 30 lks. wide,course E.; Ascend 30 ft. over S.slope.
- 45.00 Point of spur bears E.;Descend 23 ft. over NE.slope.
- 60.29 Dry sand wash 60 lks. wide,course E.;Ascend 41 ft. over S.slope
- 64.50 Top of ascent;Descend over NE. slope
- 80.08 (Proportional dist.) Set an iron post 3 ft. long,2 ins. in diam.27 ins. in the ground for reestablished cor.of secs.7,8,17,and 18,marked on brass cap.



1924

from which

- A juniper 12 ins. in diam. bears N77°E. 177 lks. dist., marked T16N.,R4W.,S 8 BT.
- A juniper 10 ins. in diam.bears S66½°E.150 lks. dist., marked T16N.,R4W.,S 17 BT.
- A juniper 15 ins. in diam. bears S18½°W.91 lks. dist., marked T16N.,R4W.,S 18 BT.
- A juniper 32 ins. in diam. bears N 65°W.146 lks. dist., marked T16N.,R4W.:?S 7 BT.

Land rolling mountains.
Soil stony 2nd. and 3rd. rate.
Timber,cedar and juniper.
Undergrowth, juniper brush.

Thence

N 89°26'E.(Computed bearing) on a random line bet. secs. 8 and 17.

- 40.00 Set temp. 1 sec. cor.
- 79.86 (Proportional dist.) Intersect N. and S.line at the re-established cor.of secs.8,9,16,and 17.

Thence

S 89°26'W. on true line bet. secs.8 and 17.

- 1.96 Over rolling sandy land,through scattering juniper timber
- 5.76 Wire fence bears N. and S.
- 17.56 Sand wash 20 lks. wide,banks 2½ ft. high,course S.
- 20.66 Ranch road,bears NE. and SW.
- 35.16 Sand wash 10 lks. wide,banks 1½ ft. high,course S.
- 39.93 Sand wash 25 lks. wide,2½ ft. deep,course S.;Ascend 25 ft. over SE. slope.
- (Proportional dist.);Set an iron post 3 ft. long, 1 in. in diam.27 ins. in the ground for reestablished

Chains

sec. cor, marked on brass cap

$$\frac{1}{4} \frac{S 8}{S 17}$$

1924

from which,

- A juniper 6 ins. in diam. bears N 3°W. 55 lks. dist.,
marked $\frac{1}{4}$ S 8 BT.
- A juniper 9 ins. in diam. bears S 53 $\frac{3}{4}$ °W. 26 lks. dist.,
marked $\frac{1}{4}$ S 17 BT.
- 45.50 Descend 57 ft. over NW. slope.
- 52.48 Dry sand wash 500 lks. wide, course SE.; Leave rolling land
bears NW. and SE.; Enter level bottom land.
- 57.50 Windmill bears S. about 5.00 chs. dist.
- 59.28 Wire fence bears N 55 $\frac{1}{4}$ °W. and S 55 $\frac{1}{4}$ °E.
- 69.28 Sand wash 20 lks. wide, course N.
- 70.00 Leave level bottom land, bears NW. and SE.; Ascend 41 ft.
over NE. slope over stony hilly land.
- 79.86 (Proportional dist.) The reestablished cor. of secs. 7, 8, 17,
and 18.
- Land level rolling, and hilly.
Soil sandy and stony 1st. and 2nd. rate.
Timber cedar, and juniper.
Undergrowth, juniper brush.

- 40.00 S 89°50'W. on a random line bet. secs. 7 and 18.
- 78.46 Set temp. $\frac{1}{4}$ sec. cor.
(Proportional dist.) Intersect W. bdy. of Tp. at the
reestablished cor. of secs. 7 and 18 T16N., R4W.
hereinbefore described.
- Thence
N 89°50'E. on true line bet. secs. 7 and 18.
- Ascend SW. slope over hilly land, through scattering
juniper timber.
- 8.50 Top of ridge bears NW. and SE.; Enter heavy timber, bears
NW. and SE.; Descend 45 ft. over NE. slope.
- 38.53 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in
diam. 27 ins. in the ground for reestablished $\frac{1}{4}$
sec. cor., marked on brass cap

$$\frac{1}{4} \frac{S 7}{S 18}$$


1924

from which

- A juniper 12 ins. in diam. bears N 10°E. 123 lks. dist.,
marked $\frac{1}{4}$ S 7 BT.
- A juniper 12 ins. in diam. bears S 70 $\frac{1}{2}$ °E. 179 lks. dist.,
marked $\frac{1}{4}$ S 18 BT.
- 65.40 Dry sand wash 20 lks. wide, course N.; Asc. 23 ft. over W slope
- 73.50 Top of spur bears NE.; Desc. 25 ft. over E. slope.
- 74.46 Dry ravine 20 lks. wide, course N.; Asc. about 20 ft.
- 78.46 (Proportional dist.) The reestablished cor. of secs. 7, 8, 17,
and 18.
- Land hilly.
Soil stony 2nd. and 3rd. rate.
Timber juniper and pinion.
Undergrowth, juniper brush.

Resurvey of the Subdivision lines of Township 16 N., Range 4 west.


Chains Thence
 N 0°46'W. on true line bet. secs. 17 and 18.
 Descend 58 ft. over stony NE. slope over hilly land, thru.
 cedar and juniper timber and brush undergrowth.
 6.80 Foot of descent in valley; Leave hilly land, bears NW. and
 SE.; Enter level land.
 17.42 Wire fence bears N55½°W. and S55½°E.
 17.67 Ranch road bears NW. and SE.
 24.12 Sand wash 5.00 chs. wide, banks 3 ft. high, course SE.
 28.92 Sand wash 40 lks. wide 2 ft. deep, course S15°E.
 29.75 Leave level valley land bears NW. and SE.; Enter hilly
 land; asc. 23 ft. over S. slope
 40.04 (Proportional dist.) Set an iron post 3 ft. long, 1 in. in
 diam. 27 ins. in the ground for reestablished ¼
 sec. cor., marked on brass cap.



1924

from which,

A juniper 24 ins. in diam. bears N24½°E. 223 lks. dist.,
 marked ¼ S 8 BT.
 A juniper 30 ins. in diam. bears N74°W. 40 lks. dist.,
 marked ¼ S 7 BT.
 47.38 Dry ravine 30 lks. wide 4 ft. deep, course SW.; Asc. 29 ft.
 57.00 Top of ridge bears SE.; Desc. about 12 ft. over NE. slope.
 68.46 Dry ravine 8 lks. wide, course E.; Ascend 31 ft. over S.
 slope.
 76.43 Top of ridge bears NE. and SW.; Desc. NW. slope 15 ft.
 79.00 Ravine course SW.; Asc. 10 ft. to
 80.08 (Proportional dist.) set an iron post 3 ft. long, 2 ins. in
 diam. 20 ins. in the ground to bedrock, supported
 in a mound of stone for reestablished cor. of secs
 5, 6, 7, and 8., marked on brass cap



1924

from which,

A juniper 16 ins. in diam. bears N 53°W. 143 lks. dist.,
 marked T16N., R4w., S 6 BT.
 No other trees within limits.; Raise a mound of stone 2 ft.
 base, 1½ ft. high W. of cor.
 Land level and hilly.
 Soil sandy and stony 1st. 2, nd., and 3rd. rate.
 Timber cedar, pinion, and juniper.
 Undergrowth, oak and juniper brush.

N. 89°22'E. on a random line bet. secs. 5 and 8.
 40.00 Set temp ¼ sec. cor.
 80.05 (Proportional dist.) Intersect N. and S. line at the
 reestablished cor. of secs. 4, 5, 8, and 9.
 Thence
 S 89°22'W. on true line bet. secs. 5 and 8.
 Over rolling sandy land, through cedar and juniper timber
 and brush undergrowth.
 4.40 Wire fence bears N. and S.
 5.00 Ascend 29 ft. over E. slope.

Resurvey of the Subdivision lines of Township 16 North., Range 4 West

Chains
 13.00 Top of hill bears N. and S.; Desc. 46 ft. over W. slope.
 18.00 Ascend 14 ft. over E. slope.
 30.60 Top of ridge bears N. and S.; Desc. 29 ft. over W. slope.
 35.60 Foot of descent; Ascend 32 ft. over E. slope.
 40.02½ (Proportional dist.) Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for reestablished ¼ sec. cor., marked on brass cap

¼ S 5 / S 8

1924

from which,

A pine 10 ins. in diam. bears N41°W. 94 lks. dist., marked ¼ S 5 BT.
 A juniper 4 ins. in diam. bears S23½°E. 48 lks. dist., marked ¼ S 8 BT..
 43.90 Top of ridge bears N. and S.; Desc. about 20 ft. over W. slope.
 49.00 Foot of descent; Ascend 34 ft. over E. slope.
 54.00 Top of ascent on ridge bears NW. and SE.; Desc. about 15 ft. over W. slope.
 61.00 Ascend 32 ft. over E. slope.
 65.50 Top of spur bears S.; Desc. over W. slope.
 73.30 Ascend 24 ft. over SE. slope.
 77.60 Top of ridge bears NE. and SW.; Desc. 37 ft. over SW. slope.
 80.05 (Proportional dist.) The reestablished cor. of secs. 5, 6, 7, and 8.

Land rolling and hilly.
 Soil sandy and stony 2nd. rate.
 Timber cedar, pinion pine and juniper.
 Undergrowth juniper and oak brush.

S 89°51'W. on a random line bet. secs. 6 and 7.
 40.00 Set temp. ¼ sec. cor.
 78.35 (Proportional dist.) Intersect W. bdy. of Tpt at the reestablished cor. of secs. 6 and 7 T16N., R4W. herein before described.
 Thence
 N 89°50'E. on true line bet. secs. 6 and 7.
 Descend NE. slope over rolling sandy land, through oak and juniper timber and brush undergrowth.
 22.23 Wire fence bears N6°E. and S6°W.; Cor. of fence lines bears NW. and NE. 3.50 chs. N. of this point.
 24.00 Enter level sandy bottom land, bears NW. and SE.
 24.73 Dry sand wash 350 lks. wide, banks 1½ ft. high, course SE.
 30.00 Leave level bottom land, bears NW. and SE.; Enter stony hilly land; Ascend 94 ft. over NW. slope.
 38.25 Top of spur bears S.; Desc. 34 ft. over E. slope.
 38.30 (Proportional dist.) Set an iron post 3 ft. long 1 in. in diam. 26 ins. in the ground for reestablished ¼ sec. cor., marked on brass cap

¼ S 6 / S 7

1924

from which,

A juniper 12 ins. in diam. bears N84°E. 45 lks. dist., marked ¼ S 6 BT.
 A pine 7 ins. in diam. bears S10¼°W. 53 lks. dist., marked ¼ S 7 BT.

72 Resurvey of the subdivision lines of Township 16 North., Range 4 West.

Chains

42.23 Dry ravine 10 lks. wide, course S.; Asc. 60 ft. over W. slope
 50.23 Top of ridge bears NE. and SW.; Desc. 34 ft. over E. slope
 58.36 Dry ravine 20 lks. wide, course S.; Asc. 66 ft. over W. slope.
 65.55 Top of ridge bears NE. and SW.; Desc. 66 ft. over E. slope.
 74.95 Dry ravine 15 lks. wide, 3 ft. deep, course S30°W.; Asc. 44
 ft. over NW. slope to
 78.35 (Proportional dist.) The reestablished cor. of secs. 5, 6, 7, and
 8.
 Land level rolling, and hilly.
 Soil sandy and stony 2nd. and 3rd. rate.
 Timber pinion, cedar, oak, and juniper.
 Undergrowth oak and juniper brush.

N 0°37'W. on true line bet. secs. 5 and 6.
 Ascend S. slope 25 ft. over stony hilly land, through
 scattering juniper timber and oak brush, undergrowth
 2.10 Top of spur bears SW.; Desc. over NW. slope
 13.00 Dry ravine 15 lks. wide, course SW.; Asc. 82 ft. over SE.
 slope.
 40.04 (Proportional dist.) Set an iron post 3-ft. long, 1 in. in
 diam. 26 ins. in the ground for reestablished $\frac{1}{4}$ sec.
 cor. marked on brass cap

$\frac{1}{4}$
 S 6 | S 5

1924

from which,

A juniper 4 ins. in diam. bears N65 $\frac{1}{2}$ °E. 70 lks. dist.,
 marked $\frac{1}{4}$ S 5 BT.
 A pine 10 ins. in diam. bears S 48°W. 58 lks. dist.,
 marked $\frac{1}{4}$ S 6 BT.

42.50 Top of spur bears SW.; Desc. 57 ft. over NW. slope.
 60.40 Head of ravine course SW.; Asc. 55 ft. over SE. slope.
 69.70 Top of spur bears SW.; Desc. 37 ft. over NW. slope.
 73.52 Head of ravine course W.; Asc. 13 ft. over S. slope.
 79.90 Top of ridge bears NW. and SE.; Desc. 27 ft. over N. slope
 80.58 (Proportional dist.) Intersect the reestablished closing
 cor. of secs. 5 and 6 T16N., R4W. on 4th. Std. Par. N.
 hereinbefore described.

Land hilly.
 Soil sandy and stony 2nd. and 3rd. rate.
 Timber, oak, pinion, cedar and juniper.
 Undergrowth oak and juniper brush.

The continued satisfactory adjustment of the solar apparatus of the instruments used in the execution of the resurveys and surveys described in the foregoing notes is indicated from field tests of said instruments described in Book "B" of this group.

GENERAL DESCRIPTION

This township comprises ever variety of land from level valleys to rough mountains and the soil ranges from sandy loam to barren cliffs.

The township is highest along the west boundary and in the vicinity of the southwest corner, where the greatest elevation is attained and slopes in a general northeast direction towards the Williamson Valley which lies in the northeastern part of the township in sections 1, 11, 14, 15, and 23.

The soil of the bottom lands along the sand washes in secs.10,15,22,27, and a small portion of 16 and the greater portion of Williamson Valley is a dark sandy loam and can nearly all be classed as 1st. rate and will produce good crops without the aid of irrigation. ;The soil of the remainder of the township which is either hilly or mountainous is a stony clay loam unfit for agricultural purposes and can nearly all be classed as 3rd. rate.

The township is drained by several large sand washes which enter the township from the south and by Humphrey's Wash which crosses into the township on the west boundary of sec.6. These sand washes flow in a general easterly and northeasterly direction and empty into the Williamson valley, where their waters spread out over the entire valley in time of heavy rains.

The township is poorly watered, there being no permanent springs or living water found in the township during the progress of the survey. The source of water supply of the settlers in the township being derived from wells.

The western part of the township is well timbered with cedar, juniper, and oak, although the most of it is too small to be of any commercial use.

There are 9 settlers residing in the township, 1 each in secs.2,11,12,16, and 22, two each in secs.14 and 15.

Stock raising is the principal occupation of the settlers in the township, for which same is well adapted.

BOOK 3740
76

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Sidney E. Blout, U.S. Cadastral Engineer, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 128 Arizona bearing date of the 11th day of February, 1924, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, ~~RESURVEYED~~ all those parts or portions of Fourth Standard Parallel North, through Range 4 West and the South, East, West and North boundaries and subdivision lines of Township 16 North, Range 4 West and SURVEYED all those parts or portions of the North boundary of Fractional Township 15 1/2 North, Range 4 West of the Gila and Salt River

Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes ~~and by diagram on page 1 hereof~~ ^{and by diagram on page 1 hereof} said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 128 Arizona.

and in the specific manner described in the field notes, and that the foregoing are the original field notes of ~~such resurvey and survey.~~

Place Phoenix, Arizona
Date July 25, 1925

Sidney E. Blout
U.S. Cadastral Engineer ~~or Surveyor~~

APPROVAL.

OFFICE OF THE U.S. SUPERVISOR OF SURVEYS,

Denver, Colorado, December 28, 1926

The foregoing field notes of the ~~Survey of~~ ^{Resurvey of} the Fourth Standard Parallel North, through Range 4 West and the South, East, West and North boundaries and Subdivision lines of Township 16 North Range 4 West, and of the Survey of the North boundary of Fractional Township 15 1/2 North, Range 4 West of the Gila & Salt River Base and Meridian, in the State of Arizona

executed by Sidney E. Blout, U.S. Cadastral Engineer.

under his special instructions dated February 11, 1924 for Group 128, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the ~~RESURVEYED~~ ^{AND SURVEYS} they describe, are hereby approved.

Wm. H. Benson
U.S. Supervisor of Surveys

I certify that the foregoing transcript of the field notes of the above described surveys in _____, has been correctly copied from the original notes on file in this office.

U. S. Surveyor General

4-680

FIELD ASSISTANTS.
to
Sidney E. Blout, U.S. Cadastral Engineer

NAMES.	CAPACITY.
Ben Kollette	1st. Chainman
E.A. Blout	1st. Chainman.
Clifford Hook	2nd. Chainman.
John Slaughter	Flagman.
Stanley Palmer	Moundman.
E.A. Blout	Axman.