

BOOK 3755

# FIELD NOTES

OF THE SURVEY OF THE

East boundary of the ... of ...

Range 1 East boundary

and

Subdivision Lines of

Township 40 North, Range 1 East

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

### EXECUTED BY

Benjamin J Kinsey, U.S. Surveyor

AND

David M Daugherty, U.S. Transitman

In the capacity of U. S. Surveyors, under Special Instructions dated January 4, 1924 issued by the United States Surveyor General to govern surveys included in Group No. 126 Arizona, which were approved by the Commissioner of the General Land Office, March 12, 1924, and Assignment Instructions dated October 26, 1925 and March 13, 1926

Survey commenced April 4, 1926

Survey completed April 23, 1926

3755


3755

Book "I"

Group 126 - Arizona

BOOK 3755

INDEX DIAGRAM.

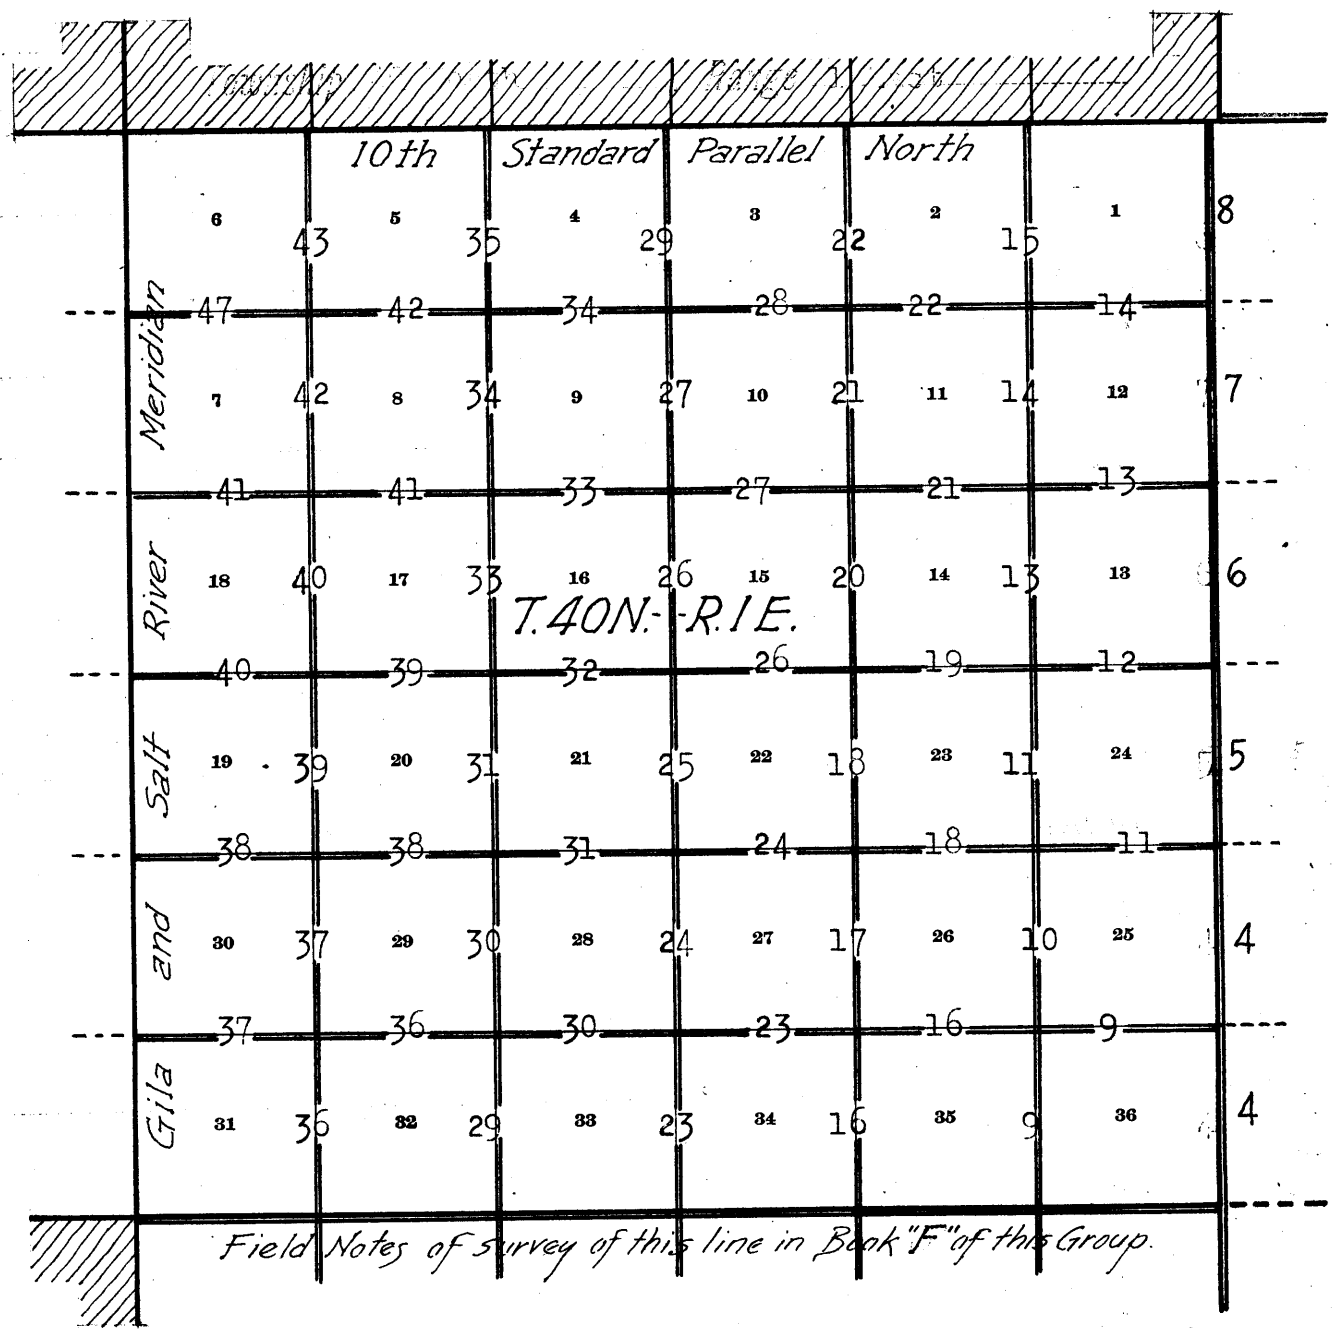

- Surveyed under this group.
- Surveyed under current Group No. 139.
- Accepted surveys.
- Unsurveyed.
- Areas surveyed as per accepted plats on file.

BOOK 3755

Book "I"

Group 126 Arizona.

Township 40 North., Range 1 East.

DATE DIAGRAM

1926

10 th. Standard Parallel North.

Surveyed by W.L. Nash, U.S. Transitman in October 1916

Surveyed by J.C. Thomas, U.S. Surveyor in July 1914  
Gila and Salt River Meridian.

6 4-13-26	5 4-13-26	4 4-7-26	3 4-14-26	2 4-14-26	1 4-22-26
7 4-13-26	8 4-11-26	9 4-7-26	10 4-13-26	11 4-14-26	12 4-22-26
18 4-12-26	17 4-12-26	16 4-8-26	15 4-12-26	14 4-16-26	13 4-21-26
19 4-11-26	20 4-11-26	21 4-6-26	22 4-12-26	23 4-16-26	24 4-17-26
30 4-10-26	29 4-10-26	28 4-6-26	27 4-10-26	26 4-15-26	25 4-15-26
31 4-10-26	32 4-6-26	33 4-6-26	34 4-10-26	35 4-15-26	36 4-20-26

Surveyed under this group. Notes and dates in Book "E"

Indicates lines surveyed by Benjamin J Kinsey, U.S. Surveyor, on dates shown above.

Indicates lines surveyed by David M Daugherty, U.S. Transitman, on dates shown above.

## BOOK 3755

The surveys hereinafter described were commenced on April 4, 1926 and executed on dates shown on diagram on page 1 hereof by Benjamin J Kinsey, U.S. Surveyor, using Buff transit No. 9940 and David M Daugherty, U.S. Transitman, using Young and Sons transit No. 8534. Both instruments are equipped with full vertical circle and improved Smith solar attachment unless otherwise specified all azimuth determinations are accomplished with the solar attachment except the special observations upon Polaris and the sun for meridian upon which to test the solar apparatus as stated in the field notes.

The instruments were examined, tested on the true meridian at the Federal Building at Phoenix Arizona, found correct, and were approved by the District Cadastral Engineer for Arizona and California, conditional upon satisfactory field tests.

FIELD TEST OF BUFF TRANSIT NO. 9940.

April 4, 1926, Examine the adjustments of the transit and find them correct, then in order to test the solar apparatus by comparing its indications resulting from solar observations, made during a.m. p.m. hours with a meridian established by observations on Polaris, proceed as follows;

On the same date at the  $\frac{1}{4}$  sec. cor. of secs. 16 and 21, T40N., R1E., G.B.M. Arizona, latitude  $36^{\circ}51'32''$ N. and longitude  $112^{\circ}18'41''$ W. At  $6^{\text{h}}39.6^{\text{m}}$  a.m., l.m.t. observe Polaris at western elongation, making four observations, two each with the telescope in direct and reversed positions and mark the mean point in the line thus determined by a tack in stake driven in the ground about 5-chs.S.

Azimuth of Polaris at elongation =  $1^{\circ}21'52''$ W.

April 4, At  $7^{\text{h}}30^{\text{m}}$  a.m., lay off the azimuth of Polaris  $1^{\circ}22'$  to the east and mark the meridian thus determined by a tack driven in a stake set firmly in the ground about 5-chs.S.

At  $9^{\text{h}}00^{\text{m}}$  a.m., App. time, set off  $36^{\circ}51\frac{1}{2}'$ N. on the lat. arc,  $5^{\circ}36'$ N. on the decl. arc and determine a meridian with the solar which agrees with the meridian established by the Polaris observations.

At apparent noon with the latitude arc unchanged, observe the sun on the meridian, the resulting reading of the declination arc is  $5^{\circ}38\frac{1}{2}'$ N. which agrees with the computed declination of the sun.

At  $3^{\text{h}}00^{\text{m}}$  p.m., App. time with the lat. arc unchanged, set off  $5^{\circ}41\frac{1}{2}'$ N. on the decl. arc and determine a meridian with the solar, which is found to agree with the true meridian.

As all the solar observations during the usual hours of solar work come within  $1'30''$  of the true meridian conclude that the adjustments of the instrument are satisfactory.

FIELD TEST OF YOUNG AND SONS TRANSIT NO. 8534.

h m  
 April 4, 1926, At 9 00 a.m., app. time, on the true meridian described above, set off  $36^{\circ}51\frac{1}{2}'$  N. on the lat. arc  $5^{\circ}36'$  N. on the decl. arc and determine a meridian with the solar, which is found to agree with the true meridian.

At apparent noon with the lat. arc unchanged, observe the sun on the meridian, the resulting reading of the decl arc is  $5^{\circ}38\frac{1}{2}'$  N. which agrees with the computed declination of the sun.

h m  
 At 4 00 p.m., app. time with the lat. arc unchanged, set off  $5^{\circ}43'$  N. on the decl. arc and determine a meridian with the solar which is found to agree with the true meridian.

As all the solar observations during the usual hours of solar work come within  $1'30''$  of the true meridian conclude that the adjustments of the solar are satisfactory.

-----  
 Unless otherwise specified all measurements are made with Lufkin 5-chain steel tapes, compared with a Chesterman standard steel tape, and found correct. The measurements are made on the slope, the vertical angle determined with a clinometer, and the slope measurements properly reduced to true horizontal distances.  
 -----

## Survey of East Boundary of T 40 N., R 1 E.

## Chains

From the cor. of Ts. 39 and 40 N., Rs. 1 and 2 E., described in Book "F" of this Group North bet. secs. 31 and 36.

Descend 171 ft. along W. slope over stony mountainous land, through scattering pinion and cedar timber and buckbrush undergrowth.

17.76 Draw 6 lks. wide, course N60°W., continue descent 57 ft. over rolling W. slope to

40.00 Set an iron post 3 ft. long, 1 in. in diam. 10 ins. in the ground to bedrock supported by a mound of stone 4 ft. base, 1½ ft. high for ¼ sec. cor., marked on brass cap

$\frac{1}{4}$   
 ↑  
 S 36 | S 31

1926

from which

A pinion 8 ins. in diam. bears N41°E. 37 lks. dist., marked ¼ S 31 BT.

A pinion 10 ins. in diam. bears N56°W. 28 lks. dist., marked ¼ S 36 BT.

48.50 Ascend 18 ft. over SW. slope  
Top of spur slopes N10°W.

78.60 Descend 224 ft. over NE. slope

Draw 5 lks. wide course N10°W.

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 26 ins. in the ground for cor. of secs. 25, 30, 31, and 36, marked on brass cap

T40N  
 R1E | R2E  
 S 25 | S 30  
 ---  
 S 36 | S 31

1926

No bearing trees available

Raise a mound of stone 2 ft. base, 1½ ft high W. of cor. Land, mountainous.

Soil, sandy and stony 4 th. rate.

Timber, scattering cedar and pinion.

Undergrowth, buckbrush.

North bet. secs. 25 and 30 .

Descend 35 ft. along W. slope over rolling mountainous land, through cedar and pinion timber and buckbrush undergrowth.

30.00 East edge of natural reservoir 500 lks. in diam. 6 ft. deep

Ascend 45 ft.

40.00 Top of spur slopes N. Set an iron post 3 ft. long 1 in. in diam. 16 ins. in the ground to bedrock supported by a mound of stone 2 ft. base, 1½ ft. high for ¼ sec. cor., marked on brass cap

## Survey of East Boundary of T 40 N., R 1 E.

Chains

$$\begin{array}{c} \frac{1}{4} \\ | \\ \text{S } 25 \text{ | S } 30 \\ | \\ 1926 \end{array}$$

from which

A pinion 10 ins. in diam. bears S12°E. 30 lks. dist.,  
marked  $\frac{1}{4}$  S 30 BT.

A pinion 12 ins. in diam. bears S80°W. 46 lks. dist.,  
marked  $\frac{1}{4}$  S 25 BT.

Descend 248 ft. over N. slope to

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 26 ins. in  
the ground for cor. of secs. 19, 24, 25, and 30,  
marked on brass cap

$$\begin{array}{c} \text{T40N} \\ | \\ \text{R 1 E | R 2 E} \\ | \\ \text{S 24 | S 19} \\ | \\ \text{S 25 | S 30} \\ | \\ 1926 \end{array}$$

from which.

A pinion 15 ins. in diam. bears N55°E. 03 lks. dist.,  
marked T40N., R2E., S19 BT.

A pinion 10 ins. in diam. bears S8 $\frac{1}{4}$ °E 30 lks. dist.,  
marked T40N., R2E., S30 BT.

A cedar 12 ins. in diam. bears S19 $\frac{1}{2}$ °W. 25 lks. dist.,  
marked T40N., R1E., S25 BT.

A pinion 12 ins. in diam. bears N45 $\frac{1}{2}$ °W. 56 lks. dist.,  
marked T40N., R1E., S24 BT.

Land, mountainous.

Soil, sandy and stony 4 th. rate.

Timber, cedar and pinion.

Undergrowth, buckbrush.

North bet. secs. 19 and 24.

Descend 17 ft. over NE. slope over stony mountainous  
land, through heavy cedar and pinion timber and  
buckbrush undergrowth.

4.67 Gulch 8 lks. wide, course N30°W.

20.00 Ascend 164 ft. over SW. slope  
Top of SW. slope.

40.00 Descend 214 ft. along W. slope

Set an iron post 3 ft. long, 1 in. in diam. 12 ins. in  
the ground to bedrock supported by a mound of stone  
for  $\frac{1}{4}$  sec. cor., marked on brass cap

$$\begin{array}{c} \frac{1}{4} \\ | \\ \text{S24 | S19} \\ | \\ 1926 \end{array}$$

from which

A pinion 7 ins. in diam bears S7°E. 18 lks. dist.,  
marked  $\frac{1}{4}$  S19 BT.

## Survey of East Boundary of T 40 N., R 1 E.

Chains

80.00 A cedar 6 ins. in diam. bears S79°W. 31 lks. dist.,  
marked  $\frac{1}{4}$  S24 BT.  
Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in  
the ground for cor. of secs. 13, 18, 19, and 24,  
marked on brass cap

T40N	
R1E	R2E
S13	S18
S24	S19

1926

from which

A pinion 12 ins. in diam. bears N5°E. 70 lks. dist.,  
marked T40N., R2E., S18 BT.  
A pinion 12 ins. in diam. bears S22°E. 68 lks. dist.,  
marked T40N., R2E., S19 BT.  
A pinion 10 ins. in diam. bears S78°W. 58 lks. dist.,  
marked T40N., R1E., S24 BT.  
A pinion 15 ins. in diam. bears N58°W. 83 lks. dist.,  
marked T40N., R1E., S13 BT.

Land, mountainous.

Soil, stony 4 th. rate.

Timber, cedar and pinion.

Undergrowth, sage and buck brush.

40.00 North bet. secs. 13 and 18.  
Descend 96 ft. along W. slope over stony mountainous  
land, through cedar and pinion timber and sage  
and buckbrush undergrowth.  
Set an iron post 3 ft. long, 1 in. in diam. 16 ins. in  
the ground to bedrock supported by a mound of  
stone 2 ft. base  $1\frac{1}{2}$  ft. high. for  $\frac{1}{4}$  sec. cor.,  
marked on brass cap

$\frac{1}{4}$	
S13	S18

1926

from which

A pinion 8 ins. in diam. bears N70°E. 102 lks. dist.,  
marked  $\frac{1}{4}$  S 18 BT.  
A cedar 3 ins. in diam. bears S30°W. 187 lks. dist.  
marked BT. only.

80.00 Continue descent 125 ft. along W. slope to  
Set an iron post 3 ft. long, 2 ins. in diam. 18 ins. in  
the ground to bedrock supported by a mound of  
stone 2 ft. base 10 ins. high for cor. of secs.  
7, 12, 13, and 18., marked on brass cap

T40N	
R1E	R2E
S12	S7
S13	S18

1926

from which




Survey of East Boundary of T 40 N., R 1 E.

Chains


A pinion 7 ins. in diam bears N29°E.69 lks. dist.,  
 marked T40N.,R2E.,S7 BT.  
 A pinion 14 ins. in diam. bears S68°E.26 lks. dist.,  
 marked T40N.,R2E.,S18 BT.  
 A pinion 6 ins. in diam. bears S42°W.80 lks. dist.,  
 marked T40N.,R1E.,S13 BT.  
 A pinion 12 ins. in diam.bears N42½°W.40 lks. dist.,  
 marked T40N.,R1E.,S12 BT  
 Land,mountainous.  
 Soil,stonny 4 th. rate.  
 Timber,cedar and pinion.  
 Undergrowth,sage and buck brush.

3.60  
 14.34  
 27.99  
 40.00

North bet. secs.7 and 12 .  
 Over rolling stony mountainous land,through cedar and  
 pinion timber and sagebrush undergrowth.  
 Top of spur,slopes N50°E.  
 Descend 152 ft. over NE. slope  
 Draw 5 lks. wide,course N20°W.  
 Ascend 120 ft. over SW. slope  
 Top of spur,slopes N30°W.  
 Descend 184 ft. over broken NE. slope.  
 Set an iron post 3 ft. long, 1 in. in diam.26 ins. in  
 the ground for ¼ sec. cor.,marked on brass cap



from which  
 A pinion 8 ins. in diam. bears S46°E.8 lks. dist.,  
 marked ¼ S7 BT.  
 A pinion 12 ins. in diam. bears N50°W.38 lks. dist.,  
 marked ¼ S12 BT.  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam.27 ins. in  
 the ground for cor. of secs.1,6,7,and 12,  
 marked on brass cap



from which  
 A cedar 12 ins. in diam. bears N69°E.150 lks. dist.,  
 marked T40N.,R2E.,S6 BT.  
 A pinion 14 ins. in diam. bears S3°E.64 lks. dist.,  
 marked T40N.,R2E.,S7 BT.  
 A pinion 20 ins. in diam. bears S42°W. 58 lks. dist.,  
 marked T40N.,R1E.,S12 BT.  
 A cedar 14 ins. in diam. bears N48°W.74 lks.dist.,  
 marked T40N.,R1E.,S1 BT.  
 Land,broken and mountainous.  
 Soil,sandy and stony 4 th. rate.  
 Timber,cedar and pinion.  
 Undergrowth,sage and buckbrush

## Survey of East Boundary of T 40 N., R 1 E.

Chains

North bet. secs. 1 and 6.

Over hilly land, through cedar and pinion timber and sagebrush undergrowth.

12.00 Ascend about 12 ft. over SW. slope.

24.00 Descend about 10 ft. over N. slope

34.00 Ascend about 14 ft. over SW. slope.

40.00 Set an iron post 3 ft. long, 1 in. in diam. 24 ins. in the ground for  $\frac{1}{4}$  sec. cor. marked on brass cap
$$\begin{array}{c} \frac{1}{4} \\ | \\ S1 | S6 \\ | \\ 1926 \end{array}$$

from which

A pinion 10 ins. in diam. bears S58°E. 44 lks. dist. marked  $\frac{1}{4}$ S6 BT.A cedar 8 ins. in diam. bears S15°W. 27 lks. dist., marked  $\frac{1}{4}$  S1 BT.

80.48 Intersect the 10 th. St. Par. N. 2.70 chs. W. of the S.C. of Ts. 41 N., Rs. 1 and 2 E. which is an iron post 3 ins. in diam. projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by two bearing trees one each NE. and NW. of cor.

At point of intersection, set an iron post 3 ft. long, 3 ins. in diam. 14 ins. in the ground to bedrock supported by a mound of stone 2 ft. base  $1\frac{1}{2}$  ft. high for closing cor. of Ts. 40 N., Rs. 1 and 2 E., marked on brass cap
$$\begin{array}{c} T41N R1E \\ \hline S 36 \\ \hline S 1 | S 6 \\ R1E | R2E \\ \hline CC \\ T40N \\ 1926 \end{array}$$

from which

A pinion 20 ins. in diam. bears S69°E. 125 lks. dist., marked T40N., R2E, S6 CC. BT.

A pinion 8 ins. in diam. bears S23°W. 40 lks. dist., marked T40N., R1E., S1 CC. BT.

Land, hilly.

Soil sandy and stony 4 th. rate.


Timber, cedar and pinion.

Undergrowth, sage and buck brush.


Survey of the Subdivision lines of T 40 N., R 1 E.

Chains

From the cor. of secs. 1, 2, 35, and 36 on S. bdy. of Tp. established under this group and described in Book "F"  
 N 0°01'W. bet. secs. 35 and 36.  
 Descend 521 ft. along E. slope of ridge over mountainous land, through heavy cedar and pinion timber and sage, oak, and buck brush.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap



from which  
 A pinion 14 ins. in diam. bears S82°E. 10 lks. dist., marked  $\frac{1}{4}$  S 36 BT.  
 A pinion 16 ins. in diam. bears N14°W. 15 lks. dist., marked  $\frac{1}{4}$  S 35 BT.  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 6 ins. in the ground to bedrock, supported by a mound of stone 3 ft. base 2 ft. high for cor. of secs. 25, 26, 35, and 36 marked on brass cap



from which  
 A pinion 11 ins. in diam. bears N73°E. 35 lks. dist., marked T40N., R1E., S 25 BT.  
 A pinion 14 ins. in diam. bears S25°E. 24 lks. dist., marked T40N., R1E., S 36 BT.  
 A pinion 8 ins. in diam. bears S5 $\frac{1}{2}$ °W. 28 lks. dist., marked T40N., R1E., S 35 BT.  
 A pinion 16 ins. in diam. bears N59°W. 72 lks. dist., marked T40N., R1E., S 26 BT.  
 Land, mountainous.  
 Soil, sandy and stony 4 th. rate.  
 Timber, cedar and pinion.  
 Undergrowth, sage, oak, and buck brush.

40.00 S 89°58'E. on a random line bet. secs. 25 and 36.  
 79.84 Set temp.  $\frac{1}{4}$  sec. cor.  
 Intersect E. bdy. of Tp. at the cor. of secs. 25, 30, 31, and 36, hereinbefore described.  
 Thence  
 N 89°58'W. on true line bet. secs. 25 and 36.  
 Descend 5 ft. over NW. slope over stony mountainous land through cedar and pinion timber and oak brush undergrowth.  
 1.06 Draw 5 lks. wide, course N10°W.  
 Ascend 74 ft. over NE. slope.  
 8.00 Top of spur, slopes N.  
 Descend 114 ft. over W. slope.  
 27.00 Draw 6 lks. wide, course N10°E.  
 Ascend 235 ft. over SE. slope

Survey of the Subdivision lines of T 40 N., R 1 E.

Chains

39.92 Set an iron post 3 ft. long, 1 in. in diam. 18 ins. in the ground to bedrock supported by a mound of stone 2 ft. base 1 ft. high for  $\frac{1}{4}$  sec. cor. marked on brass cap

$\frac{1}{4}$  S 25  
S 36

1926

from which

A pinion 8 ins. in diam. bears N77°W., 61 lks. dist., marked  $\frac{1}{4}$  S 25 BT.

A pinion 14 ins. in diam. bears S25°W. 55 lks. dist., marked  $\frac{1}{4}$  S 36 BT.

58.84 Top of spur, slopes N.  
Descend 230 ft. over W. slope.

75.12 Road bears N. and S.

75.54 Gulch 6 lks. wide, course N.

Ascend 109 ft. over W. slope to

79.84 The cor. of secs. 25, 26, 35, and 36.  
Land, mountainous.

Soil, sandy and stony 4 th. rate.

Timber cedar and pinion.

Undergrowth, oak and buck brush.

N 0°01'W. bet. secs. 25 and 26.

Ascend 10 ft. along broken E. slope of ridge through heavy cedar and pinion timber and sagebrush undergrowth to

40.00 Set an iron post 3 ft. long, 1 in. in diam. 2 ins. in the ground to bedrock supported by a mound of stone 6 ft. base 3 ft. high for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$   
S26 | S25

1926

from which

A pinion 3 ins. in diam. bears N80°E. 31 lks. dist., marked  $\frac{1}{4}$  S 25 BT.

A pinion 10 ins. in diam. bears N72 $\frac{1}{2}$ °W. 92 lks. dist., marked  $\frac{1}{4}$  S 26 BT.

Descend 150 ft. to

80.00 Top of spur, slopes NE. Set an iron post 3 ft. long, 2 ins. in diam. 18 ins. in the ground to bedrock, supported by a mound of stone 2 ft. base 1 $\frac{1}{2}$  ft. high for cor. of secs. 23, 24, 25, and 26, marked on brass cap

T40N | R1E  
S23 | S24  
S26 | S25

1926

from which

A pinion 9 ins. in diam. bears N70°E. 23 lks. dist., marked T40N., R1E., S24 BT.

Subdivision of T 40 N., R 1 E.

Chains

A cedar 6 ins. in diam bears S80°E. 24 lks. dist.,  
 marked T40N.,R1E.,S 25 BT.  
 A pinion 8 ins. in diam. bears S69½°W.21 lks. dist.,  
 marked T40N.,R1E.,S 26 BT.  
 A Pinion 11 ins. in diam. bears N39°W.25 lks. dist.,  
 marked T40N.,R1E.,S 23 BT.  
 Land,mountainous.  
 Soil, stony 4 th. rate.  
 Timber,cedar and juniper.  
 Undergrowth,sagebrush.

40.00 S 89°58'E. on a random line bet. secs.24 and 25.  
 79.80 Set temp.¼ sec. cor.  
 Intersect E. bdy.of Tp. 8 lks. N.of the cor.of secs.  
 19,24,25,and 30,hereinbefore described.  
 Thence  
 N 89°55'W. on true line bet.secs.24 and 25.  
 Ascend 110 ft.over NE.slope over stony mountainous land  
 through cedar and pinion timber and sagebrush  
 undergrowth.  
 4.80 Top of spur,slopes N30°W.  
 Descend 91 ft. over SW. slope.  
 24.81 Draw 8 lks. wide,course N15°W.  
 Ascend 31 ft. over NE. slope.  
 36.80 Top of spur slopes N.thence along N.slope.  
 39.90 Set an iron post 3 ft. long, 1 in. in diam.26 ins. in  
 the ground for ¼ sec. cor.,marked on brass cap

1 S 24  
 4 S 25

1926

from which  
 A pinion 10 ins. in diam. bears N60°E.64 lks. dist.,  
 marked ¼ S 24 BT.  
 A pinion 7 ins. in diam. bears S2°W. 19 lks. dist.,  
 marked ¼ S 25 BT.  
 49.80 Descend 153 ft. over NW. slope.  
 62.65 Gulch course N.  
 Ascend 124 ft. over broken E. slope.  
 63.02 Road bears N10°E. and S10°W.  
 79.80 The cor. of secs.23,24.25,and 26.  
 Land,mountainous.  
 Soil, stony 4 th. rate.  
 Timber,cedar and pinion.  
 Undergrowth,oak,and sagebrush.

N 0°01'W. bet. secs.23 and 24.  
 Descend 173 ft.over N.slope over mountainous land  
 through cedar and pinion timber and sagebrush under-  
 growth.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam.26 ins.in  
 the ground for ¼ sec. cor.,marked on brass cap

1  
 S 23 | S 24

1926

from which

Subdivision of T 40 N., R 1 E.

Chains

A cedar 12 ins. in diam. bears N5°E.74 lks. dist.,  
 marked  $\frac{1}{4}$  S 24 BT.  
 A cedar 8 ins. in diam. bears N17°W.158 lks. dist.,  
 marked  $\frac{1}{4}$  S 23 BT.  
 53.27 Road bears N45°W. and S45°E.  
 55.00 Wash 8 lks. wide course. N45°W. continue descent over W.  
 slope to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam.26 ins. in  
 the ground for cor. of secs.13,14,23,and 24  
 marked on brass cap

T40N	R1E
S 14	S 13
S 23	S 24

1926

from which

A pinion 8 ins. in diam. bears N83 $\frac{1}{2}$ °E.48 lks. dist.,  
 marked T40N.,R1E.,S 13 BT.  
 A pinion 8 ins. in diam. bears S71°E.34 lks. dist.,  
 marked T40N.,R1E.,S 24 BT.  
 A pinion 10 ins. in diam. bears S61 $\frac{1}{2}$ °W.89 lks. dist.,  
 marked T40N.,R1E.,S 23 BT.  
 A pinion 10 ins. in diam.bears N30°W.51 lks. dist.,  
 marked T40N.,R1E.,S 14 BT.

Land,mountainous.  
 Soil,stony 4 th. rate.  
 Timber,cedar and pinion.  
 Undergrowth,sagebrush.

40.00 S 89°55'E. on a random line bet. secs.13 and 24.  
 Set temp. $\frac{1}{4}$  sec. cor.  
 79.86 Intersect E. bdy .of Tp. 8 lks. S.of the cor.of secs.  
 13,18,19,and 24 hereinbefore described.

Thence  
 N 89°58'W. on true line bet. secs.13 and 24  
 Descend 131 ft. over W. slope over mountainous land,  
 through cedar and pinion timber and sagebrush  
 undergrowth.

37.92 Gulch,course N15°W.  
 Ascend 90 ft. over NE. slope  
 39.93 Set an iron post 3 ft. long, 1 in. in diam.20 ins. in the  
 ground to bedrock,supported by a mound of stone  
 2 ft. base 1 ft. high for  $\frac{1}{4}$  sec. cor.,marked on  
 brass cap

$\frac{1}{4}$ S 13
S 24

1926

from which

A pinion 6 ins. in diam. bears N24°E. 120 lks. dist.,  
 marked  $\frac{1}{4}$  S 13 BT.  
 A pinion 8 ins in diam. bears S8 $\frac{1}{2}$ °W.74 lks. dist.,  
 marked  $\frac{1}{4}$  S 24 BT.

48.50 Top of spur slopes N.  
 Descend 56 ft. over W. slope to  
 79.86 The cor. of secs.13,14,23,and 24.  
 Land,mountainous.  
 Soil,stony and sandy 4 th. rate.  
 Timber,cedar and pinion.  
 Undergrowth,sagebrush.

## Subdivision of T 40 N., R 1 E.

## Chains

N 0°01'W. bet. secs.13 and 14.  
 Along W. slope over broken stony land, through cedar and  
 pinion timber and sagebrush undergrowth.  
 7.00 Road bears N80°W. and S80°E.  
 17.74 Draw course N70°W.  
 40.00 Set an iron post 3 ft. long 1 in. in diam. 24 ins. in the  
 ground to bedrock for  $\frac{1}{4}$  sec. cor. marked on brass cap

$\frac{1}{4}$   
 S 14 | S 13

1926

from which  
 A pinion 10 ins. in diam. bears S80 $\frac{1}{2}$ °E. 20 lks. dist.,  
 marked  $\frac{1}{4}$  S 13 BT.  
 A pinion 15 ins. in diam. bears N83°W. 9 lks. dist.,  
 marked  $\frac{1}{4}$  S 14 BT.  
 63.50 Top of spur slopes N45°W.  
 Descend 207 ft. over NE. slope to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in  
 the ground for cor. of secs. 11, 12, 13, and 14,  
 marked on brass cap

T40N | R1E  
 S 11 | S 12  
 S 14 | S 13

1926

from which  
 A pinion 9 ins. in diam. bears N81°E. 8 lks. dist.,  
 marked T40N., R1E., S 12 BT.  
 A pinion 13 ins. in diam. bears S7°E. 105 lks. dist.,  
 marked T40N., R1E., S 13 BT.  
 A pinion 10 ins. in diam. bears S5°W. 94 lks. dist.,  
 marked T40N., R1E., S 14 BT.  
 A pinion 13 ins. in diam. bears N40°W. 4 lks. dist.,  
 marked T40N., R1E., S 11 BT.  
 Land, broken.  
 Soil, sandy and stony 4 th. rate.  
 Timber, cedar and pinion.  
 Undergrowth, sagebrush.

40.00 S 89°58'E. on a random line bet. secs. 12 and 13.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.77 Intersect E. bdy. of Tp. 14 lks. N. of the cor. of secs.  
 7, 12, 13, and 18, hereinbefore described.  
 Thence  
 N 89°52'W. on true line bet. secs. 12 and 13.  
 Descend 23 ft. over N. slope over mountainous land  
 through cedar and pinion timber and sagebrush  
 undergrowth.  
 39.88 Set an iron post 3 ft. long, 1 in. in diam. 8 ins. in  
 the ground to bedrock, supported by a mound of  
 stone 3 ft. base 2 ft. high for  $\frac{1}{4}$  sec. cor.,  
 marked on brass cap

Subdivision of T 40 N., R 1 E.

Chains

$\frac{1}{4}$  S 12  
S 13  
1926

from which

A cedar 12 ins. in diam. bears N63°W. 20 lks. dist.,  
marked  $\frac{1}{4}$  S 12 BT.  
A pinion 14 ins. in diam. bears S37°W. 122 lks. dist.,  
marked  $\frac{1}{4}$  S 13 BT.

58.00 Top of spur, slopes N.  
Descend 118 ft. over W slope to  
79.77 The cor. of secs. 11, 12, 13, and 14.  
Land, mountainous.  
Soil, stony 4 th. rate.  
Timber, cedar and pinion.  
Undergrowth, sagebrush.

N 0°01'W. bet. secs. 11 and 12.  
Descend 43 ft. along W. slope over broken stony land, thru.  
heavy cedar and pinion timber and sagebrush  
undergrowth.

14.70 Wash 40 lks. wide 5 ft. deep, course N60°W.; leave broken  
land nears NW. and SE. enter rolling land.  
40.00 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in  
the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$   
S 11 | S 12  
1926

from which

A pinion 3 ins. in diam. bears S28°E. 71 lks. dist.,  
marked BT. only.  
A cedar 3 ins. in diam. bears S39°W. 81 lks. dist.,  
marked BT. only.

43.00 Leave timber, bears NW. and SE.  
80.00 Set an iron post 3 ft. long, 2 ins. in diam. 26 ins. in the  
ground for cor. of secs. 1, 2, 11, and 12, marked on  
brass cap

T40N | R1E  
S 2 | S 1  
S 11 | S 12  
1926

Raise a mound of stone 2 ft. base, 1½ ft. high W. of cor.  
Land, rolling and broken.  
Soil, sandy and stony 4 th. rate.  
Timber cedar and pinion.  
Undergrowth, sagebrush.

40.00 S 89°52'E. on a random line bet. secs. 1 and 12.  
79.66 Set temp.  $\frac{1}{4}$  sec. cor.  
Intersect E. bdy. of Tp. 10 lks. S. of the cor. of secs. 1,  
6, 7, and 12, hereinbefore described



Subdivision of T 40 N., R 1 E.

Chains

Thence  
N 89°56'W. on true line bet. secs.1 and 12.  
Over broken stony land, through heavy cedar and pinion  
timber, and sagebrush undergrowth.

39.83 Set an iron post 3 ft. long, 1 in. in diam. 24 ins. in the  
ground to bedrock for  $\frac{1}{4}$  sec. cor., marked on brass c  
cap

$\frac{1}{4}$   $\frac{S 1}{S 12}$

1926

from which

A pinion 6 ins. in diam. bears N21°W. 123 lks. dist.,  
marked  $\frac{1}{4}$  S 1 BT.

A pinion 6 ins. in diam. bears S67°W. 74 lks. dist.,  
marked  $\frac{1}{4}$  S 12 BT.

75.00 Leave timber, bears N. and S.

79.66 The cor. of secs.1, 2, 11, and 12.

Land, broken.

Soil, sandy and stony 4 th. rate.

Timber, cedar and pinion.

Undergrowth, sagebrush.

N 0°01'W. on true line bet. secs.1 and 2.

Descend 161 ft. over NW. slope over rolling sandy and  
stony land.

40.00 Set an iron post 3 ft. long, 1 in. in diam. 10 ins. in the  
ground to bedrock, deposit a limestone 8x4x2 ins.  
marked with a cross (x) alongside, and raise a mound  
of stone 5 ft. base 2 ft. high around post for  
 $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$   
S 2 | S 1

1926

72.26 Road bears NW. and SE.

80.40 Intersect the 10 th. St. Par. N. 2.58 chs. W. of the S.C. of  
secs. 35 and 36, T41N., R1E. which is an iron post  
2 ins. in diam. projecting 12 ins. above ground  
firmly set, properly marked, and witnessed by a  
mound of stone N.

At point of intersection, set an iron post 3 ft. long,  
2 ins. in diam. 27 ins. in the ground for closing  
cor. of secs.1 and 2, marked on brass cap

T41N R1E  
S 35

S 2 | S 1  
T40N | R1E

CC  
1926

Raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$  ft. high S. of cor.

Land, rolling.

Soil, sandy and stony 3 rd. and 4 th. rate.

Timber, none.

Undergrowth, sagebrush

Subdivision of T 40 N., R 1 E.

Chains

From the cor. of secs. 2, 3, 34, and 35 on S. bdy. of Tp. established under this group and described in Book "F"  
 N 0° 01' W. bet. secs. 34 and 35.  
 Descend 216 ft. over N. slope. over stony mountainous land through heavy cedar and pinion timber and sagebrush undergrowth.

10.24

Gulch course W.  
 Ascend 149 ft. over S. slope.

20.00


Top of spur, slopes W.  
 Descend 274 ft. over N. slope.

31.45

Gulch, course W.  
 Ascend 203 ft. over S. slope

40.00

Top of spur, slopes NW.  
 Set an iron post 3 ft. long, 1 in. in diam. 10 ins. in the ground to bedrock supported by a mound of stone 3 ft. base 1 1/2 ft. high for 1/4 sec. cor., marked on brass cap



from which

A cedar 12 ins. in diam. bears S 89° E. 51 lks. dist., marked 1/4 S 35 BT.

A cedar 10 ins. in diam. bears N 82° W. 79 lks. dist., marked 1/4 S 34 BT.


Descend 255 ft. over N. slope.

47.54

Gulch course N 25° W. thence over broken W. slope

80.00

Set an iron post 3 ft. long, 2 ins. in diam. 10 ins. in the ground to bedrock supported by a mound of stone 4 ft. base 2 ft. high for cor. of secs. 26, 27, 34, and 35, marked on brass cap



from which

A pinion 12 ins. in diam. bears N 39° E. 50 lks. dist., marked T40N., R1E., S 26 BT.

A pinion 10 ins. in diam. bears S 77° E. 92 lks. dist., marked T40N., R1E., S 35 BT.

A pinion 12 ins. in diam. bears S 10° W. 203 lks. dist., marked T40N., R1E., S 34 BT.

A pinion 12 ins. in diam. bears N 6° W. 61 lks. dist., marked T40N., R1E., S 27 BT.

Land, broken and mountainous.  
 Soil, sandy and stony 4 th. rate.  
 Timber, cedar and pinion.  
 Undergrowth, juniper and sagebrush.

40.00

S 89° 58' E. on a random line bet. secs. 26 and 35.  
 Set temp. 1/4 sec. cor.

79.90

Intersect N. and S. line 2 lks. S. of the cor. of secs. 25, 26, 35, and 36.

Thence

N 89° 59' W. on true line bet. secs. 26 and 35.

Subdivision of T 40 N., R 1 E

Chains

Ascend 245 ft. over E. slope over stony mountainous land, through heavy cedar and pinion timber and sagebrush undergrowth.

9.19 Old road bears N20°W. and S20°E.

11.68 Top of ridge bears N. and S.

Descend 74 ft. over rolling NW. slope to

15.19 Grand Canyon highway bears N10°W. and S10°E.

39.95 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for 1/4 sec. cor., marked on brass cap

1/4 S 26  
S 35

1926

from which

A cedar 6 ins. in diam. bears N17°E. 33 lks. dist., marked 1/4 S 26 BT.

A cedar 10 ins. in diam. bears S9°E. 10 lks. dist., marked 1/4 S 35 BT.

Descend 132 ft. from cor.

68.09 Draw, 10 lks. wide, course N45°W.; Seepage water 3.50 chs. SE. of line in draw.

Ascend 28 ft. over NE. slope to

79.90 The cor. of secs. 26, 27, 34, and 35.

Land, mountainous.

Soil, sandy and stony 4 th. rate.

Timber, cedar and pinion.

Undergrowth, sage and buck brush.

N 0°01'W. bet. secs. 26 and 27.

Descend 15 ft. over W. slope over broken mountainous land, through cedar and pinion timber and sagebrush undergrowth. to

40.00 Set an iron post 3 ft. long, 1 in. in diam. 22 ins. in the ground to bedrock, supported by a mound of stone 2 ft. base, 1 ft. high for 1/4 sec. cor., marked on brass cap

1/4  
S 27 | S 26

1926

from which

A pinion 11 ins. in diam. bears S61°E. 141 lks. dist., marked 1/4 S 26 BT.

A pinion 10 ins. in diam. bears N46°W. 99 lks. dist., marked 1/4 S 27 BT.

Descend 200 ft. over NW. slope

41.50 Top of spur, slopes W.

52.76 Draw, course W.

Ascend 60 ft. over S. slope.

62.00 Top of spur, slopes N60°W.

Descend 108 ft. over NE. slope.

74.21 Draw, course NW.

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the ground for cor. of secs. 22, 23, 26, and 27, marked on brass cap

Subdivision of T 40 N., R1 E.

Chains

T40N	R1E
S 22	S 23
S 27	S 26

1926

from which

- A cedar 10 ins. in diam. bears S36°E. 345 lks. dist., marked T40N., R1E., S 26 BT.
  - A cedar 4 ins. in diam. bears S50°W. 360 lks. dist., marked BT. only.
  - A pinion 8 ins. in diam. bears N36°W. 335 lks. dist., marked T40N., R1E., S 22 BT.
- No other bearing trees available.  
 Raise a mound of stone 2 ft. base, 1½ ft. high W. of cor. Land, mountainous.  
 Soil, stony 4 th. rate.  
 Timber, cedar and pinion.  
 Undergrowth, oak, sage, and buck brush.

40.00  
79.84

S 89°59'E. on a random line bet. secs. 23 and 26.  
 Set temp. ¼ sec. cor.  
 Intersect N. and S. line 2 lks. N. of the cor. of secs. 23, 24, 25, and 26.

Thence  
 N 89°58'W. on true line bet. secs. 23 and 26.  
 Ascend 76 ft. over E. slope over stony mountainous land through cedar and pinion timber and sagebrush undergrowth.

7.53

Top of ridge bears N. and S.; Old road along top of ridge bears N. and S.  
 Descend 335 ft. over W. slope.

14.55  
39.92

Grand Canyon highway, bears N15°W. and S15°E.  
 Set an iron post 3 ft. long, 1 in. in diam. 20 ins. in the ground to bedrock supported by a mound of stone 2 ft. base, 1 ft. high for ¼ sec. cor., marked on brass cap

¼	S 23
	S 26

1926

from which

- A cedar 6 ins. in diam. bears N66°W. 79 lks. dist., marked ¼ S 23 BT.
- A cedar 10 ins. in diam. bears S15°E. 63 lks. dist., marked ¼ S 26 BT.

79.84


The cor. of secs. 22, 23, 26, and 27.  
 Land, mountainous.  
 Soil stony 4 th. rate.  
 Timber, cedar and pinion.  
 Undergrowth, sahebrush.

N 0°01'W. bet. 22 and 23.  
 Descend 83 ft. over W. slope over rolling sandy and stony land, through scattering cedar and pinion timber and sagebrush undergrowth

Subdivision of T 40 N., R 1 E.


Chains

40.00 Set an iron post 3 ft. long, 1 in. in diam. 6 ins. in the ground to bedrock, deposit a limestone 6x6x3 ins. marked with a cross (x) alongside, and raise a mound of stone 3 1/2 ft. base 1 1/2 ft. high around post for 1/4 sec. cor., marked on brass cap



No bearing trees available.

79.01 Wire fence bears E. 50 lks. dist. and W.  
80.00 Set an iron post 3 ft. long 2 ins. in diam. 27 ins. in the ground for cor. of secs. 14, 15, 22, and 23, marked on brass cap



from which


- A pinion 10 ins. in diam. bears N13 1/2° E. 84 lks. dist., marked T40N., R1E., S14 BT.
- A cedar 12 ins. in diam. bears S10° E. 39 lks. dist., marked T40N., R1E., S 23 BT.
- A cedar 14 ins. in diam. bears S71° W. 67 lks. dist., marked T40 N., R1E., S 22 BT.
- A pinion 13 ins. in diam. bears N49° W. 45 lks. dist., marked T40N., R1E., S 15 BT.

Land, rolling.  
Soil, sandy and stony 4 th. rate.  
Timber, cedar and pinion.  
Undergrowth, sagebrush.

40.00 S 89° 58' E. on a random line bet. secs. 14 and 23.  
Set temp. 1/4 sec. cor.  
79.72 Intersect N. and S. line 14 lks. N. of the cor. of secs. 13, 14, 23, and 24.

Thence  
N 89° 52' W. on true line bet. secs. 14 and 23 .  
Descend 68 ft. over W. slope over broken stony land, through cedar and pinion timber and sagebrush undergrowth.

7.69 Road bears N50° W. and S45° E.  
15.60 Gulch, course N50° W., thence along N. slope.  
39.86 Set an iron post 3 ft. long, 1 in. in diam. 18 ins. in the ground to bedrock, supported by a mound of stone 2 ft. base 14 ins. high for 1/4 sec. cor., marked on brass cap



from which

## Subdivision of T 40 N., R 1 E.

## Chains

- A cedar 10 ins. in diam. bears N38°W. 12 lks. dist.,  
marked  $\frac{1}{4}$  S 14 BT.
- A cedar 5 ins. in diam. bears S25°E. 31 lks. dist.,  
marked  $\frac{1}{4}$  S 23 BT.
- 69.23 Road bears NW. and SE.
- 70.98 Grand Canyon highway, bears N45°W. and S45°E.
- 79.16 Wire fence bears N. and S.
- 79.72 The cor. of secs. 14, 15, 22, and 23.  
Land, broken.  
Soil, sandy and stony 4 th. rate.  
Timber, cedar and pinion.  
Undergrowth, sagebrush.
- 
- N0°01'W. bet. secs. 14 and 15.  
Over rolling stony land, through scattering cedar and  
pinion timber and sagebrush undergrowth.
- 1.11 Wire fence, bears E. and W.
- 3.49 Grand Canyon highway at gate, bears S65°E. and W.
- 5.40 Road bears E. and W.
- 9.69 Road bears NW. and SE.
- 12.96 Old road bears E. and W.
- 17.20 Top of low ridge, bears E. and W.  
Descend 150 ft. over N. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the  
ground for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$   
S 15 | S 14  
1926

from which

- A pinion 12 ins. in diam. bears S10°E. 221 lks. dist.,  
marked  $\frac{1}{4}$  S 14 BT.
- A pinion 10 ins. in diam. bears S27°W. 175 lks. dist.,  
marked  $\frac{1}{4}$  S 15 BT.
- 62.29 Old road bears E. and W.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 26 ins. in  
the ground for cor. of secs. 10, 11, 14, and 15,  
marked on brass cap

T40N | R1E  
S 10 | S 11  
S 15 | S 14

1926

No trees suitable for bearing trees available.  
Raise a mound of stone 2 ft. base,  $1\frac{1}{2}$  ft. high W. of cor.  
Land, rolling.  
Soil, sandy and stony 4 th. rate.  
Timber, scattering cedar and pinion.  
Undergrowth, sagebrush.

Subdivision of T 40 N., R 1 E.

Chains

S 89°52'E. on a random line bet. secs.11 and 14.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.80 Intersect N. and S. line 10 lks. S. of the cor. of secs.  
 11,12,13,and 14.  
 Thence  
 N 89°56'W. on true line bet. secs.11 and 14.  
 Ascend 105 ft. over NE. slope over hilly land, through  
 scattering cedar and pinion timber and sagebrush  
 undergrowth.  
 19.80 Top of spur, slopes N60°W.  
 Descend 243 ft. over SW. slope  
 39.90 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the  
 ground for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$  S 11  
 S 14

1926

No bearing trees available .  
 54.80 Raise a mound of stone 2 ft. base,  $1\frac{1}{2}$  ft. high N. of cor.  
 Foot of descent. leave hilly land, bears NE. and SW. onto  
 rolling land .  
 67.08 Road bears N20°E. and S45°W.  
 79.80 The cor. of secs.10,11,14, and 15.  
 Land, rolling and hilly.  
 Soil, sandy and stony 4 th. rate.  
 Timber, scattering cedar and pinion.  
 Undergrowth, sagebrush.

N 0°01'W. bet. secs.10 and 11.  
 40.00 Over rolling stony land, through sagebrush undergrowth.  
 The point for the  $\frac{1}{4}$  sec. cor. falls in bed of sand wash  
 30 lks. wide 3 ft. deep, course W.; therefore continue  
 line and measurement N0°1'W. and at  
 40.65 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the  
 ground for witness cor. to the  $\frac{1}{4}$  sec. cor., marked  
 on brass cap

$\frac{1}{4}$   
 S 10 | S 11

WC

1926

80.00 Raise a mound of stone 2 ft. base,  $1\frac{1}{2}$  ft. high W. of cor.  
 Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in  
 the ground for cor. of secs. 2,3,10, and 11, marked  
 on brass cap

T40N | R1E  
 S 3 | S 2  
 S 10 | S 11

1926

Dig pits 18x18x12 ins. in each sec 3 ft. dist.  
 Land, rolling.  
 Soil, sandy and stony 3 rd. and 4 th. rate.  
 Timber, none.  
 Undergrowth, sagebrush.

Subdivision of T 40 N., R 1 E.

Chains

40.00 S 89°56'E. on a random line bet. secs.2 and 11.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.88 Intersect N. and S. line 14 lks. N. of the cor. of secs.  
 1,2,11, and 12.

Thence  
 N 89°50'W. on true line bet. secs.2 and 11.  
 Over rolling sandy land, through sagebrush undergrowth.  
 Road bears N. and S.  
 37.96 Set an iron post 3 ft. long, 1 in. in diam.26 ins. in the  
 39.94 ground for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$ S 2  
 $\frac{1}{4}$ S 11

1926

79.88 Raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$  ft. high N. of cor.  
 The cor. of secs.2,3,10, and 11.  
 Land, rolling.  
 Soil, sandy 3 rd. and 4 th. rate.  
 Timber, none.  
 Undergrowth, sagebrush.

40.00 N 0°01'W. on true line bet. secs.2 and 3.  
 Over rolling sandy land, through sagebrush undergrowth.  
 Set an iron post 3 ft. long, 1 in. in diam.12 ins. in  
 the ground to bedrock, deposit a limestone 4x4x3  
 ins. marked with a cross (x) alongside and raise a  
 mound of stone 2 ft. base, 1 $\frac{1}{2}$  ft. high around post  
 for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$   
 S 3 | S 2  
 1926

80.25 A cedar 8 ins. in dia. bears N37°E. 319 lks. dist.,  
 marked  $\frac{1}{4}$  S 2 BT  
 Intersect the 10 th. St. Par. N. 2.36 chs. W. of the S.C. of  
 secs.34 and 35 T41N., R1E. which is an iron post  
 2 ins. in diam. projecting 12 ins. above ground,  
 firmly set, properly marked on brass cap, and wit-  
 nessed by a mound of stone N.  
 At point of intersection, set an iron post 3 ft. long  
 2 ins. in diam. 18 ins. in the ground to bedrock.  
 deposit a limestone 6x6x4 ins. marked with a cross  
 (x) alongside, and raise a mound of stone 3 ft.  
 base 1 $\frac{1}{2}$  ft. high around post for closing cor. of  
 secs.2 and 3, marked on brass cap

T41N R1E  
 S 34  
 S 3 | S 2  
 T40N R1E  
 CC  
 1926

Land, rolling.  
 Soil, sandy and stony 3 rd. and 4 th. rate.  
 Timber, none.  
 Undergrowth, sagebrush.




Subdivision of T 40 N., R 1 E.

Chains

From the cor. of secs. 3, 4, 33, and 34 on S. bdy. of Tp., established under this group and described in Book "F"


N 0°02'W. bet. secs. 33 and 34.  
 Over rolling sandy and stony land, through scattering cedar and pinion timber and sagebrush undergrowth.  
 Road bears N60°W. and S60°E.  
 1.30 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the  
 40.00 ground for  $\frac{1}{4}$  sec. cor., marked on brass cap



1926

from which

A pinion 13 ins. in diam. bears S80°E. 171 lks. dist.,  
 marked  $\frac{1}{4}$  S 34 BT.  
 A pinion 10 ins. in diam. bears N64°W. 382 lks. dist.,  
 marked  $\frac{1}{4}$  S 33 BT.  
 Road bears N20°W. and S20°E.  
 74.40 Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in  
 80.00 the ground for cor. of secs. 27, 28, 33, and 34,  
 marked on brass cap




1926

No bearing trees available.  
 Dig pits 18x18x12 ins. in each sec. 3 ft. dist.  
 Land, rolling.  
 Soil, sandy 4 th. rate.  
 Timber, scattering cedar and pinion.  
 Undergrowth, sagebrush.

S 89°58'E. on a random line bet. secs. 27 and 34.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.81 Intersect N. and S. line 5 lks. S. of the cor. of secs.  
 26, 27, 34, and 35

Thence  
 West on true line bet. secs. 27 and 34.  
 Descend 204 ft. over W. slope over broken stony land,  
 through scattering cedar and pinion timber and  
 sagebrush undergrowth.

14.90 Gulch, course N20°W.  
 Ascend 97 ft. over NE. slope.  
 25.50 Top of spur, slopes N.  
 Descend 280 ft. over W. slope.  
 39.90 Set an iron post 3 ft. long, 1 in. in diam. 24 ins. in  
 the ground to bedrock for  $\frac{1}{4}$  sec. cor., marked on  
 brass cap



1926

from which

## Subdivision of T 40 N., R 1 E.

Chains

- A pinion 8 ins. in diam. bears North 184 lks. dist.,  
marked  $\frac{1}{4}$  S 27 BT.
- A pinion 12 ins. in diam. bears S1°E. 130 lks. dist.,  
marked  $\frac{1}{4}$  S 34 BT.
- 63.50 Foot of slope bears NE. and SW.; leave broken hilly land  
bears NE. and SW., enter rolling sandy land.
- 79.81 The cor. of secs. 27, 28, 33, and 34.  
Land, rolling, broken, and hilly.  
Soil, sandy and stony 4 th. rate.  
Timber, cedar and pinion.  
Undergrowth, sagebrush.
- 
- N 0°02'W. bet. secs. 27 and 28.  
Over rolling sandy land; through sagebrush undergrowth.
- 40.00 Set an iron post  $\frac{3}{4}$  ft. long, 1 in. in diam. 26 ins. in the  
ground for  $\frac{1}{4}$  sec. cor., marked on brass cap
- $\frac{1}{4}$   
 S 28 | S 27  
 1926
- 80.00 Raise a mound of stone 2 ft. base,  $1\frac{1}{2}$  ft. high W. of cor.  
Set an iron post 3 ft. long, 2 ins. in diam. 24 ins. in  
the ground to bedrock for cor. of secs. 21, 22, 27,  
and 28, marked on brass cap
- T40N | R1E  
 S 21 | S 22  
 S 28 | S 27  
 1926
- Dig pits 18x18x12 ins. in each sec. 3 ft. dist.  
Land, rolling  
Soil, sandy 4 th. rate.  
Timber, none.  
Undergrowth, sagebrush.
- 
- 40.00 East on a random line bet. secs. 22 and 27  
Set temp.  $\frac{1}{4}$  sec. cor.
- 79.78 Intrrsect N. and S. line 10 lks. S. of the cor. of secs.  
22, 23, 26, and 27.
- Thence  
S 89°56' W. on true line bet. secs. 22 and 27  
Descend 29 ft. over SW. slope over rolling sandy land  
through scattering cedar and pinion timber and  
sagebrush undergrowth.
- 5.40 Draw, course N35°W.  
Ascend 10 ft. over NE. slope
- 12.20 Top of spur, slopes N.  
Descend 115 ft. over W slope.
- 24.30 Foot of descent, thence over nearly level land.

## Subdivision of T 40 N., R 1 E.

Chains

39.89 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap

$$\begin{array}{c} \frac{1}{4} \text{ S } 22 \\ \hline \frac{1}{4} \text{ S } 27 \end{array}$$

1926

from which

A cedar 4 ins. in diam. bears N28°E. 607 lks. dist., marked  $\frac{1}{4}$  S 22 BT.

A cedar 5 ins. in diam. bears S60°W. 587 lks. dist., marked  $\frac{1}{4}$  S 27 BT.

79.78 The cor. of secs. 21, 22, 27, and 28.

Land, rolling.

Soil, sandy and stony 4 th. rate.

Timber, cedar and pinion.

Undergrowth, sagebrush.

40.00

N. 0°02'W. bet. secs. 21 and 22.

Over rolling sandy land, through sagebrush undergrowth.

Set an iron post 3 ft. long 1 in. in diam. 12 ins. in the ground, deposit a limestone 6x6x2 ins. marked with a cross (x) alongside, and raise a mound of stone  $3\frac{1}{2}$  ft. base 1 ft. high around post for  $\frac{1}{4}$  sec. cor., marked on brass cap

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 21 \text{ | } \text{S } 22 \\ \hline \end{array}$$

1926

47.50

Note; From this point L. Pratt's house bears N46 $\frac{1}{2}$ °W.

Bottom of draw, course W.

56.63

Grand Canyon highway, bears N70°E. and S70°W.

80.00

Set an iron post 3 ft. long, 2 ins. in diam. 26 ins. in the ground for cor. of secs. 15, 16, 21, and 22. marked on brass cap

$$\begin{array}{c} \text{T40N | R1E} \\ \hline \text{S } 16 \text{ | } \text{S } 15 \\ \hline \text{S } 21 \text{ | } \text{S } 22 \end{array}$$

1926

Dig pits 18x18x12 ins. in each sec. 3 ft. dist.

Land, rolling.

Soil, sandy 4 th. rate.

Timber, none.

Undergrowth, sagebrush.

Note; From this point L. Pratt's house bears S73 $\frac{1}{2}$ °W.

## Subdivision of T 40 N., R 1 E.

Chains.

40.00 N 89°56'E. on a random line bet. secs.15 and 22.  
Set temp.  $\frac{1}{4}$  sec. cor.

79.80 Intersect N. and S. line 10 lks. N. of the cor. of secs.  
14,15,22, and 23.

Thence  
West on true line bet. secs.15 and 22.  
Over rolling sandy land, through scattering cedar and  
pinion timber and sagebrush undergrowth.

1.52 Wire fence bears N. and S.

14.00 Grand Canyon highway, bears N45°E. and S45°W.; Old road  
joins highway at this point.

35.30 Road bears N30°W. and S30°E.

39.90 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the  
ground for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$  S 15  
S 22  
1926

79.80 No bearing trees available  
Raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$  ft. high N. of cor.  
The cor. of secs.15,16,21, and 22.  
Land, rolling.  
Soil, sandy 4 th. rate.  
Timber, scattering cedar and pinion.  
Undergrowth, sagebrush.

N 0°02'W. bet. secs.15 and 16.  
Over rolling sandy land through sagebrush undergrowth.  
Old highway, bears E. and W.

2.10 Enter scattering cedar and pinion timber, bears E. and W.

35.00 Point of low spur slopes W.

38.00 Descend 16 ft.

40.00 Set an iron post 3 ft. long 1 in. in diam. 26 ins. in  
the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap.

$\frac{1}{4}$   
S 16 | S 15  
1926

from which  
A pinion 9 ins. in diam. bears S60 $\frac{1}{2}$ °E. 60 lks. dist.,  
marked  $\frac{1}{4}$  S 15 BT.  
A cedar 11 ins. in diam. bears S62°W. 15 lks. dist.,  
marked  $\frac{1}{4}$  S 16 BT.

41.00 Road bears N35°E. and S35°W.

63.53 Road bears N20°W. and S35°E.

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 26 ins. in  
the ground for cor. of secs.9,10,15, and 16, marked  
on brass cap

T40N | R1E  
S 9 | S 10  
S 16 | S 15  
1926

from which

Subdivision of T 40 N., R1 E.

Chains

A pinion 12 ins. in dia. bears N44°E.42 lks. dist.,  
 marked T40N.,R1E.,S 10 BT..  
 A cedar 13 ins. in diam. bears S38°E.61 lks. dist.,  
 marked T40N.,R1E.,S 15 BT..  
 A pinion 12 ins. in diam. bears S70°W.79 lks. dist.,  
 marked T40N.,R1E.,S 16 BT..  
 A cedar 10 ins. in diam. bears N70°W.55 lks. dist.,marked  
 T40N.,R1E.,S 9 BT..  
 Land,rolling.  
 Soil,sandy 4 th. rate.  
 Timber,scattering cedar and pinion.  
 Undergrowth,sagebrush.

40.00  
 79.72

East on a random line bet. secs.10 and 15.  
 Set temp. $\frac{1}{4}$  sec. cor.  
 Intersect N. and S. line 12 lks. N.of the cor. of secs.  
 10,11,14,and 15.

.80  
 39.86

Thence  
 N 89°55'W.on true line bet. secs .10 and 15.  
 Over rolling sandy land,through scattering cedar and pin-  
 ion timber and sagebrush undergrowth.  
 Wash 12 lks. wide 12 ft. deep,course N.  
 Set an iron post 3 ft. long, 1 in. in diam.26 ins.in  
 the ground for  $\frac{1}{4}$  sec. cor.,marked on brass cap

$\frac{1}{4}$  S 10  
 S 15

1926

58.09  
 79.72

from which  
 A cedar 12 ins. in diam.bears N56 $\frac{1}{2}$ °E.673 lks. dist.,  
 marked  $\frac{1}{4}$  S 10 BT..  
 A cedar 6 ins. in diam.bears S77°W.270 lks. dist.,  
 marked  $\frac{1}{4}$  S 15 BT..  
 Wash 15 lks. wide 3 ft. deep,course N10°W.  
 The cor. of secs.9,10,15,and 16.  
 Land,rolling.  
 Soil,sandy 4 th. rate.  
 Timber,scattering cedar and pinion.  
 Undergrowth,sagebrush.

19.43  
 40.00

N 0°02'W. bet. secs.9 and 10.  
 Over rolling sandy land, through scattering cedar and  
 pinion timber and sage brush undergrowth.  
 Wash 10 lks. wide 3 ft. deep,course N35°W.  
 Ascend 17 ft. over S. slope of low spur.  
 Top of spur slopes N20°W.  
 Set an iron post 3 ft. long 1 in. in diam.24 ins. in the  
 ground to bedrock for  $\frac{1}{2}$  sec. cor.marked on brass  
 cap

S 9 | S 10

1926

## Subdivision of T 40 N., R 1 E.

Chains

from which

- A pinion 10 ins. in diam. bears  $S53\frac{1}{2}^{\circ}E.$  110 lks. dist.,  
marked  $\frac{1}{4}$  S 10 BT.  
A cedar 14 ins. in diam. bears  $N5\frac{1}{2}^{\circ}W.$  190 lks. dist.,  
marked  $\frac{1}{4}$  S 9 BT.  
Descend 58 ft. over NE. slope.  
80.00 Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in  
the ground for cor. of secs. 3, 4, 9, and 10, marked  
on brass cap

T40N	R1E
S 4	S 3
S 9	S 10
1926	

from which

- A cedar 10 ins. in diam. bears  $N62^{\circ}E.$  264 lks. dist.,  
marked T40N., R1E., S 3 BT.  
A cedar 6 ins. in diam. bears  $S67\frac{1}{2}^{\circ}E.$  113 lks. dist.,  
marked T40N., R1E., S 10 BT.  
A cedar 14 ins. in diam. bears  $S60^{\circ}W.$  689 lks. dist.,  
marked T40N., R1E., S 9 BT.  
A cedar 16 ins. in diam. bears  $N7^{\circ}W.$  286 lks. dist.,  
marked T40N., R1E., S 4 BT.  
Land, rolling.  
Soil, sandy 4 th. rate.  
Timber, scattering cedar and pinion.  
Undergrowth, sagebrush.

- 40.00 S  $89^{\circ}55'E.$  on a random line bet. secs. 3 and 10.  
Set temp.  $\frac{1}{4}$  sec. cor.  
79.80 Intersect. N. and S. line 2 lks. N. of the cor. of secs.  
2, 3, 10, and 11.  
Thence  
N  $89^{\circ}54'W.$  on true line bet. secs. 3 and 10.  
29.42 Over rolling sandy land, through sagebrush undergrowth.  
Wash 50 lks. wide 8 ft. deep, course  $N35^{\circ}W.$   
Enter scattering cedar and pinion timber bears NW. and  
SE.  
39.90 Set an iron post 3 ft. long, 1 in. in diam. 18 ins. in  
the ground to bedrock supported by a mound of  
stone  $2\frac{1}{2}$  ft. base 14 ins. high for  $\frac{1}{4}$  sec. cor.  
marked on brass cap

$\frac{1}{4}$	S 3
	S 10
1926	

from which

- A cedar 14 ins. in diam. bears  $N54^{\circ}W.$  45 lks. dist.,  
marked  $\frac{1}{4}$  S 3 BT.  
A cedar 16 ins. in diam. bears  $S57^{\circ}W.$  105 lks. dist.,  
marked  $\frac{1}{4}$  S 10 BT.  
79.80 The cor. of secs. 3, 4, 9, and 10.  
Land, rolling and broken.  
Soil, sandy and stony, 3 rd. and 4 th. rate.  
Timber, scattering cedar and pinion.  
Undergrowth, sagebrush.

## Subdivision of T 40 N., R 1 E.

Chains

N 0°02'W. on true line bet. secs. 3 and 4.  
Descend 70 ft. over N. slope over broken stony land, thru.  
scattering cedar and pinion timber and sagebrush  
undergrowth.

32.06 Sand wash 10 lks. wide 4 ft. deep, course N80°W.

Leave timber bears NW. and SE.

40.00 Set an iron post 3 ft. long, 1 in. in dia, 27 ins. in the  
ground for  $\frac{1}{4}$  sec. cor., marked on brass cap

$$\begin{array}{c} \frac{1}{4} \\ | \\ S\ 4\ | \ S\ 3 \\ | \end{array}$$

1926

80.34

Raise a mound of stone 2 ft. base,  $1\frac{1}{2}$  ft. high W. of cor.  
Intersect the 10 th. St. Par. N. 2.20 chs. W. of the S.C. of  
secs. 33 and 34, T41N., R1E., which is an iron post  
2 ins. in diam. projecting 12 ins. above ground  
firmly set, properly marked on brass cap, and  
witnessed by a mound of stone N.

At point of intersection, set an iron post 3 ft. long,  
2 ins. in diam. 27 ins. in the ground for closing  
of secs. 3 and 4, marked on brass cap

$$\begin{array}{c} T41N\ R1E \\ S\ 33 \\ \hline \end{array}$$

$$\begin{array}{c} S\ 4\ | \ S\ 3 \\ | \end{array}$$

$$\begin{array}{c} T40N\ R1E \\ CC \\ \hline \end{array}$$

1926

Raise a mound of stone 2 ft. base,  $1\frac{1}{2}$  ft. high S. of cor.  
Land, rolling and broken.  
Soil, sandy and stony 4 th. rate.  
Timber, scattering cedar and pinion.  
Undergrowth, sagebrush.

40.00

From the cor. of secs. 4, 5, 32, and 33 on S. bdy. of Tp.  
established under this group and described in  
Book "F"

N 0°03'W. bet. secs. 32 and 33.

Over rolling sandy land, through scattering sagebrush  
undergrowth.

Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in  
the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap

$$\begin{array}{c} \frac{1}{4} \\ | \\ S\ 32\ | \ S\ 33 \\ | \end{array}$$

1926

76.55

Raise a mound of stone 2 ft. base,  $1\frac{1}{2}$  ft. high W. of cor.  
Road bears N40°E. and S40°W.  
Ascend gradually over SE. slope.

## Subdivision of T40N., R1 E.

Chains.

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in the ground for cor. of secs. 28, 29, 32, and 33, marked on brass cap

T40N	R1E
S 29	S 28
S 32	S 33

1926

Raise a mound of stone 2 ft. base, 1½ ft. high W. of cor.  
Land, rolling.  
Soil, sandy 4 th. rate.  
Timber, none.  
Undergrowth, sagebrush.

40.00 S 89°58'E. on a random line bet. secs. 28 and 33.  
Set temp. ¼ sec. cor.  
80.04 Intersect N. and S. line 10 lks. S. of the cor. of secs. 27, 28, 33, and 34.

Thence

S 89°58'W. on true line bet. secs. 28 and 33.  
Over rolling sandy land, through scattering sagebrush undergrowth.

3.48 Road bears N20°W. and S20°E.  
30.58 Road to Ryan, bears N. and S.  
40.02 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for ¼ sec. cor., marked on brass cap

¼ S 28
S 33

1926

Dig pits 18x18x12 ins. E. and W. of post 3 ft. dist.  
Note; From this point a house belonging to Guevin, bears S9°E.

77.30 Old road bears N20°E. and S20°W.  
80.04 The cor. of secs. 28, 29, 32, and 33.  
Land, rolling.  
Soil, sandy and stony 4 th. rate.  
Timber, none.  
Undergrowth, sagebrush.


N 0°03'W. bet. secs. 28 and 29.  
Ascend along E. slope over rolling sandy land, through scattering cedar and pinion timber, and sagebrush undergrowth.

24.30 Top of spur, slopes N10°E.  
Descend 23 ft. over NW. slope.  
40.00 Set an iron post 3 ft. long, 1 in. in diam. 8 ins. in the ground to bedrock, supported by a mound of stone 3 ft. base 2 ft. high for ¼ sec. cor., marked on brass cap




Subdivision of T 40 N., R 1 E.

Chains




from which  
 A pinion 10 ins. in diam. bears N65 $\frac{3}{4}$ °E. 30 lks. dist.,  
 marked  $\frac{1}{4}$  S 28 BT.  
 A cedar 16 ins. in diam. bears S70°W. 157 lks. dist.,  
 marked  $\frac{1}{4}$  S 29 BT.  
 61.00 Leave timber bears E. and W.  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in the  
 ground for cor. of secs. 20, 21, 28, and 29, marked on  
 brass cap



Dig pits 18x18x12 ins. in each sec. 3 ft. dist.  
 Land, rolling.  
 Soil, sandy 4 th. rate.  
 Timber, scattering cedar and pinion.  
 Undergrowth, sagebrush.

40.00 N 89°58'E. on a random line bet. secs. 21 and 28.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.21 Intersect N. and S. line 8 lks. S. of the cor. of secs.  
 21, 22, 27, and 28.  
 Thence  
 S 89°55'W. on true line bet. secs. 21 and 28.  
 Over rolling sandy land, through sagebrush undergrowth.  
 36.58 Road to Ryan bears N. and S.  
 40.11 Set an iron post 3 ft. long, 1 in. in diam. 18 ins. in  
 the ground to bedrock, deposit a limestone 10x4x4  
 ins. marked with a cross (x) alongside, and raise  
 a mound of stone 3 ft. base 1 $\frac{1}{2}$  ft. high around  
 post for  $\frac{1}{4}$  sec. cor., marked on brass cap



50.21 Ascend 132 ft. over E. slope  
 80.21 Top of low spur, slopes N10°E., thence over rolling land.  
 The cor. of secs. 20, 21, 28, and 29.  
 Land, rolling.  
 Soil, sandy 4 th. rate.  
 Timber, none.  
 Undergrowth, sagebrush.

N 0°03'W. bet. secs .20 and 21

## Subdivision of T 40 N., R1 E

Chains  
40.00 Over rolling sandy land, through sagebrush undergrowth.  
Set an iron post 3 ft. long, 1 in. in diam. 10 ins. in the ground to bedrock, deposit a limestone 12x10x8 ins. marked with a cross (x) alongside, and raise a mound of stone 3 ft. base 2 ft. high around post for  $\frac{1}{4}$  sec. cor., marked on brass cap

$$\begin{array}{c} \frac{1}{4} \\ | \\ \text{S } 20 \mid \text{S } 21 \end{array}$$

1926

64.20 Raise a mound of stone 2 ft. base,  $1\frac{1}{2}$  ft. high W. of cor.  
Grand Canyon highway, bears N70°W. and S75°E.  
80.00 Set an iron post 3 ft. long, 2 ins. in diam. 8 ins. in the ground to bedrock, deposit a limestone 12x8x4 ins. marked with a cross (x) alongside, and raise a mound of stone 4 ft. base, 2 ft. high around post for cor. of secs. 16, 17, 20, and 21, marked on brass cap

$$\begin{array}{c} \text{T40N} \mid \text{R1E} \\ \text{S } 17 \mid \text{S } 16 \\ \text{S } 20 \mid \text{S } 21 \end{array}$$

1926

Land, rolling.  
Soil, sandy 4 th. rate.  
Timber, none.  
Undergrowth, sagebrush.

40.00 N 89°55'E. on a random line bet. secs. 16 and 21.  
Set temp.  $\frac{1}{4}$  sec. cor.  
80.28 Intersect N. and S. line 8 lks. N. of the cor. of secs. 15, 16, 21, and 22.  
Thence  
S 89°58'W. on true line bet. secs. 16 and 21.  
24.80 Over rolling sandy land, through sagebrush undergrowth.  
Road bears N20°E. and S20°W.  
40.14 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap

$$\begin{array}{c} \text{S } 16 \\ \frac{1}{4} \text{ S } 21 \end{array}$$

1926

from which  
A cedar 12 ins. in diam. bears N43°E. 35 lks. dist., marked  $\frac{1}{4}$  S 16 BT.  
A cedar 12 ins. in diam. bears S61°E. 160 lks. dist., marked  $\frac{1}{4}$  S 21 BT.  
66.68 Wash 20 lks. wide 2 ft. deep, course N5°W.  
80.28 The cor. of secs. 16, 17, 20, and 21.

Land, rolling.  
Soil, sandy 4 th. rate.  
Timber, scattering cedar and pinion.  
Undergrowth, sagebrush.

Subdivision of T 40 N., R 1 E.

Chains

N 0°03'W. bet. secs.16 and 17.  
Over rolling sandy prairie land, through sagebrush undergrowth.

15.75


Wash 4 lks. wide 1 ft. deep, course N60°W.

39.90

Old highway from Fredonia to the Grand Canyon, bears N45°W. and S45°E.


40.00

Set an iron post 3 ft. long, 1 in. in diam. 8 ins. in the ground to bedrock, deposit a limestone 10x10x3 ins. marked with a cross (x) alongside, and raise a mound of stone 3 ft. base, 2 ft. high around post for 1/4 sec. cor., marked on brass cap



80.00

Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the ground for cor. of secs. 8, 9, 16, and 17, marked on brass cap



Raise a mound of stone 2 ft. base, 1 1/2 ft. high W. of cor. Land, rolling.  
Soil, sandy 4 th. rate.  
Timber, none.  
Undergrowth, sagebrush.

40.00

N 89°58'E. on a random line bet. secs. 9 and 16. Set temp. 1/4 sec. cor.

80.32

Intersect N. and S. line 5 lks. S. of the cor. of secs. 9, 10, 15, and 16.

Thence

S 89°56'W. on true line bet. secs. 9 and 16.

Over rolling sandy land, through scattering cedar and pinion timber and sagebrush undergrowth.

9.67


Road bears N and S 10°E.

29.62

Wash 14 lks. wide 3 ft. deep, course N30°W.

40.16

Set an iron post 3 ft. long, 1 in. in diam. 10 ins. in the ground to bedrock supported by a mound of stone 4 ft. base 2 1/2 ft. high for 1/4 sec. cor., marked on brass cap



from which

A cedar 14 ins. in diam. bears N30 1/2°W. 96 lks. dist., marked 1/4 S 9 BT.

A cedar 16 ins. in diam. bears S74 1/2°W. 130 lks. dist., marked 1/4 S 16 BT.

## Subdivision of T 40 N., R 1 E.

Chains	Descend 91 ft. over W. slope. Road bears N. and S. Wash 6 lks. wide 2 ft. deep, course N. The cor. of secs. 8, 9, 16, and 17. Land, rolling. Soil, sandy 4 th. rate. Timber, scattering cedar and pinion. Undergrowth, sagebrush.
74.65	
75.32	
80.32	
<hr/>	
	N 0°03'W. bet. secs. 8 and 9. Over rolling sandy land, slopes N. through sagebrush undergrowth.
19.35	Wash 3 lks. wide 4 ft. deep, course N45°W.
20.00	Old road bears N45°W? and S45°E.
40.00	Set an iron post 3 ft. long, 1 in. in diam. 12 ins. in the ground to bedrock, deposit a limestone 12x8x2 ins marked with a cross (x) alongside, and raise a mound of stone 3 ft. base 2 ft. high around post for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S 8   S 9   1926
80.00	Set an iron post 3 ft. long, 2 ins. in diam. 8 ins. in the ground to bedrock, deposit a limestone 10x6x4 ins. marked with a cross (x) alongside, and raise a mound of stone 3 ft. base 2 ft. high around post for cor. of secs. 4, 5, 8, and 9, marked on brass cap
	T40N   R1E S 5   S 4 S 8   S 9   1926
	Land, rolling. Soil, sandy 4 th. rate. Timber, none. Undergrowth, sagebrush.
<hr/>	
40.00	N 89°56'E. on a random line bet. secs. 4 and 9. Set temp. $\frac{1}{4}$ sec. cor.
80.30	Intersect N. and S. line at the cor. of secs. 3, 4, 9, and 10 Thence S 89°56'W. on true line bet. secs. 4 and 9. Descend 28 ft. over W. slope over rolling sandy land, thru. scattering cedar and pinion timber and sagebrush undergrowth.
10.00	Ascend 46 ft. over NE. slope.
19.00	Top of spur, slopes N20°W. Descend 83 ft. over SW. slope.
34.35	Wash 25 lks. wide 4 ft. deep, course N30°W., thence over rolling land.
40.15	Set an iron post 3 ft. long, 1 in. in diam. 18 ins. in the ground to bedrock, supported by a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high for $\frac{1}{4}$ sec. cor., marked on brass cap

Subdivision of T 40 N., R 1 E.

Chains

$\frac{1}{4}$  S 4  
S 9  
1926

from which  
A pinion 16 ins. in diam. bears N50 $\frac{1}{2}$ °W. 58 lks. dist.,  
marked  $\frac{1}{4}$  S 4 BT.  
A cedar 10 ins. in diam. bears S51 $\frac{1}{2}$ °W. 10 lks. dist.,  
marked  $\frac{1}{4}$  S 9 BT.  
57.70 Road bears N45°W. and S45°E.  
80.30 The cor. of secs. 4, 5, 8, and 9.  
Land, rolling.  
Soil, sandy 4 th. rate.  
Timber, scattering cedar and pinion.  
Undergrowth, sagebrush.

N 0°03'W. on true line bet. secs. 4 and 5.  
Over rolling sandy land, through scattering cedar and pin-  
ion timber and sagebrush undergrowth.  
22.30 Road bears N70°W. and S70°E.  
40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the  
ground for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$   
S 5 | S 4  
1926

from which  
A cedar 8 ins. in diam. bears N88°E. 55 lks. dist.,  
marked  $\frac{1}{4}$  S 4 BT.  
A cedar 14 ins. in diam. bears S23 $\frac{1}{4}$ °W. 171 lks. dist.,  
marked  $\frac{1}{4}$  S 5 BT.  
52.70 Wash 3 lks. wide 1 ft. deep, course N50°W.  
60.81 Wash 8 lks. wide 2 ft. deep, course N75°W.  
80.37 Intersect the 10 th. St. Par. N. 2.48 chs. W. of the S.C. of  
secs. 32 and 33, T41N., R1E., which is an iron post  
2 ins. in diam. projecting 12 ins. above ground, firmly  
set, properly marked on brass cap, and witnessed by  
three pits crosswise on line N., E., and W. of cor.  
At point of intersection, Set an iron post 3 ft. long, 2  
ins. in diam. 14 ins. in the ground to bedrock.  
deposit a limestone 14x8x2 ins. marked with a cross  
(x) alongside, and raise a mound of stone 2 $\frac{1}{2}$  ft.  
base, 22 ins. high around post for closing cor. of  
secs. 4 and 5, marked on brass cap

T41N R1E  
S 32  
S 5 | S 4  
T40N R1E  
CC  
1926

No bearing trees within limits .  
Land, rolling.  
Soil, sandy 4 th. rate.  
Timber, scattering cedar and pinion.  
Undergrowth, sagebrush.

Subdivision of T 40 N., R 1 E.


Chains

From the cor. of secs. 5, 6, 31, and 32 on S. bdy. of Tp. established under this group and described in Book "F"

N 0° 03' W. bet. secs. 31 and 32.


Over rolling sandy prairie land, slopes N. through sagebrush undergrowth.

40.00 Set an iron post 3 ft. long, 1 in. in diam. 14 ins. in the ground to bedrock, deposit a limestone 6x4x4 ins. marked with a cross (x) alongside, and raise a mound of stone 2½ ft. base 2 ft. high around post for ¼ sec. cor., marked on brass cap



78.00  
80.00

Enter scattering cedar and pinion timber bears E. and W. Set an iron post 3 ft. long, 2 ins. in diam. 4 ins. in the ground to bedrock, supported by a mound of stone 4 ft. base, 2½ ft. high for cor. of secs. 29, 30, 31, and 32, marked on brass cap



from which

A pinion 6 ins. in diam. bears N 87° E. 197 lks. dist., marked T40N., R1E., S29 BT

A pinion 16 ins. in diam. bears S 45° E. 132 lks. dist., marked T40N., R1E., S 32 BT.

A pinion 7 ins. in diam. bears S 75¼° W. 73 lks. dist., marked T40N., R1E., S 31 BT.

A pinion 8 ins. in diam. bears N 80° W. 171 lks. dist., marked T40N., R1E., S 30 BT.

Land, rolling.

Soil, sandy 4 th. rate.

Timber, scattering cedar and pinion.

Undergrowth, sagebrush.

40.00  
79.97

S 89° 58' E. on a random line bet. secs. 29 and 32.

Set temp. ¼ sec. cor.

Intersect N. and S. line 12 lks. N. of the cor. of secs. 28, 29, 32, and 33.

Thence

N 89° 53' W. on true line bet. secs. 29 and 32.

Ascend 27 ft. over E. slope over rolling sandy land, thru. scattering pinion and cedar timber and sagebrush undergrowth.

9.99

Top of spur, slopes N 15° E.

Descend 30 ft. over rolling NW. slope.

39.98

Set an iron post 3 ft. long, 1 in. in diam. 14 ins. in the ground to bedrock, deposit a limestone 10x6x3 ins. marked with a cross (x) alongside, and raise a mound of stone 3 ft. base 2 ft. high around post for ¼ sec. cor., marked on brass cap

Subdivision of T 40 N., R 1 E.

Chains

1/4 S 29  
S 32  
1926

79.97 No bearing trees within limits.  
The cor. of secs. 29, 30, 31, and 32.  
Land, rolling.  
Soil, sandy 4 th. rate.  
Timber, scattering pinion.  
Undergrowth, sagebrush.

40.00 N 89°58'W. on a random line bet. secs. 30 and 31.  
Set temp. 1/4 sec. cor.  
78.03 Intersect the Gila and Salt River Meridian 15 lks. N. of the  
witness cor. to cor. of secs. 25, 30, 31, and 36, which  
is an iron post 3 ins. in diam. projecting 12 ins.  
above ground, firmly set, properly marked on brass  
cap, and witnessed by a mound of stone W.  
Thence from true point for cor. of secs. 25, 30, 31, and 36  
S 89°56'E. on true line bet. secs. 30 and 31.  
Over rolling sandy land through scattering cedar and pin-  
ion timber and sage brush undergrowth.  
30.43 Wash 2 lks. wide 2 ft. deep, course N20°W.  
38.03 Set an iron post 3 ft. long, 1 in. in dia. 16 ins. in the  
ground to bedrock. deposit a limestone 10x8x6 ins.  
marked with a cross (x) alongside, and raise a mound  
of stone 2 1/2 ft. base 1 1/2 ft. high around post for  
1/4 sec. cor., marked on brass cap

1/4 S 30  
S 31  
1926

78.03 No bearing trees within limits.  
The cor. of secs. 29, 30, 31, and 32.  
Land, rolling.  
Soil, sandy 4 th. rate.  
Timber, scattering cedar and pinion.  
Undergrowth, sagebrush.

10.00 N 0°03'W. bet. secs. 29 and 30.  
Over rolling sandy land, through sagebrush undergrowth  
and scattering pinion timber.  
40.00 Leave timber bears E. and W.  
Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the  
ground for 1/4 sec. cor. marked on brass cap

1/4  
S 30 | S 29  
1926

64.00 Raise a mound of stone 2 ft. base, 1 1/2 ft. high W. of cor.  
Descend 54 ft. over N. slope  
Enter scattering cedar timber, bears E. and W.

## Subdivision of T 40 N., R1 E.

## Chains

68.00 Leave timber bears E. and W.  
 72.23 Wash 3 lks. wide 6 ft. deep, course N45°W.  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 24 ins. in the  
 ground to bedrock, supported by a mound of stone  
 1½ ft. base ½ ft. high for cor. of secs. 19, 20, 29,  
 and 30, marked on brass cap

T40N	R1E
S 19	S 20
S 30	S 29

1926

Raise a mound of stone 2 ft. base 1½ ft. high W. of cor.  
 Land, rolling.  
 Soil, sandy 4 th. rate.  
 Timber, scattering cedar and pinion.  
 Undergrowth, sagebrush.

40.00 S 89°53'E. on a random line bet. secs. 20 and 29.  
 Set temp. ¼ sec. cor.  
 79.98 Intersect N. and S. line at the cor. of secs. 20, 21, 28,  
 and 29.

Thence  
 N 89°53'W. on true line bet. secs. 20 and 29  
 Over rolling sandy land, through sagebrush undergrowth.  
 38.33 Wash 3 lks. wide 6 ft. deep, course N20°W.  
 39.99 Set an iron post 3 ft. long 1 in. in diam. 18 ins. in the  
 ground to bedrock, deposit a limestone 8x8x4 ins.  
 marked with a cross (x) alongside, and raise a  
 mound of stone 2 ft. base, 1½ ft. high around post  
 for ¼ sec. cor., marked on brass cap

¼	S 20
	S 29

1926

79.98 The cor. of secs. 19, 20, 29, and 30.  
 Land, rolling.  
 Soil, sandy 4 th. rate.  
 Timber, none.  
 Undergrowth, sagebrush.

40.00 N 89°56'W. on a random line bet. secs. 19 and 30.  
 Set temp. ¼ sec. cor.  
 77.90 Intersect the Gila and Salt River Meridian at the cor. of  
 secs. 19, 24, 25, and 30, which is an iron post 3 ins.  
 in diam. projecting 12 ins. above ground, firmly  
 set, properly marked on brass cap, and witnessed by  
 a mound of stone W.

Thence  
 S 89°56'E. on true line bet. secs. 19 and 30  
 Over rolling sandy land, through scattering pinion timber  
 and sagebrush undergrowth.  
 37.90 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in  
 the ground for ¼ sec. cor., marked on brass cap



Subdivision of T 40 N., R 1 E.

Chains

$\frac{1}{4}$  S 19  
 $\frac{1}{4}$  S 30  
1926

from which  
A pinion 6 ins. in diam. bears N80 $\frac{1}{4}$ °E. 260 lks. dist.,  
marked  $\frac{1}{4}$  S 19 BT.  
A pinion 8 ins. in diam. bears S84 $\frac{1}{2}$ °E. 222 lks. dist.,  
marked  $\frac{1}{4}$  S 30 BT.  
73.40 Wash 3 lks. wide 6 ft. deep, course N65°W.  
77.90 The cor. of secs. 19, 20, 29, and 30.  
Land, rolling.  
Soil, sandy 4 th. rate.  
Timber, scattering pinion.  
Undergrowth, sagebrush.

1.10 N 0°03'W. bet. secs. 19 and 20.  
40.00 Over rolling sandy land, through sagebrush undergrowth.  
Wash 3 lks. wide 6 ft. deep, course N85°W.  
Set an iron post 3 ft. long, 1 in. in diam. 6 ins. in the  
ground to bedrock, deposit a limestone 10x7x3  
ins. marked with a cross (x) alongside, and raise  
a mound of stone 4 ft. base 2 $\frac{1}{2}$  ft. high around  
post for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$   
S 19 | S 20  
1926

80.00 Set an iron post 3 ft. long 2 ins. in diam. 4 ins. in  
the ground to bedrock, deposit a limestone 10x8x4  
ins. alongside, and raise a mound of stone 4 ft.  
base 2 $\frac{1}{2}$  ft. high around post for cor. of secs.  
17, 18, 19, and 20. marked on brass cap

T40N | R1E  
S 18 | S 17  
S 19 | S 20  
1926

Land, rolling.  
Soil, sandy 4 th. rate.  
Timber, none.  
Undergrowth, sagebrush.

40.00 S 89°53'E. on a random line bet. secs. 17 and 20.  
80.00 Set temp.  $\frac{1}{4}$  sec. cor.  
Intersect N. and S. line 5 lks. S. of the cor. of secs.  
16, 17, 20, and 21.  
Thence  
N 89°55'W. on true line bet. secs. 17 and 20.  
Over rolling sandy land, through sagebrush undergrowth.

## Subdivision of T 40 N., R 1 E.

Chains

12.50 Grand Canyon highway, bears NW. and SE.  
40.00 Set an iron post 3 ft. long, 1 in. in diam. 8 ins. in the ground to bedrock, deposit a limestone 10x6x4 ins. marked with a cross (x) alongside, and raise a mound of stone 3 ft. base, 1½ ft. high around post for ¼ sec. cor., marked on brass cap

¼ S 17  
¼ S 20

1926

70.25 Wash, 5 lks. wide, 2 ft. deep, course N. 15° W.  
80.00 The cor. of secs. 17, 18, 19, and 20.  
Land, rolling.  
Soil, sandy 4 th. rate.  
Timber, none.  
Undergrowth, sagebrush.

40.00 N 89° 56' W. on a random line bet. secs. 18 and 19.  
Set temp. ¼ sec. cor.  
77.76 Intersect the Gila and Salt River Meridian 8 lks. S. of the cor. of secs. 13, 18, 19, and 24, which is an iron post 3 ins. in diam. projecting 26 ins. above ground supported firmly by a mound of earth and stone, properly marked on brass cap, and witnessed by a mound of stone W.

Thence  
36.06 S 89° 53' E. on true line bet. secs. 18 and 19.  
Over rolling sandy land, through sagebrush undergrowth.  
Road bears N. and S.  
37.76 Set an iron post 3 ft. long, 1 in. in diam. 16 ins. in the ground to bedrock, deposit a limestone 8x6x6 ins. marked with a cross (x) alongside, and raise a mound of stone 3 ft. base 1½ ft. high around post for ¼ sec. cor., marked on brass cap

¼ S 18  
¼ S 19

1926

77.76 The cor. of secs. 17, 18, 19, and 20.  
Land, rolling.  
Soil, sandy, 4 th. rate.  
Timber, none.  
Undergrowth, sagebrush.

40.00 N 0° 03' W. bet. secs. 17 and 18.  
Over rolling sandy land, through sagebrush undergrowth.  
Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for ¼ sec. cor., marked on brass cap.

¼ S 18 | S 17  
1926

## Subdivision of T 40 N., R 1 E.

Chains

74.70  
80.00

Raise a mound of stone 2 ft. base,  $1\frac{1}{2}$  ft. high W. of cor. Grand Canyon highway, bears N50°W. and S50°E.  
Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the ground for cor. of secs. 7, 8, 17, and 18. marked on brass cap

T40N	R1E
S 7	S 8
S 18	S 17
1926	

Raise a mound of stone 2 ft. base,  $1\frac{1}{2}$  ft. high W. of cor. Land, rolling.  
Soil, sandy 4 th. rate.  
Timber, none.  
Undergrowth, sagebrush.

40.00  
79.99

S 89°55'E. on a random line bet. secs. 8 and 17.  
Set temp.  $\frac{1}{4}$  sec. cor.  
Intersect N. and S. line 5 lks. N. of the cor. of secs. 8, 9, 16, and 17.

40.00

Thence  
N 89°53'W. on true line bet. secs. 8 and 17.  
Over rolling sandy land, through sagebrush undergrowth.  
Set an iron post 3 ft. long, 1 in. in diam. 4 ins. in the ground to bedrock, deposit a limestone 10x6x3 ins. marked with a cross (x) alongside, and raise a mound of stone 4 ft. base  $2\frac{1}{2}$  ft. high around post for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$	S 8
	S 17

1926

49.49  
66.58  
79.99

Old highway, bears N50°W. and S50°E.  
Wash 3 lks. wide 2 ft. deep; course N20°W.  
The cor. of secs. 7, 8, 17, and 18.  
Land, rolling.  
Soil, sandy 4 th. rate.  
Timber, none.  
Undergrowth, sagebrush.

40.00  
77.66

N 89°53'W. on a random line bet. secs. 7 and 18.  
Set temp.  $\frac{1}{4}$  sec. cor.  
Intersect the Gila and Salt River Meridian 2 lks. S. of the cor. of secs. 7, 12, 13, and 18, which is an iron post 3 ins. in diam. firmly set in a mound of earth and stone, properly marked on brass cap, and witnessed by a mound of stone W.

24.33

Thence  
S 89°52'E. on true line bet. secs. 7 and 18.  
Over rolling sandy land through sagebrush undergrowth.  
Wash 8 lks. wide 2 ft. deep, course N75°W.

## Subdivision of T 40 N., R 1 E.

Chains

37.66 Set an iron post 3 ft. long, 1 in. in diam. 18 ins. in the ground to bedrock, deposit a limestone 14x12x3 ins. marked with a cross (x) alongside, and raise a mound of stone 2½ ft. base 1½ ft. high around post for ¼ sec. cor. marked on brass cap

$$\frac{1}{4} \begin{array}{c} S 7 \\ S 18 \end{array}$$

1926

72.66 Grand Canyon highway, bears N45°W. and S45°E  
77.66 The cor. of secs. 7, 8, 17, and 18.

Land, rolling.  
Soil, sandy 4 th. rate.  
Timber, none.  
Undergrowth, sagebrush.

N 0°03'W. bet. secs. 7 and 8.  
Descend 103 ft. over N. slope over rolling sandy land through sagebrush undergrowth.

13.25 Wash 14 lks. wide 3 ft. deep, course N85°W.  
Ascend 59 ft. over S. slope.

18.95 Top of spur slopes W; thence over rolling land.

40.00 Set an iron post 3 ft. long, 1 in. in diam. 24 ins. in the ground to bedrock for ¼ sec. cor., marked on brass cap

$$\frac{1}{4} \begin{array}{c} S 7 \\ S 8 \end{array}$$

1926

45.00 Dig pits 18x18x12 ins. N. and S. of post 3 ft. dist.  
Road bears N30°W. and S30°E.

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the ground for cor. of secs. 5, 6, 7, and 8., marked on brass cap

$$\begin{array}{c|c} T40N & R1E \\ \hline S 6 & S 5 \\ \hline S 7 & S 8 \end{array}$$

1926

Dig pits 18x18x12 ins. in each sec. 3 ft. dist.  
Land, rolling.  
Soil, sandy 4 th. rate.  
Timber, none.  
Undergrowth, sagebrush.

40.00 S 89°53'E. on a random line bet. secs. 5 and 8.  
79.98 Set temp. ¼ sec. cor.  
Intersect N. and S. line 5 lks. S. of the cor. of secs. 4, 5, 8, and 9.

Subdivision of T 40 N., R 1 E.

Chains

Thence  
 N 89°55'W. on true line bet. secs.5 and 8.  
 Over rolling sandy land, through sagebrush undergrowth.  
 25.60 Old road bears N. and S.  
 25.80 Wash 6 lks. wide 1 ft. deep, course N.  
 39.99 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the  
 ground for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$  S 5  
 S 8  
 1926

79.98 Raise a mound of stone 3 ft. base 2 ft. high N. of cor.  
 The cor. of secs.5,6,7, and 8.  
 Land, rolling.  
 Soil, sandy 4 th. rate.  
 Timber, none.  
 Undergrowth, sagebrush.

40.00 N 89°52'W. on a random line bet. secs.6 and 7.  
 77.54 Set temp.  $\frac{1}{4}$  sec. cor.  
 Intersect the Gila and Salt River Meridian 5 lks. S. of  
 the cor. of secs.1,6,7, and 12, which is an iron  
 post 3 ins. in diam projecting 12 ins. above  
 ground, properly marked on brass cap, and witnessed  
 by a mound of stone W.

Thence  
 S 89°50'E. on true line bet. secs.6 and 7.  
 Over rolling sandy land, through sagebrush undergrowth  
 20.24 Wash 18 lks. wide 4 ft. deep, course N5°W.  
 37.54 Set an iron post 3 ft. long, 1 in. in diam. 4 ins. in the  
 ground to bedrock, deposit a limestone 14x10x4  
 ins. marked with a cross (x) alongside, and raise  
 a mound of stone 4 ft. base 2 $\frac{1}{2}$  ft. high around  
 post for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$  S 6  
 S 7  
 1926

77.54 The cor. of secs.5,6,7, and 8.  
 Land, rolling.  
 Soil, sandy 4 th. rate.  
 Timber, none.  
 Undergrowth, sagebrush.

40.00 N 0°03'W. on true line bet. secs.5 and 6.  
 Over rolling sandy land, through sagebrush undergrowth.  
 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in  
 the ground for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$   
 S 6 | S 5  
 1926

## Subdivision of T 40 N., R 1 E.

Chains

77.15  
80.28

Raise a mound of stone 2 ft. base,  $1\frac{1}{2}$  ft. high W. of cor.  
Wash 12 lks. wide 2 ft. deep, course N50°W.

Intersect the 10 th. St. Par. N. 2.51 chs. W. of the S.C. of  
secs. 31 and 32, T41N., R1E., which is an iron post  
2 ins. in diam. 32 ins. above ground supported by  
a mound of stone, properly marked on brass cap, and  
witnessed by a mound of stone N.

At point of intersection, Set an iron post 3 ft. long, 2 ins.  
in diam. 4 ins. in the ground to bedrock, deposit  
a limestone 10x6x4 ins. marked with a cross (x)  
alongside, and raise a mound of stone 5 ft. base  
 $2\frac{1}{2}$  ft. high around post for closing cor. of secs.  
5 and 6, marked on brass cap

T41N R1E

S 31

S 6 | S 5  
T40N R1E

CC

1926

Land, rolling.

Soil, sandy 4 th. rate.

Timber, none.

Undergrowth, sagebrush.

FINAL TEST OF YOUNG AND SONS TRANSIT NO. 8534

April 14, 1926, Set up instrument on the meridian estab-  
lished April 4, 1926 at the  $\frac{1}{4}$  sec. cor. of secs. 16  
and 21, T40N., R1E. described on page 2 of this book  
and at 9<sup>h</sup> 00<sup>m</sup> a.m. app. time, set off 36°51 $\frac{1}{2}$ ' N. on the  
lat. arc 9°21' N. on the decl. arc and determine a  
meridian with the solar which agrees with the true  
meridian.

At apparent noon with the lat. arc unchanged, observe the  
sun on the meridian, the resulting reading of the  
decl. arc is 9°21 $\frac{1}{2}$ ' N. which agrees with the computed  
declination of the sun.

h m

At 3 00 p.m. app. time with the lat. arc unchanged, set off  
9°24' N. on the decl. arc and determine a meridian  
with the solar, which is found to agree with the true  
meridian.

The solar apparatus by a.m., and p.m., observations defines  
positions for meridians which agree with the true  
meridian, therefore conclude that the instrument  
has maintained in satisfactory adjustment during  
the survey of T40N., R1E.

FINAL TEST OF BUFF TRANSIT NO. 9940.

April 24, 1926, Set up transit on the meridian, established  
April 4, 1926 at the  $\frac{1}{4}$  sec. cor. of secs. 16 and 21  
T40N., R1E. on which the preliminary test was made, and  
at 9<sup>h</sup> 00<sup>m</sup> a.m., app. time, set off 36°51 $\frac{1}{2}$ ' N. on the lat.  
arc, 12°46 $\frac{1}{2}$ ' N. on the decl. arc and determine a

Subdivision of T 40 N., R 1 E.

meridian with the solar, which is found to agree with the true meridian.

At the same station at apparent noon with the lat. arc unchanged, observe the sun on the meridian, the resulting reading of the decl. arc is 12°49' N. which agrees with the computed declination of the sun.

At 3<sup>h</sup> 00<sup>m</sup> p.m., app. time with the lat. arc unchanged, set off 12°51½' N. on the decl. arc and determine a meridian with the solar, which is also found to agree with the true meridian.

As all observations for meridian come within 1'30" of the true meridian; conclude that the adjustments of the instrument have been maintained during the survey of T40N., R1E.

Boundaries of Township 40 North., Range 1 East.

Latitudes, Departures, and Closing Errors.

Line Designated	True Course	Dist.	Latitudes		Departures	
			N	S	E	W
		Chs.	Chs.	Chs.	Chs.	Chs.
South Boundary	N89°58'W.	478.24	.28			478.24
West Boundary (G. & S.R. Mer.)	North	480.00	480.00			
North Boundary (10th. St. Par. N.)	East	477.30			477.30	
East Boundary	South	480.48		480.48		
Convergency	-----				.54	
<b>Totals-----</b>			<b>480.28</b>	<b>480.48</b>	<b>477.84</b>	<b>478.24</b>
<b>Error in latitude-----</b>				<b>480.28</b>		<b>477.84</b>
<b>Error in departure-----</b>				<b>0.20</b>		<b>0.40</b>

General Description

The land embraced in this township comprises three kinds rolling, hilly, and mountainous and the soil can nearly all be classed as fourth rate.

The land is highest over the mountainous area in the southeastern part of the township and slopes in a general northwesterly direction in the direction of the drainage.

Numerous ravines and sand washes which head in the mountainous portion of the township and flow in a westerly and northwesterly direction, form the principal drainage of the land in the township.

The township is poorly watered, there being no permanent springs or other sources of living water in the township.

The hilly and mountainous portions of the township are covered with a heavy growth of cedar and pinion timber the trees, however being too small to be of any commercial value, except for fencing and fuel purposes.

The soil, which for the most part, is a loose sandy or stony loam unfit for agricultural purposes, supports a fair growth of nutritious grass which afford excellent feed for cattle, horses, and sheep, thus adapting the township as a whole to the stock raising industry.

There are no permanent settlers residing in the township at this time.



4-680

FIELD ASSISTANTS.

TO

Benjamin J Kinsey, U.S. Surveyor and David M Daugherty, U.S. Transitman.

NAMES.	CAPACITY.
Clifford E Way	First chainman
Clyde Cowper	First chainman
Owen Wright	Second chainman
Chester Stewart	Second chainman
Earl Endicott	Flagman
Tom Pearce	Flagman
Vern Hillyers	Cornerman.
Jack Meyers	Cornerman
Frank Kiefer	Axman

CERTIFICATE OF UNITED STATES SURVEYORS.

We { Benjamin J. Kinsey, U.S. Surveyor and } hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 126, Arizona

bearing date of the fourth day of January, 1924, we have well, faithfully, and truly in our own proper persons, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the East boundary and Subdivision lines of

Township 40 North, Range 1 East

of the Gila and Salt River

Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by us, and under our direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 126, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place: Phoenix Arizona Date: February 4, 1927 Benjamin J. Kinsey U.S. Surveyor. Place: Carlsbad New Mexico Date: February 12, 1927 David M. Daugherty U.S. Transitman.

APPROVAL.

OFFICE OF THE U.S. SUPERVISOR OF SURVEYS,

Denver, Colo., April 29, 1927.

The foregoing field notes of the survey of the EAST boundary and SUBDIVISION LINES of Township 40 North, Range 1 East of the Gila and Salt River Base and Meridian in the State of Arizona

executed by Benjamin J. Kinsey, U.S. Surveyor and David M. Daugherty, U.S. Transitman under the special instructions dated January 4, 1924 for Group 126, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Signature of U.S. Supervisor of Surveys

I certify that the foregoing transcript of the field notes of the above described surveys in has been correctly copied from the original notes on file in this office.

U.S. Surveyor General