

BOOK 3780

FIELD NOTES

OF THE SURVEY OF THE

East, West, and North, boundaries and Subdivision lines of

Township 34 North., Range 12 West

3780

3780

Of the Gila and Salt River Base and Meridian,

In the State of ARIZONA

EXECUTED BY

Benjamin J Kinsey

In the capacity of U. S. Surveyor, under Special Instructions dated May 4, 1926,
District Cadastral Engineer
issued by the United States Surveyor General, to govern surveys included in Group
No. 137 Arizona, which were approved by the Commissioner of the General Land
Office, May 17, 1926, and Assignment Instructions dated April 16, 1926

Survey commenced June 10, 1926

Survey completed July 7, 1926


1A

Book "D"

Group 137- Arizona

BOOK 3780


INDEX DIAGRAM.

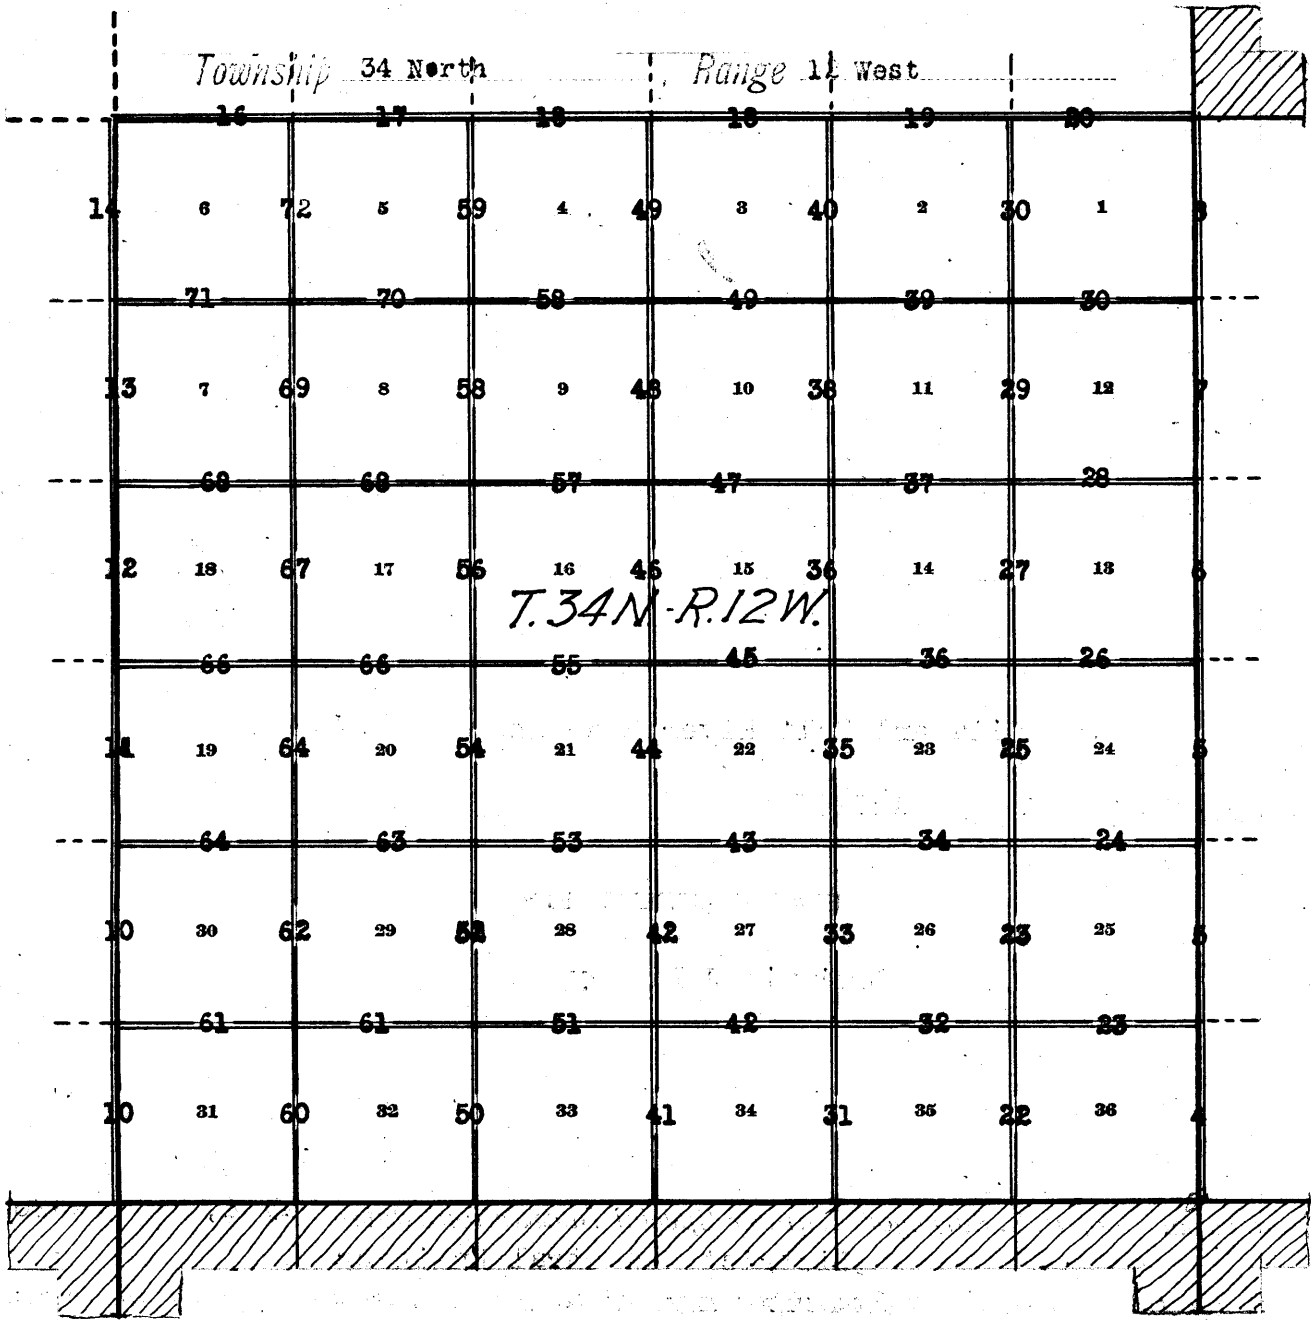

————— Surveyed under this group.

————— Accepted surveys.

- - - - - Unsurveyed.

 Areas surveyed as per accepted plats on file.

15

BOOK 3780

BOOK "D"

Group 137 Arizona

Township 34 N., Range 12 W.

1926

DATE DIAGRAM

	7-6-26	7-6-26	7-5-26	7-5-26	7-5-26	7-5-26	
7-6-26	6	5	4	3	2	1	
	7-4-26	7-4-26	6-24-26	6-24-26	6-24-26	6-17-26	6-12-26
7-6-26	7	8	9	10	11	12	
	7-2-26	7-2-26	6-29-26	6-24-26	6-24-26	6-17-26	6-12-26
6-30-26	18	17	16	15	14	13	
	6-30-26	7-2-26	6-29-26	6-23-26	6-23-26	6-16-26	6-11-26
6-30-26	19	20	21	22	23	24	
	7-1-26	7-2-26	6-29-26	6-28-26	6-22-26	6-16-26	6-11-26
6-30-26	30	29	28	27	26	25	
	6-30-26	6-27-26	6-29-26	6-26-26	6-22-26	6-15-26	6-11-26
6-30-26	31	32	33	34	35	36	
	6-27-26	6-27-26	6-26-26	6-22-26	6-15-26		6-11-26

S. bdy. of Tp. surveyed by W.H. Thorn, U.S.S. in 1917

The surveys hereinafter described were commenced on June 10, 1926 and executed on the dates shown on diagram on page 1 hereof, by Benjamin J Kinsey, U.S. Surveyor, using Buff "Rocky Mountain Favorite" solar transit No. 9940 with U-shaped standards, $4\frac{1}{2}$ inch horizontal circle, 4 inch vertical circle and improved Smith solar attachment. The horizontal limb is provided with two double verniers placed opposite to each other, reading to single minutes of arc which is also the least count of the verniers of the latitude and declination arcs.; unless otherwise specified all azimuth determinations are accomplished with the solar attachment, except the special observations on Polaris for meridian upon which to test the solar apparatus, as stated in the field notes.

The instrument was examined, tested on the true meridian at the Federal Building at Phoenix Arizona, found correct, and was approved by the District Cadastral Engineer for Arizona and California, March 13, 1926 conditional upon satisfactory field tests.

PRELIMINARY FIELD TEST OF INSTRUMENT.

Examine the adjustments of the transit and find no errors. then, in order to test the solar apparatus, by comparing its indications, resulting from solar observations, made during a.m., and p.m., hours with a meridian established by observations on Polaris; proceed as follows;

June 10, 1926, At camp near the cor. of secs. 20, 21, 28, and 29 T. 34 N., R. 12 W., G. & S. R. B. & M., Arizona, in latitude $36^{\circ}18'N$, and longitude $113^{\circ}34'W$. At 9 00 a.m., app. time, set off $36^{\circ}18'N$ on the lat. arc $23^{\circ}00'N$ on the decl. arc and determine a meridian with the solar and mark a point thereof by a tack driven in a stake set firmly in the ground about 5-chs. N.

At apparent noon with the lat. arc unchanged, observe the sun on the meridian. The resulting reading on the decl. arc is $23^{\circ}00\frac{1}{2}'N$, which agrees closely with the computed declination of the sun.

At the same station, At $3^h 00^m$ p.m., app. time with the lat. arc unchanged, set off $23^{\circ}01\frac{1}{2}'N$ on the decl. arc and determine a meridian with the solar, which is found to agree with the meridian established with the solar this a.m.

June 11, 1926, At $2^h 21.7^m$ a.m., l.m.t., observe Polaris at eastern elongation, making four observations, two each with telescope in direct and reversed position and mark the mean point in the line thus determined by a tack in peg driven firmly in the ground about 5-chs. N.

Azimuth of Polaris at eastern elongation = $1^{\circ}21'38''$

At $7^h 00^m$ a.m., lay off the azimuth of Polaris $1^{\circ}21\frac{1}{2}'$ to the west and mark the true meridian thus determined by a small nail driven in the stake already set about 5-chs. N. on which the meridian falls in substantial agreement with the meridian determined by the solar observations.

As all the solar observations, during the usual hours of solar work agree with the true meridian established by the Polaris observations, conclude that the adjustments of the instrument are satisfactory.

All measurements are made with a Lufkin 5-chain steel tape compared with a Chesterman standard steel tape and found correct. The measurements are made on the slope, the vertical angles determined with a clinometer, and the slope measurements properly reduced to true horizontal distances.

East boundary of T.34 N., R.12 W.

Chains

Begin at the cor. of Ts. 33 and 34 N., Rs. 11 and 12 W., established in 1917 by Loyd E Sechrist, U.S. Transitman, under Group No. 73 Arizona, which is an iron post 3 ins. in diam. projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by four pits on line N.E.S. and W. of cor.

Thence

North on a random line along the E. bdy. of Tp. 34 N., R. 12 W. setting temp. $\frac{1}{4}$ sec. and sec. cors. alternatively at intervals of 40.00 chs.; and at 479.00 chs. intersect E. and W. line 96 lks. E. of the cor. of Ts. 34 and 35 N., Rs. 11 and 12 W. hereinafter described. The falling answers to a correction of $0^{\circ}7'$ or 16 lks. per mile counting from the SE. cor. of the Tp.

Return to the cor. of Ts. 33 and 34 N., Rs. 11 and 12 W.

Thence

N $0^{\circ}07'$ W. on true line bet. secs. 31 and 36.

Over rolling sandy land in valley.

17.50

Wash 10 lks. wide course SE.

22.60

Road to Hurricane Valley, bears NW. and SE.; leave rolling valley land bears NW. and SE.; Enter hilly land and scattering timber.

Ascend 34 ft. over SW. slope.

40.00

Top of spur, slopes SW.; Set an iron post 3 ft. long, 1 in in diam. 8 ins. in the ground to bedrock, supported in a mound of stone for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$
 S 36 | S 31
 1926

from which,

A cedar 20 ins. in diam. bears S 33° E. 29 lks. dist., marked $\frac{1}{4}$ S31 BT.A cedar 8 ins. in diam. bears S 30° W. 50 lks. dist., marked $\frac{1}{4}$ S36 BT.

Descend slightly over NW. slope.

60.00

Shallow draw, course SW.

Ascend 29 ft. over SE. slope.

70.00

Top of ridge bears N. and SE. thence along top of ridge ascending.

80.00

Set an iron post 3 ft. long, 2 ins. in diam. 12 ins. in the ground to bedrock, supported in a mound of stone for cor. of secs. 25, 30, 31, and 36. marked on brass cap

T34N
 R12W | R11W
 S 25 | S 30
 S 36 | S 31

1926

from which,

A cedar 14 ins. in diam. bears N 59° E. 238 lks. dist., marked T34N., R11W. S30 BT.A cedar 10 ins. in diam. bears S 7° E. 200 lks. dist., marked T34N., R11W., S31 BT.A cedar 12 ins. in diam. bears S 89° W. 88 lks. dist., marked T34N., R12W., S36 BT.

East boundary of T.34 N., R.12 W.

Chains

A cedar 15 ins. in diam. bears N58°W.42 lks. dist.,
marked T34N.,R12W.,S25 BT.

Land,rolling and hilly.
Soil,sandy and stony 4 th. rate.
Timber,cedar and pinion.
Undergrowth,sagebrush.

40.00

N 0°07'W. bet. secs. 25 and 30.
Over rolling land along top of ridge,through cedar and
pinion timber.
Set an iron post 3 ft. long, 1 in.in diam.26 ins.in the
ground for $\frac{1}{4}$ sec. cor.marked on brass cap

1
↑
S 25 | S 30

1926

from which,

A pinion -ins.in diam.bears S70°E.38 lks. dist.,
marked $\frac{1}{4}$ S30 BT.

A pinion -ins.in diam.bears S26°W.58 lks. dist.,
marked $\frac{1}{4}$ S25 BT.

65.00

Leave top of ridge bears NE.
Descend 40 ft. over NW.slope over rolling land.

75.50

Wash 50 lks. wide 2 ft. deep,course W.

Ascend 23 ft. over S.slope to

80.00

Top of spur slopes W.;Set an iron post 3 ft. long, 2 ins.
in diam.4 ins. in the ground to bedrock,
supported in a mound of stone for cor. of secs.
19,24,25,and 30.marked on brass cap

T 34 N
R12W | R11W
S 24 | S 19

S 25 | S 30

1926

from which,

A cedar 4 ins. in diam. bears N24°E. 36 lks. dist.,
marked T34N.,R11W.,S19 BT.

A pinion 10 ins. in diam. bears S51°E.58 lks. dist.,
marked T34 N.,R11W.,S30 BT.

A cedar 8 ins. in diam. bears S22°W.187 lks.dist.,
marked T34N.,R12W.,S25 BT.

A cedar 11 ins. in diam.bears N70°W.95 lks.dist.,
marked T34N.,R12W.,S24 BT.

Land,rolling.
Soil,sandy and stony 3 rd. and 4 th. rate.
Timber,cedar and pinion.
Undergrowth,sagebrush.

N 0°07'W. bet. secs.19 and 24.
Descend NW. slope over rolling land through scattering
timber.

East boundary of T.34 N., R.12 W.

Chains

- 2.00 Wash course W.
Ascend slightly over S. slope.
5.00 Top of low spur, slopes W.
Descend gradually over N. slope.
13.00 Bottom of shallow draw, course W.
22.50 Top of spur, slopes NE.
Descend 127 ft. over NW. slope.
40.00 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in
the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 S 24 | S 19
 1926

from which,

- A cedar 14 ins. in diam. bears N22°E. 235 lks. dist.,
marked $\frac{1}{4}$ S19 BT.
A cedar 12 ins. in diam. bears S65°W. 416 lks. dist.,
marked $\frac{1}{4}$ S24 BT.
62.50 Wash 50 lks. wide 3 ft. deep course NE.
Ascend 109 ft. over SE. slope.
75.00 Top of ridge bears NE. and W.
Descend 23 ft. over NW. slope. to
80.00 Set an iron post 3 ft. long, 2 ins. in diam. with marked
stone at the base, 6 ins. in the ground to bedrock
supported in a mound of stone for cor. of secs.
13, 18, 19, and 24. marked on brass cap

T34N
 R12W | R11W
 S 13 | S 18
 S 24 | S 19
 1926

from which,

- A cedar, 10 ins. in diam. bears N4 $\frac{1}{2}$ °E. 347 lks. dist.,
marked T34N., R11W., S18 BT.
A cedar, 12 ins. in diam. bears S56 $\frac{1}{2}$ °E. 146 lks. dist.,
marked T34N., R11W., S19 BT.
No other bearing trees available.

Land, rolling.
Soil, sandy and stony 3 rd. and 4 th. rate.
Timber, cedar and pinion.
Undergrowth, sagebrush.

- N 0°07'W. on true line bet. secs. 13 and 18.
Descend 40 ft. over NW. slope over rolling land, through
scattering cedar and pinion timber.
7.20 Wash course NE.
Ascend 40 ft. over SE. slope.
15.00 Top of spur slopes E.
Descend 81 ft. over N. slope.
31.73 Wash course NE. in bottom of canyon bears NE. and W.
Ascend 103 ft. over SE. slope.
40.00 Top of spur slopes E.; Set an iron post 3 ft. long 1 in.
in diam. 12 ins. in the ground to bedrock,
supported in a mound of stone for $\frac{1}{4}$ sec. cor.
marked on brass cap

East boundary of T.34 N., R.12 W.

Chains

$\frac{1}{2}$
 |
 S 13 | S 18
 |
 1926

from which,

- A cedar 12 ins. in diam. bears N89°E.221 lks. dist., marked $\frac{1}{2}$ S18 BT.
- A cedar 10 ins. in diam. bears N41°W.325 lks. dist., marked $\frac{1}{4}$ S13 BT.
- Descend 107 ft. over NE. slope.
- 66.95 Wash 11 lks. wide course NE.
- Ascend 74 ft. over SE. slope
- 75.00 Top of spur slopes NE.
- Descend slightly over NW. slope to
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 14 ins. in the ground to bedrock, deposit a stone marked with a cross (x) at base, and raise a mound of stone around post for cor. of secs. 7, 12, 13, and 18. marked on brass cap

T34N
 R12W | R11W
 S 12 | S 7
 S 13 | S 18

1926

from which,

- A cedar 10 ins. in diam. bears N45°E.497 lks. dist., marked T34N., R11W., S7 BT.
- A cedar 14 ins. in diam. bears S48°W.70 lks. dist., marked T34N., R12W., S13 BT.
- A cedar 8 ins. in diam. bears N37°W.91 lks. dist., marked T34N., R12W., S12 BT.
- No other bearing trees available.

Land, rolling.
 Soil, sandy and stony 3 rd. and 4 th. rate.
 Timber, cedar and pinion.
 Undergrowth, sagebrush.

- N 0°07'W. on true line bet. secs. 7 and 12.
- Descend 52 ft. over NE. slope over rolling land, through scattering cedar and pinion timber.
- 13.00 Head of wash 15 lks. wide 2 ft. deep, course NW.
- Ascend slightly over SW. slope.
- 15.00 Top of spur slopes W.
- Descend 98 ft. over N. slope.
- 18.18 Cross the Parashont wash 100 lks. wide 3 ft. deep, course NE.
- Ascend 226 ft. over SE. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$
 |
 S 12 | S 7
 |
 1926

1926

from which

East boundary of T.34 N.,R.12 W.

Chains	
	A cedar 6 ins. in diam. bears N52°E.72 lks. dist., marked $\frac{1}{4}$ S7 BT.
	A cedar 14 ins. in diam. bears S68°W.117 lks. dist., marked $\frac{1}{4}$ S12 BT.
49.00	Top of spur slopes SW.
	Descend 23 ft. over NW. slope.
56.00	Bottom of draw 20 lks. wide course SW.
	Ascend 23 ft. over SE. slope.
63.50	Top of ridge, bears NW. and SE.
	Descend slightly over NE. slope.
76.00	Bottom of draw 30 lks. wide course SE.
	Ascend slightly over SW. slope
80.00	Set an iron post 3 ft. long, 2 ins. in diam. with stone marked with a cross (x) at the base 12 ins. in the ground to bedrock, and raise a mound of stone around post for cor. of secs. 1,6,7, and 12. marked on brass cap

T34N	
R12W	R11W
S 1	S 6
S 12	S 7

1926

from which,

- A cedar 12 ins. in diam. bears N5°E.75 lks. dist., marked T34N., R11W., S6 BT.
- A cedar 8 ins. in diam. bears S10°E.75 lks. dist., marked T34N., R11W., S7 BT.
- A cedar 12 ins. in diam. bears S50°W.80 lks. dist., marked T34N., R12W., S12 BT.
- A cedar 11 ins. in diam. bears N66 $\frac{1}{2}$ °W.79 lks. dist., marked T34N., R12W., S1 BT.

Land, rolling mountainous.
Soil, sandy and stony 3 rd. and 4 th. rate.
Timber, cedar and pinion.
Undergrowth,

	N 0°07'W. on true line bet. secs. 1 and 6.
	Ascend slightly over S. slope over rolling land, through scattering timber.
-3.43	Old road to Hurricane valley bears E. and W.
8.20	Top of spur bears NW. and SE.
	Descend over NE. slope.
11.50	Wash 10 lks. wide 3 ft. deep, course SE.
	Ascend 250 ft. over SE. slope.
28.50	Top of spur, slopes SE.
	Descend NE. slope:
33.50	Wash 15 lks. wide 3 ft. deep, course SE.
	Ascend 293 ft. over SW. slope over stony mountainous land
40.00	Set an iron post 3 ft. long, 1 in. in diam. 12 ins. in the ground to bedrock, supported in a mound of stone for $\frac{1}{4}$ sec. cor. marked on brass cap

S 1	S 6
-----	-----

1926

from which,


East boundary of T.34 N., R.12 W.

Chains	A pinion 8 ins. in diam. bears $380^{\circ}E$. 91 lks. dist., marked $\frac{1}{4}$ S6 BT.
	A cedar 12 ins. in diam. bears $N89^{\circ}W$. 49 lks. dist., marked $\frac{1}{4}$ S1 BT.
48.00	Top of Poverty Mountain bears $N60^{\circ}W$. and E., thence over rolling land.
55.20	Descend 112 ft. over steep N. slope.
58.83	Gulch 100 lks. wide 3 ft. deep, course W.
	Ascend 142 ft. over S. slope
64.20	Top of ascent on S. edge of mesa bears NW. and SE. thence over level land on top of mesa.
74.90	North edge of mesa, bears E. and W.
	Descend 116 ft. over broken stony N. slope.
77.10	Rocky ravine 100 lks. wide 3 ft. deep, course W.
	Ascend 53 ft. over steep rocky S. slope to
79.00	Intersect the cor. of Ts. 34 and 35 N., Rs. 11 and 12 W. established by William E. Hiestler, U.S. Surveyor, in 1924 under Group No. 122. which is an iron post 3 ins. in diam. 22 ins. above ground, firmly set in a mound of stone and properly marked on brass cap. and witnessed by four bearing trees, one in each sec. NE., SE., SW., and NW. of cor.
	<p>Land, rolling and mountainous. Soil, stony 4 th. rate. Timber, cedar and pinion. Undergrowth, oak and sagebrush.</p>

West boundary of T.34 N., R.12 W.


Chains

- From the cor. of Ts. 33 and 34 N., Rs. 12 and 13 W. established in 1917, by William H Thorn, U.S. Surveyor, under Group No. 73 Arizona, which is an iron post 3 ins. in diam. projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by four bearing trees, one in each sec. NE., SE., SW., and NW. of cor.
- North bet. secs. 31 and 36.
- Descend NW. slope over rolling land through scattering timber.
- 4.60 Wash 20 lks. wide 2 ft. deep, course NE.
- Ascend over SE. slope
- 10.00 Top of spur slopes SE.
- Descend over NE. slope.
- 12.00 Shallow draw 10 lks. wide course SE.
- 27.00 Shallow ravine 10 lks. wide course NW.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



from which,

- A cedar 14 ins. in diam. bears N15°E. 54 lks. dist., marked $\frac{1}{4}$ S31 BT.
- A cedar 8 ins. in diam. bears S27°W. 68 lks. dist., marked $\frac{1}{4}$ S36 BT.
- 45.00 Shallow ravine 10 lks. wide course E.
- Ascend slightly over S. slope.
- 50.00 Top of ridge bears NW. and SE.
- Descend slightly over NE. slope.
- 73.50 Shallow draw 20 lks. wide course SE.
- Ascend over SW. slope. in diam., 24 ins.
- 80.00 Set an iron post 3 ft. long, 2 ins. in the ground for cor. of secs. 25, 30, 31, and 36. marked on brass cap



from which,

- A cedar 11 ins. in diam. bears N8°E. 263 lks. dist., marked T34N., R12W., S30 BT.
- A cedar 14 ins. in diam. bears S73°E. 232 lks. dist., marked T34N., R12W., S31 BT.
- A cedar 10 ins. in diam. bears S86°W. 94 lks. dist., marked T34N., R13W., S36 BT.
- A cedar 20 ins. in diam. bears N8°W. 268 lks. dist., marked T34N., R13W., S25 BT.

Land, rolling.
Soil, sandy and stony 3 rd. and 4 th. rate.
Timber, cedar and pinion.
Undergrowth, sagebrush and cactae.


North bet. secs. 25 and 30.
Ascend over S. slope over rolling sandy and stony land,

West boundary of T.34 N., R.12 W.

Chains


through cedar and pinion timber.

- 5.00 Top of spur slopes SE.
- Descend over NE. slope.
- 10.00 Draw 10 lks. wide course NE.
- Ascend over SE. slope.
- 20.00 Top of spur slopes E.
- Descend over N. slope. 23 ft.
- 30.10 Wash 100 lks. wide 2 ft. deep, course E.
- Ascend Over S. slope.
- 35.00 Top of spur slopes SE.
- Descend over NE. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap



from which,

- A cedar 8 ins. in diam. bears S26°E. 172 lks. dist., marked $\frac{1}{4}$ S30 BT.
- A cedar 12 ins. in diam. bears S6°W. 174 lks. dist., marked $\frac{1}{4}$ S25 BT.
- 41.80 Wash 20 lks. wide 2 ft. deep, course SE.
- Ascend 23 ft. over SW. slope.
- 70.00 Top of spur, slopes SE.
- Descend over NE. slope.
- 79.00 Draw 20 lks. wide course NE.
- Ascend over SE. slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 24 ins. in the ground for cor. of secs. 19, 24, 25, and 30. marked on brass cap



from which,

- A cedar 4 ins. in diam. bears N60°E. 221 lks. dist., marked BT. only.
- A pinion 14 ins. in diam. bears S17°E. 298 lks. dist., marked T34N., R12W., S30 BT.
- A cedar 20 ins. in diam. bears S33°W. 212 lks. dist., marked T34N., R13W., S25 BT.
- A cedar 8 ins. in diam. bears N10°W. 222 lks. dist., marked T34N., R13W., S24 BT.

Land, rolling.
 Soil, sandy and stony 3 rd. rate.
 Timber, cedar and pinion.
 Undergrowth, sagebrush and cactae.

North bet. secs. 19 and 24.
 Ascend SE. slope over rolling sandy land through cedar and pinion timber.

- 5.00 Top of spur slopes SE.
- Descend over NE. slope.
- 12.20 Wash course E.
- Ascend over S. slope.

West boundary of T.34 N., R.12 W.

Chains.

40.00 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

↑
S 24 | S 19

1926

from which,

A cedar 12 ins. in diam. bears N51°E. 154 lks. dist., marked $\frac{1}{4}$ S19 BT.

A cedar 14 ins. in diam. bears N44°W. 183 lks. dist., marked $\frac{1}{4}$ S24 BT.

42.00 Top of spur slopes SE.

Descend over NE. slope

49.70 Wash 20 lks. wide 2 ft. deep, course SE.

Ascend 34 ft. over SW. slope

54.40 Road bears NW. and SE.

55.00 Top of spur, slopes SE.

Descend 34 ft. over NE. slope.

63.30 Wash 20 lks. wide 2 ft. deep, course SE.

Ascend over SE. slope.

80.00 Top of spur slopes SE.; Set an iron post 3 ft. long 2 ins.

in diam. 12 ins. in the ground to bedrock

supported in a mound of stone for cor. of secs.

13, 18, 19, and 24. marked on brass cap

T34N
R13W | R12W
S 13 | S 18

S 24 | S 19

1926

from which;

A cedar 12 ins. in diam. bears N73 $\frac{1}{2}$ °E. 208 lks. dist., marked T34N., R12W., S18 BT.

A pinion 16 ins. in diam. bears S43°E. 209 lks. dist., marked T34N., R12W., S19 BT.

A cedar 10 ins. in diam. bears S1°W. 293 lks. dist., marked T34N., R13W., S24 BT.

A cedar 4 ins. in diam. bears N83°W. 17 lks. dist., marked BT. only.

Land, rolling.

Soil, sandy and stony 3. rd. and 4 th. rate.

Timber, cedar and pinion.

Undergrowth, sagebrush and cactae.

North bet. secs. 13 and 18.

Descend over NE. slope over rolling sandy land through cedar and pinion timber.

2.50 Draw 15 lks. wide course SE.

Ascend over SW. slope.

13.01 Top of ridge bears NW. and SE.


Descend 52 ft. over NE. slope.

15.00 Center of old lake bed about 4.00 chs. in diam.

40.00 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap


West boundary of T.34 N., R.12 W.

Chains



from which,

- A cedar 20 ins. in diam. bears S60°E.157 lks. dist., marked $\frac{1}{4}$ S18 BT.
- A cedar 8 ins. in diam. bears S8°W.146 lks. dist., marked $\frac{1}{4}$ S13 BT.
- 41.50 Wash 20 lks. wide 2 ft. deep, course NE.
- Ascend 23 ft. over SE. slope.
- 45.00 Top of spur slopes E.
- Descend 34 ft. over N. slope.
- 52.80 Wash 20 lks. wide 2 ft. deep, course E.
- Ascend 58 ft. over S. slope.
- 71.00 Top of spur, slopes SE.
- Descend over NE. slope.
- 75.00 Bottom of shallow ravine course SE.
- Ascend over SW. slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 26 ins. in the ground for cor. of secs. 7, 12, 13, and 18. marked on brass cap




from which,

- A cedar 20 ins. in diam. bears N4°E.445 lks. dist., marked T34 N., R12W., S7 BT.
- A cedar 15 ins. in diam. bears S34°E.109 lks. dist., marked T34N., R12W., S18 BT.
- A cedar 4 ins. in diam. bears S33°W.48 lks. dist., marked BT. only.
- A cedar 10 ins. in diam. bears N61°W.114 lks. dist., marked T34N., R13W., S12 BT.

Land, rolling.
 Soil, sandy and stony 3 rd. and 4 th. rate.
 Timber, cedar and pinion.
 Undergrowth, sagebrush.

- North bet. secs. 7 and 12.
- Ascend SW. slope over rolling stony land, through cedar and pinion timber.
- 2.00 Top of ridge bears NE. and SW.
- Descend over NW. slope.
- 20.60 Bottom of draw 20 lks. wide course NE. thence over rolling E. slope.
- 39.00 Road to hidden lake bears NW. and SE.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 24 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



West boundary of T.34 N.,R.12 W.

Chains

from which

- A cedar 12 ins. in diam. bears S2°E.347 lks. dist., marked $\frac{1}{4}$ S7 BT.
- A cedar 14 ins. in diam. bears S3 $\frac{1}{2}$ °W.310 lks. dist., marked $\frac{1}{4}$ S12 BT.
- 40.50 Bottom of draw 20 lks. wide course NE. Ascend over SE.slope.
- 52.00 Top of low spur slopes E. Descend over N. slope.
- 55.00 Bottom of shallow draw 15 lks. wide course E. Ascend S. slope.
- 70.00 Top of spur, slopes SE. Descend over NE. slope.
- 72.00 Wash 20 lks. wide 2 ft. deep, course SE. Ascend 29 ft. over SW.slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 24 ins. in the ground for cor. of secs. 1,6,7, and 12. marked on brass cap

T34N	
R13W	R12W
S 1	S 6
S 12	S 7
1926	

from which,

- A cedar 10 ins. in diam. bears N20°E.114 lks. dist., marked T34N.,R12W.,S6 BT.
- A cedar 16 ins. in diam. bears S8°E.118 lks. dist., marked T34N.,R12W.,S7 BT.
- A cedar 10 ins. in diam. bears S58°W.57 lks. dist., marked T34 N.,R13W.,S12 BT.
- A cedar 14 ins. in diam. bears N7°W.115 lks. dist., marked T34N.,R13W.,S1 BT.

Land, rolling.
Soil, sandy and stony 3 rd. and 4 th. rate.
Timber, cedar and pinion.
Undergrowths sagebrush and cactae

- North bet. secs. 1 and 6. Ascend SE.slope over rolling sandy land through crdar and pinion timber.
- 12.00 Top of low spur, slopes SE. Descend over NE. slope.
- 26.00 Ravine 20 lks. wide course SE. Ascend over SW. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 10 ins. in the ground to bedrock, supported in a mound of stone for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$	
S 1	S 6
1926	

from which

- A cedar 40 ins. in diam. bears S35°E.47 lks. dist., marked $\frac{1}{4}$ S6 BT.
- A cedar 12 ins. in diam. bears S64°W.77 lks. dist., marked $\frac{1}{4}$ S1 BT.

West boundary of T.34 N.,R.12 W.

Chains

- 41.00 Top of ridge bears NW. and SE.
 Descend over NE. slope.
- 55.00 Bottom of shallow draw 20 lks. wide course NW. from S20°W.
 Ascend over SW. slope.
- 78.65 Intersect random N. bdy. of T34N., R12 W. run due west from
 the orig. cor. of Ts. 34 and 35 N., Rs. 11 and 12 W.
 as hereinafter described.
- At this point of intersection,
 Set an iron post 3 ft. long, 3 ins. in diam. 26 ins. in the
 ground for cor. of Ts. 34 and 35 N., Rs. 12 and 13 W.
 marked on brass cap

T 35 N	
R13W	R12W
S 36	S 31
S 1	S 6
T 34 N	
1926	

- from which,
- A cedar 14 ins. in diam. bears N32°E. 92 lks. dist.,
 marked T35N., R12W., S31 BT.
- A cedar 6 ins. in diam. bears S71°E. 56 lks. dist.,
 marked T34N., R12W., S6 BT.
- A cedar 30 ins. in diam. bears S25°W. 268 lks. dist.,
 marked T34N., R13W., S1 BT.
- A cedar 10 ins. in diam. bears N51°W. 103 lks. dist.,
 marked T35N., R13W., S36 BT.

Land, rolling.
 Soil, sandy 3 rd. rate.
 Timber, cedar and pinion.
 Undergrowth, sagebrush and cactae.

North boundary of T.34 N.,R.12 W.

Chains From the cor. of Ts.34 and 35 N.,Rs.11 and 12 W.hereinbefore described,
 West on a random line along the N.bdy.of T.34 N.,R.12 W. setting temp.¹/₄ sec. and sec.cors.alternately at intervals of 40.00 chs.;and at 478.30 chs. intersect the west boundary of T.34 N.,R.12 W. surveyed due.north 478.65 chs.from the cor. of Ts.33 and 34 N.,Rs.12 and 13 W.
 At the point of intersection,establish the cor. of Ts. 34 and 35 N.,Rs.12.and 13 W.,as hereinbefore described..
 Thence
 East on true line bet. secs.6 and 31
 Descend NE.slope over rolling sandy land through cedar and pinion timber.
 1.50 Draw 10 lks. wide course NE.
 Ascend over NW. slope
 3.30 Top of low spur slopes NW.
 Descend over NE. slope.
 4.80 Bottom of draw 20 lks. wide,course NE.
 Ascend over NW. slope.
 13.30 Top of spur slopes NE.
 Descend 23 ft. over SE. slope.
 24.30 Draw 20 lks. wide course NE.
 Ascend 23 ft. over NW. slope.
 36.30 Top of spur slopes NE.
 Descend 29 ft. over SE.slope.
 38.30 Set an iron post 3 ft. long, 1 in. in diam.12 ins.in the ground to bedrock,supported in a mound of stone for ¹/₄ sec. cor.,marked on brass cap

$\frac{1}{4}$ S 31
 S 6
 1926

from which,

A cedar 10 ins.in diam. bears N33°W.42 lks. dist., marked $\frac{1}{4}$ S31 BT.
 A pinion 8 ins. in diam.bears S23°W.22 lks. dist., marked $\frac{1}{4}$ S6 BT.
 47.30 Wash 20 lks. wide 2 ft. deep,course NE.
 Ascend 46 ft. over NW. slope.
 60.30 Top of ridge bears NE. and SW.
 Descend 57 ft. over SE.slope.
 76.00 Ravine course NE.
 Ascend over NW.slope.
 78.30 Set an iron post 3 ft. long,2 ins. in diam.18 ins.in the ground to bedrock,supported in a mound of stone for cor. of secs.5,6,31,and 32.marked on brass cap

T35N	R12W
S 31	S 32
S 6	S 5

T34N
 1926

from which,

A cedar 10 ins. in diam.bears N85°E.20 lks. dist., marked T35N.,R12W.,S32 BT.
 A cedar 12 ins. in diam. bears S23°E.143 lks. dist., marked T34N.,R12W.,S5 BT.
 A cedar 14 ins. in diam. bears S71°W.99 lks.dist., marked T34N.,R12W.,S6 BT.
 A cedar 12 ins. in diam. bears N50°W.63 lks. dist., marked T35N.,R12W.,S31 BT.

North boundary of T.34 N., R.12 W.

Chains.

Land, rolling.
Soil, sandy and stony 3 rd. and 4 th. rate.
Timber, cedar and pinion.
Undergrowth, sagebrush and cactae.

- East bet. secs. 5 and 32.
- Descend SE. slope over rolling sandy land through cedar and pinion timber. .0
- 13.00 Draw 20 lks. wide course NE.
- Ascend over NW. slope.
- 15.00 Top of low spur slopes NE.
- Descend over SE. slope.
- 39.00 Bottom of draw 20 lks. wide course NE.
- Ascend over NW. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 18 ins. in the ground to bedrock, supported in a mound of stone for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S 32

S 5

1926

from which,

- A cedar 6 ins. in diam. bears N70°E. 55 lks. dist., marked $\frac{1}{4}$ S32 BT.
- A cedar 10 ins. in diam. bears S78°E. 88 lks. dist., marked $\frac{1}{4}$ S5 BT.
- 45.00 Top of spur slopes NW.
- Descend over NE. slope.
- 53.50 Ravine 20 lks. wide 1 ft. deep, course NE.
- Ascend over NW. slope 29 ft.
- 75.00 Top of ridge bears NE. and SW.
- Descend 29 ft. over SE. slope
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 6 ins. in the ground to bedrock, supported in a mound of stone for cor. of secs. 4, 5, 32, and 33. marked on brass cap

T35N | R12W

S 32 | S 33

S 5 | S 4

T34N

1926

from which,

- A cedar 6 ins. in diam. bears N79°E. 130 lks. dist., marked T35N., R12W., S33 BT.
- A cedar 8 ins. in diam. bears S45°E. 20 lks. dist., marked T34N., R12W., S4 BT.
- A cedar 6 ins. in diam. bears S68°W. 84 lks. dist., marked T34N., R12W., S5 BT.
- A cedar 12 ins. in diam. bears N41°W. 88 lks. dist., marked T35N., R12W., S32 BT.

Land, rolling mountainous.
Soil, sandy and stony 3 rd. and 4 th. rate.
Timber, cedar and pinion.
Undergrowth, sagebrush.

North boundary of T.34 N., R.12 W.

Chains

East bet. secs. 4 and 33.
 Descend SE. slope over rolling stony mountainous land through cedar and pinion timber.
 5.00 Ravine course NE.
 Ascend over NW. slope.
 10.00 Top of spur slopes NE.
 Descend 29 ft. over SE. slope.
 34.00 Wash 50 lks. wide 2 ft. deep, course NE.
 Ascend over NW. slope.
 39.00 Top of spur slopes N.
 Descend 34 ft. over E. slope.
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 20 ins. in the ground to bedrock, supported in a mound of stone for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S.33
 S 4
 1926

from which,

A cedar 8 ins. in diam. bears N72°W. 75 lks. dist., marked $\frac{1}{4}$ S33 BT.
 A cedar 6 ins. in diam. bears S74°W. 109 lks. dist., marked $\frac{1}{4}$ S4 BT.

50.50 Wash 20 lks. wide course NE.
 Ascend 46 ft. over NW. slope.
 60.00 Top of spur slopes NE.
 Descend 58 ft. over SE. slope.
 76.90 Wash 20 lks. wide 2 ft. deep, course NE.
 Ascend over NW. slope
 78.50 Top of low spur slopes NE.
 Descend over SE. slope.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 24 ins. in the ground for cor. of secs. 3, 4, 33, and 34. marked on brass cap

T35N | R12W
 S 33 | S 34
 S 4 | S 3
 T34N
 1926

from which,

A cedar 6 ins. in diam. bears N66 $\frac{1}{2}$ °E. 150 lks. dist., marked T35N., R12W., S34 BT.
 A cedar 8 ins. in diam. bears S74°E. 281 lks. dist., marked T34N., R12W., S3 BT.
 A cedar 4 ins. in diam. bears S44 $\frac{1}{2}$ °W. 78 lks. dist., marked T34N., R12W., S4 BT.
 A cedar 10 ins. in diam. bears N18°W. 301 lks. dist., marked T35N., R12W., S33 BT

Land, rolling mountainous.
 Soil, sandy and stony 3. rd. and 4 th. rate.
 Timber, cedar and pinion.
 Undergrowth, sagebrush.

East bet. secs. 3 and 34.
 Descend NE. slope over rolling mountainous land, through cedar and pinion timber, 29 ft.

22.00 Road to St. George Utah, bears NW. and E.
 25.00 Leave road bears W. and SE.
 29.50 Wash 20 lks. wide 2 ft. deep, course SE.
 Ascend over SW. slope.

North boundary of T.34 N., R.12 W.

Chains.

30.00 Top of spur slopes S.
 Descend over E. slope.
 31.50 Wash 50 lks. wide 2 ft. deep, course SW.
 Ascend 81 ft. over NW. slope.
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 10 ins. in the
 ground to bedrock, supported in a mound of stone
 for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S. 34
 S 3
 1926

from which,

A cedar 6 ins. in diam. bears N3°W. 53 lks. dist.,
 marked $\frac{1}{4}$ S34 BT.
 A cedar 10 ins. in diam. bears S20°E. 206 lks. dist.,
 marked $\frac{1}{4}$ S3 BT.

43.00 Top of spur, slopes S.
 Descend 34 ft. over E. slope.
 59.50 Wash 20 lks. wide 1 ft. deep, course SE.
 Ascend over SW. slope.
 78.00 Top of spur slopes SE.
 Descend 29 ft. over NE. slope
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 24 ins. in
 the ground for cor. of secs. 2, 3, 34, and 35. marked
 on brass cap

T35N | R12W
 S 34 | S 35
 S 3 | S 2
 T.34 N.
 1926

from which,

A cedar 20 ins. in diam. bears N82°E. 234 lks. dist.,
 marked T35N., R12W., S35 BT.
 A cedar 6 ins. in diam. bears S9°E. 62 lks. dist.,
 marked T34N., R12W., S2 BT.
 A cedar 12 ins. in diam. bears S80 $\frac{1}{2}$ °W. 125 lks. dist.,
 marked T34N., R12W., S3 BT.
 A cedar 8 ins. in diam. bears N32 $\frac{1}{2}$ °W. 84 lks. dist.,
 marked T35N., R12W., S34 BT.

Land, rolling mountainous.
 Soil, sandy and stony 3 rd. and 4 th. rate.
 Timber, cedar and pinion.
 Undergrowth, sagebrush.

East bet. secs. 2 and 35.
 Descend NE. slope over rolling stony mountainous land
 through cedar and pinion timber.
 .20 Draw course S.
 Ascend over W. slope.
 9.20 Top of spur slopes S.
 Descend 29 ft. over E. slope.
 15.50 Wash 20 lks. wide 10 ft. deep, course SW.
 Ascend over NW. slope.
 20.00 Top of spur slopes SE.
 Descend 61 ft. over NE. slope
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 22 ins. in the
 ground to bedrock, supported in a mound of stone
 for $\frac{1}{4}$ sec. cor. marked on brass cap

North boundary of T.34 N., R.12 W.

Chains

$$\frac{1}{4} \frac{S \ 35}{S \ 2}$$
 1926

from which,

- A cedar 8 ins. in diam. bears N15°E. 5 lks. dist.,
marked $\frac{1}{4}$ S35 BT.
- A cedar 6 ins. in diam. bears S36°W. 57 lks. dist.,
marked $\frac{1}{4}$ S2 BT.
- 57.43 Wash 50 lks. wide 2 ft. deep course SW.
Ascend 279 ft. over NW slope.
- 75.50 Head of wash 20 lks. wide course SW.; continue ascent to
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 26 ins. in
the ground for cor. of secs. 1, 2, 35, and 36.
marked on brass cap

T35N	R12W
S 35	S 36
S 2	S 1
T34N	
1926	

from which;

- A pinion 10 ins. in diam. bears N34°E. 44 lks. dist.,
marked T35N., R12W., S36 BT.
- A cedar 12 ins. in diam. bears S28°E. 128 lks. dist.,
marked T34N., R12W., S1 BT.
- A pinion 10 ins. in diam. bears S67°W. 30 lks. dist.,
marked T34N., R12W., S2 BT.
- A pinion 8 ins. in diam. bears N73°W. 24 lks. dist.,
marked T35N., R12W., S35 BT.

Land, rolling mountainous.
Soil, sandy and stony 3 rd. and 4 th. rate.
Timber, cedar and pinion.
Undergrowth, oak, cactae, and sagebrush.

- East bet. secs. 1 and 36.
Ascend 169 ft. over NW slope over stony mountainous land
through cedar and pinion timber.
- 15.00 Top of ridge bears NW. and SE.
- 16.00 Top of bluff 15 ft. high, bears NW. and SE.
Descend 257 ft. over NE slope.
- 25.00 Foot of abrupt descent; descend gradually.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 14 ins. in the
ground to bedrock, supported in a mound of stone
for $\frac{1}{4}$ sec. cor. marked on brass cap

$$\frac{1}{4} \frac{S \ 36}{S \ 1}$$
 1926

from which,

- A cedar 8 ins. in diam. bears N75°E. 34 lks. dist.,
marked $\frac{1}{4}$ S36 BT.
- A pinion 6 ins. in dia., bears S29°W. 20 lks. dist.,
marked $\frac{1}{4}$ S1 BT.
- 47.84 Wash 50 lks. wide 2 ft. deep, course NW.
Ascend 84 ft. over SW slope.
- 57.00 Top of spur slopes S.

North boundary of T.34 N., R.12 W.

Chains

- 58.22 Descend E. slope.
Wash 20 lks. wide 1 ft. deep, course S.
- 63.50 Ascend 69 ft. over W. slope.
Top of spur slopes SW.
- 67.80 Descend 23 ft. over SE. slope.
Wash 20 lks. wide 2 ft. deep, course S.
- 80.00 Ascend 92 ft. over W. slope to
Intersect the cor. of Ts. 34 and 35 N., Rs. 11 and 12 W.
hereinbefore described.

Land, rolling mountainous.
Soil, stony 3 rd. and 4 th. rate.
Timber, cedar and pinion.
Undergrowth, oak, cactae, and sagebrush.

11111111

Subdivision of T.34 N., R.12 W.

Chains

The cor. of secs. 1, 2, 35, and 36 on S. bdy. of Tp. established by William H. Thorn, U.S. Surveyor, in 1917 under Group No. 73 Arizona, which is an iron post 3 ins. in diam. projecting 12 ins. above ground, firmly set with brass cap marked

T34N	R12W
S 35	S 36
S 2	S 1

T33N
1917

from which,

- A pinion 12 ins. in diam. bears N74°E.99 lks. dist., marked T34N., R12W., S36 BT.
- A cedar 12 ins. in diam. bears S20°E.90 lks. dist., marked T33N., R12W., S1 BT.
- A cedar 20 ins. in diam. bears S59°W.147 lks. dist., marked T33N., R12W., S2 BT.
- A cedar 10 ins. in diam. bears N76°W.62 lks. dist., marked T34N., R12W., S35 BT.

Thence

N 0°08'W. bet. secs. 35 and 36.

Over rolling sandy land through cedar and pinion timber and undergrowth.

- 2.50 Wash 10 lks. wide 2 ft. deep course E.
Ascend over S. slope.
- 15.00 Top of low spur slopes E.
Descend over N. slope.
- 33.70 Wash 20 lks. wide 2 ft. deep course SE.
Ascend over S. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

S 35	S 36
------	------

1926

from which,

- A pinion 14 ins. in diam. bears S14°E.72 lks. dist., marked $\frac{1}{4}$ S36 BT.
- A pinion 16 ins. in diam. bears S69°W.63 lks. dist., marked $\frac{1}{4}$ S35 BT.

- 47.00 Top of low spur slopes E.
Descend over N. slope.
- 51.00 Wash 20 lks. wide 3 ft. deep course NE.
Ascend over gradual SE. slope.
- 70.00 Top of low spur slopes SE.
Descend over NE. slope.
- 76.00 Ravine course SE.
Ascend over SW? slope. 24 ft. to
- 80.00 Top of spur slopes SE.; Set an iron post 3 ft. long 2 ins. in diam. 20 ins. in the ground to bedrock, supported in a mound of stone for cor. of secs. 25, 26, 35, and 36., marked on brass cap

T34N	R12W
S 26	S 25
S 35	S 36

1926

from which,

- A cedar 8 ins. in diam. bears N37°E.35 lks. dist., marked T34N., R12W., S25 BT.

Subdivision of T.34 N., R.12 W.

Chains

A cedar 8 ins. in diam. bears S40°E.37 lks. dist.,
 marked T34N.,R12W.,S36 BT.
 A pinion 14 ins. in diam. bears S26°W.30 lks. dist.,
 marked T34N.,R12W.,S35 BT.
 A cedar 8 ins. in diam. bears N30°W.65 lks. dist.,
 marked T34N.,R12W.,S26 BT.

Land,rolling.
 Soil,sandy 3 rd. and 4 th. rate.
 Timber,cedar and pinion.
 Undergrowth,cactae and sagebrush.

40.00 N 89°59'E. on a random line bet. secs.25 and 36.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.06 Intersect E.bdy.of Tp.2 lks. S.of the cor. of secs.25,30,
 31,and 36.hereinbefore described.
 Thence
 S 89°58'W.on true line bet. secs.25 and 36.
 Over level sandy land on top of ridge,through cedar and
 pinion timber.
 3.00 Leave level land bears N. and S.;Enter rolling land.
 Descend over W.slope of ridge.
 9.06 Bottom of draw course SW.
 Ascend over SE. slope
 .13.06 Top of spur slopes SW.
 Descend over W.slope.
 36.50 Road to St.George Utah bears NW. and SE.
 36.56 Wash 10 lks. wide course SE.
 Enter flat
 40.03 Set an iron post 3 ft. long, 1 in. in diam.22 ins. in
 the ground to bedrock,supported in a mound of
 stone for $\frac{1}{4}$ sec. cor.,mkd.on brass cap,

$\frac{1}{4}$ S 25
 S 36
 1926

from which,

A cedar 14 ins. in diam. bears N47°W.434 lks. dist.,
 marked $\frac{1}{4}$ S25 BT.
 A cedar 6 ins. in diam. bears S44 $\frac{1}{2}$ °W.1277 lks. dist.,
 marked $\frac{1}{4}$ S36 BT.
 50.06 Top of low spur slopes S.
 Descend over W. slope
 57.56 Wash 20 lks. wide 2 ft. deep course SE.;Leave timber
 bears NW. and SE. Leave flat
 Ascend 80 ft. over NE. slope.
 58.06 Enter timber bears N. and S.
 80.06 The cor. of secs.25,26,35,and 36.

Land, level and rolling.
 Soil,sandy and stony 3 rd. and 4 th. rate.
 Timber,cedar and pinion.
 Undergrowth,sage and buckbrush.

16.00 N 0°08'W. bet. secs. 25 and 26.
 Descend 29 ft. over NE. slope over rolling sandy land,
 through cedar and pinion timber and undergrowth.
 Ravine course SE.
 Ascend over SW.slope.
 25.00 Top of low ridge bears NE. and SW.

Subdivision of T.34 N., R.12 W.

Chains

- 39.50 Descend over NW. slope.
Wash 50 lks. wide 4 ft. deep course NE.
Ascend over SE. slope.
- 40.00 Set an iron post 3 ft. long; 1 in. in diam. 18 ins. in the
ground to bedrock; supported in a mound of stone
for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$
 S 26 | S 25

1926

from which,

- A cedar 12 ins. in diam. bears N23°E. 398 lks. dist.,
marked $\frac{1}{4}$ S25 BT.
- A cedar 8 ins. in diam. bears N24°W. 277 lks. dist.,
marked $\frac{1}{4}$ S26 BT.
- 50.00 Top of spur slopes E.
Descend over N. slope.
- 54.70 Wash 15 lks. wide 2 ft. deep course NE.
Ascend over SE. slope.
- 63.00 Top of spur slopes NE.
Descend over NW. slope.
- 67.00 Bottom of draw course NE.
Ascend over SE. slope.
- 75.00 Top of spur slopes NE.
Descend over NW. slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 24 ins. in
the ground for cor. of secs. 23, 24, 25, and 26.
marked on brass cap

T34N | R12W
 S 23 | S 24
 S 26 | S 25

1926.

from which,

- A cedar 18 ins. in diam. bears N40°E. 519 lks. dist.,
marked T34N., R12W., S24 BT.
- A cedar 20 ins. in diam. bears S83°E. 74 lks. dist.,
marked T34N., R12W., S25 BT.
- A cedar 12 ins. in diam. bears S8°W. 248 lks. dist.,
marked T34N., R12W., S26 BT.
- A cedar 24 ins. in diam. bears N40°W. 230 lks. dist.,
marked T34N., R12W., S23 BT.

Land, rolling.

Soil sandy and stony 3 rd. and 4 th. rate.

Timber. cedar and pinion.

Undergrowth., sagebrush.

- 40.00 N 89°58'E. on a random line bet. secs. 24 and 25.
Set temp. $\frac{1}{4}$ sec. cor.
- 80.14 Intersect E. bdy. of Tp. 3 lks. S. of the cor. of secs. 19,
24, 25, and 30. hereinbefore described.
- Thence
S 89°57'W. on true line bet. secs. 24 and 25.
Descend along NW. slope over rolling stony mountainous
land, through cedar and pinion timber

Subdivision of T.34 N.,R.12 W.

- Chains
- 12.14 Bottom of draw course SE.
Ascend over NE. slope.
- 16.14 Top of spur slopes SW.
Descend 29 ft. over NW. slope.
- 19.14 Wash 50 lks. wide 2 ft. deep course NW.
Ascend over NE. slope.
- 24.14 Top of spur slopes NE.
Descend over NW. slope.
- 26.14 Shallow ravine course NE.
Ascend over SE. slope.
- 30.14 Top of low spur slopes NE.
Descend over NW. slope.
- 33.14 Bottom of draw course NE.
Ascend over SE. slope.
- 35.14 Top of spur slopes NE.
Descend over NW. slope.
- 40.07 Set an iron post 3 ft. long; 1 in. in diam. 26 ins. in the
ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 24
 S 25
 1926

from which,

- A cedar 6 ins. in diam. bears N12°E. 328 lks. dist.,
marked $\frac{1}{4}$ S24 BT.
- A cedar 10 ins. in diam. bears S12°E. 338 lks. dist.,
marked $\frac{1}{4}$ S25 BT.
- 53.14 Wash 30 lks. wide 4 ft. deep course NE.
Ascend over SE. slope.
- 59.64 Road to Hurricane Valley bears N. and S.
- 68.54 A branch of the Hurricane Valley road bears NW. and SE.
- 70.14 Draw course NE.
Ascend over SE. slope.
- 79.14 Top of low spur slopes NE.
Descend over NW. slope.
- 80.14 The cor. of secs. 23, 24, 25, and 26.

Land, rolling.
Soil, sandy 3 rd. and 4 th. rate.
Timber, cedar and pinion.
Undergrowth, sagebrush.

- N 0°08'W. bet. secs. 23 and 24.
Descend slightly over NE. slope over rolling sandy land
through cedar and pinion timber.
- .50 Wash 20 lks. wide 3 ft. deep course NE.
- 5.50 Road from Hurricane Valley bears NW. and SE.
Ascend gradually over S. slope.
- 10.00 Top of ridge bears NW. and SE.
Descend over NE. slope.
- 25.00 Road from Hurricane Valley bears NW. and SE.
- 30.00 Wash 50 lks. wide course NE.
Ascend over SE. slope.
- 34.50 Road from Hurricane Valley bears NW. and SE.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 24 ins. in
the ground for $\frac{1}{4}$ sec. cor., marked on brass cap.

$\frac{1}{4}$
 S 23 | S 24
 1926

from which

Subdivision of T.34 N., R.12 W.

Chains

A cedar 8 ins. in diam. bears N8°E.120 lks. dist.,
marked $\frac{1}{4}$ S24 BT.
A cedar 24 ins. in diam. bears N48°W.97 lks. dist.,
marked $\frac{1}{4}$ S23 BT.
42.00 Top of spur slopes SE.
Descend over NE. slope.
45.00 Wash 50 lks. wide course SE.
Ascend over SW. slope.
52.00 Top of spur slopes SE.
Descend over NE. slope.
60.65 Wash 50 lks. wide 2 ft. deep course SE.
Ascend over SW. slope.
65.00 Top of spur slopes SW.
Descend over NW. slope.
66.50 Ravine 20 lks. wide 2 ft. deep course SW.
Ascend over SE. slope.
80.00 Set an iron post 3 ft. long, 2 ins. in diam. 24 ins. in
the ground for cor. of secs.13,14,23, and 24. marked
on brass cap

T34N	R12W
S 14	S 13
S 23	S 24

1926

from which,

A cedar 8 ins. in diam. bears N28°E.143 lks. dist.,
marked T34N.,R12W.,S13 BT.
A cedar 12 ins. in diam. bears S60°E.334 lks. dist.,
marked T34N.,R12W.,S24 BT.
A cedar 8 ins. in diam. bears S69°W.760 lks. dist.,
marked T34N.,R12W.,S23 BT.
A cedar 12 ins. in diam. bears N23°W.229 lks. dist.,
marked T34N.,R12W.,S14 BT.

Land, rolling.
Soil, sandy 4 th. rate.
Timber, cedar and pinion.
Undergrowth, sagebrush.

40.00 N 89°57'E. on a random line bet. secs.13 and 24.
Set temp. $\frac{1}{4}$ sec. cor.
80.14 Intersect E. bdy. of Tp.5 lks. N. of the cor. of secs.13,18,
19, and 24. hereinbefore described.
Thence
S 89°59'W. on true line bet. secs. 13 and 24.
Ascend SE. slope over rolling sandy land, through cedar and
pinion timber.
1.14 Top of spur slopes NE.
Descend over NW. slope.
19.84 Wash 50 lks. wide 2 ft. deep, course NE.
Ascend 23 ft. over NE. slope.
25.14 Top of spur slopes SE.
Descend over SW. slope.
35.14 Wash 50 lks. wide 2 ft. deep course SE.
Ascend over NE. slope.
40.07 Set an iron post 3 ft. long, 1 in. in diam. 12 ins. in the
ground to bedrock, supported in a mould of stone
for $\frac{1}{4}$ sec cor. marked on brass cap

$\frac{1}{4}$ S 13
S 24

1926

from which


Subdivision of T.34 N., R.12 W.

Chains

- A cedar 8 ins. in diam. bears N23°W.73 lks. dist., marked $\frac{1}{4}$ S13 BT.
- A cedar 10 ins. in diam. bears S37°W.115 lks. dist., marked $\frac{1}{4}$ S24 BT.
- 55.14 Top of spur slopes SE.
Descend over SW. slope.
- 62.14 Bottom of draw 20 lks. wide course SE.
Ascend over NE. slope.
- 63.64 Top of spur slopes NE.
Descend over NW. slope.
- 65.14 Bottom of draw 50 lks. wide course NE.
Ascend over SE. slope.
- 71.64 Top of spur slopes SE.
Descend over SW. slope.
- 80.14 The cor. of secs. 13,14,23, and 24.

Land, rolling.
Soil, sandy 4 th. rate.
Timber, cedar and pinion.
Undergrowth, sagebrush and cactae.

- N 0°08'W. bet. secs. 13 and 14.
Ascend SW. slope over rolling sandy land through cedar and pinion timber.
- 10.00 Top of ridge bears NW. and SE.
Descend over NE. slope.
- 20.00 Wash 15 lks. wide 1 ft. deep course NE.
Ascend over SE. slope.
- 30.00 Top of ridge bears NW. and NE.
Descend over NE. slope.
- 35.00 Wash 10 lks. wide 2 ft. deep course NE.
Ascend over SE. slope.
- 39.00 Top of small spur slopes E.
Descend over N. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 24 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



from which,

- A cedar 20 ins. in diam. bears S2°E.53 lks. dist., marked $\frac{1}{4}$ S13 BT.
- A pinion 14 ins. in diam. bears N75°W.70 lks. dist., marked $\frac{1}{4}$ S14 BT.
- 44.50 Wash 20 lks. wide 2 ft. deep course SE.
Ascend 47 ft. over SW. slope.
- 57.00 Top of spur slopes E.
Descend over N. slope.
- 62.00 Wash 20 lks. wide 2 ft. deep course NE.
Ascend over SE. slope
- 67.00 Top of spur slopes NE.
Descend 29 ft. over NW. slope
- 73.00 Wash 20 lks. wide 2 ft. deep course NE.
Ascend over SE. slope
- 79.00 Top of ridge bears NE. and SW.
Descend slightly
- 80.00 Set an iron post 3 ft. long 2 ins. in diam. 12 ins. in the ground to bedrock, supported in a mound of stone for cor. of secs. 11,12,13, and 14. marked on brass cap

Subdivision of T.34 N., R.12 W.

Chains

T34N	R12W
S 11	S 12
S 14	S 13

1926

from which,

- A cedar 14 ins. in diam. bears N37°E.136 lks. dist. marked T34N.,R12W.,S12 BT.
- A cedar 4 ins. in diam. bears S20°E.142 lks. dist., marked BT. only.
- A cedar 24 ins. in diam. bears S76°W.250 lks. dist., marked T34N.,R12W.,S14 BT.
- A cedar 4 ins. in diam. bears N25°W.246 lks. dist., marked T34N.,R12W.,S11 BT.

Land, rolling.
Soil, sandy 4 th. rate.
Timber, cedar and pinion.
Undergrowth, cactae and sagebrush.

- 40.00 N 89°59'E. on a random line bet. secs.12 and 13. Set temp. 1/4 sec. cor.
- 80.12 Intersect E. bdy. of T.12 lks. N. of the cor. of secs. 7, 12, 13, and 18, hereinbefore described.
- Thence N 89°56'W. on true line bet. secs. 12 and 13.
- Ascend 29 ft. over NE. slope over rolling sandy land, through cedar and pinion timber.
- 11.12 Top of spur slopes NW.
- Descend 57 ft. over SW. slope.
- 27.12 Wash 20 lks. wide 2 ft. deep course NW.
- Ascend 72 ft. over NE. slope.
- 28.62 Top of spur slopes NW.
- Descend over SW. slope.
- 29.12 Wash 20 lks. wide 1 ft. deep, course NE.
- Ascend 72 ft. over SE. slope.
- 38.12 Top of spur slopes NE.
- Descend 25 ft. over NW. slope.
- 40.06 Set an iron post 3 ft. long 1 in. in diam. 12 ins. in the ground to bedrock, supported in a mound of stone for 1/4 sec. cor., marked on brass cap

1/4 S 12
S 13

1926

from which,


- A cedar 12 ins. in diam. bears N29°E.70 lks. dist., marked 1/4 S12 BT.
- A cedar 14 ins. in diam. bears S83°E.46 lks. dist., marked 1/4 S13 BT.
- 42.28 Wash 50 lks. wide 2 ft. deep course NE.
- Ascend 68 ft. over SE. slope.
- 55.12 Top of spur slopes NE.
- Descend over NW. slope.
- 59.12 Bottom of draw 20 lks. wide course NE.
- Ascend over SE. slope.
- 63.12 Top of low spur slopes NE.
- Descend over NW. slope.
- 66.12 Wash 50 lks. wide 2 ft. deep course NE.
- Ascend 66 ft. over SE. slope

Subdivision of T.34 N., R.12 W.

Chains


- 80.12 The cor. of secs. 11, 12, 13, and 14.
Land, rolling and mountainous.
Soil, sandy and stony 3 rd. and 4 th. rate.
Timber, cedar and pinion.
Undergrowth, sage and buckbrush.

- N 0°08'W. bet. secs. 11 and 12.
Descend 67 ft. over NW. slope over rolling mountainous land through cedar and pinion timber.
- 10.35 Wash 20 lks. wide course NW.
Ascend slightly over SW. slope.
- 11.00 Top of spur slopes NW.
Descend 39 ft. over NE. slope.
- 16.60 Wash 15 lks. wide 1 ft. deep course NE.
Ascend 17 ft. over SE. slope.
- 22.50 Top of spur slopes E.
Descend 50 ft. over N. slope
- 26.80 Same wash 20 lks. wide 2 ft. deep course NW.
Ascend SW. slope.
- 28.50 Top of spur slopes W.
Descend 74 ft. over NW. slope.
- 34.00 Same wash 15 lks. wide course NE.
Ascend 6 ft. over SE. slope.
- 36.00 Top of spur slopes E.
Descend over N. slope. 64 ft.
- 37.35 Same ravine 20 lks. wide course NW.
Ascend 58 ft. over SW. slope.
- 39.50 Top of steep ascent; ascend gradually.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



from which,

- A cedar 10 ins. in diam. bears S44°E. 223 lks. dist., marked $\frac{1}{4}$ S12 BT.
- A cedar 20 ins. in diam. bears N51°W. 448 lks. dist., marked $\frac{1}{4}$ S11 BT.
- 45.00 Top of spur slopes N.
Descend 34 ft. along top of spur.
- 50.00 Leave top of spur bears NE.
Descend 207 ft. over NW. slope into the Parashont Wash.
- 58.50 Bottom of the Parashont Wash 50 lks. wide course E.
Ascend 57 ft. over broken S. slope.
- 65.00 Top of spur, slopes SE.
Descend 45 ft. over NE. slope.
- 71.00 Wash 20 lks. wide course SE., thence in bottom of same
- 73.00 Leave wash, course SE. from NE.
Ascend 65 ft. over SE. slope to
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. with stone marked with a cross (x) at base 10 ins. in the ground to bedrock, supported in a mound of stone for cor. of secs. 1, 2, 11, and 12. marked on brass cap



1926

from which

Subdivision of T.34 N., R.12 W.

Chains

A cedar 12 ins. in diam, bears $N43^{\circ}W$. 380 lks. dist.,
marked T34N., R12W., S2 BT.
No other bearing trees available.

Land, mountainous.
Soil, stony 4 th. rate.
Timber, cedar and pinion.
Undergrowth, sagebrush.

40.00 S $89^{\circ}56'E$. on a random line bet. secs. 1 and 12
Set temp. $\frac{1}{4}$ sec. cor.
80.20 Intersect E. bdy. of Tp. at the cor. of secs. 1, 6, 7, and 12.
hereinbefore described.
Thence
N $89^{\circ}56'W$. on true line bet. secs. 1 and 12.
Descend SW. slope over stony mountainous land through
cedar and pinion timber.
7.70 Road bears NE. and SW.
14.00 Wash course SW.
Ascend over SE. slope 52 ft.
17.59 Top of spur slopes S.
Descend 101 ft. over W. slope.
36.10 Same road bears NW. and SE.
37.10 Wash 20 lks. wide course SE.
Ascend 20 ft. over NE. slope.
40.10 Set an iron post 3 ft. long. 1 in. in diam. 16 ins. in the
ground to bedrock, supported in a mound of stone
for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S 1
S 12

1926

from which,


A pinion 10 ins. in diam. bears $N6^{\circ}W$. 168 lks. dist.,
marked $\frac{1}{4}$ S1 BT.
A cedar 12 ins. in diam. bears $S68^{\circ}E$. 89 lks. dist.,
marked $\frac{1}{4}$ S12 BT.
48.70 Top of spur slopes SE.
Descend 31 ft. over SW. slope.
52.00 Wash 20 lks. wide course SE.
Ascend 31 ft. over NE. slope.
61.89 Top of spur slopes S.
Descend 29 ft. over W. slope.
67.10 Wash course SE.
Ascend 62 ft. over NE. slope.
71.70 Top of spur slopes SW.
Descend 34 ft. over NW. slope.
77.20 Wash 20 lks. wide course SW.
Ascend 28 ft. over SE. slope to
80.20 The cor. of secs. 1, 2, 11 and 12.

Land, mountainous.
Soil, stony 4 th. rate.
Timber, cedar and pinion.
Undergrowth, sagebrush and cactae.

40.00 N $0^{\circ}08'W$. on a random line bet. secs. 1 and 2.
Set temp. $\frac{1}{4}$ sec. cor.
78.85 Intersect N. bdy. of Tp. 5 lks. W. of the cor. of secs.

Subdivision of T.34 N., R.12 W.

- Chains 1, 2, 35, and 36 hereinbefore described.
- Thence S 0°06' E. on true line bet. secs. 1. and 2.
- Ascend NW. slope over rolling mountainous land, through cedar and pinion timber.
- 4.15 Top of spur slopes SW.
 - Descend 86 ft. over SE. slope.
 - 12.55 Wash 10 lks. wide course SW.
 - Ascend 8 ft. over NW. slope.
 - 14.05 Top of spur, slopes SW.
 - Descend 166 ft. over SE. slope.
 - 35.25 Wash 10 lks. wide 5 ft. deep course SW.
 - Ascend 31 ft. over NW. slope
 - 38.85 Set an iron post 3 ft. long, 1 in. in diam. 16 ins. in the ground to bedrock, supported in a mound of stone for $\frac{1}{4}$ sec. cor. marked on brass cap




from which,

- A cedar 6 ins. in diam. bears N69°E. 57 lks. dist., marked $\frac{1}{4}$ S1 BT.
- A cedar 6 ins. in diam. bears N73 $\frac{1}{2}$ °W. 155 lks. dist., marked $\frac{1}{4}$ S2 BT.
- 46.85 Road to Parashont Valley bears NW. and SE.
- 52.85 Top of spur slopes SW.
- Descend 59 ft. over SE. slope.
- 69.05 Wash course SW.
- Ascend over NW. slope.
- 70.85 Point of spur slopes SW.
- Descend over SE. slope.
- 73.85 Same wash course SE.
- Ascend over NE. slope.
- 75.85 Top of spur slopes SE.
- Descend over SW. slope. 14 ft. to
- 78.85 The cor. of secs. 1, 2, 11, and 12.

Land, mountainous.
 Soil, stony 4th rate.
 Timber, cedar and pinion.
 Undergrowth, sagebrush and caetae.

From the cor. of secs. 2, 3, 34, and 35 on S. bdy. of Tp., established by William H. Thorn, U.S. Surveyor, in 1917 under Group No. 73 Arizona, which is an iron post 2 ins. in diam. 28 ins. above ground, firmly set in a mound of stone with brass cap marked



from which,

- A cedar 20 ins. in diam. bears N70°E. 78 lks. dist., marked T34N., R12W., S35 BT.
- A cedar 14 ins. in diam. bears S62°E. 125 lks. dist., marked T33N., R12W., S2 BT.

Subdivision of T.34 N., R.12 W.

Chains

A cedar 30 ins. in diam. bears S76°W.87 lks. dist.,
marked T33N.,R12W.,S3 BT.
A cedar 30 ins. in diam. bears N62°W.125 lks. dist.,
marked T34N.,R12W.,S34 BT.

Thence

N 0°00'W. on true line bet. secs. 34 and 35.

Ascend over SW. slope over mountainous land, through cedar
and pinion timber

20.00 Top of spur slopes SE.

Descend over NE. slope.

24.00 Wash 10 lks. wide course SE.

Ascend 23 ft. over SW. slope.

40.00 Top of low ridge bears E. and W.; Set an iron post 3 ft.
long, 1 in. in diam. 12 ins. in the ground to
bedrock, supported in a mound of stone for $\frac{1}{4}$ sec.
cor. marked on brass cap.

S 34 | S 35

1926

from which,

A pinion 8 ins. in diam. bears S47°E.61 lks. dist.,
marked $\frac{1}{4}$ S35 BT.

A cedar 20 ins. in diam. bears S78°W.16 lks. dist.,
marked $\frac{1}{4}$ S34 BT.

61.00 Top of low ridge bears NE. and SW.

Descend over NW. slope.

66.00 Wash 20 lks. wide course SW.

Ascend 23 ft. over SE. slope.

70.00 Top of low spur slopes NE.

Descend 58 ft. over NW. slope.

80.00 Set an iron post 3 ft. long, 2 ins. in diam, 12 ins. in
the ground to bedrock, supported in a mound of
stone for cor. of secs. 26, 27, 34, and 35, marked on
brass cap

T34N | R12W
S 27 | S 26

S 34 | S 35

1926

from which,

A cedar 20 ins. in diam. bears N25°E.178 lks. dist.,
marked T34N.,R12W.,S26 BT.

A cedar 14 ins. in diam. bears S23°E.96 lks. dist.,
marked T34N.,R12W.,S35 BT.

A cedar 40 ins. in diam. bears S53°W.102 lks. dist.,
marked T34N.,R12W.,S34 BT.

A cedar 6 ins. in diam. bears N49°W.24 lks. dist.,
marked T34N.,R12W.,S27 BT.

Land, rolling mountainous.

Soil, stony 4 th. rate.

Timber, cedar and pinion.

Undergrowth, sagebrush.

N 89°59'E. on a random line bet. secs. 26 and 35

Subdivision of T.34 N., R.12 W.

Chains

40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.96 Intersect N. and S. line 12 lks. N. of the cor. of secs. 25, 26, 35, and 36.
 Thence
 N 89°56' W. on true line bet. secs. 26 and 35.
 Ascend 159 ft. over E. slope over stony mountainous land through cedar and pinion timber.
 14.96 Top of ridge bears NE. and SW.
 Descend 23 ft. over SW. slope.
 25.96 Head of wash 20 lks. wide 1 ft. deep course NW.
 Ascend over NE. slope.
 33.96 Top of spur slopes NW.
 Descend 46 ft. over SW. slope.
 38.99 Wash 50 lks. wide 2 ft. deep course N.
 Ascend 16 ft. over E. slope.
 39.98 Set an iron post 3 ft. long, 1 in. in diam. 1 in. in the ground to bedrock, supported in a mound of stone for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S 26
 S 35
 1926

from which,

A cedar 8 ins. in diam. bears N75°E. 43 lks. dist., marked $\frac{1}{4}$ S26 BT.
 A cedar 10 ins. in diam. bears S62°E. 55 lks. dist., marked $\frac{1}{4}$ S35 BT.

Note; This cor. falls on top of spur, slopes N.

49.36 Descend 102 ft. over S. slope.
 Wash 50 lks. wide 2 ft. deep course N.
 Ascend 160 ft. over E. slope.
 58.96 Top of spur slopes N.
 Descend 77 ft. over W. slope.
 79.96 The cor. of secs. 26, 27, 34, and 35..

Land, rolling mountainous.
 Soil, stony 4 th. rate.
 Timber, cedar and pinion.
 Undergrowth, cactae, buckbrush and sage.

N 0°08' W. bet. secs. 26 and 27.
 Descend 18 ft. over NW. slope over stony mountainous land through cedar and pinion timber.
 3.99 Wash 50 lks. wide 2 ft. deep course NE.
 Ascend 69 ft. over SE. slope
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 8 ins. in the ground to bedrock, supported in a mound of stone for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 S 27 | S 26
 1926

from which,

A cedar 24 ins. in diam. bears East 77 lks. dist., marked $\frac{1}{4}$ S26 BT.
 A pinion 10 ins. in diam. bears S30°W. 130 lks. dist., marked $\frac{1}{4}$ S27 BT.

Subdivision of T.34 N., R.12 W.

Chains

50.00 Top of ridge bears N. and SW.
Descend 34 ft. along top of ridge.
70.00 Draw course W.
Ascend 34 ft. over S. slope of ridge.
80.00 Set an iron post 3 ft. long, 2 ins. in diam. 4 ins. in
the ground to bedrock, supported in a mound of
stone for cor. of secs. 22, 23, 26, and 27. marked on
brass cap

T34N.	R12W
S 22	S 23
S 27	S 26

1926

from which,

- A cedar 12 ins. in diam. bears N30°E. 65 lks. dist.,
marked T34N., R12W., S23 BT.
- A cedar 6 ins. in diam. bears S82°E. 61 lks. dist.,
marked T34N., R12W., S26 BT.
- A cedar 12 ins. in diam. bears S60°W. 88 lks. dist.,
marked T34N., R12W., S27 BT.
- A cedar 8 ins. in diam. bears N33°W. 73 lks. dist.,
marked T34N., R12W., S22 BT.

Land, mountainous.

Soil, stony 4 th. rate.

Timber, cedar and pinion.

Undergrowth, sage and buck brush and cactae.

40.00 S 89°56'E. on a random line bet. secs. 23 and 26.
Set temp. $\frac{1}{4}$ sec. cor.
80.04 Intersect N. and S. line 10 lks. S. of the cor. of secs.
23, 24, 25, and 26.
Thence
West on true line bet. secs. 23, and 26.
Descend NW. slope over rolling land, through sagebrush
undergrowth.
2.04 Wash 50 lks. wide 3 ft. deep, course NE.
Ascend gradually over SE. slope.
20.04 Enter scattering cedar and pinion timber bears NE. and
SW.
30.04 Top of spur slopes SE.
Descend over SW. slope.
35.74 Draw 20 lks. wide 1 ft. deep, course SE.
Ascend 17 ft. over NE. slope.
40.02 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the
ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S 23	
$\frac{1}{4}$ S 26	

1926

from which,

- A cedar 10 ins. in diam. bears N59°W. 69 lks. dist.,
marked $\frac{1}{4}$ S23 BT.
- A pinion 14 ins. in diam. bears S71°E. 81 lks. dist.,
marked $\frac{1}{4}$ S 26 BT.
- 45.04 Top of spur slopes SE.
Descend over SW. slope.
- 49.04 Draw 20 lks. wide 2 ft. deep, course SE.
Ascend 178 ft. over NE. slope to
- 80.04 The cor. of secs. 22, 23, 26, and 27.

Subdivision of T 34 N., R 12 W.

Chains

Land, rolling.
Soil sandy and stony 3rd. and 4th. rate.
Timber, pinion and cedar.
Undergrowth, sagebrush.

- N 0°08'W., bet. secs. 22 and 23.
Ascend gradually over SW. slope over rolling stony land through cedar and pinion timber.
- 5.00 Top of ridge bears N10°W.
Descend 42 ft. over NE. slope.
- 11.00 Head of ravine course W.
Ascend 58 ft. over S. slope.
- 30.00 Top of ascent on ridge bears N5°E.
Descend 23 ft. over NW. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 12 ins. in the ground to bedrock, supported by a mound of stone 2 ft. base 1½ ft. high for ¼ sec. cor. marked on brass cap

↑
S22 | S23

1926

- from which,
A pinion 10 ins. in diam. bears S55°E. 57 lks. dist., marked ¼ S23 BT.
A cedar 8 ins. in diam., bears S75°W. 47 lks. dist., marked ¼ S22 BT.
- 45.00 Shallow wash, course W.
Ascend 23 ft. over S. slope.
- 52.00 Top of ridge, bears N5°W., thence along NE. slope
- 60.00 Top of ridge, bears N. from SW.; Continue slight descent along top of ridge.
- 66.00 Road bears E. and W.
Descend from road over NE. slope to.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 26 ins. in the ground for cor. of secs. 14, 15, 22, and 23, marked on brass cap.

T34N | R12W
S 15 | S 14

S 22 | S 23

1926

- from which,
A cedar 6 ins. in diam. bears N50°E 89 lks. dist., marked T34N., R12W., S14 BT.
A pinion 14 ins. in diam. bears S74°E. 42 lks. dist., marked T34N., R12W | S23 BT.
A pinion 4 ins. in diam. bears S22°W., 25 lks. dist., marked BT. only.
A pinion 10 ins. in diam. bears N88°W. 97 lks. dist., marked T34N., R12W. S15 BT.

Land rolling.
Soil, sandy and stony 3rd. and 4th. rate.
Timber, cedar and pinion.
Undergrowth, sagebrush.

Subdivision of T 34 N., R 12 W.

Chains East on a random line bet. secs.14 and 23
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.10 Intersect N. and S. line 2 lks. N. of the cor. of secs.
 13,14,23, and 24.
 Thence
 N89°59'W. on true line bet. secs.14 and 23.
 Descend SW. slope over rolling stony land, through cedar
 and pinion timber.
 5.10 Wash 5 lks. wide 1 ft. deep, course SE.
 Ascend over NE. slope.
 10.10 Top of spur, slopes SE.
 Descend over SW. slope.
 27.10 Leave timber bears NW. and SE.
 36.10 Road to Hurricane Valley, bears NW. and SE.
 36.20 Wash 50 lks. wide 2 ft. deep, course SE.
 Ascend over E. slope.
 40.05 Set an iron post 3 ft. long, 1 in. in diam. 12 ins. in
 the ground to bedrock, supported by a mound of
 stone 2 ft. base $1\frac{1}{2}$ ft. high for $\frac{1}{4}$ sec. cor.
 marked on brass cap

$\frac{1}{4}$ S 14
 S 23

1926

from which,

A cedar 14 ins. in diam. bears N88°E. 540 lks. dist.,
 marked $\frac{1}{4}$ S14 BT.
 A cedar 6 ins. in diam. bears S70°E. 226 lks. dist.,
 marked $\frac{1}{4}$ S23 BT.
 50.10 Enter timber bears NE. and SW.
 60.10 Top of spur, slopes SE.
 Descend 23 ft. over SW. slope.
 65.10 Ascend over NE. slope to
 80.10 The cor. of secs.14,15,22, and 23.

Land, rolling.
 Soil, sandy and stony 3 rd. and 4th. rate.
 Timber, cedar and pinion.
 Undergrowth, sagebrush.

N 0°06'W. bet. secs.14 and 15.
 Descend 23 ft. over NE. slope over rolling land, through
 cedar and pinion timber.
 14.00 Leave timber bears E. and W.; Enter clearing.
 19.00 Wash 20 lks. wide 2 ft. deep, course NE.
 Ascend over SE. slope.
 21.00 Enter timber bears NE. and SW.
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 12 ins. in the
 ground to bedrock, supported by a mound of stone
 2 ft. base $1\frac{1}{2}$ ft. high for $\frac{1}{4}$ sec. cor., marked on
 brass cap

$\frac{1}{4}$
 S 15 | S 14

1926

from which,

A cedar 12 ins. in diam. bears S68°E. 80 lks. dist.,

Subdivision of T 34 N., R 12 W.

Chains

marked $\frac{1}{4}$ S14 BT.
 A pinion 20 ins. in diam. bears N2°W.88 lks. dist.,
 marked $\frac{1}{4}$ S15 BT.

41.00 Top of spur slopes SE.
 Descend over NE. slope.

45.00 Head of wash 20 lks. wide 1 ft. deep, course NW.
 Road to Hurricane Valley in bottom of wash, bears NW. and
 SE.

Ascend gradually over SW. slope.

45.50 Leave timber bears NW. and SE.

50.00 Top of spur slopes NW.
 Descend over NE. slope.

65.20 Wash 20 lks. wide 2 ft. deep, course NE.
 Ascend over SW. slope.

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 26 ins. in
 the ground for cor. of secs. 10, 11, 14, and 15., marked
 on brass cap

T34N | R12W

S 10 | S 11

S 15 | S 14

1926

from which,

A pinion 14 ins. in diam. bears N47°E.190 lks. dist.,
 marked T34N.,R12W.,S11 BT.
 A cedar 20 ins. in diam. bears S83°E.260 lks. dist.,
 marked T34N.,R12W.,S14 BT.
 A cedar 10 ins. in diam. bears S71°W.536 lks. dist.,
 marked T34N.,R12W.,S15 BT.
 A pinion 6 ins. in diam. bears N42°W.196 lks. dist.,
 marked T34N.,R12W.,S10 BT.

Land, rolling.

Soil, sandy and stony 3rd. and 4th. rate.

Timber, cedar and pinion.

Undergrowth, sagebrush.

S89°59'E. on a random line bet. secs. 11 and 14.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.10 Intersect N. and S. line 2 lks. S. of the cor. of secs.
 11, 12, 13, and 14.

Thence
 West on true line bet. secs. 11 and 14.
 Ascend 86 ft. over NE. slope over rolling land through
 cedar and pinion timber.

1.00 Top of spur slopes NW.
 Descend over SW. slope.

8.10 Wash 20 lks. wide 1 ft. deep, course NW.
 Ascend over NE. slope.

18.10 Top of spur slopes NW.
 Descend 29 ft. over SW. slope.

26.10 Wash 50 lks. wide 1 ft. deep, course NE.
 Ascend 23 ft. over SE. slope.

30.10 Top of spur, slopes NW.
 Descend 23 ft. over SW. slope.

32.30 Wash 50 lks. wide 2 ft. deep, course NE.
 Ascend 23 ft. over SE. slope.

40.00 Top of steep ascent, ascend gradually.

40.05 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the
 ground for $\frac{1}{4}$ sec. cor., marked on brass cap.

Subdivision of T 34 N., R 12 W.

Chains

$$\frac{1}{4} \begin{array}{l} S 11 \\ S 14 \end{array}$$

1926

from which,

- A pinion 24 ins. in diam. bears N67°W. 29 lks. dist.,
marked $\frac{1}{4}$ S11 BT.
- A cedar 4 ins. in diam. bears S24°E. 30 lks. dist.,
marked $\frac{1}{4}$ S14 BT.
- 41.60 Top of spur slopes SE.
Descend over SW. slope.
- 53.10 Wash 50 lks. wide 2 ft. deep, course S.
Ascend 40 ft. over E. slope.
- 70.60 Top of spur slopes S.
Descend 23 ft. over W. slope to
- 80.10 The cor. of secs. 10, 11, 14, and 15.

Land, rolling.

Soil, sandy and stony 3 rd. and 4 th. rate.
Timber, cedar and pinion.
Undergrowth, sagebrush.

- N 0°08'W. bet. secs. 10 and 11.
Ascend 75 ft. over SW. slope over rolling land, through
cedar and pinion timber.
- 25.00 Top of ridge bears NW. and SE.
Descend over NE. slope.
- 29.00 Head of shallow draw, course NE.
Ascend over SE. slope. 29 ft.
- 32.00 Top of spur slopes NE.
Descend over NW. slope.
- 39.50 Head of wash course NE.
Ascend 40 ft. over SE. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 14 ins. in
the ground to bedrock, supported by a mound of
stone 2 ft. base $1\frac{1}{2}$ ft. high for $\frac{1}{4}$ sec. cor.
marked on brass cap

$$\frac{1}{4} \begin{array}{l} S 10 \\ S 11 \end{array}$$

1926

from which,

- A cedar 40 ins. in diam. bears N43°E. 102 lks. dist.,
marked $\frac{1}{4}$ S11 BT.
- A cedar 6 ins. in diam. bears S29°W. 21 lks. dist.,
marked $\frac{1}{4}$ S10 BT.
- 45.00 Top of spur slopes NE.
Descend 63 ft. over NW. slope.
- 56.00 Head of wash 20 lks. wide 2 ft. deep course NE.
Ascend over SE. slope.
- 60.00 Top of spur slopes NE.
Descend 134 ft. over abrupt NW. slope into the Parashont
Wash
- 75.55 Cross the Parashont Wash 50 lks. wide 2 ft. deep with
rock bottom course E.
Ascend about 23 ft. over S. slope

Subdivision of T 34 N., R 12 W.

Chains

80.00 Set an iron post 3 ft. long. 2 ins. in diam. with marked stone at the base, 16 ins. in the ground to bedrock, and raise a mound of stone 2 ft. base 1½ ft. high around the post for cor. of secs. 2, 3, 10, and 11., marked on brass cap.

T34N	R12W
S 3	S 2
S 10	S 11

1926

from which,

A cedar 12 ins. in diam. bears N49°E. 220 lks. dist., marked T34N., R12W., S2 BT.

A cedar 8 ins. in diam. bears S7°E. 68 lks. dist., marked T34N., R12W., S11 BT.

A cedar 8 ins. in diam. bears S65°W. 161 lks. dist., marked T34N., R12W., S10 BT.

No other bearing trees available.

Land, rolling.
Soil, sandy and stony 3 rd. and 4 th. rate.
Timber, cedar and pinon.
Undergrowth, sagebrush.

40.00 East on a random line bet. secs. 2 and 11.
Set temp. ¼ sec. cor.

80.08 Intersect N. and S. line at the cor. of secs. 1, 2, 11, and 12.

Thence
West on true line bet. secs. 2 and 11.
Ascend 36 ft. over SE. slope over rolling land, through cedar and pinon timber

3.18 Top of spur slopes S.
Descend over W. slope.

13.18 Shallow draw 20 lks. wide course S.
Ascend E. slope.

28.18 Top of spur slopes S.
Descend 29 ft. over W. slope.

33.08 Wash 50 lks. wide 2 ft. deep course S.
Ascend 46 ft. over E. slope.

38.08 Top of spur slopes S.
Descend over W. slope.

38.18 Set an iron post 3 ft. long., 1 in. in diam. 14 ins. in the ground to bedrock, supported by a mound of stone 2 ft. base 1½ ft. high for witness cor. to the ¼ sec. cor., marked on brass cap

WC ¼	S 2
	S 11

1926

from which,

A cedar 6 ins. in diam. bears N39°W. 112 lks. dist., marked WC ¼ S2 BT.

A cedar 10 ins. in diam. bears S33°E. 65 lks. dist.,

Subdivision of T 34 N., R12 W.

Chains	marked WC $\frac{1}{4}$ S11 BT.
40.04	The true point for $\frac{1}{4}$ sec. cor. falls on steep slope where a permanent cor can not be established; Witness cor. established at 38.18 chs. as hereinbefore described..
53.08	Wash 20 lks. wide 2 ft. deep, course S. Ascend over E. slope.
56.58	Top of spur slopes S. Descend over SW. slope.
58.08	Cross the Parashont Wash 50 lks. wide 3 ft. deep course S80°E. Ascend gradually over NE. slope.
64.58	Top of low spur, slopes NE. Descend over NW. slope.
68.08	Cross the Parashont Wash 100 lks. wide 2 ft. deep, course N70°E. Ascend gradually over SE. slope to
80.08	The cor. of secs. 2, 3, 10, and 11. Land rolling and broken. Soil, sandy and stony 3 rd. and 4th. rate. Timber, cedar and pinion. Undergrowth, sagebrush.
40.00	N 0°06' W. on a random line bet. secs. 2 and 3. Set temp. $\frac{1}{4}$ sec. cor.
78.78	Intersect N. bdy. of Tp. 3 lks. W. of the cor. of secs. 2, 3, 34, and 35, hereinbefore described. Thence S 0°06' E. on true line bet. secs. 2 and 3. Ascend NE. slope over rolling stony land, through cedar and pinion timber.
2.28	Top of spur slopes SE. Descend over SW. slope.
2.78	Wash 20 lks. wide 2 ft. deep course SE. Ascend over NE. slope.
13.78	Top of spur slopes SE. Descend 49 ft. over SW. slope.
33.78	Wash 50 lks. wide course SW. Ascend 29 ft. over NW. slope.
38.78	Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base, 20 ins. in the ground to bedrock, and raise a mound of stone around the post for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\begin{array}{c} \frac{1}{4} \\ \\ S \ 3 \ \ S \ 2 \end{array}$
	1926
43.78	No bearing trees within limits. Top of spur slopes SW.; Descend over SE. slope
46.78	Road bears NE. and SW.
47.28	Wash 20 lks. wide 3 ft. deep, course SW. Ascend over NW. slope.
52.28	Top of spur slopes NW. Descend 29 ft. over SW. slope.
54.78	Wash 20 lks. wide 1 ft. deep course NW. Ascend over NE. slope.
62.28	Top of spur slopes SW. Descend 63 ft. over SE. slope to
78.78	The cor. of secs. 2, 3, 10, and 11. Land, rolling. Soil, sandy and stony 3rd. and 4th. rate.

Subdivision of T 34 N., R 12 W.

Chains

Timber, cedar and pinion.
Undergrowth, sagebrush.

From the cor. of secs. 3, 4, 33, and 34 on S. bdy. of Tp. established by William H Thorn, U.S. Surveyor, in 1917 under Group No. 73 Arizona, which is an iron post 3 ins. in diam. projecting 12 ins. above ground firmly set with brass cap marked

T34N | R12W
S 33 | S 34
S 4 | S 3
T33N
1917

from which,

- A cedar 8 ins. in diam. bears N22°E. 46 lks. dist., marked T34N., R12W., S34 BT.
- A cedar 12 ins. in diam. bears S63°E. 35 lks. dist., marked T33N., R12W., S3 BT.
- A pinion 14 ins. in diam. bears S79°W. 132 lks. dist., marked T33N., R12W., S4 BT.
- A cedar 8 ins. in diam. bears N19°W. 113 lks. dist., marked T34N., R12W., S33 BT.

Thence

N 0°09'W. on true line bet. secs. 33 and 34.

Descend 97 ft. over NW. slope over rolling land through cedar and pinion timber.

39.90 Wash 5 lks. wide 1 ft. deep course NW.

Ascend 132 ft. over SW. slope.

40.00 Set an iron post 3 ft. long 1 in. in diam. 6 ins. in the ground to bedrock, supported by a mound of stone 3 ft. base 2 ft. high for 1/4 sec. cor., marked on brass cap.

1/4
S 33 | S 34

1926

from which,

- A cedar 4 ins. in diam. bears N82°E. 106 lks. dist., marked 1/4 S34 BT.
- A cedar 5 ins. in diam. bears S84°W. 102 lks. dist., marked 1/4 S33 BT.

70.00 Top of spur slopes SW.

Descend over NW. slope.

79.00 Draw 1 ft. deep course NW.

Ascend gradually over SW. slope to

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 6 ins. in the ground to bedrock, supported by a mound of stone 3 ft. base 2 ft. high for cor. of secs. 27, 28, 33, and 34. marked on brass cap

T34N | R12W
S 28 | S 27
S 33 | S 34

1926

from which

Subdivision of T 34 N., R 12 W.

Chains

A cedar 5 ins. in diam. bears N5°E. 33 lks. dist.,
marked T34N., R12W., S27 BT.
A cedar 6 ins. in diam. bears S70°E. 128 lks. dist.,
marked T34N., R12W., S34 BT.
A cedar 8 ins. in diam. bears S52°W. 88 lks. dist.,
marked T34N., R12W., S33 BT.
A cedar 20 ins. in diam. bears N55°W. 93 lks. dist.,
marked T34N., R12W., S28 BT.

Land, rolling.
Soil, sandy and stony 3rd. and 4th. rate.
Timber, cedar and pinion.
Undergrowth, sagebrush.

40.00 N 89°59'E. on a random line bet. secs. 27 and 34.
Set temp. $\frac{1}{4}$ sec. cor.
80.00 Intersect N. and S. line 2 lks. N. of the cor. of secs.
26, 27, 34, and 35.
Thence
West on true line bet. secs. 27 and 34.
Descend 60 ft. over NW. slope over rolling land, through
cedar and pinion timber.
1.00 Wash 50 lks. wide 1 ft. deep course N.
Ascend 60 ft. over E. slope.
20.00 Top of spur slopes SW.
Descend over NW. slope.
25.00 Leave timber bears N. and S.
35.00 Draw 1 ft. deep course SW.
Ascend over SE. slope.
40.00 Set an iron post 3 ft. long, 1 in. in diam. 16 ins. in
the ground to bedrock, supported by a mound of
stone 2 ft. base $1\frac{1}{2}$ ft. high for $\frac{1}{4}$ sec. cor.
marked on brass cap

$\frac{1}{4}$ S 27
S 34

1926

from which,

A cedar 36 ins. in diam. bears N6°W. 143 lks. dist.,
marked $\frac{1}{4}$ S27 BT.
A cedar 6 ins. in diam. bears S20°E. 167 lks. dist.,
marked $\frac{1}{4}$ S 34 BT.
52.00 Enter timber bears NE. and SE.
59.00 Top of ridge bears N. and S.
Descend over SW. slope
65.00 Leave timber bears N. and S.; enter clearing
75.00 Leave clearing bears N. and S.; Enter cedar timber.
80.00 The cor. of secs. 27, 28, 33, and 34.

Land, rolling.
Soil, sandy 3rd. and 4th. rate.
Timber, cedar and pinion.
Undergrowth, sagebrush.

12.50 N 0°09'W. bet. secs. 27 and 28.
Descend NW. slope over rolling mountainous land, through
cedar and pinion timber.
Draw 10 lks. wide 1 ft. deep course SW.
Ascend over SE. slope.

Subdivision of T 34 N., R 12 W.

Chains

- 20.00 Top of spur slopes SE.
Descend over NE. slope.
- 28.00 Leave timber bears NW. and SE.
- 31.00 Swale course SE.
Ascend gradually over SW. slope.
- 35.00 Enter timber bears NW. and SE.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$$\begin{array}{c} \frac{1}{4} \\ | \\ S\ 28\ | S\ 27 \end{array}$$

1926

from which,

- A pinion 14 ins. in diam. bears S48°E. 19 lks. dist.
marked $\frac{1}{4}$ S27 BT.
- A cedar 10 ins. in diam. bears S23°W. 95 lks. dist.,
marked $\frac{1}{4}$ S28 BT.
- 50.00 Top of ridge bears NW. and SE.
Descend gradually over NE. slope.
- 65.00 Head of wash 20 lks. wide, course NE.
Ascend over SE. slope.
- 75.00 Top of ridge bears NE. and SW.
Descend over NW. slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 26 ins. in the ground for cor. of secs. 21, 22, 27, and 28., marked on brass cap

$$\begin{array}{c} T34N\ | R12W \\ S\ 21\ | S\ 22 \\ \hline S\ 28\ | S\ 27 \end{array}$$

1926

from which,

- A cedar 14 ins. in diam. bears N73°E. 120 lks. dist.,
marked T34N., R12W., S22 BT.
- A cedar 12 ins. in diam. bears S75°E. 40 lks. dist.,
marked T34N., R12W., S27 BT.
- A cedar 12 ins. in diam. bears S14°W. 74 lks. dist.,
marked T34N., R12W., S28 BT.
- A cedar 8 ins. in diam. bears N81°W. 39 lks. dist.,
marked T34N., R12W., S21 BT.

Land, rolling mountainous.
Soil, sandy and stony 3rd. and 4th. rate.
Timber, cedar and pinion.
Undergrowth, sagebrush.

- 40.00 East on a random line bet. secs. 22 and 27.
Set temp. $\frac{1}{4}$ sec. cor.
- 79.92 Intersect N. and S. line at the cor. of secs. 22, 23, 26,
and 27.
- Thence
West on true line bet. secs. 22 and 27.
Descend 149 ft. over NW. slope over rolling mountainous
land, through cedar and pinion timber and
brush undergrowth.

Subdivision of T34N R12 W.

Chains

- 14.42 Wash 50 lks. wide 2 ft. deep, course NE.
Ascend 57 ft. over SE. slope.
- 34.92 Top of spur slopes NE.
Descend 34 ft. over NW. slope.
- 39.96 Set an iron post 3 ft. long, 1 in. in diam. 12 ins. in the
ground to bedrock, supported by a mound of stone
2 ft. base $1\frac{1}{2}$ ft. high for $\frac{1}{4}$ sec. cor., marked
on brass cap

$$\frac{1}{4} \begin{array}{l} S 22 \\ S 27 \end{array}$$

1926

from which,

- A cedar 6 ins. in diam. bears N53 $\frac{1}{2}$ °W. 89 lks. dist.,
marked $\frac{1}{4}$ S22. BT.
- A cedar 8 ins. in diam. bears S76°E. 82 lks. dist.,
marked $\frac{1}{4}$ S27 BT.
- 41.42 Draw 20 lks. wide, course NW.
Ascend over NE. slope.
- 53.92 Top of spur slopes NW.
Descend 34 ft. over SW. slope..
- 54.92 Leave timber bears N. and S.
- 62.92 Draw 10 lks. wide course NE.
Ascend 75 ft. over SE. slope.
- 64.92 Enter timber bears N. and S.
- 75.92 Top of ridge bears NE. and SE.
Descend 29 ft. over NW. slope. to
- 79.92 The cor. of secs. 21, 22, 27, and 28.

Land, rolling mountainous.
Soil, sandy and stony, 3rd. and 4th. rate.
Timber, cedar and pinion.
Undergrowth, sagebrush.

N 0°09'W. bet. secs. 21 and 22.

Descend NW. slope over hilly land through cedar and pinion
timber.

- 7.00 Draw 10 lks. wide course NW.
Ascend over SW. slope.
- 15.00 Top of spur slopes NW.
Descend 115 ft. over NE. slope.
- 37.00 Draw 20 lks. wide course NW.
Ascend over SW. slope.
- 38.00 Leave timber bears E. and W.
- 39.00 Top of spur slopes NW.
Descend over NE. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the
ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\frac{1}{4} \begin{array}{l} S 21 \\ S 22 \end{array}$$

1926

from which,

- A cedar 13 ins. in diam. bears S18°E. 253 lks. dist.,
marked $\frac{1}{4}$ S22 BT.
- A cedar 12 ins. in diam. bears S3°W. 277 lks. dist.,
marked $\frac{1}{4}$ S21 BT.

Subdivision of T 34 N., R 12 W.

Chains

- 49.30 Wash 20 lks. wide course NE.
Ascend 69 ft. over SE. slope.
- 52.00 Top of spur slopes NE.
Descend over NW. slope.
- 53.00 Foot of descent, enter bottom land bears NE. and SW.
- 55.60 Road bears NE. and SW.
- 58.00 Cross the Parashont Wash 100 lks. wide 3 ft. deep
course NE.
Ascend SE, slope
- 61.00 Top of spur slopes SE.
Descend over NE. slope.
- 66.50 Cross the Parashont Wash 100 lks. wide 3 ft. deep, course
NW.
Ascend over SW. slope. 69 ft.
- 72.00 Top of spur slopes SW.
Descend over NW. slope.
- 74.00 Wash 20 lks. wide 2 ft. deep. course SW.
Ascend over SE. slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. with marked
stone at the base 12 ins. in the ground to
bedrock, and raise a mound of stone around the
post for cor. of secs. 15, 16, 21, and 22., marked
on brass cap

T34N	R12W
S 16	S 15
S 21	S 22

1926

from which,

A cedar 20 ins. in diam. bears N80°W. 412 lks. dist.,
marked T34N., R12W., S16 BT.
No other bearing trees within limits.

Land, hilly.
Soil, sandy and stony 3rd. and 4th. rate.
Timber, cedar and pinion.
Undergrowth, sagebrush and cactae.

- 40.00 East on a random line bet. secs. 15 and 22.
Set temp. $\frac{1}{4}$ sec. cor.
- 79.92 Intersect N. and S. line 10 lks. S. of the cor. of secs.
14, 15, 22, and 23.
Thence
S 89°56'W. on true line bet. secs. 15 and 22.
Ascend NE. slope over rolling sandy land through cedar
and pinion timber.
- 15.00 Top of ridge bears NW. and SE.
Descend over SW. slope.
- 37.00 Leave timber bears NW. and SE.
- 39.96 Set an iron post 3 ft. long, 1 in. in diam. 10 ins. in the
ground to bedrock, deposit a marked stone alongside,
and raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high
around the post for $\frac{1}{4}$ sec. cor., marked on brass
cap

$\frac{1}{4}$ S 15
S 22

1926

48.00 Swale, course S.


Subdivision of T34 N., R 12 W.

Chains


- 50.00 Ascend 58 ft. over E. slope.
- 67.50 A point from which a corral bears S. about 50 chs. dist.
- 79.92 Top of spur slopes SW.
Descend over W. slope to
The cor. of secs. 15, 16, 21, and 22.

Land, rolling.
Soil, sandy and stony 3rd. and 4th. rate.
Timber, cedar and pinion.
Undergrowth, sagebrush and cactae.

- 5.00 N 0°09'W. bet. secs. 15 and 16.
Ascend 23 ft. over S. slope over rolling mountainous land
through scattering timber and undergrowth.
- 20.00 Top of spur slopes W.
Descend 98 ft. over N. slope.
- 21.50 Wash 10 lks. wide course NW.
Ascend 29 ft. over SW. slope.
- 23.00 Point of spur slopes W.
Descend over NW. slope.
- 28.00 Wash 20 lks. wide course W.
Ascend 17 ft. over SW, slope.
- 30.00 Top of spur slopes W.
Descend 23 ft. over N. slope.
- 40.00 Foot of descent; leave rolling mountainous land bears NE.
and SW.; enter level bottom land.
Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the
ground for 1/4 sec. cor. marked on brass cap



- 46.50 No bearing trees within limits.
Raise a mound of stone 3 ft. base 2 ft. high W. of cor.
Cross the Parashont Wash 100 lks. wide 2 ft. deep course
NE.
Leave level bottom land bears NE. and SW.; Enter rolling
mountainous land.
- 47.60 Ascend over SE. slope.
- 48.00 Road from St. George Utah to Wildcat bears NE. and SW.
Top of spur slopes NE.
Descend over NW. slope.
- 64.80 Cross the Parashont Wash, 100 lks. wide, 2 ft. deep, course NW.
- 70.00 Low spur, slopes NW.
- 74.50 Parashont Wash, course NE. Asc. 46 ft. over SE. slope.
- 78.00 Top of spur slopes NE.
Descend over NW. slope.
- 79.50 Head of wash 10 lks. wide 2 ft. deep course NE.
Ascend over SE. slope to
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. with marked
stone at the base 8 ins. in the ground to bedrock,
and raise a mound of stone 3 ft. base 2 ft. high
around the post for cor. of secs. 9, 10, 15, and 16.,
marked on brass cap



Subdivision of T 34 N., R 12 W.

Chains

from which,
 A cedar 8 ins. in diam. bears N4°E. 273 lks. dist.,
 marked T34N., R12W., S10 BT.
 A cedar 4 ins. in diam. bears N48°W. 17 lks. dist.,
 marked BT. only.
 A cedar 10 ins. in diam. bears N41°W. 433 lks. dist.,
 marked T34N., R12W., S9 BT.
 No other bearing trees within limits.

Land, level and mountainous.
 Soil, sandy and stony 3rd. and 4th. rate.
 Timber, cedar and pinion.
 Undergrowth, sagebrush and cactae.

40.00 N 89°56'E. on a random line bet. secs. 10 and 15.
 79.92 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect N. and S. line at the cor. of secs. 10, 11, 14, and 15.

Thence
 S89°56'W. on true line bet. secs. 10 and 15
 Descend SW. slope over rolling sandy and stony land through scattering timber.

4.20 Wash 10 lks. wide course SE.
 Ascend gradually over SE. slope.
 51.90 Road bears NW. and SE.
 17.00 Top of ridge bears N. and S.
 Descend over W. slope.
 20.00 Wash course NW.
 Ascend over NE. slope.
 30.00 Top of spur slopes NW.
 Descend 40 ft. over SW. slope.
 37.40 Wash 10 lks. wide course NW.
 Ascend over NE. slope.
 39.96 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brasscap

$\frac{1}{4}$ S 10
 S 15

1926

from which,

A cedar 8 ins. in diam. bears N80°W. 357 lks. dist.,
 marked $\frac{1}{4}$ S10 BT.
 A cedar 14 ins. in diam. bears S48°W. 207 lks. dist.,
 marked $\frac{1}{4}$ S15 BT.
 45.00 Top of spur slopes NW.
 Descend gradually over SW. slope.
 50.10 Cross the Parashont Wash 100 lks. wide 2 ft. deep, course N.
 Ascend over E. slope.
 56.72 Road from St. George Utah to Wildcat, bears N. and S.
 70.50 Wire fence line bears N. and S.
 79.92 The cor. of secs. 9, 10, 15, and 16.

Land, rolling.
 Soil, sandy and stony 3rd. and 4th. rate.
 Timber, cedar and pinion.
 Undergrowth, sagebrush and cactae.

Subdivision of T 34 N., R 12 W.

Chains

- N 0°09'W. bet. secs. 9 and 10.
Ascend 20 ft. over SE. slope over stony mountainous land,
through cedar and pinion timber.
- 3.50 Top of ridge bears NE. and SW.
Descend over NW. slope.
- 20.00 Wash 75 lks. wide 2 ft. deep course E.
Ascend 96 ft. over SW. slope.
- 31.00 Top of ridge bears NW. and NE.
Descend 46 ft. over NW. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the
ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S 9 | S 10

1926

from which,

- A cedar 4 ins. in diam. bears N40°E. 87 lks. dist.,
marked BT. only.
- A cedar 6 ins. in diam. bears S21°W. 20 lks. dist.,
marked $\frac{1}{4}$ S9 BT.
- From this point the NW. cor. of "Brush pocket" corral bears
S80°E. 13.50 chs. dist.; Water hole in corral
- 42.00 Draw 10 lks. wide course NE.
Ascend over SE. slope.
- 52.50 Top of spur slopes E.
A house bears N80 $\frac{1}{2}$ °E. about 6.00 chs. dist.
Descend over N. slope.
- 56.00 Old road bears E. and W.
- 58.00 A point from which a brush corral bears E. about 2.00 chs.
dist.
- 58.50 Wash 20 lks. wide 2 ft. deep course SE.
Ascend 57 ft. over SW. slope.
- 74.00 Top of spur slopes SE.
Descend 11 ft. over NE. slope to
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 26 ins. in
the ground for cor. of secs. 3, 4, 9, and 10., marked
on brass cap

T34N | R12W
S 4 | S 3
S 9 | S 10

1926

from which,

- A cedar 4 ins. in diam. bears N61°E. 172 lks. dist.,
marked BT. only.
- A cedar 6 ins. in diam. bears S13 $\frac{1}{2}$ °E. 54 lks. dist.,
marked T34N., R12W., S10 BT.
- A cedar 4 ins. in diam. bears S40°W. 157 lks. dist.,
marked BT. only.
- A cedar 20 ins. in diam. bears N21°W. 167 lks. dist.,
marked T34N., R12W., S4 BT.

Land, mountainous.

Soil, sandy and stony 3rd. and 4th. rate.

Timber, cedar and pinion.

Undergrowth, sagebrush and cactae.

Subdivision of T 34 N., R 12 W.

Chains
 40.00 N 89°56'E. on a random line bet. secs. 3 and 10
 Set temp. $\frac{1}{4}$ sec. cor.
 79.92 Intersect N. and S. line 5 lks. S. of the cor. of secs. 2, 3, 10, and 11.
 Thence
 S 89°54'W. on true line bet. secs. 3 and 10.
 Over stony mountainous land through scattering cedar and pinion timber.
 8.70 Descend bluff 30 ft. high along the Parashont Wash, bears NW. and SE.
 9.80 Foot of descent in the Parashont Wash 100 lks. wide course SE.
 Ascend over NE. slope. 34 ft.
 12.00 Road bears NE. and SW.
 15.70 Top of spur slopes NW.
 Descend over SW. slope.
 17.90 Road from St. George Utah to Wildcat bears N. and S.
 21.50 Branch of same road bears NE. and SW.
 22.00 Cross the Parashont Wash 100 lks. wide course NE.
 Ascend 23 ft. over SE. slope.
 39.96 Set an iron post 3 ft. long, 1 in. in diam. 6 ins. in the ground to bedrock, supported by a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 3
 S 10

1926

from which

A cedar 10 ins. in diam. bears North 23 lks. dist., marked $\frac{1}{4}$ S3 BT:
 A cedar 5 ins. in diam. bears S20°E. 33 lks. dist., marked $\frac{1}{4}$ S10 BT.
 45.00 Top of spur slopes S.
 Descend 23 ft. over W. slope.
 51.10 Cross the Parashont Wash 100 lks. wide course SE.
 Ascend over NE. slope.
 58.00 Top of spur slopes NW.
 Descend over SW. slope. 19 ft.
 60.70 Cross the Parashont Wash 100 lks. wide course NE.
 Ascend 20 ft. over SE. slope.
 70.00 Top of spur slopes S.
 Descend over SW. slope.
 75.00 Wash 20 lks. wide course SE.
 Ascend over NE. slope. to
 79.92 The cor. of secs. 3, 4, 9, and 10.


Land, rolling and broken.
 Soil, sandy and stony 3rd. and 4th. rate.
 Timber, scattering cedar and pinion.
 Undergrowth, sagebrush and cactae.

40.00 N 0°09'W. on a random line bet. secs. 3 and 4.
 Set temp. $\frac{1}{4}$ sec. cor.
 78.74 Intersect N. bdy. of Tp. at the cor. of secs. 3, 4, 33, and 34, hereinbefore described.
 Thence
 S 0°09'E. on true line bet. secs. 3 and 4.
 Ascend NW. slope over rolling stony land, through cedar and pinion timber and brush undergrowth.
 3.74 Top of spur slopes NE.
 Descend 32 ft. over SE. slope.

Subdivision of T 34 N., R 12 W.

Chains

- 8.74 Swale, course NE.
Ascend over NW. slope.
- 13.74 Top of ridge bears NE and SW.
Descend 115 ft. over SE. slope.
- 23.74 Wash 20 lks. wide 2 ft. deep course SE.
Ascend over NE. slope.
- 26.74 Top of spur slopes NE.
Descend 113 ft. over SE. slope.
- 38.74 Set an iron post 3 ft. long, .1 in. in diam. 26 ins. in the
ground for $\frac{1}{4}$ sec. cor. marked on brass cap




1926

from which,

- A cedar .8 ins. in diam. bears N41°E. 440 lks. dist.,
marked $\frac{1}{4}$ S 3 BT.
- A cedar 10 ins. in diam. bears S86°W. 210 lks. dist.,
marked $\frac{1}{4}$ S 4 BT.
- 40.44 Wash 50 lks. wide 2 ft. deep course NE.
Ascend 26 ft. over NE. slope.
- 48.54 Top of spur slopes NE.
Descend 88 ft. over SE. slope.
- 62.24 Wash 25 lks. wide 2 ft. deep course SE.
Ascend 29 ft. over NE. slope.
- 72.24 Top of spur slopes NE.
Descend 16 ft. over SE. slope.
- 76.74 Wash 50 lks. wide 2 ft. deep course NE.
Ascend gradually over NW. slope to
- 78.74 The cor. of secs. 3, 4, 9, and 10.

Land, rolling and broken.
Soil, sandy and stony 3rd. and 4th. rate.
Timber, cedar and pinion.
Undergrowth, sagebrush and cactae.

From the cor. of secs. 4, 5, 32, and 33 on S. bdy. of Tp.,
established by William H Thorn, U.S. Surveyor, in
1917 under Group 73 Arizona, which is an iron post
3 ins. in diam. projecting 12 ins. above ground,
firmly set, with brass cap marked




Witnessed by four pits, one in each sec. NE., SE., SW., and NW
of cor.

- Thence
N 0°10'W. on true line bet. secs. 32 and 33
Descend NE. slope over rolling stony land, through
scattering cedar and pinion timber.
- 12.00 Draw 5 lks. wide course NW.
Ascend over SW. slope.
- 20.00 Top of spur slopes NW.
Descend over NE. slope.
- 23.50 Draw 50 lks. wide course NE.

Subdivision of T 34 N., R 12 W.


Chains

- Ascend 29 ft. over SE. slope.
- 30.00 Top of spur slopes NE.
- Descend over NE. slope.
- 31.00 Head of draw 12 lks. wide 1 ft. deep course NE.
- Ascend over SE. slope.
- 35.00 Top of spur slopes NE.
- Descend over NW. slope.
- 37.00 Shallow draw 10 lks. wide course NE.
- Ascend over SE. slope.
- 40.00 Top of spur slopes NE.; Set an iron post 3 ft. long, 1 in. in diam. 12 ins. in the ground to bedrock, deposit a limestone 6x6x4 ins. marked with a cross (x) alongside, and raise a mound of stone 3 ft. base 2 ft. high around the post for $\frac{1}{4}$ sec. cor., marked on brass cap



1926

- No bearing trees within limits.
- Descend over NW. slope.
- 47.00 Draw course NE.
- Ascend over SE. slope.
- 50.00 Top of spur slopes E.
- Descend 23 ft. over N. slope.
- 56.80 Wash 10 lks. wide course SE
- Ascend 92 ft. over SW. slope.
- 70.00 Top of spur slopes SE.
- 73.00 Descend 51 ft. over NE. slope. to
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 16 ins. in the ground to bedrock, supported by a mound of stone 3 ft. base 2 ft. high, for cor. of secs. 28, 29, 32, and 33. marked on brass cap



1926

from which,

- A cedar 12 ins. in diam. bears N51°E. 146 lks. dist., marked T34N., R12W., S28 BT.
- A cedar 14 ins. in diam. bears S4°E. 59 lks. dist., marked T34N., R12W., S33 BT.
- A cedar 4 ins. in diam. bears S67°W. 198 lks. dist., marked BT. only.
- A cedar 16 ins. in diam. bears N48°W. 142 lks. dist., marked T34N., R12W., S29 BT.

Land, hilly and rolling.
 Soil, sandy and stony 3rd. and 4th. rate.
 Timber, cedar and pinion.
 Undergrowth, sagebrush and cactae.

- 40.00 N 89°59'E. on a random line bet. secs. 28 and 33.
 Set temp. $\frac{1}{4}$ sec. cor.


Subdivision of T 34 N., R 12 W.

Chains	
80.04	Intersect N. and S. line 2 lks. S. of the cor. of secs. 27, 28, 33, and 34. Thence S89°58'W. on true line bet. secs. 28 and 33. Descend SW. slope over rolling sandy land, through cedar and pinion timber.
12.00	Shallow swale, course S. Ascend over E. slope.
20.00	Top of ridge bears N. and S. Descend over SW. slope. 29 ft.
28.00	Shallow swale course SW. Ascend over SE. slope.
39.00	Top of spur slopes SW.; Leave timber bears N. and S. Descend over NW. slope.
40.02	Set an iron post 3 ft. long, 1 in. in diam. 6 ins. in the ground to bedrock, supported by a mound of stone 3 ft. base 2 ft. high for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ $\frac{S 28}{S 33}$
	1926
	from which,
	A cedar 8 ins. in diam. bears N63°W. 141 lks. dist., marked $\frac{1}{4}$ S28 BT.
	A cedar 14 ins. in diam. bears S4°W. 144 lks. dist., marked $\frac{1}{4}$ S33 BT.
	Descend 182 ft. over SW. slope.
51.89	Cross the Parashont Wash 100 lks. wide 3 ft. deep course NW. Ascend 73 ft. over NE. slope.
53.50	Road from St. George Utah to Wildcat, bears NW. and SE.
60.00	Top of spur slopes NE. Descend 12 ft. over NW. slope.
63.50	Head of wash 20 lks. wide 2 ft. deep, course NE. Ascend over SE. slope.
70.50	Top of spur slopes NE. Descend over NW. slope.
75.00	Wash 20 lks. wide course NE.; Enter scattering timber bears N. and S. Ascend over SE. slope. to
80.04	The cor. of secs. 28, 29, 32, and 33. Land, rolling and mountainous. Soil, sandy and stony 3rd. and 4th. rate. Timber, cedar and pinion. Undergrowths sagebrush and cactae.
	N 0°00'W. bet. secs. 28 and 29. Ascend SE. slope over stony land, through scattering cedar and pinion timber and brush, undergrowth.
5.00	Top of spur slopes E. Descend over N. slope.
6.80	Wash 20 lks. wide 2 ft. deep course SE. Ascend 61 ft. over SW. slope
13.50	Top of spur slopes E. Descend 50 ft. over N. slope.
23.64	Wash 50 lks. wide 2 ft. deep course NE. Ascend 16 ft. over SE. slope
36.50	Top of spur slopes E. Descend 24 ft. over NE. slope.

Subdivision of T 34 N., R 12 W.

Chains

40.00 Set an iron post 3 ft. long, 1 in. in diam. 12 ins. in the ground to bedrock, deposit a stone marked with a cross (x) alongside, and raise a mound of stone 3 ft. base 2 ft. high around the post for 1/4 sec. cor. marked on brass cap.



1926

No bearing trees within limits.

43.50 Wash 20 lks. wide 2 ft. deep course SE. Ascend 23 ft. over SW. slope.

55.00 Top of spur slopes SE.

Descend 52 ft. over NE. slope.

60.50 Road from St. George Utah to Pigeon, bears N75°W. and S75°E


62.00 Wash 50 lks. wide 3 ft. deep course SE.

Ascend 90 ft. over SW. slope.

73.00 Top of spur slopes E.

Descend over N. slope.

80.00 Set an iron post 3 ft. long 2 ins. in diam. 12 ins. in the ground to bedrock, supported by a mound of stone 3 ft. base 2 ft. high for cor. of secs. 20, 21, 28, and 29., marked on brass cap



1926

from which,

A cedar 20 ins. in diam. bears N25°E. 84 lks. dist., marked T34N., R12W., S21 BT.

A cedar 24 ins. in diam. bears S77°E. 124 lks. dist., marked T34N., R12W., S28 BT.

A cedar 4 ins. in diam. bears S80°W. 288 lks. dist., marked BT. only.

A cedar 14 ins. in diam. bears N55°W. 247 lks. dist., marked T34N., R12W., S20 BT.

Land, rolling and mountainous.
Soil, stony and sandy 3rd. and 4th. rate.
Timber, cedar and piñon.
Undergrowth, sagebrush.

40.00 N 89°58'E. on a random line bet. secs. 21 and 28. Set temp. 1/4 sec. cor.

79.84 Intersect N. and S. line 14 lks. N. of the cor. of secs. 21, 22, 27, and 28.

Thence

N 89°56'W. on true line bet. secs. 21 and 28.

Over rolling sandy land, through scattering cedar and piñon timber.

5.84 Begin descent over NW. slope.

18.34 West edge of mesa.; Descend 142 ft. over broken stony NW. slope

Subdivision of T 34 N., R 12 W.

Chains

- 24.84. Leave timber bears N. and S.
 29.34 Wash 20 lks. wide 2 ft. deep course NW.
 Ascend over NE. slope.
 37.34 Top of spur slopes NW.
 Descend over SW. slope.
 39.92 Set an iron post 3 ft. long 1 in. in diam. 24 ins. in the
 ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\frac{1}{4} \begin{array}{l} S 21 \\ S 28 \end{array}$$

1926

- 42.34 Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.
 Wash 20 lks. wide 2 ft. deep course NW.
 Ascend over NE. slope.
 44.84 Top of spur slopes NW.
 Descend 75 ft. over SW. slope.
 54.84 Road from St. George Utah to Wildcat bears NE. and SW.
 56.84 Cross the Parashont Wash 100 lks. wide $2\frac{1}{2}$ ft. deep course
 NE.
 70.84 Wash 20 lks. wide 1 ft. deep course SE.
 Ascend over NE. slope.
 74.84 Enter scattering cedar and pinion timber, bears N. and S.
 79.84 The cor. of secs. 20, 21, 28, and 29.

Land, rolling mountainous.
 Soil, sandy and stony 3rd. and 4th. rate.
 Timber, cedar and pinion.
 Undergrowth, sagebrush.

N 0°00' W. bet. secs. 20 and 21.
 Descend NE. slope over rolling sandy land, through scattering
 timber.

- .35 Head of wash 20 lks. wide 2 ft. deep course SE.
 Ascend over SW. slope.
 3.50 Top of spur slopes SE.
 Descend 16 ft. over NE. slope.
 5.50 Wash 20 lks. wide 2 ft. deep course SE.
 Ascend 16 ft. over SW. slope.
 13.50 Top of spur slopes NE.
 Descend 173 ft. over NW. slope.
 35.50 Wash 100 lks. wide 2 ft. deep course SE.
 Ascend 46 ft. over SW. slope.
 38.00 Top of spur slopes SE.
 Descend over NE. slope.
 39.50 Wash 20 lks. wide 1 ft. deep course E.
 Ascend 78 ft. over S. slope.
 40.00 Set an iron post 3 ft. long, 1 in. in diam. over cross (x)
 on exposed bedrock, deposit stone 4x3x2 ins. marked
 with a cross (x) alongside, and raise a mound of
 stone 4 ft. base $2\frac{1}{2}$ ft. high around the post for
 $\frac{1}{4}$ sec. cor. marked on brass cap

$$\frac{1}{4} \begin{array}{l} S 20 \\ S 21 \end{array}$$

1926

No bearing trees within limits.

Subdivision of T 34 N., R 12 W.

Chains

- 56.00 Top of ridge bears NW. and E.
Descend over NE. slope.
- 61.00 Draw 20 lks. wide course SE.
Ascend over SW. slope.
- 70.00 Top of spur slopes NE.
Descend over NW. slope. 40 ft. to
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 14 ins. in the
ground to bedrock, supported by a mound of stone
3 ft. base 1½ ft. high for cor. of secs. 16, 17, 20,
and 21, marked on brass cap

T34N	R12W
S 17	S 16
S 20	S 21

1926

from which,

- A cedar 8 ins. in diam. bears N20°E. 201 lks. dist.,
marked T34N., R12W., S16 BT.
- A cedar 14 ins. in diam. bears S8°E. 286 lks. dist.,
marked T34N., R12W., S21 BT.
- A cedar 8 ins. in diam. bears S24°W. 280 lks. dist.,
marked T34N., R12W., S20 BT.
- A cedar 6 ins. in diam. bears N42°W. 387 lks. dist.,
marked T34N., R12W., S17 BT.

Land, rolling.
Soil, sandy and stony. 3rd. and 4th. rate.
Timber, cedar and pinion.
Undergrowth, sagebrush and cactaw.

- 40.00 S 89°56'E. on a random line bet. secs. 16 and 21.
Set temp. ¼ sec. cor.
- 79.78 Intersect N. and S. line 2 lks. S. of the cor. of secs.
15, 16; 21, and 22.
- Thence
N 89°57'W. on true line bet. secs. 16 and 21.
Ascend SE. slope over rolling land, through scattering
cedar timber.
- 5.50 Top of spur slopes SW.
Descend over SW. slope.
- 15.00 Wash 10 lks. wide 2 ft. deep course SW.
Ascend 74 ft. over SE. slope.
- 20.00 Top of spur slopes SW.
Descend over SW. slope.
- 25.50 Road from St. George Utah to Wildcat bears NW. and SE.
- 30.00 Cross the Parashont Wash 100 lks. wide 3 ft. deep, course
NE.
- Ascend 34 ft. over NE. slope.
- 35.00 Top of spur slopes NE.
Descend over NW. slope.
- 38.50 Head of wash 20 lks. wide 2 ft. deep course NE.
Ascend 52 ft. over SE. slope.
- 39.89 Set an iron post 3 ft. long, 1 in. in diam. 12 ins. in
the ground to bedrock, supported by a mound of
stone 2 ft. base 1½ ft. high for ¼ sec. cor. marked
on bras cap

¼ S 16
S 21

1926

Subdivision of T 34 N., R 12 W.

Chains.

from which,

- A cedar 14 ins. in diam. bears N82°E. 80 lks. dist.,
marked $\frac{1}{4}$ S16 BT.
A pinion 18 ins. in diam. bears S19°W. 57 lks. dist.,
marked $\frac{1}{4}$ S21 BT.
- 40.00 Top of spur slopes NE.
Descend over NW. slope.
- 45.78 Draw 20 lks. wide course NE.
Ascend over SE. slope.
- 47.78 Top of spur slopes NE.
Descend 29 ft. over NW. slope.
- 53.00 Wash 50 lks. wide 2 ft. deep course NE.
Ascend over SE. slope.
- 64.78 Top of spur slopes NE.
Descend over NW. slope.
- 72.78 Draw 10 lks. wide course NE.
Ascend over SE. slope to
- 79.78 The cor. of secs. 16, 17, 20, and 21.

Land rolling.

Soil sandy and stony. 3 rd. and 4 th. rate.
Timber, cedar and PINION.
Undergrowth, sagebrush and cactae.

N 0°00'W. bet. secs. 16 and 17.

Descend NW. slope over rolling sandy and stony land,
through cedar and pinion timber and brush
undergrowth.

- 3.50 Wash 20 lks. wide 2 ft. deep course NE.
Ascend 29 ft. over SE. slope.
- 15.00 Top of spur slopes SE.
Descend over NE. slope.
- 21.00 Wash 50 lks. wide 2 ft. deep course SE.
Ascend 74 ft. over SW. slope.
- 35.00 Top of ridge bears NE. and SW.
Descend over NW. slope.
- 36.00 Ravine 10 lks. wide course NE.
Ascend over SE. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in
the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

↑
S 17 | S 16
1926

from which,

- A cedar 6 ins. in diam. bears S20°W. 10 lks. dist.,
marked $\frac{1}{4}$ S17 BT.
A cedar 6 ins. in diam. bears S80°E. 11 lks. dist.,
marked $\frac{1}{4}$ S16 BT.
- 50.00 Top of spur slopes SE.
Descend over NE. slope.
- 62.50 Draw 20 lks. wide 2 ft. deep course SE.
Ascend over SW. slope.
- 65.00 Top of spur slopes SE.
Descend over NE. slope.
- 70.00 Draw 20 lks. wide course SE.
Ascend over SW. slope.
- 80.00 Top of ridge bears NW. and SE.; Set an iron post 3 ft. long
2 ins. in diam. 26 ins. in the ground for cor. of
secs. 8, 9, 16, and 17. marked on brass cap

Subdivision of T 34 N., R 12 W.

Chains

T34N	R12W
S 8	S 9
S 17	S 16

1926

from which,

- A cedar 4 ins. in diam. bears N5°E. 34 lks. dist.,
marked BT. only.
- A cedar 14 ins. in diam. bears S50°E. 186 lks. dist.,
marked T34N., R12W., S16 BT.
- A cedar 12 ins. in diam. bears S1°W. 332 lks. dist.,
marked T34N., R12W., S17 BT.
- A cedar 8 ins. in diam. bears N64°W. 20 lks. dist.,
marked T34N., R12W., S8 BT.

Land, rolling.

Soil, sandy and stony 3rd. and 4th. rate.

Timber, cedar and pinion.

Undergrowth, sagebrush and cactae.

40.00

S 89°57'E. on a random line bet. secs. 9 and 16.

79.78

Set temp. $\frac{1}{4}$ sec. cor.Intersect N. and S. line 8 lks. N. of the cor. of secs.
9, 10, 15, and 16.

Thence

N 89°54'W. on true line bet. secs. 9 and 16.

Ascend 40 ft. over SE. slope over rolling mountainous
land, through scattering cedar and pinion
timber.

5.00

Top of spur slopes SE.

Descend over SW. slope.

15.00

Draw 10 lks. wide course SW.

Ascend 34 ft. over SE. slope.

25.00

Top of ridge bears NW. and NE.

Descend over SW. slope.

32.00

Draw 10 lks. wide course SW.

Ascend over SE. slope.

37.00

Top of spur slopes SW.

Descend over SW. slope. 29 ft.

39.89

Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the
ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S 9
S 16

1926

from which,

- A cedar 8 ins. in diam. bears N9°W. 75 lks. dist.,
marked $\frac{1}{4}$ S9 BT.
- A cedar 8 ins. in diam. bears S27°W. 22 lks. dist.,
marked $\frac{1}{4}$ S16 BT.

48.78

Draw 20 lks. wide 2 ft. deep course SE.

Ascend over NE. slope to

79.78

The cor. of secs. 8, 9, 16, and 17.

Land, rolling and mountainous.

Soil, sandy and stony 3rd. and 4th. rate.

Timber, cedar and pinion.

Undergrowth, sagebrush.

Subdivision of T 34 N., R 12 W.

Chains

N 0°09'W. bet. secs.8 and 9.
Descend 27 ft. over NE. slope over rolling sandy land,
through cedar and pinion timber


21.00 Wash 20 lks. wide course E.

Ascend 147 ft. over S. slope.

36.00 Top of ridge slopes E.

Descend 60 ft. over N. slope.

40.00 Set an iron post 3 ft. long, 1 in. in diam. 8 ins. in the
ground to bedrock, supported by a mound of stone
2 ft. base 1½ ft. high for ¼ sec. cor., marked on
brass cap



1926

from which,

A cedar 8 ins. in diam. bears N83°E. 65 lks. dist.,
marked ¼ S9 BT.

A cedar 20 ins. in diam. bears S61°W. 70 lks. dist.,
marked ¼ S8 BT.

56.50 Wash 50 lks. wide course E.

Ascend 69 ft. over S. slope.

70.00 Top of spur slopes E.


Descend 31 ft. over N. slope.

78.50 Road bears E. and W.

79.90 Wash 20 lks. wide course E.

Ascend over S. slope.

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 26 ins. in
the ground for cor. of secs. 4, 5, 8, and 9., marked
on brass cap



1926

from which,

A cedar 4 ins. in diam. bears N45°E. 390 lks. dist.,
marked BT. only.

A cedar 12 ins. in diam. bears S77°E. 130 lks. dist.,
marked T34N., R12W., S9 BT.

A cedar 36 ins. in diam. bears S58°W. 185 lks. dist.,
marked T34N., R12W., S8 BT.

A cedar 10 ins. in diam. bears N74°W. 287 lks. dist.,
marked T34N., R12W., S5 BT.

Land, rolling.

Soil, sandy 2nd. and 3rd. rate.

Timber, cedar and pinion.

Undergrowth, sagebrush and cactae.

40.00

S 89°54'E. on a random line bet. secs. 4 and 9.

79.76

Set temp. ¼ sec. cor.

Intersect N. and S. line 5 lks. N. of the cor. of secs.
3, 4, 9, and 10.

Thence

Subdivision of T 34 N., R12 W.

Chains

- N 89°52'W: on true line bet. secs.4 and 9.
Ascend 46 ft. over SE. slope over rolling mountainous
land, through scattering cedar and pinion timber.
- 15.76 Top of spur slopes SE.
Descend 23 ft. over SW. slope.
- 19.26 Wash 20 lks. wide 2 ft. deep course S.
Ascend Over E. slope
- 20.76 Top of spur slopes S.
Descend over W. slope.
- 24.76 Wash 20 lks. wide 2 ft. deep course S.
Ascend over E. slope 69 ft.
- 29.76 Top of spur slopes SE.
Descend 119ft. over SW.slope.
- 38.96 Road bears NW. and SE.
- 39.88 Set an iron post 3 ft. long, 1 in. in diam.12 ins. in the
ground to bedrock, supported by a mound of stone
2 ft. base 1½ ft. high for ¼ sec. cor., marked on
brass cap

$$\frac{1}{4} \begin{array}{l} S 4 \\ S 9 \end{array}$$

1926

from which,

- A cedar 20 ins. in diam. bears N48°W.93 lks. dist.,
marked ¼ S4 BT.
- A cedar 6 ins. in diam. bears S11°W.75 lks. dist.,
marked ¼ S9 BT.
- 47.76 Top of ridge bears NE. and SW.
Descend 96 ft. over NW. slope.
- 55.66 Road bears NE. and SW.
- 58.76 Wash 20 lks. wide 2 ft. deep course NE.
Ascend 34 ft. over SE.slope.
- 69.76 Top of spur slopes SE.
Descend 29 ft. over SW.slope.
- 74.76 Foot of descent in N. edge of draw, thence along N. side
of draw over rolling land.
- 79.76 The cor. of secs. 4,5,8, and 9.

Land, rolling and mountainous.
Soil, sandy 3rd. and 4th. rate.
Timber, cedar and pinion.
Undergrowth, sagebrush and cactae.

- 40.00 N 0°00'W. on a random line bet. secs. 4 and 5.
Set temp. ¼ sec. cor.
- 38.53 Intersect N. bdy. of Tp. 28 lks. W. of the cor. of secs. 4,5,
32, and 33, hereinbefore described.
- Thence
S 0°01'E. on true line bet. secs. 4 and 5.
Ascend NE. slope over rolling mountainous land, through
scattering cedar and pinion timber
- 1.03 Top of ridge bears NW? and SE.
Descend 74 ft. over SW.slope.
- 20.03 Wash 20 lks. wide 2 ft. deep course SE.
Ascend over NE.slope.
- 38.53 Set an iron post 3 ft. long, 1 in. in diam.24 ins. in the
ground for ¼ sec. cor., marked on brass cap

$$\frac{1}{4} \begin{array}{l} S 5 \\ S 4 \end{array}$$

1926

Subdivision of T 34 N., R 12 W.

Chains

from which,
A pinion 6 ins. in diam. bears S42°E. 93 lks. dist.,
marked 1/4 S4 BT.

A cedar 12 ins. in diam. bears N82°W. 73 lks. dist.,
marked 1/4 S5 BT.

43.53 Top of spur slopes NE.
Descend 74 ft. over SE. slope.

54.93 Wash 50 lks. wide 2 ft. deep. course SE.
Ascend 34 ft. over NE. slope.


65.53 Top of spur slopes SE.
Descend 69 ft. over SE. slope.

76.03 Wash 10 lks. wide 2 ft. deep. course SE.
Ascend over NE. slope.

78.53 The cor. of secs. 4, 5, 8, and 9.

Land, rolling and mountainous.
Soil, sandy and stony. 3rd. and 4th. rate.
Timber, cedar and pinion.
Undergrowth, sagebrush.

From the cor. of secs. 5, 6, 31, and 32 on S. bdy. of Tp.
established by William H Thorn, U.S. Surveyor, in 1917
under Group 73 Arizona, which is an iron post 3 ins.
in diam. projecting 12 ins. above ground, firmly set
with brass cap marked



Witnessed by four pits, one, in each sec. NE., SE., SW., and
NW. of cor.

Thence


N 0°10'W. on true line bet. secs. 31 and 32.

Over rolling sandy prairie land, through scattering timber.

2.30 Wash course SW.

37.30 Road to Pigeon Springs, bears NE. and SW.

40.00 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in
the ground for 1/4 sec. cor. marked on brass cap



from which,

A cedar 4 ins. in diam. bears N58°E. 496 lks. dist.,
marked 1/4 S32 BT.

A cedar 10 ins. in diam. bears N42 1/2°W. 446 lks. dist.,
marked 1/4 S31 BT.

45.00 Top of low ridge bears E. and W.
Descend gradually over N. slope.

72.00 Wash, course NE.
Ascend slight SE. slope.

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 26 ins. in
the ground for cor. of secs. 29, 30, 31, and 32.,
marked on brass cap

Subdivision of T 34 N., R12 W.

Chains

T34N	R12W
S 30	S 29
S 31	S 32

1926

No bearing trees available.
Dig pits 18x18x12 ins. in each sec. 3 ft. dist.

Land, rolling.
Soil, sandy 2nd. and 3rd. rate.
Timber cedar and pinion.
Undergrowth, sagebrush and cactae.

- 40.00 N 89°59'E. on a random line bet. secs. 29 and 32.
- Set temp. $\frac{1}{4}$ sec. cor.
- 80.20 Intersect N. and S. line 2 lks N. of the cor. of secs. 28, 29, 32, and 33.
- Thence
- West on true line bet. secs. 29 and 32.
- Ascend E. slope over rolling sandy land thru scattering timber
- 5.20 Top of ridge bears NW. and SE.
- Descend gradually over SW. slope.
- 15.20 Draw, course NW.
- Ascend 29 ft. over NE. slope.
- 35.22 Top of spur slopes W.
- Descend 29 ft. along top of spur
- 40.10 Set an iron post 3 ft. long. 1 in. in diam. 4 ins. in the ground to bedrock., deposit stone 6x4x4 ins. marked with a cross (x) at the base, and raise a mound of stone 3 ft. base 2 $\frac{1}{2}$ ft. high around the post for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S 29
S 32

1926

- No bearing trees within limits
- 43.70 Wash 10 lks. wide 3 ft. deep course NW.
- Ascend over NE. slope.
- 52.20 Top of spur slopes NW.
- Descend over SW. slope.
- 54.20 Wash course NE.
- Ascend over SE. slope.
- 55.20 Old road bears NE. and SW.
- 56.20 Old ruins bears North about 10.00 chs. dist.
- 78.70 Road bears NW. and SE.
- 80.20 The cor. of secs. 29, 30, 31, and 32.

Land, rolling.
Soil sandy 3 rd. rate.
Timber cedar and pinion.
Undergrowth, sage and oak brush and cactae.

- 40.00 S 89°59'W. on a random line bet. secs. 30 and 31
- Set temp. $\frac{1}{4}$ sec. cor.
- 79.20 Intersect W. bdy. of T. 12 lks. S. of the cor. of secs. 25, 30, 31, and 36. hereinbefore described.
- Thence

Subdivision of T 34 N., R 12 W.

Chains

S 89°56'E. on true line bet. secs. 30 and 31
Ascend SW. slope over rolling sandy land, through cedar
and pinion timber and brush undergrowth.

10.00 Top of spur slopes SE.
Descend over E. slope.

26.00 Bottom of shallow draw course NE.
Ascend over NW. slope

39.20 Top of spur, slopes NW. Set an iron post 3 ft. long, 1 in.
in diam. 12 ins. in the ground to bedrock, supported
by a mound of stone 3 ft. base 2 ft. high for $\frac{1}{4}$
sec. cor. marked on brass cap

$\frac{1}{4}$ S 30
S 31
1926

from which,

A cedar 14 ins. in diam. bears N47°W. 13 lks. dist.,
marked $\frac{1}{4}$ S30 BT.

A cedar 8 ins. in diam. bears S14°W. 27 lks. dist.,
marked $\frac{1}{4}$ S31 BT.

Descend over NE. slope.

57.20 Draw 10 lks. wide course NE.
Ascend over NW. slope.

64.20 Top of low spur slopes NE.
Descend over SE. slope to

79.20 The cor. of secs. 29, 30, 31, and 32.

Land, rolling.
Soil, stony 2 nd. rate.
Timber, cedar and pinion.
Undergrowth, sage and buck brush and cactae.

N 0°10'W. bet. secs. 29 and 30.
Ascend slightly over SW. slope over rolling sandy land,
through scattering cedar and pinion timber

9.00 Shallow draw, course SE.

9.10 Road to "Hidden Lake" bears NW. and SE.

24.00 Top of spur slopes SE.
Descend gradually over NE. slope.

32.00 Wash 10 lks. wide course SE.

40.00 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the
ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S 30 | S 29
1926

from which,

A cedar 8 ins. in diam. bears S67°E. 339 lks. dist.,
marked $\frac{1}{4}$ S29 BT.

A cedar 48 ins. in diam. bears N30°W. 1033 lks. dist.,
marked $\frac{1}{4}$ S30 BT.

41.30 Wash 50 lks. wide course S60°E.
Ascend over SW. slope.

50.00 Top of ridge bears E. and W.
Descend over N. slope.

Subdivision of T 34 N., R 12 W.

Chains

- 61.60 Wash 10 lks. wide course SE.
Ascend gradually over SW. slope.
- 65.00 Top of spur slopes SE.
Descend over NE. slope.
- 72.40 Wash 15 lks. wide course SE.
Ascend gradually over SW. slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 26 ins. in
the ground for cor. of secs. 19, 20, 29, and 30.
marked on brass cap

T34N	R12W.
S 19	S 20
S 30	S 29

1926

from which,

- A cedar 24 ins. in diam. bears N29°E. 740 lks. dist.,
marked T34N., R12W., S20 BT.
- A cedar 4 ins. in diam. bears S73°E. 570 lks. dist.,
marked BT. only.
- A cedar 20 ins. in diam. bears S51°W. 391 lks. dist.,
marked T34N., R12W., S30 BT.
- A cedar 24 ins. in diam. bears N83°W. 470 lks. dist.,
marked T34N., R12W., S19 BT.

Land, rolling.
Soil, stony and sandy 2nd. and 3rd. rate.
Timber, cedar and pinion.
Undergrowth, sage and buck brush and cactae.

- 40.00 East on a random line bet. secs. 20 and 29.
Set temp. $\frac{1}{4}$ sec. cor.
- 80.24 Intersect N. and S. line 2 lks. S. of the cor. of secs.
20, 21, 28, and 29.
Thence
S 89°59'W. on true line bet. secs. 20 and 29.
Ascend 57 ft. over NE. slope over rolling stony land,
through scattering cedar and pinion timber.
- 6.00 Top of spur slopes SE.
Descend over SW. slope.
- 15.00 Bottom of shallow draw course NW.
Ascend over NE. slope.
- 18.00 Top of ridge bears NW. and SE.
Descend over SW. slope.
- 20.00 Bottom of shallow draw course SW.
Ascend over SE. slope.
- 40.12 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in
the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 20
S 29

1926

from which,

- A cedar 8 ins. in diam. bears N54°E. 130 lks. dist.,
marked $\frac{1}{4}$ S20 BT.
- A cedar 14 ins. in diam. bears S33°W. 82 lks. dist.,
marked $\frac{1}{4}$ S29 BT.

Subdivision of T 34 N., R 12 W.

Chains

- 49.00 Top of spur slopes S.
Descend 23 ft. over W. slope.
- 55.00 Wash 20 lks. wide 1 ft. deep course SW.
Ascend over SE. slope.
- 64.00 Top of spur slopes S.
Descend over W. slope.
- 78.00 Draw 20 lks. wide course SE.
Ascend gradually over NE. slope.
- 80.24 The cor. of secs.19,20,29,and 30.

Land, rolling.
Soil, stony 3rd. rate.
Timber, cedar and pinion.
Undergrowth, sagebrush and cactae.

- 40.00 N 89°56'W. on a random line bet. secs.19 and 30.
Set temp. 1/4 sec. cor.
- 78.89 Intersect W. bdy. of Tp. 8 lks. N. of the cor. of secs.19,24,
25, and 30., hereinbefore described.

Thence

- S 89°59'E. on true line bet. secs.19 and 30.
Descend gradually over SE. slope over rolling sandy land
through scattering cedar and pinion timber
- 12.65 Wash 10 lks. wide course SE.
Ascend over SW. slope.
- 20.00 Top of low spur slopes S.
Descend over E. slope.
- 32.90 Wash 10 lks. wide course SE.
Ascend over SW. slope.
- 37.20 Road bears NW. and SE.
- 38.89 Set an iron post 3 ft. long, 1 in. in diam. 20 ins. in
the ground to bedrock supported by a mound of
stone for 1/4 sec. cor., marked on brass cap

1/4 $\frac{S 19}{S 30}$

1926

from which,

- A cedar 16 ins. in diam. bears N64°E. 112 lks. dist.,,
marked 1/4 S19 BT.
- A cedar 16 ins. in diam. bears S82°E. 141 lks. dist.,,
marked 1/4 S30 BT.
- 51.00 Shallow draw course SE.
Ascend over SW. slope.
- 58.00 Top of low spur slopes SE.
Descend over NE. slope.
- 78.89 The cor. of secs.19,20,29, and 30.


Land, rolling.
Soil, sandy 3rd. rate.
Timber, cedar and pinion.
Undergrowth, sagebrush and cactae.

N 0°10'W. bet. secs. 19 and 20.
Descend NE. slope over rolling sandy land through
scattering cedar and pinion timber.

Subdivision of T 34 N., R 12 W.


Chains

- 2.20 Draw 50 lks. wide course SE.
Ascend over SW. slope.
- 30.00 Top of ridge bears NW. and E.
Descend 28 ft. over NE. slope.
- 38.98 Wash 75 lks. wide 3 ft. deep course SE.
Ascend over SW. slope
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 8 ins. in the
ground to bedrock, supported by a mound of stone
3 ft. base 2 ft. high for $\frac{1}{4}$ sec. cor. marked on
brass cap



from which,

- A cedar 6 ins. in diam. bears N88°E. 235 lks. dist.,
marked $\frac{1}{4}$ S20 T.
- A cedar 10 ins. in diam. bears N13°W. 204 lks. dist.,
marked * S19 BT
- 55.00 Top of low spur slopes SE.
Descend over NE. slope.
- 57.00 Ravine 20 lks. wide course SE.
Ascend over SW. slope. 23 ft.
- 67.00 Top of spur slopes SE.
Descend over NE. slope.
- 72.00 Head of ravine 10 lks. wide course SE.
Ascend over SW. slope.
- 75.00 Top of ridge bears E. and W.
Descend over N. slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 20 ins. in the
ground to bedrock, supported by a mound of stone
for cor. of secs. 17., 18., 19., and 20., marked on
brass cap



from which,

- A cedar 4 ins. in diam. bears N39°E. 25 lks. dist.,
marked BT. only.
- A cedar 12 ins. in diam. bears S66°E. 120 lks. dist.,
marked T34N., R12W., S20 BT.
- A cedar 14 ins. in diam. bears S55°W. 77 lks. dist.,
marked T34N., R12 W., S 19. BT.
- A cedar 12 ins. in diam. bears N31°W. 89 lks. dist.,
marked T34N., R12W., S18 BT.

Land, rolling.
Soil, sandy and stony 3 rd. and 4th. rate.
Timber, cedar and pinion.
Undergrowth, sagebrush and caetae.

Subdivision of T 34 N., R 12 W.

Chains N 89°59'E. on a random line bet. secs. 17 and 20.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.24 Intersect N. and S. line 5 lks. S. of the cor. of secs.
 16, 17, 20, and 21.
 Thence
 S 89°57'W. on true line bet. secs. 17 and 20.
 Descend 23 ft. over NW. slope over rolling sandy land,
 through cedar and pinion timber.
 5.00 Wash 20 lks. wide 2 ft. deep course NE.
 Ascend 57 ft. over E. and NE. slope.
 22.00 Top of spur slopes NE.
 Descend over NW. slope.
 26.00 Wash 20 lks. wide 2 ft. deep course NE.
 Ascend over SE. slope.
 29.00 Top of spur slopes NE.
 Descend over NW. slope.
 34.00 Wash 20 lks. wide 1 ft. deep course NE.
 Ascend over SE. slope.
 40.12 Set an iron post 3 ft. long, 1 in. in diam. 20 ins. in the
 ground to bedrock, supported by a mound of stone
 for $\frac{1}{4}$ sec. cor. marked on brass cap

S 17
 $\frac{1}{4}$ S 20
 1926

from which,

A cedar 20 ins. in diam. bears N20°W. 126 lks. dist.,
 marked $\frac{1}{4}$ S17 BT.
 A cedar 16 ins. in diam. bears S5°E. 91 lks. dist.,
 marked $\frac{1}{4}$ S20 BT.

45.00 Top of spur slopes NE.
 Descend over NW. slope.
 50.00 Wash 20 lks. wide 1 ft. deep course NE.
 Ascend over SE. slope.
 58.00 Top of spur slopes N.
 Descend over W. slope.
 62.00 Wash 20 lks. wide 1 ft. deep course NE.
 Ascend over SE. slope.
 75.00 Top of ridge bears SE and W.; continue along top of ridge.
 80.24 The cor. of secs. 17, 18, 19, and 20.

Land, rolling.
 Soil, sandy and stony 3rd. and 4th. rate.
 Timber, cedar and pinion.
 Undergrowth, sagebrush and cactae.

N. 89°59'W. on a random line bet. secs. 18 and 19.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 78.75 Intersect the W. bdy. of Tp. 11 lks. N. of the cor. of secs.
 13, 18, 19, and 24., hereinbefore described.
 Thence
 N 89°56'E. on true line bet. secs. 18 and 19.
 Descend SE. slope over rolling sandy land, through cedar
 and pinion timber.
 5.00 Shallow draw course SE.
 Ascend over SW. slope.
 7.00 Top of spur slopes SE.
 Descend over NE. slope.
 25.00 Shallow draw 10 lks. wide, course SE.
 Ascend over SW. slope.
 38.75 Set an iron post 3 ft. long, 1 in. in diam. 12 ins. in the
 ground to bedrock, supported by a mound of stone 3 ft.
 base 2 ft. high for $\frac{1}{4}$ sec. cor., marked on brass cap

Subdivision of T 34 N., R 12 W.

Chains

1/4 S 18
S 19

1926

from which,

A cedar 12 ins. in diam. bears N25°E.136 lks. dist.,
marked 1/4 S18 BT.

A cedar 14 ins.in diam. bears S76°W.270 lks. dist.,
marked 1/4 S19 BT.

58.75 Top of ridge bears NW.and SE.,thence along top of ridge.
78.75 The cor. of secs.17,18,19,and 20.

Land,rolling.
Soil,sandy and stony 3rd. and 4th.rate.
Timber, cedar and pinion.
Undergrowth,sagebrush and cactae.

N 0°10'W. bet. secs.17 and 18.
Descend slightly 23 ft.over NE. slope over rolling sandy
land,through scattering cedar and pinion timber.

9.99 Wash 50 lks. wide 2 ft. deep course NE.

20.00 Ascend 34 ft. over SE. slope
Top of spur slopes SE.

24.50 Descend over NE. slope.

Shallow draw 20 lks. wide course SE.
Ascend 23 ft. over SW. slope.

35.00 Top of spur slopes SE.
Descend over NE. slope.

40.00 Set an iron post 3 ft. long, 1 in. in diam.26 ins. in the
ground for 1/4 sec. cor.,marked on brass cap

1/4 S 18 | S 17

1926

from which,

A cedar 6 ins.in diam. bears S55°E.51 lks. dist.,
marked 1/4 S17 BT.

A cedar 24 ins. in diam. bears S76°W.32 lks. dist.,
marked 1/4 S18 BT.

40.30 Shallow ravine 10 lks. wide course SE.
Ascend over SW.slope.

50.00 Top of ridge bears E. and W.
Descend 97 ft. over N. slope.

71.90 Wash 75 lks. wide course NE.
Ascend over SE. slope. 62 ft. to

80.00 Set an iron post 3 ft. long, 2 ins. in diam.15 ins. in
the ground to bedrock,supported by a mound of
stone 3 ft. base 1 1/2 ft..high for cor. of secs.7,8,
17,and 18.,marked on brass cap

T34N | R12W
S 7 | S 8
S 18 | S 17

1926

Subdivision of T 34 N., R 12 W.

Chains

from which

- A cedar 4 ins. in diam. bears N56°E.33 lks. dist.,
marked BT. only.
- A pinion 12 ins. in diam. bears S68°E.85 lks. dist.,
marked T34N.,R12W.,S17 BT.
- A cedar 10 ins. in diam. bears S10°W.64 lks. dist.,
marked T34N.,R12W.,S18 BT.
- A cedar 16 ins. in diam. bears N43°W.95 lks. dist.,
marked T34N.,R12W.,S7 BT.

Land, rolling.

Soil, sandy and stony 3 rd. and 4th. rate.

Timber, cedar and pinion.

Undergrowth, sagebrush and cactae.

- 40.00 N 89°57'E. on a random line bet. secs. 8 and 17.
Set temp. $\frac{1}{4}$ sec. cor.
- 80.16 Intersect N. and S. line 8 lks. S. of the cor. of secs. 8, 9,
16, and 17

Thence

- S 89°54'W. on true line bet. secs. 8 and 17.
Ascend SE slope of ridge over rolling stony land, through
scattering cedar and pinion timber.
- 30.16 Top of ridge bears NE. and SW.
Descend 23 ft. over NW. slope.
- 37.66 Wash 50 lks. wide 1 ft. deep course NE.
Ascend 14 ft. over SE. slope.
- 40.08 Set an iron post 3 ft. long, 1 in. in diam. 22 ins. in the
ground to bedrock, supported by a mound of stone
2 ft. base $1\frac{1}{2}$ ft. high for $\frac{1}{4}$ sec. cor., marked
on brass cap

$$\frac{1}{4} \frac{S 8}{S 17}$$

1926

from which,

- A cedar 18 ins. in diam. bears N11°E.360 lks. dist.,
marked $\frac{1}{4}$ S8 BT.
- A cedar 20 ins. in diam. bears S15°E.278 lks. dist.,
marked $\frac{1}{4}$ S17 BT.
- 42.16 Top of spur, slopes N.
Descend 63 ft. over W. slope.
- 55.16 Wash 75 lks. wide course NE.
Ascend 81 ft. over E. slope.
- 76.16 Top of spur slopes SE.
Descend over SW. slope.
- 78.16 Shallow draw 10 lks. wide course S.
Ascend over E. slope.
- 80.16 The cor. of secs. 7, 8, 17, and 18.

Land, rolling.

Soil, sandy and stony 2nd. and 3rd. rate.

Timber, cedar and pinion.

Undergrowth, sagebrush and cactae.

- 40.00 S 89°56'W. on a random line bet. secs. 7 and 18.
Set temp. $\frac{1}{4}$ sec. cor.

Subdivision of T 34 N., R 12 W.

Chains	
78.52	Intersect the W.bdy.of Tp.10 lks. N.of the cor. of secs. 7,12,13,and 18.,hereinbefore described.
	Thence
	N 89°52'E. on true line bet. secs. 7 and 18.
	Descend SE.slope over rolling sandy land,through cedar and pinion timber.
4.52	Draw 20 lks. wide 1 ft. deep course SE.
	Ascend over SW. slope.
8.52	Top of spur slopes SE.
	Descend over NE. slope.
13.82	Draw 10 lks. wide course SW.
	Ascend over NW. slope.
23.52	Top of spur slopes S.
	Descend 29 ft. over E. slope.
30.02	Shallow draw 10 lks. wide course S.
	Ascend over W. slope.
32.52	Top of low spur slopes S.
	Descend 23 ft. over E.slope.
38.52	Set an iron post 3 ft. long, 1 in. in diam.26 ins. in the ground for $\frac{1}{4}$ sec. cor.marked on brass cap
	$\frac{1}{4} \frac{S 7}{S 18}$
	1926
	from which,
	A cedar 4 ins. in diam. bears N14°W.45 lks. dist. , marked BT.only.
	A cedar 4 ins. in diam. bears S74°E.128 lks. dist., marked BT.only.
41.02	Head of draw 20 lks. wide 1 ft. deep course SW.
	Ascend over NW. slope.23 ft.
46.52	Top of spur slopes SE.
	Descend over NE. slope.
59.52	Draw course NE.
	Ascend over NW. slope.
61.02	Top of spur slopes NE.
	Descend 57 ft. over NE. slope.
66.92	Wash 20 lks. wide 2 ft. deep course SE.
	Ascend 63 ft. over SW.slope to
78.52	The cor. of secs.7,8,17,and 18.
	<p>Land,rolling. Soil,sandy and stony 3 rd. and 4 th. rate. Timber,cedar and pinion. Undergrowth, sagebrush and cactae.</p>
	N 0°10'W. bet. secs. 7 and 8.
	Ascend over SW. slope over stony land,through scattering cedar and pinion timber.
3.00	Top of spur slopes SE.
	Descend 29 ft. over NE. slope.
8.10	Draw 10 lks. wide course E.
	Ascend 81 ft. over S.slope.
19.00	Top of spur slopes SE.
	Descend 40 ft. over NE. slope.
24.70	Shallow ravine 10 lks. wide course SE.
	Ascend 23 ft. over SW.slope.
39.70	Top of ridge bears NE. and SW.
	Descend 23 ft. over NW.slope.

Subdivision of T 34 N., R 12 W.

Chains

40.00 Set an iron post 3 ft. long, 1 in. in diam. 24 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

\uparrow
 S 7 | S 8
 |
 1926

from which,

A cedar 12 ins. in diam. bears $S23\frac{1}{2}^{\circ}E.$ 110 lks. dist., marked $\frac{1}{4}$ S8 BT.

A cedar 5 ins. in diam. bears $S49^{\circ}W.$ 241 lks. dist., marked $\frac{1}{4}$ S7 BT.

42.00 Old road bears NE. and SW.

43.40 Wash 50 lks. wide 2 ft. deep course NE.
Ascend over SE. slope.

51.00 Top of low spur slopes SE.

Descend over NE. slope.

55.60 Shallow draw 20 lks. wide course SE.

Ascend 82 ft. over SW. slope.

68.10 Top of ridge, bears E. and SW.

Descend 23 ft. over N. slope. to

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 24 ins. in the ground for cor. of secs. 5, 6, 7, and 8., marked on brass cap

T34N | R12W
 S 6 | S 5

 S 7 | S 8
 1926

from which,

A cedar 20 ins. in diam. bears $N63^{\circ}E.$ 230 lks. dist., marked T34N., R12W., S5 BT.

A cedar 6 ins. in diam. bears $S64^{\circ}E.$ 107 lks. dist., marked T34N., R12W., S8 BT.

A cedar 16 ins. in diam. bears $S25^{\circ}W.$ 67 lks. dist., marked T34N., R12W., S7 BT.

A cedar 12 ins. in diam. bears $N82^{\circ}W.$ 85 lks. dist., marked T34N., R12W., S6 BT.

Land, rolling.

Soil, sandy and stony 3 rd. and 4 th. rate.

Timber cedar and pinion.

Undergrowth, sagebrush and cactae.

40.00 N $89^{\circ}54'E.$ on a random line bet. secs. 5 and 8.

80.24 Set twmp. $\frac{1}{4}$ sec. cor.

Intersect N. and S. line 10 lks. N. of the cor. of secs. 4, 5, 8, and 9.

Thence

S $89^{\circ}58'W.$ on true line bet. secs. 5 and 8.

Ascend 29 ft. over E. slope over rolling sandy land, through cedar and pinion timber.

17.00 Top of spur slopes NE.

Continue slight ascent along N. slope.

25.00 Descend over NW. slope.

30.50 Wash 20 lks. wide 1 ft. deep course NE.

Subdivision of T 34 N., R 12 W.

Chains

40.12 Ascend 52 ft. over SE.slope.
Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ $\frac{S 5}{S 8}$

1926

from which,

A pinion 8 ins. in diam. bears N8°W. 31 lks. dist., marked $\frac{1}{4}$ S5 BT.
A cedar 20 ins. in diam. bears S26°E. 34 lks. dist., marked $\frac{1}{4}$ S8 BT.

55.00 Top of spur, slopes NE.
Descend over NW. slope.

69.00 Shallow draw 20 lks. wide course NE.
Ascend 29 ft. over SE.slope.

80.24 The cor. of secs. 5, 6, 7, and 8.

Land, rolling.
Soil, sandy and stony 3rd. and 4th. rate.
Timber, cedar and pinion.
Undergrowth, sagebrush and cactae.

40.00 S 89°52'W. on a random line bet. secs. 6 and 7.
Set temp. $\frac{1}{4}$ sec. cor.

78.26 Intersect the W. bdy. of Tp. 10 lks. S. of the cor. of secs. 1, 6, 7, and 12., hereinbefore described.

Thence
N 89°56'E. on true line bet. secs. 6 and 7.
Ascend SW. slope over rolling sandy land, through cedar and pinion timber.

3.26 Top of ridge bears NW. and SE.
Descend over NE. slope.

26.26 Shallow ravine 20 lks. wide course NE.
Ascend over NW. slope.

38.26 Top of low spur slopes NE.; Set an iron post 3 ft. long 1 in. in diam. 20 ins. in the ground to bedrock, supported by a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ $\frac{S 6}{S 7}$

1926

from which,

A cedar 6 ins. in diam. bears N53°W. 71 lks. dist., marked $\frac{1}{4}$ S6 BT.
A cedar 12 ins. in diam. bears S27°W. 34 lks. dist., marked $\frac{1}{4}$ S7 BT.

Descend over SE. slope.

46.16 Shallow draw, course NE.
Ascend over NW. slope.

55.66 Top of spur slopes NE.
Descend over SE. slope.

64.36 Draw 10 lks. wide 1 ft. deep, course NE.
Ascend over NW. slope.

66.26 Top of spur slopes NE.
Descend over SE. slope.

73.76 Draw 20 lks. wide course NE.


Subdivision of T 34 N., R 12 W.

Chains

78.26 Ascend over NW. slope.
The cor. of secs. 5, 6, 7, and 8.

Land, rolling.
Soil, sandy and stony 3rd. and 4th. rate.
Timber, cedar and pinion.
Undergrowth, sagebrush and cactae.

40.00 N 0°10'W. on a random line bet. secs. 5 and 6.
Set temp. $\frac{1}{4}$ sec. cor.
78.42 Intersect the N. bdy. of Tp. 16 lks. W. of the cor. of secs.
5, 6, 31, and 32. hereinbefore described.
Thence
S 0°03'E. on true line bet. secs. 5 and 6.
Ascend 27 ft. over NE. slope over rolling sandy land;
through cedar and pinion timber
4.42 Top of ridge bears NE. and SW.
Descend 34 ft. over SE. slope.
23.42 Draw 15 lks. wide 1 ft. deep course SE.
Ascend 23 ft. over NE. slope.
38.42 Set an iron post 3 ft. long, 1 in. in diam. 18 ins. in
the ground to bedrock, supported by a mound of
stone 3 ft. base $1\frac{1}{2}$ ft. high for $\frac{1}{4}$ sec. cor.,
marked on brass cap.



from which,

A cedar 20 ins. in diam. bears N73°E. 56 lks. dist.,
marked $\frac{1}{4}$ S5 BT.
A cedar 10 ins. in diam. bears N60°W. 38 lks. dist.,
marked $\frac{1}{4}$ S6 BT.
Note: This cor. is on top of ridge bears NE. and NW.
Descend 68 ft. over SE. slope.
56.72 Shallow draw 20 lks. wide course SE.
Ascend over NE. slope.
60.42 Top of low spur slopes E.
Descend over S. slope.
64.12 Wash 50 lks. wide 4 ft. deep course NE.
Ascend over NW. slope.
68.42 Top of low spur slopes NE.
Descend over SE. slope.
72.42 Shallow draw 20 lks. wide course NE.
Ascend over NW. slope.
78.42 The cor. of secs. 5, 6, 7, and 8.

Land, rolling.
Soil, sandy and stony 3rd. and 4th. rate.
Timber, cedar and pinion.
Undergrowth, sagebrush, and cactae.

Boundaries of T 34 N., R 12 W.

Latitudes, Departures, and closing errors.

Line designated	True bearing	Dist.	Latitudes		Departures	
			N	S	E	W
S.bdy. of T34N., R12W	S89°59'W	479.61		.15		479.61
W.bdy. of T34N., R12W.	North	478.65	478.65			
N.bdy. of T34N., R12W.	East	478.30			478.30	
E.bdy. of T34N., R12W	S0°07'E	479.00		479.00	.96	
Convergency-----	-----	-----			.53	
Totals-----	-----	-----	478.65	479.15	479.79	479.61
				478.65	479.61	
			Error in Lat.----- 0.50		0.18	
			Error in Dep.-----		0.18	

GENERAL DESCRIPTION

The land comprising this township is a rolling plateau ranging in elevation from 5600 to 6000 ft., the highest point in the township being in the vicinity of the NE.cor. on Poverty Mountain.

The drainage is mostly into the Parashont Wash, which heads about eight miles south of the south boundary of the township and courses northerly through the township to near the northwest cor. of section ten thence in an easterly direction, crossing out of the township a short distance S. of the 1/4 sec. cor. of secs. 7 and 12 on the E.bdy. In the extreme southeast corner of the township the drainage is to the southeast.

The soil of the narrow valley along the Parashont Wash and of the bottom land along many of the larger draws is of a sandy loam formation about 24 ins. in depth, underlaid by a stony formation and can nearly all be classed as 2 nd. rate in character. The soil over the remainder of the township is a poor sandy and stony clay loam formation, ranging in character from 3 rd. to 4 th. rate.

The entire township is timbered with cedar and pinion, the trees ranging in size from 4 to 36 ins. in diameter, valuable for fuel and fence posts.

The township is watered by an intermittent stream which flows for a part of the year in the Parashont Wash and by water caught in an artificial tank in section 10, known locally as "Brush Pockets."; There are no springs or other supply of living water in the township.

Thomas Heckathorn, who resides in a small house with cellar and corral, located in section 10 is the only settler residing in the township at the present time.

The township is situated with respect to lines of communication as follows; The main travelled road from

St. George Utah to a place called Wildcat, crosses through the township from north to south in a southeasterly direction. The southern and southwestern portions of the township are reached by the road leading to Pigeon Canyon and Hidden Lake which follows the Parashont Wash through the township.

The land is best adapted to the grazing of stock, which is the occupation of the settler in sec. 10.

FINAL FIELD TEST OF INSTRUMENT

July 7, 1926, Set up instrument on the meridian established June 10, 1926, near the cor. of secs. 20, 21, 28, and 29, on which the preliminary tests were made, and at 10^h00^m a.m., app. time, set off 36°19' N. on the lat. arc., 22°38' N. on the decl. arc and determine a meridian with the solar which agrees with the true meridian

At 12^h00^m app. noon with the lat. arc unchanged, observe the sun on the meridian; the resulting reading of the declination arc is 22°37' N. which agrees with the computed declination of the sun.

At 3^h00^m p.m., app. time with the latitude arc unchanged, set off 22°36 $\frac{1}{2}$ ' N. on the decl. arc and determine a meridian with the solar which agrees with the true meridian.

As all of the observations taken during the usual hours of solar work agree within 1' of the true meridian conclude that the adjustments of the instrument have been maintained.

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Benjamin J Kinsey, U. S. Surveyor, hereby certify upon honor that, in pursuance
District Cadastral Engineer
of special instructions received from the U. S. ~~Surveyor General~~ Surveyor General, for Group 137 Arizona
bearing date of the fourth day of May, 19 26, I have well, faithfully, and truly
in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instruc-
tions, and the laws of the United States, surveyed all those parts or portions of the East, West,
and North, boundaries and Subdivision lines of Township 34 North.,
Range 12 West

of the Gila and Salt
River Base and Meridian, in the State of Arizona, which are represented in
and by diagram on page 1 hereof
the foregoing field notes as having been executed by me, and under my direction; and that all the corners of
said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instruc-
District Cadastral Engineer
tions, and the special written instructions of the U. S. ~~Surveyor General~~ Surveyor General, for Group 137, Arizona
and in the specific manner described in the field notes, and that the foregoing are the original field notes of
such survey.

Place: Phoenix, Arizona Benjamin J. Kinsey
Date: July, 23, 1927. U. S. Surveyor.
APPROVAL.

OFFICE OF THE U.S. SUPERVISOR OF SURVEYS.

Denver, Colo., July 29, 1927.

The foregoing field notes of the survey of the
EAST, WEST and NORTH Boundaries
and
Subdivision Lines of
Township 34 North, Range 12 West

of the Gila & Salt River Base & Meridian, in the State of Arizona
executed by Benjamin J. Kinsey, U.S. Surveyor
under his special instructions dated May 4, 1926 for Group 137 Arizona, having been
critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys
they describe, are hereby approved.

Wm. H. Johnson
U. S. Supervisor of Surveys.

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~
~~has been correctly copied from the original notes on file in this office.~~