

BOOK 3810

FIELD NOTES

OF THE RESURVEY OF

Third Standard Parallel North thru Range 1 East

Gila and Salt River Meridian thru Township 13 North

East Part of East Boundary of Township 13 North, Range 1 East

West Part of the Subdivision lines of Township 13 N., Range 1 E.

AND OF THE SURVEY OF

Independence, 2nd Independence, 3rd Independence, English Coin,

Australian Mine, Big Four, Keystone, Buckeye, Champagne and

Stambo King lode mining claims, in Secs. 4, 9 & 10, T. 13 N., R. 1 E.

and Part (completion) of the Subdivision lines of

Township 13 North, Range 1 East

Of the Gila and Salt River Base and Meridian,

the State of Arizona

EXECUTED BY

Benjamin J. Kinsey

U.S. Surveyor

in the capacity of U. S. Surveyor, under Special Instructions dated October 28, 1925,

U.S. District Cadastral Engineer

appointed by the United States Surveyor General to govern surveys included in

Order No. 1316, Arizona, which were approved by the Commissioner of the General Land

Office, November 5, 1925, and Assignment Instructions dated April 21, 1925.

Resurvey and Survey commenced October 15, 1925.

Resurvey and Survey completed December 1, 1925.


1A


INDEPENDENCE - pages 26 & 27
 2ND INDEPENDENCE - pages 28 & 29
 3RD INDEPENDENCE - pages 30 & 31
 ENGLISH COIN - pages 32 & 33
 BIG FOUR - page 34
 AUSTRALIAN MINE - pages 35 & 36

BUCKEYE -- pages 37 & 38
 KEYSTONE -- page 39
 CHAMPAGNE - page 40
 STAMBO KING - pages 41 & 42.


Copies of Location Notices of above claims on pages 87 to 110 hereof.

INDEX DIAGRAM.

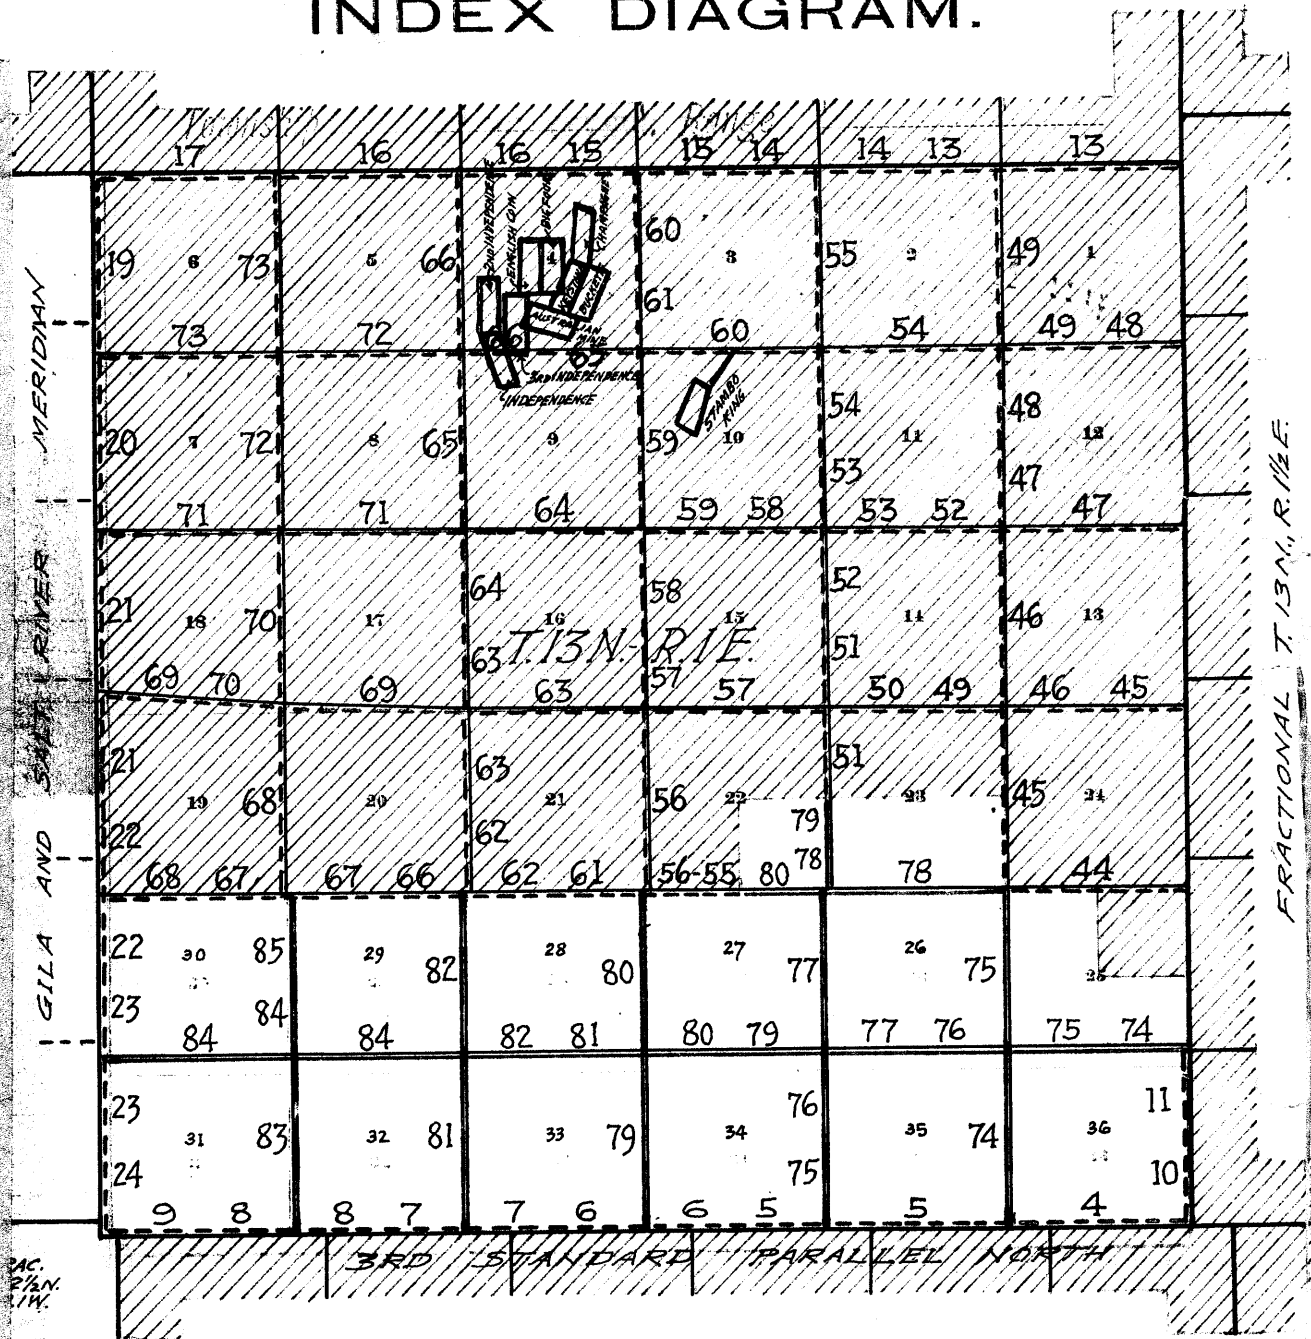

- Surveyed under this group.
- Resurveyed under this group.
- Accepted surveys, retracements or resurveys.
- Unsurveyed.
-  Areas surveyed as per accepted plats on file.

Book "A"
 GROUP 136 - ARIZONA
 TOWNSHIP 13 NORTH, RANGE 1 EAST.
 DATE DIAGRAM
 1925

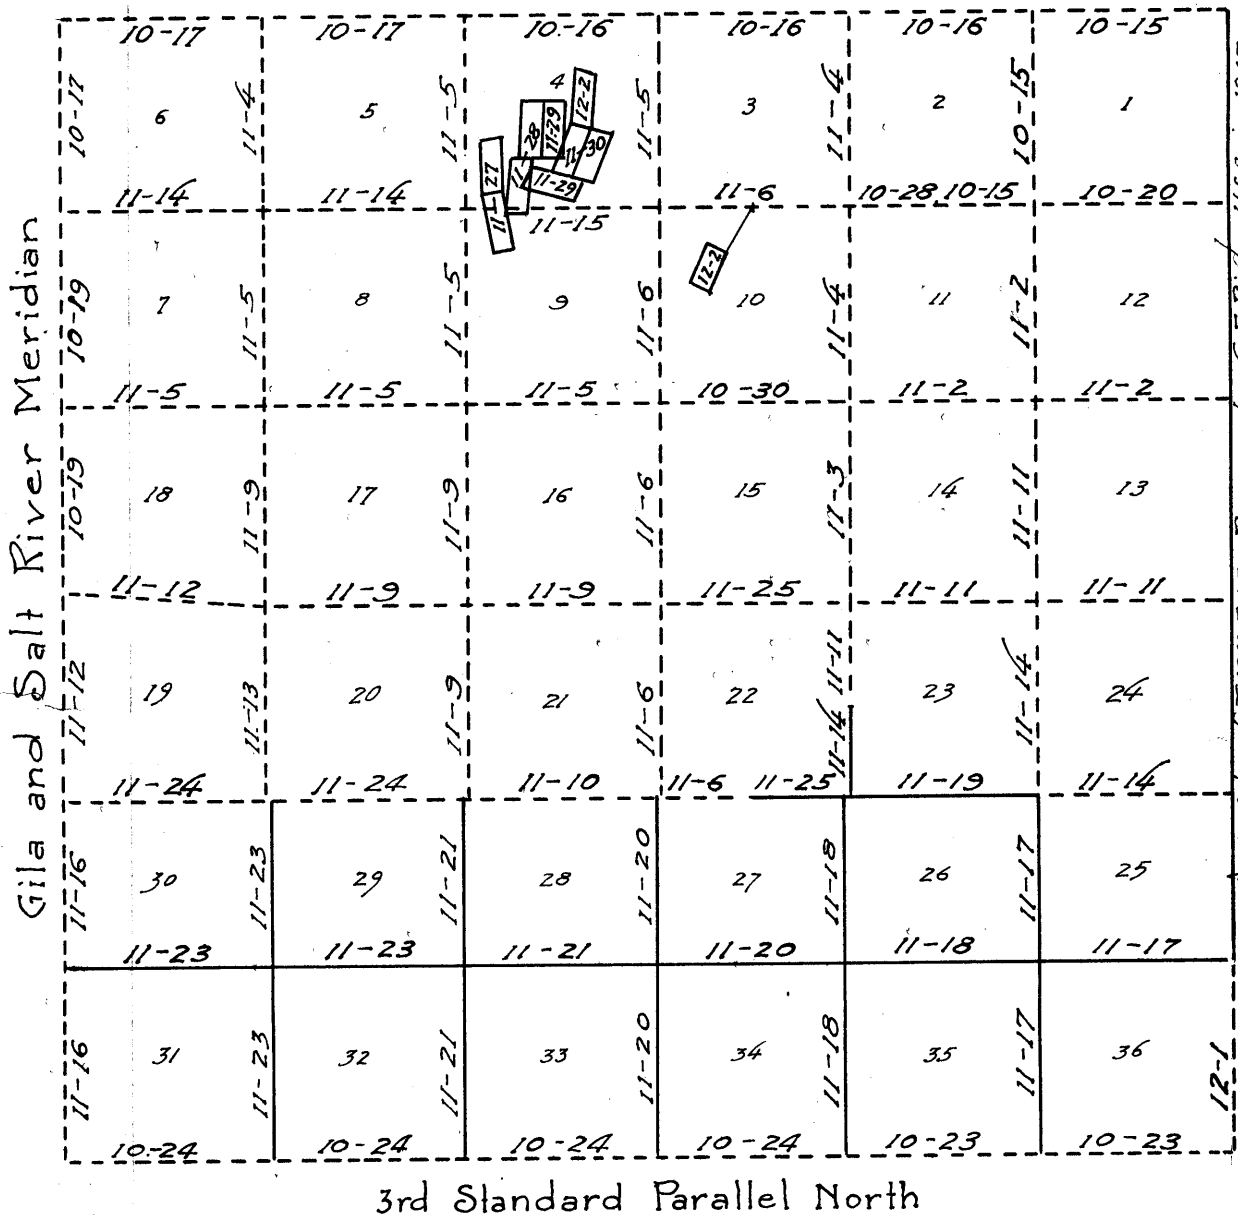

E. Boy of T. 13 N., R. 1 E. Resurveyed by G. F. Rigby U.S.S. in 1917.
 S. 1/2 of E. boy of Sec. 25 Dgr. 1.
 Retraced in 1923 by B. J. Kinsey & J. White and Com. for Trac. T. 13 N., R. 1 E. Established thereon

_____ Surveyed under this group, on dates shown thereon } by Benjamin J. Kinsey U.S. Surveyor
 - - - - - Resurveyed under this group on dates shown thereon }
 _____ Accepted surveys or resurveys

The resurveys and surveys herein described were executed by Benjamin J. Kinsey, U.S. Surveyor, on dates shown on diagram on page 1 hereof, using Buff solar transit No. 9940, with U-shaped standards, $4\frac{1}{2}$ inch horizontal circle, 4 inch vertical circle and improved Smith solar attachment; all azimuth determinations are accomplished with the solar attachment except the special observations upon Polaris upon which to test the solar apparatus as stated in the field notes.

October, 13, 1925, at my station near the $\frac{1}{2}$ sec. cor. of secs. 11 and 14, T. 13 N., R. 1 E., Gila and Salt River Base and Meridian, ^{ARIZONA} in latitude $34^{\circ}32'N.$, as determined by the mean of altitude obsns. upon the sun as herein-after described, and longitude $112^{\circ}13' W.$, examine the adjustments of the instrument and find no existing errors; then to test the workings of the solar apparatus proceed as follows:

At 6h 00m.p.m., l.m.t., observe Polaris at Eastern Elongation, making four observations, two each with the solar in direct and reversed positions and marking the mean point in the line thus determined by a tack set in a stake about 5 chs. dist.

Azimuth of Polaris at eastern elongation : $1^{\circ}19'47''$.

Oct, 14, lay off the azimuth of Polaris, $11^{\circ}20''$ to the west and mark the meridian thus determined by setting a tack in top of stake about 5 chs. dist.

At 9h 00m., a.m., app.t., set off $34^{\circ}32'N.$, on the latitude arc, $8^{\circ}06'S.$, on decl. arc and determine a meridian with the solar which is found to agree with the true meridian.

At app. noon, with lat. arc unchanged, observe the sun on the meridian; the resultant reading of the decl. arc is $8^{\circ}9'S.$, which agrees with the computed declination of the sun.

At 3h 00m., p.m., app. t., with the lat. arc unchanged, set off $8^{\circ}12'S.$, on the decl. arc and determine a meridian with the solar which is found to agree with the true meridian.

As all of the observations made during the usual hours of solar work agree within 1' of the true meridian, conclude that the adjustments of the instrument are satisfactory.

Oct., 18, at same station as above, in approximate latitude $34^{\circ}32'N.$, and longitude $112^{\circ}13'W.$, make a meridian observation of the sun for time and latitude, observing simultaneously the altitude of the suns lower limb and the transit of the suns west limb, reversing the telescope and observing simultaneously the altitude of the suns upper limb and the transit of the suns east limb.

Mean observed altitude:	$45^{\circ}30'30''$
Reduced latitude :	$34^{\circ}32'06''$
Mean watch time of obsn. :	11h 58m 15s.
Watch fast of local mean time:	12m 59s.

Unless otherwise specified all measurements are made with a Lufkin steel tape 5 chs. in length, compared with a Lufkin standard and found correct. The measurements are made on the slope, the vertical angle determined and the slope measurements properly reduced to true horizontal distance.

The 3rd Std.Par.N. thru E. $\frac{1}{2}$ of R.1 W. and thru Rs.1, 2, 3, 4, and 5 E. was surveyed by C.B. Foster, U.S.D.S. in 1873 prior to the survey of the G. & S.R. Meridian thru T.12 N., and S. 2 miles in T.13 N. The Parallel was surveyed due East from the std. cor. of secs. 33 & 34, T.13 N., R.1 W., (established in 1871) establishing all std. $\frac{1}{4}$ sec., sec. and Tp. cors. at regulation intervals.

The survey of the G. & S.R. Meridian due North thru T.12 N., and due South on the S. two miles in T.13 N., executed by J.B. McLaughlin, U.S.D.S. in 1883 intersected the 3rd Std. Par. N. at 2.49 chs. E. and 2.18 chs. W., respectively, from the Foster Std. Meridian cor. of Ts.12 & 13 N., Rs.1 E. & 1 W., at which points Tp. closing cors. were established.

In 1913, under instructions for Group No. 20, Ariz., Sidney E. Blout, U.S.S. made an independent resurvey of the G. & S.R. Meridian due North thru T.12 N. to a point on the original position of the 3rd Std. Par. N., 4.81 chs. E. of the Foster Std. Meridian Cor., at which point he reestablished a closing cor. referring to Frac. T.12 $\frac{1}{2}$ N., R.1 W. (NE. cor.) and reconstructed the Std. Mer. Cor. and the C.C. of Ts.13 N., Rs.1 E. & 1 W., by setting brass-capped iron posts at the original positions of said cors.

Surveyor Blout at about the same time, and under same group instructions, made an independent resurvey of the 3rd Std. Par. N. due West thru R.1 E. from the std. cor. of Ts.13 N., Rs.1 & 2 E. (reconstructed in original position in 1910 by J.F. Hesse, U.S.D.S.) and intersected the resurveyed G. & S.R. Meridian at 4.20 chs. S. of the reestablished C.C. of Frac. T.12 $\frac{1}{2}$ N., R.1 W., at which point of intersection he established std. C.C. of Ts.12 & 13 N., R.1 E.

In 1917, G.F. Rigby, U.S.S. reestablished the std. cor. of Ts.13 N., Rs.1 & 2 E. at 16.05 chs. W. of the original std. cor. of said tps., changed said original std. tp. cor. to an angle point and resurveyed the 3rd Std. Par. N. on the E. $\frac{1}{2}$ of S. bdy. of sec. 36, T.13 N., R.1 E.

No other resurvey or retracement of the 3rd Std. Par. N. in R.1 E. is of record, however, the std. cor. of Ts.13 N., Rs.1 & 2 E., reestablished by G.F. Rigby, U.S.S. in 1917 was altered in 1923 to refer to T.13 N., R.1 E. and Frac. T.13 N., R.1 $\frac{1}{2}$ E. by Ty White, U.S.T. under instructions for Group No. 129 Arizona.

The following notes describe a resurvey of the 3rd Std. Par. N. thru R.1 E., preserving the alinement between all of the previously reestablished std. $\frac{1}{4}$ sec. and sec. cors., between the std. cor. of T.13 N., R.1 E. & Frac. T.13 N., R.1 $\frac{1}{2}$ E. and the C.C. of Ts.12 & 13 N., R.1 E.

Frac. T.12 $\frac{1}{2}$ N., R.1 W., the E. $\frac{1}{2}$ of T.13 N., R.1 W., and the S. two tiers of secs. of T.13 N., R.1 E. being unsurveyed land, the Parallel W. of the C.C. of Ts.12 & 13 N., R.1 E., and the Meridian N. of same CC. is subject to rectification by an independent resurvey, therefore this resurvey extends the Parallel due West from said C.C. as part of S. bdy. of sec. 31, T.13 N., R.1 E., to a point where the G. & S.R. Meridian independently resurveyed due South from the original cor. of secs. 13, 18, 19 & 24, Ts.13 N., Rs.1 E. & 1 W., as hereinafter described, intersects the Parallel so extended, at which point of intersection the std. cor. of T.13 N., R.1 E. only (SW. cor.) is reestablished in this resurvey.

Retracement for Resurvey.

From the std. cor. of T.13 N., R.1 E. & Frac. T.13 N., R.1 $\frac{1}{2}$ E., West, on random line, setting temp. std. $\frac{1}{4}$ sec. and sec. cors. alternately, at intervals of 40.00 chs.

Intersect all of the previously reestablished std. $\frac{1}{4}$ sec. and sec. cors., and the original closing cors. of secs. in T.12 N., R.1 E. in substantial agreement with the recorded distances between same.

478.28 intersect the C.C. of Ts.12 & 13 N., R.1 E.

Continue line and measurement.

485.53 intersect random G. & S.R. Meridian surveyed due South from original cor. of secs. 13, 18, 19 & 24, Ts.13 N., Rs.1 E.

4 Resurvey of the 3rd Standard Parallel North, thru Range 1 East

chains	and 1 W. Set temp.std.cor.of T.13 N.,R.1 E.only(SW.cor.) at this point. All of the previously reestablished std. $\frac{1}{4}$ sec.and sec. cors.being on a direct line between the Tp.cors., they are removed from their original positions and reset at intervals of 40.00 chs. counting from the std.cor.of T.13 N.,R.1 E. & Frac.T.13 N.,R.1 $\frac{1}{4}$ E.,as described in the following notes,changing the year marking on the brass cap of each,from 1913 to 1925.
	----- Resurvey. -----
	The std.cor.of T.13 N.,R.1 E.& Frac.T.13 N.,R.1 $\frac{1}{4}$ E.,is an iron post,3 ins.in diam.,projecting 12 ins.above ground,firmly set,properly marked on brass cap, and witnessed by a mound of stone N. of cor.No bearing trees. Thence, West, on true line,on S.bdy.of sec.36. Over mountainous land,thru scattering timber & undergrowth. Descend 120 ft.over W.slope.
8.90	Wash,30 lks.wide,course SW. Asc.47 ft.over E.slope.
12.00	Spur,slopes S. Desc.138 ft.over SW.slope.
17.50	Wash,10 lks.wide,course SW. Asc.40 ft.over SE.slope
21.40	Spur,slopes S. Desc.130 ft.over W.slope.
23.91	intersect the previously reestablished std. $\frac{1}{4}$ sec.cor.of sec.36,which is an iron post,1 in.in diam.,projecting 12 ins.above ground,properly marked on brass cap,and witnessed by a mound of stone N.of cor. Remove the iron post,scatter the mound of stone,and reset post at 40.00 ch.point. Descend 77 ft.over W.slope.
31.70	East bank of wash,bears N.and S. Thence across wash.
33.00	Center of wash, course S.
35.20	West bank of wash,bears N.and S. Leave wash. Asc. 68 ft.over NE.slope to
40.00	Reset iron post,3 ft.long,14 ins.in ground to bedrock, deposit a stone marked with a cross(X)at base of post, and raise a mound of stone around post,for reestablished std. $\frac{1}{4}$ sec.cor.of sec.36,marked on brass cap, SC <u> $\frac{1}{4}$ S36</u> 1925
	Asc.104 ft.over NE.slope.
46.90	Spur,slopes SW. Desc.246 ft.over W.slope.
54.10	Wash,30 lks.wide,course S. Asc.135 ft.over SE.slope.
61.30	Spur,slopes S. Desc.gradually over SW.slope to
62.46	intersect the C.C. of secs.1 & 2,T.12 N.,R.1 E.,which is an iron post,2 ins.in diam.,projecting 12 ins.above ground,firmly set,properly marked on brass cap and witnessed by a mound of stone S.of cor.No bearing trees. Descend 36 ft.over SW.slope.
64.01	intersect the previously reestablished std.cor.of secs.35 and 36,which is an iron post,2 ins.in diam.,projecting 12 ins.above ground,properly marked on brass cap and witnessed by a mound of stone N.of cor. Remove the iron post,scatter the mound of stone,and reset post at 80.00 ch.point.
68.50	Wash,20 lks.wide,course SW. Ascend 134 ft.over SE.slope to
80.00	Reset iron post,3 ft.long,10 ins.in ground to bedrock, deposit a stone marked with a cross(X)at base of post, and raise a mound of stone around post,for reestablished std.cor.of secs.35 & 36,marked on brass cap SC T13N R1E <u> S35 S36</u> 1925 No bearing trees available.

Resurvey of 3rd Standard Parallel North thru Range 1 East

chains

Land, mountainous.
Soil, rocky, 4th rate.
Timber, cedar and mesquite.
Undergrowth, broomweed, ocotillo, suhuaro & other cacti.

-
- West, on true line, on S. bdy. of sec. 35.
Over rolling and mountainous land, thru scattering timber and undergrowth.
Asc. 34 ft. over SE. slope
- 5.00 Spur, slopes SE. from N. Desc. 169 ft. over SW. slope.
 - 10.50 Wash, 20 lks. wide, course S. Asc. 152 ft. over SE. slope.
 - 18.10 Spur, slopes SW. Descend 150 ft. over NW. slope to
 - 23.90 Intersect the previously reestablished std. $\frac{1}{4}$ sec. cor. of sec. 35, which is an iron post, 1 in. in diam., projecting 12 ins. above ground, properly marked on brass cap and witnessed by a mound of stone N. of cor. No bearing trees.
Remove the iron post, scatter the mound of stone and reset post at 40.00 ch. point.
Desc. 155 ft. over NW. slope.
 - 27.00 East bank of Agua Fria River, about 10 ft. high, brs. N. & S.
 - 28.00 Stream of water, 30 lks. wide, 6 ins. deep, course S.
 - 29.00 West bank of Agua Fria River, brs. N. & S.
Asc. 100 ft. over broken SE. slope.
 - 32.50 Spur, slopes NE. Desc. 51 ft. over N. slope to
 - 40.00 Reset iron post, 3 ft. long, 24 ins. in ground, for reestablished std. $\frac{1}{4}$ sec. cor. of sec. 35, marked on brass cap,

SC
 $\frac{1}{4}$ S35
1925

- No bearing trees available.
Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
Ascend 410 ft. over NE. slope.
- 58.90 Spur, slopes SE. Asc. 19 ft. over S. slope to
 - 62.38 Intersect the C.V. of secs. 2 & 3, T. 12 N., R. 1 E., which is an iron post, 2 ins. in diam., projecting 10 ins. above ground, firmly set, properly marked on brass cap and witnessed by a mound of stone S. of cor. No bearing trees.
Ascend slightly over SE, slope to
 - 63.87 Spur, slopes S. Intersect the previously reestablished std. cor. of secs. 34 & 35, which is an iron post, 2 ins. in diam., projecting 12 ins. above ground, properly marked on brass cap and witnessed by a mound of stone N. of cor. No bearing trees.
Remove the iron post, scatter the mound of stone, and reset post at 80.00 ch. point.
Desc. 69 ft. over SW. slope.
 - 68.00 Wash, 10 lks. wide, course S. Asc. 47 ft. over SE. slope.
 - 73.50 Ridge, bears N. & S. Desc. 49 ft. over NW. slope to
 - 80.00 Reset iron post, 3 ft. long, 24 ins. in ground, for reestablished std. cor. of secs. 34 & 35, marked on brass cap,

SC
T13N | R1E
S34 | S35
1925

No bearing trees available.
Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

Land, rolling and mountainous.
Soil, rocky, 4th rate.
Timber, mesquite and cedar.
Undergrowth, cacti, ocotillo, suhuaro and scrub oak.

West, on true line, on S. bdy. of sec. 34.
Over rolling and mountainous land, thru scattering timber and undergrowth.

6 Resurvey of 3rd Standard Parallel North thru Range 1 East

chains Desc. slightly over N.slope to
 0.60 Spur, slopes NW. Desc. 93 ft. over W. slope
 9.20 Wash, 20 lks. wide, course NE. Ascend 497 ft. over SE. slope.
 23.93 Intersect the previously reestablished std. $\frac{1}{4}$ sec. cor. of
 sec. 34, which is an iron post, 1 in. in diam., projecting
 12 ins. above ground, properly marked on brass cap and
 witnessed by a mound of stone N. of cor. No bearing trees.
 Remove the iron post, scatter the mound of stone, and
 reset post at 40.00 ch. point.
 36.50 Ridge, bears N. & S. Desc. 68 ft. over SW. slope to
 40.00 Reset iron post, 3 ft. long, 24 ins. in ground, for reestab-
 lished std. $\frac{1}{4}$ sec. cor. of sec. 34, marked on brass cap,

SC
 $\frac{1}{4}$ S34
 1925

No bearing trees available.
 Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
 Desc. 24 ft. over SW. slope.
 41.90 Wash, 10 lks. wide, course S. Asc. 105 ft. over SE. slope.
 51.20 Ridge, bears N. & SW. Desc. 173 ft. over NW. slope to wash.
 62.77 Intersect the C.C. of secs. 3 & 4, T. 12 N., R. 1 E., which is
 an iron post, 2 ins. in diam., projecting 12 ins. above
 ground, firmly set, properly marked on brass cap and
 witnessed by a mound of stone S. of cor. No bearing trees.
 64.03 Intersect the previously reestablished std. cor. of secs.
 33 & 34, which is an iron post, 3 ins. in diam., projecting
 12 ins. above ground, properly marked on brass cap and
 witnessed by a mound of stone N. of cor. No bearing trees.
 Remove the iron post, scatter the mound of stone, and
 reset post at 80.00 ch. point.
 66.70 Wash, 20 lks. wide, course NE. Asc. 168 ft. over NE. slope.
 79.60 Spur, slopes NE. Asc. slightly over N. slope to
 80.00 Reset iron post, 3 ft. long, on surface rock, deposit a stone
 marked with a cross (X) at base of post, and raise a mound
 of stone around post, for reestablished std. cor. of secs.
 33 & 34, marked on brass cap,

SC
 T13N | R1E
 S33 | S34
 1925

No bearing trees available.
 Cut a 4 in. cross (X) in a ledge 2 lks. W.
 Land, rolling and mountainous.
 Soil, rocky, 4th rate.
 Timber, mesquite and cedar.
 Undergrowth; scrub oak, ocotillo, suhuaro & other cacti.

West, on true line, on S. bdy. of sec. 33.
 Over rolling and mountainous land, thru scattering timber
 and undergrowth. Ascend slightly over N. slope to
 3.80 Ascend 60 ft. over NE. slope.
 16.00 Spur, slopes NW. Descend 335 ft. over SW. slope to wash.
 24.24 Intersect the previously reestablished std. $\frac{1}{4}$ sec. cor. of
 sec. 33, which is an iron post, 1 in. in diam., projecting
 12 ins. above ground, properly marked on brass cap and
 witnessed by a mound of stone N. of cor. No bearing trees.
 Remove the iron post, scatter the mound of stone and
 reset post at 40.00 ch. point.
 39.40 Power line, bears N. 19° E. and S. 19° W.
 40.00 Reset iron post, 3 ft. long, 8 ins. in ground to bedrock,
 deposit a stone marked with a cross (X) at base of post
 and raise a mound of stone around post, for reestablished
 ed std. $\frac{1}{4}$ sec. cor. of sec. 33, marked on brass cap,

SC
 $\frac{1}{4}$ S33
 1925

Resurvey of 3rd Standard Parallel North thru Range 1 East

- chains No bearing trees available.
- 40.30 Wash, 10 lks. wide, course NW. Asc. 79 ft. over NE. slope.
- 40.70 Telephone line, bears N. 19° E. & S. 19° W.
- 46.40 East edge of top of ridge, brs. N. & S. Thence across rolling top of ridge.
- 57.00 Power line, bears N. 10° E. & S. 10° W.
- 62.95 Intersect the C.C. of secs. 4 & 5, T. 12 N., R. 1 E., which is an iron post, 2 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap and witnessed by a mound of stone S. of cor. No bearing trees. Continue over rolling top of ridge.
- 64.08 Intersect the previously reestablished std. cor. of secs. 32 and 33, which is an iron post, 3 ins. in diam., projecting 10 ins. above ground, properly marked on brass cap and witnessed by a mound of stone N. of cor. No bearing trees. Remove the iron post, scatter the mound of stone, and reset post at 80.00 ch. point.
- 64.10 West edge of top of ridge, brs. NE. & SW. Leave rolling top of ridge and desc. 210 ft. over NW. slope.
- 75.70 County highway, bears N. 15° E. & S. 15° W.
- 77.40 Wash, 20 lks. wide, course NE. Enter nearly level land.
- 79.10 Telephone line, bears NE. & SW.
- 80.00 Reset iron post, 3 ft. long, 24 ins. in ground, for reestablished std. cor. of secs. 32 & 33, marked on brass cap,

SC
T13N | R1E
S32 | S33

1925

No bearing trees available.
Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.
Land, rolling, mountainous and nearly level.
Soil, rocky, 3rd rate.
Timber, mesquite and cedar.
Undergrowth, broomweed, scrub oak, ocotillo & cacti.

- West, on true line, on S. bdy. of sec. 32.
- Over gently rolling land, thru very scattering timber and scattering undergrowth.
- 6.90 Telephone line, bears N. 25° E. & S. 25° W.
- 7.50 A.T. & S.F. R.R. (Prescott & Eastern division) bears N. 25° E. & S. 25° W.
- 8.70 Wash, 30 lks. wide, course SW.
- 9.20 Fence cor. from which fences extend N. 25° E. & W. Thence along fence.
- 20.40 Wash, 20 lks. wide, course SE. Enter mountainous land. Ascend 216 ft. over E. slope
- 24.18 Intersect the previously reestablished std. ¼ sec. cor. of sec. 32, which is an iron post, 1 in. in diam., projecting 10 ins. above ground, properly marked on brass cap and witnessed by mound of stone N. of cor. No bearing trees. Remove the iron post, scatter the mound of stone, and reset post at 40.00 ch. point.
- 33.20 Telephone line, bears NW. & SE.
- 40.00 Reset iron post, 3 ft. long, 24 ins. in ground, for reestablished std. ¼ sec. cor. of sec. 32, marked on brass cap,

SC
¼ S32

1925

No bearing trees available.
Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.
Continue along fence.

- 44.50 Spur, slopes S. Desc. 180 ft. over W. slope.
- 53.10 Power line, bears NW. & SE.
- 56.80 Wash, 10 lks. wide, course SW. Enter rolling land.
- 62.50 House bears N. about 1.00 ch. dist.
- 62.99 Intersect the C.C. of secs. 5 & 6, T. 12 N., R. 1 E., which is

8 Resurvey of 3rd Standard Parallel North thru Range 1 East

chains an iron post, 2 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap and witnessed by a mound of stone S. of cor. No bearing trees. This C.C. is under fence bearing E. & W.
 Continue along fence.
 64.25 Intersect the previously reestablished std. cor. of secs. 31 & 32, which is an iron post, 3 ins. in diam., projecting 10 ins. above ground, properly marked on brass cap and witnessed by mound of stone N. of cor. No bearing trees. Remove the iron post, scatter the mound of stone and reset post at 80.00 ch. point.
 This cor. is alongside fence cor. from which fences extend E. & N.
 Leave E. & W. fence.
 64.60 Wash, 10 lks. wide, course SW.
 67.95 Telephone line, bears NW. & SE.
 70.30 A.T. & S.F. R.R. (Prescott & Eastern division) Bears N. 65° W. & S. 65° E.
 74.40 Wash, 20 lks. wide, course S.
 74.60 Telephone line, bears N. & S.
 77.50 Road, bears N. & S.
 78.50 Road, bears N. & S.
 80.00 Reset iron post, 3 ft. long, 24 ins. in ground, for reestablished std. cor. of secs. 31 & 32, marked on brass cap

SC
 T13N | R1E
 S31 | S32

 1925

No bearing trees available.
 Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.
 Land, gently rolling, mountainous and rolling.
 Soil, rocky, 4th rate.
 Timber, mesquite and cedar.
 Undergrowth, broomweed, scrub oak and cacti.

West, on true line, on S. bdy. of sec. 31.
 Over rolling land, thru scattering undergrowth and very scattering timber.
 3.30 Wash, 10 lks. wide, course S.
 8.40 Wash, 10 lks. wide, course S.
 14.50 Wash, 20 lks. wide, course SE.
 17.00 Wash, 10 lks. wide, course S.
 24.24 Intersect the previously reestablished std. ¼ sec. cor. of sec. 31, which is an iron post, 1 in. in diam., projecting 12 ins. above ground, properly marked on brass cap and witnessed by mound of stone N. of cor. No bearing trees. Remove the iron post, scatter the mound of stone and reset post at 40.00 ch. point.
 30.30 Wash, 10 lks. wide, course SW.
 40.00 Reset iron post, 3 ft. long, 24 ins. in ground, for reestablished std. ¼ sec. cor. of sec. 31, marked on brass cap,


SC
 ¼ S31

 1925

No bearing trees available.
 Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.
 Enter dense undergrowth. Asc. 55 ft. over E. slope.
 47.30 Low spur, slopes SE. Desc. 40 ft. over SW. slope.
 53.90 Enter wash, 10 lks. wide, course SE. from W.
 56.50 Leave wash, course E. from N. Asc. 70 ft. over E. slope.
 57.50 Old house bears S. about 50 lks. dist.
 60.00 Old road brs N. & S. on spur sloping S. Desc. 34 ft.
 61.00 Old house and shaft bears N. about 1.00 ch. dist.
 73.50 Wash, 20 lks. wide, course SE. Asc. 42 ft. over SE. slope.
 77.50 Old road bears NW. & SE.
 78.28 Intersect the C.C. of T_s. 12 & 13 N., R. 1 E., which is an

chains


iron post, 3 ins. in diam., projecting 12 ins. above ground firmly set, properly marked on brass cap and witnessed by a mound of stone E. of cor. No bearing trees. Alter this cor. monument to C.C. of T. 12 N., R. 1 E. and Frac. T. 12 N., R. 1 W., by changing marking on the brass cap to read,



Destroy the mound of stone E. of cor. No bearing trees available. Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, S. of cor. Continue line and measurement. Ascend gradually over S. slope to

85.53

Intersect the G. & S. R. Meridian resurveyed South as herein after described. This point for reestablishment of std cor. of T. 13 N., R. 1 E. only (SW. cor.) falls in a wash, course SE., where it would be impracticable to set monument, therefore at a point 10 lks. North, set an iron post, 3 ft. long, 3 ins. in diam., 24 ins. in ground, for witness cor. to reestablished std. cor. of T. 13 N., R. 1 E. only (SW. cor.), marked on brass cap,



1925

No bearing trees available. Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, NE. of cor.

Land, rolling. Soil, rocky, 4th rate. Timber, mesquite and palo verde. Undergrowth, scrub oak, ocotillo & other cacti.

10 Resurvey of Part of East Boundary of Township 13 N., Range 1 E.

chains

The north $4\frac{1}{2}$ miles of the E.bdy.of T.13 N.,R.1 E.were surveyed by S.W.Foreman,U.S.D.S.in 1871,who also established the cor.of Ts.13 & 14 N.,Rs.1 & 2 E.at same time. The line was surveyed due South and $\frac{1}{4}$ sec.and sec.cors. with common reference to areas both sides of the line were established alternately at intervals of 40.00 chs.thereon.

The cor.of Ts.13 & 14 N.,Rs.1 & 2 E.was reconstructed by G.F.Rigby,U.S.S.in 1917,and said cor.altered to refer to Ts.13 & 14 N.,R.1 E.only. Surveyor Rigby at same time made search along the N. $4\frac{1}{2}$ miles of E.bdy.of T.13 N.,R. 1 E.,reported all cors.missing,and made a resurvey of such portion of the line,due South from the cor.of Ts.13 & 14 N.,R.1 E.,reestablishing $\frac{1}{4}$ sec.and sec.cors.alternately thereon,referring to areas W.of line only,at intervals of 40.00 chs.

The E.bdy.of sec.36 and the S. $\frac{1}{2}$ of E.bdy.of sec.25 were surveyed in 1917 by G.F.Rigby,U.S.S. by a random due South from reestablished $\frac{1}{4}$ sec.cor.of sec.25 to intersection with 3rd Std.Par.N.,where he reestablished the std. cor.of Ts.13 N.,Rs.1 & 2 E.,and then surveyed true range line due North,establishing the $\frac{1}{4}$ sec.cor.of sec.36 and the cor.of secs.25 & 36 at 40.00 and 80.00 chs.North, respectively,from the std.Tp.cor. This survey resulted in a deficiency in measurement of about 12 chs.in the S. $\frac{1}{2}$ of E.bdy.of sec.25.

No other resurvey of the East bdy.of T.13 N.,R.1 E.is of record, however,in 1923, B.J.Kinsey,U.S.S.and Ty White U.S.T. made a retracement of the entire line and surveyed the West bdy.of Frac.T.13 N.,R.1 $\frac{1}{2}$ E. thereon by the establishment of cors.referring to areas in said frac.tp.only at intervals of 40.00 chs.in northing counting from the std.tp.cor.on the 3rd Std.Par.N. Transitman White at same time altered the reestablished std.cor.of Ts.13 N.,Rs.1 & 2 E. to refer to T.13 N.,R.1 E. and Frac.T.13 N.,R.1 $\frac{1}{2}$ E.

The following notes describe a resurvey of that part of the East bdy.of T.13 N.,R.1E. which forms the E.bdy. of sec.36 of said Tp. Topographical items are omitted from these notes for the reason that same agrees with the record of the survey of W.bdy.of Frac.T.13 N.,R.1 $\frac{1}{2}$ E., executed in 1923.

From std.cor.of T.13 N.,R.1 E. & Frac.T.13 N.,R.1 $\frac{1}{2}$ E., on 3rd Std.Par.N.,hereinbefore described,

39.83

N.0° 3'W.,on true line,on E.bdy.of sec.36 intersect the $\frac{1}{4}$ sec.cor.of sec.36 only,which is an iron post,1 in.in diam.,projecting 20 ins.above ground, firmly set in ground and mound of stone,properly marked on brass cap and witnessed by a mound of stone W.of cor. No bearing trees.

40.00

Remove the iron post,and scatter the mounds of stone. intersect the $\frac{1}{4}$ sec.cor.of sec.35,frac.T.13 N.,R.1 $\frac{1}{2}$ E., which is an iron post,1 in.in diam.,projecting 20 ins. above ground,firmly set in ground and mound of stone, properly marked on brass cap and witnessed by a mound of stone E.of cor. No bearing trees.

Alter this cor.monument to refer to the quarters of sec. 36,T.13 N.,R.1 E., and quarters of sec.35,frac.T.13 N. R.1 $\frac{1}{2}$ E. by changing the marking on the brass cap to read

$\frac{1}{4}$
S36 | S35
1925

80.00

No bearing trees available.
Destroy the mound of stone E.of cor.
Raise a mound of stone,3 ft.base,1 $\frac{1}{2}$ ft.high,W.of cor.
Continue line and measurement
intersect the cor.of secs.26 & 35,frac.T.13 N.,R.1 $\frac{1}{2}$ E.,

chains	which is an iron post, 2 ins. in diam., projecting 10 ins. above ground, firmly set, properly marked on brass cap, and witnessed by a mound of stone E. of cor. No bearing trees.
80.24	Continue line and measurement. Intersect the cor. of secs. 25 & 36, T. 13 N., R. 1 E., which is an iron post, 2 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap and witnessed by a mound of stone W. of cor. No bearing trees.

12 Resurvey of the North Boundary of Township 13 N., Range 1 East.

chains	<p>The North bdy. of T. 13 N., R. 1 E. was surveyed in 1871 by S. W. Foreman, U. S. D. S. establishing all cors. thereon with a common reference to areas on both sides of the line.</p> <p>No resurvey or retracement of any part of this Tp. bdy. is of record.</p> <p>The following notes describe a resurvey of the line, reestablishing all missing cors. by proportional measurement between existing cors., and reconstructing all defective cors. Set iron posts with brass caps to monument all cors. and retain the original common reference of same.</p> <p style="text-align: center;">----- Retracement for Resurvey. -----</p>
40.00 78.08	<p>From cor. of Ts. 13 & 14 N., R. 1 E. West, on random line, bet secs. 1 & 36. Original $\frac{1}{4}$ sec. cor. missing. Set temp. cor. Fall 55 lks. S. of remains of original cor. of secs. 1, 2, 35 and 36. True course & dist. of line bet. secs. 1 & 36 are therefore N. 89° 36' W., 78.08 chs.</p>
40.93	<p>West, on random line, bet. secs. 2 & 35 (E. $\frac{1}{2}$) Fall 13 lks. N. of original $\frac{1}{4}$ sec. cor. of secs. 2 & 35. True course & dist. of E. $\frac{1}{2}$ of line bet. secs. 2 & 35 are therefore, S. 89° 49' W., 40.93 chs.</p>
40.43	<p>Thence West, on random line, bet. secs. 2 & 35 (W. $\frac{1}{2}$) Fall 41 lks. S. of remains of original cor. of secs. 2, 3, 34 and 35. True course & dist. of W. $\frac{1}{2}$ of line bet. secs. 2 & 35 are therefore, N. 89° 25' W., 40.43 chs.</p>
40.00 80.16	<p>West, on random line, bet. secs. 3 & 34 Original $\frac{1}{4}$ sec. cor. missing. Set temp. cor. Fall 33 lks. S. of original cor. of secs. 3, 4, 33 & 34. True course and dist. of line bet. secs. 3 & 34 are therefore N. 89° 46' W., 80.16 chs.</p>
40.79	<p>West, on random line, bet. secs. 4 & 33 (E. $\frac{1}{2}$) Fall 69 lks. S. of original $\frac{1}{4}$ sec. cor. of secs. 4 & 33. True course & dist. of E. $\frac{1}{2}$ of line bet. secs. 4 & 33 are therefore, N. 89° 2' W., 40.79 chs.</p>
39.20	<p>Thence West, on random line, bet. secs. 4 & 33 (W. $\frac{1}{2}$) Fall 16 lks. S. of original cor. of secs. 4, 5, 32 & 33. True course & dist. of W. $\frac{1}{2}$ of line bet. secs. 4 & 33 are therefore, N. 89° 46' W., 39.20 chs.</p>
40.00 80.00 120.00 164.09	<p>West, on random line, bet. secs. 5 & 32, and bet. secs. 6 & 31. Original $\frac{1}{4}$ sec. cor. of secs. 5 & 32 missing. Set temp. cor. and continue line and measurement. Original cor. of secs. 5, 6, 31 & 32 missing. Set temp. cor. and continue line and measurement. Original $\frac{1}{4}$ sec. cor. of secs. 6 & 31 missing. Set temp. cor. and continue line and measurement. Fall 291 lks. S. of the cor. of Ts. 13 & 14 N., Rs. 1 E. & 1 W., on the G. & S. R. Meridian. True course & dist. of Tp. bdy. from cor. of secs. 4, 5, 32 & 33 to this Tp. cor. are therefore, N. 88° 59' W., 164.12 chs., which, to maintain original proportion between cor. intervals, gives 40.67 chs. for W. $\frac{1}{2}$ of line bet. secs. 6 & 31, and 41.15 chs. for each of the other three intervals.</p>
	<p>----- Resurvey. -----</p>
	<p>The cor. of Ts. 13 & 14 N., R. 1 E., reconstructed by G. F. Rigby U. S. S. in 1917, is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap and witnessed by a mound of stone W. of cor. No bearing trees. Thence</p>

chains N.89°36'W., on true line, bet. secs. 1 and 36.
 Over rolling land thru dense undergrowth.
 Desc. 82 ft. over NW. slope.
 10.40 Leave undergrowth, brs. NE. & SW. Thence over nearly level valley.
 14.40 Enter washed land, draining SW.
 28.50 Leave washed land. Ascend slightly over SE. slope.
 32.40 Power line, bears N.20°E. & S.20°W.
 34.10 Telephone line, bears N.20°E. & S.20°W.
 37.20 Wash, 150 lks. wide, course S.30°W.
 39.04 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 1 and 36, marked on brass cap,

S36
 $\frac{1}{4}$
 S1
 1925

40.00 Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 Leave valley. Asc. 28 ft. over SE. slope.
 44.00 East edge of top of spur, brs. NE. & SW.
 Thence across level top of spur sloping SW.
 56.00 West edge of top of spur, brs. NE. & SW.
 Leave level top of spur. Desc. 34 ft. over NW. slope.
 58.20 Foot of descent, brs. NE. & SW. Thence over level land in valley, thru scattering undergrowth.
 62.00 Wash, 25 lks. wide, course S.
 66.50 Wash, 30 lks. wide, course SE.
 78.08 Intersect remains of original cor. of secs. 1, 2, 35, & 36, as per testimony of Jackson Henderson whose affidavit accompanies these notes, consisting of stub of juniper post, flush with surface of the ground.
 Reconstruct this cor. monument as follows:
 alongside the wood post stub, set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for cor. of secs. 1, 2, 35 & 36, marked on brass cap,

T14N | R1E
 S35 | S36
 S2 | S1
 T13N
 1925

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 From this cor. a fence cor. brs. N.15°W., 25 lks. dist., from which fences extend N. & W.


Land, rolling, nearly level and level.
 Soil, rocky, 4th rate on slopes, sandy, 2nd rate, in valleys.
 Timber, none.
 Undergrowth, sagebrush, broomweed, scrub oak and cacti.

S.89°49'W., on true line, bet. secs. 2 & 35 (E. 2)
 Over nearly level land, thru scattering undergrowth, along S. side of fence bearing E. & W., about 20 lks. N. of line.
 33.90 Wash, 20 lks. wide, course SW.
 40.39 Fence, bears N. & S. Fence cor. brs. N. 20 lks. dist., from which fences extend E., W. & S.
 40.93 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 2 & 35, which is a granite stone, 6x6x8 ins., marked $\frac{1}{4}$ on one face, lying in a small mound of stone.
 Reconstruct this cor. monument as follows:
 Remove the mound of stone and in center of its position reset old cor. stone 6 ins. in ground, and alongside same set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for $\frac{1}{4}$ sec. cor. of secs. 2 & 35, marked on brass cap,

S35
 $\frac{1}{4}$
 S2
 1925

14 Resurvey of North Boundary of Township 13 North, Range 1 East


chains Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor. Fence, bearing E. & W. is about 55 lks. N. of this cor. Thence, N. 89° 25' W., on true line, bet. secs. 2 & 35 (W. ½) Over nearly level land, thru scattering undergrowth.
 3.50 Wash, 40 lks. wide, course SW.
 10.20 Wash, 15 lks. wide, course SW.
 40.43 Intersect the original cor. of secs. 2, 3, 34 & 35, which is a mound of stone, from which the marked stone has been removed.
 Reconstruct this cor. monument as follows:
 remove the mound of stone and in center of its position set an iron post, 3 ft. long, 2 ins. in diam., deposit a stone marked with a cross (X) at base of post, 24 ins. in ground, for cor. of secs. 2, 3, 34 & 35, marked on brass cap,



Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor. from this cor. house of D. E. Daves brs. S. 26° W. and house of C. W. Goff brs. S. 35° 20' W. Fence bearing E. & W. is about 30 lks. N. of this cor.

Land, nearly level.
 Soil, stony, 4th rate.
 Timber, none.
 Undergrowth, sagebrush, broomweed and cacti.


N. 89° 46' W., on true line, bet. secs. 3 & 34. Over nearly level land, thru scattering undergrowth.
 10.00 Top of slope, brs. N. & SE. Descend 29 ft. over W. slope to
 15.00 Foot of slope, brs. N. & SE. Enter level land.
 15.25 Intersect fence cor. from which fences extend E. & N.
 15.50 Road, bears N. & SE.
 15.75 Fence, brs. N. 10° W. & S. 10° E. Fence cor. brs. S. 10° E. 50 lks. dist. from which fences extend N. 10° W. & W. Enter cultivated land.
 19.20 Fence, brs. N. & S. Fence cor. brs. S. about 80 lks. dist. from which fences extend E. & N. Leave cultivated land.
 21.60 East bank of Agua Fria River, brs. NW. & SE., about 8 ft. high. Thence across river bottom.
 23.60 Dry water channel of Agua Fria River, 40 lks. wide, 1 ft. deep, course SE.
 26.10 West bank of Agua Fria River, brs. NW. & SE. Leave river bottom. Thence over level open land.
 29.00 Fence brs. N. & S. Fence cor. brs. N. about 5 chs. dist., from which fences extend W. & S. Fence cor. brs. S. about 1.00 ch. dist. from which fences extend W. & N.
 40.08 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for reestablished ¼ sec. cor. of secs. 3 & 34, marked on brass cap,



41.00 Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor. Fence, brs. N. 22° W. & S. 22° E. Fence cor. brs. S. 22° E. about 1.00 ch. dist. from which fences extend E. & N. 22° W.
 41.20 Road, bears N. 22° W. & S. 22° E.
 41.80 Telephone line, brs. N. 22° W. & S. 22° E.
 42.20 A. T. & S. F. R. R. (Prescott & Eastern division) brs. N. 22° W. & S. 22° E.

chains
 43.00 Telephone line, brs. N.22°W. & S.22°E.
 43.06 Fence, bears N.22°W. & S.22°E. Fence, cor. brs. S.22°E. about
 50 lks. dist. from which fences extend W. & N.22°W.
 Enter cultivated land.
 53.00 Fence, brs. N. & S. Fence cor. brs. S. about 50 lks. dist.
 from which fences extend E. & N.
 Leave cultivated land.
 54.60 Road, bears NW. & S.
 57.00 Leave level and enter gently rolling land. Asc. 109 ft.
 over E. and SE. slopes.
 58.40 County highway, bears N. & S.
 59.10 Fence, bears N. & S. Fence cor. brs. N. 20 lks. dist. from
 which fences extend N., S. & W.
 65.30 Wash, 10 lks. wide, 4 ft. deep, course SE.
 70.80 Wash, 10 lks. wide, 3 ft. deep, course SE.
 77.00 Low ridge, brs NE. & SW. Desc. 24 ft. over W. slope to
 80.16 Intersect the original cor. of secs. 3, 4, 33 & 34, which is
 is a granite stone 8x12x24 ins., dimly marked with 3
 grooves on each of two opposite faces, lying in a mound
 of stone.

Reconstruct this cor. monument as follows:
 remove the mound of stone, and in center of its position
 reset old cor. stone 16 ins. in ground, and alongside
 same set an iron post, 3 ft. long, 2 ins. in diam., 26 ins.
 in ground, for cor. of secs. 3, 4, 33 & 34, marked on brass
 cap,




Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.
 Fence bearing E. & W. is about 20 lks. N.

Land, nearly level, level and rolling.
 Soil, in river bottom, sandy loam, 2nd rate, elsewhere
 gravelly and rocky, 3rd rate.
 Timber, none.
 Undergrowth, sagebrush, broomweed, and scrub oak.

N. 89° 2' W., on true line, bet. secs. 4 & 33 (E. ¼)
 Over gently rolling land, thru scattering undergrowth.
 Descend 20 ft. over W. slope to
 2.70 Wash, 60 lks. wide, course SE. Enter nearly level land.
 8.30 Wash, 20 lks. wide, course SE.
 9.80 Fence, bears N. & S. Fence cor. brs. N. 10 lks. dist. from
 which fences extend E., W. & S.
 11.50 Road, bears NW. & SE.
 12.00 Enter rolling land. Asc. 46 ft. over NE. slope to
 15.00 Ridge, brs. SE. & W. Ascend 50 ft. along top of ridge.
 20.95 Fence, brs. N. & S. Fence cor. brs. N. 15 lks. dist. from which
 fences extend E., W. & S.
 33.20 Leave top of ridge, brs. NW. & E. Descend 29 ft. over SW.
 slope
 35.50 Wash, 10 lks. wide, course SE. Asc. 52 ft. over NE. slope to
 40.79 Intersect the original ¼ sec. cor. of secs. 4 & 33, which is
 a sandstone, 2x6x10 ins., partly buried in ground, plainly
 marked ¼ on top. No accessories.

Reconstruct this cor. monument as follows:
 alongside old cor. stone, set an iron post, 3 ft. long,
 1 in. in diam., 26 ins. in ground, for ¼ sec. cor. of secs.
 4 & 33, marked on brass cap,



Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.

16 Resurvey of North Boundary of Township 13 North, Range 1 East

chains Thence
 N. $89^{\circ}46'$ W., on true line, bet. secs. 4 & 33 (W. $\frac{1}{2}$)
 Over rolling land, thru scattering undergrowth.
 Asc. 25 ft. over NE. slope
 8.40 Ascend gradually over N. slope to
 16.90 Head of wash, course NE. Asc. over SE. slope
 18.30 Ridge, brs. NE. & SW. Cross fence, bearing nearly E. & W.
 Thence N. of fence. Descend 58 ft. over NW. slope to
 28.85 Wash, 10 lks. wide, course NE. Asc. gradually over NE. slope.
 35.10 Desc. over NW. slope
 36.20 Wash, 10 lks. wide, course NE.
 38.90 Wash, 10 lks. wide, course NE.
 39.20 Intersect the original cor. of secs. 4, 5, 32 & 33, which is
 a stone, 12x18x20 ins., marked with 2 grooves on one
 face and 4 grooves on opposite face, lying in a mound
 of stone.
 Reconstruct this cor. monument as follows:
 remove the mound of stone and in center of its position
 reset old cor. stone 14 ins. in ground and alongside
 same set an iron post, 3 ft. long, 2 ins. in diam., 28 ins.
 in ground, for cor. of secs. 4, 5, 32 & 33, marked on brass
 cap,

T14N	R1E
S32	S33
S5	S4
T13N	
1925	

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling and nearly level.
 Soil, gravelly and rocky, 3rd & 4th rate.
 Timber, none.
 Undergrowth, sagebrush, broomweed, scrub oak & cacti.

N. $88^{\circ}59'$ W., on true line, bet. secs. 5 & 32.
 Over rolling land, thru scattering undergrowth.
 Ascend gradually over NE. slope.
 4.30 Wash, 50 lks. wide, course NE. Asc. over S. slope.
 12.10 Road, bears N. 70° E. & S. 70° W.
 18.00 Asc. 71 ft. over SE. slope.
 26.65 Desc. 27 ft. over SW. slope.
 28.70 Wash, 25 lks. wide, course SE. Asc. gradually over SE. slope to
 41.15 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in
 diam., 18 ins. in ground to bedrock, deposit a stone
 marked with a cross (X) at base of post, and raise a
 mound of stone around post, for reestablished $\frac{1}{4}$ sec. cor.
 of secs. 5 & 32, marked on brass cap,

S 32
$\frac{1}{4}$
S 5
1925

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 Continue gradual ascent over SE. slope.
 42.30 Wash, 10 lks. wide, course SE.
 48.80 Shallow wash, 150 lks. wide, course SE. Asc. NE. slope.
 54.90 Wash, 10 lks. wide, course NE.
 57.00 Enter dense undergrowth. Asc. 184 ft. over NE. slope to
 82.30 (Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in
 diam., 26 ins. in ground, for reestablished cor. of secs.
 5, 6, 31 & 32, marked on brass cap,


T14N	R1E
S31	S32
S6	S5
T13N	
1925	

chains

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.
 Land, rolling.
 Soil, rocky, 4th rate.
 Undergrowth, sagebrush, broomweed and scrub oak.

3.40
 14.00
 33.00
 41.15

N. 88° 59' W., on true line, bet. secs. 6 & 31.
 Over rolling land, thru dense undergrowth.
 Ascend slightly over NE. slope to
 Descend 63 ft. over NW. slope
 Wash, 20 lks. wide, course NE. Enter mountainous land.
 Asc. 177 ft. over SE. slope.
 Spur, slopes NE. Desc. 50 ft. over NW. slope to
 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in
 diam., 26 ins. in ground, for reestablished 4 sec. cor.
 of secs. 6 & 31, marked on brass cap,



46.10
 66.00
 75.30
 80.80
 81.82

Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.
 Desc. 68 ft. over NW. slope.
 Wash, 20 lks. wide, course NE. Asc. 190 ft. over SE. slope.
 Spur, slopes NE. Desc. 91 ft. over NW. slope.
 Wash, 10 lks. wide, course NE. Asc. 94 ft. over SE. slope.
 Spur, slopes NE. Desc. slightly over NW. slope to
 intersect the cor. of Ts. 13 & 14 N., Rs. 1 E. & 1 W.,
 reconstructed in original position by J.B. McLaughlin,
 U.S.D.S. in 1883, which is a granite stone, 8x12x16 ins.
 marked with 6 grooves on each of E., W., N. & S. faces,
 set in a mound of stone, and witnessed by a mound of
 stone SE. of cor. and one bearing tree,
 a juniper stump, 14 ins. diam., S. 20° W., 6 lks. dist.,
 marked T13N RLW S1 BT.

Reconstruct this cor. monument as follows:
 remove the mound of stone and in center of its position
 reset old cor. stone 11 ins. in ground and alongside
 same set an iron post, 3 ft. long, 3 ins. in diam., 14 ins.
 in ground to bedrock, deposit a stone marked with a
 cross (X) at base of post, and raise a mound of stone
 around post, for cor. of Ts. 13 & 14 N., Rs. 1 E. & 1 W.,
 marked on brass cap,



No bearing trees available.
 Stub of an old fence line bears N. from this cor.
 The original cor. of secs. 1, 2, 35 & 36, Ts. 13 & 14 N.,
 R. 1 W., bears N. 89° 56' W., 80.74 chs. dist.

Land, rolling and mountainous.
 Soil, rocky, 4th rate.
 Timber, a few scattered cedars.
 Undergrowth, sagebrush, broomweed, scrub oak & cacti.

Resurvey of Gila & Salt River Meridian thru Township 13 North,
as West Bdy. of Township 13 North, Range 1 East.

chains. The North four miles of The G. & S.R. Meridian in T.13 N. was surveyed due South by S.W. Foreman, U.S.D.S. in 1871, establishing $\frac{1}{4}$ sec. and sec. cors. alternately thereon at intervals of 40 chs. with common reference to areas on both sides of the line.

In 1883, J.B. McLaughlin, U.S.D.S. retraced the N. 4 miles of the G. & S.R. Meridian in T.13 N., reported all the sec. and $\frac{1}{4}$ sec. cor. monuments missing, reconstructed the cor. of Ts. 13 & 14 N., Rs. 1 E. & 1 W. in its original position, and resurveyed such portion of the Meridian due South therefrom, reestablishing all the cors. thereon with their original common reference, at 40 ch. intervals.

In 1883, J.B. McLaughlin, U.S.D.S. surveyed the South two miles of the Meridian in T.13 N., due South from the reestablished cor. of secs. 19, 24, 25 & 30, establishing cors. with common reference to areas both sides of the line, at 40 ch. intervals, to an intersection with the 3rd Std. Par. N., where he established C.C. of Ts. 13 N., Rs. 1 E. & 1 W.

No resurvey of the S. 2 miles of the Meridian in T.13 N. is of record, and no resurvey of the N. 4 miles subsequent to the 1883 resurvey is of record.

The following notes describe a resurvey of the Meridian thru T.13 N., altering existing cors. to refer to areas E. of line only; except in the S. 3 miles which portion of the line is independently resurveyed as per instructions. Missing cors. in the N. 3 miles are reestablished by proportional measurement between existing cors. and are marked and witnessed for reference to areas in T.13 N., R. 1 E. only.

No cors. referring to areas in T.13 N., R. 1 W. are reestablished on the Meridian at this time, as the E. $\frac{1}{2}$ of said Tp. is un-surveyed and their positions cannot be properly determined until the survey of the completion of the subdivision of said tp. is executed.

Retracement for Resurvey.

- 39.65 From cor. of Ts. 13 & 14 N., Rs. 1 E. & 1 W.,
South, on random line, on W. bdy. of sec. 6 (N. $\frac{1}{2}$)
Fall 42 lks. E. of the previously reestablished $\frac{1}{4}$ sec. cor.
of secs. 1 & 6,
True course & dist. of N. $\frac{1}{2}$ of W. bdy. of sec. 6 are therefore
S. 0° 36' W., 39.65 chs.
Thence
- 40.11 South, on random line, on W. bdy. of sec. 6 (S. $\frac{1}{2}$)
Fall 37 lks. E. of the previously reestablished cor. of secs.
1, 6, 7 & 12.
True course & dist. of S. $\frac{1}{2}$ of W. bdy. of sec. 6 are therefore
S. 0° 32' W., 40.11 chs.

- 40.03 South, on random line, on W. bdy. of sec. 7 (N. $\frac{1}{2}$)
Fall 69 lks. E. of the previously reestablished $\frac{1}{4}$ sec. cor.
of secs. 7 & 12.
True course & dist. of N. $\frac{1}{2}$ of W. bdy. of sec. 7 are therefore
S. 0° 59' W., 40.03 chs.
Thence
- 39.87 South, on random line, on W. bdy. of sec. 7 (S. $\frac{1}{2}$)
Fall 57 lks. W. of the previously reestablished cor. of secs.
7, 12, 13 & 18.
True course & dist. of S. $\frac{1}{2}$ of W. bdy. of sec. 7 are therefore
S. 0° 49' E., 39.87 chs.

- 40.00 South, on random line, on W. bdy. of sec. 18
No trace of the previously reestablished $\frac{1}{4}$ sec. cor. can
be found. Set temp. cor. and continue line and
measurement.
- 75.04 Fall 108 lks. E. of the previously reestablished cor. of
secs. 13, 18, 19 & 24.
True course & dist. of W. bdy. of sec. 18 are therefore
S. 0° 50' W., 75.04 chs.

Resurvey of Gila & Salt River Meridian thru Township 13 North
as West Bdy. of Township 13 North, Range 1 East.

chains Thence
 South, on random line, for distance only, setting temp.
 cors. at intervals of 40 chs. and at
 238.32 Intersect the 3rd Std. Par. N. resurveyed West as hereinbe-
 fore described, at 7.25 chs. West from the C.C. of
 Ts. 12 & 13 N., R. 1 E., changed by said resurvey to C.C.
 of T. 12 N., R. 1 E. & Frac. T. 12³/₄ N., R. 1 W.
 This point of intersection is the point for reestab-
 lishment of the std. cor. of T. 13 N., R. 1 E. only (SW. cor.)
 but as the same falls in a wash, a witness cor. thereto
 is established at 10 lks. N. as hereinbefore described.

 Resurvey.

From cor. of Ts. 13 & 14 N., Rs. 1 E. & 1 W., hereinbefore
 described,
 S. 0° 36' W., on true line, on W. bdy. of sec. 6 (N. ¹/₂)
 Over rolling land, thru very scattering timber and dense
 undergrowth.
 Asc. 21 ft. over NW. slope
 2.28 Spur, slopes NE. Desc. 30 ft. over SE. slope.
 7.25 Asc. 61 ft. over N. slope.
 14.80 Spur, slopes NE. from W. Enter mountainous land.
 Descend 139 ft. over SE. slope.
 15.70 Wire fence, bears E. & W. Fence cor. brs. E. about 5 chs.
 dist. from which fences extend E., W. & S.
 23.00 Wash, 10 lks. wide, course SE. Asc. 82 ft. over NE. slope.
 24.65 Desc. 47 ft. over S. slope.
 30.00 Wash, 20 lks. wide, course E. Asc. 160 ft. over N. slope.
 31.30 Fence cor. bears E. about 5 chs. dist. from which fences
 extend N. 70° E., S. & N.
 39.65 Intersect the previously reestablished ¹/₄ sec. cor. of secs.
 1 & 6, which is a granite stone, 6x8x10 ins. marked ¹/₄ on
 W. face, set in a mound of stone. No accessories.
 Reconstruct this cor. monument and alter same to refer to
 the quarters of sec. 6 only, as follows:
 remove the mound of stone and in center of its position
 reset old cor. stone 6 ins. in ground, and alongside same
 set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 ground, for ¹/₄ sec. cor. of sec. 6 only, marked on brass
 cap,

| ¹/₄ S6
 1925

No bearing trees available.
 Raise a mound of stone, 3 ft. base, 1 ¹/₂ ft. high, E. of cor.
 Thence
 S. 0° 32' W., on true line, on W. bdy. of sec. 6 (S. ¹/₂)
 Over mountainous and rolling land, thru very scattering
 timber and dense undergrowth.
 Asc. 25 ft. over N. slope.
 3.30 Ridge, bears N. 70° E. & S. 70° W. Desc. 89 ft. over SE. slope.
 16.50 Wash, 20 lks. wide, course NE. Asc. 50 ft. over NW. slope.
 28.20 Ridge, bears NE. & SW. Desc. 70 ft. over SE. slope to sec. cor.
 28.90 Road, bears N. 70° W. & S. 70° E.
 35.90 Wash, 10 lks. wide, course SE.
 40.11 Intersect the previously reestablished cor. of secs. 1, 6,
 7 & 12, which is a granite stone 8x12x14 ins., marked
 with 1 groove on N. face and 5 grooves on S. face,
 set in a mound of stone. No accessories.
 Reconstruct this cor. monument and alter same to refer to
 secs. 6 & 7 only as follows:
 remove the mound of stone and in center of its position
 reset old cor. stone 10 ins. in ground, and alongside
 same, set an iron post, 3 ft. long, 2 ins. in diam., 26 ins.
 in ground, for cor. of secs. 6 & 7 only, marked on brass
 cap,

Resurvey of Gila & Salt River Meridian thru Township 13 North
as West Boundary of Township 13 North, Range 1 East

20

chains.

T13N
R1E
S6
S7

1925

and establish bearing trees as follows:

A juniper, 4 ins.diam., brs. N.71 $\frac{1}{2}$ °E., 144 lks.dist.,
marked T13N R1E S6 BTA hackberry, 10 ins.diam., brs. S.7 $\frac{1}{2}$ °E., 277 lks.dist.,
marked T13N R1E S7 BT

Childers house brs.S.48°10'E.about 30 chs.dist.

Land, mountainous and rolling.

Soil, rocky, 4th rate.

Timber, juniper, cedar and hackberry.

Undergrowth, sagebrush, scrub oak and cacti.

S.0°59'W., on true line, on W.bdy.of sec.7 (N. $\frac{1}{2}$)Over rolling and mountainous land, thru very scattering
timber and dense undergrowth.

Desc.42 ft.over SE.slope.

3.10 Wash, 35 lks.wide, course SE. Asc.65 ft.over NE.slope.

6.30 Spur, slopes E. Desc.25 ft.over S.slope.

8.80 Wash, 10 lks.wide, course E. Asc.70 ft.over N.slope.

17.70 Spur, slopes E. Desc.32 ft.over SE.slope.

28.80 Wash, 10 lks.wide, course SE. Asc. 40 ft.over N.slope to

40.03 Intersect the previously reestablished $\frac{1}{4}$ sec.cor.of secs.7 & 12, which is a quartz stone 6x8x10 ins., marked $\frac{1}{4}$
on W.face, set in a mound of stone.No accessories.Reconstruct this cor.monument and alter its reference to
the quarters of sec.7 only as follows:remove the mound of stone and in center of its position
reset old cor.stone 8 ins.in ground, and alongside
same set an iron post, 3 ft.long, 1 in.in diam., 26 ins.
in ground, for $\frac{1}{4}$ sec.cor.of sec.7 only, marked on brass
cap,

$\frac{1}{4}$ S7

1925

No bearing trees available.

Raise a mound of stone, 3 ft.base, 1 $\frac{1}{2}$ ft.high, E.of cor.

Thence

S.0°49'E., on true line, on W.bdy.of sec.7 (S. $\frac{1}{2}$)Over rolling land, thru very scattering timber and dense
undergrowth.

Asc.26 ft.over N.slope.

4.50 Top of low knoll. Desc.35 ft.over S.slope.

10.00 Wash, 20 lks.wide, course NE. Asc.34 ft.over NE.slope to

14.20 Wash, 10 lks.wide, course NE. Asc.66 ft.over NW.slope.

21.70 Spur, slopes NE. Desc.31 ft.over SE.slope.

26.25 Asc.15 ft.over NW.slope.

27.90 Spur, slopes NE. Desc.28 ft.over SE.slope.

32.70 Wash, 10 lks.wide, course NE. Asc.59 ft.over NW.slope to

39.87 Intersect the previously reestablished cor.of secs.7, 12,

13 & 18, which is a lava stone, 12x12x14 ins., marked
with 2 grooves on N.face and 4 grooves on S.face and
set in a mound of stone. No accessories.Reconstruct this cor.monument and alter same to refer to
secs.7 & 18 only as follows:remove the mound of stone and in center of its position
reset old cor.stone 10 ins.in ground, and alongside
same set an iron post, 3 ft.long, 2 ins.in diam., 20 ins.
in ground to bedrock, deposit a stone marked with a
cross(X) at base of post, and raise a mound of stone
around post, for cor.of secs.7 & 18 only, marked on
brass cap,

Resurvey of Gila & Salt River Meridian thru Township 13 North
as West Boundary of Township 13 North, Range 1 East

chains

T13N
R1E
S7
S18

1925

No bearing trees available.

Land, rolling and mountainous.
Soil, rocky, 4th rate.
Timber, cedar and juniper.
Undergrowth, scrub oak, sagebrush and cacti.

S.0°50'W., on true line, on W. bdy. of sec. 18.
Over rolling land, thru very scattering timber and dense undergrowth.

- asc. 13 ft. over NW. slope.
- 2.20 Spur, slopes NE. Desc. 51 ft. over SE. slope.
- 2.90 Blaze a juniper tree 16 ins. diam., about 40 lks. W. of line.
- 16.80 Wash, 10 lks. wide, course NE. Asc. 55 ft. over N. slope.
- 24.20 Spur, slopes E. Desc. 34 ft. over SE. slope.
- 33.60 Wash, 10 lks. wide, course NE. Asc. 50 ft. over NE. slope to
- 37.52 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 18 only, marked on brass cap,

$\frac{1}{4}$ S18

1925

No bearing trees available.
Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, E. of cor.
Asc. slightly over NE. slope to

- 40.05 Wash, 15 lks. wide, course NE. from SE. Asc. 163 ft. over NE. slope to
- 64.15 Same wash, 20 lks. wide, course NE. Asc. 115 ft. over N. slope
- 75.04 Intersect the previously reestablished cor. of secs. 13, 18, 19 & 24, which is a stone, 8x14x20 ins., marked with 3 grooves on each of N. & S. faces and set in a mound of stone. No accessories.

Reconstruct this cor. monument and alter same to refer to secs. 18 & 19 only as follows:
remove the mound of stone and in center of its position reset old cor. stone 15 ins. in ground and alongside same set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for cor. of secs. 18 & 19, marked on brass cap,

T13N
R1E
S18
S19

1925

No bearing trees available.
Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, E. of cor.

Land, rolling.
Soil, rocky, 4th rate.
Timber, cedar and juniper.
Undergrowth, scrub oak, thornbush and cacti.

South, on true line, on W. bdy. of sec. 19.
Over mountainous land, thru very scattering timber and dense undergrowth.
Asc. 98 ft. over N. slope.

- 7.65 Ridge, bears E. & W. Desc. 283 ft. over S. slope.
- 21.70 Wash, 20 lks. wide, course SE. Asc. 107 ft. over NE. slope.

Resurvey of Gila & Salt River Meridian thru Township 13 North
as West Boundary of Township 13 North, Range 1 East

chains.

28.50 Spur, slopes SE. Desc. 241 ft. over SW. slope.
40.20 Wash, 15 lks. wide, course SE. Asc. 67 ft. over NE. slope
48.70 Spur, slopes E. Desc. 14 ft. over SE slope to
49.02 (40.00 chs. N. from cor. of secs. 19 & 30) Set an iron post,
3 ft. long, 1 in. in diam., 24 ins. in ground, for reestab-
lished $\frac{1}{4}$ sec. cor. of sec. 19 only, marked on brass cap,

$\frac{1}{4}$ S19

1925

No bearing trees available.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, E. of cor.
Desc. 115 ft. over SE. slope.

53.60 House brs. E. about 10 chs. dist.

58.55 Ascend 25 ft. over NE. slope.

61.20 Spur, slopes E. Desc. 54 ft. over SE. slope.

65.00 Wash, 20 lks. wide, course NE. Asc. 91 ft. over NW. slope.

76.80 Ridge, bears E. & W. Desc. 45 ft. over SE. slope to sec. cor.

82.00 Wash, 10 lks. wide, course SE.

88.80 Wash, 20 lks. wide, course SE.

89.02 (Apont due West of original cor. of secs. 20, 21, 28 & 29)

Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in
ground to bedrock, deposit a stone marked with a cross
(X) at base of post, and raise a mound of stone around
post, for reestablished cor. of secs. 19 & 30 only,
marked on brass cap,

T13N	
R1E	
S19	
<hr/>	
S30	

1925

No bearing trees available.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, cedar.

Undergrowth, scrub oak, thornbush and manzanits.

South, on true line, on W. bdy. of sec. 30.

Over mountainous land, thru very scattering timber and
dense undergrowth.

Desc. 52 ft. over SE. slope.

8.00 Wash, 20 lks. wide, course SE. Asc. 12 ft. over NE. slope

9.00 Desc. 51 ft. over SE. slope

11.70 Road to Lelan Mine, about 10 chs. W., brs. E. & W.

14.10 Old house, brs. W. about 100 lks. dist.

15.00 Wash, 20 lks. wide, course E. Asc. 207 ft. over N. slope.

29.00 Ridge, bears E. & W. Desc. slightly to

29.30 (40.00 chs. North from cor. of secs. 30 & 31) Set an iron
post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for
reestablished $\frac{1}{4}$ sec. cor. of sec. 30 only, marked on
brass cap,

$\frac{1}{4}$ S30

1925

No bearing trees available.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, E. of cor.
Desc. 167 ft. over S. slope

31.70 Road, bears E. & W.

37.10 Telephone line, bears E. & W.

42.80 Bottom of Ticónderoga Gulch, 30 lks. wide, course E. & W.

Asc. 195 ft. over N. slope.

Resurvey of Gila & Salt River Meridian thru Township 13 North
as West Boundary of Township 13 North, Range 1 East

chains

43.84 From this point a U.S.L.M. (unnumbered) at junction of Ticonderoga and Dividend Gulches, bears S.87°54'W., 6.09 chs.dist. This USLM is a 4 in.cross(X) cut on surface rock on an outcropping ledge, with the letters U S L M cut in rock SE. of cross about 3 ft. dist. A mound of stone, 3 ft. base, 2 ft. high, about 3 ft. N. of cross forms an accessory to this monument.

43.90 Old road, bears NW. & SE.

49.00 Bend in old road, bears NE. & SE.

55.40 Old road, bears SE. & W.

57.60 Ridge, bears E. & W. A house, 20x40 ft. is on line at this point. The Little Jessie Mine bears N.60°E., about 7 chs. dist.

69.30 (80.00 chs. N. from SW. cor. of T. 13 N., R. 1 E.) Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in ground to bedrock, deposit a stone marked with a cross (X) at base of post and raise a mound of stone around post, for reestablished cor. of secs. 30 & 31 only, marked on brass cap,



1925

No bearing trees available.
From this cor., Cor. No. 1 of "Opportunity" patented lode mining claim, Mineral Survey No. 1499, identical with Cor. No. 2 of "New Year" patented lode mining claim of same survey, bears N.47°00'E., 6.20 chs. dist.

The South half of W. bdy. of sec. 30 crosses several patent-
ed mining claims, but intersections with same could not be obtained in this resurvey as diligent search failed to locate and identify any of the cors. of these claims.

These mineral surveys were made some 50 years ago, and as much of the land has been completely changed since that time by reason of the dumps and cave-ins of the mines in this vicinity, the cors. of these old mining claims have probably been totally destroyed.

Land, mountainous.
Soil, rocky, 4th rate.
Timber, cedar.
Undergrowth, scrub oak, manzanita and cacti.

South, on true line, on W. bdy. of sec. 31.
Over mountainous land, thru very scattering timber and dense undergrowth.
Desc. 79 ft. over SE. slope.

7.90 Fence, bears E. & W. Fence cor. brs. E. about 2 chs. dist. from which fences extend W. & S.
Enter orchard. Nearly level land.

9.90 Wash, 10 lks. wide, course E.

10.60 Fence, brs. E. & W. Fence cor. brs. E. about 2 chs. dist. from which fences extend W. & N. House, E. 5 chs. dist.
Leave orchard.

11.60 Trail, bears E. & W. Enter mountainous land.
Asc. 354 ft. over N. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in ground to bedrock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for reestablished cor. of sec. 31 only, marked on brass cap,

24 Resurvey of Gila & Salt River Meridian thru Township 13 North
as West Boundary of Township 13 North, Range 1 East.

chains.

| $\frac{1}{4}$ S31

1925

No bearing trees available.

- Asc. 8 ft. over N. slope
 41.00 Ridge, bears E. & W. Asc. 586 ft. over steep S. slope to
 71.90 Foot of steep slope. Telephone line, brs. E. & W.
 Enter rolling land. Desc. 70 ft. over gradual S. slope
 to Tp. cor.
 72.90 Power line, bears E. & W.
 75.73 Intersect original position of the 3rd Std. Par. N.
 The C.C. of T. 13 N., R. 1 W., & Frac. T. 12 $\frac{1}{2}$ N., R. 1 W. is not
 established at this point for the reason that future
 independent resurvey of the 3rd Std. Par. N. thru E. $\frac{1}{2}$ of
 R. 1 W. will probably determine another point of
 intersection.
 Destroy the existing cors. easterly from this point
 as follows: C.C. of Ts. 13 N., Rs. 1 E. & 1 W.; the Std.
 Meridian cor.; and the C.C. of Frac. T. 12 $\frac{1}{2}$ N., R. 1 W.
 (NE. cor.) established by S. E. Blout, U.S.S. in 1913.
 78.30 A.T. & S.F. R.R. (Prescott & Eastern division) brs. E.
 and W.
 79.90 The witness cor. to reestablished std. cor. of T. 13 N.,
 R. 1 E. only (SW. cor.), hereinbefore described.
 80.00 True point for reestablished std. cor. of T. 13 N., R. 1 E.
 only (SW. cor.) at intersection with 3rd Std. Par. N.
 resurveyed West thru R. 1 E. as hereinbefore described.
 This point is in a wash, course SE.

Land, mountainous and rolling.

Soil, rocky, 4th rate.

Timber, cedar.

Undergrowth, scrub oak manzanita and cacti.

Boundaries of Township 13 North, Range 1 East
 Latitudes, departures and closing errors.

Lines designated	True course	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
South boundary (3rd Std.Par.N.)	West	485.53				485.53
West boundary (G. & S.R. Meridian)	North	238.32	238.32			
	N. 0° 50' E.	75.04	75.04		1.08	
	N. 0° 49' W.	39.87	39.87			.57
	N. 0° 59' E.	40.03	40.03		.69	
	N. 0° 32' E.	40.11	40.11		.37	
	N. 0° 36' E.	39.65	39.65		.42	
North boundary	S. 88° 59' E.	164.12		2.91	164.09	
	S. 89° 46' E.	39.20		.16	39.20	
	S. 89° 2' E.	40.79		.69	40.79	
	S. 89° 46' E.	80.16		.33	80.16	
	S. 89° 25' E.	40.43		.41	40.43	
	N. 89° 49' E.	40.93	.13		40.93	
	S. 89° 36' E.	78.08		.55	78.08	
East boundary	S. 0° 3' E.	40.19		40.19	.03	
	SOUTH	80.05		80.05		
	S. 0° 6' W.	39.93		39.93		.07
	S. 0° 5' W.	40.00		40.00		.06
	SOUTH	40.02		40.02		
	S. 0° 3' W.	39.95		39.95		.03
	S. 0° 6' W.	39.93		39.93		.07
	S. 0° 3' W.	67.79		67.79		.06
S. 0° 3' E.	80.24		80.24	.07		
Convergencý					.49	
Totals.			473.15	473.15	486.83	486.39
			473.15		486.39	
	Error in latitude		0.00			
	Error in departure				0.44	


chains.

The following notes describe the survey of the "Independence" lode mining claim, for the purpose of segregating same from sections 4 & 9, T.13 N., R.1 E.

TIE to Claim.

From the reestablished cor. of secs. 4, 5, 8 & 9, T.13 N., R.1 E. hereinafter described,
N. $56^{\circ}36'$ E., on true line, toward flag visible on the NW.

- 8.67 location cor. of "Independence" claim.
Intersect NW. location cor. of "Independence" claim, identical with SW. location cor. of "2nd Independence" claim, which is a mound of stone, 4 ft. base, $1\frac{1}{2}$ ft. high.
Remove the mound of stone and in center of its position set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for Cor. No. 1 (NW. cor.) of "Independence" claim, and Cor. No. 1 (SW. cor.) of "2nd Independence" claim, marked on brass cap,



Retracement of Location.

From NW. location cor., described above,
N. $82^{\circ}5'$ E., on true line, toward flag visible at the north end center cor. of location.

- 4.55 Intersect N.E.C. cor. of "Independence" location, identical with S.E.C. cor. of "2nd Independence" location, hereinafter described.
True course & dist. of W. $\frac{1}{2}$ of N. end line of location are therefore, N. $82^{\circ}5'$ E., 4.55 chs.
Thence
N. $82^{\circ}5'$ E., on true line, toward flag visible at NE. location cor.
- 4.45 Intersect NE. location cor. of "Independence" location, identical with SE. location cor. of "2nd Independence" location, hereinafter described.
True course & dist. of E. $\frac{1}{2}$ of N. end line of location are therefore, N. $82^{\circ}5'$ E., 4.45 chs.
Thence
S. $10^{\circ}24'$ E., on true line, toward flag visible at SE. cor. of location.
- 24.75 Intersect SE. location cor. of "Independence" claim, which is a mound of stone, 4 ft. base, 2 ft. high.
True course & dist. of E. side line of location are therefore, S. $10^{\circ}24'$ E., 24.75 chs.
Thence
S. $51^{\circ}51'$ W., on true line, toward flag visible at south end center cor. of location.
- 4.21 Intersect S.E.C. cor. of location, which is a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high., from which a flag on N.E.C. cor. of location is visible and bears N. $12^{\circ}6'$ W.
True course & dist. of E. $\frac{1}{2}$ of S. end line of location are therefore, S. $51^{\circ}51'$ W., 4.21 chs.
Thence
N. $87^{\circ}17'$ W., on true line, toward flag visible at SW. location cor. of claim.
- 5.50 Intersect SW. location cor., which is a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high.
True course & dist. of W. $\frac{1}{2}$ of S. end line of location are therefore, N. $87^{\circ}17'$ W., 5.50 chs.
Thence
N. $10^{\circ}20'$ W., on true line, toward flag visible at NW. location cor.
- 25.91 Intersect NW. location cor.


Segregation Survey of "Independence" lode mining claim

chains

True course & dist. of W. side line of location are therefore, N.10°20'W., 25.91 chs.


SURVEY.

From Cor. No. 1 (NW. cor.) of claim, monumented with a brass-capped iron post as hereinbefore described,
 S.12° 6'E., (parallel to lode line) on W. side line of claim.
 22.73 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in ground to bedrock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for Cor. No. 2 (SW. cor.) of claim, marked on brass cap




From this cor. the SW. location cor. bears S.2°W., 3.27 chs. dist.
 From Cor. No. 2
 N.82° 5'E., on true line, on S. end line of claim.
 4.55 Intersect lode line at a point 4.15 chs. N.12°6'W. from S.E.C. cor. of location.

Continue line and measurement
 8.41 Intersect E. side line of location at a point 2.02 chs. N.10°24'W. from SE. location cor.
 at this point of intersection, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for Cor. No. 3 (SE. cor.) of claim, marked on brass cap



Raise a mound of stone, 3 ft. base, 1½ ft. high, NW. of cor.
 Thence
 N.10°24'W., on true line, on E. side line of claim, identical with E. side line of location.
 22.73 Intersect NE. location cor. which is a mound of stone, 4 ft. base, 1½ ft. high.
 Remove the mound of stone and in center of its position set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for Cor. No. 4 (NE. cor.) of "Independence" claim, and Cor. No. 2 (SE. cor.) of "2nd Independence" claim, marked on brass cap,




Raise a mound of stone, 3 ft. base, 1½ ft. high, S.82°5'W. of cor.
 Thence
 S.82° 5'W., on true line, on N. end line of claim, identical with N. end line of location of "Independence" claim, and S. end line of "2nd Independence" location and claim.

4.45 Intersect N.E.C. cor. of location, which is a mound of stone, 3 ft. base, 1½ ft. high.
 Continue line and measurement.
 9.00 Intersect Cor. No. 1 (NW. cor.) the place of beginning.

chains.	<p>The following notes describe the survey of the "2nd Independence" lode mining claim, for the purpose of segregating same from section 4, of T.13 N., R.1 E.</p> <p style="text-align: center;">-----</p> <p style="text-align: center;">Retracement of Location.</p> <p style="text-align: center;">-----</p> <p>The S. end line of the location is identical with the N. end line of "Independence" location retraced as hereinbefore described.</p> <p>From SE. location cor., identical with NE. location cor. of "Independence" location, N. 1° 36' E., on true line, toward flag visible on NE. location cor.</p> <p>24.76 Intersect NE. location cor., which is a mound of stone, with a R.R. rail about 3 ft. long set in center of mound. True course & dist. of E. side line of location are therefore N. 1° 36' E., 24.76 chs. Thence S. 85° 7' W., on true line, toward flag visible on N.E.C. cor. of location.</p> <p>5.06 Intersect N.E.C. cor. of location, which is a mound of stone with a R.R. rail about 3 ft. long set in center of md. True course & dist. of E. side of N. end line of location are therefore, S. 85° 7' W., 5.06 chs. From N.E.C. cor. of location a flag visible at S.E.C. cor. bears S. 0° 7' W. From N.E.C. cor., S. 82° 55' W., on true line, toward flag visible on NW. cor. of location.</p> <p>5.03 Intersect NW. location cor., which is a mound of stone with a R.R. rail about 3 ft. long set in center of mound. True course & dist. of W. side of N. end line of location are S. 82° 55' W., 5.03 chs. Thence S. 1° 00' E., on true line, toward flag visible on SW. cor. of location.</p> <p>24.96 Intersect SW. location cor. and Cor. No. 1 of claim, identical with NW. location cor. and Cor. No. 1 of "Independence" claim, hereinbefore described. True course & dist. of W. side line of location are therefore, S. 1° 00' E., 24.96 chs.</p> <p style="text-align: center;">-----</p> <p style="text-align: center;">Survey.</p> <p style="text-align: center;">-----</p> <p>From Cor. No. 1 (SW. cor.) of claim, hereinbefore described, N. 82° 5' E., on true line, on S. end line of claim, identical with N. end line of "Independence" claim.</p> <p>4.55 Intersect S.E.C. cor. of location, hereinbefore described. Continue line and measurement</p> <p>9.00 Intersect Cor. No. 2 of claim, identical with Cor. No. 4 of "Independence" claim, hereinbefore described. Thence N. 0° 23' E., on true line, on E. side line of claim. Bearing is computed to a point 4.55 chs. N. 82° 5' E. from N.E.C. cor. of location.</p> <p>22.73 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for Cor. No. 3 (NE. cor.) of claim, marked on brass cap,</p> <div style="text-align: center;"> <p style="text-align: center;">1925</p> </div> <p>Raise a mound of stone, 3 ft. base, 1½ ft. high, SW. of cor. NE. location cor. brs. N. 15° E., 2.09 chs. dist.</p> <p>From Cor. No. 3, S. 82° 5' W., on true line, on N. end line of claim.</p> <p>4.55 Intersect lode line at a point 2.22 chs. S. 0° 7' W. from</p>
---------	--

Segregation Survey of "2nd Independence" lode mining claim.

chains. N.E.C.cor.of location,hereinbefore described.
 Continue line and measurement.
 9.10 Set an iron post,3 ft.long,1 in.in diam.,26 ins.in ground,
 for Cor.No.4 (NW.cor.)of claim,marked on brass cap,



Raise a mound of stone,3 ft.base,1½ ft.high,SE.of cor.
 NW.location cor.bears N.12°30'W.,2.28 chs.dist.
 Reestablished ¼ sec.cor.of secs.4 & 5,hereinafter
 described,bears N.26°30'W.,13.90 chs.dist.

From Cor.No.4,
 S.0° 7'W.,(parallel to lode line),on true line,on W.side
 line of claim.

22.73 Intersect Cor.No.1 (SW.cor.) of claim,the place of
 beginning,hereinbefore described.

30 Segregation Survey of "3rd Independence" lode mining claim.

chains The following notes describe the survey of "3rd Independence" lode mining claim, for the purpose of segregating same from sections 4 & 9, T.13 N., R.1 E.

Retracement of Location.

The SW.location cor.of the claim is amount of stone, 3 ft.base, 1½ ft.high.

Thence

N.4°15'E., on true line, toward flag visible at NW.location cor.

22.73 Set temp. NW.cor.of claim.

23.64 Intersect NW.location cor., which is a mound of stone, 3 ft.base, 1½ ft.high.

True course & dist.of W.side line of location are therefore, N.4°15'E., 23.64 chs.

Thence

S.87° 6'E., toward flag visible at SE.location cor.of "Big Four" lode mining claim.

4.55 No trace of N.E.C.cor.of location can be found in this vicinity.

9.10 No trace of NE.location cor.can be found in this vicinity. Continue line and measurement and find no cors.

22.10 Intersect SE.location cor. of "Big Four"claim.

Thence

N.89°27'W., on true line, toward flag visible on temp.NW. cor.of "3rd Independence"claim,

9.10 Set temp.SW.cor.of "Big Four" and temp.SE.cor.of "English Coin"

13.65 Set temp.NE.cor.of "3rd Independence"claim.

18.20 Set temp.SW.cor.of "English Coin" claim.

22.07 Intersect temp.NW.cor.of "3rd Independence"claim.

From temp.NE.cor.of claim,

S.4°15'W., (parallel to W.side line of location) on random E.side line of location.

22.73 No trace of SE.location cor. can be found in this vicinity. Set temp.SE.cor.of claim.

Thence


N.89°27'W., on true line, toward flag visible at SW.cor.of location.

8.42 Intersect the SW.location cor.of claim.

Survey.

Reconstruct the SW.location cor. for Cor.No.1 of the claim as follows:

remove the mound of stone and in center of its position set an iron post, 3 ft.long, 1 in.in diam., 12 ins.in ground to bedrock, deposit a stone marked with a cross (X) at base of post and raise a mound of stone around post, for Cor.No.1 (SW.cor.) of "3rd Independence" claim, marked on brass cap,




1925

Thence

S.89°27'E., on true line, on S.end line of claim.

0.29 Intersect E.side line of "Independence"claim at a point 7.45 chs.S.10°24'E. from Cor.No.4 thereof.

9.10 Set an iron post, 3 ft.long, 1 in.in diam., 24 ins.in ground, for Cor.No.2 (SE.cor.) of claim, marked on brass cap,




1925

Segregation Survey of "3rd Independence" lode mining claim.

chains

Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, NW. of cor. Thence N. 2° 40' E., on true line, on E. side line of claim, toward flag visible on temp. NE. cor.

22.73 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for Cor. No. 3 (NE. cor.) of claim, marked on brass cap,



1925


Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, SW. of cor. Thence N. 89° 27' W., on true line, on N. end line of claim, identical with W. 1/2 of S. end line of "English Coin" claim.

4.55 Intersect temp. SW. cor. of "English Coin" claim. Leave S. end line of said claim.

Continue line and measurement

8.42 Intersect W. side line of location at a point 91 lks. S. 4° 15' W. from NW. location cor. of claim, hereinbefore described.

At point of intersection, set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground to bedrock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for Cor. No. 4 of claim (NW. cor.), marked on brass cap,



1925

Thence S. 4° 15' W., on true line, on W. side line of claim.

21.40 Intersect E. side line of "Independence" claim at a point 6.12 chs. S. 10° 24' E. from Cor. No. 4 (NE. cor.) thereof.

22.73 Intersect Cor. No. 1 (SW. cor.) of the claim, the place of beginning, hereinbefore described.

32 Segregation Survey of "English Coin" lode mining claim.

chains

The following notes describe the survey of the "English Coin" lode mining claim for the purpose of segregating same from section 4, T.13 N., R.1E.


Retracement of Location.

Retracement of S.end line of location was made in connection with survey of "3rd Independence" claim, as herein before described, and neither the SE. or SW. location cor. could be found.

- From temp. SE. cor. of claim,
N. 2° 40' E., on random E. side line of claim
- 22.73 No trace of NE. location cor. can be found. Set temp. cor.
Thence
N. 89° 27' W., on random N. end line of claim.
- 4.55 No trace of N. E. C. cor. can be found.
- 9.10 No trace of NW. location cor. can be found. Set temp. cor.
Thence
S. 2° 40' W., on true line, on W. side line of claim, toward
flag on temp. SW. cor.
- 22.73 Intersect temp. SW. cor. of claim, on N. end line of "3rd
Independence" claim.

Survey.


At temp. NW. cor. of claim, set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for Cor. No. 1 (NW. cor.) of claim, marked on brass cap,



1925

Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, SE. of cor.
Thence


- 22.73 S. 2° 40' W., on true line, on W. side line of claim.
Intersect N. end line of "3rd Independence" claim.
At this point of intersection, set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for Cor. No. 2 (SW. cor.) of claim, marked on brass cap,



1925

Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, NE. of cor.
Reestablished 1/4 sec. cor. of secs. 4 & 5 brs. N. 49° W.,
From Cor. No. 2,

- 4.55 S. 89° 27' E., on true line, on S. end line of claim and N. end
line of "3rd Independence" claim.
Intersect Cor. No. 3 (NE. cor.) of "3rd Independence".
Leave N. end line of said claim.
Continue line and measurement
- 9.10 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground,
for Cor. No. 3 (SE. cor.) of "English Coin" and Cor. No. 2
(SW. cor.) of "Big Four" claim, marked on brass cap,




1925

Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, N. 2° 40' E.
of cor.
Thence

Segregation Survey of "English Coin" lode mining claim.

chains N. 2°40'E., on true line, on E. side line of claim, identical with W. side line of "Big Four" claim.

22.73 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for Cor. No. 4 (NE. cor.) of "English Coin" and Cor. NO. 1 (NW. cor.) of "Big Four" claim, marked on brass cap,



Raise a mound of stone, 3 ft. base, 1½ ft. high, S. 2°40'W. of cor.

Thence

9.10 N. 89°27'W., on true line, on N. end line of claim. Intersect Cor. No. 1 (NW. cor.) of claim, hereinbefore described, from which the reestablished ¼ sec. cor. of secs. 4 & 5, hereinafter described, bears S. 80°22'W., 23.24 chs. dist.

34 Segregation Survey of "Big Four" lode mining claim.

chains

The following notes describe the survey of the "Big Four" lode mining claim for the purpose of segregating same from section 4, T.13 N., R.1 E.

Retracement of location.

Retracement of S. end line of location was made in connection with survey of "3rd Independence", and of W. side line in connection with survey of "English Coin" both as hereinbefore described.

Make retracement of E. side line and N. end line of claim. The only location cor. found by these retracements was the SE. cor.

The W. side line of "Big Four" and E. side line of "English Coin" are identical, and the E. side line of "Big Four" is parallel to its W. side line, according to testimony of the owner of both claims, Chas. G. Mackling.

Survey.


From Cor. No. 1 of the claim, identical with Cor. No. 4 (NE. cor.) of "English Coin", hereinbefore described, S. 2° 40' W., on true line, on W. side line of claim, identical with E. side line of "English Coin".

22.73 Intersect Cor. No. 2 (SW. cor.) of claim, identical with Cor. No. 3 (SE. cor.) of "English Coin", hereinbefore described, from which, $\frac{1}{4}$ sec. cor. of secs. 4 & 5 brs. N. 58° 23' W., Thence 36.17 chs. dist.

9.10 S. 89° 27' E., on true line, on S. end line of claim.

Intersect SE. location cor., which is a mound of stone, 4 ft. base, 1½ ft. high.


Reconstruct this cor. monument as follows: remove the mound of stone and in center of its position set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for Cor. No. 3 (SE. cor.) of claim, marked on brass cap



1925

Raise a mound of stone, 3 ft. base, 1½ ft. high, NW. of cor. Thence

22.73 N. 2° 40' E., on true line, on E. side line of claim. Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for Cor. No. 4 (NE. cor.) of claim, marked on brass cap,



1925

Raise a mound of stone, 3 ft. base, 1½ ft. high, SW. of cor. Thence

9.10 N. 89° 27' W., on true line, on N. end line of claim. Intersect Cor. No. 1 (NW. cor.) identical with Cor. No. 4 (NE. cor.) of "English Coin", hereinbefore described.

chains


The following notes describe the survey of the "Australian Mine" lode mining claim, for the purpose of segregating same from section 4, T.13 N., R1 E.

Retracement of Location.

Make retracement of the location and the only location cors. found were the East and West center cors. on the end lines of the location. The bearing and dist. between these cors. are N.69°56'W., 24.95 chs. The North and South side lines of the claim are parallel to the lode line, and the length of the claim originates with the East end center cor., according to testimony of Chas. G. Mackling, owner of the claim, therefore in the survey described in the following notes, the side lines are each N.69°56'W., 22.73 chs., the end lines at right angles thereto, and the NE. and SE. cors. of the claim are established equidistant from the East end center cor. of the location.

Survey.

The E.E.C. cor. of location is a mound of stone, 3 ft. base, 1 1/2 ft. high. Establish Cor. No. 1 (SE. cor.) of claim at 4.55 chs. S. 20° 4' W. from the E.E.C. cor. as follows: set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for Cor. No. 1 (SE. cor.) of claim, marked on brass cap,




Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, NW. of cor. The reestablished 1/4 sec. cor. of secs. 4 & 9, hereinafter described, bears S. 82° 53' W., 5.56 chs. dist. From Cor. No. 1,

4.55

N. 20° 4' E., on true line, on E. end line of claim. Intersect E.E.C. cor. of location. Continue line and measurement.

9.10


Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for Cor. No. 2 (NE. cor.) of claim, marked on brass cap,



Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, SW. of cor. Thence N. 69° 56' W., on true line, on N. side line of claim.

22.73

Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for Cor. No. 3 (NW. cor.) of claim, marked on brass cap,




Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, SE. of cor. Thence S. 20° 4' W., on true line, on W. end line of claim.

2.61

Intersect E. side line of "3rd Independence" claim at a point 6.78 chs. S. 2° 40' W. from Cor. No. 3 (NE. cor.) thereof. Continue line and measurement.

chains

- 4.55 Intersect lode line at 2.22 chs. S. $69^{\circ}56'E.$ from W.E.C. cor. of location, which is a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high.
- 9.10 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for Cor. No. 4 (SW. cor.) of claim, marked on brass cap,



- Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, NE. of cor. Thence S. $69^{\circ}56'E.$, on true line, on S. side line of claim.
- 2.00 Intersect E. side line of "3rd Independence" claim at a point 9.01 chs. N. $2^{\circ}40'E.$ from Cor. No. 2 (SE. cor.) thereof.
- Continue line and measurement.
- 22.73 Intersect Cor. No. 1 (SE. cor.) of claim, hereinbefore described, the place of beginning.
-

Segregation Survey of "Buckeye" lode mining claim.

chains

The following notes describe the survey of the "Buckeye" lode mining claim for the purpose of segregating same from section 4, T.13 N., R.1 E.


Retracement of Location.

Retraced the location and found only one location cor., The NE.cor. According to the testimony of Chas.G.Mackling owner of the claim, the W. 1/2 of S.end line is identical with N.side line of "Australian Mine" claim and the E. and W.side lines of the claim parallel the lode line equidistant therefrom.

In the survey described in the following notes the E. 1/2 of S.end line of the claim is an extension of the N.side line of "Australian Mine" a distance of 4.55 chs. to SE.cor.of claim,which then determines the bearing of the E. and W.side lines of the claim.


Survey.

At a point on N.side line of "Australian Mine" claim 4.55 chs.N.69°56'W. from Cor.No.2 (NE.cor.) thereof, establish Cor.No.1 of "Buckeye"claim as follows: set an iron post,3 ft.long,1 in.in diam.,24 ins.in the ground,for Cor.No.1 (SW.cor.)of claim, and for Cor.No.1(SE.cor.)of "Keystone"claim,marked on brass cap,




Raise a mound of stone,3 ft.base,1 1/2 ft.high,N.21°23'E. of cor.
Thence S.69°56'E.,on true line,on S.end line of claim,identical with N.side line of "Australian Mine".
4.55 Intersect Cor.No.2 (NE.cor.)of "Australian Mine",hereinbefore described.

Continue line and measurement. Leave N.side line of "Australian Mine".
9.10 Set an iron post,3 ft.long,1 in.in diam.,24 ins.in ground, for Cor.No.2 (SE.cor.)of claim,marked on brass cap,



Raise a mound of stone,3 ft.base,1 1/2 ft.high,NW.of cor.
Thence N.21°23'E.,on true line,on E.side line of claim,toward flag visible on NE.location cor.
22.73 Set an iron post,3 ft.long,1 in.in diam.,24 ins.in ground, for Cor.No.3 (NE.cor.)of claim,marked on brass cap,




Raise a mound of stone,3 ft.base,1 1/2 ft.high,SW.of cor. NE.location cor. bears N.21°23'E., 10 lks.dist.,which is a mound of stone,3 ft.base,1 1/2 ft.high.
From Cor.No.3,

38 Segregation Survey of "Buckeye" lode mining claim.

chains

9.10

N. $69^{\circ}56'W.$, on true line, on N. end line of claim.
 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground
 for Cor. No. 4 (NW. cor.) of claim; for Cor. No. 2 (NE. cor.)
 of "Keystone" claim, and Cor. No. 1 (SE. cor.) of
 "Champagne" claim, marked on brass cap,



1925

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, SW. of cor.
 Reestablished $\frac{1}{4}$ sec. cor. of secs. 3 & 4, hereinafter
 described, bears N. $74^{\circ}43'E.$, 29.36 chs. dist.

From Cor. No. 4,

22.73

S. $21^{\circ}23'W.$, on true line, on W. side line of claim.
 Intersect Cor. No. 1 (SW. cor.) of claim, hereinbefore
 described, the place of beginning.

Segregation Survey of "Keystone" lode mining claim.

chains

The following notes describe the survey of the "Keystone lode mining claim for the purpose of segregating same from section 4, T.13 N., R.1 E.

Retracement of Location.

Make retracement of the location and find none of the location cors.

According to testimony of Chas.G. Mackling, owner of the claim, the same parallels the "Buckeye" on the East, and overlaps the "Big Four" on the West.

In the survey described in the following notes the E. side line is made identical with W. side line of "Buckeye" the W. side line is made parallel thereto, the S. end line is identical with N. side line of "Australian Mine", and the N. end line parallel thereto.


Survey.

From Cor.No.1 (SE.cor.) of claim, identical with Cor.No.1 (SW.cor.) of "Buckeye" hereinbefore described, N.21°23'E., on true line, on E. side line of claim, identical with W. side line of "Buckeye".

22.73 Intersect Cor.No.2 (NE.cor.) of claim, identical with Cor. No.4 (NW.cor.) of "Buckeye" and Cor.No.1 (SE.cor.) of "Champagne", hereinbefore described. Reestablished sec.cor. of secs.3 & 4, hereinafter described, bears N.74°43'E., 29.36 chs. dist.

From Cor.No.2, N.69°56'W., on true line, on N. end line of claim, identical with S. end line of "Champagne" claim.

9.10 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for Cor.No.3 (NW.cor.) of claim, identical with Cor.No.4 (SW.cor.) of "Champagne" claim, marked on brass cap,



Raise a mound of stone, 3 ft. base, 1½ ft. high, S.69°56'E. of cor.


Thence

S.21°23'W., on true line, on W. side line of claim.

9.43 Intersect E. side line of "Big Four" claim at a point 5.21 chs. N.2°40'E., from Cor.No.3 (SE.cor.) thereof. Continue line and measurement.

15.03 Intersect S. end line of "Big Four" claim at a point 1.80 chs. N.89°27'W. from Cor.No.3 (SE.cor.) thereof. Continue line and measurement.

22.73 Intersect N. side line of "Australian Mine" claim. At this point of intersection, set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for Cor.No.4 (SW.cor.) of claim, marked on brass cap,



Raise a mound of stone, 3 ft. base, 1½ ft. high, NE. of cor.

Thence

S.69°56'E., on true line, on S. end line of claim, identical with N. side line of "Australian Mine" claim.

9.10 Intersect Cor.No.1 (SE.cor.) of claim, identical with Cor. No.1 (SW.cor.) of "Buckeye" claim, hereinbefore described.

chains

The following notes described the survey of "Champagne" lode mining claim for the purpose of segregating same from section 4, T.13 N., R.1 E.

Retracement of Location.

Retraced the location and found only the NE. and NW. location cors.

According to testimony of Chas.G.Mackling owner of the claim, the S.end line is identical with N.end line of "Keystone" claim.


In the survey of the claim described in the following notes, the W.side line is surveyed on a direct bearing between the NW.cor.of "Keystone" claim and the NW.location cor., and the E.side line is surveyed on direct bearing bet.NE.cor.of "Keystone" and NE.location cor.

Survey.

From Cor.No.1 (SE.cor.) of claim, identical with Cor.No.4 (NW.cor.) of "Buckeye" and Cor.No.2 (NE.cor.) of "Keystone", hereinbefore described,

N.5°40'E., on true line, on E.side line of claim, toward flag visible on NE.location cor.

22.73 Set an iron post, 3 ft.long, 1 in.in diam., 24 ins.in ground for Cor.No.2 (NE.cor.) of claim, marked on brass cap,



1925


Raise a mound of stone, 3 ft.base, 1½ ft.high, SW.of cor. Reestablished ¼ sec.cor.of secs.3 & 4, hereinafter described, bears S.60°25'E., 30.05 chs.dist.

The NE.location cor. which is a mound of stone, 3 ft. base, 2 ft.high, bears N.5°40'E., 5.19 chs.dist.

From Cor.No.2,

N.69°56'W., on true line, on N.end line of claim.

9.10 Set an iron post, 3 ft.long, 1 in.in diam., 24 ins.in ground, for Cor.No.3 (NW.cor.) of claim, marked on brass cap,



1925

Raise a mound of stone, 3 ft.base, 1½ ft.high, SE.of cor.

The NW.location cor.which is a mound of stone, 3 ft. base, 2 ft.high, bears N.5°40'E., 1.33 chs.dist.

From Cor.No.3,

S.5°40'W., on true line, on W.side line of claim.

22.73 Intersect Cor.No.4 (SW.cor.) of claim, identical with Cor. No.3 (NW.cor.) of "Keystone" claim, hereinbefore described.

Thence

S.69°56'E., on true line, on S.end line of claim, identical with N.end line of "Keystone" claim.

9.10 Intersect Cor.No.1 (SE.cor.) of claim, identical with Cor. No.2 (NE.cor.) of "Keystone" claim and Cor.No.4 (NW.cor.) of "Buckeye" claim, hereinbefore described.

Reestablished ¼ sec.cor.of secs.3 & 4, hereinafter described, bears N.74°43'E., 29.36 chs.dist.

Segregation Survey of "Stambo King" lode mining claim.

chains

The following notes describe the survey of the "Stambo King" lode mining claim for the purpose of segregating same from section 10, T.13 N., R.1 E.


Retracement of Location.

- 7.98 From NE.location cor.,hereinafter described, N.55° 6'W.,on true line,on N.end line of location,toward flag visible on NW.location cor. Intersect NW.location cor.hereinafter described. True course & dist.of N.end line of location are therefore, N55° 6'W.,7.98 chs.
- 23.69 Thence S.25°45'W.,on true line,on W.side line of location,toward flag visible on SW.location cor. Intersect SW.location cor.,which is a mound of stone,3 ft. base, 2 ft.high. True course & dist.of W.side line of location are therefore, S.25°45'W.,23.69 chs.
- 7.00 Thence N.71°00'E.,on true line,on W.1/2 of S.end line of location, toward flag visible on S.E.C.cor. Intersect S.E.C.cor.of location,which is a mound of stone, 3 ft.base,1 1/2 ft.high. True course & dist.of W.1/2 of S.endline of location are therefore, N.71°00'E.,7.00 chs.
- 6.85 Thence S.62°40'E.,on true line,on E.1/2 of S.end line of location, toward flag visible on SE.location cor. Intersect SE.location cor.,which is a mound of stone,3 ft.base,1 1/2 ft.high. True course & dist.of E.1/2 of S.end line of location are therefore, S.62°40'E.,6.85 chs.
- 18.32 Thence N.13°45'E.,on true line,on E.side line of location,toward flag visible on NE.location cor. Intersect NE.location cor.,the place of beginning. True course & dist.of E.side line of location are therefore, N.13°45'E., 18.32 chs.

Survey.

As practically all of the improvements on this claim seem to be on the northern portion,adjust the survey to retain the NE. and NW. location cors. and N.end line of location,and confine the other lines of the claim within the boundaries of the location.

The NE.location cor.is a mound of stone,3 ft.base, 1 1/2 ft. high. Reconstruct this cor.monument as follows: remove the mound of stone and in center of its position, set an iron post,3 ft.long,1 in.in diam.,16 ins.in ground to bedrock,deposit a stone marked with a cross(X)at base of post,and raise a mound of stone around post,for Cor. No.1 of claim,marked on brass cap,




- 3.99 From this cor. the reestablished 1/4 sec.cor.of secs. 3 & 10,hereinafter described,bears N.24°17'E.,20.15 chs. dist.
- 7.98 From Cor.No.1,described above, N.55° 6'W.,on true line,on N.end line of claim. (Midpoint) Set temp. N.E.C. cor. Intersect NW.location cor.,which is a mound of stone, 3 ft.base,2 ft.high. Reconstruct this cor.monument as follows:

42 Segregation Survey of "Stambo King" lode mining claim.


chains

remove the mound of stone and in center of its position set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for Cor. No. 2 (NW. cor.) of claim, marked on brass cap,



17.65

Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, SE. of cor. Thence S. 24° 52' W., on true line, on W. side line of claim. Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for Cor. No. 3 (SW. cor.) of claim, marked on brass cap,




4.55

Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, NE. of cor. Thence S. 55° 6' E., on true line, on S. end line of claim. Intersect lode line of claim at a point 65 lks. N. 22° 43' E. from S. E. C. cor. of location. Flag on temp. N. E. C. cor. is visible and brs. N. 22° 43' E. Continue line and measurement.

9.10

Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for Cor. No. 4 (SE. cor.) of claim, marked on brass cap



17.92

Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, NW. of cor. Reestablished 1/4 sec. cor. of secs. 10 & 11, hereinafter described, bears S. 84° 40' E., 55.83 chs. dist. Thence N. 21° 00' E., on true line, on E. side line of claim. intersect Cor. No. 1 (NE. cor.) of claim, the place of beginning, hereinbefore described.

For
Copies of LOCATION NOTICES of

INDEPENDENCE
2nd INDEPENDENCE
3rd INDEPENDENCE
ENGLISH COIN
BIG FOUR
AUSTRALIAN MINE
BUCKEYE
KEYSTONE
CHAMPAGNE
and
STAMBO KING

Lode Mining Claims

See pages 87 to 110 in back of this book.

chains

The subdivision lines of the N. 4 tiers of secs. of T.13 N., R.1 E., with the exception of line bet. secs. 23 & 26, E. 1/2 bet. secs. 22 & 27, and S. 1/2 bet. secs. 22 & 23, were surveyed in 1871 by SWW. Foreman, U.S.D.S.

Part of the sub. lines in the E. 1/2 of the Tp. were re-traced in 1918 by W.B. Kimmel and H.L. Baldwin, U.S. Surveyors in connection with survey of Placer Addition to Humboldt Townsite in sec. 14, but they did not reconstruct or reestablish any of the sec. or 1/4 sec. cors.

No other retracement or resurvey of subdivision lines of this tp. is of record.

The following notes describe a resurvey of all of the surveyed subdivision lines of this tp.

The reestablished cor. of secs. 24 & 25, on E. bdy. of Tpp, is an iron post, 2 ins. diam., projecting 12 ins. above ground, firmly set, properly mkd. on brass cap and witnessed by a mound of stone W. of cor. No bearing trees.

Thence

West, on random line, bet. secs. 24 & 25.

80.00 Set temp. cor. of secs. 23, 24, 25 & 26 (A)

From reestablished cor. of secs. 13, 14, 23 & 24

South, on random line, bet. secs. 23 & 24.

80.00 Set temp. cor. of secs. 23, 24, 25 & 26 (B)

80.32 Fall 86 lks. E. of temp. cor. (A) of same secs.

The point for reestablishment of missing cor. of secs. 23, 24, 25 & 26 is therefore 32 lks. N. of temp. cor. (A) and 86 lks. W. of temp. cor. (B) of said secs.

The true course & dist. of line bet. secs. 24 & 25 are therefore, N. 89° 46' W., 80.00 chs. and of line bet. secs. 23 & 24 are N. 0° 37' E., 80.00 chs., preserving the record westing and northing, respectively, of said lines.

From reestablished cor. of secs. 24 & 25, on E. bdy. of Tp., hereinbefore described,

N. 89° 46' W., on true line, bet. secs. 24 & 25.

Over mountainous land, thru dense undergrowth.

Ascend 85 ft. over E. slope.

2.60 Ridge, bears N. and S.

Descend 180 ft. over NW. slope.

14.90 Wash, 20 lks. wide, course SW.

Descend 230 ft. over W. slope.

28.80 Wash, 20 lks. wide, course S.

Ascend 154 ft. over E. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground to bedrock, deposit a stone marked with a cross (X) at base of post, for reestablished 1/4 sec. cor. of secs. 24 and 25, marked on brass cap,

S 24

S 25

1925

No bearing trees available. Raise md. of stone around post.

Ascend 216 ft. over E. slope.

53.40 Ridge, bears NE. and SW.

Descend 210 ft. over NW. slope.

66.10 Head of wash, course NW.

Ascend 57 ft. over NE. slope.

71.70 Same ridge, bears NW. and SE.

Descend 70 ft. over SW. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in ground to bedrock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for reestablished cor. of secs. 23, 24, 25 & 26, marked on brass cap,

chains

T13N	R1E
S23	S24
S26	S25

1925

No bearing trees available.
 Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, sagebrush, broomweed, scrub oak, manzanita & cacti.

3.50
37.65
40.00

N.0°37'E., on true line, bet. secs. 23 & 24.
 Over mountainous & rolling land, thru dense undergrowth.
 Asc. 77 ft. over SW. slope.
 Ridge, brs. NW. & SE. Desc. 278 ft. over NE. slope.
 Wash, 20 lks. wide, course W. Asc. 55 ft. over S. slope.
 Point of spur, slopes W. Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground to bedrock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for reestablished 1/4 sec. cor. of secs. 23 & 24, marked on brass cap,

S23	S24
-----	-----

1925

40.30
45.40
59.80
64.10
67.50
75.20
79.40
80.00

Desc. 15 ft. over NW. slope.
 Wash, 10 lks. wide, course SW. Asc. 70 ft. over S. slope.
 Spur, slopes W. Desc. 56 ft. over N. slope.
 Fence cor. from which fences extend W. & N. Thence along W. side of fence.
 Wash, 20 lks. wide, course W. Asc. 60 ft. over S. slope.
 Point of spur, slopes W. Desc. 109 ft. over NW. slope.
 Wash, 20 lks. wide, course SW. Asc. 69 ft. over S. slope
 Fence, brs. E. & W. Fence cor. brs. E. about 30 lks. dist., from which fences extend W., N., S., & E.
 Spur, slopes W. Point for sec. cor. determined by single proportion and record ~~as illustrated on diagram accompanying these notes~~ set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for reestablished cor. of secs. 13, 14, 23 & 24, marked on brass cap,

T13N	R1E
S14	S13
S23	S24

1925

Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.
 Land, mountainous & rolling.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scrub oak, manzanita sagebrush & cacti.

7.00
16.30
24.35
28.75

The reestablished cor. of secs. 13 & 24 on E. bdy. of Tp., is an iron post, 2 ins. in diam., projecting 12 ins. above ground, firmly set, properly mkd. on brass cap, and witnessed by a mound of stone W. of cor.
 Thence,
 N.89°46'W., on true line, bet. secs. 13 & 24.
 Over rolling & mountainous land, thru dense undergrowth.
 Desc. 50 ft. over NW. slope.
 Wash, 20 lks. wide, course NW. Asc. 73 ft. over NE. slope.
 Spur, slopes NW. Desc. 50 ft. over SW. slope.
 Wash, 20 lks. wide, course NW. Fence cor. brs. N. 45 lks. dist., from which fences extend N. & S. 85°W.
 Asc. 53 ft. over NE. slope.
 Fence, brs. N.85°E. & S.85°W.

chains	
33.00	Spur, slopes NW. Desc. 57 ft. over SW. slope to
39.68	Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 13 & 24, marked on brass cap,
	S13
	S24
	1925
	Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor. On an outcropping ledge, about 7 ft. high \approx 18 ft. long, bearing S. 9° E., 27 lks. dist., cut a cross (X) and $\frac{1}{4}$ S24 BO.
	Desc. slightly over SW. slope.
40.00	Wash, 20 lks. wide, course NW. Asc. over N. slope.
45.30	Wash, 20 lks. wide, course N. Heads about 3 chs. S.
49.65	Old road, brs. NW. & SE.
62.30	Spur, slopes W. from SE. Desc. 66 ft. along top of spur.
79.10	Fence, brs. N. & S.
79.36	Intersect the cor. of secs. 13, 14, 23 & 24.
	Land, rolling & mountainous.
	Soil, rocky, 4th rate.
	Timber, none.
	Undergrowth, scrub oak, thornbush, manzanita & cacti.

	N. 0° 8' E., on true line, bet. secs. 13 & 14.
	Over rolling land, thru dense undergrowth.
	Desc. 83 ft. over NW. slope.
17.50	Wash, 20 lks. wide, course W. Enter scattering undergrowth. Asc. 32 ft. over S. slope.
19.65	Fence cor. from which fences extend W. & S.
20.00	Spur, slopes W. Desc. 40 ft. over N. slope.
28.50	Wash, 15 lks. wide, course W. from S. 70° E. Asc. 39 ft. over S. slope.
30.00	Spur, slopes W. Desc. 23 ft. over N. slope.
34.30	Wash, 10 lks. wide, course NW. Asc. 14 ft. over SW. slope.
39.90	Point of spur, slopes W. Desc. gradually over NW. slope.
39.96	Fence, brs. E. & W.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 13 & 14, marked on brass cap,
	S14 S13
	1925
	Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. Desc. 26 ft. over NW. slope.
40.40	Fence, brs. E. & W.
42.50	S. edge of shallow wash, brs. N. 80° E. & S. 80° W. Thence across wash, course S. 80° W.
49.00	N. edge of wash, brs. N. 80° E. & S. 80° W. Leave wash. Asc. 33 ft. over S. slope.
59.00	Spur, slopes W. Desc. 70 ft. over N. slope.
63.70	Wash, 30 lks. wide, course S. 80° W. Asc. 63 ft. over S. slope.
71.00	Spur, slopes W. Desc. 46 ft. over N. slope.
79.00	S. edge of wash brs. NE. & SW. Thence across wash, course SW.
80.00	N. edge of wash, brs. NE. & SW. Point for sec. cor. determined by single proportion and record as illustrated on diagram accompanying these notes , falls in unsafe place to set monument, therefore at a point 25 lks. N. 0° 43' E., establish a witness cor. as follows: set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for witness cor. to reestablished cor. of secs. 11, 12, 13 & 14, marked on brass cap,

chains

T13N R1E	
S11	S12
S14	S13
W C	
1925	

from which,
 an oak, 4 ins.in diam., brs. N.51 $\frac{3}{4}$ °E., 294 lks.dist.,
 marked WC BT
 an oak, 4 ins.in diam., brs. S.89°E., 354 lks.dist.,
 marked WC BT
 an oak, 4 ins.in diam., brs. N.42°W., 425 lks.dist.,
 marked WC BT
 Raise a mound of stone, 3 ft.base, 1 $\frac{1}{2}$ ft.high, W.of cor.

Land, rolling.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scrub oak, thornbush & cacti.

The reestablished cor.of secs.12 & 13 on E.bdy.of Tp.,
 is an iron post, 2 ins.in diam., projecting 12 ins.above
 ground, firmly set, properly marked on brass cap & wit-
 nessed by a mound of stone W.of cor.

Thence,
 N.89°43'W., on true line, bet.secs.12 & 13.
 Over rolling land, thru dense undergrowth, along S.side of
 fence bearing E. & W. Desc.21 ft.over NW.slope.
 3.00 Wash, 10 lks.wide, course SW. Asc.34 ft.over SE.slope.
 6.90 Point of spur, slopes S. Desc.64 ft.over SW.slope.
 9.70 Wash, 10 lks.wide, course S. Desc.68 ft.over S. & SW.slopes.
 12.20 Fence cor.brs.N.about 60 lks.dist.from which fences extend
 E. & N.
 14.00 Bend in wash, 10 lks.wide, course SW.from SE. Desc.70 ft.
 over SW.slope.
 17.30 Fence cor.from which fences extend NE. & W. Thence along
 fence.
 18.65 Fence cor.from which fences extend E. & S.
 20.35 Center of wash, 250 lks.wide, course SW. Asc.35 ft.over SE.
 slope.
 30.20 Spur, slopes SW. Descend 20 ft.over W.slope.
 33.50 Draw, course SW. Asc. 15 ft.over SE.slope.
 36.70 Spur, slopes SW. Desc.10 ft.over W.slope.
 39.00 Draw, course SW. Asc.slightly over SE.slope to
 39.54 Set an iron post, 3 ft.long, 1 in.in diam., 24 ins.in ground,
 for reestablished $\frac{1}{4}$ sec.cor.of secs.12 & 13, marked on
 brass cap,

S12	
$\frac{1}{4}$	S13
1925	

Raise a mound of stone, 3 ft.base, 1 $\frac{1}{2}$ ft.high, N.of cor.
 U.S.Geological Survey Bench Mark (A) in Frac.T.13N., R.
 1 $\frac{1}{2}$ E., brs. N.71°57'E.
 U.S.G.S. B.M. (B) in T.13 N., R.1 E., brs. S.14 $\frac{3}{4}$ °E.
 Other bearings to these B.M.s described at the $\frac{1}{4}$ sec.
 cor.of secs.14 & 15.

Asc.slightly over SE.slope.
 40.75 Spur, slopes SW.Desc.133 ft.over NW.slope.
 74.20 Wash, 100 lks.wide, course S.85°W. Desc.gradually over S.
 slope to
 79.08 Intersect true point for.cor.of secs.11, 12, 13 & 14.
 Land, rolling.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scrub oak, thornbush, sagebrush & cacti.

From true point for cor.of secs.11, 12, 13 & 14,
 N.0°43'E., on true line, bet.secs.11 & 12.
 Over rolling land, thru dense undergrowth. Asc.68 ft.over
 S.slope.

chains.
 0.25 Intersect W.C. to reestab. cor. of secs. 11, 12, 13 & 14.
 5.30 Spur, slopes SW. Desc. 54 ft. over NW. slope.
 12.90 Wash, 20 lks. wide, course SW. Asc. 35 ft. over SE. slope.
 20.00 Spur, slopes SW. Desc. 74 ft. over NW. slope.
 26.30 Wash, 30 lks. wide, course SW. Asc. 29 ft. over S. slope.
 30.00 Spur, slopes W. Desc. 38 ft. over N. slope.
 36.30 Wash, 30 lks. wide, course SW. Asc. gradual S. slope
 37.70 Power line brs. N. 20° E. & S. 20° W.
 39.30 Spur, slopes SW. Desc. 10 ft. over NW. slope to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground,
 for reestablished $\frac{1}{4}$ sec. cor. of secs. 11 & 12, marked on
 brass cap,

$\frac{1}{4}$
 S11 | S12
 1925

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Desc. 25 ft. over NW. slope.
 41.90 Wash, 30 lks. wide, course SW. Asc. gradually over SW. slope.
 42.80 Telephone line, brs. N. 20° E. & S. 20° W.
 43.60 Wash, 30 lks. wide, course SW. Asc. 40 ft. over SE. slope.
 50.80 Spur, slopes SW. Desc. gradually over NW. slope.
 55.00 Wash, 10 lks. wide, course SW. Asc. gradually over SW. slope
 to sec. cor.
 57.30 Road, brs. NE. & SW.
 59.80 Fence, brs. E. & W.
 60.10 Wash, 10 lks. wide, course SW.
 79.00 Wash, 60 lks. wide, course SW.
 80.00 Intersect original cor. of secs. 1, 2, 11 & 12, which is a
 granite stone, 10x10x14 ins. above ground, firmly set,
 marked with 5 grooves on S. face and 1 groove on E. face.
 No accessories.
 Reconstruct this cor. monument as follows: alongside
 old cor. stone, set an iron post, 3 ft. long, 2 ins. in diam.,
 24 ins. in ground, for cor. of secs. 1, 2, 11 & 12, marked
 on brass cap,

T13N R1E
 S2 | S1
 S11 | S12
 1925

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Land, rolling.
 Soil, rocky, 3rd rate.
 Timber, none.
 Undergrowth, sagebrush, scrub oak, thornbush & cacti.

The reestablished cor. of secs. 1 & 12 on the E. bdy. of the
 Tp. is an iron post, 2 ins. in diam., projecting 12 ins.
 above ground, firmly set, properly marked on brass cap,
 and witnessed by a mound of stone W. of cor.

Thence,
 N. 89° 30' W., on true line, bet. secs. 1 & 12.
 Over rolling land, thru dense undergrowth.
 Desc. 10 ft. over W. slope.

1.50 Wash, 10 lks. wide, course SW. Asc. 45 ft. over SE. slope.
 6.60 Spur, slopes S. Desc. 133 ft. over SW. slope.
 20.70 Wash, 10 lks. wide, course NW. Asc. gradually over NE. slope.
 23.50 Point of spur, slopes NW. Desc. 52 ft. over W. slope.
 37.80 Wash, 50 lks. wide, course SW. Asc. gradually over SE. slope.
 38.10 Fence, brs. N. & S.
 39.04 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the
 ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 1 & 12,
 marked on brass cap,

chains

1/4
S1
S12
1925

from which
 A scrub oak, 5 ins. in diam., brs. S. 22° E., 119 lks. dist.,
 marked 1/4 S12 BT
 No other bearing tree available.
 Raise a mound of stone, 3 ft. base and 1 1/2 ft. high, N. of cor.
 Asc. gradually over SE. slope, thru scattering undergrowth.
 49.20 Low ridge, brs. NE. & SW. Desc. 50 ft. over general NW. slope.
 60.90 Road, brs. NE. & SW.
 62.50 Power line, brs. N. 20° E. & S. 20° W.
 63.50 Thence along S. edge of wash, course W. from NE.
 64.00 Telephone line, brs. N. 20° E. & S. 20° W.
 67.90 Leave wash, course SW. from E. Enter level land.
 77.00 Wash, 100 lks. wide, course SW. Enter gently rolling land.
 78.08 Intersect the cor. of secs. 1, 2, 11 & 12.

Land, rolling and level.
 Soil, rocky, 3rd rate.
 Timber, none.
 Undergrowth, sagebrush, scrub oak, thornbrush & cacti.

From cor. of secs. 1, 2, 35 & 36, on N. bdy. of Tp., hereinbefore
 described,
 S. 0° 10' E., on true line, bet. secs. 1 & 2 (N. 1/2)
 Over gently rolling land, thru scattering undergrowth.
 20.30 Mound of stone on line.
 24.30 Wash, 20 lks. wide, 20 ft. deep, course SW.
 25.40 Wash, 60 lks. wide, 25 ft. deep, course SW. Enter level land.
 40.23 Intersect original 1/4 sec. cor. of secs. 1 & 2, which is a
 granite stone, 12x14x10 ins. above ground, firmly set,
 and marked 1/4 on W. face. No accessories.
 Reconstruct this cor. monument as follows:
 alongside old stone, set an iron post, 3 ft. long, 1 in.
 in diam., 24 ins. in ground, for 1/4 sec. cor. of secs. 1 &
 2, marked on brass cap

1/4
S2 | S1
1925


Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.
 House of Jackson Henderson, brs. S. 50° 40' W.
 Stub of an old fence line extends N. & W. from this cor.
 Thence
 S. 0° 7' E., on true line, bet. secs. 1 & 2 (S. 1/2)
 Over level land, thru scattering undergrowth.
 8.60 Wash, 40 lks. wide, 7 ft. deep, course SW.
 11.60 Leave level & enter gently rolling land. Asc. 23 ft. over
 NW. slope
 16.50 Low ridge, brs. NE. & SW. Desc. gradually over SE. slope.
 16.60 County highway, brs. N. 50° E. & S. 50° W.
 36.60 Wash, 15 lks. wide, 8 ft. deep, course SW.
 40.00 Intersect the cor. of secs. 1, 2, 11 & 12.

Land, gently rolling and level.
 Soil, rocky, 3rd rate on slopes; sandy, 2nd rate on level.
 Timber, none.
 Undergrowth, sagebrush, scrub oak, thornbrush & cacti.

From cor. of secs. 13, 14, 23 & 24,
 S. 89° 48' W., on true line, bet. secs. 14 & 23 (E. 1/2)
 Over rolling land, thru scattering undergrowth.
 Descend 93 ft. over W. slope.
 14.00 Foot of descent. Thence over level land.
 14.06 Fence, brs. NW. & SE. Turns to W. at about 5 chs. SE.

50 Resurvey of Part of the Subdivision Lines of T.13 N., R.1 E.


chains
 27.25 Power line, brs. N.10°E. & S.10°W.
 28.25 Telephone line, brs.N.10°E. & S.10°W.
 30.26 Fence, brs. N. & S.
 39.66 Fence, brs.N. & S., under which intersect $\frac{1}{4}$ sec.cor.of secs. 14 & 23, reconstructed by Consolidated Arizona Smelting Co., which is a lava stone exposed 6x12x16 ins. above a mound of stone in which it is firmly set and over which cement has been poured making a solid mass. Stone is marked $\frac{1}{4}$ on N. face. No accessories.
 Reconstruct this cor.monument as follows:
 alongside the mound, set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for $\frac{1}{4}$ sec.cor.of secs.14 & 23, marked on brass cap




Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
 New smokestack of Humboldt Smelter, brs.S.68 $\frac{1}{2}$ °W.
 Old smokestack of Humboldt Smelter, brs.S.86°W.
 Con.Ariz.Co's.office, brs.S.65°W.

From $\frac{1}{4}$ sec.cor.,
 N.89°57'W., on true line, bet.secs.14 & 23(W. $\frac{1}{4}$).
 Over level land, thru scattering undergrowth.
 To avoid obstructions on line the measurement to sec.
 cor.is accomplished by traverse thru sec.14 as follows:


From $\frac{1}{4}$ sec.cor.,
 N.57°21'W., 11.945 chs.to traverse angle point.
 2.95 chs. Leave level land and desc.75 ft.over rimrock, bearing NE.& SW.
 5.00 " Agua Fria River, 100 lks. wide, course SW.
 5.15 " Flume, 4 ft.wide, course SW.Asc.70 ft.over slag dump to traverse angle point.

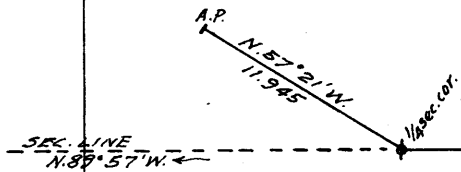

Thence
 S.81°21'W., 25.22 chs.to traverse angle point.
 10.035 chs. A point 37 lks.N.0°7'E. from an iron pipe filled with cement, set by Con. Ariz.Smelting Co.as W.C. to S. $\frac{1}{6}$ sec.cor.of sec.14, 300 ft.N.0°7'E.therefrom.
 23.12 " Railroad spur, brs.NW.& SE.
 23.62 " R. R. siding, brs.NW.& SE.

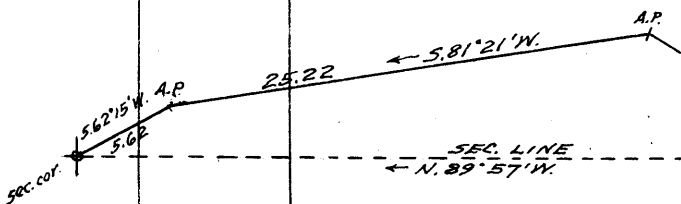

From traverse angle point,
 S.62°15'W., 5.62 chs. to
 39.96 Intersect the cor.of secs.14, 15, 22 & 23, reconstructed by Con.Ariz.Smelting Co., which is a 4 in.iron pipe, filled with cement, projecting 3 ft.above ground, firmly set in ground and mound of stone, over which cement has been poured, making a solid mass. No accessories.
 Reconstruct this cor.monument as follows:
 alongside the mound, set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for cor.of secs.14, 15, 22 & 23, marked on brass cap



Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
 Land, rolling and level.
 Soil, rocky, 3rd and 4th rate.
 Timber, none.
 Undergrowth, sagebrush, greasewood and cacti.

chains S.0° 8'W., on true line, bet. secs. 22 & 23 (N. $\frac{1}{4}$)
 Over rolling land, thru scattering undergrowth.
 Desc. gradually over S. slope.
 7.50 Wash, 100 lks. wide, course SE. Asc. 131 ft. over N. slope
 to $\frac{1}{4}$ sec. cor.
 8.20 Power line, brs. E. & W.
 14.80 Power line, brs. E. & W. Fence, brs. E. & W. At about 5 chs.
 E. the fence turns to SE. and at 50 lks. W. turns to SE.
 16.10 Same fence, brs. NW. & SE. At about 50 lks. SE. the fence
 turns to E.
 40.24 Intersect the $\frac{1}{4}$ sec. cor. of secs. 22 & 23, reconstructed by
 Con. Ariz. Smelting Co., which is an iron pipe filled
 with cement, firmly set in mound of stone over which
 cement has been poured making a solid mass. No access-
 ories.
 Reconstruct this cor. monument as follows:
 alongside the mound, set an iron post, 3 ft. long, 1 in. in
 diam., 24 ins. in ground, for $\frac{1}{4}$ sec. cor. of secs. 22 & 23,
 marked on brass cap




Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
 U.S. Geological Survey B.M. "A" brs. N. 55° 40' E.
 U.S. Geological Survey B.M. "B" brs. S. 83° 2' E.
 Old stack of Humboldt Smelter brs. N. 36° 35' E.
 New stack of Humboldt Smelter brs. N. 36 $\frac{3}{4}$ ° E.
 School house brs. N. 21° 35' W. about 25 chs. dist.
 Con. Ariz. Smelting Co. office brs. N. 48 $\frac{3}{4}$ ° E.

Land, rolling.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, greasewood, sagebrush and cacti.

From cor. of secs. 14, 15, 22 & 23,
 N. 0° 6' E., on true line, bet. secs. 14 & 15 (S. $\frac{1}{4}$)
 Over rolling land, thru scattering undergrowth.
 2.20 House on S. edge of town of Humboldt, brs. E. 40 lks. dist.
 2.94 Buildings on line beyond this point prevent continuation
 of survey on line, therefore obtain measurement to the
 $\frac{1}{4}$ sec. cor. by means of offset line in sec. 14 as follows:
 East, 4.60 chs. to offset angle point.

2.20
2.94



4.20 chs. Road to smelter, Brs. NW. & SE.
 4.60 " Offset angle point.
 Thence,
 North, 37.10 chs. to offset angle point.
 2.25 chs. R.R. siding, brs. NW. & SE. Enter
 Calumet St. of town of Humboldt,
 bearing N. & S. Thence along W.
 side of said street.
 6.22 " Street, brs. E. & W.
 8.02 " SE. cor. of Block, brs. W. 10 lks.
 dist.
 16.92 " County highway, brs. E. & W.
 20.39 " Street, brs. E. & W.
 37.10 " Offset angle point.
 Thence

West, 4.54 chs. to
 40.04 Intersect the $\frac{1}{4}$ sec. cor. of secs. 14 & 15, reconstructed by
 Con. Ariz. Smelting Co., which is an iron pipe filled with
 cement, projecting 4 ft. above ground, firmly set in a
 mound of stone over which cement has been poured making
 a solid mass. At 5 lks. NE. of pipe is a block of concrete
 18x18x18 ins.
 Reconstruct this cor. monument as follows:
 alongside the mound, set an iron post, 3 ft. long, 1 in. in

chains

diam., 24 ins. in ground, for $\frac{1}{4}$ sec. cor. of secs. 14 & 15, marked on brass cap

1/4
S15 S14
1925

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.U.S. Geological Survey B.M. "A" brs. N. $71\frac{1}{2}^{\circ}$ E.U.S. Geological Survey B.M. "B" brs. S. $57^{\circ}28'$ E.New stack of Humboldt smelter brs. S. $34\frac{1}{2}^{\circ}$ E.Old stack of Humboldt smelter brs. S. $57^{\circ}28'$ E.Barr's house brs. S. $66^{\circ}35'$ E., about 60 chs. dist.House brs. N. $53^{\circ}35'$ E., about 12 chs. dist.Felder's house brs. N. $42\frac{1}{2}^{\circ}$ E., about 70 chs. dist.Placer Addition to Humboldt Townsite is the S. $\frac{1}{2}$ of the NW. $\frac{1}{4}$ of the SW. $\frac{1}{4}$ of sec. 14, part of the S. $\frac{1}{2}$ of line bet. secs. 14 & 15 forming the W. bdy. thereof.

It was impracticable to obtain ties to the NW. and SW. cors. of said Placer Addition to Humboldt Townsite owing to graded streets, buildings and other improvements made since the survey in 1918 by W.B. Kimmel and H.L. Baldwin, U.S. Surveyors.

From $\frac{1}{4}$ sec. cor.,N. $0^{\circ}55'$ E., on true line, bet. secs. 14 & 15 (N. $\frac{1}{2}$)

Over rolling land, thru scattering undergrowth.

1.50 Fence cor. brs. E. 20 lks. dist. from which fences extend E. and NE.

2.53 Telephone line, brs. NE. & SW.

3.30 Railroad, brs. NE. & SW.

5.20 Junction of roads from N., SW. & NE.

5.40 Fence cor. from which fences extend N., NW. & SW.

8.40 SW. cor. of house brs. E. 45 lks. dist.

12.90 Fence cor. from which fences extend N., S. & E.

20.00 Fence cor. from which fences extend E., W. & S.

22.50 Wash, 10 lks. wide, course SE. Asc. 70 ft. over S. slope.

31.00 Spur, slopes E. Desc. 74 ft. over N. slope to sec. cor.

34.70 Fence, brs. E. & W.

40.19 Intersect original cor. of secs. 10, 11, 14 & 15, which is a granite stone, 8x10x14 ins. above ground, marked with 2 grooves on E. face and 4 grooves on S. face, firmly set in ground under a fence bearing E. & W. No accessories.

Reconstruct this cor. monument as follows:

alongside old cor. stone, set an iron post, 3 ft. long,

2 ins. in diam., 24 ins. in ground, for cor. of secs. 10, 11, 14 & 15, marked on brass cap

T13N R1E
S10 S11
S15 S14
1925

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.A house bears S. $64\frac{1}{2}^{\circ}$ E., about 18 chs. dist.

Land, rolling.

Soil, rocky, 4th rate.

Timber, none.

Undergrowth, greasewood and cacti.

From true point for cor. of secs. 11, 12, 13 & 14,

S. $89^{\circ}59'$ W., on true line, bet. secs. 11 & 14.

Over rolling land, thru scattering undergrowth.

Ascend 23 ft. over SE. slope.

7.80 Power line, brs. N. 20° E. & S. 20° W.9.25 Telephone line, brs. N. 20° E. & S. 20° W.

10.00 Spur, slopes S. Desc. 102 ft. over W. slope to Agua Fria River.

13.80 W.T. Felder's house brs. N. 6° W.

24.30 Road, brs. N. & SW.

29.30 Road, brs. S. & NE.

29.40 Fence, brs. N. & S.

Resurvey of Part of the Subdivision Lines of T.13 N., R.1 E.

chains
 30.00 Top of E. bank of Agua Fria River, brs. N. & S. Desc. 30 ft.
 30.50 Foot of bank. Thence across nearly level river bottom.
 37.00 Stream of water, 50 lks. wide, 3 ins. deep, course S. 20° E.
 37.80 Foot of W. bank of river, Asc. 30 ft. to
 38.50 Top of W. bank of Agua Fria River, brs. N. 10° W. & S. 10° E.
 Leave river and enter level field.
 39.54 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins.
 in ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 11 & 14,
 marked on brass cap

S 11
 $\frac{1}{4}$ —————
 S 14
 1925


from which
 a cottonwood, 48 ins. diam., brs. N. 55° W., 952 lks. dist.,
 marked $\frac{1}{4}$ S11 BT
 a cottonwood, 40 ins. diam., brs. S. 70° W., 780 lks. dist.,
 marked $\frac{1}{4}$ S14 BT
 Continue over level field.
 48.90 Enter wash, course SE. from W. Group of Con. Ariz. Smelting
 Co. buildings brs. N. about 5 chs. dist.
 Thence up wash, thru scattering cottonwood timber.
 52.30 Power line, brs. N. 20° W. & S. 40° E.
 56.70 Power line, brs. N. 20° W. & S. 20° E.
 58.00 Leave wash, course E. from SW.
 58.70 Fence, brs. N. 20° W. & S. 20° E.
 59.20 Telephone line, brs. N. 20° W. & S. 20° E.
 59.70 County highway, brs. N. 20° W. & S. 20° E. Ruins of early stage
 station brs. S. 68 $\frac{1}{2}$ ° E. about 7 chs. dist.
 60.30 Telephone line, brs. N. 20° W. & S. 20° E.
 60.70 NW. cor. of Con. Ariz. Smelting Co. dwelling brs. N. 51° 20' E.,
 about 10 chs. dist.
 Railroad track, brs. N 21° W. & S. 17° W.
 House brs. S. 8° W.
 61.40 Fence cor. brs. N. about 40 lks. dist., from which fences
 extend SW. & NW.
 64.20 Road, brs. NE. & SW.
 65.30 Fence, brs. N. & S. Fence cor. brs. N. about 2 chs. dist.,
 from which fences extend E., W., & S.
 Fence cor. brs. S. about 2 chs. dist., from which fences
 extend N. & SE.
 70.70 Wash, course SE.
 76.40 Fence cor. from which fences extend W. & SE. Thence along
 fence.
 79.08 Intersect cor. of secs. 10, 11, 14 & 15.
 Land, rolling and level.
 Soil, E. $\frac{1}{2}$ rocky, 3rd rate; W. $\frac{1}{2}$ sandy, 1st & 2nd rate.
 Timber, a few cottonwoods.
 Undergrowth, sagebrush, broomweed, greasewood & cacti.

N. 0° 23' W., on true line, bet. secs. 10 & 11.
 Over rolling land, thru scattering undergrowth.
 0.90 Wash, 40 lks. wide, course E.
 4.60 Fence, brs. E. & W. Enter cemetery.
 9.10 Fence, brs. E. & W. Leave cemetery.
 9.90 Road, brs. E. & W.
 13.10 Wash, 30 lks. wide, course SE.
 37.00 Telephone line, brs. N. 21° W. & S. 21° E.
 37.80 Fence, brs. N. 21° W. & S. 21° E.
 40.07 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24
 ins. in ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 10
 & 11, marked on brass cap

$\frac{1}{4}$
 S10 | S11
 1925

54 Resurvey of Part of the Subdivision Lines of T.13 N., R.1 E.


chains
 40.70 Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor. A.T. & S.F. R.R. (Prescott & Eastern division) brs. N. 21° W. & S. 21° E.
 43.80 County highway, brs. N. 21° W. & S. 21° E. House brs. E. about 2 chs. dist.
 47.10 Fence, brs. N. 21° W. & S. 21° E. Thence over level field.
 60.00 Fence, brs. E. & W.
 63.60 Fence, brs. E. & W.
 73.50 Fence, brs. E. & W.
 80.13 Point for sec. cor. determined by double proportion ~~as illustrated on diagram accompanying these notes.~~ Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for reestablished cor. of secs. 2, 3, 10 & 11, marked on brass cap



Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor. U.S. Geological Survey B.M. 4548 brs. S. 87° 35' W., 9.29 chs.

Land, rolling and level.
 Soil, rocky, 4th rate on slopes; sandy, black loam, 1st and 2nd rate on level.
 Timber, none.
 Undergrowth, scrub oak and cacti.

From cor. of secs. 1, 2, 11 & 12, N. 89° 30' W., on true line, bet. secs. 2 & 11 (E. ½)
 Over rolling land, thru scattering undergrowth.
 2.10 Wash, 20 lks. wide, course SW.
 13.00 Low spur, slopes SW. Desc. gradually over W. slope.
 16.65 Fence cor. brs. N. 29½° W. from which fences extend W. & S.
 20.00 Fence brs. N. & S.
 21.80 Shallow wash, 100 lks. wide, course SW.
 29.90 Wash, 30 lks. wide, course SW.
 30.50 Enter field, brs. N. & S.
 37.50 Wash, 50 lks. wide, 6 ft. deep, course SW.
 40.14 Intersect point of original location of the ¼ sec. cor. of secs. 2 & 11 as per testimony of Jackson Henderson, whose affidavit to such effect accompanies these notes. Restore the cor. monument at this point as follows: set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for ¼ sec. cor. of secs. 2 & 11, marked on brass cap



Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor. Thence, S. 89° 50' W., on true line, bet. secs. 2 & 11 (W. ½)
 Over level land, thru scattering undergrowth
 0.07 Fence cor. from which fences extend W., N. & S. Thence along fence.
 15.08 Fence cor. from which fences extend E. & N. Leave E. & W. fence.
 31.60 Top of E. bank of Agua Fria River, brs. N. & S. Descend 30 ft.
 33.00 Agua Fria River, with stream of water, 30 lks. wide, 4 ins. deep, course S. Ascend 30 ft. to
 35.00 Top of W. bank of Agua Fria River, brs. N. & S. Leave river.
 35.50 Enter cultivated field.
 40.62 Intersect the cor. of secs. 2, 3, 10 & 11.

Land, rolling and level.
 Soil, rocky, 3rd rate on slopes; black loam, 2nd rate on level.
 Timber, none.
 Undergrowth, greasewood, sagebrush and cacti.

Resurvey of Part of the Subdivision Lines of T.13 N., R.1 E.

chains From cor. of secs. 2, 3, 34 & 35, on N. bdy. of Tp., hereinbefore described,
 S. 0° 25' E., on true line, bet. secs. 2 & 3.
 Over nearly level land, thru scattering undergrowth.
 15.00 Leave nearly level and enter rolling land. Desc. 30 ft. to
 19.50 Wash, 20 lks. wide, course SW. Desc. 60 ft. over SW. slope.
 20.70 Fence, brs. E. & W. Fence cor. brs. W. about 5 chs. dist. from
 which fences extend E. & SE.
 23.55 Fence, brs. NW. & SE.
 25.50 Top of E. bank of Agua Fria River, brs. NW. & SE. Desc. 20 ft.
 25.75 Foot of bank. Thence across dry river bottom.
 40.27 (Proportional dist.) Point for reestablishment of the $\frac{1}{4}$
 sec. cor. is in river bottom, where it is impracticable
 to monument the cor., therefore establish witness cor.
 at 1.87 chs. S. 0° 25' E. herefrom.
 41.75 Foot of E. bank of river. Asc. 20 ft. to
 41.90 Top of E. bank of Agua Fria River, brs. E. & W. Leave river.
 Thence over level land.
 42.14 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground,
 for witness cor. to reestablished $\frac{1}{4}$ sec. cor. of secs. 2
 and 3, marked on brass cap

$\frac{1}{4}$
 W | C
 53 | 52
 1925

62.20 Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Top of East bank of Agua Fria River, brs. NW. & SE. Desc.
 20 ft.
 62.50 Foot of bank. Thence over river bottom.
 64.60 Dry channel of Agua Fria River, course SE.
 69.30 Foot of W. bank of river, Ascend 20 ft. to
 69.50 Top of W. bank of Agua Fria River, brs. NW. & SE. Leave
 river. Thence over level land.
 70.00 Fence, brs. E. & W.
 70.30 County highway, brs. E. & W. West end of bridge over
 Agua Fria River, bears E. 60 lks. dist.
 76.10 Wash, 40 lks. wide, 15 ft. deep, course E.
 79.90 Fence, brs. E. & W.
 80.33 Intersect the cor. of secs. 2, 3, 10 & 11.

Land, rolling and level.
 Soil, rocky, 4th rate in N. 20 chs.; elsewhere, sandy, 2nd rate.
 Timber, none.
 Undergrowth, greasewood, sagebrush and cacti.

From the S. $\frac{1}{4}$ sec. cor. of sec. 22, reestablished at midpoint
 of S. bdy. thereof as hereinafter described,
 N. 89° 40' W., on true line, on S. bdy. of sec. 22 (W. $\frac{1}{4}$)
 Over rolling land, thru scattering undergrowth.
 Desc. 27 ft. over W. slope to
 1.63 (Midpoint of N. bdy. of sec. 27) Set an iron post, 3 ft. long,
 1 in. in diam., 27 ins. in ground, for reestablished N.
 $\frac{1}{4}$ sec. cor. of sec. 27, marked on brass cap

$\frac{1}{4}$ S27
 1925

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, S. of cor.
 Continue line and measurement
 Descend 138 ft. over W. slope.
 3.59 Power line, brs. NW. & SE.
 6.09 Telephone line, brs. NW. & SE.
 9.79 Wash, 100 lks. wide, course S. Asc. 63 ft. over E. slope.
 20.44 Road, brs. NW. & SE.
 21.09 Spur, slopes SE. Desc. 73 ft. over SW. slope.
 25.04 Wash, 20 lks. wide, course SE. Asc. 81 ft. over E. slope.
 32.89 Telephone line, brs. N. & S.

chains
 34.04 County highway, brs. N. & S., on spur sloping SE.
 Desc. 14 ft. over SW. slope to
 39.71 Intersect the original cor. of secs. 21, 22, 27 & 28, which is
 a sandstone 4x8x18 ins. above ground, marked with 3 grooves
 on E. face and 2 grooves on S. face, and firmly set.
 No accessories.
 Reconstruct this cor. monument and alter same to refer to
 secs. 21 & 22 only, as follows:
 alongside old cor. stone, set an iron post, 3 ft. long,
 2 ins. in diam., 24 ins. in ground, for cor. of secs. 21 & 22
 only, marked on brass cap

T13N	R1E
S21	S22

1925

Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, N. of cor.

Land, rolling.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scrub oak and cacti.

N. 0° 8' E., on true line, bet. secs. 21 & 22.
 Over rolling land, thru dense undergrowth.
 Asc. 107 ft. over SW. slope.

0.20 Telephone line, brs. N. 70° E. & S. 70° W.
 0.90 A.T. & S.F. R.R. (Prescott & Eastern division) brs. N. 70° E.
 and S. 70° W.
 16.00 Spur, slopes E. Desc. 23 ft. over N. slope.
 24.30 Wash, 20 lks. wide, course E. Asc. 42 ft. over SW. slope.
 31.00 Spur, slopes SE. Desc.
 36.00 Ascend
 39.00 Spur, slopes E. Desc. slightly over N. slope to
 39.82 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins.
 in ground, for reestablished 1/4 sec. cor. of secs. 21 & 22,
 marked on brass cap.

1/4	
S21	S22

1925

Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.
Descend 20 ft. over N. slope

41.36 Wash, 20 lks. wide, course E. Asc. 42 ft. over SW. slope.
 47.00 Low spur, slopes SE. Desc. 24 ft. over NE. slope.
 54.30 Wash, 20 lks. wide, course E. Asc. 93 ft. over SW. slope.
 56.76 Intersect E. side line (3-4) of "Copper Van" patented lode
 mining claim, Mineral Survey No. 1714, at a point 1.50
 chs. S. 24° W. from Cor. No. 3 thereof, identical with Cor.
 No. 4 of "Copper Platter" claim of same mineral survey,
 which is a properly marked stone, firmly set in a mound
 of stone.
 Continue line and measurement across patented mineral land.
 61.20 Spur, slopes SE. Desc. 57 ft. over NE. slope
 70.30 Wash, 20 lks. wide, course SE. Asc. 40 ft. over SW. slope to
 79.64 Intersect the original cor. of secs. 15, 16, 21 & 22, which is
 a granite stone, 12x12x12 ins. above ground, marked with
 3 grooves on each of E. & S. faces, and firmly set.
 No accessories.
 Reconstruct this cor. monument as follows:
 alongside old cor. stone, set an iron post, 3 ft. long,
 2 ins. in diam., 24 ins. in ground, for reestablished cor.
 of secs. 15, 16, 21 & 22, marked on brass cap

T13N	R1E
S16	S15
S21	S22

1925

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

chains	Land, rolling. Soil, rocky, 4th rate. Timber, none. Undergrowth, greasewood, sagebrush and scrub oak.

	From cor. of secs. 14, 15, 22 & 23, N. 89° 52' W., on true line, bet. secs. 15 & 22 (E. $\frac{1}{4}$) Over rolling land, thru scattering undergrowth.
8.60	Wash, 100 lks. wide, course SE.
10.60	Telephone line, brs. NE. & SW.
13.00	House brs. N. about 2 chs. dist. School brs. S. about 8 chs. dist. County highway brs. NE. & SW.
19.00	Power line, brs. N. & S.
20.70	House on line.
21.30	Fence, brs. N. & S.
32.30	Wash, course SE. from N. 85° W.
39.98	Intersect the $\frac{1}{4}$ sec. cor. of secs. 15 & 22, reconstructed by Con. Ariz. Smelting Co., which is an iron pipe, filled with cement, projecting 3 ft. above ground, firmly set in ground and mound of stone over which cement has been poured, making a solid mass. No accessories. Reconstruct this cor. monument as follows: alongside the mound, set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for $\frac{1}{4}$ sec. cor. of secs. 15 & 22, marked on brass cap
	$\begin{array}{r} S15 \\ \frac{1}{4} \\ \hline S22 \\ 1925 \end{array}$
	Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor. Thence, N. 88° 53' W., on true line, bet. secs. 15 & 22 (W. $\frac{1}{4}$) Over rolling land, thru scattering undergrowth.
3.30	Telephone line, brs. N. 26° E. & S. 26° W.
3.85	A.T. & S.F. R.R. (Prescott & Eastern Div.) brs. N. 26° E. & S. 26° W.
4.80	Wash, 15 lks. wide, course NE. Asc. 92 ft. over NE. slope.
5.35	Yard fence, brs. S. & NW.
7.35	House, brs. S. 100 lks. dist.
9.75	Fence, brs. NW. & SE.
10.85	Fence, brs. NE. & SW.
25.25	Telephone line, brs. NW. & SE.
36.10	Road, brs. NW. & SE.
37.00	Spur, slopes SE. Desc. Enter dense undergrowth.
39.05	Wash, 10 lks. wide, course S. asc.
39.34	Intersect the cor. of secs. 15, 16, 21 & 22.
	Land, rolling. Soil, rocky, 4th rate. Timber, none. Undergrowth, sagebrush, greasewood and cacti.

	N. 0° 20' W., on true line, bet. secs. 15 & 16. Over rolling land, thru dense undergrowth. Asc. 36 ft. over S. slope.
3.70	Intersect N. end line (2-3) of "Lime Rock" patented lode mining claim, Mineral Survey No. 1714 at a point 2.99 chs. S. 66° E. from N.E.C. cor. thereof, identical with S.E.C. cor. of "Sure Thing" claim of same mineral survey, which is a stone firmly set in ground and properly marked. The NE. cor. of "Lime Rock" claim cannot be found but the N.E.C. cor. of "Copper Platter" is located and brs. S. 66° E., 6.07 chs. dist. from this point of intersection. Thence across "Sure Thing" & "Bonanza" patented mining claims of Mineral Survey No. 1714.
5.00	Road and telephone line, brs. NW. & SE. The Iron King Mine house brs. NW. about 9 chs. dist.

chains
 5.60 Spur, slopes SE. Desc. 55 ft. over N. slope.
 15.80 Wash, 20 lks. wide, course E. Asc. 40 ft. over S. slope.
 20.60 Spur, slopes E. Desc. 88 ft. over N. slope.
 24.80 Wash, 20 lks. wide, course E. Asc. 30 ft. over S. slope.
 28.70 Intersect N. end line (2-3) of "Bonanza" patented lode mining claim, Min. Surv. No. 1714 at a point 2.90 chs. N. $66^{\circ}W$. from cor. No. 3 (NE. cor.) thereof, identical with Cor. No. 2 (NW. cor.) of "Sure Thing" claim, which is a stone firmly set and properly marked.
 Leave patented mineral land.
 29.90 Spur, slopes E. Desc. 58 ft. over N. slope to $\frac{1}{4}$ sec. cor.
 30.30 Intersect S. end line (4-1) of "Iron King Extension No. 1" patented lode mining claim, Min. Surv. No. 1855, at a point 2.54 chs. N. $66^{\circ}32'W$. from Cor. No. 4 (SE. cor.) thereof, which is a stone firmly set and properly marked.
 Thence across patented mineral land.
 40.20 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 15 & 16, marked on brass cap

$\frac{1}{4}$
 S16 | S15
 1925

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. House bears S. $81^{\circ}E$. about 20 chs. dist.
 Descend 45 ft. over N. slope.
 45.50 Road, brs. E. & W.
 47.50 Wash, 10 lks. wide, course SE. Asc. 143 ft. over SW. slope.
 68.30 Ridge, brs. NW. & SE. Desc. 74 ft. over NE. slope to sec. cor.
 79.10 Fence, brs. E. & W.
 80.40 Intersect the original cor. of secs. 9, 10, 15 & 16, which is a stone, 8x14x20 ins., marked with 3 grooves on E. face and 4 grooves on S. face, and firmly set in a mound of stone. No accessories.
 Reconstruct this cor. monument as follows:
 remove the mound of stone, in center of its position
 reset old cor. stone 14 ins. in ground and alongside same set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for cor. of secs. 9, 10, 15 & 16, marked on brass cap

T13N R1E
 S9 | S10
 S16 | S15
 1925

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. The intersection of N. $\frac{1}{4}$ of the sec. line bet. secs. 15 & 16 with W. side line of "Iron King Extension No. 1" patented lode mining claim, Min. Surv. No. 1855 was not obtained owing to inability to find NW. cor. of said claim.


Land, rolling.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, greasewood, scrub oak and cacti.

 From cor. of secs. 10, 11, 14 & 15,
 N. $89^{\circ}21'W$., on true line, bet. secs. 10 & 15.
 Over rolling land, thru dense undergrowth.
 Asc. gradually over NE. slope along fence.
 4.60 Fence cor. from which fences extend E., W. & S.
 Continue along fence.
 15.00 Enter heavily rolling land. Asc. 166 ft. over NE. slope.
 20.24 Fence, brs. N. & S. Turns to W. at 30 lks. S. of this point, and turns to E. at 70 lks. N.
 40.19 Ridge, brs. NW. & SE. Desc. slightly over SW. slope to
 40.30 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24

Resurvey of Part of the Subdivision Lines of T.13 N., R.1 E.

chains


ins.in ground,for reestablished $\frac{1}{4}$ sec.cor.of secs.10 & 15, marked on brass cap



- 45.00 Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor. Desc. 39 ft. over SW. slope.
- 50.43 Wash, 20 lks. wide, course SW. Asc. 160 ft. over E. slope. Fence cor. from which fences extend S. 88° E. and S. Fence cor. brs. S. about 120 lks. dist. from which fences extend N. and W.
- 62.30 Spur, slopes SE. Desc. 81 ft. over SW. slope.
- 76.50 Road, brs. NW. & SE.
- 79.80 Wash, 30 lks. wide, course SE. Asc. slightly over NE. slope.
- 80.60 Intersect the cor. of secs. 9, 10, 15 & 16.

Land, rolling.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scrub oak, greasewood and cacti.

- 1.00 N. 0° 54' W., on true line, bet. secs. 9 & 10. Over rolling land, thru dense undergrowth. Desc. gradually over NE. slope.
- 2.95 Wash, 50 lks. wide, course SE. Asc. 98 ft. over SW. slope.
- 12.60 Road, brs. NW. & SE.
- 23.00 Ridge, brs. NW. & SE. Desc. 145 ft. over NE. slope.
- 30.40 Wash, 100 lks. wide, course E. Asc. 45 ft. over S. slope.
- 36.20 Spur, slopes E. Desc. gradually over N. slope.
- 40.03 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 9 & 10, marked on brass cap



- 49.40 Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. Ascend 103 ft. over S. slope.
- 54.00 Ridge, brs. E. & W. Desc.
- 56.30 Head of wash, course E. Asc.
- 58.56 Spur, slopes E. Desc. 61 ft. over N. slope. Intersect SE. side line (4-1) of "Anne Louise" patented lode mining claim, Min. Surv. No. 3682, at a point 10.60 chs. S. 30° 22' W. from Cor. No. 4 (NE. cor.) thereof, which is a stone firmly set and properly marked. Thence across patented mineral land.
- 71.00 Wash, 20 lks. wide, course NE. Asc. 34 ft. over SE. slope.
- 77.80 Spur, slopes NE. Desc. 57 ft. over NW. slope to sec. cor.
- 78.50 Fence, brs. E. & W.
- 80.06 Point for sec. cor. determined by double proportion ~~as illustrated by diagram accompanying these notes.~~ Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in ground to bedrock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for reestablished cor. of secs. 3, 4, 9 & 10, marked on brass cap



This cor. is situated alongside NW. face of a ledge outcropping about 10 ft. long, 5 ft. high. At a point on this ledge 3 lks. SE. of cor. cut a cross

chains

(X) and "BO S10" alongside cross.

Land, rolling.

Soil, rocky, 4th rate.

Timber, none.

Undergrowth, scrub oak, thornbush and greasewood.

-
- From cor. of secs. 2, 3, 10 & 11,
N. 89° 37' W., on true line, bet. secs. 3 & 10.
Over rolling land, bare of timber or undergrowth.
- 2.60 Fence, brs. N. 70° E. & S. 70° W.
8.50 Fence, brs. N. 13° W. & S. 13° E. Dewey P.O. brs. SE. about 3
chs. dist.
9.55 Road, brs. N. & S.
9.65 Telephone line, brs. N. 13° W. & S. 13° E.
12.30 County highway, brs. N. 13° W. & S. 13° E.
12.85 A.T. & S.F. R.R. (Prescott & Eastern Div.) brs. N. 13° W. &
S. 13° E.
13.60 Telephone line, brs. N. 13° W. & S. 13° E.
15.50 Fence cor. from which fences extend W. and S. 13° E.
This is NE. cor. of the Chas. Mackling place.
20.35 Fence cor. brs. S. 45 lks. dist. from which fences extend S.
and W.
31.25 School brs. N. about 7 chs. dist.
40.75 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24
ins. in ground, for reestablished sec. cor. of secs.
3 & 10, marked on brass cap

S3

 $\frac{1}{4}$

S10

1925

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
School brs. N. 56° 35' E.

Dewey store brs. N. 70° 15' E.

Fence bearing E. & W. bears S. about 50 lks. dist.

- 50.00 Enter heavily rolling land and scattering undergrowth.

Ascend 25 ft. over NE. slope to

- 53.65 Wash, 10 lks. wide, course NE. Ascend 100 ft. over NE. slope

- 61.68 Intersect SE. side line (4-1) of "Gold Standard" patented
lode mining claim, Mineral Survey No. 3683, at a point
5.31 chs. S. 32° 55' W. from Cor. No. 4 (NE. cor.) thereof,
which is a stone firmly set and properly marked.

Thence across patented mineral land.

- 69.14 Wash, 10 lks. wide, course NE. Asc. 38 ft. over E. slope.

- 76.89 Spur, slopes NE. Desc. 30 ft. over NW. slope to sec. cor.

- 77.20 Old mine shaft and hoist, brs. N. about 2.50 chs. dist.

- 81.49 Intersect the cor. of secs. 3, 4, 9 & 10.

Land, rolling.

Soil, rocky, 4th rate in W. 30 chs.; elsewhere, sandy, 1st & 2nd rate.

Timber, none.

Undergrowth, sagebrush, broomweed, greasewood & cacti.

From cor. of secs. 3, 4, 33 & 34, on N. bdy. of Tp., hereinbefore
described,

S. 0° 26' W., on true line, bet. secs. 3 & 4.

Over rolling land, thru scattering undergrowth.

Desc. 15 ft. over SW. slope.

- 3.00 Wash, 100 lks. wide, course SE. Enter level cultivated
land.

- 15.28 Fence, brs. NW. & SE. Leave cultivated land.

- 15.40 Road, brs. NW. & SE.


- 21.40 Wash, 20 lks. wide, course E. Leave level and enter rolling
land. Ascend gradually over NE. slope

- 35.00 Fence, brs. E. & W.

- 39.50 Wash, 80 lks. wide, course SE.

chains
39.80
40.10

Road, brs. E. & W.
(Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 3 & 4, marked on brass cap



from which
a hackberry, 4 ins. diam., brs. S. $56\frac{1}{2}^{\circ}$ E., 142 lks. dist., marked BT only.
No other bearing tree is available.
On an outcropping ledge, 3x4x2 ft., S. $21\frac{3}{4}^{\circ}$ W., 49 lks. dist., cut a 4 in. cross (X) and BO S4 alongside cross. Asc. 34 ft. over NE. slope.

45.00
61.41

Spur, slopes E. Desc. gradually over SE. slope.
Intersect NE. end line (3-4) of "Chas Davis" patented lode mining claim, Min. Surv. No. 3683, at a point 60 lks. S. 57° 5' E. from Cor. No. 3 (NW. cor.) thereof, which is a stone firmly set and properly marked and is identical with Cor. No. 4 (NE. cor.) of "Omaha Mine" pat. lode claim of same Min. Surv.

63.20
72.00
79.20
80.13

Thence across patented mineral land.
Wash, 30 lks. wide, course NE. Asc. 106 ft. over N. slope.
Spur, slopes E. Desc. 88 ft. over S. slope.
Wash, 20 lks. wide, course E. Ascend 15 ft. over NW. slope.
Intersect the cor. of secs. 3, 4, 9 & 10.

Land, rolling and level.
Soil, N. 15 chs. sandy, 2nd rate; elsewhere, rocky, 3rd & 4th rate.
Timber, none.
Undergrowth, sagebrush, greasewood, scrub oak & cacti.


From cor. of secs. 21 & 22, hereinbefore described, West, on true line, on S. bdy. of sec. 21. Over rolling land, thru dense undergrowth. Desc. 40 ft. over SW. slope.

1.87
5.20
8.20
24.00

Intersect the subdivision line bet. secs. 27 & 28. C.C. of said secs. established at this point as hereinafter described.
A.T. & S.F. R.R. (Prescott & Eastern Div.) brs. N. 70° E. & S. 70° W., with telephone line along same.
Wash, 40 lks. wide, course SE. Asc. 103 ft. over NE. slope.
Spur, slopes SE. Descend 90 ft. over SW. slope.

39.65

Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in ground to bedrock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for witness cor. to reestablished $\frac{1}{4}$ sec. cor. of sec. 21 only, marked on brass cap



Cor. No. 2 (SW. cor.) of "Copper Dyke" patented lode mining claim, Min. Surv. No. 1714, identical with Cor. No. 3 (SE. cor.) of "Copper Road" pat. lode claim of same Min. Surv., bears N. 40° W., 5.62 chs. dist., and is a stone firmly set and properly marked.

The S.E.C. cor. of "Copper Dyke" patented lode claim, which is a stone firmly set and properly marked, bears N. $11^{\circ} 40'$ E., 2.54 chs. dist. from W.C.


40.24

(Midpoint of S. bdy. of sec. 21) The point for reestablishment of the S. $\frac{1}{4}$ sec. cor. of sec. 21, is in a wash, 150 lks. wide, course SE. where it would be impracticable to

62 Resurvey of Part of the Subdivision Lines of T.13 N., R.1 E.


chains	monument the cor., therefore W.C. is established on line at 59 lks. E. herefrom as hereinbefore described. Ascend 20 ft. over NE. slope to (Midpoint of N. bdy. of sec. 28) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 28, marked on brass cap				
41.91	$\frac{1}{4}$ S28 1925 Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, S. of cor. Ascend 182 ft. over NE. slope. Spur, slopes N. Descend 73 ft. over NW. slope to intersect the original cor. of secs. 20, 21, 28 & 29, which is a granite stone, 10x12x10 ins. above ground, firmly set and marked with 4 grooves on E. face and 2 grooves on S. face. No accessories. Reconstruct this cor. monument and alter its reference as follows: alongside old stone, set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for cor. of secs. 20 & 21 only, marked on brass cap				
67.60 80.48	<table border="1" style="margin: auto;"> <tr> <td>T13N</td> <td>R1E</td> </tr> <tr> <td>S20</td> <td>S21</td> </tr> </table> S28 1925 Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor. Land, rolling. Soil, rocky, 4th rate. Timber, none. Undergrowth, scrub oak, manzanita, greasewood & cacti.	T13N	R1E	S20	S21
T13N	R1E				
S20	S21				
1.00 19.00 20.65 25.00 25.90 27.20 28.40 29.50 30.50 38.30 40.10	----- N. $1^{\circ}32'W.$, on true line, bet. secs. 20 & 21. Over rolling and mountainous land, thru dense undergrowth. Descend 15 ft. over NW. slope. Wash, 40 lks. wide, course NE. Asc. 158 ft. over SE. slope. Ridge, brs. E. & W. Old road, brs. E. & W. Descend 52 ft. over N. slope. Intersect SE. side line (4-1) of "Arizona" patented lode mining claim, Min. Surv. No. 3392A, at a point 6.24 chs. N. $43^{\circ}46'E.$ from Cor. No. 1 (SE. cor.) thereof, which is a stone firmly set and properly marked. Thence across said claim. Wash, 10 lks. wide, course E. Asc. gradually over SE. slope. Mine shaft and hoist house bear W. about 1.50 chs. Mill on line. Desc. gradually over NW. slope. NE. cor. of boarding house and bend in road, S. $5^{\circ}W.$ & NW. Telephone line, brs. NE. & SW. Wash, 10 lks wide, course NE. Asc. 83 ft. over SE. slope to $\frac{1}{4}$ sec. cor. Road, Humboldt to McCabe, brs. NW. & SE. (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in ground to bedrock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for reestablished $\frac{1}{4}$ sec. cor. of secs. 20 & 21, marked on brass cap				
	$\frac{1}{4}$ S20 S21 1925 Cor. No. 3 (NW. cor.) of "Arizona" patented lode mining claim, Min. Surv. No. 3392A, brs. S. $78^{\circ}18'E.$, 5.59 chs. Cor. No. 5 (SW. cor.) of "Silver Belt" patented lode mining claim, Min. Surv. No. 697, brs. S. $88^{\circ}33'E.$, 7.07 chs. U.S.L.M. No. 1 bears N. $15^{\circ}56'E.$				

chains Mine hoist brs. S.44°E., about 10 chs.dist.
 Ascend 151 ft. over SE. slope.
 60.35 Old tunnel on line.
 65.00 Spur, slopes SE. Descend 82 ft. over NE. slope.
 70.35 Wash, 20 lks. wide, course SE. Asc. 231 ft. over S. slope to
 80.20 Point for sec. cor. determined by double proportion ~~as~~
~~illustrated on diagram accompanying these notes:~~
 Set an iron post, 3 ft. long, 2 ins. in diam., 16 ins. in
 ground to bedrock, deposit a stone marked with a cross
 (X) at base of post, and raise a mound of stone around
 post, for reestablished cor. of secs. 16, 17, 20 & 21,
 marked on brass cap



Land, rolling and mountainous.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scrub oak, sagebrush, thornbush & cacti.

From cor. of secs. 15, 16, 21 & 22,
 N. 89° 40' W., on true line, bet. secs. 16 & 21.
 Over rolling and mountainous land, thru dense undergrowth.
 Asc. 55 ft. over E. slope.
 8.20 Spur, slopes S. House at S. end of a row of houses at
 Iron King Mine, bears N. about 3 chs. dist.
 Desc. 75 ft. over W. slope.
 13.90 Mine shaft bears S. about 2 chs. dist.
 15.90 Wash, 20 lks wide, course SE. Asc. 137 ft. over E. slope to
 1/4 sec. cor.
 26.70 Telephone line, brs. NE. & SW.
 33.70 Road, McCabe to Humboldt, brs. NE. & SW.
 41.23 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24
 ins. in ground, for reestablished 1/4 sec. cor. of secs. 16
 & 21, marked on brass cap



Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, N. of cor.
 U.S.L.M. No. 1 bears N. 86° 36' W.
 Intersection of the E. 1/2 of this sec. line with NW.
 side line of "Copper Chief" patented lode mining claim,
 Min. Surv. No. 1714, was not obtained owing to inability
 to find Cor. No. 1 (SW. cor.) thereof.
 Asc. 535 ft. over E. slope.
 63.20 Old mine tunnel on line.
 70.00 From this point U.S.L.M. No. 1 bears North, 1.52 chs. dist.,
 This monument is a 6 in. cross (X) cut on the top of an
 outcropping ledge bearing E. & W., with a mound of
 stone NW. of cross 2 ft. dist. On SE. face of the ledge
 5 lks. SE. of the cross the marking U.S.L.M. No. 1 AFD is cut.
 80.00 Ridge, brs. NE. & SW. At about 6 chs. NE. of this point
 is a large conical peak. Descend 20 ft. to
 82.45 Intersect the cor. of secs. 16, 17, 20 & 21.

Land, rolling and mountainous.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scrub oak, thornbush and cacti.

N. 0° 7' W., on true line, bet. secs. 16 & 17.
 Over mountainous land, thru dense undergrowth.
 Ascend 50 ft. over SW. slope.

chains							
5.70	Spur, slopes SW. Desc. 466 ft. over NW. slope to						
40.09	(Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 16 & 17, marked on brass cap						
	$\frac{1}{4}$ <table border="1" style="margin: auto;"> <tr> <td>S17</td> <td>S16</td> </tr> </table> 1925	S17	S16				
S17	S16						
	Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. Desc. 88 ft. over NW. slope to						
47.85	Spur, slopes NW. Desc. 132 ft. over NE. slope.						
58.30	Wash, 20 lks. wide, course NE. Asc. gradually over SE. slope.						
62.00	Spur, slopes NE. Desc. 90 ft. over NW. slope.						
64.60	Road, brs. E. & W.						
66.10	Wash, 30 lks. wide, course E. Asc. 30 ft. over S. slope.						
67.05	Fence, brs. E. & W. Wire sheep corral brs. W. about 3 chs. dist. C. J. Page's house brs. W. about 6 chs. dist.						
77.00	Spur, slopes SE. Desc. 56 ft. over NE. slope.						
77.35	Fence, brs. E. & W.						
77.70	Wash, 20 lks. wide, course SE. Asc. 20 ft. over SW. slope.						
79.00	Fence, brs. E. & W.						
80.18	Point for sec. cor. determined by double proportion as illustrated by diagram accompanying these notes: set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for reestablished cor. of secs. 8, 9, 16 & 17, marked on brass cap						
	<table border="1" style="margin: auto;"> <tr> <td>T13N</td> <td>R1E</td> </tr> <tr> <td>S8</td> <td>S9</td> </tr> <tr> <td>S17</td> <td>S16</td> </tr> </table> 1925	T13N	R1E	S8	S9	S17	S16
T13N	R1E						
S8	S9						
S17	S16						
	Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.						
	Land, mountainous. Soil, rocky, 4th rate. Timber, none. Undergrowth, scrub oak, greasewood, sagebrush & cacti.						


	From cor. of secs. 9, 10, 15 & 16, N. $89^{\circ}53'$ W., on true line, bet. secs. 9 & 16. Over mountainous land, thru dense undergrowth, nearly parallel to fence about 80 lks. S. Ascend 176 ft. over NE. slope to						
14.30	Ridge, brs. SE. & W. Thence along top of ridge.						
38.00	Leave top of ridge, brs. E. & NW. Desc. 93 ft. over SW. slope to						
40.98	(Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 9 and 16, marked on brass cap						
	$\frac{1}{4}$ <table border="1" style="margin: auto;"> <tr> <td>S9</td> </tr> <tr> <td>S16</td> </tr> </table> 1925	S9	S16				
S9							
S16							
	Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. Enter rolling land. Desc. gradually over SW. slope.						
49.84	Wash, 40 lks. wide, course SE. Asc. 47 ft. over NE. slope.						
66.60	Spur, slopes SE. Desc. 36 ft. over SW. slope.						
77.00	Wash, 20 lks. wide, course SE. Asc. 34 ft. over SE. slope to sec. cor.						
79.00	Wash, 10 lks. wide, course S.						
79.30	Fence, brs. N. & S. Fence cor. brs. S. about 100 lks. dist. from which fences extend E., W., N. & S.						
81.95	Intersect the cor. of secs. 8, 9, 16 & 17.						
	Land, mountainous & rolling.						

chains Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scrub oak, greasewood, sagebrush & cacti.


N.0°14'W., on true line, bet. secs. 8 and 9.
 Over rolling and mountainous land, thru dense undergrowth.
 Ascend 40 ft. over SW. slope.

2.50 Spur, slopes SE. Desc. 46 ft. over NE. slope.
 6.30 Wash, 20 lks. wide, course SE. Asc. 56 ft. over SW. slope.
 19.50 Fence cor. brs. E. about 150 lks. dist., from which fences
 extend S. and E.

24.20 Spur, slopes SE. Desc. 96 ft. over NE. slope.
 31.40 Wash, 20 lks. wide, course SE. Asc. 23 ft. over S. slope.
 39.40 Ridge, brs. E. & W. Road, brs. E. & W. Desc. slightly to
 40.09 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 10 ins.
 in ground to bedrock, deposit a stone marked with a
 cross (X) at base of post, and raise a mound of stone
 around post, for reestablished $\frac{1}{4}$ sec. cor. of secs. 8 and
 9, marked on brass cap,



65.80 Desc. 91 ft. over N. slope.
 75.80 Wash, 150 lks. wide, course SE. Asc. 93 ft. over S. slope.
 80.18 Ridge, brs. E. & W. Road, brs. E. & W. Desc. 24 ft. over N.
 slope to
 Point for sec. cor. determined by double proportion ~~as~~
~~illustrated on diagram accompanying these notes:~~
 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
 ground, for reestablished cor. of secs. 4, 5, 8 & 9, marked
 on brass cap,




Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Land, rolling and mountainous.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scrub oak, thornbush, sagebrush & cacti.

From cor. of secs. 3, 4, 9 & 10,
 N.89°40'W., on true line, bet. secs. 4 and 9.
 Over rolling and mountainous land, thru dense undergrowth.
 Across patented mineral land. Asc. 140 ft. over NE. slope.

13.18 Intersect SW. end line (1-2) of "Chas. Davis" patented lode
 mining claim, Mineral Survey No. 3683, at a point 48 lks.
 S.57° 5'E. from Cor. No. 2 thereof.
 Leave patented mineral land.

23.60 Spur, slopes SE. Desc. 122 ft. over SW. slope.
 40.20 Wash, 20 lks. wide, course S. Asc. 6 ft. over SE. slope to
 40.70 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 16 ins.
 in ground to bedrock, deposit a stone marked with a
 cross (X) at base of post, and raise a mound of stone
 around post, for reestablished $\frac{1}{4}$ sec. cor. of secs. 4 & 9,
 marked on brass cap,



52.30 Asc. 61 ft. over SE. slope.
 Ridge, brs. N.70°E. & S.70°W. Desc. 89 ft. over NW. slope.

66 Resurvey of Part of the Subdivision lines of T.13 N., R.1E.

chains	
55.13	Intersect East side line (2-3) of "3rd Independence" lode mining claim, at a point 1.27 chs. N. 2° 40' E. from Cor. No. 2 (SE. cor.) thereof. Thence across "3rd Independence" and "Independence" lode mining claims, surveyed for segregation as hereinbefore described.
63.95	Wash, 10 lks. wide, course NE. Asc. 55 ft. over E. slope.
69.40	Old road, brs. NE. & SW.
73.00	Spur, slopes N. Desc. gradually over NW. slope to sec. cor.
73.12	Intersect West side line (1-2) of "Independence" lode mining claim at a point 4.93 chs. S. 12° 6' E. from Cor. No. 1 (NW. cor.) thereof. Leave mining claims.
78.25	Fence, brs. N. & S.
81.39	Intersect the cor. of secs. 4, 5, 8 & 9. Land, rolling and mountainous. Soil, rocky, 4th rate. Timber, none. Undergrowth, scrub oak, thornbush, sagebrush & cacti.

	From cor. of secs. 4, 5, 32 & 33 on N. bdy. of Tp., hereinbefore described, S. 1° 27' W., on true line, bet. secs. 4 & 5. Over rolling and mountainous land, thru dense undergrowth. Asc. 73 ft. over NE. slope.
2.00	Fence, brs. E. & W. Fence cor. brs. E. about 3 chs. dist., from which fences extend E., W. & S.
14.50	Ridge, brs. E. & W. Desc. 34 ft. over S. slope.
22.30	Wash, 40 lks. wide, course NE. Asc. 185 ft. over NW. slope.
30.85	Ridge, brs. E. & W. Desc. 36 ft. over SE. slope to $\frac{1}{4}$ sec. cor.
32.40	Road, brs. NE. & SW.
40.20	(Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 4 & 5, marked on brass cap, $\frac{1}{4}$ S5 S4 1925
	Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. Descend gradually over SE. slope.
44.20	Wash, 20 lks. wide, course NE. Asc. gradually over N. slope.
62.20	Spur, slopes E. Desc. 57 ft. over S. slope.
74.10	Wash, 20 lks. wide, course NE. Asc. 34 ft. over NW. slope to
80.30	Intersect the cor. of secs. 4, 5, 8 & 9. Land, rolling and mountainous. Soil, rocky, 3rd & 4th rate. Timber, none. Undergrowth, scrub oak, thornbush, sagebrush & cacti.

	From reestablished cor. of secs. 20 & 21, West, on true line, on S. bdy. of sec. 20. Over rolling & mountainous land, thru dense undergrowth.
1.10	Wash, 40 lks. wide, course NE. Asc. slightly over SE. slope to
1.47	Intersect subdivision line bet. secs. 28 & 29. C.C. of said secs. established at this point as herein- after described. Asc. 299 ft. over SE. slope.
8.90	Fence, brs. N. & S. Fence cor. brs. S. about 5 chs. dist. from which fences extend W. & N.
40.85	Spur, slopes SE. Fence, brs. N. & S. Desc. slightly over SW. slope to
41.40	(Midpoint of N. bdy. of sec. 29) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 29 only, marked on brass cap, $\frac{1}{4}$ S29 1925

Resurvey of Part of the Subdivision lines of T.13 N., R.1 E.

chains

44.59 Raise a mound of stone, 3 ft. base, 1½ ft. high, S. of cor. Desc. 72 ft. over SW. slope to (40.00 chs. E. from cor. of secs. 19 & 20) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for reestablished ¼ sec. cor. of sec. 20 only, marked on brass cap,

¼ S20
1925

45.10 Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor. Desc. gradually over SW. slope.

48.90 Wash, 10 lks. wide, course S. Asc. 34 ft. over SE. slope.

54.20 Telephone line, brs. NE. & SW.

60.55 Spur, slopes S. From this point, McCabe Bar brs. S. 44° W., about 20 chs. dist. and NW. cor. of McCabe Post Office brs. S. 34½° W. about 30 chs. dist. Desc. 126 ft. over W. slope to wash.

65.27 From this point, Cor. No. 3 of "Jim Crow No. 2" patented lode mining claim, Mineral Survey No. 1956, identical with Cor. No. 5 of "Jim Crow" patented lode mining claim, Mineral Survey No. 1265 and Cor. No. 1 of "Columbus" patented lode mining claim, Mineral Survey No. 1635, which is a stone properly marked, bears S. 4° 43' E., 8.20 chs. dist.

70.98 Wash, 30 lks. wide, course SE. Asc. gradually over SE. slope. From this point, Cor. No. 1 of "Kingsley" patented lode mining claim, Mineral Survey No. 1611, brs. N. 25° 18' E., 6.18 chs. dist.

An accessory to Cor. No. 1 of "Jim Crow" patented lode mining claim, Mineral Survey No. 1265, consisting of a 6 inch cross (X) on a ledge outcropping, with "BR JC" cut on W. face of same, bears S. 76° 20' E., 7.03 chs. dist. from same point on sec. line.

A house bears NW. about 2.00 chs. dist.

A well bears S. about 2.00 chs. dist.

71.10 Continue gradual ascent over SE. slope.

81.32 Road, brs. NW. & SE.

84.59 (79.85 chs. W. from C.C. of secs. 28 & 29) Intersect the subdivision line bet. secs. 29 & 30. Closing cor. of said secs. established at this point as hereinafter described. (A point due S. from cor. of secs. 17, 18, 19 & 20) Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for reestablished cor. of secs. 19 & 20 only, marked on brass cap,

T13N | R1E
S19 | S20

S30
1925

Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor. From this cor., Cor. No. 3 of "Oliphant" patented lode mining claim, Mineral Survey No. 1611, which is a stone marked 1611 O 3, bears S. 32½° E., 4.53 chs. dist.

Land, rolling & mountainous.
Soil, rocky, 4th rate.
Timber, none.
Undergrowth, scrub oak, thornbush, sagebrush & cacti.

17.00 From cor. of secs. 19 & 20,
36.73 West, on true line, on S. bdy. of sec. 19.
Over rolling & mountainous land, thru dense undergrowth. Asc. 144 ft. over S. & SE. slopes.
Mine shaft bears N. about 1 ch. dist.
(40.00 chs. W. from C.C. of secs. 29 & 30) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for reestablished ¼ sec. cor. of sec. 30 only, marked on brass cap,

¼ S30
1925

Raise a mound of stone, 3 ft. base, 1½ ft. high, S. of cor.

68 Resurvey of Part of the Subdivision lines of T.13 N., R.1 E.

chains	
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 19 only, marked on brass cap,
	$\frac{1}{4}$ S19 1925
	Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor. Asc. 40 ft. over SE. slope.
44.50	Ridge, brs. NE. & SW. Road, brs. NE. & SW. Desc. 192 ft. over NW. slope.
60.70	Wash, 50 lks. wide, course NE. Asc. 134 ft. over SE. slope to sec. cor.
61.00	Road, brs. NE. & SW.
72.70	Wash, 10 lks. wide, course SE.
82.16	(45.43 chs. W. from $\frac{1}{4}$ sec. cor. of sec. 30) Intersect the W. bdy. of the Tp. (G. & S. R. Meridian) at 89.02 chs. S. from cor. of secs. 18 & 19. Cor. of secs. 19 & 30 reestablished at this point as hereinbefore described.
	Land, rolling & mountainous. Soil, rocky, 4th rate. Timber, none. Undergrowth, scrub oak, thornbush & cacti.

	From cor. of secs. 19 & 20, North, on true line, bet. secs. 19 & 20. Over rolling & mountainous land, thru dense undergrowth. Asc. 24 ft. over S. slope.
2.50	Spur, slopes SE. Desc. gradually over NE. slope.
11.00	Wash, 10 lks. wide, course SE. Asc. gradually over SE. slope.
19.00	From this point, Cor. No. 1 of "Fractional" patented lode mining claim, Mineral Survey No. 1611, identical with Cor. No. 2 of "Lady Alde" and Cor. No. 4 of "Cleveland" patented lode claims of same Mineral Survey, which is a stone, firmly set and properly marked, bears West, 2.94 chs. dist.
21.60	Road, brs. E. & W.
32.25	Old road, brs. NW. & SE.
34.00	Wash, 10 lks. wide, course SE. Asc. 40 ft. over SE. slope.
38.00	Ridge, brs. NE. & SW. Desc. 40 ft. over NW. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 19 & 20, marked on brass cap,
	$\frac{1}{4}$ S19 S20 1925
	Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. Desc. 150 ft. over NW. slope.
61.10	Old road, brs. NE. & SW.
66.10	Wash, 50 lks. wide, course NE. Asc. 86 ft. over SE. slope.
78.00	Spur, slopes E. Desc. 30 ft. over N. slope.
80.00	Head of wash, course NE. Asc. 20 ft. over SE. slope.
80.50	Spur, slopes NE. Desc. 34 ft. over NW. slope to
82.45	Point for sec. cor. determined by single proportion and record as illustrated by diagram accompanying these notes: set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for reestablished cor. of secs. 17, 18, 19 & 20, marked on brass cap,
	T13N R1E S18 S17 S19 S20 1925
	Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
	Land, rolling & mountainous. Soil, rocky, 4th rate. Timber, none.

chains

Undergrowth, scrub oak, thornbush, & manzanita.

 From cor. of secs. 16, 17, 20 & 21,
 N. 88° 23' W., on true line, bet. secs. 17 & 20.
 Over rolling & mountainous land, thru dense undergrowth.
 Desc. 329 ft. over W. slope.

23.50 Wash, 20 lks. wide, course NW. Asc. 53 ft. over NE. slope.

28.40 Old road, brs. NE. & SW.

33.70 Spur, slopes N. From this point an old mine hoist brs.
 N. about 15 chs. dist.

Desc. 36 ft. over NW. slope.

38.30 Wash, 20 lks. wide, course N. Asc. 25 ft. over E. slope to

41.35 (Midpoint of S. bdy. of sec. 17) Set an iron post, 3 ft. long,
 1 in. in diam., 20 ins. in ground to bedrock, deposit a
 stone marked with a cross (X) at base of post, and raise
 a mound of stone around post, for reestablished $\frac{1}{4}$ sec.
 cor. of sec. 17 only, marked on brass cap,

$\frac{1}{4}$ S17

1925

Asc. 15 ft. over E. slope to

42.68 (40.00 chs. in Easting from cor. of secs. 17, 18, 19 & 20) Set
 an iron post, 3 ft. long, 1 in. in diam., 6 ins. in ground
 to bedrock, deposit a stone marked with a cross (X) at
 base of post, and raise a mound of stone around post,
 for reestablished $\frac{1}{4}$ sec. cor. of sec. 20 only, marked on
 brass cap,

$\frac{1}{4}$ S20

1925

Asc. 24 ft. over E. slope.

45.20 Spur, slopes N. Desc. 186 ft. over NW. slope.

59.00 Wash, 20 lks. wide, course NE. Asc. 113 ft. over SE. slope.

65.00 Spur, slopes NE. Desc. 168 ft. over NW. slope.

71.00 Wash, 20 lks. wide, course NE. Asc. 133 ft. over SE. slope.

81.00 Spur, slopes NE. Desc. 45 ft. over NW. slope to

82.70 Intersect the cor. of secs. 17, 18, 19 & 20.

Land, rolling & mountainous.

Soil, rocky, 4th rate.

Timber, none.

Undergrowth, scrub oak, manzanita & cacti.

 From cor. of secs. 18 & 19 on W. bdy. of Tp. (G. & S. R. Meridian)
 hereinbefore described,

S. 85° 31' E., on true line, bet. secs. 18 & 19.

Over rolling & mountainous land, thru dense undergrowth.

Asc. 183 ft. over N. & NW. slopes.

11.30 Ridge, brs. NE. & SW. Desc. 604 ft. over SE. slope to

41.02 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in
 diam., 24 ins. in ground, for reestablished $\frac{1}{4}$ sec. cor.
 of sec. 18 only, marked on brass cap,

$\frac{1}{4}$ S18

1925

Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.
 From this cor., Cor. No. 3 of "Gold Nut" patented lode
 mining claim, Mineral Survey No. 1601, identical with
 Cor. No. 4 of "Willow Tree" patented lode claim of same
 Mineral Survey, bears N. 69° 20' E., 7.26 chs. dist.

Desc. gradually over SE. slope to

42.30 (40.00 chs. in westing from cor. of secs. 17, 18, 19 & 20) Set
 an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground,
 for reestablished $\frac{1}{4}$ sec. cor. of sec. 19 only, marked on
 brass cap,

$\frac{1}{4}$ S19

1925

chains

Raise a mound of stone, 3 ft. base, 1½ ft. high, S. of cor. From this cor., an accessory to Cor. No. 1 of "Willow Tree" patented lode mining claim, Mineral Survey No. 1601, and to Cor. No. 2 of "Gold Nut" patented lode claim of of same mineral survey, consisting of a ledge outcropping mkd. BR WT NO 1-1601 brs. S. 68° 30' E., 11.69 chs. dist.

An accessory to Cor. No. 4 of "Gold Nut" patented lode mining claim, Mineral Survey No. 1601, consisting of a ledge outcropping mkd. BR GN NO 4-1601 brs. S. 35° 50' W., 17.27 chs. dist.

Desc. 71 ft. over SE. slope.

43.25 Old road, brs. NW. & SE.

47.20 Wash, 20 lks. wide, course NE. Desc. gradually over NE. slope.

54.25 wash, 10 lks. wide, course NE. Asc. 52 ft. over NW. slope.

62.60 Spur, slopes NE. Desc. 163 ft. over E. slope.

80.20 Wash, 10 lks. wide, course NE. Asc. gradually over NW. slope to

82.42 Intersect the cor. of secs. 17, 18, 19 & 20.

Land, rolling & mountainous.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scrub oak, manzanita & cacti.


N. 0° 21' E., on true line, bet. secs. 17 & 18.
 Over rolling & mountainous land, thru dense undergrowth.
 Desc. 25 ft. over NW. slope.

3.70 Wash, 20 lks. wide, course NE. Asc. 112 ft. over S. slope.

24.20 Point of spur, slopes SE. Desc. 81 ft. over NE. slope.

27.00 Wash, 20 lks. wide, course NE. near head. Asc. 29 ft. over S. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in ground, to bedrock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for reestablished ¼ sec. cor. of secs. 17 & 18, marked on brass cap,



Asc. gradually over S. slope.

42.00 Spur, slopes E. from NW. Desc. gradually over NE. slope.


50.20 Wash, 20 lks. wide, course SE. Asc. 167 ft. over SE. slope.

63.10 Spur, slopes NE. Desc. 168 ft. over NW. slope to sec. cor.

66.87 Intersect S. end line of "Eldorado" patented lode mining claim, Mineral Survey No. 2279, at a point 2.62 chs. N. 88½° E. from Cor. No. 3 thereof, which is a stone firmly set and properly marked.

Thence across patented mineral land.

80.00 Point for sec. cor. determined by single proportion and record ~~as illustrated by diagram accompanying these notes~~; set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for reestablished cor. of secs. 7, 8, 17 & 18, marked on brass cap,



Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

Land, rolling & mountainous.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scrub oak, manzanita & cacti.

From cor. of secs. 8, 9, 16 & 17,

Resurvey of Part of the Subdivision lines of T.13 N., R.1 E.

chains N.88°41'W., on true line, bet. secs. 8 & 17.
 Over rolling & mountainous land, thru dense undergrowth.
 Desc. gradually over SW. slope.
 3.70 Wash, 20 lks. wide, course SE. Asc. 147 ft. over NE. slope.
 19.00 Spur, slopes SE. Desc. 66 ft. over SW. slope.
 23.65 Wash, 20 lks. wide, course S. Asc. 142 ft. over E. slope to
 40.87 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24
 ins. in ground, for reestablished $\frac{1}{4}$ sec. cor. of secs.
 8 & 17, marked on brass cap,

S8
 $\frac{1}{4}$
 S17
 1925

Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
 Asc. 46 ft. over E. slope.
 45.50 Ridge, brs. NE. & SW. Desc. 38 ft. over NW. slope.
 54.40 Wash, 20 lks. wide, course N. Fence, brs. N. & S.
 Fence cor. brs. S. about 2 chs. dist. from which fences
 extend E. & N.
 Asc. 40 ft. over E. slope.
 72.15 Spur, slopes NE. Desc. 70 ft. over NW. slope to sec. cor.
 75.73 Intersect E. side line (1-2) of "Eldorado" patented lode
 mining claim, Mineral Survey No. 2279, at a point 9.95 chs.
 S. 1°30'E. from Cor. No. 1 thereof, which is a stone firmly
 set and properly marked.
 Thence across patented mineral land.
 81.74 Intersect the cor. of secs. 7, 8, 17 & 18.

 Land, rolling & mountainous.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scrub oak, manzanita & bacti.

 From cor. of secs. 7 & 18 on W. bdy. of the Tp. (G. & S. R. Mer-
 idian) hereinbefore described,
 S. 88°48'E., on true line, bet. secs. 7 & 18.
 Over rolling & mountainous land, thru dense undergrowth.
 Asc. slightly over NW. slope.
 0.40 Spur, slopes NE. Desc. 132 ft. over SE. slope.
 26.50 Wash, 20 lks. wide, course NE. Asc. gradually over NW. slope.
 38.85 Old road, brs. NE. & SW.
 39.50 Low spur, slopes N. Desc. slightly over E. slope to
 40.74 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in
 diam., 12 ins. in ground to bedrock, deposit a stone mkd.
 with a cross (X) at base of post, and raise a mound of
 stone around post, for reestablished $\frac{1}{4}$ sec. cor. of secs.
 7 & 18, marked on brass cap,

S7
 $\frac{1}{4}$
 S18
 1925

Desc. 92 ft. over E. slope.
 44.00 Old road, brs. NE. & SW.
 74.00 Wash, 20 lks. wide, course NE. Asc. 30 ft. over NW. slope to cor.
 78.63 Intersect W. side line (3-4) of "Eldorado" patented lode
 mining claim, Mineral Survey No. 2279, at a point 9.54 chs.
 S. 1°30'E. from Cor. No. 4 thereof, which is a stone firmly
 set and properly marked.
 Thence across patented mineral land.
 81.68 Intersect the cor. of secs. 7, 8, 17 & 18.

 Land, rolling & mountainous.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scrub oak, manzanita & cacti.

chains. N.0°15'W., on true line, bet. secs. 7 & 8.
 Over rolling & mountainous land, thru dense undergrowth.
 Across "Eldorado", "Read Star" and "Smugler" patented
 lode mining claims, Mineral Survey No. 2279.
 Desc. 18 ft. over NW. slope.
 5.40 Wash, 20 lks. wide, course NE. Asc. 28 ft. over SE. slope.
 10.50 Road, brs. NE. & SW.
 16.40 Spur, slopes E. Old mine shaft brs. E. about 1 ch. dist.
 Desc. 128 ft. over NE. slope to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground,
 for reestablished $\frac{1}{4}$ sec. cor. of secs. 7 & 8, marked on
 brass cap,

4
 S7 | S8

1925

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Desc. 46 ft. over NE. slope.
 45.80 Wash, 20 lks. wide, course E. Asc. 10 ft. over SE. slope.
 46.70 Point of spur, slopes E. Desc. 10 ft. over NE. slope.
 49.00 Wash, 50 lks. wide, course SE. Asc. 98 ft. over S. slope.
 55.10 Intersect N. end line (2-3) of "Smugler" patented lode min-
 ing claim, Mineral Survey No. 2279, at a point 4.90 chs.
 S. 88 $\frac{1}{2}$ ° W. from Cor. No. 2 thereof, which is a stone firmly
 set and properly marked.

Leave patented mineral land.
 56.25 Fence, brs. E. & W. Fence cor. brs. E. about 5 chs. dist.
 from which fences extend E., W. & N.

64.00 Old road, brs. E. & W.
 64.40 From this point a house brs. N. 86° W. about 60 chs. dist.
 65.00 Ridge, brs. E. & W. Desc. 39 ft. over N. slope.

72.40 Wash, 10 lks. wide, course E. Asc. 14 ft. over SE. slope to
 80.00 Spur, slopes NE. Point for sec. cor. determined by single
 proportion and record ~~as illustrated by diagram~~
~~accompanying these notes~~: set an iron post, 3 ft. long,
 2 ins. in diam., 24 ins. in ground, for reestablished cor.
 of secs. 5, 6, 7 & 8, marked on brass cap,

T13N R1E

S6 | S5
 S7 | S8

1925

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling & mountainous.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scrub oak, thornbush & cacti.

From cor. of secs. 4, 5, 8 & 9,
 N. 88° 54' W., on true line, bet. secs. 5 & 8.
 Over rolling land, thru dense undergrowth.
 Asc. gradually over N. slope.

14.00 Wash, 20 lks. wide, course NE. Asc. 80 ft. over SE. slope to
 40.83 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24
 ins. in ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 5
 & 8, marked on brass cap,

S5
 $\frac{1}{4}$ ———
 S8

1925

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 Asc. 109 ft. over SE. slope to sec. cor.

76.50 Fence, brs. N. & S.
 81.66 Intersect the cor. of secs. 5, 6, 7, & 8.

Land, rolling.

chains Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scrub oak, thornbush & cacti.

From cor. of secs. 6 & 7 on W. bdy. of the Tp. (G. & S. R. Meridian) hereinbefore described,
 S. 88° 50' E., on true line, bet. secs. 6 & 7.
 Over rolling land, thru dense undergrowth.
 Desc. gradually over SE. slope.

3.50 Wash, 10 lks. wide, course SE. Desc. gradually over S. slope.

6.00 Fence, brs. N. & S. Fence cor. brs. S. about 10 chs. dist. from which fences extend E. & N.

8.00 Low broad ridge, brs. N. 70° W. & S. 70° E. Desc. gradually over NE. slope to

40.34 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 6 & 7, marked on brass cap,

S6
 ———
 S7
 1925

81.04 Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor. Desc. 80 ft. over N. slope to intersect the cor. of secs. 5, 6, 7, & 8.

Land, rolling.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scrub oak, thornbush & cacti.

From cor. of secs. 5, 6, 31 & 32 on N. bdy. of the Tp., hereinbefore described,
 S. 1° 3' W., on true line, bet. secs. 5 & 6.
 Over rolling & mountainous land, thru dense undergrowth.
 Asc. 32 ft. over NE. slope.

2.00 Spur, slopes E. Desc. 101 ft. over S. slope.

10.70 Fence, brs. E. & W. Fence cor. brs. E. about 5 chs. dist. from which fences extend W., S. & N. 80° E.

11.55 Wash, 20 lks. wide, course NE. Asc. 56 ft. over N. slope.

18.60 Spur, slopes E. from SW. Desc. 101 ft. over SE. slope to $\frac{1}{4}$ sec. cor.

25.30 Fence, brs. E. & W. Fence cor. brs. E. about 5 chs. dist. from which fences extend W., N. & S.

40.31 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 5 & 6, marked on brass cap,

$\frac{1}{4}$
 S6 | S5
 1925

Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. Desc. gradually over SE. slope.

12.30 Wash, 20 lks. wide, course NE. Asc. 50 ft. over NW. slope.

55.00 Ridge, brs. E. & W. Road, brs. E. & W. Desc. 94 ft. over SE. slope.

73.65 Wash, 20 lks. wide, course NE. from W. Asc. 50 ft. over NW. slope to

80.32 Intersect the cor. of secs. 5, 6, 7 & 8.

Land, rolling & mountainous.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scrub oak, thornbush & cacti.

chains The following notes describe the survey of the subdivision lines of the south two tiers of secs. of T.13 N., R.1 E., the line bet. secs. 23 & 26, the S. $\frac{1}{2}$ of line bet. secs. 22 & 23, and the E. $\frac{1}{2}$ of line bet. secs. 22 & 27 of said township, which completes the subdivision thereof.

 From cor. of secs. 25, 26, 35 & 36,
 South, on random line, bet. secs. 35 & 36.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.40 Fall 9 lks. E. of the std. cor. of secs. 35 & 36 on the S.
 bdy. of the Tp. (3rd Std. Par. N.) hereinbefore described.
 Thence,
 N. $0^{\circ} 4' E.$, on true line, bet. secs. 35 & 36.
 Over mountainous land, thru dense undergrowth.
 Asc. 290 ft. over SE. slope.
 18.10 Spur, slopes SW. Desc. 193 ft. over NW. slope.
 25.70 Wash, 20 lks. wide, course SW. Thence across old mine
 workings. Asc. 299 ft. over SE. slope to
 40.20 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam.,
 24 ins. in ground, for $\frac{1}{4}$ sec. cor. of secs. 35 & 36, marked
 on brass cap,

$\frac{1}{4}$
 S35 | S36
 1925

Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
 Asc. 60 ft. over SE. slope.
 44.20 Spur, slopes SW. Asc. 88 ft. over W. & SW. slopes.
 57.25 Ridge, brs. NW. & SE. Desc. 90 ft. over NE. & E. slopes.
 69.80 Spur, slopes NE. Descend 95 ft. over NW. slope to
 80.40 Intersect the cor. of secs. 25, 26, 35 & 36, hereinafter
 described.

Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scrub oak, thornbush & cacti.

 From cor. of secs. 25 & 36 on E. bdy. of the Tp.,
 N. $89^{\circ} 46' W.$ (parallel to N. bdy. of sec. 25) on random line
 bet. secs. 25 & 36, for distance only.
 40.00 Set temp. $\frac{1}{4}$ sec. cor. of secs. 25 & 36.
 80.00 Set temp. cor. (A) of secs. 25, 26, 35 & 36.

 From cor. of secs. 23, 24, 25 & 26,
 S. $0^{\circ} 3' W.$ (parallel to E. bdy. of sec. 25) on random line
 bet. secs. 25 & 26, for distance only.
 27.79 Set temp. $\frac{1}{4}$ sec. cor. of sec. 26.
 40.00 Set temp. $\frac{1}{4}$ sec. cor. of sec. 25.
 67.79 Set temp. cor. (B) of secs. 25, 26, 35 & 36.
 Continue line and measurement
 67.88 Fall 4 lks. N. $89^{\circ} 46' W.$ from temp. cor. (A) of secs. 25, 26, 35
 & 36.
 The true lengths of the S. and W. bdrs. of sec. 25 are
 therefore, 80.04 chs. & 67.88 chs. respectively.

 From cor. of secs. 25 & 36 on E. bdy. of the Tp., hereinbefore
 described,
 N. $89^{\circ} 46' W.$, on true line, bet. secs. 25 & 36.
 Over mountainous land, thru dense undergrowth.
 Asc. 40 ft. over E. slope.
 8.20 Ridge, brs. N. & S. Desc. 418 ft. over W. slope.
 31.25 Wash, 20 lks. wide, course S. Asc. 179 ft. over SE. slope to
 40.02 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24
 ins. in ground, for $\frac{1}{4}$ sec. cor. of secs. 25 & 36, marked on
 brass cap,

Survey of Part (Completion) of Subdivision lines of T.13 N., R.1 E.75

chains

$$\frac{1}{4} \frac{S25}{S36}$$

1925

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 Asc. 210 ft. over SE. slope to
 67.20 Wash, 10 lks. wide, course SE. Asc. 271 ft. over NE. & N.
 slopes to
 80.04 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the
 ground, for cor. of secs. 25, 26, 35 & 36, marked on brass
 cap,

T13N	R1E
S26	S25
S35	S36

1925

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scrub oak, thornbush & cacti.

N.0° 3'E., on true line, bet. secs. 25 & 26.
 Over mountainous land, thru dense undergrowth.
 Desc. 20 ft. over N. slope.
 1.00 Head of wash, course NE. Asc. 121 ft. over SE. slope.
 13.80 Ridge, brs. N. & SW. Thence along top of ridge.
 Asc. gradually to
 21.00 Leave top of ridge, brs. NW. & S. Desc. 200 ft. over NE.
 slope to
 27.88 (40.00 chs. S.0° 3'W. from cor. of secs. 23, 24, 25 & 26) Set an
 iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground,
 for $\frac{1}{4}$ sec. cor. of sec. 25 only, marked on brass cap,

$$\frac{1}{4} S25$$

1925

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, E. of cor.
 Desc. 114 ft. over NE. slope to
 37.00 Wash, 20 lks. wide, course NE. near head. Asc. gradually over
 SE. slope to
 40.00 Ridge, brs. NE. & SW. Set an iron post, 3 ft. long, 1 in. in
 diam., 24 ins. in ground, for $\frac{1}{4}$ sec. cor. of sec. 26 only,
 marked on brass cap,

$$\frac{1}{4} S26$$

1925

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Desc. 158 ft. over N. slope.
 53.40 Wash, 20 lks. wide, course NW. Asc. 89 ft. over S. slope.
 59.40 Spur, slopes W. Desc. 100 ft. over N. slope.
 64.00 Wash, 20 lks. wide, course W. Asc. 82 ft. over SW. slope to
 67.88 Intersect the cor. of secs. 23, 24, 25 & 26.

Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scrub oak, thornbush & cacti.

From std. cor. of secs. 34 & 35 on the S. bdy. of the Tp. (3rd
 Std. Par. N.), hereinbefore described,
 N.0° 1'W., on true line, bet. secs. 34 & 35.
 Over mountainous land, thru very scattering timber and

chains
 4.90 and dense undergrowth.
 Desc. 70 ft. over NE. slope.
 "ash, 20 lks. wide, course NW. Desc. 273 ft. over W. & NW.
 slopes to
 32.20 Wash, 100 lks. wide, course NE. Thence over gently rolling
 land. Asc. gradually over E. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground,
 for $\frac{1}{4}$ sec. cor. of secs. 34 & 35, marked on brass cap,

S34 | S35
 1925

from which
 An oak, 8 ins. in diam., brs. S. 13° W., 112 lks. dist.,
 marked $\frac{1}{4}$ S34 BT
 No other bearing tree available.
 Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
 Continue over gently rolling E. slope.
 41.20 West or right bank of Agua Fria River, brs. NW. & SE.
 Thence in river bed in bend of same course SE. from
 NE., which at this point has a stream of running water,
 30 lks. wide, 2 ins. deep.
 60.00 West or right bank of Agua Fria River, brs. NE. & SW.
 Leave river bed and enter mountainous land.
 Asc. 223 ft. over SE. slope.
 74.00 Spur, slopes E. Descend 108 ft. over N. slope.
 78.80 Wash, 20 lks. wide, course SE. from SW. Asc. 99 ft. over SW.
 slope to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in
 ground to bedrock, deposit a stone marked with a cross
 (X) at base of post, and raise a mound of stone around
 post, for cor. of secs. 26, 27, 34 & 35, marked on brass cap,

T13N | R1E
 S27 | S26
 S34 | S35
 1925

from which
 A cedar, 8 ins. in diam., brs. S. 50° E., 128 lks. dist.,
 marked T13N R1E S35 BT.
 No other bearing trees available.
 Land, mountainous and gently rolling.
 Soil, rocky, 4th rate.
 Timber, a few cedars & oaks, and along both sides of the
 Agua Fria River are large cottonwoods & ashes.
 Undergrowth, scrub oak, thornbush & cacti.

40.00 East, on random line, bet. secs. 26 & 35.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.12 Fall 46 lks. S. of the cor. of secs. 25, 26, 35 & 36.
 Thence,
 S. 89° 40' W., on true line, bet. secs. 26 & 35.
 Over mountainous land, thru dense undergrowth.
 Asc. 25 ft. over E. slope.
 2.00 Ridge, brs. N. & S. Desc. 371 ft. over W. slope.
 30.60 Wash, 20 lks. wide, course NW. Asc. 80 ft. over NE. slope.
 35.40 Spur, slopes NW. Desc. 69 ft. over SW. slope to
 40.06 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in ground
 to bedrock, deposit a stone marked with a cross (X) at
 base of post, and raise a mound of stone around post,
 for $\frac{1}{4}$ sec. cor. of secs. 26 & 35, marked on brass cap,


S26
 S35
 1925

Survey of Part (Completion) of Subdivision lines of T.13 N., R.1 E. 77


chains
 No bearing trees available.
 Desc. 245 ft. over SW. slope.
 52.60 Wash, 20 lks. wide, course NW. Asc. gradually over NE. slope.
 56.00 Spur, slopes NW. Desc. 189 ft. over SW. slope.
 67.60 East or left bank of Agua Fria River, 8 ft. high, brs. N. & S. Thence across river bed.
 69.00 Stream of running water, 100 lks. wide, 2 ins. deep, flows S.
 72.10 West or right bank of Agua Fria River, 8 ft. high, brs. N. & S. Leave river bed. Asc. 188 ft. over E. slope.
 78.50 Point of spur, slopes SE. Desc. slightly over SW. slope to
 80.12 Intersect the cor. of secs. 26, 27, 34 & 35.

Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, none except cottonwood & ash along river.
 Undergrowth, scrub oak, thornbush & cacti.

 N. 0° 1' W., on true line, bet. secs. 26 & 27.
 Over mountainous land, thru dense undergrowth.
 Asc. 167 ft. over SW. slope.
 7.35 Spur, slopes SE. Desc. 80 ft. over NE. slope.
 17.60 Head of wash, course E. Asc. 65 ft. over SE. slope.
 21.50 Spur, slopes E. Desc. 204 ft. over N. slope.
 25.80 Enter wash near head, course N. from SW. Thence in wash.
 29.80 Leave wash, course NE. from S.
 32.00 Stream of water 30 lks. wide, 2 ins. deep, course E., in center of wash, 300 lks. wide.
 Asc. 136 ft. over SW. slope to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in ground to bedrock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for 1/4 sec. cor. of secs. 26 & 27, marked on brass cap,



Asc. 90 ft. over SW. slope.
 44.70 Spur, slopes SE. Desc. 118 ft. over NE. slope.
 55.00 Wash, 10 lks. wide, course E. Asc. 211 ft. over SE. slope.
 62.20 Point of spur, slopes E. Desc. 114 ft. over NE. slope to
 68.92 Intersect S. bdy. of sec. 22 at a point 1.39 chs. N. 89° 40' W. from cor. of secs. 22 & 23, hereinafter described.
 At point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for closing cor. of secs. 26 & 27, marked on brass cap,



Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, S. of cor.

Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, none except some cottonwood & ash at 32.00 ch. station.
 Undergrowth, scrub oak, thornbush & cacti.

 From cor. of secs. 21 & 22,
 East, on random line, on S. bdrs. of secs. 22 and 23 for bearing only.
 158.28 Fall 92 lks. N. of cor. of secs. 23, 24, 25 & 26. Thence N. 89° 40' W. (true bearing) on S. bdy. of sec. 23 for distance only.

chains	
40.00	Set temp. $\frac{1}{4}$ sec. cor. of sec. 23.
80.00	Set temp. cor. of secs. 22 & 23.

	From $\frac{1}{4}$ sec. cor. of secs. 22 & 23, South, on random line, bet. secs. 22 & 23 (S. $\frac{1}{2}$) for distance only.
39.18	Intersect S. bdy. of sec. 23 at a point 1.14 chs. S. $89^{\circ}40'E$. from temp. cor. of secs. 22 & 23. The true lengths of the S. $\frac{1}{2}$ of line bet. secs. 22 & 23, and the S. bdy. of sec. 23 are therefore, 39.18 chs. and 78.86 chs. respectively.

	From cor. of secs. 23, 24, 25 & 26, N. $89^{\circ}40'W$, on true line, on S. bdy. of sec. 23. Over mountainous land, thru dense undergrowth. Desc. 324 ft. over SW. slope to
39.43	(Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for $\frac{1}{4}$ sec. cor. of sec. 23 only, marked on brass cap,
	<u>$\frac{1}{4}$ S23</u>
	1925
	Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor. Desc. slightly over SW. slope to
40.12	(Midpoint of N. bdy. of sec. 26) Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in ground to bedrock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor. of sec. 26 only, marked on brass cap,
	<u>$\frac{1}{4}$ S26</u>
	1925
	Desc. 124 ft. over S. slope
60.40	Spur, slopes SW. Desc. 250 ft. over W. slope.
75.50	East or left bank of Agua Fria River, 8 ft. high, brs. N. & S. Thence across river bed.
76.50	Stream of running water, 40 lks. wide, 2 ins. deep, course S.
77.55	West or right bank of Agua Fria River, 8 ft. high, brs. NW. & S. Leave river bed.
	Asc. 60 ft. over NE. slope to
78.86	Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in ground to bedrock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for cor. of secs. 22 & 23, marked on brass cap,
	T13N R1E <u>S22 S23</u> S26
	1925
	Land, mountainous. Soil, rocky, 4th rate. Timber, none except cottonwood along Agua Fria River. Undergrowth, scrub oak, thornbush manzanita & cacti.

	North, on true line, bet. secs. 22 & 23 (S. $\frac{1}{2}$) Over mountainous land, thru dense undergrowth. Desc. 30 ft. over NE. slope.
4.00	West or right bank of Agua Fria River, 8 ft. high, brs. NW. & SE. Thence across W. side of river bed.
16.20	West or right bank of Agua Fria River, 8 ft. high, brs. NE. & SW. Leave river bed. Asc. slightly to
16.70	Fence, brs. NE. & SW. Asc. 274 ft. over SE. slope.
18.50	Fence, brs. NW. & SE.
20.70	Same fence, Brs. NE. & SW.
22.40	Same fence, brs. E. & W.

Survey of Part (Completion) of Subdivision lines of T.13 N., R.1 E 79

chains
 33.40 Spur, slopes NE. Enter rolling land. Desc. 30 ft. over N. slope to
 39.18 Intersect the $\frac{1}{4}$ sec. cor. of secs. 22 & 23, hereinbefore described.

Land, mountainous & rolling.
 Soil, rocky, 3rd & 4th rate.
 Timber, none except cottonwood along Agua Fria River.
 Undergrowth, broomweed, scrub oak & manzanita.


From std. cor. of secs. 33 & 34 on S. bdy. of the Tp. (3rd Std. Par. N.) hereinbefore described,
 N. 0° 2' W., on true line, bet. secs. 33 & 34.
 Over mountainous land, thru dense undergrowth.
 Desc. 262 ft. over N. slope.

15.35 Wash, 20 lks. wide, course NE. Asc. 98 ft. over SE. slope.
 29.00 Spur, slopes NE. Desc. 114 ft. over NW. slope to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for $\frac{1}{4}$ sec. cor. of secs. 33 & 34, marked on brass cap,



Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
 Desc. 112 ft. over N. slope.


50.15 Wash, 20 lks. wide, course NE. Asc. 57 ft. over SE. slope.
 51.00 Road, brs. E. & W.
 53.00 Ridge, brs. NE. & SW. Asc. 63 ft. over W. slope to
 70.00 Descend gradually over NW. slope to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in ground to bedrock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for cor. of secs. 27, 28, 33 & 34, marked on brass cap,



Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scrub oak, manzanita, thornbush & cacti.

40.00 East, on random line, bet. secs. 27 & 34.
 80.04 Set temp. $\frac{1}{4}$ sec. cor.
 Run 3 lks. S. of the cor. of secs. 26, 27, 34 & 35.
 Thence
 S. 89° 59' W., on true line, bet. secs. 27 & 34.
 Over mountainous land, thru dense undergrowth.
 Asc. 388 ft. over E. slope.

38.00 Spur, slopes NE. Descend 34 ft. over NW. slope to
 40.02 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for $\frac{1}{4}$ sec. cor. of secs. 27 & 34, marked on brass cap,



Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
 Desc. 314 ft. over NW. slope.

50.70 Wash, 30 lks. wide, course NE. Asc. 242 ft. over SE. slope.
 61.54 Ridge, brs. NE. & SW.
 From this point, the N.E.C. Cor. of "Admiral" patented

80 Survey of Part (Completion) of Subdivision lines of T.13 N., R.1 E.

chains	lode mining claim, Mineral Survey No. 1747, bears S. 67° 7' E., 20.75 chs. dist.
80.04	Desc. 187 ft. over NW. slope to Intersect the cor. of secs. 27, 28, 33 & 34.
	Land, mountainous. Soil, rocky, 4th rate. Timber, none. Undergrowth, scrub oak, manzanita & cacti.

	N. 0° 2' W., on true line, bet. secs. 27 & 28. Over mountainous land, thru dense undergrowth. Desc. 182 ft. over NW. slope.
18.85	Wash, 40 lks. wide, course NE. Enter rolling land. Asc. gradually over E. slope.
21.20	Telephone line, brs. NE. & SW. Small house brs. W. about 2 chs. dist.
32.20	County highway, brs. NE. & SW.
32.70	Fence cor. from which fences extend NW. & SW.
34.35	Wash, 100 lks. wide, course SE. Asc. 28 ft. over S. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for $\frac{1}{4}$ sec. cor. of secs. 27 & 28, marked on brass cap,
	$\begin{array}{c} \frac{1}{4} \\ \hline S28 \mid S27 \\ \hline 1925 \end{array}$
	Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. Asc. 20 ft. over S. slope.
42.50	Spur, slopes SE. Desc. 34 ft. over NE. slope.
47.20	Power line, brs. NE. & SW.
51.95	Telephone, line, brs. NE. & SW.
65.35	Wash, 20 lks. wide, course SE. Asc. gradually over SW. slope to
69.42	Intersect the S. bdy. of sec. 21 at a point 1.87 chs. West from the cor. of secs. 21 & 22, hereinbefore described. At point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for closing cor. of secs. 27 & 28, marked on brass cap,
	$\begin{array}{c} T13N R1E \\ \hline S21 \\ \hline S28 \mid S27 \\ \hline C \mid C \\ \hline 1925 \end{array}$
	Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, S. of cor.
	Land, mountainous & rolling. Soil, rocky, 4th rate. Timber, none. Undergrowth, scrub oak, thornbush & cacti.

	From cor. of secs. 22 & 23, hereinbefore described, N. 89° 40' W., on true line, on S. bdy. of sec. 22 (E. $\frac{1}{2}$) Over mountainous land, thru dense undergrowth. Asc. 387 ft. over NE. slope.
1.39	Intersect the subdivision line bet. secs. 26 & 27, surveyed N. 6° 1' W. Closing cor. of said secs. established at this point as hereinbefore described.
17.25	East edge of top of ridge, brs. NW. & SE. Thence over nearly level top of ridge.
28.60	West edge of top of ridge, brs. N. & S. Leave top of ridge. Desc. 219 ft. over W. slope to
39.71	(Midpoint of S. bdy. of sec. 22) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 22 only, marked on brass cap,

chains

1/4 S22


1925

Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, N. of cor.

Land, mountainous.
Soil, rocky, 4th rate.
Timber, none.
Undergrowth, scrub oak & cacti.

From std. cor. of secs. 32 & 33 on the S. bdy. of the Tp.,
(3rd Std. Par. N.), hereinbefore described,
N. 0° 2' W., on true line, bet. secs. 32 & 33.
Over rolling land, thru scattering undergrowth.
Asc. gradually over SE. & E. slopes.


- 0.20 Telephone line, brs. NE. & SW.
- 13.70 Telephone line, brs. NE. & SW.
- 14.90 A.T. & S.F. R.R. (Prescott & Eastern Div.) brs. N. 30° E. & S. 30° W.
- 18.00 Wire fence, brs. NE. & SW.
- 18.20 Wash, 20 lks. wide, 1 ft. deep, course NE. Asc. 166 ft. over SE. slope.
- 35.70 Spur, slopes E. From this point, Cor. No. 2 of "Montezuma" patented lode mining claim, Mineral Survey No. 3234, brs. S. 48° 35' E., 7.70 chs. dist. At record course & dist. from said claim cor. (1.41 chs. S. 41° 2' E.) make diligent search for U.S.L.M. No. 1538 and fail to find any trace of same.
- 40.00 Desc. 21 ft. over NE. slope to Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for 1/4 sec. cor. of secs. 32 & 33, marked on brass cap,



1925

Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.
From this cor.,
Railroad section house brs. N. 72 1/2° E. about 12 chs. dist.
A house brs. S. 86° E. about 28 chs. dist.
A house brs. N. 22 1/2° E. about 16 chs. dist.

- 49.80 Desc. 132 ft. over NE. slope. Wash, 10 lks. wide, course SE. Asc. gradually over rolling SE. slope to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in ground to bedrock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for cor. of secs. 28, 29, 32 & 33, marked on brass cap,



1925

From this cor., U.S. Geological Survey Bench Mark No. 4740 brs. S56° 23' E. 17.79 chs. dist.

Land, rolling.
Soil, rocky, 4th rate.
Timber, none.
Undergrowth, scrub oak & cacti.

- 40.00 East, on random line, bet. secs. 28 & 33. Set temp. 1/4 sec. cor.
- 80.00 Intersect the cor. of secs. 27, 28, 33 & 34. Thence, West, on true line, bet. secs. 28 & 33.

82 Survey of Part (Completion) of Subdivision lines of T.13 N., R.1 E.

chains Over mountainous land, thru dense undergrowth.
 Desc. 185 ft. over NW. slope.
 8.50 Power line, brs. NE. & SW.
 10.20 Telephone line, brs. NE. & SW.
 10.40 Wash, 50 lks. wide, course NE., in bottom of ravine.
 Asc. 113 ft. over SE. slope.
 14.35 Intersect East side line (3-4) of "Montezuma" patented
 lode mining claim, Mineral Survey No. 1673, at a point
 7.20 chs. N. $8\frac{1}{2}^{\circ}$ E. from Cor. No. 4 thereof.
 Thence across said claim.
 17.00 West edge of ravine, brs. NE. & SW. Leave mountainous
 and enter rolling land. Asc. gradually over E. slope.
 23.54 Intersect West side line (1-2) of "Montezuma" patented
 lode mining claim, Mineral Survey No. 1673 at a point
 5.84 chs. N. $8\frac{1}{2}^{\circ}$ E. from Cor. No. 1 thereof.
 Leave patented mineral land.
 25.10 Power line, brs. NE. & SW.
 30.30 Telephone line, brs. NE. & SW.
 32.10 County highway, brs. NE. & SW.
 36.00 Telephone line, brs. N. & S.
 36.30 A.T. & S.F. R.R. (Prescott & Eastern Div.) brs. N. & S.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in ground
 to bedrock, deposit a stone marked with a cross (X) at
 base of post, and raise a mound of stone around post,
 for $\frac{1}{4}$ sec. cor. of secs. 28 & 33, marked on brass cap,

S28
 $\frac{1}{4}$ ———
 S33
 1925

67.00 Continue over rolling land. Asc. 100 ft. over E. slope.
 Old road, brs. N. & S.
 71.40 Spur, slopes SE. Desc. 25 ft. over SW. slope to sec. cor.
 75.00 Fence, brs. NW. & SE.
 80.00 Intersect the cor. of secs. 28, 29, 32 & 33.

Land, mountainous & rolling.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scrub oak & cacti.

N. 0° 2' W., on true line, bet. secs. 28 & 29.
 Over rolling land, thru dense undergrowth.
 Asc. 103 ft. over SW. slope.
 3.20 Wire fence, brs. NW. & SE.
 9.90 Spur, slopes E. Desc. 166 ft. over N. slope.
 20.50 Wash, 20 lks. wide, course NE. Asc. 60 ft. over S. slope to
 $\frac{1}{4}$ sec. cor.
 32.50 Old road, brs. NW. & SE.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in ground
 to bedrock, deposit a stone marked with a cross (X) at
 base of post, and raise a mound of stone around post,
 for $\frac{1}{4}$ sec. cor. of secs. 28 & 29, marked on brass cap,

$\frac{1}{4}$
 S29 | S28
 1925

41.20 Asc. 26 ft. over S. slope.
 Old road, brs. E. & W.
 42.00 Ridge, brs. E. & W. Desc. 30 ft. over N. slope
 48.00 Wash, 10 lks. wide, course E. Asc. 53 ft. over SE. slope.
 62.30 Spur, slopes E. from SW. Desc. 80 ft. over NW. slope to
 69.50 Intersect the S. bdy. of sec. 20 at a point 1.47 chs. West
 from cor. of secs. 20 & 21, hereinbefore described.
 At point of intersection, set an iron post, 3 ft. long,
 2 ins. in diam., 24 ins. in ground, for closing cor. of
 secs. 28 & 29, marked on brass cap,

Survey of Part (Completion) of Subdivision lines of T.13 N., R.1 E.

chains

T13N R1E
S20

S29 | S28
C | C

1925

Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, S. of cor.

Land, rolling.
Soil, rocky, 4th rate.
Timber, none.
Undergrowth, scrub oak & cacti.

-
- From std. cor. of secs. 31 & 32 on the S. bdy. of the Tp.,
(3rd Std. Par. N.) hereinbefore described,
N. 0° 3' W., on true line, bet. secs. 31 & 32.
Over rolling & mountainous land, thru dense undergrowth.
Asc. gradually over S. slope.
- 3.00 Leave undergrowth, brs. E. & W.
 - 4.00 A.T. & S.F. R.R. (Prescott & Eastern Div.) brs. E. & W.
 - 5.00 Telephone line, brs. E. & W.
 - 7.10 Power line, brs. E. & W.
 - 10.00 Foot of steep slope brs. E. & W. Asc. 375 ft. over SE. slope to 1/4 sec. cor.
 - 39.95 Intersect East side line (3-4) of "Yankee Girl" patented lode mining claim, Mineral Survey No. 1597 at a point 6.28 chs. S. 26° 27' W. from Cor. No. 4 thereof. Thence across "Yankee Girl" and "Silverton" patented lode mining claims, Mineral Survey No. 1597.
 - 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for 1/4 sec. cor. of secs. 31 & 32, marked on brass cap,

S31 | S32

1925

Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.

- Asc. 125 ft. over SE. slope.
- 48.36 Ridge, brs. E. & W. From this point, U.S.L.M. No. 1597, which is an outcropping boulder 8x4x3 ft. above ground, marked USLM No 1597 on S. face, brs. S. 65° 31' W., 6.51 chs. dist.
 - Desc. 291 ft. over N. slope.
 - 54.50 Power line, brs. NW. & SE.
 - 56.00 An old mine shaft brs. W. about 1.00 ch. dist.
 - 67.64 Intersect North end line (2-3) of "Silverton" patented lode mining claim, Mineral Survey No. 1597, at a point 2.77 chs. S. 82° W. from Cor. No. 3 thereof. Leave patented mineral land.
 - 68.10 Wash, 10 lks. wide, course NE. Asc. 51 ft. over SE. slope to
 - 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 29, 30, 31 & 32, marked on brass cap,

T13N R1E
S30 | S29

S31 | S32

1925

Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling & mountainous.
Soil, rocky, 4th rate.
Timber, none.
Undergrowth, scrub oak & cacti.

84 Survey of Part (Completion) of Subdivision lines of T.13 N., R.1 E.


chains	East, on random line, bet. secs. 29 & 32.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.14	Fall 5 lks. N. of cor. of secs. 28, 29, 32 & 33. Thence, N. $89^{\circ}58'$ W., on true line, bet. secs. 29 & 32. Over mountainous land, thru dense undergrowth. Asc. 183 ft. over S. & SE. slopes.
21.40	Spur, slopes NE. Desc. 20 ft. over NW. slope.
25.00	Asc. 65 ft. over N. slope.
30.80	Desc. 43 ft. over NW. slope.
36.70	Wash, 30 lks. wide, course NE. Asc. 60 ft. over SE. slope to
40.07	Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in ground to bedrock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor. of secs. 29 & 32, marked on brass cap,
	$\frac{1}{4} \frac{S29}{S32}$ 1925
	Asc. 70 ft. over SE. slope.
48.00	Point of spur, slopes S. Desc. 12 ft. over SW. slope.
49.20	Wash, 20 lks. wide, course SE. Asc. 240 ft. over SE. slope to sec. cor.
68.20	Fence, brs. NE. & SW.
80.14	Intersect the cor. of secs. 29, 30, 31 & 32.
	Land, mountainous. Soil, rocky, 4th rate. Timber, none. Undergrowth, scrub oak & cacti.

	West, on random line, bet. secs. 30 & 31.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
85.38	Fall 37 lks. S. of the cor. of secs. 30 & 31 on the W. bdy. of the Tp. (G. & S. R. Meridian), hereinbefore described, Thence, S. $89^{\circ}45'$ E., on true line, bet. secs. 30 & 31. Over mountainous land, thru dense undergrowth. Desc. 266 ft. over SE. slope.
11.00	Old road, brs. N & S.
21.00	Wash, 20 lks. wide, course NE. Asc. 111 ft. over NW. slope to $\frac{1}{4}$ sec. cor.
33.40	Telephone line, brs. NW. & SE.
45.38	Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground to bedrock, deposit a stone, marked with a cross (X) at base of post, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor. of secs. 30 & 31, marked on brass cap,
	$\frac{1}{4} \frac{S30}{S31}$ 1925
	Asc. 287 ft. over NW. slope.
75.55	Spur, slopes NE. Desc. 172 ft. over SE. slope to
85.38	Intersect the cor. of secs. 29, 30, 31 & 32.
	Land, mountainous. Soil, rocky, 4th rate. Timber, none. Undergrowth, scrub oak & cacti.


	N. $0^{\circ}3'$ W., on true line, bet. secs. 29 & 30. Over mountainous land, thru dense undergrowth. Asc. 34 ft. over SE. slope.
3.00	Spur, slopes NE. Desc. 159 ft. over NW. slope.
14.65	Wash, 10 lks. wide, course NE. Asc. 20 ft. over SE. slope.

Survey of Part (Completion) of Subdivision Lines of T.13 N., R.1 E. 85

- chains
- 14.78 From this point, Cor.No.4 of "Gopher" patented lode mining claim, Mineral Survey No.69, brs.S.19°54'E., 3.04 chs.dist.
- 16.00 Spur, slopes NE. Desc.219 ft.over NW.slope.
- 33.30 Wash, 20 lks.wide, course NE. Asc.28 ft.over SE.slope to $\frac{1}{4}$ sec.cor.
- 37.00 Mine shaft brs. West about 1.00 ch.dist.
- 40.00 Set an iron post, 3 ft.long, 1 in.in diam., 24 ins.in ground, for $\frac{1}{4}$ sec.cor.of secs.29 & 30, marked on brass cap,



- Raise a mound of stone, 3 ft.base, 1 $\frac{1}{2}$ ft.high, W.of cor. From this cor., U.S.Geological Survey Bench Mark No.5237 brs.S.77° 42'W., 11.08 chs.dist.
- Chimney of a house brs.N.62°20'E.about 20 chs.dist.
- Mouth of tunnel brs.S.6° 4'W.about 25 chs.dist.
- North end of cement tank brs.N.66°55'E.about 15 chs.
- Cor.No.6 of "Sink To Rise" patented lode mining claim, Mineral Survey No.813 brs.N59°W., 1.59 chs.dist.
- Asc.57 ft.over SE.slope to
- 44.60 Telephone line brs.NE. & SW. Leave mountainous and enter rolling land. Asc.gradually over SE.slope
- 46.40 SW.cor.of house brs. E. 20 lks.dist.
- 48.50 Spur, slopes NE. Road, brs. NE. & SW. Desc.53 ft.over NW.slope.
- 60.70 North end of house on line.
- 61.93 Wash, 30 lks.wide, course NE. Asc.gradually over SE.slope to
- 69.54 Intersect the S.bdy.of sec.20 at a point 3.27 chs. East from cor.of secs.19 & 20, hereinbefore described. At point of intersection, set an iron post, 3 ft.long, 2 ins.in diam., 24 ins.in ground, for closing cor.of secs.29 & 30, marked on brass cap,



Raise a mound of stone, 3 ft.base, 1 $\frac{1}{2}$ ft.high, S.of cor.

Land, mountainous & rolling.
 Soil, rocky, 4th rate.
 Timber, none.
 Undergrowth, scrub oak & cacti.

NOTE

MINERAL INTERSECTIONS.

A most diligent search was made for satisfactory evidence of a number of the earlier mineral surveys in this township, but no trace of many of the claim cors.could be found. Wherever the two terminal cors.of a claim line were located, the intersection of the subdivision line with the claim line has been recorded in the foregoing notes, at points of entering and leaving a patented claim or group of claims. Where intersections could not be obtained, every effort was made to locate and tie in such claim cors. as were available.

FINAL TEST OF INSTRUMENT.

December 2, 1925, at same station as described on page 2 hereof, examine the adjustments of the transit and find no errors.

at 9h.00m., a.m., app.t., set off $34^{\circ}32'N.$ on the lat. arc, $21^{\circ}55'S.$ on the decl. arc, and determine a meridian with the solar, which agrees with the true meridian. At app. noon, with the lat. arc unchanged, observe the sun on the meridian and obtain a reading on the decl. arc of $21^{\circ}57'S.$, which agrees with the computed decl. of the sun.

at 3h.00m., p.m., app.t., with the lat. arc unchanged, set off $21^{\circ}57'S.$ on the decl. arc, and determine a meridian with the solar, which agrees with the true meridian. As all of the observations made during the usual hours of solar work agree within $1\frac{1}{2}'$ with the true meridian, conclude that the adjustments of the instrument have been maintained without error throughout the surveys described in the foregoing notes.

GENERAL DESCRIPTION.

This township is situated in the upper valley of the Agua Fria River, and the surface is rolling and mountainous. The elevation ranges from 4500 to 5700 ft. above sea level.

The drainage throughout the township is into the Agua Fria River, which carries an intermittent flowing stream course southerly thru the E. $\frac{2}{3}$ of the township.

The soil ranges from rocky 4th rate in the mountainous portion to sandy loam, 2nd & 1st rate in the rolling land in the valleys.

Over the hilly and mountainous portion is a scattered growth of scrub cedar and pinion, of commercial value for firewood only.

The slopes are covered generally with a dense growth of scrub oak, sagebrush, thornbush, broomweed, manzanita and cacti. In the valleys the undergrowth consists of scattering scrub oak & sagebrush.

The only water suitable for drinking and cooking purposes is found in the Agua Fria valley. Several of the washes in the western part carry running streams of water, but this water has been polluted by refuse from the many mines in this region.

This region has been mined for many years, and is still being prospected and developed for mineral, some silver, but chiefly copper, which is strongly evidenced thru the mountainous portion.

The principal town is Humboldt, in sec. 14, where a large smelter is located. Dewey is located in sec. 3.

The town of McCabe, which is now at a standstill, is located in sec. 29. Huron is in sec. 33.

The Sante Fe Railroad (Prescott & Eastern Division) bearing northerly and southerly, passes thru the east central part of the township.

An improved county highway, part of what is known as the "Black Canyon Route" between Prescott & Phoenix, follows the general course of the railroad thru the township.

The chief industries of this township are mining and stock raising.

NOTICE OF MINING LOCATION
LODE CLAIM

To All Whom It May Concern:

This Mining Claim, the name of which is the Independence Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purpose of exploration and purchase by Charles Mackling a Citizen of united states the undersigned, on the twelvth day of June 1908.

The length of this claim is fifteen hundred 1500 feet, and I claim one hundred and seventy 170 feet in an northerly direction and thirteen hundred and thirty 1330 feet in a southerly direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim, together with three hundred (300) feet in width of the surface grounds, on each side of the center of said vein. The general course of the lode deposit and premises is from the northerly to the southerly.

This claim is situated and located in the Big Bug Mining District, in Yavapai county, in the Territory of Arizona, about one and two third mile in a westerly direction from dewey or cherry creek station P. and E.R.R.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a monument of stones with stak at a point in an northerly direction one hundred and seventy feet from the discovery shaft (at which this notice is posted), being in the center of the north end line of said claim; thence easterly 300 feet to a monument of stones, being the northeast corner of said claim, thence southerly 1500 feet to a monument of stones, being at the southeast corner of said claim; thence westerly 300 feet to a monument of stones at the center of the south end of said claim; thence westerly 300 feet to a monument of stones, being at the southwest corner of said claim; thence northerly 1500 feet to a monument of stones being the northwest corner of said claim; thence easterly 300 feet to the place of beginning.

All done under the provisions of Chapter Six, of Title XXXII, of the Revised Statutes of the United States, and of an Act, of the General Assembly of Arizona, entitled "An Act Concerning Mines," approved Marhh 20th, 1895, and amended March 2d 1899, and March 16th, 1901.

Dated and posted on the ground this 12th day of June 1908

Charles Mackling

Whitviess
A.C. Mackling

Filed and recorded at request of Chas. Mackling, June 24, A.D. 1908, at 9:00 o'clock A.M., Book 84 of Mines, page 399, Records of Yavapai County, Arizona.

(SEAL) J.C. Bradbury, County Recorder.
By John J. Reddick, Deputy Recorder.

NOTICE OF MINING LOCATION
LODE CLAIM

To All Whom It May Concern:

This Mining Claim, the name of which is the Second Independence Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by Charles Mackling the undersigned, on the twelve th day of June, 1908.

The length of this claim is fifteen hundred 1500 feet, and I claim seven hundred and fifty 750 feet in an northerly direction and seven hundred and fifty 750 feet in an southerly direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim, together with three hundred (300) feet in width of the surface grounds, on each side of the center of said vein. The general course of the lode deposit and premises is from the northerly to the souterly.

The claim is situated and located in the Big Bug Mining District, in Yavapai County, in the Territory of Arizona, about one and two thirds mile in a westerley direction from Dewey or cherry creek station on the P. and E.R.R. adjoining the Independence on the end center and two corners northley of independence End

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a monument of stones with stake at a point in an northerly direction seven Hundred and fifty feet from the discovery shaft (at which this notice is posted, being in the center of the north end line of said claim; thence easterly 300 feet to a monument of stones, being the northeast corner of said claim; thence southerly 1500 feet to a monument of stone, being at the southeast corner of said claim; thence westerly 300 feet to a monument of stones at the center of the south end of said claim; thence westerly 300 feet to a monument of stones, being at the southwest corner of said claim; thence northerly 1500 feet to a monument of stones being the northwest corner of said claim; thence easterly 300 feet to the place of beginning.

All done under the provisions of Chapter Six, of Title XXXII, of the Revised Statutes of the United States, and of an act of the General Assembly of Arizona, entitled "An Act Concerning Mines," approved March 20th, 1895, and amended March 2d, 1899, and March 16th, 1901."

Dated and posted on the ground this 12th day of June 1908

Charles Mackling

whitness

A.C.Mackling

Filed and recorded at regest of Chas.Mackling, June 24, A.D. 1908, at 9:00 o'clock A.M., Book 84 of Mines, page 400, Records of Yavapai county, Arizona.

(SEAL)

J.C.Bradbury, County Recorder.

By John J.Reddick, Deputy Recorder.

Between End Monuments - Northerly and Southerly Vein.

NOTICE OF MINING LOCATION.
LODE CLAIM.

TO ALL WHOM IT MAY CONCERN:

This mining claim, the name of which is the **THIRD INDEPENDENCE Mining Claim**, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purpose of exploration and purchase by Charles Mackling the undersigned, on the twelveth day of June 1908.

The length of this claim is fifteen hundred 1500 feet and (We or I) I claim one hundred and fifty 150 feet in an northerly direction, and thirteen hundred and fifty 1350 feet in a southerly direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim, together with three hundred (300) feet in width of the surface grounds, on each side of the center of said vein. The general course of the lode deposit and premises is from the northerly to the southerly. Ajoining east Boundaries of second independence and independence.

The claim is situated and located in the Big Bug Mining District, in Yavapai County, in the Territory of Arizona, about one, and two thirds, mile in a westerly direction from Dewey or Cherry Creek station of the P. and E. R. R.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a monument of stones with stake at a point in an northerly direction one hundred and fifty feet from the discovery shaft (at which this notice is posted, being in the center of the north end line of said claim; thence easterly 300 feet to a monument of stones, being the northeast corner of said claim; thence southerly 1500 feet to a monument of stones, being at the southeast corner of said claim; thence westerly 300 feet to a monument of stones at the center of the south end of said claim; thence westerly 300 feet to a monument of stones, being at the southwest corner of said claim; thence northerly 1500 feet to a monument of stones, being the northwest corner of said claim; thence easterly 300 feet to the place of beginning.

All done under the provisions of Chapter Six of Title XXXII, of the Revised Statutes of the United States and of an Act of the General Assembly of Arizona, entitled "An Act Concerning Mines," approved March 20th, 1895, and amended March 2d, 1899, and March 16, 1901.

Dated and posted on the ground this 12th day of June 1908
Charles Mackling
X

Whitness
A. C. Mackling

Filed and recorded at request of Chas. Mackling, June 24, A. D. 1908, at 9:00 o'clock A. M., Book 84 of Mines, page 401, Records of Yavapai County, Arizona.

J. C. Bradbury, County Recorder.
By John J. Reddick, Deputy Recorder.

=====

NOTICE OF MINING LOCATION
Lode Claim

To all Whom it May Concern:

This Mining Claim, the name of which is the English Coin Mine, Mining Claim, situate on lands belonging to the United States of American, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by Charles Mackling the undersigned, on the 26 day of March 1908

The length of this claim is fifteen Hundred 1500 feet, and I claim Six hundred and seventy 670 feet in a southerly direction and 830 feet in a Northerley direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim, together with six hundred 600 feet in width of the surface grounds, on each side of the center of said claim. The general course of the lode deposit and premises is from the Northerley to the Southerley 1500 feet.

The claim is situated and located in the Big Bug Mining District, in Yavapai County, in the Territory of Arizona, about one mile and 1-3 in a westerley direction from Cherry Creek station or dewey postoffice P and E.R.R.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at this claim Joins Alice Mineing claim on the east of the Alice at a point in a Southerley direction 670 feet from the discovery shaft (at which this notice is posted) being in the center of the English coin mine end line of said claim; thence 300 feet to a monument, being the southwesterley corner of said claim; thence 1500 feet to a steak, being at the Northwesterley corner of said claim; thence 300 feet to a steak at the center of the Northley end of said claim; thence 300 feet to a stake, being at the south westerley corner of said claim; thence 1500 feet to a stake at the southeasterley corner of said claim; thence 300 feet to the place of beginning.

All done under the provisions of Chapter Six, of Title XXXII of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona, approved March 16, 1901.

Dated and posted on the ground this 26 day of March 1908.

Witness Charles Mackling
Mrs. A. C. Mackling

Filed and recorded at request of Charles Mackling, April 22, A.D. 1908, at 9:16 o'clock A.M., Book 84 of Mines, page 170, Records of Yavapai county, Arizona.

(SEAL)

J. C. Bradbury, County Recorder.
By John J. Reddick, Deputy Recorder.

Amended
Notice of Mining Location
Lode Claim

To all whom it may concern:

This mining claim the name of which is the Big Four Mining claim, situate on lands belonging to the United States of America and in which there are valuable mineral deposits, was entered upon and located for the purpose of exploration and purchase by Charles Mackling the undersigned, on the 17th day of January 1903.

The length of this claim is 1500 feet and I claim 750 feet in a Northerly direction and 750 feet in a southerly direction from the center of the discovery monument at which this notice is posted, lengthwise of the claim, together with Three Hundred feet in width of the surface grounds, on each side of the center of said claim. The general course of the lode deposit and premises is from the Northerly to the Southerly.

The claim is situated and located in the Big Bug Mining District in Yavapai county in the Territory of Arizona about 1 3-4 miles in a Northwest direction from Cherry Creek Station P & E.R. R. and east of Black Copper joining S.E. corner of Black Copper mine and lies on west side of Minnie claim.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at discovery monument which is at a point in a westerly direction. One hundred feet from the discovery shaft; thence 750 feet in a Northerly direction to mon. of stones being in the center of the northerly end line of said claim; thence Westerly 300 feet to a monument of stones being the North west corner of said claim; thence southerly 750 feet to a monument of stones at the center of the West side line of said claim; thence Southerly 750 feet to a monument of stones being at the South west corner of said claim; thence easterly 300 feet to a monument of stones at the center of the south end of said claim; thence Easterly 300 feet to a monument of stones being at the south east corner of said claim; thence Northerly 750 feet to a monument of stones being at the center of the East side line of said claim; thence Northerly 750 feet to a monument of stones at the Northeast corner of said claim; thence easterly 300 feet to a mon. of stones at center of North end of said claim; thence Southerly 750 feet to the place of beginning.

All done under the provisions of Chapter Six of Title XXXII, of the Revised Statutes of the United States and of an Act of the General Assembly of Arizona entitled "An Act Concerning Mines," approved March 20th, 1895, and amended March 2d, 1899.

This is an Amended Location Notice of the Big Four Mining Claim, located by Charles Mackling on the 17th day of June 1902, and recorded in Book 63 of Records of Mines, at page 477 in the office of the County Recorder of the aforesaid County of Yavapai to which reference is hereby made and this Amended Location Notice is made and posted to correct errors in the description in the said original Location Notice.

Dated and posted on the ground this 17th day of January 1903.

Charles Mackling

Filed and recorded at request of Charles Mackling Jan. 17" A. D. 1903 at 4:10 o'clock P.M. Book 64 of Mines pages 216-217-218. Records of Yavapai County, Arizona.

P. J. Farley
County Recorder.

(SEAL)

By P. J. Keohane
Deputy Recorder.

NOTICE OF MINING LOCATION

Cross LODE CLAIM.

To All Whom It May Concern:

This Mining Claim, the name of which is the Australian Mine Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by Charles Mackling the undersigned, on the 12th day of April 1908

The length of this claim is fifteen Hundred 1500 feet, and I claim for Hundred and twenty 420 feet in a westerley direction and 1080 ten hundred & eighty feet in a easterley direction from the center of the discovery crosscut, at which This notice is posted, lengthwise of the claim, together with 300 Hundred feet in width of the surface grounds on each side of the center of said claim.

The general course of the lode deposit and premises is from the Easterley to the Westerley. The claim is situated and located in the Big Bug Mining District, in Yavapai County, in the Territory of Arizona, about one mile 1-3 in a westerley direction from Cherry creek station P. & E.R.R. station or Dewey postoffice.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at cut; cross Lod Easterley to the Westerley on the west Joins Alice clane on North Joins English coin and Big 4 claim at a point in a westerley direction 420 feet from the discovery cut (at which this notice is posted), being in the center of the Austrialian Mine end line of said claim; thence North 300 feet to a monument, being the Northley Westerley corner of said claim; thence 1500 Easterley feet to a monument, being at the N.east corner of said claim; thence 300 feet to a monument at the center of the Easterley end of said claim; thence southerley 300 feet to a monument, being at the south East corner of said claim; thence west-erley 1500 feet to a monument at the south westerley corner of said claim; thence 300 Northley 300 feet to the place of beginning.

All done under the provisions of Chapter Six, of Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona," approved March 16, 1901.

Dated and posted on the ground this twelve day of April, 1908.

Charles Mackling
Witness Mrs. A. C. Mackling

Filed and recorded at request of Charles Mackling, April 22, A.D. 1908, at 9:16 o'clock A.M., Book 84 of Mines, page 171, Records of Yavapai County, Arizona.

(SEAL) J. C. Bradbury, County Redorder.

By John J. Reddick, Deputy Recorder.

Buckeye

Amended
Notice of Mining Location
Lode Claim

To All whom it may concern:

This mining claim the name of which is the Buckeye mining claim, situate on lands belonging to the United States of America and in which there are valuable mineral deposits, was entered upon and located for the purpose of exploration and purchase by Charles Mackling the undersigned, on the 17th day of January 1903.

The length of this claim is 1500 feet and I claim 580 feet in a northerly direction and 920 feet in a southerly direction from the center of the discovery monument at which this notice is posted lengthwise of the claim, together with three hundred feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposit and premises is from the northerly to the southerly,

The claim is situated and located in the Big Bug Mining District, in Yavapai County in the Territory of Arizona about 1 3-8 miles in a north westerly direction from Cherry Creek Station P. & E. R.R. and east of Keystone claim and lying parallel with same.

The surface boundaries of the claim are marked upon the grounds as follows: Beginning at discovery monument at which this notice is posted which is situated at a point in an easterly direction fifty feet from the discovery shaft thence northerly 580 feet to a monument of stone being in the center of the northerly end line of said claim; thence westerly 300 feet to a monument of stone being the North West corner of said claim; thence Southerly 750 feet to a monument of stones at the center of the West side line of said claim; thence Southerly 750 feet to a monument of stones being at the South west corner of said claim; thence Easterly 300 feet to a monument of stones at the center of the Southerly end of said claim; thence Easterly 300 feet to a monument of stones being at the South East corner of said claim; thence Northerly 750 feet to a monument of stones being at the center of the East side line of said claim; thence Northerly 750 feet to a monument of stones at the North east corner of said claim; thence Easterly 300 feet to a mon. of stones at the center of the North end of said claim; thence Southerly 580 feet to the place of beginning.

All done under the provisions of Chapter Six of Title XXXII, of the Revised Statutes of the United States and of an Act of the General Assembly of Arizona entitled "An Act Concerning Mines" approved March 20th 1895 and amended March 2d 1899

This is an Amended Location Notice of the Buckeye Mining Claim located by Charles Mackling on the 24th day of May 1902 and recorded in Book 63 of Records of Mines at page 203 in the office of the County Recorder of the aforesaid County of Yavapai to which reference is hereby made and this Amended Location Notice is made and posted to correct errors in the description in the said original Location Notice.

Dated and posted on the ground this 17th day of January 1903.
Charles Mackling

G Filed and recorded at request of Charles Mackling Jan. 17" A.D. 1903 at 4:10 o'clock P.M. Book 64 of Mines pages 215-216. Records of Yavapai County, Arizona.

(SEAL) P. J. Farley
County Recorder.
by P. J. Keohane
Deputy Recorder.

Keystone

Amended
Notice of Mining Location
Lode Claim

To all whom it may concern:

This mining claim, the name of which is the Keystone mining claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purpose of exploration and purchase by Chas. Mackling the undersigned on the 17th day of January 1903.

The length of this claim is 1500 feet and I claim 600 feet in a Northerly direction and 900 feet in a Southerly direction from the center of the discovery shaft at which this notice is posted, lengthwise of the claim together with Three Hundred feet in width of the surface grounds, on each side of the center of said claim. The general course of the lode deposit and premises is from the Northerly to the Southerly. The claim is situate and located in the Big Bug Mining District in Yavapai County, in the Territory of Arizona, about $1\frac{3}{4}$ miles in a North westerly direction from Cherry Creek Station on P. & E. R. Road and south of and adjoining the Champagne claim and lies south of Dry Creek.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a monument of stones at a point in a Northerly direction 600 feet from the discovery shaft (at which this notice is posted) being in the center of the Northerly end line of said claim; thence Westerly 300 feet to a monument of stones being the North west corner of said claim thence Southerly 750 feet to a monument of stones at the center of the West side line of said claim; thence southerly 750 feet to a monument of stones being at the South west corner of said claim; thence Easterly 300 feet to a monument of stones at the center of the Southerly end of said claim; thence easterly 300 feet to a monument of stones being at the South east corner of said claim; thence Northerly 750 feet to a monument of stones being at the center of the East side line of said claim; thence Northerly 750 feet to a monument of stones at the North east corner of said claim; thence Westerly 300 feet to the place of beginning.

All done under the provisions of Chapter Six of Title XXXII, of the Revised Statutes of the United States and of an Act of the General Assembly of Arizona entitled "An Act Concerning Mines" approved March 20th, 1895, and amended March 2d 1899.

This is an Amended Location Notice of the Keystone Mining Claim, located by Charles Mackling on the 1st day of May, 1902, and recorded in Book 63 of Records of Mines at page 18 in the office of the County Recorder of the aforesaid County of Yavapai to which reference is hereby made, and this Amended Location Notice is made and posted to correct errors in the description in the said original Location Notice.

Dated and posted on the ground this 17th day of January 1903.

Charles Mackling.

Filed and recorded at request of Charles Mackling, Jan. 17"
A.D. 1903 at 4:10 o'clock P.M. Book 64 of Mines pages 218-219-
220. Records of Yavapai County Arizona

P. J. Farley
County Recorder

(SEAL)

By P. J. Keohane
Deputy Recorder.

Champagne

Amended
Notice of Mining Location
Lode Claim.

To all whom it may concern:

This mining claim, the name of which is the Champagne Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits was entered upon and located for the purpose of exploration and purchase by Charles Mackling the undersigned, on the 17th day of January 1903

The length of this claim is 1500 feet and I claim 750 feet in a Northerly direction and 750 feet in a Southerly direction from the center of the discovery monument at which this notice is posted, lengthwise of the claim, together with Three Hundred (300) feet in width of the surface grounds on each side of the center of said claim. The general course of the lode deposit and premises is from the Northerly to the Southerly. The claim is situated and located in the Big Bug Mining District, in Yavapai county in the Territory of Arizona about 1 1/2 miles in a North westerly direction from Cherry Creek Station on the P. & E. Railroad and north of and adjoining the Keystone mine and lies north of Dry Creek.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at discovery monument at which this notice is posted, which is situated at a point in a Westerly direction 300 feet from the discovery shaft; thence Northerly 750 feet to a monument of stones being in the center of the North end line of said claim; thence Three Hundred feet to a monument of stones being the North west corner of said claim; thence Southerly 750 feet to a monument of stones at the center of the West side line of said claim; thence Southerly 750 feet to a monument of stones being at the South west corner of said claim thence Easterly 300 feet to a monument of stones at the center of the Southerly end of said claim; thence Easterly 300 feet to a monument of stones being at the Southeast corner of said claim; thence Northerly 750 feet to a monument of stones being at the center of the East side line of said claim; thence Northerly 750 feet to a monument of stones at the N. East corner of said claim; thence Westerly 300 feet to a mon. of stones at the center of the North end of said claim; thence Southerly 750 feet to the place of beginning.

All done under the provisions of Chapter Six of Title XXXII, of the Revised Statutes of the United States and of an Act of the General Assembly of Arizona entitled "An Act Concerning Mines," approved March 20th, 1895, and amended March 2d 1899.

This is an Amended Location Notice of the Champagne Mining Claim located by Chas. Mackling on the 2nd day of May, 1902 and recorded in Book 63 of Records of Mines at page 19 in the office of the County Recorder of the aforesaid County of Yavapai to which reference is hereby made and this Amended Location Notice is made and posted to correct errors in the description in the said original Location Notice.

Dated and posted on the ground this 17th day of January 1903

Charles Mackling

Filed and recorded at request of Charles Mackling Jan. 17 A.D. 1903 at 4:10 o'clock P.M. Book 64 of Mines, pages 220-221. Records of Yavapai County, Arizona.

(SEAL)

P. J. Farley
County Recorder.

By P. J. Keohane
Deputy Recorder.

NOTICE OF MINING LOCATION.

LODE CLAIM.

To All Whom It May Concern:

This Mining Claim, the name of which is the Stambo King Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by Charles Mackling the undersigned, on the third day of February 1910.

The length of this claim is fifteen Hundred 1500 feet and I claim six Hundred and twenty 620 feet in an northerly direction and Eight Hundred and Eighty 880 feet in a Southerly direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim, together with three hundred (300) feet in width of the surface grounds, on each side of the center of said vein. The general course of the lode deposit and premises is from the North-
erly to the Southerly Ajoining the End lines of the Stambo Mining Claim on the south End. The claim is situated and located in The Big Bug Mining District, in Yavapai County, in the Territory of Arizona, about half mile in a south westerley direction from Cherry Creek station or Dewey postoffice.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at a Monument of stones with stake at a point in an northerly direction Six Hundred and twenty feet from the discovery shaft (at which this notice is posted, being in the center of the North end line of said claim; thence Easterly 300 feet to a Monument of stones, being the northeast corner of said claim; thence Southerly 1500 feet to a Monument of Stones, being at the southeast corner of said claim; thence westerly 300 feet to a Monument of stones at the center of the south end of said claim; thence westerly 300 feet to a Monument of stones, being at the south west corner of said claim; thence northerly 1500 feet to a Monument of stones, being the North West corner of said claim; thence Easterly 300 feet to the place of beginning. stone monument with stake

All done under the provisions of Chapter Six, of Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled "An Act Concerning Mines," approved March 20th, 1895, and amended March 2d, 1899, and March 16th, 1901.

Dated and posted on the ground this third day of February 1910

Charles Mackling

Witness

J.C. Gilbert

Filed and recorded at request of Charles Mackling, February 17, A.D. 1910, at 9:02 o'clock A.M., Book 88 of Mines, page 34, Records of Yavapai county, Arizona.

J.C. Bradbury,
County Recorder.

(SEAL)

By W.E. Glenn,
Deputy Recorder.

STATE OF ARIZONA, }
County of Yavapai. } ss

I, GRACE CHAPMAN, County Recorder in and for the County of Yavapai, State of Arizona, and custodian of the records of said office, do hereby certify that the foregoing are full, true and correct copies of Notices of Mining Location, as follows:

Claim.	Book of Mines	Page
Buckeye (Amended)	64	215
Big Four (Amended)	64	216
Keystone (Amended)	64	218
Champagne (Amended)	64	220
English Coin	84	170
Australian	84	171
Independence	84	399
Second Independence	84	400

and of the whole thereof.

IN WITNESS WHEREOF I have hereunto set my hand and affixed the Official Seal of my said office in the City of Prescott, County of Yavapai, State of Arizona, this SIXTH day of APRIL, A.D., 1925.

(SEAL)

Grace Chapman,
County Recorder.

Involving H.E.035213)
William P.Wright)

BOOK 3810

STATE OF ARIZONA,)
County of Yavapai.)

Chas. Mackling being first duly sworn deposes and says:
That on the 3rd day of February, 1910, he filed Notice of Mining Location on the STAMBO KING Lode Mining claim situated in the Big Bug Mining District, Yavapai County, Territory, now State, of Arizona; Said mining claim being on mineral ground and being 600 feet in width and 1500 feet in length; That affiant did all the location work required by law of the Territory of Arizona, to effect a valid mining location and since that time has kept up the annual work required by law and is now the legal owner of said mining claim subject only to the paramount title of the United States therein; That the Location Notice of said STAMBO KING Lode Mining Claim is of record in the office of the County Recorder of Yavapai County, Arizona, in Book 88 of Mines at page 34; That a certified copy of the Location Notice of said mining claim is attached to and made a part of this affidavit.

That said mining claim is situated in the Southeast Quarter (SE $\frac{1}{4}$) of the Northwest Quarter (NW $\frac{1}{4}$) of Section 10, Township 13 N., Range 1 E., G. & S.R.B. & M., and this forty acre tract, to-wit: The Southeast Quarter (SE $\frac{1}{4}$) of the Northwest Quarter (NW $\frac{1}{4}$) of Section 10, Township 13 N., R. 1 E., G. & S.R.B. & M. is also embraced in the Stock-Raising Homestead Entry of William P. Wright, Humboldt, Arizona, Serial No. 035213.

Said William P. Wright has given notice of his intention to make final proof for his said Homestead Entry on the 8th day of September, 1920, before Alex L. Jones, U.S. Commissioner, Prescott, Arizona, and affiant hereby protests against the allowance of final proof of said William P. Wright in so far as the land embraced in said entry conflicts with affiant's STAMBO KING Lode Mining Claim is concerned and prays that patent do not issue to said William P. Wright for that portion of the Southeast quarter (SE $\frac{1}{4}$) of the Northwest Quarter (NW $\frac{1}{4}$) Section 10, Township 13 N., Range 1 E., G. & S.R. B. & M., embraced within the boundaries of the STAMBO KING Lode Mining Claim owned by affiant and that the land embraced in this mining claim be expressly excepted and excluded from said Stock-Raising Homestead Entry when patent is issued therefor.

(Signed) Charles Mackling

Subscribed and sworn to before me this 30th day of August, 1920.

(SEAL) My commission expires Dec. 31st, 1920.

A. K. Lee,
Notary Public.

STATE OF ARIZONA,) SS.
County of Yavapai.)

Philip Mishler and Wm. E. Pate being first duly sworn, each for himself and not one for the other, deposes and says that he is personally acquainted with affiant above named and has read the above and foregoing affidavit and knows the facts therein contained to be true and correct.

Philip Mishler
William E. Pate

Subscribed and sworn to before me this 30th day of August, 1920.

(SEAL) A. K. Lee,
Notary Public.

My commission expires Dec. 31st, 1920.

4-680

FIELD ASSISTANTS.
TO

Benjamin J. Kinsey, U.S. Surveyor.

NAMES.	CAPACITY.
Stanley S. Palmer	1st Chainman
John Boggs	1st Chainman
Frank Kiefer	2nd Chainman
Earl Endicott	2nd Chainman
Homer Middleton	Cornerman
Harold Arbury	Flagman

CERTIFICATE OF UNITED STATES SURVEYOR.

114

I, Benjamin J. Kinsey, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from ~~the U. S. Surveyor General~~ the U.S. District Cadastral Engineer for Group 136 Arizona bearing date of the 28th day of October, 19 25, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, ~~surveyed~~ resurveyed all those parts or portions of the Gila & Salt River Meridian in T.13 N., the 3rd Std.Parallel N. in R.1 E., the East bdy. and Subdivision lines of Township 13 North, Range 1 East, and Surveyed all those parts or portions of the Subdivision lines of T.13 N., R.1 E., and ten mining claims situate in sections 4, 9 & 10 of Township 13 North, Range 1 East of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in and by diagram on page 1 hereof the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said resurvey and survey ~~and survey~~ have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of ~~the U. S. Surveyor General~~ the U.S. District Cadastral Engineer for Group 136 Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such resurvey and survey.

Place: Phoenix, Arizona
 Date : July, 23, 1927.

Benjamin J. Kinsey
 U. S. Surveyor.

APPROVAL.

U.S. SUPERVISOR OF SURVEYS
 OFFICE OF THE ~~U. S. Surveyor General~~

Denver, Colo., October 29, 1927.

resurvey of
 The foregoing field notes of the ~~survey of~~ the Gila & Salt River Meridian thru T.13 N., the 3rd Std.Parallel N. thru R.1 E., and Part of the East bdy. and Subdivision lines of Township 13 North, Range 1 East, and of the Survey of Part (completion) of the Subdivision lines of T.13 N., R.1 E., and the Independence, 2nd Independence, 3rd Independence, Australian Mine, English Coin, Big Four, Keystone, Buckeye, Champagne and Stambo King lode mining claims in sections 4, 9 and 10 of T.13 N., R.1 E of the Gila and Salt River Base & Meridian, in the State of Arizona. executed by Benjamin J. Kinsey, U.S. Surveyor under his special instructions dated October 28, 1925 for Group 136 Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys and surveys describe, are hereby approved.

Frank A. Johnson
 U.S. Supervisor of Surveys.

~~but the foregoing transcript of the field notes of the above described surveys in~~
~~has been correctly copied from the original notes on file in this office.~~

~~U. S. Surveyor General~~