

OK 3

# FIELD NOTES

OF THE RETRACEMENT OF

*Part of the Boundary of the  
Fort Huachuca Military Reservation*

OF THE RESURVEY OF

*Part of the East Boundary*

AND OF THE SURVEY OF

*Part of the Boundary of the  
Fort Huachuca Military Reservation  
the West Boundary, Part of the North Bdy  
and Part of the Subdivision Lines of  
Township 23 South, Range 19 East*

*Of the Gila and Salt River Base and Meridian,*

In the State of *ARIZONA*

EXECUTED BY

*Benjamin J. Kinsey, U.S. Surveyor*

and

*Charles E. Hunter, U.S. Transitman*

*In the capacity of U. S. Surveyors., under Special Instructions dated July 1, 1926., issued by the District Cadastral Engineer to govern surveys included in Group No. 142 Arizona, which were approved by the Commissioner of the General Land Office, July 17., 1926., and Assignment Instructions dated February 1, 1927.*

*Retracement,  
Resurvey & Survey commenced February 11, 1927.*

*Retracement  
Resurvey & Survey completed March 24, 1927.*

3826

3826


1A

BOOK 3826

Book "A"

Group 142 - Arizona.


# INDEX DIAGRAM.

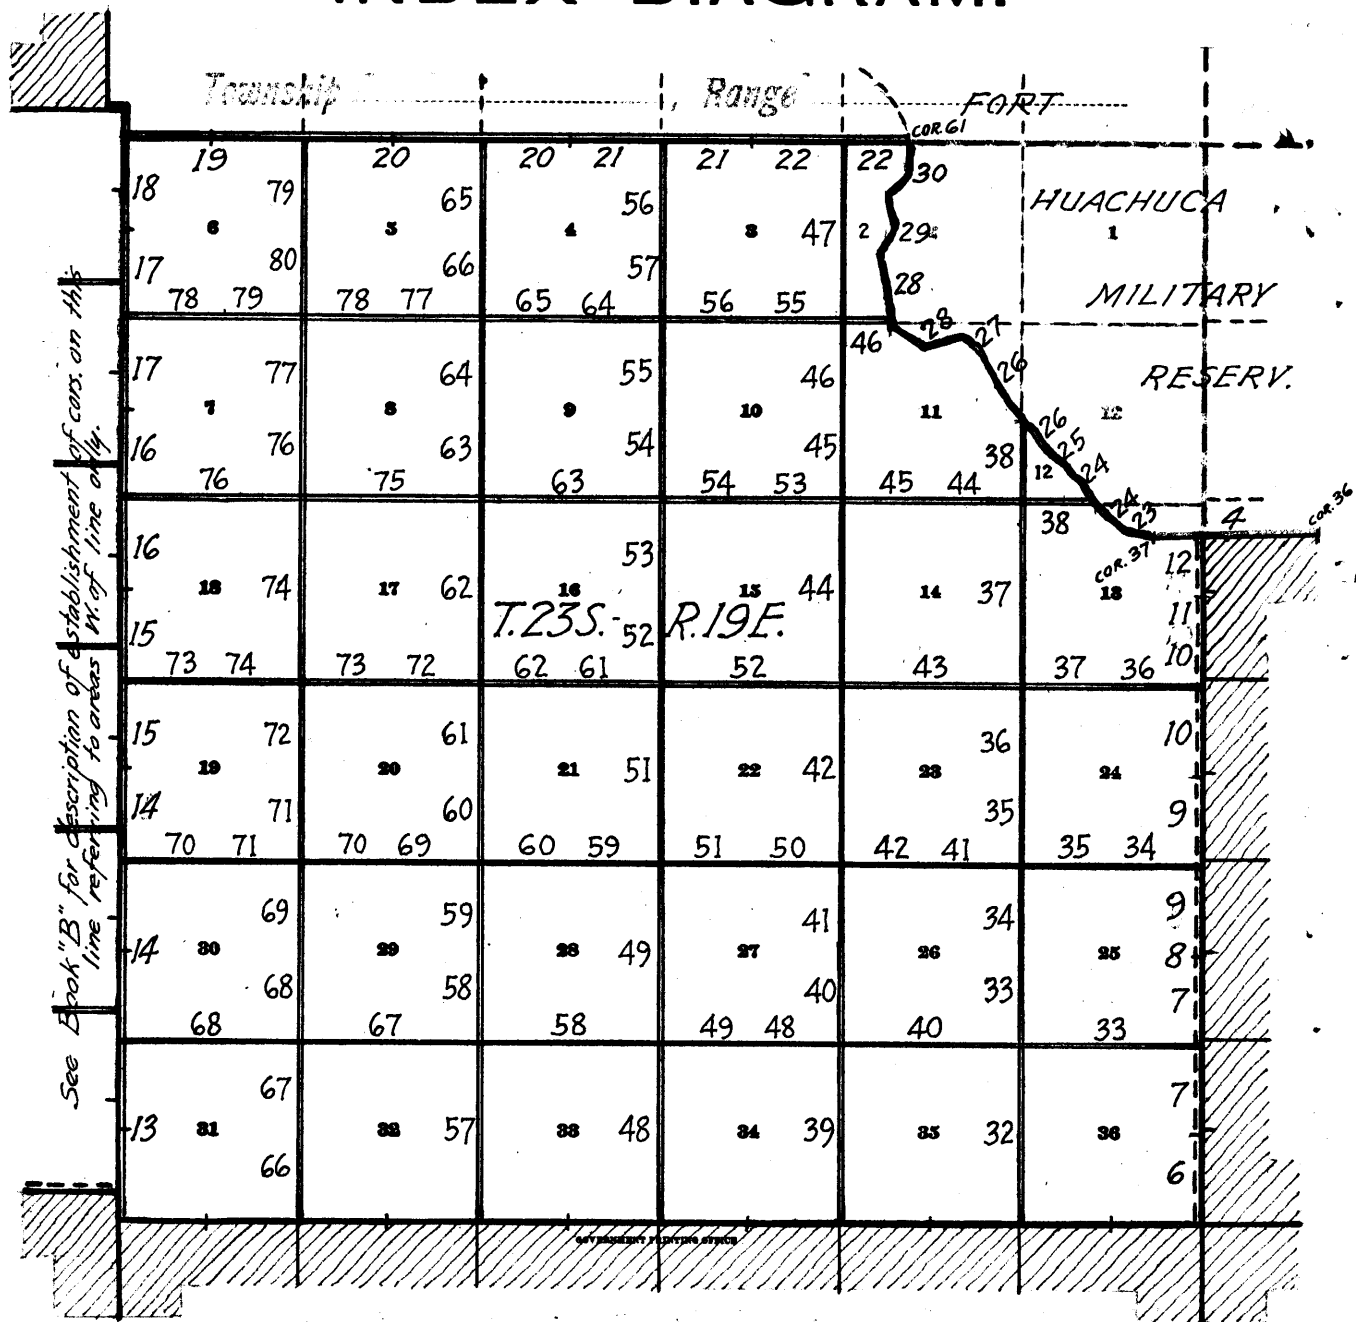

See Book "B" for description of establishment of corr. on this line referring to areas W. of line of corr.

- Surveyed under this group.
- Retraced under this group.
- Resurveyed under this group.
- Accepted surveys, retracements or resurveys.
- Unsurveyed.
- Areas surveyed as per accepted plats on file.

Book "A"  
 Group 142 - Arizona.  
 Township 23 South, Range 19 East.  
 - DATE - DIAGRAM -  
 1927

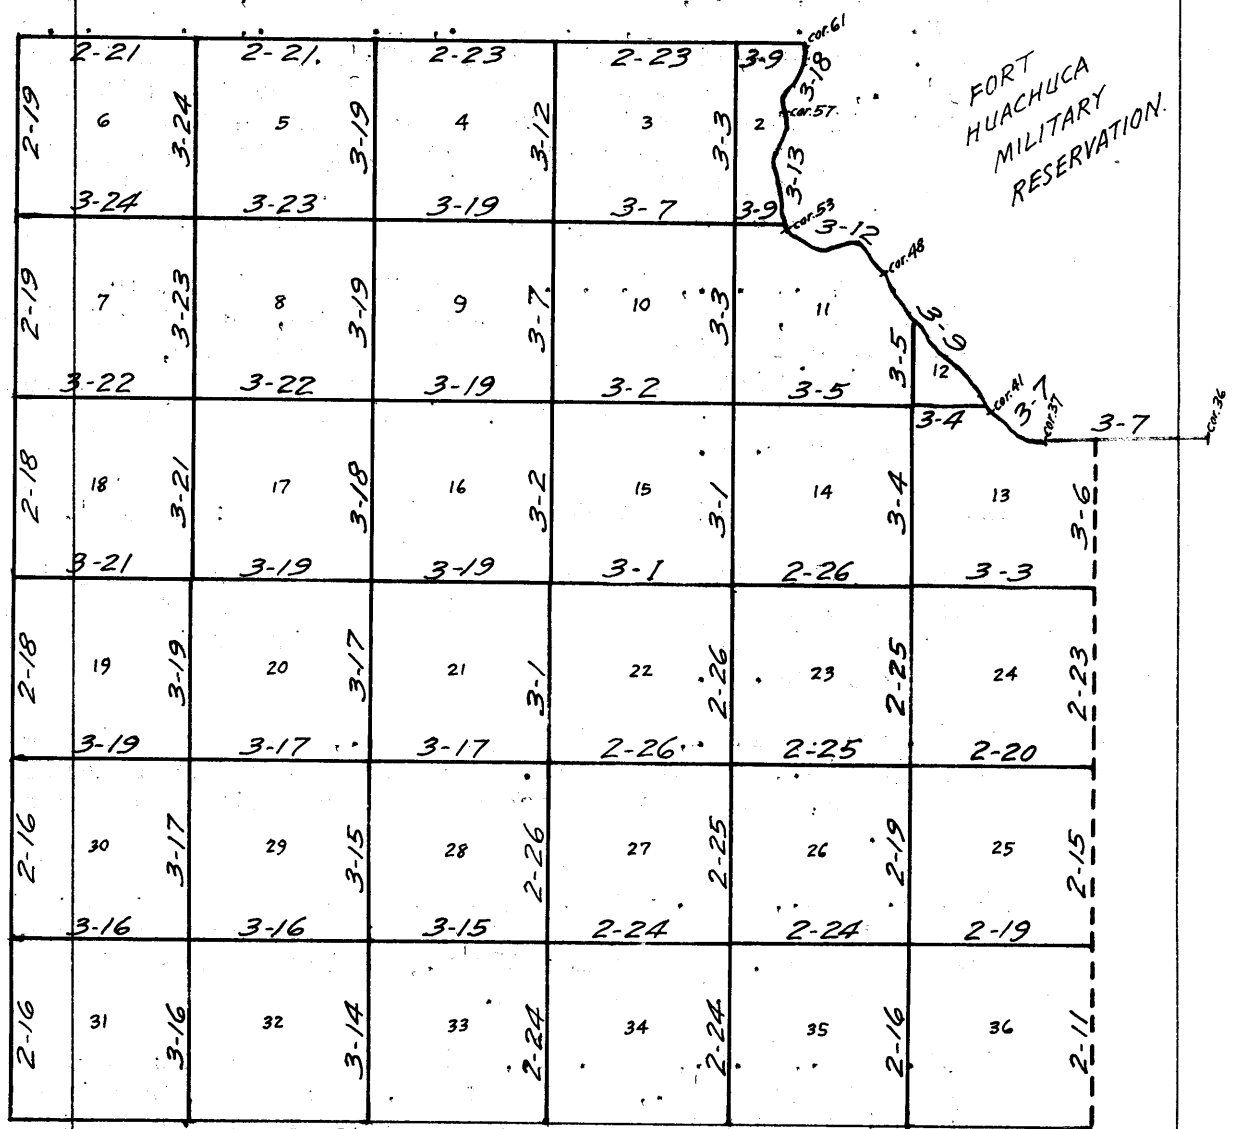

Surveyed by Sidney E. Blout, U.S.C.E. in 1923 under Group No. 119.

- Retraced by Benjamin J. Kinsey, U.S. Surveyor on dates shown thereon.
- - - Resurveyed by Benj. J. Kinsey, U.S.S. on dates shown thereon.
- Surveyed by Benj. J. Kinsey, U.S.S. on dates shown thereon.
- Surveyed by Charles E. Hunter, U.S. Transitman, on dates shown thereon.
- Accepted surveys, retracements or resurveys.

Surveys herein described were executed on dates shown on diagram on page 1 hereof, by Benjamin J. Kinsey, U.S. Surveyor and Charles E. Hunter, U.S. Transitman, using respectively Buff transits Nos. 9940 and 10125; the instruments are equipped with full vertical circle, Smith solar attachments and otherwise conform to the standard requirements of the General Land Office. Unless otherwise specified all azimuth determinations are accomplished with the solar attachment.

PRELIMINARY FIELD TEST  
of  
Buff Transit No. 9940  
by  
Benjamin J. Kinsey, U.S. Surveyor.

February, 9, 1927, at station in camp, near the  $\frac{1}{4}$  sec. cor. secs. 2 and 3, T. 23 S., R. 19 E., G. & S.R. Base and Meridian, Ariz., latitude  $31^{\circ} 27\frac{1}{2}'$  N., and longitude  $110^{\circ} 24'$  W., examine the adjustments of the transit and correct slight error in levels; then to test the workings of the solar attachment by comparing its indications with a true meridian established by observation upon Polaris at elongation, proceed as follows:

At 10h. 14m., p.m., l.m.t., observe Polaris at western elongation, making four observations, two each with the telescope in direct and reversed positions, and marking the mean point in the line thus determined by a tack driven in top of a stake, firmly set in the ground about 5 chs. N.

Azimuth of Polaris at western elongation :  $1^{\circ} 16' 11''$

February 10, 1927, lay off the azimuth of Polaris  $1^{\circ} 16'$  to the east and mark the meridian thus determined by a tack set in top of a stake driven firmly in the ground about 5 chs. N.

At 9h. 00m. a.m., app. t., set off  $31^{\circ} 27\frac{1}{2}'$  N., on the latitude arc,  $14^{\circ} 29\frac{1}{2}'$  S., on the decl. arc and determine a meridian with the solar which is found to agree with the true meridian.

At 12h. 00m., app. noon, with the latitude arc unchanged, observe the sun on the meridian; the resultant reading of the decl. arc is  $14^{\circ} 27\frac{1}{2}'$  S., which agrees with the computed decl. of the sun.

At 3h. 00m., p.m., app. t., with latitude arc unchanged set off  $14^{\circ} 24\frac{1}{2}'$  S., on the decl. arc and determine a meridian with the solar which is found to agree with the true meridian.

As all of the observations taken during the usual hours of solar work agree within  $1' 30''$  of the true meridian conclude that the adjustments of the instrument are in satisfactory condition.

All measurements are made with a Lallie steel tape 5 chs. in length. compared with a Lufkin standard and found correct. The measurements are made on the slope, the vertical angle determined and the slope measurements properly reduced to horizontal values.

## PRELIMINARY FIELD TEST

of

Buff Transit No. 9940

by

Charles E. Hunter, U.S. Transitman.

February 15, 1927, on same meridian as described on page 2 hereof, examine the adjustments of the transit and find no errors; then test the workings of the solar apparatus as follows:

At 4h. 00m., p.m., app. t., set off  $31^{\circ} 27\frac{1}{2}'$  N., on the latitude arc,  $12^{\circ} 43'$  S., on the decl. arc and determine a meridian with the solar which is found to agree with the true meridian.

February, 16, at 9h. 00m., a.m., app. t., set off  $31^{\circ} 27\frac{1}{2}'$  N. on the lat. arc,  $12^{\circ} 29'$  S., on the decl. arc and determine a meridian with the solar which agrees with the true meridian.

As all of the observations taken during the usual hours of solar work agree within 1' of the true meridian, conclude that the adjustments of the instrument are satisfactory.

Unless otherwise specified all measurements are made with a ~~ballie~~ ~~steel~~ ~~tape~~ ~~50~~ ~~feet~~ ~~in~~ ~~length~~ ~~and~~ ~~compared~~ ~~with~~ ~~a~~ ~~Lufkin~~ ~~standard~~ ~~and~~ ~~found~~ ~~correct~~.

The measurements are made on the slope, the vertical angle determined and the slope measurements properly reduced to true horizontal values.

Retracement of  
4 Part of the Ft. Huachuca Military Reservation Boundary.

Part of the Boundary of the Ft. Huachuca Military Reservation was surveyed by Phillip Contzen, U.S.D.S., in 1906 establishing angle point monuments thereon at turning points on the Huachuca Mountain divide. The following notes describe a retracement of that portion of the Bdy. lying between A.Ps. Nos. 36 and 37.

-----

Angle Point No. 36 is a granite stone 21 x 16 x 12 ins., properly mkd., firmly set in a md. of stone and witnessed by four properly mkd. bearing trees, one each NE, SE, SW and NW of cor.

Thence,

S. 87° 40' W., on random line, bet. A.Ps. Nos. 36 and 37.

Over mountainous land, thru heavy timber and dense undergrowth.

Desc. 1200 ft. over westerly slope, along the divide.

51.64 Fall 90 lks. S. of the closing cor. of secs. 13 & 18, Ts. 23 S., R. 19 & 20 E., hereinafter described.

Continue line and measurement.

Asc. 286 ft. over easterly slope along divide to A.P. No. 37.

55.50 U.S. Forest Service Trail, brs. NW-SE.

72.52 Fall 127 lks. S. of A.P. No. 37 which is a porphyry stone 21 x 14 x 10 ins., firmly set, in md. stone, properly mkd. and witnessed by four properly mkd. bearing trees, two each NE, one SE and one SW of cor.

True course and distance bet. A.Ps. Nos. 36 and 37 are therefore, S. 88° 40' W., 72.48 chs., and bet. the C.C. and A.P. No. 37 is 20.87 chs. S 88° 40' W.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, yellow pine, oak and juniper.

Undergrowth, manzanita, scruboak and cacti.

-----

Resurvey of Part of East Bdy. of Township 23 S., Range 19 E.

chains Part of the East Bdy. of T.23 S.,R.19 E. was surveyed by P.Contzen,U.S.D.S. in 1906,establishing sec.and  $\frac{1}{4}$  sec. cor.monuments thereon with common reference to areas on both sides of the line,and establishing a closing cor. of secs.13 and 18 at point of intersection of the Tp.bdy. with bdy.of Ft.Huachuca Military Reservation.

No retracement or resurvey of any part of this tp.bdy. is of record.

The following notes describe a resurvey of all of the previously surveyed portion of the tp.bdy.,reconstructing all original cor.monuments thereon with altered reference to areas E.of line only,and reestablishing cors. referring to areas W.of line only at intervals of 40 chs. in northing,counting from the S.end of line, also reconstructing the Tp.cor. and the C.C.of secs.13&18.

-----  
Retracement for Resurvey.  
-----

40.25 From cor.of Ts.23 S.,Rs.19 & 20 E.,and Frac.Ts.24 S., Rs.19 & 20 E.,hereinafter described,  
North,on random line,on W.bdy. sec.31 ( $S.\frac{1}{2}$ )  
Fall 1 lk. W.of original  $\frac{1}{4}$  sec.cor. secs.31 & 36,  
hereinafter described.  
True course and dist. of  $S.\frac{1}{2}$  of W.bdy. of sec.31  
are therefore  $N.0^{\circ} 1'E.$ , 40.25 chs.

40.29 Thence  
North,on random line,on W. bdy.of sec.31 ( $N.\frac{1}{2}$ )  
Fall 2 lks. W. of original cor.of secs.25,30,31 and 36,  
hereinafter described.  
True course and dist. of  $N.\frac{1}{2}$  of W.bdy. of sec.31  
are therefore  $N.0^{\circ} 2'E.$ , 40.29 chs.

-----

40.32 North,on random line,on W. bdy. sec.30 ( $S.\frac{1}{2}$ )  
Fall 15 lks. W. of original  $\frac{1}{4}$  sec.cor. secs.25 and 30,  
hereinafter described.  
True course and dist.of  $S.\frac{1}{2}$  of W. bdy.of sec.30  
are therefore  $N.0^{\circ} 13'E.$ , 40.32 chs.

40.19 Thence  
North,on random line,on W. bdy.of sec.30 ( $N.\frac{1}{2}$ )  
Fall 15 lks. W. of original cor. secs.19,24,25 and 30,  
hereinafter described.  
True course and dist. of  $N.\frac{1}{2}$  of W.bdy. of sec.30  
are therefore  $N.0^{\circ} 13'E.$ , 40.19 chs.

-----

40.24 North,on random line,on W. bdy. sec.19 ( $S.\frac{1}{2}$ )  
Fall 5 lks. W. of original  $\frac{1}{4}$  sec.cor. secs.19 and 24,  
hereinafter described.  
True course and dist.of  $S.\frac{1}{2}$  of W.bdy.of sec.19  
are therefore  $N.0^{\circ} 4'E.$ , 40.24 chs.

39.95 Thence  
North, on random line,on W.bdy.of sec.19 ( $N.\frac{1}{2}$ )  
Fall 19 lks. E. of original cor. secs.13,18,19 and 24,  
hereinafter described.  
True course and dist. of  $N.\frac{1}{2}$  of W. bdy.of sec.19  
are therefore  $N.0^{\circ} 16'W.$ , 39.95 chs.

-----

chains

40.37 North, on random line, on W. bdy. of sec. 18 (S.  $\frac{1}{2}$ )  
Fall 8 lks. E. of original  $\frac{1}{4}$  sec. cor. of secs. 13 and 18,  
hereinafter described.

True course and dist. of S.  $\frac{1}{2}$  of W. bdy. of sec. 18  
are therefore N.  $0^{\circ}$  7' W., 40.37 chs.

Thence

22.09 North, on random line, on part of N.  $\frac{1}{2}$  of W. bdy. of sec. 18  
Intersect the original closing cor. of secs. 13 and 18,  
on the bdy. of the Ft. Huachuca Military Reservation,  
hereinafter described.

True course and dist. of this part of N.  $\frac{1}{2}$  of W. bdy. of  
sec. 18 are therefore North, 22.09 chs.

-----  
RESURVEY.  
-----

The original cor. of Ts. 23 S., Rs. 19 & 20 E., and Frac.  
Ts. 24 S., Rs. 19 & 20 E. is a granite stone, 12x14x16  
ins. above ground, firmly set, properly marked, and  
witnessed by four properly marked oak bearing trees,  
one each NE., SE., SW. and NW. of cor.

Reconstruct this cor. monument as follows:

alongside old stone, set an iron post, 3 ft. long, 3 ins.  
in diam., 24 ins. in ground, for cor. of Ts. 23 S., Rs. 19  
and 20 E. and Frac. Ts. 24 S., Rs. 19 & 20 E., marked on  
brass cap

T23S	
R19E	R20E
S36	S31
S1	S6
T24S	

1927

the original NE. bearing tree being in bad state of  
decay, establish a new bearing tree NE. as follows:  
an oak, 6 ins. diam., bears N.  $67^{\circ}$  E., 64 lks. dist.,  
marked T23S R20E S31 BT.

Thence,

N.  $0^{\circ}$  1' E., on true line, on E. bdy. of sec. 36.

Over rolling land, thru scattering timber and dense  
undergrowth. Asc. 20 ft. over S. slope.

3.50 Low ridge, bears NE. and SW.

Desc. 95 ft. over NW. slope.

12.80 Wash, 20 lks. wide, 1 ft. deep, course SW.

Asc. 58 ft. over SE. slope.

22.50 Spur, slopes SW. Desc. 23 ft. over NW. slope.

31.50 Shallow wash, 10 lks. wide, course SW. Thence over nearly  
level land, sloping slightly to the W.

32.70 Road, bears NE. and SW.

34.00 Leave nearly level and enter rolling land.

Desc. 11 ft. over NW. slope to

36.50 Bottom of Bear Canyon, 50 lks. wide, containing a stream of  
running water, 10 lks. wide, 4 ins. deep, course SW.

Asc. 24 ft. over SE. slope.

37.00 Toe of spur from W. Desc. 20 ft. over NE. slope.

37.50 Wash, 20 lks. wide, course SE. from N.

Asc. gradually in this wash to

39.00 Leave wash, course S. from NW. Asc. 25 ft. over SW. slope to

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
ground, for reestablished  $\frac{1}{4}$  sec. cor. of sec. 36 only,  
with brass cap marked

$\frac{1}{4}$ S36
-------------------

1927

from which



Resurvey of Part of the East Bdy. of T.23 S., R.19 E. 7

Chains

an oak, 12 ins. in diam., bears N.20°W., 89 lks. dist., marked 1/4 S36 BT  
an oak, 8 ins. in diam., bears S.13°W., 43 lks. dist., marked 1/4 S36 BT


40.25 Asc. slight SW slope to intersect the original 1/4 sec. cor. secs. 31 and 36, which is a granite stone 6 x 8 x 4 ins. above ground, firmly set, properly mkd. and witnessed by two properly mkd. bearing trees, one each SE and NW of cor. Reconstruct and alter this cor. monument to refer to the quarters of sec. 31 only, by setting an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground alongside the original cor. stone, with brass cap mkd.

1/4 S31

1927 from which, an oak, 6 ins. in diam., bears N.12 1/2°E., 51 lks. dist., mkd. 1/4 S31 BT (new BT.) Destroy markings on the original NW bearing tree.

Thence, N.0° 2'E., on true line, continuing measurement. Asc. 92 ft. over SW slope.

53.00 Spur, slopes SE.  
Desc. 20 ft. over gradual NE slope.  
66.50 Shallow wash, course SE.  
Asc. gradual SW slope.  
67.50 Spur, slopes SE.  
Desc. gradual NE slope.  
70.00 Wash, 30 lks. wide, course SE. Enter mountainous land.  
Asc. 60 ft. over SW slope to  
80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for the reestablished cor. secs. 25 and 36 only, with brass cap marked



1927 from which, an oak, 12 ins. in diam., bears N.52°W., 100 lks. dist., mkd. T23S R19E S25 BT  
an oak, 14 ins. in diam., bears S.47°W., 72 lks. dist., mkd. T23S R19E S36 BT

Land, mountainous, and rolling.  
Soil, rocky 4th. rate.  
Timber, oak, juniper and willow.  
Undergrowth, scruboak, manzanita and cacti.

0.54 N.0° 2'E., on true line, on E. Bdy. sec. 25. Over mountainous land, thru scattering timber and dense undergrowth. Asc. gradual SW slope to intersect the original cor. secs. 25, 30, 31 and 36, which is a granite stone 10 x 16 x 14 ins. above ground, firmly set, properly mkd. and witnessed by four properly mkd. bearing trees, one each NE, SE, SW and NW of cor.

Chains

Reconstruct and alter this corner monument to refer to secs. 30 and 31 only, by setting an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground alongside the original cor. stone, with brass cap mkd.

T23S	T23S
R19E	S30
S25	S31
	R20E

1927

Destroy the markings on the NW and SW bearing trees.

Thence,

N.0°13'E., on true line, continuing measurement.

Asc. gradual SW slope, 63 ft.

5.50 Spur, top, bears N.10°W., and S.10°E.

Over level land.

6.00 Leave top, desc. gradual NE slope.

11.00 Head of wash, course SE.

Asc. 56 ft. over SW slope.

19.00 Same spur noted above, from NE to SW.

Desc. 63 ft. over NW slope.

25.60 Head of wash, course SW.

Asc. gradual SW slope to spur.

29.70 Road, brs. N.85°E. and S.85°W.

Spur, slopes W.

Desc. gradual NW slope to wash.

32.00 A house brs. E. 75 lks. dist. (Jack Wakefields Camp.)

33.00 A house brs. E. 125 lks. dist.,

34.60 Wash, 50 lks. wide, 2 ft. deep, course SW.

A well of good water, on edge of wash, brs. E. 50 lks.

35.60 Leave wash, asc. 31 ft. over gradual S. slope.

37.60 Low spur, slopes SW.

Desc. gradual NW slope.

38.60 Wash, 30 lks. wide, course SW.

Asc. gradual SW slope to

40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the reestablished  $\frac{1}{4}$  sec. cor. sec. 25 only, with brass cap mkd.

$\frac{1}{4}$  S25

1927

from which,

an oak, 6 ins. in diam., bears N.58 $\frac{1}{2}$ °W., 18 lks. dist., mkd.  $\frac{1}{4}$  S25 BT

an oak, 6 ins. in diam., bears S.71°W., 6 lks. dist., mkd.  $\frac{1}{4}$  S25 BT

40.86 Asc. gradual SW slope to intersect the original  $\frac{1}{4}$  sec. cor. secs. 25 and 30, which is a granite stone 8 x 8 x 6 ins. above ground, firmly set, properly mkd. and witnessed by two properly mkd. bearing trees, one each NE and SW of cor.

Reconstruct and alter this cor. monument to refer to the quarters of sec. 30 only, by setting an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground alongside the original cor. stone, with brass cap mkd.

$\frac{1}{4}$  S30

1927

from which,


an oak, 8 ins. in diam., bears S.47 $\frac{1}{2}$ °E., 22 lks. dist., mkd.  $\frac{1}{4}$  S30 BT

Destroy markings on the original SW bearing tree.

Resurvey of Part of the East Bdy. of T. 23 S., R. 19 E. 9

Chains

Continue line and measurement.  
 Asc. gradual S. slope.  
 41.00 Spur, slopes SW.  
 Desc. gradual NW slope to wash.  
 44.00 Trail, bears NE and SW.  
 47.50 Wash, 10 lks. wide, 1 ft. deep, course SW.  
 Asc. 478 ft. over SE slope.  
 79.00 Spur, slopes E.  
 Desc. gradual NE slope to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for the reestablished cor. secs. 24 and 25 only, with brass cap mkd.




1927 from which,  
 an oak, 8 ins. in diam., bears N.32°W., 34 lks.  
 dist., mkd. T23S R19E S24 BT  
 an oak, 12 ins. in diam., bears S.39°W., 103 lks.  
 dist., mkd. T23S R19E S25 BT

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, oak and juniper.  
 Undergrowth, scruboak, manzanita and catclaw.

N.0°13'E., on true line, on E. Bdy. sec. 24.  
 Over mountainous land, thru scattering timber and dense undergrowth.


Desc. gradual NE slope to  
 1.05 Intersect the original cor. secs. 19, 24, 25 and 30, which is a granite stone 18 x 10 x 8 ins. above ground, firmly set, properly mkd. and witnessed by properly mkd. bearing trees, one each NE, SE, SW and NW of cor.  
 Reconstruct and alter this cor. monument to refer to secs. 19 and 30 only by setting an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground alongside the original cor. stone, with brass cap mkd.



1927  
 Destroy markings on the NW and SW bearing trees.

thence,  
 N.0° 4'E., on true line, continuing measurement.  
 Along level E. slope.

6.50 Desc. 141 ft. over NE slope.  
 12.00 Wash, 100 lks. wide, course SE. Trail on N. edge, brs. NW-SE.  
 Asc. 405 ft. over SW slope to  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the reestablished  $\frac{1}{4}$  sec. cor. sec. 24 only, with brass cap marked



1927 from which,  
 an oak, 12 ins. in diam., brs. N.10 $\frac{1}{2}$ °W., 12 lks.  
 dist., mkd.  $\frac{1}{4}$  S24 BT  
 an oak, 12 ins. in diam., brs. S.56°W., 32 lks.  
 dist., mkd.  $\frac{1}{4}$  S24 BT

Chains

- 41.29 Asc. gradual SW slope to intersect the original  $\frac{1}{4}$  sec. cor. secs. 19 and 24 which is a stone 14 x 12 x 12 ins. above ground, firmly set, properly mkd. and witnessed by two properly mkd. bearing trees, one each NW and SE of cor.  
Reconstruct and alter this cor. monument to refer to the quarters of sec. 19 only by setting an iron post 3 ft. long 1 in. in diam., 14 ins. in the ground to bedrock, alongside the original cor. stone, with brass cap mkd.
- $\frac{1}{4}$  S19
- 1927 from which,  
a juniper, 4 ins. in diam., brs. N.10°E., 31 lks.  
dist., mkd. BT (new BT.)  
Destroy markings on the NW bearing tree.
- Thence,  
N.0°16'W., on true line, continuing measurement.
- 46.30 Asc. gradual SW slope.  
Spur, slopes SW.
- 51.30 Desc. gradual NW slope.  
Head of wash, course SW.
- 67.60 Asc. 486 ft. over S. slope to ridge.  
Intersect the SE. side line (3-4) of the "Smuggler's" pat. mining claim, Min. Sur. No. 2067, at 5.00 chs., S.30 $\frac{1}{2}$ °W., from cor. No. 3 thereof.
- Thence across pat. mining claims.
- 69.10 Ridge, brs. E and SW. Enter heavy timber, brs. E-W.  
Desc. 246 ft. over NW slope to canyon bottom.
- 74.00 Trail brs. NW-SE.
- 76.15 Rocky wash in bottom of Glance Canyon, 50 lks. wide, course West.
- 80.00 Asc. 67 ft. over S. slope to  
Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for the reestablished cor. secs. 13 and 24, only, with brass cap marked

T23S	T23S
S13	R20E
S24	S19
R19E	

1927 from which,  
a pinion 6 ins. in diam., brs. N.50°W., 39 lks.  
dist., mkd. T23S R19E S13 BT  
an oak, 4 ins. in diam., brs. S.26°W., 12 lks.  
dist., mkd. BT


Land, mountainous.  
Soil, rocky 4th. rate.  
Timber, oak, yellow pine and juniper.  
Undergrowth, scruboak, manzanita and cacti.

- N.0° 16' W., on true line, on that part of E. bdy. of sec. 13 situated outside the Ft. Huachuca Military Reservation under Overmountainous land, thru heavy timber and dense undergrowth.
- Asc. gradual SW slope to
- 1.24 intersect the original cor. secs. 13, 18, 19 and 24, which is a 2 in. cross + and three grooves ~~in the S.~~ of cross cut in bedrock ledge, witnessed by four properly mkd. bearing trees, one each NE, SE, SW and NW of cor.

Resurvey of Part of the East. Bdy. of T.23 S., R.19 E. 11

Chains

Reconstruct and alter this cor. monument to refer to secs. 18 and 19 only by setting an iron post 3 ft. long, 2 ins. in diam., on bedrock above cross marking true original cor. point, supported by a md. of stone, with brass cap marked



Destroy the markings on the NW and SW bearing trees.

Thence, N.0° 7' W., on true line, on E. Bdy. sec. 13, continuing measurement.

- Asc. 20 ft. over SW slope.
- 3.50 Spur, slopes W.
- Desc. 36 ft. over NW slope to wash.
- 5.22 Intersect the NW. side line (1-2) of the "Silver King" pat. mining claim, Min. Sur. No. 2067, at 10.15 chs. N.30½° E., of cor. No. 1 thereof.
- Leave pat. mining claims.
- 6.20 Head of wash, course SW.
- Asc. 260 ft. over SE slope.
- 14.70 Spur, slopes SW.
- Desc. 24 ft. over NW slope.
- 17.70 Head of wash, course SW.
- Asc. 25 ft. over SE slope.
- 26.30 Spur, slopes W.
- Desc. 584 ft. over steep N. slope, to
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for the reestablished ¼ sec. cor. sec. 13 only, with brass cap marked

¼ S13

1927 from which,  
 a yellow pine, 20 ins. in diam., brs. N.27° W., 102 lks. dist., marked ¼ S13 BT  
 a yellow pine, 6 ins. in diam., brs. N.54° W., 53 lks. dist., marked ¼ S13 BT

- Desc. 20 ft. over NE slope to
- 41.61 Intersect the original ¼ sec. cor. secs. 13 and 18, which is stone 6 x 4 x 6 ins. above ground, firmly set, properly mkd. and witnessed by two properly mkd. bearing trees, one each NE and SW of cor.
- Reconstruct and alter this cor. monument to refer to the quarters of sec. 18 only by setting an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground alongside the original cor. stone, with brass cap mkd.

¼ S18

1927 from which,  
 a yellow pine, 12 ins. in diam., brs. S.41½° E., 54 lks. dist., marked ¼ S18 BT  
 Destroy markings on the SW bearing tree.

- Thence,
- North, on true line, continuing measurement.
- Desc. 89 ft. over NE slope.
- 43.60 Wash, in canyon bottom, 100 lks. wide, course W.

## BOOK 3826

12 Resurvey of Part of the East. Bdy. of T.23 S., R.19 E.

Chains

59.60 Asc. 306 ft. over S. slope.  
Divide, brs. E. and W.

63.70 Desc. 48 ft. over NE slope to  
Intersect the original closing cor. of Secs. 13 & 18, Ts. 23 S., Rs. 19 & 20 E., which is a limestone 8 x 12 x 16 ins. above ground, firmly set, properly mkd. and witnessed by two properly mkd. bearing trees, one each SE and SW of cor. Reconstruct this cor. by setting an iron post 3 ft. long 3 ins. in diam., 14 ins. in the ground to bedrock, alongside the original cor. stone, supported by a md. of stone, for the closing cor. of Secs. 13 & 18, Ts. 23 S., Rs. 19 & 20 E., on bdy. of Ft. Huachuca Military Reservation, with brass cap marked,

U S M R

S13 S18  
R19E R20E

CC  
T23S  
1927

from which,  
a yellow pine, 14 ins. in diam., bears S. 35° W., 43 lks. dist., marked T23S R19E S13 CCBT  
(new bearing tree taken on account of original SW tree being in a state of decay.)

Land, mountainous.

Soil, rocky 4th. rate.

Timber, oak, juniper and yellow pine.

Undergrowth, manzanita, scruboak, catclaw and cacti.

Survey of the West Boundary of T. 23 S., R. 19 E.

Chains

The corner of T. 23 S., R. 19 E., and fractional T. 24 S., R. 19 E., established by S.E. Blout, U.S.C.E., in 1923, is an iron post 3 ins. in diam., projecting 12 ins. above ground, firmly set, with brass cap properly mkd. and witnessed by two properly mkd. bearing trees, one each NE and SE of cor.

Thence, N. 0° 19' W., on true line, on the west boundary sec. 31. Over rolling land, thru scattering timber and undergrowth. Desc. 40 ft. over gradual N. slope to wash.

0.75

Fence, brs. NE-SW.

0.79

Intersect bdy. of H.E.S. No. 295 at Cor. No. 5, thereof and C.C. of sec. 31, which is a stone 6 x 12 x 6 ins. above ground, firmly set, properly marked and witnessed by a mound of stone E. of cor. Thence across H.E.S. No. 295.

8.95

Fence, brs. NE-SW.

Thru E. end of ploughed field.

11.95

Fence, brs. E. and W. Leave ploughed land.

12.85

Road, brs. E-W.

13.30

Intersect cor. of Frac. T. 23 & 24 S., R. 18 E., identical with Cor. No. 1 of T. 23 S., R. 18 E., which is a stone 12 x 10 x 4 ins. above ground, firmly set, properly mkd., and witnessed by a mound of stone W. of cor. Thence,

North on true line, continuing measurement of W. bdy. of sec. 31, along line 1-2 of bdy. of H.E.S. No. 295.

15.30

Wash, 80 lks. wide, course SW. Across bottom land.

16.05

Fence 70 brs. E. and W. slope.

16.80

Leave bottom, asc. 70 ft. over S. slope to spur.

18.26

Intersect cor. No. 2 of H.E.S. No. 295 which is a stone 6 x 12 x 12 ins. above ground, firmly set, properly mkd., and witnessed by a mound of stone S. of cor. Leave H.E.S. No. 295.

18.27

Fence, brs. NE-SW.

21.00

Spur, slopes SW.

Desc. 49 ft. over NW slope.

22.80

Foot of desc., thence over level bottom land.

32.70

Edge of foot of spur from E.

39.00

Wash, 15 lks. wide, course SW.

40.00

Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the 1/4 sec, cor. sec. 31 only, with brass cap marked

1/4 S31

1927

from which,

an oak, 15 ins. in diam., brs. N. 44 1/2° E., 58 lks.

dist., mkd. 1/4 S31 BT

an oak, 12 ins. in diam., brs. S. 75 1/2° E., 75 lks.

dist., mkd. 1/4 S31 BT

Leave bottom, asc. 68 ft. over SE slope.

52.50

Spur, near end, slopes E.

Desc. 13 ft. over NE slope.

53.20

Wash, 5 lks. wide, course SE.

Asc. slight SW slope to

53.30

(Point for 1/4 sec. cor. sec. 36, described in book "B".

Asc. 85 ft. over S. slope to

80.00

Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for the cor. secs. 30 and 31 only, with brass cap mkd.

T23S

T23S

R18E

S30

S36

S31  
R19E

1927

No trees available; raise a md. stone 3 ft. base, 1 1/2 ft. high E. of cor.

Chains

Land, rolling and level.  
Soil, gravelly 3rd. rate.  
Timber, oak and juniper.  
Undergrowth, oakbrush and cacti.

North, on true line, on W. Bdy. sec. 30.  
Over rolling land, thru scattering timber and undergrowth.  
Asc. 60 ft. over gradual SE slope, to ridge.  
13.30 Point for the cor. secs. 25 and 36, T.23 S., R.18 E., described in book "B".  
25.00 Road, brs. N.15°E.-S.15°W.  
27.00 Top of ascent; ridge bears NE-SW.  
Desc. gradual NW slope 15 ft. to  
40.00 Set an iron post 3 ft. long, 1-in. in diam., 26 ins. in the ground for the 1/4 sec. cor. sec. 30 only, with brass cap mkd.  
  
1/4 S30  
  
1927 from which,  
an oak, 10 ins. in diam., brs. N.26 1/2°E., 45 lks.  
dist., mkd. 1/4 S30 BT  
an oak, 8 ins. in diam., brs. S.44 1/2°E., 17 lks.  
dist., mkd. 1/4 S30 BT  
Desc. 25 ft. over NW slope.  
43.50 Wash, 10 lks. wide, course SW.  
Asc. 35 ft. over SE slope to spur.  
49.40 Road, brs. NE-SW.  
50.00 Spur, slopes SW.  
Desc. 145 ft. over NW slope to wash.  
53.30 Point for the 1/4 sec. cor. sec. 25, T.23 S., R.18 E. described in book "B".  
69.10 Wash, 5 lks. wide, course SW.  
Asc. 60 ft. over SE slope.  
75.00 Spur, slopes SW.  
Desc. 126 ft. over NW slope to  
80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for the cor. secs. 19 and 30, with brass cap mkd.

T23S	T23S
R18E	S19
S25	S30
	R19E

1927 from which,  
an oak, 12 ins. in diam., brs. N.19 1/2°E., 19 lks.  
dist., mkd. T23S R19E S19 BT  
an oak, 12 ins. in diam., brs. S.34 1/2°E., 52 lks.  
dist., mkd. T23S R19E S30 BT

Land, rolling.  
Soil, rocky and gravelly 3rd. rate.  
Timber, oak.  
Undergrowth, scruboak and mtn. mahogany.

North, on true line, on W. Bdy. sec. 19.  
Over rolling land, thru scattering timber and undergrowth.  
Desc. 45 ft. over NW slope.  
1.70 Wash, 30 lks. wide, 2 ft. deep, course W.  
Asc. 172 ft. over south slope to point for 1/4 sec. cor. sec. 19.  
12.40 Wash, 10 lks. wide, course SW.  
Asc. SE slope to



13.30 Point for cor. secs. 24 and 25, T.23 S., R.18 E., described in book "B".  
 Asc. S<sup>2</sup> slope.  
 32.00 Top of level spur, slopes SW.  
 Over level land.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the  $\frac{1}{4}$  sec. cor. sec. 19 only, with brass cap mkd.

1927

from which,

an oak, 10 ins. in diam., brs. N.40°E., 60 lks.  
 dist., mkd.  $\frac{1}{4}$  S19 BT  
 an oak, 9 ins. in diam., brs. S.12°E., 81 lks.  
 dist., mkd.  $\frac{1}{4}$  S19 BT

41.00 Leave top of spur.  
 Desc. 110 ft. over N. slope.  
 41.40 Old road, brs. E. & W.  
 50.40 Wash, 10 lks. wide, course W:  
 Asc. 90 ft. over S. slope to spur.  
 53.30 Point for the  $\frac{1}{4}$  sec. cor. sec. 24, T.23 S., R.18 E., described in book "B".  
 58.10 Spur, slopes W.  
 Desc. 190 ft. over N. slope.  
 69.50 Foot of descent; S. edge of wash in Parker Canyon.  
 69.85 Center of wash, course SW.  
 79.20 N. edge of wash; Asc. 50 ft. over S<sup>E</sup> slope to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for the cor. secs. 18 and 19 only, with brass cap mkd.

T23S	T23S
R18E	S18
S24	S19
	R19E

1927

from which,

a juniper, 10 ins. in diam., brs. N.14 $\frac{1}{2}$ °E., 88 lks.  
 dist., mkd. T23S R19E S18 BT  
 a juniper, 18 ins. in diam., brs. S.11°E., 88 lks.  
 dist., mkd. T23S R19E S19 BT

Land, rolling and level.  
 Soil, rocky and gravelly 2nd. and 3rd. rate:  
 Timber, oak and juniper.  
 Undergrowth, scruboak and manzanita.

-----

North, on true line, on W. Bdy: sec. 18.  
 Over rolling land, thru scattering timber and undergrowth.  
 Gradual desc. over NE slope.  
 7.90 Wash, 10 lks. wide, course SE.  
 Asc. 46 ft. over SE slope to  
 13.30 Point for the cor. secs. 13 and 34, T:23 S., R.18 E., described in book "B".  
 Desc. 15 ft. over NE slope.  
 16.50 Wash, 10 lks. wide, course S.20°E.  
 Asc. 130 ft. over SW slope.  
 28.80 Spur, slopes SE.  
 Desc. 10 ft. over NE slope.  
 35.60 Head of wash, course SE.  
 Asc. 95 ft. over S. slope, to  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, supported by a md. of stone, for the  $\frac{1}{4}$  sec. cor. sec. 18 only, with brass cap mkd.

Chains

| 1/4 S18

1927 from which,

an oak, 10 ins. in diam., brs. N.53°E., 60 lks.  
 dist., mkd. 1/4 S18 BT

an oak, 8 ins. in diam., brs. S.73 1/2°E., 47 lks.  
 dist., mkd. 1/4 S18 BT

Asc. 43 ft. over S. slope.

42.10 Spur, slopes S.60°E.

Desc. gradually 143 ft. over NE slope to wash.

53.30 Point for the 1/4 sec. cor. sec. 13, T.23 S., R.18 E., described in book "B".

56.70 Wash, 10 lks. wide, course E.

Asc. 20 ft. over E. slope.

69.80 Wash, 10 lks. wide, 10 ft. deep, course E.

Asc. 75 ft. over SE slope.

73.80 Spur, slopes E.

Desc. 111 ft. over N. slope.

79.90 Wash, 10 lks. wide, course E.

Asc. slight S. slope to

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, supported by a md. of stone, for the cor. secs. 7 and 18 only, with brass cap marked

T23S	T23S
R18E	S7
S13	S18
	R19E

1927 from which,

a pine, 7 ins. in diam., brs. N.86 1/4°E., 114 lks.  
 dist., mkd. T23S R19E S7 BT

a pine, 7 ins. in diam., brs. S.60 1/2°E., 114 lks.  
 dist., mkd. T23S R19E S18 BT

Land, rolling.  
 Soil, rocky 4th. rate.  
 Timber, oak, juniper and pine.  
 Undergrowth, scruboak and manzanita.

-----

North, on true line, on W. bdy. sec. 7.  
 Over rolling land, thru scattering timber and undergrowth.

2.00 Asc. 10 ft. over S. slope.  
 Spur, slopes E.

5.80 Desc. 60 ft. over NE slope.  
 Wash, 5 lks. wide, course E.

10.30 Asc. 30 ft. over S. slope.  
 Desc. gradual NE slope 50 ft.

13.30 Point for the cor. secs. 12 and 13, T.23 S., R.18 E., described in book "B".

14.30 Wash, 30 lks. wide, course SE.  
 Asc. 80 ft. over SW slope to

40.00 Set an iron post 3 ft. long, 1 in. in diam., 8 ins. in the ground to bedrock, supported by a md. stone, for the 1/4 sec. cor. sec. 7 only, with brass cap mkd.

| 1/4 S7

1927 from which,


a juniper, 10 ins. in diam., brs. N.23 1/4°E., 80 lks.  
 dist., mkd. 1/4 S7 BT

a juniper, 8 ins. in diam., brs. S.36 1/2°E., 94 lks.  
 dist., mkd. 1/4 S7 BT

Survey of the West boundary of T.23 S., R. 19 E.

Chains


53.30 Asc. 70 ft. over gradual SW slope.  
 (Point for the 1/4 sec. cor. sec. 12, T.23 S., R.18 E., described in book "B".)  
 Desc. 40 ft. over NW slope.  
 57.85 Wash, 15 lks. wide, course SW. Enter mountainous land.  
 Asc. 430 ft. over S. slope to spur.  
 66.00 Top of cliff 180 ft. high, facing S.  
 76.00 Spur, slopes SW.  
 Desc. 32 ft. over NW slope to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, supported by a md. stone, for the cor. secs. 6 and 7 only, with brass cap mkd.



1927 from which,  
 a juniper, 6 ins. in diam., brs. N.67°E., 32 lks. dist., mkd. T23S R19E S6 BT  
 a juniper, 12 ins. in diam., brs. S.40 1/2°E., 24 lks. dist., mkd. T23S R19E S7 BT

Land, rolling and mountainous.  
 Soil, rocky 4th. rate.  
 Timber, oak, juniper and pine.  
 Undergrowth, scruboak, catclaw and manzanita.

North, on true line, on W. Bdy. sec. 6.  
 Over mountainous land, thru scattering timber and undergrowth.  
 Desc. 46 ft. over gradual NW slope.  
 13.30 (Point for the cor. secs. 1 and 12, T.23 S., R.18 E., described in book "B".)  
 Asc. 70 ft. over S. slope.  
 21.00 Ridge, bears NW and SE.  
 Desc. 96 ft. over NE slope to  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, supported by a md. stone, for the 1/4 sec. cor. sec. 6 only, with brass cap mkd.



1927 from which,  
 a yellow pine, 10 ins. in diam., brs. N.61°E., 59 lks. dist., mkd. T23S R19E S6 BT  
 an oak, 12 ins. in diam., brs. S.25°E., 67 lks. dist., mkd. 1/4 S6 BT

Desc. 210 ft. over gradual NE slope to wash.  
 53.30 (Point for the 1/4 sec. cor. sec. 1, T.23 S., R.18 E., described in book "B".)  
 57.60 Wash, 10 lks. wide, course NW.  
 58.20 Road, brs. NW-SE.  
 Asc. 110 ft. over S. slope.  
 65.60 Spur, slopes W.  
 Desc. 135 ft. over N. slope.  
 71.80 Wash, 5 lks. wide, course W.  
 Asc. 40 ft. over S. slope.  
 74.00 Point of spur from E.  
 Desc. 40 ft. over N. slope.

Chains

77.50

Wash, 10 lks. wide, course SW.

Asc. 9 ft. over SW slope to cor.

79.15

Road, brs. NE-SW.

80.00

Set an iron post 3 ft. long, 3 ins. in diam., 24 ins. in the ground for the cor. Ts. 23 S. 23 R. 19 E., only with brass cap marked

T23S	T22SR19E
R18E	S31
S1	S6
	T23S

1927

from which,

an oak, 6 ins. in diam., brs. N.66°E., 59 lks.

dist., mkd. T22S R19E S31 BT

an oak, 14 ins. in diam., brs. S.59½°E., 145 lks.

dist., mkd. T23S R19E S6 BT

Land, mountainous.

Soil, rocky 4th. rate.

Timber, oak.

Undergrowth, scruboak, manzanita and cacti.


Survey of Part of North Boundary of T.23 S., R.19 E.

chains

From temp. cor. of secs. 2, 3, 34 & 35, Ts. 22 & 23 S., R. 19 E., set at 160 chs. due North from cor. of secs. 10, 11, 14 & 15, T. 23 S., R. 19 E., West, on random line, setting temp. 1/4 sec. and sec. cors., alternately, at intervals of 40 chs., and at 320.21 chs. intersect the range line at 6 lks. S. from the cor. of Ts. 22 & 23 S., R. 19 E., hereinbefore described.

Thence, East, on true line, bet. secs. 6 and 31. Over mountainous land, thru scattering timber and dense undergrowth. Desc. 10 ft. over SE. slope.

- 1.30 Road, brs. NE.-SW.
- 1.70 Wash, 10 lks. wide, course SW.
- 3.90 Telephone line, brs. N.-S.  
Asc. gradually over NW. slope.
- 26.40 Spur, slopes N. Desc. 25 ft. over NE. slope.
- 32.00 Head of wash, course N.  
Asc. 70 ft. over NW. slope to
- 40.21 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for 1/4 sec. cor. of secs. 6 and 31, with brass cap marked




1927

from which,

an oak, 12 ins. in diam., brs. N. 26° W., 77 lks.  
dist., mkd. 1/4 S31 BT

an oak, 9 ins. in diam., brs. S. 19° W., 55 lks.  
dist., mkd. 1/4 S6 BT

- 43.40 Asc. gradually over NW. slope. Ridge, brs. N. 80° E. - S. 80° W.  
Desc. 10 ft. over SE. slope.
- 51.50 Head of wash, course S.  
Asc. 27 ft. over SW. slope.
- 55.40 Spur, slopes S.  
Desc. 20 ft. over SE. slope.
- 59.60 Head of wash, course S.  
Asc. 20 ft. over SW. slope.
- 69.40 Same ridge, brs. N. 60° W. - S. 60° E.  
Desc. 20 ft. over N. slope to
- 72.50 Same ridge, brs. N. 70° E. - S. 70° W.  
Asc. 23 ft. over S. slope to
- 80.21 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in ground to bedrock, supported in a mound of stone, for cor. of secs. 5, 6, 31 and 32, with brass cap mkd.,



1927

from which,

an oak, 12 ins. in diam., brs. N. 28 3/4° E., 128 lks.  
dist., mkd. T22S R19E S32 BT

an oak, 6 ins. in diam., brs. S. 46 1/2° E., 57 lks.  
dist., mkd. T23S R19E S5 BT

an oak, 4 ins. in diam., brs. S. 75 1/4° E., 34 lks.  
dist., mkd. BT

an oak, 12 ins. in diam., brs. N. 67 1/4° W., 152 lks.  
dist., mkd. T22S R19E S31 BT

Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, oak and juniper.  
Undergrowth, scrub oak, manzanita and cacti.

chains  
 East, on true line, bet. secs.5 and 32.  
 Over mountainous land, thru scattering timber and under-  
 growth. Asc. 70 ft. over SW. slope.  
 14.70 Spur, slopes S.  
     Desc. 100 ft. over SE. slope.  
 24.20 Asc. 70 ft. over SW. slope.  
 37.30 Ridge, brs. N.60°W.- S.60°E.  
     Desc. 30 ft. over NE. slope to  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in  
     ground to bedrock, supported by a mound of stone, for  
     ¼ sec. cor. of secs. 5 and 32, with brass cap mkd.,

S32  
 ¼ —————  
     S5  
 1927

from which,

an oak, 12 ins. in diam., brs. N.56°W., 54 lks.  
     dist., mkd. ¼ S32 BT  
 an oak, 6 ins. in diam., brs. S.60½°W., 38 lks.  
     dist., mkd. ¼ S5 BT

Desc. 110 ft. over NE. slope.  
 48.20 Wash, 10 lks. wide, course NW.  
     Asc. 172 ft. over NW. slope to ridge.  
 54.00 Trail, brs. NW.- SE.  
 57.50 Ridge, brs. NE.- SW.  
     Desc. 60 ft. over SE. slope.  
 60.50 Head of wash, course S.  
     Asc. 15 ft. over SW. slope.  
 61.70 Same ridge, brs. NW.- SE.  
     Desc. 170 ft. over NE. slope.  
 72.00 Wash, 5 lks. wide, course N.  
     Thence over N. slope.  
 74.40 Trail, brs. NW.- SE.  
 79.20 Bend in wash, course NW. from NE.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in  
     ground, for cor. of secs. 4, 5, 32 and 33, with brass cap  
     mkd.,

T22S R19E  
 S32 | S33  
 ————  
     S5 | S4  
     T23S  
 1927

from which

an oak, 6 ins. in diam., brs. N.86½°E., 38 lks.  
     dist., mkd. T22S R19E S33 BT  
 an oak, 10 ins. in diam., brs. S.56°E., 31 lks.  
     dist., mkd. T23S R19E S4 BT  
 an oak, 13 ins. in diam., brs. S.74°W., 20 lks.  
     dist., mkd. T23S R19E S5 BT  
 an oak, 12 ins. in diam., brs. N.55°20'W., 41 lks.  
     dist., mkd. T22S R19E S32 BT

Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, oak and juniper.  
 Undergrowth, scrub oak, manzanita, catclaw and cacti.

-----

East, on true line, bet. secs. 4 and 33.  
 Over mountainous land, thru scattering timber and dense  
 undergrowth.  
     Desc. slightly over NE. slope.  
 1.00 Wash, 10 lks. wide, course NW.  
     Asc. 80 ft. over W. slope.  
 5.90 Spur, slopes S.  
     Desc. 50 ft. over SE. slope.  
 15.20 Same wash, course SW.

Survey of Part of North Boundary of T. 23 S., R. 19 E.

Chains Asc. 470 ft. over NW. slope to  
40.00 Set an iron post 3 ft. long, 1 in. in diam., 15 ins. in the ground to bedrock, supported by a md. stone, for the 1/4 sec. cor. secs. 4 and 33, with brass cap mkd.

1/4 S 33  
S 4  
1927

from which  
An oak, 10 ins. in diam., brs. N. 64 1/4° W., 28 lks. dist., mkd. 1/4 S 33 B T.  
An oak, 6 ins. in diam., brs. S. 62° W., 45 lks. dist., mkd. 1/4 S 4 B T.

Asc. 38 ft. over NW. slope.  
41.70 Desc. 120 ft. over NE. slope.  
57.00 Wash, 10 lks. wide, course NW. Asc. 110 ft. over SW. slope.

61.70 Same wash, course SW. Asc. 150 ft. over NW. slope.  
67.30 Ridge, brs. NE. - SW. Desc. 60 ft. over SE. slope.

70.70 Wash, near head, course SE. Asc. 50 ft. over SW. slope.  
73.70 Spur, slopes S. Desc. 110 ft. over SE. slope.

75.30 Mine tunnel on line.  
78.20 Wash, 10 lks. wide, course S. Asc. 10 ft. over SW. slope to

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for the cor. of secs. 3, 4, 33 and 34, with brass cap mkd.

T 22 S R 19 E  
S 33 | S 34  
S 4 | S 3  
T 23 S  
1927

from which  
An oak, 8 ins. in diam., brs. N. 26 1/2° E., 108 lks. dist., mkd. T 22 S R 19 E S 34 B T.  
An oak, 14 ins. in diam., brs. S. 53 1/2° E., 45 lks. dist., mkd. T 23 S R 19 E S 3 B T.  
An oak, 12 ins. in diam., brs. S. 26 1/2° W., 40 lks. dist., mkd. T 23 S R 19 E S 4 B T.  
An oak, 15 ins. in diam., brs. N. 53° W., 87 lks. dist., mkd. T 22 S R 19 E S 33 B T.

Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, oak, juniper and pine.  
Undergrowth, scrub oak, manzanita, catclaw and cacti.

East, on true line, bet. secs. 3 and 34.  
Over mountainous land, thru scattering timber and dense undergrowth.

Asc. 820 ft. over SW. slope to  
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for the 1/4 sec. cor. secs. 3 and 34, with brass cap marked

1/4 S 34  
S 3  
1927

from which  
U. S. L. M. No. 4027, brs. S. 21° 18' W., 22.56 chs. dist. No suitable trees available. Raise a md. stone, 3 ft. base, 1 1/2 ft. high N. of cor.

Survey of Part of North Boundary of T. 23 S., R. 19 E.

Chains Asc. 15 ft. over W. slope.  
 40.50 Ridge, brs. N. - S.  
 Desc. 750 ft. over SE. slope, to wash.  
 44.00 Top of cliff, 100 ft. high, facing E. on line.  
 Desc. over vertical face of same.  
 44.20 Foot of cliff; brs. N. - S.  
 73.00 Trail, brs. N. - S.  
 75.50 Wash, 20 lks. wide, course S.  
 Asc. 75 ft. over SW. slope to  
 80.00 Intersect the Sectional Guide Meridian, surveyed due North, bet. secs. 10 and 11 and bet. secs. 2 and 3, as hereinafter described.  
 At this point of intersection set an iron post, 3 ft. long, 2 ins. in diam., 3 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, supported by a md. of stone, for the cor. of secs. 2, 3, 34 and 35, with brass cap mkd.

T 22 S R 19 E  
 S 34 | S 35  
 S 3 | S 2  
 T 23 S  
 1927

No trees available.  
 Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, oak, juniper and pine.  
 Undergrowth, scruboak, manzanita, catclaw and cacti.

-----  
 East, on true line, bet. secs. 2 and 35.  
 Over mountainous land, thru scattering timber and dense undergrowth.

Asc. gradual S. slope.  
 0.45 Trail, brs. NW. - SE.  
 4.15 Spur, slopes SE.  
 Desc. 200 ft. over E. slope.  
 9.75 Wash, 10 lks. wide, course S.  
 Asc. 200 ft. over SW. slope.  
 30.16 Intersect the boundary of the Ft. Huachuca Military Reservation on the Huachuca Divide. At this point of intersection set an iron post 3 ft. long, 3 ins. in diam., 18 ins. in the ground to bed rock, supported by a md. of stone, for the closing cor. of secs. 2 and 35, Ts. 22 and 23 S., R. 19 E., with brass cap mkd.

T 22 S R 19 E  
 C C S 35 | U S M R  
 S 2  
 T 23 S  
 1927

from which

An oak, 8 ins. in diam., brs. N. 60° W., 27 lks. dist., mkd. T 22 S R 19 E S 35 C C B T.  
 A mountain mahogany, 7 ins. in diam., brs. S. 57½° W., 74 lks. dist., mkd. T 23 S R 19 E S 2 C C B T.

Note: This closing cor. monument, by survey of part of bdy. of Ft. Huachuca Military Reservation, becomes also Cor. No. 61 of said bdy., with appropriate marking added on the brass cap, and two additional bearing trees established as hereinafter described.

Land, mountainous.  
 Soil, rocky 4th rate.  
 Timber, oak, juniper and pine.  
 Undergrowth, scrub oak, mahogany, catclaw and cacti.

-----



Survey of Part  
of the boundary of the Ft. Huachuca Military Reservation, 23

Chains

From Cor. No. 37 hereinbefore described,  
Thence, along the Huachuca divide, in sec. 13, T. 23 S., R. 19 E.  
N. 65° 40' W.,  
5.50 Set an iron post 3 ft. long, 2 ins. in diam., 12 ins. in  
the ground to bedrock, supported by a md. stone, for  
Cor. No. 38, with brass cap mkd.

U S M R  
Cor. 38

S13  
T23S R19E

1927

from which,

a yellow pine, 10 ins. in diam., brs. N. 44° E., 35 lks.  
dist., mkd. USMR COR. 38 BT  
an oak, 4 ins. in diam., brs. S. 78° E., 55 lks.  
dist., mkd. BT  
an oak, 14 ins. in diam., brs. S. 77° W., 103 lks.  
dist., mkd. T23S R19E COR. 38 BT S13  
an oak, 4 ins. in diam., brs. S. 45° E., 51 lks.  
dist., mkd. BT

Thence,  
N. 84½° W.,  
5.20 Set an iron post 3 ft. long, 2 ins. in diam., 16 ins. in  
the ground to bedrock, supported by a md. stone, for  
cor. No. 39, with brass cap mkd.

U S M R  
Cor. 39

S13  
T23S R19E

1927

from which,

a yellow pine, 8 ins. in diam., brs. N. 20° E., 28 lks.  
dist., mkd. USMR COR 39 BT  
an oak, 16 ins. in diam., brs. N. 58° E., 54 lks.  
dist., mkd. USMR COR 39 BT  
a yellow pine, 6 ins. in diam., brs. S. 61½° E., 38 lks.  
dist., mkd. T23S R19E Cor. 39 BT S13  
an oak, 4 ins. in diam., brs. S. 31° W., 20 lks.  
dist., mkd. BT

Thence,  
S. 70° W.,  
3.05 Set an iron post 3 ft. long, 2 ins. in diam., 8 ins. in  
the ground to bedrock, supported by a md. stone, for  
Cor. No. 40, with brass cap mkd.

U S M R  
Cor. 40

T23S R19E

1927

from which,

a yellow pine, 12 ins. in diam., brs. N. 23½° E., 10 lks.  
dist., mkd. USMR COR 40 BT  
a yellow pine, 14 ins. in diam., brs. S. 64° E., 5 lks.  
dist., mkd. T23S R19E Cor. 40 BT S13  
a yellow pine, 10 ins. in diam., brs. S. 78° W., 35 lks.  
dist., mkd. T23S R19E Cor. 40 BT S13  
a yellow pine, 12 ins. in diam., brs. N. 21½° W., 88 lks.  
dist., mkd. USMR COR 40 BT

Survey of part  
24 of the boundary of the Ft. Huachuca Military Reservation.

Chains

- 15.17 Thence,  
N. 38° 41' W.,  
Set an iron post 3 ft. long; 2 ins. in diam., on bedrock, supported by a md. stone, for Cor. No. 41, with brass cap mkd.
- U S M R  
Cor. 41
- S13  
T23S R19E  
1927 from which,
- an oak, 6 ins. in diam., brs. N. 80° E., 26 lks.  
dist., mkd. USMR COR 41 BT  
an oak, 16 ins. in diam., brs. S. 28½° E., 74 lks.  
dist., mkd. T23S R19E COR 41 BT S13  
a pinion 4 ins. in diam., brs. N. 75½° W., 95 lks.  
dist., mkd. BT  
a pinion, 16 ins. in diam., brs. N. 18° W., 34 lks.  
dist., mkd. USMR COR 41 BT
- 10.19 Thence,  
N. 51° 16' W.,  
Set an iron post 3 ft. long 2 ins. in diam., 8 ins. in the ground to bedrock, supported by a md. stone, for Cor. No. 42, with brass cap mkd.
- U S M R  
Cor. 42
- S12  
T23S R19E  
1927 from which,
- a yellow pine, 14 ins. in diam., brs. N. 31° E., 33 lks.  
dist., mkd. USMR COR 42 BT  
an oak, 6 ins. in diam., brs. S. 82° W., 40 lks.  
dist., mkd. T23S R19E COR 42 BT S12  
an oak, 6 ins. in diam., brs. N. 57° W., 50 lks.  
dist., mkd. T23S R19E COR 42 BT S12  
an oak, 6 ins. in diam., brs. N. 10° W., 83 lks.  
dist., mkd. USMR COR 42 BT
- 5.82 Thence, along divide, in sec. 12.  
N. 47° 09' W.,  
Set an iron post 3 ft. long, 2 ins. in diam., 8 ins. in the ground to bedrock, supported by a md. stone, for Cor. No. 43, with brass cap mkd.
- U S M R  
Cor. 43
- S12  
T23S R19E  
1927 from which,
- an oak, 14 ins. in diam., brs. N. 66° E., 46 lks.  
dist., mkd. USMR COR 43 BT  
an oak, 8 ins. in diam., brs. S. 89° W., 53 lks.  
dist., mkd. T23S R19E COR 43 BT S12  
an oak, 12 ins. in diam., brs. N. 70½° W., 26 lks.  
dist., mkd. T23S R19E COR 43 BT S12  
an oak, 8 ins. in diam., brs. N. 44° W., 46 lks.  
dist.

Survey of part  
of the boundary of th Ft. Huachuca Military Reservation<sup>25</sup>

## Chains

- .. an oak, 8 ins. in diam., brs. N.24°W., 26 lks.  
dist., mkd. USMR COR 43 BT
- Thence,  
N.30 $\frac{1}{2}$ °W.,
- 8.00. Set an iron post 3 ft. long, 2 ins. in diam.,  
12 ins. in the ground to bedrock, supported by a md.  
of stone, for Cor.No.44,  
with brass cap mkd.
- At 0.10 chs., trail, brs.  
NE-SW.  
At 6.50 chs., trail, brs.  
N-SE.
- U S M R  
Cor.44
- S12  
T23S R19E  
1927 from which,  
a yellow pine, 10 ins. in diam., brs. S.85°E., 58 lks.  
dist., mkd. USMR COR 44 BT  
a yellow pine, 10 ins. in diam., brs. S.24°E., 175 lks.  
dist., mkd. T23S R19E COR 44 BT S12  
a mahogany, 4 ins. in diam., brs. N.58°W., 52 lks.  
dist., mkd. BT  
an oak, 6 ins. in diam., brs. N.15°W., 44 lks.  
dist., mkd. USMR COR 44 BT
- Thence,  
N.56°48'W.,
- 11.35 Set an iron post 3 ft. long, 2 ins. in diam., on bedrock,  
supported by a md. stone, for Cor. No.45, with brass  
cap mkd.
- U S M R  
Cor.45
- S12  
T23S R19E  
1927 from which,  
an oak, 10 ins. in diam., brs. N.21°E., 23 lks.  
dist., mkd. USMR COR 45 BT  
a madrono, 10 ins. in diam., brs. S.81°E., 46 lks.  
dist., mkd. USMR COR 45 BT  
a juniper, 4 ins. in diam., brs. S.24°E., 51 lks.  
dist., mkd. T23S R19E COR 45 BT S12  
a pinion, 4 ins. in diam., brs. S.52°W., 30 lks.  
dist., mkd. BT
- Thence,  
N.32°33'W.,
- 3.85 Set an iron post 3 ft. long, 2 ins. in diam., on bedrock,  
supported by a md. stone, for Cor. No.46, with brass  
cap mkd.
- U S M R  
Cor.46
- S12  
T23S R19E  
1927 from which,  
an oak, 10 ins. in diam., brs. N.22°E., 10 lks.  
dist., mkd. USMR COR 46 BT  
a yellow pine, 8 ins. in diam., brs. S.84°E., 25 lks.  
dist., mkd. USMR COR 46 BT  
a pinion, 8 ins. in diam., brs. S.17°E., 71 lks.  
dist., mkd. T23S R19E COR 46 BT S12

Survey of part  
26 of the boundary of the Ft. Huachuca Military Reservation.

Chains

. an oak, .8 ins. in diam., brs. S.59°W., 24 lks. dist.,  
mkd. T23S R19E COR 46 BT S12

Thence,

N.31°58'W.,

17.46

Set an iron post 3 ft. long, 2 ins. in diam., on bedrock, supported  
by a md. stone, for cor. No. 47, with brass cap mkd.

At 9.10 chs., cross  
trail, brs. NE-  
SW.

At 17.14 chs. intersect  
the closing cor.  
secs. 11 and 12  
hereinafter des-  
cribed.

U S M R  
Cor.47

S11  
T23S R19E

1927

from which,

a yellow pine, 8 ins. in diam., brs. N.35°E., 15 lks.  
dist.; mkd. USMR COR 47 BT

a yellow pine, 8 ins. in diam., br's. S.86°E., 49 lks.  
dist.; mkd. USMR COR 47 BT

an oak, 16 ins. in diam., brs. S.6°E., 54 lks.

dist.; mkd. T23S R19E COR 47 BT S11

an oak, 16 ins. in diam., brs. S.52°W., 35 lks.

dist.; mkd. T23S R19E COR 47 BT S11

Thence,

N.38°24'W., along divide, in sec. 11.

23.21

Set an iron post 3 ft. long, 2 ins. in diam., 14 ins.  
in the ground to bedrock, supported by a md. stone,  
for Cor. No. 48, with  
brass cap mkd.

At 5.00 chs., trail, brs.  
NW-SE. Along same.

At 6.00 chs., leave trail  
to N.45°W.

U S M R  
Cor.48

S11  
T23S R19E

1927

from which,

a yellow pine, 6 ins. in diam., br's. N.19°E., 57 lks.  
dist.; mkd. USMR COR 48 BT

an oak, 4 ins. in diam., brs. S.69°E., 33 lks.  
dist.; mkd. BT

an oak, 4 ins. in diam., brs. S.4°E., 54 lks.

dist.; mkd. BT

an oak, 4 ins. in diam., brs. N.62°W., 25 lks.

dist.; mkd. BT

Thence,

N.39°53'W.,

7.88

Set an iron post 3 ft. long, 2 ins. in diam.,  
12 ins. in the ground to bedrock, supported  
by a md. stone, for  
Cor. No. 49, with brass cap mkd.

At 2.40 chs., trail from E.,  
along same.

At 5.00 chs., leave trail,  
brs. SW.

U S M R  
Cor.49

S11  
T23S R19E

1927

from which,

Survey of part  
of the boundary of the Ft. Huachuca Military Reservation. 27

Chains

an oak, 6 ins. in diam., brs. N.61°E., 49 lks.  
dist., mkd. USMR COR 49 BT  
an oak, 6 ins. in diam., brs. S.42°E., 39 lks.  
dist., mkd. USMR COR 49 BT  
a madrono, 14 ins. in diam., brs. S.14°E., 65 lks.  
dist., mkd. T23S R19E COR 49 BT S11  
an oak, 10 ins. in diam., brs. N.84°W., 43 lks.  
dist., mkd. T23S R19E COR 49 BT S11

6.45 Thence,  
N.32½°W.,  
Set an iron post 3 ft. long, 2 ins. in diam., on bedrock,  
supported by a md. stone, for Cor. No.50, with brass  
cap mkd.

U S M R  
Cor.50

S11  
T23S R19E  
1927

from which,  
an oak, 10 ins. in diam., brs. N.64°E., 52 lks.  
dist., mkd. USMR COR 50 BT  
an oak, 10 ins. in diam., brs. N.4°E., 11 lks.  
dist., mkd. USMR COR 50 BT  
a yellow pine, 6 ins. in diam., brs. S.0°30'E., 41 lks.  
dist., mkd. T23S R19E COR 50 BT S11  
an oak, 12 ins. in diam., brs. N.73°W., 43 lks.  
dist., mkd. T23S R19E COR 50 BT S11

3.05 Thence,  
N.46½°W.,  
Set an iron post 3 ft. long, 2 ins. in diam., 12 ins. in  
the ground to bedrock, supported by a md. stone, for  
Cor. No.51, with brass cap mkd.

U S M R  
Cor.51

S11  
T23S R19E  
1927

from which,  
a yellow pine, 4 ins. in diam., brs. N.67°E., 17 lks.  
dist., mkd. BT only.  
a yellow pine, 6 ins. in diam., brs. S.18°E., 11 lks.  
dist., mkd. T23S R19E COR 51 BT S11  
a yellow pine, 10 ins. in diam., brs. S.58°W., 23 lks.  
dist., mkd. T23S R19E COR 51 BT S11  
a yellow pine, 6 ins. in diam., brs. N.19°W., 4 lks.  
dist., mkd. USMR COR 51 BT

19.30 Thence,  
S.79°48'W.,  
Set an iron post 3 ft. long, At 16.30 chs., trail,  
2 ins. in diam., on bedrock, brs. E-W.  
supported by a md. stone,  
for Cor. No. 52, with brass  
cap mkd.

U S M R  
Cor. 52

S11  
T23S R19E

1927 from which,  
an oak, 12 ins. in diam., brs. S.88°W., 74 lks.  
dist., mkd. T23S R19E COR 52 BT S11  
a madrono, 20 ins. in diam., brs. N.50°W., 22 lks.  
dist., mkd. T23S R19E COR 52 BT S11  
an oak, 12 ins. in diam., brs. N.44°E., 79 lks.  
dist.,

Survey of part  
28 of the boundary of the Ft. Huachuca Military Reservation.

Chains

an oak 8 ins. in diam., brs. N.44½°W., 79 lks.  
dist., mkd. USMR COR 52 BT

Thence,

N.46°46'W.,

20.25

Set an iron post 3 ft. long, 2 ins. in diam., on bedrock, supported by a md. stone, for Cor. No. 53, with brass cap mkd.

U S M R

Cor. 53

S11

T23S R19E

1927

from which,

an oak, 10 ins. in diam., brs. N.20°E., 39 lks.

dist., mkd. USMR COR 53 BT

an oak, 8 ins. in diam., brs. S.84°E., 40 lks.

dist., mkd. USMR COR 53 BT

an oak, 6 ins. in diam., brs. S.38½°E., 43 lks.

dist., mkd. T23S R19E COR 53 BT S11

an oak, 8 ins. in diam., brs. N.57°W., 31 lks.

dist., mkd. T23S R19E EDR 53 BT S11.

Thence,

N.13°19'W.,

16.52

Set an iron post 3 ft. long, 2 ins. in diam., 16 ins. in the ground to bedrock, supported by a md. stone, for Cor. No. 54, with brass cap mkd.

At 0.56 chs., intersect the closing cor. secs. 2 and 11 hereinafter described.

At 2.10 chs., trail, brs. E-W.

At 12.00 chs., leave trail to NE.

U S M R

Cor. 54

S2

T23S R19E

1927

from which,

an oak, 6 ins. in diam., brs. N.7°E., 34 lks.

dist., mkd. USMR COR 54 BT

an oak, 20 ins. in diam., brs. S.86°E., 55 lks.

dist., mkd. USMR COR 54 BT

a juniper, 30 ins. in diam., brs. S.32°W., 44 lks.

dist., mkd. T23S R19E COR 54 BT S2

a juniper, 24 ins. in diam., brs. N.28°W., 62 lks.

dist., mkd. T23S R19E COR 54 BT S2

Thence,

N.11°20'W., along divide in sec. 2.

13.48

Set an iron post 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bedrock, supported by a md. stone, for Cor. No. 55, with brass cap mkd.

At 2.50 chs., trail, brs. SE-111°W.

U S M R

Cor. 55

S2

T23S R19E

1927

from which,

Survey of part of the boundary of the Ft. Huachuca Military Reservation.

Chains

An oak, 10 ins. in diam., brs. N. 42° E., 54 lks. dist., mkd. U S M R COR 55 B T.
An oak, 10 ins. in diam., brs. N. 87° E., 90 lks. dist., mkd. U S M R COR 55 BT.
A madrono, 30 ins. in diam., brs. North, 13 lks. dist., mkd. T 23 S R 19 E COR 55 BT S 2.
An oak, 12 ins. in diam., brs. N. 22° W., 43 lks. dist., mkd. T 23 S R 19 E COR 55 BT S 2.

Thence

N. 34° 50' E.

2.70 Trail; brs. N. S.

6.70 Trail, brs. NE. SE.

23.05 Set an iron post, 3 ft. long, 2 ins. in diam., 16 ins. in the ground to bedrock, supported by a md. of stone for the Cor. No. 56, with brass cap marked

U S M R
Cor. 56

S 2
T 23 S R 19 E
1927

from which

A yellow pine, 8 ins. in diam., brs. N. 34° E., 15 lks. dist., mkd. U S M R COR 56 B T.
An oak, 4 ins. in diam., brs. S. 48° E., 5 lks. dist., mkd. B T.
An oak, 8 ins. in diam., brs. N. 87° W., 27 lks. dist., mkd. T 23 S R 19 E COR 56 B T S 2.
A yellow pine, 8 ins. in diam., brs. N. 62° W., 20 lks. dist., mkd. T 23 S R 19 E COR 56 B T S 2.

Thence N. 13° 33' W.

4.47 Set an iron post 3 ft. long, 2 ins. in diam., 10 ins. in the ground to bedrock, supported by a md. of stone, for Cor. No. 57, with brass cap marked

U S M R
Cor. 57

S 2
T 23 S R 19 E
1927

from which

A juniper, 30 ins. in diam., brs. N. 40° E., 22 lks. dist., mkd. U S M R COR 57 BT.
An oak, 4 ins. in diam., brs. S. 15° E., 17 lks. dist., mkd. B T.
An oak, 10 ins. in diam., brs. S. 32° W., 49 lks. dist., mkd. T 23 S R 19 E COR 57 B T S 2.
An oak, 6 ins. in diam., brs. S. 55° W., 42 lks. dist., mkd. T 23 S R 19 E COR 57 B T S 2.

Thence

N. 33° W.

3.81 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, supported by a md. stone, for Cor. No. 58, with brass cap mkd.

U S M R
Cor. 58

S 2
T 23 S R 19 E
1927


from which

A pinion, 6 ins. in diam., brs. N. 0° 30' E., 4 lks. dist., mkd. T 23 S R 19 E COR 58 BT S 2.

Survey of part of the boundary of the Ft. Huachuca Military Reservation.


Chains  
 .An oak, 4 ins. in diam., brs. N. 72° E., 54 lks. dist., mkd. B T.  
 .An oak, 6 ins. in diam., brs. south 6 lks. dist., mkd. T 23 S R 19 E COR 58 B T S 2.  
 .An oak, 8 ins. in diam., brs. S. 89° E., 12 lks. dist., mkd. U S M R COR 58 B T.

Thence N. 28½° E.  
 12.34 Set an iron post 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, supported by a md. of stone, for Cor. No. 59, with brass cap marked.




from which  
 An oak, 4 ins. in diam., brs. N. 59° E., 66 lks. dist., mkd. B T.  
 An oak, 14 ins. in diam., brs. S. 75½° E., 58 lks. dist., mkd. U S M R COR 59 B T.  
 An oak, 12 ins. in diam., brs. N. 86° W., 48 lks. dist., mkd. T 23 S R 19 E COR 59 B T S 2.  
 A juniper, 8 ins. in diam., brs. N. 32½° W., 54 lks. dist., mkd. T 23 S R 19 E COR 59 BT S 2.

Thence N. 1½° E.  
 9.32 Set an iron post 3 ft. long, 2 ins. in diam., on bedrock, supported by a md. of stone, for cor. No. 60, with brass cap marked



from which  
 An oak, 24 ins. in diam., brs. N. 70° E., 58 lks. dist., mkd. U S M R COR 60 BT.  
 A pine, 4 ins. in diam., brs. S. 21° E., 33 lks. dist., mkd. U S M R COR 60 BT.  
 An oak, 12 ins. in diam., brs. S. 70° W., 42 lks. dist., mkd. T 23 S R 19 E COR 60 B T S 2.  
 An oak, 10 ins. in diam., brs. S. 72° W., 119 lks. dist., mkd. T 23 S R 19 E COR 60 B T S 2.

Thence N. 1° 12' E.,  
 4.40 Intersect the closing corner of Secs. 2 and 35, Ts. 22 and 23 S., R. 19 E., hereinbefore described. Alter this cor. monument to also refer to Cor. 61 of the F. H. M. R. bdy. by placing additional marking on the brass cap, so that same now reads

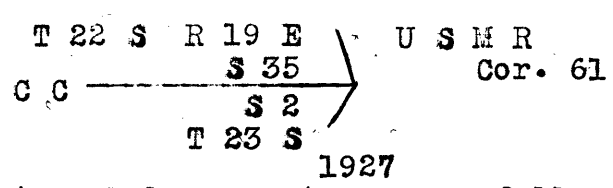

and establish two additional bearing trees, as follows:  
 An oak, 4 ins. in diam., brs. N. 2° E., 40 lks. dist., mkd. U S M R COR 61 B T.  
 A juniper, 16 ins. in diam., brs. S. 65° E., 5 lks. dist., mkd. U S M R COR 61 BT.



Boundaries of T.23 S., R.19 E.

Latitudes, departures and closing errors.

Line designated.	True Course.	Dist- ance.	Latitudes.		Departures.	
			N.	S.	E.	W.
South boundary.	West	480.46				480.46
West boundary.	N.0°19'W.	13.30	13.30			.07
	North	466.70	466.70			
North boundary. → Bdy. of Ft. Huachuca Mil. Res. →	East	350.37		182.01	350.37	
	Various	273.99	4.95		149.16	19.30
East boundary.	South	22.09		22.09		
	S.0° 7'E.	40.37		40.37	.08	
	S.0°16'E.	39.95		39.95	.19	
	S.0° 4'W.	40.24		40.24		.05
	S.0°13'W.	40.19		40.19		.15
	" "	40.32		40.32		.15
	S.0° 2'W.	40.29		40.29		.02
S.0° 1'W.	40.25		40.25		.01	
Convergency					.35	
Totals			484.95	485.71	500.15	500.21
				484.95		500.15
			Error in lat. ----- 0.76			
			Error in dep. -----			0.06

Chains

The cor. secs. 1, 2, 35 and 36, on S. Bdy., was established by S.E. Blout, U.S.C.E., 1923, and is an iron post 2 ins. in diam., firmly set, projecting 12 ins. above ground, with brass cap properly mkd. and witnessed by four properly mkd. hearing trees, one each NE, SE, SW and NW of cor.

Thence,

N.0° 1'W., on true line, bet. secs. 35 and 36.

Over mountainous land, thru scattering timber and undergrowth.

Asc. 313 ft. over SW slope to  $\frac{1}{4}$  sec. cor.

4.10

Head of wash, course SW.

33.00

Asc. becomes steeper.

40.00

Set an iron post 3 ft. long, 1 in. in diam., 2 ins. in the ground to bedrock, supported by a md. stone, for the  $\frac{1}{4}$  sec. cor. secs. 35 and 36, with brass cap mkd.

$\frac{1}{4}$

S35 | S36

1927

from which,

an oak, 14 ins. in diam., brs. N.38°E., 8 lks. dist., mkd.  $\frac{1}{4}$  S36 BT

an oak, 12 ins. in diam., brs. S.80°W., 36 lks. dist., mkd.  $\frac{1}{4}$  S35 BT

Asc. 555 ft. over SW slope.

55.00

Ridge, (Lone Mountain) brs. NW-SE.

Saddle brs. W. 2 chs.

Desc. 175 ft. over N. slope.

62.70

Wash, 20 lks. wide, course E.

Asc. 20 ft. over SE slope.

64.00

Spur, slopes E.

Desc. 75 ft. over NE slope.

64.90

Wash, 20 lks. wide, course NE.

Asc. gradual SE slope.

80.00

Spur, slopes NE.

Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for the cor. secs. 25, 26, 35 and 36, with brass cap mkd.

T23S R19E

S26 S25

S35 S36

1927

from which,

an oak, 6 ins. in diam., brs. N.43°E., 55 lks.

dist., mkd. T23S R19E S25 BT

an oak, 14 ins. in diam., brs. S.17°E., 42 lks.

dist., mkd. T23S R19E S36 BT

an oak, 6 ins. in diam., brs. S10 $\frac{1}{4}$ °W., 19 lks.

dist., mkd. T23S R19E S35 BT

an oak, 8 ins. in diam., brs. N.26°W., 62 lks.

dist., mkd. T23S R19E S26 BT

Land, mountainous.

Soil, rocky 4th. rate.

Timber, oak, juniper and pinion.

Undergrowth, scruboak, catclaw and cacti.

Thence,

East, on a random line, bet. secs. 25 and 36.

40.00

Set temp.  $\frac{1}{4}$  sec. cor.

80.04

Fall 5 lks. S. of the cor. secs. 25, and 36 on E. Bdy., hereinbefore described.

Survey of Part of the Subdivision Lines of T.23 S., R.19E. 33

Chains

Thence  
 S. 89° 58' W., on true line, bet. secs. 25 and 36.  
 Over mountainous land, thru scattering timber and dense undergrowth.  
 Desc. 54 ft. over SW slope.  
 5.50 Wash, 20 lks. wide, course SE.  
 Asc. 45 ft. over SE slope.  
 11.50 Spur, slopes SE.  
 Desc. 90 ft. over SW slope to wash.  
 17.70 Road, brs. N-S.  
 21.60 Wash, 100 lks. wide, 2 ft. deep, with small stream of water in same, course S.  
 Asc. 11 ft. over SE slope.  
 25.60 Spur, slopes SW.  
 Desc. 14 ft. over W. slope.  
 33.65 Wash, 20 lks. wide, 2 ft. deep, course SW.  
 Asc. 39 ft. over SE slope.  
 39.50 Spur, slopes S.  
 Desc. gradual SW slope to  
 40.02 Set an iron post 3 ft. long, 1 in. in diam., 2 ins. in the ground to bedrock, supported by a md. stone, for the 1/4 sec. cor. secs. 25 and 36, with brass cap mkd.

1/4 S25  
 -----  
 S36

1927 from which,  
 a juniper, 20 ins. in diam., brs. S. 59° E., 67 lks. dist., mkd. 1/4 S36 BT  
 an oak, 14 ins. in diam., brs. N. 31 1/2° W., 40 lks. dist., mkd. 1/4 S25 BT

40.25 Desc. gradual SW slope.  
 Wash, 20 lks. wide, course SE.  
 Asc. gradual NE slope.  
 41.10 Spur, slopes S.  
 Desc. 102 ft. over SW slope.  
 53.45 Wash, 100 lks. wide, 2 ft. deep. course SE.  
 Asc. 104 ft. over NE slope.  
 58.10 Spur, slopes SE.  
 Desc. 127 ft. over SW slope.  
 65.90 Wash, 100 lks. wide, course SE.  
 Asc. 216 ft. over NE slope to  
 80.04 the cor. secs. 25, 26, 35 and 36.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, oak, juniper and pinion.  
 Undergrowth, scruboak, catclaw and cacti.

N. 0° 1' W., on true line, bet. secs. 25 and 26.  
 Over mountainous land, thru scattering timber and dense undergrowth.  
 Desc. 164 ft. over N. slope.  
 16.00 Wash, 100 lks. wide, 2 ft. deep, course SE.  
 16.93 A point on N. bank of wash, from which traverse to spring as follows:  
 S. 30 1/4° E., 6.70 chs. Thence,  
 South, 1.00 ch. to spring of good water on S. side of wash (Wire corral around spring.)

## Chains

- Asc. 275 ft. over SW slope to  $\frac{1}{4}$  sec. cor.  
 39.50 Spur, slopes W.  
 Desc. gradual NW slope to  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground for the  $\frac{1}{4}$  sec. cor. secs. 25 and 26, with  
 brass cap mkd.
- $\frac{1}{4}$   
 S26 S25
- 1927 from which,  
 an oak, 4 ins. in diam., brs. S.55°E., 36 lks.  
 dist., mkd.  $\frac{1}{4}$  S25 BT  
 an oak, 14 ins. in diam., brs. N.55°W., 13 lks.  
 dist., mkd.  $\frac{1}{4}$  S26 BT.
- Desc. gradual NW slope..  
 40.20 Head of wash, course SW.  
 Asc. 105 ft. over SW slope.  
 51.50 Desc. 197 ft. over NW slope.  
 66.10 Wash, 30 lks. wide, 2 ft. deep, course W.  
 Trail, in same brs. E-W.  
 Asc. 145 ft. over S. slope to  
 79.50 Spur, slopes SW.  
 Desc. gradual NW slope to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 16 ins. in  
 the ground to bedrock, supported by a md. stone, for  
 the cor. secs. 23, 24, 25 and 26, with brass cap mkd.
- T23S R19E  
 S23 S24  
 -----  
 S26 S25
- 1927 from which,  
 an oak, 10 ins. in diam., brs. N.8°E., 13 lks.  
 dist., mkd. T23S R19E S24 BT  
 a juniper, 12 ins. in diam., brs. S.20°E., 34 lks.  
 dist., mkd. T23S R19E S25 BT  
 an oak, 8 ins. in diam., brs. S.42°W., 109 lks.  
 dist., mkd. T23S R19E S26 BT  
 an oak, 4 ins. in diam., brs. N.78°W., 20 lks.  
 dist., mkd. BT
- Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, oak, juniper and pinion.  
 Undergrowth, scruboak, catclaw and cacti.
- 
- N.89°58'E., on random line, bet. secs. 24 and 25.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.32 Wall 14 lks. N. of cor. secs. 24 and 25 on E. Bdy., here-  
 inbefore described.  
 thence,  
 N.89°56'W., on true line, bet. secs. 24 and 25.  
 Over mountainous land, thru scattering timber and dense  
 undergrowth.  
 Asc. 237 ft. over steep E. slope.  
 4.80 Spur, slopes SE.  
 Desc. gradual SW slope.  
 7.80 Head of wash, course SE.  
 Asc. gradual SE slope.  
 8.30 Spur, slopes S.

Survey of Part of the Subdivision Lines of T.23 S., R.19 E. 35

Chains	
40.16	<p>Desc. 328 ft. over SW slope to            Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in            the ground to bedrock, supported by a md. stone, for the  <math>\frac{1}{4}</math> sec. cor. secs. 24 and 25, with brass cap mkd.</p>
	<p style="text-align: center;"><math>\frac{1}{4}</math> <math>\frac{S. 24.}{S 25}</math></p>
	<p style="text-align: center;">1927</p> <p>from which,            a juniper 8 ins. in diam., brs. S.24°E., 47 lks.            dist., mkd. <math>\frac{1}{4}</math> S25 BT            an oak, 14 ins. in diam., brs. N.80°W., 38 lks.            dist., mkd. <math>\frac{1}{4}</math> S24 BT</p>
40.50	<p>Desc. gradual SW slope.            Wash, 20 lks. wide, course SE.</p>
51.10	<p>Asc. 260 ft. over NE slope.            Ridge, brs. NE-SW.</p>
72.30	<p>Desc. 687 ft. over broken S. slope.            Spur, slopes SW.</p>
80.32	<p>Desc. gradual NW slope to            the cor. secs. 23, 24, 25 and 26.</p>
	<p>Land, mountainous.            Soil, rocky 4th. rate.            Timber, oak, juniper and pinion.            Undergrowth, scruboak, catclaw and cacti.</p>
-----	
	<p>N.0° W., on true line, bet. secs. 23 and 24.            Over mountainous land, thru scattering timber and dense            undergrowth.</p>
12.95	<p>Desc. 87 ft. over NW slope.            Wash, 20 lks. wide, course SW.</p>
	<p>(This wash joins one from N., about 50 lks. SW.)</p>
13.50	<p>Asc. gradual SE slope.            Spur, slopes W.</p>
14.00	<p>Desc. gradual NW slope.            Wash, 20 lks. wide, course SW, from N.</p>
15.30	<p>Asc. gradually up same.            Leave wash to NE.</p>
17.00	<p>Asc. 20 ft. over SE slope.            Spur, slopes SE.</p>
18.00	<p>Desc. 10 ft. over NE slope.            Wash, 10 lks. wide, course SE.</p>
40.00	<p>Asc. 682 ft. over S. slope to            Set an iron post 3 ft. long, 2 in. in diam., 8 ins. in            the ground to bedrock, deposit a stone mkd. with a cross            (X) at base of post, supported by a md. stone, for the  <math>\frac{1}{4}</math> sec. cor. secs. 23 and 24, with brass cap mkd.</p>
	<p style="text-align: center;"><math>\frac{1}{4}</math></p> <p style="text-align: center;">S23   S24</p>
	<p style="text-align: center;">1927</p> <p>No bearing trees available.</p>
41.50	<p>Asc. 48 ft. over SW slope.            Asc. 325ft. over NW slope to spur.</p>
55.00	<p>Head of wash, course SW.</p>
71.00	<p>Spur, slopes SE.            Desc. 41 ft. over NE slope to cor.</p>

Chains

- 74.33 intersect the SE. end line (1-2) of the "Tenorite" pat. mining claim of Mineral. Surv. No. 2066, at 3.02 chs., S. 52° 35' W., from cor. No. 1 thereof.  
Thence across said claimd.
- 78.56 intersect NE side line (1-4) of the "Tenorite" pat. mining claim, of Mineral. Surv. No. 2066, at 3.40 chs., N. 44° 52' W., from cor. No. 1 thereof.  
Leave "Tenorite" pat. mining claim.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for the cor. secs. 13, 14, 23 and 24, with brass cap mkd.

T23S R19E  
S14 S13  
-----  
S23 S24

- 1927 from which,
- an oak, 6 ins. in diam., brs. N. 25° E., 27 lks.  
dist., mkd. BT only.
- an oak, 10 ins. in diam., brs. S. 61½° E., 20 lks.  
dist., mkd. T23S R19E S24 BT
- an oak, 14 ins. in diam., brs. S. 28° W., 56 lks.  
dist., mkd. T23S R19E S23 BT
- a yellow pine, 12 ins. in diam., brs. N. 34½° W., 72 lks.  
dist., mkd. T23S R19E S14 BT

Land, mountainous.  
Soil, rocky 4th. rate.  
timber, oak, juniper and pine.  
undergrowth, scruboak, manzanita, catclaw and cacti.

- 40.00 S. 89° 56' E., on a random line, bet. secs. 13 and 24.  
Set temp. ¼ sec. cor.
- 80.04 Fall 9 lks. N. of the cor. secs. 13 and 24 on E. bdy.,  
hereinbefore described.  
Thence,  
N. 89° 52' W., on true line, bet. secs. 13 and 24.  
Over mountainous land, thru thick timber and undergrowth.  
Desc. 357 ft. over SW. slope, across patented mining claim.
- 3.08 intersect the NW. side line (1-2) of the "Silver King" pat.  
mining claim, Min. Sur. No. 2067 at 4.09 chs. N. 30½° E.,  
from cor. No. 1 thereof.  
Leave "Silver King" pat. mining claim.
- 20.00 Wash in Gance Canyon, 1 ch. wide, 2 ft. deep, course NW.  
An old house brs. N., about 3 chs. dist.
- 20.90 tunnel on line.
- 24.30 Asc. 127 ft. over NE slope, to spur.
- Trail, brs. NW-SE.
- 27.50 Spur, slopes NW.  
Desc. 134 ft. over NW slope.
- 34.50 Wash, 30 lks. wide, course NW.  
Asc. 104 ft. over NE slope to
- 40.02 Set an iron post 3 ft. long, 1 in. in diam., 14 ins. in  
the ground to bedrock, supported by a md. stone, for  
the ¼ sec. cor. secs. 13 and 24 with brass cap mkd.

¼ S13  
-----  
S24

- 1927 from which,
- an oak, 4 ins. in diam., brs. N. 2° E., 5 lks.  
dist., mkd. BT
- a juniper, 12 ins. in diam., brs. S. 13° E., 43 lks.  
dist., mkd. ¼ S24 BT

Survey of Part of the Subdivision Lines of T.23 S., R.19 E. 37

Chains

From the 1/4 sec. cor. secs. 13 and 24, U.S.L.M. No.2066, which is a wooden post 6 ins. in diam., firmly set and projecting 5 ft. above ground and md. stone, mkd. USLM No.2066 on E. face, brs. N.76°09'W., 12.38 chs.

- Asc. 23 ft. over NE slope.
- 42.00 Ridge, brs. NW-SE.
- Desc. 119 ft. over SW slope.
- 52.30 Head of wash, course SE.
- Asc. 166 ft. over SE slope.
- 67.80 Spur, slopes S.
- Desc. 257 ft. over SW slope.
- 76.70 Wash, 20 lks. wide, course SE.
- Asc. 95 ft. over NE slope to
- 80.02 The cor. secs. 13, 14, 23 and 24.

Land, mountainous.  
Soil, rocky 4th. rate.  
Timber, oak, juniper, pinion and yellow pine.  
Undergrowth, scruboak, manzanita, catclaw and cacti.

N.0° 1'W., on true line, bet. secs. 13 and 14.  
Over mountainous land, thru thick timber and dense undergrowth.

- Desc. 40 ft. over NE slope.
- 3.90 Head of wash, course SE.
- Asc. 286 ft. over SW slope.
- 16.00 Ridge, bears SE and W.
- Desc. 454 ft. over N. slope to 1/4 sec. cor.
- 21.65 Head of wash, course N.
- Continue down same.
- 38.15 Leave wash to NE.
- Asc. gradual SE slope to
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, supported by a md. stone, for the 1/4 sec. cor. secs. 13 and 14, with brass cap mkd.

1/4

S14 S13

1927

from which,

an oak, 8 ins. in diam., brs. S.32°E., 23 lks.  
dist., mkd. 1/4 S13 BT  
a juniper, 18 ins. in diam., brs. N.80°W., 10 lks.  
dist., mkd. 1/4 S14 BT

- Asc. 28 ft. over SE slope.
- 47.90 Spur, slopes NE.
- Continue gradual asc. along W. slope.
- 59.30 Same spur, slopes NW.
- Desc. 490 ft. over N. slope to canyon bottom.
- 60.40 Top of cliff, facing N. ; desc. 100 ft. over vertical wall.
- 60.50 Foot of cliff.
- 76.30 Wash in bottom of Glance Canyon, 100 lks. wide, course NW.
- Asc. 45 ft. over SW slope to cor.
- 77.30 Old road, brs. NW-SE.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 22 ins. in the ground to bedrock, supported by a md. stone, for the cor. secs: 11, 12, 13 and 14, with brass cap mkd.

Chains

T23S R19E

S11 S12

S14 S13

1927 from which,  
 an oak, 8 ins. in diam., brs. N.58°E., 65 lks.  
 dist., mkd. T23S R19E S12 BT  
 an oak, 6 ins. in diam., brs. S.72½°E., 30 lks.  
 dist., mkd. T23S R19E S13 BT  
 an oak, 4 ins. in diam., brs. S.12°W., 35 lks.  
 dist., mkd. BT  
 an oak, 4 ins. in diam., brs. N.54½°W., 22 lks.  
 dist., mkd. BT

Land, mountainous.

Soil, rocky 4th. rate.

Timber, oak, juniper, pinion and yellow pine.

Undergrowth, scruboak, manzanita, catclaw and cacti.

S.89°52'E., on true line, bet. secs. 12 and 13.

Over mountainous land, thru thick timber and dense undergrowth.

32.50 Asc. 866 ft. over rough, broken SW slope to Divide; intersect the Bdy. of the Ft. Huachuca Military Reservation at 5.75 chs., N.51°16'W. of Cor. No. 41 thereof, hereinbefore described.

At intersection, set an iron post, 3 ft. long, 2 ins. in diam., 16 ins. in the ground to bedrock, supported by a md. stone, for the closing cor. secs. 12 and 13, with brass cap mkd.

T23S  
 CC S12 USMR  
 S13  
 R19E

1927 from which,  
 a madrono, 16 ins. in diam., brs. S.48°E., 27 lks.  
 dist., mkd. T23S R19E S13 CC BT  
 an oak, 16 ins. in diam., brs. N.71°W., 23 lks.  
 dist., mkd. T23S R19E S12 CC BT

Land, mountainous.

Soil, rocky 4th. rate.

Timber, oak, juniper, madrono and yellow pine.

Undergrowth, scruboak, manzanita, madrono and cacti.

From cor. secs. 11, 12, 13 and 14, N.0° 1'W., on true line bet. secs. 11 and 12.

Over mountainous land, thru thick timber and dense undergrowth.


7.50 Asc. 107 ft. over SW slope.  
 10.30 Desc. 40 ft. over NW slope.  
 Wash, 10 lks. wide, course W.  
 36.75 Asc. 295 ft. over SW slope to divide.  
 Trail, brs. NW-SE.  
 37.50 Divide, brs. NW-SE. Intersect the Bdy. of the Ft. Huachuca Military Reservation at 32 lks, S.31°58'E., from Cor. No. 47 thereof, hereinbefore described.



Survey of part of the Subdivision Lines of T.23 S., R.19 E. 39

Chains

At intersection set an iron post 3 ft. long, 2 ins. in diam., on bedrock, supported by a mound of stone, for the closing cor. secs. 11 and 12, with brass cap mkd.



from which, a yellow pine, 10 ins. in diam., brs. S.4°E., 150 lks. dist., mkd. T23S R19E S12 CCBT a madrono, 18 ins. in diam., brs. S.50°W., 26 lks. dist., mkd. T23S R19E S11 CCBT

Land, mountainous. Soil, rocky 4th. rate. Timber, yellow pine, oak and juniper and madrono. Undergrowth, scruboak, manzanita, catclaw and aacti.

The cor. secs. 2, 3, 34 and 35 on the S. Bdy. of Tp. is an iron post 2 ins. in diam., firmly set and projecting 34 ins. above ground and mound of stone, with brass cap properly mkd. and witnessed by three properly mkd. bearing trees, one each NE, SE and NW of cor.

Thence, N.0° 1'W., on true line, bet. secs. 34 and 35. Over rolling land, thru scattering timber and undergrowth. Asc. 30 ft. over E. slope.


22.00 Desc. 90 ft. over N. slope.

27.70 Wash, 10 lks. wide, course E.

29.60 Wash, 10 lks. wide, course E.

40.00 Asc. 60 ft. over S. slope, to

Set an iron post 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock, supported by a md. stone, for the 1/4 sec. cor. sections 34 and 35 with brass cap mkd.



from which, an oak, 12 ins. in diam., brs. N.20°W., 46 lks. dist., mkd. 1/4 S34 BT

an oak, 12 ins. in diam., brs. S.74 1/2°E., 107 lks. dist., mkd. 1/4 S35 BT

40.20 Asc. gradual SW slope. Spur, slopes SE.


43.70 Desc. 80 ft. over NE slope.

44.20 S. edge of wash. 2 ft. deep, course SE.

67.70 N. edge of wash; asc. 180 ft. over gradual S. slope to cor.

80.00 Wash, 10 lks. wide, course SW.

Set an iron post 3 ft. long, 2 ins. in diam., 25 ins. in the ground, for the cor. secs. 26, 27, 34 and 35, with brass cap mkd.



from which, an oak, 10 ins. in diam., brs. N.69 1/2°E., 25 lks. dist., mkd. T23S R19E S26 BT

an oak, 11 ins. in diam., brs. S.45°E., 10 lks. dist.,

## Chains

an oak, 11 ins. in diam., brs. S.43 $\frac{1}{4}$ °E., 67 lks.  
 dist., mkd. T23S R19E S35 BT  
 an oak, 14 ins. in diam., brs. S.52 $\frac{3}{4}$ °W., 122 lks.  
 dist., mkd. T23S R19E S34 BT  
 an oak, 12 ins. in diam., brs. N.51 $\frac{1}{4}$ °W., 169 lks.  
 dist., mkd. T23S R19E S27 BT

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, oak and juniper.  
 Undergrowth, scruboak, manzanita, catclaw and cacti.

40.00 East, on a random line, bet. secs. 26 and 35.  
 79.76 Set temp.  $\frac{1}{4}$  sec. cor.  
 Fall 2 lks. S. of the cor. secs. 25, 26, 35 and 36.  
 Thence,  
 S.89°59'W., on true line, bet. secs. 26 and 35.  
 Over mtns. land, thru scattering timber and dense under-  
 growth.  
 16.95 Asc. 520 ft. over NE slope.  
 Ridge (Lone Mtn.) brs. NW-SE.  
 39.88 Desc. 580 ft. over SW slope.  
 Set an iron post 3 ft. long, 2 in. in diam., 8 ins. in  
 the ground to bedrock, supported by a md. stone, for  
 the  $\frac{1}{4}$  sec. cor. secs. 26 and 35, with brass cap mkd.

$\frac{1}{4}$  S 26  
 S 35

1927 from which,  
 an oak, 12 ins. in diam., brs. N.25°W., 63 lks.  
 dist., mkd.  $\frac{1}{4}$  S26 BT  
 a yellow pine, 14 ins. in diam., brs. S.21 $\frac{1}{4}$ °E., 74 lks.  
 dist., mkd.  $\frac{1}{4}$  S35 BT  
 48.95 Desc. 256 ft. over SW slope to wash.  
 Small spring on line.  
 62.75 Wash, 10 lks. wide, course SE.  
 Asc. 60 ft. over NE slope.  
 65.90 Spur, slopes S.  
 Desc. 30 ft. over SW slope.  
 71.15 Wash, 10 lks. wide, course S.  
 Asc. 54 ft. over SW slope to  
 79.76 The cor. secs. 26, 27, 34 and 35.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, oak and juniper.  
 Undergrowth, scruboak, manzanita, catclaw and cacti.

N.0° 1'W., on true line, bet. secs. 26 and 27.  
 Over mountainous land, thru scattering timber and dense  
 undergrowth.  
 5.50 Asc. 118 ft. over SW slope.  
 Spur, slopes W.  
 9.90 Desc. 70 ft. over NW slope.  
 Wash, 10 lks. wide, course SW.  
 Asc. 20 ft. over SW slope.  
 16.30 Spur, slopes SE.  
 Desc. 52 ft. over NE slope.

Survey of part of the Subdivision Lines of T.23 S., R.19 E., 41


Chains

21.50 Desc. 52 ft. over NE slope.  
 Wash, 10 lks. wide, course SE.  
 Asc. 73 ft. over SW slope.

27.90 Spur, slopes W.  
 Desc. 31 ft. over N. slope.

30.10 Wash, 5 lks. wide, course W.  
 Asc. 110 ft. over SW slope to

40.00 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in  
 the ground to bedrock, supported by a md. stone, for  
 the  $\frac{1}{4}$  sec. cor. secs. 26 and 27, with brass cap mkd.




1927

from which,  
 an oak, 9 ins. in diam., brs. N.36°E., 56 lks.  
 dist., mkd.  $\frac{1}{4}$  S26 BT  
 an oak, 18 ins. in diam., brs. N.63 $\frac{1}{4}$ °W., 50 lks.  
 dist., mkd.  $\frac{1}{4}$  S27 BT

63.50 Asc. 582 ft. over SW slope.  
 Lone Mtn. ridge, brs. NW-SE.

80.00 Desc. 374 ft. over NE slope to  
 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in  
 the ground for the cor. secs. 22, 23, 26 and 27, with  
 brass cap mkd.



1927

from which,  
 an oak, 9 ins. in diam., brs. N.52 $\frac{3}{4}$ °E., 29 lks.  
 dist., mkd. T23S R19E S23 BT  
 an oak, 12 ins. in diam., brs. S.40°E., 30 lks.  
 dist., mkd. T23S R19E S26 BT  
 an oak, 8 ins. in diam., brs. S.51°W., 28 lks.  
 dist., mkd. T23S R19E S27 BT  
 an oak, 8 ins. in diam., brs. N.34°W., 52 lks.  
 dist., mkd. T23S R19E S22 BT

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, oak, juniper and yellow pine.  
 Undergrowth, scruboak, manzanita, catclaw and cacti.

40.00 N.89°59'E., on random line, bet. secs. 23 and 26.  
 Set temp.  $\frac{1}{4}$  sec. cor.

79.76 Fall 7 lks. N. of the cor. secs. 23, 24, 25 and 26.  
 Thence,  
 N.89°58'W., on true line, bet. secs. 23 and 26.  
 Over mountainous land, thru scattering timber and dense  
 undergrowth.

5.25 Desc. 100 ft. over W. slope.  
 Wash, 30 lks. wide, course S.  
 Asc. 60 ft. over E. slope to spur.

5.95 Trail, brs. N-S.


9.75 Spur, slopes S.

25.60 Desc. 80 ft. over SW slope to wash.

32.75 Ravine, 40 lks. wide, 20 ft. deep, course S.  
 Wash, 10 lks. wide, course SE.  
 Asc. 110 ft. over NE slope to

Chains

39.88 Spur, slopes S.  
Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the  $\frac{1}{4}$  sec. cor. secs. 23 and 26, with brass cap mkd.




1927 from which,  
an oak, 10 ins. in diam.; brs. N.43°W., 64 lks. dist., mkd.  $\frac{1}{4}$  S23 B<sup>4</sup>  
a juniper, 8 ins. in diam., brs. S.4 $\frac{1}{2}$ °E., 49 lks. dist., mkd.  $\frac{1}{4}$  S26 BT

54.45 Desc. 45 ft. over W. slope.  
Ravine, 50 lks. wide, 15 ft. deep, course S.  
Asc. 110 ft. over NE slope to cor.  
61.55 Wash, 10 lks. wide, course SE.  
79.76 The cor. secs. 22, 23, 26 and 27.

Land, mountainous.  
Soil, rocky 4th. rate.  
Timber, oak and juniper.  
Undergrowth, scruboak, catclaw and cacti.


N.0° 1'W., on true line, bet. secs. 22 and 23.  
Over mountainous land, thru scattering timber and dense undergrowth.

19.40 Desc. 120 ft. over NE slope.  
Wash, 30 lks. wide, course W.  
21.00 Wash, 20 lks. wide, 8 ft. deep, course W.  
Asc. 110 ft. over SW slope to spur.  
25.90 Trail, brs. NW-SE.  
33.10 Spur, slopes NW.  
40.00 Desc. 90 ft. over NE slope to  
Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the  $\frac{1}{4}$  sec. cor. secs. 22 and 23, with brass cap mkd.



1927 from which,  
a juniper, 14 ins. in diam., brs. N.52 $\frac{1}{4}$ °W., 38 lks. dist., mkd.  $\frac{1}{4}$  S22 BT  
a juniper, 12 ins. in diam., brs. S.34 $\frac{1}{8}$ °E., 68 lks. dist., mkd.  $\frac{1}{4}$  S23 BT

41.50 Desc. gradual NE slope.  
Wash, 10 lks. wide, course SW.  
Asc. 240 ft. over SW slope.  
65.00 Spur, slopes W.  
Desc. 80 ft. over N. slope.  
68.20 Wash, 10 lks. wide, course W.  
Asc. 20 ft. over S. slope.  
75.00 Wash, 10 lks. wide, 8 ft. deep, course SW.  
Asc. 40 ft. over S. slope to  
80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for the cor. secs. 14, 15, 22 and 23, with brass cap mkd.



1927 from which,

Survey of part of the Subdivision Lines of T.23 S..R.19 E. 43

Chains

a juniper, 13 ins. in diam., brs. N.23 $\frac{1}{4}$ °E., 80 lks.  
 dist., mkd. T23S R19E S14 BT  
 a juniper, 18 ins. in diam., brs. S.70 $\frac{1}{4}$ °E., 101 lks.  
 dist., mkd. T23S R19E S23 BT  
 an oak, 14 ins. in diam., brs. S.23°W., 104 lks.  
 dist., mkd. T23S R19E S22 BT  
 a juniper, 14 ins. in diam., brs. N.80 $\frac{1}{2}$ °W., 82 lks.  
 dist., mkd. T23S R19E S15 BT

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, oak, juniper and yellow pine.  
 Undergrowth, scruboak, mahogany and cacti.

40.00 S.89°58'E., on random line, bet. secs. 14 and 23.  
 79.72 Set temp.  $\frac{1}{4}$  sec. cor.  
 Fall 14 lks. N. of cor. secs. 13, 14, 23 and 24.  
 Thence,  
 N.89°52'W., on true line, bet. secs. 14 and 23.  
 Over mountainous land, thru scattering timber and dense  
 undergrowth.  
 1.44 Asc. 200 ft. over H. slope to spur.  
 Intersect the NE. side line (1-4) of the "Tenorite" pat. min-  
 ing claim, a Min. Surv. No. 2066, at 5.41 chs. N.44°52'W.,  
 from cor. No. 1 thereof.  
 Thence across said claim.  
 6.70 Spur, slopes S.  
 Desc. 180 ft. over W. slope, to wash.  
 14.29 Intersect the SW. side line ~~62-54~~ of the "Tenorite" pat.  
 mining claim at 9.36 chs. S.44°52'E., from cor. No. 3  
 thereof.  
 Leave pat. mining claim.  
 14.50 Wash, 10 lks. wide, course S.  
 Asc. 170 ft. over SE slope.  
 24.20 Spur, slopes SW.  
 Desc. 130 ft. along S. slope.  
 35.30 Spur, slopes SW.  
 Desc. 115 ft. over W. slope to  
 39.86 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground for the  $\frac{1}{2}$  sec. cor. secs. 14 and 23, with  
 brass cap mkd.

$\frac{1}{4}$   $\frac{S14}{S23}$


1927 from which,  
 an oak, 8 ins. in diam., brs. N.50 $\frac{1}{4}$ °E., 38 lks.  
 dist., mkd.  $\frac{1}{4}$  S14 BT  
 an oak, 8 ins. in diam., brs. S.31 $\frac{1}{4}$ °E., 21 lks.  
 dist., mkd.  $\frac{1}{4}$  S23 BT

55.70 Desc. 390 ft. over NW slope.  
 Head of wash, course S.  
 Asc. 15 ft. over SE slope.  
 58.70 Spur, slopes SW.  
 Desc. 210 ft. over NW slope.  
 66.70 Wash, 10 lks. wide, course SW.  
 Asc. 15 ft. over NE slope.  
 67.70 Desc. 115 ft. over SW slope to  
 79.72 The cor. secs. 14, 15, 22 and 23.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, oak, pine and juniper.  
 Undergrowth, scruboak, manzanita, mahogany and cacti.

Chains

N.0° 1' W., on true line, bet. secs. 14 and 15.  
 Over mountainous land, thru scattering timber and dense undergrowth.  
 Desc. gradual N. slope.  
 3.50 Wash. 10 lks. wide, 7 ft. deep, course SW.  
 Asc. 336 ft. over S. slope, to spur.  
 12.00 Asc. over vertical bluff facing S., 40 ft. high.  
 18.70 Spur, slopes W.  
 Desc. 15 ft. over NW slope.  
 22.30 Asc. 170 ft. over SW slope.  
 31.90 Ridge, brs. E-W.  
 Desc. 120 ft. over NW slope, to  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, supported by a md. stone, for the  $\frac{1}{4}$  sec. cor. secs. 14 and 15, with brass cap mkd.




1927

from which,

a yellow pine, 12 ins. in diam., brs. S.80°E., 51 lks. dist., mkd.  $\frac{1}{4}$  S14 BT  
 a yellow pine, 9 ins. in diam., brs. S.65 $\frac{1}{2}$ °W., 64 lks. dist., mkd.  $\frac{1}{4}$  S15 BT

42.10 Desc. 110 ft. over NW slope.  
 Wash, 10 lks. wide, course W.  
 Asc. 250 ft. over SW slope.  
 50.50 Spur, slopes W.  
 Desc. 570 ft. over N. slope.  
 70.30 Wash. 10 lks. wide, course NW.  
 Desc. 57 ft. over NE slope to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for the cor. secs. 10, 11, 14 and 15, with brass cap mkd.



1927

from which,

a juniper, 16 ins. in diam., brs. N.51 $\frac{1}{2}$ °E., 66 lks. dist., mkd. T23S R19E S11 BT  
 an oak, 10 ins. in diam., brs. S.64 $\frac{1}{4}$ °E., 24 lks. dist., mkd. T23S R19E S14 BT  
 a juniper, 24 ins. in diam., brs. S.34 $\frac{1}{2}$ °W., 77 lks. dist., mkd. T23S R19E S15 BT  
 an oak, 9 ins. in diam., brs. N.47 $\frac{1}{2}$ °W., 56 lks. dist., mkd. T23S R19E S10 BT

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, oak, juniper and pine.  
 Undergrowth, scruboak, manzanita, mahogany and cacti.

40.00 S.89°52'E., on a random line, bet. secs. 11 and 14.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.62 Fall 23 lks. N. of cor. secs. 11, 12, 13 and 14.  
 Thence,  
 N.89°42'W., on true line, bet. secs. 11 and 14.  
 Over mountainous land, thru heavy timber and dense undergrowth.  
 Desc. 120 ft. over SW slope to wash.

## Survey of part of the Subdivision Lines of T.23 S., R.19 E. 45

## Chains

- 5.30 Old road, brs, NW-SE.  
 7.10 Wash, 10 lks. wide, course NW.; a small stream of running water in same. Wash is in bottom of Glance Canyon.  
 Asc. 33 ft. over NE slope.  
 9.10 Desc. 17 ft. over SW slope.  
 11.30 Wash, 10 lks. wide, course N.  
 Asc. 100 ft. over NE slope.  
 17.80 Ridge, bears NW-SE.  
 Desc. 82 ft. over SW slope.  
 23.10 Wash, 10 lks. wide, course S.  
 Asc. 15 ft. over SE slope.  
 24.80 Spur, slopes SW.  
 Desc. 210 ft. over W. slope to  
 39.86 True point for the  $\frac{1}{4}$  sec. cor. falls in wash bottom where it is impracticable to monument the corner, therefore establish witness cor. as hereinafter described.  
 39.90 Wash, 20 lks. wide, course NW.  
 Asc. gradual NE slope to  
 39.92 Set an iron post  $\frac{3}{4}$  ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, supported by a md. stone, for the witness cor. to  $\frac{1}{4}$  sec. cor. secs. 11 and 14, with brass cap mkd.

$\frac{1}{4}$  S 11 WC  
 $\frac{1}{4}$  S 14

1927

from which,


an oak, 10 ins. in diam., brs. N.22°E., 71 lks.  
 dist., mkd.  $\frac{1}{4}$  S 11 WC BT  
 a yellow pine, 6 ins. in diam., brs. S.25°E., 29 lks.  
 dist., mkd.  $\frac{1}{4}$  S 14 WC BT

- Asc. 245 ft. over NE slope.  
 52.60 Desc. 44 ft. over SW slope.  
 55.00 Wash, 10 lks. wide, course N.  
 58.80 Spur, slopes NW.  
 Desc. 316 ft. over SW slope, to wash.  
 59.00 Trail, brs. NW-SE.  
 71.30 Wash, 10 lks. wide, course NW.  
 Asc. 60 ft. over NE slope to  
 79.62 The cor. secs. 10, 11, 14 and 15.
- Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, oak, juniper and yellow pine.  
 Undergrowth, scruboak, manzanita, cactclaw, mahogany & cacti.

- North, on true line, on Sectional Guide Meridian, bet. secs 10 and 11.  
 Over mountainous land, thru heavy timber and dense undergrowth.  
 Desc. 90 ft. over NE slope.  
 5.80 Wash, 10 lks. wide, 4 ft. deep, course NW.  
 Asc. 51 ft. over SW slope.  
 10.50 Spur, slopes W.  
 11.00 Trail, brs. E-W.  
 Desc. 125 ft. over N. slope.  
 19.60 Wash, in bottom of Glance Canyon, 10 lks. wide, 2 ft. deep, with small stream of running water, course SW.  
 Asc. 90 ft. over SE slope.  
 21.00 Old road, brs. NE-SW.  
 31.20 Spur, slopes SE.

Chains


40.00 Asc. 20 ft. over gradual E. slope to  
Set an iron post 3 ft. long, 1 in. in diam., 6 ins. in  
the ground to bedrock, supported by a md. stone, for  
the cor. of secs. 10 and 11, with brass cap mkd.,



1927

from which,  
an oak, 8 ins. in diam., brs. N.86 1/2° E., 30 lks.  
dist., mkd. 1/4 S11 BT  
a juniper, 18 ins. in diam., brs. N.56 1/2° W., 79 lks.  
dist., mkd. 1/4 S10 BT

43.50 Thence along E. slope.  
Spur, slopes SW.  
Asc. 37 ft. along gradual W. slope.  
49.30 Desc. gradually along W. slope.  
56.00 Wash, 10 lks. wide, course SW.  
Asc. 106 ft. over S. slope.  
61.10 Trail, brs. NE-SW.  
66.50 Desc. 30 ft. over NW slope.  
68.80 Wash, 10 lks. wide, course SW.  
Asc. 30 ft. over SW slope, to cor.  
75.00 Wash, 10 lks. wide, 5 ft. deep, course SW.  
80.00 Set an iron post 3 ft. long, 2 ins. in diam., 15 ins. in  
the ground to bedrock, supported by a md. stone, for  
the cor. secs. 2, 3, 10 and 11, with brass cap mkd.




1927

from which,  
an oak, 9 ins. in diam., brs. N.44° E., 106 lks.  
dist., mkd. T23S R19E S2 BT  
a juniper, 14 ins. in diam., brs. S.82° E., 80 lks.  
dist., mkd. T23S R19E S11 BT  
an oak, 13 ins. in diam., brs. S.17 1/2° W., 59 lks.  
dist., mkd. T23S R19E S10 BT  
an oak, 20 ins. in diam., brs. N.63° W., 14 lks.  
dist., mkd. T23S R19E S3 BT

Land, mountainous.  
Soil, rocky 4th. rate.  
Timber, oak, juniper and pine.  
Undergrowth, scruboak, manzanita, catclaw and cacti.

-----  
East, on true line, bet. secs. 3 and 10.  
Over mountainous land, thru heavy timber and dense under-  
growth.

20.50 Asc. 370 ft. over SW slope.  
Intersect the boundary of the Ft. Huachuca Military Reser-  
vation on the Huachuca divide, at 56 lks. N.13° 19' W., of  
Cor. No. 53 thereof, hereinbefore described.  
At intersection set an iron post 3 ft. long, 2 ins. in diam.,  
8 ins. in the ground to bedrock, supported by a md. stone,  
for the closing cor. secs. 2 and 11, with brass cap mkd.



1927

from which,



Survey of part of the Subdivision Lines of T.23 S., R.19 E. 47


Chains

an oak, 6 ins. in diam., brs. N.56°W., 63 lks.  
dist., mkd. T23S R19E S2 CCBT  
an oak, 12 ins. in diam., brs. S.35°W., 30 lks.  
dist., mkd. T23S R19E S11 CCBT

Land, mountainous.  
Soil, rocky 4th. rate.  
Timber, oak, juniper and pine.  
Undergrowth, scruboak, manzanita, catclaw and cacti.

From cor. secs. 2, 3, 10 and 11.  
North on true line, on Sec. Guide Meridian, bet. secs. 2 and 3.  
Over mountainous land, thru heavy timber and dense undergrowth.

- 1.00 Desc. 6 ft. over N. slope.
- Wash, 10 lks. wide, course SW.
- Asc. 65 ft. over S. slope.
- 4.50 Trail, brs. NE-SW.
- 4.80 Ridge, brs. NE-SW.
- Desc. 100 ft. over N. slope.
- 9.70 Wash, 10 lks. wide, course W.
- Asc. 81 ft. over SW slope.
- 13.80 Spur, slopes W.
- Desc. 45 ft. over NW slope.
- 22.50 Wash, 10 lks. wide, course W.
- Asc. 110 ft. over SW slope.
- 27.10 Spur, slopes W.
- Desc. 110 ft. over NW slope.
- 31.00 Wash, 10 lks. wide, course W.
- Asc. 65 ft. over SW slope.
- 34.20 Spur, slopes W.
- Desc. 80 ft. over NW slope to
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the 1/4 sec. cor. secs. 2 and 3, with brass cap mkd.



1927 from which,  
a yellow pine, 24 ins. in diam., brs. N.58°E., 32 lks.  
dist., mkd. 1/4 S2 BT  
a yellow pine, 24 ins. in diam., brs. S.55 1/4°W., 48 lks.  
dist., mkd. 1/4 S3 BT

- Desc. 14 ft. over NW slope.
- 41.00 Wash, 10 lks. wide, 3 ft. deep, with small stream of running water in same, course SW.
- 42.90 Same wash, course SE.
- Asc. 35 ft. over SW slope.
- 45.00 Desc. 45 ft. over NW slope.
- 45.90 Same wash, course SW.
- Asc. 120 ft. over SE slope.
- 54.90 Trail, brs. NE-SW. (To Ft. Huachuca and Sunnyside)
- 65.00 Desc. 10 ft. over NW slope.
- 65.50 Wash, 10 lks. wide, course SE.
- Asc. 325 ft. over S. slope.
- 76.70 Trail, brs. NW-SE.
- 80.06 Appt. due East of cor. of Ts. 22 & 23 S., R. 19 E. Cor. of secs. 23, 34 & 35 re-established at this point as hereinbefore described.
- Land, mountainous.
- Soil, rocky 4th. rate.
- Timber, oak, juniper and yellow pine.
- Undergrowth, manzanita, scruboak, catclaw and cacti.

Chains

The cor. secs. 3; 4, 33 and 34 on S. Bdy. of Tp., is an iron post, 2 ins. in diam., projecting 16 ins. above ground, firmly set, properly mkd. and witnessed by four properly mkd. bearing trees, one each NE, SE, SW and NW of cor. (Established By S.E. Blout, U.S.C.E., in 1923.)

Thence,

N.0° 2'W., on true line, bet. secs. 33 and 34.

Over rolling land, thru scattering timber and undergrowth. Desc. 25 ft. over NW slope.

4.50 Wash, 20 lks. wide, 2 ft. deep, course NW. Asc. 64 ft. over SW slope.

11.00 Edge of mesa, brs. NE-SW; leave timber. Over level land.

40.00 Set an iron post 3 ft. long, 1 in. in diam.; 26 ins. in the ground for the  $\frac{1}{4}$  sec. cor. secs. 33 and 34, with brass cap mkd.

$\frac{1}{4}$

S33 | S34

1927

Raise a md. stone 3 ft. base, 1 $\frac{1}{2}$  ft. high W. of cor.

Continue on a slight ascent of S. slope.

58.50 Old road, brs. NW-SE. Enter scattering timber.

65.00 Leave mesa, brs. NW-SE; desc. gradual NE slope, to

80.00 Set an iron post 3 ft. long, 2 ins. in diam.; 24 ins. in the ground for the cor. secs. 27, 28, 33 and 34, with brass cap mkd.

T23S	R19E
S28	S27
S33	S34

1927

from which,

an oak, 12 ins. in diam., brs. N.20 $\frac{1}{2}$ °E., 122 lks.

dist., mkd. T23S R19E S27 BT

an oak, 20 ins. in diam., brs. S.44 $\frac{1}{2}$ °E., 190 lks.

dist., mkd. T23S R19E S34 BT

an oak, 14 ins. in diam., brs. S.2 $\frac{1}{2}$ °W., 230 lks.

dist., mkd. T23S R19E S33 BT

an oak, 20 ins. in diam., brs. N.31°W., 100 lks.

dist., mkd. T23S R19E S28 BT

Land, rolling. and level.

Soil, rocky 4th. rate.

Timber, oak and juniper.

Undergrowth, scruboak, manzanita, catclaw and cacti.

East, on a random line, bet. secs. 27 and 34.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.96 Fall 3 lks. S. of the cor. secs. 26, 27, 34 and 35.

Thence,

S.89°59'W., on true line, bet. secs. 27 and 34.

Over rolling land, thru scattering timber and undergrowth.

Desc. 116 ft. over SW slope.

12.25 Enter wash, from W. to SE. Continue on gradual asc. up same.

19.80 Leave wash, from NW.

Asc. 138 ft. over E. slope.

35.00 Edge of bench, brs. NW-SE, over level stony ground, to

39.98 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in

Survey of part of the Subdivision Lines of T.23 S., R.19 E. 49

Chains

the ground, for the 1/4 sec. cor. secs. 27 and 34, with brass cap mkd.

1/4 S27  
1/4 S34

1927 from which,

an oak, 12 ins. in diam., brs. N.79 1/2°E., 268 lks. dist., mkd. 1/4 S27 BT

an oak, 8 ins. in diam., brs. S.10°E., 697 lks. dist., mkd. 1/4 S34 BT

- 45.00 Leave bench, brs. NW-SE.
- Desc. 108 ft. over SW slope.
- 67.00 Wash, 30 lks. wide, course SE.
- Asc. 132 ft. over SE slope to
- 79.96 The cor. secs. 27, 28, 33 and 34.

Land, rolling and level.  
Soil, rocky 4th. rate.  
Timber, oak and juniper.  
Undergrowth, scruboak, manzanita, catclaw and cacti.

N.0° 2'W., on true line, bet. secs. 27 and 28.  
Over rolling land, thru scattering timber and undergrowth.  
Desc. 27 ft. over NE slope.

- 15.40 Wash, 20 lks. wide, 2 ft. deep, course E.
- Asc. gradual E. slope.
- 31.00 Spur, slopes E.
- Desc. gradual NE slope.
- 33.00 Shallow wash, course SE.
- Asc. gradual S. slope to
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the 1/4 sec. cor. secs. 27 and 28, with brass cap mkd.

1/4  
S28 S27

1927 from which,

an oak, 8 ins. in diam., brs. S.70°E., 78 lks. dist., mkd. 1/4 S27 BT

an oak, 6 ins. in diam., brs. S.22°W., 7 lks. dist., mkd. 1/4 S28 BT

- Asc. gradual S4 slope.
- 43.00 Spur, slopes SE.
- Desc. 34 ft. over NE slope.
- 46.00 Wash, 20 lks. wide, 2 ft. deep, course SE.
- Asc. gradual SW slope.
- 49.50 Spur, slopes SE.
- Desc. rolling NE slope.
- 68.10 Wash, 20 lks. wide, 2 ft. deep, course SE.
- Asc. gradual SW slope.
- 75.00 Spur, slopes SE.
- Desc. gradual NE slope to
- 79.50 Set an iron post 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, supported by a md. stone, for witness cor. to cor. secs. 21, 22, 27 and 28, with brass cap mkd.

Chains

W C	
T23S	R19E
S21	S22
S28	S27

1927 from which,  
 an oak, 8 ins. in diam., brs. N.8°E., 117 lks.  
 dist., mkd. T23S R19E S22 WC BT  
 an oak, 16 ins. in diam., brs. S.63°E., 78 lks.  
 dist., mkd. T23S R19E S27 WC BT  
 an oak, 24 ins. in diam., brs. S.78°W., 20 lks.  
 dist., mkd. T23S R19E S28 WC BT  
 an oak, 24 ins. in diam., brs. N.31°W., 97 lks.  
 dist., mkd. T23S R19E S21 WC BT

80.00 True point for the cor. secs. 21, 22, 27 and 28 falls in center of wash, 40 lks. wide, course SE., where it is impracticable to monument the cor.

Land, rolling.  
 Soil, rocky 4th. rate.  
 Timber, oak & juniper.  
 Undergrowth, scruboak, catclaw and cacti.

40.00 From true point for cor. of secs. 21, 22, 27 and 28, N.89°59'E., on a random line, bet. secs. 22 and 27.  
 Set temp. ¼ sec. cor.  
 79.90 Fall 9 lks. S. of the cor. secs. 22, 23, 26 and 27. Thence, S.89°55'W., on true line, bet. secs. 22 and 27. Over mountainous land, thru scattering timber and dense undergrowth.  
 25.40 Asc. 410 ft. over broken, NE slope. Ridge, Lone Mtn., bears NW-SE.  
 33.00 Desc. 393 ft. over broken SW slope to ¼ sec. cor. Bluff, facing W., on line, 100 ft. high.  
 39.95 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the ¼ sec. cor. secs. 22 and 27, with brass cap mkd.

¼	S22
	S27

1927 from which,  
 a pinion, 10 ins. in diam., brs. N.28°W., 50 lks.  
 dist., mkd. ¼ S22 BT  
 an oak, 12 ins. in diam., brs. S.42°E., 56 lks.  
 dist., mkd. ¼ S27 BT

51.40 Desc. 217 ft. over SW slope. Descent becomes more gradual.  
 52.20 Wash, 30 lks. wide, 2 ft. deep, course NW. Asc. 15 ft. over NE slope.  
 55.00 Spur, slopes N.  
 59.70 Wash, 30 lks. wide, course SW. Asc. 71 ft. over SE slope.  
 61.40 Spur, slopes S.  
 73.40 Desc. 71 ft. over SW slope. Wash, 20 lks. wide, course SW. Asc. gradual SE slope.  
 76.40 Spur, slopes S.

Survey of part of the Subdivision Lines of T.23 S., R.19 E. 51

Chains

79.90 Desc. 55 ft. over SW slope to  
True point for cor. secs. 21, 22, 27 and 28.

Land, mountainous.  
Soil, rocky 4th. rate.  
Timber, oak and juniper.  
Undergrowth, scuboak, manzanita, catclaw and sacti.

---

From true point for cor. of secs. 21, 22, 27 and 28,  
N.0° 2' W., on true line, bet. secs. 21 and 22.  
Over rolling land, thru scattering timber and dense under-  
growth.

9.00 Asc. 80 ft. over SW slope.  
12.25 Desc. 70 ft. over NW slope.  
Wash, 30 lks. wide, 2 ft. deep, course SW.  
24.00 Asc. 90 ft. over SE slope.  
29.00 Desc. 90 ft. over NE slope.  
Head of wash, course SW.  
34.00 Asc. 50 ft. over SE slope.  
Ridge, brs. NE-SW.  
38.85 Desc. 15 ft. over NW slope.  
Head of wash, course W.  
40.00 Asc. gradual SW slope to  
Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in  
the ground for the 1/4 sec. cor. secs. 21 and 22, with  
brass cap mkd.

1/4  
S21 | S22

1927

from which,  
an oak, 10 ins. in diam., brs. S.78 1/2° E., 68 lks.  
dist., mkd. 1/4 S22 BT  
an oak, 12 ins. in diam., brs. S.59 1/2° W., 29 lks.  
dist., mkd. 1/4 S21 BT

43.50 Asc. 48 ft. over SW slope.  
Spur, slopes SW.  
51.00 Desc. 117 ft. over NW slope.  
Wash, 30 lks. wide, course SW.  
74.70 Asc. 18 1/2 ft. over SW slope to spur.  
Wire fence, brs. NE-SW.  
Spur, slopes SW.  
80.00 Desc. 61 ft. over NW slope to  
Set an iron post 3 ft. long, 2 ins. in diam., 6 ins. in  
the ground to bedrock, supported by a md. stone, for  
the cor. secs. 15, 16, 21 and 22, with brass cap mkd.

T23S R19E  
S16 | S15  
S21 | S22

1927

from which,  
an oak limb, 8 ins. in diam., brs. N.25° E., 41 lks.  
dist., mkd. T23S R19E S15 BT  
an oak, 8 ins. in diam., brs. S.59° E., 5 lks.  
dist., mkd. T23S R19E S22 BT  
a juniper, 12 ins. in diam., brs. S.41 1/2° W., 63 lks.  
dist., mkd. T23S R19E S21 BT  
a juniper, 30 ins. in diam., brs. N.55° W., 25 lks.  
dist., mkd. T23S R19E S16 BT

Chains

Land, rolling.  
Soil, rocky 4th. rate.  
Timber, oak and juniper.  
Undergrowth, scruboak, catclaw, manzanita and cacti.

40.00 N.89°55'E., on a random line, bet. secs. 15 and 22.  
Set temp.  $\frac{1}{4}$  sec. cor.  
80.10 Fall 19 lks. N. of the cor. secs. 14, 15, 22 and 23.  
Thence,  
40.00 N.89°57'W., on true line, bet. secs. 15 and 22.  
Over rolling land, thru scattering timber and undergrowth.  
80.10 Desc. 42 ft. over NW slope.  
4.50 Wash, 30 lks. wide, course SW.  
Asc. 56 ft. over SE slope.  
16.30 Spur, slopes S.  
Desc. 268 ft. over SW slope.  
39.10 Same wash as at 4.50 chs., 30 lks. wide, 2 ft. deep,  
course NW.  
Asc. gradual NE slope to  
40.05 Set an iron post 3 ft. long, 1 in. in diam., 12 ins. in  
the ground to bedrock, supported by a md. stone, for  
the  $\frac{1}{4}$  sec. cor. secs. 15 and 22, with brass cap mkd.

$\frac{1}{4}$   $\frac{S15}{S22}$

1927 from which,  
a pinion, 8 ins. in diam., brs. N.75°W., 29 lks.  
dist., mkd.  $\frac{1}{4}$  S15 BT  
an oak, 14 ins. in diam., brs. S.29°W., 12 lks.  
dist., mkd.  $\frac{1}{4}$  S22 BT

42.10 Asc. 8 ft. over NE slope.  
Wire fence, brs. NE-SW.  
48.00 Ridge, bears SE-W; desc. gradually down top of same.  
61.00 Leave ridge to NW.  
Along S. slope to  
63.00 Same ridge, bears NE-SW.  
Desc. 29 ft. over NW slope.  
68.00 Head of wash, course N.  
Asc. 100 ft. over NE slope.  
73.50 Spur, slopes NW.  
Desc. 54 ft. over W. slope to cor.  
74.10 Wire fence, brs. NW-SE.  
80.10 The cor. secs. 15, 16, 21 and 22.

Land, rolling.  
Soil, rocky 4th. rate.  
Timber, oak, juniper and pinion.  
Undergrowth, scruboak, catclaw and cacti.

N.0° 2'W., on true line, bet. secs. 15 and 16.  
Over rolling land, thru scattering timber and dense under-  
growth.  
3.56 Desc. 140 ft. over NW slope.  
Wire fence, brs. NE-SW.  
4.10 Wash, 15 lks. wide, course SW.  
Asc. 20 ft. over SE slope.  
5.00 Leave rolling, across level land.  
8.78 Wire fence (around graveyard,) brs. E-W.  
9.68 Wire fence( " " )  
19.42 Intersect S end line (3-4) of bdy. of M.E.S. No (303) at 6.40 chs.

Survey of part of the Subdivision Lines of T.23 S., R.19 E. 53

Chains	<p>N.73°19'E., of cor. No.4 thereof. Thence across H.E.S.No.303.</p> <p>19.90 Wire fence, brs. N.60°E-S.60°W. 21.35 Wash, 20 lks. wide, 5 ft. deep, course SW. 25.81 Wire fence, brs. NE-SW. 27.35 Bank of Sunnyside Creek, brs. NE-SW. Across wash, with small stream of water, course SW. 28.20 Bank of Sunnyside Creek, brs. NE-SW. 31.45 Wire fence, brs. NE-SW. 32.00 Road, brs. NE-SW. Enter rolling land. Asc. 85 ft. over SE slope to cor. 32.40 Intersect line 5 of bdy of H.E.S.No.303 at 1.76 chs. N.35°21'E. of cor. No. 5 thereof. Leave H.E.S.No.303. 33.40 Wire fence, brs. NE-SW. 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for the 1/4 sec. cor. secs. 15 and 16, with brass cap mkd.</p> <p style="text-align: center;">1/4</p> <p style="text-align: center;">S16 S15</p> <p style="text-align: center;">1927</p> <p>from which, an oak, 7 ins. in diam., brs. N.28 1/4°E., 19 lks. dist., mkd. 1/4 S15 BT a juniper, 9 ins. in diam., brs. N.73°W., 26 lks. dist., mkd. 1/4 S16 BT</p> <p>Asc. 30 ft. over gradual SE slope. 50.00 Ridge, brs. N.25°E.-S.25°W. Desc. 45 ft. over gradual NW slope. 66.80 Wash, 10 lks. wide, course SW. Asc. 50 ft. over SE slope. 70.80 Spur, slopes SW. Desc. 50 ft. over NW slope to 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, supported by a md. stone, for the cor. secs. 9, 10, 15 and 16, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>T23S</td> <td>R19E</td> </tr> <tr> <td>S9</td> <td>S10</td> </tr> <tr> <td style="border-top: 1px solid black;">S16</td> <td style="border-top: 1px solid black;">S15</td> </tr> </table> <p style="text-align: right;">from which,</p> <p style="text-align: center;">1927</p> <p>an oak, 8 ins. in diam., brs. N.52 1/2°E., 72 lks. dist., mkd. T23S R19E S10 BT an oak, 12 ins. in diam., brs. S.29 1/4°E., 43 lks. dist., mkd. T23S R19E S15 BT an oak, 8 ins. in diam., brs. S.85°W., 48 lks. dist., mkd. T23S R19E S15 BT an oak, 7 ins. in diam., brs. N.35°W., 24 lks. dist., mkd. T23S R19E S9 BT</p> <p>Land, rolling and level. Soil, rocky 4th. rate. Timber, oak and juniper. Undergrowth, scruboak, catclaw and cacti.</p> <hr style="border-top: 1px dashed black;"/> <p>40.00 S.89°57'E., on a random line, bet. secs. 10 and 15. Set temp. 1/4 sec. cor. 79.92 Fall 9 lks. S. of the cor. secs. 10, 11, 14 and 15. Thence, S.89°59'W., on true line, bet. secs. 10 and 15.</p>	T23S	R19E	S9	S10	S16	S15
T23S	R19E						
S9	S10						
S16	S15						

## Chains

	Over mountainous land, thru heavy timber and dense undergrowth.
3.50	Asc. 25 ft. over NE slope. Spur, slopes NW.
13.40	Desc. 150 ft. over W. slope. Wash, 10 lks. wide, course NW.
24.40	Asc. 75 ft. over N. Slope. Spur, slopes NW.
25.14	Desc. 150 ft. over W. slope to $\frac{1}{4}$ sec. cor. From which,
39.10	a windmill, by Sunnyside P.O., brs. S.54°15'W. Road, brs. NE-SW.
39.96	Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. secs. 10 and 15, with brass cap mkd.
	$\frac{1}{4}$ $\frac{S10}{S15}$
	1927
	from which,
	a yellow pine, 10 ins. in diam., brs. N.36°E., 57 lks. dist., mkd. $\frac{1}{4}$ S10 BT
	an oak, 8 ins. in diam., brs. S.38 $\frac{1}{2}$ °W., 62 lks. dist., mkd. $\frac{1}{4}$ S15 BT
42.40	Desc. 10 ft. over W. slope. Sunnyside Creek, 20 lks. wide, 3 ft. deep, with small stream of running water, course SW.
49.90	Asc. 25 ft. over SE slope. Enter rolling land. Road on spur, (sloping S.) brs. N-S.
51.90	Desc. 10 ft. over SW slope. Wash, 15 lks. wide, course SE.
60.25	Asc. 170 ft. over E. slope, to ridge.
66.10	Wire fence, brs. N.10°E.-S.10°W. Ridge, brs. N.16°E.-S.16°W.
76.00	Desc. 175 ft. over W. slope to cor. Wash, 5 lks. wide, course SW.
79.85	Same wash, course NW.
79.92	The cor. secs. 9, 10, 15 and 16.
	Land, rolling and mountainous. Soil, rocky 3rd. & 4th. rate. Timber, oak, juniper, pinion and yellow pine. Undergrowth scruboak, manzanita, catclaw and cacti.
	N.0° 2'W., on true line, bet. secs. 9 and 10.
0.40	Over rolling land, thru heavy timber and dense undergrowth. Desc. slight NW slope to Wash, 5 lks. wide, course NW.
8.45	Asc. 50 ft. over SW slope. Desc. 30 ft. over NW slope.
10.50	Wire fence, brs. NE-SW.
11.20	Wash, 10 lks. wide, course SW. Asc. 60 ft. over SE slope.
15.90	Desc. 50 ft. over NW slope.
20.90	Wash, 10 lks. wide, course W. Asc. 100 ft. over SE slope.
27.30	Desc. 30 ft. over NW slope.
29.70	Wash, 10 lks. wide, course W. Asc. 220 ft. over SE slope to
40.00	Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. secs. 9 and 10, with brass cap mkd.



Survey of part of the Subdivision Lines of T.23 S..R.19 E. 55

Chains

1/4

S9 | S10

1927 from which,  
an oak, 14 ins. in diam., brs. N.82°W., 23 lks.  
dist., mkd. 1/4 S9 BT  
an oak, 10 ins. in diam., brs. S.64 1/2°E., 64 lks.  
dist., mkd. 1/4 S10 BT

- 41.00 Asc. 8 ft. over SE slope.
- 41.00 Top of small round knoll. Enter mtns. land.
- 47.80 Desc. 340 ft. over steep N. slope.
- 47.80 Wash, 15 lks. wide, with small stream of running water,  
course NW.
- 48.80 Asc. 450 ft. over SW slope to cor.
- 48.80 Trail, brs. E-W.
- 62.00 Wash, 5 lks. wide, course SW.
- 75.30 Wash, 5 lks. wide, course SW.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in  
the ground for the cor. secs. 3, 4, 9 and 10, with  
brass cap mkd.

T23S	R19E
S4	S3
S9	S10

1927 from which,  
a juniper, 12 ins. in diam., brs. N.36 1/4°E., 31 lks.  
dist., mkd. T23S R19E S3 BT  
a juniper, 24 ins. in diam., brs. S.47 1/4°E., 82 lks.  
dist., mkd. T23S R19E S10 BT  
a juniper, 8 ins. in diam., brs. S.18°W., 47 lks.  
dist., mkd. T23S R19E S9 BT  
an oak, 13 ins. in diam., brs. N.73°W., 46 lks.  
dist., mkd. T23S R19E S4 BT

Land, rolling and mountainous.  
Soil, rocky 4th. rate.  
Timber, oak, pinion and juniper.  
Undergrowth, scruboak, catclaw and catti.

- 
- 40.00 N.89°59'E., on a random line, bet. secs. 3 and 10.
  - 40.00 Set temp. 1/4 sec. cor.
  - 79.92 Fall 20 lks. N. of the cor. secs. 2, 3, 10 and 11.
  - 79.92 Thence,
  - 79.92 N.89°52'W., on true line, bet. secs. 3 and 10.
  - 79.92 Over mountainous land, thru heavy timber and dense under-  
growth.
  - 0.70 Desc. 10 ft. over NW slope.
  - 0.70 Wash, 10 lks. wide, course SW.
  - 9.26 Asc. 70 ft. over SE slope.
  - 9.26 U.S.L.M. No.4027 brs. N.33°33'W.,  
Ridge, brs. N.70°E.-S.70°W.
  - 9.40 Desc. 230 ft. over NW slope to wash.
  - 9.40 Trail, brs. NE-SW.
  - 12.55 Trail, brs. NW-SE.
  - 24.22 Intersect the E. side line (1-6)H&E.S.No.300.at.19.29'chs.  
S35°14'W., of cor. No. 6 thereof.
  - 27.70 Thence across H&E.S.No.300.
  - 27.70 Wash. 10 lks. wide, 3 ft. deep, course SW. Small stream  
of water in same.
  - 27.70 Asc. 50 ft. over SE slope to 1/4 sec. cor.

Chains

33.86 Intersect the west side line (2-3) of H.E.S. No. 300 at  
 16.61 chs. S.31°29'W. of cor. No. 3 thereof. Leave H.E.S. No. 300.  
 34.60 Road, brs. N.-S.  
 39.96 Set an iron post 3 ft. long, 1 in. in diam., 6 ins. in  
 the ground to bedrock, supported by a md. stone, for the  
 1/4 sec. cor. secs. 3 and 10, with brass cap mkd.

1/4  $\frac{S\ 3}{S\ 10}$

1927 from which,  
 a juniper, 14 ins. in diam., brs. N.2°W., 66 lks.  
 dist., mkd. 1/4 S3 BT  
 an oak, 7 ins. in diam., brs. S.34 1/2°W., 23 lks.  
 dist., mkd. 1/4 S10 BT

44.40 Desc. 60 ft. over NW slope.  
 Wash, 10 lks. wide, course SE.  
 Asc. 110 ft. over NE slope.  
 51.80 Desc. 15 ft. over SW slope.  
 54.90 Wash, 10 lks. wide, course SW.  
 Asc. 300 ft. over E. slope.  
 71.10 Ridge, brs. NW-SE.  
 Desc. 125 ft. over SW slope to  
 79.92 The cor. secs. 3, 4, 9 and 10.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, oak, birch, juniper and yellow pine.  
 Undergrowth, scruboak, manzanita, catclaw and cacti.

40.00 N.0° 2'W., on random line, bet. secs. 3 and 4.  
 Set temp. 1/4 sec. cor.  
 79.90 Fall 5 lks. W. of the cor. secs. 3, 4, 33 and 34 on N. Bdy.,  
 hereinbefore described.

Thence,  
 South, on true line bet. secs. 3 and 4.  
 Over mountainous land, thru heavy timber and dense under-  
 growth.

15.00 Desc. 245 ft. over S. slope.  
 Wash, 10 lks. wide, course S.20°E.  
 Asc. 10 ft. over NE slope.  
 16.60 Desc. 40 ft. over SW slope.  
 24.50 Wash, 10 lks. wide, course SW.  
 Asc. 25 ft. over NW slope.  
 26.40 Desc. 30 ft. over SW slope.  
 27.40 Wash, 10 lks. wide, course W.  
 Asc. 380 ft. over NW slope to

(16.61 chs. S.31°29'W. of cor. No. 3, sec. 3, 4, 9 and 10.)

39.90 Set an iron post 3 ft. long; 1 in. in diam., 18 ins. in  
 the ground to bedrock, supported by md. stone, for the  
 1/4 sec. cor. secs. 3 and 4, with brass cap mkd.

1/4  
 S4 S3

1927 from which.  
 a yellow pine, 12 ins. in diam., brs. N.27 1/2°E., 74 lks.  
 dist., mkd. 1/4 S3 BT  
 an oak, 8 ins. in diam., brs. N.71°W., 88 lks.  
 dist., mkd. 1/4 S4 BT

Survey of part of the Subdivision Lines of T. 23 S., R. 19 E. 57

Chains

- 44.85 Desc. 275 ft. over SW slope.
- 51.80 Trail, brs. NW-SE.
- 61.40 Wash, 10 lks. wide, course SE.
- 68.75 Asc. 190 ft. over NE slope.
- 73.80 Ridge, brs. N.30°W.-S.30°E.
- 75.40 Desc. 72 ft. over S. slope.
- 79.90 Wash, 10 lks. wide, course SW.
- Asc. 105 ft. over NW slope.
- Spur, slopes W.
- Desc. 155 ft. over SW slope to cor.
- Prospect hole 50 lks. E. of line.
- The cor. secs. 3, 4, 9 and 10.

Land, mountainous.  
 Soil, rocky 4th. rate,  
 Timber, oak, juniper, pinion, and yellow pine.  
 Undergrowth scruboak, manzanita, catclaw and cacti.

The cor. secs. 4, 5, 32 and 33 on the S. Bdy. of Tp., as established by S. E. Blont, U.S.C.E., in 1923, is an iron post 2 ins. in diam., firmly set and projecting 14 ins. above ground, with brass cap properly mkd. and witnessed by four properly mkd. bearing trees, one each NE, SE, SW and NW of cor.

- 5.00 Thence, N.0° 2'W., on true line, bet. secs. 32 and 33. Over rolling land, thru scattering timber and undergrowth. Enter wash, 30 lks. wide, 20 ft. banks, Course S.30°E. Asc. gradually up same.
- 8.40 Leave wash to N.30°E. Continue up draw bottom.
- 11.45 Enter wash, 30 lks. wide, course S.30°E., continue up same.
- 13.30 Leave wash from N.30°E.
- 16.30 Same wash, course SE.
- 28.00 Bend in wash from NE and SE. Leave bottom; asc. 82 ft. over SE slope to
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, supported by a md. stone, for the 1/4 sec. cor. secs. 32 and 33, with brass cap mkd.

1/4  
 S32 S33

1927 from which,  
 an oak, 14 ins. in diam., brs. E, 27 lks.  
 dist., mkd. 1/4 S33 BT  
 an oak, 14 ins. in diam., brs. S.71°W., 44 lks.  
 dist., mkd. 1/4 S32 BT

- 48.00 Asc. gradual SE slope.
- 60.00 Fence, brs. NE-SW.
- 60.00 Ridge, bears NE-SW.
- 80.00 Desc. 14 ft. over gradual NW slope to
- Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for the cor. secs. 28, 29, 32 and 33, with brass cap mkd.

T23S R19E  
 S29 S28  
 S32 S33

1927 from which,  
 an oak, 8 ins. in diam., brs. N.33°E., 36 lks.  
 dist., mkd. T23S R19E S28 BT  
 an oak, 4 ins. in diam., brs. S.87 1/2°E., 67 lks.  
 dist., mkd. BT

Chains

an oak, 20 ins. in diam., brs. S.46°W., 71 lks.  
dist., mkd. T23S R19E S32 BT  
an oak, 12 ins. in diam., brs. N.73°W., 36 lks.  
dist., mkd. T23S R19E S29 BT

Land, rolling.  
Soil, rocky 4th. rate.  
Timber, oak, pinion and cedar.  
Undergrowth, scruboak, catclaw and cacti.

East, on a random line, bet. secs. 28 and 33.  
40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
80.10 Fall 7 lks. N. of the cor. secs. 27, 28, 33 and 34.  
Thence,  
N.89°57'W., on true line, bet. secs. 28 and 33.  
Over rolling land, thru scattering timber and dense under-  
growth.  
Asc. 34 ft. over E. slope.  
5.00 Edge of broad bench, brs. N-S. Continue over level, stony  
ground. Leave dense undergrowth, enter scattering same.  
14.75 Old road, brs. NW-SE.  
40.05 Set an iron post 3 ft. long, 1 in. in diam., 16 ins. in  
the ground to bedrock, supported by a md. stone, for  
the  $\frac{1}{4}$  sec. cor. secs. 28 and 33, with brass cap mkd.

$$\frac{1}{4} \frac{S28}{S33}$$

1927 from which,  
an oak, 20 ins. in diam., brs. N.80 $\frac{1}{2}$ °W., 653 lks.  
dist., mkd.  $\frac{1}{4}$  S28 BT  
an oak, 20 ins. in diam., brs. S.83°W., 1043 lks.  
dist., mkd.  $\frac{1}{4}$  S33 BT

47.50 Leave bench, brs. N-S.  
Desc. 137 ft. over NW slope.  
74.90 Wire fence, brs. N.20°W.-S.20°E.  
80.10 The cor. secs. 28, 29, 32 and 33.

Land, rolling and level.  
Soil, rocky 4th. rate.  
Timber, oak, pinion and juniper.  
Undergrowth, scruboak, catclaw and cacti.


N.0° 2'W., on true line, bet. secs. 28 and 29.  
Over rolling land, thru scattering timber and dense under-  
growth.  
Desc. 20 ft. over NW slope.  
2.50 Wash, 20 lks. wide, 2 ft. deep, course NW.  
Asc. 14 ft. over SW slope.  
5.50 Spur, slopes W.  
Desc. 34 ft. over N<sup>w</sup> slope.  
9.90 Wire fence, brs. N.20°W.-S.20°W.  
11.00 Wire fence, brs. N.40°E.-S.40°W.  
14.50 Wash, 50 lks. wide, 2 ft. deep, course SW.  
Asc. gradual SW slope.  
17.80 Wire fence, brs. NW-SE.  
17.82 Intersect the S. end line (3-4) of H.E.S. No. 535 at

Survey of part of the Subdivision Lines of T.23 S., R.19 E. 59

Chains	<p>5.05 chs. S.71°13'E., of cor. No. 4 thereof.          Thence across H.E.S. No. 535 (ploughed field.)          22.00 Road, brs. NE-SW.          31.90 Intersect the W. side line (1-4) of H.E.S. No. 535 at 13.30          chs. N.21°22'E., of cor. No. 4 thereof.          Leave H.E.S. No. 535.          35.60 Wire fence, brs. NE-SW.          Leave ploughed field.          40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in          the ground for the <math>\frac{1}{4}</math> sec. cor. secs. 28 and 29, with          brass cap mkd.</p> <p style="text-align: center;"><math>\frac{1}{4}</math></p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>S29</td> <td>S28</td> </tr> </table> <p style="text-align: center;">1927</p> <p>an oak, 20 ins. in diam., brs. N.40°E., 110 lks.          dist., mkd. <math>\frac{1}{4}</math> S28 BT          an oak, 10 ins. in diam., brs. S.84°W., 35 lks.          dist., mkd. <math>\frac{1}{4}</math> S29 BT</p> <p>61.00 Asc. 43 ft. over SE slope.          Spur, slopes SE.          62.40 Desc. 52 ft. over NE slope.          Wash, 50 lks. wide, 2 ft. deep, course SE.          78.80 Asc. 64 ft. over SE slope.          Wire fence, brs. NW-SE.          79.00 Road, brs. NW-SE.          80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in          the ground for the cor. secs. 20, 21, 28 and 29, with          brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>T23S</td> <td>R19E</td> </tr> <tr> <td>S20</td> <td>S21</td> </tr> <tr> <td>S29</td> <td>S28</td> </tr> </table> <p style="text-align: center;">1927</p> <p>an oak, 10 ins. in diam., brs. N.62°E., 477 lks.          dist., mkd. T23S R19E S21 BT          an oak, 10 ins. in diam., brs. S.72½°E., 482 lks.          dist., mkd. T23S R19E S28 BT          an oak, 12 ins. in diam., brs. S.9¼°W., 437 lks.          dist., mkd. T23S R19E S29 BT          an oak, 22 ins. in diam., brs. N.65°W., 440 lks.          dist., mkd. T23S R19E S20 BT</p> <p>Land, rolling, and level.          Soil, rocky 4th. rate.          Timber, oak, pinion and juniper.          Undergrowth, scruboak, cattlaw and cacti.</p> <hr style="border-top: 1px dashed black;"/> <p>40.00 S.89°57'E., on a random line, bet. secs. 21 and 28.          Set temp. <math>\frac{1}{4}</math> sec. cor.          80.00 Fall 7 lks. S. of the cor. secs. 21, 22, 27 and 28.          Thence,          West, on true line, bet. secs. 21 and 28.          Over rolling land, thru scattering timber and dense under-          growth.          19.10 Asc. 235 ft. over E. slope.          From which.          a house brs. S.77°09'W. (on HES 535) Ridge, bears N-S.          39.50 Desc. 275 ft. over W. slope.          Wash, 5 lks. wide, course NW.</p>	S29	S28	T23S	R19E	S20	S21	S29	S28
S29	S28								
T23S	R19E								
S20	S21								
S29	S28								

Chains

40.00 Asc. 8 ft. over NE slope to  
Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, supported by a md. stone, for the  $\frac{1}{4}$  sec. cor. secs. 21 and 28, with brass cap mkd.



1927 from which,  
an oak, 12 ins. in diam., brs. N.65°W., 38 lks. dist., mkd.  $\frac{1}{4}$  S21 BT  
an oak, 14 ins. in diam., brs. S.6°W., 17 lks. dist., mkd.  $\frac{1}{4}$  S28 BT

45.00 Desc. 20 ft. over NW slope.  
Wash, 15 lks. wide, course SW.

47.00 Asc. 20 ft. over SE slope.

56.75 Desc. 45 ft. over SW slope.

Sunnyside wash, 30 lks. wide, 2 ft. deep, course S.

Over level bottom land.

58.45 Irrigation ditch, course S.

61.90 Wire fence, brs. N-S.

Leave bottom; asc. 146 ft. over E. slope.

74.62 From which,

house, brs. S.55 $\frac{1}{4}$ °E.

windmill, brs. S.60°20'E.

80.00 Thence, over level, stony land to  
The cor. secs. 20, 21, 28 and 29.

Land, rolling and level.

Soil, rocky 4th. rate, on slopes; in draw bottom, 3rd. rate, sandy.

Timber, oak and juniper.

Undergrowth, scruboak, catclaw and cacti.

N.0° 2'W., on true line, bet. secs. 20 and 21.

Over rolling land, thru scattering timber and undergrowth.

Asc. gradual SE slope of broad ridge.

5.00 Road, brs. NE-SW.

6.50 Top of ascent; desc. 30 ft. over NW slope.

14.00 Wash. 10 lks. wide, course SW.

Asc. 100 ft. over SW slope.


23.20 Road, brs. NW-SE.

33.30 Spur, slopes W.

Desc. 40 ft. over NW slope.

34.80 Road, brs. NE-SW.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, supported by a md. stone, for the  $\frac{1}{4}$  sec. cor. secs. 20 and 21, with brass cap mkd.



1927 from which,  
an oak, 15 ins. in diam., brs. S.60 $\frac{1}{4}$ °E., 73 lks. dist., mkd.  $\frac{1}{4}$  S21 BT  
an oak, 12 ins. in diam., brs. S.13°W., 29 lks. dist., mkd.  $\frac{1}{4}$  S20 BT

Desc. 200 ft. over NW slope.

Survey of part of the Subdivision Lines of T.23 S., R.19 E. 61

Chains  
 53.76 Intersect line 3-4 of the boundary of H.E.S. 536 at 2.65  
 chs. N.34°E. of cor. No. 4.  
 Thence across H.E.S. No. 536.  
 54.50 Foot of descent; enter small valley.  
 54.98 Wire fence, brs. NE-SW.  
 59.10 S. bank of wash, with stream of water coursing SW.  
 59.90 N. bank of wash.  
 64.38 Wire fence, brs. NE-SW.  
 Leave valley; asc. 75 ft. over S. slope.  
 65.45 Trail, brs. NE-SW.  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in  
 the ground to bedrock, supported by a md. stone, for  
 the cor. secs. 16, 17, 20 and 21, with brass cap mkd.

T23S	R19E
S17	S16
S20	S21

1927 from which,  
 an oak, 9 ins. in diam., brs. N.70½°E., 116 lks.  
 dist., mkd. T23S R19E S16 BT  
 an oak, 6 ins. in diam., brs. S.76½°E., 26 lks.  
 dist., mkd. T23S R19E S21 BT  
 an oak, 10 ins. in diam., brs. S.44¼°W., 90 lks.  
 dist., mkd. T23S R19E S20 BT  
 an oak, 6 ins. in diam., brs. N.58½°W., 32 lks.  
 dist., mkd. T23S R19E S17 BT

Land, rolling and level.  
 Soil, rocky 3rd. and 4th. rate.  
 Timber, oak and juniper.  
 Undergrowth, scruboak, catclaw and cacti.

40.00 East, on random line, bet. secs. 16 and 21.  
 Set temp. ¼ sec. cor.  
 80.14 Fall 9 lks. N. of the cor. secs. 15, 16, 21 and 22.  
 Thence,  
 N.89°56'W., on true line, bet. secs. 16 and 21.  
 Over rolling land, thru scattering timber and dense under-  
 growth.  
 Desc. 159 ft. over NW slope.  
 11.90 E. bank of Sunnyside wash, 2 ft. banks., course SW.  
 12.60 W. bank of Sunnyside wash,  
 Asc. 75 ft. over gradual SE slope to  
 40.07 Set an iron post 3 ft. long., 1 in. in diam., 26 ins. in  
 the ground for the ¼ sec. cor. secs. 16 and 21, with  
 brass cap mkd.

S16
¼
S21

1927 from which,  
 an oak, 10 ins. in diam., brs. N.31°E., 38 lks.  
 dist., mkd. ¼ S16 BT  
 an oak, 10 ins. in diam., brs. S.51½°E., 77 lks.  
 dist., mkd. ¼ S21 BT

40.65 Asc. 15 ft. over gradual SE slope.  
 Road, brs. NE-SW.  
 48.00 Ridge, brs. NE-SW.  
 Desc. gradual NW slope., 220 ft.

Chains.

- 61.00 Ft. of slope; enter small valley. Leave dense undergrowth
- 62.43 Intersect line 3-4 of the bdy. of H.E.S. No. 536 at 9.01 chs.  
S. 34° W., of cor. No. 3 thereof.  
Thence across H.E.S. No. 536.
- 64.30 Wire fence, brs. NW-SE.
- 65.36 Wire fence, brs. NE-SW.
- 66.00 E. bank of wash, 4 ft. deep., course SW.
- 66.70 W. bank of wash.
- 67.50 Wire fence, brs. N-S. Enter field.
- 73.30 Wire fence, brs. NE-SW.  
Leave field.
- 73.40 Trail, brs. NE-SW. Enter scattering undergrowth.  
Leave valley asc. 70 ft. over SE slope, to
- 80.14 The cor. secs. 16, 17, 20 and 21.

Land, rolling and level.  
Soil, rocky 4th. rate on slopes; in valley sandy 2nd. rate.  
Timber, oak and juniper.  
Undergrowth, scruboak, catclaw and cacti.

- N. 0° 2' W., on true line, bet. secs. 16 and 17.  
Over rolling land, thru scattering timber and undergrowth.  
Asc. 80 ft. over gradual S. slope. Across H.E.S. No. 536.
- 7.13 Wire fence, brs. E-W.
- 7.34 Intersect line 2-3 of the boundary of H.E.S. No. 536 at 85  
lks. N. 89° 48' E., of cor. No. 2.  
Leave H.E.S. No. 536.
- 25.06 Fence, brs. NW-SE.  
Desc. 40. ft. over NW slope.
- 38.20 Wash, 10 lks. wide, course SW.  
Asc. 60 ft. over S. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in  
the ground to bedrock, supported by a md. stone, for  
the  $\frac{1}{4}$  sec. cor. secs. 16 and 17, with brass cap mkd.

$\frac{1}{4}$

S17 S16

1927 from which,  
an oak, .12 ins. in diam., brs. N. 86° W., 123 lks.  
dist., mkd.  $\frac{1}{4}$  S17 BT.  
an oak, 11 ins. in diam., brs. S. 76 $\frac{1}{2}$ ° E., 97 lks.  
dist., mkd.  $\frac{1}{4}$  S16 BT

- Asc. 58 ft. over S. slope.
- 47.00 Desc. 120 ft. over NW slope.
- 65.30 Wash, 10 lks. wide, course SW.  
Asc. 75 ft. over SE slope.
- 71.50 Ridge, brs. NE-SW.  
Desc. 150 ft. over NW slope to
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 12 ins. in  
the ground to bedrock, supported by a md. stone for the  
cor. secs. 8, 9, 16 and 17, with brass cap mkd.

T23S R19E  
88 | 89

S17 | S16

1927 from which,



Survey of part of the Subdivision Lines of T.23 S., R.19 E. 63

Chains

an oak, 6 ins. in diam., brs. N.41°E., 22 lks.  
 dist., mkd. T23S R19E S9 BT  
 a juniper, 7 ins. in diam., brs. S.18°E., 19 lks.  
 dist., mkd. T23S R19E S16 BT  
 a yellow pine, 10 ins. in diam., brs. S.40°W., 24 lks.  
 dist., mkd. T23S R19E S17 BT  
 a juniper, 12 ins. in diam., brs. N.29°W., 8 lks.  
 dist., mkd. T23S R19E S8 BT

Land, rolling.  
 Soil, rocky 4th. rate.  
 Timber, oak, juniper and yellow pine.  
 Undergrowth, scruboak, catclaw and cacti.

S.89°56'E., on random line, bet. secs. 9 and 16.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.10 Fall 2 lks. N. of the cor. secs. 9, 10, 15 and 16.  
 Thence,  
 N.89°55'W., on true line, bet. secs. 9 and 16.  
 Over rolling land, thru scattering timber and dense under-  
 growth.  
 Asc. 10 ft. over NE slope.  
 2.00 Desc. 30 ft. over NW slope.  
 2.95 Wire fence, brs. N-S.  
 6.00 Wash, 10 lks. wide, course NW.  
 Asc. 35 ft. over NE slope.  
 9.40 Desc. 95 ft. over gradual NW slope.  
 26.35 E. bank of creek, 5 ft. deep., course S.  
 27.00 W. bank of creek; asc. 50 ft. over E. slope.  
 32.00 Spur, slopes SE.  
 Desc. 25 ft. over SW slope to  
 40.05 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground for the  $\frac{1}{4}$  sec. cor. secs. 9 and 16, with  
 brass cap mkd.

$$\frac{1}{4} \frac{S9}{S16}$$

1927 from which,  
 a juniper, 14 ins. in diam., brs. N.27°W., 37 lks.  
 dist., mkd.  $\frac{1}{4}$  S9 BT  
 an oak, 12 ins. in diam., brs. S.25°W., 32 lks.  
 dist., mkd.  $\frac{1}{4}$  S16 BT

Desc. 30 ft. over SW slope.  
 43.10 Wash, 20 lks. wide, course SE.  
 Asc. 195 ft. over SE slope.  
 63.50 Ridge, brs. S.22°W., and N.22°E.  
 Desc. 275 ft. over NW slope to  
 80.10 The cor. secs. 8, 9, 16 and 17.

Land, rolling.  
 Soil, rocky 4th. rate.  
 Timber, oak, juniper and sycamore.  
 Undergrowth, scruboak and manzanita.

N.0° 2'W., on true line, bet. secs. 8 and 9.  
 Over mountainous land, thru scattering timber and dense  
 undergrowth.  
 Desc. 45 ft. over N. slope.  
 1.60 Wash, 10 lks. wide, course W.  
 Asc. 30 ft. over S. slope.

Chains

- 8.30 Desc. 65 ft. over NW slope.
- 12.20 Wash, 10 lks. wide, course SW.  
Asc. 110 ft. over SE slope.
- 23.00 Desc. 20 ft. over NE slope.
- 26.70 Same wash, course SE.  
Asc. 140 ft. over S. slope.
- 36.60 Spur, slopes SW.
- 40.00 Desc. 50 ft. over NW slope to  
Set an iron post 3 ft. long, 1 in. in diam., 12 ins. in  
the ground to bedrock, supported by a md. stone, for  
the  $\frac{1}{4}$  sec. cor. secs. 8 and 9, with brass cap mkd.

$\frac{1}{4}$   
S8 S9

1927 from which,  
an oak, 11 ins. in diam., brs. S.37°E., 10 lks.  
dist., mkd.  $\frac{1}{4}$  S9 BT  
an oak, 15 ins. in diam., brs. S.82°W., 33 lks.  
dist., mkd.  $\frac{1}{4}$  S8 BT

- 44.20 Desc. 35 ft. over NW slope.  
Wash, 10 lks. wide, course W.  
Asc. 10 ft. over S. slope.
- 46.00 Desc. 25 ft. over N. slope.
- 52.90 Wash, 10 lks. wide, course SW.  
Asc. 270 ft. over S. slope.
- 73.80 Spur, slopes SW.
- 80.00 Desc. 130 ft. over NE slope to  
Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in  
the ground for the cor. secs. 4, 5, 8 and 9, with brass  
cap mkd.

T23S R19E  
S5 S4  
-----  
S8 S9

1927 from which,  
a juniper, 12 ins. in diam., brs. N.24°E., 69 lks.  
dist., mkd. T23S R19E S4 BT  
an oak, 14 ins. in diam., brs. S.86°E., 13 lks.  
dist., mkd. T23S R19E S9 BT  
an oak, 14 ins. in diam., brs. S.72 $\frac{1}{2}$ °W., 72 lks.  
dist., mkd. T23S R19E S8 BT  
an oak, 12 ins. in diam., brs. N.80°W., 61 lks.  
dist., mkd. T23S R19E S5 BT

Land, mountainous.  
Soil, rocky 4th. rate.  
Timber, oak, juniper and yellow pine.  
Undergrowth, scruboak and manzanita.

- 40.00 S.89°55'E., on random line, bet. secs. 4 and 9.  
Set temp.  $\frac{1}{4}$  sec. cor.
- 80.04 Fall 12 lks. S. of the cor. secs. 3, 4, 9 and 10.  
Thence,  
West, on true line, bet. secs. 4 and 9.  
Over mountainous land, thru heavy timber and dense under-  
growth.  
Desc. 340 ft. over SW slope.

Survey of part of the Subdivision Lines of T.23 S., R.19 E. 65

Chains

23.00 Wash, 10 lks. wide, course SE.  
 Asc. 290 ft. over NE slope.  
 36.00 Ridge, brs. NE-SW.  
 Desc. 30 ft. over NW slope to  
 40.02 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the  
 ground for the  $\frac{1}{4}$  sec. cor. secs. 4 and 9, with brass cap  
 mkd.

$\frac{1}{4}$   $\frac{S\ 4}{SS\ 9}$

1927 . . . . . from which,  
 an oak, 12 ins. in diam., brs. N.1 $\frac{1}{2}$ °E., 51 lks.  
 dist., mkd.  $\frac{1}{4}$  S4 BT  
 an oak, 8 ins. in diam., brs. S.9 $\frac{1}{2}$ °E., 20 lks.  
 dist., mkd.  $\frac{1}{4}$  S9 BT

Desc. 335 ft. over W. slope.  
 51.70 Wash, 10 lks. wide, course SW.  
 Asc. 12 ft. over gradual S. slope.  
 54.00 Desc. gradually 75 ft. over S. slope.  
 72.20 Wash, 10 lks. wide, course SE.  
 Asc. 40 ft. over NE slope.  
 77.00 Ridge, brs. NE-SW. Desc. 15 ft. over NW slope to  
 80.04 The cor. secs. 4, 5, 8 and 9.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, oak, juniper and yellow pine.  
 Undergrowth, scruboak, catclaw and cacti.

40.00 N.0° 2'W., on random line, bet. secs. 4 and 5.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.89 Fall 5 lks. W. of the cor. secs. 4, 5, 32 and 33 on N. Bdy.  
 of Tp., hereinbefore described.  
 Thence,  
 South, on true line, bet. secs. 4 and 5.  
 Over mountainous land, thru heavy timber and dense under-  
 growth.  
 Asc. 140 ft. over NE slope.  
 3.30 Trail, brs. NW-SE. (From Sunnyside-Canille.)  
 12.60 Divide, brs. N.60°W.- S.60°W.  
 Desc. gradual SW slope.  
 14.90 Head of wash, course W.  
 Asc. 46 ft. over NW slope.  
 20.90 Ridge, brs. NE-SW.  
 Desc. 185 ft. over S. slope.  
 39.20 Wash, 5 lks. wide, course SW.  
 Asc. 25 ft. over N<sup>w</sup> slope, to  
 39.89 (40.00 chs. Northing from cor. secs. 4, 5, 8 and 9.) Set  
 an iron post 3 ft. long, 1 in. in diam., 18 ins. in the  
 ground to bedrock, supported by a md. stone, for the  
 $\frac{1}{4}$  sec. cor. secs. 4 and 5, with brass cap mkd.

$\frac{1}{4}$   
 S5      S4  
 1927 . . . . . from which,

Chains

a juniper, 6 ins. in diam., brs. N.82 $\frac{1}{2}$ °W., 24 lks.  
 dist., mkd.  $\frac{1}{4}$  S5 BT  
 an oak, 10 ins. in diam., brs. S.89°E., 54 lks.  
 dist., mkd.  $\frac{1}{4}$  S4 BT

45.40 Asc. 96 ft. over N. slope.  
 Ridge, brs. NE-SW.  
 Desc. 160 ft. over S. slope.  
 61.10 Wash, 10 lks. wide, course SW.  
 Asc. 90 ft. over NW slope.  
 70.00 Desc. 45 ft. over SW slope.  
 77.10 Wash, 10 lks. wide, course W.  
 Asc. 55 ft. over N. slope to  
 79.89 The cor. secs. 4, 5, 8 and 9.

Land, mountainous..  
 Soil, rocky 4th. rate.  
 Timber, oak, juniper and pine.  
 Undergrowth, manzanita, scruboak and cacti.

The cor. secs. 5, 6, 31 and 32, on S. Bdy. of Tp., established by S.E. Blout, U.S.C.E., 1923, is an iron post, 2 fns. in diam., firmly set and projecting 20 ins. above ground, with brass cap properly mkd. and witnessed by four properly mkd. bearing trees, one each NE, SE, SW and NW of cor.

Thence,  
 N.0° 3'W., on true line, bet. secs. 31 and 32.  
 Over rolling land, thru scattering timber and undergrowth.  
 Over level, stony land.

29.00 Road, Sunnyside-Parker Canyon, brs. NE-SW.  
 38.50 Leave level land, desc. 15 ft. over NW slope to  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, supported by a md. stone, for the  $\frac{1}{4}$  sec. cor., with brass cap mkd.

 $\frac{1}{4}$ 

S31 S32

1927

from which,  
 an oak, 18 ins. in diam., brs. N.85°E., 11 lks.  
 dist., mkd.  $\frac{1}{4}$  S32 BT  
 an oak, 20 ins. in diam., brs. S.85°W., 102 lks.  
 dist., mkd.  $\frac{1}{4}$  S31 BT

41.30 Desc. 35 ft. over NW slope.  
 Wash, 20 lks. wide, 3 ft. deep, course SW.  
 Asc. 29 ft. over S. slope.  
 45.00 Spur, slopes SW.  
 Desc. gradual NW slope.  
 52.10 Wash, near hd. 10 lks. wide, course SW.  
 Asc. 23 ft. over SW slope.  
 55.50 Ridge, brs. NE-SW. (level on top for about 5 chs.)  
 Old road, brs. NE-SW.  
 60.75 Leave ridge, desc. 103 ft. over NW slope.  
 A large md. stone brs. E. about 50 lks. dist.  
 72.30 Wash, 20 lks. wide, 2 ft. deep, course NW.  
 Asc. gradual SW slope.  
 76.00 Spur, slopes W.  
 Desc. 54 ft. over NW slope to

Survey of part of the Subdivision Lines of T.23 S., R.19 E. 67

Chains

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for the cor. secs. 29, 30, 31 and 32, with brass cap mkd.

T23S R19E	
S30	S29
S31	S32

1927 from which,  
 an oak, 12 ins. in diam., brs. N.19°E., 82 lks.  
 dist., mkd. T23S R19E S29 BT  
 an oak, 18 ins. in diam., brs. S.33\*°E., 102 lks.  
 dist., mkd. T23S R19E S32 BT  
 an oak, 18 ins. in diam., brs. S.54°W., 121 lks.  
 dist., mkd. T23S R19E S31 BT  
 an oak, 14 ins. in diam., brs. N.38\*°W., 131 lks.  
 dist., mkd. T23S R19E S30 BT

Land, rolling and level.  
 Soil, rocky 4th. rate.  
 Timber, oak and juniper.  
 Undergrowth, scruboak, catclaw and cacti.

40.00 East. on random line, bet. secs. 29 and 32.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.90 Fall 9 lks. N. of the cor. secs. 28, 29, 32 and 33.  
 Thence,  
 . N.89°56'W., on true line, bet. secs. 29 and 32.  
 Over rolling land, thru scattering timber and undergrowth.  
 Desc. 29 ft. over W. slope.  
 5.00 Enter level bottom land, brs. NE-SW.  
 7.00 Center of wash, 50 lks. wide, course S.  
 11.40 Road, brs. N-S.  
 12.00 Leave bottom land, asc. 144 ft. over E. slope.  
 22.00 Over level, stony land.  
 39.95 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the  $\frac{1}{4}$  sec. cor. secs. 29 and 32, with brass cap mkd.

$\frac{1}{4}$	S29
	S32

1927 from which,  
 an oak, 12 ins. in diam., brs. N.58°W., 83 $\frac{1}{2}$  lks.  
 dist., mkd.  $\frac{1}{4}$  S29 BT  
 No other tree available; raise a md. stone 3 ft. base,  
 1 $\frac{1}{2}$  ft. high N. of cor.

Desc. 216 ft. over W. slope.  
 43.20 Wire fence, brs. N.5°E.-S.5°W.  
 43.50 Road, brs. N.5°E.-S.5°W.  
 47.20 Old road, brs. NE-SW.  
 55.00 Leave level; enter rolling land, brs. NE-SW.  
 Desc. 216 ft. over NW slope.  
 79.50 Foot of desc. across bottom land, to  
 79.90 The cor. secs. 29, 30, 31 and 32.

Land, rolling and level.  
 Soil, rocky 4th. rate; in draw bottoms, sandy 3rd. rate.  
 Timber, oak and juniper.  
 Undergrowth, scruboak, catclaw and cacti.

Chains  
 40.00 West, on a random line, bet. secs. 30 and 31.  
 80.60 Set temp.  $\frac{1}{4}$  sec. cor.  
 Fall 14 lks. N. of the cor. secs. 30 and 31 on the W. Bdy.  
 of Tp., hereinbefore described.  
 Thence,  
 N.  $89^{\circ}54'$  E., on true line, bet. secs. 30 and 31.  
 Over rolling land, thru scattering timber and undergrowth.  
 Desc. 95 ft. over SE slope.  
 12.65 Wash, 50 lks. wide, 2 ft. deep, course SW.  
 Asc. 99 ft. over SW slope.  
 24.00 Spur, slopes SW.  
 Desc. 34 ft. over SE slope.  
 31.00 Wash, 30 lks. wide, 2 ft. deep, course S.  
 Asc. 34 ft. over SW slope.  
 36.00 Spur, slopes S.  
 Desc. 46 ft. over SE slope to  
 40.60 (40.00 chs. in westing from cor. secs. 29, 30, 31 and 32)  
 Set an iron post  $\frac{3}{4}$  ft. long, 1 in. in diam., 26 ins. in  
 the ground for the  $\frac{1}{4}$  sec. cor. secs. 30 and 31, with  
 brass cap mkd.

$\frac{1}{4}$  S30  
 S31

1927 from which,  
 an oak, 6 ins. in diam., brs. N.  $41^{\circ}$  W., 11 lks.  
 dist., mkd.  $\frac{1}{4}$  S30 BT  
 an oak, 8 ins. in diam., brs. S.  $84\frac{1}{2}^{\circ}$  W., 36 lks.  
 dist., mkd.  $\frac{1}{4}$  S31 BT

42.90 Desc. 37 ft. over SE slope.  
 Wash, 20 lks. wide, 2 ft. deep, course S.  
 Asc. 34 ft. over SW slope.  
 43.50 Spur, slopes S.  
 Desc. 30 ft. over SE slope.  
 51.20 Wash, 20 lks. wide, 2 ft. deep, course S.  
 Asc. 31 ft. over SW slope.  
 53.00 Spur, slopes S.  
 Desc. 31 ft. over SE slope.  
 66.00 Enter bottom land, brs. N-S. Across level.  
 72.60 Center of Bodie Wash, 100 lks. wide, course S.  
 76.00 Leave bottom land, brs. NE-SW; asc. 34 ft. over SW slope.  
 78.50 Spur, slopes NW.  
 Desc. 12 ft. over NE slope to  
 80.60 The cor. secs. 29, 30, 31 and 32.

Land, rolling and level.  
 Soil, rocky 4th. rate, on slopes; in bottom, sandy 3rd.  
 rate.  
 Timber, oak and juniper.  
 Undergrowth, scruboak, catclaw and cacti.

N.  $0^{\circ}$   $3'$  W., on true line, bet. secs. 29 and 30.  
 Over rolling land, thru scattering timber and undergrowth.  
 Desc. gradual NW slope.  
 .30 Wash, 20 lks. wide, course NW.  
 Continue over level land.  
 4.85 Wash, 20 lks. wide, course SW.  
 Asc. 55 ft. over SE slope.  
 8.20 Spur, slopes SW.  
 Desc. 52 ft. over NW slope.  
 11.70 Foot of descent; over level east edge of draw bottom.  
 13.00 Leave bottom; asc. 45 ft. over SW slope.

Survey of part of the Subdivision Lines of T.23 S., R.19 E. 69

Chains

18.00 Thence over rolling W. slope.  
 23.00 Desc. 56 ft. over NW slope.  
 24.55 Wash, 50 lks. wide, course SW.  
 Thence over level bottom land.  
 31.30 Wash, 30 lks. wide, course S.25°E.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground for the  $\frac{1}{4}$  sec. cor. secs. 29 and 30, with  
 brass cap mkd.

$\frac{1}{4}$

S30 S29

1927 from which,  
 an oak, 26 ins. in diam., brs. N.89°E., 59 lks.  
 dist., mkd.  $\frac{1}{4}$  S29 BT  
 an oak, 6 ins. in diam., brs. N.21 $\frac{1}{2}$ °W., 37 lks.  
 dist., mkd.  $\frac{1}{4}$  S30 BT

40.30 Leave bottom; asc. 19 ft. over SE slope.  
 41.00 Thence over level, stony benchland.  
 60.00 Leave bench, brs. NW-SE.  
 Desc. 18 ft. over NE slope.  
 66.35 Wash, 20 lks, wide, 2 ft. deep, course SE.  
 Asc. 58 ft. over SW slope to cor.  
 72.00 Road, brs. NW-SE.  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in  
 the ground to bedrock, supported by amd. stone, for the  
 cor. secs. 19, 20, 29 and 30, with brass cap mkd.

T23S R19E  
 S19 S20  
 -----  
 S30 S29

1927 from which,  
 an oak, 8 ins. in diam., brs. N.61°E., 74 lks.  
 dist., mkd. T23S R19E S20 BT  
 an oak, 10 ins. in diam., brs. S.57°E., 283 lks.  
 dist., mkd. T23S R19E S29 BT  
 an oak, 6 ins. in diam., brs. S.27°W., 86 lks.  
 dist., mkd. T23S R19E S30 BT  
 an oak, 10 ins. in diam., brs. N.65°W., 80 lks.  
 dist., mkd. T23S R19E S19 BT

Land, rolling and level.  
 Soil, rocky 4th. rate on slopes; & benches; in bottomland,  
 sandy 3rd. rate.  
 Timber, oak and juniper.  
 Undergrowth, scruboak, catclaw and sacti.

40.00 S.89°56'E., on a random line, bet. secs. 20 and 29.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.02 Fall 14 lks. S. of the cor. secs. 20, 21, 28 and 29.  
 Thence  
 S.89°58'W., on true line, bet. secs. 20 and 29.  
 Over rolling land, thru scattering timber and undergrowth.  
 Over level, stony benchland.  
 2.30 Road, brs. NW-SE.  
 2.80 Wire fence, brs. NW-SE.  
 4.45 Wire fence, brs. NE-SW.  
 4.75 Road, brs. NE-SW.  
 5.00 Leave level, desc. 118 ft. over NW slope.

70 Survey of part of the Subdivision Lines of T.23 S., R.19 E.

Chains	
14.00	Wash, 20 lks. wide, course SW. Asc. 75 ft. over SE slope.
24.00	Spur, slopes SW.
40.01	Desc. 143 ft. over NW slope, to Set an iron post 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, supported by a md. stone, for the $\frac{1}{4}$ sec. cor. secs. 20 and 29, with brass cap mkd.
	$\frac{1}{4} \begin{array}{l} S 20 \\ S 29 \end{array}$
	<p style="text-align: center;">1927</p> <p style="text-align: right;">from which,</p> <p>an oak, 6 ins. in diam., brs. N.5°E., 27 lks. dist., mkd. <math>\frac{1}{4}</math> S20 BT</p> <p>an oak, 10 ins. in diam., brs. S.78°E., 33 lks. dist., mkd. <math>\frac{1}{4}</math> S29 BT</p>
42.00	Desc. 20 ft. over NW slope.
	Wash, 30 lks. wide, course SW.
	Asc. 40 ft. over SE slope.
47.00	Spur, slopes SW. Desc. 58 ft. over NW slope.
51.00	Foot of slope, across bottom land.
55.70	Road, brs. N-S.
60.20	Wash, 50 lks. wide, course S.
	Leave bottom; asc. 91 ft. over E. slope.
68.00	Spur, slopes S.
	Desc. 40 ft. over SW slope.
74.15	Wash, 30 lks. wide, course S.
	Asc. 29 ft. over NE slope to
80.02	The cor. secs. 19, 20, 29 and 30.
	Land, rolling and level.
	Soil, rocky 4th. rate, on slopes; in bottom sandy 3rd. rate.
	Timber, oak and juniper.
	Undergrowth, scruboak, catclaw and cacti.
-----	
40.00	S. 89°54' W., on random line, bet. secs. 19 and 30.
80.53	Set temp. $\frac{1}{4}$ sec. cor.
	Fall 5 lks. S. of the cor. secs. 19 and 30 on the W. Bdy. of Tp., hereinbefore described.
	Thence,
	N. 89°56' E., on true line, bet. secs. 19 and 30.
	Over rolling land, thru scattering timber and undergrowth.
	Asc. 52 ft. over NW slope.
14.00	Spur, slopes N.
	Desc. 91 ft. over NE slope.
22.65	Wash, course N., from E. Along S. edge of same.
23.65	Leave wash from NE. Over level land.
26.85	Mouth of side wash, 20 lks. wide, course NW.
	Asc. 34 ft. over NW slope.
28.50	Toe of spur, slopes N.
	Desc. 15 ft. over NE slope.
29.50	Bend in wash, from NE-NW.
	Asc. 21 ft. over NW slope.
35.50	Toe of spur, slopes N.
	Desc. 15 ft. over NE slope.
36.20	Wash, 20 lks. wide, course NW from E.
	Asc. gradually up same.
38.15	Leave wash from SE.
	Asc. 51 ft. over SW slope to



Survey of part of the Subdivision Lines of T.23 S., R.19 E. 71

Chains

40.53 (40.00 chs. westing from cor. secs. 19, 20, 29 and 30.)  
Set an iron post 3 ft. long; 1 in. in diam., 12 ins. in  
the ground to bedrock, supported by a md. stone, for  
the 1/4 sec. cor. secs. 19 and 30; with brass cap mkd.

$$\frac{1}{4} \frac{S19}{S30}$$

1927 from which,  
an oak, 8 ins. in diam., brs. N.45°W., 63 lks.  
dist., mkd. 1/4 S19 BT  
an oak, 8 ins. in diam., brs. S.45°W., 2 lks.  
dist., mkd. 1/4 S30 BT

67.50 Asc. 138 ft. over SW slope.  
Ridge, brs. NE-SW.  
Road, brs. NE-SW.  
Desc. 18 ft. over SE slope.

71.50 Head of wash, course SE.  
Asc. gradual SW slope.

75.50 Road, brs. NW-SE.

80.53 The cor. secs. 19, 20, 29 and 30.

Land, rolling and level.  
Soil, rocky 4th. rate.  
Timber, oak and juniper.  
Undergrowth, scruboak, catclaw and catti.

N.0° 3'W.; on true line, bet. secs. 19 and 20.  
Over rolling land, thru scattering timber and undergrowth.  
Desc. gradual NE slope.

3.00 Head of wash, course E.

8.20 Asc. gradual S. slope.

17.70 Spur, slopes E.  
Desc. gradual NE slope.

27.70 Head of wash, course E.  
Asc. gradual SE slope.

40.00 Leave timber, brs. E-W. Across open.

Set an iron post 3 ft. long, 1 in. in diam., 14 ins. in the  
ground to bedrock, supported by a md. stone, for the  
1/4 sec. cor. secs. 19 and 20, with brass cap mkd.

$$\frac{1}{4} \frac{S19}{S20}$$

1927 from which,  
an oak, 8 ins. in diam., brs. N.34°E., 371 lks.  
dist., mkd. 1/4 S20 BT  
a juniper, 6 ins. in diam., brs. S.20°W., 165 lks.  
dist., mkd. 1/4 S19 BT  
A large md. stone brs. N.13°55'E. (USGS)

43.70 Asc. gradual SE slope.  
Road, brs. NE-SW.  
Ridge, NE-SW.

49.74 Enter timber, brs. E-W.  
Asc. gradual SW slope.  
Same md. stone (USGS) brs. N.32°E.

50.00 Spur, slopes W.  
Desc. gradual NW slope.

72 Survey of part of the Subdivision Lines of T.23 S., R.19 E.

Chains

52.50 Head of wash, course SW.  
Asc. gradual SW slope.

55.70 Old road, brs. E-W.

56.50 Ridge, brs. E-W.  
Desc. 53 ft. over NW slope.

58.35 Wash, near head, course SW.  
Asc. gradual SW slope.


61.50 Spur, slopes W.  
Old road, brs. E-W.  
Desc. 132 ft. over NW slope.

66.60 Wash, 20 lks. wide, 2 ft. deep, course W.  
Asc. 31 ft. over SW slope.

72.50 Spur, slopes NW.  
Desc. 133 ft. over N. slope.

79.50 Wash, 30 lks. wide, 3 ft. deep, course SW.  
Asc. gradual SW slope to

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for the cor. secs. 17, 18, 19 and 20, with brass cap mkd.



1927 from which,

an oak, 16 ins. in diam., brs. N.30°E., 95 lks. dist., mkd. T23S R19E S17 BT

an oak, 8 ins. in diam., brs. S.53°E., 10 lks. dist., mkd. T23S R19E S20 BT

an oak, 10 ins. in diam., brs. S.73°W., 80 lks. dist., mkd. T23S R19E S19 BT

an oak, 14 ins. in diam., brs. N.24°W., 87 lks. dist., mkd. T23S R19E S18 BT

Land, rolling.  
Soil, rocky 4th. rate.  
Timber, oak and juniper.  
Undergrowth, scruboak, catclaw and cacti.

40.00 N. 89°58'E. on random line, bet. secs. 17 and 20.  
Set temp. 1/4 sec. cor.

79.80 Fall 12 lks. S. of the cor. secs, 16, 17, 20 and 21.  
Thence,  
S. 89°53'W., on true line, bet. secs. 17 and 20.  
Over rolling land, thru scattering timber and undergrowth.  
Desc. 52 ft. over NW slope. Across H.E.S. No. 536.

2.87 Wire fence, brs. NW-SE.

4.30 Wash, 20 lks. wide, course S.  
Asc. 108 ft. over SE slope.

7.80 Intersect line 1-2 of the boundary of H.E.S. No. 536. No. 536, at 10.05 chs., S. 43°03'W., of cor. No. 2 thereof.  
Leave H.E.S. No. 536.


14.80 Spur, slopes S.  
Desc. 114 ft. over W. slope.

28.80 Enter bottom land.

31.30 Wash, 20 lks. wide, course S.

33.60 Leave bottom land; asc. 125 ft. over SE slope, to

39.90 Set an iron post 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock, supported by a md. stone, for the 1/4 sec. cor. secs. 17 and 20, with brass cap mkd.



from which,

Survey of Part of the Subdivision Lines of T. 23 S., R. 19 E.

Chains	An oak, 20 ins. in diam., brs. N. 38° E., 88 lks. dist., mkd. $\frac{1}{4}$ S 17 B T. An oak, 24 ins. in diam., brs. S. 48° E., 200 lks. dist., mkd. $\frac{1}{4}$ S 20 B T. Asc. gradual SE. slope.
46.90	Ridge and wire fence, bear NE-SW.
47.30	Road, brs. NE-SW.
53.00	Desc. gradual SW. slope.
54.80	Wash, 20 lks. wide, 2 ft. deep, course SW. Asc. 28 ft. over SE. slope.
58.50	Spur, slopes SW. Old road, brs. NE-SW. Desc. 175 ft. over SW. slope.
70.30	Wash, 10 lks. wide, from SE. to W. Continue down same.
73.30	Leave wash, to SW. Asc. 34 ft. over SE. slope.
76.80	Desc. 43 ft. over SW. slope to
79.80	The cor. to secs. 17, 18, 19 and 20. Land, rolling. Soil, rocky, 4th rate. Timber, oak, juniper and pinion. Undergrowth, scrub oak, manzanita and cacti.
-----	
	S. 89° 56' W., on a random line, bet. secs. 18 and 19.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.66	Fall 18 lks. S. of the cor. of secs. 18 and 19 on W. Bdy., hereinbefore described. Thence S. 89° 57' E., on true line, bet. secs. 18 and 19. Over rolling land, thru scattering timber and undergrowth. Desc. 25 ft. over SE. slope.
4.55	W. side of Parker Wash, bank, 4 ft. high, brs. NE-SW.
5.00	Center of wash, course SW.
5.65	E. side of wash, 4 ft. bank. Asc. 160 ft. over W. slope.
11.65	Spur, slopes NW. Desc. 95 ft. over NE. slope.
21.15	Trail, brs. N-S.
21.44	Intersect the W. side line (3-4) of H.E.S. No. 291, at 3.50 chs. N. 10° 42' W. of cor. No. 3 thereof. Thence across H. E. S. No. 291, over level land, in small valley.
24.00	Old road, brs. N-S.
24.65	Wire fence, brs. N-S.
37.55	Wash, 10 lks. wide, course NW.
40.66	(40.00 chs. westing from cor. secs. 17, 18, 19 and 20.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. secs. 18 and 19, with brass cap marked
	$\frac{1}{4}$ S 18 S 19 1927
	from which
	An oak, 18 ins. in diam., brs. N. 53 $\frac{3}{4}$ ° W., 95 lks. dist., mkd. $\frac{1}{4}$ S 18 B T.
	An oak, 7 ins. in diam., brs. S. 80 $\frac{3}{4}$ ° E., 197 lks. dist., mkd. $\frac{1}{4}$ S 19 B T.
47.55	Wash, 10 lks. wide, 2 ft. deep, course SW.
49.79	Wire fence, brs. NW-SE. Leave valley; asc. 67 ft. over NW. slope.
51.33	Intersect the E. side line (1-2) of H.E.S. No. 291 at 5.63 chs. N. 24° 22' E., of cor. No. 2 thereof. Leave H. E. S. No. 291.
57.60	Spur, slopes SW; wire fence, brs. NE-SW. Desc. 30 ft. over SE. slope.
63.25	Wash, 10 lks. wide, course SW. Asc. 95 ft. to cor.
64.50	Same wash, course NW.
66.65	Same wash, course SW.
68.00	Same wash, course NW.

BOOK 3826

Survey of part of the Subdivision Lines of T. 23 S., R. 19 E.

- Chains
- 69.15 Same wash, course SW.
- 79.55 Same wash, course NW.
- 80.66 Asc. W. slope to  
The cor. of secs. 17, 18, 19 and 20.  
Land, rolling.  
Soil, rocky, 4th rate.  
Timber, oak and juniper.  
Undergrowth, scrub oak, catclaw and cacti.
- 
- N. 0° 5' W., on true line, bet. secs. 17 and 18.  
Over rolling land, thru scattering timber and dense undergrowth.  
Asc. 73 ft. over S. slope.
- 5.00 Spur, slopes W.  
Desc. 55 ft. over N. slope.
- 10.15 Wash, 10 lks. wide, course NW.  
Asc. 30 ft. over SW. slope.
- 13.70 Desc. 25 ft. over NW. slope.
- 14.10 Wash, 10 lks. wide, course NW. Asc. 65 ft. over gradual S. slope.
- 17.80 Wire fence, brs. NE-SW.
- 26.00 Spur, slopes SW. Desc. 120 ft. over NW. slope.
- 30.27 Wire fence, brs. NW-SE.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, supported by a md. of stone for  $\frac{1}{4}$  sec. cor. of secs. 17 and 18, with brass cap marked

$\frac{1}{4}$   
 S 18 | S 17  
 1927

from which

A juniper, 16 ins. in diam., brs. S. 78° E., 80 lks. dist., mkd.  $\frac{1}{4}$  S 17 B T.

A juniper, 10 ins. in diam., brs. S. 62° W., 27 lks. dist., mkd.  $\frac{1}{4}$  S 18 B T.

- 41.88 Desc. 20 ft. over NW. slope.  
Intersect line 1-4 of the bdy. of H. E. S. No. 290 at 6.62 chs. S. 64° 57' E., of cor. No. 1 thereof. Thence across H. E. S. No. 290
- 42.25 Center of wash (Parker Canyon) 100 lks. wide, with 4 ft. banks, course W. Thence over level land (ploughed field).
- 44.22 From which, U. S. L. M. No. 290 brs. S. 76° W., 19.89 chs.
- 45.46 Intersect line 1-2 of the bdy. of H. E. S. No. 290 at 6.04 chs. N. 82° 42' E., of cor. No. 1 thereof. Leave H. E. S. No. 290.
- 46.33 Wire fence, brs. E-W. Leave cultivated field.  
Asc. 140 ft. over S. slope.
- 65.00 Spur, slopes SW. Desc. 60 ft. over NW. slope.
- 75.50 Wash, 10 lks. wide, course SW.  
Asc. 70 ft. over S. slope to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bed rock, deposit a stone mkd. with a cross (X) at base of post, supported by a md. of stone, for cor. of secs. 7, 8, 17 and 18, with brass cap marked.

T 23 S R 19 E.  
 S 7 | S 8  
 S 18 | S 17  
 1927

from which

Survey of part of the Subdivision Lines of T.23 S., R.19 E. 75

Chains	<p>an oak, 7 ins. in diam., brs. N.23<sup>1</sup>/<sub>4</sub>°E., 53 lks.  dist., mkd. T23S R19E S8 BT  No other trees available.  Land, rolling and level.  Soil, rocky 4th. rate, on slopes; in bottomland, good sandy 2nd. rate.  Timber, oak and juniper.  Undergrowth, scruboak, catclaw and cacti.</p>
40.00	N.89°55'E., on random line, bet. secs. 8 and 17. Set temp. <sup>1</sup> / <sub>4</sub> sec. cor.
79.94	Fall 3 lks. S. of cor. secs. 8, 9, 16 and 17. Thence, S.89°52'W., on true line, bet. secs. 8 and 17. Over rolling land, thru scattering timber and undergrowth. Desc. 120 ft. over NW slope.
19.35	Wash, 10 lks. wide, course SW. Asc. 20 ft. over SE slope.
22.95	Desc. 25 ft. over NW slope.
28.75	Wash, 20 lks. wide, course SW. Asc. 70 ft. over E. slope.
36.45	Spur, slopes S.
39.97	Desc. 40 ft. over W. slope to Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the <sup>1</sup> / <sub>4</sub> sec. cor. secs. 8 and 17, with brass cap mkd.
	$\frac{1}{4} \frac{S8}{S17}$
	1927 from which,
	<p>a juniper, 7 ins. in diam., brs. N.18<sup>1</sup>/<sub>4</sub>°W., 45 lks.  dist., mkd. <sup>1</sup>/<sub>4</sub> S8 BT  an oak, 10 ins. in diam., brs. S.6°W., 60 lks.  dist., mkd. <sup>1</sup>/<sub>4</sub> S17 BT</p>
41.35	Desc. 20 ft. over W. slope. Wash, 10 lks. wide, course S.
49.45	Asc. 105 ft. over E. slope. Spur, slopes S.
58.00	Desc. 95 ft. over W. slope. Wash, 10 lks. wide, course S.
65.65	Asc. 110 ft. over E. slope.
68.25	Road, brs. NW-SE. Spur, slopes SW.
73.95	Desc. 80 ft. over NW slope. Wash, 10 lks. wide, course SW.
79.94	Asc. 50 ft. over SE slope to The cor. secs. 7, 8, 17 and 18.
	<p>Land, rolling.  Soil, rocky 4th. rate.  Timber, oak and juniper, pinion and walnut.  Undergrowth, scruboak, manzanita and cacti.</p>
40.00	N.89°57'W., on random line, bet. secs. 7 and 18. Set temp. <sup>1</sup> / <sub>4</sub> sec. cor.
80.45	Fall 2 lks. S. of the cor. secs. 7 and 18 on the W. Bdy., of Tp., hereinbefore described.

## Chains

	Thence.
	S. 89° 56' E., on true line, bet. secs. 7 and 18.
	Over rolling land, thru scattering timber and undergrowth.
	Desc. 85 ft. over NE slope.
10.10	Wash, 30 lks. wide, 2 ft. deep, course S. 20° E. (W. fork of Parker Canyon.)
	Asc. 30 ft. over SW slope.
16.00	Desc. 15 ft. over SE slope.
20.85	Old road, brs. N-S.
	Asc. 30 ft. over SW slope.
21.45	Desc. 15 ft. over SE slope.
27.15	Wash, 40 lks. wide, 3 ft. deep, course SW. (Middle fork of Parker Canyon.)
	asc. 35 ft. over NW slope.
32.45	Spur, slopes SW.
	Desc. 35 ft. over SE slope.
35.45	Wash, 10 lks. wide, course NW.
	Asc. 25 ft. over S" slope to
40.45	(40.00 chs. westing from cor. secs. 7, 8, 17 and 18.) Set an iron post 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock, supported by a md. stone, for the $\frac{1}{4}$ sec. cor. secs. 7 and 18, with brass cap mkd.
	$\frac{1}{4}$ $\frac{S7}{S18}$
	1927
	from which,
	a juniper, 12 ins. in diam., brs. N. 13° E., 71 lks. dist., mkd. $\frac{1}{4}$ S7 BT
	an oak, 6 ins. in diam., brs. S. 64° W., 92 lks. dist., mkd. $\frac{1}{4}$ S18 BT
	Desc. 15 ft. over SE slope.
43.00	Wash, 10 lks. wide, course SW.
	Asc. 55 ft. over SW slope.
47.00	Desc. 25 ft. over SE slope.
51.15	Wash, 10 lks. wide, course North.
	Asc. 90 ft. over W. slope.
61.45	Desc. 20 ft. over E. slope.
65.15	Wash, 10 lks. wide, course NW.
	Asc. 125 ft. over W. slope.
74.50	Ridge, brs. NE-SW.
	Desc. 25 ft. over SE slope to
80.45	The cor. secs. 7, 8, 17 and 18.
	Land, rolling.
	Soil, rocky 4th. rate.
	Timber, oak, juniper, sycamore, pine, walnut and ash.
	Undergrowth, oakbrush, manzanita and cacti.
	N. 0° 31' W., on true line, bet. secs. 7 and 8.
	Over rolling land, thru scattering timber and undergrowth.
	Asc. 80 ft. over S. slope.
9.00	Ridge, brs. NE-SW.
	Desc. 152 ft. over NE slope.
23.56	Trail, brs. NE-SW.
25.30	Wash, 10 lks. wide, course NW.
	Asc. 15 ft. over SW slope.
27.80	Road, brs. NW-SE.
29.00	Spur, slopes W.
	Desc. 40 ft. over N. slope.
35.82	Intersect line 9.-10 of bdy. of H.E.S. No. 537 at 3.40 chs. N. 49° 36' E., of cor. No. 10 thereof. Thence across H.E.S. No. 537.
36.58	Wire fence, brs. NE-SW.
36.70	Wash, 15 lks. wide, 2 ft. deep, course W. Enter ploughed land.

Survey of part of the Subdivision Lines of T.23 S., R.19 E. 77

Chains

40.00 Set an iron post 5 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, supported by a md. stone, for the  $\frac{1}{4}$  sec. cor. secs. 7 and 8, with brass cap mkd.

$\frac{1}{4}$

S7 S8

1927 from which,  
 an oak, 18 ins. in diam., brs. N.34 $\frac{1}{2}$ °W., 137 lks.  
 dist., mkd.  $\frac{1}{4}$  S7 BT  
 a juniper, 12 ins. in diam., brs. S.24 $\frac{1}{2}$ °E., 232 lks.  
 dist., mkd.  $\frac{1}{4}$  S8 BT

41.05 Leave ploughed field.

50.55 Wire fence, brs. NE-SW.

51.15 Intersect line 7-8 of the boundary of H.E.S. No. 537 at 9.69 chs. S.69°57'W., of cor. No. 8 thereof. Leave H.E.S. No. 537.

54.00 Wash, 10 lks. wide, course SW.

Asc. 11 ft. over SW slope.

59.00 Desc. 16 ft. over NW slope.

62.00 Asc. 65 ft. over SE slope to

80.00 Set an iron post 5 ft. long, 2 ins. in diam., 24 ins. in the ground for the cor. secs. 5, 6, 7 and 8, with brass cap mkd.

T23S R19E

S6 S5

S7 S8

1927

from which,

an oak, 4 ins. in diam., brs. N.49 $\frac{1}{4}$ °E., 33 lks.

dist., mkd. T23S R19E S5 BT

an oak, 7 ins. in diam., brs. S.79°E., 54 lks.

dist., mkd. T23S R19E S8 BT

an oak, 7 ins. in diam., brs. S.71 $\frac{1}{4}$ °W., 45 lks.

dist., mkd. T23S R19E S7 BT

an oak, 14 ins. in diam., brs. N.45 $\frac{1}{2}$ °W., 45 lks.

dist., mkd. T23S R19E S6 BT

Land, rolling.

Soil, rocky 4th. rate on slopes; in field good 2nd. rate, sandy loam.

Timber, oak, juniper and yellow pine.

Undergrowth, scruboak, manzanita and cacti.

40.00 N.89°52'E., on random line, bet. secs. 5 and 8.

Set temp.  $\frac{1}{4}$  sec. cor.

79.86 Fall 14 lks. S. of the cor. secs. 4, 5, 8 and 9.

Thence,

S.89°46'W., on true line, bet. secs. 5 and 8.

Over rolling land, thru scattering timber and dense undergrowth.

Asc. 25 ft. along N. slope.

3.40 Desc. 200 ft. over W. slope.

10.35 Wash, 10 lks. wide, with small stream of running water course SW.

Asc. 130 ft. over E. slope.

28.50 Ridge, brs. N-S.

Desc. 126 ft. over W. slope to

78 Survey of part of the Subdivision Lines of T.23 S., R.19 E.

Chains	
39.93	Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. secs. 5 and 8, with brass cap mkd.
	$\frac{1}{4} \begin{array}{c} S 5 \\ S 8 \end{array}$
	<p style="text-align: right;">1927 from which,</p> <p>an oak, 12 ins. in diam., brs. N.13<math>\frac{1}{2}</math>°E., 26 lks. dist., mkd. <math>\frac{1}{4}</math> S5 BT</p> <p>an oak, 10 ins. in diam., brs. South 30 lks. dist., mkd. <math>\frac{1}{4}</math> S8 BT</p>
43.45	Desc. 65 ft. over W. slope.
44.65	Wash, 20 lks. wide, course SW.
48.26	Same wash, course NW. Desc. gradually over NW. slope.
50.00	Same wash, course SW. Asc. 35 ft. over SE. slope.
	Spur, slopes S.
	Desc. 55 ft. over SW. slope.
51.75	Wash, 10 lks. wide, course S.
	Asc. 135 ft. over SE. slope.
58.36	Wire fence, brs. NE-SW.
61.85	Spur, slopes SW.
	Desc. 120 ft. over NW. slope.
68.85	Wash, 10 lks. wide, course SW.
	Asc. 45 ft. over SE. slope.
76.25	Spur, slopes S.
	Desc. 40 ft. over SW. slope.
78.65	Wash, 10 lks. wide, course S.
	Asc. 35 ft. over SE. slope to
79.86	The cor. secs. 5, 6, 7 and 8.
	Land, rolling.
	Soil, rocky 4th. rate.
	Timber, oak, juniper and yellow pine.
	Undergrowth, scruboak, manzanita and cacti.
80.00	N.89°56'W., on a random line, bet. secs. 6 and 7.
80.54	Set temp. $\frac{1}{4}$ sec. cor.
	Fall 7 lks. S. of the cor. secs. 6 and 7 on W. Bdy., of Tp., hereinbefore described.
	Thence,
	S.89°53'E., on true line, bett secs. 6 and 7.
	Over mountainous land, thru thick timber and dense undergrowth. Desc. 340 ft. over E. slope.
37.80	Intersect line 1-5 of bdy of H.E.S. No. 538 at 4.43 chs. N.8°16'W. of cor. No. 5 thereof.
	Thence across H.E.S. No. 538, over level land, in small valley.
38.65	Road, brs. N-S.
39.35	Wash, 50 lks. wide, course S.15°W.
40.54	Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. secs. 6 and 7, with brass cap mkd.
	$\frac{1}{4} \begin{array}{c} S 6 \\ S 7 \end{array}$
	<p style="text-align: right;">1927 from which,</p> <p>a juniper, 12 ins. in diam., brs. N.13<math>\frac{1}{2}</math>°W., 41 lks. dist., mkd. <math>\frac{1}{4}</math> S6 BT</p> <p>a juniper, 8 ins. in diam., brs. S.15°W., 94 lks. dist., mkd. <math>\frac{1}{4}</math> S7 BT</p>



## Survey of part of the Subdivision Lines of T.23 S., R.19 E. 79

- Chains  
 41.05 Road, brs. N-S. Leave valley. Asc. 122 ft. over SW slope.  
 43.85 Intersect line 3-4 of the boundary of H.E.S. No. 538 at 2.01  
 chs. N. 38° 32' E. of cor. No. 4 thereof. Leave H.E.S. No. 538  
 46.75 Spur, slopes S. 10° E.  
 Desc. 70 ft. over E. slope.  
 51.25 Wash, 10 lks. wide, course SE.  
 Asc. 25 ft. over SW slope.  
 53.55 Desc. 35 ft. over E. slope.  
 56.35 Wash, 10 lks. wide, course S.  
 Asc. 13 ft. over SW slope.  
 57.85 Desc. 13 ft. over SE slope.  
 59.85 Wire fence, brs. NE-SW.  
 60.25 Wash, 10 lks. wide, course SW.  
 Asc. 110 ft. over NW slope.  
 68.25 Spur, slopes SW.  
 Desc. 70 ft. over SE slope.  
 72.45 Wash, 10 lks. wide, course S.  
 Asc. 70 ft. over W. slope.  
 76.15 Spur, slopes S.  
 Desc. 53 ft. over SE slope to  
 80.54 The cor. secs. 5, 6, 7 and 8.

Land, mountainous and level.  
 Soil, rocky 4th. rate, on slopes; in valley 3rd. rate.  
 Timber, oak, juniper and yellow pine.  
 Undergrowth, scruboak, manzanita, catclaw and cacti.

- N. 0° 5' W., on random line, bet. secs. 5 and 6.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.16 Fall 9 lks. E. of the cor. secs. 5, 6, 31 and 32 on N.  
 Bdy. of Tp., hereinbefore described.  
 Thence,  
 S. 0° 7' E., on true line, bet. secs. 5 and 6.  
 Over mountainous land, thru heavy timber and dense under-  
 growth.  
 Desc. 63 ft. along SW slope.  
 7.00 Spur, slopes SW:  
 Desc. 163 ft. over SE slope.  
 20.15 Wash, 10 lks. wide, course SW.  
 Asc. 86 ft. over NW slope.  
 28.15 Spur, slopes SW.  
 Desc. 100 ft. over S. slope to  
 40.16 (40.00 chs. in Northing from cor. secs. 5, 6, 7 and 8.)  
 Set an iron post 3 ft. long, 1 in. in diam., 16 ins. in  
 the ground to bedrock, supported by a md. stone, for  
 the  $\frac{1}{4}$  sec. cor. secs. 5 and 6, with brass cap mkd.

$\frac{1}{4}$

S6 S5

1927 from which,  
 a juniper, 6 ins. in diam., brs. N. 74 $\frac{1}{2}$ ° E., 23 lks.  
 dist., mkd.  $\frac{1}{4}$  S5 BT  
 an oak, 10 ins. in diam., brs. N. 62 $\frac{1}{2}$ ° W., 67 lks.  
 dist., mkd.  $\frac{1}{4}$  S6 BT

- 44.95 Desc. 50 ft. over S. slope.  
 Wash, 20 lks. wide, course SW.  
 Asc. 120 ft. over NW slope.  
 53.10 Spur, slopes SW.  
 Desc. 75 ft. over SE slope.  
 59.15 Wash, 5 lks. wide, course SW.

Chains

- Asc. 140 ft. over NW slope.  
 65.85 Wire fence, brs. NE-SW.  
 68.35 Spur, slopes SW.  
 Desc. 145 ft. over S. slope, to  
 74.65 Enter wash, course S. from NE.  
 77.55 Leave wash, course SE.  
 Desc. 8 ft. over SE slope to  
 80.16 The cor. secs. 5, 6, 7 and 8.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, oak, juniper and yellow pine.  
 Undergrowth, scruboak, manzanita and cacti.

FINAL FIELD TEST  
 of  
 Buff Transits Nos. 9940 & 10125.

The continued satisfactory adjustments of the instruments is indicated by reference to pages 2 and 3, book "B" of this Group.

GENERAL-DESCRIPTION.

The surface of this township is mountainous, rolling and level in character, the higher parts being in the northern and eastern portions. There are a number of broad level benches in the SW quarter of the township. The elevation ranges from 5,000 ft. in the SW part to 7,000 ft. above sea level along the Huachuca Divide. The portion of this township surveyed lies on the SW slope of the Huachuca Mtns. The drainage is to the Southwest. Running streams of water were found in Glance Canyon, Sunnyside Canyon (Northern part.), and Parker Canyon in the western part. There are developed springs on nearly all of the Forest & Homestead Entry Claims within the lands surveyed. There are numerous roads in the South and West parts. A trail from Sunnyside to Ft. Huachuca crosses the divide in sec. 2. Improvements within the township consist of houses, wells, and fences. A Postoffice is located at Sunnyside in section 15, where there are several houses, with a few occupants. Evidence of mineral is found throughout the Tn. Cattle were being grazed on the lands at the time of survey. There is a good growth of timber, especially oak, juniper, yellow pine, walnut and ash. The undergrowth consists of scruboak, manzanita, catclaw and cacti. The soil, except for the cultivated areas on the patented lands, is rocky, 4th. rate. The lands being farmed have a good black, sandy loam soil 2nd and 3rd. rate.



CERTIFICATE OF UNITED STATES SURVEYOR.

82

I, Charles E. Hunter U.S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Group 142, Arizona bearing date of the 1st day of July, 1926, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of

the West Boundary

North Boundary and

Subdivision lines of

Township 23 South, Range 19 East of the Gila and Salt

River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes and by diagram on page 1 hereof as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Group 142, Ariz., and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place: Phoenix, Arizona.

Charles E. Hunter U.S. Transitman

Date: April 25, 1928.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

, 19

The foregoing field notes of the survey of

executed by

under his special instructions dated, 19, having been examined, and the necessary corrections and explanations made, the said field notes, and the surveys same, are hereby approved.

U. S. Surveyor General.

certify that the foregoing transcript of the field notes of the above described surveys in

, has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.

4-680

FIELD ASSISTANTS.  
to  
Benjamin J. Kinsey, U.S. Surveyor

NAMES.	CAPACITY.
Earl Endicott	1st Chainman
Homer Pepper	2nd Chainman
R. L. Drouilhet	Flagman
Earnest Reagan	Axman
L. K. Woods	Flagman

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Benjamin J. Kinsey, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Group 142, Arizona bearing date of the 1st day of July, 1926, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, retraced all those parts or portions of the Bdy. of the Fort Huachuca Military Reservation resurveyed all those parts or portions of the East Bdy. of T. 23 S., R. 19 E. and surveyed all those parts or portions of the Bdy. of the Fort Huachuca Military Reservation, and the Subdivision Lines of Township 23 South, Range 19 East of the Gila and Salt River Base and Meridian, in the State of Arizona which are represented in the foregoing field notes <sup>and by diagram on page 1 hereof</sup> as having been executed by me, and under my direction; and that all the corners of said retracement, resurvey and survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Group 142, Ariz. and in the specific manner described in the field notes, and that the foregoing are the original field notes of such retracement, resurvey and survey.

Place: Phoenix, Arizona.

Date: April, 17-1928

Benjamin J. Kinsey  
U. S. Surveyor

APPROVAL.

OFFICE OF THE U.S. SUPERVISOR OF SURVEYS.

Denver, Colo., October 26, 1928

The foregoing field notes of the retracement of Part of the Bdy. of the Fort Huachuca Military Reservation of the resurvey of Part of the East Bdy. of T. 23 S., R. 19 E. and of the survey of Part of the Bdy. of the Fort Huachuca Military Reservation, all of the West Bdy., Part of the North Bdy., and Part of the Subdivision Lines of Township 23 South, Range 19 East of the Gila and Salt River Base and Meridian, in the State of Arizona. executed by Benjamin J. Kinsey, U.S. Surveyor and Charles E. Hunter, U.S. Transitman

under special instructions dated July 1, 1926 for Group 142, Arizona, having been examined, and the necessary corrections and explanations made, the said field notes, and the retracement, resurvey and survey are hereby approved.

Charles E. Hunter  
U. S. Supervisor of Surveys

Script of the field notes of the above described surveys in has been correctly copied from the original notes on file in this office.