

Book "D"

4-679

BOOK 3837

BOOK 3837

FIELD NOTES

OF THE RESURVEY OF

South Boundary

East Boundary

West Boundary

North Boundary

and

Subdivision Lines of

Township 4 South Range 10 East

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

Dupree R. Averill, U.S. Surveyor

Roger F. Wilson, U.S. Transitman

Otis O. Gould, U.S. Transitman


In the capacity of U. S. Surveyors, under Special Instructions dated January 5, 1928, issued by the District Cadastral Engineer to govern surveys included in Group No. 150 Arizona, which were approved by the Commissioner of the General Land Office, January 17, 1928, and Assignment Instructions dated February 1, 1928.

Resurvey commenced February 27, 1928.

Resurvey completed March 6, 1928.

~~INDEX DIAGRAM.~~

~~Township~~ _____, ~~Range~~ _____

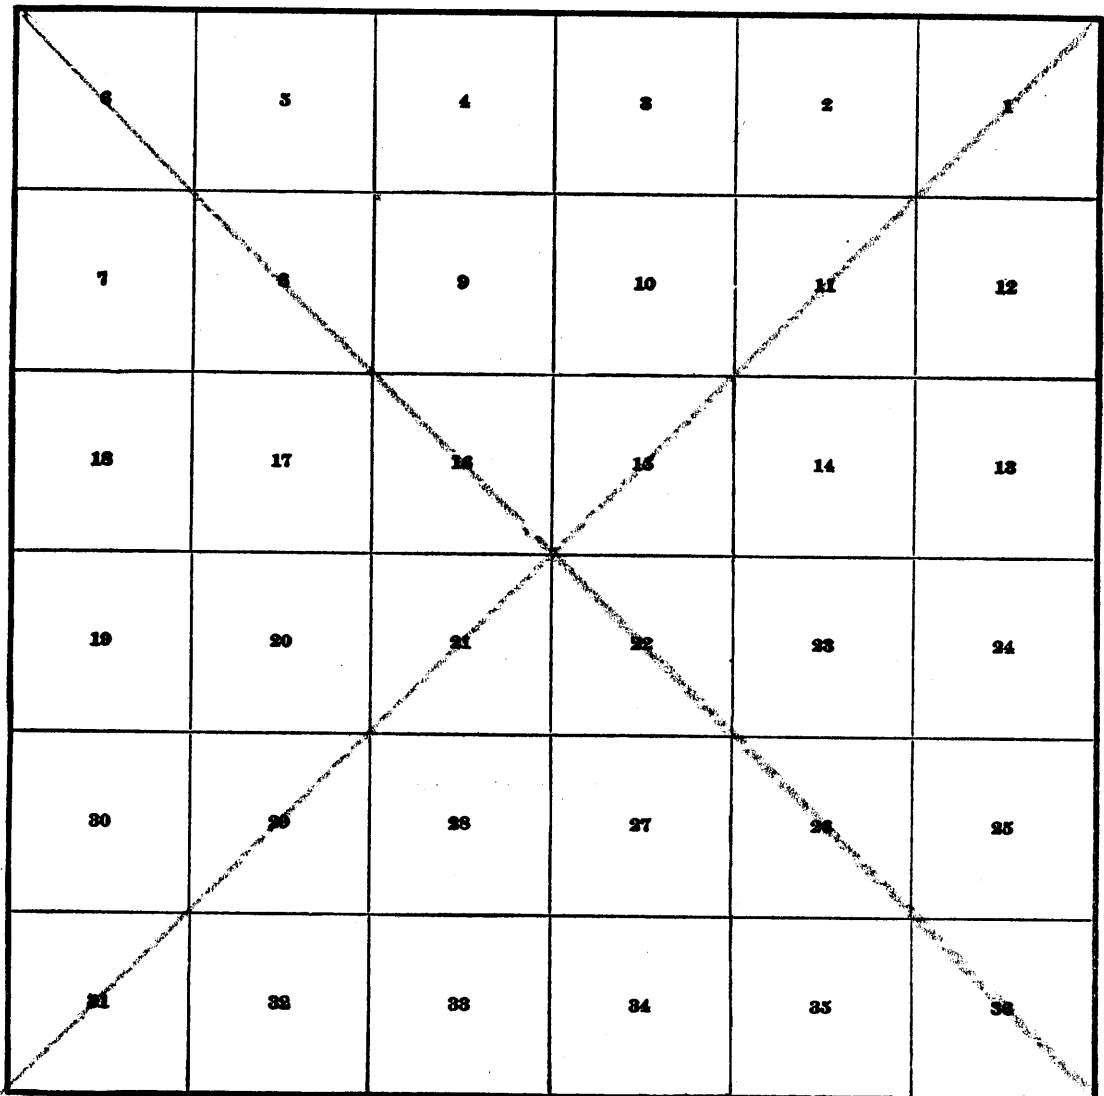


T.15.-R.9E. T.15.-R.10E.
T.25.-R.9E. T.25.-R.10E.

Book "D"

Group 150 Arizona
Township 4 South, Range 10 East

~ INDEX · DIAGRAM ~

BOOK 3837

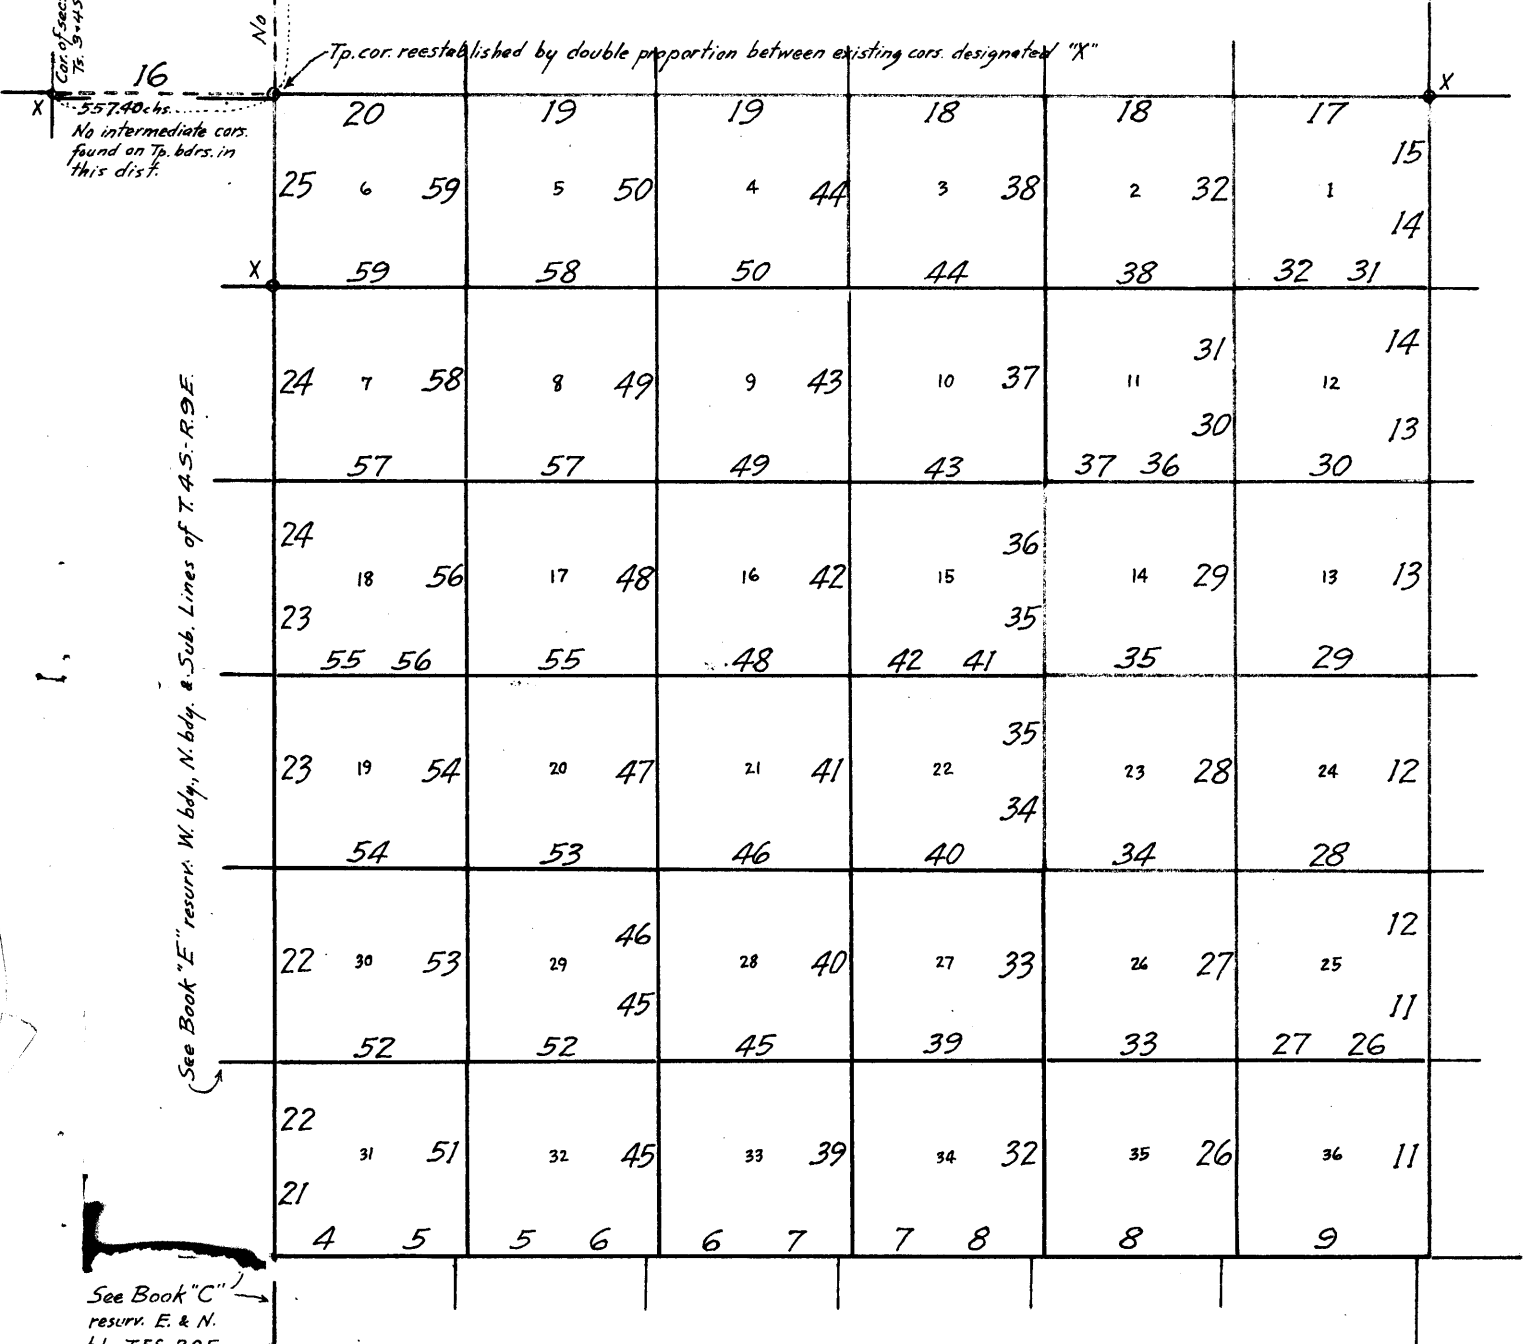

- Resurveyed by Dupree R. Averill, U.S. Surveyor under instructions Group 150
- Resurveyed by Roger F. Wilson, U.S. Transitman under instructions Group 150.
- Resurveyed by Otis O. Gould, U.S. Transitman under instructions Group 150
- - - - - Retracement W. and N. from NW cor. of the Tp., executed by Otis O. Gould, U.S. Tr. for the purpose of locating proportionate point for reestablishment of said Tp. cor.
- Accepted surveys, retracements and resurveys.

The resurveys herein described were commenced February 27, 1928, and executed by Dupree R. Averill, U.S. Surveyor, and Roger F. Wilson and Otis O. Gould, U.S. Transitmen, using Buff Solar transits Nos. 17992, 9984 and 10125, respectively. The instruments are equipped with Smith solar attachments and otherwise conform to the standard requirements of the General Land Office. Unless otherwise specified all azimuth determinations are accomplished with the solar attachment.

PRELIMINARY FIELD TEST
of
Buff transit No. 17992
by
Dupree R. Averill, U.S. Surveyor.

February 26, 1928: at the station described on page 1 of Book C, near the center of sec. 36, T.4 S., R.9 E., G. and S.R. Base and Meridian, Arizona, latitude $33^{\circ}02'$ N. and longitude $111^{\circ}22\frac{1}{2}'$ W., examine the adjustments of the instrument and find no errors; then to test the workings of the solar apparatus proceed as follows:

At 9h 0m a.m., app.t., set off $33^{\circ}02'$ on the latitude arc, $8^{\circ}58\frac{1}{2}'$ S. on the declination arc and determine a meridian with the solar which agrees with the true meridian.

At app. noon, with the latitude arc unchanged, observe the sun on the meridian; the resultant reading of the declination arc is $8^{\circ}56'$ S., which agrees with the computed declination of the sun.

At 3h 0m p.m., app.t., with the latitude arc unchanged, set off $8^{\circ}53'$ S. on the declination arc and determine a meridian with the solar which agrees with the true meridian.

As all of the observations taken during the usual hours of solar work agree within 1' of the true meridian, conclude that the instrument is in adjustment.

All measurements are made with a Lallie steel tape 5 chs. in length, compared with a Lufkin standard and found correct.

The measurements are made on the slope, the vertical angles determined with a clinometer and the slope measurements properly reduced to true horizontal distances.

PRELIMINARY FIELD TEST
of
Buff transit No. 9984
by
Roger F. Wilson, U.S. Transitman

February 26, 1928: at the same station, near the center of sec. 36, T.4 S., R.9 E., G. and S.R. Base and Meridian, Arizona, latitude $33^{\circ}02'$ N. and longitude $111^{\circ}22\frac{1}{2}'$ W., examine the adjustments of the instrument and find no errors, then to test the workings of the solar apparatus proceed as follows:

At 9h 0m a.m., app.t., set off $33^{\circ}02'$ on the latitude arc; $8^{\circ}58\frac{1}{2}'$ S. on the declination arc and determine a meridian with the solar which agrees with the true meridian.

At app. noon, with the latitude arc unchanged, observe the sun on the meridian; the resultant reading of the declination arc is $8^{\circ}56'$ S., which agrees with the computed declination of the sun.

At 3h 0m p.m., app.t., with the latitude arc unchanged, set off $8^{\circ}53'S$. on the declination arc and determine a meridian with the solar which agrees with the true meridian.

As all of the observations taken during the usual hours of solar work agree within 1' of the true meridian, conclude that the instrument is in adjustment.

All measurements are made with a Lallie steel tape 5 chs. in length, compared with a Lufkin standard and found correct.

The measurements are made on the slope, the vertical angles determined with a clinometer and the slope measurements properly reduced to true horizontal distances.

PRELIMINARY FIELD TEST

of

Buff transit No. 10125

by

Otis O. Gould, U.S. Transitman.

February 26, 1928: at the same station, near the center of sec. 36, T.4 S., R.9 E., G. and S.R. Base and Meridian, Arizona, latitude $33^{\circ}02'N$. and longitude $111^{\circ}22\frac{1}{2}'W$., examine the adjustments of the instrument and find no errors; then to test the workings of the solar apparatus proceed as follows:

At 9h 0m a.m., app.t., set off $33^{\circ}02'$ on the latitude arc; $8^{\circ}58\frac{1}{2}'S$. on the declination arc and determine a meridian with the solar which agrees with the true meridian.

At app. noon, with the latitude arc unchanged, observe the sun on the meridian; the resultant reading of the declination arc is $8^{\circ}56'S$., which agrees with the computed declination of the sun.

At 3h 0m p.m., app.t., with the latitude arc unchanged, set off $8^{\circ}53'S$. on the declination arc and determine a meridian with the solar which agrees with the true meridian.

As all of the observations taken during the usual hours of solar work agree within 1' of the true meridian, conclude that the instrument is in adjustment.

All measurements are made with a Lallie steel tape 5 chs. in length, compared with a Lufkin standard and found correct.

The measurements are made on the slope, the vertical angles determined with a clinometer and the slope measurements properly reduced to true horizontal distances.

Resurvey of the South Boundary
of
T.4 S., R.10 E.

BOOK 3837

chains

The township boundary was surveyed as to the north and south boundaries of Ts.5 and 4 S., R.10 E., respectively, by R.W. Norris, U.S.D.S., in 1869; the survey being made from west to east and terminated at his own establishment of the cor. of Ts.4 and 5 S., Rs.10 and 11 E.

In 1911, W.H. Elliott, U.S.S., retraced and resurveyed this township boundary and reestablished all corners thereon to refer to areas in T.4 S., R.10 E., only. In the same period he established closing cors. of secs. 3 and 4, 4 and 5, and 5 and 6, T.5 S., R.10 E., in connection with his survey of part of the subdivision lines of said township.

In 1922, Sidney E. Blout, U.S.C.E., retraced and resurveyed the E $\frac{1}{2}$ of S. bdy. of T.4 S., R.10 E., remonumenting the cor. of secs. 35 and 36, only. In the same period he established closing cors. of secs. land 2, and 2 and 3, T.5 S., R.10 E., in connection with his survey of the balance of the subdivision lines of said township.

No other retracement or resurvey of the S.bdy. of T.4 S., R.10 E. is of record.

The following notes describe a dependent resurvey of the S.bdy. of T.4 S., R.10 E., with remonumentation of all Elliott corners and reestablishment of the cor. of secs. 31 and 32, only, and $\frac{1}{4}$ sec. cor. on S.bdy. of sec. 31.

Retracement for Resurvey

From the cor. of Ts.4 and 5 S., Rs.9 and 10 E., described in book "C".

East on a random line, on S.bdy. of sec. 31, and W. $\frac{1}{2}$ S. bdy. sec. 32.

- 40.00 Find no trace of $\frac{1}{4}$ sec. cor. Set temp. cor.
- 73.10 Fall 36 lks. S. of clos. cor. secs. 5 and 6, T.5 S., R.10 E.
- 80.00 Find no trace of cor. of secs. 31 and 32. Set temp. cor.
- 120.42 Fall 59 lks. S. of $\frac{1}{4}$ sec. cor. sec. 32, only.

Thence, east on a random line on S.bdy. of sec. 32 (E. $\frac{1}{2}$)

- 33.17 Fall 5 lks. S. of clos. cor. secs. 4 and 5, T.5 S., R.10 E.
- 39.99 Fall 6 lks. S. of cor. of secs. 32 and 33.

Thence, east on a random line on S.bdy. of sec. 33

- 40.06 Fall 3 lks. N. of the $\frac{1}{4}$ sec. cor. sec. 33.
- 73.07 Fall 7 lks. S. of clos. cor. secs. 3 and 4, T.5 S., R.10 E.
- 80.18 Fall 9 lks. S. of cor. of secs. 33 and 34.

Thence, N. 89° 48' E. on a random line on S.bdy. of sec. 34.

- 32.96 Intersect the $\frac{1}{4}$ sec. cor. sec. 3, T.5 S., R.10 E.
- 40.12 Intersect the $\frac{1}{2}$ sec. cor. sec. 34, only.

Resurvey of the South Boundary
of
T. 4 S., R. 10 E.

chains

73.22 Intersect the clos. cor. of secs. 2 and 3, T.5 S., R.10 E.

80.40 Intersect the cor. of secs. 34 and 35, only.

Thence, N.89°53'E., on random line, on S. bdy. of sec. 35.

33.09 Intersect the $\frac{1}{4}$ sec. cor. sec. 2, T.5 S., R.10 E.

40.14 Intersect the $\frac{1}{4}$ sec. cor. sec. 35, only.

73.36 Intersect the clos. cor. of secs. 1 and 2, T.5 S., R.10 E.

80.26 Intersect the cor. of secs. 35 and 36, only.

Thence N.89°52'E., on random line, on S. bdy. of sec. 36 (W $\frac{1}{2}$)

33.24 Intersect the $\frac{1}{4}$ sec. cor. sec. 1, T.5 S., R.10 E.

40.28 Intersect the $\frac{1}{4}$ sec. cor. sec. 36, only.

Thence N.89°49'E. on random line on S. bdy. sec. 36 (E $\frac{1}{2}$)

33.17 Intersect the clos. cor. of T.5 S., Rs.10 and 11 E.

40.12 Intersect the cor. of Ts.4 S., Rs.10 and 11 E.

Resurvey

Return to the cor. of Ts.4 and 5 S., Rs.9 and 10 E.,
described in book "C".

Thence, N.89°43'E. on true line on S. bdy. of sec. 31.
Over level land, along S. side of highway, bears W. to
Florence and E. to Kelvin. A fence line extends along
S. side of road, a telephone line along N. side. Land
is covered with desert brush.

.64 Small ditch, course N.

31.64 Cor. of fences extending W. and SW. bears S., 39 lks. dist.

33.00 Old Florence Canal course SW.; center of bridge on high-
way bears N., 15 lks. dist.

40.14 Set an iron post 3 ft. long 1 in. diam. 48 ins. in ground,
(on S. side of highway) for $\frac{1}{4}$ sec. cor. sec. 31, only,
with brass cap marked.

$\frac{1}{4}$ S 31

1928

At points S.45°E. and N.45°W., 64 lks. dist., set simi-
lar iron posts 33 ins. in ground, for wit. cors., simi-
larly marked, with addition of WC in quadrants of brass
caps nearest the true corner.

40.70 Cor. of fences extending S. and E. bears S., 4 chs. dist.

40.90 Frame house bears S., 2.50 chs. dist.; Florence Golf
Course to south.

48.50 Leave S. side of highway. Extends NE. and W.

56.20 Center line of new Casa Grande-Florence Canal, 1.00 chs.
wide, course S.60°W.

64.40 Fence, extends N. and S.

Resurvey of the South Boundary
of

T. 4 S., R. 10 E.

BOOK 8837

chains

73.10 The clos. cor. of secs. 5 and 6, T.5 S., R.10 E., which is a decayed ironwood stake lying beside orig. earth mound and pits. In place of stake, which is deposited alongside.

Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for clos. cor. of secs. 5 and 6 T.5 S., R.10 E., with brass cap marked

T 4 S R 10 E
S 31

S 6 | S 5
T 5 S R 10 E
C C

1928

and raise

a mound of stone 2 ft. base 1½ ft. high south of corner.

76.60 Wash, 20 lks. wide, course N.

77.90 Road, bears N. to highway and S. to Parada grounds.

80.28 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for cor. of secs. 31 and 32, with brass cap marked

T 4 S R 10 E
S 31 | S 32

1928

and raise

a mound of stone 2 ft. base 1½ ft. high north of corner.

Land: Level.
Soil: Clay loam, rocky, 1st and 2d rate.
Timber: Paloverde, mesquite and ironwood.
Undergrowth: Greasewood, mesquite and cacti, grass.

N.89°43'E. on true line on S. bdy. of sec. 32. (W½.)
Over nearly level land, thru desert growth. Plenty brush and scattering timber.

14.00 Wash, 50 lks. wide, course N.

20.20 Wash, 30 lks. wide, course N., 1.50 chs. N. to junction with wash from SE.

21.10 Wash, 20 lks. wide, course NW.

23.30 Highway, extends NW. to Florence and SE. to Kelvin.

40.14 The ¼ sec. cor. sec. 32, which is an ironwood stake 4 ins. sq., 2 ft. long, lying on mound of earth, with orig. pits E. and W. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground, deposit marked (X) stone alongside of post, for ¼ sec. cor. sec. 32, only, with brass cap marked

¼ S 32

1928

and raise

a mound of stone 2 ft. base 1½ ft. high N. of corner.

6.

Resurvey of the South Boundary
of
T. 4 S., R. 10 E.

chains	Thence, N.89°55'E. on true line on S. bdy. of sec. 32. (E $\frac{1}{2}$.)																																				
17.70	Dry wash, 50 lks. wide, course N.																																				
33.17	The clos. cor. of secs. 4 and 5, T.5 S., R.10 E., which is an ironwood stake, 2 ft. long 4 ins. sq., lying on mound of earth and witnessed by original pits. In place of stake, which is deposited alongside, Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for clos. cor. of secs. 4, and 5, T.5 S., R.10 E., with brass cap marked <div style="text-align: center;"> <table style="margin: auto;"> <tr><td>T</td><td>4</td><td>S</td><td>R</td><td>10</td><td>E</td></tr> <tr><td></td><td></td><td>S</td><td></td><td>32</td><td></td></tr> <tr><td colspan="6" style="border-top: 1px solid black;"></td></tr> <tr><td>S</td><td>5</td><td>S</td><td>4</td><td></td><td></td></tr> <tr><td>T</td><td>5</td><td>S</td><td>R</td><td>10</td><td>E</td></tr> <tr><td></td><td></td><td>C</td><td></td><td>C</td><td></td></tr> </table> <p>1928</p> </div> and raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high S. of corner.	T	4	S	R	10	E			S		32								S	5	S	4			T	5	S	R	10	E			C		C	
T	4	S	R	10	E																																
		S		32																																	
S	5	S	4																																		
T	5	S	R	10	E																																
		C		C																																	
36.20	Old road, bears NW. and SE.																																				
39.99	The cor. of secs. 32 and 33, which is an ironwood stake, 4 ins. sq., 16 ins. above ground and marked T 4 S S 33 on NE, R 10 E S 32 on NW., 2 notches on W. and 4 notches on E. edges, witnessed by a mound of earth N. and pits NE, E. and NW. In place of stake, which is deposited along side, Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for cor. of secs. 32 and 33, with brass cap marked <div style="text-align: center;"> <table style="margin: auto;"> <tr><td>T</td><td>4</td><td>S</td><td>R</td><td>10</td><td>E</td></tr> <tr><td></td><td></td><td>S</td><td>32</td><td>S</td><td>33</td></tr> </table> <p>1928</p> </div> and deposit a marked (X) stone alongside of post. Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high N. of cor. Land: Nearly level. Soil: Clay loam, gravelly, 2d rate. Timber: Paloverde, ironwood and mesquite. Undergrowth: Greasewood, cacti, mesquite and grass.	T	4	S	R	10	E			S	32	S	33																								
T	4	S	R	10	E																																
		S	32	S	33																																

	S.89°57'E. on true line on S. bdy. of sec. 33. (W $\frac{1}{2}$.) Over nearly level land, thru brush and scattering timber.																																				
14.10	Road, bears NW. and SE.																																				
20.00	Wash, 30 lks. wide, course N.20°W.																																				
40.06	The $\frac{1}{4}$ sec. cor. sec. 33, which is an ironwood stake, 4 ins. sq., 16 ins. above ground, marked $\frac{1}{4}$ S 33 on N. and witnessed by a mound of earth N. and pits E. and W. In place of stake, which is deposited alongside, Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground (deposit marked (X) stone alongside) for $\frac{1}{4}$ sec. cor., sec. 33, with brass cap marked <div style="text-align: center;"> <table style="margin: auto;"> <tr><td>$\frac{1}{4}$</td><td>S</td><td>33</td></tr> </table> <p>1928</p> </div> and raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high N. of cor.	$\frac{1}{4}$	S	33																																	
$\frac{1}{4}$	S	33																																			

Resurvey of the South Boundary
of
T. 4 S., R. 10 E.

chains

Thence, N.89°50'E. on true line on S. bdy. of sec. 33. (E $\frac{1}{2}$.)

11.60
14.50

Wash, 40 lks. wide, course N.
Old road, bears N.10°W. and S.10°E.

33.01

The closing cor. of secs. 3 and 4, T.5 S., R.10 E., which is an ironwood stake, 4 ins. sq., 12 ins. above ground, marked T 5 S CC on N., R 10 E S 3 on SE and S4 on SW. side, witnessed by orig. mound of earth to S. and pits S., E. and W. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for clos. cor. of secs. 3 and 4, T.5 S., R.10 E., with brass cap marked

T 4 S R 10 E
S 33
S 4 S 3
T 5 S R 10 E
C C

1928

and raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft.high S.of cor.

40.12

The cor. of secs. 33 and 34, which is an ironwood stake, 4 ins. sq., 16 ins. above ground, marked T 4 S S 34 on NE. and R 10 E S 33 on NW. side, witnessed by a mound of earth N., and pits NE. and NW.; in place of stake, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam. 33 in. in ground, for cor. of secs. 33 and 34, with brass cap marked

T 4 S R 10 E
S 33 S 34

1928

Deposit a marked (X) stone alongside of post, and raise a mound of stone 2 $\frac{1}{2}$ ft. base 1 $\frac{1}{2}$ ft. high north of cor.

Land: Nearly level.

Soil: Claylike loam, gravelly, 2d rate.

Timber: Paloverde, mesquite and ironwood.

Undergrowth: Greasewood, mesquite, cacti and grass.

N.89°48'E. on true line on S. bdy. of sec. 34.
Over level land, thru dense brush and scattering timber.

13.00
20.00

Old road, bears NW. and SE.
Wash, 1 chain wide, course N.

32.96

The $\frac{1}{4}$ sec. cor. sec. 3, only, which is an iron post 1 in. diam. 8 ins. above ground, with brass cap properly marked and dated 1922.

40.12

The $\frac{1}{4}$ sec. cor. sec. 34, only, which is an ironwood stake, 2 ins. sq., 2 ft. above ground, marked $\frac{1}{4}$ S on N. and witnessed by a mound of earth N., pits E. and W. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground, (deposit marked (X) stone alongside of post) for $\frac{1}{4}$ sec. cor., sec. 34, only, with brass cap marked

$\frac{1}{4}$ S 34

1928

Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high N. of cor.

Resurvey of the South Boundary
of

T. 4 S., R. 10 E.

chains

- 49.40 Wash, 50 lks. wide, course N.
- 60.30 Wash, 30 lks. wide, course N.
- 73.22 The closing cor. of secs. 2 and 3, T.5 S., R.10 E., which is an iron post 2 ins. diam. 8 ins. above ground, properly marked and dated 1922 on brass cap.
- 80.40 The cor. of secs. 34 and 35, which is an ironwood stake, 4 ins. sq, 2 ft. long lying on ground beside a mound of earth, marked T 5 S S 35 on NE. and R 10 E S 34 on NW. side, witnessed by pits NE. and NW. In place of stake, which is deposited alongside,
- Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground, (deposit a marked (X) stone alongside of post) for cor. of secs. 34 and 35, with brass cap marked
- T 4 S R 10 E
S 34 | S 35
1928
- Raise a mound of stone 2 ft. base 1½ ft. high N. of cor.
- Land: Nearly level.
Soil: Clay loam, gravelly, 2d rate.
Timber: Paloverde, mesquite and ironwood.
Undergrowth: Greasewood, mesquite, cacti and grass.
-
- N. 89° 53' E. on true line on S. bdy. of sec. 35.
Over nearly level land, thru dense brush and scattering timber.
- 9.00 Wash, 20 lks. wide, course N.
- 33.09 The ¼ sec. cor. sec. 2, only, which is an iron post 1 in. diam. 10 ins. above ground, properly marked and dated 1922 on brass cap.
- 40.14 The ¼ sec. cor. sec. 35, which is an ironwood stake, 2 ft. long, 4 ins. diam., marked ¼ S on one side, lying on ground between old pits, with orig. mound of earth to N. In place of stake, which is deposited alongside,
- Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground (deposit marked (X) stone alongside of post) for ¼ sec. cor. sec. 35, only, with brass cap marked.
- ¼ S 35
1928
- Raise a mound of stone 2 ft. base 1½ ft. high N. of cor.
- 63.00 Wash, 30 lks. wide, course NW.
- 73.30 The clos. cor. of secs. 1 and 2, T.5 S., R.10 E., which is an iron post 2 ins. diam. 8 ins. above ground, with brass cap properly marked and dated 1922.
- 80.26 The cor. of secs. 35 and 36, which is an iron post 2 ins. diam. 8 ins. above ground, with brass cap marked
- T 4 S R 10 E
S 35 | S 36
1922
- dig out old pits, 18x18x12 ins., 3 ft. dist., NE. & NW.

Resurvey of the South Boundary
of

BOOK 3837

T. 4 S., R. 10 E.

chains

of cor.

Land: Nearly level.
Soil: Gravelly, claylike loam, 2d rate.
Timber: Paloverde, mesquite and ironwood.
Undergrowth: Greasewood, mesquite, cacti and grass.

N.89°52'E. on true line on S. bdy. of sec. 36. (W $\frac{1}{2}$.)
Over rolling land, thru dense brush and scattering timber.

1.40 Wash, 30 lks. wide, course N.20°W.

33.24 The $\frac{1}{4}$ sec. cor. sec. 1, only, which is an iron post 1 in. diam. 8 ins. above ground, with brass cap properly marked and dated 1922.

40.28 The $\frac{1}{4}$ sec. cor. sec. 36, which is an ironwood stake 4 ins. sq., 16 ins. above ground, marked $\frac{1}{4}$ S 36 on N. and witnessed by a mound of earth N. and orig. pits E. and W. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for $\frac{1}{4}$ sec. cor., sec. 36, only, with brass cap marked

$\frac{1}{4}$ S 36
1928

Deposit a marked (X) stone alongside of post, and raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high north of corner.

Thence, N.89°49'E. on true line on S. bdy. of sec. 36. (E $\frac{1}{2}$.)

33.17 The closing cor. of T.5 S., Rs.10 and 11 E., which is an iron post 3 ins. diam. 12 ins. above ground, with brass cap properly marked and dated 1911.

40.12 The cor. of T.4 S., Rs.10 and 11 E., which is an ironwood stake 4 ins. sq., 2 ft. above ground, marked T.4 S S 31 on NE. face, R 11 E S 6 on SE. face and R 10 E S 36 on NW. face, with 6 notches on each of N., E. and W. edges, and witnessed by a mound of earth north and pits, N., E., W. and S. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 3 ins. diam. 33 ins. in ground, (deposit marked (X) stone alongside of post) for cor. of T.4.S., Rs.10 and 11 E., with brass cap marked

 T 4 S
 R 10 E | R 11 E
 S 36 | S 31
 S 6
 T 5 S R 11 E
1928

Raise a mound of stone 4 ft. base 2 $\frac{1}{2}$ ft. high N. of cor.

Land: Rolling.
Soil: Clayloam and gravelly, 2d rate.
Timber: Paloverde, mesquite and ironwood.
Undergrowth: Greasewood, mesquite, cacti and grass.

Resurvey of the East Boundary
of
T. 4 S., R. 10 E.

chains

The East boundary of T.4 S., R.10 E. was surveyed in 1869, by R.W. Norris, U.S.D.S. The survey was made from south to north and Tp. cor. established by him at its termination.

In 1892, Daniel Drummond, U.S.D.S., retraced and resurveyed this township boundary in connection with his survey of T.4 S., R.11 E. boundaries, remonumenting or reestablishing all Norris corners.

No other retracement or resurvey of this township boundary is of record.

The following notes describe a dependent resurvey of the E. bdy. of T.4 S., R.10 E., preserving the alinement between all cors. and $\frac{1}{4}$ sec. cors. found, and reestablishing all lost cors. by direct proportion.

Retracement for Resurvey

From the cor. of T.4 S., Rs.10 and 11 E., on S. side of Tp., hereinbefore described.

North on a random line bet. secs. 31 and 36.

40.00 Find no trace of $\frac{1}{4}$ sec. cor. Set temp. cor.

79.86 Fall 37 lks. E. of the cor. of secs. 25,30,31 and 36.

Thence, north on a random line bet. secs. 25 and 30.

39.91 Fall 70 lks. E. of the $\frac{1}{4}$ sec. cor.

79.81 Fall 130 lks. E. of the cor. of secs. 19,24,25 and 30.

Thence, north on a random line bet. secs. 19 and 24.

39.96 Fall 5 lks. E. of the $\frac{1}{4}$ sec. cor.

79.95 Fall 88 lks. E. of the cor. of secs. 13,18,19 and 24.

Thence, north on a random line bet. secs. 13 and 18.

40.16 Fall 57 lks. E. of the $\frac{1}{4}$ sec. cor.

79.89 Fall 107 lks. E. of the cor. of secs. 7,12,13 and 18.

Thence, north on a random line bet. secs. 7 and 12, and 1 and 6.

40.00 Find no trace of $\frac{1}{4}$ sec. cor. Set temp. cor.

80.00 Find no trace of cor. of secs. 1,6,7 and 12. Set temp.cor.

119.91 Fall 164 lks. E. of the $\frac{1}{4}$ sec. cor. secs. 1 and 6.

159.60 Fall 164 lks. E. of the cor. of Ts.3 and 4 S., Rs.10 and 11 E.

Resurvey of the East Boundary
of
T. 4 S., R. 10 E.

BOOK 3887

Chains


Resurvey

Return to the cor. of T.4 S., Rs.10 and 11 E., of 1887.
of 1887., hereinbefore described.

Thence, N.0°16'W. on true line bet. secs. 31 and 36.
Over rolling land, thru dense brush and scattering timber.

30.70 Wash, 30 lks. wide, course NW.

39.93 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground
(deposit marked (X) stone alongside of post) for 1/4 sec.
cor., with brass cap marked



Raise a mound of stone 3 ft. base 2 1/2 ft. high W. of cor.


47.20 Wash, 20 lks. wide, course W.

52.10 Wash, 20 lks. wide, course W.

69.50 Wash, 20 lks. wide, course W.

79.86 The cor. of secs. 25,30,31 and 36, which is a malpais
stone, 12x8x8 ins. above ground, marked with 1 notch
on S. and 5 notches on N. side, in small mound of stone.

In place of stone, set an iron post 3 ft. long 2 ins.
diam. 10 ins. in ground, to bedrock, deposit cor. stone,
marked with a cross(X) alongside of post, in a mound of
stone, for cor. of secs. 25,30,31 and 36, with brass
cap marked



Land: Rolling.
Soil: Clay loam, gravelly and rocky, 3d rate.
Timber: Paloverde, ironwood and mesquite.
Undergrowth: Greasewood, mesquite and cacti.

N.01°00'W. on true line bet. secs. 25 and 30. (S 1/2.)
Over rolling land, thru dense brush and scattering timber.

1.20 Dim road, bears NW. and SE.

16.00 Wash, 30 lks. wide, course NW.


27.20 Wash, 30 lks. wide, course W.

33.00 Dim road, bears E. and W.

36.50 Dim road, bears E. and W.

39.92 The 1/4 sec. cor., which is a stone 12x8x6 ins. above ground,
firmly set and marked 1/4 on W. face, in small mound of
stone, in place of stone,

Set an iron post 3 ft. long 1 in. diam. 12 ins. in ground
to bedrock, deposit stone cor., marked with a cross (X)
alongside of post, in a mound of stone, for 1/4 sec. cor.,
with brass cap marked



Resurvey of the East Boundary
of

T. 4 S., R. 10 E.

chains

Thence, N.0°52'W. on true line bet. secs. 25 and 30. (N $\frac{1}{2}$.)

23.00 Dim road, bears E. and W.

39.90 The cor. of secs. 19, 24, 25 and 30, which is a granite stone 16x12x6 ins. above ground firmly set and marked with 2 notches on S. and 4 notches on N. side, in a small mound of stone. In place of stone,

Set an iron post 3 ft. long 2 ins. diam. 10 ins. in ground, to bedrock, deposit the stone cor. marked with cross (X) alongside of post, in a mound of stone, for cor. of secs. 19, 24, 25 and 30, with brass cap marked

	T 4 S		
R 10	E	R 11	E
S 24	S 19		
S 25	S 30		

1928

Land: Rolling.

Soil: Gravelly loam, claylike and rocky, 3d rate.

Timber: Paloverde, ironwood and mesquite.

Undergrowth: Greasewood, mesquite and cacti.

N.0°04'W. on true line bet. secs. 19 and 24. (S $\frac{1}{2}$.)
Over rolling land, thru dense brush.

1.90 Wash, 20 lks. wide, course W.

22.90 Wash, 70 lks. wide, course NW.

27.20 Road, dim, bears E. and W.

29.00 Wash, 30 lks. wide, course NW.

39.96 The $\frac{1}{4}$ sec. cor., which is a limestone, 8x8x6 ins. above ground, firmly set and marked $\frac{1}{4}$ on W. side, witnessed by a mound of stone west. In place of stone,Set an iron post 3 ft. long 1 in. diam. 12 ins. in ground to bedrock, deposit stone cor., marked with cross (X) alongside of post, in a mound of stone, for $\frac{1}{4}$ sec. cor. with brass cap marked

	$\frac{1}{4}$		
S 24	S 19		

1928

Thence, N.1°11'W. on true line bet. secs. 19 and 24. (N $\frac{1}{2}$.)

6.70 Dry wash, 50 lks. wide, course SW.

40.00 The cor. of secs. 13, 18, 19 and 24, which is a malpais stone, 6x6x4 ins. above ground, firmly set and marked with 3 notches on S. and 3 notches on N. side, witnessed by a small mound of stone west. In place of stone,

Set an iron post 3 ft. long 2 ins. diam. 10 ins. in ground to bedrock, deposit the stone cor., marked with a cross (X) alongside of post, in a mound of stone, for cor. of secs. 13, 18, 19 and 24, with brass cap marked

	T 4 S		
R 10	E	R 11	E
S 13	S 18		
S 24	S 19		

1928

Resurvey of the East Boundary
of

T. 4 S., R. 10 E.

BOOK 3887

obs ins


Land: Rolling.
Soil: Clay loam, gravelly and rocky, 2d and 3d rate.
Timber: Paloverde.
Undergrowth: Greasewood, mesquite and cacti.

N.0°49'W. on true line bet. secs. 13 and 18. (S $\frac{1}{4}$.)
Over rolling land, thru dense brush and scattering timber.

11.30 Wash, 30 lks. wide, course W.

40.16 The $\frac{1}{4}$ sec. cor., which is a granite stone 12x6x6 ins. above ground, firmly set and marked $\frac{1}{4}$ on W. side, witnessed by a small mound of stone west. In place of stone,

Set an iron post 3 ft. long 1 in. diam. 10 ins. in ground to bedrock, deposit stone cor. marked with a cross (X) alongside of post, in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap marked




Thence, N.0°43'W. on true line bet. secs. 13 and 18. (N $\frac{1}{2}$.)

4.00 Rock ledge or rim of land, 10 ft. high, bears NW. and SE.; descend gradual N. slope.

37.70 Dry wash, 50 lks. wide, course NW.

39.73 The cor. of secs. 7, 12, 13 and 18, which is a malpais stone, 12x8x8 ins. above ground, firmly set and marked with 4 notches on S. and 2 notches on N. side, witnessed by a small mound of stone west. In place of stone,

Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground, mark a cross (X) on stone cor. and deposit alongside post, for cor. of secs. 7, 12, 13 and 18, with brass cap marked



Raise a mound of stone 4 ft. base 2 ft. high W. of cor.

Land: Rolling.
Soil: Clay loam, rocky and gravelly, 2d and 3d rate.
Timber: Paloverde.
Undergrowth: Greasewood, mesquite and cacti.

N.0°47'W. on true line bet. secs. 7 and 12.
Over rolling land, thru dense brush.

5.00 Florence Canal, 60 lks. wide, course SW.

7.10 Road, improved, bears NE. and SW.

7.40 Telephone line bears NE. and SW.

35.00 Enter bottom land of Gila River, bears E. and W.

39.97 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground (deposit marked (X) stone alongside of post) for $\frac{1}{4}$ sec. cor., with brass cap marked

Resurvey of the East Boundary
of

T. 4 S., R. 10 E.

chs. ins

$\frac{1}{4}$
S 12 | S 7
1928

- Raise a mound of stone 4 ft. base 2 ft. high west of cor. wash.
- 40.80 Left bank of Gila River, course W.
56.00 Right bank of Gila River wash, course W. Intermittent water in wash.
- 60.30 Ditch, 3 ft. wide, course W.
65.20 Telephone line (telegraph) bears E. and W.
- 65.60 Ariz. Eastern R.R., bears E. and W.
- 74.30 Road, bears E. and W.
79.30 Road, bears NW. and SE.
- 79.94 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for cor. of secs. 1, 6, 7 and 12, with brass cap marked

T 4 S
R 10 E | R 11 E
S 1 | S 6
S 12 | S 7

1928

From which:

- An ironwood, 6 ins. diam. bears N. 36° E., 3.59 chs. dist. marked T 4 S R 11 E S 6 BT.
A mesquite, 8 ins. diam. bears S. 78° E., 3.85 chs. dist. marked T 4 S R 11 E S 7 BT.
An ironwood, 10 ins. diam. bears S. 33° W., 3.32 chs. dist. marked T 4 S R 10 E S 12 BT.
A mesquite, 6 ins. diam. bears N. 62½° W., 4.05 chs. dist. marked T 4 S R 10 E S 1 BT.

Land: Rolling.

Soil: Clay loam, gravelly and rocky, 2d and 3d rate.

Timber: Paloverde, mesquite and ironwood.

Undergrowth: Greasewood, mesquite and casti.

N. 0° 47' W. on true line bet. secs. 1 and 6. (S ½.)
Over rolling land, thru brush and scattering timber.

- .05 Fence, extends E. and W.; cor. of fences extending E. and N., bears W., 5 lks. dist.
- 29.50 Fence, extends E. and W.; cor. of fences extending E. and S., bears W., 2.50 chs. dist.
- 30.00 Leave Gila valley, continue over broken hills. Ascend.
33.00 Spur, slopes W.; descend.
37.30 Drain, course W.; ascend.
- 39.97 The ¼ sec. cor., which is a schist stone 12x8x4 ins. above ground, firmly set and marked ¼ on W. side, witnessed by a mound of stone west. In place of stone,
Set an iron post 3 ft. long 1 in. diam. 6 ins. in ground to bedrock, mark a cross (X) on stone cor. and deposit alongside post, in a mound of stone, for ¼ sec. cor., with brass cap marked

$\frac{1}{4}$
S 1 | S 6
1928


Resurvey of the East Boundary
of

T. 4 S., R. 10 E.

BOOK 3887

chains

- Thence, north on true line bet. secs. 1 and 6. (N $\frac{1}{2}$.)
- Over rolling mountainous land, thru timber and brush.
- 13.00 Enter wash, course W., from NE.
- 17.00 Leave wash, course W.; from NE.
- 17.80 Road, bears NE. and SW.
- 39.69 The cor. of Ts. 3 and 4 S., Rs. 10 and 11 E., which is a stone, 14x12x10 ins. above ground, firmly set and marked with 6 grooves on each of N., S., E. and W. faces. Alongside is an iron post 3 ins. diam. 9 ins. above ground, with brass cap marked



1927

witnessed by a mound of stone 4 ft. base and 3 ft. high south of cor.

The orig. bearing trees:

- A paloverde, 10 ins. diam. bears N. 51 $\frac{1}{2}$ ° E., 95 lks. dist. marked T 3 S R 11 E S 31 BT.
- A paloverde, 10 ins. diam. bears S. 65 $\frac{1}{2}$ ° E., 91 lks. dist. marked T 4 S R 11 E S 6 BT.
- A paloverde, 10 ins. diam. bears S. 35 $\frac{3}{4}$ ° W., 96 lks. dist. marked T 4 S R 10 E S 1 BT.
- An ironwood, 8 ins. diam. bears N. 21° W., 133 lks. dist. marked T 3 S R 10 E S 36 BT.

The iron post was set in 1927, by Theo. Vander Meer, U.S.T., in connection with his resurvey of the boundaries of T. 2 S., R. 11 E.

- Land: Rolling and rolling mountainous.
- Soil: Gravelly loam and rocky, 2d and 3d rate.
- Timber: Paloverde, mesquite and ironwood.
- Undergrowth: Greasewood, mesquite and cacti.

Resurvey of the North Boundary
of

T. 4 S., R. 10 E.

- chains The north boundary of this township was surveyed by R.W. Norris, U.S.D.S., in 1869, east to west on random and return on true line, between Tp. cors. of his own establishing.
- In 1884, A.E. Shoemaker, U.S.D.S., resurveyed the north boundary of this township, remonumenting all orig. cors., and restoring all lost cors.
- There is no other retracement or resurvey of the north boundary of T.4 S., R.10 E. of record.
- The following notes describe a reestablishment by double proportion, of the missing cor. of Ts.3 and 4 S., Rs. 9 and 10 E., and a dependent resurvey of the entire boundary bet. Ts.3 and 4 S., R.10 E., reestablishing thereon at intervals proportional to the record, all sec. and $\frac{1}{2}$ sec. cors., common to both townships.
- Retracement for Resurvey

- From the cor. of Ts.3 and 4 S., Rs.10 and 11 E., hereinbefore described.
- West on a random line bet. Ts.3 and 4 S., thru R.10 E., setting temp. cors. and $\frac{1}{2}$ sec. cors. at record distances and making diligent but futile search for orig. cors. at such distances.
- 479.07 (Record Dist.) Find no trace of cor. of Ts.3 and 4 S., Rs.9 and 10 E. Set temp. cor.(A) of Ts.3 and 4 S., Rs.9 and 10 E.
Thence,
west on a random line bet. Ts.3 and 4 S., thru R.9 E., setting temp. cors. and $\frac{1}{2}$ sec. cors. at record distances and making diligent but futile search for orig. cors. at such distances.
- 479.50 (Record dist.) Find no trace of cor. of Ts.3 and 4 S., Rs.8 and 9 E. Set temp. cor.(B) of Ts.3 and 4 S., Rs.8 and 9 E.
Thence, west on a random line bet. secs. 1 and 36, Ts.4 and 3 S., R.8 E.
- 40.00 Find no trace of $\frac{1}{2}$ sec. cor. Set temp. cor.
- 76.10 Fall 41 lks. N. of the cor. of secs. 1,2,35 and 36, described in book F.

From the orig. (Norris) cor. of secs. 1,6,7 and 12, T.4 S., Rs.9 and 10 E., hereinafter described.
North on a random line bet. secs. 1 and 6.
- 40.00 Find no trace of $\frac{1}{2}$ sec. cor. Set temp. cor.
- 80.00 Find no trace of cor. of Ts.3 and 4 S., Rs.9 and 10 E. Set temp. cor. (C) of Ts.3 and 4 S., Rs.9 and 10 E.
Thence, north on a random line thru Ts.3 and 2 S., bet. Rs.9 and 10 E., making diligent but futile search for orig. cors., at record distances.
- 1.28 Fall 3.02 chs. E. of temp. cor. (A).
- 965.70 Fall 13.55 chs. E. of the cor. of Ts.1 and 2 S., Rs.9 and 10 E., which is an iron post 3 ins. diam. 12 ins. above ground, with brass cap properly marked and dated 1914.

Resurvey of the North Boundary
of
T. 4 S., R. 10 E.

BOOK 3837

chains This cor. was set by Sidney E. Blout, U. S. Surveyor, as a perpetuation of the orig. cor., in connection with his resurvey of the boundaries of T. 1 S., R. 9 E.

The point for reestablishment of the cor. of Ts. 3 and 4 S., Rs. 9 and 10 E., determined by the random lines hereinbefore described, is therefore at 1.80 chs. E. of temp. cor. (A) and .44 chs. N. of temp. cor. (C)

The resulting bearings and lengths of the Tp. bdys. extending E. and S. from this reestablished Tp. cor. point are:

N. bdy. T. 4 S., R. 10 E., N. 89° 54' E., 477.27 chs.
W. bdy. T. 4 S., R. 10 E.,
W. of sec. 6 S. 0° 52' E., 80.44 chs.
and the bearing and length of a line from same Tp. cor. to the temp. cor. (B) of Ts. 3 & 4 S., Rs. 8 & 9 E., are; N. 89° 57' W., 481.30 chs.

The reestablishment of the cor. of Ts. 3 and 4 S., Rs. 8 & 9 E., and the determination of the true bearings and lengths of the Tp. bdrs. radiating therefrom is described in Book "E" of this group.

Resurvey.

From the cor. of Ts. 3 and 4 S., Rs. 10 and 11 E. S. 89° 54' W. on true line bet. secs. 1 and 36. Over rolling land, thru dense brush and scattering timber Ascend E. slope.

- 3.00 Spur, slopes S.; descend gradual W. slope.
- 8.00 Wash, 30 lks. wide, course S.
- 16.00 Wash, 50 lks. wide, course S.; ascend.
- 27.00 Low spur; slopes S.; descend.
- 39.00 Draw; course SW.
- 39.85 Set an iron post 3 ft. long 1 in. diam. 12 ins. in ground, to bedrock, deposit marked (X) stone alongside of post in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 36
S 1
1928

- 52.50 Wash, 30 lks. wide, course S.; ascend.
- 58.00 Low spur, slopes S.; descend.
- 64.00 Draw, course S.; ascend.
- 75.00 Spur, slopes S.; descend.
- 79.70 Set an iron post 3 ft. long 2 ins. diam., 8 ins. in ground to bedrock, deposit marked (X) stone alongside of post, in a mound of stone, for cor. of secs. 1, 2, 35 and 36, with brass cap marked

T 3 S R 10 E
S 35 | S 36
S 2 | S 1
T 4 S
1928

Land; rolling.
Soil; gravelly loam and clay, rocky, 3rd rate.
Timber; Paloverde, ironwood and mesquite.
Undergrowth; Greasewood, mesquite and cacti.

Resurvey of the North Boundary
of
T. 4 S., R. 10 E.

chains S. 89° 54' W. on true line bet. secs. 2 and 35.
Over rolling mountainous land, thru brush and scattering
timber.
Descend 41 ft.
5.40 Draw, course S.; ascend 18 ft.
11.70 Spur, slopes S.; descend 55 ft.
17.30 Draw, course S.; ascend 29 ft.
29.30 Point of low spur, slopes S.; descend 38 ft.
37.00 Wash, 2 chs. wide, course S.; ascend.
39.85 Set an iron post 3 ft. long, 1 in. diam., 12 ins. in
ground to bedrock, marked (X) stone deposited along-
side post, in a mound of stone, for $\frac{1}{4}$ sec. cor., with
brass cap marked

$$\frac{1}{4} \begin{array}{r} S \ 35 \\ S \ 2 \\ \hline 1928 \end{array}$$

41.00 Road, bears N. and S.
43.60 Old road, bears N. and S.
66.30 Wash, 2 chs. wide, course S.
79.70 Set an iron post 3 ft. long, 2 ins. diam., 12 ins. in
ground, to bedrock, deposit marked (X) stone alongside
post, in a mound of stone, for cor. of secs. 2, 3, 34
and 35, with brass cap marked

$$\begin{array}{r} T \ 3 \ S \ \quad R \ 10 \ E \\ S \ 34 \ | \ S \ 35 \\ S \ 3 \ | \ S \ 2 \\ \hline T \ 4 \ S \\ 1928 \end{array}$$

Land: Rolling mountainous.
Soil: Clay loam, gravelly and rocky, 3rd rate.
Timber: Paloverde, mesquite and ironwood.
Undergrowth: Greasewood, mesquite and cacti.

S. 89° 54' W. on true line bet. secs. 3 and 34.
Over rolling land, thru brush and scattering timber.
12.40 Road, bears N. and S. Improved and graded.
26.60 Descend 11 ft.
36.80 Wash, 1 ch. wide, course S.; ascend 12 ft.
39.85 Set an iron post 3 ft. long 1 in. diam., 14 ins. in
ground to bedrock, deposit marked (X) stone alongside
post, in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass
cap marked

$$\frac{1}{4} \begin{array}{r} S \ 34 \\ S \ 3 \\ \hline 1928 \end{array}$$

40.40 Point of low spur, slopes S.; descend.
47.30 Enter wash, course S.
54.50 Leave wash, course S.; ascend 19 ft.
72.60 Continue over gently rolling land.
79.70 Set an iron post 3 ft. long 2 ins. diam., 12 ins. in
ground to bedrock, deposit marked (X) stone alongside
post, in a mound of stone, for cor. of secs. 3, 4, 33
and 34, with brass cap marked

Resurvey of the North Boundary
of

T. 4 S., R. 10 E.

BOOK 3887

chains

T	3	S	R	10	E
S	33		S	34	
S	4		S	3	
T	4	S			

1928

Land: Rolling mountainous and rolling.
 Soil: Clayloam, gravelly and rocky, 3d rate.
 Timber: Paloverde and ironwood.
 Undergrowth: Greasewood, mesquite and cacti.

S.89°54'W. on true line bet. secs. 4 and 33.
 Over rolling land, thru brush and scattering timber.

- 2.90 Drain, course SE.; ascend.
- 5.00 Continue over level land.
- 39.85 Set an iron post 3 ft. long 1 in. diam. 12 ins. in ground to bedrock, deposit marked (X) stone alongside post, in a mound of stone for 1/4 sec. cor., with brass cap marked.

1/4	S	33
1/4	S	4

1928

48.30 Road, bears NW. and SE.

- 79.70 Set an iron post 3 ft. long 2 ins. diam. 14 ins. in ground for bedrock, deposit marked (X) stone alongside post, in a mound of stone, for cor. of secs. 4, 5, 32 and 33, with brass cap marked

T	3	S	R	10	E
S	32		S	33	
S	5		S	4	
T	4	S			

1928

Land: Rolling and level.
 Soil: Clayloam, gravelly and rocky, 3d rate.
 Timber: Paloverde and ironwood.
 Undergrowth: Greasewood, mesquite and cacti.

S.89°54'W. on true line bet. secs. 5 and 32.
 Over level land, thru brush and scattering timber.

- 39.85 Set an iron post 3 ft. long 1 in. diam. 14 ins. in ground to bedrock, deposit marked (X) stone alongside post, in a mound of stone, for 1/4 sec. cor., with brass cap marked

1/4	S	32
1/4	S	5

1928

- 41.30 Road, bears NW. and SE.
- 61.00 Road, bears NE. and SW.

- 79.70 Set an iron post 3 ft. long 2 ins. diam. 14 ins. in ground to bedrock, deposit marked (X) stone alongside of post, in a mound of stone, for cor. of secs. 5, 6, 31 and 32, with brass cap marked

Resurvey of the North Boundary
of
T. 4 S., R. 10 E.

cha ins

T 3 S R 10 E
S 31 | S 32
S 6 | S 5
T 4 S

1928

Land: Level.

Soil: Clayloam, rocky and gravelly, 3d rate.

Timber: Paloverde and ironwood.

Undergrowth: Greasewood, mesquite and cacti.

S.89°54'W. on true line bet. secs. 6 and 31.
Over level land, thru brush and scattering timber.

38.90 Road, bears N.10°E. and S.10°W..

39.85 Set an iron post 3 ft. long 1 in. diam. 34 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 31
S 6

1928

Raise a mound of stone 4 ft. base 2 $\frac{1}{2}$ ft. high N. of cor.

48.90 Highway No. 80, bears N.20°E. to Phoenix and S.20°W. to Florence.

78.77 Set an iron post 3 ft. long 3 ins. diam. 34 ins. in ground for cor. of Ts. 3 and 4 S., Rs. 9 and 10 E., with brass cap marked

T 3 S
R 9 | E R 10 E
S 36 | S 31
S 1 | S 6
T 4 S

1928

Deposit a marked (X) stone alongside of post. Raise a mound of stone 3 $\frac{1}{2}$ ft. base 2 $\frac{1}{2}$ ft. high South of corner.

Land: Level.

Soil: Clayloam, rocky and gravelly, 3d rate.

Timber: Paloverde and ironwood.

Undergrowth: Greasewood, mesquite and cacti.

Resurvey of the West Boundary
of
T. 4 S. R. 10 E.

BOOK 807

chains

The west boundary of T.4 S. R.10 E. was surveyed by R.W. Norris, U.S.D.S., in 1869.

There is no retracement or resurvey of the west boundary of this township, of record.

The following notes describe a dependent resurvey of the West boundary of T.4 S., R.10 E., preserving the alignment between orig. cors. and reestablishing lost sec. and $\frac{1}{4}$ sec. cors. by direct proportion.

Retracement for Resurvey

From the cor. of Ts.4 and 5 S., Rs.9 and 10 E., described in Book "C".

North on a random line bet. secs. 31 and 36, 25 and 30, 19 and 24, and 13 and 18, set temp. cors. at record distances, and making diligent but futile search for orig. cors.

319.76 Fall 56 lks. W. of the cor. of secs. 7,12,13 and 18.

Thence, north on a random line bet. secs. 7 and 12. ($S\frac{1}{2}$.)

39.96 Fall 17 lks. E. of the $\frac{1}{4}$ sec. cor.

Thence, north on a random line bet. secs. 7 and 12. ($N\frac{1}{2}$.)

39.77 Fall 13 lks. E. of the cor. of secs. 1,6,7 and 12.

Retracement of the line bet. secs. 1 and 6, hereinbefore described, shows the true course and distance to be N.0°52'W., 80.44 chs.

Resurvey

From the cor. of Ts.4 and 5 S., Rs.9 and 10 E., described in book "C".

N.0°06'E. on true line bet. secs. 31 and 36.
Over level land

.38 Intersection of highway, extends E. to Kelvin and W. to Florence, and road extending N. between fences. Continue along roadway.

.86 Ditch, course W.

1.00 Cor. of fences extending N. and W. bears W., 45 lks.dist.
cor.of fences extending N. and E. bears E.,45 lks.dist.

26.00 A house bears E., 4 chs. dist.

28.00 A house bears W.,1 ch. dist.

32.00 A house bears W.,1.40 chs. dist.

39.42 Cor. fences extending S.and W. bears W.,50 lks.dist.

Cor. fences extending S.and E. bears E.,39 lks.dist.

39.97 Point for $\frac{1}{4}$ sec. cor. falls in intersection of roads extending E.,W. and S., and lane to north, a place not suitable for reestablishment of permanent cor.monument.

At points N.45°E., S.45°E., S.45°W.,and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground, for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

Resurvey of the West Boundary
of

T. 4 S. R. 10 E.

chains

$$\frac{1}{4}$$

S 36	S 31
1928	

and WC in quadrants of brass caps nearest true point for cor. The NE. Wit. cor. falls on N. side of ditch, course W.

40.52 Telephone line extending N. and S. bears W., 31 lks. dist.
Cor. of fences extending E., W. and N.; continue along fence line, on W. side.

79.94 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground, deposit marked (X) stone alongside of post, for cor. of secs. 25, 30, 31 and 36, with brass cap marked

$$\frac{1}{4}$$

T 4 S	
R 9 E	R 10 E
S 25	S 30
S 36	S 31
1928	

Fence extending N. and S. bears E., 11 lks. dist.

Land: Level.

Soil: Clay loam, 1st and 2d rate.

Timber: Mesquite.

Undergrowth: Mesquite, and greasewood, where not cleared.

N. 0° 06' E. on true line bet. secs. 25 and 30.
Over level land, along fence line, thru brush.

1.62 Fence, extends E. and W., cor. of fences extending E., W.
N. and S., bears E., 11 lks. dist.

13.80 Cor. of fences extending S. and E. bears E., 15 lks. dist.
25.80 Wash, 20 lks. wide, course W.

39.97 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground
deposit marked (X) stone alongside of post, for $\frac{1}{4}$ sec.
cor., with brass cap marked

$$\frac{1}{4}$$

S 25	S 30
1928	

53.80 Left bank of Gila River wash, course W.

61.30 Right bank of Gila River wash, course W. No water in wash.

63.60 Fence, extends E. and W.

78.70 Fence, extends N. 61° E. and S. 61° W.

79.50 Old road, bears N. 60° E. and S. 60° W.

79.94 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground
for cor. of secs. 19, 24, 25 and 30, with brass cap marked

$$\frac{1}{4}$$

T 4 S.	
R 9 E	R 10 E
S 24	S 19
S 25	S 30
1928	

Resurvey of the West Boundary
of
T. 4 S., R. 10 E.

BOOK 3887

chains


deposit a marked (X) stone alongside of post; and raise a mound of stone 3 ft. base 2 ft. high west of corner.

Land: Level.
Soil: Clay loam, 1st and 2d rate.
Timber: Mesquite.
Undergrowth: Greasewood and mesquite.

N.0°06'E. on true line bet. secs. 19 and 24.
Over rolling land, thru brush and scattering timber.

- 10.00 Road, bears SE. and W.
- 10.90 Road, bears NE. and SW.
- 30.17 Ariz. Eastern R.R. bears N.57°11'E. and S.57°11'W.


39.97 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground deposit marked (X) stone alongside post, for ~~1/4~~ sec. cor., with brass cap marked



raise a mound of stone 3 ft. base 2 ft. high west of cor.

- 59.90 Road, bears N.15°E. and S.15°W.
- 64.00 Same road, bears N.10°W. and S.15°E.
- 67.20 Same road, bears N.10°E. and S.10°W.

79.94 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground deposit marked (X) stone alongside post, for cor. of secs. 13,18,19 and 24, with brass cap marked




raise a mound of stone 3 ft. base 2 ft. high west of cor.

Land: Rolling.
Soil: Clayloam, gravelly and rocky, 2d and 3d rate.
Timber: Mesquite.
Undergrowth: Greasewood, mesquite and cacti.

N.0°06'E. on true line bet. secs. 13 and 18.
Over rolling land, thru brush and scattering timber.

- 20.00 Base of low hills; ascend.
- 23.70 Road, bears N.80°E. and S.80°W.

39.97 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground deposit marked (X) stone alongside post, for $\frac{1}{4}$ sec. cor., with brass cap marked



raise a mound of stone 3 ft. base 2 ft. high west of cor.

Resurvey of the West Boundary
of

T. 4 S., R. 10 E.

chains

69.00 Drain, course SE.

77.20 Drain, course SE.

79.94 The cor. of secs. 7, 12, 13 and 18, which is a malpais stone, 18x14x10 ins. set in a small mound of stone and marked with 4 notches on S. and 2 on N. edges. In place of stone, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for cor. of secs. 7, 12, 13 and 18, with brass cap marked

T 4 S			
R 9	E	R 10	E
S 12	S 7		
S 13	S 18		

1928

and raise the mound of stone 3 ft. base 2 ft. high W. of cor.

Land: Rolling hills.

Soil: Clayloam, gravelly and rocky, 3d rate.

Timber: Mesquite and paloverde.

Undergrowth: Greasewood, mesquite and cacti.

N.0°15'W. on true line bet. secs. 7 and 12. ($S\frac{1}{2}$)
Over rolling hills, thru brush and scattering timber.

2.80 Drain, course SE.

20.00 Drain, course SE.

39.96 The $\frac{1}{4}$ sec. cor., which is a malpais stone 16x10x6 ins., set in small mound of stone and unmarked. In place of stone cor., which is marked with a cross (X) and deposited alongside,Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	
S 12	S 7

1928

raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Thence, N.0°11'W. on true line bet. secs. 7 and 12. ($N\frac{1}{2}$)

2.80 Old road, bears NE. and SW. along top of low ridge.

39.77 The cor. of secs. 1, 6, 7 and 12, which is a sandstone, 10x6x4 ins., set in a small mound of stone and unmarked. In place of stone cor., which is marked with a cross (X) and deposited alongside,

Set an iron post 3 ft. long 2 ins. diam. 27 ins. in ground for cor. of secs. 1, 6, 7 and 12, with brass cap marked

T 4 S			
R 9	E	R 10	E
S 1	S 6		
S 12	S 7		

1928

raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.

Resurvey of the West Boundary
of
T. 4 S., R. 10 E.

BOOK 3837

Chains

Land: Rolling hills.
Soil: Clayloam, rocky and gravelly, 3d rate.
Timber: Mesquite and paloverde.
Undergrowth: Greasewood, mesquite and cacti.

N.0°52'W. on true line bet. secs. land 6.
Over rolling land, thru scattering brush and timber.

- .80 Old road, bears NE. and SW. along top of low ridge.
- 14.10 Old road, bears NE. and SW.
- 34.60 Highway No. 80, bears N.31½°E. to Phoenix and S.31°W. to Florence.
- 40.22 Set an iron post 3 ft. long 1 in. diam. 18 ins. in ground to bedrock, deposit marked (X) stone alongside post, in a mound of stone, for ¼ sec. cor., with brass cap marked

1
s 1 | s 6
1928

80.44 The cor. of Ts.3 and 4 S., Rs.9 and 10 E., hereinbefore described.

Land: Rolling.
Soil: Clayloam, gravelly and rocky, 3d rate.
Timber: Mesquite and paloverde.
Undergrowth: Greasewood and mesquite.

Boundaries of Township 4 South, Range 10 East.
Latitudes, departures and closing errors.

Line Designated	True course	Distance	Latitudes		Departures	
			N.	S.	E.	W.
South Boundary	S.89°49'W.	40.12		.13		40.12:
	S.89°52'W.	40.28		.09		40.28:
	S.89°53'W.	80.26		.16		80.26:
	S.89°48'W.	80.40		.28		80.40:
	S.89°50'W.	40.12		.12		40.12:
	N.89°57'W.	40.06	.03			40.06:
	S.89°55'W.	39.99		.06		39.99:
	S.89°43'W.	120.42		.59		120.42:
West Boundary	N.0°06'E.	319.76	319.76		.56	:
	N.0°15'W.	39.96	39.96			.17:
	N.0°11'W.	39.77	39.77			.13:
	N.0°52'W.	80.44	80.44			1.22:
North Boundary	N.89°54'E.	477.27	.84		477.27	:
East Boundary	South	39.69		39.69		:
	S.0°47'E.	119.91		119.91	1.64	:
	S.0°43'E.	39.73		39.73	.50	:
	S.0°49'E.	40.16		40.16	.57	:
	S.1°11'E.	39.99		39.99	.83	:
	S.0°04'E.	39.96		39.96	.05	:
	S.0°52'E.	39.90		39.90	.60	:
	S.1°00'E.	39.92		39.91	.70	:
	S.0°16'E.	79.86		79.86	.37	:
Convergency					.47	
Totals			480.80	480.54	483.56	483.17:
			480.54		483.17	
Error in Latitude			0.26			
Error in Departure					0.39	

Resurvey of the Subdivisions
of

T. 4 S., R. 10 E.

chains

The subdivisional lines of this township were surveyed by R.W. Norris, in 1869.

There is no other resurvey or retracement of subdivisional lines in this township, of record.

The following notes describe a dependent resurvey of the subdivisional lines of T.4 S., R.10 E.; with remonumentation of orig. cors. and reestablishment of lost cors. by proportion or by collateral evidence.

From the cor. of secs. 35 and 36, only, on S.bdy. of Tp., hereinbefore described.

N.0°06'E. on true line bet. secs. 35 and 36.
Over rolling land, thru brush and scattering timber.

- 1.50 Wash, 20 lks. wide, course N.70°W.
3.50 Wash, 15 lks. wide, course N.70°W.
16.80 Wash, 10 lks. wide, course N.65°W.
26.00 Wash, 15 lks. wide, course N.80°W.
36.60 Wash, 10 lks. wide, course W.
- 40.06 Set an iron post 3 ft. long 1 in. diam. 34 ins. in ground, deposit marked (X) stone alongside post, for $\frac{1}{4}$ sec. cor., with brass cap marked
- $\frac{1}{4}$
S 35 | S 36
1928
- dig pits, 18x18x12 ins. N. and S. of cor., 3 ft. dist.
- 44.40 Wash, 15 lks. wide, course W.
55.30 Wash, course W.
67.00 Wash, course N.70°W.
71.40 Wash, 15 lks. wide, course N.70°W.
76.20 Old road, bears NW. and SE.
- 80.12 Set an iron post 3 ft. long 2 ins. diam. 14 ins. in ground to bedrock, deposit marked (X) stone alongside post, in a mound of stone for cor. of secs. 25, 26, 35 and 36, with brass cap marked

T 4 S R 10 E
S 26 | S 25
S 35 | S 36

1928

Land: Rolling.
Soil: Clayloam, gravelly, 2d and 3d rate.
Timber: Mesquite, ironwood and paloverde.
Undergrowth: Greasewood, mesquite and casti.

From the cor. of secs. 25, 30, 31 and 36, on E.bdy. of Tp., hereinbefore described.

N.89°57'W. on true line bet. secs. 25 and 36.
Over rolling land, thru dense brush and scattering timber.


- 16.00 Wash, 20 lks. wide, course SW.
20.60 Dim road, bears N.80°E. and S.80°W.

Resurvey of the Subdivisions
of
T. 4 S., R. 10 E.

BOOK 3887

chains

40.32 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for 1/4 sec. cor., with brass cap marked



1928

From which:

An ironwood, 6 ins. diam. bears N.27°E., 102 lks. dist. marked 1/4 S 25 BT.

An ironwood, 8 ins. diam. bears S.23 1/2°W., 123 lks. dist. marked 1/4 S 36 BT.

63.60 Dim road, bears NE. and SW.

80.64 The cor. of secs. 25, 26, 35 and 36.


Land: Rolling.
Soil: Clayloam, gravelly, 2d and 3d rate.
Timber: Ironwood, paloverde and mesquite.
Undergrowth: Greasewood and mesquite, and cacti.

N.1°09'W. on true line bet. secs. 25 and 26.
Over nearly level land, thru brush and scattering timber.

- 5.80 Wash, 10 lks. wide, course W.
- 11.80 Wash, 10 lks. wide, course W.
- 19.40 Dim road, bears N.70°W. and S.70°E.)
- 26.20 Wash, 15 lks. wide, course N.20°W.
- 30.90 Wash, 20 lks. wide, 3 ft. deep, course W.

40.07 Point for 1/4 sec. cor. falls in wash, 30 lks. wide, course W., a place not suitable for reestablishment of permanent corner monument, therefore at 1.00 ch. S.1° 9'E., or on section line at

39.07 Set an iron post 3 ft. long 1 in. diam. 14 ins. in ground, to bedrock, deposit marked (X) stone alongside post, in a mound of stone, for wit. cor. to 1/4 sec. cor., with brass cap marked




46.30 Wash, 10 lks. wide, course N.70°W.

50.70 Dim road, bears NW. and SE.

67.20 Wash, 10 lks. wide, course W.

80.14 Set an iron post 3 ft. long 2 ins. diam. 10 ins. in ground to bedrock, deposit marked (X) stone alongside post, in a mound of stone, for cor. of secs. 23, 24, 25 and 26, with brass cap marked



1928

Lands: Nearly level.
Soil: Clayloam, gravelly and rocky, 2d and 3d rate.
Timber: Ironwood and paloverde.
Undergrowth: Greasewood, mesquite and cacti.

Resurvey of the Subdivisions
of

chains

T. 4 S. R. 10 E.

From the cor. of secs. 19, 24, 25 and 30, on E. bdy. of Tp.,
hereinbefore described.

N. 89° 48' W. on true line bet. secs. 24 and 25.
Over rolling land, thru brush and scattering timber.

1.80 Wash, course NE.; ascend gradually.
35.90 Wash, 35 lks. wide, course NW.

40.45 Set an iron post 3 ft. long 1 in. diam. 10 ins. in ground
to bedrock, deposit marked (X) stone alongside post, in
a mound of stone, for $\frac{1}{4}$ sec. cor.; with brass cap marked

$$\begin{array}{c} \frac{1}{4} S 24 \\ S 25 \end{array}$$

1928

50.20 Wash, 20 lks. wide, course NW.
65.10 Wash, course NW.
73.00 Wash, 10 lks. wide, course NW.

80.90 The cor. of secs. 23, 24, 25 and 26.

Land: Nearly level.
Soil: Clay loam, gravelly and rocky, 3d rate.
Timber: Paloverde and ironwood.
Undergrowth: Greasewood, mesquite and cacti.

N. 1° 37' E. on true line bet. secs. 23 and 24. ($S\frac{1}{2}$.)
Over nearly level land, thru brush and scattering timber.

9.80 Wash, 1 ch. wide, course W.
24.10 Wash, course N. 60° W.

40.07 The $\frac{1}{4}$ sec. cor., which is a rotted stake lying beside old
mound of stone, in place of stake, which is deposited
alongside,

Set an iron post 3 ft. long 1 in. diam. 10 ins. in ground
to bedrock, deposit marked (X) stone alongside post, in
a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\begin{array}{c} \frac{1}{4} \\ S 23 | S 24 \end{array}$$

1928

Thence, N. 0° 40' W. on true line bet. secs. 23 and 24. ($N\frac{1}{2}$.)

13.80 Low ridge, bears E. and W.
19.50 Wash, 10 lks. wide, course W.
36.60 Low ridge, bears E. and W.

39.33 The cor. of secs. 13, 14, 23 and 24, which is a granite
stone, 14x12x8 ins. set in a mound of stone and unmarked.
In place of stone, which is marked with a cross (X) and
deposited alongside,

Set an iron post 3 ft. long 2 ins. diam. 14 ins. in ground
to bedrock, for cor. of secs. 13, 14, 23 and 24, with
brass cap marked

$$\begin{array}{c} T 4 S R 10 E \\ S 14 | S 13 \\ S 23 | S 24 \end{array}$$

1928

Resurvey of the Subdivisions
of
T. 4 S., R. 10 E.

BOOK 3887

chains

Land: Nearly level.
Soil: Clayloam, rocky and gravelly, 3d rate.
Timber: Paloverde and ironwood.
Undergrowth: Greasewood and mesquite.


From the cor. of secs. 13,18,19 and 24, on E.bdy. of Tp.,
hereinbefore described.

S.89°16'W. on true line bet. secs. 13 and 24. (E½.)
Over nearly level land, thru brush and scattering timber.

139.37

The ¼ sec. cor., which is a malpais stone, 12x6x6 ins.,
in a mound of stone, marked ¼ on N. side. In place of
stone, which is marked with a cross(X) and deposited
alongside,

Set an iron post 3 ft. long 1 in. diam. 14 ins. in ground
to bedrock, in a mound of stone, for ¼ sec. cor., with
brass cap marked



1928

Thence, N.89°40'W. on true line bet. secs. 13 and 24. (W½.)

6.00

Wash, 60 lks. wide, bourse N.

40.07


The cor. of secs. 13,14,23 and 24.

Land: Nearly level.
Soil: Clayloam, gravelly and rocky, 3d rate.
Timber: Paloverde and ironwood.
Undergrowth: Greasewood and mesquite.

N.1°45'W. on true line bet. secs. 13 and 14.
Over nearly level land, thru brush and scattering timber.
Descend gradual north slope.

39.35

Set an iron post 3 ft. long 1 in. diam. 34 ins. in ground,
for ¼ sec. cor., with brass cap marked



1928

raise a mound of stone 2 ft. base 1½ ft. high west of cor.

42.30

Wash, 30 lks. wide, course NW.

67.70

Florence Canal, 70 lks. wide, course SE.

69.00

Improved road, bears NW. and SE.

69.30

Telephone line, bears NW. and SE.

69.40

Fence, bears NW. and SE.

78.70

The cor. of secs. 11,12,13 and 14, which is a basalt
stone, 24x18x10 ins., in a mound of stone, marked (X)
on top. No other marks. In place of stone, which is
set alongside of post,

Set an iron post 3 ft. long 2 ins. diam. 30 ins. in ground
for cor. of secs. 11,12,13 and 14, with brass cap marked

Resurvey of the Subdivisions
of

T. 4 S., R. 10 E.

chains

T 4	S R 10	E
S 11	S 12	
S 14	S 13	

1928

raise a mound of stone 2 ft. base 1½ ft. high W. of cor.

Land: Nearly level.

Soil: Clayloam, gravelly and rocky, 2d and 3d rate.

Timber: Paloverde and ironwood.

Undergrowth: Mesquite, greasewood and cacti.

From the cor. of secs. 7, 12, 13 and 18, on E. bdy. of Tp.,
hereinbefore described.

S. 88° 54' W. on true line bet. secs. 12 and 13.

Over nearly level land, thru brush and scattering timber.

- 6.20 Florence Canal, 70 lks. wide, course SW.
- 8.00 Road, bears NE. and SW.
- 8.40 Telephone line, bears NE. and SW.
- 8.40 Fence, bears NE. and SW.
- 12.50 Fence, bears NW. and SE.
- 19.60 Fence, bears N. and S.
- 28.50 Left bank of Gila River wash, bears NE. and SW.; thence
over bottom land.
- 40.40 Set an iron post 3 ft. long 1 in. diam. 35 ins. in ground,
deposit marked (X) stone alongside post, for ¼ sec. cor.,
with brass cap marked

S 12
S 13

1928

Dig pits, 18x18x12 ins., E. and W. of cor., 3 ft. dist.

- 64.80 Left bank of Gila River wash, bears NW. and SE.;
- 74.80 Along N. side of old, unused canal.

80.80 The cor. of secs. 11, 12, 13 and 14.

Land: Nearly level.

Soil: Clayloam, gravelly and sandy, 2d and 3d rate.

Timber: Cottonwoods in river bottom.

Undergrowth: Greasewood, mesquite and willow.

N. 0° 35' W. on true line bet. secs. 11 and 12.

Over nearly level land, thru brush and scattering timber.

- 2.00 Left, high bank of Gila River wash, 10 ft. high, bears NE.
and SW.; continue over bottom land.
- 21.30 Right bank of Gila River wash, bears NE. and SW.; continue
over level land in valley.
- 25.23 Fence, bears E. and W.
- 37.40 Adobe house bears N. 24° W.
- 40.26 Old road, bears E. and W.
- 40.36 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground,
deposit marked (X) stone alongside post, for ¼ sec. cor.,
with brass cap marked

Resurvey of the Subdivisions
of

T. 4 S., R. 10 E.

BOOK 3887

Chains

$\frac{1}{4}$
S 11 | S 12

1928

From which

A cottonwood, 12 ins. diam. bears S.47°E., 61 lks. dist.
marked. $\frac{1}{4}$ S 12 BT.

A mesquite, 6 ins. diam. bears S.78 $\frac{1}{2}$ °W., 58 lks. dist.
marked $\frac{1}{4}$ S 11 BT.

- 40.83 Fence, extends E. and W.
45.90 Old road, bears SE. and NW.
50.50 Fence, bears NE. and SW.; right of way fence.
50.80 Telegraph line bears NE. and SW.
51.20 Ariz. Eastern R.R., bears NE. and SW. (Adobe house bears
51.80 Right of way fence, bears NE. and SW. (S.45°W.)
67.40 Fence, bears NE. and SW.
67.60 Road, bears NE. and SW. along foot of hills; continue
over rolling hills; ascend.
76.00 Wash, 10 lks. wide, course SW.
80.72 The cor. of secs. 1, 2, 11 and 12, which is a basalt stone,
16x16x9 ins. set in a mound of stone and marked with
a cross (X) on top. No other marks. In place of stone
cor., which is set alongside,

Set an iron post 3 ft. long 2 ins. diam. 30 ins. in ground
for cor. of secs. 1, 2, 11 and 12, with brass cap marked

T 4 S R 10 E
S 2 | S 1
S 11 | S 12

1928

rebuild the mound of stone, 2 ft. base 1 $\frac{1}{2}$ ft. high W.
of cor.

Land: Nearly level and rolling.

Soil: Clayloam, sandy and gravelly, 2d and 3d rate.

Timber: Cottonwood.

Undergrowth: Greasewood, mesquite, sage and cacti.

From the cor. of secs. 1, 6, 7 and 12, on E. bdy. of Tp.;
hereinbefore described.

S.89°30'W. on true line bet. secs. 1 and 12.

Over level land, thru brush and scattering timber.

- 10.50 Wash, 120 lks. wide, course S.
11.20 Road, bears N.80°E. and S.80°W.
30.00 Road, bears NE. and SW.
40.25 Set an iron post 3 ft. long 1 in. diam. 14 ins. in ground
to bedrock, deposit marked (X) stone alongside post, in
a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 1
S 12

1928

Cor. of fences extending S. and W. bears S., 2.00 chs. dist.

- 49.50 Leave level land, foot of hills, bears NE. and SW.; ascend
60 ft. over rolling broken SW. slope.

Resurvey of the Subdivisions
of

T. 4 S., R. 10 E.

chains

68.00	Wash, 30 lks. wide, course SE.
78.00	Spur, slopes S.; descend
80.50	The cor. of secs. 1, 2, 11 and 12. Land: Level and rolling hills. Soil: Clayloam, gravelly, sandy, and rocky, 2d and 3d rate. Timber: Cottonwood and mesquite. Undergrowth: Greasewood and mesquite and cacti.

	N.0°05'E. on true line bet. secs. 1 and 2. Over rolling hills, thru brush and scattering timber.
39.79	Set an iron post 3 ft. long 1 in. diam. 14 ins. in ground to bedrock, deposit marked (X) stone alongside post, in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap marked $\frac{1}{4}$ S 2 S 1 1928
46.80	Wash, 30 lks. wide, course W.
73.40	Wash, 15 lks. wide, course W.
80.27	The cor. of secs. 1, 2, 35 and 36, on N. bdy. of Tp., here- inbefore described. Land: Rolling hills. Soil: Clayloam, gravelly and rocky, 3d rate. Timber: Paloverde. Undergrowth: Greasewood, mesquite and cacti.

	From the cor. of secs. 34 and 35, on S. bdy. of Tp., here- inbefore described. N.0°03'E. on true line bet. secs. 34 and 35. Over rolling land, thru brush and scattering timber.
38.70	Wash, 20 lks. wide, course NW.
39.43	Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground, deposit marked (X) stone alongside post, for $\frac{1}{4}$ sec. cor., with brass cap marked $\frac{1}{4}$ S 34 S 35 1928 Raise a mound of stone 3 ft. base $1\frac{1}{2}$ ft. high W. of cor.
42.50	Wash, 20 lks. wide, course NW.
57.50	Wash, 20 lks. wide, course NW.
78.86	Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for cor. of secs. 26, 27, 34 and 35, with brass cap marked T 4 S R 10 E S 27 S 26 S 34 S 35 1928 Raise a mound of stone, 3 ft. base $1\frac{1}{2}$ ft. high west of cor.

Resurvey of the Subdivisions
of
T. 4 S., R. 10 E.

BOOK 3887


chains

Land: Rolling.
Soil: Clayloam, gravelly and rocky, 2d and 3d rate.
Timber: Paloverde and ironwood.
Undergrowth: Greasewood, mesquite and cacti.

From the cor. of secs. 25, 26, 35 and 36.
S. 88° 58' W. on true line bet. secs. 26 and 35.
Over rolling land, thru brush and scattering timber.

- 6.40 Wash, 15 lks. wide, course NW.
- 12.60 Wash, 20 lks. wide, course N. 20° W.
- 13.80 Road, bears NW. and SE.
- 21.20 Wash, 30 lks. wide, course NW.
- 31.70 Wash, 15 lks. wide, course N. 20° W.

40.17 Set an iron post 3 ft. long 1 in. diam. 30 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked



1928

From which
An ironwood, 5 ins. diam. bears N. 67 $\frac{1}{2}$ ° W., 85 lks. dist. marked $\frac{1}{4}$ S 26 BT.
An ironwood, 8 ins. diam. bears S. 82° W., 175 lks. dist. marked $\frac{1}{4}$ S 35 BT.

Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high N. of cor.

80.34 The cor. of secs. 26, 27, 34 and 35.


Land: Rolling.
Soil: Clayloam, rocky and gravelly, 2d and 3d rate.
Timber: Paloverde and ironwood.
Undergrowth: Greasewood, mesquite and cacti.

N. 1° 30' W. on true line bet. secs. 26 and 27. (S $\frac{1}{2}$.)
Over rolling land, thru brush and scattering timber.

12.80 Wash, 30 lks. wide, course NW.

39.44 The $\frac{1}{2}$ sec. cor., which is a granite stone, 14x9x6 ins., unmarked, in a small mound of stone. In place of stone, which is marked with a cross (X) and deposited alongside of post,

Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked



1928

raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high W. of cor.

Thence, N. 0° 26' W. on true line bet. secs. 26 and 27. (N $\frac{1}{2}$.)

40.00 The cor. of secs. 22, 23, 26 and 27, which is a basalt stone 15x12x8 ins., unmarked, set in a mound of stone. In place of stone, which is marked with a cross (X) and deposited alongside of post,

Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground

34.

Resurvey of the Subdivisions
of

T. 4 S., R. 10 E.

chains

for cor. of secs. 22, 23, 26 and 27, with brass cap marked

$$\begin{array}{c} T\ 4\ S\ R\ 10\ E \\ \hline S\ 22\ | S\ 23 \\ \hline S\ 27\ | S\ 26 \end{array}$$

1928

Rebuild the mound of stone, 3 ft. base 2 ft. high W. of cor.

Land: Rolling.

Soil: Clayloam, rocky and gravelly, 3d rate.

Timber: Paloverde and ironwood.

Undergrowth: Greasewood, mesquite and cacti.

From the cor. of secs. 23, 24, 25 and 26.

S. 88° 29' W. on true line bet. secs. 23 and 26.

Over rolling land, thru brush and scattering timber.

10.90 Wash, 20 lks. wide, course NW.

35.10 Wash, 20 lks. wide, course NW.

39.50 Road, bears NW. and SE.

40.01 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground, deposit marked (X) stone alongside post, for $\frac{1}{4}$ sec. cor. with brass cap marked

$$\frac{1}{4} \frac{S\ 23}{S\ 26}$$

1928

raise a mound of stone 3 ft. base 2 ft. high N. of cor.

43.70 Wash, 20 lks. wide, course NW.

74.00 Wash, 20 lks. wide, course NW.

80.02 The cor. of secs. 22, 23, 26 and 27.

Land: Rolling.

Soil: Clayloam, rocky and gravelly, 2d and 3d rate.

Timber: Paloverde and ironwood.

Undergrowth: Greasewood, mesquite and cacti.

N. 0° 18' E. on true line bet. secs. 22 and 23. ($S\frac{1}{2}$)
Over rolling land, thru brush and scattering timber.

5.50 Wash, 20 lks. wide, course NW.

10.20 Wash, 50 lks. wide, course NW.

27.60 Road, bears NW. and SE.

30.50 Wash, 25 lks. wide, course NW.

39.82 The $\frac{1}{4}$ sec. cor., which is a basalt stone, 12x9x3 ins., unmarked, in a mound of stone, In place of stone cor., which is marked with a cross (X) and set alongside,

Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4} \frac{S\ 22\ | S\ 23}{S\ 23}$$

1928

rebuild the mound of stone 3 ft. base 2 ft. high W. of cor.

Resurvey of the Subdivisions
of
T. 4 S. R. 10 E.

BOOK 3807

chains

Thence, N.0°24'W. on true line bet. secs. 22 and 23. (N½.)

2.20


Road, bears NW. and SE.

35.40

Wash, 50 lks. wide, course NW.

40.30

Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for cor. of secs. 14, 15, 22 and 23, with brass cap marked



1928

raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Land: Rolling.

Soil: Claylike loam, rocky and gravelly, 2d and 3d rate

Undergrowth: Greasewood, mesquite and cacti.

Timber: Paloverde and ironwood.

From the cor. of secs. 13, 14, 23 and 24.

S.88°15'W. on true line bet. secs. 14 and 23. (E½.)

Over rolling land, thru brush and scattering timber.


33.80

Wash, 30 lks. wide, course NW.

40.64

The ¼ sec. cor., which is an old mound of stone. In center of mound of stone,

Set an iron post 3 ft. long 1 in. diam. 10 ins. in ground to bedrock, deposit marked (X) stone alongside post and rebuild stone mound around post, 4 ft. base and 2 ft. high, for ¼ sec. cor., with brass cap marked



1928

Thence, S.89°45'W. on true line bet. secs. 14 and 23. (W½.)

39.00

Wash, 60 lks. wide, course NW.

39.98

The cor. of secs. 14, 15, 22 and 23.

Land: Rolling.

Soil: Clayloam, rocky and gravelly; 2d and 3d rate.

Timber: Paloverde and ironwood.

Undergrowth: Greasewood, mesquite and cacti.

N.1°09'W. on true line bet. secs. 14 and 15.

Over nearly level land, thru brush and scattering timber.

2.30


Wash, 60 lks. wide, course NW.

40.30

True point for ¼ sec. cor. falls in center of new Florence-Casa Grande canal, 80 lks. wide, course SW.

43.30

Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for wit. cor. to ¼ sec. cor., with brass cap marked



1928

Resurvey of the Subdivisions
of

T. 4 S., R. 10 E.

chains

raise a mound of stone 3 ft. base 2 ft. high W. of cor.

- 45.80 Telephone line, bears NE. and SW.
53.80 Improved road, bears NE. and SW.
67.10 Old Florence canal, 40 lks. wide, course SW.; continue over level land.
68.30 Lane, bears NE. and SW.
68.50 Fence, extends NE. and SW.; enter cultivated field.
70.00 Fence, extends SW. and NE.; cor. of fences extending N., S. and SW. bears NE., 50 lks. dist.
- 80.60 Set an iron post 3 ft. long 2 ins. diam. 36 ins. in ground in cultivated field, deposit marked (X) stone alongside of post, for cor. of secs. 10, 11, 14 and 15, with brass cap marked

T	4	S	R	10	E
		S	10		S 11
		S	15		S 14

1928

From which

A mesquite, 10 ins. diam. bears N. $43\frac{1}{2}^{\circ}$ E., 22 lks. dist. marked T. 4 S R 10 E S 11 BT.
No other trees in limits.

Land: Nearly level and level.
Soil: Clayloam, gravelly, 2d and 3d rate.
Timber: Paloverde and ironwood.
Undergrowth: Greasewood, mesquite and cacti.

From the cor. of secs. 11, 12, 13 and 14.
S. $89^{\circ}38'$ W. on true line bet. secs. 11 and 14. ($E\frac{1}{2}$)
Over nearly level land, thru brush and scattering timber.

- 11.40 Wash, 1 ch. wide, course N.; viaduct of new Florence-Casa Grande Canal over wash, bears S., 5 chs. dist.
12.40 Fence, extends N. and S.; enter field.
18.50 Ditch, 10 lks. wide, course NW.
19.80 Telephone line, bears NW. and SE.
20.80 Fence, bears NW. and SE.; leave field.
21.20 Improved road, bears NW. and SE.
21.70 Florence-Casa Grande canal, 80 lks. wide, course NW.; diversion gate for waters of old Florence canal bears NW. about 10 chs. dist.
- 39.84 The $\frac{1}{4}$ sec. cor., which is a sandstone $8x6x3$ ins. above ground, firmly set and marked with a cross (X) on top and $\frac{1}{4}$ on N. side. In place of stone, which is deposited alongside of post,
Set an iron post 3 ft. long 1 in. diam. 27 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S	11
		S 14

1928

raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.
Thence, N. $88^{\circ}49'$ W. on true line bet. secs. 11 and 14. ($W\frac{1}{2}$)

- 12.05 New Florence-Casa Grande Canal, 50 lks. wide, course SW.
13.90 Improved road, bears NE. and SW.
14.00 Telephone line, bears NE. and SW.
27.70 Old Florence Canal, 30 lks. wide, course SW.; continue over level land.
30.10 Old winding road, bears NE. and SW.

Resurvey of the Subdivisions
of
T. 4 S. R. 10 E.

BOOK 3887

Chains

30.35 Fence, extends NE. and SW.; enter cultivated field.
39.85 Fence, extends N. and S. between fields.

40.00 The cor. of secs. 10,11,14 and 15.

Land: Nearly level and level.
Soil: Clayloam, sandy and rocky, 1st and 2d rate.
Timber: Paloverde.
Undergrowth: Greasewood, mesquite and cacti.

N.0°57'W. on true line bet. secs. 10 and 11.
Over level land, thru cultivated field.

3.00 Fence, extends E. and W.; cor. of fences extending E.,W.
and S. bears E., 15 lks.dist.; leave field, continue
over level land, thru brush, and scattering timber.

5.70 Left bank of Gila River wash, bears NE. and SW.; continue
over bottom land.

10.00 Enter present bed of Gila River (dry) ., course S.70°W.

20.00 Leave bed of Gila River, course S.70°W.; continue over
nearly level land, thru brush and scattering timber.

21.10 Fence, extends S.70°W. and N.70°E.


28.00 Right of way fence, extends S.60°W. and N.60°E.

28.60 Telegraph line, extends S.60°W. and N.60°E.

29.40 Ariz. Eastern R.R., bears N.60°E. and S.60°W.

33.70 Wash, 20 lks. wide, course S.30°W.

40.30 Set an iron post 3 ft. long 1 in. diam. 20 ins.in ground
to bedrock, deposit marked (X) stone alongside of post,
in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap
marked



From which:
An ironwood, 20 ins. diam. bears S.71°E., 58 lks.dist.
marked $\frac{1}{4}$ S 11 BT.

No other tree in limits.

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.


47.00 Foot of hills, bears E. and W.; continue over rolling land.

77.00 Dry wash, 65 lks. wide, course SW.

77.70 Road, bears NW. and SE. Improved.

80.60 The cor. of secs. 2,3,10 and 11, which is a stone 12x10x8
ins., unmarked, in a mound of stone. In place of stone,
which is marked with a cross (X) and deposited alongside
of post,

Set an iron post 3 ft. long 2 ins. diam. 27 ins. in ground
for cor. of secs. 2,3,10 and 11, with brass cap marked



rebuild the mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W.of cor.

Land: Level and rolling.
Soil: Clay loam and gravelly, 2d and 3d rate.
Timber: Paloverde and ironwood.
Undergrowth: Greasewood, mesquite and cacti.

Resurvey of the Subdivisions
of

T. 4 S., R. 10 E.

chains	
	From the cor. of secs. 1, 2, 11 and 12. N. 89° 44' W. on true line bet. secs. 2 and 11, Over rolling, broken hills, thru scattering brush and timber. Descend 45 ft.
3.00	Draw, course SE.; ascend 50 ft.
8.00	Spur, slopes SE.
22.50	Wash, course SE.
36.70	Ridge-spur, slopes S.; descend 70 ft.
40.12	Set an iron post 3 ft. long 1 in. diam. 28 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \begin{array}{c} S 2 \\ S 11 \end{array}$
	1928
	raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high N. of cor. Descend 20 ft.
44.00	Wash, 20 lks. wide, course S. 20° W.; ascend 70 ft.
44.50	Dim road, bears NE. and SW.
56.50	Spur, slopes SW.; descend 70 ft.
77.00	Wash, 40 lks. wide, course SW.
80.24	The cor. of secs. 2, 3, 10 and 11. Land: Rolling hills. Soil: Clayloam, rocky and gravelly, 2d and 3d rate. Timber: Paloverde and ironwood. Undergrowth: Greasewood, mesquite and cacti.
	N. 0° 24' E. on true line bet. secs. 2 and 3. Over rolling hills, thru scattering brush and timber. Ascend 100 ft. over SE. slope.
39.85	Set an iron post 3 ft. long 1 in. diam. 20 ins. in ground to bedrock, deposit marked (X) stone alongside post, in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \begin{array}{c} S 3 S 2 \end{array}$
	1928
	From which An ironwood, 6 ins. diam. bears N. 65° E., 82 lks. dist. marked $\frac{1}{4}$ S 2 BT. No other tree in limits. Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high W. of cor.
63.00	Wash, 15 lks. wide, course SE.
79.60	The cor. of secs. 2, 3, 34 and 35, on N. bdy. of Tp., here- inbefore described. Land: Rolling hills. Soil: Clayloam, gravelly and rocky, 2d and 3d rate. Timber: Paloverde and ironwood. Undergrowth: Greasewood, mesquite and cacti.

Resurvey of the Subdivisions
of
T. 4 S., R. 10 E.

BOOK 3887


chains

From the cor. of secs. 33 and 34, only, on S.bdy. of Tp., hereinbefore described.

N.0°15'E. on true line bet. secs. 33 and 34. Over rolling land, thru brush and scattering timber.

- 8.00 Dim road, bears NW. and SE.
- 16.30 Wash, 25 lks. wide, course NW.


- 39.97 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for 1/4 sec. cor., with brass cap marked



raise a mound of stone 3 ft. base 2 ft. high W. of cor.

- 40.50 Wash, 60 lks. wide, course NW.
- 47.30 Old road, bears NW. and SE.
- 68.90 Dim road, bears NW. and SE.
- 70.00 Wash, 20 lks. wide, course NW.

- 79.94 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground, deposit marked (X) stone alongside of post, for cor. of secs. 27, 28, 33 and 34, with brass cap marked




raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Land: Rolling.
Soil: Clayloam, gravelly and rocky, 2d and 3d rate.
Timber: Paloverde and ironwood.
Undergrowth: Greasewood, mesquite and cacti.

From the cor. of secs. 26, 27, 34 and 35.
N.89°30'W. on true line bet. secs. 27 and 34.
Over rolling land, thru brush and scattering timber.

- 40.07 Set an iron post 3 ft. long 1 ins. diam. 33 ins. in ground for 1/4 sec. cor., with brass cap marked



raise a mound of stone 3 ft. base 2 ft. high N. of cor.

- 41.80 Wash, 20 lks. wide, course NW.
- 60.60 Wash, 20 lks. wide, course NW.

- 80.14 The cor. of secs. 27, 28, 33 and 34.

Land: Rolling.
Soil: Clayloam, rocky and gravelly, 2d and 3d rate.
Timber: Paloverde and ironwood.
Undergrowth: Greasewood, mesquite and cacti.


Resurvey of the Subdivisions
of
T. 4 S., R. 10 E.

chains

N.1°15'W. on true line bet. secs. 27 and 28.
Over rolling land, thru brush and scattering timber.

39.98

Set an iron post 3 ft. long 1 in. diam. 33 ins.in ground,
deposit marked (X) stone alongside of post, for $\frac{1}{4}$ sec.
cor., with brass cap marked



raise a mound of stone 3 ft. base 2 ft. high W. of cor.

46.20


Wash, 25 lks. wide, course NW.

71.60

Wash, 15 lks. wide, course NW.

79.96

Set an iron post 3 ft. long 2 ins. diam. 33 ins.in ground,
deposit marked (X) stone alongside of post, for cor. of
secs. 21,22,27 and 28, with brass cap marked



raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Land: Rolling.
Soil: Clayloam, gravelly and rocky, 2d and 3d rate.
Timber: Paloverde and ironwood.
Undergrowth: Greasewood, mesquite and cacti.

From the cor. of secs. 22,23,26 and 27.
N.89°07'W. on true line bet. secs. 22 and 27.
Over rolling land, thru brush and scattering timber.

12.00


Wash, course NW.

22.40

Wash, course N.30°W.

40.25

Set an iron post 3 ft. long 1 in. diam. 33 ins.in ground,
deposit marked (X) stone alongside of post, for $\frac{1}{4}$ sec.
cor., with brass cap marked



raise a mound of stone 2 $\frac{1}{2}$ ft. base 1 $\frac{1}{2}$ ft.high N. of cor.

40.70

Wash, course N.20°W.

57.70

Wash, 20 lks. wide, course NW.

67.50

Top of low hill, bears N. and S.

80.50

The cor. of secs. 21,22, 27 and 28.


Land: Rolling.
Soil: Clayloam, rocky and gravelly, 2d and 3d rate.
Timber: Paloverde and ironwood.
Undergrowth: Greasewood, mesquite and cacti.

Resurvey of the subdivisions
of
T. 4 S., R. 10 E.

BOOK 3887


Chains

- N.0°43'E. on true line bet. secs. 21 and 22.
Over rolling land, thru brush and scattering timber.
- 20.00 Old road, bears NE. and SW.
- 33.00 Old road, bears NE. and SW.
- 39.97 Point for $\frac{1}{4}$ sec. cor. falls in new Florence-Casa Grande canal, 1 ch. wide, course SW.
- 40.90 Set an iron post 3 ft. long 1 in. diam. 30 ins. in ground, on N. bank of canal, for wit. cor., to $\frac{1}{4}$ sec. cor., with brass cap marked



Deposit a marked (X) stone alongside of post. No other witness.

- Continue over level ground, thru brush and timber.
- 43.30 Road, bears NE. and SW.
- 48.00 Power line, extends SW. and NE.
- 49.50 Old road, bears NE. and SW.
- 51.60 Same power line, extends NW. and SE.
- 53.10 Old Florence Canal, 20 lks. wide, course SW.
- 54.70 Improved road, bears NE. and SW.; cor. of fences extending SW. and N. bears W., 64 lks. dist. Fence encloses experimental farm land of State Penitentiary.
- 55.30 Telephone line, extends NE. and SW.
- 79.60 Cor. of fences extending S. and W. bears W., 116 lks. dist.
- 79.94 Set an iron post 3 ft. long 2 ins. diam. 30 ins. in ground for cor. of secs. 15, 16, 21 and 22, with brass cap marked



1928


raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.

An adobe house, mess quarters for prison workers on the experimental farm, bears S. $31\frac{1}{2}$ °W., about 50 chs. dist.

Land: Rolling and level.
 Soil: Clayloam, rocky and gravelly, 1st and 2d rate.
 Timber: Paloverde, ironwood and cottonwood.
 Undergrowth: Mesquite, greasewood and cacti.

From the cor. of secs. 14, 15, 22 and 23.
 N.89°15'W. on true line bet. secs. 15 and 22.
 Over rolling land, thru brush and scattering timber.

- 5.00 Dry wash, 30 lks. wide, course NW.
- 39.50 Wash, 15 lks. wide, course N.
- 39.69 Set an iron post 3 ft. long 1 in. diam. 20 ins. in ground, to bedrock, deposit marked (X) stone alongside post, in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap marked



1922

From which
 An ironwood, 10 ins. diam. bears N.36°E., 92 lks. dist.

Resurvey of the Subdivisions
of

T. 4 S. R. 10 E.

chains

marked $\frac{1}{4}$ S 15 BT.

Cor. is on W. bank of wash, course N.; continue over level land.

41.00 Old road, bears NE. and SW.

46.50 New Florence-Casa Grande Canal, 50 lks. wide, course SW.

50.50 Unimproved road, bears NE. and SW.

52.30 Old Florence Canal, 30 lks. wide, course SW.

58.50 Telephone lines, extend NE. and SW.

64.50 Improved road, bears NE. and SW.

79.38 The cor. of secs. 15, 16, 21 and 22.

Land: Rolling, and level.

Soil: Clayloam, rocky and gravelly., 1st and 2d rate.

Timber: Paloverde and ironwood.

Undergrowth: Greasewood, mesquite and cacti.

N.1°34'W. on true line bet. secs. 15 and 16.

Over level land, thru scattering brush and timber.

8.50 Left bank of Gila River wash, continue over bottom land.

16.20 Enter Gila River channel, course S.70°W. (dry)

22.70 Leave Gila River channel and bottom land; continue over rolling land.

26.80 Fence, extends SW. and NE.

28.80 Fence, extends N.70°E. and S.70°W.

29.00 Telegraph line, extends N.70°E. and S.70°W.

29.35 Ariz. Eastern R.R., bears N.70°E. and S.70°W.

30.34 Rightof way fence, extends N.70°E. and S.70°W.; foot of low hills, bear NE. and SW.

32.00 Wash, 10 lks. wide, course SE.

39.98 Set an iron post 3 ft. long 1 in. diam. 6 ins. in ground to bedrock, deposit marked (X) stone alongside post, in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 16 | S 15

1928

75.60 Low ridge, bears NW. and SE.; descend 30 ft.

79.96 Set an iron post 3 ft. long 2 ins. diam. 14 ins. in ground, to bedrock, deposit marked (X) stone alongside post, in a mound of stone, for cor. of secs. 9, 10, 15 and 16, with brass cap marked

T 4 S R 10 E

S 9 | S 10

S 16 | S 15

1928

Land: Level and rolling hills.

Soil: Clayloam, rocky and gravelly, 2d and 3d rate.

Timber: Paloverde.

Undergrowth: Greasewood, mesquite and cacti.

Resurvey of the Subdivisions
of

BOOK 3001

T. 4 S., R. 10 E.

Chains


From the cor. of secs. 10,11,14 and 15.
N.89°42'W. on true line bet. secs. 10 and 15.
Over level land, across cultivated field.

8.60 Fence, extends NE. and SW.; leave cultivated field for
desert growth.

14.50 Fence, extends NE. and SW.

15.00 Left bank of Gila River wash, bears N.70°E. and S.70°W.,
continue over bottom land.

40.04 Set an iron post 3 ft. long 1 in. diam. 33 ins.in ground,
deposit marked (X) stone alongside post, for 1/4 sec. cor.,
with brass cap marked



1928

raise a mound of stone 2 ft. base 1 1/2 ft. high N. of cor.

44.70 Fence, extends N. and S.

44.80 Right bank of Gila River wash, bears N.70°E. and S.70°W.

49.90 Right of way fence, bears NE. and SW.; Telegraph line on fence.

50.36 Ariz. Eastern R.R., bears NE. and SW.

50.50 Foot of bluff, 100 ft. high, bears NE. and SW.,
continue over rolling and broken hills; ascend.

77.00 Spur, slopes N.; descend 5 ft.

80.08 The cor. of secs. 9,10,15 and 16.

Land: Level and rolling hills.
Soil: Clayloam, rocky and gravelly, 2d and 3d rate.
Timber: Cottonwood and paloverde.
Undergrowth: Greasewood, mesquite and cacti.

N.1°33'E. on true line bet. secs. 9 and 10. (S 1/2)
Over rolling hills, thru scattering brush and timber.

6.70 Wash, 15 lks. wide, course NE.


10.20 Wash, 30 lks. wide, course SE.

28.80 Spur, slopes SE.

38.80 Wash, 30 lks. wide, course SE.

39.98 The 1/4 sec. cor., which is a limestone, 12x9x3, unmarked,
in a small mound of stone. In place of stone, which is
marked with a cross (X) and deposited alongside post,

Set an iron post 3 ft. long 1 in. diam. 33 ins.in ground
for 1/4 sec. cor., with brass cap marked



1928

raise a mound of stone 2 ft. base 1 1/2 ft. high W. of cor.

Thence, N.0°18'W. on true line bet. secs. 9 and 10. (N 1/2)
Ascend 100 ft. over SW. slope.

7.70 Spur, slopes SE.; descend 145 ft. over NE. slope.

17.00 Wash, course SE., 30 lks. wide; ascend 110 ft., SW. slope.

39.30 The cor. of secs. 3,4,9 and 10, which is a sandstone, 21x
14x10 ins., set in a mound of stone and marked with 3
scratches on E. and 5 scratches on S. side. In place
of stone, which is marked with a cross (X) and deposited
alongside post,

Resurvey of the Subdivisions
of

T. 4 S., R. 10 E.

chains

Set an iron post 3 ft. long 2 ins. diam. 38 ins. in ground,
for cor. of secs. 3, 4, 9 and 10, with brass cap marked

T 4 S R 10 E
S 4 | S 3
S 9 | S 10

1928

rebuild the mound of stone 3 ft. base 2 ft. high W. of cor.

Land: Rolling hills.
Soil: Clayloam, rocky and gravelly, 2d and 3d rate.
Timber: Paloverde and ironwood.
Undergrowth: Greasewood, mesquite and cacti.

From the cor. of secs. 2, 3, 10 and 11.
S. 89° 25' W. on true line bet. secs. 3 and 10.
Over rolling hills, thru scattering brush and timber.

1.70 Wash, 25 lks. wide, course S. 20° W.
5.00 Improved road, bears NE. and S. 2 chs., thence SE.
25.40 Wash, 1 ch. wide, course S. 20° W.; ascend 120 ft., NE. slope.

38.87 Set an iron post 3 ft. long 1 in. diam. 27 ins. in ground,
for 1/4 sec. cor., with brass cap marked

S 3
S 10

1928

raise a mound of stone 3 ft. base 2 ft. high N. of cor.

Ascend 30 ft.

40.35 Spur, slopes SE.; continue ascent over SE. slope, 60 ft.
53.00 Head of draw, course S. 20° E.
59.90 Spur, slopes SW.
77.00 Drain, course SE., near head; ascend 10 ft.
77.74 The cor. of secs. 3, 4, 9 and 10.

Land: Rolling hills.
Soil: Clayloam, rocky and gravelly, 2d and 3d rate.
Timber: Paloverde and ironwood.
Undergrowth: Greasewood, mesquite and sage.

N. 1° 05' W. on true line bet. secs. 3 and 4.
Over rolling hills, thru scattering timber and brush.

39.92 Set an iron post 3 ft. long 1 in. diam. 12 ins. in ground
to bedrock, deposit a marked (X) stone alongside post,
in a mound of stone, for 1/4 sec. cor., with brass cap
marked

1/4
S 4 | S 3

1928

48.10 Low ridge, extends E. and W.; descend 80 ft. over NE. slope.
77.00 Dry wash, 20 lks. wide, course SE.; ascend 60 ft.
80.34 The cor. of secs. 3, 4, 33 and 34, on N. bdy. of Tp., here-
inbefore described.

Land: Rolling hills. Soil: loam and gravel, 3d rate.
Timber: ironwood and paloverde.
Undergrowth; greasewood, mesquite and cacti.

Resurvey of the Subdivisions
of
T. 4 S., R. 10 E.

BOOK 3887

chains From the cor. of secs. 32 and 33, on S. bdy. of Tp., here-
inbefore described.


N.0°10'W. on true line bet. secs. 32 and 33.
Over rolling land, thru brush and scattering timber.

2.50 Wash, 15 lks. wide, course NW.

5.00 Road, bears NW. and SE.

25.10 Wash, 30 lks. wide, course NW.


39.82 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked



Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

73.70 Wash, 30 lks. wide, course NW.

79.64 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground
for cor. of secs. 28, 29, 32 and 33, with brass cap marked



1928


Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Land: Rolling.
Soil: Clayloam, rocky and gravelly, 2d and 3d rate.
Timber: Paloverde and ironwood.
Undergrowth: Greasewood, mesquite and cacti.

From the cor. of secs. 27, 28, 33 and 34.
S.89°40'W. on true line bet. secs. 28 and 33.
Over rolling land, thru brush and scattering timber.

20.00 Dim road, bears NW. and SE.

40.37 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked



Raise a mound of stone 3 ft. base 2 ft. high N. of cor.

80.74 The cor. of secs. 28, 29, 32 and 33.

Land: Rolling.
Soil: Clayloam, gravelly and rocky, 2d and 3d rate.
Timber: Paloverde and ironwood.
Undergrowth: Greasewood, mesquite and cacti.

N.1°39'W. on true line bet. secs. 28 and 29. (S $\frac{1}{2}$.)
Over nearly level land, thru brush and scattering timber.

6.30 Road, bears NE. and SW.

7.00 Adobe house bears E., 8 chs. dist.

Resurvey of the Subdivisions
of

T. 4 S., R. 10 E.

10.30	Florence-Casa Grande Canal, 60 lks. wide, course SW.
13.30	Road, bears NE. and SW.
16.10	Power line, extends NE. and SW.
25.75	Old Florence Canal, course SW.
27.25	Improved road, bears NE. and SW., junction of road, bears N.
29.40	Telephone line, bears NE. and SW.
36.00	Cor. of fences extending N. and E. bears E., 40 lks. dist.
39.83	Point for $\frac{1}{4}$ sec. cor., determined from collateral evidence, i.e., center line of N. and S. road and property fence extending W. from N. and S. fence. Set an iron post 3 ft. long 1 in. diam. 38 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\begin{array}{r} \frac{1}{4} \\ S 89 S 28 \\ 1928 \end{array}$
	From which A mesquite, 12 ins. diam. bears S.61°E., 130 lks. dist. marked $\frac{1}{4}$ S 28 BT. A mesquite, 6 ins. diam. bears N.56°W., 57 lks. dist. marked $\frac{1}{4}$ S 29 BT. Cor. of fences extending N., S. and W. bears W., 40 lks. dist. Fence extending N. and S. bears E., 40 lks. dist. Cultivated fields to E. and W.

	Thence, N.0°03'E. on true line bet. secs. 28 and 29. (N $\frac{1}{2}$.) Along center line of road, between cultivated fields.
39.77	Cor. of fences extending N., S. and W. bears W., 50 lks. dist.
39.82	Point for cor. of secs. 20, 21, 28 and 29, determined from collateral evidence, i.e., center line of road extending N. and S. and property lines extending E. and W.
	Set an iron post 3 ft. long 2 ins. diam. 48 ins. in ground for cor. of secs. 20, 21, 28 and 29, with brass cap marked
	$\begin{array}{r} T 4 S R 10 E \\ S 20 S 21 \\ S 29 S 28 \\ 1928 \end{array}$
	At points N.45°W. and S.45°E., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner. Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: Ironwood. Undergrowth: Greasewood, mesquite.

	From the cor. of secs. 21, 22, 27, and 28. S.89°24'W. on true line bet. secs. 21 and 28. Over rolling land, thru brush.
6.50	Wash, 20 lks. wide, course N.20°W.; thence over level land.
17.70	Dim road, bears NE. and SW.
28.50	New Florence-Casa Grande Canal, 60 lks. wide, course S.40°W.
40.08	Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground deposit marked (X) stone alongside post, at base, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\begin{array}{r} \frac{1}{4} S 21 \\ S 28 \\ 1928 \end{array}$
41.50	Old Florence Canal, course S.35°W., 25 lks. wide.
43.00	Improved county road, bears NE. and SW.
43.60	Fence, extends N.35°E. and S.35°W. about 40 lks., thence W.
47.00	House bears N., 30 lks. dist.; continue on fence line to W.
79.66	Cor. of fences extending N., S. and E.
80.16	The cor. of secs. 20, 21, 28 and 29. Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: None. Undergrowth: Greasewood and mesquite.

Resurvey of the Subdivisions
of
T. 4 S., R. 10 E.

BOOK 300


chains

N.0°02'E. on true line bet. secs. 20 and 21. (S $\frac{1}{2}$)
Over level land, along center line of unimproved lane.
Between cultivated fields.

.13 Cor. of fences extending N., S. and E., bears E., 50 lks. dist.
2.50 House bears W., 3 chs. dist.

40.22 The $\frac{1}{4}$ sec. cor., which is a mesquite stake, 3 ins. diam.,
6 ins. long, blazed on one side, but marks no longer
visible. Alongside of stake is a stone, 24x12x12 ins,
20 ins. in ground, unmarked. In place of stake and
stone, which are deposited alongside,

Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground,
for $\frac{1}{4}$ sec. cor., with brass cap marked




At points N.45°W. and S.45°E., 64 lks. dist., set simi-
lar iron posts, for wit. cors., similarly set and marked,
with addition of WC in quadrants of brass caps nearest
the true corner.
Cor is on W. side of unimproved road in lane.

Thence, N.2°22'E. on true line bet. secs. 20 and 21. (N $\frac{1}{2}$)
Along unimproved road in lane, bears N. and S., between
cultivated fields.

.05 Cor. of fences extending N., S. and W. bears W., 44 lks. dist.
.49 Cor. of fences extending N., S. and E. bears E., 49 lks. dist.
1.50 A house bears W. about 30 chs. dist.
23.56 Cor. of fences, extending E. and S.;
Cor. of fences extending W. and S. bears W., 90 lks. dist.
End of lane and cultivation, continue over level land,
thru brush.
23.80 Left bank of Gila River wash, bears N.80°E. and S.80°W.
34.90 Right bank of Gila River wash, bears E. and W.

40.06 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground
for cor. of secs. 16, 17, 20 and 21, with brass cap marked



At points N.45°W. and S.45°E., 64 lks. dist., set iron
posts, each 3 ft. long 1 in. diam. 33 ins. in ground
for wit. cors., similarly marked, with addition of WC
in quadrants of brass caps nearest the true corner.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Mesquite, greasewood and sage.

Resurvey of the Subdivisions
of
T. 4 S., R. 10 E.

chains

- From the cor. of secs. 15, 16, 21 and 22.
S. 89° 36' W. on true line bet. secs. 16 and 21.
Over level land, thru brush. Cultivation in sec. 21.
- 9.90 Fence, extends NW. and SE.
30.70 Fence, extends N. and S.; cor. of fences extending NE.,
SW. and S. bears N., 30 lks. dist.
32.10 Fence, extends NE. and SW.
- 36.69 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground,
for wit. cor. to $\frac{1}{4}$ sec. cor., with brass cap marked
- WC $\frac{1}{4}$ $\frac{S\ 16}{S\ 21}$
- 1928
- deposit a marked (X) stone alongside of post, at base.
- A mesquite, 6 ins. diam. bears S. 20 $\frac{1}{2}$ ° W., 91 lks. dist.
marked $\frac{1}{4}$ S 21 WC BT.
No other tree in limits.
- 36.80 Left bank of Gila River wash, bears NE. and SW.; continue
over bottom land.
39.69 True point for $\frac{1}{4}$ sec. cor. falls in wash, a place not
suitable for reestablishment of permanent cor. monument.
62.20 Right bank of Gila River wash, bears NE. and SW.; continue
over level land.
69.80 Fence, extends NE. and SW.
- 79.38 The cor. of secs. 16, 17, 20 and 21.
- Land: level.
Soil: Clayloam, sandy, 1st and 2d rate.
Timber: None.
Undergrowth: mesquite, greasewood and sage.
-
- N. 1° 29' W. on true line bet. secs. 16 and 17.
Over level land, thru scattering brush.
- 6.00 Old fence, extends E. and W.
16.80 Road, bears E. and W.
17.60 Right of way fence, extends E. and W.
17.90 Telegraph line, extends E. and W.
18.30 Ariz. Eastern R.R., bears E. and W.
19.10 Right of way fence, extends E. and W.; enter cleared field.
- 40.04 Set an iron post 3 ft. long 1 in. diam. 30 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked
- $\frac{1}{4}$
S 17 | S 16
- 1928
- A mesquite, 10 ins. diam. bears S. 68 $\frac{1}{2}$ ° E., 128 lks. dist.
marked $\frac{1}{4}$ S 16 BT.
No other tree in limits.
Fence extending N. and S. bears E., 116 lks. dist.
- 47.60 Fence, extends NE. and SW. Leave cleared field.
48.90 Road, extends NE. and SW.
53.40 Fence, extends NE. and SW.; continue over rolling hills.
Ascend 100 ft.
80.08 Set an iron post 3 ft. long 2 ins. diam. 12 ins. in ground
to bedrock, deposit marked (X) stone alongside post,
in a mound of stone, for cor. of secs. 8, 9, 16 and 17
with brass cap marked

Resurvey of the Subdivisions
of
T. 4 S., R. 10 E.

BOOK 3887

chains

T 4 S R 10 E
S 8 | S 9
S 17 | S 16

1928

Land: Level and rolling hills.
Soil: Clayloam, rocky and gravelly, 2d and 3d rates
Timber: Paloverde and ironwood.
Undergrowth: Mesquite, greasewood and cacti.

From the cor. of secs. 9, 10, 15 and 16.
S. 89°41'W. on true line bet. secs. 9 and 16.
Over rolling hills, thru scattering brush and timber.
Ascend 120 ft. over NE. slope.

- 12.50 Ridge, bears NW. and SE.; continue over S. slope.
- 26.50 Ridge, bears NE. and SW.; descend 100 ft.
- 31.20 Wash, 30 lks. wide, course SW.; ascend 15 ft.
- 39.62 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for 1/4 sec. cor., with brass cap marked

1/4 S 9
S 16

1928

Raise a mound of stone 2 ft. base 1 1/2 ft. high N. of cor.

- Ascend 10 ft.
- 41.10 Road on ridge, bears N. and S.; descend 70 ft.
- 51.90 Wash, 30 lks. wide, course S.; ascend 105 ft.
- 56.70 Wash, 30 lks. wide, course S.
- 66.00 Ridge, bears NE. and SW.; cross head of ravine, course S.
- 76.00 Ridge-spur, slopes SW.
- 79.24 The cor. of secs. 8, 9, 16 and 17.

Land: Rolling Hills.
Soil: Clayloam, rocky and gravelly, 2d and 3d rates.
Timber: Paloverde and ironwood.
Undergrowth: Greasewood, mesquite and cacti.

N. 1°00'W. on true line bet. secs. 8 and 9;
Over rolling hills, thru scattering brush and timber.

- Ascend 30 ft.
- 11.00 Ridge, bears NW. and SE.; descend 50 ft.
- 22.00 Wash, 20 lks. wide, course SE.; ascend 100 ft.
- 36.00 Ridge, bears E. and W.; descend 50 ft.
- 40.03 Set an iron post 3 ft. long 1 in. diam. 20 ins. in ground to bedrock, deposit marked (X) stone alongside post, in a mound of stone, for 1/4 sec. cor., with brass cap marked

1/4
S 8 | S 9

1928

- Descend 40 ft.
- 42.20 Wash, 15 lks. wide, course SE.;
- 67.50 Wash, 10 lks. wide, course SE.
- 80.06 The cor. of secs. 4, 5, 8 and 9, which is a granite stone 20x10x5 ins., unmarked, set in a mound of stone. In place of stone, which is marked with a cross (X) and deposited alongside of post,

Resurvey of the Subdivisions
of

T. 4 S. R. 10 E.

chains

Set an iron post 3 ft. long 2 ins. diam. 27 ins. in ground
for cor. of secs. 4, 5, 8 and 9, with brass cap marked

T	4	S	R	10	E
	S	5		S	4
	S	8		S	9

1928

From which:

An ironwood, 7 ins. diam. bears S. 6° W., 57 lks. dist.
marked T 4 S R 10 E S 8 BT.

No other tree in limits.

Raise a mound of stone 2 ft. base 1½ ft. high W. of cor.

Land: Rolling hills.

Soil: Clayloam, rocky and gravelly, 3d rate.

Timber: Paloverde and ironwood.

Undergrowth: Mesquite, greasewood and cacti.

From the cor. of secs. 3, 4, 9 and 10.

N. 89° 53' W. on true line bet. secs. 4 and 9.

Over rolling hills, thru scattering timber and brush.

Ascend 20 ft.

1.00	Ridge, bears N. and S.; descend 90 ft.
9.00	Draw, course S.; ascend 70 ft.
20.10	Ridge, bears N. and S.; descend 92 ft.
36.00	Draw, course S.; ascend 45 ft.

40.83 Set an iron post 3 ft. long 1 in. diam. 20 ins. in ground
to bedrock, deposit marked (X) stone alongside post,
in a mound of stone, for ¼ sec. cor., with brass cap
marked

¼	S	4
¼	S	9

1928

Ascend 10 ft. over SE. slope.

52.00 Spur, slopes S.; descend 60 ft.

61.80 Wash, course S.; ascend 125 ft.

81.66 The cor. of secs. 4, 5, 8 and 9.

Land: Rolling hills.

Soil: Clayloam, rocky and gravelly, 3d rate.

Timber: Paloverde and ironwood.

Undergrowth: Greasewood, mesquite and cacti.

N. 0° 16' E. on true line bet. secs. 4 and 5.

Over rolling hills, thru scattering timber and brush.

30.00 Low ridge, bears E. and W.; old road along top of ridge.

39.60 Wash, 10 lks. wide, course N. 85° W.

39.90 Set an iron post 3 ft. long 1 in. diam. 27 ins. in ground
for ¼ sec. cor., with brass cap marked

¼	S	5		S	4
---	---	---	--	---	---

1928

Raise a mound of stone 2 ft. base 1½ ft. high W. of cor.

51.00 Wash, 25 lks. wide, course SW.

79.98 The cor. of secs. 4, 5, 32 and 33, on N. bdy. of Tp.,

Resurvey of the Subdivisions
of
T. 4 S., R. 10 E.

BOOK 3887

chains


hereinbefore described.

Land: Rolling hills.
Soil: Clayloam, rocky and gravelly, 3d rate.
Timber: Paloverde and ironwood.
Undergrowth: Mesquite, greasewood and cacti.

From the cor. of secs. 31 and 32, only, on S.bdy. of Tp.
hereinbefore described.
N.0°25'W. on true line bet. secs. 31 and 32.
Over level land, thru brush and scattering timber.

- 4.20 Wash, 20 lks. wide, course W.
- 9.70 Highway, bears N.66°W. to Florence and S.66°E. to Hayden.
- 11.20 Unimproved road, bears NE. and SW. (60 lks. wide)
- 16.10 New Florence-Casa Grande Canal, course S.30°W./ Road
bridge over canal bears SW., about 4 chs. dist.
- 18.50 Winding road, bears NE. and SW.
- 30.10 Old road, bears NE. and SW.
- 32.40 Old road, bears NE. and SW.
- 36.10 Old Florence canal, 30 lks. wide, course S.30°W.
- 39.60 Improved county road, bears W. and NE., at intersection
of road, bears N.

39.94 Set an iron post 3 ft. long 1 in. diam. 38 ins. in ground,
in road, for $\frac{1}{4}$ sec. cor., with brass cap marked



At points N.45°E. and S.45°W., 64 lks. dist., set simi-
lar iron posts, 35 ins. in ground, for wit. cors., simi-
larly marked, with addition of WC in quadrants of brass
caps nearest the true corner.

39.94 Telephone line extends S.80°E. and N.80°W.
A brick house bears N.54°E., about 18 chs. dist.
A house and windmill bears N.81°W., about 25 chs. dist.
A U.S.G.S. benchmark bears S.35°E., 187 lks. dist.


39.98 Power line extends E. and W.; irrigation ditch, course N.,
bears W., 12 lks. dist.

40.06 Cor. of fences extending N. and E. bears E., 34 lks. dist.

40.09 Cor. of fences extending N. and W. bears W., 56 lks. dist.
Continue along lane between cultivated fields.

79.88 Point for cor. of secs. 29, 30, 31 and 32, determined from
collateral evidence, i.e., center line of improved road
bearing N. and S., and cor. of fences extending N., S.
and W.

Set an iron post 3 ft. long 2 ins. diam. 48 ins. in ground
for cor. of secs. 29, 30, 31 and 32, with brass cap marked



At points N.45°W. and S.45°E., 64 lks. dist., set iron
posts, each 3 ft. long 1 in. diam. 33 ins. in ground; for
wit. cors., similarly marked, with addition of WC in
quadrants of brass caps nearest the true corner.

Land: Level. Timber: Ironwood.
Soil: Clayloam, 1st and 2d rate.
Undergrowth: Greasewood and mesquite.

Resurvey of the Subdivisions
of

T. 4 S., R. 10 E.

chains	
	From the cor. of secs. 28, 29, 32 and 33. S. 89° 55' W. on true line bet. secs. 29 and 32. Over level land, thru brush. and scattering timber.
5.00	New Florence-Casa Grande Canal, course S.W., 60 lks. wide.
19.75	Power line, extends N. and S.
25.90	Old Florence Canal, 25 lks. wide, course SW.
27.20	Improved county road, bears NE. and SW.
27.85	Telephone line, extends NE. and SW.; cor. of fences extending W. and NE. bears N., 30 lks. dist.; cultivated land to NW.
39.56	Cor. of fences extending N. and E. bears S., 24 lks. dist.
39.75	Lane, extends N. and S.
39.94	Fence, extends N. and S.; continue over cultivated land.
40.02	Ditch, course N.
40.25	Set an iron post 3 ft. long 1 in. diam. 35 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\begin{array}{r} \frac{1}{4} \text{ S } 29 \\ \frac{1}{4} \text{ S } 32 \\ 1928 \end{array}$
	At points N. 45° W. and S. 45° E., 64 lks. dist., set similar iron posts, 33 ins. in ground, for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true cor.
	An adobe house bears N. 63° E. (a)
	A house bears N. 6° E. (b)
44.00	A shack bears S., about 2.50 chs. dist.
80.03	Fence, extends N. and S.
80.20	Power line, extends N. and S.
80.50	The cor. of secs. 29, 30, 31 and 32.
	Adobe house bears N. 81° E. (a)
	House bears N. 63 $\frac{1}{2}$ ° E. (b)
	Windmill bears S. 26 $\frac{1}{2}$ ° W., $\frac{1}{2}$ mile dist.
	Brick house bears S. 21° E., $\frac{1}{2}$ mile dist.
	Land: Level. Soil: Clayloam, 1st rate.
	Timber: Cottonwoods, in W $\frac{1}{2}$.
	Undergrowth: Greasewood and mesquite, in E $\frac{1}{2}$.

	From the cor. of secs. 25, 30, 31 and 36, on W. bdy. of Tp., hereinbefore described.
	N. 89° 43' E. on true line bet. secs. 30 and 31.
	Over level land, thru cultivated fields.
.10	Fence, extends N. and S.
19.97	Fence, extends N. and S.; cor. of fences extending E., W. and S. bears N., 1 ch. dist.
30.00	Leave cultivation. Adobe house bears N., 120 lks. dist. Continue thru heavy mesquite brush.
39.11	Cor. of fences extending S. and E. and W. bears N., 74 lks. dist.
39.21	Ditch, course N.
39.55	Set an iron post 3 ft. long 1 in. diam. 30 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\begin{array}{r} \frac{1}{4} \text{ S } 30 \\ \frac{1}{4} \text{ S } 31 \\ 1928 \end{array}$
	From which
	A mesquite 10 ins. diam. bears N. 60° E., 144 lks. dist. marked $\frac{1}{4}$ S 30 BT.
	A mesquite, 6 ins. diam. bears S. 1° W., 113 lks. dist. marked $\frac{1}{4}$ S 31 BT.
39.71	Cor. of fences extending E., W. and N. bears N., 77 lks. dist.
54.26	Cor. of fences extending E., W. and S. bears N., 38 lks. dist.
79.03	Intersect cor. of fences extending N., S. and W.
79.50	The cor. of secs. 29, 30, 31 and 32.
	Land: Level. Soil: Clayloam, 1st rate.
	Timber: Mesquite.
	Undergrowth: Greasewood and mesquite.

Resurvey of the Subdivisions
of
T. 4 S., R. 10 E.

BOOK 3801

chains
 2.00 N.0°25'W. on true line bet. secs. 29 and 30. (S½.)
 5.00 Over level land, along center line of improved road, bet.
 39.81 cultivated fields.
 Well and tank bears W., 2 chs. dist.
 House bears W., 5 chs. dist.
 Point for ¼ sec. cor. as determined from collateral evi-
 dence. i.e., center line of improved road and fences
 extending E. and W. from property fences.
 Set an iron post 3 ft. long 1 in. diam. 36 ins. in ground
 for ¼ sec. cor., with brass cap marked

S 30 | S 29
 1928

At points N.45°W. and S.45°E., 64 lks. dist. set simi-
 lar iron posts, 33 ins. in ground, for wit. cors., simi-
 larly marked, with addition of WC in quadrants of brass
 caps nearest the true corner.
 Cor. of fences extending N., S. and W. bears W., 41 lks. dist.
 Cor. of fences extending N., S. and E. bears E., 41 lks. dist.

32.00 Thence, N.0°21'W. on true line bet. secs. 29 and 30. (N½.)
 40.59 Ranch house bears W., 1 ch. dist.
 Point for cor. of secs. 19, 20, 29 and 30, determined from
 collateral evidence, i.e., center line of improved road
 and property fences extending E. and W. from N. and S.
 property fences.
 Set an iron post 3 ft. long 2 ins. diam. 48 ins. in ground
 for cor. of secs. 19, 20, 29 and 30, with brass cap marked

T 4 S R 10 E
 S 19 | S 20
 S 30 | S 29
 1928

At points N.45°W. and S.45°E., 64 lks. dist., set iron
 posts, each 3 ft. long 1 in. diam. 33 ins. in ground,
 for wit. cors., similarly marked, with addition of WC
 in quadrants of brass caps nearest the true corner.
 Land: Level. Soil: Clayloam, 1st rate.
 Land is cleared and under cultivation.

From the cor. of secs. 20, 21, 28 and 29.
 N.89°29'W. on true line bet. secs. 20 and 29.
 Over level land, along N. side of cultivated field.
 .50 Fence, extends N. and S.; cor. of fences extending N., S.
 and W. bears S., 5 lks. dist.
 39.96 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground,
 deposit marked (X) stone alongside post, at base, for ¼
 sec. cor., with brass cap marked

¼ S 20
 ¼ S 29
 1928

40.60 A ranch house bears N.4°W. (1)
 A ranch house bears S.26°W. (2)
 A ranch house bears S.3°W. (3)
 79.52 Fence, extends N. and S.; cor. of fences extending E., W.
 and S. bears N., 36 lks. dist.
 79.92 Cor. of fences extending N., S. and E.
 The cor. of secs. 19, 20, 29 and 30.
 Ranch house bears N.42°E. (1)
 Ranch house bears S.34°E. (2)
 Ranch house bears S.18°E. (3)

Land: Level and cleared and cultivated.
 Soil: Clayloam, 1st rate.

Resurvey of the Subdivisions
of

chains

T. 4 S., R. 10 E.

- From the cor. of secs. 19, 24, 25 and 30, on W. bdy. of Tp., hereinafter described.
- N. 89° 21' E. on true line bet. secs. 19 and 30.
Over level land, thru scattering brush.
- .15 Old road, bears NE. and SW.
1.80 Old ditch, course SW.
3.70 Fence, extends NE. and SW.
32.30 Remains of old fence, extends NE. and SW.
- 32.38 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground, deposit marked (X) stone alongside of post, for wit. cor. to $\frac{1}{4}$ sec. cor., with brass cap marked
- $$\frac{1}{4} \begin{array}{c} S 19 \\ S 30 \end{array} WC$$
 1928
- Raise a mound of stone 3 ft. base 2 ft. high N. of cor.
- 33.40 Right bank of Gila River wash, bears NW. and SE.
- 39.38 True point for $\frac{1}{4}$ sec. cor. falls in Gila River wash, a place not suitable for permanent reestablishment of cor. monument.
- 57.30 Left bank of Gila River wash, bears NW. and SE.
58.00 Fence, extends NW. and SE.; enter cultivated field.
58.45 Fence, extends N. and S.; cor. of fences extending NE., SW. and S. bears N., 20 lks. dist.
78.26 Cor. of fences extending N., S. and W.
78.66 The cor. of secs. 19, 20, 29 and 30.
- Land: Level.
Soil: Clay loam and sandy, 1st and 2d rate.
Timber: Scattering cottonwoods.
Undergrowth: Greasewood and mesquite.
-
- N. 0° 23' W. on true line bet. secs. 19 and 20. ($S\frac{1}{2}$)
Over level land, along center line of lane, bears N. and S.
- 29.60 Cor. of fences extending S. and SW. bears W., 40 lks. dist.
33.70 Intersection of roads extending N., S. and NE.; continue along winding road.
- 40.00 Point for $\frac{1}{4}$ sec. cor. as identified by nearby settlers, and checked by collateral evidence.
- Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
- $$\frac{1}{4} \begin{array}{c} S 19 \\ S 20 \end{array}$$
 1928
- Raise a mound of stone 3 ft. base 2 ft. high W. of cor.
Cor. of fences extending N., S. and E. bears E., 65 lks. dist.
- Thence, N. 2° 45' E. on true line bet. secs. 19 and 20. ($N\frac{1}{2}$)
- 12.50 Cor. of fences extending S., E. and NE. bears E., 30 lks. dist.
26.00 Left bank of Gila River wash, bears NE. and SW.
29.90 Cor. of fences extending S. and E. bears W., 1.20 chs. dist.

Resurvey of the Subdivisions

Resurvey
of

BOOK 3857

T. 4 S., R. 10 E.


Chains

40.80

True point for cor. of secs. 17,18,19 and 20, falls in Gila River wash, a place not suitable for reestablishment of permanent cor.-monument.

At a point 3.38 chs. dist., N.1°15'W. therefrom,

Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for wit. cor. to cor. of secs. 17,18,19 and 20, with brass cap marked



1928

Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Land: Level.
 Soil: Clayloam, sandy, 1st and 2d rate.
 Timber: Scattering cottonwoods.
 Undergrowth: Greasewood and mesquite and sage.

From the cor. of secs. 16,17,20 and 21.
 N.89°06'W. on true line bet. secs. 17 and 20.
 Over level bottom land, thru scattering brush.

36.80


Fence, extends NE. and SW.

39.78

Cor. of fences extending N. and SE. bears N., 54 lks. dist.

40.03

Set an iron post 3 ft. long 1 in. diam. 30 ins. in ground deposit marked (X) stone alongside post, for 1/4 sec. cor., with brass cap marked



1928

No other witness available, pits impracticable.

A house bears N.12 1/2°E., about 20 chs. dist.
 A house and windmill bear N.12 1/2°W., about 20 chs. dist.

42.10

Fence, extends NW. and SE.

69.50

Right bank of Gila River wash, bears NE. and SW.

80.06

True point for cor. of secs. 17,18,19 and 20.

Land: Level bottom land.
 Soil: Sandy, 2d rate.
 Timber: Scattering mesquite.
 Undergrowth: Greasewood, sage and mesquite.

From the cor. of secs. 13,18,19 and 24, on W.bdy. of Tp., hereinbefore described.

N.88°47'E. on true line bet. secs. 18 and 19.
 Over nearly level land, thru brush and scattering timber.

6.00

Old winding road, bears NW. and SE.

20.00

Wash, 20 lks. wide, course S.

40.40

Set an iron post 3 ft. long 1 in. diam. 10 ins. in ground to bedrock, deposit marked (X) stone alongside post, in a mound of stone, for 1/4 sec. cor., with brass cap marked

Resurvey of the Subdivisions
of

T. 4 S., R. 10 E.

chains

S 18
S 19

1928

- 69.65 Ariz. Eastern R.R., bears NE. and SW. along foot of rolling hills. Continue over level bottom land.
69.96 Telegraph line, extends NE. and SW.
71.25 Road, unimproved, bears NE. and SW.
76.65 Right bank of Gila River wash, bears NE. and SW.
80.20 The true point for cor. of secs. 17,18,19 and 20.
Land: Nearly level and level.
Soil: Clayloam, gravelly and rocky, 2d and 3d rate.
Timber: Paloverde.
Undergrowth: Greasewood, mesquite and cacti.

From true point for cor. of secs. 17,18,19 and 20.
N.1°15'W. on true line bet. secs. 17 and 18.
Over bottom land of Gila River wash.

- 3.30 Right bank of Gila River wash, 15 ft. high, continue over rolling land, thru scattering brush and timber.
3.38 The wit. cor. to cor. of secs. 17,18,19 and 20.
8.00 Unimproved road, bears NE. and SW.
16.60 Right of way fence, extends NE. and SW.
17.00 Telegraph line, extends NE. and SW.
17.60 Ariz. Eastern R.R., bears NE. and SW, on curve., continue over rolling hills.
40.76 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground, deposit marked (X) stone alongside post, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 18 | S 17

1928

Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

- 76.00 Gulch, wash, 10 lks. wide, course SE.
81.52 The cor. of secs. 7,8,17 and 18, which is a malpais stone, 24x12x8 ins. set in a mound of stone and marked with 5 grooves on E. and 1 groove on W. side. In place of stone cor., which is set alongside post, at base,
Mark a cross (X) on bedrock and set an iron post 3 ft. long 2 ins. diam. in a mound of stone 4 ft. base 3 ft. high, for cor. of secs. 7,8,17 and 18, with brass cap marked

T 4 S R 10 E
S 7 | S 8
S 18 | S 17

1928

Cor. is in head of small rocky drain, course S.


Land: Rolling and rolling hills.
Undergrowth: Greasewood, mesquite and cacti.
Soil: Clayloam, rocky and gravelly, 3d rate.
Timber: Paloverde and ironwood.

Resurvey of the Subdivisions
of
T. 4 S., R. 10 E.

BOOK 8887

chains

From the cor. of secs. 8,9,16 and 17.
N.87°57'W. on true line bet. secs. 8 and 17.
Over rolling hills, thru scattering brush and timber.
Descend 60 ft.
8.50 Wash, 25 lks. wide, course SE; ascend 100 ft.
19.90 Ridge, bears N. and S.; continue along S. slope.
38.00 Spur, slopes SW.; descend 20 ft.
40.00 Set an iron post 3 ft. long 1 in. diam. 28 ins.in ground
for 1/4 sec. cor., with brass cap marked



1928

Raise a mound of stone 3 ft. base 2 ft. high N.of cor.
Descend 80 ft.

50.00 Wash, 25 lks. wide, course SW.; ascend 60 ft.
57.50 Low spur, slopes S.; descend 65 ft.
70.00 Wash, 40 lks. wide, course SW.; ascend 60 ft.

80.00 The cor. of secs. 7,8,17 and 18.


Land: Rolling hills.
Soil: Clayloam, rocky and gravelly, 3d rate.
Timber: Paloverde and ironwood.
Undergrowth: Greasewood, mesquite and cacti.

From the cor. of secs. 7,12,13 and 18, on W.bdy of Tp.,
hereinbefore described.

N.87°40'E. on true line bet. secs. 7 and 18.
Over rolling hills, thru scattering brush and timber.

13.00 Wash, 30 lks. wide, course S.; ascend 200 ft.
14.00 Dim road, bears N. and S.
29.00 Top of ascent, on N. slope of conical hill. Top of hill
bears S., 120 lks. dist.; descend 132 ft. to 1/4 sec. cor.

39.13 Set an iron post 3 ft. long 1 in. diam. 10 ins.in ground
to bedrock, deposit marked (X) stone alongside post,
in a mound of stone, for 1/4 sec. cor., with brass cap
marked



1928

59.00 Wash, 10 lks. wide, course S.; ascend 25 ft.
64.00 Low ridge, bears N. and S.; descend 25 ft.
67.80 Wash, 20 lks. wide, course SE.
76.05 Wash, 5 lks. wide, course SE.

78.26 The cor. of secs. 7,8,17 and 18.

Land: Rolling hills.
Soil: Rocky, clayloam, 3d rate.
Timber: Paloverde and ironwood.
Undergrowth: Greasewood, mesquite and cacti.

Resurvey of the Subdivisions
of

T. 4 S., R. 10 E.

Chains	
	N.2°03'W. on true line bet. secs. 7 and 8. (S $\frac{1}{2}$) Over rolling hills, thru scattering brush and timber. Ascend 25 ft.
12.00	Top of gravel bluff, faces NE.; descend 70 ft.
15.00	Wash, 30 lks. wide, course SE.; continue over rolling land.
39.44	The $\frac{1}{4}$ sec. cor., which is a lava stone, 12x8x3 ins., set in a small mound of stone and marked $\frac{1}{4}$ on W. side. In place of stone cor., which is deposited alongside, Set an iron post 3 ft. long 1 in. diam. 30 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked $\begin{array}{c} \frac{1}{4} \\ S\ 7\ S\ 8 \\ 1928 \end{array}$ Raise a mound of stone 3 ft. base 2 ft. high W. of cor. Thence, N.0°06'W. on true line bet. secs. 7 and 8. (N $\frac{1}{2}$)
2.30	Wash, 25 lks. wide, course SW.
25.30	Wash, 25 lks. wide, course SE.
39.84	The cor. of secs. 5, 6, 7 and 8, which is a lava stone 15x11x7 ins., set in small mound of stone, and unmarked. In place of stone, which is marked with a cross (X) and deposited alongside of post, Set an iron post 3 ft. long 2 ins. diam. 27 ins. in ground for cor. of secs. 5, 6, 7 and 8, with brass cap marked $\begin{array}{c} T\ 4\ S\ R\ 10\ E \\ S\ 6\ S\ 5 \\ \hline S\ 7\ S\ 8 \\ 1928 \end{array}$ Raise a mound of stone 3 ft. base 2 ft. high W. of cor. Land: Rolling hills, and rolling. Soil: Clayloam, rocky, 3d rate. Timber: Ironwood and paloverde. Undergrowth: Greasewood, mesquite and cacti.

	From the cor. of secs. 4, 5, 8 and 9. N.88°33'W. on true line bet. secs. 5 and 8. Over rolling hills, thru scattering brush and timber.
1.00	Low ridge, bears N. and S.; descend 75 ft.
40.00	In wash, 50 lks. wide, course SW. Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground, deposit marked (X) stone alongside of post, for $\frac{1}{4}$ sec. cor., with brass cap marked $\begin{array}{c} \frac{1}{4} S\ 5 \\ \hline S\ 8 \\ 1928 \end{array}$ Raise a mound of stone 3 ft. base 2 ft. high N. of cor.
54.00	Wash, 25 lks. wide, course S.
74.00	Wash, 15 lks. wide, course S.
80.00	The cor. of secs. 5, 6, 7 and 8.

Resurvey of the Subdivisions
of
T. 4 S., R. 10 E.

BOOK 3837

chains


Land: Rolling hills.
Soil: Clayloam, rocky and gravelly, 3d rate.
Timber: Paloverde and ironwood.
Undergrowth: Greasewood, mesquite and cacti.

From the cor. of secs. 1,6,7 and 12, on W.bdy. of Tp.,
hereinbefore described.

N.87°53'E. on true line bet. secs. 6 and 7.
Over rolling land, thru scattering timber and brush.

29.50 Draw, course S.10°W.; ascend 20 ft.
32.20 Continue over level land.

38.19 Set an iron post 3 ft. long 1 in. diam. 27 ins. in ground
for 1/4 sec. cor., with brass cap marked



1928

Raise a mound of stone 2 ft. base 1 1/2 ft. high N. of cor.

39.00 Dim road, bears NW. and SE.
43.00 Leave level land, descend 70 ft. over NE. slope.
48.00 Continue over broken and nearly level land.

76.96 The cor. of secs. 5,6,7 and 8.


Land: Rolling and level.
Soil: Clayloam, rocky and gravelly, 3d rate.
Timber: Paloverde and ironwood.
Undergrowth: Greasewood, mesquite and cacti.

N.0°02'W. on true line bet. secs. 5 and 6. (S 1/2.)
Over rolling land, thru scattering brush and timber.

3.80 Dim road, bears NW. and SE.
16.70 Dim road, bears NE. and SW.
23.80 Wash, 10 lks. wide, course SE.; ascend 85 ft.

40.74 The 1/4 sec. cor., which is a lava stone 14x12x8 ins.,
set in a small mound of stone and marked 1/4 on W. side.
In place of stone cor., which is deposited alongside post,

Set an iron post 3 ft. long 1 in. diam. 18 ins. in ground
to bedrock, in a mound of stone for 1/4 sec. cor., with
brass cap marked



1928

Thence, N.0°52'E. on true line bet. secs. 5 and 6. (N 1/2.)

Descend 45 ft. over NE. slope.
17.00 Wash, 20 lks. wide, course E.; continue over rolling land.
32.00 Dim road, bears NE. and SW.

37.03 The cor. of secs. 5,6,31 and 32, on N.bdy. of Tp., here-
inbefore described.

Land: Rolling. Soil: Clayloam, rocky, 3d rate.
Timber: Paloverde and ironwood.
Undergrowth: greasewood, mesquite and cacti.

chains

The continued satisfactory adjustment of the solar apparatus of the instruments used in the execution of the resurveys described in the foregoing notes is indicated from field tests of said instruments described in Books "E" and "F" of this group.

GENERAL DESCRIPTION

This township is situated in the valley of the Gila River, said river having its course, SW., practically thru the center of the township. The surface in the SE $\frac{1}{4}$ is generally rolling and slightly broken, north of the river is mostly broken hills, while the immediate valley of the river is bottom land, subject to overflow in stormy periods.

The drainage is all into the Gila River, northwesterly from the SE $\frac{1}{4}$ and southerly from the northern part of the township. The new Florence-Casa Grande and the old Florence Canals have a course southwesterly thru the township and lie entirely south of the Gila River. Water in the Gila River is underground except at intermittent points, and in stormy periods.

The soil is a clayloam, quite rocky, with a subsoil of hard pan or even bedrock, and except for the bottom land of the Gila River, which is sandy loam and 2d rate, can be generally classified as third rate soil.

Timber is scattering thruout the township and consists of paloverde and ironwood in the rolling land, and cottonwoods along the river bottom. Undergrowth is greasewood, scattering mesquite and cacti

Land cleared or under cultivation is around the cor. of secs. 10, 11, 14 and 15, and parts of secs. 20, 21, 28, 29, 30, 31 and 32. All of this land is in the level valley S. of the Gila River wash.

There are no indications of mineral activity.

A county improved road runs thru the township, approximately parallel to the Old Florence Canal, bears SW. to Florence and NE. to the Ashurst diversion dam and points along the Gila River. An improved road bears N. to the highway and S. to north side of Gila River, thru secs. 3, 11 and 12.

BOOK 3837

4-680

FIELD ASSISTANTS.

NAMES.	CAPACITY.
<u>To Dupree R. Averill</u>	
Frank Burgess	First chairman
Dave Cummins	Second chairman
Cecil Emmons	Flagman
Elliott Pierson	Cornerman
<u>To Roger F. Wilson</u>	
Howard Beard	First chairman
Robert Depue	Second chairman
Ben Randall	Flagman
Clair Pierson	Cornerman
<u>To Otis O. Gould</u>	
Fred Pender	First chairman
Earl Endicott	Second chairman
Glenn Thomas	Flagman
Mark Anderson	Axman
M.E. Brassfield	Cornerman

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Roger F. Wilson U.S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer, for Group 150, Arizona bearing date of the 5th day of January, 1928, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of

the Subdivision Lines of

Township 4 South, Range 10 East of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer, for Group 150, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place: Phoenix, Arizona.

Date: June 2, 1928.

Roger F. Wilson U.S. Transitman.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

10

The foregoing field notes of the survey of

executed by

under his special instructions dated, 19, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above described surveys in, has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.

BOOK 3837

4-680

FIELD ASSISTANTS.

NAMES.	CAPACITY.
<i>See Page 61 hereof.</i>	

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Otis O. Gould U.S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer, for Group 150, Arizona bearing date of the 5th day of January, 1928, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the East Boundary North Boundary West Boundary and Subdivision Lines of Township 4 South, Range 10 East of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer, for Group 150, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place: Phoenix, Arizona.

Date: May 12, 1928.

[Signature of Otis O. Gould] U.S. Transitman

APPROVAL

OFFICE OF THE UNITED STATES SURVEYOR GENERAL

19

The foregoing field notes of the survey of

executed by

under his special instructions dated, 19, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U.S. Surveyor General

I certify that the foregoing transcript of the field notes of the above described surveys in

has been correctly copied from the original notes on file in this office.

U.S. Surveyor General

4-680

FIELD ASSISTANTS.

NAMES.	CAPACITY.
<i>See Page 61 hereof</i>	

BOOK 3837

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Dupree R. Averill, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer, for Group 150, Arizona bearing date of the 5th day of January, 1928, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, ^{re} surveyed all those parts or portions of _____

the South Boundary

West Boundary

and


Subdivision Lines of

Township 4 South, Range 10 East of the Gila and Salt

River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said ^{re} survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer, for Group 150, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such ^{re} survey.

Place: Phoenix, Arizona.

Date: May 14, 1928.

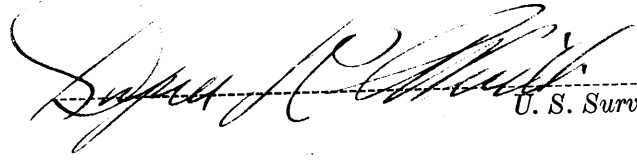

U. S. Surveyor.

APPROVAL.

OFFICE OF U.S. SUPERVISOR OF SURVEYS,

Denver, Colo., JUL 15 1928, 192

The foregoing field notes of the ^{re} survey of the South boundary,

East boundary, North boundary

West boundary and

Subdivision Lines of


Township 4 South, Range 10 East

of the Gila and Salt River Base and Meridian, in the State of Arizona,

executed by Dupree R. Averill, U.S. Surveyor

assisted by Roger F. Wilson, and Otis O. Gould, U.S. Transitmen

under special instructions dated January 5, 1928 for Group 150, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the ^{re} surveyers they describe, are hereby approved.

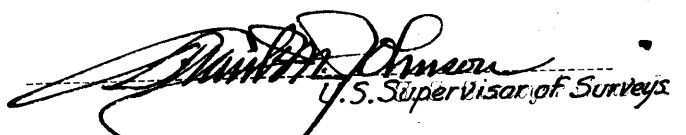

U. S. Supervisor of Surveys

~~I certify that the foregoing transcript of the field notes of the above described surveys in _____, has been correctly copied from the original notes on file in this office.~~

U. S. Surveyor General.