

# FIELD NOTES.

OF THE RESURVEY OF

West Boundary

North Boundary

and

Subdivision Lines of

Township 4 South Range 9 East

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

### EXECUTED BY

Roger F. Wilson, U.S. Transitman

and

Otis O. Gould U.S. Transitman

In the capacity of U. S. Surveyors, under Special Instructions dated January 5, 1928, issued by the District Cadastral Engineer to govern surveys included in Group No. 150 Arizona, which were approved by the Commissioner of the General Land Office, January 17, 1928, and Assignment Instructions dated February 1, 1928.


Resurvey commenced March 5, 1928.

Resurvey completed March 13, 1928.

3838

# INDEX DIAGRAM.

*Township* \_\_\_\_\_, *Range* \_\_\_\_\_

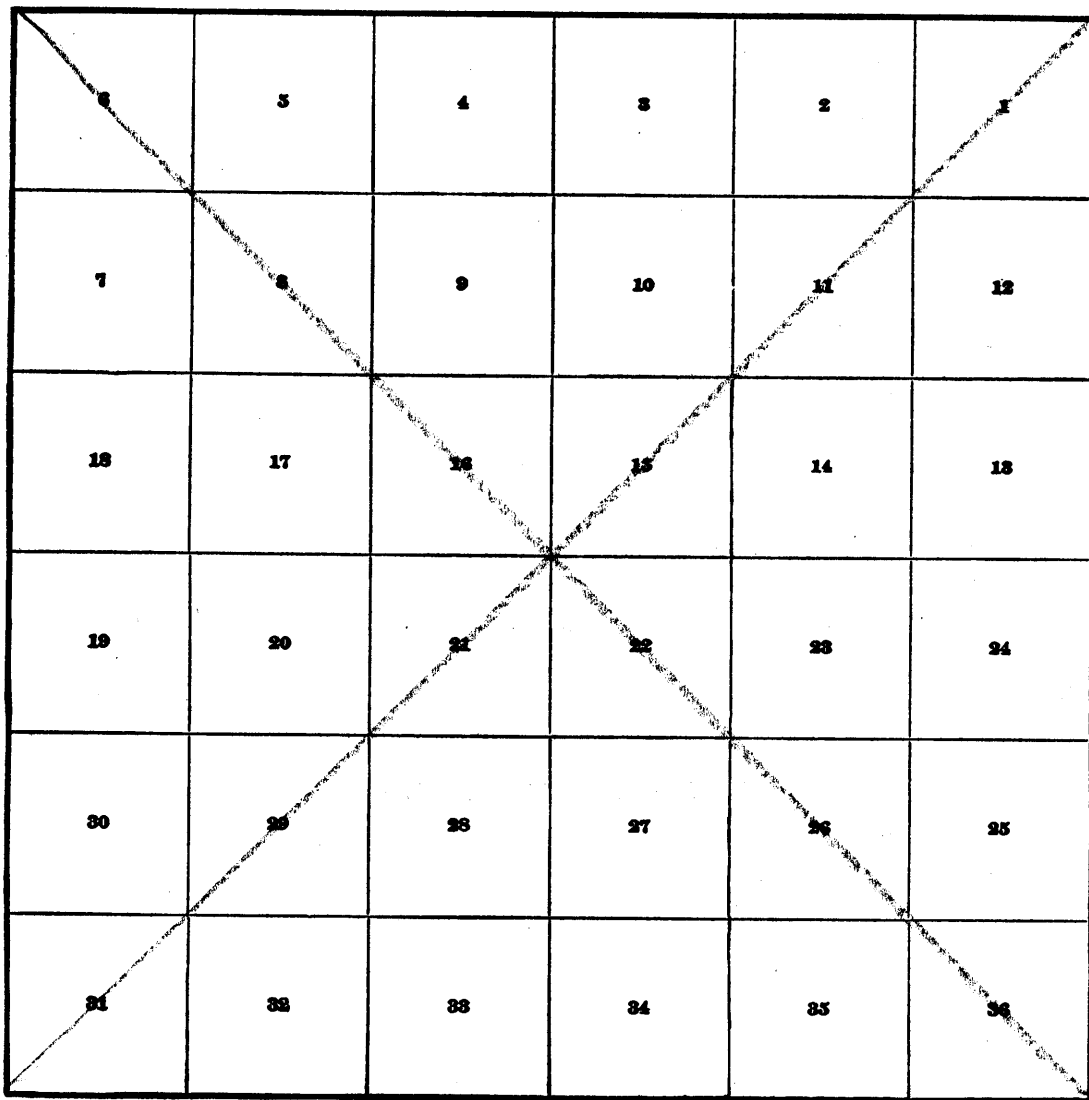


T.1S.-R.9E. T.1S.-R.10E.  
36 31  
T.2S.-R.9E. T.2S.-R.10E.

1A

Book "E"  
Group 150 Arizona  
Township 4 South Range 9 East

INDEX DIAGRAM

BOOK 3838

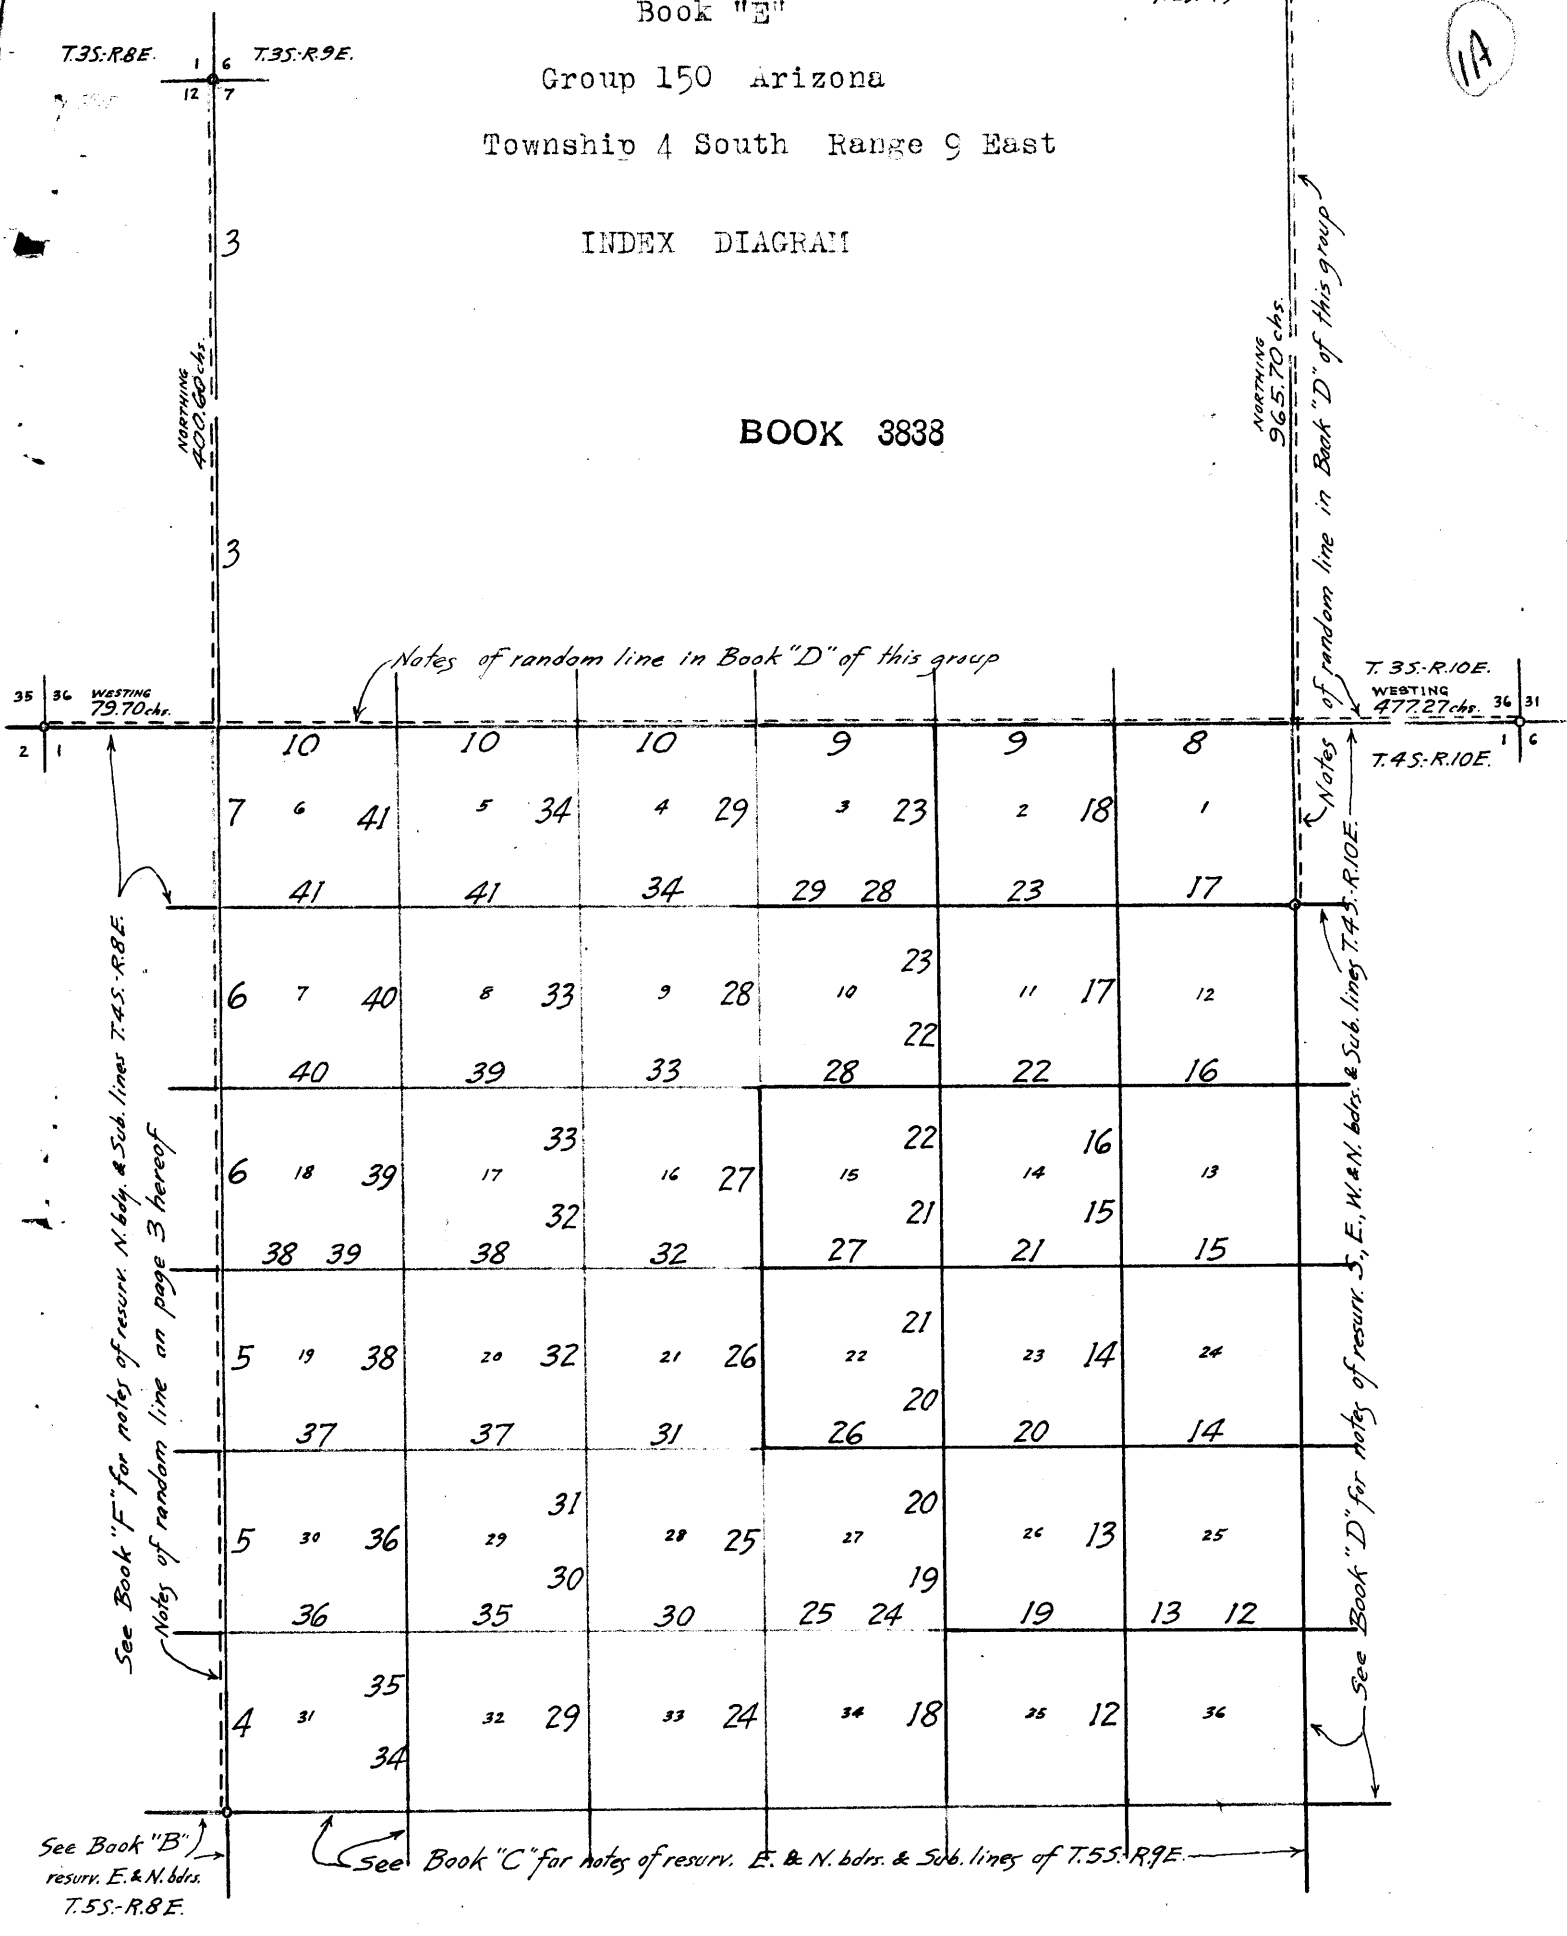

- Resurveyed by Dupree R. Averill, U.S. Surveyor under instructions Group 150.
- Resurveyed by Roger F. Wilson, U.S. Transitman under instructions Group 150.
- Resurveyed by Otis O. Gould, U.S. Transitman under instructions Group 150.
- - - Random Tp. bdrs run by Otis O. Gould to determine points for reestablishment of the NE. & NW. cors. of T.4S.-R.9E. No intermediate cors. found on these lines.
- Accepted surveys, resurveys and retracements.

The resurveys herein described were commenced March 5, 1928, and executed by Roger F. Wilson and Otis O. Gould, U.S. Transitmen, using Buff solar transits Nos. 9984 and 10125, respectively. The instruments are equipped with Smith solar attachments and otherwise conform to the standard requirements of the General Land Office. Unless otherwise specified all azimuth determinations are accomplished with the solar attachment.

PRELIMINARY FIELD TEST  
of  
Buff transit No. 9984  
by  
Roger F. Wilson, U.S. Transitman

March 4, 1928: at the station described on page 1 of Book C, near the center of sec. 36, T.4 S., R.9 E., G. and S.R. Base and Meridian, Arizona, latitude  $33^{\circ}02'$  N. and longitude  $111^{\circ}22\frac{1}{2}'$  W., examine the adjustments of the instrument and find no errors; then to test the workings of the solar apparatus proceed as follows:

At 9h 0m a.m., app.t., set off  $33^{\circ}02'$  on the latitude arc;  $6^{\circ}19\frac{1}{2}'$  S. on the declination arc and determine a meridian with the solar which agrees with the true meridian.

At app. noon, with the latitude arc unchanged, observe the sun on the meridian; the resultant reading of the declination arc is  $6^{\circ}17'$  S., which agrees with the computed declination of the sun.

At 3h 0m p.m., app.t., with the latitude arc unchanged, set off  $6^{\circ}14'$  S. on the declination arc and determine a meridian with the solar which agrees with the true meridian.

As all of the observations taken during the usual hours of solar work agree within 1' of the true meridian, conclude that the instrument is in adjustment.

The measurements are made on the slope, the vertical angles determined with a clinometer and the slope measurements properly reduced to true horizontal distances.

PRELIMINARY FIELD TEST  
of  
Buff transit No. 9984  
by  
Otis O. Gould, U.S. Transitman.

March 4, 1928: at the same station, near the center of sec. 36, T.4 S., R.9 E., G. and S.R. Base and Meridian, Arizona, latitude  $33^{\circ}02'$  N. and longitude  $111^{\circ}22\frac{1}{2}'$  W., examine the adjustments of the instrument and find no errors; then to test the workings of the solar apparatus proceed as follows:

At 9h 0m a.m., app.t., set off  $33^{\circ}02'$  on the latitude arc,  $6^{\circ}19\frac{1}{2}'$  S. on the declination arc and determine a meridian with the solar which agrees with the true meridian.

At app. noon, with the latitude arc unchanged, observe the sun on the meridian; the resultant reading of the declination arc is  $6^{\circ}17'$  S., which agrees with the computed declination.

At 3h 0m p.m., app.t., with the latitude arc unchanged, set off  $6^{\circ}14'$  S. on the declination arc and determine a meridian with the solar which agrees with the true meridian.

As all of the observations taken during the usual hours of solar work agree within 1' of the true meridian, conclude that the instrument is in adjustment.

All measurements are made on the slope, the vertical angles determined with a clinometer and the slope measurements properly reduced to true horizontal distances.

All measurements are made with Lallie steel tapes 5 chs. in length, compared with a Lufkin standard and found correct.

Resurvey of the West Boundary  
of  
T. 4 S., R. 9 E.

BOOK 2888

The west boundary of this township was surveyed by R.W. Norris, U.S.D.S., in 1869, in connection with his surveys of exteriors which included the line bet. Rs.8 and 9 E., thru Ts.1,2 and 3 S.

In 1884, A.E. Shoemaker, U.S.D.S., reestablished the cor. of Ts.3 and 4 S., Rs.8 and 9 E., in connection with his resurveys of the boundaries of T.3 S., R.8 E.

In 1914, Sidney E. Blout, U.S.S., retraced the S. and E. boundaries of T.3 S., R.8 E., in connection with his resurveys of the boundaries of T.2 S., R.8 E., at which time he found no trace of the cor. of Ts.3 and 4 S., Rs.8 and 9 E.

There is no other retracement or resurvey of the west boundary of this township, of record.

The following notes describe a reestablishment by double proportion, of the missing cor. of Ts.3 and 4 S., Rs.8 and 9 E., and a dependent resurvey of the entire boundary bet. Rs.8 and 9 E., thru T.4 S., reestablishing thereon at intervals proportional to the record, all sec. and 1/4 sec. cors., common to both townships.

-----  
Retracement for Resurvey  
-----

From the cor. of Ts.4 and 5 S., Rs.8 and 9 E., described in book "B".

North on a random line bet. Rs.8 and 9 E., thru T.4 S., setting temp. cors. at record intervals and making diligent but futile search for orig. cors. at such distances.


479.04 Fall 5.55 chs. E. of the temp. cor. (B) of Ts.3 and 4 S., Rs.8 and 9 E., described in Book "D".

480.00 Find no trace of the cor. of Ts.3 and 4 S., Rs.8 and 9 E. Set temp. cor. (D).

Thence, north on a trial range line bet. Rs.8 and 9 E., thru T.3 S., making diligent but futile search for orig. cors., at record intervals.

401.32 Fall 8.00 chs. E. of the cor. of secs. 1,6,7 and 12, which is an old mesquite stake, 2 ins. sq., 12 ins. above ground, badly decayed and with no scribe marks visible. Evidence of orig. pits, NE., SE., SW. and NW. of cor., and a mound of earth W. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground, deposit marked (X) stone alongside post, for cor. of secs. 1,6,7 and 12, T.3 S., Rs.8 and 9 E., with brass cap marked



Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

-----  
The point for reestablishment of the cor. of Ts.3 and 4 S., Rs.8 and 9 E., determined by the random lines described in book "D", and hereinbefore, is therefore at 3.60 chs. E. of temp. cor. (B) and .72 chs. N. of temp. cor. (D)

Resurvey of the West Boundary  
of

T. 4 S. R. 9 E.

chains

The resulting bearings and lengths of the Tp. bdys. extending E., W., S. and N. from this reestablished Tp. cor. point are:

N. bdy. T. 4 S., R. 9 E.;                    S. 89°42'E., 477.70 chs.  
N. bdy. sec. 1 T. 4 S., R. 8 E.        S. 88°30'W., 79.73 chs.  
W. bdy. T. 4 S., R. 9 E.,                S. 0°14'E., 480.72 chs.  
and S. 5 m. of W. bdy. of T. 3 S., R. 9 E.    N. 0°52'W., 400.64 chs.

Resurvey

From the cor. of Ts. 4 and 5 S., Rs. 8 and 9 E., described in book "B".

N. 0°14'W. on true line bet. secs. 31 and 36.

Over level land, thru desert growth. An unimproved road, power line and fence extending N. and S., bear W., 10 lks. to 1 ch. dist. Land to W. is under cultivation.

- .40 An unimproved road bears E. from N. and S. road.  
9.50 Irrigation ditch, 8 lks. wide, course W.  
40.06 Set an iron post 3 ft. long 1 in. diam. 44 ins. in ground on unimproved road, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
 S 36 | S 31  
 1928

At points N. 45°W. and S. 45°E., 64 lks. dist., set similar iron posts, 33 ins. in ground, for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.

The railroad station at Parsons bears N. 9°E.

A ranch house bears S. 80°W.

A school house bears N. 7 $\frac{1}{2}$ °W.

- 41.15 Cor. of fences extending N., S. and W. bears W., 40 lks. dist.  
41.20 Irrigation ditch, 8 lks. wide, course W.

- 80.12 Set an iron post 3 ft. long 2 ins. diam. 44 ins. in ground on unimproved road, for cor. of secs. 25, 30, 31 and 36, with brass cap marked

T 4 S  
 R 8 E | R 9 E  
 S 25 | S 30  
 S 36 | S 31  
 1928

At points N. 45°W. and S. 45°E., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground, for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.

The ranch house bears S. 19°W.

The school house bears S. 6 $\frac{1}{2}$ °W.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood and mesquite. Sec. 36 is under cultivation.

Resurvey of the West Boundary  
of  
T. 4 S., R. 9. E.


BOOK 3888

chains

N.0°14'W. on true line bet. secs. 25 and 30.  
Over level land, along unimproved road, bears N. and S.,  
thru scattering brush.


The railroad station at Parsons bears N.49°E., about  
8 chs. dist. from cor. of secs. 25,30,31 and 36.

- .40 Power line, extends E. and W.; cor. pole of power line  
extending E. and S. bears W., 20 lks. dist.
- .79 Cor. of fences extending S. and E. bears E., 59 lks. dist.;  
cor. of fences extending S. and SW. bears W., 39 lks. dist.
- 1.10 Hunt Highway, bears N.65°05'E. to Florence and S.65°05'W.  
to Phoenix.
- 2.52 Ariz. Eastern R.R., bears N.65°05'E. and S.65°05'W.
- 4.00 Unimproved roads extend W. and NE., from S.; continue  
over level land, thru scattering brush.
- 26.10 Old winding road, bears NE. and SW.
- 40.06 Set an iron post 3 ft. long 1 in. diam. 30 ins. in ground  
for 1/4 sec. cor., with brass cap marked



Raise a mound of stone 2 1/2 ft. base 1 1/2 ft. high W. of cor.

- 80.12 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground  
for cor. of secs. 19,24,25 and 30, with brass cap marked




Raise a mound of stone 2 ft. base 1 1/2 ft. high W. of cor.

Land: Level.  
Soil: Clayloam, gravelly, 1st and 2d rate.  
No timber.  
Undergrowth: Greasewood, mesquite and cacti.


N.0°14'W. on true line bet. secs. 19 and 24.  
Over level land, thru desert growth.

- 40.06 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground  
for 1/4 sec. cor., with brass cap marked



Raise a mound of stone 2 ft. base 1 1/2 ft. high W. of cor.

- 64.60 Old winding road, bears N.10°W. and S.10°E.
- 80.12 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground  
for cor. of secs. 13,18,19 and 24, with brass cap marked





6.

Resurvey of the West Boundary  
of  
T. 4. S., R. 9. E.

chains

Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Land: Level.

Soil: Clayloam, gravelly, 2d and 3d rate.

No timber.

Undergrowth: Greasewood, mesquite and cacti.

N.0°14'W. on true line bet. secs. 13 and 18.  
Over level land, thru desert growth.

8.60 Foot of low lava hills, bears E. and W.; continue over rolling and rocky land.

40.06 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 13 \text{ | S } 18 \\ \text{1928} \end{array}$$

Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

62.55 Summit of low lava ridge, bears NW. and SE.; descend.

80.12 Set an iron post 3 ft. long 2 ins. diam. 3 ins. in ground to bedrock, place a marked (X) stone alongside post, in a mound of stone 7 ft. base 2 $\frac{1}{2}$  ft. high, for cor. of secs. 7, 12, 13 and 18, with brass cap marked

$$\begin{array}{c} \text{T } 4 \text{ S} \\ \text{R } 8 \text{ E | R } 9 \text{ E} \\ \text{S } 12 \text{ | S } 7 \\ \text{S } 13 \text{ | S } 18 \\ \text{1928} \end{array}$$

Land: Level and rolling hills.

Soil: Clayloam and rocky; 3d rate.

No timber.

Undergrowth: Greasewood, mesquite and cacti.

N.0°14'W. on true line bet. secs. 7 and 12.  
Over rolling land, thru desert growth.

34.00 Foot of low lava hills, bears N.60°W. and S.60°E., continue over level land.

40.06 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 12 \text{ | S } 7 \\ \text{1928} \end{array}$$

Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$  ft. high W. of cor.

80.12 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for cor. of secs. 1, 6, 7 and 12, with brass cap marked

$$\begin{array}{c} \text{T } 4 \text{ S} \\ \text{R } 8 \text{ E | R } 9 \text{ E} \\ \text{S } 1 \text{ | S } 6 \\ \text{S } 12 \text{ | S } 7 \\ \text{1928} \end{array}$$

Resurvey of the West Boundary

of

T. 4 S., R. 9 E.

BOOK 3888

chains

Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Land: Rolling and level.  
Soil: Rocky, gravelly and clayloam, 3d and 2d rate.  
No timber.  
Undergrowth: Greasewood, mesquite and cacti.

N.0°14'W. on true line bet. secs. 1 and 6.  
Over level land, thru desert growth.

3.02 Telegraph line, bears N.39°W. and S.39°E.

4.04 Old Phoenix and Eastern R.R., bears N.38°58'W. and  
S.38°58'E. to Florence.

40.06 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground  
for 1/4 sec. cor., with brass cap marked

1/4  
S 1 | S 6  
1928

Raise a mound of stone 3 ft. base 1 1/2 ft. high W. of cor.

80.12 Set an iron post 3 ft. long 3 ins. diam. 33 ins. in ground  
for cor. of Ts. 3 and 4 S., Rs. 8 and 9 E., with brass  
cap marked

T 3 S  
R 8 | E R 9 E  
S 36 | S 31  
S 1 | S 6  
T 4 S

1928

Raise a mound of stone 3 ft. base 2 ft. high S. of cor.

Land: Level.  
Soil: Clayloam, gravelly, 2d rate.  
Timber: None.  
Undergrowth: Greasewood, mesquite and cacti.

Resurvey of the North Boundary  
of  
T. 4 S., R. 9. E.

chains

The north boundary of this township was surveyed by R.W. Norris, U.S.D.S., in 1869.

There is no retracement or resurvey of this boundary, of record.

The retracement of the north boundary of this township, to reestablish the cor. of Ts.3 and 4 S., Rs.9 and 10 E., has been described in book "D" of this group.

The following notes describe a dependent resurvey of the boundary bet. Ts.3 and 4 S., thru R.9 E., with reestablishment thereon at intervals proportional to the record, all sec. and  $\frac{1}{4}$  sec. cors., common to both townships.

-----  
Resurvey  
-----

From the cor. of Ts.3 and 4 S., Rs.9 and 10 E., described in Book "D".

N.89°42'W. on true line bet. secs. 1 and 36.  
Over level land, thru desert growth.

39.85 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

$$\begin{array}{r} \text{S } 36 \\ \hline \frac{1}{4} \text{ S } 1 \end{array}$$

1928

At points N.45°W. and S.45°E., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest the true cor.

79.70 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for cor. of secs. 1, 2, 35 and 36, with brass cap marked

$$\begin{array}{r} \text{T } 3 \text{ S } \text{ R } 9 \text{ E} \\ \text{S } 35 \text{ | } \text{S } 36 \\ \hline \text{S } 2 \text{ | } \text{S } 1 \\ \text{T } 4 \text{ S } \end{array}$$

1928

At points N.45°W. and S.45°E., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground, for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.

Land: Level.

Soil: Clayloam, gravelly, 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and cacti.

Resurvey of the North Boundary  
of


T. 4 S., R. 9 E.

BOOK 222

chains

N.89°42'W. on true line bet. secs. 2 and 35.  
Over level land, thru brush.


39.85 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground  
for 1/4 sec. cor., with brass cap marked



1928

Raise a mound of stone 2 ft. base 1 1/2 ft. high N. of cor.

79.70 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground  
for cor. of secs. 2, 3, 34 and 35, with brass cap marked



1928


Raise a mound of stone 2 ft. base 1 1/2 ft. high W. of cor.

Land: level.  
Soil: Clayloam and hardpan, 2d rate. No rocks.  
Timber: None.  
Undergrowth: Greasewood, mesquite and cacti.

N.89°42'W. on true line bet. secs. 3 and 34.  
Over level land, thru desert growth.

1.05 Telephone line, bears N.25°W. and S.25°E.  
2.00 in winding road, bears NW. and SE.


39.85 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground  
for 1/4 sec. cor., with brass cap marked



1928

Raise a mound of stone 2 ft. base 1 1/2 ft. high N. of cor.

79.70 Set an iron post 3 ft. long 2 ins. diam. 34 ins. in ground  
for cor. of secs. 3, 4, 33 and 34, with brass cap marked



1928

Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Land: level.  
Soil: Clayloam, 2d rate. No rocks.  
Undergrowth: Greasewood, mesquite and cacti.  
No timber.

Resurvey of the North Boundary  
of

T. 4 S., R. 9. E.

chains

N.89°42'W. on true line bet. secs. 4 and 33.  
Over level land, thru desert growth.

39.85 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground  
for  $\frac{1}{4}$  sec. cor., with brass cap marked

$$\frac{1}{4} \frac{S \ 33}{S \ 4}$$

1928

Raise a mound of stone 2 ft. base  $1\frac{1}{2}$  ft. high N. of cor.

79.70 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground  
for cor. of secs. 4, 5, 32 and 33, with brass cap marked

$$\begin{array}{c} T \ 3 \ S \ R \ 9 \ E \\ S \ 32 \ | \ S \ 33 \\ \hline S \ 5 \ | \ S \ 4 \\ T \ 4 \ S \end{array}$$

1928

Raise a mound of stone 2 ft. base  $1\frac{1}{2}$  ft. high W. of cor.

Land: Level.

Soil: Clayloam, 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and cacti.

N.89°42'W. on true line bet. secs. 5 and 32.  
Over level land, thru desert growth.

39.85 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground  
for  $\frac{1}{4}$  sec. cor., with brass cap marked

$$\frac{1}{4} \frac{S \ 32}{S \ 5}$$

1928

Raise a mound of stone, 2 ft. base  $1\frac{1}{2}$  ft. high N. of cor.

79.70 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground  
for cor. of secs. 5, 6, 31 and 32, with brass cap marked

$$\begin{array}{c} T \ 3 \ S \ R \ 9 \ E \\ S \ 31 \ | \ S \ 32 \\ \hline S \ 6 \ | \ S \ 5 \\ T \ 4 \ S \end{array}$$

1928

Raise a mound of stone 2 ft. base  $1\frac{1}{2}$  ft. high W. of cor.

Land: Level. Soil: Clayloam, 2d rate.

Timber: None. Undergrowth: greasewood and mesquite.

N.89°42'W. on true line bet. secs. 6 and 31.  
Over level land, thru desert growth.

39.85 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground  
for  $\frac{1}{4}$  sec. cor., with brass cap marked

$$\frac{1}{4} \frac{S \ 31}{S \ 6}$$

1928

79.20 Raise a mound of stone 2 ft. base  $1\frac{1}{2}$  ft. high N. of cor.  
The cor. of Ts 3 and 4 S., Rs. 8 and 9 E., hereinbefore  
Land; level. Soil; clayloam, 2d rate. (described.  
timber; none. undergrowth; mesquite and greasewood.

Chains

Boundaries of Township 4 South, Range 9 East.

Latitudes, departures and closing errors.

Line designated	True course	Distance	Latitudes		Departures	
			N.	S.	E.	W.
South Boundary	N.89°51'W.	477.52	1.25			477.52:
West Boundary	N.0°14'W.	480.72	480.72			1.95:
North Boundary	S.89°42'E.	477.70		2.52	477.70	:
East Boundary	S.0°52'E.	80.44		80.44	1.22	:
	S.0°11'E.	39.77		39.77	.13	:
	S.0°15'E.	39.96		39.96	.17	:
	S.0°06'E.	319.76		319.76		.56:
Convergency					.47	:
Totals			481.97	482.45	479.69	480.03:
				481.97		479.69:
Error in Latitude			: 0.48			:
Error in Departure					: 0.34:	

Resurvey of the Subdivisions  
of  
T. 4 S., R. 9 E.

chains

The subdivisional lines of this township were surveyed by R.W. Norris, U.S.D.S., in 1869.

There is no other resurvey or retracement of subdivisional lines in this township, of record.

The following notes describe a dependent resurvey of the subdivisional lines of T.4 S., R.10 E., with remonumentation of orig. cors. and reestablishment of lost cors. by proportion or by collateral evidence.

From the point for cor. of secs. 1,2,35 and 36, on S. Bdy. of Tp., described in Book "C".

N.0°09'E. on true line bet. secs. 35 and 36.  
Along the W. side of the Main Street of Florence, thru business section. The Main Street is on Highway No.80.

26.00 Right angle turn in Highway No.80, bears E. to Phoenix and S. thru Florence, to Tucson. Leave business section of Florence, continue over fields and yards.

39.83 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground, deposit marked (X) stone alongside post, for  $\frac{1}{4}$  sec.cor., with brass cap marked

$\frac{1}{4}$   
S 35 | S 36  
1928

Continue along old N. and S. fence line, now nearly obliterated by extension of Florence sewage system.

78.00 N. end of sewage system, bears N. and S. between fields. Continue over bottom land.

79.66 Point for cor. of secs. 25,26,35 and 36, determined from collateral evidence, I.E., intersection of old line fences, now nearly obliterated, extending S., E. and W.

Set an iron post 3 ft. long 2 ins. in diam. 34 ins. in ground, for cor. of secs. 25,26,35 and 36, with brass cap marked

T 4 S R 9 E  
S 26 | S 25  
S 35 | S 36

1928

Deposit a marked (X) stone alongside of post, at base.

Land: Level

Soil: Clayloam and sandy, 1st and 2d rate.

Timber: None.

Undergrowth: Soapweed, greasewood and mesquite.

From the cor. of secs. 25,30,31 and 36, on E.bdy. of Tp., described in book "D".

West on true line bet. secs. 25 and 36.  
Over level land, along fence line between fields.


35.50 A ranch house bears N., 4 chs. dist.

Resurvey of the Subdivisions  
of  
T. 4 S., R. 9 E.

BOOK 8588

chains

40.06 Point for  $\frac{1}{4}$  sec. cor., determined from Property fence,  
extends N. and S.,  
Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground,  
deposit a marked (X) stone alongside post, at base, for  
 $\frac{1}{4}$  sec. cor., with brass cap marked



1928

Power line extends N. and S. along fence line.

40.51 Center line of highway No. 80, bears N. to Phoenix and  
S. to Florence.

40.96 Fence, extends S. and W.; continue along fence line, cult-  
ivated land in sec. 36, only.

79.96 The cor. of secs. 25, 26, 35 and 36.

Land: Level.  
Soil: Clayloam, 1st rate.  
Timber: Cottonwoods.  
Undergrowth: Sage and greasewood in SW $\frac{1}{4}$  sec. 25.

N.0°13'E. on true line bet. secs. 25 and 26.  
Over level bottom land, thru sage and soapweed.

72.10 Enter Gila River wash, bears NE. and SW. 70°.  
39.83 Set an iron post 3 ft. long 1 in. diam. 36 ins. in ground,  
deposit marked (X) stone alongside post, at base, for  
 $\frac{1}{4}$  sec. cor., with brass cap marked



1928

44.00 Fence, extends N.85°E. and S.85°W.

44.75 Ditch, 15 lks. wide, course W.

48.50 Leave Gila River wash, (dry) bears NE. and SW.; continue  
over nearly level land, across small field.


54.50 Hunt Highway, bears NE. to Florence and SW. to Phoenix.  
Leave small field, continue thru desert growth.

58.65 A railroad section hand house, on line.

60.00 Ariz. Eastern R.R., on curve, bears W. and NE. Florence  
station house bears NE. about 8 chs. dist. Group of R.R.  
houses bears E. and NE., 2 to 10 chs. dist.

79.50 Yard fence of abandoned homsite, extends E. and W.

79.66 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground,  
for cor. of secs. 23, 24, 25 and 26, with brass cap marked



1928

Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$  ft. high W. of cor.

Land: Level and nearly level.  
Soil: Clayloam, 1st and 2d rate.  
No timber.  
Undergrowth: Greasewood, sage, soapweed and mesquite.



Resurvey of the Subdivisions

of

T. 4 S., R. 9 E.

chains

From the cor. of secs. 19, 24, 25 and 30, On E. bdy. of Tp., described in Book "D".

S. 89° 35' W. on true line bet. secs. 24 and 25. Over level land, thru scattering brush.

38.50 Fence, encloses Standard Oil Warehouse building, extends S. and N., 15 lks., thence W.

39.56 NW. cor. of Standard Oil Warehouse building bears S., 17 lks. dist.

39.68 Fence, extends N. and S.; cor. of fences extending E. and S., about warehouse building, bears W., 13 lks. dist.

39.88 Set an iron post 3 ft. long 1 in. diam. 36 ins. in ground for 1/4 sec. cor., with brass cap marked

S 24  
1/4 S 25

1928

At points N. 45° E. and S. 45° W., .64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest the true corner.

40.62 Center line of highway No. 80, bears N. to Phoenix and S. to Florence. Continue over nearly level land.

46.50 Telegraph and telephone lines, bears N. 57 1/4° E. and S. 57 1/4° W.

47.51 Ariz. Eastern R.R., bears N. 57° 15' E. and S. 57° 15' W.

78.16 Fence, extends N. and S.; cor. of fences extending N. and W. bears S., 12 lks. dist.

79.76 The cor. of secs. 23, 24, 25 and 26.

Land: Level and nearly level.

Soil: Clayloam, sandy, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite, sage and cacti.

N. 0° 01' E. on true line bet. secs. 23 and 24. Over nearly level land, thru brush.

2.00 A deserted shack bears W., 2.50 chs. dist.

28.50 Old well bears E., 10 lks. dist.

33.10 Fence, extends E. and W.; cor. of fences extending W. and S. bears E., 1.50 chs. dist.

39.83 Set an iron post 3 ft. long 1 in. diam. 30 ins. in ground for 1/4 sec. cor., with brass cap marked

1/4  
S 23 | S 24

1928

68.00 Raise a mound of stone 2 ft. base 1 1/2 ft. high W. of cor. Foot of rolling land, bears E. and W.; ascend 20 ft.

79.66 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for cor. of secs. 13, 14, 23 and 24, with brass cap marked

T 4 S R 9 E  
S 14 | S 13  
S 23 | S 24

1928

Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Resurvey of the Subdivisions  
of  
T. 4 S., R. 9 E.

BOOK 8088

chains


Land: Nearly level and rolling.  
Soil: Clayloam, and rocky, 2d and 3d rate.  
Timber: None.  
Undergrowth: Greasewood, mesquite and cacti.

-----  
From the cor. of secs. 13, 18, 19 and 24, on E. bdy. of Tp.,  
described in Book "D".

S. 89° 26' W. on true line bet. secs. 13 and 24.  
Over nearly level land, thru brush and scattering timber.

- 3.40 Wash, 15 lks. wide, course SW.
- 9.30 Wash, 20 lks. wide, course SW.
- 11.60 Wash, 20 lks. wide, course S. 20° E.
- 31.90 Old road, unimproved, bears N. and S.
- 34.70 Old road, unimproved, bears N. and S.

39.91 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground  
for 1/4 sec. cor., with brass cap marked



1928

Raise a mound of stone 2 ft. base 1 1/2 ft. high N. of cor.

40.75 Center line of highway No. 80, bears N. to Phoenix and  
S. to Florence.

51.00 Foot of rolling land, bears NE. and SW.

79.82 The cor. of secs. 13, 14, 23 and 24.


Land: Nearly level and rolling.  
Soil: Clayloam, rocky and gravelly, 2d and 3d rate.  
Timber: Paloverde and ironwood.  
Undergrowth: Greasewood, mesquite and cacti.

-----  
N. 0° 45' E. on true line bet. secs. 13 and 14. (S 1/2.)  
Over rolling land, thru scattering brush and timber.

- .50 Old road on low ridge, bears NE. and SW.
- 3.20 Wash, 15 lks. wide, course W.
- 8.10 Wash, 14 lks. wide, course S. 80° W.
- 18.70 Wash, 15 lks. wide, course S. 70° W.
- 30.00 Low ridge, bears N. 70° E. and S. 70° W.

39.83 The 1/4 sec. cor., which is a limestone 15x8x8 ins. in a  
small mound of stone, marked 1/4 on W. side. In place of  
stone, which is deposited alongside, post,

Set an iron post 3 ft. long 1 in. diam. 30 ins. in ground  
for 1/4 sec. cor., with brass cap marked



1928

Raise a mound of stone 2 ft. base 1 1/2 ft. high W. of cor.

Resurvey of the Subdivisions  
of  
T. 4 S., R. 9 E.

chains	
	Thence, N.0°03'W. on true line bet. secs. 13 and 14. (N $\frac{1}{2}$ .)
6.20	Wash, course S.70°W.
39.86	The cor. of secs. 11,12,13 and 14, which is a limestone, 12x11x10 ins., set in a small mound of stone and unmarked. In place of stone, which is marked with a cross (X) and deposited alongside post. Set an iron post 3 ft. long 2 ins. diam. 37 ins. in ground for cor. of secs. 11,12,13 and 14, with brass cap marked <div style="text-align: center;">           T 4 S R 9 E            S 11   S 12            S 14   S 13            1928         </div>
	Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high W. of cor. Land: Rolling. Soil: Clayloam, rocky and gravelly, 3d rate. Timber: Paloverde. Undergrowth: Greasewood, mesquite and cacti.
	-----
	From the cor. of secs. 7,12,13 and 18, on E.bdy. of Tp., described in Book "D".
	S.88°49'W. on true line bet. secs. 12 and 13. (E $\frac{1}{2}$ .) Over rolling land, thru brush and scattering timber.
15.80	Old winding road, bears N. and S.
28.00	Highway No. 80, bears NE. to Phoenix and SW. to Florence.
39.78	The $\frac{1}{4}$ sec. cor., which is a limestone 14x12x4 ins., set in a mound of stone, unmarked. In place of stone, which is marked with a cross (X) and deposited alongside post. Set an iron post 3 ft. long 1 in. diam. 14 ins. in ground to bedrock, for $\frac{1}{4}$ sec. cor., with brass cap marked <div style="text-align: center;"> <math>\frac{1}{4}</math> S 12            S 13            1928         </div>
	Raise a mound of stone 5 ft. base 20 ins. high around post.
	Thence, S,89°22'W. on true line bet. secs. 12 and 13. (W $\frac{1}{2}$ .)
5.20	Wash, 15 lks. wide, course S.70°W.
39.68	The cor. of secs. 11,12,13 and 14. Land: Rolling. Soil: Clayloam, rocky and gravelly, 3d rate. Timber: Paloverde. Undergrowth: Greasewood, mesquite and cacti.
	-----

Resurvey of the Subdivisions  
of  
T. 4 S., R. 9 E.


BOOK 2028

chains

N.0°15'W. on true line bet. secs. 11 and 12.  
Over nearly level land, thru brush and scattering timber.

4.50 Draw, course S.70°W.


40.40 Set an iron post 3 ft. long 1 in. diam. 14 ins.in ground  
to bedrock, deposit marked (X) stone alongside post,  
in a mound of stone, for 1/4 sec. cor., with brass cap  
marked



45.20 Draw, course S.70°W.

56.60 Old road, bears N.20°E. and S.20°W.

80.80 Set an iron post 3 ft. long 2 ins. diam. 33 ins.in ground  
for cor. of secs. 1,2,11 and 12, with brass cap marked



Raise a mound of stone 2 ft. base 1 1/2 ft. high W. of cor.


Land: Nearly level.  
Soil: Rocky, clayloam and gravelly, 2d and 3d rate.  
Timber: Paloverde.  
Undergrowth: Greasewood, mesquite and cacti.

From the cor. of secs. 1,6,7 and 12, on E. bdy. of Tp.,  
described in Book "D".

N.89°54'W. on true line bet. secs. 1 and 12.  
Over nearly level land, thru scattering timber and brush.

9.00 Highway No. 80, bears NE. to Phoenix and SW. to Florence.

39.70 Set an iron post 3 ft. long 1 in. diam. 30 ins.in ground  
for 1/4 sec. cor., with brass cap marked



Raise a mound of stone 2 ft. base 1 1/2 ft. high N.of cor.

58.65 Old road, bears NE. and SW.

79.40 The cor. of secs. 1,2,11 and 12.

Land: Nearly level.  
Soil: Clayloam, 2d rate.  
Timber: Paloverde.  
Undergrowth: Greasewood, mesquite and cacti.


Resurvey of the Subdivisions  
of  
T. 4 S., R. 9 E.

chains	N.1°05'W. on true line bet. secs. 1 and 2. Over level land, thru brush and scattering timber.
40.40	Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked  <div style="text-align: center;"> <math>\frac{1}{4}</math>            S 2   S 1            1928         </div> Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.
80.80	The cor. of secs. 1, 2, 35 and 36, on N. bdy. of Tp., here- inbefore described.  Land: Level. Soil: Clayloam and sandy, 2d rate. Timber: Paloverde. Undergrowth: Greasewood, mesquite and cacti.
-----	
	From the cor. of secs. 2, 3, 34 and 35, on S. bdy. of Tp., described in book "C".  N.0°24'E. on true line bet. secs. 34 and 35. Over level land, thru cultivated fields.
1.25	Cor. of fences extending S., and NW.
1.50	Road, bears NW. and SE.
2.00	Fence, extends NW. and SE.; cor. of fences extending N., NW. and E. bears SE. about 1 ch. dist.
8.00	Cor. of fences extending N., S. and E. bears W., 10 lks. dist.
12.00	Cor. of fences extending N., S. and W. bears W., 12 lks. dist.
13.20	Cor. of fences extending N., S. and E. bears W., 20 lks. dist.
32.20	Cor. of fences extending S., E. and W. bears W., 70 lks. dist. Leave cultivated fields, continue over bottom land, thru scattering timber and brush.
38.90	Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for wit. cor. to $\frac{1}{4}$ sec. cor., with brass cap marked  <div style="text-align: center;">           W C  <math>\frac{1}{4}</math>            S 34   S 35            1928         </div> Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.
39.30	Left bank of Gila River wash, bears NE. and SW.
39.98	True point for $\frac{1}{4}$ sec. cor. falls in Gila River wash, a place not practicable for reestablishment of permanent cor. monument.
63.10	Right bank of Gila River wash, bears NE. and SW.
65.86	Old road, bears E. and W.
68.15	Ditch, 10 lks. wide, course SW.
71.26	Fence, extends E. and W., cor. of fences extending E., W. and N. bears W., 290 lks. dist.; enter cultivated field.
79.96	Set an iron post 3 ft. long 2 ins. diam. 40 ins. in ground, in cultivated field, deposit an iron spool 6 ins. long 2 ins. diam. alongside post, for cor. of secs. 26, 27, 34 and 35, with brass cap marked

Resurvey of the Subdivisions  
of  
T. 4. S., R. 9. E.

PLAT 6802

chains




1928

Land: Level.  
Soil: Clayloam, 1st and 2d rate.  
Timber: Cottonwood.  
Undergrowth: Greasewood, sage, mesquite and soapweed.

From the cor. of secs. 25, 26, 35 and 36.  
N. 89° 33' W. on true line bet. secs. 26 and 35.  
Over level bottom land, thru brush and scattering timber.

- 2.50 Left bank of Gila River wash, bears NE. and SW.
- 39.90 Point for 1/4 sec. cor. falls in Gila River wash, not a suitable place for reestablishment of permanent cor. monument.
- 42.90 Gila River, 50 lks. wide, course SW.
- 45.00 Right bank of Gila river wash, course SW.; continue over level land.
- 45.53 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground, deposit marked (X) stone alongside post, for vit. cor., to 1/4 sec. cor., with brass cap marked




1928

- 66.70 Canal, 10 lks. wide, course S. 15° W.
- 69.10 Fence, extends NE. and SW.; enter cultivated field.
- 71.00 Fence, extends N. and S.; cor. of fences extending N., S. and NE. bears S., 3.70 chs. dist.
- 79.80 The cor. of secs. 26, 27, 34 and 35.

Land: Level.  
Soil: Clayloam, sandy, 1st and 2d rate.  
Timber: Cottonwoods.  
Undergrowth: Greasewood, mesquite and sage.

N. 0° 42' E. on true line bet. secs. 26 and 27.  
Over level land, thru cultivated field.

- 10.25 Fence, extends NE. and SW.; cor. of fences extending NE. and S. bears SW. about 1 ch. dist.; a house bears W., about 6 chs. dist.
- 12.40 Fence, extends NE. and SW.
- 13.70 Old winding road, bears NE. and SW.
- 18.40 Power line, extends E. and W.
- 32.60 Old winding road, bears NE. and SW.
- 38.60 Hunt Highway, bears NE. to Florence and SW. to Phoenix.
- 39.98 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for 1/4 sec. cor., with brass cap marked



1928

Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Resurvey of the Subdivisions  
of

T. 4 S., R. 9 E.

chains

- 40.81 Telephone and telegraph lines, bear N.78 $\frac{1}{2}$ °E. and S.78 $\frac{1}{2}$ °W.  
41.30 Ariz. Eastern R.R., bears N.78°27'E. and S.78°27'W.  
Continue over rolling land.  
47.00 Old road, bears NW. and SE.  
70.30 Wash, 15 lks. wide, course SE.  
79.96 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground  
for cor. of secs. 22, 23, 26 and 27, with brass cap marked

T 4 S R 9 E  
S 22 | S 23  
S 27 | S 26

1928

Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$  ft. high W. of cor.  
Monument on Posten's Butte bears S.36°W.

Land: Level and rolling.

Soil: Clayloam and gravelly, 1st. and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and cacti.

From the cor. of secs. 23, 24, 25 and 26.  
N.89°22'W. on true line bet. secs. 23 and 26.  
Over rolling land, thru scattering brush.

- 16.20 Wash, 20 lks. wide, course SE.  
18.40 Old winding road, bears NW. and SE.  
18.50 Telephone lines, bear NW. and SE.  
34.50 Wash, 15 lks. wide, course SW.  
39.63 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground  
for  $\frac{1}{4}$  sec. cor., with brass cap marked

S 23.  
S 26

1928

Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$  ft. high N. of cor.

- 52.15 Wash, 60 lks. wide, course S.20°W.  
62.90 Old winding road, bears N.20°W. and S.20°E.  
74.25 Wash, 15 lks. wide, course SE.

79.26 The cor. of secs. 22, 23, 26 and 27.

Land: Rolling.

Soil: Clayloam, sandy, 2d rate.

No timber.

Undergrowth: Greasewood, mesquite and cacti.

N.0°01'W. on true line bet. secs. 22 and 23.  
Over rolling land, thru scattering brush and timber.

- 27.90 Wash, 20 lks. wide, course SE.  
29.10 Old winding road, bears NW. and SE.  
39.98 Set an iron post 3 ft. long 1 in. diam. 27 ins. in ground  
for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
S 22 | S 23

1928

Resurvey of the Subdivisions  
of  
T. 4 S., R. 9 E.

BOOK 338

chains

Raise a mound of stone 3 ft. base 1½ ft. high W. of cor.

70.00 Wash, 10 lks. wide, course E.

79.20 Wash, 15 lks. wide, course SE.

79.96 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for cor. of secs. 14, 15, 22 and 23, with brass cap marked

T 4	S R 9 E
S 15	S 14
S 22	S 23

1928

Land: Rolling.

Soil: Clayloam, rocky and gravelly, 2d and 3d rate.

Timber: Paloverde.

Undergrowth: Greasewood, mesquite and cacti.

From the cor. of secs. 13, 14, 23 and 24.

N. 89° 10' W. on true line bet. secs. 14 and 23.

Over rolling land, thru scattering brush and timber.

2.50 Old winding road, bears N. 60° E. and S. 60° W., on low ridge.

24.70 Wash, 30 lks. wide, course SW.

30.55 Old improved road, bears N. and S.

31.20 Telephone lines, bear N. and S.

34.90 Wash, 15 lks. wide, course S.

39.79 Set an iron post 3 ft. long 1 in. diam. 8 ins. in ground to bedrock, deposit marked (X) stone alongside post, in a mound of stone, for ¼ sec. cor., with brass cap marked

¼ S 14
S 23

1928

52.30 Wash, 10 lks. wide, course S. 20° W.

65.10 Wash, 25 lks. wide, course S.

68.60 Dim winding road, bears NW. and SE.

79.58 The cor. of secs. 14, 15, 22 and 23.

Land: Rolling.

Soil: Clayloam, rocky and gravelly, 2d and 3d rate.

Timber: Paloverde.

Undergrowth: Greasewood, and cacti.

N. 0° 26' W. on true line bet. secs. 14 and 15.

Over rolling land, thru scattering timber and brush.

13.50 Wash, 20 lks. wide, course E.

20.85 Wash, course S. 80° E.

31.95 Draw, course SE.

39.98 Set an iron post 3 ft. long 1 in. diam. 12 ins. in ground to bedrock, deposit marked (X) stone alongside post, in a mound of stone, for ¼ sec. cor., with brass cap marked

¼
S 15   S 14

1928



Resurvey of the Subdivisions  
of  
T. 4 S., R. 9 E.

chains

79.96 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for cor. of secs. 10, 11, 14 and 15, with brass cap marked

T 4 S R 9 E  
S 10 | S 11  
S 15 | S 14

1928

Raise a mound of stone 2 ft. base  $1\frac{1}{2}$  ft. high W. of cor.

Land: Rolling.

Soil: Clayloam, rocky and gravelly, 2d and 3d rate.

Timber: Paloverde.

Undergrowth: Greasewood and cacti.

From the cor. of secs. 11, 12, 13 and 14.  
N.  $87^{\circ}48'$  W. on true line bet. secs. 11 and 14. ( $E\frac{1}{2}$ .)  
Over rolling land, thru scattering timber and brush.

15.50 Wash, 20 lks. wide, course SW.  
25.00 Wash, 10 lks. wide, course SE.  
32.10 Old improved road, bears N. and S.  
32.40 Telephone lines, bear N. and S.; about 5 chs. N. the telephone lines bear to NW.

40.39 The  $\frac{1}{4}$  sec. cor., which is a limestone  $14 \times 12 \times 2$  ins., set in a small mound of stone, witnessed by mound of earth to N.; in place of stone, which is marked with a cross (X) and deposited alongside post,

Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$  S 11  
S 14

1928

Raise a mound of stone 2 ft. base  $1\frac{1}{2}$  ft. high N. of cor.

Thence, S.  $89^{\circ}54'$  W. on true line bet. secs. 11 and 14, ( $W\frac{1}{2}$ .)

4.18 Wash, 10 lks. wide, course S.  
14.40 Wash, 20 lks. wide, course S.  
26.10 Wash, 10 lks. wide, course S.

40.20 The cor. of secs. 10, 11, 14 and 15.

Land: Rolling.

Soil: Clayloam, rocky and gravelly, 2d and 3d rate.

Timber: Paloverde.

Undergrowth: Greasewood and cacti.

N.  $0^{\circ}17'$  E. on true line bet. secs. 10 and 11.  
Over nearly level land, thru scattering timber and brush.

39.98 Set an iron post 3 ft. long 1 in. diam. 32 ins. in ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
S 10 | S 11

1928


Raise a mound of stone 2 ft. base  $1\frac{1}{2}$  ft. high W. of cor.

Resurvey of the Subdivisions  
of  
T. 4 S., R. 9 E.

BOOK 3855

chains

79.96 Set an iron post 3 ft. long 2 ins. diam. 30 ins. in ground for cor. of secs. 2, 3, 10 and 11, with brass cap marked




1928

Raise a mound of stone 2 ft. base 1½ ft. high W. of cor.

Land: Nearly level.  
 Soil: Clayloam, gravelly, 2d rate.  
 Timber: Paloverde.  
 Undergrowth: Greasewood, mesquite and cacti.

-----  
 From the cor. of secs. 1, 2, 11 and 12.  
 N.89°26'W. on true line bet. secs. 2 and 11.  
 Over level land, thru scattering timber and brush.

39.95 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for ¼ sec. cor., with brass cap marked



1928

Raise a mound of stone 2 ft. base 1½ ft. high N. of cor.


58.70 Telephone lines, bear N.25°W. and S.25°E.  
 59.05 Old winding road, bears NW. and SE.

79.90 The cor. of secs. 2, 3, 10 and 11.

Land: Level.  
 Soil: Clayloam and sandy, 2d rate.  
 Timber: Paloverde.  
 Undergrowth: Greasewood, mesquite and cacti.

-----  
 N.0°55'W. on true line bet. secs. 2 and 3.  
 Over level land, thru scattering timber and brush.

39.98 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for ¼ sec. cor., with brass cap marked



1928

Raise a mound of stone 2 ft. base 1½ ft. high W. of cor.

69.67 U.S.G.S. monument, which is an iron post 3 ins. diam. 12 ins. above ground with brass cap marked Elevation above sea, 1595 feet, bears E., 85 lks. dist.

77.94 Telephone lines, bear N.25°W. and S.25°E.

80.35 The cor. of secs. 2, 3, 34 and 35, on N.bdy. of Tp., here-inbefore described.

Land: Level.  
 Soil: Clayloam, sandy, 2d rate.  
 Timber: Paloverde.  
 Undergrowth: Greasewood, mesquite and cacti.


-----

Resurvey of the Subdivisions  
of  
T. 4 S., R. 9 E.


chains

From the cor. of secs. 3, 4, 33 and 34, on S. bdy. of Tp.,  
described in book "C".  
N. 0° 01' W. on true line bet. secs. 33 and 34.  
Over level bottom land, thru scattering timber and brush.

- 4.70 Fence, extends NE. and SW.
- 14.65 Old winding road, bears NE. and SW.
- 35.75 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground,  
deposit marked (X) stone alongside post, at base, for  $\frac{1}{4}$  sec. cor. to  $\frac{1}{4}$  sec. cor., with brass cap marked



- 36.00 Left bank of main channel of Gila River wash, course W.
- 40.04 True point for  $\frac{1}{4}$  sec. cor. falls in a place not suitable  
for reestablishment of permanent cor. monument.
- 49.80 Right bank of Gila River wash, 6 ft. high, bears E. and W.
- 50.21 Fence, extends E. and W., continue over cultivated field.
- 58.20 Intersection of roads, bear NW., SE. and N., continue along  
road to N. Leave cultivated field.
- 58.60 Canal, 15 lks. wide, course NW.
- 58.80 Cor. of fences extending N. and W. bears W., 50 lks. dist.
- 78.90 Cor. of fences extending N., S. and E. bears E., 23 lks. dist.,  
cor. of fences extending N., S. and W. bears W., 23 lks. dist.
- 80.08 Point for cor. of secs. 27, 28, 33 and 34, proportional in  
latitude and departure determined from collateral evi-  
dence, i.e.; center line of lane between property fences.  
Set an iron post 3 ft. long 2 ins. diam. 36 ins. in ground  
for cor. of secs. 27, 28, 33 and 34, with brass cap marked



Deposit a marked (X) stone alongside of post, at base.  
From which:  
A cottonwood, 12 ins. diam. bears S. 63 $\frac{1}{2}$ ° E., 616 lks. dist.  
marked T 4 S R 9 E S 34 BT.  
No other tree. Cultivated fields E. and W. to north.

Land: Level.  
Soil: Sandy loam and clay, 1st and 2d rate.  
Timber: Cottonwoods.  
Undergrowth: Soapweed, sage, mesquite and greasewood.

From the cor. of secs. 26, 27, 34 and 35.  
N. 89° 44' W. on true line bet. secs. 27 and 34.  
Over level land, thru cultivated fields.

- .71 Fence, extends N. and S.
- 13.90 Fence, extends N. and S.
- 34.50 Leave cultivated field, bears NE. and SW.; continue over  
cleared land.
- 38.90 Winding road, bears NE. and SW.
- 39.95 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground.  
deposit marked (X) stone alongside post, for  $\frac{1}{4}$  sec. cor.,  
with brass cap marked

Resurvey of the Subdivisions  
of  
T. 4 S., R. 9 E.

BOOK 3000

chains

$\frac{1}{4}$  S 27  
S 34

1928

- 40.74 Fence, extends N. and S.; cor. of fences extending N. and W. bears S., 2 chs. dist.; cor. of fences extending N., S. and NE. bears N. 2 chs. dist.
- 60.00 Adobe house bears S., 3 chs. dist.
- 74.00 Pump house bears S., 2.50 chs. dist.
- 79.67 Fence, extends N. and S.
- 79.90 The cor. of secs. 27, 28, 33 and 34.

Land: Level.  
Soil: Sandy loam and clay, 1st and 2d rate.  
Timber: Cottonwood.  
Undergrowth: Cleared.

N.0°33'E. on true line bet. secs. 27 and 28.  
Over level land, along lane between fences.

- 18.50 Power line, bears E. and W.; cor. of fences extending E. and S. bears E., 23 lks. dist.; cor. of fences extending W. and S. bears W., 23 lks. dist.
- 18.65 Road, bears E. and W., at intersection of lane from S.; continue over level land, thru desert growth.
- 19.50 Fence, extends NE. and SW.
- 20.00 Old road, bears NE. and SW.
- 23.50 Old road, bears NE. and SW.
- 37.90 Old winding road, bears NE. and SW.
- 40.04 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
S 28 | S 27  
1928

Raise a mound of stone 2 ft. base  $1\frac{1}{2}$  ft. high W. of cor.

- 54.10 Hunt Highway, bears NE. to Florence and SW. to Phoenix.
- 55.00 Telegraph and telephone lines, bears NE. and SW.
- 55.70 Ariz. Eastern R.R., bears NE. and SW.; continue over rolling land.
- 76.20 Old winding road, bears NW. and SE.
- 80.08 Set an iron post 3 ft. long 2 ins. diam. 14 ins. in ground to bedrock, deposit marked (X) stone alongside post, in a mound of stone, for cor. of secs. 21, 22, 27 and 28, with brass cap marked

T 4 S R 9 E  
S 21 | S 22  
S 28 | S 27

1928

The Monument on summit of Posten's Butte bears S.65°E.

Land: Level and rolling.  
Soil: Clay loam, sandy and rocky, 1st and 2d rate.  
Timber: Paloverde.  
Undergrowth: Greasewood, mesquite and cacti.

Resurvey of the Subdivisions  
of

T. 4 S., R. 9 E.

chains

	From the cor. of secs. 22, 23, 26 and 27. N. 89° 44' W. on true line bet. secs. 22 and 27. Over rolling land, thru scattering timber and brush.
5.00	Wash, 10 lks. wide, course SE.
11.30	Old road, bears NW. and SE.; ascend.
39.00	Top of ascent; descend.
40.08	Set an iron post 3 ft. long 1 in. diam. 3/2 insl in ground for 1/4 sec. cor., with brass cap marked
	$\begin{array}{c} \frac{1}{4} \text{ S } 22 \\ \hline \frac{1}{4} \text{ S } 27 \end{array}$
	1928
	Raise a mound of stone 2 ft. base 1 1/2 ft. high N. of cor.
50.00	Wash, 25 lks. wide, course SW.
80.16	The cor. of secs. 21, 22, 27 and 28.
	Land: Rolling. Soil: Clayloam, rocky and gravelly, 2d and 3d rate. Timber: Paloverde. Undergrowth: Greasewood and cacti.
-----	
	N. 0° 13' E. on true line bet. secs. 21 and 22. Over rolling land, thru scattering timber and brush.
12.70	Old winding road, bears NW. and SE.
40.04	Set an iron post 3 ft. long 1 in. diam. 3/2 ins. in ground for 1/4 sec. cor., with brass cap marked
	$\begin{array}{c} \frac{1}{4} \\ \text{S } 21 \mid \text{S } 22 \end{array}$
	1928
	Raise a mound of stone 2 ft. base 1 1/2 ft. high W. of cor.
51.00	Wash, 15 lks. wide, course N. 20° W.
57.70	Wash, 20 lks. wide, course W.
80.08	Set an iron post 3 ft. long 2 ins. diam. 30 ins. in ground for cor. of secs. 15, 16, 21 and 22, with brass cap marked
	$\begin{array}{c} \text{T } 4 \text{ S } \text{ R } 9 \text{ E} \\ \hline \text{S } 16 \mid \text{S } 15 \\ \hline \text{S } 21 \mid \text{S } 22 \end{array}$
	1928
	Raise a mound of stone 3 ft. base 2 ft. high W. of cor. Cor. comes in small wash, 5 lks. wide, course N. 85° W.
	Land: Rolling. Soil: Clayloam, rocky and gravelly, 2d and 3d rate. Timber: Paloverde. Undergrowth: Greasewood and cacti.
-----	

Resurvey of the Subdivisions  
of  
T. 4. S., R. 9 E.

BOOK 8888

chains

From the cor. of secs. 14, 15, 22 and 23.  
N. 89° 37' W. on true line bet. secs. 15 and 22.  
Over rolling land, thru scattering timber and brush.

4.90 Wash, 10 lks. wide, course SE.  
25.00 Old winding road, bears NW. and SE.

39.91 Set an iron post 3 ft. long 1 in. diam. 30 ins. in ground  
for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$  S 15  
S 22

1928

Raise a mound of stone 2 ft. base  $1\frac{1}{2}$  ft. high N. of cor.

40.50 Wash, 10 lks. wide, course SW.; near head.  
68.50 Old road, bears NW. and SE.

79.82 The cor. of secs. 15, 16, 21 and 22.

Land: Rolling.  
Soil: Clayloam, gravelly and rocky, 2d and 3d rate.  
Timber: Paloverde.  
Undergrowth: Greasewood and cacti.

N. 0° 31' W. on true line bet. secs. 15 and 16.  
Over rolling land, thru scattering timber and brush.

17.10 Wash, 30 lks. wide, course SW.  
28.00 Wash, 10 lks. wide, course SE.

40.04 Set an iron post 3 ft. long 1 in. diam. 32 ins. in ground  
for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
S 16 | S 15  
1928

Raise a mound of stone 2 ft. base  $1\frac{1}{2}$  ft. high W. of cor.

80.08 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground  
for cor. of secs. 9, 10, 15 and 16, with brass cap marked

T 4 S R 9 E  
S 9 | S 10  
S 16 | S 15

1928

Raise a mound of stone 2 ft. base  $1\frac{1}{2}$  ft. high W. of cor.

Land: Rolling.  
Soil: Clayloam, rocky and gravelly, 2d and 3d rate.  
Timber: Paloverde and ironwood.  
Undergrowth: Greasewood, and cacti.

Resurvey of the Subdivisions  
of  
T. 4. S., R. 9 E.

chains

From the cor. of secs. 10, 11, 14 and 15.  
N. 89° 33' W. on true line bet. secs. 10 and 15.  
Over nearly level land, thru scattering timber and brush.

39.94 Set an iron post 3 ft. long 1 in. diam. 30 ins. in ground  
for  $\frac{1}{4}$  sec. cor., with brass cap marked

$$\frac{\frac{1}{4} \text{ S } 10}{\text{S } 15}$$

1928

Raise a mound of stone 3 ft. base  $1\frac{1}{2}$  ft. high N. of cor.

44.90 Dim winding road, bears NW. and SE.

59.70 Wash, 20 lks. wide; course S.

79.88 The cor. of secs. 9, 10, 15 and 16.

Land: Nearly level.

Soil: Clayloam, gravelly, 2d rate.

Timber: Paloverde and ironwood.

Undergrowth: Greasewood and cacti.

N. 0° 10' E. on true line bet. secs. 9 and 10.  
Over level land, thru scattering timber and brush.

.90 Old winding road, bears NE. and SW.

40.04 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground  
for  $\frac{1}{4}$  sec. cor., with brass cap marked

$$\frac{\frac{1}{4}}{\text{S } 9 \mid \text{S } 10}$$

1928

Raise a mound of stone 2 ft. base  $1\frac{1}{2}$  ft. high W. of cor.

80.08 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground  
for cor. of secs. 3, 4, 9 and 10, with brass cap marked

$$\begin{array}{c} \text{T } 4 \text{ S } \text{R } 9 \text{ E} \\ \text{S } 4 \mid \text{S } 3 \\ \hline \text{S } 9 \mid \text{S } 10 \end{array}$$

1928

Raise a mound of stone 2 ft. base  $1\frac{1}{2}$  ft. high W. of cor.

Land: Level.

Soil: Clayloam, sandy and gravelly, 2d and 3d rate.

Timber: Paloverde and ironwood.

Undergrowth: Greasewood and cacti.

From the cor. of secs. 2, 3, 10 and 11.  
N. 89° 28' W. on true line bet. secs. 3 and 10.  
Over level land, thru scattering timber and brush.

40.04 Set an iron post 3 ft. long 1 in. diam. 29 ins. in ground  
for  $\frac{1}{4}$  sec. cor., with brass cap marked

$$\frac{\frac{1}{4} \text{ S } 3}{\text{S } 10}$$

1928

Resurvey of the Subdivisions  
of

BOOK 500

T. 4 S., R. 9 E.

chains

80.08 Raise a mound of stone 2 ft. base  $1\frac{1}{2}$  ft. high N. of cor.  
The cor. of secs. 3, 4, 9 and 10.

Land: Level.  
Soil: Clayloam, sandy and gravelly, 2d and 3d rate.  
Timber: Paloverde.  
Undergrowth: Greasewood and cacti.

40.04 N.  $0^{\circ}37'W.$  on true line bet. secs. 3 and 4.  
Over level land, thru scattering timber and brush.

Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
S 4 | S 3  
1928

79.98 Raise a mound of stone 2 ft. base  $1\frac{1}{2}$  ft. high W. of cor.  
The cor. of secs. 3, 4, 33 and 34, on N. bdy. of Tp., here-  
inbefore described.

Land: Level.  
Soil: Clayloam, rocky and gravelly, 2d and 3d rate.  
Timber: Paloverde.  
Undergrowth: Greasewood, mesquite and cacti.

From the cor. of secs. 4, 5, 32 and 33, on S. bdy. of Tp.,  
described in book "C".

N.  $0^{\circ}05'W.$  on true line bet. secs. 32 and 33.  
Over bottom land of Gila River wash, thru timber and brush.

24.60 Right bank of Gila River wash, bears NE. and SW.; contin-  
ue over level land, thru scattering timber and brush.  
39.90 Canal, 10 lks. wide, course W.

40.01 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground  
for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
S 32 | S 33  
1928

From which  
A mesquite, 10 ins. diam. bears S.  $7^{\circ}E.$ , 94 lks. dist.  
marked  $\frac{1}{4}$  S 33 BT.  
A mesquite, 12 ins. diam. bears S.  $39\frac{1}{2}^{\circ}W.$ , 96 lks. dist.  
marked  $\frac{1}{4}$  S 32 BT.

40.50 Old winding road, bears NW. and SE.

49.40 Fence, extends E. and W.; cor. of fences extending N. and  
E. bears W., 1.70 lks. dist.

59.00 Wash, 10 lks. wide, course W.

69.64 Cor. of fences extending N., S. and W. bears W., 130 lks. dist.

80.02 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground  
deposit marked (X) stone alongside post, for cor. of  
secs. 28, 29, 32 and 33, with brass cap marked



Resurvey of the Subdivisions  
of  
T. 4 S., R. 9 E.

chains

T 4 S R 9 E  
S 29 | S 28  
S 32 | S 33

1928

Cor. comes in cleared pasture land. No other witness practicable, or available.

Land: Level.  
Soil: Clayloam and sandy, 1st and 2d rate.  
Timber: Cottonwood.  
Undergrowth: Greasewood, mesquite and cacti.

From the cor. of secs. 27, 28, 33 and 34.  
N. 89° 50' W. on true line bet. secs. 28 and 33.  
Over level land, thru cleared fields.

- .23 Fence, extends N. and S.
- 20.27 Fence, extends N. and S.; cor. of fences extending E., W. and N. bears S., 120 lks. dist.
- 21.00 House bears N., about 15 chs. dist.
- 39.69 Set an iron post 3 ft. long 1 in. diam. 36 ins. in ground, in cleared field, for  $\frac{1}{4}$  sec. cor., with brass cap marked,

$\frac{1}{4}$  S 28  
S 33

1928

Deposit a marked (X) stone alongside post, at base.  
A cottonwood, 8 ins. diam. bears S. 74 $\frac{1}{2}$ ° E., 451 lks. dist.  
marked  $\frac{1}{4}$  S 33 BT.  
No other trees.

- 40.14 Fence extends N. and S.; cor. of fences extending E., W. and N. bears S., 124 lks. dist.
- 59.91 Fence extends N. and S.; cor. of fences extending N., S. and E. bears S., 190 lks. dist.
- 79.38 The cor. of secs. 28, 29, 32 and 33.


Land: Level.  
Soil: Clayloam, 1st and 2d rate.  
Timber: Land is cleared except for an occasional cottonwood tree.

N. 0° 08' E. on true line bet. secs. 28 and 29.  
Over level land, thru cleared field.

- 8.70 Fence, extends E. and W.; cor. of fences extending E., W. and S. bears W., 130 lks. dist.; cor. of fences extending E., W. and N. bears W., 4 chs. dist.; cor. of fences extending N. and W. bears E., 167 lks. dist.
- 10.00 Disused shack bears W., about 3 chs. dist.
- 18.52 Cor. of fences extending E. and S. bears E., 90 lks. dist.; cor. of fences extending W. and S. bears W., 230 lks. dist.
- 18.70 Power line, extends E. and W.; continue thru desert growth.
- 19.80 Old improved road, bears E. and W.
- 25.70 Road, bears NW. and SE.
- 40.01 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for  $\frac{1}{4}$  sec. cor., with brass cap marked


Resurvey of the Subdivisions  
of  
T. 4. S., R. 9 E.

BOOK 3888



From which  
 A mesquite 10 ins. diam. bears N.58°E., 570 lks. dist.  
 marked  $\frac{1}{4}$  S 28 BT.  
 A mesquite 8 ins. diam. bears S.43½°W., 182 lks. dist.  
 marked  $\frac{1}{4}$  S 29 BT.

- 50.60. Hunt Highway, bears NE. to Florence and SW. to Phoenix.
- 51.10 Right of way fence, extends NE. and SW.
- 52.00 Telegraph and telephone lines, extend NE. and SW.
- 52.75 Ariz. Eastern R.R., bears N.75°E. and S.75°W.
- 54.40 Right of way fence; extends NE. and SW.; continue over rolling land; ascend.
- 75.50 Old road, bears NW. and SE.
- 80.02 Set an iron post 3 ft. long 2 ins. diam. 14 ins. in ground to bedrock, deposit marked (X) stone alongside post, in a mound of stone, for cor. of secs. 20, 21, 28 and 29, with brass cap marked




1928

Land: Level and rolling.  
 Soil: Clayloam, and rocky and gravelly, 2d and 3d rate.  
 Timber: Paloverde.  
 Undergrowth: Greasewood, mesquite, sage and cacti.

From the cor. of secs. 21, 22, 27 and 28.  
 N.89°55'W. on true line bet. secs. 21 and 28.  
 Over rolling land, thru scattering timber and brush.

- 3.60 Old winding road, bears NW. and SE.
- 40.05 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for  $\frac{1}{4}$  sec. cor., with brass cap marked



1928

Raise a mound of stone 2 ft. base 1½ ft. high N. of cor.

- 44.10 Wash, 30 lks. wide, course SW.
- 44.75 Old winding road, bears NE. and SW.
- 56.35 Old Phoenix and Eastern R.R., bears NW. and SE.
- 57.05 Telegraph lines, extend NW. and SE.
- 73.50 Wash, 10 lks. wide, course S.
- 80.10 The cor. of secs. 20, 21, 28 and 29.


Land: Rolling.  
 Soil: Clayloam, rocky and gravelly, 3d rate.  
 Timber: Paloverde.  
 Undergrowth: Greasewood, mesquite and cacti.

Resurvey of the Subdivisions  
of  
T. 4. S., R. 9 E.

chains

N.0°26'E. on true line bet. secs. 20 and 21.  
Over rolling land, thru scattering timber and brush.

40.01 Set an iron post 3 ft. long 1 in. diam. 10 ins. in ground  
to bedrock, deposit marked (X) stone alongside post, in  
a mound of stone, for 1/4 sec. cor., with brass cap marked




42.10 Telegraph line, extends NW. and SE.

43.00 Old Phoenix and Eastern R.R., bears NW. and SE.

57.10 Wash, 20 lks. wide, course SW.

80.02 Set an iron post 3 ft. long 2 ins. diam. 12 ins. in ground  
to bedrock, deposit marked (X) stone alongside post, in  
a mound of stone, for cor. of secs. 16, 17, 20 and 21,  
with brass cap marked



Land: Rolling.

Soil: Clayloam, rocky and gravelly, 2d and 3d rate.

Timber: Paloverde and ironwood.

Undergrowth: Greasewood, mesquite and cacti.

From the cor. of secs. 15, 16, 21 and 22.

N.89°54'W. on true line bet. secs. 16 and 21.


Over rolling land, thru scattering brush and timber.

5.70 Wash, 20 lks. wide, course SW.

28.00 Old winding road, bears NW. and SE.

31.00 Old winding road, bears NW. and SE.

39.85 Set an iron post 3 ft. long 1 in. diam. 12 ins. in ground  
to bedrock, deposit marked (X) stone alongside post, in  
a mound of stone, for 1/4 sec. cor., with brass cap marked



79.70 The cor. of secs. 16, 17, 20 and 21.

Land: Rolling.

Soil: Clayloam, rocky and gravelly, 3d rate.

Timber: Paloverde and ironwood.


Undergrowth: Greasewood, mesquite and cacti.

N.0°30'W. on true line bet. secs. 16 and 17.

Over nearly level land, thru scattering brush and timber.

4.20 Wash, 20 lks. wide, course SW.

40.01 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground  
for 1/4 sec. cor., with brass cap marked



Resurvey of the Subdivisions  
of  
T. 4 S., R. 9 E.

BOOK 3868

chains

$\frac{1}{4}$   
S 31 | S 32  
1928

From which  
A mesquite, 8 ins. diam. bears S.89°E., 110 lks. dist.  
marked  $\frac{1}{4}$  S 32 BT.  
A mesquite 3 ins. diam. bears N.13°W., 23 lks. dist.  
marked  $\frac{1}{4}$  S 31 BT.

- 56.28 Fence extending E. and W.; cor. of fences extending E., W. and N. bears W., 270 lks. dist.
- 72.60 An adobe house bears W., 110 lks. dist.
- 73.00 Fence, extends E. and W., cor. of fences extending N., S. and E. bears W., 2.50 chs. dist. Enter cleared field.
- 80.08 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for cor. of secs. 29, 30, 31 and 32, with brass cap marked

T 4 S R 9 E  
S 30 | S 29  
S 31 | S 32  
1928

Deposit a marked (X) stone alongside post, at base. No other witness practicable, or available.

Land: Level.  
Soil: Clayloam, and sandy, 1st and 2d rate.  
No timber.  
Undergrowth: Greasewood, mesquite and sage.

-----  
From the cor. of secs. 28, 29, 32 and 33.  
N.89°51'W. on true line bet. secs. 29 and 32.  
Over level, cleared land.

- .86 Fence, extends N. and S.
- 21.12 Fence, extends N. and S.
- 39.71 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground, deposit marked (X) stone alongside post, at base, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$  S 29  
 $\frac{1}{4}$  S 32  
1928

From which  
A mesquite, 20 ins. diam. bears N.59½°E., 374 lks. dist.  
marked  $\frac{1}{4}$  S 29 BT.  
No other trees.  
An adobe house bears N.49°E., about 25 chs. dist.

- 41.00 Fence, extends N. and S.
- 61.50 Fence, extends N. and S.; cor. of fences extending S. and W. bears N., 3 chs. dist.
- 64.60 An adobe house bears N., 4 chs. dist.
- 67.70 Fence, extends N. and S.; cor. of fences extending S. and E. bears N., 3 chs. dist.
- 79.42 The cor. of secs. 29, 30, 31 and 32.

Land: Level and cleared.  
Soil: Clayloam and sandy, 1st and 2d rate.  
-----


Resurvey of the Subdivisions  
of  
T. 4 S. R. 9 E.

chains

From the cor. of secs. 25,30,31 and 36, on W.bdy. of Tp.,  
hereinbefore described.  
S.89°41'E. on true line bet. secs. 30 and 31.  
Over level land, thru brush and scattering timber.

.59 Fence, extends N. and S.  
6.00 Old winding road, bears NW. and SE.  
37.28 Fence, extends N. and S.; cor. of fences extending N.,S.  
E. and W. bears N., 150 lks. dist.

39.72 Set an iron post 3 ft. long 1 in. diam. 33 ins.in ground  
for 1/4 sec. cor.; with brass cap marked



1928

Raise a mound of stone 2 ft. base 1 1/2 ft. high N.of cor.

41.70 An adobe house bears S., 90 lks. dist.  
46.33 Fence, extends N. and S.; cor. of fences extending N. and  
W. bears S., 2.50 chs. dist.; cor. of fences extending  
S.and W. bears N., 3 chs. dist.; continue thru cleared land.

62.86 Cor. of fences extending N.and E. bears N.,130 lks.dist.

63.66 Fence, extends N. and S.; cor. of fences extending N.,  
S.,E. and W. bears N., 130 lks. dist.

77.68 Cor. of fences extending W. and N. bears N.,130 lks.dist.

79.28 The cor. of secs. 29,30,31 and 32.

Land: Level.  
Soil: Clayloam and sandy and gravelly, 2d rate.  
Timber: None.  
Undergrowth: Greasewood, mesquite and sage.

N.0°15'E. on true line bet. secs. 29 and 30.  
Over level land, across cleared field.

18.37 Fence, extends E.and W., cor. of fences extending E.,W.  
and S. bears W., 230 lks. dist.; leave cleared land,  
continue thru scattering brush.

18.47 Power lines, extend E. and W.

18.79 Road, bears E. and W.

30.10 Hunt Highway, bears NE. to Florence and SW. to Phoenix.

30.70 Right of way fence, extends NE. and SW.

31.60 Telegraph and telephone lines, extend NE. and SW.

32.20 Ariz. Eastern R.R., bears NE. and SW.


33.80 Right of way fence, extends NE. and SW.; continue over  
rolling land.

40.04 Set an iron post 3 ft. long 1 in. diam. 14 ins.in ground  
to bedrock, deposit a marked (X) stone alongside post,  
in a mound of stone, for 1/4 sec. cor., with brass cap  
marked



1928

80.08 Set an iron post 3 ft. long 2 ins. diam. 33 ins.in ground  
for cor. of secs. 19,20,29 and 30, with brass cap marked




1928

Resurvey of the Subdivisions  
of  
T. 4 S., R. 9 E.

BOOK 3080

chains

80.02 Raise a mound of stone 2 ft. base 1½ ft. high W. of cor.  
Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground  
for cor. of secs. 8, 9, 16 and 17, with brass cap marked



1928


Raise a mound of stone 2 ft. base 1½ ft. high W. of cor.

Land: Nearly level.  
Soil: Clayloam, rocky and gravelly, 2d and 3d rate.  
Timber: Paloverde and ironwood.  
Undergrowth: Greasewood, mesquite and cacti.

From the cor. of secs. 9, 10, 15 and 16.  
N. 89° 57' W. on true line bet. secs. 9 and 16.  
Over nearly level land, thru scattering brush and timber.

1.00 Old winding road, bears N. 10° E. and S. 10° W.

39.77 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground  
for ¼ sec. cor., with brass cap marked



1928

Raise a mound of stone 2 ft. base 1½ ft. high N. of cor.


68.90 Old winding road, bears NW. and SE.

79.54 The cor. of secs. 8, 9, 16 and 17.

Land: Nearly level.  
Soil: Clayloam and sandy, 2d rate.  
Timber: Paloverde.  
Undergrowth: Greasewood and cacti.

N. 0° 13' W. on true line bet. secs. 8 and 9.  
Over level land, thru scattering brush and timber.


40.01 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground  
for ¼ sec. cor., with brass cap marked



1928

Raise a mound of stone 2 ft. base 1½ ft. high W. of cor.

80.02 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground  
for cor. of secs. 4, 5, 8 and 9, with brass cap marked



1928

Raise a mound of stone 2 ft. base 1½ ft. high W. of cor.

Resurvey of the Subdivisions  
of

T. 4 S., R. 9 E.

Chains

Land: Level.  
Soil: Clayloam and sandy, 2d rate.  
Timber: Paloverde.  
Undergrowth: Greasewood and cacti.

From the cor. of secs. 3, 4, 9 and 10.  
N. 89° 58' W. on true line bet. secs. 4 and 9.  
Over level land, thru scattering timber and brush.

25.00 Wash, 10 lks. wide, course SW.

40.02 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground  
for  $\frac{1}{4}$  sec. cor., with brass cap marked

$$\frac{1}{4} \begin{array}{l} S 4 \\ S 9 \end{array}$$

1928

Raise a mound of stone 2 ft. base  $1\frac{1}{2}$  ft. high N. of cor.

80.04 The cor. of secs. 4, 5, 8 and 9.

Land: Level.  
Soil: Clayloam and gravelly, 2d rate.  
Timber: Paloverde.  
Undergrowth: Greasewood, mesquite and cacti.

N. 0° 26' W. on true line bet. secs. 4 and 5.  
Over level land, thru scattering timber and brush.

40.01 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground  
for  $\frac{1}{4}$  sec. cor., with brass cap marked

$$\frac{1}{4} \begin{array}{l} S 5 \\ S 4 \end{array}$$

1928

Raise a mound of stone 2 ft. base  $1\frac{1}{2}$  ft. high W. of cor.

80.34 The cor. of secs. 4, 5, 32 and 33, on N. bdy. of Tp., here-  
inbefore described.

Land: Level.  
Soil: Clayloam, and gravelly, 2d rate.  
Timber: Paloverde and ironwood.  
Undergrowth: Greasewood, mesquite and cacti.

From the cor. of secs. 5, 6, 31 and 32, on S. bdy. of Tp.,  
described in book "C".

N. 0° 09' W. on true line bet. secs. 31 and 32.  
Over level bottom land of Gila River wash.

4.10 S. end of fence extending N. bears W., 90 lks. dist.

4.30 Right bank of Gila River wash, 10 ft. high, bears NE. and  
SW.; continue over level land, thru desert growth.

10.40 Canal, 15 lks. wide, course SW.

10.60 Old winding road, bears NE. and SW.

38.48 Cor. of fences extending E., W. and S. bears W., 182 lks. dist.

40.04 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground  
deposit marked (X) stone alongside post, for  $\frac{1}{4}$  sec.  
cor., with brass cap marked

Resurvey of the Subdivisions  
of  
T. 4. S., R. 9. E.

BOOK 3888

Chains

Raise a mound of stone 2 ft. base  $1\frac{1}{2}$  ft. high W. of cor.

Land: Level and rolling.  
Soil: Clayloam, gravelly and rocky, 2d and 3d rate.  
Timber: None.  
Undergrowth: Greasewood, mesquite, sage and cacti.

-----  
From the cor. of secs. 20, 21, 28 and 29.  
N.  $89^{\circ}53'$  W. on true line bet. secs. 20 and 29.  
Over rolling land, thru scattering timber and brush.

7.60 Old winding road, bears NW. and SE.  
23.80 Wash, 20 lks. wide, course SE.  
29.40 Wash, 10 lks. wide, course SE.

39.63 Set an iron post 3 ft. long 1 in. diam. 14 ins. in ground to bedrock, deposit a marked (X) stone alongside post, in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$  S 20  
-----  
 $\frac{1}{4}$  S 29

1928

56.25 Old winding road, bears NW. and SE.

79.26 The cor. of secs. 19, 20, 29 and 30;

Land: Rolling.  
Soil: Clayloam, rocky and gravelly, 2d and 3d rate.  
Timber: Paloverde.  
Undergrowth: Greasewood, mesquite and cacti.

-----  
From the cor. of secs. 19, 24, 25 and 30, on W. bdy. of Tp., hereinbefore described.  
S.  $89^{\circ}40'$  E. on true line bet. secs. 19 and 30.  
Over rolling land, thru scattering timber and brush.

9.00 Road, bears NE. and SW.

40.11 Set an iron post 3 ft. long 1 in. diam. 14 ins. in ground to bedrock, deposit marked (X) stone alongside post, in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$  S 19  
-----  
S 30

1928

54.80 Wash, 10 lks. wide, course S.  
61.45 Wash, 15 lks. wide, course SW.  
67.00 Wash, 10 lks. wide, course SW.

79.84 The cor. of secs. 19, 20, 29 and 30.

Land: Rolling.  
Soil: Clayloam, rocky and gravelly, 3d rate.  
Timber: Paloverde.  
Undergrowth: Greasewood, mesquite and cacti.

-----



Resurvey of the Subdivisions  
of

T. 4 S., R. 9 E.

chains	
	N.0°02'E. on true line bet. secs. 19 and 20. Over rolling land, thru desert growth.
4.50	Wash, 10 lks. wide, course SW.
40.04	Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ S 19   S 20 1928
	Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.
42.60	Old winding road, bears NW. and SE.
48.00	Wash, 10 lks. wide, course SW.
80.08	Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for cor. of secs. 17, 18, 19 and 20, with brass cap marked
	T 4 S R 9 E S 18   S 17 S 19   S 20 1928
	Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.
	Land: Rolling. Soil: Clayloam, rocky and gravelly, 2d and 3d rate. Timber: Paloverde. Undergrowth: Greasewood, mesquite and cacti.
-----	
	From the cor. of secs. 16, 17, 20 and 21. N.89°46'W. on true line bet. secs. 17 and 20. Over rolling land, thru brush and scattering timber.
27.80	Old Phoenix and Eastern R.R., bears NW. and SE.
28.50	Telegraph lines, extend NW. and SE.
29.50	Dim winding road, bears NW. and SE.
39.92	Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ S 17 S 20 1928
	Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.
79.84	The cor. of secs. 17, 18, 19 and 20.
	Land: Rolling. Soil: Clayloam, rocky and gravelly, 2d and 3d rate. Timber: Paloverde. Undergrowth: Greasewood, mesquite and cacti.
-----	
	From the cor. of secs. 13, 18, 19 and 24, on W. bdy. of Tp., hereinbefore described.
	S.89°39'E. on true line bet. sec. 18 and 19. Over rolling land, thru scattering brush and timber.
31.12	Old winding road, bears NW. and SE.

Resurvey of the Subdivisions  
of  
T. 4 S., R. 9 E.

BOOK 3888

chains

40.41 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$  S 18  
S 19

1928

Raise a mound of stone 2 ft. base  $1\frac{1}{2}$  ft. high N. of cor.

80.12 The cor. of secs. 17, 18, 19 and 20.

Land: Rolling.  
Soil: Clayloam, rocky and gravelly, 2d and 3d rate.  
Timber: Paloverde.  
Undergrowth: Greasewood, mesquite and cacti.

N.0°19'W. on true line bet. secs. 17 and 18.  
Over nearly level land, thru scattering timber and brush.

40.04 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
S 18 | S 17  
1928

Raise a mound of stone 2 ft. base  $1\frac{1}{2}$  ft. high W. of cor.

65.17 Telegraph lines, extend NW. and SE.

65.93 Old Phoenix and Eastern R.R., bears N.38°50'W. and S.38°50'E.

80.08 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for cor. of secs. 7, 8, 17 and 18, with brass cap marked

T 4 S R 9 E  
S 7 | S 8  
S 18 | S 17

1928

Raise a mound of stone 2 ft. base  $1\frac{1}{2}$  ft. high W. of cor.

Land: Nearly level.  
Soil: Clayloam, rocky and gravelly, 2d and 3d rate.  
Timber: Paloverde.  
Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 8, 9, 16 and 17.  
N.89°40'W. on true line bet. secs. 8 and 17.  
Over nearly level land, thru scattering brush and timber.

39.78 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$  S 8  
S 17

1928

Raise a mound of stone 2 ft. base  $1\frac{1}{2}$  ft. high N. of cor.

79.56 The cor. of secs. 7, 8, 17 and 18.

Resurvey of the Subdivisions  
of  
T. 4 S., R. 9 E.

Chains

Land: Nearly level.  
Soil: Clayloam, gravelly, 2d rate.  
Timber: Paloverde.  
Undergrowth: Greasewood, mesquite and cacti.

on W. bdy. of Tp.,  
From the cor. of secs. 7, 12, 13 and 18, hereinbefore described.  
S. 89° 39' E. on true line bet. secs. 7 and 18.  
Over rolling land, thru scattering brush and timber.

36.50 Foot of low rolling lava hills, bears N. and S., continue over level land.

40.08 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

$$\frac{1}{4} \begin{array}{c} S 7 \\ S 18 \end{array}$$

1928

Raise a mound of stone 2 ft. base  $1\frac{1}{2}$  ft. high N. of cor.

62.50 Old winding road, bears NW. and SE.

66.90 Telegraph lines, extend NW. and SE.

67.62 ~~Old~~ Phoenix and Eastern R.R., bears NW. and SE.

79.92 The cor. of secs. 7, 8, 17 and 18.

Land: Rolling and level.  
Soil: Clayloam, rocky and gravelly, 2d and 3d rate.  
Timber: Paloverde.  
Undergrowth: Greasewood, mesquite and cacti.

N. 0° 30' W. on true line bet. secs. 7 and 8.  
Over level land, thru scattering timber and brush.

40.04 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

$$\frac{1}{4} \begin{array}{c} S 7 | S 8 \end{array}$$

1928

Raise a mound of stone 2 ft. base  $1\frac{1}{2}$  ft. high W. of cor.

80.08 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for cor. of secs. 5, 6, 7 and 8, with brass cap marked

$$\begin{array}{c} T 4 S R 9 E \\ S 6 | S 5 \\ S 7 | S 8 \end{array}$$

1928

Raise a mound of stone 2 ft. base  $1\frac{1}{2}$  ft. high W. of cor.

Land: Level.  
Soil: Clayloam, gravelly and sandy, 2d rate.  
Timber: Paloverde.  
Undergrowth: Greasewood, mesquite and cacti.


Resurvey of the Subdivisions  
of  
T. 4 S., R. 9 E.

BOOK 3838

chains

From the cor. of secs. 4, 5, 8 and 9.  
N. 89° 39' W. on true line bet. secs. 5 and 8.  
Over level land, thru scattering brush and timber.

39.93 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground  
for 1/4 sec. cor., with brass cap marked



1928

Raise a mound of stone 2 ft. base 1 1/2 ft. high N. of cor.


79.86 The cor. of secs. 5, 6, 7 and 8.

Land: Level.  
Soil: Clayloam and sandy, 1st and 2d rate.  
Timber: Paloverde.  
Undergrowth: Greasewood, mesquite and cacti.

-----  
From the cor. of secs. 1, 6, 7 and 12, on W. bdy. of Tp.,  
hereinbefore described.  
S. 89° 35' E. on true line bet. secs. 6 and 7.  
Over level land, thru scattering brush and timber.

- 1.20 Old winding road, bears NW. and SE.
- 1.90 Telegraph lines, extend NW. and SE.
- 2.60 Old Phoenix and Eastern R.R., bears NW. and SE.

39.65 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground  
for 1/4 sec. cor., with brass cap marked



1928


Raise a mound of stone 2 ft. base 1 1/2 ft. high N. of cor.

79.49 The cor. of secs. 5, 6, 7 and 8.

Land: Level.  
Soil: Clayloam, sandy, 2d rate.  
Timber: Scattering paloverde.  
Undergrowth: Greasewood, mesquite and sage.

-----  
N. 0° 20' W. on true line bet. secs. 5 and 6.  
Over level land, thru scattering brush and timber.

40.04 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground  
for 1/4 sec. cor., with brass cap marked



1928

Raise a mound of stone 2 ft. base 1 1/2 ft. high W. of cor.

80.27 The cor. of secs. 5, 6, 31 and 32, on N. bdy. of Tp., here-  
inbefore described.

Land: Level. Soil: Sandy clayloam, 2d rate.  
Timber: Paloverde.  
Undergrowth: Greasewood, mesquite and sage.

-----

Resurvey of the Subdivisions  
of  
T. 4 S., R. 9 E.

chains

The continued satisfactory adjustment of the solar apparatus of the instruments used in the execution of the resurveys described in the foregoing notes is indicated from field test of said instruments described in Book "G" of this group.

GENERAL DESCRIPTION

This township is situated in the valley of the Gila River, said river having its course WSW, thru the south tier of sections. The surface of the immediate Gila River valley is generally level, 3d and 4th tiers of sections are rolling land, and 5th and 6 tiers of sections are level or nearly level.

The drainage is all into the Gila River, southerly. A small canal, about 15 lks. wide and 1 to 2 feet deep, has a westerly course thru the township, on the north of the Gila River wash. Water in the Gila River is underground except at intermittent points and in stormy periods.

The soil is a clayloam, 1st and 2d rate in the valley of the southern part, 3d rate and rocky and gravelly clayloam in the rolling land of the central portion, and 2d rate gravelly clayloam in the northern partion.

There are a few cottonwood trees in the southern part of the township, near the Gila River, central and northern part has a scattering growth of paloverde and a few ironwood trees. Undergrowth is scattering and consists of greasewood, mesquite and cacti, with a little sage.

The only cleared land, or land under cultivation is in the 1st and 2d tiers of sections.

There are no indications of mineral activity.

A spur line of the Ariz. Eastern Railroad bears E. thru Florence to Christmas, and W. to the main line, thru the 2d tier of sections. The old Phoenix and Eastern Railroad bears Northwest and southeast, to join this line in sec. 28. The station buildings of the city of Florence are in sec. 25. The north part of the city of Florence, proper is in the SW $\frac{1}{4}$  sec. 36 and SE $\frac{1}{4}$  sec. 35.

Highway No. 80, bears Northerly to Phoenix and Southerly to Florence, thru the east range of sections, while the Hunt Highway bears W. to Phoenix and E. to a junction with Highway No 80, paralleling the Ariz. Eastern Railroad.

4-680

BOOK 3838

FIELD ASSISTANTS.

NAMES.	CAPACITY.
<u>To Roger F. Wilson</u>	
Howard Beard	First chairman.
Robert Depue	Second chairman
Ben Randall	Axman
Mark Anderson	Flagman
Clair Pierson	Cornerman
<u>Otis O. Gould</u>	
Fred Pender	First chairman
Earl Endicott	Second chairman
Glenn Thomas	Flagman
M.E. Brassfield	Cornerman

BOOK 3838

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Roger F. Wilson U.S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer, for Group 150 Arizona bearing date of the 5th day of January, 1928, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, <sup>re</sup> surveyed all those parts or portions of \_\_\_\_\_

the North Boundary

and

Subdivision Lines of \_\_\_\_\_

Township 4 South Range 9 East of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said <sup>re</sup> survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer, for Group 150, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such <sup>re</sup> survey.

Place: Phoenix, Arizona.

Date: June 2, 1928

*Roger F. Wilson*  
 \_\_\_\_\_  
 U.S. Transitman

~~APPROVAL~~

~~OFFICE OF THE UNITED STATES SURVEYOR GENERAL,~~

~~19~~

~~The foregoing field notes of the survey of \_\_\_\_\_~~

~~executed by \_\_\_\_\_~~

~~under his special instructions dated \_\_\_\_\_, 19\_\_\_\_, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.~~

~~U. S. Surveyor General.~~

~~I certify that the foregoing transcript of the field notes of the above-described surveys in \_\_\_\_\_~~

~~\_\_\_\_\_ has been correctly copied from the original notes on file in this office.~~

~~U. S. Surveyor General.~~

BOOK 3838

4-680

**FIELD ASSISTANTS.**

NAMES.	CAPACITY.
<i>See Page 43 hereof</i>	



BOOK 3838

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Otis O. Gould U.S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer, for Group 150 Arizona bearing date of the 5th day of January, 1928, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, <sup>re</sup> surveyed all those parts or portions of \_\_\_\_\_

\_\_\_\_\_ the West Boundary,


\_\_\_\_\_ North Boundary

\_\_\_\_\_ and \_\_\_\_\_

\_\_\_\_\_ Subdivision Lines of \_\_\_\_\_

\_\_\_\_\_ Township 4 South Range 9 East \_\_\_\_\_ of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said <sup>re</sup> survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer, for Group 150, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such <sup>re</sup> survey.

Place: Phoenix, Arizona.

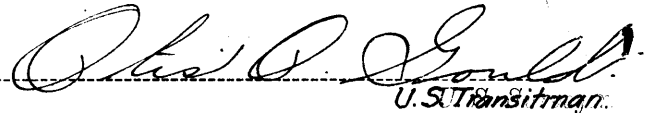  
 U.S. Transitman.

Date: May 12, 1928.

APPROVAL.

OFFICE OF U.S. SUPERVISOR OF SURVEYS,

Denver, Colo., JUL 15 1928, 192

The foregoing field notes of the <sup>re</sup> survey of \_\_\_\_\_

\_\_\_\_\_ the West Boundary

\_\_\_\_\_ North Boundary

\_\_\_\_\_ and \_\_\_\_\_

\_\_\_\_\_ Subdivision Lines of \_\_\_\_\_

\_\_\_\_\_ Township 4 South Range 9 East \_\_\_\_\_

\_\_\_\_\_ of the Gila and Salt River Base and Meridian, in the State of Arizona executed by Roger F. Wilson and Otis O. Gould, U.S. Transitmen under the special instructions dated January 5, 1928 for Group 150 Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the <sup>re</sup> surveys they describe, are hereby approved.

  
 U.S. Supervisor of Surveys.

~~I certify that the foregoing transcript of the field notes of the above described surveys in \_\_\_\_\_~~  
~~\_\_\_\_\_ has been correctly copied from the original notes on file in this office.~~