

1

FIELD NOTES

BOOK 3841

OF THE RESURVEY TOE

South Boundary

West Boundary

and

Subdivision Lines of

Township 6 South, Range 7 East

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

Dupree R. Averill, U.S. Surveyor

In the capacity of U. S. Surveyor, under Special Instructions dated February 18, 1928, issued by the District Cadastral Engineer to govern surveys included in Group No. 150 Arizona, which were approved by the Commissioner of the General Land Office, March 8, 1928, and Assignment Instructions dated March 10, 1928.

Resurvey commenced March 23, 1928


Resurvey completed April 6, 1928

3841

~~INDEX DIAGRAM.~~

Township

Range

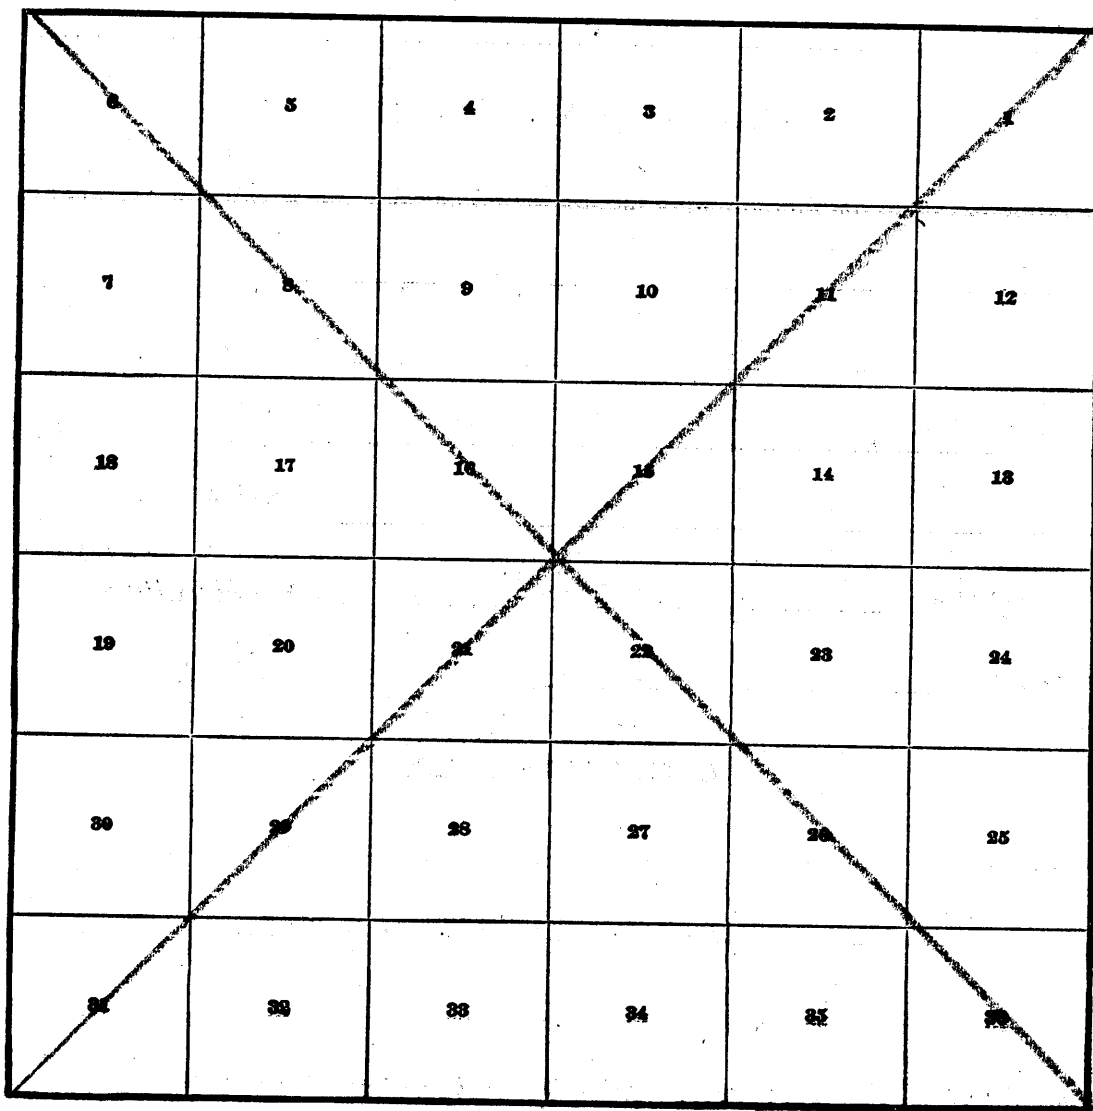


1A

Book "H"
 Group 150 Arizona
 Township 6 South Range 7 East

INDEX DIAGRAM

BOOK 3841

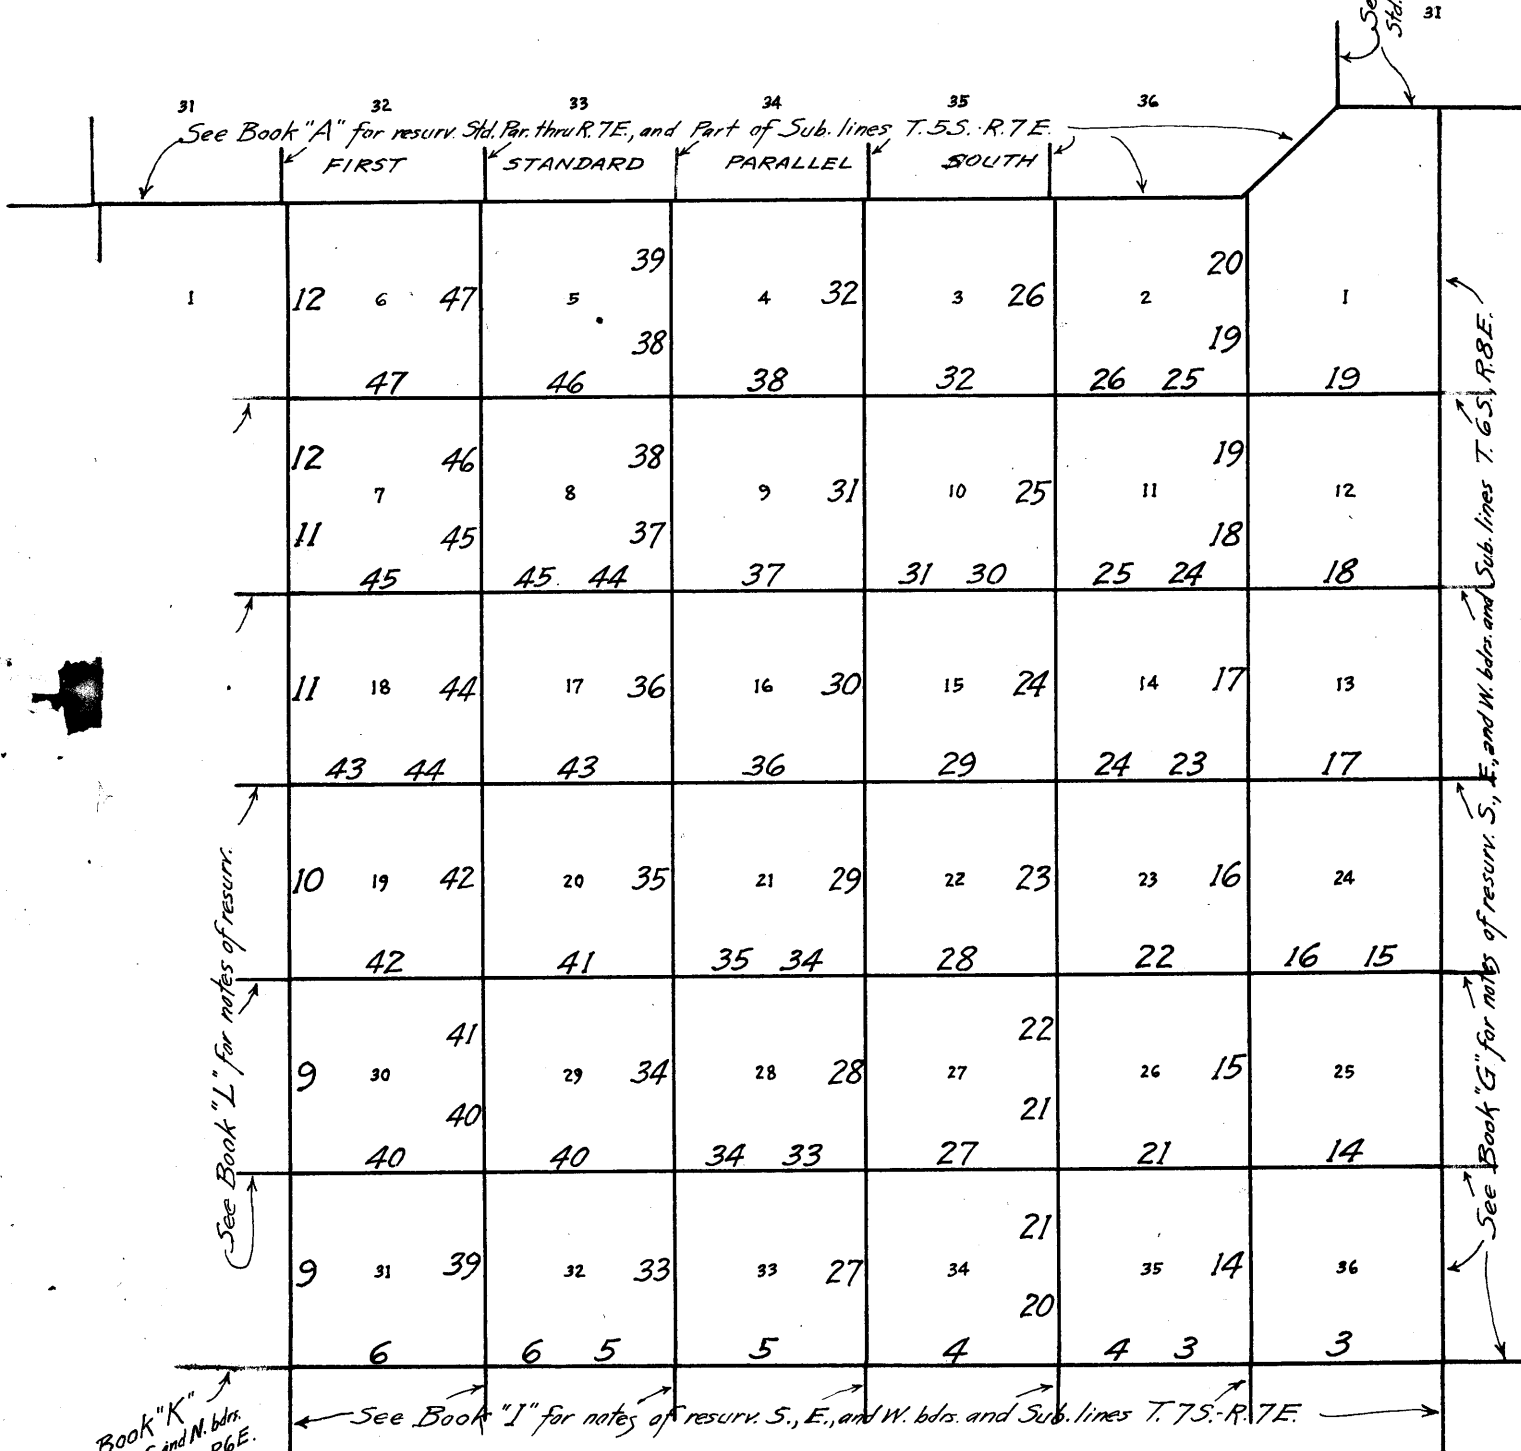

- Resurveyed by Dupree R. Averill, U.S. Surveyor, under instructions Group 150.
- Resurveyed by Roger F. Wilson, U.S. Transitman, under instructions Group 150.
- Resurveyed by Otis O. Gould, U.S. Transitman, under instructions Group 150.
- Accepted surveys, retracements and resurveys.

The resurveys herein described were commenced March 23, 1928, and executed by Dupree R. Averill, U.S. Surveyor, using Buff solar transit No. 17992. This instrument is equipped with Smith solar attachment and otherwise conforms to the standard requirements of the General Land office. Unless otherwise specified all azimuth determinations are accomplished with the solar attachment.

PRELIMINARY FIELD TEST
of
Buff Transit No. 17992
by
Dupree R. Averill, U.S. Surveyor.

March 25, 1928: at the station near the center of sec. 29, T.6 S., R.6 E., G. and S.R. Base and Meridian, Arizona, latitude $32^{\circ}52'N$. and longitude $111^{\circ}45'W$., and on the meridian established by Polaris observation January 28th, described in Book A, Page 1; examine the adjustments of the instrument and find no errors; then to test the workings of the solar apparatus proceed as follows:

At 9h 0m a.m. app.t., set off $32^{\circ}52'$ on the latitude arc, $1^{\circ}55'N$. on the declination arc and determine a meridian with the solar which agrees with the true meridian.

At app. noon, with latitude arc unchanged, observe the sun on the meridian; the resultant reading of the declination arc is $1^{\circ}58'N$., which agrees with the computed declination of the sun.

At 3h 0m p.m., app.t., with the latitude arc unchanged, set off $2^{\circ}01'N$. on the declination arc and determine a meridian with the solar which agrees with the true meridian.

As all of the observations taken during the usual hours of solar work agree within 1' of the true meridian, conclude that the instrument is in adjustment.

There are no slope angles of sufficient degree to necessitate the use of a clinometer.

All measurements are made with a Lallie steel tape 5 chs. in length, compared with a Lufkin standard and found correct.

Resurvey of the South Boundary
of
T. 6 S., R. 7 E.

chains

The south boundary of this township was surveyed in 1887 by R. C. Powers, U.S.D.S.

There is no resurvey or retracement of the south boundary of this township of record.

The following notes describe a dependent resurvey of the S. bdy. of T. 6 S., R. 7 E., preserving the alinement between orig. cors. or accepted points for cors. as determined from collateral evidence, or local cors.

Retracement for Resurvey

From the point for cor. of Ts. 6 and 7 S., Rs. 7 and 8 E., described in book "G".

West on a random line bet. secs. 1 and 36.

40.00 Find no trace of $\frac{1}{4}$ sec. cor. Set temp. cor.

80.44 Intersect accepted point for cor. of secs. 1, 2, 35 and 36.

Thence, west on a random line bet. secs. 2 and 35.

40.00 Find no trace of $\frac{1}{4}$ sec. cor. Set temp. cor.

80.44 Fall 28 lks. S. of the cor. of secs. 2, 3, 34 and 35.

Thence, west on a random line bet. secs. 3 and 34.

40.15 Fall 3 lks. N. of accepted point for $\frac{1}{4}$ sec. cor.

80.30 Fall 7 lks. N. of accepted point for cor. of secs. 3, 4, 33 and 34.

Thence, west on a random line bet. secs. 4 and 33.

40.00 Find no trace of $\frac{1}{4}$ sec. cor. Set temp. cor.

80.70 Fall 21 lks. S. of the accepted point for cor. of secs. 4, 5, 32 and 33.

Thence, west on a random line bet. secs. 5 and 32.

40.00 Find no trace of $\frac{1}{4}$ sec. cor. Set temp. cor.

80.50 Fall 21 lks. S. of the accepted point for cor. of secs. 5, 6, 31 and 32.

Thence, west on a random line bet. secs. 6 and 31.

40.00 Find no trace of $\frac{1}{4}$ sec. cor. Set temp. cor.

79.35 Fall 21 lks. S. of the cor. of Ts. 6 and 7 S., Rs. 6 and 7 E., hereinafter described.

Resurvey of the South Boundary
of
T. 6 S., R. 7 E.

BOOK 3841

chains

Resurvey

From the point for cor. of T. 6 and 7 S., Rs. 7 and 8 E., described in book "G".

West on a true line bet. secs. 1 and 36.

Over level land, along improved road, thru brush.

40.22 Point for $\frac{1}{4}$ sec. cor. falls in improved road, a place not suitable for reestablishment of permanent cor. monument.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground, for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4}$ S 36
S 1
1928

and WC in quadrants of brass caps nearest point for cor. Cor. of fences extending E., W. and S. bears S., 45 lks. dist.

60.18 Intersection of lane extending S. from road extending E. and W.

78.00 A school house bears N., about 2 $\frac{1}{2}$ chs. dist.

80.00 Cor. of fences extending N. and E. bears N., 45 lks. dist.; cor. of fences extending S. and E. bears S., 45 lks. dist.

80.44 Accepted point for cor. of secs. 1, 2, 35 and 36, determined from collateral evidence, i.e., intersection of roads extending N., S., E. and W. and property fencing to NE. and SE.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground for wit. cors. to cor. of secs. 1, 2, 35 and 36, with brass caps marked

T 6 S R 7 E
S 35 | S 36
S 2 | S 1
T 7 S
1928

and WC in quadrants of brass caps nearest point for cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

From point for cor. of secs. 1, 2, 35 and 36.

N.89°48'W. on true line bet. secs. 2 and 35.

Over level land, along center line of improved road, thru scattering brush.

21.06 Cor. of fences extending N. and W. bears N., 46 lks. dist.

30.16 Cor. of fences extending S. and W. bears S., 25 lks. dist.

34.40 A house bears S. about 4 chs. dist.

35.40 A house bears N. about 3 $\frac{1}{2}$ chs. dist.

40.17 Cor. of fences extending E., W. and S. bears S., 22 lks. dist.

40.22 Point for $\frac{1}{4}$ sec. cor. falls in center line of improved road.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4}$ S 35
S 2
1928

and WC in quadrants of brass caps nearest point for cor.

4.

Resurvey of the South Boundary
of
T. 6 S., R. 7 E.

chains

Cor. of fences extending E., W. and N. bears N., 46 lks. dist.
62.90 A house bears N., 1½ chs. dist.

79.98 Cor. of fences extending N. and E. bears N., 47 lks. dist.;
cor. of fences extending S. and E. bears S., 47 lks. dist.

80.44 The cor. of secs. 2, 3, 34 and 35, which is a mesquite stake
4 ins. sq., 12 ins. long, buried 12 ins. under ground
at intersection of improved road bearing E. and W. and
unimproved road bearing N. and S. Scribe marks on stake
are visible but not legible.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam. 33
ins. in ground for wit. cors. to cor. of secs. 2, 3, 34
and 35, with brass caps marked

T 6 S R 7 E
S 34 | S 35
S 3 | S 2
T 7 S
1928

and WC in quadrants of brass caps nearest the corner.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

Thence, S.89°57'W. on true line bet. secs. 3 and 34.
Over level land, along center line of improved road, thru
scattering brush.

.46 Cor. of fences extending S. and W. bears S., 47 lks. dist.;
cor. of fences extending N. and W. bears N., 47 lks. dist.
10.50 A house bears N. 2½ chs. dist.
13.35 Well and water tank bear N., 3½ chs. dist.

40.15 Accepted point for ¼ sec. cor., determined from collateral
evidence, i.e., center line of improved road extending
E. and W. and property fences extending N. and S.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to ¼ sec. cor., with brass
caps marked

¼ S 34
S 3
1928

and WC in quadrants of brass caps nearest point for cor.
Cor. of fences extending E., W. and N. bears N., 45 lks. dist.
Cor. of fences extending S. and E. bears S., 45 lks. dist.

80.30 Accepted point for cor. of secs. 3, 4, 33 and 34, determined
from collateral evidence, i.e., center line of improved
road extending E. and W. and property fence cor. to NW.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to cor. of secs., 3, 4,
33 and 34, with brass caps marked

T 6 S R 7 E
S 33 | S 34
S 4 | S 3
T 7 S
1928

Resurvey of the South Boundary
of
T. 6 S. R. 7 E.

BOOK 2847

chains

and WC in quadrants of brass caps nearest point for cor.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

From point for cor. of secs. 3, 4, 33 and 34.
N. 89° 51' W. on true line bet. secs. 4 and 33.
Over level land, along center line of improved road, thru
scattering brush.

.46 Cor. of fences extending N. and W. bears N., 45 lks. dist.
20.10 Cor. of fences extending N. and E. bears N., 45 lks. dist.

40.35 Point for $\frac{1}{4}$ sec. cor. falls in improved road, extends E. and W.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass
caps marked

$\frac{1}{4}$ S 33
 $\frac{1}{4}$ S 4
1928

and WC in quadrants of brass caps nearest point for cor.

45.00 Casa Grande Florence Canal, 20 lks. wide, course NW., from
NE., bears N. about 5 chs. dist.

80.70 Accepted point for cor. of secs. 4, 5, 32 and 33, determined
from collateral evidence, i.e., center line of improved
road extending E. and W. and property fence extending S.
(at intersection of improved road extending S.)
At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to cor. of secs. 4, 5, 32
and 33, with brass caps marked

T 6 S R 7 E
S 32 | S 33
S 5 | S 4
T 7 S
1928

and WC in quadrants of brass caps nearest point for cor.
Cor. of fences extending S. and W. bears S., 49 lks. dist.
and W., 45 lks. dist.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

From point for cor. of secs. 4, 5, 32 and 33,
N. 89° 51' W. on true line bet. secs. 5 and 32.
Over level land, along improved road, thru scattering brush.

40.25 Point for $\frac{1}{4}$ sec. cor. falls in improved road, bears E. and W.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass
caps marked

$\frac{1}{4}$ S 32
 $\frac{1}{4}$ S 5
1928

and WC in quadrants of brass caps nearest point for cor.

Resurvey of the South Boundary

of

T. 6 S., R. 7 E.

chains

Cor. of fences extending E. and S. bears S., 26 lks. dist.
Cor. of fences extending N. and W. bears N., 63 lks. dist.
Cor. pole of power lines extending E., W. and S. bears N., 58 lks. dist.


67.50 Casa Grande-Florence Canal, 20 lks. wide, course SW.

73.25 A well and pump house bear N., 2 chs. dist.

80.08 Cor. of fences extending N. and E. bears N., 45 lks. dist.;
cor. of fences extending S. and E. bears S., 45 lks. dist.

80.50 Accepted point for cor. of secs. 5, 6, 31 and 32, determined from collateral evidence, i.e., center line of improved road extending E. and W. at intersection of unimproved road extending N. and S., and property fence cors. to NE., SE., SW. and NW.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs., 5, 6, 31 and 32, with brass caps marked



and WC in quadrants of brass caps nearest point for cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.


Undergrowth: Greasewood, mesquite and sage.

From point for cor. of secs. 5, 6, 31 and 32.
N. 89° 51' W. on true line bet. secs. 6 and 31.
Over level land, along improved road, thru scattering brush.

.42 Cor. of fences extending S. and W. bears S., 45 lks. dist.,
cor. of fences extending N. and W. bears N., 45 lks. dist.

40.40 Point for 1/4 sec. cor. falls in center of improved road,
extends E. and W.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to 1/4 sec. cor., with brass caps marked



and WC in quadrants of brass caps nearest point for cor.

78.90 Cor. of fences extending N. and E. bears N., 45 lks. dist.

79.00 Cor. pole of power lines extending E. and S. bears N., 35 lks. dist.

79.35 The cor. of Ts. 6 and 7 S., Rs. 6 and 7 E., which is a wooden hub buried 2 ins. under surface of improved road, extending E. and W. This is a local perpetuation of the original cor. point.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of T8., 6 and 7 S., Rs. 6 and 7 E., with brass caps marked

Resurvey of the South Boundary
of
T. 6 S., R. 7 E.

BOOK 3841

chains

T. 6 S		
R 6 E		R 7 E
S 36		S 31
S 1		S 6
T 7 S		
1928		

and WC in quadrants of brass caps nearest the corner.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.



Resurvey of the West Boundary

of

T. 6 S. R. 7 E.

chains

The west boundary of this township was surveyed in 1887 by R. C. Powers, U.S.D.S.

There is no resurvey or retracement of the West boundary of this township of record.

The following notes describe a dependent resurvey of the W. bdy. of T.6 S., R.7 E., preserving the alinement between orig. cors., accepted local cors. or accepted points for cors. as determined from collateral evidence, and reestablishing lost cors. and $\frac{1}{4}$ sec. cors. by direct proportion.

Retracement for Resurvey

From the cor. of Ts.6 and 7 S., Rs.6 and 7 E., hereinbefore described.

North on a random line bet. secs. 31 and 36.

40.00 Find no trace of $\frac{1}{4}$ sec. cor. Set temp. cor.

80.20 Fall 117 lks. W. of the cor. of secs. 25,30,31 and 36.

Thence, north on a random line bet. secs. 25 and 30.

40.00 Find no trace of $\frac{1}{4}$ sec. cor. Set temp. cor.

80.40 Fall 63 lks. W. of the cor. of secs. 19,24,25 and 30.

Thence, north on a random line bet. secs. 19 and 24.

40.13 Fall 23 lks. W. of the $\frac{1}{4}$ sec. cor.

80.30 Fall 47 lks. W. of accepted point for cor. of secs. 13, 18, 19 and 24.

Thence, north on a random line bet. secs. 13 and 18.

40.00 Find no trace of $\frac{1}{4}$ sec. cor., Set temp. cor.

79.94 Fall 51 lks. W. of the cor. of secs. 7,12,13 and 18.

Thence, north on a random line bet. secs. 7 and 12.

40.00 Find no trace of $\frac{1}{4}$ sec. cor. Set temp. cor.

80.00 Find no trace of cor. of secs. 1,6,7 and 12. Set temp. cor. Continue on random line bet. secs. 1 and 6.

120.00 Find no trace of $\frac{1}{4}$ sec. cor. Set temp. cor.

162.77 Fall 57 lks. W. of the closing cor. of Ts.6 S., Rs.6 and 7 E., hereinafter described,

Resurvey of the West Boundary
of
T. 6 S., R. 7 E.

BOOK 3841

chains	<p style="text-align: center;"><u>Resurvey</u></p> <p>From the cor. of T. 6 and 7 S., R. 6 and 7 E., hereinbefore described. N.0°50'E. on true line bet. secs. 31 and 36. Over level land, thru scattering brush.</p>
40.10	<p>Point for $\frac{1}{4}$ sec. cor. Falls in place subject to future grading for road, not suitable for permanent reestablishment of cor. monument.</p> <p>At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked</p> <div style="text-align: center;"> $\frac{1}{4}$ S 36 S 31 1928 </div> <p>and WC in quadrants of brass caps nearest point for cor.</p>
40.19	<p>Cor. of fences extending S. and E. bears E., 44 lks. dist.</p>
80.20	<p>The cor. of secs. 25, 30, 31 and 36, which is an iron pipe 1 in. diam., 6 ins. above ground. This cor. is a local perpetuation of the orig. point for cor.</p> <p>At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 25, 30, 31 and 36, with brass caps marked</p> <div style="text-align: center;"> T 6 S R 6 E R 7 E S 25 S 30 S 36 S 31 1928 </div> <p>and WC in quadrants of brass caps nearest the corner.</p> <p>Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: None. Undergrowth: Greasewood, mesquite and sage.</p>

	<p>N.0°27'E. on true line bet. secs. 25 and 30. Over level land, thru scattering undergrowth.</p>
.45	<p>Cor. of fences extending N. and W. bears W., 45 lks. dist.</p>
1.00	<p>A well bears W., 1 ch. dist.</p>
40.18	<p>Cor. of fences extending S. and W. bears W., 46 lks. dist.</p>
40.20	<p>Point for $\frac{1}{4}$ sec. cor. Falls in place subject to future grading for road.</p> <p>At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked</p> <div style="text-align: center;"> $\frac{1}{4}$ S 25 S 30 1928 </div> <p>and WC in quadrants of brass caps nearest point for cor.</p>
60.33	<p>Cor. of fences extending S. and W. bears W., 46 lks. dist.</p>
80.05	<p>Power line extends E. and W.</p>

Resurvey of the West Boundary
of

T. 6 S., R. 7 E.

chains

80.40 The cor. of secs. 19, 24, 25 and 30, which is a concrete hub in center line of Casa Grande-Florence highway, extending E. and W. This cor. is a perpetuation of the orig. point for cor., made by county highway engineers.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 19, 24, 25 and 30, with brass caps marked

T 6 S			
R 6 E	R 7 E		
S 24	S 19		
S 25	S 30		
1928			

and WC in quadrants of brass caps nearest the corner.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

N.0°20'E. on true line bet. secs. 19 and 24.
Over level land, thru scattering undergrowth.

.40 Telephone line extends E. and W.

.49 Cor. of fences extending N. and W. bears W., 49 lks. dist.
Cultivated land in sec. 24. Not cultivated in sec. 19.

21.40 Cor. of fences extending S. and W. bears W., 45 lks. dist.
N. end of cultivated land in sec. 24.
Continue along unimproved road.

40.13 The $\frac{1}{4}$ sec. cor., which is an iron post 1 in. diam., 6 ins. above ground. This cor. is a local perpetuation of the orig. point for cor.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4}$	
S 24	S 19
1928	

and WC in quadrants of brass caps nearest the corner.
Cor. of fences extending N. and E. bears E., 45 lks. dist.

79.85 Cor. of fences extending S. and E. bears E., 45 lks. dist.

80.30 Point for cor. of secs. 13, 18, 19 and 24, determined from collateral evidence, i.e., property fencing to S. and E.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 13, 18, 19 and 24, with brass caps marked

T 6 S			
R 6 E	R 7 E		
S 13	S 18		
S 24	S 19		
1928			

and WC in quadrants of brass caps nearest point for cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

Resurvey of the West Boundary
of
T. 6 S. R. 7 E.

BOOK 3841


chains

From point for cor. of secs. 13, 18, 19 and 24.
N.0°22'E. on true line bet. secs. 13 and 18.
Over level land, thru scattering undergrowth.

39.70 An unimproved road extends E. and W.

39.97 Point for 1/4 sec. cor. Falls in place subject to future
grading for road.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to 1/4 sec. cor., with brass
caps marked



and WC in quadrants of brass caps nearest point for cor.
Cor. of fences extending N. and W. bears W., 49 lks. dist.


41.00 A house bears W., about 5 chs. dist.

42.50 A house bears E., about 15 chs. dist.

59.92 Cor. of fences extending S. and W. bears W., 49 lks. dist.

79.94 The cor. of secs. 7, 12, 13 and 18, which is a mesquite
post, 6 ins. square, 3 ft. above ground, unmarked; along-
side is an iron post, 2 ins. diam., 6 ins. above ground.
This is a local perpetuation of the orig. point for cor.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to cor. of secs., 7, 12,
13 and 18, with brass caps marked



and WC in quadrants of brass caps nearest the corner.

Cor. of fences extending E. and N. bears E., 45 lks. dist.
Cor. of fences extending W. and N. bears W., 45 lks. dist.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.


N.0°12'E. on true line bet. secs. 7 and 12.
Over level land, thru scattering undergrowth, along un-
improved road.

10.87 Cor. of fences extending S. and E. bears E., 45 lks. dist.

18.90 Cor. of fences extending S. and W. bears W., 45 lks. dist.

40.39 Point for 1/4 sec. cor. Falls in place subject to future
grading for road.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to 1/4 sec. cor., with
brass caps marked



Resurvey of the West Boundary
of

T. 6 S., R. 7 E.

chains

and WC in quadrants of brass caps nearest point for cor. S. end of fence extending N. bears E., 70 lks. dist.

60.40 Cross to E. side of fence extending N.2°W. and S.2°E.

80.78 Point for cor. of secs. 1,6,7 and 12. Falls in place subject fo future grading for road.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground, for wit. cors. to cor. of secs. 1,6, 7 and 12, with brass caps marked

T 6 S
R 6 E | R 7 E
S 1 S 6

S 12 S 7
1928

and WC in quadrants of brass caps nearest point for cor.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

N.0°12'E. on true line bet. secs. 1 and 6.
Over level land, thru scattering undergrowth.
.98 N. end of fence extending S. bears W., 71 lks. dist.
25.30 Old road, bears NE. to Florence and SW. to Casa Grande.

40.39 Point for $\frac{1}{4}$ sec. cor. Falls in place subject to future grading for road.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4}$
S 1 | S 6
1928

and WC in quadrants of brass caps nearest point for cor.

41.99 Cor. of fences extending N. and E. bears E., 55 lks. dist.

81.99 The Closing cor. of Ts.6 S., Rs.6 and 7 E. on 1st Stand. Bar. S., at 53 lks. N.89°14'E. of stand. cor. of secs. 31 and 32, T.5 S., R.7 E. described in Book "A". Closing cor. is an iron post, 3 ft. long 3 ins. diam., 34 ins. in ground. In place of post, which is deposited alongside,

Set an iron post 3 ft. long 3 ins. diam., 35 ins. in ground for closing cor. of Ts.6 S., Rs.6 and 7 E., with brass cap marked

T 5 S R 7 E
S 32

S 1 S 6
R 6 E | R 7 E
T 6 S
C C
1928

At points S.45°E. and S.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the corner.

Land: Level. Soil: Clayloam, 1st and 2d rate.
No timber. Undergrowth: Greasewood, mesquite, sage.

T. 6 S., R. 7 E.

Boundaries of Township 6 South, Range 7 East.
 Latitudes, Departures and Closing Errors.

Lines designated	True Course	Distance	Latitudes		Departures	
			N.	S.	E.	W.
S. Boundary of Tp.	West	80.44				80.44
	N. 89° 48' W.	80.44	.28			80.44
	S. 89° 57' W.	80.30		.07		80.30
	N. 89° 51' W.	80.70	.21			80.70
	N. 89° 51' W.	80.50	.21			80.50
	N. 89° 51' W.	79.35	.21			79.35
W. bdy. of Tp.	N. 0° 50' E.	80.20	80.20		1.17	
	N. 0° 27' E.	80.40	80.40		.63	
	N. 0° 20' E.	80.30	80.30		.47	
	N. 0° 22' E.	79.94	79.94		.51	
	N. 0° 12' E.	80.78	80.78		.28	
	N. 0° 12' E.	81.99	81.99		.29	
N. bdy. of Tp. (1st Std. Par. S.)	N. 89° 14' E.	40.47	.54		40.47	
	S. 89° 46' E.	40.20		.16	40.20	
	S. 89° 32' E.	80.00		.63	80.00	
	S. 89° 39' E.	239.70		1.47	239.70	
	N. 50° 05' E.	51.75	33.21		39.69	
	N. 89° 38' E.	40.68	.26		40.68	
E. bdy. of Tp.	S. 0° 22' E.	115.12		115.12	.74	
	S. 0° 30' W.	80.30		80.30		.70
	S. 0° 35' W.	80.04		80.04		.81
	S. 0° 37' W.	79.90		79.90		.86
	S. 0° 28' W.	121.20		121.20		.99
	S. 0° 20' W.	40.20		40.20		.23
	Convergency					.47
Totals			518.53	519.11	485.30	485.32
				518.53		485.30
Error in Latitude			:	0.58	:	
Error in Departure			:		:	0.02

Resurvey of the Subdivisions
 of
 T. 6 S., R. 7 E.

The Subdivision lines of this township were surveyed in 1887 by R. C. Powers, U.S.D.S.

No retracement or resurvey of the subdivision lines of this township is of record.

The following notes describe a dependent resurvey of the subdivision lines of T. 6 S., R. 7 E., with restoration of all orig. cors., accepted local cors. or accepted points for cors., as determined from collateral evidence, and reestablishment by proper proportion of all lost cors.

Resurvey of the Subdivisions
of

T. 6. S. R. 7 E.

chains

From the cor. of secs. 1,2,35 and 36, on S. bdy. of Tp.,
hereinbefore described.
N.0°30'E. on true line bet. secs. 35 and 36.
Over level land, along unimproved road extending N., thru
scattering undergrowth.

40.02 Cor. of fences extending S. and E. bears E., 3 lks. dist.

40.33 Point for $\frac{1}{4}$ sec. cor. Falls in place subject to future
grading for road construction.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass
caps marked

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 35 \text{ | S } 36 \\ 1928 \end{array}$$

and WC in quadrants of brass caps nearest point for cor.
Winding road extending N. and S. bears W., 45 lks. dist.

75.70 Casa Grande-Florence Canal, 20 lks. wide, course W.

80.66 Point for cor. of secs. 25,26,35 and 36. Falls in place
subject to future grading for road and not suitable for
reestablishment of permanent cor. monument.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to cor. of secs. 25,26,35
and 36, with brass caps marked

$$\begin{array}{c} \text{T } 6 \text{ S } \text{R } 7 \text{ E} \\ \text{S } 26 \text{ | S } 25 \\ \text{S } 35 \text{ | S } 36 \\ 1928 \end{array}$$

and WC in quadrants of brass caps nearest point for cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

From the point for cor. of secs. 25,30,31 and 36, on E.
bdy. of Tp., described in book "G".

N.89°56'W. on true line bet. secs. 25 and 36.

Over level land, thru scattering undergrowth.

.20 Center line of road extending N. and S.

1.00 Ditch, course N. Transmission line extending W. bears N.

40.16 Point for $\frac{1}{4}$ sec. cor. At points N.45°E., S.45°E., S.45°W.
and N.45°W., 64 lks. dist., set iron posts, each 3 ft.
long 1 in. diam., 33 ins. in ground for wit. cors. to
 $\frac{1}{4}$ sec. cor., with brass caps marked

$$\begin{array}{c} \frac{1}{4} \text{ S } 25 \\ \frac{1}{4} \text{ S } 36 \\ 1928 \end{array}$$

and WC in quadrants of brass caps nearest point for cor.

40.19 Cor. of fences extending N. and W. bears N., 30 lks. dist.

44.00 Casa Grande-Florence canal, 20 lks. wide, course NW.

49.00 Same canal, 20 lks. wide, course SW. West end of trans-
mission line extending E. bears N., about 1 ch. dist.

A house bears N. about 3 chs. dist.

Resurvey of the Subdivisions
of
T. 6 S., R. 7 E.

BOOK 3841

chains

80.32 The point for cor. of secs. 25, 26, 35 and 36.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

From point for cor. of secs. 25, 26, 35 and 36.
N.0°26'E. on true line bet. secs. 25 and 26.
Over level land, thru scattering undergrowth.

.49 Cor. of old fences extending N. and W. bears W., 95 lks. dist.

40.33 Point for $\frac{1}{4}$ sec. cor.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4}$
S 26 | S 25
1928

And WC in quadrants of brass caps nearest point for cor.

Telephone line extends N. and S., directly over corner.
Road extending N. and S. bears W., 20 lks. dist.
Fence extending N. and S. bears W., 60 lks. dist.
43.50 Cor. of fences extending N., S. and W. bears W., 60 lks. dist.
68.50 A well and pump bears W., 2 chs. dist.
80.19 Cor. of fences extending S. and W. bears W., 58 lks. dist.
80.30 Transmission line extends E. and W.

80.66 The cor. of secs. 23, 24, 25 and 26, which is a concrete hub in center line of highway, extends E. to Florence and W. to Casa Grande, at intersection of unimproved roadway extending N. and S. This is a perpetuation by county road engineers of orig. point for cor.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 23, 24, 25 and 26, with brass caps marked

T 6 S R 7 E
S 23 | S 24
S 26 | S 25
1928

and WC in quadrants of brass caps nearest the corner.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 19, 24, 25 and 30, on E. bdy. of Tp., described in book "G".
S.89°26'W. on true line bet. secs. 24 and 25. (E $\frac{1}{2}$)
Over level land, along center line of Casa Grande-Florence highway, thru scattering undergrowth.

.45 Cor. of fences extending N. and W. bears N., 45 lks. dist.
40.40 Cor. of fences extending N., E. and W. bears N., 43 lks. dist.

40.82 The $\frac{1}{4}$ sec. cor., which is a concrete hub in center line

Resurvey of the Subdivisions
of
T. 6 S., R. 7 E.

chains

of Casa Grande-Florence highway, extends E. and W. This is a perpetuation by county road engineers of orig. point for $\frac{1}{4}$ sec. cor.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$$\begin{array}{r} \frac{1}{4} \text{ S } 24 \\ \hline \frac{1}{4} \text{ S } 25 \\ 1928 \end{array}$$

and WC in quadrants of brass caps nearest the corner.

Thence, N.89°34'W. on true line bet. secs. 24 and 25. (W $\frac{1}{2}$) Over level land, along center line of Casa Grande-Florence highway, thru scattering undergrowth.

39.47 The cor. of secs. 23, 24, 25 and 26.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

N.0°38'E. on true line bet. secs. 23 and 24.

Over level land, thru undergrowth, along unimproved road.

.47 Cor. of fences extending N. and W. bears W., 54 lks. dist.

Cor. of fences extending N. and E. bears E., 54 lks. dist.

39.57 Cor. of fences extending N., S. and E. bears E., 45 lks. dist.

40.11 Point for $\frac{1}{4}$ sec. cor. Falls in unimproved roadway.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$$\begin{array}{r} \frac{1}{4} \\ \text{S } 23 \text{ | } \text{S } 24 \\ 1928 \end{array}$$

and WC in quadrants of brass caps nearest point for cor.

79.76 Cor. of fences extending N., S. and W. bears W., 55 lks. dist.

Cor. of fences extending S. and E. bears E., 46 lks. dist.

Cor. of fences extending S. and W. bears W., 46 lks. dist.

80.22 The cor. of secs. 13, 14, 23 and 24, which is the remains of a mesquite stake, 4 ins. sq., 12 ins. long, buried in ground. No marks discernible. Alongside is an iron pipe 2 ins. diam., 6 ins. above ground.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 13, 14, 23 and 24, with brass caps marked

$$\begin{array}{r} \text{T } 6 \text{ S } \text{R } 7 \text{ E} \\ \text{S } 14 \text{ | } \text{S } 13 \\ \hline \text{S } 23 \text{ | } \text{S } 24 \\ 1928 \end{array}$$

And WC in quadrants of brass caps nearest the corner.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions
of
T. 6 S., R. 7 E.

BOOK 3841


chains

From the cor. of secs. 13, 18, 19 and 24, on E. bdy. of Tp., described in book "G".
S.89°33'W. on true line bet. secs. 13 and 24. (E½)
Over level land, thru scattering undergrowth. Cultivated land in sec. 13.

39.90

The ¼ sec. cor., which is a rotted stake ¼ ins. sq., 12 ins. long buried in ground. Alongside is an iron pipe 2 ins. diam., 6 ins. above ground.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to ¼ sec. cor., with brass caps marked



and WC in quadrants of brass caps nearest the cor.

Cor. of fences extending N. and E. bears N., 96 lks. dist.
Cor. of fences extending N. and W. bears N., 45 lks. dist.
Cor. of fences extending S. and W. bears S., 45 lks. dist.

Thence, N.89°13'W. on true line bet. secs. 13 and 24 (W½)
Over level land, thru scattering undergroth.

40.40

The cor. of secs. 13, 14, 23 and 24.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

N.0°51'E. on true line bet. secs. 13 and 14. (s½)
Over level land, thru undergrowth: along unimproved road.


.46

Cor. of fences extending N. and E. bears E., 46 lks. dist.

40.15

The ¼ sec. cor., which is an iron pipe 1 in. diam., 6 ins. above ground. This is a local perpetuation of orig. point for ¼ sec. cor.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to ¼ sec. cor., with brass caps marked



and WC in quadrants of brass caps nearest the corner.

Cor. of fences extending S. and E. bears E., 45 lks. dist.
Cor. of fences extending N. and W. bears W., 45 lks. dist.

Thence, N.0°19'E. on true line bet. secs. 13 and 14.
Over level land, thru undergrowth, along unimproved road.

1.00

39.77

A well and pump bears W., 1½ chs. dist.
Cor. of fences extending S. and W. bears W., 46 lks. dist.

40.22

Point for cor. of secs. 11, 12, 13 and 14, determined from collateral evidence, i.e., center line of cross roads extending N., S., E. and W., and property fence cors. to NW. and SW.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33

Resurvey of the Subdivisions
of

T. 6 S. R. 7 E.

chains

ins. in ground for wit. cors. to cor. of secs. 11,12,13 and 14, with brass caps marked

$$\begin{array}{c} \text{TP 6 S R 7 E} \\ \text{S 11 | S 12} \\ \text{S 14 | S 13} \\ \hline 1928 \end{array}$$

and WC in quadrants of brass caps nearest point for cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite, sage.

From the cor. of secs. 7,12,13 and 18, on E. bdy. of Tp., described in book "G".

N.89°37'W. on true line bet. secs. 12 and 13. (E. $\frac{1}{2}$)

Over level land,

.34 Telephone line extends N. and S.

.48 Fence extends N. and S.; continue over cultivated land.

40.02 The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. sq., 16 ins. above ground, marked $\frac{1}{4}$ S on N. side.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., Posts NE. and SE. set 42 ins. in ground, posts, NW. and SW. set 33 ins. in ground, for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$$\begin{array}{c} \frac{1}{4} \text{ S 12} \\ \hline \frac{1}{4} \text{ S 13} \\ 1928 \end{array}$$

and WC in quadrants of brass caps nearest the corner.

Cor. falls under fence extending N. and S., cultivated land to E., only.

Thence, N.89°37'W. on true line bet. secs. 12 and 13. (W. $\frac{1}{2}$)
Over level land, thru undergrowth.

40.32 The point for cor. of secs. 11,12,13 and 14.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

From point for cor. of secs. 11,12,13 and 14.

N.0°25'E. on true line bet. secs. 11 and 12.

Over level land, along unimproved road, thru undergrowth.

.45 Cor. of fences extending N. and W. bears W., 46 lks. dist.
6.70 A well and pump bears W., 4 chs. dist.

40.23 Point for $\frac{1}{4}$ sec. cor. Falls in unimproved roadway.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$$\begin{array}{c} \frac{1}{4} \\ \text{S 11 | S 12} \\ 1928 \end{array}$$

and WC in quadrants of brass caps nearest point for cor.

Resurvey of the Subdivisions
of
T. 6 S., R. 7 E.

BOOK 3841

chains

Cor. of fences extending N. and E. bears E., 49 lks. dist.
Cor. of fences extending N., S. and W. bears W., 43 lks. dist.

52.10 Well and pump bears W., 70 lks. dist.

80.00 Cor. of fences extending S. and E. bears E., 47 lks. dist.
Cor. of fences extending S. and W. bears W., 47 lks. dist.

80.46 Point for cor. of secs. 1, 2, 11 and 12, determined from collateral evidence, i.e., center line of roads extending N., S., E. and W., and property fence cors. to NE., SE. and SW.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 1, 2, 11, and 12, with brass caps marked

T 6 S R 7 E
S 2 | S 1
S 11 | S 12
1928

and WC in quadrants of brass caps nearest point for cor.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite, sage.

From the cor. of secs. 1, 6, 7 and 12, on E. bdy. of Tp., described in book "G".
N.89°30'W. on true line bet. secs. 1 and 12.
Over level land, along road, thru scattering undergrowth.

40.05 Point for 1/4 sec. cor. Distance determined from collateral evidence, i.e., property fencing extending to N. and S.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to 1/4 sec. cor., with brass caps marked

1/4 S 1
1/4 S 12
1928

and WC in quadrants of brass caps nearest point for cor.

Cor. of fences extending E., W. and N. bears N., 48 lks. dist.
Cor. of fences extending S. and W. bears S., 38 lks. dist.
Land in SW 1/4 sec. 1 is under improvement and cultivation.

80.45 Point for cor. of secs. 1, 2, 11 and 12.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

From point for cor. of secs. 1, 2, 11 and 12.
N.0°16'W. on true line bet. secs. 1 and 2.
Over level land, along improved roadway. Cultivated land in sec. 1, unimproved land, i.e., undergrowth in sec. 2.
Cor. of fences extending N. and E. bears E., 47 lks. dist.
Point for 1/4 sec. cor. Latitude determined from collateral evidence, i.e., property fencing extending E. and W.

46
40.24


At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.

Resurvey of the Subdivisions
of

T. 6 S. R. 7 E.

chains

dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked



and WC in quadrants of brass caps nearest point for cor.

Cor. of fences extending N., S. and E. bears E., 46 lks. dist.
Cor. of fences extending N. and W. bears W., 46 lks. dist.
Cultivated land to NW., NE. and SE.

41.50

A well bears W., 1 ch. dist.

43.50

A house bears W., 4 chs. dist.

80.67


Cor. of fences extending S. and E. bears E., 45 lks. dist.

Cor. of fences extending S. and W. bears W., 45 lks. dist.

81.12

Point for closing cor. of secs. 1 and 2 on 1st stand. Par. S., at .26 chs. N. 50° 05' E. of Angle point on S. bdy. of sec. 36, T. 5 S., R. 7 E., described in book "A". Point for closing cor. is determined from collateral evidence, i.e., center line of improved road extending S. and property fencing to SE. and SW. At point of intersection,

Set an iron post 3 ft. long 2 ins. diam., 42 ins. in ground for closing cor. of secs. 1 and 2, on 1st stand. par. S., with brass cap marked



At points S. 45° E., and S. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to the above closing cor., with brass caps similarly marked, with addition of WC in quadrants nearest the true corner.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 2, 3, 34 and 35, on S. bdy. of Tp., hereinbefore described.
N. 0° 28' E. on true line bet. secs. 34 and 35.
Over level land, along semi-improved roadway, thru brush.

20.30

Cor. of fences extending S. and W. bears W., 45 lks. dist.


40.21

Cor. of fences extending S. and E. bears E., 45 lks. dist.

40.33

Point for $\frac{1}{4}$ sec. cor. Falls in roadway.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked



and WC in quadrants of brass caps nearest point for cor.

Resurvey of the Subdivisions
of
T. 6 S. R. 7 E.

BOOK 3841

chains

60.51 Cor. of fences extending N. and E. bears E., 45 lks. dist.
80.21 Cor. of fences extending S. and E. bears E., 45 lks. dist.

80.66 The cor. of secs. 26, 27, 34 and 35, which is an iron pipe 2 ins. diam., 6 ins. above ground. This is a local perpetuation of the orig. point for corner.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs., 26, 27, 34 and 35, with brass caps marked

T 6 S R 7 E
S 27 | S 26
S 34 | S 35
1928

and WC in quadrants of brass caps nearest point for cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

S $\frac{1}{2}$ SE $\frac{1}{4}$ of sec. 34 is under cultivation.

From the point for cor. of secs. 25, 26, 35 and 36. N.89°50'W. on true line bet. secs. 26 and 35. Over level land, thru undergrowth.

.32 Telephone line extends N. and S.
.67 Center of road extending N. and S.
21.40 W. end of fence extending E. bears N., 40 lks. dist.

40.27 Point for $\frac{1}{4}$ sec. cor.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4}$ S 26
S 35
1928

and WC in quadrants of brass caps nearest point for cor.

40.37 Cor. of fences extending N. and W. bears N., 3 lks. dist.
45.00 Cor. of fences extending NW. and E. bears N., 5 lks. dist.
45.30 Road, bears NW. and E.
47.00 Casa Grande-Florence Canal, 25 lks. wide, course NW.

80.54 The cor. of secs. 26, 27, 34 and 35.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Mesquite, greasewood and sage.

N.0°29'E. on true line bet. secs. 26 and 27. Over level land, along roadway, thru undergrowth.

.50 Cor. of fences extending N. and W. bears W., 55 lks. dist.
6.70 Casa Grande-Florence Canal, 25 lks. wide, course SW.

40.38 Point for $\frac{1}{4}$ sec. cor. falls in roadway.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

Resurvey of the Subdivisions
of

T. 6 S. R. 7 E.

chains

$$\frac{1}{4}$$

S. 27	S. 26
1928	

and WC in quadrants of brass caps nearest point for cor.

- 40.88 Fence extending N. and S. bears E., 29 lks. dist.
 60.30 Cor. of fences extending N., S. and W. bears W., 59 lks. dist.
 80.31 A house bears W., 2 chs. dist.
 80.31 Cor. of fences extending S. and W. bears W., 52 lks. dist.
 80.41 Cor. of fences extending S. and E. bears E., 45 lks. dist.
 80.41 Transmission line, bears E. and W.
 80.76 The cor. of secs. 22, 23, 26 and 27, which is a concrete hub buried under surface of graded highway, extends W. to Casa Grande and E. to Florence, at intersection of unimproved road extending N. and S. This is a perpetuation by county road engineers of orig. point for cor.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 22, 23, 26 and 27, with brass caps marked

T 6	S R	7 E
S 22	S 23	
S 27	S 26	
1928		

and WC in quadrants of brass caps nearest the corner.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Mesquite, greasewood and sage.

NE $\frac{1}{4}$ of sec. 27 is under cultivation.

From the cor. of secs. 23, 24, 25 and 26.
 N. $89^{\circ}28'$ W. on true line bet. secs. 23 and 26. ($E\frac{1}{2}$)
 Over level land, along center line of Casa Grande-Florence highway.

- 23.10 A house bears N., 6 chs. dist.
 39.24 A ditch, course N.
 40.23 Point for $\frac{1}{4}$ sec. cor., determined from collateral evidence, i.e., center line of highway extending E. and W.
 At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4}$ S 23	
$\frac{1}{4}$ S 26	
1928	

and WC in quadrants of brass caps nearest point for cor.

Thence, N. $89^{\circ}58'$ W. on true line bet. secs. 23 and 26. ($W\frac{1}{2}$)

- .24 Cor. of fences extending E., W. and S. bears S., 45 lks. dist.
 .39 Cor. of fences extending E., W. and N. bears N., 45 lks. dist.
 40.23 The cor. of secs. 22, 23, 26 and 27.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite, sage.

Resurvey of the Subdivisions
of
T. 6 S., R. 7 E.


BOOK 3841

chains

N.0°36'E. on true line bet. secs. 22 and 23. (S $\frac{1}{2}$)
Over level land, along unimproved roadway, thru undergrowth.
.46 Cor. of fences extending N. and E. bears E., 45 lks.dist.
20.03 Cor. of fences extending N. and W. bears W., 45 lks.dist.
26.00 Wash, course N.70°W.
31.50 Cor. pole of telephone line extending NW. and S. bears W.,
54 lks. dist.

40.13 The $\frac{1}{4}$ sec. cor., which is the remains of a mesquite stake,
4 ins. sq., 12 ins. long, buried in ground. No marks
discernible.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass
caps marked



and WC in quadrants of brass caps nearest the corner.


Cor. of fences extending S. and W. bears W., 45 lks.dist.
Cor. of fences extending N., S. and E. bears E., 45 lks.dist.

Thence, N.0°50'W. on true line bet. secs. 22 and 23. (N $\frac{1}{2}$)

39.81 Cor. of fences extending S. and E. bears E., 43 lks.dist.

40.29 The cor. of secs. 14, 15, 22 and 23, which is a decayed
mesquite stake, buried in ground. Alongside is an iron
pipe, 2 ins. diam., 6 ins. above ground.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to cor. of secs. 14, 15,
22 and 23, with brass caps marked




and WC in quadrants of brass caps nearest the corner.

- Land: Level.
- Soil: Clayloam, 1st and 2d rate.
- Timber: None.
- Undergrowth: Greasewood, mesquite and sage.

40.18 From the cor. of secs. 13, 14, 23 and 24.
N.89°37'W. on true line bet. secs. 14 and 23.
Over level land, thru scattering undergrowth, cultivated
land in sec. 23.

The $\frac{1}{4}$ sec. cor., which is an iron pipe 1 in. diam., 2 ins.
above ground. A local perpetuation of point for cor.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass
caps marked



and WC in quadrants of brass caps nearest the cor.

40.33 Cor. of fences extending E., W. and S. bears S., 48 lks.dist.

Resurvey of the Subdivisions
of

T. 6 S. R. 7 E.

chains

59.20 Cor. of fences extending E., W. and S. bears S., 46 lks. dist.

80.36 The cor. of secs. 14, 15, 22 and 23.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Mesquite, greasewood and sage.

N. 0° 40' E. on true line bet. secs. 14 and 15.
Over level land, thru undergrowth.

40.23 Point for $\frac{1}{4}$ sec. cor.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 15 \mid \text{S } 14 \\ 1928 \end{array}$$

and WC in quadrants of brass caps nearest point for cor.

80.46 The cor. of secs. 10, 11, 14 and 15, which is a pine post, 4 ins. sq., 12 ins. above ground, marked S 14 on SE., S 11 on NE., S 10 on NW. and S 15 on SW. side. This is a local perpetuation of the orig. point for cor.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 10, 11, 14 and 15, with brass caps marked

$$\begin{array}{c} \text{T } 6 \text{ S } \text{R } 7 \text{ E} \\ \text{S } 10 \mid \text{S } 11 \\ \text{S } 15 \mid \text{S } 14 \\ 1928 \end{array}$$

and WC in quadrants of brass caps nearest the corner.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Mesquite, greasewood and sage.

From point for cor. of secs. 11, 12, 13 and 14.
N. 89° 35' W. on true line bet. secs. 11 and 14.
Over level land, along roadway, between cultivated fields.

2.10 Ranch house bears N. about 3 chs. dist.

14.69 Cor. of fences extending E., W. and N. bears N., 45 lks. dist.
W. end of cultivation in sec. 11. Continue thru brush.

14.92 Cor. of fences extending E., W. and S. bears S., 45 lks. dist.

40.10 Cor. of fences extending S. and E. bears S., 45 lks. dist.
W. end of cultivation in sec. 14.

40.14 Point for $\frac{1}{4}$ sec. cor. Falls in roadway.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$$\begin{array}{c} \frac{1}{4} \text{ S } 11 \\ \text{S } 14 \\ 1928 \end{array}$$

and WC in quadrants of brass caps nearest point for cor.

Resurvey of the Subdivisions
of
T. 6 S., R. 7 E.

BOOK 3841

chains

Fence extending E. and W. bears N., 45 lks. dist.

80.28 The cor. of secs. 10, 11, 14 and 15.


Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

N.0°11'E. on true line bet. secs. 10 and 11. (S $\frac{1}{2}$)
Over level land, thru undergrowth.

.46 Cor. of fences extending N. and E. bears E., 46 lks. dist.
Cor. of fences extending N. and W. bears W., 46 lks. dist.

40.20 The $\frac{1}{4}$ sec. cor., which is a decayed mesquite stake, 4 ins. sq, 12 ins. long, 4 ins. under surface of ground. No marks discernible.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked



and WC in quadrants of brass caps nearest the corner.


Cor. of fences extending N., S. and E. bears E., 45 lks. dist.
Cor. of fences extending N., S. and W. bears W., 45 lks. dist.

Thence, N.0°25'E. on true line bet. secs. 10 and 11. (N $\frac{1}{2}$)

39.77 Cor. of fences extending S. and E. bears E., 45 lks. dist.
Cor. of fences extending S. and W. bears W., 45 lks. dist.

40.24 Point for cor. of secs. 2, 3, 10 and 11, determined from collateral evidence, i.e., center line of road extending E. and W. and property fence cors to SE. and SW.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 2, 3, 10 and 11, with brass caps marked



and WC in quadrants of brass caps nearest point for cor.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Mesquite, greasewood and sage.

From point for cor. of secs. 1, 2, 11 and 12.
N.89°50'W. on true line bet. secs. 2 and 11. (E $\frac{1}{2}$)
Over level land, along unimproved road., thru undergrowth.

40.02 The $\frac{1}{4}$ sec. cor., which is a decayed mesquite stake 4 ins. square, 12 ins. long, 4 ins. under ground in center of roadway extending E. and W. No marks discernible.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33

Resurvey of the Subdivisions

of

T. 6 S., R. 7 E.

chains

ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$$\begin{array}{c} \frac{1}{4} \text{ S } 2 \\ \hline \frac{1}{4} \text{ S } 11 \\ 1928 \end{array}$$

and WC in quadrants of brass caps nearest the corner.

Cor. of fences extending $\text{S.} \frac{E.}{/}$ and W. bears S., 45 lks. dist.

Thence, N. $89^{\circ}10'W.$ on true line bet. secs. 2 and 11. ($W \frac{1}{2}$)
Over level land, along roadway, thru undergrowth.

3.50 A house bears S. about 8 chs. dist.

40.52 The point for cor. of secs. 2, 3, 10 and 11.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

From point for cor. of secs. 2, 3, 10 and 11.
N. $0^{\circ}10'E.$ on true line bet. secs. 2 and 3.
Over level land, thru undergrowth, along winding road.

11.17 Wash, 15 lks. wide, course NW.

13.00 Same wash, 15 lks. wide, course NE.

26.30 Wash, 30 lks. wide, course NW.

40.18 Point for $\frac{1}{4}$ sec. cor.

At points N. $45^{\circ}E.$, S. $45^{\circ}E.$, S. $45^{\circ}W.$ and N. $45^{\circ}W.$, 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 3 \quad | \quad \text{S } 2 \\ 1928 \end{array}$$

and WC in quadrants of brass caps nearest point for cor.

60.78 Cor. of fences extending N. and W. bears W., 47 lks. dist.
Cor. of fences extending S. and W. bears W., 45 lks. dist.

80.56 Intersect the 1st stand. Par. S. at 15 lks. S. $89^{\circ}39'E.$ of the stand. cor. of secs. 35 and 36, T. 5 S., R. 7 E., described in book "A". At point of intersection,

Set an iron post 3 ft. long 2 ins. diam., 40 ins. in ground, for closing cor. of secs. 2 and 3, with brass cap marked

$$\begin{array}{c} \text{T } 5 \text{ S } \text{R } 7 \text{ E} \\ \text{S } 36 \\ \hline \text{S } 3 \quad | \quad \text{S } 2 \\ \text{T } 6 \text{ S } \text{R } 7 \text{ E} \\ \text{C } \text{C} \\ 1928 \end{array}$$

and

At points S. $45^{\circ}E.$ / S. $45^{\circ}W.$, 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the corner.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Mesquite, greasewood and sage.

Resurvey of the Subdivisions
of
T. 6 S. R. 7 E.

BOOK 8841


chains

From point for cor. of secs. 3, 4, 33 and 34, on S. bdy. of Tp., hereinbefore described.
N. 0° 15' E. on true line bet. secs. 33 and 34.
Over level land, thru undergrowth.

33.30 Casa Grande-Florence canal, 25 lks. wide, course S. 75° W.

40.46 Point for 1/4 sec. cor.


At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to 1/4 sec. cor., with brass caps marked



60.90 and WC in quadrants of brass caps nearest point for cor. S. end of fence extending N.

80.47 Cor. of fences extending S. and W. bears W., 45 lks. dist.
80.92 The cor. of secs. 27, 28, 33 and 34, which is a rotted mesquite stake 4 ins. sq, 6 ins. long, buried 4 ins. under ground, alongside is an iron pipe 2 ins. diam., 6 ins. above ground. No marks discernible on stake or pipe.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 27, 28, 33 and 34, with brass caps marked



and WC in quadrants of brass caps nearest the corner.


Land: Level.
Soil: Clayloam, 1st and 2 d rate.
Timber: None.
Undergrowth: Mesquite, greasewood and sage.

From the cor. of secs. 26, 27, 34 and 35.
N. 89° 53' W. on true line bet. secs. 27 and 34.
Over level land, thru undergrowth; cultivated land in SE 1/4 sec. 27, only.

4.50 Casa Grande-Florence Canal, 25 lks. wide, course S.

40.28 Point for 1/4 sec. cor.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to 1/4 sec. cor., with brass caps marked



40.93 and WC in quadrants of brass caps nearest point for cor. Cor. of fences extending N. and E. bears N., 45 lks. dist. A ditch, course N.

80.56 The cor. of secs. 27, 28, 33 and 34.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite, sage.

Resurvey of the Subdivisions
of
T. 6 S., R. 7 E.

chains

	N.0°33'E. on true line bet. secs. 27 and 28. Over level land, thru undergrowth, on unimproved roadway.
.45	Cor. of fences extending N. and W. bears W., 45 lks. dist.
40.30	Point for $\frac{1}{4}$ sec. cor.; falls in roadway. At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked $\begin{array}{c} \frac{1}{4} \\ \hline S\ 28\ \ S\ 27 \\ \hline 1928 \end{array}$ and WC in quadrants of brass caps nearest point for cor.
80.25	Cor. of fences extending S. and W. bears W., 51 lks. dist. Transmission line, extends E. and W.
80.60	The cor. of secs. 21, 22, 27 and 28, which is a concrete hub 4 ins. under surface of graded highway, extends E. to Florence and W. to Casa Grande. This cor. is a perpetuation of orig. point for cor. as made by county highway engineers. At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 21, 22, 27 and 28, with brass caps marked $\begin{array}{c} T\ 6\ S\ R\ 7\ E \\ \hline S\ 21\ \ S\ 22 \\ \hline S\ 28\ \ S\ 27 \\ \hline 1928 \end{array}$ and WC in quadrants of brass caps nearest the corner. Land: Level. Soil: Clayloam, 1st and 2d rate. Undergrowth: Mesquite, greasewood, sage. Timber: None.
	----- From the cor. of secs. 22, 23, 26 and 27. S.89°56'W. on true line bet. secs. 22 and 27. Over level land, along center line of Casa Grande-Florence highway, thru undergrowth.
20.20	Cor. of fences extending S. and E. bears S., 45 lks. dist.
	Cor. of fences extending N. and W. bears N., 45 lks. dist.
39.89	Cor. of fences extending N. and E. bears N., 48 lks. dist.
40.22	Point for $\frac{1}{4}$ sec. cor.; falls in graded highway. At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked $\begin{array}{c} \frac{1}{4} \ S\ 22 \\ \hline S\ 27 \end{array}$ 1928 and WC in quadrants of brass caps nearest point for cor.
68.45	A ditch, course N.
80.44	The cor. of secs. 21, 22, 27 and 28. Land: Level. Soil: Clayloam, 1st and 2d rate. No timber. Undergrowth: Greasewood, mesquite, sage.

Resurvey of the Subdivisions
of
T. 6 S., R. 7 E.

BOOK 3841


chains

N.0°40'E. on true line bet. secs. 21 and 22.
Over level land,, along unimproved roadway, thru undergrowth.

- .40 Telephone line, extends E. and W.
- .45 Cor. of fences extending N. and W. bears W., 45 lks. dist.
- 13.70 Well and pump bears W., 1 ch. dist.
- 20.09 Cor. of fences extending N. and E. bears E., 45 lks. dist.
- 20.19 Cor. of fences extending S. and W. bears W., 45 lks. dist.
- 40.19 Cor. of fences extending N., S. and E. bears E., 42 lks. dist.

40.25 Point for $\frac{1}{4}$ sec. cor.; falls in roadway.


At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked



and WC in quadrants of brass caps nearest point for cor.

80.50 Point for cor. of secs. 15, 16, 21 and 22, determined from collateral evidence, i.e., center line of intersection of roadways extending N., S. and W. and property fencing to NW.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 15, 16, 21 and 22, with brass caps marked



and WC in quadrants of brass caps nearest point for cor.


Land: Level.
 Soil: Clayloam, 1st and 2d rate.
 Timber: None.
 Undergrowth: Mesquite, greasewood and sage.

From the cor. of secs. 14, 15, 22 and 23.
S.89°50'W. on true line bet. secs. 15 and 22. (E $\frac{1}{2}$)
Over level land, thru undergrowth.

33.10 Wash, 10 lks. wide, course NW.

40.20 The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square, 12 ins. above ground,, scribe marks discernible but not legible, on fence line extending N. and S.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked



and WC in quadrants of brass caps nearest the corner.

Thence, West, on true line bet. secs. 15 and 22. (W $\frac{1}{2}$)
Over level land, thru undergrowth.

39.77 Fence, extends N. and S.

39.87 Telephone line, extends N. and S.

Resurvey of the Subdivisions
of
T. 6 S., R. 7 E.

chains	
40.22	The point for cor. of secs. 15, 16, 21 and 22. Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: None. Undergrowth: Mesquite, greasewood and sage.

	From point for cor. of secs. 15, 16, 21 and 22. N. 0° 43' E. on true line bet. secs. 15 and 16. Over level land, along roadway, thru scattering undergrowth.
.45	Cor. of fences extending N. and W. bears W., 45 lks. dist.
40.25	Point for $\frac{1}{4}$ sec. cor., falls in roadway. At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked $\begin{array}{c} \frac{1}{4} \\ \text{S } 16 \mid \text{S } 15 \\ 1928 \end{array}$ and WC in quadrants of brass caps nearest point for cor.
80.05	Cor. of fences extending N. and S. bears W., 45 lks. dist. Cor. of fences extending N. and E. bears E., 45 lks. dist. Cor. of fences extending S. and E. bears E., 45 lks. dist. Cor. of fences extending S. and W. bears W., 45 lks. dist.
80.50	Point for cor. of secs. 9, 10, 15 and 16, determined from collateral evidence, i.e., center line of intersection of roads extending N., S., E. and W. and property fences to NE., SE., SW. and NW. At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 9, 10, 15 and 16, with brass caps marked $\begin{array}{c} \text{T } 6 \text{ S } \text{R } 7 \text{ E} \\ \text{S } 9 \mid \text{S } 10 \\ \text{S } 16 \mid \text{S } 15 \\ 1928 \end{array}$ and WC in quadrants of brass caps nearest point for cor. Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: None. Undergrowth: Greasewood mesquite and sage.

	From the cor. of secs. 10, 11, 14 and 15. S. 89° 56' W. on true line bet. secs. 10 and 15. Over level land, along unimproved road. Cultivated land in sec. 10, scattering undergrowth in sec. 15.
19.60	A house bears N., $1\frac{1}{2}$ chs. dist.
20.11	Cor. of fences extending S. and W. bears S., 45 lks. dist.
40.26	Point for $\frac{1}{4}$ sec. cor., falls in roadway. At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

Resurvey of the Subdivisions
of
T. 6 S., R. 7 E.

BOOK 3841

chains

$\frac{1}{4}$ S 10
S 15

1928

and WC in quadrants of brass caps nearest point for cor.

Cor. of fences extending E.,W.and N. bears N., 46 lks.dist.
Cor. of fences extending E.,W.and S.bears S., 46 lks.dist.
West end of cultivated land in sec. 10.

80.20 Telephone line extends N. and S.

80.52 The point for cor. of secs. 9,10,15 and 16.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood,mesquite and sage.

From point for cor. of secs. 9,10,15 and 16.
N.0°08'E. on true line bet. secs. 9 and 10.
Over level land, along unimproved roadway, thru brush.

.45 Cor. of fences extending N. and E. bears E., 45 lks.dist.
Cor. of fences extending N. and W. bears W., 45 lks.dist.

2.10 Ranchyard, house, well,etc., bears W., 2½ chs. dist.

40.00 Point for ¼ sec. cor.; falls in roadway.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to ¼ sec.cor.,with brass
caps marked

$\frac{1}{4}$
S 9 | S 10
1928

and WC in quadrants of brass caps nearest point for cor.

Cor. of fences extending N.,S.and E. bears E., 46 lks.dist.
Cor. of fences extending E.,S.and W. bears W., 46 lks.dist.
A schoolhouse bears W., 3 chs. dist.

60.00 Cor. of fences extending S. and E. bears E., 45 lks.dist.

79.55
80.00 Point for cor. of secs. 3,4,9 and 10, determined from
collateral evidence, i.e., center line of intersection
of roads extending N.,S.,E.and W., and property fences
to SE. and NE.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to cor. of secs. 3,4,9
and 10, with brass caps marked

T 6 S R 7 E
S 4 | S 3
S 9 | S 10
1928

and WC in quadrants of brass caps nearest point for cor.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions
of
T. 6 S., R. 7 E

chains

From point for cor. of secs. 2,3,10 and 11.
S.89°42'W. on true line bet. secs. 3 and 10.
Over level land, along roadway, thru undergrowth.

40.40 Point for $\frac{1}{4}$ sec. cor.; falls in roadway.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$$\begin{array}{c} \frac{1}{4} \text{ S } 3 \\ \frac{1}{4} \text{ S } 10 \end{array}$$

1928

and WC in quadrants of brass caps nearest point for cor.

40.89 Cor. of fences extending N. and W. bears N., 48 lks. dist.

80.45 Cor. of fences extending E., W. and S. bears S., 43 lks. dist.

80.45 Telephone line extends N. and S.

80.80 The point for cor. of secs. 3,4,9 and 10.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

From point for cor. of secs. 3,4,9 and 10.
N.0°37'E. on true line bet. secs. 3 and 4.
Over level land, along roadway, thru undergrowth.

.45 Cor. of fences extending N. and E. bears E., 45 lks. dist.

40.56 Point for $\frac{1}{4}$ sec. cor.; falls in roadway.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 4 \text{ | } \text{S } 3 \end{array}$$

1928

and WC in quadrants of brass caps nearest point for cor.

41.79 Cor. of fences extending S. and E. bears E., 45 lks. dist.

Cor. of fences extending N. and W. bears W., 45 lks. dist.

(Note: This is random fencing and not based on old survey)

80.96 Cor. of fences extending S. and W. bears W., 45 lks. dist.

81.41 Intersect the 1st Stand. Par. S., at 16 lks. N.89°39'W. of stand. cor. of secs. 34 and 35, T.5 S., R.7 E., described in book "A". At point of intersection,

Set an iron post 3 ft. long 2 ins. diam., 42 ins. in ground, in roadway, for closing cor. of secs. 3 and 4, with brass cap marked

$$\begin{array}{c} \text{T } 5 \text{ S } \text{R } 7 \text{ E} \\ \text{S } 34 \end{array}$$

$$\begin{array}{c} \text{S } 4 \text{ | } \text{S } 3 \\ \text{T } 6 \text{ S } \text{R } 7 \text{ E} \end{array}$$

$$\begin{array}{c} \text{C } \text{C} \\ 1928 \end{array}$$

At points S.45°E. and S.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors, similarly marked, with addition of WC in quadrants of brass caps nearest the corner.

Resurvey of the Subdivisions
of
T. 6 S., R. 7 E.

BOOK 3841


chains

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

From the point for cor. of secs. 4,5,32 and 33, on S. bdy.
of Tp., hereinbefore described.
N.0°08'E. on true line bet. secs. 32 and 33.
Over level land, thru undergrowth.

25.50 Casa Grande-Florence Canal, 20 lks. wide, course SW.
27.40 S. end of fence extending N. bears E., 45 lks. dist.

40.26 Point for 1/4 sec. cor.
At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to 1/4 sec; cor., with brass
caps marked




and WC in quadrants of brass caps nearest point for cor.

80.07 Fence line extending N. and S. bears E., 45 lks. dist.
Cor. of fences extending N., S. and E. bears E., 45 lks. dist.

80.52 The cor. of secs. 28, 29, 32 and 33, which is an iron pipe
2 ins. diam., 6 ins. above ground. This is a local
perpetuation of orig. point for corner.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to cor. of secs. 28, 29,
32 and 33, with brass caps marked



and WC in quadrants of brass caps nearest the corner.


Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 27, 28, 33 and 34.
S.89°50'W. on true line bet. secs. 28 and 33.
Over level land, along unimproved roadway, thru undergrowth.

39.18 Cor. of fences extending E., W. and S. bears S., 35 lks. dist.

40.40 Point for 1/4 sec. cor.; falls in roadway.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to 1/4 sec. cor., with brass
caps marked



and WC in quadrants of brass caps nearest point for cor.

Resurvey of the Subdivisions
of
T. 6 S., R. 7 E.

chains

40.50 Cor. of fences extending N. and E. bears N., 60 lks. dist.
52.60 A house bears N., about 4 chs. dist.
80.35 Fence extends N. and S.

80.80 The cor. of secs. 28, 29, 32 and 33.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

N. 0° 54' E. on true line bet. secs. 28 and 29. (S $\frac{1}{2}$)
Over level land, along unimproved roadway, thru undergrowth.

40.46 The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square,
30 ins. above ground, firmly set and marked $\frac{1}{4}$ on W. Re-
set stake, which is 3 ft. long to 24 ins. in ground, and

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass
caps marked

$\frac{1}{4}$
S 29 | S 28
1928

and WC in quadrants of brass caps nearest the corner.

Cor. of fences extending N., S. and E. bears E., 45 lks. dist.

Thence, N. 1° 00' E. on true line bet. secs. 28 and 29. (N $\frac{1}{2}$)
Over level land, along unimproved roadway, thru undergrowth.

34.10 A house bears E., 4 chs. dist.

40.52 Cor. of fences extending S. and E. bears E., 45 lks. dist.

40.62 Transmission line, extends E. and W.

41.00 The cor. of secs. 20, 21, 28 and 29, which is a concrete
hub 4 ins. below surface of ground in center line of
graded highway, extends E. to Florence and W. to Casa
Grande. at intersection of unimproved road extending
N. and S. This cor. is a perpetuation by county road
engineers of orig. point for corner.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to cor. of secs. 20, 21,
28 and 29, with brass caps marked

T 6 S R 7 E
S 20 | S 21
S 29 | S 28
1928

and WC in quadrants of brass caps nearest the corner.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Mesquite, greasewood and sage.

From the corner of secs. 21, 22, 27 and 28.

N. 89° 31' W. on true line bet. secs. 21 and 28.

Over level land, along center line of Casa Grande-Florence
highway, thru undergrowth.

39.20 A ranch house bears N., 4 chs. dist.

Resurvey of the Subdivisions
of
T. 6 S., R. 7 E.

BOOK 3841

chains

40.13 Point for $\frac{1}{4}$ sec. cor.; falls in center line of highway.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4}$ S 21
S 28

1928

and WC in quadrants of brass caps nearest point for cor.

Cor. of fences extending E., W. and N. bears N., 45 lks. dist.
Cor. of fences extending S. and W. bears S., 45 lks. dist.

80.26 The cor. of secs. 20, 21, 28 and 29.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite, sage.

N. $0^{\circ}14'$ W. on true line bet. secs. 20 and 21. (S $\frac{1}{2}$)
Over level land, along unimproved roadway, thru undergrowth.

.40 Telephone line, extends E. and W.
.45 Cor. of fences extending N. and E. bears E., 45 lks. dist.

39.65 The $\frac{1}{4}$ sec. cor., which is a mesquite stake,, charred, 4 ins. sq., 12 ins. long, buried in ground. Top part of stake has been obliterated.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4}$
S 20 | S 21

1928

and WC in quadrants of brass caps nearest the corner.

Thence, N. $0^{\circ}34'$ E. on true line bet. secs. 20 and 21. (N $\frac{1}{2}$)
Over level land, along unimproved roadway, thru undergrowth.

39.72 Cor. of fence, fence extends E. only, bears E., 45 lks. dist.

40.17 The cor. of secs. 16, 17, 20 and 21, which is a decayed mesquite stake buried in the ground. Alongside is an iron pipe 2 ins. diam., 6 ins. above ground, unmarked.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 16, 17, 20 and 21, with brass caps marked

T 6 S R 7 E
S 17 | S 16
S 20 | S 21

1928

and WC in quadrants of brass caps nearest the corner.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions
of
T. 6 S., R. 7 E.

chains	From the point for cor. of secs. 15,16,21 and 22. N.89°55'W. on true line bet. secs. 16 and 21. Over level land, along unimproved roadway, thru undergrowth. Land in sec. 16 is under cultivation.
.38	
1.10	A ranch house bears N., 1½ chs. dist.
3.50	A building bears N., 1½ chs. dist.
40.43	Point for ¼ sec. cor., falls in roadway. At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to ¼ sec. cor., with brass caps marked $\begin{array}{c} \frac{1}{4} \text{ S } 16 \\ \frac{1}{4} \text{ S } 21 \end{array}$ 1928 and WC in quadrants of brass caps nearest point for cor. Fence line extending E. and W. bears N., 43 lks. dist.
42.60	A house bears N., 1 ch. dist.
44.20	A well and pump bears N., 1½ chs. dist.
47.10	A building bears N., 70 lks. dist.
60.65	Cor. of fences extending S. and W. bears S., 45 lks. dist.
80.86	The cor. of secs. 16,17,20 and 21. Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: None. Undergrowth: Greasewood, mesquite and sage.

	N.0°56'E. on true line bet. secs. 16 and 17. Over level land, along unimproved roadway, thru undergrowth. Cultivated land in SW¼ sec. 16.
.45	Cor. of fences extending N. and W. bears W., 45 lks. dist. Cor. of fences extending N. and E. bears E., 45 lks. dist.
2.50	A house bears W., 2 chs. dist.
40.27	Cor. of fences extending S. and W. bears W., 45 lks. dist.
40.29	Point for ¼ sec. cor., falls in roadway. At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to ¼ sec. cor., with brass caps marked $\frac{1}{4}$ $\text{S } 17 \text{S } 16$ 1928 and WC in quadrants of brass caps nearest point for cor. Fence line extending N. and S. bears E., 45 lks. dist. Cleared land in sec. 16.
80.13	Cor. of fences extending S. and E. bears E., 45 lks. dist.
80.58	The cor. of secs. 8,9,16 and 17, which is a mesquite stake 4 ins. square, 2 ins. above ground. Top part of stake has been obliterated. Alongside is an iron pipe 3 in. diam., 12 ins. above ground., unmarked. At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 8,9,16 and 17, with brass caps marked

Resurvey of the Subdivisions
of
T. 6 S., R. 7 E.

BOOK 3841

chains

T 6 S R 7 E
S 8 | S 9
S 17 | S 16
1928

and WC in quadrants of brass caps nearest the corner.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Mesquite, greasewood and sage. Cleared
in sec. 16.

From point for cor. of secs. 9, 10, 15 and 16.
N. 89° 55' W. on true line bet. secs. 9 and 16.
Over level land, along unimproved roadway, thru under-
growth. Land in sec. 9 is under cultivation.

20.00 Cor. of fences extending N. and E. bears N., 55 lks. dist.
W. end of cultivated land in sec. 9.

40.27 Point for 1/4 sec. cor., falls in roadway.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to 1/4 sec. cor., with brass
caps marked

1/4 S 9
1/4 S 16
1928

and WC in quadrants of brass caps nearest point for cor.

Cor. of fences extending N. and W. bears N., 65 lks. dist.
Fence line extending E. and W. bears S., 43 lks. dist.

80.54 The cor. of secs. 8, 9, 16 and 17.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

N. 0° 40' E. on true line bet. secs. 8 and 9. (S 1/2)
Over level land, thru undergrowth; along unimproved roadway.

.58 Cor. of fences extending N. and E. bears E., 47 lks. dist.

40.36 The 1/4 sec. cor., which is a mesquite stake 4 ins. square,
12 ins. long buried 4 ins. under ground. Remains of
orig. stake, top of which has been obliterated. Along
side is an iron pipe 2 ins. diam., 6 ins. above ground.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to 1/4 sec. cor., with brass
caps marked

1/4
S 8 | S 9
1928

and WC in quadrants of brass caps nearest the corner.

Cor. of fences extending S. and E. bears E., 45 lks. dist.

Resurvey of the Subdivisions
of
T. 6 S., R. 7 E.

chains

Thence, N.0°30'E. on true line bet. secs. 8 and 9. (N $\frac{1}{2}$)
Over level land, thru undergrowth.

40.36 The cor. of secs. 4,5,8 and 9, which is a rotted mesquite stake 4 ins. square, 16 ins. long lying alongside an iron pipe 3 ins. diam., 12 ins. above ground. No marks are discernible on stake or pipe.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 4,5,8 and 9, with brass caps marked

T 6 S R 7 E
S 5 | S 4
S 8 | S 9
1928

and WC in quadrants of brass caps nearest the corner.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Mesquite, greasewood and sage.

From the point for cor. of secs. 3,4,9 and 10.
N.89°20'W. on true line bet. secs. 4 and 9.
Over level land, thru undergrowth, along unimproved roadway.

.45 Transmission lines, extend N. and S.

39.91 Point for $\frac{1}{4}$ sec. cor., falls in roadway.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4}$ S 4
S 9
1928

and WC in quadrants of brass caps nearest point for cor.

79.82 The cor. of secs. 4,5,8 and 9.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 4,5,8 and 9.
N.0°16'E. on true line bet. secs. 4 and 5. (S $\frac{1}{2}$)
Over level land, thru undergrowth, along unimproved roadway.

40.38 The $\frac{1}{4}$ sec. cor., which is a decayed mesquite stake 4 ins. square, buried 4 ins. under ground. Upper part of stake has been obliterated. Alongside is an iron pipe 2 ins. diam., 6 ins. above ground.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4}$
S 5 | S 4
1928

and WC in quadrants of brass caps nearest the corner.

Resurvey of the Subdivisions
of
T. 6 S., R. 7 E.

BOOK 3841

chains Thence, N.0°36'E. on true line bet. secs. 4 and 5. (N½)
Over level land, thru undergrowth, along unimproved roadway.

40.52 Intersect the 1st stand. Par. S. at point for clos. cor.
of secs. 4 and 5, 25 lks. N.89°32'W. of the stand. cor.
of secs. 33 and 34, T.5 S., R.7 E., described in book
"A". At point of intersection, which falls in inter-
section of unimproved roads extending N., S., E. and W.,

Set an iron post 3 ft. long 2 ins. diam., 42 ins. in ground
for closing cor. of secs. 4 and 5, with brass cap marked

T 5 S R 7 E
S 33

S 5 | S 4
T 6 S R 7 E
C C
1928

At points S.45°E. and S.45°W., 64 lks. dist., set iron
posts, each 3 ft. long 1 in. diam., 33 ins. in ground
for wit. cors., similarly marked, with addition of WC
in quadrants of brass caps nearest the corner.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

From the point for cor. of secs. 5, 6, 31 and 32, on S.
bdy. of Tp., hereinbefore described.
N.0°15'E. on true line bet. secs. 31 and 32.
Over level land, along unimproved road, thru undergrowth.
Ditch course W.

.45

40.32 Point for ¼ sec. cor., falls in roadway.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to ¼ sec. cor., with brass
caps marked

¼
S 31 | S 32
1928

and WC in quadrants of brass caps nearest point for cor.

40.60 Cor. of fences extending S. and W. bears W., 46 lks. dist.

80.64 Point for cor. of secs. 29, 30, 31 and 32, falls in roadway,

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to cor. of secs. 29, 30,
31 and 32, with brass caps marked

T 6 S R 7 E
S 30 | S 29
S 31 | S 32
1928

and WC in quadrants of brass caps nearest the point for cor.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions
of
T. 6 S., R. 7 E.

chains

From the cor. of secs. 28, 29, 32 and 33.
N. 89° 48' W. on true line bet. secs. 29 and 32.
Over level land, thru undergrowth.

39.99 Fence extends N. and S.; cor. of fences extending S. and
W. bears N., 45 lks. dist.

40.12 Point for $\frac{1}{4}$ sec. cor.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass
caps marked

$$\frac{1}{4} \text{ S } 29$$

$$\frac{1}{4} \text{ S } 32$$

1928

and WC in quadrants of brass caps nearest point for cor.

79.68 Fence extends N. and S.; cor. of fences extending S. and
E. bears N., 55 lks. dist.

80.24 The point for cor. of secs. 29, 30, 31 and 32.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 25, 30, 31 and 36, on W. bdy. of Tp.,
hereinbefore described.

N. 89° 50' E. on true line bet. secs. 30 and 31.
Over level land, thru undergrowth.

38.38 Point for $\frac{1}{4}$ sec. cor.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass
caps marked

$$\frac{1}{4} \text{ S } 30$$

$$\frac{1}{4} \text{ S } 31$$

1928

and WC in quadrants of brass caps nearest point for cor.

38.80 Cor. of old fence extending N. and E. bears N., 37 lks. dist.

78.50 The point for cor. of secs. 29, 30, 31 and 32.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

From point for cor. of secs. 29, 30, 31 and 32.
N. 0° 42' E. on true line bet. secs. 29 and 30.
Over level land, thru undergrowth.

40.32 Point for $\frac{1}{4}$ sec. cor.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass
caps marked

$$\frac{1}{4}$$

$$\text{S } 30 \text{ | S } 29$$

1928

Resurvey of the Subdivisions
of
T. 6 S., R. 7 E.

BOOK 3841


chains

and WC in quadrants of brass caps nearest point for cor.

- 60.45 Cor. of fences extending N. and W. bears W., 46 lks. dist.
- 80.20 Cor. of fences extending S. and W. bears W., 45 lks. dist.
- 80.30 Transmission line, extends E. and W.

80.64 The cor. of secs. 19, 20, 29 and 30, which is a concrete hub under surface of ground in center line of highway extending E. to Florence and W. to Casa Grande. This is a perpetuation by county road engineers of orig. point for cor.

At points N.45°E., S.45°E. S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 19, 20, 29 and 30, with brass caps marked




and WC in quadrants of brass caps nearest the corner.

Land: Level.
 Soil: Clayloam, 1st and 2d rate.
 Timber: None.
 Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 20, 21, 28 and 29.
 S.89°40'W. on true line bet. secs. 20 and 29.
 Over level land, along center line of Casa Grande-Florence highway, thru scattering undergrowth.

- 20.20 Cor. of fences extending N. and W. bears N., 45 lks. dist.
- 34.30 Ditch, course N.
- 40.33 Point for 1/4 sec. cor.; falls in graded highway.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to 1/4 sec. cor., with brass caps marked



and WC in quadrants of brass caps nearest the point for cor.

Fence line extending E. and W. bears N., 45 lks. dist.

80.66 The cor. of secs. 19, 20, 29 and 30.

Land: Level.
 Soil: Clayloam, 1st and 2d rate.
 Timber: None.
 Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions

of

T. 6 S., R. 7 E.

chains

From the cor. of secs. 19, 24, 25 and 30, on W. bdy. of Tp.,
hereinbefore described.

N.89°40'E. on true line bet. secs. 19 and 30.
Over level land, along center line of Casa Grande-Florence
highway, thru undergrowth.

38.63 Point for $\frac{1}{4}$ sec. cor.; falls in graded highway.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass
caps marked

$$\frac{1}{4} \begin{array}{l} S 19 \\ S 30 \end{array}$$

1928

and WC in quadrants of brass caps nearest point for cor.

58.30 Cor. of fences extending N. and E. bears N., 46 lks. dist.
Cor. of fences extending S. and E. bears S., 46 lks. dist.

78.88 The cor. of secs. 19, 20, 29 and 30.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

N.0°11'W. on true line bet. secs. 19 and 20. (S $\frac{1}{2}$)
Over level land, along unimproved roadway, thru undergrowth.

.46 Cor. of fences extending N. and W. bears W., 41 lks. dist.
Cor. of fences extending N. and E. bears E., 41 lks. dist.

40.32 Point for $\frac{1}{4}$ sec. cor., determined from collateral evidence,
i.e., center line of roadway extending N. and S. and
property fencing extending E. and W.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in the ground for wit. cors. to $\frac{1}{4}$ sec. cor., with
brass caps marked

$$\frac{1}{4} \begin{array}{l} S 19 \\ S 20 \end{array}$$

1928

and WC in quadrants of brass caps nearest point for cor.

Cor. of fences extending S. and W. bears W., 20 lks. dist.

Cor. of fences extending N. and W. bears W., 40 lks. dist.

Cor. of fences extending S. and E. bears E., 45 lks. dist.

Thence, N.0°37'E. on true line bet. secs. 19 and 20. (N $\frac{1}{2}$)

Over level land, along roadway, thru undergrowth.

39.73 Cor. of fences extending S. and W. bears W., 27 lks. dist.

40.22 The cor. of secs. 17, 18, 19 and 20, which is an iron pipe
2 ins. diam., 6 ins. above ground. This is a local per-
petuation of orig. point for cor.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to cor. of secs. 17, 18,
19 and 20, with brass caps marked

Resurvey of the Subdivisions
of
T. 6 S., R. 7 E.

BOOK 3841

chains

T 6 S R 7 E
S 18 | S 17
S 19 | S 20
1928

and WC in quadrants of brass caps nearest the corner.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite, sage.

From the cor. of secs. 16, 17, 20 and 21.
N.89°50'W. on true line bet. secs. 17 and 20.
Over level land, thru undergrowth: along unimproved roadway.
Cultivated land in sec. 17.

40.27 Point for 1/4 sec. cor.; falls in roadway.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to 1/4 sec.cor., with brass caps marked

1/4 S 17
S 20
1928

and WC in quadrants of brass caps nearest point for cor.

Cor. of fences extending N. and E. bears N., 67 lks. dist.
West end of cultivation in sec. 17.

40.40 Road, course E. and NW.; continue thru scattering undergrowth.

50.70 Wash, 10 lks. wide, course N.30°W.

80.54 The cor. of secs. 17, 18, 19 and 20.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

From the point for cor. of secs. 13, 18, 19 and 24, on W. bdy. of Tp.,
N.89°33'E. on true line bet. secs. 18 and 19. (W 1/2)
Over level land, thru undergrowth; along roadway.

10.56 Cor. of fences extending N. and E. bears N., 45 lks. dist.

28.86 Cor. of fences extending N. and W. bears N., 45 lks. dist.

38.54 The 1/4 sec. cor., which is a decayed mesquite stake 4 ins. square, buried 4 ins. under ground. Alongside is an iron pipe 1 in. diam., 6 ins. above ground.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to 1/4 sec.cor., with brass caps marked

1/4 S 18
S 19
1928

and WC in quadrants of brass caps nearest the corner.

Cor. of fences extending S. and W. bears S., 46 lks. dist.
Thence, N.89°32'E. on true line bet. secs. 18 and 19. (E 1/2)
Over level land, thru undergrowth; along roadway.

18.48 Cor. of fences extending S. and E. bears S., 45 lks. dist.

Resurvey of the Subdivisions
of
T. 6 S., R. 7 E.

chains

20.05 Cor. of fences extending N. and E. bears N., 45 lks. dist.

40.03 The cor. of secs. 17, 18, 19 and 20.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

N.0°57'E. on true line bet. secs. 17 and 18.
Over level land, thru undergrowth, along roadway.

.45 Cor. of fences extending N. and W. bears W., 45 lks. dist.

40.00 Cor. of fences extending N. and W. bears W., 84 lks. dist.

40.24 Point for $\frac{1}{4}$ sec. cor.; falls in roadway.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass
caps marked

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 18 \text{ | S } 17 \\ 1928 \end{array}$$

and WC in quadrants of brass caps nearest point for cor.

80.03 Cor. of fences extending S. and W. bears W., 46 lks. dist.

80.48 The cor. of secs. 7, 8, 17 and 18, which is the rotted remains of a mesquite stake, under ground. Alongside is an iron pipe 2 ins. diam., 6 ins. above ground, unmarked.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to cor. of secs. 7, 8, 17
and 18, with brass caps marked

$$\begin{array}{c} \text{T } 6 \text{ S } \text{R } 7 \text{ E} \\ \text{S } 7 \text{ | S } 8 \\ \text{S } 18 \text{ | S } 17 \\ 1928 \end{array}$$

and WC in quadrants of brass caps nearest the corner.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite, sage.

From the cor. of secs. 8, 9, 16 and 17.
N.89°54'W. on true line bet. secs. 8 and 17.
Over level land, thru undergrowth.

27.30 Old road, bears N. and S.

40.26 The $\frac{1}{4}$ sec. cor., which is a pine stake 2x4 ins. diam., 2 ft. above ground, unmarked. This is a local reestablishment.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass
caps marked

$$\begin{array}{c} \text{S } 8 \\ \frac{1}{4} \text{ S } 17 \end{array}$$

1928

Resurvey of the Subdivisions
of
T. 6 S., R. 7 E.

BOOK 3841

chains

and WC in portions of brass caps nearest the corner.

78.20 Old road, bears NE. to Florence and W. to Casa Grande.

80.52 The cor. of secs. 7,8,17 and 18.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite, sage.

From the cor. of secs. 7,12,13 and 18, on W. bdy. of Tp.,
hereinbefore described.

N.89°05'E. on true line bet. secs. 7 and 18. (W $\frac{1}{2}$)

Over level land, thru undergrowth, along old road.

14.70 A house bears N., 1 ch. dist.

21.07 Cor. of fences extending N. and W. bears N., 48 lks. dist.

38.80 The $\frac{1}{4}$ sec. cor., which is an iron pipe 3 ins. diam., 2 ins.
above ground. This is a local perpetuation of orig.
point for $\frac{1}{4}$ sec. cor.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to $\frac{1}{4}$ sec.cor., with brass
caps marked

$\frac{1}{4}$ S. 7
S 18
1928

and WC in portions of brass caps nearest the corner.

Cor. of fences extending N. and E. bears N., 45 lks. dist.

Thence, N.89°06'E. on true line bet. secs. 7 and 18. (E $\frac{1}{2}$)
Over level land, thru undergrowth, along old road.

23.68 Cor. of fences extending S. and E. bears S., 31 lks. dist.
Fence line extending E. and W. bears N., 51 lks. dist.

40.42 The cor. of secs. 7,8,17 and 18.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Mesquite, greasewood, sage.

N.0°54'W. on true line bet. secs. 7 and 8. (S $\frac{1}{2}$)
Over level land, thru undergrowth, along unimproved roadway.

.49 Cor. of fences extending N. and W. bears W., 46 lks. dist.

40.54 The $\frac{1}{4}$ sec. cor., which is the rotted remains of a mesquite
stake, buried in ground. Alongside is an iron pipe 2 ins.
diam., 6 ins. above ground, unmarked.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to $\frac{1}{4}$ sec.cor., with brass
caps marked

$\frac{1}{4}$
S 7 | S 8
1928

and WC in quadrants of brass caps nearest the corner.

Resurvey of the Subdivisions
of

T. 6 S. R. 7 E.

chains

Cor. of fences extending S. and W., bears W., 45 lks. dist.
Thence, N. 1° 57' E. on true line bet. secs. 7 and 8.
Over level land, thru undergrowth, along unimproved roadway.

5.00 A house bears W. about 30 chs. dist.

40.14 The cor. of secs. 5, 6, 7 and 8, which is an ironwood stake
4 ins. sq, 18 ins. long, with scribe marks no longer
visible.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to cor. of secs. 5, 6, 7
and 8, with brass caps marked

T	6	S	R	7	E
	S	6	S	5	
	S	7	S	8	
				1928	

and WC in quadrants of brass caps nearest the corner.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 4, 5, 8 and 9.
N. 89° 38' W. on true line bet. secs. 5 and 8. (E 1/2)
Over level land, thru scattering undergrowth.

24.70 Old road, extends N. and S.

40.31 The 1/4 sec. cor., which is an iron pipe 3 ins. diam., 6 ins.
above ground. This is a local restoration of the point
for 1/4 sec. cor.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to 1/4 sec. cor., with brass
caps marked

	1	S	5
	4	S	8
			1928

and WC in portions of brass caps nearest the corner.

E. end of fence line extending W. bears N., 45 lks. dist.

Thence, S. 89° 50' W. on true line bet. secs. 5 and 8.
Over level land, thru scattering undergrowth.

39.80 W. end of fence line extending E. bears N., 45 lks. dist.

40.35 The cor. of secs. 5, 6, 7 and 8.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite, sage.

Resurvey of the Subdivisions
of
T. 6 S., R. 7 E.

BOOK 3841

chains

From the point for cor. of secs. 1,6,7 and 12, on W. bdy. of Tp., hereinbefore described.
N.89°50'E. on true line bet. secs. 6 and 7. (W $\frac{1}{2}$)
Over level land, thru undergrowth.

39.74 The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square, 12 ins. above ground, marked $\frac{1}{4}$ on N. side.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec.cor., with brass caps marked

$\frac{1}{4}$ S 6
 $\frac{1}{4}$ S 7
1928

and WC in portions of brass caps nearest the corner.
Cor. of fences extending N. and E. bears N.,50 lks. dist.
Thence, N.88°42'E. on true line bet. secs. 6 and 7. (E $\frac{1}{2}$)
Over level land, thru undergrowth.

19.98 Cor. of fences extending N. and W. bears N.,50 lks. dist.

39.96 The cor. of secs. 5,6,7 and 8.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

N.0°44'E. on true line bet. secs. 5 and 6. (S $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

40.42 The $\frac{1}{4}$ sec. cor., which is an ironwood stake 4 ins. square, 12 ins. above ground, marked $\frac{1}{4}$ S on W. side.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec.cor., with brass caps marked

$\frac{1}{4}$
S 6 | S 5
1928

and WC in portions of brass caps nearest the corner.

Fence line extending N. and S. bears W.,45 lks. dist.

Thence, N.0°36'E. on true line bet. secs. 5 and 6.
Over level land, thru scattering undergrowth.

17.75 Old Florence to Casa Grande road, bears NE. and SW.

40.48 Cor. of fences extending S. and W. bears W.,46 lks. dist.

40.94 Intersect the 1st Stand. Par. S., at point for closing cor. of secs. 5 and 6, which is 38 lks. N.89°46'W. of the stand. cor. of secs. 32 and 33, T.5S.,R.7E. described in Book "A".

At point of intersection, set an iron post 3 ft. long 2 ins. diam., 40 ins. in ground for closing cor. of secs. 5 and 6, with brass cap marked

T 5 S R 7 E
S 32
S 6 | S 5
T 6 S R 7 E
C C
1928

Resurvey of the Subdivisions
of
T. 6 S., R. 7 E.

chains

At points S.45°E. and S.45°W., 64 lks. dist., set iron posts, each 1 in. diam., 3 ft. long 33 ins. in ground for wit. cors., similarly marked, with addition of WC in portions of brass caps nearest the corner.

Land: level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

The continued satisfactory adjustment of the transit used in the execution of the resurveys in T.6 S., R.7 E., described in the foregoing field notes, is indicated from field tests of said instrument as described in book "L", of this group.

General Description

This township is situated in the valley of the Gila River, or, more directly, the Santa Cruz Wash. Land is level and drainage is generally northwesterly. The elevation above sea is 1455 feet at the SE. corner of the Tp., and 1407 feet at the NW. cor. of the Tp., which are maximum and minimum elevations, respectively. Soil is a clay-loam, generally first rate and second rate. It is readily tillable and good soil for agricultural purposes, when water can be secured for irrigation purposes.

The Casa Grande-Florence Canal has a general westerly course thru the south tier of sections. There is no other surface water in the township. Wells to give water must be dug to a depth of 30 to two hundred feet.

There is no timber and undergrowth is scattering and consists mainly of mesquite, sage and greasewood. Sage is general where land has been cleared and abandoned.

The present available supply of irrigation water is not sufficient for all of the lands in this township, consequently there is a large area uncultivated.

The Casa Grande-Florence Highway bears E. and W., along the second latitudinal line, thru the township. Other roads of secondary nature, and generally unimproved, follow many of the section lines.

There is no indication of mineral activity in the township.

BOOK 3841

4-680

FIELD ASSISTANTS.

NAMES.	CAPACITY.
Frank Burgess	1st Chainman
Dave Cummins	2nd Chainman
Cecil Emmons	Flagman
Elliott Pierson	Cornerman

BOOK 3841

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Dupree R. Averill, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer, for Group 150, Arizona bearing date of the 18th day of February, 1928, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of

the South Boundary

West Boundary

and

Subdivision Lines of

Township 6 South, Range 7 East of the Gila and Salt

River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer, for Group 150, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place: Phoenix, Arizona.

Date: May 14, 1928.

Dupree R. Averill, U. S. Surveyor.

APPROVAL.

OFFICE OF U.S. SUPERVISOR OF SURVEYS, et al.

Denver, Colo., JUL 15 1929, 192

The foregoing field notes of the Survey of

the South Boundary, West Boundary

and

Subdivision Lines of

Township 6 South, Range 7 East

of the Gila and Salt River Base and Meridian, in the State of Arizona

executed by Dupree R. Averill, U.S. Surveyor

under his special instructions dated February 18, 1928 for Group 150, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Walter H. Johnson, U.S. Supervisor of Surveys

I certify that the foregoing transcript of the field notes of the above described surveys in

has been correctly copied from the original notes on file in this office.