



BOOK 3843

FIELD NOTES

OF THE RESURVEY OF

South Boundary

East Boundary

North Boundary

and

Subdivision Lines of

Township 7 South Range 5 East

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

Otis O. Gould U.S. Transitman

In the capacity of U. S. Surveyor..., under Special Instructions dated February 18, 1928., issued by the District Cadastral Engineer to govern surveys included in Group No. 150 Arizona..., which were approved by the Commissioner of the General Land Office, March 8, 1928., and Assignment Instructions dated March 10, 1928.

Resurvey commenced March 23, 1928.


Resurvey completed April 3, 1928.

3843

3843

~~INDEX DIAGRAM.~~

~~Township~~, ~~Range~~

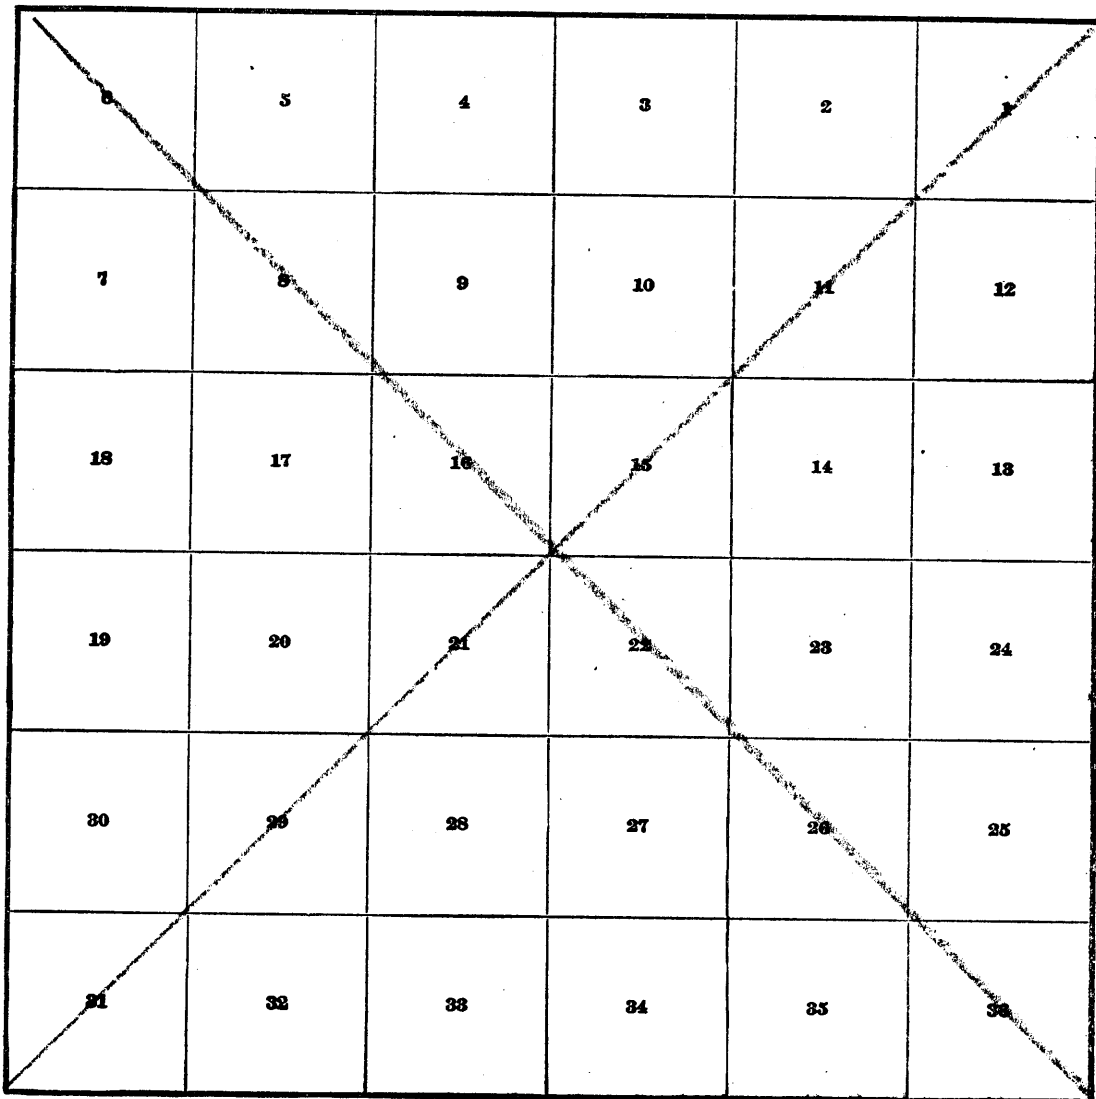


IA

Book "J"
 Group 150 Arizona
 Township 7 South Range 5 East

INDEX DIAGRAM

BOOK 3843

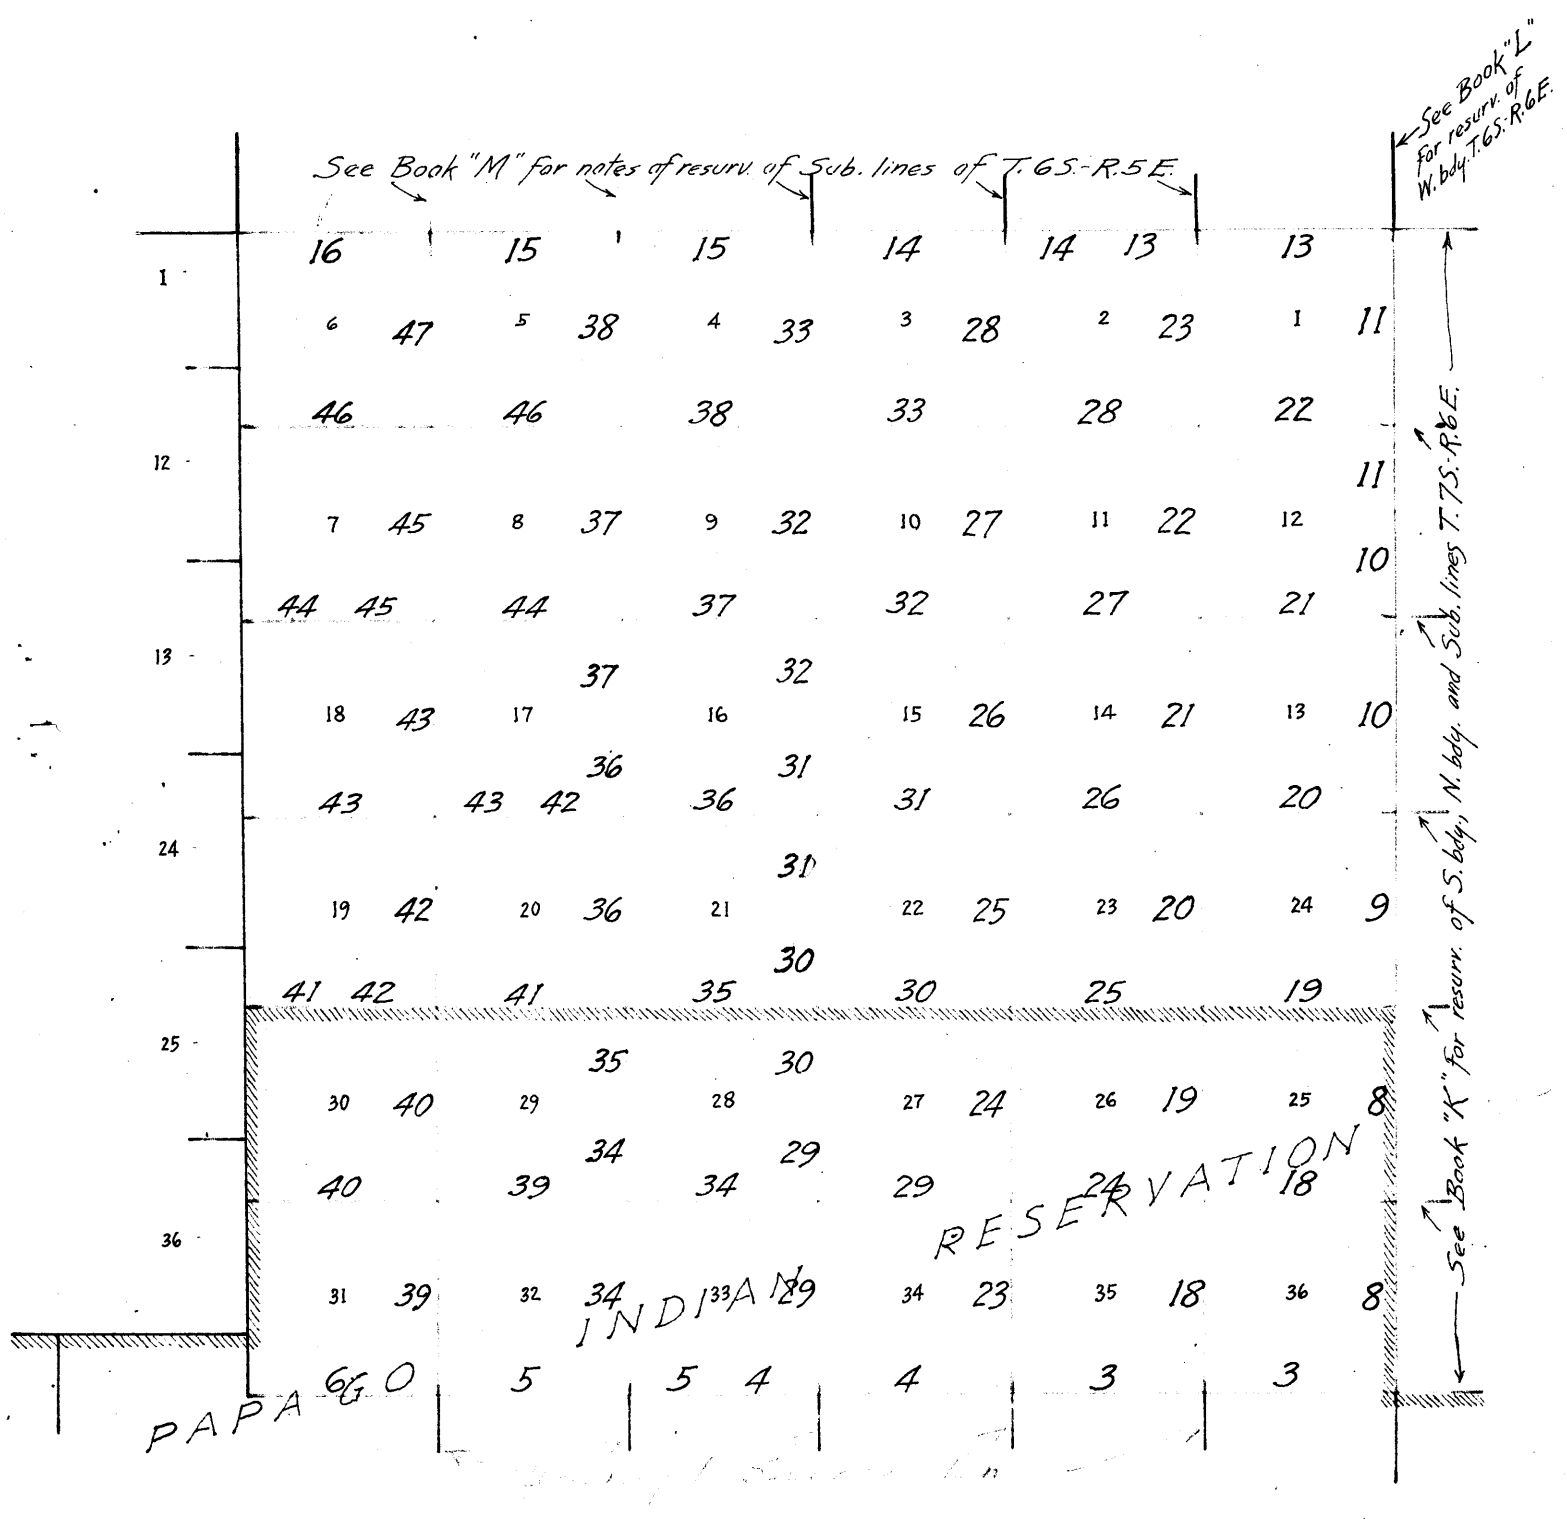

- Resurveyed by Dupree R. Averill, U.S. Surveyor, under instructions Group 150.
- Resurveyed by Otis O. Gould, U.S. Transitman, under instructions Group 150.
- Accepted surveys, retracements and resurveys.
- ////////// Boundary of Papago Indian Reservation.

The resurveys herein described were commenced March 23, 1928, and executed by Otis O. Gould, U.S. Transitman, using Buff solar transit No. 10125. This instrument is equipped with Smith solar attachment and otherwise conforms to the standard requirements of the General Land Office. All azimuth determinations are accomplished with the solar attachment.

PRELIMINARY FIELD TEST.

March 25, 1928: at the station described on Page 1 of Book A, near the center of sec. 29, T.6 S., R.6 E., G. and S.R. Base and Meridian, Arizona, latitude $32^{\circ}52'N.$ and longitude $111^{\circ}45'W.$, and on the meridian established by Polaris observation January 28th; examine the adjustments of the instrument and find no errors; then to test the workings of the solar apparatus, proceed as follows:

At 9h 0m a.m. app.t., set off $32^{\circ}52'$ on the latitude arc, $1^{\circ}55'N.$ on the declination arc and determine a meridian with the solar which agrees with the true meridian.


At app. noon, with latitude arc unchanged, observe the sun on the meridian; the resultant reading of the declination arc is $1^{\circ}58'N.$, which agrees with the computed declination of the sun.

At 3h 0m p.m., app.t., with the latitude arc unchanged, set off $2^{\circ}01'N.$ on the declination arc and determine a meridian with the solar which agrees with the true meridian.

As all of the observations taken during the usual hours of solar work agree within 1' of the true meridian, conclude that the instrument is in adjustment.

All measurements are made with a Lallie steel tape 5 chs. in length, compared with a Lufkin standard and found correct.

The measurements are taken on the slope, the vertical angles read with a clinometer and the slope measurements properly reduced to true horizontal distances.



Resurvey of the South Boundary
of
T. 7 S., R. 5 E.

chains

The south boundary of this township was surveyed in 1887, by R. C. Powers, U.S.D.S.

In 1915, W.H.Thorn, U.S.S., retraced the south boundary of this township, in connection with resurveys made in T.7 S., R.4 E., at which time he reconstructed the SE. and SW. township cors. with regulation 3 ins. iron posts.

There is no other retracement or resurvey of the south boundary of this township of record.

The following notes describe a dependent resurvey of the south boundary of T.7 S., R.5 E., preserving the alignment between orig. cors. found, and reestablishing missing cors. by direct proportion.

Retracement for Resurvey

From the cor. of Ts.7 and 8 S., Rs.5 and 6 E., hereinafter described.

West on a random line, bet. secs. 1 and 36, 2 and 35, and E. halves 3 and 34, making diligent search for orig. cors. at intervals of 40.00 chs., without success, and setting temp. cors. at such intervals.

199.60 Fall 163 lks. N. of the $\frac{1}{4}$ sec. cor. of secs. 3 and 34.

Thence, West on a random line bet. secs. 3 and 34. (W. $\frac{1}{2}$)

40.41 Fall 40 lks. S. of the cor. of secs. 3, 4, 33 and 34.

Thence, West on a random line bet. secs. 4 and 33.

39.96 Fall 26 lks. N. of the $\frac{1}{4}$ sec. cor.

80.65 Fall 64 lks. S. of the cor. of secs. 4, 5, 32 and 33.

Thence, West on a random line bet. secs. 5 and 32.

40.00 Find no trace of $\frac{1}{4}$ sec. cor. Set temp. cor.

80.12 Fall 16 lks. N. of the cor. of secs. 5, 6, 31 and 32.

Thence, West on a random line bet. secs. 6 and 31.

40.00 Find no trace of $\frac{1}{4}$ sec. cor. Set temp. cor.


79.21 Fall 13 lks. N. of the cor. of T.5 S., R.7 E., only, hereinafter described.

Resurvey of the South Boundary
of
T. 7 S. R. 5 E.

chains

Resurvey

The cor. of Ts. 7 and 8 S., Rs. 5 and 6 E. is an iron post
3 ins. diam., 8 ins. above ground, with brass cap marked




As this is also a cor. on the boundary of the Papago
Indian Reservation, add the marks PIR in SW. quadrant
of brass cap.

Raise a mound of stone 2½ ft. base 1½ ft. high S. of Cor.

Thence, S. 89°32'W. on true line bet. secs. 1 and 36.
Over level land, thru scattering undergrowth.

29.60 Highway, extends N. 10° E. to Casa Grande, S. 10° W. to Ajo.

39.92 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for ¼ sec. cor., with brass cap marked




and raise a mound of stone 2 ft. base 1½ ft. high N. of cor.

51.60 Wash, 30 lks. wide, course NW.

59.80 Wash, 35 lks. wide, course NW.

79.84 Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 1, 2, 35 and 36, with brass cap marked



Raise a mound of stone 2 ft. base 1½ ft. high W. of cor.

Land: Level.


Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, sage and mesquite.

S. 89°32'W. on true line bet. secs. 2 and 35.
Over level land, thru scattering undergrowth.

39.92 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for ¼ sec. cor., with brass cap marked



Raise a mound of stone 2 ft. base 1½ ft. high N. of cor.

44.40 Old winding road, bears NW. and SE.

79.84 Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 2, 3, 34 and 35, with brass cap marked

Resurvey of the South Boundary

of

T. 7. S. R. 5. E.

chains

T 7 S R 5 E
 S 34 | S 35
 S 3 | S 2
 T 8 S
 1928

Raise a mound of stone 3 ft. base $1\frac{1}{2}$ ft. high W. of cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, sage and mesquite.

S. $89^{\circ}32'W$. on true line bet. secs. 3 and 34. ($E\frac{1}{2}$)
 Over level land, thru scattering undergrowth.

39.92 The $\frac{1}{4}$ sec. cor., which is a decayed mesquite stake, 3 ins. square, 2 ft. above ground, scribe marks illegible. In place of stake, which is buried alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 34
 S 3
 1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.

Thence, N. $89^{\circ}26'W$. on true line bet. secs. 3 and 34. ($W\frac{1}{2}$)
 Over level land, thru scattering undergrowth.

40.41 The cor. of secs. 3, 4, 33 and 34, which is a mesquite stake, 4 ins. square, 18 ins. above ground and marked with 3 notches on E. and W. edges. In place of stake, which is buried alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 3, 4, 33 and 34, with brass cap marked

T 7 S R 5 E
 S 33 | S 34
 S 4 | S 3
 T 8 S
 1928

Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

S. $89^{\circ}38'W$. on true line bet. secs. 4 and 33. ($E\frac{1}{2}$)
 Over level land, thru scattering undergrowth.

39.96 The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square, 18 ins. above ground, scribe marks illegible. In place of stake, which is buried alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 33
 S 4
 1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high, N. of cor.

Resurvey of the South Boundary
of
T. 7. S. R. 5. E.

BOOK 3843


chains

Thence, N.88°44'W. on true line bet. secs. 4 and 33. (W $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

40.70

The cor. of secs. 4, 5, 32 and 33, which is a mesquite
stake 4 ins. square, 2 $\frac{1}{2}$ ft. long, lying on orig. mound
of earth; scribe marks illegible. In place of stake,
which is buried alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 4, 5, 32 and 33, with brass cap marked




Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high W. of cor.

- Land: Level.
- Soil: Clayloam, 1st and 2d rate.
- Timber: None.
- Undergrowth: Greasewood, sage and mesquite.

S.89°53'W. on true line bet. secs. 5 and 32.
Over level land, thru scattering undergrowth.

40.06

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked



Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high N. of cor.


60.00

Dim winding road, bears NE. and SW.

80.12

The cor. of secs. 5, 6, 31 and 32, which is a mesquite stake,
4 ins. square, 2 ft. long, lying on small mound of earth;
marked S XXXI on one side, T VII on one side, RV SV on
one side and T VIII S VI on one side. In place of stake,
which is buried alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 5, 6, 31 and 32, with brass cap marked



Raise a mound of stone 3 ft. base 1 $\frac{1}{2}$ ft. high W. of cor.

- Land: Level.
- Soil: Clayloam, 1st and 2d rate.
- Timber: None.
- Undergrowth: Greasewood, mesquite and sage.

6.

Resurvey of the South Boundary

o f
T. 7. S., R. 5. E.

chains

S.89°52'W. on true line bet. secs. 6 and 31.
Over level land, thru undergrowth.

40.06 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4} \begin{array}{l} S 31 \\ S 6 \end{array}$$

1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.

79.21 The cor. of T.7 S., R.5 E., only, which is an iron post,
3 ins. diam., 12 ins. above ground, with brass cap marked

T	7	S
R	5	E
S	31	

1915

Alongside is the orig. cor. of Ts. 7 and 8 S., Rs. 4 and 5
E., which is a mesquite stake 4 ins. square, 12 ins.
above ground, marked with 6 notches on E., S., W. and
N. edges, R 5 E on NE., T 8 S on SE, T 7 S on NW. and
R 4 E on SW. side.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

Resurvey of the East Boundary
of
T. 7 S., R. 5 E.

BOOK 3843

chains

The east boundary of this township was surveyed in 1887, by R.C. Powers, U.S.D.S.

There is no retracement or resurvey of the east boundary of this township of record.

The following notes describe a dependent resurvey of the east boundary of T.7 S., R.5 E., preserving the alignment between orig. cors. found, accepted points for cors., as determined from collateral evidence, and accepted (local) NE. cor. of township, reestablishing lost cors. by direct proportion.

Retracement for Resurvey.

From the cor. of Ts.7 and 8 S., Rs.5 and 6 E., hereinbefore described.

North on a random line bet secs. 31 and 36, 25 and 30.

40.12 Fall 5 1/2 lks. E. of the 1/4 sec. cor.

80.12 Find no trace of cor. of secs. 25, 30, 31 and 36. Set temp. cor.

120.12 Find no trace of 1/4 sec. cor. Set temp. cor.

160.48 Fall 19 lks. E. of accepted point for cor. of secs. 19, 24, 25 and 30.

Thence, North on a random line bet. secs. 19 and 24.

40.00 Find no trace of 1/4 sec. cor. Set temp. cor.

79.10 Fall 69 lks. W. of accepted point for cor. of secs. 13, 18, 19 and 24.

Thence, North on a random line bet. secs. 13 and 18.

40.00 Find no trace of 1/4 sec. cor. Set temp. cor.

80.72 Fall 14 lks. E. of accepted point for cor. of secs. 7, 12, 13 and 18.

Thence, North on a random line bet. secs. 7 and 12, 1 and 6.

40.00 Find no trace of 1/4 sec. cor. Set temp. cor.

80.00 Find no trace of cor. of secs. 1, 6, 7 and 12. Set temp. cor.

120.00 Find no trace of 1/4 sec. cor. Set temp. cor.

160.96 Fall 28 lks. E. of the accepted (local) cor. of Ts.6 and 7 S., Rs.5 and 6 E., hereinafter described.

Resurvey of the East Boundary
of

chains	T. 7 S., R. 5 E.																
	<p style="text-align: center;"><u>Resurvey</u></p> <p>From the cor. of Tps. 7 and 8 S., Rs. 5 and 6 E., herein- before described. (Papage Indian Reservation. N.0°04'W. on true line bet. secs. 31 and 36, (E. bdy. of / Over level land, thru scattering undergrowth.</p>																
40.12	<p>The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square, 12 ins. above ground, scribe marks illegible. In place of stake, which is deposited alongside,</p> <p>Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked</p> <div style="text-align: center;"> $\frac{1}{4}$ <table border="1" style="margin: auto;"> <tr><td>P</td><td></td><td></td><td></td></tr> <tr><td>I</td><td>S 36</td><td> </td><td>S 31</td></tr> <tr><td>R</td><td></td><td></td><td></td></tr> </table> <p>1928</p> </div> <p>Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.</p> <p>Continue measure, same course, on true line bet. secs. 31 and 36.</p>	P				I	S 36		S 31	R							
P																	
I	S 36		S 31														
R																	
54.10	<p>Old winding road, bears NE. and SW.</p>																
80.24	<p>Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 25, 30, 31 and 36, with brass cap marked</p> <div style="text-align: center;"> <table border="1" style="margin: auto;"> <tr><td></td><td></td><td>T 7 S</td><td></td></tr> <tr><td>P</td><td>R 5 E</td><td> </td><td>R 6 E</td></tr> <tr><td>I</td><td>S 25</td><td> </td><td>S 30</td></tr> <tr><td>R</td><td>S 36</td><td> </td><td>S 31</td></tr> </table> <p>1928</p> </div> <p>Raise a mound of stone 3 ft. base 2 ft. high W. of cor.</p> <p>Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: None. Undergrowth: Greasewood, sage and mesquite.</p> <hr style="border-top: 1px dashed black;"/> <p style="text-align: center;">(Papage Indian Reservation. N.0°04'W. on true line bet. secs. 25 and 30, (E. bdy. of / Over level land, thru scattering undergrowth.</p>			T 7 S		P	R 5 E		R 6 E	I	S 25		S 30	R	S 36		S 31
		T 7 S															
P	R 5 E		R 6 E														
I	S 25		S 30														
R	S 36		S 31														
40.12	<p>Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked</p> <div style="text-align: center;"> $\frac{1}{4}$ <table border="1" style="margin: auto;"> <tr><td>P</td><td></td><td></td><td></td></tr> <tr><td>I</td><td>S 25</td><td> </td><td>S 30</td></tr> <tr><td>R</td><td></td><td></td><td></td></tr> </table> <p>1928</p> </div> <p>Raise a mound of stone 3 ft. base 2 ft. high W. of cor.</p>	P				I	S 25		S 30	R							
P																	
I	S 25		S 30														
R																	
40.18	<p>Cor. of fences extending N. and E. bears E. 46 lks. dist.</p>																
79.86	<p>Cor. of fences extending S. and E. bears E. 46 lks. dist.</p>																
80.24	<p>Point for cor. of secs. 19, 24, 25 and 30, determined from collateral evidence, i.e., property fence cors. NE., SE. and NW., and center line of highway extending N. As point for cor. comes in improved highway, a place not suitable for reestablishment of permanent cor. monument,</p> <p>At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 19, 24, 25 and 30, with brass caps marked</p>																

Resurvey of the East Boundary
of
T. 7. S., R. 5. E.

chains

T 7 S	
R 5 E	R 6 E
S 24	S 19
S 25	S 30

PLR .1928

see 1936 location

and WC in quadrants of brass caps toward point for cor.
Improved highway extends N.0°30'E. to Casa Grande, S.9½°W.
to Ajo.
This is a **Corner** of the Papago Indian Reservation Bdy.
Land: Level.
Soil: Clayloam, 1st and 2d. rate.
Timber: None.
Undergrowth: Greasewood, sage and mesquite.

From point for cor. of secs. 19, 24, 25 and 30.
N.0°30'E. on true line bet. secs. 19 and 24.
Over level land, along highway, thru scattering undergrowth.

- .38 Cor. of fences extending N. and E. bears E., 46 lks. dist.
- Cor. of fences extending N. and W. bears W., 46 lks. dist.
- 2.20 A well bears W., 7½ chs. dist.
- 6.70 A house bears W., 7½ chs. dist.
- 39.26 Cor. of fences extending S. and W. bears W., 50 lks. dist.
- 39.55 Point for ¼ sec. cor. falls in highway.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to ¼ sec. cor., with brass caps marked

¼
S 24 | S 19
1928

and WC in portions of brass caps toward point for corner.
Fence extending N. and S. bears E., 54 lks. dist.
A house bears E., about 20 chs. dist.

- 78.64 Cor. of fences extending S. and E. bears E., 46 lks. dist.
- E. end of fence extending W. bears W., 46 lks. dist.

- 79.10 Accepted point for cor. of secs. 13, 18, 19 and 24, determined from collateral evidence, i.e., center line of highway and property fence cors. to NE., SE. and SW.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 13, 18, 19 and 24, with brass caps marked

T 7 S	
R 5 E	R 6 E
S 13	S 18
S 24	S 19

1928

and WC in quadrants of brass caps toward the point for cor.
Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

Resurvey of the East Boundary

of

T. 7 S., R. 5. E.

chains

From point for cor. of secs. 13, 18, 19 and 24.
 N.0°06'W. on true line bet. secs. 13 and 18.
 Over level land, along highway, thru scattering undergrowth.

.46 Cor. of fences extending N. and E. bears E., 46 lks. dist.

.40.02 Cor. of fences extending E. and S. bears E., 48 lks. dist.
 Cor. of fences extending N. and W. bears W., 47 lks. dist.

40.36 Point for $\frac{1}{4}$ sec. cor. falls in highway.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4}$
 S. 13 | S 18

1928

and WC in portions of brass caps toward point for cor.

66.00 A house bears W., 4 chs. dist.

80.27 Cor. of fences extending S. and W. bears W., 43 lks. dist.

80.72 Accepted point for cor. of secs. 7, 12, 13, and 18, which is determined from collateral evidence, i.e., center line of highway extending S. and E. and property fence cors. to NE. and SW.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 7, 12, 13 and 18, with brass caps marked

T 7 S
 R 5 E | R 6 E
 S 12 | S 7
 S 13 | S 18

1928

and WC in quadrants of brass caps toward point for cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

From point for cor. of secs. 7, 12, 13 and 18.
 N.0°06'W. on true line bet. secs. 7 and 12.
 Over level land, along old unimproved road, thru undergrowth.

.45
 39.86 Cor. of fences extending N. and E. bears E., 43 lks. dist.
 Cor. of fences extending S. and E. bears E., 68 lks. dist.

40.24 Point for $\frac{1}{4}$ sec. cor. falls in road.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4}$
 S 12 | S 7

1928

and WC in portions of brass caps toward point for cor.


Resurvey of the East Boundary
of
T. 7. S., R. 5. E.

BOOK 3843

chains

77.50 A house bears E. $1\frac{1}{2}$ chs. dist.
80.34 Cor. of fences extending N. and E. bears E., 20 lks. dist.
80.48 Point for cor. of secs. 1, 6, 7 and 12.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 1, 6, 7 and 12, with brass caps marked




and WC in quadrants of brass caps toward point for cor.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

From point for cor. of secs. 1, 6, 7 and 12.
N. $0^\circ 06'$ W. on true line bet. secs. 1 and 6.
Over level land, along unimproved road, thru undergrowth.

1.75 A house bears E., $4\frac{1}{2}$ chs. dist.
25.63 Cor. of fences extending S. and E. bears E., 20 lks. dist.
39.20 Casa Grande-Florence Canal, 15 lks. wide, course W.
40.24 Point for $\frac{1}{4}$ sec. cor.


At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked



and WC in portions of brass caps toward point for cor.

79.78 Canal, 15 lks. wide, course W.
80.48 Accepted (local) cor. of Ts. 6 and 7 S., Rs. 5 and 6 E., which is an iron pipe 1 in. diam., 3 ins. above ground. This cor. is identified by settlers as a perpetuation of orig. point for cor.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of Ts. 6 and 7 S., Rs. 5 and 6 E., with brass caps marked



and WC in quadrants of brass caps toward the corner.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Mesquite, greasewood and sage.

Resurvey of the North Boundary

of

T. 7. S., R. 5. E.

chains

The north boundary of this township was surveyed in 1887, by R. C. Powers, U.S.D.S.

In 1915, W. H. Thorn, U.S.S. reconstructed the NW. cor. of this township, with the regulation 3 in. iron post, in connection with his resurveys in T.7 S., R.4 E.

There is no retracement or resurvey of the north boundary of this township of record.

The following notes describe a dependent resurvey of the north boundary of T.7 S., R.5 E., preserving the alignment between orig. cors. and the accepted (local) NE. township cor., and reestablishing all missing cors. by direct proportion.

Retracement for Resurvey

From the cor. of Ts.6 and 7 S., Rs.5 and 6 E., hereinbefore described.

West on a random line bet. secs. 1 and 36.

40.00 Find no trace of $\frac{1}{4}$ sec. cor. Set temp. cor.

80.12 Fall 30 lks. N. of the cor. of secs. 1,2,35 and 36.

Thence, West on a random line bet. secs. 2 and 35, 3 and 34, 4 and 33.

40.00 Find no trace of $\frac{1}{4}$ sec. cor. Set temp. cor.

80.00 Find no trace of cor. of secs. 2,3,34 and 35. Set temp. cor.

120.00 Find no trace of $\frac{1}{4}$ sec. cor. Set temp. cor.

160.00 Find no trace of cor. of secs. 3,4,33 and 34. Set temp. cor.

200.00 Find no trace of $\frac{1}{4}$ sec. cor. Set temp. cor.

240.72 Fall 7 lks. S. of the cor. of secs. 4,5,32 and 33.

Thence, West on a random line bet. secs. 5 and 32.

40.21 Fall 3 lks. S. of the $\frac{1}{4}$ sec. cor.

80.37 Fall 5 lks. S. of the cor. of secs. 5,6,31 and 32.

Thence, West on a random line bet. secs. 6 and 31.

40.00 Find no trace of $\frac{1}{4}$ sec. cor. Set temp. cor.

79.40 Fall 5 lks. N. of the cor. of Ts.6 and 7 S., Rs.4 and 5 E., hereinafter described.

Resurvey of the North Boundary
of
T. 7 S. R. 5 E.

BOOK 3843

chains

Resurvey

From the cor. of Ts.6 and 7 S.,Rs.5 and 6 E., hereinbefore described.

S.89°47'W. on true line bet. secs. 1 and 36. Over level land, thru scattering undergrowth.


.30
19.70
29.50
39.24
39.44
39.65

Canal, 15 lks. wide, course N.
Road, extends N. and S.
Winding road, extends NE. and SW.
Yenson's ranch house bears S.51½°W.
Cor. of fences extending W. and S. bears S., 18 lks. dist.
A well bears S., 60 lks. dist.

40.06

Point for ¼ sec. cor.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to ¼ sec.cor., with brass caps marked




1928

and WC in portions of brass caps toward point for cor.

80.12

The cor. of secs. 1,2,35 and 36, which is a mesquite stake 4 ins. square, 2 ft. above ground, marked TVIS SXXXVI on NE., S XXXV on NW., RVE SLL on SW. and TVIIS S I on SE. side; with one notch on E. and 5 notches on W. edge. Cor. is at cor. of fences extending S. and E.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 1, 2, 35 and 36, with brass caps marked



T 7 S
1928

and WC in quadrants of brass caps toward the corner.


Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

N.89°59'W. on true line bet. secs. 2 and 35. Over level land, thru scattering undergrowth.

40.12

Point for ¼ sec. cor.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to ¼ sec. cor., with brass caps marked



1928

and WC in portions of brass caps toward point for cor.

60.00

End of fence extending W. bears S., 60 lks. dist.

79.71

Cor. of fences extending S. and E. bears S., 71 lks. dist.

Resurvey of the North Boundary
of

T. 7 S., R. 5 E.

Chains

80.24 Point for cor. of secs. 2, 3, 34 and 35.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 2, 3, 34 and 35, with brass caps marked

T 6 S R 5 E
S 34 | S 35
S 3 | S 2
T 7 S
1928

and WC in quadrants of brass caps toward point for cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

From point for cor. of secs. 2, 3, 34 and 35.
N.89°59'W. on true line bet. secs. 3 and 34.
Over level land, thru scattering undergrowth.

69 Cor. of fences extending S. and W. bears S., 83 lks. dist.
6.20 A wash, 30 lks. wide, course N.

40.12 Point for $\frac{1}{4}$ sec. cor.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist.; set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4}$ S 34
S 3
1928

and WC in quadrants of brass caps toward point for cor.
Fence extending E. and W. bears S., 70 lks. dist.

78.70 Cor. of fences extending S. and E. bears S., 84 lks. dist.

80.24 Point for cor. of secs. 3, 4, 33 and 34.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 3, 4, 33 and 34, with brass caps marked

T 6 S R 5 E
S 33 | S 34
S 4 | S 3
T 7 S
1928

and WC in quadrants of brass caps toward the point for cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

Resurvey of the North Boundary

of

BOOK 3843

T. 7 S. R. 5 E.

chains

From point for cor. of secs. 3, 4, 33 and 34.
N.89°59'W. on true line bet. secs. 4 and 33.
Over level land, thru scattering undergrowth.

.54
13.14
40.12

Cor. of fences extending N. and W. bears N., 26 lks. dist.
Cor. of fences extending N. and E. bears N., 34 lks. dist.
Point for 1/4 sec. cor.
At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to 1/4 sec. cor., with brass caps marked

1 S 33
4 S 4
1928

and WC in portions of brass caps toward point for cor.

80.24

The cor. of secs. 4, 5, 32 and 33, which is a mesquite stake 4 ins. square, 18 ins. above ground and marked with 4 notches on E. and 2 notches on W. edge; S XXXIII on NE., R V S V on SE., no marks visible on SW. and S XXXII on NW. side.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 4, 5, 32 and 33, with brass caps marked

T 6 S R 5 E
S 32 | S 33
S 5 | S 4
T 7 S
1928

and WC in quadrants of brass caps toward the corner.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

N.89°57'W. on true line bet. secs. 5 and 32. (E 1/2)
Over level land, thru scattering undergrowth.

40.21

The 1/4 sec. cor., which is a rotted mesquite stake 3 ins. square, 14 ins. long, lying on small mound of earth. Reset this stake, 26 ins. in ground and

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cor. to 1/4 sec. cor., with brass caps marked

1 S 32
4 S 5
1928

and WC in portions of brass caps toward the corner.

Thence, N.89°58'W. on true line bet. secs. 5 and 32. (W 1/2)
Over level land, thru scattering undergrowth.

29.90

Old winding road, bears NE. and SW.

40.16

The cor. of secs. 5, 6, 31 and 32, which is a mesquite stake 4 ins. square, 16 ins. above ground and marked R V E S V on SE. side. Other marks illegible.

Resurvey of the North Boundary

of

T. 7 S., R. 5 E.

chains

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 5, 6, 31 and 32, with brass caps marked

T 6 S R 5 E
 S 31 | S 32
 S 6 | S 5
 T 7 S
 1928.

and WC. in quadrants of brass caps toward the corner.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

S.89°58'W. on true line bet. secs. 6 and 31.
 Over level land, thru scattering undergrowth.

40.21 Point for $\frac{1}{4}$ sec. cor.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4}$ S 31
 S 6
 1 928

and WC in portions of brass caps toward point for cor.

79.40 The cor. of Ts. 6 and 7 S., Rs. 4 and 5 E., which is an iron post 3 ins. diam., 14 ins. above ground, with brass cap marked

T 6 S
 R 4 E | R 5 E
 S 36 | S 31
 S 1 | S 6
 T 7 S
 1925

Witnessed by pits, N., E., S. and W. and a mound of earth S.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

Boundaries
of
T. 7 S., R. 5 E.

Latitudes, Departures and Closing Errors.

Lines designated	True Course	Distance	Latitudes		Departures	
			N.	S.	E.	W.
S. bdy. of Tp.	S. 89° 32' W.	199.60		1.63		199.60
	N. 89° 26' W.	40.41	.40			40.41
	S. 89° 38' W.	39.96		.26		39.96
	N. 88° 44' W.	40.70	.90			40.69
	S. 89° 53' W.	80.12		.16		80.12
	S. 89° 52' W.	79.21	.18			79.21
W. bdy. of Tp.	N. 0° 09' W.	40.14	40.14			.11
	N. 0° 09' W.	40.20	40.20			.11
	N. 0° 09' W.	40.09	40.09			.10
	N. 0° 09' W.	40.11	40.11			.10
	N. 0° 18' W.	40.29	40.29			.21
	N. 0° 09' E.	40.29	40.29			.10
	N. 0° 01' W.	40.08	40.08			.01
	N. 0° 01' W.	40.08	40.08			.01
	N. 0° 12' W.	80.38	80.38			.28
	N. 0° 15' W.	40.15	40.15			.17
N. 0° 06' E.	40.12	40.12			.07	
N. bdy. of Tp.	N. 89° 58' E.	79.40	.05		79.40	
	S. 89° 58' E.	40.16		.02	40.16	
	S. 89° 57' E.	40.21		.03	40.21	
	S. 89° 59' E.	240.72		.07	240.72	
	N. 89° 47' E.	80.12	.30		80.12	
E. bdy. of Tp.	S. 0° 06' E.	160.96		160.96	.28	
	S. 0° 06' E.	80.72		80.72	.14	
	S. 0° 30' W.	79.10		79.10		.69
	S. 0° 04' E.	160.48		160.48	.19	
Convergency					.47	
Totals			483.76	483.43	481.87	481.78
			483.43		481.78	
Error in latitude			0.33			
Error in departure					0.09	

Resurvey of the Subdivisions
of
T. 7 S., R. 5 E.

chains

The subdivision lines of this township were surveyed in 1887, by R.C. Powers, U.S.D.S.

There is no retracement or resurvey of the subdivision lines of this township of record.

The following notes describe a dependent resurvey of the subdivision lines of T.7 S., R.5 E., with reconstruction of orig. cors. and accepted local cors. and reestablishment of missing cors., at accepted points for such cors. as determined from collateral evidence, or by proper proportion.

From the cor. of secs. 1, 2, 35 and 36, on S. bdy. of Tp., hereinbefore described.

N. 0° 21' W. on true line bet. secs. 35 and 36.
Over level land, thru scattering undergrowth.

25.10 Wash, 35 lks. wide, course NW.

32.30 Wash, 15 lks. wide, course NW.

40.26 Set an iron post 3 ft. base 1 in. diam., 33 ins. in ground for 1/4 sec. cor., with brass cap marked

S 35 | S 36
1928

Raise a mound of stone 2 ft. base 1 1/2 ft. high W. of cor.

80.52 Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 25, 26, 35 and 36, with brass cap marked

T 7 S R 5 E
S 26 | S 25
S 35 | S 36
1928

Raise a mound of stone 2 ft. base 1 1/2 ft. high W. of cor.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 25, 30, 31 and 36, on E. bdy. of Tp., hereinbefore described.

S. 89° 43' W. on true line bet. secs. 25 and 36.
Over level land, thru scattering undergrowth.

9.10 Wash, 30 lks. wide, course N. 20° W.

15.00 Highway, extends N. 10° E. to Casa Grande, S. 10° W. to Ajo.

40.12 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for 1/4 sec. cor., with brass cap marked

1/4 S 25
1/4 S 36
1928

Raise a mound of stone 3 ft. base 2 ft. high N. of cor.

80.24 The cor. of secs. 25, 26, 35 and 36.

Land: Level. Soil: Clayloam, 1st and 2d rate.
Timber: None. Undergrowth: Greasewood, mesquite, sage.


Resurvey of the Subdivisions
of
T. 7. S., R. 5. E.

BOOK 3848

chains

N.0°01'E. on true line bet. secs. 25 and 26.
Over level land, thru scattering undergrowth.


40.26 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked



Raise a mound of stone 3 ft. base $1\frac{1}{2}$ ft. high W. of cor.

80.52 The cor. of secs. 23, 24, 25 and 26, which is a mesquite
stake 4 ins. square, 12 ins. above ground, marked with
1 notch on E. and 2 notches on S. edge. In place of
stake, which is buried alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 23, 24, 25 and 26, with brass cap marked



Raise a mound of stone 3 ft. base 2 ft. high W. of cor.


Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

From the point for cor. of secs. 19, 24, 25 and 30, on E.
bdy. of Tp., hereinbefore described.
S.89°59'W. on true line bet. secs. 24 and 25. ($E\frac{1}{2}$)
Over level land, thru scattering undergrowth.
On north boundary of Papago Indian Reservation.

23.10 Wash, 25 lks. wide, course NW.

40.08 The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square,
18 ins. above ground and marked $\frac{1}{4}$ on N. side. In place
of stake, which is buried alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked



Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.
Cor. of fences extending E., W. and N. bears N., 45 lks. dist.

Thence, S.89°54'W. on true line bet. secs. 24 and 25. ($W\frac{1}{2}$)
Over level land, thru scattering undergrowth.

40.11 The cor. of secs. 23, 24, 25 and 26.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions
of
T. 7 S. R. 5 E.

chains	<p>N.0°34'E. on true line bet. secs. 23 and 24. (S$\frac{1}{2}$) Over level land, thru undergrowth.</p> <p>.44 W. end of fence extending E. bears E., 56 lks.dist.</p> <p>39.47 The accepted (local) $\frac{1}{4}$ sec. cor., which is a stake 3 ins. square, 4 ins. above ground, unmarked. This is a perpetuation of orig. point for cor. In place of stake, which is buried alongside,</p> <p>Set an iron post 3 ft. long 1 in. diam., 33 ins.in ground for $\frac{1}{4}$ sec. cor., with brass cap marked</p> <p style="text-align: center;"> $\frac{1}{4}$ S 23 S 24 1928 </p> <p>Raise a mound of stone 2 ft. base 1$\frac{1}{2}$ ft. high W.of cor. Cor. of fences extending N. and E. bears E., 45 lks.dist.</p> <p>Thence, N.0°01'E. on true line bet. secs. 23 and 24. (N$\frac{1}{2}$) Over level land, thru scattering undergrowth, along dim road.</p> <p>39.51 Cor. of fences extending S. and E. bears E., 45 lks.dist.</p> <p>39.97 Accepted point for cor. of secs. 13, 14, 23 and 24, which is determined from collateral evidence, i.e., center line of unimproved roads extending N., S., E. and W., at intersection, and property fence cors. to NW. and SE.</p> <p>Set an iron post 3 ft. long 2 ins. diam., 33 ins.in ground for cor. of secs. 13, 14, 23 and 24, with brass cap marked</p> <p style="text-align: center;"> T 7 S R 5 E S 14 S 13 S 23 S 24 1928 </p> <p>Raise a mound of stone 2 ft. base 1$\frac{1}{2}$ ft. high W.of cor.</p> <p>Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: None. Undergrowth: Greasewood, mesquite and sage.</p> <hr/> <p>From the point for cor. of secs. 13, 18, 19 and 24, on E. bdy. of Tp., hereinbefore described. N.89°46'W. on true line bet. secs. 13 and 24. Over level land, along unimproved road, thru undergrowth.</p> <p>40.15 Cor. of fences extending E., W. and S. bears S., 45 lks.dist.</p> <p>40.26 Set an iron post 3 ft. long 1 in. diam., 33 ins.in ground for $\frac{1}{4}$ sec. cor., with brass cap marked</p> <p style="text-align: center;"> $\frac{1}{4}$ S 13 $\frac{1}{4}$ S 24 1928 </p> <p>Raise a mound of stone 2 ft. base 1$\frac{1}{2}$ ft. high N.of cor.</p> <p>62.00 Wash, 25 lks. wide, course NW.</p> <p>80.52 The cor. of secs. 13, 14, 23 and 24.</p> <p>Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: None. Undergrowth: Greasewood, mesquite and sage.</p> <hr/>
--------	---

Resurvey of the Subdivisions
of
T. 7 S. R. 5 E.

BOOK 3843


chains

N.0°07'E. on true line bet. secs. 13 and 14. (S $\frac{1}{2}$)
Over level land, along dim road, thru undergrowth.

.46 Cor. of fences extending N. and W. bears W., 45 lks. dist.
1.40 A house bears W., 3.50 chs. dist.
20.00 Cor. of fences extending S. and W. bears W., 44 lks. dist.
N. end of dim road. Continue thru scattering undergrowth.

40.16 The $\frac{1}{4}$ sec. cor., which is a mesquite stake 3 ins. square,
6 ins. above ground, scribe marks illegible. In place
of stake, which is buried alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked




Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high W. of cor.

Thence, N.0°11'E. on true line bet. secs. 13 and 14. (N $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

14.70 Wash, 20 lks. wide, course NW.
21.40 Wash, 30 lks. wide, course NW.
29.80 Wash, 25 lks. wide, course NW.

40.16 Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 11, 12, 13 and 14, with brass cap marked



Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high W. of cor.


Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

From point for cor. of secs. 7, 12, 13, and 14, on E. bdy.
of Tp., hereinbefore described.
S.89°59'W. on true line bet. secs. 12 and 13. (E $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

20.00 Cor. of fences extending E. and S. bears S., 40 lks. dist.

40.04 The $\frac{1}{4}$ sec. cor., which is a mesquite stake 3 ins. square,
20 ins. above ground, scribe marks illegible. In place
of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked



Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high N. of cor.

Thence, S.89°52'W. on true line bet. secs. 12 and 13. (W $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

40.16 The cor. of secs. 11, 12, 13 and 14.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
No timber: Undergrowth: Greasewood, mesquite, sage.

22.

Resurvey of the Subdivisions

of


T. 7 S., R. 5 E.

chains

N.0°07'E. on true line bet. secs. 11 and 12.
Over level land, thru scattering undergrowth.


35.40 A house bears E., 50 lks. dist.

40.16 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked



Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.

80.32 Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 1, 2, 11 and 12, with brass cap marked




Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite, sage.

From the point for cor. of secs. 1, 6, 7 and 12, on E. bdy.
of Tp., hereinbefore described.
S.89°48'W. on true line bet. secs. 1 and 12.
Over level land, thru scattering undergrowth, along S.
edge of cleared field.

39.88 Cor. of fences extending S. and W. bears S., 14 lks. dist.

39.99 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked



1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.

49.70 Cor. of fences extending S. and E. bears S., 25 lks. dist.

71.00 A wash, 30 lks. wide, course NW.

79.98 The cor. of secs. 1, 2, 11 and 12.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions
of

BOOK 3843

T. 7 S. R. 5 E.

chains

N.0°06'W. on true line bet. secs. 1 and 2, (S $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

- 1.00 Old winding road, bears NE. and SW.
- 11.90 Wash, 30 lks. wide, course NW.
- 23.20 Old winding road, bears NW. and SE.
- 39.65 A shack bears W., 75 lks. dist.

40.16 The $\frac{1}{4}$ sec. cor., which is a mesquite stake, 4 ins. square, 3 ft. long, lying on ground alongside cor. of fences extending N. and E. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
 S 2 | S 1
 1928

Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high W. of cor.

Thence, N.0°19'W. on true line bet. secs. 1 and 2. (N $\frac{1}{2}$)
Over level land, thru scattering undergrowth, along fence.

- 3.70 Old winding road, bears NE. and SW.
- 35.40 Wash, 20 lks. wide, course NW.

40.24 The cor. of secs. 1, 2, 35 and 36, on N. bdy. of Tp., hereinbefore described.

Land: Level.
 Soil: Clayloam, 1st and 2d rate.
 Timber: None.
 Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 2, 3, 34 and 35, on S. bdy. of Tp., hereinbefore described.
N.0°36'W. on true line bet. secs. 34 and 35.
Over level land, thru scattering undergrowth.

10.20 Dim winding road, bears NW. and SE.

40.41 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
 S 34 | S 35
 1928

Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high W. of cor.

.80.82 Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 26, 27, 34 and 35, with brass cap marked

T 7 S R 5 E
 S 27 | S 26
 S 34 | S 35
 1928

Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high W. of cor.

Land: Level.
 Soil: Clayloam, 1st and 2d rate.
 Timber: None.
 Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions

of

T. 7 S. R. 5 E.

chains

From the cor. of secs. 25, 26, 35 and 36.
S. 89° 42' W. on true line bet. secs. 26 and 35.
Over level land, thru scattering undergrowth.

40.05 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\begin{array}{r} \frac{1}{4} S 26 \\ \frac{1}{4} S 35 \end{array}$$

1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.

45.30 Old winding road, bears NE. and SW.

68.60 Wash, 25 lks. wide, course NW.

78.80 Wash, 30 lks. wide, course NW.

80.10 The cor. of secs. 26, 27, 34 and 35.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

N. 0° 2' W. on true line bet. secs. 26 and 27.
Over level land, thru scattering undergrowth.

1.00 Wash, 25 lks. wide, course NW.

40.41 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4}$$

$$S 27 | S 26$$

1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.

80.82 The cor. of secs. 22, 23, 26 and 27, which is a mesquite
stake, 8 ins. square, 2 ft. above ground, marked with
2 notches on E. and 2 notches on S. edges; PIR on N.
side. Alongside is an iron pipe 4 ins. diam., 2 ft.
above ground. In place of stake and pipe, which are
deposited alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 22, 23, 26 and 27, with brass cap marked

$$T 7 S R 5 E$$

$$S 22 | S 23$$

$$S 27 | S 26$$

$$PIR$$

1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.


Timber: None.

Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions
of
T. 7 S., R. 5 E.

chains

From the cor. of secs. 23, 24, 25 and 26.
 S.89°52'W. on true line bet. secs. 23 and 26. (E½)
 Over level land, thru scattering undergrowth.
 North boundary of Papago Indian Reservation.
 40.07 The ¼ sec. cor., which is a mesquite stake 4 ins. square,
 12 ins. above ground and marked ¼ on N. side. In place
 of stake, which is buried alongside,
 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
 for ¼ sec. cor., with brass cap marked



Raise a mound of stone 2 ft. base 1½ ft. high N. of cor.

Thence, S.89°53'W. on true line bet. secs. 23 and 26. (W½)
 Over level land, thru scattering undergrowth.


40.12 The cor. of secs. 22, 23, 26 and 27.

Land: Level.
 Soil: Clayloam, 1st and 2d rate.
 Timber: None.
 Undergrowth: Greasewood, mesquite and sage.

N.0°19'E. on true line bet. secs. 22 and 23.
 Over level land, thru scattering undergrowth.
 From cor., cor. of fences extending N. and W. bears W.,
 45 lks. dist.

1.90 SE. cor. of pump house bears W., 480 lks. dist.
 14.20 Cor. of fences extending S. and W. bears W., 45 lks. dist.
 20.30 Cor. of fences extending N., S. and W. bears W., 30 lks. dist.
 32.00 Cor. of fences extending N., S. and W. bears W., 30 lks. dist.


40.08 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
 for ¼ sec. cor., with brass cap marked



Raise a mound of stone 2 ft. base 1½ ft. high W. of cor.

40.40 Cor. of fences extending N., S. and W. bears W., 24 lks. dist.
 59.00 Cor. of fences extending S. and W. bears W., 25 lks. dist.

80.16 Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
 for cor. of secs. 14, 15, 22 and 23, with brass cap marked



Raise a mound of stone 2 ft. base 1½ ft. high W. of cor.

Land: Level.
 Soil: Clayloam, 1st and 2d rate.
 Timber: None.
 Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions

chains	
	From the cor. of secs. 13, 14, 23 and 24. N. 89° 31' W. on true line bet. secs. 14 and 23. (E $\frac{1}{2}$) Over level land, along roadway, thru undergrowth.
21.10	Cor. of fences extending N. and E. bears N., 45 lks. dist.
40.05	The $\frac{1}{4}$ sec. cor., which is a mesquite stake 3 ins. square, 14 ins. above ground and marked $\frac{1}{4}$ on N. side. In place of stake, which is deposited alongside, Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked $\begin{array}{c} \frac{1}{4} \text{ S } 14 \\ \frac{1}{4} \text{ S } 23 \end{array}$ 1928 Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high W. of cor. Cor. of fences extending N. and W. bears N., 46 lks. dist. Thence, N. 89° 49' W. on true line bet. secs. 14 and 23. (W $\frac{1}{2}$) Over level land, thru scattering undergrowth.
9.80	Cor. of fences extending N. and W. bears N., 46 lks. dist.
40.18	The cor. of secs. 14, 15, 22 and 23. Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: None. Undergrowth: Greasewood, mesquite and sage.
	N. 0° 01' E. on true line bet. secs. 14 and 15. Over level land, thru scattering undergrowth.
.62	Cor. of fences extending N. and W. bears W., 39 lks. dist.
2.10	SE. cor. of pump house bears W., 1.30 chs. dist.
3.90	SE. cor. of house bears W., 1 $\frac{1}{2}$ chs. dist.
5.70	Cor. of fences extending N., S. and W. bears W., 40 lks. dist.
10.70	Cor. of fences extending N., S. and W. bears W., 45 lks. dist.
20.20	Cor. of fences extending S. and W. bears W., 48 lks. dist.
40.08	Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked $\frac{1}{4}$ $\begin{array}{c} \text{S } 15 \text{ } \text{S } 14 \end{array}$ 1928 Raise a mound of stone 3 ft. base 2 ft. high W. of cor.
80.16	Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 10, 11, 14 and 15, with brass cap marked $\begin{array}{c} \text{T } 7 \text{ S } \text{R } 5 \text{ E} \\ \text{S } 10 \text{ } \text{S } 11 \\ \text{S } 15 \text{ } \text{S } 14 \end{array}$ 1928 Raise a mound of stone 3 ft. base 2 ft. high W. of cor. Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: None. Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions
of
T. 7 S. R. 5 E.


BOOK 3848

chains

From the cor. of secs. 11, 12, 13 and 14.
N. 89° 45' W. on true line bet. secs. 11 and 14.
Over level land, thru scattering undergrowth.

- 4.20 Wash, 20 lks. wide, course NW.
- 7.90 Wash, 25 lks. wide, course NW.

40.16 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for 1/4 sec. cor., with brass cap marked



Raise a mound of stone 2 ft. base 1 1/2 ft. high N. of cor.

- 40.34 Cor. of fences extending S. and W. bears S., 27 lks. dist.
- 60.00 Cor. of fences extending S. and E. bears S., 15 lks. dist.
- 67.80 Old winding road, bears N. and S.


80.32 The cor. of secs. 10, 11, 14 and 15.

Land: Level.
Soil: Clayloam, 1st and 2d. rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

N. 0° 09' E. on true line bet. secs. 10 and 11.
Over level land, thru scattering undergrowth.

- 2.50 Old winding road, bears NE. and SW.


40.08 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for 1/4 sec. cor., with brass cap marked



Raise a mound of stone 2 ft. base 1 1/2 ft. high W. of cor.

80.16 The cor. of secs. 2, 3, 10 and 11, which is a mesquite stake 5 ins. square, 8 ins. above ground, scribe marks illegible. Alongside is an iron pipe 1/2 in. diam., 1 ins. above ground. In place of stake and pipe, which are deposited alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 2, 3, 10 and 11, with brass cap marked



Raise a mound of stone 2 ft. base 1 1/2 ft. high W. of cor.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions

of

T. 7 S., R. 5 E.

chains

From the cor. of secs. 1,2,11 and 12.
N.89°55'W. on true line bet. secs. 2 and 11.
Over level land, thru scattering undergrowth.

1.70 Old winding road, extends NE. and SW.

40.12 The 1/4 sec. cor., which is a mesquite stake 4 ins. square,
2 1/4 ins. above ground and marked 1/4 S on N. side. Along-
side is an iron rod, 1 in. diam., 6 ins. above ground.
In place of stake and rod, which are deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for 1/4 sec. cor., with brass cap marked

1/4 S 2
1/4 S 11

1928

Raise a mound of stone 2 ft. base 1 1/2 ft. high N. of cor.

Continue measure, same course, on true line bet. secs. 2
and 11.

68.00 Wash, 60 lks. wide, course NW.

80.24 The cor. of secs. 2,3,10 and 11.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, sage and mesquite.

N.0°12'W. on true line bet. secs. 2 and 3.
Over level land, thru scattering undergrowth.

20.00 Cor. of fences extending N. and E. bears E., 50 lks. dist.

26.00 Wash, 25 lks. wide, course NW.

39.96 Cor. of fences extending N. and W. bears W., 38 lks. dist.

40.19 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for 1/4 sec. cor., with brass cap marked

1/4
S 3 | S 2

1928

Raise a mound of stone 2 ft. base 1 1/2 ft. high W. of cor.
Fence extending N. and S. bears E., 57 lks. dist.

80.30 The cor. of secs. 2,3,34 and 35, on N. bdy. of Tp., here-
inbefore described.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, sage and mesquite.

Resurvey of the Subdivisions

BOOK 3843


T. 7 S., R. 5 E.

chains

From the cor. of secs. 3, 4, 33 and 34, on S. bdy. of Tp.,
hereinbefore described.
N.0°18'W. on true line bet. secs. 33 and 34.
Over level land, thru scattering undergrowth.


- 11.00 Ascend 25 ft. over rolling SE. slope.
- 14.00 Spur on small butte, slopes E.; descend 25 ft.
- 17.00 Continue over level land. Base of butte bears SE. and W.

40.18 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for 1/4 sec. cor., with brass cap marked



Raise a mound of stone 2 ft. base 1 1/2 ft. high W. of cor.

80.36 Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 27, 28, 33 and 34, with brass cap marked




Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Land: Level.
 Soil: Clayloam, 1st and 2d rate.
 Timber: None.
 Undergrowth: Greasewood, mesquite, sage.

From the cor. of secs. 26, 27, 34 and 35.
S.89°42'W. on true line bet. secs. 27 and 34.
Over level land, thru scattering undergrowth.

14.00 Wash, 20 lks. wide, course NW.

39.93 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for 1/4 sec. cor., with brass cap marked




Raise a mound of stone 2 ft. base 1 1/2 ft. high N. of cor.

79.86 The cor. of secs. 27, 28, 33 and 34.

Land: Level.
 Soil: Clayloam, 1st and 2d rate.
 Timber: None.
 Undergrowth: Greasewood, mesquite, sage.

N.0°31'E. on true line bet. secs. 27 and 28.
Over level land, thru scattering undergrowth.

40.18 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for 1/4 sec. cor., with brass cap marked



Raise a mound of stone 2 ft. base 1 1/2 ft. high W. of cor.

Resurvey of the Subdivisions
of
T. 7 S., R. 5 E.

chains

67.90 Wash, 25 lks. wide, course NW.

80.36 The cor. of secs. 21,22,27 and 28, on N. bdy. of Papago Indian Reservation, which is a mesquite stake 5 ins. square, 2 ft. above ground and marked T VII S S XXII on NE., RVE SXXVII on SE., SXXVIII on SW. and SXXI on NW. side. In place of stake, which is deposited alongside,
Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 21,22,27 and 28, with brass cap marked

T 7 S R 5 E
S 21 | S 22
S 28 | S 27
PIR.
1928

Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite, sage.

From the cor. of secs. 22,23,26 and 27.
S. 89°26'W. on true line bet. secs. 22 and 27, N. bdy. of Papago Indian Reservation.
Over level land, thru scattering undergrowth.

7.50 Cor. of fences extending N. and E. bears N., 2 lks. dist.

39.56 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 22
 $\frac{1}{4}$ S 27

PIR
1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.

79.12 The cor. of secs. 21,22,27 and 28.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite, sage.

N. 0°15'W. on true line bet. secs. 21 and 22. ($S\frac{1}{2}$)
Over level land, thru scattering undergrowth.

17.70 Wash, 30 lks. wide, course NW.

36.10 Old winding road, bears NE. and SW.

40.24 The $\frac{1}{4}$ sec. cor., which is a rotted mesquite stake, 3 ins. square, 10 ins. above ground, scribe marks illegible. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 21 | S 22

1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.

Resurvey of the Subdivisions
of
T. 7 S. R. 5 E.

chains

40.17 Thence, N.0°19'W. on true line bet. secs. 21 and 22. (N½)
Over levelland, thru scattering undergrowth.

The cor. of secs. 15,16,21 and 22, which is a mesquite stake, 4 ins. square, 2 ft. long, lying on ground, scribe marks not legible. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins.in ground for cor. of secs. 15,16,21 and 22, with brass cap marked

T 7 S R 5 E
S 16 | S 15
S 21 | S 22
1928

Raise a mound of stone 2 ft. base 1½ ft. high W.of cor.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite, sage.

19.50 From the cor. of secs. 14,15,22 and 23.
S.89°37'W. on true line bet. secs. 15 and 22.
Over level land, thru scattering undergrowth.

Cor. of fences extending N. and E. bears N.,60 lks.dist.

39.95 The ¼ sec. cor., which is a mesquite stake 4 ins. square, 2½ ft. long, lying on ground, scribe marks not legible. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins.in ground for ¼ sec. cor., with brass cap marked

¼ S 15
¼ S 22
1928

Raise a mound of stone 2 ft. base 1½ ft. high N.of cor.

Continue measure, same course, true line bet. secs.15 and 22.

50.00 Old winding road, bears NE. and SW.

79.91 The cor. of secs. 15,16,21 and 22.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite, sage.

22.80 North on true line bet. secs. 15 and 16.
Over level land, thru scattering undergrowth.

Old winding road, bears NE. and SW.

40.18 Set an iron post 3 ft. long 1 in. diam., 33 ins.in ground for ¼ sec. cor., with brass cap marked

¼
S 16 | S 15
1928

Raise a mound of stone 2 ft. base 1½ ft. high W.of cor.

Resurvey of the Subdivisions
of

E. 7 S. 10 E.

chains

40.68 Cor. of fences extending N. and E. bears E., 49 lks. dist.
80.19 Cor. of fences extending S. and E. bears E., 19 lks. dist.

80.36 Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 9, 10, 15 and 16, with brass cap marked

$$\begin{array}{r} T \ 7 \ S \ R \ 5 \ E \\ \quad S \ 9 \ S \ 10 \\ \quad \hline S \ 16 \ S \ 15 \\ \quad \quad 1928 \end{array}$$

Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite, sage.

From the cor. of secs. 10, 11, 14 and 15.
S. 89° 50' W. on true line bet. secs. 10 and 15.
Over level land, thru scattering undergrowth.

2.50 Old winding road, bears NE. and SW.

39.75 Cor. of fences extending S. and W. bears S., 43 lks. dist.

40.01 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked.

$$\begin{array}{r} \frac{1}{4} \ S \ 10 \\ \quad \frac{1}{4} \ S \ 15 \\ \quad \quad 1928 \end{array}$$

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.

42.60 A house bears N., 400 lks. dist.

79.92 Dim winding road extending N. and S.

80.02 The cor. of secs. 9, 10, 15 and 16.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

N. 0° 05' W. on true line bet. secs. 9 and 10. ($S\frac{1}{2}$)
Over level land, thru scattering undergrowth, along road.

.37 Cor. of fences extending N. and W. bears W., 28 lks. dist.

40.18 The $\frac{1}{4}$ sec. cor., (local) which is an iron pipe 1 in. diam.,
4 ins. above ground. This is a perpetuation of orig.
point for cor. In place of pipe, which is buried alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\begin{array}{r} \frac{1}{4} \\ \quad S \ 9 \ S \ 10 \\ \quad \quad 1928 \end{array}$$

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.
Fence extending N. And S. bears W., 47 lks. dist.

Thence, N. 0° 09' W. on true line bet. secs. 9 and 10. ($N\frac{1}{2}$)
Over level land, along road, thru scattering undergrowth.

39.75 Cor. of fences extending S. and W. bears W., 47 lks. dist.
40.19 The accepted (local) cor. of secs. 3, 4, 9 and 10, which is


Resurvey of the Subdivisions
of
T. 7. S., R. 5. E.

BOOK 3843

chains

an iron pipe, 1 in. diam., 3 ins. above ground. This is a perpetuation of orig. point for cor. In place of pipe, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. in diam., 33 ins. in ground for cor. of secs., 3, 4, 9 and 10, with brass cap marked




Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 2, 3, 10 and 11.
West on true line bet. secs. 3 and 10.
Over level land, thru scattering undergrowth.

40.17 The $\frac{1}{4}$ sec. cor., which is an iron rod 1 in. diam., 12 ins. above ground. This is a local reestablishment. In place of rod, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked



Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high N. of cor.

Continue measure, same course, true line bet. secs. 3 and 10.

80.36 The cor. of secs. 3, 4, 9 and 10.


Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

N. 0° 06' W. on true line bet. secs. 3 and 4.
Over level land, thru scattering undergrowth, along dim road.

.20 Dim winding road, bears E. and W.
.46 Cor. of fences extending N. and W. bears W., 47 lks. dist.

40.00 Cor. of fences extending S. and W. bears W., 42 lks. dist.
40.03 Cor. of fences extending N. and E. bears E., 58 lks. dist.

40.19 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked



Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high W. of cor.

80.21 The cor. of secs., 3, 4, 33 and 34, on N. bdy. of Tp., hereinbefore described.

Land: Level.
Soil: Clayloam, 1st and 2d rate. Timber: None.
Undergrowth: Sage, mesquite and greasewood.

Resurvey of the Subdivisions
of
T. 7 S., R. 5 E.

chains	<p>From the cor. of secs. 4, 5, 32 and 33 on S. bdy. of Tp., hereinbefore described. N.0°10'E. on true line bet. secs. 32 and 33. Over level land, thru scattering undergrowth.</p>
40.12	<p>Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked</p> $\begin{array}{c} \frac{1}{4} \\ \text{S } 32 \text{S } 33 \\ 1928 \end{array}$ <p>Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.</p>
68.00	<p>Dim winding road, bears NE. and SW.</p>
80.24	<p>Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 28, 29, 32 and 33, with brass cap marked</p> $\begin{array}{c} \text{T } 7 \text{ S. R } 5 \text{ E.} \\ \text{S } 29 \text{S } 28 \\ \text{S } 32 \text{S } 33 \\ 1928 \end{array}$ <p>Raise a mound of stone 3 ft. base 2 ft. high W. of cor.</p> <p>Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: None. Undergrowth: Greasewood, mesquite, sage.</p> <hr/>
40.00	<p>From the cor. of secs. 27, 28, 33 and 34. N.89°35'W. on true line bet. secs. 28 and 33. Over level land, thru scattering undergrowth.</p> <p>Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked</p> $\begin{array}{c} \frac{1}{4} \text{ S } 28 \\ \text{S } 33 \end{array}$ <p>1928</p> <p>Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.</p>
65.20	<p>Dim winding road, bears NE. and SW.</p>
80.00	<p>The cor. of secs. 28, 29, 32 and 33.</p> <p>Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: None. Undergrowth: Greasewood, mesquite and sage.</p> <hr/>
40.12	<p>N.0°25'W. on true line bet. secs. 28 and 29. Over level land, thru scattering undergrowth.</p> <p>Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked</p> $\begin{array}{c} \frac{1}{4} \\ \text{S } 29 \text{S } 28 \\ 1928 \end{array}$ <p>Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.</p>

Resurvey of the Subdivisions
of
T. 7 S., R. 5 E.

BOOK 3843

chains

80.24

The cor. of secs. 20, 21, 28 and 29, on N. bdy. of Papago Indian Reservation, which is a mesquite stake $\frac{1}{4}$ ins. square, 2 ft. above ground and marked PIR on N side, with $\frac{1}{4}$ notches on E. and 2 notches on S. edge. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 20, 21, 28 and 29, on N. bdy. of Papago Indian Reservation, with brass cap marked

T 7 S R 5 E
S 20 | S 21
S 29 | S 28
PIR
1928

Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 21, 22, 27 and 28.

N. $89^{\circ}17'W$. on true line bet. secs. 21 and 28, N. bdy. of Papago Indian Reservation. ($E\frac{1}{2}$)

Over level land, thru scattering undergrowth.

17.50 Wash, 25 lks. wide, course NW.

23.90 Old winding road, bears NE. and SW.

37.80 Wash, 30 lks. wide, course NW.

41.19 The $\frac{1}{4}$ sec. cor., which is a mesquite stake $\frac{1}{4}$ ins. square, 8 ins. above ground, no scribe marks visible. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 21
 $\frac{1}{4}$ S 28
PIR
1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.

Thence, S. $89^{\circ}53'W$. on true line bet. secs. 20 and 29. ($W\frac{1}{2}$)
Over level land, thru scattering undergrowth.

6.50 Wash, 20 lks. wide, course NW.

40.09 The cor. of secs. 20, 21, 28 and 29.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

BOOK 3843

Resurvey of the Subdivisions

of

T. 7. S., R. 5. E.

chains

N.0°22'E. on true line bet. secs. 20 and 21.
Over level land, thru scattering undergrowth.

40.00 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 20 | S 21
1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.

44.20 Wash, 30 lks. wide, course NW.

44.60 Old winding road, bears NE. and SW.

80.00 Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 16, 17, 20 and 21, with brass cap marked

T 7 S R 5 E
S 17 | S 16
S 20 | S 21
1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 15, 16, 21 and 22.
S.89°57'W. on true line bet. secs. 16 and 21.
Over level land, thru scattering undergrowth.

40.19 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 16
S 21
1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.

41.70 Old winding road, bears NE. and SW.

58.30 Wash, 30 lks. wide, course NW.

80.38 The cor. of secs. 16, 17, 20 and 21.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

N.0°01'E. on true line bet. secs. 16 and 17. (S $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

8.70 Wash, 30 lks. wide, course NW.

40.00 The $\frac{1}{4}$ sec. cor., which is a mesquite stake, 4 ins. square,
18 ins. above ground, scribe marks not legible. In place
of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 17 | S 16
1928


Resurvey of the Subdivisions

of.

T. 7 S., R. 5 E.

chains Thence, N.0°10'W. on true line bet. secs. 16 and 17. (N $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

40.16 Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 8, 9, 16 and 17, with brass cap marked



Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Land: Level.


Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 9, 10, 15 and 16.
S.89°50'W. on true line bet. secs. 9 and 16.
Over level land, thru scattering undergrowth.

40.21 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked



Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high N. of cor.
Fence extending E. and W. bears N., 48 lks. dist.

80.42 The cor. of secs. 8, 9, 16 and 17.

Land: Level.

Soil: Clayloam, 1st and 2d rate.


Timber: None.

Undergrowth: Greasewood, mesquite, sage.

N00°01'W. on true line bet. secs. 8 and 9.
Over level land, thru scattering undergrowth.

.47 Fence, extends E. and W.

40.16 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked




Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

79.85 Fence, extends E. and W.

80.32 The cor. of secs. 4, 5, 8 and 9, which is a mesquite stake
4 ins. square, 18 ins. above ground and marked TVIIS SIX
on NE., RV SIX on SE., SVIII on SW. and SV on NW. side.
In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 4, 5, 8 and 9, with brass cap marked



Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Resurvey of the Subdivisions
of
T. 7 S., R. 5. E.

chains

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 3, 4, 9 and 10.
S. 89° 48' W. on true line bet. secs. 4 and 9.
Over level land, thru scattering undergrowth, along old road.

40.22 The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square,
24 ins. above ground and marked $\frac{1}{4}$ S on N. side. In
place of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\begin{array}{c} \frac{1}{4} \text{ S } 4 \\ \frac{1}{4} \text{ S } 9 \end{array}$$

1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.

Cor. of fences extending N. and E. bears N., 47 lks. dist.
Fence extending E. and W. bears S., 41 lks. dist.

Continue measure, same course, true line bet. secs. 4 and 9.

80.34 The cor. of secs. 4, 5, 8 and 9.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

N. 0° 04' W. on true line bet. secs. 4 and 5.
Over level land, thru scattering undergrowth.

40.19 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 5 \text{ | } \text{S } 4 \end{array}$$

1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.

44.80 Old winding road, bears NW. and SE.

80.47 The cor. of secs. 4, 5, 32 and 33, on N. bdy. of Tp., here-
inbefore described.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Mesquite, sage and greasewood.

Resurvey of the Subdivisions
of
T. 7 S., R. 5 E.

BOOK 3848


chains

From the cor. of secs. 5,6,31 and 32, on S. bdy. of Tp.,
hereinbefore described.
N. 0°02'W. on true line bet. secs. 31 and 32.
Over level land, thru scattering undergrowth.

40.12

The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square,
2 ft. long, lying on ground, scribe marks not legible.
In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked




Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.

Continue measure, same course, true line bet. secs. 31 and 32.

80.24

The cor. of secs. 29,30,31 and 32, which is a mesquite
stake, 4 ins. square, 12 ins. above ground, scribe
marks not legible. In place of stake, which is depos-
ited alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 29,30,31 and 32, with brass cap marked



Raise a mound of stone 3 ft. base 2 ft. high W. of cor.


Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite, sage.

From the cor. of secs. 28,29,32 and 33.
S. 89°50'W. on true line bet. secs. 29 and 32.
Over level land, thru scattering undergrowth.

40.18

The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square,
lying on the ground, scribe marked $\frac{1}{4}$ S on one side.
In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked



Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.

Continue measure, same course, true line bet. secs. 29 and 32.

80.36

The cor. of secs: 29,30,31 and 32.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions
of
T. 7 S. R. 5 E.

chains

The cor. of secs. 30 and 31, only, on W. bdy. of Tp., is an iron post 3 ins. diam., 10 ins. above ground, with brass cap marked

T	7	S
R	5	E
S	30	
S	31	

1915

Alongside, is the orig. cor. of secs. 25, 30, 31 and 36, which is a mesquite stake 4 ins. square, 18 ins. above ground, marked with 1 notch on S. and 5 notches on N. edge.

Thence, N. 89° 57' E. on true line bet. secs. 30 and 31. Over level land, thru scattering undergrowth.

31.70

Winding road, bears NE. and SW.

39.20

The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square, 2 ft. long, lying on ground, scribe marks not legible. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S	30
$\frac{1}{4}$	S	31

1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.

Continue measure, same course, true line bet. secs. 30 and 31.

79.32

The cor. of secs. 29, 30, 31 and 32.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

N. 0° 16' W. on true line bet. secs. 29 and 30. Over level land, thru scattering undergrowth.

40.12

The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square, (2 ft. long, lying on ground, scribe marks not legible. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S	30		S	29
$\frac{1}{4}$	S	30		S	29

1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.

Continue measure, same course, true line bet. secs. 29 and 30.

80.24

The cor. of secs. 19, 20, 29 and 30, which is a mesquite stake, 5 ins. square, 18 ins. above ground, marked PIR on N. side with 5 notches on E. and 2 notches on S. edge. This is on the N. boundary of Papago Indian Reservation. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 19, 20, 29 and 30, on N. bdy. of Papago Indian Reservation, with brass cap marked

Resurvey of the Subdivisions

of

T. 7 S. R. 5 E.

chains

T 7 S R 5 E
 S 19 | S 20
 S 30 | S 29
 P1R
 1928

Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Land: Level.
 Soil: Clayloam, 1st and 2d rate.
 Timber: None.
 Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 20, ~~21~~, 28 and 29.
 S. 89° 53' W. on true line bet. secs. 20 and 29. (E 1/2)
 Over level land, thru scattering undergrowth.
 On N. bdy. of Papago Indian Reservation.

36.50 Wash, 30 lks. wide, course NW.

40.10 The 1/4 sec. cor., which is a mesquite stake 4 ins. square,
 16 ins. above ground, marked 1/4 on N. side. In place
 of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
 for 1/4 sec. cor., with brass cap marked

1/4 S 20
 1/4 S 29
 P1R
 1928

Raise a mound of stone 2 ft. base 1 1/2 ft. high N. of cor.

Thence, S. 89° 52' W. on true line bet. secs. 20 and 29. (W 1/2)
 Over level land, thru scattering undergrowth.

4.50 Old winding road, bears NE. and SW.

40.09 The cor. of secs. 19, 20, 29 and 30.

Land: Level.
 Soil: Clayloam, 1st and 2d rate.
 Timber: None.
 Undergrowth: Greasewood, mesquite and sage.

The cor. of secs. 19 and 30, only, on W. bdy. of Tp., is
 an iron post 3 ft. long 12 ins. above ground, with brass
 cap marked

T 7 S
 R 5 E
 S 19
 S 30

1915

Alongside is the orig. cor. of secs. 19, 24, 25 and 30,
 which is a mesquite stake 4 ins. square, 18 ins. above
 ground, scribe marks illegible.

Thence, N. 89° 54' E. on true line bet. secs. 19 and 30.
 Over level land, thru scattering undergrowth.
 On N. bdy. of Papago Indian Reservation.

38.88 The 1/4 sec. cor., which is a mesquite stake 4 ins. square,
 12 ins. above ground, marked 1/4 S on N. side. In place
 of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
 for 1/4 sec. cor., with brass cap marked

Resurvey of the Subdivisions
of
T. 7 S., R. 5 E.

chains

$$\frac{1}{4} \frac{S 19}{S 30}$$

PIR
1928

- 79.01 Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.
Continue measure, same course, true line, bet. secs. 19 and 30.
The cor. of secs. 19, 20, 29 and 30.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

- 40.03 N. $0^{\circ}17'E$. on true line bet. secs. 19 and 20.
Over level land, thru scattering undergrowth.
Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4}$$

$$S 19 | S 20$$

1928

- 80.06 Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.
The cor. of secs. 17, 18, 19 and 20, which is a mesquite
stake 4 ins. square, 10 ins. above ground, scribe marks
not legible. In place of stake, which is deposited
alongside,
Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 17, 18, 19 and 20, with brass cap marked

$$T 7 S R 5 E$$

$$S 18 | S 17$$

$$S 19 | S 20$$

1928

- Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.
Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Mesquite, greasewood, and sage.

- 40.16 From the cor. of secs. 16, 17, 20 and 21.
N. $89^{\circ}57'W$. on true line bet. secs. 17 and 20. ($E\frac{1}{2}$)
Over level land, thru scattering undergrowth.
The $\frac{1}{4}$ sec. cor., which is a mesquite stake 5 ins. square,
18 ins. above ground, marked $\frac{1}{4}$ on N. side. In place
of stake, which is deposited alongside,
Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4} \frac{S 17}{S 20}$$

1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high, N. of cor.

Resurvey of the Subdivisions
of
T. 7 S. R. 5 E.

BOOK 3843

$\frac{1}{4}$ S 7
S 18

1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.

- 55.65 Wash, 50 lks. wide, course NW.
- 66.00 Road, winding, bears NE. and SW.
- 67.85 Cor. of fences extending S. and E. bears S., 46 lks. dist.
- 79.55 The cor. of secs. 7, 8, 17 and 18.

Land: Level.
 Soil: Clayloam, 1st and 2d rate.
 Timber: None.
 Undergrowth: Greasewood, mesquite and sage.

N.0°01'W. on true line bet. secs. 7 and 8.
Over level land, thru scattering undergrowth.

- .47 Cor. of fences extending N., S. and E. bears E., 46 lks. dist.
- 40.21 The $\frac{1}{4}$ sec. cor., which is an iron pipe 2 ins. diam., 1 ins. above ground. This is a local perpetuation of orig. point for cor. In place of pipe, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 7 | S 8

1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.
Cor. of fences extending N. and W. bears W., 45 lks. dist.
Fence extending N. and S. bears E., 45 lks. dist.

- Continue measure, same course, true line bet. secs. 7 and 8. Along old road, bears N. and SW.
- 41.00 A house bears E., 110 lks. dist.
- 45.50 4 houses, deserted, bear E. on a line, 2, 4, 6 and 8 chs. dist., respectively.
- 79.96 Cor. of fences extending S. and E. bears E., 46 lks. dist.
Cor. of fences extending S. and W. bears W., 50 lks. dist.

- 80.42 The cor. of secs. 5, 6, 7 and 8, which is an iron pipe 2 ins. diam., 1 in. above ground. This is a local perpetuation of orig. point for cor. In place of pipe, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 5, 6, 7 and 8, with brass cap marked

T 7 S R 5 E
S 6 | S 5
S 7 | S 8
1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.

Land: Level.
 Soil: Clayloam, 1st and 2d rate.
 Timber: None.
 Undergrowth: Greasewood, mesquite and sage.

BOOK 3843

Resurvey of the Subdivisions

of

T. 7. S. R. 5. E.

chains

From the cor. of secs. 4, 5, 8 and 9. S. 89°59'W. on true line bet. secs. 5 and 8. (E 1/2) Over level land, thru scattering undergrowth, on old road.

40.08

The 1/4 sec. cor., which is an iron pipe 2 ins. diam., 8 ins. above ground. This is a local perpetuation of orig. point for cor. In place of pipe, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for 1/4 sec. cor., with brass cap marked

1 S 5 / 4 S 8

1928

Raise a mound of stone 2 ft. base 1 1/2 ft. high N. of cor. Cor. of fences extending E., W. and S. bears S., 45 lks. dist.

Thence, N. 89°56'W. on true line bet. secs. 5 and 8. (W 1/2) Over level land, thru scattering undergrowth, on old road.

40.05

The cor. of secs. 5, 6, 7 and 8.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

The cor. of secs. 6 and 7, only, on W. bdy. of Tp. is an iron post, 3 ins. diam., 10 ins. above ground, with brass cap marked

T 7 S / R 5 E / S 6 / S 7

1915

Alongside is the orig. cor. of secs. 1, 6, 7 and 12, which is a mesquite stake 4 ins. square, 8 ins. above ground, scribe marks not legible.

Thence, S. 89°52'E. on true line bet. secs. 6 and 7. Over level land, thru scattering undergrowth, near old road, bears E. and W. to N. of line.

.25. Old winding road, bears N. and S.

39.41

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for 1/4 sec. cor., with brass cap marked

1 S 6 / 4 S 7

1928

Raise a mound of stone 2 ft. base 1 1/2 ft. high N. of cor.

59.84

Cor. of fences extending S. and E. bears S., 47 lks. dist.

79.84

The cor. of secs. 5, 6, 7 and 8.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions
of

BOOK 3843

T. 7 S. R. 5 E.


6.20 Thence, S.89°40'W. on true line bet. secs.17 and 20. (W $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

40.10 Wash, 30 lks. wide, course NW.

The cor. of secs. 17,18,19 and 20.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

The cor. of secs. 18 and 19, only, on W.bdy. of Tp., is
an iron post 3 ins. diam., 10 ins. above ground, with
brass cap marked




1915

Alongside is the orig. cor. of secs. 13,18,19 and 24,
which is a mesquite stake 4 ins. square, 12 ins. above
ground, with scribe marks not legible.

Thence, S.89°49'E. on true line bet. secs. 18 and 19.
Over level land, thru scattering undergrowth.

39.31 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked



1928

Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high N. of cor.

52.00 Old winding road, bears NE. and SW.


79.62 The cor. of secs. 17,18,19 and 20.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

N.0°01'E. on true line bet. secs. 17 and 18.
Over level land, thru scattering undergrowth.

40.08 Fence, extends E. and W.

40.14 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked



1928

Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high W. of cor.

44.00 A house bears W., about 13 chs. dist.

49.00 A house bears W., about 13 chs. dist.

63.10 Wash, 40 lks. wide, course NW.

79.83 Cor. of fences extending N. and W. bears E., 46 lks. dist.

80.28 The cor. of secs. 7,8,17 and 18, which is an iron pipe,

7
7

Resurvey of the Subdivisions
of
T. 7 S. R. 5 E.

chains

2 ins. diam., 8 ins. above ground. This is a local perpetuation of orig. point for cor. In place of pipe, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 7, 8, 17 and 18, with brass cap marked

T 7 S R 5 E
S 7 | S 8
S 18 | S 17

1928

Raise a mound of stone 2 ft. base 1 1/2 ft. high, W. of cor.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 8, 9, 16 and 17.
S. 89° 52' W. on true line bet. secs. 8 and 17. (E 1/2)
Over level land, thru scattering undergrowth.

39.55 Cor. of fences extending E. and SW. bears N., 46 lks. dist.

40.12 The 1/4 sec. cor., which is an iron pipe 2 ins. diam., 8 ins. above ground. This is a local perpetuation of orig. point for cor. In place of pipe, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for 1/4 sec. cor., with brass cap marked

1/4 S 8

S 17
1928

Raise a mound of stone 2 ft. base 1 1/2 ft. high N. of cor.
Cor. of fences extending N. and W. bears N., 46 lks. dist.
Cor. of fences extending S. and NE. bears S., 48 lks. dist.

Thence, N. 89° 55' W. on true line bet. secs. 8 and 17. (W 1/2)
Over level land, thru scattering undergrowth.

39.48 Fence, extends N. and S.

40.04 The cor. of secs. 7, 8, 17 and 18.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

The cor. of secs. 7 and 18 only, on W. bdy. of Tp., is an iron post 3 ins. diam., 10 ins. above ground, with brass cap marked

T 7 S
R 5 E
S 7

S 18
1915

Thence, S. 89° 48' E. on true line bet. secs. 7 and 18.
Over level land, thru scattering undergrowth.

39.32 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for 1/4 sec. cor., with brass cap marked


Resurvey of the Subdivisions
of
T. 7 S. R. 5 E.

BOOK 3843

Chains

40.28 N.0°15'W. on true line bet. secs. 5 and 6.
Over level land, thru scattering undergrowth, along road.

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for 1/4 sec. cor., with brass cap marked



Raise a mound of stone 2 ft. base 1 1/2 ft. high W. of cor.

80.52 The cor. of secs. 5, 6, 31 and 32, on N. bdy. of Tp., hereinbefore described.

- Land: Level.
- Soil: Clayloam, 1st and 2d rate.
- Timber: None.
- Undergrowth: Greasewood, mesquite and sage.

The continued satisfactory adjustment of the transit used in the execution of the resurveys in T.6 S., R.7 E., described in the foregoing field notes, is indicated from field tests of said instrument as described in book "K" of this group.

General Description

This township is situated in the valley of the Santa Cruz wash, a tributary to the Gila River. Land is level and drainage is northwesterly. Elevation above sea level is about 1400 ft. Soil is a clayloam, generally 1st and 2 rate, readily tillable and good soil for agricultural purposes if water can be secured for irrigating.

There is no surface water in the township and but few wells, it being still in an undeveloped state.

There is no timber, and undergrowth is scattering and consists of mesquite, sage and greasewood. The mesquite is scattering but grows to a size fit to be used for firewood.

There is no indication of mineral activity in the township.

CERTIFICATE OF UNITED STATES SURVEYOR.

BOOK 3843

I, Otis O. Gould, U.S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer, for Group 150, Arizona bearing date of the 18th day of February, 1928, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the South Boundary East Boundary North Boundary and Subdivision Lines of Township 7 South Range 5 East of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer, for Group 150, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place: Phoenix, Arizona.

Date: May 12, 1928.

Signature of Otis O. Gould, U.S. Transitman.

APPROVAL.

OFFICE OF U.S. SUPERVISOR OF SURVEYS,

Denver, Colo., JUL 15 1929, 192

The foregoing field notes of the survey of the South Boundary.

East Boundary

North Boundary

and Subdivision Lines of

Township 7 South Range 5 East

of the Gila and Salt River Base and Meridian, in the State of Arizona

executed by Otis O. Gould, U.S. Transitman

under the special instructions dated February 18, 1928 for Group 150, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Signature of U.S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above described surveys in

has been correctly copied from the original notes on file in this office.

U. S. Surveyor General