

Book "N"

4-679

BOOK 3847

FIELD NOTES

OF RETRACEMENT OF

First Standard Parallel South, thru Part of Range 10 East

AND OF RESURVEY OF

East Boundary

and

Subdivision Lines

of

Township 6 South, Range 9 East

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

Otis O. Gould, U.S. Transitman

In the capacity of U. S. Surveyor, ^{Supplemental} under Special Instructions dated March 24, 1928, issued by the District Cadastral Engineer to govern surveys included in Group No. 150 Arizona, which were approved by the Commissioner of the General Land Office, April 13, 1928, and Assignment Instructions dated March 10, 1928.

Retracement & Resurvey commenced April 24, 1928.


Retracement & Resurvey completed May 4, 1928.

3847

3847

~~INDEX DIAGRAM.~~

Township _____, *Range* _____

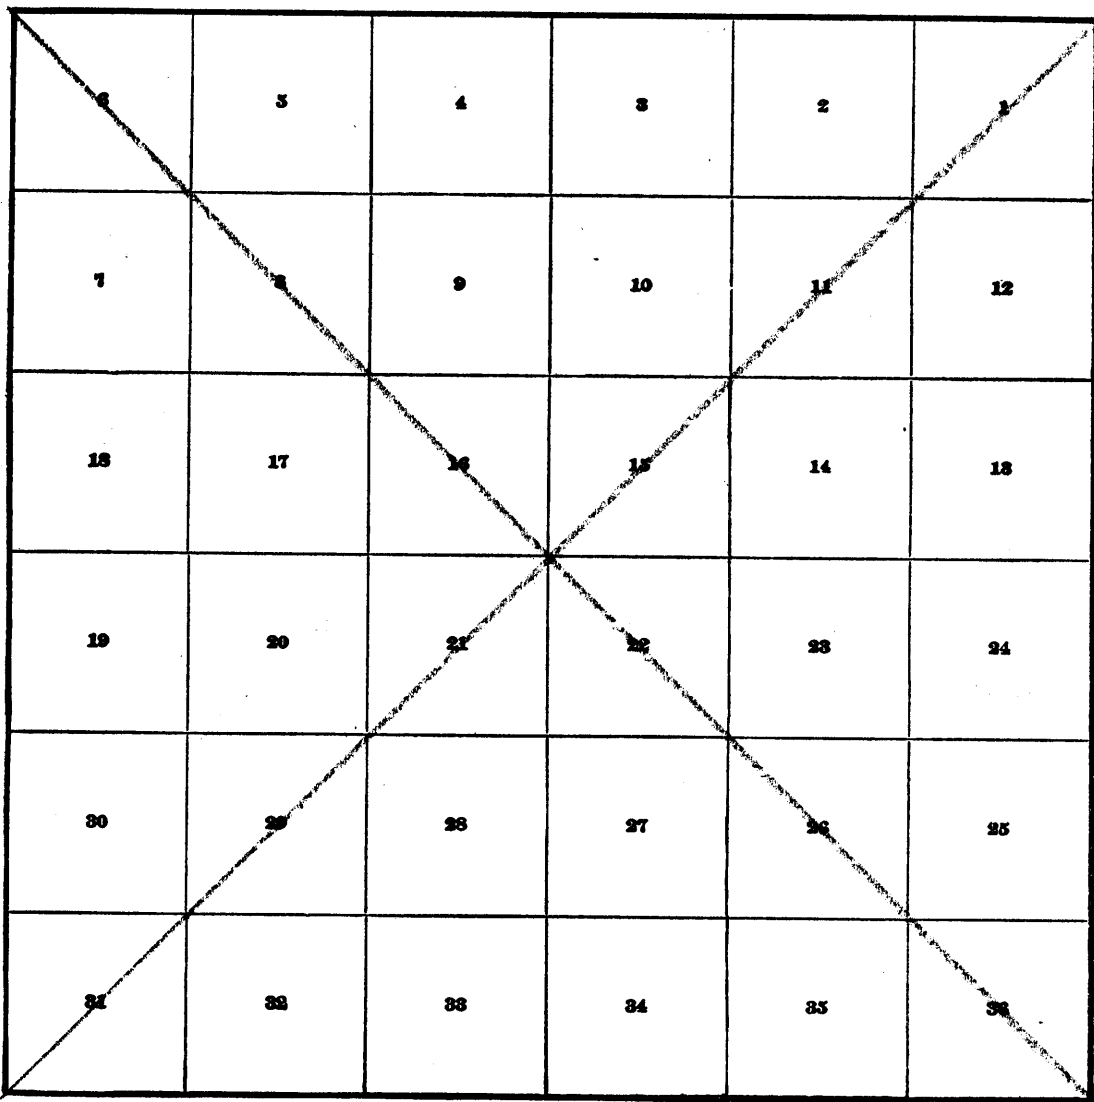


1A

Book "N"
 Group 150 Arizona
 Township 6 South Range 9 East

INDEX DIAGRAM

BOOK 3847

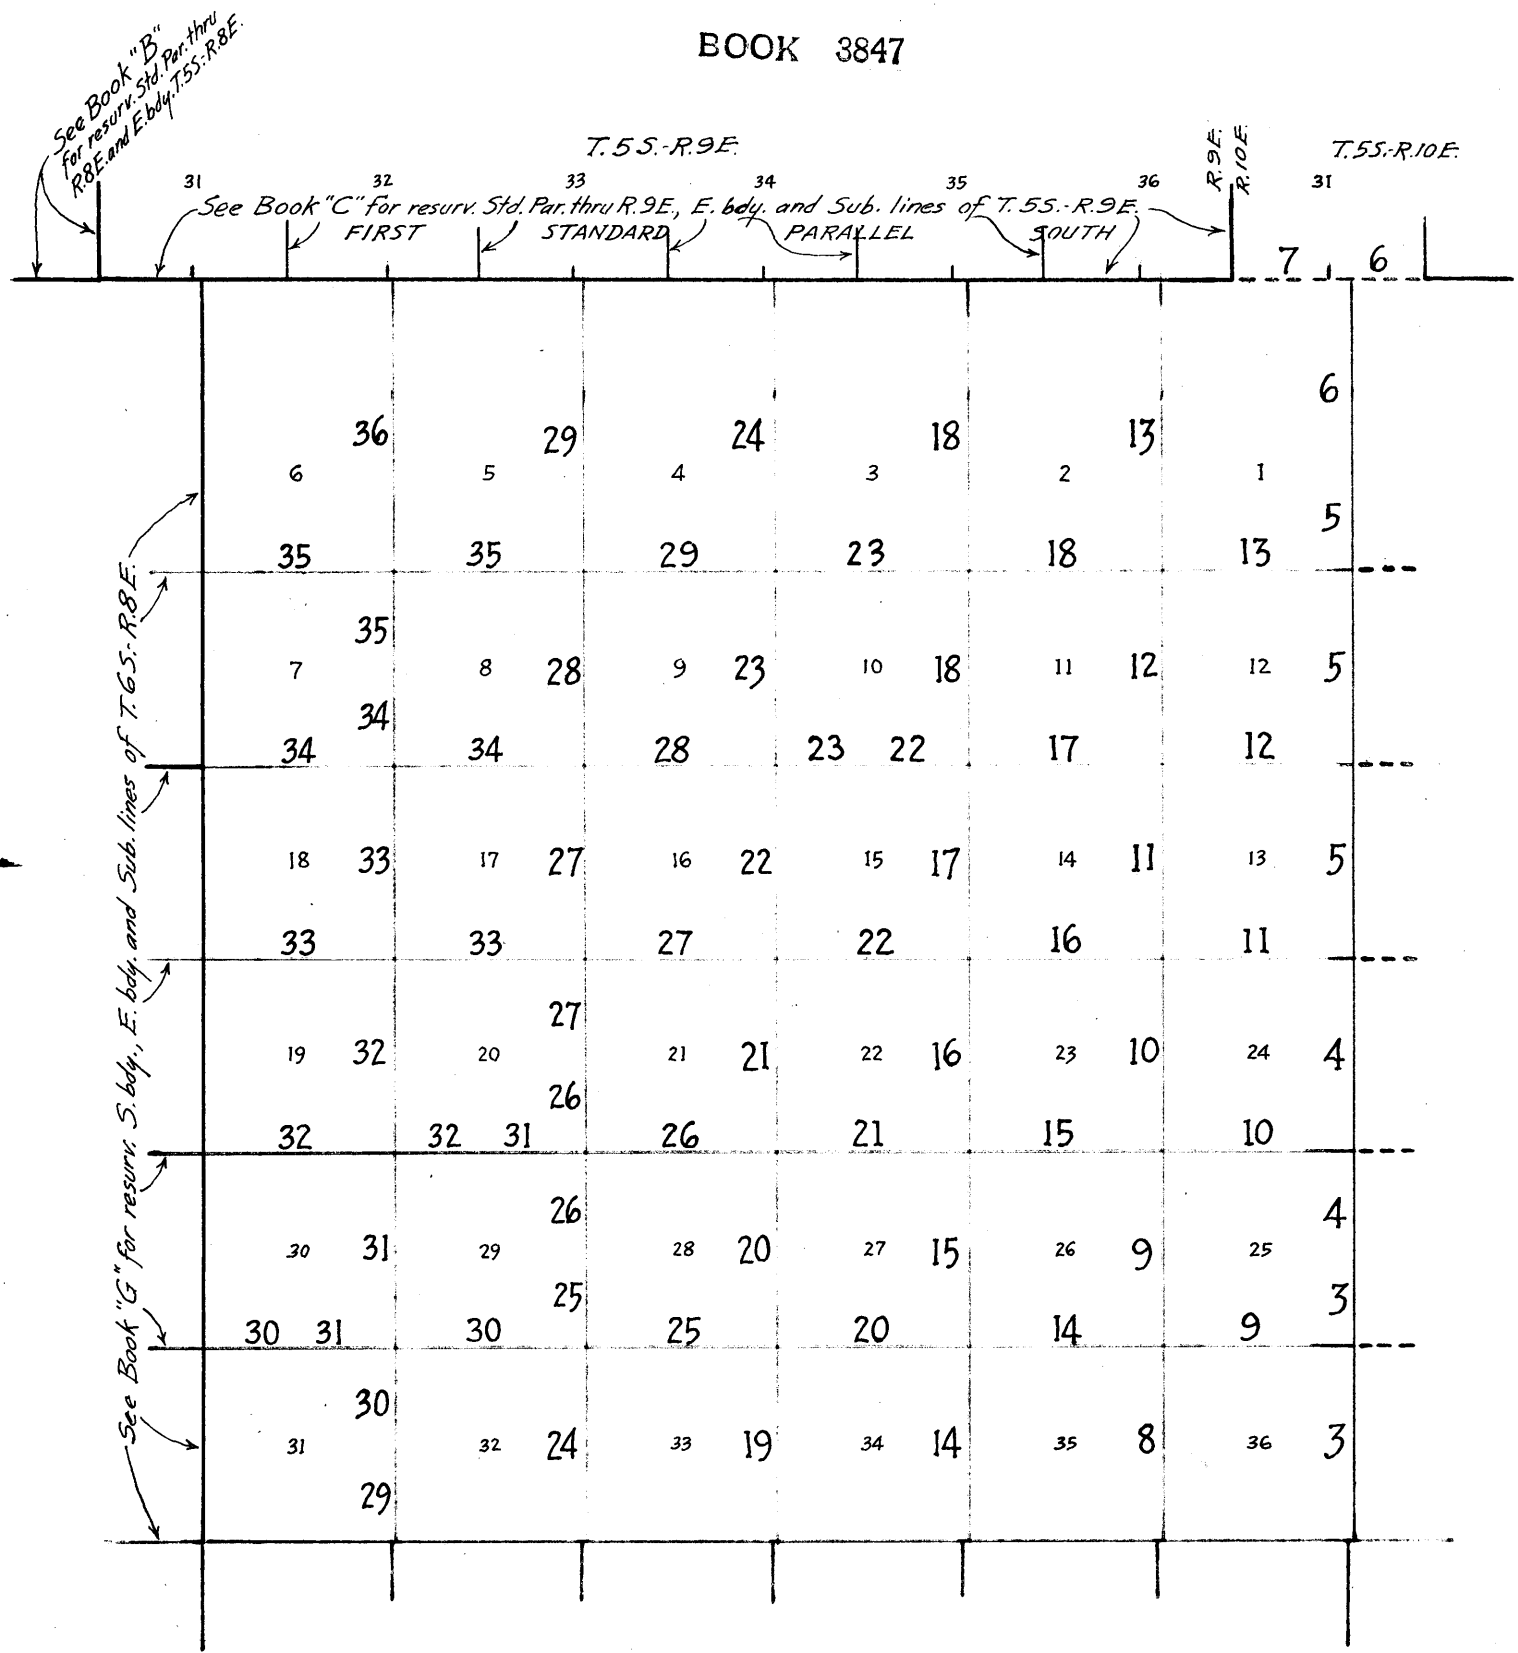

Resurveyed by Dupree R. Averill, U.S. Surveyor, under instructions Group 150.

Resurveyed by Roger F. Wilson, U.S. Transitman, under instructions Group 150.

Resurveyed by Otis O. Gould, U.S. Transitman, under instructions Group 150.
Retraced " " " " " " " " " " " "

Accepted surveys, retracements and resurveys.

Unsurveyed.

chains

The resurveys herein described were commenced April 24, 1928, and executed by Otis O. Gould, U.S. Transitman, using Buff solar transit No. 10125. This instrument is equipped with Smith solar attachment and otherwise conforms to the standard requirements of the General Land Office. All azimuth determinations are accomplished with the solar attachment.

Preliminary Field Test

April 22, 1928: At the station (described on Page 1 of book "A") near the center of sec. 29, T.6 S., R.6 E., G. and S.R. base and meridian, Arizona, Latitude $32^{\circ}52\frac{1}{2}'$ N. and longitude $111^{\circ}45'$ W., and on the meridian established by Polaris observation of January 28, 1928; examine the adjustments of the instrument and find no errors; then to test the workings of the solar apparatus, proceed as follows:

At 9h 0m a.m. app.t., set off $32^{\circ}52\frac{1}{2}'$ on the latitude arc, $12^{\circ}17'$ N. on the declination arc and determine a meridian with the solar, which agrees with the true meridian.

At app. noon, with latitude arc unchanged, observe the sun on the meridian; the resultant reading of the declination arc is $12^{\circ}19'$ N., which agrees with the computed declination of the sun.

At 3h 0m p.m. app.t., with latitude arc unchanged, set off $12^{\circ}22'$ N. on the declination arc and determine a meridian with the solar, which agrees with the true meridian.

As all of the observations taken during the usual hours of solar work agree within 1' of the true meridian, conclude that the instrument is in proper adjustment.

All measurements are made with a Lallie steel tape 5 chs. in length, compared with a Lufkin standard and found correct.

The measurements are taken on the slope, the vertical angles read with a clinometer and the slope measurements properly reduced to true horizontal distance, for final entry in the field notes.

Resurvey of the East Boundary
of
T. 6 S., R. 9 E.

chains

The East boundary of this township, except the E. bdy. of sec. 36, was surveyed in 1891, by D. Drummond, U.S.D.S.

In 1913, J.B. Wright, U.S.S., surveyed the E. bdy. of sec. 36 and established the cor. of Ts.6 S., Rs.9 and 10 E.

There is no retracement or resurvey of the east boundary of this township, of record.

The following notes describe a dependent resurvey of the east boundary of T.6 S., R.9 E., preserving the alignment between orig. cors. and reestablishing missing cors. by direct proportion.

From the cor. of Ts. 6 S., Rs.9 and 10 E., hereinafter described,

North, on a random line, bet. secs. 31 and 36.

40.05 Intersect the $\frac{1}{4}$ sec. cor.

80.44 Fall 7 lks. W. of the cor. of secs. 25, 30, 31 and 36.

Thence, North, on a random line, bet. secs. 25 and 30.

40.00 Find no trace of $\frac{1}{4}$ sec. cor. Set temp. cor.

80.24 Fall 5 lks. E. of the cor. of secs. 19, 24, 25 and 30.

Thence, North, on a random line, bet. secs. 19 and 24 ($S\frac{1}{2}$)

40.06 Fall 7 lks. E. of the $\frac{1}{4}$ sec. cor.

Thence, North, on a random line, bet. secs. 19 & 24 ($N\frac{1}{2}$), 13 & 18, and 7 & 12 ($S\frac{1}{2}$), setting temp. cors. at intervals of 40.00 chs. and making diligent search for orig. cors. at such points.

160.24 Intersect the $\frac{1}{4}$ sec. cor. secs. 7 and 12.

Thence, North, on a random line, bet. secs. 7 and 12 ($N\frac{1}{2}$) and 1 and 6.

40.00 Find no trace of cor. of secs. 1, 6, 7 and 12. Set temp. cor.

80.00 Find no trace of $\frac{1}{4}$ sec. cor. Set temp. cor.

157.81 Intersect the 1st. stand. par. S., at 29.37 chs. $S. 89^{\circ} 32' W.$ of the stand. cor. of secs. 31 and 32, T.5 S., R.10 E., hereinafter described,


158.02 Intersect the orig. closing cor. of Ts. 6 S., Rs. 9 and 10 E., hereinafter described.

Resurvey of the East Boundary
of
T. 6 S., R. 9 E.

BOOK 3847

chains


The cor. of Ts.6 S., Rs.9 and 10 E. is an iron post, 3 ins. diam., set in a mound of stone 4 ft. base and 2 ft. high, with brass cap marked

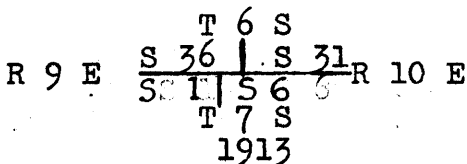

21.45 Thence, North, on true line, bet. secs. 31 and 36. (S $\frac{1}{2}$)
Over mountainous land, thru scattering undergrowth.
Ascend 400 ft. on S. slope.

Ridge, bears NW. and SE.; descend 420 ft. on N. slope.
S. end of fence, extending N.

40.05 The $\frac{1}{4}$ sec. cor., which is an iron post 1 in. diam., set in a mound of stone 4 ft. base 2 $\frac{1}{2}$ ft. high, with brass cap marked



Cor. is under fence, extending N. and S.

Thence, N.0°06'E. on true line bet. secs. 31 and 36. (N $\frac{1}{2}$)
Over mountainous land, thru scattering undergrowth, timber.


8.20 Descend 85 ft. over NE. slope.

17.40 Wash, 25 lks. wide, course NW.; ascend 85 ft. on SW. slope.

21.40 Small spur, slopes W.; descend 108 ft.

40.39 The cor. of secs. 25,30,31 and 36, which is a granite stone 10x8x6 ins. above ground, marked with a cross(X) on top, 1 notch on S. and 5 notches on N. side, and witnessed by a mound of stone 3 ft. base, 2 ft. high, to W. of cor. In place of stone, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins.in ground for cor. of secs. 25,30,31 and 36, with brass cap marked



witnessed by

Orig. mound of stone 3 ft. base 2 ft. high, W. of cor.
Cor. is under fence extending N. and S.

Land: Mountainous.
Soil: Rocky and gravelly loam, 3d rate.
Timber: Paloverde, and ironwood.
Undergrowth: Greasewood, mesquite and sage.

N.0°02'W. on true line bet. secs. 25 and 30.
Over rolling land, thru scattering timber and brush.


14.85 Wash, 15 lks. wide, course NW.

20.55 Wash, 40 lks. wide, course SW.; continue over level land.

27.25 Wash, 30 lks. wide, course SW.

39.75 Wash, 15 lks. wide, course west.

40.12 Set an iron post 3 ft. long 1 in. diam., 33 ins.in ground for $\frac{1}{4}$ sec. cor., with brass cap marked



Resurvey of The West Boundary
of

T. 6 S., R. 9 E.

chains

Deposit a marked (X) stone alongside post, at base.
Cor. is under fence extending N. and S.

75.00 Wash, 15 lks. wide, course NW.

80.24 The cor. of secs. 19, 24, 25 and 30, which is a mesquite stake 4 ins. square, 16 ins. above ground, scribe marks not legible. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 19, 24, 25 and 30, with brass cap marked

T 6 S			
R 9 E	R 10 E		
S 24	S 19		
S 25	S 30		
1928			

deposit a marked (X) stone alongside post, at base.
Cor. is under a fence extending N. and S.

Land: Level.

Soil: Clayloam, gravelly, 2d rate.

Timber: Paloverde and ironwood.

Undergrowth: Mesquite, greasewood and sage.

N.0°06'W. on true line bet. secs. 19 and 24. ($S\frac{1}{2}$)
Over level land, thru scattering undergrowth, timber.
Along fence line, extends N. and S.

35.90 Wash, 150 lks. wide, course SW.

40.06 The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square, 14 ins. above ground, scribe marks not legible. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	
S 24	S 19
1928	

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.
Cor. is under fence line extending N. and S.

Thence, North, on true line, bet. secs. 19 and 24. ($N\frac{1}{2}$)
Over level land, thru scattering timber and undergrowth.

0.25 Wash, 25 lks. wide, course west.

2.64 Wash, 25 lks. wide, course SW.

38.52 Fence extends E. and W.; cor. of fences extending W. and S. bears E., 67 lks. dist.

40.06 Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 13, 18, 19 and 24, with brass cap marked

T 6 S			
R 9 E	R 10 E		
S 13	S 18		
S 24	S 19		
1928			

Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: Paloverde and ironwood.

Undergrowth: Mesquite, greasewood and sage.

Resurvey of the East Boundary
of
T. 6 S., R. 9 E.

BOOK 3247

chains North, on true line, bet. secs. 13 and 18.
Over level land, thru scattering undergrowth.


40.06 Set an iron post, 3 ft. long, 1 in. in diam., 33 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
 S 13 | S 18
 1928

raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

61.20 Wash, 15 lks. wide, course NW.

80.12 Set an iron post, 3 ft. long, 2 ins. in diam., 33 ins. in ground, for cor. of secs. 7, 12, 13 and 18, with brass cap marked




raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, level.
Soil, clay loam, 1st and 2nd rate.
Timber, none.
Undergrowth, scrub mesquite, sagebrush, and greasewood.

North, on true line, bet. secs. 7 and 12. (S. $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

40.06 Intersect original $\frac{1}{4}$ sec. cor., which is a mesquite post, 4 ins. square, projecting 14 ins. above ground, illegibly marked, and with no accessories.
Reconstruct this cor. monument in same place as follows: remove the old post, set an iron post, 3 ft. long, 1 in. in diam., 33 ins. in ground, and deposit the old post at base of iron post, for $\frac{1}{4}$ sec. cor., with brass cap marked




raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Thence,
North, on true line, bet. secs. 7 and 12 (N. $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

2.90 Wash, 15 lks. wide, course NW.

39.55 Set an iron post, 3 ft. long, 2 ins. in diam., 33 ins. in ground, for cor. of secs. 1, 6, 7 and 12, with brass cap marked



raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, level.
Soil, clay loam, 1st and 2nd rate.
Timber, none.
Undergrowth, scrub mesquite, sagebrush and greasewood.

North, on true line, bet. secs. 1 and 6.
Over level land, thru scattering undergrowth.

39.55 Set an iron post, 3 ft. long, 1 in. in diam., 33 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

Resurvey of East Bdy. of T. 6 S., R. 9 E.
and
Retracement of 1st Standard Parallel South
thru Part of Range 10 East

chains

1/4
S 1 | S 6
1928

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

88.60 Wash, 15 lks. wide, course W.
106.10 Old winding road, bears NW. and SE.

118.26 Intersect the 1st Standard Parallel South at a point
29.37 chs. S. 89° 32' W. from std. cor. of secs. 31 and
32, T. 5 S., R. 10 E., hereinafter described.
The closing cor. of Ts. 6 S., Rs. 9 and 10 E., reconstructed
by W.H. Elliott, U.S.S. in 1911, which is a charred
mesquite post, 5 ins. square, projecting 14 ins. above
ground, illegibly marked, and without accessories, is
21 lks N. of this point of intersection.
Remove the old post, and at point of intersection, set
an iron post, 3 ft. long, 3 ins. in diam., 35 ins. in
ground, and deposit old C.C. post at base of iron
post, for closing cor. of Ts. 6 S., Rs. 9 and 10 E.,
with brass cap marked

T 5 S R 10 E
S 31
S 1 | S 6
R 9 E | R 10 E
T 6 S
C C
1928

raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

Land, level.
Soil, clay loam, 1st and 2nd rate.
Timber, none.
Undergrowth, scrub mesquite, sagebrush and greasewood.

RETRACEMENT of 1st Standard Parallel South, thru Part of R. 10 E.

The 1st Standard Parallel South was surveyed thru
Range 10 East by S.W. Foreman, U.S.D.S. in 1871, resurveyed
by J.B. McLaughlin, U.S.D.S. in 1884, resurveyed by
W.H. Elliott, U.S.S. in 1911, and retraced S. of secs. 33,
34 and 35, T. 5 S., R. 10 E., by S.E. Blout, U.S.C.E. in 1922.
No other retracement or resurvey of the Parallel in
Range 10 East is of record.
The following notes describe a retracement of the
S. bdy. of sec. 31, T. 5 S., R. 10 E.

The std. cor. of secs. 31 and 32 is a charred mesquite
post, 4 ins. square, projecting 20 ins. above ground,
illegibly marked, and with no accessories.
Reconstruct this cor. monument in same place as follows:
remove the old wood post, set an iron post, 3 ft.
long, 2 ins. in diam., 35 ins. in ground, and deposit old
wood post at base of iron post, for standard cor. of secs.
31 and 32, with brass cap marked

S C
T 5 S | R 10 E
S 31 | S 32
1928

raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
Thence,
S. 89° 5' W., on random line, on S. bdy. of sec. 31.

Retracement of 1st Standard Parallel South
thru Part of Range 10 East

BOOK 3847

chains
29.37 Over level land, thru scattering undergrowth.
A point 44 lks. S. of the closing cor. of Ts. 6 S., Rs. 9 and 10 E., reconstructed by W.H. Elliott, U.S.S. in 1911, which is a charred mesquite post, 5 ins. square, projecting 14 ins. above ground, illegibly marked, and without accessories.
Remove this post, and deposit same at base of reestablished closing cor., as hereinbefore described.
Continue line and measurement

40.00 Diligent search in this vicinity fails to reveal any trace of the std. $\frac{1}{4}$ sec. cor. of sec. 31, reconstructed by W.H. Elliott U.S.S. in 1911.

43.00 Old road, bears N. and SE.

80.32 Fall 63 lks. S. of the std. cor. of Ts. 5 S., Rs. 9 and 10 E., described in Book "C" of this group.
The true course and dist. of S. bdy. of secs. 31 are therefore, N. 89° 32' E., 80.32 chs., and the closing cor. of Ts. 6 S., Rs. 9 and 10 E. described above, is 21 lks. N. of point of intersection of the range line with the std. parallel.

Land, level.
Soil, clay loam, 1st and 2nd rate.
Timber, none.
Undergrowth, scrub mesquite, sagebrush and greasewood.

Boundaries of T. 6 S., R. 9 E.
Latitudes, departures and Closing Errors.

Line designated	True Course	Dist.	Latitudes		Departures	
			N.	S.	E.	W.
South boundary	N. 89° 36' W.	81.64	.57			81.64
	N. 89° 20' W.	40.08	.47			40.08
	N. 89° 30' W.	40.09	.35			40.09
	N. 89° 23' W.	160.28	1.72			160.28
	N. 89° 25' W.	155.27	1.58			155.27
West boundary	North	80.00	80.00			
	N. 0° 7' E.	119.73	119.73		.24	
	N. 0° 25' E.	119.81	119.81		.87	
	N. 0° 3' E.	80.02	80.02		.07	
	North	40.00	40.00			
North boundary (1st Std. Par. S.)	S. 89° 23' E.	424.70	4.57	4.57	424.70	
	N. 89° 32' E.	50.95	.42		50.95	
East boundary	South	318.05		318.05		
	S. 0° 6' E.	40.06		40.06	.07	
	S. 0° 2' E.	80.24		80.24	.05	
	S. 0° 6' W.	40.39		40.39		.07
	South	40.05		40.05		
Convergency					.47	
Totals			523.59	523.36	477.51	477.43
			523.36		477.43	
Error in latitude			0.23			
Error in departure					0.08	

Resurvey of the Subdivisions
of
T. 6 S., R. 9 E.

chains

The subdivision lines of Township 6 South, Range 9 East were surveyed in 1891 by D. Drummond, U.S.D.S.

No retracement or resurvey of any part of the subdivision lines of this township is of record.

The following notes describe a dependent resurvey of all of the subdivision lines, reconstructing all of the existing original corners, and reestablishing all missing corners by proportional measurement between the existing corners.

The cor. of secs. 35 and 36, on the S. bdy. of the Tp., is a granite stone, 12 x 8 x 8 ins. above ground, firmly set, marked with 1 notch on E. face and 5 notches on W. face, and witnessed by a mound of stone N. of cor. No bearing trees.

Thence

N.1°53'E., on true line, bet. secs. 35 and 36 (S. $\frac{1}{4}$)
Over rolling land, thru very scattering timber and scattering undergrowth.

8.70

Wash, 35 lks. wide, course W.
Ascend 90 ft. over S. slope.

18.90

Spur, slopes W.
Descend 215 ft. over N. slope to

29.00

Thence over W. slope.

40.07

Intersect the original $\frac{1}{4}$ sec. cor., which is a granite stone, 8 x 5 x 5 ins. above ground, marked $\frac{1}{4}$ S on W. face, firmly set, and witnessed by a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. No bearing trees.

Reconstruct this cor. monument as follows:

alongside old stone, set an iron post, 3 ft. long, 1 in. in diam., 33 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 35 | S 36

1928

Thence,

N.0°20'E., on true line, bet. secs. 35 and 36 (N. $\frac{1}{4}$)

Over nearly level land, draining W., thru very scattering timber, and scattering undergrowth.

17.50

Wash, 35 lks. wide, course W.

40.04

Intersect the original cor. of secs. 25, 26, 35 and 36, which is a granite stone, 14 x 8 x 8 ins. above ground, firmly set, marked with 1 notch on each of E. and S. faces, and witnessed by a mound of stone 2 $\frac{1}{2}$ ft. base, 2 ft. high, W. of cor. No bearing trees.

Reconstruct this cor. monument as follows:

alongside old stone, set an iron post, 3 ft. long, 2 ins. in diam., 33 ins. in ground, for cor. of secs. 25, 26, 35 and 36, with brass cap marked

T 6 S, R 9 E

S 26 | S 25

S 35 | S 36

1928

Land, rolling and nearly level. Soil, rocky, clay loam, Timber, paloverde & ironwood. 2nd and 3rd rate. Undergrowth, scrub mesquite, sagebrush, and greasewood.

Resurvey of the Subdivisions
of
T. 6 S., R. 9 E.

BOOK 3847

chains

From the cor. of secs. 25, 30, 31 and 36, on E. bdy. of Tp.,
hereinbefore described.

N.89°44'W. on true line bet. secs. 25 and 36. (E½)
Over rolling land, thru scattering undergrowth.

3.50 Wash, 20 lks. wide, course NW.

40.00 The ¼ sec. cor., which is a granite stone 12x9x¼ ins.
above ground. No marks visible. In place of stone,
which is marked with a cross (X) and deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 10 ins. in ground
to bedrock, in a mound of stone, for ¼ sec. cor., with
brass cap marked

1 S 25
¼ S 36

1928

Witnessed by orig. mound of stone 3 ft. base 1½ ft. high,
N. of cor.

Thence, N.89°42'W. on true line bet. secs. 25 and 36. (W½)
Over nearly level land, thru scattering timber and brush.

40.09 The cor. of secs. 25, 26, 35 and 36.

Land: Rolling and nearly level.
Soil: Clayloam, 1st and 2d rate.
Timber: Wood and paloverde.
Undergrowth: Mesquite, sage and greasewood.

N.0°01'W. on true line bet. secs. 25 and 26. (S½)
Over nearly level land, thru scattering timber and brush.

9.00 Wash, 15 lks. wide, course SW.

14.20 Wash, 25 lks. wide, course SW.

29.80 Wash, 20 lks. wide, course SW.

40.32 The ¼ sec. cor., which is a mesquite stake 4 ins. square,
18 ins. long, lying on ground beside old mound of earth.
No scribe marks legible on stake. In place of stake,
which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for ¼ sec. cor., with brass cap marked

¼
S 26 | S 25

1928

Deposit a marked (X) stone alongside post, at base.

Thence, N.0°05'W. on true line bet. secs. 25 and 26. (N½)
Over nearly level land, thru scattering timber and brush.

7.00 Wash, 30 lks. wide, course NW.

36.70 Wash, 60 lks. wide, course SW.

39.20 Wash, 40 lks. wide, course SW.

40.17 Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 23, 24, 25 and 26, with brass cap marked

T 6 S R 9 E
S 23 | S 24
S 26 | S 25

1928

Deposit a marked (X) stone alongside cor., at base.

Resurvey of the Subdivisions
of
T. 6 S., R. 9 E.

chains

Land: Nearly level.
Soil: Clayloam, rocky, 2d and 3d rate.
Timber: Paloverde and ironwood.
Undergrowth: Mesquite, sage and greasewood.

From the cor. of secs. 19, 24, 25 and 30, on E. bdy. of Tp.,
hereinbefore described.

N. 89° 26' W. on true line bet. secs. 24 and 25. (E $\frac{1}{2}$)
Over level land, thru scattering timber and brush.

10.70 Wash, 25 lks. wide, course NW.

36.70 Wash, 20 lks. wide, course NW.

39.83 The $\frac{1}{4}$ sec. cor., which is the remains of a mesquite stake
buried in small mound of earth. In place of stake,
which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4} \begin{array}{c} S 24 \\ S 25 \end{array}$$

1928

Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high N. of cor.

Thence, N. 89° 45' W. on true line bet. secs. 24 and 25. (W $\frac{1}{2}$)
Over nearly level land, thru scattering timber and brush.

35.20 Wash, 15 lks. wide, course S. 1 ch., thence SW.

38.50 Wash, 50 lks. wide, course SW.

40.34 The cor. of secs. 23, 24, 25 and 26.

Land: Level and nearly level.
Soil: Clayloam, gravelly and rocky, 2d rate.
Timber: Paloverde and ironwood.
Undergrowth: Mesquite, greasewood and sage.

N. 0° 23' W. on true line bet. secs. 23 and 24.
Over nearly level land, thru scattering timber and brush.

1.25 Old fence line, extends NE. and SW. No wire on fence posts.

11.05 Wash, 120 lks. wide, course W., 3 chs., thence SW.

16.85 Wash, 40 lks. wide, course NW.

40.17 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4}$$

$$S 23 | S 24$$

1928

Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

78.63 Fence, extends E. and W.

80.34 The cor. of secs. 13, 14, 23 and 24, which is a mesquite
stake 4 ins. square, 18 ins. above ground, scribe marks
not legible. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 13, 14, 23 and 24, with brass cap marked

$$T 6 S R 9 E$$

$$\begin{array}{c} S 14 | S 13 \\ S 23 | S 24 \end{array}$$

1928

Resurvey of the Subdivisions
of
T. 6 S., R. 9 E.

BOOK 3847

chains

Raise a mound of stone 3 ft. base 2 ft. high, W. of cor.

Land: Nearly level.
Soil: Clayloam, 1st and 2d rate.
Timber: ~~Fal~~everde and ironwood.
Undergrowth: Mesquite, sage and greasewood.

From the cor. of secs. 13, 18, 19 and 24, on E. bdy. of Tp.,
hereinbefore described.
N.89°37'W. on true line bet. secs. 13 and 24. (E $\frac{1}{2}$)
Over level land, thru scattering timber and brush.

40.45

The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square,
18 ins. above ground, scribe marks not legible. In
place of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 13
S 24
1928

Raise a mound of stone 3 ft. base 2 ft. high N. of cor.

Thence, N.89°19'W. on true line bet. secs. 13 and 24. (W $\frac{1}{2}$)
Over level land, thru scattering timber and brush.

40.16

The cor. of secs. 13, 14, 23 and 24.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: ~~Fal~~everde and ironwood.
Undergrowth: Mesquite, sage and greasewood.

N.0°19'E. on true line bet. secs. 13 and 14. (S $\frac{1}{2}$)
Over level land, thru scattering timber and brush.

40.00

The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square,
3 ft. long, lying on ground, scribe marks not legible.
In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 14 | S 13
1928

Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Thence, N.0°05'W. on true line bet. secs. 13 and 14. (N $\frac{1}{2}$)
Over level land, thru scattering timber and brush.

32.20

Wash, 20 lks. wide, course SW.

40.12

The cor. of secs. 11, 12, 13 and 14, which is a mesquite
stake 4 ins. square, 2 ft. long, lying on ground on old
mound of earth, scribe marks not legible. In place of
stake, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 11, 12, 13 and 14, with brass cap marked

T 6 S R 9 E
S 11 | S 12
S 14 | S 13
1928

Resurvey of the Subdivisions
of

T. 6 S., R. 9 E.

chains

Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: Paloverde and ironwood.

Undergrowth: Mesquite, greasewood and sage.

From the cor. of secs. 7, 12, 13 and 18, on E. bdy. of Tp.,
hereinbefore described.

N. 89° 24' W. on true line bet. secs. 12 and 13.

Over level land, thru scattering timber and undergrowth.

40.22 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4} \begin{array}{l} S 12 \\ S 13 \end{array}$$

1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.

80.44 The cor. of secs. 11, 12, 13 and 14.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: Paloverde and ironwood.

Undergrowth: Mesquite, sage and greasewood.

N. 0° 02' W. on true line bet. secs. 11 and 12. ($S\frac{1}{2}$)

Over level land, thru scattering timber and brush.

40.26 The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square,
18 ins. long, lying on ground on old mound of earth,
scribe marks not legible. In place of stake, which is
deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4}$$

$$S 11 | S 12$$

1928

Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Thence, N. 0° 06' E. on true line bet. secs. 11 and 12. ($N\frac{1}{2}$)

Over level land, thru scattering timber and brush.

40.07 The cor. of secs. 1, 2, 11 and 12, which is the remains of
a mesquite stake buried in small mound of earth. In
place of stake, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 1, 2, 11 and 12, with brass cap marked

$$T 6 S R 9 E$$

$$\frac{S 2 | S 1}{S 11 | S 12}$$

1928

Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: Paloverde and ironwood.

Undergrowth: Mesquite, sage and greasewood.

Resurvey of the Subdivisions
of
T. 6 S. R. 9 E.

BOOK 880

chains	<p>From the cor. of secs. 1,6,7 and 12, on E. bdy. of Tp., hereinbefore described. N.88°56'W. on true line bet. secs. 1 and 12. Over level land, thru scattering timber and brush.</p>
40.21	<p>Set an iron post 3 ft. long 1 in. diam., 33 ins.in ground for $\frac{1}{4}$ sec. cor., with brass cap marked</p> $\begin{array}{c} \frac{1}{4} \text{ S } 1 \\ \hline \frac{1}{4} \text{ S } 12 \\ 1928 \end{array}$ <p>Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.</p>
52.20	Wash, 30 lks. wide, course NW.
61.50	Dim winding road, bears NW. and SE.
80.42	<p>The cor. of secs. 1,2,11 and 12.</p> <p>Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: Paloverde and ironwood. Undergrowth: Mesquite, sage and greasewood and grass.</p> <hr style="border-top: 1px dashed black;"/> <p>N.0°05'W. on true line bet. secs. 1 and 2. ($S\frac{1}{2}$) Over level land, thru scattering undergrowth.</p>
24.40	Dim winding road, bears NW. and SE.
37.50	Wash, 25 lks. wide, course NW.
40.07	<p>The $\frac{1}{4}$ sec. cor., which is the remains of a mesquite stake, buried in ground. Alongside is a stone 10x8x3 ins. above ground, marked with a cross (X). In place of stake and stone, which are deposited alongside,</p> <p>Set an iron post 3 ft. long 1 in. diam., 33 ins.in ground for $\frac{1}{4}$ sec. cor., with brass cap marked</p> $\begin{array}{c} \frac{1}{4} \\ \hline \text{S } 2 \mid \text{S } 1 \\ 1928 \end{array}$ <p>Raise a mound of stone 3 ft. base 2 ft. high W. of cor.</p> <p>Thence, N.0°16'E. on true line bet. secs. 1 and 2. ($N\frac{1}{2}$) Over level land, thru scattering undergrowth.</p>
17.00	Wash, 15 lks. wide, course NW.
31.00	Wash, 15 lks. wide, course NW.
76.68	<p>Intersect the 1st stand. Par. S. at a point 9.74 chs., S.89°23'E. of the stand. $\frac{1}{4}$ sec. cor. sec. 36, described in book "C". At point of intersection,</p> <p>Set an iron post 3 ft. long 2 ins. diam., 35 ins.in ground for closing cor. of secs. 1 and 2, with brass cap marked</p> $\begin{array}{c} \text{T } 5 \text{ S } \text{R } 9 \text{ E} \\ \hline \text{S } 36 \\ \hline \text{S } 2 \mid \text{S } 1 \\ \text{T } 6 \text{ S } \text{R } 9 \text{ E} \\ \text{C } \text{C} \\ 1928 \end{array}$ <p>Raise a mound of stone 3 ft. base 2 ft. high, S. of cor.</p> <p>Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: Paloverde and ironwood. Undergrowth: Mesquite, greasewood, sage and grass.</p>

Resurvey of the Subdivisions
of
T. 6 S., R. 9 E.

chains	
	From the cor. of secs. 34 and 35, only, on S. bdy. of Tp., which is an iron post 3 ins. diam., 8 ins. above ground, with brass cap marked
	$\begin{array}{c} T\ 6\ S \\ S\ 34\ S\ 35 \\ R\ 9\ E\ S\ 3\ S\ 2 \\ T\ 7\ S \\ 1913 \end{array}$
	N.0°18'E. on true line bet. secs. 34 and 35. Over nearly level land, thru scattering undergrowth.
21.00	Old winding road, bears NW. and SE.
25.80	Wash, 30 lks. wide, course west.
34.90	Wash, 10 lks. wide, course west.
39.80	Wash, 10 lks. wide, course NW.
40.12	Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\begin{array}{c} \frac{1}{4} \\ S\ 34\ S\ 35 \\ 1928 \end{array}$
	Raise a mound of stone 3 ft. base 2 ft. high W. of cor.
45.50	Wash, 20 lks. wide, course SW.
56.60	Wash, 20 lks. wide, course SW.
75.80	Wash, 20 lks. wide, course SW.
80.00	Cor. of fences extending N. and W. bears E., 27 lks. dist.
80.24	Set an iron post 3 ft. long, 2 ins. diam., 33 ins. in ground for cor. of secs. 26, 27, 34 and 35, with brass cap marked
	$\begin{array}{c} T\ 6\ S\ R\ 9\ E \\ S\ 27\ S\ 26 \\ S\ 34\ S\ 35 \\ 1928 \end{array}$
	Raise a mound of stone 3 ft. base 2 ft. high W. of cor.
	Land: . . . Nearly level. Soil: Clayloam, 1st and 2d rate. Timber: Paloverde and ironwood. Undergrowth: Mesquite, sage and greasewood.

	From the cor. of secs. 25, 26, 35 and 36. N.89°20'W. on true line bet. sec. 26 and 35. (E $\frac{1}{2}$) Over nearly level land, thru scattering undergrowth.
16.00	Wash, 15 lks. wide, course SW.
40.99	The $\frac{1}{4}$ sec. cor., which is a mesquite stake 3 ins. square 18 ins. above ground, scribe marks not legible. In place of stake, which is deposited alongside,
	Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\begin{array}{c} \frac{1}{4}\ S\ 26 \\ \frac{1}{4}\ S\ 35 \\ 1928 \end{array}$
	Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high N. of cor.
	Thence, N.89°16'W. on true line bet. secs. 26 and 35. (W $\frac{1}{2}$) Over level land, thru scattering timber and undergrowth.
33.00	Wash, 30 lks. wide, course SW.
40.24	The cor. of secs. 26, 27, 34 and 35.

Resurvey of the Subdivisions
of
T. 6 S., R. 9 E.

BOOK 3847

chains

Land: Level and nearly level.
Soil: Clayloam, 1st and 2d rate.
Timber: Paloverde and ironwood.
Undergrowth: Mesquite, sage and greasewood.

N.0°04'E. on true line bet. secs. 26 and 27.
Over nearly level land, thru scattering timber and brush.

35.72 Wash, 1 ch. wide, course W.

40.12 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 27 | S 26
1928

Raise a mound of stone 3 ft. base 2 ft. high W. of cor.
Fence extending N. and S. bears E., 68 lks. dist.

41.10 Wash, 30 lks. wide, course W.

80.24 Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 22, 23, 26 and 27, with brass cap marked

T 6 S R 9 E
S 22 | S 23
S 27 | S 26
1928

Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Land: Nearly level.
Soil: Clayloam, 1st and 2d rate.
Timber: Paloverde, Ironwood.
Undergrowth: Mesquite, sage and greasewood.

From the cor. of secs. 23, 24, 25 and 26.
N.89°30'W. on true line bet. secs. 23 and 26. (E $\frac{1}{2}$)
Over nearly level land, thru scattering undergrowth, and timber.

10.60 Wash, 30 lks. wide, course SW.

13.70 Wash, 200 lks. wide, course SW.

40.46 The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square,
3 ft. long, lying on ground on a small mound of earth.
Scribe marks not legible. In place of stake, which is
deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 23
 $\frac{1}{4}$ S 26
1928

Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high N. of cor.

Thence, N.89°33'W. on true line bet. secs. 23 and 26. (W $\frac{1}{2}$)
Over nearly level land, thru scattering timber and brush.

39.46 Fence extends N. and S.

40.52 The cor. of secs. 22, 23, 26 and 27.

Land: Nearly level.
Soil: Clayloam, 1st and 2d rate.
Timber: Paloverde and ironwood.
Undergrowth: Mesquite, sage and greasewood.

Resurvey of the Subdivisions
of

T. 6 S. R. 9 E.

chains	
	N.0°45'W. on true line bet. secs. 22 and 23. (S $\frac{1}{2}$) Over nearly level land, thru scattering timber and brush.
4.00	Fence, extends E. and W. Cor. of fences extending N., S. and W. bears E., 110 lks. dist.
16.00	Wash, 20 lks. wide, course SW.
26.80	Wash, 10 lks. wide, course NW.
40.12	The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square, 12 ins. long, lying on ground besides buried part of stake, in small mound of earth. Scribe marks not legible. In place of stake, which is deposited alongside, Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked $\begin{array}{c} \frac{1}{4} \\ \hline S\ 22\ \ S\ 23 \\ \hline 1928 \end{array}$ Raise a mound of stone 3 ft. base 2 ft. high W. of cor. Fence extending N. and S. bears E., 150 lks. dist. Thence, N.0°29'E. on true line bet. secs. 22 and 23. (N $\frac{1}{2}$) Over nearly level land, thru scattering timber and brush.
32.70	Wash, 20 lks. wide, course W.
38.74	Cor. of fences extending E. and S. bears E., 196 lks. dist.
39.84	Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 14, 15, 22 and 23, with brass cap marked $\begin{array}{c} T\ 6\ S\ R\ 9\ E \\ \hline S\ 15\ \ S\ 14 \\ \hline S\ 22\ \ S\ 23 \\ \hline 1928 \end{array}$ Raise a mound of stone 3 ft. base 2 ft. high W. of cor. Land: Nearly level. Soil: Clayloam, 1st and 2d rate. Timber: Paloverde and ironwood. Undergrowth: Mesquite, greasewood and sage.
40.30	From the cor. of secs. 13, 14, 23 and 24. N.89°36'W. on true line bet. secs. 14 and 23. (E $\frac{1}{2}$) Over nearly level land, thru scattering timber and brush. The $\frac{1}{4}$ sec. cor., which is the remains of a mesquite stake, 3 ins. square, 14 ins. above ground, scribe marks not legible. In place of stake, which is deposited alongside, Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked $\begin{array}{c} \frac{1}{4} \ S\ 14 \\ \hline \frac{1}{4} \ S\ 23 \\ \hline 1928 \end{array}$ Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high N. of cor. Fence extending E. and W. bears S., 140 lks. dist. Thence, S.89°57'W. on true line bet. secs. 14 and 23. (W $\frac{1}{2}$) Over nearly level land, thru scattering timber and brush.
40.38	The cor. of secs. 14, 15, 22 and 23. Land: Nearly Level. Soil: Clayloam, 1st and 2d rate. Timber: Paloverde and ironwood. Undergrowth: Mesquite, sage and greasewood.


Resurvey of the Subdivisions
of
T. 6 S., R. 9 E.

BOOK 3847

chains


N.0°06'E. on true line bet. secs. 14 and 15.
Over level land, thru scattering brush and timber.

39.84 Set an iron post 3 ft. long 1 in. diam., 33 ins.in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked



Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.

79.68 Set an iron post 3 ft. long 2 ins.diam., 33 ins.in ground
for cor. of secs. 10,11,14 and 15, with brass cap marked



Raise a mound of stone 3 ft. base 2 ft. high W. of cor.


Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: Paloverde and ironwood.
Undergrowth: Mesquite, sage and greasewood.

From the cor. of secs. 11,12,13 and 14.
N.89°20'W. on true line bet. secs. 11 and 14. ($E\frac{1}{2}$)
Over level land, thru scattering timber and brush.

30.90 Wash, 15 lks. wide, course NW.

40.61 The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square,
3 ft. long, lying on ground. Scribe marks not legible.
In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins.in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked



Raise a mound of stone 3 ft. base 2 ft. high N. of cor.

Thence, S.89°11'W. on true line bet. secs. 11 and 14. ($W\frac{1}{2}$)
Over level land, thru scattering timber and brush.

40.13 The cor. of secs. 10,11,14 and 15.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: Paloverde and ironwood.
Undergrowth: Mesquite, sage and greasewood.

Resurvey of the Subdivisions
of
T. 6 S., R. 9 E.

chains													
	N.0°18'E. on true line bet. secs. 10 and 11. Over level land, thru scattering timber and brush.												
36.30	Wash, 10 lks. wide, course NW.												
39.84	Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked												
	$\frac{1}{4}$ <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 0 5px;">S 10</td> <td style="border-left: 1px solid black; padding: 0 5px;">S 11</td> </tr> <tr> <td colspan="2" style="text-align: center; padding-top: 5px;">1928</td> </tr> </table>	S 10	S 11	1928									
S 10	S 11												
1928													
	Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.												
79.68	Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 2, 3, 10 and 11, with brass cap marked												
	<table style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 0 5px;">T 6</td> <td style="padding: 0 5px;">S R</td> <td style="padding: 0 5px;">9 E</td> </tr> <tr> <td style="padding: 0 5px;">S 3</td> <td style="border-left: 1px solid black; padding: 0 5px;">S 2</td> <td></td> </tr> <tr> <td style="padding: 0 5px;">S 10</td> <td style="border-left: 1px solid black; padding: 0 5px;">S 11</td> <td></td> </tr> <tr> <td colspan="3" style="text-align: center; padding-top: 5px;">1928</td> </tr> </table>	T 6	S R	9 E	S 3	S 2		S 10	S 11		1928		
T 6	S R	9 E											
S 3	S 2												
S 10	S 11												
1928													
	Raise a mound of stone 3 ft. base 2 ft. high W. of cor. Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: Paloverde and ironwood. Undergrowth: Mesquite, sage and greasewood.												
	From the cor. of secs. 1, 2, 11 and 12. S.89°26'W. on true line bet. secs. 2 and 11. Over level land, thru scattering timber and brush.												
40.20	Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked												
	$\frac{1}{4} \frac{S 2}{S 11}$ <p style="text-align: center;">1928</p>												
	Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.												
80.40	The cor. of secs. 2, 3, 10 and 11. Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: Paloverde and ironwood. Undergrowth: Mesquite, sage and greasewood.												
	N.0°15'E. on true line bet. secs. 2 and 3. Over level land, thru scattering timber and brush.												
39.84	Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked												
	$\frac{1}{4}$ <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 0 5px;">S 3</td> <td style="border-left: 1px solid black; padding: 0 5px;">S 2</td> </tr> <tr> <td colspan="2" style="text-align: center; padding-top: 5px;">1928</td> </tr> </table>	S 3	S 2	1928									
S 3	S 2												
1928													
	Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.												
77.75	Wash, 15 lks. wide, course NW.												
85.00	Wash, 10 lks. wide, course W.												
115.74	Wash, 15 lks. wide, course NW.												
118.46	Intersect the 1st stand. par. S., at a point 7.37 chs.,												

Resurvey of the Subdivisions

of

T. 6 S., R. 9 E.

BOOK 3847

chains

S. 89°23'E. of the stand. 1/4 sec. cor. sec. 35, described in book "C". At point of intersection,

Set an iron post 3 ft. long 2 ins. diam., 35 ins. in ground for closing cor. of secs. 2 and 3, with brass cap marked

T	5	S	R	9	E
		S		35	
		S	3	S	2
T	6	S	R	9	E
		C		C	
				1928	

Raise a mound of stone 3 ft. base 2 ft. high S. of cor.

Land: Level.
 Soil: Clayloam, 1st and 2d rate.
 Timber: None.
 Undergrowth: Mesquite, sage and greasewood.

From the cor. of secs. 33 and 34, only, on S. bdy. of Tp., which is an iron post 3 ins. diam., 6 ins. above ground, with brass cap marked

		T	6	S	
			S	33	S 34
R	9	E	S	4	S 3
			T	7	S
				1913	

Alongside cor. of fences extending N. and W.

N. 0°39'E. on true line bet. secs. 33 and 34. (S 1/2)
Over nearly level land, thru scattering timber and brush. Along fence line extending N.

- 23.10 Wash, 40 lks. wide, course W.
- 31.30 Wash, 15 lks. wide, course W.
- 37.10 Wash, 10 lks. wide, course W.

40.46 The 1/4 sec. cor., which is a mesquite stake 4 ins. square, 30 ins. above ground, scribe marks not legible. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for 1/4 sec. cor., with brass cap marked

		1/4	
		S	33 S 34
			1928

Raise a mound of stone 3 ft. base 1 1/2 ft. high W. of cor. Fence extending N. and S.

Thence, N. 0°02'W. on true line bet. secs. 33 and 34. (N 1/2)
Over nearly level land, thru scattering timber and brush.

- 17.45 Wash, 10 lks. wide, course SW.
- 38.55 Old winding road, bears NW. and SE.
- 39.63 Cor. of fences extending S. and E. bears E., 47 lks. dist.

40.02 Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 27, 28, 33 and 34, with brass cap marked

Resurvey of the Subdivisions

of

T. 6 S., R. 9 E.

chains

T 6	S R 9 E
S 28	S 27
S 33	S 34
1928	

Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Land: Nearly level.

Soil: Clayloam, 1st and 2d rate.

Timber: Paloverde and ironwood.

Undergrowth: Mesquite, sage and greasewood.

From the cor. of secs. 26, 27, 34 and 35.

N.89°15'W. on true line bet. secs. 27 and 34.

Over nearly level land, thru scattering timber and brush.

40.05 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S 27
	S 34
1928	

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.

78.90 Old winding road, bears NW. and SE.

80.10 The cor. of secs. 27, 28, 33 and 34.

Land: Nearly level.

Soil: Clayloam, 1st and 2d rate.

Timber: Paloverde and ironwood.

Undergrowth: Mesquite, sage and greasewood.

N.0°02'W. on true line bet. secs. 27 and 28. (S $\frac{1}{2}$)

Over nearly level land, thru scattering timber and brush.

3.10 Wash, 15 lks. wide, course W.

29.30 Wash, 50 lks. wide, course W.

30.90 Wash, 30 lks. wide, course NW.

36.25 Wash, 250 lks. wide, course W.

40.02 The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square, 12 ins long, lying on ground beside charred bottom of stake which is buried in a small mound of earth. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 28 S 27
1928

Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Thence, N.0°08'W. on true line bet. secs. 27 and 28. (N $\frac{1}{2}$)

Over nearly level land, thru scattering timber and brush.

7.08 Wash, 10 lks. wide, course W.

22.20 Wash, 10 lks. wide, course W.

40.08 Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 21, 22, 27 and 28, with brass cap marked

T 6	S R 9 E
S 21	S 22
S 28	S 27
1928	

Resurvey of the Subdivisions
of
T. 6 S. R. 9 E.

BOOK 3847

chains	<p>Raise a mound of stone 3 ft. base 2 ft. high W. of cor.</p> <p>Land: Nearly level. Soil: Clayloam, 1st and 2d rate. Timber: Paloverde and ironwood. Undergrowth: Mesquite, sage and greasewood.</p> <hr/> <p>From the cor. of secs. 22, 23, 26 and 27. N. 89° 28' W. on true line bet. secs. 22 and 27. (E 1/2) Over level land, thru scattering timber and brush. Wash, 30 lks. wide, course SW. The 1/4 sec. cor., which is a mesquite stake 4 ins. square, 30 ins. long, lying on ground beside old mound of earth, scribe marks not legible. In place of stake, which is deposited alongside,</p> <p>Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for 1/4 sec. cor., with brass cap marked</p> $\begin{array}{c} \frac{1}{4} S 22 \\ \frac{1}{4} S 27 \\ 1928 \end{array}$ <p>Raise a mound of stone 2 ft. base 1 1/2 ft. high N. of cor. Thence, N. 89° 15' W. on true line bet. secs. 22 and 27. (W 1/2) Over level land, thru scattering timber and brush.</p>
27.80 40.32	<p>The cor. of secs. 21, 22, 27 and 28.</p> <p>Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: Paloverde and ironwood. Undergrowth: Mesquite, sage and greasewood.</p> <hr/> <p>N. 0° 14' W. on true line bet. secs. 21 and 22. Over level land, thru scattering timber and brush.</p>
39.96	<p>Fence, extends E. and W. Wash, 15 lks. wide, course W.</p>
4.20 30.00	<p>Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for 1/4 sec. cor., with brass cap marked</p> $\begin{array}{c} \frac{1}{4} \\ S 21 S 22 \\ 1928 \end{array}$
40.08	<p>Raise a mound of stone 3 ft. base 2 ft. high W. of cor.</p>
6 2.10	<p>Wash, 10 lks. wide, course W.</p>
80.16	<p>Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 15, 16, 21 and 22, with brass cap marked</p> $\begin{array}{c} T 6 S R 9 E \\ S 16 S 15 \\ S 21 S 22 \\ 1928 \end{array}$ <p>Raise a mound of stone 3 ft. base 2 ft. high W. of cor.</p> <p>Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: Paloverde and ironwood. Undergrowth: Mesquite, sage and greasewood.</p> <hr/>

Resurvey of the Subdivisions
of
T. 6 S., R. 9 E.

chains	From the cor. of secs. 14, 15, 22 and 23. N. 89° 13' W. on true line bet. secs. 15 and 22. Over level land, thru scattering timber and brush.
40.17	Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked $\frac{1}{4} \begin{array}{l} S 15 \\ S 22 \end{array}$ 1928 Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.
80.34	The cor. of secs. 15, 16, 21 and 22. Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: Paloverde and ironwood. Undergrowth: Mesquite, sage and greasewood. ----- N. 0° 27' E. on true line bet. secs. 15 and 16. Over level land, thru scattering timber and brush.
5.50	Wash, 10 lks. wide, course W.
40.08	Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked $\frac{1}{4} \begin{array}{l} S 16 S 15 \end{array}$ 1928 Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.
59.65	Old winding road, bears NE. and SW.
65.15	Old winding road, (same) in bend, bears NE. and SE.
78.10	Wash, 10 lks. wide, course W.
80.16	Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 9, 10, 15 and 16, with brass cap marked $\begin{array}{c} T 6 S R 9 E \\ S 9 S 10 \\ S 16 S 15 \\ 1928 \end{array}$ 1928 Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor. Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: Paloverde and ironwood. Undergrowth: Mesquite, sage and greasewood. ----- From the cor. of secs. 10, 11, 14 and 15. N. 88° 50' W. on true line bet. secs. 10 and 15. Over level land, thru scattering timber and brush.
39.93	Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked $\frac{1}{4} \begin{array}{l} S 10 \\ S 15 \end{array}$ 1928 Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.

Resurvey of the Subdivisions
of
T. 6 S. R. 9 E.

BOOK 3847

chains

78.80 Old winding road, bears NE. and SW.


79.86 The cor. of secs. 9,10,15 and 16.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: Paloverde and ironwood.
Undergrowth: Mesquite, sage and greasewood.

N.0°09'E. on true line bet. secs. 9 and 10.
Over level land, thru scattering timber and brush.

37.50 Wash, 15 lks. wide, course W.

40.08 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for 1/4 sec. cor., with brass cap marked




Raise a mound of stone 2 ft. base 1 1/2 ft. high W. of cor.

40.80 Wash, 10 lks. wide, course W.

80.16 The cor. of secs. 3,4,9 and 10, which is a mesquite stake
4 ins. square, 3 ft. above ground, marked with 5 notches
on S., 3 notches on E. edge, scribed on 4 sides with
Roman numerals, but scribe marks not legible. In place
of stake, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs., 3,4,9 and 10, with brass cap marked




Raise a mound of stone 2 ft. base 1 1/2 ft. high W. of cor.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: Paloverde and ironwood.
Undergrowth: Mesquite, sage and greasewood.

From the cor. of secs. 2,3,10 and 11.
N.88°25'W. on true line bet. secs. 3 and 10.
Over level land, thru scattering timber and brush.

40.00 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for 1/4 sec. cor., with brass cap marked



Raise a mound of stone 3 ft. base 2 ft. high N. of cor.

63.10 Old winding road, bears NE. and SW.

80.00 The cor. of secs., 3,4,9 and 10.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: Paloverde and ironwood.
Undergrowth: Mesquite, sage and greasewood.

Resurvey of the Subdivisions
of

T. 6 S., R. 9 E.

chains

N.0°16'E. on true line bet. secs. 3 and 4.
Over level land, thru scattering timber and brush.

39.50 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4}$$

S	4	S
	3	

1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.

73.44 Wash, 15 lks. wide, course NW.

117.16 Intersect the 1st stand. Par. S. at a point 5.31 chs.,
S.89°23'E. of the stand. $\frac{1}{4}$ sec. cor. sec. 34, described
in book "C". At point of intersection.

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for closing cor. of secs. 3 and 4, with brass cap marked

T	5	S	R	9	E
		S	34		
	S	4	S	3	
			3		
T	6	S	R	9	E
		C	C		
		1	9		
		2	8		

Raise a mound of stone 3 ft. base 2 ft. high S. of cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: Paloverde and ironwood.

Undergrowth: Mesquite, sage and greasewood.

From the cor. of secs. 32 and 33, only, on S. bdy. of Tp.,
which is an iron post 3 ins. diam., 10 ins. above ground,
with brass cap marked

		T	6	S	
		S	32	S	33
R	9	E	S	5	S
				4	
			T	7	S
				1	9
				2	8

Under fence line extending E. and W.

N.0°09'E. on true line bet. secs. 32 and 33.
Over nearly level land, thru scattering timber and brush.

5.90 Old winding road, bears NE. and SW.

21.40 Wash, 15 lks. wide, course SW.

32.70 Wash, 15 lks. wide, course SW.

40.13 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4}$$

S	32	S
	33	

1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.

50.10 Dim winding road, bears E. and W.

68.10 Wash, 10 lks. wide, course SW.

80.26 The cor. of secs. 28, 29, 32 and 33, which is a mesquite

Resurvey of the Subdivisions

of

T. 6 S., R. 9 E.

OK 881

chains

stake, 4 ins. square, 28 ins. above ground, scribe marks not legible. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 28, 29, 32 and 33, with brass cap marked

T 6 S R 9 E	
S 29	S 28
S 32	S 33
1928	

Raise a mound of stone 3 ft. base 2 ft. high W. of cor. Cor. is at cor. of fences extending N. and E. Old fence line extends W.

Land: Nearly level.
Soil: Clayloam, 1st and 2d rate.
Timber: Paloverde and ironwood.
Undergrowth: Mesquite, sage and greasewood.

From the cor. of secs. 27, 28, 33 and 34.
N. 89° 33' W. on true line bet. secs. 28 and 33.
Over nearly level land, thru scattering timber and brush.

- 1.50 Old winding road, bears NW. and SE.
- 40.10 Old winding road, bears NW. and SE.
- 40.18 Fence, extends N. and S.; cor. of fences extending N. and W. bears S., 8 lks. dist.
- 40.20 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for 1/4 sec. cor., with brass cap marked

1/4 S 28
1/4 S 33
1928

Raise a mound of stone 2 ft. base 1 1/2 ft. high N. of cor.

- 66.30 Wash, 15 lks. wide, course SW.
- 80.40 The cor. of secs. 28, 29, 32 and 33.

Land: Nearly level.
Soil: Clayloam, 1st and 2d rate.
Timber: Paloverde and ironwood.
Undergrowth: Mesquite, sage and greasewood.

North on true line bet. secs. 28 and 29. (S 1/2)
Over nearly level land, thru scattering timber and brush.

- 9.10 Cor. of fences extending S. and W.
- 22.70 Wash, 30 lks. wide, course W.
- 31.50 Wash, 3 1/2 chs. wide, course W.
- 36.00 Fence, extends N. 20° E. and S. 20° W.

- 40.08 The 1/4 sec. cor., which is a mesquite stake 4 ins. square, 2 1/2 ft. above ground, scribe marks not legible. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for 1/4 sec. cor., with brass cap marked

1/4
S 29 S 28
1928

Raise a mound of stone 2 ft. base 1 1/2 ft. high W. of cor.

Resurvey of the Subdivisions

of

T. 6 S., R. 9 E.


chains

Thence, N.0°16'E. on true line bet. secs. 28 and 29. (N½)
Over nearly level land, thru scattering timber and brush.

- 12.20 Wash, 10 lks. wide, course SW.
- 37.10 Wash, 15 lks. wide, course W.
- 39.00 Fence, extends E. and W.

40.16 The cor. of secs. 20,21,28 and 29, which is a mesquite stake, 4 ins. square, 18 ins. long, lying on ground, beside old mound of earth, marked with 2 notches on S. and 4 notches on E. edge, scribe marks not legible. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins.in ground for cor. of secs. 20,21,28 and 29, with brass cap marked




Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Land: Nearly level.
Soil: Clayloam, 1st and 2d rate.
Timber: Paloverde and ironwood.
Undergrowth: Mesquite, sage and greasewood.

From the cor. of secs. 21,22,27 and 28.
N.89°26'W. on true line bet. secs. 21 and 28.
Over nearly level land, thru scattering timber and brush.

- 28.00 Old winding road, bears NE. and SW.
- 31.46 Fence, extends N. and S.; cor. of fences extending S., E. and W. bears N., about 2 chs. dist.
- 40.10 Set an iron post 3 ft. long 1 in. diam., 33 ins.in ground for ¼ sec. cor., with brass cap marked



Raise a mound of stone 3 ft. base 2 ft. high N.of cor.

- 58.80 Wash, 20 lks. wide, course NW.
- 61.90 Fence, extends N. and S.; cor. of fences extending N.,S. and W. bears S., 130 lks. dist.
- 68.40 Wash, 20 lks. wide, course SW.


80.20 The cor. of secs. 20,21,28 and 29.

Land: Nearly level.
Soil: Clayloam, 1st and 2d rate.
Timber: Paloverde and ironwood.
Undergrowth: Mesquite, sage and greasewood.

N.0°15'E. on true line bet. secs. 20 and 21. (S½)
Over level land, thru scattering timber and brush.

40.00 The ¼ sec. cor., which is a mesquite stake 4 ins. square, 20 ins. long, lying on ground beside old mound of earth, scribe marks not legible. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins.in ground for ¼ sec. cor., with brass cap marked



Resurvey of the Subdivisions
of
T. 6 S., R. 9 E.

BOOK 887

chains	<p>Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor. Thence, N. $0^{\circ}42'W.$ on true line bet. secs. 20 and 21. ($N\frac{1}{2}$) Over level land, thru scattering timber and brush.</p>
17.70	Wash, 10 lks. wide, course W.
18.80	Wash, 25 lks. wide, course W.
39.90	Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 16, 17, 20 and 21, with brass cap marked
	<p style="text-align: center;">T 6 S R 9 E S 17 S 16 S 20 S 21 1928</p>
	<p>Raise a mound of stone 3 ft. base 2 ft. high W. of cor. Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: Paloverde and ironwood. Undergrowth: Mesquite, sage and greasewood.</p> <p>-----</p>
	<p>From the cor. of secs. 15, 16, 21 and 22. N. $89^{\circ}22'W.$ on true line bet. secs. 16 and 21. ($E\frac{1}{2}$) Over level land, thru scattering timber and brush.</p>
10.50	Old winding road, bears N. and S.
40.31	The $\frac{1}{4}$ sec. cor., which is a mesquite stake 3 ins. square, 14 ins. above ground, scribe marks not legible. In place of stake, which is deposited alongside,
	Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked
	<p style="text-align: center;">$\frac{1}{4}$ S 16 $\frac{1}{4}$ S 21 1928</p>
	<p>Raise a mound of stone 3 ft. base 2 ft. high N. of cor. Thence, N. $89^{\circ}55'W.$ on true line bet. secs. 16 and 21. ($W\frac{1}{2}$) Over level land, thru scattering timber and brush.</p>
39.93	The cor. of secs. 16, 17, 20 and 21. Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: Paloverde and ironwood. Undergrowth: Mesquite, sage and greasewood.

	<p>N. $0^{\circ}38'E.$ on true line bet. secs. 16 and 17. Over level land, thru scattering timber and brush.</p>
39.90	Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked
	<p style="text-align: center;">$\frac{1}{4}$ S 17 S 16 1928</p>
	<p>Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.</p>
66.00	Wash, 10 lks. wide, course NW.
79.80	Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 8, 9, 16 and 17, with brass cap marked

Resurvey of the Subdivisions

of

T. 6 S., R. 9 E.

chains

$$\begin{array}{r} T\ 6\ S\ R\ 9\ E \\ S\ 8\ |S\ 9 \\ \hline S\ 17\ |S\ 16 \\ 1928 \end{array}$$

Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: Paloverde and ironwood.

Undergrowth: Mesquite, sage and greasewood.

From the cor. of secs. 9, 10, 15 and 16.

N. 89° 52' W. on true line bet. secs. 9 and 16.

Over level land, thru scattering timber and brush.

40.03 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\begin{array}{r} \frac{1}{4} S\ 9 \\ \hline \frac{1}{4} S\ 16 \\ 1928 \end{array}$$

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.

80.06 The cor. of secs. 8, 9, 16 and 17.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: Paloverde and ironwood.

Undergrowth: Mesquite, sage and greasewood.

N. 0° 12' E. on true line bet. secs. 8 and 9.

Over level land, thru scattering timber and brush.

39.90 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\begin{array}{r} \frac{1}{4} \\ S\ 8\ |S\ 9 \\ 1928 \end{array}$$

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.

55.80 Wash, 15 lks. wide, course NW.

79.80 Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 4, 5, 8 and 9, with brass cap marked

$$\begin{array}{r} T\ 6\ S\ R\ 9\ E \\ S\ 5\ |S\ 4 \\ \hline S\ 8\ |S\ 9 \\ 1928 \end{array}$$

Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: Paloverde and ironwood.


Undergrowth: Mesquite, sage and greasewood.

Resurvey of the Subdivisions
of
T. 6 S. R. 9 E.

chains

From the cor. of secs. 3, 4, 9 and 10.
S. 89° 50' W. on true line bet. secs. 4 and 9.
Over level land, thru scattering timber and brush.

39.95 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for 1/4 sec. cor., with brass cap marked




Raise a mound of stone 2 ft. base 1 1/2 ft. high N. of cor.

79.90 The cor. of secs. 4, 5, 8 and 9.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: Paloverde and ironwood.
Undergrowth: Mesquite, sage and greasewood.

N. 0° 10' E. on true line bet. secs. 4 and 5.
Over level land, thru scattering timber and brush.


39.90 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for 1/4 sec. cor., with brass cap marked



Raise a mound of stone 2 ft. base 1 1/2 ft. high W. of cor.

118.11 Intersect the 1st stand. par. S., at 3.18 chs., S. 89° 23' E.
of the stand. 1/4 sec. cor. sec. 33, described in book "C".
At point of intersection,


Set an iron post 3 ft. long 2 ins. diam., 35 ins. in ground
for closing cor. of secs. 4 and 5, with brass cap marked



Raise a mound of stone 3 ft. base 2 ft. high S. of cor.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: Paloverde and ironwood.
Undergrowth: Mesquite, sage and greasewood.

From the cor. of secs. 31 and 32, only, on S. bdy. of Tp.,
which is an iron post 3 ins. diam., 9 ins. above ground,
with brass cap marked

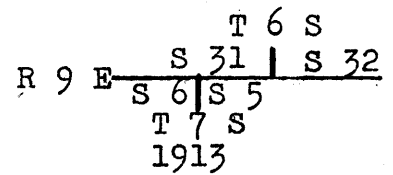

Under fence line extending E. and W.

North on true line bet. secs. 31 and 32.
Over level land, thru scattering timber and brush.

Resurvey of the Subdivisions
of

T. 6 S., R. 9 E.

chains

14.00 Old winding road, bears NE. and SW.

22.20 Wash, 30 lks. wide, course SW.

27.50 Fence, extends N.5°E. and S.5°W.

40.01 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$

S 31 | S 32

1928

Raise a mound of stone 2 ft. base 2 ft. high W. of cor.

47.50 Wash, 120 lks. wide, course W.

80.02 Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 29, 30, 31 and 32, with brass cap marked

T 6 S R 9 E

S 30 | S 29

S 31 | S 32

1928

Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: Paloverde and ironwood.

Undergrowth: Mesquite, sage and greasewood.

From the cor. of secs. 28, 29, 32 and 33.

N.89°34'W. on true line bet. secs. 29 and 32.

Over level land, thru scattering timber and brush.

40.15 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 29
 $\frac{1}{4}$ S 32

1928

Raise a mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high N. of cor.

79.00 Fence, extends N. and S.; cor. of fences extending N., S.
and E. bears N., 40 lks. dist.

80.30 The cor. of secs. 29, 30, 31 and 32.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: Paloverde and ironwood.

Undergrowth: Mesquite, sage and greasewood.

From the cor. of secs. 25, 30, 31 and 36, on W. bdy. of Tp.,
described in book "G" of this group.

S.89°33'E. on true line bet. secs. 30 and 31. (W $\frac{1}{2}$)

Over level land, thru scattering timber and brush.

13.40 Dim winding road, bears NW. and SE.

35.18 The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square,
30 ins. above ground, scribe marks not legible. In
place of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

Resurvey of the Subdivisions
of
T. 6 S. R. 9 E.

BOOK 5000

chains

$\frac{1}{4}$ S 30
 $\frac{1}{4}$ S 31
1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.

Thence, S. $89^{\circ}21'E$. on true line bet. secs. 30 and 31. ($E\frac{1}{2}$)
Over level land, thru scattering timber and brush.

0.40 Wash, 25 lks. wide, course SW.

40.10 The cor. of secs. 29, 30, 31 and 32.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: Paloverde and ironwood.
Undergrowth: Mesquite, sage and greasewood.

N. $0^{\circ}21'E$. on true line bet. secs. 29 and 30. ($S\frac{1}{2}$)
Over level land, thru scattering timber and brush.

40.01 The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square,
4 ft. long, lying on ground beside old mound of earth.
Scribe marks no longer legible. In place of stake,
which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 30 | S 29
1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.

Thence, N. $0^{\circ}04'W$. on true line bet. secs. 29 and 30. ($N\frac{1}{2}$)
Over level land, thru scattering timber and brush.

8.00 Wash, 30 lks. wide, course W.

39.50 Cor. of fences extending S. and E. bears E., 3 chs. dist.

40.01 Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 19, 20, 29 and 30, with brass cap marked

T 6 S R 9 E
S 19 | S 20
S 30 | S 29
1928

Raise a mound of stone 3 ft. base 2 ft. high W. of cor.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: Paloverde and ironwood.
Undergrowth: Mesquite, sage and greasewood.

From the cor. of secs. 20, 21, 28 and 29.
N. $89^{\circ}38'W$. on true line bet. secs. 20 and 29. ($E\frac{1}{2}$)
Over level land, thru scattering timber and brush.

40.19 The $\frac{1}{4}$ sec. cor., which is a mesquite stake 3 ins. square,
20 ins. long, lying on ground, scribe marks no legible.
In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 20
 $\frac{1}{4}$ S 29
1928

BOOK 3847

Resurvey of the Subdivisions
of

T. 6 S. R. 9 E.

chains

Raise a mound of stone 2 ft. base 1½ ft. high N. of cor.
Fence extending E. and W. bears S., 113 lks. dist.

Thence, N.89°57'W. on true line bet. secs. 20 and 29. (W½)
Over level land, thru scattering timber and brush.

40.06 The cor. of secs. 19,20,29 and 30.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: Paloverde and ironwood.
Undergrowth: Mesquite, greasewood and sage.

From the cor. of secs. 19,24,25 and 30, on W. bdy. of Tp.,
described in book "G" of this group.
S.89°37'E. on true line bet. secs. 19 and 30.
Over level land, thru scattering timber and brush.

35.13 Set an iron post 3 ft. long 1 in. diam., 33 ins.in ground
for ¼ sec. cor., with brass cap marked

1 S 19
4 S 30

1928

Raise a mound of stone 2 ft. base 1½ ft. high N. of cor.

75.16 The cor. of secs. 19,20,29 and 30.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: Paloverde and ironwood.
Undergrowth: Mesquite, greasewood and sage.

N.0°02'E. on true line bet. secs. 19 and 20.
Over level land, thru scattering timber and brush.

40.01 Set an iron post 3 ft. long 1 in. diam., 33 ins.in ground
for ¼ sec. cor., with brass cap marked

¼
S 19 | S 20

1928

Raise a mound of stone 2 ft. base 1½ ft. high W. of cor.

44.15 Wash, 30 lks. wide, course W.
53.85 Wash, 20 lks. wide, course W.

80.02 Set an iron post 3 ft. long 2 ins. diam., 33 ins.in ground
for cor. of secs. 17,18,19 and 20, with brass cap marked

T 6 S R 9 E
S 18 | S 17
S 19 | S 20
1928

Raise a mound of stone 2 ft. base 1½ ft. high W. of cor.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: Paloverde and ironwood.
Undergrowth: Mesquite, greasewood and sage.

Resurvey of the Subdivisions
of
T. 6 S., R. 9 E.

BOOK 5742

chains

From the cor. of secs. 16,17,20 and 21.
N.89°40'W. on true line bet. secs. 17 and 20.
Over level land, thru scattering timber and brush.

39.92 Set an iron post 3 ft. long 1 in. diam., 33 ins.in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4} \frac{S 17}{S 20}$

1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.

79.84 The cor. of secs. 17,18,19 and 20.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: Paloverde and ironwood.

Undergrowth: Mesquite, greasewood and sage.

From the cor. of secs. 13,18,19 and 24 on W. bdy. of Tp.,
described in book "G" of this group.

S.89°46'E. on true line bet. secs. 18 and 19.

Over level land, thru scattering timber and brush.

18.00 Dim winding road, bears N. and S.

21.30 New Florence-Casa Grande Canal, 60 lks. wide, course S.

34.99 Set an iron post 3 ft. long 1 in. diam., 33 ins.in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4} \frac{S 18}{S 19}$

1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.

74.89 The cor. of secs. 17,18,19 and 20.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: Paloverde and ironwood.

Undergrowth: Mesquite, greasewood and sage.

N.0°20'E. on true line bet. secs. 17 and 18.

Over level land, thru scattering timber and brush.

40.01 Set an iron post 3 ft. long 1 in. diam., 33 ins.in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 18 | S 17

1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.

80.02 The cor. of secs. 7,8,17 and 18, which is a mesquite
stake, $\frac{1}{4}$ ins. square, 2 ft. long, lying on ground be-
side old mound of earth. Scribe markspot legible. In
place of stake, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins.in ground
for cor. of secs. 7,8,17 and 18, with brass cap marked

T 6 S R 9 E

S 7 | S 8
S 18 | S 17

1928

Resurvey of the Subdivisions
of
T. 6 S., R. 9 E.

chains

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: Paloverde and ironwood.

Undergrowth: Mesquite, greasewood and sage.

40.08

From the cor. of secs. 8, 9, 16 and 17.

N. $89^{\circ}30'$ W., on true line bet. secs. 8 and 17.

Over level land, thru scattering timber and brush.

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4} \begin{array}{l} S 8 \\ S 17 \end{array}$$

1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.

80.16

The cor. of secs. 7, 8, 17 and 18.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: Paloverde and ironwood.

Undergrowth: Mesquite, sage and greasewood.

From the cor. of secs. 7, 12, 13 and 18, on W. bdy. of Tp., described in book "G" of this group.

S. $89^{\circ}46'$ E. on true line bet. secs. 7 and 18.

Over level land, thru scattering timber and brush.

8.00

Florence-Casa Grande Canal, 25 lks. wide, course S. 25° W.

34.94

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4} \begin{array}{l} S 7 \\ S 18 \end{array}$$

1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.

35.00

Old winding road, bears NE. and SW.

39.30

New Florence-Casa Grande Canal, 60 lks. wide, course S. 25° W.

74.74

The cor. of secs. 7, 8, 17 and 18.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: Paloverde and ironwood.

Undergrowth: Mesquite, greasewood and sage.

N. $0^{\circ}15'$ E. on true line bet. secs. 7 and 8.

Over level land, thru scattering timber and brush.

40.04

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4} \begin{array}{l} S 7 \\ S 8 \end{array}$$

1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.

Resurvey of the Subdivisions
of
T. 6 S., R. 9 E.

BOOK 3847

chains

80.08 Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 5,6,7 and 8, with brass cap marked

T 6 S R 9 E
S 6 | S 5
S 7 | S 8
1928

Raise a mound of stone 2 ft. base 1 1/2 ft. high W. of cor.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: Paloverde and ironwood.
Undergrowth: Mesquite, sage and greasewood.

From the cor. of secs. 4,5,8 and 9.
N.89°23'W. on true line bet. secs. 5 and 8.
Over level land, thru scattering timber and brush.

40.01 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for 1/4 sec. cor., with brass cap marked

1/4 S 5
S 8
1928

Raise a mound of stone 2 ft. base 1 1/2 ft. high N. of cor.

80.02 The cor. of secs. 5,6,7 and 8.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: Paloverde and ironwood.
Undergrowth: Mesquite, greasewood and sage.

From the cor. of secs. 1,6,7 and 12 on W. bdy. of Tp., described in book "G" of this group.
S.89°51'E. on true line bet. secs. 6 and 7.
Over level land, thru scattering timber and brush.

- 15.09 Cor. of fences extending N.,S. and W. bears S., 5 lks. dist.
- 15.60 Old winding road, bears N. and S.
- 15.85 Florence-Casa Grande canal, 25 lks. wide, course SW.
- 16.00 W. end of fence extending E. bears S., 8 lks. dist.

35.07 The (local) 1/4 sec. cor., which is an iron pipe 1 in. diam., 6 ins. above ground. In place of pipe, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for 1/4 sec. cor., with brass cap marked

1/4 S 6
S 7
1928

Raise a mound of stone 2 ft. base 1 1/2 ft. high N. of cor.
Continue line and measurement.

- 35.24 Cor. of fences extending N.,S. and W. bears S., 8 lks. dist.
- 48.15 Old winding road, bears NE. and SW.
- 48.60 New Florence-Casa Grande Canal, 60 lks. wide, course S.10°W.

75.04 The cor. of secs. 5,6,7 and 8.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: Paloverde and ironwood.
Undergrowth: Mesquite, sage and greasewood.

Resurvey of the Subdivisions
of
T. 6 S., R. 9 E.

chains

N.0°09'E. on true line bet. secs. 5 and 6.
Over level land, thru scattering timber and brush.

40.04 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 6 | S 5
1928

Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high W. of cor.

68.84 Canal, 50 lks. wide, course S.30°W. (New Florence*Casa
Grande Canal)

70.24 Old winding road, bears NE. and SW.

90.24 A windmill bears N.77 $\frac{1}{2}$ °W.; a windmill bears N.45 $\frac{1}{4}$ °W.

118.22 Intersect the 1st. stand. par. S. at 1.02 chs. S.89°23'E.
of the stand. $\frac{1}{4}$ sec. cor. sec. 32, described in book "C".
At point of intersection,

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for closing cor. of secs. 5 and 6, with brass cap marked

T 5 S R 9 E
S 32
S 6 | S 5
T 6 S R 9 E
C C
1928

Raise a mound of stone 3 ft. base 2 ft. high S. of cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: Paloverde and ironwood.

Undergrowth: Mesquite, sage and greasewood.

T. 6 S., R. 9 E.

The continued satisfactory adjustment of Buff Transit No. 10125, used by Otis O. Gould, U.S. Transitman, in the execution of the resurveys described in the foregoing notes is indicated from the following field tests:

May 6, 1928, At the station and on the meridian (described on Page 1 of book "A" of this group) near the center of sec. 29, T.6 S., R.6 E., G. and S.R. base and Meridian, Arizona, in latitude $32^{\circ}52\frac{1}{2}'N.$ and longitude $111^{\circ}45'W.$,

At 9h 0m a.m. app.t., set off $32^{\circ}52\frac{1}{2}'$ on the latitude arc, $16^{\circ}36\frac{1}{2}'N.$ on the declination arc and determine a meridian with the solar, which agrees with the true meridian.

At app. noon, with latitude arc unchanged, observe the sun on the meridian; the resultant reading of the declination arc is $16^{\circ}38'N.$, which agrees with the computed declination of the sun.

At 3h 0m p.m. app.t., with latitude arc unchanged, set off $16^{\circ}40\frac{1}{2}'N.$ on the declination arc and determine a meridian with the solar, which agrees with the true meridian.

As all of the observations taken during the usual hours of solar work agree within 1' of the true meridian, conclude that the instrument has been maintained in satisfactory adjustment.

May 6, 1928.

GENERAL DESCRIPTION

This township is situated in the valley of the Gila River. Drainage is west and northwest. Land is level or nearly level, except in sec. 36, which has the spur of a mountain, slopes NW. from the main ridge. Soil is a claylike loam, generally 1st and 2d rate and tillable, except for the SE. portion of the township, which is rocky.

Timber is scattering and consists of paloverde and ironwood. Undergrowth is scattering and consists of greasewood, sage and mesquite. The mesquite is of a sizesuitable for use as firewood.

There is no land under cultivation in the township, and there are no improvements save for a few miles of old wire fencing, presumably meant to enclose a cattle range. The grass is hardly suitable for anything more than sheep grazing in the spring of the year.

There is no indication of mineral activity in the township.

BOOK 3847

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Otis O. Gould U.S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer, for Group 150, Arizona bearing date of the 24th day of March, 1928, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, ~~RETRACED~~ all those parts or portions of the First Standard Parallel South in Range 10 East and ~~RESURVEYED~~ all those parts or portions of the East Boundary and Subdivision Lines of Township 6 South, Range 9 East of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said ~~retracement~~ and ~~resurvey~~ have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer, for Group 150, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of ~~such retracement and resurvey.~~

Place: Phoenix, Arizona

Date: May 12, 1928.

Otis O. Gould
 U.S. Transitman.

APPROVAL.

OFFICE OF U.S. SUPERVISOR OF SURVEYS,

Denver, Colo.. JUL 15 1929, 192

The foregoing field notes of the ~~retracement~~ of the First Standard Parallel South thru Part of Range 10 East and of the ~~resurvey~~ of the East Boundary and Subdivision Lines of Township 6 South, Range 9 East of the Gila and Salt River Base and Meridian, in the State of Arizona executed by Otis O. Gould, U.S. Transitman

under the special instructions dated March 24, 1928 for Group 150, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the ~~retracement and resurveys~~ they describe, are hereby approved.

Wm. H. Duman
 U.S. Supervisor of Surveys.

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~
~~has been correctly copied from the original notes on file in this office.~~

~~U. S. Surveyor General.~~