

FIELD NOTES

OF THE RESURVEY OF

the West Boundary and

Part of the North Boundary of

the Camp Verde Military Reservation (abandoned)

and

Part of the Subdivision Lines of

Township 14 North, Range 4 East

AND OF THE SURVEY OF

Part (completion) of the South Boundary

Part (completion) of the West Boundary of

Township 14 North, Range 4 East

Part (completion) of the Subdivision Lines of

Township 14 North, Range 4 East

Of the Gila and Salt River Base and Meridian,

In the State of ARIZONA

EXECUTED BY

Sidney E. Blout, U.S. Cadastral Engineer

and

Charles E. Hunter, U.S. Transitman

Supplemental
Under special instructions dated March 15, 1927, which provided
for the surveys included under Group No. 140, bearing the approval of the
Commissioner of the General Land Office under date of April 12, 1927
and assignment instructions dated July 1, 1927

Resurvey and Survey commenced November 8, 1927

Resurvey and Survey completed November 26, 1927

3851

3851

INDEX DIAGRAM.


Township _____, Range _____

6	5	4	3	2	1
7	8	9	10	11	12
13	17	16	15	14	13
19	20	21	22	23	24
29	29	28	27	26	25
31	32	33	34	35	36

Book "G"
Group 140 Arizona
Township 14 North Range 4 East

INDEX DIAGRAM

BOOK 3851

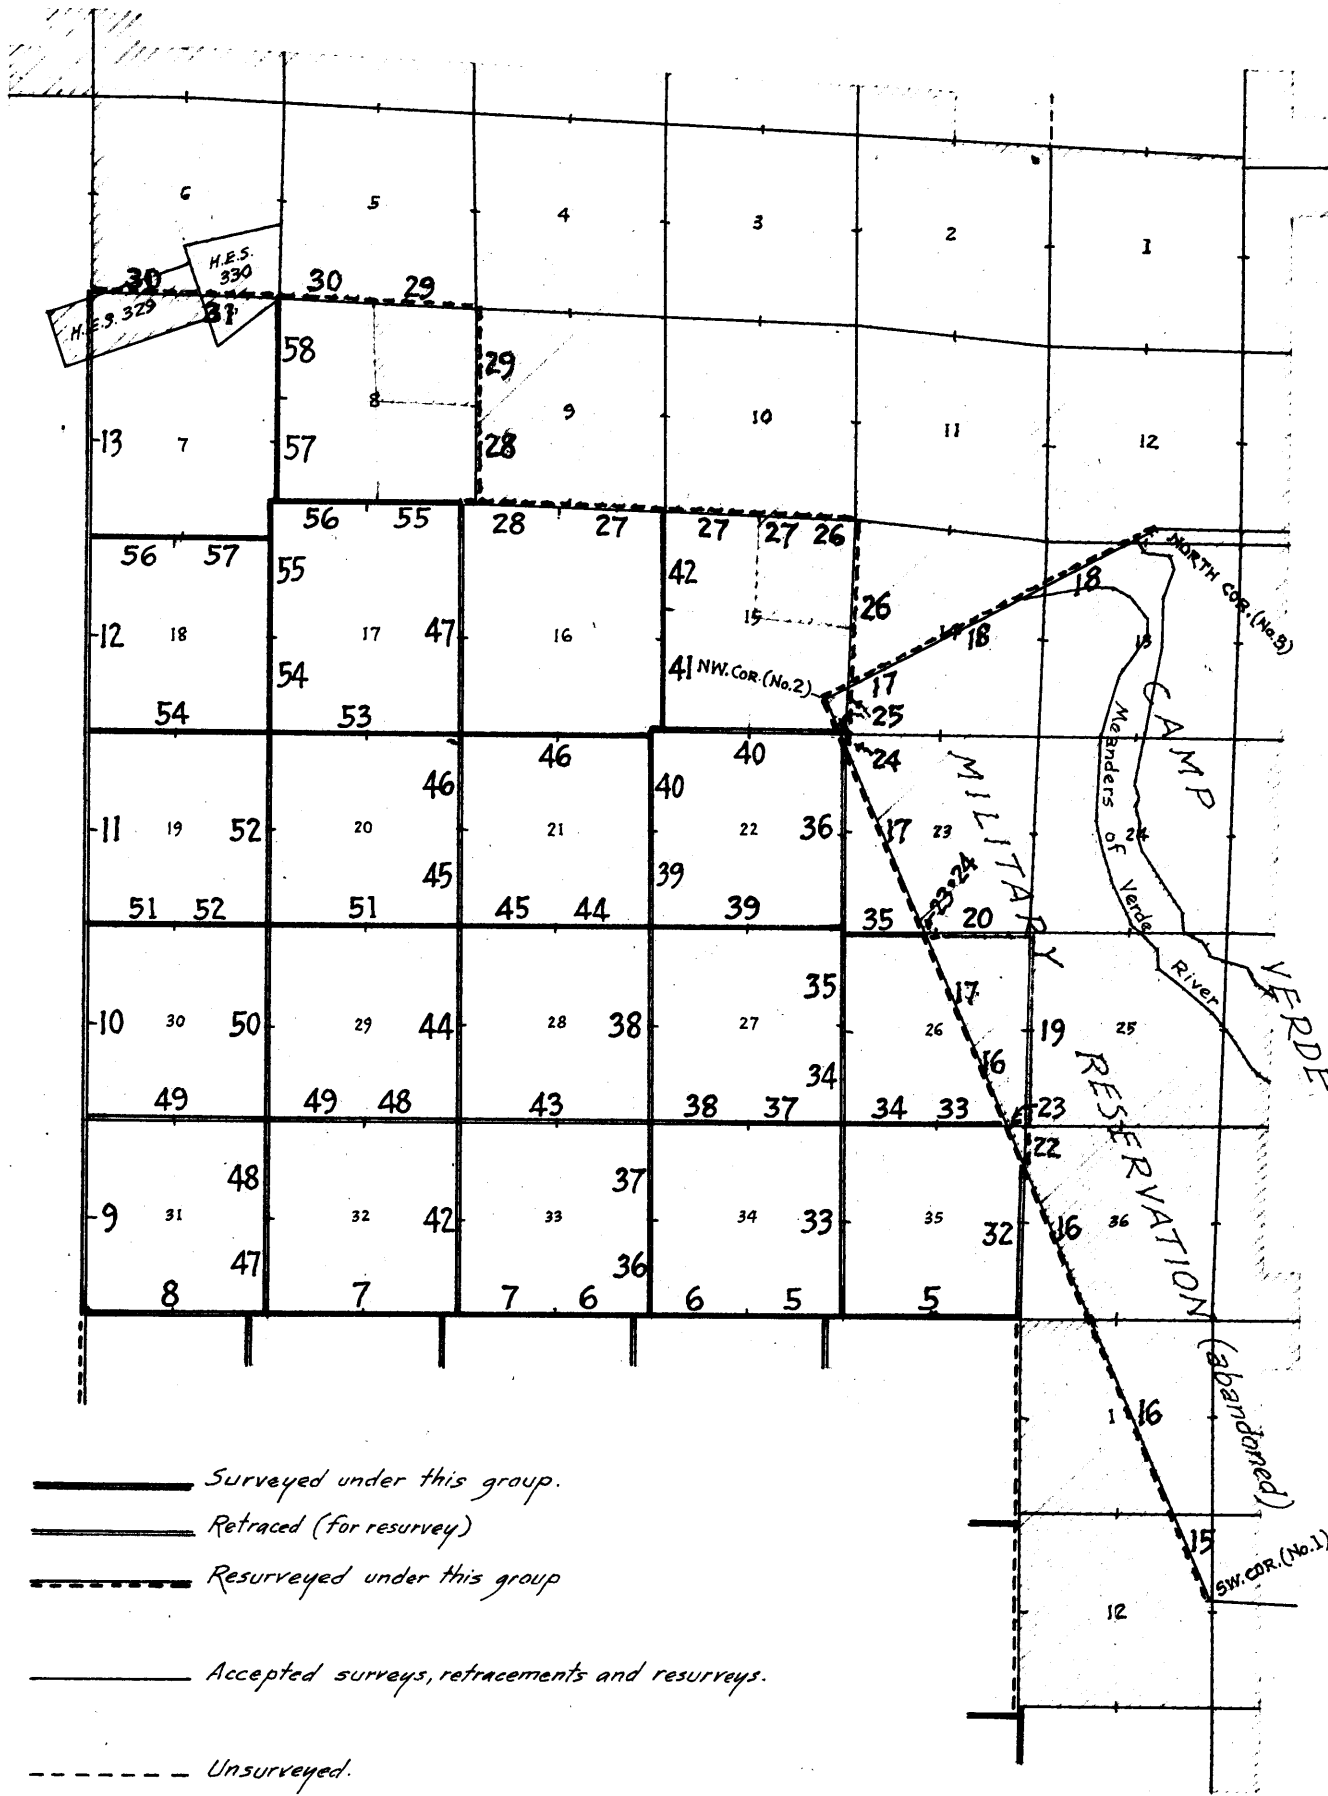


Book "G"
 Group 140 Arizona
 Township 14 North Range 4 East

DATE DIAGRAM

1927

BOOK 3851

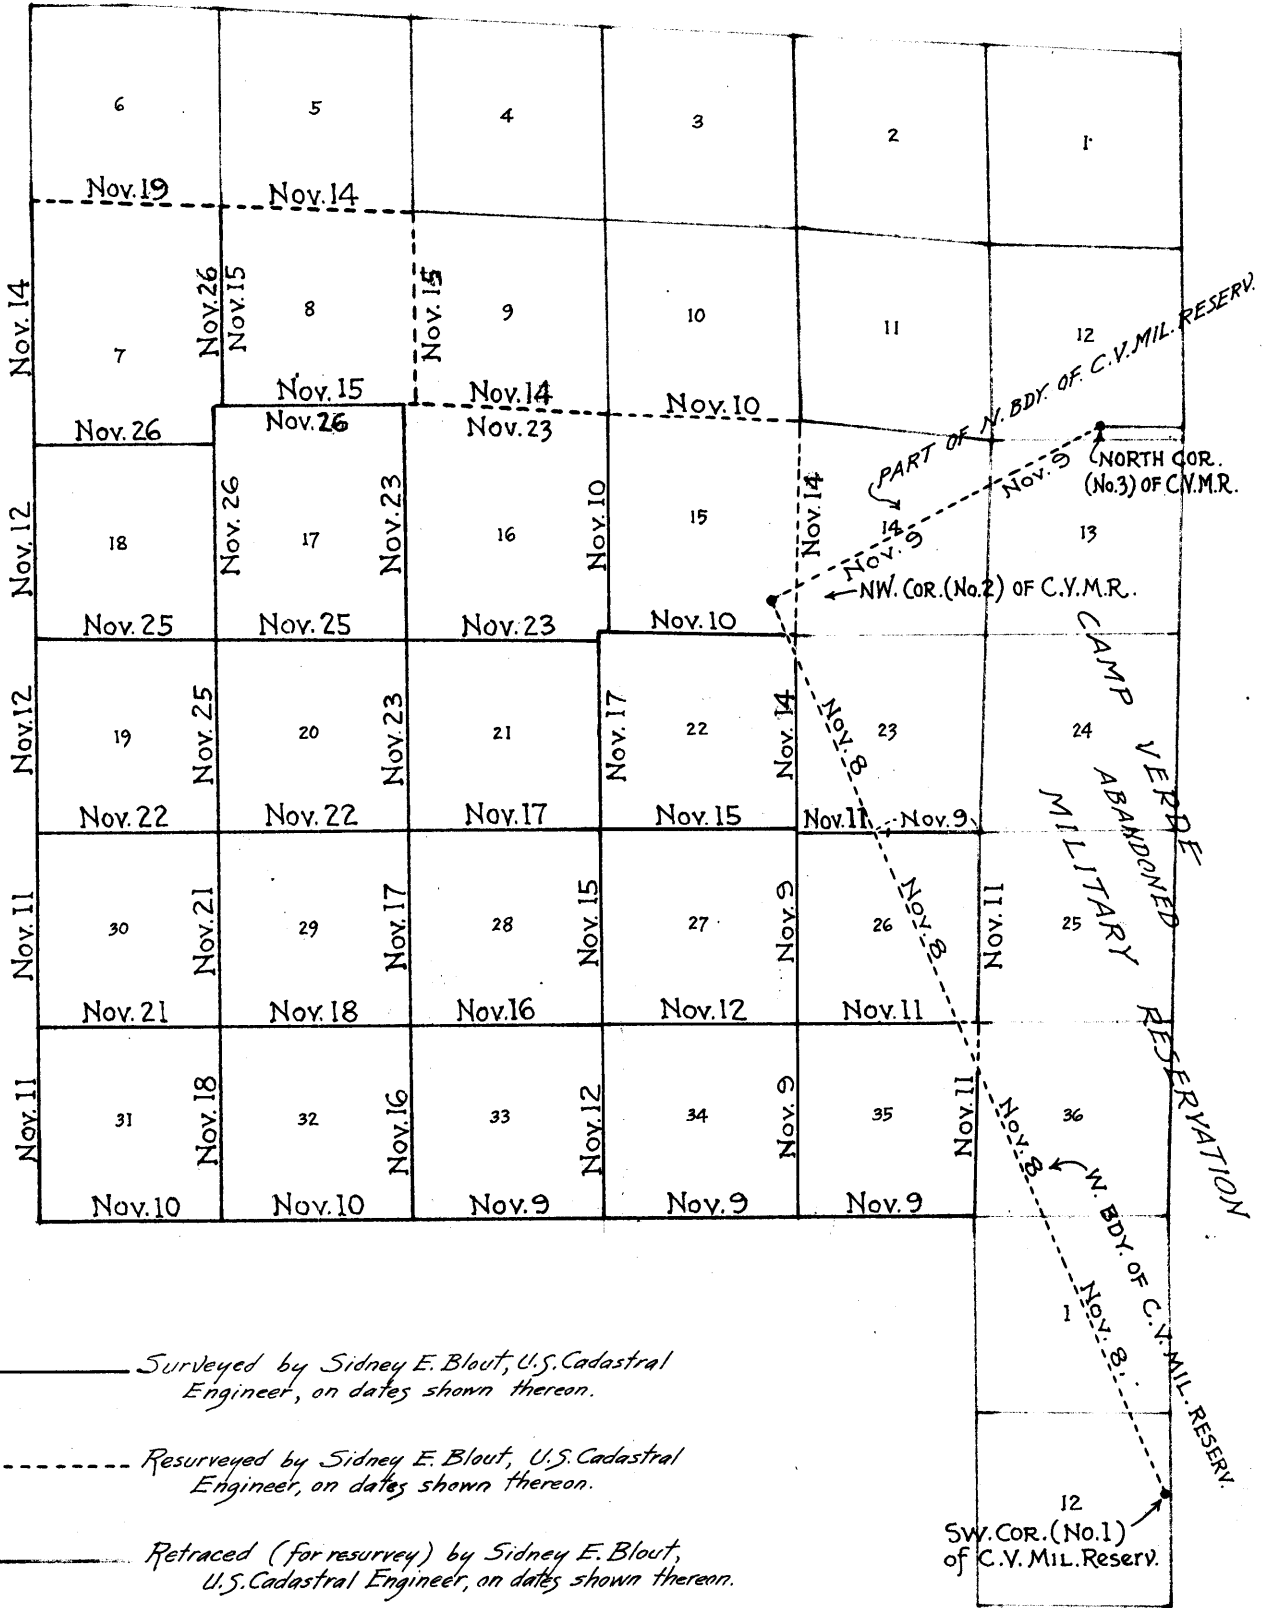

- Surveyed by Sidney E. Blout, U.S. Cadastral Engineer, on dates shown thereon.
- - - - - Resurveyed by Sidney E. Blout, U.S. Cadastral Engineer, on dates shown thereon.
- Retraced (for resurvey) by Sidney E. Blout, U.S. Cadastral Engineer, on dates shown thereon.
- Surveyed by Charles E. Hunter, U.S. Transitman, on dates shown thereon.
- - - - - Resurveyed by Charles E. Hunter, U.S. Transitman, on dates shown thereon.
- Accepted surveys, retracements and resurveys.

SW. COR. (No. 1)
 of C.V. MIL. Reserv.

The resurveys and surveys, hereinafter described were executed on dates shown on diagram on page 2 hereof, by Sidney E Blout, U.S. Cadastral Engineer, using a Buff "Rocky Mountain Favorite" solar transit No. 16724 with U-shaped standards, $4\frac{1}{2}$ inch horizontal circle, 4-inch vertical circle, and improved Smith solar attachment., and Charles E Hunter, U.S. Transitman, using a Young and Sons solar transit No. 8478 with full vertical circle and Smith solar attachment.

The instruments were examined, tested on the true meridian at the Federal Building at Phoenix Arizona, found correct and were approved by the District Cadastral Engineer for Arizona and California, July 1, 1927, conditional upon satisfactory field tests. All azimuth determinations are accomplished with the solar attachments, except the special observations on Polaris and the sun for meridian upon which to test the solar apparatus as stated in the field notes.

November 5, 1927. Examine the adjustments of each transit and correct all errors; then test the solar apparatus of each by comparing its indications resulting from solar observations made during a.m., and p.m. hours with a meridian determined by observations on Polaris, using Buff transit No. 16724, as follows:;

November 5, 1927. At camp near the $\frac{1}{4}$ sec. cor. of. secs. 10 and 15. T.14 N., R.4 E., of the Gila and Salt River Base and Meridian Arizona. in latitude $34^{\circ}36'48''$ N. and Longitude $111^{\circ}54'48''$ W., at 4^h43^m p.m., l.m.t. observe Polaris at eastern elongation making four observations, two each with the telescope in direct and reversed positions, and mark the mean point in the line thus determined by a tack driven in a stake set firmly in the ground about 5.00 chs. N.

Azimuth of Polaris at eastern elongation----= $1^{\circ}18'54''$
h m

November 6. At 8 00 a.m., lay off the azimuth of Polaris $1^{\circ}19'$ to the west and mark the true meridian thus determined by a tally pin driven in a stake set firmly in the ground about 5.00 chs. N.

TEST OF BUFF TRANSIT NO. 16724
h m

November 6, 1927. At 9 00 a.m., app time set off $34^{\circ}37'$ N. on the lat. arc, $15^{\circ}48'$ S. on the decl. arc and determine a meridian with the solar and mark a point thereof on the stake already set about 5.00 chs. N. This point falls $0\frac{1}{2}'$ E. of the meridian established by the Polaris observation.

At apparent noon with the lat arc unchanged, observe the sun on the meridian and obtain a reading of $15^{\circ}50\frac{1}{2}'$ S. on the decl. arc which agrees with the computed declination of the sun for this hour.

h m
At 3 00 p.m., app. time with the lat arc unchanged, set off $15^{\circ}52\frac{1}{2}'$ S. on the decl. arc and determine a meridian with the solar and mark a point thereof by a tack driven in the stake already set about 5.00 chains N. This mark falls 1' W. of the meridian established by the Polaris observations.

TEST OF YOUNG AND SONS TRANSIT NO 8478

November 6, 1927. At 9^h00^m a.m., app. time, set off 34°37'N. on the lat. arc, 15°48'S. on the decl. arc and determine a meridian with the solar which agrees with the true meridian established by the Polaris observations.

At the same station at apparent noon, with the lat. arc unchanged, observe the sun on the meridian, the resulting reading on the decl. arc is 15°50'S. which is about 30" higher than the calculated declination of the sun.

At 3^h00^m p.m., app. time with the lat. arc unchanged, set off 15°52 $\frac{1}{2}$ 'S. on the decl. arc and determine a meridian with the solar and mark a point thereof by a tack driven in the stake already set about 5 chs. N. This point falls 0 $\frac{1}{2}$ ' E. of the mark determined by the Polaris observations.

As all of the observations made with both instruments during the usual hours of solar work come within 1'30" of the true meridian established by the Polaris observations, conclude that the adjustments of each of said instruments are satisfactory.

All measurements are made with Lufkin and Lallie steel tapes 5-chains in length, compared with a Chesterman standard steel tape, and found correct. The measurements are made on the slope, the vertical angles determined with a clinometer, and the slope measurements properly reduced to true horizontal distances for entry in the field notes.

Survey of Part (Completion) of
the South boundary of Township 14 North, Range 4 East

BOOK 8852

chains

The original cor. of secs. 1, 2, 35 and 36, Ts. 13 and 14 N., R. 4 E. is an iron post 3 ins. in diam., projecting 10 ins. above ground, firmly set, properly marked on brass cap, and witnessed by a mound of stone W. of cor.

Thence,
West, on true line, on S. bdy. of sec. 35.
Over rolling land, thru scattering undergrowth.
Ascend gradually over SE. slope.

1.30 Old road, bears N. 70° E. and S. 70° W.

6.00 Electric power transmission line from Fossil Creek to Jerome Arizona, bears NW. and SE.

7.70 Wash, 15 lks. wide, 4 ft. deep, course SE.

9.00 Telephone line, bears NW. and SE.

11.00 Leave rolling and enter mountainous land,
Ascend 190 ft. over SE. slope to

35.39 A point theoretically due South from the 1/4 sec. cor. of secs. 26 and 35, T. 14 N., R. 4 E. At this point, set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for 1/4 sec. cor. of sec. 35 only, marked on brass cap

1/4 S 35
1927

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

Ascend 30 ft. over SE. slope.

41.00 Top of spur, bears NE.
Descend 52 ft. over NW. slope.

47.00 Ravine, 5 lks. wide, course NE. Enter rolling land.
Ascend 50 ft. over NE. slope to

67.00 Wash, 8 lks. wide, 4 ft. deep, course NE.
Ascend 32 ft. over NE. slope to

73.65 Intersect random subdivision line run due south from the original cor. of secs. 14, 15, 22 and 23, T. 14 N., R. 4 E. At this point, set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 34 and 35 only, marked on brass cap

T14N R4E
S34 | S35
1927

from which
A juniper, 4 ins. in diam., bears N. 22° E., 84 lks. dist., marked T14N R4E S35 BT
A juniper, 6 ins. in diam., bears N. 66 1/4° W., 277 lks. dist., marked T14N R4E S34 BT

Land, rolling and mountainous.
Soil, sandy and rocky; 3rd rate.
Timber, none.
Undergrowth, greasewood and catclaw.

West, on true line, on S. bdy. of sec. 34.
Over rolling land, thru scattering undergrowth.
Ascend 20 ft. over NE. slope to

6.00 Wash, 8 lks. wide, 4 ft. deep, course N. 60° E.
Enter mountainous land. Ascend 86 ft. over SE. slope.

16.70 Top of spur, bears S.
Descend 18 ft. over SW. slope.

21.00 Wash, course SE.
Ascend 25 ft. over NE. slope.

22.00 Old road in bend from SW. to SE.

23.00 Same wash, course NE.
Ascend 220 ft. over SE. slope.

36.54 Top of gravelly spur, bears NE.
Descend 85 ft. over NW. slope to

Survey of Part (Completion) of
the South boundary of Township 14 North, Range 4 East

chains					
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. of sec. 34 only, marked on brass cap				
	$\frac{1}{4}$ S 34 <hr style="width: 50px; margin: auto;"/> 1927				
	from which				
	A pinion, 6 ins. in diam., bears N. $0\frac{3}{4}^{\circ}$ W., 45 lks. dist., marked $\frac{1}{4}$ S34 BT				
	A pinion, 8 ins. in diam., bears N. 60° W., 31 lks. dist., marked $\frac{1}{4}$ S34 BT				
	Descend 40 ft. over NW. slope.				
42.40	Wash, 5 lks. wide, course N. 30° E. Ascend 60 ft. over E. slope.				
45.00	Top of spur, bears N. Descend 40 ft. over W. slope.				
52.20	Draw, course N. Ascend gradually over NE. slope to				
63.80	Draw, course NE. Old road, bears NE. and SW. Ascend 15 ft. over E. slope.				
64.70	Old road, bears NW. and SE. Descend 20 ft. over NW. slope				
66.50	Wash, course N., joined at this point by a wash from SE., and another from SW. Ascend 100 ft. over E. slope.				
70.20	Top of spur, bears N. Descend 18 ft. over W. slope.				
72.00	Drain, course N. Ascend 68 ft. over E. slope.				
75.60	Top of spur, bears NE. Ascend gradually over N. slope to				
78.00	Descend 30 ft. over NW. slope to				
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 33 and 34 only, marked on brass cap				
	<table border="1" style="margin: auto;"> <tr> <td>T14N</td> <td>R4E</td> </tr> <tr> <td>S33</td> <td>S34</td> </tr> </table> <hr style="width: 50px; margin: auto;"/> 1927	T14N	R4E	S33	S34
T14N	R4E				
S33	S34				
	from which				
	A pinion, 4 ins. in diam., bears N. $76\frac{1}{2}^{\circ}$ E., 85 lks. dist., marked T14N R4E S34 BT				
	A pinion, 4 ins. in diam., bears N. $76\frac{1}{2}^{\circ}$ W., 145 lks. dist., marked T14N R4E S33 BT				
	Land, rolling and mountainous. Soil, stony, 3rd rate. Timber, juniper and pinion. Undergrowth, scrub oak and catclaw.				

	West, on true line, on S. bdy. of sec. 33. Over mountainous land, thru scattering timber and undergrowth. Descend 37 ft. over NW. slope.				
3.30	Drain, course N. Enter dense undergrowth. Ascend 300 ft. over NE. slope.				
26.50	Point of spur, bears N. Trail, bears NW. and SE. Descend 41 ft. over NW. slope.				
30.00	Bottom of ravine, course N. Ascend 193 ft. to $\frac{1}{4}$ sec. cor. over gravel bluffs facing NE.				
35.00	Enter dense timber, bears N. and S.				
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 33 only, marked on				

Survey of Patt (Completion) of

BOOK 3851

the South boundary of Township 14 North, Range 4 East

chains	brass cap				
	<u>¼ S 33</u>				
	1927				
	<p>from which A cedar, 8 ins. in diam., bears N.1°W., 28 lks. dist., marked ¼ S33 BT A cedar, 6 ins. in diam., bears N.55½°W., 35 lks. dist., marked ¼ S33 BT</p>				
62.00	Ascend 215 ft. over rocky, broken NE. slope thru dense timber and undergrowth.				
	Point of spur, bears NE.				
	Descend 83 ft. over NW. slope.				
73.00	Bottom of gulch, course N.70°E., containing a small stream of clear running water.				
	Leave dense and enter scattering timber.				
	Ascend 155 ft. over SE. slope to				
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, supported in a mound of stone, for cor. of secs. 32 and 33 only, marked on brass cap				
	<table border="1"> <tr><td>T14N</td><td>R4E</td></tr> <tr><td>S32</td><td>S33</td></tr> </table>	T14N	R4E	S32	S33
T14N	R4E				
S32	S33				
	1927				
	<p>from which A cedar, 8 ins. in diam., bears N.30½°E., 92 lks. dist., marked T14N R4E S33 BT A cedar, 18 ins. in diam., bears N.58½°W., 64 lks. dist., marked T14N R4E S32 BT</p>				
	<p>Land, mountainous. Soil, rocky, 3rd and 4th rate. Timber, cedar and pinion. Undergrowth, scrub oak and juniper.</p>				

	West, on true line, on S. bdy. of sec. 32.				
	Over mountainous land, thru scattering timber and dense undergrowth.				
	Ascend 580 ft. over steep SE. slope to rim of mesa.				
8.10	Old road, on dugway, bears NE. and SW.				
21.13	Drain, course SE.				
30.00	Rim of mesa, bears NE. and SW. Enter rolling land on mesa.				
	Ascend 52 ft. over SE. slope to				
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor. of sec. 32 only, marked on brass cap				
	<u>¼ S 32</u>				
	1927				
	<p>No bearing trees available. Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.</p>				
	Ascend gradually over S. slope.				
58.00	Descend 134 ft. over SW. slope to				
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., over a cross (X) marked on surface rock, and raise a mound of stone around post, for cor. of secs. 31 and 32 only, marked on brass cap				
	<table border="1"> <tr><td>T14 N</td><td>R4E</td></tr> <tr><td>S31</td><td>S32</td></tr> </table>	T14 N	R4E	S31	S32
T14 N	R4E				
S31	S32				
	1927				

Survey of Part (Completion) of
the South boundary of Township 14 North, Range 4 East

chains

No bearing trees available.

Land, mountainous and rolling.
Soil, rocky, 3rd and 4th rate.
Timber, cedar and pinion.
Undergrowth, scrub oak.

West, on true line, on S. bdy. of sec. 31.
Over rolling land, on mesa, thru scattering timber and
undergrowth.

Descend 78 ft. over SW. slope.

13.25 Wash, course S. An old lake bed bears S. 7.00 chs. dist.
Ascend 180 ft. over rolling SE. slope to $\frac{1}{4}$ sec. cor.

22.30 A point 57.83 chs. N. from the original cor. of Ts. 13
and 14 N., Rs. 3 and 4 E., described in book "I" of
this group.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the
ground, for $\frac{1}{4}$ sec. cor. of sec. 31 only, marked on
brass cap

$\frac{1}{4}$ S 31

1927

from which

A juniper, 8 ins. in diam., bears N. 30° E., 49 lks.
dist., marked $\frac{1}{4}$ S31 BT

A juniper, 4 ins. in diam., bears N. 40 $\frac{3}{4}$ ° W., 110 lks.
dist., marked $\frac{1}{4}$ S31 BT

Ascend gradually over rolling S. slope.

53.00 Descend 92 ft. over SW. slope.

60.00 Enter dense timber.

67.50 Wash, course NW.

Ascend 40 ft. over NE. slope to Tp. cor.

75.00 Leave dense and enter scattering timber.

76.87 Intersect the random range line run due south from the
original cor. of secs. 1, 6, 7 and 12, Ts. 14 N., Rs. 3 and
4 E.

At this point of intersection, set an iron post, 3 ft. long,
3 ins. in diam., 16 ins. in the ground to bedrock,
supported in a mound of stone, for reestablished cor.
of T. 14 N., R. 4 E. only (SW. cor.), marked on brass cap

	T14N
	R4E
T14N	S31
S36	R3E

1927

from which

A juniper, 6 ins. in diam., bears N. 32 $\frac{1}{2}$ ° E., 85 lks.
dist., marked T14N R4E S31 BT

A juniper, 4 ins. in diam., bears N. 53 $\frac{1}{4}$ ° E., 158 lks.
dist., marked T14N R4E S31 BT


Land, rolling.
Soil, rocky, 3rd rate.
Timber, cedar and juniper.
Undergrowth, scrub juniper and oak.

Survey of Part (Completion) of
the West boundary of Township 14 North, Range 4 East

chains

421.38 From the reestablished cor. of secs. 6 and 7, T. 14 N., R. 4 E., on W. bdy. of said Tp., hereinafter described, South, on random line, on West bdy. of T. 14 N., R. 4 E., for distance only, and at Intersect the South bdy. of T. 14 N., R. 4 E. surveyed due West as hereinbefore described. Reestablish the cor. of T. 14 N., R. 4 E. only (SW. cor.) at this point of intersection as hereinbefore described.

Thence,
North, on true line, on W. bdy. of sec. 31.
Over mountainous land, thru scattering timber and dense undergrowth.
Descend 97 ft. over NE. slope.
14.00 Wash, in bottom of ravine, course NW.
Leave scattering and enter dense timber, bearing NW. and SE.
Ascend 100 ft. over SW. slope to
30.00 Leave mountainous and enter rolling land on mesa.
Ascend 48 ft. over W. slope to
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 31 only, marked on brass cap




1927

from which

- A pinion, 8 ins. in diam., bears N. $54\frac{1}{2}^{\circ}$ E., 42 lks. dist., marked $\frac{1}{4}$ S31 BT
- A pinion, 12 ins. in diam., bears S. 44° E., 60 lks. dist., marked $\frac{1}{4}$ S31 BT

Continue over rolling W. slope on mesa, thru dense timber and undergrowth.

Descend gradually to
50.00 North rim of mesa, bears NE. and SW. Leave rolling land and mesa and enter mountainous land.
Descend 120 ft. over NW. slope to
62.00 Descend 335 ft. over cliffs facing NW.
77.00 Bottom of ravine, course N. 30° E.
Descend 15 ft. over E. slope to
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 30 and 31 only, marked on brass cap



1927

from which

- A juniper, 6 ins. in diam., bears N. 63° E., 77 lks. dist., marked T14N R4E S30 BT
- A juniper, 4 ins. in diam., bears S. 16° E., 20 lks. dist., marked T14N R4E S31 BT

Land, mountainous and rolling.
Soil, rocky, 3rd and 4th rate.
Timber, cedar and pinion. Undergrowth, scrub oak and juniper.

Survey of Part (Completion) of
the West boundary of Township 14 North, Range 4 East

chains

- North, on true line, on W. bdy. of sec. 30.
Over mountainous land, thru scattering timber and dense undergrowth.
Descend 150 ft. over E. and NE. slopes.
- 11.50 Wash, course NW.
Ascend 70 ft. over SW. slope.
- 14.50 Top of white spur, bears NW.
Descend 200 ft. over steep NE. slope.
- 25.50 Bottom of gulch, 100 lks. wide, course E., containing a stream of clear water, 3 lks. wide.
Ascend 212 ft. over SE. slope.
- 38.40 Top of rocky spur, bears NE.
Descend 60 ft. over NW. slope to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 30 only, marked on brass cap

| $\frac{1}{4}$ S30

1927

from which

- A pinion, 10 ins. in diam., bears N. $72\frac{1}{4}^{\circ}$ E., 170 lks. dist., marked $\frac{1}{4}$ S30 BT
- A pinion, 6 ins. in diam., bears N. $38\frac{1}{2}^{\circ}$ E., 170 lks. dist., marked $\frac{1}{4}$ S30 BT

- 43.80 Descend 160 ft. over NW. slope.
Bottom of ravine, course NE.
Ascend 55 ft. over SE. slope.
- 45.00 Descend 105 ft. over NE. slope.
- 55.86 Bottom of ravine, course E.
Ascend 132 ft. over SE. slope.
- 65.00 Top of rocky spur, bears E.
Descend 140 ft. over N. slope.
- 68.50 Bottom of ravine, course NE.
Ascend 60 ft. over SE. slope.
- 74.00 Top of spur, bears NE.
Descend 145 ft. over NW. slope to
- 80.00 Drain, course NW. near head. Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bedrock, supported in a mound of stone, for cor. of secs. 19 and 30 only, marked on brass cap

T14N

| S19

| S30

| R4E

1927


from which

- A pinion, 6 ins. in diam., bears N. $36\frac{1}{2}^{\circ}$ E., 61 lks. dist., marked T14N R4E S19 BT
- A pinion, 8 ins. in diam., bears S. 5° E., 235 lks. dist., marked T14N R4E S30 BT

Land, mountainous.
Soil, rocky, 3rd and 4th rate.
Timber, oak, pinion and cedar.
Undergrowth, scrub oak and cedar.

Survey of Part (Completion) of
the West boundary of Township 14 North., Range 4 East.

Chains	North on true line on W. bary of sec. 19.
	Ascend 11 ft. over SW. slope over stony mountainous land thru. scattering timber and dense brush undergrowth.
.60	Top of spur bears W.
	Descend 90 ft. over N. slope.
5.00	Foot of descent in Cherry Wash course E. thence in wash
8.00	Dim road bears E. and W.
10.00	Mouth of ravine course SE.
19.50	Leave Cherry Wash course SE.
	Ascend 260 ft. over SW. slope.
31.35	State Highway from Prescott to Camp Verde Ariz. bears SE. and SW.
34.00	Top of spur bears SE.
	Descend 40 ft. over NE. slope.
38.00	Sand wash course SE.
	Ascend 60 ft. over SW. slope. to
40.00	Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for $\frac{1}{4}$ sec. cor. of sec. 19 only, marked on brass cap



1927

from which

	A pinion 6 ins. in diam. bears N81 $\frac{1}{2}$ °E. 183 lks. dist., marked $\frac{1}{4}$ S19 BT.
	A juniper 8 ins. in diam. bears S64 $\frac{1}{2}$ °E. 64 lks. dist., marked $\frac{1}{4}$ S19 BT.
	Ascend 40 ft. over SE. slope
41.96	Wire fence bears NW. and SE.
43.00	Top of spur bears SE.
46.00	Descend 136 ft. over NE. slope.
52.00	Ravine course E.; A spring bears W. 4.00 chs. dist.
	Ascend 127 ft.
56.60	Top of gravel spur bears E.
	Descend 186 ft. over N. slope.
67.50	Sand wash course NE.
	Ascend over SE. slope.
71.20	Top of spur bears E.; Wire fence along top of same bears NE. and SW.
	Descend over N. slope.
74.00	Ravine course E.
	Ascend 80 ft. over S. slope.
80.00	Set an iron post 3 ft. long, 2 ins. in diam. 23 ins. in the ground for cor. of secs. 18 and 19, T14N., R4E., only, marked on brass cap



1927

from which

A palo verde 8 ins. in diam. bears N79°E. 137 lks. dist., marked T14N., R4E., S18 BT.
 A juniper 8 ins. in diam. bears S58 $\frac{1}{2}$ °E. 37 lks. dist., marked T14N., R4E., S19 BT.

Land, mountainous.
 Soil, stony 3 rd. rate.
 Timber, oak, juniper and pinion.
 Undergrowth, oak, and juniper brush.

the West boundary of Township 14 North., Range 4 East.

Chains North on true line on W.bdry. of sec.18.
Ascend 18 ft. over SE. slope over stony mountainous
land, thru scattering timber and dense undergrowth.

1.00 Top of spur bears E.
Descend 156 ft. over NW. slope.

7.30 Sand wash course NE.
Ascend over SE. slope.

17.00 Top of low spur bears NE.
Descend 70 ft. over NW. slope.

25.00 Sand wash course NE.
Ascend 40 ft. over SE. slope.

27.00 Top of spur bears NE.
Descend 40 ft. over NW. slope.

30.00 Sand wash course NE.
Ascend 46 ft. over SE. slope.

37.00 Top of low spur bears E.
Descend over N. slope.

39.60 Sand wash 6 lks. wide 4 ft. deep course SE.
Ascend 26 ft. over SW. slope.

40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the
ground for $\frac{1}{4}$ sec. cor. of sec.18 only., marked on
brass cap

$\frac{1}{4}$ S18

1927

from which

A juniper 12 ins. in diam. bears N24 $\frac{1}{2}$ °E. 274 lks. dist.,
marked $\frac{1}{4}$ S18 BT.

A juniper 8 ins. in diam. bears N11°E. 192 lks. dist.,
marked $\frac{1}{4}$ S18 BT.

42.50 Top of spur bears NE. thence over level land on spur.

47.00 Descend 40 ft. over N. slope.

50.00 Wash course E.
Ascend 46 ft. over S. slope.

56.00 Top of spur bears NE. thence over nearly level land on
top of spur.

62.00 Descend over N. slope. 40 ft.

64.00 Sand wash course NE.
Ascend 40 ft. over SE. slope.

68.00 Top of spur bears NE.
Descend 102 ft. over NW. slope.

75.00 Foot of descent. enter rolling land slopes E.
Leave timber bears E. and W.

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in
the ground for cor. of secs. 7, and 18. T14N., R4E.
only, marked on brass cap

T14N

S7

S18

R4E

1927

Deposit a marked stone at base of post.

Land, rolling and mountainous.
Soil, stony 3 rd. and 4 th. rate.
Timber, oak, juniper, and pinion.
Undergrowth, oak, palo verde, and greasewood brush.

Survey of Part (Completion) of

the West boundary of Township 14 North., Range 4 East.

BOOK 8801

Chains

North on true line on W. bdry. of sec.7.
 Over rolling sandy land, thru mesquite brush undergrowth.
 4.50 Sand wash 5 lks. wide 4 ft. deep course NE.
 9.00 Sand wash 4 lks. wide 3 ft. deep course NE.
 12.70 Sand wash 50 lks. wide 3 ft. deep course E.
 14.50 Sand wash 30 lks. wide 10 ft. deep course SE.
 15.20 Old road bears E. and W.
 18.00 Leave rolling land bears E. and W.; enter hilly land.
 Ascend 155 ft. over S. slope.
 24.00 Top of hill bears E. and W.
 Descend 125 ft. over N. slope.
 33.50 Sand wash course NE.; leave hilly land bears NE. and SW.
 Enter rolling sandy land.
 37.00 Old road bears NE. and SW.
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the
 ground for $\frac{1}{4}$ sec. cor. of sec.7 only., marked on
 brass cap

| $\frac{1}{4}$ S 7

1927

45.40 Raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high E. of cor.
 52.50 Sand wash 30 lks. wide course NE.
 Sand wash 20 lks. wide 2 ft. deep course NE.
 Ascend 34 ft. over SE. slope.
 55.50 Point of hill slopes E.
 Descend 70 ft. over NE. slope.
 62.00 Foot of descent, enter rolling land slopes E.
 62.10 Old road bears NE. and SW.
 70.00 Sand wash course E.
 73.89 Intersect the SE. side line, (4-5) of Forest Homestead,
 Survey No. 329 at a point 12.12 chs. N70°20'E.
 of cor. No. 5 thereof. Thence across patented H.E.S. No. 329.
 74.00 Wire fence bears E. and W.
 79.00 A vacant frame house bears W. 7.00 chs. dist.
 79.10 Road bears E. and W. 7.00 chs. dist.
 86.60 Wire fence bears E. and W.
 99.34 Wire fence bears N. 60° E. and S. 60° W.
 100.33 Intersect the NW. side line (6-1-2) of Forest Homestead, Survey
 No. 329 at a point 20.99 chs. N70°22'E. of cor.
 No. 6 thereof.; Leave patented H.E.S. No. 329.
 101.38 Intersect the cor. of secs. 6 and 7, reestablished by the
 U.S. Forest Service, which is a granite stone
 8x8x, 2 ins. above ground marked with 1 notch on
 N. and 5 notches on S. edges and witnessed by a
 mound of earth W.; Reconstruct this cor. as
 follows;
 Alongside of the stone cor. Set an iron post 3 ft. long,
 2 ins. in diam. 27 ins. in the ground for
 the cor. of secs. 6 and 7. T14N., R4E. only,
 marked on brass cap

T14N
 S6
 S7
 R4E

1927

from which

A mesquite 8 ins. in diam. bears N9 $\frac{1}{2}$ °E. 196 lks. dist.,
 marked T14N., R4E., S6 BT.
 A mesquite 4 ins. in diam. bears S44 $\frac{1}{2}$ °E. 117 lks. dist.,
 marked T14N., R4E., S7 BT.

Survey of Part (Completion) of
the West Boundary, of Township 14 North., Range 4 East.

Chains

Land, rolling.
Soil, gravelly and stony 3 rd. rate.
Timber, scattering mesquite and oak.
Undergrowth, mesquite, oak, and greasewood brush.

Resurvey of Part of the boundaries of
the Camp Verde Military Reservation (Abandoned)

15
BOOK 8851

The boundaries of the Camp Verde Military Reservation were surveyed and its corners established in 1876 by engineers of the U.S. War Department. The following year, 1877, C.B. Foster, U.S.D.S., retraced the North boundary of the Reservation and surveyed a part of the Subdivision lines of T.14 N., R.4 E., and in 1892 D. Drummond, U.S.D.S., Resurveyed the North and West boundaries of the reservation and subdivided that portion of T.14 N., R4 E. lying within the Reservation. No other retracement or resurvey of the North and West boundaries is of record:

The following notes describe a Resurvey of part of the North boundary and all of the West boundary of the Camp Verde Military Reservation (Abandoned).

Retracement for Resurvey

Begin at the North cor. (No. 3) of the Camp Verde Military Reservation, hereinafter described

Thence

S. 62° 34' W., (record course) on a random line, on part of the N. bdry. of Reservation (line 2-3).

154.62 Fall 9 lks. N 27° 28' W. of the NW. cor. (No. 2) of the Reservation, hereinafter described.

True course and dist. of line 2-3 of N. bdry. of the Camp Verde Military Reservation are therefore, N 62° 32' E., 154.62 chs.

Thence

S. 23° 16' E. (record course) on a random line, along W. bdry. of Reservation (line 1-2)

404.62 Fall 98 lks. S 66° 44' W. of the SW. cor. (No. 1) of the Reservation, hereinafter described.

True course and dist. of the West boundary of the Camp Verde Military Reservation are, therefore N 23° 24' W., 404.62 chs.

Resurvey

Begin at the SW. cor. (No. 1) of the Camp Verde Military Reservation, which is a cedar post 6 ins. sq. projecting 12 ins. above ground, firmly set, dimly marked CVMR on NE. face. No cor. accessories.

Thence

N. 23° 24' W., on true line, on West boundary of Camp Verde Military Reservation.

Over level meadow land in Verde River valley.

14.42 Wire fence bears E. and W.

19.62 Wire fence bears N 10° E. and S 10° W.; Leave meadow land bears NE. and SW.

19.82 Road to Camp Verde Ariz. bears N 10° E. and S 10° W.

Leave bottom land bears NE. and SW. and enter stony hilly land.

Ascend 56 ft. over SE. slope.

21.22 Irrigation ditch 8 lks. wide course SW.

23.45 Top of rocky spur bears E.

Descend 22 ft. over NW. slope.

34.12 Rocky wash 10 lks. wide course E.

Ascend over rolling stony land.

37.97 Road bears E. and W.

Resurvey of Part of the boundaries of
the Camp Verde Military Reservation (Abandoned).

Chains	
39.78	Wire fence bears E. and W.
40.27	Road to Camp Verde bears E. and W.
41.37	Wash 20 lks. wide 15 ft. deep course N70°E.
47.67	Old wire fence bears N. and S. Ascend 68 ft. over S. slope.
58.12	Electric Power line bears N30°E. and S30°W. Transformer Station bears S30°W. about 18.00 chs. dist.
70.97	Top of spur bears W. Descend over N. slope.
73.32	Ravine course W. Ascend 46 ft. over S. slope.
77.62	Top of ridge bears E. and W. Descend over N. slope. 186 ft.
91.12	Foot of descent in S. edge of flat bears E. and W.
93.10	Wash 40 lks. wide course E.
95.12	Old road bears E. and W.
97.62	Wash 5 lks. wide course E. Ascend 46 ft.
103.12	Top of spur bears W. Descend 10 ft.
105.62	Ravine course S. Ascend 214 ft.
118.12	Top of steep ascent on ridge bears E. and W., thence over rolling land on top of ridge
121.62	Descend 198 ft. over N. slope.
125.90	Intersect the S. bdy. of T14N., R4E. at a point 7 lks. East of the closing cor. of secs. 1 and 36, which is a malapai stone 12x6x, 12 ins. above ground firmly set, marked CC CVMR on E. face, and witnessed by a mound of stone E.
131.62	Foot of slope, leave hilly land bears E. and W. Enter rolling land and scattering undergrowth.
134.02	Old road bears E. and W.
135.12	Sand wash 30 lks. wide 20 ft. deep course E.
140.70	Sand wash 25 lks. wide 37 ft. deep course E. Ascend 40 ft. over S. slope.
142.87	Top of ascent, thence over rolling land.
155.62	Descend 12 ft. over N. slope
158.95	Sand wash 10 lks. wide course NE. Ascend 12 ft. over SE. slope.
161.62	Top of spur bears E. Descend 46 ft. over N. slope.
173.62	Foot of steep slope bears E. and W.
180.87	Sand wash course E. Ascend 59 ft. over S. slope.
188.97	Top of ridge bears E. and W.; Road on ridge bears E. and W. Descend 48 ft. over N. slope.
193.46	Sand wash course NE. Ascend 27 ft. over SE. slope.
197.85	Point of intersection of subdivision line bet. secs. 35 and 36, T14N., R4E. Closing cor. of said secs. reestablished at this point as hereinafter de- scribed. Original closing cor. of said secs. hereinafter described bears S1°58'W., 50 lks. dist.
201.62	Top of spur bears NE. Descend 50 ft. over N. slope.
207.02	Sand wash 15 lks. wide course NE. Ascend 45 ft.
212.62	Top of ascent on ridge bears E. and W. Descend gradually
213.15	Point of intersection of subdivision line bet. secs. 26 and 35, T14N., R4E. Closing cor. of said secs. reestablished at this point as hereinafter de- scribed. Original closing cor. of said secs. hereinafter described bears S89°50'W., 22 lks. dist.
218.12	Sand wash course E.
222.17	Road bears N60°E. and S60°W.
229.12	Sand wash 10 lks. wide 16 ft. deep course E.
240.27	Sand wash 20 lks. wide course NE.
245.68	Rocky wash 10 lks. wide 20 ft. deep course N60°E.

Resurvey of Part of the boundaries
of the Camp Verde Military Reservation (Abandoned)

BOOK 3851

Chains	
258.62	Ascend 75 ft. over SE. slope Top of spur bears E.
262.14	Descend 42 ft. over N. slope Dry gulch 10 lks. wide 4 ft. deep course N60°E. Ascend 65 ft.
276.62	Top of ascent on point of spur bears E. Descend 147 ft. over NW. slope.
281.12	South bank of gulch; descend steep N. slope.
283.61	Sand wash 25 lks. wide course N70°E. Ascend 76 ft. over SE. slope.
293.12	Top of N. bank of sand wash bears NE. and SW. thence over rolling stony land.
295.07	Old road bears NE. and SW.
299.87	Point of intersection of subdivision line bet. secs. 23 and 26, T14N., R4E.; Closing cor. of said secs. reestablished at this point as hereinafter described. Original closing cor. of secs. 23 and 26, hereinafter described, bears S89°20'W, 17 lks. dist.
305.79	Sand wash 15 ft. deep course N60°E.
317.89	Sand wash 10 lks. wide 19 ft. deep course NE. Ascend 19 ft. over SE. slope.
319.12	Top of hill bears NE. and SW. Descend 15 ft. over N. slope.
320.12	Sand wash 25 lks. wide course NE. Ascend 26 ft. to
324.62	South edge of flat bears E. and W. thence over nearly level land.
345.82	Sand wash 10 lks. wide at N. edge of flat, course NE.
361.02	Gulch 10 lks. wide 4 ft. deep course N60°E.
380.12	Sand wash 20 lks. wide 4 ft. deep course N50°E.
387.62	Point of intersection of subdivision line bet. secs. 22 and 23, T14N., R4E.; Closing cor. of said secs. reestablished at this point as hereinafter described. Original closing cor. of secs. 22 and 23, hereinafter described bears S. 2°52'W, 61 lks. dist.
388.00	Point of intersection of the subdivision line bet. secs. 15 and 22, T14N., R4E.; Closing cor. of said secs. reestablished at this point as hereinafter described. Original closing cor. of secs. 15 and 22, hereinafter described bears West 30 lks. dist.
392.22	Sand wash 10 lks. wide 2 ft. deep course E. Ascend gradually over S. slope.
404.62	Intersect the reestablished NW. cor. (No. 2) of the Camp Verde Military Reservation, which is a granite stone 12x12x, 12 ins. above ground, firmly set, marked C V M R No. 2 on SE. face. Land level rolling, and hilly. Soil, sandy, gravelly, and stony. 2nd. and 3rd. rate. Timber, scattering oak, cedar, and juniper. Undergrowth, oak, greasewood and crucifixion thorn.

From the NW. cor. (No. 2) of the Reservation,
N. 62°32'E., on true line, on line 2-3 of N. bdy. of Camp Verde Mil. Reservation.
Over rolling gravelly mesa land, thru scattering undergrowth.

8.69	Point of intersection of subdivision line bet. secs. 14 and 15, T14N., R4E.; Closing cor. of said secs. reestablished at this point as hereinafter described.
9.40	Center of State Highway from Camp Verde to Jerome Arizona bears NW. and SE.
19.48	Sand wash 10 lks. wide 26 ft. deep course E. Ascend 26 ft.

Resurvey of Part of the boundaries of
the Camp Verde Military Reservation (Abandoned)

Chains

- 19.96 Telephone line bears N40°W. and S40°E.
 29.00 Top of hill bears E. and W.
 Descend 93 ft. over E. slope.
 31.18 Telephone line bears E. and W.
 32.88 A point in Gulch 30 lks. N. of cor. of wire fence bears
 N60°E. and S.
 Ascend 24 ft. over SW. slope.
 42.50 A corral bears N. 1.00 chain dist.
 43.75 Top of spur bears SE.
 Descend 29 ft. over NE. slope.
 49.75 Road bears NE. and SW. at foot of descent in the Verde
 River bottom., bears NW. and SE.
 Leave rolling mesa land and enter level sandy bottom land.
 59.75 A frame house un occupied bears S. about 250 lks. dist.
 68.80 Wire fence bears N60°E. and S60°W.
 78.10 A frame house on Right bank of the Verde River bears
 N. 200 lks. dist.
 85.70 A frame house bears S. about 100 lks. dist.
 88.60 Intersect the Right bank of the Verde River 30 ft. high
 bears NW. and SE. thence over stony river bed
 water clear 2 ft. deep.
 121.00 Leave water.
 151.80 Intersect the Left bank of the Verde River bears NW. and
 SE.
 Ascend 30 ft. over steep bluffs.
 152.20 Irrigating ditch 8 lks. wide course S30°E.
 152.50 Top of bluff bears NW. and SE., thence over rolling land.
 154.62 Intersect the North cor. (No. 3) of the Camp Verde Military
 Reservation, which is a post set in a mound of
 stone, Marks almost obliterated.

Land, level and rolling.
 Soil, sandy and stony 2nd. and 3 rd. rate.
 No timber.
 Undergrowth, graseood and sage brush.

Resurvey of Part of the Subdivision lines of Township 14 North., Range 4 East

Chains

The Subdivision lines of secs.1 to 6 and 9 to 11 incl. and all of secs.12,13,and 14.lying outside the Camp Verde Military Reservation in T14N.,R4E. were surveyed in 1877 by C. Burton Foster,U.S. Deputy Surveyor.

In 1892,D.Drummond,U.S.Deputy Surveyor,resurveyed the boundaries of the Camp Verde Military Reservation and subdivided all of that portion of T14N.,R4E.lying within the Reservation,closing his lines on the boundaries of the Reservation and retraced the subdivision lines bet. secs. 13 and 14 and 14 and 15 surveyed by Deputy Foster outside of the Reservation.

In 1915,R.P.A.Johnson,Surveyor Draftsman,of the U.S. Forest Service retraced and resurveyed the subdivision lines bet.secs.5 and 6,secs.6 and 7,and W.½ bet. secs.5 and 8,in connection with the survey of Forest Homesteads Nos.329 and 330. No other retracement or resurvey of any of the subdivision lines is of record.

The following notes describe a Resurvey of Part of the subdivision lines in T14N.,R4E.adjacent to the unsurveyed portion of the township.

Retracement for Resurvey

From the cor. of secs.25,26,35,and 36,hereinafter described a flag at original closing cor.of secs. 35 and 36 on W.bdry. of the Camp Verde Military Reservation is plainly visible,therefore run for said flag.

14.61 S.1°58'W., on a random line bet. secs.35 and 36 Intersect original closing cor. of secs.35 and 36 on W. bdry. of the Camp Verde Military Reservation hereinafter described.

True course and dist.of line from the cor. of secs.25,26, 35,and 36 to closing cor. are therefore S1°58'W., 14.61 chs.

From the cor. of secs.25,26,35,and 36 ,a flag held on original closing cor. of secs.26 and 35 on W.bdry.of the Camp Verde Military Reservation is plainly visible,therefore,run for said flag

6.78 S.89°50'W., on a random line,bet. secs.26 and 35. Intersect original closing cor. of secs.26 and 35,herein- after described.

True course and dist.of line from cor. of secs.25,26,35, and 36 are,therefore,S89°50'W.,6.78 chs.

From the cor. of secs. 25,26,35,and 36,

N.1°48'E., (record course)on a random line,bet.secs.25 and 26.

40.00 Diligent search in this vicinity fails to reveal any trace of original ¼ sec. cor.,therefore ,continue random line and measurement and at

80.52 Fall 9.9 lks. N:88°12'W.of original cor. of secs.23,24,25, and 26,which is a malpai stone 12x6,x10 ins. . above ground,firmly set,marked with 1 notch on E and 2 notches on S.edges.and witnessed by a mound of stone 'W.

Resurvey of Part of the Subdivision lines of Township 14 North., Range 4 East

Chains	True course and dist. of line bet. secs. 25 and ² / ₃₆ are, therefore, N 1°52'E., 80.52 chs.

	From original cor. of secs. 23, 24, 25, and 26,
	West (record course), on a random line, bet. secs. 23 and 26
40.02	(E ¹ / ₂) Fall 91 lks. N. of original ¹ / ₄ sec. cor. hereinafter described. True course and dist. of E ¹ / ₂ of line bet. secs. 23 and 26 are therefore, S88°42'W., 40.03 chs.
	Thence
	West (record course), on a random line, bet. secs. 23 and 26
3.61	(W ¹ / ₂) Fall 4 lks. N. of original closing cor. of secs. 23 and 26 on W. bdry. of the Camp Verde Military Reservation hereinafter described. True course and dist. of line bet. secs. 23 and 26 (from original ¹ / ₄ sec. cor. to original closing cor. on W. bdry. of Camp Verde Military Reservation are therefore, S89°20'W., 3.61 chs.

	From original cor. of secs. 14, 15, 22, and 23, hereinafter described,
	S. 1°48'W. (record course), on a random line, bet. secs. 22 and 23.
0.95	Intersect original closing cor. of said secs. on W. bdry. of the Camp Verde Military Reservation, hereinafter described. True course and dist. of line bet. secs. 22 and 23 from original cor. of secs. 14, 15, 22 and 23 to original closing cor. of said secs. on W. bdry. of said Reservation are therefore, S. 1°48'W., 95 lks.

	From original cor. of secs. 14, 15, 22, and 23, hereinafter described,
	West (record course), on a random line, bet. secs. 15 and 22
0.45	Intersect original closing cor. of said secs. 15 and 22 on W. bdry. of the Camp Verde Military Reservation, hereinafter described. True course and dist. of line bet. secs. 15 and 22 from original cor. of secs. 14, 15, 22 and 23 to original closing cor. of said secs. on W. bdry. of Camp Verde Military Reservation are therefore, West, 45 lks..

	From original cor. of secs. 14, 15, 22, and 23, hereinafter described,
	N. 2°48'E. (record course), on a random line, bet. secs. 14 and 15.
19.24	(Record dist.) Diligent search in this vicinity fails to reveal any trace of original closing cor. of secs. 14 and 15 on the N. bdry. of the Camp Verde Military Reservation.
44.07	(Record dist.) Diligent search in this vicinity fails to reveal any trace of original ¹ / ₄ sec. cor., therefore
	Continue random line and measurement and at
89.08	Fall 5.1 lks. N. 87°12'W. of original cor. of secs. 10, 11, 14 and 15, hereinafter described. True course and dist. of line bet. secs. 14 and 15 are therefore, N. 2°50'E., 89.08 chs.

Resurvey of Part of the Subdivision lines of Township 14 North., Range 4 East

Chains	From the cor. of secs.10,11,14,and 15.hereinafter described,
39.55	West (record course), on a random line, bet. secs.10 and 15, (E $\frac{1}{2}$) Fall 109 lks. S.of original. $\frac{1}{4}$ sec. cor.,hereinafter described. True course and dist. of E. $\frac{1}{2}$ of line bet. secs.10 and 15 are therefore, N.88°25'W,39.57 chs. Thence West (record course), on a random line, bet. secs.10 and 15, (W $\frac{1}{2}$)
40.07	Fall 98 lks. S.of original.cor. of secs.9,10,15,and 16, hereinafter described. True course and dist. of W. $\frac{1}{2}$ of line bet. secs.10 and 15 are therefore, N.88°36'W,40.08 chs.

	From original. cor. of secs.9,10,15,and 16,hereinafter described,
40.00	West (record course), on a random line, bet.secs.9 and 16, (Record dist.) Diligent search in this vicinity fails to reveal any trace of original. $\frac{1}{4}$ sec. cor.;Set temp. $\frac{1}{4}$ sec. cor.
80.00	Continue random line and measurement and at (Record dist.) Diligent search in this vicinity fails to reveal any trace of original. cor. of secs.8,9, 16,and 17.; Set temp.cor. (A) of secs.8 and9:

	From original cor. of secs.4,5,8,and 9,hereinafter described,
40.00	South (record course), on a random line, bet.secs.8 and 9 (Record dist.) Diligent search in this vicinity fails to reveal any trace of original $\frac{1}{4}$ sec. cor.;Set temp. $\frac{1}{4}$ sec. cor.
80.00	Continue random line and measurement and at (Record dist.) Diligent search in this vicinity fails to reveal any trace of original. cor. of secs.8,9, 16,and 17.; Set temp.cor.(B) of secs.8 and9.
83.03	Continue line and measurement Intersect E. and W. random line at a point 10 lks.E.of temp.cor. (A),of secs.8 and9. The point for reestablishment of the cor. of secs. , , 8, and 9, is therefore at 3.03 chs.due North of temp.cor.(A) and 10 lks.due West of temp.cor:(B) of said secs. The resulting true bearing and length of the line bet. secs.9 and 16 are therefore N.87°50'W.80.06 chs., and of the line bet. secs.8 and 9.,N 0°4' E. 80.00 chs.

	From original. cor. of secs. 4,5,8,and 9.,hereinafter described,
42.37	West (record course),on a random line, bet. secs.5 and 8. (E $\frac{1}{2}$). Fall 361 lks. S. of original. $\frac{1}{4}$ sec. cor.hereinafter described. True course and dist.of E. $\frac{1}{2}$ of line bet. secs.5 and 8 are therefore, N.85°08'W,42.52 chs.

Resurvey of Part of the Subdivision lines of Township 14 North., Range 4 East


Chains	
	Thence N 87°43'W. (record course), on a random line, bet. secs. 5 and 8, (W $\frac{1}{2}$)
40.04	Intersect the reestablished cor. of secs. 5, 6, 7 and 8, hereinafter described. True course and dist. of W. $\frac{1}{2}$ of line bet. secs. 5 and 8 are therefore, N. 87°43'W., 40.04 chs.

	From the reestablished cor. of secs. 5, 6, 7 and 8, hereinafter described,
	N 89°20'W. (record course), on a random line bet. secs. 6 and 7, (E $\frac{1}{2}$)
33.44	Intersect closing cor. on west end line (2-3-4) of Forest Homestead Entry Survey No. 330, hereinafter described.
	Continue random line and measurement.
40.00	Intersect the original $\frac{1}{2}$ sec. cor. of secs. 6 and 7, hereinafter described. True course and dist. of E. $\frac{1}{2}$ of line bet. secs. 6 and 7 are therefore, S. 89°20'E., 40.00 chs.
	Thence N 88°43'W. (record course), on a random line, bet. secs. 6 and 7 (W $\frac{1}{2}$)
35.95	Intersect closing cor. on N. side line (6-1-2) of Forest Homestead Entry Survey No. 329, hereinafter described.
	Continue random line and measurement.
38.71	Intersect the reestablished cor. of secs. 6 and 7 on W. bdy of Tp. hereinbefore described. True course and dist of W. $\frac{1}{2}$ of line bet. secs. 6 and 7 are therefore, S. 88°43'E., 38.71 chs.

RESURVEY

The original cor. of secs. 25, 26, 35, and 36, T14N., R4E. is a volcanic stone 8x8, x12 ins. above ground, firmly set, marked with 1 notch on E. and S. edges, and witnessed by remains of earth mound and four pits.

	Thence S 1°58'W., on true line, bet. secs. 35 and 36 (inside C.V.M.R.) Over rolling sandy land in flat, thru scattering grease-wood brush undergrowth.
2.80	Sand wash 5 lks. wide 2 ft. deep course E.
5.00	Leave rolling land bears NE. and SW.; enter hilly land. Ascend 46 ft. over NE. slope.
10.00	Top of hill bears NE. and SW. Descend gradually over S. slope.
14.11	Intersect the W. bdy. of the Camp Verde Military Reservation at a point 206.77 chs. S 23°24'E. of the NW. cor. (No. 2) of the Reservation. At this point, Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the ground for reestablished closing cor. of secs. 35 and 36., marked on brass cap



Raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high S. of cor.

Resurvey of Part of the Subdivision lines of Township 14 North., Range 4 East


Chains

14.61 Continue line and measurement from cor. of secs. 25, 26, 35, and 36.
 Intersect original closing cor. of secs. 35 and 36, of record as being on W. bdy. of C.V.M.R., which is a malpai stone 14x10x, 12 ins. above ground firmly set, marked CVMR CC on E. face. No cor. accessories.
 Change this cor. to a witness point by prefixing the letters "WP" on the stone.

Land level, rolling, and hilly.
 Soil, sandy and stony 3 rd. rate.
 Timber, none.
 Undergrowth, greasewood and sagebrush.

From original. cor. of secs. 25, 26, 35, and 36,

1.40 S. 89°50'W., on true line, bet. secs. 26 and 35 (inside C.V.M.R.)
 6.00 Over rolling sandy land in flat, thru scattering greasewood brush undergrowth.
 Leave flat bears NW. and SE. Enter rolling hilly land.
 6.56 Ascend 54 ft. over NE. slope.
 Top of slope, thence over rolling mesa land.
 Intersect the W. bdy. of the Camp Verde Military Reservation at a point 191.47 chs. S. 23°24'E. of the NW. cor. (No. 2) of the Reservation.; At this point, Set an iron post 3 ft. long, 2 ins., in diam. 27 ins. in the ground for reestablished closing cor. of secs. 26 and 35, marked on brass cap



1927

6.78 Raise a mound of stone 2 ft. base, 1 1/2 ft. high W. of cor.
 Continue line and measurement from the cor. of secs. 25, 26, 35, and 36.
 Intersect original closing cor. of secs. 26 and 35, of record as being on W. bdy. of C.V.M.R., which is a limestone 12x6, x6 ins. above ground, firmly set, marked CVMR CC on E. face. No cor. accessories.
 Change this cor. to a witness point as follows;
 Prefix the letters "WP" to other marks on stone.

Land, level, rolling, and hilly.
 Soil, stony 3 rd. rate.
 Timber, none.
 Undergrowth, sage and greasewood brush.

From original. 1/4 sec. cor. of secs. 23 and 26, which is a malpai stone 12x6, 12 ins. above ground, firmly set, marked 1/4 on N. face and witnessed by a mound of stone N.


S. 89°20'W., on true line, bet. secs. 23 and 26 (inside C.V.M.R.)
 Over rolling sandy land, thru scattering mesquite and

Resurvey of Part of the Subdivision lines of Township 14 North., Range 4 East

Chains

3.44

catclaw brush undergrowth.
Intersect the W.bdry.of the Camp Verde Military Reserva-
tion at a point 104.75 chs. S23°24'E.of the
NW.cor.(No.2)of the Reservation.;At this point
Set an iron post 3 ft. long, 2 ins. in diam.27 ins. in
the ground for reestablished closing cor. of
secs.23 and 26,marked on brass cap




1927

3.61

Raise a mound of stone 2 ft. base, 1½ ft. high W.of cor.
Continue line and measurement from original ¼ sec. cor.of
secs.23 and 26.
Intersect original closing cor.of secs.23 and 26,of record as being
on W.bdry.of C.V.M.R,which is a malpai stone 12x6x
12 ins. above ground,firmly set,marked CVMR CC
on E.face. No cor. accessories
Change this cor. to a witness point as follow; Prefix the
letters"WP" to other marks on stone.

Land,rolling.
Soil,sandy and stony,3 rd. rate.
Timber,none.
Undergrowth,greasewood,catclaw and mesquite brush.


The original cor.of secs.14,15,22, and 23 is a granite boulder
10x6x,12 ins. above ground,marked with 2 notches
on E. and 3 notches on S.edges. No cor.access-
ories.;Reconstruct this cor.as follows;
Alongside the boulder, set an iron post 3 ft. long,
2 ins. in diam.28 ins. in the ground for
cor. of secs. 14,15,22 and 23, marked on
brass cap



1927

0.35

Raise a mound of stone 2 ft. base, 1½ ft. high W.of cor.
Thence,
South,on true line,bet. secs.22 and 23 (inside C.V.M.R.)
Over rolling sandy land thru.scattering sagebrush under-
growth.
Intersect the W.bdry. of the Camp Verde Military Reserva-
tion at a point 17.00' chs.S 23°24'E.of the NW.cor.
(No.2)of the Reservation. At this point,
Set an iron post 3 ft. long,2 ins. in diam.28 ins.in the
ground for reestablished closing cor. of secs.
22 and 23.,marked on brass cap



1927

Resurvey of Part of the Subdivision lines of Township 14 North., Range 4 East


Chains

Deposit a marked stone alongside of post.
From this cor. the original closing cor. of secs. 22 and 23,
which is a river boulder 18x18x12 ins., firmly set
and marked CVMR CC on E. face bears S.2°52'W., 61 lks.
dist.; Obliterate marks on stone and destroy all
evidence of the cor.

Land, rolling.
Soil, sandy 3 rd. rate.
Timber, none.
Undergrowth, greasewood brush.

0.15

From original cor. of secs. 14, 15, 22 and 23,
West, on true line, bet. secs. 15 and 22. (inside C.V.M.R.)
Over rolling sandy land, thru scattering undergrowth.
Intersect the W. bdy. of the Camp Verde Military Reserva-
tion at a point 16.62 chs. S. 23°24'E. of the NW. cor.
(No. 2) of the Reservation, hereinbefore described
At this point, Set an iron post 3 ft. long, 2 ins.
in diam. 28 ins. in the ground for reestablished
closing cor. of secs. 15 and 22, marked on brass
cap




Raise a mound of stone 2 ft. base, 1 1/2 ft. high W. of cor.
From this cor. the original closing cor. of same secs.,
as of record as being on C.V.M.R. bdy. bears West:
30 lks. dist. and is monumented by a granite
stone 18x16x12 ins., firmly set, marked CVMR CC on
E. face with trace of pits and mound of earth E.
Obliterate marks on the old stone and destroy
all evidence of the pits and mound.

Land, rolling.
Soil, sandy 3 rd. rate.
Timber, none
Undergrowth, greasewood brush.

19.30

From original cor. of secs. 14, 15, 22 and 23,
N. 2°50'E, on true line, bet. secs. 14 and 15.
Over rolling sandy land, thru scattering undergrowth.
Intersect the N. bdy. of the Camp Verde Military Reserva-
tion at a point 8.69 chs. N. 62°32'E. of the NW. cor.
(No. 2) of the Reservation, hereinbefore described.
At this point, Set an iron post 3 ft. long, 2 ins.
in diam. 27 ins. in the ground for reestablished
closing cor. of secs. 14 and 15, marked on brass
cap



Raise a mound of stone 2 ft. base, 1 1/2 ft. high N. of cor.

Resurvey of Part of the Subdivision lines of Township 14 North., Range 4 East

Chains

Continue line and measurement from the cor. of secs. 14, 15, 22, and 23.

20.18 State Highway from Camp Verde to Jerome, Ariz., bears NW. and SE.

26.50 Wash 10 lks. wide 25 ft. deep course E.


32.98 Old road bears N70°E. and S70°W.

34.87 Telephone line bears NW. and SE.

38.58 Old road bears E. and W.

44.28 Wire fence bears N80°E. and S80°W.

44.54 (Mid-point on line bet. secs. 14 and 15). Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for reestablished $\frac{1}{2}$ sec. cor., marked on brass cap



50.08 Raise a mound of stone 2 ft. base, 1 1/2 ft. high W. of cor. North edge of mesa.; leave rolling land bears E. and W. Enter hilly land

Descend 114 ft. over N. slope.

58.08 Foot of steep descent.; Descend gradually.

62.73 Rocky wash 75 lks. wide course E.

Ascend 17 ft.

65.08 Top of hill bears NE. and SW.

Descend 11 ft. over NW. slope.

69.08 Rocky gulch 8 lks. wide course E.

Ascend 58 ft. over S. slope.

77.08 Top of hill bears NE. and SW.

Descend 48 ft. over NW. slope.


83.01 Gulch course NE.

Ascend 30 ft.

39.08 Intersect original cor. of secs. 10, 11, 14, and 15, which is a malapai stone 14x12x, 12 ins. above ground marked with 2 notches on E. and 4 notches on S. edges, with remains of mound of stone W.

Reconstruct this cor. as follows;

Alongside the stone, set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the ground, for reestablished cor. of secs. 10, 14 and 15, marked on brass cap



Raise a mound of stone 2 ft. base, 1 1/2 ft. high W. of cor.

Land, rolling and hilly.

Soil, gravelly and stone 3 rd. rate.

Timber, none.

Undergrowth, greasewood and sage brush.

N. 88° 25' W., on true line, bet. secs. 10 and 15 (E. 1/2)
Descend 10 ft. over NW. slope over stony hilly land, thru. scattering undergrowth.

9.60 Wash 6 lks. wide course NE.


16.00 Wash 40 lks. wide course NE. thence over bottom land along wash.

28.20 Old road bears NE. and SW.

Resurvey of Part of the Subdivision lines of Township 14 North, Range 4 East

chains
37.60
39.20
39.57


Drain, course NE.
Telephone line, bears NW. and SE.
Intersect original $\frac{1}{4}$ sec. cor. of secs. 10 and 15, which is a granite stone 8x8, 8 ins. above ground, firmly set, and marked $\frac{1}{4}$ on E. face. No accessories.
Reconstruct this cor. monument as follows:
alongside the stone, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 10 and 15, marked on brass cap



Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

Thence,
N. 88° 36' W., on true line, bet. secs. 10 and 15 (W. $\frac{1}{4}$)
Over rolling land, thru scattering undergrowth.

4.00 Wire fence, bears NW. and SE.
4.42 State highway from Camp Verde to Jerome Ariz., bears N. 20° W. and S. 20° E.
7.78 Ditch, bears NW. and SE.
9.00 Store and service station at Aultman, Ariz. bears North about 8.00 chs. dist.
14.80 State highway from Prescott to Jerome Ariz. bears NE. and SW.
15.00 Woven wire fence, bears NE. and SW.
18.30 Descend 23 ft. over NW. slope.
28.00 Foot of descent. Leave rolling and enter level, sandy, bottom land, bears NE. and SW., covered with dense undergrowth.
31.00 Wash, 5 lks. wide, 1 ft. deep, course NE.
37.00 Cherry Wash, 100 lks. wide, 4 ft. deep, course NE.
40.08 Intersect original cor. of secs. 9, 10, 15 and 16, which is a granite stone, 7x7, 10 ins. above ground, loosely set, marked with 3 notches on E. edge and 4 notches on S. edge. No accessories.
Reconstruct this cor. monument as follows:
alongside the stone, set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 9, 10, 15 and 16, marked on brass cap



Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Land, hilly, rolling and level.
Soil, gravelly, 3rd rate.
Timber, none.
Undergrowth, greasewood, sagebrush and scrub mesquite.

1.00 N. 87° 50' W., on true line, on N. bdy. of sec. 16.
Over level, sandy, bottom land, thru dense undergrowth.
Leave bottom land, bears NE. and SW., and enter rolling land.
Ascend 40 ft. over SE. slope to
5.00 Top of bank, bears NE. and SW. Thence over gently rolling NE. slope.
21.80 Wash, course NE.
27.10 Woven wire fence, bears NW. and SE.

Resurvey of Part of the Subdivision lines-Township 14 North, Range 4 East

- chains
31.60 Drain, course NE.
40.03 (Midpoint of S. bdy. of sec.9) Set an iron post, 3 ft.long,
1 in.in diam., 16 ins.in the ground to bedrock,
supported in a mound of stone, for reestablished
 $\frac{1}{4}$ sec. cor. of sec.9 only, marked on brass cap
- $\frac{1}{4}$ S 9
1927
- Raise a mound of stone, 2 ft.base, $1\frac{1}{2}$ ft.high, N.of cor.
- 44.50 (40.00 chs.in departure from NW.cor.of sec.16) Set an
iron post, 3 ft.long, 1 in.in diam., 27 ins.in the
ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 16 only,
marked on brass cap
- $\frac{1}{4}$ S 16
1927
- Raise a mound of stone, 2 ft.base, $1\frac{1}{2}$ ft.high, S.of cor.
- 50.00 Descend gradually over NW. slope.
54.00 Drain, course N.
59.00 Wash, course NE.
71.00 Wash, 25 lks.wide, 2 ft.deep, course N.
80.06 Set an iron post, 3 ft.long, 2 ins.in diam., 27 ins.in
the ground, for reestablished cor. of secs. 8 and
9 only, marked on brass cap
- T14N R4E
S8 | S9
1927
- Raise a mound of stone, 2 ft.base, $1\frac{1}{2}$ ft.high, N.of cor.
- Thence,
West, on true line, continuing measurement.
Over rolling N. slope thru scattering undergrowth.
84.53 (84.47 chs.in departure from NE. cor.of sec.16) Intersect
the subdivision line bet. secs. 16 and 17, surveyed
N.0° 1'W.
The cor.of secs.16 and 17 is reestablished at this point
of intersection as hereinafter described.
- Land, level and rolling.
Soil, sandy and gravelly, 3rd rate.
Timber, none.
Undergrowth, greasewood and scrub mesquite.
-
- From reestablished cor.of secs. 8 and 9.
N.0° 4'E., on true line, bet. secs. 8 and 9.
Over gently rolling land thru scattering timber and
undergrowth.
- 13.70 Drain, course NE.
29.70 Old road, bears NE. and SW.
39.70 Drain, course NE.
40.00 (Midpoint) Set an iron post, 3 ft.long, 1 in.in diam.,
27 ins.in the ground, for reestablished $\frac{1}{4}$ sec.cor.
of secs.8 and 9, marked on brass cap

$\frac{1}{4}$
S8 | S9
1927

BOOK 825


Resurvey of Part of the Subdivision lines-Township 14 North, Range 4 East

chains No bearing trees available.
Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

- 45.07 Old road, bears NE. and SW.
- 67.00 Head of drain, course NE.
- 73.30 Ranch road, bears NE. and SW.
A frame house bears N. 45° W. about 10 chs. dist.
- 77.58 Wash, course NW.

80.00 Intersect original cor. of secs. 4, 5, 8 and 9, which is a volcanic stone 8x14, 12 ins. above ground, loosely set, marked with 4 notches on E. edge and 5 notches on S. edge. No accessories.

Reconstruct this cor. monument as follows:
along side the stone, set an iron post, 3 ft. long, 2 ins. in diam., 18. ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for cor. of secs. 4, 5, 8 and 9, marked on brass cap



1927

No bearing trees available.


Land, gently rolling.
Soil, gravelly, 3rd rate.
Timber, mesquite.
Undergrowth, greasewood and scrub mesquite.

N. 85° 8' W., on true line, bet. secs. 5 and 8 (E. 1/2)
Over gently rolling land, thru scattering timber and undergrowth.

- 0.20 Wash, 10 lks. wide, 6 ft. deep, course NW.
- 11.00 Wash, 40 lks. wide, 4 ft. deep, course NE.
Thence over level land.
- 17.50 Leave level and enter rolling land.
Ascend 50 ft. over SE. slope to
- 24.00 Top of ascent. Thence over N. slope.
- 26.60 Wash, course NE.
Ascend gradually over SE. slope to

42.52 Intersect original 1/4 sec. cor. of secs. 5 and 8, which is a granite stone, 8x12, 12 ins. above ground, loosely set, marked 1/4 on E. face, and witnessed by a small mound of stone N. of cor. No bearing trees.

Reconstruct this cor. monument as follows:
alongside the stone, set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for 1/4 sec. cor. of secs. 5 and 8, marked on brass cap



1927

No bearing trees available.
Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

Thence,
Thence,
N. 87° 43' W., on true line, bet. secs. 5 and 8 (W. 1/2)
Over gently rolling land, thru scattering timber and undergrowth.
Ascend gradually over SE. slope.

- 5.00 Top of low spur, bears NE.

Resurvey of Part of the Subdivision lines-Township 14 North, Range 4 East

chains	Descend 34 ft. over NW. slope.						
13.50	Wash, course N. Thence over N. slope.						
22.00	Leave gently rolling and enter level land, bears NE. and SW.						
24.00	Old road, bears NE. and SW.						
26.00	Wash, 60 lks. wide, 10 ft. deep, course NE.						
34.00	Wash, 100 lks. wide, 15 ft. deep, course N. 60° E.						
40.04	Intersect the reestablished cor. of secs. 5, 6, 7 and 8, which is a granite stone, 6x6, 6 ins. above ground, firmly set, marked with a cross (X) on top, and 5 notches on each of E. and S. edges, and witnessed by four pits, one each, NE., SE., SW. and NW. of cor., and a mound of earth W. Reconstruct this cor. monument as follows: alongside the stone, set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 5, 6, 7 and 8, and for Cor. No. 1 of Forest Homestead Entry Survey No. 330, marked on brass cap						
	<table border="1"> <tbody> <tr> <td>T14N</td> <td>R4E</td> </tr> <tr> <td>S 6</td> <td>S 5</td> </tr> <tr> <td>S 7</td> <td>S 8</td> </tr> </tbody> </table> 1927	T14N	R4E	S 6	S 5	S 7	S 8
T14N	R4E						
S 6	S 5						
S 7	S 8						
	<p>from which</p> <p>A mesquite, 6 ins. in diam., bears N. 59$\frac{1}{2}$° E., 138 lks. dist., marked T14N R4E S5 BT</p> <p>A mesquite, 6 ins. in diam., bears S. 53$\frac{1}{2}$° E., 270 lks. dist., marked T14N R4E S8 BT</p> <p>A mesquite, 6 ins. in diam., bears S. 37$\frac{1}{2}$° W., 93 lks. dist., marked T14N R4E S7 BT</p> <p>A mesquite, 6 ins. in diam., bears N. 55$\frac{1}{2}$° W., 184 lks. dist., marked T14N R4E S6 BT</p> <p>The witness cor. to Cor. No. 1 of H.E.S. No. 330 is 1 lk. W. of above described sec. cor. This W.C. is a granite stone 8x12, 6 ins. above ground, firmly set, and marked WC 1 HES 330</p> <p>Land, gently rolling and level. Soil, sandy and gravelly, 2nd and 3rd rate. Timber, mesquite. Undergrowth, greasewood and scrub mesquite.</p>						
	<p>From the reestablished cor. of secs. 6 and 7, on the W. bdy. of the Tp., hereinbefore described, S. 88° 43' E., on true line, bet. secs. 6 and 7 (W. $\frac{1}{2}$) Over level land, thru scattering undergrowth.</p>						
1.75	Wire fence, bears N. 60° E. and S. 60° W.						
2.76	Intersect closing cor. of secs. 6 and 7 and Cor. No. 1 of Forest Homestead Entry Survey No. 329, which is on the N. side line (6-1-2) of said homestead. This closing cor. and homestead cor. is a granite stone 8x18, 12 ins. above ground, firmly set, marked 1 HES 329 on S. face and CC on W. face, and witnessed by pits, one each, W., NE. and SW. of cor., and mound of earth W. of cor.						
	Thence across patented H.E.S. No. 329.						
12.71	Wire fence, bears NE. and SW.						
13.71	Old road, bears N. and S.						
32.70	Leave level and enter gently rolling land, bears N. & S. Ascend over W. slope.						
34.00	Top of low spur, bears N. Descend gradually over NE. slope to						
38.71	Intersect the original $\frac{1}{4}$ sec. cor. of secs. 6 and 7, which is a granite stone 8x8, 8 ins. above ground, firmly set, marked $\frac{1}{4}$ on E. face, and witnessed by a mound of stone N. of cor. Reconstruct this cor. monument as follows:						

Resurvey of Part of the Subdivision lines-Township 14 North, Range 4 East

chains alongside the stone, set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 6 and 7, marked on brass cap

S 6

S 7
1927

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor. Thence, S. $89^{\circ}20'$ E., on true line, bet. secs. 6 and 7 (E. $\frac{1}{2}$) Over gently rolling land, thru scattering undergrowth. Across patented H.E.S. No. 329. Descend gradually over NE. slope.

6.56 Intersect closing cor. of secs. 6 and 7, Cor. No. 3 of H.E.S. No. 329, and Cor. No. 3 of H.E.S. No. 330, which is a granite stone 12x8, 8 ins. above ground, firmly set, marked 3 HES 329 on W. face, 3 HES 330 on E. face, and CC on NW. face, and witnessed by a mound of earth NW. and three pits, one each, W., NW. and SE. of cor. Thence across patented H.E.S. No. 330.

7.18 Wire fence, bears NW. and SE.

17.00 Wash, course NE. Ascend over NW. slope.

21.00 Low spur, bears NE. Descend over SE. slope.

25.35 Telephone line, bears NW. and SE.

26.00 Foot of descent, bears NE. and SW. Enter level land.

28.35 Electric power transmission line, Fossil Creek to Jerome, Ariz., bears NW. and SE.

35.00 Road, bears NE. and SW.

40.00 Intersect the reestablished cor. of secs. 5, 6, 7 and 8, identical with Cor. No. 1 of H.E.S. No. 330.

Land, level and gently rolling.
Soil, sandy and gravelly, 1st, 2nd and 3rd rate.
Timber, none. Undergrowth, greasewood and scrub mesquite.

Boundaries of Part of Township 14 North, Range 4 East
Latitudes, departures and closing errors.

Line designated	True Course	Dist.	Latitudes		Departures	
			N.	S.	E.	W.
South bdy. of Tp.	West	420.30				420.30
West bdy. of Tp.	North	421.38	421.38			
Subdivision lines	S. $88^{\circ}43'$ E.	38.71		.87	38.70	
	S. $89^{\circ}20'$ E.	40.00		.47	40.00	
	S. $87^{\circ}43'$ E.	40.04		1.59	40.01	
	S. $85^{\circ}8'$ E.	42.52		3.61	42.37	
	S. $0^{\circ}4'$ W.	80.00		80.00		.09
	S. $87^{\circ}50'$ E.	80.06		3.03	80.00	
	S. $88^{\circ}36'$ E.	40.08		.98	40.07	
	S. $88^{\circ}25'$ E.	39.57		1.09	39.55	
	S. $2^{\circ}50'$ W.	69.78		69.69		3.45
Camp Verde Mil. Reserv. bdrs.	S. $62^{\circ}32'$ W.	8.69		4.01		7.71
	S. $23^{\circ}24'$ E.	278.72		255.79	110.69	
Convergency					.28	
Totals			421.38	421.13	431.67	431.55
			421.13		431.55	
Error in latitude			0.25			
Error in departure					0.12	

Survey of Part (Completion) of
the Subdivision lines of Township 14 North, Range 4 East

chains	From original closing cor. of secs. 35 and 36 (14.61 chs. S. 1°58'W. from orig. cor. of secs. 25, 26, 35 and 36) hereinbefore described, as changed to a witness point, continue measurement from said sec. cor., S. 1°58'W., on random line, to obtain length of N. $\frac{1}{2}$ of line bet. secs. 35 and 36, and determine true bearing and length of S. $\frac{1}{2}$ of same sec. line.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.24	Intersect E. and W. line at 83 lks. W. of original cor. of secs. 1, 2, 35 and 36 on S. bdy. of Tp., hereinbefore described.
	The true bearing and length of S. $\frac{1}{2}$ of line bet. secs. 35 and 36 are therefore, N. 0°47'E., 40.10 chs., and the N. $\frac{1}{2}$ of same sec. line will be N. 1°58'E., 40.12 chs.

	From original cor. of secs. 1, 2, 35 and 36, on S. bdy. of Tp., hereinbefore described,
	N. 0°47'E., on true line, bet. secs. 35 and 36 (S. $\frac{1}{2}$)
	Over gently rolling land, thru scattering undergrowth. Ascend slightly over E. slope.
5.24	Wash, 10 lks. wide, course E. Ascend 25 ft. over S. slope.
8.25	Top of low hill, bears E. and W. Descend 30 ft. over N. slope.
12.04	Wash, 8 lks. wide, course E. Ascend 68 ft. over SE. slope.
35.75	Top of hill, bears NE. and SW. Descend 35 ft. over NW. slope to
40.10	(Midpoint in latitude of line bet. secs. 35 and 36) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 35 and 36, marked on brass cap
	$\frac{1}{4}$
	S35 S36
	1927
	Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
	Thence,
	N. 1°58'E., on true line, bet. secs. 35 and 36 (portion of N. $\frac{1}{2}$ outside the Camp Verde Military Reservation)
	Over rolling land, thru scattering undergrowth.
	Descend 37 ft. over NW. slope.
2.41	Wash, course NE. Ascend 27 ft. over SE. slope.
6.11	E. end of top of hill, bears NE. and SW. Descend 34 ft. over NW. slope.
8.90	Wash, 12 lks. wide, course E. Ascend 49 ft. over SW. slope.
15.60	Top of ascent on W. side of hill. Descend 35 ft. over NW. slope.
17.50	Old road, bears E. and W.
20:30	Wash, course NE. Ascend 25 ft. over SE. slope to closing cor.
25.51	Intersect witness point (originally closing cor. of secs. 35 and 36.)
	Continue line and measurement.
26.01	Intersect the reestablished closing cor. of secs. 35 and 36, on W. bdy. of Camp Verde Military Reservation, hereinbefore described.
	The remainder of the N. $\frac{1}{2}$ of line bet. secs. 35 and 36, resurveyed as hereinbefore described, is within the Camp Verde Military Reservation (Abandoned).
	Land, rolling and hilly. Soil, sandy and gravelly, 3rd rate. Timber, none. Undergrowth, greasewood and scrub oak.


Survey of Part (Completion) of

BOOK 8851


the Subdivision lines of Township 14 North, Range 4 East

chains
 240.68 From the original cor. of secs. 14, 15, 22 and 23, hereinbefore described,
 South, on random line, on the south half of the second meridional sec. line, setting temp. $\frac{1}{4}$ sec. and sec. cors. alternately, at intervals of 40 chs. and at
 Intersect the South bdy. of the Tp. at a point 73.65 chs. due West from original cor. of secs. 1, 2, 35 and 36.
 At this point of intersection establish cor. of secs. 34 and 35 only, as hereinbefore described in notes of survey of Part (Completion) of S. bdy. of T14N., R4E.

4.50 From cor. of secs. 34 and 35,
 North, on true line, bet. secs. 34 and 35.
 Over rolling land, thru scattering undergrowth.
 Descend 30 ft. over NE. slope.
 Wash, 10 lks. wide, course E.
 Ascend gradually over SE. slope.
 27.37 Top of low ridge, bears NE. and SW., and old road, same bearing.
 Descend 85 ft. over NW. slope to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 34 and 35, marked on brass cap



Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Descend 16 ft. over NW. slope.
 42.88 Wash, course NE.
 Descend gradually over NE. slope.
 47.90 Wash, course E.
 Descend gradually over rolling E. slope.
 58.20 Wash, course NE. Leave rolling and enter mountainous land.
 Ascend 145 ft. over SE. slope.
 72.80 Top of spur, bears NE.
 Descend 132 ft. over NW. slope to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 26, 27, 34 and 35, marked on brass cap



Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Land, rolling and mountainous.
 Soil, gravelly and rocky, 3rd and 4th rate.
 Timber, none.
 Undergrowth, scrub oak and crucifixion thorn.

 From the reestablished closing cor. of secs. 26 and 35, on the West bdy. of Camp Verde Military Reservation, hereinbefore described,
 S. 89° 50' W., on true line, bet. those parts of the east and west halves of secs. 26 and 35 lying outside the Camp Verde Military Reservation (Abandoned)
 Over gently rolling land, thru scattering undergrowth.

Survey of Part (Completion) of
the Subdivision lines of Township 14 North, Range 4 East

chains	Ascend gradually over NE. slope.
0.22	Intersect witness point (originally closing cor. of secs. 26 and 35)
9.34	Wash, course NE.
23.09	Old road, bears NE. and SW.
30.84	(37.40 chs. S. 89° 50' W. from cor. of secs. 25, 26, 35 and 36) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 26 and 35, marked on brass cap
	S 26 $\frac{1}{4}$ S 35 1927
	Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor. The above described cor. is established at a point which is theoretically due south from the original $\frac{1}{4}$ sec. cor. of secs. 23 and 26, computation being made from the data secured in the retracement of the line bet. secs. 25 and 26, and the E. $\frac{1}{2}$ of line bet. secs. 23 and 26, as hereinbefore described.
	Thence, West, on random line, bet. secs. 26 and 35 (W. $\frac{1}{2}$)
38.26	Intersect the cor. of secs. 26, 27, 34 and 35. Thence, East, on true line, bet. secs. 26 and 35 (W. $\frac{1}{2}$) Over mountainous land, thru scattering undergrowth. Ascend 28 ft. over NW. slope.
2.70	Top of ascent. Descend 70 ft. over NE. slope to
8.36	Leave mountainous and enter gently rolling land. Descend 56 ft. over E. slope.
11.37	Telephone line, bears NW. and SE.
13.12	Electric power transmission line, from Fossil Creek to Jerome, Ariz., bears N. 34 $\frac{1}{2}$ ° W. and S. 34 $\frac{1}{2}$ ° E.
23.47	Rocky wash, 40 lks. wide, course N. 70° E. Descend gradually over NE. slope to $\frac{1}{4}$ sec. cor.
33.37	Wash, 20 lks. wide, course NE.
38.26	Intersect the $\frac{1}{4}$ sec. cor. of secs. 26 and 35.
	Land, mountainous, and rolling. Soil, sandy and gravelly, 3rd rate. Timber, none. Undergrowth, greasewood, scrub oak and crucifixion thorn.

	From cor. of secs. 26, 27, 34 and 35, North, on true line, on E. bdy. of sec. 27. Over mountainous land, thru scattering undergrowth. Descend 40 ft. over NW. slope.
2.68	Bottom of rocky gulch, course NE. Ascend 25 ft. over SE. slope.
6.00	Descend 40 ft. over NE. slope.
11.03	Wash, course E. Leave mountainous and enter rolling land. Ascend 48 ft. over SE. slope.
16.58	Telephone line, bears NW. and SE.
17.48	Electric power transmission line, from Fossil Creek to Jerome, Ariz., bears NW. and SE.
17.50	Top of spur, bears NE. Descend 76 ft. over NW. slope.
27.68	Wash, course E. Ascend 20 ft. over S. slope to
39.69	(Midpoint of W. bdy. of sec. 26) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 26 only, marked on brass cap
	$\frac{1}{4}$ S26 1927
	Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, E. of cor.


Survey of Part (Completion) of
the Subdivision lines of Township 14 North, Range 4 East

BOOK 3851

chains
39.88 Ascend slightly over S. slope.
Top of spur, bears E.
Descend slightly over N. slope to
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in
the ground, for $\frac{1}{4}$ sec. cor. of sec. 27 only, marked on
brass cap

$\frac{1}{4}$ S27 |
1927

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
Descend 15 ft. over N. slope.
42.03 Wash, course NE. Asc. 40 ft. over SE. slope.
46.08 Top of spur, bears E. Descend 15 ft. over N. slope.
48.48 Wash, course E. Thence over rolling E. slope.
54.28 Old road, bears NE. and SW.
59.68 Descend gradually over N. slope.
64.18 Wash, course NE. Ascend 51 ft. over SE. slope.
69.68 Top of spur, bears NE. Desc. 95 ft. over NW. slope to
79.38 Intersect the line bet. secs. 23 and 26, surveyed S. $89^{\circ}20'W$.
Cor. of said secs. established at this point of inter-
section as hereinafter described.
Descend 8 ft. over NW. slope to
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in
the ground, for cor. of secs. 22 and 27 only, marked
on brass cap




1927

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, mountainous and rolling.
Soil, sandy and gravelly, 3rd rate.
Timber, none.
Undergrowth, greasewood and sagebrush.

From the reestablished closing cor. of secs. 23 and 26, on
the West bdy. of the Camp Verde Military Reservation,
hereinbefore described,
S. $89^{\circ}20'W$, on true line, between those parts of the west
halves of secs. 23 and 26 lying outside the Camp Verde
Military Reservation.
Over gently rolling land, thru scattering undergrowth.
Ascend gradually over NE. slope.
0.17 Intersect witness point (originally closing cor. of secs.
23 and 26).
10.56 Descend 31 ft. over W. slope.
15.98 Wash, course N. Ascend 15 ft. over E. slope.
19.96 Ascend 40 ft. over NE. slope.
31.76 Descend 17 ft. over NW. slope to
34.75 (38.19 chs. S. $89^{\circ}20'W$ from original $\frac{1}{4}$ sec. cor. of secs.
23 and 26) Intersect the E. bdy. of sec. 27 at 62 lks.
South from cor. of secs. 22 and 27.
At this point of intersection, set an iron post, 3 ft.
long, 2 ins. in diam., 27 ins. in the ground, for cor.
of secs. 23 and 26 only, marked on brass cap



1927

Survey of Part (Completion) of
the Subdivision lines of Township 14 North, Range 4 East

chains	<p>Raise a mound of stone, 2 ft. base, 1½ ft. high, E. of cor.</p> <p>Land, rolling. Soil, gravelly; 3rd rate. Timber, none. Undergrowth, greasewood and scrub oak.</p> <hr/> <p>From cor. of secs. 22 and 27, North, on true line, on E. bdy. of that portion of sec. 22 lying outside the Camp Verde Military Reservation. Over rolling land, thru scattering undergrowth. Descend slightly over NW. slope.</p> <p>0.78 Wash, 100 lks. wide, course NE. Ascend 42 ft. over SE. slope.</p> <p>5.18 Point of spur, bears E. Descend 70 ft. over N. slope.</p> <p>10.68 Wash, 100 lks. wide, course NE. Descend gradually over NE. slope.</p> <p>15.33 Wash, course NE. Ascend gradually over SE. slope.</p> <p>32.18 Top of low spur, bears E. Descend 60 ft. over N. slope to</p> <p>40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for ¼ sec. cor. of sec. 22 only, marked on brass cap</p> <p style="text-align: center;">¼ S22 1927</p> <p>Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.</p> <p>Descend slightly over N. slope to</p> <p>40.03 (Midpoint of W. bdy. of sec. 23) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for ¼ sec. cor. of sec. 23 only, marked on brass cap</p> <p style="text-align: center;">¼ S23 1927</p> <p>Raise a mound of stone, 2 ft. base, 1½ ft. high, E. of cor.</p> <p>Descend 40 ft. over N. slope.</p> <p>54.38 Wash, 30 lks. wide, course E. Ascend 20 ft. over S. slope.</p> <p>57.68 Top of low spur, bears E. Descend 25 ft. over N. slope.</p> <p>62.18 Drain, course E. Thence over E. slope.</p> <p>73.48 Wash, course E.</p> <p>80.33 Intersect the reestablished closing cor. of secs. 22 and 23 on West bdy. of Camp Verde Mil. Reserv., hereinbefore described.</p> <p>Land, rolling. Soil, sandy and gravelly, 3rd rate. Timber, none. Undergrowth; greasewood.</p> <hr/> <p>From cor. of secs. 33 and 34, on S. bdy. of the Tp., hereinbefore described, N. 0° 1' W., on true line, bet. secs. 33 and 34. Over mountainous land, thru scattering timber and undergrowth. Descend 40 ft. over NW. slope.</p> <p>3.00 Bottom of ravine, course E. Ascend 250 ft. over rocky S. slope.</p> <p>19.80 Top of rocky spur, bears SE. Ascend gradually over E. slope.</p> <p>27.60 Rocky gulch, course SE. Asc. 41 ft. over S. slope.</p> <p>29.30 Point of sharp spur, bears SE. Descend 60 ft. over NE. slope.</p>
--------	--


Survey of Part (Completion) of

BOOK 3851


the Subdivision lines of Township 14 North., Range 4 East.

Chains

- 31.65 Deep rocky gulch course E.
Ascend 35 ft. over S. slope.
- 38.80 Top of rocky spur bears SE.
Descend 58 ft. over abrupt rocky N. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the
ground for $\frac{1}{4}$ sec. cor., marked on brass cap




- 41.50 Raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high W. of cor.
Rocky ravine course E.
Ascend 54 ft. over S. slope.
- 51.00 Top of spur slopes E.
Descend 387 ft. over NW. slope.
- 77.04 Rocky gulch, course NE.
Ascend 23 ft. over SE. slope.
- 79.00 Top of spur bears NE.
Descend 6 ft. over NW. slope. to
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the
ground for cor. of secs. 27, 28, 33, and 34, marked
on brass cap



Raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high W. of cor.

Land, rough mountainous.
Soil, stony 3 rd. and 4 th. rate.
Timber, scattering, oak, mesquite, and pinion.
Undergrowth, oak, greasewood brush and crucifixion
thorn.

- 40.00 East on a random line bet. secs. 27 and 34.
Set temp. $\frac{1}{4}$ sec. cor.
- 80.00 Intersect N. and S. line at the cor. of secs. 26, 27, 34, and
35.
- Thence
West on true line bet. secs. 27 and 34.
Descend 18 ft. over NW. slope over mountainous land, thru.
scattering timber and dense undergrowth.
- 3.06 Rocky gulch course NE.
Ascend 102 ft. over SE. slope.
- 6.20 Top of narrow spur bears NE.
Descend 104 ft. over NW. slope.
- 16.14 Sand wash 20 lks. wide course NE.
Ascend 127 ft. over SE. slope.
- 30.00 Top of spur bears NE. thence along broken N. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the
ground for $\frac{1}{4}$ sec. cor., marked on brass cap




Survey of Part (Completion) of
the Subdivision lines of Township 14 North., Range 4 East.

Chains


No bearing trees within limits
 Raise a mound of stone 2 ft. base, 1½ ft. high N. of cor.
 63.00 Top of spur bears NE 144 ft. above 1 sec. cor.
 65.00 Descend over SW. slope. 45 ft.
 66.90 Gulch course NE.
 Ascend 82 ft. over SE. slope
 73.00 Top of spur bears NE.
 Descend 9 ft. over NW. slope.
 74.77 Gulch course NE.
 Ascend over SE. slope
 79.60 Point of spur bears NE.
 Descend slightly
 80.00 The cor. of secs. 27, 28, 33, and 34.

Land, mountainous.
 Soil, stony 3 rd. rate.
 Timber, scattering oak, and pinion.
 Undergrowth, oak brush and crucifixion thorn.

N 0°1'W. bet. secs. 27 and 28.
 Descend 106 ft. over steep NE. slope thru scattering
 timber and undergrowth.
 4.00 Foot of steep descent in flat bears E. and W.
 7.20 Sand wash 100 lks. wide course E. ; Leave flat bears NE.
 and W.
 Ascend 21 ft. over S. slope
 15.50 Top of low spur bears E.
 Descend 15 ft. over N. slope.
 18.40 Rocky gulch course S60°E.
 Ascend 38 ft. over abrupt SE. slope.
 23.00 Top of ascent on steep E. slope
 Descend 76 ft. over NE. slope.
 32.00 Foot of slope
 Ascend 44 ft. over SE. slope
 38.00 Top of ascent on spur bears N. thence along top of same
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in
 the ground for ¼ sec. cor. marked on brass cap



No bearing trees within limits.
 Raise a mound of stone 2 ft. base, 1½ ft. high W. of cor
 Descend 143 ft. along top of spur.
 40.20 Dim road bears NE. and SW.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. with marked
 stone at the base 12 ins. in the ground to
 bedrock, supported in a mound of stone for. cor. of
 secs. 21, 22, 27, and 28, marked on brass cap




Land rolling and mountainous.
 Soil, stony 3 rd. rate.
 Timber, scattering mesquite, cedar, and pinion.
 Undergrowth, mesquite and oak brush.

Survey of Part (Completion) of

BOOK 3857

the Subdivision lines of Township 14 North, Range 4 East

chains East, on random line, bet. secs.22 and 27.
 40.00 Set temp. $\frac{1}{4}$ sec.cor.
 80.00 Intersect N.and S.line 5 lks.S. of cor.of secs.22 and 27
 Thence,
 S.89°58'W.,on true line, bet. secs.22 and 27.
 Over rolling land,thru scattering timber and undergrowth.
 Descend slightly over NW. slope.
 0.80 Wash, 100 lks.wide, course NE.
 Ascend 44 ft.over SE. slope.
 6.45 Top of spur, bears NE.
 Descend 34 ft.over NW. slope.
 12.85 Bottom of gulch,course N. a dist.of 50 lks.,thence E.
 2 chs.,thence N.
 Ascend 22 ft.over E. slope to
 15.45 Top of bank,bears N. and S. Thence over gently rolling
 land. Ascend gradually over NE. slope.
 32.20 Wash, 15 lks.wide,course N.20°E. a dist.of 5 chs.,
 thence E.
 37.60 Wash, 20 lks.wide,course NE. a dist.of 3 chs. thence E.
 39.80 Wash, 50 lks.wide,course NE.
 40.00 Point for $\frac{1}{4}$ sec.cor.of secs.22 and 27 falls in above
 noted wash,where it is impracticable to monument the
 cor.,therefore at a point on S. bank of wash, 15 lks.
 S. from true cor.point,
 set an iron post, 3 ft.long, 1 in.in diam.,27 ins.
 in the ground,for witness cor.to the $\frac{1}{4}$ sec.cor.of
 secs.22 and 27, marked on brass cap



1927

No bearing trees available.
 Raise a mound of stone,2 ft.base,1 $\frac{1}{2}$ ft.high,N.of cor.

Ascend gradually over NE. slope.
 43.20 Wash, 10 lks.wide,course N.80°E.
 Ascend 47 ft.over SE. slope.
 48.45 Electric power transmission line,from Fossil Creek to
 Jerome,Ariz., bears NW. and SE.
 50.40 Telephone line, bears N.30°W. and S.30°E.
 53.20 Top of spur, bears NE.
 Descend 24 ft.over NW. slope.
 57.35 Draw, course N.30°E. Leave rolling and enter mountainous
 land. Ascend 125 ft.over E. slope.
 68.70 Top of spur, bears N.
 Descend 73 ft.over W. slope.
 73.95 Bottom of gulch,6 lks.wide,course N. a dist.of 5 chs.,
 thence NE.
 Ascend 66 ft.over E. slope to
 77.80 Top of steep slope,bears N. and S. Leave mountainous
 and enter rolling land.
 Ascend 15 ft.over gradual NE. slope to
 80.00 The cor. of secs.21,22,27 and 28.

Land, rolling and mountainous.
 Soil, gravelly and rocky,3rd rate.
 Timber, mesquite,juniper and oak.
 Undergrowth, greasewood,scrub oak and mesquite.

N.0° 1'W.,on true line,on W. bdy.of sec.22.
 Over rolling land,thru scattering undergrowth.
 Descend gradually over NE. slope.
 20.00 Descend gradually over NW. slope.
 22.60 Road, bears NE. and SW.

Survey of Part (Completion) of

the Subdivision Lines of Township 14 North, Range 4 East

chains	
38.30	Draw, course NE. Thence over gently rolling E. slope.
39.10	Telephone line, bears NW. and SE.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 21 and 22, marked on brass cap
	$\frac{1}{4}$ S21 S22 1927
	Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. Descend gradually over E. slope.
40.90	Electric power transmission line, from Fossil Creek to Jerome Ariz, bears NW. and SE.
60.00	Descend gradually over NE. slope to
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for cor. of secs. 16 and 21 only, marked on brass cap
	T14N S16 S22 S21 R4E 1927
80.85	Continue line and measurement Intersect N. bdy. of sec. 22, surveyed due West. Cor. of sec. 22 only (NW. cor.) established at this point of intersection as hereinafter described.
	Land, rolling. Soil, sandy and gravelly, 3rd rate. Timber, none. Undergrowth, scrub mesquite and juniper.

	From reestablished closing cor. of secs. 15 and 22 on the W. bdy. of Camp Verde Military Reservation, hereinbefore described, West, on true line, on N. bdy. of that portion of sec. 22 lying outside said reservation.
9.70	Over gently rolling land, thru scattering undergrowth.
39.85	Wash, course NE. Ascend gradually over NE. slope to (40.00 chs. W. from sec. cor.) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 15 and 22, marked on brass cap
	$\frac{1}{4}$ S 15 S 22 1927
	Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
44.05	Continue gradual ascent over NE. slope.
52.00	Road, bears NE. and SW.
54.03	Descend 22 ft. over NW. slope.
59.85	Wash, 10 lks. wide, course N. 80° E. Asc. 35 ft. over SE. slope.
67.85	Low ridge, bears NE. and SW. Descend 20 ft. over NW. slope.
75.03	Wash, course N. 60° E. Asc. gradually over NE. slope to (75.18 chs. W. from cor. of secs. 14, 15, 22 & 23) Intersect random W. bdy. of sec. 15 surveyed due South. Cor. of secs. 15 & 16 established at this point of intersection as hereinafter described.
	Continue line and measurement.
79.85	Ascend gradually over NE. slope to (80.00 chs. W. from cor. of secs. 14, 15, 22 & 23) Intersect the W. bdy. of sec. 22 surveyed N. 0° 1' W.


Survey of Part (Completion) of

BOOK 3851

the Subdivision lines of Township 14 North, Range 4 East

chains At this point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bed-rock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for cor. of sec. 22 only, marked on brass cap

T14N R4E




1927

Land, rolling.
Soil, sandy and stony, 3rd rate.
Timber, none.
Undergrowth, greasewood and sagebrush.

From the original cor. of secs. 9, 10, 15 and 16, hereinbefore described,

South, on random line, on W. bdy. of sec. 15.
40.00 Set temp. $\frac{1}{4}$ sec. cor. of sec. 15.
91.20 Intersect N. bdy. of sec. 22 at a point 4.82 chs. E. of the NW. cor. of said sec.
At this point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 15 and 16 only, marked on brass cap




S22

1927

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Thence,
North, on true line, on W. bdy. of sec. 15.
Over rolling land, thru scattering undergrowth.
Descend 32 ft. over NE. slope.

21.03 Wash, 25 lks. wide, course E.
Ascend 29 ft. over S. slope to
29.25 Top of bank, bears NE. and SW.
Leave rolling and enter level land.
29.60 State highway, from Prescott to Camp Verde, Ariz., bears E. and W.
39.15 (40.00 chs. in N. latitude from cor. of secs. 16 and 21)
Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 16 only, marked on brass cap



1927

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
Continue over level land, thru scattering undergrowth.

51.20 (40.00 chs. S. from original cor. of secs. 9, 10, 15 and 16)
Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 15 only, marked on brass cap.

Survey of Part (Completion) of
the Subdivision Lines of Township 14 North, Range 4 East

chains	
	<p>1927</p> <p>Raise a mound of stone, 2 ft. base, 1½ ft. high, E. of cor.</p> <p>Continue over level land, thru scattering undergrowth.</p> <p>54.00 State highway, bears NE. and SW., from Prescott to Jerome, Arizona.</p> <p>61.95 Wire fence, bears N. 60° E. and S. 60° W. Leave level and enter rolling land, scattering timber and dense undergrowth. Descend 41 ft. over NW. slope to</p> <p>68.00 Foot of descent, bears NE. and SW. Leave rolling and enter level bottom land.</p> <p>77.80 Cherry Creek Wash, 60 lks. wide, course NE. Continue over level land.</p> <p>91.20 (52.05 chs. N. from ¼ sec. cor. of sec. 16) Intersect the original cor. of secs. 9, 10, 15 and 16.</p> <p>Land, rolling and level. Soil, sandy and gravelly, 2nd and 3rd rate. Timber, mesquite. Undergrowth, scrub oak, mesquite and grassewood.</p> <hr/> <p>From the cor. of secs. 32 and 33 on the S. bdy. of the Tp., hereinbefore described,</p> <p>N. 0° 1' W., on true line, bet. secs. 32 and 33. Over mountainous land, thru scattering timber and dense undergrowth. Ascend 100 ft. over SE. slope.</p> <p>8.00 Top of ridge, bears E. and W. A low pass in this ridge bears E. about 30 chs. dist. Descend 118 ft. over NE. slope to</p> <p>16.20 Head of ravine, course NE. Ascend 45 ft. over E. slope to</p> <p>19.00 Old road, bears NE. and SW.</p> <p>26.00 Descend 195 ft. over NE. slope to</p> <p>40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, supported in a mound of stone, for ¼ sec. cor. of secs. 32 and 33, marked on brass cap</p> <p style="text-align: center;">S32 S33</p> <p style="text-align: center;">1927</p> <p>from which</p> <p>A juniper, 6 ins. in diam., bears N. 58° E., 54 lks. dist., marked ¼ S33 BT</p> <p>A juniper, 6 ins. in diam., bears N. 7½° W., 70 lks. dist., marked ¼ S32 BT</p> <p>Ascend slightly over E. slope.</p> <p>45.20 Descend 360 ft. over NE. slope.</p> <p>72.00 Ravine, course SE. Ascend 190 ft. over steep SW. slope to</p> <p>80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 28, 29, 32 and 33, marked on brass cap</p>

Survey of Part (Completion) of
the Subdivision lines of Township 14 North., Range 4 East

BOOK 3851

Chains

T14N	R4E
S29	S28
S32	S33

1927

from which

- A juniper 6 ins. in diam. bears N40°E.275 lks. dist., marked T14N.,R4E.,S28 BT.
- A juniper 8 ins. in diam. bears S9¼°E.214 lks. dist., marked T14N.,R4E.,S33 BT.
- A juniper 8 ins. in diam. bears S40°W.62 lks. dist., marked T14N.,R4E.,S32 BT.
- A juniper 6 ins. in diam. bears N20°W.93 lks. dist., marked T14N.,R4E.,S29 BT.

Land, rough mountainous.
Soil, stony 3 rd. and 4 th. rate.
Timber, scattering, juniper, cedar, and pinion.
Undergrowth, oak and juniper brush.

- 40.00 East on a random line bet. secs.28 and 33.
- 79.80 Set temp. ¼ sec. cor.
- Intersect N. and S. line 7 lks. S. of the cor. of secs. 27, 28, 33, and 34.
- Thence
- S 89°57'W. on true line bet. secs.28 and 33.
- Descend 29 ft. over NW. slope over stony mountainous land thru. scattering timber and dense undergrowth.
- 17.50 Sand wash course N.
- 26.20 Sand wash 25 lks. wide course NE.; Old road in wash bears NE. and SW.
- Ascend 165 ft. over E. slope to
- 39.90 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for ¼ sec. cor., marked on brass cap

¼ S 28
¼ S 33

1927

from which

- A juniper 4 ins. in diam. bears N80°E.132 lks. dist., marked ¼ S28 BT.
- A juniper 6 ins. in diam. bears S34°E.18 lks. dist., marked ¼ S33 BT.
- Descend 26 ft. over NW. slope.
- 42.80 Ravine course NE.
- Ascend 216 ft. over SE. slope.
- 51.30 Top of rocky spur bears SE.
- Descend 80 ft. over SW. slope.
- 61.50 Rocky ravine course SE.
- Ascend 126 ft. over NE. slope.
- 66.80 Top of gravel spur bears SE.
- Descend 90 ft. over SW. slope.
- 72.80 Ravine 6 lks. wide course S.
- Ascend 83 ft. over SE. slope.
- 75.30 Top of ascent thence over S. slope.
- 79.80 The cor. of secs. 28, 29, 32, and 33.

Land, mountainous.
Soil, stony 3 rd. and 4 th. rate.

Survey of Part (Completion) of
the Subdivision lines of Township 14 North., Range 4 East

Chains

Timber, scattering juniper.
Undergrowth, oak and juniper brush.

N 0°1'W. bet. secs. 28 and 29.
Ascend 115 ft. over SE. slope over stony mountainous
land, thru scattering timber and undergrowth.
8.50 Head of draw course SE., continue steep ascent 321 ft.
20.30 Top of black rock peak on ridge bears E. and W.
Descend 537 ft. over steep NE. slope.
40.00 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in
the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

S29 | S28
|
1927

from which

A juniper 6 ins. in diam. bears N02°E. 180 lks. dist.,
marked $\frac{1}{4}$ S28 BT.
A juniper 6 ins. in diam. bears S21 $\frac{1}{2}$ °W. 28 lks. dist.,
marked $\frac{1}{4}$ S29 BT.
44.00 Ravine course NE.
53.50 Ravine course E.
Ascend 83 ft. over S. slope.
58.40 Top of gravel spur bears NE.
Descend 142 ft. over NW. slope.
64.10 Wash course NE.
71.00 Sand wash 10 lks. wide course E.
Ascend 47 ft. over S. slope to
80.00 Set an iron post 3 ft. long. 2 ins. in diam. 20 ins. in the
ground to bedrock, supported in a mound of stone
for cor. of secs. 20, 21, 28, and 29. marked on brass
cap

T14N | R4E
S20 | S21
S29 | S28

1927

No bearing trees within limits.
Raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high W. of cor.

Land, mountainous.
Soil, stony 3 rd. and 4 th. rate.
Timber, scattering juniper.
Undergrowth, oak, and juniper brush.

40.00 N 89°57'E. on a random line bet. secs. 21 and 28
Set temp. $\frac{1}{4}$ sec. cor.
79.82 Intersect N. and S. line 16 lks. N. of the cor. of secs.
21, 22, 27, and 28.
Thence
N 89°56'W. on true line bet. secs. 21 and 28.
Over rolling stony mountainous land, slopes N. thru.
scattering timber and undergrowth.

Survey of Part (Completion) of
the Subdivision lines of Township 14 North., Range 4 East.

Chains	
3.60	Old road bears N. and S.
4.82	Descend 30 ft. over W. slope.
7.82	Foot of descent in flat bears N. and S.
9.22	Wash 8 lks. wide 3 ft. deep course N.
20.52	Wash 10 lks. wide 3 ft. deep course NE.; Leave flat bears NE. and SW.
	Ascend over NE. slope. 117 ft.
38.32	Ascend over E. slope.
39.91	Set an iron post 3 ft. long, 1 in. in diam. 17 ins. in the ground to bedrock, supported in a mound of stone for $\frac{1}{4}$ sec. cor. marked on brass cap
	$\begin{array}{r} \frac{S\ 21}{S\ 28} \\ \hline \end{array}$
	1927
	from which
	A juniper 8 ins. in diam. bears N12°E. 138 lks. dist., marked $\frac{1}{4}$ S21 BT.
	A pinion 8 ins. in diam. bears S65°E. 107 lks. dist., marked $\frac{1}{4}$ S28 BT.
40.00	Top of white limestone spur bears N.
	Descend 60 ft. over W. slope.
43.32	Ravine course N.
	Ascend 60 ft. over E. slope.
49.52	Top of spur bears N.
	Descend over NW. slope.
61.32	Ravine course NE.
	Ascend 300ft. over E. slope over rock ledges.
78.82	Top of ascent on ledge bears NE. and SW. thence along N. slope.
79.82	The cor. of secs. 20, 21, 28, and 29.
	Land, mountainous. Soil, stony 3 rd, and 4 th. rate. Timber, juniper, and pinion. Undergrowth, juniper, greasewood and oak brush.
	N 0°1'W. bet. secs. 20 and 21.
	Descend 276 ft. over steep NE. slope, thru scattering timber and undergrowth over mountainous land.
12.20	Ravine course E.
	Ascend 140 ft. over S. slope.
24.00	Top of spur bears E.
	Descend 220 ft. over NE. slope over rolling mountainous land.
40.00	Set an iron post 3 ft. long, 1 in. in diam. 6 ins. in the ground to bedrock, supported in a mound of stone for $\frac{1}{4}$ sec. cor. marked on brass cap
	$\begin{array}{c} \uparrow \\ S20 \quad \quad S21 \\ \downarrow \end{array}$
	1927
	from which
	A juniper 4 ins. in diam. bears S82 $\frac{1}{2}$ °E. 77 lks. dist., marked $\frac{1}{4}$ S21 BT.
	A juniper 5 ins. in diam. bears S65°W. 136 lks. dist., marked $\frac{1}{4}$ S20 BT.
	Continue descent 177 ft. over NE. slope.

Survey of Part (Completion) of
the Subdivision lines of Township 14 North., Range 4 East

Chains

45.50 Old road bears NE. and SW.
 52.60 Wash course E. thence along E. slope
 68.00 Descend 30 ft. over N. slope.
 73.00 Wash course E. Leave mountainous land bears NW. and SE.
 Enter rolling land.
 78.00 Sand wash course E.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. with marked
 stone at the base 17 ins. in the ground to bedrock,
 supported in a mound of stone for cor. of secs. 16,
 17, 20, and 21., marked on brass cap

T14N	R4E
S17	S16
S20	S21

1927

Land rolling and mountainous.
 Soil, stony 3 rd. and 4 th. rate.
 Timber, juniper and pinion.
 Undergrowth, oak, greasewood, and crucifixion thorn.

40.00 S 89°56'E. on a random line, on N. bdy. of sec. 21.
 Set temp. 1/4 sec. cor.
 79.78 Intersect N. and S. line 10 lks. N. of the cor. of secs.
 16 and 21.
 Thence
 N 89°52'W. on true line, on N. bdy. of sec. 21.
 Over rolling stony land, thru scattering undergrowth.
 6.48 Sand wash 30 lks. wide course N.
 19.58 Sand wash 30 lks. wide course NE.
 23.78 Top of low spur bears NE.
 30.28 Head of draw course NE.
 30.48 Electric power line from Fossil Creek to Jerome Ariz.
 bears NW. and SE.
 31.78 Telephone line bears NW. and SE.
 39.89 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in
 the ground for 1/4 sec. cor. of secs. 16 and 21,
 marked on brass cap.

S 16
S 21

1927

from which


A palo verde 6 ins. in diam. bears S55 1/2° E. 97 lks. dist.,
 marked 1/4 S21 BT.
 No other bearing trees within limits.
 Raise a mound of stone 2 ft. base, 1 1/2 ft. high N. of cor.
 54.58 Top of spur bears NE.
 Descend over NW. slope.
 60.28 Sand wash 15 lks. wide course NE.
 Ascend gradually over S. slope.
 79.78 The cor. of secs. 16, 17, 20, and 21

Land, rolling.
 Soil, stony 3 rd. rate.
 Timber, none.
 Undergrowth, greasewood and catclaw brush.


Survey of Part (Completion) of
the Subdivision lines of Township 14 North., Range 4 East

Chains

N 0°1'W. bet. secs.16 and 17.
Ascend gradually over SE. slope over rolling stony land,
thru. scattering undergrowth.
8.00 State Highway from Prescott to Camp Verde Ariz. bears
N72°E. and S72°W.
11.50 Descend 56 ft. over N. slope.
13.00 Foot of descent in bottom land along Cherry Creek Wash,
bears E. and W.
Enter scattering timber and dense mesquite and catclaw
undergrowth.
20.10 Cherry Creek Wash 60 lks. wide 3 ft. deep course E.
27.50 Leave bottom land along Cherry Creek Wash bears E. and
W.
Ascend 40 ft. over S. slope.
28.60 Old road bears NW. and SE.
32.00 Top of ascent in S. edge of flat bears E. and W. thence
over nearly level land.
38.00 Drain course NE.
40.00 Set an iron post 3 ft. long, 1 in. in diam. with marked
stone at the base, 27 ins. in the ground for
sec. cor. marked on brass cap



No bearing trees within limits.
60.73 Telephone line bears NW. and SE.
63.25 Electric power line from Fossil Creek to Jerome Ariz.
bears NW. and SE.
73.50 Sand wash 8 lks. wide 2 ft. deep course NE.
94.78 Intersect the S. bdy of sec. 8, T14N., R4E. at a point
4.47 chs. W. of the reestablished cor. of secs.
8 and 9. hereinbefore described. At this point
Set an iron post 3 ft. long, 2 ins. in diam. 27 ins. in the
ground for reestablished cor. of secs. 16 and 17 only., marked
on brass cap



No bearing trees within limits.
Raise a mound of stone 2 ft. base, 1 1/2 ft. high S. of cor.

Land, rolling.
Soil, stony 2 nd. and 3 rd. rate.
Timber, scattering mesquite.
Undergrowth, greasewood and catclaw brush.

From the cor. of secs. 31 and 32 on S. bdy. of Tp. herein-
before described


N. 0°2'W. bet. secs. 31 and 32.
Ascend 104 ft. over SW. slope over rolling stony mount-
ainous land, thru. scattering juniper timber and
dense oak brush undergrowth.

Survey of Part (Completion) of
the Subdivision lines of Township 14 North., Range 4 East.

Chains


37.00
40.00

Descend 17 ft. over NW. slope.
Set an iron post 3 ft. long, 1 in. in diam. 8 ins. in the ground to bedrock, supported in a mound of stone for $\frac{1}{4}$ sec. cor., marked on brass cap



from which

A juniper 8 ins. in diam. bears $S81\frac{1}{4}^{\circ}E.$ 135 lks. dist., marked $\frac{1}{4}$ S32 BT.
A juniper 4 ins. in diam. bears $S25^{\circ}W.$ 89 lks. dist., marked $\frac{1}{4}$ S31 BT.
42.00 Ascend 153 ft. over SW. slope.
45.30 Head of ravine course $S30^{\circ}W.$
Ascend over SE. slope.
59.00 Top of divide bears E. and W.; Enter heavy timber bears E. and W.
68.00 N. edge of divide bears NW. and SE.
Descend abruptly 433 ft. over N. slope.
80.00 Set an iron post 3 ft. long, 2 ins. in diam. 24 ins. in the ground supported in a mound of stone for cor. of secs. 29, 30, 31, and 32. marked on brass cap



1927

from which

A juniper 16 ins. in diam. bears $N55\frac{1}{2}^{\circ}E.$ 88 lks. dist., marked T14N., R4E., S29 BT.
A juniper 16 ins. in diam. bears $S5\frac{1}{2}^{\circ}E.$ 92 lks. dist., marked T14N., R4E., S32 BT.
A juniper 12 ins. in diam. bears $S20^{\circ}W.$ 92 lks. dist., marked T14N., R4E., S31 BT.
A juniper 8 ins. in diam. bears $N40^{\circ}W.$ 64 lks. dist., marked T14N., R4E., S30 BT.

Land, mountainous.
Soil, stony 3 rd. and 4 th. rate.
Timber, pinion and juniper.
Undergrowth, oak and juniper brush.

40.00 East on a random line bet. secs. 29 and 32.
Set temp. $\frac{1}{4}$ sec. cor.
80.04 Intersect N. and S. line 8 lks. S. of the cor. of secs. 28, 29, 32, and 33.
Thence
S $89^{\circ}57'W.$ on true line bet. secs. 29 and 32.
Over S. slope over rolling stony mountainous land, thru scattering timber and heavy undergrowth.
2.30 Descend 120 ft. over broken SW. slope.
17.10 Ravine course SE.
Ascend over NE. slope.
34.20 Wash course NE.

Survey of Part (Completion) of
the Subdivision lines of Township 14 North., Range 4 East.

BOOK 2337

Chains

40.02 Ascend 400 ft. over NE. slope
Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{S\ 29}{S\ 32}$
1927

from which

A juniper 6 ins. in diam. bears N3°E. 111 lks. dist., marked $\frac{1}{4}$ S29 BT.
A juniper 8 ins. in diam. bears S35°W. 148 lks. dist., marked $\frac{1}{4}$ S32 BT.

60.00 Enter heavy timber bears NE. and SW.
70.00 Top of ridge bears NE. and SW.; Saddle in ridge bears NE. about 30.00 chs. dist.
Thence along N. slope
78.00 Descend 40 ft. over NW. slope to
80.04 The cor. of secs. 29, 30, 31, and 32.

Land, mountainous.
Soil, stony 3 rd. and 4 th. rate.
Timber, pinion, oak, and juniper.
Undergrowth, oak, and juniper brush.

40.00 West on a random line bet. secs. 30 and 31.
Set temp. $\frac{1}{4}$ sec. cor.
76.70 Intersect W. bdry. of Tp. at the cor. of secs. 30 and 31. hereinbefore described.

Thence
East on true line bet. secs. 30 and 31.
Descend NE. slope over stony mountainous land, thru scattering timber and dense undergrowth.

.10 Ravine course NE.
Ascend 34 ft. over NW. slope.
2.00 Top of ascent on point of spur slopes N.
Descend 26 ft. over E. slope.
13.00 Ravine course NW.
Ascend 300 ft. over steep rocky W. slope.
31.00 Top of ascent on point of spur slopes N.
Descend 56 ft. over E. slope.
36.70 Set an iron post 3 ft. long, 1 in. in diam. 16 ins. in the ground to bedrock supported in a mound of stone for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{S\ 30}{S\ 31}$
1927

from which

A juniper 12 ins. in diam. bears N56°W. 71 lks. dist., marked $\frac{1}{4}$ S30 BT.
A pinion 4 ins. in diam. bears S41 $\frac{1}{2}$ °E. 45 lks. dist., marked $\frac{1}{4}$ S31 BT.

43.30 Ravine course N.
Ascend 24 ft. over W. slope.
52.50 Top of spur slopes N.
Descend 74 ft. over E. slope.
70.70 Ravine course N.
Ascend 102 ft. over NW. slope to
76.70 The cor. of secs. 29, 30, 31, and 32.

Survey of Part (Completion) of
the Subdivision lines of Township 14 North., Range 4 East.

Chains

Land, mountainous.
Soil, stony 3 rd. and 4 th. rate.
Timber, oak, pinion, and juniper.
Undergrowth, oak, and juniper brush.

36.40

N $0^{\circ}21'W$. bet. secs. 29 and 30.
Descend 630 ft. over NE. slope over stony mountainous
land, thru heavy timber, and brush undergrowth.
Ravine 30 lks. wide course NW.

40.00

Ascend 100 ft. over SW. slope.
Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the
ground for $\frac{1}{4}$ sec. cor., marked on brass cap

S30

S29

1927

from which

A juniper 8 ins. in diam. bears $S55^{\circ}E$. 73 lks. dist.,
marked $\frac{1}{4}$ S29 BT.

A pinion 8 ins. in diam. bears $S43\frac{1}{2}^{\circ}W$. 65 lks. dist.,
marked $\frac{1}{4}$ S30 BT.

55.00

Top of rocky spur bears NW.
Descend 300 ft. over NE. slope.

67.00

Ravine course NW.
Ascend 20 ft. over SW. slope to

80.00

Set an iron post 3 ft. long, 2 ins. in diam. 16 ins. in
the ground to bedrock, supported in a mound of
stone for cor. of secs. 19, 20, 29, and 30., marked
on brass cap

T14N	R4E
S19	S20
S30	S29

1927

from which

A juniper 6 ins. in diam. bears $N7\frac{1}{2}^{\circ}E$. 175 lks. dist.,
marked T14N., R4E., S20 BT.

A juniper 4 ins. in diam. bears $N34^{\circ}W$. 72 lks. dist.,
marked T14N., R4E., S19 BT.

No other bearing trees within limits.

Raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high W. of cor.

Land, mountainous.
Soil, stony 3 rd. and 4 th. rate.
Timber, cedar, pinion, and juniper.
Undergrowth, oak and juniper brush.

40.00

N $89^{\circ}57'E$. on a random line bet. secs. 20 and 29
Set temp. $\frac{1}{4}$ sec. cor.

80.02

Intersect N. and S. line 8 lks. N. of the cor. of secs.
20, 21, 28, and 29.

Thence

Survey of Part (Completion) of
the Subdivision lines of Township 14 North., Range 4 East.

BOOK 3851

Chains
 West on true line bet. secs. 20 and 29.
 Ascend 25 ft. over NE. slope over stony mountainous land
 thru scattering timber and dense undergrowth.
 4.00 Top of spur bears NE.
 Descend 82 ft. over NW. slope
 10.92 Ravine course N., thence along N. slope.
 17.22 Ravine course NE.
 Ascend 300 ft. over SE. slope.
 30.00 Top of spur bears N.
 Descend 40 ft. over W. slope.
 37.60 Ravine course N.
 Ascend 60 ft. over E. slope.
 40.01 Set an iron post 3 ft. long, 1 in. in diam. 20 ins. in the
 ground to bedrock, supported in a mound of stone
 for + sec. cor., marked on brass cap

S 20
 ———
 S 29
 1927.

from which

A juniper 6 ins. in diam. bears N69 $\frac{1}{2}$ °E. 66 lks. dist.,
 marked $\frac{1}{4}$ S20 BT.
 A juniper 6 ins. in diam. bears S44 $\frac{1}{2}$ °E. 93 lks. dist.,
 marked $\frac{1}{4}$ S29. BT.

51.02 Top of spur bears NW.
 Descend 195 ft. over SW. slope.
 72.00 Descend abruptly 224 ft. over SW. slope to
 80.02 The cor. of secs. 19, 20, 29, and 30.

Land, mountainous.
 Soil, stony 3 rd. and 4 th. rate.
 Timber, juniper,
 Undergrowth, oak and juniper brush.

40.00 West on a random line bet. secs. 19 and 30.
 Set temp. + sec. cor.
 76.80 Intersect the W. bdy. of Tp. 13 lks. N. of the cor. of
 secs. 19 and 30 hereinbefore described.
 Thence
 N 89°54'E. on true line bet. secs. 19 and 30.
 Ascend 60 ft. over NW. slope over mountainous land, thru
 scattering timber and dense undergrowth.
 2.30 Top of spur bears N.
 Descend 102 ft. over E. slope.
 9.00 Ravine course N.
 Ascend W. slope.
 10.70 Top of spur bears N.
 Descend E. slope.
 13.00 Sand wash course N.
 Ascend 34 ft. over W. slope.
 15.60 Top of spur bears N.
 Descend over E. slope.
 18.00 Sand wash course N.
 Ascend
 21.50 Top of ascent on point of spur slopes N.
 Descend 60 ft. over E. slope.
 26.24 Ravine course N.
 28.00 Sand wash course N.
 Ascend 40 ft. over W. slope.
 32.40 Top of spur bears N.
 Descend 40 ft. over E. slope.
 34.50 Canyon course N.
 36.80 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in

Survey of Part (Completion) of
the Subdivision lines of Township 14 North., Range 4 East.

Chains

the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ $\frac{S 19}{S 30}$

1927

from which

- A juniper 8 ins. in diam. bears N75 $\frac{1}{2}$ °W. 188 lks. dist., marked $\frac{1}{4}$ S19 BT.
- A juniper 8 ins. in diam. bears S29 $\frac{1}{2}$ °E. 276 lks. dist., marked $\frac{1}{4}$ S30 BT.
- Ascend 50 ft. over W. slope.
- 38.90 Top of spur bears N.
- Descend 20 ft. over E. slope.
- 40.40 Ravine course NW.
- Ascend 25 ft. over SW. slope
- 62.00 Top of spur bears N.
- Descend 202 ft. over E. slope.
- 70.50 Ravine course NW.
- Ascend 189 ft. over rocky SW. slope.
- 76.80 The cor. of secs. 19, 20, 29, and 30.

Land, mountainous.
Soil, stony 3 rd. and 4 th. rate.
Timber, juniper,
Undergrowth, oak and juniper brush.

- NO°2'W. bet. secs. 19 and 20.
- Ascend 100 ft. over SW. slope over stony mountainous land, thru scattering palo verde and juniper timber and dense oak brush undergrowth.
- 23.00 Top of spur bears NW.
- Descend 219 ft. over NE. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$
S19 | S20

1927

- No bearing trees within limits.
- Raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high W. of cor.
- A spring bears S87 $\frac{1}{2}$ °W. 17.00 chs. dist.
- 52.60 Road at foot of descent in Cherry Creek wash, bears E. and W.
- 53.20 Center of Cherry Creek Wash 100 lks. wide course E.
- 59.30 Wash course E.
- Ascend 20 ft. over SE. slope.
- 65.00 Top of spur bears E., State Highway from Prescott to Camp Verde Ariz. bears E. and W. on spur.
- Descend over N. slope.
- 67.30 Wash course NE.
- Ascend over SE. slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in the ground for cor. of secs. 17, 18, 19, and 20. marked on brass cap

Survey of Part (Completion) of
the Subdivision lines of Township 14 North., Range 4 East.

Chains

T14N	R4E
S18	S17
S19	S20

1927

from which

- A juniper 6 ins. in diam. bears N63 $\frac{1}{2}$ °E.138 lks. dist., marked T14N.,R4E.,S17 BT.
- A juniper 6 ins. in diam. bears S77°E.,50 lks. dist., marked T14N.,R4E.,S20 BT.
- A pinion 8 ins. in diam. bears S59 $\frac{1}{2}$ °W.111 lks. dist., marked T14N.,R4E.,S19 BT.
- A juniper 12 ins. in diam. bears N52 $\frac{1}{2}$ °W.55 lks. dist., marked T14N.,R4E.,S18 BT.

Land, mountainous.
Soil, stony 3 rd. rate.
Timber, palo verde, pinion, and juniper.
Undergrowth, oak brush.

- 40.00 East on a random line bet. secs. 17 and 20.
- Set temp. sec. cor.
- 79.90 Intersect N. and S. line 10 lks. S. of the cor. of secs. 16, 17, 20, and 21.
- Thence S 89°56'W. on true line bet. secs. 17 and 20.
- Ascend gradually over SE. slope over rolling stony land. thru. scattering timber and brush undergrowth.
- 27.30 State Highway from Prescott to Jerome and Camp Verde Ariz. bears NE. and SW.
- Top of spur bears NE.
- Descend over NW. slope. 78 ft.
- 34.90 Foot of descent in flat along Cherry Creek Wash.; enter level gravelly land bears NE. and SW.
- 39.50 Cherry Creek Wash 50 lks. wide 4 ft. deep course NE.
- 39.95 Set an iron post 3 ft. long 1 in. in diam. 27 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

S 17
$\frac{1}{4}$ S 20

1927

from which

- A willow 8 ins. in diam. bears N7 $\frac{1}{2}$ °E.125 lks. dist., marked $\frac{1}{4}$ S17 BT.
- A hackberry 6 ins. in diam. bears S57°E.80 lks. dist., marked $\frac{1}{4}$ S20 BT.
- 45.90 Leave bottom land along Cherry Creek bears NE. and SW. Ascend 128 ft. over SE. slope over rolling mountainous land.
- 48.50 State Highway from Prescott to Camp Verde Ariz. bears NW. and SW.
- 51.10 Same Highway bears NE. and SW.
- 52.90 Wash course NE.
- 55.90 Same wash in bend from SW. to SE.
- 79.90 Top of ridge bears NE. and SW.
- Descend over NW. slope.
- 74.90 Head of drain course NE.
- Ascend 34 ft. over SE. slope to
- 79.90 The cor. of secs. 17, 18, 19, and 20.

Land, rolling and mountainous.
Soil, stony and gravelly 3 rd. rate

Survey of Part (Completion) of
the Subdivision lines of Township 14 North., Range 4 East.


Chains	Timber, scattering palo verde, willow, juniper, and mesquite. Undergrowth, oak, greasewood and juniper brush.
40.00 76.80	S 89°54'W. on a random line bet. secs. 18 and 19. Set temp. $\frac{1}{4}$ sec. cor. Intersect W. bdy. of Tp. 9 lks. S. of the cor. of secs. 18 and 19. hereinbefore described.
6.80 11.50 15.80	Thence N 89°58'E. on true line bet. secs. 18 and 19. Descend 180 ft. over rocky SE. slope over mountainous land thru scattering timber and undergrowth. Wire fence bears NE. and SW. Ravine 15 lks. wide course NE. Ascend 20 ft. over SE. slope. Top of spur bears NE. Descend 142 ft. over SE. slope. Ravine 15 lks. wide course NE. Ascend over NW. slope.
27.30 34.80 36.80	Top of gravel spur bears N. Descend 30 ft. over E. slope. Set an iron post 3 ft. long, 1 in. in diam. 27 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{S 18}{S 19}$ 1927
	from which
38.00	A pinion 8 ins. in diam. bears N 87 $\frac{1}{2}$ ° E. 160 lks. dist., marked $\frac{1}{4}$ S18 BT. A pinion 8 ins. in diam. bears S 53 $\frac{1}{2}$ ° W. 204 lks. dist., marked $\frac{1}{4}$ S19 BT.
41.60	Sand wash course NE. Ascend 56 ft. over NW. slope. Top of ascent on spur bears NE. thence over rolling stony land on top of spur.
50.30 53.20	Descend over SE. slope. Ravine course N 60° E. Ascend over NW. slope.
55.26	Wire fence bears NW. and S. Descend over SE. slope.
62.20 74.70 76.80	Ravine course NE. Head of ravine course N., thence over rolling N. slope The cor. of secs. 17, 18, 19, and 20
	Land, mountainous. Soil, stony 3 rd. rate. Timber, juniper, pinion, and palo verde. Undergrowth, oak and juniper and catclaw brush.
13.63	N 0°2'W., on true line, on W. bdy. of sec. 17. Descend 70 ft. over N. slope over rolling stony mountainous land, thru scattering timber and dense undergrowth.
27.00	Ravine course N 60° E. Ascend 44 ft. over SE. slope. Top of spur bears NE.
38.00	Descend over NE. slope. Rocky ravine course NW. Ascend over SW. slope.

Survey of Part (Completion) of

the Subdivision lines of Township 14 North, Range 4 East

chains
40.00

Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 17 and 18, marked on brass cap




from which

A juniper, 18 ins. in diam., bears N. 82° E., 61 lks. dist., marked $\frac{1}{4}$ S17 BT

A juniper, 18 ins. in diam., bears N. 40 $\frac{1}{2}$ ° W., 49 lks. dist., marked $\frac{1}{4}$ S18 BT

- 41.52 Ascend 15 ft. over SW. slope.
Top of spur, bears W.
Descend 106 ft. over NW. slope.
- 49.00 Wash, 40 lks. wide, course E.
Ascend 100 ft. over S. slope.
- 57.50 Top of spur, bears E.
Descend 25 ft. over rolling NE. slope.
- 62.00 Old road, bears NE. and SW.
- 66.30 Drain, course E.
Ascend 45 ft. over SE. slope.
- 75.00 Top of ridge, bears NE. and SW.
Descend 40 ft. over NW. slope.
- 77.50 Descend gradually over W. slope to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground, for cor. of secs. 7 and 18 only, marked on brass cap,



1927

No bearing trees available.
Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

- Continue line and measurement.
- Descend along W. slope.
- 85.00 Ascend 52 ft. over SW. slope.
- 89.95 Top of spur, bears NW.
Descend 64 ft. over NE. slope to
- 94.78 Intersect North bdy. of sec. 17, surveyed due West.
Cor. of sec. 17 only (NW. cor.) established at this point as hereinafter described.

Land, rolling and mountainous.
Soil, rocky, 3rd and 4th rate.
Timber, cedar, oak and juniper.
Undergrowth, scrub oak and mesquite.

-
- From reestablished cor. of secs. 16 and 17,
West, on true line, on N. bdy. of sec. 17.
Over rolling land, along N. slope, thru scattering timber and undergrowth.
 - 0.73 Old road, bears NE. and SW.
 - 1.53 Drain, course N.
 - 9.65 Descend 35 ft. over NW. slope.
 - 14.92 Wash, course NE.
Ascend gradually over NE. slope.
 - 18.15 Wash, 70 lks. wide, 4 ft. deep, course NE.
Ascend gradually over SE. slope.
 - 24.51 Electric power transmission line, from Fossil Creek to

Survey of Part (Completion) of

the Subdivision lines of Township 14 North, Range 4 East

chains	Jerome, Arizona, bears NW. and SE.
28.00	Telephone line, bears NW. and SE.
29.55	Bend in wash, course SE. from SW.
	Continue gradual ascent over SE. slope.
35.53	(40.00 chs. W. from SE. cor. of sec. 8) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 8 only, marked on brass cap
	$\frac{1}{4}$ S 8
	1927
	No bearing trees available, Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
39.91	Ascend 20 ft. over E. slope to (Midpoint of N. bdy. of sec. 17) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 17 only, marked on brass cap
	$\frac{1}{4}$ S 17
	1927
	No bearing trees available. Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, S. of cor.
57.88	Ascend 125 ft. over E. slope. Top of gravelly spur, bears S. Descend 40 ft. over SW. slope.
62.53	Head of drain, course SE. Ascend 50 ft. over E. slope.
69.55	Top of ridge, bears N. and S. Descend 52 ft. over W. slope to
73.50	Foot of descent, at E. edge of draw. Thence over nearly level land in bottom of draw, course N.
77.69	(82.16 chs. W. from SE. cor. of sec. 8) Intersect random W. bdy. of sec. 8 run S. 0° 4' W. from cor. of secs. 5, 6, 7 and 8. Cor. of secs. 7 and 8 established at this point as hereinafter described.
	Continue line and measurement, across nearly level bottom of draw, course N.
79.20	W. edge of draw, bears N. and S. Leave draw and enter mountainous land. Ascend 12 ft. over NE. slope to
79.82	Intersect W. bdy. of sec. 17 surveyed N. 0° 2' W. At this point, set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground, for cor. of sec. 17 only (NW. cor.), marked on brass cap
	T14N R4E
	S7 S17
	1927
	from which A juniper, 18 ins. in diam., bears S. 23° E., 135 lks. dist., marked T14N R4E S17 BT A palo verde, 6 ins. in diam., bears S. 54° E., 138 lks. dist., marked T14N R4E S17 BT
	Land, rolling. Soil, sandy, gravelly and rocky, 3rd rate. Undergrowth, greasewood and scrub oak. Timber, paloverde and juniper.
40.00	From cor. of secs. 7 and 18, S. 89° 58' W., on random line, on N. bdy. of sec. 18.
76.78	Set temp. $\frac{1}{4}$ sec. cor. of sec. 18. (78.90 chs. in departure from cor. of secs. 7 and 8) Intersect W. bdy. of Tp. 9 lks. S. of cor. of secs. 7 and 18, hereinbefore described, Thence S. 89° 58' E., on true line, on N. bdy. of sec. 18.

Survey of Part (Completion) of
the Subdivision lines of Township 14 North, Range 4 East

chains Over gently rolling land, thru scattering undergrowth.
 Descend gradually over E. slope to
 9.38 Drain, course N. Ascend slightly over NW. slope.
 12.28 Old road, bears NW. and SE. Descend over NE. slope.
 18.78 Rocky draw, course NE. Continue descent over NE. slope
 36.78 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins.
 in the ground, with a stone marked with a cross (X)
 deposited at base of post, for $\frac{1}{4}$ sec. cor. of sec.
 18 only, marked on brass cap

$\frac{1}{4}$ S18

1927

38.90 Descend slightly over N. slope to
 (40.00 chs. in W. departure from cor. of secs. 7 and 8)
 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins.
 in the ground, with a stone marked with a cross (X)
 deposited at base of post, for $\frac{1}{4}$ sec. cor. of sec.
 7 only, marked on brass cap

$\frac{1}{4}$ S7

1927

60.28 Descend gradually over N. slope.
 Wash, course N.
 Ascend 34 ft. over W. slope.
 68.28 Top of spur, bears NW. Descend 30 ft. over NE. slope.
 75.25 Head of ravine, course NW.
 Ascend 40 ft. over W. slope to
 76.78 Intersect the cor. of secs. 7 and 18, on the W. bdy. of
 sec. 17.

Land, rolling.
 Soil, gravelly and stony, 3rd rate.
 Timber, none.
 Undergrowth, greasewood and scrub oak.

From the reestablished cor. of secs. 5, 6, 7 and 8,
 S.0° 4' W., on random line, on W. bdy. of sec. 8.
 40.00 Set temp. $\frac{1}{4}$ sec. cor. of sec. 8.
 85.20 Intersect the N. bdy. of sec. 17 at a point 2.13 chs. E.
 from NW. cor. of said sec.
 At this point of intersection, set an iron post, 3 ft.
 long, 2 ins. in diam., 28 ins. in the ground, for
 cor. of secs. 7 and 8 only, marked on brass cap

T14N R4E

S 7 | S 8

S 17

1927

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
 Thence,
 N.0° 4' E., on true line, on W. bdy. of sec. 8.
 Over gently rolling land, thru scattering undergrowth.
 4.50 Wash, 10 lks. wide, course NW.
 10.00 Center of draw, 5.00 chs. wide, course NW.
 Enter scattering timber. Asc. 23 ft. over SW. slope.
 15.20 Top of hill. Descend 70 ft. over NW. slope to
 24.20 Foot of hill. Desc. gradually over W. slope to
 25.22 (40.00 chs. in N. latitude from cor. of secs. 7 and 18)
 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in
 the ground, for $\frac{1}{4}$ sec. cor. of sec. 7 only, marked

Survey of Part (Completion) of
the Subdivision lines of Township 14 North, Range 4 East

chains	<p style="text-align: center;">on brass cap</p> <p style="text-align: center;">¼ S7</p> <p style="text-align: center;">1927</p> <p>Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.</p> <p>Descend gradually over NW. slope.</p> <p>26.30 Drain, course NW.</p> <p>45.20 (40.00 chs. S. 0° 4' W. from cor. of secs. 5, 6, 7 and 8) Set an iron post, 3 ft. long, 1 in. in diam., 17 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, and raise a mound of stone around post, for ¼ sec. cor. of sec. 8 only, marked on brass cap</p> <p style="text-align: center;">¼ S8</p> <p style="text-align: center;">1927</p> <p>Descend gradually over NW. slope.</p> <p>49.20 Wash, 10 lks. wide, 10 ft. deep, course NE. Leave rolling and enter nearly level land sloping slightly to the NE.</p> <p>60.40 Wash, 15 lks. wide, 4 ft. deep, course NE. A road in this wash bears NE. and SW.</p> <p>65.10 Telephone line, bears NW. and SE.</p> <p>68.60 Electric power transmission line, from Fossil Creek to Jerome Ariz., bears NW. and SE.</p> <p>75.70 Old road, bears E. and W.</p> <p>80.00 Wash, 150 lks. wide, 10 ft. deep, course NE.</p> <p>85.20 Intersect the cor. of secs. 5, 6, 7 and 8.</p> <p>Land, rolling and nearly level. Soil, gravelly and stony, 2nd and 3rd rate. Timber, palo verde, pinion and juniper. Undergrowth, greasewood, scrub oak and juniper.</p>
--------	--

GENERAL DESCRIPTION.

The portion of T. 14 N., R. 4 E. surveyed and subdivided as described in the foregoing notes has nearly every variety of surface, from level mesas to rough mountains. The elevation is highest in the vicinity of the southwest corner of the township, and slopes in a northeasterly direction toward the center.

The drainage of the township is entirely into the Verde River, which passes thru the eastern part; in a southeasterly direction. The portion of the township described in the foregoing notes drains northeasterly thru Cherry Creek Wash, and numerous smaller washes and ravines.

The soil of the level and rolling surface is for the most part a gravelly clay loam, 2nd rate in character, although there is some 1st rate sandy soil in the bottom land, along Cherry Creek Wash in sec. 16.

The soil of the mountainous surface is mostly of a volcanic nature and can nearly all be classed as 3rd rate in character. The Cherry Creek Wash has a flowing stream of water part of the year, and there is a spring in the SE. quarter of sec. 19.

The township is poorly timbered with a scattering growth of mesquite, palo verde and catclaw over the lower portions, and juniper, cedar, pinion and oak over the mountainous portions. There are no mineral or valuable stone deposits in this part of the township.

The proprietor of the store and filling station in the SW. quarter of sec. 10. is the only settler in the township. All portions of the township, except the extreme southwestern part, are accessible to vehicular transportation.

Survey of Part (Completion) of the
 Subdivision lines of Township 14 North., Range 4 East.

BOOK 3851

Chains

over the State Highway leading from Prescott to Camp Verde and Jerome Ariz. and numerous branch roads which follow the spurs and washes from the highways back to the more heavily timbered portions of the township.

The major portion of the land in the township is covered with a good growth of different kinds of grass which affords good pasture for cattle and horses, and naturally adapts the township to stock raising.

FINAL TESTS OF INSTRUMENTS.

Buff Transit No.16724

November 16, 1927. Set up instrument on the meridian established Nov. 5, 1927 at camp near the $\frac{1}{2}$ sec. cor. of secs. 10 and 15, T14N., R4E., and at 10^h00^m a.m., app. time, Set off 34°37'N. on the lat. arc, 18°35½'S. on the decl. arc and determine a meridian with the solar which agrees with the true meridian.

At the same station at 1^h00^m p.m., app. time with the lat. arc unchanged, Set off 18°38'S. on the decl. arc and determine a meridian with the solar, which falls 1'30"W. of the true meridian.

Young and Sons Transit No. 8478.

November 27, 1927. At same station, Set off 34°37'N. on the lat. arc 21°00'S. on the decl. arc and at 9^h00^m a.m. app. time determine a meridian with the solar, which falls 0½'E. of the true meridian

At apparent noon at same station, with the lat. arc unchanged, observe the sun on the meridian and obtain a reading of 21°02½'S. on the decl. arc, which is a little lower than the computed declination of the sun for this hour.

At 3^h00^m p.m., app. time with the lat arc unchanged, Set off 21°05'S. on the decl. arc and determine a meridian with the solar, which falls 1' W. of the true meridian.

As all the solar observations made with each instrument during the usual hours of solar work come within 1'30" of the true meridian established by the Polaris observations, conclude that each instrument has maintained a satisfactory adjustment.

4-680

FIELD ASSISTANTS.
To

CHARLES E. HUNTER U.S. Transitman

NAMES.	CAPACITY.
James Shine	1st Chainman
A.L. Bailey	2nd Chainman
Vern Liebman	Flagman
A.D. Cathers	Moundman
Otis Eastman	Axman

BOOK 3851

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Charles E. Hunter U.S. Transitman, hereby certify upon honor that, in pursuance supplemental of special instructions received from the District Cadastral Engineer, for Group 140, Arizona

bearing date of the 15th day of March, 1927, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, resurveyed all those parts or portions of

the Subdivision lines of Township 14 North, Range 4 East

and surveyed all those parts or portions of

the South and West Boundaries and

Subdivision Lines of

Township 14 North, Range 4 East of the Gila and Salt

River Base and Meridian, in the State of Arizona, which are represented in and by diagram on page 2 hereof

the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said resurvey and survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer, for Group 140, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such resurvey and survey.

Place: San Francisco, Calif.

Charles E. Hunter U.S. Transitman

Date: November 20, 1928.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

10

The foregoing field notes of the survey of

executed by

under his special instructions dated 10, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Surveyor General

I certify that the foregoing transcript of the field notes of the above described surveys in

has been correctly copied from the original notes on file in this office.

U. S. Surveyor General

BOOK 3851

4-680
(August, 1926)

FIELD ASSISTANTS.
TO

SIDNEY E. BLOUNT, U.S. Cadastral Engineer

NAMES.	CAPACITY.
Thomas Tait	1st Chainman
Dan McMurtrie	2nd Chainman
Lloyd Minter	Flagman
Glenn Thomas	Moundman

BOOK 3851

CERTIFICATE OF UNITED STATES SURVEYOR.

I, **Sidney E. Blout** U.S. Cadastral Engineer, hereby certify upon honor that, in pursuance of ^{supplemental} special instructions received from the District Cadastral Engineer, for **Group 140, Arizona**, bearing date of the **15th** day of **March**, 1927, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, ~~resurveyed~~ **surveyed** all those parts or portions of **the West and North boundaries of the Camp Verde Military Reservation (abandoned) and the Subdivision Lines of Township 14 North, Range 4 East** and ~~surveyed~~ **surveyed** all those parts or portions of **the Subdivision Lines of** of the **Gila and Salt**

River Base and Meridian, in the State of **Arizona**, which are represented in and by diagram on page 2 hereof the foregoing field notes ^{as having been executed by me, and under my direction;} and that all the corners of said ~~resurvey~~ **survey** and survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer, for **Group 140, Arizona**, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such ~~resurvey~~ **survey** and survey.

Place: **Phoenix, Arizona.**

Date: **Sept. 27, 1928.**

Sidney E. Blout
U.S. Cadastral Engineer.

APPROVAL.

OFFICE OF U. S. SUPERVISOR OF SURVEYS,

Denver, Colo., November 8, 1929.

The foregoing field notes of the ~~resurvey~~ **survey** of **the West bdy. and Part of the North bdy. of the Camp Verde Military Reservation (abandoned) and Part of the Subdivision lines of Township 14 North, Range 4 East, and of the survey of Part (completion) of South bdy., Part (completion) of West bdy., and Part (completion) of the Subdivision lines of Township 14 North, Range 4 East of the Gila and Salt River Base and Meridian in the State of Arizona,**

executed by **Sidney E. Blout, U.S. Cadastral Engineer** and **Charles E. Hunter, U.S. Transitman** under ^{supplemental} special instructions dated **March 15, 1927, for Group 140, Arizona**, , having been critically examined, and the necessary corrections and explanations made, the said field notes, and the ~~resurveys~~ **surveys** they describe, are hereby approved.

Quinn T. Johnson
U. S. Supervisor of Surveys.

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~
~~has been correctly copied from the original notes on file in this office.~~

~~U. S. Supervisor of Surveys.~~