

FIELD NOTES

OF THE SURVEY OF THE

East Boundary

of

Subdivision Lines of

Township 6 North, Range 8 West

OF THE ALTERATION OF

Corner Monuments on East Boundary of

Township 6 North, Range 9 West

AND OF THE ESTABLISHMENT OF

quarter-section corners on West Boundary of

Township 6 North, Range 8 West

Of the Gila and Salt River Base & Meridian,

In the State of Arizona.

EXECUTED BY

Dupree B. Averill

In the capacity of U. S. Surveyor, under Special Instructions dated October 23, 1928, issued by the District Cadastral Engineer to govern surveys included in Group No. 156, Arizona, which were approved by the Commissioner of the General Land Office, November 12, 1928, and Assignment Instructions dated Jan. 5, 1929.

Survey commenced January 11, 1929

Survey completed January 25, 1929

3878


3878

1A

Book "A"
 Group 156 Arizona
 Index Diagram

BOOK 3878

INDEX DIAGRAM.

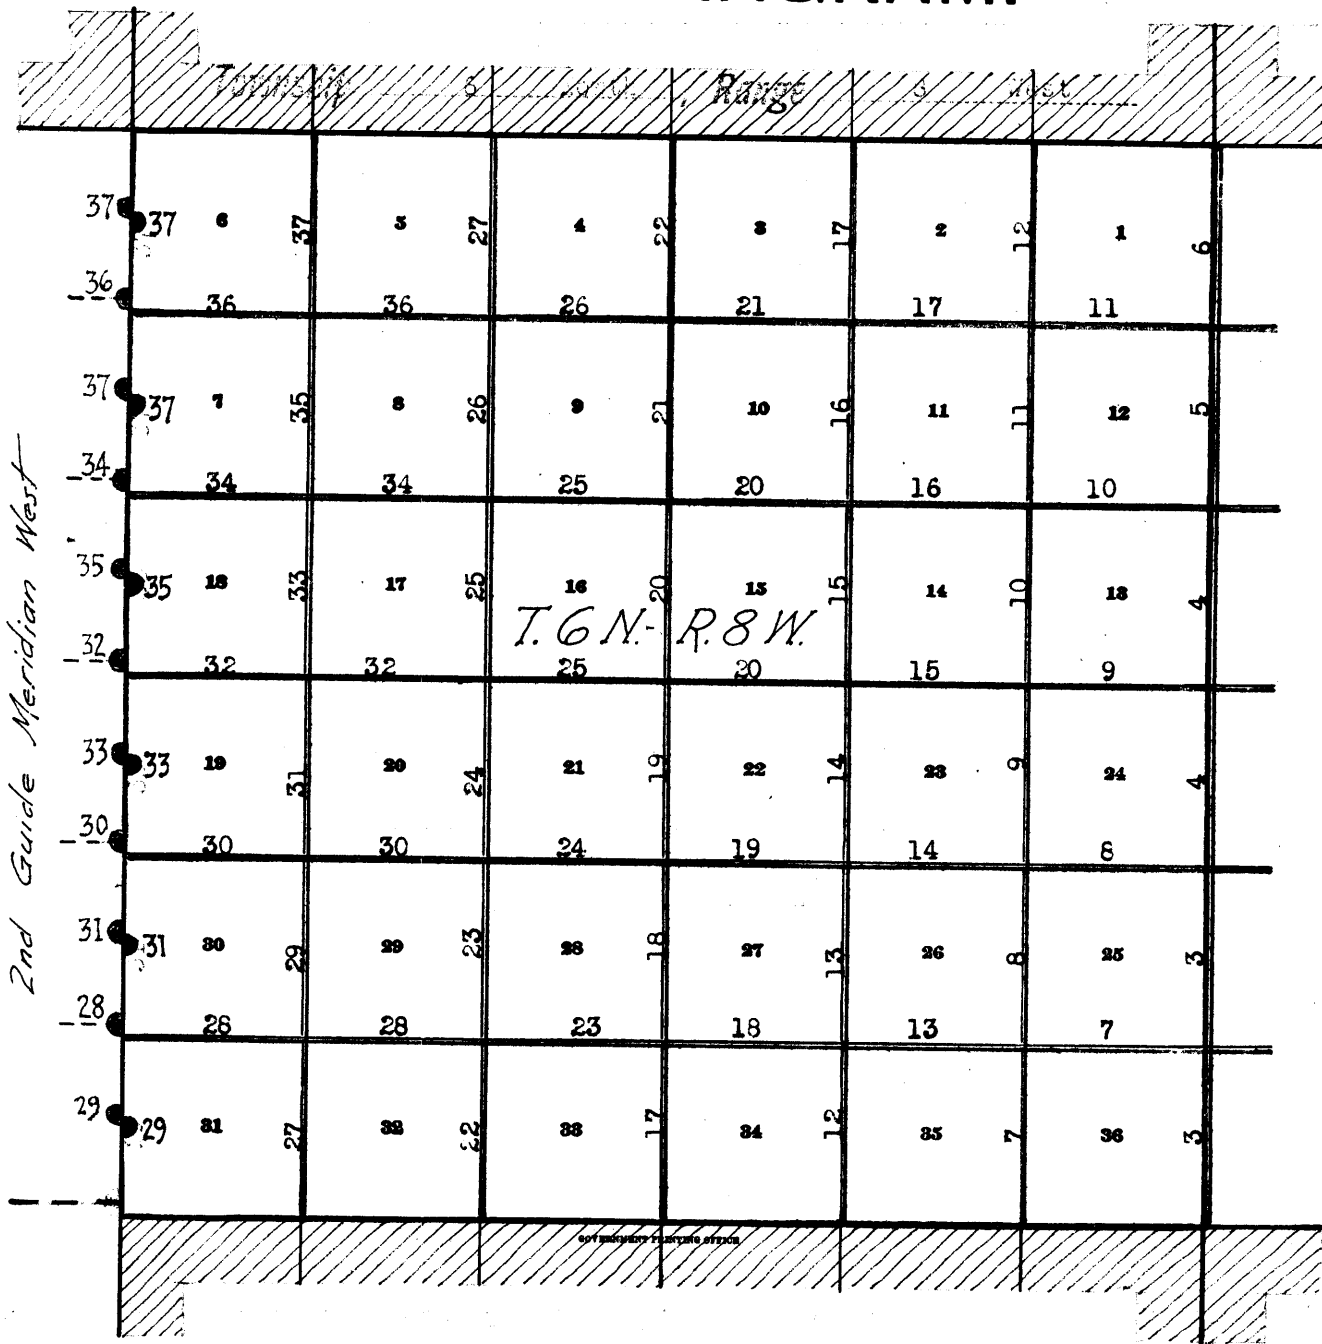

- Surveyed under this group.
- Accepted surveys.
- Unsurveyed.
- Areas surveyed as per accepted plats on file.
- Corner monuments on E. bdy. of T.6N., R.9W. altered as described herein.
- Quarter-sec. cor. monuments on W. bdy. of T.6N., R.8W. established as described herein.

Township 6 North, Range 8 West

DATE DIAGRAM

DATE 1929

Surveyed by J.F.Hesse U.S.T. in 1911 under Gp. No. 4

Surveyed by A.N.Oliver U.S.T. in 1911 under Gp. No. 4

Jan. 23	6	5	4	3	2	1
Jan. 23	23	24	24	24	25	25
Jan. 23	7	8	9	10	11	12
Jan. 23	23	23	22	21	20	20
Jan. 23	18	17	16	15	14	13
Jan. 22	22	22	21	20	16	15
Jan. 22	19	20	21	22	23	24
Jan. 21	21	21	20	16	15	14
Jan. 21	30	29	28	27	26	25
Jan. 17	17	20	16	15	14	14
Jan. 17	31	32	33	34	35	36

Surveyed by R.J.Gill, U.S.S. in 1916 under Gp. No. 59

All surveys executed in January, 1929.

— Surveyed by D.R.Averill, U.S.S. in January 1929 on dates shown thereon.

— Accepted surveys.

● Corner monuments altered by D.R.Averill, U.S.S. on dates shown in green (1929).

● Quarter sec. cors. established on W. bdy. of T. 6 N. R. 8 W. by D.R.Averill, U.S.S. on dates shown in red (1929).

The surveys herein described were executed on the dates shown on diagram on page 1 hereof, by Dupree R. Averill U.S. Surveyor, using Buff & Buff transit No. 17992. The transit is equipped with full vertical circle, and Smith Solar Attachment.

The instrument was approved by the District Cadastral Engineer conditional upon satisfactory field tests.

Unless otherwise specified all azimuth determinations are accomplished with the solar attachment. All measurements are made with a Lufkin 5-chain steel tape, first compared with a Lufkin standard steel tape and found correct. The measurements were made upon the slope, vertical angles determined by clinometer readings and the slope measurements reduced to their true horizontal equivalents for entry in the field notes.

Examine the adjustments of the transit and correct all errors, - then to test the solar apparatus by comparing its indications resulting from solar observations made during the morning and afternoon hours with a meridian determined by Polaris observation, proceed as follows:

January 9, 1929: At camp., in sec., 34, T.6 N., R.8 W., Gila and Salt River Base and Meridian, Arizona, in latitude $33^{\circ}49'30''$ N., longitude $113^{\circ}04'40''$ W., of Greenwich, at 6h. 22m. p.m., l.m.t., observe Polaris at upper culmination, making two observations, one each with the telescope in direct and reversed positions, and mark the meridian thus determined on a peg driven firmly in the ground about 10 chs., N.,

January 10, 1929: At 9h. 00m., a.m., app.t., set off $33^{\circ}49\frac{1}{2}'$ N. on the latitude arc, $21^{\circ}56'$ S., on the declination arc, and determine a meridian with the solar; which meridian agrees with the true meridian.

At app't., noon, with the latitude arc unchanged observe the sun upon the meridian. The resulting declination is $21^{\circ}55'$ S., which agrees with the computed declination.

At 3h. 00m., p.m., app.t., with the latitude arc unchanged, a setting of $21^{\circ}53\frac{1}{2}'$ S., on the declination arc, observe that the solar meridian coincides with the true meridian.

As all solar observations taken during the usual hours of solar work define meridians that agree within 1' of arc of the true meridian, conclude that the adjustments of the transit are satisfactory.

The instrument was tested at frequent intervals, and maintained in satisfactory adjustment throughout the survey.

Final test of transit 17992.

February 16, 1929: Upon the above noted meridian, at 4h. 00m. p.m. app.t., set off $33^{\circ}49\frac{1}{2}'$ N., on the latitude arc, $12^{\circ}11\frac{1}{2}'$ S. on the declination arc and observe that the solar meridian agrees with the true meridian.

February 17, 1929: At 9h. 00m., a.m., app.t., with the latitude arc unchanged, a reading of $11^{\circ}57\frac{1}{2}'$ S., on the declination arc note that the solar meridian agrees with the true meridian.

Survey of the East Boundary of T.6 N., R.8 W.

3878


From the cor., of Tps., 5 and 6 N., Rs., 7 and 8 W., North on random line setting temp., 1/4 and sec. cors., alternately at 40 and 80 chs., until at 484.80 chs., intersect the cor., of Ts. 6 and 7 N., Rs. 7 and 8 W.,

The cor., of Ts. 5 and 6 N., Rs., 7 and 8 W., is an iron post, 3 ins., diam., 30 ins., above ground, supported in a mound of stone, and properly marked on brass cap.


Thence

North on true line bet. secs., 31 and 36. Over mountainous land, thru scattered undergrowth. Asc., rocky S. slope 275 ft.,

- 7.00 Top of volcanic hill, spur slopes S., Desc., along NE. slope slope 480 ft.,
- 19.50 Sharp spur, slopes E., Change to N. slope.
- 38.00 Foot of hill, bears NE. and SW., Over rolling land, gradual descent.
- 40.00 Set an iron post, 3 ft. long, 1 in., diam., 12 ins., in the ground, to bedrock, with marked stone (X) alongside, supported in a mound of stone 3 ft. base, 2 ft. high, for 1/4 sec. cor., marked on brass cap




- 47.00 Desc., 50 ft., Drain, course NW.,
- 60.00 Drain, course W.,
- 62.25 Stub road from W., extends E. about half a mile.
- 80.00 Set an iron post, 3 ft. long, 2 ins., diam., 28 ins., in the ground, for the cor., of secs., 25, 30, 31 and 36, marked on brass cap



raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.,

Land: mountainous and rolling.
Soil: rock and gravel, 3rd. and 2nd. rate.
Timber: paloverde, mesquite.
Undergrowth: greasewood, cacti, catclaw.


- 10.00 North bet. secs., 25 and 30. Over rolling land, thru scattered undergrowth.
- 30.20 Flat divide, draining SW. and NE.,
- 32.00 Old road, bears E. and W.
- 32.00 Wash, 20 lks., wide, 10 ft. deep, in shallow draw, course SE. Asc., gradually.
- 40.00 Set an iron post, 3 ft. long, 1 in., diam., 18 ins., in the ground, to bedrock, with marked stone (X) alongside, supported in a mound of stone 3 ft. base, 1 1/2 ft. high, for 1/4 sec. cor., marked on brass cap



Survey of the East Boundary of T.6 N., R.8 W.

chains

67.20 Gully, course SW.
80.00 Set an iron post, 3 ft. long, 2 ins., diam., 30 ins. in the ground, for the cor., of secs., 19, 24, 25 and 30, marked on brass cap




1929

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor. Cor., falls in small gully, course W.

Land: desert bench.
Soil: rocky, 3rd. rate.
Timber: paloverde.
Undergrowth: greasewood, catclaw, cacti.


North bet. secs., 19 and 24.
Over broken land, thru scattered undergrowth.
Asc., gradually.

17.00 Wash, 20 lks., wide, in shallow draw, course S.20°W.
40.00 Set an iron post, 3 ft. long, 1 in., diam., 15 ins., in the ground, to bedrock, with marked (X) stone alongside, supported in a mound of stone 3 ft. base, 1 1/2 ft. high, for 1/4 sec. cor., marked on brass cap



1929

50.00 Small wash, course S.10°W.,
63.00 Stub road, from NE., extends SE.
80.00 Set an iron post, 3 ft. long, 2 ins., diam., 20 ins., in the ground, to bedrock, supported in a mound of stone, 3 ft. base, 12 ins., high, for the cor., of secs., 13, 18, 19 and 24, marked on brass cap



1929

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land: desert bench.
Soil: rocky, 3rd. rate.
Timber: paloverde and mesquite.
Undergrowth: catclaw, greasewood, cacti.

North bet. secs., 13 and 18.
Over desert bench, thru scattered undergrowth.

5.00 Drain, course SW.
29.00 Foot of mountain, bears NW and SE., Asc., SW. slope 130 ft.
40.00 Set an iron post, 3 ft. long, 1 in., diam., 15 ins., in the ground, to rock, with marked (X) stone alongside, supported in a mound of stone, 3 ft. base, 1 1/2 ft. high, for 1/4 sec. cor., marked on brass cap

Survey of the East Boundary of T.6 N., R.8 W.

BOOK 3878

chains

$\frac{1}{4}$
 S 13 | S 18
 1929

63.80 Asc., SW.slope 440 ft.,
 Top of flat volcanic hill, extends SE.,
 65.00 Desc., broken N. slope 400 ft.,
 80.00 Set an iron post, 3 ft. long, 2 ins., diam., 28 ins., in the
 ground, for the cor., of secs., 7, 12, 13 and 18, marked
 on brass cap

T 6 N
 R 8 W | R 7 W
 S 12 | S 7
 S 13 | S 18
 1929

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.,

Land: broken and mountainous.
 Soil: rocky, 3rd. and 4th. rate.
 Timber: paloverde.
 Undergrowth: greasewood, cacti, catclaw.

3.00 North bet. secs., 7 and 12.
 Over mountainous land, thru scattered undergrowth.
 Desc., N. slope 250 ft.,
 Gully, course N. 20° W.,
 32.50 Gully, course NW., Along rolling W. slope.
 40.00 Set an iron post, 3 ft. long, 1 in., diam., 28 ins., in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 S 12 | S 7
 1929

44.00 raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.,
 Over rolling foothills; Asc., 20 ft.,
 Small spur, slopes W., Desc., 50 ft.,
 70.00 Wash, 50 lks., wide, 2 ft. deep, course W.,
 Over desert land.
 80.00 Set an iron post, 3 ft. long, 2 ins., diam., 28 ins., in the
 ground, for the cor., of secs., 1, 6, 7 and 12, marked
 on brass cap

T 6 N
 R 8 W | R 7 W
 S 1 | S 6
 S 12 | S 7
 1929

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.,

Land: mountains and desert.
 Soil: rocky and gravelly, 3rd. and 2nd. rate.
 Timber: paloverde and mesquite.
 Undergrowth: greasewood, catclaw, cacti.

Survey of the East Boundary of T.6 N., R.8 W.

chains

North bet. secs., 1 and 6.

Over level desert, thru scattered undergrowth.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 30 ins., in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$

s 1 | s 6

1929

raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

51.00

Wash, 1.00 ch., wide, course W., Earth tank, bears E., 5.00 chs., dist.,

72.50

Small hill bears W., about 5.00 chs., dist., Low spur extends E.,

78.50

Stub road, extends SE.

84.80

The cor., of Ts. 6 & 7 N., Rs. 7 & 8 W., which is an iron post, 3 ins., diam., 8 ins., above ground, properly marked on brass cap.

A wire fence extends E., and W., from this cor.,

Land: desert.

Soil: rocky, 2nd. rate.

Timber: none.

Undergrowth: greasewood.

Survey of the Subdivisions of T.6 N., R.8 W.

BOOK 3878

chains

The cor., of secs., 1, 2, 35 and 36, on the S., bdy., of the Tp., is an iron post, 3 ins., diam., 24 ins., above ground, supported in a mound of stone, 3 ft. base, 2 ft. high, properly marked on brass cap, and witnessed by a mound of stone to the West.

Thence

N.0°01'W., bet. secs., 35 and 36.

Over broken hilly land, thru scattered undergrowth.

Along W. slope.


10.00 Desc., NW. slope 100 ft.,

12.00 Gully, course W.

15.00 Small spur, slopes NW.,

35.00 Across desert land.

40.00 Set an iron post, 3 ft. long, 1 in., diam., 26 ins., in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap




raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

47.00 Wash, course W.,

61.60 stub road, bears E. and W.,

80.00 Set an iron post, 3 ft. long, 2 ins., diam., 28 ins., in the ground, for the cor., of secs., 25, 26, 35 and 36, marked on brass cap



raise a mound of stone, 3 ft. base, 2 ft. high, W., of cor.,

Land: broken hills and desert.

Soil: rocky and sandy, 2nd. and 3rd. rate.

Timber: paloverde.

Undergrowth: greasewood and cacti.

East on random line bet. secs., 25 and 36.

40.00 Set temp., $\frac{1}{4}$ sec., cor.,

80.08 Fall 8 lks., S., of the cor., of secs., 25, 30, 31 and 36, on the E., bdy., of the Tp., hereinbefore described,


Thence

S.89°57'W., on true line bet. secs., 25 and 36.

Over desert land, thru scattered undergrowth.

25.00 Drain, course S.,

40.04 Set an iron post, 3 ft. long, 1 in., diam., 28 ins., in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

41.00 Wash, 10 lks., wide, course S.

59.70 Drain, course S.

80.08 The cor., of secs., 25, 26, 35 and 36.

Survey of the Subdivisions of T.6 N., R. 8 W.

chains

Land: rolling desert.
Soil: rocky, 2nd. rate.
Timber: none.
Greasewood, cacti.

N.0°01'W., bet. secs., 25 and 26.

Over desert land, thru scattered undergrowth.

4.10 Wash, 15 lks., wide, course SW.

40.00 Set an iron post, 3 ft. long, 1 in., diam., 26 ins., in the ground, for 1/4 sec. cor., marked on brass cap

1/4

S 26 | S 25

1929

raise a mound of stone, 3 ft. base, 2 ft. high W. of cor ,

Ascend gradually.

62.00 Shallow draw, course SW.

73.30 Old road, bears NW. and SE.

80.00 Set an iron post, 3 ft. long, 2 ins., diam., 12 ins., in the ground, to bedrock, with marked (X) stone alongside, supported in a mound of stone, 4 ft. base, 2 ft. high, for the cor., of secs., 23, 24, 25 and 26, marked on brass cap

T 6 N R 8 W

S 23 | S 24

S 26 | S 25

1929

Land: rolling desert.

Soil: rocky, 2nd., rate.

Timber: paloverde and mesquite.

Undergrowth: greasewood and cacti.

N.89°57'E., on random line bet. secs., 24 and 25.

40.00 Set temp., 1/4 sec. cor.,

80.04 Fall 5 lks., N., of the cor., of secs., 19, 24, 25 and 30, on the E. bdy., of the Tp., hereinbefore described,

Thence

S.89°59'W., on true line bet. secs., 24 and 25.

Desc., along gully, 30 ft.,

6.60 Gully, course SW.

11.00 Shallow draw, course S. Asc., 50 ft.,

25.00 Across flat bench.

40.02 Set an iron post, 3 ft. long, 1 in., diam., 16 ins., in the ground, to bedrock, with marked (X) stone alongside, supported in a mound of stone 3 ft. base, 1 1/2 ft. high, for 1/4 sec. cor., marked on brass cap

1/4 S 24
S 25

1929


Survey of the Subdivisions of T.6 N., R.8 W.

chains

65.00 Desc., gradually.
80.04 The cor., of secs., 23, 24, 25 and 26.


Land: broken desert.
Soil: rocky, 2nd. rate.
Timber: paloverde.
Undergrowth: greasewood and cacti.

N.0°01'W. bet. secs., 23 and 24.
Over desert land, thru scattered undergrowth.
1.50 Small draw, course SW. Asc., gradually.
37.00 Desc., 20 ft.,
40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins., in the ground, for 1/4 sec. cor., marked on brass cap



raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

41.70 Wash, course W.,
60.00 Swale, course SW., Asc., SE. slope 200 ft.,
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 10 ins., in the ground, to rock, with marked (X) stone alongside, supported in a mound of stone 4 ft. base, 2 ft. high, for the cor., of secs., 13, 14, 23 and 24, marked on brass cap




Land: desert and hilly.
Soil: rocky, 2nd. and 3rd. rate.
Timber: paloverde.
Undergrowth: greasewood, cacti, catclaw.

N.89°59'E. on random line bet. secs., 13 and 24.

40.00 Set temp., 1/4 sec. cor.,
80.04 Fall 9 lks., N., of the cor., of secs., 13, 18, 19 and 24, on the E. bdy., of the Tp., hereinbefore described.

Thence
N.89°57'W., on true line bet. secs., 13 and 24.
Over broken desert, thru scattered undergrowth.
Across flat, drains S.

4.00 Gully, course S.
7.50 Old road, bears NW. and SE.
20.00 Leave flat, drains NW. Asc., 50 ft.,
26.50 Low spur, extends NW. Desc., 50 ft.,
35.00 Draw, course N., Asc., 35 ft.,
40.02 Set an iron post, 3 ft. long, 1 in. diam., 10 ins., in the ground, to rock, with marked (X) stone alongside, supported in a mound of stone 4 ft. base, 2 ft. high, for 1/4 sec. cor., marked on brass cap



Survey of the Subdivisions of T.6 N., R.8 W.


chains

Asc., NE.slope 210 ft.,
 55.00 Change of slope to N.,
 58.50 Spur, slopes NW., Desc., W. slope 330 ft.,
 73.50 Draw, course S.20°W., Asc., 30 ft.,
 80.04 The cor., of secs., 13, 14, 23 and 24.


Land: desert and mountains.
 Soil: rocky, 2nd. and 3rd. rate.
 Timber: paloverde.
 Undergrowth: greasewood, catclaw, and cacti.

N.0°01'W., bet. secs., 13 and 14.

Over broken and hilly land, thru scattered undergrowth.
 Asc., SE.slope 85 ft.,
 5.20 Spur, connecting rocky hill to the W., saddle bears E.,
 about 5 chs., dist.,
 Desc., N. slope 220 ft.,
 6.25 Wire fencing, bears NE. and SW.
 24.70 Gully, course NW., Over rolling land.
 29.80 Old road, bears SW. and NE., on small spur, extending NW.
 30.00 Small cabin, bears S.65°W., about 8 chs., dist.,
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins., in the
 ground, to bedrock, with marked (X) stone alongside,
 supported in a mound of stone 4 ft. base, 2 ft. high,
 for $\frac{1}{4}$ sec. cor., marked on brass cap



Desc., NE.slope 25 ft.,
 43.20 Wash, 20 lks., wide, course W.,
 74.60 Drain, course W.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins., in the
 ground, for the cor., of secs., 11, 12, 13 and 14, marked
 on brass cap



1929

Raise a mound of stone, 3 ft. base, 2 ft. high, W., of cor.,

Land: hilly and desert.
 Soil: rocky, 2nd. rate.
 Timber: paloverde and mesquite.
 Undergrowth: greasewood, catclaw, cacti.


S.89°57'E., on random line bet. secs., 12 and 13.
 40.00 Set temp., $\frac{1}{4}$ sec. cor.,
 80.04 Fall 7 lks., S., of the cor., of secs., 7, 12, 13 and 18, on
 the E. bdy., of the Tp., hereinbefore described.

Thence
 West on true line bet. secs., 12 and 13.
 Over mountainous land, thru scattered undergrowth.
 0.70 Gully, course N. Asc., 50 ft.,
 5.00 Small spur, slopes N., Desc., along NW. slope 200 ft.,
 20.00 Change of slope to W., Small spur, slopes NW.,
 28.00 Gully, course SW., Along S. slope.
 31.00 Small spur, slopes SW., Desc., W. slope 70 ft.,
 40.02 Set an iron post, 3 ft. long, 1 in. diam., 12 ins., in the

Survey of the Subdivisions of T.6 N., R.8 W.

chains

ground, to rock, with marked stone (X) alongside, for 1/4 sec. cor., marked on brass cap



1929

80.04 Over desert land, gradual W. slope. The cor., of secs., 11, 12, 13 and 14.

Land: broken and hilly.
Soil: rocky, 2nd and 3rd. rate.
Timber: paloverde.
Undergrowth: greasewood, catclaw, cacti.

N.0°01'W., bet. secs., 11 and 12.


Over broken and rolling land, thru scattered undergrowth.

0.60 Wash, 15 lks., wide, course SW., Asc., 70 ft.,

20.00 Low spur, slopes SW.,

27.60 Drain, course NW.,

40.00 Set an iron post, 3 ft. long, 1 in., diam., 18 ins., in the ground, to bedrock, with marked stone (X) alongside, supported in a mound of stone, 3 ft. base, 1 1/2 ft. high, for 1/4 sec. cor., marked on brass cap



Desc., 20 ft.,


44.00 Wash, 1.00 ch., wide, course S.70°W.,

45.60 Old earth dam, extends NW. and SE., across wash.,

46.30 Wash, diversion flow, 1.00 chs., wide, course W.,

60.00 Over level desert.

80.00 Set an iron post, 3 ft. long, 2 ins., diam., 30 ins., in the ground, for the cor., of secs., 1, 2, 11 and 12, marked on brass cap



raise a mound of stone 2 ft. base, 1 1/2 ft. high, W. of cor.

Land: rolling desert.
Soil: rocky, 2nd. rate.
Timber: paloverde and mesquite.
Undergrowth: greasewood, cacti and catclaw.


East on random line bet. secs., 1 and 12.

40.00 Set temp., 1/4 sec., cor.,

79.96 Fall 14 lks., S., of the cor., of secs., 1, 6, 7 and 12, on the E., bdy., of the Tp., hereinbefore described.

Thence S.89°54'W., on true line bet. secs., 1 and 12.

39.98 Over desert land, thru scattered undergrowth. Set an iron post, 3 ft. long, 1 in., diam., 28 ins., in the ground, for 1/4 sec. cor., marked on brass cap



Survey of the Subdivisions of T.6 N., R.8 W.

chains

raise a mound of stone, 3 ft. base, 2 ft. high, N., of cor.

79.96 The cor., of secs., 1, 2, 11 and 12.

Land: level desert.
Soil: rocky, 2nd. rate.
Timber: none.
Undergrowth: greasewood.

North on random line bet. secs., 1 and 2

40.00 Set temp., 1/4 sec. cor.
84.82 Fall 3 lks., E., of the cor., of secs., 1, 2, 35 and 36, on the N., bdy., of the Tp., which is an iron post, 3 ins., diam., 10 ins., above ground, properly marked on brass cap.

Thence S. 0° 01' E., on true line bet. secs., 35 and 36
Over desert land, thru scattered undergrowth.

29:20 Drain, course SW.
40:40 Road, bears NE. and SW.
44.82 Set an iron post, 3 ft. long, 1 in. diam., 30 ins., in the ground, for 1/4 sec. cor., marked on brass cap

1/4

S 2 | S 1

1929

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

73.80 Drain, course SW.
84.82 The cor., of secs., 1, 2, 11 and 12.

Land: level desert.
Soil: gravelly and rocky, 2nd. rate.
Timber: none.
Undergrowth: greasewood, cacti.

The cor., of secs., 2, 3, 34 and 35, on the S., bdy., of the Tp., is an iron post, 3 ins., diam., 12 ins., above ground, properly marked on brass cap,

Thence N. 0° 01' W., bet. secs., 34 and 35.
Over rolling land, thru scattered undergrowth.

3.50 Gully, course E.,
10.50 Low spur, slopes E.,
17.50 Wash, course NE.,
23.50 Low spur, slopes E.,
40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins., in the ground, for 1/4 sec. cor., marked on brass cap

1/4

S 34 | S 35


1929

raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W., of cor.

40.40 Wash, course E.,
46.00 Low spur, slopes E., Meyers Well bears N. 31° W., about 12.00 chs., dist.,
53.70 Wash, 1.00 ch., wide, course SE.,

chains

- 56.20 Road, bears NW. and SE.,
- 60.30 Road, bears NE. and SW.
- 65.00 Over level desert.
- 80.00 Set an iron post, 3 ft. long, 2 ins., diam., 28 ins., in the ground, for the cor., of secs., 26, 27, 34 and 35, marked on brass cap



raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.


Land: rolling desert.
 Soil: gravelly and sandy, 1st. and 2nd. rate.
 Timber: paloverde.
 Undergrowth: greasewood, catclaw, cacti.

East on random line bet. secs., 26 and 35.

- 40.00 Set temp., 1/4 sec. cor.,
- 80.12 Fall 2 lks., 3., of the cor., of secs., 25, 26, 35 and 36.

Thence
 S. 89° 59' W., on true line bet. secs., 26 and 35.
 Over desert land, thru scattered undergrowth.

- 2.20 Wash, 15 lks., wide, course SW.,
- 38.50 Wash, 3.00 chs. wide, course S.,
- 40.06 Set an iron post, 3 ft. long, 1 in., diam., 28 ins., in the ground, for 1/4 sec. cor., marked on brass cap



1929

raise a mound of stone, 3 ft. base, 1 1/2 ft. high, N. of cor.

- 80.12 The cor., of secs., 26, 27, 34 and 35.

Land: desert.
 Soil: gravelly and sandy loam, 1st. rate.
 Timber: paloverde along washes.
 Undergrowth: greasewood.

N. 0° 01' W., bet. secs., 26 and 27.
 Over desert land, thru scattered undergrowth.

- 6.30 Road, bears NE. and SW.,
- 40.00 Set an iron post, 3 ft. long, 1 in., diam., 30 ins., in the ground, for 1/4 sec. cor., marked on brass cap



1929

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

- 80.00 Set an iron post, 3 ft. long, 2 ins., diam., 30 ins., in the ground, for the cor., of secs., 22, 23, 26 and 27, marked on brass cap

Survey of the Subdivisions of T.6 N., R.8 W.

chains

T 6 N R 8 W	
S 22	S 23
S 27	S 26

1929

raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land: level desert.
 Soil: sandy loam, 1st. rate.
 Timber: none.
 Undergrowth: greasewood.

N. $89^{\circ}59'E.$, on random line bet. secs., 23 and 26.
 Over desert land, thru scattered undergrowth.

40.00 Set temp., $\frac{1}{4}$ sec. cor.,
 80.16 Fall 9 lks., N., of the cor., of secs., 23, 24, 25 and 26.

Thence
 N. $89^{\circ}57'W.$, on true line bet. secs., 23 and 26.
 Over rolling desert land, thru scattered undergrowth.

3.40 Wash, course SW.,
 15.50 Old road, bears NW. and SE.
 40.08 Set an iron post, 3 ft. long, 1 in., diam., 28 ins., in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$	S 23
	S 26

1929

raise a mound of stone 3 ft. base, 2 ft. high, N., of cor.,

50.20 Desc., gradually.
 Wash, 20 lks., wide, course S.,
 71.85 Road, bears N. and S.
 80.16 The cor., of secs., 22, 23, 26 and 27.

Land: desert.
 Soil: gravelly and rocky, 2nd. rate.
 Timber: paloverde, mesquite.
 Undergrowth: greasewood, catclaw, cacti.

27.40 N. $0^{\circ}01'W.$, bet. secs., 22 and 23.
 Over desert land, thru scattered undergrowth.
 Dim road, bears NW. and SE (unused).
 40.00 Set an iron post, 3 ft. long, 1 in., diam., 30 ins., in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$	
S 22	S 23

1929

raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.,

74.10 Wire fence, bears E. and W.
 74.40 Roadway, bears E. and W.
 80.00 Set an iron post, 3 ft. long, 2 ins., diam., 30 ins., in the
 ground, for the cor., of secs., 14, 15, 22 and 23, marked
 on brass cap

T 6 N R 8 W	
S 15	S 14
S 22	S 23

1929

chains

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.,

Land: level desert, drains S.
Soil: gravelly, 1st. and 2nd. rate.
Timber: none.
Undergrowth: greasewood.


S. 89° 57' E., on random line bet. secs., 14 and 23.

40.00 Set temp., 1/4 sec. cor.,
80.14 Fall 4 lks., S. of the cor., of secs., 13, 14, 23 and 24.

Thence
N. 89° 59' W., on true line bet. secs., 14 and 23.
Over broken hills, thru scattered undergrowth.

7.75 Asc., SE. slope 115 ft.,
20.00 Rocky spur, slopes SW., Desc., W. slope 320 ft.,
Foot of hill. bears N. and S., Over rolling land,
gradual descent, 60 ft.,

40.07 Small wash, course S.,
Set an iron post, 3 ft. long, 1 in., diam., 28 ins., in
the ground, for 1/4 sec. cor., marked on brass cap



1929


raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.,

54.60 Wash, 30 lks., wide, course S.,
65.50 Road, bears N. and S.
80.14 The cor., of secs., 14, 15, 22 and 23.

Land: broken hills and rolling desert.
Soil: rocky and gravelly, 2nd. and 3rd. rate.
Timber: palo verde.
Undergrowth: greasewood, catclaw, cacti.

N. 0° 01' W. bet. secs., 14 and 15.


40.00 Over desert land, thru scattered undergrowth.
Set an iron post, 3 ft. long, 1 in., diam., 30 ins., in the
ground, for 1/4 sec. cor., marked on brass cap



1929

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.,

80.00 Set an iron post, 3 ft. long, 2 ins., diam., 30 ins., in the
ground, for the cor., of secs., 10, 11, 14 and 15, marked
on brass cap



1929

raise a mound of stone 2 ft. base, 1 1/2 ft. high, W. of cor.,

Land: level desert, drains S.
Soil: gravelly, 2nd. rate.
Timber: none.
Undergrowth: greasewood.

Survey of the Subdivisions of T.6 N., R.8 W.

chains

S.89°59'E., on random line bet.secs.,11 and 14.

40.00 Set temp., 1/4 sec.cor.;
80.14 Fall 7 lks., N. of the cor., of secs., 11, 12, 13 and 14.

Thence
N.89°56'W. on true line bet.secs., 11 and 14.
Over rolling land, thru scattered undergrowth.

0.30 Wash, 20 lks., wide, course SW.
11.10 Drain, course S.
31.45 Wash, 30 lks., wide, course S.
33.50 Gully, course S.,
40.07 Set an iron post, 3 ft. long, 1 in., diam., 12 ins., in the
ground to bedrock, with marked (X) stone alongside,
supported in a mound of stone 4 ft. base, 2 ft. high,
for 1/4 sec.cor., marked on brass cap.

1/4 S 11
S 14

1929

41.70 Drain, course S. Asc., E. slope 20 ft.,
45.00 Low spur, slopes SE., Desc., SW. slope 30 ft.,
60.50 Road, bears NW. and SE., Over level desert.
64.10 Wash, course S.,
80.14 The cor., of secs., 10, 11, 14 and 15.

Land: rolling and broken.
Soil: gravelly and rocky, 2nd. and 3rd. rate.
Timber: paloverde.
Undergrowth: greasewood, catclaw, cacti.

N.0°01'W. bet.secs., 10 and 11.
Over desert land, thru scattered undergrowth.

14.80 Old road (disused) bears NE. and SW.
16.20 Drain, course SW.
40.00 Set an iron post, 3 ft. long, 1 in., diam., 30 ins., in the
ground, for 1/4 sec.cor., marked on brass cap

1/4 S 10 S 11

1929

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.,

46.00 Drain, course W.
47.90 Wire fence, bears NE. and SW.
54.85 Road, bears NW. and SE.
59.50 Road, bears E. and W.
80.00 Set an iron post, 3 ft. long, 2 ins., diam., 30 ins., in the
ground, for the cor., of secs., 2, 3, 10 and 11, marked
on brass cap.

T 6 N R 8 W
S 3 S 2
S 10 S 11

1929

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.,

Land: desert.
Soil: gravelly and rocky, 2nd. and 3rd. rate.
Timber: none.
Undergrowth: greasewood.

chains S.89°56'E.on random line bet.secs.,2 and 11.
 40.00 Set temp., $\frac{1}{4}$ sec.cor.
 80.16 Fall 5 lks.,S.of the cor.,of secs.,1,2,11 and 12.
 Thence
 N.89°58'W., on true line bet.secs.,2 and 11.
 Over desert land,thru scattered undergrowth.
 38.00 Road, bears N. and S.
 40.08 Set an iron post,3 ft.long,1 in.,diam., 30 ins.,in the
 ground, for $\frac{1}{4}$ sec.cor., marked on brass cap

$$\frac{1}{4} \begin{array}{r} S 2 \\ S 11 \\ \hline 1929 \end{array}$$
 raise a mound of stone,2 ft.base,1 $\frac{1}{2}$ ft.high,N.of cor.
 58.10 Wire fence, bears NE. and SW.
 80.16 The cor.,of secs.,2,3,10 and 11.
 Land: level desert, drains W.
 Soil: gravelly and rocky, 2nd.rate.
 Timber: none.
 Undergrowth: greasewood.

N.0°05'W.on true line bet.secs.,2 and 3, objective cor.,
 visible.
 Over desert land,thru scattered undergrowth.
 40.00 Set an iron post,3 ft.long,1 in.,diam., 28 ins.,in the
 ground, for $\frac{1}{4}$ sec.cor., marked on brass cap

$$\frac{1}{4} \begin{array}{r} S 3 | S 2 \\ \hline 1929 \end{array}$$
 raise a mound of stone,2 ft.base,1 $\frac{1}{2}$ ft.high,W.of cor.
 64.10 Drain, course W.
 84.65 The cor.,of secs.,2,3,34 and 35, on the N.bdy.,of the Tp.,
 which is an iron post,3 ins.,diam.,10 ins.,above
 ground, properly marked on brass cap.
 Land: level desert, drains W.
 Soil: gravelly, 2nd.rate.
 Timber: none.
 Undergrowth: greasewood, cacti.

The corl,of secs.,3,4,33 and 34, on the S.bdy.,of the Tp.,
 is an iron post,3 ins.,diam.,10 ins.,above ground,
 properly marked on brass cap, and witnessed by a mound
 of stone to the W.
 Thence
 N.0°02'W. bet.secs.,33 and 34.
 Over desert land,thru scattered undergrowth.
 0.30 Drain, course E.
 29.00 Drain, course E.
 40.00 Set an iron post,3 ft.long,1 in.,diam.,30 ins.,in the
 ground, for $\frac{1}{4}$ sec.cor., marked on brass cap

$$\frac{1}{4} \begin{array}{r} S 33 | S 34 \\ \hline 1929 \end{array}$$
 raise a mound of stone,2 ft.base,1 $\frac{1}{2}$ ft.high,W.of cor.
 65.00 Drain, course NE.
 65.70 Road, bears NW. and SE.
 78.00 Drain, course NE.
 80.00 Set an iron post,3 ft.long,2 ins.,diam.,30 ins.,in the
 ground, for the cor.,of secs.,27,28,33 and 34,
 marked on brass cap

$$\begin{array}{r} T 6 N R 8 W \\ S 28 | S 27 \\ \hline S 33 | S 34 \\ \hline 1929 \end{array}$$
 raise a mound of stone 2 ft.base,1 $\frac{1}{2}$ ft.high,W of cor.

Survey of the Subdivisions of T.6 N., R.8 W.

chains Land: level desert, drains NE.
 Soil: sandy loam, 1st. rate.
 Timber: scattered paloverde.
 Undergrowth: greasewood, catclaw, cacti.

East on random line bet. secs., 27, and 34.

40.00 Set temp., $\frac{1}{4}$ sec. cor.,
 80.16 Fall 7 lks., N., of the cor., of secs., 26, 27, 34 and 35.

Thence
 N. $89^{\circ}57'W.$, on true line bet. secs., 27, and 34.
 Over desert land, thru scattered undergrowth.

3.35 Road, bears N. and S.
 16.35 Road, bears NW. and SE.
 16.65 Wire fence, bears NW. and SE.
 21.65 Wire fence, bears NE. and SW.
 29.70 Wash, 30 lks., wide, course SE.
 40.08 Set an iron post, 3 ft. long, 1 in., diam., 30 ins., in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

S 27
 S 34

1929

raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

55.35 Drain, course NE.
 63.15 Drain, course NE.
 69.50 Wire fence, bears NW. and SE.
 77.10 Drain, course NE.
 80.16 The cor., of secs., 27, 28, 33 and 34.

Land: desert.
 Soil: gravelly, 1st. rate.
 Timber: scattered paloverde.
 Undergrowth: greasewood.

N. $0^{\circ}02'W.$ bet. secs., 27 and 28.
 Over desert land, thru scattered undergrowth.

33.50 Drain, course E.
 40.00 Set an iron post, 3 ft. long, 1 in., diam., 30 ins., in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

S 28 | S 27

1929

raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.,

54.20 Drain, course SE.
 66.10 Road, bears NW. and SE.
 80.00 Set an iron post, 3 ft. long, 2 ins., diam., 30 ins., in the
 ground, for the cor., of secs., 21, 22, 27 and 28, marked
 on brass cap

T 6 N R 8 W
 S 21 | S 22
 S 28 | S 27

1929

raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Survey of the Subdivisions of T.6 N., R.8 W.

chains	<p>Land: level desert. Soil: loam, 1st. rate. Timber: none. Undergrowth: greasewood.</p> <hr/> <p>s. 89°57' E., on random line bet. secs., 22 and 27.</p> <p>40.00 Set temp., $\frac{1}{4}$ sec. cor., 80.18 Fall 5 lks., S. of the cor., of secs., 22, 23, 26 and 27.</p> <p>Thence N. 89°59' W., on true line bet. secs., 22 and 27. Over desert land, thru scattered undergrowth.</p> <p>40.09 Set an iron post, 3 ft. long, 1 in. diam., 30 ins., in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap</p> <div style="text-align: center;"> $\frac{1}{4} \begin{array}{l} S 22 \\ S 27 \end{array}$ <p>1929</p> <p>raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high N. of cor.</p> </div> <p>41.00 Drain, course SW. 58.00 Drain, course S. 80.18 The cor., of secs. 21, 22, 27 and 28.</p> <p>Land: level desert. Soil: loam, sandy and gravelly, 1st. rate. Timber: none. Undergrowth: greasewood.</p> <hr/> <p>N. 0°02' W. bet. secs., 21 and 22. Over desert land, thru scattered undergrowth.</p> <p>28.80 Wire fence, bears NE. and SW. 40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins., in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap</p> <div style="text-align: center;"> $\frac{1}{4} \begin{array}{l} S 21 S 22 \end{array}$ <p>1929</p> <p>raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.,</p> </div> <p>65.00 Old road (unused) bears NW. and SE. 79.00 Drain, course SW. 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins., in the ground, for the cor., of secs., 15, 16, 21 and 22, marked on brass cap</p> <div style="text-align: center;"> $\begin{array}{l} T 6 N R 8 W \\ S 16 S 15 \\ \hline S 21 S 22 \end{array}$ <p>1929</p> <p>raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.,</p> <p>Land: level desert. Soil: gravelly, 1st. rate. Timber: none. Undergrowth: greasewood.</p> <hr/> </div>
--------	--

Survey of the Subdivisions of T.6 N., R.8 W.

chains

S.89°59'E., on random line bet.secs.,15 and 22.

40.00

Set temp., $\frac{1}{4}$ sec.cor.,

80.20

Fall 4 lks., N. of the cor., of secs.,14,15,22 and 23.

Thence

N.89°57'W., on true line bet.secs.,15 and 22.

Over desert land, thru scattered undergrowth.

22.00

Wire fence, bears N., and S.,

40.10

Set an iron post, 3 ft.long, 1 in., diam., 30 ins., in the ground, for $\frac{1}{4}$ sec.cor., marked on brass cap
$$\begin{array}{r} \frac{1}{4} \\ \hline 3 \ 15 \\ 3 \ 22 \end{array}$$

1929

raise a mound of stone, 2 ft.base, $1\frac{1}{2}$ ft.high, N.of cor.,

80.20

The cor., of secs.,15,16,21 and 22.

Land: level desert; drains S.

Soil: gravelly and sandy, 1st1 rate.

Timber: none.

Undergrowth: mesquite.

N.0°02'W. bet.secs.,15 and 16.

Over desert land, thru scattered undergrowth.

5.50

Old road, disused, bears E. and W.

40.00

Set an iron post, 3 ft.long, 1 in., diam., 30 ins., in the ground, for the $\frac{1}{4}$ sec.cor., marked on brass cap
$$\begin{array}{r} \frac{1}{4} \\ \hline S \ 16 \ | \ S \ 15 \end{array}$$

1929

raise a mound of stone, 2 ft.base, $1\frac{1}{2}$ ft.high, W.of cor.

80.00

Set an iron post, 3 ft.long, 2 ins., diam., 30 ins., in the ground, for the cor., of secs.,9,10,15 and 16, marked on brass cap

$$\begin{array}{r} T \ 6 \ N \ R \ 8 \ W \\ \hline S \ 9 \ | \ S \ 10 \\ \hline S \ 16 \ | \ S \ 15 \end{array}$$

1929

raise a mound of stone, 2 ft.base, $1\frac{1}{2}$ ft.high, W.of cor.,

Land: desert, drains SW.

Soil: gravelly, 1st.rate.

Timber: none.

Undergrowth: greasewood, cacti, yucca.

S.89°57'E. on random line bet.secs.,10 and 15.

40.00

Set temp., $\frac{1}{4}$ sec.cor.,

80.48

Fall 4 lks., S. of the cor., of secs.,10,11,14 and 15.

Thence

N.89°59'W., on true line bet.secs.,10 and 15.

Over desert land, thru scattered undergrowth.

19.65

Wire fence, bears N., and S.

22.50

Wash, course SW.

40.09

Set an iron post, 3 ft.long, 1 in., diam., 30 ins., in the

Survey of the Subdivisions of T.6 N., R.8 W.

BOOK 3878

chains

ground, for 1/4 sec.cor., marked on brass cap

1/4 S 10
S 15

1929

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

80.18 The cor., of secs., 9, 10, 15 and 16.

Land: level desert, drains SW.
Soil: gravelly, 1st and 2nd. rate.
Timber: none.
Undergrowth: greasewood, cacti, yucca.

20.00 N. 0° 02' W., bet. secs., 9 and 10.
Over desert land, thru scattered undergrowth.
Asc., S. slope 50 ft.,
35.00 Low divide, bears NW. and SE., Desc., gradually.
40.00 Set an iron post, 3 ft. long, 1 in., diam., 26 ins., in the
ground, for 1/4 sec.cor., marked on brass cap

1/4
S 9 | S 10

1929

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

46.00 Shallow swale, drains W.,
60.00 Foot of hill, - asc. S. slope 140 ft.,
69.00 Top of conical hill, desc. N. slope 140 ft.,
80.00 Foot of hill; Set an iron post, 3 ft. long, 2 ins., diam.,
30 ins., in the ground, for the cor., of secs., 3, 4, 9
and 10, marked on brass cap

T 6 N R 8 W
S 4 | S 3
S 9 | S 10

1929

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.,

Land: desert, broken and hilly.
Soil: gravelly and rocky, 2nd. and 3rd. rate.
Timber: none.
Undergrowth: greasewood, catclaw, cacti.

S. 89° 59' E., on random line bet. secs. 3 and 10.

40.00 Set temp., 1/4 sec.cor.,
80.20 Fall 7 lks., S. of the cor., of secs., 2, 3, 10 and 11.

Thence
S. 89° 58' W., on true line bet. secs., 3 and 10.
Over desert land, thru scattered undergrowth.
40.10 Set an iron post, 3 ft. long, 1 in., diam., 30 ins., in the
ground, for 1/4 sec.cor., marked on brass cap

1/4 S 3
S 10

1929

raise a mound of stone 2 ft. base, 1 1/2 ft. high N. of cor.

Survey of the subdivisions of T.6 N., R.8 W.


chains

58.30 Old road, bears N.60°W., and S.60°E.,
80.20 The cor., of secs., 3, 4, 9 and 10.

Land: level desert, drains W.
Soil: sandy and gravelly, 1st. and 2nd rate.
Timber: scattered paloverde.
Undergrowth: greasewood, catclaw, cacti.

N.0°02'W., on true line bet. secs., 3 and 4; objective cor., visible.

2.10 Over level desert, thru scattered undergrowth.
40.00 Old road, bears E. and W.,
Set an iron post, 3 ft. long, 1 in. diam., 30 ins., in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.


84.59 The cor., of secs., 3, 4, 33 and 34, on the N., bdy., of the Tp. which is an iron post, 3 ins., diam., 10 ins., above ground, properly marked on brass cap.

Land: level desert, drains W.
Soil: gravelly, 2nd rate.
Timber: scattered mesquite.
Undergrowth: greasewood, cacti.

The cor., of secs., 4, 5, 32 and 33 on the S., bdy., of the Tp., is an iron post, 3 ins., diam., 10 ins., above ground, properly marked on brass cap.


Thence
N.0°02'W., bet. secs., 32 and 33.
Over level desert, thru scattered undergrowth.

11.00 Drain, course NE.
12.90 Old road, bears NW. and SE.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins., in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

65.00 Drain, course NE.
75.00 Old road, bears N.60°W. and S.60°E.
80.00 Set an iron post, 3 ft. long, 2 ins., diam., 30 ins., in the ground, for the cor., of secs., 28, 29, 32 and 33, marked on brass cap



raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high W. of cor.

Survey of the Subdivisions of T.6 N.,R.8 W.

BOOK 3878

chains


Land: desert, drains NE.
Soil: sandy loam, 1st.rate.
Timber: none.
Undergrowth: greasewood.

East on random line bet.secs.,28 and 33.

40.00 Set temp.,¹/₄ sec.cor.,
80.08 Fall 2 lks.,N., of the cor.,of secs.,27,28,33 and 34.

Thence
N.89°59'W., on true line bet.secs.,28 and 33.
Over desert land,thru scattered undergrowth.

40.04 Set an iron post,3 ft.long,1 in. diam., 30 ins.,in the
ground, for ¹/₄ sec.cor., marked on brass cap



1929


raise a mound of stone,2 ft.base,1¹/₂ ft.high, N.of cor.

42.70 Drain, course NE.
70.00 Drain, course NE.
80.08 The cor. of secs.,28,29,32 and 33.

Land: desert, drains NE.
Soil: loam, 1st.rate.
Timber: none.
Undergrowth: greasewood.

N.0°02'W., bet.secs.,28 and 29.


40.00 Over desert land,thru scattered undergrowth.
Set an iron post,3 ft.long,1 in.,diam., 30 ins.,in the
ground, for ¹/₄ sec.cor., marked on brass cap



1929

raise a mound of stone,2 ft.base,1¹/₂ ft.high, W.of cor.

67.00 Overflow wash, course NE.,
80.00 Set an iron post,3 ft.long, 2 ins.diam., 30 ins.,in the
ground, for the cor.,of secs.,20,21,28 and 29,
marked on brass cap



1929

raise a mound of stone,2 ft.base,1¹/₂ ft.high,W.of cor.,

Land: level desert, drains NE.
Soil: clay loam, 1st.rate.
Timber: none.
Undergrowth: greasewood.

Survey of the Subdivisions of T.6 N., R.8 W.

chains

S.89°59'E., on random line bet.secs.,21 and 28.

40.00

Set temp. 1/4 sec.cor.,

80.02

The cor.,of secs.,21,22,27 and 28.

Thence

N.89°59'W., on true line bet.secs.,21 and 28.

Over desert land,thru scattered undergrowth.

11.30

Road, bears NW. and SE.

36.90

Drain, course SE.

40.01

Set an iron post,3 ft.long,1 in.,diam., 28 ins.,in the ground, for 1/4 sec.cor., marked on brass cap

1/4 S 21

S 28

1929

raise a mound of stone,2 ft.base,1 1/2 ft.high,N.of cor.

41.20

Drain, course NE.

80.02

The cor.,of secs.,20,21,28 and 29.

Land: level desert.

Soil: clay loam, 1st.rate.

Timber: none.

Undergrowth: greasewood, bunch grass.

N.0°02'W. bet.secs.,20 and 21.

Over desert land,thru scattered undergrowth.

27.10

Wire fence, bears NW. and SE.

40.00

Set an iron post,3 ft.long,1 in.,diam., 30 ins.,in the ground, for 1/4 sec.cor., marked on brass cap

1/4

S 20 | S 21

1929

raise a mound of stone,2 ft.base,1 1/2 ft.high,W.of cor.

House, bears N.84° 1/2 W.,20 chs.,dist.,

Well bears N.78° 1/2 W., 23.50 chs.,dist.,

45.37

Wire fence, bears S.74° E., and S.80°W.

46.10

Old road, bears NE. and SW

58.50

Road, bears NW. and SE.

80.00

Set an iron post,3 ft.long,2 ins.,diam.,30 ins.,in the ground, for the cor.,of secs.,16,17,20 and 21, marked on brass cap

T.6 N R 8 W

S 17 | S 16

S 20 | S 21

1929

raise a mound of stone,2 ft.base,1 1/2 ft.high,W.of cor.

Land: level.

Soil: clay, 1st.rate,

Timber: none.

Undergrowth: greasewood, fern, grass, etc.

chains

S 89°59'E on random line bet.secs.,16 and 21.

40.00

Set temp., 1/4 sec.cor.,

80.00

Fall 5 lks., S., of the cor., of secs., 15, 16, 21 and 22.

Thence

S. 89°59'W., on true line bet.secs., 16 and 21.

40.00

Over level desert thru scattered undergrowth.
Set an iron post, 3 ft.long, 1 in., diam., 30 ins., in the ground, for 1/4 sec.cor., marked on brass cap

1/4 S 16

S 21

1929

74.00

raise a mound of stone, 2 ft.base, 1 1/2 ft.high, N.of cor., Road, bears NW. and SE.

80.00

The cor., of secs., 16, 17, 20 and 21.

Land: desert, drains SW.
Soil: sandy and gravelly, 1st.rate.
Timber: scattered mesquite.
Undergrowth: greasewood.

N.0°02'W., bet.secs., 16 and 17.

8.90

Over desert land, thru scattered undergrowth.

40.00

Road, bears NW. and SE.
Set an iron post, 3 ft.long, 1 in., diam., 30 ins., in the ground, for 1/4 sec.cor., marked on brass cap

S 17 | S 16

1929

80.00

Set an iron post, 3 ft.long, 2 ins., diam., 28 ins. in the ground, for the cor., of secs., 8, 9, 16 and 17, marked on brass cap

T 6 N R 8 W

S 8 | S 9

S 17 | S 16

1929

raise a mound of stone, 2 ft.base, 1 1/2 ft.high, W.of cor.,

Land: level desert, drains SW.
Soil: gravelly, 1st.rate.
Timber: scattered paloverde.
Undergrowth: greasewood.

N.89°59'E., on random line bet.secs., 9 and 16.

40.00

Set temp., 1/4 sec.cor.,

80.00

Fall 9 lks., N. of the cor., of secs., 9, 10, 15 and 16.

Thence

N.89°57'W., on true line bet.secs., 9 and 16.

40.00

Over desert land, thru scattered undergrowth.
Set an iron post, 3 ft.long, 1 in., diam., 30 ins., in the ground, for 1/4 sec.cor., marked on brass cap

Survey of the subdivisions of T.6 N., R.8 W.

chains

$\frac{1}{4}$ S 9
S 16

1929

raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

80.00 The cor., of secs., 8, 9, 16 and 17.

Land: level desert, drains SW.
Soil: gravelly, 2nd. rate.
Timber: none.
Undergrowth: greasewood.

N. $0^{\circ}02'W.$, bet. secs., 8 and 9.

25.00

Over desert land, thru scattered undergrowth.

40.00

Asc., SE. slope 60 ft.,

Set an iron post, 3 ft. long, 1 in. diam., 12 ins., in the ground, to bedrock, with marked (X) stone alongside, supported in a mound of stone 4 ft. base, 2 ft. high, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$

S 8 | S 9

1929

45.50

Asc., 25 ft.,

Spur, slopes E. to saddle.

Desc., N. slope 75 ft.,

66.00

Drain, course NW., Over level desert.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins., in the ground, for the cor., of secs., 4, 5, 8 and 9, marked on brass cap

T 6 N R 8 W

S 5 | S 4

S 8 | S 9

1929

raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land: desert and hilly.
Soil: gravelly and rocky, 2nd. and 3rd. rate.
Timber: scattered paloverde.
Undergrowth: greasewood, cacti.

S. $89^{\circ}57'E.$, on random line bet. secs., 4 and 9.

40.00

Set temp., $\frac{1}{4}$ sec. cor.,

80.04

Fall 12 lks., S. of the cor., of secs., 3, 4, 9 and 10.

Thence

S. $89^{\circ}58'W.$, on true line bet. secs., 4 and 9.

37.00

Over desert land, thru scattered undergrowth.

40.02

Drain, course SW.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins., in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$

S 4

S 9

1929

raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Survey of the subdivisions of T.6 N., R.8 W.

BOOK 3878

chains

80.04 The cor., of secs., 4, 5, 8 and 9.

Land: desert, drains W.
Soil: sandy and gravelly, 2nd. rate.
Timber: scattered mesquite.
Undergrowth: greasewood, catclaw, cacti.

N.0°02'W., on random line bet. secs., 4 and 5.

40.00 Set temp., 1/4 sec. cor.,


84.54 Fall 12 lks., E., of the cor., of secs., 4, 5, 32 and 33, on the N., bdy., of the Tp., which is an iron post, 3 ins., diam., 10 ins., above ground, properly marked on brass cap.

Thence

S.0°07'E., on true line bet. secs., 4 and 5.
Over level desert, thru scattered undergrowth.

44.25 Old road (unused) bears NW. and SE.

44.54 Set an iron post, 3 ft. long, 1 in., diam., 30 ins., in the ground, for 1/4 sec. cor., marked on brass cap



raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

84.54 The cor., of secs., 4, 5, 8 and 9.

Land: level desert, drains W.
Soil: gravelly and sandy, 1st. rate.
Timber: none.
Undergrowth: greasewood.


The cor., of secs., 5, 6, 31 and 32, on the S. bdy. of the Tp., is an iron post, 3 ins., diam., 10 ins., above ground, properly marked on brass cap.

Thence

N.0°03'W., bet. secs., 31 and 32.
Over level desert, thru scattered undergrowth.


11.90 Dim road, bears NE. and SW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins., in the ground, for 1/4 sec. cor., marked on brass cap



raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins., diam., 30 ins., in the ground, for the cor., of secs., 29, 30, 31 and 32, marked on brass cap



raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Survey of the Subdivisions of T.6 N., R.8 W.

chains

Land: level desert.
Soil: sandy loam, 1st. rate.
Timber: none.
Undergrowth: greasewood.

East on random line bet. secs., 29 and 32.

40.00 Set temp., 1/4 sec. cor.,
80.04 Fall 7 lks., S., of the cor., of secs., 28, 29, 32 and 33.

Thence
S. 89° 57' W., on true line bet. secs., 29 and 32.
Over level desert, thru scattered undergrowth.
10.90 Old road, bears N. 70° W. and S. 70° E.
40.02 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the
ground, for 1/4 sec. cor., marked on brass cap

1/4 S 29
S 32
1929
raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

40.20 Old road, bears NW. and SE.
80.04 The cor., of secs., 29, 30, 31 and 32.

Land: level desert.
Soil: sandy loam, 1st. rate.
Timber: none.
Undergrowth: greasewood.

West on true line bet. secs., 30 and 31.
Over desert land, thru scattered undergrowth.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the
ground, for 1/4 sec. cor., marked on brass cap

1/4 S 30
S 31
1929
raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

80.29 Intersect the 2nd. guide meridian West 3.37 chs., S.,
of the cor., of secs., 25, 30, 31 and 36, which is a
3 in., iron post, 12 ins., above ground, properly
marked on brass cap.
As this cor., now refers to secs., 25 and 36, R. 9 W.
only alter markings on brass cap to read

R 9 W | R 8 W
S 25 | S 30
S 36 |
T 6 N

At point of intersection set an iron post, 3 ft. long,
2 ins., diam., 28 ins., in the ground, for closing cor.
of secs. 30 and 31, marked on brass cap

T 6 N
R 9 W | R 8 W
S 30 | S 31 C
S 36 |

1929


Survey of the Subdivisions of T.6 N.,R.8 W.

3076


chains raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E., of cor.

Land: level desert.
Soil: loam, sandy, 1st. rate.
Timber: none.
Undergrowth: greasewood.

The original 1/4 sec. cor., for secs., 31 and 36, is an iron post, 1 in., diam., 12 ins., above ground, properly marked on brass cap. As this cor., now refers to sec. 36 only, alter the marks on brass cap to read



At mid point on the W., bdy., of sec. 31, 3.31 chs., S., of the above 1/4 sec. cor., of sec. 36, set an iron post, 3 ft. long, 1 in., diam., 30 ins., in the ground, for 1/4 sec. cor., of sec. 31 only, marked on brass cap




raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

From the cor., of secs., 29, 30, 31 and 32. N. 0° 03' W., bet. secs., 29 and 30. Over desert land, thru scattered undergrowth.

5.50
40.00


Old road, bears E. and W.
Set an iron post, 3 ft. long, 1 in., diam., 30 ins., in the ground, for 1/4 sec. cor., marked on brass cap



raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

66.50
80.00

Old road, bears NW. and SE.
Set an iron post, 3 ft. long, 2 in., diam., 30 ins., in the ground, for the cor., of secs., 19, 20, 29 and 30, marked on brass cap



1929

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.


Land: level desert, drains NE.
Soil: loam, 1st. rate.
Timber: none.
Undergrowth: greasewood.

Survey of the Subdivisions of T.6 N., R.8 W.

chains
 N.89°57'E., on random line bet.secs.,20 and 29.
 40.00 Set temp., $\frac{1}{2}$ sec.cor.,
 80.00 Fall 6 lks.,N., of the cor.,of secs.,20,21,28 and 29.
 Thence
 West on true line bet.secs.,20 and 29.
 Over desert land,thru scattered undergrowth.
 40.00 Set an iron post,3 ft.long,1 in.diam., 30 ins.,in the
 ground, for $\frac{1}{4}$ sec.cor.,, marked on brass cap
 $\frac{1}{4}$ S 20
 S 29
 1929
 raise a mound of stone,2 ft.base,1 $\frac{1}{2}$ ft.high,N.of cor.
 71.20 Drain, course NE.
 80.00 The cor.,of secs.,19,20,29 and 30.
 Land: level desert, drains NE.
 Soil: sandy loam, 1st rate.
 Timber: none.
 Undergrowth: greasewood.


 West on true line bet.secs.,19 and 30.
 Over desert land,thru scattered undergrowth.
 5.95 Wire fence, bears N.55°E. and S.55°W.
 8.10 Road, bears NW. and SE.
 9.30 Wire fence, bears N.60°W. and S.60°E.
 17.90 Drain, course NE.
 40.00 Set an iron post,3 ft.long,.1 in.diam., 30 ins.,in the
 ground, for $\frac{1}{4}$ sec.cor.,, marked on brass cap.
 $\frac{1}{4}$ S 19
 S 30
 1929
 raise a mound of stone,2 ft.base,1 $\frac{1}{2}$ ft.high,N.of cor.

80.12 Intersect the 2nd.guide meridian west, 3.67 chs.,S., of
 the cor.,of secs.,19,24,25 and 30, which is an iron
 post, 3 ins.,diam., 12 ins.,above ground, properly
 marked on brass cap. As this cor., now refers to secs.
 24 and 25, R.9 W., only, alter the markings on brass
 cap to read



1911

At point of intersection set an iron post,3 ft.long,
 2 ins.,diam., 30 ins.,in the ground, for the closing
 cor.,of secs.,19 and 30, marked on brass cap



1929

raise a mound of stone,2 ft.base,1 $\frac{1}{2}$ ft.high,E.of cor.


Survey of the subdivisions of T.6 N., R. 8 W.

3878


chains

Land: level desert, drains NE.
Soil: gravelly and sandy, 1st. rate.
Timber: none.
Undergrowth: greasewood.

The original $\frac{1}{4}$ sec. cor., for secs., 25 and 30 is an iron post, 1 in., diam., 12 ins., above ground, properly marked on brass cap. As this cor., now refers to sec. 25 only, alter the markings on brass cap to read



At midpoint on the W. bdy., of sec., 30, 3.52 chs., S. of the above $\frac{1}{4}$ sec. cor., of sec., 24, set an iron post, $\frac{3}{4}$ ft. long, 1 in., diam., 30 ins., in the ground, for $\frac{1}{4}$ sec. cor., of sec., 30 only, marked on brass cap




raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, E. of cor.,

From the cor. of secs., 19, 20, 29 and 30.
N. $0^{\circ}03'$ W., bet. secs., 19 and 20.

3.50
40.00


Over desert land, thru scattered undergrowth.
Wire fence, bears N. 55° E., and S. 55° W.
Set an iron post, $\frac{3}{4}$ ft. long, 1 in., diam., 30 ins., in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



raise a mound of stone, 2 ft. base; $1\frac{1}{2}$ ft. high, W. of cor.

80.00

Set an iron post, $\frac{3}{4}$ ft. long, 2 ins., diam., 30 ins., in the ground, for the cor., of secs., 17, 18, 19 and 20, marked on brass cap



raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land: level desert, drains NE.
Soil: clay, 1st. and 2nd. rate.
Timber: none.
Undergrowth: greasewood.

Survey of the subdivisions of T.6 N., R.8 W.

chains

East on random line bet. secs., 17 and 20.

40.00
80.00

Set temp., 1/4 sec. cor.,
Fall 2 lks., S., of the cor., of secs., 16, 17, 20 and 21.

Thence

S. 89° 59' W., on true line bet. secs., 17 and 20.
Over desert land, thru scattered undergrowth.

5.00
40.00

Road, to ranch house, bears S.,
Set an iron post, 3 ft. long, 1 in. diam., 27 ins., in the
ground, for 1/4 sec. cor., marked on brass cap

1/4 S 17
S 20

1929

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.,

80.00

The cor., of secs., 17, 18, 19 and 20.

Land: level, drains SE.
Soil: adobe, 2nd. rate.
Timber: none.
Undergrowth: bunch grass.

West on true line bet. secs., 18 and 19.

40.00

Over desert land, thru scattered undergrowth.
Set an iron post, 3 ft. long, 1 in. diam., 30 ins., in the
ground, for 1/4 sec. cor., marked on brass cap

1/4 S 18
S 19

1929

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

56.10
80.00

Old road, bears NW. and SE.
Intersect the 2nd. guide meridian west, 3.77 chs., S.,
of the cor., of secs., 13, 18, 19 and 24, which is an
iron post, 3 ins., diam., 8 ins., above ground, properly
marked on brass cap. As this cor., now refers to secs.
13 and 24, R. 9 W. only, alter the marks on brass cap
to read

R. 9 W | R. 8 W
S 13 | S 18
S 24 |
T 6 N

1929

At point of intersection set an iron post, 3 ft. long,
2 ins., diam., 30 ins., in the ground, for the closing
cor of secs., 18 and 19, marked on brass cap

T 6 N
R 9 W | R 8 W
S 24 | S 18 C
S 19 C


1929

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

Land: level desert, drains NE.
Soil: clay, 1st. rate.
Timber: none.
Undergrowth: greasewood.


chains

The original $\frac{1}{4}$ sec. cor., for secs., 19 and 24, is an iron post, 1 in. diam., 12 ins. above ground, properly marked on brass cap. As this cor., now refers to secs., 24 only., alter the marks on brass cap to read



Wire fencing extends N., and S. 60 E.

At midpoint on the W. bdy., of sec., 19, 3.72 chs., S., of the above $\frac{1}{4}$ sec. cor., of sec., 24, set an iron post, 3 ft. long, 1 in. diam., 30 ins., in the ground, for $\frac{1}{4}$ sec. cor., of sec., 19 only, marked on brass cap




raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, E. of cor.,

From the cor., of secs., 17, 18, 19 and 20.
N. $0^{\circ}03'$ W., bet. secs., 17 and 18.

40.00


Over desert land, thru scattered undergrowth.
Set an iron post, 3 ft. long, 1 in. diam., 30 in., in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.,

65.00
79.00
80.00

Leave flat, asc. SE. slope 35 ft.,
Low spur, slopes E., Desc., 10 ft.,
Set an iron post, 3 ft. long, 2 ins. diam., 38 ins., in the ground, for the cor., of secs., 7, 8, 17 and 18, marked on brass cap



raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.,

Wire fence bears NE. and W.,

Land: flat, broken,
Soil: adobe, and rocky, 2nd. and 3rd. rate.
Timber: scattered paloverde on hill, none on flat.
Undergrowth: bunchgrass, greasewood.

Survey of the subdivisions of T.6 N., R.8 W.

chains

N. 89° 59' E., on random line bet. secs., 8 and 17.

40.00

Set temp., 1/4 sec. cor.,

80.00

Fall 2 lks., N. of the cor., of secs., 8, 9, 16 and 17.

Thence

West on true line bet. secs., 8 and 17.

Over level desert land, thru scattered undergrowth.

17.00


Road, bears NW. and SE.

30.00

Across adobe flat.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 30 ins., in the ground, for 1/4 sec. cor., marked on brass cap



1929

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

70.00

Leave flat, Asc., E. slope 30 ft.,

78.00

Along N. slope.

80.00

The cor., of secs., 7, 8, 17 and 18.

Land: flat, desert and broken.

Soil: gravelly loam, adobe, and rocky, 2nd., and 3rd. rate.

Timber: none.

Undergrowth: greasewood, bunchgrass.

West on true line bet. secs., 7 and 18.

Over broken hills, thru scattered undergrowth.

Asc., along NE. slope 85 ft.

5.00

Gully, course N.

10.00

Top of rocky hill or ridge, bears SE. and NW.,

Along broken S. slope, near top of ridge.

14.00

Head of gully, course S.,

17.60

Shoulder of hill extends S., Desc., W. slope 80 ft.,

23.00


Wire fence, bears SE. and W.

24.00

Draw, course SW., Over desert land.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 30 ins., in the ground, for 1/4 sec. cor., marked on brass cap



1929

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

72.90


Old roadway, bears NW and SE.

75.00

Drain, course SE.

79.88

Intersect the 2nd. guide meridian west, 3.93 chs., S., of the cor., of secs., 7, 12, 13 and 18, which is an iron post, 3 ins., diam., 10 ins., above ground, properly marked on brass cap. As this cor., now refers to secs. 12 and 13, R. 9 W., only, alter marks on brass cap to read



1911

Wire fencing extends E., and W., and S.,


At point of intersection set an iron post, 3 ft. long, 2 ins., diam., 30 ins., in the ground, for the closing

Survey of the Subdivisions of T.6 N., R.8 W.

BOOK 3878

chains

cor of secs., 7 and 18, marked on brass cap



1929

raise a mound of stone, 2 ft. base, 1 1/2 ft high, E. of cor.,

Wire fence bears N., and S.,


Land: broken hills and desert.

Soil: rocky, and adobe clay, 3rd. and 2nd. rate.

Timber: scattered palo verde.


Undergrowth: greasewood.

The original 1/4 sec. cor., for secs., 13 and 18, is an iron post, 1 in., diam., 12 ins., above ground, properly marked on brass cap. As this cor., now refers to sec. 13 only, alter marks on brass cap to read



1911

At midpoint on the W. bdy. of sec., 18, 3.85 chs., S., of the above 1/4 sec. cor. of sec. 13, set an iron post, 3 ft. long, 1 in., diam., 30 ins., in the ground, for 1/4 sec. cor., of sec., 18 only, marked on brass cap



1929

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

From the cor., of secs., 7, 8, 17 and 18.


N. 0° 03' W., bet. secs., 7 and 8.

Over desert land, thru scattered undergrowth.

Desc., N. slope 30 ft.,

10.00 Over adobe flat.


40.00 Set an iron post, 3 ft. long, 1 in., diam., 30 ins., in the ground, for 1/4 sec. cor., marked on brass cap



1929

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins., diam., 30 ins., in the ground, for the cor., of secs., 5, 6, 7, and 8. marked on brass cap



1929

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Survey of the Subdivisions of T.6 N., R.8 W.

chains

Land: flat.
Soil: adobe.
Undergrowth: bunch grass.

East on random line bet. secs., 5 and 8.

40.00 Set temp., 1/4 sec. cor.,
80.00 Fall 5 lks., N., of the cor., of secs., 4, 5, 8 and 9.

Thence
N. 89° 58' W., on true line bet. secs., 5 and 8.
Over desert land, thru scattered undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins., in the
ground, for 1/4 sec. cor., marked on brass cap.

1/4 3 5

3 8

1929

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

53.80 Road, bears N. 20° W. and S. 20° E.,
56.80 Wire fence, bears N. 15° W. and S. 15° E.,
Across open flat.
80.00 The cor., of secs., 5, 6, 7 and 8.

Land: desert.
Soil: gravelly loam and adobe, 2nd. rate.
Timber: none.
Undergrowth: greasewood, bunchgrass.

West on true line bet. secs., 6 and 7.
Over adobe flat,

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins., in the
ground, for 1/4 sec. cor., marked on brass cap

1/4 S 6

S 7

1929

raise a mound of stone, 2 ft. base, 1 1/2 ft. high N. of cor.

79.64 Enter scattered undergrowth,
Intersect the 2nd. guide meridian west, 4.13 chs., S., of
the cor., of secs., 1, 6, 7 and 12, which is an iron post,
3 ins. diam., 12 ins. above ground, properly marked
on brass cap. As this cor., now refers to secs., 1
and 12, R. 9 W., only, alter the marks on brass cap to
read

OR 9 W | R 8 W
S 1 | S 6

S 12 |
T 6 N |

1911

At point of intersection set an iron post, 3 ft. long,
2 ins. diam., 26 ins., in the ground, for the closing
cor. of secs., 6 and 7, marked on brass cap

T 6 N
B 9 W | R 8 W
S 12 | S 6 C

S 7 C


1929

chains


raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

Land: desert.
Soil: clay, 2nd. rate.
Timber: none.
Undergrowth: bunchgrass and greasewood.

The original 1/4 sec. cor., for secs., 7 and 12, is an iron post, 1 in., diam., 12 ins., above ground, properly marked on brass cap. As this cor., now refers to sec. 12 only, alter the marks on brass cap to read




At midpoint on the W. bdy., of sec., 7, 4.03 chs., S., of the above 1/4 sec. cor., of sec., 12, set an iron post, 3 ft. long, 1 in., diam., 30 ins., in the ground, for 1/4 sec. cor., of sec., 7 only, marked on brass cap




raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

The original 1/4 sec. cor., of secs., 1 and 6, is an iron post, 1 in., diam., 12 ins., above ground, properly marked on brass cap. As this cor., now refers to sec. 1 only, alter the marks on brass cap to read



At 40.00 chs., in latitude from the closing cor., of secs. 6 and 7, 4.13 chs., S., of the above 1/4 sec. cor., of sec. 1, set an iron post, 3 ft. long, 1 in., diam., 28 ins., in the ground, for 1/4 sec. cor., of sec. 6, only with brass cap marked




raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

From the cor., of secs., 5, 6, 7 and 8, N. 0° 10' W., on true line bet. secs., 5 and 6, objective cor. visible.

Over adobe flat.

40.00

Set an iron post, 3 ft. long, 1 in., diam., 30 ins., in the ground, for 1/4 sec. cor., marked on brass cap



Survey of the Subdivisions of T.6 N., R.8 W.

chains

raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

83.60

Road, bears E. and W.

84.37

The cor., of secs., 5, 6, 31 and 32, on the N., bdy., of the Tp., which is an iron post, 3 ins., diam., 10 ins., above ground, properly marked on brass cap. From this cor. a well and windmill bears N. 65° E., 3.00 chs. dist. A house bears N. 89½° E., 2.50 chs. dist.

Land: flat.

Soil: adobe, 2nd. and 3rd. rate.

Timber: none.

Undergrowth: bunchgrass.

Boundaries of T.6 N., R.8 W.

Latitudes, departures and closing errors.

Line designated.	True bearing	Dist.	Latitude.		Departure.	
			N.	S.	E.	W.
South boundary	West	480.23				480.23
West boundary	North	483.25	483.25			
North boundary	East	479.03			479.03	
East boundary	South	484.80		484.80		
Convergency					0.49	
Totals			483.25	484.80	479.52	480.23
				483.25		479.52
Error in latitude				1.55		
Error in departure						0.71

GENERAL DESCRIPTION

The township consists principally of desert lands, supporting a varied growth of cacti and greasewood. Some scattered growth of paloverde and mesquite is found throughout the hills. The eastern portion is broken with volcanic ridges and hills varying in elevation to six or seven hundred feet.

An abandoned ranch is situated in section 20; Meyers Well, a former ranch, headquarters, is located in section 34, and affords the only water within the township. The country is dry and arid, and there is insufficient verdure to permit profitable ranching. Some mineral prospecting has been carried on throughout the hills, but nothing found to warrant further development.

40
BOOK 3878

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Dupree R. Averill, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer, for Group 156, Arizona bearing date of the 23rd day of October, 1928, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of

the East Boundary and Subdivision Lines of

Township 6 North, Range 8 West

altered all those corner monuments on the

East Boundary of Township 6 North, Range 9 West

and established all those quarter-section corners on the

West Boundary of

Township 6 North, Range 8 West

of the Gila and Salt

River Base and Meridian, in the State of Arizona, which are represented in

and by diagram on page 1 hereof

the foregoing field notes ^{as having been executed by me, and under my direction; and that all the corners of} said survey have been established and perpetuated ^{or altered} in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer, for Group 156, Arizona

and in the specific manner described in the field notes, and that the foregoing are the original field notes of

such survey, corner alteration and establishment.

Place: Phoenix Arizona.

Date: June 13, 1929.

Dupree R. Averill
U. S. Surveyor.

APPROVAL.

OFFICE OF U. S. SUPERVISOR OF SURVEYS,

Denver, Colo., January 13, 1930

The foregoing field notes of the survey of the East Boundary and
Subdivision Lines of Township 6 North, Range 8 West

of the alteration of corner monuments on the lines of

East Boundary of Township 6 North, Range 9 West

and of the establishment of quarter-section corners on the the State of Arizona

West Boundary of Township 6 North, Range 8 West

of the Gila and Salt River Base and Meridian, in the State of Arizona

executed by Dupree R. Averill, U.S. Surveyor

under his special instructions dated October 23, 1928 for Group 156, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys, and corner alteration and establishment they describe, are hereby approved.

Wm. H. Johnson
U. S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above described surveys in

, has been correctly copied from the original notes on file in this office.

U. S. Supervisor of Surveys.