

FIELD NOTES

OF RETRACEMENT OF

Part of the Lines of Mineral Surveys Nos. 2388 and 2719

OF THE RESURVEY OF

2nd Standard Parallel North thru Ranges 3 and 4 West

Part (West $\frac{1}{2}$) of South Boundary of T. 8 N., R. 4 W.

Part (North 2 M.) of East Boundary of T. 8 N., R. 5 W.

and

Part of the Subdivision Lines of T. 8 N., R. 4 W.

AND OF THE SURVEY OF

East Boundary

Part (East $\frac{1}{2}$) of South Boundary

and Part (Completion) of the Subdivision Lines of

Township 8 North, Range 4 West

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

*Benjamin J. Kinsey**U.S. Surveyor*

In the capacity of U. S. Surveyor, under Special Instructions dated October 3, 1928, issued by the District Cadastral Engineer to govern surveys included in Group No. 155 Arizona, which were approved by the Commissioner of the General Land Office, November 16, 1928, and Assignment Instructions dated January 5, 1929

Retracement
Resurvey and Survey commenced January 15, 1929.

Retracement
Resurvey and Survey completed March 27, 1929.

INDEX DIAGRAM.

Township _____, Range _____

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36


Book "A"

Group 155 Arizona

Township 8 North, Range 4 West

INDEX DIAGRAM

BOOK 3892

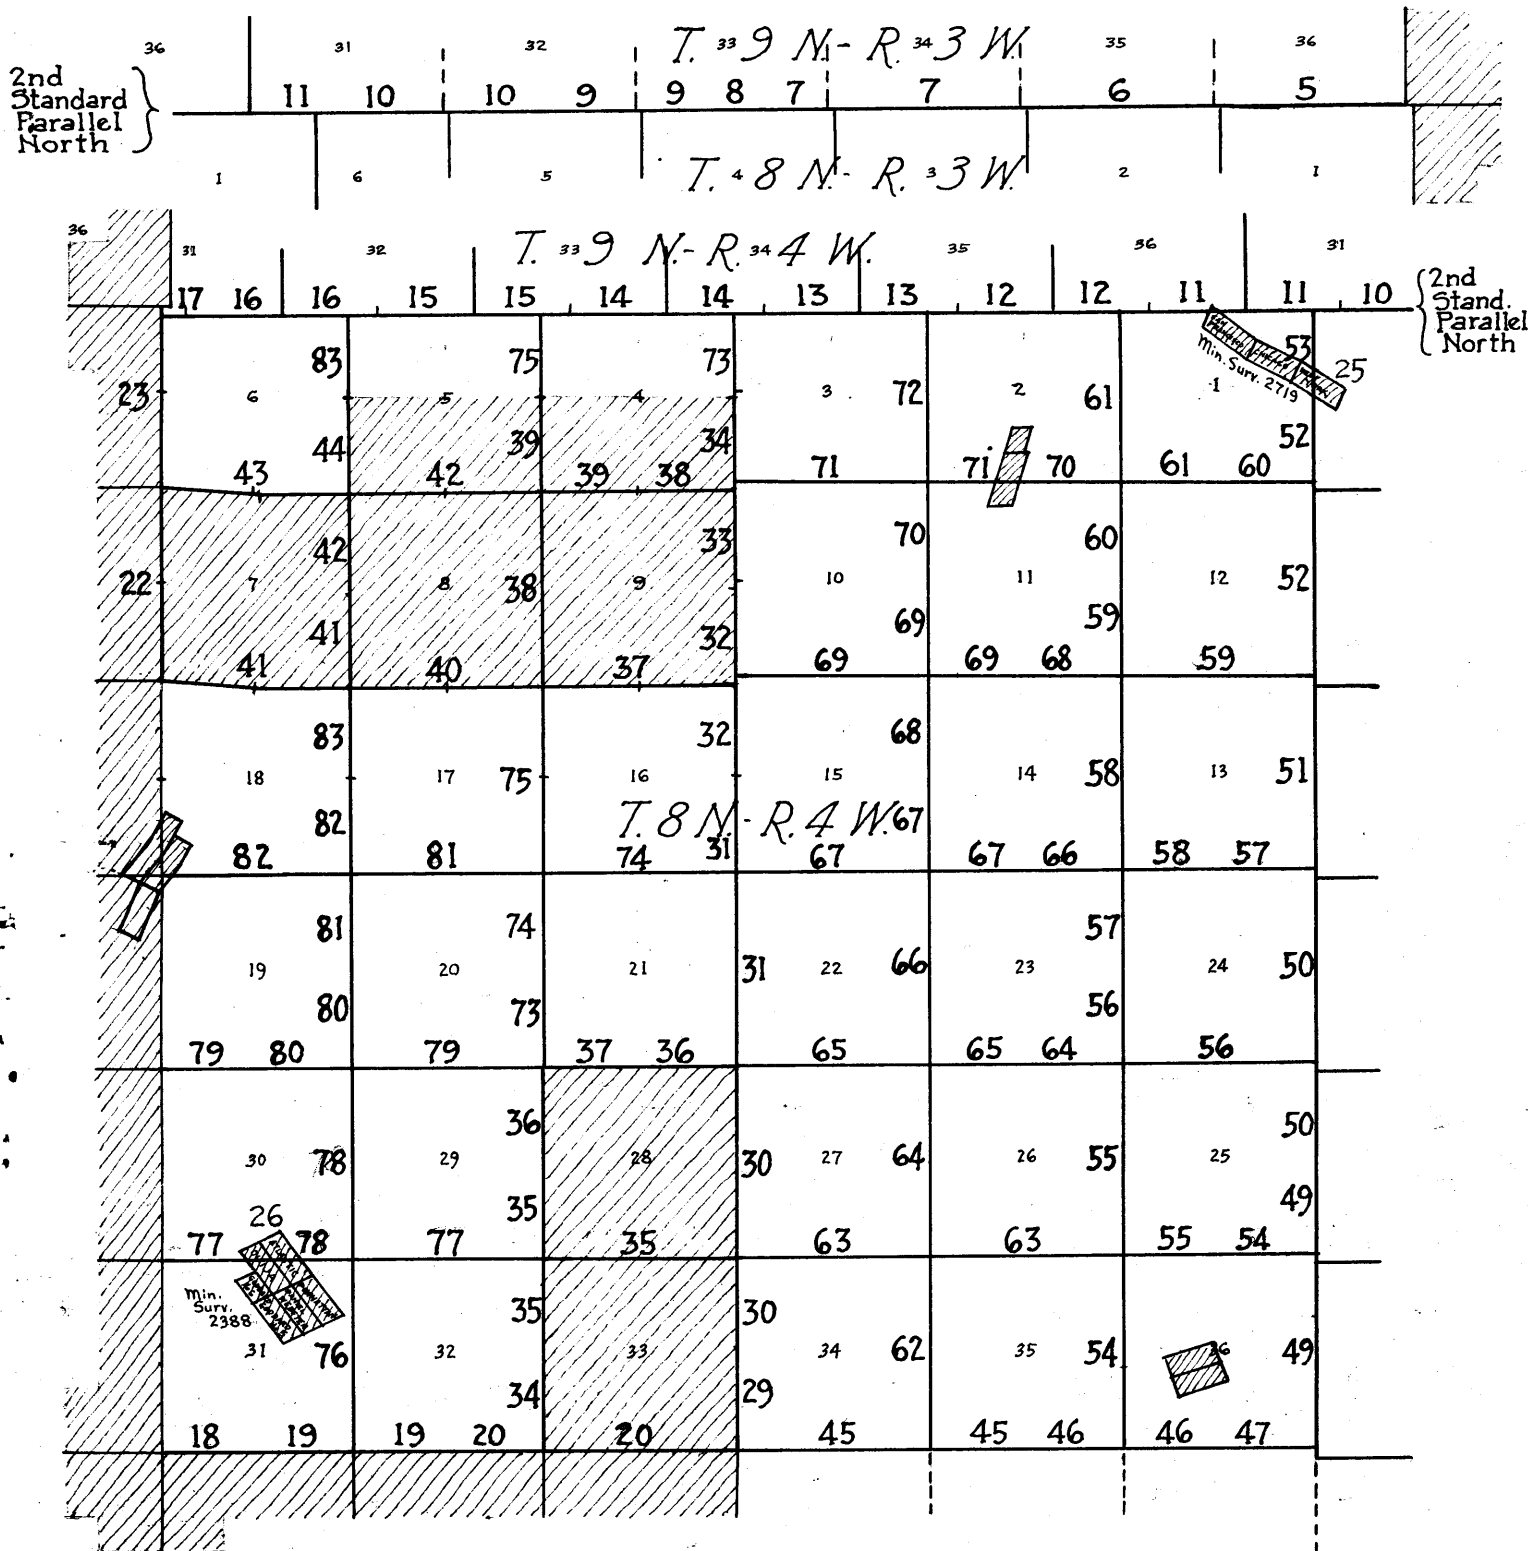


————— Surveyed under this group.

————— Resurveyed under this group.

————— Retraced under this group.

————— Accepted surveys.

- - - - - Unsurveyed.

 Areas surveyed as per accepted plats on file.

The resurveys and surveys herein described were executed on dates shown on diagram on page 2 hereof, by Benjamin J. Kinsey, U.S. Surveyor, using a Buff "Rocky Mountain Favorite" solar transit No. 18,000, with U-shaped standards, $4\frac{1}{2}$ inch horizontal circle, 4 inch vertical circle and improved Smith solar attachment.

The instrument was examined, tested on the true meridian at the Federal Building at Phoenix, Arizona, found correct and approved by the District Cadastral Engineer for Arizona and California, January 3, 1929, conditional upon satisfactory field tests. All azimuth determinations are accomplished with the solar attachment except the special observations upon Polaris and the sun for meridian upon which to test the solar apparatus as stated in the field notes.

All measurements are made with a Lallie steel tape, 5 chains in length, compared with a Lufkin standard steel tape and found correct. The measurements are made on the slope, the vertical angle determined and the slope measurements properly reduced to true horizontal distances for entry in the field notes.

PRELIMINARY FIELD TEST

of

Buff transit No. 18,000.

by

Benjamin J. Kinsey, U.S. Surveyor.

January, 9, 1929; at station in camp, in sec. 34, T.8 N., R.4 W., Gila and Salt River Base and Meridian, Arizona, latitude $34^{\circ} 00' N$ and, longitude $112^{\circ} 39\frac{1}{2}' W$, 112° 40' W., examine the adjustments of the transit and find no errors.

At 0h. 20m., a.m., l.m.t., observe Polaris at western elongation, making four observations, two each with the telescope in direct and reversed positions, and marking the line thus determined by setting a tack in top of a stake driven firmly in the ground about 5 chs. North.

Azimuth of Polaris at western elongation : $1^{\circ} 17' 33''$

Lay off the azimuth of Polaris $1^{\circ} 17\frac{1}{2}'$ to the east and mark the meridian thus determined by a tack set in a stake about 5 chs. North.

At 9h. 00m., a.m., app. t., with latitude arc set at $34^{\circ} 00' N$ and the decl. arc set at $22^{\circ} 04' S$, determine a meridian with the solar which is found to agree with the true meridian.

At 12h. 00m., app. noon, with latitude arc unchanged, observe the sun on the meridian; the resultant reading of the decl. arc is $22^{\circ} 04' S$, which agrees with the computed declination of the sun.

At 3h. 00m., p.m., ^{app. t.} with lat. arc unchanged, set off $22^{\circ} 02' S$ on decl. arc and determine a meridian with the solar which is found to agree with the true meridian.

As all of the observations taken during the usual hours of solar work agree within 1' of the true meridian conclude that the adjustments of the instrument are satisfactory.

OBSERVATIONS

for

Time and Latitude.

January 9, 1929:

in approximate latitude 34°00'N, and longitude 112°40'

W. make a meridian observation of the sun for time and latitude, observing simultaneously the altitude of the sun's lower limb and the transit of the sun's west limb, reversing the telescope and observing simultaneously the altitude of the sun's upper limb and the transit of the sun's east limb:

Mean observed altitude: 33° 53' 05"

Reduced latitude: 34° 03' 00"

Mean watch time of obsn: 12h. 37m. 50s.

Watch fast of local mean time: 30m. 42s.

January 10, 1929:

at same station as described above, make an altitude observation on Polaris at upper culmination for latitude making four observations, two each with the telescope in direct and reversed positions:

Watch fast of 105th meridian standard time by comparison 0m. 09s.

Mean watch time of obsn.: 6h. 46m. 00s.

Mean observed vertical angle: 35° 04' 08"

Reduced latitude: 33° 59' 50"

January 22, 1929:

at same station as described above, make an altitude observation on Polaris at upper culmination for latitude making four observations, two each with the telescope in direct and reversed positions:

Watch agrees exactly with 105th meridian standard time by comparison with Western Union Tel. clock at Wickenburg, Arizona.

Mean watch time of obsn.: 5h. 28m. 00s.

Mean observed vertical angle: 35° 04' 08"

Reduced latitude: 33° 59' 50"

Resurvey of

Second Standard Parallel North thru Ranges 3 and 4 West.

Chains

The 2nd. Std. Par. N. was surveyed thru Ranges 3 and 4 W., by J.B. McLaughlin, U. S. D. S., in 1883, and no retracement or resurvey of the Parallel in either of said ranges is of record.

There being no accepted surveyed areas on either side of the Parallel in Ranges 3 and 4 W., the line is subject to rectification in alinement and measurement.

The following notes describe an independent resurvey of the Parallel due West thru Ranges 3 and 4 W., from the std. cor. of Ts. 9 N., Rs. 2 and 3 W., which was reestablished in 1919. In this resurvey, std. $\frac{1}{4}$ sec. and sec. cors. are reestablished alternately, at 40 ch. intervals and at point where the resurveyed Parallel intersects the East bdy. of T. 8 N., R. 5 W., a closing cor. of Ts. 8 and 9 N., R. 4 W. is established. Destroy all original std. cors. found after obtaining bearing and distance from each to its corresponding reestablished position.

Thru Range 3 West.

The std. cor. of Ts. 9 N., Rs. 2 and 3 W., reestablished by J.P. Davis, U.S.S. in 1919, is an iron post 3 ins. in diam., projecting 14 ins. above ground, firmly set and properly mkd. on brass cap and witnessed by a md. of stone N. of cor. No bearing trees.

Thence,
West, on true line, on S. bdy. of sec. 36,
Over mountainous land thru scattering timber and thick undergrowth.

- 7.20 Desc. 157 ft. over broken SW slope.
- Dry wash, 20 lks. wide, course NW.
- 32.25 Asc. 325 ft. over broken NE slope.
- Rocky, narrow spur, brs. NW.
- 40.00 Desc. 192 ft. over steep SW slope to
- Set an iron post 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, deposit an iron bolt at base of post, raise a md. of stone about post for the reestablished. std. $\frac{1}{4}$ sec. cor. of sec. 36, with brass cap mkd.

S C
 $\frac{1}{4}$ S 36

1929

No bearing trees available.
No trace of original std. $\frac{1}{4}$ sec. cor. of sec. 36, T. 9 N. R. 3 W. can be found in this vicinity.

- 64.10 Desc. 571 ft. over SW slope.
- Hawk Springs Wash, rocky dry bottom, 15 lks. wide, 2 ft. deep, course NW. Asc. 187 ft. over NE slope.
- 75.10 Rocky, narrow spur, brs. N.
- Desc. 140 ft. over W. slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, deposit a small iron bolt at base of post, raise a md. of stone about post for the reestablished std. cor. secs. 35 and 36 with brass cap mkd.

S C
T9N | R3W
S35 | S36

1929

No bearing trees available.
No trace of original std. cor. secs. 35 and 36, T. 9 N., R. 3 W., can be found in this vicinity.

Resurvey of

Second Standard Parallel North, thru Ranges 3 and 4 West.

Chains	(Thru Range 3 continued.)
	Land, mountainous. Soil, rocky 4th. rate. Timber, mesquite and palo verde, some ironwood. Undergrowth, catclaw, greasewood and cacti.

	West, on true line, on S. Bdy. of sec. 35. Over mountainous land, thru thinly scattered timber and thick undergrowth.
1.80	Desc. 22 ft. over steep W. slope. Rocky wash, 30 lks. wide, 1 ft. deep, course N. (branch of Hawk Springs Wash.)
21.90	Asc. 571 ft. over NE slope. Top of round butte, about 2 chs. in diam., on spur from SW.
27.90	Desc. 161 ft. over SW slope. Head of wash, course SW.
30.90	Asc. gradually along S. slope. Rocky, narrow spur, brs. S.
40.00	Desc. 168 ft. over SW slope to Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post for the reestablished std. 1/4 sec. cor. of sec. 35, with brass cap mkd.
	S C 1/4 S 35
	1929
	No bearing trees available. No trace of original std. 1/4 sec. cor. sec. 35, T.9 N., R.3 W., found in this vicinity.
49.00	Desc. 220 ft. over SW slope. Rocky wash, 20 lks. wide, course NW.
50.20	Asc. 40 ft. over NE slope to spur. Intersect the NE side line (2-4) of the "Amazon" patented lode mining claim, Mineral Survey No. 1385, at a point 3.54 chs. S. 44°43'E., from cor. No. 3 thereof. Thence across patented mineral land.
52.20	Spur, brs. N. Desc. 46 ft. over W. slope.
54.00	Wash, 10 lks. wide, course N. Asc. 25 ft. over E. slope.
54.80	Short spur, brs. N. Desc. 25 ft. over E. slope.
55.70	Wash, 20 lks. wide, course N. Asc. 156 ft. over NE slope.
63.90	Spur, brs. N. Thence along level N. slope.
68.80	Desc. 167 ft. over rough NW slope to wash.
78.25	Intersect the SW side line (5-6) of the "Bellairs" patented lode mining claim, Mineral Survey No. 1553, at 7.50 chs. N. 26° W., from cor. No. 6 thereof. Leave patented mineral land.
77.90	Rocky wash, 30 lks. wide, course N. (drains into Amazon Gulch). Asc. 71 ft. over E. slope to cor.
79.20	Old road, brs. NE-SW.
80.00	Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for the reestablished std. cor. secs. 34 and 35, with brass cap mkd.

S C
T9N R3W
S34 | S35

Resurvey of

8892

Second Standard Parallel North, thru Ranges 3 and 4 West.

Chains	(Thru Range 3 West.)
	<p>No bearing trees available; raise a md. of stone 4 ft. base and 2 ft. high W. of cor. No trace of the original std. cor. secs. 34 and 35 found in this vicinity.</p> <p>Land, mountainous. Soil, rocky 4th. rate. Timber, scrub mesquite, ironwood and palo verde. Undergrowth, cacti, greasewood and catclaw.</p>
	<p>-----</p> <p>West, on true line, on S. bdy. sec. 34. Over mountainous land, thru scattering timber and thick undergrowth.</p>
13.40	<p>Asc. 321 ft. over E. slope. Spur, brs. N., about 1 ch. wide.</p>
40.00	<p>Desc. 388 ft. over SW slope. Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for the reestablished std. $\frac{1}{4}$ sec. cor. sec. 34, with brass cap mkd.</p>
	<p style="text-align: center;">S C $\frac{1}{4}$ S 34</p>
	<p style="text-align: center;">1929</p> <p>No bearing trees available; raise a md. of stone 4 ft. base, 1$\frac{1}{2}$ ft. high N. of cor. No trace of the original std. $\frac{1}{4}$ sec. cor. sec. 34, T.9 N., R. 3 W. found in this vicinity.</p>
42.60	<p>Desc. 96 ft. over W. slope. O'Brien Gulch, rocky bottom, 30 lks. wide, course N.</p>
59.00	<p>Asc. 218 ft. over E. slope. Ridge, 1 ch. wide, brs. S. and NW.</p>
63.25	<p>Desc. 125 ft. over SW slope. Head of wash, course NW.</p>
70.50	<p>Asc. 86 ft. over NE slope. Spur, brs. NW.</p>
80.00	<p>Desc. 227 ft. over SW slope. Set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone around post, for the reestablished std. cor. secs. 33 and 34, with brass cap mkd.</p>
	<p style="text-align: center;">S C T9N R3W <u>S33 S34</u></p>
	<p style="text-align: center;">1929</p> <p>No bearing trees available; No trace of the original std. cor. secs. 33 and 34, T.9 N., R. 3 W., found in this vicinity.</p>
	<p>Land, mountainous. Soil, rocky 4th. rate. Timber, mesquite, ironwood and palo verde. Undergrowth, greasewood, catclaw and cacti.</p>
	<p>-----</p> <p>West, on true line, on S. bdy. sec. 33. Over mountainous land, thru scattering timber and thick undergrowth.</p>
1.60	<p>Desc. 34 ft. over SW slope. Wash, 15 lks. wide, course NW. Desc. 95 ft. along S. side of same wash.</p>

Resurvey of

Second Standard Parallel, North, thru Ranges 3 and 4 W.

Chains	(Thru Range 3 West.)
4.50	Telephone line, brs. NE-SW.
9.35	Same wash, turns to S.
10.90	Asc. gradual SE slope. Short spur, brs. S. Desc. gradual SW slope.
11.90	Wash, 10 lks. wide, course S.
26.70	Asc. 39 ft. along S. slope. Spur, brs. SW. Desc. 159 ft. over SW slope, to cor.
39.25	Used road, brs. NW and SE.
40.00	Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the reestablished std. $\frac{1}{4}$ sec. cor. sec. 33, with brass cap mkd.
	S C $\frac{1}{4}$ S 33
	1929
	No bearing trees available; raise a md. of stone 4 ft. base, 2 ft. high N. of cor.
	(No trace of the original std. $\frac{1}{4}$ sec. cor. sec. 33, T. 9 N., R. 3 W., found in this vicinity.)
	From std. $\frac{1}{4}$ sec. cor. sec. 33, to house break S. 7° E., about 4 chs. dist.
	" " " S. 4° E., about 5 chs. dist.
	" " " S. 25° W., " 7 " "
	(Old Constellation Postoffice here.)
41.38	Desc. 47 ft. over SW slope, to Slim Jim Creek. Intersect the SE side line (1-2) of the "Olympia Extension" patented lode mining claim, M.S. 1973, at 58 lks. N. 31° 50' E., of Cor. No. 1, thereof. Across patented mineral land.
42.66	Intersect the SW end line (1-4) of the "Olympia Extension" patented lode mining claim, at 1.09 chs. N. 58° 10' W. of Cor. No. 1, thereof. Leave patented mineral land.
43.60	Continue on descent over SW slope. Enter Slim Jim Wash, intermittent stream of water in bottom of sandy wash about 50 lks. wide, course NW.
44.30	Leave wash; asc. 146 ft. over NE slope.
54.13	Spur, brs. NE, asc. gradually along S. slope. Intersect the NE side line (1-2) of "Rosalind" patented lode mining claim, Min. Sur. No. 1623 at 83 lks. N. 59° 20' W. of cor. No. 1 thereof. Thence across patented mineral land.
55.01	From which, U.S.L.M. No. 1623, which is a pine post, 6 ins. sq. and 4 ft. above ground and md. of stone, mkd. USLM on N., and 1623 on S. faces, brs. N. 13° 30' E., 1.35 chs. dist. As the post is badly rotted, reconstruct this location monument as follows: Remove the pine post and in same place set an iron post 3 ft. long, 3 ins. in diam., in center of large md. of stone, for U.S.L.M. No. 1623, with brass cap mkd.
	USLM 1623
	1929
	From which,
	East end of Black Rock Mill, brs. N. 24 $\frac{1}{2}$ ° W., (V.A. - 7 $\frac{1}{2}$ °)
	large boulder on peak " S. 29° 17' E. (V.A. + 7°)
	Monte Cristo Hoist " S. 19° 18' E. (V.A. - 0° 30')
	Morgan Butte " S. 53° E., (V.A. + 7°)
	Mound of stone on high peak " N. 27° 47' E. (V.A. + 8 $\frac{1}{2}$ °)

Resurvey of


BOOK 3892

Second Standard Parallel North, thru Ranges 3 & 4 West.

Chains Thru Range 3 West

55.00 Spur, brs. S. Desc. 276 ft. over SW slope.
 69.95 Wash, 30 lks. wide, course NW. Asc. 66 ft. over NE slope.
 71.72 Intersect the SW side line (3-4) of "Rosalind" patented lode mining claim No. 1623, Mineral Survey No. 1623, at 15.95 chs. N. 59° 20' W., from cor. No. 4 thereof. Leave patented mineral land.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post, for the reestablished std. cor. secs. 32 & 33, with brass cap mkd.



1929

No bearing trees available.
 No trace of the original std. cor. secs. 32 & 33, T.9 N., R.3 W., found in this vicinity.

Land, mountainous.
 Soil, rocky 4th. rate.
 Timber, scrub mesquite, ironwood and palo verde.
 Undergrowth, catclaw, cacti and greasewood.


West, on true line, on S. Bdy. sec. 32.
 Over mountainous land, thru scattering timber & undergrowth.

Asc. gradual NE slope.

1.10 Spur, brs. N. Desc. 163 ft. over W. slope.
 8.20 Wash, 20 lks. wide, course N. Asc. 44 ft. over E. slope.
 12.00 Spur, brs. N. Desc. 18 ft. over W. slope.
 14.00 Wash, near head, course N. Asc. 30 ft. over E. slope.
 16.22 Intersect the NE side line, (1-6) of the "Texas Addition" patented lode mining claim, M.S. No. 3675, at 4.97 chs. S. 38° 20' 20" E. of Chr. No. 6 thereof. Across patented mineral land.

17.50 Spur, brs. N. Desc. gradual W. slope.
 19.30 Wash, near head, course N. Asc. 91 ft. over NE slope.
 30.85 Spur, brs. N. Desc. 30 ft. along W. slope.
 37.10 Wash, 20 lks. wide, course NE.
 Asc. 32 ft. over NE slope to

40.00 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, deposit a stone marked with a cross (+) at base of post, raise a mound of stone about post, for the Std. 1/4 sec. cor. of sec. 32, with brass cap marked.



1929

No bearing trees available.
 From this cor., the original Std. 1/4 sec. cor. of sec. 32, brs. S. 82° 39' E., 16.45 chs., which is a stone 6 x 3 x 10 ins. above ground and mound of stone, mkd. 1/4 on N. face, no bearing trees.
 Destroy all trace of the original Std. 1/4 sec. cor. of sec. 32.

Asc. 139 ft. over NE slope.
 43.99 Intersect W. end line (2-3) of "Texas No. 4" pat'd. lode mining claim, M.S. 3675, at 4.77 chs. N. 43° 03' W., of cor. No. 2 thereof. Leave patented mineral land.

Resurvey of

Second Standard Parallel North, thru Ranges 3 and 4 West.

Chains

Thru Range 3 West,

46.73
56.25
63.75
80.00

High, narrow spur, brs. NW. Desc. 193 ft. over S. slope.
Head of wash, course SW. Asc. 23 ft. over SE slope.
Spur, brs. S. Desc. 393 ft. over rolling SW slope to
Set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in
the ground to bedrock; deposit a stone marked with a
cross (+) at base of post, raise a mound of stone
about post; for the Std. cor. of secs. 31 and 32, with
brass cap marked

SC
T9N | R3W
S31 | S32

1929

No bearing trees available.

No trace of the original std. cor. of secs. 31 and 32,
T.9 N., R.3 W., found in this vicinity.
Land, mountainous.
Soil, rocky 4th. rate.
Timber, paloverde, mesquite and ironwood.
Undergrowth; cacti, catclaw and desert brush.

West, on true line, on S. Bdy. of sec. 31.
Over mountainous land, thru scattering timber & under-
Desc. 40 ft. over W. slope.
Wash, 20 lks. wide; course NW. Asc. 20 ft. over NE slope.
Spur, brs. NW. Desc. 126 ft. over W. slope.
Wash, 40 lks. wide, course N. Asc. 118 ft. over NE slope.
Spur, brs. NE. Desc. 27 ft. over NW slope.
Wash, 10 lks. wide, course NW. Asc. 102 ft. over NE slope.
Short spur, brs. NW. Desc. 23 ft. over W. slope.
Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the
ground for the std. reestablished ~~std. cor. sec. 31,~~
with brass cap mkd.

5.60
10.50
15.80
25.30
36.70
38.60
40.00

S C
1/4 S 31

1929

(No bearing trees available; raise a md. of stone 4 ft.
base, 1 1/2 ft. high N. of cor. 3 ft. distant.)

(From this cor. the original standard 1/4 sec. cor. of
sec. 31, T.9N., R.3W., which is a granite stone
16 x 12 x 8 ins. above ground, loosely set in md. of
stone, mkd. 1/4 on N. face., brs. S. 87°28'E., 18.17 chs.
dist., mkd.)

Destroy all trace of the original std. 1/4 sec. cor.
sec. 31, T.9 N., R.3 W.

Resurvey of 1st Standard Parallel North, thru Ranges 3 and 4 West.

BOOK 3892

Second Standard Parallel North, thru Ranges 3 and 4 West.

Chains

Thru Range 3 West
(Continued.)

- 41.25 Desc. 26 ft. over SW slope.
- Wash, 10 lks. wide, course NW.
- 61.65 Asc. 277 ft. over NE slope.
- Ridge, brs. NW.
- 80.00 Desc. 299 ft. over SW slope.
- Set an iron post 3 ft. long, 3 ins. in diam., 16 ins. in the ground to bedrock, deposit a stone mkd. with a cross (x) at base of post, raise a md. of stone about post for the established std. cor. of Ts. 9 N., Rs. 3 & 4 W., with brass cap mkd.



1929


From this cor. the original std. cor. of Ts. 9 N., Rs. 3 and 4 W., brs. S. 84° 55' E., 18.97 chs. dist., which is a granite stone 18 x 10 x 6 ins. loosely set in a md. of stone, mkd. six grooves on three faces. Destroy all trace of the original std. cor. of Ts. 9 N., Rs. 3 and 4 W.

Land, mountainous.
Soil, rocky 4th. rate.
Timber, scrub mesquite, ironwood and palo verde.
Undergrowth, greasewood, cacti and catclaw.

Thru Range 4 West.

- West, on true line, on S. Bdy. sec. 36, T.9 N., R.4 W.
- Over mountainous land, thru scattering timber and undergrowth.
- 3.70 Desc. 75 ft. over W. slope, to wash.
- 4.15 Power line, brs. NW-SE.
- 8.80 From which, a small house brs. N. 41° W.
- 8.95 Enter sandy wash, course NW.
- Used road, brs. NW-SE.
- x10.60 Intersect the NE side line (2-3) of the "San Francisco" patented lode mining claim, Min. Sur. No. 2719, at 2.25 chs. S. 52° 35' E., from cor. No. 2 thereof.
- Across patented mineral land.
- 10.70 Leave wash, asc. 209 ft. over NE slope to spur.
- 14.07 Intersect the NW end line (1-2) of the "San Francisco" patented lode mining claim at 1.51 chs. S. 26° 45' W., of cor. No. 2 thereof.
- Leave patented mineral land.
- 26.60 Spur, brs. NE; from which, same small house brs. N. 44° E.
- 40.00 Desc. 40 ft. over W. slope.
- Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post for the established 1/4 sec. cor. sec. 36, with brass cap mkd.

x
11.60



1929

No bearing trees available.
From this cor., the original std. 1/4 sec. cor. sec. 36, T.9 N., R.3 W., brs. S. 83° 00' E., 19.00 chs. dist., which is a granite stone 22 x 8 x 5 ins., loosely set in md. of stone, mkd. 1/4 on N. face, from which a mesquite tree, 12 ins. in diam., brs. S. 89° W., 27 lks. dist. mkd. SC 1/4 SBT.
Destroy all trace of the original std. 1/4 sec. cor. sec. 36, T.9 N., R.3

Resurvey of

Second Standard Parallel North, thru Ranges 3 and 4 West.

Chains	Thru Range 4 West (Continued.)
	Destroy all trace of original std. cor. of sec. 36, T.9 N., R.4 W.
43.90	Desc. 50 ft. over W. slope. Wash, 20 lks. wide, course N.
46.70	Asc. 20 ft. over NE slope. Spur, brs. N.
48.25	Desc. 40 ft. over W. slope. Wash, 20 lks. wide, course N.
53.50	Asc. 95 ft. over NE slope to spur. Old badly washed road, brs. NW-SE.
56.15	Spur, brs. N. Desc. 221 ft. over NW slope.
72.45	Wash, 30 lks. wide, course N. Asc. 24 ft. over rocky NE slope.
80.00	Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for the reestablished std. cor. secs. 35 and 36, with brass cap mkd.
	S C T9N R4W S35 S36
	1929
	No bearing trees available; raise a md. of stone 4 ft. base, 2 ft. high N. of cor.
	From this cor. the original std. cor. secs. 35 and 36, T.9 N., R.4 W., brs. S. 61° 07' W., 6.08 chs. dist., which is a granite stone 18 x 12 x 6 ins. loosely set in a md. of stone, mkd. with SC on N. and 1 and 5 notches on E. and W. faces.
	Destroy all trace of the original std. cor. of secs. 35 and 36, T.9 N., R.4 W.
	Land, mountainous. Soil, rocky 4th. rate. Timber, mesquite, palo verde and ironwood. Undergrowth, cacti, catclaw and greasewood.

	West; on true line, on S. Bdy. of sec. 35.
	Over mountainous land, thru scattering timber and thick undergrowth.
21.20	Desc. 209 ft. over NW slope to Hassayampa River bottom. Road, brs. NE-SW.
	Thence across bottom land, thru dense timber and undergrowth.
31.38	South edge of Hassayampa River, brs. NE-W.
34.60	Leave river edge, asc. 21 ft. over NE slope. Lv. dense timber.
38.85	Top of ascent; thence over rolling land, brs. NW-SE. an old rock fireplace, brs. South 30 lks. dist.
40.00	Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post, for the reestablished std. cor. sec. 35, with brass cap mkd.
	S C 1/4 S 35
	1929
	No bearing trees available.

Second Standard Parallel North, thru Ranges 3 and 4 West.

Chains

(Thru Range 4 West, continued.)

From this cor., the original std. $\frac{1}{4}$ sec. cor. of sec. 35, T.9 N., R.4 W., brs. S. $81^{\circ}40'E.$, 18.99 chs. dist., which is a granite stone 23 x 8 x 5 ins. above ground, loosely set in a mound of stone, mkd. $\frac{1}{4}$ on one face, from which, a mesquite, 14 ins. in diam., brs. West, 28 lks. dist., marked SC $\frac{1}{4}$ SBT.

Destroy all trace of the original std. $\frac{1}{4}$ sec. cor. of sec. 35, T.9 N., R.4 W.

45.00 Desc. gradual W. slope.

47.90 Wire fence, brs. N-S. (N. about 3 chs. thence, SW.)

50.00 From which, Alfred Champies house brs. S. about 7 chs. distant.

53.70 Same fence, brs. NE-SW.

55.86 Enter Hassayampa River, stream of water, 70 lks. wide, 4 ins. deep, course S.

67.50 Leave river bottom; asc. 62 ft. over E. slope.

73.50 Across rolling mesa land, brs. N-S.

75.00 Desc. 67 ft. over SW slope.

78.90 Shallow wash, course S. Asc. gradual E. slope.

80.00 Set an iron post 5 ft. long, 2 ins. in diam., 22 ins. in the ground to bedrock, deposit a stone marked with a cross (+) at base of post, raise a mound of stone about post, for the reestablished Std. cor. of secs. 34 and 35, with brass cap marked

S C	
T9N	R4W
S34	S35

1929

No bearing trees available.

From this cor., the original Std. cor. of secs. 34 and 35, T.9 N., R.4 W., brs. S. $80^{\circ}50'E.$, 18.96 chs. which is a granite stone 8 x 12 x 30 ins. above ground and mound of stone, marked with 2 and 4 grooves on East and West faces.

Destroy all trace of the original Std. cor. of secs. 34 and 35, T.9 N., R.4 W.)

Land, mountainous and rolling.

Soil, rocky 4th. rate.

Timber, paloverde, mesquite and cottonwood.

Undergrowth, cacti, catclaw and greasewood.

West, on true line, on S. Bdy. of sec. 34.

Over rolling land, thru scattering timber & undergrowth. Across level land.

4.50 Desc. 69 ft. over west slope.

6.20 Enter Fools Canyon; across wash, course S.

6.90 Used road, brs. N. and S.

11.30 Leave wash, asc. 65 ft. over E. slope.

12.40 Same road, brs. NE and SW.

18.00 Same road, brs. NW and SE.

20.00 Wire fence, brs. NW and SE.

40.00 Set an iron post 5 ft. long, 1 in in diam., 18 ins. in the ground to bedrock, raise a mound of stone about post, for the reestablished Std. $\frac{1}{4}$ sec. cor. of sec. 34, with brass cap marked

S C	
$\frac{1}{4}$	S 34

1929

from which, a paloverde, 7 ins. in diam., brs. N. $58^{\circ}W.$, 39 lks. dist., marked SC $\frac{1}{4}$ S34 BT

a paloverde, 6 ins. in diam., brs. N. $53^{\circ}E.$, 57 lks. dist., marked SC $\frac{1}{4}$ S34 BT

Resurvey of the Second Standard Parallel North, thru Ranges 3&4 W.

(Thru Range 4 West,
continued.)

From this cor. the original std. $\frac{1}{4}$ sec. cor. of sec. 34, T.9 N., R.4 W., brs. S.81°22'E., 18.35 chs., which is a granite stone, 12 x 12 x 5 ins. loosely set in a mound of stone, marked $\frac{1}{4}$ on one face.

Destroy all trace of this original std. $\frac{1}{4}$ sec. cor.
Continue over rolling land.

41.00 Wash, 20 lks. wide, course S.20°W.

54.51 Shallow wash, 10 lks. wide, course S.

57.23 Shallow wash, 20 lks. wide, course S.

63.50 Spur, brs. S.

70.50 Desc. 40 ft. over W. slope.

71.80 Enter wash, course SE. across sandy bottom.

80.00 True point for the reestablished std. cor. of secs. 33 and 34, falls in wash, where it is impracticable to monument the cor., therefore at a point 2.20 chs. West, and at W. edge of same wash, establish witness cor. as hereinafter described.

Land, rolling. Soil, rocky 4th. rate. Timber, paloverde and mesquite. Undergrowth, cacti, catclaw and greasewood.

From true point for the reestablished std. cor. of secs. 33 and 34, West, on true line on S. Bdy. of sec. 33.

Over rolling land, thru scattering timber & undergrowth. Across sandy wash bottom, course SE.

2.20 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for the witness cor. to reestablished std. cor. of secs. 33 and 34, with brasscap marked

S C	
T9N	R4W
S33	S34
WC	

1929

from which,

a cross (+) chiseled in face of outcropping boulder brs. N.70°W., 7 lks. dist., Also chisel BOS33

No bearing tree available. Raise a mound of stone 4 ft. base, 2 ft. high N. of cor.

From this cor., the original std. cor. of secs. 33 & 34, T.9 N., R.4 W., brs. S.81°E., 18.65 chs., which is a granite stone, 8 x 10 x 12 ins. above ground and mound of stone, marked with three grooves on each of E. and W. faces.

Destroy all trace of this original std. cor.

Asc. 102 ft. over E. slope.

8.50 Spur, brs. SE. Desc. 66 ft. over W. slope.

15.00 Wash, near head, course S. Asc. 51 ft. over E. slope.

19.70 Spur, brs. S. Desc. 79 ft. over W. slope.

23.00 Enter wash, course S.

31.00 Leave wash, course SE.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (+) at base of post, raise a mound of stone about post, for the reestablished std. $\frac{1}{4}$ sec. cor. sec. 33, with brass cap marked

S C	
<u>$\frac{1}{4}$ S 33</u>	

1929

No bearing trees available.

From this cor., the original std. $\frac{1}{4}$ sec. cor. of sec. 33, T.9 N. R.4 W., brs. S.78°31'E., 19.35 chs. dist.

Destroy all trace of this original std. corner.


Resurvey of

BOOK 3892

Second Standard Parallel North, thru Ranges 3 & 4 West.

Chains (Thru Range 4 W., continued.)

49.00 Enter dry wash, across sandy bottom of same.
 52.50 Main channel, 150 lks. wide, course S.
 55.70 Leave wash; asc. 57 ft. over west bank.
 60.25 Top of bank, brs. N. and S.
 Road, brs. N. and S.
 62.00 Desc. gradual W. slope.
 67.54 Wash, 10 lks. wide, course S. Asc. 75 ft. over E. slope.
 75.00 Spur, brs. S. Across level top to
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in
 the ground to bedrock, deposit a stone marked with a
 cross (+) at base of post, raise a mound of stone
 about post, for the reestablished std. cor. of secs.
 32 and 33, with brass cap marked




1929

No bearing trees available.
 From this cor. the original std. cor. of secs. 32 and
 33, T.9 N., R.4 W., brs. S. 77° 29' E., 19.68 chs. dist.
 which is a malapai stone 18 x 12 x 6 ins. above ground,
 firmly set in a mound of stone, marked with 4 and 2
 grooves on E. and W. faces respectively, SC on N. face.
 Destroy all trace of this original std. cor.

Land, rolling.
 Soil, rocky 4th. rate.
 Timber, paloverde, mesquite and ironwood.
 Undergrowth, cacti, catclaw and greasewood.

West, on true line, on S. Bdy. of sec. 32.
 Over rolling land, thru scattering timber and undergrowth.
 Desc. 63 ft. over west slope.
 5.60 Wash, 10 lks. wide, course S.
 Asc. 19 ft. over E. slope.
 11.00 Spur, brs. SW. Desc. 77 ft. over NW slope.
 16.60 Wash, 20 lks. wide, course SW.
 Asc. 15 ft. over SE slope.
 21.20 Spur, brs. S. Desc. 16 ft. over NW slope.
 22.50 Enter wash, across sandy bottom.
 26.20 Main channel, 200 lks. wide, course SE.
 28.00 Leave wash, asc. gradual SE slope to
 39.40 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for the witness cor. to reestablished std.
 1/4 sec. cor. of secs 32, with brass cap marked



1929

No bearing trees available; raise a mound of stone
 3 ft. base, 2 ft. high N. of cor.
 40.00 True point for reestablished std. 1/4 sec. cor. falls in
 wash, where it is impracticable to set monument, there-
 fore establish witness cor. at 60 lks. East, as here-
 inbefore described.
 No trace of the original std. 1/4 sec. cor. of sec. 32
 found in this vicinity.
 50.40 Road, brs. NE-SW.

Resurvey of

Second Standard Parallel North, thru Ranges 3 & 4 West.

Chains

55.50

Wash, 15 lks. wide, course SE.

Asc. 81 ft. over SE slope.

63.20

Spur, brs. SE. Desc. 68 ft. over SW slope.

76.90

Wash, 40 lks. wide, course S.

80.00

Set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, raise a mound of stone about post, for the reestablished std. cor. of secs. 31 and 32 with brass cap marked

S C

T9N	R4W
S31	S32

1929

from which,
 a paloverde, 6 ins. in diam., brs. N.50°E., 96 lks. dist., marked SC T9N R4W S32 BT
 a paloverde, 8 ins. in diam., brs. N.30°W., 104 lks. dist., marked SC T9N R4W S31 BT

From this cor., the original std. cor. of secs. 31 & 32, T.9 N., R.4 W., brs. S.69°26'E., 19.19 chs. dist. which is a granite stone 18 x 12 x 6 ins. set in a mound of stone, marked with 5 and 1 grooves on E. and W. faces respectively.

Destroy all trace of this original std. cor.

Land, rolling.

Soil, rocky 4th. rate.

Timber, paloverde, mesquite and ironwood.

Undergrowth, cacti, catclaw and greasewood.

West, on true line, on S. Bdy. of sec. 31.

Over rolling land, thru scattering timber & undergrowth.

Asc. gradual SE slope.

2.00

Ridge, brs. N-S. Desc. 53 ft. over W. slope.

8.00

Center of wash, 150 lks. wide, course SE.

Asc. 29 ft. over NE slope.

11.80

Spur, brs. S.

13.50

Wash, 1 ch. wide, course S.

17.70

Spur, brs. S. Desc. 29 ft. over W. slope.

23.10

Wash, 30 lks. wide, course SE.

Asc. gradual SE slope.

26.50

Spur, brs. SW. Desc. 23 ft. over W. slope.

28.60

Center of wash, 50 lks. wide, course S.

Asc. gradual SE slope.

33.00

Spur, brs. S.20W. Desc. gradual SW slope.

36.60

Wash, 30 lks. wide, course S.

40.00

Set an iron post 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, deposit a stone marked with a cross (+) at base of post, raise a mound of stone about post, for the reestablished std. $\frac{1}{4}$ sec. cor. of sec. 31, with brass cap marked

S C

 $\frac{1}{4}$ S 31

1929

No bearing trees available.

From this cor., the original std. $\frac{1}{4}$ sec. cor. of sec. 31, T.9 N., R.4 W., brs. S.67°04'E., 19.76 chs. dist. which is a malapai stone 20 x 10 x 6 ins. above ground, loosely set in a mound of stone, mkd. $\frac{1}{4}$ on N. face.


Resurvey of

Second Standard Parallel North, thru Ranges 3 & 4 West.

Chains

43.50
44.50
49.00
50.94
52.26

(Destroy all trace of this std. corner.)
 Spur, brs. S.
 Center of wash, 1 ch. wide, course SE.
 Spur, brs. S.
 Wash, 20 lks. wide, course SE.
 Intersect the east bdy. of T.8 N., R.5 W., at a point
 94 lks. South of W.C. to C.C. to T.9 N., R.4 W. and
 T.8 N., R.5 W., and 2.44 chs. South of true point
 for said closing corner, on 2nd. Std. Par. N., in Range
 5 West. Witness cor. and alterations hereinafter des-
 cribed in notes of "Resurvey of part of the East Bdy.
 of T.8 N., R.5 W."
 At point of intersection, set an iron post 3 ft. long,
 3 ins. in diam., 26 ins. in the ground for the clos-
 ing cor. of Ts. 8 and 9 N., R.4 W., with brass cap
 marked



1929

Land, rolling.
 Soil, rocky 4th. rate.
 Timber, paloverde, ironwood and mesquite.
 Undergrowth, cacti, catclaw and greasewood.

Resurvey of

Part (West half) of the South Bdy. of T.8 N., R.4 W.

Chains

The west half of the South Bdy. of T.8 N., R.4 W., was surveyed by S.M. Foreman, U.S.D.S., in 1872. No retracement or resurvey of any part of this line is of record. The following notes describe a dependant resurvey of the west half of S. bdy. of T.8 N., R.4 W.

Retracement for Resurvey.


From original cor. of Ts. 7 and 8 N., Rs. 4 and 5 W., hereinafter described. East, on random line, on S.Bdy. of T.8 N., R.4 W. searching diligently at record intervals for the original cor. monuments. Fail to find any trace of original cors. and at (Record dist.) Diligent search in this vicinity fails to reveal any trace of original cor. of secs. 3, 4, 33 and 34. Set temp. cor. of said secs. The East half of this Tp. bdy. being unsurveyed, the only method of resurvey of the west half is to reproduce the record course and dist. of East, 240.00 chs., reestablishing the 1/4 sec. and sec. cors. alternately at 40 chs. intervals, counting from the cor. of Ts. 7 and 8 N., Rs. 4 and 5 W.

240.00

Resurvey.

The original cor. of Ts. 7 and 8 N., Rs. 4 and 5 W., reconstructed by J.F.Hesse, U.S.D.S., in 1909, is a granite stone 4 x 8 x 10 ins. above ground, firmly set in a mound of stone, marked with six grooves on N., S., E. and W. edges, T8NR5W on W. and T8NR4W on E. faces, from which, a paloverde, 5 ins. in diam., brs. S.12 1/2°W., 126 lks. dist., marked T7N R5W S1 BT a paloverde, 5 ins. in diam., brs. N.6 1/4°W., 101 lks. dist., marked T8N R5W S36 BT

Reconstruct this cor. monument as follows: alongside the original cor. stone, set an iron post 3 ft. long, 3 ins. in diam., 26 ins. in the ground, for cor. of Ts. 7 and 8 N., Rs. 4 and 5 W., with brass cap marked



T7N
1929 from which, a paloverde, 4 ins. in diam., brs. N.65°E., 57 lks. dist., marked BT only, a paloverde, 5 ins. in diam., brs. S.76°E., 52 lks. dist., marked T7N R4W S6 BT Thence, East, on true line, bet. secs. 6 and 31. Over rolling land, thru scattering timber & undergrowth. Asc. 9 ft. over W. slope. Spur, brs. S. Desc. 34 ft. over E. slope.


1.00

Resurvey of

Part (West half) of the South Bdy. of T.8 N., R.4 W. BOOK 3802

Chains


3.55 Wash, 10 lks. wide, course SW. Asc. gradual E. slope.
 6.10 Spur. brs. S, Desc. 67 ft. over rolling S. slope.
 12.00 Road, brs. NW-SE, (from Wickenburg-Remuda Ranch).
 19.00 Center of wash, 1 ch. wide, course SW.
 Asc. 34 ft. over SW slope to
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for the reestablished $\frac{1}{4}$ sec. cor. secs. 6
 and 31, with brass cap mkd.



1929

No bearing trees available; raise a md. of stone 4 ft.
 base, 1 $\frac{1}{2}$ ft. high N. of cor.
 41.15 Telephone line, brs. NE-SW. Wash, 10 lks. wide, course SW.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in
 the ground for the reestablished cor. secs. 5, 6, 31 and
 32, with brass cap mkd.


T8N R4W



T7N
1929

No bearing trees available; raise a md. of stone 4 ft.
 base, 1 $\frac{1}{2}$ ft. high W. of cor.
 Land, rolling.
 Soil, rocky 4th. rate.
 Timber, palo verde, mesquite and ironwood.
 Undergrowth, greasewood, catelaw and cacti.

East. on true line, bet. secs. 5 and 32.
 3.80 Over rolling land, thru scattering timber and undergrowth.
 Center of wash, 1 ch. wide, course SW.
 Asc. 63 ft. over E. slope.
 17.50 Spur. brs. SW.
 26.50 Old road, brs. NW-SE.
 31.50 Graded road from Wickenburg-Monte Cristo mine, brs. NE-SW.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in
 the ground to bedrock, raise a md. of stone about
 post, for the reestablished $\frac{1}{4}$ sec. cor. secs. 5 and
 32, with brass cap mkd.



1929

from which,

a palo verde, 8 ins. in diam., brs. S. 24° W., 41 lks.
 dist., mkd. $\frac{1}{4}$ S5 BT
 a palo verde, 8 ins. in diam., brs. N. 26 $\frac{1}{2}$ ° W., 38 lks.
 dist., mkd. $\frac{1}{4}$ S32 BT
 Mon. No. 13 on Yavapai-Maricopa County Boundary line,
 brs. N. 5° 55' W., 11.63 chs. distant, which is a tri-
 angular shaped concrete pier, 2 ft. above ground,
 mkd. "Yavapai County 1924" on NE face, "Maricopa County"
 on S. face and "Mon. No. 13, N. 73° 20' W., 14094.5 ft.
 to Mon. No. 12" S. 73° 20' E., 14272.0 ft. to Mon. No. 14"
 on West face.

48.15 Center of wash, 50 lks. wide, course SW.
 55.00 Ravine, 30 lks. wide, course SW.
 65.80 Old road, brs. N-S.
 70.00 Wash. 10 lks. wide, course SW.

Resurvey of

Part (West half) of the South bdy. of T.8 N., R.4 W.

Chains													
80.00	Set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post, for the reestablished cor. secs. 4, 5, 32 and 33 with brass cap mkd.												
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>T8N</td><td>R4W</td></tr> <tr><td>S32</td><td>S33</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;"></td></tr> <tr><td>S5</td><td>S4</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;">T7N</td></tr> <tr><td colspan="2" style="text-align: center;">1929</td></tr> </table>	T8N	R4W	S32	S33			S5	S4	T7N		1929	
T8N	R4W												
S32	S33												
S5	S4												
T7N													
1929													
	No bearing trees available. Land. rolling, Soil, rocky 4th. rate. Timber, palo verde, mesquite and ironwood. Undergrowth, greasewood, catalaw and cacti.												

	East, on true line, bet. secs. 4 and 33.												
	Over rolling land, thru scattering timber and undergrowth.												
8.30	Old road, brs. NE-SW.												
12.00	Same road, brs. NW-SE.												
15.30	" " " NE-SW.												
21.80	" " " NE-SW (at bend.)												
24.00	Wash, 40 lks. wide, course SW.												
26.10	Wash. 40 lks. wide, course SW.												
40.00	Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the reestablished $\frac{1}{2}$ sec. cor. secs. 33 and 4, with brass cap mkd.												
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>S33</td><td></td></tr> <tr><td>S4</td><td></td></tr> <tr><td colspan="2" style="border-top: 1px solid black;">1929</td></tr> </table>	S33		S4		1929							
S33													
S4													
1929													
	No bearing trees available; raise a md. of stone 4 ft. base, 2 ft. high N. of cor.												
47.00	Asc. 52 ft. over NW slope of knoll.												
	Spur, brs. N., top of black knoll brs. S. about 2 chs.												
	Desc. 29 ft. over E. slope.												
54.15	Small ravine, course S.												
77.40	Wash. 20 lks. wide, course SW.												
80.00	Set an iron post 3 ft. long, 2 ins. indiam. 26 ins. in the ground for the reestablished cor. sec. 3, 4, 33 and 34, with brass cap mkd.												
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>T8N</td><td>R4W</td></tr> <tr><td>S33</td><td>S34</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;"></td></tr> <tr><td>S4</td><td>S3</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;">T7N</td></tr> <tr><td colspan="2" style="text-align: center;">1929</td></tr> </table>	T8N	R4W	S33	S34			S4	S3	T7N		1929	
T8N	R4W												
S33	S34												
S4	S3												
T7N													
1929													
	No bearing trees available; raise a md. of stone 4 ft. base, 2 ft. high W. of cor.												
	Land. rolling. Soil, rocky 4th. rate. Timber, palo verde, mesquite and ironwood. Undergrowth, greasewood, catalaw and cacti.												

Resurvey of

BOOK 3892

Part of the East Boundary of Township 8 North, Range 5 West.

Chains

The north half mile bet. secs. 7 and 12, on E. bdy. of T. 8 N., R. 5 W., was surveyed in 1882 by W.A. Hancock, U.S.D.S. in connection with his survey of part of the subdivision lines of T. 8 N., R. 4 W. and said deputy surveyor also at same time established the cor. of secs. 7, 12, 13 and 18 on the Tp. bdy. The original cor. of secs. 1, 6, 7 and 12 was established by Hancock by survey of sub. line bet. secs. 6 and 7, T. 8 N., R. 4 W., due west with convergency allowance to locate said sec. cor. theoretically North from Tp. cor. and the cor. of secs. 7, 12, 13 and 18 was established by him in the same manner. The north half of line bet. secs. 7 and 12, was surveyed by Hancock due South from the cor. secs. 1, 6, 7 and 12, the $\frac{1}{4}$ sec. cor. of secs. 7 and 12 established at 40 chs. from said sec. cor., and Tp. bdy. discontinued at the $\frac{1}{4}$ sec. cor.

The remainder of the East Bdy. of T. 8 N., R. 5 W., was surveyed, and the N $\frac{1}{2}$ half mile bet. secs. 7 and 12 re-surveyed, by J.F. Hesse, U.S.D.S., in 1909.

No other retracement or resurvey of any part of this Tp. bdy. is of record.

The following notes describe a resurvey of the north two miles of the east bdy. of T. 8 N., R. 5 W.

Retracement for resurvey.

- 40.13 From original cor. secs. 7, 12, 13 and 18, hereinafter described.
N.0°27'W., on random line, bet. secs. 7 and 12 (S $\frac{1}{4}$).
Intersect the $\frac{1}{4}$ sec. cor. of secs. 7 and 12; hereinafter described.
True course and dist. of S $\frac{1}{4}$ of line bet. secs. 7 and 12, are therefore N.0°27'W., 40.13 chs.
Thence,
- 40.09 N.0°04'E., on random line, bet. secs. 7 and 12, (N $\frac{1}{4}$).
Fall 8 lks. W. of the cor. secs. 1, 6, 7 and 12, hereinafter described.
True course and dist. of N $\frac{1}{4}$ of line, bet. secs. 7 and 12, are therefore N.0°11'E., 40.09 chs.

- 40.24 North, on random line, on E. Bdy. of sec. 1, (S $\frac{1}{4}$).
Intersect original $\frac{1}{4}$ sec. cor. secs. 1 and 6, hereinafter described.
True course and dist. of S $\frac{1}{4}$ of E. Bdy. of sec. 1 are therefore North, 40.24 chs.
Thence,
- 31.74 North, on random line on N $\frac{1}{4}$ of E. Bdy. sec. 1.
Intersect the witness cor. to closing cor. of Ts. 8 N., Rs. 4 and 5 W., hereinafter described. This witness cor. is of record as being set 1.50 chs. S. from the true point for closing cor. of Ts. 8 N., Rs. 4 and 5 W.
- 33.24 Intersect the true point for C.C. of Ts. 8 N., Rs. 4 and 5 W. on the 2nd. St. Par. N. 2.11 chs. S. 89°53'W., from the std. cor. of Ts. 9 N., Rs. 4 and 5 W., hereinafter described.
True course and dist. of N $\frac{1}{4}$ of E. Bdy. of sec. 1, are therefore North, 33.24 chs.

Resurvey.


The original cor. of secs. 7, 12, 13 and 18 is a stone 14 x 10 x 6 ins. above ground, firmly set, mkd. with 2 and 4 grooves on N. and S. faces, from which a md. of stone 3 ft. base, 2 ft. high brs. W. 3 ft. dist.

Resurvey of

Part of the East Boundary of Township 8 North, Range 5 West.

Chains

Reconstruct this cor. monument as follows:
Alongside cor. stone set an iron post 3 ft. long, 2 ins. in diam., 10 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post for the cor. secs. 7, 12, 13 and 18, with brass cap mkd.




1929

Thence, N.0°27'W., on true line, bet. secs. 7 and 12, (S $\frac{1}{2}$). Over mountainous land, thru scattering timber and undergrowth.

- 19.00 Desc. 206 ft. over NW slope.
- Rim of box cany., brs. E-W; desc. 217 ft. over precipitous slope.
- 23.50 Foot of steep descent; S. edge of Hassayampa River bottom, across sandy, rocky ground.
- 24.00 Hassayampa river, stream of water 60 lks. wide, 7 ins. deep, course West. Road, brs. E. and W. in bottom, frpm Camerons Ranch to Wickenburg, Arizona.
- This point is near the west end of the Box Canyon.
- 25.50 Leave bottom; asc. 89 ft. over S. slope to spur.
- 35.00 Spur, brs. E.; Desc. 19 ft. over NE slope to
- 39.20 Wash, 10 lks. wide, course E.
- Asc. gradual SE slope to

40.13 Intersect the $\frac{1}{4}$ sec. cor. secs. 7 and 12, reconstructed by J.F.Hesse, U.S.D.S., in 1909, which is a stone 8 x 6 x 6 ins. above ground, firmly set, mkd. $\frac{1}{4}$ on W. face, witnessed by a md. of stone 4 ft. base, 2 ft. high W. 3 ft. dist.

Reconstruct this cor. monument again as follows:
Alongside the old cor. stone set an iron post 3 ft. long 1 in. in diam., 26 ins. in the ground, for the $\frac{1}{4}$ sec. cor. secs. 7 and 12, with brass cap mkd.




1929

No bearing trees available.
Thence, N.0°11'E., on true line, bet. secs. 7 and 12, (N. $\frac{1}{2}$). Over rolling land, thru scattering timber and undergrowth. Asc. 106 ft. over SE slope to ridge.

- 4.20 Road, brs. E-W. (used during flood periods of Hassayampa River, from Camerons ranch-Wickenburg.)
- 11.20 Ridge, brs. NE-SW. Desc. 115 ft. over NW slope.
- 40.09 Intersect the cor. secs. 1, 6, 7 and 12, reconstructed by J.F.Hess, U.S.D.S., in 1909, which is a stone 12 x 6 x 6 ins. above ground, firmly set, mkd. 1 and 5 grooves on N. face, witnessed by a md. of stone 4 x 2 ft. W. of cor.

Reconstruct this cor. monument again as follows:
Alongside old cor. stone set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for the cor. secs. 1, 6, 7 and 12, with brass cap mkd.



1929

No bearing trees available.


Resurvey of Part of the East Boundary of Township 8 North, Range 5 West. BOOK 3892

Chains

Land, rolling and mountainous.
Soil, rocky 4th. rate.
Timber, palo verde; mesquite and ironwood, with cottonwood and willows along River bottom.
Undergrowth, cacti, catclaw and greasewood.

2.70
10.90
38.20
40.24

North, on true line, on E. Bdy. sec. 1, (S $\frac{1}{2}$).
Over rolling land, thru scattering timber and undergrowth.
Desc. gradual SW slope.
Wash, 10 lks. wide, course SW.
Wash, 10 lks. wide, course SW. Asc. 47 ft. over SW slope.
Spur, brs. SW. Desc. 12 ft. over NW slope to
intersect the original $\frac{1}{4}$ sec. cor. secs. 1 and 6 which is a granite stone 10 x 12 x 6 ins. above ground, firmly set in md. stone, mkd. $\frac{1}{4}$ on W. face,
Reconstruct this cor. monument as follows:
Alongside old cor. stone set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. secs. 1 and 6, with brass cap mkd.



1929

No bearing trees available.

5.70
12.40
30.80

Thence,
North, on true line, bet. secs. 1 and 6 (N $\frac{1}{2}$).
Desc. gradual NW slope.
Wash, 20 lks. wide, course SW.
Same wash, course SE.
Point of intersection with 2nd. St. Par. N., independently resurveyed due west thru ranges 3 and 4 West.
Closing cor. of Ts. 8 and 9 N., R. 4 W., established at this point as hereinbefore described.

31.74

Intersect the original witness cor. to closing cor. of Ts. 8 N., Rs. 4 and 5 W., which is a malapai stone 12 x 12 x 6 ins. above ground, firmly set mkd. WCCC on S. face, and 6 grooves on each of E. and W. faces. No bearing trees, witnessed by a md. of stone 4 ft. base, 2 ft. high S. of cor. Destroy marking on E. face.

33.24

Intersect the 2nd. St. Par. N., at original true point for closing cor. of Ts. 8 N., Rs. 4 and 5 W., in wash 15 lks. wide, course SW. and at 2.11 chs. S. 89° 53' W., from std. cor. of Ts. 9 N., Rs. 4 and 5 W. which is a malapai stone 12 x 12 x 6 ins. above ground firmly set, mkd. SC and 6 grooves on N. face and 6 grooves on each of E. and W. faces, and witnessed by two bearing trees:
a palo verde 8 ins. in diam., brs. N. 20° E., 240 lks. dist., mkd. SC T9N R4W S31 BT
a palo verde, 8 ins. in diam., brs. N. 26 $\frac{1}{2}$ ° W., 178 lks. dist., mkd. SC T9N R5W S36 BT

By the resurvey of the 2nd. St. Par. N., thru Ranges 3 and 4 West, to intersection with E. Bdy. of T. 8 N., R. 5 W., hereinbefore described, this std. Tp. cor. becomes a std. cor. of T. 9 N., R. 5 W. only (SE cor.) therefore alter the cor. monument for such single Tp. reference by obliterating the grooves on E. face of

Resurvey of Part of the East Boundary of Township 8 North, Range 5 West.

Chains

stone and the markings on NE original bearing tree. The point of intersection of the east bay of T.8 N., R.5 W., with the 2nd. St. Par. N., now becomes point for closing cor. of T.9 N., R.4 W., and T.8 N., R.5 W.

Land, rolling.

Soil, rocky 4th. rate.

Timber, palo verde, ironwood and mesquite.

Undergrowth, greasewood, catclaw and cacti.

Retracement of

Patented Mining Claims in Township 8 North, Range 4 West.

Chains

The following notes describe a retracement of all those parts or portions of the boundaries of patented mining claims intersected by the exterior and subdivisional lines of T.8 N., R.4 W., required where such claims fail to close properly when using the mineral record bearings and distances in connection with said intersections.

Mineral Survey No. 2719
"San Francisco, Chicago and New York Claims."
in sec. 1.

- Cor. No. 1 of the San Francisco lode claim is a granite stone 22 x 14 x 6 ins. set about 10 ins. in the ground, mkd. SF-1-2719 on NE face. Md. stone 3 ft. base, 1 ft. high W. of cor.
- Thence,
N.26°45'E., on random line, on NW end line of San Francisco lode claim.
- 9.11 Intersect Cor. No.2 of the claim which is a granite stone 8 x 16 x 12 ins. above ground, firmly set in md. of stone, mkd. SF 2-2719 on SE face.
True course and dist. of NE end line of claim are therefore N.26°45'E., 9.11 chs.
- Thence,
S.52°35'E., on random line, on NE side line of claim.
- 20.46 Intersect Cor. No. of San Francisco lode claim, identical with Cor. No.1 of the Chicago lode claim, which is a granite stone 12 x 12 x 8 ins. above ground, firmly set, mkd. SF 3-2719 on NW face and C-1 on S. face witnessed by a mesquite tree 24 ins. in diam., which brs. N.46½°W., 82 lks. dist., mkd. SF 3-2719 BT on SE face.
True course and dist. of NE side line of San Francisco lode claim are therefore S.52°35'E., 20.46 chs.
- Thence,
S.63°15'E., on random line, on NE side line of the Chicago lode claim.
- 20.32 Intersect remains of a md. of stone which accept as the cor. No. 3 of Chicago claim, identical with Cor. No. 1 of the New York lode claim.
True course and dist. of NE side line of Chicago lode claim are therefore S.63°15'E., 20.32 chs.
- Thence,
S.57°50'E., on a random line, on NE side line of the New York lode claim.
- 18.66 Intersect Cor. No.2 of New York lode claim, which is a granite stone 10 x 12 x 8 ins. above ground, loosely set in md. of stone, mkd. C-2-2719 on W. face.
True course and dist. of NE side line of New York lode mining claim are therefore S.57°50'E., 18.66 chs.
- Thence,
S.26°45'W., on random line on the SE end line of the New York claim.
- 9.06 Intersect Cor. No. 3 of the New York claim, which is a granite stone 6 x 8 x 10 ins. above ground, firmly set, mkd. NY-3-2719 on NW face.
True course and dist. of SE end line of the New York claim are therefore S.26°45'W., 9.06 chs.
- Thence,
N.57°50'W., on random line, on SW side line of claim.
- 18.65 Intersect Cor. No. 4 of the New York Claim, identical with Cor. No. 3 of the Chicago claim, which is a md. of stone with stone 6 x 8 x 8 ins. up in center, mkd. NY-4-2719 on S. and C-3-2719 on N. faces.
True course and dist. of SW side line of New York claim are therefore N.57°50'W., 18.65 chs.

Retracement of Patented

Patented Mining Claims in Township 8 North, Range 4 West.

Claims	
	<p>Mineral Survey No. 2388.</p> <p>"Atlantic" and "Ouija" Claims in secs. 30 and 31.</p> <p>Cor. No. 3 of the Goddard No. 6, Min. Sur. No. 2388, is a granite stone 8 x 10 x 8 ins. above ground, firmly set mkd. G-3-2388 on SW face, witnessed by md. of stone, SW of cor.</p> <p>Thence,</p> <p>N. 37° 00' W., on random line, on SW side line of the Ouija lode mining claim.</p>
9.90	<p>Intersect Cor. No. 3 of the Ouija claim, which is a granite 4 x 14 x 12 ins. above ground, firmly set, mkd. O-3-2388 on SE face, witnessed by a md. of stone, SE of cor.</p> <p>True course and dist. that part of the SW line of the Ouija claim retraced are therefore N. 37° W., 9.90 chs.</p>
9.09	<p>Thence,</p> <p>N. 64° E., on random line, on NW end line of the Ouija claim.</p> <p>Fail to find Cor. No. 3 of the Ouija claim, which is identical with Cor. No. 2 of the Atlantic lode mining claim.</p> <p>Thence,</p> <p>N. 64° E., on random line, on NE side line of the Atlantic claim, continuing measurement.</p>
13.67	<p>Intersect the NW end center Cor. of the "Atlantic" claim, which is a granite stone 6 x 14 x 10 ins. above ground firmly set, mkd. NEC-A on S. face.</p> <p>True course and dist. from Cor. No. 2 of the Ouija claim to NEC cor. of Atlantic are therefore N. 64° E., 13.67 chs.</p> <p>Thence,</p> <p>N. 64° E., on random line, on NW end line of the Atlantic claim.</p>
4.57	<p>Intersect Cor. No. 3 of the Atlantic Claim, which is a granite stone 6 x 10 x 9 ins. above ground, firmly set, mkd. A-3-2388 on SW face, witnessed by a md. of stone SW of cor.</p> <p>True course and dist. for E of the NW end line of the Atlantic claim are therefore N. 64° E., 4.57 chs.</p> <p>Thence,</p> <p>S. 37° E., on random line, on the NE side line of claim.</p>
22.82	<p>Intersect Cor. No. 4 of the Atlantic Claim which is identical with Cor. No. 3 of the Powhattan claim, Min. Sur. No. 2388, which is a granite stone 6 x 10 x 9 ins. above ground, firmly set, mkd. P-3-2388 on S. face, A-4-2388 on N. face, witnessed by md. of stone W. of cor.</p> <p>True course and dist. of the NE side line of the Atlantic claim are therefore S. 37° E., 22.82 chs.</p>

Resurvey of

BOOK 3892

Part of the Subdivision Lines of Township 8 North, Range 4 West.

Chains

The subdivision lines of T.8 N., R.4 W., bounding secs. 7, 8, 9, 28 and 33, the south halves of secs. 4 and 5, the lines bet. secs. 21 and 22, and bet. secs. 15 and 16 were surveyed in 1882 by W.A. Hancock, U.S.D.S. and no retracement or resurvey of any part of same is of record. No other subdivision lines in this township have been surveyed subsequent to the Hancock survey. The following notes describe a resurvey of all the surveyed subdivision lines of T.8 N., R.4 W.

Retracement for Resurvey.

From the reestablished sec. cors. on the S. bdy. of the Tp., retrace the subdivision lines bounding secs. 28 and 33 and the lines bet. secs. 21 and 22, and bet. secs. 15 and 16 on the record bearings and searching at record intervals for the original cor. monuments but fail to find any trace of any cor. referring to said secs., except the cor. secs. 9, 10, 15 and 16.

From original cor. secs. 9, 10, 15 and 16, hereinafter described.
 North, on random line, on E. bdy. secs. 9 ($S\frac{1}{2}$).
 40.37 Intersect the original $\frac{1}{4}$ sec. cor. secs. 9 and 10, hereinafter described.
 True course and dist. of $S\frac{1}{2}$ of E. Bdy. of sec. 9 are therefore North, 40.37 chs.

Thence,
 North, on random line, on E. Bdy. sec. 9 ($N\frac{1}{2}$).
 39.88 Intersect the original cor. secs. 3, 4, 9 and 10, hereinafter described.
 True course and dist. of $N\frac{1}{2}$ of E. Bdy. of sec. 9 are therefore North, 39.88 chs.

From original cor. secs. 3, 4, 9 and 10.
 North, on random line, on E. Bdy. of sec. 4, ($S\frac{1}{2}$).
 37.82 Fall 2 lks. E. of original $\frac{1}{4}$ sec. cor. of secs. 3 and 4, hereinafter described.
 True course and dist. of $S\frac{1}{2}$ of E. Bdy. of sec. 4 are therefore N.0°02'W., 37.82 chs.

From original cor. secs. 9, 10, 15 and 16.
 West, on random line, bet. secs. 9 and 16 ($E\frac{1}{2}$).
 39.94 Fall 56 lks. S. of the original $\frac{1}{4}$ sec. cor. secs. 3 and 4, hereinafter described.
 True course and dist. of $E\frac{1}{2}$ of line bet. secs. 9 and 16, are therefore N.89°12'W., 39.94 chs.

Thence,
 West, on random line, bet. secs. 9 and 16 ($W\frac{1}{2}$).
 39.84 Fall 50 lks. N. of the original cor. secs. 8, 9, 16 and 17, hereinafter described.
 True course and dist. of $W\frac{1}{2}$ of line bet. secs. 9 and 16 are therefore S.89°17'W., 39.84 chs.

From original cor. secs. 8, 9, 16 and 17.
 North, on random line, bet. secs. 8 and 9 ($S\frac{1}{2}$).
 39.92 Fall 12 lks. W. of original $\frac{1}{4}$ sec. cor. of secs. 8 and 9, hereinafter described.
 True course and dist. of $S\frac{1}{2}$ of line, bet. secs. 8 and 9 are therefore N.0°10'E., 39.92 chs.
 Thence, North, on random line, bet. secs. 8 and 9 ($N\frac{1}{2}$).

Resurvey of

Part of the Subdivision Lines of Township 8 North Range 4 West.

Chains	
40.07	Fall 58 lks. E. of original cor. secs. 4, 5, 8 and 9, hereinafter described. True course and dist. of $E\frac{1}{2}$ of line bet. secs. 8 and 9 are therefore $N.0^{\circ}50'W.$, 40.07 chs.
39.91	From original cor. secs. 3, 4, 9 and 10. $N.89^{\circ}56'W.$, on random line, bet. (secs. 4 and 9 ($E\frac{1}{2}$)). Fall 13 lks. N. of the original $\frac{1}{4}$ sec. cor. secs. 4 and 9, hereinafter described. True course and dist. of $E\frac{1}{2}$ of line bet. secs. 4 and 9 are therefore $S.89^{\circ}53'W.$, 39.91 chs. Thence
40.11	$N.89^{\circ}56'W.$, on random line bet. (secs. 4 and 9 ($W\frac{1}{2}$)). Fall 13 lks. N. of the original cor. secs. 4, 5, 8 and 9, hereinafter described. True course and dist. of $W\frac{1}{2}$ of line bet. secs. 4 and 9 are therefore $S.89^{\circ}53'W.$, 40.11 chs.
39.76	From original cor. secs. 4, 5, 8 and 9. North, on random line, bet. secs. 4 and 5 ($S\frac{1}{2}$). Fall 29 lks. E. of original $\frac{1}{4}$ sec. cor. secs. 4 and 5, hereinafter described. True course and dist. of $S\frac{1}{2}$ of line bet. secs. 4 and 5 are therefore $N.0^{\circ}25'W.$, 39.76 chs.
40.00	From original cor. secs. 8, 9, 16 and 17. West, on random line, bet. secs. 8 and 17. No trace of original $\frac{1}{4}$ sec. cor. can be found.
80.00	No trace of original cor. secs. 7, 8, 17 and 18 can be found. Continue line and measurement bet. secs. 7 and 18 ($E\frac{1}{2}$).
120.09	Fall 77 lks. N. of original $\frac{1}{4}$ sec. cor. secs. 7 and 18, hereinafter described. Thence, $N.89^{\circ}38'E.$, on trial line bet. secs. 7 and 18 ($E\frac{1}{2}$).
40.03	Set temp. cor. (A) of secs. 7, 8, 17 and 18. From original $\frac{1}{4}$ sec. cor. secs. 7 and 8, hereinafter described. South, on random line, bet. secs. 7 and 8 ($S\frac{1}{2}$).
40.00	No trace of original cor. secs. 7, 8, 17 and 18 can be found. Set temp. cor. (B) of said secs. at this point. From temp. sec. cor. (B) the temp. cor. (A) of said secs. brs. East, 40 lks. dist. The point for reestablishment of the missing cor. secs. 7, 8, 17 and 18 is therefore at temp. cor. (A) of said secs. The resulting true courses and distances of the subdivision lines extending E.; W. and N., from this reestablished cor. point are as follows: Line bet. secs. 8 and 17: $S.89^{\circ}38'W.$, 80.06 chs. $E\frac{1}{2}$ of line bet. secs. 7 and 18: $S.89^{\circ}38'W.$, 40.03 chs. $S\frac{1}{2}$ of line bet. secs. 7 and 8: $N.0^{\circ}34'W.$, 40.00 chs.
38.76	From original $\frac{1}{4}$ sec. cor. secs. 7 and 18. West, on random line, bet. secs. 7 and 18 ($W\frac{1}{2}$). Fall 3.25 chs. S. of the cor. secs. 7, 12, 13 and 18 on W. bdy. of Tp., as hereinbefore described. True course and dist. of $W\frac{1}{2}$ of line bet. secs. 7 and 18 are therefore $N.85^{\circ}12'W.$, 38.90 chs.
39.80	From original $\frac{1}{4}$ sec. cor. secs. 7 and 8. North, on random line, bet. secs. 7 and 8 ($N\frac{1}{2}$). Fall 17 lks. E. of the original cor. secs. 5, 6, 7 and 8, hereinafter described. True course and dist. of $N\frac{1}{2}$ of line bet. secs. 7 and 8 are therefore $N.0^{\circ}15'W.$, 39.80 chs.

Part of the Subdivision Lines of Township 8 North, Range 4 West.

Chains

39.88 From original cor. secs. 4, 5, 8 and 9, S.89°53'W., on random line, bet. secs. 5 and 8. No trace of original 1/4 sec. cor. can be found. Set temp. 1/4 sec. cor. and continue line and measurement.

79.96 Fall 81 lks. N. of original cor. secs. 5, 6, 7 and 8, hereinafter described. True course and dist. of line bet. secs. 5 and 8 are therefore S.89°18'W., 79.96 chs.

36.79 From original cor. secs. 5, 6, 7 and 8, West, on random line, on N. Bdy. sec. 7 (E 1/4). Fall 93 lks. N. of original 1/4 sec. cor. of secs. 6 and 7, hereinafter described. True course and dist. of E 1/4 of N. bdy. sec. 7 are therefore S.88°33'W., 36.80 chs.

42.04 From original 1/4 sec. cor. secs. 6 and 7, West, on random line, on N. Bdy. sec. 7, (W 1/4). Fall 406 lks. S. of the cor. secs. 1, 6, 7 and 12, on W. bdy. of Tp., hereinbefore described. True course and dist. of W 1/4 of N. Bdy. sec. 7 are therefore N.84°30'W., 42.25 chs.

40.10 From original cor. secs. 5, 6, 7 and 8, North, on random line, bet. secs. 5 and 6 (S 1/4). Fall 33 lks. E. of the original 1/4 sec. cor. secs. 5 and 6 hereinafter described. True course and dist. of S 1/4 of line bet. secs. 5 and 6 are therefore N.0°28'W., 40.10 chs.

RESURVEY.

From the reestablished cor. secs. 3, 4, 33 and 34, on S. Bdy. of Tp., hereinbefore described. N.0°02'W., on true line, bet. secs. 33 and 34. Over rolling land, thru scattering timber and thick undergrowth.

3.60 Asc. 11 ft. over S. slope.

5.00 Point of spur, brs. SW. Over level top.

8.60 Lv. top, desc. 23 ft. over NW slope.


20.90 Wash, 30 lks. wide, course SW. Asc. gradual SE slope, 57 ft.

23.10 Old road, brs. NE-SW.

33.50 Spur, brs. SW. Desc. gradually over NW slope.

35.40 Old road, brs. NE-SW.

40.00 Wash, 20 lks. wide, course SW. Asc. 22 ft. over SE slope. Spur, brs. SW. Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post for the reestablished 1/4 sec. cor. secs. 33 and 34, with brass cap mkd.



1929

No bearing trees available.

43.10 Desc. 95 ft. over NW slope. Head of ravine, course SW. Asc. 112 ft. over SE slope.

51.90 Spur, brs. SW. Desc. 95 ft. over NW slope.

58.65 Wash 20 lks. wide, course SW. Asc. 89 ft. over SE slope.

65.90 Spur, brs. SW. Desc. 62 ft. over NW slope.


Resurvey of

Part of the Subdivision Lines of Township 8 North Range 4 West.

Chains

73.22
74.40
77.80
80.00

Wash, 10 lks. wide; course SW. Asc. 29 ft. over SW slope.
Sharp spur; brs. W. Desc. 95 ft. over N. slope.
Center of wash, 40 lks. wide, course West.
Set an iron post 3 ft. long; 2 ins. in diam., 24 ins. in
the ground for the reestablished cor. secs. 27, 28, 33
and 34, with brass cap mkd.



1929

No bearing trees available; raise a md. of stone
4 ft. base, 2 ft. high W. of cor.

Land, rolling.
Soil, rocky 4th. rate.
Timber, palo verde, mesquite and ironwood.
Undergrowth, greasewood, catclaw and cacti.

5.00

N.0°02'W., on true line, bet. secs. 27 and 28.
Over rolling land, thru scattering timber and undergrowth.
Graded road, from Wickenburg to Monte Cristo Mine, brs.
NE-SW.; on ridge, which brs. NE-SW.

14.00

Wash, 1 ch. wide, course SW.

15.25

Telephone line, brs. NE-SW.

24.00

Center of wash, 200 lks. wide, course SW.

40.00

Set an iron post 3 ft. long, 1 in. in diam., 10 ins. in
the ground to bedrock, deposit a stone mkd. with a
cross (X) at base of post, raise a md. of stone about
post for the reestablished $\frac{1}{4}$ sec. cor. secs. 27 and
28, with brass cap mkd.



1929

from which,

a palo verde, 6 ins. in diam., brs. S.6°W., 17 lks.
dist., mkd. $\frac{1}{4}$ S 28 BT


a palo verde, 6 ins. in diam., brs. N.88 $\frac{1}{2}$ °E., 75 lks.
dist., mkd. $\frac{1}{4}$ S27 BT

73.10

Center of wash, 150 lks. wide, course SW.

80.00

Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in
the ground for the reestablished cor. secs. 21, 22,
27 and 28, with brass cap mkd.



1929

from which,

a palo verde, 6 ins. in diam., brs. N.15 $\frac{1}{2}$ °E., 67 lks.
dist., mkd. T8N R4W S22 BT

a palo verde, 6 ins. in diam., brs. S.1°E., 24 lks.
dist., mkd. T8N R4W S27 BT

No other bearing trees available; raise a md. of
stone 4 ft. base, 2 ft. high W. of cor.


Land, rolling.
Soil, rocky 4th. rate.
Timber, palo verde, mesquite and ironwood.
Undergrowth, greasewood, catclaw and cacti.

Part of the Subdivision Lines of Township 8 North, Range 4 W.

Chains					
	N.0°02'W., on true line, bet. secs. 21 and 22. Over rolling land, thru scattering timber and undergrowth. Asc. 16 ft. over S. slope.				
2.00	Spur, brs. SW. Desc. 11 ft. over SE slope.				
4:50	Wash, 10 lks. wide, course SW. Asc. 40 ft. over SE slope.				
12.00	Spur, brs. SW. Desc. gradual NW slope.				
18.00	Wash, 10 lks. wide, near head, course SW. Asc. gradual SE slope.				
22.10	Small frame house, brs. East, 10 lks., goat pens bear west about 3 chs. distant. Desc. 69 ft. over N. slope.				
30.00	Enter level bottom of wash, brs. E-W.				
35.00	Center of wash, 30 lks. wide, course West. Asc. 59 ft. over SE slope.				
39.00	Spur, brs. West. Desc. 19 ft. over N. slope to				
40.00	Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the reestablished $\frac{1}{4}$ sec. cor. secs. 21 and 22, with brass cap mkd.				
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2" style="text-align: center;">1929</td></tr> <tr><td style="text-align: center;">S21</td><td style="text-align: center;">S22</td></tr> </table>	1929		S21	S22
1929					
S21	S22				
	No bearing trees available; raise a md. of stone 3 ft. base, 2 ft. high W. of cor.				
	Over mountainous land. Desc. 41 ft. over N. slope.				
43.90	Center of Blue Tank wash, 1 ch. wide, course SW. Asc. 148 ft. over rocky SE slope.				
51.50	Spur, brs. SW. Desc. 187 ft. over NW slope.				
59.90	Wash, 30 lks. wide, course SW. Asc. 194 ft. over SE slope.				
76.50	Ridge, brs. E-W. Desc. 34 ft. over NW slope.				
80.00	Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for the reestablished cor. secs. 15, 16, 21 and 22, with brass cap mkd.				
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2" style="text-align: center;">1929</td></tr> <tr><td style="text-align: center;">S21</td><td style="text-align: center;">S22</td></tr> </table>	1929		S21	S22
1929					
S21	S22				
	No bearing trees available; raise a md. of stone 3 ft. base, 1 1/2 ft. high W. of cor.				
	Land, rolling and mountainous. Soil, rocky 4th. rate. Timber, palo verde, mesquite and ironwood. Undergrowth, cacti, catclaw and greasewood.				
77.43	From original cor. of secs. 9, 10, 15 & 16, S.0°02'E. on random line, Fall 39 lks. W. of cor. secs. 15, 16, 21 and 22. Thence, N.0°09'W., on true line, and E. bdy. of sec. 15. Over mountainous land, thru scattering timber and undergrowth.				
6.60	Spur, brs. NW. Desc. 103 ft. over NE slope.				
12.90	Wash, 10 lks. wide, course NW. Asc. 23 ft. over SW slope.				
20.60	Short spur, brs. W. Desc. 17 ft. over NW slope.				
22.40	Wash, 20 lks. wide, course SW. Asc. 92 ft. over S. slope.				
40.00	Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, raise a md. of stone about post, for the reestablished $\frac{1}{4}$ sec. cor. secs. 15 and 16, with brass cap mkd.				

Resurvey of Part of the Subdivision Lines of Township 8 North, Range 4 West.

Chains.




1929 from which,
 a palo verde 8 ins. in diam., brs. N.22°W., 47 lks.
 dist., mkd. 1/4 S16 BT
 a palo verde, 10 ins. in diam., brs. S.23°E., 140 lks.
 dist., mkd. 1/4 S15 BT

- 43.85 Desc. 39 ft. over NW slope.
- 45.00 Head of small ravine, course W. Asc. 39 ft. over SW slope.
- 47.20 Spur, brs. W. Desc. 23 ft. over N. slope.
- 49.00 Wash, (center) 1 ch. wide, course W. Asc. 20 ft. over S. slope.
- 51.50 Spur, brs. West. Desc. 24 ft. over N. slope.
- 60.40 Center of wash, 3 chs. wide, course SW. Asc. 108 ft. over S. slope.
- 69.00 Spur, brs. W. Desc. 136 ft. over NW slope.
- 75.50 Wash, 30 lks. wide, course SW. Asc. 81 ft. over S. slope.
- 77.43 Spur, brs. SW. Desc. 40 ft. over N. slope to

Intersect the original cor. secs. 9, 10, 15 and 16, which is an old md. of stone 4 ft. base, 2 ft. high, in center of which is a palo verde stake 4 ins. sq., badly rotted. Find no trace of the original cor. stone. Reconstruct this cor. monument and alter its reference as follows:

Alongside old stake and in center of original md. stone, set an iron post 3 ft. long, 2 ins. in diam., 16 ins. in the ground to bedrock; deposit a stone mkd. with a cross (X) at base of post, for cor. of secs. 9 and 16 only, with brass cap mkd. established cor. secs. 9 and 16 only, with brass cap mkd.




1929
 No bearing trees available;

Land, mountainous.
 Soil, rocky 4th. rate.
 Timber, palo verde, mesquite and ironwood.
 Undergrowth, cacti, catclaw and greasewood.

North, on true line, ~~and East side, sec. 10.~~ (S15).
 Over mountainous land, thru scattering timber and undergrowth.
 Desc. 36 ft. over N. slope.

- 2.57 (80.00 chs. in latitude from cor. secs. 15, 16, 21 and 22.) Set an iron post 3 ft. long, 2 ins. in diam., 16 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post for the reestablished cor. secs. 10 and 15 only, with brass cap mkd.



1929 No bearing trees available.
 Continue line and measurements.

- 5.00 Wash, 15 lks. wide, course NW. Asc. 55 ft. over S. slope.

Resurvey of Part of the Subdivision Lines of Township 8 North, Range 4 West

BOOK 3892

chains

12.00 Spur, brs. West. Desc. 170 ft. over NE. slope,
 15.90 Wash, 10 lks.wide, course NW. Asc.24 ft.over SW. slope.
 25.50 Spur, brs. NW. Desc. 111 ft. over N. slope.
 28.60 Wash, 30 lks.wide, course W. Asc.201 ft.over SW. slope.
 40.37 Spur, brs. NW. Intersect the original $\frac{1}{4}$ sec.cor. of secs. 9 and 10, which is a mound of stone, 4 ft.base, 2 ft. high. Find no trace of the marked stone corner mon. Reconstruct this corner monument, and alter its.reference as follows:
 alongside the mound of stone, set an iron post, 3 ft. long, 1 in.in diam.,16 ins.in the ground to bedrock, deposit a stone mkd. with a cross(X) at base of post, and raise a mound of stone about post, for $\frac{1}{4}$ sec.cor. of sec.9 only, with brass cap mkd.

$\frac{1}{4}$ S9

1929

No bearing trees available.

Thence North, on true line, on E. bdy.of sec.9 (N. $\frac{1}{2}$) Over mountainous land,thru scattering timber and undergrowth.

Desc. 49 ft. over N. slope to

2.20 (40.00 chs.in lat. from cor.of secs.10 and 15) Set an iron post, 3 ft.long, 1 in.in diam.,16 ins.in the ground to bedrock, deposit a stone mkd. with a cross(X) at base of post,and raise a mound of stone about post, for reestablished $\frac{1}{4}$ sec.cor.of sec.10 only,with brass cap mkd.

$\frac{1}{4}$ S10

1929

No bearing trees available.

Desc. 99 ft. over N. slope.

7.10 Wash, 20 lks.wide, course NW. Asc.80 ft.over SW. slope.
 12.40 Spur, slopes NW. Desc. 132 ft.over NW. slope to
 15.00 Enter bottom of the Hassayampa River,bearing E. and W. Thence across sandy river bottom.

25.50 Stream of water, 70 lks.wide,course West.

27.85 Wire fence, brs.NW. and SE. Turns to E. at about 2.00 chs. SE. of this point.

33.60 Road, brs. E.-W.

34.00 Leave Hassayampa River bottom. Asc.42 ft.over S. slope to

39.88 Intersect the original cor.of secs.3,4,9 and 10, which is a stone, 10 x 8 x 6 ins. above ground, firmly set, mkd. 3 on NE.face, 10 on SE., 9 on SW., and 4 on NW. face, and witnessed by a mound of stone, W. of cor. No bearing trees.

Reconstruct this cor.monument, and alter its reference as follows:

alongside old cor. stone,set an iron post, 3 ft.long, 2 ins.in diam.,20 ins.in the ground to bedrock, and raise a mound of stone about post, for cor.of secs.4 and 9 only, with brass cap mkd.

T8N	RAW
S4	S10
S9	

1929

No bearing trees available.


Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, paloverde,mesquite,ironwood and cottonwood.
 Undergrowth, cacti,cactlaw,arrowweed and greasewood.

Resurvey of
Part of the Subdivision Lines of Township 8 North, Range 4 West

chains

From cor. of secs. 4 and 9,
N.0° 2'W., on true line, on E. bdy. of sec. 4 (S. 1/2)
Over rolling land, thru scattering timber and dense
undergrowth.

Asc. slightly over S. slope to
2.32 (80.00 chs. in lat. from cor. of secs. 10 and 15) Set an iron
post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground
to bedrock, deposit a stone marked with a cross (X) at
base of post, and raise a mound of stone about post,
for reestablished cor. of secs. 3 and 10 only, with
brass cap mkd.



No bearing trees available.


Thence over level land.

8.42 Wire fence, brs. NW.-SE.
9.00 Leave level land. Desc. 34 ft. over NE. slope.
10.00 Foot of slope brs. NW.-SE. Thence across level bottom land.
32.50 Leave level bottom land. Asc. 46 ft. over S. slope.
35.00 Spur, brs. SE. Desc. gradually over NE. slope.
37.60 Wire fence, brs. NW.-SE.

37.82 Intersect the original 1/4 sec. cor. of secs. 3 and 4, which
is a pine post, 4 ins. square, projecting 3 ft. above
ground, firmly set in ground and mound of stone. No
bearing trees.

Reconstruct this cor. monument, and alter its reference
as follows:

remove the mound of stone, and alongside the pine post,
set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in
the ground to bedrock, deposit a stone mkd. with a
cross (X) at base of post, and raise a mound of stone
about both posts, for 1/4 sec. cor. of sec. 4 only, with
brass cap mkd.




No bearing trees available.

From this 1/4 sec. cor. a house brs. N. 89° E., about 8 chs.
dist.

Land, rolling and level.
Soil, rocky, 4th rate.
Timber, paloverde, ironwood and cottonwood.
Undergrowth, cacti, greasewood, catclaw and arrowweed.

From reestablished cor. of secs. 4, 5, 32 and 33, on the S.
bdy. of the Tp., hereinbefore described,
N.0° 2'W., on true line, bet. secs. 32 and 33.
Over rolling land, thru scattering timber and undergrowth.
Desc. 10 ft. over NW. slope.

1.50 Wash, 20 lks. wide, course SW.
6.60 Old road, brs. E.-W.
21.00 Low spur, brs. S. 20° W. Desc. 21 ft. over SW. slope.
34.05 Wash, 20 lks. wide, course SW. Asc. 57 ft. over SE. slope
to 1/4 sec. cor.
34.50 Telephone line, brs. NE.-SW.
37.00 Graded road, brs. NE.-SW.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the
ground, for reestablished 1/4 sec. cor. of secs. 32 and 33,
with brass cap mkd.



Resurvey of Part of the Subdivision Lines of Township 8 North, Range 4 West

BOOK 3892

chains	<p>No bearing trees available. raise a mound of stone, 4 ft. base, 2 ft. high, W. of cor. Enter mountainous land, Asc. 81 ft. over SE. slope.</p>						
44.60	Spur, brs. SW. Desc. 131 ft. over NW. slope.						
49.45	Wash, 30 lks. wide, course W. Asc. 85 ft. over S. slope.						
51.50	Spur, brs. W. Desc. 20 ft. over N. slope.						
53.50	Wash, 30 lks. wide, course SW. Asc. 66 ft. over SE. slope.						
66.00	Spur, brs. SW. Desc. 22 ft. over N. slope.						
74.00	Wash, 10 lks. wide, course SW. Asc. 19 ft. over S. slope.						
79.00	Spur, brs. SW. Desc. slightly over N. slope to						
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for reestablished cor. of secs. 28, 29, 32 and 33, with brass cap mkd.						
	<table border="1"> <tr> <td>T8N</td> <td>R4W</td> </tr> <tr> <td>S29</td> <td>S28</td> </tr> <tr> <td>S32</td> <td>S33</td> </tr> </table>	T8N	R4W	S29	S28	S32	S33
T8N	R4W						
S29	S28						
S32	S33						
	1929						
	<p>No bearing trees available. raise a mound of stone, 4 ft. base, 2 ft. high, W. of cor. Land, rolling and mountainous. Soil, rocky, 4th rate. Timber, paloverde, mesquite and ironwood. Undergrowth, greasewood, catclaw and cacti.</p>						

40.00	East, on random line, bet. secs. 28 and 33. Set temp. $\frac{1}{4}$ sec. cor.						
79.92	Fall 2 lks. S. of cor. of secs. 27, 28, 33 and 34. Thence S. 89° 59' W., on true line, bet. secs. 28 and 33. Over rolling land, thru scattering timber and undergrowth. Desc. gradually over S. slope.						
7.32	Low spur, brs. SW. Graded road, Brs. NE.-SW. Desc. 46 ft. over W. slope.						
31.90	Wash, 40 lks. wide, course SW. Asc. gradually over SE. slope.						
38.90	Spur, brs. SW. Desc. 9 ft. over W. slope to						
39.96	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 28 and 33, with brass cap mkd.						
	<table border="1"> <tr> <td>S 28</td> </tr> <tr> <td>$\frac{1}{4}$</td> </tr> <tr> <td>S 33</td> </tr> </table>	S 28	$\frac{1}{4}$	S 33			
S 28							
$\frac{1}{4}$							
S 33							
	1929						
	<p>No bearing trees available. raise a mound of stone, 4 ft. base, 2 ft. high, N. of cor. Desc. gradually over W. slope.</p>						
48.72	Wash, 40 lks. wide, course SW. Asc. 20 ft. over SE. slope.						
53.40	Spur, brs. SW. Desc. 29 ft. over W. slope.						
61.82	Wash, 30 lks. wide, course SW. Asc. slightly over SE. slope.						
67.95	Low spur, brs. SW. Asc. 19 ft. to						
75.43	Spur, brs. SW. Desc. gradually over NW. slope to						
79.92	Intersect the reestablished cor. of secs. 28, 29, 32 and 33. Land, rolling. Soil, rocky, 3rd and 4th rate. Timber, paloverde, mesquite and ironwood. Undergrowth, greasewood, catclaw and cacti.						

	<p>N. 0° 2' W., on true line, bet. secs. 28 and 29. Over rolling land, thru scattering timber and undergrowth. Desc. gradually over NW. slope.</p>						
3.00	Wash, 10 lks. wide, course SW. Asc. gradually over SW. slope.						
18.20	Wash, 50 lks. wide, course SW.						

Resurvey of Part of the Subdivision Lines of Township 8 North, Range 4 West

chains
 28.40 Wash, 30 lks.wide, course SW. Asc.29 ft.over S.slope to
 40.00 Set an iron post, 3 ft.long, 1 in.in diam.,26 ins.in the
 ground, for reestablished $\frac{1}{4}$ sec.cor.of secs.28 and 29,
 with brass cap mkd.

$\frac{1}{4}$
 S29 | S28

1929

from which
 a paloverde, 6 ins.in diam., brs.N.89 $\frac{1}{2}$ °W., 35 lks.
 dist., mkd. $\frac{1}{4}$ S29 BT
 a paloverde, 6 ins.in diam., brs.N.83 $\frac{1}{4}$ °E., 108 lks.
 dist., mkd. $\frac{1}{4}$ S28 BT

Asc. 26 ft.over S. slope.
 47.80 Spur, brs. SW. Desc. 50 ft.over NW. slope.
 53.20 Wash, 20 lks.wide, course SW. Asc. gradual SE.slope.
 60.00 Spur, brs. SW. Desc.34 ft.over NW. slope.
 62.50 Wash, 20 lks.wide, course SW. Asc.54 ft.over SE.slope.
 75.30 Spur, brs. SW. Desc.67 ft.over NW.slope to
 80.00 Set an iron post, 3 ft.long, 2 ins.in diam.,26 ins.in
 the ground, for reestablished cor.of secs.20,21,28
 and 29, with brass cap mkd.

T8N | R4W
 S20 | S21
 S29 | S28

1929

No bearing trees available.
 raise a mound of stone,4 ft.base,2 ft.high,W.of cor.
 Land, rolling.
 Soil, rocky, 4th rate.
 Timber, paloverde,mesquite and ironwood.
 Undergrowth, greasewood,catclaw and cacti.

N.89°59'E., on random line, bet. secs.21 and 28.
 40.00 Set temp. $\frac{1}{4}$ sec.cor.
 80.06 Intersect the cor.of secs.21,22,27 and 28,
 Thence
 S.89°59'W., on true line, bet. secs.21 and 28.
 Over rolling land, thruscattering timber and undergrowth.
 Desc. gradually over NW. slope.
 3.00 Wash, 10 lks.wide, course SW. Asc.20 ft.over SE.slope.
 6.00 Spur, brs. S. Desc. slightly over W. slope.
 6.30 Wash, course S. Asc. 28 ft. over SE. slope.
 9.00 Spur, brs. S. Desc. 40 ft. over SW. slope.
 12.20 Wash, 10 lks.wide, course SW. Asc.165 ft.over SE.slope.
 20.50 Spur, brs. SW. Desc. 70 ft.over W. slope.
 25.00 Head of wash, course SW. Asc.63 ft.over SE.slope.
 30.45 Spur, brs. SW. Desc. 44 ft.over W. slope.
 35.20 Head of wash, course SW. Asc.14 ft.over SE.slope to
 40.03 Spur, brs. SW. Set an iron post, 3 ft.long, 1 in.in
 diam.,18 ins.in the ground to bedrock,and raise a md.
 of stone about post, for reestablished $\frac{1}{4}$ sec.cor.of
 secs.21 and 28, with brass cap mkd.

S 21
 $\frac{1}{4}$ ———
 S 28

1929

No bearing trees available.
 raise a mound of stone,4 ft.base,2 ft.high,N.of cor.
 Enter mountainous land. Desc.113 ft.over NW. slope.

Resurvey of Part of the Subdivision Lines of Township 8 North, Range 4 West

BOOK 3892

chains


65.00 Asc. slightly over SE. slope.
 67.40 Spur, brs. SW. Desc. 98 ft. over NW. slope to
 80.06 Intersect the reestablished cor. of secs. 20, 21, 28 and 29.
 Land, rolling and mountainous.
 Soil, rocky, 4th rate.
 Timber, paloverde, mesquite and ironwood.
 Undergrowth, cacti, greasewood and catclaw.

From the cor. of secs. 9 and 16,
 N. 89° 12' W., on true line, bet. secs. 9 and 16 (E. 1/2)
 Over mountainous land, thru scattering timber and under-
 growth.

24.90 Desc. 190 ft. over N. and NE. slopes to
 Spur, brs. NW. Desc. gradually over SW. slope.
 33.40 Wash, 10 lks. wide, course SW. Asc. 24 ft. over SE. slope.
 39.00 Same spur, brs. SW. and W. Desc. gradually along N. slope
 near top of spur.

39.94 Intersect original 1/4 sec. cor. of secs. 9 and 16, which is
 a granite stone 12 x 8 x 6 ins. above ground, firmly
 set, mkd. 1/4 on N. face. No bearing trees or other
 accessories.

Reconstruct this cor. monument as follows:
 alongside old cor. stone, set an iron post, 3 ft. long,
 1 in. in diam., 20 ins. in the ground to bedrock, and raise
 a mound of stone about post, for 1/4 sec. cor. of secs. 9
 and 16, with brass cap mkd.



1929


No bearing trees available.

Thence
 S. 89° 17' W., on true line, bet. secs. 9 and 16 (W. 1/2)
 Over mountainous land, thru scattering timber and under-
 growth.

Desc. gradually over N. slope near top of spur.
 5.90 Same spur, brs. NW. Desc. 135 ft. over W. slope.
 13.25 Wash, 10 lks. wide, course N. Asc. 135 ft. over NE. slope.
 22.74 Spur, brs. NW. Desc. 167 ft. over SW. slope.
 31.05 Center of wash, 150 lks. wide, course NW.
 Asc. 34 ft. over NE. slope.

36.63 Point of spur, brs. N. Desc. 56 ft. over NW. slope to
 39.84 Intersect the original cor. of secs. 8, 9, 16 and 17, which
 is a mesquite post, 4 ins. in diam., squared at top,
 projecting 2 ft. above ground, firmly set, and surround-
 ed by a mound of stone. No bearing trees.

Reconstruct this cor. monument as follows:
 remove the mound of stone, and alongside the mesquite
 post set an iron post, 3 ft. long, 2 ins. in diam., 18 ins.
 in the ground to bedrock, deposit a stone mkd. with a
 cross (X) at base of post, and raise a mound of stone
 about both posts, for cor. of secs. 8, 9, 16 and 17, with
 brass cap mkd.



1929

No bearing trees available.

Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, paloverde, mesquite and ironwood.
 Undergrowth, greasewood, cacti and catclaw.

Resurvey of
Part of the Subdivision Lines of Township 8 North, Range 4 West


chains

N.0°10'E., on true line, bet. secs. 8 and 9 (S. $\frac{1}{2}$)
 Over rolling land, thru scattering timber and undergrowth.
 Desc. gradually over NW. slope.

2.00 Enter wash, course NW. Thence across wash.
 4.80 Leave wash, Asc. 55 ft. over SW. slope.
 8.40 Point of spur, brs. NW. Desc. 55 ft. over NW. slope.
 12.30 Enter Hassayampa River bottom, brs. E.-W.
 19.10 Stream of water, 30 lks. wide, 3 ins. deep, course W.
 28.80 Wire fence corner, from which fences extend W. and N.
 Thence along fence.

31.30 Leave Hassayampa River bottom, Asc. 52 ft. over SE. slope.
 33.10 Edge of mesa, brs. NE.-SW. Thence over level mesa.
 39.92 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 8 and 9, which
 is a granite stone 12 x 8 x 6 ins. above ground, firmly
 set, mkd. $\frac{1}{4}$ on W. face. No bearing trees or other
 accessories.

Reconstruct this cor. monument as follows:
 alongside old cor. stone, set an iron post, 3 ft. long,
 1 in. in diam., 20 ins. in the ground to bedrock, and
 raise a mound of stone about post, for $\frac{1}{4}$ sec. cor. of
 secs. 8 and 9, with brass cap mkd.



1929

No bearing trees available.

This $\frac{1}{4}$ sec. cor. is alongside a corner of wire fence
from which fences extend W. and S.

U.S.G.S. BM 3187 brs. S. 34°52'W.


J. Cameron's house brs. N. 83°E.

Thence

N.0°50'W., on true line, bet. secs. 8 and 9 (N. $\frac{1}{2}$)
 Over level mesa, thru scattering timber and undergrowth.
 Road, brs. E.-W. Wickenburg to Cameron Ranch.

4.10 Dim road, brs. NE.-SW.
 22.75 Leave mesa, brs. E.-W. Asc. 34 ft. over S. slope to
 32.00 Desc. gradually over NE. slope to
 33.00
 40.07 Intersect original cor. of secs. 4, 5, 8 and 9, which is a
 granite stone 12 x 8 x 6 ins. above ground, firmly set,
 mkd. with 4 grooves on E. face, and 5 grooves on S. face,
 and witnessed by a mound of stone W. of cor. No bearing
 trees.

Reconstruct this cor. monument as follows:
 alongside old cor. stone, set an iron post, 3 ft. long,
 2 ins. in diam., 20 ins. in the ground to bedrock, and
 raise a mound of stone about post, for cor. of secs. 4,
 5, 8 and 9, with brass cap mkd.



1929

No bearing trees available.

U.S.G.S. BM. 3187 brs. S. 27°35'W.

Land, rolling and level.

Soil, on mesa, gravelly black loam, 3rd rate; on slopes
rocky, 4th rate.

Timber, paloverde, mesquite and ironwood. Cottonwood and
willow in river bottom.

Undergrowth, greasewood, cacti and catclaw.

From the cor. of secs. 4 and 9,
 S. 89°53'W., on true line, bet. secs. 4 and 9. (E. $\frac{1}{2}$)
 Over rolling land, thru scattering timber and undergrowth.
 Descend gradually over S. slope.

15.00 Desc. 36 ft. over W. slope to
 18.60 E. edge of wash, brs. N.-S. Thence across wash, course S.

Resurvey of Part of the Subdivision Lines of Township 8 North, Range 4 West BOOK 3892

chains
 22.58 Wire fence, brs. N.-S.
 28.20 Road, brs. N.-S.
 30.00 West Edge of wash, brs. N.-S. Leave wash. Asc. 52 ft. over E. slope to
 31.60 Rim of mesa, brs. N.-S. Thence over level mesa.
 39.91 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 4 and 9, which is a granite stone 10 x 6 x 5 ins. above ground, firmly set, mkd. $\frac{1}{4}$ on N. face, and witnessed by a mound of stone N. of cor. No bearing trees.
 Reconstruct this cor. monument as follows:
 alongside old cor. stone, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 4 and 9, with brass cap mkd.

$$\begin{array}{c} S\ 4 \\ \frac{1}{4} \text{---} \\ S\ 9 \end{array}$$

1929

No bearing trees available.
 U.S.G.S. BM. 3187 brs. S. $37\frac{1}{2}^{\circ}$ W.
 Fence corner from which fences extend W., S. and E., brs. S. $81\frac{3}{4}^{\circ}$ W., about 5.00 chs. dist.
 Thence
 S. $89^{\circ}53'$ W., on true line, bet. secs. 4 and 9 (W. $\frac{1}{2}$)
 Over level mesa, thru scattering timber and undergrowth.
 0.20 Old road, brs. N.-S.
 11.20 Road, brs. NE.-SW.
 13.20 Rim of mesa, brs. N.-S. Wire fence, brs. N.-S. Fence corner brs. S. about 70 lks. dist., from which fences extend E. and N.
 Leave mesa, and enter rolling land. Desc. over W. slope.
 15.50 Small ravine, course S. Asc. 45 ft. over SE. slope.
 28.70 Center of flat top of spur, 1.00 ch. wide, brs. S.
 Desc. 35 ft. over W. slope.
 33.00 Wash, 20 lks. wide, course SE. Asc. gradually over NE. slope to
 40.11 Intersect the cor. of secs. 4, 5, 8 and 9.
 Land, rolling and level.
 Soil, gravelly and rocky, 3rd and 4th rate.
 Timber, mesquite, ironwood and paloverde.
 Undergrowth, greasewood, catclaw and cacti.

N. $0^{\circ}25'$ W., on true line, bet. secs. 4 and 5 (S. $\frac{1}{2}$)
 Over rolling land, thru scattering timber and undergrowth.
 Desc. 46 ft. over NE. slope.
 11.50 Wash, 20 lks. wide, course SE. Fence, brs. E.-W.
 Asc. 69 ft. over SW. slope.
 30.00 Spur, brs. SE. Desc. 23 ft. over NE. slope to
 39.76 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 4 and 5, which is a granite stone 10 x 8 x 6 ins. above ground, firmly set, mkd. $\frac{1}{4}$ on W. face, and witnessed by a mound of stone W. of cor. No bearing trees.
 Reconstruct this cor. monument as follows:
 alongside the old cor. stone, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 4 and 5, with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ S5 \quad | \quad S4 \end{array}$$

1929

from which

a paloverde, 8 ins. in diam., brs. S. 19° E., 113 lks. dist., mkd. $\frac{1}{4}$ S4 BT
 a paloverde, 8 ins. in diam., brs. S. 65° W., 109 lks. dist., mkd. $\frac{1}{4}$ S5 BT

Land, rolling.

Resurvey of
Part of the Subdivision Lines of Township 8 North, Range 4 West

chains

Soil, rocky, 4th rate.
Timber, paloverde, ironwood and mesquite.
Undergrowth, greasewood, catclaw and cacti.

From the cor. of secs. 8, 9, 16 and 17,
S. 89° 38' W. on true line bet. secs. 8 and 17.
Over rolling land, thru scattering timber and undergrowth.
Asc. 146 ft. over N. slope.

13.20 Spur, brs. NW. Desc. 99 ft. over SW. slope.

17.06 Wash, 20 lks. wide, course NW. Asc. gradually over NE. slope.

21.66 Spur, brs. NW. Desc. 124 ft. over SW. slope.

26.55 Wash, 10 lks. wide, course NW. Asc. 10 ft. over NE. slope.

30.05 Top of bank, brs. NW.-SE. Leave rolling and enter level land.

39.50 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for witness cor. to reestablished $\frac{1}{4}$ sec. cor. of secs. 8 and 17, with brass cap mkd.

WC $\frac{1}{4}$ $\frac{S\ 8}{S\ 17}$

1929

from which

a cottonwood, 30 ins. in diam., brs. N. 84° E., 33 lks. dist., mkd. WC $\frac{1}{4}$ S 8 BT

a cottonwood, 26 ins. in diam., brs. S. 74° E., 23 lks. dist., mkd. WC $\frac{1}{4}$ S 17 BT

House of Ramon Valencia brs. S. 78° E., 3 chs. dist.

Rich Hill brs. N. 7° W.

Sam Powell Peak in T. 9 N., R. 4 W. brs. N. 40 $\frac{3}{4}$ ° E.

40.03 True point for the reestablishment of the $\frac{1}{4}$ sec. cor. of secs. 8 and 17 falls on edge of the left bank of the Hassayampa River, bearing NE.-SW., where it is impracticable to monument the cor., therefore establish witness cor. at 53 lks. N. 89° 38' E. as described above.

Desc. over NW. slope on left bank of river.

40.31 Enter level land on small bench in river bank.

41.06 Leave bench. Desc. 6 ft. over NW. slope to

41.56 Foot of river bank, brs. NE.-SW. Thence over level bottom of Hassayampa River.

42.50 Stream of water, 30 lks. wide, 6 ins. deep, course S. 80° W. Continue over level river bottom.

80.06 True point for reestablishment of the cor. of secs. 7, 8, 17 and 18 falls in river bed where it is impracticable to monument the cor., therefore establish witness cor. at a point 3.00 chs. South as follows:

Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for witness cor. to reestablished cor. of secs. 7, 8, 17 and 18, with brass cap mkd.

WC
T8N | RAW
S7 | S8
S18 | S17

1929

from which

a willow, 30 ins. in diam., brs. N. 73 $\frac{1}{4}$ ° E., 215 lks. dist., mkd. WC T8N RAW S17 BT

a mesquite, 8 ins. in diam., brs. S. 65 $\frac{1}{2}$ ° W., 55 lks. dist., mkd. WC T8N RAW S18 BT

No other bearing trees available.

Highest peak of Rich Hill brs. N. 4 $\frac{1}{2}$ ° W.

Land, rolling and level.

Soil, gravelly and rocky, 3rd and 4th rate.

Timber, paloverde, mesquite and cottonwood.

Undergrowth, cacti, catclaw, greasewood and arrowweed.

Resurvey of Part of the Subdivision Lines of Township 8 North, Range 4 West

chains From true point for reestablished cor. of secs. 7, 8, 17 and 18, S. 89° 38' W., on true line, bet. secs. 7 and 18 (E. $\frac{1}{2}$) Over level bottom of the Hassayampa River, thru scattering timber and undergrowth.


9.00 Hassayampa River, stream of water 30 lks. wide, 10 ins. deep, course NW. Continue over river bottom.

10.00 Leave level river bottom, and enter mountainous land. Asc. 154 ft. over rocky NE. slope.

24.00 Spur, brs. NW. Desc. 77 ft. over SW. slope.

28.00 Wash, 20 lks. wide, course N. Asc. 99 ft. over NE. slope to

40.03 Spur, brs. N. Intersect the original $\frac{1}{4}$ sec. cor. of secs. 7 and 18, which is a granite stone 12 x 8 x 6 ins. above ground, firmly set, mkd. $\frac{1}{4}$ on N. face, and witnessed by a mound of stone N. of cor. No bearing trees. Reconstruct this cor. monument as follows: alongside the old cor. stone, set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, and raise a mound of stone about post, for $\frac{1}{4}$ sec. cor. of secs. 7 and 18, with brass cap mkd.



1929

No bearing trees available.

Thence N. 85° 12' W., on true line, bet. secs. 7 and 18 (W. $\frac{1}{2}$) Over mountainous land, thru scattering timber and undergrowth.

Desc. 71 ft. over W. slope.

2.50 Wash, 10 lks. wide, course N. Asc. 114 ft. over NE. slope.

9.85 Spur, brs. N. Desc. 79 ft. over NW. slope.

20.05 Wash, 10 lks. wide, course N. Asc. 161 ft. over NE. slope.

31.52 Old telephone line, brs. N.-S.

38.90 Intersect the cor. of secs. 7, 12, 13 and 18 on the West bdy. of the Tp., hereinbefore described.

Land, mountainous.
Soil, rocky, 4th rate.
Timber, paloverde, ironwood and mesquite.
Undergrowth, cacti, catclaw and greasewood.

From true point for reestablished cor. of secs. 7, 8, 17 and 18, N. 0° 34' W., on true line, bet. secs. 7 and 8 (S. $\frac{1}{2}$) Over level bottom of the Hassayampa River, thru scattering timber and undergrowth.

5.00 Leave level river bottom and enter rolling land. Asc. 34 ft. over S. slope.

7.50 Point of spur, brs. SW. Desc. 34 ft. over NW. slope.

18.00 Wash, 50 lks. wide, course SW. Asc. 26 ft. over SE. slope.


22.00 Thence over E. slope.

24.95 Road, brs. E.-W. Wickenburg to Cameron Ranch.

40.00 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 7 and 8, which is a granite stone 12 x 8 x 4 ins. above ground, firmly set, mkd. $\frac{1}{4}$ on W. face, and witnessed by a mound of stone W. of cor. No bearing trees. Alongside the cor. stone is a wooden post 4 ins. square, projecting 3 ft. above ground and firmly set. Reconstruct this cor. monument as follows: alongside the old cor. stone and wood post, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 7 and 8, with brass cap mkd.

Resurvey of
Part of the Subdivision Lines of Township 8 North, Range 4 West

chains



1929

No bearing trees available.

Thence

N.0°15'W., on true line, bet. secs. 7 and 8 (N. $\frac{1}{2}$)


Over rolling land, thru scattering timber and undergrowth.

Desc. 11 ft. over NE. slope.

- 9.00 Center of wash, 100 lks. wide, course SE. Asc. gradually over S. slope.
- 17.00 Spur, brs. SW. Desc. gradually over NW. slope.
- 26.50 Wash, 10 lks. wide, course SW. Asc. 69 ft. over SE. slope to
- 39.80 Intersect the original cor. of secs. 5, 6, 7 and 8, which is a granite stone 12 x 10 x 5 ins. above ground, firmly set, mkd. with 5 notches on each of E. and S. faces, and witnessed by a mound of stone W. of cor. No bearing trees.

Reconstruct this cor. monument as follows:

alongside old cor. stone, set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 5, 6, 7 and 8, with brass cap mkd.



1929

No bearing trees available.

Land, rolling.

Soil, rocky, 4th rate.

Timber, paloverde, mesquite and ironwood.

Undergrowth, cacti, greasewood and catclaw.


From cor. of secs. 4, 5, 8 and 9,

S.89°18'W., on true line, bet. secs. 5 and 8.

Over rolling land, thru scattering timber and undergrowth.

Asc. slightly over NE. slope.

- 3.95 Thence over level land.
- 5.95 Wire fence, brs. NE.-SW.
- 9.90 Wash, 15 lks. wide, course SW.
- 19.90 Wash, 10 lks. wide, course S. Leave level and enter rolling land. Asc. 52 ft. over SE. slope.
- 35.14 Spur, brs. S. Desc. 91 ft. over W. slope.
- 37.96 E. edge of wash, brs. N.-S. Thence across wash, course S.
- 39.98 True point for reestablishment of the $\frac{1}{4}$ sec. cor. of secs. 5 and 8 falls in wash where it is impracticable to monument the cor. There being no suitable point on line, establish witness cor. at a point 2.55 chs. N.78°41'E. as follows:
set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for witness cor. to $\frac{1}{4}$ sec. cor. of secs. 5 and 8, with brass cap mkd.



WC

1929

No bearing trees available.

Continue across wash.

- 48.06 W. edge of wash, brs. N.-S. Leave wash, and enter rolling land, along S. slope.
- 64.16 Wash, 10 lks. wide, course S.
- 75.00 Wash, 10 lks. wide, course S. Asc. 39 ft. over SE. slope.

Resurvey of Part of the Subdivision Lines of Township 8 North, Range 4 West

chains
79.96

Intersect the reconstructed cor. of secs. 5, 6, 7 and 8.
Land, rolling and level.
Soil, rocky, 4th rate.
Timber, paloverde, mesquite and ironwood.
Undergrowth, greasewood, cacti and catclaw.

S. 88° 33' W., on true line, on N. bdy. of sec. 7 (E. $\frac{1}{4}$)
Over rolling land, thru scattering timber and undergrowth.
Asc. gradually over SE. slope.

1.30
9.90
14.00
18.40
25.00
33.00
35.50
36.80

Spur, brs. S. 20° W. Desc. 82 ft. over W. slope.
Wash, 50 lks. wide, course S. 10° E. Thence across bottom of draw. Asc. slightly to
Leave bottom of draw. Asc. 100 ft. over NE. slope.
Road, brs. N.-S. Wickenburg to Octave.
Center of flat top of ridge, brs. N.-S.
Desc. 85 ft. over W. slope.
Wash, 20 lks. wide, course SW. Asc. gradually over SE. slope.
Spur, brs. S. Desc. 16 ft. over W. slope.
Intersect the original $\frac{1}{4}$ sec. cor. of secs. 6 and 7, which is a granite stone 12 x 8 x 8 ins. above ground, firmly set, mkd. $\frac{1}{4}$ on N. face, and witnessed by a mound of stone N. of cor. No bearing trees.
Reconstruct this cor. monument and alter its reference as follows:
alongside old cor. stone, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 7 only, with brass cap mkd.

$\frac{1}{4}$ S 7

1929

from which

a black peak, brs. S. 45° W.
a black, jagged knoll, brs. S. 11 $\frac{1}{2}$ ° W.
No bearing trees available.

Thence
N. 84° 30' W., on true line, on N. bdy. of sec. 7 (W. $\frac{1}{2}$)
Over rolling land, thru scattering timber and undergrowth.
Desc. slightly over W. slope.

0.40
3.22

5.20
15.75
30.75
42.25

Wash, 10 lks. wide, course SW. Asc. gradually over SE. slope to
(40.00 chs. in W. departure from sec. cor.) Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, and raise a mound of stone about post, for reestablished $\frac{1}{4}$ sec. cor. of sec. 6 only, with brass cap mkd.

$\frac{1}{4}$ S 6

1929

No bearing trees available
Asc. slightly over SE. slope.
Spur, brs. S. Desc. gradually over W. slope.
Center of wash, 100 lks. wide, course S.
Asc. 159 ft. over SE. slope.
Ridge, brs. NE.-SW. Desc. 175 ft. over NW. slope to
Intersect the cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., hereinbefore described.
Land, rolling.
Soil, rocky, 4th rate.
Timber, paloverde, mesquite and ironwood.
Undergrowth, greasewood, catclaw and cacti.

Resurvey of
Part of the Subdivision Lines of Township 8 North, Range 4 West

chains	<p>From the cor. of secs. 5, 6, 7 and 8, N. $0^{\circ}28'$ W., on true line, bet. secs. 5 and 6 (S. $\frac{1}{4}$) Over rolling land, thru scattering timber and undergrowth. Asc. gradually over SE. slope.</p> <p>14.00 Spur, brs. SW. Desc. 17 ft. over NW. slope.</p> <p>25.00 Wash, 10 lks. wide, course SW. Asc. 46 ft. over SE. slope.</p> <p>29.00 Spur, brs. SE. Asc. gradually over E. slope.</p> <p>40.10 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 5 and 6, which is a granite stone 12 x 8 x 4 ins. above ground, mkd. $\frac{1}{4}$ on W. face, firmly set, and witnessed by a mound of stone W. of cor. No bearing trees. Reconstruct this cor. monument as follows: alongside old cor. stone, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 5 and 6, with brass cap mkd.</p> <div style="text-align: center;"> $\frac{1}{4}$ S6 S5 1929 </div> <p>No bearing trees available.</p> <p>Land, rolling. Soil, rocky, 4th rate. Timber, paloverde, ironwood and mesquite. Undergrowth, greasewood, catclaw and cacti.</p>
--------	--

Survey of Part (Completion) of
South Boundary of Township 8 North, Range 4 West

BOOK 3892

chains

From reestablished cor. of secs. 3, 4, 33 and 34, on S. bdy. of T. 8 N., R. 4 W., hereinbefore described, East, on true line, bet. secs. 3 and 34. Over rolling land, thru scattering timber and undergrowth. Asc. gradually over NW. slope.


6.50 Spur, brs. SW. Thence across flat top of same.

20.00 Leave top of spur and desc. 16 ft. over SE. slope.

22.20 Wash, 40 lks. wide, course SW. Asc. 12 ft. over NW. slope.

26.40 Spur, brs. SW. Desc. gradually over SE. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, and raise a mound of stone about post, for $\frac{1}{4}$ sec. cor. of secs. 3 and 34, with brass cap mkd.



from which

a paloverde, 6 ins. in diam., brs. N. 39° W., 34 lks. dist., mkd. $\frac{1}{4}$ S34 BT

a paloverde, 6 ins. in diam., brs. S. 31° W., 159 lks. dist., mkd. $\frac{1}{4}$ S3 BT

Desc. gradually over SE. slope.

42.50 Small ravine, course SW. Asc. gradually over W. slope.

43.70 Spur, brs. SW. Desc. 29 ft. over SE. slope.

53.50 Wash, 30 lks. wide, course SW. Asc. 82 ft. over NW. slope.

62.80 Spur, brs. SW. Desc. 38 ft. over SE. slope.


66.40 Wash, 20 lks. wide, course SW. Asc. 29 ft. over NW. slope.

69.00 Spur, brs. S. Desc. 26 ft. over SE. slope.

74.50 Wash, 10 lks. wide, course SW. Asc. 16 ft. over W. slope.

77.50 Wash, 10 lks. wide, course SW. Asc. 16 ft. over W. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 2, 3, 34 and 35, with brass cap mkd.



No bearing trees available.

Land, rolling.
Soil, rocky, 4th rate.
Timber, paloverde, ironwood and mesquite.
Undergrowth, cacti, greasewood and catclaw.

East, on true line, bet. secs. 2 and 35. Over rolling land, thru scattering timber and undergrowth. Asc. 67 ft. over W. slope.

3.20 Spur, brs. SW. Desc. gradually over SE. slope.

12.90 Wash, 20 lks. wide, course SW. Asc. gradually over N. slope.

14.70 Foot of spur from S. Desc. gradually over NE. slope.

16.70 Same wash, course NW.

18.40 Same wash, course SW. Asc. 129 ft. over NW. slope.

Survey of Part (Completion) of
South Boundary of Township 8 North, Range 4 West

chains

- 26.50 Spur, brs. SW. Asc. over S. and SW. slopes to
34.40 Spur, brs. S. Desc. 71 ft. over E. slope to
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in
the ground to bedrock, deposit a stone marked with a
cross (X) at base of post, and raise a mound of stone
about post, for $\frac{1}{4}$ sec. cor. of secs. 2 and 35, with
brass cap mkd.

$$\frac{1}{4} \frac{S\ 35}{S\ 2}$$

1929

No bearing trees available

- 59.00 Desc. gradually over SE. slope.
Wash, 40 lks. wide, course SW.
Asc. gradually over SW. slope.
64.30 Old Phoenix highway, brs. NW.-SE.
75.00 Center of wash, 100 lks. wide, course SW.
Asc. 35 ft. over NW. slope to
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins.
in the ground to bedrock, and raise a mound of stone
about post, for cor. of secs. 1, 2, 35 and 36, with
brass cap mkd.

T8N	R4W
S35	S36
S2	S1
T7N	

1929

from which

- a mesquite, 6 ins. in diam., brs. N. $24\frac{1}{2}^{\circ}$ W., 240 lks.
dist., mkd. T8N R4W S35 BT
a paloverde, 6 ins. in diam., brs. S. 22° E., 80 lks.
dist., mkd. T7N R4W S1 BT
a paloverde, 6 ins. in diam., brs. S. $29\frac{1}{2}^{\circ}$ W., 68 lks.
dist., mkd. T7N R4W S2 BT
a paloverde, 6 ins. in diam., brs. N. $18\frac{1}{4}^{\circ}$ E., 120 lks.
dist., mkd. T8N R4W S36 BT
U.S.L.M. No. 4015 brs. N. $12^{\circ}35'$ W.

Land, rolling.

Soil, rocky, 4th rate.

Timber, paloverde, mesquite and ironwood.

Undergrowth, cacti, catclaw and greasewood.

- East, on true line, bet. secs. 1 and 36.
Over rolling land, thru scattering timber and undergrowth.
Asc. 10 ft. over NW. slope.
- 1.20 Spur, brs. SW. Desc. 21 ft. over SE. slope.
8.20 Wash, 20 lks. wide, course SW.
Asc. 86 ft. over W. slope.
21.80 Spur, brs. SW. Desc. 70 ft. over SE. slope.
30.00 Wash, 10 lks. wide, course S.
Asc. 21 ft. over W. slope.
38.60 Spur, brs. S. Desc. 25 ft. over E. slope to
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins.
in the ground, for $\frac{1}{4}$ sec. cor. of secs. 1 and 36, with
brass cap mkd.

Survey of Part (Completion) of
South Boundary of Township 8 North, Range 4 West

BOOK 3882

chains

S 36
1/4 ———
S 1

1929

from which

- a paloverde, 10 ins.in diam., brs. N.60 $\frac{1}{2}$ °W., 12 lks.
dist., mkd. 1/4 S36 BT
- a paloverde, 6 ins. in diam., brs. S.67 $\frac{1}{4}$ °W., 16 lks.
dist., mkd. 1/4 S1 BT

- 40.90 Desc. 17 ft. over SE. slope.
- 54.35 Wash, 20 lks.wide, course SW.
- 60.00 Center of wash, 100 lks.wide, course SW.
- 60.00 Road, brs. NW.-SE.
- 62.90 Same road, brs. NE.-SW., in small ravine, course SW.
- 69.30 Spur, brs. SW. Desc. 43 ft. over SE. slope.
- 74.50 Same road, brs. NW.-SE.
- 74.60 Wash, 10 lks.wide, course SE.
- 77.40 Wash, 10 lks.wide, course SW.
Ascend gradually over W. slope.
- 79.60 Spur, brs. SW. Desc. slightly over SE. slope to
- 80.00 Set an iron post, 3 ft. long, 3 ins. in diam., 26 ins. in
the ground, for cor. of Ts. 7 and 8 N., R. 4 W. only,
with brass cap mkd.


T8N	T8N
R4W	R3W
S36	S31
S1	
T7N	

1929

from which

- a paloverde, 5 ins. in diam., brs. S.54°W., 47 lks.
dist., mkd. T7N R4W S1 BT
- a paloverde, 8 ins. in diam., brs. N.88 $\frac{1}{2}$ °W., 63 lks.
dist., mkd. T8N R4W S36 BT

Land, rolling and mountainous.
Soil, rocky, 4th rate.
Timber, paloverde, ironwood and mesquite.
Undergrowth, greasewood, catclaw and cacti.



--	--	--	--

Survey of
The East Bdy. of Township 8 North, Range 4 West.

Chains									
	From the cor. of Ts. 7 and 8 North, Range 4 West. North, on true line, on E. bdy. of sec. 36. Over mountainous land, thru scattering timber and undergrowth.								
	Asc. gradual SE slope.								
.50	Spur, brs. SW. Desc. 10 ft. over NW slope.								
1.60	Wash, 10 lks. wide, course SW.								
	Asc. 103 ft. over SE slope.								
13.40	Spur, brs. SW. Desc. 56 ft. over NW slope.								
17.60	Wash, 20 lks. wide, course NW. Asc. 38 ft. over SW slope.								
22.50	Spur, brs. SW. Desc. 25 ft. over NW slope.								
24.70	Mine tunnel, brs. E. about 250 lks. dist.								
32.90	Wash, 150 lks. wide, course SW. Asc. 30 ft. over SE slope.								
34.50	Road, brs. E-W.								
38.70	Spur, brs. SW. Desc. 17 ft. over N. slope.								
40.00	Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post for the $\frac{1}{4}$ sec. cor. secs. 36 only, with brass cap mkd.								
	$\frac{1}{4}$ S36								
	1929 from which, a palo verde, 6 ins. in diam., brs. S. 38 $\frac{1}{2}$ ° W., 20 lks. dist., mkd. $\frac{1}{4}$ S36 BT No other bearing tree available.								
	Asc. gradual SE slope.								
43.00	Spur, brs. SW. Desc. 14 ft. over NW slope.								
45.90	Wash, 20 lks. wide, course SW.								
	Asc. 57 ft. over SE slope.								
62.90	Spur, brs. SW. Desc. 43 ft. over N. slope.								
66.40	Wash, 1 ch. wide, course SW.								
	Asc. 21 ft. over SE slope.								
69.40	Old road, brs. E-W.								
80.00	Set an iron post 3 ft. long, 2 ins. in diam., 10 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post for the cor. secs. 25 and 36 only, with brass cap mkd.								
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>T8N</td> <td>T8N</td> </tr> <tr> <td>S25</td> <td>R3W</td> </tr> <tr> <td>S36</td> <td>S30</td> </tr> <tr> <td>R4W</td> <td></td> </tr> </table>	T8N	T8N	S25	R3W	S36	S30	R4W	
T8N	T8N								
S25	R3W								
S36	S30								
R4W									
	1929 No bearing trees available. Land, mountainous. Soil, rocky 4th. rate. Timber, paloverde, mesquite and ironwood. Undergrowth, cacti, catclaw and greasewood.								

	North, on true line, on E. bdy. secs. 25. Over mountainous land, thru scattering timber and undergrowth.								
	Asc. gradual SE slope.								
1.00	Spur, brs. SW. Desc. 7 ft. over N. slope.								
2.30	Small ravine course SW. Asc. 87 ft. over rolling SW slope.								
13.79	Short spur, brs. SW. Desc. 28 ft. over NW slope.								
15.65	Wash, 10 lks. wide, course SW. Asc. 82 ft. over SE slope.								

Survey of

The East Bdy. of Township 8 North Range 4 West.

Chains

21.70 Spur, brs. SE. Desc. gradual NE slope.
 29.50 Wash, 10 lks. wide, course SE. Asc. 143 ft. over SE slope
 39.70 Spur, brs. SW. Desc. gradual NW slope, to
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 14 ins. in the
 ground to bedrock, deposit a stone mkd. with a cross
 (X) at base of post, raise a md. of stone 4 ft. base,
 2 ft. high about post for the 1/4 sec. cor. sec. 25 only,
 with brass cap mkd.

1/4 S25

1929

No bearing trees available.

Desc. 121 ft. over N. slope to wash.
 52.50 Wash, 20 lks. wide, course W. Asc. 231 ft. over SW slope.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 14 ins. in
 the ground to bedrock, deposit a stone mkd. with a
 cross (X) at base of post, raise a md. of stone about
 post for the cor. secs. 24 and 25 only, with brass
 cap mkd.

T8N
S24

S25
R4W

T8N
R3W
S19

1929

No bearing trees available.

Cor. falls on W. end of high spur, from E.
 Land, mountainous. Soil, rocky 4th. rate. Timber, palo-
 verde, ironwood and mesquite. Undergrowth, cacti,
 catclaw and cacti.

North, on true line, on E. Bdy. sec. 24.
 Over mountainous land, thru scattering timber and under-
 growth.

Asc. gradual SW slope.
 8.00 Spur, turns to NE. Desc. 145 ft. over W. slope.
 36.60 Ridge, brs. NW. Desc. 55 ft. over NE slope.
 39.60 Small ravine, course NE. Asc. gradual NE slope.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 10 ins. in
 the ground to bedrock, deposit a stone mkd. with a
 cross (X) at base of post, raise a md. of stone about
 post for the 1/4 sec. cor. sec. 24 only, with brass cap
 mkd.

1/4 S24

1929

No bearing trees available.

Asc. 33 ft. over SE slope.
 42.40 Short spur, brs. E. Desc. 34 ft. along NE slope.
 48.00 Same ridge, from SW: Desc. gradually down same.
 57.20 Leave ridge, which turns to NW. Desc. 127 ft. over NE slope.
 62.00 Cross top of ridge, brs. E. and W.
 Desc. 171 ft. over NW slope.
 74.90 Center of Blue Tank Wash, 1 chs wide, course West.
 Asc. 30 ft. over S. slope to

The East Bdy. of Township 8 North, Range 4 West.

Chains

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post, for the cor. secs. 13 and 24 only, with brass cap mkd.

T8N	T8N
S13	R3W
S24	S18
R4W	

1929

No bearing trees available.

Land, mountainous.
 Soil, rocky 4th. rate.
 Timber, paloverde, ironwood and mesquite.
 Undergrowth, cacti, greasewood and catclaw.

North, on true line, base E. Bdy. of sec. 13.
 Over mountainous land, thru scattering timber and undergrowth.

Asc. 50 ft. over rocky SW slope.
 6.20 Spur, brs. SW. Desc. 43 ft. over NW slope.
 13.65 Wash, 20 lks. wide, course SW. Asc. 79 ft. over SW slope.
 22.50 Spur, brs. SW. Desc. 140 ft. over NW slope.
 33.10 Wash, 10 lks. wide, course SW. Asc. gradual S. slope.
 36.50 Ridge, brs. W. Desc. 30 ft. over NE slope.
 36.80 Telephone line, brs. NE-SW.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 24 ins. in the ground, raise a md. of stone about post, for the 1/4 sec. cor. sec. 13 only, with brass cap mkd.

1/4 S13

1929

No bearing trees available.
 Raise a md. of stone 4 ft. base, 2 ft. high W. of cor. 3 ft. dist.

Desc. 62 ft. over NE slope.
 46.55 Reckyn wash, 20 lks. wide, course NW. Asc. gradual SW slope.
 50.00 Spur, brs. NW. Desc. 28 ft. over NW slope.
 57.60 Hamlin Wash, 20 lks. wide, course W. Asc. 34 ft. over S. slope.
 63.80 Graded road, brs. NE-SW. On spur, brs. SW. Desc. gradual NW slope.
 73.00 Wash, 10 lks. wide, course SW. Asc. 100 ft. over S. slope.
 79.50 Spur, brs. W. Desc. gradual N. slope to
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in the ground for the cor. secs. 12 and 13 only, with brass cap mkd.

T8N	T8N
S12	R3W
S13	S7
R4W	

1929

No bearing trees available; raise a md. of stone 4 ft. base, 2 ft. high W. of cor.

Land, mountainous.
 Soil, rocky 4th. rate.
 Timber, paloverde, ironwood and mesquite.
 Undergrowth, cacti, catclaw and greasewood.

Survey of

The East Bdy. of Township 8 North Range 4 West

Chains

North, on true line, on E. Bdy. of sec. 12.
Over mountainous land, thru scattering timber and under-
growth.

25.00 Desc. 254 ft. over rough NW slope.
Center of King Solomon wash, 150 lks. wide, course SW.
35.70 Asc. 200 ft. over rough S. slope to cor.
Rocky knoll; ascent becomes more gradual.
40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
the ground for the 1/4 sec. cor. sec. 12 only, with brass
cap mkd.

1/4 S12

1929

No bearing trees available; raise a md. of stone 4 ft.
base, 2 ft. high W. of cor. 3 ft. distant.
48.30 Asc. gradual S. slope.
Narrow ridge, brs. NW-SE. Road on same.
63.70 Desc. 143 ft. over rolling NE slope.
Wash, 10 lks. wide, course NE.
Asc. 73 ft. over SE slope.
66.80 Spur, brs. SE. Desc. 106 ft. over N. slope to
79.40 Small spur, brs. NE. Desc. gradually over NW slope to
80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in
the ground for the cor. secs. 1 and 12 only, with brass
cap mkd.

T8N | T8N
S1 | R3W
S12 | S6
R4W

1929

No bearing trees available; raise a md. of stone
4 ft. base, 2 ft. high W. of cor. 3 ft. distant.
Land, mountainous.
Soil, rocky 4th. rate.
Timber, paloverde, mesquite and ironwood.
Undergrowth, cacti, catclaw and greasewood.

North, on true line, on E. Bdy. of sec. 1.
Over mountainous land, thru scattering timber and under-
growth.

1.05 Desc. 20 ft. over NW slope.
12.30 Wash, 10 lks. wide, course NE. Asc. 76 ft. over SE slope.
19.60 Spur, brs. NE. Desc. 236 ft. over rough, broken NW slope.
22.90 Road on dugway, brs. NE-SW.
24.25 Wash, 20 lks. wide, course NE. Asc. 20 ft. over SE slope.
25.40 Short spur, brs. E. Desc. 28 ft. over N. slope.
30.00 Wash, 10 lks. wide, course E. Asc. 112 ft. over S. slope.
Top of rocky knoll, about 2 chs. in diam., Desc. 232 ft.
over N. slope to 1/4 sec. cor. sec. 1.
35.92 Intersect the SW side line (3-4) of the "New York" pat.
lode mining claim, Min. Sur. No. 2519, at 8.74 chs.
N. 57° 50' W., of cor. No. 3, thereof. Across patented
mineral land.
40.00 Set an iron post 3 ft. long, 1 in. in diam., 16 ins. in
the ground to bedrock, deposit a stone mkd. with a
cross (X) at base of post, raise a md. of stone
about post, for the 1/4 sec. cor. sec. 1 only, with
brass cap mkd.

1/4 S1

1929 No bearing trees available.


Survey of

The East Bdy. of Township 8 North, Range 4 West.

Chains

46.57
49.60
53.00
58.05
59.20
68.55
70.83

Desc. 95 ft. over N. slope to wash.
 Intersect the NE side line, (1-2) of the "New York" pat.
 lode mining claim, Min. Sur. No. 2719, at 5.06 chs.
 S. 57° 50' E., of Cor. No. 1 thereof.
 Leave patented mineral land.
 Center of wash, 70 lks. wide, course NW.
 Road, brs. NW-SE. Asc. 185 ft. over S. slope.
 Spur, brs. SW. Desc. 34 ft. over NW slope.
 Power line, brs. NW-SE.
 Wash, 10 lks. wide, course SW. Asc. 178 ft. over SE slope.
 Ridge, brs. NW-SE. Desc. 30 ft. over NE slope to
 Intersect the 2nd. St. Par. N. at 27.15 chs. East, of the
 reestablished Std. cor. of Ts. 9 N., Rs. 3 and 4 W.,
 hereinbefore described.
 At point of intersection set an iron post 3 ft. long,
 3 ins. in diam., 26 ins. in the ground for the closing
 cor. of Ts. 8 N., Rs. 3 and 4 W., with brass cap mkd.



No bearing trees available, raise a md. of stone
 4 ft. base, 2 ft. high S. of cor.

Land, mountainous.
 Soil, rocky 4th. rate.
 Timber, paloverde, ~~ash~~wood and mesquite.
 Undergrowth, cacti, catclaw and greasewood.

Boundaries of Township 8 North, Range 4 West
 Latitudes, Departures and Closing Errors.

Lines designated	True Course	Dist.	Latitudes		Departures	
			N.	S.	E.	W.
South boundary	West	480.00				480.00
West boundary	N. 0° 5' E.	320.00	320.00		0.46	
	N. 0° 27' W.	40.13	40.13			.31
	N. 0° 11' E.	40.09	40.09		0.13	
	North	71.04	71.04			
North boundary (2nd St. Par. N.)	East	479.41			479.41	
East boundary	South	470.83		470.83		
Convergency					0.49	
Totals			471.26	470.83	480.49	480.31
			470.83		480.31	
	Error in latitude		0.43			
	Error in departure				0.18	

Survey of

Part of the Subdivision Lines of T. 8 N., R. 4 W.

Chains							
	From cor. secs. 1, 2, 35 and 36, on S. Bdy. of Tp., here- inbefore described.						
	N. 0° 01' W., on true line, bet. secs. 35 and 36.						
	Over rolling land, thru scattering timber and undergrowth.						
	Desc. gradual NW slope.						
10.10	Wash, 10 lks. wide, course SW. Asc. 29 ft. over SE slope.						
17.30	Spur, brs. SW. Desc. 23 ft. over N. slope.						
19.00	Center of wash, 60 lks. wide, course SW.						
	Asc. 34 ft. over SE slope.						
29.00	Spur, brs. SW.						
31.00	Road, brs. E-W.						
40.00	Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the 1/4 sec. cor. secs. 35 and 36, with brass cap mkd.						
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr><td>S35</td><td>S36</td></tr> </table>	S35	S36				
S35	S36						
	1929						
	No bearing trees available, raise a md. of stone 4 ft. base, 2 ft. high W. of cor.						
	From cor. S. 62° 35' E., 22.16 chs. to cors. Nos. 1-4 of the Prosperity Nos. 4-1 patented mining claims Min. Sur. No. 4015.						
42.50	Desc. gradual NE slope.						
	Small ravine, course SE. Asc. 63 ft. over rolling SE slope.						
74.50	Wash, 10 lks. wide, course SE. Asc. 109 ft. over S. slope.						
80.00	Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock; deposit a stone mkd. with a cross (X) at base of post; raise a md. of stone about post for the cor. secs. 25, 26, 35 and 36, with brass cap mkd.						
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr><td>T8N</td><td>R4W</td></tr> <tr><td>S26</td><td>S25</td></tr> <tr><td>S35</td><td>S36</td></tr> </table>	T8N	R4W	S26	S25	S35	S36
T8N	R4W						
S26	S25						
S35	S36						
	1929						
	No bearing trees available.						
	Land, mountainous.						
	Soil, rocky 4th. rate.						
	Timber, palo verde, ironwood and mesquite.						
	Undergrowth, greasewood, catclaw and cacti.						
40.00	East, on random line, bet. secs. 25 and 36.						
	Set temp. 1/4 sec. cor.						
80.06	Fall 9 lks. S. of the cor. secs. 25, and 36 on E. Bdy. of Tp., hereinbefore described.						
	Thence, S. 89° 56' W., on true line, bet. secs. 25 and 36.						
	Over mountainous land, thru scattering timber and under- growth.						
	Asc. gradual E. slope.						
1.10	Spur, brs. SW. Desc. 60 ft. over W. slope.						
3.00	Wash, 10 lks. wide, course SW. Asc. 39 ft. over SE slope.						
8.30	Spur, brs. SW. Desc. 81 ft. over NW slope.						
16.23	Wash, 30 lks. wide, course S. Asc. 66 ft. over SE slope.						
29.20	Spur, brs. S. Desc. 91 ft. over W. slope.						
33.80	Wash, 20 lks. wide, course S. Asc. 23 ft. over E. slope.						

Survey of

BOOK 3892

Part of the Subdivision Lines of T. 8 N. R. 4 W.

Chains	
37.30 40.03	Spur, brs. S. Desc. 21 ft. over SW slope. Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. secs. 25 and 36, with brass cap mkd.
	$\frac{1}{4}$ $\frac{S\ 25}{S\ 36}$
	1929
	No bearing trees available. Raise a md. of stone 4 ft. base, 2 ft. high N. of cor.
	Asc. gradually over SE slope.
49.00	Spur, brs. S. Desc. 62 ft. over NW slope.
52.30	Head of wash, course NW. Desc. 78 ft. along N. slope.
66.10	Wash, 20 lks. wide, course SW. Asc. gradual S. slope.
68.40	Spur, brs. S. Desc. 14 ft. over SW slope.
71.90	Wash, 10 lks. wide, course SE. Asc. 132 ft. over W. slope.
77.70	Spur, brs. S. Desc. 21 ft. over SW slope to
80.06	Intersect the cor. secs. 25, 26, 35 and 36.
	Land, mountainous. Soil, rocky 4th. rate. Timber, paloverde, ironwood and mesquite. Undergrowth, cacti, catclaw and greasewood.
	N.0°01'W., on true line, bet. secs. 25 and 26. Over mountainous land, thru scattering timber and undergrowth.
	Asc. 12 ft. over SW slope.
1.20	Spur, brs. East. Desc. 103 ft. over N. slope.
7.60	Small ravine, course W. Asc. 17 ft. along rolling W. slope.
10.00	Desc. 67 ft. over NW slope.
18.90	Wash; 20 lks. wide, course SW. Asc. 53 ft. over W. slope.
21.20	Spur, brs. SW. Desc. 50 ft. over N. slope.
26.20	Spur, brs. W. Desc. 50 ft. over N. slope.
31.45	Wash. 20 lks. wide, course W. Asc. 44 ft. over SW slope.
36.20	Small spur, brs. SW. Desc. 32 ft. over NW slope, to
40.00	Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. secs. 25 and 26, with brass cap mkd.
	$\frac{1}{4}$ S25 S26
	1929
	No bearing trees available. Raise a md. of stone 3 ft. base, 2 ft. high W. of cor.
	Leave mountainous & enter rolling land.
	Desc. 41 ft. over NW slope.
56.80	Wash, 30 lks. wide, course SW.
61.00	Center of wash, 60 lks. wide, course SW.
80.00	Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in the ground for the cor. secs. 23, 24, 25 and 26, with brass cap mkd.

Survey of

Part of the Subdivision Lines of T. 8 N. R. 4 W.

Chains

T8N	R4W
S23	S24
S26	S25

1929 from which,
 a palo verde, 8 ins. in diam., brs. N.76 $\frac{1}{2}$ °W., 63 lks.
 dist., mkd. T8N R4W S23 BT
 a mesquite, 6 ins. in diam., brs. S.21°W., 38 lks.
 dist., mkd. T8N R4W S26 BT

Land, mountainous and rolling. Soil, rocky 4th. rate.
 Timber, paloverde, ironwood and mesquite.
 Undergrowth, cacti, catclaw and greasewood.

40.00 N.89°56'E., on random line, bet. secs. 24 and 25.
 79.86 Set temp. $\frac{1}{4}$ sec. cor.
 Fall 3 lks. N. of the cor. of secs. 24 and 25, on E. Bdy.
 of Tp., hereinbefore described.
 Thence,
 S.89°57'W., on true line, bet. secs. 24 and 25.
 Over mountainous land, thru scattering timber and under-
 growth.
 17.70 Desc. 258 ft. over W. slope.
 Foot of steep descent, brs. N-S. Continue on more gradual
 desc. of 25 ft. over SW slope to
 39.93 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for the $\frac{1}{4}$ sec. cor. secs. 24 and 25, with
 brass cap mkd.

$\frac{1}{4}$ S 24
S 25

1929 from which,
 a paloverde, 6 ins. in diam., brs. N.52 $\frac{1}{2}$ °W., 83 lks.
 dist., mkd. $\frac{1}{4}$ S24 BT
 a mesquite, 6 ins. in diam., brs. S.80°W., 41 lks.
 dist., mkd. $\frac{1}{4}$ S25 BT

40.30 Continue over rolling land.
 60.26 Low spur, brs. SW.
 66.30 Wash, 20 lks. wide, course S.
 68.10 End of spur, brs. NW-SW.
 79.86 Wash, 40 lks. wide, course SW.
 Intersect the cor. secs. 23, 24, 25 and 26.

Land, rolling and mountainous.
 Soil, rocky 4th. rate.
 Timber, paloverde, ironwood and mesquite.
 Undergrowth, cacti, catclaw and greasewood.


9.30 N.0°01'W., on true line, bet. secs. 23 and 24.
 19.00 Over rolling land, thru scattering timber and undergrowth.
 27.20 Shallow wash, course SE.
 32.30 Same wash, course SW. Asc. gradual SE slope.
 36.80 Small house, brs. N.12 $\frac{1}{2}$ °E., about 5 chs. dist.
 40.00 Old road, brs. NE-SW.
 Used road, brs. E-W.
 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for the $\frac{1}{4}$ sec. cor. secs. 23 and 24, with
 brass cap mkd.

Survey of

Part of the Subdivision lines of T.8 N., R.4 W.

BOOK 3892


Chains



1929

No bearing trees available.
Raise a md. of stone 3 ft. base, 2 ft. high W. of cor.

- 41.00 Low ridge, brs. NE-SW. Desc. gradual NW slope.
- 54.70 Wash, 30 lks. wide, course W. Asc. 23 ft. over S. slope.
- 57.30 Telephone line, brs. NE-SW.
- 58.50 Spur, brs. W. Desc. gradual N. slope.
- 61.45 Wash, 10 lks. wide, course W. Asc. gradual SW slope.
- 73.00 Spur, brs. W. Desc. gradual N. slope to
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 26mins. in the ground for the cor. secs. 13, 14, 23 and 24, with brass cap mkd.




1929

No bearing trees available; raise a md. of stone 4 ft. base, 2 ft. high W. of cor.

Land, rolling.
Soil, rocky 4th. rate.
Timber, paloverde, ironwood and mesquite.
Undergrowth, cacti, catclaw and greasewood.

- 40.03 N. 89° 57' E., on random line, bet. secs. 13 and 24.
- 80.06 Set temp. 1/4 sec. cor.
- 80.06 Fall 7 lks. N. of the cor. secs. 13 and 24, on E. Bdy. of Tp., hereinbefore described.
- Thence,
- West 89° 57' on true line, bet. secs. 13 and 24.
- Over rolling land, thru scattering timber and undergrowth.
- Desc. 69 ft. over W. slope.
- 10.20 Wash, 20 lks. wide, course S. Asc. 51 ft. over SE slope.
- 19.60 Spur, brs. S. Desc. 55 ft. over W. slope.
- 26.26 Blue Tank Wash, 30 lks. wide, course NW.
- Asc. 20 ft. over NE slope.
- 28.90 Over rolling land; wire fence, brs. N-S. (Goat corral).
- 34.30 Wire fence, brs. N-S. Leave corral.
- 36.00 Road, brs. NW-SE.
- 40.03 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for the 1/4 sec. cor. secs. 13 and 24, with brass cap mkd.



1929

No bearing trees available.
Raise a md. of stone 4 ft. base, 2 ft. high N. of cor.
Barn of J. Goodwin, brs. S. 74° E., about 11 chs. dist.

- From barn, house brs. SW about 3 chs. dist.
- Desc. gradual NW slope.
- 40.55 Road, brs. NE-SW.
- 42.10 Road, brs. NW-SE.
- 44.60 Wash, 10 lks. wide, course N. Asc. 38 ft. over NE slope.
- 51.26 Telephone line, brs. NE-SW.

Survey of

Part of the Subdivision lines of T.8 N., R.4 W.

Chains


52.40 Ridge, brs. NW-SE. Desc. 48 ft. over W. slope.
 66.15 Old road, brs. N-S.
 80.06 Intersect the cor. secs. 13, 14, 23 and 24.

Land, rolling.
 Soil, rocky 4th. rate.
 Timber, paloverde, ironwood and mesquite.
 Undergrowth, cacti, catclaw and greasewood.

N.0°01'W., on true line, bet. secs. 13 and 14.
 Over rolling land, thru scattering timber and undergrowth.
 Desc. gradual S. slope.
 1.50 Graded road, brs. N.30°E.-S.30°W. Asc. 116 ft. over
 steeper slope. Enter mountainous land.
 13.20 Ridge, brs. E-W. Desc. 40 ft. over NW slope.
 17.80 Wash, 10 lks. wide, course NW.
 Asc. 73 ft. over SW slope.
 21.80 Spur, brs. W. Desc. 20 ft. over N. slope.
 28.10 Center of Blue Tank Wash, 50 lks. wide, course S.70°W.
 Asc. 74 ft. over S. slope, over large boulders.
 39.00 Spur, brs. W. Desc. 20 ft. over N. slope.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 12 ins. in
 the ground to bedrock, deposit a stone mkd. with a
 cross (X) at base of post, raise a md. of stone about
 post for the 1/4 sec. cor. secs. 13 and 14, with brass
 cap mkd.



No bearing trees available.
 41.50 Wash, course S.85°W. Asc. 155 ft. over SE slope.
 51.00 Spur, brs. E. Desc. 14 ft. over NE slope.
 53.00 Wash, 10 lks. wide, course SW (hd. 5 chs. NE).
 Asc. 202 ft. over SE slope.
 58.40 Main ridge, brs. E-W. Goodwin's house, brs. S.38°E.
 Desc. 496 ft. over NE slope to cor.
 63.00 Head of wash, course NE.
 68.40 Same wash, course N. Down same.
 74.40 Lv. wash to NW.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in
 the ground for the cor. secs. 11, 12, 13 and 14, with
 brass cap mkd.



1929
 No bearing trees available.
 Raise a md. of stone 4 ft. base, 2 ft. high W. of cor.
 3 ft. distant.
 Land, rolling and mountainous.
 Soil, rocky 4th. rate.
 Timber, paloverde, ironwood and mesquite.
 Undergrowth, cacti, catclaw and greasewood.

Survey of

BOOK 3892

Part of the Subdivision Lines of T. 8 N., R. 4 W.

Chains

East, on random line, bet. secs. 12 and 13.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.08 Fall 5 lks. N. of the cor. secs. 12 and 13 on E. Bdy. of Tp.,
hereinbefore described.

Thence,
N. $89^{\circ}58'W.$, on true line, bet. secs. 12 and 13.
Asc. 19 ft. over NE slope.

1.50 Spur, brs. N. $70^{\circ}W.$, desc. 295 ft. over SW slope.


23.00 Center of Hamlin Wash, 50 lks. wide, course N. $20^{\circ}W.$
Asc. 51 ft. over NE slope.

24.50 Rocky spur, brs. N. Desc. 54 ft. over W. slope.

25.90 Wash, 10 lks. wide, course NE. Asc. 265 ft. over SE slope.

38.50 Narrow, level topped spur, brs. N. (Butte about 1 ch. in
dism., brs. N. about 50 lks. dist.).
Desc. 15 ft. over W. slope to

40.04 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the
ground for the $\frac{1}{4}$ sec. cor. secs. 12 and 13, with brass
cap mkd.



1929.

No bearing trees available; raise a md. of stone 4 ft. base, 2 ft. high N. of cor.

Wash heads, course NW.
Desc. 194 ft. over W. slope.

57.25 Wash, 20 lks. wide, course N. Asc. 85 ft. over NE slope.

61.50 Spur, brs. N. Asc. 24 ft. over NE slope.

67.50 Spur, brs. NW. Desc. 102 ft. over SW slope to cor.

74.20 Shallow wash, course NW.
Asc. gradual NE slope.

77.50 Spur, brs. N. Desc. 28 ft. over W. slope to

80.08 Intersect the cor. secs. 11, 12, 13 and 14.

Land, mountainous.
Soil, rocky 4th. rate.
Timber, paloverde, ironwood and mesquite.
Undergrowth, cacti, catclaw and greasewood.

N. $0^{\circ}01'W.$, on true line, bet. secs. 11 and 12.
Over mountainous land, thru scattering timber and under-
growth.
Asc. slight SW slope.

3.10 Low spur, brs. NW. Desc. 81 ft. over N. slope.


11.80 Wash, 30 lks. wide, course W. Asc. 71 ft. over S. slope.

19.20 Spur, brs. NW. Desc. 83 ft. over NE slope.

28.60 Wash, 15 lks. wide, course NW. Asc. 9 ft. over SW slope.

30.10 Spur, brs. NW. Desc. 126 ft. over broken N. slope.

40.00 Set an iron post 3 ft. long, 1 in. in diam., in crack
bet. two sections of black outcropping ledge, 24 ins.,
chisel cross (X) alongside of post on ledge, chisel
cross on face of granite boulder 10 x 6 x 4 ft., 2 ft.
dist. North of cor. post, for the $\frac{1}{4}$ sec. cor. secs.
11 and 12, with brass cap mkd.



1929


No bearing trees available.

Survey of

Part of the Subdivision Lines of T. 8 N., R. 4 W.

Chains

43.30 Desc. 52 ft. over broken NW slope.
 45.60 Enter King Solomon wash, brs. NE-SW.
 47.50 Center of wash, course SW.
 56.70 Leave wash, asc. 207 ft. over SE slope, very broken.
 77.80 Spur, brs. SW. Desc. 95 ft. over NW slope.
 78.90 Wash, 20 lks. wide, course SW. Asc. 15 ft. over S. slope.
 79.10 Spur, brs. E. Desc. gradually over NE slope.
 80.00 Same wash, 20 lks. wide, course SE.
 Asc. gradually over SW slope to



1929

No bearing trees available.
 Land, mountainous.
 Soil, rocky 4th. rate.
 Timber, paloverde, ironwood and mesquite.
 Undergrowth, cacti, catclaw and greasewood.

40.00 S. 89° 58' E. on random line, bet. secs. 1 and 12.
 80.08 Set temp. 1/4 sec. cor. Fall 7 lks. N. of cor. secs. 1 and 12 on E. Bdy. of Tp.,
 hereinbefore described.
 Thence, N. 89° 55' W. on true line, bet. secs. 1 and 12.
 Over mountainous land, thru scattering timber & under-
 growth. Desc. gradual NW slope.
 1.15 Wash, 10 lks. wide, course NE. Asc. 139 ft. over SE slope.
 11.90 Road, brs. N-S.
 14.65 Ridge, brs. NW-SE. A butte, brs. N. 45° W., about 25 chs.
 dist., 317 ft. above this point.
 House of Mrs. Draper brs. SE about 6 chs. dist.

Desc. 92 ft. over SW slope.
 23.90 Small wash, course SW. Asc. 18 ft. over SE slope.
 26.90 Spur, brs. S. Desc. 7 ft. over SW slope.
 27.95 Small wash, course S. Asc. 21 ft. over SE slope.
 30.60 Spur, brs. S. Desc. 94 ft. over SW slope.
 36.15 Wash, 20 lks. wide, course NW. Asc. 20 ft. over NE slope.
 40.04 Set an iron post 3 ft. long, 1 in. in diam., 6 ins. in
 the ground to bedrock, deposit a stone mkd. with a
 cross (X) at base of post, raise a md. of stone about
 1/2 post for the 1/4 sec. cor. secs. 1 and 12, with brass
 cap mkd.
 S 11
 S 12
 1929 from which,
 a paloverde, 6 ins. in diam., brs. S. 41° E., 81 lks.
 dist., mkd. 1/4 S12 BT
 No other bearing tree available.

Survey of

BOOK 3882


Part of the Subdivision lines of T.8 N., R.4 W.

Chains

- Asc. gradual NE slope.
- 42.00 Short spur, brs. NW. Desc. 69 ft. over SW slope.
- 45.30 Wash, 10 lks. wide, course NW; Asc. gradual SE slope.
- 49.80 Enter wash from NE-Desc. gradually down same.
- 53.30 Leave wash, course SW. Asc. 27 ft. over SW slope.
- 57.50 Spur, brs. SW. Desc. 49 ft. over NW slope.
- 64.50 Wash, 20 lks. wide, course SW. Asc. gradual SE slope.
- 66.30 Spur, brs. S. Desc. gradual W. slope.
- 67.80 Wash, 20 lks. wide, course S.
Asc. gradual SE slope.
- 69.60 Wash, brs. SW. Over rolling land to cor.
- 71.70 Old road, brs. NW-SE.
- 74.60 Shallow wash, course SW. Asc. gradual SE slope.
- 75.90 Spur, brs. SW. Desc. gradual SW slope to
- 80.08 Intersect the cor. secs. 1, 2, 11 and 12.

Land, rolling and mountainous.
 Soil, rocky 4th. rate.
 Timber, paloverde, ironwood and mesquite.
 Undergrowth, cacti, catclaw and greasewood.


- N.0°01'W., on true line, bet. secs. 1 and 2.
 Over mountainous land, thru scattering timber & undergrowth.
 Desc. 9 ft. over NE slope.
- 5.00 Head of wash, course SW. Asc. 67 ft. over SW slope.
- 10.60 Ridge, brs. E-W. Desc. 17 ft. over N. slope.
- 19.50 Old road, brs. NW-SE.
- 23.80 Small ravine, course NE. Desc. 127 ft. over E. slope.
- 24.85 Wash, 20 lks. wide, course NW. Asc. 20 ft. over SW slope.
- 29.20 Spur, brs. West. Desc. 35 ft. over N. slope.
- 29.55 Wash, course West. Asc. 10 ft. over S. slope.
- 34.65 Spur, brs. NW. Desc. 69 ft. over NE slope.
- 40.00 Set an iron post 3 ft. long, 2 in. in diam., 14 ins. in the
 ground to bedrock, deposit a stone mkd. with a cross
 (X) at base of post, raise a md. of stone about post
 for the 1/4 sec. cor. secs. 1 and 2, with brass cap
 mkd.



1929

- No bearing trees available.
- Desc. 104 ft. over rolling E. slope.
- 47.95 Wash, 10 lks. wide, course NE. (about 3 chs. SW to hd.
 and 3 chs. SE to junction with wash from S.)
 Asc. 15 ft. over SE slope.
- 54.30 Rocky spur, brs. E. Desc. 104 ft. over NE slope.
- 60.85 Old road, brs. NW-SE. Road turns to N., about 50 lks. W.
- 64.15 Small wash, course NE. Asc. 49 ft. over SE slope.
- 67.80 Spur, brs. E. Desc. 41 ft. over NE slope to
- 70.86 Intersect the 2nd. St. Par. N., at 12.95 chs. W. of the
 reestablished Std. 1/4 sec. cor. sec. 36, hereinbefore
 described. At point of intersection set an iron post
 3 ft. long, 2 ins. in diam., 24 ins. in the ground
 for closing cor. secs. 1 and 2, with brass cap mkd.

T9N R4W
 S36



1929

No bearing trees available; Raise a md. of stone 4 ft.
 base, 2 ft. high S. of cor. 3 ft. dist.

Survey of

Part of the Subdivision Lines of T. 8 N. R. 4 W.

Chains

Land, mountainous.
Soil, rocky 4th. rate.
Timber, paloverde, mesquite and ironwood.
Undergrowth, cacti, catclaw and greasewood.

From the cor. secs. 2, 3, 34 and 35 on S. Bdy. of Tp.,
hereinbefore described,
N.0°01'W., on true line, bet. secs. 34 and 35.
Over rolling land, thru scattering timber and undergrowth
Desc. 25 ft. along W. slope.
Wash, 10 lks. wide, course SW.
Lv. rolling, enter mtns. land. Asc. 125 ft. over SW slope.
Spur, brs. SW. Desc. 125 ft. along W. slope.
Center of large wash, 1 ch. wide, course SW.
Asc. 18 ft. along SE slope.
Road, brs. E-W.
Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
the ground for the $\frac{1}{4}$ sec. cor. secs. 34 and 35, with
brass cap mkd.

53.10
6.20
26.20
36.00
37.10
40.00

S34 | S35

1929

from which,

a catclaw limb, 4 ins. in diam., brs. N.87 $\frac{1}{2}$ °E., 11 lks.
dist., mkd. $\frac{1}{4}$ S35 BT
a mesquite, 6 ins. in diam., brs. N.80 $\frac{1}{2}$ °W., 135 lks.
dist., mkd. $\frac{1}{4}$ S34 BT

48.80
50.20
66.40
80.00

Asc. 27 ft. over SW slope.
Spur, SE Des. gradual NE slope.
Wash, 10 lks. wide, course SE.
Asc. 67 ft. over SW slope.
Spur, brs. SW. Desc. 40 ft. over NW slope to
Set an iron post 3 ft. long, 2 ins. in diam., 14 ins. in
the ground to bedrock, deposit a stone mkd. with a
cross (X) at base of post, raise a md. of stone about
post for the cor. secs. 26, 27, 34 and 35, with brass
cap mkd.

T8N	R4W
S27	S26
S34	S35

1929

from which,

a paloverde, 4 ins. in diam., brs. N.58°E., 20 lks.
dist., mkd. BT only.
a palo verde, 5 ins. in diam., brs. S.53 $\frac{1}{2}$ °W., 26 lks.
dist., mkd. T8N R4W S35 BT
a palo verde, 6 ins. in diam., brs. N.11°W., 89 lks.
dist., mkd. T8N R4W S27 BT (No other tree available)

Land, rolling and mountainous.
Soil, rocky 4th. rate.
Timber, paloverde, ironwood and mesquite.
Undergrowth, cacti, catclaw and greasewood.

40.00
80.00

East, on random line, bet. secs. 26 and 35.
Set temp. $\frac{1}{4}$ sec. cor.
Intersect the cor. secs. 25, 26, 35 and 36.
Thence,

Survey of

BOOK 3892

Part of the Subdivision Lines of T. 8 N., R. 4 W.

Chains

West, on true line, bet. secs. 26 and 35.
 Over mountainous land, thru scattering timber & undergrowth.
 Desc. 74 ft. over SW slope.
 3.50 Wash, 10 lks. wide, course S. Asc. 162 ft. over SE slope.
 10.50 Ridge, brs. N. and S. USLM No. 4015 brs. S. 6° 05' W.
 Desc. 321 ft. over SW slope.
 32.90 Wash, 20 lks. wide, course S. Asc. 100 ft. over SE slope.
 36.80 Spur, brs. S. Desc. 56 ft. over SW slope.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in
 the ground to bedrock, deposit a stone mkd. with a
 cross (X) at base of post, raise a md. of stone about
 post for the 1/4 sec. cor. secs. 26 and 35, with brass
 cap mkd.

1/4 S 26
S 35

1929

No bearing trees available.
 Desc. gradual SW slope.
 44.10 Small ravine course S. Asc. 17 ft. over SE slope.
 44.60 Spur, brs. S. Desc. 21 ft. over W. slope.
 51.30 Wash, 10 lks. wide, course S. Asc. 11 ft. over W. slope.
 65.00 Wash, 50 lks. wide, course SW. Asc. gradual SE slope.
 76.00 Spur, brs. S. Desc. gradual SW slope to
 90.00 Intersect the cor. secs. 26, 27, 34 and 35.

Land, mountainous.
 Soil, rocky. 4th. rate.
 Timber, paloverde, ironwood and mesquite.
 Undergrowth, cacti, catclaw and greasewood.

West, on random line, bet. secs. 27 and 34.
 40.00 Set temp. 1/4 sec. cor.
 79.96 Fall 5 lks. N. of the cor. secs. 27, 28, 33 and 34.
 Thence
 N. 89° 58' E., on true line, bet. secs. 27 and 34.
 Over rolling land, thru scattering timber and Undergrowth.
 Slight desc. over SE slope.
 3.60 Wash, 40 lks. wide, course SW. Asc. 98 ft. over NW slope.
 20.00 Desc. 59 ft. over NE slope.
 27.60 Road, brs. NW-SE.
 29.20 Wash, 30 lks. wide, course NW.
 Asc. 78 ft. over W. slope.
 38.70 Spur, brs. SW. Desc. 9 ft. over SE slope to
 39.98 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the
 ground for the 1/4 sec. cor. secs. 27 & 34, with brass
 cap mkd.

1/4 S 27
S 34

1929

No bearing trees available.
 Desc. 23 ft. over SE slope.
 64.10 Road, brs. NE-SW.
 67.50 Wash, 40 lks. wide, course S. Asc. 33 ft. over gradual
 SW slope.
 78.40 Spur, brs. SW. Desc. gradual SE slope.
 79.50 Wash, course SW. Asc. gradual SW slope.
 79.96 Intersect the cor. secs. 26, 27, 34 and 35.

Survey of

Part of the Subdivision Lines of T. 8 N., R. 4 W.


Chains

Land, rolling.
Soil, rocky 4th. rate.
Timber, paloverde, mesquite and ironwood.
Undergrowth, cacti, catclaw and greasewood.

N.0°01'W., on true line, bet. secs. 26 and 27.
Over rolling land, thru scattering timber & undergrowth.
2.00 Spur, brs. SW.
4.70 Wash, 20 lks. wide, course SW. From this point, House
of Jim Miller, brs. N.33°25'E.
His windmill, brs. N.38°E.
7.10 Road, brs. NE-SW.
22.00 Wash, 30 lks. wide, course SW. Lv. rolling, enter mtns.
land, ascending 102 ft. over S. slope to
40.00 Set an iron post 3 ft. long, 1 in. in diam., 14 ins. in
the ground to bedrock, raise a md. of stone about post,
for the 1/4 sec. cor. secs. 26 & 27, with brass cap mkd.

1929
a paloverde, 6 ins. in diam., brs. S.61°W., 24 lks.
dist. mkd. S27 BT
a six-inch cross, chiseled (with letters) S26BR brs.
N.40°E., 13 lks. dist.
From cor. Jim Millers house brs. S.16°35'E.,
Cor. dis. at head of small wash, course SE.

Asc. 79 ft. over S. slope.
44.70 Ridge, brs. E-W. Desc. 150 ft. over N. slope.
55.00 Wash, 20 lks. wide, course W. Asc. gradually over SE slope
to cor. Leave mountainous, enter rolling land.
65.70 Old road, brs. E-W.
68.60 Graded road, brs. NE-SW.
75.50 Telephone line, brs. NE-SW.
80.00 Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in
the ground for the cor. secs. 22, 23, 26 and 27, with
brass cap mkd.



1929
a paloverde, 6 ins. in diam., brs. N.7°E., 40 lks.
dist. mkd. T8N R4W S23 BT
No other bearing trees available.
Raise a md. of stone 4 ft. base, 2 ft. high W. of cor.
3 ft. distant.

Land, rolling & mountainous.
Soil, rocky 4th. rate.
Timber, paloverde, ironwood & mesquite.
Undergrowth, cacti, catclaw and greasewood.

East, on random line, bet. secs. 23 & 26.
40.00 Set temp. 1/4 sec. cor.
79.86 Fall 5 lks. S. of the cor. secs. 23, 24, 25 & 26.
Thence
S.89°58'W., on true line, bet. secs. 23 & 26.
Over rolling land, thru scattering timber & undergrowth.
5.90 Old road, brs. N-S.
8.00 Enter clearing, extends N-S., small brush shack brs. S.
about 7 chs. dist.
12.00 Leave clearing, brs. N-S. Asc. gradual E. slope.

Part of the Subdivision Lines of T. 8 N., R. 4 W.

Chains

- 20.70 Low spur, brs. S.
- 32.20 Wash, 20 lks. wide, course S.
- 39.93 Set an iron post 3 ft. long, .1 in. in diam., 26 ins. in the ground for the 1/4 sec. cor. secs. 23 & 26, with brass cap mkd.

$$\frac{1}{4} \frac{S 23}{S 26}$$

1929

No bearing trees available; raise a md. of stone 4 ft. base, 2 ft. high N. of cor.

Asc. gradual SE slope.

- 43.90 Spur, brs. S. Desc. 40 ft. over W. slope.
- 45.30 Wash, 10 lks. wide, course S. Asc. 40 ft. over SE slope.
- 49.40 Ridge, brs. NE-SW. Desc. 51 ft. over NW slope.
- 53.90 Graded road, brs. NE-SW. Asc. gradual SE slope to cor.
- 55.90 Wash, 20 lks. wide, course SW. Asc. gradual SE slope to cor.
- 74.10 Telephone line, brs. NE-SW.
- 79.86 Intersect the cor. secs. 22, 23, 26 and 27.

Land, rolling.

Soil, rocky 4th. rate.

Timber, paloverde, ironwood and mesquite.

Undergrowth, cacti, catclaw and greasewood.

S. 89° 58' W., on random line, bet. secs. 22 and 27.

- 40.00 Set temp. 1/4 sec. cor.

- 80.04 Fall 3 lks. S. of the reestablished cor. secs. 21, 22, 27 and 28, hereinbefore described.

Thence,

N. 89° 59' E., on true line, bet. secs. 22 and 27.

Over rolling land, thru scattering timber & undergrowth.

Desc. gradual SE slope.

- 5.00 Wash, 50 lks. wide, course SW. Enter mountainous land, ascending 242 ft. over SW slope.

- 8.20 Old road, brs. NW-SE.

- 26.80 Spur, brs. NE-SW. Desc. 38 ft. over SE slope.

- 36.60 Wash, 20 lks. wide, course SW. Asc. gradual W. slope to

- 40.02 Set an iron post 3 ft. long, 1 in. in diam., 8 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone 4 ft. base, 2 ft. high N. of cor., for the 1/4 sec. cor. secs. 22 & 27, with brass cap mkd.

$$\frac{1}{4} \frac{S 22}{S 27}$$

1929

No bearing trees available.

Desc. 45 ft. over E. slope.

- 48.90 Center of wash, 1 ch. wide, course SW,

Asc. 53 ft. over SW slope.

- 61.30 Spur, brs. SW. Desc. 31 ft. over E. slope.

- 66.50 Center of wash, 50 lks. wide, course SW.

Thence, over rolling land.

- 70.00 Old road, brs. NE-SW.

- 80.04 Intersect the cor. secs. 22, 23, 26 and 27.

Land; rolling, mountainous and level.

Soil, rocky 4th. rate.

Timber, paloverde, ironwood and mesquite.


Undergrowth, cacti, catclaw and greasewood.

Survey of

Part of the Subdivision Lines of T. 8 N., R. 4 W.


Chains

- N.0°01'W., on true line, bet. secs. 22 and 23.
- Over rolling land, thru scattering timber & undergrowth.
- Asc. gradual SW slope.
- 6.50 Old road, brs. NE-SW.
- 7.80 Old road, brs. NE-SW.
- 20.60 Shallow wash, course SW.
- 21.60 Old road, brs. NE-SW.
- 24.90 Old road, brs. NE-SW.
- 33.30 Shallow wash, 20 lks. wide, course SW.
- Asc. 13 ft. over S. slope.
- 39.00 Low ridge, brs. E-W. Desc. gradual N. slope.
- Old road, on same, brs. NW-SE.
- Desc. gradual N. slope to
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the 1/4 sec. cor. secs. 22 and 23, with brass cap mkd.



1929 from which,
 a palo verde, 4 ins. in diam., brs. N. E., 14 lks. dist., mkd. BT only.
 a palo verde, 6 ins. in diam., brs. N. W., 69 lks. dist., mkd. 1/4 S 22 BT

- Desc. 55 ft. over N. slope. Enter mountainous land.
- 45.15 Wash, 10 lks. wide, course NW. Asc. 39 ft. over SW slope.
- 50.00 Spur, brs. NW. Desc. 37 ft. over N. slope.
- 53.15 Wash, 50 lks. wide, course SW.
- Asc. 123 ft. over S. slope.
- 62.10 Old road, brs. E-W.
- 79.00 Spur, brs. SW. Desc. 11 ft. over NW slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post for the cor. secs. 14, 15, 22 and 23, with brass cap mkd.



No bearing trees available.

Land, rolling and mountainous.
 Soil, rocky 4th. rate.
 Timber, paloverde, ironwood and mesquite.
 Undergrowth, cacti, catclaw and greasewood.

- N.89°58'E., on random line, bet. secs. 14 & 23.
- 40.00 Set temp. 1/4 sec. cor.
- 79.94 Fall 3 lks. N. of the cor. secs. 13, 14, 23 and 24.
- Thence,
- S.89°59'W.; on true line, bet. secs. 14 and 23.
- Over rolling land, thru scattering timber & undergrowth.
- .65 Graded road, brs. NE-SW.
- 2.00 Shallow wash, course SW. Asc. gradual SE slope.
- 15.60 Ridge, brs. N-SW. Desc. 33 ft. over SW slope.
- 31.60 Wash, 30 lks. wide, course S. Asc. 33 ft. over SE slope.
- 35.45 Spur, brs. SW. Desc. gradual NW slope to
- 39.97 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post for the 1/4 sec. cor. of secs. 14 and 23, with brass cap mkd.

Survey of

BOOK 3892

Part of the Subdivision Lines of T.8 N., R.4 W.

Chains	
	$\frac{1}{4} \frac{S 14}{S 23}$
	1929
	No bearing trees available.
43.25	Desc. 33 ft. over SW slope. Enter mountainous land.
55.15	Wash, 20 lks. wide, course SW. Thence, along same.
79.94	Leave wash, course NW. Asc. 155 ft. over NE slope to Intersect the cor. secs. 14, 15, 22 and 23.
	Land, rolling and mountainous. Soil, rocky 4th. rate. Timber, paloverde, ironwood and mesquite. Undergrowth, cacti, catclaw and greasewood.

40.00	S. 89°59'W., on random line, bet. secs. 15 and 22.
79.98	Set temp. $\frac{1}{4}$ sec. cor. Fall 2 lks. N. of the cor. secs. 15, 16, 21 and 22. Thence, N. 89°58'E., on true line, bet. secs. 15 and 22.
	Over mountainous land, thru scattering timber & undergrowth. Asc. 22 ft. over NW slope.
2.40	Spur, brs. N. Desc. 36 ft. over NE slope.
5.20	Head of wash, course NW. Asc. 99 ft. over NW slope.
15.70	Ridge, brs. NE-SW. Desc. 114 ft. over SE slope.
29.30	Wash, 20 lks. wide, course SW. Asc. 110 ft. over NW slope.
39.99	Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post, for the $\frac{1}{4}$ sec. cor. secs. 15 and 22, with brass cap mkd.
	$\frac{1}{4} \frac{S 15}{S 22}$
	1929
	No bearing trees available.
41.10	Asc. 12 ft. over NW slope.
52.45	Spur, brs. SW. Desc. 116 ft. over SE slope.
	Wash, 10 lks. wide, course SW. Asc. 46 ft. over W. slope.
56.00	Spur, brs. SW. Desc. 131 ft. over SE slope.
63.50	Center of Blue Tank Wash, 40 lks. wide, course SW.
79.98	Asc. 198 ft. over NW slope to Intersect the cor. secs. 14, 15, 22 and 23.
	Land, mountainous. Soil, rocky 4th. rate. Timber, paloverde, ironwood and mesquite. Undergrowth, cacti, catclaw and greasewood.


	N. 0°01'W., on true line, bet. secs. 14 and 15.
	Over mountainous land, thru scattering timber & undergrowth. Desc. 135 ft. over NW slope.
6.00	Center of Blue Tank Wash, 40 lks. wide, course SW.
	Asc. 91 ft. over S. slope.
9.10	Spur, brs. SW. Desc. 98 ft. over NW slope.
17.70	Wash, 30 lks. wide, course W. Asc. 188 ft. over S. slope.
36.60	Ridge, brs. NE-SW. Desc. 60 ft. over N. slope.
40.00	Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, deposit a stone at base of post, raise a md. of stone about post for the $\frac{1}{4}$ sec. cor. of

Survey of

Part of the Subdivision Lines of T.8 N., R.4 W.

Chains


secs. 14 and 15, with brass cap mkd.



1929

No bearing trees available.

- 44.00 Desc. 52 ft. over NW slope.
- 47.00 Wash, 20 lks. wide, course W. Asc. 51 ft. over S. slope.
- 52.00 Spur, brs. W. Desc. 57 ft. over N. slope.
- 66.10 Wash, 20 lks. wide, course SW. Asc. 184 ft. over S. slope.
- 71.00 Spur, brs. W. Desc. 57 ft. over N. slope.
- 80.00 Wash, 10 lks. wide, course SW. Asc. 55 ft. over S. slope.
- Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in the ground for the cor. secs. 10, 11, 14 and 15, with brass cap mkd.




1929

No bearing trees available.

Raise a md. of stone 4 ft. base, 2 ft. high W. of cor. 3 ft. dist.

Land, mountainous.
 Soil, rocky 4th. rate.
 Timber, paloverde, ironwood and mesquite.
 Undergrowth, cacti, catclaw and greasewood.

- 40.00 N. 89° 59' E., on random line, bet. secs. 11 and 14.
- 79.94 Set temp. 1/4 sec. cor.
- Fall 21 lks. S. of the cor. secs. 11, 12, 13 and 14.
- Thence,
- S. 89° 50' W., on true line, bet. secs. 11 and 14.
- Over mountainous land, thru scattering timber & undergrowth.
- Asc. slight NE slope.
- .50 Spur, brs. N. Desc. 27 ft. over NW slope.
- 3.20 Wash; 20 lks. wide, course NW. Asc. 92 ft. along N. slope.
- 14.40 Spur, brs. NW. Desc. 103 ft. over SW slope.
- 23.20 Wash, 20 lks. wide, course NW: Asc. 112 ft. over NE slope.
- 26.00 Spur; brs. N. Desc: 34 ft. over NW slope.
- 29.00 Wash, 20 lks. wide, course N. Asc. 50m ft. over NE slope.
- 38.30 Spur, brs. N. Desc. gradual NW slope to
- 39.97 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the 1/4 sec. cor. secs. 11 and 14, with brass cap mkd.



1929

No bearing trees available; raise a md. of stone 4 ft. base, 2 ft. high N. of cor. 3 ft. dist.

- 41.30 Desc. 9 ft. over NW slope.
- 58.50 Wash, 20 lks. wide, course NE. Asc. 151 ft. over NE slope.
- Spur, brs. NW; with one branching SW. Desc. 23 ft. over NW slope.

Survey of

BOOK 3892

Part of the Subdivision Lines of T. 8 N., R. 4 W.

Chains	
68.90	Wash, 10 lks. wide, course NW. Continue desc. along NW slope to
79.94	Intersect the cor. secs. 10, 11, 14 and 15.
Land, mountainous. Soil, rocky 4th. rate. Timber, paloverde, ironwood and mesquite. Undergrowth, cacti, catclaw and greasewood.	

40.00	S. 89° 58' W., on random line, bet. secs. 10 and 15. Set temp. 1/4 sec. cor.
80.44	Fall 12 lks. S. of the reestablished cor. secs. 10 and 15, hereinbefore described.
Thence,	
S. 89° 57' E., on true line, bet. secs. 10 and 15.	
Over mountainous land, thru scattering timber & undergrowth.	
Asc. 89 ft. over W. slope.	
6.80	Spur, brs. NW; branch spur brs. SW. Continue on gradual asc. up main spur.
23.00	Leave spur to SE; desc. 79 ft. over NE slope.
27.80	Head of wash, course N. Asc. 56 ft. over NW slope.
30.90	Spur, brs. N. Desc. 61 ft. over NE slope.
33.75	Wash, near hd., course N. Asc. 35 ft. over NW slope.
38.50	Spur, brs. N. Desc. gradual NE slope.
40.22	Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the 1/4 sec. cor. secs. 10 and 15, with brass cap mkd.
$\frac{1}{4} \begin{matrix} S 10. \\ S 15 \end{matrix}$	
1929	
No bearing trees available; raise a md. of stone 4 ft. base, 2 ft. high N. of cor.	
Desc. 22 ft. over NE slope.	
41.90	Wash, 10 lks. wide, course N. Asc. 56 ft. over NW slope.
45.00	Spur, brs. NW. Desc. 17 ft. over NE slope.
47.25	Wash, 10 lks. wide; course NW. Asc. 96 ft. over W. slope.
51.30	Spur, brs. NW. Desc. gradual NE slope.
54.40	Wash, course NW. Asc. 80 ft. over W. slope.
58.55	Spur, brs. SW. Desc. 43 ft. over SE slope.
69.60	Wash, 20 lks. wide, course SW. Asc. 93 ft. over NW slope to
80.44	Intersect the cor. secs. 10, 11, 14 and 15.
Land, mountainous. Soil; rocky 4th. rate. Timber, paloverde, ironwood and mesquite. Undergrowth, cacti, catclaw and greasewood.	

N. 0° 01' W., on true line, bet. secs. 10 and 11.	
Over mountainous land, thru scattering timber & undergrowth.	
Desc. 68 ft. over N. slope.	
3.15	Wash, 20 lks. wide, course SW. Asc. 40 ft. over SW slope.
6.00	Spur, brs. W. Desc. gradually along rolling W. slope.
10.50	Spur, brs. W. About 4 chs. W. spur branches N.
Desc. 154 ft. over NE slope.	
17.35	Bend in wash, from SE to NE, main channel about 70 lks. E.
Asc. 37 ft. over SE slope.	
28.70	Spur, brs. E. Desc. 12 ft. over NE slope.
31.35	Wash, 10 lks. wide, course SE. Asc. 65 ft. over SE slope.

Survey of

Part of the Subdivision Lines of T. 8 N., R. 4 W.

Chains

36.30 Spur, brs. NE. Desc. 107 ft. over N. slope.
40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the 1/4 sec. cor. secs. 10 and 11, with brass cap mkd.

1/4

S10 | S11

1929

No bearing trees available; raise a md. of stone 4 ft. base, 2 ft. high W. of cor. 3 ft. dist.

47.40 Desc. 243 ft. over steep, broken slope.
Center of King Solomon Wash, 150 lks. wide, course W.

67.90 Asc. 398 ft. over steep, broken S. slope.
80.00 Narrow spur, brs. West. Desc. 151 ft. over N. slope to Set an iron post 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post for the cor. secs. 2, 3, 10 and 11, with brass cap mkd.

T8N R4W

S3 | S2

S10 | S11

1929

No bearing trees available.

Land, mountainous.
Soil, rocky 4th. rate.
Timber, paloverde, ironwood and mesquite.
Undergrowth, cacti, catclaw and greasewood.

40.00 N. 89° 50' E., on random line, bet. secs. 2 & 11.
80.00 Set temp. 1/4 sec. cor.
Fall 28 lks. N. of the cor. secs. 1, 2, 11 and 12.
Thence
N. 89° 58' W., on true line, bet. secs. 2 and 11.
Over mountainous land, thru scattering timber & undergrowth.
Desc. slight NW slope.
.40 Shallow wash, course SE. Asc. 45 ft. over SE slope.
4.00 Spur, brs. S. Desc. 45 ft. over W. slope.
5.40 Head of wash, course S. Asc. 72 ft. over SE slope.
9.80 Spur, brs. S. Desc. 51 ft. over W. slope.
17.80 Wash, 10 lks. wide, course S. Asc. 286 ft. over SE slope.
26.70 Spur, brs. S. Asc. gradually over S. slope.
33.80 Ridge, brs. NE-SW. Desc. 36 ft. over NW slope to
40.00 Set an iron post 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post, for the 1/4 sec. cor. secs. 2 and 11, with brass cap mkd.

S 2

S 11

1929

40.09 Cor. set on spur, which brs. NW.
Over level top.
From which, USLM No. 1866 brs. S. 33° E., 3.55 chs. dist., which is 6 x 8 ins. wooden post, projecting 5 ft. above ground and large circular md. of stone, mkd. USLM 1866 on S. face.

Part of the Subdivision Lines of T. 8 N., R. 4 W.

Chains	
41.33	Desc. 147 ft. over W. slope to wash. Intersect the SE side line (1-4) of the patented lode mining claim "Corse Gold", Min. Sur. No. 1866, at 9.54 chs. N. 17° 51' E. from cor. No. 1. Thence across said claim.
50.20	Wash, 20 lks. wide, course NW. Asc. 74 ft. over NE slope.
50.87	Intersect the NW side line (2-3) of the "Corse Gold" patented lode-mining claim, Min. Sur. No. 1866 at 9.47 chs. S. 17° 51' W., of cor. No. 1 thereof. Leave pat. min. land.
53.60	Spur, brs. NW. Desc. 136 ft. over NW slope.
58.70	Head of wash, course NW. Asc. 32 ft. over NE slope.
63.00	Spur, brs. NW. Desc. 182 ft. over NW slope.
72.15	Wash, 10 lks. wide, course NW. Asc. 16 ft. over NE slope.
73.90	Spur, brs. N., Desc. 54 ft. over NW slope to
80.00	Intersect the cor. secs. 2, 3, 10 and 11.
Land, rough, mountainous. Soil, rocky 4th. rate. Timber, paloverde, ironwood and mesquite. Undergrowth, cacti, catclaw and greasewood.	
40.00	N. 89° 57' W., on random line, bet. secs. 3 and 10. Set temp. 1/4 sec. cor.
80.42	Fall 18 lks. N. of the reestablished cor. of secs. 3 and 10 on the E. bdy. sec. 4, hereinbefore described. Thence,
N. 89° 55' E., on true line, bet. secs. 3 and 10. Over mountainous land, thru scattering timber & undergrowth. Over level bench.	
6.50	Old road, brs. NW-SE.
7.70	Wire fence, brs. NW-SE.
9.20	Leave mesa, brs. N-S. Desc. 20 ft. over W. bank of river.
10.70	Enter bottom of river; brs. N-S. Road, brs. N-S.
11.10	Stream of water, 50 lks. wide, 6 ins. deep, in center of Hassayampa River bottom, course South.
26.30	Leave river bottom, about 40 lks. S. of King Solomon Wash. Asc. 40 ft. over NW slope.
27.70	Sharp spur, brs. N. Desc. 35 ft. over NE slope.
34.35	Center of King Solomon Wash, 100 lks. wide, course NW. Asc. 124 ft. over SW slope.
40.21	Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the 1/4 sec. cor. secs. 3 and 10, with brass cap mkd.
$\frac{1}{4} \begin{matrix} S 3 \\ S 10 \end{matrix}$ <p>1929</p>	
No bearing trees available; raise a md. of stone 4 ft. base, 2 ft. high N. of cor.	
51.00	Asc. 227 ft. over SW slope. Spur, brs. N. Desc. 35 ft. over NE slope.
55.50	Wash, 10 lks. wide, course N. Asc. 164 ft. over broken NW slope.
72.65	Rocky spur, brs. N. Desc. 36 ft. over E. slope.
74.60	Wash, 40 lks. wide, course N. Asc. 12 ft. over W. slope.
78.80	Spur, brs. N. Desc. gradual NE slope to
80.44	Intersect the cor. secs. 2, 3, 10 and 11.
Land, rough mountainous. Soil, rocky 4th. rate. Timber, mesquite, paloverde and ironwood. Undergrowth, cacti, catclaw and greasewood.	

Survey of

Part of the Subdivision Lines of T. 8 N., R. 4 W.

Chains

N.0°01'W., on true line, bet. secs. 2 and 3.
Over mountainous land, thru scattering timber & undergrowth
Desc. 129 ft. over NE slope.

- 8.90 Wash, 20 lks. wide, course NW. Asc. gradual SE slope.
- 10.40 Low spur, brs. NW. Desc. 27 ft. over NE slope.
- 12.40 Wash, 20 lks. wide, course NW. Asc. 30 ft. over SW slope.
- 15.10 Spur, brs. NW. Desc. 37 ft. over N. slope.
- 15.50 Old road, brs. E-W.
- 19.10 Wash, 20 lks. wide, course NW. Asc. 111 ft. over rocky south slope.
- 27.50 Spur, brs. SW. Desc. 175 ft. over NW slope.
- 29.30 Wash, at junction of washes from NE & SE, 20 lks. wide, course NW. Asc. 20 ft. over S. slope to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post, for the 1/4 sec. cor. secs. 2 and 3, with brass cap mkd.

1/4

S3 | S2

1929

No bearing trees available.

- Asc. 92 ft. over S. slope.
- 45.90 Spur, brs. NW. Desc. 68 ft. over NE slope.
- 49.70 Wash, 10 lks. wide, course NW.
- 52.15 Spur, brs. NW. Desc. 170 ft. over N. slope.
- 59.00 Center of wash, 150 lks. wide, course W.
- Over rolling bottom land.
- 62.65 Road, brs. E-W.
- 62.75 Wire fence, brs. E-W.
- 70.66 Intersect the 2nd. St. Par. N., at 12.96 chs. West. of the reestablished Sta. 1/4 sec. cor. sec. 35, hereinbefore described. At point of intersection set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post for the closing cor. of secs. 2 and 3, with brass cap mkd.

T9N R4W

S35

S3 CC S2

T8N R4W

1929


from which,
a mesquite, 8 ins. in diam., brs. S.34°W., 214 lks. dist., mkd. T8N R4W S3 CGBT
No other bearing tree available.

Land, mountainous and rolling.
Soil, rocky 4th. rate.
Timber, paloverde, ironwood and mesquite.
Undergrowth, cacti, catclaw and greasewood.

Part of the Subdivision Lines of Township 8 North, Range 4 W.

chains


From the $\frac{1}{4}$ sec.cor.of sec.4 only, (E. $\frac{1}{4}$ cor.), hereinbefore described,
 N.0° 2'W., on true line, on E. bdy.of sec.4 (N. $\frac{1}{4}$)
 Over rolling land, thru scattering timber and undergrowth.
 Desc. 20 ft. over NE. slope.
 0.90 Enter wash, course SE. Thence across wash.
 2.00 Old road, brs. NW.-SE.
 4.50 True point for the reestablishment of the $\frac{1}{4}$ sec.cor.of sec.3 only (W. $\frac{1}{4}$ cor.) falls in wash, where it is impracticable to monument the cor., therefore establish witness cor. at 2.20 chs.N.0°2'W.
 5.40 Leave wash and asc. 33 ft. over SW. slope to
 6.70 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for witness cor. to reestablished $\frac{1}{4}$ sec.cor. of sec.3 only, with brass cap mkd.



from which

a paloverde, 6 ins. in diam., brs. N.64 $\frac{1}{2}$ °E., 116 lks.
 dist., mkd. WC $\frac{1}{4}$ S3 BT
 a paloverde, 6 ins. in diam., brs. N.28 $\frac{1}{2}$ °E., 104 lks.
 dist., mkd. WC $\frac{1}{4}$ S3 BT

Asc. 57 ft. over SW. slope.
 10.60 Wire fence, brs. NW.-SE.
 21.70 Spur, brs. SE. Desc. 33 ft. over NE. slope.
 25.60 Wash, 20 lks. wide, course SE. Asc. 29 ft. over SW. slope.
 32.20 Wire fence, brs. E.-W.
 35.42 Intersect N. bdy. of the Tn. (2nd Std. Par. N.) at 13.22 chs. W. of the reestablished std. $\frac{1}{4}$ sec.cor. of sec. 34, hereinbefore described.
 At point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, and raise a mound of stone about post, for closing cor. of secs. 3 and 4, with brass cap mkd.



1929

No bearing trees available.
 Land, rolling.
 Soil, rocky, 4th rate.
 Timber, paloverde, mesquite and ironwood.
 Undergrowth, cacti, catclaw and greasewood.


From the cor. of secs. 20, 21, 28 and 29,
 N.0° 2'W., on true line, bet. secs. 20 and 21.
 Over mountainous land, thru scattering timber and undergrowth.
 Desc. 29 ft. over N. slope.
 1.80 Enter Blue Tank Wash, course SW.
 6.70 Leave wash. Asc. 62 ft. over SE. slope.
 10.60 Spur, brs. SW. Desc. 45 ft. over NW. slope.
 15.40 Wash, 10 lks. wide, course SW. Asc. gradually over S. slope.
 16.60 Point of spur, brs. E. Desc. 14 ft. over NE. slope.
 18.20 Same wash, course SE. Asc. 86 ft. over S. slope.
 26.50 Spur, brs. W. Desc. gradually over N. slope.
 27.60 Wash, 10 lks. wide, course SW. Asc. 274 ft. over S. slope to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X)

Survey of

Part of the Subdivision Lines of T.8 N., R.4 W.

chains


at base of post, and raise a mound of stone about post, for $\frac{1}{4}$ sec. cor. of secs. 20 and 21, with brass cap mkd.



1929

No bearing trees available.

- Asc. 25 ft. over SW. slope.
- 41.00 Narrow ridge, brs. E.-W. U.S.G.S. B.M. 3187 brs. N. $69^{\circ} 7' W.$ Butte brs. E. 4 chs. dist.
- Desc. 324 ft. over N. slope.
- 56.60 Wash, 20 lks. wide, course W. Asc. 76 ft. over S. slope.
- 60.90 Spur, brs. SW. Desc. 16 ft. over NW. slope.
- 62.25 Wash, 20 lks. wide, course W. Asc. 110 ft. over SE. slope
- 70.10 Spur, brs. SW. Desc. 103 ft. over NW. slope.
- 78.80 Wash, 20 lks. wide, course W. Asc. gradually over S. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 16, 17, 20 and 21, with brass cap mkd.




1929

No bearing trees available.
raise a mound of stone, 4 ft. base, 2 ft. high, W. of cor.

Land, mountainous.
Soil, rocky, 4th rate.
Timber, paloverde, mesquite and ironwood.
Undergrowth, cacti, catclaw and greasewood.

- 40.00 N. $89^{\circ} 59' E.$, on random line, bet. secs. 16 and 21.
- Set temp. $\frac{1}{4}$ sec. cor.
- 80.08 Intersect the reestablished cor. of secs. 15, 16, 21 and 22.
- Thence S. $89^{\circ} 59' W.$, on true line, bet. secs. 16 and 21.
- Over mountainous land, thru scattering timber and undergrowth.
- Desc. 29 ft. over NW. slope.
- 12.00 Wash, 10 lks. wide, course SW. Asc. 41 ft. over SE. slope.
- 20.00 Spur, brs. SW. Thence across flat top of spur.
- 30.00 Leave top of spur. Desc. 109 ft. over NW. slope.
- 33.40 Head of wash, course NW. Asc. 23 ft. over NE. slope to
- 40.04 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of secs. 16 and 21, with brass cap mkd.



1929

No bearing trees available.
raise a mound of stone, 4 ft. base, 2 ft. high, N. of cor.

- Asc. 52 ft. over NE. slope.
- 49.90 Spur, brs. NW. Desc. 45 ft. over SW. slope.
- 70.20 Wash, 10 lks. wide, course SW. Thence along S. slope,
- 80.08 Intersect the cor. of secs. 16, 17, 20 and 21.
- Land, mountainous and level.
- Soil, rocky, 4th rate.
- Timber, paloverde, mesquite and ironwood.
- Undergrowth, cacti, catclaw and greasewood.


From the cor. of secs. 8, 9, 16 and 17,
S. $0^{\circ} 2' E.$, on random line, bet. secs. 16 and 17.

Survey of

Part of the Subdivision Lines of T.8 N., R.4 W. **BOOK 3892**


chains
77.58

Fall 4 lks.W. of the cor.of secs.16,17,20 and 21.
 Thence
 N.0° 4'W.,on true line, bet. secs.16 and 17.
 Over mountainous land,thru scattering timber and under-
 growth.
 Asc. 48 ft. over S. slope.
 3.40 Spur, brs. W. Desc. 142 ft. over N. slope.
 20.20 Wash, 10 lks.wide, course NW. Asc.52 ft.over SW.slope.
 23.30 Spur, brs. NW. Desc. 39 ft. over NE. slope.
 24.60 Wash, 30 lks.wide, course W. Asc. 56 ft.over S. slope.
 31.60 Spur, brs. W. Desc. 71 ft.over N.slope to
 40.00 Set an iron post, 3 ft.long, 1 in.in diam.,26 ins.in the
 ground,for $\frac{1}{4}$ sec.cor.of secs.16 and 17,with brass cap
 mkd.



No bearing trees available.
 raise a mound of stone, 4 ft.base,2 ft.high,W.of cor.
 Desc. 23 ft.over N. slope.
 42.20 Wash, 10 lks.wide, course W. Asc. 94 ft.over S.slope.
 53.80 Spur, brs. W. Desc. 37 ft.over N. slope.
 57.00 Wash, 10 lks.wide, course NW. Asc.50 ft.over SW.slope.
 64.35 Spur, brs. NW. Desc.279 ft.over N. slope to
 77.58 Intersect the cor.of secs.8,9,16 and 17.
 Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, paloverde,mesquite and ironwood.
 Undergrowth, cacti,catclaw and greasewood.

From the $\frac{1}{4}$ sec.cor.of secs.4 and 5,hereinbefore described,
 N.0° 2'W.;on true line, bet. secs.4 and 5 (N. $\frac{1}{2}$)
 Over rolling land, thru scattering timber and under-
 growth.
 Desc. gradually over E. slope.
 10.30 Old road, brs. NW.-SE.
 16.30 Desc. 46 ft. over NE. slope
 20.30 Edge of wash, brs. NW.-SE. Thence across wash,course SE.
 33.53 Intersect the N. bdy. of the Tp. (2nd Std.Par.N.) at
 13.67 chs. W. of the Std. $\frac{1}{4}$ sec.cor.of sec.33, T.9 N.,
 R.4 W.,hereinbefore described.
 At point of intersection,
 set an iron post, 3 ft.long, 2 ins.in diam., 26 ins.
 in the ground, for closing cor. of secs. 4 and 5,
 with brass cap mkd.



No bearing trees available.
 raise a mound of stone, 4ft.base,2 ft.high, S.of cor.
 Land, rolling.
 Soil, rocky, 4th rate.
 Timber, paloverde,mesquite and ironwood.
 Undergrowth, cacti, greasewood and catclaw.

Survey of

Part of the Subdivision lines of T.8 N., R.4 W.

chains


From the reestablished cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., hereinbefore described, N.0° 3' W., on true line, bet. secs. 31 and 32. Over rolling land, thru scattering timber and undergrowth.

13.30 Telephone line, brs. NE.-SW.

14.90 Wash, 20 lks. wide, course W.

27.20 Wash, 20 lks. wide, course SW.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 in. in the ground to bedrock, and raise a mound of stone about post, for $\frac{1}{4}$ sec. cor. of secs. 31 and 32, with brass cap mkd.



from which

a paloverde, 10 ins. in diam., brs. N.60 $\frac{1}{2}$ ° W., 81 lks. dist., mkd. $\frac{1}{4}$ S31 BT


a paloverde, 6 ins. in diam., brs. S.16° E., 157 lks. dist., mkd. $\frac{1}{4}$ S32 BT

Asc. 151 ft. over SE. slope.

68.65 Spur, brs. E. Small butte brs. W. 50 lks. dist. Desc. 40 ft. over NE. slope.

76.00 Saddle, brs. E.-W. asc. gradually over SE. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 29, 30, 31 and 32, with brass cap mkd.



1929

from which

an iron wood, 12 ins. in diam., brs. N.5° E., 50 lks. dist., mkd. T8N R4W S29 BT

No other bearing trees available.

raise a mound of stone, 4 ft. base, 2 ft. high, W. of cor.

Land, rolling and mountainous.

Soil, rocky, 4th rate.

Timber, paloverde, ironwood and mesquite.


Undergrowth, cacti, catclaw and greasewood.

Survey of

Part of the Subdivision Lines of T. 8 N., R. 4 W.

Chains

40.00 East, on random line, bet. secs. 29 and 32.
 Set temp. 1/4 sec. cor.
 80.06 Fall 7 lks. N. of the cor. secs. 28, 29, 32 & 33.
 Thence,
 N. 89° 57' W., on true line, bet. secs. 29 & 32.
 Over rolling land, thru scattering timber & undergrowth.
 Desc. gradual SW slope.
 2.60 Wash, 20 lks. wide, course SW.
 20.20 Wash, 50 lks. wide, course S. Asc. 78 ft. over E. slope.
 31.00 Spur, brs. Southside, Desc. 77 ft. over NW slope.
 40.03 Set an iron post 3 ft. long, 1 in. in diam., on bedrock,
 deposit a stone mkd. with a cross (X) at base of post,
 raise a md. of stone about post for the 1/4 sec. cor.
 secs. 29 and 32, with brass cap mkd.



1929

No bearing trees available.
 Asc. 76 ft. over SE slope. Enter mountainous land.
 46.80 Spur, brs. S. Desc. 183 ft. over SW slope.
 55.20 Wash, 10 lks. wide, course SW. Asc. 70 ft. over SE slope.
 67.00 Spur, brs. SW. Desc. 133 ft. over NW slope.
 73.30 Wash, 20 lks. wide, course S. Asc. 34 ft. over SE slope.
 80.06 Intersect the cor. secs. 29, 30, 31 & 32.
 Land, rolling & mountainous.
 Soil, rocky 4th. rate.
 Timber, paloverde, ironwood and mesquite.
 Undergrowth, cacti, catclaw & greasewood.

40.00 West, on random line, bet. secs. 30 & 31.
 Set temp. 1/4 sec. cor.
 79.79 Fall 9 lks. S. of the cor. secs. 25, 30, 31 & 36 on W.
 bdy. of Tp., which is a granite stone 5 x 10 x 8 ins.
 above ground, firmly set, mkd. 1 & 5 grooves on S.
 and N. faces, witnessed by md. of stone 4 ft. base,
 2 ft. high W. of cor. 3 ft. distant.
 Thence,
 S. 89° 56' E., on true line, bet. secs. 30 & 31.
 Over mountainous land, thru scattering timber & under-
 growth.
 Desc. 50 ft. over SE slope.
 2.55 Wash, 20 lks. wide, course SW. Asc. 56 ft. over NW slope.
 5.80 Spur, brs. SW. Desc. gradual SE slope.
 11.00 Wash, 20 lks. wide, course SW. Asc. gradual W. slope.
 16.50 Spur, brs. S. Desc. 98 ft. over SE slope.
 32.50 Enter Blue Tank Wash, course SW.
 33.50 Leave wash, asc. 211 ft. over broken NW slope to 1/4 cor.
 35.20 Intersect the SW side line of the "Ouija" patented lode
 mining claim, Min. Sur. No. 2388 bet. cors. No. 3 of
 the "Goddard No. 6" and cor. No. 2 of the "Ouija" claims, at
 5.40 chs. N. 37° W. of cor. No. 6. Across pat. min. land.
 39.79 (40.00 chs. from East) set an iron post 3 ft. long and
 1 in. in diam., 12 ins. in the ground to bedrock,
 deposit a stone mkd. with a cross (X) at base of post,
 raise a md. of stone about post for the 1/4 sec. cor. of
 secs. 30 & 31, with brass cap mkd.

Survey of
Part of the Subdivision Lines of T. 8 N., R. 4 W.

Chains

1/4 S30
S31

1929 No bearing trees available.
 Asc. 95 ft. over NW slope.
 53.40 Spur, brs. NE. Desc. 87 ft. over NE slope to wash.
 57.65 Intersect NE side line (3-4) of the "Atlantic" patented
 lode mining claim, Min. Sur. No. 2388, at 8.27 chs.
 N. 37° W., of cor. No. 4 thereof. Leave pat. mineral land.
 60.20 Wash, 20 lks. wide, course S. Asc. 85 ft. over SW slope.
 78.80 Spur, brs. S. Desc. 15 ft. over NE slope to
 79.79 Intersect the cor. secs. 29, 30, 31 and 32.

Land, mountainous.
 Soil, rocky 4th. rate.
 Timber, paloverde, mesquite and ironwood.
 Undergrowth, cacti, catclaw and greasewood.

N. 0° 03' W., on true line, bet. secs. 29 and 30.
 Over mountainous land, thru scattering timber & undergrowth.
 Asc. 92 ft. over SW slope.
 6.80 Spur, brs. SE. Desc. 134 ft. over N. slope.
 11.50 Head of wash, course E. Asc. 64 ft. over S. slope.
 16.20 Spur, brs. E. Desc. 165 ft. over N. slope.
 22.40 Wash, 10 lks. wide, course E. Asc. 78 ft. over S. slope.
 35.00 Spur, brs. E. Desc. 95 ft. over N. slope.
 40.00 True point for the 1/4 sec. cor. falls in center of Blue Tank
 Wash, 1.00 ch. wide, course West.
 Asc. gradual S. slope.
 41.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for witness cor. to 1/4 Sec. cor. of secs. 29 & 30, with
 brass cap mkd.

W C
 1/4
 S30 | S29

1929 from which,
 a palo verde, 6 ins. in diam., brs. N. 48° W., 96 lks.
 dist., mkd. WC 1/4 S30 BT
 a mesquite, 5 ins. in diam., brs. S. 66° E., 62 lks.
 dist., mkd. WC 1/4 S29 BT

Asc. 197 ft. over rolling S. slope.
 56.00 Spur, brs. W. Thence along level W. slope.
 69.00 Spur, brs. West. Desc. gradual N. slope.
 75.10 Wash, 10 lks. wide, course W. Asc. 40 ft. over S. slope to
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in
 the ground for the cor. secs. 19, 20, 29 and 30, with
 brass cap mkd.

T8N R4W
 S19 | S20
 S30 | S29

1929 from which,
 a paloverde, 4 ins. in diam., brs. N. 31 1/2° W., 89 lks.
 dist., mkd. BT only.
 a paloverde, 4 ins. in diam., brs. N. 60° E., 64 lks.
 dist., mkd. BT only.

Survey of

BOOK 8892

Part of the Subdivision Lines Of T. 8 N., R. 4 W.

Chains

a paloverde, 8 ins. in diam., brs. S.60°30'E., 87 lks. dist., mkd. T8N R4W S29 BT
a paloverde, 10 ins. in diam., brs. S.44°W., 21 lks. dist., mkd. T8N R4W S30 BT

Land, mountainous.
Soil, rocky 4th. rate.
Timber, paloverde, mesquite and ironwood.
Undergrowth, cacti, catclaw and greasewood.

40.00 S.89°57'E., on random line, bet. secs. 20 and 29.
80.08 Set temp. 1/4 sec. cor.
Fall 14 lks. S. of the reestablished cor. secs. 20, 21, 28 & 29, hereinbefore described.
Thence,
S.89°57'W., on true line, bet. secs. 20 & 29.
Over rolling land, thru scattering timber & undergrowth.
Desc. 46 ft. over NW slope.
6.40 Enter Blue Tank Wash, course SW. Over level bottom.
11.30 Leave wash, asc. 69 ft. over SE slope.
20.20 Over level bench top, brs. NE-SW.
31.80 Desc. 27 ft. over NW slope.
35.10 Wash, 10 lks. wide, course SW. Asc. gradual SE slope.
40.04 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post for the 1/4 sec. cor. secs. 20 & 29, with brass cap mkd.

1/4 S 20
S 29

1929

No bearing trees available.
43.20 Cor. falls on spur, brs. S. Desc. 27 ft. over NW slope.
Center of wash, 1 ch. wide, course SW. Asc. 44 ft. over SE slope. Enter rolling land.
47.70 Spur, brs. S. Desc. 14 ft. over SW slope.
48.90 Wash, 1 ch. wide, course S. Asc. 26 ft. over SE slope.
51.40 Thence over level bench land.
53.00 Desc. 34 ft. over NW slope.
55.30 Wash, 50 lks. wide, course SW.
71.40 Shallow wash, course SW.
80.08 Intersect the cor. secs. 19, 20, 29 and 30.

Land, rolling and mountainous.
Soil, rocky 4th. rate.
Timber, paloverde, mesquite and ironwood.
Undergrowth, cacti, catclaw and greasewood.

40.00 N.89°56'W., on random line, bet. secs. 19 & 30.
79.60 Set temp. 1/4 sec. cor.
Fall 9 lks. S. of the cor. secs. 19, 24, 25 & 30 on W. bdy. of Tp., which is a granite stone 8 x 8 x 4 ins. above ground, firmly set, mkd. 2 & 4 grooves on S. & N. faces. witnessed by md. of stone 4 ft. base, 2 ft. high W. of cor. 3 ft. dist.
Thence,
S.89°52'E., on true line, bet. secs. 19 & 30.
Over rolling land, thru scattering timber & undergrowth.
Asc. 16 ft. over NW slope.
13.70 Spur, brs. S.70°W. Desc. 37 ft. over SE slope.

Survey of

Part of the Subdivision Lines of T. 8 N., R. 4 W.

Chains

26.40 Center of wash, 1 ch. wide, course SW.
 Asc. 31 ft. over NW slope.
 30.00 Rocky spur, brs. NW. Desc. gradual NE slope.
 32.20 Bend in same large wash, from NE-NW at mouth of wash from
 SE. Asc. 70 ft. over NW slope.
 39.10 Over level spur top to
 39.60 (40.00 chs. in departure from east) set an iron post 3 ft.
 long, 1 in. in diam., 6 ins. in the ground to bedrock,
 deposit a stone mkd. with a cross (X) at base of post,
 raise a md. of stone about post for the 1/4 sec. cor.
 secs. 19 and 30, with brass cap mkd.

1/4 $\frac{S19}{S30}$

1929

No bearing trees available.
 43.45 Desc. 95 ft. over NE slope.
 53.90 Wash, 30 lks. wide, course NW. Asc. 65 ft. over SW slope.
 63.40 Spur, brs. SE. Desc. 37 ft. over NE slope.
 67.60 Wash, 10 lks. wide, course SE. Asc. gradual W. slope.
 69.60 Spur, brs. S. Desc. gradual SE slope.
 70.80 Wash, 10 lks. wide, course SW. Asc. 30 ft. over NW slope to
 79.60 Intersect the cor. secs. 19, 20, 29 & 30.

Land, mountainous.
 Soil, rocky 4th. rate.
 Timber, paloverde, mesquite and ironwood.
 Undergrowth, cacti, catclaw and greasewood.

N.0°03'W., on true line, bet. secs. 19 and 20.
 Over rolling land, thru scattering timber & undergrowth.
 Desc. gradual NW slope.
 5.30 Wash, 10 lks. wide, course SW. Asc. gradual SE slope.
 9.10 Spur, brs. SW. Desc. 34 ft. over NW slope.
 11.55 Wash, 40 lks. wide, course SW. Asc. 9 ft. over SE slope.
 15.20 Spur, brs. SW. Desc. 34 ft. over NW slope.
 24.45 Wash, 20 lks. wide, course SW. Asc. 45 ft. over SE slope.
 30.00 Spur, brs. SW. Desc. 33 ft. over NW slope.
 35.50 Wash, 10 lks. wide, course SW. Asc. 29 ft. over SE slope.
 37.00 Spur, brs. SW. Desc. 28 ft. over NW slope.
 39.70 Wash, 10 lks. wide, course SW. Asc. gradual S. slope.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in
 the ground to bedrock, deposit a stone mkd. with a
 cross (X) at base of post, raise a md. of stone about
 post for the 1/4 sec. cor. secs. 19 and 20 with brass
 cap mkd.

1/4 $\frac{S19}{S20}$

1929

No bearing trees available.
 40.90 Asc. 29 ft. over general S. slope.
 43.00 Wash, 10 lks. wide, course SE.
 Same wash, course SW. Leave rolling, enter mountainous
 land.
 45.00 Spur, brs. SW. Desc. 15 ft. over NW slope.


Survey of

BOOK 3892

Part of the Subdivision Lines of T. 8 N., R. 4 W.

Chains

- 47.60 Head of wash, course SW. Asc. 129 ft. over S. slope.
- 53.90 Spur, brs. SE. Asc. gradually along SE slope.
- 60.40 Spur, brs. SE. Desc. 31 ft. over NE slope.
- 62.25 Wash, 10 lks. wide, course E. Asc. 86 ft. over S. slope, very rough and broken.
- 73.55 Top of red bluff, 40 ft. high, brs. E-W. on ridge. Desc. 227 ft. over broken N. slope to
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 6 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post, for the cor. secs. 17, 18, 19 and 20, with brass cap mkd.




1929

No bearing trees available.

Land, rough mountainous and rolling.
 Soil, rocky 4th. rate.
 Timber, paloverde, mesquite and ironwood.
 Undergrowth, cacti, catclaw and greasewood.

- 40.00 N. 89° 57' E., on random line, bet. secs. 17 and 20. Set temp. 1/4 sec. cor.
- 80.06 Fall 7 lks. N. of the cor. secs. 16, 17, 20 & 21. Thence, West, on true line, between secs. 17 & 20. Over mountainous land, thru scattering timber & undergrowth. Desc. 46 ft. over SW slope.
- 5.00 Wash, in bend from SE to SW.
- 7.00 Same wash, course NW. Desc. 40 ft. over N. slope.
- 18.60 Same wash, course SW. Desc. 43 ft. over rolling S. slope.
- 40.03 Set an iron post 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post for the 1/4 sec. cor. secs. 17 & 20, with brass cap mkd.



1929

No bearing trees available.

- Desc. 21 ft. over SW slope.
- 45.90 Wash, 10 lks. wide, course S. Asc. 13 ft. over E. slope.
- 48.80 Short spur, brs. S. Desc. 60 ft. over SW slope.
- 63.10 Center of large wash, 1 ch. wide, course NW. Asc. 64 ft. over NE slope.
- 64.80 Spur, brs. NW. Desc. 35 ft. over SW slope.
- 69.80 Wash, 10 lks. wide, course NW. Asc. 189 ft. over rocky NE slope.
- 78.60 Rocky point, brs. NE. Desc. 39 ft. over NW slope.
- 80.06 Intersect the cor. secs. 17, 18, 19 and 20. Land, mountainous; soil, rocky 4th. rate; timber, paloverde, ironwood & mesquite; undergrowth, cacti, catclaw and greasewood.

Survey of

Part of the Subdivision Lines of T. 8 N., R. 4 W.

Chains

40.00 N. 89° 52' W., on random line, bet. secs. 18 and 19.
 79.48 Set temp. 1/4 sec. cor. on
 Fall 37 lks. N. of the cor. secs. 13, 18, 19 and 24, on
 W. hdy. of Tp., which is a granite stone 10 x 10 x 6
 ins. above ground, firmly set, mkd. 3 & 3 grooves on
 S. & N. faces witnessed by a md. of stone 4 ft. base,
 2 ft. high W. of cor. 3 ft. dist.
 Thence,
 N. 89° 52' E., on true line, bet. secs. 18 & 19.
 Over mountainous land, thru scattering timber & under-
 growth. Desc. 79 ft. over SE slope. Over pat. land.
 4.68 Intersect the SE side line, (1-2) of the "May" pat. lode
 mining claim, Min. Sur. No. 15875A, at 578 chs.
 N. 45° E., from Cor. No. 1 thereof. Leave pat. mineral
 land.
 6.45 Wash, 10 lks. wide, course SW. Asc. 67 ft. over NW slope.
 10.50 Spur, brs. SW. Desc. gradual E. slope.
 14.00 Wash, 15 lks. wide, course S. Asc. 170 ft. over W. slope.
 22.80 Spur, brs. S. Desc. 42 ft. over E. slope.
 27.00 Junction of washes, one from SE and one from N., thence
 SW. Asc. 192 ft. over SW slope.
 33.50 Head of wash, course SE. Asc. 163 ft. over SW slope.
 39.48 (40.00 chs. in departure from the cor. secs. 17, 18, 19 &
 20) set an iron post 3 ft. long, 1 in. in diam., 12
 ins. in the ground to bedrock, deposit a stone mkd.
 with a cross (X) at base of post, raise a md. of stone
 about post, for the 1/4 sec. cor. secs. 18 & 19, with
 brass cap mkd.

1/4 S 18
 S 19

1929 No bearing trees available.

40.90 Asc. 31 ft. over NW slope.
 59.20 Ridge, brs. NW-SE. Desc. 272 ft. over rough NE slope.
 71.20 Wash, near head, course NE. Asc. 77 ft. over NW slope.
 79.48 Rocky spur, brs. N. Desc. 86 ft. over NE slope to
 Intersect the cor. secs. 17, 18, 19 and 20.
 Land, mountainous.
 Soil, rocky 4th. rate.
 Timber, paloverde, ironwood and mesquite.
 Undergrowth, cacti, catclaw and greasewood.

76.90 From reestablished point for cor. of secs. 7, 8, 17 and 18,
 S. 0° 3' E. on random line, bet. secs. 17 and 18.
 Fall 18 lks. W. of cor. of secs. 17, 18, 19 and 20, Thence,
 N. 0° 11' W., on true line, bet. secs. 17 & 18.
 Over mountainous land, thru scattering timber & undergrowth.
 Desc. 211 ft. over broken NE slope.
 13.70 Wash, 20 lks. wide, course NW. Asc. 67 ft. over NW slope.
 18.30 Spur, brs. NW. Desc. 61 ft. over NE slope.
 23.60 Wash, 50 lks. wide, course NW. Asc. 165 ft. over SW slope.
 37.87 Wire fence, brs. E-W.
 38.00 Spur, brs. West. Desc. 27 ft. over N. slope.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in
 the ground to bedrock, deposit a stone mkd. with a
 cross (X) at base of post, raise a md. of stone about
 post, for the 1/4 sec. cor. secs. 17 & 18, with brass
 cap mkd.

1/4 S 18 | S 17

1929 No bearing trees available.

Survey of

Part of the Subdivision Lines of T. 8 N., R. 4 W.

BOOK 3892

chains


- 54.30 Desc. 164 ft. over NE. slope.
- 62.20 Wash, 20 lks.wide, course NW. Asc. 68 ft.over SW.slope.
- 73.50 Spur, brs. NW. Desc. 266 ft. over N. slope to
- 73.90 Enter level bed of Hassayampa River, in bend from E. to NW.
- 76.90 (3.00 chs.South from cor.point) The witness cor. to reestablished cor.of secs.7,8,17 and 18,hereinbefore described.
- Intersect true point for cor. of secs.7,8,17 and 18, in bed of Hassayampa River.

Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, paloverde,mesquite and ironwood.
 Undergrowth, cacti,catclaw and greasewood.

- 20.77 From $\frac{1}{4}$ sec.cor.of secs.5 and 6,hereinbefore described, N.0° 3'W.,on true line,bet. secs.5 and 6 (N. $\frac{1}{2}$) Over rolling land,thru scattering timber and undergrowth. Road, brs. NE.-SW.

- 34.17 Intersect the N. bdy. of the Tp.(2nd Std.Par.N.) at 13.63 chs.W. of the true point for reestablished std. $\frac{1}{4}$ sec.cor. of sec.32,T.9 N.,R.4 W.,witnessed 60 lks. E. as hereinbefore described.

At point of intersection,
 set an iron post, 3 ft. long, 2 ins.in diam.,26 ins. in the ground, for closing cor. of secs.5 and 6, with brass cap mkd.



1929

No bearing trees available.
 raise a mound of stone,4 ft.base,2 ft.high,S. of cor.

Land, rolling.
 Soil, rocky, 4th rate.
 Timber, paloverde,mesquite and ironwood.
 Undergrowth, cacti,catclaw and greasewood.

The continued satisfactory adjustment of the instrument used throughout the surveys described in the foregoing notes is indicated by field tests of same described in Book "B" of this group.

Township 8 North, Range 4 West

GENERAL DESCRIPTION.

The lands within this township lie on the SW. slope of the Wickenburg Mountains, and the surface is rolling and mountainous, with an elevation above sea level ranging from 2200 ft. in the SW. to 3500 ft. in the NE. portion.

The drainage of the greater part of the South and SE. parts is southwesterly towards the Hassayampa River in the vicinity of Wickenburg, Arizona. The North part of the Tp. drains into said river, which has a general southwesterly course, entering the Tp. on N. bdy. of sec. 3, and leaving on W. bdy. of sec. 7.

Blue Tank, Hamblin and KING Solomon Washes, are the principal tributaries of the Hassayampa River in this Tp.

The soil, except for strips along the river, is rocky, 4th rate. In the river bottom land is a 2nd rate loam.

Timber is scarce and is of the common desert variety and size, chiefly mesquite, paloverde and ironwood, with cottonwood along the river and the main washes.

Undergrowth is scattering and consists of cacti, catclaw, greasewood and ocotillo.

Water, except in the Hassayampa River, is scarce. In sec. 24, water has been developed in Blue Tank Wash, and a windmill brings water to sec. 26 in moderate quantities.

No mines are working in the Tp. at this time, but evidence of great mineral activity in days gone by is plentiful.

Settlers reside in secs. 2, 3, 5, 9, 24 and 26.

The road from Constellation to Wickenburg crosses this Tp., There are numerous other roads, but few in good condition for travel.

The lands are chiefly suitable for mining and grazing. Goats and sheep, and a very few cattle graze here at this time.

Wickenburg, Arizona, situated on the Santa Fe R.R. and the Hassayampa River, and U.S. Highway No. 89, about one mile SW. from the SW. cor. of this Tp., is the nearest railroad station and postoffice.

The Maricopa-Yavapai County boundary line bearing NW. and SE. crosses secs. 31 and 32 of this Tp., the greater part of the Tp. being in Yavapai County, Arizona.

BOOK 3892

4-680
(August, 1926)

FIELD ASSISTANTS.

to

Benjamin J. Kinsey, U.S. Surveyor

NAMES.	CAPACITY.
John Boggs	1st Chainman
McMillan Pollock	2nd Chainman
Cleo Sandy	2nd Chainman
Alvin Phillips	Cornerman
Cecil Emmons	Axman
Robert Roy	Flagman
Ura Jordan	Flagman

CERTIFICATE OF UNITED STATES SURVEYOR

I, Benjamin J. Kinsey, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer, for Group 155, Arizona bearing date of the 3rd day of October, 1928, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, RETRACED all those parts or portions of the lines of Mineral Surveys Nos. 2388 and 2719; RESURVEYED all those parts or portions of the 2nd Std. Par. N. in Rs. 3 and 4 W., East Bdy. of T. 8 N., R. 5 W., and South Bdy. and Subdivision Lines of T. 8 N., R. 4 W., and SURVEYED all those parts or portions of the South Bdy., East Bdy., and Subdivision Lines of Township 8 North, Range 4 West of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in and by diagram on page 2 hereof the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said retracement, resurvey and survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer, for Group 155, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such retracement, resurvey and survey.

Place: Phoenix, Arizona.

Date: February 10, 1930.

Benjamin J. Kinsey
 U.S. Surveyor.

APPROVAL

OFFICE OF U. S. SUPERVISOR OF SURVEYS,

Denver, Colo. January 30, 1931

The foregoing field notes of the RETRACEMENT of part of the Lines of Mineral Surveys Numbers 2388 and 2719, of the RESURVEY of the 2nd Standard Parallel North thru Ranges 3 and 4 West, Part of the East Boundary of T. 8 N., R. 5 W., Part (West half) of South Boundary of T. 8 N., R. 4 W., and Part of the Subdivision Lines of T. 8 N., R. 4 W., and of the SURVEY of the East Boundary of T. 8 N., R. 4 W., Part (Completion) of the South Boundary of T. 8 N., R. 4 W., and Part (Completion) of the Subdivision Lines of T. 8 N., R. 4 W., of the Gila and Salt River Base and Meridian, in the State of Arizona.

executed by Benjamin J. Kinsey, U.S. Surveyor

under his special instructions dated October 3, 1928, for Group 155, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the retracements, resurveys and surveys they describe, are hereby approved.

Wm. H. Brown
 U. S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above described surveys in

has been correctly copied from the original notes on file in this office.

U. S. Supervisor of Surveys.