

# FIELD NOTES

## OF THE SURVEY OF THE

South Boundary of Township 10 North, Range 4 West

and the

East Boundary and Subdivision Lines of

Township 9 North, Range 4 West

## OF THE RETRACEMENT OF

Patented Mining Claims in

T.10 N., R.4 W., T.9 N., R.3 W. &

Township 9 North, Range 4 West

## AND OF THE ALTERATION OF

Corner Monuments on the East Boundary of

Township 9 North, Range 5 West

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

### EXECUTED BY

Benjamin J. Kinsey

U.S. Surveyor

In the capacity of U. S. Surveyor, under Special Instructions dated October 3, 1928, issued by the District Cadastral Engineer to govern surveys included in Group No. 155 Arizona, which were approved by the Commissioner of the General Land Office, November 16, 1928, and Assignment Instructions dated January 5, 1929.

Survey and Retracement commenced March 28, 1929

Survey and Retracement completed May 11, 1929

Retracement of Part of Mineral Surveys Nos. 2198 & 2200, Feb. 25 & 26, 1930.


3893

3893

1A

BOOK 3893

# INDEX DIAGRAM.

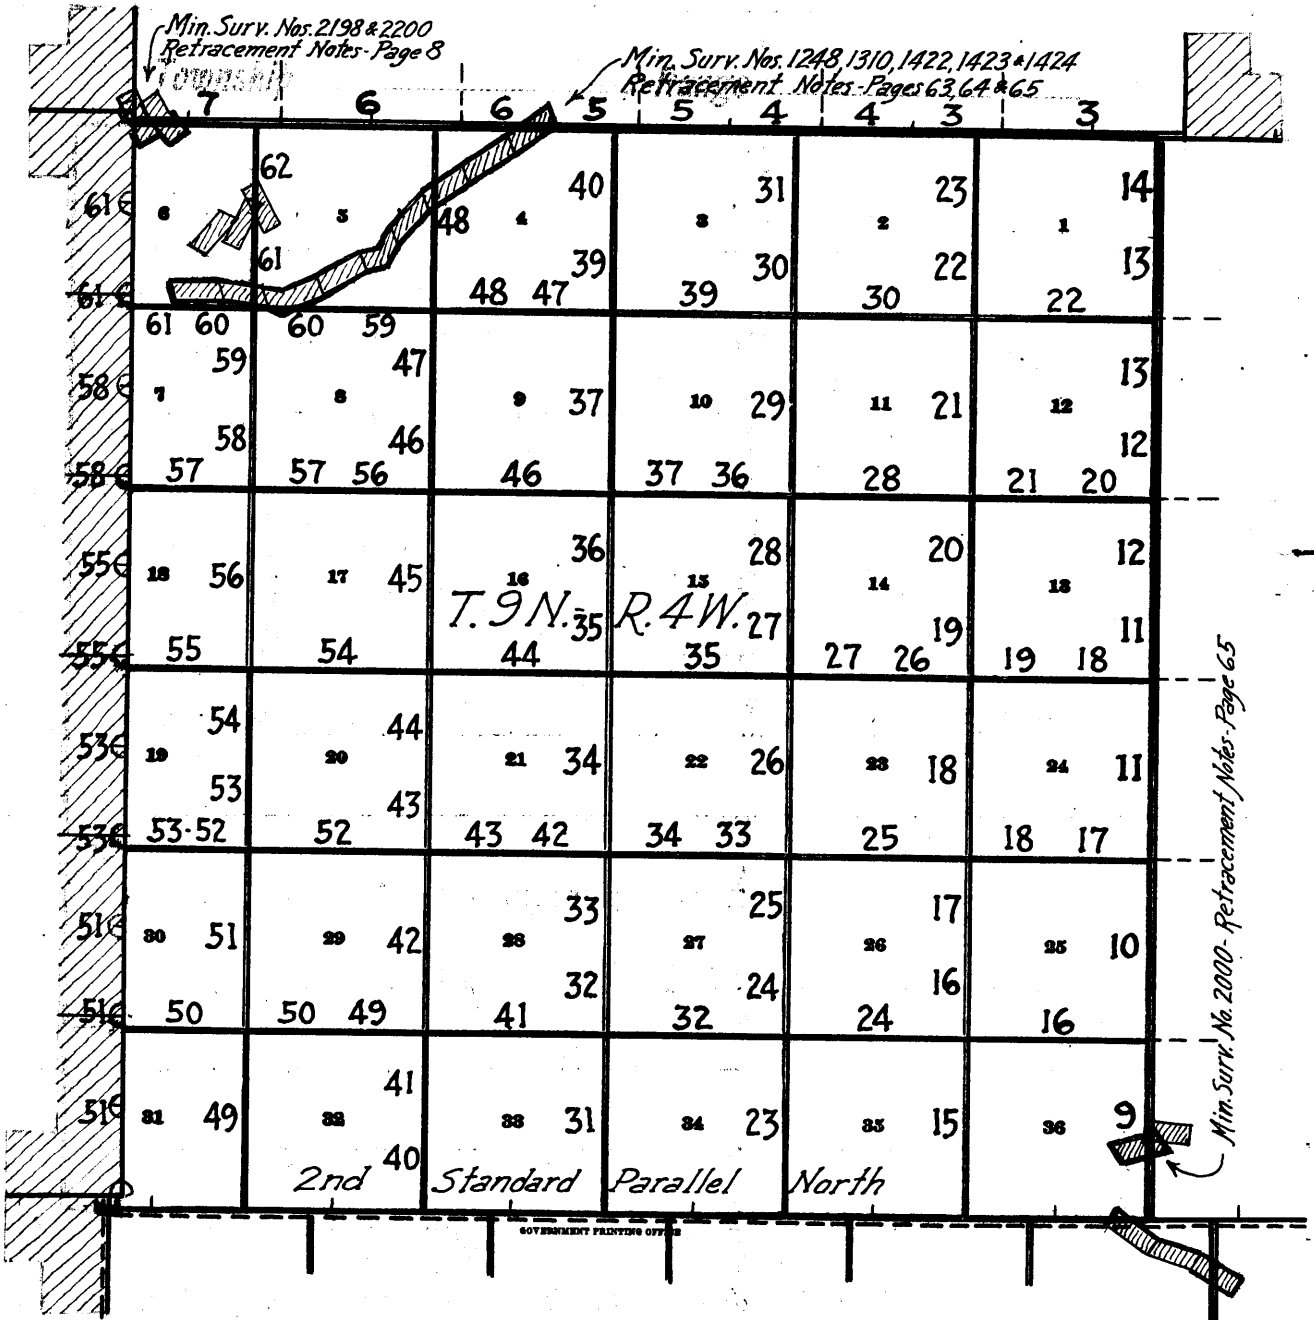


- Surveyed under this group.
- Resurveyed under this group.
- Retraced under this group.
- Unsurveyed.
- Accepted surveys.
- Accepted surveyed areas.
- Corner monuments altered under this group.

Book "B"  
Group 155 Arizona

Township 9 North, Range 4 West

DATE DIAGRAM

1929 (except where otherwise noted)

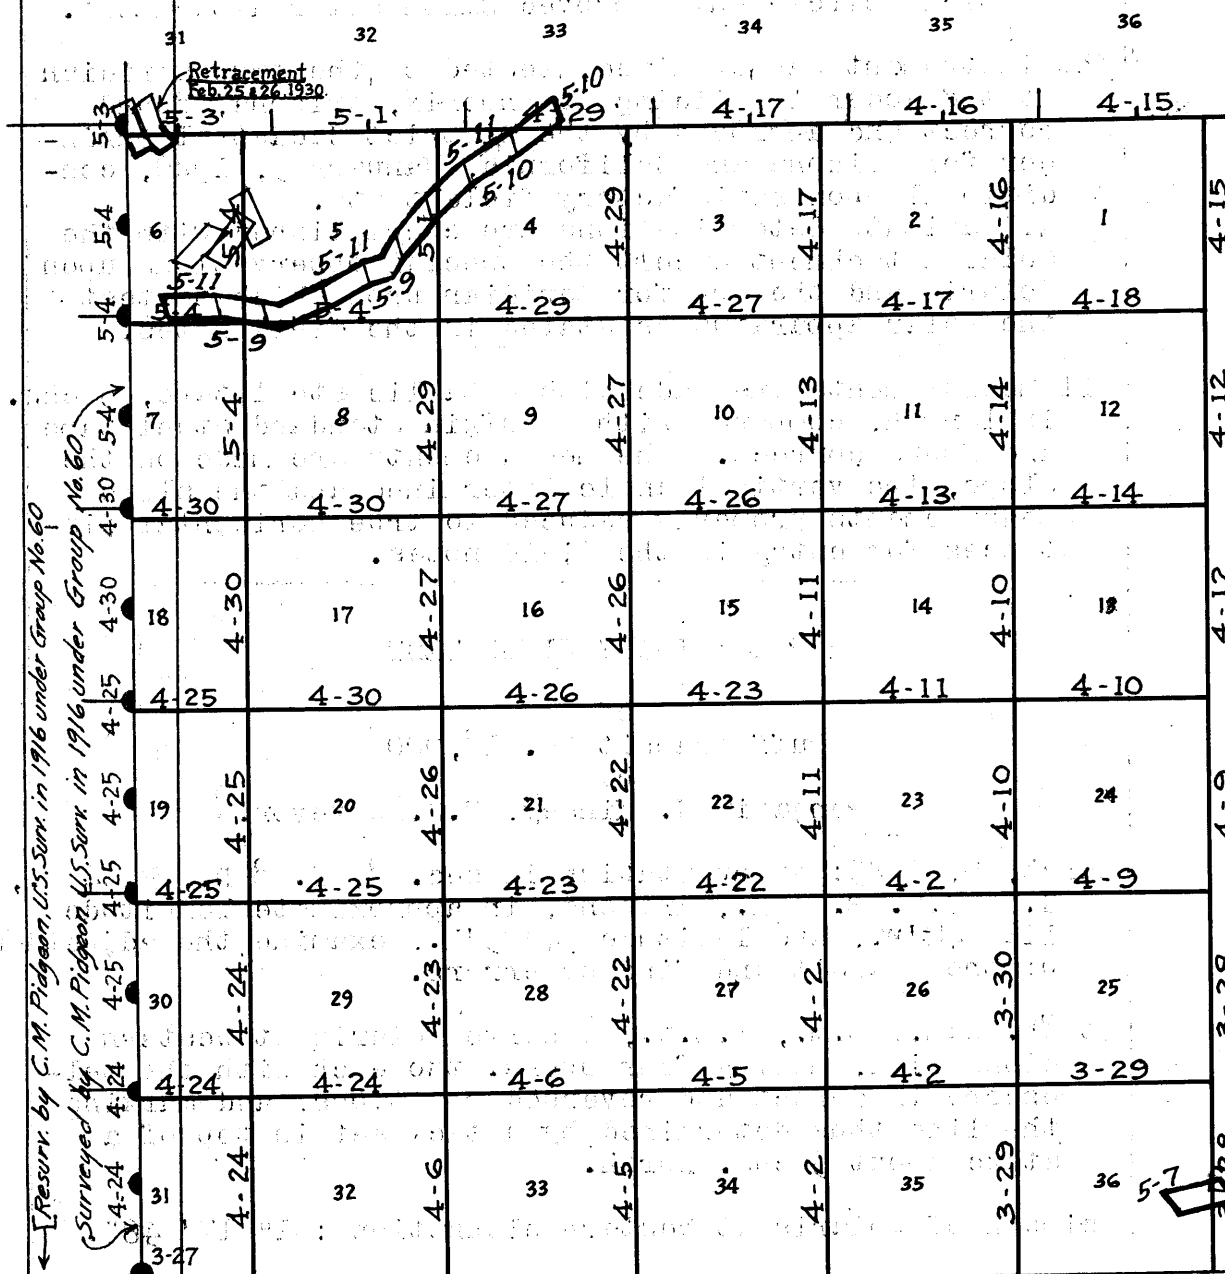

Resurveyed by C.M. Pigeon, U.S. Surveyor in 1916 under Group No. 60

Surveyed by C.M. Pigeon, U.S. Surveyor in 1916 under Group No. 60

Surveyed by G.F. Sawyer U.S. Surveyor in 1925 under Group No. 129

2nd Standard Parallel North  
Resurveyed under this group on dates shown on diagram on page 2 - Book "A"

- Retraced by Benjamin J. Kinsey, U.S. Surveyor, on dates shown in red. Notes herein.
- Surveyed by Benjamin J. Kinsey, U.S. Surveyor, on dates shown thereon. Notes herein.
- Resurveyed by Benj. J. Kinsey, U.S.S. under this group. Notes and dates in Book "A"
- Accepted surveys.
- Cor. monuments altered by Benj. J. Kinsey, U.S.S. on dates shown in green (1929) Notes herein.
- Cor. monuments altered by Benj. J. Kinsey, U.S.S. on dates shown in blue (1929) Notes in Book "A".

The surveys and retracements herein described were executed on dates shown on diagram on page 1 hereof, by Benjamin J. Kinsey, U.S. Surveyor, using a "Buff Rocky Mountain Favorite" solar transit No. 18,000, with U-shaped standards,  $4\frac{1}{2}$  inch horizontal circle, 4 inch vertical circle and improved Smith solar attachment.

The instrument was examined, tested on the true meridian at the Federal Building at Phoenix, Arizona, found correct and approved by the District Cadastral Engineer for Arizona and California, January 3, 1929, conditional upon satisfactory field tests.

All azimuth determinations are accomplished with the solar attachment except the special observations upon Polaris and the sun for meridian upon which to test the solar apparatus as stated in the field notes.

All measurements are made with a Lallie steel tape, 5 chs. in length, compared with a Lufkin standard steel tape and found correct. The measurements are made on the slope, the vertical angle determined and the slope measurements properly reduced to true horizontal distances for entry in the field notes.

#### PRELIMINARY FIELD TEST

of  
Buff transit No. 18,000  
by  
Benjamin J. Kinsey, U.S. Surveyor.

March, 9, 1929; at station in sec. 8, T. 8 N., R. 4 W., G. & S.R. B. & M., Arizona, in approximate longitude  $112^{\circ} 41\frac{1}{2}' W.$ , and latitude  $34^{\circ} 03' N.$ , examine the adjustments of the transit and find no errors.

At 8h. 22m., p.m., l.m.t., observe Polaris at western elongation, making four obsns. two each with the telescope in direct and reversed positions, and marking the line thus determined by a tack set in top of a stake about 5 chs. North.

Azimuth of Polaris at western elongation :  $1^{\circ} 17' 46''$ .

March, 10: lay off the azimuth of Polaris,  $1^{\circ} 18'$  to the east and mark the meridian thus determined by a tack set in top of a peg, driven firmly in the ground about 5 chs. North.

At 9h. 00m., a.m., app.t., with lat. arc set at  $34^{\circ} 03' N.$ , and declination arc set at  $4^{\circ} 05\frac{1}{2}' S.$ , determine a meridian with the solar which agrees with the true meridian.

At 12h. 00m., app. noon, with lat. arc unchanged, observe the sun on the meridian; the resultant reading of the decl. arc is  $4^{\circ} 02\frac{1}{2}' S.$ , which agrees with the computed declination of the sun.

At 3h. 00m. p.m. app. i., with lat. arc unchanged, set off  $3^{\circ} 59\frac{1}{2}' S.$  on the decl. arc and determine a meridian with the solar which agrees with the true meridian.

As all of the observations taken during the usual hours of solar work, agrees within 1' of the true meridian conclude that the instrument is in a satisfactory state of adjustment.


Survey of the South Bdy., of T. 10 N., R. 4 W.

Chains

The corner of Ts. 10 N., Rs. 3 and 4 W., established by G.F. Sawyer, U.S.S. in 1925, under Group 129, is an iron post 3 ins. in diam., firmly set, projecting 10 ins. above ground, with brass cap properly mkd. and witnessed by a md. of stone 3 ft. base, 1 1/2 ft. high N. of cor.

Thence, West, on true line, on S. bdy. of sec. 36., T.10 N., R.4 W. Over mountainous land, thru scattering timber and undergrowth.


- 3.40 Asc. 51 ft. over SE slope.
- 9.40 Spur, brs. S.30°W. Desc. 133 ft. over West slope.
- 29.50 Wash, 20 lks. wide, course S.30°W. Small springs of water exist in this wash.
- 40.00 Asc. 216 ft. over SE slope. Spur, about 150 lks. wide, brs. S. Desc. 120 ft. over SW slope, to Set an iron post 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post for the 1/4 sec. cor. of sec. 36 only, with brass cap mkd.




1929

No bearing trees available.

- 51.40 Desc. 260 ft. over SW slope. Wash, 20 lks. wide, course S. Small stream of water in center. Asc. 42 ft. over E. slope.
- 54.30 Spur, brs. S. Desc. 136 ft. over SW slope.
- 64.25 Wash, 30 lks. wide, course S.20°W. Asc. 27 ft. over E. slope.
- 66.00 Spur, brs. S. Desc. 19 ft. over W. slope.
- 69.60 Wash, 30 lks. wide, course S.20°E. Asc. 52 ft. over E. slope.
- 73.90 Spur, brs. SE. Desc. gradual SW slope.
- 77.50 Small wash, 5 lks. wide, course SE. Asc. 51 ft. over NE slope to
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., on bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post, for the cor. of secs. 35 and 36, with brass cap mkd.



S1



1929

No bearing trees available.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, cottonwood in washes; on slopes mesquite and small oaks.  
 Undergrowth; oakbrush, manzanita, catclaw and cacti.

West, on true line, on S. bdy. of sec. 35.  
 Over mountainous land, thru scattering timber & undergrowth.  
 Asc. 190 ft. over E. slope.

## Survey of the South Bdy. of T.10 N., R. 4 W.

## Chains

7.50 Spur, brs. S.45°E. Desc. 75 ft. over SW slope.  
 10.40 Wash, 20 lks. wide, course S.50°E.  
 Asc. 351 ft. over rough, brushy East slope.  
 15.00 Slopes change to NE.  
 20.30 Spur, brs. S.80°E. Asc. 32 ft. over SE slope.  
 23.70 Ridge, brs. N-S. Desc. 116 ft. over SW slope to  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 10 ins. in the  
 ground to bedrock, deposit a stone mkd. with a cross  
 (X) at base of post, raise a md. of stone about post  
 for the  $\frac{1}{4}$  sec. cor. sec. 35, with brass cap mkd.

 $\frac{1}{4}$  S35

1929

No bearing trees available.

Desc. 18 ft. over SW slope.  
 41.70 Wash, 20 lks. wide, course S. Asc. 169 ft. over SE slope.  
 58.10 Spur, brs. S. Desc. 63 ft. over SW slope.  
 61.75 Wash, 10 lks. wide, course S. Asc. 191 ft. over SE slope.  
 75.00 Divide, brs. NE-SW. Desc. 60 ft. over NW slope to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in  
 the ground to bedrock, deposit a stone mkd. with a  
 cross (X) at base of post, raise a md. of stone about  
 post for the cor. secs. 34 and 35, with brass cap mkd.

T10N	R4W
S34	S35

S 2

T10N R4W

1929

No bearing trees available.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, scrub oak and mesquite.  
 Undergrowth, oakbrush, catclaw, manzanita, laurel & cacti.

West, on true line, on S. Bdy. of sec. 34.  
 Over mountainous land, thru scattering timber and dense  
 undergrowth.

Desc. gradual NW slope.  
 5.00 Wash, 10 lks. wide, course N. Asc. gradual NE slope, 40 ft.  
 12.20 Spur, brs. N. Desc. 34 ft. over NW slope.  
 15.35 Wash, 10 lks. wide, course N. Asc. 20 ft. over NE slope.  
 16.35 Spur, brs. N. Desc. 20 ft. over NW slope.  
 18.30 Wash, course N. Asc. 96 ft. over NE slope.  
 25.20 Spur, brs. N. Desc. 17 ft. over W. slope.  
 31.10 Wash, 10 lks. wide, course N. Asc. 40 ft. over NE slope.  
 32.30 Spur, brs. N. Desc. gradual W. slope.  
 37.10 Wash, near head, course N. Asc. 40 ft. over NE slope.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 8 ins. in  
 the ground to bedrock, deposit a stone mkd. with a  
 cross (X) at base of post, raise a md. of stone about  
 post for the  $\frac{1}{4}$  sec. cor. sec. 34 with brass cap mkd.

Survey of the South Bdy. of T. 10 N., R. 4 W.

Chains

1/4 S 34

1929

No bearing trees available.

Asc. 54 ft. over E. slope.

48.60

Divide, brs. N. and SE. Desc. 66 ft. over West slope.

54.50

Wash, 10 lks. wide, course NW. Asc. 75 ft. over NE slope.

75.50

Spur, brs. N. 70° W., Desc. 342 ft. over SW slope to

80.00

Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in the ground for the cor. of secs. 33 and 34, with brass cap mkd.

TION | R4W  
S33 | S34

S 3

T9N | R4W

1929

No bearing trees available.

Raise a md. of stone 3 ft. base, 2 ft. high N. of cor.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, paloverde, mesquite and scruboak.

Undergrowth, oakbrush, manzanita, catclaw, laurel & cacti.

West, on true line, on S. Bdy. of sec. 33.

Over mountainous land, thru scattering timber and dense undergrowth.

Desc. 290 ft. over broken W. slope.

10.50

Wash, 20 lks. wide, course SW. Asc. 120 ft. over SE slope.

14.31

Rocky spur, brs. S.W. Desc. 135 ft. over NW slope.

19.35

Wash, 10 lks. wide, course SW. Asc. 35 ft. over SE slope.

25.41

Rocky spur, brs. SW. Desc. 124 ft. over NW slope.

29.41

Rocky gulch, course SW. Asc. 67 ft. over SE slope.

30.30

Spur, brs. S. Desc. 89 ft. over SW slope.

32.10

Wash, 10 lks. wide, course SE. Asc. 187 ft. over E. slope.

35.00

Trail, brs. NW-SE.

40.00

Spur, brs. SE. Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the 1/4 sec. cor. sec. 33, with brass cap mkd.

1/4 S33

1929

No bearing trees available; raise a md. of stone 4 ft. base, 2 ft. high N. of cor. 3 ft. distant.

Desc. 190 ft. over SW slope to wash.

42.50

Intersect the SE side-line (1-2) of the "Golden Age" pat. lode mining claim, Min. Sur. No. 1422, at 3.39 chs, S. 54° 23' W. of cor. No. 2 thereof. Thence across pat. mineral land.

49.70

Road, brs. N-S. Road ends to SE about 5 chs. where trail to East begins, two small frame houses here. Road to N. about 3 chs. to mine tunnel.

51.30

Wash, 20 lks. wide, course S. Asc. 132 ft. over SE slope.

52.45

Road, brs. NE-SW.

57.11

Intersect the NW side line (3-4) of the "Golden Age" pat. lode claim, Min. Sur. No. 1422 at 4.50 chs. N. 54 1/2° E. of Cor. No. 4 thereof. Leave pat. mineral land.

Survey of the South Bdy. of T. 10 N., R. 4 W.

Chains

60.30 Spur, brs. SW. Desc. 222 ft. over SW slope to wash.  
 65.04 Same road, brs. N-S.  
 68.20 Wash, near head, course S. Asc. 40 ft. over SE slope.  
 73.91 Same road, brs. NE-SW.  
 74.50 Spur, brs. S. Asc. gradual SE slope to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 16 ins. in  
 the ground to bedrock, deposit a stone mkd. with a  
 cross (X) at base of post, raise a md. of stone about  
 post for the cor. secs. 32 & 33, with brass cap mkd.

T10N	R4W
S32	S33

T9N R4W  
S 4

1929

No bearing trees available.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde, mesquite.  
 Undergrowth, cacti, catclaw, oakbrush & manzanita.

West, on true line, on S. Bdy. of sec. 32.  
 Over mountainous land, thru scattering timber & undergrowth.  
 Asc. gradual SE slope.

3.50 Ridge, brs. NE-SW. Desc. 379 ft. over NW slope.  
 25.30 Wash, 10 lks. wide, course NW. Asc. 30 ft. over NE slope.  
 29.70 Spur, brs. N. Desc. 84 ft. over NW slope.  
 35.20 Wash, 10 lks. wide, course NW. Asc. 120 ft. over NE slope.  
 38.70 Road, brs. NW-SE.  
 40.00 Spur, brs. N. Set an iron post 3 ft. long, 1 in. in diam.,  
 10 ins. in the ground to bedrock; deposit a stone mkd.  
 with a cross (X) at base of post; raise a md. of stone  
 about post, for the  $\frac{1}{4}$  sec. cor. sec. 32 with brass cap  
 mkd.

$\frac{1}{4}$  S 32

1929

No bearing trees available.

Asc. 52 bft. over N. slope.  
 60.00 Spur, brs. N. Desc. 279 ft. over NW slope.  
 72.50 Wash, 10 lks. wide, course NW.  
 Continue on slight desc. over NW slope to main wash, 64 ft.  
 73.30 Pipe line, brs. N-S.  
 74.10 Road, brs. NE-SW.  
 75.00 Weaver Wash, 50 lks. wide, course SW. Asc. gradually  
 along SE slope.  
 76.00 Top of wash, banks brs. NE-SW. mining activities,  
 78.00 Across level bench top to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 16 ins. in  
 the ground to bedrock, deposit a stone mkd. with a  
 cross (X) at base of post, raise a md. of stone about  
 post for the cor. secs. 31 & 32, with brass cap mkd.

T10N	R4W
S31	S32

S 5

T9N R4W

1929



Survey of the South Bdy. of T. 10 N., R. 4 W.

Chains

No bearing trees available.

Land, mountainous and rolling.  
 Soil, rocky 4th. rate.  
 Timber, paloverde, mesquite and ironwood.  
 Undergrowth, cacti, catclaw and greasewood.


West, on true line, on S. Bdy. of sec. 31.  
 Over mountainous land, thru scattering timber and undergrowth.  
 Desc. slight West slope.  
 2.70 Wash, 30 lks. wide, crs. S. Asc. 606 ft. over NE slope.  
 40.00 Set an iron post 3 ft. long, 1 in in diam., on bedrock, deposit an iron chisel 6" long at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 31, with brass cap mkd.

1/4 S 31

1929 No bearing trees available.

43.02 Asc. 200 ft. over broken NE slope.  
 Spur, brs. SE; intersect the NE side line of the "Clinton" (3-4) pat. mining claim, at 2.22 chs. S. 36°26'E., of cor. No. 3 thereof. Across patented land.

45.00 Asc. 60 ft. up spur.  
 40.00 Lv. spur, from NW., along broken S. slope.  
 61.31 Desc. 325 ft. over SW slope to intersect W. Bdy. of Tp., at 2.44 chs. S. of the cor. of Ts. 9 and 10 N., Rs. 3 and 4 W., established in 1916, which is an iron post 3 ins. in diam., firmly set and projecting 18 ins. above ground, and mound of stone, with brass cap properly marked.  
 Alter this cor. monument to refer to Ts. 9 and 10 N., R. 5 W., only, by changing markings on brass cap to read



At intersection set a granite stone, 10 x 12 x 30 ins., 16 ins. in the ground, in a mound of stone, mkd. 6 grooves on S-E-N faces, and CC on E. face. (No 3 in. post available.) Deposit a steel chisel 8 in. long, alongside cor. stone, for the closing cor. No. 3 of Ts. 9 and 10 N., R. 4 W., No bearing trees available.

Land, mountainous and rolling.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and ironwood.

## Retracements of Part of Mineral Surveys Nos. 2198 &amp; 2200.

Chains

MAMIE & CLINTON pat.lode claims in  
secs. 6 and 31, Ts. 9-10 N., R.4 W.

Cor. No. 3 of the Clinton claim is a cross (X) cut on  
bedrock and C-No. 3-2200 cut alongside and mound of  
stones alongside.

Thence,

S. 36° 26' E., on true line, towards flag visible on Cor. 4.

2.22 Intersect S. bdy. of sec. 31, T. 10 N., R. 4 W., hereinafter  
Continue line and measurement.

9.96 Intersect Cor. No. 4, which is a stone 8 x 12 x 18 ins.  
firmly set, properly marked.

Thence, S. 53° 34' W., on true line on SE end line of claim  
towards flag visible on Cor. No. 5.

9.06 Intersect Cor. No. 5 which is cross (X) cut on bedrock,  
and proper marks cut alongside.

Thence, N. 36° 26' W., on SW side line of the Clinton.

3.90 Intersect the SE end line of the Mamie pat. lode mining  
claim at 14 lks. S. 59° 10' W., of Cor. No. 3 thereof.

Thence,

S. 59° 10' W., on true line, on SE end line of the Mamie  
(Min. Sur. No. 2198.)

9.08 Intersect Cor. No. 4 which is a cross (X) cut on bedrock  
with proper marks alongside.

Thence, N. 30° 14' W., on true line, towards flag visible on  
Cor. No. 1, on the SW side line of claim.

10.70 Intersect the W. Bdy. of T. 9 N., R. 4 W., at 3.78 chs.  
South of the closing cor. of secs. 6 and 31.

Survey of the East Boundary of T. 9 N., R. 4 W.

Chains

From the reestablished standard cor. of Ts. 9 N., Rs. 3 & 4 W., on 2nd. Std. Par. No. described in Book "A", this group.

North, on true line, bet. secs. 31. and 36.

Over mountainous land, thru scattering timber & undergrowth.

Asc. 35 ft. over gradual SW. slope.

5.30 Spur, brs. W. Desc. 15 ft. over NW slope.

10.10 Wash, 10 lks. wide, course W. Asc. 23 ft. over SW slope.

17.50 Spur, brs. NW. Desc. 125 ft. over NE slope.

21.95 Wash, 20 lks. wide, course W. Asc. 16 ft. over SW slope.

23.40 Spur, brs. NW; about 30 lks. west to small knoll about 30 ft. in diam. Desc. 105 ft. over NE slope to river.

27.21 Intersect the SE side-line (1-4) of the "Black Warrior" patented lode mining claim, Min. Sur. No. 2000 at 7.20 chs. S. 75° 21' W., of Cor. No. 4 thereof.

Thence across pat. min. land.

33.56 From which, house on east end of row of several, brs. S.W., 70 lks. dist. These houses are part of the White Mining Camp.

34.87 Road, brs. NW-SE. A small house brs. NW. 70 lks. dist. another house brs. S.W. 100 lks. dist.

37.30 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for witness cor. to 1/4 sec. cor. of secs. 31 and 36, with brass cap mkd. with brass cap mkd.

W C  
1/4

S36	S31
-----	-----

1929. from which,

a willow, 20 ins. in diam., brs. N. 0 1/2° E., 220 lks. dist., mkd. WC 1/4 S31 BT

a willow, 20 ins. in diam., brs. N. 8 1/4° W., 210 lks. dist., mkd. WC 1/4 S36 BT

Desc. slight N. slope.

38.20 Enter river bottom at mouth of canyon from SE.

39.90 Intersect W. end line (1-2) of "Little Chief" patented lode mining claim, Min. Surv. No. 2000, at 2.80 chs. S. 6° 13' W. from Cor. No. 2 thereof. Leave patented mineral land.

40.00 In the points for 1/4 sec. cor. of secs. 31 & 36, in Hassayampa River, with stream of water 30 lks. wide; 6 ins. deep, course W. It being impracticable to monument the cor. here, establish witness cor. 2.70 chs. S.

41.50 Leave river bottom, brs. E-W.; asc. 98 ft. over S. slope.

47.15 Top of ascent; across level spur top, brs. E.

51.10 Leave spur, desc. 76 ft. over NE slope.


54.30 Foot of descent; enter bottom of river, brs. NW-SE.

56.00 Hassayampa River; stream of water 20 lks. wide, 6 ins. deep, course SE.

56.30 Leave river bottom, brs. NW-SE. Asc. 237 ft. over broken SW slope.

67.80 Spur, brs. NW. Desc. 230 ft. over NE slope.

80.00 About 20 ft. above river bottom, set an iron post 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post, for the cor. of secs. 25, 30, 31 and 36, with brass cap mkd.



1929 from which,

Survey of the East Boundary of T. 9 N., R. 4 W.

Chains

a mesquite, 4 ins. in diam., brs. N. 68° W., 28 lks. dist., mkd. BT. only

a mesquite, 6 ins. in diam., brs. N. 82° E., 37 lks. dist., mkd. BT. only.

No other bearing trees available.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, paloverde, mesquite, ironwood, on slopes; along river is found willow and cottonwood.

Undergrowth, cacti, catclaw and greasewood & arrowweed.

North, on true line, bet. secs. 25 and 30.

Over mountainous land, thru scattering timber & undergrowth.

Desc. 20 ft. over N. slope.

0.50 Enter river bottom, brs. NE-SW.

2.45 Hassayampa River, stream of water, 20 lks. wide, 6 ins. deep, course SW.

3.00 Leave bottom, brs. NE-SW. Asc. 244 ft. over rough S. slope to spur.

5.00 Mouth of small ravine, course SW.

10.50 Rocky spur, brs. SE. Desc. 23 ft. over NE slope.

14.75 Same ravine, course SE. Asc. 155 ft. over SW slope.


20.45 Rocky spur, brs. W. Desc. 18 ft. over NW slope.

22.40 Same ravine, course SW. (near hd.) Asc. 136 ft. over steep SW slope.

28.20 Spur, brs. SE. Continue ascent of 88 ft. along E. slope.

33.00 Branch spur, brs. E. Top of main spur, bears W. about 1 ch. dist. Desc. 116 ft. over NE slope to

40.00 Set an iron post 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post, for the 1/4 sec. cor. of secs. 25 and 30, with brass cap mkd.



1929

No bearing trees available.

Desc. gradual NE slope..

42.00 Head of wash, course E. Asc. 126 ft. over SE slope.


46.00 Narrow, rocky spur, brs. SW. Along level west slope of same.

48.00 Spur, brs. SE. (Same spur.) Desc. 242 ft. over NE slope.

68.10 Wash, 20 lks. wide, course NE. Asc. 42 ft. over SE slope.

73.70 Short spur, brs. NE. Desc. 41 ft. over NW slope to

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post for the cor. secs. 19, 24, 25 and 30, with brass cap mkd.




1929

No bearing trees available.


Survey of the East Boundary of T. 9 N., R. 4 W.

Chains

North, on true line, bet. secs. 19 and 24.  
 Over mountainous land, thru scattering timber & undergrowth.  
 Asc. 32 ft. over SE slope.  
 3.30 Spur, brs. E. Across level top.  
 8.30 Desc. 235 ft. over NE slope.  
 20.00 Wash, 30 lks. wide, course NE. Asc. 23 ft. over SE slope.  
 26.50 Spur, brs. NE. Desc. 116 ft. over N. slope.  
 28.80 Wash, (center) 150 lks. wide, course SE. Asc. 192 ft.  
 over rocky south slope to  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in  
 the ground to bedrock, deposit a stone mkd. with a  
 cross (X) at base of post, raise a md. of stone about  
 post for the  $\frac{1}{4}$  sec. cor. of secs. 19 and 24, with brass  
 cap mkd.




No bearing trees available.  
 Asc. 173 ft. over steep, rocky S. slope.  
 49.00 Spur, brs. E. Desc. 91 ft. over NE slope.  
 61.30 Wash, 10 lks. wide, course SE. Asc. 121 ft. over SW slope.  
 64.45 Spur, brs. SE. Desc. 68 ft. over NE slope.  
 72.30 Wash, 20 lks. wide, course E. Asc. 116 ft. over SE slope to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in  
 the ground to bedrock, deposit a stone mkd. with a  
 cross (X) at base of post, raise a md. of stone about  
 post, for the cor. secs. 13, 18, 19 and 24, with brass  
 cap mkd.



1929  
 No bearing trees available.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde, and mesquite.  
 Undergrowth, cacti and catclaw.

North, on true line, bet. secs. 13 and 18.  
 Over mountainous land, thru scattering timber & under-  
 growth.  
 Asc. 57 ft. over S. slope.  
 4.65 Spur, brs. E. (on W. side of saddle.)  
 Desc. 40 ft. over N. slope.  
 10.60 Small wash, course NE. Asc. gradual SE slope.  
 13.90 Short spur, brs. E. Desc. 46 ft. over NE slope.  
 14.40 Wash, 10 lks. wide, course E. Asc. 41 ft. over S. slope.  
 22.80 Spur, brs. E. Desc. 68 ft. over N. slope.  
 26.00 Wash, 20 lks. wide, course E. Asc. 164 ft. over SE slope.  
 36.00 Short spur, brs. E. Desc. 15 ft. over E. slope.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in  
 the ground to bedrock, deposit a stone mkd. with a  
 cross (X) at base of post, raise a md. of stone about  
 post, for the  $\frac{1}{4}$  sec. cor. of secs. 13 and 18, with  
 brass cap mkd.




No bearing trees available.

Survey of the East Boundary of T. 9 N., R. 4 W.

Chains

Desc. 50 ft. over NE slope.  
 41.40 Wash, 20 lks. wide, course SE. Asc. 46 ft. over SW slope.  
 45.95 Spur, brs. S.70°E. Desc. 21 ft. over gradual NE slope.  
 55.55 Enter wash, course S.30°E. Asc. gradually up same.  
 58.00 Leave wash, from N.70°W. Asc. 356 ft. over general S.  
       slope to cor.  
 65.40 Spur, brs. S.30°E.  
 71.00 Cross same spur, brs. S.10°W.  
 74.50 Top of same spur, brs. S.10°E.  
       Asc. along SE slope to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 6 ins. in  
       the ground to bedrock, deposit a stone mkd. with a cross  
       (X) at base of post, raise a md. of stone about post  
       for the cor. secs. 7, 12, 13 and 18, with brass cap  
       mkd.



1929


No bearing trees available.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, mesquite and small willows.  
 Undergrowth, cacti and catclaw.

North, on true line, bet. secs. 7 and 12.  
 Over mountainous land, thru scattering timber & under-  
 growth.

Asc. 58 ft. over S. slope.  
 3.00 Spur, brs. S. 20°W. Desc. slight NW slope.  
 5.00 Head of wash, course SW; asc. 54 ft. over SE slope.  
 7.70 Spur, brs. S.10°W. Desc. 28 ft. over NW slope.  
 11.00 Head of wash, course S.30°W. Asc. 25 ft. over SE slope.  
 14.50 Ridge, brs. E-W. Desc. 206 ft. over NE slope.  
 29.20 Small wash, course NE. Asc. 20 ft. over SE slope.  
 35.20 Small spur, brs. E. Desc. 52 ft. over NW slope.  
 38.50 Wash, 10 lks. wide, course E. Asc. gradual SE slope to  
       head spur, brs. E. as the true point farther. Fall in  
 39.00 Short spur bears E. hereinafter described. Set an iron  
       post, 3 ft. long, 1 in. in diam., 18 ins. in the ground  
       to bedrock, deposit a stone mkd. with a cross (X) at  
       base of post, raise a md. of stone about post, for  
       witness cor. to the 1/4 sec. cor. of secs. 7 & 12, with  
       brass cap mkd.

W C



1929


Nonbearing trees available.

Desc. 24 ft. over N. slope.  
 40.00 True point for the 1/4 sec. cor. of secs. 7 & 12, falls in  
       wash, 10 lks. wide, course NE, where it is impractic-  
       able to monument the cor. Witness cor. established at  
       1.00 ch. South, as hereinbefore described.

Survey of the East Boundary of T. 9 N., R. 4 W.

Chains

Asc. gradually over SE slope.  
 46.45 Spur, brs. NE. Desc. 68 ft. over NW slope.  
 55.65 Wash, 10 lks. wide, course W. Asc. gradual S. slope.  
 59.00 Spur, brs. S. 80°W. Desc. 29 ft. over NW slope.  
 64.00 Wash, 30 lks. wide, course S. 20°W. (At junction with washes from SE and NE.) Asc. 57 ft. over SE slope.  
 67.50 S. edge of flat topped spur, brs. SW.  
 75.50 N. edge of spur. Desc. 40 ft. over NW slope.  
 78.90 Wash, 40 lks. wide, course S. 30°W. Asc. gradual SE slope.  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post for the cor. secs. 1, 6, 7 and 12, with brass cap mkd.



1929

No bearing trees available.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, mesquite.  
 Undergrowth, cacti, catclaw and crucifixion brush.

North, on true line, bet. secs. 1 and 6.  
 Over mountainous land, thru scattering timber & undergrowth.  
 Asc. 124 ft. over S. slope.  
 7.15 Spur, brs. NW. Desc. 60 ft. over NW slope.  
 14.50 Wash, 15 lks. wide, course S. 45°W. Asc. 56 ft. over S. slope.  
 17.10 Slope changes to E. slope; desc. gradually over NE slope.  
 26.60 Head of wash, course SE. Asc. gradual SW slope.  
 29.50 Spur, brs. S. 80°W. Desc. 33 ft. over NW slope.  
 35.00 Wash, 30 lks. wide, course SW. Asc. 129 ft. over SE slope.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 8 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post for the 1/4 sec. cor. of secs. 1 and 6, with brass cap mkd.



1929

No bearing trees available.


Asc. 34 ft. over SE slope.  
 45.25 Spur, brs. S. 30°W. Desc. 14 ft. over NW slope.  
 51.50 Head of wash, course S. 20°W. Asc. 269 ft. over S. slope.  
 61.20 Spur, brs. S. 20°E. Asc. gradually along spur top.  
 71.20 Leave spur, to NE. Desc. 45 ft. over NW slope.  
 76.30 Wash, 20 lks. wide, course S. 30°W. Small spring on line.  
 Asc. 67 ft. over SE slope to

Survey of the East Boundary of T. 9 N., R. 4 W.

Chains

80.70

Intersect the South bdy. of sec. 36, T.10 N., R.4 W., at 11.31 chs. West of the cor. of Ts. 10 N., Rs. 3 and 4 W., hereinbefore described.  
At intersection, set an iron post 3 ft. long, 3 ins. in diam., 14 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the closing cor. of sec. 36, T.10 N., R.4 W., with brass cap mkd.



No bearing trees available.

Land, mountainous.  
Soil, rocky 4th. rate.  
Timber, cottonwood along creeks & washes, small oaks.  
Undergrowth, oakbrush and cacti.

Boundaries of Township 9 North, Range 4 West.

Latitudes, departures and closing errors.

Lines designated	True Course	Dist.	Latitudes		Departures	
			N.	S.	E.	W.
South boundary (2nd. Std. Par. N.)	West	452.26				452.26
West boundary	North	2.44	2.44			
	N. 89° 53' E., 2.11				2.11	
	North	477.56	477.56			
North boundary	East	450.00			450.00	
East boundary	South	480.70		480.70		
Convergency					.46	
Totals			480.00	480.70	452.57	452.26
				480.00	452.26	
	Error in latitude:		0.70			
	Error in departure:				0.31	



Survey of the Subdivision Lines of T.9 N., R.4 W. BOOK 3893

Chains

From the reestablished std. cor. of secs. 35 & 36 on S. Bdy. of Tp. (2nd Std. Par. N.), described in Book "A", N.0° 01' W., on true line, bet. secs. 35 & 36. Over mountainous land, thru scattering timber & undergrowth.

Desc. 80 ft. over gradual N. slope.

3.00 Foot of desc., continue over rolling N. slope.

10.95 Road, brs. NE-SW.

14.65 Wash, 10 lks. wide, course W for 150 lks. thence N.

17.80 Edge of rolling land, brs. E-W. desc. 124 ft. over N. slope.

19.50 Enter bottom of the Hassayampa River, brs. E-W. Across sandy bottom.

21.00 Hassayampa River, stream of water, 30 lks. wide, 6 ins. deep, course West.

25.50 N. edge of bottom land, brs. E-W. Asc. 277 ft. over S. slope.


26.70 Wire fence, brs. E-SW. Continue ascent of 277 ft. over

28.95 Old wooden flume, brs. E-W.

33.30 Spur, brs. SE. Desc. 16 ft. over NE slope to 1/4 sec. cor.

33.34 Power line, brs. SE-NW. 1/4 sec. cor. NE slope.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post, for the 1/4 sec. cor. secs. 35 & 36, with brass cap mkd.



No bearing trees available.

Desc. 54 ft. over NE slope.

44.90 Wash, 20 lks. wide, course SE. Asc. 16 ft. over SW slope.

49.10 Short spur, brs. SE. Desc. 16 ft. over NE slope.


50.40 Wash, 10 lks. wide, course SE. about 2 chs. to junction of washes from N. and E., thence S. Asc. 130 ft. over SW slope.

56.20 Short spur, brs. SE. Asc. 104 ft. over SW slope.

66.00 Short spur, brs. E. Desc. 87 ft. over NE slope.

72.05 Wash, 20 lks. wide, course SE. Asc. 70 ft. over SW slope.

80.00 Set an iron post 3 ft. long; 2 ins. in diam., 14 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post, for the cor. of secs. 25, 26, 35 and 36, with brass cap mkd.



No bearing trees available.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, cottonwood and willow along river bottom.  
 Undergrowth, paloverde & cacti.

-----

East, on random line, bet. secs. 25 and 36.


40.00 Set temp. 1/4 sec. cor.

79.96 Intersect the cor. of secs. 25, 30, 31 and 36 on E. Bdy. of Tp., hereinbefore described.

East, on random line, bet. secs. 25 and 36.

Survey of the Subdivision Lines of T. 9 N., R. 4 W.

Chains	
	Thence, West, on true line, bet. secs. 25 and 36. Over mountainous land, thru scattering timber & undergrowth. Desc. 31 ft. over NW slope.
8.20	Enter bottom of river. brs. NE-SW.
10.40	Hassayampa River, stream of water 50 lks. wide, 4 ins. deep, course SW.
12.60	Leave river bottom, asc. 373 ft. over steep East slope.
25.90	Spur, brs. S. Desc. 106 ft. over SW slope.
32.70	Wash, 20 lks. wide, course SW. Asc. 81 ft. over E. slope.
39.98	Set an iron post 3 ft. long, 1 in. in diam., 15 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post for the $\frac{1}{4}$ sec. cor. of secs. 25 and 36, with brass cap mkd.




1929.

	No bearing trees available. Asc. 171 ft. over NE slope.
47.30	Spur, brs. S. Desc. 171 ft. over NW slope.
56.80	Wash, 20 lks. wide, course SW. Asc. 15 ft. over SE slope.
58.20	Spur, brs. SW. Desc. 92 ft. over SW slope.
63.50	Wash, 20 lks. wide, course S. (about 6 chs. S. to junc- tion with wash from NE.) Asc. 61 ft. over E. slope.
65.70	Spur, brs. S. Desc. 59 ft. over SW slope.
67.80	Wash, 20 lks. wide, course S. Asc. 204 ft. over E. slope
73.00	Rocky point, brs. North. Desc. gradual SW slope to
79.96	The cor. of secs. 25, 26, 35 and 36.

Land, mountainous.  
Soil, rocky 4th. rate.  
Timber, Paloverde on slopes, cottonwood & willow along  
river bottom.  
Undergrowth, cacti, catclaw and greasewood.

	N.0° 01'W., on true line, bet. secs. 25 and 26. Over mountainous land, thru scattering timber & under- growth. Asc. 19 ft. over SW slope.
1.00	Spur, brs. SE. Desc. 56 ft. over NE slope.
3.00	Wash, 10 lks. wide, course SE. Asc. 199 ft. over SW slope.
21.60	Spur, brs. SE. Desc. 69 ft. over NE slope.
32.65	Wash, 10 lks. wide, course SE. Asc. 66 ft. over SW slope.
37.50	Same spur, brs. SW. Asc. gradual S. slope of spur top to
40.00	Set an iron post 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post, for the $\frac{1}{4}$ sec. cor. of secs. 25 and 26, with brass cap mkd.



1929

	No bearing trees available. Cor. set on SE edge of shallow wash, course SW. Asc. 39 ft. up wash.
44.90	Lv. wash, from NE; asc. 100 ft. over SE slope.
49.80	Wash, 10 lks. wide, course SE. Asc. 415 ft. over SW slope.

Survey of the Subdivision Lines of T. 9 N., R. 4 W.

Chains

59.30 Spur, brs. SE. Asc. 96 ft. over SE slope.  
 64.00 Rocky ridge, brs. NE-SW. From this point,  
 N. 60° W., -2½° V.A. to Goat shed, in sec. 23.  
 S. 38° 08' W., -1° 10' V.A. to USBM 3187.  
 N. 49° W., -2° 35' V.A. to USBM 3530.  
 Desc. 211 ft. over NW slope.  
 73.75 Head of wash, course NW. Asc. gradual SW slope.  
 77.50 Spur, brs. NW. Desc. 131 ft. over NE slope to  
 79.50 Wash, 10 lks. wide, course NW. Asc. gradual SW slope to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in  
 the ground for the cor. of secs. 23, 24, 25 and 26,  
 with brass cap mkd.

T9N	R4W
S23	S24
S26	S25

1929

No bearing trees available; raise a md. of stone 4 ft. base, 2 ft. high W. of cor.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, mesquite and palo verde.  
 Undergrowth, cacti and greasewood.

40.00 East, on random line, bet. secs. 24 and 25.  
 Set temp. ¼ sec. cor.  
 80.00 Intersect the cor. of secs. 19, 24, 25 and 30 on E. Bdy.  
 of Tp., hereinbefore described.  
 Thence,  
 West, on true line, bet. secs. 24 and 25.  
 Over mountainous land, thru scattering timber & under-  
 growth.  
 Asc. 132 ft. over E. slope.  
 3.80 Spur, brs. N. Desc. 80 ft. over NW slope.  
 19.00 Wash, 10 lks. wide, course NW. (about 5 chs. SE to hd.)  
 Asc. 34 ft. over NE slope.  
 9.70 Short spur, brs. N. Desc. 44 ft. over NW slope.  
 14.30 Wash, 20 lks. wide, course NE. Asc. 349 ft. over rough  
 East slope.  
 23.50 Rocky spur, brs. SE. and from NW.  
 Desc. 23 ft. over SW slope.  
 28.20 Wash, near hd. course S. Asc. 60 ft. over SE slope.  
 33.60 Same spur, brs. NE. Desc. 60 ft. over NW slope.  
 39.00 Head of small ravine, course N. Asc. gradual NE slope to  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 6 ins. in  
 the ground to bedrock, deposit a stone mkd. with a  
 cross (X) at base of post, raise a md. of stone about  
 post for the ¼ sec. cor. secs. 24 and 25, with brass  
 cap mkd.

1 S 24
S 25

1929

No bearing trees available.

Asc. gradual NE slope.  
 43.30 Short spur, brs. N. Desc. 116 ft. over NW slope.  
 48.30 Wash, 30 lks. wide, course NE (about 10 chs. SW to hd.)  
 Asc. 555 ft. over rough E. slope.  
 65.30 Spur, brs. NW. Sam Powell Peak brs. S. 10° E., about 5 chs.  
 distant.

Survey of the Subdivision Lines of T. 9 N., R. 4 W.

Chains

80.00 Desc. 378 ft. over SW slope to  
The cor. of secs. 23, 24, 25 and 26.

Land, mountainous.  
Soil, rocky 4th. rate.  
Timber, scrub mesquite and palo verde.  
Undergrowth, cacti and catclaw.

N.0°01'W., on true line, bet. secs. 23 and 24.  
Over mountainous land, thru scattering timber & under-  
growth.

12.20 Wash, 10 lks. wide, course SW. Asc. 175 ft. over S. slope.

17.50 Spur, brs. W. Desc. 140 ft. over West slope.

31.20 Wash, 10 lks. wide, course W. (W. about 5 chs. thence SW.)  
Asc. 40 ft. over SW slope.

38.00 Spur, brs. W. Desc. 27 ft. over NW slope to

40.00 Set an iron post 3 ft. long, 1 in. in diam., 12 ins. in  
the ground to bedrock, deposit a stone mkd. with a  
(X) at base of post, raise a mound of stone about post,  
for the 1/4 sec. cor. of secs. 23 and 24, with brass cap  
marked



1929

No bearing trees available.

Desc. 407 ft. over rough NW slope.


59.50 Wash, 20 lks. wide, course SW. Asc. 104 ft. over S. slope.

65.80 Spur, brs. SW. Desc. 72 ft. over NW slope.

72.00 Small wash, course SW. Asc. 36 ft. over S. slope.

75.25 Spur, brs. West; across level top.

80.00 On N. edge of spur, set an iron post 3 ft. long, 2 ins.  
in diam., 18 ins. in the ground to bedrock, deposit  
a stone mkd. with a cross (X) at base of post, raise  
a md. of stone about post, for the cor. secs. 13, 14,  
23 and 24, with brass cap mkd.



1929

No bearing trees available.

Land, mountainous.  
Soil, rocky 4th. rate.  
Timber, mesquite.  
Undergrowth, scrub paloverde, catclaw and cacti.

East, on random line, bet. secs. 13 and 24.

40.00 Set temp. 1/4 sec. cor.

80.06 Fall 6 lks. N. of the cor. of secs. 13, 18, 19 and 24,  
on E. Bdy. of Tp., hereinbefore described.

Thence,  
N. 89° 57' W., on true line, bet. secs. 13 and 24.

Survey of the Subdivision Lines of T. 9 N., R. 4 W. BOOK 3893

Chains

Over mountainous land, thru scattering timber & undergrowth.  
 Desc. gradual SW slope.  
 6.70 Wash, 20 lks. wide, course SE. Asc. 221 ft. over NE slope.  
 26.70 Narrow, jagged spur, brs. S.20°E. A butte, with perpendicular sides, 100 ft. high, brs. N. about 15 chs. dist.  
 Desc. 119 ft. over SW slope.  
 30.60 Wash, 20 lks. wide, course SW. Asc. 108 ft. over SE slope.  
 38.10 Spur, brs. S: Desc. 34 ft. over W. slope to  
 39.86 Set an iron post 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the witness cor. to the 1/4 sec. cor. of secs. 13 and 24, with brass cap mkd.

WC 1/4 S 13  
 S 24  
 1929

40.03 Desc. gradual SW slope.  
 True point for the 1/4 sec. cor. falls on face of cliff, with vertical face, 20 ft. high, brs. N-S., where it is impracticable to monument same, therefore establish witness cor. as hereinbefore described.

40.40 Desc. 30 ft. over W. slope.  
 Wash, 10 lks. wide, course SW. Asc. 30 ft. over E. slope.  
 42.50 Spur, brs. S. Desc. 30 ft. over SW slope.  
 45.20 Wash, 10 lks. wide, course S. Asc. gradual E. slope.  
 55.70 Ridge, brs. NE-SW. Desc. 206 ft. over W. slope.  
 63.30 Wash, 10 lks. wide, course NW. Asc. 12 ft. over NE slope.  
 65.60 Spur, brs. NW. Desc. 137 ft. over NW slope to  
 80.06 The cor. of secs. 13, 14, 23 and 24.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, scrub mesquite and paloverde.  
 Undergrowth, cacti, catclaw and desert brush.

M.0°01'W., on true line, bet. secs. 13 and 14.  
 Over mountainous land, thru scattering timber & undergrowth.

Desc. 36 ft. over N. slope.  
 1.20 Wash, 20 lks. wide, course SW. Asc. 20 ft. over SE slope.  
 3.30 Spur, brs. SW. Desc. 34 ft. over NW slope.  
 8.30 Enter Fools Wash; across sandy land.  
 12.00 Center of wash, course S.30°W.  
 16.30 Leave wash, asc. 10 ft. over vertical bank.  
 16.50 Asc. 62 ft. over SE slope.  
 20.50 Spur, brs. SW. Desc. gradual NW slope.  
 25.00 Enter shallow wash, course S.20°W. across bottom of same.  
 28.00 Leave wash, Asc. 30 ft. over SE slope.  
 31.00 Low point, brs. NE. Desc. gradual N. slope.  
 33.00 Same wash, course SE. asc. up same.  
 37.00 Leave wash, from NW; asc. 40 ft. over SE slope to  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 13 and 14, with brass cap mkd.

1/4  
 S14 | S13

1929

No bearing trees available.

Survey of the Subdivision Lines of T. 9 N., R. 4 W.

Chains

Asc. 91 ft. over SE slope.  
 48.00 Spur, brs. S.20°W. Desc. 14 ft. over NW slope.  
 49.00 Same wash, course SW. Asc. gradual along W. edge of same.  
 52.00 Leave wash, from N.20°E. Asc. 358 ft. over SE slope.  
 72.00 Spur, brs. West. Desc. gradual, boulder covered NW slope to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the cor. of secs. 11, 12, 13 and 14, with brass cap mkd.

T9N	R4W
S11	S12
S14	S13

1929

No bearing trees available.  
 Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, willow & cottonwood along Fools wash; elsewhere mesquite.  
 Undergrowth, cacti, catclaw and paloverde.

40.00 S.89°57'E., on random line, bet. secs. 12 and 13.  
 Set temp. 1/4 sec. cor.  
 80.06 Fall 9 lks. S. of the cor. of secs. 7, 12, 13 & 18, on E. Bdy. of Tp.; hereinbefore described.  
 Thence,  
 S.89°59'W., on true line, bet. secs. 12 and 13.  
 Over mountainous land, thru scattering timber & undergrowth.  
 Asc. 24 ft. over E. slope.  
 1.75 Spur, brs. S.20°E. Desc. 139 ft. over SW slope.  
 8.85 Wash, 10 lks. wide, course SW. Asc. gradual E. slope.  
 13.30 Spur, brs. S. Desc. 64 ft. over W. slope.  
 16.80 Wash, 20 lks. wide, course S. Asc. 62 ft. over E. slope.  
 20.20 Ridge, brs. S.10°E. Desc. 314 ft. over SW slope.  
 39.30 Center of Fools Wash, 2 chs. wide, intermittent flow of water in this part of wash, courseing S.30°E.  
 40.03 True point for the 1/4 sec. cor. falls in wash, where it is impracticable to monument the cor. Establish witness cor. as hereinafter described.  
 41.00 Leave wash, asc. 50 ft. over E. slope.  
 41.30 Over level spur top to  
 41.53 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post for the witness cor. to 1/4 sec. cor. of secs. 12 and 13, with brass cap mkd.

1/4	S 12	WC
	S 13	
	1929	

from which,  
 a cottonwood, 10 ins. in diam., brs. N.66°E., 135 lks. dist., mkd. WC 1/4 S12 BT  
 a cottonwood, 20 ins. in diam., brs. S.52°E., 113 lks. dist., mkd. WC 1/4 S13 BT

42.00 Desc. 17 ft. over SW slope.  
 42.60 Wash, 10 lks. wide, course S.10°E. Asc. 20 ft. over NE slope.

Survey of the Subdivision Lines of T.8 N., R.4 W.


Chains

Asc. 303 ft. over NE slope.  
 59.60 Spur, brs. S.40°E. Asc. 243 ft. over NE slope.  
 71.00 South end of broken butte, on ridge, brs. N-S.  
 Desc. 252 ft. over W. slope to  
 80.06 The cor. of secs. 11, 12, 13 and 14.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde.  
 Undergrowth, cacti, catclaw and desert brush.


N.0°01'W., on true line, bet. secs. 11 and 12.  
 Over mountainous land, thru scattering timber & undergrowth.

Desc. 45 ft. over NW slope.  
 3.30 Wash, 15 lks. wide, course S.35°W.  
 Asc. 322 ft. over broken SW slope.  
 14.90 West end of rough spur; desc. 316 ft. over NW slope.  
 30.00 Wash, 10 lks. wide, course S.70°W.  
 Asc. 30 ft. over SW slope.  
 51.00 Spur, brs. S.70°W. Continue over rolling W. slope.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock, deposit a stone marked with a cross (+) at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 11 and 12, with brass cap marked



1929. from which,  
 a cottonwood, 10 ins. in diam., brs. N.3 1/4°E., 309 lks. distant, marked 1/4 S12 BT

Desc. gradual NW slope.  
 42.40 Wash, 10 lks. wide, course S.40°W.  
 Continue over rolling E. slope.  
 43.30 Same wash, course S.20°E.  
 44.50 Same wash, course S.20°W. Asc. 138 ft. over SE slope.  
 59.20 Spur, brs. E. Desc. 20 ft. over N. slope.  
 61.30 Wash, 10 lks. wide, course S.80°E.  
 Asc. 85 ft. over SE slope to  
 79.30 Spur, brs. S.80°E. Desc. gradual NE slope to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, deposit a stone marked with a cross (+) at base of post, raise a mound of stone about post, for the cor. of secs. 1, 2, 11 and 12, with brass cap marked



1929  
 No bearing trees available.

Land, mountainous and rolling.  
 Soil, rocky 4th. rate.  
 Timber, mesquite and paloverde.  
 Undergrowth, cacti, catclaw and desert brush.

Survey of the Subdivision Lines of T.9 N., R.4 W.

Chains

N. 89° 59' E., on random line, bet. secs. 1 and 12.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.92 Fall 2 lks. N. of the cor. of secs. 1, 6, 7 and 12 on  
 E. Bdy. of Tp., hereinbefore described.  
 Thence, West, on true line, bet. secs. 1 and 12.  
 Over mountainous land, thru scattering timber and under-  
 growth. Asc. 33 ft. over SE slope.  
 5.20 Spur, brs. S. Desc. 37 ft. over SW slope.  
 9.00 Enter Fools Wash, course S. 10° W.; across rocky bottom.  
 Small springs along this wash.  
 11.00 Leave bottom; asc. 404 ft. over NE slope.  
 37.40 Spur, brs. S. 50° E. Desc. gradually along S. slope to  
 39.96 Set an iron post 3 ft. long, 1 in. in diam., 10 ins. in  
 the ground to bedrock, deposit a stone marked with  
 a cross (+) at base of post, raise a mound of stone  
 about post, for the  $\frac{1}{4}$  sec. cor. of secs. 1 and 12,  
 with brass cap marked

$\frac{1}{4}$   $\frac{S 1}{S 12}$

1929

No bearing trees available.  
 Asc. gradual SE slope.  
 42.50 Spur, brs. N-S. Desc. 80 ft. over SW slope.  
 60.50 Wash, 40 lks. wide, course SW.  
 Asc. 94 ft. over SE slope.  
 70.40 Spur, brs. S. 40° E. Desc. 60 ft. over SW slope.  
 73.50 Wash, 30 lks. wide, course S. 40° E.  
 Asc. 157 ft. over NE slope to  
 79.92 The cor. of secs. 1, 2, 11 and 12.  
 Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, mesquite & along Fools wash, cottonwood & willow.  
 Undergrowth, oakbrush & cacti.

N. 0° 01' W., on true line, bet. secs. 1 and 2.  
 Over mountainous land, thru scattering timber & under-  
 growth. Desc. 57 ft. over NE slope.  
 6.00 Wash, 20 lks. wide, course S. 20° E. Asc. 210 ft. over SW  
 slope.  
 14.00 Spur, brs. S. 70° E.; across level top.  
 17.00 Spur, brs. NE. Desc. 152 ft. over NW slope.  
 28.00 Wash, 30 lks. wide, course N. 70° E. Asc. gradually over  
 SE slope.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 10 ins. in  
 the ground to bedrock, deposit a stone marked with  
 a cross (+) at base of post, raise a mound of stone  
 about post, for the  $\frac{1}{4}$  sec. cor. of secs. 1 and 2,  
 with brass cap marked

$\frac{1}{4}$   
 S2 | S1

1929

No bearing trees available.  
 Asc. 315 ft. over E. slope.  
 70.71 Wash, 20 lks. wide, course S. 80° E.  
 Asc. 91 ft. over SE slope.  
 73.34 Spur, brs. S. 80° E.  
 Asc. gradual SE slope to



Survey of the Subdivision Lines of T. 9 N., R. 4 W.


Chains.

80.54

asc. gradually SE slope.

Intersect the 2nd Bdy. of sec. 35, T.10 N., R.4 W., at 11.30 chs. West, of the cor. of secs. 35 & 36, herebefore described.

At point of intersection set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for closing cor. of secs. 1 and 2, with brass cap mkd.



1929

No bearing trees available.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, mesquite and oak.  
 Undergrowth, cacti, catclaw and oakbrush.


From the reestablished std. cor. of secs. 34 & 35 on Sbdy. of Tp. (2nd Std. Par. N.) described in Book "A", N.0°01'W., on true line, bet. secs. 34 and 35. Over mountainous land, thru scattering timber & undergrowth. Asc. 277 ft. over SE slope.

30.50  
36.25  
40.00

Spur, brs. SW. Desc. 29 ft. over NW slope.

Wash, 20 lks. wide, course SW. Asc. 57 ft. over S. slope.

Set an iron post 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 34 & 35, with brass cap marked



1929

No bearing trees available.

46.50  
59.30  
51.00  
64.35  
68.00  
74.00  
80.00

Asc. 134 ft. over S. slope.

Spur, brs. West. Desc. 162 ft., over NW. slope.

Wash, 10 lks. wide, course W. Asc. 50 ft. over S. slope.


Spur, brs. W. Desc. 78 ft. over N. slope.

Wash, 20 lks. wide, course W. Asc. 34 ft. over S. slope.

Spur, brs. SW. Desc. 28 ft. over NW slope.

Wash, 20 lks. wide, course SW. Asc. 46 ft. over SW slope.

Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in the ground for the cor. of secs. 26, 27, 34 and 35, with brass cap mkd.



1929

No bearing trees available. Raise a mound of stone 4 ft. base, 2 ft. high W. of cor.

Land, mountainous; soil, rocky 4th. rate. Timber, paloverde and mesquite; undergrowth, cacti, catclaw and greasewood.

Survey of the Subdivision Lines of T. 9 N., R. 4 W.

Chains

East, on random line, bet. secs. 26 and 35.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.86 Fall 5 lks. N. of the cor. of secs. 25, 26, 35 and 36,  
 Thence  
 N.  $89^{\circ}58'W.$ , on true line, bet. secs. 26 and 35.  
 Over mountainous land, thru scattering timber & undergrowth.  
 Desc. 13 ft. over SW slope.  
 1.50 Head of wash, course SE. Asc. 69 ft. over E. slope.  
 5.60 Spur, brs. SE. Desc. 68 ft. over SW slope.  
 9.50 Wash, 20 lks. wide, course SE. Asc. 326 ft. over E. slope.  
 23.30 Spur, brs. SE. Desc. 176 ft. over SW slope.  
 31.80 Wash, 20 lks. wide, course SE. Asc. 266 ft. over steep E.  
 slope.  
 39.93 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in  
 the ground to bedrock, deposit a stone mkd. with a  
 cross (X) at base of post, raise a mound of stone about  
 post, for the  $\frac{1}{4}$  sec. cor. of secs. 26 and 35, with brass  
 cap mkd.

S 26

S 35

1929

No bearing trees available.

Asc. 69 ft. over SE slope.  
 42.20 Spur, brs. SW. Desc. 101 ft. along N. slope.  
 52.30 Spur, brs. NW. Desc. 240 ft. over NW slope, to spur.  
 64.96 Power line, brs. NW-SE.  
 71.40 Wash, 20 lks. wide, course SW. Asc. 25 ft. over SE slope.  
 78.20 Spur, brs. SW. Desc. 42 ft. over W. slope to  
 79.86 The cor. of secs. 26, 27, 34 and 35.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and greasewood.

N.  $0^{\circ}01'W.$ , on true line, bet. secs. 26 and 27.  
 Over mountainous land, thru scattering timber & under-  
 growth.

Asc. 57 ft. over SW slope.  
 6.90 Spur, brs. SW. Desc. 87 ft. over N. slope.  
 12.15 Wash, 20 lks. wide, course SW. Asc. gradual S. slope.  
 13.00 Edge of level bench, brs. E-W. over NW slope.  
 15.30 Power line, brs. NW-SE. Asc. 42 ft. over SW slope.  
 18.00 Leave bench; desc. 20 ft. over NW slope.  
 18.65 Wash, 20 lks. wide, course SW. Asc. 621 ft. over SE slope.  
 25.70 Spur, brs. SW. Continue on gradual ascent up same.  
 31.00 Leave spur, from NE. Desc. 23 ft. over NE slope.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 10 ins. in the  
 ground to bedrock, deposit a stone mkd. with a cross  
 (X) at base of post, raise a md. of stone about post,  
 for the  $\frac{1}{4}$  sec. cor. of secs. 26 and 27, with brass cap  
 mkd.

S 27 | S 26

1929

No bearing trees available.

Desc. 18 ft. over N. slope.  
 42.00 Small ravine; course W. Asc. 20 ft. over S. slope.  
 48.50 Spur, brs. West. Desc. 150 ft. over NW slope.  
 56.80 Center of Pools Wash, 150 lks. wide, course SW.

Survey of the Subdivision Lines of T. 9 N., R. 4 W.

Chains

Asc. 231 ft. over steep S. slope.  
 69.00 Spur, brs. SW. Desc. 10 ft. over NW slope.  
 76.70 Wash, 10 lks. wide, course SW. Asc. 58 ft. over steep S. slope to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the cor. of secs. 22, 23, 26 and 27, with brass cap mkd.

T9N	R4W
S22	S23
S27	S26

1929

No bearing trees available.

Land, mountainous and rolling.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and greasewood.

S. 89° 58' E., on random line, bet. secs. 23 and 26.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.00 Fall 12 lks. S. of the cor. of secs. 23, 24, 25 and 26, Thence,  
 S. 89° 57' W., on true line, bet. secs. 23 and 26.  
 Over mountainous land, thru scattering timber & undergrowth.  
 Desc. 159 ft. over SW slope.  
 12.70 Wash, 20 lks. wide, course NW. Asc. 40 ft. over NE slope.  
 15.00 Desc. 109 ft. over N. slope.  
 25.00 Spur, brs. NW. Desc. 185 ft. over W. slope.  
 38.30 Small wash, course N. 80° W., from SE. Asc. slight NE slope.  
 39.80 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the witness cor. to the  $\frac{1}{4}$  sec. cor. of secs. 23 and 26, with brass cap mkd.

WC $\frac{1}{4}$	S 23
	S 26

1929

No bearing trees available.

Desc. slight NW slope.  
 40.00 True point for the  $\frac{1}{4}$  sec. cor. of secs. 23 and 26, falls in center of wash, from NE, courses West.  
 Establish witness cor. as hereinbefore described.  
 41.30 Leave wash, courses SW. Asc. gradual NE slope.  
 44.10 Wash, brs. SW. Desc. 159 ft. over NW slope.  
 50.00 Center of Fools Wash, 150 lks. wide, course South.  
 Spring, brs. N. about 10 chs. up this wash.  
 Asc. 91 ft. over SE slope.  
 56.00 Spur, brs. S. Desc. 30 ft. over W. slope.  
 60.15 Wash, 10 lks. wide, course SE.  
 Asc. 362 ft. over NE slope.  
 72.00 Spur, brs. SW. Desc. 114 ft. over SW slope.  
 76.25 Head of wash, course SW. Desc. 39 ft. over SW slope to  
 80.00 The cor. of secs. 22, 23, 26 and 27.


Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and desert brush.

Survey of the Subdivision Lines of T. 9 N., R. 4 W.

Chains


N.0° 01'W., on true line, bet. secs. 22 and 23.  
Over mountainous land, thru scattering timber & undergrowth.

- Asc. 148 ft. over S. slope.
- 7.10 Spur, brs. SW. Desc. 99 ft. over N. slope.
- 14.00 Wash, 10 lks. wide, course SW. Asc. 102 ft. over SE slope.
- 18.90 Spur, brs. W. Desc. 144 ft. over NW slope.
- 25.90 Wash, 20 lks. wide, course SW. Asc. 107 ft. over SE slope.
- 31.40 Short spur, brs. West. Desc. 54 ft. over NW slope.
- 36.20 Wash, 20 lks. wide, course SW. Asc. 70 ft. over S. slope to
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 22 and 23, with brass cap mkd.



No bearing trees available.

- Asc. 20 ft. over S. slope.
- 41.00 Spur, brs. S.60°W.
- 41.10 From which,
  - USBM No. 3530 which is a mound of stone, 5 ft. high, and 5 ft. base, (no marked cap found) brs. N.83°E.. From this point: (BM).
  - USBM 3187 brs. S.27°W., -40' V.A.
  - The cor. of secs. 23, 24, 25 and 26 brs. S.57°37'E., -0°25'V.A.
  - House, brs. N.73°E., -9° V.A.
  - Cor. of secs. 13, 14, 23 and 24, brs. N.61°E., -4°17' V.A.
  - Bend in Fools Wash, close to spring, brs. S.45°E., -15 1/2° " "
- Desc. 132 ft. over NW slope.
- 53.60 Small ravine, course N.30°W. Continue descent of 78' over NW slope
- 71.00 Wash, 1 ch. wide, course S.30°W. Asc. 26 ft. over SE slope.
- 74.00 Low spur, brs. S.30°W. Desc. 20 ft. over NW slope.
- 78.00 Wash, 20 lks. wide, course S.20°W.
- Asc. gradual SE slope to
- 80.00 Spur, brs. SW. Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post, for the cor. of secs. 14, 15, 22 and 23, with brass cap marked



1929.  
No bearing trees available.  
Land, mountainous.  
Soil, rocky 4th. rate.  
Timber, paloverde and mesquite.  
Undergrowth, cacti, catclaw and desert brush.

- 40.00 N.89°57'W., on random line, bet. secs. 14 and 23.  
Set temp. 1/4 sec. cor.
- 79.96 Fall 12 lks. N. of the cor. of secs. 13, 14, 23 and 24. Thence  
N.89°58'W., on true line, bet. secs. 14 and 23.  
Over mountainous land, thru scattering timber & undergrowth.  
Desc. 60 ft. over NW slope.

Survey of the Subdivision Lines of T. 9 N., R. 4 W.

- Chains
- 6.00 Center of Fools Wash, 2 chs. wide, course S. Asc. 58 ft. over E. slope.
- 9.20 Spur, brs. S. Desc. 22 ft. over W. slope.
- 12.00 Wash, 20 lks. wide, course S.35°W. Asc. 58 ft. over E. slope.
- 15.40 Spur, brs. S. Small house & spring, brs. S. about 25 chs. dist. Desc. 54 ft. over W. slope.
- 19.00 Wash, 40 lks. wide, course S.10°E. Asc. 69 ft. over E. slope.
- 20.50 Trail, brs. NE-SW.
- 23.20 Spur, brs. S.60°E. Desc. 20 ft. over SW slope.
- 26.80 Wash, 20 lks. wide, course S.50°E. Asc. 108 ft. over rough NE slope.
- 39.98 Set an iron post 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, deposit an iron washer 2 ins. in diam., at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 14 and 23, with brass cap mkd.

$\frac{1}{4}$   $\frac{S\ 14}{S\ 23}$   
 1929

- No bearing trees available.
- Asc. 29 ft. over E. slope.
- 41.20 Black, rocky knoll brs. N., about 70 lks. distant.  
       "      "      "      "      S.,      "      130      "      "
- 45.90 Desc. 30 ft. over West slope.
- 45.90 Wash, 20 lks. wide, course NE. Asc. gradual E. slope.
- 55.80 Spur, brs. N. Desc. gradual SW slope.
- 65.50 Wash, 40 lks. wide, course SW. Asc. gradual E. slope.
- 69.50 Spur, brs. S.60°W. Desc. gradual W. slope.
- 73.40 Wash, 10 lks. wide, course SW. Asc. gradual E. slope.
- 75.00 Spur, brs. S. Desc. gradual W. slope.
- 78.00 Wash, 10 lks. wide, course SW. Asc. gradual E. slope.
- 80.00 Spur, brs. SW. Desc. slight W. slope to
- 79.96 The cor. of secs. 14, 15, 22 and 23.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, mesquite and paloverde.  
 Undergrowth, cacti, catclaw and greasewood.

- 
- N.0°01'W., on true line, bet. secs. 14 and 15.  
 Over mountainous land, thru scattering timber & undergrowth.  
 Desc. gradual N. slope.
  - 3.50 Small ravine, course S.80°W. Asc. 127 ft. over SE slope.
  - 19.90 Spur, brs. E. Desc. 34 ft. over NE slope.
  - 25.90 Small wash, course SE. Asc. 63 ft. over SE slope.
  - 32.40 Spur, brs. SW. Desc. 44 ft. over NW slope.
  - 40.00 Set an iron post 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, deposit a horseshoe at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 14 and 15, with brass cap mkd.

$\frac{1}{4}$   
 S15 | S14  
 1929

No bearing trees available.

Survey of the Subdivision Lines of T. 9 N., R. 4 W.

Chains

43.20 Desc. 22 ft. over NW slope.  
 46.50 E. edge of wash, at bend from NW-SW.  
 Same wash, course S.20°W.  
 57.00 Asc. 23 ft. over E. slope of spur.  
 Top of spur, brs. S.10°W. Asc. gradually up same.  
 71.70 Leave spur, from N.20°W. Desc. 22 ft. over NE slope.  
 76.00 Wash, 20 lks. wide, course S.20°E.  
 Asc. gradual SW slope to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 17 ins. in the ground to bedrock, deposit a piece of iron brake rod 14 ins. long, alongside post, raise a mound of stone about post, for the cor. of secs. 10, 11, 14 and 15, with brass cap marked

T9N	R4W
S10	S11
S15	S14

1929

No bearing trees available.  
 Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and desert brush.

40.00 S, 89°58'E., on random line, bet. secs. 11 and 14.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.12 Fall 5 lks. N. of the cor. of secs. 11, 12, 13 and 14.  
 Thence,  
 N. 89°56'W., on true line, bet. secs. 11 and 14.  
 Over mountainous land, thru scattering timber & undergrowth.  
 Desc. 273 ft. over W. slope.  
 4.30 Wash, 10 lks. wide, course SW.  
 5.40 Same wash, course W.  
 8.40 Same wash, course SW. Asc. gradual E. slope.  
 15.30 Spur, brs. SW. Desc. 92 ft. over SW slope.  
 24.50 Wash, 20 lks. wide, course S. Intermittent water found in this wash.  
 Asc. 52 ft. over SE slope.  
 31.20 Spur, brs. SW. Desc. 40 ft. over W. slope.  
 34.75 Wash, 5 lks. wide, course S.  
 Asc. 31 ft. over SE slope.  
 38.10 Rocky spur, brs. S. Desc. gradual W. slope to  
 40.06 Set an iron post 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post, for the  $\frac{1}{4}$  sec. cor. of secs. 11 and 14, with brass cap marked

$\frac{1}{4}$	S 11
	S 14

1929

43.00 Desc. 37 ft. over SW slope.  
 Wash, 10 lks. wide, course SE. Asc. 37 ft. over NE slope.  
 43.20 Spur, brs. SE. Desc. 25 ft. over SW slope.  
 44.40 Wash, 10 lks. wide, course SE. Asc. 242 ft. over steep East slope.  
 55.10 Ridge, brs. NE-SW. Desc. 195 ft. over NW slope.  
 72.05 Wash, 10 lks. wide, course S. Asc. 50 ft. over SE slope.  
 75.80 Spur, brs. SW. Desc. 46 ft. over NW slope, to  
 80.12 The cor. of secs. 10, 11, 14 and 15.


Survey of the Subdivision Lines of T. 9 N., R. 4 W.

Chains

Land, mountainous.  
Soil, rocky 4th. rate.  
Timber, mesquite and paloverde.  
Undergrowth, cacti, catclaw and desert brush.

N.0°01'W., on true line, bet. secs. 10 and 11.  
Over mountainous land, thru scattering timber & undergrowth.


- 1.00 Desc. 40 ft. over NW slope.
- Edge of wash, at bend from NW-SW. Asc. 70 ft. over SW slope.
- 3.20 End of spur, from E. Desc. 40 ft. over NW slope.
- 8.80 Wash, 20 lks. wide, course SW. Intermittent flow of water in this wash, to NE. Mine hoist, SW 3.00 chs. dist. Asc. 57 ft. over SE slope.
- 12.00 Spur, brs. E. Asc. 40 ft. over E. slope.
- 18.00 Spur, brs. SW. Desc. gradually over NW slope.
- 19.80 Head of wash, course SW. Asc. 52 ft. over SE slope.
- 22.20 Narrow spur, brs. W. Desc. 40 ft. over NW slope.
- 26.20 Wash, 30 lks. wide, course SW. Asc. 275 ft. over broken S. slope to 1/4 sec. cor.
- 32.10 Inclined shaft on line.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post; raise a mound of stone about post, for the 1/4 sec. cor. of secs. 10 and 11, with brass cap marked



1929

No bearing trees available.  
From cor., a spring of water, brs. East, about 12 chs. dist. A concrete water trough is built here.

- 45.00 Asc. 91 ft. over SW slope.
- Spur, brs. SE: Continue ascent of 548 ft. over rough, boulder strewn SE slope.
- 66.70 Spur, brs. E. Desc. 128 ft. over NE slope to
- 75.00 Draw, course E. Asc. 128 ft. over SE slope to
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post; raise a mound of stone about post, for the cor. of secs. 2, 3, 10 and 11; with brass cap marked



1929

No bearing trees available.

Land, mountainous.  
Soil, rocky 4th. rate.  
Timber, mesquite.  
Undergrowth, oakbrush, catclaw and madrona, and manzanita.

Survey of the Subdivision Lines of T. 9 N., R. 4 W.

Chains	
	S. 89° 56' E., on random line, bet. secs. 2 and 11.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.90	Fall 30 lks. S. of the cor. of secs. 1, 2, 11 and 12.
	Thence,
	S. 89° 51' W., on true line, bet. secs. 2 and 11.
	Over mountainous land, thru scattering timber & undergrowth.
	Asc. 78 ft. over NE slope.
2.10	Spur, brs., S. 70° E. Continue ascent over SE slope.
6.60	Spur, brs. S. Desc. 265 ft. over W. slope.
17.55	Wash, 30 lks. wide, course S. Asc. 192 ft. over E. slope.
28.50	Spur, brs. S. Continue along S. slope.
35.50	Spur, brs. S. Desc. 100 ft. over W. slope.
39.95	Set an iron post 3 ft. long, 1 in. in diam., on bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post, for the $\frac{1}{4}$ sec. cor. of secs. 2 and 11, with brass cap marked
	$\frac{1}{4} \begin{array}{c} S 2 \\ S 11 \end{array}$
	1929
41.00	Desc. 32 ft. over W. slope. Enter dense undergrowth.
	Wash, 30 lks. wide, course S. Asc. 548 ft. over rough East slope.
57.50	Spur, brs. SE. Asc. gradual S. slope.
60.00	Spur, brs. S. Desc. 134 ft. over SW slope.
74.00	Wash, 15 lks. wide, course S. 10° E. Asc. 74 ft. over E. slope.
79.90	The cor. of secs. 2, 3, 10 and 11.
	Land, mountainous.
	Soil, rocky 4th. rate.
	Timber, willow and cottonwood along larger washes; elsewhere mesquite.
	Undergrowth, laurel, catclaw and cacti. & manzanita.
-----	
	N. 0° 01' W., on true line, bet. secs. 2 and 3.
	Over mountainous land, thru scattering timber and dense undergrowth.
	Asc. 376 ft. over S. slope.
15.70	Short spur, brs. SE. Desc. 23 ft. over NE slope.
21.20	Wash, 15 lks. wide, course SE. Asc. 104 ft. over SW slope.
30.00	Spur, brs. W. Desc. 24 ft. over NW slope.
36.50	Wash, 10 lks. wide, course S. 20° W. Asc. gradual SE slope to
40.00	Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. of secs. 2 and 3, with brass cap mkd.
	$\frac{1}{4} \begin{array}{c} S 3 \\ S 2 \end{array}$
	1929
	Raise a mound of stone 4 ft. base, 1 $\frac{1}{2}$ ft. high W. of cor. 3 ft. distant.
	Desc. 21 ft. over NW slope.
44.30	Wash, 20 lks. wide, course SW. Asc. 174 ft. over S. slope.
51.80	Divide brs. N. 60° E. and S. 60° W.
	Desc. 88 ft. over NW slope, to wash.
53.90	Branch spur, brs. NW.
57.15	Wash, near head, course NW. Asc. 234 ft. over SW slope.
60.10	Spur, brs. N. 70° W.




Survey of the Subdivision Lines of T. 9 N., R. 4 W.

Chains

80.90

Desc. 156 ft. over N. slope to  
 Intersect the S. bdy. of sec. 34, T.10 N., R. 4 W., at  
 11.20 chs. West, of the cor. of secs. 34 and 35, here-  
 inbefore described.  
 At point of intersection set an iron post 3 ft. long,  
 2 ins. in diam., 12 ins. in the ground to bedrock,  
 deposit a stone marked with a cross (X) at base of  
 post, raise a mound of stone about post, for the  
 closing corner of secs. 2 and 35, with brass cap  
 mkd.



1929

No bearing trees available.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, mesquite, and oak.  
 Undergrowth, manzanita, catclaw, cacti and laurel.

From true point for reestablished std. cor. of secs. 33 & 34,  
 on the S. bdy. of Tp. (2nd Std. Par. N.) described in Book "A"  
 N.0°02'W., on true line, bet. secs. 33 & 34.

Over level bottom land, thru scattering timber & undergrowth.  
 From true point for the cor. of secs. 33 & 34, on true line,  
 N.0°02'W., on true line, bet. secs. 33 & 34.

4.80

Leave bottom land, brs. NW-SE. Asc. gradually over rolling land.

15.10


Wash, 30 lks. wide, course SW.

29.30

Small ravine, course SW.

40.00

Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground for the  $\frac{1}{4}$  sec. cor. of secs. 33 and 34,  
 with brass cap mkd.



1929

from which,  
 a mesquite, 6 ins. in diam., brs. N.67°E., 118 lks.  
 dist., mkd.  $\frac{1}{4}$  S 33 BT  
 a mesquite, 6 ins. in diam., brs. N.50 $\frac{1}{2}$ °E., 103 lks.  
 dist., mkd.  $\frac{1}{4}$  S 34 BT  
 USBM 3530 brs. N.32°50'E., plus 4°08' V.A.  
 USBM 3187 brs. S.26°35'W., " 1°35' V.A.

50.15

Road, brs. NW-SE.

72.90

Small ravine, course SW.

80.00

Set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in  
 the ground to bedrock, deposit a stone marked with  
 a cross (X) at base of post, raise a mound of stone  
 about post, for the cor. of secs. 27, 28, 33 and 34,  
 with brass cap mkd.

## Survey of the Subdivision Lines of T. 9 N., R. 4 W.

Chains

T9N	R4W
S28	S27
S33	S34

1929 from which;  
 a paloverde, 6 ins. in diam., brs. N.18°E., 65 lks.  
 dist., mkd. T9N R4W S27 BT  
 a paloverde, 6 ins. in diam., brs. S.79°W., 112 lks.  
 dist., mkd. T9N R4W S33 BT

No other bearing trees available.

Land, rolling.  
 Soil, rocky 4th. rate.  
 Timber, mesquite and paloverde.  
 Undergrowth, catclaw, cacti and desert brush.

40.00 East, on random line, bet. secs. 27 and 34,  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.98 Fall 9 lks. N. of the cor. of secs. 26, 27, 34 & 35.  
 Thence,  
 N. 89°55'W., on true line, bet. secs. 27 and 34.  
 Over mountainous land, thru scattering timber & undergrowth.  
 Desc. 64 ft. over SW slope.  
 2.70 Head of wash, course S. Asc. 71 ft. over SE slope.  
 7.00 Spur, brs. SW. Desc. 252 ft. over NW slope.  
 29.30 Center of Pools Wash, 150 lks. wide, course SW.  
 Asc. 129 ft. over SE slope.  
 39.80 Spur, brs. SW. Desc. slight W. slope.  
 39.99 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground for the  $\frac{1}{4}$  sec. cor. secs. 27 and 34, with  
 brass cap mkd.

$\frac{1}{4}$	S 27
	S34

1929  
 No bearing trees available; raise a mound of stone  
 3 ft. base, 1 $\frac{1}{2}$  ft. high N. of cor.  
 Desc. 111 ft. over W. slope.  
 45.00 Enter wash, course SE. Across sandy bottom.  
 54.00 Leave wash, Asc. 20 ft. over bank, brs. NW-SE.  
 54.20 Top of bank; continue ascent of 101 ft. over W. slope.  
 60.00 Thence over rolling land,  
 61.80 Old road, brs. N-S.  
 77.10 Wash, .5 lks. wide, course SW. Asc. gradual SE slope.  
 79.98 The cor. of secs. 27, 28, 33 and 34.


Land, mountainous and rolling.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and greasewood.

N. 0°02'W., on true line, bet. secs. 27 and 28.  
 Over rolling land, thru scattering timber & undergrowth.  
 Asc. gradual SW slope.  
 8.30 Top of ascent; continue slight S. slope, up spur.  
 10.80 Leave top; desc. gradual NW slope.  
 12.00 Across bottom of draw, drains SW.  
 22.00 Leave draw bottom; asc. gradual S. slope.  
 30.00 Top of spur, brs. SW; from N.

Survey of the Subdivision Lines of T. 9 N., R. 4 W. BOOK 3898

Chains


40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the 1/4 sec. cor. of secs. 27 & 28, with brass cap mkd.



No bearing trees available; raise a mound of stone 4 ft. base, 2 ft. high W. of cor. 3 ft. dist.

45.00 From corner, USBM 3187 brs. S.12°12'W., plus 0°45' V.A. USBM 3530 brs. N.48°10'E., plus 4°55' V.A.


43.00 Leave spur, from N.10°W. Desc. gradual NE slope.  
 44.80 Shallow wash, course S. 20°E. Asc. gradual SW slope.  
 50.00 Spur, brs. S.20°E.  
 54.00 Leave spur, from N.20°W. Desc. gradual NE slope.  
 55.00 Along the west edge of wash, course SE.  
 57.00 Leave wash, from N,10°E. Asc. gradual SE slope.  
 60.00 Same spur, brs. S.20°W. Desc. gradual NW slope.  
 63.00 Enter wash, course S.30°W. Across bottom of draw.  
 72.00 Leave bottom; asc. 46 ft. over SE slope.  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post, for the cor. of secs. 21, 22, 27 & 28, with brass cap mkd.



1929

No bearing trees available. Land, rolling. Soil, rocky 4th. rate. Timber, paloverde and mesquite. Undergrowth, cacti, catclaw and greasewood.

40.00 S. 89°56'E., on random line, bet. secs. 22 and 27. Set temp. 1/4 sec. cor.  
 79.88 Fall 9 lks. S. of the cor. of secs. 22, 23, 26 & 27. Thence, West, on true line, bet. secs. 22 and 27. Over rolling land, thru scattering timber & undergrowth.  
 7.50 Spur, brs. SW. Desc. gradual W. slope, 226 ft.  
 25.30 Wash, at bend from NE to W. Along S. side of wash.  
 29.50 Wash, 40 lks. wide, course S. Asc. 40 ft. over E. slope.  
 30.30 Spur, brs. S. Desc. 26 ft. over W. slope.  
 32.40 Wash, 10 lks. wide, course S. Asc. 99 ft. over E. slope.  
 37.60 Spur, brs. S. Desc. 17 ft. over SW slope.  
 39.94 Set an iron post 3 ft. long, 1 in. in diam., on bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 22 and 27, with brass cap mkd.



1929

No bearing trees available.


Survey of the Subdivision Lines of T. 9 N., R. 4 W.

Chains

- 45.40 Desc. 11 ft. over SW slope.  
Wash, 10 lks. wide, course S.  
Asc. 60 ft. over E. slope.
- 50.00 Spur, brs. S. Desc. 80 ft. over W. slope.
- 55.10 Center of wash, 2 chs. wide, course S.  
Asc. 46 ft. over E. slope.
- 58.88 Power line, brs. N.35°W.-S.35°E., thence over rolling land.
- 65.60 Old road, brs. N.30°E-S.30°W.
- 70.60 Wash, 10 lks. wide, course S.60°W.
- 72.40 Short spur, brs. S. Desc. 10 ft. over W. slope.
- 78.60 Wash, course S. Asc. gradual E. slope to
- 79.88 The cor. of secs. 21, 22, 27 and 28.

Land, rolling.  
Soil, rocky 4th. rate.  
Timber, paloverde and mesquite.  
Undergrowth, cacti, catclaw and greasewood.

- N.0°02'W., on true line, bet. secs. 21 and 22.  
Over rolling land, thru scattering timber & undergrowth.  
Asc. along E. edge of spur.
- 12.20 Rocky spur, brs. S.10°W. and NW; Desc. 70 ft. over  
NW slope.
- 14.80 Wash, 20 lks. wide, course S.60°W.  
Asc. 69 ft. over SE slope.
- 24.00 Power line, brs. N.42½°W.-S.42½°E.
- 25.00 Spur, brs. S.10°W. Asc. along SW slope.
- 32.20 Thence along west slope to
- 40.00 Set an iron post 5 ft. long, 1 in. in diam., 12 ins. in  
the ground to bedrock, deposit a stone mkd. with a  
cross (X) at base of post, raise a mound of stone  
about post for the ¼ sec. cor. of secs. 21 and 22,  
with brass cap mkd.




1929

from which,

- a paloverde, 6 ins. in diam., brs. N.46°E., 116 lks.  
dist., marked ¼ S22 BT
- a paloverde, 6 ins. in diam., brs. N.38°W., 235 lks.  
dist., marked ¼ S21 BT

- 44.00 Desc. gradual NW slope.
- 45.00 Head of small wash, course S.10°W. Asc. gradual SW slope.
- 45.00 Spur, brs. S.10°W. Desc. 34 ft. over NW slope.
- 55.30 Wash, course S.20°W. Asc. 100 ft. over SE slope.
- 66.15 Spur, brs. S.20°W. Desc. 108 ft. over NW slope.
- 75.20 Wash, 20 lks. wide, course S.60°W. Asc. 21 ft. over SE  
slope to
- 80.00 Set an iron post 5 ft. long, 2 ins. in diam., 18 ins. in  
the ground to bedrock, deposit a stone marked with  
a cross (X) at base of post, raise a mound of stone  
about post for the cor. of secs. 15, 16, 21 and 22,  
with brass cap marked



1929

No bearing trees available.

Survey of the Subdivision Lines of T. 9 N., R. 4 W.

Chains	
	<p>Land, rolling. Soil, rocky 4th. rate. Timber, paloverde and mesquite. Undergrowth, cacti, catclaw and greasewood.</p> <hr/> <p>East, on random line, bet. secs. 15 and 22. Set temp. <math>\frac{1}{4}</math> sec. cor. Intersect the cor. of secs. 14, 15, 22 and 23. Thence, West, on true line, bet. secs. 15 and 22. Over rolling land, thru scattering timber &amp; undergrowth. Shallow wash, course S.25°W. Wash, 20 lks. wide, course S. Asc. 79 ft. over SE slope. Spur, brs. S.20°E. Desc. 103 ft. over W. slope. Wash, 1 ch. wide, course SW. Asc. 110 ft. over SE slope. Spur, brs. SW; over level land to Set an iron post 3 ft. long, 1 in. in diam., 8 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post, for the <math>\frac{1}{4}</math> sec. cor. of secs. 15 and 22, with brass cap marked</p> <p style="text-align: center;"><math>\frac{1}{4}</math> <math>\frac{S 15}{S 22}</math></p> <p style="text-align: center;">1929</p> <p>No bearing trees available.</p>
40.00	
79.82	
1.70	
14.35	
21.20	
27.90	
37.00	
39.91	
41.50	<p>Over level land. N. edge of granite boulder 5 x 8 x 20 ft. Desc. 163 ft. over W. slope.</p>
48.30	Wash, 10 lks. wide, course S. Asc. 107 ft. over E. slope.
57.00	Spur, brs. S. Desc. 66 ft. over W. slope.
62.10	Head of wash, course S. Asc. 52 ft. over E. slope.
68.30	Spur, brs. S. Desc. 168 ft. over W. slope.
75.50	Wash, 20 lks. wide, course S.40°W. Asc. gradual E. slope.
79.82	The cor. of secs. 15, 16, 21 and 22.
	<p>Land, rolling. Soil, rocky 4th. rate. Timber, paloverde, and mesquite. Undergrowth, cacti, catclaw and greasewood.</p> <hr/> <p>N.0°02'W., on true line, bet. secs. 15 and 16. Over rolling land, thru scattering timber &amp; undergrowth. Asc. gradual S. slope. Spur, brs. SW.40° Desc. 49 ft. over NW slope. Enter wash, course SW; set atop same. Sh. Leave wash, from NE. s Asc. 84 ft. over SE slope. Spur, brs. E. Desc. gradual NE slope. Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the <math>\frac{1}{4}</math> sec. cor. of secs. 15 &amp; 16, with brass cap marked</p> <p style="text-align: center;"><math>\frac{1}{4}</math></p> <p style="text-align: center;">S16   S15</p> <p style="text-align: center;">1929 from which,</p> <p>a mesquite, 6 ins. in diam., brs. N.34°E., 120 lks. dist., mkd. <math>\frac{1}{4}</math> S 15 BT a paloverde, 6 ins. in diam., brs. N.59<math>\frac{1}{4}</math>°W., 165 lks. dist., mkd. <math>\frac{1}{4}</math> S 16 BT</p>
0.50	
11.40	
17.60	
27.30	
40.00	

Survey of the Subdivision Lines of T.9 N., R.4 W.

Chains

Asc. gradually along west side of small ravine, course SE.  
 45.00 Leave ravine; asc. 62 ft. over SE slope.  
 46.60 Road, brs. E-W.  
 53.00 Rocky spur, brs. SW. Desc. 30 ft. over NW slope.  
 57.60 Wash, 30 lks. wide, course SW. Asc. 23 ft. over SE slope.  
 64.70 Spur, brs. SE. Asc. gradually up same.  
 69.00 Leave spur to NW; continue along E. slope, on desc. of 10. ft.  
 75.40 Wash, 20 lks. wide, course SE. Asc. 23 ft. over SE slope.  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post, for the cor. of secs. 9, 10, 15 and 16, with brass cap marked

T9N	R4W
S9	S10
S16	S15

1929

No bearing trees available.

Land, rolling.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and greasewood.

East, on random line, bet. secs. 10 and 15.  
 40.00 Set temp. 1/2 sec. cor.  
 79.80 Intersect the cor. of secs. 10, 11, 14 and 15.  
 Thence,  
 West, on true line, bet. secs. 10 and 15. Over rolling land, thru scattering timber and undergrowth. Desc. slight W. slope.  
 0.40 Wash, 20 lks. wide, course SE. Asc. 30 ft. over E. slope.  
 2.00 Over level top of spur, brs. S.  
 4.10 A small house brs. N. about 1 ch. dist. Several other small houses in row E-W) about 2.00 chs. N. of line. These houses called the Sinoski Mine camp. Mine shaft is about 6 chs. NE.  
 9.00 Leave spur, brs. S. Desc. 30 ft. over W. slope.  
 9.50 Wash, 20 lks. wide, course SE. Small spring of water is north of line about 2 chs. dist.  
 Asc. 46 ft. over E. slope.  
 13.80 Spur, brs. S. Desc. 64 ft. over W. slope.  
 19.60 Wash, 20 lks. wide, course SE. Asc. 72 ft. over SE slope.  
 29.20 Wash, 20 lks. wide, course SE.  
 36.10 Spur, brs. S. Desc. gradual SW slope to  
 39.90 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the 1/4 sec. cor. of secs. 10 and 15, with brass cap marked

S 10
S 15

1929

No bearing trees available.

41.00 Road, brs. N-SW. on spur top.  
 41.30 W. edge of spur; desc. 29 ft. over W. slope.  
 45.60 Wash, 20 lks. wide, course SW. Asc. 23 ft. over SE slope.  
 46.10 Spur, brs. SW; across level top.  
 50.00 Leave spur, desc. 35 ft. over NW slope.


Survey of the Subdivision Lines of T. 9 N., R. 4 W.

Chains

- 51.30 Enter rocky wash, course West: from N. House of Anga Kay brs. N. about 5 chs. dist. A spring is in same wash about 2 chs. N. of house.
- 52.20 Leave wash, course SW. Asc. 42 ft. over SE slope.
- 53.60 Spur, brs. SW. Desc. 15 ft. over W. slope.
- 57.30 Wash, 5 lks. wide, course S.20°W. Asc. 28 ft. over SE slope.
- 59.30 Spur, brs. S. Desc. 30 ft. over W. slope.
- 60.50 Wash, 10 lks. wide, course SE. Asc. 31 ft. over E. slope.
- 66.00 Spur, brs. SE. Desc. 116 ft. over SW slope.
- 75.00 Wash, 10 lks. wide, course SW. Desc. gradually over SW slope to
- 79.80 The cor. of secs. 9, 10, 15 and 16.


Land, rolling.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and greasewood.

- 
- N.0°02'W., on true line, bet. secs. 9 and 10.
  - Over rolling land, thru scattering timber & undergrowth.
  - Asc. 68 ft. over S. slope.
  - 3.60 Spur, brs. SW. Desc. 65 ft. over NW slope.
  - 6.10 Wash, 30 lks. wide, course SW. Asc. 69 ft. over SE slope.
  - 16.00 Spur, brs. E. Continue ascent of 52 ft. over SE slope.
  - 21.00 Level bench, brs. NE-SW.
  - 26.00 Leave bench, brs. E-W. Asc. 27 ft. over S. slope.
  - 27.40 Spur, brs. E. Continue ascent of 315 ft. over steep S. slope.
  - 40.00 Set an iron post 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 9 and 10, with brass cap mkd.



1929  
 No bearing trees available.

- Asc. 17 ft. over S. slope.
- 42.20 Spur, brs. W. Over level top.
- 46.90 Leave spur top; desc. 118 ft. over NE slope.
- 54.10 Wash, 40 lks. wide, course SW.
- Asc. 348 ft. over SW slope.
- 68.40 Spur, brs. SE. Continue ascent of 300 ft. over E. slope to
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bedrock, deposit an iron horseshoe at base of post, raise a mound of stone about post, for the cor. of secs. 3, 4, 9 and 10, with brass cap mkd.



1929  
 No bearing trees available.  
 Chisel a cross (X) BO S3 in face of outcropping ledge, which brs. N.45°E., 10 lks. dist.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and desert brush.


Survey of the Subdivision Lines of T.9 N., R.4 W.

chains

16.28 East, on a random line, bet. secs. 3 and 10.  
 Triangulation point "A".  
 Continue chaining.  
 40.00 Set temp. & sec. cor.  
 43.00 Top of spur, bearing SW. Beyond this point the slopes are broken and covered with huge granite boulders, therefore discontinue chaining and triangulate measurement to a point ahead on random line as described as follows and illustrated on the accompanying diagram.

Set a flag ahead on random line on top of a high, rocky ridge, bearing N. and S.  
 From triangulation point "A" at 16.28 ch. station on random line, measure a base South 10.00 chs. to point "C".  
 From point "C" the flag "B" bears N. 79° 20' E.,  
 From triangulation point "A" the vertical angle to flag "B" is plus 4° 40'.  
 All bearings checked by direct reading of the solar and all angles checked by deflection.

Dist. on random line to point "A" : 16.28 chs. E.  
 Dist. by triangulation "A"-"B" : 53.09 " E.  
 Dist. sec. cor. to flag "B" : 69.37 " E.

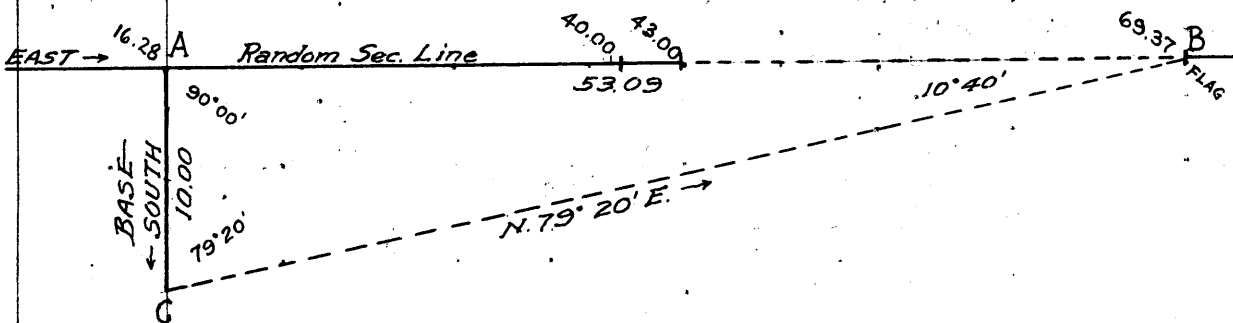


69.37 Triang. flag "B" Continue line and measurement by chaining.  
 80.04 Fall 12 lks. North of the cor. of secs. 2, 3, 10 and 11.



Survey of the Subdivision lines of T.9 N., R14 W. BOOK 3888

Chains	
	Thence, N. 89° 55' W., on true line, bet. secs. 3 and 10. Over mountainous land, thru scattering timber and undergrowth. Asc. 270 ft. over E. slope.
10.67	High, rocky ridge, brs. N. and S. This point is 10 lks. South of triang. flag "B". Discontinue chaining measurement. Across ravine by triangulation as hereinbefore described.
15.00	Desc. about 100 ft. over rough NW slope. (Approximate) rocky wash, 10 lks. wide, course SW. Asc. about 100 ft. over rough SE slope.
37.04	Rocky spur, brs. SW. Thence, across top of spur, continue line and measurement by chaining.
40.02	Set an iron post 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 3 and 10, with brass cap marked



1929

	No bearing trees available.
42.00	Continue over boulder strewn top of spur, bearing SW. NW edge, of spur, brs. NE-SW; Desc. 235 ft. over rough W. slope, to main wash.
48.00	Small wash, 10 lks. wide, course SW. Asc. gradual SE slope.
50.50	Spur, brs. SW. Desc. rough NW slope.
54.80	Wash, 20 lks. wide, course SW. Asc. 264 ft. over SE slope.
63.76	Ridge, brs. N.-S. A point 2 lks. South of triangulation point "A". Thence across nearly level top of ridge, continue line and measurement by chaining.
65.00	Leave ridge top, desc. 50 ft. over SW slope.
70.80	Wash, near head, course S. Asc. 91 ft. over SE slope.
75.35	Rocky spur, brs. S. Desc. 20 ft. over NW slope.
78.75	Head of wash, course S. Asc. 45 ft. over E. slope.
80.04	The cor. of secs. 3, 4, 9 and 10.

Land, mountainous.  
Soil, rocky 4th. rate.  
timber, paloverde and mesquite.  
Undergrowth, cacti, catclaw and greasewood.

	N. 0° 02' W., on true line, bet. secs. 3 and 4. Over mountainous land, thru scattering timber and undergrowth. Asc. 112 ft. over rough SE slope.
3.30	Spur, brs. SW. Desc. 23 ft. over NW slope.
9.30	Wash, near head, course SW. Asc. 238 ft. over SE slope.
16.20	High, rocky spur, brs. S. 70° W. Desc. 121 ft. over NW slope.
23.65	Rocky wash, near head, course W. Asc. 25 ft. over S. slope.
27.69	Spur, brs. NW. Desc. 399 ft. over NE slope.
38.90	Wash, 10 lks. wide, course NW. Asc. 20 ft. over SW slope.
40.00	Set an iron post 3 ft. long, 1 in. in diam., 8 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post for the 1/4 sec. cor. of secs. 3 and 4, with brass cap mkd.




No bearing trees available.

Survey of the Subdivision Lines of T.9 N., R.4 W.

Chains

- Asc. 223 ft. over SW slope.
- 49.60 Rocky spur, 1 ch. wide, brs. NW. Desc. 361 ft. over NE slope.
- 51.80 Rocky wash, 30 lks. wide, course NW. Asc. 213 ft. over SW slope.
- 68.70 Spur, brs. NW. Desc. 183 ft. over NE slope.
- 80.20 Wash, 10 lks. wide, crs. SW. Asc. 20 ft. over SE slope.
- 80.70 Intersect the S. bdy. of sec. 33, T.10 N., R.4 W., at 11.31 chs. West, of the cor. secs. 33 and 34, hereinbefore described.

At point of intersection set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post, for the closing cor. of secs. 3 and 4, with brass cap marked



1929

No bearing trees available.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, mesquite and oak.  
 Undergrowth, cacti, catclaw and desert brush.

From the reestablished std. cor. of secs. 32 and 33, on S. Bdy. of Tp., (2nd. St. Par. N., described in Book "A". N.0°02'W., on true line, bet. secs. 32 and 33.

- Over rolling land, thru scattering timber & undergrowth. Asc. gradual SW slope.
- 8.00 Spur, brs. NW-SE. Across top.
- 10.00 Desc. slight NE slope.
- 12.00 Head of wash, course NE. Asc. gradual SE slope.
- 16.40 Same spur, brs. NW-SW. USBM No. 3187 brs. S.13°05'W. Across top of spur.
- 25.00 Road, brs. NW-SE. Desc. 78 ft. over NE slope.
- 35.00 Enter large wash, 5 chs. wide, at mouth of wash, from W. Thence, along W. edge of same.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 32 and 33, with brass cap marked




1929

from which,  
 a paloverde, 8 ins. in diam., brs. N.79°E., 48 lks. dist., marked 1/4 S 33 BT  
 a paloverde, 8 ins. in diam., brs. N.18°W., 112 lks. dist., marked 1/4 S32 BT

- 41.30 Wash, 10 lks. wide, course SE. Asc. gradual SW slope.
- 43.00 Top of level spur, brs. SE.
- 44.00 Desc. 29 ft. over NE slope.

Survey of the Subdivision Lines of T. 9 N., R. 4 W.

Chains  
 49.00 Wash, 30 lks. wide, course SE. Asc. 51 ft. over SE slope to spur.  
 51.80 Road, brs. NW-SE.  
 54.00 Spur, brs. SE. Desc. gradual NE slope.  
 59.00 Asc. gradual SE slope.  
 61.40 Spur, brs. E. Desc. gradual NE slope.  
 69.00 Enter large wash, course SE.  
 73.00 Leave wash, course SE. Asc. gradual SW slope to  
 80.00 On edge of bench, bearing NW-SE set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post, for the cor. of secs. 28, 29, 32 & 33, with brass cap marked




1929

No bearing trees available.

Land, rolling.  
 Soil, rocky 4th. rate.  
 Timber, mesquite and paloverde.  
 Undergrowth, cacti, catclaw and greasewood.

40.00 East, on random line, bet. secs. 28 and 33.  
 49.90 Set temp.  $\frac{1}{4}$  sec. cor.  
 Fall 5 lks. S. of the cor. of secs. 27, 28, 33 & 34.  
 Thence  
 S. 89° 58' W., on true line, bet. secs. 28 and 33.  
 Over rolling land, thru scattering timber & undergrowth.  
 .50 Small ravine, course SE.  
 6.30 Shallow wash, course S.  
 20.50 Low spur, brs. SW. Desc. 28 ft. over W. slope.  
 26.85 Shallow wash, course S.  
 39.60 Shallow wash, course S.  
 39.95 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the  $\frac{1}{4}$  sec. cor. of secs. 28 & 33, with brass cap marked



1929

No bearing trees available; raise a mound of stone 3 ft. base, 2 ft. high N. of cor. 3 ft. distant.

49.80 Center of wash, 150 lks. wide, course S.  
 54.50 Shallow wash, course SE.  
 61.60 Low spur, brs. SW.  
 66.50 Small wash, course SW.  
 75.30 Shallow wash, course S.  
 79.90 The cor. of secs. 28, 29, 32 & 33.

Land, rolling.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and greasewood.

Survey of the Subdivision Lines of T. 9 N., R. 4 W.

Chains

N.0°02'W., on true line, bet. secs. 28 and 29.  
 Over rolling land, thru scattering timber & undergrowth.  
 Over level spur top.  
 15.00 Leave top, desc. 20 ft. over NW slope.  
 18.50 Wash, 20 lks. wide, course S.10°W. Asc. 29 ft. over S. slope.  
 19.90 Point of spur, brs. SE. Desc. 15 ft. over NW slope.  
 22.10 Same wash, course S.10°E. Asc. gradual S. slope.  
 24.90 Spur, brs. W. Over rolling land.  
 29.90 Shallow wash, course S.50°W. Asc. 23 ft. over SE slope.  
 37.50 Spur, brs. S.20°W. Desc. gradual NW slope to  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, raise a mound of stone about post for the 1/4 sec. cor. of secs. 28 and 29, with brass cap mkd.

S29	S28
-----	-----

1929 from which,  
 a paloverde, 6 ins. in diam., brs. N.41°E., 19 lks. dist., mkd. S28 BT  
 a paloverde, 6 ins. in diam., brs. N.6 1/2°W., 125 lks. dist., mkd. S29 BT

41.00 Wash, 10 lks. wide, course SW.  
 47.00 Spur, brs. S.40°W. Desc. 15 ft. over NW slope.  
 53.80 Wash, 10 lks. wide, course S.10°W. Asc. 23 ft. over SE slope.  
 60.80 Spur, brs. SW. Desc. 25 ft. over NW slope.  
 68.05 Wash, 50 lks. wide, course SW. Asc. 23 ft. over SE slope.  
 72.20 Spur, brs. SW. Asc. gradually along W. slope to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock; raise a mound of stone about post for the cor. of secs. 20, 21, 28 and 29, with brass cap marked

T9N	R4W
S20	S21
S29	S28

1929 from which,  
 a paloverde, 6 ins. in diam., brs. N.79°W., 79 lks. dist., mkd. T9N R4W S20 BT  
 a paloverde, 6 ins. in diam., brs. N.80°E., 60 lks. dist., mkd. T9N R4W S21 BT  
 a paloverde, 6 ins. in diam., brs. S.5°W., 175 lks. dist., mkd. T9N R4W S29 BT  
 a paloverde, 4 ins. in diam., brs. S.26°E., 27 lks. dist., mkd. T9N R4W S28 BT


Land, rolling.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and greasewood.

40.00 N.89°58'E., on random line, bet. secs. 21 and 28.  
 80.06 Set temp. 1/4 sec. cor. Fall 16 lks. N. of the cor. of secs. 21, 22, 27 and 28. Thence,  
 N.89°55'W., on true line, bet. secs. 21 and 28.  
 Over rolling land, thru scattering timber & undergrowth.  
 2.50 W. edge of spur, brs. S. Desc. 20 ft. over W. slope.

Survey of the Subdivision Lines of T. 9 N. R. 4 W.

Chains

6.95 Enter wash, course S.  
 11.50 Leave wash, course S. Asc. 20 ft. over E. slope.  
 14.30m Spur, brs. S. Desc. gradual W. slope.  
 20.20 Wash. 50 lks. wide, course SE. Asc. 43 ft. over E. slope.  
 24.60 Spur, brs. S. Desc. 29 ft. over W. slope.  
 28.35 Wash. 10 lks. wide, near head, course S.  
 Asc. 43 ft. over E. slope.  
 35.00 Spur, brs. S.20°W. Desc. 52 ft. over W. slope.  
 40.03 Set an iron post 3 ft. long, 1 in. in diam., 16 ins. in  
 the ground to bedrock, deposit 3 No. 12 penny nails  
 at base of post, raise a mound of stone about post,  
 for the 1/4 sec. cor. of secs. 21 and 28, with brass  
 cap marked




1929

No bearing trees available.  
 Desc. 8 ft. over E. slope.  
 43.80 Wash. 20 lks. wide, course S. Asc. 100 ft. over E. slope.  
 50.20 Spur, brs. S.10°W. Desc. 31 ft. over W. slope.  
 57.70m Wash. 15 lks. wide, course S. Asc. 37 ft. over E. slope.  
 63.00 Spur, brs. S. Desc. Desc. 17 ft. over W. slope.  
 64.50 Enter wash, course S.  
 68.40 Leave wash, course S. Asc. gradual E. slope.  
 70.00 Spur, brs. S. Desc. gradual W. slope.  
 76.50 Wash. 20 lks. wide, course S.20°W.  
 Asc. 37 ft. over E. slope.  
 78.90 Spur, brs. S. Desc. slight W. slope to  
 80.06 The cor. of secs. 20, 21, 28 and 29.

Land, rolling.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and greasewood.

N.0°02'W., on true line, bet. secs. 20 and 21.  
 Over rolling land, thru scattering timber & undergrowth.  
 Desc. 19 ft. over NW slope.  
 8.90 Wash. 10 lks. wide, course S.20°W.  
 Asc. 69 ft. over SE slope.  
 22.00 Spur, brs. SW. Desc. 76 ft. over NW slope.  
 30.60 Enter wash, course SW.  
 33.20 Leave wash, course SW. Asc. 29 ft. over SE slope to  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 12 ins. in  
 the ground to bedrock, raise a mound of stone about  
 post, for the 1/4 sec. cor. of secs. 20 and 21, with  
 brass cap marked



1929

from which,  
 a paloverde, .6 ins. in diam., brs. S.43 1/2°E., 8 lks.  
 dist., mkd. 1/4 S21 BT  
 a paloverde, 6 ins. in diam., brs. N.31°W., 119 lks.  
 dist., mkd. 1/4 S20 BT  
 Asc. 23 ft. over SE slope.  
 45.00 Spur, brs. S.10°W. Asc. 49 ft. along SE. slope, of same  
 spur.  
 59.50 Same spur, brs. SW. Desc. 91 ft. over NW slope.

Survey of the Subdivision Lines of T. 9 N., R. 4 W.

Chains

65.40 Wash, 50 lks. wide, course S.35°W. Asc., 37 ft. over SE slope.  
 74.00 Road, brs., NE-SW; on spur, bearing NE-to SW. Desc. 36 ft. over NW slope.  
 77.40 Wash, 50 lks. wide, course S.50°W. Asc. gradual SE slope to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in the ground for the cor. of secs. 16, 17, 20 and 21, with brass cap mkd.

T9N	R4W
S17	S16
S20	S21

1929

No bearing trees available; raise a mound of stone 3 ft. base, 2 ft. high W. of cor. 3 ft. dist.

Land, rolling.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and desert brush.

40.00 S. 89°55'E., on random line, bet. secs. 16 and 21. Set temp.  $\frac{1}{4}$  sec. cor.  
 79.92 Fall 5 lks. S. of the cor. of secs. 15, 16, 21 and 22. Thence, N. 89°57'W., on true line, bet. secs. 16 and 21. Over mountainous land, thru scattering timber & undergrowth. Asc. slight SE slope.  
 0.20 Spur, brs. S.30°W. Desc. 112 ft. over NW slope.  
 3.30 Wash, 50 lks. wide, course S.20°W. Asc. 86 ft. over E. slope.  
 19.00 Spur, brs. S. Along level S. slope.  
 22.00 Spur, brs. SW. Desc. 139 ft. over NW slope.  
 38.96 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for witness cor. to the  $\frac{1}{4}$  sec. cor. of secs. 16 and 21, with brass cap marked.

WC  $\frac{1}{4}$  S 16  
 S 21.

1929

No bearing trees available.

Desc. slight NW slope.  
 39.96 True point for the  $\frac{1}{4}$  sec. cor. falls in wash, 10 lks. wide, course S. Asc. 92 ft. over rocky E. slope.  
 46.70 Spur, brs. SW. Desc. 139 ft. over NW slope.  
 51.08 Power line, brs. N.42 $\frac{1}{2}$ °W-S.42 $\frac{1}{2}$ °E.  
 59.80 Wash, 10 lks. wide, course S.60°W. Leave mountainous and enter rolling land.  
 67.60 Road, brs. N.10°E-S.10°W., on low spur, brs. SW.  
 79.30 Wash, 70 lks. wide, course S.35°W. Asc. gradual E. slope to  
 79.92 The cor. of secs. 16, 17, 20 and 21.

Land, mountainous and rolling.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and greasewood.

Survey of the Subdivision Lines of T. 9 N., R. 4 W.

Chains

N.0°02'W., on true line, bet. secs. 16 and 17.  
 Over mountainous land, thru scattering timber & undergrowth.  
 Asc. 34 ft. over SE slope.

5.50 Spur, brs. SW., Asc. 85 ft. over W. slope of spur.

12.00 Junction of spurs, from NE to SW and S.10°E. Desc. 58 ft. over NW slope.

12.40 A point from which, Goat shed brs. N.69°E. House brs. N.42½°E. about 20 chs. dist.

18.15 Wash, 10 lks. wide, course S.35°W. Asc. slight SE slope.

19.20 Spur, brs. S.35°W. Desc. gradual NW slope.

19.80 Small wash, course S.10°W. Asc. 23 ft. over SE slope.

24.15 Spur, brs. SW. Thence over slightly rolling W. slope.


31.26 Power line, brs. N.42½°W-S.42½°E.  
 Desc. 39 ft. over N. slope.

33.10 Wash, 50 lks. wide, course W. Asc. 17 ft. over S. slope.

34.90 Spur, near end, brs. W. Desc. 19 ft. over NW slope.

36.40 Wash, 30 lks. wide, course S.20°W. Asc. 40 ft. over S. slope to

40.00 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post, for the ¼ sec. cor. of secs. 16 and 17, with brass cap mkd.



1929

from which,

a paloverde, 8 ins. in diam. 1 brs. N.16½°W., 29 lks. dist., mkd. ¼ S17 BT

a paloverde, 6 ins. in diam., brs. S.53½°E., 34 lks. dist., mkd. ¼ S16 BT

Asc. 34 ft. over S. slope.

42.00 Spur, brs. SW. over well brs. S.64½°E. Goat shed brs. S.55°E.

42.00 Desc. 57 ft. over NW slope.

49.40 Wash, 10 lks. wide, course SW. Asc. 30 ft. over SE slope.

53.15 Spur, brs. SW. Desc. 32 ft. over NW slope.


55.30 Wash, 10 lks. wide, course SW. Asc. 57 ft. over S. slope.

63.50 Spur, brs. SW. Desc. 66 ft. over NW slope.

69.40 Wash, 50 lks. wide, course SW. Asc. 54 ft. over SE slope.

78.80 Spur, brs. SW. Desc. 13 ft. over N. slope.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in the ground for the cor. of secs. 8, 9, 16 and 17, with brass cap mkd.



1929

No bearing trees available; raise a mound of stone 4 ft. base, 2 ft. high W. of cor. 3 ft. distant.

Land, mountainous and rolling.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catelaw and greasewood.

-----

40.00 S.89°57'E., on random line, bet. secs. 9 and 16.  
 Set temp. ¼ sec. cor.

80.02 Fall 7 lks. S. of the cor. of secs. 9, 10, 15 and 16.  
 Thence,

Survey of the Subdivision Lines of T. 9 N., R. 4 W.

Chains West, on true line, bet. secs. 9 and 16.  
 Over mountainous land, thru scattering timber & under-  
 growth. Asc. 11 ft. over E. slope

1.80 Short spur, brs. S. Desc. 34 ft. over SW. slope.  
 3.60 Wash, 10 lks. wide, course S. Asc. 92 ft. over SE. slope.  
 5.20 Trail, brs. NW-SE.  
 18.10 Spur, brs. SE. Desc. 34 ft. over SW slope.  
 19.90 Head of wash, course S. Asc. 11 ft. over SE slope.  
 25.00 Spur, brs. SW. From which,  
 a spring, brs. S. 37° 50' W. Same spring noted bet. secs. 16-17.  
 USBM 3530 brs. S. 45° E.  
 Desc. 188 ft. over W. slope.

38.45 Wash, 20 lks. wide, course S. Asc. 23 ft. over E. slope to  
 40.01 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in  
 the ground to bedrock, deposit a stone marked with  
 a cross (X) at base of post, raise a mound of stone  
 about post, for the 1/4 sec. cor. of secs. 9 and 16, with  
 brass cap mkd.

s9

s16

1929

No bearing trees available.

Asc. gradual E. slope. Enter rolling land.

42.90 Edge of spur, brs. SW: across level top.  
 46.00 Leave spur, desc. 30 ft. over W. slope.  
 50.30 Wash, 10 lks. wide, course SE. Asc. gradual SE slope.  
 53.80 Spur, brs. S. Desc. 34 ft. over W. slope.  
 55.80 Wash, 10 lks. wide, course S.  
 Asc. 35 ft. over E. slope.  
 58.60 Rocky spur, brs. S. Desc. 81 ft. over W. slope.  
 67.60 Wash, 1 ch. wide, course SW. Asc. 30 ft. over SE slope.  
 78.00 Spur, brs. S. Desc. gradual W. slope to  
 80.02 The cor. of secs. 8, 9, 16 and 17.

Land, mountainous and rolling.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and greasewood.

N.0°02'W., on true line, bet. secs. 8 and 9.  
 Over mountainous land, thru scattering timber & under-  
 growth.

Desc. 68 ft. over NW slope.

8.00 Wash, 20 lks. wide, course SW. Asc. 40 ft. over SE slope.  
 13.50 Spur, brs. SW. Desc. 42 ft. over N. slope.  
 16.00 Wash, 10 lks. wide, course SW. Asc. gradual SE slope.  
 18.50 Short spur, brs. SW. Desc. 39 ft. over N. slope.  
 23.60 Wash, 10 lks. wide, course SW. Asc. 29 ft. over SE slope.  
 26.25 Trail, brs. E-W.  
 32.50 Spur, brs. SW. Desc. gradual NW slope.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 8 ins. in  
 the ground to bedrock, deposit a stone mkd. with a cross  
 (X) at base of post, raise a mound of stone about post,  
 for the 1/4 sec. cor. of secs. 8 and 9, with brass cap  
 mkd.

s8

s9

1929

No bearing trees available.



Survey of the Subdivision Lines of T. 9 N., R. 4 W.

Chains

44.70 Desc. gradual NW slope.  
 50.60 Wash, .10 lks. wide, course SW. Asc. 90 ft. over SE slope.  
 Spur, brs. SW. From which,  
 a windmill at well, brs. S. 54° W., about 25 chs. dist.  
 Desc. .75 ft. over NW slope, to wash.  
 60.35 Rock wall, 4 ft. high, brs. NW-SE.  
 62.00 Wash, 30 lks. wide, course SW. Asc. gradual SE slope.  
 63.20 Road, brs. NE-SW.  
 65.40 Rock wall, brs. NW and SW.  
 66.20 Rock wall, brs. NE-SW. Desc. gradual NE slope.  
 68.00 Wash, 1 ch. wide, course SW. Asc. gradual SE slope.  
 73.60 House, brs. S. 45° E., about 250 lks. dist. to house.  
 Desc. gradual NE slope.  
 79.30 Stone wall, brs. NW-SE.  
 79.00 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in  
 the ground to bedrock, deposit a stone mkd. with a cross  
 (X) at base of post, raise a mound of stone about post,  
 for witness cor. to cor. of secs. 4, 5, 8 and 9, with brass  
 cap mkd.

W C	
T9N	R4W.
S5	S4
S8	S9

1929

No bearing trees available.

A well of good water, brs. SE about 2 chs. dist.

80.00 Desc. 10 ft. over NE slope.  
 True point for the cor. of secs. 4, 5, 8 and 9, falls in  
 center of wash, 30 lks. wide, course SE, where it is  
 impracticable to monument the corner therefore estab-  
 lish witness cor. as hereinbefore described.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and greasewood.

40.00 From true point for cor. of secs. 4, 5, 8 and 9,  
 East, on random line, bet. secs. 4 and 9.  
 79.84 Set temp. 1/4 sec. cor.  
 Fall 20 lks. N. of the cor. of secs. 3, 4, 9 and 10.  
 Thence,  
 N. 89° 51' W., on true line, bet. secs. 4 and 9.  
 Over mountainous land, thru scattering timber & under-  
 growth.  
 Asc. 16 ft. over SE slope.  
 1.50 Rocky spur, brs. S. Desc. 276 ft. over NW slope.  
 20.50 Rocky gulch, course SW. Asc. 35 ft. over SE slope.  
 18.20 Spur, brs. SW. Desc. 234 ft. over NW slope.  
 26.60 Wash, 10 lks. wide, course SW. Asc. 28 ft. over SE slope.  
 30.00 Spur, brs. SW. Desc. 219 ft. over NW slope.  
 35.00 Rocky gulch, course SW. Asc. 20 ft. over SE slope.  
 39.30 Spur, brs. S. Desc. 10 ft. over S. slope.  
 39.97 Set an iron post 3 ft. long, 1 in. in diam., 6 ins. in  
 the ground to bedrock, deposit a stone mkd. with a  
 cross (X) at base of post, raise a mound of stone  
 about post, for the true sec. cor. of secs. 4 and 9,  
 with brass cap mkd.

1/4	S 4
	S 9

1929

No bearing trees available.

Survey of the Subdivision Lines of T. 9 N., R. 4 W.

Chains

- 47.80 Desc. gradually over S. slope.
- 60.90 Spur, brs. SW. Desc. 243 ft. over NW slope.
- 64.30 Wash, 10 lks. wide, course SW. Asc. 13 ft. over SE slope.
- 70.00 Spur, brs. SW. Desc. 23 ft. over NW slope.
- 71.60 Wash, 10 lks. wide, course SW. Asc. 15 ft. over SE slope.
- 78.70 Spur, brs. SW. Desc. 92 ft. over NW slope.
- 79.84 Trail, brs. N-S.
- 79.84 The true point for cor. of secs. 4, 5, 8 and 9.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, none.  
 Undergrowth, cacti, catclaw and paloverde.


-----  
 From true point for cor. of secs. 4, 5, 8 and 9,  
 N.0°02'W., on true line, bet. secs. 4 and 5.  
 Over mountainous land, thru scattering timber & under-  
 growth.

- 11.50 Asc. 36 ft. over SW slope, along E. side of wash.
- 18.30 Mouth of wash, from NE. Asc. 125 ft. over W. slope.
- 22.70 Continue over SW slope, to spur.
- 23.40 Wire fence, brs. E-W.
- 23.40 Spur, brs. SW. Desc. 18 ft. over NW slope to wash.
- 30.00 Rock fence, brs. NE-SW.
- 33.40 Wash, 50 lks. wide, course SW. Over rolling SW slope.
- 39.00 Wash, 20 lks. wide, course SW. Asc. gradual SE slope to
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in  
 the ground to bedrock, raise a mound of stone about  
 post for the 1/4 sec. cor. of secs. 4 and 5, with brass  
 cap mkd.



1929 from which,  
 a mesquite, 6 ins. in diam., brs. S.27°E., 11 lks.  
 dist., mkd. 1/4 S4 BT  
 a mesquite, 6 ins. in diam., brs. S.72°W., 74 lks.  
 dist., mkd. 1/4 S5 BT

- 43.62 Asc. 169 ft. over SW slope, to ridge.
- 54.20 Intersect the SE side line ((1-2) of the "Thunderbolt"  
 patented lode mining claim, Min. Sur. No. 1424 at  
 2.84 chs. N.47°25'E., of cor. No. 1 thereof.  
 Across patented mineral land.
- 54.83 Road, brs. NW-SE. Continue ascent of 238 ft.
- 54.83 Intersect the NW side line (3-4) of the "Thunderbolt" pat-  
 ented mining claim, at 6.60 chs. N.47°25'E., of cor.  
 No. 4 thereof. Leave patented mineral land.
- 62.20 Road, brs. NW-SE.
- 69.20 Ridge, brs. NE-SW. Desc. 85 ft. over NW slope to
- 80.55 Intersect the S. Bdy. of sec. 32, T.10 N., R.4 W., at  
 11.25 chs. West, of the cor. of secs. 32 & 33, here-  
 inbefore described.
- At intersection set an iron post, 3 ft. long, 2 ins. in  
 diam., 16 ins. in the ground to bedrock, deposit a  
 stone mkd. with a cross (X) at base of post, for the  
 closing cor. of secs. 4 and 5, with brass cap mkd.



1929  
 No bearing trees available.


Survey of the Subdivision Lines of T.8 N., R.3 W.

Chains

Land, mountainous.  
Soil, rocky 4th. rate.  
Timber, paloverde and mesquite.  
Undergrowth, cacti, catclaw and desert brush.

From the reestablished standard corner of sees. 31 and 32, on the S. Bdy. of Tp., (2nd. Std. Par. N.,) described in book "A", of this Group, N.0°03'W., on true line, bet. sees. 31 and 32. Over mountainous land, thru scattering timber & undergrowth.


- Asc. gradual SE slope.
- 4.00 Spur, brs. SW. Desc. 23 ft. over NW slope.
- 9.50 Wash, 50 lks. wide, course SW. Asc. 75 ft. over SE slope.
- 19.50 Spur, brs. SW. Asc. gradually up same.
- 28.50 Leave spur, brs. S. from NE. Desc. 9 ft. over NW slope.
- 30.50 Wash, 20 lks. wide, course SW, at bend from N.10°W. Asc. 82 ft. over W. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, deposit a stone marked with a cross (+) at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of sees. 31 & 32, with brass cap marked



1929

No bearing trees available.

- Asc. 138 ft. over W. slope.
- 44.90 Spur, brs. S.10°W. Continue ascent over SE slope.
- 54.70 Ridge, brs. E. and W. Desc. 46 ft. over N. slope.
- 59.70 Wash, 10 lks. wide, course W. Asc. 80 ft. over S. slope.
- 69.50 Spur, brs. West. Desc. 66 ft. over N. slope.
- 75.50 Wash, 20 lks. wide, course S.80°W. Asc. 46 ft. over S. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, deposit a stone marked with a cross (+) at base of post, raise a mound of stone about post, for the corner of sees. 29, 30, 31 and 32, with brass cap marked



1929

No bearing trees available.

Land, mountainous.  
Soil, rocky 4th. rate.  
Timber, mesquite and paloverde.  
Undergrowth, cacti, catclaw and greasewood.

- 40:00 East, on a random line, bet. secs. 29 and 32. Set temp. 1/4 sec. cor.
- 80.14 Intersect the cor. of secs. 28, 29, 32 and 33. Thence, West, on true line, bet. secs. 29 and 32. Over rolling land, thru scattering timber & undergrowth.

## Survey of the Subdivision Lines of T.8 N., R.5 W.

## Chains

- Desc. 12 ft. over W. slope.  
 2.00 Enter wash, course SE.  
 5.70 Leave wash, course SE.  
 Asc. 15 ft. over E. slope.  
 7.15 Spur, brs. S. Desc. gradual W. slope.  
 10.20 Road, brs. N-S.  
 20.00 Road, brs. N-S.  
 23.10 Shallow wash, course SW. Asc. gradual SE slope.  
 24.80 Spur, brs. S. Desc. 18 ft. over W. slope.  
 28.00 Wash, 20 lks. wide, course SE.  
 Asc. gradual E. slope.  
 29.30 Spur, brs. S. Road, on same brs. N-S.  
 29.60 Enter wash, course S. Across sandy bottom.  
 31.60 Leave wash, course S. Over level bottomland.  
 34.30 Leave bottom, asc. 34 ft. over E. slope to  
 39.07 Spur, brs. NE. Set an iron post 3 ft. long, 1 in. in  
 diam., 20 ins. in the ground to bedrock, deposit a  
 stone marked with a cross (+) at base of post, raise  
 a mound of stone about post, for the witness cor. to  
 $\frac{1}{4}$  sec. cor. of secs. 29 and 32, with brass cap  
 marked  


$$\begin{array}{r} \text{WC} \quad \frac{1}{4} \text{ S } 29 \\ \hline \text{S } 32 \end{array}$$
- 1929
- No bearing trees available.
- 40.07 Desc. gradual NW slope.  
 True point for the  $\frac{1}{4}$  sec. cor. secs. 29 and 32 falls in  
 bottom of wash, 10 lks. wide, course NE, where it is  
 impracticable to monument the corner, establish wit-  
 ness cor. as hereinbefore described.  
 Asc. 300 ft. over NE slope.  
 59.50 Ridge, brs. NW and S. Desc. 23 ft. over W. slope.  
 61.00 Head of wash, course S. 80° W. Continue on gradual desc.  
 over S. slope to  
 80.14 The cor. of secs. 29, 30, 31 and 32.  
 Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and greasewood.
- 
- West, on true line, bet. secs. 30 and 31.  
 Over mountainous land, thru scattering timber & under-  
 growth.  
 Desc. gradual S. slope.  
 21.00 Spur, brs. SW. Desc. 105 ft. over NW slope.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 14 ins. in  
 the ground to bedrock, deposit a stone marked with a  
 cross (+) at base of post, raise a mound of stone  
 about post, for the  $\frac{1}{4}$  sec. cor. of secs. 30 and 31,  
 with brass cap marked  

$$\begin{array}{r} \frac{1}{4} \text{ S } 30 \\ \hline \text{S } 31 \end{array}$$
- 1929
- No bearing trees available.
- 43.40 Desc. 32 ft. over NW slope.  
 Wash, 10 lks. wide, course SW. Asc. 12 ft. over SE slope.  
 47.10 Spur, brs. SW. Desc. 20 ft. over NW slope.  
 50.20 Intersect the E. Bdy. of T.9 N., R.5 W., at 2.50 chs.  
 S. of the cor. of secs. 25, 30, 31 & 36, which is an

Survey of the Subdivision Lines of T.9 N., R.4 W.


Chains

iron post 2 ins. in diam., firmly set, projecting 12 ins. above ground, with brass cap properly mkd. and witnessed by a mound of stone west of cor. Alter this cor. monument to refer to secs. 25 and 36 only, by changing markings on brass cap to read




1916-29

Alter the 1/4 sec. cors. of secs. 31 and 36 and 25 and 30 to refer to secs. 36 and 25 only by changing markings on brass caps to read




At above point of intersection set an iron post 3 ft. long 2 ins. in diam., 26 ins. in the ground, for the closing cor. secs. 30 and 31, with brass cap mkd.



1929

No bearing trees available; raise a mound of stone 4 ft. base, 1 1/2 ft. high E. of cor. 3 ft. dist. Land, mountainous. Soil, rocky 4th. rate. Timber, paloverde and mesquite. Undergrowth, cacti, catclaw and greasewood.


- From cor. secs. 29, 30, 31 and 32, N.0°03'W., on true line, bet. secs. 29 and 30. Over mountainous land, thru scattering timber & undergrowth. Asc. 29 ft. over S. slope.
- 1.40 Spur, brs. W. Desc. 47 ft. over N. slope.
- 14.50 Wash, 10 lks. wide, course SW. Asc. 74 ft. over SE slope.
- 22.30 Spur, brs. SW. Asc. 23 ft. over W. slope.
- 32.00 Ridge, brs. SE. Desc. 66 ft. over N. slope.
- 40.00 Saddle, brs. E-W. Set an iron post 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, raise a mound of stone about post, for the 1/4 sec. cor. secs. 29 and 30, with brass cap mkd.



1929

from which, a mesquite, 6 ins. in diam., brs. N.46 1/2°W., 21 lks. dist., mkd. 1/4 S30 BT a mesquite, 4 ins. in diam., brs. N.57 1/2°E., 63 lks. dist., mkd. 1/4 S29 BT

- Asc. 20 ft. over SE slope, leaving ridge to NW.
- 43.40 Desc. 137 ft. over NE slope.
- 66.60 Foot of descent; thence over level land.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, deposit 2-8d. nails at base of post, raise a mound of stone about post, for the cor. of secs. 19, 20, 29 and 30, with brass cap mkd.



1929


from which, a mesquite, 4 ins. in diam., brs. N.54°W., 32 lks. dist., marked BT only.

Survey of the Subdivision Lines of T.9 N., R.4 W.

chains

a mesquite, 9 ins. in diam., brs. S.13 $\frac{1}{4}$ °E., 264 lks.  
 dist., mkd.  $\frac{1}{4}$ N R4W S29 BT  
 No other bearing trees available.  
 Land, mountainous and level.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and greasewood.


-----  
 East, on random line, bet. secs. 20 and 29.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 30.00 Fall 14 lks. S. of the cor. of secs. 20, 21, 28 and 29.  
 Thence, S. 39°54'W., on true line, bet. secs. 20 and 29.  
 Over rolling land, thru scattering timber & undergrowth.  
 Desc. 30 ft. over gradual W. slope.  
 1.80 Wash, 20 lks. wide, course SW. Asc. 53 ft. over E. slope.  
 7.20 Spur, brs. S. Desc. 45 ft. over W. slope.  
 14.80 Wash, 20 lks. wide, course SW. Asc. 40 ft. over E. slope.  
 18.20 Spur, brs. S. thence across level top.  
 25.80 Lv. top; desc. 54 ft. over W. slope.  
 30.20 Wash, 10 lks. wide, course SW. Asc. 54 ft. over E. slope.  
 34.60 Spur, brs. S. Desc. 40 ft. over W. slope.  
 38.10 Wash, 20 lks. wide, course S. Across draw bottom.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground for the  $\frac{1}{4}$  sec. cor. of secs. 20 and 29, with  
 brass cap mkd.



1929 from which,  
 a mesquite, 10 ins. in diam., brs. N.39°E., 118 lks.  
 dist., mkd.  $\frac{1}{4}$  S 20 BT  
 a mesquite, 4 ins. in diam., brs. S.27 $\frac{1}{2}$ °W., 123 lks.  
 dist., mkd.  $\frac{1}{4}$  S29 BT  
 44.00 Lv. bottom, asc. 46 ft. over E. slope.  
 47.40 Thence, over rolling land.  
 48.50 Road, brs. NW-SE.  
 62.10 Wash, 10 lks. wide, course S. Asc. 36 ft. over E. slope.  
 65.60 Spur, brs. S. Desc. 26 ft. over W. slope.  
 69.20 Wash, 10 lks. wide, course SW. Asc. 49 ft. over E. slope.  
 73.00 Spur, brs. S. Desc. 57 ft. over W. slope.  
 75.00 Enter wash, course S.10°W.  
 76.30 Lv. wash, course S. Asc. 20 ft. over E. slope.  
 80.00 The cor. secs. 19, 20, 29 and 30.

Land, rolling and level.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and greasewood.

-----  
 West, on true line, bet. secs. 19 and 30.  
 Over rolling land, thru scattering timber & undergrowth.  
 10.00 Lv. rolling, enter mountainous land.  
 Asc. 91 ft. over NE slope.  
 19.70 Road, brs. N-S.  
 22.20 Spur, brs. S. Desc. 105 ft. over NW slope.  
 38.60 Wash, 10 lks. wide, course SW. Asc. gradual SE slope to  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in  
 the ground to bedrock, raise a mound of stone about  
 post for the  $\frac{1}{4}$  sec. cor. of secs. 19 and 30, with brass  
 cap mkd.




1929 from which,  
 a paloverde, 6 ins. in diam., brs. N.6 $\frac{1}{4}$ °E., 121 lks.  
 dist., mkd.  $\frac{1}{4}$  S19 BT  
 a mesquite, 8 ins. in diam., brs. S.56°E., 172 lks.  
 dist., mkd.  $\frac{1}{4}$  S30 BT

Survey of the Subdivision Lines of T.9 N., R.4 W.

Chains

Asc. 40 ft. over SE slope.  
 46.00 Spur, brs. SW. Desc. 32 ft. over W. slope.  
 50.12 Intersect the East Bdy. of T.9 N., R.5 W., at 2.45 chs.  
 S. of the cor. secs. 19, 24, 25 and 30, which is an  
 iron post 2 ins. in diam., firmly set, projecting 8 ins.  
 above ground, with brass cap properly mkd. and witnessed  
 by a mound of stone W. of cor. Alter this corner mon-  
 ument to refer to secs. 24 and 25 only by changing  
 markings on brass cap to read




1916-29

Alter the 1/4 sec. cor. secs. 19 and 24 to refer to sec. 24 only, by changing markings on brass cap to read



1916-29

At above point of intersection set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, deposit a piece of iron 2 x 2 ins. at base of post, raise a mound of stone about post for the closing cor. of secs. 19 and 30, with brass cap mkd.



1929

No bearing trees available.

Land, rolling and mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and greasewood.

From cor. of secs. 19, 20, 29 and 30.  
 N.0°03'W., on true line, bet. secs. 19 and 20.  
 Over rolling land, thru scattering timber & undergrowth.  
 3.60 Wash, 1 ch. wide, course SE. Asc. 52 ft. over SW slope.  
 25.00 Desc. along W. slope., 25 ft.  
 34.70 Wash, 10 lks. wide, course SW. Asc. along W. side of same.  
 37.20 Same wash, course SE. Asc. gradually along E. edge of wash.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground for the 1/4 sec. cor. secs. 19 and 20, with  
 brass cap mkd.



1929

from which,

a mesquite, 6 ins. in diam., brs. N.53°W., 36 lks.  
 dist., mkd. 1/4 S19 BT  
 a paloverde, 6 ins. in diam., brs. S.74°E., 206 lks.  
 dist., mkd. 1/4 S20 BT

Thence, over rolling land.

41.00 Wash, 10 lks. wide, course SW.  
 43.50 Same wash, course SE.  
 47.40 Same wash, course SW.  
 54.00 Low spur, brs. SW.  
 56.00 Road, brs. E-W.

Survey of the Subdivision Lines of T. 9 N., R. 4 W.

Chains

68.00  
72.60  
80.00

Wash, at bend from NW-SW.  
Same wash, course SW. Asc. 29 ft. over SE slope to  
Set an iron post 3 ft. long, 2 ins. in diam., 12 ins. in  
the ground to bedrock, deposit a 5 in. strip of iron  
at base of post, raise a mound of stone about post,  
for the cor. of secs. 17, 18, 19 and 20, with brass  
cap marked

T9N	R4W
S18	S17
S19	S20

1929 from which,  
a paloverde, 6 ins. in diam., brs. N.67 $\frac{1}{2}$ °E., 69 lks.  
dist., marked T9N R4W S17 BT  
a paloverde, 8 ins. in diam., brs. S.5°W., 69 lks.  
dist., marked T9N R4W S19 BT  
No other trees available.

Land, rolling.  
Soil, rocky 4th. rate.  
timber, paloverde and mesquite.  
Undergrowth, cacti, catclaw and greasewood.

40.00  
80.06

N.89°54'E., on random line, bet. secs. 17 and 20.  
Set temp.  $\frac{1}{4}$  sec. cor.  
fall 9 lks. N. of the cor. of secs. 16, 17, 20 and 21.  
thence,

3.10  
5.10  
9.80  
16.15  
19.10  
25.45  
28.00  
32.70  
40.03

S.89°58'W., on true line, bet. secs. 17 and 20.  
Over rolling land, thru scattering timber & undergrowth.  
Low spur, brs. S.10°W., Desc. 21 ft. over NW slope.  
Wash, 10 lks. wide, course S. Asc. 23 ft. over SE slope.  
Spur, brs. S.50°W., Desc. gradual NW slope.  
Wash, 30 lks. wide, course S. Asc. gradual E. slope.  
Low spur, brs. S. Desc. 50 ft. over W. slope.  
Wash, 70 lks. wide, course S.10°W., Asc. 75 ft. over  
E. slope.  
Spur, brs. S. Desc. 19 ft. over W. slope.  
Shallow wash, 30 lks. wide, course S. Asc. gradual  
E. slope to  
Set an iron post 3 ft. long, 1 in. in diam., 12 ins. in  
the ground to bedrock, raise a mound of stone about  
post, for the  $\frac{1}{4}$  sec. cor. of secs. 17 and 20, with  
brass cap marked

S 17
$\frac{1}{4}$ S 20

1929 from which,  
a paloverde, 6 ins. in diam., brs. N.48 $\frac{1}{4}$ °E., 71 lks.  
dist., marked  $\frac{1}{4}$  S 17 BT  
a paloverde, 6 ins. in diam., brs. S.8°E., 67 lks.  
dist., marked  $\frac{1}{4}$  S20 BT

40.80  
55.30  
57.00  
62.60  
63.95  
67.60  
77.40  
80.06

Over rolling land.  
Road, brs. N.10°E.-S.10°W. Desc. 37 ft. over W. slope.  
Enter wash, course S.  
Leave wash, course S. Asc. 115 ft. over E. slope.  
Spur, brs. S. Desc. 18 ft. over W. slope.  
Head of wash, course S.10°W., Asc. 20 ft. over E. slope.  
Spur, brs. S. Desc. 17 116 $\frac{3}{8}$  ft. over W. slope.  
Wash, 10 lks. wide, course S.10°W. Asc. gradual SE. slope.  
The cor. of secs. 17, 18, 19 and 20:  
Land, mountainous. Soil, rocky 4th. rate. Undergrowth,  
timber, paloverde. Undergrowth, cacti, catclaw and  
desert brush.




Survey of the subdivision lines of T.9 N., R.4 W. BOOK 3898

Chains


West, on true line, bet. secs. 18 and 19.  
 Over rolling land, thru scattering timber, and undergrowth.  
 Asc. gradual SE slope.

0.50 Spur, brs. SW. Desc. 23 ft. over NW slope.  
 3.50 Wash, 10 lks. wide, course SW. Asc. slight SE slope.  
 12.00 Low spur, brs. SW. Desc. 30 ft. over W. slope.  
 23.20 Center of wash, 1 ch. wide, course SE. Asc. rolling SE slope.  
 25.20 Low spur, brs. SE.; road on same, brs. NW-SE.  
 25.55 Road, brs. NE-SW.  
 29.40 Same road at bend, brs. SE-SW.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the 1/4 sec. cor. of secs. 18 and 19, with brass cap marked




1939. from which,  
 a paloverde, 6 ins. in diam., brs. N.16°W., 121 lks. dist., marked 1/4 S18 BT  
 a paloverde, 6 ins. in diam., brs. S.70°W., 109 lks. dist., marked 1/4 S19 BT.


41.00 Low spur, brs. SE. Desc. gradual SW slope.  
 42.40 Wash, 10 lks. wide, course SE. Asc. 71 ft. over SE slope to  
 50.03 Intersect the East Bdy. of T.9 N., R.5 W., at 2.62 chs. S. of the cor. of secs. 13, 18, 19 and 24, which is an iron post 2 ins. in diam., firmly set and projecting 12 ins. above ground, with brass cap properly marked and witnessed by a mound of stone W. of cor. Alter this cor. monument to refer to secs. 13 and 24 only, by changing markings on brass cap to read:



1916-29  
 Alter the witness cor. to 1/4 sec. cor. secs. 13 & 18, to refer to points for 1/4 sec. cor. of sec. 13 only; by changing the markings on brass cap to read



1916-29  
 At point of intersection above described, set an iron post 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post for the closing corner of secs. 18 and 19, with brass cap marked



1929 No bearing trees available.  
 Land, rolling. Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite. Undergrowth, cacti, cat-claw and greasewood.

Survey of the Subdivision lines of T.9 N., R.4 W.

Chains

from cor. of secs. 17, 18, 19 and 20.  
 N.0°03'W., on true line, bet. secs. 17 and 18.  
 Over rolling land, thru scattering timber & undergrowth.  
 Asc. slight SE slope.  
 1.00 Spur, brs. SW. Desc. 30 ft. over NW slope.  
 7.40 Wash, 30 lks. wide, course S.30°W. Asc. 77 ft. over SE slope.  
 19.30 Spur, brs. SW. Desc. 57 ft. over NW slope.  
 25.80 Wash, 10 lks. wide, course SW. Asc. 81 ft. over SE slope.  
 35.80 Spur, brs. SW. Desc. 80 ft. over NW slope.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground for the  $\frac{1}{4}$  sec. cor. of secs. 17 and 18,  
 with brass cap marked

S18	S17
-----	-----

1929

No bearing trees available.  
 Raise a mound of stone 3 ft. base, 1 $\frac{1}{2}$  ft. high W. of cor.  
 3 ft. distant.

Desc. gradual NW slope.  
 41.10 Wash, 15 lks. wide, course SW.  
 Asc. 97 ft. over SE slope.  
 51.60 Spur, brs. SW. Desc. 46 ft. over SW slope.  
 60.90 Wash, 10 lks. wide, course SW. Asc. 72 ft. over SE slope.  
 67.70 Spur, brs. SW. Desc. 52 ft. over NW slope to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 12 ins. in  
 the ground to bedrock, deposit a stone mkd. with a  
 cross (X) at base of post, raise a mound of stone  
 about post for the cor. of secs. 7, 8, 17 and 18, with  
 brass cap marked

T9N	R4W
S7	S8
S18	S17

1929

from which,  
 a paloverde, 8 ins. in diam., brs. S.31 $\frac{1}{2}$ °E., 111 lks.  
 dist., marked T9N R4W S17 BT  
 No other trees available.

Land, rolling.  
 Soil, rocky 4th. rate.  
 Timber, paloverde, mesquite and ironwood.  
 Undergrowth, cacti, catclaw and greasewood.

40.00 N.89°58'E., on a random line, bet. secs. 8 and 17.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.92 Fall 5 lks. N. of the cor. of secs. 8, 9, 16 and 17.  
 Thence,  
 West on true line, bet. secs. 8 and 17.  
 Over rolling land, thru scattering timber and undergrowth.  
 Desc. 115 ft. over NW slope.  
 7.60 Junction of washes from N.10°W.-N.10°E., thence SW.  
 Asc. 23 ft. over SE slope.  
 10.00 Flat spur, brs. SW. across level land.  
 11.30 Road, brs. N-S.  
 15.00 Lv. bench, brs. N-S. Desc. 53 ft. over W. slope.  
 21.20 Wash, 50 lks. wide, course S.20°E.  
 Asc. 133 ft. over E. slope.  
 27.00 Spur, brs. SW. Desc. gradual W. slope.

Survey of the subdivision lines of T.9 N., R.4 W.

Chains

30.00  
39.00  
39.96

Wash, 10 lks. wide, course SW. Asc. gradual SE slope.  
Top of spur, brs. S. Over level ground to  
Set an iron post 3 ft. long, 1 in. in diam., 12 ins.  
in the ground to bedrock, deposit a horseshoe at  
base of post, raise a mound of stone about post, for  
the 1/4 sec. cor. of secs. 8 and 17, with brass cap  
marked

1/4 S8  
-----  
S17

1929 from which,

a paloverde, 4 ins. in diam., brs. S. 34 1/4° W., 160 lks.  
dist., marked 1/4 S17 BT  
a paloverde, 10 ins. in diam., brs. N. 25 1/2° W., 113 lks.  
dist., marked 1/4 S8 BT

44.10  
49.30  
54.00  
60.90  
72.00  
79.92

Desc. 86 ft. over W. slope.  
Power line, bears NW-SE.  
Wash, 10 lks. wide, course SW. Asc. 46 ft. over SE slope.  
Spur, brs. SW. Desc. 59 ft. over NW slope.  
Wash, 10 lks. wide, course SW. Asc. 99 ft. over SE slope.  
Spur, brs. SW. Desc. 85 ft. over NW slope to  
the cor. of secs. 7, 8, 17 and 18.

Land, rolling.  
Soil, rocky 4th. rate.  
Timber, paloverde and mesquite.  
Undergrowth, caeti, catclaw and greasewood.

2.90  
11.50  
13.00  
18.00  
20.50  
31.00  
33.00  
40.00

West, on true line, bet. secs. 7 and 18.  
Over rolling land, thru scattering timber and undergrowth.  
Desc. 48 ft. over NW slope.

Wash, 50 lks. wide, course S. 10° E., (South 3 chs., thence  
SW.) Asc. 105 ft. over SE slope.

Spur, brs. S.  
Head of wash, course S.  
Spur, brs. S. Desc. 34 ft. over SW slope.  
Wash, 10 lks. wide, course S. 10° E.  
Asc. gradual SE slope.

Over rolling bench land, brs. N-S.  
Road, brs. N-S.  
Set an iron post 3 ft. long, 1 in. in diam., 8 ins. in  
the ground to bedrock, deposit a stone marked with a  
cross (X) at base of post, raise a mound of stone  
about post, for the 1/4 sec. cor. of secs. 7 and 18,  
with brass cap marked

1/4 S7  
-----  
S 18

1929 from which,

a paloverde, 4 ins. in diam., brs. S. 26 1/4° W., 134 lks.  
dist., marked 1/4 S18 BT  
No other bearing tree available.


45.15  
50.06

Desc. 69 ft. over W. slope.  
Wash, 10 lks. wide, course S. Asc. gradual E. slope to  
intersect the east Bdy. of T9N., R.5 W., at 2.44 chs.  
S. of the cor. of secs. 7, 12, 13 and 18, which is  
an iron post 2 ins. in diam., firmly set and pro-  
jecting 14 ins. above ground and mound of stone,  
with brass cap properly marked.


Survey of the Subdivision lines of T.9 N., R.4 W.

Chains


Alter this cor. monument to refer to secs. 12 and 13. only by changing markings on brass cap to read:



Alter the 1/4 sec. cor. of secs. 7 and 12 to refer to sec. 12 only, by changing marks on brass cap to read:



At above point of intersection set an iron post 3 ft. long, 2 ins. in diam., 16 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post, for the closing cor. of secs. 7 and 13, with brass cap mkd.




1929

No bearing trees available.

Land, rolling.  
Soil, rocky 4th. rate.  
Timber, palo verde.  
Undergrowth, cacti, catclaw and greasewood.

From the cor. of secs. 7, 8, 17 and 18.  
N.0°03'W., on true line, bet. secs. 7 and 8.  
Over rolling land, thru scattering timber & undergrowth.  
Desc. gradual NW slope.

- 3.00 Wash, 10 lks. wide, course SW.
- Asc. gradual SE slope.
- 20.00 Spur, brs. SW. Desc. gradual NW slope.
- 26.00 Wash, 40 lks. wide, course SW. Asc. gradual SW slope.
- 38.00 Small wash, course SW. Asc. gradual SE slope.
- 39.80 Power line, brs. NW-SE.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 7 and 8, with brass cap marked



No bearing trees available.

- Asc. 52 ft. over SE slope.
- 46.00 spur, brs. SW. Desc. 49 ft. over NW slope.
- 53.20 Wash, 20 lks. wide, course SW. Asc. 121 ft. over SW slope.
- 73.00 Trail from Octave to Massayampa River, brs. E-W.


Survey of the subdivision lines of T.9 N., R.4 W.

BOOK 3893

Chains

77.90  
80.00

Asc. 64 ft. over SE. slope.  
S. edge of mine dump, over level top to true point for the cor. of secs. 5, 6, 7 and 8, falls on dump where it is impracticable to monument the corner, therefore establish witness corner 2.00 chs. east as follows: set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post, for the witness cor. to cor. of secs. 5, 6, 7 and 8, with brass cap marked



1929

No bearing trees available.  
From true point for cor.,  
USBM 5187 brs. S.1°50'W.  
E. end of mine shop, brs. S.32°W., about 6 chs. dist.  
NE end of row of eight metal tanks, brs. S.46½°W., about 5 chs. distant.  
N.22°W., about 5 chs. to shaft top.  
N.10°18'W., about 5.50 chs. to Powerhouse of mine.  
N.5°27'W., to large mound of stone on Rich Hill.  
S.15°25'W., to Vulcan Peak.  
N.72°35'W., to S. end of Octave Postoffice about 13 chs. distant.

Land, rolling.  
soil, rocky 4th. rate.  
timber, paloverde.  
Undergrowth, cacti, catclaw and greasewood.

40.00  
80.14


From true point for cor. of secs. 5, 6, 7 and 8.  
East, on random line, bet. secs. 5 and 8.  
Set temp. ¼ sec. cor.  
fall 12 lks. N. of true point for cor. of secs. 4, 5, 8 and 9.

8.40  
14.00  
21.00  
35.00

Thence,  
N.89°55'W., on true line, bet. secs. 5 and 8.  
Over mountainous land, thru scattering timber & undergrowth.  
Asc. 167 ft. over E. slope.  
Spur, brs. SE. Desc. 64 ft. over SW slope.  
rocky wash, 10 lks. wide, course SE.  
Asc. 182 ft. over NE slope.  
Spur, brs. SE. Desc. 212 ft. over SW slope.  
wash, 20 lks. wide, course SW.  
Asc. 154 ft. over E. slope.

40.07

Set an iron post 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, deposit a horseshoe at base of post, raise a mound of stone about post, for the ¼ sec. cor. of secs. 5 and 8, with brass cap marked



1929

41.00

No bearing trees available.  
Asc. 13 ft. over E. slope.  
Spur, brs. SW. Desc. 197 ft. over W. slope.

## Survey of the Subdivision lines of T.9 N., R.4 W.

Chains

- 52.50 Wash, 10 lks. wide, course SW.  
Asc. 216 ft. over SE slope.
- 61.25 Intersect the S. side line (2-3) of the "Antelope" pat.  
lode mining claim, Min. Sur. No. 1248, at 3.77 chs.  
N.  $69\frac{1}{2}^{\circ}$  E., from cor. No. 2 thereof; thence across pat.  
mineral land.
- 66.57 Spur, brs. S. From which, USLM No. 1248 bears N. 25 1/2 lks. S.  
dist. the monument is a granite stone 30 x 18 x 6 ins.  
set on West side of a large mound of stone, mkd. USLM  
1248 on W. face.  
Desc. 276 ft. over SW slope to cor.
- 72.81 Intersect the S. side line, (1-2) of the "Grey Devell"  
pat. lode, mining claim, Min. Sur. No. 1248, at 1.58 chs.  
N.  $87^{\circ}$  W., of cor. No. 1 thereof. Leave patented mineral  
land.
- 78.14 The witness cor. to cor. of secs. 5, 6, 7 and 8, herein-  
before described (2.00 chs. east of cor. point.)
- 80.14 true point for cor. secs. 5, 6, 7 and 8.
- Land, mountainous.  
Soil, rocky 4th. rate.  
Timber, paloverde and mesquite.  
Undergrowth, cacti, catclaw and greasewood.
- 
- From true point for cor. secs. 5, 6, 7 and 8.  
West, on true line, bet. secs. 6 and 7.  
Over rolling land, thru scattering timber & undergrowth.
- 0.30 Desc. over SW slope of mine dump.
- 2.80 Foot of descent; wash, 20 lks. wide, course S. Asc. slight  
E. slope.
- 5.80 Road, brs. N-S. Mill brs. N. about 150 lks. dist.
- 5.10 Power line, brs. N-S.
- 5.40 Spur, brs. S. Same road, brs. NW-SE. Desc. slight W.  
slope.
- 7.90 Frame house on line.
- 11.00 Wash, 20 lks. wide, course S. Asc. gradual SE slope.
- 11.10 Road, brs. NE-SW.
- 11.50 E. edge of ridge, brs. N-S. Over level land. House on line.
- 12.90 Main street of Octave, brs. N.  $26^{\circ}$  E., S.  $26^{\circ}$  W.  
Houses on either side of street extend Northeasterly &  
southwesterly about 10 chs.
- 15.20 Leave spur; desc. 100 ft. over W. slope to wash.
- 15.60 Road, brs. NW-SE.
- 19.00 Wash, 20 lks. wide, course S. Asc. 111 ft. over E. slope.
- 21.80 Road, brs. NE-SW.
- 23.00 Spur, brs. SW; over level land.
- 24.00 Same road, brs. NW-SE.
- 29.70 Road, brs. NW-SE.
- 32.00 Desc. gradual W. slope.
- 35.40 Power line, brs. NW-SE.
- 38.60 Part of Weaver Wash, 40 lks. wide, 4 ft. deep, course S.
- 39.00 Asc. 8 ft. over E. slope.
- 40.00 On low spur, which brs. S., set an iron post 5 ft. long,  
1 in. in diam., 10 ins. in the ground, to bedrock,  
deposit a stone marked with a cross (X) at base of  
post, raise a mound of stone about post, for the  $\frac{1}{4}$   
sec. cor. of secs. 6 and 7, with brass cap marked

Survey of the Subdivision lines of T.9 N., R.4 W.

Chains


No bearing trees available.

41.00 Enter main part of Weaver Wash, 640 lks. wide, 4 ft. deep course S.

47.40 Leave wash bottom, asc. gradual E. slope 23 ft. to


50.04 Intersect the east bdy. of T.9 N., R.5 W., at 2.65 chs. S. of the cor. of secs. 1, 6, 7 and 12, which is an iron post 2 ins. in diam., firmly set, and projecting 12 ins. above the ground and mound of stone, with brass cap properly marked.

Alter this cor. monument to refer to secs. 1 and 12 only by changing markings on brass cap to read



1916-29

At above point of intersection set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, deposit a bottle at base of post, raise a mound of stone about post, for the closing corner of secs. 6 and 7 with brass cap marked




1929

No bearing trees available.

Land, rolling.  
Soil, rocky 4th. rate.  
timber, paloverde and mesquite.  
Undergrowth, cacti, catclaw and greasewood.

Alter the 1/4 sec. cor. of secs. land 6 to refer to sec. 1 only, by changing markings on brass cap to read



1916-29

From true point for the cor. of secs. 5, 6, 7 and 8. N70°03'W, on true line, bet. secs. 5 and 6. Over rolling land, thru scattering timber & undergrowth. Intersect the south side line of the "Grey Devell" pat. lode mining claim, Min. Sur. No. 1248, at 8.92 chs. N.87°00'W., of cor. No. 1 thereof.

0.36

Thence, across patented land.

2.80 Leave mine dump; over level solid ground.

4.00 Barn on line; powerhouse of Octave mine, brs. W. about 2 chs. distant. Lv. level land; asc. gradual SW slope.

7.40 Old mine road, brs. E-W. on spur bearing west. Desc. 40 ft. over NW slope.

8.31 Intersect the N. side line of the "Grey Devell" pat. lode mining claim at 6.43 chs. N.86°W., of cor. No. 4 thereof. Lv. patented land.

Survey of the Subdivision lines of T.9 N., R.4 W.

Chains


17.80 Wash, 20 lks. wide, course SW.  
 29.60 Main wash, 30 lks. wide, course SW. Asc. gradual SE slope.  
 34.62 Intersect the SE side line of the "New Weaver" pat. placer claim at 12.54 chs. N.36°31'E., of cor. No. 4 thereof. Across patented land, Mineral Survey No. 3853.  
 37.40 E. edge of reservoir; about 1½ chs. in diam.  
 38.60 N. " " " "  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit a glass bottle at base of post, raise a mound of stone about post, for the ¼ sec. cor. of secs. 5 and 6, with brass cap marked



1929

No bearing trees available.  
 From which,  
 a house, brs. S.64°40'W., about 35 chs.  
 a house, brs. N.12°E., about 20 chs.  
 USBM 3187 in T8N R4W brs. S.1°45'E.,

41.60 Road, brs. NE-SW.  
 45.00 Desc. 40 ft. over NW slope.  
 52.79 In bottom of Weaver Wash, which course is SW, intersect the NW end line of the "Daisy" pat. placer claim at 1.55 chs. S.57°20'W., of cor. No. 2 thereof. Lv. patented land, Asc. across rocky bottom of Weaver Wash.  
 66.20 Lv. bottom, asc. 40 ft. over SE slope.  
 72.00 Across mined ground to  
 80.40 Intersect the S. Bdy. of T.10 N., R.4 W. at 11.41 chs. west of cor. secs. 31 and 32, hereinbefore described. At point of intersection set an iron post 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post for the closing corner of secs. 5 and 6, with brass cap marked



1929

No bearing trees available.

Land, rolling.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and greasewood.



Retracement of Patented Mining Claims in  
secs. 4, 5, 6 and 8, T.9N., R.4W. and sec. 33, T.10N., R.4W.

Chains	Mineral Survey No. 1248 in secs. 5, 6 and 8.
	Beginning at Cor. No. 2 of the "Dun Billy," pat. lode mining claim, in sec. 6.
22.24	N. $88\frac{1}{2}^{\circ}$ E., on a random line, on the S. side line of claim. Intersect Cor. No. 1. True course and dist. of the S. side line are therefore S. $88\frac{1}{2}^{\circ}$ W., 22.24 chs.
	Thence, S. $87^{\circ}$ E., on a random line, on the S. side line of the "Grey Devell" claim.
18.13	Intersect Cor. No. 1. True course and dist. of the S. side line are therefore N. $87^{\circ}$ W., 18.13 chs.
	Thence, S. $78^{\circ}43'$ E., on a random line, on part of S. side line of the "Antelope" claim.
6.60	Intersect Cor. No. 2. True course and dist. of W. part of S. side line are therefore S. $78^{\circ}43'$ E., 6.60 chs.
	Thence, N. $69\frac{1}{2}^{\circ}$ E., on a random line, on part of S. side line of "Antelope" claim.
16.00	Intersect Cor. No. 3. True course & dist. of E. part of S. side line are therefore N. $69\frac{1}{2}^{\circ}$ E., 16.00 chs.
	Thence, N. $69\frac{1}{2}^{\circ}$ E., on a random line, on SE side line of the "Antelope" claim.
	From Cor. No. 3 of the "Antelope" claim Min. Sur. No. 1248, Thence, N. $62\frac{1}{2}^{\circ}$ E., on a random line, on the SE side line of the "Golden Rod" claim.
20.70	Intersect Cor. No. 2. True course and dist. of the SE side line are therefore N. $62\frac{1}{2}^{\circ}$ E., 20.70 chs.
	Thence, N. $75^{\circ}40'$ E., on a random line, on part of the SE side line of the "Uncle Sam" claim.
10.65	Intersect Cor. No. 2. True course & dist. of SW. part of the SE side line are therefore N. $75^{\circ}40'$ E., 10.65 chs.
	Thence, N. $26^{\circ}45'$ E., on a random line, on part of the SE side line.
9.20	Intersect Cor. No. 3. True course & dist. of NE. part of the SE. side line are therefore N. $26^{\circ}45'$ E., 9.20 chs.
	<u>Mineral Survey NO. 1423</u> in sec. 5.
	From Cor. No. 3 of the "Uncle Sam" (Min. Sur. No. 1310), also Cor. No. 1 of the "New Era" pat. claim. M.S. 1423;
22.60	Thence, N. $42^{\circ}$ E., on SE side line of "New Era" claim. Intersect Cor. No. 2. True course and dist. of the SE. side line, are therefore N. $42^{\circ}$ E., 22.60 chs.
	<u>Mineral Survey No. 1424</u> in secs. 4 and 5.
	From Cor. No. 2 of the "New Era" claim (M.S. No. 1423), also Cor. No. 1 of the "Thunderbolt" claim (M.S. 1424);
22.80	Thence, N. $47^{\circ}25'$ E., on a random line, on the SE side line of "Thunderbolt" claim.
19.96	Intersect Cor. No. 2 of the claim. True course & dist. of the SE side line are therefore N. $47^{\circ}25'$ E., 19.96 chs.
	Thence, N. $55^{\circ}45'$ E., on a random line, on the SE side line of the "Verno" claim.
22.14	Intersect Cor. No. 2. True course & dist. of the SE side line of claim are therefore N. $55^{\circ}45'$ E., 22.14 chs.
	<u>Mineral Survey No. 1422</u> in sec. 4, T.9N. R.4W. and sec. 33, T.10N. R.4W.
	From Cor. No. 2 of the "Verno" claim; (M.S. 1424), also Cor. No. 1 of the "Golden Age" (M.S. 1422),
22.59	Thence, N. $54^{\circ}23'$ E., on a random line, on SE side line of "Golden Age" claim.
19.20	Intersect Cor. No. 2. True course & dist. are therefore N. $54^{\circ}23'$ E., 19.20 chs.

Retracement of Patented Mining Claims in  
 Secs. 4, 5 and 6, T. 9 N., R. 4 W., and sec. 33, T. 10 N., R. 4 W.

Chains	
8.95	Thence, N.17°26'W., on the NE end line of claim. Intersect Cor. No. 3. True course & dist. of the NE end line are therefore N.17°26'W., 8.95 chs.
22.60	Thence, S.54°30'W., on a random line, on NW side line of claim. Intersect Cor. No. 4. True course and dist. of the NW side line, are therefore S.54°30'W., 22.60 chs.
	Thence, Mineral Survey No.1424 in sec. 4. and 5.
22.15	From cor. Nos. 3 and 4, of the "Verno" and "Golden Age" claims, S.56°15'W., on a random line, on the NW side line of the "Verno" claim. Intersect Cor. No.4. True course and dist. of the NW side line are therefore S.56°15'W., 22.15 chs.
22.80	Thence, S.47°25'W., on a random line, on the NW side line of the "Thunderbolt" claim. Intersect Cor. No.4. True course and dist. of the NW side line are therefore S.47°25'W., 22.80 chs.
	Mineral Survey No.1423 in sec. 5.
22.80	From Cor. Nos. 3 and 4 of the "Thunderbolt" M.S.1424, and the "New Era" (M.S.1423), Thence, S.41°W., on random line on NW side line of the "New Era" claim. Intersect Cor. No.4. True course & dist. of the NW side line are therefore S.41°W., 22.80 chs.
	Mineral Survey No.1310 in sec. 5.
9.30	From Cor. Nos. 4 and 4 of the "New Era" (M.S.1423), and "Uncle Sam" (M.S.1310), claims, S.26°45'W., on a random line, on part of the NW side line of "Uncle Sam" claim. Intersect Cor. No.5. True course and dist. of NE part of the NW side line are therefore S.26°45'W., 9.30 chs.
10.60	Thence, S.75°W., on a random line, on part of the NW side line. Intersect Cor. No.6. True course and dist. of SW part of the NW side line are therefore S.75°W., 10.60 chs. Thence, S.61°40'W., on a random line, on NW side line of the "Golden Rod" claim.
20.65	Intersect Cor. No.4. True course & dist. of the NW side line are therefore S.61°40'W., 20.65 chs.
	Mineral Survey No.1248 in secs. 5, and 6.
15.80	From Cor. Nos. 4 and 4, of the "Golden Rod" (M.S.1310), and the "Antelope" (M.S.1248), claims. Thence, S.70°00'W., on a random line, on part of N side line of the "Antelope" claim. Intersect Cor. No.5. True course and dist. of E part of N side line are therefore S.70°W., 15.80 chs.
6.73	Thence, N.79°W., on part of the N. side line. Intersect Cor. No.6. True course and dist. of W part of E of the N. side line are therefore N.79°W., 6.73 chs. Thence, N.86°W., on a random line, on N. side line of the "Grey Devell" claim.
18.18	Intersect Cor. No.5. True course & dist. of the N. side line are therefore S.86°E., 18.18 chs.

Retracement of Patented Mining Claims in  
Secs. 6 and 36, T.9N., R.4W., and Sec. 31, T.9N., R.3W.

BOOK 8883

Chains

22.22 Thence, S.88°15'W., on a random line, on the N. side  
line of the "Dun Billy" pat. claim.  
Intersect Cor. No.3. True course and dist. of the N.  
side line are therefore N.88°15'E., 22.22 chs.

8.68 Thence, S.17°26'E., on random line, on W end line of  
claim.  
Intersect Cor. No.2. True course and dist. of the W.  
end line are therefore N.17°26'W., 8.68 chs.

Mineral Survey No. 2000 (Black Warrior.)  
in secs. 31 & 36,  
T.9 N., Rs. 3 & 4 W.

10.10 Beginning at Cor. No. 1; thence, N.39°49'W., on random  
line, on SW end line of claim.  
Intersect Cor. No.2. True course and dist. of the SW  
end line are therefore N.39°49'W., 10.10 chs.

17.98 Thence, N.75°21'E., on a random line, on NW side line  
of claim  
Intersect Cor. No.3. True course and dist. of the NW  
side line are therefore N.75°21'E., 17.98 chs.

10.15 Thence, S.39°49'E., on a random line, on NE end line  
of claim.  
Intersect Cor. No.4. True course and dist. of the  
NE end line are therefore S.39°49'E., 10.15 chs.

18.04 Thence, S.75°21'W., on a random line, on the SE side line  
of claim.  
Intersect Cor. No.1. True course and dist. of the SE  
side line are therefore S.75°21'W., 18.04 chs.

GENERAL DESCRIPTION.

- The greater portion of this township lies on the SW slope of the Weaver Mountains, with the NE portion within the watershed of that range. Its elevation ranges from 2500 ft. in the vicinity of the SW corner to 5000 ft. in the NE portion where the greatest elevation is attained.
- The land comprised in the township is of a mountainous and rolling character and the soil ranges from 3rd. to 4th. rate.
- The drainage with the exception of scant areas along the East and North boundaries is SW into the Hassayampa River.
- The main divide of the Weaver Mountains passes thru the extreme NE portion of the Township.
- Intermittent streams of water were found along the upper part of Fools Wash, which drains most of the eastern part of the Township, while running water was found in the Hassayampa River. Springs were found in secs. 1, 2, 3, 4, 9 and 23.
- Timber found consists of paloverde, mesquite and ironwood, and is growing over the greater part of the lands, while in the extreme Northern and Northeastern parts there is a growth of madrono and scruboak.
- Along the river bottom and Fools Wash, a growth of willows and cottonwood was noted.
- The township as a whole is mineralized, with extensive workings in secs. 36, 4, 5 and 6, the latter section with the mining camp of Octave and scattered camps along Weaver Wash. Gold, silver and copper is chiefly found. The mine at Octave was the only producing camp.
- The mineralized nature and brushy character of the lands adapt same to the mining and stockraising industries. Except for the eastern and northeastern parts, the township is accessible to automotive transportation.

FINAL FIELD TEST  
of  
Buff Transit No. 13,000  
by  
Benjamin J. Kinsey, U.S. Surveyor.

- May 12, 1929, in camp, on meridian described on page 2 hereof, at 9h.00m., a.m., app.t., set off  $34^{\circ}03'N.$ , on the lat. arc,  $18^{\circ}08'S.$ , on the decl. arc and determine a meridian with the solar which is found to agree with the true meridian.
- At 12h.00m., app.noon, with the lat. arc unchanged, observed the sun on the meridian; the resultant reading of the decl. arc is  $18^{\circ}10'S.$ , which agrees with the computed declination of the sun.
- At 3h.00m., p.m., app.t., with lat. arc unchanged set off  $18^{\circ}11\frac{1}{2}'S.$ , on the decl. arc and determine a meridian with the solar which is found to agree with the true meridian.
- As all of the observations taken during the usual hours of solar work, agree within 1' of the true meridian, conclude that the adjustments of the instrument have been maintained during the surveys described in the foregoing notes.

BOOK 3295

4-680  
(August, 1926)

**FIELD ASSISTANTS.**  
to  
Benjamin J. Kinsey, U.S. Surveyor.

NAMES.	CAPACITY.
John Boggs	1st Chainman
McMillan Pollock	2nd Chainman
Cleo Sandy	2nd Chainman
Alvin Phillips	Cornerman
Cecil Emmons	Axman
Robert Roy	Flagman
Ura Jordan	Flagman

## CERTIFICATE OF UNITED STATES SURVEYOR

I, Benjamin J. Kinsey, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer, for Group 155, Arizona bearing date of the 3rd day of October, 1928, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the South Boundary of T.10 N., R.4 W., and the East Boundary and Sub-division Lines of T.9 N., R.4 W., altered all those corner monuments on the East Boundary of T.9 N., R.5 W., and retraced all those parts or portions of the Lines of Patented Mining Claims in T.10 N., R.4 W., T.9 N., R.3 W., and Township 9 North, Range 4 West of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes <sup>and by diagram on page 1 hereof</sup> as having been executed by me, and under my direction; and that all the corners of said survey <sup>and retracement</sup> have been established and perpetuated <sup>or altered</sup> in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer, for Group 155, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey, corner alteration, and retracement.

Place: Phoenix, Arizona.

Date: February 17, 1930.

*Benjamin J. Kinsey*  
U. S. Surveyor.

## APPROVAL

OFFICE OF U. S. SUPERVISOR OF SURVEYS,

Denver, Colo., January 30, 1930

The foregoing field notes of the survey of the South Boundary of T.10 N., R.4 W., and East Boundary and Subdivision Lines, of T.9 N., R.4 W. of the alteration of corner monuments on East Boundary of T.9 N., R.5 W., and of the retracement of the Lines of patented mining claims in T.10 N., R.4 W., T.9 N., R.3 W. and Township 9 North, Range 4 West, of the Gila and Salt River Base and Meridian, in the State of Arizona

executed by Benjamin J. Kinsey, U.S. Surveyor

under his special instructions dated October 3, 1928 for Group 155, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys, <sup>corner alterations, and retracements</sup> they describe, are hereby approved.

*Wm. A. Brown*  
U. S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above described surveys in

has been correctly copied from the original notes on file in this office.

—U. S. Supervisor of Surveys.