

BOOK 3894

# FIELD NOTES

OF THE RETRACEMENT OF

Patented Mining Claims in

T. 7 N., R. 3 W., T. 8 N., R. 2 W.,

T. 8 N., R. 3 W., & T. 9 N., R. 3 W.

and Two unpatented Mining Claims in T. 8 N., R. 3 W.

AND OF THE SURVEY OF

South Boundary

West Boundary

and

Subdivision Lines of

Township 8 North, Range 3 West

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

*Benjamin J. Kinsey, U.S. Surveyor*

In the capacity of U. S. Surveyor, under Special Instructions dated *October 3*,

issued by the District Cadastral Engineer to govern surveys included in Group

*Arizona*, which were approved by the Commissioner of the General Land


*November 16, 1928*, and Assignment Instructions dated *February 15, 1930*.

Survey commenced *March 4*, 1930

Survey completed *May 6*, 1930

# INDEX DIAGRAM.

Township \_\_\_\_\_, Range \_\_\_\_\_

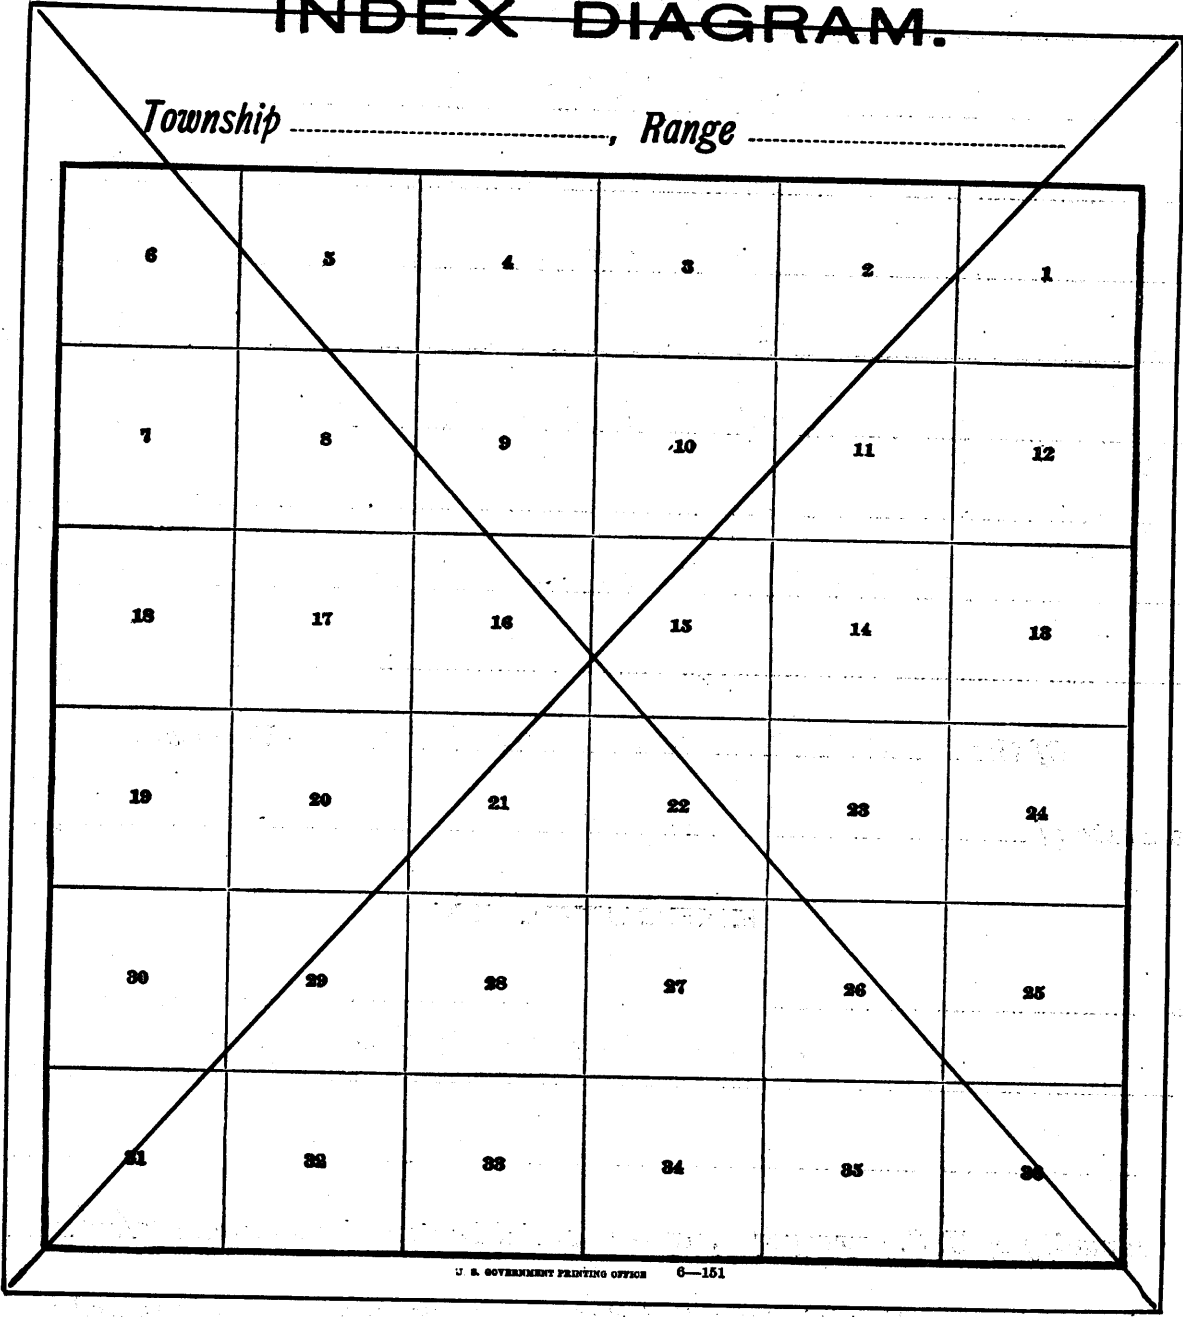



3894

T. 8 N. - R. 3 W.  
INDEX DIAGRAM

BOOK 3894

2nd Standard Parallel North independently Resurveyed thru Rs. 3 & 4 W. - See Book "A"

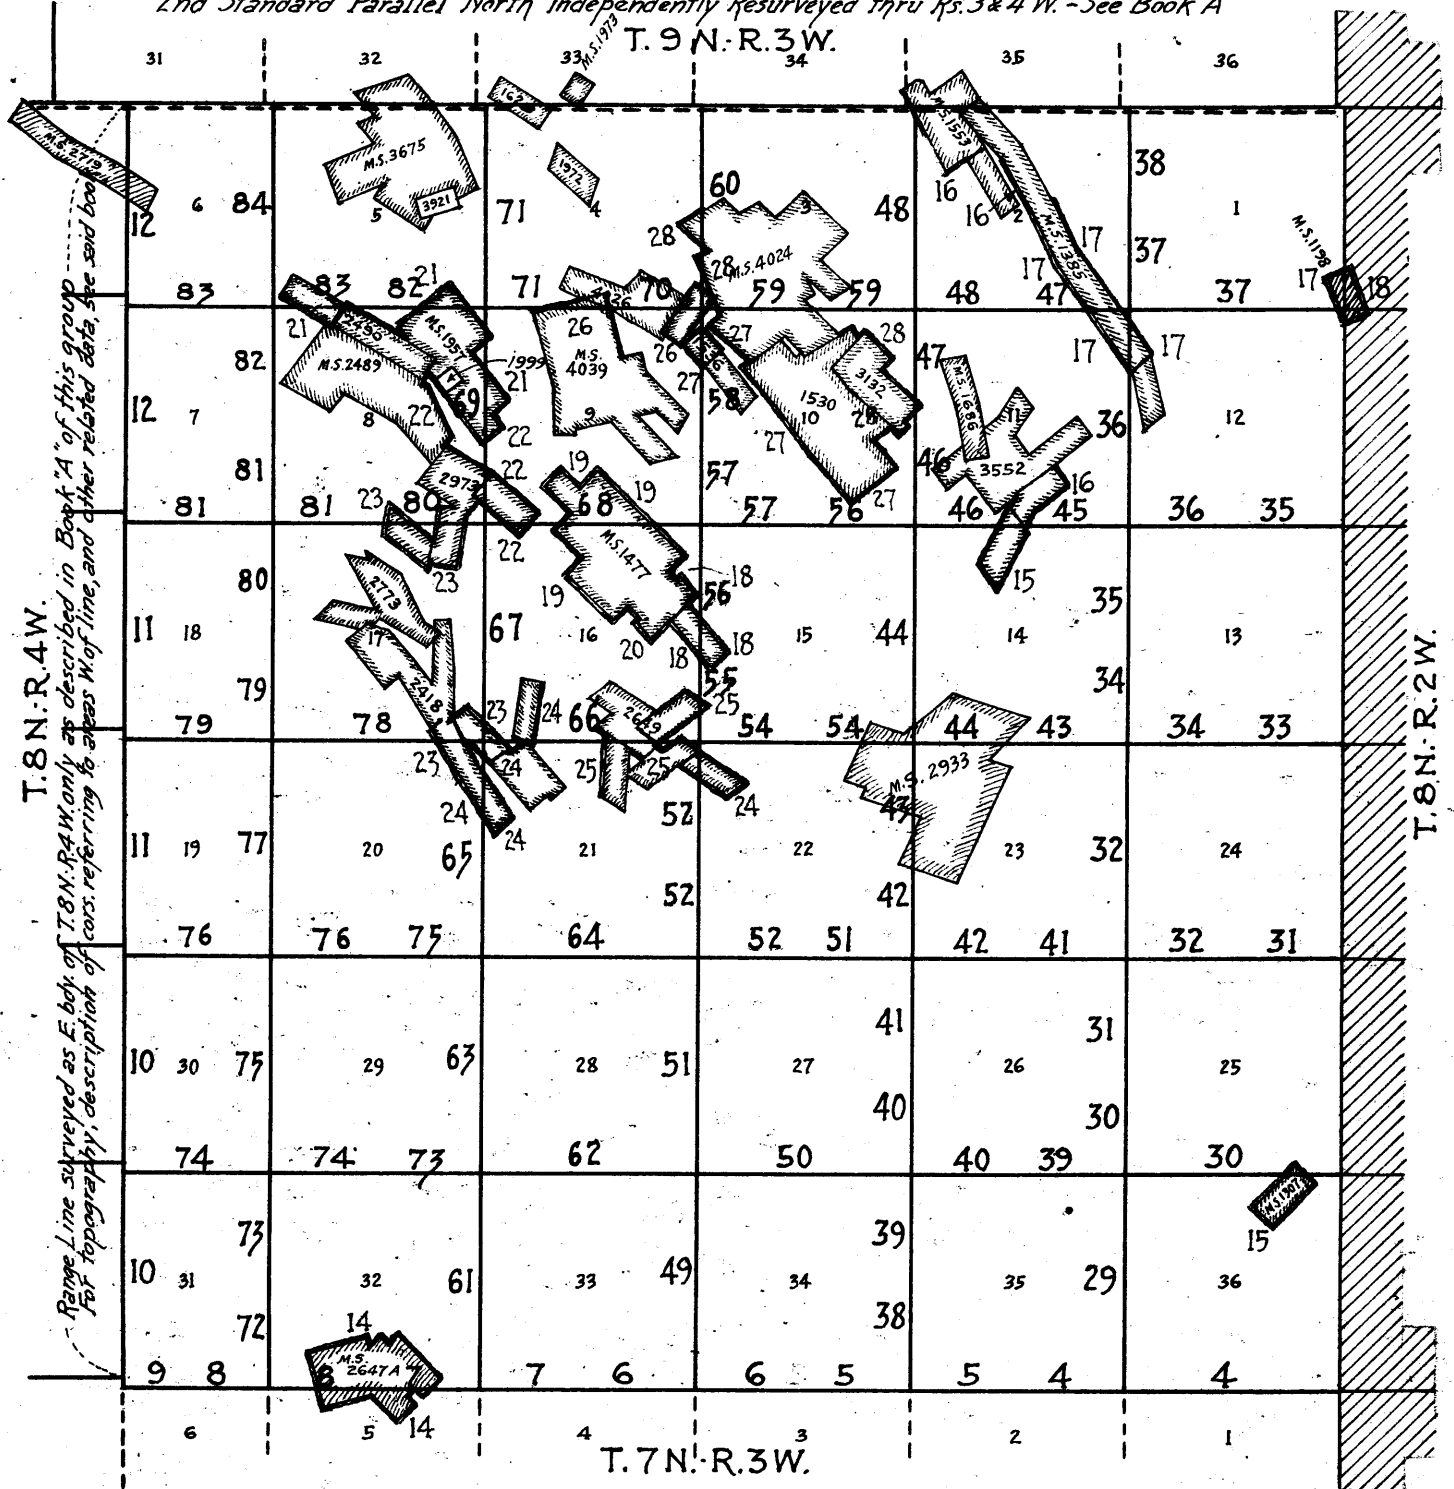


- Lines surveyed under this group. (Notes herein indexed in black figures.)
- Lines resurveyed under this group.
- Lines retraced under this group. (Notes herein indexed in green figures.)
- Lines of previously accepted surveys. Notes on file.
- Unsurveyed township bdrs. and section lines.
-  Areas surveyed as per accepted plats on file.

Book "C" Group 155 Arizona  
Township 8 North, Range 3 West  
DATE DIAGRAM

BOOK 3894

1930

2nd Standard Parallel North

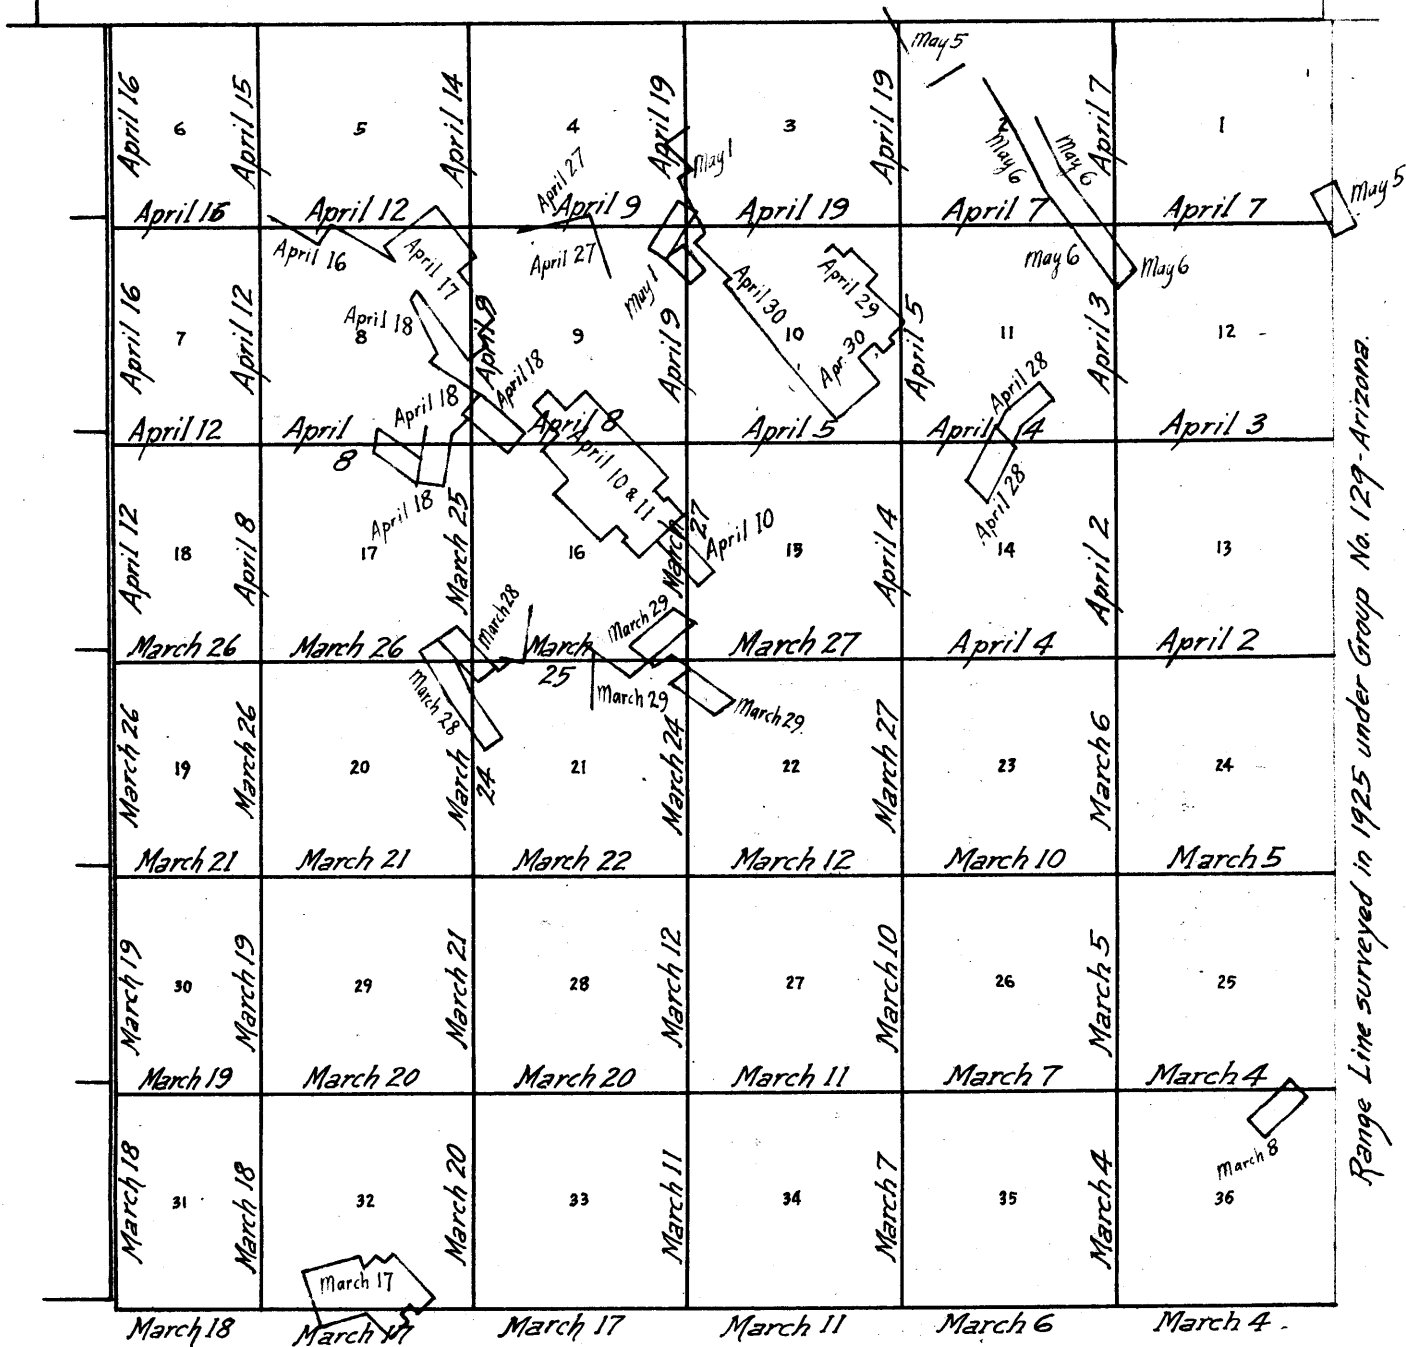

Surveyed by Benjamin J. Kinsey, U.S. Surveyor, under Group 155, Arizona, as described in the notes herein, on dates shown thereon in black. (year 1930).

Retraced by Benjamin J. Kinsey, U.S. Surveyor, under Group 155, Arizona, as described in the notes herein, on dates shown thereon in green. (year 1930.)

Surveyed or Resurveyed by B. J. Kinsey, U.S. Surveyor, under Group 155, Arizona, as described in Books "A" and "B", on dates shown on Date Diagrams of said books.

The surveys herein described were executed by Benjamin J Kinsey, U.S. Surveyor, on dates shown on diagram on page 2 hereof, using Buff Transit No. 18,000 and Young & Sons transit No. 8540. The instruments are equipped with the Smith solar attachment and otherwise conform to the standard requirements of the General Land Office.

On February, 22, 1930, at station in sec. 9, T. 8 N., R. 3 W., G. & S. R. B. & M., Arizona, latitude  $34^{\circ}02'30''$  N. and approximate longitude  $112^{\circ}34'$  W., examine the adjustments of the transits and find no errors; then to test the workings of the solar apparatus, establish a meridian by observation upon Polaris as follows:

At 9h.23.5m, p.m., l.m.t., observe Polaris at western elongation, making four obsns., two each with the telescope in direct and reversed positions and marking the mean point in the line thus determined by a tack set in top of a peg driven firmly in the ground about 5 chs. N. Azimuth of Polaris at western elongation:  $1^{\circ}17'14''$ .

Feb., 23, at same station as above described, lay off the azimuth of Polaris  $1^{\circ}17'14''$  to the east and mark the meridian thus determined by a tack set in the top of a peg driven firmly in the ground about 5 chs. N.

At 9h.00m., a.m., app. t., set off  $34^{\circ}02\frac{1}{2}'$  N., on the lat. arc,  $9^{\circ}54'S.$ , on the decl. arc and determine a meridian with the solar which is found to agree with the true meridian.

At 12h.00m., app., noon, with the lat. arc unchanged, observe the sun on the meridian; the resultant reading of the declination arc is  $9^{\circ}51\frac{1}{2}'S.$ , which agrees with the computed declination of the sun.

At 3h.00m., p.m., with lat. unchanged, set off  $9^{\circ}49\frac{1}{2}'S.$ , on the decl. arc and determine a meridian with the solar which is found to agree with the true meridian.

As all of the obsns. taken during the usual hours of solar work agree within 1' of the true meridian, conclude that the adjustments of the instruments are satisfactory.

Unless otherwise specified all azimuth determinations are accomplished with the solar attachment.

The measurements are determined on the slope, the vertical angle determined and the slope measurements properly reduced to true horizontal equivalents for entry in the field notes.

Unless otherwise specified, all measurements are made with Lufkin and Lallie steel tapes, 5-chains in length, compared with a Lufkin standard steel tape, and found correct.

-----  
OBSERVATION FOR TIME AND LATITUDE.

At station, near the cor. of secs. 25, 30, 31 and 36, Ts. 8 N., Rs. 2 and 3 W., G. & SR B & M., on March 9, 1930, observe the sun for time and latitude:

Mean altitude of suns center:  $51^{\circ}27'45''$   
 Latitude :  $34^{\circ}01'15''$

Mean watch time: 12h.42m., 27s  
 watch fast of l.m.t.: 3lm. 40s.

Survey of the South Boundary of T.8 N., R.3 W.

Chains

✓ The corner of Ts. 7 and 8 N., Rs. 2 and 3 W., established in 1925, under Group 125, is an iron post 3 ins. in diam., firmly set and projecting 12 ins. above ground, with brass cap properly marked and witnessed by a mound of stone 3 ft. base and 2 ft. high W. of cor. No bearing trees.

✓ thence, West, on true line, bet. secs. 36 and 1. Over mountainous land, thru scattering timber & undergrowth.

- 0.85 Desc. 21 ft. over SW slope.
- 3.80 Small ravine, course SW. Asc. 21 ft. over SE slope.
- 7.70 Spur, brs. S. Desc. 25 ft. over SW slope.
- 13.50 Wash, 10 lks. wide, course SE. Asc. 137 ft. over E. slope.
- 15.50 Spur, brs. S. Desc. 85 ft. over W. slope.
- 20.30 Wash, near head, course S. Asc. 12 ft. over E. slope.
- 24.15 Spur, brs. S. Desc. 13 ft. over W. slope.
- 27.06 Wash, 20 lks. wide, course SE. Asc. 59 ft. over E. slope.
- 32.20 Spur, brs. S. Desc. 18 ft. over W. slope.
- 39.00 Wash, 20 lks. wide, course SE. Asc. 160 ft. over NE slope.
- 39.90 Spur, brs. SE. Desc. gradual SW slope.
- 40.00 head of small wash, course S. Asc. gradual SE slope to Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the 1/4 sec. cor. of secs. 36 and 1, with brass cap marked

1/4 S36

S1

1930 from which,

a paloverde, 4 ins. in diam., brs. N. 53 1/2° E., 49 lks. dist., marked BT

a paloverde, 4 ins. in diam., brs. S. 55 1/4° W., 210 lks. dist., marked BT

Red Picacho peak, in T7N R2W brs. S. 44° 17' E., + 5° 50' V.A.  
White Picacho " " " " " S. 60° E., + 3° 30' V.A.

- ✓ Asc. 41 ft. over SE slope.
- 43.00 Spur, brs. S. Desc. 83 ft. over W. slope.
- 46.17 Wash, 20 lks. wide, course S. Asc. 31 ft. over E. slope.
- 50.56 Spur, brs. S. Desc. 40 ft. over SW slope.
- 56.10 Wash, 10 lks. wide, course SE. Asc. 59 ft. over E. slope.
- 58.55 Spur, brs. S. Desc. 24 ft. over SW slope.
- 63.20 Wash, at head, course S. Asc. 45 ft. over E. slope.
- 69.15 Ridge, brs. SW. Peak, about 1 ch. S. about 20 ft. above line point. Desc. 266 ft. over NW slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for the cor. of secs. 1, 2, 35 and 36, with brass cap marked

T8N R3W

S35 S36

S2 S1

T7N

1930

No bearing trees available; raise a mound of stone 3 ft. base, 1 1/2 ft. high W. of cor. 3 ft. dist.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, paloverde and mesquite.

Undergrowth, cacti, palo christo and catelaw.


West, on true line, bet. secs. 2 and 35.

Over mountainous land, thru scattering timber & undergrowth.

Desc. 120 ft. along top of spur.


Survey of the South Boundary of T.8 N., R.3 W.

Chains  
 8.80 Wash, 20 lks. wide, course NW. Asc. 40 ft. over NE slope.  
 12.30 End of spur, slopes N. Desc. 32 ft. over NW slope.  
 14.26 NE fork of San Domingo Wash, 50 lks. wide, course SW.  
 Asc. 70 ft. over SE slope.  
 26.35 Spur, brs. S. Desc. 82 ft. over W. slope.  
 29.06 Wash, near head, course S. Asc. 50 ft. over E. slope.  
 34.70 Spur, at branches to S. and SW. Desc. 37 ft. over NW  
 slope to  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in  
 the ground to bedrock, deposit a stone marked with  
 a cross (X) at base of post, raise a mound of stone  
 about post, for the  $\frac{1}{4}$  sec. cor. of secs. 2 and 35  
 with brass cap marked



1930

No bearing trees available.  
 Desc. 14 ft. over W. slope.  
 41.45 Wash, 10 lks. wide, course S. Asc. 54 ft. over E. slope.  
 44.50 Spur, brs. S. Desc. 158 ft. over SW slope.  
 55.90 Wash, 50 lks. wide, course SW. Asc. 11 ft. over SE slope.  
 57.00 Desc. 26 ft. over SW slope.  
 58.40 Wash (N. fork of San Domingo Wash) 1 ch. wide, course S.  
 Asc. 79 ft. over SE slope.  
 68.66 Spur, brs. SE. Asc. gradually along S. slope of same  
 spur.  
 78.00 Spur, brs. SE. Desc. 10 ft. over SW slope.  
 79.25 Wash, near head, course SE. Asc. gradual E. slope to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 26 ins.  
 in the ground for the cor. of secs. 2, 3, 34 and 35,  
 with brass cap marked



1930

No bearing trees available; raise a mound of stone  
 3 ft. base, 2 ft. high W. of cor.  
 Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti and catclaw.

West, on true line, bet. secs. 3 and 34.  
 Over mountainous land, thru scattering timber & under-  
 growth.

Asc. 23 ft. over SE slope.  
 4.20 Spur, brs. S. Desc. gradual SW slope.  
 5.40 Wash, near head, course S. Asc. 24 ft. over E. slope.  
 10.45 Spur, brs. S. Desc. 37 ft. over W. slope.  
 12.90 Wash, near head, course S. Asc. 37 ft. over E. slope.  
 15.45 Spur, brs. S. Desc. gradual W. slope.  
 17.45 Wash, at head, course SW. Asc. gradual SE slope.  
 21.15 Spur, brs. SW. Desc. 80 ft. over SW slope.  
 24.45 Wash, 10 lks. wide, course SW. Asc. 46 ft. over SE slope.  
 26.10 Spur, brs. SW. Desc. 65 ft. over W. slope.  
 32.45 NW fork of San Domingo Wash, 150 lks. wide, course S.  
 A road is in middle of this wash, brs. N-S.  
 Asc. 54 ft. over E. slope up small ravine.  
 38.70 Leave ravine; turns to NW. about 2 chs. Asc. 68 ft.  
 over E. slope.  
 40.00 On spur, bearing SE set an iron post 3 ft. long, 1 in

## Survey of the South Boundary of T. 8 N., R. 3 W.

Chains

in diam., 18 ins. in the ground to bedrock, deposit a burro shoe, at base of post, raise a mound of stone about post for the  $\frac{1}{4}$  sec. cor. of secs. 3 and 34, with brass cap marked

1	S 34
4	S 3

1930

No bearing trees available.

Asc. 64 ft. over SE slope.  
 43.90 Spur, brs. SE. Desc. 53 ft. over SW slope.  
 46.88 Wash, 10 lks. wide, course SE. (about 3 chs. to head).  
 Asc. 29 ft. over NE slope.  
 48.86 Spur, brs. SE. Desc. 27 ft. over W. slope.  
 50.30 Wash, 10 lks. wide, course SE. (about 4 chs. to head.)  
 Asc. 34 ft. over E. slope.  
 54.83 Spur, brs. SW. Desc. 48 ft. over SW slope.  
 60.75 Wash, 10 lks. wide, course SE. (about 5 chs. to head.)  
 Asc. 48 ft. over E. slope.  
 63.30 Spur, brs. S. Desc. 56 ft. over W. slope.  
 66.65 Wash, 10 lks. wide, course S. Asc. 40 ft. over E. slope.  
 71.40 Spur, brs. S. Desc. 34 ft. over W. slope.  
 73.20 Wash, 10 lks. wide, course SW.  
 Asc. 34 ft. over S. slope.  
 76.25 Spur, brs. SW. Desc. 36 ft. over NW slope to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post, for the cor. of secs. 3, 4, 33 and 34, with brass cap marked

T8N	R3W
S33	S34
S4	S3

T7N  
1930

No bearing trees available; from cor.,  
 Highest peak in Harquahala Mts., brs. S.  $39^{\circ}10'W.$ , -30' VA  
 A sharp peak in the White Tank Mts., brs. S.  $6^{\circ}W.$ , -15' VA

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and greasewood.

West, on true line, bet. secs. 4 and 33.  
 Over mountainous land, thru scattering timber & undergrowth.

Desc. 29 ft. over NW slope.  
 1.65 Junction of washes from N. and NE, thence S. Asc. 29 ft. over E. slope.  
 6.10 Spur, brs. S. Desc. 36 ft. over NW slope.  
 9.46 Center of wash, 70 lks. wide, course S. Asc. 104 ft. over east slope.  
 22.40 Spur, brs. S. A house brs. N.  $65^{\circ}E.$ , in main wash. Desc. 24 ft. over SW slope.  
 28.70 Wash, 10 lks. wide, course S. (about 3 chs. to head.) Asc. 46 ft. over E. slope.  
 30.30 Spur, brs. S. Desc. 62 ft. over SE slope.  
 37.25 Wash, 20 lks. wide, course SE. Asc. 21 ft. over E. slope.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post, for the  $\frac{1}{4}$  sec. cor. of secs. 4 and 33, with brass cap marked



Survey of the South Boundary of T. 8 N., R. 3 W.

Chains

$\frac{1}{4}$  S 33  
S 4  
1930

No bearing trees available.  
 Asc. 46 ft. over E. slope.  
 47.40 Spur, brs. SE. Asc. 69 ft. over NE. slope.  
 52.40 Ridge, brs. S. Desc. 51 ft. over W. slope.  
 55.35 Head of wash, course SW. Asc. 60 ft. over E. slope.  
 58.75 Spur, brs. S. Desc. 125 ft. over NW. slope.  
 64.00 Wash, 10 lks. wide, course SW.  
 Continue descent of 37 ft. over W. slope.  
 65.60 Wash, 10 lks. wide, course S. Asc. 199 ft. over E. slope.  
 72.83 Ridge, brs. S. Desc. 145 ft. over W. slope.  
 78.40 Wash, 10 lks. wide, course S. Asc. 17 ft. over E. slope.  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 15 ins. in  
 the ground to bedrock, deposit a stone marked with a  
 cross (X) at base of post, raise a mound of stone  
 about post for the cor. of secs. 4, 5, 32 and 33, with  
 brass cap marked

T 8 N R 3 W  
 S 32 | S 33  
 S 5 | S 4  
 T 7 N  
 1930

No bearing trees available.  
 From Cor.: Highest peak in the White Tank Mts., brs.  
 S. 0° 50' E., -0° 05' V. A.  
 Saddle Back Mtn., brs. S. 17° 33' W., -0° 30'  
 V. A.  
 Land, mountainous.  
 Soil, rocky 4th rate.  
 Timber, palo verde and mesquite.  
 Undergrowth, cacti, catclaw and greasewood.

West, on true line, bet. secs. 5 and 32.  
 Over mountainous land, thru scattering timber & under-  
 growth.  
 Asc. 45 ft. over E. slope.  
 2.40 Spur, brs. S. Desc. 61 ft. over W. slope.  
 5.25 Wash, 10 lks. wide, near head, course S. Asc. 40 ft.  
 over E. slope.  
 12.15 Small ravine; course SW. Asc. 44 ft. over SE. slope.  
 14.20 Point of spur; brs. S. Desc. 9 ft. over SW. slope.  
 15.75 Wash, 10 lks. wide; course SE. Asc. 133 ft. over SE.  
 slope.  
 19.32 Intersect the SE. end line (3-4) of the "Washington" pat.  
 lode claim, Min. Sur. 2647A at 94 lks. S. 45° W., of  
 the S. E. C. cor. thereof. Across patented mineral land.  
 23.00 Spur, brs. S. Desc. 57 ft. over SW. slope.  
 24.30 Intersect SW. side line (4-1) of "Washington" pat. lode  
 claim., Min. Sur. No. 2647A at 3.52 chs. N. 45° W.,  
 from cor. No. 4, thereof. Leave patented mineral land.  
 25.46 Intersect SE. end line (1-2) of "Denver" pat. lode claim,  
 Min. Sur. No. 2647A at 13 lks. N. 45° E., from the  
 south end center cor. thereof. Thence across pat.  
 mineral land, Min. Sur. No. 2647A.  
 27.85 Wash, 10 lks. wide, course S. Asc. 60 ft. over E. slope.  
 30.27 Spur, brs. S. Desc. 46 ft. over SW. slope.  
 35.15 Ridge, brs. NE-SW. Asc. 23 ft. along NE. slope.  
 38.20 Spur, brs. NW. Desc. 37 ft. over SW. slope to  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 12 ins. in  
 the ground to bed rock, deposit a stone marked with a  
 cross (X) at base of post, raise a mound of stone  
 about post, for  $\frac{1}{4}$  sec. cor. of secs. 5 and 32, with  
 brass cap marked

## Survey of the South Boundary of T. 8 N., R. 3 W.

Chains  $\frac{1}{4}$  S 32  
S 5  
1930

No bearing trees available.

50.15 Wash, 10 lks. wide, course W., from SE.  
Thence descend gradually along N. edge of same.

61.92 Intersect the W. end line (3-4) of the "Hazel" pat. lode  
mining claim, of Min. Sur. No. 2647A at 1.32 chs. S.  
15° 00' E. from cor. No. 3 thereof. Leave pat. miner-  
al land.

62.18 Old road, brs. NE-SW.

64.40 Wash, same, 20 lks. wide, course NW.  
Asc. 8 ft. over NE. slope.

65.30 Spur, brs. NW. Desc. 202 ft. over NW. slope.

74.80 Enter wash, course SW. over rocky bottom.

76.80 Leave wash, asc. 40 ft. over SE. slope.

77.50 Spur, brs. SW., thence over level land to

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in  
the ground for the cor. of secs. 5, 6, 31 and 32,  
with brass cap marked

T 8 N R 3 W  
S 31 | S 32  
S 6 | S 5  
T 7 N  
1930

No bearing trees available.  
Raise a mound of stone 4 ft. base, 2 ft. high W. of  
cor. 3 ft. distant.  
From cor., the W. end of a house brs. N. 52½° E., plus  
2° 40' V. A.  
U.S.L.M. No. 2647A brs. S. 54° 17' E., plus 5½° V.A.  
Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, palo verde and mesquite.  
Undergrowth, cacti, catclaw and greasewood.

-----  
West, on true line, bet. secs. 6 and 31.  
Over mountainous land, thru scattering timber & under-  
growth.

Asc. 14 ft. over gradual SE. slope.

5.00 Wash, 5 lks. wide, course SE.

8.00 Low spur, brs. SE. Desc. 12 ft. over W. slope.

10.00 Wash, 10 lks. wide, course SE. Asc. 60 ft. over SE. slope.

19.40 Spur, brs. S. Desc. 23 ft. over W. slope.

20.86 Wash, at head, course S. Asc. 57 ft. over E. slope.

24.30 Spur, brs. S. Desc. 93 ft. over W. slope.

29.60 Wash, 20 lks. wide, course SE. (About 5 chs. to head)  
Asc. 29 ft. over E. slope.

37.70 Spur, brs. S. Desc. 39 ft. over W. slope.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 14 ins. in  
the ground to bedrock, deposit a stone marked with a  
cross (X) at base of post, raise a mound of stone  
about post, for the ¼ sec. cor. of secs. 6 and 31,  
with brass cap marked

$\frac{1}{4}$  S 31  
S 6  
1930

No bearing trees available. Desc. 147 ft. over W. slope.


43.85 Road, brs. N-S.

47.35 Wash, 20 lks. wide, course SW. Asc. 34 ft. over SE. slope

Survey of the south Boundary of T. 8 N., R. 3 W.

Chains

49.50 Spur, brs. SW. Desc. 7 ft. over NW slope.  
 50.90 Small ravine, course SW. Asc. gradual SE slope.  
 53.00 Spur, brs. S. Desc. gradual W. slope.  
 54.35 Small wash, course SW. Asc. gradual E. slope.  
 55.64 intersect the projection of E. Bdy. of T. 8 N., R. 4 W.,  
 at 4.20 chs. South of the cor. of Ts. 7 & 8 N., R. 4 W.,  
 described in book "A" of this Group.  
 At point of intersection set an iron post 3 ft. long,  
 3 ins. in diam., 26 ins. in the ground for the closing  
 corner of Ts. 7 and 8 N., R. 3 W., with brass cap marked



1930 from which,  
 a paloverde, 6 ins. in diam., brs. N. 24 1/2° E., 254 lks.  
 dist., marked T8N R3W S31 CCBT  
 a paloverde, 6 ins. in diam., brs. S. 59° E., 131 lks.  
 dist., marked T7N R3W S6 CCBT

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and greasewood.

Survey of the West Bdy. of T. 8 N., R. 3 W.

Chains

The following notes describe the establishment, on the East Bdy. of T. 8 N., R. 4 W., of the section and quarter section corners referring to T. 8 N., R. 3 W., only, omitting topography and description of previously established corners by reason of such data being fully described in book "A" of this group.

From the closing cor. of Ts. 7 and 8 N., R. 3 W., hereinbefore described.

North, on true line, on W. bdy. of Sec. 31.

4.20 (Intersect the cor. of Ts. 7 and 8 N., R. 4 W., described in book "A" of this group.)

40.00 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post for the  $\frac{1}{4}$  sec. cor. of sec. 31 only, with brass cap marked

$\frac{1}{4}$  S31

1930

No bearing trees available.

44.20 (Intersect the  $\frac{1}{4}$  sec. cor. sec. 36, T. 8 N., R. 4 W.)

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, deposit a stone, marked with a cross (X) at base of post, raise a mound of stone about post for the cor. of secs. 30 and 31 only, with brass cap marked

T8N	T8N
R4W	S30
S36	S31
	R3W

1930

No bearing trees available.

North, on true line, on W. bdy. of sec. 30.

4.20 (Intersect the cor. of secs. 25 and 36, T. 8 N., R. 4 W.)

40.00 Set an iron post 3 ft. long, 1 in in diam., 18 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post for the  $\frac{1}{4}$  sec. cor. of sec. 30, only, with brass cap marked

$\frac{1}{4}$  S30

1930

No bearing trees available.

44.20 (Intersect the  $\frac{1}{4}$  sec. cor. of sec. 25, T. 8 N., R. 4 W.)

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the cor. of secs. 19 and 30 only, with brass cap marked

T8N	T8N
R4W	S19
S25	S30

1930

Survey of the W. Bdy. of T. 8 N., R. 3 W.

Chains

No bearing trees available.

North, on true line, on W. Bdy. of sec. 19.

4.20 (Intersect the cor. of secs. 24 and 25, T. 8 N., R. 4 W.)

40.00 Set an iron post 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of sec. 19 only, with brass cap marked

1/4 S 19

1930

No bearing trees available.

44.20 (Intersect the 1/4 sec. cor. of sec. 24, T. 8 N., R. 4 W.)

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post, for the cor. of secs. 18 and 19 only, with brass cap marked

T8N	T8N
R4W	S18
S24	S19
	R3W

1930

No bearing trees available.

North, on true line, on W. bdy. of sec. 18.

4.20 (Intersect the cor. of secs. 13 and 24, T. 8 N., R. 4 W.)

40.00 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of sec. 18, with brass cap marked

1/4 S 18

1930

No bearing trees available.

44.20 (Intersect the 1/4 sec. cor. of sec. 13, T. 8 N., R. 4 W.)

80.00 Set an iron post 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post, for the cor. of secs. 7 and 18, with brass cap marked

T8N	T8N
R4W	S7
S13	S18
	R3W

1930

No bearing trees available.

Survey of the W. Bdy. of T. 8 N., R. 3 W.

Chains

4.20 North, on true line, on the W. Bdy. of sec. 7.  
 (Intersect the cor. of secs. 12 and 13, T. 8 N., R. 4 W.)  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in  
 the ground to bedrock, deposit a stone marked with a  
 cross (X) at base of post, raise a mound of stone about  
 post, for the 1/4 sec. cor. of sec. 7, only, with brass  
 cap marked

1/4 S7

1930

No bearing trees available.

44.20 (Intersect the 1/4 sec. cor. of sec. 12, T. 8 N., R. 4 W.)  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 14 ins.  
 in the ground to bedrock, deposit a stone marked with  
 a cross (X) at base of post, raise a mound of stone  
 about post, for the cor. of secs. 6 and 7 only, with  
 brass cap marked

T8N	T8N
R4W	S6
S12	S7
	R3W

1930

No bearing trees available.

4.20 North, on true line, on the W. Bdy. of sec. 6.  
 (Intersect the cor. of secs. 1 and 12, T. 8 N., R. 4 W.)  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 16 ins. in  
 the ground to bedrock, deposit a stone marked with a  
 cross (X) at base of post, raise a mound of stone  
 about post, for the 1/4 sec. cor. of sec. 6 only, with  
 brass cap marked

1/4 S6

1930

No bearing trees available.

40.12 Intersect the SW side line (3-4) of the "New York" pat.  
 lode mining claim, Min. Sur. No. 2719, at 8.74 chs.  
 N. 57° 50' W., of cor. No. 3 thereof.  
 Across patented mineral land.  
 50.77 Intersect the NE side line, (1-2) of the "New York" pat.  
 lode mining claim, Min. Sur. No. 2719, at 5.06 chs.  
 S. 57° 50' E. of cor. No. 1 thereof. Leave pat. mineral  
 land.

44.20 (Intersect the 1/4 sec. cor. of sec. 1, T. 8 N., R. 4 W.)

75.03 Intersect closing cor. of T. 8 N., R. 3 & 4 W., on 2nd Std. Par. N.,  
described in book "A" of this group.

Boundaries of Township 8 North, Range 3 West.

BOOK 3894

Latitudes, departures and closing errors.

Line designated	Course	Distance	Latitudes		Departures	
			N.	S.	E.	W.
South Bdy.	West	455.64				455.64
West Bdy.	North	475.03	475.03			
North Bdy. (2nd. Std. Par. N.)	East	455.61			455.61	
East Bdy.	South	475.08		475.08		
Convergency.					.48	
Totals			475.03	478.08	456.09	455.64
			475.03	475.03	455.64	
			Error in latitude 0.05			
			Error in departure.		0.45	

Retracement of patented mining claims in T<sub>s</sub>. 7 & 8 N., R. 3 W.

chains Unless otherwise specified, all mining claim corners found in the following described retracements, were in substantial agreement with their recorded descriptions.

Mineral Survey No. 2647A.  
in secs. 5 and 32,  
T<sub>s</sub>. 7 & 8 N., R. 3 W.

- Beginning at Cor. No. 3 of the "Luck Sure" pat. lode mining claim, Min. Sur. No. 2647A.  
S. 15° E., on true line, on W. end line of patented group 2647A, tords flags visible on each cor. found thereof.
- 6.26 Intersect Cor. No. 3 of the "Sulphurets" claim.  
8.99 Intersect Cor. No. 4 of the "Luck Sure" claim.  
10.80 Intersect the W.E.C. Cor. of the "Sulphurets" claim.  
11.71 Intersect Cor. No. 3 of the "Hazel" claim.  
15.34 Intersect Cor. No. 4 of the "Sulphurets" claim.  
16.24 Intersect the W.E.C. Cor. of the "Hazel" claim.  
20.76 Intersect Cor. No. 4 of the "Hazel" claim.
- The true course and dist. for the W. end line of this group of claims are therefore S. 15° 00' E., 20.76 chs.
- Thence,  
N. 75° 00' E., on true line, on S. side line of the "Hazel" pat. lode claim, tords flag visible on Cor. No. 1 thereof.
- 18.49 Intersect the SW side line of the "Carthage" pat. lode claim, at 14.07 chs. N. 45° W., of cor. No. 4 thereof.  
From Cor. No. 4 of the "Carthage" claim, N. 45° E., on SE end line of the "Carthage", on true line.
- 4.50 Intersect the S.E.C. cor. of the "Carthage".  
9.00 Intersect Cor. No. 3 of the "Carthage".  
Thence, N. 45° W., on true line, on NE side line of the "Carthage", tords flag visible on cor. 2 thereof.
- 4.23 Intersect the SE end line of the "Denver" pat. lode claim at 52 lks. N. 45° E., of Cor. No. 1 thereof.  
Thence, N. 45° E., on true line, on SE end line of the "Denver" tords flag visible on Cor. No. 2 thereof.
- 4.54 Intersect the S.E.C. Cor. of the "Denver".  
5.49 Intersect the SW side line of the "Washington" pat. claim (1-4) at 4.34 chs. N. 45° W. of Cor. No. 4 thereof.  
From Cor. No. 4 of the "Washington" claim, N. 45° E., on true line, on SE end line of the claim, tords flag visible on Cor. No. 3 thereof.
- 4.46 Intersect the S.E.C. Cor. of the "Washington" pat. claim.  
8.93 Intersect Cor. No. 3 of the claim.  
Thence,  
N. 45° W., on true line, on the NE side line of claim, tords flag visible on Cor. No. 2 thereof.
- 22.23 Intersect Cor. No. 2 of the "Washington" claim.  
Thence, S. 45° W., on true line, on NW end line of the "Washington" claim, tords flag visible on Cor. No. 1 thereof.
- 4.49 Intersect the N.W.E.C. Cor. of the "Washington" claim.  
5.74 Intersect the NE side line of the "Denver" claim, at 4.22 chs. S. 45° E., of Cor. No. 3 thereof.  
From Cor. No. 3 of the "Denver" claim, S. 45° W., on true line, on the NW end line of claim, tords flag visible on Cor. No. 4 thereof.
- 5.85 Intersect the E. end line of the "Luck Sure" pat. claim at 4.40 chs. S. 15° E. of Cor. No. 2 thereof.  
Thence, from Cor. No. 2 of the "Luck Sure", claim, S. 75° W., on true line, on the N. side line of claim, tords flag visible on Cor. No. 3 thereof.
- 22.44 Intersect Cor. No. 3 of the "Luck Sure" claim.



Retracement of patented and unpatented mining claims in T. 8 N., R. 3 W. BOOK 3894

Chains

Mineral Monument No. 2647

U.S.L.M. No. 2647 is a Schist boulder, 20 ins. wide, 14 ins. thick, firmly set and projecting 20 ins. above ground, marked with USLM. 2647 and above these letters is a cross 3 ins. long. From monument, the 1/4 sec. cor. of secs. 5 and 32, T. 8 N., R. 3 W., brs. N. 24° 45' W., 296 lks. dist.

Patented Min. Sur. No. 1307 (Trilby claim) in secs. 25 and 36.

From Cor. No. 1, N. 49° 55' E., on true line, on NW side line of the Trilby pat. lode mining claim, tords flag visible on Cor. No. 2 thereof. 22.28 Intersect Cor. No. 2. True course and dist. of the NW side line of the Trilby are therefore N. 49° 55' E., 22.28 chs. Thence, S. 39° 47' E., on true line, on NE end line of the Trilby, tords flag visible on Cor. No. 3 thereof. 8.91 Intersect Cor. No. 3. True course and dist. of the NE end line of the Trilby are therefore S. 39° 47' E., 8.91 chs. Thence, S. 49° 41' W., on true line, on SE side line of the Trilby, tords flag visible on Cor. No. 4 thereof. 22.12 Intersect Cor. No. 4 of the Trilby. True course and dist. of the SE side line are therefore S. 49° 41' W., 22.12 chs. Thence, N. 40° 37' W., on true line, on SW end line of the Trilby, tords flag visible on Cor. No. 1 thereof. 9.00 Intersect Cor. No. 1. True course and dist. of SW end line are therefore N. 40° 37' W., 9.00 chs. From Cor. No. 1, U.S.L.M. No. 1307 brs. N. 31° 10' E., 11.79 chs. The monument is a granite stone, 10 x 12 x 16 ins. above ground, firmly set, mkd. USLM. 1307 on SW face, witnessed by large boulder NE, and alongside Cor. stone.

Secs. 11 and 14. Unpatented Min. Sur. No. 3552. (Hughes claim).

Beginning at Cor. No. 1, S. 27° 02' 10" W., on true line, on NW side line, tords flag visible at Cor. No. 2. 22.74 Intersect Cor. No. 2; thence, S. 38° 33' E., on true line, True course and dist. of the NW side line are therefore S. 27° 02' 10" W., 22.74 chs. Thence, S. 38° 33' E., on true line, on SW end line, tords flag visible at Cor. No. 3. 10.20 Intersect Cor. No. 3. True course and dist. of SW end line are therefore S. 38° 33' E., 10.20 chs. Thence, N. 27° 03' E., on true line, on SE side line, tords flag visible at Cor. No. 4 thereof. 22.83 Intersect Cor. No. 4. True course and dist. of SE side line are therefore S. 38° 33' E., 22.83 chs. Thence, N. 38° 33' W., on true line, on NE end line, tords flag visible on Cor. No. 1. 9.77 Intersect Cor. No. 1.

Unpatented (Woodrow Wilson claim).

Beginning at Cor. No. 1; thence, S. 52° 00' 20" W., on true line, on NE part of NW side line of claim, tords flag visible at Cor. No. 2.

Retraacement of unpatented and patented mining claims in T.8 N., R.3 W.

Chains	
16.80	Intersect Cor. No. 2; True course and dist. of NE part of NW side line of claim are therefore S.52°00'20"W., 16.80 chs. Thence, S.26°08'40"W., on true line, towards flag visible on Cor. No. 3, on part of the NW side line.
3.35	Intersect Cor. No. 3. True course and dist. of this part of the NW side line are therefore S.26°08'40"W., 3.35 chs. Thence, S.38°33'E., on true line, on SW end line, towards flag visible on Cor. No. 4.
9.09	Intersect Cor. No. 4. True course and dist. of the SW end line are therefore S.38°33'E., 9.09 chs. Thence, N.26°08'40"E., on true line, on SE side line (part) towards flag visible on Cor. No. 5.
3.18	Intersect Cor. No. 5. True course and dist. of this part of SE side line are therefore N.26°08'40"E., 3.18 chs. Thence, N.52°00'20"E., on true line, towards flag visible on Cor. No. 6 (part of the SE side line.)
16.80	Intersect Cor. No. 6. True course and dist. of this part of the SE side line are therefore N.52°00'20"E., 16.80 chs. Thence, N.38°33'W., on true line on NE end line of claim, towards flag visible at Cor. No. 1.
9.30	Intersect Cor. No. 1. True course and dist. of the NE end line of claim are therefore N.38°33'W., 9.30 chs.

Patented Min. Sur. No. 1353.  
in  
secs. 34 & 35, T.9 N., R.3 W.  
and  
sec. 2, T.8 N., R.3 W.

14.94	Beginning at Cor. No. 5 of the "Bellairs," thence, S.26°E., on true line, on SW side line of the claim, towards flag visible on Cor. No. 6. Intersect Cor. No. 6. True course and dist. of the SW side line are therefore S.26°E., 14.94 chs. From Cor. No. 5 of the "Flying Dutchman," thence, N.60°E., on true line, on SE end line, towards flag visible on Cor. No. 1.
9.00	Intersect Cor. No. 1. True course and dist. of the SE end line of claim are therefore N.60°E., 9.00 chs. Thence, N.60°E., on true line, on SE side line of the "Homestake No. 2," towards flag visible on Cor. 1.
9.00	Intersect Cor. No. 1. True course and distance of SE side line of the claim are therefore N.60°E., 9.00 chs.

Patented Min. Sur. No. 1385  
in  
secs. 2 and 11,  
T.8 N., R.3 W.

22.76	Beginning at Cor. No. 1 of the "South Amazon," thence, S.28°E., on SW side line of claim, towards flag visible at Cor. No. 2. Intersect Cor. No. 2. True course and dist. of SW side line are therefore S.28°00'E., 22.76 chs.
-------	--

Retracement of Patented Mining Claims in T. 8 N., R. 3 W.

Chains	
22.20	Beginning at Cor. No.1 of the "Congo" pat. lode claim, thence, S.22°53'E., on true line, on SW side line, tords flag visible on Cor. No.2.
	Intersect Cor. No.2. True course and dist. of the SW side line of the claim are therefore S.22°53'E., 22.20 chs.
22.88	From Cor. No.1 of the "Gypsy" pat. lode mining claim, S.36°31'E., on true line, tords flag visible on Cor. No.2, along SW side line.
	Intersect Cor. No.2. True course and dist. of the SW side line are therefore S.36°31'E., 22.88 chs.
22.48	From Cor. No.1 of the "Iron Hill" pat. lode claim, S.36°19'E., on true line, on SW side line, tords flag visible on Cor. No.2.
	Intersect Cor. No.2. True course and dist. of the SW side line are therefore S.36°19'E., 22.48 chs.
9.14	Thence, N.51°30'E., on true line, on SE end line of claim, tords flag visible on Cor. No. 3.
	Intersect Cor. No.3. True course and dist. of the SE end line are therefore N.51°30'E., 9.14 chs.
22.57	Thence, N.36°19'W., on true line, on NE side line of claim, tords flag visible on Cor. No.4.
	Intersect Cor. No.4. True course and dist. of the NE side line are therefore N.36°19'W., 22.57 chs.
22.88	Thence, N.36°31'W., on true line, on NE side line of the "Gypsy" pat. lode mining claim, tords flag visible on Cor. No.4.
	Intersect Cor. No.4 of the claim. True course and dist. of the NE side line are therefore N.36°31'W., 22.88 chs.
22.20	Thence, N.22°53'W., on true line, on NE side line of the "Congo" pat. lode mining claim.
	Intersect Cor. No.4. True course and dist. of the NE side line are therefore N.22°53'W., 22.20 chs.

"Washington" pat. lode claim  
 Min. Sur. No. 1198  
 in  
 sees. 1, 6, 7 and 12,  
 Ts. 8 N., Rs. 2-3 W.

15.34	Beginning at Cor. No.1, thence, N.23°22'W., on true line, on SW side line, tords flag visible on Cor. No.2.
	Intersect Cor. No.2. True course and dist. of the SW side line are therefore N.23°22'W., 15.34 chs.
8.16	Thence, N.66°E., on true line, on NW end line, tords flag visible on Cor. No.3.
	Intersect Cor. No.3. True course and dist. of the NW end line are therefore N.66°E., 8.16 chs. Thence, S.26°42'E., on true line, tords flag visible on Cor. 4, on NE side line.

## Retracement of Patented Mining Claims in T.8 N., R.3 W.

Chains	
15.28	Intersect Cor. No.4. True course and dist. of the NE side line are therefore S.26°42'E., 15.28 chs. Thence, S.66°W., on true line, on SE end line of claim, tords flag visible on Cor. No.1.
9.09	Intersect Cor. No.1. True course and dist. are S.66°W., 9.09 chs. for SE end line.
-----	
Min. Sur. No.1477 in secs. 9, 15 and 16 T.8 N., R.3 W.	
	Beginning at Cor. No.1 of the "Denver No.3," pat. lode claim. Thence, S.41°E., on random line, on NE side line of claim.
22.47	Intersect Cor. No.2. True course and dist. are therefore S.41°E., 22.47 chs. Thence, S.49°W., on random line, on SE end line.
8.43	Intersect Cor. No.3. True course and dist. of the SE end line are therefore S.49°W., 8.43 chs. Thence, N.40°45'W., on random line, on SW side line.
22.51	Intersect Cor. No.4. True course and dist. of the SW side line are therefore N.40°45'W., 22.51 chs. Thence, N.49°50'E., on random line, on NW end line.
8.33	Intersect Cor. No.1. True course and dist. of the NW end line are therefore N.49°50'E., 8.33 chs.
-----	
5.28	From Cor. No. 1 of the "Denver No.3," N.50°E., on random line on SE side line of the "Tip Top" pat. lode claim. Intersect Cor. No. 2. True course and dist. of part of the SE side line are therefore N.50°E., 5.28 chs.
9.09	Thence, N.39½°W., on random line, on NE end line of the "Tip Top" Intersect Cor. No.3. True course and dist. of the NE end line are therefore N.39½°W., 9.09 chs.
2.02	Thence, S.49°W., on random line, on part of the NW side line. Intersect Cor. No.2 of the "Denver No.2" True course and dist. of part of the NW side line are therefore S.49°W., 2.02 chs.
5.14	Thence, N.44°50'W., on random line, on part of the NE side line of the "Denver No.2" Intersect Cor. No.1 of the "Burro" pat. lode mining claim. True course and dist. of this part of the NE side line are therefore N.44°50'W., 5.14 chs.
8.93	Thence, N.42°40'E., on random line on the SE end line. Intersect Cor. No.2 of the "Burro" True course and dist. of the SE end line of the "Burro" are therefore N.42°40'E., 8.93 chs.

Retracements of Patented Mining Claims in T.8 N., R.3 W.

Chains

- 22.75 Thence, N.47°15'W., on true line, on NE side line.  
Intersect Cor. No.3 of the "Burro."
- 22.75 Thence, N.48°30'W., on random line, on NE side line of the "Gold King," pat. lode claim.  
Intersect Cor. No.3. True course & dist. of the NE side line of the claim are therefore N.48°30'W., 22.75 chs. Thence, S.42°W., on random line, on NW end line of the claim.
- 8.60 Intersect Cor. No.4 of the claim.  
True course and dist. of the NW end line are therefore S.42°W., 8.60 chs.  
Thence, N.48°30'W., on random line, on part of the NE side line of the "Mammoth" pat. lode claim.
- 8.42 Intersect Cor. No.3 of the "Mammoth."  
True course and dist. of this part of the NE side line are therefore N.48°30'W., 8.42 chs.
- 9.00 Thence, S.48°15'W., on random line, on NW end line of the "Mammoth."  
Intersect Cor. No.4 of the "Mammoth."  
True course and dist. of the NW end line of claim are therefore S.48°15'W., 9.00 chs.
- 13.53 Thence, S.47°45'E., on random line, on part of the SW side line of the "Mammoth."  
Intersect Cor. No. 2 of the "Denver No.4."  
True course and dist. of this part of the SW side line are therefore S.47°45'E., 13.53 chs.
- 9.04 Thence, S.49°45'W., on random line, on NW end line of the "Denver 4."  
Intersect Cor. No.3 of the "Denver No.4."  
True course and dist. of the NW end line are therefore S.49°45'W., 9.04 chs.
- 13.41 Thence, S.47°45'E., on random line, on part of the SW side line of the "Denver No.4."  
Intersect Cor. No.2 of the "Gold King No.2" pat. lode mining claim.  
True course and dist. of this part of the SW side line are therefore S.47°45'E., 13.41 chs.
- 8.70 Thence, S.49°45'W., on random line, on NW end line of the "Gold King No.2."  
Intersect Cor. No.3 of the "Gold King No.2."  
True course and dist. of the NW end line are therefore S.49°45'W., 8.70 chs.
- 23.00 Thence, S.46°45'E., on random line, on SW side line of claim.  
Intersect Cor. No.4 of the claim.  
True course and dist. of the SW side line are therefore S.46°45'E., 23.00 chs.
- 9.10 Thence, N.49°E., on random line, on SE end line of claim.  
Intersect Cor. No. 1.  
True course and dist. for the SE end line of claim are therefore N.49°E., 9.10 chs. Thence, S.47°30'E., on true line on part of the SW side line of the "Denver No. 1" pat. lode claim, towards flag visible on Cor. No.4 thereof.
- 8.73 Intersect Cor. No.4 of the "Denver No.1."  
True course and dist. of this part of the SW side line are therefore S.47°30'E., 8.73 chs.

## Retracement of Patented Mining Claims in T.8 N., R.3 W.

## Chains

- Thence,  
S.49°W., on random line, on part of the NW side line of  
the "Tip Top" pat. lode claim.
- 2.23 Intersect Cor. No.4 of the "Tip Top".  
True course and dist. of this part of the NW side line  
are therefore S.49°W., 2.23 chs.
- Thence,  
S.41°E., on random line, on SW end line of claim.
- 9.03 Intersect Cor. No.1 of the "Tip Top".  
True course and dist. of the SW end line are therefore  
S.41°E., 9.03 chs.
- Thence,  
N.49°E., on random line, on SE side line of the "Tip Top".
- 8.35 Intersect Cor. No.4 of the "Denver No.3".  
True course and dist. of this part of the SE side line  
are therefore N.49°E., 8.35 chs.

U.S.L.M. No.1477

U.S.L.M. No. 1477 consists of a large, partly scattered mound of stone, in the center of which is a badly rotted wooden post, about 9 ins. in diam., and 2 ft. long, with scribe markings still visible and reading USLM 1477; reconstruct this monument by setting an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, in the exact center of the original mound, verify this position by record bearings, with brass cap marked

USLM 1477

1930

From monument,

A Black rock, brs. N.1°30'E., 1¼ miles.

E. edge of main tunnel of "Tip Top" claim, brs. N.80°35'W.

South edge of Red Picacho peak in T.7 N., R.2 W., brs. S.31°30'E.

Old Gilbert P.O. brs. N.74°10'W.

USBM 4370 brs. S.26°50'W., 111 lks. (-9° V.A.),

which is a brass cap set flush with surface of outcropping ledge and mkd.



The ¼ sec. cor. of secs. 15 and 16, brs. N.79°20'E.,  
200 lks. dist.

Retracements of Patented Mining Claims in T.8 N., R.3 W.

Chains	
	Min. Sur. No.2490 in <u>secs. 5 and 8.</u>
22.70	Beginning at Cor. No.1, thence, S.60°E., on SW side line of the "Home" pat. lode mining claim, on random line. Intersect Cor. No.2. True course and dist. of the SW side line are therefore S.60°E., 22.70 chs.
9.12	From Cor. No. 2 of the "Home" claim, thence, N.30°E., on random line, on SE end line. Intersect Cor. No.3. True course and dist. of the SE end line are therefore N.30°E., 9.12 chs.
22.80	From Cor. No.4 of the "Blue Neley" pat. lode mining claim, thence, S.60°E., on random line, on the NE side line of the claim. Intersect Cor. No. 3. True course and dist. of the NE side line of claim are therefore N.60°W., 22.80 chs.
4.18	From Cor. No.4 of "Gray Eagle" M.S.2490, thence, S.60°E., on true line, on NE side line of the "Gray Eagle", to red flag visible on Cor. No.3 thereof. Intersect SW side line of the "Grand" pat. lode claim, M.S.1957, bearing S. 38°25'E. and N.38°25'W. bet. Cors. Nos.2 and 3. Thence, N.38°25'W., on true line, on part of SW side line of the "Grand".
5.17	Intersect Cor. No.3. True course and dist. of this part of the SW side line are therefore N.38°25'W., 5.17 chs.
9.15	Thence, N.51°35'E., on random line, on NW end line. Intersect Cor. No.4 of the "Grand". True course and dist. of the NW end line of the "Grand" are therefore N.51°35'E., 9.15 chs.
9.16	Thence, N.51°35'E., on random line, on the NW end line of the "St. Paul" pat. lode claim. Intersect Cor. No.3 of the St. Paul. True course and dist. of the NW end line are therefore N.51°35'E., 9.16 chs.
9.13	Thence, N.51°35'E., on random line, on NW end line of the "Yellow Jacket" pat. lode claim. Intersect Cor. No.3 of the "Yellow Jacket". True course and dist. of the NW end line are therefore N.51°35'E., 9.13 chs.
22.70	Thence, S.38°25'E., on random line, on NE side line of the "Yellow Jacket" claim. Intersect Cor. No.4. True course and dist. of the NE side line are therefore S.38°25'E., 22.70 chs.
9.00	Thence, S.51°35'W., on random line, on SE end line of the claim. Intersect Cor. No.1, 3 and 4 of the "Yellow Jacket", "St. Louis" and "St. Paul" claims. True course and dist. of the SE end line are therefore S.51°35'W., 9.00 chs.
22.65	Thence, S.38°25'E., on random line, on NE side line of the "St. Louis" claim. Intersect Cor. No.4. True course and dist. of the NE side line are therefore S.38°25'E., 22.65 chs.
9.10	Thence, S.51°35'W., on random line, on SE end line of the "St. Louis" claim. Intersect Cor. No. 1 of the "St. Louis" claim. True course and dist. of the SE end line of claim are therefore S.51°35'W., 9.10 chs.

MINERAL SURVEY No.1957 IN SECS. 5, 8 and 9

## Retracements of the Patented Mining Claims in T.8 N., R.3 W.

Chains	
6.80	Thence, S.38°25'E., on random line, on NE side line of the "Denis" claim. Intersect Cor. No.1 of claim. True course and dist. of this part of the NE side line are therefore S.38°25'E., 6.80 chs.
9.09	Thence, S.51°35'W., on random line, on SE end line of claim. Intersect Cor. No.2. True course and dist. of the SE end line are therefore S.51°35'W., 9.09 chs.
22.98	Thence, N.38°25'W., on random line, on SW side line of claim. Intersect Cor. No. 3. True course and dist. of the SW side line are therefore N.38°25'W., 22.98 chs.
6.60	Thence, N.38°25'W., on random line, on SW side line of the "Copper King" pat. lode claim, (Min. Sur.No.1999.) Intersect Cor. No.3 of the "Copper King". True course and dist. of the SW side line are therefore S.38°25'E., 6.60 chs.
3.27	Thence, N.38°25'W., on true line, on SW side line of the "Grand" pat. lode claim. (Min. Sur.No.1957.) Intersect the SE end line of the "Gray Eagle" pat. lode claim. (Min. Sur. No.2490)
4.04	Thence, S.30°W., on random line, on SE end line of the "Gray Eagle". Intersect Cor. No.2 of the "Gray Eagle". True course and dist. of the SE end line of the "Gray Eagle" are therefore N.30°E., 4.04 chs.
2.96	Thence, S.60°E., on random line, on NE side line of the "Laura" pat. lode claim. (Min. Sur. No.2489). Intersect Cor. No.3 of the Laura claim. True course and dist. of this part of the NE side line of the "Laura" are therefore N.60°W., 2.96 chs.
21.65	Thence, S.26°13'E., on random line, on NE side line of the "Porina" pat lode claim. Intersect Cor. No.3. True course and dist. of the NE side line of the claim are therefore N.26°13'W., 21.65 chs.
4.42	Thence, S.38°W., on random line, on SE end line of claim. Intersect Cor. No.2 of the "Golden State" pat. lode claim (Min. Sur. No.2973.) True course and dist. of this part of SE end line of the "Porina" are therefore N.38°E., 4.42 chs.
19.90	From Cor. No.2 of "Golden State" pat. lode claim, M.S.2973, S.59°15'E., on random line, on NE side line of the claim. Intersect Cor. No.3. True course and dist. of the NE side line of the claim are therefore S.59°15'E., 19.90 chs.
9.20	Thence, S.38°W., on random line, on SE end line of the "Golden State". Intersect Cor. No.4-1 of "Golden State" and "San Francisco" claims. From Cor. No.2 of the "San Francisco" claim, S.47°13'E., on random line, on NE side line.
22.69	Intersect Cor. No.3. True course and dist. of the NE side line are therefore S.47°13'E., 22.69 chs.
9.20	Thence, S.38°W., on random line, on SE end line of claim. Intersect Cor. No.4. True course and dist. of the SE end line are therefore S.38°W., 9.20 chs.
22.69	Thence, N.47°13'W., on random line, on SW side line of claim. Intersect Cor. No.1. True course and dist. of the SW side line are therefore N.47°13'W., 22.69 chs.

M.S. 1957 in Secs. 8 and 9

M.S. 1999 in Sec. 8

M.S. 1957 in Sec. 8

M.S. 2490 in Sec. 8

M.S. 2489 in Sec. 8

M.S. 2973 in Secs. 8, 9 and 16



Retracement of patented Mining claims in T.8 N., R.3 W.

Chains

Min. Surv. No. 2973 in Secs. 8 and 17.

- From Cor. Nos. 1 and 4 of the "San Francisco" and "Golden State"; S.47°13'E., on true line, on SW side line of "San Francisco" claim.
- 2.41 Intersect the SE end line of the "Buekhorn" pat. lode claim, (Min. Sur.No.2973) at 8.56 chs. N.38°35'E., of Cor. No.4 of the "Buekhorn".  
True course and dist. of this part of the SE end line of the "Buekhorn" are therefore S.38°35'W., 8.56 chs. Thence, S.10°11'W., on random line, on part of the SE side line of the "Gilbert House" pat. lode claim, (Min. Sur. No.2973.)
- 20.80 Intersect Cor. No.3.  
True course and dist. of this part of SE side line of claim are therefore S.10°11'W., 20.80 chs.  
Thence, N.80°09'W., on random line, on S. end line.
- 9.09 Intersect Cor. No. 4.  
True course and dist. of the S. end line are therefore N.80°09'W., 9.09 chs.  
Thence, N.10°11'E., on random line, on NW side line of claim.
- 22.73 Intersect Cor. No.1.  
True course and dist. of NW side line are therefore N.10°11'E., 22.73 chs.  
From Cor. No.3 of the "Bullion" pat. lode claim, Min. Sur. No.2973, the SW cor. (4) of the "Gilbert House" pat. lode claim, brs.N.10°11'E., 2.30 chs.  
From Cor. No. 3 of the "Bullion", N.50°16'W., on random line, on SW side line of claim.
- 22.73 Intersect Cor. No.2.  
True course and dist. of the SW side line are therefore S.50°16'E., 22.73 chs.  
Thence, N.10°11'E., on random line, on W. end line of claim.
- 10.42 Intersect Cor. No.1.  
True course and dist. of W. end line are therefore S.10°11'W., 10.42 chs.  
Thence, S.50°16'E., on random line, on NE side line of claim.
- 22.73 Intersect Cor. No.4, on NW side line of the "Gilbert House" pat. lode claim. True course and dist. of the NE side line of claim are therefore N.50°16'W., 22.73 chs.

Min. Sur. No.2418  
in  
secs. 16, 17, 20 and 21.

- Beginning at Cor. No.1 of the "Batholdi".
- 21.06 Thence, N.47°08'W., on random line, on NE side line. Intersect Cor. No.2. True course and dist. of the NE side line are therefore N.47°08'W., 21.06 chs.  
Thence, S.52°40'W., on random line, on NW end line of the "Batholdi".
- 9.00 Intersect Cor. No.3.  
True course and dist. of the NW end line are therefore S.52°40'W., 9.00 chs.  
Thence, N.52°35'W., 98 lks. to the NEC Cor. of the "Nogi". From NEC Cor. of the "Nogi", S.52°34'W., on random line, on N. end line.
- 4.54 Intersect Cor. No.3. True course and dist. are therefore S.52°34'W., 4.54 chs.  
Thence, S.26°45'E., on random line, on SW side line.
- 22.55 Intersect Cor. No.4. True course and dist. are therefore S.26°45'E., 22.55 chs.

## Retracement of Patented Mining Claims in T.8 N., R.3 W.

Chains	Thence, S.33°33'E., on random line, on SW side line of the "Meter Hill".
22.72	Intersect Cor. No.4. True course and dist. of the SW side line are therefore S.33°33'E., 22.72 chs.
9.07	Thence, N.53°34'E., on random line, on SE end line. Intersect Cor. No.1. True course and dist. of the SE end line are therefore N.53°34'E., 9.07 chs.
22.73	Thence, N.33°33'W., on random line, on NE side line of the "Meter Hill". Intersect Cor. No.2. True course and dist. of NE side line are therefore N.33°33'W., 22.73 chs.
22.49	Thence, N.26°45'W., on random line, on NE side line of the "Nogi". Intersect Cor. No.2. True course and dist. of the NE side line are therefore N.26°45'W., 22.49 chs.
6.32	At a point on the NE side line of the "Nogi", 9.45 chs. N.26°45'W. of Cor. No.1, intersect the SW side line of the "Batholdi" claim. Thence, S.46°22'E., on random line on SW side line. Intersect Cor. No.4. True course and dist. of this part of the SW side line are therefore S.46°22'E., 6.32 chs.
9.14	Thence, N.52°40'E., on random line, on NW end line of the "Chadwick" and SE end line of the "Batholdi". Intersect Cor. Nos.1 and 2 of the "Batholdi" & "Chadwick".
1.20	Thence, S.37°20'E., on random line, on part of the NE side line of the "Chadwick". Intersect Cor. No.3 of the "Montai Hill". True course and dist. of this part of the NE side line are therefore N.37°20'W., 1.20 chs.
6.98	Thence, N.52°40'E., on random line, on NW end line of the "Montai Hill". Intersect Cor. No. 2. True course and dist. of the NW end line are therefore S.52°40'W., 6.98 chs.
8.18	From Cor. No.4 of the "Accident". Thence, S.84°23'E., on random line, on S. end line. Intersect Cor. No.1. True course and dist. of S. end line are therefore S.84°23'E., 8.18 chs.
20.56	Thence, N.5°37'E., on random line, on E side line of the "Accident". Intersect Cor. No.2. True course and dist. of the E. side line are therefore N.5°37'E., 20.56 chs.
-----	
Min. Sur. No:2649 in secs. 15, 16; 21 and 22.	
19.08	Beginning at Cor. No.1 of the "Pera". Thence, S.56°E., on random line on NE side line of claim. Intersect Cor. No.4. True course and dist. of NE side line are therefore N.56°W., 19.08 chs.
9.10	Thence, S.60°W., on random line, on SE end line of claim. Intersect Cor. No.3. True course and dist. of SE end line are therefore N.60°E., 9.10 chs.
19.08	Thence, N.56°W., on random line, on SW side line. Intersect Cor. No.2. True course and dist. of SW side line are therefore S.56°E., 19.08 chs.

Retracements of Patented Mining Claims in T. 8 N. R. 3 W.

Chains	
9.10	Thence, N.60°E., on random line, on NW end line. Intersect cor. No.1. True course and dist. of NW end line are therefore S.60°W., 9.10 chs.
8.97	From cor. No.4 of the "Cycle". Thence, N.56°W., on random line, on NE end line of the "Cycle". Intersect cor. No.1. True course and dist. are therefore N.56°W., 8.97 chs. for the NE end line.
7.25	Thence, S.60°W., on random line, on part of the NW side line of the "Cycle". Intersect cor. No.4 of the "Demon". True course and dist. of this part of the NW side line are therefore S.60°W., 7.25 chs.
1.18	Thence, N.56°W., on random line, on part of the NE side line of the "Demon". Intersect cor. No.3 of the "Ramona". True course and dist. of this part of the NE side line are therefore N.56°W., 1.18 chs.
21.49	Thence, N.53°52'E., on random line on SE side line of the "Ramona". Intersect cor. No.4. True course and dist. of the SE side line are therefore N.53°52'E., 21.49 chs.
9.04	Thence, N.56°W., on random line, on NE end line of claim. Intersect cor. No.1 of the "Ramona". True course and dist. of NE end line are therefore N.56°W., 9.04 chs.
21.50	Thence, S.53°52'W., on random line, on NW side line of claim. Intersect cor. No.2 of the "Ramona", on NE side line of the "Demon". True course and dist. of NW side line of the "Ramona" are therefore S.53°52'W., 21.50 chs.
9.09	Thence, S.56°E., on random line, on SW end line of "Ramona". Intersect cor. No.3. True course and dist. of the SW end line of the "Ramona" are therefore S.56°E., 9.09 chs.
7.48	From cor. No.4 of the "Demon". Thence, S.60°W., on random line, on SE end line of claim. Intersect cor. No.3. True course and dist. of SE end line are therefore N.60°E., 7.48 chs.
6.03	Thence, N.59°32'W., on random line, on SW side line of the "Demon". Intersect cor. No.1 of the "Belita". True course and dist. are therefore S.59°32'E., 6.03 chs. for this part of the SW side line.
13.13	Thence, N.59°32'W., on random line, on N. end line of the "Belita".
9.10	Intersect cor. No.2 of the "Belita". True course and dist. of the N. end line of the "Belita" are therefore N.59°32'W., 9.10 chs.
8.23	Thence, N.58°45'W., on true line, on SW side line of the "Demon" to d's flag visible on cor. No.2. Intersect cor. No.2. True course and dist. of this part of the SW side line are therefore S.58°45'E., 8.23 chs.
22.45	From cor. No.2 of the "Belita", thence, S.4°20'W., on random line, on W. side line. Intersect cor. No.3. True course and dist. of the W. side line are therefore S.4°20'W., 22.45 chs.

## Retracement of Patented Mining Claims in T. 8 N., R. 3 W.

Chains

Mineral Survey No. 4039  
in  
secs. 4 and 9.

- Beginning at Cor. No. 4 of the "Prescott No. 2," thence,  
N. 76° 11' E., on random line, on the NW end line of  
that claim.
- 8.60 Intersect Cor. No. 1 of the "Prescott No. 2" and Cor. No. 4  
of the "Alaska." True course and dist. of the NW end  
line are therefore N. 76° 11' E., 8.60 chs.
- Continue line, on random, on the NW end line of the  
"Alaska".
- 9.09 Intersect Cor. No. 1. also Cor. No. 4 of the "Canton."  
True course and dist. of the NW end line of the "Alaska"  
are therefore N. 76° 11' E., 9.09 chs.  
Thence, N. 76° 11' E., on random line, on NW end line of  
the "Canton".
- 8.94 Intersect Cor. No. 1.  
True course and dist. of the NW end line of the "Canton,"  
are therefore, N. 76° 11' E.; 8.94 chs.  
Thence, S. 15° 09' E.; on random line, on the NE side line  
of the "Canton" claim.
- 22.73 Intersect Cor. No. 2.  
True course and dist. of the SW side line are therefore  
S. 15° 09' E.; 22.73 chs.

Mineral Survey No. 1536  
in  
secs. 3, 4, 9 and 10.

- Beginning at Cor. No. 1 of the "Mountain Chief," pat. lode  
mining claim.  
Thence, S. 35° 48' W., on random line, on SE side line of  
claim.
- 22.16 Intersect Cor. No. 2.  
True course and dist. of the SE side line are therefore  
S. 35° 48' W.; 22.16 chs.  
Thence, N. 54° W., on random line, on SW end line of claim.
- 9.00 Intersect Cor. No. 3.  
True course and dist. of the SW end line are therefore  
N. 54° W., 9.00 chs.  
Thence, N. 36° E., on random line, on NW side line.
- 22.09 Intersect Cor. No. 4.  
True course and dist. of the NW side line are therefore  
N. 36° E., 22.09 chs.  
Thence, S. 54° E., on a random line, on NE end line of  
claim.
- 9.09 Intersect Cor. No. 1.  
True course and dist. of the NE end line are therefore  
S. 54° E., 9.09 chs.
- From Cor. No. 4 of the "Sampson," pat. lode claim, N. 35° 48' E.,  
on random line, on the NW end line of the "Sampson".
- 4.23 Intersect Cor. No. 3; True course and dist. of this part  
of the NW end line are therefore S. 35° 48' W., 4.23 chs.  
Thence, N. 41° 30' E., on random line, on part of the NW  
end line.
- 4.40 Intersect Cor. No. 2. True course and dist. of this part  
of the NW end line are therefore S. 41° 30' W., 4.40 chs.  
Thence, S. 47° 09' E., on a random line, on the NE side  
line of claim.
- 11.16 Intersect Cor. No. 1; True course and dist. of the NE side  
line are therefore N. 47° 09' W., 11.16 chs.

Retracement of Patented Mining Claims in T.8 N., R.3 W.

Chains		M.S. No. 4024 in Sec. 10 M.S. No. 1530 in Sec. 10 M.S. No. 3132 in Sec. 10
	Thence, S.41°30'W., on a random line, on SE end line of the claim.	
9.00	Intersect Cor. No.5. True course and dist. of the SE end line are therefore N.41°30'E., 9.00 chs.	
10.73	Thence, N.45°30'W., on a random line, on SW side line. Intersect Cor. No.4. True course and dist. of the SW side line are therefore S.45°30'E., 10.73 chs.	
		<u>Mineral Surveys Nos. 4024, 1530, 3132, in secs. 10 and 11.</u>
6.76	Beginning at Cor. No.4 of the "Jenny Lyn", Min. Sur. No. 4024. Thence, S.51°23'W., on random line, on NW end line of the "Delaware" patented lode claim, Min. Sur. No. 4024. Intersect Cor. No.1 of the "Delaware" pat. lode claim. True course and dist. of this part of the NW end line of claim are therefore N.51°23'E., 6.76 chs.	
22.74	Thence, S.50°25'E., on random line, on SW side line of claim. Intersect Cor. No.4. True course and dist. of the SW side line are therefore N.50°25'W., 22.74 chs.	
4.47	Thence, S.51°W., on a random line, on NW end line of the "Azurite Copper" pat. lode claim, Min. Sur. No. 1530. Intersect Cor. No.1. True course and dist. of this part of the NW end line are therefore N.51°E., 4.47 chs.	
22.20	Thence, S.39°E., on random line, on SW side line of claim. Intersect Cor. No.3. True course and dist. of the SW side line are therefore N.39°W., 22.20 chs.	
22.73	Thence, S.43°40'E., on a random line, on SW side line of the "Copper Prince", Min. Sur. No. 1530. Intersect Cor. No.3. True course and dist. are therefore N.43°40'W., 22.73 chs. for the SW side line.	
20.49	Thence, S.43°40'E., on random line, on SW side line of the "Yellow Kit" pat. lode claim, Min. Sur. No. 1530. Intersect Cor. No.3. True course and dist. of the SW side line are therefore N.43°40'W., 20.49 chs.	
8.75	Thence, N.51°E., on random line, on SE end line of the "Yellow Kit" claim. Intersect Corner No.2 of the "Yellow Kit", also Cor. No. 3 of the "Atlas" claim, Min. Sur. No. 1530. True course and dist. of the SE end line are therefore S.51°W., 8.75 chs.	
8.92	Thence, N.51°E., on random line, on the SE end line of the "Atlas" claim. Intersect Cor. No.2; True course and dist. of the SE end line are therefore S. 51°W., 8.92 chs.	
13.11	Thence, N.43°40'W., on random line, on part of the NE side line of the "Atlas" claim. Intersect Cor. No.3. of the "Copper Zone" pat. lode claim. True course and dist. of this part of the NE side line are therefore S.43°40'E., 13.11 chs.	
8.84	Thence, N.51°E., on random line, on the SE end line of the "Copper Zone". Intersect Cor. No.2, on SW side line of the "Wren No.4" claim, M.S. 3132. True course and dist. of the SE end line are therefore S.51°W., 8.84 chs.	
2.33	Thence, S.47°50'E., on random line, on part of the SW side line of the "Wren No.4" M.S. 3132. Intersect Cor. No.3. True course and dist. of this part of the SW side line of "Wren No.4" are therefore N.47°50'W., 2.33 chs.	

Retracements of Patented Mining Claims in T.8 N., R.3 W.

MINERAL SURVEY No. 3132 in Secs. 10 & 11

M.S. 1530  
in Sec. 10

Chains	
	Thence, N.45°30'E., on random line on the SE end line of the "Wren No.4"
5.71	Intersect Cor. No.2. True course and dist. are therefore S.45°30'W., 5.71 chs.
	Thence, N.47°36'W., on random line, on NE side line.
3.43	Intersect Cor. No.3 of the "Wren No.3". True course and dist. of this part of the NE side line are therefore S.47°36'E., 3.43 chs.
	Thence, N.45°30'E., on random line on SE end line of the "Wren No.3".
7.78	Intersect Cor. No.2; True course and dist. of the SE end line are therefore S.45°30'W., 7.78 chs.
	Thence, N.47°36'W., on random line, on NE side line of the "Wren No.3".
18.17	Intersect Cor. No.1. True course and dist. of the NE side line are therefore S.47°36'E., 18.17 chs.
	Thence, N.45°30'E., on random line, on part of SE side line of the "Wren No.2".
5.87	Intersect Cor. No.4. True course and dist. are therefore N.45°30'E., 5.87 chs.
	Thence, N.40°04'W., on random line on NE end line of the "Wren No.2".
9.10	Intersect Cor. No.1 of the "Wren No.1".
	Continue line and measurement, on NE end line of "Wren No.1".
13.26	Intersect Cor. No.4 of the "Wren No.1". True course and dist. of NE end lines of "Wren No.2" and "Wren No.1" combined, are therefore N.40°04'W., 13.26 chs.
	Thence, S.45°30'W., on random line, on part of the NW side line of the "Wren No.1".
4.06	Intersect the NE end line of the "Gray Dick" pat. lode claim, M.S. No. 1530 at 4.28 chs. S.40°04'E. of Cor. No.4 thereof. True course & dist. are therefore, N.45°30'E., 4.06 chs.
	From Cor. No.4, S.59°25'W., on random line; on NW side line of the "Gray Dick" claim.
4.57	Intersect NE side line (4-1) of "Black Diamond" pat. lode claim, M.S. 4024, at 4.1 chs. N.45°30'W. from Cor. No.1 thereof. True course & dist. of this part of NW side line of "Gray Dick" claim are therefore N.59°25'E., 4.57 chs.

Min. Sur. No. 4024  
in secs. 3, 4, and 10.

	Beginning at Cor. No.4 of the "Jenny Lyn", pat. lode claim. Thence, N.21°22'W., on random line, on the SW side line of the claim.
22.64	Intersect Cor. No.1. True course and dist. of the SW side line are therefore N.21°22'W., 22.64 chs.
	Thence, N.51°23'E., on true line, on NW end line, to red flag visible on Cor. No.2 thereof.
3.80	Intersect SW side line (4-1) of "S and J" pat. lode claim at 11.03 chs. S.45°12'E. from Cor. No.1 thereof of the "S and J" pat. lode claim.
	From Cor. No.1, N.60°54'E., on random line, on NW end line of the "S. and J." claim.
9.26	Intersect Cor. No.2. True course and dist. for the NW end line are therefore N.60°54'E., 9.26 chs.


Survey of the subdivision Lines of T.3 N., R.3 W.

Chains							
	From the corner of secs. 1, 2, 35 and 36, on the S. bdy. of Tp., hereinbefore described.						
	N.0°01'W., on true line, bet. secs. 35 and 36.						
	Over mountainous land, thru scattering timber & undergrowth.						
11.60	Desc. 88 ft. over rolling NW slope.						
	Wash, (NE fork of San Domingo wash) course SW, in bottom of Canyon 1 ch. wide.						
	Asc. 179 ft. over rolling SE slope.						
26.10	Spur, brs. SW. Desc. 47 ft. over NW slope.						
33.30	Wash, 10 lks. wide, course SW. Asc. 136 ft. over S. slope.						
39.20	Spur, brs. SW. Asc. gradually up top of same spur to						
40.00	Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the 1/4 sec. cor. of secs. 35 & 36, with brass cap marked						
	<table border="1" style="margin: auto;"> <tr><td colspan="2">1/4</td></tr> <tr><td>S35</td><td>S36</td></tr> </table>	1/4		S35	S36		
1/4							
S35	S36						
	1930 from which, a mesquite, 8 ins. in diam., brs. S.14°E., 128 lks. dist., marked 1/4 S36 BT						
	No other tree available; raise a mound of stone 3 ft. base, 1 1/2 ft. high W. of cor. 3 ft. distant.						
	Desc. 29 ft. over NW slope.						
45.00	Wash, 5 lks. wide, course W. Asc. 36 ft. over SE slope.						
46.60	Spur, brs. W. Desc. 20 ft. over NW slope.						
47.65	Small wash, course SW. Asc. 49 ft. over SE slope.						
52.00	Ridge, brs. NE-SW. Desc. 30 ft. over NW slope.						
53.00	Wash, 10 lks. wide, course SW. Asc. 172 ft. over rolling SW slope:						
62.40	Spur, brs. W. Desc. 20 ft. over NW slope.						
64.40	Head of wash, course W. Asc. 20 ft. over S. slope.						
65.60	Spur, brs. W. Desc. 50 ft. over N. slope.						
70.70	Wash, 10 lks. wide, course SW. Asc. 136 ft. over S. slope.						
78.20	Spur, brs. W. Desc. 28 ft. over N. slope to						
80.00	Set an iron post 3 ft. long, 2 ins. in diam., 22 ins. in the ground to bedrock, deposit an iron bolt 1 x 8 ins. at base of post, raise a mound of stone about post, for the cor. of secs. 25, 26, 35 and 36, with brass cap marked						
	<table border="1" style="margin: auto;"> <tr><td>T8N</td><td>R3W</td></tr> <tr><td>S26</td><td>S25</td></tr> <tr><td>S35</td><td>S36</td></tr> </table>	T8N	R3W	S26	S25	S35	S36
T8N	R3W						
S26	S25						
S35	S36						
	1930 from which, a madrono, 4 ins. in diam., brs. S.50°W., 54 lks. dist., marked T8N R3W S35 BT						
	a madrono, 6 ins. in diam., brs. N.53°W., 43 lks. dist., marked T8N R3W S26 BT						
	No other bearing trees available.						
	Land, mountainous.						
	Soil, rocky 4th. rate.						
	Timber, mesquite and madrono.						
	Undergrowth, cacti, paloverde and palochristo.						
	-----						
	East, on random line, bet. secs. 25 and 36.						
40.00	Set temp. 1/4 sec. cor.						
80.10	Fall 11 lks. N. of the cor. of secs. 25, 30, 31 and 36, on E. Bdy. of Tp., which is an iron post, 2 ins. diam., projecting 18 ins. above ground, firmly set in ground and mound of stone, and properly marked on brass cap. No bearing trees or other accessories.						

Survey of the Subdivision Lines of T.8 N., R.3 W.

Chains


Thence,  
 N. 89° 55' W., on true line, bet. secs. 25 and 36.  
 Over mountainous land, thru scattering timber & undergrowth.  
 Asc. gradual SE slope.  
 .40 Ridge, brs. NE-SW. Desc. 51 ft. over NW slope.  
 8.50 Head of wash, course NE. Asc. 146 ft. over N. slope to ridge.  
 13.28 Intersect the NE end line (2-3) of the Trilby pat. lode mining claim, Min. Sur. No. 1307; at 3.26 chs. S. 39° 47' E. of Cor. No. 2. Thence across pat. mineral land.  
 18.35 Intersect the NW side line, (1-2) of the Trilby pat. lode mining claim; at 3.90 chs. S. 49° 55' W. of Cor. No. 2 thereof. Leave pat. mineral land.  
 20.00 Ridge, brs. NW-SE. Desc. gradual SW slope.  
 24.35 Head of wash, course SE. Asc. 40 ft. over S. slope.  
 25.35 Ridge, brs. NE-S. Desc. 129 ft. over NW slope.  
 30.10 Head of wash, course NE. Asc. 40 ft. over NE slope.  
 35.10 Ridge, brs. NW-SE. Desc. gradual SW slope.  
 39.10 Wash, course SE. Asc. gradual SE slope.  
 40.05 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, deposit an iron bolt 1 x 8 ins. at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 25 and 36, with brass cap marked



1930 No bearing trees available. Asc. 57 ft. over SE slope.  
 42.50 Ridge, brs. NE. Asc. 57 ft. along N. slope.  
 48.60 Ridge, brs. NW-SE. Desc. gradual SW slope.  
 52.50 Wash, near head, course SE. Asc. 57 ft. over SE slope.  
 57.60 Divide, brs. NW-SE. Desc. 57 ft. over SW slope.  
 63.50 Wash, near head, course SE. Asc. 42 ft. over SE slope.  
 68.50 Ridge, brs. N-S. Desc. 80 ft. over SW slope.  
 74.80 Spur, brs. SW. Desc. 74 ft. over NW slope to  
 80.10 The cor. of secs. 25, 26, 35 and 36.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, mesquite and madrono.  
 Undergrowth, cacti, palochristo and catclaw.

N. 0° 01' W., on true line, bet. secs. 25 and 26.  
 Over mountainous land, thru scattering timber & undergrowth.  
 Desc. 91 ft. over N. slope.  
 3.40 Wash, 5 lks. wide, course W. Asc. 34 ft. over SW slope.  
 10.50 Spur, brs. W. Desc. 52 ft. over NW slope.  
 14.25 Wash, 5 lks. wide, course SW. Asc. 203 ft. over SE slope to spur.  
 25.00 Trail, brs. E-W.  
 26.75 Divide of Wickenburg Mountains, brs. W. and SE, (about 2 chs. W. of small peak about 30 ft. above line pt.) Desc. 202 ft. over NW slope.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 22 ins. in the ground to bedrock, deposit an iron bolt 1 x 8 ins. at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 25 and 26, with brass cap marked




1930 from which,



Survey of the Subdivision Lines of T.8 N., R.3 W.


Chains

a madrono, 8 ins. in diam., brs. S.4°00'W., 167 lks. dist., marked  $\frac{1}{4}$  S26 BT  
 No other tree available.  
 Desc. 14 ft. over W. slope.  
 42.00 Spur, brs. NW. Continue desc. of 251 ft. over NE slope.  
 57.00 Rocky wash, 30 lks. wide, course E. In bottom of canyon about 2 chs. wide, and at mouth of side canyon from S.15°W. Asc. 293 ft. over S. slope.  
 70.70 Spur, brs. SW. Desc. 23 ft. over NW slope.  
 75.65 Head of wash, course SW. Asc. 55 ft. over SW slope.  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, deposit an iron bolt 1 x 8 ins. at base of post. raise a mound of stone about post, for the cor. of secs. 23, 24, 25. and 26, with brass cap marked



1930 from which,  
 a mesquite, 8 ins. in diam., brs., N.31°E., 271 lks. dist., marked T8N R3W S24 BT  
 No other trees available.  
 Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, mesquite, cottonwood and madrono.  
 Undergrowth, cacti, catclaw and palochristo.

S.89°55'E., on a random line, bet. secs. 24 and 25.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.20 Intersect Cor. of secs. 19, 24, 25 and 30, on E. Bdy. of Tp. which is an iron post 2 ins. in diam., firmly set, and projecting 14 ins. above ground and mound of stone, with brass cap properly marked, no bearing trees there.  
 N.89°55'W., on true line, bet. secs. 24 and 25.  
 Over mountainous land, thru thinly scattering timber and undergrowth.  
 Asc. gradual SE slope:  
 1.00 Spur, brs. SW. Desc. 67 ft. over W. slope.  
 4.10 Wash, 30 lks. wide, course SE. Asc. 67 ft. over NE slope.  
 6.20 Spur, brs. SE. Desc. 15 ft. over SW slope.  
 7.80 Wash, 10 lks. wide, course SE. Asc. 136 ft. over SE slope.  
 19.00 Ridge, brs. NW-SE. Desc. 76 ft. over SW slope.  
 25.20 Wash, 15 lks. wide, course SE. Asc. 151 ft. over NE slope.  
 31.20 Spur, brs. SE. Desc. 38 ft. over SW slope to  
 40.10 On short spur, which brs. S., set an iron post 3 ft. long, 1 in. in diam., 22 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post, for the  $\frac{1}{4}$  sec. cor. of secs. 24 and 25, with brass cap marked



1930 from which,  
 a mesquite, 8 ins. in diam., brs. S.50°W., 196 lks. dist., marked  $\frac{1}{4}$  S25 BT  
 No other bearing trees available.  
 Desc. 38 ft. over SW slope.  
 43.30 Center of wash, 50 lks. wide, course SE. Asc. gradually up bottom of same.

## Survey of the Subdivision Lines of T. 8 N., R. 3 W.

Chains	
45.00	Leave wash, from NW; asc. 231 ft. over NE slope.
52.65	Spur, brs. NE. Desc. 35 ft. over NW slope.
54.60	Head of wash, course N. Asc. 60 ft. over NE slope.
58.90	Spur, brs. NE. Desc. gradual NW slope.
60.20	Head of wash, course NE. Asc. 243 ft. over NE slope.
69.00	Ridge, brs. NW and SE. Trail, on same brs. NW-SE. Desc. gradual SW slope.
70.00	Head of wash, course SE. Asc. 124 ft. over NE slope.
77.60	Spur, brs. S. at knoll 30 lks. in diam. Desc. 46 ft. over SW slope.
80.20	The cor. of secs. 23, 24, 25 and 26.
	Land, mountainous. Soil, rocky 4th. rate. Timber, mesquite, madrono and cottonwood. Undergrowth, cacti, catclaw and palochristo.
-----	
	N.0°01'W., on true line, bet. secs. 23 & 24. Over mountainous land, thru scattering timber & undergrowth. Desc. gradual NW slope.
2.80	Wash, near head, course S.20°W. Asc. 30 ft. over SW slope.
4.00	Ridge (in saddle) brs. NW-SE. Desc. 29 ft. over NE slope.
9.00	Wash, near head, course NE. Asc. 15 ft. over SE slope.
10.90	Spur, brs. NE. Desc. 26 ft. over NW slope.
12.40	Wash, near head, course NE. Asc. 56 ft. over SE slope.
14.90	Spur, brs. NE. From which point a spring (Shandleys) brs. S.52°E. Desc. 58 ft. over NW slope.
16.70	Wash, 5 lks. wide, course NE. Asc. 46 ft. over SE slope.
17.50	Spur, brs. NE. Desc. 60 ft. over NW slope.
19.40	Wash, 5 lks. wide, course NE. Asc. 20 ft. over SE slope.
22.40	Spur, brs. NE. Desc. 128 ft. over NW slope.
27.80	Wash, 10 lks. wide, course E. Asc. 215 ft. over S. slope.
36.00	Ridge, brs. E-W. Trail on same, brs. E-W. From which, Shandleys spg., brs. S.42°E. Desc. 131 ft. over NW slope.
39.50	Wash, 10 lks. wide, course NE. Asc. gradual SE slope.
40.00	Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, raise a mound of stone about post, for the $\frac{1}{4}$ sec. cor. of secs. 23 and 24, with brass cap marked
	1930 from which, a madrono, 6 ins. in diam., brs. N.78°E., 65 lks. dist., marked $\frac{1}{4}$ S24 BT a madrono, 6 ins. in diam., brs. S.3°W., 152 lks. dist., marked $\frac{1}{4}$ S 23 BT
42.50	Desc. 36 ft. over NE slope. Wash, 10 lks. wide, course NE. Asc. 18 ft. over SE slope.
48.00	Ridge, brs. NE-SW. Desc. 173 ft. over rolling NW slope.
57.00	Head of wash, course NW. Asc. 30 ft. over SW slope.
60.70 $\frac{1}{2}$	Spur, brs. NW. Desc. 135 ft. over NE slope.
61.40	Wash, 10 lks. wide, course NW. Asc. 15 ft. over SW slope.
66.75	Spur, brs. NW. Desc. 141 ft. over NW slope.
74.00	Wash, 40 lks. wide, course NE. Old road in same. Asc. 17 ft. over SE slope.
76.00	Spur, brs. NE. Desc. 39 ft. over NW slope.
78.65	Wash, 15 lks. wide, course NE. Asc. 17 ft. over SE slope.

Survey of the Subdivision Lines of T.8 N., R.3 W.

Chains							
80.00	Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, deposit a Nehi soda bottle at base of post, raise a mound of stone about post, for the cor. of secs. 13, 14, 23 and 24, with brass cap marked						
	<table border="1"> <tr> <td>T8N</td> <td>R3W</td> </tr> <tr> <td>S14</td> <td>S13</td> </tr> <tr> <td>S23</td> <td>S24</td> </tr> </table>	T8N	R3W	S14	S13	S23	S24
T8N	R3W						
S14	S13						
S23	S24						
	1930 from which, Mardis Mill, (S. end) brs. N.66°20'E., a sharp peak in the Bradshaw Mts., brs. N.60°E. (20 mi.) No bearing trees available.						
	Land, mountainous. Soil, rocky 4th. rate. Timber, madrono, mesquite and a few cottonwood. Undergrowth, cacti, catclaw and palochristo.						
	-----						
40.00	Thence, S.89°55'E., on a random line, bet. secs. 13 & 24. Set temp. $\frac{1}{4}$ sec. cor.						
80.20	Fall 20 lks. N. of the cor. of secs. 13, 18, 19 and 24, on the E. Bdy. of Tp., which is an iron post 2 ins. in diam., firmly set, projecting 12 ins. above ground and with brass cap properly marked and witnessed by a mound of stone W. of cor.						
	Thence, N.89°46'W., on true line, bet. secs. 13 and 24. Over mountainous land, thru scattering timber & undergrowth.						
2.60	Asc. 81 ft. over E. slope.						
7.40	Spur, brs. NE. Desc. 23 ft. over NW slope.						
10.10	Wash, 20 lks. wide, course NE. Asc. 54 ft. over SE slope.						
20.20	Spur, brs. NE. Desc. 31 ft. over NW slope.						
22.90	Wash, 10 lks. wide, course NE. Asc. 191 ft. over SE slope.						
28.00	Spur, brs. NE. Desc. gradual NW slope.						
30.40	Head of wash, course NW. Asc. 47 ft. over E. slope.						
32.50	Spur, brs. N. Desc. 93 ft. over SW slope.						
36.80	Culch, 50 lks. wide, course NW. heads 2 chs. SE.						
40.10	Spur, brs. NW. Desc. 77 ft. over SW slope.						
	On east edge of canyon bottom, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. of secs. 13 and 24, with brass cap marked						
	<table border="1"> <tr> <td><math>\frac{1}{4}</math></td> <td>S 13</td> </tr> <tr> <td></td> <td>S 24</td> </tr> </table>	$\frac{1}{4}$	S 13		S 24		
$\frac{1}{4}$	S 13						
	S 24						
	1930 from which, a mesquite, 8 ins. in diam., brs. N.48°W., 83 lks. dist., marked $\frac{1}{4}$ S13 BT a verde arboris, 5 ins. in diam., brs. S.53°W., 75 lks. dist., marked $\frac{1}{4}$ S24 BT a small house and spring, in this canyon bottom, br. approximately S" about 10 chs. dist.						
40.30	Enter rocky wash, course NE; road brs. NE-SW.						
41.00	Leave wash, asc. 148 ft. over NE slope.						
44.80	Spur, brs. SE. Desc. 40 ft. over SW slope.						
46.00	House, brs. S.20°W. about 8 chs. dist. (same house as at $\frac{1}{4}$ cor. point.)						
51.00	Head of wash, course SE. Asc. 145 ft. over NE slope.						
55.60	Spur, brs. NW. Desc. 130 ft. over SW slope.						
60.85	Wash, 10 lks. wide, course NW. Asc. 21 ft. over N <sup>w</sup> slope.						

## Survey of the Subdivision Lines of T. 8 N., R. 3 W.

## Chains

- 62.70 Spur, brs. NW. Desc. gradula NW slope.  
 66.50 House (Mardis Mining Camp,) brs. N. about 5 chs. dist.,  
 (there is an excellent developed spring of water here.)  
 68.10 Wash, 10 lks. wide, course N. Asc. 22 ft. over gradual E.  
 slope.  
 70.50 Spur, brs. N. Desc. 41 ft. over NW slope.  
 72.30 Wash, 10 lks. wide, course N. Asc. 41 ft. over E. slope.  
 74.00 Spur, brs. N. Desc. 11 ft. over NW slope.  
 76.00 Wash, 40 lks. wide, course NE, road in same.  
 Asc. 29 ft. over NE slope.  
 78.35 Wash, 10 lks. wide, course NE. Asc. 29 ft. over NE slope  
 to  
 80.20 The cor. of secs. 13, 14, 23 and 24.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, mesquite, madrono and cottonwood.  
 Undergrowth, cacti, catalaw and paloverde.

N.0°01'W., on true line, bet. secs. 13 and 14.  
 Over mountainous land, thru scattering timber & under-  
 growth.

- Asc. 54 ft. over SE slope.  
 3.70 Spur, brs. NE. Desc. 147 ft. over NW slope.  
 13.00 Enter wash, course NE; across bottom of same.  
 15.00 Old road, brs. NE-SW.  
 16.65 Leave wash, asc. 84 ft. over SE slope.  
 19.00 Spur, brs. NE. Desc. 55 ft. over NW slope.  
 21.20 Wash, 50 lks. wide, course NE. Asc. 51 ft. over SE slope.  
 26.85 Spur, brs. NE. Desc. 27 ft. over NW slope.  
 28.40 Wash, 10 lks. wide, course NE. Asc. 27 ft. over SE slope.  
 31.35 Spur, brs. NE. Desc. 48 ft. over NW slope.  
 34.00 Enter wash, course NE.  
 37.00 Leave wash; asc. 66 ft. over SE slope.  
 39.50 Short spur, brs. E. Desc. slight NE slope 8 ft. to  
 39.90 Head of wash, course SE. Asc. 15 ft. over SE slope to  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in  
 the ground to bedrock, deposit an iron bolt 2 ins. in  
 diam., at base of post, raise a mound of stone about  
 post. for the 1/4 sec. cor. of secs. 13 and 14, with  
 brass cap marked

S14

S13

1930

from which,

a mound of stone on red peak, about 6 mi. dist., brs.  
 S.25°25'E., V.A. plus 2°04'

The North peak of the Four Peaks in the Mazatzal Mts.  
 about 70 mi. dist., brs. S.71°10'E. plus 0°10' V.A.


No bearing trees available.

Asc. 18 ft. over SE slope.

- 41.10 Spur, brs. E. Desc. 56 ft. over N. slope.  
 42.70 Wash, 5 lks. wide, course NE. Asc. 56 ft. over S. slope.  
 46.00 Spur, brs. E. Desc. 36 ft. over N. slope.  
 47.40 Wash, 10 lks. wide, course E. Asc. 8 ft. over S. slope.  
 50.75 Spur, brs. E. Desc. 13 ft. over N. slope.  
 52.05 Wash, 5 lks. wide, course E. Asc. 19 ft. over S. slope.  
 55.45 Spur, brs. E. Desc. 38 ft. over N. slope.  
 55.00 Enter wash, course E. Over level brushy bottom.  
 58.00 Leave wash bottom; asc. 15 ft. over S. slope.  
 58.90 End of spur, brs. E. Desc. 12 ft. over N. slope.

Survey of the Subdivision Lines of T.8 N., R.3 W.


Chains  
 60.10 Wash, 20 lks. wide, course SE. Asc. 82 ft. over SW slope.  
 65.55 Spur, brs. SE. Desc. 74 ft. over NE slope.  
 71.60 Wash, near entry into Buckhorn Wash, course E.  
 Asc. 62 ft. over S. slope.  
 74.50 Spur, brs. E. Desc. 26 ft. over NE slope.  
 79.00 Buckhorn wash, 60 lks. wide, course East.  
 Road in bottom, brs. E-W.  
 79.70 Asc. 11 ft. over S. slope to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in  
 the ground to bedrock, on 6 in. cross cut in rock,  
 raise a mound of stone about post, for the cor. of  
 secs. 11, 12, 13 and 14, with brass cap marked



1930 from which,  
 a madrono, 6 ins. in diam., brs. S.3°E., 98 lks.  
 dist., marked T8N R3W S13 BT  
 a madrono, 6 ins. in diam., brs. S.2°W., 96 lks.  
 dist., marked T8N R3W S14 BT  
 a cross (+) chiseled in face of outcropping ledge,  
 brs. N.47°E., 7 lks. dist.  
 No other trees available.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, mesquite, madrono and a few cottonwood.  
 Undergrowth, catclaw, cacti and palchristo.

40.00 S. 39°46'E., on a random line, bet. secs. 12 and 13.  
 80.20 Set temp. 1/4 sec. cor.  
 Fall 12 lks. S. of the cor. of secs. 7, 12, 13 and 18  
 on E. Bdy. of Tp., which is an iron post 2 ins. in  
 diam., firmly set, projecting 10 ins. above ground  
 and mound of stone, with brass cap marked properly  
 and witnessed by a mound of stone W. of cor.  
 Thence, N. 89°51'W., on true line, bet. secs. 12 and 13.  
 Over mountainous land, thru scattering timber & under-  
 growth.  
 Desc. 89 ft. over NW slope.  
 3.55 Wash, 10 lks. wide, course SW. Asc. 86 ft. over SE slope.  
 12.85 Spur, brs. SW. Desc. 63 ft. over NW slope.  
 14.90 Head of wash, course SW. Asc. 21 ft. over SE slope.  
 17.50 Spur, brs. S. Desc. 57 ft. over NW slope.  
 21.00 Junction of washes from NW and W. thence SE. Asc. 79 ft.  
 over NE slope.  
 23.70 Spur, brs. SE. Desc. 73 ft. along S. slope.  
 32.90 To junction of washes from NW-S thence SE.  
 Asc. 79 ft. over NE slope.  
 38.55 Spur, brs. SE. Desc. 27 ft. over SW slope.  
 40.10 Set an iron post 3 ft. long, 1 in in diam., 20 ins. in  
 the ground to bedrock, raise a mound of stone about  
 post, for the 1/4 sec. cor. of secs. 12 and 13, with  
 brass cap marked



1930 from which,  
 a mesquite, 6 ins. in diam., brs. N.51°W., 124 lks.  
 dist., marked 1/4 S12 BT  
 a madrono, 8 ins. in diam., brs. S.60°W., 467 lks.  
 dist., marked 1/4 S 13 BT

Survey of the Subdivision Lines of T.8 N., R.3 W.

Chains

- Desc. 16 ft. over SW slope.
- 41.30 Wash, 10 lks. wide, course SE. Asc. 98 ft. over E. slope.
- 46.10 Spur, brs., N. Desc. 17 ft. over W. slope.
- 48.20 Head of wash, course N. Asc. 128 ft. over SE slope.
- 53.00 Spur, brs. NE. thence over top of ridge from W. to SE.
- 58.00 Leave ridge to NW. Desc. 48 ft. over SW slope.
- 64.30 Wash, 5 lks. wide, course S. Asc. 65 ft. over E. slope.
- 67.50 Spur, brs. S. Desc. slight S. slope.
- 74.00 Spur, brs. SW. Desc. 173 ft. over SW slope.
- 78.50 Mouth of wash, from NE. Asc. 12 ft. over SE slope.
- 80.20 The cor. of secs. 11, 12, 13 and 14.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde, mesquite and madrono.  
 Undergrowth, cacti, catchlaw and palochristo.

N.0°01'W., on true line, bet. secs. 11 and 12.  
 Over mountainous land, thru scattering timber & undergrowth.

- 8.15 Asc. 182 ft. over SW slope.
- 14.00 Spur, brs. SW. Desc. 31 ft. over NW slope.
- 15.65 Head of wash, course SW. Asc. 100 ft. over SE slope.
- 21.00 Branch spur, brs. SW.
- 24.90 Main spur, brs. SE. Desc. 25 ft. over NE slope.
- 29.20 Wash, 5 lks. wide, course SE. Heads 2 chs. NW.
- 32.40 Asc. 49 ft. over SW slope.
- 35.75 Ridge, brs. NW-SE. Desc. 69 ft. over N. slope.
- 40.00 Wash, 10 lks. wide, course E. Asc. 75 ft. over S. slope.
- Spur, brs. E. Desc. 93 ft. over NW slope.
- Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit an iron bolt 2 ins. in diam., at base of post. raise a mound of stone about post, for the 1/4 sec. cor. of secs. 11 and 12, with brass cap marked

S11 | S12

1930 from which,

a madrono, 6 ins. in diam., brs. S.85°W., 172 lks. dist., marked 1/4 S11 BT

No other trees available.

- Desc. 81 ft. over NW slope.
- 43.40 Wash, 10 lks. wide, course NE. Asc. 58 ft. over SE slope.
- 47.00 Spur, brs. NE. Desc. 126 ft. over NW slope.
- 53.75 Wash, 30 lks. wide, course E., road in same.
- Asc. 343 ft. over S. slope.
- 59.83 Intersect the SW side line of the "Iron Hill", (1-2) pat. lode mining claim, Min. Sur. No. 1385 at 1.08 chs. N.36°19'W. of Cor. No. 2 thereof.
- Across patented mineral land.
- 71.00 Ridge, brs. NW-SE. Desc. 192 ft. over NE slope.
- 75.33 Intersect the NE side line (3-4) of the "Iron Hill" pat. lode claim at 13.22 chs. N.36°19'W. of Cor. No. 3 thereof.
- Leave patented land.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for the cor. of secs. 1, 2, 11 and 12, with brass cap marked

T8N R3W  
 S2 | S1  
 S11 | S12

1930 from which,

Survey of the Subdivision Lines of T. 8 N., R. 3 W.

Chains	<p>A conical peak, brs. N. 12° 45' W., plus 1° 45' V.A.          No bearing trees available.          Raise a mound of stone 3 ft. base, 1½ ft. high W. of cor. 3 ft. distant.          Land, mountainous.          Soil, rocky 4th rate.          Timber, palo verde, mesquite and madrono.          Undergrowth, oakbrush, catclaw and cacti.</p> <hr/> <p>S. 89° 51' E., on a random line, bet. secs. 1 and 12.</p> <p>40.00 Set temp. ¼ sec. cor.</p> <p>80.16 Fall 16 lks. N. of the cor. of secs. 1, 6, 7 and 12, on E. bdy. of Tp., which is an iron post, 2 ins. in diam, firmly set, projecting 20 ins. above ground and mound of stone. No bearing trees.</p> <p>Thence, N. 89° 44' W., on true line, bet. secs. 1 and 12. Over mountainous land, thru scattering timber and undergrowth. Across "Washington" pat. lode mining claim, M. S. No. 1198. Desc. 6 ft. over gradual W. slope.</p> <p>1.10 Intersect SW. side line (1-2) of "Washington" pat. lode claim, M. S. No. 1198, at 3.04 chs. N. 23° 22' W., from Cor. No. 1, thereof. Leave patented mineral land.</p> <p>5.75 Wash, 10 lks. wide, course S. Asc. 234 ft. over E. slope.</p> <p>14.50 Spur, brs. S. Desc. 98 ft. over W. slope.</p> <p>19.20 Wash, 5 lks. wide, course S. Asc. 7 ft. over E. slope.</p> <p>19.70 Spur, brs. S. Desc. 20 ft. over gradual E. slope.</p> <p>21.80 Wash, 10 lks. wide, course SE. Asc. 147 ft. over NE. slope.</p> <p>28.20 Spur, brs. SE. Over level land.</p> <p>34.20 Spur, brs. S. Desc. gradually over W. slope.</p> <p>37.40 Wash, near head, course S. Asc. 37 ft. over E. slope.</p> <p>39.20 Spur, brs. S. Desc. 6 ft. over SW. slope.</p> <p>40.08 Set an iron post 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, deposit a small track spike at base of post, raise a mound of stone about post, for the ¼ sec. cor. of secs. 1 and 12, with brass cap marked</p> <p style="text-align: center;">¼ <math>\frac{S 1}{S 12}</math> 1930</p> <p>No bearing trees available. Desc. 69 ft. over SW. slope.</p> <p>46.10 Wash, 20 lks. wide, course SE. Asc. 149 ft. over E. slope.</p> <p>51.70 Telephone line brs. S. 75° E., and N. 75° W.</p> <p>55.55 Spur, brs. N. Desc. 59 ft. over NW. slope.</p> <p>57.30 Wash, 10 lks. wide, course NE. Asc. 210 ft. over SE. slope.</p> <p>63.70 Spur, brs. NE. Desc. 14 ft. over gradual NW. slope.</p> <p>68.50 Head of wash, course N. Asc. 14 ft. over NE. slope.</p> <p>70.20 Spur, brs. NW. Asc. 105 ft. over SW. slope.</p> <p>76.45 Wash, 5 lks. wide, course NW. Asc. 25 ft. over NE. slope.</p> <p>78.40 Spur, brs. NW. Desc. 19 ft. over gradual NW. slope.</p> <p>79.50 Wash, 5 lks. wide, course NW. Asc. 6 ft. over NE. slope.</p> <p>80.16 The cor. of secs. 1, 2, 11 and 12.          Land, mountainous.          Soil, rocky, 4th rate.          Timber, palo verde, mesquite and madrono.          Undergrowth, cacti, catclaw and palo christo.</p> <hr/> <p>N. 0° 01' W., on true line, bet. secs. 1 and 2.          Over mountainous land, thru scattering timber &amp; undergrowth. Desc. 40 ft. over N. slope.</p> <p>2.30 Telephone line, brs. E-W.</p> <p>3.15 Intersection of washes from E.-SW-SE, thence NW. Asc. 15 ft. over SW. slope.</p> <p>9.70 Spur, brs. W. Desc. 28 ft. over NW. slope.</p> <p>11.75 Wash, near head, course W. Asc. 62 ft. over SW. slope.</p>
--------	--

Chains  
 17.70 Spur, brs. NW. Desc. 100 ft. over NE. slope.  
 21.40 Head of wash, course NW. Asc. 21 ft. over SW. slope.  
 25.00 Spur, brs. NW. Desc. 166 ft. over NE. slope.  
 31.00 Wash, 10 lks. wide, course NW. Asc. 6 ft. over S. slope.  
 36.80 Spur, brs. NW. Over level top of same.  
 39.15 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (x) at base of post, raise a mound of stone about post for the witness cor. to the  $\frac{1}{4}$  sec. cor. secs. 1 and 2, with brass cap marked.

W C  
 S 2 | S 1  
 1930

No bearing trees available.  
 Desc. 32 ft. over N. slope.  
 40.00 True point for the  $\frac{1}{4}$  sec. cor. of secs. 1 and 2, falls in wash, 40 lks. wide, where it is impracticable to monument the cor., therefore establish witness cor. 85 lks. S.  $0^{\circ} 01' E.$ , as hereinbefore described.  
 Asc. 141 ft. over S. slope.

47.70 Spur, brs. N. from SE. Desc. 106 ft. along W. slope to  
 74.91 Intersect the 2nd Std. Par. N. at 2.56 chs. E. of the Std. cor. of secs. 35 and 36, T. 9 N., R. 3 W., described in Book "A".

At point of intersection set an iron post 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bed rock, deposit a stone marked with a cross (x) at base of post, raise a mound of stone about post, for the closing corner of secs. 1 and 2, with brass cap marked

T 9 N R 3 W  
 S 36  
 S 2 | S 1  
 CC  
 T 8 N R 3 W  
 1930

No trees available.  
 Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, mesquite and palo verde.  
 Undergrowth, cacti, catclaw and palo christo.

From the cor. of secs. 2, 3, 34 and 35, on S. bdy. of Tp. hereinbefore described.  
 N.  $0^{\circ} 01' W.$ , on true line, bet. secs. 34 and 35.  
 Over mountainous land, thru scattering timber and undergrowth.


Desc. 10 ft. over NE. slope.  
 1.75 Wash, 10 lks. wide, course SE. Asc. gradual SW. slope.  
 4.15 Spur, brs. SE. Desc. 10 ft. over NE. slope.  
 5.35 Wash, near head, course E. Asc. 26 ft. over S. slope.  
 7.05 Spur, brs. E. Desc. 50 ft. over N. slope.  
 9.55 Wash, 15 lks. wide, course SE. Asc. 50 ft. over SW. slope.  
 12.06 Spur, brs. SE. Desc. 26 ft. over NE. slope.  
 13.50 Wash, 5 lks. wide, course SE. Asc. 89 ft. over S. slope.  
 16.56 Spur, brs. E. Desc. 58 ft. over N. slope.  
 19.45 Wash, near head, course E. Asc. 58 ft. over S. slope.  
 21.36 Spur, brs. E. Desc. 27 ft. over N. slope.



Survey of the Subdivision Lines of T.8 N., R.3 W.

Chains


- 22.60 Wash, 5 lks. wide, course E. Asc. 96 ft. over S. slope.
- 27.06 Spur, brs. E. Desc. 105 ft. over N. slope.
- 31.70 Wash, 10 lks. wide, course E. Asc. 73 ft. over S. slope.
- 36.60 Spur, brs. E. Desc. 52 ft. over N. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the  $\frac{1}{4}$  sec. cor. of secs. 34 and 35, with brass cap marked.



1930 from which,  
 a catclaw, 4 ins. in diam., brs. S.19°W., 114 lks. dist., marked BT only.  
 a mesquite, 8 ins. in diam., brs. N.18°E., 566 lks. dist., marked  $\frac{1}{4}$  S35 BT

- Desc. 10 ft. over N. slope.
- 40.50 Wash, 10 lks. wide, course SE. Asc. 10 ft. over S. slope.
- 41.50 Short spur, brs. E. Desc. 15 ft. over NE slope.
- 43.00 Wash, 10 lks. wide, course SE. Asc. 53 ft. over SW slope.
- 49.93 Blue spur, brs. SE. Desc. 27 ft. over NE slope.
- 52.30 Wash, 5 lks. wide, course SE. Asc. 40 ft. over SW slope.
- 54.85 Spur, brs. SE. Desc. 44 ft. over NE slope.
- 58.32 Wash, 5 lks. wide, course SE. Asc. 67 ft. over SW slope.
- 62.20 Spur, brs. SE. Desc. 29 ft. over NE slope.
- 68.26 Wash, 30 lks. wide, course SE. Asc. 161 ft. over SW slope.
- 73.25 Spur, brs. W. Desc. 75 ft. over NW slope.
- 77.08 Wash, 10 lks. wide, course SW. Asc. 26 ft. over SE slope to

- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, deposit an iron bolt 2 x 1 $\frac{1}{2}$  ins. at base of post, raise a mound of stone about post, for the cor. of secs. 26, 27, 34 and 35, with brass cap marked



1930 from which,  
 a paloverde, 4 ins. in diam., brs. N.17°W., 59 lks. dist., marked BT only.  
 a paleverde, 4 ins. in diam., brs. N.28°E., 61 lks. dist., marked BT  
 No other trees available.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and palochristo.

- East, on random line, bet. secs. 26 and 35.
- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
- 80.04 Fall 5 lks. S. of the cor. of secs. 25, 26, 35 and 36. Thence, S.89°58'W., on true line, bet. secs. 26 and 35. Over mountainous land, thru scattering timber & undergrowth. Desc. 213 ft. over rolling NW slope.
- 14.50 Wash, 15 lks. wide, course SW. Asc. 26 ft. over SE slope.
- 14.75 Low spur, brs. S. Desc. 8 ft. over SW slope.
- 16.04 Wash, 5 lks. wide, course SE. Asc. 132 ft. over SE slope.

## Survey of the Subdivision Lines of T. 8 N., R. 3 W.

## Chains

- 26.26 Spur, brs. SW. Desc. 115 ft. over W. slope along rocky wash.  
 32.70 Leave wash, course S. Continue slight descent to  
 36.50 Wash, 10 lks. wide, course SW. Asc. 33 ft. over SE slope to  
 40.02 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit an iron bolt 1 x 6 ins. at base of post, raise a mound of stone about post, for the ~~sec.~~ cor. of secs. 26 and 35, with brass cap marked

$$\frac{1}{4} \text{ S } 26$$

$$\text{S } 35$$

1930 from which,

a mine dump, about  $\frac{1}{2}$  mi. dist., brs. S. 11° 55' E. (level).  
 Red Picacho peak, brs. S. 32° 07' E., plus 2° 06' V.A.  
 Highest peak in White Tank Mts., brs. S. 4° 07' W., (level).  
 No bearing trees available.

Asc. gradual SE slope.

- 43.90 Spur, brs. SW. Desc. 119 ft. over W. slope.  
 50.60 Wash, 20 lks. wide, course S. Asc. 151 ft. over E. slope.  
 55.91 Spur, brs. S. Desc. 113 ft. over NW slope.  
 61.30 Wash, 15 lks. wide, course S. Asc. 64 ft. over SE slope.  
 67.20 Spur, brs. SW. Desc. 63 ft. over NW slope.  
 74.10 Wash, 10 lks. wide, course SW. Asc. 33 ft. over SE slope.  
 80.04 Cor. secs. 26, 27, 34 and 35.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, paloverde, mesquite and a few cottonwoods along larger washes.

Undergrowth, cacti, catclaw and palochristo.

N. 0° 01' W., on true line, bet. secst 26 and 27.

Over mountainous land, thru scattering timber and undergrowth.

Asc. 34 ft. over SE slope.

- 2.16 Spur, brs. SW. Desc. 35 ft. over NW slope.  
 7.50 Wash, near head, course SW. Asc. 136 ft. over SE slope.  
 15.10 Spur, brs. SW., Desc. 21 ft. over NW slope.  
 17.35 Wash, near head course SW. Asc. 21 ft. over SE slope.  
 19.50 Spur, brs. SW. Desc. 73 ft. over NW slope.  
 22.40 Wash, 10 lks. wide, course SW. Asc. 54 ft. over SE slope.  
 23.40 Spur, brs. SW. Desc. 25 ft. over NW slope.  
 30.00 Wash, 20 lks. wide, course SW. Asc. 202 ft. over SE slope.  
 37.40 Spur, brs. SW. Desc. gradual NW slope.  
 39.80 Set an iron post 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock, deposit an iron bolt 1 x 3 ins. at base of post, raise a mound of stone about post, for the witness cor. to the  $\frac{1}{2}$  sec. cor. of secs. 26 and 27, with brass cap marked

W C

 $\frac{1}{2}$ 

S 27

S 26

1930

from which,

a mesquite, 4 ins. in diam., brs. N. 89° W., 98 lks. dist., marked BT

a mesquite, 4 ins. in diam.; brs. N. 45 $\frac{1}{2}$ ° E., 190 lks. dist., marked BT

Vulture peak, brs. S. 58° W., V.A. -0° 30'

Highest peak in White Tanks Mts. brs. S. 3° W., -0° 20' V.A.

Desc. slight NW slope.

Survey of the Subdivision Lines of T. 8 N., R. 3 W.

- Chains Desc. gradual NW. slope.
- 40.00 True point for the 1/4 sec. cor. falls in wash, 15 lks. wide, where it is impracticable to monument the corner, therefore establish witness cor. as hereinbefore described. Asc. 56 ft. over SE. slope.
- 42.50 Ridge, brs. NE-SW. Thence across level land.
- 42.80 Trail, brs. NE-SW. Desc. 117 ft. over NW. slope.
- 49.35 Wash, at forks from E. and NE., 20 lks. wide, course SW. Asc. 272 ft. over SE. slope.
- 60.84 Spur, brs. SW. Desc. 72 ft. over NW. slope.
- 64.85 Head of wash, course SW, asc. 127 ft. over SE. slope.
- 68.93 Ridge, brs. NE-SW. Desc. 96 ft. over NW. slope.
- 74.91 Wash, near head, course NW, Asc. gradual SW. slope.
- 78.57 Spur, brs. NW. Desc. 45 ft. over NE. slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for the cor. of secs. 22, 23, 26 and 27, with brass cap marked

T 8 N R 3 W  
 S 22 | S 23  
 S 27 | S 26  
 1930

- From which,
- A madrono, 4 ins. in diam., brs. N. 87° E., 100 lks. dist., marked T 8 N R 3 W S 23 B T.
  - A madrono, 6 ins. in diam., brs. S. 30° E., 290 lks. dist., marked T 8 N R 3 W S 26 B T.
  - A madrono, 6 ins. in diam., brs. S. 80° W., 220 lks. dist., marked T 8 N R 3 W S 27 B T.
  - A madrono, 6 ins. in diam., brs. N. 7° W., 122 lks. dist., marked T 8 N R 3 W S 22 B T.

Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, madrono and mesquite.  
 Undergrowth, cacti, catclaw and palo christo.

- N. 89° 58' E., on random line, bet. secs. 23 & 26.
- 40.00 Set temp. 1/4 sec. cor.
  - 79.90 Fall 18 lks. N. of the cor. of secs. 23, 24, 25 & 26. Thence N. 89° 54' W., on true line, bet. secs. 23 & 26. Over mountainous land, thru scattered timber and undergrowth. Desc. 30 ft. over SW slope.
  - 1.50 Wash, near head, course SW. Asc. 30 ft. over E. slope.
  - 3.60 Spur, bears. S. Desc. 51 ft. over SW. slope.
  - 6.75 Wash, 10 lks. wide, course SW. Asc. 31 ft. over NW. slope.
  - 10.10 Spur, brs. SE. Desc. 126 ft. over SE. slope.
  - 17.20 Wash, course SE. Asc. 42 ft. over NE. slope.
  - 18.70 Spur, brs. SE. Desc. 101 ft. over SW. slope.
  - 27.30 Wash, 1 ch. wide, in deep gulch; course SE. An old pole corral brs. N. 50 lks. dist. Asc. 144 ft. over NE. slope.
  - 30.30 Mine shaft, brs. S. 60 lks. distant; 40 ft. deep.
  - 31.40 Spur, brs. N. Trail, brs. N-S. Desc. 20 ft. over NW. slope.
  - 35.15 Wash, 10 lks. wide, course N. Asc. 137 ft. over E. slope.
  - 39.95 Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground to bed rock, deposit a 20d nail at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 23 and 26, with brass cap marked

S 23  
 S 26  
 1930

- From which:
- A 4-inch cross chiseled in the SW. face of an outcropping ledge, brs. N. 20 1/2° W., 23 lks. dist. also chisel (x) B0 S 23 alongside.
  - A mound of stone on a high red ridge; about 5 miles dist., brs. S. 69° 05' E., plus 1° V. A.
  - Mazatzal peak, in T. 8 N., R. 3 E., brs. S. 83° 23' E., plus 0° 07' V. A.


## Survey of the Subdivision Lines of T. 8 N., R. 3 W.

Chains	No bearing trees available. Asc. 102 ft. over E. slope.
46.65	Spur, brs. NE. Ascend 15 ft. over N. slope to
50.05	Spur, brs. NW. Desc. 40 ft. over SW. slope.
52.20	Head of wash, course NW. Asc. 101 ft. over NE. slope.
57.90	Spur, brs. NW. Desc. 86 ft. over SW. slope.
60.70	Wash, 5 lks. wide, course NW. Asc. 82 ft. over NE. slope.
65.50	Ridge, brs. NW-SE. Desc. 81 ft. over W. slope.
71.35	Wash, 5 lks. wide, course NW. Asc. 30 ft. over NE. slope to
79.90	The cor. of secs. 22, 23, 26 & 27. Land, mountainous. Soil, rocky, 4th rate. Timber, palo verde, mesquite and madrono. Undergrowth, cacti, catclaw and palo christo.
	----- N. 0° 01' W., on true line, bet. secs. 22 and 23. Over mountainous land, thru scattering timber & under- growth. Desc. 32 ft. over NE. slope.
.50	Enter wash, from SE; asc. 30 ft. over SW. slope.
4.00	Leave wash, asc. 30 ft. over SW. slope.
5.00	Spur, brs. W. Cor. of a line of fence posts, bearing N. 5° E. and West, brs. W. 1 ch. dist. Desc. 24 ft. over NW. slope.
8.40	Wash, 10 lks. wide, course SW. Asc. 116 ft. over SE. slope.
12.50	Fence line, brs. NE-SW.
21.10	Ridge, brs. NE-SW. Desc. 51 ft. over NW. slope.
23.50	Head of wash, course NE. Asc. 51 ft. over SE. slope.
25.10	Spur, brs. NE. Desc. 37 ft. over N. slope.
27.10	Same wash as above noted, course NW. Asc. gradual SW. slope.
29.60	Spur, brs. NW. Desc. 48 ft. over NE. slope.
30.30	Wash, 5 lks. wide, course W. Asc. 20 ft. over S. slope.
35.05	Intersect the SW. side line, (3-4) of the "Judge B". pat. lode mining claim, Min. Sur. No. 2933, at 5.17 chs. S. 72° 36' E., on Cor. No. 4 thereof. Thence across pat. mineral land.
37.10	Spur, brs. W. Desc. 14 ft. over N. slope.
38.10	Head of wash, course W. Asc. 20 ft. over S. slope.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit a piece of iron 1 x 2 ins. at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 22 & 23, with brass cap marked
	S 22 ↑ S 23 1930
	From which A catclaw, 4 ins. in diam., brs. N. 81 1/2° W., 97 lks. dist., marked 1/4 S 22 B T. No other tree available. House with old well; brs. S. 77° W., 15 chs. dist. (approx.) USBM 3187 in T. 8 N., R. 4 W., brs. N. 87° W., V.A. - 1° 20'
	Asc. 51 ft. over S. slope.
42.30	Spur, brs. NW. Desc. 57 ft. over NE. slope.
42.60	Head of wash, course NW. Asc. 54 ft. over SW. slope.
47.15 - 49.92	Intersect the NW. end line (1-4) of the "Wild Rose" pat. lode claim, M. S. No. 2933 at 6.50 chs. S. 25° 05' W., of cor. No. 1 thereof. Leave pat. mineral land.
49.95	Old road, brs. NW-SE.
51.70	Divide, brs. NW-SE. Desc. 128 ft. over NE. slope.
53.90 - 56.67	Intersect the SW. side line of the "Mardis" pat. lode claim, M. S. No. 2933 at 2.90 chs. N. 72° 56' W. of Cor. No. 3 thereof. Across pat. mineral land.

Survey of the Subdivision Lines of T. 8 N., R. 3 W.

Chains


57.60 Head of wash, course NE. Asc. 82 ft. over SE slope.  
 60.44 Spur, brs. NE. Desc. 147 ft. over NW slope.  
 61.70 Old road, brs. NE-SW.  
 64.80 Wash; 10 lks. wide, course NE. Asc. 40 ft. over SE slope.  
 65.30 Spur, brs. NE. Desc. 45 ft. over NW slope.  
 67.30 Wash, 10 lks. wide, course NE. Desc. 45 ft. over NE slope.  
 68.70 Spur, brs. E. Desc. 25 ft. over NW slope.  
 70.95 Wash, 10 lks. wide, course NE. Asc. 153 ft. over SE slope.  
 75.60 Spur, brs. E. Desc. 47 ft. over NW slope.  
 77.50 Wash, 10 lks. wide, course E. Asc. 32 ft. over SE slope.  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for the cor. of secs. 14, 15, 22 and 23, with brass cap marked



1930 from which,  
 a madrono, 12 ins. in diam., brs. S. 56° W., 170 lks. dist., marked T8N R3W S23 BT  
 a lone butte on Silver Mtn. (about 15 mi. dist.) brs. N. 57½° E.  
 The South peak of Four Peaks in Mazatzal Mts., brs. S. 71° 10' E. V.A. Zero.  
 No other bearing trees available.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, madrono and mesquite.  
 Undergrowth, cacti, catclaw and oakbrush.

40.00 S. 89° 54' E., on a random line, bet. secs. 14 and 23. Set temp. ¼ sec. cor.  
 79.76 Fall 4 lks. S. of the cor. of secs. 15, 14, 23 & 24. Thence, N. 89° 56' W., on true line, bet. secs. 14 and 23. Over mountainous land, thru scattering timber and thick undergrowth.  
 Asc. 57 ft. over SE slope.  
 2.30 Spur, brs. NE. Desc. 43 ft. over NW slope.  
 4.45 Wash, near head, course NE. Asc. 43 ft. over SE slope.  
 9.00 Spur, brs. NE. Desc. 81 ft. over NW slope.  
 12.60 Wash, 50 lks. wide, course NE. Asc. 61 ft. over SE slope.  
 14.90 Spur, brs. NE. Desc. 47 ft. over NW slope.  
 18.15 Enter E. side of wash, course NE. Over sandy bottom.  
 21.25 Leave wash, course NE; asc. 35 ft. over SE slope.  
 24.55 Spur, brs. NE. Desc. 59 ft. over NW slope.  
 27.00 Wash, 10 lks. wide, course NE. Asc. 47 ft. over SE slope.  
 30.50 Spur, brs. NE. Desc. 20 ft. over NW slope.  
 33.50 Enter large wash, course NE. Across brushy level bottom.  
 37.60 Leave wash, asc. slight SE slope.  
 38.20 Old road, brs. NE-SW.  
 39.70 End of spur, brs. N.  
 39.88 True point for the ¼ sec. cor. falls on washed land, where it is impracticable to monument the corner; establish witness cor. as hereinafter described.  
 40.25 Set an iron post 3 ft. long, 1 in. in diam., 24 ins. in the ground for the witness cor. to ¼ sec. cor. secs. 14 and 23, with brass cap marked



1930  
 High peak in Bradshaw Mts. brs. N. 56° 40' E. + 2° 10' VA

## Survey of the Subdivision Lines of T.8 N., R.3 W.


## Chains

- Leave washed area; asc. 200 ft. over SE slope.
- 45.90 Intersect the SE side line of the "Ozark Extension" pat. lode claim, M.S. No. 2933, at 9.25 chs. N.  $46^{\circ}18'$  E. from Cor. No. 4 thereof. Across patented mineral land.
- 51.85 Spur, brs. SE. Top of butte brs. N. 2 chs. dist. Desc. 106 ft. over SW slope.
- 56.10 Wash, 10 lks. wide, course SE. Asc. 133 ft. over SE slope.
- 65.10 Spur, brs. NE. Desc. 49 ft. over NW slope.
- 68.25 Wash, 10 lks. wide, course NE. Asc. 92 ft. over SE slope.
- 79.50 Spur, brs. NE.
- 79.76 The cor. of secs. 14, 15, 22 and 23.
- Land, mountainous.  
Soil, rocky 4th. rate.  
Timber, mesquite, paloverde and madrono.  
Undergrowth, cacti, catclaw and palochristo.
- 
- N.  $0^{\circ}01'$  W., on true line, bet. secs. 14 and 15.  
Over mountainous land, thru scattering timber & undergrowth.  
Desc. 43 ft. over NW slope, across pat. mineral land.
- 3.70 Wash, 5 lks. wide, course NE. Asc. 18 ft. over SE slope.
- 4.79 Intersect the NW side line (1-2) of the "King Edward" pat. lode mining claim, Min. Sur. No. 2933, at 2.69 chs. N.  $50^{\circ}29'$  E., of Cor. No. 1 thereof. Leave pat. land.
- 2.80 Spur, brs. NE. Desc. 40 ft. over NW slope.
- 8.30 Wash, 10 lks. wide, course NE. Asc. 13 ft. over SE slope.
- 14.20 Spur, brs. NE. Desc. 51 ft. over NW slope.
- 15.20 Wash, 10 lks. wide, course NE. Asc. 15 ft. over SE slope.
- 17.60 End of spur, from W. Desc. 6 ft. over NW slope.
- 18.30 Wash, 10 lks. wide, course E. Asc. 67 ft. over S. slope.
- 22.00 Spur, brs. NE. Desc. 116 ft. over steep NW slope.
- 26.70 Deep gulch, 20 lks. wide, course NE. Asc. 70 ft. over SE slope.
- 29.60 Spur, brs. E. Desc. 20 ft. over N. slope.
- 40:00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for the  $\frac{1}{4}$  sec. cor. of secs. 14 and 15, with brass cap marked
- $\frac{1}{4}$   
 S15 | S14
- 1930 from which,
- a madrono, 6 ins. in diam., brs. S.  $58^{\circ}$  W., 119 lks. dist., marked  $\frac{1}{4}$  S15 BT
- a madrono, 4 ins. in diam., brs. N.  $60^{\circ}$  E., 22 lks. dist., marked  $\frac{1}{4}$  S14 BT
- Desc. 77 ft. over N. slope.
- 45.40 Wash, 10 lks. wide, course SE. Asc. 100 ft. over SW slope.
- 47.70 Spur, brs. NE. Asc. along E. slope.
- 48.90 Desc. 14 ft. over N. slope.
- 53.20 Head of wash, course E. Asc. 24 ft. over S. slope.
- 54.75 Ridge, brs. E-W. Desc. 24 ft. over N. slope.
- 56.75 Head of wash, course NE. Asc. 37 ft. over SE slope.
- 58.40 Spur, brs. NE. Desc. 66 ft. over NW slope.
- 60.35 Wash, 20 lks. wide, course SE. Asc. 66 ft. over SW slope.
- 65.60 Spur, brs. E. Desc. 74 ft. over N. slope.
- 70.30 Wash, 5 lks. wide, course E. Asc. 45 ft. over S. slope.
- 72.50 Spur, brs. E. Desc. 56 ft. over N. slope.
- 77.20 Wash, 10 lks. wide, course E. Asc. 29 ft. over SW slope.

Survey of the Subdivision Lines of T.8 N., R.3 W. BOOK 3894

Chains


79.00 Spur, brs. E. Desc. 27 ft. over N. slope to  
80.00 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, deposit a small track spike at base of post, raise a mound of stone about post, for the cor. of secs. 10, 11, 14 and 15, with brass cap marked



1930 from which,  
a madrono, 6 ins. in diam., brs. S.42°E., 83 lks. dist., marked T8N R3W S14 BT  
No other bearing trees available.

Land, mountainous.  
Soil, rocky 4th. rate.  
Timber, madrono and mesquite.  
Undergrowth, catclaw, caoti, oakbrush and palochristo.

40.00 s. 89°56'E., on a random line, bet. secs. 11 and 14.  
Set temp. 1/4 sec. cor.  
79.74 Fall 18 lks. N. of the cor. of secs. 11, 12, 13 and 14. Thence, N. 89°48'W., on true line, bet. secs. 11 and 14. Over mountainous land, thru scattering timber & undergrowth.  
Desc. 14 ft. over SW slope.  
1.40 Bottom of Buckhorn Canyon, 1 chs wide, course SE.  
Asc. 135 ft. over E. slope.  
5.90 Spur, brs. S.60°E. thence over level spur top.  
10.00 Desc. 49 ft. over SW slope.  
17.30 Wash, 5 lks. wide, course SE. Asc. 49 ft. over SE slope.  
18.80 Spur, brs. SE. Desc. 17 ft. over SW slope.  
20.20 Deep gulch, course S., 10 lks. wide.  
Asc. 25 ft. over NE slope.  
27.60 Spur, brs. SE. Desc. 40 ft. over SW slope.  
34.40 Gulch, 10 lks. wide, course SE.  
asc. 69 ft. over NE slope.  
37.57 Intersect the SE side line of the "Woodrow Wilson" unpatented lode mining claim, Min. Sur. No. 3552, at 1.10 chs. N. 26°08'40"E. of cor. No. 4 thereof.  
Across located mineral land.  
39.00 Spur, brs. SE. Desc. 17 ft. over SW slope.  
39.87 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, deposit a stone marked with a cross (+) at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 11 & 14, with brass cap marked



1930  
No bearing trees available.

Desc. 48 ft. over SW slope.  
42.70 Wash, 20 lks. wide, course SE. Asc. 207 ft. over NE slope.  
47.55 Intersect the NW side line of the "Hughes" unpatented lode mining claim, Min. Sur. No. 3552, at 7.34 chs. S. 27°02'10"W. of Cor. No. 1 thereof. Lv. located mineral land.

## Survey of the Subdivision Lines of T.8 N., R.3 W.

## Chains

- 56.00 Ridge, brs. NW-SE.  
 61.30 Head of wash, course SE. Asc. 64 ft. over NE slope.  
 63.70 Branch spur of ridge, brs. SE. Desc. 76 ft. over SW slope.  
 69.30 Wash, 10 lks. wide, course SE. Asc. 57 ft. over SE slope.  
 75.00 Spur, brs. SE. Desc. 64 ft. over SW slope.  
 79.00 Wash, 10 lks. wide, course SE. Asc. 64 ft. over NE slope.  
 79.74 The cor. of secs. 10, 11, 14 and 15.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, mesquite, paloverde and madrono.  
 Undergrowth, cacti, catclaw and oakbrush.

- N.0°01'W., on true line, bet. secs. 10 and 11.  
 Over mountainous land, thru scattering timber & undergrowth.  
 Desc. 9 ft. over N. slope.  
 .70 Wash, 10 lks. wide, course E. Asc. 207 ft. over steep NW slope.  
 9.40 Spur, brs. E-W. (Knoll, brs. E. 2 chs. dist.)  
 Desc. 208 ft. over N. slope.  
 18.80 Bottom of Buckhorn Canyon, 50 lks. wide, course NE.  
 Road, in same brs. NE-SW. Asc. 88 ft. over S. slope.  
 24.20 Spur, brs. E. Desc. 62 ft. over N. slope.  
 26.50 Wash, 10 lks. wide, course E. Asc. 292 ft. over S. slope.  
 38.80 Spur, brs. E. Desc. 42 ft. over N. slope.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit a track spike at base of post, raise amount of stone about post, for the  $\frac{1}{4}$  sec. cor. of secs. 10 and 11, with brass cap marked

1  
 S10 | S11

1930

an oak, 6 ins. in diam., brs. S.  $35\frac{1}{2}^{\circ}$  E., 151 lks. dist. marked  $\frac{1}{4}$  S11 BT  
 Walkers goat shed; brs. N.  $70^{\circ}$  E.  
 USLM No. 2 in T. 8 N., R. 2 W., brs. N.  $87^{\circ}45'$  E.,  
 USLM No. 1686, brs. N.  $78\frac{1}{2}^{\circ}$  E., 25.35 chs. The monument is a granite stone 14 x 16 x 24 ins. above ground, firmly set, marked USLM 1686 on NE face, witnessed by a mound of stone 5 ft. base, 3 ft. high NE 3 ft. distant.  
 No other bearing trees available.

- Desc. 19 ft. over N. slope.  
 44.20 Head of wash, course E. Asc. 78 ft. over S. slope.  
 44.60 Intersect the SE 2nd line (2-3) of the "Wren No. 3" pat. lode mining claim, Min. Sur. 3132 at 85 lks. S.  $45^{\circ}30'$  W. of Cor. No. 2 thereof. Across pat. mineral land.  
 45.72 Intersect the NE side line, (1-2) of the "Wren No. 3" pat. lode claim, at 80 lks. N.  $47^{\circ}36'$  W., of Cor. No. 2. Leave pat. mineral land.  
 47.25 Spur, brs. E. Desc. 216 ft. over N. slope.  
 55.00 Wash, near head, course E. Asc. 31 ft. over S. slope.  
 59.08 Spur, brs. E. Desc. 82 ft. over N. slope.  
 63.50 Wash, near head, course E. Asc. 11 ft. over SE slope.



Survey of the Subdivision Lines of T.8 N., R.5 W.

Chains

69.40 Spur, brs. NE. Desc. 58 ft. over NW slope.  
 72.95 Wash, 10 lks. wide, course NE. Asc. 58 ft. over SE slope.  
 73.60 Spur, brs. E. Desc. 72 ft. over NW slope.  
 75.30 Wash, 5 lks. wide, course E. Asc. 18 ft. over S. slope.  
 76.30 Old road, brs. E-W.  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (+) at base of post, raise a mound of stone about post, for the cor. of secs. 2, 3, 10 and 11, with brass cap marked

T8N	R5W
S3	S2
S10	S11

1930 from which,  
 a 4 in. cross chiseled on the SE face of outcropping ledge, brs. N.63°45'W., 55 lks. dist. Alongside cross chisel BO S3  
 Conical peak, in Bradshaw Mts., brs. N.77½°E.; about 25 miles dist.  
 Mound of stone on Swallow Mtn., brs. N.72°12'E., Morgan Butte, brs. S.64°W.  
 No bearing trees available.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and oakbrush.

40.00 S.89°48'E., on a random line, bet. secs. 2 and 11.  
 Set temp. ¼ sec. cor.  
 79.86 Fall 23 lks. S. of the cor. of secs. 1, 2, 11 and 12. Thence, N.89°58'W., on true line, bet. secs. 2 and 11. Over mountainous land, thru scattering timber & undergrowth.  
 Desc. 25 ft. over NW slope.  
 3.20 Wash, 10 lks. wide, course NE. Asc. 48 ft. over SE slope.  
 3.43 Intersect the NE side line (3-4) of the "Iron Hill" pat. lode mining claim, Min. Sur. No. 1383, at 3.46 chs. S.36°19'E. of Cor. No. 4 thereof. Across patented mineral land.  
 8.85 Spur, brs. SE. Desc. 23 ft. over SW slope.  
 9.30 Head of wash, course SE. Asc. 23 ft. over NE slope.  
 14.97 Intersect SW side line (1-2) of the "Gypsy" pat. lode mining claim, Min. Sur. No. 1385 at 3.58 chs. N.36°31'W. of Cor. No. 2 thereof. Leave patented mineral land.  
 16.74 Spur, brs. NE. Desc. 55 ft. over W. slope.  
 19.30 Head of wash, course NW. Asc. 55 ft. over NE slope.  
 20.70 Spur, brs. NW. Desc. 20 ft. over N. slope.  
 28.40 Spur, brs. NW. Desc. 81 ft. over W. slope.  
 31.40 Wash, 10 lks. wide, course N. Asc. 107 ft. over E. slope.  
 39.93 Set an iron post 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, deposit a stone marked with a cross (+) at base of post, raise a mound of stone about post for the ¼ sec. cor. of secs. 2 and 11, with brass cap marked

¼	S 2
	S 11

1930  
 No bearing trees available.  
 Asc. 63 ft. over SE slope.  
 42.00 Spur, brs. NE. Asc. 58 ft. over NE slope.  
 47.90 Spur, brs. N. Desc. 150 ft. over SW slope.  
 55.00 Head of wash, course NW. Asc. 8 ft. over NE slope.

Survey of the Subdivision Lines of T.8 N., R.3 W.

Chains

- 29.40 Spur, brs. NW. Desc. 25 ft. over NW slope.
- 65.90 Wash, 10 lks. wide, course N. Asc. 76 ft. over W. slope.
- 70.10 Spur, brs. NW. Road on same, brs. NW-SE.
- 71.80 Desc. 27 ft. over W. slope.
- 73.00 Wash, 10 lks. wide, course N. Asc. 90 ft. over W. slope.
- 79.86 The cor. of secs. 2, 3, 10 and 11.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and oakbrush.

N.0°01'W., on true line, bet. secs. 2 and 3.  
 Over mountainous land, thru scattering timber & undergrowth.

- Desc. 48 ft. over N. slope to wash.
- 3.45 Road, from Groom Mine to Wickenburg, Ariz., brs. NE-SW.
- 4.65 Wash, 10 lks. wide, course NE.  
Asc. 69 ft. over SE slope.
- 9.60 Telephone line, brs. E-W.
- 9.85 Rocky spur, brs. NE. Desc. 153 ft. over NW slope.
- 19.15 Wash, 10 lks. wide, course E. Asc. 92 ft. over S. slope.
- 25.70 Ridge, brs. NE-SW. Desc. 92 ft. over NW slope.
- 31.75 Head of wash, course NW. Asc. 16 ft. over SW slope.
- 34.10 Spur, brs. NW. Desc. 119 ft. over NW slope.
- 39.45 Wash, 10 lks. wide, course NW. Asc. gradual SW slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit a horseshoe at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 2 and 3, with brass cap marked

S3 | S2

1930

No trees available.  
 Asc. 8 ft. over SW slope.

- 41.00 Spur, brs. NW. Desc. 91 ft. over N. slope.
- 46.50 Wash, 10 lks. wide, course W. Asc. 111 ft. over SW slope.
- 55.70 Spur, brs. NW. Desc. 168 ft. over NE slope.
- 64.50 Wash, 10 lks. wide, course W. Asc. 47 ft. over S. slope.
- 67.20 Spur, brs. W. Desc. 140 ft. over N. slope.
- 67.60 Old road, brs. NE-SW.
- 72.69 Intersect the SW side line of the "Bellairs" pat. close to  
 Intaining claim of Milt Surfer No. 153, 2 at 5034 chs of the  
 N126°W or Co. No. 64 thereof. Across pat. in general  
 and in group.
- 73.29 Wash 20 lks wide, course NW, Asc. 66 ft. over SW slope.
- 74.63 Intersect the 12nd. 1st. the par. at 2970 chs. East of  
 the Sta. near. W. of sec. 34 and 35, as described in Book  
 44. About this group, about post, for the closing  
 At point of intersection set an iron post 3 ft. long,  
 2 ins. in diam., 18 ins. in the ground to bedrock,  
 deposit a stone marked with a cross (+) at base of  
 post, raise a mound of stone about post, for the  
 closing cor. of secs. 2 and 3, with brass cap marked

T9N R3W  
 S 35  
 S3 | S2  
 T8N CC R3W  
 1930

No bearing trees available.


Survey of the Subdivision Lines of T.8 N., R.3 W.

Chains

Land, mountainous.  
Soil, rocky 4th. rate.  
Timber, paloverde, mesquite and madrono.  
Undergrowth, cacti, catclaw and palochristo.

From the cor. of secs. 3, 4, 33 and 34, on S. Bdy. of  
Tp., hereinbefore described.  
N.0°02'W., on true line, bet. secs. 33 and 34.

- Over mountainous land, thru scattering timber & undergrowth.
- Desc. 21 ft. over NW slope.
- 2.30 Wash, 10 lks. wide, course SW. Asc. 44 ft. over SE slope.
- 7.45 Spur, brs. SW. Desc. 18 ft. over NW slope.
- 9.15 Head of wash, course SW. Asc. 43 ft. over SE slope.
- 10.95 Spur, brs. SW. Desc. 30 ft. over NW slope.
- 14.52 Wire fence, brs. N.75°E-S.75°W.
- 15.00 Wash, 10 lks. wide, course SW. Asc. 72 ft. over SE slope.
- 22.60 Spur, brs. SW. Desc. 43 ft. over NW slope.
- 23.10 Trail, brs. NE-SW.
- 26.70 Wash, 10 lks. wide, course SW.  
Asc. 114 ft. over SE slope.
- 32.50 Spur, brs. SW. Asc. gradual SW slope.
- 35.00 Small house, brs. S.24°W. about 30 chs. dist.
- 37.55 Spur, brs. SE. Desc. gradual SE slope to
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in  
the ground for the  $\frac{1}{4}$  sec. cor. of secs. 33 and 34,  
with brass cap marked




1930 from which,

a paloverde, 4 ins. in diam., brs. N.5°W., 178 lks.  
dist., marked  $\frac{1}{4}$  S33 BT

a paloverde, 4 ins. in diam., brs. N.35 $\frac{1}{2}$ °E., 99 lks.  
dist., marked  $\frac{1}{4}$  S34 BT

- Desc. 8 ft. over NE slope.
- 40.80 Wash, near head, course SE. Asc. 99 ft. over SW slope.
- 45.90 Spur, brs. SE. Continue along ridge top from N-SW.
- 50.91 Leave ridge from NE. Desc. 34 ft. over NW slope.
- 52.95 Wire fence, brs. N.65°E.-S.65°W. at head of wash, courses  
West. Asc. gradual SW slope.
- 56.20 Desc. 78 ft. over rolling NW slope.
- 60.50 Wash, near head, course SW. Asc. 34 ft. over SW slope.
- 64.56 Spur, brs. SW. Desc. 54 ft. over rolling NW slope.
- 71.80 Wash, 30 lks. wide, course SW. Asc. 60 ft. over SE slope.
- 76.55 Spur, brs. SW. Desc. 19 ft. over NW slope.
- 77.80 Wash, near head, course SW. Asc. 60 ft. up wash to head.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in  
the ground for the cor. of secs. 27, 28, 33 & 34,  
with brass cap marked



1930 from which,

a 6 inch cross chiseled in face of outcropping ledge  
2 x 2 x 3 ft. above ground, brs. S.65°12'W., 91 lks.  
dist. Also chisel BO S33 alongside.

an 8 inch cross chiseled in face of outcropping ledge  
2 ft. above ground, brs. N.74 $\frac{1}{2}$ °E., 24 lks. dist.  
also chisel BO S27 alongside.

## Survey of the Subdivision Lines of T.8 N., R.3 W.

Chains

Vulture peak, brs. S.57°45'W.

Highest peak in the White Tank Mts., brs. S.10°10'W.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, paloverde and mesquite.

Undergrowth, cacti, catclaw and palochristo.

	East, on a random line, bet. secs. 27 and 34.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.96	Fall 5 lks. N. of the cor. of secs. 26, 27, 34 and 35.
	Thence, N.89°58'W., on true line, bet. secs. 27 and 34.
	Over mountainous land, thru scattering timber & undergrowth.
	Asc. slight SE slope.
1.25	Spur, brs. SW. Desc. 80 ft. over NW slope.
5.05	Wash, 10 lks. wide, course SW.
6.10	Spur, brs. S. Desc. 25 ft. over SW slope.
11.10	Wash, 60 lks. wide, course SE. Asc. 52 ft. over NE slope.
21.95	Ridge, brs. NW-SE. Desc. 181 ft. over SW slope.
25.80	Wash, 10 lks. wide, course S. Asc. gradual E. slope.
25.45	Spur, brs. SE. Desc. 17 ft. over SW slope.
27.50	Wash, 5 lks. wide, course SE. Desc. 84 ft. over NE slope.
33.80	Spur, brs. SE. Desc. 17 ft. over SW slope.
37.70	Head of wash, course SE. Asc. 18 ft. over NE slope.
39.98	Set an iron post 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock, deposit a stone marked with a cross (+) at base of post, raise a mound of stone about post, for the $\frac{1}{4}$ sec. cor. of secs. 27 & 34, with brass cap marked
	$\frac{1}{4}$ $\frac{S\ 27}{S\ 34}$
	1930 from which,
	a mesquite, 8 ins. in diam., brs. S.64 $\frac{1}{2}$ °E., 243 lks. dist., marked $\frac{1}{4}$ S34 BT
	No other trees available.
	Asc. slight NE slope.
40.10	Spur, brs. SE. Desc. 66 ft. over SW slope.
45.90	Wash, 50 lks. wide, course SE.
	Asc. 45 ft. over NE slope.
47.75	Spur, brs. SE. Desc. 40 ft. over SW slope.
51.40	Wash, 10 lks. wide, course SE. Asc. 156 ft. over NE slope.
58.95	Spur, brs. SE. Desc. 25 ft. over SW slope.
63.34	Wash, near head, course SE. Asc. 149 ft. over NE slope.
66.50	Spur, brs. SE. Asc. 25 ft. along S. slope.
68.40	Head of wash, course S.
69.95	Spur, brs. S. Desc. 123 ft. over NW slope.
76.08	Wash, 30 lks. wide, course SW. Asc. 54 ft. over NE slope.
79.50	Spur, brs. SE. Desc. slight SW slope to
79.96	The cor. of secs. 27, 28, 33 and 34.

Land, mountainous.

Soil, rocky 4th. rate.


Timber, paloverde and mesquite.

Undergrowth, cacti, catclaw and palochristo.


Survey of the Subdivision Lines of T.8 N., R.3 W.

Chains

N.0°02'W., on true line, bet. secs. 27 and 28.  
 Over mountainous land, thru scattering timber & undergrowth.  
 Asc. 135 ft. over SW slope.  
 5.85 Spur, brs. SE. Along level East slope.  
 9.65 Desc. 46 ft. over NE slope.  
 13.20 Wash, 10 lks. wide, course SE. Asc. 86 ft. over SW slope.  
 17.85 Spur, brs. SE. Desc. 33 ft. over NE slope.  
 20.70 Wash, near head, course SE. Asc. 83 ft. over SW slope.  
 24.20 Ridge, brs. NE-SW. Desc. 46 ft. over NW slope to wash.  
 24.54 Trail, brs. NE-SW.  
 30.80 Wash, near head, course S.80°W. Saddle brs. E. about 5 chs. distant. Asc. 189 ft. over S. slope.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, deposit a small track spike at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 27 and 28, with brass cap marked



from which,  
 a mesquite, 20 ins. in diam., brs. S.45°W., 40 lks. dist., marked 1/4 S28 BT  
 No bearing trees available.  
 Asc. 116 ft. over S. slope.  
 44.80 Ridge, brs. NE-S.70°W. Desc. 200 ft. over N. slope.  
 55.25 Wash, near head, course West. Asc. 100 ft. over S. slope.  
 61.25 Spur, brs. West. Desc. 315 ft. over N. slope.  
 76.10 Wash, 5 lks. wide, course NE. Asc. 34 ft. over SE slope.  
 77.80 Spur, brs. NE. Desc. 69 ft. over NW slope to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post, for the cor. of secs. 21, 22, 27 & 28, with brass cap marked



1930 from which,  
 Mine shed, near tunnel, brs. N.38°W.  
 Mouth of tunnel, brs. N.14°22'W.  
 USLM No.1477 on Denver Hill, brs. N.0°53'W.  
 No bearing trees available.  
 Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde, ironwood and mesquite.  
 Undergrowth, cacti, catclaw and palochristo.

S.89°58'E., on a random line, bet. secs. 22 & 27.  
 40.00 Set temp. 1/4 sec. cor.  
 80.00 Intersect the cor. of secs. 22, 23, 26 and 27.  
 Thence,  
 N.89°58'W., on true line, bet. secs. 22 & 27.  
 Over mountainous land, thru scattering timber & undergrowth.  
 Desc. 79 ft. over NW slope.  
 16.85 Wash, 10 lks. wide, course W. Desc. gradually down same.  
 22.95 Leave wash, turns to SW. Asc. 37 ft. over SE slope.  
 27.85 Spur, brs. SW. Desc. 103 ft. over SW slope.  
 35.35 Wash, 10 lks. wide, course NW. Asc. 20 ft. over NE slope.  
 38.10 Spur, brs. NW. Desc. 16 ft. over SW slope.

## Survey of the Subdivision Lines of T. 8 N., R. 3 W.

Chains

39.60 Wash, 10 lks. wide, course SW. Asc. 6 ft. over SE slope.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in  
 the ground to bedrock, deposit a track spike at base  
 of post, raise a mound of stone about post, for the  
 $\frac{1}{4}$  sec. cor. of secs. 22 and 27, with brass cap marked

$\frac{1}{4}$  S 22  
 S 27

1930 - from which,  
 a mesquite, 8 ins. in diam., brs. N.72°E., 57 lks.  
 dist., marked  $\frac{1}{4}$  S22 BT  
 No other tree available.

44.23 Asc. 67 ft. over SE slope.  
 Spur, brs. SW.  
 Desc. 106 ft. over NW slope.  
 56.74 Wash, 10 lks. wide, course SW.  
 Asc. 24 ft. over SE slope.  
 60.04 Spur, brs. SW. Desc. 29 ft. over NW slope.  
 63.44 Wash, 10 lks. wide, course NW. Asc. 29 ft. over NE slope.  
 72.30 Spur, brs. N. Desc. 29 ft. over W. slope.  
 77.95 Wash, 5 lks. wide, course N. Asc. 32 ft. over E. slope.  
 80.00 The cor. of secs. 21, 22, 27 & 28.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, mesquite, paloverde and madrono.  
 Undergrowth, cacti, catclaw and palochristo.

N.0°02'W., on true line, bet. secs. 21 and 22.  
 Over mountainous land, thru scattering timber & under-  
 growth.

4.81 Desc. 91 ft. over N. slope.  
 Bottom of wash, 30 lks. wide, course W.  
 Asc. 63 ft. over S. slope.  
 9.70 Spur, brs. SW. Desc. 9 ft. over NW slope.  
 16.00 Wash, 10 lks. wide, course SW. Asc. 142 ft. over SE  
 slope.  
 26.47 Spur, brs. SE. Continue ascent over slight SE slope.  
 28.80 Spur, brs. SW. Desc. 40 ft. over NW slope.  
 33.73 Head of wash, course SW.  
 Asc. 29 ft. over S<sup>th</sup> slope.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in  
 the ground to bedrock, deposit a horseshoe at base  
 of post, raise a mound of stone about post, for the  
 $\frac{1}{4}$  sec. cor. of secs. 21 and 22, with brass cap marked

$\frac{1}{4}$

S21

S22

1930 from which,  
 A sharp peak, about 40 mi. dist., brs. N.65°53'W.  
 USLM 1477 on Denver Hill, brs. N.1°24'W.  
 A mine dump, about 8 chs. dist., brs. N.67°W.  
 No bearing trees available.

40.40 Old road, brs. NE-SW. on spur, brs. SW.  
 Desc. 7 ft. over NW slope.

Survey of the Subdivision Lines of T.8 N., R.3 W.

Chains

- 42.90 Head of wash, course SW. Asc. 30 ft. over SW slope.
- 46.95 Ridge, brs. NW-SE. Desc. 101 ft. over NE slope.
- 53.78 Wash, at junction with washes from SE & SW, thence W.  
Asc. 82 ft. over SW slope.
- 58.74 Spur, brs. NW. Trail, on same brs. NW-SE.  
Desc. 69 ft. over NE slope.
- 61.97 Wash, 10 lks. wide, course NW.  
Asc. 66 ft. over SW slope.
- 65.85 Spur, brs. SE.  
Desc. 18 ft. over NE slope.
- 66.81 Intersect the SW side line (2-3) of the Pera patented  
lode mining claim, Min. Sur. No. 2649, at 9.27 chs.  
S.56°E. of Cor. No.2 thereof.  
Across patented mineral land.
- 67.53 Head of wash, course SE.  
Asc. 52 ft. over SW slope.
- 72.30 Spur, brs. SW.  
Desc. 29 ft. over NW slope.
- 75.05 Head of wash, course SW. Asc. 31 ft. over SW slope.
- 76.10 Trail, brs. NE-SW.
- 76.66 Intersect the NE end line (1-4) of the Cycle patented  
lode mining claim, Min. Sur. No.2649, at 22.5 lks.  
N.56°W. of Cor. No.4 thereof.  
Leave patented mineral land.
- 79.80 Spur, brs. West. Asc. slight SW slope to
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins.  
in the ground to bedrock, deposit a stone marked  
with a cross (+) at base of post, raise a mound of  
stone about post, for the cor. of secs. 15, 16, 21  
and 22, with brass cap marked

T8N	R3W
S16	S15
S21	S22


1930 from which,  
 a catclaw, 4 ins. in diam., brs. N.76°E., 10 lks.  
 dist., marked BT only.  
 a catclaw, 4 ins. in diam., brs. S.23°E., 37nlks.  
 dist., marked BT only.  
 No other bearing trees available.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, paloverde, mesquite and ironwood.

Undergrowth, cacti, catclaw and palochristo.



## . Survey of the Subdivision Lines of T. 8 N., R. 3 W.

Chains	
	S. $39^{\circ}58'$ E., on a random line, bet. secs. 15 and 22.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.14	Fall 5 lks. N. of the corner of secs. 14, 15, 22 and 23. Thence, N. $89^{\circ}56'$ W., on true line, bet. secs. 15 and 22. Over mountainous land, thru scattering timber and under- growth. Across patented mineral land, Mineral Survey No. 2933. Asc. 47 ft. over SE slope.
3.20	Spur, brs. NE.
	Desc. 14 ft. over NW slope.
6.50	Wash, 5 lks. wide, course NE.
	Asc. 151 ft. over SE slope.
11.60	Divide, brs. NW and to South; Trail on divide, brs. NW and South.
	Desc. 73 ft. over West slope.
15.20	Wash, 10 lks. wide, course South.
	Asc. 63 ft., over E. slope.
18.20	Spur, brs. SE.
	Desc. 41 ft. over SW slope.
18.84	Intersect the NW side line, (1-4) of the "Houston" patented lode mining claim, Mineral Survey No. 2933, at 8 chs. S. $25^{\circ}05'$ W., of Cor. No. 1 thereof. Leave patented mineral land.
23.60	Wash, 5 lks. wide, course SE.
	Asc. 29 ft. over NE slope.
25.90	Spur, brs. South.
	Desc. 30 ft. over NW slope.
27.90	Trail, brs. NE-SW.
28.70	Head of wash, course West.
	Desc. 104 ft. down sandy bottom of same.
33.00	Leave wash, asc. slight SE slope to
40.07	Set an iron post 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock, deposit a track spike at base of post, raise a mound of stone about post, for the $\frac{1}{4}$ sec. cor. of secs. 15 and 22, with brass cap mar- ked
	S 15
	$\frac{1}{4}$ —————
	S 22
	1930
	No bearing trees available.
	Asc. 19 ft. over SE slope.
46.80	Spur, brs. SW.
	Desc. 57 ft. over NW slope.
54.40	Head of wash, course S.
	Asc. gradual SE slope.
55.40	Spur, brs. S. $80^{\circ}$ W.
	Trail, on same spur, brs. NE-SW.
	Desc. 96 ft. over SW slope.
60.90	Mouth of small wash, course NW.
64.60	Wash, 10 lks. wide, course SW.
	Asc. 88 ft. over SE slope.
66.70	Spur, brs. S. $80^{\circ}$ W.
	Trail, on same spur, brs. N. $80^{\circ}$ E-S. $80^{\circ}$ W.




Survey of the Subdivision Lines of T. 8 N. R. 3 W.

Chains	
74.40	Desc. 21 ft. over North slope. Same spur, brs. NW.
80.14	Desc. 57 ft. over W. slope. The cor. of secs. 15, 16, 21 and 22.
	Land, mountainous. Soil, rocky 4th. rate. Timber, mesquite, madrono and paloverde. Undergrowth, cacti, catclaw and oakbrush.
-----	
5.70	N.0°02'W., on true line, bet. secs. 15 and 16. Over mountainous land, thru scattering timber and undergrowth. Desc. 103 ft. over N. slope. Wash, 10 lks. wide, course W.
8.15	Asc. 65 ft. over S. slope. Slope changes to SW.
9.20	Intersect the SE side line (3-4) of the "Ramona" patented lode mining claim, Mineral Survey No. 2649, at 3.56 chs. S.53°52'W. of Cor. No. 4 thereof.
13.24	Across patented mineral land, Intersect the NE end line (1-4) of the "Ramona" patented lode mining claim at 3.46 chs. N.56°W. of cor. No. 4 thereof.
16.10	Leave patented mineral land. Desc. gradual NW slope.
16.50	Wash, 10 lks. wide, course SW.
24.25	Asc. 251 ft. over SE slope. Rocky spur, brs. SW.
29.40	Desc. 111 ft. over NW slope. Wash, 10 lks. wide, course SW.
31.40	Asc. 249 ft. over SE slope. Intersect the SW side line, (3-4) of the Denver No. 3 patented lode mining claim, Mineral Survey No. 1477, at 6.30 chs. N.40°45'W., of Cor. No. 3 thereof.
38.40	Across patented mineral land. Divide, brs. NE-SW. Line crosses about 2 chs. East of the top of round, knoll known as Denver Hill. U.S.B.M. (Geological Survey establishment) 4370 fitted above sea level; is located on the Southwest face of this knoll, as hereinbefore described.  U.S. Location Monument No. 1477 is located on the top of this knoll, as hereinbefore described.
40.00	Desc: 18 ft. over NE slope to Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone marked with a cross (+) at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 15 and 16, with brass cap marked

Survey of the Subdivision Lines of T.8 N., R.3 W.

Chains



1930 from which,

The south peak of the Four Peaks in the Mazatzal Range of Mountains, about 70 miles distant, brs. S.71°35'E.

A house near Thayers Mine, brs. N.21°08'W, about 1 1/2 mi. Seal Mtn., about 12 miles dist., brs. N.3°32'E.

Desc. 80 ft. over NE slope.

44.19 Intersect the NE side line (1-2) of the "Denver No. 3" patented lode mining claim, Mineral Survey No. 1477, at 6.50 chs. S.41°E., of cor. No. 1 thereof.

Leave patented mineral land.

50.00 Spur, brs. NE. Desc. 377 ft. over NW slope.

64.85 Wash, 10 lks. wide, course NW.

Asc. 44 ft. over SW slope.

72.00 Spur, brs. NW.

Desc. 52 ft. over NE slope.

74.30 Head of wash, course NW.

Asc. 52 ft. over SW slope.

76.60 Spur, brs. NW.

Desc. 33 ft. over NE slope.


78.20 Wash, 20 lks. wide, course West.

Asc. 13 ft. over S. slope.

79.80 Spur, brs. W.

Desc. gradual N. slope.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, deposit a stone marked with a cross (+) at base of post, raise a mound of stone about post, for the cor. of secs. 9, 10, 15 & 16, with brass cap marked



1930

No bearing trees available.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, paloverde, madrono and mesquite.

Undergrowth, cacti, catclaw and palo christo.

40.00 S.89°56'E., on a random line, bet. secs. 10 and 15.

Set temp. 1/4 sec. cor.

80.14 Fall 19 lks. South of the corner of secs. 10, 11, 14 and 15.

Thence,

S.89°55'W., on a true line, bet. secs. 10 and 15.

Survey of the Subdivision Lines of T. 8 N., R. 3 W.

Chains Over mountainous land, thru scattering timber and undergrowth.

Asc. 206 ft. over E. slope.

9.10 Spur, 206 ft. over E. slope.  
Over level top of same.

12.00 Leave top from SW.  
Desc. 18 ft. over NW. slope.

13.80 Wash, near head, course NE.  
Asc. 119 ft. over SE. slope.

19.10 Ridge, brs. NW-SE.  
Desc. 198 ft. over SW. slope.

20.90 Head of wash, course SW.  
Asc. 26 ft. over SE. slope.

33.30 Branch spur, brs. S. 80° W. Over level top of same.

37.80 Leave spur, brs. S. Desc. 47 ft. over NW. slope.

38.20 Mine shaft brs. North 100 lks. dist.

40.07 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (x) at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 10 and 15, with brass cap marked

1/4      S 10  
          S 15  
          1930

No bearing trees available.

40.80 Desc. 12 ft. over NW. slope.  
Head of wash, course NW.  
Asc. 31 ft. over NE. slope.

44.20 Spur, brs. N.  
Desc. 38 ft. over NW. slope.

46.90 Wash, near head, course N.  
Asc. 33 ft. over E. slope.

49.15 Rocky spur, brs. N.  
Desc. 145 ft. over W. slope.

60.00 Spur, brs. West.  
Desc. 216 ft. down same.

70.15 Wash, 20 lks. wide, course N.  
Asc. 64 ft. over West slope.

74.60 Spur, brs. NW.  
Desc. 98 ft. over SW. slope to

80.14 Intersect the corner of secs. 9, 10, 15 and 16.  
Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, palo verde, mesquite and madrono.  
Undergrowth, cacti, catclaw and palo christo.

-----

N. 0° 02' W., on true line, bet. secs. 9 and 10.  
Over mountainous land, thru scattering timber and undergrowth.

Desc. 42 ft. over N. slope.

3.80 Wash, 50 lks. wide, course West.  
Asc. 78 ft. over South slope.

12.00 Spur, brs. SW. Desc. 87 ft. over NW. slope.

16.40 Wash, 10 lks. wide, course SW.  
Asc. 143 ft. over SE. slope.

20.30 Old road, brs. NE-SW.

22.40 Road, brs. NE-SW.

24.30 Spur, brs. SW.  
Desc. 45 ft. over NW. slope.

28.10 Head of wash, course SW.  
Asc. 45 ft. over SW. slope.

31.50 Short spur, brs. West

## Survey of the Subdivision Lines of T. 8 N., R. 3 W.

- Chains Desc. 20 ft. over NW. slope.  
 38.70 Shallow wash, course SW.  
 Asc. 38 ft. over SE. slope to  
 40.00 Set an iron post 3 ft. long; 1 in. in diam.; 20 ins. in the ground to bedrock, deposit a track spike at base of post, raise a mound of stone about post, for the  $\frac{1}{4}$  sec. cor. of secs. 9 and 10, with brass cap marked
- $\frac{1}{4}$   
 S 9 | S 10  
 1930
- From which:  
 U. S. L. M. No. 1477 brs. S.  $1^{\circ} 22'$  W.  
 U. S. B. M. 3187 in T. 8 N., R. 4 W., brs. S.  $78^{\circ} 50'$  W.  
 Thayers Mine, brs. N.  $82^{\circ} 40'$  W.  
 Asc. 77 ft. over SE. slope,  
 43.60 Rocky spur, brs. SW., from which point:  
   house (a) brs. N.  $87^{\circ}$  W.  
   " (b) " N.  $83\frac{1}{2}^{\circ}$  W.  
   " (c) " N.  $78^{\circ} 10'$  W.  
   " (d) " N.  $57^{\circ}$  W.  
 Old goat ranch (Ora Hanns) brs. S.  $57\frac{1}{2}^{\circ}$  W.  
 Hoist of Thayers mine, brs. S.  $79^{\circ} 50'$  W.
- Desc. 101 ft. over NE. slope.  
 58.25 Spur, brs. NE.  
 Desc. 183 ft. over NW. slope.  
 59.45 Intersect the SW. side line (4-5) of the "Sampson" patented lode mining claim, Mineral Survey No. 1536, at 80 lks. N.  $45\frac{1}{2}^{\circ}$  W., of cor. No. 5 thereof.  
 across patented mineral land.  
 63.80 Head of wash, course NE. Asc. 17 ft. over SE. slope.  
 68.00 Spur, brs. NE. Desc. 136 ft. over NW. slope.  
 71.64 Intersect NE. side line (1-2) of "Sampson" pat. lode claim at 2.26 chs. S.  $47^{\circ} 09'$  E., from Cor. No. 2 thereof. Leave patented mineral land.  
 76.26 Intersect the SE. side line (1-2) of the "Mountain Chief", patented lode mining claim, Mineral Survey No. 1536, at 9.46 chs. S.  $35^{\circ} 48'$  W., of cor. No. 1 thereof.  
 Across patented mineral land.  
 76.35 Spur, brs. NE. Desc. 80 ft. over NW. slope to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, deposit a track spike at base of post, raise a mound of stone about post, for the cor. of secs. 3, 4, 9 and 10, with brass cap marked

T 8 N R 3 W  
 S 4 | S 3  
 S 9 | S 10  
 1930

No bearing trees available.

Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, mesquite and palo verde.  
 Undergrowth, cacti, catclaw and palo christo.

Survey of the Subdivision Lines of T. 8 N., R. 3 W.

Chains

N. 89° 55' E., on a random line, bet. secs. 3 and 10.  
 40.00 Set temp. 1/4 sec. cor.  
 80.12 Intersect the cor. of secs. 2, 3, 10 and 11.  
 Thence,  
 S. 89° 55' W., on a true line, bet. secs. 3 and 10.  
 Over mountainous land, thru scattering timber and under-  
 growth.  
 Asc. 128 ft. over East slope.  
 3.10 Road, brs. NE-SW, about 2 chs. N. of forks with road to  
 Walkers goat ranch in sec. 11.  
 11.50 Ridge, brs. NE. Desc. 24 ft. over NW slope.  
 14.90 Wash, 10 lks. wide, course NE.  
 Asc. 24 ft. over SE slope.  
 17.50 Spur, brs. N. Continue ascent of 216 ft. over NE slope.  
 24.40 Ridge, brs. NW-SE. Morgans Butte brs. S. about 15 chs.  
 distant. Desc. 508 ft. over SW slope, to wash.  
 36.91 Intersect the NE side line (1-4) of the "Black Diamond"  
 patented lode mining claim, Mineral Survey No. 4024,  
 at 8.30 chs. S. 45° 31' E., of Cor. No. 4 thereof.  
 Across patented mineral land.  
 40.06 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in  
 the ground to bedrock, deposit a stone marked with  
 a cross (+) at base of post, raise a mound of stone  
 about post, for the 1/4 sec. cor. of secs. 3 and 10,  
 with brass cap marked

$$\frac{1}{4} \begin{matrix} S 3 \\ S 10 \end{matrix}$$

1930

No bearing trees available.

42.95 Wash, 10 lks. wide, course NW. Asc. 55 ft. over NE slope.  
 45.40 Desc. 111 ft. over NE slope.  
 51.65 Spur, brs. NW.  
 Desc. 129 ft. over SW slope.  
 58.60 Center of Slim Jim Wash, 150 lks. wide, course NW.  
 Asc. 66 ft. over East slope.  
 65.80 Knoll on spur, which brs. N.  
 Desc. 63 ft. over NW slope.  
 69.05 Wash, 10 lks. wide, course NE.  
 Asc. 155 ft. over SE slope.  
 74.17 Intersect the SW side line (1-4) of the "Jenny Lyn" pat.  
 lode mining claim, Mineral Survey No. 4024, at 2.27  
 chs. N. 21° 51' W., of Cor. No. 4 thereof.

Leave patented mineral land.  
 76.50 Spur, brs. NE.  
 Desc. 34 ft. over NW slope.  
 77.42 Intersect the SE side line (1-2) of the "Mountain Chief"  
 patented lode mining claim, Mineral Survey No. 1536,  
 at 4.86 chs. S. 35° 48' W., of Cor. No. 1 thereof.  
 Across patented mineral land.  
 80.12 The cor. of secs. 3, 4, 9 and 10.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde, ironwood and mesquite.  
 Undergrowth, cacti, catclaw and palo christo.

## Survey of the Subdivision Lines of T. 8 N., R. 3 W.

Chains


- N.0°02'W., on true line, bet. secs. 3 and 4.  
Over mountainous land, thru scattering timber & undergrowth. Across "Mountain Chief" pat. lode claim, M.S. No. 1536.  
Desc. 106 ft. over NW slope to wash.  
5.05 Wash, 10 lks. wide, course NE; asc. 45 ft. over SE slope.  
7.99 Intersect the NE end line (1-4) of the "Mountain Chief" patented lode mining claim, Min. Sur. No. 1536, at 2.19 chs. S.54°E. of Cor. No. 4. Leave patented mineral land.  
8.00 Spur, brs. NE. Desc. 126 ft. over NW slope.  
8.45 Old road, brs. NE-SW.  
14.35 Head of wash, course NW.  
Asc. 67 ft. over SW slope.  
15.06 Intersect the SW side line (1-4) of the "Jenny Lyn" pat. lode mining claim, Min. Sur. No. 4024, at 4.23 chs. S.21°51'W. of Cor. No. 1 thereof.  
Across patented mineral land.  
17.20 Same old road, brs. NW-SE.  
20.18 Intersect the NW end line (1-2) of the "Jenny Lyn" patented lode mining claim, Mineral Survey No. 4024 at 1.80 chs. S.51°23'W. of Cor. No. 2 thereof.  
Leave pat. mineral land.  
20.30 Same spur, brs. NW. Desc. 198 ft. over NE slope.  
22.98 Intersect the SW side line, (1-4) of the "S & J" patented lode mining claim, Min. Sur. No. 4024, at 11.03 chs. S.45°12'E. of Cor. No. 1 thereof.  
Across patented mineral land.  
27.60 Telephone line, brs. NE-SW.  
35.11 Intersect the NW end line, (1-2) of the "S & J" patented lode mining claim, Mineral Survey No. 4024, at 32 lks. S.60°54'W. of Cor. No. 2 thereof.  
Leave patented mineral land.  
40.00 Set an iron post 3 ft. long, 1 in. in diam., 24 ins. in the ground to bedrock, deposit a track spike at base of post, raise a mound of stone about post, for the  $\frac{1}{4}$  sec. cor. of secs. 3 and 4, with brass cap marked
- $\frac{1}{4}$   
 S4 | S3
- 1930 from which.  
Morgans Butte, brs. S.50 $\frac{1}{2}$ °E.  
Mahoney Peak, in T9N R3W brs. N.17°53'W.  
No bearing trees available.  
Desc. 77 ft. over NE slope.  
42.65 Enter Slim Jim Wash, course NW. Over sandy bottom.  
47.00 Leave wash, asc. 36 ft. over rolling S. slope.  
51.30 Telephone line, brs. NW-SE.  
55.40 Spur, brs. W. Desc. 51 ft. over N. slope.  
56.70 Wash, near head, course West.  
Asc. 51 ft. over S. slope.  
59.00 Spur, brs. West.  
Desc. 14 ft. over N. slope.  
60.90 Wash, 5 lks. wide, course SW.  
Asc. 103 ft. over SE slope.  
66.60 Spur, brs. W. wide, course SW.  
Desc. 45 ft. over N. slope to

Survey of the Subdivision Lines of T.8 N., R.3 W.

Chains

70.00 Branch spur, brs. NW. Desc. 132 ft. over NE slope.  
 73.30 Wash, near head, course NW. Asc. 35 ft. over SW slope.  
 74.60 Intersect the 2nd. Std. Par. N. at 2.65 chs. East, of the  
 Std. Cor. of secs. 33 and 34, described in book "A"  
 of this group.

At point of intersection set an iron post 3 ft. long,  
 2 ins. in diam., 20 ins. in the ground to bedrock,  
 deposit a stone marked with a cross (+) at base of  
 post, raise a mound of stone about post, for the clos-  
 ing cor. of secs. 3 and 4, with brass cap marked



No bearing trees available.


Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and palochristo.

From the cor. of secs. 4, 5, 32 and 33, on the S.Bdy. of  
 Tp., hereinbefore described.

N.0°02'W., on true line, bet. secs. 32 and 33.

Over mountainous land, thru scattering timber & under-  
 growth. Asc. 73 ft. over SE slope.

6.40 Ridge, brs. S.80°E.-S.80°W. desc. 60 ft. over NW slope.  
 8.05 Ravine, near head, course NE. Asc. 32 ft. over SE slope.  
 13.70 Spur, brs. NE. Desc. 139 ft. over NW slope.  
 18.20 Ravine, 10 lks. wide, course NW., (at junction of washes  
 from NE-SE.) Asc. 48 ft. over SW slope.  
 19.50 Spur, brs. NW. Desc. 45 ft. over NW slope.  
 20.55 Wash, 20 lks. wide, course SW. Asc. 112 ft. over SE slope.  
 26.95 Small knoll on spur, brs. SW. Desc. 54 ft. over NW slope.  
 27.50 Head of wash, course SW. Asc. 45 ft. over SW slope.  
 31.85 Same spur, brs. SE. Desc. 15 ft. over NE slope.  
 38.60 Wash, 10 lks. wide, course SE. Asc. 18 ft. over SW slope.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in  
 the ground to bedrock, raise a mound of stone about  
 post, for the 1/4 sec. cor. of secs. 32 & 33, with  
 brass cap marked



1930

from which,

a paloverde, 4 ins. in diam., brs. S.78°E., 19 lks.  
 dist., marked BT only

a paloverde, 4 ins. in diam., brs. N.23°W., 47 lks.  
 dist., marked BT only.

Asc. 54 ft. over SW slope.

42.15 Spur, brs. SE. Desc. 48 ft. over NE slope.  
 48.90 Wash, 5 lks. wide, course SE. Asc. 91 ft. over SW slope.  
 56.00 Spur, brs. SE. Asc. 159 ft. over SE slope.  
 58.00 Ridge, brs. N. and SW. Asc. 23 ft. over top.  
 65.00 Leave ridge, brs. NW. Desc. 6 ft. over NE slope.  
 67.10 Head of wash, course SE. Asc. 40 ft. over SW slope.

Survey of the Subdivision Lines of T.8 N., R.3 W.

Chains

71.70 Ridge, from NE, brs. NW and S. 30°W.  
 Desc. 105 ft. over NW slope.  
 78.90 Wash, 5 lks. wide, course W. Asc. 25 ft. over S. slope.  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (+) at base of post, raise a mound of stone about post, for the cor. of secs. 28, 29, 32 and 33, with brass cap marked

T8N	R3W
S29	S28
S32	S33

1930 from which,  
 a catclaw, 4 ins. in diam., brs. N.16°E., 44 lks. dist., marked BT only.  
 a mesquite, 12 ins. in diam., brs. S.16½°W., 237 lks. dist., marked T8N R3W S32 BT  
 No other bearing trees available.

Land, mountainous. Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite. Undergrowth, cacti, catclaw and palochristo.

40.00 East, on a random line, bet. secs. 28 and 33.  
 80.02 Set temp. ¼ sec. cor.  
 Intersect the cor. of secs. 27, 28, 33 and 34.  
 Thence, West, on true line, bet. secs. 28 and 33.  
 Over mountainous land, thru scattering timber & undergrowth.  
 Desc. gradual SW slope.  
 .60 Head of wash, course S. Asc. 19 ft. over SE slope.  
 1.40 Spur, brs. S. Desc. 21 ft., over W. slope.  
 3.00 Wash, near head, course S. Asc. 13 ft. over NE slope.  
 5.80 Spur, brs. SE. Desc. 23 ft. over SW slope.  
 9.65 Wash, 10 lks. wide, course SE. Asc. 58 ft. over NE slope.  
 12.30 Spur, brs. SE. Asc. 34 ft. over S. slope.  
 17.10 Wash, 20 lks. wide, course SE. Asc. 139 ft. over NE slope.  
 20.10 Spur, brs. SE. Asc. 34 ft. over S. slope.  
 32.02 Spur, brs. S. Desc. 48 ft. over SW slope.  
 35.95 Wash, 10 lks. wide, course SE. Asc. 75 ft. over NE slope to ridge.  
 37.20 Trail, brs. N-S.  
 39.00 Ridge, brs. NW-SE. Desc. gradual SW slope to  
 40.01 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, deposit dead horse foreleg bone at base of post, raise a mound of stone about post, for the ¼ sec. cor. of secs. 28 and 33, with brass cap marked

1	S 28
4	S 33

1930 from which,  
 Vulture peak, brs. S.56½°W.  
 White Picacho peak, brs. S.64°10'E.  
 Highest peak in White Tank Mts. brs. S.0°13'W.  
 Red Picacho peak, brs. S.54°53'E.  
 Peak at North end of Harquahala Mts., brs. S.76°38'W.  
 Saddle Back Mtn., brs. S.17°17'W.,  
 Eagle Tail Pk., brs. S.45°48'W.,

Desc. 57 ft. over SW slope.  
 46.00 Wash, near head, course S. Asc. 46 ft. over E. slope.  
 48.80 Spur, brs. S. Desc. 17 ft. over NW slope.  
 53.10 Wash, near head, course SW. Asc. 24 ft. over SE slope.  
 54.70 Spur, brs. SW. Desc. gradual NW slope.  
 56.30 Head of wash, course S. Asc. gradual SE slope.  
 57.40 Spur, brs. SW. Desc. 87 ft. over NW slope.



Survey of the Subdivision Lines of T.8 N., R.3 W.


Chains

- 61.55 Head of wash, course SW. Asc. 49 ft. over SE slope.
- 65.70 Spur, brs. SW. Desc. 69 ft. over NW slope.
- 70.75 Wash, 10 lks. wide, course SW. Asc. 23 ft. over SE slope.
- 75.00 Ridge, brs. NE and SW. Desc. gradual NW slope.
- 76.10 Head of wash, course SW. Asc. gradual SE slope to
- 80.02 The cor. of secs. 28, 29, 32 and 33.

Land, mountainous; soil, rocky 4th. rate.; timber, palo-verde and mesquite; undergrowth, cacti, catclaw and palochristo.

N.0°02'W., on a true line, bet. secs. 28 and 29. Over mountainous land, thru scattering timber & undergrowth.

- Asc. 25 ft. over S. slope.
- 1.25 Spur, brs. W. Desc. 35 ft. over N. slope.
- 4.00 Ravine, 5 lks. wide, course W. Asc. gradual S. slope.
- 6.25 Spur, brs. W. Desc. 19 ft. over N. slope.
- 8.00 Wash, at head, course W. Asc. 32 ft. over S. slope.
- 10.20 Spur, brs. W. Desc. 26 ft. over N. slope.
- 11.80 Head of wash, course SW. Asc. 26 ft. over SW slope.
- 16.40 Spur, brs. SW. Desc. 17 ft. over NW slope.
- 17.70 Wash, 10 lks. wide, course SW. Asc. 131 ft. over SW slope on W. edge of wash, course S.
- 28.30 Ridge, brs. N.80°E.-S.80°W. Trail, on top brs. N.80°E.-S.80°W. Desc. gradual NW slope.
- 31.65 Head of wash, course SW. Asc. 23 ft. over SW slope.
- 34.00 Spur, brs. W. Desc. 46 ft. over rolling NW slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit a 10d. nail at base of post, raise a mound of stone about post, for the 1/4 sec. cor. secs. 28 and 29, with brass cap marked



1930

No bearing trees available.

Highest part of Rich Hill, in T.10 N., R.4 W., brs. N.32°24'W.

USLM No. 1477 brs. N.26°02'E.

Desc. slight NW slope.

- 41.00 Spur, brs. SW. Desc. 145 ft. over rolling NE slope.
- 50.30 Wash, 20 lks. wide, course NW. Asc. 74 ft. over SW slope.
- 61.60 Spur, brs. NW. Desc. 121 ft. over NE slope.
- 66.20 Enter Blue Tank Wash, across sandy bottom, course SW for 3 chs. thence NW.
- 68.00 Old road, at N. edge of wash, brs. NE-SW. Leave bottom asc. 45 ft. over SE slope.
- 72.10 Spur, brs. SW. Desc. 14 ft. over NW slope.
- 75.60 Wash, 5 lks. wide, course SW. Asc. 55 ft. over SE slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (+) at base of post, raise a mound of stone about post, for the cor. of secs. 20, 21, 28 and 29, with brass cap marked



1930

from which,

## Survey of the Subdivision Lines of T. 8 N., R. 4 W.

## Chains

a mesquite, 5 ins. in diam., brs. N.41°W., 74 lks. dist., marked T8N R3W S20 BT  
 a mesquite, 4 ins. in diam., brs. S.80½°E., 71 lks. dist.; marked BT only.

Land, mountainous. Soil, rocky. 4th. rate. Timber, paloverde and mesquite. Undergrowth, cacti, catclaw and palochristo.

East, on a random line, bet. secs. 21 and 28.  
 40.00 Set temp. ¼ sec. cor.  
 79.86 Fall 9 lks. S. of the cor. of secs. 21, 22, 27 & 28. Thence, S.89°56'W., on true line, bet. secs. 21 & 28. Over mountainous land, thru scattering timber & undergrowth.  
 6.80 Asc. gradual NE slope.  
 12.25 Spur, brs. N. Desc. 29 ft. over W. slope.  
 14.33 Ravine, 5 lks. wide, course NE. Asc. gradual SE slope.  
 22.80 Spur, brs. NE. Desc. 133 ft. over NE slope.  
 23.80 Blue Tank Wash, 50 lks. wide, course SW. Asc. 26 ft. over SE slope.  
 25.00 Spur, brs. N. Desc. 26 ft. over NW slope.  
 26.00 Blue Tank Wash, 50 lks. wide, course SW. Asc. 26 ft. over SE slope.  
 28.95 Old road, brs. NE-SW.  
 29.20 Spur, brs. S. Desc. 54 ft. over SW slope.  
 30.40 Old road, brs. NW-SE.  
 37.60 Blue Tank Wash, 50 lks. wide, course NW. Asc. 62 ft. over NE slope.  
 39.93 Spur, brs. N. Desc. 62 ft. over NW slope to Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, raise a mound of stone about post, for the ¼ sec. cor. of secs. 21 and 28, with brass cap marked

1 S 21  
 1 S 28

1930 from which,  
 a mesquite, 12 ins. in diam., brs. N.58°W., 124 lks. dist., marked ¼ S21 BT  
 a mesquite, 10 ins. in diam., brs. S.87°W., 324 lks. dist., marked ¼ S28 BT.  
 From the NW bearing tree a good spring of water, brs. N.48°E., 500 lks. dist.  
 45.60 Continue along level land, on S. edge of Blue Tank Wash. Leave bottom; asc. 212 ft. over NE slope.  
 51.60 Spur, brs. NW. Desc. 199 ft. over NW slope.  
 61.00 Blue Tank Wash, 20 lks. wide, course N. Over bottom land, gradually ascending.  
 62.90 Old road, brs. N-S.  
 65.50 Leave bottom; asc. 71 ft. over E. slope.  
 68.40 Spur, brs. SW. Desc. 53 ft. over NW slope.  
 72.60 Wash. 10 lks. wide, course SW. Asc. 35 ft. over NE slope  
 75.00 Spur, brs. S. Desc. 35 ft. over W. slope.  
 77.70 Wash. 5 lks. wide, course S. Asc. 30 ft. over E. slope.  
 79.86 The cor. of secs. 20, 21, 28 and 29.


Land, mountainous; soil, rocky 4th. rate; timber, paloverde and mesquite; undergrowth, cacti, catclaw, and palochristo.

Survey of the Subdivision Lines of T.8 N., R.3 W.

Chains

N.0°02'W., on true line, bet. secs. 20 and 21.  
Over mountainous land, thru scattering timber & undergrowth.


- 2.56 Desc. 20 ft. over NE slope.
- 10.55 Wash, 5 lks. wide, course SE Asc. 141 ft. over SW slope.
- 11.85 Spur, brs. SE. Desc. along E. edge of top. 16 ft.
- 17.50 Leave spur, from NE. Desc. 86 ft. over NW slope.
- 19.00 Trail, brs. E-W.
- 22.30 Head of wash, course W. Asc. 60 ft. over S. slope.
- 29.00 Spur, brs. W. Desc. 65 ft. over NW slope.
- 40.00 Wash, 10 lks. wide, course SW. Asc. 74 ft. over SE slope.
- Set an iron post 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, deposit a stone marked with a cross (+) at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 20 & 21, with brass cap marked.



1930 from which,

a mesquite, 14 ins. in diam., brs. S.7°W., 161 lks. dist., marked 1/4 S20 BT  
 No other tree available.  
 Ora Hanns house, brs. S.88°W.,  
 Denver Hill (USLM No.1477) brs. N.44°07'E.  
 Vulcan peak, brs. S.16°20'W.

- Asc. 38 ft. over SE slope.
- 42.94 Spur, brs. SW. Desc. 85 ft. over N. slope.
- 46.72 Trail, brs. NE-SW.
- 47.70 Head of wash, course W. Asc. 38 ft. over S. slope.
- 51.35 Spur, brs. W. Desc. 45 ft. over NE slope.
- 53.13 Intersect the SW side line (3-4) of the "Meter Hill" pat. lode mining claim, Min. Sur. No.2418, at 8.90 chs. N.33°33'W., of Cor. No.4 thereof. Across pat. mineral land.
- 58.51 Branch spur, brs. NE. Desc. 126 ft. over NW slope.
- 64.29 Enter Hamlin Wash, course W. Over rocky bottom.
- 66.65 Road brs. E-W.
- 66.95 Leave wash, Asc. 30 ft. over SE slope.
- 69.11 Spur, brs. SW. Desc. 28 ft. over NW slope.
- 69.60 Intersect the NE side line, (1-2) of the "Meter Hill" claim at 63 lks. S.33°33'E., of Cor. No.2 thereof. Leave patented mineral land.
- 71.77 Wash, 30 lks. wide, course SW. Asc. 26 ft. over SE slope.
- 74.20 Intersect the SW side line (3-4) of the "Batholdi" pat. lode mining claim, Min. Sur.No.2418 at 2.70 chs. N.46°22'W. of Cor. No.4. Across pat. mineral land.
- 77.20 Head of wash, course SW. Asc. 34 ft. over SE slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, deposit a horseshoe at base of post, raise a mound of stone about post, for the cor. of secs. 16, 17, 20 and 21, with brass cap marked



1930 from which,

a catclaw, 4 ins. in diam., brs. N.47 1/2°E., 28 lks. dist., marked BT  
 A house, brs. S.81°W.  
 A shaft brs. S.71°10'W.  
 A shaft, brs. S.46°20'W.  
 Highest peak in the Harquahala Mts. brs. N.86 1/2°W.

## Survey of the Subdivision Lines of T.8 N., R.3 W.

## Chains

Land, mountainous; soil, rocky 4th. rate; timber, palo-verde and mesquite; undergrowth, cacti, catclaw and palechristo.

	N. 89° 56' E., on a random line, bet. secs. 16 and 21.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.80	Fall 4 lks. S. of the cor. of secs. 15, 16, 21 and 22. Thence, S. 89° 54' W., on true line, bet. secs. 16 & 21. Over mountainous land, thru scattering timber & undergrowth.
	Desc. 30 ft. over W. slope.
3.20	Spur, turns to SW. Desc. 108 ft. over NW slope.
4.95	Intersect the NE end line (1-4) of the "Cycle" pat. lode mining claim, Min. Sur. No. 2649, at 2.80 chs. S. 56° E. of Cor. No. 1. Across patented mineral land.
8.00	Wash, 1 ch. N. of line, course SW.
10.00	Intersect the NW side line of the "Cycle" pat. lode mining claim, at 3.13 chs. S. 60° W. of Cor. No. 1 thereof. Leave patented mineral land.
12.63	Intersect the SE side line of the "Ramona" pat. lode mining claim, Min. Sur. No. 2649, at 2.40 chs. N. 54° E., of Cor. No. 3 thereof. Across pat. mineral land.
14.50	Spur, brs. NW. Desc. 38 ft. over NW slope.
16.80	Wash, 10 lks. wide, course SW. Asc. gradual NE slope.
20.00	Spur, brs. NW. Trail on same. Desc. 35 ft. over SW slope.
21.80	Trail, same as above noted, brs. NE-SW.
23.30	Wash, 10 lks. wide, course S. Asc. 13 ft. over gradual E. slope.
25.50	Rocky spur, brs. S. Desc. 72 ft. over W. slope.
28.95	Wash, 5 lks. wide, course S. Asc. gradual E. slope.
30.40	Spur, brs. S. Desc. 14 ft. over W. slope.
32.00	Wash, 5 lks. wide, course S. Asc. 14 ft. over E. slope.
33.30	Intersect the West side line (1-2) of the "Baita" pat. lode mining claim, Min. Sur. No. 2649, at 1.88 chs. S. 4° 20' W., of Cor. No. 2 thereof. Leave patented mineral land.
35.40	Spur, brs. S. Desc. 33 ft. over W. slope.
35.95	Old road, brs. N. and S.
38.80	Head of wash, course S. Asc. over gradual SE slope to
39.90	Set an iron post 5 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit two track spikes at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 16 and 21, with brass cap marked
	$\frac{1}{4} \frac{S 16}{S 21}$
	1930
	No bearing trees available.
	Asc. 38 ft. over SE slope.
42.90	Spur, brs. SW. Desc. 64 ft. over NW slope.
46.40	Head of wash, course SW. Asc. 30 ft. over SE slope.
54.90	Trail, brs. NW-SE.
56.40	Spur, brs. SW. Desc. 56 ft. over NW slope.
59.60	Wash, 10 lks. wide, course SW. Asc. 10 ft. over gradual SE slope.
60.89	Intersect the East side line of the "Accident" pat. lode mining claim, Min. Sur. No. 2418, at 38 lks. N. 5° 37' E., of Cor. No. 1 thereof. Across patented mineral land.
61.40	Spur, brs. SW. Desc. 65 ft. over NW slope.
67.00	Wash, 10 lks. wide, course SW. Asc. 48 ft. over NE slope.

Survey of the Subdivision Lines of T. 8 N., R. 3 W.

Chains

65.89 Intersect the NW end line (2-3) of the "Montai Hill" pat. lode Mining claim, (Min. Sur. No. 2418) at 5.02 chs. N. 52° 40' E., of Cor. No. 3 thereof. Leave patented Mineral Land.

68.40 Spur, brs. SE. Desc. 18 ft. over SW slope.

70.30 Wash, 5 lks. wide, course SE. Asc. 93 ft. over NE slope.

72.85 Intersect the NE side line of the "Batholdi" pat. lode claim, M.S. No. 2418 at 3.08 chs. N. 47° 08' W., of Cor. No. 1 thereof. Across patented mineral land.

76.80 Spur, brs. S. Desc. 68 ft. over W. slope.

79.80 The cor. of secs. 16, 17, 20 and 21.

Land, mountainous. Soil, rocky 4th. rate. Timber, paloverde and mesquite. Undergrowth, cacti, catclaw and palo-christo.

N. 0° 02' W., on true line, bet. secs. 16 and 17.

Over mountainous land, thru scattering timber & undergrowth. Across patented mineral land.

3.30 Desc. 51 ft. over NW slope (2-2) of the "Batholdi" pat. lode claim, M.S. No. 2418 at 10 lks. wide, course SW. Head 1 ch. E. chs. Asc. 416 ft. over SE slope thereof.

6.47 Intersect the NE side line (1-4) of the "Batholdi" pat. lode mining claim (Min. Sur. No. 2418) at 12.61 chs. N. 47° 08' W. of Cor. No. 1 thereof. Leave patented mineral land.

9.15 Spur, brs. SW. Desc. 14 ft. over NW slope.

15.60 Wash, course SW., near head. Asc. 116 ft. over SE slope.

18.55 Spur, brs. SW. Desc. 23 ft. over NW slope.

20.50 Head of wash, course SW. Asc. 40 ft. over SW slope.

23.25 Ridge, brs. NW-SE. Desc. 120 ft. over NW slope.

29.60 Spur, brs. N. Desc. 103 ft. over NW slope.

33.10 Wash, 5 lks. wide, course NE. Asc. 23 ft. over SE slope.

38.70 Spur, brs. NE. Desc. 25 ft. over NW slope.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, deposit a track spike at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 16 and 17, with brass cap marked

S17 | S16

1930

from which,

A house, brs. N. 53° E., about 10 chs. distant.

A Goat shed, brs. N. 67° E., about 30 chs. distant.

No bearing trees available.

Desc. 98 ft. over NW slope.

44.80 Wash, 5 lks. wide, course NE. Asc. 52 ft. over SE slope.

46.00 Spur, brs. NE. Desc. 54 ft. over NW slope.

52.50 Wash, 30 lks. wide, course NW. Asc. 31 ft. over SW slope.

54.50 Old road, brs. E-W., on spur, which brs. W.

Desc. 29 ft. over N. slope.

56.50 Road, brs. E-W.

58.15 Wash, 10 lks. wide, course West.

Asc. gradual S. slope.

58.60 Spur, brs. West. Trail, on same brs. E-W. Desc. 23 ft. over N. slope.

60.80 Wash, 10 lks. wide, course West. Desc. 23 ft. over S. slope.

63.50 Spur, brs. West. Desc. 17 ft. over N. slope.

65.20 Wash, 10 lks. wide, course W. Asc. 34 ft. over S. slope.

69.75 Spur, brs. W. Desc. 61 ft. over N. slope.

74.75 Wash, 50 lks. wide, course W. Asc. 27 ft. over SE slope.

## Survey of the Subdivision Lines of T.8 N., R.3 W.

Chains

80.00

Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, raise a mound of stone about post, for the cor. of secs. 8, 9, 16 and 17, with brass cap marked

T8N	R3W
S8	S9
S17	S16

1930

from which,

a mesquite, 5 ins. in diam., brs. N.15°E., 44 lks. dist., marked T8N R3W S9 BT  
 a mesquite, 6 ins. in diam., brs. S.74½°W., 24 lks. dist., marked T8N R3W S17 BT  
 a mesquite, 5 ins. in diam., brs. S.86½°E., 146 lks. dist., marked T8N R3W S16 BT  
 Chisel a 4 ins. cross (+) on boulder 4 x 3 x 6 ft. also chisel BO S8, which brs. NW 5 lks. dist.

Land, mountainous; soil, rocky 4th. rate, timber, mesquite, paloverde and madrone.  
 Undergrowth, cacti, catclaw and palochristo.

40.00  
79.72

N.89°54'E., on a random line, bet. secs. 9 and 16.  
 Set temp. ¼ sec. cor.  
 Fall 9 lks. S. of the cor. of secs. 9, 10, 15 and 16.  
 Thence, S.89°50'W., on a true line, bet. secs. 9 and 16.  
 Over mountainous land, thru scattering timber & undergrowth.

4.70  
6.80  
13.20  
14.50  
15.70  
17.72

Desc. 26 ft. over W. slope.  
 Wash, 10 lks. wide, course N. Asc. 50 ft. over E. slope.  
 Spur, brs. N. Desc. 9 ft. over W. slope.  
 Wash, 5 lks. wide, course N. Asc. 9 ft. over W. slope.  
 Spur, brs. N. Desc. 12 ft. over W. slope.  
 Wash, 5 lks. wide, course N. Asc. 138 ft. over NE slope.  
 Intersect the NE side line, (2-3) of the "Burro" patented mining claim, Min. Sur. No. 1477, at 5.55 chs. S.47°15'E. of Cor. No.2 thereof. Across patented mineral land.

25.70  
36.70  
39.86

Spur, brs. NW. Desc. 112 ft. over SW slope.  
 Wash, 10 lks. wide, course NW. Asc. 77 ft. over NE slope.  
 On spur, bearing NW; set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit a 3 in. track spike at base of post, raise a mound of stone about post, for the ¼ sec. cor. of secs. 9 and 16, with brass cap marked

¼	S 9
	S 16

1930

48.65  
50.70  
50.84

Desc. 151 ft. over SW slope.  
 Wash, 10 lks. wide, course NW. Asc. 9 ft. over NE slope.  
 Spur, brs. NW. Desc. 16 ft. over SW slope.  
 Intersect the NW end line (2-3) of the "Denver No.4" pat. lode mining claim, Min. Sur. No. 1477, at 4.50 chs. S.49°45'W., of Cor. No.2 thereof. Leave patented mineral land.

53.10  
56.90  
58.70  
62.79

Wash, 10 lks. wide, course S. (same as above noted.)  
 Asc. 16 ft. over E. slope.  
 Spur, brs. S. Desc. 55 ft. over SW slope.  
 Wash, 10 lks. wide, course S. Asc. 59 ft. over SE slope.  
 Intersect the SE end line (3-4) of the "San Francisco" patented lode mining claim, Min. Sur. No.2973, at

Survey of the Subdivision Lines of T.8 N., R.3 W. BOOK 3894

Chains	
	3.75 chs. S.38°W. of Cor. No.3 thereof.
	Across patented mineral land.
64.80	Spur, brs. N <sup>W</sup> and to NW and SW. Desc. 155 ft. over NW slope.
70.80	Intersect the SW side line, (3-4) of the "San Francisco" patented lode claim, at 6.35 chs. N.47°13'W., of Cor. No:3 thereof. Leave patented mineral land.
73.20	Enter wash, at bend from NE to West. Down same.
76.00	Leave wash, course N. Asc. gradual NE slope.
77.80	Spur, brs. NW. Desc. 21 ft. over SW slope.
79.40	Wash, 30 lks. wide, course SW. Asc. gradual SE slope to
79.72	The cor. of secs: 8, 9, 16 and 17.
	Land, mountainous.
	Soil, rocky 4th. rate.
	Timber, mesquite, paloverde, and cottonwood.
	Undergrowth, cacti, catclaw and palochristo:
	-----
	N.0°02'W., on true line, bet. secs. 8 and 9.
	Over mountainous land, thru scattering timber & undergrowth.
	Asc. 69 ft. over S. slope.
2.28	Telephone line, brs. NE-SW.
6.80	Wash, 5 lks. wide, course SE. Asc. 57 ft. over SW slope.
8.26	Intersect the SW side line (1-4) of the "San Francisco" patented lode mining claim, Min. Sur. No.2973, at 4.18 chs. S.47°13'E. of Cor. No.1 thereof.
	Across patented mineral land.
9.80	Road, brs. NE-SW.
11.05	Old road, brs., NE-SW.
12.20	Spur, brs. SE. Desc. 17 ft. over NE slope.
13.70	Old mine dump on line.
15.30	Wash, 5 lks. wide, course SE. Asc. 34 ft. over SW slope.
19.90	Intersect the NE side line (2-3) of the "Golden State" pat. lode mining claim, Min. Sur. No.2973 at 3.00 chs. N.59°15'W. of Cor. No.3 thereof. Leave pat. mineral land.
20.40	Spur, brs. SE. Asc. 195 ft. over SE slope.
26.60	Spur, brs. SE. Desc. 12 ft. over gradual NE slope.
29.30	Head of wash, course SE. Asc. 40 ft. over gradual SW slope.
32.00	Intersect the SE end line (1-2) of the "Dennis" pat. lode mining claim, Min. Sur. No.1957, at 1.95 chs. N.51°35'E. of Cor. No.2 thereof. Across patented mineral land.
34.20	Ridge, brs. NE-SW. Asc. 57 ft. over SW slope to
40.00	Set an iron post 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, deposit a small track spike at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 8. and 9, with brass cap marked
	1/4
	S8   S9
	1930 from which,
	Ora Hanns house, brs. S.68 1/2°E.
	Sayers P.O. brs. S.79°10'W.
	A house, brs. S.69°12'W. about 1/2 mi. dist.
	Asc. 150 ft. over SW slope.
48.83	Divide brs. N.80°W.-N.80°E. Desc. 212 ft. over steep N. slope.
54.30	Wash, near head, course NW. Asc. 32 ft. over SW slope.

Survey of the Subdivision Lines of T.8 N., R.3 W.

Chains

58.17 Intersect the NE side line of the "St. Louis" patented lode mining claim, Min. Sur. No. 1957, at 18.90 chs. S. 38° 25' E. of Cor. No. 3 thereof. Leave patented mineral land.

58.80 Rocky spur, brs. NW. Desc. 292 ft. over NE slope.

63.48 Wash, 10 lks. wide, course NW. Asc. 53 ft. over SW slope.

66.40 Spur, brs. NW. Desc. 65 ft. over NE slope.

68.00 Trail, brs. E. and W.

69.55 Intersect the SE end line (1-4) of the "Yellow Jacket" patented lode mining claim, Min. Sur. No. 1957, at 1.90 chs. S. 51° 35' W. of Cor. No. 4 thereof. Across patented mineral land.

70.80 Wash, at the NW side course NW. Asc. 221 ft. over SW slope.

72.61 Intersect the NE side line (3-4) of the "Yellow Jacket" patented lode mining claim, Min. Sur. No. 1957, at 2.40 chs. N. 38° 25' W. of Cor. No. 4. Leave patented mineral land.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 22 ins. in the ground to bedrock, deposit a small track spike at base of post, raise a mound of stone about post, for the cor. of secs. 4, 5, 8 and 9, with brass cap marked

T8N	R3W
S5	S4
S8	S9

1930

No bearing trees available.

Land, mountainous; soil, rocky 4th. rate; timber, palo-verde, mesquite and ironwood.  
Undergrowth, cacti, catclaw and palo christo.

40.00 N. 89° 50' E., on a random line, bet. secs. 4 and 9. Set temp. 1/4 sec. cor.

79.72 Fall 23 lks. N. of the cor. of secs. 3, 4, 9 and 10. Thence, west, on a true line, bet. secs. 4 and 9. Over mountainous land, thru scattering timber & undergrowth. Across patented mineral land. Asc. 40 ft. over NW slope.

3.65 Wash, 10 lks. wide, course NE. Asc. 120 ft. over SE slope.

8.70 Old road, brs. NE-SW.

9.70 Spur, brs. NE. Desc. 36 ft. over NW slope.

14.30 Wash, 5 lks. wide, course NE. Asc. 195 ft. over SE slope.

22.80 Spur, brs. NE. Asc. gradually over N. slope.

28.85 Telephone line, brs. NE-SW.

32.30 Old road, brs. NW-SE.

33.74 Intersect the SW side line (3-4) of the "Harvard" pat. lode mining claim, M.S. No. 4026, at 1.04 chs. N. 69° 10' W. of Cor. No. 3 thereof. Leave patented mineral land.

34.08 Intersect the E. sideline, (1-4) of the "Canton" pat. lode mining claim, at 14.82 chs. S. 15° 09' E. of Cor. No. 1 thereof. (M.S. No. 4039). Across pat. mineral land.

34.70 Divide, brs. NW-SE. Desc. 85 ft. over SW slope.

39.86 Set an iron post 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, deposit a track spike at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 4 and 9, with brass cap marked

1/4	S 4
	S 9

1930 from which,



Survey of the Subdivision Lines of T.8 N., R.3 W.

Chains


U.S.B.M. 4370 brs. S.17°10'E.  
Thayers Mine shaft, brs. S.7½°W.  
" " house, brs. S.34°W.  
No bearing trees available.

- 46.85 Telephone line, brs. NW-SE.
- 47.15 Trail, from Thayers Mine to Constellation, brs. NW-SE.
- 47.80 Head of wash, course SE. A saddle brs. N. 2 chs. dist. Asc. 172 ft. over SE slope.
- 52.50 Divide, brs. NE-SW. Desc. 191 ft. over NW slope.
- 54.00 Intersect the NW end line (1-4) of the "Prescott" pat. lode mining claim (Mineral Survey No. 4059), at 1.40 chs. S.76°11'W. of Cor. No.1 thereof. Leave patented mineral land.
- 65.75 ~~Wash, near head, course NW. Asc. 57 ft. over NE slope.~~
- 74.00 Ridge, brs. NE-SE. Desc. 120 ft. over SW slope.
- 79.72 The cor. of secs. 4, 5, 8 and 9.

Land, mountainous; soil, rocky 4th.; timber, mesquite, paloverde and madromo; undergrowth, catti, catclaw and palechrists.

N.0°02'W., on true line, bet. secs. 4 and 5.  
Over mountainous land, thru scattering timber & undergrowth.

- Asc. 75 ft. over SW slope.
- 9.50 Ridge, brs. NW-SE. Desc. 312 ft. over NE slope.
- 14.90 Wash, 10 lks. wide, course NW. Asc. 54 ft. over SW slope.
- 18.25 Spur, brs. NW. Desc. 109 ft. over NE slope.
- 23.00 Wash, near head, course NW. Asc. 30 ft. over SW slope.
- 26.30 Spur, brs. NW. Desc. 49 ft. over NE slope.
- 30.80 Head of wash, course West. Asc. 9 ft. over S. slope.
- 34.60 Spur, brs. NW. Desc. 112 ft. over NE slope.
- 40.00 Set an iron post 3 ft. long; 1 in. in diam., 22 ins. in the ground to bedrock, deposit a small track spike at base of post, raise a mound of stone about post, for the ¼ sec. cor. of secs. 4 and 5, with brass cap marked



Rich Hill, brs. N.44¼°W.  
NE cor. of house brs. S.55¼°E.  
NW cor. of another house brs. N.75¼°E.  
Shaft of hoist of the Copper Belt Mine, brs. N.48°40'W.  
Conical Peak, brs. N.29°40'E.  
W. cor. of the Supts. house of the Monte Cristo Mine, brs. N.7½°E.

- Desc. 51 ft. over NE slope.
- 41.50 Telephone line, brs. E-W.
- 41.80 Wash, 5 lks. wide, course W. Asc. 59 ft. over SW slope.
- 47.60 Ridge, brs. NW-SE. Thence across level land.
- 47.80 Road, brs. NW-SE.
- 48.40 Power line, brs. E-W.
- 59.82 Hoist of the Copper Belt Mine, brs. N.31°W.
- 50.00 Leave spur, desc. 74 ft. over NE slope.
- 65.90 Head of wash, course NE. Asc. 27 ft. over SE slope.
- 68.30 Same spur, brs. N. Desc. 181 ft. over N. slope to


Survey of the Subdivision Lines of T.8 N., R.3 W.

Chains

74.48

Intersect the 2nd. Std. Par. N., at 2.65 chs. East of the Std. Ver. of secs. 32 & 33, described in book "A" of this Group.

At intersection set an iron post 3 ft. long, 2 ins. in diam., 22 ins. in the ground to bedrock, deposit a small track spike at base of post, raise a mound of stone about post, for the closing cor. of secs. 4 & 5, with brass cap marked



1930 from which, a mesquite, 8 ins. in diam., brs. S.43°W., 105 lks. dist., marked T8N R3W S5 CC BT. No other trees available.

Black Rock Mill, brs. N.45½°W., about 20 chs. dist. Conical Peak, brs. N.43°E. about 1 mile dist. High Peak in the Yarnell Mts. brs. N.50°W.

Land, mountainous. Soil, rocky 4th. rate. Timber, palo verde, mesquite and ironwood. Undergrowth, caecilia, catclaw and palochristo.

From the cor. of secs. 5, 6, 31 and 32, on the S. Bdy. of Tp., hereinbefore described. N.0°05'W., on true line, bet. secs. 31 and 32. Over mountainous land, thru scattering timber & undergrowth.

1.90  
8.65  
12.35  
14.37  
17.65  
24.45  
25.65  
26.26  
31.65  
32.15  
33.65  
35.60  
39.00  
40.00  
40.30  
41.30

Desc. gradual NE slope. Wash, 5 lks. wide, course SE. Asc. 30 ft. over SW slope. Spur, brs. SE. Desc. 21 ft. over NE slope. Wash, 5 lks. wide, course SE. Asc. gradual SW slope. Spur, brs. SE. Desc. gradual NE slope. Enter wash, at mouth of wash from W. Across rocky bottom. Leave wash, course SE. Asc. 32 ft. over SE slope. Spur, brs. SW. Desc. gradual NW slope. House, brs. S.29°E. (at old Monarch Mine.) Enter wash, asc. gradually along E. side of same. Leave bottom; from NE and NW; asc. gradual S. slope. Old road, brs. NE-SW. Spur, brs. SW. Desc. gradual NW slope. Wash, 10 lks. wide, course SW. Asc. gradually up same. True point for the ¼ sec. cor. falls in wash bottom where it is impracticable to monument same, establish witness cor. as hereinafter described. Leave wash bottom from NW; asc. gradual SE slope to Spur, brs. SW. Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, raise a mound of stone about post, for witness cor. to ¼ sec. cor. of secs. 31 and 32, with brass cap marked



1930 from which, a mesquite, 10 ins. in diam., brs. S.53°E., 30 lks. dist., marked ¼ S32 BT. a mesquite, 12 ins. in diam., brs. S.69°W., 139 lks. dist., marked ¼ S31 BT

Survey of the Subdivision Lines of T. 8 N., R. 3 W.

- Chains Desc. gradual NW. slope:
- 43.80 Wash, 10 lks. wide, course SW. Asc. rolling SW. slope 61 ft.
- 47.70 Spur, brs. W. Desc. 46 ft. over NW. slope.
- 49.10 Head of wash, course SW. Asc. 46 ft. over SE. slope.
- 52.65 Spur, brs. SW. Desc. 13 ft. over NW. slope.
- 54.60 Wash, course SW, near head. Asc. 13 ft. over SE. slope.
- 57.65 Ridge, brs. SE. and W. Desc. 50 ft. over NW. slope.
- 62.40 Wash, 10 lks. wide, course W.
- 62.60 Road, from Wickenburg, Ariz., to the Monarch Mine. Asc. gradual S. slope.
- 63.10 Spur, brs. West. Desc. gradual N. slope.
- 63.40 Enter wash, course West; over rocky bottom of same.
- 68.00 Leave wash, at junction of roads from N. 30° E. - N. 30 W. Asc. 98 ft. over SE. slope.
- 77.70 Spur, brs. SW. Desc. 21 ft. over NW. slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, raise a mound of stone about post, for the cor. of secs. 29, 30, 31 and 32, with brass cap marked

T 8 N R 3 W  
 S 30 | S 29  
 S 31 | S 32  
 1930

From which:

- A palo verde, 5 ins. in diam., brs. S. 72½° W., 218 lks. dist., marked T 8 N R 3 W S 31 B T.
- A palo verde, 4 ins. in diam., brs. N. 65° W., 22 lks. dist., marked B T only.
- A palo verde, 4 ins. in diam., brs. S. 8° E., 202 lks. dist., marked B T only
- Chisel an 8 in. cross in SW. face of outcropping ledge exposed 4x2x2 ft., and B.O. S29 which brs. N. 60½° E., 17 lks. distant.
- Vulture Peak, brs. S. 53° 20' W.
- Highest Peak in Harquahala Mts., brs. S. 73° 25' W.
- Shaft of the Tinddale Mine (Diamond Joe) brs. N. 56° W.

Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, palo verde and mesquite.  
 Undergrowth, cacti, catclaw and palo christo.

-----  
 East, on a random line, bet. secs. 29 and 32.

- 40.00 Set temp. ¼ sec. cor.
- 79.86 Fall 4 lks. S. of the cor. of secs. 28, 29, 32 and 33. Thence, S. 89° 58' W., on true line, bet. secs. 29 & 32. Over mountainous land, thru scattering timber & undergrowth. Desc. 54 ft. over gradual SW. slope.
- 4.40 Track to mine tunnel, about 50 lks. S., brs. NE-SW.
- 5.40 Wash, 10 lks. wide, course NW. Asc. 34 ft. over NE. slope
- 9.50 Spur, brs. NW. Desc. 40 ft. over SW. slope.
- 13.05 Wash, 20 lks. wide, course SW. Asc. 7 ft. over SE. slope
- 15.40 Spur, brs. SW. Desc. 44 ft. over NW. slope.
- 17.05 Wash, 20 lks. wide, course SW. Asc. gradual SE. slope.
- 24.55 Spur, brs. S. Desc. 15 ft. over SW. slope.
- 26.45 Wash, 5 lks. wide, course SE. Asc. 44 ft. over NE. slope.
- 33.30 Spur, brs. SE. Desc. 61 ft. over SW. slope.
- 35.50 Wash, 10 lks. wide, course SE., near head. Asc. 40 ft. over NE. slope.
- 38.50 Spur, brs. SE., from ridge about 2 chs. N. Desc. 28 ft. over SW. slope.
- 39.93 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit a small track spike at base of post, raise a mound of stone about post, for the ¼ sec. cor. of secs. 29 and 32, with brass cap marked

¼ S 29  
 S 32  
 1930

From which:

## Survey of the Subdivision Lines of T. 8 N., R. 3 W.


Chains	Rich Hill, in T. 10 N., R. 4 W., brs. N. 27° 28' W. U.S.L.M. 1477, brs. N. 58° 49' E. Red Picacho Peak in T. 7 N., R. 2 W., brs. S. 57° 45' E. No bearing trees available. Desc. 75 ft. over SW. slope.
45.16	Head of wash, course S. Asc. 25 ft. over SE. slope.
48.75	Top of ridge, brs. NE. and SW. Desc. 75 ft. over NW. slope.
55.30	Descend gradually over N. slope.
60.30	Top of same ridge, brs. SE. and W. Desc. slightly along top of ridge.
63.90	Leave top of ridge, bearing E. & SW. Desc. 140 ft. over NW. slope.
67.76	Powder house of Great Southern Mine, on line.
71.73	Wash, 20 lks. wide, course SW. Road brs. NE-SW. Asc. 50 ft. over SE. slope.
72.42	SW. cor. of a house belonging to Great Southern Mine.
77.64	Spur, brs. SW. Desc. 40 ft. over NW. slope.
79.86	The cor. of secs. 29, 30, 31 and 32 at head of wash, course SW. Land, mountainous. Soil, rocky, 4th rate. Timber, palo verde and mesquite. Undergrowth, cacti, catclaw and palo christo.
40.00	West, on a random line, bet. secs. 30 and 31. Set temp. $\frac{1}{4}$ sec. cor.
55.56	Fall 2 lks. S. of the cor. of secs. 30 and 31 on W. Bdy. of Tp., hereinbefore described. Thence, S. 89° 59' E., on true line, bet. secs. 30 & 31. Over mountainous land, thru scattering timber & under- growth. Desc. 12 ft. over E. slope.
0.60	Wash, 5 lks. wide, course SW. Asc. 10 ft. over W. slope.
0.80	Old road, brs. NE-SW. Desc. gradual SE. slope.
4.10	Wash, 100 lks. wide, course SW. Asc. 106 ft. over NW. slope.
10.90	Ridge, brs. NE-SW. Desc. 40 ft. over SE. slope.
15.56	(40.00 chs. in departure from cor. of secs. 29, 30, 31 and 32). Set an iron post 3 ft. long, 1 in. in diam. 12 ins. in the ground to bedrock, deposit 2 20d. nails at base of post, raise a mound of stone about post, for the $\frac{1}{4}$ sec. cor. of secs. 30 and 31, with brass cap marked
	$\frac{1}{4}$ $\frac{S\ 30}{S\ 31}$ 1930
	From which: A palo verde, 5 ins. in diam., brs. N. 87° W., 58 lks. dist., marked $\frac{1}{4}$ S 30 B T. A palo verde, 4 ins. in diam., brs. S. 51° E., 93 lks. dist., marked $\frac{1}{4}$ S 31 B T. Desc. 10 ft. over SE. slope.
18.55	Wash, 10 lks. wide, course SW. Asc. 69 ft. over NW. slope.
23.80	Spur, brs. SW. Desc. 43 ft. over SE. slope.
26.00	Wash, 5 lks. wide, course SW. Asc. 59 ft. over NW. slope.
30.20	Spur, brs. SW. Desc. 52 ft. over SE. slope.
32.60	Wash, near head, course SW. Asc. 53 ft. over NW. slope.
35.15	Spur, brs. SW. Desc. 64 ft. over SE. slope.
39.90	Wash, near head, course S. Asc. 49 ft. over W. slope.
43.06	Spur, brs. S. Desc. 40 ft. over E. slope.
47.00	Wash, 5 lks. wide, course S. Asc. gradual SW. slope.
48.00	Spur, brs. S. Road, brs. N-S., to Tindale Mine, 5 chs. N. Desc. gradual E. slope.
49.30	Road, brs. N-S.
51.00	Center of wash, 50 lks. wide, course S. Asc. 52 ft. over SW. slope.
55.56	The cor. of secs. 29, 30, 31 and 32. Land, mountainous. Soil, rocky, 4th rate. Timber, palo verde and mesquite. Undergrowth, cacti, catclaw and palo christo.

Survey of the Subdivision Lines of T.8 N., R.3 W.

Chains  
 N.0°03'W., on true line, bet. secs. 29 and 30.  
 Over mountainous land, thru scattering timber & under-  
 growth. Asc. 57 ft. over S. slope.  
 2.25 Spur, brs. W. From which, a house brs. N.38°W., about  
 7 chs. dist.; a house brs. N.30°W., about 8 chs. dist.  
 Desc. 57 ft. over NE slope.  
 6.15 Wash, 40 lks. wide, course SW. Asc. 91 ft. over SE slope.  
 13.60 Spur, brs. SW. Desc. 59 ft. over NW slope.  
 23.40 Wash, 20 lks. wide, course SW. Asc. gradual SE slope.  
 23.60 Point of spur, from NW. Desc. gradual NE slope.  
 24.30 Wash, 20 lks. wide, course SE.  
 25.30 End of spur, brs. W. Desc. 6 ft. over NW slope.  
 25.80 Same wash, course SW. Asc. 40 ft. over SE slope.  
 29.25 Spur, brs. SW. Desc. 14 ft. over NW slope.  
 35.60 Wash, 10 lks. wide, course SW. Asc. 37 ft. over SE slope to  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground for the 1/4 sec. cor. of secs. 29 and 30,  
 with brass cap marked



1930 from which,  
 a paloverde, 5 ins. in diam., brs. N.62 1/2°E., 74 lks.  
 dist., marked 1/4 S29 BT  
 a paloverde, 5 ins. in diam., brs. N.17°W., 163 lks.  
 dist., marked 1/4 S30 BT  
 Vulture Peak, brs. S.15°40'W.,  
 Asc. 48 ft. over SE slope.  
 42.90 Spur, brs. West. Desc. 51 ft. over NW slope.  
 47.05 Wash, 10 lks. wide, course W. Asc. 103 ft. over S. slope.  
 53.50 Spur, brs. W. Desc. 25 ft. over N. slope.  
 61.00 Spur, brs. W. Desc. 35 ft. over N. slope.  
 61.60 Wash, 5 lks. wide, course W. Asc. 114 ft. over S. slope.  
 67.55 Ridge, from S.80°E.-N.80°W. Desc. 70 ft. over NE slope.  
 75.60 Wash, 10 lks. wide, course NW. Asc. gradual SW slope.  
 79.15 Spur, brs. NW. Desc. 27 ft. over N. slope.  
 79.80 Wash, 10 lks. wide, course NE. Asc. gradual SE slope to  
 79.90 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in  
 the ground to bedrock, deposit a stone marked with a  
 cross (+) at base of post, raise a mound of stone  
 about post, for the witness cor. to cor. of secs.  
 19, 20, 29 and 30, with brass cap marked



1930

No bearing trees available.  
 80.00 True point for the cor. of secs. 19, 20, 29 and 30 falls  
 on precipitous slope of ledge, where it is imprac-  
 ticable to monument the cor., establish witness cor.  
 10 lks. S.0°03'E., as hereinbefore described.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and palochristo.

40.00 N.89°58'E., on a random line, bet. secs. 20 and 29.  
 Set temp. 1/4 sec. cor.  
 80.00 Intersect the cor. of secs. 20, 21, 28 and 29.  
 Thence, S.89°58'W., on true line, bet. secs. 20 & 29.  
 Over mountainous land, thru scattering timber & under-  
 growth.

Survey of the Subdivision Lines of T.8 N., R.3 W.

Chains

Asc. 55 ft. over E. slope.  
 2.90 Spur, brs. S. Desc. 112 ft. over W. slope.  
 9.65 Wash, 5 lks. wide, course SW. Asc. 9 ft. over SE slope.  
 11.90 Spur, brs. S. Desc. 31 ft. over W. slope.  
 14.35 Head of wash, course SW. Asc. gradual SE slope.  
 16.85 Spur, brs. S. Desc. 16 ft. over W. slope.  
 19.05 Wash, same as above noted, course SW. Asc. gradual SE slope.  
 20.00 Desc. 16 ft. over SW slope.  
 21.20 Enter Blue Tank Wash, course NW; across bottom land.  
 23.10 Channel of wash, course NW. road, brs. NW-SE.  
 24.20 Leave wash, asc. gradual E. slope.  
 24.90 Old road, brs. NW-SE.  
 25.65 Spur, brs. N. Desc. 9 ft. over NW slope.  
 26.60 Mouth of wash, from SW. enters Blue Tank Wash here.  
 Asc. 88 ft. over SE slope.  
 32.50 Spur, brs. NE. Desc. 16 ft. over NW slope.  
 36.20 Head of wash, course NE. Asc. 56 ft. over NE slope.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 16 ins. in  
 the ground to bedrock, deposit a file at base of post,  
 raise a mound of stone about post, for the 1/4 sec. cor.  
 secs. 20 and 29, with brass cap marked

1/4 S 20  
 S 29

1930

No trees available.  
 From cor. the USLM 1477 brs. N.44 1/2° E.  
 Black Rock Butte (W. rock of three) brs. N.29° 12' E.

Asc. 120 ft. over E. slope.  
 46.00 Butte, on spur, brs. NW-SE.  
 Desc. 198 ft. over SW slope to wash.  
 49.38 Trail, brs. NW-SE.  
 54.75 Wash, 10 lks. wide, course NW. Asc. 24 ft. over NE slope.  
 62.00 Spur, brs. NW. (for .2 chs. then turns to SW).  
 Desc. 78 ft. over S. slope.  
 76.00 Same spur, brs. SW. Desc. 109 ft. over NW slope.  
 78.50 Spur, brs. SW. Desc. 16 ft. over NW slope.  
 79.30 Wash, 5 lks. wide, course NW. Asc. 12 ft. over E. slope.  
 80.00 Intersect the true point for the cor. of secs. 19, 20,  
 29 and 30.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and palo christo.

-----  
 From true point for cor. of secs. 19, 20, 29 and 30,  
 N. 89° 59' W., on a random line, bet. secs. 19 & 30.

40.00 Set temp. 1/4 sec. cor.  
 55.45 Fall 9 lks. S. of the cor. of secs. 19 & 30, on the W.  
 Bdy. of Tp., hereinbefore described.  
 Thence, S. 89° 53' E., on true line, bet. secs. 19 and 30.  
 Over mountainous land, thru scattering timber & under-  
 growth.  
 Asc. 119 ft. over SW slope.  
 5.45 Ridge, brs. N.15° E.-S.15° W. Asc. 23 ft. over N. slope.  
 15.45 (40.00 chs. in departure from cor. of secs. 19, 20, 29  
 and 30) set an iron post 3 ft. long, 1 in. in diam.,  
 12 ins. in the ground to bedrock, deposit a horse-  
 shoe at base of post, raise a mound of stone about  
 post, for the 1/4 sec. cor. of secs. 19 & 30, with  
 brass cap marked

1/4 S 19  
 S 30

1930

No bearing trees available.


Survey of the Subdivision Lines of T.8 N., R.3 W. **BOOK** 3894

Chains

From corner, Rich Hill, brs. N.28°28'W.  
 USLM 1477 brs. N.58°49'E.  
 Red Picacho peak, in T.7 N., R.2 W., brs. S.57½°E.  
 Desc. 41 ft. over N. slope.  
 16.00 Spur, brs. NE. Desc. 41 ft. over SE slope.  
 20.75 Wash, 5 lks. wide, course NE. Asc. 19 ft. over NW slope.  
 22.10 Spur, brs. NE. Desc. 58 ft. over E. slope.  
 26.80 Wash, 10 lks. wide, course N. Asc. 51 ft. over W. slope.  
 35.00 Spur, in saddle, brs. N-S. Desc. 18 ft. over E. slope.  
 38.90 Wash, at head, course N. Asc. 18 ft. over W. slope.  
 43.75 Spur, brs. NW. Desc. 14 ft. over E. slope.  
 47.60 Wash, 5 lks. wide, course N. Asc. 27 ft. over W. slope.  
 50.50 Spur, brs. N. Desc. 14 ft. over NE slope to  
 55.45 The true point for cor. of secs. 19, 20, 29 and 30.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and palochristo.

-----  
 From true point for cor. of secs. 19, 20, 29 and 30,  
 N.0°03'W., on true line, bet. secs. 19 and 20.  
 Over mountainous land, thru scattering timber & under-  
 growth. Desc. 8 ft. over N. slope.  
 .90 Wash, 20 lks. wide, course NW. Asc. 8 ft. over S. slope.  
 2.70 Spur, brs. SW. Desc. gradual N. slope.  
 3.00 Wash, 5 lks. wide, course NW. Asc. 34 ft. over S. slope.  
 7.65 Spur, brs. W. Desc. 43 ft. over N. slope.  
 11.10 Wash, 10 lks. wide, course NW. Asc. gradual SE slope.  
 13.65 Spur, brs. SW. Desc. 16 ft. over N. slope.  
 15.45 Wash, 5 lks. wide, course SW. Asc. 16 ft. over SE slope.  
 23.50 Spur, brs. SW. Head of wash, course W. about 1 ch. W.  
 Asc. 122 ft. over SW slope.  
 25.00 Ridge, brs. NW-SE. Desc. 142 ft. over NE slope to  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 16 ins. in  
 the ground to bedrock, raise a mound of stone about  
 post, for the ¼ sec. cor. of secs. 19 and 20, with  
 brass cap marked



1930 from which,  
 acattowood, 112 ins. in diam., brs. N.S. 32½°E. 12167 lks.  
 dist., marked ¼ S20 BT  
 Chisna BO S19 + on boulder 4 x 6 x 6 ft. cross brs.  
 S.8¼°W. 22 lks. dist.  
 Black Rock (West one of three) brs. N.32½°E.  
 No other tree available.  
 Desc. 78 ft. over E. slope.  
 48.40 Wash, 10 lks. wide, course NW. Asc. 68 ft. over SW slope.  
 51.95 Rocky spur, brs NW. Desc. 117 ft. over NE slope.  
 56.40 Enter Blue Tank Wash, course SW. Over sandy bottom;  
 water seeps out about 5 chs. above line.  
 58.90 Leave wash, course SW. Asc. 170 ft. over SE slope.  
 65.40 Spur, brs. SW. Desc. 7 ft. over N. slope.  
 70.40 Wash, near head, course SW. Asc. 138 ft. over SE slope.  
 76.25 Spur, brs. W. Desc. 65 ft. over N. slope.  
 79.50 Head of wash, course W. Asc. gradual S. slope to  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in  
 the ground to bedrock, deposit a horseshoe at base of  
 post, raise a mound of stone about post, for the cor.  
 of secs. 17, 18, 19 and 20, with brass cap marked

Survey of the Subdivision Lines of T.8 N., R.3 W.

Chains

T8N	R3W
S18	S17
S19	S20

1930 from which,  
 a paloverde, 6 ins. in diam., brs., S. 73½° E., 80 lks. dist., marked T8N R3W S20 BT  
 a paloverde, 4 ins. in diam., brs. N. 64½° W., 104 lks. dist., marked T8N R3W S19 BT  
 No other bearing trees available.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite, few cottonwood.  
 Undergrowth, cacti, catclaw and palochristo.

40.00 N. 89° 58' E., on a random line, bet. secs. 17 and 20.  
 79.90 Set temp. ¼ sec. cor.  
 Fall 5 lks. S. of the cor. of secs. 15, 17, 20 and 21.  
 Thence, S. 89° 56' W., on true line, bet. secs. 17 & 20.  
 Over mountainous land, thru scattering timber & undergrowth. Across patented mineral land.  
 Desc. 49 ft. over W. slope.  
 1.95 Wash, 10 lks. wide, course S. Asc. 19 ft. over E. slope.  
 4.30 Spur, brs. S. Desc. 18 ft. over W. slope.  
 5.60 Wash, 5 lks. wide, course S. Asc. 18 ft. over E. slope.  
 9.25 Spur, brs. S. Desc. 121 ft. along S. slope.  
 14.20 "B" mine house, brs. S. 3 chs. dist.  
 15.34 Intersect the SW side line of the "Nogi" pat. lode mining claim (Mineral Survey No. 2418) at 5.28 chs. S. 26½° E. of Cor. No. 3 thereof. Leave patented mineral land.  
 18.15 Enter wash, course NW. Across sandy bottom.  
 19.95 Road, brs. NW-SE.  
 23.00 Leave wash, course NW. Asc. 89 ft. over SE slope.  
 30.70 Spur, brs. NE. Desc. 33 ft. over NW slope.  
 35.75 Wash, near head, course NE. Asc. 33 ft. over SE slope.  
 38.45 Spur, brs. NE. Trail, on same. Desc. gradual NW slope.  
 39.95 Set an iron post 3 ft. long, 1 in. in diam., 22 ins. in the ground to bedrock, deposit a track spike at base of post, raise a mound of stone about post, for the ¼ sec. cor. of secs. 17 and 20, with brass cap marked

¼ S 17  
 S 20

1930 from which,  
 a mesquite, 12 ins. in diam., brs. N. 71° W., 145 lks. dist., marked ¼ S17 BT  
 USLM 1477 brs. N. 71½° E.  
 No other bearing tree available.


Desc. 35 ft. over NW slope.  
 41.45 Wash, 10 lks. wide, course NE. Asc. 99 ft. over SW slope.  
 45.70 Spur, brs. N. Desc. 88 ft. over SW slope.  
 48.55 Head of wash, course NW. Asc. 121 ft. over NE slope.  
 68.95 Ridge, brs. N: 85° W. - S: 70° E. Over level top.  
 72.95 Spur, brs. SW. Desc. 173 ft. over SW slope.  
 79.90 The cor. of secs. 17; 18, 19 and 20.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde, madrono and mesquite; undergrowth,  
 Cacti, catclaw and palochristo.



Survey of the Subdivision Lines of T.8 N., R.3 W. **BOOK** 3894


Chains  
 40.00 N. 89° 53' W., on a random line, bet. secs. 18 and 19.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 55.36 Fall 22 lks. N. of cor. of secs. 18 and 19, on the W. bdy. of T.,  
 hereinbefore described.  
 Thence, N. 89° 53' E., on true line, bet. secs. 18 & 19.  
 Over mountainous land, thru scattering timber & under-  
 growth. Asc. 39 ft. over NW slope.  
 0.30 Spur, brs. SW. Desc. 37 ft. over SE slope.  
 2.15 Wash, 20 lks. wide, course SW. Asc. 300 ft. over SW slope.  
 15.36 (40.00 chs. in departure from the cor. of secs. 17, 18,  
 19 and 20) set an iron post 3 ft. long, 1 in. in diam.,  
 15 ins. in the ground to bedrock, deposit a stone mar-  
 ked with a cross (+) at base of post, raise a mound  
 of stone about post, for the  $\frac{1}{4}$  sec. cor. of secs.  
 18 and 19, with brass cap marked



1930 from which,  
 USBM 3187 in T.8 N., R.4 W., brs. S. 89° 30' W.  
 Vulture Peak, brs. S. 45 $\frac{1}{2}$ ° W.,  
 A house, in sec. 24, 18N R4W brs. S. 89° 57' W.  
 Asc. 32 ft. over SW slope.  
 20.70 Spur, brs. SW. Desc. 23 ft. over SE slope.  
 25.65 Thence, along S. slope.  
 30.65 Spur, brs. S. Desc. 82 ft. over SE slope.  
 34.55 Wash, 10 lks. wide, course S. Asc. 8 ft. over W. slope.  
 35.55 Spur, brs. SW. Desc. gradual E. slope.  
 37.15 Wash, 10 lks. wide, course S. Asc. 24 ft. over W. slope.  
 40.55 Spur, brs. SW. Desc. over gradual SE slope.  
 44.65 Wash, 5 lks. wide, course SW. Asc. 135 ft. over SW slope.  
 51.35 Spur, brs. NW. Desc. 20 ft. over slight NE slope.  
 54.30 Wash, 5 lks. wide, course N. 80° W. Asc. 25 ft. over SW slope.  
 55.36 The cor. of secs. 17, 18, 19 and 20.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde and mesquite.  
 Undergrowth, cacti, catclaw and palo christo.

N. 0° 05' W., on true line, bet. secs. 17 and 18.  
 Over mountainous land, thru scattering timber & undergrowth.  
 Asc. 84 ft. over S. slope.  
 5.35 Ridge, brs. S. 70° E. and W. Desc. 171 ft. over N. slope.  
 12.00 Wash, 10 lks. wide, course W. Asc. 80 ft. over S. slope.  
 18.60 Spur, brs. SW. Desc. 18 ft. over NW slope.  
 20.80 Head of wash, course SW. Asc. 23 ft. over SW slope.  
 23.45 Ridge, brs. NW-SE. Desc. 287 ft. over NE slope.  
 25.70 From which, King Solomon Mine brs. N. 75° E., about 60 chs.  
 distant.  
 A house, brs. N. 57° 20' E., 30 chs. dist.  
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in  
 the ground to bedrock, raise a mound of stone about  
 post, for the  $\frac{1}{4}$  sec. cor. of secs. 17 & 18, with  
 brass cap marked



1930 from which,  
 a mesquite, 8 ins. in diam., brs. N. 27° 45' E., 303 lks.  
 dist. marked  $\frac{1}{4}$  S17 BT  
 a catclaw, 4 ins. in diam., brs. N. 1° W., 120 lks. dist.,  
 marked  $\frac{1}{4}$  S18 BT

Survey of the Subdivision Lines of T.8 N., R.3 W.

Chains

43.00 Desc. gradual NE slope.  
 Hamblin Wash, 1 ch. wide, course west, asc. 303 ft. over S. slope.  
 63.25 Spur, brs. W. Desc. 248 ft. over N. slope.  
 73.70 Road, brs. E-W.  
 74.20 Wash, 10 lks. wide, course W. Asc. 128 ft. over S. slope.  
 74.70 Telephone line, brs. E.-W.  
 79.00 Spur, brs. W. Desc. 20 ft. over N. slope.  
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, deposit a small track spike at base of post, raise a mound of stone about post, for the cor. of secs. 7, 8, 17 and 18, with brass cap marked.

T8N	R3W
S7	S8
S18	S17

1930 from which,  
 Chisel a cross (+) on face of boulder 4 x 3 x 5 ft., which brs. S.42°45'W., 50 lks. distant. Also cut "BOS18" alongside cross.  
 No bearing trees available.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde, mesquite and ironwood.  
 Undergrowth, cacti, catclaw and palochristo.

40.00 N. 89°56'E., on a random line, bet. secs. 8 and 17.  
 80.02 Set temp. 1/4 sec. cor.  
 Fall 5 lks. N. of the cor. of secs. 8, 9, 16 and 17. Thence, S. 89°58'W., on true line, bet. secs. 8 and 17. Over mountainous land, thru scattering timber & undergrowth. Desc. 8 ft. over SW slope.  
 .30 Small wash, course SE. Asc. 130 ft. over NE slope.  
 2.70 Telephone line, brs. NE and SW.  
 4.60 Road, brs. N.-S.  
 6.90 Spur, brs. S. for 1 ch. thence, SE.  
 Desc. 93 ft. over W. slope.  
 -7.06 Intersect the E. side line (2-3) of the "Gilbert House" pat. lode mining claim, Min. Sur. No. 2973, at 18 chs. N. 10°11'E. of Cor. No. 3 thereof. Across pat. mineral land.  
 9.52 Old road, brs. N.-S.  
 13.50 Wash, near head, course SW. Asc. 47 ft. over SE slope.  
 16.20 Intersect the W. side line of the "Gilbert House" claim, at 6.13 chs. S. 10°11'W. of Cor. No. 1 thereof. Leave patented mineral land.  
 21.50 Spur, brs. SW. Desc. 92 ft. over NW slope.  
 21.50 Wash, 5 lks. wide, course SW. Asc. 12 ft. over slight SE slope.  
 23.60 Spur, brs. SW. Desc. 23 ft. over gradual SE slope.  
 24.70 Wash, 5 lks. wide, course SW. Asc. 23 ft. over gradual SE slope.  
 27.60 Intersect the NE side line (1-4) of the "Bullion" pat. lode mining claim, Mineral Survey No. 2973, at 12.84 chs. N. 50°16'W., of Cor. No. 4 thereof. Across patented mineral land.  
 28.60 Spur, brs. SW. Desc. 75 ft. over NW slope.  
 35.50 Enter wash, course N. Over sandy bottom.  
 36.35 Intersect the NW end line (1-4) of the "Bullion" pat. lode claim, at 6.42 chs. S. 10°11'W. of Cor. No. 1 thereof. Leave patented mineral land.  
 38.35 Leave wash; asc. 27 ft. over E. slope to

Survey of the Subdivision Lines of T. 8 N., R. 3 W.

Chains

40.01 Set an iron post 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, deposit a small track spike at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 8 and 17, with brass cap mkd.

$$\frac{1}{4} \begin{array}{r} S 8 \\ \hline S 17 \end{array}$$

1930

No bearing trees available.

43.00 Asc. 65 ft. over E. slope. Thence, over level land.

48:00 Spur, brs. NE. Desc. gradual NW slope.

52.10 Wash, near head, course NE. Asc. 219 ft. over rolling SE slope.

63.15 Spur, brs. NE. Asc. gradual E. slope.

66.10 Spur, brs. NW. Desc. 93 ft. over N. slope.

80.02 The cor. of secs. 7; 8, 17 and 18.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, Paloverde and mesquite.  
 Undergrowth, cacti, catclaw, palochristo and oakbrush.

40.00 S. 89° 53' W., on a random line, bet. secs. 7 and 18. Set temp. 1/4 sec. cor.

55.30 Fall 2 lks. N. of the cor. of secs. 7 and 18 on W. Bdy. of Tp., hereinbefore described. Thence, N. 89° 52' E., on true line; bet. secs. 7 & 18. Desc. 25 ft. over slight E. slope.

11.00 Road, brs. NE-SW. Forks of road, brs. S. 3 chs.

15.30 (40:00 chs. in departure from Cor. of secs. 7, 8, 17 & 18) Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (+) at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 7 & 18, with brass cap marked

$$\frac{1}{4} \begin{array}{r} S 7 \\ \hline S 18 \end{array}$$

1930

from which,

Rick Hill, brs. N. 32° 45' W.  
 A large mound of stone on Knoll about 1 mi. dist., brs. S. 3° 22' W.

17.55 Spur, brs. NW. Desc. 16 ft. over SE slope.

24.60 Wash, 5 lks. wide, course NW. Asc. 227 ft. over SW slope.

50.30 Spur, brs. N. Desc. gradual N. slope.

55.30 The cor. of secs. 7 & 18.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, paloverde, mesquite & madrono.  
 Undergrowth, cacti, catclaw and paloehristo.

N. 0° 03' W., on true line, bet. secs. 7 & 8.  
 Over mountainous land, thru scattering timber & undergrowth. Desc. 163 ft. over N. slope.

6.55 Wash, 10 lks. wide, course W. Asc. 41 ft. over S. slope.

9.50 Spur, brs. W. Desc. 207 ft. over N. slope.

Survey of the Subdivision Lines of T.8 N., R.3 W.

Chains

20.00

Enter King Solomon wash, course West.

23.00

Leave " " " " " "

Asc. 201 ft. over S. slope.

32.25

Road, to Monte Christo mine, brs. NE-SW.

39.40

Old road, brs. NE-SW.

40.00

Set an iron post 5 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, deposit a stone marked with a cross (+) at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 7 & 8, with brass cap marked



1930 from which, a 4 in. cross chiseled in SW face of outcropping ledge, brs. N.75°50'E., 19 lks. dist. also chiseled BOS8 alongside.

USBM 3187 in T8N R4W brs. S.75 1/4°E.

Vulture Peak brs. S.43°W.

USBM 4370 brs. S.62 1/2°E.

Sayers P.O. brs. S.46 1/2°W.

No bearing trees available.

Asc. 52 ft. over S. slope.

43.40

Spur, brs. W. Desc. 50 ft. over N. slope.

44.00

Old road, brs. NE-SW.

50.00

Wash, near head, course SW. Asc. 206 ft. over steep S. slope.

53.00

From which, USLM No.2489 brs. S.74 1/4°E. 5.75 chs. dist. The monument is a granite stone 18 x 24 x 12 ins. above ground, firmly set, marked USLM 2489 on top, witnessed by mound of stone and bearing rocks.

60.25


Divide, brs. W. and SE. Desc. 368 ft. over N. slope.

From which, Sayers P.O. brs. S.26°40'W.

a house brs. S.26°45'W.

80.00

Set an iron post 3 ft. long, 2 ins. in diam., 16 ins. in the ground to bedrock, deposit a stone marked with a cross (+) at base of post, raise a mound of stone about post, for the cor. of secs. 5, 6, 7 and 8, with brass cap marked



1930 from which, a 4 in. cross, chiseled on outcropping boulder brs. N.62 1/4°E., 32 lks. dist. Also marked BOS5

a 4 in. cross, chiseled on outcropping boulder brs. S.20°10'W., 20 lks. dist. Also marked BOS7

Rich Hill, brs. N.38°05'W.

No bearing trees available.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, paloverde and mesquite.

Undergrowth, cacti, catclaw and palochristo.

40.00

N.89°58'E., on a random line, bet. secs. 5 and 8.

79.92

Set temp. 1/4 sec. cor.

Run 12 lks. S. of the cor. of secs. 4, 5, 8 & 9.

Survey of the Subdivision Lines of T. 8 N., R. 3 W.

- Chains Thence, S. 89° 53' W., on true line, bet. secs. 5 and 8. Over mountainous land, thru scattering timber & undergrowth. Desc. 216 ft. over steep SW. slope.
- 5.90 Intersect the NE. side line (3-4) of the "Yellow Jacket" patented lode mining claim, at 10.83 chs. S. 38° 25' E. of Cor. No. 3. Across patented mineral land. (M.S.1957)
  - 12.70 Spur, brs. S. Desc. 77 ft. over W. slope.
  - 14.00 Head of wash, course S. Asc. 47 ft. over E. slope.
  - 19.90 Spur, brs. S. Desc. 8 ft. over S. slope.
  - 21.70 Spur, brs. SW. Desc. 365 ft. over SW. slope.
  - 23.36 Intersect the NW. end line (2-3) of the "St. Paul" pat. lode mining claim, Min. Sur. No. 1957, at 6 lks. S. 51° 35' W., of the N. E. C. Cor. thereof. Leave patented land.
  - 36.20 Slope changes to NW.
  - 36.90 Road to the Monte Cristo mine, brs. N-S.
  - 39.96 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit an iron bolt at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 5 and 8, with brass cap marked
- $$\frac{1}{4} \frac{S 5}{S 8}$$

1930.
- No bearing trees available. Desc. 34 ft. over SW. slope.
  - 40.75 Enter wash, 10 lks. wide, course W. Over sandy bottom.
  - 43.60 Leave wash, course SW. Asc. 11 ft. over E. slope.
  - 44.50 Spur, brs. S. Desc. 29 ft. over W. slope.
  - 45.60 Wash, 10 lks. wide, course NW. Asc. 29 ft. over NE. slope.
  - 48.10 Spur, brs. NW. Road on same brs. NW-SE.
  - 52.74 Intersect the NE. side line (3-4) of the "Bloo Neley" pat. lode mining claim, Min. Sur. No. 2490, at 1.80 chs. S. 60° E., of Cor. No. 4 thereof. Across patented mineral land.
  - 53.70 Old road, brs. NE-SW. Desc. 98 ft. over SW. slope.
  - 58.75 Wash, 20 lks. wide, course NW. Asc. 94 ft. over NE. slope
  - 70.87 Intersect the SW. side line (1-2) of the "Home" patented lode mining claim, Min. Sur. No. 2490 at 8.78 chs. S. 60° E., of Cor. No. 1. Leave patented mineral lands.
  - 72.85 Spur, brs. NW. Desc. 18 ft. over SW. slope.
  - 74.60 Head of wash, course NW. Asc. 81 ft. over NE. slope.
  - 77.75 Spur, brs. NW. Desc. 34 ft. over SW. slope.
  - 79.80 Wash, 5 lks. wide, course NW. Asc. gradual NE. slope.
  - 79.92 The cor. of secs. 5, 6, 7 and 8.  
Land, mountainous.  
Soil, rocky, 4th rate.  
Timber, palo verde and mesquite.  
Undergrowth, cacti, catclaw and palo christo.
- 
- S. 89° 52' W., on a random line, bet. secs. 6 and 7.
  - 40.00 Set temp. 1/4 sec. cor.
  - 55.27 Fall 11 lks. N. of cor. of secs. 6 and 7, on W. bdy. of Tp., hereinbefore described.  
Thence, N. 89° 45' E., on true line, bet. secs. 6 and 7. Over mountainous land, thru scattering timber & undergrowth. Desc. 120 ft. over E. slope.
  - 4.80 Wash, 10 lks. wide, course NE. A spring brs. N. 10 lks. dist. Asc. 95 ft. over NW. slope.
  - 10.00 Spur, brs. NW. Desc. 26 ft. over E. slope.
  - 12.00 Quartz ledge, 20 ft. high, 15 ft. thick, 50 ft. long on line.
  - 12.70 Head of wash, course N. Asc. 26 ft. over W. slope.

Survey of the Subdivision Lines of T. 8 N., R. 3 W.

Chains

15.27 Set an iron post 3 ft. long, 1 in. in diam., 22 ins. in the ground to bedrock, deposit an iron bolt at base of post, raise a mound of stone about post, for the cor. of secs. 6 and 7, with brass cap marked

1/4 S 6  
S 7  
1930

No bearing trees available.

- 15.80 Spur, brs. NE. Desc. 79 ft. over SE. slope.
- 19.17 Wash, 5 lks. wide, course NE. Asc. 77 ft. over NW. slope
- 22.27 Spur, brs. N. Desc. 18 ft. over E. slope.
- 23.67 Head of wash, course N. Asc. 36 ft. over W. slope.
- 25.42 Spur, brs. N. Desc. 43 ft. over E. slope.
- 29.80 Wash, 5 lks. wide, course NW. Asc. 105 ft. over NW. slope.
- 34.67 Spur, brs. NW. Desc. 73 ft. over NE. slope.
- 40.57 Wash, 10 lks. wide, course NW. Asc. 32 ft. over SW. slope.
- 46.10 Spur, brs. NW. Desc. 33 ft. over NE. slope.
- 47.70 Wash, 10 lks. wide, course NW. Asc. 69 ft. over SW. slope.
- 53.37 Spur, brs. NW. Desc. 47 ft. over NE. slope.
- 55.27 The cor. of secs. 5, 6, 7 and 8.

Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, mesquite and palo verde.  
 Undergrowth, cacti, catclaw and palo christo.

-----  
 N. 0° 03' W., on true line, bet. secs. 5 and 6.  
 Over mountainous land, thru scattering timber and undergrowth. Desc. gradual NE. slope.

- .50 Wash, 5 lks. wide, course NW. Asc. 12 ft. over SW. slope
- 2.80 Spur, brs. NW. Desc. 214 ft. over NE. slope.
- 16.20 Wash, 10 lks. wide, course NE. Asc. 9 ft. over SW. slope.
- 24.40 Spur, brs. E. Desc. 78 ft. over N. slope.
- 31.50 Center of wash, 40 lks. wide, course NW. Asc. 69 ft. over SW. slope.
- 38.90 Wash, 5 lks. wide, course SW. Asc. 32 ft. over SE. slope
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 22 ins. in the ground to bed rock, deposit a track spike at base of post, raise a mound of stone about post, for the 1/4 sec. cor. of secs. 5 and 6, with brass cap marked

S 6 | S 5  
1930

From which:

- A boulder, 4 x 6 x 3 ft. above ground, mark same with cross (x) B0S5, which brs. N. 71° 08' E., 29 lks. dist.
- A boulder, 2 x 3 x 2 ft. above ground, mark same with cross (x) B0S6, which brs. N. 84 1/2° W., 86 lks. dist.

Asc. 116 ft. over S. slope.

- 44.30 Power line, brs. E-W.
- 46.60 Spur, brs. W. Desc. 33 ft. over N. slope.
- 49.10 Wash, at head, course W. Asc. 130 ft. over S. slope.
- 53.85 Rocky spur, brs. W. Desc. 32 ft. over N. slope.
- 55.80 Head of wash, course W. Asc. 41 ft. over S. slope.
- 59.78 Spur, brs. W. Desc. 316 ft. over steep, rocky N. slope.
- 68.75 Wash, 20 lks. wide, course W. Asc. 53 ft. over S. slope.
- 70.90 Spur, brs. W. Desc. 39 ft. over N. slope.


Survey of the Subdivision Lines of T.8 N., R.3 W.

Chains

74.10 Wash, at head, course W. Asc. 39 ft. over S. slope.

74.70 Intersect the 2nd. Std. Par. N., at 2.64 chs. E. of the Std. cor. of secs. 33 and 32, described in book "A" of this group.

At point of intersection set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, deposit a track spike at base of post, raise a mound of stone about post, for the closing corner of secs. 5 and 6, with brass cap marked



No bearing trees available.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, paloverde and mesquite.

Undergrowth, cacti, catclaw and palochristo.

[Faint, mostly illegible text, possibly bleed-through from the reverse side of the page]

[Faint, mostly illegible text, possibly bleed-through from the reverse side of the page]

GENERAL DESCRIPTION.

**Land:** The lands within this township lie on the NE and NW slopes of the Wickenburg Mts. The drainage to the Northeast is into Castle Creek, while the remainder of the township drains into the Hassayampa river. The lands are mountainous in character with an elevation above sea level ranging from 2500 ft. in the southwestern corner, to 4500 ft. in the northern portion.

**Timber:** There is a scattering growth of paloverde, mesquite, ironwood, madrono and cedar throughout the township, while along the larger washes some willow and cottonwood was found.

**Undergrowth:** Over the greater part of the lands, grows cacti, catclaw, oakbrush, palochristo and other desert brush.

**Water:** Water was found in secs. 6, 7, 11, 13, 17, 20, 24 and 27. and 36.

**Settlement:** The chief settlements were found in secs. 29, 30, and 5 and 6, consisting of mining camps. There is a goat camp in sec. 11.

Some development work is being carried on at the Copper Belt Mine in sec. 5 as well as at the Tindale Mine in sec. 30. The Monte Cristo, quite the largest mine in the township in sec. 4, is at present inactive.

**Roads:** The principal road within the area surveyed is the Constellation-Wickenburg highway, a well graded one over which is most of the automobile travel. Other roads found were in a more or less rough state.

**Industry:** The brushy & mineral nature of the lands render them suitable principally for the grazing and mining industries.

FINAL FIELD TEST

of

Buff Transit No. 18,000

by

Benjamin J. Kinsey U.S. Surveyor.

At same station as described on page 2 hereof, on May 7, May 7, 1930, at same station as described on page 2 hereof, at 9h.00m. a.m., app. t. set off  $34^{\circ}02\frac{1}{2}'N.$  on the lat. arc.,  $16^{\circ}45'N.$  on decl. arc and determine a meridian with the solar which agrees with the true meridian.

At 12h.00m., app. noon, with the lat. arc unchanged, observe the sun on the meridian, the resultant reading of the declination arc is  $16^{\circ}47'N.$ , which agrees with the computed declination of the sun.

At 3h.00m., p.m., app. t., with lat. arc unchanged, set off  $16^{\circ}49'N.$  on the decl. arc and determine a meridian with the solar which is found to agree within 1' of the true meridian.

As all of the obsns. taken during the usual hours of solar work agree within 1' of the true meridian, conclude that the adjustments of the instrument have been maintained during the surveys described in the foregoing notes.



# CERTIFICATE OF UNITED STATES SURVEYOR

I, Benjamin J. Kinsey, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer, for Group 155, Arizona bearing date of the 3rd day of October, 1928, I have well, faithfully, and truly

in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, ~~retraced~~ all those parts or portions of Patented Mining

Claims in T.7 N., R.3 W., T.8 N., R.2 W., and Ts.8 & 9 N., R.3 W., and of two unpatented claims in T.8 N., R.3 W., and surveyed all those parts or portions of

the South and West Boundaries

and Subdivision Lines of

Township 8 North, Range 3 West of the Gila and Salt

River Base and Meridian, in the State of Arizona, which are represented in and by diagram on page 2 hereof

the foregoing field notes ~~as~~ and by diagram on page 2 hereof having been executed by me, and under my direction; and that all the corners of said retracement

and survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer, for Group 155, Arizona

and in the specific manner described in the field notes, and that the foregoing are the original field notes of such retracement and survey.

Place: Phoenix, Arizona.

Date: October 25 1930.

*Benjamin J. Kinsey*  
U. S. Surveyor.

## APPROVAL

OFFICE OF U. S. SUPERVISOR OF SURVEYS,

Benver, Colo., January 30, 1931

The foregoing field notes of the retracement of Patented Mining Claims in T.7 N., R.3 W., T.8 N., R.2 W., and Ts.8 & 9 N., R.3 W., and of two unpatented claims in T.8 N., R.3 W., and of the survey of

the South and West Boundaries and

Subdivision Lines of

Township 8 North, Range 3 West

of the Gila and Salt River Base and Meridian, in the State of Arizona

executed by Benjamin J. Kinsey, U.S. Surveyor

under his special instructions dated October 3, 1928, for Group 155, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the retracements and surveys they describe, are hereby approved.

*Wm. H. Dwyer*  
U. S. Supervisor of Surveys.

~~I certify that the foregoing transcript of the field notes of the above-described surveys in~~  
~~has been correctly copied from the original notes on file in this office.~~

~~U. S. Supervisor of Surveys.~~

BOOK 8894

4-680  
(August, 1926)

**FIELD ASSISTANTS.**  
to  
Benjamin J. Kinsey, U.S. Surveyor

NAMES.	CAPACITY.
McMillan Pollock	1st Chainman
Neil Greenhaw	2nd Chainman
Stanley Brown	Cornerman
Milton McClain	Axman
Jay Brown	Flagman