

(D)

BOOK 3913

# FIELD NOTES

OF THE RESURVEY OF THE

West Boundary of Township 7 South, Range 28 East

South Boundary of Township 6 South, Range 28 East

and Meanders of Right Bank of Gila River in Sec. 31

of Township 6 South, Range 28 East

AND OF THE SURVEY OF THE

East Boundary

and

Subdivision Lines of,

and Meanders of Gila River within,

Township 7 South, Range 28 East

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

Charles E. Hunter, U. S. Transitman

In the capacity of U. S. Surveyor, under Special Instructions dated June 9, 1930, issued by the District Cadastral Engineer to govern surveys included in Group No. 161 Arizona, which were approved by the Commissioner of the General Land Office, July 24, 1930, and Assignment Instructions dated January 5, 1931.

Resurvey and Survey commenced January 17, 1931.

Resurvey and Survey completed February 9, 1931.

3913

3913

# INDEX DIAGRAM.

Township \_\_\_\_\_, Range \_\_\_\_\_

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

GOVERNMENT PRINTING OFFICE


IA






Book "A"

Group 161 Arizona

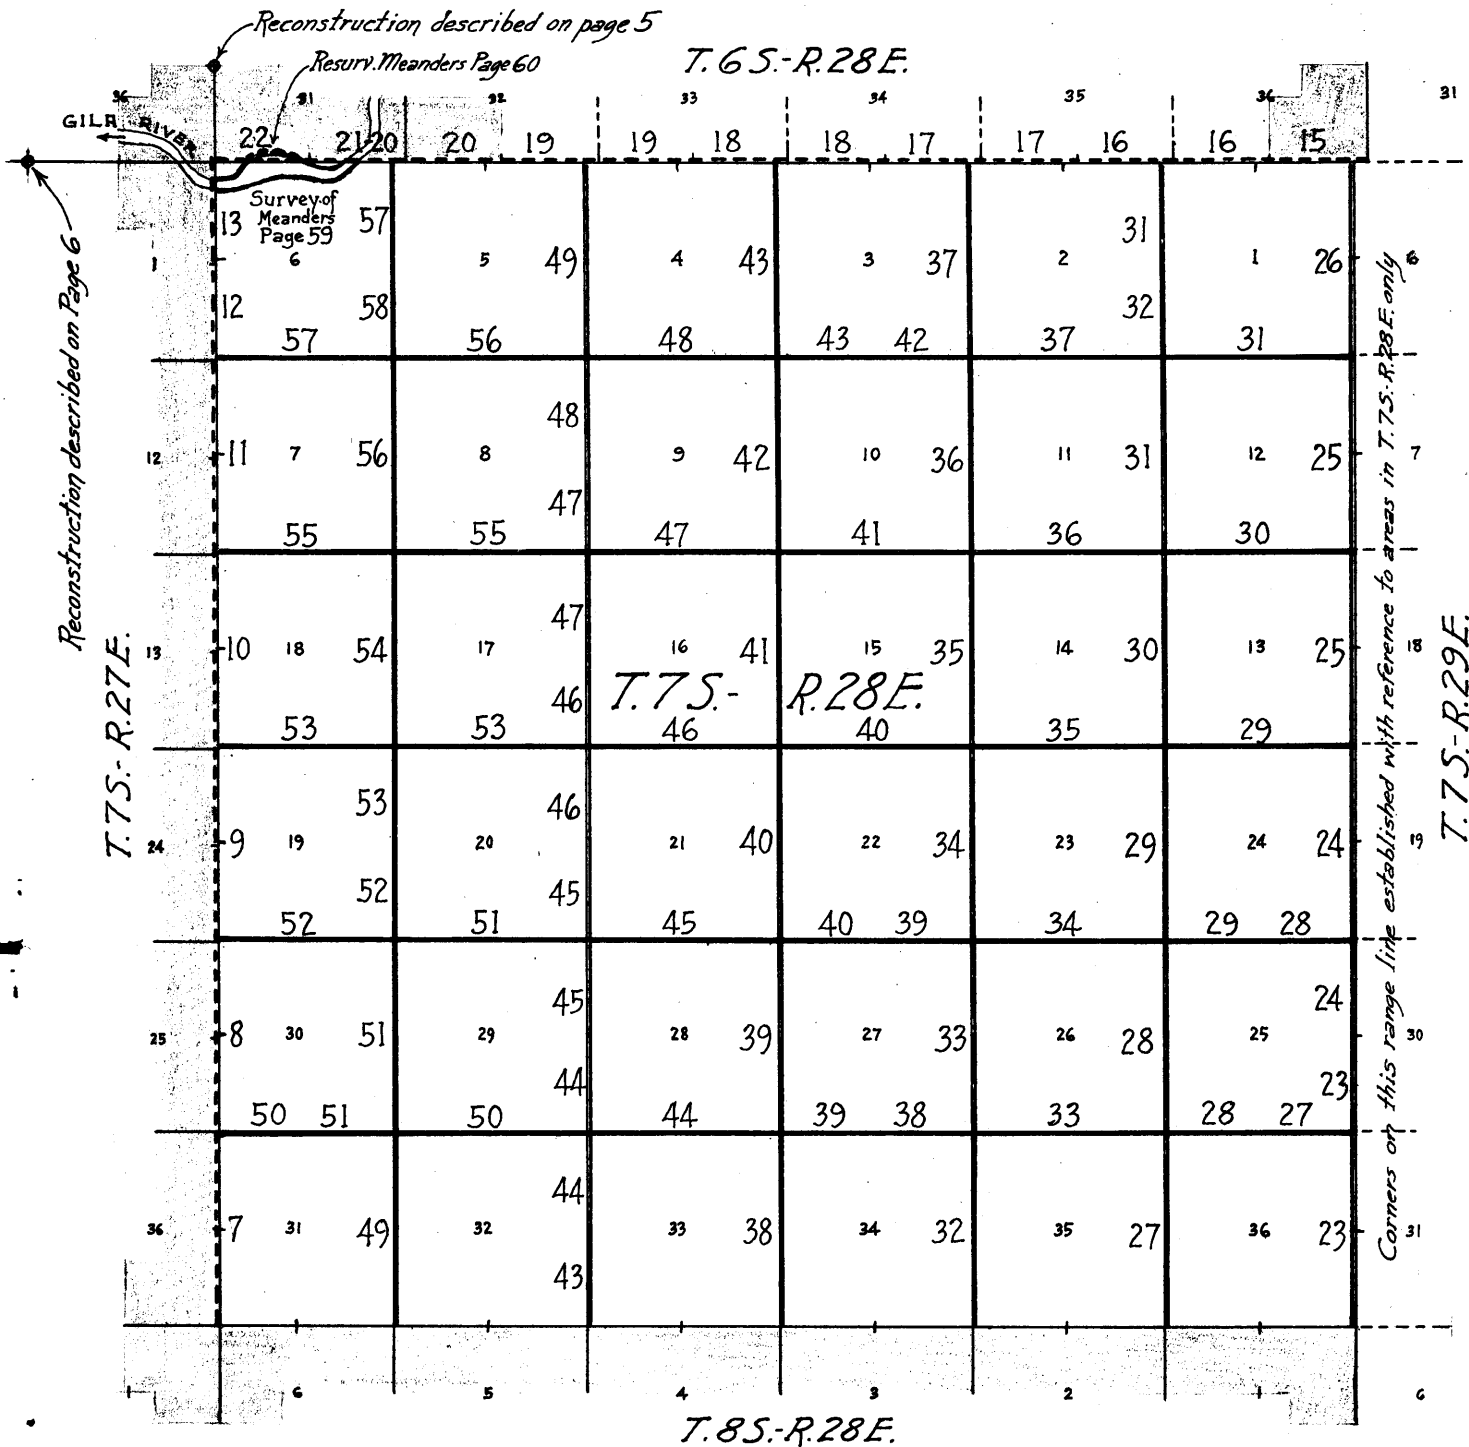INDEX DIAGRAM

BOOK 3913



-  Lines surveyed under this group.
-  Lines resurveyed under this group.
-  Accepted surveyed lines.
-  Unsurveyed.
-  Areas surveyed as per accepted plats on file.

BOOK 3913

Book "A"

Group 161 Arizona

DATE DIAGRAM  
1931

T. 6 S. - R. 28 E.

		31 Meanders Resurveyed 2-7		32		33		34		35		36	
		1-28		1-28		1-28		1-28		1-28		1-23	
GILA RIVER Sec. cor. reconstructed Jan. 20-1931	1-28 2-9 2-6 2-9 2-5 2-9 2-4 2-9 2-2 2-2 1-30 1-30 1-21	2-6 2-6 2-6 2-4 2-2 1-30 1-29 1-21	5 2-5 2-5 2-5 2-2 1-30 1-29 1-27 1-27 1-21 1-19	2-5 2-5 2-2 1-30 1-29 1-27 1-21 1-19	4 2-3 2-5 2-3 2-2 1-30 1-29 1-27 1-27 1-21 1-19	3 2-3 2-3 2-3 1-30 1-29 1-27 1-26 1-21 1-19	2 2-4 1-29 1-27 1-26 1-21 1-19	1-31 1-31 1-31 1-26 1-24 1-24 1-19	1 1-31 1-31 1-26 1-24 1-24 1-17	1-22 1-22 1-22 1-22 1-22 1-17 1-17			

*Surveyed by W.B. Kimmel, U.S.S. in 1914.*

\_\_\_\_ Surveyed under this group by Charles E. Hunter, U.S. Transitman, on dates (1931) shown thereon.

\_\_\_\_ Resurveyed under this group by Charles E. Hunter, U.S. Transitman, on dates (1931) shown thereon.

The resurvey and surveys herein described were executed on dates shown on diagram on page 2 hereof, by Charles E. Hunter, U. S. Transitman, using a Young & Sons transit No. 8584. The instrument is equipped with an improved Smith Solar attachment. The horizontal limb is provided with two double verniers placed opposite each other, reading to single minutes of arc; which is also, the least count of the verniers of the vertical circle, latitude, and declination arcs.

The instrument was approved, subject to the usual field tests, by the district cadastral engineer for Arizona.

Unless otherwise specified, all azimuths are determined with the solar attachment, and all measurements are made with a Lallie steel tape, 5 chains in length, compared with a Lufkin standard steel tape and found correct. The measurements are made on the slope, the vertical angle determined with clinometer or transit, and the slope measurement properly reduced to true horizontal distances for entry in the field notes.

-----  
PRELIMINARY FIELD TEST

of

Young & Sons transit No. 8584

by

Charles E. Hunter, U. S. Transitman.

January 15, 1931; at station near the north bdy. of sec. 14, T. 7 S., R. 27 E., G. & S.R. base and meridian, Arizona, at approximate latitude  $32^{\circ}49\frac{1}{2}'N.$ , and longitude  $109^{\circ}33\frac{1}{2}'W.$ , examine the adjustments of the transit and correct all errors.

At 11<sup>h</sup>55<sup>m</sup> p.m., l.m.t., observe Polaris at western elongation, making four observations, two each with the telescope in the direct and the reverse positions, and mark the line thus determined, with a tack in a stake, driven firmly in the ground, 5 chains north.

Azimuth of Polaris at western elongation is  $1^{\circ}15'42''$

January 16; lay off the azimuth of Polaris  $1^{\circ}15\frac{1}{2}'$  to east and mark the meridian thus determined, by a tack in a stake, driven firmly in the ground, 5 chains north.

At 9<sup>h</sup>00<sup>m</sup> a.m., app.t., with lat. arc set at  $32^{\circ}49\frac{1}{2}'N.$ , and decl. arc set at  $21^{\circ}00'S.$ , determine a meridian with the solar which agrees within 1' of the true meridian.

At app. noon, with the lat. arc unchanged, observe the sun on the meridian; the resultant reading of the decl. arc is  $20^{\circ}59'S.$ , which agrees with the computed decl. of the sun.

At 3<sup>h</sup>00<sup>m</sup> p.m., app.t., with the lat. arc unchanged, and the decl. arc set at  $20^{\circ}57\frac{1}{2}'S.$ , determine a meridian with the solar which agrees within 1' of the true meridian.

As all of the solar observations taken during the usual hours of solar work, agrees within 1' of the true meridian, it is concluded that the instrument is in satisfactory adjustment.

## Resurvey of the West boundary of T. 7 S., R. 28 E.

## Chains

The west bdy. of T. 7 S., R. 28 E., was surveyed due north, by T. W. White, U.S. D.S., in 1875, establishing common reference corners thereon at intervals of 40 chains.

No retracement or resurvey of any part of this township boundary is of record.

The following notes describe a resurvey of this boundary northerly, altering the existing corner monuments, excepting the corners common to secs. 31 and 36, to refer to areas west of the line only, and reestablishing corners referring to areas east of the line only, at such points along this boundary as determined by the closing of the latitudinal lines of the west range of secs. upon it.

-----  
Retracement for Resurvey.  
-----

From the corner of Tps. 7 and 8 S., Rs. 27 and 28 E.

North, on a random line, on the E. bdy. of sec. 36, ( $S\frac{1}{2}$ )

39.78 Fall 3 lks. W. of original  $\frac{1}{4}$  sec. cor. of secs. 31 and 36.

True course and dist. of  $S\frac{1}{2}$  of E. bdy. of sec. 36 are therefore  $N.0^{\circ}03'E.$ , 39.78 chs.

Thence, from the  $\frac{1}{4}$  sec. cor.

North, on a random line, on E. bdy. of sec. 36, ( $N\frac{1}{2}$ )

39.86 Fall 2 lks. W. of original cor. of secs. 25, 30, 31 and 36.

True course and dist. of  $N.\frac{1}{2}$  of E. bdy. of sec. 36 are therefore  $N.0^{\circ}02'E.$ , 39.86 chs.

Thence, from the cor. of secs. 25, 30, 31 and 36.

North, on a random line, searching diligently at record intervals for original cors. Find no trace of any original corner until at

119.67 Fall 14 lks. W. of the original  $\frac{1}{4}$  sec. cor. of secs. 19 and 24.

True course and dist. of Tp. bdy. from original cor. of secs. 25, 30, 31 and 36 to the original  $\frac{1}{4}$  sec. cor. of secs. 19 and 24, are therefore  $N.0^{\circ}04'E.$ , 119.67 chs., which, to maintain original proportion between cor. intervals, gives three intervals of 39.89 chs. each, for the reestablishment of the missing cors.

Thence, from the  $\frac{1}{4}$  sec. cor.

North on a random line, searching diligently at the record dist. for the original cor. of secs. 13, 18, 19 and 24, but find no trace of any original cor. until at

79.90 Fall 5 lks. W. of the original  $\frac{1}{4}$  sec. cor. of secs. 13 and 18.

True course and dist. of Tp. bdy. from the original  $\frac{1}{4}$  sec. cor. of secs. 19 and 24, to the original  $\frac{1}{4}$  sec. cor. of secs. 13 and 18, are therefore  $N.0^{\circ}02'E.$ , 79.90 chs., which, to maintain original proportion between cor. intervals, gives two intervals of 39.95 chs. each, for the reestablishment of the missing cor. of secs.

Resurvey of the West boundary of T. 7 S., R. 28 E.

Chains 13, 18, 19, and 24.

Thence, from the  $\frac{1}{4}$  sec. cor.

North, on a random line, searching diligently at the record dist. for the original cor. of secs. 7, 12, 13 and 18, but find no trace of any original cor. until at

79.86 Intersect the original  $\frac{1}{4}$  sec. cor. of secs. 7 and 12.

True course and dist. of Tp. bdy. from the original  $\frac{1}{4}$  sec. cor. of secs. 13 and 18, to the original  $\frac{1}{4}$  sec. cor. of secs. 7 and 12, are therefore North, 79.86 chs., which, to maintain original proportion between cor. intervals, gives two intervals of 39.93 chs. each, for the reestablishment of the missing cor. of secs. 7, 12, 13 and 18.

Thence, from the  $\frac{1}{4}$  sec. cor.

North, on a random line, on the E. bdy. of sec. 12, (N  $\frac{1}{2}$ )

39.90 Fall 3 lks. W. of the original cor. of secs. 1, 6, 7 and 12.

True course and dist. of N.  $\frac{1}{2}$  of E. bdy. of sec. 12, are therefore N. 0°03'E., 39.90 chs.

Thence, from the original cor. of secs. 1, 6, 7, and 12.

North, on a random line, on the E. bdy. of sec. 1, (S.  $\frac{1}{2}$ )

40.06 Fall 28 lks. E. of the original  $\frac{1}{4}$  sec. cor. of secs. 1 and 6.

True course and dist. of S.  $\frac{1}{2}$  of E. bdy. of sec. 1, are therefore N. 0°24'W., 40.06 chs.

Thence, from the  $\frac{1}{4}$  sec. cor.

North, on a random line, making diligent search at record distances and along the Gila River bank, for the original meander cors., but found no trace of these cors.

40.00 (Record dist.) No trace of the original cor. of Tps. 6 and 7 S., Rs. 27 and 28 E.

Continue line and measurement.

79.15 Fall 97 lks. W. of the original  $\frac{1}{4}$  sec. cor. of secs. 31 and 36, T. 6 S., Rs. 27 and 28 E., which is a granite stone, 14 ins. long, 12 ins. wide, and 6 ins. thick, with  $\frac{1}{4}$  plainly marked on W. face; set in a mound of stone at cor. of old fence which extends E. and S.

Along side of old stone in mound, set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross(x) at base, and raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$  ft. high around post, for  $\frac{1}{4}$  sec. cor. of secs. 31 and 36, with brass cap marked

$\frac{1}{4}$   
S36 | S31  
1931

No bearing trees were available.

Thence, from the  $\frac{1}{4}$  sec. cor.

## Resurvey of the West boundary of T. 7 S., R. 28 E.

Chains	S. $0^{\circ}42'W.$ , on trial line.										
39.57	(Proportional dist.) Set temporary cor. of Tps. 6 and 7 S., Rs. 27 and 28 E. (A) From original cor. of secs. 5, 6, 31 and 32, Tps. 6 and 7 S., R. 28 E. West, on a random line										
40.00	(Record dist.) No trace of the $\frac{1}{4}$ sec. cor. of secs. 6 and 31. Record distances of meander cors. on line bet. secs. 6 and 31 fall in Gila River. Made diligent search near banks of river, along random line, but found no trace of either meander cor.										
78.11	(Record dist.) No trace of the cor. of Tps. 6 and 7 S., Rs. 27 and 28 E. Continue line and measurement.										
118.11	(Record dist.) No trace of the $\frac{1}{4}$ sec. cor. of secs. 1 and 36. Made diligent search at record distances for meander cors. on banks of Gila River, but found no trace of either cor.										
158.42	Fall 23 lks. S. of the original cor. of secs. 1, 2, 35 and 36, which is a malpais stone, 12 ins. wide, 6 ins. thick, 6 ins. above ground, marked, T 7 S R 27 E on on S., T 6 S on N., with 5 notches on W. and 1 notch on E. face. Along side of old stone, set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground, for reestablishment of cor. of secs. 1, 2, 35 and 36, with brass cap marked <div style="text-align: center;"> <table border="1"> <tr><td>T6S</td><td>R27E</td></tr> <tr><td>S35</td><td>S36</td></tr> <tr><td>S 2</td><td>S1</td></tr> <tr><td colspan="2">T7S</td></tr> <tr><td colspan="2">1931</td></tr> </table> </div> No bearing trees available. Raised a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Thence S. $89^{\circ}55'E.$ , on trial line.	T6S	R27E	S35	S36	S 2	S1	T7S		1931	
T6S	R27E										
S35	S36										
S 2	S1										
T7S											
1931											
80.16	(Proportional dist.) Set temporary corner of Tps. 6 and 7 S., Rs. 27 and 28 E., (B) From temp. cor. "B" to temp. cor. "A" is North 24 lks., and West 46 lks. The true point for reestablishment of the cor. of Tps. 6 and 7 S., Rs. 27 and 28 E., is therefore 46 lks. East from temporary cor. "A", and 24 lks. North from temporary cor. "B" The true courses and distances of the portions of the township boundaries controlled by this Tp. cor. are: N. $\frac{1}{2}$ of E. bdy. of sec. 1, T. 7 S., R. 27 E., N. $1^{\circ}25'E.$ , 39.58 chs.										




Resurvey of the West boundary of T. 7 S., R. 28 E.

Chains

S.  $\frac{1}{2}$  of line bet. secs. 31 and 36, T. 6 S., Rs. 27 and 28 E., N. 0°02'W., 39.57 chs.  
 E.  $\frac{1}{2}$  of S. bdy. of sec. 31, T. 6 S., R. 28 E., N 89°44'W., 40.08 chs.  
 W.  $\frac{1}{2}$  of S. bdy. of sec. 31, T. 6 S., R. 28 E., N. 89°44'W., 38.18 chs.  
 Line bet. secs. 1 and 36, Tps. 6 and 7 S., R. 27 E., S. 89°55'W., 80.16 chs.

-----  
 RESURVEY.  
 -----

From the cor. of Tps. 7 and 8 S., Rs. 27 and 28 E., which was reconstructed by William B. Kimmel, U. S. S., in 1914, an iron post, 3 ins. in diam., 10 ins. above ground, witnessed by a mound of stone, 3 ft. base, 2 ft. high, to S., with brass cap marked




N. 0°03'E., on true line bet. secs. 31 and 36 (S $\frac{1}{2}$ )

- 9.80 Over slightly rolling ground, through low brush.
- 31.10 Wash, 20 lks. wide, course W.
- 35.00 Dim road, brs. N. 50°W., and S. 50°E.
- 39.78 Draw, course W.
- The original  $\frac{1}{4}$  sec. cor. of sec. 31 and 36, which is a fragment of charred stake, in a mound of earth, from which
  - A mesquite stump, with illegible markings, brs. S. 10° 30'E., 148 lks. dist.
  - A mesquite stump, 7 ins. in diam., with illegible markings, brs. S. 76°15'E., 188 lks. dist.

Reconstruct this cor. as follows:

Along side of old stake, set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 31 and 36, with brass cap marked



No bearing trees available; raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Thence,

- 21.56 N. 0°02'E., on a true line, bet. secs. 31 and 36 (N $\frac{1}{2}$ )  
Over slightly rolling ground, through low brush.  
Wash, 30 lks. wide, course W.
- 39.86 The original cor. of secs. 25, 30, 31 and 36, which is a mesquite stake, 2 ft. long, 4 ins. square, with illegible markings on sides, imbedded in old mound of earth.

Resurvey of the West boundary of T. 7 S., R. 28 E.


Chains

Reconstruct this cor. as follows:  
Along side of old stake, set an iron post, 3 ft. long,  
2 ins. in diam., 27 ins. in the ground, for cor. of secs.  
25, 30, 31 and 36, with brass cap marked

T7S	
R27E	R28E
S25	S30
S36	S31
1931	

No bearing trees available; raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, slightly rolling.  
Soil, gravelly loam; 2nd rate.  
Undergrowth, greasewood and mesquite.



N. 0°04'E., on a true line, on the W. bdy. of sec. 30.  
Over slightly rolling ground, through low brush.

7.90  
27.80  
31.90

Wash, 180 lks. wide, course W.  
Small wash, course W.  
Dim road, brs. N. 20°W., and S. 20°E.

39.89

(Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for reestablished  $\frac{1}{4}$  sec. cor. of sec. 25 only, with brass cap marked

$\frac{1}{4}$	
S25	
1931	

No bearing trees available; raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

40.15

(Midpoint bet. the cor. of secs. 25, 30, 31 and 36. and the closing cor. of secs. 19 and 30)  
Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for reestablished  $\frac{1}{4}$  sec. cor. of sec. 30 only, with brass cap marked

$\frac{1}{4}$	
S30	
1931	

No bearing trees available; raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.

48.20  
54.70

Dim road, brs. N. 70°W. and S. 70°E  
Wash, 40 lks. wide, course W.

79.78

(Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for reestablished cor. of secs. 24 and 25 only, with brass cap marked

T7S	T7S
S24	
S25	R28E
R27E	S30
1931	

Resurvey of the West boundary of T. 7 S., R. 28 E.

Chains  
80.30

Intersect subdivisional line bet. secs. 19 and 30, surveyed due west.

Closing cor. of said secs. established at this point of intersection, as hereinafter described.

Land, slightly rolling.  
Soil, gravelly loam; 2nd rate.  
Undergrowth, greasewood and mesquite.


27.00  
27.40  
39.37

N.0°04'E., on true line, on W. bdy. of sec. 19.  
Over slightly rolling ground, through scattering brush.

Telephone line, bears E. and W.  
Wash, 10 lks. wide, course W.

(39.89 chs. in lat. from the cor. of secs. 24 and 25, T. 7 S., R. 27 E.) reestablished at proportional dist., intersect  
Intersect original 1/4 sec. cor. of secs. 19 and 24, which is a  
mesquite stake, 3 ins. square, 1 ft. above ground, blazed on sides, but without visible markings.


Reconstruct this cor. as follows;  
Along side of old stake, set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone around post, for 1/4 sec. cor. of sec. 24 only, with brass cap marked



40.00

Thence  
N.0°02'E., on true line, continuing measurement of W. bdy. of sec. 19.

(Midpoint on the W. bdy. of sec. 19) Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground, to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 5 ft. base, 2 ft. high, around post, for reestablished 1/4 sec. cor. of sec. 19 only, with brass cap marked




No bearing trees available.

41.97  
71.97  
79.32

Wash, 10 lks. wide, course W.  
Wash, 10 lks. wide, course W.

(39.95 chs. in lat. from the 1/4 sec. cor. of sec. 24) reestablished  
Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for reestablished cor. of of secs. 13 and 24, only, with brass cap marked



No bearing trees available. Raised a mound of stone 3 ft. base, 2 ft. high, W. of cor.

80.00

Intersect subdivisional line bet. secs. 18 and 19, surveyed due west.

Closing cor. of said secs. established at this point of intersection, as hereinafter described.

Resurvey of the West boundary of T. 7 S., R. 28 E.

Chains


Land, slightly rolling.  
Soil, gravelly loam; 2nd rate.  
Undergrowth, greasewood and mesquite.

N. 0°02'E., on true line, on W. bdy. of sec. 18.

3.20  
27.37  
39.27

Over level land, through scattering brush.  
Small drain, course S. 80°W.  
Old abandoned Safford and Clifton road, bears E. and W.  
(39.95chs. in lat. from the reestablished cor. of secs. 13  
and 24.) Intersect the original  $\frac{1}{4}$  sec. cor. of secs.  
13 and 18, which is an old mound of stone. Reconstruct  
this cor. to refer to sec. 13 only, as follows:

In center of old mound, set an iron post, 3 ft. long, 1  
in. in diam., 18 ins. in the ground, to bedrock; deposit  
a stone, marked with a cross (x) at base, and raise a  
mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, around post,  
for  $\frac{1}{4}$  sec. cor. of sec. 13 only, with brass cap marked




No bearing trees available.

Thence, North, on true line, continuing measurement of  
W. bdy. of sec. 18.

39.96


(Midpoint on W. bdy. of sec. 18) Set an iron post, 3 ft.  
long, 1 in. in diam., 26 ins. in the ground, for reestablished  $\frac{1}{4}$   
sec. cor. of sec. 18 only, with brass cap marked



No bearing trees available. Raised a mound of stone, 3  
ft. base,  $1\frac{1}{2}$  ft. high, E. of cor.

44.80  
50.30  
53.20  
65.90  
79.20

Dim road, N. 40°W. and S. 40°E.  
Dim road, N. 70°E. and S. 70°W.  
Wash, 20 lks. wide, N. 60°W.  
Wash, 10 links wide, course W.  
(39.93 chs. in lat. from the  $\frac{1}{4}$  sec. cor. of sec. 13).  
Set an iron post, 3 ft. long, 2 ins. in  
diam., 26 ins. in the ground, for reestablished cor. of  
secs. 12 and 13 only, with brass cap marked



No bearing trees available. Raised a mound of stone,  
3 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

79.92

Intersect subdivisional line bet. secs. 7 and 18, survey-  
ed due west.  
Closing cor. of said secs. established at this point of  
intersection, as hereinafter described.

Land, slightly rolling.  
Soil, gravelly loam; 2nd rate.  
Undergrowth, scattering greasewood and mesquite.

Resurvey of the West boundary of T. 7 S., R. 28 E.

Chains

6.90 North, on true line, on W. bdy. of sec. 7.  
 31.20 Over rolling ground, through low brush.  
 35.20 U. S. Highway No. 180 brs. E. and W.  
 39.21 Drain, course N.20°W.; asc. slightly.  
 (39.93 chs. in lat. from the reestablished cor. of secs. 12 and 13, T. 7 S., R. 27 E.) Intersect original  $\frac{1}{4}$  sec. cor. of secs. 7 and 12, which is an old mound of stone, Reconstruct this cor. to refer to sec. 12 only, as follows:  
 In center of old mound, set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 5 ft. base, 2 ft. high around post, for  $\frac{1}{4}$  sec. cor. of sec. 12 only, with brass cap marked

$\frac{1}{4}$   
 S12  
 1931

No bearing trees available.

Thence

40.00 N.0°03'E., on true line, continuing measurement of W. bdy. of sec. 7.  
 (Midpoint on W. bdy. of sec. 7) set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone around post, for reestablished  $\frac{1}{4}$  sec. cor. of sec. 7 only, with brass cap marked

$\frac{1}{4}$   
 S7  
 1931

No bearing trees available.

40.90 Previously mentioned drain, course N.30°E.  
 53.60 Wash, 30 lks. wide, course W.  
 61.70 Wash, 30 lks. wide, course W.  
 73.60 Dim road, brs. E. and W.  
 75.40 Leave mesa land, desc. 46 ft.  
 77.70 Foot of slope, thence over level land.  
 79.11 Intersect original cor. of secs. 1, 6, 7 and 12, which is a partially decomposed mesquite stake, in old mound of stone. Reconstruct this cor. to refer to areas to W. of line only, as follows:  
 Along side of old stake in mound, set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for recon of secs. 1 and 12 only, with brass cap, marked as follows:

T7S | T7S  
 S1 | R28E  
 S12 |  
 R27 E S7  
 1931

No bearing trees available; Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Thence

79.99 N.0°24'W., on true line, continuing measurement of W. bdy. of sec. 7.  
 Intersect subdivisional line bet. secs. 6 and 7, surveyed due W.  
 Closing cor. established at this point of intersection, for said secs. as hereinafter described.

Resurvey of the West boundary of T. 7 S., R. 28 E.

Chains	<p>Land, rolling. Soil, gravelly loam; 2nd rate. Undergrowth, sage, greasewood and mesquite.</p> <p>-----</p> <p>N. 0°24'W., on true line, on W. bdy. of sec. 6. Over slightly rolling ground, through scattering brush. Wash, 180 lks. wide, course N. 50°W. Wash, 40 lks. wide, course W.; asc. 34 ft. Spur, slopes W. desc. 109 ft. over N. slope. Foot of slope, thence over level ground, Intersect original <math>\frac{1}{4}</math> sec. cor. of secs. 1 and 6, which is a mesquite stake, 2 ft. long, 3 ins. square, set in an old mound of stone. Reconstruct this cor. to refer to areas to W. of line only, as follows: Along side of old stake, set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for reestablished <math>\frac{1}{4}</math> sec. cor. of sec. 1 only, with brass cap marked:</p> <div style="text-align: center;"> <math>\frac{1}{4}</math>                 S1        1931     </div> <p>No bearing trees available. Raised a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <p>Thence N. 1°25'E., on true line, continuing measurement of W. bdy. of sec. 6. Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for reestablished <math>\frac{1}{4}</math> sec. cor. of sec. 6 only, with brass cap marked</p> <div style="text-align: center;"> <math>\frac{1}{4}</math>                 S6        1931     </div> <p>No bearing trees available. Raise a mound of stone, 3 ft. base, 1<math>\frac{1}{2}</math> ft. high, E. of cor.</p> <p>Dim road, N 80°E. and S. 80°W. Wash, 15 lks. wide, course N. 60°W. Desc. 28 ft. over N. slope to river bottom land. Bend in dim road, brs. N. 15°E., and N. 50°W. Enter timber and dense undergrowth. Small cabin, bears W. about 3 chs. dist. South and left bank of Gila River, set an iron post, 3 ft. long, 1 ins. in diam., 27 ins. in the ground, for reestablished meander cor. of secs. 1 and 6, with brass cap marked</p> <div style="text-align: center;">       MC        S1   S6        R27E   R28E        T7S        1931     </div> <p>No bearing trees available. Raised a mound of stone, 3 ft. base, 2 ft. high, S. of cor. Bank of river, 4 ft. high.</p> <p>North and right bank of Gila River, set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for reestablished meander cor. of secs. 1 and 6, with brass cap marked</p> <div style="text-align: center;">       T7S        R27E   R28E        S1   S6        MC        1931     </div> <p>From which</p>
2.90	
16.40	
20.90	
32.90	
39.18	
40.00	
40.40	
41.70	
58.70	
61.70	
62.40	
64.18	
70.90	
74.02	

Resurvey of the West boundary of T. 7 S., R. 28 E.

Chains


A cottonwood tree, 8 ins. in diam., brs. N.57°E. 29 lks. dist., marked T7S R28E S6 MC BT.  
 A cottonwood tree, 14 ins. in diam., brs. N.41°W., 64 lks. dist., marked T7S R27E S1 MC BT.  
 Bank of river, 3 ft. high.

Thence over level bottom land, through scattering timber and brush.

78.76


Proportional dist. N. and S. bet. the original  $\frac{1}{4}$  sec. cor. of secs. 1 and 6, T.7S., Rs. 27 and 28 E., and the original  $\frac{1}{4}$  sec. cor. of secs. 31 and 36, T.6S., Rs. 27 and 28 E., and E. and W. bet. the original cor. of secs. 5, 6, 31 and 32, Tps. 6 and 7 S., R. 28 E., and the original cor. of secs. 1, 2, 35 and 36, Tps. 6 and 7 S., R. 27 E. Reestablish missing Tp. cor. at this point as follows:

Set an iron post, 3 ft. long, 3 ins. in diam., 28 ins. in in the ground, for reestablished cor. of Tps. 6 and 7 S., Rs. 27 and 28 E., with brass cap marked



No bearing trees available; raised a mound of stone, 3 ft. base, 2 ft. high S. of cor.

Land, slightly rolling mesa and level river bottom.  
 Soil, gravelly and sandy loam; 2nd rate.  
 Timber, cottonwood and mesquite.  
 Undergrowth, greasewood, reeds and cactus.



## Resurvey of the South boundary of T. 6 S., R. 28 E.

## Chains

The south boundary of T. 6 S., R. 28 E., was surveyed due east, by P. Contzen, U.S. D.S., in 1895, establishing meander cors. at intersection of boundary with banks of Gila River; a  $\frac{1}{4}$  sec. cor. of secs. 6 and 31, at 38.11 chs. E., and remaining sec. and  $\frac{1}{4}$  sec. cors. at intervals of 40 chs. each, terminating line with the cor. of Tps. 6 and 7 S., Rs. 28 and 29 E.

The cor. of Tps. 6 and 7 S., Rs. 27 and 28 E., was reconstructed in position, by Deputy Contzen, previous to his making the survey of this boundary.

The following notes describe a resurvey of this boundary as follows:

First,

A dependent resurvey of that portion bet. the reestablished cor. of Tps. 6 and 7 S., Rs. 27 and 28 E., and the original  $\frac{1}{4}$  sec. cor. of secs. 5 and 32; and a dependent resurvey, bet. the original cor. of Tps. 6 and 7 S., Rs. 28 and 29 E., and the original  $\frac{1}{4}$  sec. cor. of secs. 1 and 36, all reconstructed or reestablished cors. along such portions of this boundary, altered to refer to areas to the north only.

Second,

An independent resurvey of that portion bet. the original  $\frac{1}{4}$  sec. cor. of secs. 1 and 36, and the original  $\frac{1}{4}$  sec. cor. of secs. 5 and 32, destroying all intermediate existing cors.; reestablishing a cor. of secs. 35 and 36, on true line bet. said cors. at 80 chs. west in departure from the original cor. of Tps. 6 and 7 S., Rs. 28 and 29 E., and setting  $\frac{1}{4}$  sec. and sec. cors. alternately, at intervals of 40 chs. in departure west, placing the deficiency of measurement in the east half of the south boundary of sec. 32. All cors. reestablished with reference to areas to the north only.

And also,

The reestablishment of cors. referring to areas to the south only, initiated at the closing cor. of Tp. 7 S., Rs. 28 and 29 E., established at the intersection of east boundary of T. 7 S., R. 28 E., surveyed due north as hereinafter described. Said cors. established at intervals of 40 chs. in departure west, placing the deficiency of measurement in the west  $\frac{1}{2}$  of the north bdy. of sec. 6.

-----  
Retracement for Resurvey.  
-----

39.62 From the cor. of Tps. 6 and 7 S., Rs. 28 and 29 E. West, on a random line, on S. bdy. of sec. 36, ( $E\frac{1}{2}$ ) Fall 6 lks. S. of original  $\frac{1}{4}$  sec. cor. of secs. 1 and 36. True course and dist. of E.  $\frac{1}{2}$  of S. bdy. of sec. 36 are therefore, N.  $89^{\circ}55'W.$ , 39.62 chs.

319.26 Thence, West, on a random line, on S. bdy. of T. 6 S., R. 28 E. Fall 46 lks. S. of original  $\frac{1}{4}$  sec. cor. of secs. 5 and 32. True course and dist. of portion of S. bdy. of township, bet. the original  $\frac{1}{4}$  sec. cors. of secs. 1 and 36, and secs. 5 and 32, are therefore, N.  $89^{\circ}55'W.$ , 319.26 chs.

40.09 Thence, West, on a random line, on S. bdy. of sec. 32, ( $W\frac{1}{2}$ ) Intersect original cor. of secs. 5, 6, 31 and 32. True course and dist. of W.  $\frac{1}{2}$  of S. bdy. of sec. 32, are therefore, West, 40.09 chs.

Retracement for resurvey of S. bdy. of sec. 31, previously described herein, in connection with description of resurvey of W. bdy. of T. 7 S., R. 28 E.



Resurvey of the South Boundary of T.6 S., R.28 E.

Chains

RESURVEY

X

The original cor. of Tps. 6 and 7 S., Rs. 28 and 29 E., is a malpais stone, 14 x 10 x 14 ins. above ground, mkd. with 6 notches on N., S., E. and W. edges; with T6S on NE., R28E on NW., T7S on SW. and R29E on SE. faces, and witnessed by a mound of stone S. of cor. Reconstruct this cor. to refer to Tp.6 S., R.28 E., only, as follows: Alongside of old stone, set an iron post, 3 ft. long, 3 ins. diam., 26 ins. in the ground, for cor. of Tp.6 S., R.28 E., only, with brass cap mkd.

T6S  
R28E  
S36

T7S R29E

1931

No bearing trees available. Remove old mound of stone from position to S. and reconstruct mound of stone, 3 ft. base, 2 ft. high, to NW. of cor.

Thence N.89°55'W., on true line, on E. 1/2 of S. bdy. of sec. 36. Over rocky SE. slope; through scattering brush, desc. 93 ft.

3.20 Drain, course S.20°W.

5.74 Intersect E. bdy. of T.7 S., R.28 E., surveyed due North. The closing cor. established at this point of intersection is hereinbefore described.

22.00 Wash, 40 lks. wide, course SW.; thence along gradual S. slope.

39.62 The original 1/4 sec. cor. of secs. 1 and 36, which is a malpais stone, 8 x 8 x 6 ins. above ground, mkd. 1/4 on N. face, and witnessed by a mound of stone to N. Reconstruct this cor. to refer to areas to the N., only, as follows: Alongside of old stone, set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor. of sec. 36, only, with brass cap mkd.

1/4 S36

1931

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Thence N.89°55'W., on true line, on W. 1/2 of S. bdy. of sec. 36. 6.12 (40.00 chs. in departure from the closing cor. of T.7 S., Rs. 28 and 29 E.) Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for reestablished 1/4 sec. cor., of sec. 1, only, with brass cap mkd.

1/4 S1

1931

No bearing trees available. Raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

11.50 Wash, 30 lks. wide, course S.; asc. 31 ft.

27.30 Low spur, slopes S.; desc. 23 ft.

40.16 The original cor. of secs. 1, 2, 35, and 36, a malpais stone, 10 x 12 x 12 ins., mkd. with 1 notch on E. and 5 notches on W. edges, T6S R28E on N., and T.7S on S. faces, bears S., 4 lks. dist. Destroy all evidence of this corner.

Chains

40.38 (80.00 chs. in departure from the cor. of T.6 S., R.28 E., only) Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for reestablished cor. of secs. 35 and 36, only; with brass cap mkd.

T6S R28E

S35 S36

T7SR28E

1931

No bearing trees available; raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Land: rolling.

Soil: gravelly, 2nd rate.

Undergrowth: sage, greasewood, cactus and mesquite.

N.89°55'W., on true line, on S. bdy. of sec. 35.

Over gradual S. slope; through scattering brush; desc. 20 ft.

3.30 Wash, 80 lks. wide, course S.; asc. 94 ft.

5.74 (80.00 chs. in departure W. from the closing cor. of T.7 S., Rs. 28 and 29 E.) Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bedrock; deposit a stone, mkd. with cross (+) at base; raise a mound of stone around post to top, for reestablished cor. of secs. 1 and 2 only, with brass cap mkd.

T6S R28E

S35

S2 S1

T7S R28E

1931

No bearing trees are available.

22.60 Spur, slopes S.60°E.; desc. 24 ft.

26.30 Draw, course S.60°E.; asc. 61 ft.

31.80 Spur, slopes S.30°E.

33.70 Head of draw, course S.70°W.

38.90 Spur, slopes S.; desc. 55 ft.

39.90 The original 1/4 sec. cor. of secs. 2 and 35, a malpais stone, 8 x 8 x 10 ins. above ground, mkd. 1/4 on N. face, bears North, 4 lks. dist. Destroy all evidence of this corner.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 35, only, with brass cap mkd.

S35

1931

No bearing trees available; raise a mound of stone, 3 ft. base, 1 1/2 ft. high, N. of cor.

45.12 Wash, 30 lks. wide, course S.20°W.

45.74 (40.00 chs. in departure W. from the reestablished cor. of secs. 1 and 2): Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 2, only, with brass cap mkd.

S2

1931

No bearing trees available; raise a mound of stone, 3 ft.


Resurvey of the South boundary of T. 6 S., R. 28 E.

Chains

- base, 1 1/2 ft. high, S. of cor.
- 53.40 Dim road, brs. N.10°E., and S. 10 W.
- 55.40 Wash, 40 lks. wide, course S.30°E., asc. 85 ft.
- 66.20 Gulch, S. 20°E
- 73.10 Spur, slopes S., desc. 64 ft.
- 79.30 Draw, S.20°E.,
- 79.92 The original cor. of secs. 2, 3, 34 and 35, a malpais stone, 8 x 14 x 20 ins. above ground, marked with 2 notches on E. and 4 notches on W. edge; T6S R28E on N., T7S on S. face. Destroy all evidence of this old cor.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for reestablished cor. of secs. 34 and 35 only, with brass cap marked

T6S R28E  
 S34 | S35  
 T7S R28E  
 S2  
 1931

No bearing trees available; raise a mound of stone, 3 ft. base, 1 1/2 ft. high, N. of cor.  
 Land, rolling hills.  
 Soil, gravelly loam; 2nd rate.  
 Undergrowth, greasewood mesquite and sage.



- N.89°55'W., on true line, on S. bdy. of sec. 34.
- Over SE. slope, through scattering brush, asc. 37 ft.
- 2.10 Spur, slopes S.10°E., desc. 35 ft.
- 4.90 Draw, course S.50°W., asc. 59 ft.
- 5.74 (80 chs. in departure W. from the reestablished cor. of secs. 1 and 2.) Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in the ground, to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1 1/2 ft. high, around post, for reestablished cor. of secs. 2 and 3 only, with brass cap marked

T6S R28E  
 S34  
 T7S | R28E  
 S3 | S2  
 1931

- No bearing trees available.
- 7.90 Spur, slopes S., desc. 100 ft.
- 19.20 Draw, course S.20°W., asc. 52 ft.
- 23.90 Toe of spur, sloping S., desc. 45 ft.
- 26.90 Draw, course S.10°W., asc. 45 ft.
- 31.20 Spur, slopes S., desc. 63 ft.
- 34.70 Draw, course S.40°W., asc. 11 ft.
- 39.39 The original 1/4 sec. cor. of secs. 3 and 34, a malpais stone, 6 x 8 x 6 ins. above ground, marked 1/4 on N. face, brs. south, 3 lks. dist. Destroy all evidence of this old cor.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground, to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1 1/2 ft. high, around post, for reestablished 1/4 sec. cor. of sec. 34 only, with brass cap marked

1/4 S34  
 1931

- No bearing trees available;
- 40.70 Toe of spur, sloping S., desc. 52 ft.

Resurvey of the South boundary of T. 6 S., R. 28 E.

Chains

44.40  
45.74

Draw, course S., asc. 91 ft.  
(40 chs. in departure W. from the reestablished cor. of secs. 2 and 3.) Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground, to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, around post, for reestablished  $\frac{1}{4}$  sec. cor. of sec. 3 only, with brass cap marked

$\frac{1}{4}$  S3  
1931

53.40  
57.10  
61.10  
70.70  
76.12  
76.56

No bearing trees available.  
Spur, slopes S., desc. 80 ft.  
Draw, course S., asc. 58 ft.  
Spur, slopes S., desc. 100 ft.  
Low spur, slopes S., desc. 50 ft.  
Draw, course S., asc. 24 ft.  
The original cor. of secs. 3, 4, 33 and 34, a malpais stone, 6 x 8 x 8 ins. above ground, marked with 3 notches on E., and 3 notches on W. edge; T6S R28E on N., and T7S on S. face, brs. S. 2 lks. dist. Destroy all evidence of this old cor.

80.00

Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for reestablished cor. of secs. 33 and 34 only, with brass cap marked

T6S R28E  
S33 | S34  
-----  
T7S R28E  
S3  
1931

No bearing trees available; raise a mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.  
Land, rolling hills.  
Soil, gravelly loam; 3 rd rate.  
Undergrowth, greasewood, mesquite and and sage.

0.70  
2.60  
5.74

N. ~~89°55'~~ W., on true line, on S. bdy. of sec. 33.  
Over SW. slope, through scattering brush, desc. 20 ft.  
Draw, course S., asc. 20 ft.  
Flat spur, slopes S., desc. 67 ft.  
(80 chs. in departure W., from reestablished cor. of secs. 2 and 3.) Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for reestablished cor. of secs. 3 and 4 only, with brass cap marked

T6S R28E  
S33  
-----  
S4 | S3  
T7S R28E  
1931

11.60  
17.40  
24.90  
28.60  
32.50  
39.38

No bearing trees available; raise a mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, S. of cor.  
Draw, course S. 20° W., asc. 55 ft.  
Ridge, brs. N. 50° E., and S. 50° W., thence along N. slope.  
Same ridge, brs. W.  
Leave ridge, bearing S. 40° W., desc. 80 ft.  
Head of draw, course N., asc. 66 ft.  
The original  $\frac{1}{4}$  sec. cor. of secs. 4 and 33, a malpais stone, 8 x 10 x 6 ins. above ground, marked  $\frac{1}{4}$  on N. face, brs. 3 lks. S. Destroy all evidence of this old cor.

39.90

Ridge, previously mentioned, brs. N. 80° W. and S. 80° E.,

Resurvey of the South boundary of T. 6 S., R. 28 E.

Chains

40.00 Thence, over SW. slope, desc. 73 ft.  
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished  $\frac{1}{4}$  sec. cor. of sec. 33 only, with brass cap marked

$\frac{1}{4}$  S33  
-----  
1931

45.74 No bearing trees available; raise a mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.  
(40 chs. in departure W. from reestablished cor. of secs. 3 and 4.) Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 4 ft. base,  $1\frac{1}{2}$  ft. high, around post, for reestablished  $\frac{1}{4}$  sec. cor. of sec. 4 only, with brass cap marked

$\frac{1}{4}$  S 4  
-----  
1931

54.60 No bearing trees available.  
Head of draw, course S., asc. 57 ft.  
56.80 Spur, slopes S., desc. 114 ft.  
61.30 Head of draw, course S., asc. 119 ft.  
64.20 Spur, slopes S. 60° W., desc. 212 ft. over broken W. slope.  
78.80 The original cor. of secs. 4, 5, 32 and 33, a malpais stone, 16 x 14 x 8, marked with 4 notches on E. and 2 notches on W. face; T6S R28E on N., and T7S on S. face, brs. 3 lks. N. Destroy all evidence of this old cor.

79.60 Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for witness cor. to reestablished cor. of secs. 32 and 33 only, with brass cap marked

T6S R28E  
WC S32 | S33  
-----  
T7S R28E  
S4  
1931

80.00 No bearing trees available; raise a mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.  
True point for reestablished cor. of secs. 32 and 33 falls in gulch, course S. 80° W.  
Land, rolling hills.  
Soil, gravelly loam; 3rd rate.  
Undergrowth, greasewood, mesquite and cactus.

5.74 From true point for reestablished cor. of secs. 32 and 33.  
N. 89° 55' W., on a true line, on S. bdy. of E.  $\frac{1}{2}$  of sec. 32. Over SW. slope through scattering brush, desc. slightly.  
(80 chs. in departure W. from the reestablished cor. of secs. 3 and 4.) Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for reestablished cor. of secs. 4 and 5 only, with brass cap marked

T6S R28E  
S32  
-----  
S5 | S4  
T7S R28E  
1931

No bearing trees available; raise a mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, S. of cor.

## Resurvey of the South boundary of T. 6 S., R. 28 E.

## Chains

7.30 Draw, course S. 60°W., asc. 36 ft.  
 21.80 Spur, S. 40°W., desc. 76 ft.  
 30.90 Draw, course S. 70°W., asc. 29 ft.  
 38.88 Intersect original  $\frac{1}{4}$  sec. cor. of secs. 5 and 32, a malpais stone, 8 x 6 x 6 ins. above ground, marked  $\frac{1}{4}$  on N. face, and witnessed by a mound of stone, to N. of cor. Reconstruct this cor. to refer to areas to the N. only, as follows:  
 Along side of old stone, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished  $\frac{1}{4}$  sec. cor. of sec. 32 only, with brass cap marked

$\frac{1}{4}$  S32  
 1931

No bearing trees available; rebuild old mound of stone, with 3 ft. base, and  $1\frac{1}{2}$  ft. high, to N.

Thence,

6.86 West, on true line, on W.  $\frac{1}{2}$  of S. bdy. of sec. 32. (40 chs. in departure W. from the reestablished cor. of sec. 4 and 5.) Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for reestablished  $\frac{1}{4}$  sec. cor. of sec. 5 only, with brass cap marked

$\frac{1}{4}$  S 5  
 1931

No bearing trees available; raise a mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, S. of cor.

Desc. 50 ft.

11.30 Draw, course N. 80°W., asc. 15 ft. over NE. slope.

15.70 Slope changes to NW., desc. 63 ft.

19.20 Draw, course S. 20°W., asc. 82 ft.

27.10 Spur, slopes S. 20°W., desc. 81 ft.

40.09 The original cor. of secs. 5, 6, 31 and 32, a granite stone, 8 x 8 x 10 ins. above ground, set in a mound of stone, marked with 5 notches on E., and 1 notch on W. edge; T6S on N., T7S., on S., and R28E. on W. face. Reconstruct this cor. to refer to areas to the N. only, as follows:

Along side of old stone, in mound, set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground, to bedrock; deposit a stone, marked with a cross (x) at base, raise a mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, around post, for cor. of secs. 31 and 32, sec. 5 only, with brass cap marked

T6S | R28E  
 S31 | S32  
 T7S | R28E  
 S5  
 1931

No bearing trees available.

Land, rolling hills.

Soil, gravelly loam; 3rd rate.

Undergrowth, greasewood, mesquite and cactus.


N89°44'W., on true line, on S. bdy. of sec. 31. of sec. 31. Over SW. slope through low scattering brush, desc. 151 ft.

6.77 (80 chs. in departure W. from the reestablished cor. of secs. 4 and 5.) Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground, to bedrock; deposit


Resurvey of the South boundary of T. 6 S., R. 28E.

Chains

a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1 1/2 ft. high, around post, for reestablished cor. of secs. 5 and 6 only, with brass cap marked




21.16 No bearing trees available.  
 Left bank of Gila River, 3 ft. high, brs. SW and NE. At this point,  
 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for meander cor. of secs. 6 and 31, with brass cap marked




from which


24.17 A mesquite tree, 8 ins. in diam., brs. S. 27° 30' E., 167 lks. dist., marked T7S R28E S6 MC BT.  
 A mesquite tree, 10 ins. in diam., brs. N. 67° E., 112 lks. dist., marked T6S R28E S31 MC BT.  
 Right bank of Gila River, 4 ft. high, brs. SW. and NE.,  
 At this point,  
 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for meander cor. of secs. 6 and 31, with brass cap marked



40.08 No bearing trees available; raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.  
 Thence over level bottom land, through scattering timber and brush.  
 (Proportional dist., bet. the original cor. of secs. 5, 6, 31 and 32, Tps. 6 and 7 S., R. 28 E., and the re-established cor. of Tps. 6 and 7 S., Rs. 27 and 28 E.)  
 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 31 only, with brass cap marked



41.96 No bearing trees available; raise a mound of stone, 3 ft. base, 1 1/2 ft. high, N. of cor.  
 Right bank of Gila River, 4 ft. high, brs. NW. and SE., at this point,  
 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for meander cor. of secs. 6 and 31, with brass cap marked



Resurvey of the South boundary of T. 6 S., R. 28 E.

Chains

65.46

No bearing trees available; raise a mound of stone, 3 ft. base, 1½ ft. high, E. of cor.  
 Thence, on blank line, over bed of river.  
 Right bank of river, 3 ft. high, brs. SW. and NE., at this point,  
 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for meander cor. of secs. 6 and 31, with brass cap marked

T6S  
 S31  
 R28E S6 MC

T7S  
 1931

78.26


No bearing trees available; raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.  
 Thence, continue over level bottom land, through brush.  
 The reestablished cor. of Tps. 6 and 7 S., Rs. 27 and 28 E., hereinbefore described.  
 Land, rolling hills and river bottom.  
 Soil, gravelly and sandy loam.  
 Timber, cottonwood and mesquite.  
 Undergrowth, willow, greasewood, ocotillo and cactus.



Survey of the East boundary of T. 7 S., R. 28 E.


Chains

From original cor. of Tps. 7 and 8 S., Rs. 28 and 29 E., which is an iron post, 3 ins. in diam., 18 ins. in the ground, supported by a mound of stone; witnessed by a mound of stone, 4 ft. base, 2 ft. high, to S., with brass cap marked



29.80 North, on true line, on E. bdy. of sec. 36. Over gradual NW. slope; through low brush, desc. 20 ft. Wash, 120 lks. wide, course W., asc. 270 ft. over SE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in in the ground, to bedrock; deposit a stone, marked with a cross (X) at base; and raise a mound of stone, 5 ft. base, 2 ft. high; around post, for 1/4 sec. cor. of sec. 36 only, with brass cap marked




49.80 No bearing trees available. E. side of pinnacle rock, on spur sloping S. 45° W., desc. 200 ft. over NW. slope.

59.30 Ridge, brs. N. 50° E. and S. 50° W.

74.80 Draw, course S. 60° W., asc. 69 ft.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in the ground, to bedrock; deposit a stone, marked with a cross (X) at base, and raise a mound of stone, 4 ft. base, 2 ft. high, around post, for cor. of secs. 25 and 36 only, with brass cap marked



No bearing trees available.

Land, rolling hills;

Soil, rocky; 3 rd rate.


Timber, palo verde

Undergrowth, cactus, ocotilla and Spanish dagger.

13.30 North, on true line, on E. bdy. of sec. 25. Over rocky SE. slope, asc. 256 ft.

33.30 Spur, slopes W., desc. 287 ft.

40.00 Wash, 20 lks. wide, course N. 70° W., thence along W. slope. Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground, to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound, of stone, 3 ft. base, 1 1/2 ft. high, around post, for 1/4 sec. cor. of sec. 25 only, with brass cap marked



Survey of the East boundary of T. 7 S., R. 28 E.

Chains

No bearing trees available.  
 Desc. 42 ft. over gradual NW. slope.  
 58.90 Wash, 40 lks. wide, course W.  
 66.40 Telephone line, brs. N.85°W., and S.85°E.  
 73.20 Drain, course W., asc. 51 ft.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground, to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1½ ft. high, around post, for cor. of secs. 24 and 25 only, with brass cap marked

T7S  
 S24  
 S25  
 R28E  
 1931

No bearing trees available.  
 Land, rolling hills.  
 Soil, rocky; 3rd rate.  
 Undergrowth, cactus, greasewood ocotilla and mesquite.

North, on true line, on E. bdy. of sec. 24.  
 Over SW. slope, through low brush, asc. 29 ft.  
 9.50 Spur, slopes W., desc. 52 ft.  
 13.00 U. S. Highway No. 180, brs. N80°E. and S.80°W.  
 15.00 Draw, course W., asc. 98 ft.  
 28.60 Spur, slopes W., desc. 98 ft.  
 39.90 Draw, course S.70°W., asc. 64 ft.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground, to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 5 ft. base, 2½ ft. high, around post, for ¼ sec. cor. of sec. 24 only, with brass cap marked

¼  
 S24  
 1931

No bearing trees available.  
 46.00 Spur, slopes S.80°W., desc. 57 ft.  
 51.10 Draw, course S. 80°W., asc. 64 ft.  
 58.80 Spur, slopes W., desc. 103 ft.  
 67.80 Draw, course W., asc. 23 ft.  
 73.10 Low saddle in spur, sloping W., desc. 23 ft.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground, for cor. of secs. 13 and 24 only, with brass cap marked


T7S  
 S13  
 S24  
 R28E  
 1931

No bearing trees available; raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.  
 Land, rolling hills  
 Soil, gravelly loam; 3 rd rate.  
 Undergrowth, greasewood, mesquite and cactus.


Survey of the East boundary of T. 7 S. R. 28 E.

Chains

North, on true line, on E. bdy. of sec. 13.  
 Over NW. slope, through low brush, desc. 11 ft.  
 5.00 Draw, course W., asc. 45 ft.  
 19.60 Spur, slopes S. 60°W., desc. 57 ft.  
 33.00 Draw, course S. 80°W., asc. 17 ft.  
 40.00 On low spur sloping W., set an iron post, 3 ft. long, 1  
 in. in diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of  
 sec. 13 only, with brass cap marked




No bearing trees available; raise a mound of stone, 3 ft.  
 base, 1 1/2 ft. high, W. of cor.  
 Desc, 34 ft.  
 56.90 Draw, course S. 70°W., thence along gradual W. slope.  
 74.30 Drain, course W., asc. 123 ft.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in  
 the ground, to bedrock; deposit a stone, marked with  
 a cross (x) at base, and raise a mound of stone, 6 ft.  
 base, 2 ft. high, around post, for cor. of secs. 12  
 and 13 only, with brass cap marked



No bearing trees available;  
 Land; rolling hills.  
 Soil; gravelly loam; 3rd rate.  
 Undergrowth, greasewood, mesquite and cactus.

North, on true line, on E. bdy. of sec. 12  
 Over SW. slope, through scattering low brush, asc. 168  
 ft.  
 9.20 Spur, S. 70°W., desc. 184 ft.  
 18.00 Foot of NW. slope, thence over level mesa land.  
 24.30 Wash, 30 lks. wide, course W.  
 32.50 Wash, 60 lks. wide, course S. 70°W.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground, for  $\frac{1}{4}$  sec. cor. of sec. 12 only, with brass  
 cap marked



No bearing trees available; raise a mound of stone, 3 ft.  
 base, 1 1/2 ft. high, W. of cor.  
 41.80 State Highway, No. 71, brs. N. 50°E. and S. 50°W.  
 42.30 Telephone line, brs. N. 50°E. and S. 50°W.  
 71.10 Desc. 29 ft. over N. slope.  
 73.80 Foot of slope, thence, over level ground  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in  
 the ground, for cor. of secs. 1 and 12 only, with brass  
 cap marked


Survey of the East boundary of T. 7 S., R. 28 E.

Chains

T7S.  
S1  
S12  
R28E  
1931

No bearing trees available; raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.

Land, slightly rolling  
Soil, gravelly loam; 3rd rate.  
Undergrowth, greasewood, mesquite and cactus.



North, on true line, on E. bdy. of sec. 1.  
Over gradual NW. slope, through low brush, desc. 50 ft.

22.50 Wash, 2 chs. wide, course N. 45° W.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for 1/4 sec. cor. of sec. 1 only, with brass cap marked

S1

1931

No bearing trees available; raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.

49.60 Wash, 30 lks. wide, course N. 80° W.

62.30 Wash, 20 lks. wide, course W.

68.90 Small drain, course west, asc. 51 ft. over S. slope.

78.36 Intersect S. bdy. of sec. 36, Tp. 6 S., R. 28 E., at 5.74 chs. N. 89° 55' W. from SE cor. of said Tp. At this point of intersection, establish a closing cor. of Tp. 7 S., Rs. 28 and 29 E., as follows:

Set an iron post, 3 ft. long, 3 ins. in diam., 28 ins. in the ground, for closing cor. of Tp. 7 S., Rs. 28 and 29 E., with brass cap marked

T6S R28E  
S36


S1  
R28E R29E

T7S

CG  
1931

No bearing trees available; raise a mound of stone, 4 ft. base, 2 ft. high, S. of cor.


Land, rolling  
Soil, gravelly loam; 3rd rate.  
Undergrowth, greasewood, cactus and mesquite



Survey of subdivisions, T. 7 S., R. 28 E.

Chains

From original cor. of secs. 1, 2, 35 and 36, Tps. 7 and 8 S., R. 28 E., which is an iron post, 3 ins. in diam., 12 ins. above ground, witnessed by a mound of stone, to W., with brass cap marked




2.40 N.0°01'W., on true line bet. secs. 35 and 36. Over slightly rolling ground, through low brush. Old abandoned Safford and Duncan road, brs. N.15°W. and S. 85°E.

12.40 Wash, 2 chs. wide, course N.80°W.

34.50 Foot of S. slope, asc. 130 ft.


40.00 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground, to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 5 ft. base, 2 ft. high, around post, for 1/4 sec. cor. of secs. 35 and 36, with brass cap marked



46.00 No bearing trees available; Asc. 162 ft. over S. slope. Ridge, brs. N.80°W. and S. 80°E., desc. 292 ft. over NE. slope.

62.60 Wash, 20 lks. wide, course W., thence along gradual W. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, with brass cap marked



No bearing trees available; raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling and mountainous. Soil, gravelly loam; rocky; 2nd and 4th rate. Undergrowth, greasewood, cactus and mesquite.

40.00 East, on random line, bet. secs. 25 and 36. Set temp. 1/4 sec. cor.

80.07 Fall 23 lks. N. of the cor. of secs. 25 and 36., hereinbefore described.

Thence, N.89°50'W., on true line, bet. secs. 25 and 36. Over SE. slope, through low brush, asc. 35 ft:

5.50 Thence along S. slope.

10.10 Small spur, slopes S. 60°W., desc. 167 ft.

29.10 Draw, course S. 60°W., thence along, gradual S. slope.

40.03 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground, to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 5 ft. base, 2 ft. high, around post, for 1/4 sec. cor. of secs. 25 and 36, with brass cap marked

Survey of subdivisions, T. 7 S., R. 28 E

Chains

$$\begin{array}{r} \frac{1}{4} \text{ S } 25 \\ \hline \text{S } 36 \\ 1931 \end{array}$$

No bearing trees available.  
 Asc. 95 ft. over SE. slope.  
 57.00 Thence, over SW. slope, desc. 229 ft.  
 80.07 The cor. of secs. 25, 26, 35 and 36.

Land, rolling hills  
 Soil, gravelly loam; 2nd and 3rd rate.  
 Undergrowth, palo verde, ocotilla and Spanish dagger.

21.50 N.0°01'W. on true line, bet. secs. 25 and 26.  
 Over gradual SW. slope, through low brush, asc. 186 ft.  
 32.60 Spur, slopes S.70°W., desc. 167 ft.  
 40.00 Bottom of swale, course W., asc. 25 ft.  
 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in  
 the ground to bedrock; deposit a stone, marked with a  
 cross (x) at base, and raise a mound of stone, 5 ft.  
 base, 2½ ft. high, around post, for ¼ sec. cor. of secs.  
 25 and 26, with brass cap marked

$$\begin{array}{r} \frac{1}{4} \\ \hline \text{S26} | \text{S25} \\ 1931 \end{array}$$

No bearing trees available.  
 Thence, over level land.  
 47.30 Wash, course S.40°W. (30 lks. wide)  
 74.50 Telephone line, brs. E. and W.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in  
 the ground, for cor. of secs. 23, 24, 25 and 26, with  
 brass cap marked

$$\begin{array}{r} \text{T7S R28E} \\ \hline \text{S23} | \text{S24} \\ \hline \text{S26} | \text{S25} \\ 1931 \end{array}$$

No bearing trees available; raise a mound of stone, 3 ft.  
 base, 1½ ft. high, W. of cor.

Land, slightly rolling.  
 Soil, gravelly loam; 2nd rate.  
 Undergrowth, greasewood, ocotillo and mesquite.

40.00 East, on a random line, bet. secs. 24 and 25.  
 80.05 Set temp. ¼ sec. cor.  
 Fall 23 lks. N. of the cor. of secs. 24 and 25, herein-  
 before described.

Thence,  
 N.89°50'W., on true line, bet. secs. 24 and 25.  
 Over gradual SW. slope, through low brush, desc. 96 ft.  
 37.70 Wash, 20 lks. wide, course N.80°W.  
 40.02 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in  
 the ground, for ¼ sec. cor. of secs. 24 and 25, with  
 brass cap marked

$$\begin{array}{r} \frac{1}{4} \text{ S24} \\ \hline \text{S25} \\ 1931 \end{array}$$


Survey of subdivisions, T. 7 S., R. 28 E.

Chains

No bearing trees available; raise a mound of stone, 3 ft. base, 1 1/2 ft. high, N. of cor.  
 52.30 Old road, brs. N.10°W. and S. 10°E.  
 66.50 Wash, 20 lks. wide, course N.40°W.  
 80.05 The cor. of secs. 23, 24, 25 and 26.

Land, level  
 Soil, gravelly loam; 2nd rate.  
 Undergrowth, greasewood, sotilla and mesquite.

N.0°01'W., on true line, bet. secs. 23 and 24.  
 Over level ground, through low brush.  
 12.10 Wash, 50 lks. wide, course N.70°W.  
 16.90 Wash, 40 lks. wide, course S.60°W.  
 34.40 Wash, 15 lks. wide, course W.  
 36.50 U. S. Highway No. 180 brs. N.80°W. and S. 80°E.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for 1/4 sec. cor. of secs. 23 and 24, with brass cap marked




No bearing trees available; raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.  
 57.30 Wash, 50 lks. wide, course west.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground, for cor. of secs. 13, 14, 23 and 24, with brass cap marked



No bearing trees available; raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.  
 Land, level  
 Soil, gravelly loam; 2nd rate.  
 Undergrowth, greasewood, cactus and mesquite.

East, on a random line, bet. secs. 13 and 24.  
 40.00 Set temp. 1/4 sec. cor.  
 80.12 Fall 16 lks. N. of the cor. of secs. 13 and 24, hereinbefore described, thence,  
 N.89°53'W., on true line, bet. secs. 13 and 24.  
 Over slightly rolling ground, through low brush, desc. slightly.  
 6.10 Drain, course N.40°W., asc. 63 ft.  
 9.50 Spur, slopes N.45°W., desc. 81 ft. over W. slope.  
 15.10 Foot of slope, thence over level ground.  
 40.06 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for 1/4 sec. cor. of secs. 13 and 24, with brass cap marked



No bearing trees available; raise a mound of stone, 3 ft. base, 1 1/2 ft. high, N. of cor.  
 80.12 The cor. of secs. 13, 14, 23 and 24.

Survey of subdivisions, T. 7 S., R. 28 E.

Chains

Land, slightly rolling.  
Soil, gravelly loam; 2nd rate.  
Undergrowth, greasewood, ocotilla, cactus and mesquite.

11.90 N.0°01'W. on true line, bet. secs. 13 and 14.  
40.00 Over slightly rolling ground, through low brush.  
Wash, 60 lks. wide, course S. 70°W.

Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground; to bedrock; deposit a stone marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1½ ft. high, around post, for ¼ sec. cor. of secs. 13 and 14, with brass cap marked

¼  
S14 | S13  
1931

46.50 Wash, 15 lks. wide, course S. 45°W.

79.60 State Highway No. 71, brs. N. 65°E. and S. 65°W.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 11, 12, 13 and 14, with brass cap marked

T7S R28E  
S11 | S12  
S14 | S13  
1931

No bearing trees available; raise a mound of stone, 3 ft. base, 2 ft. high, W of cor.

Land, level  
Soil, gravelly loam; 2nd rate.  
Undergrowth, greasewood, cactus and mesquite.

40.00 East, on a random line, bet. secs. 12 and 13.

80.14 Set temp. ¼ sec. cor.

Fall 12 lks. N. of the cor. of secs. 12 and 13, hereinbefore described,

Thence, N. 89°55'W., on true line bet. secs. 12 and 13.

Over rocky SW. slope, desc. 83 ft.

10.10 Wash, 5 lks. wide, course S. 15°W., thence over level ground, through low desert shrubbery.

40.07 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground, to bedrock; deposit a stone marked with a cross (x), at base, and raise a mound of stone, 3 ft. base, 1½ ft. high, around post, for ¼ sec. cor. of secs. 12 and 13, with brass cap marked

¼ S12  
S13  
1931

No bearing trees available.

78.10 State Highway No. 71, brs. N. 75°E. and S. 75°W.

80.14 The cor. of secs. 11, 12, 13 and 14.


Land, level.  
Soil, gravelly loam; 2nd rate.  
Undergrowth, greasewood, mesquite and cactus.



Survey of subdivisions, T. 7 S., R. 28 E.

Chains

N.0°01'W., on true line, bet. secs. 11 and 12.  
 Over level ground, through low desert shrubbery.  
 0.30 Telephone line, brs. S. 75°W. and N. 75°E.  
 8.00 Wash, 40 lks. wide, course W.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in  
 the ground, to bedrock; deposit a stone, marked with  
 a cross (x) at base, and raise a mound of stone, 3 ft.  
 base, 1½ ft. high, around post, for ¼ sec. cor. of secs.  
 11 and 12, with brass cap marked




No bearing trees available.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in  
 the ground to bedrock; deposit a stone, marked with a  
 cross (x) at base, and raise a mound of stone, 5 ft.  
 base, 2 ft. high, around post, for cor. of secs. 1, 2,  
 11 and 12, with brass cap marked



No bearing trees available.  
 Land, level.  
 Soil, gravelly loam.  
 Undergrowth, greasewood, mesquite and cactus.

-----  
1931

East, on a random line, bet. secs. 1 and 12.  
 40.00 Set temp. ¼ sec. cor.  
 80.00 Fall 23 lks. N. of the cor. of secs. 1 and 12 hereinbefore described.  
 Thence,  
 N. 89°50'W., on true line, bet. secs. 1 and 12.  
 Over level ground, through low desert shrubbery.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in  
 the ground to bedrock; deposit a stone marked with a  
 cross (x) at base, and raise a mound of stone, 3 ft.  
 base, 1½ ft. high, around post, for ¼ sec. cor. of secs.  
 1 and 12, with brass cap marked




No bearing trees available.  
 80.00 The cor. of secs. 1, 2, 11 and 12.  
 Land, level.  
 Soil, gravelly loam; 2nd rate.  
 Undergrowth, greasewood; mesquite and cactus.

North, on a random line, bet. secs. 1 and 2  
 40.00 Set temp. ¼ sec. cor.  
 78.16 Fall 5 lks. E. of the cor. of secs. 1 and 2, hereinbefore described,  
 Thence,  
 S. 0°02'E., on true line, bet. secs. 1 and 2.

Survey of subdivisions, T. 7 S., R. 28 E.


Chains

- Over gradual S.E. slope, through low desert shrubbery, desc. 50 ft.
- 27.20 Bend in wash, from N.10°E. to S.45°W., thence over level ground.
- 29.20 Previously mentioned wash, course S. 15°E.
- 34.70 Same wash, 20 lks. wide, course S.40°W.
- 37.40 Dry wash, 80 lks. wide, course S.75°W.
- 38.16 Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 1 and 2, with brass cap marked



- No bearing trees available; raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
- 58.76 Wash, 30 lks. wide, course S.60°W.
- 78.16 The cor. of secs. 1, 2, 11 and 12.  
Land, level.  
Soil, gravelly loam, 2nd rate.  
Undergrowth, greasewood, sage, mesquite and cactus.


-----  
From the original cor. of secs. secs. 2, 3, 34 and 35, which is an iron post, 3 ins. in diam., 12 ins. above ground, witnessed by a mound of stone, 3 ft. base, 1 1/2 ft. high, to W., with brass cap marked




- N.0°01'W., on true line bet. secs. 34 and 35.
- Over level ground, through desert shrubbery.
- 27.20 Old abandoned Safford and Duncan road, brs. N.85°W. and S.85°E.
- 30.00 U.S.G.S. bench mark, which is an iron post, 3 ins. in diam., 16 ins. above ground, brs. S.81°27'W., 8.04 chs. dist. Brass cap on post is marked as follows:

ELEVATION  
ABOVE SEA  
3481 FEET  
DATUM PHNX

- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 34 and 35, with brass cap marked



- No bearing trees available; raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.
- 48.50 Wash, 20 lks. wide, course W.
- 58.50 Wash, 30 lks. wide, course N.80°W.
- 71.70 Wash, 30 lks. wide, course N.80°W.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 26, 27, 34 and 35, with brass cap marked



Survey of subdivisions, T. 7 S., R. 28 E.

Chains

No bearing trees available; raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.

Land, level.  
Soil, gravelly loam; 2nd rate.  
Undergrowth, greasewood, mesquite and cactus.

-----  
East, on a random line, bet. secs. 26 and 35.  
40.00 Set temp. 1/4 sec. cor.  
80.19 Fall 16 lks. S. of the cor. of secs. 25, 26, 35 and 36, Thence,  
S. 89° 53' W., on true line bet. secs. 26 and 35.  
Over level ground, through low desert shrubbery.  
40.09 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 4 ft. base, 2 ft. high, around post, for 1/4 sec. cor. of secs. 26 and 35, with brass cap marked

1/4 S26  
S35  
1931

No bearing trees available.  
56.30 Wash, 30 lks. wide, course S. 50° W.  
74.90 Wash, 40 lks. wide, course N. 60° W.  
80.19 The cor. of secs. 26, 27, 34 and 35.

Land, level.  
Soil, gravelly loam; 2nd rate.  
Undergrowth, greasewood, mesquite, Spanish dagger and sage.

-----  
N. 0° 01' W., on true line bet. secs. 26 and 27.  
Over level land, through low desert shrubbery.  
4.00 Wash, 50 lks. wide, course W.  
25.30 Old road, brs. E. and W.  
35.00 Wash, 15 lks. wide, course W.  
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor. of secs. 26 and 27, with brass cap marked

1/4  
S27 | S26  
1931

No bearing trees available; raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.  
42.80 Wash, 40 lks. wide, course S. 30° W.  
54.80 Wash, 30 lks. wide, course S. 60° W.  
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for cor. of secs. 22, 23, 26 and 27, with brass cap marked

T7S R28E  
S22 | S23  
S27 | S26  
1931

No bearing trees available; raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.

## Survey of subdivisions, T. 7 S., R. 28 E.

## Chains

Land, level.  
Soil, gravelly loam; 2nd rate.  
Undergrowth, greasewood, mesquite and cactus.

-----

East, on a random line, bet. secs. 23 and 26.  
40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
80.24 Fall 7 lks. S. of the cor. of secs. 23, 24, 25, and 26.  
Thence,  
S.  $89^{\circ}57'W.$ , on true line bet. secs. 23 and 26.  
Over level ground, through low desert shrubbery.  
40.12 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in  
in the ground, to bedrock; deposit a stone, marked  
with a cross (x) at base, and raise a mound of stone,  
3 ft. base,  $1\frac{1}{2}$  ft. high, around post, for  $\frac{1}{4}$  sec. cor.  
of secs. 23 and 26, with brass cap marked

$$\frac{1}{4} \begin{array}{c} S23 \\ \hline S26 \\ 1931 \end{array}$$

No bearing trees available.  
50.70 Telephone line, brs. N  $85^{\circ}W.$  and S.  $85^{\circ}E.$   
63.74 Wash, 20 lks. wide, course N.  $70^{\circ}W.$   
80.24 The cor. of secs. 22, 23, 26 and 27.

Land, level.  
Soil, gravelly loam; 2nd rate.  
Undergrowth, greasewood, mesquite and cactus.

-----

N.  $0^{\circ}01'W.$  on true line bet. secs. 22 and 23.  
Over level ground, through low desert shrubbery.  
3.00 Telephone line, brs. N.  $85^{\circ}W.$  and S.  $85^{\circ}E.$   
12.60 Wash, 30 lks. wide, course N.  $80^{\circ}W.$   
15.30 Dim road, brs. N.  $70^{\circ}E.$  and S.  $70^{\circ}W.$   
18.00 Wash, 20 lks. wide, course S.  $70^{\circ}W.$   
25.00 Foot of S. slope, asc. 51 ft.  
37.50 Top of small hill, desc. 50 ft.  
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in  
the ground to bedrock; deposit a stone, marked with  
a cross (x) at base, and raise a mound of stone, 3 ft.  
base,  $1\frac{1}{2}$  ft. high, around post, for  $\frac{1}{4}$  sec. cor. of secs.  
22 and 23 with brass cap marked

$$\frac{1}{4} \begin{array}{c} S22 | S23 \\ \hline 1931 \end{array}$$

No bearing trees available.  
Desc. 17 ft..  
43.30 Wash, 20 lks. wide, course W.  
47.20 Wash, 40 lks. wide, course S.  $70^{\circ}W.$   
49.30 Wash, 50 lks. wide, course S.  $60^{\circ}W.$   
52.20 Dim road, brs. N.  $60^{\circ}E.$  and S.  $60^{\circ}W.$   
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in  
the ground, for cor. of secs. 14, 15, 22 and 23, with  
brass cap marked

$$\begin{array}{c} T7S | R28E \\ S15 | S14 \\ \hline S22 | S23 \\ 1931 \end{array}$$

No bearing trees available; raise a mound of stone, 3 ft.

Survey of subdivisions, T. 7 S., R. 28 E.


Chains

base, 1 1/2 ft. high, W. of cor. Land, level. Soil, gravelly loam; 2nd rate. Undergrowth, greasewood, mesquite and cactus.

40.00 East, on random line, bet. secs. 14 and 23. Set temp. 1/4 sec. cor. 80.14 Fall 9 lks. S. of the cor. of secs. 13, 14, 23 and 24.

Thence S. 89° 56' W., on true line, bet. secs. 14 and 23. Over level ground, through low desert shrubbery.


17.50 Wash, 40 lks. wide, course S. 45° W. 40:07 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground, to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 5 ft. base, 2 1/2 ft. high, around post, for 1/4 sec. cor. of secs. 14 and 23, with brass cap marked




43.80 No bearing trees available. Wash, 10 lks. wide, course S. 78.80 U. S. Highway, No. 180, brs. N. 65° W. and S. 65° E. 80.14 The cor. of secs. 14, 15, 22 and 23.

Land, level. Soil, gravelly loam; 2nd rate. Undergrowth, greasewood, mesquite, cactus and sage.

N. 0° 01' W., on true line bet. secs. 14 and 15. Over level ground, through low desert shrubbery. 1.10 U.S. Highway No. 180, brs. N. 65° W. and S. 65° E. 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor. of secs. 14 and 15, with brass cap marked



No bearing trees available; raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor. 59.10 Telephone line, brs. N. 85° E. and S. 85° W. 64.80 Safford Clifton road, (State Highway No. 71); brs. N. 80° E. and S. 80° W. 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1 1/2 ft. high, around post, for cor. of secs. 10, 11, 14 and 15, with brass cap marked



No bearing trees available;

Survey of subdivisions, T. 7 S., R. 28 E.

Chains

Land, level  
Soil, gravelly; loam; 2nd rate.  
Undergrowth, greasewood, mesquite, cactus and sage.

-----  
East, on a random line, bet. secs. 11 and 14.

40.00

Set temp.  $\frac{1}{4}$  sec. cor.

80.16

Fall 14 lks. S. of the cor. of secs. 11, 12, 13 and 14.

Thence,

S. 89° 54' W., on true line, bet. secs. 11 and 14.


Over level ground, through low desert shrubbery.

2.00

Telephone line, brs. NE. and SW.

40.08

Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, around post, for  $\frac{1}{4}$  sec. cor. of secs. 11 and 14, with brass cap marked



1931

80.16

No bearing trees available.  
The cor. of secs. 10, 11, 14 and 15.

Land, level  
Soil, gravelly loam; 2nd rate.  
Undergrowth, greasewood, mesquite, cactus and sage.

-----  
N. 0° 01' W., on true line, bet. secs. 10 and 11.  
Over gradual SW. slope, through low desert shrubbery, asc. slightly.

5.50

Enter wash, course W.

10.80


Leave wash, course W.

32.70

Drain, N. 80° W.

40.00

Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 10 and 11, with brass cap marked



1931

No bearing trees available; raise a mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

44.80

Wash, 60 lks. wide, course S. 80° W.

48.80

Wash, 100 lks. wide, course W.

51.80

Dim road, brs. E. and W.

54.10

Wash, 10 lks. wide, course S. 40° W.

59.00


Old road, brs. E. and W.

76.50

Wash, 40 lks. wide, course S. 50° W.

80.00

Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground, for cor. of secs. 2, 3, 10 and 11, with brass cap marked



1931

No bearing trees available; raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Survey of subdivisions, T. 7 S., R. 28 E.

Chains

Land, slightly rolling.  
Soil, gravelly loam; 2nd rate.  
Undergrowth, greasewood, mesquite, cactus and sage.

40.00 East, on a random line, bet. secs. 2 and 11.  
Set temp.  $\frac{1}{4}$  sec. cor..  
80.24 Fall 16 lks. S. of the cor. of secs. 1, 2, 11 and 12.  
Thence,  
S.  $89^{\circ}53'$  W., on true line bet. secs. 2 and 11.  
Over level ground through low desert shrubbery.  
35.80 Wash, 60 lks. wide, course S.  $10^{\circ}$  W.  
40.12 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor. of secs. 2 and 11, with  
brass cap marked

$\frac{1}{4}$  S 2  
S 11  
1931

No bearing trees available; raise a mound of stone, 3  
ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.  
48.30 Wash, 30 lks. wide, course S.  
49.30 Old road, brs. N. and S., asc. gradually over E. slope.  
60.00 Low spur, slopes S., desc. slightly.  
63.40 Wash, 5 lks. wide, course S., asc. slightly.  
68.00 Low spur, slopes S., desc. slightly.  
75.30 Wash, 25 lks. wide, course S.  
80.24 The cor. of secs. 2, 3, 10 and 11.

Land, slightly rolling.  
Soil, gravelly loam; 2nd rate.  
Undergrowth, greasewood, mesquite and cactus.

40.00 North, on a random line, bet. secs. 2 and 3.  
Set temp.  $\frac{1}{4}$  sec. cor.  
78.32 Fall 28 lks. W. of the cor. of secs. 2 and 3, herein-  
before described.  
Thence,  
S.  $0^{\circ}12'$  W., on true line bet. secs. 2 and 3.  
Over NE. slope, through low desert shrubbery, asc. 23 ft.  
5.40 Spur, slopes S.  $45^{\circ}$  E., desc. 82 ft.  
14.50 Draw, course S.  $30^{\circ}$  E., thence along E. slope.  
27.70 Spur, slopes S.  $30^{\circ}$  E., desc. 40 ft.  
30.60 Head of draw, course S.  $20^{\circ}$  E., thence along E. slope.  
38.32 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in  
the ground to bedrock; deposit a stone, marked with a  
cross (x) at base, and raise a mound of stone, 3 ft.  
base,  $1\frac{1}{2}$  ft. high, around post, for  $\frac{1}{4}$  sec. cor. of secs.  
2 and 3, with brass cap marked

$\frac{1}{4}$   
S 3 | S 2  
1931

No bearing trees available.  
42.60 Spur, slopes S.  $20^{\circ}$  E., desc. over broken S. slope, 141 ft.  
54.40 Draw, course S.  $10^{\circ}$  W.  
58.50 Same draw, course S.  $10^{\circ}$  E.  
61.90 Same draw, course S.  $20^{\circ}$  W.  
76.00 Drain, course S.  $30^{\circ}$  W.  
78.32 The cor. of secs. 2, 3, 10 and 11.

Survey of subdivisions, T. 7 S., R. 28 E.

Chains

Land, slightly rolling.  
Soil, gravelly loam; 2nd rate.  
Undergrowth, greasewood, mesquite, ocotilla and cactus.

-----  
From the original cor. of secs. 3, 4, 33 and 34, which in an iron post, 3 ins. in diam., 12 ins. above ground, witnessed by a mound of stone, 3 ft. base, 1½ ft. high, W. of cor., with brass cap marked

T7S R28E  
S33 | S34  
S4 | S3  
T8S  
1914

39.50  
40.00

N.0°02'W., on true line, bet. secs. 33 and 34.  
Over level ground, through low desert shrubbery.  
Wash, 20 lks. wide, course W.  
Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1½ ft. high, around post, for ¼ sec. cor. of secs. 33 and 34, with brass cap marked

¼  
S33 | S34  
1931

54.70  
77.90  
80.00

No bearing trees available.  
Old abandoned Safford and Duncan road, brs. N.80°W. and S.80°E.  
Wash, 30 lks. wide, course W.  
Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for cor. of secs. 27, 28, 33 and 34, with brass cap marked

T7S R28E  
S28 | S27  
S33 | S34  
1931

No bearing trees available; raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

Land, level.  
Soil, gravelly loam; 2nd rate.  
Undergrowth, greasewood, mesquite, cactus and sage.

40.00  
80.05  
8.90  
40.02

-----  
East, on a random line, bet. secs. 27 and 34.  
Set temp. ¼ sec. cor.  
Fall 5 lks. N. of the cor. of secs. 26, 27, 34 and 35. Thence,  
N.89°58'W., on true line, bet. secs. 27 and 34.  
Over level ground, through low desert shrubbery.  
Wash, 30 lks. wide, course N.60°W.  
Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1½ ft. high, around post, for ¼ sec. cor. of secs. 27 and 34, with brass cap marked



Survey of subdivisions, T. 7 S., R. 28 E.

Chains

$$\begin{array}{r} \frac{1}{4} \text{ S } 27 \\ \hline \text{S } 34 \\ 1931 \end{array}$$

- 41.30 No bearing trees available.
- 64.00 Wash, 20 lks. wide, course S.60°W.
- 66.10 Wash, 40 lks. wide, course N.85°W.
- 80.05 Same wash, course S.85°W.
- The cor. of secs. 27, 28, 33 and 34.

Land, level.  
 Soil, gravelly loam; 2nd rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.

N.0°02'W., on true line, bet. secs. 27 and 28.  
 Over slightly rolling ground, through low desert shrubbery.

- 28.90 Wash, 60 lks. wide, course west.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 27 and 28, with brass cap marked.

$$\begin{array}{r} \frac{1}{4} \\ \hline \text{S } 28 \mid \text{S } 27 \\ 1931 \end{array}$$

- 41.50 No bearing trees available; raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor.
- 80.00 Wash, 30 lks. wide, course W.
- Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$  ft. high, around, post, for cor. of secs. 21, 22, 27 and 28, with brass cap marked.

$$\begin{array}{r} \text{T7S, R28E} \\ \hline \text{S } 21 \mid \text{S } 22 \\ \hline \text{S } 28 \mid \text{S } 27 \\ 1931 \end{array}$$

No bearing trees available.  
 Land, slightly rolling.  
 Soil, gravelly loam; 2nd rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.

- 40.00 East, on a random line, bet. secs. 22 and 27.
- 79.96 Set temp.  $\frac{1}{4}$  sec. cor.
- Fall 5 lks. N. of the cor. of secs. 22, 23, 26 and 27. Thence,

- 8.80 N.89°58'W., on true line, bet. secs. 22 and 27.
- 15.10 Over level ground, through low desert shrubbery.
- 39.98 Foot of E. slope, asc. 51 ft.
- Top of small hill, desc. 108 ft.
- Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 22 and 27, with brass cap marked.


$$\begin{array}{r} \frac{1}{4} \text{ S } 22 \\ \hline \text{S } 27 \\ 1931 \end{array}$$

Survey of subdivisions, T. 7 S., R. 28 E.


Chains

No bearing trees available; raise a mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.  
 71.30 Wash, 15 lks. wide, course S.30°W.  
 79.96 The cor. of secs. 21, 22, 27 and 28.  
 Land, slightly rolling.  
 Soil, gravelly loam; 2nd rate.  
 Undergrowth, mesquite, greasewood and cactus.

N.0°02'W., on true line, bet. secs. 21 and 22.  
 Over level ground, through low desert shrubbery.  
 10.30 Telephone line, brs. N.85°W. and S.85°E.  
 19.20 Wash, course S. 70°W., 100 lks. wide.  
 24.60 Dim road, brs. N.80°E. and S.80°W.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for  $\frac{1}{4}$  cor. of secs. 21 and 22, with brass cap marked




No bearing trees available; raise a mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
 40.50 Wash, 10 lks. wide, course W.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound, of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, around post, for cor. of secs. 15, 16, 21 and 22, with brass cap marked



No bearing trees available:  
 Land, level.  
 Soil, gravelly loam; 2nd rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.

East, on a random line, bet. secs. 15 and 22.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.00 Intersect the cor. of secs. 14, 15, 22 and 23.  
 Thence,  
 West, on true line, bet. secs. 15 and 22.  
 Over level ground, through low desert shrubbery.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, around post, for  $\frac{1}{4}$  sec. cor. of secs. 15 and 22, with brass cap marked




No bearing trees available.  
 80.00 The cor. of secs. 15, 16, 21 and 22.  
 Land, level.  
 Soil, gravelly loam; 2nd rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.


Survey of subdivisions, T. 7 S., R. 28 E.

Chains

40.00 N. 0° 02' W., on true line, bet. secs. 15 and 16.  
 Over level ground, through low desert shrubbery.  
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 15 and 16, with brass cap marked




46.40 No bearing trees available; raise a mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
 Telephone line, brs. E. and W.  
 47.20 U.S. Highway, No. 180, brs. approximately E. and W. Junction of same, with State Highway No. 71, E. about 8 chs. dist.  
 71.10 Wash, 20 lks. wide, course west.  
 75.20 Dip road, brs. N. 45° E. and S. 45° W.  
 79.00 Being that true point for cor. in wash, set an  
 79.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for witness cor. of secs. 9, 10, 15 and 16, with brass cap marked



80.00 No bearing trees available; raise a mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
 True point for cor. in wash, 150 lks. wide, course S. 45° W.

Land, level.  
 Soil, gravelly loam; 2nd. rate.  
 Undergrowth, greasewood, mesquite and cactus.

40.00 From true point for cor. of secs. 9, 10, 15 and 16.  
 East, on random line, bet. secs. 10 and 15.  
 80.04 Set temp.  $\frac{1}{4}$  sec. cor.  
 Fall 2 lks. N. of the cor. of secs. 10, 11, 14 and 15.  
 Thence,  
 N. 89° 59' W., on true line bet. secs. 10 and 15.  
 Over slightly rolling ground, through low desert shrubbery, desc. 125 ft.  
 40.02 Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 10 and 15, with brass cap marked



76.30 No bearing trees available; raise a mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.  
 80.04 Dip road, brs. N. 45° E. and S. 45° W.  
 True point for cor. of secs. 9, 10, 15 and 16.

Land, slightly rolling.  
 Soil, gravelly loam; 2nd rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.

Survey of subdivisions, T. 7 S., R. 28 E.

Chains

From true point for cor. of secs. 9, 10, 15 and 16.  
 N.0°02'W., on true line, bet. secs. 9 and 10.  
 Over rolling ground, through low desert shrubbery, asc.  
 80 ft.  
 22.50 Low spur, slopes S.20°W., desc. 29 ft.  
 30.20 Draw, course S. 40°W., asc. 34 ft.  
 36.70 Spur, slopes S.60°W., desc. 27 ft.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in  
 the ground to bedrock; deposit a stone, marked with a  
 cross (x) at base, and raise a mound of stone, 3 ft.  
 base, 1½ ft. high, around post, for ¼ sec. cor. of secs.  
 9 and 10, with brass cap marked

¼  
 S9 | S10  
 1931

No bearing trees available.  
 56.10 Draw, course S.45°W., asc. 33 ft.  
 67.60 Spur, slopes S.30°W., desc. 11 ft.  
 72.80 Draw, course S.40°W., asc. 68 ft.  
 75.00 Spur, slopes S.50°W., desc. 25 ft.  
 79.20 Wash, 40 lks. wide, course S.40°W., asc. 5 ft.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in  
 the ground, for cor. of secs. 3, 4, 9 and 10, with  
 brass cap marked

T7S, R28E  
 S 4 | S 3  
 S 9 | S10  
 1931

No bearing trees available; raise a mound of stone, 3 ft.  
 base, 2 ft. high, W. of cor.

Land, rolling.  
 Soil, gravelly loam; 2nd rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.

East, on a random line, bet. secs. 3 and 10.  
 40.00 Set temp. ¼ sec. cor.  
 79.84 Fall 9 lks. S. of the cor. of secs. 2, 3, 10 and 11.  
 Thence,  
 S.89°56'W., on true line bet. secs. 3 and 10.  
 Over gradual SW. slope, desc. slightly, through low des-  
 ert shrubbery.  
 1.40 Drain, course S.45°W.  
 10.00 Wash, 20 lks. wide, course S. asc. 67 ft.  
 16.20 Spur, slopes S., desc. 40 ft.  
 18.90 Draw, course S.20°E., asc. 55 ft.  
 22.10 Spur, slopes S., desc. 59 ft.  
 24.20 Draw, course S., asc. 59 ft.  
 28.40 Spur, slopes S.30°W., desc. 75 ft.  
 38.30 Wash, 80 lks. wide, course S.20°W.  
 39.92 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in  
 the ground, to bedrock; deposit a stone, marked with  
 a cross (x) at base, and raise a mound of stone, 4 ft.  
 base, 2 ft. high, around post, for ¼ sec. cor. of secs.  
 3 and 10, with brass cap marked

¼ S 3  
 S 10  
 1931

Survey of subdivisions, T. 7 S., R. 28 E.

Chains

No bearing trees available.  
 41.80 Wash, 10 lks. wide, course S.  
 50.60 Drain, course S.  
 54.70 Low spur, slopes S., desc. 51 ft.  
 59.20 Draw, course S., asc. 49 ft.  
 64.80 Spur, slopes S.10°W., desc. 83 ft.  
 79.00 Wash, 40 lks. wide, course S.70°W., asc. 5 ft.  
 79.84 The cor. of secs. 3, 4, 9 and 10.

Land, rolling.  
 Soil, gravelly loam; 2nd rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.

North, on a random line, bet. secs. 3 and 4.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 78.42 Fall 2 lks. W. of the cor. of secs. 3 and 4, hereinbefore described.

Thence,  
 S.0°01'W., on true line, bet. secs. 3 and 4.  
 Over NW. slope, through low desert shrubbery, asc. 9 ft.  
 4.90 Spur, slopes S.40°W., desc. 77 ft.  
 10.80 Draw, course S. 60°W., asc. 72 ft.  
 15.30 Spur, slopes S.50°W., desc. 117 ft.  
 31.10 Draw, course S.30°W., asc. 74 ft.  
 37.90 Spur, slopes S.45°W., desc. 67 ft.  
 38.42 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, around post, for  $\frac{1}{4}$  sec. cor. of secs. 3 and 4, with brass cap marked

$\frac{1}{4}$   
 S4 | S3  
 1931

No bearing trees available;

51.70 Draw, course S.70°W., asc. 37 ft.  
 61.20 Spur, slopes S.40°W., desc. 73 ft.  
 71.60 Draw, course S.40°W., desc. 23 ft.  
 76.50 Spur, slopes S.40°W., desc. 22 ft.  
 78.42 The cor. of secs. 3, 4, 9 and 10.

Land, broken hills.  
 Soil, gravelly loam; 2nd rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.

From the original cor. of secs. 4, 5, 32 and 33, on S. bdy. of township, which is an iron post, 3 ins. in diam., 12 ins. above ground, witnessed by a mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor., and with brass cap marked

T7S | R28E  
 S32 | S33  
 S35 | S43  
 T8S  
 1914

N.0°02'W., on true line, bet. secs. 32 and 33.  
 Over level ground, through low desert shrubbery.  
 23.50 Wash, 20 lks. wide, course N.80°W.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in

Survey of subdivisions, T. 7 S., R. 28 E.

Chains

the ground, for  $\frac{1}{4}$  sec. cor. of secs. 32 and 33, with brass cap marked

$\frac{1}{4}$   
S32 | S33  
1931

52.80  
74.80  
80.00

No bearing trees available; raise a mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
Wash, 40 lks. wide, course N. 60°W.  
Wash, 50 lks. wide, course W.  
Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground, for cor. of secs. 28, 29, 32 and 33, with brass cap marked

T7S R28E  
S29 | S28  
S32 | S33  
1931

No bearing trees available; raise a mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

Land, level.  
Soil, gravelly loam; 2nd rate.  
Undergrowth, greasewood, mesquite, cactus and sage.

40.00  
80.10

East, on a random line, bet. secs. 28 and 33.  
Set temp.  $\frac{1}{4}$  sec. cor.  
Intersect cor. of secs. 27, 28, 33 and 34.  
Thence,

3.40  
8.80  
12.50  
21.30  
24.70  
40.05

West, on true line, bet. secs. 28 and 33.  
Over gradual NW. slope, through low desert shrubbery, desc. slightly.  
Dim road, brs. N.70°E. and S.70°W.  
Wash, course N.70°W.  
Same wash, course S.85°W.  
Wash, 30 lks. wide, course N.45°W.  
Dim road, brs. N.45°W. and S.45°E.  
Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 4 ft. base, 2 ft. high, around post, for  $\frac{1}{4}$  sec. cor. of secs. 28 and 33, with brass cap marked

$\frac{1}{4}$  S 28  
S 33  
1931

71.80  
80.10

No bearing trees available.  
Dim road, brs. N.45°W. and S.45°E.  
The cor. of secs. 28, 29, 32 and 33.  
Land, slightly rolling.  
Soil, gravelly loam; 2nd rate.  
Undergrowth, greasewood, mesquite and cactus.


4.10  
18.50  
40.00

N.0°02'W. on true line, bet. secs. 28 and 29.  
Over level ground, through low desert shrubbery.  
Old Safford-Duncan road, brs. N.85°W. and S.85°E.  
Wash, 160 lks. wide, course S.80°W.  
Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground, to bedrock; deposit a stone, marked with a

Survey of subdivisions, T. 7 S., R. 28 E.

Chains

cross (x) at base, and raise a mound of stone, 4 ft. base, 1 1/2 ft. high, around post, for 1/4 sec. cor. of secs. 28 and 29, with brass cap marked



1931


No bearing trees available.

50.10 Wash, 60 lks. wide, course S.70°W.

57.10 Old road, brs. N.70°E. and S.70°W.

66.00 Old road, N.45°W. and S.45°E.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground, to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1 1/2 ft. high, around post, for cor. of secs. 20, 21, 28 and 29, with brass cap marked



1931

No bearing trees available.

Land, level.

Soil, gravelly loam; 2nd rate.

Undergrowth, greasewood, mesquite, cactus and sage.

East, on a random line, bet. secs. 21 and 28.

40.00 Set temp. 1/4 sec. cor.

80.10 Fall 5 lks. N. of the cor. of secs. 21, 22, 27 and 28.

Thence,


N.89°58'W., on true line, bet. secs. 21 and 28.

Over gradual SW. slope, through low desert shrubbery, desc. slightly.

30.30 Wash, 60 lks. wide, course S. 60° W.

39.50 Old road, brs. N.45°E. and S.45°W.

40.05 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1 1/2 ft. high, around post, for 1/4 sec. cor. of secs. 21 and 28, with brass cap marked



1931

No bearing trees available.

80.10 The cor. of secs. 20, 21, 28 and 29.

Land, slightly rolling.

Soil, gravelly loam; 2nd rate.

Undergrowth, greasewood, mesquite, cactus and sage.


N.0°02'W., on true line, bet. secs. 20 and 21.

Over gradual SW. slope, through low desert shrubbery, asc. slightly.


19.60 Telephone line, brs. N.85°W. and S.85°E.

Survey of subdivisions, T. 7 S., R. 28 E.

Chains  
 34.70 Wash, 20 lks. wide, course S. 70° W.  
 38.60 Wash, 20 lks. wide, course S. 40° W.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground, to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 4 ft. base, 2 ft. high, around post, for 1/4 sec. cor. of secs. 20 and 21, with brass cap marked




No bearing trees available.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 16, 17, 20 and 21, with brass cap marked



No bearing trees available; raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.  
 Land, slightly rolling.  
 Soil, gravelly loam; 2nd rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.


40.00 East, on a random line, bet. secs. 16 and 21.  
 Set temp. 1/4 sec. cor.  
 80.18 Fall 7 lks. N. of the cor. of secs. 15, 16, 21 and 22.  
 Thence,  
 N. 89° 57' W., on true line, bet. secs. 16 and 21.  
 Over gradual SW. slope, through low desert shrubbery.  
 40.09 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 4 ft. base, 1 1/2 ft. high, around post, for 1/4 sec. cor. of secs. 16 and 21, with brass cap marked



80.18 No bearing trees available.  
 The cor. of secs. 16, 17, 20 and 21.

Land, slightly rolling.  
 Soil, gravelly loam; 2nd rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.

X  
 40.00 N. 0° 02' W., on true line, bet. secs. 16 and 17.  
 Over gradual SW. slope, through low desert shrubbery.  
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor. of secs. 16 and 17, with brass cap marked



T. 7 S.  
 R. 28 E.



Survey of subdivisions, T. 7 S., R. 28 E.

Chains

No bearing trees available; raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.  
 Highway maintenance house brs. S. 79° 54' E., 35.87 chs. dist.  
 Baker Service Station, brs. S. 88° 17' E., 40.64 chs. dist.  
 Desc. 28 ft. over NW. slope.  
 Enter wash, course W.  
 Leave wash, course W., asc. 174 ft. over SW slope.  
 West slope of hill, desc. 97 ft.  
 Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 4 ft. base, 2 ft. high, around post, for cor. of secs. 8, 9, 16 and 17, with brass cap marked.

49.00  
 54.60  
 57.40  
 70.00  
 80.00

T7S R28E  
 S8 | S9  
 S17 | S16  
 1931

No bearing trees available.  
 Land, rolling.  
 Soil, gravelly loam; 2nd rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.

East, on a random line, bet. secs. 9 and 16.  
 Set temp. 1/4 sec. cor.  
 Fall 2 lks. N. of true point for cor. of secs. 9, 10, 15 and 16.  
 Thence,  
 N. 89° 59' W., on true line, bet. secs. 9 and 16.  
 Over slightly rolling ground, through low desert shrubbery.  
 Drain, course S., asc. 92 ft. over E. slope.  
 Spur, slopes N., thence along N. slope.  
 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 6 ft. base, 2 1/2 ft. high, around post, for 1/4 sec. cor. of secs. 9 and 16, with brass cap marked.

40.00  
 80.16  
 20.00  
 30.10  
 40.08

1/4 S 9  
 S 16  
 1931

No bearing trees available.  
 Desc. 71 ft.  
 Draw, N. 20° W., asc. 43 ft.  
 Small spur, slopes N. desc. 58 ft.  
 Draw, course N., asc. 38 ft.  
 Small spur, slopes N.  
 Spur, slopes N., desc. 45 ft.  
 Draw, course N. 50° W., asc. 51 ft.  
 The cor. of secs. 8, 9, 16 and 17.

49.30  
 55.10  
 60.90  
 65.10  
 72.00  
 76.50  
 80.16

Land, rolling.  
 Soil, gravelly loam; 3rd rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.

N. 0° 02' W., on true line, bet. secs. 8 and 9.  
 Over NE. slope, through low desert shrubbery, desc. 63 ft.  
 Draw, course N. 45° W.

5.10

Survey of subdivisions, T. 7 S., R. 28 E.

Chains

8.50 Point of spur, N.45°W.  
 9.60 Draw, course W., thence over basin land, draining S.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 8 and 9, with brass cap marked

$\frac{1}{4}$   
 S8 | S9  
 1931

No bearing trees available; raise a mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
 Desc. 58 ft.

57.50 Drain, N.20°E.  
 62.30 Wash, 40 lks. wide, course west, thence along broken W. slope.  
 71.40 Spur, course W., desc. 41 ft.  
 74.80 Wash, 100 lks. wide, course west, asc. 24 ft.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 in the the ground, for cor. of secs. 4, 5, 8 and 9, with brass cap marked

T7S R28E  
 S5 | S4  
 S8 | S9  
 1931

No bearing trees available, raise a mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
 Land, rolling,  
 Soil, gravelly loam; 3rd. rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.

East, on a random line, bet. secs. 4 and 9.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.18 Fall 5 lks. S. of the cor. of secs. 3, 4, 9 and 10.  
 Thence,  
 S.89°58'W., on true line, bet. secs. 4 and 9.  
 Over SW. slope, through low desert shrubbery, asc. 12 ft.  
 1.50 Low spur, slopes S.60°W., desc. 82 ft.  
 13.80 Bend in wash, 60 lks. wide, from N.70°E. to N.80°W.  
 23.90 Wash, 40 lks. wide, course S.70°W., asc. 38 ft.  
 40.09 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 4 and 9, with brass cap marked


$\frac{1}{4}$  S 4  
 S 9  
 1931

No bearing trees available; raise a mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.  
 42.20 Spur, slopes S.80°W., desc. 163 ft.  
 67.30 Wash, 100 lks. wide, course S.70°W., thence along S. slope.  
 80.18 The cor. of secs. 4, 5, 8 and 9.

Land, rolling,  
 Soil, gravelly loam; 3rd rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.

Survey of subdivisions, T. 7 S., R. 28 E.

Chains  
 North on a random line, bet. secs. 4 and 5.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 78.51 Fall 19 lks. W. of the cor. of secs. 4 and 5, herein-  
 before described.  
 Thence,  
 S.0°08'W., on true line, bet. secs. 4 and 5.  
 Over gentle SW. slope, through low desert shrubbery,  
 desc. slightly.  
 1.10 Wash, 20 lks. wide, course W., asc. 27 ft.  
 2.10 Small spur, slopes W., desc. 55 ft.  
 17.00 Wash, 20 lks. wide, course N.80°W., thence along gradual  
 SW. slope, desc. 33 ft.  
 36.90 Draw, course S.80°W., asc. 42 ft.  
 38.51 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in  
 the ground, for  $\frac{1}{4}$  sec. cor. of secs. 4 and 5, with  
 brass cap marked




No bearing trees available; raise a mound of stone, 3 ft.  
 base,  $1\frac{1}{2}$  ft. high, W. of cor.  
 41.00 Spur, slopes W.  
 49.20 Draw, course N.80°W.  
 55.70 Spur, slopes W., desc. 61 ft.  
 65.50 Draw, course W., asc. 51 ft.  
 74.30 Spur, slopes W., desc. 96 ft.  
 78.51 The cor. of secs. 4, 5, 8, and 9.

Land, rolling.  
 Soil, gravelly loam; 3rd rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.

From the original cor. of secs. 5, 6, 31 and 32, on S.  
 bdy. of township, which is an iron post, 3 ins. in  
 diam., 8 ins. above ground, witnessed by a mound of  
 stone, 3 ft. base,  $1\frac{1}{2}$  ft. high to W., and with brass  
 cap marked



N.0°03'W., on true line, bet. secs. 31 and 32.  
 Over level ground, through low desert shrubbery.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
 the ground, for  $\frac{1}{4}$  sec. cor. of secs. 31 and 32, with  
 brass cap marked



No bearing trees available; raise a mound of stone, 3 ft.  
 base,  $1\frac{1}{2}$  ft. high, W. of cor.  
 43.00 Wash, 20 lks. wide, course W.  
 77.80 Wash, 40 lks. wide, course N.85°W.

Survey of subdivisions, T. 7 S., R. 28 E.

Chains  
80.00

Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 29, 30, 31 and 32, with brass cap marked

T7S	R28E
S30	S29
S31	S32
1931	

No bearing trees available; raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.

Land, level.

Soil, gravelly loam; 2nd rate.

Undergrowth, greasewood, mesquite, cactus and sage.

-----

East, on a random line, bet. secs. 29 and 32.

40.00

Set temp. 1/4 sec. cor.

80.00

Fall 2 lks. N. of the cor. of secs. 28, 29, 32 and 33, Thence,

N. 89° 59' W., on true line, bet. secs. 29 and 32.

Over gradual W. slope, through low desert shrubbery, desc. slightly.

40.00

Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 4 ft. base, 1 1/2 ft. high, around post, for 1/4 sec. cor. of secs. 29 and 32, with brass cap marked

1/4	S 29
	S 32
1931	

No bearing trees available.

42.60

Wash, 40 lks. wide, course N. 70° W.

52.90

Same wash, 40 lks. wide, course S. 70° W.

80.00

The cor. of secs. 29, 30, 31 and 32.

Land, slightly rolling.

Soil, gravelly loam; 2nd rate.

Undergrowth, greasewood, mesquite and sage.

-----

West, on a random line bet. secs. 30 and 31.

40.00

Set temp. 1/4 sec. cor.

72.75

Fall 39 lks. N. of the cor. of secs. 25, 30, 31 and 36, hereinbefore described.

Thence,

N. 89° 46' E., on true line bet. secs. 30 and 31.

Over gradual W. slope, through low desert shrubbery, asc. slightly.

32.75

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for 1/4 sec. cor. of secs. 30 and 31, with brass cap marked

1/4	S 30
	S 31
1931	

No bearing trees available; raise a mound of stone, 3 ft. base, 1 1/2 ft. high, N. of cor.

Survey of subdivisions, T. 7 S., R. 28 E.


Chains  
60.60  
72.75

Wash, 30 lks. wide, course N.70°W.  
The cor. of secs. 29, 30, 31 and 32.

Land, slightly rolling.  
Soil, gravelly loam; 2nd. rate.  
Undergrowth, greasewood, mesquite and sage.


21.40  
27.70  
36.60  
40.00

N.0°03'W., on true line, bet. secs. 29 and 30.  
Over gradual W. slope; through low desert shrubbery,  
asc. slightly.  
Wash, 100 lks. wide, course W.  
Old abandoned Safford and Duncan road, brs. N.80°W. and  
S.80°E.  
Dim road, brs. N.70°E. and S.70°W.  
Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor. of secs. 29 and 30, with  
brass cap marked



61.40  
80.00

No bearing trees available; raise a mound of stone, 3 ft.  
base, 1 1/2 ft. high, W. of cor.  
Wash, 30 lks. wide, course S.60°W.  
Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in  
the ground, for cor. of secs. 19, 20, 29 and 30, with  
brass cap marked




No bearing trees available; raise a mound of stone, 3 ft.  
base, 1 1/2 ft. high, W. of cor.  
Land, slightly rolling,  
Soil, gravelly loam; 2nd rate.  
Undergrowth, greasewood, mesquite and cactus.

40.00  
80.02

East, on a random line, bet. secs. 20 and 29.  
Set temp.  $\frac{1}{4}$  sec. cor.  
Fall 5 lks. N. of the cor. of secs. 20, 21, 28 and 29.  
Thence,  
N.89°58'W., on true line, bet. secs. 20 and 29.  
Over gradual SW. slope, through low desert shrubbery,  
desc. slightly.

17.60  
40.01

Dim road, brs. N.20°W. and S.20°E.  
Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor. of secs. 20 and 29, with  
brass cap marked



42.00  
67.20

No bearing trees available.  
raise a mound of stone, 3 ft. base, 1 1/2 ft. high, N. of cor.  
Wash, 10 lks. wide, course S.60°W.  
Wash, 30 lks. wide, course S.45°W.

Chains  
80.02

The cor. of secs. 19, 20, 29 and 30.

Land, slightly rolling.  
Soil, gravelly loam; 2nd rate.  
Undergrowth, greasewood, mesquite, cactus and sage.

23.90  
40.00

-----  
West, on true line, bet. secs. 19 and 30.  
Over gradual SW. slope, through low desert shrubbery,  
desc. slightly.  
Wash, 20 lks. wide, course S. 40°W.  
Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor. of secs. 19 and 30, with  
brass cap marked

$\frac{1}{4}$  S 19  
-----  
S 30  
1931

72.52

No bearing trees available; raise a mound of stone, 3 ft.  
base, 2 ft. high, N. of cor.  
Intersect W. bdy. of township, N. 0° 04' E., 52 lks. dist.,  
from the cor. of secs. 24 and 25, T. 7 S., R. 27 E. At  
this point of intersection,  
Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in  
the ground, for closing cor. of secs. 19 and 30, with  
brass cap marked

T7S T7S  
R27E | S19  
-----  
S30 CC  
S24 R28E  
1931

No bearing trees available; raise a mound of stone, 3 ft.  
base,  $1\frac{1}{2}$  ft. high, E. of cor.  
Land, slightly rolling.  
Soil, gravelly loam; 2nd rate.  
Undergrowth, greasewood, mesquite and cactus.

20.30  
26.20  
26.70  
40.00

-----  
From the cor. of secs. 19, 20, 29 and 30, hereinbefore  
described.  
N. 0° 03' W., on true line, bet. secs. 19 and 20.  
Over gradual SW. slope, through low desert shrubbery,  
asc. slightly.  
Drain, 5 lks. wide, course S. 45° W..  
Telephone line, brs. E. and W.  
Wash, 20 lks. wide, course S. 30° W.  
Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in  
the ground to bedrock; deposit a stone, marked with a  
cross (x) at base, and raise a mound of stone, 3 ft.  
base,  $1\frac{1}{2}$  ft. high, around post, for  $\frac{1}{4}$  sec. cor. of secs.  
19 and 20, with brass cap marked

$\frac{1}{4}$   
S19 | S20  
-----  
1931

No bearing trees available.

Survey of subdivisions, T. 7 S., R. 28 E.

Chains  
80.00

Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1 1/2 ft. high, around post, for cor. of secs. 17, 18, 19 and 20, with brass cap marked

T7S R28E  
S18 | S17  
-----  
S19 | S20  
1931

No bearing trees available.

Land, slightly rolling.  
Soil; gravelly loam; 2nd rate.  
Undergrowth, greasewood, mesquite, cactus and sage.

40.00

East, on a random line, bet. secs. 17 and 20

79.98

Set temp. 1/4 sec. cor.  
Fall 9 lks. N. of the cor. of secs. 16, 17, 20 and 21.

Thence, N. 89° 56' W., on true line, bet. secs. 17 and 20.

14.20

Over level ground, through low desert shrubbery.

39.99

Telephone line, brs. N. 20° E. and S. 20° W.  
Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1 1/2 ft. high, around post, for 1/4 sec. cor. of secs. 17 and 20, with brass cap marked

1/4 S 17  
-----  
S 20  
1931

No bearing trees available.

42.10

Lim. road, brs. N. and S.

79.40

Wash, 10 lks. wide, course N. 40° W.

79.98

The cor. of secs. 17, 18, 19 and 20.

Land, level.  
Soil, gravelly loam; 2nd rate.  
Undergrowth, greasewood, mesquite, cactus and sage.

24.00

West, on true line, bet. secs. 18 and 19.  
Along gradual N. slope, through low desert shrubbery.  
Wash, 20 lks. wide, course N. 45° E., asc. 132 ft. over NE. slope.

40.00

Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground, to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 5 ft. base, 2 ft. high, around post, for 1/4 sec. cor. of secs. 18 and 19, with brass cap marked

1/4 S 18  
-----  
S 19  
1931

45.20

N. slope of small hill, desc. 152 ft.


72.57

Intersect W. bdy. of township, N. 0° 02' E., 68 lks. dist., from the cor. of secs. 13 and 24, T. 7 S., R. 27 E. At

Survey of subdivisions, T. 7 S., R. 28 E.

Chains

this point of intersection,  
Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in  
the ground, for closing cor. of secs. 18 and 19,  
with brass cap marked




No bearing trees available; raise a mound of stone, 3 ft.  
base, 1 1/2 ft. high, E. of cor.

Land, rolling.  
Soil, gravelly loam; 2nd rate.  
Undergrowth, greasewood, cactus, mesquite and sage.

From the cor. of secs. 17, 18, 19 and 20, hereinbefore  
described.  
N.0°03'W., on true line, bet. secs. 17 and 18.  
Over NW. slope, through low desert shrubbery, desc. slight-  
ly.

0.70  
5.10  
15.50  
40.00

Wash, 10 lks. wide, course N.50°W.,  
Wash, 20 lks. wide, course west.  
Dim road, brs. N.60°E. and S.60°W.  
Set an iron post, 3 ft. long, 1 in in diam., 26 ins. in  
the ground, for 1/4 sec. cor. of secs. 17 and 18, with  
brass cap marked



41.90  
50.60  
54.30  
80.00

No bearing trees available; raise a mound of stone, 3 ft.  
base, 1 1/2 ft. high, W. of cor.  
East point of small hill, desc. 39 ft. over NE. slope.  
U.S. Highway No. 180, brs. N.60°W. and S.60°E.  
Wash, 20 lks. wide, course N.70°W.  
Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in  
the ground, for cor. of secs. 7, 8, 17 and 18, with  
brass cap marked



No bearing trees available; raise a mound of stone, 3 ft.  
base, 1 1/2 ft. high, W. of cor.

Land, rolling.  
Soil, gravelly loam; 2nd rate.  
Undergrowth, greasewood, mesquite, cactus and sage.

40.00  
79.92

East, on a random line, bet. secs. 8 and 17.  
Set temp. 1/4 sec. cor.  
Fall, 12 lks. N. of the cor. of secs. 8, 9, 16 and 17.



Survey of subdivisions, T. 7 S., R. 28 E.


Chains

Thence,  
 N. 89°55'W., on true line bet. secs. 8 and 17.  
 Over NE. slope, through low desert shrubbery, asc. 22 ft.  
 1.90 Spur, slopes N., desc. 106 ft.  
 26.30 Enter wash, course N. 45°W.  
 36.40 Leave wash, course N. 45°W.; thence along gradual N. slope.  
 39.96 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in  
 the ground to bedrock; deposit a stone, marked with a  
 cross (x) at base, and raise a mound of stone, 4 ft.  
 base, 1½ ft. high, around post, for ¼ sec. cor. of secs.  
 8 and 17, with brass cap marked

¼ S 8  
 S17  
 1931

No bearing trees available;  
 42.60 Wash, 10 lks. wide, course N. 30°W., asc. 46 ft.  
 54.90 Spur, slopes N., desc. 46 ft.  
 60.50 Draw, course N., asc. 85 ft.  
 67.30 Spur, slopes N., desc. 117 ft.  
 77.50 Wash, course N. 30°W., 20 lks. wide.  
 79.92 The cor. of secs. 7, 8, 17 and 18.

Land, rolling.  
 Soil, gravelly loam; 2nd rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.



West, on true line, bet. secs. 7 and 18.  
 Over E. slope, through low desert shrubbery, asc. 94 ft.  
 6.40 Top of hill, desc. 94 ft., over NW. slope.  
 11.50 Foot of slope, thence over slightly rolling ground.  
 20.20 Wash, 30 lks. wide, course N. 20°W.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in  
 the ground, to bedrock; deposit a stone, marked with  
 a cross (x) at base, and raise a mound of stone, 3 ft.  
 base, 1½ ft. high, around post, for ¼ sec. cor. of secs.  
 7 and 18, with brass cap marked

¼ S 7  
 S18  
 1931

No bearing trees available.  
 44.60 U.S. Highway, No. 180, brs. N. 75°W. and S. 75°E.  
 50.40 Asc. 41 ft. over NE. slope.  
 57.00 N. slope of small hill, desc. 52 ft. over NW. slope.  
 72.37 Intersect W. bdy. of township, N., 72 lks. dist. from the  
 cor. of secs. 12 and 13, T. 7 S., R. 27 E. At this  
 point of intersection,  
 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in  
 the ground, for closing cor. of secs. 7 and 18, with  
 brass cap marked

T7S | T7S  
 S7  
 R27E | S18 CC  
 S12 R28E  
 1931

No bearing trees available; raise a mound of stone, 3 ft.  
 base, 1½ ft. high, E. of cor.

Land, rolling.  
 Soil, gravelly loam; 2nd rate.  
 Undergrowth, greasewood, mesquite and cactus.

Survey of subdivisions, T. 7 S., R. 28 E.

Chains

From the cor. of secs. 7, 8, 17 and 18, hereinbefore, described.

N.0°03'W., on true line, bet. secs. 7 and 8.

Over gradual N. slope, through low desert shrubbery, desc. 11 ft.

4.20 Small wash, N.30°W., thence over level ground.

29.30 Old road, brs. N.50°E. and S.50°W.

31.70 Black rock ledge, 20 ft. high, faces E.

36.70 Wash, 100 ft. wide, course W.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 2 ft. high, around post, for 1/4 sec. cor. of secs. 7 and 8, with brass cap marked

1/2  
S7 | S8  
1931

No bearing trees available.

54.30 Wash, 30 lks. wide, course N.80°W.

63.00 Small draw, course W.

72.40 Small draw, course S.70°W.

79.60 Desc. 15 ft. over NE. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for cor. of secs. 5, 6, 7 and 8, with brass cap marked

T7S R28E  
S6 | S5  
S7 | S8  
1931

No bearing trees available; raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling.

Soil, gravelly loam; 3rd rate.

Undergrowth, greasewood, mesquite, cactus and sage.

East, on a random line, bet. secs. 5 and 8.

40.00 Set temp. 1/4 sec. cor.

80.00 Fall 9 lks. N. of the cor. of secs. 4, 5, 8 and 9.

Thence,

N.89°56'W., on true line, bet. secs. 5 and 8.

Over broken S. slope, through low desert shrubbery.

16.00 Thence over SW. slope, desc. 130 ft.

30.90 Draw, course N.70°W., asc. 88 ft.

39.00 Short spur, slopes N., desc. 157 ft.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 2 ft. high, around post, for 1/4 sec. cor. of secs. 5 and 8, with brass cap marked

1/4 S 5  
S 8  
1931

No bearing trees available.

61.80 Bend in wash, 150 lks. wide, from N.30°E. to N.70°W., asc. 78 ft. over NE. slope.

80.00 The cor. of secs. 5, 6, 7 and 8.

Survey of subdivisions, T. 7 S., R. 28 E.

Chains

Land, rolling,  
Soil, gravelly loam; 2nd rate.  
Undergrowth, greasewood, mesquite, cactus and sage.

0.50  
22.20  
40.00

-----  
West, on true line, bet. secs. 6 and 7.  
Over NE. slope, through low desert shrubbery, asc. 15 ft.  
Thence, desc. slightly over NW. slope.  
Wash, 30 lks. wide, course N.20°E.  
Set an iron post, 3 ft. long, 1-in. in diam., 18 ins. in  
the ground to bedrock; deposit a stone, marked with a  
cross (x) at base, and raise a mound of stone, 3 ft.  
base, 1½ ft. high, around post, for ¼ sec. cor. of secs.  
6 and 7, with brass cap marked

¼ 36  
S 7  
-----  
1931

62.70  
72.28

No bearing trees available.  
Wash, 200 lks. wide, course N.70°W.  
Intersect W. bdy. of township, N.0°24'W., 88 lks. dist.,  
from the cor. of secs. 1 and 12, T. 7 S., R. 27 E., here-  
inbefore described. At this point of intersection,  
Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in  
the ground, for closing cor. of secs. 6 and 7, with  
brass cap marked

T7S T7S  
S1 S6  
S7 CC  
R27E R28E  
-----  
1931

No bearing trees available; raise a mound of stone, 3 ft.  
base, 2 ft. high, E. of cor.

Land, rolling.  
Soil, gravelly loam; 3rd rate.  
Undergrowth, greasewood, mesquite, cactus and sage.

40.00  
78.48

-----  
From the cor. of secs. 5, 6, 7 and 8, hereinbefore  
described.  
North, on a random line, bet. secs. 5 and 6.  
Set temp. ¼ sec. cor.  
Fall 16 lks. W. of the cor. of secs. 5 and 6, hereinbefore  
described.

2.90  
6.60  
16.10  
28.30  
35.60  
37.00  
38.48

Thence,  
S.0°07'W. on true line bet. secs. 5 and 6.  
Over S. slope, through low desert shrubbery, desc. 70 ft.  
Draw, course W., asc. 58 ft.  
Point of spur, sloping N.80°W., desc. 45 ft.  
Draw, course N.40°W., asc. 156 ft.  
Spur, slopes N.60°W., desc. 41 ft.  
Draw, course W., asc. 41 ft.  
Point of spur, slopes W., desc. 5 ft.  
Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in  
the ground to bedrock; deposit a stone, marked with a  
cross (x) at base, and raise a mound of stone, 3 ft.  
base, 1½ ft. high, around post, for ¼ sec. cor. of secs.  
5 and 6, with brass cap marked


¼  
S6 | S5  
-----  
1931

Survey of subdivisions, T. 7 S., R. 28 E.

Chains

41.50 Draw, course N.40°W., asc. 132 ft.  
 50.80 Spur, slopes N.80°W., desc. 107 ft.  
 73.70 Draw, course N80°W., asc. 106 ft.  
 78.48 The cor. of secs. 5, 6, 7 and 8.

Land, broken.  
 Soil, gravelly loam; 3rd rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.



Survey of meanders of Gila River, through sec. 6, T. 7 S., R. 28 E.

-----  
East portion of right bank  
-----

From the meander cor. of secs. 6 and 31, hereinbefore described.  
Along right margin of river, down stream, through sec. 6.  
S. 54°20'W., 3.07 chs. Over alluvial deposit, bank  
S. 65°00'W., 2.70 " " about 4 ft. high.  
West, 7.10 " " " "  
N. 71°00'W., 1.30 " " " "  
N. 45°30'W., 3.60 " " " "  
N. 86°30'W., 2.00 " " To meander cor. of secs. 6 and 31, hereinbefore described.

Land, level.  
Soil, sandy loam; 2nd rate.  
Timber, cottonwood.  
Undergrowth, willow.

-----  
West portion of right bank  
-----

From the meander cor. of secs. 6 and 31, hereinbefore described.  
Along right margin of river, down stream, through sec. 6.  
S. 53°57'W., 6.45 chs. Over alluvial deposit, bank  
about 4 ft. high.  
S. 83°45'W., 7.70 " To meander cor. of fractional  
secs. 1 and 6, T. 7 S., Rs.  
27 and 28 E., hereinbefore  
described.

Land, level.  
Soil, sandy loam; 3rd rate.  
Timber, cottonwood.  
Undergrowth, willows.

-----  
Left bank of river  
-----

From the meander cor. of secs. 6 and 31, Tps. 6 and 7 S., R. 28 E., hereinbefore described.  
Along left margin of river, down stream, through sec. 6.  
S. 44°00'W., 5.90 chs. Over alluvial deposit, bank 4  
ft. high.  
At 0.65 chs., wash, 50 lks.  
wide, from SE.  
S. 68°45'W., 7.60 chs.  
N. 86°00'W., 3.70 " "  
N. 43°45'W., 3.90 " "  
N. 82°15'W., 9.90 " "  
N. 87°30'W., 7.20 " At 5.00 chs. mouth of wash, 60  
lks. wide, from S.  
S. 80°00'W., 11.40 " "  
S. 69°00'W., 6.30 " "  
S. 79°45'W., 5.75 " To meander cor. of secs. 1 and 6, T. 7 S., Rs. 27 and 28 E.

Land, level.  
Soil, sandy loam; 1st rate.  
Timber, cottonwood.  
Undergrowth, Willows and reeds.

Resurvey of part of the meanders of the right bank of the Gila River, through sec. 31, T. 6 S., R. 28 E.

The meanders of the right bank of the Gila River through sec. 31, were surveyed by P. Contzen, U.S.D.S., in 1895, in connection with the survey of the boundaries and part of the subdivisions, of T. 6 S., R. 28 E.

In making the resurvey of the south boundary of this township, it was found that heavy floods had changed the channel of the river to such an extent, that its present position, bore little resemblance to its former position, at the time Deputy Contzen made the original survey.

From the meander cor. of secs. 6 and 31, Tps. 6 and 7 S., R. 28 E., hereinbefore described.

Along right margin of river, down stream, through sec. 31.

N. 82° 15' W., 3.80 chs. Across alluvial deposit, bank about 4 ft. high.

N. 87° 30' W., 8.00 "

N. 86° 15' W., 9.10 "

S. 63° 30' W., 3.80 " To meander cor. of secs. 6 and 31, hereinbefore described.

Land, level.

Soil, sandy loam; 1st rate.

Timber, cottonwood.

Undergrowth, willow.

#### GENERAL DESCRIPTION

T. 7 S., R. 28 E. is situated about 6 miles east of Solomonville, Arizona. Its altitude ranges from about 2900 ft. above sea level in sec. 6 to 3800 ft. above sea level in the extreme northeastern part of the township. U.S. Highway No. 180 enters the township near the southwest corner of sec. 7, forms a junction with State Highway No. 71 near the west center of sec. 15, and passes out of the township near the south east corner of sec. 24.

The land embraced within the south and east portions of this township is generally slightly rolling, sloping gradually to the southwest from the east boundary, which is crossed by several low ridges. The land in the northwestern portion of the township is generally broken by low ridges and gulches, sloping in a general westerly direction, draining into the Gila River, which runs thru the northwest part of sec. 6.

The soil is generally a gravel or sandy loam, frequently interspersed with rocks of volcanic origin.

There is no timber of importance. The undergrowth is greasewood, cactus, mesquite, sage and other varieties usually found in the semi-arid parts of Arizona. There is a thin stand of native grass:

No mineral was observed.

#### FINAL TEST OF SOLAR ATTACHMENT

Feb. 9, 1931: On the meridian described on page 3, hereof, at 9<sup>h</sup>00<sup>m</sup> a.m., app.t., set off 32° 49½' on the lat. arc; 14° 48' S. on the decl. arc; and orient the instrument with solar; the line of sight agrees within 1' with the meridian established by Polaris observation.

At 3<sup>h</sup>00<sup>m</sup> p.m., app.t., set off 32° 49½' on the lat. arc; 14° 43½' S. on the decl. arc; and repeat the test of the solar; the line of sight agrees within 1' with the meridian established by Polaris observation.

February 9, 1931.

4-680  
(August, 1926)

FIELD ASSISTANTS.  
to  
Charles E. Hunter, U.S. Transitman

NAMES.	CAPACITY.
Howard Beard	1st Chainman
W. B. Kniskern	2nd Chainman
E. G. Fish	Cornerman
David T. Ashbaugh	Flagman

CERTIFICATE OF UNITED STATES SURVEYOR

I, Charles E. Hunter U.S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer, for Group 161, Arizona bearing date of the 9th day of June, 1930, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, ~~resurveyed~~ <sup>surveyed</sup> all those parts or portions of the West Bdy. of T.7 S., R.28 E., the South Bdy. of T.6 S., R.28 E., and the Meanders of the Right Bank of the Gila River in Sec.31 of T.6 S., R.28 E., and surveyed all those parts or portions of the East Bdy. and Subdivision Lines of and the Meanders of the Gila River within Township 7 South, Range 28 East of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes <sup>and by diagram on page 2 hereof</sup> as having been executed by me, and under my direction; and that all the corners of ~~said resurvey~~ <sup>said survey</sup> and survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer, for Group 161, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such ~~resurvey~~ <sup>survey</sup> and survey.

Place: Phoenix, Arizona.  
Date: July 1, 1931.

*Charles E. Hunter*  
U.S. Transitman

APPROVAL

OFFICE OF U. S. SUPERVISOR OF SURVEYS,  
Denver, Colo., April 2, 1932

The foregoing field notes of the ~~resurvey~~ <sup>survey</sup> of the West Bdy. of T.7 S., R.28 E., the South Bdy. of T.6 S., R.28 E., and the meanders of the Right Bank of the Gila River thru Part of Sec.31, T.6 S., R.28 E., and of the survey of the East Bdy. and Subdivision Lines of T.7 S., R.28 E., and meanders of the Gila River thru Sec.6 of T.7 S., R.28 E., of the Gila and Salt River Base and Meridian, in the State of Arizona

executed by Charles E. Hunter, U. S. Transitman under his special instructions dated June 9, 1930 for Group 161 Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the ~~resurveys~~ <sup>surveys</sup> and surveys they describe, are hereby approved.

*Samuel H. Johnson*  
U. S. Supervisor of Surveys.

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~  
~~has been correctly copied from the original notes on file in this office.~~

~~U. S. Supervisor of Surveys.~~