

# FIELD NOTES

BOOK 3914

OF THE SURVEY OF THE

3914

East Boundary

West Boundary

North Boundary and

Subdivision Lines of

Township 8 South, Range 30 East

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

3914

Charles E. Hunter, U.S. Transitman

In the capacity of U. S. Surveyor, under Special Instructions dated June 9, 1930, issued by the District Cadastral Engineer to govern surveys included in Group No. 161 Arizona, which were approved by the Commissioner of the General Land Office, July 24, 1930, and Assignment Instructions dated January 5, 1931.


Survey commenced February 16, 1931.

Survey completed March 10, 1931.

Book "B"

Group 161 Arizona

BOOK 3914

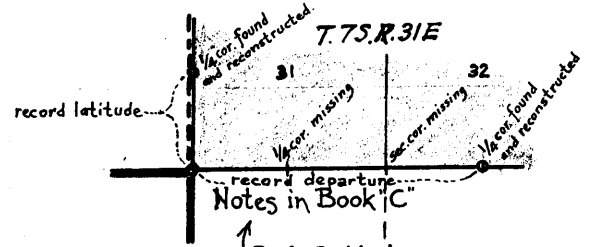

INDEX DIAGRAM.

DIAGRAM showing METHOD used in the REESTABLISHMENT OF MISSING TP. COR.

	14		13		12		11		10	
10	47	48	47	39	33	32	26	20	1	6
9	46	46	45	38	31	31	25	19	12	6
9	45	45	44	37	30	24	18	18	18	5
8	44	44	44	37	36	30	24	23	18	5
8	43	43	42	36	29	23	17	24	16	4
8	42	42	41	35	28	22	16	25	16	4
7	41	41	41	40	34	28	21	16	15	3
7	40	40	39	34	27	21	15	36	3	3

- Surveyed under this group
- - - - - Resurveyed under this group,
- Accepted surveyed lines.
- - - - - Unsurveyed.
- Areas surveyed as per accepted plats on file.

BOOK 3914

Book "B"

16

Group 161 Arizona

Township 8 South, Range 30 East

DATE DIAGRAM

(1931)

	3-10	3-9	3-3	3-3	3-3	3-3	
2-24	6 3-10	3-9 3-9	5 3-7	4 3-7	3 3-6	2 3-5	1 3-4
2-24	7 2-28	3-9 2-28	8 2-28	9 2-27	10 2-27	11 2-25	12 3-4
2-24	18 2-28	2-28 2-23	17 2-23	16 2-23	15 2-20	14 2-25	13 2-16
2-24	19 2-23	2-23 2-21	20 2-21	21 2-20	22 2-19	23 2-17	24 2-16
2-23	30 2-21	2-21 2-19	29 2-19	28 2-19	27 2-17	26 2-17	25 2-16
2-21	31 2-19	2-19 2-18	32 2-18	33 2-17	34 2-17	35 2-16	36 2-16

Surveyed by Karl L. Siebecker, U.S. Transitman in 1920

2-19 Surveyed under this group by Charles E. Hunter, U.S. Transitman, on dates (1931) shown thereon. Notes herein.

Surveys herein described, were executed on dates shown on diagram on page 1, hereof, by Charles E. Hunter, U. S. Transitman, using a Young and Sons transit, No. 8584. The instrument is equipped with an improved Smith solar attachment. The horizontal limb is provided with two double verniers, placed opposite each other, reading to single minutes of arc, which is also, the least count of the verniers of the vertical circle, latitude, and declination arcs.

The instrument was approved, subject to the usual field tests, by the District Cadastral Engineer for Arizona. Unless otherwise specified, all azimuths are determined with the solar attachment, and all measurements are made with a Lallie steel tape, five chains in length, compared with a Lufkin standard steel tape, and found correct.

The measurements are made on the slope, the vertical angle determined with clinometer or transit, and the slope measurements properly reduced to true horizontal distances.

-----

PRELIMINARY FIELD TEST

of

Young and Sons Transit Instrument, No. 8584

February 10, 1931. At station near the north boundary of section 22, T. 8 S., R. 30 E., G. and S.R. Base and Meridian, Arizona, at approximate latitude  $32^{\circ}43\frac{1}{2}'$  N., and longitude  $109^{\circ}16'$  W., examine the adjustments of the instrument and correct all errors; then, to test the solar apparatus, by comparing its indications resulting from observations made during a.m. and p.m. hours, with a true meridian, obtained by observations on Polaris, proceed as follows:

At 10<sup>h</sup>11<sup>m</sup> p.m., l.m.t., observe Polaris at western elongation, making four observations, two each with the telescope in the direct and the reverse positions, and mark the line thus determined, with a tack, in a peg driven firmly in the ground, five chains north.

Azimuth of Polaris at western elongation is  $1^{\circ}15'37''$ .

February 11, lay off the azimuth of Polaris  $1^{\circ}15\frac{1}{2}'$  to the east, and mark the meridian thus determined, by a tack, in a peg driven firmly in the ground, five chains north.

At 9<sup>h</sup>00<sup>m</sup> app.t., with the latitude arc set at  $32^{\circ}43\frac{1}{2}'$  N., and the declination arc set at  $14^{\circ}09\frac{1}{2}'$  S., determine a meridian with the solar, which agrees within 1' of the true meridian.

At apparent noon, with the latitude arc unchanged, observe the sun on the meridian; the resultant reading of the declination arc is  $14^{\circ}07\frac{1}{2}'$  S.; which agrees with the computed declination of the sun.

At 3<sup>h</sup>00<sup>m</sup> p.m., app.t., with the latitude arc unchanged and the declination arc set at  $14^{\circ}04\frac{1}{2}'$  S., determine a meridian with the solar, which agrees within 1' of the true meridian.


As all of the solar observations taken during the usual hours of solar work, agree within 1' of the true meridian, it is concluded that the instrument is in satisfactory adjustment.

Survey of the East boundary of T. 8 S., R. 30 E.


Chains

From the original cor. of Tps. 8 and 9 S., Rs. 30 and 31 E., hereinafter described.  
 North, on a random line, setting temp.  $\frac{1}{4}$  sec. and sec. cors. at intervals of 40 chs., and at  
 481.96 Fall 1.40 chs. W. of the reestablished cor. of Tps. 7 and 8 S., Rs. 30 and 31 E., described in Book "C" of this group.

From the original cor. of Tps. 8 and 9 S., Rs. 30 and 31 E., established by H. F. Duval, U. S. Surveyor, in 1910, which is a malpais stone, 14 x 16 x 18 ins. above ground, marked with 6 notches on N., S., E. and W. edges, 31E on NE., 9S on SE., 30E on SW., and 8 S on NW. face, witnessed by a mound of stone, 4 ft. base, 2 ft. high, to S. of cor.  
 N.0°10'E., on true line bet. secs. 31 and 36.  
 Over NW. slope through scattering brush, desc. 291 ft.  
 20.70 Rocky wash, 100 lks. wide, course N.70°W.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, around post, for  $\frac{1}{4}$  sec. cor. of secs. 31 and 36, with brass cap marked




No bearing trees available.  
 40.80 Rocky wash, 30 lks. wide, course N.40°W.  
 50.00 Along gradual W. slope, over basin land.  
 74.00 Wash, 10 lks. wide, course W.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground, for cor. of secs. 25, 30, 31 and 36, with brass cap marked



No bearing trees available; raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling.  
 Soil, 3rd rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.  
 No timber.

N.0°10'E., on true line bet. secs. 25 and 30.  
 Over gradual W. slope, through scattering brush.  
 0.60 Wash, 40 lks. wide, course S.80°W.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 25 and 30, with brass cap marked



No bearing trees available; raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Survey of the East boundary of T. 8 S., R. 30 E.

Chains

42.60 Wash, 10 lks. wide, course S.70°W.  
 55.80 Small draw, course W.  
 71.50 Draw, course W.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 4 ft. base, 2 ft. high, around post, for cor. of secs. 19, 24, 25 and 30, with brass cap marked

T8S  
 R30E | R31E  
 S24 | S19  
 S25 | S30  
 1931

No bearing trees available.

Land, rolling.  
 Soil, 3rd rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.



N.0°10'E., on true line bet. secs. 19 and 24.  
 Over NW. slope, through low desert shrubbery, desc. slightly.

6.60 Small draw, course S.80°W., asc. 80 ft. over SW. slope.  
 29.20 Over gradual W. slope.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1½ ft. high, around post, for ¼ sec. cor. of secs. 19 and 24, with brass cap marked

¼  
 S24 | S19  
 1931


No bearing trees available.

52.10 Wash, 15 lks. wide, course W.  
 59.80 Road, brs. S.30°W. and N.30°E.  
 60.20 Wash, 20 lks. wide, course S. 30°W.  
 73.00 East slope of small hill, desc. slightly.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1½ ft. high, around post, for cor. of secs. 13, 18, 19 and 24, with brass cap marked

T8S  
 R30E | R31E  
 S13 | S18  
 S24 | S19  
 1931

No bearing trees available.

Land, rolling.  
 Soil, 3rd rate.  
 Undergrowth, mesquite, greasewood, cactus and sage.




Survey of the East boundary of T. 8 S., R. 30 E.

Chains


N.0°10'E., on true line bet. secs. 13 and 18.  
 Over gradual SE. slope, through low desert shrubbery,  
 asc. slightly.

3.60 Low ridge, brs. N.70°E., and S. 70°W., desc. 56 ft.  
 15.50 Draw, course S.30°W., asc. 107 ft. over S. slope.  
 34.60 Small draw, course S. 30°W.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in  
 the ground to bedrock; deposit a stone, marked with a  
 cross (x) at base, and raise a mound of stone, 3 ft.  
 base, 1½ ft. high, around post, for ¼ sec. cor. of secs.  
 13 and 18, with brass cap marked



No bearing trees available.

56.20 Low ridge, brs. N.45°W. and S.45°E., desc. slightly.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in  
 the ground to bedrock; deposit a stone, marked with a  
 cross (x) at base, and raise a mound of stone, 3 ft.  
 base, 1½ ft. high, around post, for cor. of secs. 7, 12,  
 13 and 18, with brass cap marked




No bearing trees available;

Land, rolling.  
 Soil, 3rd rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.  
 No timber.

N.0°10'E., on true line bet. secs. 7 and 12.  
 Over gradual SE. slope, through low desert shrubbery,  
 desc. slightly.

2.10 Small draw, course S.80°E., asc. 50 ft.  
 4.90 U.S. Highway No. 180, brs. E. and W.  
 13.80 Fence, brs. E. and W.  
 20.20 Low ridge, brs. N.80°E. and S. 80°W., desc. 111 ft.  
 32.15 Telephone line, brs. N.45°W. and S.45°E.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in  
 the ground to bedrock; deposit a stone, marked with a  
 cross (x) at base, and raise a mound of stone, 3 ft.  
 base, 1½ ft. high, around post, for ¼ sec. cor. of secs.  
 7 and 12, with brass cap marked



No bearing trees available.

50.70 Flat spur, slopes N.70°E., desc. 161 ft.  
 65.90 Bottom of canyon, course N.70°E., asc. 172 ft. over steep  
 SE. slope.

## Survey of the East boundary of T. 8 S., R. 30 E.

## Chains

71.60

80.00

Spur, slopes N.70°E., desc. 12 ft.

Set an iron post, 3 ft. long, 2 ins. in diam., over a mark (x) chiseled on rock ledge; raise a mound of stone, 6 ft. base, 2½ ft. high, around post, for cor. of secs. 1, 6, 7 and 12, with brass cap marked

. T8S  
R30E | R31E  
S1 | S6  
S12 | S7  
1931

No bearing trees available.

Land, rolling.

Soil, 3rd rate.

Undergrowth, greasewood, mesquite, cactus and sage.

N.0°10'E., on true line bet. secs. 1 and 6.

Over N. slope, through scattering desert shrubbery, desc. 64 ft.

10.80

Draw, course N.60°E., asc. 102 ft.

25.50

Ridge, brs. N.80°E. and S.80°W., desc. 186 ft.

36.70

Bottom of canyon, course N.45°E., asc. 78 ft.

37.50

Cliff, 20 ft. high, faces N.80°E., desc. 31 ft.

40.00

Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for ¼ sec. cor. of secs. 1 and 6, with brass cap marked

¼  
S1 | S6  
1931

No bearing trees available; raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Desc. 24 ft.

43.30

Draw, course S. 80°E., asc. 149 ft.

54.00

Spur, slopes E., desc. 143 ft.

60.40

Draw, course E., asc. 11 ft.

64.40

Point of spur, slopes E., desc. 13 ft.

66.60

Draw, course S. 70°E., asc. 129 ft.

68.40

Fence, brs. N.80°W. and S.80°E.

76.40

Ridge, brs. E. and W., desc. 132 ft. over N. slope.

81.96

The reestablished cor. of Tps. 7 and 8 S., Rs. 30 and 31 E., hereinafter described in book "C" of this group.

Land, rolling.

Soil, 3rd rate.

Undergrowth, mesquite, greasewood, cactus and sage.


Timber, a few scattering cedar.



Survey of the West boundary of T. 8 S., R. 30 E.

Chains


From the cor. of Tps. 8 and 9 S., Rs. 29 and 30 E., established by Karl L. Siebecker, U. S. Transitman, in 1920, which is an iron post, 3 ins. in diam., 18 ins. above ground, supported by a mound of stone, 4 ft. base, 1 1/2 ft. high, with brass cap marked



North, on true line bet. secs. 31 and 36.  
Over NW. slope, through scattering desert shrubbery, desc. 67 ft.


27.40 Small drain, course W., asc. over gradual SW. slope, 140 ft.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1 1/2 ft. high, around post, for 1/4 sec. cor. of secs. 31 and 36, with brass cap marked



No bearing trees available.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1 1/2 ft. high, around post, for cor. of secs. 25, 30, 31 and 36, with brass cap marked



No bearing trees available.


Land, rolling.  
Soil, 3rd rate.  
Undergrowth, greasewood, cactus and sage.

North, on true line bet. secs. 25 and 30.  
Over SW. slope, through scattering desert shrubbery, asc. slightly.

7.70 Thence over NW. slope, desc. 35 ft.

14.70 Small draw, course W., asc. over gradual SW. slope 50 ft.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1 1/2 ft. high, around post, for 1/4 sec. cor. of secs. 25 and 30, with brass cap marked



No bearing trees available.

## Survey of the West boundary of T. 8 S., R. 30 E.

## Chains

47.00 Thence over gradual NW. slope, desc. 73 ft.  
 57.70 Wash, 20 lks. wide, course S.30°W., asc. over gradual S.  
 slope, 40 ft.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in  
 the ground, for cor. of secs. 19, 24, 25 and 30, with  
 brass cap marked

T8S	
R29E	R30E
S24	S19
S25	S30
1931	

No bearing trees available; raise a mound of stone, 3 ft.  
 base, 1½ ft. high, W. of cor.

Land, rolling.  
 Soil, 3rd rate.  
 Undergrowth, greasewood, cactus and sage.  
 No timber.

3.00 North, on true line bet. secs. 19 and 24.  
 21.80 Over general S. slope, through scattering desert shrub-  
 bery, asc. gradually 110 ft.  
 40.00 Wash, 10 lks. wide, course S.10°E.  
 Same wash, course S.10°W.  
 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in  
 the ground to bedrock; deposit a stone, marked with a  
 cross (x) at base, and raise a mound of stone, 4 ft.  
 base, 2 ft. high, around post, for ¼ sec. cor. of secs.  
 19 and 24, with brass cap marked

¼	
S24	S19
1931	

59.00 No bearing trees available.  
 80.00 Wire fence, brs. N.60°W. and S.60°E.  
 Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in  
 the ground to bedrock; deposit a stone, marked with a  
 cross (x) at base, and raise a mound of stone, 4 ft.  
 base, 2 ft. high, around post, for cor. of secs. 13, 18,  
 19 and 24, with brass cap marked

T8S	
R29E	R30E
S13	S18
S24	S19
1931	

No bearing trees available.


Land, rolling.  
 Soil, 3rd rate.  
 Undergrowth, greasewood and cactus.  
 No timber.

North, on true line, bet. secs. 13 and 18.  
 Over slightly rolling ground, through scattering desert  
 shrubbery,

Survey of the West boundary of T. 8 S., R. 30 E.

Chains  
29.50  
35.00  
40.00


Wash, 60 lks. wide, course S.70°W.  
Dim road, brs. N.50°E. and S.50°W.  
Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in  
the ground, for 1/4 sec. cor. of secs. 13 and 18, with  
brass cap marked



No bearing trees available; raise a mound of stone, 3 ft.  
base, 2 ft. high, W. of cor.

45.60  
50.00  
62.90  
80.00

Dim road, brs. E. and W.  
Foot of S. slope, asc. 92 ft.  
Top of low hill, desc. 84 ft. over NW. slope.  
Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in  
the ground to bedrock; deposit a stone, marked with a  
cross (x) at base, and raise a mound of stone, 4 ft.  
base, 2 ft. high, around post, for cor. of secs. 7, 12,  
13 and 18, with brass cap marked




No bearing trees available.  
Land, rolling.  
Soil, 3rd rate.  
UNDERgrowth, greasewood and cactus.  
No timber.

-----  
North, on true line bet. secs. 7 and 12.  
Over NW. slope, through scattering desert shrubbery, desc.  
30 ft.

4.30  
21.00  
26.50  
34.00  
40.00


Draw, course S.30°W., asc. 191 ft. over SE. slope.  
Head of same draw, course S.20°E.  
Thence over SW. slope.  
Head of draw, course S.50°W.  
Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in  
the ground, for 1/4 sec. cor. of secs. 7 and 12, with brass  
cap marked



No bearing trees available; raise a mound of stone, 3 ft.  
base, 2 ft. high, W. of cor.

44.00  
49.50  
60.70  
80.00

Spur, slopes W., desc. 82 ft.  
Draw, course W., asc. 130 ft.  
Ridge, brs. N.40°W. and S.40°E., desc. 254 ft.  
Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in  
the ground, for cor. of secs. 1, 6, 7 and 12, with brass  
cap marked



Survey of the West boundary of T. 8 S., R. 30 E.


Chains

No bearing trees available; raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
 Land, rolling hills.  
 Soil, 4th rate.  
 Undergrowth, greasewood, mesquite and cactus.  
 Timber, scattering cedar.




North, on true line bet. secs. 1 and 6.  
 Over N. slope, through scattering desert shrubbery, desc. 11 ft.


- 6.00 Wash, 160 lks. wide, course S.60°W., asc. 165 ft. over general S. slope.
- 8.20 Dim road, course N.20°E.
- 33.50 Spur, slopes S.60°E., desc. 75 ft. over NE. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground, to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1½ ft. high, around post, for ¼ sec. cor. of secs. 1 and 6, with brass cap marked



- 40.70 No bearing trees available.
- 46.90 Draw, course S.70°E., asc. 241 ft. over S. slope.
- 56.60 U. S. Highway No. 180, brs. E. and W.
- 71.70 Thence over SW. slope.
- 76.70 Spur, slopes N.70°W., desc. 79 ft. over NE. slope.
- 81.96 Telephone line, brs. E. and W.
- A point theoretically W. of the reestablished cor. of Tps. 7 and 8 S., Rs. 30 and 31 E.;
- Set an iron post, 3 ft. long, 3 ins. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1½ ft. high, around post, for cor. of Tps. 7 and 8 S., Rs. 29 and 30 E., with brass cap marked



No bearing trees available.  
 Land, rolling hills.  
 Soil, 3rd rate.  
 Undergrowth, mesquite, cactus and sage.  
 Timber, cedar.



Survey of the North boundary of T. 8 S., R. 30 E.

Chains											
478.87	<p>From the cor. of Tps. 7 and 8 S., Rs. 29 and 30 E., here- inbefore described. East, on a random line on north boundary of township. Set Temp. <math>\frac{1}{4}</math> sec. cor. at 38.88 chs., and thence temp. sec. and <math>\frac{1}{4}</math> sec. cors. at intervals of 40 chs., and at Fall 14 lks. S. of the reestablished cor. of Tps. 7 and 8 S., Rs. 30 and 31 E., described in Book "C" of this group. Thence, S. <math>89^{\circ}59'</math> W., on true line bet. secs. 1 and 36. Over rocky NE. slope, through scattering desert shrub- bery, asc. 176 ft. Wire fence, brs. N <math>60^{\circ}</math> W. and S <math>60^{\circ}</math> E. Spur, slopes N., desc. 35 ft. Draw, course N. <math>10^{\circ}</math> E., asc. 188 ft. over E. slope. Set an iron post, 3 ft. long, 1 in. in diam., over a cross (x) chiseled on rock ledge; raise a mound of stone, 6 ft. base, 3 ft. high, around post, for <math>\frac{1}{4}</math> sec. cor. of secs. 1 and 36, with brass cap marked</p>										
29.60	$\frac{1}{4} \frac{S \ 36}{S \ 1}$ <p>1931</p>										
30.00	No bearing trees available.										
39.60	Spur, slopes N. $10^{\circ}$ E., desc. 198 ft. over NW. slope.										
40.00	Wire fence, brs. N. $60^{\circ}$ E. and S. $60^{\circ}$ W.										
48.20	Dry bed of Ash Creek, 100 lks. wide, course N. $30^{\circ}$ E., asc. 220 ft. over SE. slope.										
52.90	Set an iron post, 3 ft. long, 2 ins. in diam., 6 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 6 ft. base, $2\frac{1}{2}$ ft. high, around post, for cor. of secs. 1, 2, 35 and 36, with brass cap marked										
63.90	<table border="1"> <tr><td>T7S</td><td>R30E</td></tr> <tr><td>S35</td><td>S36</td></tr> <tr><td>S2</td><td>S1</td></tr> <tr><td>T8S</td><td>S1</td></tr> <tr><td colspan="2">1931</td></tr> </table>	T7S	R30E	S35	S36	S2	S1	T8S	S1	1931	
T7S	R30E										
S35	S36										
S2	S1										
T8S	S1										
1931											
80.00	No bearing trees available.										
2.40	Land, rolling hills.										
15.70	Soil, 4th rate.										
26.20	Undergrowth, mesquite, cactus and sage.										
40.00	Timber, cedar.										
2.40	S. $89^{\circ}59'$ W., on true line bet. secs. 2 and 35.										
15.70	Over SE. slope, through scattering desert shrubbery, asc. 15 ft.										
26.20	Point of spur, slopes S., desc. 94 ft.										
40.00	Drain, course S., thence along S. slope.										
40.00	Small pump house, brs. S. approximately five chains dist.										
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 4 ft. base, 2 ft. high, around post, for $\frac{1}{4}$ sec. cor. of secs. 2 and 35, with brass cap marked										
40.38	$\frac{1}{4} \frac{S \ 35}{S \ 2}$ <p>1931</p>										
40.38	No bearing trees available. Intersect NE. side line of Summit Mill Site, N. $68^{\circ}02'$ W.										

Survey of the North boundary of T. 8 S., R. 30 E.

Chains

- 1.87 chs. dist., from cor. No. 1, of Summit MS., identical with cor. No. 4, of Commerce MS., which is a pine post, 4 x 4 x 48 ins., set in a cone of concrete, marked on NW., COR No 1 SUM MS, and on SE., COR No 4 COM MS SUR 3076B.
- 43.10 Dry bed of Ash Creek, 100 lks. wide, course S.80°E., asc. 60 ft.
- 49.14 Intersect SW. side line of Summit Mill Site, S.68°02'E., 4.90 chs. dist. from cor. No. 3 of Summit MS., which is a pine post, 4 x 4 x 48 ins., set in a cone of concrete and marked on SE. face, COR No 3 SUM MS SUR 3076B.
- 49.15 U.S. Geological Survey BM., elevation 4184 ft. above sea level, brs. N. 2.59 chs. dist.  
Saunders Ranch House, brs. N. 3.50 chs. dist.
- 50.51 Spring, brs. N. 1.75 chs. dist.
- 61.80 A well, brs. N. approximately 3 chs. dist.
- 65.50 Road, brs. N.45°E. and S. 45°W.
- 67.60 Wash, 60 lks. wide, course N.80°E., continue up wash.
- 73.00 Leave wash, thence over level ground.
- 76.80 Same wash, course S. 70°E.
- 79.50 Wash, 20 lks. wide, course N.70°E.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1½ ft. high, around post, for cor. of secs. 2, 3, 34 and 35, with brass cap marked

T7S | R30E  
S34 | S35  
S3 | S2  
T8S1  
1931

No bearing trees available.

Land, rolling.  
Soil, 3rd rate.  
Undergrowth, mesquite, greasewood, cactus and sage.  
No timber.

- 9.80 S.89°59'W., on true line bet. secs. 3 and 34.  
Over level ground, through scattering desert shrubbery.  
Wash, 60 lks. wide, course N.80°E., asc. 91 ft. over SE. slope.
- 30.30 Small spur, slopes S., desc. 34 ft.
- 37.00 Small draw, course S.10°E., asc. 128 ft. over SE. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 3 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 5 ft. base, 2½ ft. high, around post, for ¼ sec. cor. of secs. 3 and 34, with brass cap marked

¼ S 34  
S 3  
1931

- 58.10 No bearing trees available.  
Spur, slopes S., desc. 112 ft.
- 73.50 Drain, course S., thence along S. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1½ ft. high, around post, for cor. of secs. 3, 4, 33 and 34, with brass cap marked

Survey of the North boundary of T. 8 S., R. 30 E.

Chains

T7S	R30E
S33	S34
S4	S3
T8S	
1931	

No bearing trees available.

Land, rolling.

Soil, 3rd rate.

Undergrowth, mesquite, cactus and sage.



S.89°59'W., on true line bet. secs. 4 and 33.

Over gradual S. slope, through scattering desert shrubbery.

8.10  
20.00  
40.00

Road, brs. N.45°W. and S.45°E.

Thence, over SE. slope, asc. 80 ft.

Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 4 and 33, with brass cap marked

$\frac{1}{4}$	S 33
	S 4
1931	

No bearing trees available; raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

49.50  
56.60  
56.78  
57.50  
61.10  
80.00

U.S. Highway No. 180, brs. N.80°W. and S.80°E.

Corral fence, brs. N. and S.

U.S. Geological Survey BM., elevation 4398 ft. above sea level, brs. N. 10 lks. dist.

Ash Peak Garage, brs. N. 2 chs. dist.

Wire fence, brs. N. and S.

Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$  ft. high, around post, for cor. of secs. 4, 5, 32 and 33, with brass cap marked


T7S	R30E
S32	S33
S5	S4
T8S	
1931	

No bearing trees available.

Land, rolling.

Soil, 2nd rate.

Undergrowth, greasewood, mesquite and cactus.



S.89°59'W., on true line bet. secs. 5 and 32.

Over gradual N. slope, through scattering desert shrubbery.

27.40  
33.90  
40.00

Wash, 15 lks. wide, course N.10°W.

Telephone line, brs. N.80°W.

Set an iron post, 3 ft. long, 1 in. in diam., 4 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 4 ft. base, 2 $\frac{1}{2}$  ft. high, around post, for  $\frac{1}{4}$  sec. cor. of secs. 5 and 32, with brass cap marked

$\frac{1}{4}$	S 32
	S 5
1931	

## Survey of the North boundary of T. 8 S., R. 30 E.

## Chains

No bearing trees available.  
 Desc. 50 ft. over NW. slope.  
 Drain, course N.45°W.  
 44.20 Enter wash, from N.45°E., thence follow down wash.  
 53.90 Leave wash, 150 lks. wide, course N.80°W.  
 78.60 Set an iron post, 3 ft. long, 2 ins. in diam., 6 ins. in  
 80.00 the ground to bedrock; deposit a stone, marked with a  
 cross (x) at base, and raise a mound of stone, 5 ft.  
 base, 2 ft. high, around post, for cor. of secs. 5, 6,  
 31 and 32, with brass cap marked

T7S, R30E	
S31	S32
S6	S5
T8S	
1931	

No bearing trees available.

Land, rolling.  
 Soil, 2nd rate.  
 Undergrowth, mesquite, cactus and sage.  
 No timber.

-----  
 S.89°59'W., on true line bet. secs. 6 and 31.  
 Over NW. slope, through scattering desert shrubbery, desc.  
 20 ft.

2.40 Well, brs. N. 3 chs. dist.  
 3.20 Bosco's house, brs. N.3.50 chs. dist.  
 3.70 Enter wash, 150 lks. wide, course S.85°W.  
 8.90 Leave wash, asc. 70 ft. over SE. slope.  
 39.50 U.S. Highway No. 180, brs. N.60°E. and S.60°W.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 4 ins. in  
 the ground, to bedrock; deposit a stone, marked with a  
 cross (x) at base, and raise a mound of stone, 4 ft.  
 base, 3 ft. high, around post, for  $\frac{1}{4}$  sec. cor. of secs.  
 6 and 31, with brass cap marked

$\frac{1}{4}$	S 31
	S 6
	1931

No bearing trees available.  
 56.30 Spur, slopes S.10°E., desc. 170 ft. over SW. slope.  
 71.40 Draw, course S. 20°E., asc. 70 ft. over NE slope.  
 78.87 The cor. of Tps. 7 and 8 S., Rs. 29 and 30 E., herein-  
 before described.


Land, rolling hills.  
 Soil, 4th rate.  
 Undergrowth, mesquite, cactus and sage.  
 No timber.



Survey of subdivisions, T. 8 S., R. 30 E.


Chains

From the cor. of secs. 1, 2, 35 and 36, on S. bdy. of Tp., established in 1920, which is an iron post, 2 ins. in diam., 18 ins. above ground, supported by a mound of stone, 3 ft. base, 1 1/2 ft. high, and with brass cap marked




N.0°09'E., on true line bet. secs. 35 and 36. Over gradual SE. slope, through low desert shrubbery, asc. slightly.

17.00 East end of low ridge, brs. W. about 3 chs. dist.  
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for 1/4 sec. cor. of secs. 35 and 36, with brass cap marked



No bearing trees available; raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.

50.00 Drain, course S.10°E.  
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, with brass cap marked.




No bearing trees available; raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling.  
Soil, 1st and 2nd rate.  
Undergrowth, greasewood, cactus and sage.

40.00 East, on a random line, bet. secs. 25 and 36.  
79.80 Set temp. 1/4 sec. cor.  
Fall 26 lks. S. of the cor. of secs. 25, 30, 31 and 36, hereinbefore described.

Thence, S.89°49'W., on true line bet. secs. 25 and 36. Over gradual SW. slope, through low desert shrubbery, desc. 10 ft.

24.50 Drain, course S. 20°W.  
30.30 Small reservoir, brs. S. approximately 5 chs. dist.  
34.20 Dim road, brs. N.10°E. and S.10°W.  
39.90 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for 1/4 sec. cor. of secs. 25 and 36, with brass cap marked



No bearing trees available; raise a mound of stone, 3 ft. base, 1 1/2 ft. high, N. of cor.

Survey of subdivisions, T. 8 S., R. 30 E.

Chains  
67.50  
79.80

Wash, 20 lks. wide, course S.30°E., asc. 30 ft.  
The cor. of secs. 25, 26, 35 and 36.

Land, rolling.  
Soil, 1st and 2nd rate.  
Undergrowth, greasewood, mesquite, cactus and sage.  
No timber.

N.0°09'E., on true line bet. secs. 25 and 26.  
Over gradual SE. slope, through low desert shrubbery, asc. 120 ft.

15.60 Wash, 20 ft. wide, course S.20°E.  
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1½ ft. high, around post, for ¼ sec. cor. of secs. 25 and 26, with brass cap marked

¼  
S26 | S25  
1931

78.90 No bearing trees available.  
80.00 Dim road, brs. N.80°E. and S.80°W.  
Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 23, 24, 25 and 26, with brass cap marked

T8S, R30E  
S23 | S24  
S26 | S25  
1931

No bearing trees available; raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, slightly rolling.  
Soil, 2nd rate.  
Undergrowth, greasewood, cactus and sage.  
No timber.

40.00 N.89°49'E., on a random line, bet. secs. 24 and 25.  
79.80 Set temp. ¼ sec. cor.  
Intersect cor. of secs. 19, 24, 25 and 30, hereinbefore described.  
Thence,  
S.89°49'W., on true line bet. secs. 24 and 25.  
Over gradual W. slope, through low desert shrubbery, desc. 40 ft.

16.60 Wash, 30 lks. wide, course S.  
25.40 Wash, 30 lks. wide, course S.10°E., asc. 150 ft. over gradual SE. slope.  
39.90 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1½ ft. high, around post, for ¼ sec. cor. of secs. 24 and 25, with brass cap marked

¼ S 24  
S 25  
1931

Survey of subdivisions, T. 8 S., R. 30 E.


Chains

No bearing trees available.  
 40.20 Drain, course S.40°E.  
 47.40 Dim road, brs. N.30°W. and S.30°E.  
 59.50 Wash, 5 lks. wide, S.40°E.  
 72.40 Dim road, brs. N.80°E. and S.80°W.  
 79.80 The cor. of secs. 23, 24, 25 and 26.


Land, slightly rolling.  
 Soil, 2nd rate.  
 Undergrowth, greasewood, mesquite and cactus.

-----

N.0°09'E., on true line bet. secs. 23 and 24.  
 Over SE. slope, through low desert shrubbery, asc. 172 ft.  
 29.50 Wash, 10 lks. wide, course S.30°E.  
 34.30 Drain, course S.20°E.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 4 ft. base, 1½ ft. high, around post, for ¼ sec. cor. of secs. 23 and 24, with brass cap marked



No bearing trees available.  
 From this cor., bdy. post No. 22, bet. Graham and Greenlee Counties, brs. N.42°04'W., 10.20 chs. dist., a granite stone, 8 x 8 x 8 ins. above ground, marked, GRA on W., GRE on E., and 22 on S., with a mound of stone, to N.  
 From mile post No. 22, a county line monument, which is a granite boulder, 30 x 14 x 6 ins. above ground, marked 18-5592 on S., GRA on W., and GREE on E., brs. S.11°47'E., 237.49 chs. dist.,  
 40.60 Previously mentioned drain, brs. S.30°W.  
 56.50 West slope of hill, desc. 92 ft.  
 62.00 Draw, course S.70°W., asc. 50 ft.  
 75.00 Low ridge, brs. N.60°W. and S.60°E., desc. 37 ft.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 4 ft. base, 1½ ft. high, around post, for cor. of secs. 13, 14, 23 and 24, with brass cap marked



No bearing trees available.  
 Land, slightly rolling.  
 Soil, 2nd rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.

-----

N.89°49'E., on a random line, bet. secs. 13 and 24.  
 40.00 Set temp. ¼ sec. cor.  
 79.76 Fall 2 lks. S. of the cor. of secs. 13, 18, 19 and 24, hereinbefore described.  
 Thence,

## Survey of subdivisions T. 8 S., R. 30 E.

## Chains

S.  $89^{\circ}48'W.$ , on true line bet. secs. 13 and 24.  
 Over E. slope, through scattering desert shrubbery, asc. 13 ft.  
 0.80 Low ridge, brs. N.  $10^{\circ}W.$  and S.  $10^{\circ}E.$ , desc. 103 ft.  
 17.60 Draw, course S.  $10^{\circ}E.$ ,  
 18.90 Draw, course S.  $40^{\circ}E.$ , asc. 115 ft.  
 39.88 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 4 ft. base,  $1\frac{1}{2}$  ft. high, around post, for  $\frac{1}{4}$  sec. cor. of secs. 13 and 24, with brass cap marked

$$\begin{array}{r} \frac{1}{4} S 13 \\ \frac{1}{4} S 24 \\ \hline 1931 \end{array}$$

No bearing trees available.  
 40.20 Top of hill, desc. 129 ft.  
 51.50 Draw, course S.  $10^{\circ}E.$ , asc. 30 ft.  
 57.80 Low spur, slopes S., desc. 27 ft.  
 64.00 Draw, course S.  $30^{\circ}E.$ , asc. 75 ft. over NE. slope.  
 72.00 Thence along N. slope.  
 79.76 The cor. of secs. 13, 14, 23 and 24.

Land, rolling.  
 Soil, 3rd rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.

N.  $0^{\circ}09'E.$ , on true line bet. secs. 13 and 14.  
 Over N. slope, through scattering desert shrubbery, desc. 20 ft.  
 2.70 Draw, course S.  $80^{\circ}E.$ , asc. 104 ft.  
 15.00 Spur, slopes S.  $45^{\circ}E.$ , desc. 69 ft.  
 25.10 Head of draw, course S.  $70^{\circ}E.$ , asc. 433 ft. over SE. slope.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 13 and 14, with brass cap marked

$$\begin{array}{r} \frac{1}{4} \\ S14 | S13 \\ \hline 1931 \end{array}$$

No bearing trees available; raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
 62.60 Head of draw, course S.  $30^{\circ}E.$   
 74.50 High ridge, brs. N.  $60^{\circ}W.$  and S.  $60^{\circ}E.$ , desc. 97 ft.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for cor. of secs. 11, 12, 13 and 14, with brass cap marked

$$\begin{array}{r} T8S R30E \\ S11 | S12 \\ S14 | S13 \\ \hline 1931 \end{array}$$


No bearing trees available; raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, hilly.  
 Soil, 4th rate.  
 Undergrowth, mesquite, cactus and sage.

Survey of subdivisions T. 8 S., R. 30 E.

Chains


40.00 N.89°48'E., on a random line, bet. secs. 12 and 13.  
 Set temp. ¼ sec. cor.  
 79.80 Fall 12 lks. S. of cor. of secs. 7, 12, 13 and 18, herein before described.  
 Thence, S.89°43'W., on true line bet. secs. 12 and 13.  
 Over gradual NE. slope, through scattering brush, asc. 130 ft.  
 11.50 Gravel pit, 2 chs. wide, brs. N. 50 lks. dist.  
 31.30 Head of draw, course N.20°E.  
 39.90 On low ridge, bearing N.40°W. and S.10°E.,  
 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1½ ft. high, around post, for ¼ sec. cor. of secs. 12 and 13, with brass cap marked




No bearing trees available.  
 Desc. 81 ft. over SW. slope.  
 56.40 Draw, course S.70°E., asc. 250 ft. over NE. slope.  
 79.80 The cor. of secs. 11, 12, 13 and 14.

Land, rolling hills.  
 Soil, 3rd and 4th rate.  
 Undergrowth, mesquite cactus and sage.

9.40 N.0°09'E., on true line bet. secs. 11 and 12.  
 30.30 Over NE. slope, through scattering brush, desc. 187 ft.  
 40.00 Draw, course S.80°E., asc. 109 ft.  
 Ridge, brs. N.80°W. and S.80°E., desc. 136 ft.  
 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1½ ft. high, around post, for ¼ sec. cor. of secs. 11 and 12, with brass cap marked



No bearing trees available.  
 41.60 Draw, course S.80°E., asc. 87 ft.  
 50.20 Spur, slopes E., desc. 154 ft.  
 58.60 U.S. Highway No. 180, brs. E. and W.  
 63.10 Draw, course N.10°E.  
 77.70 Fence, brs. E. and W.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 6 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 5 ft. base, 2½ ft. high, around post, for cor. of secs. 1, 2, 11 and 12, with brass cap marked



No bearing trees available.  
 Land, rolling hills.  
 Soil, 3rd and 4th rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.


## Survey of subdivisions T. 8 S., R. 30 E.

Chains	
	N.89°43'E., on a random line, bet. secs. 1 and 12.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.76	Fall 2 lks. N. of the cor. of secs. 1, 6, 7, and 12, hereinbefore described.
	Thence,
	S.89°44'W., on true line bet. secs. 1 and 12.
	Over NW. slope, through scattering brush, desc. slightly.
5.80	Small drain, course N.20°W., asc. 143 ft. over NE. slope.
22.20	Low ridge, brs. N.80°W. and S.80°E., desc. 44 ft.
37.80	Small draw, course S.70°E., asc. 105 ft. over over gradual NE. slope.
39.88	Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, around post, for $\frac{1}{4}$ sec. cor. of secs. 1 and 12, with brass cap marked
	$\frac{1}{4}$ $\frac{S 1}{S 12}$ 1931
	No bearing trees available.
52.20	Telephone line, brs. N.60°W. and S.60°E.
62.80	Spur, slopes W.30°E., desc. 133 ft. over W. slope.
73.40	Draw, course N., asc. 91 ft.
79.76	The cor. of secs. 1, 2, 11 and 12.
	Land, rolling hills. Soil, 3rd and 4th rate. Undergrowth, mesquite, cactus and sage. Timber, scattering cedar.
	-----
	N.0°09'E., on a random line, bet. secs. 1 and 2.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
82.40	Fall 33 lks. E. of the cor. of secs. 1, 2, 35 and 36, hereinbefore described.
	Thence,
	S.0°05'E., on true line bet. secs. 1 and 2.
	Over S. slope, through scattering brush, desc. 178 ft.
11.00	Line passes over small shed.
11.60	A house brs. W. about 80 lks. dist.
11.90	A house brs. W. about 120 lks. dist.
14.00	Dry bed of Ash Creek, 100 lks. wide, course S.70°E., asc. 228 ft.
39.10	Low ridge, brs. E. and W., desc. 174 ft.
42.40	Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base; and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, around post, for $\frac{1}{4}$ sec. cor. of secs. 1 and 2, with brass cap marked
	$\frac{1}{4}$ S2   S1 1931
	No bearing trees available.
53.40	Draw, course E., asc. 59 ft.
58.60	Spur, slopes E., desc. 65 ft.
61.70	Draw, course E., asc. 176 ft. over NE. slope.
67.20	Telephone line, brs. E. and W.
78.30	Thence along E. slope.
82.40	The cor. of secs. 1, 2, 11 and 12.
	Land, rolling hills. Soil, 3rd rate, Undergrowth, mesquite cactus and sage.

Survey of subdivisions T. 8 S., R. 30 E.

Chains

From the cor. of secs. 2, 3, 34 and 35, on S. bdy. of township, established in 1920, which is an iron post, 2 ins. in diam., 18 ins. above ground, in a mound of stone, 3 ft. base, 1 1/2 ft. high, with brass cap marked.




4.00 N. 0° 09' E., on true line bet. secs. 34 and 35. Over gradual E. slope, through scattering brush. Wash, 10 lks. wide, course S. 40° E., asc. 239 ft. over SW. slope.

29.10 Spur, slopes E., desc. 192 ft.

37.50 Foot of slope, thence over level ground.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for 1/4 sec. cor. of secs. 34 and 35, with brass cap marked




45.40 No bearing trees available; raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.

54.40 Wash, 20 lks. wide, course S. 80° E.

65.80 Wire fence, brs. N. 60° W. and S. 60° E.

80.00 Wash, 30 lks. wide, course S. 40° E., asc. 20 ft.

Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground, for cor. of secs. 26, 27, 34 and 35, with brass cap marked



No bearing trees available; raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.

Land, slightly rolling.  
Soil, 2nd and 4th rate.  
Undergrowth, greasewood, mesquite, cactus and sage.


40.00 East, on a random line, bet. secs. 26 and 35.

80.14 Set temp. 1/4 sec. cor. Fall 18 lks. N. of the cor. of secs. 25, 26, 35 and 36. Thence, N. 89° 52' W., on true line bet. secs. 26 and 35. Over gradual SE. slope, through low brush. Wash, 50 lks. wide, course S.

27.10 Dim road, brs. N. 40° E. and S. 40° W.

35.90 Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for 1/4 sec. cor. of secs. 26 and 35, with brass cap marked

40.07



No bearing trees available; raise a mound of stone, 3 ft. base, 1 1/2 ft. high, N. of cor.

## Survey of subdivisions T. 8 S., R. 30 E.

## Chains

Asc. 35 ft.  
 75.40 Wash, 30 lks. wide, course S. 30°E.  
 77.90 Dim road, brs. N.20°W. and S. 20°E.  
 80.14 The cor. of secs. 26, 27, 34 and 35.

Land, slightly rolling.  
 Soil, 2nd rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.

-----  
 N.0°09'E., on true line bet. secs. 26 and 27.  
 Over level ground, through scattering brush.  
 3.50 Dim road, brs. N.20°W. and S.20°E.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in  
 the ground, for  $\frac{1}{4}$  sec. cor. of secs. 26 and 27, with  
 brass cap marked

$\frac{1}{4}$   
 S27 | S26  
 1931

No bearing trees available; raise a mound of stone, 3 ft.  
 base,  $1\frac{1}{2}$  ft. high, W. of cor.  
 Asc. 100 ft. over gradual S. slope.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., over a  
 cross (x) chiseled on surface of rock ledge; raise a  
 mound of stone, 6 ft. base, 3 ft. high, around post,  
 for cor. of secs. 22, 23, 26 and 27, with brass cap  
 marked

T8S R30E  
 S22 | S23  
 S27 | S26  
 1931

No bearing trees available.

Land, slightly rolling.  
 Soil, 2nd rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.

-----  
 S.89°52'E., on a random line, bet. secs. 23 and 26.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.14 Intersect cor. of secs. 23, 24, 25 and 26.  
 Thence,  
 N.89°52'W., on true line bet. secs. 23 and 26.  
 Over slightly rolling ground, through low desert shrub-  
 bery.  
 5.60 Road, brs. N.70°W. and S.70°E.  
 7.70 Same road, brs. N.60°E. and S.60°W.  
 17.00 Wash, 40 lks. wide, course S.  
 23.30 Dim road, brs. N.40°W. and S.40°E.  
 30.70 Wash, 10 lks. wide, course S.  
 40.07 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in  
 the ground to bedrock; deposit a stone, marked with a  
 cross (x) at base, and raise a mound of stone, 3 ft.  
 base,  $1\frac{1}{2}$  ft. high, for  $\frac{1}{4}$  sec. cor. of secs. 23 and 26,  
 with brass cap marked

$\frac{1}{4}$   $\frac{S\ 23}{S\ 26}$   
 1931




Survey of Subdivisions of T.8 S., R.30 E.

Chains

No bearing trees available.

- 54.50 Drain, course SE.
- 76.60 Wash, 40 lks. wide, course S.10°E.
- 80.14 The cor. of secs. 22, 23, 26 and 27.


Land: slightly rolling.  
 Soil: 2nd rate.  
 No timber. Undergrowth: mesquite, greasewood, cactus, sage.



N.0°09'E., on true line, bet. secs. 22 and 23.  
 Over gradual SE. slope, through low desert shrubbery;  
 asc. 170 ft.


- 15.30 Wash, 30 lks. wide, course S.20°E.
- 22.50 Road, bears SE. and NW.
- 25.00 Left bank of wash, bears S.10°W.
- 28.00 Leave wash on same side, bears S.10°E.
- 36.30 Same wash, course S.10°W.

- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.




and raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor.

- 56.60 Same wash, course S.20°E.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (+) at base, and raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$  ft. high, around post, for cor. of secs. 14, 15, 22 and 23, with brass cap marked



Land: slightly rolling.  
 Soil: 2nd rate.  
 No timber. Undergrowth: mesquite, cactus, greasewood, sage.



- 40.00 S.89°52'E., on random line, bet. secs. 14 and 23. Set temp.  $\frac{1}{4}$  sec. cor.
- 80.14 Fall 2 lks. S. of the cor. of secs. 13, 14, 23, and 24.

Thence N.89°53'W., on true line, bet. secs. 14 and 23.  
 Over N. slope; through scattering desert shrubbery.

- 5.60 Low saddle in ridge, bearing N.50°W. and S.50°E.; asc. 44 ft. over SE. slope.
- 20.50 Low spur, slopes S.; desc. 83 ft.
- 32.70 Draw, course S.

- 40.07 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (+) at base, and raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$  ft. high, around post, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

Chains

1 S144 S23

1931

- 40.60 Draw, course SE.  
 50.00 Same draw, course N.70°E.  
 60.90 Small draw, course S.80°E.  
 77:90 Small draw, course S.20°E.

80.14 The cor. of secs. 14, 15, 22, and 23.

Land: rolling.

Soil: 3rd rate.

No timber. Undergrowth: mesquite, greasewood, cactus and sage.

-----  
 N.0°09'E., on true line, bet. secs. 14 and 15.

Asc. 126 ft. over SE. slope; through scattering desert shrubbery.

27.00 Low spur, slopes S.30°W.; desc. 30 ft.

34.80 Head of draw, course S.40°W.; asc. 30 ft.

39.50 Low ridge, bears N.20°W. and S.20°E.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bedrock, deposit a stone, marked with a cross (+) at base, and raise a mound of stone, 5 ft. base, 2½ ft. high, around post, for ¼ sec. cor., with brass cap marked

¼

S15 | S14

1931

Desc. 90 ft.

59.80 Draw, course S.70°E.; asc. 130 ft.

71.00 Spur, slopes SE.; along E. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 4 ins. in the ground to bedrock; deposit a stone, marked with a cross (+) at base, and raise a mound of stone, 5 ft. base, 2½ ft. high, around post, for cor. of secs. 10, 11, 14 and 15, with brass cap marked

T8S R30E

S10 | S11

S15 | S14

1931

Land: rolling hills.

Soil: rocky, 3rd rate.

No timber. Undergrowth: scrub cedar, mesquite, cactus.

-----  
 S.89°53'E., on random line, bet. secs. 11 and 14.

40.00 Set temp. ¼ sec. cor.

80.00 Fall 2 lks. N. of the cor. of secs. 11, 12, 13, and 14.

Thence


N.89°52'W., on true line, bet. secs. 11 and 14.

Over NE. slope; through scattering undergrowth; asc. 96 ft.

Survey of subdivisions, T. 8 S., R. 30 E.

Chains


5.00 Ridge, brs. N.40°W. and S. 40°E., desc. 284 ft.  
 25.60 Draw, course S.20°E., asc. 171 ft.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1½ ft. high, around post, for ¼ sec. cor. of secs. 11 and 14, with brass cap marked




44.00 No bearing trees available.  
 Spur, slopes S.79°E., desc. 144 ft.  
 74.50 Draw, course S.50°E., asc. 55 ft.  
 80.00 The cor. of secs. 10, 11, 14 and 15.

Land, mountainous.  
 Soil, rocky; 4th rate.  
 Undergrowth, mesquite and cactus.

2.40 N.0°09'E., on true line bet. secs. 10 and 11.  
 Over NE. slope, through scattering brush, desc. 49 ft.  
 13.80 Draw, course S.60°E., asc. 279 ft.  
 High rocky ridge, brs. N.80°W. and S.80°E., desc. 107 ft. over cliff facing N.  
 19.60 Head of draw, course N.80°E., asc. 77 ft.  
 29.40 Spur, slopes E., desc. 79 ft.  
 33.90 Draw, course E., asc. 106 ft.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 4 ft. base, 2 ft. high, around post, for ¼ sec. cor. of secs. 10 and 11, with brass cap marked



75.31 No bearing trees available.  
 This cor. falls on ridge, bearing N.40°E and S.40°W., Desc. 239 ft. over N. slope.  
 Intersect SW. side line of Summit Mining Claim, S.60°00'E., 9.39 chs. dist. from cor. No. 3, of this claim, which is a pine post, 4 x 4 x 48 ins. above ground, set in a conical base of concrete, marked on SE. face, S3-3076A., and on NW. face, H2.  
 76.30 Draw, course N.70°W., asc. 33 ft.  
 78.60 Mine shaft and engine room, brs. E. 2 chs. dist.  
 79.80 Old mine shop building brs. E. 2 chs. dist.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 4 ft. base, 2 ft. high, around post, for cor. of secs. 2, 3, 10 and 11, with brass cap marked



No bearing trees available.  
 Land, mountainous.  
 Soil, 4th rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.

## Survey of subdivisions, T. 8 S., R. 30 E.

Chains	
	S. 89°52'E., on a random line, bet. secs. 2 and 11.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.06	Fall 2 lks. S. of the cor. of secs. 1, 2, 11 and 12.
	Thence, N. 89°53'W., on true line bet. secs. 2 and 11.
	Over NE. slope, through scattering brush, asc. slightly.
0.60	Spur, slopes N., desc. 64 ft.
8.40	Draw, course N., asc. 53 ft. over NE. slope.
9.50	Wire fence, brs. N. 80°W. and S. 80°E.
16.20	Thence, over NW. slope, desc. 39 ft.
21.70	Draw, course N. 30°E., asc. 365 ft. over NE. slope.
36.60	U.S. Highway, No. 180, brs. N. 60°W. and S. 60°E.
40.03	Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, around post, for $\frac{1}{4}$ sec. cor. of secs. 2 and 11, with brass cap marked
	$\frac{1}{4}$ $\frac{S}{S}$ $\frac{2}{11}$ 1931
47.40	Drain, course N. 60°E.
65.40	Spur, slopes N., desc. 157 ft. over W. slope.
67.30	A large water tank, brs. S. 60 lks. dist.
70.02	Intersect NE. side line of Summit Mining Claim, 7.04 chs. dist., N. 60°00'W., from cor. No. 1 of this claim, which is a pine post, 4 x 4 x 48 ins., set in a conical base of concrete, marked on side, Sl- F4-3076A.
	From cor. No. 1 of this claim, U.S. Location Monument, No. 3076, brs. S. 30°30'E., 8.71 chs. dist., which is a pine post, 6 x 6 x 72 ins. above ground, set in conical base, of concrete, and marked on SE. face, USLM No 3076.
80.06	The cor. of secs. 2, 3, 10 and 11.
	Land, rolling, Soil, 3rd rate. Undergrowth, mesquite, cactus and sage.
	-----
	N. 0°05'W., on a random line, bet. secs. 2 and 3.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
82.15	Fall 16 lks. W. of the cor. of secs. 2, 3, 34 and 35, hereinbefore described.
	Thence, S. 0°02'W., on true line bet. secs. 2 and 3.
	Over SE. slope, through scattering brush.
0.50	Wash, course N. 45°E., asc. over gradual N. slope, 149 ft.
24.40	Dim road, brs. N. 30°E. and S. 30°W.
32.20	Low spur, slopes N. 50°E., desc. 40 ft.
39.60	Wash, course N. 50°E.
42.00	Same wash, course N. 10°W.
42.15	True point for $\frac{1}{4}$ sec. cor. falls in same wash.
42.45	Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 5 ft. base, 2 ft. high, around post, for Witness $\frac{1}{4}$ sec. cor. of secs. 2 and 3, with brass cap marked
	WC $\frac{1}{4}$ S3   S2. 1931
44.00	Same wash, course N. 10°E., asc. 282 ft. over N. slope.
47.00	U.S. Highway No. 180, brs. N. 50°W. and S. 50°E.
52.60	Telephone line, brs. N. 85°W. and S. 85°E. over N. slope

No bearing trees available.

Survey of subdivisions, T.8 S., R. 30 E.

Chains


72.50  
76.34

Flat spur, slopes N.70°W., desc. 61 ft. over SW. slope  
Intersect NE. side line of Summit Mining Claim, S.60°00'  
E., 3.95 chs. dist., from cor. No. 4 of same claim, which  
is a pine post, 4 x 4 x 48 ins. above ground, set in  
conical base of concrete, marked on SE. face, S4-3076A,  
on NW. face, H1.


80.80  
82.15

An old stamp mill, brs. E., 25 lks. dist.  
The cor. of secs. 2, 3, 10 and 11.

Land, rolling hills.  
Soil, 3rd rate.  
Undergrowth, mesquite, greasewood and cactus.  
Timber, scattering cedar.




From the cor. of secs. 3, 4, 33 and 34, on S. bdy. of  
township, established in 1920, which is an iron post,  
2 ins. in diam., 24 ins. above ground, supported by a  
mound of stone, 4 ft. base, 2 ft. high, with brass cap  
marked




0.80  
13.00  
29.60  
40.00

N.0°08'E., on true line bet. secs. 33 and 34.  
Over NW. slope, through scattering brush, desc. slightly.  
Draw, course S.30°W., asc. 209 ft. over S. slope.  
Spur, slopes S.80°E., desc. 174 ft. over NE. slope.  
Enter small basin, drains S.70°E.  
Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in  
the ground, to bedrock; deposit a stone, marked with a  
cross (x) at base, and raise a mound of stone, 3 ft.  
base, 2 ft. high, around post, for  $\frac{1}{4}$  sec. cor. of secs.  
33 and 34, with brass cap marked




50.00  
64.50  
75.70  
80.00

No bearing trees available.  
Leave basin, asc. 128 ft. over S. slope.  
Spur, slopes S. 80°E., desc. 135 ft. over N. slope.  
Foot of slope, thence over rolling ground.  
Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in  
the ground, for cor. of secs. 27, 28, 33 and 34, with  
brass cap marked



No bearing trees available; raise a mound of stone, 3 ft.  
base,  $1\frac{1}{2}$  ft. high, W. of cor.

Land, rolling.  
Soil, 2nd and 3rd rate.  
Undergrowth, greasewood, mesquite and cactus.



## Survey of subdivisions, T. 8 S., R. 30 E.

## Chains

East, on a random line, bet. secs. 27 and 34.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.04 Fall 9 lks. S. of the cor. of secs. 26, 27, 34 and 35.  
 Thence,  
 S.  $89^{\circ}56'$  W., on true line bet. secs. 27 and 34.  
 Over slightly rolling ground, through scattering desert  
 shrubbery.  
 4.90 Wash, 10 lks. wide, course S.  $30^{\circ}$  E.  
 29.30 Wash, 30 lks. wide, course S.  $20^{\circ}$  E.  
 40.02 Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in  
 the ground; deposit a stone, marked with a cross (x),  
 at base of post, with brass cap marked

$$\frac{1}{4} \begin{array}{r} \text{S } 27 \\ \text{S } 34 \\ \hline 1931 \end{array}$$

No bearing trees or stones for a mound available.  
 40.60 A wire fence, brs. N.  $60^{\circ}$  W. and S.  $60^{\circ}$  E.  
 80.04 The cor. of secs. 27, 28, 33 and 34.

Land, slightly rolling.  
 Soil, 2nd rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.

N.  $0^{\circ}08'$  E., on true line bet. secs. 27 and 28.  
 Over gradual SW. slope, through scattering desert shrub-  
 bery, asc. 82 ft.  
 24.80 Fence, brs. N.  $60^{\circ}$  W. and S.  $60^{\circ}$  E.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in  
 the ground to bedrock; deposit a stone, marked with a  
 cross (x) at base, and raise a mound of stone, 3 ft.  
 base,  $1\frac{1}{2}$  ft. high, around post, for  $\frac{1}{4}$  sec. cor. of secs.  
 27 and 28, with brass cap marked

$$\frac{1}{4} \begin{array}{r} \text{S } 28 | \text{S } 27 \\ \hline 1931 \end{array}$$

No bearing trees available.  
 71.70 Small drain, course S.  $40^{\circ}$  W.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in  
 the ground to bedrock; deposit a stone, marked with a  
 cross (x) at base, and raise a mound of stone, 3 ft.  
 base,  $1\frac{1}{2}$  ft. high, around post, for cor. of secs. 21,  
 22, 27 and 28, with brass cap marked

$$\begin{array}{r} \text{T } 8 \text{ S } \text{ R } 30 \text{ E} \\ \text{S } 21 | \text{S } 22 \\ \text{S } 28 | \text{S } 27 \\ \hline 1931 \end{array}$$

No bearing trees available.

Land, slightly rolling.  
 Soil, 2nd rate.  
 Undergrowth, greasewood, cactus and sage.

N.  $89^{\circ}56'$  E., on a random line, bet. secs. 22 and 27.

Survey of subdivisions, T. 8 S., R. 30 E.

Chains

40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.12 Fall 5 lks. N. of the cor. of secs. 22, 23, 26 and 27.  
 Thence,  
 S.  $89^{\circ}58'$  W., on true line bet. secs. 22 and 27.  
 Over E. slope; through desert shrubbery, asc. 86 ft.  
 8.50 Spur, slopes S.  $10^{\circ}$  E., desc. 141 ft. over SW. slope.  
 33.10 Draw, course S.  $10^{\circ}$  W., thence over rolling ground.  
 40.06 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in  
 the ground to bedrock; deposit a stone, marked with a  
 cross (x) at base, and raise a mound of stone, 3 ft.  
 base,  $1\frac{1}{2}$  ft. high, around post, for  $\frac{1}{4}$  sec. cor. of secs.  
 22 and 27, with brass cap marked

$\frac{1}{4}$  S 22  
 S 27  
 1931

No bearing trees available.  
 51.10 Wash, 40 lks. wide, course S.  $30^{\circ}$  E.  
 80.12 The cor. of secs. 21, 22, 27 and 28.

Land, rolling.  
 Soil, 2nd and 3rd rate.  
 Undergrowth, greasewood, mesquite, cactus and sage.

N.  $0^{\circ}08'$  E., on true line bet. secs. 21 and 22.  
 Over S. slope, through desert shrubbery, asc. 282 ft.  
 34.10 Low ridge, brs. N  $70^{\circ}$  W. and S.  $70^{\circ}$  E., desc. 154 ft. over NE.  
 slope.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., over a cross  
 (x) chiseled on surface of rock ledge; raise a mound of  
 stone, 6 ft. base, 3 ft. high, around post, for  $\frac{1}{4}$  sec.  
 cor. of secs. 21 and 22, with brass cap marked

$\frac{1}{4}$   
 S21 | S22  
 1931

No bearing trees available;  
 44.20 Head of draw, course S.  $80^{\circ}$  E., asc. 464 ft.  
 62.00 Spur, slopes S.  $20^{\circ}$  W.  
 74.00 Ridge, brs. N.  $10^{\circ}$  W. and S.  $10^{\circ}$  E.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in  
 the ground to bedrock; deposit a stone, marked with a  
 cross (x) at base, and raise a mound of stone, 4 ft.  
 base, 2 ft. high, around post, for cor. of secs. 15, 16,  
 21 and 22, with brass cap marked

T8S R30E  
S16 | S15  
 S21 | S22  
 1931

No bearing trees available.

Land, hilly.  
 Soil, 4th rate.  
 Undergrowth, greasewood, cactus and sage.

Survey of subdivisions, T. 8 S., R. 30 E.

Chains

40.00 N. 89°58'E., on a random line, bet. secs. 15 and 22.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.12 Fall 12 lks. N. of the cor. of secs. 14, 15, 22 and 23.  
 Thence,  
 N. 89°57'W., on true line bet. secs. 15 and 22.  
 Over rolling ground, through scattering desert shrubbery,  
 desc. 30 ft.  
 11.70 Wash, 20 lks. wide, course S. 10°E.  
 32.40 Wash, 30 lks. wide, course S. 20°W., asc. 102 ft. over SE.  
 slope.  
 40.06 Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in  
 the ground to bedrock; deposit a stone, marked with a  
 cross (x) at base, and raise a mound of stone, 6 ft.  
 base, 2 ft. high, around post, for  $\frac{1}{4}$  sec. cor. of secs.  
 15 and 22, with brass cap marked

$\frac{1}{4}$  S 15  
 S 22  
 1931

No bearing trees available.  
 45.10 Top of small hill, desc. 118 ft. over SW. slope.  
 54.50 Draw, course S., asc. 422 ft. over broken SE. slope.  
 80.12 The cor. of secs. 15, 16, 21 and 22.

Land, rolling and rough mountainous.  
 Soil, 2nd to 4th rate.  
 Undergrowth, greasewood, mesquite and cactus.

-----

N. 0°08'E., on true line bet. secs. 15 and 16.  
 Over rocky NE. slope, through scattering cedar and brush,  
 desc. 107 ft.  
 5.20 Head of draw, course E. asc. 70 ft.  
 14.00 Spur, slopes S. 80°E., desc. 236 ft.  
 23.40 Draw, course N. 80°E., asc. 50 ft.  
 30.30 Point of spur, slopes E., desc. 60 ft.  
 31.80 Draw, course S. 60°E., asc. 80 ft.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 3 ins. in  
 the ground to bedrock; deposit a stone, marked with a  
 cross (x) at base, and raise a mound of stone, 6 ft.  
 base, 2  $\frac{1}{2}$  ft. high, around post, for  $\frac{1}{4}$  sec. cor. of secs.  
 15 and 16, with brass cap marked

$\frac{1}{4}$   
 S16 | S15  
 1931

No bearing trees available.  
 41.70 Spur, slopes S. 80°E., desc. 24 ft.  
 44.60 Draw, course S. 80°E., asc. 600 ft. over steep S. slope  
 68.10 Top of high ridge, brs. N. 40°E. and N. 80°W., desc. 304  
 ft. over N. slope.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., over a  
 cross (x) chiseled on surface of rock ledge; raise a  
 mound of stone, 6 ft. base, 3 ft. high, around post,  
 for cor. of secs. 9, 10, 15 and 16, with brass cap  
 marked

T8S R30E  
 S9 | S10  
 S16 | S15  
 1931

No bearing trees available.



Survey of subdivisions, T. 8 S., R. 30 E.

Chains

Land, rough mountainous.  
Soil, 4th rate.  
Undergrowth, greasewood, mesquite and cactus.

-----

S.89°57'E., on a random line, bet. secs. 10 and 15.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.10 Fall 14 lks. N. of the cor. of secs. 10, 11, 14 and 15.  
 Thence,  
 N.89°51'W., on true line bet. secs. 10 and 15.  
 Over NE. slope, through scattering cedar and brush, asc.  
 151 ft.  
 8.70 Spur, slopes S.20°E., desc. 68 ft.  
 12.90 Draw, course S., asc. 117 ft.  
 29.10 Spur, slopes S., desc. 96 ft.  
 36.50 Draw, course S.40°E., asc. 589 ft. over E. slope.  
 40.05 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in  
 the ground to bedrock; deposit a stone, marked with a  
 cross (x) at base, and raise a mound of stone, 3 ft.  
 base,  $1\frac{1}{2}$  ft. high, around post, for  $\frac{1}{4}$  sec. cor. of secs.  
 10 and 15, with brass cap marked

$\frac{1}{4}$  S 10  
 S 15  
 1931

No bearing trees available.  
 46.60 Thence over SE. slope.  
 65.70 High ridge, brs. N.40°E. and S.40°W., desc. 280 ft. over  
 W. slope.  
 75.10 Draw, course N.30°W., thence along N. slope.  
 80.10 The cor. of secs. 9, 10, 15 and 16.

Land, rough mountainous.  
Soil, 4th rate.  
Undergrowth, mesquite, oak and cactus.  
Timber, scattering cedar.

-----

N.0°08'E., on true line bet. secs. 9 and 10.  
 Over N. slope, through scattering cedar and brush, desc.  
 84 ft.  
 2.90 Draw, course S.70°W., asc. 51 ft.  
 10.30 Point of spur, slopes N.60°W., desc. 177 ft.  
 25.40 Draw, course W., asc. 125 ft.  
 33.20 Spur, slopes W., desc. 112 ft.  
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in  
 the ground to bedrock; deposit a stone, marked with a  
 cross (x) at base, and raise a mound of stone, 3 ft.  
 base,  $1\frac{1}{2}$  ft. high, around post, for  $\frac{1}{4}$  sec. cor. of secs.  
 9 and 10, with brass cap marked

$\frac{1}{4}$   
 S9 | S10  
 1931

From which

A cedar tree, 8 ins. in diam., brs. S.15°00'E., 274 lks.

Survey of subdivisions, T. 8 S., R. 30 E.

Chains


dist., marked  $\frac{1}{4}$  S10 BT.  
 A cedar tree, 6 ins. in diam., brs. S. 3° 30' W., 182 lks.  
 dist., marked  $\frac{1}{4}$  S9 BT.  
 42.80 Point of spur, slopes W., desc. 42 ft.  
 48.20 Draw, course W., asc. 125 ft.  
 54.90 Spur, slopes W., desc. 107 ft.  
 61.20 Draw, course N. 60° W., asc. 49 ft.  
 67.00 Spur, slopes N. 70° W., desc. 60 ft. over N. slope.  
 70.40 Draw, course N. 70° W., asc. 43 ft. over SW. slope.  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in  
 the ground to bedrock; deposit a stone, marked with a  
 cross (x) at base, and raise a mound of stone, 4 ft.  
 base, 2 ft. high, around post, for cor. of secs. 3, 4,  
 9 and 10, with brass cap marked

T8S, R30E  
 S4 | S3  
 ---  
 S9 | S10  
 1931

No bearing trees available.

Land, rough mountainous.  
 Soil, 4th rate.  
 Undergrowth, mesquite and cactus.  
 Timber, scattering cedar.

40.00 S. 89° 51' E., on a random line, bet. secs. 3 and 10.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.10 Intersect the cor. of secs. 2, 3, 10 and 11.  
 Thence,  
 N. 89° 51' W., on true line, bet. secs. 3 and 10.  
 Over open W. slope, desc. 50 ft.  
 3.10 Draw, course N. 70° W., asc. over NE. slope, through scat-  
 tering brush, 144 ft.  
 8.15 Intersect SW. side line of Summit Mining Claim, S. 60° 00'  
 E., .6 lks. dist., from cor. No 3, of same claim, here-  
 inbefore described.  
 24.60 Spur, slopes N., desc. 17 ft.  
 33.30 Draw, course N. asc. 90 ft. over NE. slope.  
 35.53 At 40.82 chs. S. from this point is a Graham-Greenlee County Bdy. mon. pt.,  
 which is a stone in place, 5 ft. long, 3 ft. wide, and  
 $1\frac{1}{2}$  ft. above ground, marked on flat surface of top as  
 follows:

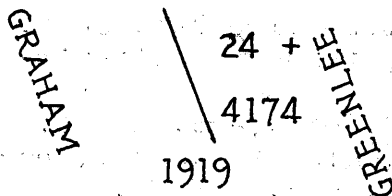

40.05 Set an iron post, 3 ft. long, 1 in. in diam., 4 ins. in  
 the ground to bedrock; deposit a stone, marked with a  
 cross (x) at base, and raise a mound of stone, 5 ft.  
 base, 2 ft. high, around post, for  $\frac{1}{4}$  sec. cor. of secs.  
 3 and 10, with brass cap marked

$\frac{1}{4}$  S 3  
 ---  
 S 10  
 1931

No bearing trees available.


Survey of subdivisions, T. 8 S., R. 30 E.

Chains  
 40.30 Spur, slopes N., desc. 54 ft.  
 54.90 Head of draw, course N., asc. 183 ft. over NE. slope.  
 74.80 Thence along N. slope.  
 80.10 The cor. of secs. 3, 4, 9 and 10.

Land, rolling mountainous.  
 Soil 4th rate.  
 Undergrowth, mesquite, cactus and sage.  
 Timber, scattering cedar.

-----

N.0°02'E., on a random line, bet. secs. 3 and 4.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 81.94 Fall 7 lks. W. of the cor. of secs. 3, 4, 33 and 34, here-  
 inbefore described.  
 Thence,  
 S.0°05'W., on true line bet. secs. 3 and 4.  
 Over S. slope, through scattering brush, desc. 15 ft.  
 2.20 Wash, 30 lks. wide, course E., asc. over general N. slope,  
 259 ft.  
 5.80 A county line monument, bet. Graham and Greenlee Counties,  
 which is a malpais stone, 6, x 8 x 14 ins., set in a mound  
 of stone, marked on W. face, GRA and on E. face, GREE,  
 brs. W., 30.29 chs. dist.  
 12.10 U.S. Highway, No. 180, brs. N.80°W. and S.80°E.  
 24.20 Small draw, course N.20°E.  
 30.40 Telephone line, brs. N.70°W. and S.70°E.  
 41.94 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in  
 the ground to bedrock; raise a mound of stone, 5 ft.  
 base, 2 ft. high, around post, for  $\frac{1}{4}$  sec. cor. of secs.  
 3 and 4, with brass cap marked




1931 From which

A cedar tree, 10 ins. in diam., brs. N.85°30'E., 42 lks.  
 dist., marked  $\frac{1}{4}$  S3 BT.  
 A cedar tree, 6 ins. in diam., brs. N.53°45'W., 207 lks.  
 dist., marked  $\frac{1}{4}$  S4 BT.  
 66.90 Point of spur, slopes E., desc. 87 ft. over SE. slope.  
 72.70 Draw, course N.40°E., asc. 275 ft. over N. slope.  
 81.94 The cor. of secs. 3, 4, 9 and 10.  
 Land, rolling mountainous.  
 Soil, 4th rate.  
 Undergrowth, mesquite, cactus and sage.  
 Timber, scattering cedar.

-----

From the cor. of secs. 4, 5, 32 and 33, on S. bdy. of  
 township, established in 1920, which is an iron post,  
 2 ins. in diam., 24 ins. above ground, set in a mound of  
 stone, 4 ft. base, 2 ft. high, with brass cap marked



N.0°08'E., on true line bet. secs. 32 and 33.


Survey of subdivisions, T. 8 S., R. 30 E.

Chains

Over rocky SW. slope, through scattering brush, asc. 374 ft.

19.50 High, ridge, brs. N.80°W. and S.80°E., desc. 443 ft. over N. slope.

40.00 Set an iron post, 3 ft. base, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1½ ft. high, around post, for ¼ sec. cor. of secs. 32 and 33, with brass cap marked




No bearing trees available.

Thence, over NE. slope.

44.60 Draw, course N.60°E., asc. 34 ft.

55.50 Point of spur, slopes N.60°E., desc. 205 ft. over N. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1½ ft. high, around post, for cor. of secs. 28, 29, 32 and 33, with brass cap marked




No bearing trees available.

Land, rough mountainous.

Soil, rocky, 4th rate.

Undergrowth, greasewood, mesquite, cactus and sage.



East, on a random line, bet. secs. 28 and 33.

40.00 Set temp. ¼ sec. cor.

79.90 Fall 14 lks. N. of the cor. of secs. 27, 28, 33 and 34.

Thence,


N.89°54'W., on true line bet. secs. 28 and 33.

Over Slightly rolling ground, through scattering desert shrubbery.

27.50 Foot of NE. slope, asc. 86 ft.

36.90 Spur, slopes N., desc. 96 ft.

39.95 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for ¼ sec. cor. of secs. 28 and 33, with brass cap marked



No bearing trees available; raise a mound of stone, 3 ft. base, 1½ ft. high, to N. of cor.

54.50 Wash, 10 lks. wide, course N., asc. 75 ft.

67.50 Small spur, slopes N.20°E., desc. 175 ft. over NW. slope.

79.20 Small drain, course N., asc. slightly.

79.90 The cor. of secs. 28, 29, 32 and 33.


Survey of subdivisions, T. 8 S., R. 30 E.

Chains

Land, rough mountainous.  
Soil, 2nd to 4th rate.  
Undergrowth, greasewood, cactus and sage.  
No timber.


15.00  
30.00  
40.00

N.0°08'E., on true line bet. secs. 28 and 29.  
Over gradual N. slope, through desert shrubbery, desc.  
45 ft.  
Enter small basin.  
Foot of slope, asc. over gradual S. slope, 109 ft.  
Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor. of secs. 28 and 29, with  
brass cap marked



74.20  
80.00

No bearing trees available; raise a mound of stone, 3 ft.  
base,  $1\frac{1}{2}$  ft. high, W. of cor.  
Wire fence, brs. N.60°W. and S.60°E.  
Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in  
the ground, for cor. of secs. 20, 21, 28 and 29, with  
brass cap marked




No bearing trees available; raise a mound of stone, 3 ft.  
base,  $1\frac{1}{2}$  ft. high, W. of cor.

Land, rolling.  
Soil, 2nd rate.  
Undergrowth, greasewood and cactus.  
No timber.

40.00  
79.86

S.89°54'E., on a random line, bet. secs. 21 and 28.  
Set temp.  $\frac{1}{4}$  sec. cor.  
Fall 2 lks. S. of the cor. of secs. 21, 22, 27 and 28.  
Thence,  
N.89°55'W. on true line bet. secs. 21 and 28.  
Over slightly rolling ground, through low desert shrub-  
bery,  
Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor. of secs. 21 and 28, with  
brass cap marked



53.10  
79.86

No bearing trees available; raise a mound of stone, 3 ft.  
base,  $1\frac{1}{2}$  ft. high, N. of cor.  
Wash, 30 lks. wide, course S.  
The cor. of secs. 20, 21, 28 and 29.

Survey of subdivisions, T. 8 S., R. 30 E.

Chains	<p>Land, slightly rolling. Soil, 2nd rate. Undergrowth, greasewood and cactus. No timber.</p> <p>-----</p> <p>N.0°08'E., on true line bet. secs. 20 and 21. Over gradual S. slope, through low desert shrubbery, asc. 67 ft.</p> <p>40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1½ ft. high, around post, for ¼ sec. cor. of secs. 20 and 21, with brass cap marked</p> <p style="text-align: center;"> <math>\frac{1}{4}</math>              S20   S21              1931         </p> <p>No bearing trees available. This cor. is situated on low spur, sloping W. Desc. 42 ft.</p> <p>58.40 Wash, 20 lks. wide, course S.40°W., asc. 59 ft. over S. slope.</p> <p>74.00 Thence along W. slope.</p> <p>80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1½ ft. high, around post, for cor. of secs. 16, 17, 20 and 21, with brass cap marked</p> <p style="text-align: center;">             T8S R30E              S17   S16              S20   S21              1931         </p> <p>No bearing trees available;</p> <p>Land, rolling. Soil, 3rd rate. Undergrowth, greasewood, cactus and mesquite. No timber.</p> <p>-----</p> <p>S.89°55'E., on a random line, bet. secs. 16 and 21. Set temp. ¼ sec. cor.</p> <p>40.00 Fall 14 lks. S. of the cor. of secs. 15, 16, 21 and 22. 79.80 Thence, S.89°59'W., on true line bet. secs. 16 and 21. Over E. slope, through scattering desert shrubbery, asc. 49 ft.</p> <p>1.60 Ridge, brs. N.10°W. and S.10°E., desc. 556 ft. over SW. slope.</p> <p>37.80 Draw, course S.30°W., asc. 59 ft.</p> <p>39.90 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 5 ft. base, 2½ ft. high, around post, for ¼ sec. cor. of secs. 16 and 21, with brass cap marked</p>
--------	---


Survey of subdivisions, T. 8 S., R. 30 E.

Chains

$\frac{1}{4}$  S 16  
S 21  
1931

No bearing trees available.  
40.50 Point of spur, slopes S., desc. 56 ft. over SW. slope.  
46.20 Head of draw, course S.10°W., asc. 244 ft. over E. slope.  
58.70 Thence along N. slope.  
63.80 Desc. 300 ft. over W. slope.  
79.80 The cor. of secs. 16, 17, 20 and 21.

Land, rough mountainous.  
Soil, rocky, 4th rate.  
Undergrowth, mesquite, cactus and greasewood.




N.0°08'E., on true line bet. secs. 16 and 17.  
Over open NW. slope, desc. slightly.  
1.50 Draw, course S.60°W., asc. 74 ft. over S. slope.  
11.80 Low spur, slopes S.45°W., desc. 46 ft.  
19.10 Draw, course S.70°W., asc. 389 ft. over SW. slope.  
35.20 Small draw, course S.45°E.  
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1½ ft. high, around post, for ¼ sec. cor. of secs. 16 and 17, with brass cap marked

$\frac{1}{4}$   
S17 | S16  
1931

No bearing trees available.  
47.80 Spur, slopes S.60°W., desc. 62 ft.  
56.80 Head of draw, course S.70°W., asc. 678 ft. over steep SW. slope.  
78.00 High rocky ridge, brs. N.80°W., and S.80°E., desc. 63 ft. over N. slope.  
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1½ ft. high, around post, for cor. of secs. 8, 9, 16, and 17, with brass cap marked

T8S R30E  
S8 | S9  
S17 | S16  
1931

No bearing trees available.  
Land, rough mountainous.  
Soil, rocky; 4th rate.  
Undergrowth, greasewood, mesquite and cactus.



N.89°59'E., on a random line, bet. secs. 9 and 16.

Survey of subdivisions, T. 8 S., R. 30 E.

Chains

40.00  
79.86

Set temp.  $\frac{1}{4}$  sec. cor.  
Fall 5 lks. S. of the cor. of secs. 9, 10, 15 and 16.  
Thence,  
S.  $89^{\circ}57'W.$ , on true line bet. secs. 9 and 16.  
Along N. slope, through scattering cedar and brush.  
Head of draw, course N., asc. 156 ft. over NE. slope.  
Spur, slopes N., desc. 369 ft. over NW. slope.  
Head of draw, course N.  $30^{\circ}W.$   
Draw, course N.  $10^{\circ}W.$ , asc. 451 ft. over NE. slope.  
Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 9 and 16, with brass cap marked

$\frac{1}{4}$   $\frac{S. 9}{S. 16}$   
1931

From which

A cedar tree, 5 ins. in diam., brs. S.  $45^{\circ}30'E.$ , 228 lks. dist., marked  $\frac{1}{4}$  S16 BT.  
No other trees available; raise a mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.  
The cor. of secs. 8, 9, 16 and 17.

79.86

Land, rough mountainous.  
Soil, rocky, 4th rate.  
Undergrowth, oak, cactus and bear grass.  
Timber, cedar.

N.  $0^{\circ}08'E.$ , on true line, bet. secs. 8 and 9.  
Over N. slope, through scattering timber and brush, desc. 580 ft.  
Wash, 20 lks. wide, course N.  $70^{\circ}W.$   
Wash, 10 lks. wide, course W., asc. 82 ft. over SW. slope.  
Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 8 and 9, with brass cap marked

33.20  
37.20  
40.00

$\frac{1}{4}$   
S8 | S9  
1931

No bearing trees available; raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
Spur, slopes W., desc. 105 ft. over NW. slope.  
Wash, 100 lks. wide, course S.  $80^{\circ}W.$ , asc. 175 ft. over S. slope.  
Ridge, brs. N.  $80^{\circ}E.$  and S.  $80^{\circ}W.$ , desc. 10 ft. over NW. slope.  
Set an iron post, 3 ft. long, 2 ins. in diam., 3 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 6 ft. base,  $2\frac{1}{2}$  ft. high, around post, for cor. of secs. 4, 5, 8 and 9, with brass cap marked

46.80  
55.20  
77.70  
80.00

T8S R30E  
S5 | S4  
S8 | S9  
1931

No bearing trees available.

Land, rough mountainous.  
Soil, rocky, 4th rate.  
Undergrowth, mesquite, cactus and sage.



Survey of subdivisions, T. 8 S., R. 30 E.

Chains	<p>N.89°57'E., on a random line, bet. secs. 4 and 9. Set temp. <math>\frac{1}{4}</math> sec. cor. Fall 2 lks. S. of the cor. of secs. 3, 4, 9 and 10. Thence, S.89°56'W., on true line bet. secs. 4 and 9. Over W. slope, through scattering timber and brush, desc. 124 ft. 10.90 Wash, 20 lks. wide, course N.60°W. 16.20 Wash, 40 lks. wide, course N.40°W. 25.00 Thence over NW. slope. 33.50 Same wash, 50 ft. wide, course S.45°W., asc. 282 ft. over SE. slope. 39.93 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. below surface, in rock crevice; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, <math>1\frac{1}{2}</math> ft. high, around post, for <math>\frac{1}{4}</math> sec. cor. of secs. 4 and 9, with brass cap marked</p>
	$\frac{1}{4} \frac{S 4}{S 9}$ <p>1931</p>
	<p>No bearing trees available. 59.26 High ridge, brs. N.30°E. and W., thence, follow along top of ridge. 67.70 Leave ridge, slopes to SW., desc. 218 ft. over NW. slope. 79.86 The cor. of secs. 4, 5, 8 and 9.  Land, rough mountainous. Soil, rocky, 4th rate. Undergrowth, mesquite cactus and sage. Timber, cedar.</p>
	<p>N.0°05'E., on a random line, bet. secs. 4 and 5. 40.00 Set temp. <math>\frac{1}{4}</math> sec. cor. 81.88 Fall 24 lks. E. of the cor. of secs. 4, 5, 32 and 33, hereinbefore described. Thence, S.0°05'E., on true line bet. secs. 4 and 5. Over NW. slope, through scattering timber and brush, asc. 543 ft. 7.30 Telephone line, brs. N.85°W. and S.85°E. 33.80 Head of draw, course W. 41.88 Set an iron post, 3 ft. long, 1 in. in diam., over a cross (x) on surface of rock ledge; raise a mound of stone, 6 ft. base, 3 ft. high, around post, for <math>\frac{1}{4}</math> sec. cor. of secs. 4 and 5, with brass cap marked</p>
	$\frac{1}{4} \frac{S 5}{S 4}$ <p>1931</p>
	<p>No bearing trees available. This cor. is situated at foot of cliff, 50 ft. high, facing N. 42.90 Top of high rocky ridge, brs. E. and W., desc. 425 ft. over steep rocky S. slope. 72.70 Draw, course S.30°W., asc. 102 ft. over NW. slope. 81.88 The cor. of secs. 4, 5, 8 and 9.  Land, rough mountainous.</p>

Survey of subdivisions, T. 8 S., R. 30 E.

Chains

Soil, rocky, 4th rate.  
Undergrowth, mesquite, cactus and sage.  
Timber, cedar.

-----  
From the cor. of secs. 5, 6, 31 and 32, on S. bdy. of township, established in 1920, which is an iron post, 2 ins. in diam., 14 ins. above ground, witnessed by a mound of stone, 3 ft. base, 1 1/2 ft. high, to W., and with brass cap marked

T8S R30E  
S31 | S32  
-----  
S6 | S5  
T9S  
1920

40.00

N.0°07'E., on true line, bet. secs. 31 and 32.  
Over level ground, through low desert shrubbery.  
Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for 1/4 sec. cor. of secs. 31 and 32, with brass cap marked

1/4  
S31 | S32  
-----  
1931

46.00  
80.00

No bearing trees available; raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.  
Leave level land, asc. over rocky SE. slope, 514 ft.  
Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground, for cor. of secs. 29, 30, 31 and 32, with brass cap marked

T8S R30E  
S30 | S29  
-----  
S31 | S32  
-----  
1931

No bearing trees available; raise a mound of stone, 3 ft. 2 ft. high, W. of cor.

Land, level and rough mountainous.  
Soil, 1st to 4th rate.  
Undergrowth, greasewood, cactus and sage.  
No timber.

40.00  
79.86

-----  
East, on a random line, bet. secs. 29 and 32.  
Set temp. 1/4 sec. cor.  
Fall 2 lks. S. of the cor. of secs. 28, 29, 32 and 33.  
Thence,

34.80  
39.93

S.89°59'W., on true line bet. secs. 29 and 32.  
Over NE. slope, through scattering desert shrubbery, asc. 190 ft.  
Sour, slopes N.40°W., desc. 319 ft. over NW. slope.  
Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for 1/4 sec. cor. of secs. 29 and 32, with brass cap marked


Survey of subdivisions, T. 8 S., R. 30 E.

Chains

$\frac{1}{4}$   $\frac{S\ 29}{S\ 32}$   
1931

No bearing trees available; raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.  
51.40 Enter small valley, drains to S.  
63.90 Leave valley, asc. over rocky SE. slope, 444 ft.  
79.86 The cor. of secs. 29, 30, 31 and 32.

Land, rough mountainous and rolling.  
Soil, 2nd to 4th rate.  
Undergrowth, greasewood, mesquite, cactus and sage.




40.00 West, on a random line, bet. secs. 30 and 31.  
78.12 Set temp.  $\frac{1}{4}$  sec. cor.  
Fall 7 lks. N. of the cor. of secs. 25, 30, 31 and 36, hereinbefore described.

Thence,  
N. 89° 57' E., on true line bet. secs. 30 and 31.  
Over gradual SW. slope, through scattering brush, asc. 73 ft.  
13.00 Low ridge, brs. N. 20° W. and S. 20° E., desc. 56 ft.  
22.00 Cross swale, drains S. 10° E., asc. 68 ft. over SW. slope.  
30.20 Point of rocky spur, slopes S. 20° W., desc. 39 ft.  
35.10 Draw, course S. 30° W., asc. 402 ft. over SW. slope.  
38.12 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground, to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1 1/2 ft. high, around post, for  $\frac{1}{4}$  sec. cor. of secs. 30 and 31, with brass cap marked

$\frac{1}{4}$   $\frac{S\ 30}{S\ 31}$   
1931

74.50 Rocky ridge, brs. N. 10° E. and S. 10° W., desc. 100 ft. over SE. slope.  
78.12 The cor. of secs. 29, 30, 31 and 32.

Land, rough and rolling mountainous.  
Soil, 4th rate.  
Undergrowth, greasewood, cactus and sage.



N. 0° 07' E., on true line bet. secs. 29 and 30.  
Over rocky SE. slope, through scattering brush, asc. 169 ft.  
11.70 Rocky ridge, brs. N. 10° E. and S. 10° W., desc. 110 ft. over NW. slope.  
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 29 and 30, with brass cap marked

$\frac{1}{4}$   
S30 | S29  
1931

Survey of subdivisions, T. 8 S., R. 30 E.

Chains

No bearing trees available; raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
 Thence over NE. slope, desc. 300 ft.  
 61.00 Set an iron post, 3 ft. long, 2 ins. in diam., 6 ins. in  
 80.00 the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 6 ft. base, 2½ ft. high, around post, for cor. of secs. 19, 20, 29 and 30, with brass cap marked

T8S	R30E
S19	S20
S30	S29
1931	

No bearing trees available.

Land, rolling mountainous.  
 Soil, 4th rate.  
 Undergrowth, mesquite, greasewood, cactus and sage.

40.00 N. 89° 59' E., on a random line, bet. secs. 20 and 29.  
 79.76 Set temp. ¼ sec. cor.  
 Intersect the cor. of secs. 20, 21, 28 and 29.  
 Thence,  
 S. 89° 59' W., on true line bet. secs. 20 and 29.  
 Desc. 50 ft. over gradual SW. slope, thru scattering undergrowth and  
 9.26 Fence, brs. NW. and SE.  
 31.90 Wash, course S., asc. 109 ft., over E. slope.  
 39.88 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1½ ft. high, around post, for ¼ sec. cor. of secs. 20 and 29, with brass cap marked

¼	S 20
	S 29
1931	

64.40 No bearing trees available.  
 This cor. falls on spur, sloping S. 20° E.,  
 Desc. 132 ft.  
 Bottom of swale, drains S. 30° E., asc. 157 ft. over NE.  
 79:76 slope.  
 The cor. of secs. 19, 20, 29 and 30.

Land, rolling.  
 Soil, 2nd to 4th rate.  
 Undergrowth, greasewood, mesquite and cactus.  
 No timber.

40.00 S. 89° 57' W., on a random line, bet. secs. 19 and 30.  
 78.46 Set temp. ¼ sec. cor.  
 Fall 2 lks. S. of the cor. of secs. 19, 24, 25 and 30, hereinbefore described.  
 Thence,

Survey of subdivisions, T. 8 S., R. 30 E.

Chains	
0.90	N.89°58'E., on true line bet. secs. 19 and 30.
12.00	Over SE. slope, through scattering brush, desc. slightly. Wash, 15 lks. wide, course S.10°E.
38.46	Wash, 15 lks. wide, course S.30°W., asc. 375 ft. over W. slope.
	Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1½ ft. high, around post, for ¼ sec. cor. of secs. 19 and 30, with brass cap marked
	$\frac{1}{4} \begin{array}{c} S 19 \\ S 30 \\ 1931 \end{array}$
57.39	No bearing trees available.
78.46	Low ridge, brs. N.30°W. and S.30°E., desc. 218 ft. over NE. slope.
	The cor. of secs. 19, 20, 29 and 30.
	Land, rolling. Soil, 3rd and 4th rate. Undergrowth, greasewood, mesquite and cactus. No timber.
-----	
14.80	N.0°07'E., on true line bet. secs. 19 and 20.
27.60	Over rocky NE. slope, through scattering brush, desc. 138 ft.
40.00	Bottom of swale, drains S.30°E., asc. over gradual SW. slope, 116 ft.
	Fence, brs. E. and W.
	Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1½ ft. high, around post, for ¼ sec. cor. of secs. 19 and 20, with brass cap marked
	$\frac{1}{4} \begin{array}{c} S 19   S 20 \\ 1931 \end{array}$
70.00	No bearing trees available.
80.00	Wash, 10 lks. wide, course S.20°W.
	Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 17; 18, 19 and 20, with brass cap marked
	$\begin{array}{c} T8S   R30E \\ S18   S17 \\ S19   S20 \\ 1931 \end{array}$
	No bearing trees available; raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
	Land, rolling. Soil, 3rd and 4th rate. Undergrowth, greasewood and cactus.

## Survey of subdivisions, T. 8 S., R. 30 E.

Chains

40.00 N.  $89^{\circ}59'E.$ , on a random line, bet. secs. 17 and 20.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.92 Fall 12 lks. N. of the cor. of secs. 16, 17, 20 and 21.  
 Thence,  
 N.  $89^{\circ}56'W.$ , on true line bet. secs. 17 and 20.  
 Over NW. slope, through scattering brush., desc. slightly.  
 2.50 Draw, course S.  $40^{\circ}W.$ , thence over rolling ground.  
 18.00 Wash, 40 lks. wide, course S.  $20^{\circ}W.$   
 39.96 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in  
 the ground, for  $\frac{1}{4}$  sec. cor. of secs. 17 and 20, with  
 brass cap marked

$\frac{1}{4}$   $\frac{S 17}{S 20}$   
 1931

43.90 Wash, 40 lks. wide, course S.  $20^{\circ}E.$   
 60.00 Wash, 30 lks. wide, course S.  
 67.40 Low spur, slopes S.  $10^{\circ}W.$ , desc. 69 ft.  
 75.70 Wash, 10 lks. wide, course S.  $20^{\circ}W.$   
 79.92 The cor. of secs. 17, 18, 19 and 20.

Land, rolling.  
 Soil, 2nd and 3rd rate.  
 Undergrowth, greasewood, cactus, mesquite and sage.

40.00 S.  $89^{\circ}58'W.$ , on a random line, bet. secs. 18 and 19.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 78.64 Intersect the cor. of secs. 13, 18, 19 and 24, hereinbefore described.  
 Thence,  
 N.  $89^{\circ}58'E.$ , on true line bet. secs. 18 and 19.  
 Over gradual S. slope, through low brush.  
 13.00 Wash, 10 lks. wide, course S.  
 36.90 Wash, 20 lks. wide, course S.  $10^{\circ}W.$   
 38.64 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in  
 the ground, for  $\frac{1}{4}$  sec. cor. of secs. 18 and 19, with  
 brass cap marked

$\frac{1}{4}$   $\frac{S 18}{S 19}$   
 1931

No bearing trees available; raise a mound of stone, 3 ft.  
 base, 2 ft. high, N. of cor.

71.00 Wash, 15 lks. wide, course S.  
 78.64 The cor. of secs. 17, 18, 19 and 20.

Land, rolling.  
 Soil, 3rd rate.  
 Undergrowth, greasewood, mesquite cactus and sage.

17.40 N.  $0^{\circ}07'E.$ , on true line bet. secs. 17 and 18.  
 34.60 Over gradual S. slope, through scattering brush, asc.  
 40.00 324 ft.  
 Small draw, course S.  $20^{\circ}W.$   
 Top of hill, desc. 350 ft. over NE. slope.  
 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in

Survey of subdivisions, T. 8 S., R. 30 E.

Chains

the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 3 ft. base, 1 1/2 ft. high, around post, for 1/4 sec. cor. of secs. 17 and 18, with brass cap marked

1/4  
S18 | S17  
1931

47.20  
52.10  
58.30  
68.50  
79.70  
80.00

No bearing trees available.  
Small draw, course E., thence along E. slope.  
Draw, course S.30°E., asc. 248 ft. over general S. slope.  
Same draw, course S.20°W.  
Spur, course W., desc. 220 ft. over N. slope.  
Small draw, course N.50°W.  
Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 4 ft. base, 1 1/2 ft. high, around post, for cor. of secs. 7, 8, 17 and 18, with brass cap marked

T8S R30E  
S7 | S8  
S18 | S17  
1931

No bearing trees available;  
Land, rolling mountainous.  
Soil, 3rd rate.  
Undergrowth, mesquite, greasewood and cactus.  
No timber.

40.00  
79.94  
3.40  
24.70  
27.80  
39.97

S.89°56'E. on a random line, bet. secs. 8 and 17.  
Set temp. 1/4 sec. cor.  
Fall 12 lks. S. of the cor. of secs. 8, 9, 16 and 17.  
Thence,  
S.89°59'W., on true line bet. secs. 8 and 17.  
Over NE. slope, through scattering brush; asc. slightly.  
High, ridge, brs. N.70°W. and S.70°W., desc. 534 ft. over steep W. slope.  
Draw, course S.30°W., asc. 98 ft. over SE. slope.  
Thence over SW. slope, desc. 144 ft.  
Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock; deposit a stone, marked with a cross (x) at base, and raise a mound of stone, 5 ft. base, 2 1/2 ft. high, around post, for 1/4 sec. cor. of secs. 8 and 17, with brass cap marked

1/4 S 8  
S 17  
1931

42.70  
54.90  
67.50  
73.10  
79.94

No bearing trees available.  
Draw, course S.20°E., asc. 125 ft. over SE. slope.  
Ridge, brs. N. and S., desc. 243 ft. over W. slope.  
Draw, course N.30°W., asc. 80 ft.  
Spur, slopes N.20°W., desc. 96 ft. over W. slope.  
The cor. of secs. 7, 8, 17 and 18.

Survey of subdivisions, T. 8 S., R. 30 E.

Chains

Land, rough mountainous.  
Soil, 4th rate.  
Undergrowth, greasewood, mesquite and cactus.

-----

40.00 S. 89°58'W., on a random line bet. secs. 7 and 18.  
Set temp.  $\frac{1}{4}$  sec. cor.  
78.76 Fall 2 lks. N. of the cor. of secs. 7, 12, 13 and 18,  
hereinbefore described.  
Thence,  
N. 89°57'E., on true line bet. secs. 7 and 18.  
Over SW. slope, through scattering brush, asc. 177 ft.  
12.10 Spur, slopes S. 10°W., desc. 143 ft. over SE. slope.  
23.80 Thence along S. slope.  
37.30 Wash, 60 lks. wide, course S. 60°W., asc. 140 ft.  
38.76 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor. of secs. 7 and 18, with  
brass cap marked

$\frac{1}{4}$  S 7  
S 18  
1931

No bearing trees available; raise a mound of stone, 3 ft.  
base, 2 ft. high, N. of cor.  
47.60 Thence along N. slope.  
60.20 Small draw, course N. 40°W., asc. 34 ft., over NW. slope.  
78.20 Small draw, course N. 50°W.  
78.76 The cor. of secs. 7, 8, 17 and 18.

Land, rolling hills.  
Soil, 3rd rate.  
Undergrowth, greasewood, mesquite and cactus.

-----

11.00 N. 0°07'E., on true line bet. secs. 7 and 8.  
Over NW. slope, through scattering timber and brush, desc.  
40 ft.  
40.00 Wash, 100 lks. wide, course S. 80°W., asc. 645 ft. over  
steep SE. slope.  
Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in  
the ground to bedrock; deposit a stone, marked with a  
cross (x) at base, and raise a mound of stone, 5 ft.  
base, 2 ft. high, around post, for  $\frac{1}{4}$  sec. cor. of secs.  
7 and 8, with brass cap marked

$\frac{1}{4}$   
S 7 | S 8  
1931

46.90 No bearing trees available.  
High ridge, brs. N. 40°E. and S. 40°W., desc. 550 ft. over  
steep NE. slope.  
76.60 Draw, course N. 60°W., asc. 55 ft. over SW. slope.  
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 6 ins. in  
the ground to bedrock; deposit a stone, marked with a  
cross (x) at base, and raise a mound of stone, 5 ft.  
base, 2  $\frac{1}{2}$  ft. high, around post, for cor. of secs. 5, 6,



Survey of subdivisions, T. 8 S., R. 30 E.

Chains

7 and 8, with brass cap marked

T8S	R30E
S6	S5
S7	S8
1931	


No bearing trees available.

Land, rough mountainous.

Soil, 4th rate.

Undergrowth, mesquite, oak, cactus and sage.

Timber, scattering cedar.



N.89°59'E., on a random line, bet. secs. 5 and 8.  
 40.00 Set temp. 1/4 sec. cor.  
 79.96 Fall 2 lks. N. of the cor. of secs. 4, 5, 8 and 9.  
 Thence, West, on true line, bet. secs. 5 and 8.  
 Over NW. slope, through scattering brush, desc. 74 ft.  
 8.30 Small drain, course N.30°W., asc. 40 ft.  
 16.70 Low ridge, brs. S.80°E. and S.60°W., desc. 132 ft. over  
 NW. slope.  
 30.10 Draw, course S.60°W., thence along S. slope.  
 38.20 Small draw, course S., asc. 25 ft.  
 39.98 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in  
 the ground, for 1/4 sec. cor. of secs. 5 and 8, with brass  
 cap marked

1/4	S 5
	S 8
1931	


No bearing trees available; raise a mound of stone, 3 ft.  
 base, 2 ft. high, N. of cor.  
 42.40 Low spur, slopes S., desc. 43 ft.  
 48.90 Wash, 30 lks. wide, course S.30°E., asc. 187 ft. over NE.  
 slope.  
 60.80 Ridge, brs. S. and N.30°W., desc. 190 ft. over SW. slope.  
 79.96 The cor. of secs. 5, 6, 7 and 8.

Land, rolling mountainous.

Soil, 4th rate.

Undergrowth, mesquite, cactus and sage.

Timber, cedar.



S.89°57'W., on a random line, bet. secs. 6 and 7.  
 40.00 Set temp. 1/4 sec. cor.  
 79.04 Fall 5 lks. N. of the cor. of secs. 1, 6, 7 and 12, here-  
 inbefore described.  
 Thence,  
 N.89°55'E., on true line bet. secs. 6 and 7.  
 Over general NW. slope, through scattering timber and  
 brush, asc. 195 ft.  
 2.20 Wash, 10 lks. wide, course N.30°W.  
 31.40 Small spur, slopes N.20°W., thence along N. slope.  
 39.04 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in  
 the ground, for 1/4 sec. cor. of secs. 6 and 7, with brass  
 cap marked

Survey of subdivisions, T. 8 S., R. 30 E.

Chains

$\frac{1}{4}$   $\frac{S 6}{S 7}$   
1931

No bearing trees available; raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.  
40.90 Draw, course N.60°W.; asc. 166 ft. over W. slope.  
53.20 Spur, slopes N.50°W., desc. 102 ft., over NE. slope.  
74.60 Draw, course N.50°W., asc. 77 ft. over SW. slope.  
79.04 The cor. of secs. 5, 6, 7 and 8.

Land, rolling mountainous.  
Soil, 4th rate.  
Undergrowth, mesquite cactus and sage.  
Timber, scattering cedar.

40.00 N.0°05'W., on a random line, bet. secs. 5 and 6.  
81.93 Set temp.  $\frac{1}{4}$  sec. cor.  
Fall 14 lks. E. of the cor. of secs. 5, 6, 31 and 32; hereinbefore described.  
Thence,  
S.0°11'E., on true line bet. secs. 5 and 6.  
5.00 Along W. slope, through scattering brush.  
14.90 Telephone line, brs. N.80°E. and S.80°W.  
32.20 Draw, course N. 50°W., asc. 394 ft. over general NW. slope.  
41.93 Small draw, course W.  
Set an iron post, 3 ft. long, 1 in. in diam., over a cross (x) chiseled on surface of rock ledge; raise a mound of stone, 6 ft. base, 3 ft. high, around post, for  $\frac{1}{4}$  sec. cor. of secs. 5 and 6, with brass cap marked

$\frac{1}{4}$   
S6 | S5  
1931

42.90 No bearing trees available.  
Ridge, brs. N.70°E. and S.70°W., desc. 254 ft. over steep S. slope.  
53.50 Head of draw, course S.30°W., thence along W. slope.  
69.90 Thence desc. 117 ft. over SW. slope.  
81.93 The cor. of secs. 5, 6, 7 and 8.

Land, rolling mountainous.  
Soil, 4th rate.  
Undergrowth, mesquite, cactus and sage.

FINAL INSTRUMENT TEST

The continued satisfactory adjustment of the solar attachment is indicated in the initial tests described in Book "C" of this Group, "Field notes of T.7S., R.30E."

Township 8 South, Range 30 East

GENERAL DESCRIPTION

Township 8 South, Range 30 East, lies about 10 miles West of the town of Duncan, Ariz., with "U.S. Highway No. 180" running westerly through the N. part of the township to Solomonville and Phoenix, Ariz.

The south-east part of the township is reached by two branch roads used by stockmen and wood-gatherers. Another secondary road runs to a spring near the  $\frac{1}{4}$  sec. cor. on the N. bdy. of sec. 2.

The land is rolling and broken with considerable level areas. The soil is shallow and almost everywhere too rocky for cultivation. The formation is mostly volcanic.

There is a small amount of scrub cedar timber, suitable only for fuel and fencing purposes. The undergrowth is of the varieties usual in semi-arid Arizona; the growth is usually sparse and small.

There are no permanent streams; very little other water is available. Reservoirs have been built in secs. 28 and 36.

A wire drift fence has been built north-easterly across the south part of the township.

There are two small ore reduction mills and some mine developments in or near sec. 2; no operations are being carried on at this time. The township is only lightly mineralized.

A telephone line parallels the highway across the N. part of the township.

4-680  
(August, 1926)

**FIELD ASSISTANTS.**  
to

**Charles E. Hunter, U.S. Transitman**

NAMES.	CAPACITY.
Howard Beard	1st Chairman
W.B. Kniskern	2nd Chairman
E.G. Fish	Cornerman
David T. Ashbaugh	Flagman

CERTIFICATE OF UNITED STATES SURVEYOR

I, Charles E. Hunter U.S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer, for Group 161, Arizona bearing date of the 9th day of June, 1930, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the East Boundary West Boundary North Boundary and Subdivision Lines of Township 8 South, Range 30 East of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes and by diagram on page 1 hereof as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer, for Group 161, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place: Phoenix, Arizona
Date: January 8, 1932.

Charles E. Hunter
U.S. Transitman.

APPROVAL

OFFICE OF U. S. SUPERVISOR OF SURVEYS,
Denver, Colo., April 2, 1932.

The foregoing field notes of the survey of the East Boundary West Boundary North Boundary and Subdivision Lines of Township 8 South, Range 30 East of the Gila and Salt River Base and Meridian, in the State of Arizona executed by Charles E. Hunter, U.S. Transitman under his special instructions dated June 9, 1930 for Group 161, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U.S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above described surveys in has been correctly copied from the original notes on file in this office.

U. S. Supervisor of Surveys.