

BOOK 3923

FIELD NOTES

OF THE RESURVEY OF

Part of the West Boundary

and

Part of the Subdivision Lines of

Township 2 North, Range 7 East

AND OF THE SURVEY OF

East Boundary

Part (Completion) of the North Boundary

Part (Completion) of the Subdivision Lines

Meanders of Right and Left Banks of Salt River thru Secs. 1, 2 and 4
Meanders of Left Bank of Slough in sec. 4

Meanders of Part of Right Bank of Salt River in sec. 5

Meanders of Left Bank of Salt River thru secs. 5, 6, 7 and 18
And

Meanders of Islands in Salt River in secs. 4, 5, 7 and 18

Township 2 North, Range 7 East

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

Theodore Vander Meer U.S. Transitman

In the capacity of U. S. Surveyor, under Special Instructions dated January 8, 1930, issued by the District Cadastral Engineer to govern surveys included in Group No. 162 Arizona, which were approved by the Commissioner of the General Land Office, January 18, 1930, and Assignment Instructions dated February 21, 1930.

RESURVEY AND Survey commenced March 12, 1930

RESURVEY AND Survey completed January 15, 1932

3923


3923

Note; Meanders are indexed on the Diagram below in Red figures thus-62

INDEX DIAGRAM.

BOOK 3923

1A

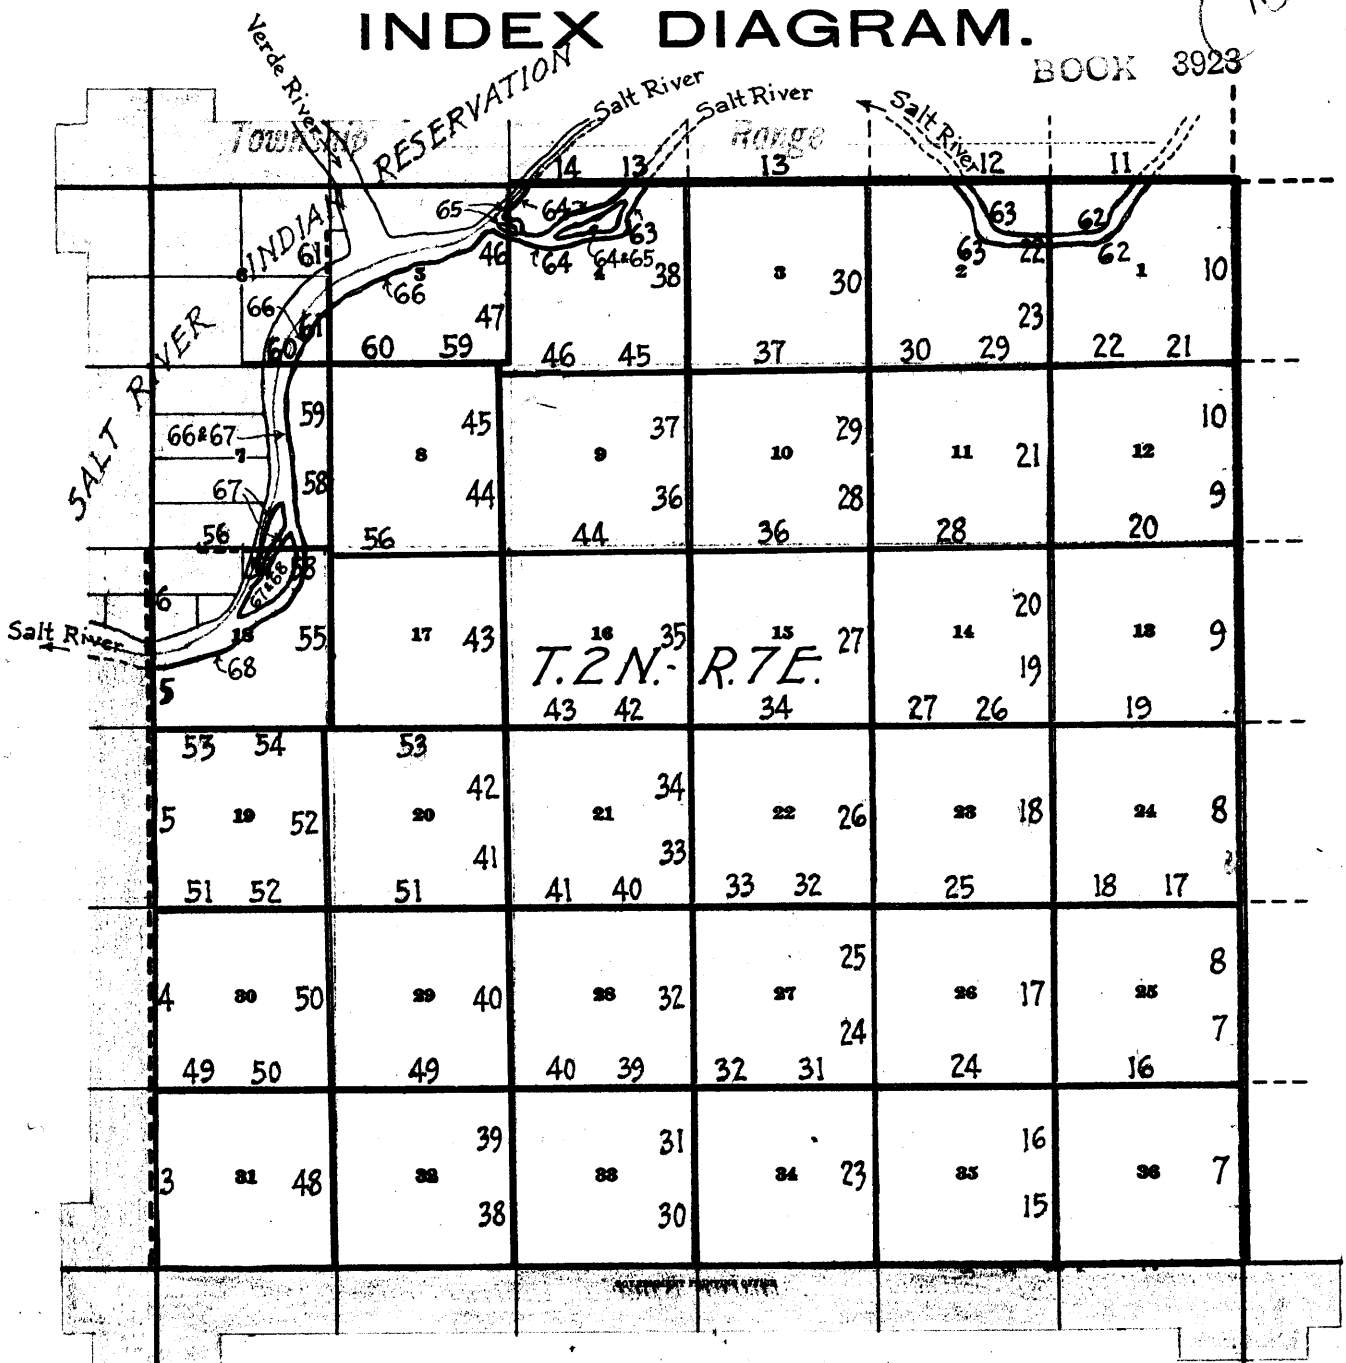


———— Lines surveyed under this group.

----- Lines resurveyed under this group.

———— Accepted surveyed lines.

----- Unsurveyed lines.



Surveyed areas of public land, as per accepted plats on file.



Surveyed areas of Indian Reservation, as per accepted plats on file.

~~~~~ Unsurveyed boundary of Salt River Indian Reservation.



Surveys herein described were executed on dates shown on diagram on page 1 hereof, by Theodore Vander Meer, U.S. Transitman, using Buff & Buff transit No. 9977, an instrument equipped with a full vertical circle and a Smith solar attachment. Unless otherwise specified all azimuth determinations are accomplished with the solar attachment.

March 11, 1930, at camp in sec. 33, T. 3 N., R. 7 E., G. & S. R. B. & M., Arizona, latitude  $33^{\circ}33\frac{1}{2}'$  N., longitude  $111^{\circ}38\frac{1}{2}'$  W., examine the adjustments of the transit and find no errors; then, to test the solar apparatus by comparing its indications resulting from a.m. and p.m. observations on the sun with a meridian established by observation on Polaris, proceed as follows:

At 8h. 17m. p.m., l.m.t., observe Polaris at western elongation, making four observations, two each with the telescope in direct and reversed positions, and mark the mean point in the line thus determined by a tack in a peg driven firmly in the ground about 5 chs. S.

March 12, 1930,  
lay off the azimuth of Polaris  $1^{\circ}17'$  to the West (of S.) and mark the meridian thus determined by a tack in a peg driven firmly in the ground about 5 chs. S.

At 8h. 0m., a.m., app. t., set off  $33^{\circ}33\frac{1}{2}'$  N. on the latitude arc,  $3^{\circ}24\frac{1}{2}'$  S. on the declination arc, and determine a meridian with the solar attachment, which agrees within  $1\frac{1}{2}'$  with the true meridian.

At app. noon, with the latitude arc unchanged, observe the sun on the meridian, and obtain a reading of  $3^{\circ}21'$  S. on the declination arc, which agrees within  $1'$  with the computed declination of the sun.

At 4h. 0m. p.m., app. t., with the latitude arc unchanged, set off  $3^{\circ}16\frac{1}{2}'$  S. on the declination arc, and determine a meridian with the solar attachment, which agrees within  $1\frac{1}{2}'$  with the true meridian.

As all of the solar observations made during the usual hours of solar work define positions for meridian which agree within  $1\frac{1}{2}'$  with the true meridian, conclude that the instrument is in satisfactory adjustment.

All measurements herein recorded were made with a Dallie steel tape 5.00 chs. in length, compared with a Lufkin standard steel tape 1.00 ch. in length, and found correct. The measurements are made on the slope, the vertical angles determined with clinometer, and the slope measurements properly reduced to true horizontal distances for entry in the field notes.

## Resurvey of Part of the West Boundary of T.2 N., R.7 E. BOOK 3923

## Chains

The West boundary of T.2 N., R.7 E. was surveyed in 1868 by G.P. Ingalls, U.S.D.S. The South 3 miles were resurveyed in 1900 by H. Santee; the North 2½ miles were resurveyed in 1910 by R.A. Farmer, U.S. Surveyor. No original corners other than the Tp. corners were found by the resurveys. The following notes describe a dependent resurvey of the South 4 miles of the line.

- 
- From the cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., hereinafter described,  
 South, on random line, bet. secs. 13 and 18.
- 20.00 Unable to find true point for N. 1/16th cor.  
 40.00 Unable to find ¼ sec. cor. Set temp. ¼ sec. cor.  
 80.29 Fall 1.85 chs. E. of the cor. of secs. 13, 18, 19 and 24,
- 
- South, on random line, bet. secs. 19 and 24.
- 40.00 Intersect ¼ sec. cor.  
 79.98 Fall 3 lks. E. of cor. of secs. 19, 24, 25 and 30.
- 
- South, on random line, bet. secs. 25 and 30.
- 40.00 ¼ sec. cor. bears 2 lks. W.  
 79.99 Fall 4 lks. E. of the cor. of secs. 25, 30, 31 and 36.
- 
- South, on random line, bet. secs. 31 and 36.
- 40.00 Unable to find ¼ sec. cor. Set temp. ¼ sec. cor.  
 79.96 Fall 5 lks. E. of the cor. of Ts. 1 and 2 N., Rs. 6 and 7 E., which is an iron post, 3 ins. diam., projecting 8 ins. above ground, firmly set, properly marked on brass cap, dated 1921, witnessed by a mound of stone S. of cor.
- Thence  
 N.0°02'E., on true line, bet. secs. 31 and 36.  
 Over gently rolling land; through desert growth.  
 Along W. side of road running N. and S. Across small washes running Westerly.
- 39.98 (Mid-point) Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for re-established ¼ sec. cor.; with brass cap marked
- S36 S31  
 1931
- Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor. Cabin bears N.62½°E., about 35 chs. dist.
- 42.20 Road from S. turns to NE.
- 79.96 Intersect the cor. of secs. 25, 30, 31 and 36, which is a rock, 12 x 8 x 6 ins. above ground, marked with 1 notch on S. and 5 notches on N. faces, from which  
 A palo verde, 6 ins. diam., bears S.27°E., 123 lks. dist., marks rotted (Old B.T.)  
 A palo verde, 8 ins. diam., bears S.50½°W., 144 lks. dist., marks partly legible (Old B.T.)  
 A palo verde stump bears N.38°W., 161 lks. dist., marks nearly gone (Old B.T.)  
 Beside the marked stone,  
 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 25, 30, 31 and 36, with brass cap marked

## Resurvey of Part of West Boundary of T.2 N., R.7 E.

Chains

T2N  
R6E R7E  
S25 S30  
S36 S31  
1930

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land: level.

Soil: sandy loam, 1st rate.

Timber: none.

Undergrowth: palo verde, mesquite, ironwood, cactus, greasewood, catclaw.

1.30 N.0°02'E., on true line, bet. secs. 25 and 30, (S $\frac{1}{2}$ )  
Over rolling desert land; through moderate undergrowth.  
A wood road, bears E. and W.  
Across series of dry washes, course W.

39.99 Intersect the  $\frac{1}{4}$  sec. cor., which is a granite stone, 10 x 6 by 8 ins. above ground, marked  $\frac{1}{4}$  on E. face, with no certain evidence of bearing trees. Adjoining E. side of stone,  
Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
S25 S30  
1930

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Thence N.0°02'E., on true line, on N. $\frac{1}{2}$  bet. secs. 25 and 30.  
Over rolling desert land; across dry washes, course W.

40.00 Intersect the cor. of secs. 19, 24, 25 and 30, which is a granite stone, 10 x 6 by 8 ins. above ground, marked with 2 grooves on S. and 4 grooves on N. faces, from which  
A palo verde, stump, 8 ins. diam., bears N.70°E., 100 lks. dist. (Old B.T.).  
An ironwood, 8 ins. diam., bears S.26°E., 120 lks. dist., marks illegible.  
A palo verde stump, 8 ins. diam., bears S.14°W., 102 lks. dist., marked BT (Old B.T.).  
No evidence of NW. tree.  
Along W. side of marked stone,  
Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 19, 24, 25 and 30, with brass cap marked

T2N  
R6E R7E  
S24 S29  
S25 S30  
1930

Raise mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Land: gently rolling.

Soil: gravel loam, 2nd rate.

Timber: ironwood.

Undergrowth: greasewood, mesquite, cactus, catclaw, palo verde, sotol.

Resurvey of Part of West Boundary of T.2 N., R.7 E. BOOK 8928

Chains

N.0°03'E., on true line, bet. secs. 19 and 24, (S½)  
 Over gently rolling land; thru desert growth.  
 1.70 Enter dry wash, course S.75°W.  
 3.50 Leave same.  
 7.10 Dry wash, 40 lks. wide, course W., wood road in bottom.  
 13.60 Dry wash, 50 lks. wide, course W. Asc. 21 ft. over S. slope.  
 19.70 Spur, slopes W. Desc. 30 ft. over N. slope.  
 36.30 Dry wash, 40 lks. wide, course W.  
 39.98 Intersect the ¼ sec. cor., which is a rock, 10 x 5 x 10  
 ins. above ground, firmly set, marked ¼ on W. face,  
 from which  
 A palo verde, 6 ins. diam., bears S.67°E., 72 lks.  
 dist.; marks partly legible (Old BT).  
 A palo verde, 6 ins. diam., bears S.77°W., 39 lks.  
 dist.; marks partly legible (Old BT).  
 Along W. side of marked stone  
 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the  
 ground and in a mound of stone to top, for ¼ sec. cor.,  
 with brass cap marked

¼  
 S24 | S19  
 1930

Thence  
 North, on true line, on N. ¼ bet. secs. 19 and 24.  
 Asc. 23 ft.

15.00 Spur, slopes NE. Desc. 110 ft. over gradual NW. slope.  
 28.50 Dry wash, 50 lks. wide, course NW. Along E. slope.  
 40.00 Intersect the true point for cor. of secs. 13, 18, 19 and  
 24, located from the original mound of stone and bear-  
 ing trees, from which point  
 Short stump of palo verde bears N.8½°E., 98 lks. dist.,  
 (Old BT).  
 A palo verde, 6 ins. diam., bears S.60°E., 88 lks.  
 dist., marks illegible (Old BT).  
 A palo verde, 4 ins. diam., bears S.2°W., 83 lks.  
 dist., marks rotted away (Old BT).  
 A palo verde, 6 ins. diam., bears N.65°W., 140 lks.  
 dist., marks rotted away (Old BT).

At point  
 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the  
 ground, for cor. of secs. 13, 18, 19 and 24, with brass  
 cap marked

T2N  
 R6E R7E  
 S13 | S18  
 S24 | S19  
 1930

Raise mound of stone, 3 ft. base, 3 ft. high, W. of cor.  
 Peak of quadrangular gate house on W. end of Granite  
 Reef dam bears N.40°17'W., about ½ mile dist.

Land: rolling.  
 Soil: gravel loam, 2nd and 3rd rates.  
 Timber: ironwood.  
 Undergrowth: palo verde, mesquite, catclaw, cactus,  
 greasewood.

N.2°38'E., on true line, bet. secs. 13 and 18, (S½)  
 Over rolling land; thru moderate undergrowth.  
 Desc. 40 ft. over NE. slope.  
 10.70 Enter dry wash, course NW.  
 13.70 Leave same; over bottom land.  
 19.14 Road, bears E. and W.

Resurvey of Part of West Boundary of T.2 N., R.7 E.

Chains

25.10 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for witness cor. to meander cor. of secs. 13 and 18, with brass cap marked

WC  
MC  
S13|S18  
R6E R7E  
T2N  
1932

from which

A willow, 12 ins. diam., bears N.20°E., 17 lks. dist., marked WC T2N R7E S18 MC BT.

A willow, 12 ins. diam., bears N.79°W., 70 lks. dist., marked WC T2N R6E S13 MC BT.

25.42 Left bank of Salt River, course W. True point for meander cor. falls on soft, insecure ground.

38.22 Right bank of same, water about 5 ft. deep adjoining banks, about 1 ft. deep between.

39.72 Left bank of old unused Arizona canal, course W.

40.20 Right bank of same, water 3 ft. deep.

40.33 (40.00 chs. South of cor. of secs. 7, 12, 13 and 18) Set an iron post, 3 ft. long, 1 in. diam., 33 ins. in the ground, for re-established 1/4 sec. cor., with brass cap marked

S13|S18  
1930

from which

A mesquite, 6 ins. diam., bears N.24°E., 29 lks. dist., marked 1/4 S18 BT.

A mesquite, 3 ins. diam., bears N.56°W., 31 lks. dist., marked BT.

Thence

North, on true line, on N. 1/4 bet. secs. 13 and 18.

Over bottom land, thru dense undergrowth.

20.00 (20.00 chs. South of the cor. of secs. 7, 12, 13 and 18)

Set an iron post, 3 ft. long, 1 in. diam., 32 ins. in the ground, for re-established N. 1/16th cor., with brass cap marked

N. 1/16  
S13|S18  
1930

The remains of the original N. 1/16th cor., the upper 14 ins. of an iron post with properly marked brass cap, which was found floating nearby (iron rusted away), is set 18 ins. deep beside new post, from which

A mesquite limb, 4 ins. diam., bears N.27°W., 27 lks. dist., marked BT.

No other suitable trees. Dig pits, 18 ins. square, 12 ins. deep, one each N. and S. of cor., 3 ft. dist.

40.00 Intersect the cor. of secs. 7, 12, 13 and 18; which is an iron post, 1 in. diam., projecting 6 ins. above ground, firmly set, with brass cap marked

S12 S7  
T2N R7E  
R6E  
S13|S18

witnessed by pits.

Land: level and rolling. Soil: loam, 1st rate.

Timber: willow and ironwood. Undergrowth: palo verde, mesquite, catclaw, cactus.



Chains

From the cor. of Ts. 1 and 2 N., Rs. 7 and 8 E., which is an iron post, 3 ins. diam., projecting 10 ins. above ground, firmly set, properly marked on brass cap, dated 1914, witnessed by a mound of stone, S. of cor.,

North, on true line, bet. secs. 31 and 36. Over flat; through heavy desert growth.

- 11.40 Dim road, bears NE. and SW.
- 15.50 Same, bears NW. and SE.
- 37.10 Ravine, course SE.

- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap marked




Raise mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Over rolling land.

Asc. 450 ft. over general SW. slope, to cor.

- 57.70 Drain, 60 lks. wide, course SW.
- 72.00 Drain, 20 lks. wide, course SW.

- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground, with cross (x) marked on boulder 1/4 lk. S., for cor. of secs 25, 30, 31 and 36, with brass cap marked



Raise mound of stone, 3 ft. base, 1 1/4 ft. high, around post. Land: flat and rolling.

Soil: loam, 1st and 2nd rate.

Timber: none.

Undergrowth: greasewood, palo verde, mesquite, cactus.

North, on true line, bet. secs. 25 and 30. Over mountainous land; through scattering undergrowth. Asc. 160 ft. over SW. slope.

- 6.20 Spur, slopes SW. Desc. 25 ft. over NW. slope.
- 8.10 Drain, course SW. Asc. 250 ft. over SW. slope, to ridge.
- 12.20 Cliff, 50 ft. high, faces SW.
- 13.20 Ridge, bears NW. and SE. Desc. 180 ft. over NE. slope.
- 22.70 Drain, course NE. Asc. 15 ft. over SE. slope.
- 23.70 Short spur, slopes E. Desc. 43 ft. over NE. slope.
- 25.20 Drain, course E. Asc. 43 ft. over SE. slope.
- 28.70 Spur, slopes E. Desc. 205 ft. over NE. slope.

- 39.90 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, with stone, marked with cross (x) deposited beside, with mound of stone, 5 ft. base, 2 ft. high, around post, for witness cor. to 1/4 sec. cor., with brass cap marked

Survey of East Boundary of T.2 N., R.7 E.

Chains

W C  
S25 | S30  
1930

40.00 True point for  $\frac{1}{4}$  sec. cor. falls on sloping bedrock.

Desc. 260 ft. over NE. slope.

41.83 Seep of water bears about 50 lks. East.

50.30 Drain, course NW.

Desc. 110 ft. over NW. slope.

64.90 Dry wash, 90 lks. wide, course NW.

67.50 Enter dry wash, 80 lks. wide, course N.20°W.

69.50 Leave same. Over flat.

78.30 Same wash, course NE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the ground, with stone, marked with cross (x) deposited beside, for cor. of secs. 19, 24, 25 and 30, with brass cap marked

T2N  
R7E | R8E  
S24 | S19  
S25 | S30  
1930

Raise mound of stone, 4 ft. base, 1 $\frac{1}{4}$  ft. high, around post.

Land: mountainous and level.

Soil: adobe loam, 3rd rate.

Timber: none.

Undergrowth: palo verde, mesquite, catclaw, greasewood, cactus, sage.

North, on true line, bet. secs. 19 and 24.  
Over rolling land; through scattering undergrowth.  
Desc. 70 ft. over NE. slope (to draw).

18.70 Enter dry wash, 16 ft. deep, course N.15°W.

23.10 Leave same, course now NE.

31.20 Draw, 50 lks. wide, course NE.

Asc. 40 ft. over SE. slope.

37.60 Over gentle N. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, with stone marked with cross (x) deposited beside, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
S24 | S19  
1930

Raise a mound of stone, 4 ft. base, 1 $\frac{1}{4}$  ft. high, around post.

Desc. 60 ft. over NE. slope.

53.00 Dry wash, 30 lks. wide, course NNE.

68.40 Dry wash, 40 lks. wide, course NE.

71.90 Same wash, course NW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 13, 18, 19 and 24, with brass cap marked

Chains

T2N  
 R7E R8E  
 S13 | S18  
 S24 | S19  
 1930

Raise mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Land: rolling.  
 Soil: gravel loam, 2nd rate.  
 Timber: none.  
 Undergrowth: palo verde, catclaw, cactus, mesquite,  
 ironwood, greasewood, sage.

-----  
 North, on true line, bet. secs. 13 and 18.  
 Over gently rolling land; through scattering undergrowth.

- 4.70 Dry wash, 15 lks. wide, course NE.
- 15.60 Dry wash, 30 lks. wide, course NE.
- 17.30 Wood road, bears SW. and NE.
- 22.80 Enter dry wash, course NE.
- 26.90 Leave same. Along rocky E. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for 1/4 sec. cor., with brass cap marked.

†  
 S13 | S18  
 1930

Raise mound of stone, 6 ft. base, 5 ft. high, W. of cor.

76.40 Drain, 5 lks. wide, course NW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, with brass cap marked.

T2N  
 R7E R8E  
 S12 | S7  
 S13 | S18  
 1930

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land: rolling.  
 Soil: rocky loam, 3rd rate.  
 Timber: cottonwood.  
 Undergrowth: greasewood, palo verde, pala Christa,  
 mesquite, catclaw, cactus.

-----  
 North on true line, bet. secs. 7 and 12.  
 Over gently rolling land; through scattering undergrowth.  
 Across small washes, course NNE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor., with brass cap marked.

1/4  
 S12 | S7  
 1930

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

## Survey of East Boundary of T.2 N., R.7 E.

## Chains

- 46.20 Dry wash, 5 lks. wide, course NE.  
 49.50 Dry wash, 30 lks. wide, course NW.  
 68.60 Wood road, bears NW. and SE.  
 69.70 Dry wash, 15 lks. wide, course NE.  
 77.10 Dry wash, 30 lks. wide, course NE.  
 80.00 True point for cor. of secs. 1, 6, 7 and 12 falls in wash.  
 At a point 96 lks. West of true point  
 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in  
 the ground, for witness cor. to cor. of secs. 1, 6, 7 and  
 12, with brass cap marked

T2N  
 R7E R8E  
 S1|S6  
 S12|S7 WC  
 1930

from which

- A palo verde, 8 ins. diam., bears N.56 $\frac{1}{2}$ °E., 184 lks.  
 dist., marked T2N R8E S6 WC BT.  
 A palo verde, 8 ins. diam., bears S.85°E., 48 lks.  
 dist., marked T2N R7E S12 WC BT.  
 A palo verde, 8 ins. diam., bears S.36°W., 72 lks.  
 dist., marked T2N R7E S12 WC BT.  
 A palo verde, 3 ins. diam., bears N.51°W., 29 lks.  
 dist., marked WC BT.  
 Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
 Land: gently rolling.  
 Soil: sandy loam, 1st rate.  
 Timber: none.  
 Undergrowth: palo verde, mesquite, catclaw, ironwood,  
 cactus, greasewood.

From true point for cor. of secs. 1, 6, 7 and 12,  
 North, on true line, bet. secs. 1 and 6.  
 Over gently rolling land; through scattering undergrowth.

- 1.00 Leave wash, course NNE.  
 15.30 Dry wash, 10 lks. wide, course N.10°W. Down general  
 course of same.  
 28.70 Leave wash, course NW.  
 32.70 Desc. 15 ft.  
 34.60 Dry wash, 20 lks. wide, course NW.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
 S1|S6  
 1930

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
 U.S.G.S. Triangulation Point bears S.62°52'W.

- 41.80 Short drain, course NE.  
 73.32 Telephone line, bears S.62 $\frac{1}{2}$ °W. and N.62 $\frac{1}{2}$ °E.  
 74.43 Power line, bears S.62°50'W. and N.62°50'E.  
 74.80 Highway, bears S.43°W. and NE.  
 82.48 Point of intersection of blank line run due East from the  
 meander cor. of secs. 4 and 33. At point  
 Set an iron post, 3 ft. long, 3 ins. diam., 32 ins. in the  
 ground, for cor. of Ts. 2 and 3 N., Rs. 7 and 8 E.,  
 with brass cap marked

Survey of East Boundary of T.2 N., R.7 E.

BOOK 3923

Chains

T3N  
 R7E R8E  
 S36 | S31  
 S 1 | S 6  
 T2N  
 1930

from which

- A palo verde, 6 ins. diam., bears N.38°E., 179 lks. dist., marked T3N R8E S31 BT.
- A palo verde, 10 ins. diam., bears S.12½°W., 52 lks. dist., marked T2N R7E S1 BT.
- A palo verde, 8 ins. diam., bears N.40½°W., 169 lks. dist., marked T3N R7E S36 BT.
- Raise mound of stone, 3 ft. high, 3 ft. base, S. of cor. U.S.G.S. Triangulation point bears S.17°18'W.
- Blue Point, a well-known cliff about 150 ft. high, bears about ¼ mile NE.; prominent from this cor.
- Land: gently rolling.
- Soil: sandy loam, 1st rate.
- No timber. Undergrowth: palo verde, mesquite, cactus, ironwood, greasewood.

SURVEY OF PART (completion) OF N. BDY. OF T.2 N., R.7 E.

- From the cor. of Ts. 2 and 3 N., Rs. 7 and 8 E., West, on N. bdy. of sec. 1.
- Over rolling land; thru scattering undergrowth.
- 1.50 Old road, bears N. and S. Over bench land.
- 10.00 Desc. 40 ft. over NW. slope.
- 14.70 Dry wash, 40 lks. wide, course N.
- 16.70 Old road, bears SE. and NW.
- 17.20 Old road, bears SW. and NE. Over lower bench.
- 38.70 (1.30 chs. East) Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for witness cor. to ¼ sec. cor., of sec. 1, only, with brass cap marked

WC  
 ¼ SI  
 1930

- Raise mound of stone, 3 ft. base, 3 ft. high, S. of cor.
- Desc. 20 ft. over NW. slope.
- 39.60 Left Bank of Salt River. Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, for meander cor., with brass cap marked

MC / SI  
 T2N  
 R7E  
 1932

- Raise mound of stone, 3 ft. base, 2 ft. high, E. of cor.
- 40.00 True point for ¼ sec. cor. falls in river.
- 42.40 Right Bank of Salt River. Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, for meander cor., with brass cap marked

SI / MC  
 T2N  
 R7E  
 1932

- Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.
- Over bottom land.
- 52.00 Leave same. Asc. 23 ft. over SE. slope.
- 53.70 Over bench land. Thru dense mesquite.
- 57.80 Dry wash, 20 lks. wide, course S.
- 72.00 Dry wash, 10 lks. wide, course SW.

Survey of Part (completion) of N. bdy. of T.2 N., R.7 E.

Chains

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 1 and 2, only, with brass cap marked

S2 | S1  
T2N R7E  
1930

from which  
A mesquite, 12 ins. diam., bears S. 71° E., 92 lks. dist., marked T2N R7E S1 BT.  
A mesquite, 5 ins. diam., bears S. 38° W., 73 lks. dist., marked T2N R7E S2 BT.

Land: rolling and flat.  
Soil: sandy, 1st rate.  
No timber. Undergrowth: mesquite, arrow-weed, catclaw, palo verde, ironwood, cactus.

West, on N. bdy. of sec. 2.

Over level land; thru dense undergrowth.

13.20 Dry wash, 25 lks. wide, course SW.

16.40 Old road, bears NE. and SW.

19.40 Dry wash, 10 lks. wide, course SW.

23.00 Desc. 30 ft. over W. slope.

28.40 Over bottom land, bears NW. and SE. Thru scattering undergrowth. Land is gravel bed reached by rare high waters of river.

38.42 Right bank of Salt River, course NW. Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for meander cor., with brass cap marked

MC | S2  
T2N  
R7E  
1932

Raise mound of stone, 3 ft. base, 2 ft. high, E. of cor.

40.00 True point for 1/4 sec. cor. falls in river.

42.35 Left Bank of Salt River, course N. 15° W. Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for meander cor., with brass cap marked

S2 | MC  
T2N  
R7E  
1932

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
Asc. 50 ft. over NE. slope.

43.50 Old ditch, 2 ft. wide, bears NW. and SE.

45.00 (5.00 chs. West) Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for witness cor. to 1/4 sec. cor., with brass cap marked

1/4 S2 | WC  
1930

Raise mound of stone, 3 ft. base, 2 ft. high, S. of cor.

47.60 An apiary bears about 3 chs. N. Over level land.

60.30 Secondary road, bears NE. and SW.

64.50 Secondary road, bears NW. and SE.

73.60 Secondary road, bears N. and SW.

76.80 Secondary road, bears NW. and SE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 2 and 3, only, with brass cap marked

S3 | S2  
T2N R7E  
1930

Survey of Part (completion) of N. Bdy. of T.2 N., R.7 E.

Chains

Raise mound of stone, 3 ft. base, 2 ft. high, S. of cor.  
 Land: level and rolling.  
 Soil: loam, 1st rate.  
 No timber. Undergrowth: mesquite, arrow-weed, grease-wood, cactus, catclaw.

West, on N. bdy. of sec. 3.  
 Over level land; thru scattering undergrowth.

- 0.30 Road, bears NW. and SE.
- 8.20 Road, bears NW. and SE.
- 15.80 Blue Point Ranger Station bears about 7 chs. N.
- 31.00 Secondary road, bears SW. and NE.
- 34.80 Secondary road, bears NE. and SW.
- 36.80 Secondary road, bears NE. and S.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 3, only, with brass cap marked

$\frac{1}{4}$  S3  
 1930

Raise mound of stone, 3 ft. base, 2 ft. high, S. of cor.

- 44.80 Desc. dirt bank, 23 ft. high, faces NW. Over gravel bed.
- 52.10 Mouth of dry wash,  $1\frac{1}{2}$  chs. wide, course N.
- 54.80 Asc. dirt bank, 16 ft. high, faces NE. Over flat.
- 71.70 Secondary road, bears NE. and SW.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 3 and 4, only, with brass cap marked

S4 | S3  
 T2N R7E  
 1930

Raise mound of stone, 3 ft. base, 3 ft. high, S. of cor.

Land: level.  
 Soil: loam, 1st rate.  
 No timber. Undergrowth: mesquite, catclaw, cactus, palo verde, greasewood.

West, on N. bdy. of sec. 4.  
 Over rolling land; thru dense undergrowth.

- 0.10 Sanchez' house bears S. 27° W., about 5 chs. dist.
- 0.15 Road, bears NW. and SE.
- 3.60 Road, bears N. and SW.
- 6.70 Fence, bears N. and S. Over gravelly bottom land. Thru scattering undergrowth.
- 9.30 Fence, bears SW. and NE., about 2 chs. to cor.
- 14.40 Road, bears SW. and NE.
- 18.51 Left Bank of Salt River, course SW. Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for meander cor., with brass cap marked

MC / S4  
 T2N  
 R7E  
 1932

Raise mound of stone, 3 ft. base, 2 ft. high, E. of cor.

- 24.03 Right Bank of same. Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, with stone, 14 x 10 x 8 ins., marked with cross (X) deposited at base, and in a mound of stone to top, for meander cor., with brass cap marked

Survey of Part (completion) of N. bdy. of T.2 N., R.7 E.

Chains

S4 / MC  
T2N /  
R7E /  
1932

Raise mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

32.10 Over gravel bottom land, reached by extreme high waters. Wood road, bears SE. and NW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor. of sec. 4, only, with brass cap marked

S4 /  
1930

Raise mound of stone, 2 ft. base, 1 1/2 ft. high, S. of cor.

64.10 Desc. dirt bank, 10 ft. high, faces SW. Over swamp. Thru dense arrow-weed.

70.19 The left bank of a former channel of river, now a slough, bears SW. and NE. Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for meander cor., with brass cap marked

MC / S4  
T2N /  
R7E /  
1932

No suitable witness available.

71.40 Center of slough, drains SW. Enter Salt River Indian Reservation.

72.60 Asc. gravel bank, 15 ft. high, faces SE.

73.94 Intersect the meander cor. of secs. 4 and 33, which is an iron post projecting 16 ins. above ground, firmly set in a mound of stone, with brass cap marked

S33 S  
M / T2N R  
C / R7E 19  
S4 R  
1911

74.94 Intersect the corner of secs. 4, 5, 32 and 33, which is an iron post, 1 in. diam., firmly set in a mound of stone. The brass cap originally on the iron post has been removed.

Land: rolling and flat.  
Soil: sand and gravel, 1st rate.  
Timber: cottonwood and mesquite.  
Undergrowth: arrow-weed, catclaw, cactus, palo verde, greasewood.



Boundaries of Township 2 North, Range 7 East  
 Latitudes, Departures and Closing Errors

| Line designated    | True bearing  | Distance | Latitudes |        | Departures |        |
|--------------------|---------------|----------|-----------|--------|------------|--------|
|                    |               |          | N.        | S.     | E.         | W.     |
| South Boundary     | N. 89° 44' W. | 477.57   | 2.22      |        |            | 477.57 |
| West Boundary      | N. 0° 02' E.  | 159.95   | 159.95    |        | .09        |        |
|                    | N. 0° 03' E.  | 39.98    | 39.98     |        | .03        |        |
|                    | North         | 40.00    | 40.00     |        |            |        |
|                    | N. 2° 38' E.  | 40.33    | 40.29     |        | 1.85       |        |
|                    | North         | 200.00   | 200.00    |        |            |        |
| North Boundary     | East          | 474.94   |           |        | 474.94     |        |
| East Boundary      | South         | 482.48   |           | 482.48 |            |        |
| Convergency        |               |          |           |        | .48        |        |
| Totals             |               |          | 482.44    | 482.48 | 477.39     | 477.57 |
|                    |               |          |           | 482.44 |            | 477.39 |
| Error in latitude  |               |          | 0.04      |        |            |        |
| Error in departure |               |          |           |        | 0.18       |        |

Chains

That part of T.2 N., R.7 E., which lies North of the Salt River, was surveyed in 1911 by R.A. Farmer, U.S.S. The following notes describe the completion of secs. 5, 6 and 7 by cardinal projection and the regular survey of the remainder of the subdivisions.

- From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., which is an iron post, 2 ins. diam., projecting 8 ins. above a mound of stone, firmly set, properly marked on brass cap, dated 1921,  
 N. 0° 01' W., on true line, bet. secs. 35 and 36.  
 Over rolling land; through scattering undergrowth.  
 Asc. 40 ft. over SE. slope.
- 5.00 Top of low Knoll.  
 Desc. 27 ft. over NE. slope.
  - 8.80 Over gentle SW. slope.
  - 10.40 Dry wash, 20 lks. wide, course SW.  
 Asc. 460 ft. over general S. slope, to  $\frac{1}{2}$  sec. cor.
  - 21.71 Drain, course SW.
  - 30.20 Drain, course SW.
  - 40.00 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, for  $\frac{1}{2}$  sec. cor., with brass cap marked
- 1  
 S35 | S36  
 1930
- Raise mound of stone, 3 ft. base, 3 ft. high, W. of cor.
- Over rough mountainous land.  
 Asc. 272 ft. over SE. slope, to 51.60 chs.
- 40.75 Spur, slopes SW.
  - 45.50 Ravine, course S. 65° W.
  - 46.10 Short spur, slopes SW.
  - 47.00 Ravine, course SW.
  - 51.60 Spur, slopes SW.  
 Desc. 100 ft. over NW. slope.
  - 54.90 Ravine, course NW.  
 Asc. 22 ft. over SW. slope.
  - 58.70 Spur, slopes NW.

Survey of Part(completion) of Subdivisions of T.2 N.,R.7 E.

Chains

- 61.40 Desc. 75 ft. over NW. slope.  
Ravine, course W.
- 62.70 Asc. 37 ft. over SW. slope.  
Spur, slopes W.
- 67.40 Desc. 46 ft. over NW. slope.  
Drain, course S.70°W.
- 80.00 Asc. 320 ft. over cliff faces S.70°W.
- 80.00 True point for cor. falls on sloping bedrock. At a point 30 lks. North of true point, Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in the ground, with stone, 12 x 12 x 4 ins., marked with cross (x) deposited beside, for witness cor. to cor. of secs. 25,26,35 and 36, with brass cap marked

T2N R7E  
S26 | S25  
S35 | S36  
 W C  
 1930

Raise mound of stone, 4 ft. base, 1½ ft. high, around post.

Land: rolling and mountainous.  
 Soil: rocky adobe, 3rd rate.  
 Timber: none.  
 Undergrowth: sage, palo verde, mesquite, catclaw, cactus, catclaw.

- 40.00 From true point for cor. of secs. 25,26,35 and 36. S.89°44'E., on random line, bet. secs. 25 and 36. Set temp. ¼ sec. cor.
- 79.94 Fall 4 lks. S. of the cor. of secs. 25,30,31 and 36, on the E. bdy. of the Tp. hereinbefore described. Thence N.89°46'W., on true line, bet. secs. 25 and 36. Over mountainous land; through scattering undergrowth. Along broken S. slopes.
- 2.40 Drain, course SW.
- 7.40 Drain, course SW.
- 35.00 Ravine, course SE.

- 39.97 Set an iron post, 3 ft. long, 1 in. dia., 16 ins. in the ground, with stone, 8 x 8 x 6 ins. deposited beside, for ¼ sec. cor., with brass cap marked

¼ S25  
S36  
 1930

Raise mound of stone, 3 ft. base, 1½ ft. high, around post.

- Asc. 800 ft. over general E. slope, to ridge.
- 42.90 Drain, course SE.
- 48.80 Drain, course SE.
- 52.00 Spur, slopes SE.
- 59.00 Drain, course SE.
- 65.30 Top of sandstone cliff, 200 ft. high, faces E.
- 74.30 Ridge bears N. and S.  
Desc. 240 ft. over cliffs facing W.
- 79.94 The true point for cor. of secs. 25,26,35 and 36.  
Land: mountainous.  
Soil: adobe and loam, 3rd rate.  
Timber: none.  
Undergrowth: palo verde, mesquite, catclaw, cactus, greasewood.

Chains From true point for cor. of secs. 25, 26, 35 and 36,  
 N.0°01'W., on true line, bet. secs. 25 and 26.  
 Over mountainous land; through scattering undergrowth.  
 Asc. 340 ft. along rugged W. slope.  
 15.70 Spur, slopes W. Along top of ridge, bears N. and S.25°E.  
 Desc. 232 ft. over N. slope.  
 31.70 Pass in ridge. Asc. 150 ft. over S. slope.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the  
 ground, with stone, 10 x 8 x 8 ins., marked with cross  
 (x) deposited beside, for  $\frac{1}{4}$  sec. cor., with brass cap  
 marked

$\frac{1}{4}$   
 S26|S25  
 1930

Raise mound of stone, 3 ft. base, 1 $\frac{1}{4}$  ft. high, around post.  
 Asc. 27 ft. over SW. slope.  
 40.70 Over flat top of hill.  
 43.60 Desc. 130 ft. over N. slope.  
 51.80 Pass in ridge. Asc. 20 ft. over SW. slope.  
 53.70 Rock nubbin bears 50 lks. E.  
 Desc. 420 ft. over general NE. slope.  
 65.20 Ravine, course NE.  
 Asc. 25 ft. over SE. slope.  
 68.60 Spur, slopes NE.  
 Desc. 345 ft. over general NE. slope.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in  
 the ground, with stone, marked with cross (x) deposited  
 beside, for cor. of secs. 23, 24, 25 and 26, with brass  
 cap marked

T2N|R7E  
 S23|S24  
 S26|S25  
 1930

Raise mound of stone, 3 ft. base, 1 ft. high, around post.  
 Land: mountainous.  
 Soil: adobe loam, 3rd rate.  
 Timber: none.  
 Undergrowth: palo verde, greasewood, cactus, catclaw.

S.89°46'E., on random line, bet. secs. 24 and 25.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.98 Fall 2 lks. S. of the cor. of secs. 19, 24, 25 and 30, on  
 the E. bdy. of the Tp. hereinbefore described.  
 Thence  
 N.89°47'W., on true line, bet. secs. 24 and 25.  
 Over rolling land; through scattering undergrowth.  
 3.30 Dry wash, 20 lks. wide, course N.  
 7.80 Dry wash, 15 lks. wide, course NE.  
 8.70 Dry wash, 10 lks. wide, course NE.  
 12.70 Ravine, 20 lks. wide, course NNE.  
 Asc. 35 ft. over E. slope.  
 17.10 Over flat spur, slopes NE.  
 24.30 Leave same. Desc. 15 ft.  
 26.50 Dry wash, 20 lks. wide, course NNE.  
 Asc. 78 ft. over NE. slope.  
 33.50 Spur, slopes NNE.  
 Desc. 35 ft. over NW. slope.

## Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.

| Chains |                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 38.30  | Dry wash, 10 lks. wide, course NE.<br>Asc. 35 ft. over E. slope.                                                                                                                                                                                                                                                                                                                                |
| 39.99  | Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, with stone, marked with cross (x) deposited beside, for $\frac{1}{4}$ sec. cor., with brass cap marked<br><br>$\begin{array}{r} \frac{1}{4}S24 \\ \frac{1}{4}S25 \\ 1930 \end{array}$ <p>Raise mound of stone, 3 ft. base, 1 ft. high, around post.<br/>Across series of spurs and ravines, about 50 ft. deep, course NE.</p> |
| 79.98  | The cor. of secs. 23, 24, 25 and 26.<br><br>Land: rolling.<br>Soil: adobe loam, 2nd rate.<br>Timber: none.<br>Undergrowth: palo verde, mesquite, catclaw, cactus, greasewood.                                                                                                                                                                                                                   |
| -----  |                                                                                                                                                                                                                                                                                                                                                                                                 |
|        | N.0°01'W., on true line, bet. secs. 23 and 24.<br>Over rolling land; through scattering undergrowth.<br>Desc. 40 ft. over N. slope.                                                                                                                                                                                                                                                             |
| 1.90   | Ravine, course NW.<br>Asc. 12 ft.                                                                                                                                                                                                                                                                                                                                                               |
| 2.90   | Short spur, slopes W.<br>Desc. 75 ft. along W. slope.                                                                                                                                                                                                                                                                                                                                           |
| 12.00  | Same ravine, course NE.<br>Desc. 100 ft. over general N. slope.                                                                                                                                                                                                                                                                                                                                 |
| 27.80  | Dry wash, 10 lks. wide, course NE.                                                                                                                                                                                                                                                                                                                                                              |
| 31.20  | Enter dry wash, course NE.                                                                                                                                                                                                                                                                                                                                                                      |
| 35.50  | Leave same.                                                                                                                                                                                                                                                                                                                                                                                     |
| 37.90  | Road, bears NE. and W.                                                                                                                                                                                                                                                                                                                                                                          |
| 38.50  | Dry wash, 30 lks. wide, course NE.                                                                                                                                                                                                                                                                                                                                                              |
| 40.00  | Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, supported by a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap marked<br><br>$\begin{array}{r} \frac{1}{4} \\ S23 S24 \\ 1930 \end{array}$ <p>Raise mound of stone, 3 ft. base, 3 ft. high, W. of cor.<br/><br/>Asc. 22 ft. over S. slope.</p>                                                                    |
| 43.80  | Low spur, slopes SE.<br>Desc. 29 ft. over NE. slope.                                                                                                                                                                                                                                                                                                                                            |
| 48.90  | Dry wash, 40 lks. wide, course E.<br>Asc. 50 ft. over SE. slope.                                                                                                                                                                                                                                                                                                                                |
| 61.30  | Drain, course E.<br>Asc. 45 ft. over SE. slope.                                                                                                                                                                                                                                                                                                                                                 |
| 70.20  | Drain, course E.<br>Asc. 75 ft. over SE. slope.                                                                                                                                                                                                                                                                                                                                                 |
| 77.50  | Spur, slopes E.<br>Desc. 15 ft. over NE. slope.                                                                                                                                                                                                                                                                                                                                                 |
| 80.00  | Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 13, 14, 23 and 24, with brass cap marked<br><br>$\begin{array}{r} T2N R7E \\ S14 S13 \\ S23 S24 \\ 1930 \end{array}$                                                                                                                                                                                       |

Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.

Chains

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land: heavy rolling.  
Soil: adobe loam, 3rd rate.  
Timber: none.  
Undergrowth: palo verde, catclaw, greasewood, cactus, mesquite.

- S. 89° 47' E., on random line, bet. secs. 13 and 24.  
40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
79.98 Fall 2 lks. S. of the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp. hereinbefore described.  
Thence  
N. 89° 48' W., on true line, bet. secs. 13 and 24.  
Over rolling land; through scattering undergrowth.  
Asc. 20 ft. over SE. slope.  
2.30 Short spur, slopes NE.  
5.50 Dry wash, 15 lks. wide, course NE.  
6.10 Dry wash, 15 lks. wide, course NE.  
9.80 Spur, slopes NE.  
18.90 Wood road, bears SW. and NE.  
21.50 Draw, course NE.  
29.50 Dry wash, 15 lks. wide, course NE.  
30.10 Dry wash, 10 lks. wide, course NNE.  
33.90 Draw, course NE.  
38.50 Dry wash, 20 lks. wide, course NE.  
39.99 Set an iron post, 3 ft. long, 1 in. diam., 32 ins. in the ground, for  $\frac{1}{2}$  sec. cor., with brass cap marked

S13  
S24  
1950

Raise mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

- 47.70 Wood road, bears S. and NW.  
56.80 Dry wash, 10 lks. wide, course NNE.  
61.10 Dry wash, 15 lks. wide, course NNE.  
64.00 Dry wash, 10 lks. wide, course NE.  
Asc. 231 ft. over general E. slope.  
79.98 The cor. of secs. 13, 14, 23 and 24.  
Land: rolling.  
Soil: adobe loam, 2nd rate.  
Timber: none.  
Undergrowth: palo verde, mesquite, greasewood, cactus, catclaw, ironwood.

- N. 0° 01' W., on true line, bet. secs. 13 and 14.  
Over rolling land; through scattering undergrowth.  
Desc. 36 ft. over N. slope.  
1.30 Ravine, course NE.  
Asc. 18 ft. over SE. slope.  
10.00 Spur, slopes NE.  
Desc. 91 ft. over NW. slope.  
13.40 Ravine, course NE.  
Asc. 37 ft. over SE. slope.  
19.10 Spur, slopes NE.  
Desc. 190 ft. over NW. slope, to cor.  
28.20 Drain, course NE.  
30.00 Spur, slopes NE.  
34.80 Dry wash, 25 ft. wide, course NE.

Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.

Chains

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

S14  $\frac{1}{4}$  S15  
1930

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Desc. 208 ft. over general NW. slope, to cor.

61.50 Drain, course NW.

66.50 Dry wash, 20 lks. wide, course NW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 11, 12, 13 and 14, with brass cap marked

T2N | R7E  
S11 | S12  
S14 | S13  
1930

Raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Land: rolling.

Soil: adobe loam, 2nd rate.

Timber: none.

Undergrowth: palo verde, greasewood, catclaw, cactus, mesquite, ironwood.

40.00 S. 89° 48' E., on random line, bet. secs. 12 and 13. Set temp.  $\frac{1}{4}$  sec. cor.

79.79 Fall 9 lks. N. of the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp. hereinbefore described.

Thence

N. 89° 44' W., on true line, bet. secs. 12 and 13.

Over rolling land; through scattering undergrowth.

Desc. 12 ft.

5.60 Dry wash, 20 lks. wide, course NW.

Asc. 12 ft.

8.80 Dry wash, 20 lks. wide, 4 ft. deep, course NW.

11.00 Dry wash, 25 lks. wide, course NW.

Asc. 16 ft.

16.20 Spur, slopes NW.

Desc. 16 ft. over short SW. slope.

17.50 Draw, course NW. Over mountainous land.

Asc. 247 ft. over rocky NE. slope.

24.90 Rocky butte projects NW.

Desc. 190 ft. over W. slope.

32.70 Dry wash, 40 lks. wide, course NNW.

Over gently rolling land.

37.10 Wood road, bears N. and S.

39.89 Set an iron post, 3 ft. long, 1 in. diam., 32 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

S12  
S13  
1930

Raise mound of stone, 3 ft. base, 3 ft. high, N. of cor.

40.90 Dry wash, 30 lks. wide, course N.

45.60 Dry wash, 15 lks. wide, course NE.

63.80 Dry wash, 40 lks. wide, course N.

72.80 Dry wash, 20 lks. wide, course NE.

Survey of Part(completion) of Subdivisions of T.2 N., R.7 E.

BOOK 3923

Chains

- 75.50 Small dry wash, course N.
- 79.79 The cor. of secs. 11,12,13 and 14.  
Land: level, rolling and mountainous.  
Soil: sand and adobe, 2nd rate.  
No timber. Undergrowth: palo verde, mesquite, catclaw, cactus, greasewood, ironwood.

---

- N.0°01'W., bet. secs. 11 and 12.  
Over rolling land; thru scattering undergrowth.  
Desc. 54 ft. over general N. slope.
- 16.60 Dry wash, 15 lks. wide, course NE. Desc. 55 ft.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, with stone, 8 x 8 x 4 ins., marked with cross (X) deposited beside, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap marked  

$\frac{1}{4}$   
 S11 | S12  
 1930
- Desc. 23 ft. over general N. slope.
- 50.40 Dry wash, 40 lks. wide, course NW.
- 57.00 Dry wash, 30 lks. wide, course NW. Asc. 23 ft. over SW. slope.
- 67.00 Spur, slopes NW. Desc. 80 ft. over NW. slope.
- 72.90 Dry wash, 30 lks. wide, course NW.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 1,2,11 and 12, with brass cap marked  

T2N R7E  
 S2 | S1  
 S11 | S12  
 1930
- Raise mound of stone, 3 ft. base, 3 ft. high, W. of cor.  
Land: rolling.  
Soil: sand and loam, 2nd rate.  
No timber. Undergrowth: palo verde, mesquite, cactus, greasewood, catclaw.

---

- S.89°44'E., on random line, bet. secs. 1 and 12.
- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
- 78.80 The witness cor. to cor. of secs. 1,6,7 and 12 bears 4 lks. S., hereinbefore described.
- 79.76 Fall 4 lks. N. of the true point for cor. of secs. 1,6, 7 and 12, on the E. bdy. of the Tp., hereinbefore described.  
Thence  
N.89°42'W., on true line, bet. secs. 1 and 12.  
Over rolling land; thru scattering undergrowth.
- 0.30 Leave dry wash, course N.
- 0.96 The witness cor. to cor. of secs. 1,6,7 and 12 (96 lks. W. of cor. point)  
Asc. 10 ft. over gentle E. slope.
- 4.00 Low spur, slopes NW. Desc. 20 ft. over W. slope.
- 8.50 Wood road, bears SE. and NNW.
- 10.20 Dry wash, 50 lks. wide, course N. Asc. 34 ft. over NE. slope.
- 16.50 Spur, slopes NW. Desc. 32 ft.
- 23.80 Dry wash, 15 lks. wide, course NW.
- 27.70 Dry wash, 20 lks. wide, course NW.
- 32.80 Junction of dry washes from SW. and SE., course N.
- 39.88 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.

Chains

$\frac{1}{4}$  S1  
S12  
1930

- Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.
- 43.90 Spur, slopes N. Asc. 43 ft. over SE. slope.
- 51.70 Small hill, on line. Desc. 48 ft. over SW. slope.
- 54.40 Dry wash, 30 lks. wide, course NW.
- 57.80 Low spur, slopes N.
- 60.50 Dry wash, 30 lks. wide, course N.
- 75.00 Dry wash, 30 lks. wide, course NW.
- 77.00 Small ravine, course NW.
- 78.20 Wood road, bears NW. and SE.
- 79.00 Dry wash, 10 lks. wide, course NW.
- 79.76 The cor. of secs. 1, 2, 11 and 12.

Land: rolling.  
Soil: adobe loam, 2nd rate.  
No timber.  
Undergrowth: palo verde, mesquite, greasewood, cactus, catclaw.

- North, on random line, bet. secs. 1 and 2.
- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
- 82.05 Fall 21 lks. E. of the cor. of secs. 1 and 2, only, on the N. bdy. of the Tp. hereinbefore described.
- Thence S.0°09'E., on true line, bet. secs. 1 and 2.
- Over rolling land; thru dense undergrowth.
- Desc. gentle S. slope.
- 23.00 Desc. dirt bank, 25 ft. high, bears E. and W.
- 23.60 Right bank of Salt River, course W. Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for meander cor., with brass cap marked

T2N | R7E  
S2 | S1  
MC  
1932

- Raise mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
- 26.69 Left bank of same, water 2 ft. deep. Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for meander cor., with brass cap marked

MC  
S2 | S1  
T2N R7E  
1932

- Raise mound of stone, 3 ft. base, 1½ ft. high, S. of cor.
- Over gravel bottom land. Thru scattering undergrowth.
- 32.20 Asc. dirt bank, 40 ft. high, bears E. and W. Asc. slowly over general NW. slope.
- 36.00 Power line, bears S.79°03'W. and N.79°03'E.
- 37.53 Telephone line, parallels power line.
- 38.65 Highway, bears NE. to Stewart Mt. dam and SW. to Mesa.
- 42.05 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$  S2 | S1  
1930



Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.

Chains

Raise mound of stone, 2 ft. base, 2 ft. high, W. of cor.

- 43.40 Wood road, bears SE. and NW.
- 44.90 Dry wash, 30 lks. wide, course NW.  
Asc. 45 ft. over NW. slope.
- 53.70 Spur, slopes W.  
Desc. 19 ft. over SW. slope.
- 55.50 Dry wash, 30 lks. wide, course NW.
- 56.70 Spur, slopes NW.  
Asc. 19 ft. over NW. slope.
- 67.30 Spur, slopes NW.
- 71.00 Draw, course NW.
- 73.20 Spur, slopes NW.  
Desc. 25 ft. over S. slope.
- 75.20 Dry wash, 10 lks. wide, course NW.
- 78.10 Wood road, bears NW. and SE.
- 81.70 Small ravine, course W.

82.05 The cor. of secs. 1, 2, 11 and 12.

Land: rolling.  
 Soil: gravel and adobe loam, 2nd rate.  
 Timber: none.  
 Undergrowth: mesquite, cactus, palo verde, catclaw,  
 greasewood.

-----

From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the T<sub>2</sub>, which is an iron post, 2 ins. diam., projecting 8 ins. above ground, firmly set and properly marked on brass cap, dated 1921, witnessed by pits, N.0°01'W., on true line, bet. secs. 34 and 35.  
 Over flat; through moderate undergrowth.

- 25.00 Dry wash, 15 lks. wide, course SW.
- 29.71 Dry wash, 5 lks. wide, course SE.


40.00 Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in the ground, supported by a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked



Raise mound of stone, 3 ft. base, 3 ft. high, W. of cor. Cor. stands on W. edge of N. and S. wood road.

- 41.50 Wood road, bears N.5°W. and S.5°E.
- 56.10 Same road, bears NE. and SW.
- 66.50 Draw, course SW.
- 74.60 Enter dry wash, course SW.
- 77.60 Leave same.
- 78.50 Desc. 9 ft. over NW. slope.
- 79.40 Enter dry wash, course SW.

80.00 True point for cor. of secs. 26, 27, 34 and 35 falls in wash. At a point 16 lks. East of true point, Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for witness cor. to cor. of secs. 26, 27, 34 and 35, with brass cap marked



Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.

Chains

Raise mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Land: flat.

Soil: sandy loam and adobe, 1st rate.

Timber: none.

Undergrowth: palo verde, ironwood, greasewood, cactus, catclaw, mesquite.

From true point for cor. of secs. 26, 27, 34 and 35, S. 89°44' E., on random line, bet. secs. 26 and 35.

40.00 Set temp. 1/4 sec. cor.

80.00 Fall 2 lks. N. of the true point for cor. of secs. 25, 26, 35 and 36.

Thence

N. 89°43' W., on true line, bet. secs. 26 and 35.

Over mountainous land; through scattering undergrowth.

Desc. 678 ft. over rocky W. slope.

34.10 Ravine, course SW. Over rolling land.

37.00 Ravine, course SW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor., with brass cap marked

1/4 S26  
1/4 S35  
1930

Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.

46.60 Dry wash, 10 lks. wide, course SW.

56.20 Dry wash, 20 lks. wide, course SW.

58.00 Dry wash, 10 lks. wide, course S.

72.20 Dry wash, 40 lks. wide, course SW.

75.30 Dry wash, 10 lks. wide, course SW.

79.84 The witness cor. to cor. of secs. 26, 27, 34 and 35, (16 lks. E. of cor. point) Thence across wash.

80.00 Intersect the true point for cor. of secs. 26, 27, 34 and 35.

Land: rolling and mountainous.

Soil: gravel and adobe, 2nd and 3rd rate.

Timber: none.

Undergrowth: palo verde, catclaw, cactus, mesquite, greasewood.

From true point for cor. of secs. 26, 27, 34 and 35, N. 0°01' W., on true line, bet. secs. 26 and 27.

Over flat; through moderate undergrowth.

1.70 Leave dry wash, course S. 25° W.

5.10 Dry wash, 15 lks. wide, course S. 15° W.

16.00 Dry wash, 15 lks. wide, course SW.

21.00 Dry wash, 10 lks. wide, course SW.

33.20 Dry wash, 40 lks. wide, course SW.

38.90 Dry wash, 30 lks. wide, course SW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap marked

1/4 S27 | S26  
1930

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

59.70 Dry wash, 10 lks. wide, course W.

Survey of Part (completion) of Subdivisions of T.2 N., R.7 E. BOOK 3923

Chains

- 65.40 Dry wash, 10 lks. wide, course SW.
- 75.50 Dry wash, 10 lks. wide, course SW.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 23 ins. in the ground, for cor. of secs. 22, 23, 26 and 27, with brass cap marked

T2N, R7E  
 S22 | S23  
 S27 | S26  
 1930

Raise mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Land: gently rolling.  
 Soil: sandy and adobe loam, 1st rate.  
 Timber: none.  
 Undergrowth: palo verde, mesquite, catclaw, greasewood, cactus.

- 40.00 S. 89°43'E., on random line, bet. secs. 23 and 26. Set temp. 1/4 sec. cor.
- 79.74 Intersect the cor. of secs. 23, 24, 25 and 26. Thence N. 89°43'W., on true line, bet. secs. 23 and 26. Over rolling land; through scattering undergrowth. Asc. 20 ft. over NE. slope.
- 8.10 Short spur, slopes N. Desc. 36 ft. over NW. slope.
- 10.00 Head of wash, course NW. Asc. 103 ft. over NE. slope.
- 13.90 Divide, bears N. and S., slopes N. Desc. 165 ft. over general W. slope, to cor.
- 18.45 Head of dry wash, course NW.
- 24.45 Dry wash, 15 lks. wide, course NW.
- 34.85 Dry wash, 10 lks. wide, course NNW.
- 37.90 Dry wash, 10 lks. wide, course NW.
- 39.87 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for 1/4 sec. cor., with brass cap marked

1/4 S23  
 1/4 S26  
 1930

Raise mound of stone, 3 ft. base, 3 ft. high, N. of cor.

Desc. 90 ft. over general W. slope, to cor.

- 45.30 Drain, course NW.
- 54.80 Dry wash, 20 lks. wide, course NW.
- 57.30 Dry wash, 15 lks. wide, course NW.
- 61.50 Dry wash, 15 lks. wide, course N. 75°W.
- 64.90 Dry wash, 25 lks. wide, course NW.
- 68.50 Circular stone lime kiln, 12 ft. diam., 15 ft. high, bears 20 lks. N.

79.74 The cor. of secs. 22, 23, 26 and 27.

Land: rolling.  
 Soil: gravel and adobe loam, 2nd rate.  
 Timber: none.  
 Undergrowth: palo verde, greasewood, mesquite, cactus, catclaw.

## Survey of Part(completion) of subdivisions of T.2 N., R.7 E.

Chains

- N.0°01'W., on true line, bet. secs. 22 and 23.  
Over rolling land; through scattering undergrowth.
- 2.30 Small dry wash, course NW.  
7.60 Dry wash, 15 lks. wide, course NW.  
12.40 Dry wash, 15 lks. wide, course NW.  
19.80 Dry wash, 20 lks. wide, course NW.  
29.40 Dry wash, 20 lks. wide, course NW.  
32.20 Wood road, bears E. and W.  
Asc. 52 ft. over S. slope, to  $\frac{1}{4}$  sec. cor.  
37.20 Drain, course SW.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

1  
S22|S23  
1930

Raise mound of stone, 3 ft. base, 3 ft. high, W. of cor.

- 40.40 Low spur, slopes NW.  
43.80 Small hill bears about 7 chs. W. Desc. 63 ft. over NE. slope.  
49.10 Enter series of dry washes, course NW.  
49.40 Wood road, bears NW. and SE. course NW.  
52.20 Leave washes.  
Asc. 25 ft. over SW. slope.  
53.50 Asc. 25 ft. over SW. slope.  
57.70 Low spur, slopes W.  
Desc. 25 ft. over NW. slope.  
62.90 Gully, course W.  
68.90 Dry wash, 12 lks. wide, course SW.  
73.50 Dry wash, 20 lks. wide, course NW.  
78.50 Dry wash, 20 lks. wide, course W.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 14, 15, 22 and 23, with brass cap marked

T2N|R7E  
S15|S14  
S22|S23  
1930

Raise mound of stone, 4 ft. base, 4 ft. high, W. of cor.

Land: rolling.  
Soil: gravel and adobe loam, 2nd rate.  
Timber: none.  
Undergrowth: palo verde, mesquite, catclaw, cactus, greasewood.

- S.89°45'E., on random line, bet. secs. 14 and 23.  
40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
79.60 Fall 7 lks. S. of the cor. of secs. 13, 14, 23 and 24.  
Thence  
N.89°46'W., on true line, bet. secs. 14 and 23.  
Over rolling and mountainous land; through scattering undergrowth.  
Asc. 550 ft. over general NE. slope, to 27.30 chs.
- 0.40 Spur, slopes NE.  
15.40 Spur, slopes NE.  
27.80 Top of hill.  
28.10 Spurs slopes SW. and S.75°E.  
Desc. 311 ft. over general SW. slope, to  $\frac{1}{4}$  sec. cor.  
33.70 Spur, slopes N.75°W.
- 39.80 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.  
BOOK 3923

Chains

1/4 S14  
S23  
1930

Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.  
 Desc. 109 ft. over SW. slope.  
 44.00 Ravine, course SW. Along S. slope.  
 48.70 Spur, slopes SW.  
 Desc. 265 ft. over SW. slope.  
 64.00 Ravine, course NW.  
 Asc. 16 ft. over NE. slope.  
 66.20 Spur, slopes NW.  
 Along N. slope.  
 66.50 Change of slope; desc. 120 ft. over SW. slope.  
 79.60 The cor. of secs. 14, 15, 22 and 23.

Land: mountainous.  
 Soil: rocky adobe loam, 2nd and 3rd rates.  
 Timber: none.  
 Undergrowth: palo verde, mesquite, greasewood, cactus,  
 catclaw.

N.0°01'W., on true line, bet. secs. 14 and 15.  
 Over rolling land; through moderate undergrowth.  
 Desc. 100 ft. over general NW. slope, to 1/4 sec. cor.

9.60 Dry wash, 50 lks. wide, course NW.  
 15.50 Small dry wash, course NW.  
 18.20 Junction of two small dry washes, course NW.  
 24.70 Junction of two small dry washes, course NW.  
 30.00 Draw, course NW.  
 37.70 Draw, course NW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the  
 ground, with stone, 10 x 8 x 6 ins., marked with cross  
 (x) deposited beside, for 1/4 sec. cor., with brass cap  
 marked

1/4  
S15|S14  
1930

Raise mound of stone, 3 ft. base, 1 1/4 ft. high, around  
 post.  
 Desc. 95 ft. over general NW. slope, to cor.

40.20 Draw, course W.  
 47.10 Dry wash, 25 lks. wide, course W.  
 58.80 Enter dry wash, course N.25°W.  
 61.30 Leave same.  
 69.30 Small dry wash, course N.10°E.  
 79.00 Highway drain ditch, course NE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 32 ins. in  
 the ground, for cor. of secs. 10, 11, 14 and 15, with  
 brass cap marked

T2N|R7E  
S10|S11  
S15|S14  
1930

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

## Survey of Part(completion) of Subdivisions of T.2 N.,R.7 E.

Chains

Land: rolling.  
Soil: adobe loam, 2nd and 3rd rates.  
Timber: none.  
Undergrowth: palo verde, catclaw, cactus, sotol,  
greasewood, mesquite.

- S. 89°46'E., on random line, bet. secs. 11 and 14.  
40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
79.90 Fall 12 lks. N. of the cor. of secs. 11, 12, 13 and 14.  
Thence  
N. 89°41'W., on true line, bet. secs. 11 and 14.  
Over rolling land; through scattering undergrowth.  
2.00 Dry wash, 10 lks. wide, course NNW.  
4.60 Dry wash, 50 lks. wide, course N.20°E.  
Asc. 27 ft.  
7.60 Spur, slopes N.  
11.10 Drain, slopes NW.  
Desc. 25 ft. over W. slope.  
13.50 Dry wash, 30 lks. wide, course N.  
Asc. 25 ft. over E. slope.  
18.20 Spur, slopes N.  
Desc. 30 ft. over W. slope.  
26.60 Draw, course N.  
Asc. 30 ft. over SE. slope.  
27.50 Spur, slopes NNE.  
Desc. 23 ft. over NW. slope.  
28.20 Draw, course NNE.  
Asc. 66 ft. over E. slope.  
31.70 Spur, slopes NNE.  
Along N. slope.  
39.95 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the  
ground, with stone, marked with cross (x) deposited  
beside, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$  S11  
S14  
1930

Raise mound of stone, 4 ft. base, 1 $\frac{1}{2}$  ft. high, around  
post.

- 40.70 Short spur, slopes N.  
Asc. 118 ft. over NE. slope.  
48.30 Spur, slopes NE.  
Desc. 171 ft. over NW. slope.  
59.50 Dry wash, 60 lks. wide, course NNW.  
Asc. 17 ft. over NE. slope.  
68.50 Low spur, slopes NW. Desc. 20 ft.  
71.80 Dry wash, 60 lks. wide, course N.  
78.00 Dry wash, 10 lks. wide, course NNW.  
79.20 Highway drain ditch, course NE  
79.90 The cor. of secs. 10, 11, 14 and 15.

Land: rolling.  
Soil: rocky and sandy, adobe loam, 2nd rate.  
Timber: none.  
Undergrowth: palo verde, cactus, catclaw, greasewood,  
mesquite, sotol.

- N. 0°01'W., on true line, bet. secs. 10 and 11.  
Over flat; through moderate undergrowth.  
Desc. about 100 ft. over general N. slope, to cor.  
4.80 Highway, bears NE. to Stewart Mt. dam and SW. to Mesa.  
Along E. side of dry wash, 30 lks. wide, course N.

Survey of Part(completion) of Subdivisions of T.2 N., R.7 E.

BOOK 3923

Chains

29.80 Cross wash, course N.10°E.  
36.90 Cross same wash, course NNW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for 1/4 sec. cor., with brass cap marked

1/4  
S10 | S11  
1930

from which  
An ironwood, 6 ins. diam., bears S.53 1/2°W., 38 lks. dist., marked 1/4 S10 BT.  
An ironwood, 6 ins. diam., bears North, 72 lks. dist., marked 1/4 S11 BT.

43.20 Desc. about 100 ft. over gradual N. slope.  
Wood road, bears SW. and NE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 2,3,10 and 11, with brass cap marked

T2N | R7E  
S3 | S2  
S10 | S11  
1930

from which  
A mesquite, 6 ins. diam., bears N.65 1/2°W., 44 lks. dist., marked T2N R7E S3 BT.  
Raise mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.  
Land: flat.  
Soil: sandy loam, 1st rate.  
Timber: none.  
Undergrowth: mesquite, ironwood, greasewood, cactus, catclaw, palo verde.

40.00 S.89°41'E., on random line, bet. secs. 2 and 11.  
Set temp. 1/4 sec. cor.

79.88 Fall 7 lks. S. of the cor. of secs. 1,2,11 and 12.  
Thence

5.00 N.89°44'W., on true line, bet. secs. 2 and 11.  
Over rolling land; through scattering undergrowth.  
Dry wash, 40 lks. wide, course N.

12.80 Asc. 41 ft. over general SE. slope.  
Spur, slopes NW.

15.50 Dry wash, 15 lks. wide, course N.

24.50 Dry wash, 30 lks. wide, course NW.

31.10 Wood road, bears N. and S.

34.00 Dry wash, 20 lks. wide, course NNW.

37.30 Dry wash, 50 lks. wide, course NNE.

39.94 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor., with brass cap marked

1/4 S2  
S11  
1930

from which  
A palo verde, 3 ins. diam., bears S.33°E., 14 lks. dist., marked 1/4 S11 BT.  
Raise mound of stone, 3 ft. base, 3 ft. high, N. of cor.

## Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.

Chains

- Desc. 25 ft. over W. slope.  
 41.80 Dry wash, 30 lks. wide, course N.  
 Asc. 23 ft. over E. slope.  
 43.60 Wood road, bears N. and SW.  
 52.10 Dry wash, 20 lks. wide, course N.  
 52.60 Highway drain ditch, course NE.  
 54.50 Highway, bears N.13°E. and S.13°W.  
 57.00 Dry wash, 20 lks. wide, course N.  
 65.90 Old unused road, bears NNE. and SSW.  
 68.50 Dry wash, 25 lks. wide, course N.  
 74.80 Dry wash, 10 lks. wide, course N.  
 79.20 Dry wash, 15 lks. wide, course N.  
 79.88 The cor. of secs. 2, 3, 10 and 11.  
 Land: rolling.  
 Soil: sandy loam, 1st and 2nd rates.  
 Timber: none.  
 Undergrowth: palo verde, mesquite, catclaw, greasewood,  
 cactus, ironwood.
- 
- N.0°09'W., on random line, bet. secs. 2 and 3.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 81.59 Intersect the cor. of secs. 2 and 3, only, on the N. bdy.  
 of the Tp. hereinbefore described.  
 Thence  
 S.0°09'E., on true line, bet. secs. 2 and 3.  
 Over flat; through scattering undergrowth.  
 0.90 Secondary road, bears NW. and SE.  
 3.40 Secondary road, bears NW. and SE.  
 13.60 Dry wash, 10 lks. wide, course NW.  
 16.40 Secondary road, bears E. and W.  
 28.50 Secondary road, bears E. and W.  
 37.60 Dry wash, 10 lks. wide, course NE.  
 41.59 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked  

$$\begin{array}{c} \frac{1}{4} \\ \uparrow \\ S3 \mid S2 \\ 1930 \end{array}$$
 Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
 47.00 Dry wash, 15 lks. wide, course NW.  
 51.30 Same wash, course NE.  
 54.80 Same wash, course NW.  
 57.30 Secondary road, bears WSW and ENE.  
 57.50 Power line, bears S.73 $\frac{1}{2}$ °W. and N.73 $\frac{1}{2}$ °E.  
 58.65 Telephone line, parallels power line.  
 81.59 The cor. of secs. 2, 3, 10 and 11.  
 Land: flat.  
 Soil: sandy loam, 1st rate.  
 Timber: none.  
 Undergrowth: palo verde, greasewood, mesquite, catclaw,  
 cactus.
- 
- From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of  
 the Tp., which is an iron post, 2 ins. diam., projecting  
 8 ins. above a mound of stone, firmly set, properly  
 marked on brass cap, dated 1921,  
 N.0°02'W., on true line, bet. secs. 33 and 34.  
 Over rolling land; through scattering undergrowth.  
 16.60 Dry wash, 120 lks. wide, 4 ft. deep, course SW.



Survey of Part(completion) of Subdivisions of T.2 N., R.7 E.

BOOK 3923

Chains

- 26.70 Dry wash, 50 lks. wide, 2 ft. deep, course SW.
- 37.90 Foot of hill; asc. 57 ft. over rocky SW. slope.
- 40.00 Set an iron post, 3 ft. long; 1 in. diam., 20 ins. in the ground, supported by a mound of stone, for  $\frac{1}{4}$  sec. cor. with brass cap marked

$\frac{1}{4}$   
 S33 | S34  
 1930

Raise mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Asc. 61 ft. over SW. slope.

- 44.05 Short spur, slopes NW.  
Desc. 85 ft. over NE. slope.

- 47.40 Foot of hill; over flat;  
Asc. 105 ft. over general S. slope, to cor.

- 47.60 Dry wash, 20 lks. wide, course SW.
- 48.80 Dry wash, 30 lks. wide, course SW.

- 66.10 Wood road, bears E. and W.

- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 27, 28, 33 and 34, with brass cap marked

T2N | R7E  
 S28 | S27  
 S33 | S34  
 1930

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land: flat and rolling.

Soil: loam, 1st rate.

Timber: none.

Undergrowth: palo verde, mesquite, cactus, catclaw, greasewood.

S. 89° 44' E., on random line, bet. secs. 27 and 34.

- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.

- 80.00 Fall 2 lks. N. of the true point for cor. of secs. 26, 27, 34 and 35.

Thence

N. 89° 43' W., on true line, bet. secs. 27 and 34.

Over gently rolling land; through scattering undergrowth.

- 0.30 Leave dry wash, course SW.
- 2.40 Dry wash, 20 lks. wide, course SSW.
- 5.90 Dry wash, 80 lks. wide, course S.
- 10.70 Dry wash, 20 lks. wide, course S.
- 14.90 Small dry wash, course SW.
- 15.20 Wood road, bears NW. and SE.
- 20.40 Dry wash, 20 lks. wide, course SSE.
- 21.50 Dry wash, 30 lks. wide, course SW. Road, unused, bears NW. and SE.
- 25.40 Dry wash, 15 lks. wide, course S.
- 30.30 Dry wash, 40 lks. wide, course S.
- 36.20 Wood road, bears N. and S.

- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$  S27  
 $\frac{1}{4}$  S34  
 1930

## Survey of Part(completion) of Subdivisions of T.2 N., R.7 E.

## Chains

Raise mound of stone, 3 ft. base, 3 ft. high, N. of cor.

- 40.30 Small dry wash, course SE.  
 42.20 Highway, bears N. 30° E. and S. 50° W. to Mesa.  
 45.00 Dry wash, 8 lks. wide, course S.  
 59.40 Wood road, bears NE. and SW.  
 61.60 Dry wash, 20 lks. wide, course SE.

80.00 The cor. of secs. 27, 28, 33 and 34.

Land: gently rolling.

Soil: loam, 1st rate.

Timber: none.

Undergrowth: palo verde, cactus, mesquite, greasewood, catclaw.

N. 0° 02' W., on true line, bet. secs. 27 and 28.

Over rolling land; through scattering undergrowth.

Asc. about 100 ft. over general S. slope, to  $\frac{1}{4}$  sec. cor.

- 0.70 Dry wash, 30 lks. wide, course SW.  
 37.10 Dry wash, 40 lks. wide, course SE.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

S28 | S27  
 1930

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

- 54.20 Ravine, course SE.  
 63.80 Ravine, course SE.  
 Asc. 170 ft. over SW. slope, to cor.  
 74.07 Boulder, 15 ft. high, on line.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 21, 22, 27 and 28, with brass cap marked

T2N | R7E  
 S21 | S22  
 S28 | S27  
 1930

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land: rolling.

Soil: loam, adobe, 2nd rate.

Timber: none.

Undergrowth: palo verde, mesquite, greasewood, cactus, catclaw.

- 40.00 S. 89° 43' E., on random line, bet. secs. 22 and 27.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.92 Fall 2 lks. N. of the cor. of secs. 22, 23, 26 and 27.  
 Thence  
 N. 89° 42' W., on true line, bet. secs. 22 and 27.  
 Over rolling land; through scattering undergrowth.  
 Desc. 18 ft. over SW. slope.  
 7.90 Highway, bears N. to Stewart Mt. dam and S. to Mesa.  
 Asc. 86 ft. over NE. slope.

Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.

Chains

31.70 Spur, slopes SE. Desc. 91 ft. over SW. slope.

35.10 Ravine, course SE. Asc. 91 ft. over NE. slope.

39.96 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$  S22  
 S27  
 1930

Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Over mountainous land.  
 Asc. 123 ft. over NE. slope.

45.00 Spur, slopes SE.  
 Desc. 31 ft. over SW. slope.

51.50 Ravine, course SE.  
 Asc. 356 ft. over NE. slope.

66.40 Ridge, bears SE. and NW.  
 Desc. 372 ft. over SW. slope.

79.92 The cor. of secs. 21, 22, 27 and 28.

Land: rolling and mountainous.  
 Soil: loam, 1st and 3rd rates.  
 Timber: none.  
 Undergrowth: palo verde, greasewood, cactus, catclaw, mesquite.

---

N.0°02'W., on true line, bet. secs. 21 and 22.  
 Over mountainous land; through scattering undergrowth,  
 Asc. 121 ft. over SW. slope.

6.80 Slope changes; along W. slope.

11.50 Spur, slopes W.  
 Desc. 46 ft. over NW. slope.

14.60 Ravine, course SW.  
 Asc. 136 ft. over SW. slope.

21.00 Ridge, bears E. and W. Hill bears 5 chs. W.  
 Desc. 204 ft. over NNE. slope.

32.70 Ravine, course NE.  
 Over broken E. slope.

38.30 Draw, course E.  
 Asc. 7 ft. over SE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
 S21 | S22  
 1930

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Asc. 17 ft. over SE. slope.

43.10 Low spur, slopes SE.

44.70 Short spur, slopes NE.  
 Desc. 19 ft. over N. slope.

49.20 Draw, course SE.  
 Asc. 103 ft. over SE. slope.

57.90 Drain, course SE.

62.10 Round hill on spur, slopes NE.

62.19 U.S.G.S. Triangulation point bears S.48°33'W.

65.30 Spur, slopes NE.  
 Desc. 209 ft. over NW. slope, to 74.00 chs.

## Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.

Chains

- 71.60 Spur, slopes NW.  
 74.00 Ravine, course NW.  
     Asc. 11 ft. over SW. slope.  
 75.80 Spur, slopes NW.  
 79.90 Spur, slopes NW.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground, with stone, 8 x 5 x 4 ins., marked with cross (x) deposited beside, for cor. of secs. 15, 16, 21 and 22, with brass cap marked

|     |     |
|-----|-----|
| T2N | R7E |
| S16 | S15 |
| S21 | S22 |

1930

Raise mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, around post.

Land: mountainous.

Soil: rocky, 3rd rate.

Timber: none.

Undergrowth: palo verde, mesquite, catclaw, cactus, greasewood.

- S.  $89^{\circ}42'E.$ , on random line, bet. secs. 15 and 22.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.02 Fall 7 lks. N. of the cor. of secs. 14, 15, 22 and 23.  
 Thence  
 N.  $89^{\circ}39'W.$ , on true line, bet. secs. 15 and 22.  
 Over rolling land; through scattering undergrowth.  
 7.00 Dry wash, 10 lks. wide, course NW.  
 11.40 Highway, bears NNW. to Stewart Mt. dam and SSE. to Mesa.  
 15.00 Dry wash, 100 lks. wide, course NW.  
 24.20 Dry wash, 20 lks. wide, course NNE.  
 30.90 Dry wash, 35 lks. wide, course NNE.  
 35.40 Small ravine, course N.  
 40.01 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground, with stone, marked with cross (x) deposited at base, for  $\frac{1}{4}$  sec. cor., with brass cap marked

|                   |
|-------------------|
| $\frac{1}{4}$ S15 |
| $\frac{1}{4}$ S22 |

1930

Raise mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, around post.

- 41.50 Ravine, course NE.  
 45.50 Dry wash, 70 lks. wide, course NE.  
 50.70 Dry wash, 30 lks. wide, course NE.  
 57.90 Dry wash, 50 lks. wide, course NE.  
     Asc. 91 ft. over NE. slope.  
 65.50 Ravine, course NE.  
     Asc. 276 ft. over E. slope.  
 73.50 Rocky spur, slopes NE.  
 73.60 U.S.G.S. Triangulation point bears S.  $40^{\circ}41'W.$   
     Desc. 217 ft. over NW. slope.  
 80.02 The cor. of secs. 15, 16, 21 and 22.

Land: rolling.

Soil: loam, 1st and 3rd rates.

Timber: none.

Undergrowth: palo verde, greasewood, cactus, catclaw.

Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.

BOOK 3923

Chains

- N.0°02'W., on true line, bet. secs. 15 and 16.
- Over rolling land; through scattering undergrowth.
- Desc. 25 ft. over NW. slope.
- 1.95 Ravine, course W., 5 chs. to junction with wash, course N.
- Continue descent 83 ft. over NW. slope.
- 10.20 Ravine, course NW. Desc. 30 ft.
- 12.10 Spur, slopes NW. Desc. 32 ft.
- 15.50 Spur, slopes W. Desc. 30 ft. over N. slope.
- 16.70 Ravine, course NW. Asc. 10 ft., then desc. 60 ft., W. slope.
- 22.90 Spur, slopes NW. Asc. 17 ft.
- 33.90 Spur, slopes NW.
- Desc. 104 ft. over rolling N. slope.
- 39.75 Small ravine, course NE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground, with stone, 8 x 5 x 3 ins., marked with cross (x) deposited at base, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
 S16|S15  
 1930

Raise mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high, around post.

- Desc. 80 ft. over N. slope.
- 46.40 Dry wash, 20 lks. wide, course NE.
- Asc. 20 ft. over SE. slope.
- 49.20 Spur, slopes NE.
- Desc. 42 ft. over NE. slope.
- 50.80 Small ravine, course NE.
- Asc. 17 ft. over SE. slope.
- 53.50 Spur, slopes NE.
- Desc. 46 ft. over NW. slope.
- 57.10 Dry wash, 20 lks. wide, course NE.
- Asc. 23 ft.
- 58.50 Spur, slopes NE.
- Desc. 46 ft.
- 77.60 Dry wash, 40 lks. wide, course NE. 1 ch. to junction with wash, course NW. Over flat.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 9, 10, 15 and 16, with brass cap marked

T2N|R7E  
 S9|S10  
 S16|S15  
 1930

- from which
- A palo verde, 3 ins. diam., bears N.87°E., 26 lks. dist., marked BT.
- A mesquite, 12 ins. diam., bears S.29 $\frac{1}{2}$ °E., 42 lks. dist., marked T2N R7E S15 BT.
- A palo verde, 10 ins. diam., bears S.53 $\frac{1}{2}$ °W., 185 lks. dist., marked T2N R7E S16 BT.
- A catclaw, 3 ins. diam., bears N.48 $\frac{1}{2}$ °W., 66 lks. dist., marked T2N R7E S9 BT.

Land: rolling.  
 Soil: adobe loam, 3rd rate.  
 Timber: none.  
 Undergrowth: palo verde, greasewood, mesquite, catclaw, cactus, sotol.

## Survey of Part(completion) of Subdivisions of T.2 N., R.7 E.

| Chains |                                                                                                                      |
|--------|----------------------------------------------------------------------------------------------------------------------|
|        | S. 89°39'E., on random line, bet. secs. 10 and 15.                                                                   |
| 40.00  | Set temp. $\frac{1}{4}$ sec. cor.                                                                                    |
| 79.96  | Intersect cor. of secs. 10, 11, 14 and 15.                                                                           |
|        | Thence                                                                                                               |
|        | N. 89°39'W., on true line, bet. secs. 10 and 15.                                                                     |
|        | Over flat; through moderate undergrowth.                                                                             |
| 2.00   | Highway, bears about N. 10°E. and S. 10°W. to Mesa.                                                                  |
| 6.10   | Dry wash, 100 lks. wide, splits, courses NE. and NNW.                                                                |
| 11.60  | Dry wash, 50 lks. wide, course N.                                                                                    |
| 12.70  | Old road, bears N. 25°W. and S. 25°E.                                                                                |
| 15.90  | Dry wash, 140 lks. wide, course NW.                                                                                  |
| 20.80  | Dry wash, 20 lks. wide, course NW.                                                                                   |
| 23.80  | Dry wash, 30 lks. wide, course NW.                                                                                   |
| 27.60  | Dry wash, 30 lks. wide, course NE.                                                                                   |
| 29.60  | Dry wash, 10 lks. wide, course NW.                                                                                   |
| 29.80  | Old road, bears NW. and SE.                                                                                          |
| 32.90  | Dry wash, 15 lks. wide, course NW.                                                                                   |
| 39.98  | Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked |
|        | $\frac{1}{4} \begin{array}{l} S10 \\ S15 \\ 1930 \end{array}$                                                        |
|        | Raise mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.                                                |
| 40.30  | Dry wash, 15 lks. wide, course NW.                                                                                   |
| 48.00  | Dry wash, 20 lks. wide, course NW.                                                                                   |
| 53.90  | Dry wash, 10 lks. wide, course NW.                                                                                   |
| 58.10  | Dry wash, 35 lks. wide, course NW.                                                                                   |
| 63.00  | Dry wash, 30 lks. wide, course NW.                                                                                   |
| 64.40  | Dry wash, 20 lks. wide, course NW.                                                                                   |
| 70.70  | Dry wash, 20 lks. wide, course NW.                                                                                   |
| 79.40  | Dry wash, 70 lks. wide, course NW.                                                                                   |
| 79.96  | The cor. of secs. 9, 10, 15 and 16.                                                                                  |
|        | Land: flat.                                                                                                          |
|        | Soil: sandy loam, 1st rate.                                                                                          |
|        | Timber: none.                                                                                                        |
|        | Undergrowth: palo verde, mesquite, greasewood, cactus, catclaw, ironwood.                                            |
| -----  |                                                                                                                      |
|        | N. 0°02'W., on true line, bet. secs. 9 and 10.                                                                       |
|        | Over flat; through moderate undergrowth.                                                                             |
| 1.00   | Dry wash, 50 lks. wide, course N. 30°W.                                                                              |
| 17.00  | Same wash, 40 lks. wide, course NNE.                                                                                 |
| 40.00  | Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked |
|        | $\frac{1}{4} \begin{array}{l} S9 \\ S10 \\ 1930 \end{array}$                                                         |
|        | from which                                                                                                           |
|        | A palo verde, 8 ins. diam., bears S. 32 $\frac{1}{4}$ °E., 14 lks. dist., marked $\frac{1}{4}$ S10 BT.               |
|        | A palo verde, 8 ins. diam., bears S. 49°W., 68 lks. dist., marked $\frac{1}{4}$ S9 BT.                               |
| 47.00  | Dry wash, 30 lks. wide, course NW.                                                                                   |

Chains

78.58 Telephone line, parallels power line.  
79.58 Power line, bears S.73°36'W. and N.73°36'E.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 3,4,9 and 10, with bras cap marked

T2N | R7E  
S4 | S3  
-----  
S9 | S10  
1930

Raise mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Land: flat.

Soil: loam, 1st rate.

Timber: none.

Undergrowth: palo verde, mesquite, catclaw, greasewood, ironwood.

40.00 S.89°39'E., on random line, bet. secs. 3 and 10.  
Set temp. 1/4 sec. cor.

80.00 Intersect the cor. of secs. 2,3,10 and 11.  
Thence

N.89°39'W., on true line, bet. secs. 3 and 10.

Over flat; through moderate undergrowth.

15.00 Old road, bears N. and S.

16.20 Dry wash, 20 lks. wide, course N.

22.60 Dry wash, 20 lks. wide, course N.20°W.

32.90 Dry wash, 30 lks. wide, course N.

33.90 Dry wash, 5 lks. wide, course NNW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for 1/4 sec. cor., with brass cap marked

1/4 S3  
-----  
S10  
1930

Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.

43.00 Old road, bears N. and S.

50.70 Dry wash, 20 lks. wide, course N.

53.85 Dry wash, 15 lks. wide, course NW.

59.25 Dry wash, 10 lks. wide, course N.

61.10 Leave flat; asc. 30 ft. over E. slope.

65.50 Spur, slopes N. Desc. 36 ft. over NW. slope.

67.25 Secondary road, bears NE. and SW.

68.20 Dry wash, 15 lks. wide, course N. Over flat.

75.15 Telephone line, parallels power line.

75.60 Secondary road, bears N. and S.

78.70 Power line, bears N.73 1/2°E. and S.73 1/2°W.

80.00 The cor. of secs. 3,4,9 and 10.

Land: flat and rolling.

Soil: adobe loam, 1st rate.

Timber: none.

Undergrowth: palo verde, mesquite, catclaw, cactus, greasewood, ironwood, sotol.

## Survey of Part(completion) of Subdivisions of T.2 N., R.7 E.

- Chains
- N.0°09'W., on random line, bet. secs. 3 and 4.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 81.20 Fall 16 lks. W. of the cor. of secs. 3 and 4, only, on the N. bdy. of the Tp. hereinbefore described.  
 Thence  
 S.0°02'E., on true line, bet. secs. 3 and 4.  
 Over flat; through dense undergrowth.  
 0.25 Secondary road, bears NW. and SE.  
 3.00 Secondary road, bears SW. and NE.  
 5.20 House bears about 2 chs. W.  
 4.30 Graveyard, 5 graves, bears 2 chs. E.  
 7.60 Secondary road, bears NW. and SE.  
 10.20 Fence, bears SE. and NW; gate 10 lks. E.  
 16.90 Fence, bears E. and W.  
 19.90 Apiary, on line. Through moderate undergrowth.  
 28.90 Road, bears NE. and SW.  
 36.90 Road, bears NE. and SW.  
 41.20 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
 S4 | S3  
 1930

from which

- A mesquite, 12 ins. diam., bears S.63°E., 21 lks. dist., marked  $\frac{1}{4}$  S3 BT.  
 A mesquite, 8 ins. diam., bears S.32 $\frac{1}{2}$ °W., 43 lks. dist., marked  $\frac{1}{4}$  S4 BT.

- 53.30 Secondary road, bears SW. and NE.  
 56.50 Secondary road, bears SW. and NE.  
 61.70 Dry wash, 60 lks. wide, course NW.  
 65.90 Dry wash, 10 lks. wide, course NW.  
 72.10 Secondary road, bears NW. and SE.  
 73.20 Dry wash, 10 lks. wide, course NW.

- 81.20 The cor. of secs. 3, 4, 9 and 10.

Land: flat.  
 Soil: sandy loam, 1st rate.  
 Timber: none.  
 Undergrowth: mesquite, cactus, catclaw, greasewood, ironwood, palo verde.

-----  
 From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp., which is an iron post, 2 ins. diam., projecting 8 ins. above ground, properly marked on brass cap, dated 1921, witnessed by pits,

- N.0°02'W., on true line, bet. secs. 32 and 33.  
 Over flat; through moderate undergrowth.  
 0.00 House, about 10 x 14 ft., bears N.50°E., about 2 chs.  
 House, about 15 x 25 ft., bears N.57 $\frac{1}{2}$ °W., about 5 chs.  
 2.50 Road, bears E. and W.  
 17.90 Dry wash, 8 lks. wide, course SW.  
 25.46 Secondary road, bears E. and W.  
 28.70 Dry wash, 40 lks. wide, course SW.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
 S32 | S33  
 1930



Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.

BOOK 3923

Chains

from which  
 A palo verde, 8 ins. diam., bears N.17 $\frac{1}{2}$ °E., 77 lks. dist., marked  $\frac{1}{4}$  S33 BT.  
 An ironwood, 6 ins. diam., bears S.10°W., 172 lks. dist., marked  $\frac{1}{4}$  S32 BT.

- 40.33 Dry wash, 15 lks. wide, course W.
- 42.60 Dry wash, 25 lks. wide, course W.
- 45.90 Secondary road, bears SE. and NW.
- 50.15 Dry wash, 40 lks. wide, course SW.
- 63.00 Dry wash, 20 lks. wide, course SW.
- 70.00 Dry wash, 10 lks. wide, course SW.
- 74.70 Dry wash, 40 lks. wide, course SW.
- 76.20 Dry wash, 15 lks. wide, course SW.

80.00-Set an iron post, 3 ft.-long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 28, 29, 32 and 33, with brass cap marked

|      |     |
|------|-----|
| T2N  | R7E |
| S29  | S28 |
| S32  | S33 |
| 1930 |     |

from which  
 An ironwood, 4 ins. diam., bears N.29 $\frac{1}{2}$ °E., 162 lks. dist., marked T2N-R7E S28 BT.  
 An ironwood, 4 ins. diam., bears S.42°E., 32 lks. dist., marked T2N R7E S33 BT.  
 An ironwood, 6 ins. diam., bears S.39°W., 109 lks. dist., marked T2N R7E S32 BT.  
 A palo verde, 4 ins. diam., bears N.47°W., 24 lks. dist., marked T2N R7E S29 BT.

Land: flat.  
 Soil: adobe loam, 1st rate.  
 Timber: none.  
 Undergrowth: palo verde, ironwood, catclaw, cactus, greasewood, mesquite.

- 
- 40.00 S.89°44'E., on random line, bet. secs. 28 and 33.
  - Set temp.  $\frac{1}{4}$  sec. cor.
  - 80.00 Fall 4 lks. N. of the cor. of secs. 27, 28, 33 and 34.
  - Thence
  - N.89°42'W., on true line, bet. secs. 28 and 33.
  - Over flat; through scattering undergrowth.
  - 1.00 Dry wash, 10 lks. wide, course S.
  - 4.30 Wood road, bears N. and S.
  - 12.30 Dry wash, 25 lks. wide, course SW., made up of washes from NE., N., and NW.
  - Over rolling land; Asc. 97 ft. over SE. slope.
  - 19.50 Over top of hill.
  - 21.50 Desc. 147 ft. over SW. slope.
  - 30.80 Enter dry wash, course SW.
  - 32.60 Leave same.
  - 36.70 Draw, 30 lks. wide, 10 ft. deep, course S.
  - 40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, supported by a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked

|      |
|------|
| S28  |
| S33  |
| 1930 |

Raise mound of stone, 3 ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.

## Survey of Part (Completion) of Subdivisions of T. 2 N., R. 7 E).

Chains

- 42.20 Dry wash, 20 lks. wide, course SW.  
 45.70 Dry wash, 30 lks. wide, course SW.  
 47.00 Dry wash, 50 lks. wide, course SW.  
 61.00 Small ravine, course SW.  
 75.60 Small ravine, 30 lks. wide, 8 ft. deep, course SW.  
 78.80 Dry wash, 15 lks. wide, course SW.

80.00 The cor. of secs. 28, 29, 32 and 33.

Land: flat and rolling.

Soil: loam, 2nd rate.

Timber: none.

Undergrowth: palo verde, greasewood, catclaw, cactus,  
mesquite, ironwood.

N.0°02'W., on true line, bet. secs. 28 and 29.

Over rolling land; through scattering undergrowth.

- 8.20 Small ravine, 15 lks. wide, 10 ft. deep, course SW.  
 14.10 Draw, 20 lks. wide, 15 ft. deep, course SW.  
 19.40 Wood road, bears NE. and SW.  
 35.60 Draw, 30 lks. wide, 10 ft. deep, course SW.  
 37.70 Draw, 20 lks. wide, course W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked $\frac{1}{4}$ 

S29|S28

1930

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Desc. 25 ft. along W. slope.

44.50 Small ravine, course SW.

Asc. 71 ft. over SW. slope.

65.40 Dry wash, 90 lks. wide, course SW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 22 ins. in  
the ground, supported by a mound of stone, for cor.  
of secs. 20, 21, 28 and 29, with brass cap marked

T2N|R7E

S20|S21

S29|S28

1930

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land: rolling.

Soil: adobe loam, 2nd rate.

Timber: none.

Undergrowth: palo verde, mesquite, ironwood, cactus,  
greasewood, catclaw.

S.89°42'E., on random line, bet. secs. 21 and 28.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.79.82 Fall 9 lks. S. of the cor. of secs. 21, 22, 27 and 28.  
Thence

N.89°46'W., on true line, bet. secs. 21 and 28.

Over rolling and mountainous land; through scattering  
undergrowth.

Desc. 96 ft. along S. slope, to 10.10 chs.

5.10 Drain, 20 lks. wide, course SSE.

Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.

BOOK 3928

Chains

- 7.10 Drain, 20 lks. wide, course S.
- 10.10 Dry wash, 20 lks. wide, course SE.
- 13.00 Dry wash, 30 lks. wide, course SE.
- 16.00 Drain, 20 lks. wide, course SE.
- 18.70 Ravine, 25 ft. deep, course SE.
- 20.60 Low spur, slopes SE.  
Desc. 28 ft. over SE. slope.
- 27.80 Ravine, course SE.  
Asc. 185 ft. over SE. slope.
- 34.90 Spur, slopes SE. Desc. 157 ft. over NW. slope.
- 39.91 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$ S21  
S28  
1930

Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.

- Desc. 171 ft. over NW. slope.
- 46.60 Ravine, course SW.  
Asc. 11 ft.
- 47.80 Rock point, projects SE.  
Desc. 183 ft. over general SW. slope.
- 62.00 Ravine, course SW.  
Asc. 42 ft. over SE. slope.
- 66.10 Spur, slopes S.
- 66.90 Drain, course SW.  
Continue descent 46 ft. over general SW. slope.
- 77.30 Drain, course SW.
- 79.82 The cor. of secs. 20, 21, 28 and 29.

Land: rolling and mountainous.  
Soil: rocky loam, 2nd and 3rd rates.  
Timber: none.  
Undergrowth: palo verde, mesquite, catclaw, cactus, greasewood, mesquite.

N.0°02'W., on true line, bet. secs. 20 and 21.  
Over mountainous land; through scattering undergrowth.  
Asc. 40 ft. over SW. slope.

- 2.50 Rocky spur, slopes SW. Along W. slope.
- 4.80 Drain, course SW.
- 7.50 Short spur, slopes SW.
- 12.00 Asc. 255 ft. over SW. slope.
- 24.90 Ridge, bears SW. and E.  
Desc. 80 ft. over NW. slope.
- 28.60 Ravine, course W.  
Asc. 34 ft. over SW. slope.
- 29.80 Spur, slopes SW.  
Desc. 34 ft. over NW. slope.
- 37.90 Ravine, course N.70°W.  
Asc. 15 ft. over SW. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground, with stone, 8 x 6 x 6 ins., marked with cross (x) deposited at base, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
S20 | S21  
1930

Raise mound of stone, 3 ft. base, 1 $\frac{1}{4}$  ft. high, around post.

- 41.00 Spur, slopes N. Desc. 93 ft. over N. slope.

Chains

- 46.50 Rocky wash, 50 lks. wide, course W.  
Asc. 22 ft. over SW. slope.
- 50.00 Short spur, slopes W.  
Desc. 14 ft. over NW. slope.
- 51.60 Rocky wash, 20 lks. wide, course W.  
Asc. 229 ft. over rocky SW. slope.
- 61.80 Ridge, bears E. and W.  
Desc. 303 ft. over NNE. slope, to 74.80 chs.; then NW.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground, with stone, 4 x 4 x 3 ins., deposited at base, for cor. of secs. 16, 17, 20 and 21, with brass cap marked

|      |     |
|------|-----|
| T2N  | R7E |
| S17  | S16 |
| S20  | S21 |
| 1930 |     |

Raise mound of stone, 3 ft. base, 1½ ft. high, around post.

Land: mountainous.

Soil: rocky, 3rd rate.

Timber: none.

Undergrowth: palo verde, mesquite, greasewood, cactus, catclaw.

- S. 89° 46' E., on random line, bet. secs. 16 and 21.
- 40.00 Set temp. ¼ sec. cor.
- 79.92 Fall 9 lks. S. of the cor. of secs. 15, 16, 21 and 22.  
Thence
- N. 89° 50' W., on true line, bet. secs. 16 and 21.  
Over mountainous land; through scattering undergrowth.  
Desc. 80 ft. over W. slope.
- 4.40 Ravine, course N. 25° W.  
Asc. 27 ft. over NE. slope.
- 7.70 Spur, slopes NW.  
Desc. 25 ft. over W. slope.
- 8.50 Ravine, course N.  
Asc. 214 ft. over NE. slope.
- 17.20 Spur, slopes N.  
Over gentle NW. slope.
- 20.70 Long spur, slopes NW.  
Desc. 300 ft. over general W. slope, to cor.
- 28.60 Ravine, course SW.
- 30.60 Short spur, slopes SW.
- 35.50 Drain, course NW.
- 38.90 Low spur, slopes N.
- 39.96 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor., with brass cap marked

|       |
|-------|
| ¼ S16 |
| ¼ S21 |
| 1930  |

Raise mound of stone, 3 ft. base, 3 ft. high, N. of cor.

- 40.50 Draw, 50 lks. wide, course N.
- 41.90 Draw, 50 lks. wide, course NNE.  
Asc. 350 ft. over SE. slope.
- 57.50 Spur, slopes NE.  
Desc. 35 ft. along N. slope.
- 60.00 Spur, slopes NW.  
Desc. 273 ft. over W. slope.
- 72.40 Small ravine, course NW.

Chains  
 76.10 Over gentle NE. slope.  
 Spur, slopes NW.  
 Desc. 71 ft. over NW. slope.  
 79.00 Drain, course NW.  
 79.92 The cor. of secs. 16, 17, 20 and 21.  
 Land: mountainous.  
 Soil: rocky, 3rd rate.  
 Timber: none.  
 Undergrowth: palo verde, mesquite, greasewood, cactus,  
 catclaw.

-----  
 N.0°02'W., on true line, bet. secs. 16 and 17.  
 Over rolling land; through scattering undergrowth.  
 Desc. 26 ft. over N. slope.  
 0.60 Ravine, course NW.  
 Desc. 156 ft. over NW. slope.  
 9.00 Draw, course NW.  
 Asc. 10 ft. over SW. slope.  
 14.30 Spur, slopes W.  
 Desc. 47 ft. over NW. slope.  
 16.10 Rocky wash, course W.  
 Asc. 47 ft. over S. slope.  
 18.40 Spur, slopes W.  
 23.40 Ravine, course W.  
 Asc. 24 ft. over SW. slope.  
 27.40 Spur, slopes NW.  
 Desc. 55 ft. over gentle NW. slope.  
 31.70 Small ravine, course W.  
 Asc. 27 ft. over SW. slope.  
 36.05 Spur, slopes W.  
 Desc. 28 ft. over NW. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the  
 ground, for 1/4 sec. cor., with brass cap marked

1/4  
 S17|S16  
 1930

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Over gentle NW. slope.  
 44.90 Spur, slopes NW. Over gentle NE. slope.  
 46.00 Small ravine, course N.5°W.  
 47.90 Same ravine, course NE.  
 56.00 Same ravine, course NW.  
 57.70 Spur, slopes NW.  
 Desc. 45 ft. over NE. slope.  
 61.30 Dry wash, 15 lks. wide, course NW.  
 64.70 Dry wash, 10 lks. wide, course NW.  
 68.10 Spur, slopes NW.  
 71.00 Dry wash, 20 lks. wide, course W.  
 74.80 Dry wash, 10 lks. wide, course SW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in  
 the ground, for cor. of secs. 8, 9, 16 and 17, with  
 brass cap marked

T2N|R7E  
 S8|S9  
 S17|S16  
 1930

## Chains

Raise mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Land: rolling.

Soil: gravel loam, 2nd rate.

Timber: none.

Undergrowth: palo verde, catclaw, cactus, greasewood, mesquite, ironwood.

- S. 89° 50' E., on random line, bet. secs. 9 and 16.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.00 Fall 16 lks. N. of the cor. of secs. 9, 10, 15 and 16.  
 Thence  
 N. 89° 43' W., on true line, bet. secs. 9 and 16.  
 Over flat; through scattering undergrowth.  
 7.50 Dry wash, 15 lks. wide, course NNW.  
 20.70 Dry wash, 20 lks. wide, course NW. for 4 chs.; thence N.  
 23.20 Dry wash, 40 lks. wide, course N.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$$\begin{array}{r} \frac{1}{4} \text{ S9} \\ \hline \text{S16} \\ 1930 \end{array}$$

Raise mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.

Over rolling land.

- 42.40 N. edge of wash from SE., course W.  
 49.40 Same dry wash, 60 lks. wide, course NW.  
 56.80 Short spur, slopes NW.  
 58.20 Dry wash, 15 lks. wide, course NW.  
 63.70 Dry wash, 20 lks. wide, course N. 70° W.  
 67.30 Dry wash, 20 lks. wide, course NW.  
 73.10 Dry wash, 30 lks. wide, course NW.  
 74.30 Spur, slopes NW.  
 78.00 Small ravine, course N. 75° W.  
 80.00 The cor. of secs. 8, 9, 16 and 17.

Land: flat and rolling.

Soil: gravel and loam, 1st rate.

Timber: none.

Undergrowth: palo verde, mesquite, catclaw, cactus, greasewood.

- N. 0° 02' W., on true line, on E. bdy. of sec. 8.  
 Over rolling land; through scattering undergrowth.  
 0.10 Small ravine, course NW.  
 1.50 Spur, slopes NW.  
 7.00 Dry wash, 30 lks. wide, course S. 75° W.  
 21.60 Dry wash, 5 lks. wide, course N. 75° W.  
 27.40 Dry wash, 20 lks. wide, course W.  
 32.70 Dry wash, 10 lks. wide, course NW.  
 35.60 Dry wash, 40 lks. wide, course NW.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground, supported by a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$$\begin{array}{r} \frac{1}{4} \\ \hline \text{S8} \text{ S9} \\ 1930 \end{array}$$

Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.

BOOK 3923

Chains

From which  
 A palo verde, 8 ins. diam., bears S.30 $\frac{1}{4}$ °E., 59 lks. dist., marked  $\frac{1}{4}$  S9 BT.  
 A palo verde, 6 ins. diam., bears S.87 $\frac{1}{2}$ °W., 170 lks. dist., marked  $\frac{1}{4}$  S8 BT.

Over flat, slopes N.

- 43.50 Dry wash, 15 lks. wide, course NW.
- 57.90 Trail, bears S.65°W. and N.65°E.
- 63.83 Telephone line, parallels power line.
- 64.92 Power line, bears N.82°57'W. and S.82°57'E.
- 65.61 Secondary road, bears E. and W.
- 67.20 Dry wash, 10 lks. wide, course NW.
- 69.90 Dry wash, 40 lks. wide, course W.
- 72.40 Dry wash, 15 lks. wide, course W. Asc. S. slope.
  
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground, with stone, 9 x 7 x 5 ins., marked with cross (X), deposited beside, and in a mound of stone to top, for cor. of secs. 4 and 9, only, with brass cap marked

T2N R7E  
 S8 | S4  
 S9  
 1930

- 80.77 Intersect the S. bdy. of sec. 5 at a point 5.00 chs. N.89°51'W. from the SE. cor. of said sec.  
 At point of intersection  
 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground, with a stone, 8 x 6 x 6 ins., marked with cross (X), deposited beside, and in a mound of stone to top, for cor. of secs. 4 and 8, only, with brass cap marked

T2N R7E  
 S 5  
 S8 | S4  
 1930

Land: flat and rolling.  
 Soil: gravel and loam, 1st rate.  
 No timber.  
 Undergrowth: palo verde, mesquite, catclaw, cactus, greasewood.

- 
- From cor. of secs. 4 and 9, only,  
 S.89°43'E., on random line, bet. secs. 4 and 9.
  - 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
  - 79.90 Fall 2 lks. S. of the cor. of secs. 3,4,9 and 10.  
 Thence  
 N.89°44'W., on true line, bet. secs. 4 and 9.  
 Over gently rolling land; thru scattering undergrowth.
  - 14.90 Dry wash, 20 lks. wide, course N.
  - 20.60 Dry wash, 20 lks. wide, course N.
  - 25.50 Junction of dry washes from SE. and SW., course NE.
  - 35.70 Secondary road, bears NE. and SW.
  - 36.60 Dry wash, 20 lks. wide, course NE.
  
  - 39.95 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

S4  
 S9  
 1930

Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.

## Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.

Chains

51.10 Secondary road, bears NW. and SE.

79.90 The cor. of secs. 4 and 9, only.

Land: gently rolling.

Soil: adobe loam, 1st rate.

No timber.

Undergrowth: palo verde, greasewood, mesquite, cactus, catclaw.

-----

From the meander cor. of secs. 4 and 5 (2.00 chs. S.0°01'E. of the cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp.), which is an iron post, 1 in. diam., projecting 12 ins. above ground, firmly set, with properly-marked brass cap dated 1911, witnessed by a mound of stone N. of cor.,

S.0°01'E., on true line, on E. bdy. of sec. 5.

Over rolling land; thru dense undergrowth.

1.10 Old ditch, 10 lks. wide, bears NE. and SW. Over bottom land.

3.04 Bank, 10 ft. high, of slough, bears NE. and SW., dead, odorous water, 4 ft. deep.

6.62 Bank, 3 ft. high, of same; left bank of old channel of Salt River. At this point

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for meander cor., with brass cap marked

MC

S4

S5

T2N R7E

1932

Raise mound of stone, 2 ft. base, 1½ ft. high, S. of cor.

6.70 Over sandy bottom land, bears NE. and SW.

13.61 Right bank of right channel of Salt River, 6 ft. high; water, 2 ft. deep, runs W. At this point

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for meander cor., with brass cap marked

T2N R7E

S5/S4

MC

1932

Raise mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

15.20 Left bank of same channel, 5 ft. high. Point for meander cor. falls on insecure ground. Over small island covered with dense arrow-weed.

15.71 (51 lks. S.0°01'E. of true point; also 2.39 chs. N.0°01'W. of true point) Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for witness cor. to meander corners on N. and S. sides of island, with brass cap marked



Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.

BOOK 3928

Chains

MC  
 S5|S4  
 W C  
 T2N R7E  
 W C  
 S5|S4  
 MC  
 1932

Raise mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

18.10 Right bank of left channel of river, 5 ft. high; water, 3 ft. deep, runs W. True point for meander cor. falls on soft, insecure ground.

21.16 Left bank of left channel of Salt River. Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for meander cor., with brass cap marked

MC  
 S5|S4  
 T2N R7E  
 1932

Raise mound of stone, 3 ft. base, 2 ft. high, S. of cor.

21.30 Top of bank, 8 ft. high, bears E. and W. Over bottom land.

28.00 Secondary road, bears E. and W.

31.50 Foot of cliff, faces N.; remains of ditch flume on face.

32.80 Top of same, 140 ft. high. Thru scattering undergrowth.

33.00 Rocky point, projects NE. Desc. 30 ft. over SE. slope.

37.50 Hillside drain, course NE. Asc. 20 ft. over N. slope.

38.00 (40.00 chs. S. 0° 01' E.) Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, with stone, marked with cross (X) deposited beside, for ¼ sec. cor. of sec. 5, only, with brass cap marked

¼  
 S5|  
 1930

Raise mound of stone, 3 ft. base, 1 ft. high, around post.

Asc. 20 ft. over N. slope.

38.77 (40.00 chs. in Northing from the cor. of secs. 4 and 9, only) Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor. of sec. 4, only, with brass cap marked

¼  
 S4  
 1930

Raise mound of stone, 3 ft. base, 2 ft. high, E. of cor.

Asc. 105 ft. over N. slope.

44.80 Spur, slopes S. 60° E. Desc. 133 ft. over SW. slope.

57.40 Ravine, course NW. Asc. 74 ft. over NE. slope.

69.50 Spur, slopes SW. Desc. 102 ft. over SW. slope.

78.00 (80.00 chs. S. 0° 01' E.) Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground, with stone, 6 x 6 x 6 ins., marked with cross (X), deposited beside, supported by a mound of stone, for cor. of sec. 5, only, with

Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.

Chains

brass cap marked

T2N R7E

S5 | S4

1930

Raise mound of stone, 2 ft. base, 1 1/2 ft. high, NW. of cor.

Land: bottom and rolling.

Soil: gravel and loam, 2nd and 1st rates.

Timber: willow.

Undergrowth: palo verde, mesquite, arrow-weed, catclaw, cactus, greasewood.

From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., which is an iron post, 2 ins. diam., projecting 9 ins. above ground, firmly set, properly marked on brass cap, dated 1921, with remains of witness pits,

N.0°03'W., bet. secs. 31 and 32.

Over gently rolling land; thru moderate undergrowth.

- 9.30 Dry wash, 10 lks. wide, course SW.
- 15.00 Dry wash, 10 lks. wide, course W.
- 16.30 Secondary road, bears E. and W.
- 19.00 Dry wash, 10 lks. wide, course SW.
- 24.10 Dry wash, 10 lks. wide, course SW.
- 27.30 Dry wash, 10 lks. wide, course SW.
- 29.80 Secondary road, bears NE. and SW.
- 34.90 Dry wash, 10 lks. wide, course SW.
- 36.60 Dry wash, 15 lks. wide, course SW.
- 39.70 Dry wash, 10 lks. wide, course SW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor., with brass cap marked

S31 | S32

1930

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

- 46.80 Dry wash, 15 lks. wide, course SW.
- 56.50 Dry wash, 10 lks. wide, course SW.
- 57.00 Secondary road, bears SW. and NE.
- 61.80 Dry wash, 20 lks. wide, course SW.
- 63.20 Secondary road, bears SW. and NE.
- 66.10 Dry wash, 15 lks. wide, course SW.
- 68.90 Dry wash, 20 lks. wide, course W.
- 71.60 Secondary road, bears E. and W.
- 75.20 Dry wash, 25 lks. wide, course SW.
- 77.30 Dry wash, 15 lks. wide, course SW.
- 78.80 Secondary road, bears SE. and NW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 29, 30, 31 and 32, with brass cap marked

T2N R7E

S30 | S29

S31 | S32

1930

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land: gently rolling.

Soil: sandy, 1st rate.

Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.

BOOK 3923

Chains

No timber.  
Undergrowth: mesquite, palo verde, cactus, catclaw, greasewood.

- S.89°44'E., on random line, bet. secs. 29 and 32.
- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
- 80.02 Fall 4 lks. N. of the cor. of secs. 28, 29, 32 and 33. Thence
- N.89°42'W., on true line; bet. secs. 29 and 32.
- Over flat; thru moderate undergrowth.
- 10.60 Dry wash, 30 lks. wide, course SW.
- 16.80 Dry wash, 40 lks. wide, course SW.
- 18.50 Secondary road, bears NE. and SW.
- 18.70 Lime kiln, 6 ft. diam, on line.
- 20.30 Lime kiln, 6 ft. diam., bears 50 lks. S.
- 20.40 Small draw, course SW.
- 28.60 Dry wash, 20 lks. wide, course SW.
- 37.20 Secondary road, bears NE. and SW.

40.01 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$  S29  
 $\frac{1}{4}$  S32  
 1930

Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.

- 40.60 Center of dry wash, 90 lks. wide, course SW.
- 42.60 Dry wash, 10 lks. wide, course SW.
- 45.80 Secondary road, bears NE. and SW.
- 50.00 Dry wash, 10 lks. wide, course SW.
- 52.30 Secondary road, bears NE. and SW.
- 53.90 Dry wash, 25 lks. wide, course SW.
- 57.90 Dry wash, 15 lks. wide, course SW.
- 61.70 Dry wash, 10 lks. wide, course SW.
- 70.40 Dry wash, 10 lks. wide, course SW.
- 75.50 Dry wash, 10 lks. wide, course SW.

80.02 The cor. of secs. 29, 30, 31 and 32.

Land: gently rolling.  
Soil: loam, 2nd rate.  
No timber.  
Undergrowth: palo verde, mesquite, catclaw, cactus, greasewood.

- N.89°44'W., on random line, bet. secs. 30 and 31.
- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
- 77.22 Intersect the cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp. hereinbefore described.

- Thence
- S.89°44'E., on true line, bet. secs. 30 and 31
- Over flat thru scattering undergrowth.
- 10.70 Dry wash, 20 lks. wide, course SW.
- 20.00 Leave flat, bears E. and W. Asc. 335 ft. over NW. slope.
- 36.00 Spur, slopes NE.
- 36.05 Cabin bears S.9 $\frac{1}{4}$ °W. Desc. 35 ft. over SE. slope.

37.22 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

## Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.

Chains

$$\frac{S30}{\frac{1}{4} S31}$$

1930

- Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.  
Desc. 213 ft. over SE. slope to
- 43.50 Foot of hill, bears N. and W. Over flat.  
54.90 Dry wash, 15 lks. wide, course SW.  
57.50 Dry wash, 20 lks. wide, course SW.  
58.70 Secondary road, bears NE. and SW.  
61.30 Dry wash, 20 lks. wide, course SW.  
75.70 Secondary road, bears SE. and NW.
- 77.22 The cor. of secs. 29, 30, 31 and 32.

Land: flat and mountainous.

Soil: loam, 1st rate and rocky, 3rd rate.

No timber.

Undergrowth: palo verde, mesquite, greasewood, cactus, catclaw.

N.0°03'W., bet. secs. 29 and 30.

Over flat; thru scattering undergrowth.

- 1.80 Secondary road, bears NE. and SW.  
10.00 Dry wash, 10 lks. wide, course SW.  
14.80 Dry wash, 10 lks. wide, course SW.  
25.10 Dry wash, 10 lks. wide, splits, courses SW. and NW.  
34.20 Dry wash, 20 lks. wide, course W.  
38.80 Dry wash, 20 lks. wide, course NW.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$$\frac{S30}{S29}$$

1930

Raise mound of stone, 3 ft. base, 3 ft. high, W. of cor.

- 46.70 Secondary road, bears NE. and SW.  
55.15 Dry wash, 15 lks. wide, course NW.  
Over rolling land.  
56.40 Small ravine, course W.  
60.30 Dry wash, 40 lks. wide, course W.  
64.60 Dry wash, 60 lks. wide, course W.  
68.70 Dry wash, 8 lks. wide, course SW.  
71.50 Dry wash, 30 lks. wide, course NNW.  
73.10 Same wash, turns NW.  
79.70 Drain, course SE.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 19, 20, 29 and 30, with brass cap marked

T2N R7E

$$\frac{S19}{S20}$$

$$\frac{S30}{S29}$$

1930

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land: flat and rolling.

Soil: gravel loam, 1st rate.

Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.

BOOK 3923

| Chains |                                                                                                                         |
|--------|-------------------------------------------------------------------------------------------------------------------------|
|        | No timber.<br>Undergrowth: palo verde, mesquite, greasewood, cactus, catclaw.                                           |
| <hr/>  |                                                                                                                         |
|        | S.89°42'E., on random line, bet. secs. 20 and 29.                                                                       |
| 40.00  | Set temp. $\frac{1}{4}$ sec. cor.                                                                                       |
| 80.10  | Fall 7 lks. N. of the cor. of secs. 20,21,28 and 29.                                                                    |
|        | Thence                                                                                                                  |
|        | N.89°39'W., on true line, bet. secs. 20 and 29.                                                                         |
|        | Over rolling, broken land; thru scattering undergrowth,<br>Desc. 70 ft. over gently SW. slope.                          |
| 17.50  | Draw, course SW. Asc. 37 ft. over NE. slope.                                                                            |
| 25.50  | Ravine, course SE. Asc. 77 ft. over N.60°E. slope.                                                                      |
| 29.40  | Hill, slopes NE. Desc. 173 ft. over W. slope.                                                                           |
| 40.05  | Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked    |
|        | $\frac{1}{4} \frac{S20}{S29}$ 1930                                                                                      |
|        | Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.                                                                |
|        | Desc. 130 ft. over general W. slope; to wash.                                                                           |
| 53.10  | Ravine, course N.75°W.                                                                                                  |
| 56.20  | Dry wash, 25 lks. wide, course NW.                                                                                      |
| 65.20  | Dry wash, 60 lks. wide, course SW.                                                                                      |
| 71.70  | Dry wash, 30 lks. wide, course SW.                                                                                      |
| 73.10  | Drain, course SE.                                                                                                       |
| 80.10  | The cor. of secs. 19,20,29 and 30.                                                                                      |
|        | Land: rolling.<br>Soil: loam, 2nd rate.<br>No timber.<br>Undergrowth: palo verde, mequite, cactus, greasewood, catclaw. |
| <hr/>  |                                                                                                                         |
|        | N.89°44'W., on random line, bet. secs. 19 and 30.                                                                       |
| 40.00  | Set temp. $\frac{1}{4}$ sec. cor.                                                                                       |
| 77.04  | Fall 4 lks. N. of the cor. of secs. 19,24,25 and 30, on the W. bdy. of the Tp. hereinbefore described.                  |
|        | Thence                                                                                                                  |
|        | S.89°46'E., on true line, bet. secs. 19 and 30.                                                                         |
|        | Over rolling land; thru scattering undergrowth.                                                                         |
| 0.50   | Enter dry wash, course NW.                                                                                              |
| 1.50   | Wood road, follows wash.                                                                                                |
| 2.50   | Leave wash.                                                                                                             |
| 5.70   | Small ravine, course NW.                                                                                                |
| 7.30   | Old road, bears NW. and SE.                                                                                             |
| 9.50   | Secondary road, bears NW. and SE.                                                                                       |
| 10.00  | Dry wash, 40 lks. wide, course NW.                                                                                      |
| 15.70  | Secondary road, bears NW. and SE.                                                                                       |
| 16.20  | Dry wash, 10 lks. wide, course NNW.                                                                                     |
| 22.70  | Dry wash, 30 lks. wide, course NW.                                                                                      |
| 26.00  | Same road as last, bears NE. and SW.                                                                                    |
| 35.30  | Same wash as last, 20 lks. wide, course SW.                                                                             |
| 37.04  | Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked    |

## Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.

Chains

$$\frac{S19}{\frac{1}{4} S30}$$

1930

Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Asc. 316 ft. over SW. slope.

41.80 Drain, course NW., from E.

47.50 Same, course W., from SE.

60.30 Top of hill bears 2 chs. N. Desc. 180 ft. over SE. slope.

72.70 Dry wash, 30 lks. wide, course SE.

73.70 Dim road, bears N. and S.

77.04 The cor. of secs. 19, 20, 29 and 30.

Land: rolling.

Soil: loam, 1st and 3rd rates.

No timber.

Undergrowth: palo verde, mesquite, cactus, greasewood, catclaw.

N.0°03'W., bet. secs. 19 and 20.

Over rolling land; thru scattering undergrowth.

Asc. 23 ft. over SW. slope.

14.00 Spur, slopes E. Desc. 58 ft. over NE. slope.

17.70 Small ravine, course N.75°E. Asc. 9 ft.

19.00 Spur, slopes NE. Desc. 81 ft. over N. slope; to wash.

24.00 Spur, slopes NE.

27.30 Dry wash, 20 lks. wide, course NW. Asc. 41 ft. along W. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked
$$\frac{S19}{S20}$$

1930

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

44.30 Dry wash, 1 ch. wide, course NW.

46.50 Low spur, slopes NW.

48.20 Dry wash, 20 lks. wide, course NW.

51.50 Low spur, slopes NW.

54.30 Dry wash, 30 lks. wide, course NW.

56.20 Spur, slopes NW. Desc. 47 ft. over NE. slope.

58.10 Ravine, course NW. Asc. 45 ft. over SW. slope.

63.90 Spur, slopes NW. Desc. 122 ft. over NE. slope.

71.30 Dry wash, 1 ch. wide, course NW.

73.00 Drain, course SW. Asc. 41 ft. over SSE. slope.

76.40 Spurs, slope SW. and NW. Desc. 25 ft. along W. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground, with a stone, 8 x 6 x 6 ins., marked with cross (X), deposited beside, and in a mound of stone, 3 ft. base, to top, for cor. of secs. 19 and 20, only, with brass cap marked

T2N. R7E

S18

$$\frac{S19}{S20}$$

1930

Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.

BOOK 3928

Chains Land: rolling.  
 Soil: rocky, 2nd and 3rd rates.  
 No timber.  
 Undergrowth: palo verde, greasewood, catclaw, cactus, mesquite.

S.89°39'E., on random line, on N. bdy. of sec. 20.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.10 Fall 2 lks. S. of the cor. of secs. 16,17,20 and 21.  
 Thence  
 N.89°40'W., on true line, on N. bdy. of sec. 20.  
 Over mountainous land; thru scattering undergrowth.  
 Desc. 95 ft. over NW. slope.  
 4.60 Ravine, course NW. Asc. 36 ft. over NE. slope.  
 6.60 Spur, slopes NW.  
 10.10 Spur, slopes NW.  
 17.30 Spur, slopes NW. Desc. 160 ft. over NW. slope.  
 19.05 Ravine, course NW. Asc. 30 ft. over NE. slope.  
 19.40 Spur, slopes NW. Desc. 52 ft. over W. slope.  
 22.70 Ravine, course NNW. Asc. 360 ft. over NE. slope.  
 38.20 Ridge, bears SE. and NW. Desc. 12 ft. over SSE. slope.

40.05 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground, with stone, marked with cross (X), deposited beside, and in a mound of stone, 4 ft. base to top, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$  317  
 S20  
 1930

Desc. 675 ft. over general NW. slope; to cor.  
 53.20 Spur, slopes N.70°W.  
 69.20 Ravine, course NW.  
 76.20 Rocky wash, 35 lks. wide, course NW.  
 80.10 The cor. of secs. 19 and 20, only.

Land: mountainous.  
 Soil: rocky, 3rd rate.  
 No timber.  
 Undergrowth: palo verde, mesquite, catclaw, cactus, greasewood.

N.89°46'W., on random line, on N. bdy. of sec. 19.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 76.93 Fall 9 lks. N. of the cor. of secs. 13,18,19 and 24, on the W. bdy. of the Tp. hereinbefore described.  
 Thence  
 S.89°50'E., on true line, on N. bdy. of sec. 19.  
 Over rolling land; thru scattering undergrowth.  
 Desc. 41 ft. over NE. slope; to wash.  
 2.10 Drain, course NE.  
 5.40 Dry wash, 70 lks. wide, course NW.; wood road in bottom.  
 Asc. 83 ft. over W. slope.  
 13.20 Spur, slopes N. Desc. 56 ft. over NE. slope.  
 21.40 Dry wash, 30 lks. wide, course NW. Asc. 80 ft. over NW. slope.  
 30.80 Spur, slopes NW. Desc. 45 ft. over E. slope.  
 32.46 Prospect hole, 3 ft. deep, on line.  
 36.10 Dry wash, 30 lks. wide, course NNE.; wood road in bottom.

Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.

Chains

36.93 (40.00 chs. in departure from the cor. of secs. 19 and 20, only) Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 19, only, with brass cap marked

$\frac{1}{4}$  S19  
1930

Raise mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, S. of cor.

37.00 Dry wash, 5 lks. wide, course NNE.

38.30 Dry wash, 10 lks. wide, course N. Asc. 20 ft. over SW. slope.

42.06 (40.00 chs. in departure from the cor. of secs. 17 and 18, only, as hereinafter shown) Set an iron post, 3 ft. long; 1 in. diam., 18 ins. in the ground, with a stone, 10 x 8 x 6 ins., marked with cross (X) deposited beside, supported in a mound of stone, 3 ft. base,  $1\frac{1}{4}$  ft. high, for  $\frac{1}{4}$  sec. cor. of sec. 18, only, with brass cap marked

$\frac{1}{4}$  S18  
1932

42.30 Spur, slopes NNW. Desc. 34 ft. over SE. slope.

46.10 Dry wash, 30 lks. wide, course NE. Asc. 65 ft. over NW. slope.

51.50 Spur, slopes NE. Desc. 50 ft. over E. slope.

56.00 Dry wash, 30 lks. wide, course N.

57.70 Dry wash, 20 lks. wide, course NNW.

59.10 Low spur, slopes NW. Asc. general NW. slope.

62.50 Junction of 3 small washes, course NW.

66.90 Spur, slopes NW.

76.93 The cor. of secs. 19 and 20, only.

Land: rolling.

Soil: loam, 2nd rate.

No timber.

Undergrowth: palo verde, mesquite, catclaw, cactus, greasewood.

From the cor. of secs. 7 and 18, only, hereinafter described,  
S.0°03'E., on line random for distance only, on E. bdy. of sec. 18.

40.00 Set temp.  $\frac{1}{4}$  sec. cor. of sec. 18, only.

80.61 Intersect the N. bdy. of sec. 20 at a point 5.13 chs. S.89°40'E. of the cor. of secs. 19 and 20, only.

At point of intersection

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 17 and 18, only, with brass cap marked

T2N R7E

S18 S17

S20

1932

Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Thence



Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.

BOOK 3923

Chains


N.0°03'W., on true line, on E. bdy. of sec. 18.  
Over rolling land; thru scattering undergrowth.  
Along broken W. slope.

15.00 Dry wash, 20 lks. wide, course SW. Asc. 210 ft. over  
general S. slope.

21.00 Ridge, bears E. and NW. Desc. 260 ft. over N. slope.

34.00 Ravine, course NE. Asc. 30 ft. along E. slope.


40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor. of sec. 17, only, with brass  
cap marked



Raise mound of stone, 2 ft. base, 2 ft. high, E. of cor.

Desc. 15 ft. over NE. slope.

40.61 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor. of sec. 18, only, with brass  
cap marked



Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Desc. 20 ft. over ENE. slope.

41.50 Spur, slopes NE. Desc. 110 ft. over N. slope.

48.10 Wash, 20 lks. wide, course W. for 1 ch.; thence N.  
Over broken W. slope.

50.20 Dry wash, 30 lks. wide, course N., from ESE.

52.10 Same wash, course W.; from S.

56.50 Spur, slopes W.

60.90 Trail, bears E. and W.

71.80 Spur, slopes W. Desc. 40 ft. over N. slope.

75.20 Dry wash, 50 lks. wide, course W. Asc. 35 ft. over S.  
slope.

76.80 Spur, slopes W. Desc. 35 ft. over N. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in  
the ground, for cor. of secs. 8 and 17, only, with  
brass cap marked



Raise mound of stone, 3 ft. base, 2 ft. high, E. of cor.

80.04 Small drain, course NW. Asc. 12 ft. over SW. slope.

80.61 The cor. of secs. 7 and 18, only, hereinafter described.

Land: rolling and broken.

Soil: granite loam, 2nd rate.

No timber.

Undergrowth: palo verde, mesquite, gatclaw, cactus,  
greasewood.

Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.

Chains

- From the cor. of secs. 8 and 17, only,  
S. 89°40'E., on random line, bet. secs. 8 and 17.
- 34.90 Set temp.  $\frac{1}{4}$  sec. cor.
- 74.97 Fall 4 lks, S. of the cor. of secs. 8, 9, 16 and 17.  
Thence  
N. 89°42'W., on true line, bet. secs. 8 and 17.  
Over rolling land; thru scattering undergrowth,  
Spur, slopes NW.
- 11.10
- 14.40 Small ravine, course N. 25°W.
- 21.90 Dry wash, 60 lks. wide, course NW.
- 28.50 Dry wash, 15 lks. wide, course NW.
- 32.20 Dry wash, 30 lks. wide, course N.
- 39.70 Dry wash, 30 lks. wide, course N.
  
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$  S 8  
 $\frac{1}{4}$  S 17  
 1930

Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.

- 56.80 Dry wash, 10 lks. wide, course NW.
- 61.90 Trail, bears NE. and SW. Desc. 80 ft. over general NW.  
slope.
- 69.10 Small ravine, course NW.
- 74.60 Small drain, course NW.
- 74.97 The cor. of secs. 8 and 17, only.

Land: rolling.  
 Soil: rocky loam, 2nd rate.  
 No timber.  
 Undergrowth: palo verde, mesquite, catclaw, cactus,  
 greasewood.

RESURVEY of E.  $\frac{1}{2}$  of W.  $\frac{1}{2}$  of line bet secs 7 and 18.

The  $\frac{1}{4}$  sec. cor. of secs. 7 and 18, having been found missing, is re-established as shown in the following notes; the meander cor. of secs. 7 and 18, recorded 4.43 chs. East thereof, is not re-established.

From the W.  $\frac{1}{16}$ th cor. of secs. 7 and 18, which is an iron post, 1 in. diam., projecting 5 ins. above ground, firmly set, with brass cap marked:

No 2  
 $\frac{1}{16}$  S 17  
 $\frac{1}{16}$  S 18  
 1911

witnessed by pits,

East, on true line, bet. secs. 7 and 18, (E  $\frac{1}{2}$  W  $\frac{1}{2}$ )  
Over flat; thru dense undergrowth.

- 10.00 Intersect hollow iron pipe, 1 in. diam., projecting 4  
ins. above ground.
- 16.00 Desc. dirt bank, 15 ft. high, bears N. and S.
- 16.75 Old unused ditch, bears N. and S.
- 17.20 Over bottom land.
  
- 20.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the  
ground, for re-established  $\frac{1}{4}$  sec. cor., with brass cap  
marked

$\frac{1}{4}$  S 7  
 $\frac{1}{4}$  S 18  
 1930

Survey of Part (completion) of  
Subdivisions of T.2 N., R.7 E.

Chains

from which  
A mesquite, 6 ins. diam., bears N.41°E., 11 lks.dist.,  
marked  $\frac{1}{4}$  S7 BT.  
A mesquite, 6 ins. diam., bears S.22°W., 26 lks.dist.,  
marked  $\frac{1}{4}$  S18 BT.

Survey of E. half of line bet. secs. 7 and 18.


From re-established  $\frac{1}{4}$  sec. cor. of secs. 7 and 18,

East, on true line, bet. secs. 7 and 18 (E. $\frac{1}{2}$ ).  
Over bottom land; thru dense undergrowth.

4.43 Fail to find the meander cor. recorded at this point.  
4.55 Set temp. meander point, right bank of Salt River. Across  
very shallow channel of river, course Southerly.

8.02 Left bank of same channel. Point falls on soft insecure  
ground, impracticable for permanent meander cor. Over  
low sandy island.

11.00 (2.98 chs. East of true point and 1.30 West of other true  
point) Set an iron post, 3 ft. long, 1 in. diam., 28 ins.  
in the ground, for witness cor. to meander corners on  
E. and W. sides of island, with brass cap marked




Dig pits, 18 ins. square by 12 ins. deep, E. and W. of  
cor., 3 ft. dist.

12.30 Right bank of shallow channel of Salt River. Point falls  
on soft insecure ground.

17.30 Left bank of same. Point falls on soft insecure ground.  
Over low sandy island. No growth more than 20 years  
old was observed on this island.

22.40 (5.10 chs. East of true point and 22 lks. West of other  
true point) Set an iron post, 3 ft. long, 1 in. diam.,  
28 ins. in the ground, for witness cor. to meander  
corners on E. and W. sides of island, with brass cap  
marked



Dig pits, 18 ins. square by 12 ins. deep, E. and W. of  
cor., 3 ft. dist.

22.62 Right bank of main channel of Salt River. Point falls on  
soft insecure ground.

27.60 Left bank of same. Set an iron post, 3 ft. long, 1 in.  
diam., 28 ins. in the ground, with stone, marked with  
cross (X), 14 x 6 x 4 ins., deposited beside, for  
meander cor., with brass cap marked

## Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.

Chains

T2N  
 S 7  
 MC / S 18  
 R7E  
 1932

No practicable witness obtainable.

Over low bottom land, subject to extreme high waters.

- 34.95 Center of slough, 35 lks. wide, 1 ft. deep, drains SW.  
 35.90 Leave bottom land; bears NE, and SW. Asc. 45 ft.  
 40.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 7 and 18, only, with brass cap marked

T2N R7E  
 S 7  
 S18 | S8

1930

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land: flat and rolling.

Soil: sandy and loam, 1st and 2nd rates.

No timber.

Undergrowth: arrow-weed, mesquite, greasewood, cactus, catclaw, palo verde.

North, on random line, on E. bdy. of sec. 7.

- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.78 Fall 4 lks. W. of the cor. of secs. 5, 6, 7 and 8, located as hereinafter shown.  
 Returning to the cor. of secs. 7 and 18, only,  
 N.0°02'E., on true line, on E. bdy. of sec. 7.  
 Over rolling land; thru moderate undergrowth.  
 Along broken W. slope.  
 21.50 Mouth of dry wash, 50 lks. wide, course W.  
 35.50 Secondary road, bears SE. and NW.  
 38.80 Secondary road, bears E. and W.

- 39.39 (40.00 chs. in Northing from the cor. of secs. 8 and 17, only) Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 8, only, with brass cap marked

$\frac{1}{4}$   
 S8

1930

Raise mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, E. of cor.

- 39.89 (Mid-point) Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 7, only, with brass cap marked

$\frac{1}{4}$   
 S7

1930

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Over flat; thru dense undergrowth.

Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.

OOK 3923

Chains

- 40.30 Secondary road, bears E. and W.
- 46.00 Secondary road, bears NNE. and SSW.
- 49.40 Fence, bears S.10°W. and N.10°E.
- 56.50 Fence, bears E. and W.
- 59.50 Secondary road, bears E. and 1 ch. W. to apiary.
- 72.00 Telephone line, parallels power line.
- 73.02 Power line, bears N.82°52'W. and S.82°52'E. Road follows same.

79.78 (Point of intersection of line run due East bet. secs. 6 and 7 and of line run S:0°00'E. bet. secs. 5 and 6) Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs 5,6,7 and 8, with brass cap marked

T2N R7E

|    |    |
|----|----|
| S6 | S5 |
| S7 | S8 |

1930

Raise mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land: rolling and flat.

Soil: loam, 1st and 2nd rates.

No timber.

Undergrowth: mesquite, ironwood, greasewood, cactus, arrow-weed, catclaw.

East, on random line, on S. bdy. of sec. 5.

35.00 Set temp. 1/4 sec. cor. for sec. 8.

40.00 Set temp. 1/4 sec. cor. for sec. 5.

79.92 Fall 21 lks. N. of the cor. of sec. 5, only.

Thence

N.89°51'W., on true line, on S. bdy. of sec. 5.

Over rolling land; thru scattering undergrowth.

5.00 Intersect the cor. of secs. 4 and 8, only, hereinbefore described.

25.80 Spur, slopes SW.

31.00 Dry wash, 20 lks. wide, course NW.

39.96 (Mid-point) Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor. of sec. 5, only, with brass cap marked

1/4 S5

1930

Raise mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Asc. 32 ft. over NE. slope.

43.60 Spur, slopes NW. Desc. 15 ft. over NW. slope.

45.00 (40.00 chs. Westing from NE. cor. of sec. 8) Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor. of sec. 8, only, with brass cap marked

1/4 S8

1930

Raise mound of stone, 3 ft. base, 2 ft. high, S. of cor.

Desc. 95 ft. over general W. slope.

## Survey of Part (completion) of Subdivisions of T.2 N., R.7 E.

Chains

- 52.00 Over flat, bears NE. and SW., slopes gently to W.  
 53.10 Secondary road, bears NW. and SE.  
 68.30 Secondary road, bears SW. and NE.
- 79.92 The cor. of secs. 5, 6, 7 and 8.
- Land: flat and rolling.  
 Soil: loam, 1st and 3rd rates.  
 No timber.  
 Undergrowth: palo verde, mesquite, ironwood, cactus, catclaw, greasewood.
- 
- From the  $\frac{1}{4}$  sec. cor. of secs. 6 and 7, which is an iron post, 1 in. diam., projecting 10 ins. above ground, firmly set, properly marked on brass cap, dated 1911, witnessed by a mound of stone N.,
- East, on true line, bet. secs. 6 and 7 (E.  $\frac{1}{2}$ ).  
 Over gently rolling land; thru moderate undergrowth.
- 4.50 Power line, bears N. and S.  
 4.75 Pipe line, 3 ft. diam., Phoenix water supply, bears S. 30° W., and N. 30° E.  
 5.00 Road, bears N. and S.  
 6.75 Telephone line, bears N. and S.  
 11.42 Fail to find the meander cor. recorded at this point.  
 11.80 Edge of Salt River, course SW.  
 15.65 Left edge of water of river. Over low sand bar.  
 23.50 W. edge of slough, approximately round, no drainage.  
 25.50 E. edge of same.  
 25.70 True point for meander cor. on left bank of Salt River - falls on insecure ground. Asc. gravel bank, 15 ft. high, faces W.
- 26.20 (50 lks. East) Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for witness cor. to meander cor. of secs. 6 and 7, with brass cap marked
- T2N  
S6  
WCMC ST  
R7E  
1932
- Raise mound of stone, 2 ft. base, 1  $\frac{1}{2}$  ft. high, E. of cor.
- Over flat; thru dense undergrowth.
- 36.00 Asc. 10 ft.  
 36.80 Over higher flat; thru scattering undergrowth.
- 40.00 The cor. of secs. 5, 6, 7 and 8, established at this point, is hereinbefore described.
- Land: gently rolling.  
 Soil: sandy, 1st rate.  
 Timber: very scattering cottonwood.  
 Undergrowth: mesquite, arrow-weed, palo verde, cactus, catclaw, ironwood, greasewood.
- 

RESURVEY OF THE S.  $\frac{1}{2}$  OF THE N.  $\frac{1}{2}$  BET. SECS. 5 AND 6.

From the N.  $\frac{1}{16}$ th cor. of secs. 5 and 6, which is an iron post, 1 in. diam., projecting 10 ins. above ground

Resurvey and Survey of Part (completion) of  
Subdivisions of T.2 N., R.7 E.

DOK 3923

Chains

and mound of stone, firmly set, with brass cap marked

No 6  
1  
16  
S6|S5  
191

S0°01'E., on true line, bet. secs. 5 and 6, (S $\frac{1}{2}$ N $\frac{1}{2}$ )  
Over rolling land; thru scattering undergrowth.  
Desc. general SE. slope.

- 12.80 Stave pipe line, 3 ft. diam., Phoenix water supply, bears NE. and SW.
- 13.00 Road, follows pipe line.
- 16.00 Fail to find the meander cor. recorded at this point.
- 16.50 Over low bottom land, bears E. and W.
- 20.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
S6|S5  
1930

from which  
A palo verde, 4 ins. diam., bears N.2°E., 315 lks. dist., marked  $\frac{1}{4}$  S5 BT.  
A cottonwood, 12 ins. diam., bears N.37°W., 262 lks. dist., marked  $\frac{1}{4}$  S6 BT (Only cottonwood in vicinity).

-----  
SURVEY OF S.  $\frac{1}{2}$  BET. SECS. 5 AND 6.

From  $\frac{1}{4}$  sec. cor. of secs. 5 and 6.  
S0°01'E., on true line, bet. secs. 5 and 6 (S.  $\frac{1}{2}$ ).  
Over sandy bottom land; thru scattering undergrowth.

- 8.10 Edge of water, right bank of Salt River, 5 ft. high, bears SW. and NE.
- 14.35 Edge of water, left bank of Salt River, course SW.
- 14.57 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for meander cor. of secs. 5 and 6, with brass cap marked

MC  
S6|S5  
T2N R7E  
1932

Raise mound of stone, 3 ft. base, 2 ft. high, S. of cor.

- Asc. 20 ft. over NE. slope.
- 15.80 Short spur, slopes W. Desc. 15 ft.
- 16.80 Draw, course W. Asc. 15 ft.
- 17.80 Over gently rolling flat, bears E. and W.
- 29.80 Dim road, bears NW. and SE.

39.82 The cor. of secs. 5, 6, 7 and 8, established at this point, is hereinbefore described.

Land: gently rolling.  
Soil: sandy loam, 1st rate.  
No timber.  
Undergrowth: arrow-weed, mesquite, catclaw, cactus, greasewood, palo verde.

## Meanders in T.2 N., R.7 E.

Chains

The following notes describe the meanders of the Salt River on both banks thru secs. 1, 2 and 4, and of the left bank and islands thru secs. 5, 6, 7 and 18. The right bank of the river thru secs 5, 6, 7 and 18 was meandered in 1911, before the control of the water of the Salt River by the Roosevelt and other dams had lowered the elevation of the vegetation line. The meanders hereinafter described attempt to follow the high water line established in the 10 years from 1920 to 1930, which is an estimated 5 ft. lower than the high water line as existent in 1911, the date of the earlier meanders.

-----  
Meanders in sec. 1.

From the meander cor. 55.36 chs. N.0°09'W. of cor. of secs. 1, 2, 11 and 12,  
Along left bank of river, at mean high water line, upstream thru sec. 1.

|                         |            |                                                                               |
|-------------------------|------------|-------------------------------------------------------------------------------|
| N.84°E.                 | 5.40 chs.  |                                                                               |
| S.84 $\frac{1}{2}$ °E., | 4.00       | a point 20 lks. in channel.                                                   |
|                         | 6.00       | point of cliffs, projects N.                                                  |
|                         | 7.00       | a point 30 lks. in channel.                                                   |
|                         | 7.50       | Over sand bar.                                                                |
|                         | 8.50       | Leave same.                                                                   |
|                         | 9.90 chs.  | -Thence                                                                       |
| N.59°E.                 | 3.50 chs.  | Along base of cliff.                                                          |
| S.72°E.                 | 1.50 chs.  |                                                                               |
| N.51 $\frac{1}{2}$ °E.  | 1.70 chs.  |                                                                               |
| N.88°E.                 | 1.00       | a point 20 lks. in channel.                                                   |
|                         | 2.20       | a point 5 lks. on bank.                                                       |
|                         | 4.40       | a point 20 lks. in channel at mouth of ravine.                                |
|                         | 5.00 chs.  | -Thence                                                                       |
| N.42 $\frac{1}{2}$ °E., | 0.50       | a point 25 lks. in channel.                                                   |
|                         | 4.00       | a point 25 lks. in channel.                                                   |
|                         | 4.50 chs.  | -Thence                                                                       |
| N.5°W.,                 | 2.00 chs.  | -Thence                                                                       |
| N.28°E.,                | 17.00 chs. | -Thence                                                                       |
| N.40 $\frac{1}{2}$ °E., | 5.40 chs.  | to the meander cor. 39.60 chs. West of cor. of Ts. 2 and 3 N., Rs. 7 and 8 E. |

-----  
From the meander cor. 58.45 chs. N.0°09'W. of the cor. of secs. 1, 2, 11 and 12,  
Meandering mean high water of right bank upstream thru sec. 1,

|                         |            |                                                                                                     |
|-------------------------|------------|-----------------------------------------------------------------------------------------------------|
| East                    | 5.00 chs.  |                                                                                                     |
| N.81 $\frac{1}{2}$ °E., | 4.30 chs.  |                                                                                                     |
| N.89 $\frac{1}{2}$ °E., | 13.30 chs. |                                                                                                     |
| N.52 $\frac{1}{4}$ °E., | 1.00 chs.  | to point opposite lower end of island, 2.50 chs. long NE-SW, 20 lks. wide, lies near opposite bank. |
| N.40°E.,                | 3.00 chs.  | to point opposite upper end of same.                                                                |
| N.5°E.,                 | 2.00 chs.  |                                                                                                     |
| N.33 $\frac{1}{2}$ °E., | 21.78 chs. | to the meander cor. 42.40 chs. West of the cor. of Ts. 2 and 3 N., Rs. 7 and 8 E.                   |

-----



Meanders in Sec.2.

From the meander cor. 42.35 chs. West of the cor. of secs. 1 and 2, only, on the N. bdy. of the Tp., Meandering left bank of Salt River upstream thru sec. 2.

- S. 21 1/4° E., 10.20 chs.
- S. 7 1/2° E., 5.00 "
- S. 32 1/2° E., 1.80 "
- S. 21° E., 6.40 "
- S. 59° E., 5.70 "
- S. 26° E., 1.80 "

to point from which Monroy's ranch bears about 10 chs. S. 30° E. Thence

- S. 85 1/2° E., 13.20 "
- N. 86° E., 15.90 "

to the meander cor. 26.69 chs. S. 0° 09' E. of the cor. of secs. 1 and 2, only, on the N. bdy. of the Tp.

From the meander cor. 38.42 chs. West of the cor. of secs. 1 and 2, only, on the N. bdy. of the Tp.; Meandering right bank of Salt River upstream thru sec. 2.

- S. 8 1/2° E., 12.10 chs.
- S. 30° E., 9.60 "
- S. 45° E., 2.10 "
- S. 67 1/4° E., 2.80 "
- S. 77° E., 4.70 "
- S. 81 1/2° E., 3.00 "

- S. 89 1/2° E., 10.10 "
- N. 85 1/2° E., 10.10 "

to the meander cor. 23.60 chs. S. 0° 09' E. of the cor. of secs. 1 and 2, only, on the N. bdy. of the Tp.

Meanders in sec. 4.

From the meander cor. 18.51 chs. West of the cor. of secs. 3 and 4, only, on the N. bdy. of the Tp., Meandering left bank of Salt River downstream thru sec. 4.

- S. 39 1/2° W., 6.80 chs. to a point "KK". Along side channel.
- S. 1 1/2° W., 7.50 "
- S. 20° W., 1.20 "
- S. 54 1/2° W., 2.70 "
- S. 18 1/2° W., 1.70 "
- S. 30 1/2° W., 1.90 "

S. 7 1/2° W., (0.60) "to junction of fences, bear NE. and SE.; stock water hole. (0.80) to mouth of wash from NE.

- 2.50 chs.
- S. 29° W., 2.10 "
- S. 61 1/4° W., 1.60 "
- N. 37° W., 3.50 "
- S. 75 1/2° W., 1.90 "
- S. 70° W., 3.90 "
- S. 59° W., 4.30 "
- S. 74 1/2° W., 3.10 "
- S. 87° W., 3.00 "
- N. 57° W., 1.50 "

- N. 72 1/4° W., 4.50 "
- S. 84 1/4° W., 3.20 "

to a point opposite lower end of island; thence along main channel.

## Meanders in T.2 N., R.7 E.

(Sec. 4, continued)

S.  $76\frac{1}{2}^{\circ}$ W., 4.10 chs.  
 N.  $84\frac{1}{2}^{\circ}$ W., 1.10 chs.  
 S.  $26^{\circ}$ W., 10.50 chs.  
 N.  $69^{\circ}$ W., 2.10 chs.  
 N.  $26^{\circ}$ W., 1.40 chs.  
 N.  $64\frac{1}{2}^{\circ}$ W., 1.00 ch. to the meander cor. 23.16 chs. S.  $0^{\circ}01'E.$   
 of the cor. of secs. 4, 5, 32 and 33,  
 on the N. bdy. of the Tp.

-----  
 From the meander cor. 24.03 chs. West of the cor. of secs.  
 3 and 4, only, on the N. bdy. of the Tp.,  
 Meandering right bank of river downstream thru sec. 4.

S.  $52\frac{3}{4}^{\circ}$ W., 6.55 chs.  
 S.  $60^{\circ}$ W., 2.70 "  
 S.  $33^{\circ}$ W., 3.70 "  
 S.  $62^{\circ}$ W., 5.80 "  
 S.  $70^{\circ}$ W., 6.60 "  
 S.  $64\frac{3}{4}^{\circ}$ W., 8.50 "  
 S.  $6^{\circ}$ W., 0.90 "  
 S.  $69\frac{1}{2}^{\circ}$ W., 5.30 "  
 S.  $40\frac{1}{2}^{\circ}$ W., 2.60 "  
 S.  $65\frac{1}{4}^{\circ}$ W., 1.50 "  
 S.  $85\frac{1}{4}^{\circ}$ W., 7.40 "  
 N.  $71\frac{1}{4}^{\circ}$ W., 4.30 "  
 North 3.70 "  
 N.  $50\frac{3}{4}^{\circ}$ W., 3.55 " to the meander cor. 15.61 chs. S.  $0^{\circ}01'E.$  of  
 the cor. of secs. 4, 5, 32 and 33, on the  
 N. bdy. of the Tp.

-----  
 From the meander cor. 8.62 chs. S.  $0^{\circ}01'E.$  of the cor. of secs.  
 4, 5, 32 and 33, on the N. bdy. of the Tp.,  
 Meandering left bank of slough upstream thru sec. 4.

N.  $25^{\circ}$ E., 4.50 chs.  
 N.  $51\frac{1}{2}^{\circ}$ E., 1.40 "  
 N.  $25\frac{1}{2}^{\circ}$ E., 4.07 " (Across mouth of slough from E.) to the  
 meander cor. 4.75 chs. East of the cor.  
 of secs. 4, 5, 32 and 33, on the N. bdy.  
 of the Tp.

-----  
 At a point 13.82 chs. S.  $0^{\circ}02'E.$  of the  $\frac{1}{4}$  sec. cor. on the  
 N. bdy. of sec. 4,  
 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
 ground, for special meander cor. in sec. 4, with brass  
 cap marked

SMC  
 C  
 ---  
 S | 4  
 C  
 1932

Raise mound of stone, 3 ft. base, 2 ft. high, S. of cor.

Thence  
 Meandering island in sec. 4,

N.  $63\frac{1}{4}^{\circ}$ E., 5.60 chs.  
 N.  $58\frac{1}{4}^{\circ}$ E., 4.70 "  
 N.  $57\frac{1}{2}^{\circ}$ E., 5.70 "

Meanders in T.2 N., R.7 E.

(Sec.4, continued)

- N.87°E., 0.95 chs. Thence around side channel.
- S.1½°E., 7.40 "
- S.31½°W., 0.70 "
- S.45°W., 2.60 "
- S.19°W., 1.80 "
- S.28°W., 2.10 "
- S.3°W., 2.50 "
- S.27°W., 1.60 "
- S.46°W., 1.00 "
- N.36°W., 3.50 "
- West 2.30 "
- S.70°W., 4.30 "
- S.57°W., 4.10 "
- S.82½°W., 2.60 "
- N.86½°W., 2.40 "
- N.59°W., 1.60 "
- N.73°W., 4.90 "
- S.87°W., 3.00 "
- North, 0.20 " Thence up left bank of main channel.
- N.45½°E., 1.80 "
- N.63°E., 10.30 "
- N.64½°E., 6.40 " to special meander cor., place of beginning.

MEANDERS OF PART OF ISLAND IN SEC.4.

- Beginning at true point for meander cor. 17.20 chs.S.0°01'E. of the cor. of secs. 4,5,32 and 33, on the N. bdy. of the Tp.,
- S.44°E., 1.50 chs.
- S.28½°E., 1.90 "
- S.29°W., 1.00 "
- N.63¾°W., 1.63 " to true point for meander cor., 20.10 chs.S.0°01'E. of the cor. of secs. 4,5, 32 and 33, on N. bdy. of Tp.

MEANDERS OF PART OF ISLAND IN SEC.5.

- Beginning at true point for meander cor., 17.20 chs.S.0°01'E. of the cor. of secs. 4,5,32 and 33, on the N. bdy. of the Tp.,
- N.64¾°W., 1.90 chs.
- S.7½°E., 2.60 "
- S.50½°E., 1.78 " to true point for meander cor., 20.10 chs.S.0°01'E. of the cor. of secs. 4,5, 32 and 33, on N. bdy. of Tp.

Meanders of part of Right Bank of Salt River, downstream thru sec. 5.

- Beginning at the meander cor. 15.61 chs.S.0°01'E. of the cor. of secs. 4,5,32 and 33, on the N. bdy. of the Tp.,
- N.75°W., 3.30 chs.
- N.52¼°W., .70 "
- N.3½°W., 2.20 "
- N.80°E., 1.45 "
- N.37°E., 4.08 " to the meander cor. 8.62 chs.S.0°01'E. of the cor. of secs. 4,5,32 and 33, on the N. bdy. of the Tp.

## Meanders in T.2 N., R.7 E.

## (Sec. 5, continued)

From the meander cor. 23.16 chs. S.0°01'E. of the cor. of  
secs. 4, 5, 32 and 33, on the N. bdy. of the Tp.,  
Meandering left bank of river downstream thru sec. 5.

N.53°W., 6.30 chs. to point from which E. end of island,  
20 lks. wide, bears N.22°W., 115 lks.  
dist.

N.76°W., 3.50 chs. to point from which W. end of same  
bears N.10°W., 96 lks. dist,

S.80°W., 1.30 chs.

S.38½°W., (10.80)" to center of slough, 1.50 chs. wide,  
from E.

11.60 " to point from which points on island  
bear: N.14°W., 3.10 chs.  
N.16°W., 1.90 "  
N.63°W., 3.50 "  
N.23°E., 4.30 "  
N.26°E., 4.10 "

N.74°W., 1.80 chs.

N.87°W., 2.50 "

S.76°W., 3.80 "

S.69°W., 5.90 "

S.80°W., 5.60 "

S.72°W., 4.60 "

S.59½°W., 2.80 "

S.74¾°W., 6.50 "

S.70½°W., 1.00 "

S.47½°W., 2.00 "

S.63°W., 18.30 "

S.58°W., 1.60 "

S.57°W., 3.50 "

S.53½°W., 2.50 "

S.49½°W., 6.50 "

S.60°W., 1.00 " to the meander cor. 25.25 chs. N.0°01'W. of  
the cor. of secs. 5, 6, 7 and 8.

## MEANDERS IN SEC. 6.

From the meander cor. 25.25 chs. N.0°01'W. of the cor. of  
secs. 5, 6, 7 and 8,  
Meandering left bank of river downstream thru sec. 6.

S.38½°W., 8.70 chs.

S.32½°W., 3.90 "

S.3¼°E., 2.20 "

S.24¼°W., 11.10 " A low sand bar lies bet. this course  
and the water of the river.

S.39½°W., 3.70 " to the true point for meander cor. of  
secs. 6 and 7, 14.30 chs. West of the  
cor. of secs. 5, 6, 7 and 8.

## MEANDERS IN SEC. 7.

From the true point for meander cor. of secs. 6 and 7,  
14.30 chs. West of the cor. of secs. 5, 6, 7 and 8,

Meandering left bank of river downstream thru sec. 7.

S.32°W., 0.60 Chs.

West, 1.30 " to point of rocks, projects N.

S.19°W., 4.50 " to point under power line, bears  
S.82°57'E. and S.64°33'W. South end  
of wing of turnout structure of old

Meanders in T.2 N., R.7 E.

(Sec.7, continued)

Arizona Canal bears S.19°05'W.

S.16 1/4°W., 4.20 chs.

S.3 1/4°W., 4.30 "

S.10 1/4°E., 3.60 "

to point from which same point on turnout structure bears S.24°25'W. A-frame of power line across river bears N.77°16'W.

S.6 1/4°W., 9.10 chs.

S.5 1/4°E., 4.00 "

S.9 1/4°E., 3.00 "

S.16 1/8°E., 3.10 "

S.6 1/8°E., 15.00 "

S.10 1/8°E., 3.00 "

S.5 1/8°E., 6.00 "

S.16 1/8°E., 3.10 "

S.2 1/8°E., 12.60 "

This course over sand bar, 2 chs. from water of river.

S.8°E., 3.20 "

S.6°E., 1.84 "

to the meander cor. of secs. 7 and 18, 12.40 chs. West of the cor. of secs. 7 and 18, only.

PART OF ISLAND IN SEC.7.

From the true point for meander cor. of secs. 7 and 18, 22.70 chs. West of the cor. of secs. 7 and 18, only,

Meandering island in sec. 7,

N.41 1/4°E., 4.70 chs.

S.40°E., 3.10 "

S.11°E., 1.17 "

to the true point for meander cor. of secs. 7 and 18, 17.38 chs. West of the cor. of secs. 7 and 18, only.

PART OF ISLAND IN SEC.7.

From the true point for meander cor. of secs. 7 and 18, 31.98 chs. West of the cor. of secs. 7 and 18, only,

Meandering island in sec. 7,

N.12 3/4°E., 11.50 chs.

N.18 1/8°E., 3.80 chs.

N.60°E., 6.50 "

S.1 1/2°E., 11.40 "

S.49°W., 3.30 "

S.30 1/4°W., 5.80 "

to true point for meander cor. of secs. 7 and 18, 27.70 chs. West of the cor. of secs. 7 and 18, only.

PART OF ISLAND IN SEC.18.

From true point for meander cor., 27.70 chs. West of the cor. of secs. 7 and 18, only,

Meandering island in sec. 18.

S.29 1/4°W., 4.40 chs.

S.36°W., 5.30 "

North 3.50 "

N.12 1/8°E., 4.72 "

to true point for meander cor., 31.98

## Meanders in T.2 N., R.7 E.

(Sec. 18, continued)

chs. West of the cor. of secs. 7 and 18,  
only.-----  
From the true point for meander cor. bet. secs. 7 and 18,  
22.70 Chs. West of the cor. of secs. 7 and 18, only,

Meandering island in sec. 18.

S. 57° W., 5.40 chs.

S. 33 $\frac{1}{2}$ ° W., 10.00 "S. 9 $\frac{1}{4}$ ° W., 14.00 "S. 20 $\frac{1}{2}$ ° W., 6.30 "S. 86 $\frac{1}{2}$ ° E., 1.40 "

N. 85° E., 2.50 "

N. 74 $\frac{1}{2}$ ° E., 5.50 "

N. 43° E., 8.00 "

N. 34 $\frac{3}{4}$ ° E., 5.30 "N. 25 $\frac{1}{2}$ ° E., 4.40 "N. 14 $\frac{1}{2}$ ° E., 3.80 "

N. 3° E., 2.30 "

N. 0 $\frac{1}{4}$ ° E., 3.20 "

N. 17° W., 1.40 "

N. 11 $\frac{1}{2}$ ° W., 3.40 "N. 11 $\frac{1}{2}$ ° E., 1.38 "to the true point for meander cor. bet.  
secs. 7 and 18, 17.38 chs. West of the  
cor. of secs. 7 and 18, only.-----  
From the meander cor. 12.40 chs. West of the cor. of secs.  
7 and 18, only,

Meandering left bank of river downstream thru sec. 18.

S. 69 $\frac{1}{4}$ ° E., 4.10 chs.

S. 3° E., 7.00 "

S. 12 $\frac{3}{4}$ ° W., 9.90 "S. 33 $\frac{1}{2}$ ° W., 7.70 "S. 50 $\frac{1}{4}$ ° W., 2.40 "S. 70 $\frac{1}{2}$ ° W., 0.70 "

S. 43° W., 3.00 "

S. 28° W., 1.10 "

S. 42 $\frac{1}{2}$ ° W., 1.20 "S. 67 $\frac{1}{2}$ ° W., 17.40 "S. 53 $\frac{1}{4}$ ° W., 10.40 "

S. 63° W., 5.80 "

S. 69 $\frac{1}{2}$ ° W., 16.00 "S. 75 $\frac{1}{2}$ ° W., 8.80 "S. 73 $\frac{1}{4}$ ° W., 3.50 "S. 81 $\frac{1}{4}$ ° W., 3.83 "to the true point for meander cor. of  
secs. 13 and 18, on the W. bdy. of the  
Tp., 25.42 chs. N. 2° 38' E. of the cor. of  
secs. 13, 18, 19 and 24.

General Description

The township lies about 15 miles NE. of the town of Mesa, Ariz., from which a good road runs NE. thru the township.

The land is about equally divided between hills and flat desert. The elevation of the flat portion is from 1300 to 1500 ft.; the remainder rising to nearly 3000 ft. Soil on the flat portion is a sandy loam of excellent quality.

There is no timber except some cottonwood along the Salt River, which runs Westerly thru the N. part of the township. A heavy growth of arrow-weed and mesquite is present on the low ground along the river. The remainder of the township has the usual desert growths.

The Verde River joins the Salt River in sec. 5. That portion of the township which lies West of the Salt and Verde was surveyed in 1911 as part of the Salt River Indian Reservation. The water supply pipe line of the city of Phoenix, a power line, a telephone line and a secondary road cross that portion.

A power line runs from the Stewart Mt. dam, about 5 miles East, Westerly thru the township.

Stock ranches are located in secs. 2 and 4. Another ranch and the Blue Point Ranger Station are located just North of the township in sec. 34. Three or four homestead residences are located in the SW. part.

The N. two-thirds of the township, which has agricultural possibilities, is in the Tonto National Forest Reserve. The S. one-third, while offering less agricultural possibilities, is an interesting prospect for winter residence sites.

BOOK 3923

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Theodore Vander Meer U.S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer, for Group 162, Arizona bearing date of the 8th day of January, 1930, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, RESURVEYED all those parts or portions of the West Bdy. and Subdivision Lines of Township 2 North, Range 7 East and SURVEYED all those parts or portions of the East Bdy. and Subdivision Lines and Meanders of the Banks of Salt River, slough, and islands in said river, in

Township 2 North, Range 7 East of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes and by diagram on page 1 hereof as having been executed by me, and under my direction; and that all the corners of said resurvey and survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer, for Group 162, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such resurvey and survey.

Place: Phoenix, Arizona
Date: February 11, 1932.

[Signature of Theodore Vander Meer]
U.S. Transitman

APPROVAL.

OFFICE OF U. S. SUPERVISOR OF SURVEYS,
Denver, Colo., March 26, 1932.

The foregoing field notes of the resurvey of Part of the West Bdy., and Part of the Subdivision Lines of Township 2 North, Range 7 East and of the survey of the East Bdy., Part (Completion) of the North Bdy., Part (Completion) of the Subdivision Lines, and Meanders of the Banks of Salt River, slough, and islands in said river, in

Township 2 North, Range 7 East of the Gila and Salt River Base and Meridian, in the State of Arizona executed by Theodore Vander Meer, U.S. Transitman under his special instructions dated January 8, 1930 for Group 162, Ariz., having been critically examined, and the necessary corrections and explanations made, the said field notes, and the resurveys and surveys they describe, are hereby approved.

[Signature of U.S. Supervisor of Surveys]
U. S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above described surveys in has been correctly copied from the original notes on file in this office.

U. S. Supervisor of Surveys.



