

3924

167 ORIGINAL

①

4-679

Book "C"

Group 162, Arizona

BOOK 3924

# FIELD NOTES

OF THE RESURVEY OF

Part of the West Boundary

AND OF THE SURVEY OF THE

Subdivision Lines of

Township 6 South, Range 10 West

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

Theodore VanderMeer, U.S. Transitman

In the capacity of U. S. Surveyor, under Special Instructions dated January 8, 1930, issued by the District Cadastral Engineer to govern surveys included in Group No. 162, Arizona, which were approved by the Commissioner of the General Land Office, January 18, 1930, and Assignment Instructions dated Feb. 21, 1930.

Resurvey and Survey commenced April 16, 1930.

Resurvey and Survey completed April 29, 1930.


3924

3924

Book "C"

Group 162 Arizona

BOOK 3924

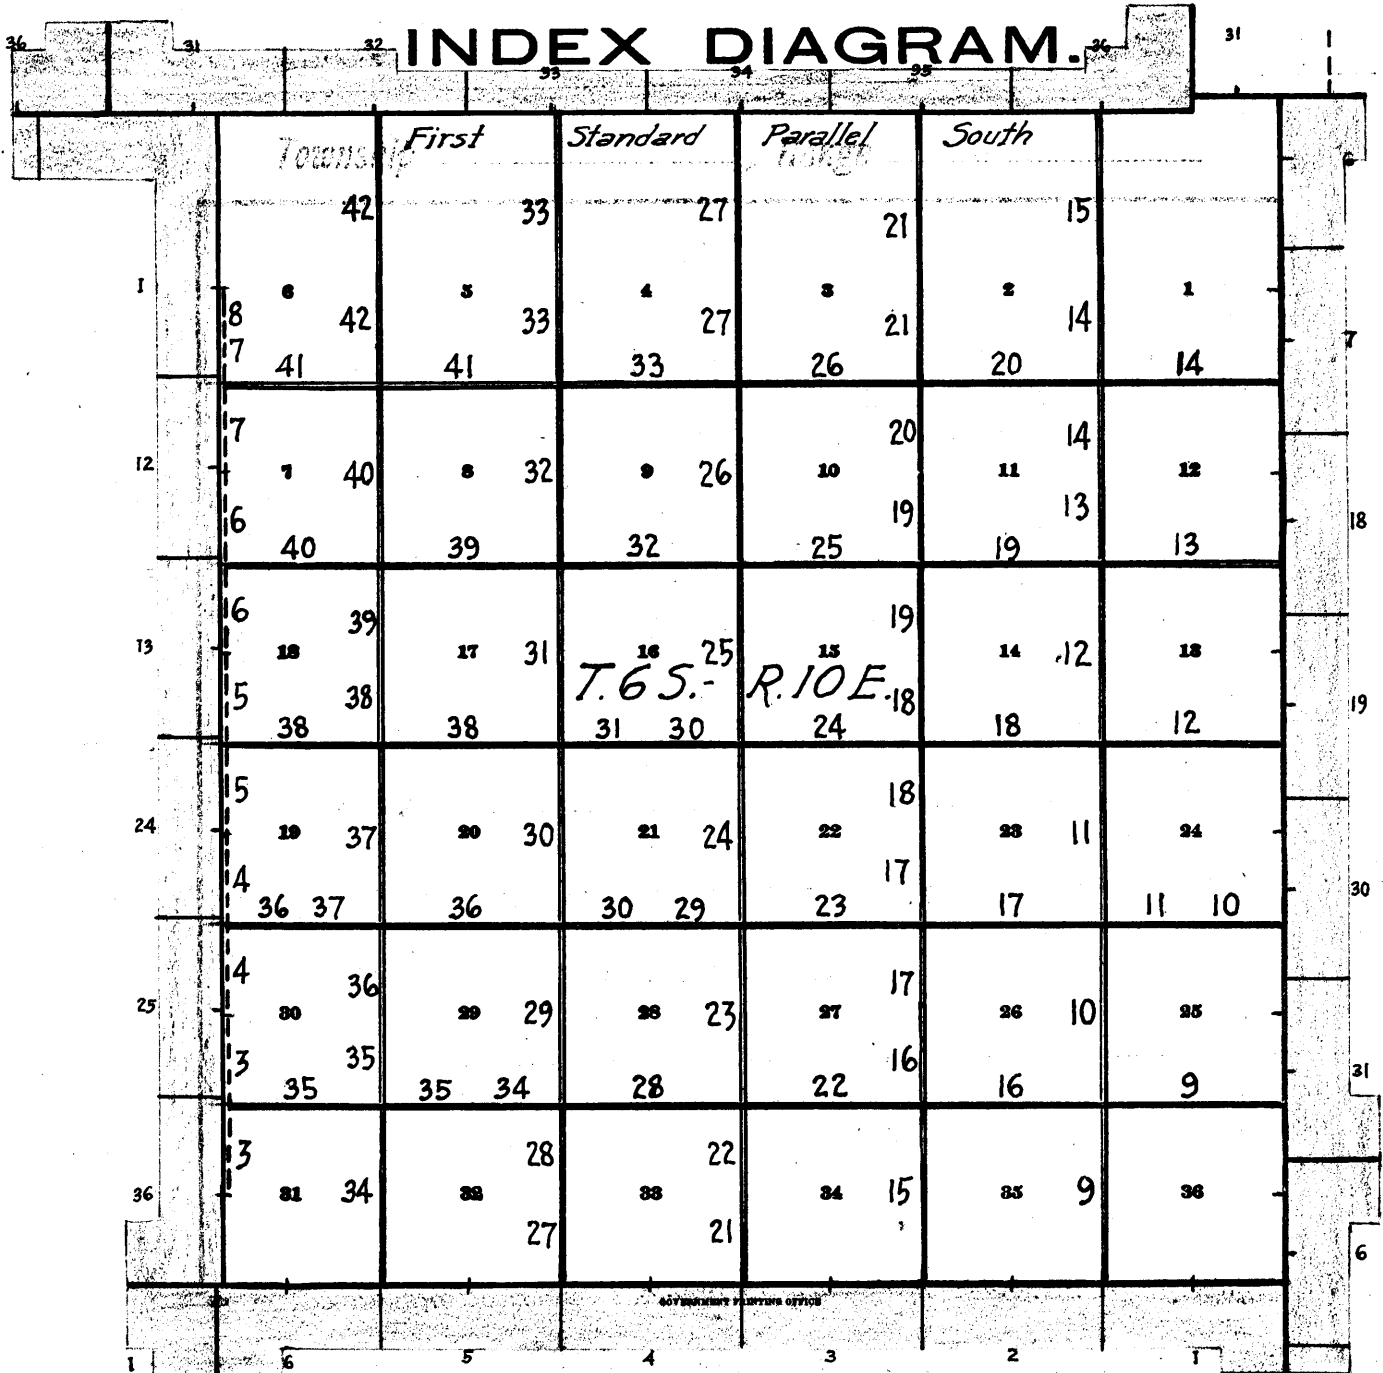


———— Lines surveyed under this group.

----- Lines resurveyed under this group.

———— Accepted, surveyed lines.

----- Unsurveyed.

 Areas surveyed as per accepted plats on file.

Book "C"  
 Group 162--Arizona  
 Township 6 South, Range 10 East  
 DATE DIAGRAM  
 1930

	First	Standard	Parallel	South
4-25	6 4-29	5 4-25	4 4-26	3 4-26
4-25	7 4-25	8 4-25	9 4-23	10 4-24
4-25	18 4-24	17 4-23	16 4-21	15 4-22
4-23	19 4-23	20 4-21	21 4-19	22 4-18
4-23	30 4-23	29 4-21	28 4-19	27 4-18
4-16	31 4-21	32 4-19	33 4-18	34 4-17

- Indicates resurveys executed by T.VanderMeer, U.S. Transitman, on dates shown thereon in 1930.
- Indicates surveys executed by T.VanderMeer, U.S. Transitman, on dates shown thereon in 1930.
- Accepted, surveyed lines.

Surveys herein described were executed on dates shown on diagram on page 1, hereof, by Theodore VanderMeer, U. S. Transitman, using Buff and Buff solar transit No. 10125. The instrument is equipped with U-shaped standards, a 4 $\frac{1}{2}$  inch horizontal circle, a 4 inch vertical circle and improved Smith solar attachment. Unless otherwise specified, all azimuth determinations are made with the solar attachment.

PRELIMINARY TEST.

April 15, 1930: Examine the adjustment of the instrument and find no errors; then, to test the solar apparatus by comparing its indications from observations made during a.m. and p.m. hours with a meridian established by observation on Polaris, proceed as follows:

April 16, in camp in SW quarter of sec. 3, T.6 S., R.10 E., G. & S.R. B. & M., Arizona, latitude  $32^{\circ}55'30''$  N., longitude  $111^{\circ}18'30''$  W., at 6<sup>h</sup>08<sup>m</sup> a.m., l.m.t., observe Polaris at Eastern Elongation, making four observations, two each with the telescope in direct and reversed positions, and mark the mean point in the line thus determined by a tack in a peg driven firmly in the ground about 6 chs. northerly of station.

Azimuth of Polaris at E.E. =  $1^{\circ}16'32''$ .

At 7 a.m. lay off the azimuth of Polaris,  $1^{\circ}16\frac{1}{2}'$  to the West, and mark the meridian thus determined by a tack in a peg driven firmly in the ground about 6 chs. N. of station.

At 8:00 a.m., app.t., set off  $32^{\circ}55\frac{1}{2}'$  N. on the latitude arc,  $10^{\circ}01\frac{1}{2}'$  N. on the declination arc, and determine a meridian with the solar, which agrees within 1' with the true meridian.

At app. noon, with the latitude arc unchanged, observe the sun on the meridian; the resulting reading of the declination arc is  $10^{\circ}04\frac{1}{2}'$  N. which agrees with the computed declination of the sun.

At 4:00 p.m.<sup>app.t.</sup> with the latitude arc unchanged, set off  $10^{\circ}08\frac{1}{2}'$  N. on the declination arc, and determine a meridian with the solar, which agrees within  $1\frac{1}{2}'$  with the true meridian.

As all of the solar observations during the usual hours of solar work come within  $1\frac{1}{2}'$  of the true meridian, conclude that the adjustments of the instrument are satisfactory.

-----

All measurements are made with a Lallie steel tape, 5.00 chs. in length, compared with a Lufkin standard steel tape, 1.00 ch. in length, and found correct. The measurements are made on the slope, the vertical angles determined with clinometers, and the slope measurements properly corrected to true horizontal distances.

Final test

April 29, 1930, at 8<sup>h</sup>00<sup>m</sup> a.m., app.t., set off  $32^{\circ}55\frac{1}{2}'$  N. on the latitude arc and  $14^{\circ}23'$  N. on the declination arc and determine a meridian with the solar, which agrees within 1' with the true meridian.

At 4<sup>h</sup>00<sup>m</sup> p.m., app.t., with the lat. arc unchanged, set off  $14^{\circ}29'$  N. on the declination arc and determine a meridian with the solar, which coincides with the true meridian.

Resurvey of Part of West Boundary of T.6 S., R.10 E.


Chains

The W. bdrs. of secs. 6, 7, 18, 19 and 30 of T.6 S., R.10 E., were surveyed in 1891 by D. Drummond, U.S.D.S. and the W. bdy. of sec. 31 was surveyed in 1913 by J.B. Wright, U.S.S., both surveys establishing sec. and  $\frac{1}{4}$  sec. cors. with common reference to areas E. and W. of the line. The entire boundary was resurveyed in 1928 by O.O. Gould, U.S.T., who perpetuated or re-established the original points with iron posts marked for original common reference.

The following notes describe a resurvey of the W. bdrs. of secs. 7, 18, 19 and 30, S.  $\frac{1}{2}$  of sec. 6, and N.  $\frac{1}{2}$  of sec. 31, of T.6 S., R.10 E., re-establishing  $\frac{1}{4}$  sec. and sec. cors. alternately, on the range line, at intervals of 40.00 chs., counting distance from the cor. of Ts. 6 and 7 S., Rs. 9 and 10 E., with reference to areas E. of line, only, and altering all existing cor. monuments on that portion of the bdy. to refer to areas W. of the line, only. Topography is copied from the record of the Gould resurvey of the line.

The S.  $\frac{1}{2}$  of the line bet. secs. 31 and 36, is recorded by Gould to have a bearing and distance of North, 40.05 chs.; therefore no alteration is made to the  $\frac{1}{4}$  sec. cor. of secs. 31 and 36.


The  $\frac{1}{4}$  sec. cor. of secs. 31 and 36 is an iron post, 1 in. diam., projecting 8 ins. above a mound of stone, 4 ft. base, with brass cap marked



Cor. is under fence, extending N. and S.

Thence, N.0°00'E., on true line, bet. secs. 31 and 36 (N.  $\frac{1}{4}$ ) Over mountainous land; through scattering undergrowth; timber.

- 8.20 Desc. 85 ft. over NE. slope.
- 17.40 Wash, 25 lks. wide, course NW. Asc. 85 ft. over SW. slope.
- 21.40 Small spur, slopes W. Desc. 108 ft.
- 39.95 (80.00 chs. in northing from Tp. cor.) Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground, supported by a mound of stone, for re-established cor. of secs. 30 and 31, only, with brass cap marked




Raise a mound of stone, 3 ft. base, 3 ft. high, E. of cor.

Thence, N.0°00'E., on true line, on W. bdy. of sec. 30 (S.  $\frac{1}{4}$ ) Over rolling land; through scattering timber and brush.

- 0.44 Intersect the cor. of secs. 25, 30, 31 and 36, which is an iron post, 2 ins. diam., projecting 6 ins. above ground, firmly set, properly marked on brass cap, witnessed by a mound of stone, W. of cor.


This monument now refers to secs. 25 and 36, only. For the changed reference alter the marks on the brass cap to read:



4 Resurvey of Part of W. Boundary of T.6 S., R.10 E.

Chains No change in accessory required.  
 Thence, N.0°02'W., on true line, continuing measurement  
 of W. bdy. of sec. 30.  
 15.29 Wash, 15 lks. wide, course NW.  
 20.99 Wash, 40 lks. wide, course SW.; continue over level ground.  
 27.69 Wash, 30 lks. wide, course SW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the  
 ground, for re-established  $\frac{1}{4}$  sec. cor. of sec. 30,  
 only, with brass cap marked



Raise a mound of stone, 3 ft. base, 2 ft. high, E. of  
 cor.

40.19 Wash, 15 lks. wide, course W.

40.56 Intersect the  $\frac{1}{4}$  sec. cor. of secs. 25 and 30; which is an  
 iron post, 1 in. diam., projecting 4 ins. above ground,  
 firmly set and properly marked on brass cap. No  
 accessories.


This monument now refers to the quarters of sec. 25, only.  
 For the changed reference alter the marks on the brass  
 cap to read:



On same course, with continued measurement.

75.44 Wash, 15 lks. wide, course NW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 33 ins. in  
 the ground, for re-established cor. of secs. 19 and 30,  
 only, with brass cap marked




Dig pits, 18 ins. square by 12 ins. deep, one each NE.  
 and SE. of cor., 3 ft. dist.

Land: rolling and level.  
 Soil: clay loam, gravelly, 2nd rate.  
 Timber: palo verde and ironwood.  
 Undergrowth: mesquite, greasewood, sage.

N.0°02'W., on true line, on W. bdy. of sec. 19.  
 Over level land; thru scattering timber, undergrowth.  
 Along fence line, extends N. and S.

0.68 Intersect the cor. of secs. 19, 24, 25 and 30, which is an  
 iron post, 2 ins. diam., projecting 3 ins. above ground,  
 firmly set and properly marked on brass cap. No access-  
 ories.

This monument now refers to secs. 24 and 25, only. For the  
 changed reference alter the markings on the brass cap  
 to read:



Resurvey of Part of W. Boundary of T.6 S., R.10 E.

Chains

Thence N. 0° 06' W. on true line, with continued measurement. Over level land; through scattering undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for re-established  $\frac{1}{4}$  sec. cor. of sec. 19, only, with brass cap marked

$\frac{1}{4}$   
S19  
1930

Dig pits, 18 ins. square, 12 ins. deep, one each N. and S. of cor., 3 ft. dist.

40.74 Intersect the  $\frac{1}{4}$  sec. cor. of secs. 19 and 24, which is an iron post, 1 in. diam., projecting 4 ins. above ground firmly set and properly marked on brass cap, witnessed by a mound of stone, W. of cor.

This monument now refers to the quarters of sec. 24, only. For the changed reference alter the markings on the brass cap to read:

$\frac{1}{4}$   
S24  
1930  
1928

No change in accessory required.

Thence, North, on true line, with continued measurement.

40.99 Wash, 15 lks. wide, course W.

43.38 Wash, 25 lks. wide, course SW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 32 ins. in the ground, for re-established cor. of secs. 18 and 19, only, with brass cap marked

T6S  
R10E  
S18  
S24 | S19  
1930

Dig pits, 18 ins. square, 12 ins. deep, one each NE. and SE. of cor., 3 ft. dist.

Land: level.

Soil: clay loam, 1st and 2nd rate.

Timber palo verde and ironwood.

Undergrowth: mesquite, greasewood and sage.

North . . . on true line, on W. bdy. of sec. 18. Over level land; through scattering undergrowth.

0.80 Intersect the cor. of secs. 13, 18, 19 and 24, which is an iron post, projecting 4 ins. above ground, firmly set and properly marked on brass cap, witnessed by a mound of stone around post.

This monument now refers to secs. 13 and 24, only. For the changed reference alter the marks on the brass cap to read:

T6S  
R9E R10E  
S13 | S18  
S24 |  
1930  
1928

No change in accessory required.

## Resurvey of Part of W. Boundary of T.6 S., R.10 E.

Chains

Continue line and measurement. Continued measurement.

- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for re-established  $\frac{1}{4}$  sec. cor. of sec. 18, only, with brass cap marked

$$\begin{array}{c} \frac{1}{4} \\ | \\ S18 \\ 1930 \end{array}$$

Dig pits, 18 ins. square, 12 ins. deep, one each N. and S. of cor., 3 ft. dist.

- 40.86 Intersect the  $\frac{1}{4}$  sec. cor. of secs. 13 and 18, which is an iron post, 1 in. diam.; projecting 4 ins. above ground, firmly set and properly marked on brass cap, witnessed by a mound of stone around post.

This monument now refers to the quarters of sec. 13, only. For the changed reference alter the marks on the brass cap to read:

$$\begin{array}{c} \frac{1}{4} \\ | \\ S13 \\ 1930 \\ 1928 \end{array}$$

No change in accessory required.

- 62.00 Wash, 15 lks. wide, course NW.

- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for re-established cor. of secs. 7 and 18, only, with brass cap marked

$$\begin{array}{c} T6S \\ R10E \\ \hline S7 \\ S18 \\ \hline S13 \\ 1930 \end{array}$$

Dig pits, 18 ins. square, 12 ins. deep, one each NE. and SE. of cor., 3 ft. dist.

Land: level.

Soil: clay loam, 1st and 2nd rate.

Timber: none.

Undergrowth: mesquite, sage, greasewood.

North, on true line, on W. bdy. of sec. 7:

Over level land; through scattering undergrowth.

- 0.92 Intersect the cor. of secs. 7, 12, 13 and 18, which is an iron post, 2 ins. diam., projecting 4 ins. above ground, firmly set and properly marked on brass cap, witnessed by a mound of stone, W. of cor.

This monument now refers to secs. 12 and 13, only. For the changed reference alter the marks on the brass cap to read:

$$\begin{array}{c} T6S \\ R9E R10E \\ \hline S12 S7 \\ S13 \\ \hline 1930 \\ 1928 \end{array}$$



Resurvey of Part of West Boundary of T.6 S., R.10 E.

Chains

No change in accessory required.

Continue line and measurement.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for re-established  $\frac{1}{4}$  sec. cor. of sec. 7 only, with brass cap marked



1930

Dig pits 18 ins. square, 12 ins. deep, one each N. and S. of cor., 3 ft. dist.

40.98

Intersect the  $\frac{1}{4}$  sec. cor. of secs. 7 and 12, which is an iron post, 1 in. diam., projecting 4 ins. above ground, firmly set, properly marked on brass cap, and witnessed by a mound of stone W. of cor. This cor. monument now refers to the quarters of sec. 12 only. For the changed reference alter the marks on the brass cap to read



1930

No change in accessory required.


Continue line and measurement.

43.88

Wash, 15 lks. wide, course NW.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for re-established cor. of secs. 6 and 7 only, with brass cap marked.



1930

Dig pits 18 ins. square, 12 ins. deep, one each NE. and SE. of cor., 3 ft. dist.

A cabin bears S. 28° E., about 18 chs. dist.

Land, level.

Soil, clay loam, 1st and 2nd rate.

Timber, none.

Undergrowth, mesquite, sage, and greasewood.

North, on true line, on W. bdy. of sec. 6 (S.g)  
Over level land, thru scattering undergrowth.

0.53

Intersect the cor. of secs. 1, 6, 7 and 12, which is an iron post, 2 ins. diam., projecting 4 ins. above ground, firmly set, properly marked on brass cap, and witnessed by a mound of stone W. of cor.

This cor. monument now refers to secs. 1 and 12 only. For the changed reference alter the marks on the brass cap to read

Resurvey of Part of West Boundary of T.6 S., R.10 E.

Chains

T 6 S  
R9E | R10E  
S 1 | S 6  
S12 |

1930  
1928

No change in accessory required.

40.08 Intersect the  $\frac{1}{4}$  sec. cor. of secs. 1 and 6, which is an iron post, 1 in. diam., projecting 6 ins. above ground, firmly set, properly marked on brass cap, and witnessed by a mound of stone W. of cor. This cor. monument retains its original common reference to the quarters of secs. 1 and 6, therefore no alteration of same is made.

Land, level.  
Soil, clay loam, 1st rate.  
Timber, none.  
Undergrowth, mesquite, sage, and greasewood.

BOUNDARIES of TOWNSHIP 6 SOUTH; RANGE 10 EAST

Latitudes, departures and closing errors.

Line designated	True Course	Dist- ance	Latitudes		Departures	
			N.	S.	E.	W.
South Boundary	S.89°59'W.	470.29		114		470.29
West Boundary	North	40.05	40.05			
	N.0° 6'E.	40.39	40.39		.07	
	N.0° 2'W.	80.24	80.24			.05
	N.0° 6'W.	40.06	40.06			.07
	North	318.05	318.05			
North Boundary (1st Std. Par. S.)	N.89°32'E.	29.37	.24		29.37	
	East	80.00			80.00	
	S.89°59'E.	40.19		.01	40.19	
	S.89°58'E.	160.74		.09	160.74	
	S.89°56'E.	40.10		.05	40.10	
	East	80.00			80.00	
	North	6.14	6.14			
	East	39.37			39.37	
East Boundary	South	525.34		525.34		
Convergency					.50	
Totals			525.17	525.63	470.34	470.41
				525.17		470.34
Error in latitude			0.46			
Error in departure					0.07	

Chains

From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., which is an iron post, 2 ins. diam., projecting 10 ins. above ground, firmly set, with brass cap properly marked, dated 1919, with remains of witness pits and bearing tree in SW. quadrant.

N.0°01'W., on true line, bet. secs. 35 and 36.  
Over level ground; thru dense undergrowth.

- 8.40 Wash, 2 lks. wide, 2 ft. deep, course W.
- 15.30 Wash, 20 lks. wide, 3 ft. deep, course W.

- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked



Dig pits, 18 ins. square, 12 ins. deep, N. and S. of cor.

- 44.50 Wash,  $\frac{3}{5}$  ft. dist., 5 lks. wide, 3 ft. deep, course W.
- 55.50 Wash, 5 lks. wide, 3 ft. deep, course irregular W.
- 67.70 Wash, 15 lks. wide, 2 ft. deep, course SW.

- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, with brass cap marked



Dig pits, 18 ins. square, 12 ins. deep, one in each sec.  $\frac{3}{5}$  ft. dist.

Land: level.  
 Soil: adobe loam, 1st rate.  
 Timber: none.  
 Undergrowth: palo verde, mesquite, ironwood, cactus, sage.


East, on random line, bet. secs. 25 and 36.

- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
- 80.00 Fall 4 lks. N. of the cor. of secs. 25 and 36, only, on the E. bdy. of the Tp., which is an iron post, 3 ft. long, projecting 10 ins. above ground, firmly set, properly marked on brass cap, dated 1919, with dim evidence of witness pits.

Thence  
N.89°58'W., on true line, bet. secs. 25 and 36.  
Over level land; through dense undergrowth.

- 5.40 Wash, 10 lks. wide, 3 ft. deep, course SW.
- 10.80 Wash, 15 lks. wide, 1 ft. deep, course SW.

- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked



Dig pit, 18 ins. square, 12 ins. deep, one each E. and W. of cor.,  $\frac{3}{5}$  ft. dist.

- 80.00 The cor. of secs. 25, 26, 35 and 36.

Land: level.  
 Soil: adobe loam, 1st rate.

BOOK 3924

10

## Survey of Subdivisions of T.6 S., R.10 E.

Chains

Timber: none.

Undergrowth: palo verde, mesquite, ironwood, sage, greasewood, cactus.

N.0°01'W., on true line, bet. secs. 25 and 26.

Over level land; through dense undergrowth.

17.60 Wash, 15 lks. wide, 2 ft. deep, course SW.

31.40 Wash, 10 lks. wide, 2 ft. deep, course S.65°W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked
$$\begin{array}{r} \frac{1}{4} \\ S26 \end{array} | \begin{array}{r} \frac{1}{4} \\ S25 \end{array}$$
 1930

Dig pits, 18 ins. square, 12 ins. deep, one each N. and S. of cor.

49.80 Wash, 15 lks. wide, 2 ft. deep, course W.

61.60 Wash, 15 lks. wide, 2 ft. deep, course SW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 23, 24, 25, and 26, with brass cap marked

$$\begin{array}{r} T6SR10E \\ S23 | S24 \\ S26 | S25 \\ 1930 \end{array}$$

from which

A mesquite, 8 ins. diam., bears N.87°E., 70 lks. dist., marked T6S R10E S24 BT.

Dig pits, 18 ins. square, 12 ins. deep, one each, NE., SE., SW. and NW. of cor., 3 ft. dist.

Land: level.

Soil: adobe and sandy loam, 1st rate.

Timber: none.

Undergrowth: palo verde, mesquite, catclaw, ironwood, greasewood, sage, cactus.

S.89°58'E., on random line, bet. secs. 24 and 25.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.01 Fall 16 lks. N. of the cor. of secs. 24 and 25, only, on the E. bdy. of the Tp., which is an iron post, 2 ins. diam., projecting 10 ins. above ground, firmly set, properly marked on brass cap, with dim remains of witness pits.

Thence

N.89°51'W., on true line, bet. secs. 24 and 25.

Over level land; through dense undergrowth.

9.30 Dim, unused road, bears NE. and NW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked
$$\begin{array}{r} S24 \\ \frac{1}{4} S25 \\ 1930 \end{array}$$

from which

A mesquite, 8 ins. diam., bears S.29 $\frac{1}{2}$ °W., 55 lks. dist., marked  $\frac{1}{4}$  S25 BT.

Survey of Subdivisions of T.6 S., R.10 E.

BOOK 3924

Chains

A mesquite, 10 ins. diam., bears N.31 $\frac{1}{2}$ °W., 290 lks. dist., marked  $\frac{1}{4}$  S24 BT.

45.00 Bend in large wash from SE. to SW. bears 10 lks. S.

56.00 Enter wash, 4 ft. deep, course N.70°W.

57.60 Leave same, course N.70°W.

80.01 The cor. of secs. 23, 24, 25 and 26.

Land: level.

Soil: adobe loam, 1st rate.

Timber: none.

Undergrowth: palo verde, mesquite, ironwood, cactus, greasewood, sage.

N.0°01'W., on true line, bet. secs. 23 and 24.

Over level land; through dense undergrowth.

0.00 Enter wash, 1 ft. deep, course W.


2.90 Leave same, course W.

6.20 Dim, unused road, bears NE. and SW.

17.50 Wash, 15 lks. wide, course NW.

36.20 Wash, 20 lks. wide, course NW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked




Dig pits, 18 ins. square, 12 ins. deep, one each N. and S. of cor.

57.80 Dim, unused road, bears E. and W.

73.40 Wash, 25 lks. wide, course SW.

79.70 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for witness cor. to cor. of secs. 13, 14, 23 and 24, with brass cap marked



from which

A catclaw, 3 ins. diam., bears N.30 $\frac{1}{2}$ °E., 53 lks. dist., marked BT.

A palo verde, 6 ins. diam., bears S.88°E., 59 lks. dist., marked T6S R10E S24 WC BT.

A mesquite, 4 ins. diam., bears S.79°W., 100 lks. dist., marked BT.

A palo verde, 6 ins. diam., bears N.23°W., 32 lks. dist., marked T6S R10E S14 WC BT.

80.00 True point for cor. of secs. 13, 14, 23 and 24 falls in wash, 4 lks. wide, 3 lks. deep, course S.70°W.

Land: level.

Soil: adobe loam, 1st rate.

Timber: none.

Undergrowth: palo verde, mesquite, catclaw, ironwood, greasewood, sage, cactus.

From true point for cor. of secs. 13, 14, 23 and 24, S.89°51'E., on random line, bet. secs. 13 and 24.

## Survey of Subdivisions of T.6 S., R.10 E.

## Chains

- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.88 Fall 14 lks. N. of the cor. of secs. 13 and 24, only, on the E. bdy. of the Tp., which is an iron post, 2 ins. diam., projecting 2 ins. above ground, firmly set, properly marked on brass cap, dated 1919.; no evidence of accessories.
- Thence  
 N.89°45'W., on true line, bet. secs. 13 and 24.  
 Over level land; through dense undergrowth.
- 28.30 Wash, 20 lks. wide, 2 ft. deep, course NW.
- 39.94 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked
- $\frac{1}{4}$  S13  
 S24  
 1930
- from which  
 A mesquite, 5 ins. diam., bears S.15°W., 11 lks. dist. marked  $\frac{1}{4}$  S24 BT.  
 A mesquite, 8 ins. diam., bears N.59°W., 96 lks. dist. marked  $\frac{1}{4}$  S13 BT.
- 50.80 Short highway drain ditch, 3 ft. deep, course SE.  
 54.37 Highway, bears S.38 $\frac{1}{2}$ °E. to Tucson and N.38 $\frac{1}{2}$ °W. to Florence.  
 73.50 Wash, 10 lks. wide, 2 ft. deep, course NW.
- 79.88 The true point for cor. of secs. 13, 14, 23 and 24.
- Land: level.  
 Soil: adobe loam, 1st rate.  
 Timber: none.  
 Undergrowth: palo verde, mesquite, ironwood, catclaw, cactus, sage, greasewood.
- From true point for cor. of secs. 13, 14, 23 and 24,  
 N.0°01'W., on true line, bet. secs. 13 and 14.  
 Over level land; through dense undergrowth.
- 13.20 Wash, 20 lks. wide, 1 ft. deep, course NW.  
 31.96 Highway, bears S.38 $\frac{1}{2}$ °E. to Tucson and N.38 $\frac{1}{2}$ °W. to Florence.  
 37.60 Wash, 10 lks. wide, course N.70°W.  
 38.70 Wash, 10 lks. wide, 2 ft. deep, course NW.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked
- $\frac{1}{4}$   
 S14 | S13  
 1930
- from which  
 A palo verde, 5 ins. diam., bears S.16 $\frac{1}{2}$ °W., 157 lks. dist., marked  $\frac{1}{4}$  S14 BT.  
 Dig pit, 18 ins. square, 12 ins. deep, one each N. and S. of cor., 3 ft. dist.
- 49.20 Wash, 10 lks. wide, course W.  
 51.10 Road, bears NW. and SE.  
 53.00 Cabin bears about 4 chs. W.  
 67.30 Wash, 10 lks. wide, course S.70°W.  
 72.10 Wash, 10 lks. wide, course S.05°W.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 11, 12, 13 and 14, with brass cap marked

Chains

T6SR10E	
S11	S12
S14	S13
1930	

Dig pit, 18 ins. square, 12 ins. deep, one in each sec., 3 ft. dist.

Land: level.

Soil: adobe and clay loam, 1st rate.

Timber: none.

Undergrowth: palo verde, mesquite, catclaw, cactus, sage, greasewood.

40.00 S.89°45'E., on random line, bet. secs. 12 and 13.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.04 Fall 2 lks. N. of the cor. of secs. 12 and 13, only, on the E. bdy. of the Tp., which is an iron post, 2 ins. diam., projecting 10 ins. above ground, firmly set and properly marked on brass cap, dated 1919, with dim remains of witness pits.

Thence  
 N.89°44'W., on true line, bet. secs. 12 and 13.  
 Over level land; through dense undergrowth.  
 23.80 Road, bears NW. and SE.  
 32.10 Wash, 10 lks. wide, course N.65°W.  
 38.70 Wash, 10 lks. wide, course NW.

40.02 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

S12
S13
1930

Dig pits, 18 ins. square, 12 ins. deep, one each N. and W. of cor.

55.20 Wash, 30 lks. wide, course NW.  
 80.04 The cor. of secs. 11, 12, 13 and 14.

Land: level.

Soil: adobe loam, 1st rate.

Timber: none.

Undergrowth: palo verde, mesquite, catclaw, cactus, greasewood, sage.

N.0°01'W., on true line, bet. secs. 11 and 12.  
 Over level land; through dense undergrowth.  
 11.00 Wash, 20 lks. wide, course NW.  
 11.70 Branch of same wash, course W.  
 23.60 Wash, 15 lks. wide, course W.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

S11	S12
1930	

Dig pits, 18 ins. square, 12 ins. deep, one each N. and S. of cor.

43.80 Wash, 20 lks. wide, course NW.  
 45.50 Old road, bears E. and E.

## Survey of Subdivisions of T.6 S., R.10 E.

Chains

54.50 Wash, 10 lks. wide, course NW.

58.30 Wash, 20 lks. wide, course NW.

77.70 Wash, 5 lks. wide, course W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 1, 2, 11 and 12, with brass cap marked

T6S R10E

S2 | S1

S11 | S12

1930

Dig pits, 18 ins. square, 12 ins. deep, one in each sec. 3, ft. dist.

Land: level.

Soil: adobe loam, 1st rate.

Timber: none.

Undergrowth: palo verde, mesquite, catclaw, cactus, greasewood, sage.

40.00 S.89°44'E., on random line, bet. secs. 1 and 12.  
Set temp.  $\frac{1}{4}$  sec. cor.

79.90 Fall 1 lk. N. of the cor. of secs. 1 and 12, only, on the E. bdy. of the Tp., which is an iron post, 2 ins. diam., projecting, 12 ins. above ground, firmly set and properly marked on brass cap, dated 1919, with dim evidence of witness pits.

Thence

N.89°44'W., on true line, bet. secs. 1 and 12.

Over level land; through moderate undergrowth.

5.60 Wash, 10 lks. wide, course S.65°W.

22.10 Wash, 5 lks. wide, course NW.

39.95 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked $\frac{1}{4}$  S1

S12

1930

Dig pit, 18 ins. square, 12 ins. deep, one each E. and W. of cor.

79.90 The cor. of secs. 1, 2, 11 and 12.

Land: level.

Soil: adobe loam, 1st rate.

Timber: palo verde, cactus, catclaw, mesquite, sage, greasewood.

N.0°01'W., on true line, bet. secs. 1 and 2.

Over level land; through dense undergrowth.

4.60 Wash, 15 lks. wide, course S, 70°W.

39.40 Wash, 10 lks. wide, course W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked $\frac{1}{4}$  S2 | S1

1930




Chains

from which  
 A palo verde, 8 ins. diam., bears S.36°E., 82 lks.  
 dist., marked  $\frac{1}{4}$  S1 BT.  
 A mesquite, 8 ins. diam., bears S.4 $\frac{1}{4}$ °W., 72 lks.  
 dist., marked  $\frac{1}{4}$  S2 BT.

- 46.10 Wash, 5 lks. wide, course NW.
- 67.60 Wash, 10 lks. wide, course S.75°W.
- 69.70 Wash, 10 lks. wide, course W.
- 88.00 Wash, 10 lks. wide, course N.60°W.

118.81 Intersect the 1st. Standard Parallel, South, at a point 57 lks. West of the standard  $\frac{1}{4}$  sec. cor. of sec. 36, which is an ironwood post, 4 ins. square, projecting 18 ins. above ground, firmly set, marked SC  $\frac{1}{4}$  S36 on N. face, with remains of witness pits E. and W. of cor.  
 At point of intersection,  
 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for closing cor. of secs. 1 and 2, with brass cap marked




Dig pits, 18 ins. square, 12 ins. deep, one each SE. and SW. of cor.

Land: level.  
 Soil: adobe loam, 1st rate.  
 Timber: none.  
 Undergrowth: palo verde, catclaw, mesquite, cactus, ironwood, sage, greasewood.

from the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tn., which is an iron post, 2 ins. diam., projecting 10 ins. above ground, firmly set, properly marked on brass cap, dated 1919, with dim remains of witness pits. N.0°01'W., on true line, bet. secs. 34 and 35.  
 Over level land; through moderate undergrowth.

- 10.30 Wash, 10 lks. wide, course NW.
- 20.40 Wash, 15 lks. wide, course N.70°W.
- 27.70 Wash, 20 lks. wide, course NW.
- 29.80 Old, unused road, bears NNW. and SSE.


40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked



Dig pits, 18 ins. square, 12 ins. deep, N. and S. of cor., 3 ft. dist.

- 41.20 Wash, 10 lks. wide, 2 ft. deep, course NW.
- 64.00 Wash, 15 lks. wide, 4 ft. deep, course NW.
- 75.30 Wash, 10 lks. wide, 2 ft. deep, course W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 26, 27, 34 and 35, with brass cap marked



## Survey of Subdivisions of T.6 S., R.10 E.

Chains

T6SR10E	
S27	S26
S34	S35
1930	

from which  
 A mesquite, 6 ins. diam., bears N.12 $\frac{1}{2}$ °E., 200 lks.  
 dist., marked T6S R10E S26 BT.  
 A mesquite, 6 ins. diam., bears N.89°E., 76 lks.  
 dist., marked T6S R10E S26 BT.  
 Dig pits, 18 ins. square, 12 ins. deep, one in each  
 sec., 3' ft. dist.

Land: level.  
 Soil: adobe loam, 1st rate.  
 Timber: none.  
 Undergrowth: palo verde, catclaw, cactus, mesquite,  
 ironwood, greasewood.

East, on random line, bet. secs. 26 and 35.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.00 Fall 2 lks. S. of the cor. of secs. 25, 26, 35 and 36.  
 Thence  
 S.89°59'W., on true line, bet. secs. 26 and 35.  
 Over level land; through dense undergrowth.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$ S26	
$\frac{1}{4}$ S35	
1930	

from which  
 A palo verde, 6 ins. diam., bears S.40°W., 9 lks.  
 dist., marked  $\frac{1}{4}$  S35 BT.  
 A mesquite, 6 ins. diam., bears N.13 $\frac{1}{2}$ °W., 147 lks.  
 dist., marked  $\frac{1}{4}$  S26 BT.

41.90 Wash, 10 lks. wide, course NW.  
 80.00 The cor. of secs. 26, 27, 34 and 35.

Land: level.  
 Soil: adobe loam, 1st rate.  
 Timber: none.  
 Undergrowth: palo verde, catclaw, cactus, mesquite,  
 ironwood, greasewood.

N.0°01'W., on true line, bet. secs. 26 and 27.  
 Over level land; through moderate undergrowth.  
 4.20 Wash, 20 lks. wide, course, S.70°W.  
 12.00 Wash, 5 lks. wide, course S.70°W.  
 33.20 Enter wash, 3 ft. deep, course W.  
 33.90 Leave same.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

S27	
S26	
1930	

Survey of Subdivisions of T.6 S., R.10 E.

Chains	Dig pits, 18 ins. square, 12 ins. deep, N. and S. of cor.						
55.30	Wash, 30 lks. wide, 2 ft. deep, course S.75°W.						
66.10	Wash, 30 lks. wide, 4 ft. deep, course N.70°W.						
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 22, 23, 26 and 27, with brass cap marked						
	<table border="1"> <tr><td>T6S</td><td>R10E</td></tr> <tr><td>S22</td><td>S23</td></tr> <tr><td>S27</td><td>S26</td></tr> </table> <p>1930</p>	T6S	R10E	S22	S23	S27	S26
T6S	R10E						
S22	S23						
S27	S26						
	Dig pits, 18 ins. square, 12 ins. deep, one in each sec., 3 ft. dist.						
	Land: level.						
	Soil: adobe loam, 1st rate.						
	Timber: none.						
	Undergrowth: palo verde, cactus, catclaw, mesquite, greasewood, ironwood.						
-----							
	N.89°55'W., on random line, bet. secs. 23 and 26.						
40.00	Set temp. $\frac{1}{4}$ sec. cor.						
80.14	Fall 9 lks. S. of the cor. of secs. 23, 24, 25 and 26. Thence						
	S.89°55'W., on true line, bet. secs. 23 and 26.						
	Over level land; through moderate undergrowth.						
14.30	Wash, 40 lks. wide, 1 ft. deep, course SW.						
40.07	Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap marked						
	<table border="1"> <tr><td>S23</td></tr> <tr><td>S26</td></tr> </table> <p>1930</p>	S23	S26				
S23							
S26							
	Dig pits, 18 ins. square, 12 ins. deep, E. and W. of cor.						
80.14	The cor. of secs. 22, 23, 26 and 27.						
	Land: level.						
	Soil: adobe loam, 1st rate.						
	Timber: none.						
	Undergrowth: palo verde, cactus, greasewood, mesquite, ironwood.						
-----							
	N.0°01'W., on true line, bet. secs. 22 and 23.						
	Over level land; through moderate undergrowth.						
18.90	Wash, 30 lks. wide, 5 ft. deep, course						
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked						
	<table border="1"> <tr><td>S22</td><td>S23</td></tr> </table> <p>1930</p>	S22	S23				
S22	S23						
	Dig pits, 18 ins. square, 12 ins. deep, N. and S. of cor.						
43.90	Wash, 15 lks. wide, course NW.						
61.80	Wash, 50 lks. wide, 1 ft. deep, course NW.						
65.50	Enter wash, 1 ft. deep, course S.15°W.						
67.70	Leave same.						

Survey of Subdivisions of T.6 S., R.10 E.

Chains

74.10 Wash, 5 lks. wide, course W.

80.00 Set an iron post, 5 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 14, 15, 22 and 23, with brass cap marked

T6SR10E  
 $\frac{S15}{S22} | \frac{S14}{S23}$   
 1930

from which  
 A palo verde, 6 ins. diam., bears N.32 $\frac{1}{2}$ °E., 27 lks. dist., marked T6S R10E S14 BT.  
 A palo verde, 6 ins. diam., bears N.38 $\frac{1}{2}$ °W., 161 lks. dist., marked T6S R10E S15 BT.  
 Dig pits, 18 ins. square, 1 ft. deep, one in each sec., 3 ft. dist.  
  
 Land: level.  
 Soil: adobe loam, 1st rate.  
 Timber: none.  
 Undergrowth: palo verde, mesquite, greasewood, ironwood, sage, catclaw, cactus.

40.00 N.89°55'E., on random line, bet. secs. 14 and 23.  
 Set temp.  $\frac{1}{4}$  sec. cor.

80.09 Fall 9 lks. N. of the true point for cor. of secs. 13, 14, 23 and 24.

Thence  
 S.89°59'W., on true line, bet. secs. 14 and 23.  
 Over level land; through moderate undergrowth.

7.20 Wash, 20 lks. wide, course NW.  
 16.80 Wash, 10 lks. wide, course SW.

40.04 Set an iron post, 5 ft. long, 1 in. diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4} \frac{S14}{S23}$   
 1930

Dig pits, 18 ins. square, 1 ft. deep, E. and W. of cor.

80.09 The cor. of secs. 14, 15, 22 and 23.

Land: level.  
 Soil: adobe loam, 1st rate.  
 Timber: none.  
 Undergrowth: palo verde, mesquite, ironwood, sage, greasewood.

12.30 N.0°01'W., on true line, bet. secs. 14 and 15.  
 Over level land; through moderate undergrowth.  
 Wash, 10 lks. wide, course N.75°W.  
 19.90 Wash, 5 lks. wide, course W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4} \frac{S15}{S14}$   
 1930

from which

Survey of Subdivision of T.6 S., R.10 E.

Chains  
 A palo verde, 8 ins. diam., bears N.2°E., 230 lks. dist.,  
 marked  $\frac{1}{4}$  S14 BT.  
 Dig pits, 18 ins. square, 1 ft. deep, N. and S. of cor.

42.40 Wash, 15 lks. wide, course N.60°W.  
 57.60 Wash, 5 lks. wide, course S.75°W.  
 78.20 Wash, 10 lks. wide, course N.65°W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 33 ins. in the  
 ground, for cor. of secs. 10, 11, 14 and 15, with brass  
 cap marked

T6SR10E  
 S10 | S11  
 S15 | S14  
 1930

from which  
 A mesquite, 6 ins. diam., bears S.30 $\frac{1}{2}$ °W., 148 lks.  
 dist., marked T6S R10E S15 BT.  
 Dig pits, 18 ins. square, 1 ft. deep, one in each sec.  
 3 ft. dist.

Land: level.  
 Soil: adobe loam, 1st rate.  
 Timber: none.  
 Undergrowth: palo verde, mesquite, ironwood, sage,  
 greasewood.

N.89°59'E., on random line, bet. secs. 11 and 14.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.03 Fall 9 lks. S. of the cor. of secs. 11, 12, 13 and 14.  
 Thence

S.89°55'W., on true line, bet. secs. 11 and 14.  
 Over level land; through moderate undergrowth.

26.00 Wash, 20 lks. wide, course NW.

38.67 Highway, bears S.38 $\frac{1}{2}$ °E. to Tucson and N.38 $\frac{1}{2}$ °W. to Florence.

40.01 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$ S11  
 $\frac{1}{4}$ S14  
 1930

from which  
 A palo verde, 8 ins. diam., bears N.53°E., 11 lks. dist.,  
 marked  $\frac{1}{4}$  S11 BT.  
 A mesquite, 5 ins. diam., bears S.39°E., 152 lks. dist.,  
 marked  $\frac{1}{4}$  S14 BT.

55.30 Wash, 5 lks. wide, course NW.

80.03 The cor. of secs. 10, 11, 14 and 15.

Land: level.  
 Soil: adobe loam, 1st rate.  
 Timber: none.  
 Undergrowth: palo verde, mesquite, sage, greasewood,  
 ironwood, cactus.

N.0°01'W., on true line, bet. secs. 10 and 11.  
 Over level land; through moderate undergrowth.

16.70 Wash, 30 lks. wide, 4 ft. deep, course NW. Wash from E.  
 joins 50 lks. E.

25.50 Wood road, bears E. and W.

## Survey of Subdivisions of T.6 S., R.10 E.

## Chains

- 30.50 Wash, 5 lks. wide, course N.70°W.  
 34.60 Wash, 5 lks. wide, course NW.  
 38.30 Cabin bears about 1.50 chs. E.  
 39.95 Wash, 3 lks. wide, course N.

- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
 S10 | S11  
 1930

from which

- A palo verde, 6 ins. diam., bears S.84°E., 76 lks. dist., marked  $\frac{1}{4}$  S11 BT.  
 A mesquite, 8 ins. diam., bears S.73°W., 75 lks. dist., marked  $\frac{1}{4}$  S10 BT.
- 48.50 Wood road, bears E. and W.  
 51.32 Highway, bears N.38 $\frac{1}{2}$ °W. to Florence and S.38 $\frac{1}{4}$ °E. to Tucson.  
 Wash, 30 lks. wide, crosses highway to SW. here.  
 53.60 Short side roads bear SE. and SW.  
 55.90 Short side road bears SE. and NW.  
 59.60 Wash, 20 lks. wide, course NW.  
 72.40 Wash, 5 lks. wide, course NW.

- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 2, 3, 10 and 11, with brass cap marked

T6SR10E  
 S3 | S2  
 S10 | S11  
 1930

from which

- A mesquite, 6 ins. diam., bears S.3°W., 193 lks. dist., marked T6S R10E S10 BT.  
 A mesquite, 8 ins. diam., bears N.10°W., 72 lks. dist., marked T6S R10E S3 BT.  
 Dig pits, 18 ins. square, 1 ft. deep, one in each sec. 3 ft. dist.

Land: level.

Soil: adobe loam, 1st rate.

Timber: none.

Undergrowth: palo verde, cactus, mesquite, greasewood, sage.

- N.89°55'E., on random line, bet. secs. 2 and 11.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.12 Fall 2 lks. N. of the cor. of secs. 1, 2, 11 and 12.  
 Thence  
 S.89°56'W., on true line, bet. secs. 2 and 11.  
 Over level land; through moderate undergrowth.  
 25.40 Wash, 15 lks. wide, course N.15°W.

- 40.06 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$ S2  
 $\frac{1}{4}$ S11  
 1930

- Dig pits, 18 ins. square, 1 ft. deep, E. and W. of cor.  
 80.12 The cor. of secs. 2, 3, 10 and 11.

Survey of subdivisions of T.6 S., R.10 E.

BOOK 3924

Chains

Land: level.  
Soil: adobe loam, 1st rate.  
Timber: none.  
Undergrowth: palo verde, cactus, mesquite, ironwood, greasewood, sage.

N.0°01'W., on true line, bet. secs. 2 and 3.  
Over level land; through scattering undergrowth.

- 4.70 Wash, 5 lks. wide, course SW.
- 25.50 Wash, 15 lks. wide, course W.
- 36.20 Wash, 15 lks. wide, course S.75°W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor., with brass cap marked



Dig pits, 18 ins. square, 1 ft. deep, N. and S. of cor.

- 49.70 Wash, 10 lks. wide, from E., course SW.
- 64.90 Dim road, bears NW. and SE.
- 69.40 Wash, 10 lks. wide, course S.60°W.
- 78.70 Wash, 20 lks. wide, 2 ft. deep, course West.
- 82.90 Dim road, bears NW. and SE.
- 92.90 Wash, 10 lks. wide, course W.
- 93.30 Branch of same wash, 5 lks. wide, course SW.
- 115.30 Dim road, bears E. and W.
- 116.30 Wash, 20 lks. wide, course N.65°W.

118.87 Intersect the 1st. St. Par. S., at a point 47 lks. N.89° 58' W. of the standard 1/4 sec. cor. of sec. 35, which is a wood post, 4 ins. diam., projecting 18 ins. above ground, firmly set, marked 1/4 SC S35 on N. face, with remains of witness pits E. and W. of cor.

At point of intersection,  
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for closing cor. of secs. 2 and 3, with brass cap marked



Dig pits, 18 ins. square, 1 ft. deep, SE. and SW. of cor.

Land: level.  
Soil: adobe loam, 1st rate.  
Timber: palo verde, cactus, mesquite, greasewood, sage, etc.

From the cor. of secs. 3, 4, 35 and 34, on the S. bdy. of the Tp., which is an iron post, 2 ins. diam., projecting 10 ins. above ground, firmly set, properly marked on brass cap, dated 1919, witnessed by three palo verde bearing trees and a set of pits.  
N.0°02'W., on true line, bet. secs. 33 and 34.

- 13.20 Wash, 10 lks. wide, 2 ft. deep, course NW.
- 38.30 Wash, 15 lks. wide, 2 ft. deep, course NW.

Survey of Subdivisions of T.6 S., R.10 E.

Chains

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

S33 | S34  
1930

Dig pits, 18 ins. square, 1 ft. deep, N. and S. of cor.

42.60 Wash, 5 lks. wide, course SW.

43.30 Wash, 5 lks. wide, course NW.

60.88 Old road, bears NW. and SE.

66.90 Wash, 10 lks. wide, 2 ft. deep, course N.65°W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 27, 28, 33 and 34, with brass cap marked

T6SR10E  
S28 | S27  
S33 | S34  
1930

from which  
A palo verde, 8 ins. diam., bears N.85°W., 63 lks. dist., marked T6S R10E S28 BT.  
A mesquite, 6 ins. diam., bears N.23°W., 85 lks. dist., marked T6S R10E S28 BT.  
Dig pits, 18 ins. square, 1 ft. deep, one in each sec., 3 ft. dist.

Land: level.  
Soil: adobe loam, 1st rate.  
Timber: none.  
Undergrowth: palo verde, cactus, greasewood, sage.

East, on random line, bet. secs. 27 and 34.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.00 Fall 2 lks. S. of the cor. of secs. 26, 27, 34 and 35. Thence

S .89°59'W., on true line, bet. secs. 27 and 34.

Over level land; through moderate undergrowth.

2.60 Wash, 5 lks. wide, course NW.

10.40 Enter wash, 25 lks. wide, 3 ft. deep, course N.70°W.

12.20 Leave same, course S.80°W.

14.25 Same wash, course NW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

S27  
S34  
1930

Dig pits, 18 ins. square, 1 ft. deep, E. and W. of cor.

65.00 Wash, 10 lks. wide, course NW.

80.00 The cor. of secs. 27, 28, 33 and 34.

Land: level.  
Soil: adobe loam, 1st rate.  
Timber: none.  
Undergrowth: palo verde, cactus, greasewood, sage, mesquite.



Survey of Subdivisions of T.6 S., R.10 E.

Chains

N.0°02'W., on true line, bet. secs. 27 and 28.  
 Over level land: through scattering undergrowth.  
 17.40 Wash, 25 lks. wide, 2 ft. deep, course S.65°W.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
 S28 | S27  
 1930

Dig pits, 18 ins. square, 1 ft. deep, N. and S. of cor.

41.00 Wash, 10 lks. wide, 3 ft. deep, course N.70°W.  
 46.30 Wash, 5 lks. wide, course SW.  
 55.65 Wash, 20 lks. wide, 1 ft. deep, course W.  
 70.10 Dim road, bears NE. and SW.  
 77.40 Road, bears NW. and SE.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the  
 ground, for cor. of secs. 21, 22, 27 and 28, with brass  
 cap marked

T6S R10E  
 S21 | S22  
 S28 | S27  
 1930

from which  
 A mesquite, 8 ins. diam., bears  $0\frac{1}{4}$ °E., 261 lks. dist.,  
 marked T6S R10E S22 BT.  
 A mesquite, 8 ins. diam., bears N.3°W., 282 lks. dist.,  
 marked T6S R10E S21 BT.  
 Dig pits, 18 ins. square, 1 ft. deep, one in each  
 sec., 3 ft. dist.

Land: level.  
 Soil: adobe loam, 1st rate.  
 Timber: none.  
 Undergrowth: palo verde, mesquite, greasewood, sage.

N.89°59'E., on random line, bet. secs. 22 and 27.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.94 Fall 4 lks. S. of the cor. of secs. 22, 23, 26 and 27.  
 Thence  
 S.89°57'W., on true line, bet. secs. 22 and 27.  
 Over level land; through scattering undergrowth.  
 39.97 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$  S22  
 S27  
 1930

Dig pits, 18 ins. square, 1 ft. deep, E. and W. of cor.

41.40 Wash, 5 lks. wide, 3 ft. deep, course SW. along same.  
 43.45 Leave wash.  
 44.60 Same wash, course NW.  
 50.00 House bears about 9 chs. S.  
 50.30 Wash, 15 lks. wide, 4 ft. deep, course NW.  
 64.50 Wash, 10 lks. wide, course NW.  
 79.94 The cor. of secs. 21, 22, 27 and 28.

Survey of Subdivisions of T.6 S., R.10 E.

Chains

Land: level.  
 Soil: adobe loam, 1st rate.  
 Timber: none. <sup>very</sup> mesquite, greasewood, sage.  
 Undergrowth: palo verde, mesquite, greasewood, sage,  
 cactus.

N.0°02'W., on true line, bet. secs. 21 and 22.  
 Over level land; through scattering undergrowth.

3.70 Wash, 5 lks. wide, course N.70°W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

S21 | S22  
 1930

Dig pits, 18 ins. square, 1 ft. deep, N. and S. of cor.

63.80 Wash, 30 lks. wide, 2 ft. deep, course NW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the  
 ground, for cor. of secs. 15, 16, 21 and 22, with brass  
 cap marked

T6SR10E  
 S16 | S15  
 S21 | S22  
 1930

Dig pits, 18 ins. square, 1 ft. deep, one in each sec.  
 3 ft. dist.

Land: level.  
 Soil: adobe loam, 1st rate.  
 Timber: none.  
 Undergrowth: palo verde, mesquite, sage, greasewood.

N.89°57'E., on random line, bet. secs. 15 and 22.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.91 Fall 4 lks. N. of the cor. of secs. 14, 15, 22 and 23.

Thence  
 S.89°59'W., on true line, bet. secs. 15 and 22.

Over level land; through moderate undergrowth.

39.95 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

S15  
 $\frac{1}{4}$ S22  
 1930

Dig pits, 18 ins. square, 1 ft. deep, E. and W. of cor.

79.91 The cor. of secs. 15, 16, 21 and 22.

Land: level.  
 Soil: adobe loam, 1st rate.  
 Timber: none.  
 Undergrowth: palo verde, greasewood, mesquite.

Chains

17.80 N.0°02'W., on true line, bet. secs. 15 and 16.  
Over level land; through scattering undergrowth.  
Wash, 10 lks. wide, course NW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\begin{array}{c} \uparrow \\ S16 \quad | \quad S15 \\ 1930 \end{array}$

from which  
 A mesquite, 6 ins. diam., bears N.30°E., 102 lks. dist., marked  $\frac{1}{4}$  S15 BT.  
 A mesquite, 10 ins. diam., bears N.14°W., 140 lks. dist., marked  $\frac{1}{4}$  S16 BT.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 9,10,15 and 16, with brass cap marked

$\begin{array}{c} T6SR10E \\ S19 \quad | \quad S10 \\ S16 \quad | \quad S15 \\ 1930 \end{array}$

from which  
 A mesquite, 3 ins. diam., bears N.80 $\frac{1}{2}$ °E., 92 lks. dist., marked BT.  
 A mesquite, 8 ins. diam., bears S.50°E., 110 lks. dist., marked  $\frac{1}{4}$  S19 BT.  
 A mesquite, 3 ins. diam., bears N.11 $\frac{1}{4}$ °W., 106 lks. dist., marked BT.  
 Dig pits, 18 ins. square, 1 ft. deep, one in each sec., 3 ft. dist.

Land: level.  
 Soil: adobe loam, 1st. rate.  
 Timber: none.  
 Undergrowth: palo verde, cactus, mesquite, sage.

---

40.00 N.89°59'E., on random line, bet. secs. 10 and 15.  
Set temp.  $\frac{1}{4}$  sec. cor.

79.81 Fall 7 lks. S. of the cor. of secs. 10,11,14 and 15.  
Thence  
S.89°56'W., on true line, bet. secs. 10 and 15.  
Over level land; through moderate undergrowth.

4.20 Wash, 5 lks. wide, course W., from SW.

7.60 Junction of same with wash from SE., course NW.

39.90 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\begin{array}{c} S10 \\ \frac{1}{4} S15 \\ 1930 \end{array}$

from which  
 A palo verde, 6 ins. diam., bears N.16 $\frac{1}{2}$ °E., 132 lks. dist., marked  $\frac{1}{4}$  S10 BT.  
 A palo verde, 6 ins. diam., bears S.47°E., 25 lks. dist., marked  $\frac{1}{4}$  S15 BT.

79.81 The cor. of secs. 9,10,15 and 16.

Survey of Subdivisions of T.6 S., R.10 E.

chains

Land: level.  
Soil: adobe loam, 1st rate.  
Timber: none.  
Undergrowth: palo verde, mesquite, greasewood, cactus, sage.

N.0°02'W., on true line, bet. secs. 9 and 10.  
Over level land; through scattering undergrowth.

- 3.00 Wash, 5 lks. wide, course NW.
- 13.80 Wash, 5 lks. wide, course N.65°W.
- 14.50 Wash, 10 lks. wide, course W.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
S9 | S10  
1930

Dig pits, 18 ins. square, 1 ft. deep, N. and S. of cor.

- 71.60 Wash, 10 lks. wide, course W.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 3, 4, 9 and 10, with brass cap marked

T6SR10E  
S4 | S3  
S9 | S10  
1930

Dig pits, 18 ins. square, 1 ft. deep, one in each sec., 3 ft. dist.

Land: level.  
Soil: adobe loam, 1st rate.  
Timber: none.  
Undergrowth: greasewood, cactus, palo verde, sage, mesquite.

- 40.00 N.89°56'E., on random line, bet. secs. 3 and 10.
- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
- 79.80 Fall 7 lks. N. of the cor. of secs. 2, 3, 10 and 11.  
Thence
- S.89°59'W., on true line, bet. secs. 3 and 10.
- Over level land; through moderate undergrowth.
- 22.81 Highway, bears N.38 $\frac{1}{2}$ °W. to Florence and S.38 $\frac{1}{2}$ °E. to Tucson.
- 39.90 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$ S3  
S10  
1930

Dig pits 18 ins. square, 1 ft. deep, E. and W. of cor.

- 48.00 I.A. Pederson's house bears N.11 $\frac{1}{2}$ °E., about 12 chs. dist.
- 79.80 The cor. of secs. 3, 4, 9 and 10.

Land: level.  
Soil: adobe loam, 1st rate.  
Timber: none.  
Undergrowth: palo verde, mesquite, cactus, sage,

Survey of Subdivisions of T.6 S., R.10 E.

Chains

greasewood.

- N.0°02'W., on true line, bet. secs. 3 and 4.  
Over level land; through moderate undergrowth.
- 6.20 Wash, 10 lks. wide, course N.60°W.
- 7.80 A little-used road, bears NW. and SE.
- 33.60 Wash, 10 lks. wide, course W.
- 37.30 A little-used road, bears E. and W.
- 38.80 Wash, 10 lks. wide, course NW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked



from which

- A palo verde, 12 ins. diam., bears N.42 $\frac{1}{2}$ °E., 140 lks. dist., marked  $\frac{1}{4}$  S3 BT.
- A palo verde, 14 ins. diam., bears S.52 $\frac{1}{2}$ °W., 96 lks. dist., marked  $\frac{1}{4}$  S4 BT.

- 40.90 Wash, 5 lks. wide, course N.70°W.
- 41.30 Branch of same, 5 lks. wide, course SW.
- 51.70 Wash, 10 lks. wide, course S.80°W.
- 53.10 A little-used road, bears E. and W.
- 71.39 Highway, bears N.38 $\frac{1}{2}$ °W. to Florence and S.38 $\frac{1}{2}$ °E. to Tucson.
- 95.60 Wash, 15 lks. wide, 2 ft. deep, course N.75°W.
- 112.00 A little-used road, bears NE. and SW.

118.83 Intersect the 1st St. Par., S., at a point 16 lks. N.89°58' W. of the standard  $\frac{1}{4}$  sec. cor. of sec. 34, which is a wood post, 4 ins. diam., projecting 18 ins. above ground, firmly set, with partly legible marks on N. face, with dim remains of witness pits E. and W. of cor.

At point of intersection,  
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for closing cor. of secs. 3 and 4, with brass cap marked



Dig pits, 18 ins. square, 1 ft. deep, SE. and SW. of cor., 3 ft. dist. (No larger post available).

Land: level.  
Soil: adobe loam, 1st. rate.  
Timber: none.  
Undergrowth: palo verde, cactus, mesquite, sage, greasewood.

From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp., which is an iron post, 2 ins. diam., projecting 10 ins. above ground; firmly set, properly marked on brass cap, dated, 1919, with remains of witness pits. N.0°02'W., on true line, bet. secs. 32 and 33.  
Over rolling land; through scattering undergrowth.

2.90 Short drain, course S.60°W.

Chains

10.70 Low spur, slopes S.60°W. Desc. 20 ft.  
22.50 Drain, course W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
 S32 | S33  
 1930

Raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.

asc. 50 ft. over S. slope.

43.50 Rocky knoll on spur, slopes W. Desc. 75 ft. over general N. slope.

60.00 Over level land.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 28, 29, 32 and 33, with brass cap marked

T6SR10E  
 S29 | S28  
 S32 | S33  
 1930

Dig pits, 18 ins. square, 1 ft. deep, one in each sec., 3 ft. dist.

Land: rolling and level.

Soil: rocky adobe, 2nd rate.

Timber: none.

Undergrowth: palo verde, cactus, greasewood, sage, mesquite, catclaw.

40.00 East, on random line, bet. secs. 28 and 33.  
Set temp.  $\frac{1}{4}$  sec. cor.

79.95 Fall 5 lks. N. of the cor. of secs. 27, 28, 33 and 34.  
Thence

N.89°53'W., on true line, bet. secs. 28 and 33.

Over level land; through moderate undergrowth.

38.00 Wash, 50 lks. wide, 2 ft. deep, course N.15°W.

38.00 Wash, 50 lks. wide, 2 ft. deep, course N.

39.97 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

S28

S33

1930

from which

A palo verde, 6 ins. diam., bears N.21°E., 63 lks. dist., marked  $\frac{1}{4}$  S28 BT.

A palo verde, 8 ins. diam., bears S.56°E., 196 lks. dist., marked  $\frac{1}{4}$  S33 BT.

44.00 Junction of washes from S. and SE., 30 lks. wide, 2 ft. deep, course NW.

47.40 Wash, 30 lks. wide, 3 ft. deep, course NNW.

56.80 Wash, 15 lks. wide, 2 ft. deep, course NW.

79.93 The cor. of secs. 28, 29, 32 and 33.

Chains

Land: level.  
Soil: adobe loam, 1st rate.  
Timber: none.  
Undergrowth: palo verde, cactus, catclaw, mesquite, sage, greasewood.

N.0°02'W., on true line, bet. secs. 28 and 29.  
Over level land; through scattering undergrowth.  
21.00 Hill, 30 ft. high, bears about 6 chs. W.  
29.80 Wash, 15 lks. wide, course NW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor., with brass cap marked

S29 | S28  
1930

Dig pits, 18 ins. square, 1 ft. deep, N. and S. of cor.

52.60 Wash, 60 lks. wide, 4 ft. deep, course N.75°W.

55.50 Wash, 60 lks. wide, 4 ft. deep, course N.60°W.

67.30 Dim road, bears SW. and NE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 33 ins. in the ground, for cor. of secs. 20, 21, 28 and 29, with brass cap marked

T6SR10E  
S20 | S21  
S29 | S28  
1930

from which

A mesquite, 6 ins. diam., bears S.45°E., 23 lks. dist., marked T6S R10E S28 BT.

A mesquite, 6 ins. diam., bears N.61 1/2°E., 118 lks. dist., marked T6S R10E S21 BT.

A cabin bears S.64°E. about 17 chs. dist.

Dig pits, 18 ins. square, 1 ft. deep, one in each sec., 3 ft. dist.

Land: level.  
Soil: adobe loam, 1st rate.  
Timber: none.  
Undergrowth: palo verde, mesquite, cactus, sage, greasewood, ironwood.

S.89°58'E., on random line, bet. secs. 21 and 28.  
40.00 Set temp. 1/2 sec. cor.  
79.90 Fall 7 lks. N. of the cor. of secs. 21, 22, 27 and 28. Thence

N.89°55'W., on true line, bet. secs. 21 and 28.  
Over level land; through scattering undergrowth.  
2.50 Road, bears NW. and SE.

20.00 Wash, 10 lks. wide, 4 ft. deep, course SW.

39.95 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for 1/4 sec. cor., with brass cap marked

S21  
S28  
1930

Dig pits, 18 ins. square, 1 ft. deep, E. and W. of cor.

Survey of Subdivisions of T.6 S., R.10 E.

Chains


- 64.20 Wash, 10 lks. wide, 2 ft. deep, course NW.
- 68.40 Road, bears N. and SSE.
- 72.30 Road, bears NW. and SE.
- 77.10 Wash, 5 lks. wide, course NW.
- 79.90 The cor. of secs. 20, 21, 28 and 29.

Land: level.  
 Soil: adobe loam, 1st rate.  
 Timber: none.  
 Undergrowth: palo verde, mesquite, sage, greasewood,  
 cactus.

N.0°02'W., on true line; bet. secs. 20 and 21.  
 Over level land; through scattering undergrowth.

- 0.70 Wash, 10 lks. wide, course N.75°W.
- 4.50 Wash, 20 lks. wide, course W.
- 10.10 Road, bears NW. and SE.


- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked



Dig pits, 18 ins. square, 1 ft. deep, N. and S. of cor.

- 40.70 Road, bears NW. and SE.
- 57.20 Road, bears E. and W.
- 63.10 Road, bears NW. and SE.

- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 16, 17, 20 and 21, with brass cap marked



Dig pits, 18 ins. square, 1 ft. deep, one in each sec.,  
 3 ft. dist.


Land: level.  
 Soil: adobe loam, 1st rate.  
 Timber: none.  
 Undergrowth: greasewood, mesquite, palo verde.

- S.89°55'E., on random line, bet. secs. 16 and 21.
- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
- 80.01 Fall 9 lks. S. of the cor. of secs. 15, 16, 21 and 22.  
 Thence

N.89°59'W., on true line, bet. secs. 16 and 21.  
 Over level land; through scattering undergrowth.

- 14.30 Wash, 10 lks. wide, course NW.
- 16.70 Wash, 5 lks. wide, course N.60°W.
- 19.50 Wash, 10 lks. wide, course NW.

- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked





Chains

from which  
A mesquite, 6 ins. diam., bears S.42°E., 171 lks.  
dist., marked  $\frac{1}{4}$  S21 BT.  
Dig pits, 18 ins. square, 1 ft. deep, E. and W. of cor.

41.20 New road, bears N. and SE.

80.01 The cor. of secs. 16, 17, 20 and 21.


Land: level.  
Soil: adobe loam, 1st rate.  
Timber: none.  
Undergrowth: greasewood, palo verde, mesquite, cactus,  
sage.

N.0°02'W., on true line, bet. secs. 16 and 17.  
Over level land; through scattering undergrowth.

16.10 Road, bears E. and W.

33.60 Wash, 10 lks. wide, course W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked



from which  
A mesquite, 8 ins. diam., bears East, 250 lks. dist.,  
marked  $\frac{1}{4}$  S16 BT.  
A mesquite, 4 ins. diam., bears N.46°W., 97 lks.  
dist., marked  $\frac{1}{4}$  S17 BT.

60.00 Wash, 10 lks. wide, course W.

74.50 Wash, 10 lks. wide, course S.70°W.

77.70 Wash, 10 lks. wide, course SW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in  
the ground, for cor. of secs. 8, 9, 16 and 17, with  
brass cap marked



from which  
A mesquite, 2 ins. diam., bears S.0 $\frac{1}{4}$ °E., 172 lks.  
dist., marked BT.  
A mesquite, 5 ins. diam., bears S.35 $\frac{1}{4}$ °W., 135 lks.  
dist., marked T6S R10E S17 BT.  
Dig pits, 18 ins. square, 1 ft. deep, one in each  
sec., 3 ft. dist.

Land: level.  
Soil: adobe loam, 1st rate.  
Timber: none.  
Undergrowth: greasewood, palo verde, mesquite, sage,  
cactus.

S.89°59'E., on random line, bet. secs. 9 and 16.  
40.00 Set temp.  $\frac{1}{4}$  sec. cor.

Chains

80.00 Fall 2 lks. S. of the cor. of secs. 9, 10, 15 and 16. Thence West, on true line, bet. secs. 9 and 16. Over level land; through scattering undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$ S9  
 $\frac{1}{4}$ S16  
1930

from which  
A mesquite, 6 ins. diam., bears N.33°E., 190 lks. dist., marked  $\frac{1}{4}$  S9 BT.  
A mesquite, 6 ins. diam., bears S.40 $\frac{1}{2}$ °W., 146 lks. dist., marked  $\frac{1}{4}$  S16 BT.

50.80 Wash, 10 lks. wide, 3 ft. deep, course S.65°W.

60.60 Same wash, course NW.

65.00 Same wash, course S.80°W. Along same.

70.40 Same wash, course SW.

80.00 The cor. of secs. 8, 9, 16 and 17.

Land level.  
Soil: adobe loam, 1st rate.  
Timber: none.  
Undergrowth: greasewood, palo verde, cactus, mesquite, sage.

N.0°02'W., on true line, bet. secs. 8 and 9. Over level land; through moderate undergrowth.

33.60 Wash, 10 lks. wide, course W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$ S8  
 $\frac{1}{4}$ S9  
1930

from which  
A palo verde, 6 ins. diam., bears N.68 $\frac{1}{2}$ °E., 222 lks. dist., marked  $\frac{1}{4}$  S9 BT.  
A mesquite, 6 ins. diam., bears N.23 $\frac{1}{2}$ °W., 241 lks. dist., marked  $\frac{1}{4}$  S8 BT.

47.40 Wash, 3 lks. wide, 4 ft. deep, course NW.

64.30 Wash, 5 lks. wide, 3 ft. deep, course W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 4, 5, 8 and 9, with brass cap marked

T6SR10E  
S5|S4  
S8|S9  
1930

Dig pits, 18 ins. square, 1 ft. deep, one in each sec., 3 ft. dist.

Land: level.  
Soil: adobe loam, 1st rate.  
Timber: none.  
Undergrowth: palo verde, mesquite, ironwood, sage, greasewood, cactus.

Survey of Subdivisions of T.6 S., R.10 E.

Chains

East, on random line, bet. secs. 4 and 9.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.90 Fall 4 lks. S. of the cor. of secs. 3, 4, 9 and 10.  
 Thence  
 S.  $89^{\circ}58'W.$ , on true line, bet. secs. 4 and 9.  
 Over level land; through moderate undergrowth.  
 11.00 Wash, course NW.  
 33.60 Wash, 10 lks. wide, course N.  $65^{\circ}W.$   
 39.95 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$  S4  
 S9  
 1930

from which  
 A mesquite, 8 ins. diam., bears N.  $60^{\circ}E.$ , 100 lks.  
 dist., marked  $\frac{1}{4}$  S4 BT.  
 Dig pits, 18 ins. square, 1 ft. deep, E. and W. of cor.

79.90 The cor. of secs. 4, 5, 8 and 9.  
 Land: level.  
 Soil: adobe loam, 1st rate.  
 Timber: none.  
 Undergrowth: greasewood, cactus, palo verde, mesquite.

N.  $0^{\circ}02'W.$ , on true line, bet. secs. 4 and 5.  
 Over level land; through moderate undergrowth.

15.00 Wash, 10 lks. wide, course N.  $65^{\circ}W.$   
 15.70 Wash, 10 lks. wide, course N.  $60^{\circ}W.$   
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
 S5 | S4  
 1930

Dig pit, 18 ins. square, 1 ft. deep, N. and S. of cor.

47.70 Wash, 10 lks. wide, course NW.  
 52.10 Wash, 10 lks. wide, course NW.  
 71.70 Road, bears E. and W.  
 74.70 Wash, 10 lks. wide, course W.

118.93 Intersect the 1st St. Par., S., at a point 52 lks. S.  $89^{\circ}58'$   
 E. of the standard  $\frac{1}{4}$  sec. cor. of sec. 33, which is a  
 wood post, 4 ins. diam., projecting 18 ins. above  
 ground, firmly set, with partly legible scribe marks  
 on N. face, and with evidence of witness pits E. and  
 W. of cor.  
 At point of intersection,  
 Set an iron post, 3 ft. long, 1 in. diam., (no larger  
 post available) 28 ins. in the ground, for closing  
 cor. of secs. 4 and 5, with brass cap marked

T5SR10E  
 S33  
 S5 | S4  
 C C  
 T6SR10E  
 1930

Dig pits, 18 ins. square, 1 ft. deep, SE. and SW. of

Chains

cor., 3 ft. dist.

Land: level.

Soil: adobe loam, 1st rate.

Timber: none.


Undergrowth: palo verde, mesquite, greasewood, cactus.

From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., which is an iron post, 3 ft. long, 2 ins. diam., projecting 10 ins. above ground, firmly set, properly marked on brass cap, dated 1919, with witness mound of stone W. of cor.

N.0°03'W., on true line, bet. secs. 31 and 32.  
Over rolling land; through scattering undergrowth.

- 5.00 Spur, slopes NE.
- 10.30 Gully, 5 lks. wide, course N.25°E.
- 13.10 Small conical hill bears 6 chs. E.
- 15.00 Draw, course NNE.
- 18.20 Wash, 15 lks. wide, course NE.
- 35.00 Rocky wash, 15 lks. wide, course NE.


- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, supported by a mound of stone, for sec. cor., with brass cap marked



Raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.

- 40.40 Wash, 15 lks. wide, course NE.
- 46.30 Small drain, course NE.
- 56.10 Gulch, from SW., course N.
- 65.30 Junction gulches from S. and SE., course NW.

- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 29, 30, 31 and 32, with brass cap marked



from which  
An ironwood, 8 ins. diam., bears S.39°E.; 60 lks. dist., marked T6S R10E S32 BT.  
Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land: rolling.  
Soil: gravelly, 2nd and 3rd rates.  
Timber: none.  
Undergrowth: palo verde, cactus, ironwood, greasewood, sage.

- 40.00 East, on random line, bet. secs. 29 and 32. Set temp. 1/4 sec. cor.
- 80.04 Fall 4 lks. S. of the cor. of secs. 28, 29, 32 and 33. Thence S.89°58'W., on true line, bet. secs. 29 and 32. Over rolling land; through scattering undergrowth.

Survey of Subdivisions of T.6 S., R.10 E.

Chains  
 12.20 Wash, 20 lks. wide, course NE. Over low knolls.  
 32.60 Wash, 5 lks. wide, course NW.

40.02 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

S29  
 S32  
 1930

Raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.

52.40 Wash, 10 lks. wide, course NW.  
 58.40 Wash, 15 lks. wide, course NW.  
 60.10 Road, bears NW. and SE.  
 60.90 Wash, 60 lks. wide, course NW.  
 80.04 The cor. of secs. 29, 30, 31 and 32.

Land: rolling.  
 Soil: gravelly, 2nd rate.  
 Timber: none.  
 Undergrowth: palo verde, mesquite, ironwood, sage, greasewood, cactus.

West, on random line, bet. secs. 30 and 31.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 70.27 Fall 14 lks. N. of the cor. of secs. 30 and 31, only, on the W. bdy. of the Tp., hereinbefore described.

Thence  
 N. 89° 53' E., on true line, bet. secs. 30 and 31.  
 Over rolling land; through scattering undergrowth.  
 Asc. 25 ft. over W. slope.

15.30 Spur, slopes N. Desc. 20 ft.  
 20.40 Small drain, course N.

30.27 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, deposit a stone, marked with cross (x) at base of post, raise a mound of stone, 3 ft. base, 1 1/2 ft. high, around post, for  $\frac{1}{4}$  sec. cor., with brass cap marked

S30  
 S31  
 1930

37.40 Ravine, course NW.  
 40.70 Wash, 5 lks. wide, course NNW.  
 54.40 Gully, course NE.  
 63.70 Wash, 20 lks. wide, course N. 15° E.

70.27 The cor. of secs. 29, 30, 31 and 32.

Land: level.  
 Soil: gravelly, 2nd rate.  
 Timber: none.  
 Undergrowth: palo verde, mesquite, greasewood, cactus, ironwood, catclaw, etc.

N. 0° 03' W., on true line, bet. secs. 29 and 30.  
 Over rolling land; through scattering undergrowth.

9.30 Enter wash, course NW.  
 11.20 Leave same.  
 16.70 Wash, 50 lks. wide, course NW. Over level land.  
 17.80 Road, bears SE. and NW.

## Survey of Subdivisions of T.6 S., R.10 E.

Chains

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

S30 | S29  
1930

Dig pit, 18 ins. square, 1 ft. deep, N. and S. of cor.

77.90 Wash, 15 lks. wide, course NW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 19, 20, 29 and 30, with brass cap marked

T6SR10E  
S19 | S20  
S30 | S29  
1930

Dig pits, 18 ins. square, 1 ft. deep, one in each sec. 3 ft. dist.

Land: rolling and level.

Soil: gravel, 2nd rate and loam, 1st rate.

Timber: none.

Undergrowth: palo verde, mesquite, greasewood, sage, cactus.

N. 89° 58' E., on random line, bet. secs. 20 and 29.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.21 Intersect the cor. of secs. 20, 21, 28 and 29.

Thence

S. 89° 58' W., on true line, bet. secs. 20 and 29.

Over level land; through scattering undergrowth.

18.50 Wash, 30 lks. wide, course NW.

20.10 Wash, 10 lks. wide, course NW.

30.10 Wash, 30 lks. wide, course NW.

40.10 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

S20  
S29  
1930

Dig pits, 18 ins. square, 1 ft. deep, E. and W. of cor.

51.20 Wash, 20 lks. wide, course NW.

51.80 Dim road, bears NW. and SE.

76.40 Road, bears NW. and SE.

80.21 The cor. of secs. 19, 20, 29 and 30.

Land: level.

Soil: loam, 1st rate.

Timber: none.

Undergrowth: palo verde, mesquite, greasewood, cactus.

S. 89° 53' W., on random line, bet. secs. 19 and 30.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

70.19 Fall 4 lks. S. of the cor. of secs. 19 and 30, only, on the W. bdy. of the T., hereinbefore described.

Thence

N. 89° 55' E., on true line, bet. secs. 19 and 30.

## Survey of Subdivisions of T.6 S., R.10 E.

## Chains

Over level land; through scattering undergrowth.  
 20.00 Wash, 5 lks. wide, course SE.  
 21.10 Same wash, course NW.

30.19 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$ S19  
 $\frac{1}{4}$ S30  
 1930

Dig pits, 18 ins. square, 1 ft. deep, E. and W. of cor.

31.40 Wash, 5 lks. wide, course NW.

68.00 Wash, 15 lks. wide, course NW.

70.19 The cor. of secs. 19, 20, 29 and 30.

Land: level.

Soil: adobe loam, 1st rate.

Timber: none.

Undergrowth: palo verde, cactus, sage, mesquite.

N.0°03'W., on true line, bet. secs. 19 and 20.

Over level land; through scattering undergrowth.

19.60 Road, bears SE. and NW.

22.80 Wash, 10 lks. wide, course NW.

35.50 Wash, 25 lks. wide, 3 ft. deep, course N.65°W.

37.60 Wash, 60 lks. wide, 6 ft. deep, course N.70°W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$ S19 S20  
 1930

from which

A palo verde, 3 ins. diam., bears N.13 $\frac{1}{4}$ °E., 97 lks. dist., marked  $\frac{1}{4}$  S20 BT.

A mesquite, 6 ins. diam., bears S.11 $\frac{1}{2}$ °W., 189 lks. dist., marked  $\frac{1}{4}$  S19 BT.

Cabin bears N.73°W., about 14 chs. dist.

40.15 Road, bears E. and W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 17, 18, 19 and 20, with brass cap marked

T6SR10E  
 $\frac{1}{4}$ S18 |  $\frac{1}{4}$ S17  
 $\frac{1}{4}$ S19 |  $\frac{1}{4}$ S20  
 1930

Dig pits, 18 ins. square, 1 ft. deep, one in each sec. 3 ft. dist.

Land: level.

Soil: adobe loam, 1st rate.

Timber: none.

Undergrowth: greasewood, sage, mesquite, palo verde.

Chains

- N.89°58'E., on random line, bet. secs. 17 and 20.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.22 Intersect the cor. of secs. 16, 17, 20 and 21.  
 Thence  
 S.89°58'W., on true line, bet. secs. 17 and 20.  
 Over level land; through scattering undergrowth.  
 12.20 Road, bears NW. and SE.  
 34.40 Road, bears NW. and SE.  
 40.11 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

S17  
 $\frac{1}{4}$ S20  
 1930

Dig pits, 18 ins. square, 1 ft. deep, E. and W. of cor.

- 45.90 Wash, 10 lks. wide, course NW.  
 53.90 Road, bears NW. and SE.

80.22 The cor. of secs. 17, 18, 19 and 20.

Land: level.  
 Soil: adobe loam, 1st rate.  
 Timber: none.  
 Undergrowth: palo verde, cactus, greasewood, sage,  
 mesquite.

- S.89°55'W., on random line, bet. secs. 18 and 19.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 70.16 Intersect the cor. of secs. 18 and 19, only, on the W.  
 bay. of the Tp., hereinbefore described.

Thence  
 N.89°55'E., on true line, bet. secs. 18 and 19.  
 Over level land; through scattering undergrowth.

- 30.16 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

S18  
 $\frac{1}{4}$ S19  
 1930

Dig pits, 18 ins. square, 1 ft. deep, E. and W. of cor.

- 51.40 Wash, 5 lks. wide, course NW.  
 55.80 Road, bears N. and S.  
 56.60 Wash, 10 lks. wide, course N.

70.16 The cor. of secs. 17, 18, 19 and 20.

Land: level.  
 Soil: adobe loam, 1st rate.  
 Timber: none.  
 Undergrowth: greasewood, cactus, sage, palo verde,  
 mesquite.

- N.0°03'W., on true line, bet. secs. 17 and 18.  
 Over level land; through scattering undergrowth.  
 37.00 Road, bears NW. and SE.

- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked



Survey of Subdivisions of T.6 S., R.10 E.

Chains

1  
S18 | S17  
1930

Dig pit, 18 ins. square, 1 ft. deep, N. and S. of cor.

- 61.40 Road, bears NW. and SE.
- 68.50 Road, bears E. and W.
- 76.70 Wash, 20 lks. wide, 2 ft. deep, course NW.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 7, 8, 17 and 18, with brass cap marked

T6SR10E  
S7 | S8  
S18 | S17  
1930

from which  
 A mesquite, 6 ins. diam., bears S. 58 1/4° E., 255 lks. dist., marked T6S R10E S17 BT.  
 A cabin bears S. 53 1/2° E., about 15 chs. dist.  
 Dig pits, 18 ins. square, 1 ft. deep, one in each sec., 3 ft. dist.

Land: level.  
 Soil: adobe loam, 1st. rate.  
 Timber: none.  
 Undergrowth: greasewood, sage, mesquite, palo verde.

- N. 89° 58' E., on random line, bet. secs. 8 and 17.
- 40.00 Set temp. 1/4 sec. cor.
- 80.26 Fall 2 lks. N. of the cor. of secs. 8, 9, 16 and 17, thence  
 S. 89° 59' W., on true line, bet. secs. 8 and 17.  
 Over level land; through scattering undergrowth.
- 7.90 Wash, 5 lks. wide, course NW.

- 40.13 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor., with brass cap marked

1 S8  
S17  
1930

Dig pits, 18 ins. square, 1 ft. deep, E. and W. of cor.

- 53.80 Wash, 10 lks. wide, course NW.
- 70.00 Road, bears SE. and NW.
- 80.26 The cor. of secs. 7, 8, 17 and 18.

Land: level.  
 Soil: adobe loam, 1st rate.  
 Timber: none.  
 Undergrowth: greasewood, sage, mesquite, palo verde.

- S. 89° 55' W., on random line, bet. secs. 7 and 18.
- 40.00 Set temp. 1/4 sec. cor.
- 70.18 Fall 8 lks. S. of the cor. of secs. 7 and 18, only, on the W. bdy. of the Twp., hereinbefore described.  
 Thence

Chains

N.89°59'E., on true line, bet. secs. 7 and 18.  
 Over level land; through scattering undergrowth.  
 Over level land; through scattering undergrowth.

30.18 Set an iron post, 5 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

S7  
 $\frac{1}{4}$ S18  
 1930.

from which  
 A mesquite, 6 ins. diam., bears S.49°E., 169 lks. dist., marked  $\frac{1}{4}$  S18 BT.  
 A mesquite, 4 ins. diam., bears N.48½°E., 68 lks. dist., marked  $\frac{1}{4}$  S7 BT.

60.18 Road, bears N. and S.

67:08 Wash, 10 lks. wide, course NW.

70.18 The cor. of secs. 7, 8, 17 and 18.

Land; level. Soil, above loam; 1st rate.  
 Timber: none.  
 Undergrowth: greasewood, sage, mesquite, palo verde.

N.0°03'W., on true line, bet. secs. 7 and 8.  
 Over level land; through scattering undergrowth.

3.00 Wash, 3 lks. wide, 3 ft. deep, course W.  
 4.50 Road, bears NW. and SE.  
 9.40 Wash, 5 lks. wide, 2 ft. deep, course N.70°W.  
 11.60 Road, bears NW. and SE.  
 18.90 Wash, 5 lks. wide, course NW.

40.00 Set an iron post, 5 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

S7  
 $\frac{1}{4}$ S8  
 1930

from which  
 A mesquite, 8 ins. diam., bears S.55°E., 83 lks. dist., marked  $\frac{1}{4}$  S8 BT.  
 A mesquite, 6 ins. diam., bears S.42°E., 210 lks. dist., marked  $\frac{1}{4}$  S7 BT.

65.40 Wash, 10 lks. wide, 2 ft. deep, course W.

70.70 Wash, 5 lks. wide, 3 ft. deep, course NW.

80.00 Set an iron post, 5 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 5, 6, 7 and 8, with brass cap marked

T6SR10E  
 $\frac{1}{4}$ S6 | S5  
 $\frac{1}{4}$ S7 | S8  
 1930

from which  
 A mesquite, 6 ins. diam., bears N.9½°E., 292 lks. dist., marked T6S R10E S5 BT.

Chains

A mesquite, 6 ins. diam., bears S.60 $\frac{1}{4}$ °E., 272 lks.  
 dist., marked T6S R10E S8 BT.  
 A mesquite, 3 ins. diam., bears S.33 $\frac{1}{4}$ °W., 87 lks.  
 dist., marked BT.  
 A mesquite, 6 ins. diam., bears N.70°W., 320 lks.  
 dist., marked T6S R10E S6 BT.

Land: level.  
 Soil: adobe loam, 1st rate.  
 Timber: none.  
 Undergrowth: greasewood, sage, mesquite, palo verde.

40.00 N.89°59'E., on random line, bet. secs. 5 and 8.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.30 Fall 1 lk. S. of the cor. of secs. 4, 5, 8 and 9.  
 Thence  
 S.89°59'W., on true line, bet. secs. 5 and 8.  
 Over level land; through scattering undergrowth.  
 40.15 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$ S5  
 $\frac{1}{4}$ S8  
 1930

Dig pits, 18 ins. square, 1 ft. deep, E. and W. of cor.

80.30 The cor. of secs. 5, 6, 7 and 8.

Land: level.  
 Soil: adobe loam, 1st rate.  
 Timber: none.  
 Undergrowth: greasewood, sage, palo verde, cactus.

40.00 S.89°59'W., on random line, bet. secs. 6 and 7.  
 Set temp.  $\frac{1}{4}$  sec. cor.  
 70.20 Intersect the cor. of secs. 6 and 7, only, on the W. bdy.  
 of the Tp., hereinbefore described.  
 Thence  
 N.89°59'E., on true line, bet. secs. 6 and 7.  
 Over level land; through scattering undergrowth.  
 18.10 Wash, 5 lks. wide, course NW.  
 30.20 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$ S6  
 $\frac{1}{4}$ S7  
 1930

Dig pits, 18 ins. square, 1 ft. deep, E. and W. of cor.

34.20 Road, bears NW. and SE.  
 70.20 The cor. of secs. 5, 6, 7 and 8.

Land: level.  
 Soil: adobe loam, 1st rate.  
 Timber: none.  
 Undergrowth: greasewood, sage, mesquite, palo verde,  
 cactus.

Chains

N.0°03'W., on true line, bet. secs. 5 and 6.  
Over level land; through scattering undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
 S6 | S5  
 1930

from which

A mesquite, 8 ins. diam., bears N.41 $\frac{1}{2}$ °W., 168 lks. dist., marked  $\frac{1}{4}$  S6 BT.

Dig pits, 18 ins. square, 1 ft. deep, N. and S. of cor.

- 45.00 Washes from SE. and E., 10 lks. wide, course W.  
 59.10 Wash, 5 lks. wide, course W.  
 87.60 Enter wash, 4 ft. deep, course W.  
 89.80 Leave same.  
 90.10 Unused road, bears E. and W.  
 91.50 Newer road, bears E. and W.  
 110.15 Road, bears NW. and SE.
- 118.95 Intersect the 1st. St., Par., S., at a point 62 lks. East of the standard  $\frac{1}{4}$  sec. cor. of sec. 32, which is a wood post, 4 ins. square, projecting 18 ins. above ground, firmly set, with dim scribe marks on N. face, and remains of original witness pits.
- At point of intersection  
 Set an iron post, 3 ft. long, 1 in. diam., (no larger post available) 30 ins. in the ground, for closing cor. of secs. 5 and 6, with brass cap marked

T5SR10E  
 S32  
 -----  
 S6 | S5  
 C | C  
 T6SR10E  
 1930

Dig pits, 18 ins. square, 1 ft. deep, SE. and SW. of cor., 3 ft. dist.

Land: level.

Soil: adobe loam, 1st rate.

Timber: none.

Undergrowth: greasewood, palo verde, cactus, mesquite, sage.

#### GENERAL DESCRIPTION

Land is level except a rolling portion in the SW. cor. Soil is an adobe loam, generally of good depth. There is no timber.

A heavy growth of the desert varieties of brush covers the township.

There is no water.

There is little evidence of mineral.

Several homesteaders reside on the W. part of the township.

4-680  
(August, 1926)

FIELD ASSISTANTS.  
to

Theo. VanderMeer, U.S. Transitman

NAMES.	CAPACITY.
Sam Palmer	First Chainman
Walter Grayum	Second Chainman
Ivan L. Dial	Moundsman
Kay Gyllstrom	Flagman
Cal Davis	Axman

BOOK 3924

CERTIFICATE OF UNITED STATES SURVEYOR

I, Theodore VanderMeer, U.S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer, for Group 162, Arizona, bearing date of the 8th day of January, 1930, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, resurveyed all those parts or portions of the West Boundary and surveyed all those parts or portions of the Subdivision Lines of Township 6 South, Range 10 East of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes and by diagram on page 1 hereof as having been executed by me, and under my direction; and that all the corners of said resurvey and survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer, for Group 162, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such resurvey and survey.

Place: Phoenix, Ariz  
 Date: May 7, 1930

*Theodore VanderMeer*  
 U.S. Transitman

APPROVAL

OFFICE OF U. S. SUPERVISOR OF SURVEYS,

Denver, Colorado, July 9, 1931

The foregoing field notes of the resurvey of part of the West Boundary and of the survey of the Subdivision Lines of Township 6 South, Range 10 East of the Gila and Salt River Base and Meridian, in the State of Arizona

executed by Theodore VanderMeer, U.S. Transitman under his special instructions dated January 8, 1930 for Group 162, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the resurveys and surveys they describe, are hereby approved.

*Wm. A. Simon*  
 U. S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above-described surveys in has been correctly copied from the original notes on file in this office.

U. S. Supervisor of Surveys.