

FIELD NOTES

OF THE RESURVEY OF THE

SOUTH BOUNDARY of Township 1 South, Range 4 West

and

EAST BOUNDARY of Township 2 South, Range 5 West

AND OF THE SURVEY OF

EAST BOUNDARY

AND

SUBDIVISION LINES

of

Township 2 South, Range 4 West

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

Benjamin J. Kinsey

and Karl L. Siebecker

U.S. Surveyors

In the capacity of U. S. Surveyor, under Special Instructions dated July 15, 1930, issued by the District Cadastral Engineer to govern surveys included in Group No. 164 Arizona, which were approved by the Commissioner of the General Land Office, August 5, 1930, and Assignment Instructions: to Kinsey dated Jan. 12, 1931 to Siebecker dated Dec. 23, 1930.

Resurvey and Survey commenced February 5, 1931

Resurvey and Survey completed April 3, 1931


3927

3927

(1)

INDEX DIAGRAM.

Township _____, Range _____

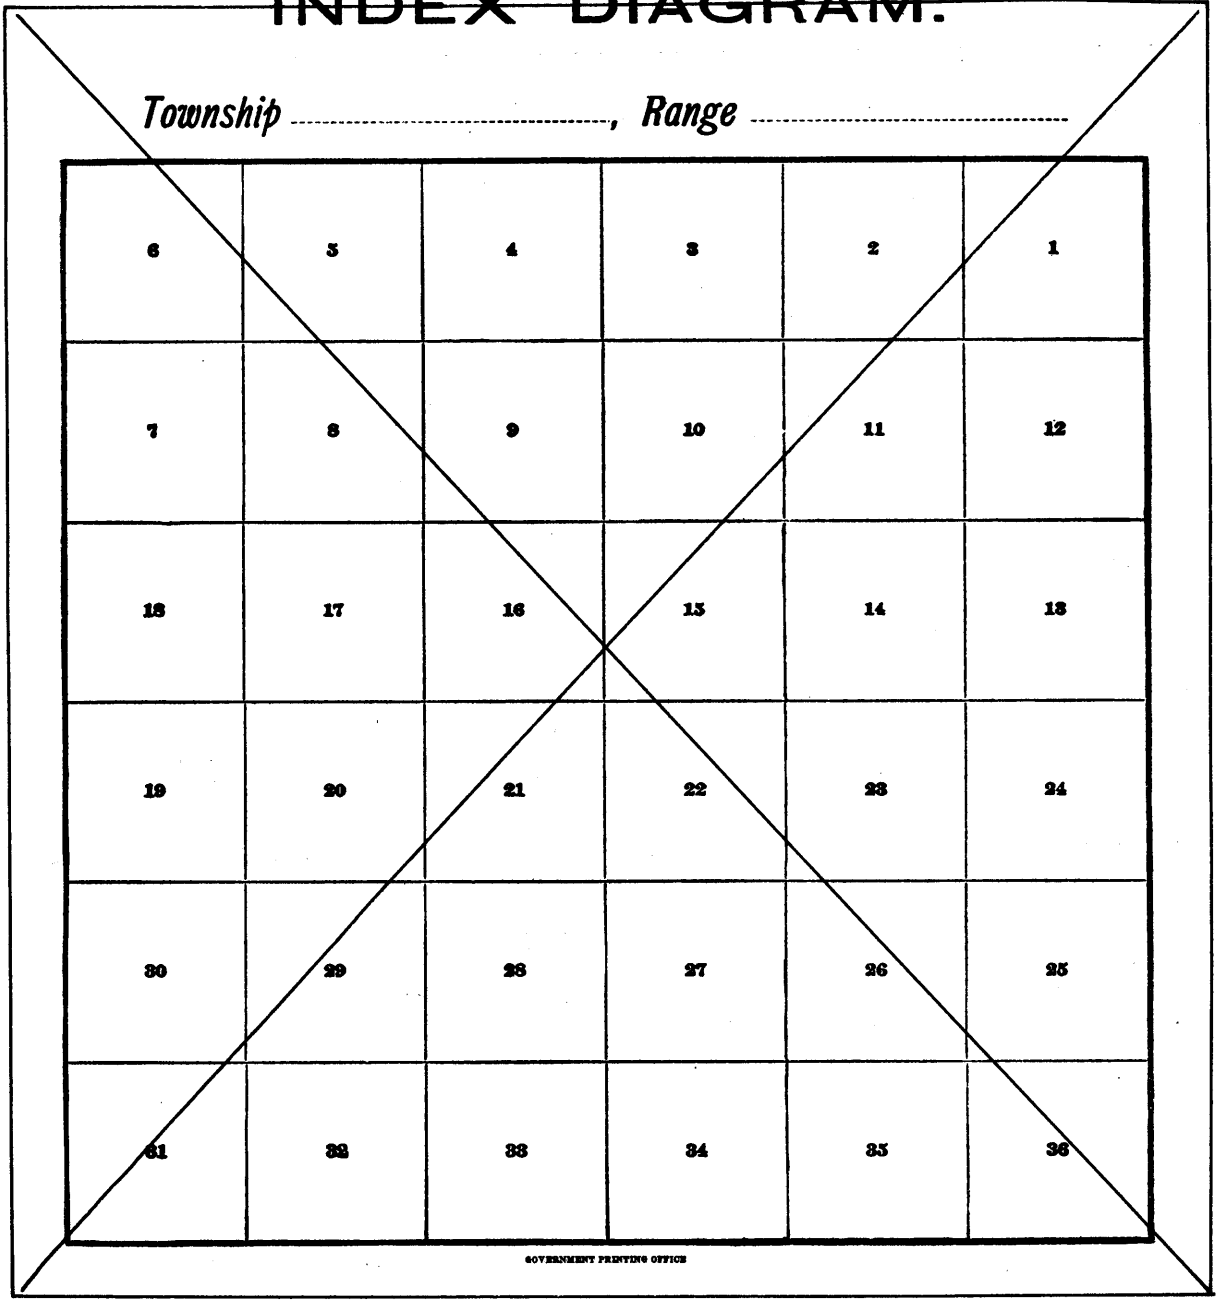

Book "C"
Group 164 Arizona
INDEX DIAGRAM

BOOK 3927

T.1S.-R.4W.

		31	32	33	34	35	36					
		11	10	10	9	9	8	8	7	7	6	
1	18	60	5	49	4	42	3	35	2	29	1	22
	17	59								28		
12	17	58	8	48	9	41	10	34	11	28	12	21
	16	57								27		
13	16	56	17	47	16	40	15	33	14	26	13	21
	15	55								26		
24	15	54	20	45	21	39	22	32	23	25	24	20
	14	53	53	52	45		38	31	31		25	
25	14	52	29	44	28	38	27	31	26	24	25	20
	13	51										19
36	14	51	51	50	44	43	37	30	30		24	23
	13	50	32	43	33	36	34	29	35	23	36	19
	13	49										

T.2S.
R.5W.

T.2S-
R.4W.

Note: The survey of the Range Line in T.2S. is transcribed herein and also in Book "B".
 In Book "B" the notes omit topography and describe only corr. referring to T.2S.-R.3W.
 The notes herein describe topography and all corr. referring to T.2S.-R.4W.

- Surveyed under this group.
- Resurveyed under this group.
- Accepted, surveyed lines.
- Areas surveyed as per accepted plats on file.

Book "C"

Group 164 Arizona

Township 2 South, Range 4 West

DATE DIAGRAM

(1931)

BOOK 3927

T.1S.-R.4W.

T.2S.
R.5W.

	31	32	33	34	35	36
	Feb. 23	Feb. 23	Feb. 23	Feb. 22	Feb. 22	Feb. 22
1	6 Feb. 24 Apr. 2	5 Apr. 2	4 Apr. 3	3 Mar. 30	2 Mar. 26	1 Mar. 12
12	7 Feb. 24 Mar. 27	8 Apr. 1	9 Apr. 1	10 Mar. 28	11 Mar. 26	12 Mar. 25
13	18 Feb. 24 Mar. 27	17 Mar. 27	16 Mar. 28	15 Mar. 21	14 Mar. 21	13 Mar. 17
24	19 Feb. 5 Mar. 24	20 Mar. 27	21 Mar. 23	22 Mar. 20	23 Mar. 18	24 Mar. 17
25	30 Feb. 5 Mar. 24	29 Mar. 24	28 Mar. 23	27 Mar. 20	26 Mar. 18	25 Mar. 17
36	31 Feb. 5 Mar. 24	32 Mar. 24	33 Mar. 23	34 Mar. 20	35 Mar. 18	36 Mar. 17

— { Surveyed under this group by Benj. J. Kinsey, U.S. Surveyor on dates (1931) shown thereon, & as described in the notes herein.

— { Resurveyed under this group by Karl L. Siebecker, U.S. Surveyor, on dates (1931) shown thereon, & as described in the notes herein.

— { Resurveyed under this group by Karl L. Siebecker, U.S. Surveyor. Date diagram and notes in Book "D".

— Accepted, surveyed lines.

The resurveys and surveys herein described were executed on dates shown on diagram on page 2 hereof.

The resurveys were executed by Karl L. Siebecker, U.S. Surveyor, using a Young & Sons transit No. 8487 and a Gurley solar transit No. 20120.

The surveys were executed by Benjamin J. Kinsey, U.S. Surveyor, using a Buff transit No. 18000.

Each of said instruments is equipped with an improved Smith solar attachment, and otherwise conforms to the standard requirements of the General Land Office.

Young & Sons transit No. 8487 was approved at Phoenix, Arizona, by the district cadastral engineer for the Cal. - Ariz. district, October 20, 1930; the Buff transit No. 18000 was approved by same officer Jan. 12, 1931, and the Gurley solar transit No. 20120 was approved Feb. 16, 1931. All of said approvals were made subject to satisfactory field tests of said instruments.

The directions of the lines were determined by solar transit method. The measurements were made with Lallie steel tapes 5 chs. in length, graduated every link for the first 100 lks., and thereafter at intervals of 10 links. The tapes were tested by comparison with a Lufkin standard tape and found correct. All measurements were made on the slope; the vertical angles were determined by clinometers in good adjustment; the field notes herein record the horizontal equivalents.

The data furnished with the special instructions gives the geographic position of the SE. cor. of T. 2 S., R. 4 W. in latitude 33° 12' 05" N., and longitude 112° 37' 00" W.

PRELIMINARY FIELD TEST of

Young & Sons transit No. 8487 and Gurley transit No. 20120
by Karl L. Siebecker, U.S. Surveyor.

February 1, 1931: at camp at the Beloit Ranch, near the center of SW-SW of sec. 6, T. 1 S., R. 2 W., G. & S. R. B. & M., Ariz., latitude 33° 22' N., longitude 112° 30 1/2' W., examine the adjustment of Young & Sons transit No. 8487 and find no errors; then, to test the solar apparatus by comparing its indications resulting from a.m. and p.m. observations with the true meridian established at this station by Polaris observation January 4, 1931 as described in Book "B" of this group (T. 2 S., R. 3 W.), proceed as follows:

At 9h. 00m., a.m., app. t., set off 33° 22' N. on the lat. arc, 17° 12 1/2' S. on the decl. arc, and determine a meridian with the solar, which agrees with the true meridian.

At 3h. 00m., p.m., app. t., with the lat. arc unchanged, set off 17° 8 1/2' S. on the decl. arc, and determine a meridian with the solar, which agrees with the true meridian.

February 18, 1931; at camp near the cor. of secs. 5, 6, 7 & 8 T. 3 S., R. 4 W., G. & S. R. B. & M., Ariz., latitude 33° 11' 13" N., longitude 112° 42' 10" W., at 10h. 11.7m. p.m., by watch, which reads correct 105th meridian time as determined by radio signals, observe Polaris at western elongation, ^{with Gurley transit No. 20120} making six sights, three each with the telescope in direct and reversed positions, and mark the mean point in the line thus determined by a nail in a peg driven firmly in the ground about 8 chs. N.

Azimuth of Polaris at western elongation = 1° 16' 03"

February 19, 1931; at 7h. 00m., a.m. lay off the azimuth of Polaris 1° 16' to the east and mark the meridian thus determined by a nail in a peg driven firmly in the ground about 8 chs. N.

Every hour from 7 to 11 a.m. and from 1 to 5 p.m. make proper settings on the arcs of the solar attachment and find that the resulting orientation of the instrument when compared with the true meridian, has a maximum error of less than 30".

PRELIMINARY FIELD TEST of
Buff Transit No. 18000
by Benjamin J. Kinsey, U.S. Surveyor.

March 12, 1931; at station near the center of SE $\frac{1}{4}$ of sec. 28, T.2 S., R.3 W., G. & S.R. B. & M., Ariz., latitude $33^{\circ}13'25''$ N., longitude $112^{\circ}34'09''$ W., on the meridian established by Polaris observation on Feb. 18, 1931 as described in Book "B" of this group (T.2 S., R.3 W.), test the solar apparatus of Buff transit No. 18000 as follows:

At 8h.00m. a.m., app. t., set off $33^{\circ}13\frac{1}{2}'$ N. on the lat. arc, $3^{\circ}30\frac{1}{2}'$ S. on the decl. arc, and determine a meridian with the solar, which agrees with the true meridian.

At 4h.00m. p.m., app. t., with the lat. arc unchanged, set off $3^{\circ}22\frac{1}{2}'$ S. on the decl. arc, and determine a meridian with the solar, which agrees with the true meridian.

March 15, 1931; at camp about 20 chs. S. of the $\frac{1}{4}$ sec. cor. of secs. 24 and 25, T.2 S., R.4 W., latitude $33^{\circ}14'28''$ N., longitude $112^{\circ}38'33''$ W., examine the adjustments of the transit and find no errors; then, to test the workings of the solar apparatus on Polaris meridian, proceed as follows:

At 8h. 23m., p.m., l.m.t., observe Polaris at western elongation, making four observations, two each with the telescope in direct and reversed positions, and mark the mean point on the line thus determined by a tack in a stake driven firmly in the ground about 5 chs. N.

Azimuth of Polaris at western elongation = $1^{\circ}16'13''$

March 16, 1931; at 7h.0m. a.m., lay off the azimuth of Polaris $1^{\circ}16'$ to the east and mark the meridian thus determined by a tack in a stake driven firmly in the ground about 5 chs. N.

At 9h.00m. a.m., app. t., set off $33^{\circ}14\frac{1}{2}'$ N. on the lat. arc, $1^{\circ}55'$ S. on the decl. arc, and determine a meridian with the solar, which agrees with the true meridian.

At app. noon, with the lat. arc unchanged, observe the sun on the meridian; the resultant reading of the decl. arc is $1^{\circ}52\frac{1}{2}'$ S., which agrees with the computed declination of the sun.

At 3h.00m. p.m., app. t., with the lat. arc unchanged, set off $1^{\circ}49'$ S. on the decl. arc and determine a meridian with the solar, which agrees with the true meridian.

As all of the solar observations made during the usual hours of solar work define positions for meridian which agree within 1' with the true meridian, conclude that the adjustments of the instrument are satisfactory.

Resurvey of the South boundary of T.1 S., R.4 W.

Chains	<p>The south bdy. of T.1 S., R.4 W. was surveyed by R.C. Powers, U.S.D.S. in 1882, establishing all cor. monuments thereon at 40 ch. intervals counting from the east, with a common reference to areas on both sides of the line.</p> <p>No retracement or resurvey of any part of this Tp. bdy. is of record.</p> <p>The following notes describe a dependent resurvey of the entire line, reconstructing all original cors. in their original positions by setting brass-capped iron posts alongside, and altering all of said cors. to refer to areas N. of line only.</p> <p style="text-align: center;">----- Retracement for Resurvey. -----</p> <p>From the original cor. of Ts.1 & 2 S., Rs.3 & 4 W., reconstructed and altered to refer to Ts.1 S., Rs.3&4W. only, as described in Book "B" of this group (T.2 S., R.3 W.)</p> <p>West, on random line, on S. bdy. of sec.36 (E. $\frac{1}{2}$)</p> <p>39.78 Intersect original $\frac{1}{4}$ sec.cor. of secs.1 & 36. True course and dist.: - West, 39.78 chs. Thence</p> <p>West, on random line, on S. bdy. of sec.36 (W. $\frac{1}{2}$)</p> <p>40.45 Fall 40 lks. S. of original cor. of secs.1, 2, 35 & 36. True course and dist.: - N.89°26'W., 40.45 chs.</p> <p style="text-align: center;">-----</p> <p>From sec. cor.,</p> <p>West, on random line, on S. bdy. of sec.35 (E. $\frac{1}{2}$)</p> <p>40.02 Fall 10 lks. S. of original $\frac{1}{4}$ sec.cor. of secs.2 & 35 True course and dist.: - N.89°51'W., 40.02 chs. Thence,</p> <p>West, on random line, on S. bdy. of sec.35 (W. $\frac{1}{2}$)</p> <p>39.95 Intersect the original cor. of secs.2, 3, 34 & 35. True course and dist.: - West, 39.95 chs.</p> <p style="text-align: center;">-----</p> <p>From sec.cor.,</p> <p>West, on random line, on S. bdy. of sec.34 (E. $\frac{1}{2}$)</p> <p>40.00 Fall 13 lks. S. of original $\frac{1}{4}$ sec.cor. of secs.3 & 34. True course and dist.: - N.89°49'W., 40.00 chs. Thence</p> <p>West, on random line, on S. bdy. of sec.34 (W. $\frac{1}{2}$)</p> <p>39.97 Fall 20 lks. S. of original cor. of secs.3, 4, 33 & 34. True course and dist.: - N.89°43'W., 39.97 chs.</p> <p style="text-align: center;">-----</p> <p>From sec. cor.,</p> <p>West, on random line, on S. bdy. of sec.33 (E. $\frac{1}{2}$)</p> <p>39.97 Fall 17 lks. S. of original $\frac{1}{4}$ sec.cor. of secs.4 & 33. True course and dist.: - N.89°45'W., 39.97 chs. Thence</p> <p>West, on random line, on S. bdy. of sec.33 (W. $\frac{1}{2}$)</p> <p>40.03 Fall 2 lks. S. of original cor. of secs.4, 5, 32 & 33. True course and dist.: - N.89°58'W., 40.03 chs.</p> <p style="text-align: center;">-----</p> <p>From sec.cor.,</p> <p>West, on random line, on S. bdy. of sec.32 (E. $\frac{1}{2}$)</p> <p>39.92 Fall 19 lks. S. of original $\frac{1}{4}$ sec.cor. of secs.5 & 32. True course and dist.: - N.89°44'W., 39.92 chs. Thence</p> <p>West, on random line, on S. bdy. of sec.32 (W. $\frac{1}{2}$)</p> <p>40.10 Fall 34 lks. S. of original cor. of secs.5, 6, 31 & 32. True course and dist.: - N.89°31'W., 40.10 chs.</p> <p style="text-align: center;">-----</p> <p>From sec.cor.,</p> <p>West, on random line, on S. bdy. of sec.31 (E. $\frac{1}{2}$)</p> <p>39.87 Fall 79 lks. N. of original $\frac{1}{4}$ sec.cor. of secs.6 & 31. True course and dist.: - S.88°52'W., 39.88 chs. Thence</p> <p>West, on random line, on S. bdy. of sec.31 (W. $\frac{1}{2}$)</p> <p>39.81 Fall 6 lks. S. of original cor. of Ts.1 & 2 S., Rs.4 & 5 W. True course and dist.: - N.89°55'W., 39.81 chs.</p> <p style="text-align: center;">-----</p>
--------	---

Resurvey of the South boundary of T.1 S., R.4 W.

Chains.	From the cor. of Ts.1 S.,Rs.3 & 4 W.,described in Book "B" of this group (T.2 S.,R.3 W.) West, on true line, on S. bdy. of sec.36 (E. $\frac{1}{2}$) Over rolling and hilly land, thru scattering timber and patches of dense undergrowth.
14.20	Road, brs. NE.-SW.
18.50	Wash, 80 lks. wide, course NE. Asc. 65 ft. over broken SE. slope.
25.50	Wash, 10 lks. wide, course SE.
30.90	Top of knoll. Desc. 55 ft.
32.50	Head of draw, course NE. Asc. 35 ft.
35.01	The closing cor. of Ts.2 S.,Rs.3 & 4 W.,hereinafter described.
36.20	Top of knoll. Desc. 35 ft. to
39.78	intersect the original $\frac{1}{4}$ sec.cor.of secs.1 & 36, which is a granite stone 5x8x14 ins. above ground, marked $\frac{1}{4}$ on N. face, and firmly set in ground and mound of stone. No accessories. Reconstruct this cor.monument and alter its reference as follows: alongside old stone, set an iron post, 3 ft.long, 1 in.in diam., 2 ins.in the ground to bedrock, and raise a mound of stone around post, for $\frac{1}{4}$ sec.cor.of sec. 36 only, with brass cap mkd.
	<u>$\frac{1}{4}$ S 36</u>
	1931
	from which
	a paloverde, 4 ins. in diam., brs. N.45 $\frac{1}{4}$ °E., 150 lks. dist., mkd. $\frac{1}{4}$ S36 BT
	a paloverde, 6 ins. in diam., brs. N.63 $\frac{1}{4}$ °W., 74 lks. dist., mkd. $\frac{1}{4}$ S36 BT
	Thence N.89°26'W., on true line, on S. bdy. of sec.36 (W. $\frac{1}{2}$) Over hilly land, thru scattering timber and undergrowth, with patches of dense undergrowth. Desc. 5 ft. over SW. slope.
0.05	Drain, course NW. Asc. 35 ft.
20.20	Spur, slopes NW. Desc. 45 ft.
35.20	Drain, course NW. Asc. 5 ft.
40.45	Intersect the original cor. of secs.1,2,35 and 36, which is a granite boulder in place,exposed 3x4x3 ft. above ground, mkd. and witnessed as described in the official record. Reconstruct this cor. monument and alter its reference as follows: south of and alongside the boulder, set an iron post, 3 ft. long, 2 ins. in diam., 6 ins. in the ground, over a cross (X) mkd. on bedrock, and raise a mound of stone around post, for cor. of secs.35 and 36 only, with brass cap mkd.
	T1S R4W S35 S36 T2S R4W S1
	1931
	from which
	a cross(X) and BO mkd. on face of cliff, brs. N.20 $\frac{3}{4}$ °E. 17 lks. dist.
	a paloverde, 4 ins. in diam., brs. N.81 $\frac{1}{2}$ °W., 76 lks. dist., mkd. T1S RAW S35 BT
	Land, rolling and hilly. Soil, rocky and gravelly loam, 4th rate. Timber, paloverde, ironwood and mesquite. Undergrowth, same,with greasewood,cacti and ocotillo.

Chains From cor. of secs. 35 and 36,
N. 89° 51' W., on true line, on S. bdy. of sec. 35 (E. 1/2)
Over rolling land, thru scattering timber and undergrowth,
with patches of dense undergrowth.

27.80 Road, brs. N.-S.

40.02 Intersect the original 1/4 sec. cor. of secs. 2 and 35, which
is a granite stone 5x12x8 ins. above ground, firmly set,
mkd. and witnessed as described in the official record.
Reconstruct this cor. monument and alter its reference
as follows:
alongside the old stone, set an iron post, 3 ft. long,
1 in. in diam., 18 ins. in the ground to bedrock, and
raise a mound of stone around post, for 1/4 sec. cor. of
sec. 35 only, with brass cap mkd.

1/4 S 35

1931

from which

a paloverde, 4 ins. in diam., brs. N. 34° E., 31 lks.
dist., mkd. 1/4 S 35 BT

a paloverde, 5 ins. in diam., brs. N. 80° W., 157 lks.
dist., mkd. 1/4 S 35 BT

Thence

West, on true line, on S. bdy. of sec. 35 (W. 1/2)
Over rolling land, thru scattering timber and undergrowth,
with patches of dense undergrowth.

5.00 Small knoll.

39.45 Wash, 70 lks. wide, course NW.

39.95 Intersect the original cor. of secs. 2, 3, 34 and 35, which
is a decayed wood post, illegibly marked, set in a
mound of stone. No trace of the record SW. bearing tree.
Reconstruct this cor. monument and alter its reference
as follows:

remove the mound of stone, and in center of its position
reset old wood post, and alongside same set an iron
post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground
for cor. of secs. 34 and 35 only, with brass cap mkd.

T1S R4W

S34 S35

T2S R4W

S2

1931

from which

a paloverde, 6 ins. in diam., brs. N. 56° E., 82 lks.
dist., mkd. T1S R4W S35 BT

a paloverde, 8 ins. in diam., brs. N. 12° W., 344 lks.
dist., mkd. T1S R4W S34 BT

Land, rolling.

Soil, rocky and gravelly loam, 4th rate.

Timber, paloverde, ironwood and mesquite.

Undergrowth, same, with greasewood, cacti and ocotillo.

From cor. of secs. 34 and 35,
N. 89° 49' W., on true line, on S. bdy. of sec. 34 (E. 1/2)
Over rolling land, thru scattering timber and undergrowth
with patches of dense undergrowth.

4.70 Road, brs. NW.-SE.

14.50 Wash, 30 lks. wide, course NE.

17.16 Road, brs. NE.-SW.

35.20 Wash, 20 lks. wide, course NW.

40.00 Intersect the original 1/4 sec. cor. of secs. 3 and 34, which
is a quartz stone 6x10x8 ins. above ground, firmly set,
mkd. and witnessed as described in the official record.
Reconstruct this cor. monument and alter its reference

Resurvey of the South boundary of T.1 S., R.4 W.

Chains

as follows:
alongside old stone, set an iron post, 3 ft. long,
1 in. in diam., 28 ins. in the ground, for $\frac{1}{4}$ sec.cor.
of sec.34 only, with brass cap mkd.

$\frac{1}{4}$ S 34

1931

from which
an ironwood, 5 ins. in diam., brs. N.36 $\frac{3}{4}$ °E., 36 lks.
dist., mkd. $\frac{1}{4}$ S34 BT
a paloverde, 4 ins. in diam., brs. N.54 $\frac{1}{2}$ °W., 54 lks.
dist., mkd. $\frac{1}{4}$ S34 BT

Thence

N.89°43'W., on true line, on S. bdy. of sec. 34 (W. $\frac{1}{2}$)
Over rolling land, thru scattering timber and undergrowth
with patches of dense undergrowth.

- 1.30 Wash, 15 lks. wide, course NE.
- 21.40 Wash, 10 lks. wide, course NE. Asc. 10 ft.
- 27.50 Saddle, brs. N.-S. Desc. 25 ft. to

39.97 Intersect the original cor. of secs. 3, 4, 33 and 34, which
is a granite stone 12x12x8 ins. above ground, firmly
set, mkd. and witnessed as described in the official
record.

Reconstruct this cor. monument and alter its reference
as follows:

alongside old stone, set an iron post, 3 ft. long,
2 ins. in diam., 27 ins. in the ground, for cor. of
secs. 33 and 34 only, with brass cap mkd.

T1S R4W

S33 | S34

T2S R4W

S3

1931

from which
a paloverde, 5 ins. in diam., brs. N.89 $\frac{3}{4}$ °E., 61 lks.
dist., mkd. T1S R4W S34 BT
a paloverde, 10 ins. in diam., brs. N.10 $\frac{1}{2}$ °W., 21 lks.
dist., mkd. T1S R4W S33 BT

Land, rolling.
Soil, rocky and gravelly loam, 4th rate.
Timber, paloverde, ironwood, and mesquite.
Undergrowth, same, with greasewood, cacti and ocotillo.

From cor. of secs. 33 and 34,
N.89°45'W., on true line, on S. bdy. of sec.33 (E. $\frac{1}{2}$)
Over rolling land, thru scattering timber and undergrowth
with patches of dense undergrowth.

- 1.10 Wash, 15 lks. wide, course NW.
- 2.00 Wash, 15 lks. wide, course NW.
- 12.70 Top of S. side of knoll, 35 ft. high.
- 25.00 Wash, 40 lks. wide, course NW.
- 38.50 Wash, 30 lks. wide, course NW.

39.97 Intersect the original $\frac{1}{4}$ sec.cor. of secs.4 and 33,
which is a quartz stone 10x10x6 ins. above ground,
firmly set, mkd. $\frac{1}{4}$ on N. face, and witnessed by a
mound of stone N. of cor. No trace of the record
NW. bearing tree.

Reconstruct this cor. monument and alter its reference
as follows:

alongside old stone, set an iron post, 3 ft. long,
1 in. in diam., 28 ins. in the ground, for $\frac{1}{4}$ sec.cor.
of secs.33 only, with brass cap mkd.

Resurvey of the South boundary of T.1 S., R.4 W.

Chains

1/4 S 33

1931

from which
 a paloverde, 5 ins. in diam., brs. N.31 1/2° E., 76 lks.
 dist., mkd. 1/4 S33 BT
 a paloverde, 6 ins. in diam., brs. N.37 1/2° W., 210 lks.
 dist., mkd. 1/4 S33 BT

Thence
 N.89°58' W., on true line, on S. bdy. of sec.33 (W. 1/2)
 Over rolling land, thru scattering timber and undergrowth
 with patches of dense undergrowth.

- 13.40 Road, brs. N.-SE.
- 17.15 Wash, 150 lks. wide, course NW.
- 31.60 Wash, 20 lks. wide, course N. Asc. 25 ft.
- 40.00 Low spur, slopes N.
- 40.03 Intersect the original cor. of secs.4,5,32 and 33, which
 is a granite stone 12x8x14 ins.above ground, firmly
 set, mkd. and witnessed as described in the official
 record.
 Reconstruct this cor.monument and alter its reference
 as follows:
 alongside old stone, set an iron post, 3 ft. long,
 2 ins. in diam., 28 ins. in the ground, for cor. of
 secs. 32 and 33 only, with brass cap mkd.

TLS R4W
 S32 | S33
 T2S R4W
 S4

1931

from which
 a paloverde, 6 ins. in diam., brs. N.45 1/2° E., 168 lks.
 dist., mkd. TLS R4W S33 BT
 an ironwood, 6 ins. in diam., brs. N.8 1/2° W., 152 lks.
 dist., mkd. TLS R4W S32 BT

Land, rolling and slightly hilly.
 Soil, rocky and gravelly loam, 4th rate.
 Timber, paloverde, ironwood, and mesquite.
 Undergrowth, same, with greasewood, cacti, and ocotillo.

- From cor. of secs. 32 and 33.
 N.89°44' W., on true line, on S. bdy. of sec. 32 (E. 1/2)
 Over hilly land, thru scattering timber and undergrowth,
 with patches of dense undergrowth.
 Desc. 30 ft. over NW. slope.
- 7.20 Wash, 20 lks. wide, course NE.
- 25.30 Wash, 100 lks. wide, course N.
- 34.80 Wash, 30 lks. wide, course NE. Asc. 10 ft. to
- 39.92 Intersect the original 1/4 sec. cor. of secs.5 and 32,
 which is a granite stone, 10x10x14 ins. above ground,
 firmly set, mkd. and witnessed as described in the
 official record.
 Reconstruct this cor.monument and alter its reference
 as follows:
 alongside the old stone, set an iron post, 3 ft. long,
 1 in.in diam., 10 ins.in the ground to bedrock, and
 raise a mound of stone around post, for 1/4 sec.cor. of
 sec. 32 only, with brass cap mkd.

1/4 S 32

1931

from which
 a paloverde, 6 ins. in diam., brs. N.1 1/2° E., 86 lks.
 dist., mkd. 1/4 S 32 BT

Resurvey of the South boundary of T.L S., R.4 W.

Chains	<p>a paloverde, 5 ins. in diam., brs. N.42$\frac{3}{4}$°W., 60 lks. dist., mkd. $\frac{1}{4}$ S 32 BT</p> <p>Thence N.89°31'W., on true line, on S. bdy. of sec. 32 (W.$\frac{1}{2}$) Over hilly land, thru scattering timber and undergrowth, with patches of dense undergrowth. Asc. 70 ft. over SE. slope.</p> <p>8.70 Spur, slopes SW. Desc. 80 ft. 20.80 Wash, 15 lks. wide, course NW. 26.20 Wash, 50 lks. wide, course N.10°E. Asc. 30 ft. 35.30 North side of low knoll. Desc. 20 ft. to 40.10 Intersect the original cor. of secs. 5, 6, 31 and 32, which is a granite stone 8x10x12 ins. above ground, firmly set, mkd. and witnessed as described in the official record. Reconstruct this cor. monument and alter its reference as follows: alongside old stone, set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, and raise a mound of stone around post, for cor. of secs. 31 and 32 only, with brass cap mkd.</p> <p style="text-align: center;">T1S R4W S31 S32 ----- T2S R4W S5 1931</p> <p style="text-align: right;">from which</p> <p>a paloverde, 4 ins. in diam., brs. N.63°E., 61 lks. dist., mkd. T1S R4W S32 BT a paloverde, 4 ins. in diam., brs. N.66°W., 39 lks. dist., mkd. T1S R4W S31 BT</p> <p>Land, hilly. Soil, rocky and gravelly loam, 4th rate. Timber, paloverde, ironwood, and mesquite. undergrowth, same, with greasewood, cacti, and ocotillo.</p> <hr/> <p>From cor. of secs. 31 and 32, S.88°52'W., on true line, on S. bdy. of sec. 31 (E.$\frac{1}{2}$) Over hilly land, thru scattering timber and undergrowth, with patches of dense undergrowth. Desc. 20 ft. over SW. slope.</p> <p>8.80 Wash, 100 lks. wide, course NW. 12.30 Wash, 20 lks. wide, course N. 19.40 Same wash, course SW. 22.50 Same wash, course NW. Asc. 50 ft. 39.00 Spur, slopes S. Desc. 5 ft. to 39.88 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 6 and 31, which is a granite stone 6x6x12 ins. above ground, firmly set, mkd. and witnessed as described in the official record. Reconstruct this cor. monument and alter its reference as follows: alongside old stone, set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor. of sec. 31 only, with brass cap mkd.</p> <p style="text-align: center;">$\frac{1}{4}$ S 31 ----- 1931</p> <p style="text-align: right;">from which</p> <p>a paloverde, 5 ins. in diam., brs. N.31$\frac{1}{4}$°E., 31 lks. dist., mkd. $\frac{1}{4}$ S31 BT a paloverde, 5 ins. in diam., brs. N.22$\frac{1}{2}$°W., 56 lks. dist., mkd. $\frac{1}{4}$ S31 BT</p>
--------	--

Resurvey of the South boundary of T.1 S., R.4 W.

Chains

Thence
 N.89°55'W., on true line, on S. bdy. of sec. 31 (W.½)
 Over hilly land, thru scattering timber and undergrowth
 with patches of dense undergrowth.
 Desc. 85 ft. over SW. slope.
 8.40 Road, brs. N.-SW.
 9.80 Wash, 10 lks. wide, course NW.
 14.00 Wash, 150 lks. wide, course N. Asc. 50 ft.
 22.80 Low spur, slopes N. Desc. 30 ft.
 24.60 Wash, 30 lks. wide, course N. Asc. 10 ft. to
 39.81 Intersect the original cor. of Ts.1 and 2 S., Rs.4 and
 5 W., which is a granite stone 4x8x8 ins. above ground,
 firmly set, mkd. and witnessed as described in the
 official record.
 Reconstruct this cor. monument as follows:
 alongside the old stone, set an iron post, 3 ft. long,
 3 ins. in diam., 18 ins. in the ground to bedrock, and
 raise a mound of stone around post, for cor. of
 Ts.1 and 2 S., Rs.4 and 5 W., with brass cap mkd.

T1S
 R5W | R4W
 S36 | S31
 S1 | S6

T2S

1931

from which

- a paloverde, 3 ins. in diam., brs. N.54½°E., 50 lks.
dist., mkd T1S R4W S31 BT
- a paloverde, 4 ins. in diam., brs. S.52°E., 131 lks.
dist., mkd. T2S R4W S6 BT
- a paloverde, 4 ins. in diam., brs. S.15½°W., 104 lks.
dist., mkd. T2S R5W S1 BT
- a paloverde, 4 ins. in diam., brs. N.11½°W., 44 lks.
dist., mkd. T1S R5W S36 BT

Land, hilly.

Soil, gravelly and rocky loam, 4th rate.

Timber, paloverde, ironwood, mesquite, and catclaw.

Undergrowth, same, with greasewood, cacti, and ocotillo.

Resurvey of the East boundary of T.2 S., R.5 W.

Chains	<p>The south two and one half miles of the East bdy. of T.2 S., R.5 W. were surveyed due North by S.W. Foreman, U.S.D.S. in 1871 establishing common reference cors. thereon at 40 ch. intervals, in connection with a survey of a part of the subdivision lines of said Tp. This portion of the Tp. bdy. was independently resurveyed in 1882 by R.C. Powers, U.S.D.S. in a position about 37 chs. East from its original position, and said deputy surveyor surveyed the remainder of said Tp. bdy. in the same year. His resurvey and survey was initiated from cor. of Ts. 2 S., Rs. 4 & 5 W. which he reestablished on the N. bdy. of T.3 S., R.4 W. at a point due south from the cor. of Ts. 1 & 2 S., Rs. 4 & 5 W., established by him in same year by survey of same range line south from closing cor. at theoretical point on the G. & S.R. Base Line.</p> <p>Deputy surveyor Powers reestablished and established all cors. on this Tp. bdy. with common reference, at 40 ch. intervals counting from the south.</p> <p>No other resurvey, or any retracement, of any part of this Tp. bdy. is of record.</p> <p>The following notes describe a dependent resurvey of the entire line, reconstructing all of the existing cors. in their original positions by setting brass-capped iron posts alongside, and altering all of said cors. to refer to areas W. of line only.</p> <p style="text-align: center;">----- Retracement for Resurvey. -----</p> <p>From the original cor. of Ts. 1 & 2 S., Rs. 4 & 5 W., reconstructed as hereinbefore described,</p> <p>40.40 South, on random line, on E. bdy. of sec. 1 (N. $\frac{3}{4}$) Fall 36 lks. W. of original $\frac{1}{4}$ sec. cor. of secs. 1 & 6. True course and dist.: - N. 0° 31' W., 40.40 chs. Thence</p> <p>39.91 South, on random line, on E. bdy. of sec. 1 (S. $\frac{3}{4}$) Fall 26 lks. W. of original cor. of secs. 1, 6, 7 & 12. True course and dist.: - N. 0° 22' W., 39.91 chs. -----</p> <p>39.87 From sec. cor., South, on random line, on E. bdy. of sec. 12 (N. $\frac{1}{4}$) Fall 39 lks. W. of original $\frac{1}{4}$ sec. cor. of secs. 7 & 12. True course and dist.: - N. 0° 34' W., 39.87 chs. Thence</p> <p>39.42 South, on random line, on E. bdy. of sec. 12 (S. $\frac{1}{4}$) Fall 27 lks. W. of original cor. of secs. 7, 12, 13 & 18. True course and dist.: - N. 0° 24' W., 39.42 chs. -----</p> <p>39.03 From sec. cor., South, on random line, on E. bdy. of sec. 13 (N. $\frac{3}{4}$) Fall 10 lks. E. of original $\frac{1}{4}$ sec. cor. of secs. 13 & 18. True course and dist.: - N. 0° 09' E., 39.03 chs. Thence</p> <p>39.27 South, on random line, on E. bdy. of sec. 13 (S. $\frac{1}{4}$) Fall 5 lks. W. of original cor. of secs. 13, 18, 19 & 24. True course and dist.: - N. 0° 04' W., 39.27 chs. -----</p> <p>39.64 From sec. cor., South, on random line, on E. bdy. of sec. 24 (N. $\frac{3}{4}$) Fall 29 lks. W. of reestablished $\frac{1}{4}$ sec. cor. of secs. 19 & 24. True course and dist.: - N. 0° 25' W., 39.64 chs. Thence</p> <p>40.01 South, on random line, on E. bdy. of sec. 24 (S. $\frac{3}{4}$) Fall 12 lks. W. of reestablished cor. of secs. 19, 24, 25 & 30. True course and dist.: - N. 0° 10' W., 40.01 chs. -----</p> <p>40.01 From sec. cor., South, on random line, on E. bdy. of sec. 25 (N. $\frac{3}{4}$) Fall 20 lks. W. of reestablished $\frac{1}{4}$ sec. cor. of secs. 25 & 30. True course and dist.: - N. 0° 17' W., 40.01 chs.</p>
--------	--


Resurvey of the East boundary of T.2 S., R.5 W.

- Chains Thence
- 40.08 South, on random line, on E. bdy. of sec. 25 (S. $\frac{1}{2}$)
Fall 13 lks. W. of reestablished cor. of secs. 25, 30,
31 & 36.
True course and dist.: - N.0°11'W., 40.08 chs.
- 40.00 From sec. cor.,
South, on random line, on E. bdy. of sec. 36 (N. $\frac{1}{2}$)
Fall 5 lks. W. of reestablished $\frac{1}{4}$ sec. cor. of secs. 31
and 36.
True course and dist.: - N.0°04'W., 40.00 chs.
- 42.17 Thence,
South, on random line, on E. bdy. of sec. 36 (S. $\frac{1}{2}$)
Fall 5 lks. W. of reestablished cor. of Ts. 2 S., Rs. 4
and 5 W.
True course and dist.: - N.0°04'W., 42.17 chs.

Resurvey.

The previously reestablished cor. of Ts. 2 S., Rs. 4 and 5 W. is a mound of earth with remains of a wood post in center. A portion of the post bearing some of the record markings is lying on the ground alongside the mound, and traces of pits are visible N., S., E. and W. of cor. No bearing trees.


Reconstruct this cor. monument as follows:
remove the mound and in center of its position reset the marked portion of the old wood post 4 ins. square projecting 6 ins. above ground, and alongside same set an iron post, 3 ft. long, 3 ins. in diam., 26 ins. in the ground, for cor. of Ts. 2 S., Rs. 4 and 5 W., with brass cap mkd.



1931

No bearing trees available.
Dig pits 18x18x12 ins., E., W., and N. of cor. 3 ft. dist.

- Thence
- N.0°04'W., on true line, on E. bdy. of sec. 36 (S. $\frac{1}{2}$)
Over rolling land, thru scattering timber and undergrowth with patches of dense undergrowth.
- 2.37 Intersect fence cor. from which wire fences extend N. and W. Thence along wire fence.
- 42.17 Intersect the reestablished $\frac{1}{4}$ sec. cor. of secs. 31 & 36, which is a decayed wood post, 3 ins. square, set in a mound of earth. Marks obliterated. Faint traces of pits N. and S. of cor. No bearing trees.
Reconstruct this cor. monument and alter its reference as follows:
remove the mound and in center of its position, reset the old wood post with 6 ins. projecting, and alongside same set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 36 only, with brass cap mkd.



1931

No bearing trees available.
Dig pits 18x18x12 ins., N. and S. of cor., 3 ft. dist.

Resurvey of the East boundary of T.2 S., R.5 W.

Chains	Thence N.0°04'W., on true line, on E. bdy. of sec. 36 (N. $\frac{1}{2}$) Over rolling land, thru scattering timber and undergrowth along wire fence.				
40.00	Intersect the previously reestablished cor. of secs. 25, 30, 31 and 36 which is a fence cor. from which wire fences extend W. and S. Faint traces of pits. Part of the mesquite cor. post, 4 ins. square, illegibly mkd. is lying on the ground alongside the fence post. Reconstruct this cor. monument and alter its reference as follows: alongside the fence cor., reset the portion of the mesquite cor. post, and alongside same set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground for reestablished cor. of secs. 25 and 36 only, with brass cap mkd.				
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>T2S</td></tr> <tr><td>S25</td></tr> <tr><td style="border-top: 1px solid black;">S36</td></tr> <tr><td>R5W</td></tr> </table>	T2S	S25	S36	R5W
T2S					
S25					
S36					
R5W					
	1931				
	from which a mesquite, 4 ins. in diam., brs. S. 65 $\frac{1}{2}$ °W., 96 lks. dist., mkd. T2S R5W S36 BT a mesquite, 6 ins. in diam., brs. N. 52 $\frac{1}{4}$ °W., 71 lks. dist., mkd. T2S R5W S25 BT				
	Land, rolling. Soil, gravelly loam, 2nd and 3rd rate. Timber, paloverde, mesquite and catclaw. Undergrowth, same, with greasewood, cacti and ocotillo.				

	From cor. of secs. 25 and 36, N.0°11'W., on true line, on E. bdy. of sec. 25 (S. $\frac{1}{2}$) Over rolling land, thru scattering timber and patches of dense undergrowth.				
4.80	Road, brs. NE.-SW.				
8.00	Same road, brs. NW.-SE.				
30.00	Enter wash, course SW. from N. Thence in wash.				
38.00	Leave wash, course S. from NE.				
40.08	Intersect the previously reestablished $\frac{1}{4}$ sec. cor. of secs. 25 and 30, which is a decayed wood post, broken off at surface of ground, upper portion mkd. $\frac{1}{4}$ lying on ground alongside. Cor. is witnessed by one of the two original bearing trees: a mesquite 24 ins. in diam., S. 79 $\frac{1}{2}$ °E., 46 lks. dist., mkd. $\frac{1}{4}$ S Find no trace of the record NE. bearing tree. Reconstruct this cor. monument and alter its reference as follows: alongside the stub of the old wood cor. post, reset the mkd. upper portion, and alongside same, set an iron post 3 ft. long, 1 in. in diam., 27 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 25 only, with brass cap mkd.				
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>$\frac{1}{4}$</td></tr> <tr><td>S 25</td></tr> </table>	$\frac{1}{4}$	S 25		
$\frac{1}{4}$					
S 25					
	1931				
	from which a mesquite, 8 ins. in diam., brs. S. 4°W., 61 lks. dist., mkd. $\frac{1}{4}$ S 25-BT No other bearing tree available. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.				
	Thence N.0°17'W., on true line, on E. bdy. of sec. 25 (N. $\frac{1}{2}$) Over rolling land, thru patches of scattering timber and dense undergrowth.				
40.01	Intersect the previously reestablished cor. of secs. 19, 24, 25, and 30, which is a granite stone 5x5x8 ins. above				

Resurvey of the East boundary of T.2 S., R.5 W.

Chains

ground, firmly set, mkd. and witnessed as described in the official record.

Reconstruct this cor. monument and alter its reference as follows:

alongside the old stone, set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground, for reestablished cor. of secs. 24 and 25 only, with brass cap mkd.

T2S
S24
S25
R5W

1931

from which

a paloverde, 12 ins. in diam., bts. S. 71 1/2° W., 147 lks. dist., mkd. T2S R5W S25 BT
an ironwood, 8 ins. in diam., brs. N. 38 1/2° W., 130 lks. dist., mkd. T2S R5W S24 BT

Land, rolling.
Soil, gravelly and rocky loam, 3rd rate.
Timber, paloverde, ironwood, mesquite, and catclaw.
Undergrowth, same, with cacti, greasewood, and ocotillo.

27.10

From cor. of secs. 24 and 25, N. 0° 10' W., on true line, on E. bdy. of sec. 24 (S. 1/4)
Over rolling land, thru scattering timber and undergrowth.
Wash, 10 lks. wide, course SW.

40.01

Intersect the previously reestablished 1/4 sec. cor. of secs. 19 and 24, which is a quartz stone 10x8x10 ins. above ground, firmly set, mkd. and witnessed as described in the official record.

Reconstruct this cor. monument and alter its reference as follows:

alongside old stone, set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 24 only, with brass cap mkd.

1/4
S 24

1931

from which

a paloverde, 6 ins. in diam., brs. N. 55 1/2° W., 71 lks. dist., mkd. 1/4 S 24 BT
No other bearing tree available.
Rebuild the old mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Thence N. 0° 25' W., on true line, on E. bdy. of sec. 24 (N. 1/4)
Over rolling and hilly land, thru scattering timber and undergrowth.

20.00

Enter Buckeye Hills. Asc. 215 ft. over steep SW. slope.

31.50

Rocky spur, slopes SE. Desc. 160 ft. to

39.64

Intersect the original cor. of secs. 13, 18, 19, and 24, which is a granite stone 12x10x10 ins. above ground, firmly set, mkd. and witnessed as described in the official record.

Reconstruct this cor. monument and alter its reference as follows:

alongside old stone, set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, and raise a mound of stone around post, for cor. of secs. 13 and 24 only, with brass cap mkd.

Resurvey of the East boundary of T.2 S., R.5 W.

Chains

T2S
S13
S24
R5W

1931

from which
a paloverde, 4 ins. in diam., brs. S. 71 $\frac{1}{4}$ ° W., 129 lks.
dist., mkd. BT only.
a paloverde, 4 ins. in diam., brs. N. 34° W., 102 lks.
dist., mkd. T2S R5W S13 BT

Land, S. $\frac{1}{2}$ rolling; N. $\frac{1}{2}$ hilly.
Soil, gravelly and rocky loam, 3rd and 4th rate.
Timber, paloverde, ironwood, mesquite, and catclaw.
Undergrowth, same, with greasewood, cacti, and ocotillo.

From the cor. of secs. 13 and 24,
N. 0° 04' W., on true line, on E. bdy. of sec. 13 (S. $\frac{1}{2}$)
Over mountainous land, thru scattering timber and
undergrowth.

Desc. 10 ft. over NE. slope.

- 1.20 Wash, 10 lks. wide, course SE. Asc. 160 ft.
- 15.00 Rocky spur, slopes SE. Desc. 95 ft.
- 35.00 Gully, course SE. Asc. 110 ft. over SW. slope to
- 39.27 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 13 and 18,
which is a granite stone 4x6x8 ins. above ground, firmly
set, mkd. and witnessed as described in the official
record.
Reconstruct this cor. monument and alter its reference
as follows:
alongside old stone, set an iron post, 3 ft. long,
1 in. in diam., over a cross (X) mkd. on rock ledge,
and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor.
of sec. 13 only, with brass cap mkd.

$\frac{1}{4}$
S 13

1931

No bearing trees available.

Thence
N. 0° 09' E., on true line, on E. bdy. of sec. 13 (N. $\frac{1}{2}$)
Over mountainous land, thru scattering timber and under-
growth.

Asc. 105 ft. over SW. slope.

- 2.20 Top of granite peak, slopes SE. Desc. 90 ft.
- 7.00 Gully, course SE. Asc. 75 ft.
- 10.00 Rocky spur, slopes E. Desc. 25 ft. over broken NE. slope.
- 26.20 Gully, course SE. Asc. 160 ft. to
- 39.03 Intersect the original cor. of secs. 7, 12, 13 and 18,
which is a granite stone 6x12x20 ins., firmly set in a
mound of stone, mkd. as described in the official
record. No accessories.
Reconstruct this cor. monument and alter its reference
as follows;
remove the mound and in center of its position reset
old cor. stone 12 ins. in the ground, and alongside
same set an iron post, 3 ft. long, 2 ins. in diam.,
12 ins. in the ground to bedrock, over a cross (X) mkd.
thereon, and raise a mound of stone around post, for
cor. of secs. 12 and 13 only, with brass cap mkd.

T2S
S12
S13
R5W

1931

Resurvey of the East boundary of T.2 S., R.5 W.

Chains

from which
a paloverde, 5 ins.in diam., brs. N.62 $\frac{1}{4}$ °W., 56 lks.
dist., mkd. T2S R5W S12 BT
No other bearing tree available.

Land, mountainous.
Soil, gravelly and rocky loam, 4th rate.
Timber, paloverde, ironwood, mesquite, and catclaw.
Undergrowth, same, with greasewood, cacti, and ocotillo.

From the cor. of secs.12 and 13,
N.0°24'W., on true line, on E. bdy. of sec.12 (S. $\frac{1}{2}$)
Over mountainous land, thru scattering timber and under-
growth.
Asc. 300 ft. over cliffy SE. slope.

- 5.65 Top of ridge of Buckeye Hills, brs. E.-W.
Desc. 480 ft. over cliffy, rocky slope N. to NE.
- 35.80 Wash, 15 lks. wide, course NW.
- 39.42 Intersect the original $\frac{1}{4}$ sec.cor. of secs.7 and 12,
which is a granite stone 7x10x15 ins. above ground,
firmly set, mkd. and witnessed as described in the
official record.
Reconstruct this cor.monument and alter its reference
as follows:
alongside old stone, set an iron post, 3 ft. long,
1 in.in diam., 28 ins.in the ground, for $\frac{1}{4}$ sec. cor.
of sec.12 only, with brass cap mkd.

$\frac{1}{4}$
S 12
1931

from which
a paloverde, 4 ins.in diam., brs. S.69°W., 173 lks.
dist., mkd. $\frac{1}{4}$ S 12 BT
a paloverde, 4 ins.in diam., brs. N.34°W., 242 lks.
dist., mkd. $\frac{1}{4}$ S 12 BT

Thence
N.0°34'W., on true line, on E. bdy. of sec.12 (N. $\frac{1}{2}$)
Over mountainous land, thru scattering timber and under-
growth.

- 8.90 Wash, 20 lks. wide, course NW.
- 10.60 Miner's cabin, brs. E. about 2 chs. dist.
- 13.30 Wash, 30 lks.wide, course SW. Asc.125 ft. over SE.slope.
- 21.00 Spur, slopes SW. Desc. 170 ft. to sec.cor.
- 33.40 Wash, 20 lks. wide, course NW.
- 39.87 Intersect the original cor. of secs. 1,6,7 and 12,
which is a granite stone 4x10x8 ins.above ground,
firmly set, mkd. and witnessed as described in the
official record.
Reconstruct this cor.monument and alter its reference
as follows:
alongside old stone, set an iron post, 3 ft.long,
2 ins.in diam., 28 ins.in the ground, for cor.of secs.
1 and 12 only, with brass cap mkd.

T2S
S1
S12
R5W

1931

from which
an ironwood, 4 ins.in diam., brs. S.73°W., 137 lks.
dist., mkd. BT only.
a paloverde, 4 ins.in diam., brs. N.41°W., 84 lks.
dist., mkd. T2S R5W S1 BT

Land, mountainous.
Soil, gravelly and rocky loam, 4th rate.

Resurvey of the East boundary of T.2 S., R.5 W.

Chains	<p>Timber, paloverde, ironwood, and mesquite. Undergrowth, same, with greasewood, cacti, and ocotillo.</p> <hr/> <p>From the cor. of secs. 1 and 12, N.0°22'W., on true line, on E. bdy. of sec.1 (S.½) Over hilly land, thru scattering timber and undergrowth. Desc. gradually over NW. slope.</p> <p>10.70 Wash, 40 lks. wide, course NW. Continue descent. 32.20 Wash, 50 lks. wide, course NE. Road in wash, brs. NE.-SW. 33.90 Drain, course E. 39.91 Intersect the original ¼ sec.cor. of secs. 1 and 6, which is a granite stone 6x4x10 ins. above ground, firmly set, mkd. and witnessed as described in the official record. Reconstruct this cor.monument and alter its reference as follows: alongside old stone, set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for ¼ sec.cor. of sec.1 only, with brass cap mkd.</p> <p style="text-align: center;">¼ S I 1931</p> <p>No bearing trees available. Rebuild mound of stone, 3 ft. base, 2 ft. high, W. of cor. Thence N.0°31'W., on true line, on E. bdy. of sec.1 (N.½) Over hilly land, thru scattering timber and undergrowth.</p> <p>0.10 Small drain, course E. Asc. 115 ft. 12.70 Spur, slopes E. Desc. 95 ft. to 40.40 Intersect the original cor. of Ts.1 & 2 S., Rs.4 & 5 W., reconstructed as hereinbefore described.</p> <p>Land, hilly. Soil, gravelly and rocky loam, 4th rate. Timber, paloverde, ironwood, mesquite, and catclaw. Undergrowth, same, with greasewood, cacti, and ocotillo.</p> <hr/> <p>Final Test of Young & Son's transit No.8487.</p> <p>February 19, 1931: at camp near cor. of secs. 5, 6, 7 and 8, T.3S., R.4 W., G. & S.R. B. & M., Ariz., lat. 33°11'13"N., longitude 112°42'10"W., every hour from 7 to 11 a.m., and from 1 to 5 p.m. make proper settings on the arcs of the solar attachment and find that the resulting orientation of the instrument when compared with the true meridian determined at this station by Polaris observations Feb.18, 1931 as hereinbefore described, has a maximum error of less than 30".</p> <hr/> <p>The continued satisfactory adjustment of the solar apparatus of Gurley transit No.20120 is indicated from field tests of same described in Book "E" of this group. (Field notes T.4S.-R.4W.)</p> <hr/>
--------	--

Survey of the East bdy. of T. 2 S., R. 4 W.

Chains

The following notes describe the survey of the east bdy. of T. 2 S., R. 4 W., establishing cors. thereon with reference to this Tp. only and giving intersections to cors. referring to T. 2 S., R. 3 W., described in book "B" of this group.

From the reestablished cor. of townships 2 & 3 S., R. 4 W., only, described in book "D" of this Group.

7.30
3.50
6.50
18.00
23.80
35.60
40.00

North, on true line, on E. bdy. of sec. 36.
Over rolling land, thru scattering timber & undergrowth. Wash, 10 lks. wide, course NW.
Asc. slight SW slope.
Tip of spur, brs. W.
Wash, 5 lks. wide, course NW.
Wash, 10 lks. wide, course NW.
Wash, 10 lks. wide, course NW.
Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the 1/4 sec. cor. of sec. 36 only, with brass cap mkd.

1/4 S36

1931


No bearing trees available; dig pits 18 x 18 x 12 ins. N.-S. of cor. 3 ft. distant.

42.69

Intersect the 1/4 sec. cor. of sec. 31, T. 2 S., R. 3 W., described in book "B" of this group.

80.00

Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in the ground for the cor. of secs. 25 & 36, only, with brass cap mkd.



1931

No bearing trees available; raise a mound of stone 3 ft. base, 2 ft. high W. of cor. 3 ft. distant.

Land, rolling.
Soil, sandy loam, 2nd. rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and cacti.

0.10
2.69
25.30
34.50
40.00

North, on true line, on E. bdy. of sec. 25.
Over rolling land, thru scattering timber & undergrowth. Road, brs. NE-SW. Along east side of cleared land.
Intersect the cor. of secs. 30 & 31, T. 2 S., R. 3 W., described in book "B" of this group.

Wash, 10 lks. wide, course NW.
Wash, 10 lks. wide, course NW.
Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the 1/4 sec. cor. of sec. 25 only, with brass cap mkd.

1/4 S25

1931

No bearing trees available.
Dig pits 18 x 18 x 12 ins. N.-S. of cor. 3 ft. distant.

42.69

Intersect the 1/4 sec. cor. of sec. 30, T. 2 S., R. 3 W., described in book "B" of this group.

Survey of the East Bdy. of T. 2 S., R. 4 W.

Chains

72.30 Wash, 5 lks. wide, course NW.
 72.50 Leave cleared land, brs. West.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in the ground for the cor. of secs. 24 & 25, only, with brass cap mkd.

T2S	T2S
R4W	R3W
S24	S30
S25	

1931

No bearing trees available; dig pits 18 x 18 x 12 ins. NW and SW of cor.

Land, rolling.
 Soil, sandy loam; 2nd. rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and cacti.

2.69

North, on true line, on E. bdy. of sec. 24.
 Over rolling land, thru scattering timber & undergrowth.
 Intersect the cor. of secs. 19 and 30, T. 2 S., R. 3 W., described in book "B" of this group.

6.70
40.00

Wash, 5 lks. wide, course NW.
 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. of sec. 24, only, with brass cap mkd.

$\frac{1}{4}$ S24	
-------------------	--

1931

No bearing trees available; dig pits 18 x 18 x 12 ins. N-S. of cor. 3 ft. distant.

42.69

Intersect the $\frac{1}{4}$ sec. cor. of sec. 19, T. 2 S., R. 3 W., described in book "B" of this group.

44.00

Wash, 10 lks. wide, course NW.

53.80

Wash, 10 lks. wide, course NW.

61.50

Center of wash, 100 lks. wide, course SW.

80.00

Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in the ground for the cor. of secs. 13 & 24 only, with brass cap mkd.

T2S	T2S
R4W	R3W
S13	S19
S24	

1931

No bearing trees available; dig pits 18 x 18 x 12 ins. NW and SW of cor. 3 ft. distant.

Land, rolling.
 Soil, sandy loam, 2nd. rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and cacti.

Chains

2.69 North, on true line, on E. bdy. of sec. 13.
 Over rolling land, thru scattering timber & undergrowth.
 Intersect the cor. of secs. 18 and 19, T.2 S., R.3 W.,
 described in book "B" of this group.
 21.20 Center of wash, 100 lks. wide, course W.
 33.50 Shallow wash, 2 chs. wide, course W.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for the $\frac{1}{4}$ sec. cor. of sec. 13 only, with
 brass cap mkd.

$\frac{1}{4}$ S13

1931

No bearing trees available; dig pits 18 x 18 x 12 ins.
N-S. of cor. 3 ft. distant.

42.69 Intersect the $\frac{1}{4}$ sec. cor. of sec. 18, T. 2 S. R. 3 W.,
 described in book "B" of this group.

78.90 Cleared road, brs. E-W.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in
 the ground for the cor. of secs. 12 & 13, with brass
 cap mkd.

T2S	T2S
R4W	R3W
S12	S18

S13

1931

No bearing trees available; dig pits 18 x 18 x 12 ins.
NW and SW of cor. 3 ft. distant.

Land, rolling.
 Soil, sandy loam, 2nd. rate.
 Timber, paloverde & ironwood.
 Undergrowth, greasewood and cacti.

2.69 North, on true line, on E. bdy. of sec. 12.
 Over rolling land, thru scattering timber & undergrowth.
 Intersect the cor. of secs. 7 and 18, T. 2 S., R. 3 W.,
 described in book "B" of this group.

35.00 Ridge, brs. E-W.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for the $\frac{1}{4}$ sec. cor. of sec. 12, only, with
 brass cap mkd.

$\frac{1}{4}$ S12

1931

No bearing trees available; raise a mound of stone
4 ft. base, 2 ft. high W. of cor. 3 ft. distant.

42.69 Intersect the $\frac{1}{4}$ sec. cor. of sec. 7, T. 2 S., R. 3 W.,
 described in book "B" of this group.

60.10 Road, brs. NE-SW.
 70.00 Asc. gradual S. slope.
 77.00 Low spur, brs. W. Desc. gradual N. slope.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 29 ins. in
 the ground to bedrock, deposit a stone mkd. with a
 cross (X) at base of post, raise a mound of stone
 about post, for the cor. of secs. 1 & 12, with brass
 cap mkd.

T2S	T2S
R4W	R3W
S1	S7

S12

1931


No bearing trees available.

Survey of the East Bdy. of T. 2 S., R. 4 W.

Chains

Land, rolling.
Soil, sandy and stony, 2nd. and 3rd. rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and cacti.

- 2.69 North, on true line, on E. bdy. of sec. 1.
Over rolling land, thru scattering timber & undergrowth.
Intersect the cor. of secs. 6 and 7, T. 2 S., R. 3 W.,
described in book "B" of this group.
- 35.00 Wash, 10 lks. wide, course SE.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 14 ins. in
the ground to bedrock, deposit a stone mkd. with a
cross (X) at base of post, raise a mound of stone
about post, for the 1/4 sec. cor. of sec. 1 only, with
brass cap mkd.
- 1/4 S1
- 1931 from which,
- a paloverde, 12 ins. in diam., brs. N.44°W., 187 lks.
dist., mkd. 1/4 S1 BT
- a paloverde, 12 ins. in diam., brs. S.47°W., 70 lks.
dist., mkd. 1/4 S1 BT
- 42.69 Intersect the 1/4 sec. cor. of sec. 6, T. 2 S., R. 3 W.,
described in book "B" of this group.
- 45.00 Wash, 5 lks. wide, course SE.
- 54.50 Wash, 20 lks. wide, course E.
- 55.80 Road, brs. E-W.
- Asc. 45 ft. over S. slope.
- 61.40 Spur, brs. E. Desc. 38 ft. over N. slope.
- 64.80 Wash, 10 lks. wide, course E.
- Asc. gradual S. slope.
- 70.90 Spur, brs. NE.
- 82.32 Intersect the S. bdy. of sec. 36, T. 1 S., R. 4 W., at
4.77 chs. east of the 1/4 sect. cor. of said sec., here-
inbefore described.
- At point of intersection set an iron post 3 ft. long,
3 ins. in diam., 14 ins. in the ground to bedrock,
deposit a stone mkd. with a cross (X) at base of post,
raise a mound of stone about post, for the closing
cor. of Ts. 2 S., Rs. 3 and 4 W., with brass cap mkd.



Land, rolling.
Soil, sandy and rocky loam, 3rd. rate.
Timber, paloverde and cacti.
Undergrowth, greasewood and cacti.

Survey of the Subdivision Lines of T. 2 S., R. 4 W.

Chains	<p>From the cor. of secs. 1, 2, 35 & 36, on S. bdy. of Tp., described in book "D" of this group.</p> <p>N.0°01'W., on true line, bet. secs. 35 & 36.</p> <p>0.10 House, brs. N.37½°W.</p> <p>7.50 Road, brs. NW-SE.</p> <p>11.20 Wash, 10 lks. wide, course NW.</p> <p>25.00 Enter cleared land; brs. E-W.</p> <p>28.00 Road, brs. NE-SW.</p> <p>31.00 Leave clearing, brs. E-W.</p> <p>35.80 Wash, 10 lks. wide, course NW.</p> <p>40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the ¼ sec. cor. of secs. 35 & 36, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td colspan="2">¼</td></tr> <tr><td>S35</td><td>S36</td></tr> </table> </div> <p>1931 from which,</p> <p>an ironwood, 8 ins. in diam., brs. S.77°E., 114 lks. dist., mkd. ¼ S36 BT</p> <p>an ironwood, 10 ins. in diam., brs. S.24°W., 43 lks. dist., mkd. ¼ S35 BT</p> <p>51.80 Wash, 10 lks. wide, course NW.</p> <p>60.00 Same house, brs. S.25¾°W.</p> <p>72.70 Wash, 10 lks. wide, course NW.</p> <p>80.00 Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in the ground for the cor. of secs. 25, 26, 35 and 36, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td>T2S</td><td>R4W</td></tr> <tr><td>S26</td><td>S25</td></tr> <tr><td>S35</td><td>S36</td></tr> </table> </div> <p>1931 from which,</p> <p>a paloverde, 8 ins. in diam., brs. N.14°W., 168 lks. dist., mkd. T2S R4W S26 BT</p> <p>a paloverde, 6 ins. in diam., brs. N.23½°E., 312 lks. dist., mkd. T2S R4W S25 BT</p> <p>an ironwood, 12 ins. in diam., brs. S.64°E., 493 lks. dist., mkd. T2S R4W S36 BT</p> <p>a paloverde, 16 ins. in diam., brs. S.89½°W., 368 lks. dist., mkd. T2S R4W S35 BT</p> <p>Land, rolling. Soil, sandy loam, 2nd. rate. Timber, paloverde and ironwood. Undergrowth, greasewood and cacti.</p> <hr style="border-top: 1px dashed black;"/> <p>S.89°44'E., on random line, bet. secs. 25 & 36.</p> <p>40.00 Set temp. ¼ sec. cor.</p> <p>79.92 Fall 4 lks. S. of the cor. of secs. 25 & 36, on E. bdy. of Tp., hereinbefore described.</p> <p>Thence,</p> <p>N.89°46'W., on true line, bet. secs. 25 & 36.</p> <p>Over rolling land, thru scattering timber & undergrowth.</p> <p>0.30 Road, brs. NE-SW.</p> <p>12.00 Wash, 5 lks. wide, course NW.</p> <p>39.96 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the ¼ sec. cor. of secs. 25 & 36, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td>¼</td><td>S 25</td></tr> <tr><td></td><td>S 36</td></tr> </table> </div> <p>1931 from which,</p>	¼		S35	S36	T2S	R4W	S26	S25	S35	S36	¼	S 25		S 36
¼															
S35	S36														
T2S	R4W														
S26	S25														
S35	S36														
¼	S 25														
	S 36														

Survey of the Subdivision Lines of T. 2 S., R. 4 W.

Chains

a paloverde, 14 ins. in diam., brs. N.79 $\frac{1}{2}$ °W., 340
lks. dist., mkd. $\frac{1}{4}$ S25 BT
a paloverde, 6 ins. in diam., brs. S.10 $\frac{3}{4}$ °W., 272
lks. dist., mkd. $\frac{1}{4}$ S36 BT
House (A) brs. N.43°20'W.
House (B) brs. N.24 $\frac{1}{2}$ °W.

45.10 Wash, 10 lks. wide, course NW.
59.80 Wash, 10 lks. wide, course NW.
64.70 Road, brs. N-S.
73.90 Wash, 5 lks. wide, course NW.
79.92 Along S. edge of cleared land.
The cor. of secs. 25, 26, 35 and 36.

Land, rolling.
Soil, sandy loam, 2nd. rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and cacti.

20.80 N.0°01'W., on true line, bet. secs. 25 & 26.
38.10 Over molling land, thru scattering timber & undergrowth.
40.00 Across cleared land, brs. E-W.
Leave cleared land, brs. E-W.
Wash, 10 lks. wide, course NW.
Set an iron post 3 ft. long, 1 in. in diam., 26 ins.
in the ground for the $\frac{1}{4}$ sec. cor. of secs. 25 & 26,
with brass cap mkd.

$\frac{1}{4}$
 S26 | S25

1931 from which,

a paloverde, 10 ins. in diam., brs. N.39 $\frac{1}{2}$ °E., 268
lks. dist., mkd. $\frac{1}{4}$ S25 BT
an ironwood, 8 ins. in diam., brs. S.14°W., 287 lks.
dist., mkd. $\frac{1}{4}$ S26 BT
House (A) brs. N.26 $\frac{1}{2}$ °W.,
House (B) brs. N.85°E.

40.20 Enter cleared land, brs. E-W.
40.40 Road, brs. NW-SE.
42.90 Wash, 10 lks. wide, course NW.
50.00 Leave cleared land, brs. E-W.
50.10 Wash, 10 lks. wide, course NW.
60.00 Enter cleared land, brs. E-W.
70.80 Wash, 5 lks. wide, course W.
80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins.
in the ground for the cor. of secs. 23, 24, 25 &
26, with brass cap mkd.


T2S R4W
 S23 | S24
 S26 | S25

1931

No bearing trees available; dig pits 18 x 18 x 12 ins.
NW, NE, SE and SW of cor.
Land, rolling.
Soil, sandy loam, 2nd. rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and cacti.

Survey of the Subdivision Lines of T. 2 S., R. 4 W.


Chains
 40.00 S.89°46'E., on a random line, bet. secs. 24 and 25.
 79.92 Set temp. 1/4 sec. cor.
 Intersect the cor. of secs. 24 & 25, on E. bdy. of Tp.,
 hereinbefore described.
 Thence,
 N.89°46'W., on true line, bet. secs. 24 & 25.
 16.80 Over rolling land, thru scattering timber & undergrowth.
 29.90 Wash, 10 lks. wide, course NW.
 39.96 Wash, 10 lks. wide, course NW.
 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for the 1/4 sec. cor. of secs. 24 & 25, with
 brass cap mkd.



1931 from which,
 a house, brs. N.5°W., about 12 chs. distant.
 No bearing trees available; dig pits 18 x 18 x 12 ins.
 E. and W. of cor. 3 ft. distant.


47.10 Road, brs. NE-SW.
 54.25 Wash, 10 lks. wide, course NW.
 64.05 Wash, 10 lks. wide, course NW.
 79.92 The cor. of secs. 23, 24, 25 & 26.
 Land, rolling.
 Soil, sandy loam, 2nd. rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and cacti.

9.00 N.0°01'W., on true line, bet. secs. 23 and 24.
 11.30 Over rolling land, thru scattering timber & undergrowth.
 23.10 Leave cleared land, brs. E-W.
 24.90 Wash, 10 lks. wide, course NW.
 27.00 Wash, 20 lks. wide, course NW.
 39.30 Enter big wash, course SW.
 40.00 Leave big wash.
 Cleared road, brs. E-W.
 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for the 1/4 sec. cor. of secs. 23 & 24, with
 brass cap mkd.



1931
 No bearing trees available; dig pits 18 x 18 x 12 ins.
 N. and S. of cor. 3 ft. distant.

72.90 Wash, 20 lks. wide, course W.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in
 the ground for the cor. of secs. 13, 14, 23 & 24, with
 brass cap mkd.



1931 from which,
 a paloverde, 6 ins. in diam., brs. N.79 1/2°W., 483 lks.
 dist., mkd. T2S R4W S14 BT
 a paloverde, 6 ins. in diam., brs. N.10 1/2°E., 235 lks.
 dist., mkd. T2S R4W S13 BT

Survey of the Subdivision Lines of T. 2 S., R. 4 W.

Chains

a paloverde, 4 ins. in diam., brs. S.47 $\frac{1}{2}$ °E., 62 lks.
dist., mkd. BT only.
a paloverde, 8 ins. in diam., brs. S.28 $\frac{1}{2}$ °W., 343 lks.
dist., mkd. T2S R4W S23 BT

Land, rolling.
Soil, sandy loam, 2nd. rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and cacti.

40.00

S.89°46'E., on random line, bet. secs. 13 & 24.

79.92

Set temp. $\frac{1}{4}$ sec. cor.Fall 2 lks. S. of the cor. of secs. 13 and 24, on E. bdy.
of Tp., hereinbefore described.

Thence,

N.89°47'W., on true line, bet. secs. 13 and 24.

30.30

Over rolling land, thru scattering timber & undergrowth.

39.96

Road, brs. NE-SW.

Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
the ground for the $\frac{1}{4}$ sec. cor. of secs. 13 & 24,
with brass cap mkd.
$$\begin{array}{r} \frac{1}{4} \text{ S } 13 \\ \frac{1}{4} \text{ S } 24 \\ \hline 1931 \end{array}$$

Dig pits 18 x 18 x 12 ins. E. and W. of cor. 3 ft. distant.
No bearing trees available.

67.80

Wash, 10 lks. wide, course SW.

72.50

Wash, 10 lks. wide, course SW.

79.92

The cor. of secs. 13, 14, 23 & 24.

Land, rolling.
Soil, sandy loam, 2nd. rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and cacti.

20.00

N.0°01'W., on true line, bet. secs. 13 & 14.

40.00

Over rolling land, thru scattering timber & undergrowth.

Cleared road, brs. E-W.

Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
the ground for the $\frac{1}{4}$ sec. cor. of secs. 13 & 14,
with brass cap mkd.
$$\begin{array}{c} \frac{1}{4} \\ \text{S14} \quad | \quad \text{S13} \end{array}$$

1931

from which,

a paloverde, 6 ins. in diam., brs. N.67 $\frac{1}{2}$ °W., 83 lks.
dist., mkd. $\frac{1}{4}$ S14 BTa paloverde, 6 ins. in diam., brs. S.5 $\frac{1}{2}$ °E., 189 lks.
dist., mkd. $\frac{1}{4}$ S13 BT

52.70

Spur, brs. SW.

Desc. 42 ft. over NW slope.

56.75

Wash, near head, course W.

62.60

Spur, brs. West. Desc. 46 ft. over N. slope.

72.50

Wash, 10 lks. wide, course SW.

80.00

Set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in
the ground to bedrock, deposit a stone mkd. with a
cross (X) at base of post, raise a mound of stone
about post, for the cor. of secs. 11, 12, 13 & 14,
with brass cap mkd.

Survey of the Subdivision Lines of T. 2 S., R. 4 W.

Chains

T2S	R4W
S11	S12
S14	S13

1931

No bearing trees available.

Land, rolling.
 Soil, sandy loam, 2nd. rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and cacti.

40.00
79.92

S.89°47'E., on a random line, bet. secs. 12 and 13.
 Set temp. $\frac{1}{4}$ sec. cor.
 Fall 4 lks. N. of the cor. of secs. 12 & 13, on E. bdy.
 of Tp., hereinbefore described.

10.00
13.70
39.96

Thence,
 N.89°45'W., on true line, bet. secs. 12 & 13.
 Over rolling land, thru scattering timber & undergrowth.
 Wash, 50 lks. wide, course South.
 Road, brs. NE-SW.
 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in
 the ground to bedrock, deposit a stone mkd. with a
 cross (X) at base of post, raise a mound of stone
 about post, for the $\frac{1}{4}$ sec. cor. of secs. 12 & 13,
 with brass cap mkd.

$\frac{1}{4}$	S 12
	S 13

1931

No bearing trees available.

45.00
52.10
79.92

Low ridge, brs. NE-SW.
 Wash, 10 lks. wide, course NW.
 The cor. of secs. 11, 12, 13 and 14.

Land, rolling.
 Soil, sandy loam, 2nd. rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and cacti.

1.00
28.40
35.40
40.00

N.0°01'W., on true line, bet. secs. 11 & 12.
 Over rolling land, thru scattering timber & undergrowth.
 Road, brs. NE-SW.
 Road, brs. NW-SE.
 Road, brs. NE-SW.
 Set an iron post 3 ft. long, 1 in. in diam., 16 ins. in
 the ground to bedrock, deposit a stone mkd. with a
 cross (X) at base of post, raise a mound of stone
 about post, for the $\frac{1}{4}$ sec. cor. of secs. 11 & 12,
 with brass cap mkd.

S11	S12
-----	-----

1931

from which,
 a paloverde, 8 ins. in diam., brs. S. 20° E., 500 lks.
 dist., mkd. $\frac{1}{4}$ S12 BT
 No other bearing tree available.

Survey of the Subdivision Lines of T. 2 S., R. 4 W.


Chains							
62.00	Low spur, brs. NE.						
80.00	Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for the cor. of secs. 1, 2, 11 and 12, with brass cap mkd.						
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>T2S</td> <td>R4W</td> </tr> <tr> <td>S2</td> <td>S1</td> </tr> <tr> <td>S11</td> <td>S12</td> </tr> </table>	T2S	R4W	S2	S1	S11	S12
T2S	R4W						
S2	S1						
S11	S12						
	1931						
	No bearing trees available; raise a mound of stone 3 ft. base, 2 ft. high W. of cor. 3 ft. distant.						
	Land, rolling. Soil, sandy and rocky loam, 3rd. rate. Timber, paloverde and ironwood. Undergrowth, greasewood and cacti.						
40.00	S. 89°45'E., on random line, bet. secs. 1 and 12.						
79.92	Set temp. $\frac{1}{4}$ sec. cor. Fall 7 lks. S. of the cor. of secs. 1 and 12, on E. Bdy. of Tp., hereinbefore described.						
	Thence, N. 89°48'W., on true line, bet. secs. 1 and 12. Over rolling land, thru scattering timber & undergrowth.						
7.00	Road, brs. NE-SW.						
26.60	Road, brs. NE-SW.						
35.90	Ridge, brs. N-S. Desc. slight W. slope.						
39.96	Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. of secs. 1 and 12, with brass cap mkd.						
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>$\frac{1}{4}$</td> <td>S 1</td> </tr> <tr> <td></td> <td>S 12</td> </tr> </table>	$\frac{1}{4}$	S 1		S 12		
$\frac{1}{4}$	S 1						
	S 12						
	1931						
	a paloverde, 10 ins. in diam., brs. N. 78 $\frac{1}{2}$ °E., 63 lks. dist., mkd. $\frac{1}{4}$ S1 BT						
	a paloverde, 8 ins. in diam., brs. S. 1°W., 145 lks. dist., mkd. $\frac{1}{4}$ S12 BT						
54.42	Wash, 10 lks. wide, course NW.						
66.90	Wash, 5 lks. wide, course NW.						
78.30	Road, brs. N-S.						
79.92	The cor. of secs. 1, 2, 11 and 12.						
	Land, rolling. Soil, rocky and sandy loam, 3rd. rate. Timber, paloverde and ironwood. Undergrowth, greasewood and cacti.						
11.50	N. 0°01'W., on true line, bet. secs. 1 and 2.						
14.70	Over rolling land, thru scattering timber & undergrowth.						
40.00	Road, brs. NW and SE. Wash, 10 lks. wide, course NE. Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the $\frac{1}{4}$ sec. cor. of secs. 1 and 2, with brass cap mkd.						
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>S2</td> <td>$\frac{1}{4}$</td> <td>S1</td> </tr> <tr> <td></td> <td>1931</td> <td></td> </tr> </table>	S2	$\frac{1}{4}$	S1		1931	
S2	$\frac{1}{4}$	S1					
	1931						
	No bearing trees available.						

Survey of the Subdivision Lines of T. 2 S., R. 4 W.

Chains

41.60 Wash, 20 lks. wide, course NW.
 48.00 Wash, 20 lks. wide, course W.
 56.50 Road, brs. NE-SW.
 57.00 Wash, 20 lks. wide, course W.
 63.90 Wash, 10 lks. wide, course SW.
 69.20 Road, brs. NE-SW.
 82.37 Intersect the S. bdy. of sec. 35, T.1 S., R. 4 W., at
 5.23 chs. S.89°51'E., of the $\frac{1}{4}$ sec. cor. of said
 sec., hereinbefore described.

At point of intersection set an iron post 3 ft. long,
 2 ins. in diam., 14 ins. in the ground to bedrock,
 deposit a stone mkd. with a cross (X) at base of
 post, raise a mound of stone about post for the
 closing cor. of secs. 1 and 2, with brass cap mkd.



No bearing trees available.


Land, rolling.
 Soil, rocky and sandy 3rd. and 4th. rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and cacti.

From the reestablished cor. of secs. 2, 3, 34 and 35,
 on S. bdy. of Tp., described in book "D" of this
 Group.

N.0°01'W., on true line, bet. secs. 34 and 35.
 Over rolling desert land, thru scattering timber & under-
 growth.

Across cleared land.

4.70 Wash, 10 lks. wide, course W.
 7.00 Leave cleared land, brs. E-W.
 38.20 Wash, 10 lks. wide, course NW.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for the $\frac{1}{4}$ sec. cor. of secs. 34 & 35,
 with brass cap mkd.



1931 from which,
 an ironwood, 20 ins. in diam., brs. S.46 $\frac{1}{2}$ °E., 530
 lks. dist., mkd. $\frac{1}{4}$ S35 BT
 an ironwood, 10 ins. in diam., brs. S.37 $\frac{1}{2}$ °W., 68
 lks. dist., mkd. $\frac{1}{4}$ S34 BT
 A house brs. S.84 $\frac{1}{4}$ °E.

52.00 Wash, 5 lks. wide, course NW.
 60.40 Wash, 10 lks. wide, course NW.
 72.50 Wash, 5 lks. wide, course NW.
 75.50 Cleared road, brs. E-W.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in
 the ground for the cor. of secs. 26, 27, 34 & 35,
 with brass cap mkd.

Survey of the Subdivision Lines of T. 2 S., R. 4 W.

Chains

T2S	R4W
S27	S26
S34	S35

1931 from which,
 an ironwood, 12 ins. in diam., brs. S.43 $\frac{1}{2}$ °E., 229
 lks. dist., mkd. T2S R4W S35 BT
 an ironwood, 14 ins. in diam., brs. S.43°W., 635
 lks. dist., mkd. T2S R4W S34 BT
 No other bearing trees available.
 Dig pits 18x18x12 ins. NW, NE, SE, and SW of cor.
 Land, rolling.
 Soil, sandy loam, 2nd. rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and cacti.

40.00
80.04

S.89°44'E., on a random line, bet. secs. 26 and 35.
 Set temp. $\frac{1}{4}$ sec. cor.
 Fall 5 lks. S. of the cor. of secs. 25, 26, 35 & 36,
 Thence,
 N.89°46'W., on true line, bet. secs. 26 & 35.
 Over rolling land, thru scattering timber & undergrowth.
 Wash, 160 lks. wide, course NW.
 Wash, 5 lks. wide, course NW. Along cleared road.
 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for the $\frac{1}{4}$ sec. cor. of secs. 26 & 35,
 with brass cap mkd.

$\frac{1}{4}$ S 26
S 35

3.60
13.85
40.02

1931 from which,
 a paloverde, 6 ins. in diam., brs. N.38°W., 74 lks.
 dist., mkd. $\frac{1}{4}$ S 26 BT
 a paloverde, 4 ins. in diam., brs. S.34°W., 95 lks.
 dist., mkd. $\frac{1}{4}$ S 35 BT
 House, brs. S.9°W.,

80.04

The cor. of secs. 26, 27, 34 & 35.
 Land, rolling desert.
 Soil, sandy loam, 2nd. rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and cacti.

9.70
26.60
32.50
40.00

N.0°01'W., on true line, bet. secs. 26 & 27.
 Over rolling desert land, thru scattering timber &
 undergrowth.
 Wash, 10 lks. wide, course NW.
 Wash, 5 lks. wide, course NW.
 Wash, 5 lks. wide, course NW.
 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for the $\frac{1}{4}$ sec. cor. of secs. 26 & 27,
 with brass cap mkd.


$\frac{1}{4}$
S27 S26

1931 from which,
 a paloverde, 10 ins. in diam., brs. N.64°W., 102
 lks. dist., mkd. $\frac{1}{4}$ S27 BT
 a paloverde, 12 ins. in diam., brs. S.73 $\frac{1}{2}$ °E., 432
 lks. dist., mkd. $\frac{1}{4}$ S26 BT

Survey of the Subdivision Lines of T. 2 S., R. 4 W.


Chains

40.25 Wash, 10 lks. wide, course NW.
 55.60 Wash, 20 lks. wide, course W.
 68.50 Wash, 20 lks. wide, course SW.
 77.50 Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in the ground for the witness corner of secs. 22, 23, 26 and 27, with brass cap mkd.



1931 from which,
 a paloverde, 12 ins. in diam., brs. S.29°E., 54 lks. distant, mkd. WC T2S R4W S26 BT
 a paloverde, 14 ins. in diam., brs. S.75½°W., 17 lks. distant, mkd. WC T2S R4W S27 BT
 No other bearing trees available; raise a mound of stone 2 ft. base, 1½ ft. high W. of cor. 3 ft. distant.
 78.00 Enter wash, course SW.
 80.00 True point for cor. falls in wash, where it is impracticable to monument the cor., establish witness cor. as hereinbefore described.
 Land, rolling desert.
 Soil, sandy loam, 2nd. rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and cacti.

40.00 From true point for cor. of secs. 22, 23, 26, and 27, S.89°46'E., on random line, bet. secs. 23 & 26.
 80.06 Set temp. ¼ sec. cor.
 Intersect the cor. of secs. 23, 24, 25 & 26.
 Thence,
 N.89°46'W., on true line, bet. secs. 23 & 26.
 40.03 Over rolling land, thru scattering timber & undergrowth. Set an iron post 3 ft. long; 1 in. in diam., 26 ins. in the ground for the ¼ sec. cor. of secs. 23 & 26, with brass cap mkd.



1931 from which,
 a paloverde 12 ins. in diam., brs. N.79°W., 318 lks. dist., mkd. ¼ S23 BT
 a paloverde, 5 ins. in diam., brs. S.42¼°E., 78 lks. dist., mkd. ¼ S26 BT

52.25 Wash, 20 lks. wide, course SW.
 80.06 True point for cor. of secs. 22, 23, 26 and 27 falls on E. edge of wash, course SW.
 Land, rolling.
 Soil, sandy loam 2nd. rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and cacti.

From true point for cor. of secs. 22, 23, 26, and 27, N.0°01'W., on true line, bet. secs. 22 & 23.
 Over rolling land, thru scattering timber & undergrowth. Line follows up sandy wash, course SW.
 5.70 Leave wash, course SW.
 9.00 Road, brs. NW-SE.
 19.80 Road, brs. NE-SW.
 33.70 Wash, 20 lks. wide, course SE.


Survey of the Subdivision Lines of T. 2 S., R. 4 W.

Chains	
40.00	<p>Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. of secs. 22 and 23, with brass cap mkd.</p> <p style="text-align: center;">$\frac{1}{4}$</p> <p style="text-align: center;">S22 S23</p> <p style="text-align: center;">1931 from which,</p> <p>an ironwood, 8 ins. in diam., brs. S.20°E., 435 lks. dist., mkd. $\frac{1}{4}$ S23 BT</p> <p>a paloverde, 10 ins. in diam., brs. S.58°W., 219 lks. dist., mkd. $\frac{1}{4}$ S22 BT</p>
55.90	Wash, 5 lks. wide, course SW.
62.40	Same wash, course S. Asc. up same.
64.40	Leave wash, from NW.
80.00	<p>Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in the ground for the cor. of secs. 14, 15, 22 and 23, with brass cap mkd.</p> <p style="text-align: center;">T2S R4W S15 S14 ----- S22 S23</p> <p style="text-align: center;">1931 from which,</p> <p>No bearing trees available; raise a mound of stone 4 ft. base, 2 ft. high W. of cor. 3 ft. distant.</p>
	<p>Land, rolling.</p> <p>Soil, sandy and stony 2nd. and 3rd. rate.</p> <p>Timber, paloverde and ironwood.</p> <p>Undergrowth, greasewood and cacti.</p>
40.00	<p>S.89°46'E. on a random line, bet. secs. 14 and 23.</p> <p>Set temp. $\frac{1}{4}$ sec. cor.</p>
79.96	<p>Intersect the cor. of secs. 13, 14, 23 & 24.</p> <p>Thence,</p> <p>N.89°46'W., on true line, bet. secs. 14 and 23.</p> <p>Over rolling land, thru scattering timber & undergrowth.</p> <p>Asc. 67 ft. over gradual SE slope.</p>
13.50	Spur, brs. SE. Desc. 57 ft. over SW slope.
27.50	Wash, 20 lks. wide, course SW.
33.10	Road, brs. NE-SW.
39.98	<p>Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. of secs. 14 and 23, with brass cap mkd.</p> <p style="text-align: center;">$\frac{1}{4}$</p> <p style="text-align: center;">S 14 ----- S 23</p> <p style="text-align: center;">1931 from which,</p> <p>an ironwood, 16 ins. in diam., brs. N.2°E., 90 lks. dist., mkd. $\frac{1}{4}$ S14 BT</p> <p>an ironwood, 14 ins. in diam., brs. S.17°30'E., 180 lks. dist., mkd. $\frac{1}{4}$ S23 BT</p>
40.30	Wash, 70 lks. wide, course SE.
66.40	Wash, 10 lks. wide, course S.
75.70	Wash, 5 lks. wide, course SW.
79.96	<p>The cor. of secs. 14, 15, 22 and 23.</p> <p>Land, rolling.</p> <p>Soil, sandy loam, 2nd. rate.</p> <p>Timber, paloverde and ironwood.</p> <p>Undergrowth, greasewood and cacti.</p>

Survey of the Subdivision Lines of T. 2 S., R. 4 W

Chains


N.0°01'W., on true line, bet. secs. 14 and 15.
 Over rolling land, thru scattering timber & undergrowth.
 17.60 Wash, 10 lks. wide, course SE.
 32.00 Wash, 20 lks. wide, course SE.
 36.10 Wash, 10 lks. wide, course SE.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in
 the ground to bedrock, deposit a rock mkd. with a cross
 (X) at base of post, raise a mound of stone about
 post, for the $\frac{1}{4}$ sec. cor. of secs. 14 & 15, with brass
 cap mkd.



1931

No bearing trees available.

47.90 Wash, 5 lks. wide, course SE.
 50.90 Road, brs. NW-SE.
 65.00 Leave rolling, enter mountainous land, brs. NE-SW.
 Asc. 130 ft. over S. slope.
 71.00 Wash, near head, course SE.
 78.00 Spur, brs. E. Thence along east slope to
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 16 ins. in
 the ground to bedrock, deposit a stone mkd. with a
 cross (X) at base of post, raise a mound of stone
 about post, for the cor. of secs. 10, 11, 14 & 15,
 with brass cap mkd.




1931

No bearing trees available.

Land, rolling. and mountainous.
 Soil, rocky 3rd. and 4th. rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and cacti.

40.00 S.89°46'E., on random line, bet. secs. 11 and 14.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.22 ~~Paloverde~~ ~~14~~ ~~lks~~ ~~SE~~ ~~of~~ ~~the~~ ~~cor.~~ of secs. 11, 12, 13 & 14.
 Thence,
 N.89°52'W., on true line, bet. secs. 11 and 14.
 Over rolling land, thru scattering timber & undergrowth.
 0.30 Road, brs. NE-SW.
 3.60 Wash, 10 lks. wide, course S.
 9.50 Wash, 10 lks. wide, course S.
 22.80 Wash, 10 lks. wide, course SE.
 31.00 Wash, 10 lks. wide, course SE.
 38.50 Wash, 5 lks. wide, course SE.
 40.11 Set an iron post 3 ft. long, 1 in. in diam., 14 ins. in
 the ground to bedrock, raise amount of stone about
 post, for the $\frac{1}{4}$ sec. cor. of secs. 11 and 14, with
 brass cap mkd.



Survey of the Subdivision Lines of T. 2 S., R. 4 W.

Chains


a paloverde, 6 ins. in diam., brs. N.8°E., 148 lks. dist., mkd. $\frac{1}{4}$ S11 BT
 a paloverde, 8 ins. in diam., brs. S.45°W., 135 lks. dist., mkd. $\frac{1}{4}$ S14 BT

45.00 Asc. 77 ft. over rocky east slope of spur.
 52.00 Rocky spur, brs. N. Desc. 40 ft. over W. slope.
 58.20 Wash, near head, course NE.
 63.20 Wash, 20 lks. wide, course NE.
 77.00 Wash, 10 lks. wide, course SE.
 80.22 The cor. of secs. 11, 12, 13 and 14.

Land, rolling.
 Soil, sandy and stony 3rd. rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and cacti.

N.0°01'W., on true line, bet. secs. 10 and 11.
 Over mountainous land, thru scattering timber & undergrowth.


6.80 Asc. 234 ft. over broken SE slope to spur.
 16.60 Wash, 10 lks. wide, course E.
 24.55 Rocky spur, brs. E. Desc. 190 ft. over N. slope.
 Wash, 10 lks. wide, course NE.
 27.00 Asc. slight SE slope.
 38.60 Spur, brs. E. Desc. 80 ft. over N. slope.
 Wash, 20 lks. wide, course NE.
 40.00 Leave mountainous across rolling land, brs. E-W.
 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. of secs. 10 & 11, with brass cap mkd.



1931

No bearing trees available.
 Raise a mound of stone 3 ft. base, 2 ft. high W. of cor. 3 ft. distant.

47.80 Wash, 10 lks. wide, course NE.
 53.90 Wash, 10 lks. wide, course E.
 64.30 Wash, 10 lks. wide, course NE.
 68.70 Wash, 50 lks. wide, course NE.
 72.40 Road, brs. SW and E.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the cor. of secs. 2, 3, 10 & 11, with brass cap mkd.



1931

from which,
 an ironwood, 16 ins. in diam., brs. S.60°E., 72 lks. dist., mkd. T2S R4W S11 BT
 A high peak, brs. S.26°W., plus 11° V.A.
 No other bearing tree available.

Land, rolling & mountainous.
 Soil, rocky 4th. rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and cacti.

Survey of the Subdivision Lines of T. 2 S., R. 4 W.

Chains

40.00 S. 89°52'E., on random line, bet. secs. 2 and 11.
Set temp. $\frac{1}{4}$ sec. cor.

80:10 Fall 10 lks. N. of the cor. of secs. 1, 2, 11 & 12.
Thence,
N. 89°48'W., on true line, bet. secs. 2 and 11.
Over rolling land, thru scattering timber & undergrowth.

5.80 Wash, 20 lks. wide, course N.

20.10 Wash, 20 lks. wide, course NE.

29.20 Wash, 5 lks. wide, course N.

34.80 Wash, 20 lks. wide, course N.

40.05 (True point for the $\frac{1}{4}$ sec. cor.) falls in center of wash
20 lks. wide, course N.

40.30 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in
the ground to bedrock, deposit a stone mkd. with a
cross (X) at base of post, raise a mound of stone
about post, for witness cor. to the $\frac{1}{4}$ sec. cor. of
secs. 2 and 11, with brass cap mkd.

$\frac{1}{4}$ $\frac{S\ 2}{S\ 11}$ WC

1931

No bearing trees available.

41.10 Wash, 5 lks. wide, course NE.

53.60 Wash, 5 lks. wide, course NE.

60.20 Road, brs. NE-SW.

64.30 Wash, 10 lks. wide, course NW.

66.10 Wash, 20 lks. wide, course NE.

80.10 Along S. side of wash.
The cor. of secs. 2, 3, 10 and 11.

Band, rolling.
Soil, rocky 4th. rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and cacti.

N. 0°01'W., on true line, bet. secs. 2 and 3.
Over mountainous land, thru scattering timber & undergrowth.
Asc. 45 ft. over S. slope.

15.00 Spur, brs. SE. Desc. 15 ft. over NE slope.

17.00 Wash, near head, course SE. Asc. 102 ft. over SE slope.

26:00 Spur, brs. SW. Desc. 80 ft. over NW slope.

37.20 Spur, brs. NW. Desc. 35 ft. over NE slope.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
the ground for the $\frac{1}{4}$ sec. cor. of secs. 2 & 3, with
brass cap mkd.

$\frac{1}{2}$
S3 | S2

1931

No bearing trees available.
Raise a mound of stone 2 $\frac{1}{2}$ ft. base, 2 ft. high W. of
cor. 3 ft. distant.

Desc. 85 ft. over NE slope.

49.70 Wash, 10 lks. wide, course NE.

55.00 Road, brs. NE-SW.

61.60 Wash, 10 lks. wide, course N.

65.00 Leave wash, course NE.

66.00 Road, brs. NE-SW.


81.30 Same wash, course NW.

82.25 Intersect the S. bdy. of sec. 34, T. 1 S., R. 4 W., at

Survey of the Subdivision Lines of T. 2 S., R. 4 W.

Chains

4.92 chs. S. 89°49'E., of the 1/4 sec. cor. of said sec. cor. sec., hereinafter described, ...
At point of intersection set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in the ground for the closing cor. of secs. 2 & 3, with brass cap mkd.




T2S R4W from which, an ironwood, 12 ins. in diam., brs. S. 30°E., 286 lks. dist., mkd. T2S R4W S2.CC BT
No other tree available; raise a mound of stone 4 ft. base, 2 ff. high S. of cor. 3 ft. distant.

Land, rolling and mountainous.
Soil, rocky 4th. rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and cacti.

From the reestablished cor. of secs. 3, 4, 33 & 34, on S. bdy. of Tp., described in book "D" of this Gp., N. 0°02'W., on true line, bet. secs. 33 & 34. Over rolling desert land, thru scattering timber & undergrowth.

15.70
24.60
36.30
40.00

Wash, 5 lks. wide, course W.
Wash, 5 lks. wide, course W.
Wash, 5 lks. wide, course W.
Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the 1/4 sec. cor. of secs. 33 & 34, with brass cap mkd.



1931 from which, a paloverde, 5 ins. in diam., brs. N. 7 1/4°E., 161 lks. dist., mkd. 1/4 S34 BT
a paloverde, 8 ins. in diam., brs. S. 18 1/4°W., 404 lks. dist., mkd. 1/4 S33 BT
House, brs. N. 79 1/4°W., about 60 chs. dist.
House, brs. N. 49°W., about 50 chs. "
House, brs. N. 42 1/2°W., " 40 chs. "


56.30
61.40
73.00
75.30
80.00

Wash, 20 lks. wide, course NW.
Wash, 10 lks. wide, course W.
Enter wash, course SW.
Leave wash.
True point for the cor. of secs. 27, 28, 33 & 34 falls in center of road, which brs. NE-SW., where it is impracticable to monument the cor., establish witness cor. as hereinafter described.

Land, rolling.
Soil, sandy loam, 2nd. rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and cacti.

Survey of the Subdivision Lines of T. 2 S., R. 4 W.

Chains From true point for cor. of secs. 27, 28, 33 and 34
 S. 89°44'E., on random line, bet. secs. 27 & 34.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.92 Fall 4 lks. S. of the cor. of secs. 26, 27, 34 & 35.
 Thence,
 N. 89°46'W., on true line, bet. secs. 27 & 34.
 Over rolling desert land, thru scattering timber & under-
 growth.
 17.20 Wash, 5 lks. wide, course NW.
 29.60 Wash, 10 lks. wide, course NW.
 39.96 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for the $\frac{1}{4}$ sec. cor. of secs. 27 & 34, with
 brass cap mkd.




1931 from which,
 a paloverde, 6 ins. in diam., brs. N. 5 $\frac{1}{2}$ °W., 178 lks.
 dist., mkd. $\frac{1}{4}$ S27 BT
 a paloverde, 4 ins. in diam., brs. S. 49 $\frac{1}{2}$ °W., 384 lks
 dist., mkd. $\frac{1}{4}$ S34 BT

68.30 Enter big wash, from NE; course West.
 72.50 Lv. wash, course SW.
 79.92 The true point for cor. of secs. 27, 28, 33 & 34.


Land, rolling.
 Soil, sandy loam, 2nd. rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and acati.

 From true point for cor. of secs. 27, 28, 33 and 34.
 N. 0°02'W., on true line, bet. secs. 27 and 28.
 Over rolling land, thru scattering timber & undergrowth.
 0.20 Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in
 the ground for the witness cor. of secs. 27, 28, 33
 and 34, with brass cap mkd.



1931
 WC from which,
 an ironwood, 5 ins. in diam., brs. N. 76°W., 250 lks.
 dist., mkd. T2S R4W S28 BT WC
 a paloverde, 8 ins. in diam., brs. N. 35°E., 689 lks.
 dist., mkd. T2S R4W S27 BT WC
 a paloverde, 6 ins. in diam., brs. S. 48 $\frac{1}{4}$ °E., 329 lks.
 dist., mkd. T2S R4W S34 BT WC
 a paloverde, 8 ins. in diam., brs. S. 10 $\frac{1}{2}$ °W., 506 lks.
 dist., mkd. T2S R4W S33 BT WC

Thence, across cleared land, brs. E-W.
 4.30 Leave cleared land, brs. E-W.
 5.30 Wash, 5 lks. wide, course SW.
 28.00 Wash, 10 lks. wide, course SE.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for the $\frac{1}{4}$ sec. cor. of secs. 27 & 28, with
 brass cap marked



1931 from which,

Survey of the Subdivision Lines of T. 2 S., R. 4 W.

Chains

an ironwood, 18 ins. in diam., brs. N.35°W., 593 lks. dist., mkd. 1/4 S28 BT.
a paloverde, 8 ins. in diam., brs. S.63 3/4°E., 241 lks. dist., mkd. 1/4 S27 BT

45.00
61.80
71.00
80.00

Road, brs. NW-SE.
Same road, brs. NE-SW.
Wash, 20 lks. wide, course SW.
Set an iron post 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the cor. of secs. 21, 22, 27 & 28, with brass cap mkd.

T2S	R4W
S21	S22
S28	S27

1931 from which,
an ironwood, 20 ins. in diam., brs. N.80°E., 163 lks. dist., mkd. T2S R4W S22 BT
a paloverde, 8 ins. in diam., brs. S.42°E., 305 lks. dist., mkd. T2S R4W S27 BT
No other bearing trees available.

Land, rolling.
Soil, sandy loam, 2nd. rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and cacti.

40.00
79.90

5.00
11.60
34.90
39.95

S.89°46'E., on random line, bet. secs. 22 & 27.
Set temp. 1/4 sec. cor.
Fall 2 lks. S. of the true point for 22 cor. of secs. 22, 23, 26 and 27. Thence,
N.89°47'W., on true line, bet. secs. 22 & 27.
Over rolling land, thru scattering timber & undergrowth.
Across wash, course SW.
Lv. wash, course SW.
Road, brs. NE-SW.
Wash, 20 lks. wide, course S.
Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the 1/4 sec. cor. of secs. 22 & 27, with brass cap mkd.

1/4	S 22
	S 27

1931 from which,
a paloverde, 18 ins. in diam., brs. N.67°E., 695 lks. dist., mkd. 1/4 S 22 BT
an ironwood, 16 ins. in diam., brs. S.83°E., 326 lks. dist., mkd. 1/4 S27 BT

44.90
61.00
76.60
77.10
79.90


Wash, 50 lks. wide, course SE.
Wash, 10 lks. wide, course SE.
Road, brs. N-S.
Wash, 20 lks. wide, course S.
The cor. of secs. 21, 22, 27 & 28.

Land, rolling.
Soil, sandy 2nd. rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and cacti.

Survey of the Subdivision Lines of T. 2 S., R. 4 W.


Chains

N.0°02'W., on true line, bet. secs. 21 and 22.
 Over rolling land, thru scattering timber & undergrowth.
 Wash, 10 lks. wide, course SE.
 11.00
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for the $\frac{1}{4}$ sec. cor. of secs. 21 & 22, with
 brass cap mkd.



1931 from which,
 a paloverde, 6 ins. in diam., brs. N.50°E., 335 lks.
 dist., mkd. $\frac{1}{4}$ S22 BT
 a paloverde, 10 ins. in diam., brs. N.8 $\frac{1}{2}$ °W., 110 lks.
 dist., mkd. $\frac{1}{4}$ S21 BT


46.00 Wash, 5 lks. wide, course SE.
 58.90 Wash, 30 lks. wide, course SE.
 77.10 Wash, 20 lks. wide, course SE.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in
 the ground for the cor. of secs. 15, 16, 21 & 22,
 with brass cap mkd.



1931
 No bearing trees available; raise a mound of stone
 3 ft. base, 1 $\frac{1}{2}$ ft. high W. of cor. 3 ft. distant.

Land, rolling.
 Soil, sandy loam, 2nd. rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and cacti.

S.89°47'E., on random line, bet. secs. 15 and 22.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.98 The cor. of secs. 14, 15, 22 and 23.
 Thence,
 N.89°47'W., on true line, bet. secs. 15 & 22.
 Over rolling land, thru scattering timber & undergrowth.
 4.60 Wash, 10 lks. wide, course S.
 17.70 Wash, 20 lks. wide, course SE.
 35.20 Wash, 30 lks. wide, course SE.
 39.99 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for the $\frac{1}{4}$ sec. cor. of secs. 15 & 22, with
 brass cap mkd.



1931 from which,
 a paloverde, 14 ins. in diam., brs. N.4 $\frac{1}{2}$ °W., 245 lks.
 dist., mkd. $\frac{1}{4}$ S15 BT
 a paloverde, 8 ins. in diam., brs. S.53 $\frac{1}{2}$ °E., 147 lks.
 dist., mkd. $\frac{1}{4}$ S22 BT

40.50 Wash, 20 lks. wide, course SE.
 49.40 Wash, 20 lks. wide, course SE.
 51.60 Spur, brs. SE.
 64.40 Wash, 10 lks. wide, course S.
 75.50 Enter wash, course S.
 77.10 Leave wash, course S.

Survey of the Subdivision Lines of T. 2 S., R. 4 W.

Chains

79.98

The cor. of secs. 15, 16, 21 and 22.
Land, rolling.
Soil, sandy loam, 2nd. rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and cacti.

14.00

N.0°02'W., on true line, bet. secs. 15 & 16.
Over rolling land, thru scattering timber & undergrowth.
Center of wash, 50 lks. wide, course SE.

24.30

Head of wash, course SE.

40.00

Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the $\frac{1}{4}$ sec. cor. of secs. 15 & 16, with brass cap mkd.

S16 | S15

1931

No bearing trees available.

42.80

Wash, 10 lks. wide, course SE.

72.80

Head of wash, 10 lks. wide, course SE.

77.50

Center of wash, 50 lks. wide, course SW.

80.00

Set an iron post 3 ft. long, 2 ins. in diam., on bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the cor. of secs. 9, 10, 15 and 16, with brass cap mkd.

T2S R4W
S9 | S10
S16 | S15

1931

No bearing trees available.

Land, rolling.
Soil, rocky 3rd. rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and cacti.

40.00

S.89°47'E., on random line, bet. secs. 10 & 15.

80.00

Set temp. $\frac{1}{4}$ sec. cor.

Wall 2 lks. N. of the cor. of secs. 10, 11, 14 & 15.

Thence,

N.89°46'W., on true line, bet. secs. 10 & 15.

Over mountainous land, thru scattering timber & undergrowth.

Asc. 216 ft. over NE slope.

5.25

Rocky spur, brs. SE. Desc. 103 ft. over SW slope.

9.00

Thence along S. slope.

19.75

Wash, near head, course SE. Asc. 226 ft. over NE slope.

25.70

Rocky spur, brs. SE. Desc. 93 ft. over W. slope.

31.40

Wash, 20 lks. wide, course S.


Asc. 308 ft. over NE slope.

40.00

Set an iron post 3 ft. long, 1 in. in diam., on cross (X) cut on bedrock, raise a mound of stone about post, for the $\frac{1}{4}$ sec. cor. of secs. 10 & 15, with brass cap mkd.

Survey of the Subdivision Lines of T. 2 S., R. 4 W.


Chains



1931
 No bearing trees available.
 Asc. 181 ft. over broken NE slope.
 47.70 Top of rocky ridge, brs. NE-SW.
 Desc. 572 ft. over broken W. slope.
 76.60 Wash, 50 lks. wide, course SW. Asc. 29 ft. over E. slope.
 80.00 The cor. of secs. 9, 10, 15 & 16.


Land, mountainous.
 Soil, rocky 4th. rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and cacti.

N.0°02'W., on true line, bet. secs. 9 and 10.
 Over mountainous land, thru scattering timber & undergrowth.
 Asc. 404 ft. over broken S. slope.
 12.60 Rocky ridge, brs. E-W. Desc. 402 ft. over rocky N. slope.
 27.00 Wash, near head, course NW.
 Lv. mountainous enter rolling land, brs. E-W.
 36.00 Spur, brs. NW.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., on bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the $\frac{1}{4}$ sec. cor. of secs. 9 and 10, with brass cap mkd.



1931
 No bearing trees available.

45.40 Wash, 10 lks. wide, course NW.
 50.00 Wash, 10 lks. wide, course NW.
 55.50 Wash, 20 lks. wide, course NW.
 58.30 Same wash, course NE. Along edge of same.
 76.80 Wash, turns to NE.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for the cor. of secs. 3, 4, 9 and 10, with brass cap mkd.



1931 from which,
 a paloverde, 6 ins. in diam., brs. N.84°E., 64 lks. dist., mkd. T2S R4W S3 BT
 High peak, brs. S.37°E., plus 9 $\frac{1}{2}$ ° V.A. about 60 chs. distant.
 No other trees available; raise a mound of stone 3 ft. base, 2 ft. high W. of cor. 3 ft. distant.

Land, mountainous and rolling.
 Soil, rocky 4th. rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and cacti.

Survey of the Subdivision Lines of T. 2 S., R. 4 W.


Chains	S. 89°46'E., on random line, bet. secs. 3 & 10.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.90	Fall 7 lks. S. of the cor. of secs. 2, 3, 10 & 11.
	Thence,
	N. 89°49'W., on true line, bet. secs. 3 & 10.
	Over rolling land, thru scattering timber & undergrowth.
	Along S. edge of wash.
3.00	Lv. wash, from NW.
8.50	Same wash, from West.
10.00	Lv. wash, from SW.
17.00	Low ridge, brs. N-S.
21.20	Wash, 20 lks. wide, course NW.
26.30	Wash, 5 lks. wide, course NW.
33.80	Road, brs. NW-SE.
34.70	Wash, 10 lks. wide; course NW.
39.95	Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the $\frac{1}{4}$ sec. cor. of secs. 3 & 10, with brass cap mkd.
	$\frac{1}{2}$ $\frac{S \ 3}{S \ 10}$
	1931
	No trees available.
43.70	Wash, 10 lks. wide, course NW.
46.60	Wash, 30 lks. wide, course N.
56.30	Wash, 10 lks. wide, course NW.
62.00	Wash, 50 lks. wide, course NW.
74.70	Wash, 10 lks. wide, course NW.
78.90	Wash, 50 lks. wide, course NW.
79.90	The cor. of secs. 3, 4, 9 and 10.
	Land, rolling.
	Soil, rocky 4th. rate.
	Timber, paloverde and ironwood.
	Undergrowth, greasewood and cacti.

	N. 0°02'W., on true line, bet. secs. 3 & 4.
	Over rolling land, thru scattering timber & undergrowth.
2.40	Wash, 50 lks. wide, course NW.
14.80	Wash, 20 lks. wide, course NW.
22.60	Wash, at bend from SE to N.
35.00	Center of wash, 100 lks. wide, course NW, road in same.
40.00	Set an iron post 3 ft. long, 1 in. in diam., 22 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the $\frac{1}{4}$ sec. cor. of secs. 3 & 4, with brass cap mkd.
	$\frac{1}{2}$
	S4 S3
	1931
	No bearing trees available.
44.35	Wash, 5 lks. wide, course SW.
54.60	Wash, 5 lks. wide, course W.
59.00	Wash, 5 lks. wide, course W. Asc. slight S. slope.
67.40	Ridge, brs. E-W. Desc. slight N. slope.
70.80	Head of wash, course NW.
82.23	Intersect the S. bdy. of sec. 33, T. 1 S., R. 4 W., at 4.80 chs. S. 89°45'E., of the $\frac{1}{4}$ sec. cor. of said sec., hereinbefore described, hereinbefore described.

Survey of the Subdivision Lines of T. 2 S., R. 4 W.

Chains

At point of intersection set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for the closing cor. of secs. 3 and 4, with brass cap mkd.




No bearing trees available; raise a mound of stone 4 ft. base, 2 ft. high S. of cor. 3 ft. distant.

Land, rolling.
Soil, rocky 3rd. rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and cacti.


14.40
40.00

From the reestablished cor. of secs. 4, 5, 32 & 33, on S. bdy. of Tp., described in book "D" of this group. N.0°02'W., on true line, bet. secs. 32 & 33. Over rolling land, thru scattering timber & undergrowth. Center of wash, 80 lks. wide, course SW. Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the 1/4 sec. cor. of secs. 32 & 33, with brass cap mkd.



49.40
59.50
80.00

1931 from which,
a paloverde, 10 ins. in diam., brs. S.43°E., 318 lks. dist., mkd. 1/4 S33 BT
a mesquite, 12 ins. in diam., brs. S.66°W., 519 lks. dist., mkd. 1/4 S32 BT A house brs. N.20 1/2°E.
Road, brs. NW-SE.
Road, brs. NE-SW.
Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in the ground for the cor. of secs. 28, 29, 32 & 33, with brass cap mkd.



1931
A house, brs. N.58°E.
No bearing trees available; dig pits 18 x 18 x 12 ins. NW, NE, SE and SW of cor. 3 ft. distant.
Land, rolling.
Soil, sandy loam, 2nd. rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and cacti.


40.00
79.92
7.20

S.89°44'E., on random line, bet. secs. 28 & 33. Set temp. 1/4 sec. cor. Fall 4 lks. S. of true point for cor. of secs. 27, 28, 33 & 34. Thence, N.89°46'W., on true line, bet. secs. 28 & 33. Over rolling land, thru scattering timber & undergrowth. Wash, 10 lks. wide, course SW.

Survey of the Subdivision Lines of T. 2 S., R. 4 W.

Chains

14.00 Over cleared land, brs. N-S.
 24.00 Wash, 5 lks. wide, course SW.
 28.00 Wash, 5 lks. wide, course S.
 34.90 Ev. cleared land, brs. N-S.
 39.96 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. of secs. 28 & 33, with brass cap mkd.



1931

No bearing trees available; dig pits 18 x 18 x 12 ins. E. and W. of cor. 3 ft. distant.


House, brs. S. $61\frac{1}{2}^{\circ}$ W.
 " " N. 60° W.
 " " N. 30° W.

45.20 Wash, 5 lks. wide, course SW.
 54.20 Road, brs. NE-SW.
 58.60 Road, brs. N-S.
 60.80 Wash, 10 lks. wide, course S.
 67.40 Road, brs. NE-SW.
 71.50 Wash, 5 lks. wide, course S.
 79.92 The cor. of secs. 28, 29, 32 & 33:

Land, rolling desert.
 Soil, sandy loam, 2nd. rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and cacti.

N. $0^{\circ}02'$ W., on true line, bet. secs. 28 & 29.
 Over rolling desert land, thru scattering timber & undergrowth.


0.10 Wash, 5 lks. wide, course SW.
 11.40 Wash, 5 lks. wide, course SW.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. of secs. 28 & 29, with brass cap mkd.



1931

from which,
 an ironwood, 12 ins. in diam., brs. N. $72\frac{1}{2}^{\circ}$ W., 116 lks. dist., mkd. $\frac{1}{4}$ S29 BT
No other bearing tree available.
 Dig pits 18x18x12 ins. N. and S. of cor. 3 ft. dist.

65.90 Wash, 20 lks. wide, course SE.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the cor. of secs. 20, 21, 28 & 29, with brass cap mkd.



1931

from which,
 a paloverde, 10 ins. in diam., brs. N. $85\frac{1}{2}^{\circ}$ W., 58 lks. dist., mkd. T2S R4W S20 BT
 a paloverde, 16 ins. in diam., brs. S. 86° W., 67 lks. dist., mkd. T2S R4W S29 BT

Survey of the Subdivision Lines of T. 2 S., R. 4 W.

Chains

No other bearing trees available.
Land, rolling.
Soil, sandy 2nd. rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and cacti.

40.00 S.89°46'E., on random line, bet. secs. 21 & 28.
79.92 Set temp. 1/4 sec. cor.
Intersect the cor. of secs. 21, 22, 27 & 28.
Thence,
N.89°46'W., on true line, bet. secs. 21 & 28.
Over rolling desert land, thru scattering timber & under-
growth.
5.40 Wash, 10 lks. wide, course S.
12.70 Wash, 20 lks. wide, course S.
27.50 Wash, 20 lks. wide, course S.
39.96 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the
ground for the 1/4 sec. cor. of secs. 21 & 28, with
brass cap mkd.

S 21

1/4

S 28

1931

No bearing trees available; raise a mound of stone
4 ft. base, 2 ft. high N. of cor. 3 ft. distant.

46.40 Wash, 50 lks. wide, course S.
48.60 Wash, 10 lks. wide, course SE.
58.30 Wash, 10 lks. wide, course SE.
64.00 Wash, 20 lks. wide, course SE.
68.80 Wash, 10 lks. wide, course SE.
76.20 Wash, 20 lks. wide, course SE.
79.92 The cor. of secs. 20, 21, 28 & 29.

Land, rolling desert.
Soil, sandy loam, 2nd. rate and rocky 3rd. rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and cacti.

13.00 N.0°02'W., on true line, bet. secs. 20 & 21.
29.90 Over rolling desert land, thru scattering timber & under-
40.00 growth.
Wash, 50 lks. wide, course SW.
Wash, 20 lks. wide, course SW.
Set an iron post 3 ft. long, 1 in. in diam., 14 ins. in
the ground to bedrock, deposit a stone mkd. with a
cross (X) at base of post, raise a mound of stone
about post, for the 1/4 sec. cor. of secs. 20 & 21, with
brass cap mkd.

1/4

S20

S21

1931

No bearing trees available.
63.70 Wash, 10 lks. wide, course SW. Continue up same.
66.30 Leave wash, turns from NW.

Survey of the Subdivision Lines of T. 2 S., R.4 W.

Chains

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the cor. of secs. 16, 17, 20 and 21, with brass cap mkd.

T2S	R4W
S17	S16
S20	S21

1931

No bearing trees available.

Land, rolling.
Soil, sandy loam, 2nd. rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and cacti.

40.00 S. 89°46'E., on random line, bet. secs. 16 and 21.
Set temp. $\frac{1}{4}$ sec. cor.
79.92 Fall 9 lks. S. of the cor. of secs. 15, 16, 21 & 22.
Thence,
N. 89°50'W., on true line, bet. secs. 16 and 21.
Over rolling land, thru scattering timber & undergrowth.
7.10 Wash, 10 lks. wide, course SE.
16.00 Wash, 10 lks. wide, course S.
26.50 Wash, 10 lks. wide, course S.
31.40 Wash, 10 lks. wide, course SE.
37.20 Wash, 20 lks. wide, course S.
39.96 Set an iron post 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the $\frac{1}{4}$ sec. cor. of secs. 16 & 21, with brass cap mkd.

$\frac{1}{4}$	S 16
	S 21

1931

No bearing trees available.

55.70 Wash, 50 lks. wide, course S.
62.20 Wash, 20 lks. wide, course S.
66.40 Wash, 50 lks. wide, course SE.
79.92 The cor. of secs. 16, 17, 20 and 21.


Land, rolling.
Soil, sandy loam, 2nd. rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and cacti.

9.00 N. 0°02'W., on true line, bet. secs. 16 & 17.
Over rolling land, thru scattering timber & undergrowth.
18.70 Wash, 50 lks. wide, course SE.
30.00 Wash, near head, course SE. Enter mtns. land, brs. E-W.
35.60 Rocky spur, brs. SE. 186 ft. above wash.
35.60 Desc. 104 ft. over NE slope.
35.60 Wash, near head, course SE. Asc. 102 ft. over SW slope.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, for the $\frac{1}{4}$ sec. cor. of

Survey of the Subdivision Lines of T. 2 S., R. 4 W.

Chains

secs. 16 and 17, with brass cap mkd.




1931

No bearing trees available.

Asc. 92 ft. over SW slope.

- 42.40 Rocky spur, brs. SE. Desc. 175 ft. over NE slope.
- 48.40 Wash, 20 lks. wide, course E. Asc. 350 ft. over S. slope.
- 65.00 Rocky spur, brs. E. Desc. 203 ft. over rolling N. slope.
- 75.90 Wash, 20 lks. wide, course NE.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the cor. of secs. 8, 9, 16 & 17, with brass cap mkd.




1931

No bearing trees available.

Land, rolling & mountainous.
Soil, sandy and stony 3rd. and 4th. rate.
Timber; paloverde and ironwood.
Undergrowth, greasewood and cacti.

- 40.00 S. 89°50'E., on random line, bet. secs. 9 and 16.
- 79.98 Set temp. $\frac{1}{4}$ sec. cor.
Fall 7 lks. N. of the cor. of secs. 9, 10, 15 & 16.
Thence,
N. 89°47'W., on true line, bet. secs. 9 and 16.
Over mountainous land, thru scattering timber & undergrowth.
Asc. 93 ft. over broken E. slope.
- 9.50 Rocky spur, brs. S. Desc. 246 ft. over W. slope.
- 16.00 Wash, near head, course S. Asc. 162 ft. over E. slope.
- 25.20 Spur, brs. S. Desc. 176 ft. over W. slope.
- 39.99 Set an iron post 3 ft. long, 1 in. in diam., 15 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the $\frac{1}{4}$ sec. cor. of secs. 9 & 16, with brass cap mkd.



1931

No bearing trees available.


- 41.20 Wash, 10 lks. wide, course S.
- 46.90 Wash, 20 lks. wide, at bend from NE to SE. Asc. 57 ft. over E. slope.
- 54.00 Round butte, on line, desc. 41 ft. over W. slope.
- 58.90 Wash, 50 lks. wide, 15 ft. deep, course SE.
- 65.90 Wash, 20 lks. wide, course SE.
Asc. 133 ft. over E. slope.
- 79.98 The cor. of secs. 8, 9, 16 and 17.
Land, mountainous. Soil, rocky 4th. rate. Timber, paloverde and ironwood. Undergrowth, greasewood and cacti.

Survey of the Subdivision Lines of T. 2 S., R. 4 W.

Chains

N.0°02'W.; on true line, bet. secs. 8 and 9.
Over mountainous land, thru scattering timber & undergrowth.


- 9.40 Desc. 96 ft. over NE slope.
- Wash, 20 lks. wide, course SE.
- Enter rolling land, brs. E-W.
- 26.00 Wash, 50 lks. wide, course SE.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the $\frac{1}{4}$ sec. cor. of secs. 8 & 9, with brass cap mkd.



1931

No bearing trees available.

- 51.75 Wash, 20 lks. wide, course SE.
- 53.30 Low ridge, brs. E-W. Desc. 52 ft. over N. slope.
- 54.85 Wash, near head, course NE. Asc. 47 ft. over S. slope.
- 57.00 Spur, brs. E. Desc. 62 ft. over N. slope.
- 59.70 Wash, 10 lks. wide, course NE.
- 65.00 Wash, 20 lks. wide, course NE.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the cor. of secs. 4, 5, 8 and 9, with brass cap mkd.




1931

No bearing trees available.

Land, mountainous and rolling.
Soil, rocky 4th. rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and cacti.

- 40.00 S.89°47'E., on random line, bet. secs. 4 & 9.
- Set temp. $\frac{1}{4}$ sec. cor.
- 79.90 Fall 7 lks. N. of the cor. of secs. 3, 4, 9 and 10.
- Thence,
- N.89°44'W., on true line, bet. secs. 4 and 9.
- Over rolling land, thru scattering timber & undergrowth.
- 14.40 Road, brs. N-S.
- 17.00 Wash, 20 lks. wide, course N.
- 19.00 Wash, 20 lks. wide, course N.
- 26.50 Wash, 10 lks. wide, course NE.
- 39.00 Wash, 20 lks. wide, course NE.
- 39.95 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, for the $\frac{1}{4}$ sec. cor. of secs. 4 and 9, with brass cap mkd.



1931

No bearing trees available.

- 52.30 Wash, 10 lks. wide, course NE.
- 62.70 Wash, 10 lks. wide, course NE.
- 79.90 The cor. of secs. 4, 5, 8 and 9.

Survey of the Subdivision Lines of T. 2 S., R. 4 W.


Chains

Land, rolling.
Soil, rocky 4th. rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and cacti.

N.0°02'W., on true line, bet. secs. 4 & 5.
Over rolling land, thru scattering timber & undergrowth.
Asc. gradual S. slope.

3.00
20.70
26.20
39.00
40.00


Low spur, brs. SW. Desc. gradual N. slope.
Enter wash, from S.5°E., down same.
Leave wash, course N.5°W.
Same wash, course NE.
Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in
the ground to bedrock, raise a mound of stone about
post, for the 1/4 sec. cor. of secs. 4 & 5, with brass
cap mkd.



1931 from which,
a paloverde, 8 ins. in diam., brs. S.51°E., 66 lks.
dist., mkd. 1/4 S4 BT
an ironwood, 6 ins. in diam., brs. S.28°W., 66 lks.
dist., mkd. 1/4 S5 BT

69.30
71.40
81.95
82.22

Asc. 17 ft. over SE slope.
Enter wash, at bend from SW to N. Down same.
Leave wash, course NE.
Wash, 30 lks. wide, course NE.
Lv. wash; across level bottom.
Intersect the S. bdy. of T. 1 S., R. 4 W., at 4.77 chs.
S.89°44'E., of the 1/4 sec. cor. of said sec. hereinbefore
described.
At point of intersection set an iron post 3 ft. long,
1 in. in diam., 18 ins. in the ground to bedrock,
raise a large mound of stone about post, for the
closing cor. of secs. 4 and 5, with brass cap mkd.



T2S R4W
1931 from which,
a paloverde, 5 ins. in diam., brs. S.23°E., 96 lks.
dist., mkd. T2S R4W S4 CCBT
an ironwood, 14 ins. in diam., brs. S.58°W., 180 lks.
dist., mkd. T2S R4W S5 CCBT

Land, rolling.
Soil, rocky 4th. rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and cacti.

From the cor. of secs. 5, 6, 31, and 32,
on the S. bdy. of Tp., described in book "D" of this
group.
N.0°03'W., on true line, bet. secs. 31 & 32.

Survey of the Subdivision Lines of T. 2 S., R. 4 W.

Chains

Over rolling desert land, thru scattering timber & undergrowth.

7.50


House, brs. W. 20 lks. distant.

9.60

Wash, 10 lks. wide, course SW.

40.00

Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the 1/4 sec. cor. of secs. 31 & 32, with brass cap mkd.



1931 from which, an ironwood, 14 ins. in diam., brs. N.58°W., 580 lks. dist., mkd. 1/4 S31 BT
an ironwood, 10 ins. in diam., brs. S.75°E., 892 lks. dist., mkd. 1/4 S32 BT

45.00

Wash, 5 lks. wide, course SW.

50.90


Wash, 10 lks. wide, course SW.

62.00

Wash, 10 lks. wide, course SW.

80.00

Set an iron post 3 ft. long, 2 ins. in diam., 16 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the cor. of secs. 29, 30, 31 & 32, with brass cap mkd.



1931 from which, a paloverde, 10 ins. in diam., brs. N.11°W., 773 lks. dist., mkd. T2S R4W S30 BT
No other bearing trees available.

Land, rolling desert.
Soil, sandy loam, 2nd. rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and cacti.

40.00

S.89°44'E., on random line, bet. secs. 29 and 32.

79.94

Set temp. 1/4 sec. cor.
Fall 2 lks. S. of the cor. of secs. 28, 29, 32 & 33.

Thence, N.89°45'W., on true line, bet. secs. 29 & 32.

Over rolling desert land, thru scattering timber & undergrowth.

25.00


Small wash, course S.

39.70

Enter cleared land, brs. N.-S.

39.97

Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the 1/4 sec. cor. of secs. 29 & 32, with brass cap mkd.



1931 from which, an ironwood, 14 ins. in diam., brs. N.65°W., 229 lks. dist., mkd. 1/4 S29 BT
No other bearing trees available.
Dig pits 18 x 18 x 12 ins. E. and W. of cor: 3 ft. dist.


Survey of the Subdivision Lines of T. 2 S., R. 4 W.

Chains

45.00 Leave cleared land, brs. N-S.
 46.80 Road, brs. NE-SW.
 50.10 Road, brs. NW-SE.
 56.80 Wash, 10 lks. wide, course SW.
 69.00 Low spur, brs. S.
 72.20 Wash, 10 lks. wide, course SW.
 79.94 The cor. of secs. 29, 30, 31 and 32.

Land, rolling.
 Soil, rocky 4th. rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and cacti.


West, on true line, bet. secs. 30 and 31.
 Over rolling land, thru scattering timber & undergrowth.
 Spur, brs. SW.
 3.00 Wash, 10 lks. wide, course SW.
 5.80 Wash, 5 lks. wide, course SW.
 15.90 Wash, 50 lks. wide, course SW.
 27.00 Wash, 10 lks. wide, course S.
 35.50 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 40.00 the ground for the 1/4 sec. cor. of secs. 30 & 31, with
 brass cap mkd.



1951

No bearing trees available; raise a mound of stone
 3 ft. base, 1 1/2 ft. high N. of cor. 3 ft. distant.

42.40 Wash, 20 lks. wide, course SW.
 43.03 Intersect the W. bdy. of Tp., at 4.25 chs. S.0°04'E., of
 the cor. of secs. 25 and 36, T.2 S., R. 5 W., herein-
 before described.
 At point of intersection set an iron post 3 ft. long,
 2 ins. in diam., 24 ins. in the ground for the closing
 cor. of secs. 30 & 31, with brass cap mkd.



1931 from which,
 a mesquite, 12 ins. in diam., brs. N.44°E., 86 lks.
 dist., mkd. T2S R4W S30 CC BT
 No other bearing trees available; raise a mound of stone
 4 ft. base, 2 ft. high E. of cor. 3 ft. distant.

Land, rolling.
 Soil, rocky and sandy 3rd. rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and cacti.

From the cor. of secs. 29, 30, 31, and 32,
 N.0°03'W., on true line, bet. secs. 29 and 30.
 Over rolling land, thru scattering timber & undergrowth.
 Road, brs. E. and NW.

3.60
 12.00 Wash, 5 lks. wide, course SW.
 15.00 Wash, 10 lks. wide, course SW.

Survey of the Subdivision Lines of T. 2 S., R. 4 W.

Chains

24.50 Shallow wash, 10 lks. wide, course SW.
 35.20 Shallow wash, 50 lks. wide, course SW. Along W. edge.
 of same wash.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for the $\frac{1}{4}$ sec. cor. of secs. 29 & 30,
 with brass cap mkd.

$\frac{1}{4}$

S30	S29
-----	-----

1931 from which,
 an ironwood, 10 ins. in diam., brs. N.39°W., 85 lks.
 dist., mkd. $\frac{1}{4}$ S30 BT
 an ironwood, 14 ins. in diam., brs. N.13°E., 93 lks.
 dist., mkd. $\frac{1}{4}$ S29 BT

43.00 Leave big wash, from NE.
 67.90 Head of wash, course SE.
 72.00 Low spur, brs. SW.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in
 the ground for the cor. of secs. 19, 20, 29 & 30,
 with brass cap mkd.

T2S	R4W
S19	S20
S30	S29

1931 from which,
 a paloverde, 8 ins. in diam., brs. N.51°W., 60 lks.
 dist., mkd. T2S R4W S19 BT
 No other bearing trees available.
 Raise a mound of stone 4 ft. base, 2 ft. high W. of
 cor. 3 ft. distant.

Land, rolling.
 Soil, rocky 4th. rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and cacti.

40.00 S.89°45'E., on random line, bet. secs. 20 & 29.
 79.98 Set temp. $\frac{1}{4}$ sec. cor.
 Fall 2 lks. S. of the cor. of secs. 20, 21, 28 and 29.
 Thence,
 N.89°46'W., on true line, bet. secs. 20 & 29.
 Over rolling land, thru scattering timber & undergrowth.
 1.00 Wash, 20 lks. wide, course S.
 11.60 Road, brs. NE-SW.
 14.50 Wash, 20 lks. wide, course SW.
 19.40 Road, brs. NE-SW.
 26.00 Center of wash, 100 lks. wide, course S.
 38.30 Wash, 5 lks. wide, course SW.
 39.99 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in
 the ground to bedrock, deposit a stone mkd. with a
 cross (X) at base of post, raise a mound of stone
 about post, for the $\frac{1}{4}$ sec. cor. of secs. 20 & 29,
 with brass cap mkd.

S20
$\frac{1}{4}$ S 29

1931
 No bearing trees available.

Survey of the Subdivision Lines of T. 2 S., R. 4 W.

Chains

50.40 Wash, 20 lks. wide, course SW.
 57.80 Wash, 10 lks. wide, course S.
 71.00 Wash, 20 lks. wide, course SE.
 79.98 The cor. of secs. 19, 20, 29 and 30.

Land, rolling.
 Soil, rocky 3rd. rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and cacti.

0.50 West, on true line, bet. secs. 19 and 30.
 9.60 Over rolling land, thru scattering timber & undergrowth.
 17.00 Wash, 10 lks. wide, course SW.
 34.00 Wash, 30 lks. wide, course S.
 40.00 Wash, 10 lks. wide, course S.
 40.00 Wash, 10 lks. wide, course SE.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. of secs. 19 & 30, with brass cap mkd.

S 19
 $\frac{1}{4}$ S 30

1931 from which,
 an ironwood, 16 ins. in diam., brs. N.73 $\frac{1}{2}$ °W., 140 lks. dist., mkd. $\frac{1}{4}$ S19 BT
 a paloverde, 10 ins. in diam., brs. S.83 $\frac{1}{2}$ °W., 146 lks. dist., mkd. $\frac{1}{4}$ S30 BT

42.00 Wash, 20 lks. wide, course S.
 43.10 Intersect the W. bdy. of Tp., at 4.19 chs. S.0°17'E. from the cor. of secs. 24 & 25, T.2 S., R.5, W., hereinbefore described.
 At intersection set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in the ground for the closing cor. of secs. 19 and 30, with brass cap mkd.

T2S T2S
 R5W S19
 S25 S30 CC
 R4W

1931
 No bearing trees available.
 Raise a mound of stone 4 ft. base, 2 ft. high E. of cor. 3 ft. distant.

Land, rolling.
 Soil, rocky 4th. rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and cacti.

0.60 From the cor. of secs. 19, 20, 29 and 30,
 4.00 N.0°03'W., on true line, bet. secs. 19 and 20.
 22.00 Over rolling land, thru scattering timber & undergrowth.
 35.00 Wash, 10 lks. wide, course SW. Continue up wash.
 40.00 Leave wash, turns to NE.
 40.00 Low spur, brs. S. Asc. gradually along E. side of same.
 40.00 Wash, 10 lks. wide, course S.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. of secs. 19 & 20, with brass cap mkd.

Survey of the Subdivision Lines of T. 2 S., R. 4 W.


Chains

	$\frac{1}{4}$ S19 S20 1931 No bearing trees available; raise a mound of stone 4 ft. base, 2 ft. high W. of cor. 3 ft. distant. Enter mountainous land, brs. E-W. Asc. 103 ft. over SW slope. 58.00 Spur, brs. SE. Desc. 57 ft. over NE slope. 70.00 Head of wash, course SE. Asc. gradual SW slope. 73.00 Low spur, brs. SE. 74.50 Wash, 10 lks. wide, course SW. 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 16 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the cor. of secs. 17, 18, 19 and 20, with brass cap mkd. <table style="margin-left: auto; margin-right: auto;"> <tr><td>T2S</td><td>R4W</td></tr> <tr><td>S18</td><td>S17</td></tr> <tr><td>S19</td><td>S20</td></tr> </table> 1931 No bearing trees available. Land, rolling and mountainous. Soil, rocky 3rd. and 4th. rate. Timber, paloverde and ironwood. Undergrowth, greasewood and cacti.	T2S	R4W	S18	S17	S19	S20
T2S	R4W						
S18	S17						
S19	S20						
40.00	S. 89°46'E., on random line, bet. secs. 17 & 20.						
80.10	Set temp. $\frac{1}{4}$ sec. cor. Fall 2 lks. S. of the cor. of secs. 16, 17, 20 & 21. Thence, N. 89°47'W., on true line, bet. secs. 17 & 20. Over mountainous land, thru scattering timber & undergrowth.						
20.00	Wash, 10 lks. wide, course SW.						
29.00	Wash, 50 lks. wide, course SW.						
37.40	Wash, 20 lks. wide, course S. Asc. 46 ft. over E. slope.						
40.05	Set an iron post 3 ft. long, 1 in. in diam., on bedrock, on cross (X) chiseled on same, raise a mound of stone about post, for the $\frac{1}{4}$ sec. cor. of secs. 17 & 20, with brass cap mkd. <table style="margin-left: auto; margin-right: auto;"> <tr><td>$\frac{1}{4}$ S 17</td></tr> <tr><td>S 20</td></tr> </table> 1931 from which, an 8 in. cross (X) chiseled on face of outcropping ledge, brs. SW 6 lks. dist. Also cut BO S20 alongside cross. Asc. 138 ft. over E. slope.	$\frac{1}{4}$ S 17	S 20				
$\frac{1}{4}$ S 17							
S 20							
52.10	Rocky spur, brs. S. Desc. 54 ft. over W. slope.						
57.70	Wash, 20 lks. wide, course S. Asc. 199 ft. over NE slope.						
63.10	Rocky spur, brs. SE. Asc. gradual SE slope.						
71.80	Rocky spur, brs. SW. Desc. 253 ft. over W. slope.						
78.00	Foot of steep slope, brs. N-S. Desc. gradually to						
80.10	The cor. of secs. 17, 18, 19 and 20. Land, mountainous. Soil, rocky 4th. rate. Timber, paloverde and ironwood. Undergrowth, greasewood and cacti.						

Survey of the Subdivision Lines of T. 2 S., R. 4 W.

Chains

West, on true line, bet. secs. 18 and 19.
 Over rolling land, thru scattering timber & undergrowth.
 6.00 Wash, 20 lks. wide, course SW.
 21.40 Wash, 50 lks. wide, course S.
 32.20 Wash, 10 lks. wide, course S.
 39.00 Wash, 10 lks. wide, course SE.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 15 ins. in
 the ground to bedrock, deposit a stone mkd. with a cross
 (X) at base of post, raise a mound of stone about
 post, for the $\frac{1}{4}$ sec. cor. of secs. 18 and 19, with
 brass cap mkd.




1931

No bearing trees available.

Asc. 63 ft. over NE slope.
 43.24 Intersect the W. bdy. of Tp., at 3.93 chs. S.0°25'E. of
 from the cor. of secs. 13 & 24, T. 22S., R. 5W., herein-
 before described.

At point of intersection set an iron post 3 ft. long,
 2 ins. in diam., 20 ins. in the ground, to bedrock,
 and raise a mound of stone around post, for closing
 cor. of secs. 18 & 19, with brass cap mkd.




1931

No bearing trees available.

Raise a mound of stone 4 ft. base, 2 ft. high E. of
cor. 3 ft. distant.

Land, rolling.
 Soil, rocky 4th. rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and cacti.

From the cor. of secs. 17, 18, 19, and 20,
 N.0°03'W., on true line, bet. secs. 17 and 18.
 Over mountainous land, thru scattering timber & undergrowth.
 Asc. 29 ft. over SW slope.
 15.00 Wash, 20 lks. wide, 10 ft. deep, course SW.
 Asc. 23 ft. over SW slope.
 26.40 Rocky spur, brs. SW. Desc. gradually over rolling NW slope.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in
 the ground to bedrock, deposit a stone mkd. with a cross
 (X) at base of post, raise a mound of stone about
 post, for the $\frac{1}{4}$ sec. cor. of secs. 17 & 18, with
 brass cap mkd.



1931

No bearing trees available.

Desc. gradually over NW slope.
 44.60 Center of wash, 30 lks. wide, 15 ft. deep, course SW.
 Continue up same wash.

Survey of the Subdivision Lines of T. 2 S., R. 4 W.

Chains

55.80 Leave big wash, which turns to NE.
 Asc. gradual SE slope.
 58.00 Spur, brs. SW. Desc. gradual SE slope.
 60.25 Wash, 10 lks. wide, course SW. Asc. 65 ft. over S. slope.
 66.00 Spur, brs. SW. Desc. gradual NW slope.
 68.00 Wash, 20 lks. wide, course SW.
 Asc. 159 ft. over SE slope to
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a mound of stone about post, for the cor. of secs. 7, 8, 17 & 18, with brass cap mkd.

T2S	R4W
S7	S8
S18	S17

1931

Land, mountainous.
 Soil, rocky 4th. rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and cacti.

40.00 S. 89°47'E., on random line, bet. secs. 8 and 17.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.08 Fall 9 lks. N. of the cor. of secs. 8, 9, 16 and 17.
 Thence,
 N. 89°43'W., on true line, bet. secs. 8 and 17.
 Over mountainous land, thru scattering timber & undergrowth.
 Asc. 239 ft. over broken NE slope.
 9.00 Rocky spur, brs. NE. Desc. 114 ft. over NW slope.
 18.90 Wash, near head, course N. Asc. 250 ft. over rolling E. slope, to ridge.
 22.80 Head of wash, course NE.
 34.40 Ridge, brs. NW-SE. Desc. 87 ft. over W. slope.
 37.60 Head of wash, course SW.
 Asc. gradual SE slope.
 40.04 Set an iron post 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise amount of stone about post, for the $\frac{1}{4}$ sec. cor. of secs. 8 & 17, with brass cap mkd.

$\frac{1}{4}$	S 8
	S 17

1931


No bearing trees available.
 Asc. 33 ft. over E. slope.
 41.70 Spur, brs. West. Desc. 84 ft. over W. slope.
 47.60 Wash, near head, course S. Asc. 73 ft. over E. slope.
 52.00 Rocky spur, brs. S. Desc. 59 ft. over W. slope.
 55.05 Wash, near head, course S. Asc. 60 ft. over E. slope.
 58.40 Rocky spur, brs. S. Desc. 61 ft. over W. slope.
 60.50 Head of wash, course S. Asc. 48 ft. over E. slope.
 67.00 Spur, slopes S. Desc. 36 ft. over W. slope.
 73.00 Head of wash, course SW. Desc. 109 ft. over SE slope.
 80.08 The cor. of secs. 7, 8, 17 & 18.
 Land, mountainous.
 Soil, rocky 4th. rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and cacti.

Survey of the Subdivision Lines of T. 2 S., R. 4 W.

Chains

West, on true line, bet. secs. 7 and 18.
 Over rolling, mountainous land, thru scattering timber & undergrowth.

8.20 Wash, 50 lks. wide, course S. Asc. 36 ft. over E. slope.
 14.00 Ridge, brs. N-S. Desc. 95 ft. over W. slope.
 23.90 Wash, 50 lks. wide, course S. Asc. 222 ft. over E. slope.
 36.30 Rocky spur, brs. S. Desc. 18 ft. over SW slope.
 40.00 Set an iron post 3 ft. long, 1 in. in diam.; 6 ins. in the ground to bedrock, deposit a rock mkd. with a cross (X) at base of post; raise a mound of stone about post, for the $\frac{1}{4}$ sec. cor. of secs. 7 and 18, with brass cap mkd.




1931

No bearing trees available.
 Continue on descent.

42.96 Intersect the W. bdy. of Tp., at 1.99 chs. S.0°09'W. from the cor. of secs. 12 & 13, T. 2 S., R. 5 W., hereinbefore described.

At point of intersection set an iron post 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post and raise a mound of stone around post, for closing cor. of secs. 7 and 18, with brass cap mkd.



1931


No bearing trees available.

Land, mountainous.
 Soil, rocky 4th. rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood and cacti.

From cor. of secs. 7, 8, 17, and 18,
 N.0°03'W., on true line, bet. secs. 7 and 8.
 Over mountainous land, thru scattering timber & undergrowth.

Asc. 16 ft. over W. slope.

18.60 Wash, near head, course SW. Asc. 172 ft. over SE slope.
 26.00 Rocky spur, brs. SW. Desc. 35 ft. over N. slope.
 28.50 Head of wash, course W. Asc. 57 ft. over S. slope.
 31.00 Rocky spur, brs. W. Desc. 19 ft. over NW slope.
 34.20 Wash, 20 lks. wide, course W. Asc. 30 ft. over SE slope.
 36.50 Rocky spur, brs. W. Desc. 43 ft. over NW slope.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. of secs. 7 & 8, with brass cap mkd.



1931

No bearing trees available; raise a mound of stone 4 ft. base, 2 ft. high W. of cor. 3 ft. distant.

Survey of the Subdivision Lines of T. 2 S., R. 4 W.

Chains

50.50 Desc. 156 ft. over NW slope.
Wash, 20 lks. wide, course NW.
Asc. 13 ft. over SW slope.
55.50 Low spur, brs. NW. Desc. 67 ft. over NE slope.
58.30 Wash, 20 lks. wide, course NW.
Asc. 233 ft. over rolling SW slope.
79.50 Rocky butte, on spur, brs. NW. Desc. 16 ft. over
N. slope to
80.00 Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in
the ground for the cor. of secs. 5, 6, 7 and 8, with
brass cap mkd.

T2S	R4W
S6	S5
S7	S8

1931

No bearing trees available; raise a mound of stone
4 ft. base, 2 ft. high W. of cor. 3 ft. distant.

Land, rolling and mountainous.
Soil, rocky 4th. rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and cacti.

40.00 S. 89° 43' E., on random line, bet. secs. 5 and 8.
Set temp. 1/4 sec. cor.
79.92 Intersect the cor. of secs. 4, 5, 8 and 9.
Thence,
N. 89° 43' W., on true line, bet. secs. 5 and 8.
Over mountainous land, thru scattering timber & under-
growth.
2.70 Wash, 10 lks. wide, course NW.
8.60 Wash, 20 lks. wide, course N.
Asc. 108 ft. over E. slope.
14.50 Rocky spur, brs. N. Desc. 48 ft. over W. slope.
17.40 Head of wash, course N.
Asc. 29 ft. over E. slope.
23.00 Rocky spur, brs. N. Desc. 92 ft. over W. slope.
29.80 Wash, 30 lks. wide, course NE. Asc. 19 ft. over SE
slope.
Lv. mountainous enter rolling land, brd. N-S.
39.96 Set an iron post 3 ft. long, 1 in. in diam., 16 ins. in
the ground to bedrock, deposit a stone mkd. with a
cross (X) at base of post, raise a mound of stone
about post, for the 1/4 sec. cor. of secs. 5 and 8,
with brass cap mkd.

1/4	S 5
	S 8
	1931


No bearing trees available.
41.00 Wash, 10 lks. wide, course NE.
45.30 Wash, 20 lks. wide, course NE.
Enter mountainous land, brs. N-S. Asc. 327 ft. over
rocky E. slope.
66.00 Rocky spur, brs. N. Continue ascent of 121 ft. over
N. slope to cor.
76.20 Head of wash, course NE.
79.92 The cor. of secs. 5, 6, 7 and 8.

Survey of the Subdivision Lines of T. 2 S., R. 4 W.

Chains

Land, mountainous.
Soil, rocky 4th. rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and cacti.


West, on true line, bet. secs. 6 and 7.
Over mountainous land; thru scattering timber & undergrowth.
Asc. 18 ft. over NE slope.
0.50 Rocky butte, on line, on spur, brs. NW.
Desc. 343 ft. over W. slope.
13.10 Wash, 20 lks. wide, course NW. Desc. 23 ft. over NE slope.
18.00 Spur, brs. NW. Desc. 138 ft. over rolling SW. slope.
34.40 Wash, 10 lks. wide, course NW. Asc. 12 ft. over NE slope.
40.60 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. of secs. 6 and 7, with brass cap mkd.



1931

No bearing trees available; raise a mound of stone 4 ft. base, 2 ft. high N. of cor. 3 ft. distant.

43.70 Intersect the W. bdy. of Tp., at 1.35 chs. S. 0°34' E. from the cor. of secs. 1 & 12, T. 2 S., R. 5 W., hereinbefore described.
At point of intersection set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in the ground for the closing cor. of secs. 6 and 7, with brass cap mkd.




1931

No bearing trees available; raise a mound of stone 4 ft. base, 2 ft. high E. of cor. 3 ft. distant.

Land, mountainous and rolling.
Soil, rocky 4th. rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and cacti.

From the cor. of secs. 5, 6, 7, and 8,
N. 0°03' W., on true line, bet. secs. 5 and 6.
Over mountainous land; thru scattering timber & undergrowth.
Desc. 379 ft. over N. slope.
15.00 Wash, near head, course NE. Asc. 84 ft. over SE slope.
17.00 Spur, brs. NE. Lv. mountainous, enter rolling land, brs. E-W.
33.70 Wash, 10 lks. wide, course E.
Asc. gradual S. slope.
40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. of secs. 5 and 6, with brass cap mkd.



1931

No bearing trees available.
Raise a mound of stone 3 ft. base, 2 ft. high W. of cor. 3 ft. distant.

Survey of the Subdivision Lines of T. 2 S., R. 4 W.

48.00 Desc. gradual N. slope.
Wash, 10 lks. wide, course NE.
Asc. 142 ft. over S. slope.

61.50 Rocky spur, brs. NW. Desc. 151 ft. over NE slope.

66.60 Enter wash, 30 lks. wide, course N. Continue down same.

71.20 Lv. wash, course NW,
Asc. 34 ft. over S. slope.

81.35 Intersect the S. bdy. of T. 1 S., R. 4 W., at 4.65 chs. N. 88° 52' E., from the 1/4 sec. cor. of sec. 31, hereinbefore described.

At point of intersection set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, and raise a mound of stone around post, for closing cor. of secs. 5 & 6, with brass cap mkd.

T1S R4W
S31

S6	S5
T2S	R4W

CC
1931

N. bearing trees available.

Land, rolling and mountainous.
Soil, rocky 4th. rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood and cacti.

For the continued satisfactory condition of the instrument refer to Preliminary Field Test of Buff Transit No. 18,000 in Book "D" of this group (Field Notes-T. 3S-R. 4W.)

General Description.

Land; mountainous in the North central portion, called locally the Buckeye Hills, with point of highest elevation in section 10; being about 1200 ft. above the southwest corner of the Tp. ; rolling desert elsewhere.

Soil, ranges from sandy loam, 1st and 2nd rate in the valley desert valleys to, a rocky 4th. rate on slopes of the mountains into the river.

Timber, paloverde and ironwood predominates with merchant-able values as firwood only in ranges from sandy

Undergrowth, greasewood and the various forms of cacti, including the spiny ones cover the Tp.

Water; there is a well located in sec. 33. This is the only permanent developed water in the Tp.

Settlement; the settlers residing within the Tp. at time of the survey were located in secs. 25, 26 and 28. Houses were found in secs. 24 and 31 and 33 also.

Roads; numerous roads, some in fair condition render the Tp. accessible to motorized vehicles.

Mineral; No evidence of mineral found except some cuts and diggings in the Buckeye Hills.

BOOK 3927

4-680
(August, 1926)

FIELD ASSISTANTS.
to
Karl L. Siebecker, U.S. Surveyor.

NAMES.	CAPACITY.
Owen B. Wright	1st Chainman.
L.A. Burgess	2nd Chainman.
John McClung	Cornerman.
A. F. Gray	Flagman.
Calvin McClung	Axman.

BOOK 3927

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Karl L. Siebecker, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer, for Group 164 Arizona bearing date of the 15th day of July, 1930, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, ^{re} surveyed all those parts or portions of the South Boundary of Township 1 South, Range 4 West and the East Boundary of Township 2 South, Range 5 West of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes ^{and by diagram on page 2 hereof} as having been executed by me, and under my direction; and that all the corners of said ^{re} survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer, for Group 164, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such ^{re} survey.

Karl L. Siebecker
 U. S. Surveyor
 San Francisco, Calif July 11, 1930

~~APPROVAL.~~

~~OFFICE OF U. S. SUPERVISOR OF SURVEYS,~~

~~193~~

~~The foregoing field notes of the survey of~~

~~executed by~~

~~under his special instructions dated _____, 19____, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.~~

~~U. S. Supervisor of Surveys.~~

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~

~~_____ has been correctly copied from the original notes on file in this office.~~

~~U. S. Supervisor of Surveys.~~

4-680
(August, 1924)

FOOTING 3027

FIELD ASSISTANTS.
to
Benjamin J. Kinsey, U.S. Surveyor

NAMES.	CAPACITY.
McMillan Pollock	1st Chainman
Theodore Smith	2nd Chainman
Howard Osborn	Cornerman
Charles S. Ferris	Axman
William Gavin	Flagman
F.M. Biddlecome	Axman
Herman Shafer	Axman

BOOK 3927

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Benjamin J. Kinsey, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer, for Group 164, Arizona bearing date of the 15th day of July, 1930, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of

the East Boundary

and

Subdivision Lines of

Township 2 South, Range 4 West of the Gila and Salt

River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes and by diagram on page 2 hereof as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer, for Group 164, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place: Phoenix, Arizona.

Date: May 20-1932.

Benjamin J. Kinsey U. S. Surveyor.

APPROVAL.

OFFICE OF U. S. SUPERVISOR OF SURVEYS,

Denver, Colo., June 14, 1932

The foregoing field notes of the resurvey of the South boundary of Township 1 South Range 4 West and the East boundary of Township 2 South, Range 5 West and of the survey of

the East boundary and

Subdivision Lines of

Township 2 South, Range 4 West

of the Gila and Salt River Base and Meridian, in the State of Arizona

executed by Karl L. Siebecker and Benjamin J. Kinsey, U.S. Surveyors.

under special instructions dated July 15, 1930 for Group 164 Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the resurveys and surveys they describe, are hereby approved.

U. S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above described surveys in has been correctly copied from the original notes on file in this office.

U. S. Supervisor of Surveys.