

BOOK 4010

FIELD NOTES

OF RETRACEMENT OF

Part of NE. side line (1-2) of "Ellen No.1" pat. lode mining claim
Mineral Survey No.2424, Thumb Butte Mining District, Ariz.
Secs.34 & 35, T.14 N.,R.3 W.

OF RESURVEY OF

South and East Bdrs., & Part of the Subdivision Lines of
Township 14 North, Range 3 West

AND OF SURVEY OF

West boundary, & Part (Completion) of Subdivision Lines of
Township 14 North, Range 3 West

Boundaries of Tracts Nos. 37 to 45, both inclusive, in said Tp.

AND

Traverses to Springs, Houses, & other Improvements in Iron Springs

Of the Gila and Salt River Base and Meridian,

in the State of Arizona

EXECUTED BY

Benjamin J. Kinsey, U.S. Surveyor

the capacity of U. S. Surveyor, under Special Instructions dated April 16, 1930, issued by the District Cadastral Engineer to govern surveys included in Group No. 157 Arizona, which were approved by the Commissioner of the General Land Office, April 25, 1930, and Assignment Instructions dated May 22, 1931

Retracement, Resurvey & Survey commenced June 1, 1931

Retracement, Resurvey & Survey completed August 9, 1934

INDEX DIAGRAM.


Township _____, Range _____

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

REPRODUCED FROM THE ORIGINAL

4010
INDEX DIAGRAM
T.14N., R.3W.

BOOK 4010

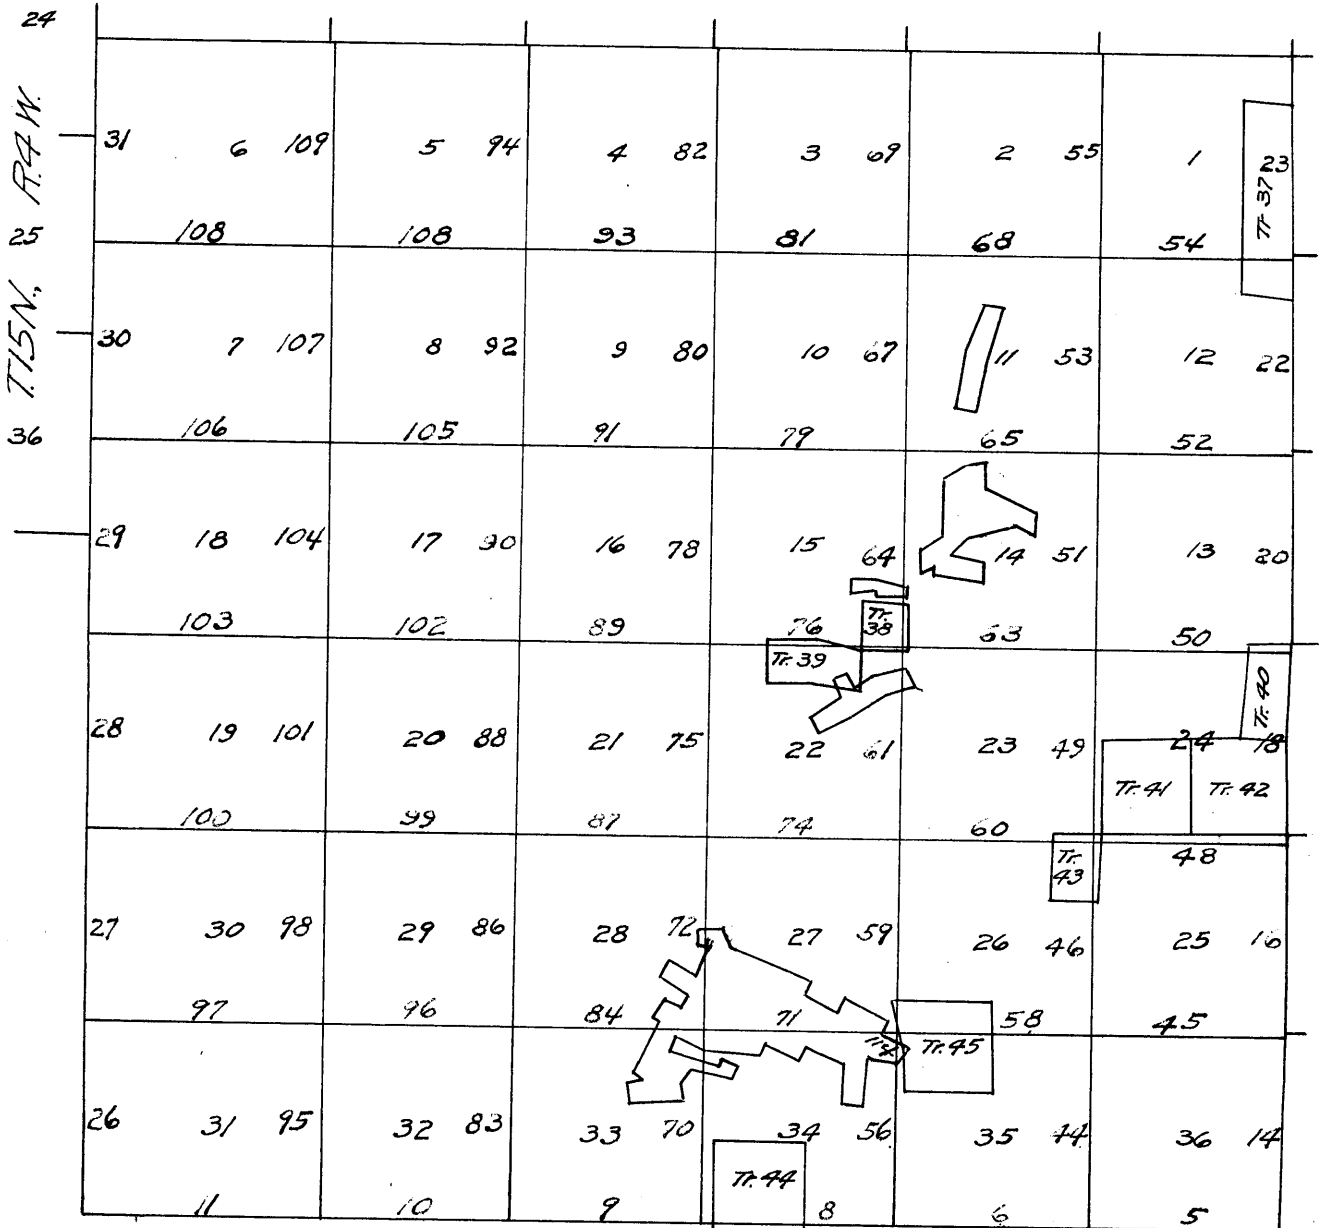

	Tract	Page	Notes
	37,	33	Traverse to locate roads and springs, 111, 112, 113, 114
	38,	33	U.S.G.S. B.M.
	39,	35	111
	40,	36	
	41,	37	
	42,	39	
	43,	39	
	44,	40	
	45,	42	

The resurveys and surveys herein described were executed on dates shown on diagram on page 2 hereof, by Benjamin J. Kinsey, U.S. Surveyor, using Buff solar transits Nos. 18,000 and 16,724 and Young and Sons solar transit No. 8540; the instruments are equipped with the Smith solar attachment and otherwise conform to the standard requirements of the General Land Office. The instruments were examined, tested on the true meridian at the Federal Building, Phoenix, Arizona by the District Cadastral Engineer for Arizona and California, found correct and approved conditional upon satisfactory field tests.

All azimuth determinations are accomplished with the solar attachment except the special observations upon the sun and Polaris for meridian's upon which to test the solar attachments as stated in the field notes.

PRELIMINARY FIELD TEST

of
Buff solar transit No. 18,000 ✓
and
Young and Sons Transit No. 8540 ✓
by
Benjamin J. Kinsey, U.S. Surveyor.

May, 29, 1931: at station in camp, near the center of sec. 15, T. 14 N., R. 3 W., Gila and Salt River Base and Meridian, Arizona, latitude 34° 35' N., and approximate longitude 112° 34' W., examine the adjustments of the transits and find no errors.

May, 30: at same station, at 3h. 11m., a.m., l.m.t., observe Polaris at eastern elongation, making four observations, two each with the telescope in direct and reversed positions, marking the line thus determined by a tack set in top of a peg, driven firmly in the ground about 4 chs. northerly.

Azimuth of Polaris at eastern elongation: 1° 17' 47" ✓

At daylight, lay off the azimuth of Polaris 1° 17' 47" to the west and mark the meridian thus determined by a tack, set in top of a peg cemented in the ground about 4chs. north.

At 9h. 00m., a.m., app.t., set off 34° 35' N., on lat. arc, 21° 42' N., on decl. arc and determine a meridian with the solar which agrees with the true meridian.

At 12h. 00m., app. noon, with lat. arc unchanged observe the sun on the meridian; the resultant reading of the decl. arc is 21° 43' N., which agrees with the computed declination of the sun.

At 3h. 00m., p.m., app.t., with lat. arc unchanged, set off 21° 44½' N., on the decl. arc and determine a meridian with the solar which agrees with the true meridian.

As all of the observations taken during the usual hours of solar work agree within 1' of the true meridian, conclude that the instruments are in a satisfactory state of adjustment.

The adjustments of Young & Sons solar transit No. 8540 having been carefully checked on May, 29, 1931 and no errors found, immediately after the above test of Buff transit No. 18,000 and at substantially the same

Independent Resurvey
of
the South Bdy. of T. 14 N., R. 3 W.

4

time, with the proper declinations and latitude set off on the respective arcs; determine meridians and make noon tests; the resultant indications are within 30" of the true meridian, so conclude that the instrument is in a satisfactory state of adjustment.

PRELIMINARY FIELD TEST
of
Buff transit No. 16,724
by
Benjamin J. Kinsey, U.S. Surveyor.

June, 7, 1931: at same station as described on page 3 hereof, examine the adjustments of the transit and find no errors.

At 8h. 00m., a.m., app. t., set off $34^{\circ} 35'$ N., on the latitude arc, $22^{\circ} 43'$ N. on the decl. arc and determine a meridian with the solar which agrees with the true meridian.

At 12h. 00m., app. noon, with lat. arc unchanged, observe the sun on the meridian; the resultant reading of the decl. arc is $22^{\circ} 43\frac{1}{2}'$ N., which agrees with the computed declination of the sun.

At 3h. 00m., p.m., app. t., with lat. arc unchanged, set off $22^{\circ} 44\frac{1}{2}'$ N., on the decl. arc and determine a meridian with the solar which I find to agree with the true meridian.

As all of the observations taken during the usual hours of solar work, agree within 1' of the true meridian, conclude that the instrument is in a satisfactory state of adjustment.

May 31, 1931: in approximate latitude $34^{\circ} 35'$ N., and longitude $112^{\circ} 34'$ W., make a meridian observation of the sun for time and latitude, observing simultaneously the altitude of the suns lower limb and the transit of the suns west limb, reversing the telescope and observing simultaneously the altitude of the suns upper limb and the transit of the suns east limb:

Mean observed altitude : $77^{\circ} 17' 12''$.
Reduced latitude : $34^{\circ} 34' 55''$

Mean watch time of obsn. : 12h. 27m. 52s.
Watch fast of l.m.t. : 30m. 29s.

23

BOOK 4010

Independent Resurvey
of
the South Bdy. of T. 14 N., R. 3 W.

Chains

5

The south boundary of T. 14 N., R. 3 W., was surveyed in 1871 by S. W. Foreman, U.S.D.S., who established cors. thereon with a common reference to areas on both sides of the line. No retracements or resurveys of any part of the line are of record.

The following notes describe an independent resurvey of the entire line, establishing cors. thereon with reference to areas on the north side of the line only.

From the corner of T. 13 N., R. 3 W., and T. 14 N., R. 4 W., established at a distance equal in northing to the east bdy. of T. 13 N., R. 3 W.,

East, on a random line, setting temporary $\frac{1}{4}$ sec. and sec. cors. at intervals of 40 chs., along the line on the S. bdy. of T. 14 N., R. 3 W., and at 478.32 chs. fall 25 lks. S. of the reconstructed original cor. of Ts. 13 and 14 N., Rs. 2 and 3 W., described in the notes of the resurvey of T. 13 N., R. 2 W., this group. The correction is 4.2 lks. per mile counting from the place of beginning.

Thence,

S. 89° 58' W., on true line, on south bdy. of sec. 36.

Over mountainous land, through thick timber and undergrowth.

Asc. 72 ft. over SE slope.

7.20 Spur, bears SE. Desc. gradual SW slope, to wash.

14.72 Trail, bears N. and S.

22.15 Wash, 20 lks. wide, course SE. Asc. 89 ft. over E. slope.

29.70 Spur, bears SE. From which, Thumb Butte bears N. 30° E.

Desc. gradual SW slope.

34.00 Wash, 10 lks. wide, course SE. Asc. 14 ft. over E. slope.

39.58 From which,
the original $\frac{1}{4}$ sec. cor. of secs. 1 and 36, which is a stone 6 x 10 x 14 ins. above ground and mound of stone, firmly set, marked $\frac{1}{4}$ on N. face, bears S. 2 chs. dist. I destroy all evidence of this cor. monument.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock, raise a mound of stone about post, for the reestablished $\frac{1}{4}$ sec. cor. of sec. 36, with brass cap marked

$\frac{1}{4}$ S 36

1931

from which,

an oak, 16 ins. in diam., bears N. 35° E., 202 lks. dist., marked $\frac{1}{4}$ S.36 BT

a juniper, 30 ins. in diam., bears N. 9° W., 89 lks. dist., marked $\frac{1}{4}$ S 36 BT

Independent Resurvey
of
the South Bdy. of T. 14 N., R. 3 W.

6

Chains

- Asc. 29 ft. over SE slope.
- 43.10 Spur, bears SE. Asc. 53 ft. over SE slope.
- 51.00 Ridge, bears NE and SW. Trail bears NE and SW.
Desc. gradual NW slope.
- 53.25 Wash, near head, course N. Asc. gradual NE slope.
- 59.30 Head of wash, course NE. Asc. 120 ft. over NE slope.
- 70.50 Ridge, bears N. and SE. Desc. 150 ft. over W. slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, raise a mound of stone about post, for the reestablished cor. of secs. 35 and 36, with brass cap marked
- T 14 N R 3 W
S 35 | S 36
- 1931
- from which,
- a juniper, 10 ins. in diam., bears N. 0° 15' E., 115 lks. dist., marked T 14 N R 3 W S 36 BT
- a juniper, 8 ins. in diam., bears N. 57° W., 95 lks. dist., marked T 14 N R 3 W S 35 BT
- The original cor. of secs. 1, 2, 35 and 36, which is a stone 8 x 10 x 12 ins. above ground, firmly set and marked with one notch and five notches, on E. and W. faces respectively, bears S. 10° E., 259 lks. dist. Destroy all evidence of this cor. monument.
- Land, mountainous.
Soil, rocky 4th. rate.
Timber, yellow pine, oak and juniper.
Undergrowth, oakbrush, manzanita and cacti.
-
- S. 89° 58' W., on true line, on S. bdy. of sec. 35.
- Over mountainous land, through thick timber & undergrowth.
- Desc. 271 ft. over W. slope to main wash.
- 9.40 Wash, 10 lks. wide, course NW. Asc. slight NE slope.
- 12.00 Spur, bears NW. Desc. slight NW slope.
- 14.90 Rocky wash, 30 lks. wide, course N. Scattered pools of good water along washbed. Asc. 131 ft. over SE slope to ridge.
- 15.36 Old road, bears N. and S.
- 20.00 Enter large granite boulders, bear N. and S.
- 30.35 Head of wash, course SE. Asc. slight NE slope.
- 31.35 Ridge, bears NE and SW. Continue along rolling N. slope.

Independent resurvey
of
the South Bdy. of T. 14 N., R. 3 W.

BOOK 4010

7

Chains 34.15	Wash, 10 lks. wide, course NW.				
37.30	Wash, 10 lks. wide, course NW.				
40.00	<p>Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in 12 ins. in the ground to bedrock, raise a mound of stone about post, for the reestablished $\frac{1}{4}$ sec. cor. of sec. 35, with brass cap marked</p> <p style="text-align: center;"><u>$\frac{1}{4}$ S 35</u> 1931</p> <p style="text-align: right;">from which</p> <p>a yellow pine, 12 ins. in diam., bears N. 46° E., 93 lks. dist., marked $\frac{1}{4}$ S 35 BT.</p> <p>a yellow pine, 10 ins. diam., bears N. 67$\frac{1}{2}$° W., 72 lks. dist., marked $\frac{1}{4}$ S 35 BT.</p> <p>The original $\frac{1}{4}$ sec. cor. of secs. 2 and 35, which is a pitch pine, 18 ins. in diam., mkd. $\frac{1}{4}$ on N. face, bears S. 19° E., 307 lks. dist.; from which a yellow pine, 18 ins. in diam., bears S., 21 lks. distance, marked $\frac{1}{4}$ S BT. I destroy all evidence of this cor. monument.</p> <p>Continue over rolling, broken N. slope.</p>				
40.63	Wash, 5 lks. wide, course N.				
43.50	Wash, 20 lks. wide, course N.				
46.40	Wash, 10 lks. wide, course NE.				
49.70	Wash, 20 lks. wide, course NE.				
55.20	Old road, bears NE. and SW.				
56.50	Wash, 15 lks. wide, course NE.				
58.40	Wash, 30 lks. wide, course NE. A small stream of good water in this wash flows NE. Ascend 131 ft. over SE. slope.				
62.50	Old road, bears NE. and SW.				
72.50	Ridge, bears N. and S. Desc. gradually W. slope.				
80.00	<p>Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, raise a mound of stone about post, for the reestablished cor. of secs. 34 and 35, with brass cap marked</p> <p style="text-align: center;"> <table border="1" style="margin: auto;"> <tr> <td style="padding: 2px;">T 14 N</td> <td style="padding: 2px;">R 3 W</td> </tr> <tr> <td style="padding: 2px;">S 34</td> <td style="padding: 2px;">S 35</td> </tr> </table> </p> <p style="text-align: right;">1931 from which</p> <p>a yellow pine, 8 ins. diam., bears N. 45° W., 14 lks. dist., marked T.14 N R 3 W S 34 BT</p> <p>a yellow pine, 30 ins. in diam., bears N. 21$\frac{1}{2}$° E., 91 lks. dist., marked T 14 N R 3 W S 35 BT.</p> <p>The original cor. of secs. 2, 3, 34 and 35, which is a stone, 8 x 12 x 10 ins. above ground, firmly set in a mound of stone, bears S. 15$\frac{1}{2}$° E., 440 lks. dist.</p> <p>I destroy all evidence of this cor. monument.</p>	T 14 N	R 3 W	S 34	S 35
T 14 N	R 3 W				
S 34	S 35				

Independent resurvey
of
the South Bdy. of T. 14 N., R. 3 W.

Land, mountainous.
Soil, rocky 4th rate.
Timber, yellow pine, oak and juniper.
Undergrowth, oak brush, manzanita and cacti.

S. 89° 58' W., on true line, on S. bdy. of sec. 34.

Over mountainous land, through thick timber and undergrowth.

Desc. gradual W. slope.

- 2.00 Wash, 10 lks. wide, course SE.
- 4.10 Old road, bears NE. and SW.
- 14.70 Wash, 10 lks. wide, course NW. Asc. 25 ft. over NE. slope.
- 20.30 Spur, bears N. Desc. 25 ft. over NE. slope.
- 22.30 Wash, 10 lks. wide, course N. Asc. 199 ft. over NE. slope.
- 33.25 Wash, near head, course SE.
- 36.95 N. end of knoll, about 1 ch. long, bears N. and S. Across level top of same.
- 37.50 Leave top, desc. 290 ft. over steep W. slope to $\frac{1}{4}$ sec. cor.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, raise a mound of stone about post. for reestablished $\frac{1}{4}$ sec. cor. of sec. 34, with brass cap marked

$\frac{1}{4}$ S 34

1931

from which

a yellow pine, 14 ins. in diam., bears N. 25° E., 15 lks. dist., marked $\frac{1}{4}$ S 34 BT.

a yellow pine, 12 ins. in diam., bears N. 30° W., 29 lks. dist., marked $\frac{1}{4}$ S 34 BT.

Desc. 329 ft. over W. slope.

- 49.20 Wash, in bottom of Willow Creek, 50 lks. wide. in center of which is a stream of good water, 10 lks. wide, 4 ins. deep, coursing northerly. Leave timber, across rolling open land.
- 50.70 Rail fence, bears NW. and S. A barn, bears south, 50 lks. dist.
From barn, house of William Deering, bears south, about 3 chs. distant.
From house, a good spring of water, bears SE. about 2 chs. dist.
- 52.00 Rail fence, bears N. and S.
- 52.20 Road, bears N. and S.
- 56.20 Wire fence, bears N. and S.
- 56.30 Wash, 10 lks. wide, course NE. Asc. gradual E. slope.

Independent resurvey
of
the South Bdy. of T. 14 N., R. 3 W.

BOOK 4010

9

Chains					
60.00	Leave open land, enter heavy timber, bears N. and S.				
69.20	Shallow wash, 20 lks. wide, course NE. Asc. 50 ft. over NE. slope.				
78.20	Spur, bears SE. South edge of granite boulder 20 x 20 x 8 ft. high, on line at this point. Desc. gradual W. slope of spur.				
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bedrock, raise a mound of stone about post, for the reestablished cor. of secs. 33 and 34, with brass cap marked				
	<table border="1" style="margin: auto;"> <tr> <td>T 14 N</td> <td>R 3 W</td> </tr> <tr> <td>S 33</td> <td>S 34</td> </tr> </table>	T 14 N	R 3 W	S 33	S 34
T 14 N	R 3 W				
S 33	S 34				
	1931				
	from which				
	an oak, 8 ins. in diam., bears N. 3° E., 29 lks. dist. mkd. T. 14 N.R 3 W S 34 BT.				
	an oak tree, 8 ins. in diam., bears N. 55° W.. 15 lks. dist., mkd. T 14 N R 3 W S 33 BT.				
	Land, mountainous. Soil, rocky 4th rate. Timber, yellow pine, oak and juniper. Undergrowth, oak brush, manzanita, catclaw and cacti.				

	S. 89°58'W., on true line, on S. bdy. of sec. 33.				
	Over mountainous land, through thick timber and undergrowth.				
1.00	Desc. gradual NW. slope.				
3.80	Head of wash, course NE. Asc. 40 ft. over SE. slope.				
9.00	Spur, bears S. Desc. gradual SW. slope.				
10.20	Wash, 15 lks. wide, course SE. Asc. 52 ft. over NE. slope.				
15.30	Spur, bears S. Desc. 22 ft. over SW. slope.				
17.40	Wash, 10 lks. wide, course S. Thence over rolling S. slope.				
18.45	Wash, 10 lks. wide, course SE. Asc. 15 ft. over SE. slope.				
21.50	Desc. 10 ft. over SW. slope.				
23.00	Wash, 10 lks. wide, course SE. Asc. 117 ft. over NE. slope.				
29.50	Spur, bears SE. Desc. 16 ft. over SW. slope.				
31.35	Wash, 5 lks. wide, course SE. Asc. 84 ft. over SE. slope.				
38.00	Desc. 15 ft. over SW. slope.				
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 22 ins. in the ground to bedrock, raise a mound of stone about post, for the reestablished cor. of sec. 33, with brass cap marked				

Independent resurvey
of
the South Bdy. of T. 14 N., R. 3 W.

Chains

¼ S 33

1931

from which

an oak, 8 ins. in diam., bears N. 37° E., 4 lks. dist.
mkd. ¼ S 33 BT.

An oak, 6 ins. in diam., bears N. 50° W., 43 lks.
dist., mkd. ¼ S 33 BT.

Diligent search in this vicinity reveals no evidence of
the original ¼ sec. cor. of secs. 4 and 33. At reg-
ular intervals to the west search for evidence of the
original cors. fails to reveal any trace of same.

Desc. 13 ft. over SE. slope.

- 41.30 Wash, 10 lks. wide, course SE. Tunnel of the Mistake
Mine, bears south, about 2 chs, dist. Asc. 224 ft.
over SE. slope to divide.
- 43.60 Old road, bears N. and S. A house bears SE. 20 lks. dist.,
About 50 lks. SE. is end of a pipe line from which
flows a small stream of water.
- 52.00 Divide, bears N. and S. Across level top.
- 52.25 Old road, bears N. and S.
- 53.00 Desc. 169 ft. over NW. slope.
- 60.20 Rocky wash, 20 lks. wide, in bottom of Spruce Canyon,
course N. Asc. 71 ft. over NE. slope.
- 63.60 Spur, bears N. Desc. 36 ft. over NW. slope.
- 68.15 Wash, 30 lks. wide, course N. Asc. 45 ft. over NE. slope.
- 69.60 Spur, bears N. Desc. 36 ft. over NW. slope.
- 74.50 Wash, 10 lks. wide, course N. Asc. 16 ft. over E. slope.
Enter scattering timber.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in
the ground to bedrock, deposit a stone marked with a
cross (X) at base of post, raise a mound of stone about
post, for the reestablished cor. of secs. 32 and 33,
with brass cap marked

T 14 N | R 3 W

S 32 | S 33

1931

No suitable bearing trees available.

Land, mountainous.

Soil, rocky 4th rate.

Timber, yellow pine, oak and juniper.

Undergrowth, oak brush, manzanita and cacti.

S. 89°58'W., on true line, on S. bdy. of sec. 32.

Over mountainous land, through scattering timber and thick
undergrowth.

Independent resurvey
of
the South Bdy. of T. 14 N., R. 3 W.

BOOK 4010

11

Chains	Asc. 193 ft. over E. slope.
5.15	Spur, bears NW. Desc. 373 ft. over W. slope.
14.40	Wash, 50 lks. wide, course NW. Asc. 50 ft. over NE. slope.
15.60	Spur, bears N. Desc. 40 ft. over NW. slope.
18.50	Wash, 20 lks. wide, course NW. Asc. 43 ft. over NE. slope.
20.80	Spur, bears NW. Desc. 136 ft. over W. slope.
25.40	Wash, 50 lks. wide, course NW. Asc. 12 ft. over NE. slope.
26.50	Spur, bears NW. Desc. 39 ft. over NW. slope.
29.05	Wash, 30 lks. wide, course N. Asc. 123 ft. over NE. slope.
35.10	Ridge, bears NW. and SE. Desc. 38 ft. over SW. slope, to $\frac{1}{4}$ sec. cor.
36.20	Trail, bears NW. and SE. (From Prescott to Skull Valley).
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post, for the reestablished $\frac{1}{4}$ sec. cor. of sec. 32, with brass cap marked

$\frac{1}{4}$ S 32

1932

No suitable bearing tree available.

Desc. 133 ft. over SW. slope.

46.00	Wash, 30 lks. wide, course SW. Asc. slightly SE. slope.
47.40	Spur, bears S. Desc. 229 ft. over SW. slope.
56.90	Enter wash, 30 lks. wide, from SE. to W., desc. 16 ft. down same.
60.50	Leave wash, turns to SW. Desc. 10 ft. over W. slope to
69.65	Spur, bears SW. Desc. 124 ft. over W. slope to
74.20	Wash, 20 lks. wide, course S. Asc. 88 ft. over SE. slope.
79.35	Spur, bears SW. Desc. 10 ft. over W. slope, to
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, raise a mound of stone about post, for the reestablished cor. of sec. 31 and 32, with brass cap marked

T 14 N | R. 3 W
S 31 | S 32

1931

No suitable bearing trees available.

Land, mountainous.

Soil, rocky; 4th rate.

Timber, yellow pine, oak and juniper.

Undergrowth, oak brush, manzanita and cacti.

Independent resurvey
of
the South Bdy. of T. 14 N., R. 3 W.

Chains	<p>S. 89°58'W., on true line, on S. bdy. of sec. 31.</p> <p>Over mountainous land, through very scattering timber and thick undergrowth.</p> <p>Desc. 166 ft. over W. slope.</p> <p>6.10 Wash, 10 lks. wide, course SW. Asc. 64 ft. over NE. slope.</p> <p>6.90 Spur, bears S. Desc. 11 ft. over SW. slope.</p> <p>11.10 Wash, 20 lks. wide, course S. Asc. 40 ft. over SW. slope.</p> <p>13.75 Spur, bears S. Desc. 20 ft. over SW. slope.</p> <p>16.00 Wash, 20 lks. wide, course SE. Asc. 184 ft. over SE. slope.</p> <p>23.50 Spur, bears S. Desc. 326 ft. over W. slope.</p> <p>29.70 Wash, 15 lks. wide, course SW. Asc. 20 ft. over SE. slope.</p> <p>30.60 Spur, bears SW. Desc. 85 ft. over SW. slope.</p> <p>35.40 Wash, 10 lks. wide, course S. Asc. 89 ft. over E. slope.</p> <p>40.00 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, with a mound of stone to top, for the $\frac{1}{4}$ sec. cor. of sec. 31, with brass cap marked</p>
	<p><u>$\frac{1}{4}$ S 31</u></p> <p>1931</p>
	<p>No bearing trees available.</p> <p>Asc. 224 ft. over E. slope.</p> <p>49.35 Ridge, bears N. and S. Desc. 495 ft. over W. slope.</p> <p>64.15 Wash, 15 lks. wide, course NW. Asc. 19 ft. over NE. slope.</p> <p>70.30 Intersect the cor. of T. 13 N., R. 3 W., and T. 14 N., R. 4 W., an iron post with brass cap marked and witnessed as described in the notes of the survey of the west bdy. of T. 13 N., R. 3 W. of this group.</p> <p>Continue along NW. slope, descending 188 ft. to</p> <p>85.00 Spur, bears NW. Desc. 68 ft. over SW. slope.</p> <p>87.44 Wash, 10 lks. wide, course NW. Asc. 22 ft. over NE. slope.</p> <p>91.20 Spur, bears NW. Desc. 76 ft. over W. slope.</p> <p>101.00 A point due south of the SE. cor. of T. 15 N., R. 4 W., hereinafter described, set an iron post, 3 ft. long, 3 ins. in diam., 18 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the reestablished cor. of T. 14 N., R. 3 W. only, with brass cap marked</p>

T 14 N
R 3 W
S 31

1931

Independent resurvey
of
the South Bdy. of T. 14 N., R. 3 W.

BOOK 4010

13

Chains No. bearing trees available.

Land, mountainous.
Soil, rocky 4th rate.
Timber, pinon and oak.
Undergrowth, oak brush, manzanita and cacti.

Resurvey of the East Bdy. of T. 14 N., R. 3 W.

The line between Tps. 14 N., Rs. 2 and 3 W., was surveyed by S. W. Foreman, U. S. D. S. in 1871, who established corners along this line with common reference to areas of both sides of the line. Under Group 140, S. E. Blout, U. S. C. E., reconstructed the corner of secs. 19, 24, 25 and 30 for control in connection with the reestablishment of the cor. of Tps. 14 and 15 N., Rs. 2 and 3 W., but afterwards finding same and reconstructing it in its original position abandoned the cor. of secs. 19, 24, 25 and 30 as a control point. No other retracements or resurveys of any part of the line are of record.

The following notes describe a dependent resurvey of the east boundary of T. 14 N., R. 3 W., incidentally restoring missing original corners by proportionate methods and reconstructing existing original corners, altering same to refer to T. 14 N., R. 2 W., only.

Retracement for Resurvey

From the cor. of Tps. 13 and 14 N., Rs. 2 and 3 W.

N. $1^{\circ}25'E.$, on random line, on bearing determined by previous retracement of this line in 1929, on W. bdy. of sec. 31.

40.00 No evidence of the original $\frac{1}{4}$ sec. cor. of secs. 31 and 36 found after diligent search.

83.36 Intersect the original cor. of secs. 25, 30, 31 and 36. hereinafter described.

True course and distance are therefore N $21^{\circ}25'E.$, 83.36 chs.

Thence, from cor.

North, on random line, on W. bdy. of sec. 30.

40.00 No evidence of the original $\frac{1}{4}$ sec. cor. of secs. 25 and 30 found after diligent search. Continue line and measurement.

79.20 Fall 120 lks. E. of the original reconstructed cor. of secs. 19, 24, 25 and 30.

True course and distance are therefore N. $0^{\circ}52'W.$, 79.20 chs.

Thence, from cor.,

14

Resurvey of the East Bdy. of T. 14 N., R. 3 W.

Chains	N. 1°35'E., on random line, toward flag visible on the $\frac{1}{4}$ sec. cor. of secs. 19 and 24, on W. bdy. of sec. 19, S. $\frac{1}{2}$.
40.08	Intersect the accepted point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 24 True course and distance are therefore N. 1°35'E., 40.08 chs.

	Thence, from cor., N. 4°25'E., on true line toward flag visible on objective corner, on W. bdy. of sec. 19, N. $\frac{1}{2}$.
40.66	Intersect the original corner of secs. 13, 18, 19 and 24, hereinafter described. True course and distance are therefore N. 4°25'E., 40.66 chs.

	Thence, from cor., N. 3°23'W., on true line, toward flag visible on accepted point for cor. of secs. 7, 12, 13 and 18, on W. bdy. of sec. 18
40.00	No evidence of the original $\frac{1}{4}$ sec. cor. of secs. 13 and 18 found after diligent search. Continue line and measurement.
82.90	Intersect the accepted point for the cor. of secs. 7, 12, 13 and 18, hereinafter described. True course and distance are therefore N. 3°23'W., 82.90 chs.

	Thence, from cor., N. 0°25'W., on true line, on W. bdys. of secs. 7 and 6, toward flag visible on the reestablished corner of Tps. 14 and 15 N., Rs. 2 and 3 W., searching at regular intervals for original corners without avail, until at
158.01	Intersect the cor. of Tps. 14 and 15 N., Rs. 2 and 3 W., hereinafter described. True course and distance for the boundaries of the respective sections are therefore N. 0°25'W., 79.00 chs.

-Resurvey	
From the corner of Tps. 13 and 14 N., Rs. 2 and 3 W. N. 1°25'E., on true line, on E. bdy. of sec. 36. Over mountainous land, through thick timber and dense undergrowth. Asc. 46 ft. over S. slope.	

Chains	
3.15	Wash, 5 lks. wide, course SE. Continue ascent of 18 ft. over SE. slope.
7.80	Ridge, bears E. and W. Trail on same bears E. and W. Desc. 33 ft. over NW. slope.
16.80	Wash, 10 lks. wide, course NE. Continue over rolling E. slope.
22.80	Wash, 30 lks. wide, course NE.
24.00	Wash, 20 lks. wide, course NE. Asc. 47 ft. over SE. slope.
33.40	Spur, bears NE. Desc. 117 ft. over NE. slope.
38.20	Wash, 10 lks. wide, course NE. Asc. 15 ft. over SE. slope.
40.01	(40.00 chs. in Northing) set an iron post, 3 ft. long, 1 in. in diam., 15 ins. in the ground to bedrock, in a mound of stone to top, for reestablished $\frac{1}{4}$ sec. cor. of sec. 36, with brass cap marked
	$\frac{1}{4}$ S 36 1931 from which an oak, 5 ins. in diam., bears S. 10° W., 15 lks. dist., mkd. $\frac{1}{4}$ S. 36 BT. an oak, 6 ins. in diam., bears S. 27° W., 38 lks. dist., mkd. $\frac{1}{4}$ S 36 BT. Thumb Butte, bears S. 44° W., vertical angle. + 35° Ascend gradual SE. slope.
41.68	(Proportional point) set an iron post, 3 ft. long, 1 in. in diam., 15 ins. in the ground to bedrock, in a mound of stone to top, for the reestablished $\frac{1}{4}$ sec. cor. of sec. 31, with brass cap marked
	$\frac{1}{4}$ S 31 1931 from which an oak, 5 ins. in diam., bears N. 40° E., 43 lks. dist., mkd. $\frac{1}{4}$ S 31 BT. an oak tree, 5 ins. diam., bears S. 37° E., 54 lks. dist., marked $\frac{1}{4}$ S 31 BT. Asc. gradual SE. slope.
42.60	Spur, bears NE. Desc. 65 ft. over NE. slope.
48.45	Wash, 15 lks. wide, course NE. Asc. 20 ft. over SE. slope.
50.30	Spur, bears NE. Desc. 181 ft. over NE. slope to creek.
54.15	Road, bears E. and W.
59.00	Miller Creek, stream of water 10 lks. wide, 4 lks. deep. course NE. Asc. 64 ft. over S. slope.

Chains 65.00	Spur, bears E. Desc. gradually along NE. slope.								
71.80	Wash, 5 lks. wide, course SE. Asc. 83 ft. over SE. slope.								
80.02	(80.00 chs. in Northing) set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in the ground to bedrock, in a mound of stone to top, for the reestablished cor. of secs. 25 and 36, with brass cap marked.								
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black;">T 14 N</td> <td>T 14 N</td> </tr> <tr> <td style="border-right: 1px solid black;">S 25</td> <td>R 2 W</td> </tr> <tr> <td style="border-right: 1px solid black;">S 30</td> <td>S 31</td> </tr> <tr> <td style="border-right: 1px solid black;">R 3 W</td> <td></td> </tr> </table>	T 14 N	T 14 N	S 25	R 2 W	S 30	S 31	R 3 W	
T 14 N	T 14 N								
S 25	R 2 W								
S 30	S 31								
R 3 W									
	1931 from which								
	a yellow pine, 18 ins. in diam., bears N. 47° W., 67 lks. dist., mkd. T 14 N R 3 W S 25 BT								
	a yellow pine, 24 ins. in diam., bears S. 60° W., 148 lks. dist., marked T 14 N R 3 W S 36 BT.								
	Land, mountainous. Soil, rocky 4th rate. Timber, yellow pine, oak and juniper. Undergrowth, oak brush, manzanita and cacti.								

	N. 1° 25' E., on true line, on E. bdy. of sec. 25.								
	Over mountainous land, through thick timber and undergrowth.								
	Asc. 20 ft. over SW. slope.								
3.34	Spur, bears E. Intersect the original corner of secs. 25, 30, 31 and 36, which is a stone, 6 x 8 x 14 ins. above ground, firmly set, marked with 1 and 5 grooves on S. and N. faces, from which a yellow pine, 36 ins. in diam., bears N. 5° W., 22 lks. dist., marked T XIV N R III W S XXV BT								
	Reconstruct this cor. monument and alter its reference as follows: Along side the original corner stone, set an iron post 3 ft. long, 2 ins. in diam., 8 ins. in the ground to bedrock, in a mound of stone to top, for the cor. of secs. 30 and 31, with brass cap marked								
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black;">T 14 N</td> <td>T 14 N</td> </tr> <tr> <td style="border-right: 1px solid black;">R 3 W</td> <td>S 30</td> </tr> <tr> <td style="border-right: 1px solid black;">S 25</td> <td>S 31</td> </tr> <tr> <td style="border-right: 1px solid black;"></td> <td>R 2 W</td> </tr> </table>	T 14 N	T 14 N	R 3 W	S 30	S 25	S 31		R 2 W
T 14 N	T 14 N								
R 3 W	S 30								
S 25	S 31								
	R 2 W								
	1931 from which								
	a yellow pine, 12 ins. in diam., bears S. 28½° E., 148 lks. dist., marked T 14 N R 2 W S 31 BT								
	an oak, 10 ins. in diam., bears N. 36½° E., 91 lks. dist., marked T 14 N R 2 W S 30 BT								
	Thence, with continued measurement, N. 0° 52' W., on true line, on E. bdy. of sec. 25. Desc. gradually over NE. slope.								
5.80	Wash, 30 lks. wide, course SE. Asc. 75 ft. over S. slope.								
13.75	Ridge, bears N. and S. Thence along nearly level land.								

Resurvey of the East Bdy. of T. 14 N., R. 3 W. 17

Chains
25.55

Knoll on ridge; leave ridge which turns NE.; desc. 119 ft. over N. slope.

33.05

Head of wash, 10 lks. wide, course NE. Asc. 57 ft. over SW. slope.

40.00

Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground to bedrock, in a mound of stone to top, for the reestablished $\frac{1}{4}$ sec. cor. of sec. 25, with brass cap marked $\frac{1}{4}$ S 25

1931

from which

a pinon, 8 ins. in diam., bears S. 25° W., 18 lks. dist., marked $\frac{1}{4}$ S 25 BT.an oak, 6 ins. in diam., bears N. 62° W., 10 lks. dist., marked $\frac{1}{4}$ S 25 BT.

42.94

(Proportional point) set an iron post, 3 ft. long, 1 in. in diam., on bedrock above a cross 8 ins. long chiseled in same, in a mound of stone to top, for the reestablished $\frac{1}{4}$ sec. cor. of sec. 30, with brass cap marked $\frac{1}{4}$ S 30

1931

No suitable bearing trees available.

Thence,

Continue line and measurement; asc. gradually over SW. slope.

43.95

Knoll on spur, from SE. Desc. 157 ft. over NW. slope.

51.60

Wash, 5 lks. wide, course NW. Asc. 15 ft. over SW. slope.

54.75

Desc. 30 ft. over NW. slope.

59.30

Wire fence, bears NE. and SW.

60.60

Enter wash, 50 lks. wide, course NE. Continue along same.

64.30

Wash, 5 lks. wide, course NE. Asc. 27 ft. over SE. slope.

75.25

Spur, bears E. Desc. 25 ft. over NE. slope.

77.15

Wash, 10 lks. wide, course NE. Asc. gradual SE. slope.

80.00

Set an iron post, 3 ft. long, 2 ins. in diam., 6 ins. in the ground to bedrock, in a mound of stone to top, for the reestablished cor. of secs. 24 and 25, with brass cap marked

T 14 N	T 14 N
S 24	R 2 W
S 25	S 30
R 3 W	

1931

from which

a juniper, 4 ins. in diam., bears N. 45° W., 70 lks. dist., marked T 14 N R 3 W S 24 BT

a juniper, 4 ins. in diam., bears S 10° W 59 lks. dist., marked T 14 N R 3 W S 25 BT

Chains	Land, mountainous. Soil, rocky 4th rate. Timber, yellow pine, oak and juniper. Undergrowth, oak brush, manzanita and cacti.															

	N. 0° 52' W., on true line, on E. bdy. of sec. 24. Over mountainous land, through thick timber and undergrowth. Continue on slight descent over NE. slope.															
2.54	Intersect the original cor. of secs. 19, 24, 25 and 30, which is a stone 10 x 10 x 10 ins. above ground and mound of stone, along side of which is an iron post 2 ins. in diam., firmly set, projecting 12 ins. above ground with brass cap properly marked and witnessed as described in the official record of the reconstruction of this cor. by Sidney E. Blout, U.S.C.S., under Group 140. Alter this cor. monument to refer to secs. 19 and 30, and A.P 4, Tract 42, by changing markings on brass cap to read:															
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding-right: 10px;">TR 42</td> <td style="padding-right: 10px;">AP4</td> <td style="border-left: 1px solid black; padding-left: 10px;">T 14 N</td> </tr> <tr> <td></td> <td></td> <td style="border-left: 1px solid black; padding-left: 10px;">S 19</td> </tr> <tr> <td></td> <td style="padding-right: 10px;">S 24</td> <td style="border-left: 1px solid black; padding-left: 10px;">S 30</td> </tr> <tr> <td></td> <td></td> <td style="border-left: 1px solid black; padding-left: 10px;">R 2 W</td> </tr> <tr> <td></td> <td></td> <td style="border-left: 1px solid black; padding-left: 10px;">1934</td> </tr> </table>	TR 42	AP4	T 14 N			S 19		S 24	S 30			R 2 W			1934
TR 42	AP4	T 14 N														
		S 19														
	S 24	S 30														
		R 2 W														
		1934														
	Thence, with continued measurement, N. 1° 35' E., on true line, on E. bdy. of sec. 24, and E. bdy. of Tract 42. Desc. 74 ft. over NE. slope.															
4.25	Old road, bears NW. and SE.															
5.34	Wire fence, bears NW. and SE.															
7.34	Telephone line, bears NW. and SE.															
8.60	Santa Fe R.R. track, bears NW. and SE.															
11.00	Wire fence, bears NW. and SE. Leave timber and undergrowth; leave mountainous enter rolling open land.															
17.60	Wash, 15 lks. wide, course NE.															
23.50	Wire fence, bears NW. and SE.															
33.90	Telephone line, bears NW. and SE.															
34.10	Wire fence, bears NW. and SE.															
35.55	Highway, bears N. 60° W. and S. 60° E. (Prescott to Skull Valley).															
37.65	Willow Creek, rocky bottom, 1 ch. wide, stream of water in center of same 10 lks. wide, 4 ins. deep, course NE. Asc. slight E. slope.															
40.02	(40.00 chs. in Northing) set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground to bedrock, in a mound of stone to top, for the reestablished $\frac{1}{4}$ sec. of sec. 24, with brass cap marked															

Chains

 $\frac{1}{4}$ S 24

1931 from which

a juniper, 6 ins. in diam., bears S. 52° W., 75 lks. dist., marked $\frac{1}{4}$ S 24 BT

a juniper, 5 ins. in diam., bears N. $16\frac{1}{2}^{\circ}$ W., 43 lks. dist., marked $\frac{1}{4}$ S 24 BT

Continue line and measurement.

42.62

Intersect the true point for the original $\frac{1}{4}$ sec. cor. of secs. 19 and 24, as determined from fence lines and testimony of adjoining property owners. Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, at intersection of wire fences from west and northeasterly, for the $\frac{1}{4}$ sec. cor. of sec. 19 only. AP No. 4 of Tract No. 40 and A.P. No. 1 of Tract 42, with brass cap marked

TR 40	T 14 N R 2 W
AP 4	$\frac{1}{4}$ S 19
AP 1	
TR 42	

1934

from which

a willow, 20 ins. in diam., bears S. 63° E., 115 lks. dist., marked $\frac{1}{4}$ S 19 BT

a yellow pine, 12 ins. in diam., bears S. $81\frac{1}{2}^{\circ}$ E., 234 lks. dist., marked $\frac{1}{4}$ S 19 BT

House of Minor Bishop, bears S. $43\frac{1}{2}^{\circ}$ W.

Thence,

N. $4^{\circ} 25'$ E., on true line, on E. bdy. of sec. 24 and E. bdy. of Tract 40, continuing measurement.

Asc. gradual SE. slope, entering thick timber and undergrowth, which bears E. and W.

46.20 Spur, bears E. Across level land.

48.40 House of Mrs. Colwell bears N. 67° E., about 5 chs. dist. Desc. 92 ft. over NW. slope.

53.30 Wash, 1 ch. wide, course NE. Asc. 69 ft. over SE. slope.

56.30 Spur, bears NE. Thence over rolling E. slope.

67.20 Spur, bears NE. Desc. 20 ft. over NW. slope.

70.00 Wash, 20 lks. wide, course NE.

80.13 (80.00 chs. in Northing) set an iron post, 3 ft. long, 2 ins. in diam., 22 ins. in the ground to bedrock, in a mound of stone to top, for the reestablished cor. of secs. 13 and 24, with brass cap marked

T 14 N	T 14 N
S 13	R 2 W
S 24	S 19
R 3 W	

1931

from which

Chains

an oak, 5 ins. in diam., bears N. $0^{\circ} 30' W.$, 175 lks. dist., marked T 14 N R 3 W S 13 BT

a juniper, 6 ins. in diam., bears S. $36\frac{1}{4}^{\circ} W.$, 90 lks. dist., marked T 14 N R 3 W S 24 BT

Land, rolling and mountainous.
Soil, rocky 4th rate on slopes; across open land. sandy, gravelly loam, 3rd rate.
Timber, yellow pine, oak, and scattering willows along Willow Creek.
Undergrowth, oak brush, cacti, and other native growth.

N. $4^{\circ} 25' E.$, on true line, on E. bdy. of sec. 13. and line 4-1 of Tract 40.

Over rolling land, through thick timber and undergrowth.

.40 Wash, 30 lks. wide, course SE.

3.00 Wash, 30 lks. wide, course E.

3.15 Intersect the original cor. of secs. 13, 18, 19 and 24, which is a stone 10 x 10 18 ins., firmly set in a mound of stone and earth, marked with 3 grooves on N. and S. faces. The original bearing trees have been obliterated.

Reconstruct this cor. monument and alter its reference as follows:

In place of and with the original cor. along side, set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bedrock; in a mound of stone to top, for cor. of secs. 18 and 19 only, of T. 14 N., R. 2 W., and cor. No. 1 of Tract 40, with brass cap marked

				T 14 N
T 14 N	R 3	W	R 2	W
	S 13		S 18	
	AP 1		S 19	
	TR 40			

1934 from which,

an oak, 8 ins. in diam., bears N. $79^{\circ} E.$, 83 lks. dist., marked T 14 N R 3 W S 18 BT

an oak, 6 ins. in diam., bears S. $65^{\circ} E.$, 106 lks. dist., marked T 14 N R 3 W S 19 BT

Thence, along E. bdy. of sec. 13, and line 4-1 Tract 38.

N. $3^{\circ} 23' W.$, on true line, with continued measurement.

3.75 Wire fence, bears E. and W.

10.75 Spur, bears E. Desc. gradual NE. slope.

22.45 Wash, 20 lks. wide, course SE. Asc. 75 ft. over gradual SE. slope to $\frac{1}{4}$ sec. cor.

31.15 Wash, 10 lks. wide, course E.

40.07 (40.00 chs. in **Northing**) set an iron post 3 ft. long, 1 in. in diam., 25 ins. in the ground for the reestablished $\frac{1}{4}$ sec. cor. of sec. 13, with brass cap marked

Chains

 $\frac{1}{4}$ S 13 |

1931

from which

an oak, 6 ins. in diam., bears N. $6\frac{1}{2}^{\circ}$ W.. 12 lks.
dist., marked $\frac{1}{4}$ S 13 BT

An oak, 6 ins. in diam., bears N. 68° W., 18 lks.
dist., marked $\frac{1}{4}$ S 13 BT.

44.60 Proportional point, set an iron post 3 ft. long, 1 in. in
diam., above cross chiseled in bedrock, 6 ins. long.
in a mound of stone to top, for the reestablished $\frac{1}{4}$
sec. cor. of sec. 18, with brass cap marked

 $\frac{1}{4}$ S 18

1931

No bearing trees available.

Asc. 105 ft. over SE. slope.

48.50 Spur, bears E. and W. Desc. 153 ft. over NW. slope.

58.20 Wash, 30 lks. wide, course E. Asc. 50 ft. over SE. slope.

61.00 Spur, bears E. Wire fence, bears E. and W. Over level
land.

64.60 Wire fence, bears E. and W.

64.90 Road, bears E. and W.

66.20 Ranger Station, bears E. about 1 ch. distant.
Spring bears W. about 150 lks. distant.
Small outhouse on line.

68.25 Wire fence, bears E. and W.
Intersect A.P. 1, Tract 38, hereinafter described.

Asc. gradual SE. slope.

71.45 Spur, bears E. Leave level and slight rolling, enter
mountainous land. Desc. 30 ft. over NE. slope.

78.90 Wash, 30 lks. wide, course SE.

80.14 (80.00 chs. Northing) set an iron post 3 ft. long, 2 ins.
in diam., 6 ins. in the ground to bedrock, deposit a
stone marked with a cross (X) at base of post, in a
mound of stone to top, for the reestablished corner of
secs. 12 and 13, with brass cap marked

T 14 N	T 14 N
S 12	R 2 W
S 13	S 18
R 3 W	

1931

No bearing trees available.

Land, rolling, level, and mountainous.

Soil, rocky 4th rate.

Timber, oak, juniper, and yellow pine.

Undergrowth, oak brush, cacti, and native brush.

Chains	<p>N. 3° 23' W., on true line, on E. bdy. of sec. 12.</p> <p>Over mountainous land, through scattering timber and undergrowth,</p> <p>Desc. 15 ft. over NE. slope.</p> <p>3.50 Wash, 20 lks. wide, course SE. Asc. 30 ft. over SW. slope.</p> <p>5.91 Intersect the location of the original point for the cor. of secs. 7, 12, 13 and 18, which is at the cor. of wire fences from North and East; property owners and Forest Service Representatives agree on this position.</p> <p>Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top for the restored corner of secs. 7 and 18, with brass cap marked</p> <div style="text-align: center;"> <table border="1"> <tr><td>T 14 N</td><td>T 14 N</td></tr> <tr><td>R 3 W</td><td>S 7</td></tr> <tr><td>S 12</td><td>S 18</td></tr> <tr><td></td><td>R 2 W</td></tr> </table> <p>1931</p> </div> <p>No bearing trees available.</p> <p>Thence with continued measurement.</p> <p>N. 0° 25' W., on true line, on E. bdy. of sec. 12.</p> <p>Asc. 208 ft. over SW. slope, along wire fence.</p> <p>24.16 Spur, bears SW. Continue on gradual ascent over SW. slope.</p> <p>33.20 Ridge, bears NW. and SE. Desc. 85 ft. over NW. slope.</p> <p>39.60 Wash, 10 lks. wide; course NE. Asc. gradual SE. slope.</p> <p>40.01 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the reestablished $\frac{1}{4}$ sec. cor. of sec. 12, with brass cap marked</p> <div style="text-align: center;"> <table border="1"> <tr><td>$\frac{1}{4}$ S 12</td></tr> </table> <p>1931</p> </div> <p>No suitable bearing trees available.</p> <p>41.50 Spur, bears NE. Desc. 57 ft. over NW. slope.</p> <p>45.41 (Proportional point) set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the reestablished $\frac{1}{4}$ sec. cor. of sec. 7, with brass cap marked</p> <div style="text-align: center;"> <table border="1"> <tr><td>$\frac{1}{4}$ S 7</td></tr> </table> <p>1931</p> </div> <p>No bearing trees available.</p> <p>Desc. gradually over NW. slope.</p> <p>49.30 Wash, 20 lks. wide, course NE. Asc. 48 ft. over SE.</p>	T 14 N	T 14 N	R 3 W	S 7	S 12	S 18		R 2 W	$\frac{1}{4}$ S 12	$\frac{1}{4}$ S 7
T 14 N	T 14 N										
R 3 W	S 7										
S 12	S 18										
	R 2 W										
$\frac{1}{4}$ S 12											
$\frac{1}{4}$ S 7											

Chains

slope.

51.70 Spur, bears NE. Desc. 54 ft. over NE. slope.

58.26 Wash, 50 lks. wide, course NE. Asc. gradual SE. slope.

61.20 Spur, bears NE. Desc. 57 ft. over NW. slope.

65.17 Proportional point,

Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, and in a mound of stone to top, for cor. No. 4 of Tract 37, with brass cap marked

TR 37	
AP 4	T 14 N
T 14 N	R 2 W
R 3 W	S 7
S 12	

1934

76.86 Center of wash, 2 chs. wide, course NE. Asc. gradual SE. slope.

78.96 Wire fence, bears E. and W.

80.01 (80.00 chs. Northing) set an iron post 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the reestablished cor. of secs. 1 and 12, with brass cap marked

T 14 N	T 14 N
S 1	R 2 W
S 12	S 7
R 3 W	

1931

No bearing trees available.

Land, mountainous.
Soil, rocky 4th rate.
Timber, oak, juniper and yellow pine.
Undergrowth, oak brush and cacti.

N. 0° 25' W., on true line, on E. bdy. of sec. 1 and line 4-1 of Tract 37.

Over mountainous land, through thick timber and undergrowth.

4.91 (Proportional point) set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for the reestablished cor. of secs. 6 and 7, with brass cap marked

T 14 N	T 14 N
R 3 W	S 6
S 1	S 7
	R 2 W

1931

No bearing trees available; raise a mound of stone 4 ft. base, 2½ ft. high, east of cor. 3 ft. distant.

13.38 Wash, 10 lks. wide, course NE.

19.56 Wash, 15 lks. wide, course NE.

Chains													
21.61	Road, bears NW. and SE.												
26.86	Dec. 76 ft. over gradual NW. slope.												
31.91	Wash, 30 lks. wide, course NW.												
36.16	Old fence, bears E. and W.												
40.00	Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in the ground to bedrock, in a mound of stone to top, for the reestablished $\frac{1}{4}$ sec. cor. of sec. 1, with brass cap marked												
	$\frac{1}{4}$ S 1												
	1931												
	from which												
	an oak, 6 ins. in diam., bears S. 28° W., 53 lks. dist., marked $\frac{1}{4}$ S 1 BT												
	an oak, 6 ins. in diam., bears N. 12° W., 90 lks. dist., marked $\frac{1}{4}$ S 6 BT												
43.91	Fence, bears NW(about 60 lks. thence NE.)												
44.41	(Proportional point) set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, in a mound of stone to top, for the reestablished $\frac{1}{4}$ sec. cor. of sec. 6, with brass cap marked												
	$\frac{1}{4}$ S 6												
	1931												
	from which												
	an oak, 6 ins. in diam., bears N. 72 $\frac{1}{2}$ ° E., 38 lks. dist., marked $\frac{1}{4}$ S 6 BT												
	an oak, 6 ins. in diam., bears S. 45 $\frac{3}{4}$ ° E., 130 lks. dist., marked $\frac{1}{4}$ S 6 BT												
45.81	Fence, bears NE. and SW. Thence across cleared land. Leave mountainous enter level land. Leave timber.												
47.00	Enter orchard, bears E. and W.												
51.91	Wash, 30 lks. wide, course NE.												
55.31	Leave cleared land; bears E. and W., enter mountainous land; enter thick timber. Asc. 44 ft. over SW. slope.												
57.40	Fence, bears NE. and SW.												
60.56	Spur, bears SE. Asc. 158 ft. over SE. slope.												
63.16	Fence, bears E. and W.												
64.16	Proportional point												
	Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for cor. No. 1 of Tract 37, with brass cap marked												
	<table border="0"> <tr> <td>T 14 N</td> <td>T 14 N</td> </tr> <tr> <td>R 3 W</td> <td>R 2 W</td> </tr> <tr> <td>S 1</td> <td>S 6</td> </tr> <tr> <td>AP 1</td> <td></td> </tr> <tr> <td>TR 37</td> <td></td> </tr> <tr> <td>1934</td> <td></td> </tr> </table>	T 14 N	T 14 N	R 3 W	R 2 W	S 1	S 6	AP 1		TR 37		1934	
T 14 N	T 14 N												
R 3 W	R 2 W												
S 1	S 6												
AP 1													
TR 37													
1934													
83.91	Intersect the original reconstructed corner of Tps. 14												

Resurvey of the East Bdy. of T. 14 N., R. 3 W.

BOOK 4010
25

Chains

and 15 N., Rs. 2 and 3 W., which is an iron post, 3 ins. in diam., firmly set, projecting 12 ins. above the ground, with brass cap properly marked and witnessed by four properly marked bearing trees, one each NW., NE., SE., and SW. of cor., as completely described in the official record.

Land, mountainous and level.

Soil, rocky 4th rate on slopes; in cultivated area, black, sandy loam, 2nd rate.

Timber, oak, juniper and yellow pine.

Undergrowth, oak brush and cacti.

Survey of the West Bdy. of T. 14 N., R. 3 W.

Under Group 128, S. E. Blout, U. S. C. E., resurveyed the east bdy. of T. 15 N., R. 4 W., establishing cors. with reference to areas in said Tp. only. The south $2\frac{1}{2}$ miles of this bdy. form part of the W. bdy. of T. 14 N., R. 3 W., but due to the fact that no corners were established on this line for reference to said Tp., the entire W. bdy. of the Tp. is technically unsurveyed. The following notes describe a survey of the entire W. bdy. of T. 14 N., R. 3 W., establishing corners with reference to areas east of this line only.

Retracement for Survey

From the SE. cor. of T. 15 N., R. 4 W., hereinafter described.

North, on random line, on E. bdy. of sec. 36. $S\frac{1}{2}$.

40.00 Intersect the $\frac{1}{2}$ sec. cor. of sec. 36, hereinafter described.

Thence, North, on random line, on E. bdy. of sec. 36. $N\frac{1}{2}$.

40.04 Intersect the cor. of secs. 25 and 36, hereinafter described.

Thence, North, on a random line, on E. bdy. of sec. 25.

40.05 Intersect the $\frac{1}{4}$ sec. cor. of sec. 25, hereinafter described.

Thence, North, on random line, on E. bdy. of sec. 25. $N\frac{1}{2}$.

40.14 Intersect the cor. of secs. 24 and 25, hereinafter described.

Thence, North, on a random line, on E. bdy. of sec. 24. $S\frac{1}{2}$.

40.00 Intersect the $\frac{1}{4}$ sec. cor. of sec. 24, hereinafter described.

Survey

From the SE. cor. of T. 15 N., R. 4 W., hereinafter described.

South, on a random line,

285.64 Intersect the SW. cor. of T. 14 N., R. 3 W., hereinbefore described.

Thence,

Chains	North, on true line, on W. bdy. of sec. 31. Over mountainous land, through scattering timber and dense undergrowth. Desc. 24 ft. over NW. slope.
2.50	Wash, 20 lks. wide, course W. Asc. 48 ft. over S. slope.
5.90	Spur, bears SW. Desc. 53 ft. over NW. slope.
14.70	Wash, 10 lks. wide, course SW. Asc. 281 ft. over S. slope.
20.60	Wash, 15 lks. wide, course SW. Asc. 65 ft. over S. slope.
24.25	Spur, bears SW. Along level W. slope.
28.25	Spur, bears W. Desc. 143 ft. over N. slope.
35.43	Wash, 20 lks. wide, course W. Asc. 65 ft. over SW. slope.
38.35	Wire fence, bears E. and W.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top for the $\frac{1}{4}$ sec. cor. of sec. 31. with brass cap marked <div style="text-align: center;"> $\frac{1}{4}$ S 31 1931 </div> No suitable bearing trees available. Asc. 119 ft. over SW. slope.
44.52	Intersect the S. end line(2-3) of the Sure Enough No. 16 surveyed but unpatented lode mining claim, Min. sur. No. 2730, at 1.40 chs. N. $72^{\circ}30'$ W., of cor. No. 3. thereof.
46.60	Ridge, bears E. and W. Desc. 232 ft. over NW. slope.
57.85	Wash, 10 lks. wide, course W. Asc. 85 ft. over SW. slope.
62.75	Small spur, bears E. and W. Desc. gradual NW. slope.
65.30	Wash, 10 lks. wide, course NW. Asc. 39 ft. over SW. slope.
68.28	Intersect the N. end line(1-4) of the Sure Enough No. 16 unpatented mining claim, Min. sur. No. 2730, at 60 lks. S. $72\frac{1}{2}^{\circ}$ E., of cor. No. 1 thereof.
69.05	Small spur, bears W. Desc. 115 ft. over NW. slope.
70.27	Intersect the SE. side line, (1-2) of the Bay Horse Extension unpatented lode mining claim, Min. sur. No. 2730, at 10.20 chs., S. $17^{\circ}30'$ W., of cor. No. 2 thereof.
73.25	Wash, 25 lks. wide, course NW. Asc. 92 ft. over SW. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground, to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the cor. of secs. 30 and 31. with brass cap marked

Chains

T 14 N
S 30
S 31
R 3 W

1931

No suitable bearing trees available.

U.S.L.M. No. 2730, which is a mark on exposed surface rock, and witnessed as described in the official record, bears S. $21\frac{1}{2}^{\circ}$ W., 16.37 chs. distant.

Land, mountainous.

Soil, rocky 4th rate.

Timber, oak, cedar and willow.

Undergrowth, oak brush, manzanita and cacti.

North, on true line, on W. bdy. of sec. 30.

Over mountainous land, through scattering timber and dense undergrowth.

Asc. 18 ft. over SW. slope.

- 2.00 Spur, bears E. and W. Desc. 114 ft. over NW. slope.
- 3.70 Intersect the N. end line of the Bay Horse Extention(2-3) mining claim, Min. Sur. No. 2730, at 4.06 chs. N. 72° 30' W., of cor. No. 2 thereof.
- 9.20 Wash, 15 lks. wide, course SW. Asc. 22 ft. over SW. slope.
- 11.90 Spur, bears E. and W. Desc. 55 ft. over NW. slope.
- 13.65 Wash, 15 lks. wide, course NW. Asc. 15 ft. over SW. slope.
- 16.85 Small spur, bears NW. Desc. 40 ft. over NE. slope.
- 20.05 Wash, 15 lks. wide, course NW. Asc. gradual SW. slope.
- 24.25 Small spur, bears W. Desc. 259 ft. over NW. slope.
- 33.65 Iron Springs Wash, 1 ch. wide, course W. Asc. 111 ft. over SW. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the $\frac{1}{4}$ sec. cor. of sec. 30, with brass cap marked
- | |
|--------------------|
| $\frac{1}{4}$ S 30 |
|--------------------|

 1931 from which
- a juniper, 10 ins. in diam., bears N. 20° E., 18 lks. dist., marked $\frac{1}{4}$ S 30 BT
- No other bearing tree available.
- Asc. gradual SW. slope.
- 48.65 Small spur, bears SW. Desc. 19 ft. over NW. slope.
- 52.55 Wash, 15 lks. wide, course SW. Asc. 26 ft. over SE. slope.

Chains	
53.65	Small spur, bears SW. Asc. 26 ft. over SE. slope.
57.30	Small spur, bears SW. Desc. 25 ft. over NW. slope.
59.80	Wash, 15 lks. wide, course SW. Asc. 25 ft. over SE. slope.
60.70	Small spur, bears SW. Desc. 12 ft. over NW. slope.
61.30	Wash, 15 lks. wide, course SW. Asc. 21 ft. over SE. slope.
62.05	Small spur, bears SW. Desc. gradual NW. slope.
74.60	Wash, 20 lks. wide, course SW. Asc. 23 ft. over SW. slope.
79.45	Spur, bears SW. Desc. 19 ft. over NW. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for the cor. of secs. 19 and 30, with brass cap marked

T 14 N
 S 19
 S 30
 R 3 W
 1931

No suitable bearing trees available. Raise a mound of stone, 4 ft. base, 1½ ft. high, E. of cor. 3 ft. dist.

Land, mountainous.

Soil, rocky 4th rate.

Timber, oak, juniper, willow, ash and yellow pine.

Undergrowth, oak brush, catclaw, manzanita and cacti.

North, on true line, on W. bdy. of sec. 19.

Over mountainous land, through scattering timber and under growth.

Desc. gradual N. slope.

1.00	Wash, 10 lks. wide, course W. Thence over rolling W. slope.
7.27	Wash, 10 lks. wide, course W. Asc. 41 ft. over SE. slope.
15.20	Small spur, bears W. Desc. 10 ft. over NE. slope.
18.35	Wash, 20 lks. wide, course NW. Asc. 29 ft. over SW. slope.
29.55	Wash, 15 lks. wide, course SW. Asc. 32 ft. over SE. slope.
30.05	Old road, on spur, bears W. Desc. gradual NW. slope.
33.55	Wash, 30 lks. wide, course SW. Asc. 32 ft. over SE. slope.
39.30	Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock; deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for witness cor. to ¼ sec. cor. of sec. 19, with brass cap marked

Chains

WC.

1/4 S. 19

1931

No suitable bearing trees available.

- 39.50 Desc. 15 ft. over vertical bank of R.R. cut. which bears NW. and SE.
- 40.00 True point for the 1/4 sec. cor. of sec. 19, falls on track bed of the Santa Fe R.R., established witness cor. as hereinbefore described.
- 40.50 Center of double tracks of R.R., bears NW. and SE.
- 41.00 Telephone line, bears NW. and SE. Asc. 25 ft. over vertical embankment, bears NW. and SE.
- 42.00 East end of section house for employees. Ramsgate section foremans house, bears S. 70° W., about 4 chs. distant.
- Asc. 79 ft. over SE. slope.
- 51.50 Spur, bears E. and W. Desc. 186 ft. over N. slope.
- 56.45 Wash, 40 lks. wide, course SW. Asc. 257 ft. over E. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 3 ins. in the ground, to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the cor. of secs. 18 and 19, with brass cap marked

T 14 N
S 18

S 19
R 3 W
1931

No suitable bearing trees available.

Land, mountainous.
Soil, rocky 4th rate.
Timber, oak and pinon
Undergrowth, oak brush, catclaw and cacti.

- North, on true line, on W. bdy. of sec. 18.
- Asc. 18 ft. over SE. slope.
- 1.30 Spur, bears SW. Asc. 114 ft. over S. slope.
- 5.15 Road, bears E. and W. (Skull Valley-Prescott Highway).
- 10.45 Spur, bears SW. Desc. 195 ft. over NW. slope.
- 27.80 Road, bears NE. and SW. (Skull Valley-Prescott Highway).
- Along rolling W. slope.
- 31.20 Wash, 10 lks. wide, course W.
- 34.10 Wash, 15 lks. Wide, course W.
- 36.10 Wash, 10 lks. wide, course W.

Chains 37.00	Road, bears NW. and SE.								
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the $\frac{1}{4}$ sec. cor. of sec. 18, with brass cap marked <div style="text-align: center;"> <table style="border: none;"> <tr><td style="border-left: 1px solid black; border-right: 1px solid black; padding: 0 5px;"> </td><td style="padding: 0 5px;">$\frac{1}{4}$ S 18</td></tr> <tr><td colspan="2" style="text-align: center; padding: 5px 0;">1931</td></tr> </table> </div> <p>No suitable bearing trees available.</p> <p>Continue over rolling land.</p>		$\frac{1}{4}$ S 18	1931					
	$\frac{1}{4}$ S 18								
1931									
45.64	Intersect the SE. corner of T. 15 N., R. 4 W., which is a 3 in. iron post, with brass cap properly marked and firmly set, projecting 14 ins. above ground, witnessed as described in the official record.								
61.14	Rocky wash, 6 lks. wide, course NW.								
71.04	Telephone line, from Tonto Springs Ranger Station to Prescott, bears E. and W.								
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bedrock, deposit a stone, marked with a cross (X) at base of post, in a mound of stone to top, for cor. of secs. 7 and 18, with brass cap marked <div style="text-align: center;"> <table style="border: none;"> <tr><td style="border-right: 1px solid black; padding: 0 5px;">T 15 N</td><td style="padding: 0 5px;">T 14 N</td></tr> <tr><td style="border-right: 1px solid black; padding: 0 5px;">R 4 W</td><td style="padding: 0 5px;">S 7</td></tr> <tr><td style="border-right: 1px solid black; padding: 0 5px;">S 36</td><td style="border-top: 1px solid black; padding: 0 5px;">S 18</td></tr> <tr><td style="border-right: 1px solid black; padding: 0 5px;"></td><td style="padding: 0 5px;">R 3 W</td></tr> </table> </div> <p style="text-align: center;">1931</p> <p>No suitable bearing trees available.</p> <p>Land, mountainous and rolling. Soil, rocky 4th rate. Timber, cedar, oak and juniper. Undergrowth, oak brush, catclaw and cacti.</p> <hr style="border-top: 1px dashed black;"/> <p>North, on true line, on W. bdy. of sec. 7.</p> <p>Over mountainous land, through scattering timber and undergrowth.</p> <p>Asc. 18 ft. over SW. slope.</p>	T 15 N	T 14 N	R 4 W	S 7	S 36	S 18		R 3 W
T 15 N	T 14 N								
R 4 W	S 7								
S 36	S 18								
	R 3 W								
2.60	Spur, bears SW. Desc. 21 ft. over NW. slope.								
4.55	Wash, 20 lks. wide, course SW. Asc. 21 ft. over SW. slope.								
5.64	Intersect the $\frac{1}{4}$ sec. cor. of sec. 36, T. 15 N., R. 4 W., which is a one inch iron post, with brass cap properly marked, firmly set, projecting 12 ins. above ground, and witnessed as described in the official record.								
14.05	Wash, 20 lks. wide, course SW. Asc. 81 ft. over SW. slope.								
20.10	Telephone line, bears E. and W.								
26.30	Desc. 92 ft. over NE. slope.								
31.60	Wash, 20 lks. wide, course NW. Asc. 81 ft. over SW. slope.								

Chains
40.00

Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the $\frac{1}{4}$ sec. cor. of sec. 7, with brass cap marked

$$\begin{array}{c} | \\ \frac{1}{4} \text{ S } 7 \\ 1931 \end{array}$$

No suitable bearing trees available.

Desc. 49 ft. over NW. slope.

45.68

Intersect the cor. of secs. 25 and 36, T. 15 N., R. 4 W., which is an iron post, 2 ins. in diam., with brass cap properly marked, firmly set and projecting 12 ins. above ground, witnessed as described in the official record. Add T14N R3W S7 to markings on the E. side of brass cap to read

$$\begin{array}{c|c} \text{T } 15 \text{ N} & \text{T } 14 \text{ N} \\ \text{S } 25 & \text{R } 3 \text{ W} \\ \hline \text{S } 36 & \text{S } 7 \\ \text{R } 4 \text{ W} & \end{array}$$

1931

57.65

Spur, bears W. Desc. 89 ft. over NW. slope.

64.10

Wash, 60 lks. wide, course NW. Asc. 113 ft. over SW. slope.

78.20

Spur, bears SW. Desc. 45 ft. over NW. slope.

79.90

Wash, 15 lks. wide, course SW. Asc. gradual SW. slope.

80.00

Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for the cor. of secs. 6 and 7, with brass cap marked

$$\begin{array}{c|c} \text{T } 15 \text{ N} & \text{T } 14 \text{ N} \\ \text{R } 4 \text{ W} & \text{S } 6 \\ \text{S } 25 & \text{S } 7 \\ & \text{R } 3 \text{ W} \end{array}$$

1931

No bearing trees available.

Land, mountainous.

Soil, rocky 4th rate.

Timber, oak, juniper, cedar and pinon.

Undergrowth, oak brush, catclaw, greasewood and cacti.

North, on true line, on W. bdy. of sec. 6.

Over mountainous land, through scattering timber and undergrowth.

Asc. 51 ft. over SW. slope.


2.30

Spur, bears SW. Desc. 75 ft. over NW. slope.

5.73

Intersect the $\frac{1}{4}$ sec. cor. of sec. 25, T. 15 N., R. 4 W., which is an iron post, 1 in. in diam., with brass cap properly marked, firmly set, projecting 12 ins. above ground and witnessed as described in the official rec-


- Chains ord.
- 8.30 Wash, 15 lks. wide, course SW. Asc. 69 ft. over SW. slope.
- 14.10 Old road, bears E. and W.
- 15.60 Spur, bears W. Desc. 36 ft. over NW. slope.
- 17.55 Road, bears E. and W.
- 20.05 Wash, 10 lks. wide, course SW. Asc. 38 ft. over SW. slope.
- 23.30 Spur, bears SW. Desc. 74 ft. over NW. slope.
- 28.15 Wash, 50 lks. wide, course W. Asc. 113 ft. over SE. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for the $\frac{1}{4}$ sec. cor. of sec. 6, with brass cap marked



No bearing trees available; raise a mound of stone, 4 ft. base, 1 1/2 ft. high, E. of cor.

Continue on ascent.

- 45.87 Intersect the cor. of secs. 24 and 25, T. 15 N., R. 4 W., which is an iron post, 2 ins. in diam., with brass cap properly marked, firmly set, projecting 12 ins. above ground, witnessed as described in the official record. To markings on brass cap, add T 14 N R 3 W S 6 on east side of same to read



Desc. gradual NE. slope.

- 46.40 Wash, 25 lks. wide, course NW. Asc. 115 ft. over SE. slope.
- 53.90 Wash, 26 lks. wide, course SW. Asc. 90 ft. over SE. slope.
- 71.40 Spur, bears W. Desc. 141 ft. over NW. slope.

- 84.07 Intersect the closing cor. of Tps. 14 and 15 N., R. 3 W., which is an iron post, 3 ins. in diam., firmly set, projecting 12 ins. above ground, with brass cap properly marked and witnessed as described in the official record.

The $\frac{1}{4}$ sec. cor. on the E. bdy. of sec. 24, T. 15 N., R. 4 W., bears North, 1.80 chs. dist.; an iron post, 1 in. in diam., with brass cap properly marked, firmly set, projecting 12 ins. above ground and witnessed as described in the official record.

Land, mountainous.
Soil, rocky 4th rate.
Timber, oak and juniper.
Undergrowth, oak brush, catclaw and cacti.

Chains	Comprising the following described land, entered under Forestry listing No. 021870 and patented by Lee Wilson: SE $\frac{1}{4}$ NE $\frac{1}{4}$, E $\frac{1}{2}$ SE $\frac{1}{4}$ sec. 1; NE $\frac{1}{4}$ NE $\frac{1}{4}$ sec. 12, T. 14 N., R. 3 W.
	The location of this tract is controlled by the reestablished corners of original secs. 1, 6, 7 and 12, T. 14 N., Rs. 2 and 3 W., which now refer to secs. 6 and 7, T. 14 N., R. 2 W., only. Present claimant, Lon Stringfield, lives on adjoining land, in T. 14 N., R. 2 W.
	From cor. No. 1 of Tract 37, hereinbefore described.
	West, on line 1-2 of tract 37.
20.00	Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, in a mound of stone to top, for Cor. No. 2 of tract 37, with brass cap marked
	T14N R3W S1 AP2 TR 37
	Thence,
	S. 0° 25' E., on line 2-3 of tract 37.
64.10	Intersect sec. line bet. secs. 1 and 12, at 20.00 chs., N. 89° 52' W., of the cor. of secs. 1 and 12, on E. bdy. of Tp.
79.00	Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, and in a mound of stone to top, for cor. No. 3 of tract 37, with brass cap marked
	T14N TR 37 R3W AP3 S12 1934
	Thence,
	East, on line 3-4 of tract 37.
20.00	Cor. No. 4 of tract 37, hereinbefore described.
	Thence,
	N. 0° 25' W., on line 4-1 of tract 37, and E. bdy. of the Tp.
14.84	Intersect the cor. of secs. 1 and 12, T. 14 N., R. 3 W., hereinbefore described.
19.75	Intersect the cor. of secs. 6 and 7, T. 14 N., R. 2 W., hereinbefore described.
59.25	<i>Intersect the $\frac{1}{4}$ Sec. Cor. of Sec. 6, T14N, R2W, hereinbefore described.</i>
79.00	Intersect cor. No. 1 of tract 37, the place of beginning.

Tract 38

Comprising the following described land: SE $\frac{1}{4}$ SE $\frac{1}{4}$ sec. 15, T. 14 N., R. 3 W., patented June 28, 1900, to George W. Augustine.

The location of this tract is based upon two identified original cors. of sec. 15, the $\frac{1}{4}$ sec. cor. bet. secs.

- Chains 15 and 22, and the cor. of secs. 14, 15, 22 and 23.
Claimant unavailable.
- Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, and in a mound of stone to top, for cor. No. 1 of tract 38, with brass cap marked
- T14N R3W S14

AP1
TR 38

1934
- Thence,
N. 85° 50' W., on line 1-2 of tract 38.
- 19.77 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, in a mound of stone to top, for Cor. No. 2 of tract 38, with brass cap marked
- T14N AP2
R3W TR 38
S15
1934
- Thence,
South, on line 2-3 of tract 38.
- 20.00 Midpoint on original line bet. cor. of secs. 14, 15, 22 and 23, and 1 sec. cor. of secs. 15 and 22.
- Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for Cor. No. 3 of tract 38, and Cor. No. 1 of tract 39, with brass cap marked
- S22 AP3 TR 38

AP 1	S22
TR 39	T14N R3W

1934
- Thence,
S. 85° 50' E., on line 3-4 of tract 38.
- 19.77 The original cor. of secs. 14, 15, 22 and 23, a stone, 16 x 10 x 4 ins., firmly set in a mound of stone, marked with three and two grooves on the S. and E. faces, respectively.
- In place of and with the original cor. along side, set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, and in a mound of stone to top, for Cor. No. 4 of tract 38, with brass cap marked
- TR 38 T14N
AP 4 R3W
S23
WP
1934
- North, on line 4-1 of tract 38.
- 20.00 Cor. No. 1 of tract 38, the place of beginning.

Chains

Tract 39

Comprising the following described land, NE $\frac{1}{4}$ NW $\frac{1}{4}$, NW $\frac{1}{4}$ NE $\frac{1}{4}$ sec. 22, T. 14 N., R. 3 W., under S.F.P. and P. sta. grounds, approved January 11, 1897.

The location of this tract is controlled by three identified original corners of section 22, the $\frac{1}{4}$ sec. cor. bet. secs. 15 and 22, the $\frac{1}{4}$ sec. cor. bet. secs. 22 and 23, and the cor. of secs. 14, 15, 22 and 23.

Cor. No. 1 of tract 39 is identical with Cor. No. 3 of tract 38, hereinbefore described in the notes of the survey of tract 38.

Thence,

N. 85° 50' W., on line 1-2 of tract 39.

19.77

The original $\frac{1}{4}$ sec. cor. bet. secs. 15 and 22, which is the rotted remains of a post, in the center of an old mound of stone.

In place of rotted post, with the remains along side, and in the mound, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for Cor. No. 2 of tract 39, with brass cap marked

T14N R3W
S15

AP2

TR 39
1934

from which

Stumps of original bearing trees:

A pine stump, 6 ins. above ground, bears S. 45° E.. 33 lks. dist.

A pine stump, 6 ins. above ground, bears N. 54° W.. 97 lks. dist.

I find pieces of scribed wood at the base of these stumps.

Thence,

West, on line 2-3 of tract 39.

20.00

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for Cor. No. 3 of tract 39, with brass cap marked

T14N
R3W AP3
S15 TR 39
1934

Thence,

South, on line 3-4 of tract 39.

18.75

Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, in a mound of stone to top, for Cor. No. 5 of tract 39, with brass cap marked

T14N TR 39
R3W AP4
S22
1934

Thence,

- Chains East, on line 4-5 of tract 39.
- 20.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for Cor. No. 5 of tract 39, with brass cap marked
- | |
|-------|
| TR 39 |
| AP 5 |

 T14N R3W S22
 1934
- Thence
- S. 85°50'E., on line 5-6 of tract 39.
- 10.25 Intersect the SW. side line, 2-3 of the Last Chance, patented millsite, Min. Sur. No. 1397, at 5.32 chs., S. 35°35'E. of Cor. No. 3, thereof.
- Across patented mineral land.
- 16.69 Intersect the NE. side line 1-4 of the Last Chance Millsite, at 60 lks. dist., N. 35°35'W., of Cor. No. 1, thereof.
- Leave patented land.
- 17.79 Intersect the NW. side line, 1-2 of patented lode claim, Last Chance Sou. Ext., Mineral Sur. No. 1397, at 77 lks., dist., N. 57° 20' E., of Cor. No. 1 of the Last Chance Millsite.
- Across patented land.
- 19.77 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for Cor. No. 6 of tract 39, with brass cap marked

TR 39
AP 6

 LC

1934

Thence,

North, on line 6-1 of tract 39.

- 1.47 Intersect the NW. side line, 2-3 of the Last Chance patented claim, Min. Sur. No. 1397, at 20 lks. dist., N. 55° 39' E., of Cor. No. 3, thereof.
- Leave patented mineral land.
- 18.75 Intersect Cor. No. 1, the place of beginning.

Tract 40

Comprising the following described land: E $\frac{1}{2}$ NE $\frac{1}{4}$ sec. 24, T. 14 N., R. 3 W., patented by Wm. M. Lewis, H.E. 1404, March 3, 1905.

The location of this tract is determined by legal subdivision of original sec. 24, as defined by six original corners, and recovered points for $\frac{1}{4}$ sec. cor. of secs. 13 and 24 and $\frac{1}{4}$ sec. cor. of secs. 24 and 25.

Cor. No. 1 of tract 40, is identical with the cor. of secs.

Survey of Tracts in T. 14 N., R. 3 W.

37

- Chains 18 and 19, T. 14 N., R. 2 W., established as hereinbefore described.
- Thence,
S. 87° 00' W., on line 1-2 of tract 40.
- 20.10 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for Cor. No. 2 of tract 40, with brass cap marked
- | | |
|-------|-----|
| T14N | R3W |
| S | 13 |
| AP2 | |
| TR 40 | |
| 1934 | |
- Thence,
S. 3° 00' W., on line 2-3 of tract 40.
- 39.47 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, and in a mound of stone to top, for witness Cor. No. 3 of tract 40, with brass cap marked.
- | | |
|-------|-------|
| T14N | R3W |
| S24 | TR 40 |
| | AP3 |
| WC | |
| TR 42 | |
| 1934 | |
- 39.59 True point for Cor. No. 3 of tract 40. falls in Prescott-Iron Springs Highway, where it is impractical to establish same.
- Thence,
N. 89° 30' E., on line 3-4 of tract 40.
- 19.03 Intersect Cor. No. 4 of tract 40, and the $\frac{1}{4}$ sec. cor. of sec. 19, T. 14 N., R. 2 W., on E. bdy. of Tp. hereinbefore described.
- Thence,
N. 4° 25' E., on line 4-1 of tract 40 and the E. bdy. of the Tp.
- 37.51 The Cor. of secs. 13 and 24, hereinbefore described.
- 40.66 Cor. No. 1 of tract 40 and the cor. of secs. 18 and 19 of R. 2 W., the place of beginning.

Tract 41

Comprising the following described land: SW $\frac{1}{4}$ sec. 24, T. 14 N., R. 3 W., patented by Wm. Milo, under HE 88, November 20, 1883.

The location of this tract is determined by legal subdivision of sec. 24 as defined by six original corners and recovered points for $\frac{1}{4}$ sec. cor. of sec. 13 and 24 and $\frac{1}{4}$ sec. cor. of sec. 24 and 25.

The NE. cor. of tract 41 being identical with the NW. cor. of tract 42, at center of section, 38.69 chs., S. 1°36' W. of midpoint on N. bdy. of sec., and 40.15 chs. N. 1°

Chains

30' E., of midpoint on S. bdy. of sec. 24, set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for Cor. No. 1 of tract 41, and Cor. No. 2 of tract 42, with brass cap marked

T14N R3W S24	
AP 1	AP 2
TR 41	TR 42

1934

Thence,

S. 89° 30' W., on line 1-2 of tract 41.

39.34

The original $\frac{1}{4}$ sec. cor. of secs. 23 and 24, a stone, 14 x 14 x 14 ins., in a mound of stone, marked $\frac{1}{4}$ on W. face.

In place of and with the original cor. stone along side, set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, and in a mound of stone to top, for Cor. No. 2 of tract 41, with brass cap marked

T14N	
R3W	AP 2
S24	TR 41

1934

Thence,

S. 0° 20' E., on line 2-3 of tract 41

40.30

Intersect the original cor. of secs. 23, 24, 25 and 26, which is a stone, 8 x 12 x 14 ins., marked with two notches on the S. edge, and one notch on the E. edge, and set in a mound of stone.

At point for cor., with cor. stone along side, set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, and in a mound of stone to top, for Cor. No. 3 of tract 41, and Cor. No. 1 of Tract 43, with brass cap marked

T14N R3W	TR 41
S24	AP 3
AP 1	
TR 43	

1934

from which

stump of original bearing tree, at which I find pieces of scribed wood, bears S. 51° 30' E., 47 lks. dist.

Thence,

N. 89° 20' E., on line 3-4 of tract 41.

38.03

Midpoint on S. bdy. of original sec. 24, set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, and in a mound of stone to top, for cor. No. 4 of tract 41, and Cor. No. 3 of tract 42, with brass cap marked

TR 41	TR 42
AP 4	AP 3

T14N R3W
S24
1934

Thence,

Chains N. 1° 36' E., on line 4-1 of tract 41.
 40.15 Intersect Cor. No. 1 of tract 41, and Cor. No. 2 of tract 42, the place of beginning.

Tract 42

Comprising the following described land, patented November 10, 1877, under Pre. 11-27-76, by Guiseppe Lafranchi: SE $\frac{1}{4}$ of sec. 24, T. 14 N., R. 3 W.

The location of this tract is determined by legal subdivision of sec. 24, as defined by six original corners and recovered points for $\frac{1}{4}$ sec. cor. of secs. 13 and 24 and $\frac{1}{4}$ sec. cor. of secs. 24 and 25.

Cor. No. 1 of this tract, is identical with cor. No. 4 of Tract 40, and the $\frac{1}{4}$ sec. cor. of sec. 19, T. 14 N., R. 2 W., as hereinbefore described.

Thence,

S. 89° 30' W., on line 1-2 of tract 42.

19.03 Intersect the true point for Cor. No. 3 of tract 40, the witness cor. for which is hereinbefore described.

38.06 Intersect Cor. No. 2 of Tract 42, identical with Cor. No. 1 of Tract 41, hereinbefore described.

Thence,

S. 1° 36' W., on line 2-3 of tract 42.

40.15 Intersect Cor. No. 3 of tract 42, identical with Cor. No. 4 of tract 41, hereinbefore described.

Thence,

N. 89° 20' E., on line 3-4 of tract 42.

38.03 Intersect Cor. No. 4 of tract 42, identical with the cor. of secs. 19 and 30, T. 14 N., R. 2 W., hereinbefore described.

Thence,

N. 1° 35' E., on line 4-1 of tract 42, and along E. bdy. of the Tp.

40.08 Intersect Cor. No. 1 of tract 42, Cor. No. 4 of tract 40, and the $\frac{1}{4}$ sec. cor. on the W. bdy. of sec. 19, of R. 2 W., the place of beginning.

Tract 43

Comprising the following described land, patented by F.B. Spence, May 14, 1900, under H.E. 912: NE $\frac{1}{4}$ NE $\frac{1}{4}$ of sec. 26, T. 14 N., R. 3 W.

The location of this tract is determined by legal subdivision of sec. 26, as defined by five original corners, point for cor. of secs. 25, 26, 35 and 36 as determined by single proportion between original cor. of secs.

Chains

35 and 36 and the $\frac{1}{4}$ sec. cor. of secs. 25 and 26, and recovered points for $\frac{1}{4}$ sec. cor. of secs. 23 and 26 and $\frac{1}{4}$ sec. cor. of secs. 26 and 35.

Begin at Cor. No. 1, (NE Cor.) identical with Cor. No. 3 of tract 41, hereinbefore described.

Thence,

S. $84^{\circ}28'$ W., on line 1-2 of tract 43.

22.50

Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, in a mound of stone to top, for AP 2 of tract 43, with brass cap marked

T14N R3W S26

AP 2
TR 43

1934

Thence,

S. $2^{\circ}06'$ W., on line 2-3 of tract 43.

25.15

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for Cor. No. 3 of tract 43, with brass cap marked

T14N TR 43
R3W AP 3
S26

1934

Thence,

S. $89^{\circ}00'$ E., on line 3-4 of tract 43.

21.22

Intersect E. bdy. of original sec. 26, at midpoint on N $\frac{1}{2}$ of same. Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, in a mound of stone to top, for Cor. No. 4 of tract 43, with brass cap marked

TR 43 T14N R3W
AP 4 S25

1934

Thence

N. $4^{\circ}32'$ E., on line 4-1 of tract 43.

27.66

Intersect Cor. No. 1 of tract 43, and Cor. No. 3 of tract 41, the place of beginning.

Tract 44

Comprising the following described land, SW $\frac{1}{4}$ sec. 34, T. 14 N., R. 3 W., patented by Wm. J. March, H.E. 183, November 20, 1883.

The location of this tract is based upon two original Cors., found on S. bdy. of sec. 34.

Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, and in a mound of stone to top, for Cor. No. 1 of tract 44, with brass cap marked

Survey of Tracts in T. 14 N., R. 3 W.

41

Chains

T14N R3W S34

AP 1
TR 44

1934

Thence,

N. 89°34' W., on line 1-2 of tract 44.

40.04

Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, in a mound of stone to top, for Cor. No. 2 of tract 44, with brass cap marked

T14N R3W S34

AP 2
TR 44

1934

Thence,

South, on line 2-3 of tract 44.

36.33

Intersect S. bdy. of Tp., at 1.66 chs. dist., E. of the cor. of secs. 33 and 34, hereinbefore described.

40.00

Intersect the original cor. of secs. 3, 4, 33 and 34, which is a stone, 6 x 7 x 18 ins. above ground and mound of stone, marked with three grooves on the east and west faces.

In place of and with the original cor. stone along side, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for Cor. No. 3 of tract 44, with brass cap marked

TR 44
AP 3

T13N R3W S3

1934

from which

A pine stump, 40 ins. in diam., 3 ft. high, bears N. 47° W., 77 lks. dist., marks illegible.

A pine stump, 20 ins. in diam., 4 ft. high, bears S. 34° W., 44 lks. dist., marks illegible.

A pine stump, 18 ins. in diam., 6 ft. high, bears S. 34° E., 36 lks. dist., marks illegible.

Thence

S. 89° 34' E., on line 3-4 of tract 44.

40.04

Intersect the original $\frac{1}{4}$ sec. cor. of secs. 3 and 34, which is a stone, 10 x 10 x 14 ins., loosely set in a mound of stone, marked $\frac{1}{4}$ on N. face.

In place of and with original cor. stone along side; Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, and in a mound of stone to top, for Cor. No. 4 of tract 44, with brass cap marked

TR 44
AP 4

T13N R3W S3

1934

Chains	Thence						
	North, on line 4-1 of tract 44.						
3.99	Intersect the S. bdy. of T. 14 N., R. 3 W., at 1.80 chs. dist., east of the $\frac{1}{4}$ sec. cor. of sec. 34, hereinbefore described.						
40.00	Intersect Cor. No. 1 of tract 44, the place of beginning.						

Tract 45							
Comprising the $S\frac{1}{2}$ of the $SW\frac{1}{4}$ of sec. 26 and $N\frac{1}{2}$ of $NW\frac{1}{4}$, sec. 35, T. 14 N., R. 3 W., patented by Samuel A. Robb, pre. 182, April 15, 1884.							
The location of this tract is determined by legal subdivision of sec. 26 and 35, as defined by eight original cors., and recovered points for cor. of secs. 25, 26, 35 and 36, the $\frac{1}{4}$ sec. cor. of secs. 23 and 26, the $\frac{1}{4}$ sec. cor. of secs. 26 and 35 and the $\frac{1}{4}$ sec. cor. of secs. 35 and 36.							
At the midpoint on the W. bdy. of the $SE\frac{1}{4}$ of original sec. 26, 19.75 chs. dist., S. $0^{\circ} 46'$ E., of the center of the section,							
Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, and in a mound of stone to top, for Cor. No. 1 of tract 45, with brass cap marked.							
<table style="margin: auto;"> <tr> <td colspan="2" style="text-align: center;">T14N R3W S26</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">TR 45</td> <td style="border: 1px solid black; padding: 2px;">AP 1</td> </tr> <tr> <td colspan="2" style="text-align: right;">1934</td> </tr> </table>		T14N R3W S26		TR 45	AP 1	1934	
T14N R3W S26							
TR 45	AP 1						
1934							
	Thence,						
	N. $84^{\circ} 40'$ W., on line 1-2 of tract 45.						
42.72	Midpoint on the W. bdy. of the $SW\frac{1}{4}$ of original section 26, at 22.07 chs. dist., N. $8^{\circ} 04'$ W., of the original cor. of secs. 26, 27, 34 and 35.						
	Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, and in a mound of stone to top, for Cor. No. 2 of tract 45, with brass cap marked						
<table style="margin: auto;"> <tr> <td style="border: 1px solid black; padding: 2px;">T14NR3W</td> <td style="border: 1px solid black; padding: 2px;">TR 45</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">S 27</td> <td style="border: 1px solid black; padding: 2px;">AP 2</td> </tr> <tr> <td colspan="2" style="text-align: right;">1934</td> </tr> </table>		T14NR3W	TR 45	S 27	AP 2	1934	
T14NR3W	TR 45						
S 27	AP 2						
1934							
	Thence,						
	S. $8^{\circ} 04'$ E., on line 2-3 of tract 45.						
21.79	Intersect the NE. side line of the Ellen No. 1 pat. lode mining claim, Min. Sur. No. 2424, at 4.08 chs., N. $61^{\circ} 08'$ W., of Cor. No. 1 thereof.						
	Across patented mineral land.						
22.07	Intersect the original cor. of secs. 26, 27, 34 and 35, which is a stone, 14 x 10 x 10 ins. above ground, firm						

Chains

ly set, marked with one and two grooves on S. and E. faces, respectively.

In place of and with the original cor. along side, set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock, and in a mound of stone to top, for Cor. No. 3 of tract 45, with brass cap marked

WP	
T14NR3W	TR 45
S35	AP 3
1934	

The original bearing trees are gone.

Thence,

S. 0° 21' W., on line 3-4 of tract 45.

8.44

Intersect the SE. end line 1-4 of the Ellen No. 1 mining claim, at 1.45 chs. dist., N. 28° 00' E., of Cor. No. 4 thereof.

Leave patented mineral land.

19.71

Midpoint on the N $\frac{1}{2}$ of the W. bdy. of original sec. 35.

Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, and in a mound of stone to top, for Cor. No. 4 of tract 45, with brass cap marked

T14NR3W	TR 45
S35	AP 4
1934	

Thence,

S. 88° 00' E., on line 4-5 of tract 45.

39.65

Intersect the W. bdy. of the NE $\frac{1}{4}$ of original sec. 35, at midpoint on same, 19.00 chs. dist., N. 0° 05' W., of center of section.

At point for cor., set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, and in a mound of stone to top, for Cor. No. 5 of tract 45, with brass cap marked

TR 45	T14NR3W
AP 5	S35
1934	

Thence

N. 0° 05' W., on line 5-6 of tract 45.

19.00

Midpoint on N. bdy. of original sec. 35.

Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, and in a mound of stone to top, for Cor. No. 6 of tract 45, with brass cap marked

TR 45	T14NR3W
AP 6	S35
1934	

Thence

Chains	N. $0^{\circ} 46'$ W., on line 6-1 of tract 45.
19.75	Cor. No. 1 of tract 45, the place of beginning.

Resurvey of Subdivision Lines of T. 14 N., R. 3 W.	
From the reestablished cor. of secs. 35 and 36. on S. bdy. of Tp., hereinbefore described.	
North, on Sectional Guide Meridian, bet. secs. 35 and 36.	
Over mountainous land, through thick timber and undergrowth.	
Asc. 19 ft. over SW. slope.	
3.30	Spur, bears W. Desc. 108 ft. over NW. slope.
6.90	Wash, 10 lks. wide, course NW. Asc. gradual SW. slope.
9.25	Spur, bears W. Desc. 62 ft. over NW. slope.
15.41	Wash, 10 lks. wide, course NW. Asc. gradual SW. slope.
15.83	Spur, bears E. and W. Desc. 43 ft. over NW. slope.
17.93	Wash, 20 lks. wide, course NW. Asc. 9 ft. over SW. slope.
18.80	Spur, bears W. Desc. 93 ft. over NW. slope.
25.65	Wash, 1 ch. wide, course NE. Asc. 46 ft. over SE. slope.
29.60	Spur, bears W. Desc. 28 ft. over NE. slope.
32.70	Wash, 10 lks. wide, course E. Asc. gradual SE. slope.
32.90	Low spur, bears E. Road, from E., branches NW. and SW.; desc. gradual NE. slope.
35.70	Wash, 10 lks. wide, course SE. Asc. 79 ft. over S. slope.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, in a mound of stone to top, for the reestablished $\frac{1}{4}$ sec. cor. of secs. 35 and 36, with brass cap marked
	$\frac{1}{4}$ S 35 S 36 1931
	from which
	an oak, 6 ins. in diam., bears S. $7\frac{1}{2}^{\circ}$ E., 41 lks. dist., marked $\frac{1}{4}$ S 36 BT
	an oak, 10 ins. in diam., bears S. 66° W., 81 lks. dist., marked $\frac{1}{4}$ S 35 BT
	Asc. 44 ft. over SW. slope.
46.96	Spur, bears SE. Desc. gradual NE. slope.
54.55	Old road, bears E. and W.
57.10	Wash, 14 lks. wide, course NE.
58.85	Same wash, Course NW.
64.30	Wash, 10 lks. wide, course NW. Asc. 49 ft. over SW.

Resurvey of Subdivision Lines of T. 14 N., R. 3 W. 45

Chains	slope.						
68.67	Desc. 33 ft. over gradual NW. slope.						
75.80	Wash, 10 lks. wide, course NW.						
76.90	Wash, 10 lks. wide course NW. Asc. 46 ft. over SW. slope.						
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, in a mound of stone to top, for the reestablished cor. of secs. 25, 26, 35 and 36, with brass cap marked						
	<table border="1" style="margin: auto;"> <tr> <td>T 14 N</td> <td>R 3 W</td> </tr> <tr> <td>S 26</td> <td>S 25</td> </tr> <tr> <td>S 35</td> <td>S 36</td> </tr> </table>	T 14 N	R 3 W	S 26	S 25	S 35	S 36
T 14 N	R 3 W						
S 26	S 25						
S 35	S 36						
	1931 from which						
	an oak, 5 ins. in diam., bears N. 72° E., 15 lks. dist., marked T14N R3W S25 BT						
	an oak, 5 ins. in diam., bears S. 3° E., 23 lks. dist., marked T14N R3W S36 BT						
	a yellow pine, 10 ins. in diam., bears S. 71° W., 46 lks. dist., marked T14N R3W S35 BT						
	a cedar 12 ins. in diam., bears N. 57° W., 97 lks. dist., marked T14N R3W S26 BT.						
	Land, mountainous. Soil, rocky 4th rate. Timber, yellow pine, oak and juniper. Undergrowth, oak brush, manzanita and cacti.						

	Thence,						
	N. 89° 58' E., on random line, bet. secs. 25 and 36.						
40.00	Set temp. 4 sec. cor. of secs. 25 and 36.						
81.76	Fall 5 lks. N. of the cor. of secs. 25 and 36, on E. bdy. of Tp., hereinbefore described.						
	Thence,						
	West, on true line, bet. secs. 25 and 36.						
	Over mountainous land, through thick timber and undergrowth,						
	Desc. 12 ft. over SW. slope.						
3.70	Wash, 20 lks. wide, course S. Asc. 37 ft. over E. slope.						
8.20	Spur, bears S. Desc. 15 ft. over SW. slope.						
12.05	Wash, 10 lks. wide, course SE. Desc. 8 ft. over W. slope.						
13.90	Wire fence, bears N. and S.						
16.65	Wash, 25 lks. wide, course S. Asc. 46 ft. over SE. slope.						
22.10	Spur, bears S. Desc. 29 ft. over SW. slope.						
23.90	Wash, 20 lks. wide, course S. Asc. 86 ft. over SE. slope.						
32.55	Spur, bears S. Fence, bears N. and S. Desc. 65 ft. over						

Chains	SW. slope.
34.90	Wash, 15 lks. wide, course S. Asc. 72 ft. over SE. slope.
41.76	Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground, to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the reestablished $\frac{1}{4}$ sec. cor. of secs. 25 and 36, with brass cap marked
	$\frac{1}{4} \begin{array}{r} \text{S } 25 \\ \hline \text{S } 36 \\ 1931 \end{array}$
	from which
	a juniper 18 ins. in diam., bears S. 4° E., 68 lks. dist., marked $\frac{1}{4}$ S 36 BT
	No other bearing tree available. Thumb Butte, bears S. 30° E. Vertical angle = 10° +.
	Descend gradual SW. slope.
48.14	Head of wash, course SE. Asc. 60 ft. over SE. slope.
50.55	Ridge, bears NE. and SW. Desc. 25 ft. over gradual NW. slope.
57.10	Wash, 15 lks. wide, course NE. Asc. gradual NE. slope.
60.30	Spur, bears S. Desc. 21 ft. over NW. slope.
61.40	Wash, 10 lks. wide, course NE. Over rolling N. slope.
69.50	Wash, 10 lks. wide, course N. Asc. 22 ft. over NE. slope.
75.30	Spur, bears NW. Desc. 8 ft. over SW. slope.
81.76	The cor. of secs. 25, 26, 35 and 36.
	Land, mountainous. Soil, rocky 4th rate. Timber, yellow pine, oak and juniper. Undergrowth, oakbrush, manzanita and cacti.

	North, on Sectional Guide Meridian, bet. secs. 25 and 26.
	Over mountainous land, through thick timber and undergrowth.
	Asc. 89 ft. over S. slope.
5.50	Spur, bears NW. Desc. 210 ft. over N. slope.
22.00	Asc. 40 ft. over S. slope.
26.00	Knoll, on line, about 1 ch. in diam. Across top.
26.43	The original $\frac{1}{4}$ sec. cor. of secs. 25 and 26, which is a stone, 8 x 12 x 14 ins., loosely set in a mound of stone, marked $\frac{1}{4}$ of W. face. No bearing trees.
	Destroy all trace of this cor. monument.
26.60	Leave knoll; desc. 218 ft. over NW. slope.
32.20	Wash, 20 lks. wide, course NW. Over rolling W. slope, along edge of wash.
35.20	Enter Willow Creek, 50 lks. wide, course N. Thence down

Resurvey of the Subdivision lines of T. 14 N., R. 3 W. 47

Chains same. (Willow Creek bends at this point from SW. to N.)

36.90 Leave Willow Creek, course NW. Asc. 30 ft. over SW. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 4 ins. in the ground to bedrock, in a mound of stone to top, for the reestablished $\frac{1}{4}$ sec. cor. of secs. 25 and 26, with brass cap marked

$\frac{1}{4}$
S 26 | S 25

1931 from which

a yellow pine, 14 ins. in diam., bears S. 34° W., 41 lks. dist., marked $\frac{1}{4}$ S 26 BT

an oak, 12 ins. in diam., bears N. $69\frac{1}{2}^{\circ}$ E., 60 lks. dist., marked $\frac{1}{4}$ S 25 BT

Asc. 20 ft. over S. slope.

43.80 Spur, bears W. Desc. 77 ft. over NW. slope.

50.00 East edge of Willow Creek, at bend from SW. to NW.; asc. gradual SW. slope.

53.89 Intersect line 3-4 of tract 43, at 2.10 chs. dist., N. 89° W., of Cor. No. 4, hereinbefore described. Thence across patented land. Desc. 53 ft. over NW. slope.

61.40 Willow Creek, 50 lks. wide, course NE. Asc. 55 ft. over SE. slope.

64.30 Spur, bears NE. Desc. 49 ft. over NE. slope.

70.10 Spence Creek, 30 lks. wide, with small stream of water 10 lks. wide, 2 ins. deep, course E. Asc. 44 ft. over S. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in the ground to bedrock, in a mound of stone to top, for the reestablished cor. of secs. 23, 24, 25 and 26, with brass cap marked

T 14 N R 3 W
S 23 | S 24
S 26 | S 25

1931

from which

a Yellow pine, 14 ins. in diam., bears N. 50° E., 39 lks. dist., marked T 14 N R 3 W S 24 BT

a yellow pine, 12 ins. in diam., bears S. 15° E., 28 lks. dist., marked T14N R3W S25 BT

an oak, 8 ins. in diam., bears S. 71° W., 88 lks. dist., marked T14N R3W S26 BT

a yellow pine, 12 ins. in diam., bears N. 59° W., 68 lks. dist., marked T14N R3W S23 BT

Land, mountainous.

Soil, rocky 4th rate.

Timber, yellow pine, oak and juniper.

Undergrowth, oak brush, manzanita and cacti.

Chains	East, on random line, bet. secs. 24 and 25.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.47	Fall 9 lks. N. of the cor. of secs. 24 and 25, on E. bdy. of Tp., hereinbefore described.
	Thence
	N. $89^{\circ} 56'$ W., on true line, bet. secs. 24 and 25.
	Over mountainous land, through thick timber and undergrowth.
	Asc. 74 ft. over NE. slope.
4.50	Spur, bears N. Desc. 43 ft. over NW. slope.
6.80	Wash, 10 lks. wide, course NW. Asc. 46 ft. over NE. slope.
12.75	Spur, bears N. Desc. 86 ft. over NW. slope.
21.15	Wash, 30 lks. wide, course NW. Over rolling N. slope on ascent of 19 ft.
26.70	Wash, 30 lks. wide, course N. Asc. 33 ft. over NE. slope.
28.85	Spur, bears N. Desc. gradual W. slope.
30.75	Wash, 50 lks. wide, course N. Asc. 40 ft. over NE. slope.
33.05	Fence, bears NE. and SW.
38.35	Spur, bears N. Desc. 37 ft. over NW. slope.
40.47	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for the reestablished $\frac{1}{4}$ sec. cor. of secs. 24 and 25, with brass cap marked
	$\frac{1}{4}$ $\frac{S\ 24}{S\ 25}$
	1931 from which,
	a yellow pine, 10 ins. in diam., bears N. 34° W., 99 lks. dist., marked $\frac{1}{4}$ S 24 BT
	an oak, 8 ins. in diam., bears S. 6° E., 49 lks. dist., marked $\frac{1}{4}$ S 25 BT
	Asc. 80 ft. over NE. slope.
50.80	Spur, bears N., Desc. 123 ft. over NW. slope.
63.20	Road, bears NE. and SW.
65.40	Willow Creek, 10 lks. wide, 3 ins. deep, in canyon bottom, course NE. Asc. 100 ft. over SE. slope.
76.30	Top of ascent, bears NE. and SW. At this point, intersect line 1-4 of tract 43, at 1.43 chs. dist., S. $4^{\circ} 32'$ W. of Cor. No. 1 thereof, hereinbefore described.
	Thence over level ground and across patented land.
80.47	The cor. of secs. 23, 24, 25 and 26.
	Land, mountainous.
	Soil, rocky 4th rate.
	Timber, yellow pine, oak and juniper.

Resurvey of the Subdivision Lines of T. 14 N., R. 3 W. 49

Chains	Undergrowth, oak brush, manzanita and cacti.

	North, on Sectional Guide Meridian, bet. secs. 23 and 24.
	Over level bench land, through thick timber and undergrowth.
1.03	Intersect line 1-2 of Tract 43, at 4.28 chs. dist., S. 84° 28' W. of Cor. No. 1 thereof. Leave patented land.
6.00	Leave bench, bears NE. and SW. Desc. 27 ft. over NE. slope.
9.38	Telephone line, bears N. and SW.
9.88	A.T. & S.F. R.R. tract, bears N. and SW.
22.40	Asc. 13 ft. over SE. slope.
24.60	Spur, bears NE. Desc. 22 ft. over N. slope.
27.50	Wash, 15 lks. wide, course NE. Asc. 33 ft. over SE. slope.
27.80	Road, bears NE. and W.
36.10	Spur, bears NE. Desc. gradual N. slope.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, in a mound of stone to top, for the reestablished $\frac{1}{4}$ sec. cor. of secs. 23 and 24. with brass cap marked
	$\frac{1}{4}$ S 23 S 24 1931 from which
	a yellow pine, 12 ins. in diam., bears S. 65° W., 51 lks. dist., marked $\frac{1}{4}$ S23 BT
	The original $\frac{1}{4}$ sec. cor. of secs. 23 and 24, which is a stone 14 x 14 x 14 ins., loosely set in a mound of stone, marked $\frac{1}{4}$ on W. face, bears N. 67° 26' E., 4.42 chs. dist., reestablished for A.P. 2 of tract 41, as hereinbefore described.
	Desc. gradual N. slope.
41.50	Wash, 10 lks. wide, course NE.
43.40	Wash, 20 lks. wide, course E. Asc. 64 ft. over SE. slope.
47.95	Spur, bears E. Desc. 30 ft. over NE. slope.
57.00	Wash, 20 lks. wide, course SE. Asc. 40 ft. over SE. slope.
62.20	Iron Springs road, bears E. and W.
62.50	Telephone line, bears E. and W.
64.60	Spur, bears E. Desc. 30 ft. over NE. slope.
69.55	Wash, 10 lks. wide, course NE. Desc. 58 ft. over NE. slope.
76.50	Wash, 20 lks. wide, course NE. Asc. 20 ft. over SE. slope.

Chains 80.00	<p>Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for the reestablished cor. of secs. 13, 14, 23 and 24, with brass cap marked</p> <table style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 2px;">T 14 N</td> <td style="padding: 2px;">R 3 W</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">S 14</td> <td style="padding: 2px;">S 13</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">S 23</td> <td style="padding: 2px;">S 24</td> </tr> </table> <p style="text-align: center;">1931</p> <p style="text-align: right;">from which</p> <p>a yellow pine, 8 ins. in diam., bears N. $6\frac{1}{2}^{\circ}$ E., 83 lks. dist., marked T14N R3W S13 BT</p> <p>an oak, 4 ins. in diam., bears S. 35° E., 23 lks. dist., marked T14N R3W S24 BT</p> <p>a juniper, 6 ins. in diam., bears S. $89\frac{1}{4}^{\circ}$ W., 32 lks. dist., marked T14N R3W S23 BT</p> <p>an oak, 4 ins. in diam., bears N. 62° W., 17 lks. dist., marked T14N R3W S14 BT</p> <p>The original cor. of secs. 13, 14, 23 and 24, which is a stone, 16 x 10 x 6 ins., firmly set in a mound of stone, marked with 3 notches on S. face, 1 notch on E. face, bears S. $71^{\circ} 58'$ E., 4.50 chs. dist. Destroy all trace of this cor. monument.</p> <p>Land, mountainous. Soil, rocky 4th rate. Timber, yellow pine, oak and juniper. Undergrowth, oak brush, second growth timber and cacti.</p> <hr style="border-top: 1px dashed black;"/> <p>Thence, S. $89^{\circ} 50'$ E., on random line, bet. secs. 13 and 24.</p> <p>40.00 Set temp. $\frac{1}{4}$ sec. cor.</p> <p>84.32 Fall 5 lks. N. of the reestablished cor. of secs. 13 and 24, on E. bdy. of Tp., hereinbefore described.</p> <p>Thence, N. $89^{\circ} 54'$ W., on true line, bet. secs. 13 and 24.</p> <p>Over mountainous land, through thick timber and undergrowth.</p> <p>Across patented land (Tract 40.). Asc. gradual SE. slope.</p> <p>17.50 Wash, 20 lks. wide, course SE.</p> <p>19.75 Wire fence, bears NE. and SW.</p> <p>19.92 Intersect line 2-3 of tract 40, at 2.07 chs. dist., S. 3° W., of Cor. No. 2 thereof. Leave patented land.</p> <p>21.45 Same wash, as above noted; course E. Continue up same on slight ascent.</p> <p>23.62 Telephone line, bears N. and S.</p> <p>27.02 Same wash, from NW., leave same, asc. 70 ft. over NE. slope.</p> <p>35.65 Spur, bears SE. Desc. 35 ft. over SW. slope.</p> <p>42.20 Wash, 20 lks. wide, course SE. Asc. slight E. slope.</p>	T 14 N	R 3 W	S 14	S 13	S 23	S 24
T 14 N	R 3 W						
S 14	S 13						
S 23	S 24						

Chains 44.32	<p>Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, in a mound of stone to top, for the reestablished $\frac{1}{4}$ sec. cor. of secs. 13 and 24, with brass cap marked</p> <p style="text-align: center;">$\frac{1}{4}$ <u>S 13</u> S 24</p> <p style="text-align: center;">1931 from which</p> <p>an oak, 6 ins. in diam., bears S. $35\frac{1}{2}^{\circ}$ E., 60 lks. dist., marked $\frac{1}{4}$ S24 BT</p> <p>a yellow pine, 12 ins. in diam., bears N. 54° W., 17 lks. dist., marked $\frac{1}{4}$ S13 BT</p> <p>Ascend 32 ft. over SE. slope.</p>
48.20	Spur, bears SE. Desc. 44 ft. over SW. slope.
53.05	Wash, 20 lks. wide, course SE. Asc. 44 ft. over E. slope.
57.40	Old road, bears NW. and SE.
58.20	Spur, bears SE. Desc. 35 ft. over SW. slope.
66.10	Wash, 20 lks. wide, course SE. Asc. 24 ft. over SE. slope.
70.15	Spur, bears S. Desc. 22 ft. over SW. slope.
73.25	Wash, 25 lks. wide, course SE. Asc. 47 ft. over NE. slope.
74.30	Wash, 20 lks. wide, course SE. Asc. gradual E. slope.
81.85	Road, bears NW. and SE.
84.32	Intersect the cor. of secs. 13, 14, 23 and 24.
	<p>Land, mountainous. Soil, rocky 4th rate. Timber, yellow pine, oak and juniper. Undergrowth, oak brush, cacti and second growth timber.</p> <hr style="border-top: 1px dashed black;"/> <p>North, on Sectional Guide Meridian, bet. secs. 13 and 14. Over mountainous land, through thick timber and undergrowth. Desc. 23 ft. over NE. slope.</p>
5.60	Road, bears NW. and SE.
7.70	Wash, 25 lks. wide, course SE. Asc. 78 ft. over S. slope.
16.80	Wash, 20 lks. wide, course SE. Asc. 107 ft. over SE. slope.
29.40	Spur, bears E. Desc. 60 ft. over NE. slope.
33.55	Road, bears NW. and SE.
34.10	Wash, 20 lks. wide, course SE. Asc. 75 ft. over SE. slope.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top.

Chains	for the reestablished $\frac{1}{4}$ sec. cor. of secs. 13 and 14. with brass cap marked
	$\begin{array}{c} \frac{1}{4} \\ \text{S 14} \mid \text{S 13} \\ 1931 \end{array}$
	No suitable bearing trees available.
	Continue ascent of 36 ft. over SE. slope.
45.75	Wash, 15 lks. wide, course SE. Asc. 191 ft. over S. slope.
64.25	Small spur, bears W. Desc. 30 ft. over NW. slope.
67.10	Wash, 20 lks. wide, course SW. Asc. 143 ft. over SW. slope.
74.30	Ridge, bears E. and W. Desc. 91 ft. over NW. slope.
75.90	Trail, bears NE. and SW.
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 25 ins. in the ground, for the reestablished cor. of secs. 11, 12, 13 and 14, with brass cap marked
	$\begin{array}{c} \text{T 14 N} \mid \text{R 3 W} \\ \text{S 11} \mid \text{S 12} \\ \hline \text{S 14} \mid \text{S 13} \\ 1931 \end{array}$
	from which
	a juniper, 16 ins. in diam., bears N. 37° E., 147 lks. dist., marked T14N R3W S12 BT
	a juniper 36 ins. in diam., bears S. 80° E., 74 lks. dist., marked T14N R3W S13 BT
	a juniper, 36 ins. in diam., bears S. 7 $\frac{1}{2}$ ° W., 325 lks. dist., marked T14N R3W S14 BT
	No other bearing trees available; raise a mound of stone, 4 ft. base, 2 ft. high, W. of cor. 3 ft. dist.
	Land, mountainous. Soil, rocky 4th rate. Timber, yellow pine, oak and juniper. Undergrowth, oak brush, cacti and second growth timber.

	Thence,
	S. 89° 54' E., on random line, bet. secs. 12 and 13.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.16	Fall 2 lks. N. of the reestablished cor. of secs. 12 and 13, on E. bdy. of Tp., hereinbefore described.
	Thence,
	N. 89° 53' W., on true line, bet. secs. 12 and 13.
	Asc. 10 ft. over SE. slope.
2.20	Small spur, bears SE. Desc. 13 ft. over SW. slope.
4.30	Wash, 20 lks. wide, course SE. Asc. 48 ft. over NE. slope.

Chains	
8.55	Old road, bears NW. and SE.
12.30	Wash, 20 lks. wide, course NE. Asc. 252 ft. over NE. slope.
35.15	Spur, bears SE.
40.16	Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, in a mound of stone to top, for the reestablished $\frac{1}{4}$ sec. cor. of secs. 12 and 13, with brass cap marked
	$\frac{1}{4}$ $\frac{S\ 12}{S\ 13}$
	1931 from which,
	a juniper, 48 ins. in diam., bears N. 57° W., 534 lks. dist., marked $\frac{1}{4}$ S 12 BT
	a juniper, 26 ins. in diam., bears S. 87° W., 104 lks. dist., marked $\frac{1}{4}$ S 13 BT
	Asc. 97 ft. over gradual E. slope.
64.90	Ridge, bears NE. and SW. Across level top.
80.16	The cor. of secs. 11, 12, 13 and 14.
	Land, mountainous. Soil, rocky 4th rate. Timber, yellow pine, oak and juniper. Undergrowth, oak brush, cacti and second growth timber.

	North, on Sectional Guide Meridian, bet. secs. 11 and 12.
	Over mountainous land, through thick timber and undergrowth. Desc. gradually over bench.
5.00	Leave bench, bears NE. and SW. Desc. 261 ft. over NW. slope.
29.65	Wash, 25 lks. wide, course NE. Over level land.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, in a mound of stone to top, for the reestablished $\frac{1}{4}$ sec. cor. of secs. 11 and 12, with brass cap marked
	$\frac{1}{4}$
	S 11 S 12
	1931 from which
	a yellow pine, 16 ins. in diam., bears S. 81° E., 60 lks. dist., marked $\frac{1}{4}$ S 12 BT.
	an oak, 8 ins. in diam., bears N. 9 $\frac{1}{2}$ ° W., 5 lks. dist., marked $\frac{1}{4}$ S 11 BT
45.20	Wash, 20 lks. wide, course NW.
50.70	Wash, 10 lks. wide, course NW.
51.30	Road, bears NW. and SE. Leave level, enter mountainous land, bears NW. and SE. Asc. 80 ft. over SW. slope.

Chains
75.00 Desc. gradually over NW. slope, and over granite ledges.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, in a mound of stone to top, for the reestablished cor. of secs. 1, 2, 11 and 12, with brass cap marked

T. 14 N	R. 3 W
S 2	S 1
S 11	S 12

1931

from which

a yellow pine, 16 ins. in diam., bears N. 63° E., 118 lks. dist., marked T14N R3W S1 BT

a yellow pine, 10 ins. in diam., bears S. 6½° E., 150 lks. dist., marked T14N R3W S12 BT.

an oak, 18 ins. in diam., bears S. 75° W., 88 lks. dist., marked T14N R3W S11 BT

an oak, 5 ins. in diam., bears N. 72° W., 23 lks. dist., marked T14N R3W S2 BT

Land, mountainous.
Soil, rocky 4th rate.
Timber, yellow pine, oak and juniper.
Undergrowth, oak brush, cacti and second growth timber.

Thence,
S. 89° 53' E., on random line, bet. secs. 1 and 12.

40.00 Set temp. ¼ sec. cor.

79.15 Fall 2 lks. N. of the reestablished cor. of secs. 1 and 12, on E. bdy. of Tp., hereinbefore described.

Thence,
N. 89° 52' W., on true line, bet. secs. 1 and 12.

Over mountainous land, through thick timber and undergrowth. Across patented land (Tract 37). Asc. 10 ft. over NE. slope.

7.20 Wire fence, bears NW. and SE.

16.95 Wash, 50 lks. wide, course N. Asc. 118 ft. over gradual NE. slope to spur.

20.00 Intersect line 2-3 of tract 37, at 14.90 chs. dist., N. 0° 25' W., of Cor. No. 3 thereof, hereinbefore described.

Leave patented land.


38.65 Rocky spur, bears NE. Desc. 19 ft. over NW. slope.

39.15 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for the reestablished ¼ sec. cor. of secs. 1 and 12, with brass cap marked

¼	S 1
	S 12

1931 from which

Chains	<p>an oak, 8 ins. in diam., bears N. 66° E., 19 lks. dist., marked $\frac{1}{4}$ S1 BT</p> <p>an oak, 8 ins. in diam., bears S. 47° E., 8 lks. dist., marked $\frac{1}{4}$ S12 BT</p> <p>Desc. 19 ft. over NW. slope.</p>
49.66	Wash, 26 lks. wide, course NE. Asc. 103 ft. over NE. slope.
61.90	Spur, bears NE. desc. 67 ft. over NW. slope.
67.90	Wash, 20 lks. wide, course NE. Asc. 35 ft. over NE. slope.
72.15	Wood road, bears N. and S.
79.00	Wash, 10 lks. wide, course NE. Asc. slight SE. slope.
79.15	The cor. of secs. 1, 2, 11 and 12.
	<p>Land, mountainous. Soil, rocky 4th rate. Timber, yellow pine, oak and juniper. Undergrowth, oak brush, cacti and manzanita.</p>

	<p>North, on Sectional Guide Meridian, bet. secs. 1 and 2.</p> <p>Over mountainous land, through thick timber and undergrowth.</p> <p>Over rolling broken land.</p>
11.25	Old road, bears NE. and SW.
15.00	Road, bears NE. and SW.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock, in a mound of stone to top, for the reestablished $\frac{1}{4}$ sec. cor. of secs. 1 and 2, with brass cap marked
	$\frac{1}{4}$  1931
	<p>from which</p> <p>a pinon, 20 ins. in diam., bears N. 82° E., 56 lks. dist., marked $\frac{1}{4}$ S1 BT</p> <p>a pinon, 16 ins. in diam., bears S. 33° W., 26 lks. dist., marked $\frac{1}{4}$ S2 BT</p> <p>Desc. 46 ft. over N. slope.</p>
49.75	Wash, 20 lks. wide, course NE. Continue descent of 142 ft. over N. slope.
71.55	Wash, 20 lks. wide, course NW. Desc. 99 ft. over N. slope.
83.79	Intersect the S. bdy. of T. 15 N., R. 3 W., at 1.54 chs. dist., East, of the cor. of secs. 35 and 36, which is an iron post, 2 ins. in diam., firmly set, with brass cap marked and witnessed as described in the official record.
	The true point for the closing cor. of secs. 1 and 2,

Chains falls in center of large wash, 50 lks. wide, course NE., where it is impracticable to monument the corner, therefore at a point 50 lks. W., establish witness cor. as follows:

Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for witness closing cor. of secs. 1 and 2, T. 14 N., R. 3 W., with brass cap marked

T 15 N	R 3 W	
S 36		
-----		WC
S 2	S 1	
T 14 N	R 3 W	
CC		
1931		

from which

a willow, 14 ins. in diam., bears S. 34° E., 160 lks. dist., marked T14N R3W S1 WC CC BT

a willow, 18 ins. in diam., bears S. 66° W., 45 lks. dist., marked T14N R3W S2 WC CC BT

Land, mountainous.

Soil, rocky 4th rate.

Timber, yellow pine, oak, juniper and pinon.

Undergrowth, oak brush, manzanita, cacti and second growth timber.

From the reestablished cor. of secs. 34 and 35, on S. bdy. of Tp., hereinbefore described.

N. 0° 01' W., on true line, bet. secs. 34 and 35.

Over mountainous land, through thick timber and undergrowth.

Asc. 12 ft. over gradual SE. slope.

- 1.10 Road, bears E. and W.
- 4.50 Head of wash, course E. Continue slight ascent.
- 6.30 Ridge, bears E. and W. Desc. 25 ft. over NE. slope.
- 7.30 Head of draw, course E.
- 9.30 Leave ridge, desc. gradual NW. slope.
- 11.30 Head of draw, course NW. Asc. gradual SW. slope.
- 17.75 Same ridge, bears NW. Desc. 253 ft. over NE. slope.
- 28.30 Road, bears E. and W. Desc. 77 ft. over NW. slope.
- 34.20 Wash, 10 lks. wide, course NE. Continue descent of 26 ft. over NW. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock, in a mound of stone to top, for the reestablished $\frac{1}{4}$ sec. cor. of secs. 34 and 35, with brass cap marked

$\frac{1}{4}$	
S 34	S 35

1931	

from which

a yellow pine, 6 ins. in diam., bears S. 68° E., 17 lks. dist., marked $\frac{1}{4}$ S35 BT

BOOK 4010

Resurvey of the Subdivision Lines of T. 14 N., R. 3 W. 57

- Chains a yellow pine, 12 ins. in diam., bears S. 80° W., 38 lks. dist., marked $\frac{1}{4}$ S34 BT
- The original $\frac{1}{4}$ sec. cor. of secs. 34 and 35, a stone 14 x 10 x 10 ins. above ground, firmly set, marked $\frac{1}{4}$ on W. face, and witnessed as described in the official record, bears S. 12° 00' E., 5.09 chs. dist. I destroy all trace of this cor. monument.
- Desc. 69 ft. over NW. slope.
- 43.25 Wash, 60 lks. wide, course NE. Asc. 52 ft. over SE. slope.
- 46.90 Old road, bears NE. and SW.
- 53.10 Spur, bears E. Desc. 26 ft. over NE. slope.
- 55.35 Wash, 10 lks. wide, course E. Asc. 28 ft. over S. slope.
- 57.40 Spur, bears E. Desc. 33 ft. over gradual NE. slope.
- 62.05 Wash, 15 lks. wide, course NE. Asc. 42 ft. over S. slope.
- 64.86 Intersect the SW. side line(3-4) of the Ellen No. 1 pat. lode mining claim, M. S. No. 2424, at 53 lks. dist., N. 62° 20' W., of Cor. No. 4 thereof. Across patented land.
- 66.25 Spur, bears NE. Desc. 47 ft. over N. slope.
- 69.05 Wash, 15 lks. wide, course E. Asc. 52 ft. over SE. slope.
- 75.25 Intersect the NE. side line (1-2), of the Ellen No. 1 pat. lode mining claim, at 5.41 chs. dist., N. 61° 08' W., of cor. No. 1 thereof. Leave patented mineral land.
- 77.40 Spur, bears NE. Desc. 44 ft. over NE. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for the reestablished cor. of secs. 26, 27, 34 and 35, with brass cap marked

T 14 N	R 3 W
S 27	S 26
S 34	S 35

1931

from which

a yellow pine, 12 ins. in diam., bears N. 42° E., 14 lks. dist., marked T14N R3W S26 BT

a yellow pine, 14 ins. in diam., bears S. 32° E., 30 lks. dist., marked T14N R3W S35 BT

a yellow pine, 12 ins. in diam., bears S. 70° W., 31 lks. dist., marked T14N R3W S34 BT

a yellow pine, 12 ins. in diam., bears N. 29° W., 16 lks. dist., marked T14N R3W S27 BT

Land, mountainous.

Soil, rocky 4th rate.

Timber, yellow pine, oak and juniper.

Undergrowth, oak brush, manzanita and cacti.

Thence,

Chains	N. 89° 58' E., on random line, bet. secs. 26 and 35.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.00	Fall 14 lks. S. of the cor. of secs. 25, 26, 35 and 36. Thence
	S. 89° 52' W., on true line, bet. secs. 26 and 35. Over mountainous land, through thick timber and under- growth, Desc. 178 ft. over W. slope.
10.80	Wash, 10 lks. wide, course N. Asc. 82 ft. over NE. slope.
15.85	Spur, bears NW. Desc. 83 ft. over W. slope.
22.60	Wash, 20 lks. wide, course N. Asc. 99 ft. over NE. slope.
33.00	Spur, bears NW. Desc. 66 ft. over NW. slope.
39.16	Intersect line 1-6 of tract 45, at 7.73 chs. dist., N. 0° 46' W., of cor. No. 6 thereof. Across patented land.
39.20	Willow Creek, 10 lks. wide, 4 ins. deep, course N., in bottom of rocky wash, 50 lks. wide. Asc. 15 ft. over E. slope.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, in a mound of stone to top, for the reestablished $\frac{1}{4}$ sec. cor. of secs. 26 and 35, with brass cap marked
	$\frac{1}{4}$ $\frac{S\ 26}{S\ 35}$
	1931 from which
	an oak, 14 ins. in diam., bears N. 11° W., 25 lks. dist., marked $\frac{1}{4}$ S26 BT
	a yellow pine, 6 ins. in diam., bears S. 9° W., 53 lks. dist., marked $\frac{1}{4}$ S35 BT
44.60	Road, bears N. and S.
51.26	Spur, bears NW. Asc. 21 ft. over E. slope.
52.00	Mine shaft, bears SE. about 50 lks. dist.
60.45	Road, bears N. and S.
60.90	Frame of house, bears N. 20 lks. dist.; Desc. gradual W. slope.
62.30	Wash, 20 lks. wide, course SE. Asc. gradual NE. slope.
69.80	Old road, bears NW. and SE., on spur, bears SE. Desc. gradual SW. slope.
74.10	Wash, 20 lks. wide, course SE. Asc. 34 ft. over NE. slope.
79.60	Intersect line 2-3 of tract 45, 16.34 chs. dist., S. 80° 04' E., of Cor. No. 2 thereof.
79.70	Spur, bears N. Desc. slight W. slope.
80.00	The cor. of secs. 26, 27, 34 and 35. Land, mountainous. Soil, rocky 4th rate. Timber, yellow pine, oak and juniper.

Resurvey of the Subdivision Lines of T. 14 N., R. 3 W. 59


Chains	Undergrowth, oak brush, manzanita and cacti.

	N. 0° 01' W., on true line, bet. secs. 26 and 27.
	Over mountainous land, through thick timber and undergrowth.
	Desc. 20 ft. over NE. slope.
1.70	Wash, 25 lks. wide, course E. Asc. 120 ft. over SE. slope.
2.84	Intersect line 2-3 of tract 45, at 13.47 chs. dist., S. 8° 04' E., from Cor. No. 2 thereof.
3.90	Road, bears SE. and W.
15.90	Wash, 15 lks. wide, course SE.
16.00	Intersect line 1-2 of tract 45, at 1.90 chs. dist., S. 84° 40' E., from Cor. No. 2 thereof.
25.00	Ridge, bears E. and W. Desc. 72 ft. over N. slope.
34.00	Wash, 10 lks. wide, course NE. Asc. 10 ft. over SE. slope.
37.60	Spur, bears NE. Desc. slight NW. slope.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, in a mound of stone to top, for the reestablished $\frac{1}{4}$ sec. cor. of secs. 26 and 27, with brass cap marked
	$\frac{1}{4}$ S 27 S 26 1931 from which an oak, 12 ins. in diam., bears N: 66° W., 79 lks. dist., marked $\frac{1}{4}$ S27 BT a yellow pine, 18 ins. in diam., bears S. 53° E., 39 lks. dist., marked $\frac{1}{4}$ S26 BT The original $\frac{1}{4}$ sec. cor. of secs. 26 and 27, which is a stone, 24 x 10 x 10 ins., firmly set, marked $\frac{1}{4}$ on W. face, and witnessed as described in the official record, bears S. 66° W., 5.28 chs. dist. I destroy all trace of this cor. monument. Asc. 10 ft. over SE. slope.
44.70	Spur, bears NE. Desc. 79 ft. over NW. slope.
51.80	Wash, 25 lks. wide, course NE. Asc. 37 ft. over SE. slope.
55.05	Spur, bears NE. Desc. 37 ft. over NW. slope.
58.50	Wash, 10 lks. wide, course NE. Asc. slight SE. slope.
60.40	Wash, 5 lks. wide, course E.
61.90	Spur, bears NE. Desc. gradual NE. slope.
66.75	Wash, 10 lks. wide, course E. Asc. 20 ft. over S. slope.
73.60	Spur, bears NE. Desc. 32 ft. over N. slope.

Chains							
79.15	Wash, 20 lks. wide, course NE. Asc. gradual SE. slope.						
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for the reestablished cor. of secs. 22, 23, 26 and 27, with brass cap marked						
	<table border="1" style="margin: auto;"> <tr> <td>T 14 N</td> <td>R 3 W</td> </tr> <tr> <td>S 22</td> <td>S 23</td> </tr> <tr> <td>S 27</td> <td>S 26</td> </tr> </table>	T 14 N	R 3 W	S 22	S 23	S 27	S 26
T 14 N	R 3 W						
S 22	S 23						
S 27	S 26						
	1931 from which						
	a yellow pine, 12 ins. in diam., bears N. 82° E., 69 lks. dist., marked T14N R3W S23 BT						
	a yellow pine, 8 ins. in diam., bears S. 79° W., 46 lks. dist., marked T14N R3W S27 BT						
	a yellow pine, 14 ins. in diam., bears S. 17° E., 55 lks. dist., marked T14N R3W S26 BT						
	a yellow pine, 10 ins. in diam., bears N. 47½° W., 52 lks. dist., marked T14N R3W S22 BT						
	The original cor. of secs. 22, 23, 26 and 27, which is a stone, 18 x 8 x 8 ins., firmly set, marked with two grooves on S., and two grooves on E. face, and witnessed as described in the official record, bears S. 37° W., 8.67 chs. dist. Destroy all trace of this cor. monument.						
	Land, mountainous. Soil, rocky 4th rate. Timber, yellow pine, oak and cacti.						
	N. 89° 52' E., on random line, bet. secs. 23 and 26.						
40.00	Set temp. ¼ sec. cor.						
79.86	Fall 5 lks. S. of the cor. of secs. 23, 24, 25 and 26. Thence, S. 89° 50' W., on true line, bet. secs. 23 and 26. Over mountainous land, through thick timber and undergrowth, Across patented land. Asc. 21 ft. over SE. slope.						
3.00	Spur, bears SW. Desc. 35 ft. over SW. slope.						
7.35	Telephone line, bears NE. and SW.						
7.45	Santa Fe R. R. track, bears NE. and SW.						
8.15	Old road, bears NE. and SW. Asc. 36 ft. over SE. slope.						
11.11	Intersect line 1-2 of tract 43, at 7.04 chs. dist., N. 84° 28' E., of Cor. No. 2 thereof. Leave patented land.						
13.30	Spur, bears S. Desc. 26 ft. over SW. slope.						
15.60	Wash, 5 lks. wide, course SW. Asc. 8 ft. over SE. slope.						
17.00	Small spur, bears SW. Desc. 20 ft. over W. slope.						
18.85	Wash, 10 lks. wide, course SE. Asc. 33 ft. over SE.						

Resurvey of the Subdivision Lines of T. 14 N., R. 3 W. 61

Chains	slope.
21.75	Road, bears SE. (About 60 chs., NW., this road forks to west and north).
38.00	House of Settler James, on line. About 5 acres of cultivated land, lies south of this place, about 3 chs., extending along Spence Creek. Desc. gradually over SW. slope.
39.30	Road, bears NW. and SE.
39.93	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for the reestablished $\frac{1}{4}$ sec. cor. of secs. 23 and 26, with brass cap marked
	$\frac{1}{4}$ <u>S 23</u> S 26. 1931
40.60	Fence, bears NW. and SE., along edge of Spence Creek Wash.
41.20	Wash, 60 lks. wide, course SE. Asc. 60 ft. over NE. slope of Spence Creek.
44.35	Wire fence, bears NW. and SE.
46.30	Asc. 17 ft. over SE. slope.
49.30	Spur, bears NE. Desc. 25 ft. over N. slope.
53.65	Wash, 20 lks. wide, course NE.
54.25	Asc. 41 ft. over SE. slope.
57.80	Road, bears NE. and SW.
61.15	Wash, 10 lks. wide, course SE. Asc. 104 ft. over NE. slope.
62.45	Road, bears NW. and S.
72.05	Telephone line, bears N. and S.
72.55	Santa Fe R.R. track, bears N. and S. (in cut 20 ft. deep).
74.80	Desc. 40 ft. over NW. slope.
79.55	Wash, 20 lks. wide, course NE. Asc. 6 ft. over SE. slope.
79.86	Intersect the cor. of secs. 22, 23, 26 and 27.
	Land, mountainous. Soil, rocky 4th rate. Timber, yellow pine, oak and juniper. Undergrowth, oak brush, manzanita and cacti.
	N. 0° 01' W., on true line, bet. secs. 22 and 23.
	Over mountainous land, through thick timber and undergrowth.
	Asc. 31 ft. over SE. slope.
1.80	Wash, 10 lks. wide, course E.
6.10	Spur, bears NE. Desc. 9 ft. over NE. slope.

Chains	
8.35	Santa Fe R.R. track, bears NW. and SE.
9.25	Telephone line, bears NW. and SE.
11.05	Spur, bears NE. Desc. 58 ft. over N. slope.
16.50	Wash, 30 lks. wide, course SE. Asc. 216 ft. over SE. slope.
23.10	Telephone line, bears NE. and SW.
23.70	Santa Fe R.R. track, bears NE. and SW.
31.25	Spur, bears NE. Desc. 41 ft. over NE. slope.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, in a mound of stone to top, for the reestablished $\frac{1}{4}$ sec. cor. of secs. 22 and 23, with brass cap marked
	
	from which
	a juniper, 5 ins. in diam., bears S. 41° E., 86 lks. dist., marked $\frac{1}{4}$ S23 BT
	a juniper, 16 ins. in diam., bears S. 56° W., 47 lks. dist., marked $\frac{1}{4}$ S22 BT.
	The original $\frac{1}{4}$ sec. cor. of secs. 22 and 23, which is a ^{stone} 16 x 10 x 8 ins., firmly set, marked $\frac{1}{4}$ on W. face. bears N. 63° 30' E., 180 lks. dist.
	Destroy all trace of this cor.
41.60	Asc. 42 ft. over S. slope.
45.25	Knoll on spur, bears NE. Desc. 40 ft. over NW. slope.
51.00	Wash, 10 lks. wide, course SW. Asc. 106 ft. over N. slope.
57.95	Road, bears NE. and SW.
61.65	Intersect the south side line (5-6) of the Last Chance patented lode mining claim, Min. Sur. No. 1397, at 5.04 chs. dist., S. 74° 20' W., of cor. No. 6 thereof.
	Across patented mineral land.
63.00	Spur, bears NE. Desc. 112 ft. over N. slope.
67.00	Santa Fe R.R. track, bears NE. and SW.
67.50	Telephone line, bears NE. and SW.
69.00	Highway, (Prescott to Skull Valley) bears NE. and SW.
	Telephone line along N. edge of highway, bears NE. and SW.
69.40	Wash, 20 lks. wide, course NE. Asc. 71 ft. over SE. slope.
71.06	Intersect the NW. side line, (1-2) of the Last Chance patented mining claim, Min. Sur. 1397, at 2.40 chs., S.

Resurvey of the Subdivision Lines of T. 14 N., R. 3 W. 63

Chains	74° 20' W., of Cor. No. 1 thereof. Leave patented mineral land.						
73.40	Spur, bears NE. Desc. 30 ft. over N. slope.						
74.60	Wash, 5 lks. wide, course NE. Asc. 71 ft. over SE. slope.						
78.40	Intersect line 3-4 of tract 38, at 1.89 chs. dist., N. 85° 50' W., of Cor. No. 4 thereof. Across patented land.						
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the reestablished cor. of secs. 14, 15, 22 and 23, with brass cap marked <div style="text-align: center;"> <table border="1"> <tr> <td>T 14 N</td> <td>R 3 W</td> </tr> <tr> <td>S 15</td> <td>S 14</td> </tr> <tr> <td>S 22</td> <td>S 23</td> </tr> </table> <p>1931</p> </div> <p>No bearing trees available. Land, mountainous. Soil, rocky 4th rate. Timber, yellow pine, oak and juniper. Undergrowth, oak brush, manzanita, catclaw and cacti.</p> <hr style="border-top: 1px dashed black;"/> <p>N. 89° 50' E., on random line, bet. secs. 14 and 23.</p>	T 14 N	R 3 W	S 15	S 14	S 22	S 23
T 14 N	R 3 W						
S 15	S 14						
S 22	S 23						
40.00	Set temp. $\frac{1}{4}$ sec. cor.						
79.94	Fall 16 lks. N. of the cor. of secs. 13, 14, 23 and 24. Thence, S. 89° 57' W., on true line, bet. secs. 14 and 23. Over mountainous land, through thick timber and undergrowth. Asc. 106 ft. over SE. slope.						
7.95	Spur, bears NE. Desc. 67 ft. over W. slope.						
12.00	Wash, 5 lks. wide, course NE. Asc. 11 ft. over SE. slope.						
15.10	Spur, bears NE. Desc. 67 ft. over W. slope.						
16.50	Wash, 10 lks. wide, course NE. Asc. 198 ft. over SE. slope.						
39.97	Set an iron post, 3 ft. long, 1 in. in diam., 22 ins. in the ground to bedrock, in a mound of stone to top, for the reestablished $\frac{1}{4}$ sec. cor. of secs. 14 and 23, with brass cap marked <div style="text-align: center;"> <table border="1"> <tr> <td>$\frac{1}{4}$ S 14</td> </tr> <tr> <td>S 23</td> </tr> </table> <p>1931 from which</p> </div>	$\frac{1}{4}$ S 14	S 23				
$\frac{1}{4}$ S 14							
S 23							

Chains	a cedar, 14 ins. in diam., bears N. 80° W., 84 lks. dist., marked $\frac{1}{4}$ S14 BT.
	a cedar, 8 ins. in diam., bears S. 20° E., 94 lks. dist., marked $\frac{1}{4}$ S23 BT
43.00	Spur, bears NE. Desc. 54 ft. over NW. slope.
46.25	Old road, bears NW. and SE. -
48.45	Wash, 10 lks. wide, course N. Asc. 16 ft. over NE. slope.
49.25	Spur, bears NE. Desc. 63 ft. over NW. slope.
57.30	Wash, 20 lks. wide, course NE. Asc. 210 ft. over SE. slope.
78.05	Intersect line 1-4 of tract 38, at 1.73 chs. dist., North of Cor. No. 4, thereof. Leave patented land.
79.94	The cor. of secs. 14, 15, 22 and 23. Land, mountainous. Soil, rocky 4th rate. Timber, yellow pine, oak and juniper. Undergrowth, oak brush, catclaw and cacti.

	N. 0° 01' W., on true line, bet. secs. 14 and 15. Over mountainous land, through thick timber and undergrowth. Asc. 98 ft. over SE. slope.
5.40	Spur, bears NE. Desc. 254 ft. over NW. slope.
18.35	Intersect line 1-2 of tract 38, at 1.88 chs. dist., N. 85° 50' W., of Cor. No. 1 thereof. Leave patented land.
19.00	Intersect the S. side line (3-4) of the Oak Tree patented mill site, Min. Sur. 3246B, at 2.18 chs. dist., N. 77° 31' W., of Cor. No. 4 thereof. At this point, wash. 20 lks. wide, course NE.; road, bears NW. and E. Across patented mineral land.
21.00	Spur, bears E. Desc. 15 ft. over NE. slope.
22.45	Wash, 20 lks. wide, course SE. Asc. 32 ft. over SE. slope.
22.67	Intersect the N. side line, (1-2) of the Oak Tree Mill Site, Min. Sur. 3246B, at 2.71 chs. dist., N. 68° 48' W., of Cor. No. 1 thereof. Leave patented mineral land.
29.00	Wash, 5 lks. wide, course E. Asc. 113 ft. over SE. slope.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, in a mound of stone to top, for the reestablished $\frac{1}{4}$ sec. cor. of secs. 14 and 15, with

Resurvey of the Subdivision Lines of T. 14 N., R. 3 W. 65

Chains

brass cap marked

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 15 \quad | \quad \text{S } 14 \\ \frac{1}{4} \end{array}$$

1931

from which

a juniper, 10 ins. in diam., bears S. $2\frac{1}{2}^{\circ}$ E., 131 lks. dist., marked $\frac{1}{4}$ S 14 BT

a juniper, 6 ins. in diam., bears S. $15\frac{1}{2}^{\circ}$ W., 134 lks. dist., marked $\frac{1}{4}$ S 15 BT

This cor. falls on spur, which bears SE. Desc. 21 ft. over NE. slope.

41.75 Wash, 5 lks. wide, course E. Asc. 65 ft. over SE. slope.

44.10 Small spur, bears E. Asc. gradual SE. slope to ridge.

50.30 Road, bears E. and W.

59.90 Ridge, bears E. and W. Desc. 137 ft. over NE. slope.

65.55 Wash, 20 lks. wide, course NE. Thence over rolling NE. slope.

75.00 Wash, 20 lks. wide, course NW. Asc. gradual SW. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 22 ins. in the ground to bedrock, in a mound of stone to top, for the reestablished cor. of secs. 10, 11, 14 and 15. with brass cap marked

$$\begin{array}{c} \text{T } 14 \text{ N } | \text{ R } 3 \text{ W} \\ \text{S } 10 | \text{ S } 11 \\ \hline \text{S } 15 | \text{ S } 14 \\ \frac{1}{4} \end{array}$$

1931

from which

a walnut, 6 ins. in diam., bears N. 83° E., 4 lks. dist., marked T14N R3W S11 BT

a pinon, 4 ins. in diam., bears S. 20° E., 42 lks. dist., marked T14N R3W S14 BT

a wild cherry, 8 ins. in diam., bears S. 38° W., 56 lks. dist., marked T14N R3W S15 BT

a walnut, 8 ins. in diam., bears N. $83\frac{1}{2}^{\circ}$ W., 36 lks. dist., marked T14N R3W S10 BT

Land, mountainous.

Soil, rocky 4th rate.

Timber, yellow pine, oak, juniper and walnut.

Undergrowth, oak brush, manzanita and cacti.

N. $89^{\circ} 57'$ E., on random line, bet. secs. 11 and 14.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.16 Fall 30 lks. S. of the cor. of secs. 11, 12, 13 and 14.

Chains	Thence, S. 89° 44' W., on true line, bet. secs. 11 and 14. Over mountainous land, through thick timber and under- growth.
1.00	Leave bench, bears NE. and SW. Desc. 60 ft. over SW. slope.
4.70	Wash, 10 lks. wide, course NW. Asc. 8 ft. over NE. slope.
9.85	Small spur, bears NW. Desc. 92 ft. over NW. slope.
15.95	Wash, 10 lks. wide, course N. Asc. 82 ft. over gradual NE. slope.
19.20	Road, bears NE. and SW.
22.60	Wash, 10 lks. wide, course NE. Asc. gradual SE. slope.
40.08	Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for the reestablished $\frac{1}{4}$ sec. cor. of secs. 11 and 14, with brass cap marked
	$\frac{1}{4}$ $\frac{S\ 11}{S\ 14}$
	1931 from which
	an oak, 12 ins. in diam., bears N. 14° E., 263 lks. dist., marked $\frac{1}{4}$ S11 BT
	an oak, 10 ins. in diam., bears S. 36° W., 109 lks. dist., marked $\frac{1}{4}$ S14 BT
	Cor. No. 3, of the Iowa patented mining claim, Min. Sur. No. 3246A, bears S. 72° W., 5.41 chs. dist.,
	Cor. No. 1, of the Surprise No. 2, patented mining claim, Min. Sur. No. 1718, bears N. 32° 20' W., 18.95 chs. dist., a stone, marked and witnessed as described in the official record.
	Asc. 6 ft. over SE. slope.
45.10	Small spur, bears NE. Desc. 17 ft. over NW. slope.
46.38	Wash, 10 lks. wide, course N.
49.60	Wash, 10 lks. wide, course N.
55.30	Ridge, bears N. and S. Desc. 54 ft. over W. slope.
60.40	Wash, 30 lks. wide, course NW.
62.30	Wash, 30 lks. wide, course N. Asc. 31 ft. over E. slope.
66.85	Wash, 30 lks. wide, course NE. Road in same, bears N. and S. Asc. 82 ft. over SE. slope.
71.70	Desc. 67 ft. over NW. slope.

Resurvey of the Subdivision Lines of T. 14 N., R. 3 W. 67

Chains

80.16 The cor. of secs. 10, 11, 14, and 15.

Land, mountainous.
Soil, rocky 4th. rate.
Timber, yellow pine, oak, juniper, walnut, and pinion.
Undergrowth, oakbrush, manzanita, catclaw, and cacti.

N. 0° 01' W., on true line, bet. secs. 10 and 11.

Over mountainous land, through thick timber and undergrowth.


Desc. 21 ft. over N.W. slope.

1.05 Wash, 30 lks. wide, course N.E. Asc. 51 ft. over S.E. slope.

5.50 Spur, bears N.E. Desc. 126 ft. over gradual N.E. slope.

36.85 Wash, 20 lks. wide, course N.E.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the reestablished $\frac{1}{4}$ sec. cor. of secs. 10 and 11, with brass cap marked



1931

from which,

a juniper, 10 ins. in diam., bears S. 76° E., 131 lks. dist., marked $\frac{1}{4}$ S 11 B T


a juniper, 8 ins. in diam., bears S. 38 $\frac{1}{2}$ ° W., 90 lks. dist., marked $\frac{1}{4}$ S 10 B T

Desc. 113 ft. over gradual N.E. slope.

51.85 Wash, 20 lks. wide, course N.W.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in the ground for the reestablished cor. of secs. 2, 3, 10, and 11, with brass cap marked

T 14 N R 3 W



1931

from which,

a juniper, 12 ins. in diam., bears N. 64° E., 22 lks. dist., marked T 14 N R 3 W S 2 B T

a yellow pine, 12 ins. in diam., bears S. 48° E., 17 lks. dist., marked T 14 N R 3 W S 11 B T

a yellow pine, 16 ins. in diam., bears S. 24° W., 31 lks. dist., marked T 14 N R 3 W S 10 B T

a yellow pine, 8 ins. in diam., bears N. 68° W., 52 lks. dist., marked T 14 N R 3 W S 3 B T

Land, mountainous.
Soil, rocky 4th. rate.

Chains

Timber, yellow pine, oak, juniper, pinion, and walnut.
Undergrowth, oakbrush, manzanita, cacti, and catclaw.

	N. 89° 44' E., on random line, bet. secs. 2 and 11.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.00	Fall 12 lks. N. of the cor. of secs. 1, 2, 11, and 12. Thence, S. 89° 49' W., on true line, bet. secs. 2 and 11. Over mountainous land, through thick timber and undergrowth. Asc. 22 ft. over N. E. slope.
5.05	Ridge, bears N.W. and S.E. Desc. 106 ft. over gradual W. slope.
9.85	Road, bears N.E. and S.W.
18.60	Road, bears N.E. and S.W.
31.35	Wash, 10 lks. wide, course N. Over rolling land.
40.00	Wash, 20 lks. wide, course N.W. True point for the reestablished $\frac{1}{4}$ sec. cor. falls in wash, where it is impracticable to monument the corner; establish witness cor. as hereinafter described.
40.24	Set an iron post 3 ft. long, 1 in. in diam., 22 ins. in the ground to bedrock, in a mound of stone to top, for Wit reestablished $\frac{1}{4}$ sec. cor. of secs. 2 and 11, with brass cap marked
	$\frac{1}{4} \frac{S 2}{S 11} W C$
	1931 from which,
	a yellow pine, 30 ins. in diam., bears S. 5° E., 89 lks. dist., marked $\frac{1}{4}$ S 11 B T
	an oak, 6 ins. in diam., bears N. 80° W., 71 lks. dist., marked $\frac{1}{4}$ S 2 B T
45.10	Road, bears N.W. and S.E.
48.53	Fence, bears N. and S.W.
52.00	Bend in road, from S.E. to S.W.
54.00	Old cabin, bears S. 150 lks. dist. A spring of water bears S.W. of cabin, about 1 ch. distant.
54.80	Wash, 20 lks. wide, course N. Asc. 92 ft. over N.E. slope.
56.90	Wire fence, bears N. and S.
63.25	Spur, bears N. Desc. 38 ft. over W. slope.
73.30	Wash, 20 lks. wide, course N.W. Asc. gradual N.E. slope.

Resurvey of the Subdivision Lines of T. 14 N., R. 3 W. 69

Chains

80.00 The cor. of secs. 2, 3, 10, and 11.

Land, mountainous.
Soil, rocky 4th. rate.
Timber, yellow pine, oak, juniper, willow, and walnut.
Undergrowth, oakbrush, manzanita, and cacti.

N.0° 01' W., on true line, bet. secs. 2 and 3.


Over mountainous land, through thick timber and undergrowth.

Desc. 59 ft. over N.E. slope.

17.35 Wash, 1 ch. wide, course N.E.

25.75 Wash, 25 lks. wide, course S.E. Asc. 319 ft. over S. slope.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock, in a mound of stone to top for the reestablished $\frac{1}{4}$ sec. cor. of secs. 2 and 3, with brass cap marked



from which,

a pinion, 10 ins. in diam., bears N. 30° W., 23 lks. dist., marked $\frac{1}{4}$ S 3 B T

an oak, 10 ins. in diam., bears N. 54° E., 39 lks. dist., marked $\frac{1}{4}$ S 2 B T


Asc. 88 ft. over broken S. slope.

44.80 Spur, bears S.W. Desc. 37 ft. over N.W. slope.

46.60 Wash, 50 lks. wide, course S.W. Asc. 585 ft. over S. slope.

71.25 Rocky wash, 60 lks. wide, course S.E. Asc. 197 ft. over S. slope.

83.74 Intersect the S. bdy. of sec. 35, T. 15 N., R. 3 W., at 1.50 chs. east of the cor. of secs. 34 and 35, which is an iron post 2 ins. in diam., firmly set, marked on brass cap and witnessed as described in the official record. At point of intersection set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the closing corner of secs. 2 and 3, with brass cap marked



1931

No suitable bearing trees available.

Land, rolling, S. 25 chs.; remainder, rough, broken slope of Granite Mountain. Soil, rocky 4th. rate. Timber, yellow pine, pinion, oak, and juniper. Undergrowth, oakbrush, catclaw and cacti.

chains

- From the reestablished cor. of secs. 33 and 34, on S. bdy. of Tp., hereinbefore described.
- N. $0^{\circ} 01' W.$, on true line, bet. secs. 33 and 34.
- Over mountainous land, through thick timber and undergrowth.
- Asc. 7 ft. over S.E. slope.
- 1.10 Spur, bears N.E. Desc. 30 ft. over N.W. slope.
- 4.27 Wash, 10 lks. wide, course N.E.
- 5.47 Wash, 10 lks. wide, course S.E. Asc. 10 ft. over S.E. slope.
- 7.06 Spur, bears N.E. Desc. 32 ft. over N.W. slope.
- 9.00 Wash, 10 lks. wide, course E. Asc. 28 ft. over S.E. slope.
- 19.35 Spur, bears S.E. Desc. gradual E. slope.
- 21.00 Wash, 5 lks. wide, course S.E. Asc. 12 ft. over S.W. slope.
- 23.20 Spur, bears S.E. Desc. 9 ft. over N. slope.
- 25.40 Wash, 5 lks. wide, course S.E. Asc. 17 ft. over S.W. slope.
- 26.70 Spur, bears S.E. Asc. 11 ft. over S.E. slope.
- 31.25 Spur, bears N.E. Desc. 16 ft. over N. slope.
- 32.15 Wash, 5 lks. wide, course N.E. Asc. 25 ft. over S.E. slope.
- 35.55 Ridge, bears N.E. and W. Desc. 72 ft. over N.E. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the reestablished $\frac{1}{4}$ sec. cor. of secs. 33 and 34, with brass cap marked
- $\frac{1}{4}$
 S 33 | S 34
 1931
- from which,
- a yellow pine, 8 ins. in diam., bears S. $68^{\circ} E.$, 23 lks. dist., marked $\frac{1}{4}$ S 34 B T
- an oak, 12 ins. in diam., bears N. $74^{\circ} W.$, 38 lks. dist., marked $\frac{1}{4}$ S 33 B T
- Desc. 36 ft. over N. E. slope.
- 44.70 Wash, 10 lks. wide, course S.E. Asc. 152 ft. over S.W. slope.
- No. 2,
- 61.16 Intersect the S. bdy. of the Peno Alto pat. lode mining claim, M.S. No. 2424, at 10.37 chs. N. $77^{\circ} 00' W.$ of cor. No. 4 thereof. Across patented mineral land.
- 61.80 Wash, 20 lks. wide, course E. Asc. 139 ft. over S.E. slope.
- 67.26 Intersect the E. side line, of the Iona unsurveyed mining claim at 6.50 chs. N. $77^{\circ} W.$ of the S.E. cor. thereof. Leave patented mineral land.

Resurvey of the Subdivision Lines of T. 14 N., R. 3 W. 71

Chains							
69.70	Wash, 10 lks. wide, course S.E. Asc. 83 ft. over S.W. slope.						
72.39	Intersect the S. side line (1-2) of the Puritan No. 2 pat. lode mining claim, Min. Sur. No. 2424, at 95 lks. S. 81° E., of Cor. No. 2 thereof. Across patented mineral land.						
73.95	Wire fence, bears E. and W.						
74.75	Spur, bears E. Desc. 23 ft. over N.E. slope.						
80.00	Set an iron post 3 ft. long, 2 ins. diam., 20 ins. in the ground to bedrock, in a mound of stone to top, for the reestablished cor. of secs. 27, 28, 33, and 34, with brass cap marked						
<table border="1" style="margin: auto;"> <tr> <td>T 14 N R 3 W</td> <td></td> </tr> <tr> <td>S 28</td> <td>S 27</td> </tr> <tr> <td>S 33</td> <td>S 34</td> </tr> </table>		T 14 N R 3 W		S 28	S 27	S 33	S 34
T 14 N R 3 W							
S 28	S 27						
S 33	S 34						
1931 from which,							
An oak, 6 ins. diam., bears N. 15° E., 16 lks. dist., marked T 14 N R 3 W S 27 B T							
An oak, 6 ins. diam., bears S. 30° E., 29 lks. dist., marked T 14 N R 3 W S 34 B T							
A yellow pine, 10 ins. diam., bears S. 22° W., 25 lks. dist., marked T 14 N R 3 W S 33 B T							
An oak, 6 ins. diam., bears N. 22° W., 24 lks. dist., marked T 14 N R 3 W S 28 B T							
Land, mountainous. Soil, rocky 4th. rate. Timber, yellow pine, oak, juniper, and pinion. Undergrowth, oakbrush, catclaw, cacti, and manzanita.							

40.00	N. 89° 58' E., on a random line, bet. secs. 27 and 34. Set temp. 1/4 sec. cor.						
80.06	Fall 5 lks. N. of the cor. of secs. 26, 27, 34, and 35. Thence, West, on true line, bet. secs. 27 and 34. Over mountainous land, through thick timber and undergrowth. Asc. 154 ft. over N.E. slope.						
4:48	Intersect the S.E. end line (1-4) of the Patsy pat. lode mining claim, Min. Sur. No. 2424, at 1.98 chs. N. 28° E. of Cor. No. 1 thereof. Across patented mineral land.						
8.15	Wash, 10 lks. wide, course N.						
10.05	Wash, 10 lks. wide, course N.E.						

Chains	
16.30	Spur, bears S. Desc. 22 ft. over S.W. slope.
17.40	Wash, 10 lks. wide, course S. Asc. 94 ft. over S.E. slope.
25.85	Spur, bears S.W. Desc. 32 ft. over N.W. slope.
29.30	Wash, 5 lks. wide, course N. Asc. 37 ft. over E. slope.
31.40	Spur, bears N.E. Desc. 38 ft. over N.W. slope.
37.65	Wash, 10 lks. wide, course N.E. Asc. 24 ft. over E. slope.
40.03	Set an iron post 3 ft. long, 1 in. diam., 26 ins. in the ground for the reestablished $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ $\frac{S\ 27}{S\ 34}$
	1931
	from which,
	A yellow pine, 18 ins. diam., bears N. $62\frac{1}{2}^{\circ}$ W., 84 lks. dist., marked $\frac{1}{4}$ S 27 B T
	An oak, 20 ins. diam., bears S. 3° W., 32 lks. dist., marked $\frac{1}{4}$ S 34 B T
	Asc. 13 ft. over N.E. slope.
42.80	Desc. 16 ft. over N.W. slope.
43.80	Old road, bears N.W. and S.E.
45.20	Wash, 10 lks. wide, course N.W. Asc. 43 ft. over N.E. slope.
47.50	Spur, bears N. Desc. 18 ft. over W. slope.
49.45	Wash, 10 lks. wide, course N. Asc. 66 ft. over N.E. slope.
52.40	Wire fence, bears N. and S.
55.00	Ridge, bears N.W. and S.E. Desc. 60 ft. over S.W. slope.
60.75	Wash, 10 lks. wide, course S.E. Over level bottomland.
63.10	Old road, bears N.W. and S.E.
69.35	Old road, bears N.W. and S.E.
71.10	Pump house at Derby Mine spring, bears S. 1 ch. dist.
72.10	Trail, bears N.W. and S.E. Asc. 38 ft. over N.E. slope.
74.55	Shallow wash, 10 lks. wide, course S.E. Continue ascent of 126 ft. over E. slope to
80.06	The cor. of secs. 27, 28, 33, and 34.
	Land, mountainous. Soil, rocky 4th. rate. Timber, yellow pine, oak, juniper, and pinion. Undergrowth, oakbrush, catclaw, cacti, and second growth timber.
	N.0° 01' W., on true line, bet. secs. 27 and 28.
	Over mountainous land, through thick timber and undergrowth.

Resurvey of the Subdivision Lines of T. 14 N., R. 30 W. 4010

- Chains Over patented mineral land, Asc. gradual SE. slope.
 - 1.00 Spur, bears N.E. Desc. 37 ft. over N. slope.
 - 2.40 Wash, 10 lks. wide, course NE. Asc. 17 ft. over SE. slope.
 - 4.00 Spur, bears N.E. Desc. 11 ft. over N.E. slope.
 - 4.20 Derby Mine barn, bears W. about 150 lks. dist.
 - 6.13 Pipe line from Derby Mine houses to spring, bears N.W. and S.E.
 - 8.45 Spur, bears E. Desc. 22 ft. over N.E. slope.
 - 8.80 Wire fence, bears NE. and SW. Road, bears E. and SW.
 - 10.50 Wash, 10 lks. wide, course S.E. Asc. 95 ft. over S.W. slope.
 - 12.55 Wire fence, bears E. and W.
 - 13.00 Road, bears E. and W.
 - 15.90 Divide, bears N.E. and S.W. Desc. 59 ft. over N. slope.
 - 18.15 Wash, 5 lks. wide, course N.E. Asc. 47 ft. over S.W. slope.
 - 24.35 Ridge, bears N.E. and S.W. Desc. 122 ft. along W. slope.
 - 28.80 Same ridge, bears N.W. and S.E. Desc. 87 ft. over N.E. slope.
 - 32.39 Intersect the W. end line (2-3) of the Knocker Doom pat. lode mining claim, Min. Sur. No. 2424, at 1.90 chs. N.19°40'E., of Cor. No. 3 thereof. Leave pat. mineral land.
 - 32.79 Intersect the side line (1-2) of the Surenough pat. lode mining claim, Min. Sur. No. 2424, at 67 lks. N.85°00'E. of Cor. No. 2 thereof. Enter patented mineral land.
 - 37.55 Wash, 5 lks. wide, course E. Asc. 47 ft. over S.W. slope.
 - 40.00 Set an iron post 3 ft. long, 1 in. diam., 20 ins. in the ground to bed rock, in a mound of stone to top, for the reestablished 1/4 sec. cor., with brass cap marked
- | | | |
|------|--|------|
| S 28 | | S 27 |
| 1931 | | |

from which,
- A yellow pine, 18 ins. diam., bears N.50°E., 144 lks. dist., marked 1/4 S 27 B T
 - A yellow pine, 6 ins. dia., bears N.63°W., 9 lks. dist., marked 1/4 S. 28 B T
 - Desc. 104 ft. over N. slope.
 - 40.97 Intersect the N. side line (3-4) of the Surenough pat. lode mining claim, Min. Sur. No. 2424. at 3.13 chs. N.85°E., of Cor. No. 3 thereof. Leave patented mining land.
 - 46.80 Wash, 10 lks. wide, course N.E. Asc. 6 ft. over N.E. slope.

Resurvey of the Subdivision Lines of T.14 N., R.3 W.

Chains	
47.70	Small spur, bears N.E. Desc. 52 ft. over N.E. slope,
49.45	Wash, 10 lks. wide, course E. Asc. 29 ft. over S.E. slope.
52.85	Spur, bears N.E. Desc. 34 ft. over N. slope.
56.20	Spur, bears NE. Desc. 36 ft. over N. slope.
57.85	Wash, 10 lks. wide, course E. Asc. 36 ft. over S.E. slope.
61.00	Spur, bears E. Desc. 47 ft. over N.E. slope.
63.50	Wash, 15 lks. wide, course E. Asc. 55 ft. over S.E. slope.
69.00	Spur, bears NE. Desc. 94 ft. over N.E. slope.
73.00	Wash, 10 lks. wide, course E. Asc. 55 ft. over S.E. slope.
75.60	Spur, bears N.E. Desc. 53 ft. over N.E. slope.
78.60	Wash, 10 lks. wide, course E. Asc. 33 ft. over S.E. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bed rock, in a mound of stone to top, for the reestablished cor. of secs. 21, 22, 27, and 28 with brass cap marked

T 14 N R 3 W

S 21 | S 22

S 28 | S 27

1931

from which

A yellow pine, 8 ins. diam., bears N.40°E., 25 lks. dist., marked T 14 N R 3 W S 22 B T

A juniper, 20 ins. diam., bears S.18½°E., 237 lks. dist., marked T 14 N R 3 W S 27 B T

A juniper, 10 ins. dia., bears S.78°W., 122 lks. dist. marked T 14 N R 3 W S 28 B T

A juniper, 12 ins. diam., bears N.26°W., 86 lks. dist. marked T 14 N R 3 W S 21 B T

Land, mountainous.

Soil, rocky, 4th. rate.

Timber, yellow pine, oak, juniper and pinion.

East, on a random line bet. secs. 22 and 27.

40.00 Set temp. ¼ sec. cor.

80.12 Fall 7 lks. N. of the cor. of secs. 22, 23, 26 and 27.

Thence,

N.89°57'W., on a true line bet. secs. 22 and 27.

Asc. 112 ft. over S.E. slope.

11.05 Spur, bears N.E. Asc. 14 ft. over N.E. slope.

Resurvey of the Subdivision Lines of T. 14 N., R. 3 W. 75

Chains

- 13.90 Head of wash, course N.E.
- 15.14 Spur, bears N.E. Desc. 8 ft. over N.W. slope.
- 16.15 Wash, 10 lks. wide, course N.E. Asc. 39 ft. over S.E. slope.
- 19.40 Spur, bears N.E. Desc. 42 ft. over N.W. slope.
- 22.85 Road, bears N. and S.
- 25.10 Wash, 20 lks. wide, course N.E. Asc. 144 ft. over S.E. slope.
- 31.95 Wash, 20 lks. wide, course N.E.
- 40.06 Set an iron post 3 ft. long, 1 in. diam., 26 ins. in the ground, for the reestablished $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4} \begin{array}{l} S 22 \\ \hline S 27 \\ 1931 \end{array}$$

No bearing trees available; raise a mound of stone 4 ft. base, 2 ft. high N. of cor.

Asc. 105 ft. over N.E. slope.
- 53.40 Old road, bears N.E. and S. Thence along ridge top.
- 54.25 Divide, bears N.E. and S. Desc. 331 ft. over W. slope.
- 68.25 Wash, 15 lks., wide, course N. Asc. 57 ft. over N.E. slope.
- 71.35 Spur, bears N.E. Desc. 30 ft. over N.W. slope.
- 73.30 Wash, 10 lks. wide, course N.E. Asc. 131 ft. over S. slope.
- 80.12 The cor. of secs. 21, 22, 27, and 28.


Land, mountainous.
Soil, rocky 4th. rate.
Timber, yellow pine, oak, juniper, and pinion.
Undergrowth, oakbrush, catclaw, and tacti.

N. 0° 01' W., on true line, bet. secs. 21 and 22.

Over mountainous land, through scattering timber and undergrowth.

Asc. gradual S.E. slope.
- 1.00 Spur, bears N.E. Desc. 125 ft. over N.W. slope.
- 5.50 Wash, 20 lks. wide, course N.E. Asc. 41 ft. over S.E. slope.
- 7.90 Spur, bears N.E. Desc. 185 ft. over N.E. slope.
- 16.20 Wash, 20 lks. wide, course N.E.


Chains	
20.70	Same wash, course N.W. Asc. 117 ft. over S.W. slope.
28.40	Spur, bears W. Desc. 129 ft. over N.W. slope.
33.10	Wash, 25 lks. wide, course S.W. Asc. 138 ft. over S. slope.
40.00	Set an iron post 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the reestablished $\frac{1}{4}$ sec. cor., with brass cap marked



No bearing trees available.

Asc. 107 ft. over S. slope.

42.10	Santa Fe Ry. track, on curve, bears N.E. and N.W.
43.05	Telephone line, bears N.E. and N.W.
47.10	Spur, bears E. Desc. 29 ft. over N.E. slope.
51.50	Wash, 20 lks. wide, course S.E. Asc. 130 ft. over S. slope.
60.60	Ridge, bears E. and N.W. Desc. 188 ft. over N.E. slope.
70.90	Yellow pine 20 ins. diam., on line; notch same on N. and S. faces.
71.75	Wire fence, bears E. and W. Enter Iron Springs Outing Club Grounds.
73.60	House bears E. 30 lks. dist.
75.20	Road, bears N.W. and S.E.
77.40	House, bears W. 60 lks. dist.
78.15	House on line.
80.00	Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in ground, for the reestablished cor. of secs. 15, 16, 21, and 22, with brass cap marked



1931 from which,

A juniper, 60 ins. diam., bears N. 32° E., 77 lks. dist., marked T 14 N R 3 W S 15 B T

A yellow pine, 16 ins. diam., bears S. 35° E., 7 lks. dist., marked T 14 N R 3 W S 22 B T

Resurvey of the Subdivision Lines of T. 14 N., R. 3 W. 77

Chains	
	<p>a yellow pine, 16 ins. in diam., bears S. 59° W., 20 lks. dist., marked T14N R3W S21 BT</p> <p>a yellow pine, 20 ins. in diam., bears N. 18° W., 131 lks. dist., marked T14N R3W S16 BT</p> <p>Land, mountainous. Soil, rocky 4th rate Timber, yellow pine, oak, juniper and pinon. Undergrowth, oak brush, cacti, catelaw and manzanita.</p> <hr style="border-top: 1px dashed black;"/>
40.00	S. 89° 57' E., on a random line, bet. secs. 15 and 22. Set temp. $\frac{1}{4}$ sec. cor.
80.02	Fall 7 lks. S. of the cor. of secs. 14, 15, 22 and 23. Thence, West, on true line, bet. secs. 15 and 22. Over mountainous land, through thick timber and undergrowth. Asc. 186 ft. over SE. slope, across patented land.
10.20	Spur, bears NE. Desc. 196 ft. over NW. slope.
17.78	Intersect line 2-3 of tract 38, at 0.35 chs. dist., North of Cor. No. 3 thereof. Leave patented land.
22.73	Intersect line 1-2 of tract 39, at 4.96 chs. dist., N. 85° 50' W., of Cor. No. 1 thereof. Across patented land.
25.30	Telephone line, bears NW. and SE.
25.40	Road, bears NW. and SE. (Iron Springs- Prescott Highway) on ridge, which bears E. and NW.
29.55	Center of Santa Fe R.R. double tracks, bears S. 40 lks., track on curve, from SE. to SW.
34.50	Small R.R. signal house, bears SE. 2 chs. dist. (Alto siding).
40.01	Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, in a mound of stone to top. for the reestablished $\frac{1}{4}$ sec. cor. of secs. 15 and 22. with brass cap marked
	$\frac{1}{4}$ <u>S 15</u> S 22
	1931 from which
	<p>a yellow pine, 8 ins. in diam., bears N. 63° W., 19 lks. dist., marked $\frac{1}{4}$ S15 BT</p> <p>a yellow pine, 10 ins. in diam., bears S. 22° W., 42 lks. dist., marked $\frac{1}{4}$ S22 BT</p>

BOOK 4010

78. Resurvey of the Subdivision Lines of T. 14 N., R. 3 W.

Chains	
42.25	Wash, 30 lks. wide, course SE.
43.45	Wash, 10 lks. wide, course SE.
47.90	Road, bears N. and S.
56.25	Wash, 10 lks. wide, course SE. Asc. gradual NE. slope.
57.45	Intersect line 3-4 of tract 39, at 1.10 chs. dist., South of Cor. No. 3 thereof. Leave patented land.
68.90	Wire fence, bears NE. and SW. Enter Iron Springs Outing Club grounds.
69.25	Divide, bears N. and S. Desc. 62 ft. over SW. slope.
70.80	Road, bears NE. and SW.
77.90	House, bears SE. 50 lks. dist.
78.50	Road, bears NW. and SE.
79.52	Wash, 10 lks. wide, course NW. Asc. slight NE. slope.
80.02	The cor. of secs. 15, 16, 21 and 22.


Land, mountainous.
Soil, rocky 4th rate.
Timber, yellow pine, oak and juniper.
Undergrowth, oak brush, manzanita and cacti.

	Resurvey and Survey of the Subdivision Lines of T. 14 N., R. 3 W. N. 0° 01' W., on true line bet. secs. 15 and 16. Over mountainous land, through thick timber and under- growth. Desc. gradual N. slope.
.50	Wash, 10 lks. wide, course W. Asc. 31 ft. over SW. slope.
1.40	Road, bears E. and W.
2.20	House, bears E., 20 lks. dist.
4.65	Spur; bears SW. Desc. 33 ft. over NW. slope.
6.70	Wash, 10 lks. wide, course SW. Asc. 63 ft. over SE. slope.
9.20	Wire fence, bears NW. and SE.
10.00	Spur, bears SW. Desc. 41 ft. over NW. slope.
16.25	Road, bears E. and W. (Skull Valley-Prescott Highway.)
16.35	Telephone line, bears E. and W.
17.55	Wash, 20 lks. wide, course SW. Asc. 183 ft. over SE. slope.
30.30	Divide, bears NW. and SE. Asc. gradual NE. slope.

Resurvey
and
Survey of the Subdivision Lines of T. 14 N., R. 3 W. 1919

Chains

- 32.70 Spur, bears N.E. Desc. 40 ft. over N.W. slope.
- 37.00 Wash, 10 lks. wide, course N.E. Asc. 25 ft. over S.E. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top for the reestablished $\frac{1}{4}$ sec. cor., with brass cap marked




from which,

A juniper, 15 ins. diam., bears N. 12° W., 110 lks. dist., marked $\frac{1}{4}$ S 16 B T

No other bearing tree available.

Asc. 364 ft. over S.E. slope to ridge.

- 49.60 Wash, 10 lks. wide, course S.E. Asc. 120 ft. over S. slope.
- 71.85 Ridge, bears E. and W. Desc. gradual N. slope.
- 73.40 Wash, 10 lks. wide, course W. Asc. 120 ft. over S. slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. diam., 8 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the cor. of secs. 9, 10, 15, and 16, with brass cap marked



from which,

a yellow pine, 10 ins. diam., bears N. 3° E., 53 lks. dist., marked T 14 N R 3 W S 10 B T

No other bearing tree available.

Land, mountainous.
 Soil, rocky 4th. rate.
 Timber, yellow pine, oak, and juniper.
 Undergrowth, oakbrush, catclaw, manzanita, and cacti.

East, on a random line, bet. secs. 10 and 15.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 79.90 Intersect the cor. of secs. 10, 11, 14, and 15.
 Thence,
 West, on true line, bet. secs. 10 and 15.
 Over mountainous land, through thick timber and undergrowth.

Resurvey
and

80

Survey of the Subdivision Lines of T. 14 N., R. 3 W.

Chains


	Desc. 16 ft. over N.W. slope.
.75	Wash, 20 lks. wide, course N.E. Asc. 188 ft. over N.E. slope, over ground broken with huge granite boulders.
15.25	Wash, 20 lks. wide, course N.E. Asc. 110 ft. over N.E. slope.
25.70	Wash, 20 lks. wide, course N.E. Asc. 242 ft. over N.E. slope.
40.00	Set an iron post 3 ft. long, 1 in. diam., 26 ins. in the ground, for the reestablished $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \begin{array}{l} S 10 \\ S 15 \end{array}$
	1931 from which,
	An oak, 6 ins. in diam., bears N. 12° E., 59 lks. dist., marked $\frac{1}{4}$ S 10 B T
	A pinion, 8 ins. diam., bears S. 14° W., 112 lks. dist., marked $\frac{1}{4}$ S 15 B T
	<u>Survey.</u>
	Asc. 479 ft. over E. slope.
59.70	Ridge, bears N.E. and S.W. A knoll, about 25 ft. above line, bears N.E. about 3 chs. dist. Desc. 305 ft. over N.W. slope.
74.10	Wash, 10 lks. wide, course N.E. Asc. 106 ft. over E. slope.
80.00	the cor. of secs. 9, 10, 15, and 16.
	Land, mountainous. Soil, rocky 4th. rate. Timber, yellow pine, oak, and juniper; some walnut along larger washes. Undergrowth, oakbrush, catclaw, and cacti.

	N. 0° 01' W., on true line, bet. secs. 9 and 10.
	Over mountainous land, through thick timber and undergrowth. Desc. 562 ft. over N.W. slope.
20.70	Wash, 20 lks. wide, course N.E.
24.55	Wash, 20 lks. wide, course N.E. Asc. 147 ft. over S.E. slope.
40.00	True point for the $\frac{1}{4}$ sec. cor. falls on face of granite cliff, 30 ft. high, where it is impracticable to monument the cor.; establish witness cor. as hereinafter described.
43.00	Set an iron post 3 ft. long, 1 in. diam., 26 ins. in the ground, for the witness cor. to the $\frac{1}{4}$ sec. cor., with brass cap marked

Survey.
and

Resurvey of the Subdivision Lines of T. 14 N., R. 3 W. 81

Chains



No suitable bearing trees available; raise a mound of stone 4 ft. base, 2 ft. high W. of cor.


Continue ascent of 456 ft. over S.E. slope.

60.70 Spur, bears E. Desc. 285 ft. over N.E. slope.

76.20 Asc. 31 ft. over rocky knoll.

77.95 Knoll, 1 ch. diam., on spur, bears N.E. Desc. 59 ft. over N.E. slope.

80.00 Set an iron post 3 ft. long, 2 ins. diam., 6 ins. in the ground to bedrock, alongside a cross 6 ins. long, chiseled in face of outcropping granite ledge, in a mound of stone to top, for the cor. of secs. 3, 4, 9, and 10, with brass cap marked



1931

No bearing trees available.

Land, mountainous.
Soil, rocky 4th. rate.
Timber, yellow pine, oak, and juniper.
Undergrowth, oakbrush, catclaw, manzanita, and cacti.

East, on a random line, bet. secs. 3 and 10.

40.00 Set temp. 1/4 sec. cor.

80.00 Fall 12 lks. N. of the cor. of secs. 2, 3, 10, and 11.

Thence, Resurvey.

N. 89° 55' W., on true line, bet. secs. 3 and 10.

Over mountainous land, through thick timber and undergrowth.

Desc. 49 ft. over N.W. slope.

4.00 Wash, 30 lks. wide, course N. Asc. 51 ft. over N.E. slope.

11.70 Small spur, bears N. Desc. 32 ft. over N.W. slope.

13.40 Wash, 60 lks. wide, course N. Asc. 40 ft. over N.E. slope.

17.05 Small spur, bears N.E. Desc. 19 ft. over N.W. slope.

22.65 Asc. 62 ft. over N.E. slope.

Resurvey
and

82 Survey of the Subdivision Lines of T. 14 N., R. 3 W.

Chains

- 27.05 Spur, bears N.E. Desc. 32 ft. over N.W. slope.
- 29.30 Wash, 20 lks. wide, course N.E. Asc. 96 ft. over N.E. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. diam., 26 ins. in the ground for the reestablished $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{\frac{1}{4}}{S 3}$$

$$S 10$$

1931 from which,

A juniper, 12 ins. diam., bears N. 68° E., 66 lks. dist., marked $\frac{1}{4}$ S 3 B T

A juniper, 10 ins. diam., bears S. 55° W., 97 lks. dist., marked $\frac{1}{4}$ S 10 B T.

Survey.

Continue ascent of 143 ft. over N.E. slope.

- 51.76 Spur, bears S.E. Desc. 38 ft. over S.W. slope.
- 53.90 Wash, 10 lks. wide, course S.E. Asc. 442 ft. over E. slope of knoll.
- 66.70 Granite Hill, with precipitous sides about 100 ft. high, on spur, from W. Desc. 81 ft. over W. slope.
- 75.05 Head of wash, course S.E. Asc. 80 ft. over N.E. slope.
- 80.00 The cor. of secs. 3, 4, 9, and 10.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, yellow pine, oak, pinion, and juniper.

Undergrowth, oakbrush, manzanita, catclaw, and cacti.

N. 0° 01' W., on true line, bet. secs. 3 and 4.

Over mountainous land, through thick timber and undergrowth.

Desc. 428 ft. over N.E. slope.

- 26.20 Wash, 20 lks. wide, course N.E.
- 39.50 Wash, 30 lks. wide, course N.E.
- 40.00 Set an iron post 3 ft. long, 1 in. diam., 26 ins. in the ground, for the $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{\frac{1}{4}}{S 4} \quad | \quad S 3$$

1931 from which,

A juniper, 12 ins. diam., bears N. 68° E., 66 lks. dist., marked $\frac{1}{4}$ S 3 B T


A juniper, 10 ins. diam., bears S. 55° W., 97 lks. dist., marked $\frac{1}{4}$ S 4 B T

Survey and Resurvey of the Subdivision Lines of T. 14 N., R. 3 W.

Chains

- Desc. 31 ft. over N.W. slope.
- 44.20 Rocky wash, 50 lks. wide, course N.E. Asc. 114 ft. over N.E. slope.
- 49.00 Rocky knoll, on spur, bears N.E. Desc. 163 ft. over N.E. slope.
- 61.80 Trail, bears E. and W.
- 65.30 Wash, 25 lks. wide, course S.E.
- 66.20 Wash, 10 lks. wide, course S.E. Asc. 310 ft. over S.W. slope of Granite Mountain.
- 68.00 Corral, bears East 2 chs. distant.
- 83.70 Intersect the S. bdy. of sec. 34, T. 15 N., R. 3 W., at 1.62 chs. East of the Cor. of secs. 33 and 34, which is an iron post 2 ins. diam., firmly set, with brass cap marked and witnessed as described in the official record.

At point of intersection set an iron post 3 ft. long, 2 ins. diam., 18 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the closing corner of secs. 3 and 4, with brass cap marked



No bearing trees available.

Land, mountainous.
Soil, rocky 4th. rate.
Timber, yellow pine, oak, juniper, and pinion.
Undergrowth, oakbrush, manzanita, catclaw, and cacti.

Resurvey.

- From the reestablished cor. of secs. 32 and 33, on the S. bdy. of Tp., hereinbefore described.
- N. 0° 02' W., on true line, bet. secs. 32 and 33.
- Over mountainous land, through thick timber and undergrowth.
- Asc. 26 ft. over S.E. slope.
- 4.25 Desc. 90 ft. over N.E. slope.
- 7.75 Wash, 10 lks. wide, course E. Asc. 29 ft. over S.E. slope.
- 12.15 Spur, bears N.E. Desc. 724 ft. over N.E. slope.
- 20.35 Wash, 10 lks. wide, course N.E.
- 40.00 Set an iron post 3 ft. long, 1 in. diam., 16 ins. in the ground, to bedrock, in a mound of stone to top, for the 1/4 sec. cor. of secs. 32 and 33, with brass cap marked

Chains

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 32 \quad | \quad \text{S } 33 \\ 1931 \end{array}$$

from which,

A yellow pine, 18 ins. diam., bears S. 82° E., 34 lks. dist., marked $\frac{1}{4}$ S 33 B T

A yellow pine, 36 ins. diam., bears S. 1° W., 12 lks. dist., marked $\frac{1}{4}$ S 32 B T

Desc. 188 ft. over N.E. slope.

46.85 Wash, 20 lks. wide, course S.W. Asc. 95 ft. over S. slope.

51.20 Small spur, bears S.W. Desc. 23 ft. over N.W. slope.

55.65 Wash, 10 lks. wide, course S.W. Asc. 330 ft. over S. slope.

77.00 Spur, bears N.W. Desc. 88 ft. over N. slope.

80.00 Set an iron post 3 ft. long, 2 ins. diam., 26 ins. in the ground for the reestablished cor. of secs. 28, 29, 32, and 33, with brass cap marked

$$\begin{array}{c} \text{T } 14 \text{ N } \quad \text{R } 3 \text{ W} \\ \text{S } 29 \quad | \quad \text{S } 28 \\ \text{S } 32 \quad | \quad \text{S } 33 \end{array}$$

1931

from which,

A yellow pine, 12 ins. diam., bears N. 22° E., 77 lks. dist., marked T 14 N R 3 W S 28 B T

A yellow pine, 24 ins. diam., bears S. $81\frac{1}{2}^{\circ}$ E., 93 lks. dist., marked T 14 N R 3 W S 33 B T

A yellow pine, 30 ins. diam., bears S. 28° W., 55 lks. dist., marked T 14 N R 3 W S 32 B T

A yellow pine, 8 ins. diam., bears N. 45° W., 36 lks. dist., marked T 14 N R 3 W S 29 B T

Land, mountainous.

Soil, rocky 4th. rate.

Timber, yellow pine, oak, juniper, willow, and walnut.

Undergrowth, oakbrush, catclaw, manzanita, and cacti.

N. $89^{\circ} 58'$ E., on a random line, bet. secs. 28 and 33.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.10 Intersect the cor. of secs. 27, 28, 33, and 34.

Thence,

S. $89^{\circ} 58'$ W., on true line, bet. secs. 28 and 33.

Over mountainous land, through thick timber and undergrowth.

Across patented mineral land.

Resurvey of the Subdivision Lines of T. 14 N., R. 3 W. 85

Chains	
	Asc. 55 ft. over E. slope.
2.10	Wire fence, bears N. and S.
3.20	Road, bears N. and S.
3.65	Divide, bears N. and S. Desc. 190 ft. over W. slope.
3.70	Derby Mine Bunkhouse, bears 30 lks. N. In line with this house and extending Northerly are several other houses.
5.95	Wash, 10 lks. wide, course S.W.
12.35	Hoist house, bears N.E. 2 chs. distant.
13.55	Stamp mill, bears N. 30 lks. distant, over wash, course S.W. Asc. 40 ft. over S.E. slope.
18.25	Spur, bears S.W. Desc. 265 ft. over W. slope.
20.80	Intersect the W. side line (3-4) of the Happy Strike pat. lode mining claim, Min. Sur.No.2424, at 2.28 chs. S. 29°W., of Cor. No. 4 thereof. Leave patented mineral land.
26.85	Wash, 10 lks. wide, course S.W. Asc. 36 ft. over S.E. slope.
31.85	Spur, bears S.W. Desc. 162 ft. over W. slope.
39.85	Wash, 10 lks. wide, course N.
40.05	Set an iron post 3 ft. long, 1 in. diam., 26 ins. in the ground for the reestablished $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S \ 28}{S \ 33}$
	1931 from which,
	A yellow pine, 10 ins. diam., bears N. 76° W., 7 lks. dist., marked $\frac{1}{4}$ S 28 B T
	A yellow pine, 8 ins. diam., bears S. 5° W., 30 lks. dist., marked $\frac{1}{4}$ S 33 B T
	Asc. 193 ft. over N.E. slope to spur.
40.40	Old trail, bears N.W. and S.E.
47.60	Spur, bears N.E. Desc. 129 ft. over N.W. slope.
52.30	Wash, 10 lks. wide, course N.E. Asc. 235 ft. over E. slope.
63.80	Spur, bears N.E. Desc. 99 ft. over N.W. slope.
66.65	Head of wash, course N. Asc. 46 ft. over N.E. slope.
69.05	Spur, bears N.E. Desc. 62 ft. over N.W. slope.
72.60	Wash, 20 lks. wide, course N.E. Asc. 34 ft. over N.E. slope.
77.80	Spur, bears N.E. Desc. 22 ft. over N.W. slope.
78.95	Wash, 10 lks. wide, course N.E. Asc. 17 ft. over N.E. slope.

Chains

80.10

The cor. of secs. 28, 29, 32, and 33.

Land, mountainous.
Soil, rocky 4th. rate.
Timber, yellow pine, oak, and juniper.
Undergrowth, oakbrush, manzanita, catclaw, and cacti.

N. 0° 02' W., on true line, bet. secs. 28 and 29.

Over mountainous land, through thick timber and undergrowth.

Desc. 475 ft. over N. slope to Spruce Canyon wash.

7.90

Wash, 10 lks. wide, course N.W.

10.10

Low spur, bears N.W. Desc. N.E. slope.

14.50


Wash, 20 lks. wide course N.E.

18.80

Wash, 20 lks. wide, course W. Asc. 572 ft. over S.W. slope.

40.00

Set an iron post 3 ft. long, 1 in. diam., 8 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the reestablished $\frac{1}{4}$ sec. cor., with brass cap marked



No suitable bearing trees available.

Asc. 12 ft. over S. slope.

41.50

Knoll, on spur from E. Desc. 695 ft. over N.W. slope.

76.45


Wash, 50 lks. wide; course S.W. Asc. 50 ft. over S.E. slope.

78.30

Road from Iron Springs to McKinley Mine, bears N.E. and S.W. Telephone line along same.

80.00

Set an iron post 3 ft. long, 2 ins. diam., 22 ins. in the ground, to bedrock, in a mound of stone to top, for the reestablished cor. of secs. 20, 21, 28, and 29, with brass cap marked



from which,

A juniper, 8 ins. diam., bears N. 14° E., 132 lks. dist., marked T 14 N R 3 W S 21 B T

A juniper, 10 ins. diam., bears S. 80 $\frac{1}{4}$ ° E., 198 lks. dist., marked T 14 N R 3 W S 28 B T

A juniper, 9 ins. diam., bears S. 53° W., 235 lks. dist., marked T 14 N R 3 W S 29 B T

Resurvey of the Subdivision Lines of T. 14 N., R. 3 W. 87

Chains

A juniper, 20 ins. diam., bears N. 12 1/4° W., 308 lks. dist., marked T 14 N R 3 W S 20 B T

Land, mountainous.
Soil, rocky 4th. rate.
Timber, yellow pine, oak, juniper, and pinion.
Undergrowth, oakbrush, catclaw, and cacti.

N. 89° 58' E., on a random line, bet. secs., 21 and 28.

40.00 Set temp. 1/4 sec. cor.

79.94 Fall 2 lks. S. of the cor. of secs. 21, 22, 27, and 28.

Thence,

S. 89° 57' W., on true line, bet. secs. 21 and 28.

Over mountainous land, through thick timber and undergrowth.

Asc. 85 ft. over N.E. slope.

6.70 Spur, bears N.E. Desc. 14 ft. over N.W. slope.

9.00 Wash, 20 lks. wide, course N.E. Asc. 338 ft. over E. slope.

20.20 Spur, bears N.W. Desc. 532 ft. over W. slope.

39.97 Set an iron post 3 ft. long, 1 in. diam., 18 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the reestablished 1/4 sec. cor., with brass cap marked

1/4 S 21
S 28
1931

No bearing trees available.

Desc. 216 ft. over W. slope.

45.00 Wash, 20 lks. wide, course S.W.

51.85 Wash, 20 lks. wide, course N.W. Asc. 22 ft. over N. slope.

55.25 Spur, bears N. Desc. 184 ft. over N.W. slope.

72.15 Iron Springs wash, 30 lks. wide, course S.W. Asc. 28 ft. over S.E. slope.

74.70 Telephone line, bears N.E. and S.W.

79.20 Road, bears NE. and SW.

79.94 Intersect the cor. of secs. 20, 21, 28, and 29.

Land, mountainous.
Soil, rocky 4th. rate.
Timber, yellow pine, oak, and juniper.
Undergrowth, oakbrush, cacti, and catclaw.

Chains

N. $0^{\circ} 02'$ W., on true line, bet. secs. 20 and 21.

Over mountainous land, through scattering timber and undergrowth.

Asc. 101 ft. over S.E. slope.

8.30 Spur, bears S.W. Desc. 52 ft. over N.W. slope.

13.25 Asc. 71 ft. over S.W. slope.

25.80 Spur, bears S.W. Desc. gradual W. slope.

27.80 Wash, 20 lks. wide, course S.W. Asc. 132 ft. over S.W. slope.

40.00 Spur, bears W. Set an iron post 3 ft. long, 1 in. diam., 22 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the $\frac{1}{4}$ sec. cor., with brass cap marked $\frac{1}{4}$

S 20 | S 21

1931

No suitable bearing trees available.

Desc. 68 ft. over N. slope.

46.60 Wash, 10 lks. wide, course N.E. Asc. 49 ft. over S.E. slope.

51.15 Spur, bears N.E. Desc. 182 ft. over N. slope.

63.25 Old road, bears N.W. and S.E.

69.80 Wash, 20 lks. wide, course N.W. Asc. 18 ft. over S.W. slope.

75.95 Spur, bears N.W. Desc. 23 ft. over N.W. slope.

78.42 Wash, 20 lks. wide, course W. Asc. 23 ft. over S.W. slope.

80.00 Set an iron post 3 ft. long, 2 ins. diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the cor. of secs. 16, 17, 20, and 21, with brass cap marked

T 14	N	R 3	W
S 17		S 16	
S 20		S 21	

1931

from which,

A juniper, 24 ins. in diam., bears S. 4° W., 298 lks. dist., marked T 14 N R 3 W S 20 B T

No other bearing trees available.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, yellow pine, oak, and juniper.

Undergrowth, oakbrush, catclaw, and cacti.

Resurvey of the Subdivision Lines of T. 14 N., R. 3 W. 89

Chains	<p>Thence, N. 89° 57' E., on a random line, bet. secs. 16 and 21. 40.00 Set temp. $\frac{1}{4}$ sec. cor. 79.94 Fall 12 lks. S. of the cor. of secs. 15, 16, 21, and 22. Thence, S. 89° 52' W., on true line, bet. secs. 16 and 21. Over mountainous land, through thick timber and under- growth. Desc. gradually over rolling N.W. slopes 225 ft. to Iron Springs wash. 1.20 Road, bears N.E. and S.W. 3.50 House bears S.E. 30 lks. dist., house bears N.E. 1 ch. dist. 4.30 House, bears N., 1 ch. dist., house bears S. 1 ch. dist. 4.60 Wash, 20 lks. wide, course S.W. 6.00 House bears S. 60 lks. dist. 7.00 House bears N. 1 ch. dist., roads fork N., N.W. and S.W. 10.35 House bears S. 1 ch. dist. 12.35 House bears S. 120 lks. dist. 12.95 Wash, 20 lks. wide, course N. 14.35 House bears S. 120 lks. dist. 14.65 House bears S. 50 lks. dist. 15.45 House bears S. 30 lks. dist. 16.75 House bears S. 10 lks. dist. 17.75 House bears S. 150 lks. dist. 18.95 Wash, 20 lks. wide, course N.W. 20.20 House bears S. 20 lks. dist. 21.72 House bears S.E. 1 ch. dist. 22.70 Road, bears N.E. and S.W. Desc. 75 ft. over N.W. slope. 23.70 Iron Springs wash, 30 lks. wide, course S.W. 25.45 Wire fence, bears N. and S. 26.12 R.R. Station, on line. 26.40 Santa Fe Ry. track, bears N.W. and S. 27.30 Road, bears N.E. and S.W. 34.00 Wash, 50 lks. wide, course S.W. Asc. 34 ft. over S.E. slope.</p>
--------	--

Resurvey and

90

Survey of the Subdivision Lines of T. 14 N., R. 3 W.

Chains

- 36.50 Spur, bears S. Desc. 26 ft. over S.W. slope.
- 38.30 Wash, 20 lks. wide, course S.E. Asc. 26 ft. over S.E. slope.
- 39.97 Set an iron post 3 ft. long, 1 in. diam., 28 ins. in the ground for the reestablished $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4} \begin{array}{l} S 16 \\ S 21 \end{array}$$

1931

from which,

An oak, 12 ins. diam., bears N. $32\frac{1}{2}^{\circ}$ E., 192 lks. dist., marked $\frac{1}{4}$ S 16 B T

A juniper, 5 ins. diam., bears S. $9\frac{1}{4}^{\circ}$ W., 129 lks. dist., marked $\frac{1}{4}$ S 21 B T

Survey.

Asc. 180 ft. over N.E. slope.

- 40.65 Santa Fe Ry. track, bears N.E. and S.
- 51.15 Ridge, bears N. and S. Desc. 402 ft. over S.W. slope.
- 66.20 Santa Fe Ry. track, bears N. and S.
- 66.70 Telephone line, bears N. and S.
- 76.65 Wash, 20 lks. wide, course S.W. Asc. gradual S.E. slope.
- 79.94 The cor. of secs. 16, 17, 20, and 21.

Land, mountainous.
Soil, rocky 4th. rate.
Timber, yellow pine, oak, and juniper.
Undergrowth, oakbrush, catclaw, and cacti.

N. $0^{\circ} 02'$ W., on true line, bet. secs. 16 and 17.

Over mountainous land, through thick timber and undergrowth.


Asc. 22 ft. over S. slope.

- 4.55 Spur, bears S.W. Desc. gradual N.W. slope.
- 17.40 Wash, 15 lks. wide, course S.W. Asc. 57 ft. over S.W. slope.
- 23.35 Telephone line, bears N.W. and S.E.
- 24.30 Santa Fe R.R. track, bears N.W. and S.E.
- 27.55 Wash, 1 ch. wide, course S.W. Asc. 140 ft. over S.W. slope.
- 39.70 Iron Springs-Skull Valley Hgy., bears N.E. and S.W.
- 40.00 True point for the $\frac{1}{4}$ sec. cor. falls on steep slope of highway embankment where it is impracticable to monument the cor., establish witness cor. as hereinafter described.
- 40.30 Top of 20 ft. embankment, bears N.E. and W. Asc. slight S.E. slope.

Survey of the Subdivision Lines of T. 14 N.; R. 3 W. 91

Chains

40.60 Set an iron post 3 ft. long, 1 in. diam., 22 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for witness cor. to the 1/4 sec. cor., with brass cap marked




Asc. 63 ft. over S.E. slope.

44.25 Telephone line, bears N.W. and S.E.

45.50 Spur, bears S.W. Desc. 59 ft. over gradual N.W. slope.

77.95 Wash, 20 lks. wide, course S.W. Asc. 19 ft. over S.E. slope.

80.00 Set an iron post 3 ft. long, 2 ins. diam., 24 ins. in the ground, for the cor. of secs. 8, 9, 16, and 17, with brass cap marked



1931

from which,

A juniper, 30 ins. diam., bears N. 70° W., 28 lks. dist., marked T 14 N R 3 W S 8 B T

No other bearing tree available. Raise a mound of stone 4 ft. base, 2 ft. high W. of cor.

Land, mountainous.
Soil, rocky 4th. rate.
Timber, yellow pine, oak, and juniper.
Undergrowth, oakbrush, manzanita, catclaw, and cacti.

N. 89° 52' E., on a random line, bet. secs. 9 and 16.

40.00 Set temp. 1/4 sec. cor.

79.94 Fall 7 lks. N. of the cor. of secs. 9, 10, 15 and 16.

Thence,

S. 89° 55' W., on true line, bet. secs. 9 and 16.

Over mountainous land, through thick timber and undergrowth.

Desc. 278 ft. over W. slope.

10.20 Wash, 10 lks. wide, course N. Asc. 142 ft. over N.E. slope.

16.10 Divide, bears N.W. and S.E. Desc. 172 ft. over E. slope.

22.00 Wash, 10 lks. wide, course N.W. Asc. 51 ft. over N.E. slope.

26.30 Spur, bears N.W. Desc. 246 ft. over N.W. slope.

35.35 Wash, 20 lks. wide, course S.W. Asc. 12 ft. over S.E. slope.

Chains

39.97 Set an iron post 3 ft. long, 1 in. diam., 26 ins. in the ground, for the $\frac{1}{4}$ sec. cor. with brass cap marked

$$\frac{\frac{1}{4}}{S 9}$$

$$S 16$$

1931

No bearing trees available; raise a mound of stone 4 ft. base, 2 ft. high N. of cor.

Asc. 64 ft. over S.E. slope.

42.95 Spur, bears S.W. Desc. 243 ft. over S.W. slope.

56.80 Wash, 10 lks. wide, course S.W. Desc. 212 ft. over S.W. slope.

79.94 The cor. of secs. 8, 9, 16, and 17.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, yellow pine, oak, and juniper.

Undergrowth, oakbrush, catclaw, and cacti.

N. 0° 02' W., on true line, bet. secs. 8 and 9.

Over mountainous land, through thick timber and undergrowth.

Asc. 46 ft. over S.E. slope.

21.35 Spur, bears W. Desc. 40 ft. over N.W. slope.

27.75 Wash, 10 lks. wide, course W. Asc. gradual S.W. slope.

29.05 Spur, bears W. Desc. 21 ft. over N. slope.

32.05 Wash, 20 lks. wide, course W. Asc. gradual S.W. slope.

40.00 Set an iron post 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{\frac{1}{4}}{S 8 \quad | \quad S 9}$$

1931

No suitable bearing trees available.

Desc. 68 ft. over N.W. slope.

44.80 Wash, 20 lks. wide, course W. Asc. 90 ft. over S.W. slope.


55.15 Spur, bears N.W. Desc. 133 ft. over N.E. slope.

76.90 Wash, 20 lks. wide, course W. Asc. gradual S.W. slope.

Survey of the Subdivision Lines of T. 14 N., R. 3 W. 93

Chains

80.00 Set an iron post 3 ft. long, 2 ins. diam., 26 ins. in the ground, for the cor. of secs. 4, 5, 8, and 9, with brass cap, marked .



1931 from which,

An oak, 8 ins. diam., bears N. 15° E., 127 lks. dist., marked T 14 N R 3 W S 4 B T

An oak, 12 ins. diam., bears S. 81½° E., 253 lks. dist., marked T 14 N R 3 W S 9 B T

An oak, 12 ins. diam., bears S. 15° W., 86 lks. dist., marked T 14 N R 3 W S 8 B T

An oak, 10 ins. diam., bears N. 76¼° W., 154 lks. dist., marked T 14 N R 3 W S 5 B T

Land, mountainous.
Soil, rocky 4th. rate.
Timber, yellow pine, oak, and juniper.
Undergrowth, oakbrush, manzanita, cacti, and catclaw.

N. 89° 55' E., on a random line, bet. secs. 4 and 9.

40.00 Set temp. ¼ sec. cor.

79.94 Fall 12 lks. N. of the cor. of secs. 3, 4, 9, and 10.

Thence,

West, on true line, bet. secs. 4 and 9.

Over mountainous land, through thick timber and undergrowth.

Asc. 56 ft. over N.E. slope.

2.55 Spur, bears N.W. Desc. 111 ft. over S.W. slope.


6.00 Wash, 15 lks. wide, course N.W. Asc. 29 ft. over N.E. slope.

11.00 Spur, bears N.W. Desc. gradual W. slope.

16.35 Wash, 20 lks. wide, course N.E. Asc. 176 ft. over N.E. slope.

26.70 Divide, bears N. and S. From which, U.S.G.S.B.M. bears S. 8½° E., (Marked 7086 ft. above sea level). Desc. 361 ft. over N.W. slope.

39.97 Set an iron post 3 ft. long, 1 in. diam., 18 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the ¼ sec. cor., with brass cap marked



Chains

No suitable bearing trees available.

Continue descent of 441 ft. over N.W. slope.

47.05 Wash, 10 lks. wide, course N.W. Desc. 142 ft. over N.W. slope.

73.20 Wash, 15 lks. wide, course N.W. Asc. 51 ft. over N.E. slope.

75.00 Spur, bears N. Desc. 65 ft. over N.W. slope.

79.94 The cor. of secs. 4, 5, 8, and 9.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, yellow pine, oak, and juniper.

Undergrowth, oakbrush, catclaw, and cacti.

N. 0° 02' W., on true line, bet. secs. 4 and 5.

Over mountainous land, through thick timber and undergrowth.

Over level W. slope.

5.00 Desc. 27 ft. over N.W. slope.

15.70 Wash, 20 lks. wide, course W.

25.90 Wash, 15 lks. wide, course W. Asc. 153 ft. over S.W. slope.

39.60 Spur, bears N.W. Desc. 13 ft. over N.E. slope.

40.00 Set an iron post 3 ft. long, 1 in. diam., 28 ins. in the ground, for the $\frac{1}{4}$ sec. cor. of secs. 4 and 5, with brass cap marked

$\frac{1}{4}$
 S 5 | S 4
 1931

from which,

An oak, 8 ins. diam., bears N. 63° E., 119 lks. dist., marked $\frac{1}{4}$ S 4 B T

An oak, 8 ins. diam., bears S. 42° W., 50 lks. dist. marked $\frac{1}{4}$ S 5 B T

U.S.G.S. B.M. 7086 bears S. 42° 35' E.

Desc. 238 ft. over N.E. slope.


57.70 Wash, 25 lks. wide, course N.W. Desc. 258 ft. over N.W. slope.

83.76 Intersect the S. bdy. of sec. 33, T. 15 N., R. 3 W., at 1.45 chs. E. of the cor. of secs. 32 and 33, which is an iron post 2 ins. diam., firmly set, marked on brass cap and witnessed as described in the official record.

At point of intersection, set an iron post 3 ft. long, 2 ins. diam., 12 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the closing cor. of secs. 4 and 5, with brass cap marked

Survey of the Subdivision Lines of T. 14 N., R. 3 W. 95

Chains



No bearing trees available.

Land, mountainous.
Soil, rocky 4th. rate.
Timber, yellow pine, oak, and juniper.
Undergrowth, oakbrush, catclaw, and cacti.


From the reestablished cor. of secs. 31 and 32, on S. bdy. of Tp., hereinbefore described.

N. 0° 02' W., on true line, bet. secs. 31 and 32.

Over mountainous land, through scattering timber and undergrowth.

Desc. 63 ft. over S.W. slope.

- 7.95 Wash, 20 lks. wide, course S.W. Asc. 141 ft. over S. slope.
- 15.25 Wash, 20 lks. wide, course S.W. Asc. 479 ft. over S.E. slope.
- 22.10 Old mine dump on line.
- 22.55 Trail, bears E. and W.
- 23.50 Trail, bears E. and W.
- 25.95 Same trail, bears N.E. and S.W.
- 34.40 Ridge, bears E. and W. Trail, on same bears E. and W.
Desc. 96 ft. over N.W. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. diam., 24 ins. in the ground for the $\frac{1}{4}$ sec. cor., with brass cap marked



from which,

A yellow pine, 18 ins. diam., bears S. 80° E., 73 lks. dist., marked $\frac{1}{4}$ S 32 B T

A juniper, 30 ins. diam., bears N. 80° W., 75 lks. dist., marked $\frac{1}{4}$ S 31 B T

Desc. 180 ft. over N.W. slope.

- 44.20 Wash, 20 lks. wide, course N.E.
- 47.65 Spur, bears N.E. Desc. 468 ft. over W. slope.
- 68.30 Wash, 20 lks. wide, course N.E. Asc. 16 ft. over E. slope.

Chains

- 71.15 Desc. 30 ft. over N.E. slope.
- 72.55 Wash, 10 lks. wide, course N.E. Asc. 54 ft. over S.E. slope.
- 75.30 Spur, bears N.E. Desc. 70 ft. over N. slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the cor. of secs. 29, 30, 31, and 32, with brass cap marked

T 14 N R 3 W

S 30 | S 29

S 31 | S 32

1931

No bearing trees available.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, yellow pine, oak, and juniper.

Undergrowth, oakbrush, manzanita, and cacti.

N. 89° 58' E., on a random line, bet. secs. 29 and 32.

- 40.00 Set temp.
- $\frac{1}{4}$
- sec. cor.

- 80.08 Fall 5 lks. S. of the cor. of secs. 28, 29, 32, and 33.

Thence,

S. 89° 56' W., on true line, bet. secs. 29 and 32.

Over mountainous land, through scattering timber and undergrowth.

Asc. 54 ft. over N. slope.

- 1.95 Spur, bears N.W. Desc. 670 ft. over S.W. slope.

- 40.04 Set an iron post 3 ft. long, 1 in. diam., 25 ins. in the ground, for the
- $\frac{1}{4}$
- sec. cor., with brass cap marked

 $\frac{1}{4}$ S 29
S 32

1931

No bearing trees available; raise a mound of stone 4 ft. base, 2 ft. high N. of cor.

Desc. 59 ft. over S.W. slope.

- 44.10 Wash, 30 lks. wide, course N.W. Asc. 108 ft. over N.E. slope.

- 49.85 Spur, bears N. Asc. gradual N.E. slope.

- 55.95 Spur, bears N. Desc. 24 ft. over N.W. slope.

- 58.15 Wash, 10 lks. wide, course N. Asc. 35 ft. over N.E. slope.

Survey of Subdivision Lines of T. 14 N., R. 3 W.

Chains	
61.85	Spur, bears N.E. Desc. 9 ft. over N.W. slope.
70.45	Wash, 10 lks. wide, course N.E. Asc. 114 ft. over S.E. slope.
79.00	Spur, bears N.E. Desc. gradual N.W. slope.
80.08	The cor. of secs. 29; 30, 31, and 32.
	<p>Land, mountainous. Soil, rocky 4th. rate. Timber, yellow pine, oak, and juniper. Undergrowth, oakbrush, manzanita, catclaw, and cacti.</p>

	S. 89° 58' W., on a random line, bet. secs. 30 and 31.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
100.94	Fall 14 lks. N. of the cor. of secs. 30 and 31 on W. bdy. of Tp., hereinbefore described.
	Thence,
	N. 89° 53' E., on true line, bet. secs. 30 and 31.
	Over mountainous land, through scattering timber and undergrowth.
	Asc. 355 ft. over S.W. slope to spur.
16.95	Spur, bears S. Desc. 507 ft. over S.E. slope.
31.44	Trail, bears N.E. and S.W.
37.45	Wash, 50 lks. wide, course N. Asc. 309 ft. over W. slope.
45.80	Spur, bears N.W. Asc. gradual W. slope.
52.25	Spur, bears N.W. Desc. 33 ft. over N.E. slope.
55.45	Wash, 10 lks. wide, course N.W. Asc. 74 ft. over N.W. slope.
57.54	Spur, bears N.W. Desc. gradual N.E. slope.
60.94	Set an iron post 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the $\frac{1}{4}$ sec. cor., with brass cap marked
	<p>S 30 $\frac{1}{4}$----- S 31 1931</p>
	No suitable bearing trees available.


Chains	
	Desc. 79 ft. over N.E. slope.
67.55	Wash, 10 lks. wide, course N.W. Asc. 155 ft. over W. slope.
72.50	Spur, bears N.W. Desc. 70 ft. over N.E. slope.
75.70	Wash, 15 lks. wide, course N.W. Asc. 341 ft. over N.W. slope.
90.25	Spur, bears N. Desc. 260 ft. over S.E. slope.
101.15	Wash, 10 lks. wide, course N.E. Asc. 15 ft. over N.W. slope.
100.94	The cor. of secs. 29, 30, 31, and 32. Land, mountainous. Soil, rocky 4th. rate. Timber, yellow pine, oak, and pinion. Undergrowth, oakbrush, manzanita, catclaw, and cacti.

	N. 0° 02' W., on true line, bet. secs. 29 and 30. Over mountainous land, through scattering timber and undergrowth. Desc. 268 ft. over N.W. slope.
2.65	Wash, 20 lks. wide, course N.E.
8.85	Spur, bears N.E. Desc. 113 ft. over N. slope.
13.55	Wash, 20 lks. wide, course N.E. Asc. 24 ft. over S.E. slope.
14.90	Spur, bears N.E. Desc. 97 ft. over N.E. slope.
21.25	Wash, 20 lks. wide, course N.E. Asc. gradual S.E. slope.
23.90	Spur, bears N.E. Desc. 190 ft. over N.E. slope.
33.00	Wash, 25 lks. wide, course N.W. Asc. 96 ft. over S.W. slope.
40.00	Set an iron post 3 ft. long, 1 in. diam., 24 ins. in the ground, for the $\frac{1}{4}$ sec. cor., with brass cap marked $\frac{1}{4}$ S 30 S 29 1931 No bearing trees available; raise a mound of stone 4 ft. base, 2 ft. high W. of cor. Asc. 149 ft. over S.W. slope.
47.00	Spur, bears W. Desc. 238 ft. over N. slope.
58.55	Iron Springs wash, 50 lks. wide, course S.W. Asc. 226 ft. over S. slope.
80.00	Set an iron post 3 ft. long, 2 ins. diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for

Survey of the Subdivision Lines of T. 14 N., R. 3 W. 199

Chains

the cor. of secs. 19, 20, 29, and 30, with brass cap marked



1931

No suitable bearing trees available.

Land, mountainous.
 Soil, rocky 4th. rate.
 Timber, yellow pine, oak, and pinion.
 Undergrowth, oakbrush, manzanita, catclaw, and cacti.

N. 89° 56' E., on a random line, bet. secs. 20 and 29.

40.00 Set temp. 1/4 sec. cor.

80.08 Fall 18 lks. N. of the cor. of secs. 20, 21, 28, and 29.

Thence,

N. 89° 56' W., on true line, bet. secs. 20 and 29.

Over mountainous land, through scattering timber and undergrowth.

Asc. 14 ft. over S.E. slope.

2.40 Spur, bears S. Desc. 124 ft. over S.W. slope.

12.75 Wash, 14 lks. wide, course S.W. Asc. 114 ft. over S.E. slope.


15.20 McKinley Mine house, bears S. about 5 chs. distant.

21.15 Spur, bears S.W. Desc. 182 ft. over S.W. slope.

32.40 Iron Springs wash, 50 lks. wide, course N.W.

39.00 Spur, bears N. Desc. 24 ft. over N.W. slope.

40.04 Set an iron post 3 ft. long, 1 in. diam., 18 ins. in the ground to bedrock, in a mound of stone to top, for the 1/4 sec. cor. of secs. 20 and 29, with brass cap marked



1931

from which,

A willow, 10 ins. diam., bears N. 40° W., 230 lks. dist., marked 1/4 S 20 B T

A willow, 10 ins. diam., bears S. 73° W., 263 lks. dist., marked 1/4 S 29 B T

Desc. 32 ft. over N.W. slope.

41.90 Iron Springs wash, 50 lks. wide, course S.W. Asc. 72 ft. over S.E. slope.

50.10 Spur, bears S.W. Desc. 35 ft. over S.W. slope.

52.60 Wash, 10 lks. wide, course S.W. Asc. 35 ft. over S.E. slope.

100 Survey of the Subdivision Lines of T. 14 N., R. 3 W.

Chains

- 55.10 Spur, bears S. Desc. 64 ft. over S.W. slope.
- 60.20 Wash, 15 lks. wide, course S. Asc. 77 ft. over S.E. slope.
- 64.70 Spur, bears S. Desc. 110 ft. over S.W. slope.
- 75.70 Wash, 10 lks. wide, course S. Asc. 58 ft. over S.E. slope.
- 78.10 Trail, bears N. and S.
- 80.08 The cor. of secs. 19, 20, 29, and 30.

Land, mountainous.
 Soil, rocky 4th. rate.
 Timber, yellow pine, oak, and juniper.
 Undergrowth, oakbrush, catclaw, and cacti.

S. 89° 53' W., on a random line, bet. secs. 19 and 30.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

100.86 Fall 15 lks. N. of the cor. of secs. 19 and 30 on W. bdy. of Tp., hereinbefore described.

Thence,

N. 89° 48' E., on true line, bet. secs. 19 and 30.

Over mountainous land, through scattering timber and undergrowth.

Asc. 69 ft. over N.W. slope.

4.90 Spur, bears S.W. Desc. 10 ft. over S.E. slope to track.

6.50 Santa Fe Ry. track, bears N.W. and S.E.

17.55 Santa Fe Track, bears N.E. and S.W. Asc. 80 ft. over S.W. slope.

27.60 Wash, 20 lks. wide, course N.W. Asc. 101 ft. over S.W. slope.

34.75 Wash, 20 lks. wide, course S.W. Asc. 64 ft. over W. slope.

41.05 Wash, 10 lks. wide, course N.W. Asc. 267 ft. over W. slope.

54.80 Spur, bears N.W. Desc. 44 ft. over N.E. slope.

59.70 Wash, 10 lks. wide, course N.W. Asc. 29 ft. over N.W. slope.

60.86 Set an iron post 3 ft. long, 1 in diam., 12 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S. 19
 S 30
 1931

No bearing trees available:

Survey of the Subdivision Lines of T. 14 N., R. 3 W. 101

Chains	
	Continue ascent of 69 ft. over N.W. slope.
65.10	Spur, bears S.W. Desc. 204 ft. over S.E. slope.
76.50	Wash, 10 lks. wide, course S.W. Asc. 136 ft. over S.W. slope.
81.15	Spur, bears S.W. Desc. 15 ft. over S.E. slope.
88.55	Spur, bears S.E. Desc. 136 ft. over N.E. slope.
100.86	The cor. of secs. 19, 20, 29, and 30. Land, mountainous. Soil, rocky 4th. rate. Timber, yellow pine, pinion, and oak. Undergrowth, oakbrush, manzanita, catclaw, and cacti.


	N. 0° 02' W., on true line, bet. secs. 19 and 20. Over mountainous land, through scattering timber and undergrowth. Desc. 12 ft. over E. slope.
2.50	Wash, 50 lks. wide, course S.E. Asc. 242 ft. over S.E. slope to ridge.
12.15	Enter wash, 10 lks. wide, course S.E. continue up same.
17.15	Leave wash, from N.E.
27.05	Ridge, bears E. and W. Desc. 135 ft. over N.E. slope.
39.45	Wash, 10 lks. wide, course N.W. Asc. 12 ft. over S.W. slope.
40.00	Set an iron post 3 ft. long, 1 in. diam., 18 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the 1/4 sec. cor., with brass cap marked $\frac{1}{4}$ S 19 S 20 1931 No bearing trees available. Asc. gradual S.W. slope.
40.70	Spur, bears N.W. Desc. 99 ft. over N. slope.
43.70	Wash, 15 lks. wide, course N.W. Asc. 62 ft. over S.W. slope.
55.45	Wash, 15 lks. wide, course S.W. Asc. 22 ft. over S.W. slope.
60.10	Spur, bears N.W. Desc. 82 ft. over N.W. slope.
64.45	Wash, 10 lks. wide, course N.W. Asc. 16 ft. over S.W. slope.

Chains

69.30 Spur, bears N.W. Desc. 34 ft. over N.W. slope.

76.70 Old road, bears N.E. and S.W.

80.00 Set an iron post 3 ft. long, 2 ins. diam., 16 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the cor. of secs. 17, 18, 19, and 20, with brass cap marked



1931

No suitable bearing trees available.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, oak, and pinion.

Undergrowth, oakbrush, manzanita, catclaw, and cacti.

S. 89° 56' E., on a random line, bet. secs. 17 and 20.

40.00 Set temp. 1/4 sec. cor.

79.94 Fall 32 lks. S. of the cor. of secs. 16, 17, 20, and 21.

Thence,

S. 89° 50' W., on true line, bet. secs. 17 and 20.

Over mountainous land, through scattering timber and undergrowth.

Desc. 64 ft. over S.W. slope.

3.70 Wash, 20 lks. wide, course N.W. Asc. 22 ft. over N.E. slope.

8.00 Old road, bears N.W. and S.E.

8.80 Spur, bears N.W. Desc. 25 ft. over W. slope.


11.85 Wash, 15 lks. wide, course N. Asc. 30 ft. over N.E. slope.

32.95 Wash, 15 lks. wide, course N. Asc. 30 ft. over N.E. slope.

34.55 Spur, bears N. Desc. 21 ft. over N.W. slope.

36.85 Asc. 26 ft. over N.E. slope.

39.97 Set an iron post 3 ft. long, 1 in. diam., 26 ins. in the ground for the 1/4 sec. cor., with brass cap marked



1931

from which,

An oak, 5 ins. diam., bears N. 26° W., 26 lks. dist., marked 1/4 S 17 B T

Survey of the Subdivision Lines of T. 14 N., R. 3 W. 103

Chains

an oak, 4 ins. diam., bears S. 8° W., 7 lks. dist., marked B T only.

Continue ascent of 28 ft. over N.E. slope.

44.05 Spur, bears N.W. Desc. 100 ft. over N.W. slope.

51.30 Wash, 10 lks. wide, course N. Asc. gradual E. slope.

59.65 Spur, bears N.W. Desc. 82 ft. over W. slope.

63.45 Wash, 20 lks. wide, course N. Asc. 30 ft. over N.E. slope.

65.90 Spur, bears N.W. Desc. 82 ft. over W. slope.

69.15 Wash, 10 lks. wide, course N. Asc. 9 ft. over N.E. slope.

72.25 Spur, bears N.W. Desc. 25 ft. over N.W. slope.

74.25 Wash, 20 lks. wide, course N. Asc. 25 ft. over N.E. slope.

78.05 Wash, 10 lks. wide, course N. Asc. 16 ft. over N.E. slope.

79.94 The cor. of secs. 17, 18, 19, and 20.

Land, mountainous.
Soil, rocky 4th. rate.
Timber, oak, willow, and pinion.
Undergrowth, oakbrush, manzanita, catclaw and cacti.

S. 89° 48' W., on a random line, bet. secs. 18 and 19.

40.00 Set temp. 1/4 sec. cor.

100.80 Fall 20 lks. S. of the cor. of secs. 18 and 19 on W. bdy. of Tp., hereinbefore described.

Thence,

N. 89° 55' E., on true line, bet. secs. 18 and 19.

Over mountainous land, through scattering timber and undergrowth.

Desc. 191 ft. over S.E. slope.

17.70 Wash, 30 lks. wide, course S.W. Asc. 159 ft. over N.W. slope.

41.45 Spur, bears N. Desc. 30 ft. over N.E. slope.

47.60 Wash, 10 lks. wide, course N.W. Asc. 52 ft. over S.W. slope.

60.80 Set an iron post 3 ft. long, 1 in. diam., 16 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the 1/4 sec. cor., with brass cap marked

1/4 S 18

S 19

Chains	
	No bearing trees available.
	Asc. 118 ft. over W. slope.
66.15	Knoll on spur from S. Desc. 85 ft. over E. slope.
71.00	Wash, 10 lks. wide, course N.W. Desc. 85 ft. over E. slope.
72.80	Spur, bears N.W. Desc. 17 ft. over N.E. slope.
74.85	Wash, 10 lks. wide, course N.W. Asc. 34 ft. over S.W. slope.
77.85	Spur, bears N.W. Asc. 61 ft. over gradual N.W. slope.
85.95	Spur, bears N.W.
91.80	Santa Fe R.R. track, bears N.E. and S.W.
94.60	Telephone line, bears N.E. and S.W.
95.10	Spur, bears N.W. Desc. 31 ft. over E. slope.
96.85	Wash, 5 lks. wide, course N.W. Asc. 58 ft. over W. slope.
100.80	The cor. of secs. 17, 18, 19, and 20.


Land, mountainous.
 Soil, rocky 4th. rate.
 Timber, oak, willow and pinion.
 Undergrowth, oakbrush, manzanita, cacti, and catclaw.

N. 0° 02' W., on true line, bet. secs. 17 and 18.

Over mountainous land, through scattering timber and dense undergrowth.

Desc. 87 ft. over N.W. slope.

1.95	Telephone line, bears E. and W.
2.75	Santa Fe Ry. track, bears N.E. and S.W.
6.05	Wash, 30 lks. wide, course S.W. Asc. 86 ft. over S. slope.
20.95	Spur, bears S.W. Desc. 34 ft. over N.W. slope.
29.25	Wash, 5 lks. wide, course S.W. Asc. 39 ft. over S.W. slope.
40:00	Set an iron post 3 ft. long, 1 in. diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor., with brass cap marked



1931

from which,

an oak, 8 ins. diam., bears N. 33° E., 61 lks. dist., marked $\frac{1}{4}$ S 17 B T

A juniper, 12 ins. diam., bears N. 13° W., 285 lks. dist., marked $\frac{1}{4}$ S 18 B T

Survey of the Subdivision Lines of T. 14 N., R. 3 W. 105

Chains

- 56.60 Wash, 15 lks. wide, course S.W. Asc. 73 ft. over S.W. slope.
- 72.95 Road, bears N.W. and S.E.
- 76.80 Road, bears N.E. and S.W.
- 79.90 Telephone line, bears E. and W.
- 80.00 Set an iron post 3 ft. long, 2 ins. diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for cor. of secs. 7, 8, 17, and 18, with brass cap marked

T 14 N	R 3 W
S 7	S 8
S 18	S 17

1931 from which,

A juniper, 8 ins. diam., bears S. 20° E., 158 lks. dist., marked T 14 N R 3 W S 17 B T

No other bearing trees available.

Land, mountainous.
 Soil, rocky 4th. rate.
 Timber, oak, juniper, and pinion.
 Undergrowth, oakbrush, manzanita, catclaw, and cacti.

- N. 89° 50' E., on a random line, bet. secs. 8 and 17.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.08 Fall 5 lks. N. of the cor. of secs. 8, 9, 16, and 17.
 Thence,
 S. 89° 52' W., on true line, bet. secs. 8 and 17.
 Over mountainous land, through scattering timber and undergrowth.
 Desc. 89 ft. over S.W. slope.
- 10.70 Wash, 20 lks. wide, course N.W. Asc. 22 ft. over N.E. slope.
- 14.60 Spur, bears N.W. Desc. 179 ft. over W. slope.
- 29.45 Wash, 40 lks. wide, course N, Desc. 54 ft. over W. slope.
- 40.04 Set an iron post 3 ft. long, 1 in. diam., 22 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 8
S 17

1931

Chains	
	No suitable bearing trees available.
	Continue descent of 111 ft. over W. slope.
80.08	The cor. of secs. 7, 8, 17, and 18.
	Land, mountainous. Soil, rocky 4th. rate. Timber, oak, juniper, and pinion. Undergrowth, oakbrush, manzanita, cacti, and catclaw.

	S. 89° 55' W., on a random line, bet. secs. 7 and 18.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
100.70	Run 15 lks. S. of the cor. of secs. 7 and 18, on W. bdy. of Tp., hereinbefore described.
	Thence, East, on true line, bet. secs. 7 and 18.
	Over mountainous land, through scattering timber and undergrowth.
	Asc. 251 ft. over W. slope.
22.10	Spur, bears N. Desc. 99 ft. over N.E. slope.
27.70	Wash, 20 lks. wide, course N.W. Asc. 166 ft. over N.W. slope.
37.70	Spur, bears N.W. Desc. 78 ft. over N.E. slope.
41.15	Wash, 20 lks. wide, course N. Asc. 66 ft. over W. slope.
44.40	Spur, bears N.W. Desc. 45 ft. over N.E. slope.
48.80	Wash, 20 lks. wide, course N.W. Asc. 71 ft. over W. slope.
52.15	Spur, bears N.W. Desc. 144 ft. over N.E. slope.
60.70	Set an iron post $\frac{3}{4}$ ft. long, 1 in. diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S 7}{S 18}$
	1931 from which,
	A juniper, 18 ins. diam., bears N. 53° E., 87 lks. dist., marked $\frac{1}{4}$ S 7 B T
	A juniper, 30 ins. diam., bears S. 13° W., 93 lks. dist., marked $\frac{1}{4}$ S 18 B T
61.55	Wash, 30 lks. wide, course N.W. Asc. 86 ft. over S.W. slope.
92.45	Road, bears N.W. and S.E.
98.96	Telephone line, bears E. and W.
100.70	The cor. of secs. 7, 8, 17, and 18.

Survey of the Subdivision Lines of T. 14 N., R. 3 W. 107.

Chains

Land, mountainous.
Soil, rocky 4th. rate.
Timber, oak, and juniper.
Undergrowth, oakbrush, manzanita, catclaw, and cacti.

N. 0° 02' W., on true line, bet. secs. 7 and 8.

Over mountainous land, through scattering timber and dense undergrowth.

Desc. 46 ft. over gradual N.W. slope.

13.85 Wash, 15 lks. wide, course W. Asc. 15 ft. over S.W. slope.

15.60 Spur, bears S.W. Desc. 18 ft. over N.W. slope.


18.75 Wash, 10 lks. wide, course W. Asc. 30 ft. over S.W. slope.

25.15 Spur, bears S.W. Desc. 35 ft. over N. slope.

29.85 Wash, 20 lks. wide, course S.W. Asc. 118 ft. over S.E. slope.

37.30 Spur, bears S.W. Desc. 23 ft. over S.W. slope.

40.00 Set an iron post 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the 1/4 sec. cor., with brass cap marked




1931

No bearing trees available.

Desc. 78 ft. over rolling N. slope.

71.00 Wash, 10 lks. wide, course W.

80.00 Set an iron post 3 ft. long, 2 ins. diam., 26 ins. in the ground, for the cor. of secs. 5, 6, 7, and 8, with brass cap marked



1931

from which,

A hackberry, 13 ins. diam., bears N. 43° E., 31 lks. dist., marked T 14 N R 3 W S 5 B T

An oak, 4 ins. diam., bears S. 30° E., 40 lks. dist., marked T 14 N R 3 W S 8 B T


A walnut, 13 ins. diam., bears N. 18° W., 77 lks. dist., marked T 14 N R 3 W S 6 B T

A juniper, 14 ins. diam., bears S. 22° W., 92 lks. dist., marked T 14 N R 3 W S 7 B T

Chains

Land, mountainous.
Soil, rocky 4th. rate.
Timber, oak and juniper.
Undergrowth, oakbrush, catclaw, and cacti.

- 40.00 N. 89° 52' E., on a random line, bet. secs. 5 and 8.
Set temp. $\frac{1}{4}$ sec. cor.
- 80.16 Fall 7 lks. N. of the cor. of secs. 4, 5, 8, and 9.
Thence,
S. 89° 55' W., on true line, bet. secs. 5 and 8.
Over mountainous land, through scattering timber and undergrowth.
Desc. 99 ft. over N.W. slope.
- 18.90 Wash, 10 lks. wide, course N.W. Continue descent of 27 ft. over N.W. slope.
- 33.70 Wash, 10 lks. wide, course N. Asc. 32 ft. over N.E. slope.
- 39.15 Spur, bears N. Desc. 21 ft. over N.W. slope.
- 40.08 Set an iron post 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the $\frac{1}{4}$ sec. cor., with brass cap marked



1931

No bearing trees available.

- 54.75 Continue descent of 148 ft. over N.W. slope.
- 58.85 Wash, 10 lks. wide, course N. Asc. 34 ft. over E. slope.
- 58.85 Spur, bears N. Desc. 122 ft. over W. slope.
- 78.40 Wash, 20 lks. wide, course N.W. Asc. slight N.E. slope.
- 80.16 The cor. of secs. 5, 6, 7, and 8.

Land, mountainous.
Soil, rocky 4th. rate.
Timber, oak, walnut, and juniper.
Undergrowth, oakbrush, catclaw, and cacti.

- 40.00 West, on a random line, bet. secs. 6 and 7.
Set temp. $\frac{1}{4}$ sec. cor.
- 100.60 Intersect the cor. of secs. 6 and 7, on W. bdy. of Tp., hereinbefore described.
Thence,
East, on true line, bet. secs. 6 and 7.


Survey of the Subdivision Lines of T.14 N., R. 3 W. 109

Chains	
	Asc. 150 ft. over S.W. slope.
6.05	Wash, 15 lks. wide, course W. Asc. 116 ft. over S.W. slope.
19.35	Head of wash, course N.W. Asc. 101 ft. over S.W. slope.
29.15	Road, bears N.W. and S.E.
37.45	Road bearing E. and W. is about 20 lks. S. of line.
60.60	Set an iron post 3 ft. long, 1 in. diam., 24 ins. in the ground for the $\frac{1}{4}$ sec. cor., with brass cap marked
	$\begin{array}{r} \frac{1}{4} \text{ S } 6 \\ \hline \text{S } 7 \end{array}$
	1931
	No bearing trees available.
	Asc. 24 ft. over gradual S.W. slope.
73.75	Ridge, bears N.W. and S.E. Desc. 40 ft. over E. slope.
80.55	Wash, 20 lks. wide, course N.W. Over rolling N. slope.
84.20	Road, bears N. and S.
96.65	Wash, 20 lks. wide, course N.W.
100.60	The cor. of secs. 5, 6, 7, and 8.
	Land, mountainous, and rolling. Soil, rocky 4th. rate. Timber, oak and juniper. Undergrowth, oakbrush, catclaw, and cacti.

	N. 0° 02' W., on true line, bet. secs. 5 and 6.
	Over mountainous land, through scattering timber and dense undergrowth.
	Desc. gradual N.E. slope.
1.00	Wash, 30 lks. wide, course N.W. Asc. 49 ft. over S.W. slope.
4.95	Spur, bears N.W. Desc. 69 ft. over N.W. slope.
20.95	Wash, 1 ch. wide, course W. Asc. 39 ft. over S.W. slope.
22.30	Wire fence, bears E. and W.
31.55	Wash, 20 lks. wide, course S.W. Asc. 56 ft. over S.W. slope.
40.00	Set an iron post 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the $\frac{1}{4}$ sec. cor., with brass cap marked

110 Survey of the Subdivision Lines of T. 14 N., R. 3 W.

Chains



1931

No bearing trees available.

Continue ascent of 24 ft. over S.W. slope.

42.25 Spur, bears W. Desc. 88 ft. over N.E. slope.

53.90 Wash, 20 lks. wide, course W. Asc. 112 ft. over S. slope.

58.10 Wire fence, bears E. and W.


61.95 Spur, bears S.E. Desc. 114 ft. over N.E. slope.

73.95 Trail, bears N.E. and S.W.

76.75 Wash, 30 lks. wide, course W. Asc. 64 ft. over S. slope.

83.72 Intersect the S. bdy. of sec. 32, T 15 N., R. 3 W., at 1.29 chs. east of the cor. of secs. 31 and 32, which is an iron post 2 ins. diam., firmly set, with brass cap marked and witnessed as described in the official record.

At intersection, set an iron post 3 ft. long, 2 ins. diam., 22 ins. in the ground to bedrock, deposit a stone marked with a cross (X) at base of post, in a mound of stone to top, for the closing cor. of secs. 5 and 6, with brass cap marked



1931

No bearing trees available.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, oak, willow, and juniper.

Undergrowth, oakbrush, catclaw, and cacti.

Survey of Traverse in section 15., T. 14 N., R. 3 W. 111

Chains

The following notes describe a traverse in sec. 15, T. 14 N., R. 3 W., to locate roads and springs.

From a point 10 lks. N. of a good spring of living water in sec. 15, thence

3.17 N. 77° W.,
A.P. 1 in center of wood and picnic road which terminates about 1/4 of a mile N.W. of this point. Thence,

1.94 S. 11° E., along road to
A.P. 2. Another small spring, bears W. about 3 chs. dist.,
Thence,

5.98 S. 33° 30' W., along road to
A.P. 3. Thence,

4.80 S. 54° W., along road to
A.P. 4. Thence,

2.12 S. 5° E., along road to
A.P. 5. Thence,

6.02 S. 43° E., along road to
A.P. 6. This point is at intersection of branch road with Iron Springs-Prescott Highway, which bears E. and W.
Thence,

4.65 S. 20° 30' E., along road to
A.P. 7. Thence,

5.40 S. 14° 30' W.,
A.P. 8. Thence,

1.53 East, along sec. line bet. secs. 15 and 22 to
Intersect reestablished 1/4 sec. cor. hereinbefore described.

The computed bearing and distance from spring to 1/4 sec. cor. is S. 8° 36' W., 25.30 chs.

Description of U. S. G. S. B.M. 7086.

This monument is a brass cap 4 ins. in diam., cemented in face of exposed ledge on top of Tent or Little Granite Mountain in sec. 9, T. 14 N., R. 3 W., marked

" U.S.G.S. Elev. above sea level 7086 ft."

Iron Springs Traverse.

112

(Ties to Springs and improvements in secs. 15, 16, 21 and 22.)

Chains	<p>The following notes describe traverses made in secs. 15, 16, 21, and 22, T. 14 N., R. 3 W., within the grounds of the Iron Springs Outing Club to locate springs, houses and other improvements.</p> <p>Traverse begins at the northwest cor. of the tennis court, related to the cor. of secs. 15, 16, 21, and 22 as hereinafter described.</p> <p>Thence, N. 35° W., along road, to 2.80 A.P. 1, on S. edge of road, which bears N.W. and S.E. From which, A house (a) bears N. 8° W. A house (b) bears N. 25° W.</p> <p>Thence, N. 74½° W., leaving road, to 1.72 A.P. 2, identical with the reestablished cor. of secs. 15, 16, 21, and 22, hereinbefore described. From cor., Same house (a) bears N. 47° E., Same house (b) bears N. 12° E.</p> <p>Thence, N. 0° 02' W., along sec. line, bet. secs. 15 and 16 to 1.30 A.P. 3, on S. edge of above noted road. From which, A house (a) bears N. 52° W. A house (b) bears N. 64° W.</p> <p>Thence, N. 83° 40' W., along road; at 2.50 chs. a house bears S. along edge of road; at 4.36 A.P. 4 in road, from which, Same house (a) bears N. 61° E. Same house (b) bears N. 53° E. West end of house, bears S. 27° W., 97 lks. dist.</p> <p>Thence, S. 89° W., along road, to 3.26 A.P. 5, in center of intersection of roads from E., S. 73° W., and S. From which, A house, numbered "1" bears S. 88½° W., 2.64 chs. dist. A house, bears S. 44° W., 1 ch. dist. A house, numbered "82" bears S. 25° E., 87 lks. dist.</p>
	<p>-----</p> <p><u>Side Traverse.</u></p>
	<p>From A.P. 5,</p> <p>Thence, S. 14° W., along road; at 1.20 chs. wash, 30 lks. wide, course W., at 2.70 A.P. 1, from which, A house, bears S. 15° E., 90 lks. dist. A house, bears S. 11° E., 164 lks. dist.</p> <p>Thence, S. 70° W., along road to 1.57 A.P. 2, from which, A house, numbered "61" bears S. 32° E., 260 lks. dist. A house, numbered "60" bears S. 16° E., 146 lks. dist. A house, numbered "59" bears S. 17° W., 47 lks. dist. A house, numbered "58" bears S. 77° W., 157 lks. dist. A garage, bears N. 84° W., 214 lks. dist.</p>
	<p>-----</p> <p>Return to A.P. 5.</p> <p>Thence, S. 73½° W., along road to 3.93 A.P. 6.</p> <p>Thence, N. 51° W., along road to 3.20 A.P. 7, from which,</p>

Iron Springs Traverse, in secs. 15, 16, 21, and 22. 113

Chains

A house, bears N. 65° E., 90 lks. dist.
A house, bears N. 27° E., 140 lks. dist.
A house, bears N. 10° E., 205 lks. dist.
A house, bears N. 4° E., 250 lks. dist.
Covered spring and reservoir, bears South, 83 lks. dist.

2.29 Thence, N. 31° W., along road.
A.P. 8, from which,
A workhouse, bears S. 48° W., 76 lks. dist.
A house, bears N. 19° E., 188 lks. dist.
Pavillion, bears N. 50° W., 237 lks. dist.

1.57 Thence, N. 39° W., along road.
A.P. 9, from which,
Store, bears S. 30° W., 86 lks. dist.
Storage water tank on high hill, bears S. 9° E., V.A.
; plus 12°.
Roads branch here, one bears Westerly to western
entrance of Club grounds and one southwesterly to
Santa Fe R.R. depot.

4.89 Thence, S. 59° W., along road, to
A.P. 10, from which,
Same water tank on hill, bears S. 27° 20' E.

3.78 Thence, S. 48¹/₂° W., along road to
A.P. 11, from which,
Santa Fe R.R. depot, bears S. 74° W., 3.05 chs. dist.
A house, (a) bears N. 12° E.
A house, (b) bears East.

2.59 Thence, S. 72° E., along branch road to
A Point from which,
A pump house, over spring, bears N. 48° W., 38 lks. dist.
A house, same (a) bears N. 27° W.,
A house, same (b) bears N. 64° E.,
A house, (c) bears N. 12° W.
A house (d) bears North.

Continue same course along road.

.96 A.P. 12, from which,
A house, same (c) bears N. 20° W.,
A house, same (d) bears N. 12° W.

2.13 Thence, S. 2¹/₂° W., along road to
A.P. 13, from which,
A house, bears S. 64° W., 130 lks. dist.
A house, bears S. 7° W., 153 lks. dist.
A house, bears S. 20° E., 44 lks. dist.
A house, bears N. 54° E., 150 lks. dist.

1.86 Thence, S. 82° E., along road, to
A.P. 14, from which,
A house, bears S. 44° E., 150 lks. dist.
A house, bears S. 16° E., 210 lks. dist.
A house, bears N. 22° E., (a).

2.60 Thence, N. 70° E., along road to
A.P. 15, from which,
A house, same (a) bears N. 50° W.
A house, bears S. 18° E., 100 lks. dist.
A house, bears S. 30° W., 200 lks. dist.
A house, bears S. 12° E., 250 lks. dist.
A house, numbered "55" bears North, 90 lks. dist.

114. Ties to Springs and Improvements in secs. 15, 16, 21, and 22.

Chains

1.74 Thence, N. 80° E., along road to
A.P. 16, 300 chs.,

2.27 Thence, S. 6° W., along road to
A.P. 17, from which,
A house, bears S. 30° W., 110 lks. dist.
A house, numbered "57" bears S. 70° E., 63 lks. dist.
A house, bears S. 25° E., 255 lks. dist.

Retracement of Part of the Bdy. of "Ellen No. 1" pat.
mining claim, Min. Sur. No. 2424, in
secs. 34 and 35, T. 14 N., R. 3 W.

From Cor. No. 1 of the "Patsy" lode mining claim, which is
a stone marked and witnessed as described in the off-
icial record, thence,

S. $61^{\circ} 08'$ E., on random line, on the N.E. side line
of the "Ellen No. 1", patented lode mining claim.

11.60 Intersect Cor. No. 1 of "Ellen No. 1" claim.

True course and dist. for this part of "Ellen No. 1" bdy.,
are therefore, S. $62^{\circ} 20'$ E., 11.57 chs.

Final Field Test of Buff Transit
No. 16,724
and

Young and Sons Transit No. 8540.

Sept. 17, 1931: on same meridian as described on page 3
hereof, examine the adjustments of the transit and
find no existing errors, then test the workings of
the solar apparatus as follows:

At 9h. 00m., a.m., app. t., set of $34^{\circ} 35'$ N., on lat. arc,
 $2^{\circ} 28'$ N., on decl. arc and determine a meridian with
the the solar which agrees within 1' of the true mer-
idian.

At app. noon, with the lat. arc unchanged, observe the sun
on the meridian. The resultant reading of the decl.
arcs is $2^{\circ} 25'$ N., which agrees with the computed
declination of the sun.

At 3h. 00m., p.m., app. t., with lat. arcs unchanged, set
off $2^{\circ} 21'$ N., on the decl. arc and determine a mer-
idian with the solar which agrees with the true mer-
idian.

As all of the obsns. taken during the usual hours of solar
work agree within 1' of the true meridian, conclude
that the adjustments of the instruments have been
maintained during the surveys described in the fore-
going notes.

General Description.

Land; mountainous in character, constituting a part of the Bradshaw range extending N. and S. through the Tp. Elevation of the Tp. above sea level ranges from 5,500 ft. to 8,000 ft, with the lower stretches along the East and West boundaries. Drainage is generally easterly and southwesterly.

Soil; on the slopes it is principally decomposed granite, mixed with lumpy black coarse loam, with average depth of 18 ins. to bedrock. In draw bottoms a black loam soil is found suitable for the raising of fruits and grains.

Timber; there is a heavy growth of timber over the greater part of the Tp. The predominating timber species are the yellow pine, oak, juniper, pinion, while along some of the larger creek and canyon bottoms ash, willow, walnut and cottonwood are found. No sawmills are operating in this township.

Mineral; much evidence of mineral was noted over the Tp. Mining improvements are extensive, though no active operations are going on at this time. In past years the mines in the Tp. were quite active, the largest producer being the Derby, in secs 28 and 33. Gold in small quantities is being panned on some of the creeks.

Water; Miller, Willow, Spence Creeks on the east of the Bradshaw divide and Iron Springs Wash, on the west side carry small streams of water. Granite Basin in secs. 2, 3, 10, and 11 is drained by a wash, with small stream of water in same, which flows out of the Tp. in a Northeasterly direction in sec. 1.

Settlement; the largest settlement is at Iron Springs in secs. 15, 16, 21, and 22, where there is a summer colony located with about 70 houses. Elsewhere settlers and miners have located, chiefly in secs. 23, 24, 25, 26, 29, 28, and 34.

Roads; the Skull Valley-Prescott Highway crosses the central part of Tp., in an E. and W. direction. Numerous other fair and poor roads traverse the Tp. The Santa Fe. R.R. crosses the Tp., easterly and westerly with a station at Iron Springs.

General; the lands are suitable for grazing, mining and recreational purposes. All land is within the Prescott National Forest and the area North of the highway and east of the divide is within a Game Preserve.

CERTIFICATE OF UNITED STATES SURVEYOR.

118

I, Benjamin J. Kinsey, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer, for Group 157, Arizona bearing date of the 16th day of April, 1930, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, retraced all those parts or portions of the NE. side line of "Ellen No.1" pat. lode mining claim, Min.Surv.No.2424

resurveyed all those parts or portions of the South and East boundaries, and Subdivision lines of T.14 N., R.3 W. and surveyed all those parts or portions of the West boundary, and Subdivision lines Boundaries of Tracts Nos. 37 to 45, both inclusive, and Traverses to springs, houses & other improvements in Iron Springs.

Township 14 North, Range 3 West of the Gila and Salt

River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes and by diagram on page 2 hereof as having been executed by me, and under my direction; and that all the corners of said retracement, resurvey and survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer, for Group 157, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes, such retracement, resurvey and survey.

Place: Phoenix, Arizona. Date: July 27, 1932.

Benjamin J. Kinsey U. S. Surveyor

APPROVAL.

OFFICE OF U. S. SUPERVISOR OF SURVEYS,

Denver, Colo., January 26, 1935

The foregoing field notes of the retracement of Part of NE. side line of "Ellen No.1" pat. lode mining claim, Min.Surv.No.2424. of the resurvey of the South & East boundaries, and Part of the Subdivision lines of Township 14 North, Range 3 West. and of the survey of the West boundary, and Part (Completion) of Subdivision lines, Boundaries of Tracts Nos. 37 to 45, both inclusive, and Traverses to springs, houses & other improvements in Iron Springs

Township 14 North, Range 3 West

of the Gila and Salt River Base and Meridian, in the State of

executed by Benjamin J. Kinsey, U.S. Surveyor

under his special instructions dated April 16, 1930, for Group 157, Arizona, has critically examined, and the necessary corrections and explanations made, the said field notes, and the retracements, resurveys & surveys they describe, are hereby approved.

U. S. Supervisor of Surveys

I certify that the foregoing transcript of the field notes of the above described surveys in, has been correctly copied from the original notes on file in this office.

U. S. Supervisor of S