

4-379  
Book "C"

BOOK 4031

# FIELD NOTES

~~OF THE SURVEY OF THE~~

OF THE RESURVEY OF THE

WEST BOUNDARY of TOWNSHIP 14 NORTH, RANGE 10 EAST.

and OF THE RESURVEY OF THE

SOUTH BOUNDARY of TOWNSHIP 15 NORTH, RANGE 9 EAST

and OF THE SURVEY OF THE

WEST BOUNDARY and

SUBDIVISION LINES of

Township 14 North, Range 9 East

Of the Gila and Salt River Meridian,

In the State of ARIZONA

## EXECUTED BY

Chas. W. Devendorf, U.S. Cadastral Engineer

and

Benj. J. Mollette, U.S. Transitman

*In the capacity of U. S. Surveyor<sup>s</sup>, under Special Instructions dated March 20, 1934, issued by the District Cadastral Engineer to govern surveys included in Group No. 185, Arizona, which were approved by the Commissioner of the General Land Office, March 31, 1934, and Assignment Instructions dated May 10 & 15 1934.*

Resurvey and Survey commenced July 11, 1934.

Resurvey and Survey completed August 7, 1934.


4031

4031

1A

BOOK 4031

# INDEX DIAGRAM.

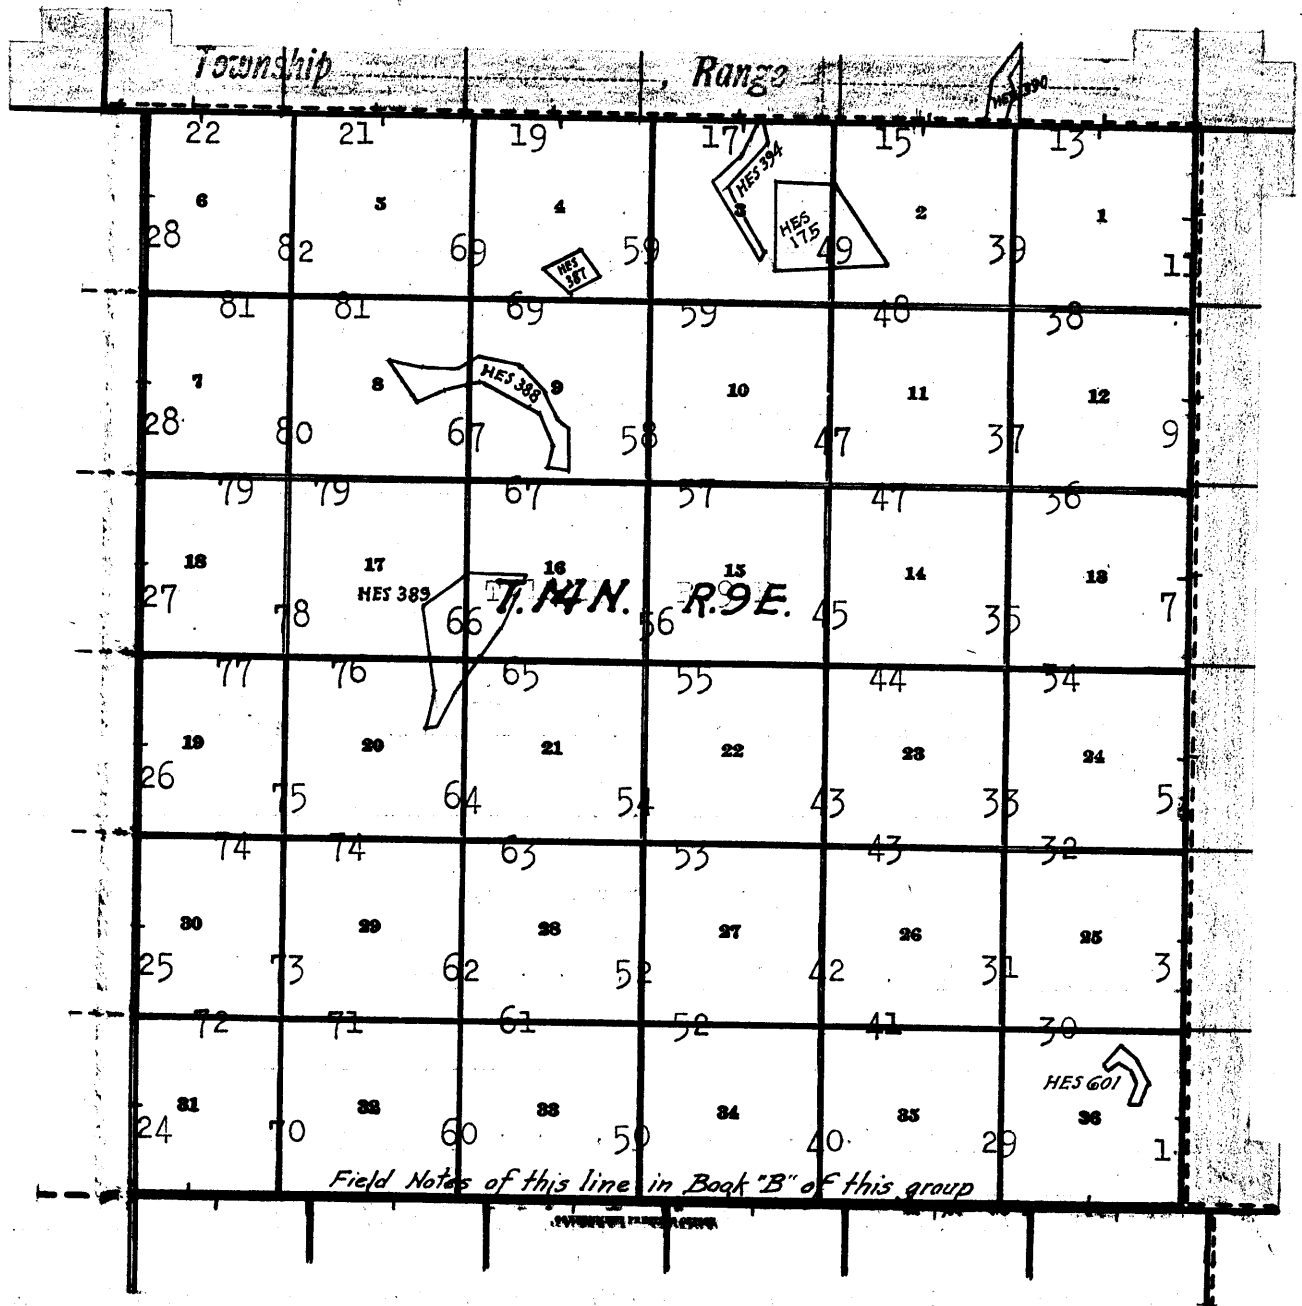

Field Notes of this line in Book "B" of this group

- Accepted surveys.
- Unsurveyed.
- ===== Lines surveyed under this group.
- Lines resurveyed under this group.
- Areas surveyed as per accepted plats on file.

RESURVEY W. BDY. OF T.14 N., R.10 E.

BOOK 4031

Chains

The resurveys and surveys hereinafter described were executed by Chas. W. Devendorf, U.S. C.E., and Benj. J. Mollette, U.S.T., with the light-mountain transits described in Book "A" of this Group, as are tape tests and method of operation.

From data furnished with the special instructions the longitude of the SE. cor. of T.14 N., R.9 E. is 111°20'37" W.; from observations taken in the past two months in adjoining Tps. to S. and SE. latitude is 34°32'38"N.

July 8, 1934; on meridian in sec. 26 of T.13 N., R.10 E., described in Book "B" of this Group, at 30-min. intervals from 7 to 11 a.m. and from 1 to 5 p.m., we make proper settings on the arcs of the solar attachments and, orienting the instruments with the solars, find that the resulting lines differ from the Polaris meridian by less than 1'30".

We repeat the tests of the arcs frequently by noon observation and verify the meridional indications weekly on the Polaris meridian during the period of the survey.

The observed magnetic declination is 14°55'E.

The W. bdy. of T.14 N., R.10 E., was surveyed in 1881 by T.F. White, U.S.D.S. The W. 1/4 sec. cor. and NW. cor. of sec. 31 were rehabilitated by the U.S. Forest Service in connection with the survey of H.E.S. No. 601. No other resurveys are of record.

The following notes describe the resurvey of the whole of the line and the establishment of a new set of corners for R.9 E., only, on the N. 3 1/2 miles of the line.

Beginning at the cor. of secs. 25, 30, 31 and 36,

South, on random line, bet. secs. 31 and 36.

To carry a line during the noon hours through the large trees on the line, I traverse as follows:

- S. 1°06' W., 6.11 chs.
- S. 3°39' E., 19.33 "
- S. 7°41' W., 4.65 "
- S. 5°56' W., 6.43 "
- S. 3°25' E., 3.65 " to point "E", 4 1/2 lks. E. of the 1/2 sec. cor. From 1/2 sec. cor.
- S. 0°08' E., 11.67 "
- S. 0°20' W., 22.71 "
- S. 1°58' E., 5.63 " to the cor. of Tps. 14 N., Rs. 9 and 10 E., only.

Computing, the S. half bears N. 0°08' W., 40.01 chs. dist. and the N. 1/2 bears North, 40.05 chs. dist.

From the cor. of Tps. 14 N., Rs. 9 and 10 E., only, reconstructed under this Group with an iron post, 3 ins. diam., described in Book "A",

N. 0°08' W., on true line, bet. secs. 31 and 36. (S. 1/2)

Over rolling land; through medium growth of yellow pine and oak timber and patches of 2nd growth,

Desc. 152 ft. over general NE. slope.

## Chains

- 3.10 Wire fence, bears N.70°E. and S.70°W.  
 15.00 Change to SE. slope; asc. 7 ft.  
 19.00 Low ridge, bears NE. and SW.; desc. 42 ft. over NW. slope.  
 33.60 Drain, course NW.; asc. 20 ft. over SW. slope.  
 33.80 Old, unused road, parallels drain.  
 40.01 The  $\frac{1}{4}$  sec. cor., dim remains of old wooden post in old mound of stone and a limestone, 20 x 12 x 10 ins., mkd.  $\frac{1}{2}$  on W. face, set by the U.S. Forest Service. In the mound, with the marked stone re-set beside

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$   
 ↑  
 S36 | S31  
 ↓  
 1934

from which

- A yellow pine, 18 ins. diam., bears S.30°E., 36 lks. dist., mkd.  $\frac{1}{2}$ S (original BT).  
 A yellow pine, 20 ins. diam., bears N.18°W., 85 lks. dist., mkd.  $\frac{1}{4}$ S BT (original BT).  
 A yellow pine, 8 ins. diam., bears N.71 $\frac{1}{2}$ °E., 63 lks. dist., mkd.  $\frac{1}{2}$  S31 BT (new).  
 A yellow pine, 14 ins. diam., bears S.51 $\frac{1}{2}$ °W., 82 lks. dist., mkd.  $\frac{1}{4}$  S36 BT (new).

Thence

North, on true line, bet. secs. 31 and 36 (N. $\frac{1}{2}$ ).

Over gentle SW. slope.

- 10.00 Spur, slopes W.; desc. 32 ft. over general N. slope.  
 21.00 Foot of slope; over flat, bears NE. and W.  
 29.00 Road, bears E. to Long Valley and W.; asc. 18 ft. over gentle S. slope.  
 31.62 Old line tree, yellow pine, 20 ins. diam., edge on line.  
 33.40 Wire fence, bears N. 70° W. and S. 70° E.  
 34.00 Short spur, slopes W.; desc. 8 ft.  
 39.40 Wire fence, bears SW. and N.5°E.  
 40.05 The cor. of secs. 25, 30, 31 and 36, dim remains of old wooden post in old mound of stone and a limestone, 15 x 10 x 10 ins., mkd. with 1 groove on S. and 5 grooves on N. faces, set by the U.S. Forest Service. In the mound, with the marked stone re-set beside
- Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 25, 30, 31 and 36, with brass cap mkd.

Chains

T14N  
R9E R10E  
S25 | S30  
S36 | S31

1934

from which

A pine, 12 ins. diam., bears N.87 $\frac{1}{2}$ °E., 58 lks. dist.,  
mkd. T14N R10E S30 BT. (new).

A pine, 7 ins. diam., bears S.18°E., 53 lks. dist.,  
mkd. T14N R10E S31 BT (new).

A pine, 5 ins. diam., bears S.72 $\frac{1}{4}$ °W., 115 lks. dist.,  
mkd. T14N R9E S36 BT (new).

A pine, 8 ins. diam., bears N.39 $\frac{1}{2}$ °W., 50 lks. dist.,  
mkd. T14N R9E S25 BT (new).

A pine, 30 ins. diam., bears N.71°W., 98 lks. dist.,  
marks partly grown over (old BT).

Land: rolling.

Soil: limestone adobe, loam, 2nd rate.

Timber: yellow pine, oak.

Undergrowth: scrub oak.

From orig. cor. of secs. 19, 24, 25 and 30,

South on random line, bet. secs. 25 and 30. (N.  $\frac{1}{2}$ )

40.09 A point 13 lks. W. of the orig.  $\frac{1}{4}$  sec. cor.

Thence

South, on random line, bet. secs. 25 and 30 (S.  $\frac{1}{2}$ ).

40.15 A point 7 lks. W. of the cor. of secs. 25, 30, 31 and 36.

Thence

N.0°06'W., on true line, bet. secs. 25 and 30. (S.  $\frac{1}{2}$ )

Over gently rolling land; through medium growth of pine  
and oak timber and scattering undergrowth.

Asc. 64 ft. over S. slope.

0.50 Telephone line, bears NE. and SW.

5.60 Wire fence, bears N.2°W. and S.2°E.

17.00 Low spur, slopes W.; desc. 28 ft. over N. slope.

35.00 Change to SE. slope; asc. 6 ft.

40.15 The  $\frac{1}{4}$  sec. cor., a rotted stake, 3 ins. square by 2 ft.  
long, with illegible marks, set in a mound of stone.  
In the mound, with the old stake beside

Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S25 | S30

1934

4

RESURVEY W. BDY. OF T:14 N.; R.10 E.

Chains	from which										
	A pine, 16 ins. diam., bears S.21 $\frac{1}{2}$ °E., 28 lks. dist., marks grown over (old BT); remarked: $\frac{1}{4}$ S30 BT.										
	A pine, 30 ins. diam., bears S.71°W., 191 lks. dist., mkd. $\frac{1}{2}$ S BT (old BT).										
	A pine, 6 ins. diam., bears S.28 $\frac{1}{2}$ °W., 31 lks. dist., mkd. $\frac{1}{4}$ S25 BT (new BT).										
	Thence										
	N.0°11'W., bet. secs. 25 and 30 (N. $\frac{1}{2}$ ).										
	Asc. 5 ft. over SE. slope.										
1.00	Low spur, slopes E.; desc. 22 ft. over NW. slope.										
6.20	Fence, bears N.5°E. and S.5°W.										
6.70	Swale, course NE.; asc. 17 ft. along E. slope.										
22.00	Spur, slopes N.20°E.; desc. 62 ft.										
30.75	Same fence, bears N.4°W.										
31.00	Drain, course NW.; over W. slope.										
35.55	Road, bears SE. and NW.										
36.40	Telephone line, bears N.10°W. and S.10°E.										
38.40	Same, bears S.15°W. and N.15°E.										
39.00	Change to SW. slope; asc. 5 ft.										
40.09	Orig. cor. of secs. 19, 24, 25 and 30, a wooden post, 4 ins. square by 2 ft. long, set in a small mound of stone, with partly legible marks. Beside the post										
	Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 19, 24, 25 and 30, with brass cap mkd.										
	<table border="1" style="margin: auto;"> <tr><td colspan="2">T14N</td></tr> <tr><td>R9E</td><td>R10E</td></tr> <tr><td>S24</td><td>S19</td></tr> <tr><td>S25</td><td>S30</td></tr> <tr><td colspan="2">1934</td></tr> </table>	T14N		R9E	R10E	S24	S19	S25	S30	1934	
T14N											
R9E	R10E										
S24	S19										
S25	S30										
1934											
	from which										
	A pine, 28 ins. diam., bears N.44°E., 57 lks. dist., marks partly grown over (old BT).										
	A dead pine snag, 22 ins. diam., bears S.36 $\frac{1}{2}$ °E., 70 lks. dist., partly legible marks (old BT).										
	A pine, 20 ins. diam., bears S.58 $\frac{1}{2}$ °W., 71 lks. dist., marks partly grown over (old BT), remarked: T14NR9ES25BT.										
	A pine, 16 ins. diam., bears N.60 $\frac{1}{2}$ °E., 57 lks. dist., mkd. T14N R10E S19 BT. (new).										
	A pine, 15 ins. diam., bears S.29 $\frac{1}{2}$ °E., 77 lks. dist., mkd. T14N R10E S30 BT (new).										
	A pine, 4 ins. diam., bears N.2 $\frac{1}{2}$ °W., 25 lks. dist., mkd. BT. (new).										

Chains

Land: rolling.  
Soil: adobe, 2nd rate.  
Timber: yellow pine, oak.  
Undergrowth: Scrub oak.

From orig. cor. of secs. 13, 18, 19 and 24,  
South, on random line, bet. secs. 19 and 24. (N.  $\frac{1}{2}$ )

40.10 A point 13 lks. W. of orig.  $\frac{1}{4}$  sec. cor.

Thence

South, on random line, bet. secs. 19 and 24 (S.  $\frac{1}{2}$ ).

40.09 A point 9 lks. W. of orig. cor. of secs. 19, 24, 25 and 30.

Thence

N. 0° 08' W., on true line, on W. bdy. of sec. 19. (S.  $\frac{1}{2}$ )

Asc. 15 ft. along gentle W. slope; through medium pine, oak and juniper timber and scattering undergrowth.

0.20 Telephone line, bears N. 5° W. and S. 5° E.

9.50 Change to NW. slope; desc. 14 ft.

11.00 Swale,  $1\frac{1}{2}$  chs. wide, drains W.; asc. 27 ft. over SW. slope.

11.80 Road, bears E. and W.

18.10 Telephone line, bears N. 20° E. and S. 20° W.

20.90 Low spur, slopes W.; desc. 26 ft. over NW. slope.

24.60 Drain, course W.; asc. 60 ft. over SW. slope.

30.01 Old line tree, pine, 30 ins. diam.

32.80 Low ridge, bears NE. and SW.; along W. slope.

33.03 Fence, bears N. 10° E. and S. 10° W.

36.20 Same fence, bears N. 10° W. and S. 10° E.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, supported in a mound of stone, for  $\frac{1}{4}$  sec. cor. of sec. 24, only, with brass cap mkd.

$\frac{1}{4}$   
S24  
1934

from which

A pine, 16 ins. diam., bears N. 48  $\frac{1}{2}$ ° W., 66 lks. dist., mkd.  $\frac{1}{4}$  S24 BT.

A pine, 16 ins. diam., bears S. 51  $\frac{1}{2}$ ° W., 36 lks. dist., mkd.  $\frac{1}{4}$  S24 BT.

40.09 The original  $\frac{1}{4}$  sec. cor., dim remains of old wooden post in a mound of stone. This  $\frac{1}{4}$  sec. cor. will now refer to areas in sec. 19, only. In the old mound

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the

6

## RESURVEY W. BDY. OF T. 14 N., R. 10 E.

Chains

ground, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor. of sec. 19, only, with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ | \\ S19 \end{array}$$

1934

from which

A pine, 12 ins. diam., bears S.46°W., 48 lks. dist., marks nearly grown over (old BT).

A pine, 14 ins. diam., bears N.34°E., 40 lks. dist., marks grown over (old BT); re-marked:  $\frac{1}{4}$  S19 BT.

A pine, 12 ins. diam., bears S.27°E., 104 lks. dist., mkd.  $\frac{1}{4}$  S19 BT (new BT).

Thence

N.0°11'W., on true line, on W. bdy. of sec. 19 (N. $\frac{1}{2}$ ).

Over general W. slope; desc. 58 ft.

14.10 Telephone line, bears S.5°E. and N.10°W.

17.20 Drain, course W.; over W. slope.

23.70 Enter swale, drains N.

28.90 Same telephone line, bears N.5°E.

29.90 Same telephone line, bears N.5°W.

35.00 Swale turns to NW.; asc. 34 ft. over SW. slope.

39.91 (80.00 chs. from SE. cor. of sec. 24) Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, supported in a mound of stone, for cor. of secs. 13 and 24, only, with brass cap mkd.

$$\begin{array}{c} T14N \\ R9E R10E \end{array}$$

$$\begin{array}{c} S13 \\ \hline S24 \end{array} | S19$$

1934

from which

A pine, 26 ins. diam., bears S.35 $\frac{1}{4}$ °W., 79 lks. dist., mkd. T14N R9E S24 BT. (new marks beside old).

A pine, 26 ins. diam., bears N.74 $\frac{1}{4}$ °W., 68 lks. dist., mkd. T14N R9E S13 BT. (new marks beside old).

40.10 The original cor. of secs. 13, 18, 19 and 24, a wooden post, 3 ins. square by 2 ft. long, with partly legible marks, set in a mound of stone. This cor. will now refer to areas in secs. 18 and 19, only. In place of the wooden post, which is re-set beside

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 18 and 19, only, with brass cap mkd.

$$\begin{array}{c} T14N \\ R9E R10E \end{array}$$

$$\begin{array}{c} S13 \\ \hline S18 \\ S19 \end{array}$$

1934



RESURVEY W. BDY. OF T.14 N., R.10 E.

Chains

from which

A pine, 18 ins. diam., bears N.51°E., 115 lks. dist., mkd. T14N R10E S18 BT beside proper old marks.

A pine, 28 ins. diam., bears S.26½°E., 58 lks. dist., mkd. T14N R10E S19 BT beside proper old marks.

(Other two old bearing trees now witness the cor. for secs. 13 and 24, only).

Land: rolling.

Soil: adobe, rocky, 2nd rate.

Timber: yellow pine, oak, juniper.

Undergrowth: scrub oak, 2nd growth pine.

From orig. cor. of secs. 7, 12, 13 and 18,

South, on random line, bet. secs. 13 and 18. (N.½)

40.15 A point 22 lks. W. of orig. ¼ sec. cor.

Thence

South, on random line, bet. secs. 13 and 18 (S.½).

40.01 A point 15 lks. W. of the cor. of secs. 18 and 19, only.

Thence,

N.0°13'W., on true line, on W. bdy. of sec. 18. (S.½)

Over gentle W. slope; through medium pine, oak and juniper timber and scattering undergrowth.

10.80 Telephone line, bears N.5°E. and S.5°W.

1.90 Drain, course W.; asc. 14 ft. over SW. slope.

8.70 Low spur, slopes W.; desc. 46 ft. over N. slope.


12.80 Swale, drains SW.; asc. 49 ft. over SE. slope.

25.00 Same swale, drains SE.; asc. 22 ft. over SW. slope.

29.50 Low spur, slopes W., from SE.; desc. 11 ft.

34.30 Road, bears E. and W.

39.81 (40.00 chs. form SE. cor. of sec. 13) Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, supported in a mound of stone, for ¼ sec. cor., of sec. 13, only, with brass cap mkd.



from which

A pine, 22 ins. diam., bears S.83½°W., 19 lks. dist., mkd. ¼ S13 BT beside old marks: ¼ S BT.

A pine, 10 ins. diam., bears N.65°W., 222 lks. dist., mkd. ¼ S13 BT (new BT).


40.01 The original ¼ sec. cor., an old rotted stake in a small mound of stone. This ¼ sec. cor. will now refer to areas

RESURVEY W. BDY. OF T: 14 N., R.10 E.

Chains

in sec. 18, only. In the mound

Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, supported in a mound of stone, for  $\frac{1}{4}$  sec. cor. of sec. 18, only, with brass cap mkd.



from which

A pine, 24 ins. diam., bears N.74 $\frac{1}{2}$ °E., 55 lks. dist., mkd.  $\frac{1}{4}$  S18 BT (new BT).

A pine, 28 ins. diam., bears S.39°E., 11 lks. dist., re-marked  $\frac{1}{4}$  S18 BT beside partly legible old marks.

(Other old tree is now witness to  $\frac{1}{4}$  sec. cor. of sec. 13, only).

Thence

N.0°19'W., on true line, on W. bdy. of sec. 18 (N. $\frac{1}{4}$ ).

Desc. 24 ft. over N. slope.

4.30 Telephone line, bears N.5°W. and S.5°E.

10.00 Swale, drains NW.; asc. 7 ft.


12.50 Short spur, slopes NW.; desc. 17 ft.

18.50 Telephone line, bears N.3°E. and S.3°W.

19.50 Drain, course W.; asc. 17 ft. over SW. slope.

27.00 Over W. slope; asc. 12 ft.

39.80 (80.00 chs. from the SE. cor. of sec. 13) Set an iron post, 3 ft. long, 2 ins. diam., 44 ins. in the ground, for cor. of secs. 12 and 13, only, with brass cap mkd.



from which

A pine, 15 ins. diam., bears S.50 $\frac{1}{2}$ °W., 84 lks. dist., mkd. T14N R9E S13 BT.

A pine, 14 ins. diam., bears N.52 $\frac{1}{4}$ °W., 114 lks. dist., mkd. T14N R9E S12 BT.

The new Flagstaff-Payson highway is expected to cover corner in about a month; the bearing trees selected are presumed to be off right-of-way.

40.15 The original cor. of secs. 7, 12, 13 and 18, a small old mound of stone and bits of old post. This cor. will now refer to areas in secs. 7 and 18, only. In the mound

Set an iron post, 3 ft. long, 2 ins. diam., 44 ins. in the ground, for cor. of secs. 7 and 18, only, with brass cap mkd.

Chains

T14N  
 R9E R10E  
 S12 | S 7  
 | S18  
 1934

from which

A pine, 26 ins. diam., bears N. 81 1/2° E., 10 lks. dist., marks grown over (old BT).

A pine, 24 ins. diam., bears S. 51 1/4° E., 43 lks. dist., marks grown over (old BT).

A pine, 20 ins. diam., bears S. 67 1/4° W., 26 lks. dist., marks grown over (old BT).

A pine, 18 ins. diam., bears N. 47 1/8° W., 53 lks. dist., marks grown over (old BT).

As all of the old bearing trees are soon to be destroyed by highway construction, I add new trees:

A yellow pine, 16 ins. diam., bears N. 62 1/2° E., 175 lks. dist., mkd. T14N R10E S7 BT.

A yellow pine, 25 ins. diam., bears S. 31 1/4° E., 146 lks. dist., mkd. T14N R10E S18 BT.

Land: gently rolling.  
 Soil: adobe, 2nd rate.  
 Timber: yellow pine, oak, juniper.  
 Undergrowth: 2nd growth pine, scrub oak.

From the original cor. of secs. 1, 6, 7 and 12,

South, on random line, bet. secs. 7 and 12. (N. 1/2)

40.11 A point 4 lks. W. of true point for orig. 1/4 sec. cor., re-located from original SW. bearing tree.

Thence, from true point,

South, on random line, bet. secs. 7 and 12 (S. 1/2).

40.13 A point 11 lks. W. of the cor. of secs. 7 and 18, only.

Thence

N. 0° 09' W., on true line, on W. bdy. of Sec. 7. (S. 1/2)

Desc. 17 ft. over gentle NW. slope; through medium growth of pine, oak and juniper timber and scattering brush.

1.50 (Approx.) Leave right-of-way of highway soon to be constructed, bears N. 10° W. and S. 10° E.

2.75 Road, soon to be replaced, bears N. 30° W. to Flagstaff and S. 30° E. to Pine and Payson.

3.00 Telephone line, bears N. 3° W. and S. 3° E.

11.90 Same road, bears NE. and SW.


17.10 Change to S. slope; asc. 8 ft.

## RESURVEY W. BDY. OF T. 14 N., R. 10 E.

Chains	Description
20.50	Low spur, slopes SW.; desc. 38 ft. over general W. slope.
33.80	Same telephone line, bears N.3°E. and S.3°W.
34.30	Change to SW. slope; asc. 14 ft.
38.10	Low spur, slopes W.; desc. 36 ft. over N. slope.
39.00	Same telephone line, bears N.3°W. and S.3°E.
39.65	(40.00 chs. from SE. cor. of sec. 12) Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. of sec. 12, only, with brass cap mkd.
	$\frac{1}{4}$   S12   1934
	from which
	A pine, 5 ins. diam., bears S.57 $\frac{1}{2}$ °W., 99 lks. dist., mkd. $\frac{1}{4}$ S12 BT.
	A pine, 24 ins. diam., bears N.60 $\frac{1}{4}$ °W., 92 lks. dist., mkd. $\frac{1}{4}$ S12 BT.
40.13	The true point for $\frac{1}{4}$ sec. cor., re-located at record course and distance from old SW. bearing tree. This $\frac{1}{4}$ sec. cor. will now refer to areas in sec. 7, only. At true point
	Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. of sec. 7, only, with brass cap mkd.
	$\frac{1}{4}$   S7   1934
	from which
	A pine, 24 ins. diam., bears S.88 $\frac{1}{2}$ °W., 80 lks. dist., mkd. $\frac{1}{4}$ S (old BT).
	A pine, 14 ins. diam., bears N.31°E., 139 lks. dist., mkd. $\frac{1}{4}$ S7 BT (new).
	A pine, 5 ins. diam., bears S.50°E., 165 lks. dist., mkd. $\frac{1}{4}$ S7 BT (new).
	Thence
	N:0°03'W., on true line, on W. bdy. of sec. 7 (N. $\frac{1}{2}$ ).
	Desc. 20 ft. over NW. slope.
2.50	Drain, course SW.; asc. 44 ft. over SE. slope.
7.70	Change to E. slope; desc. 18 ft.
12.80	Change to general S. slope; asc. 56 ft.
20.20	Road, bears SE. to Pine and Payson and NW. to Flagstaff.
24.10	Same drain, course S.25°E.
27.80	Telephone line, bears N.10°E. and S.10°W.
28.60	Telephone line, bears W., connects E.

Chains  
39.52

(80.00 chs. from the SE. cor. of sec. 12) Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 1 and 12, only, with brass cap mkd.




from which

A pine, 26 ins. diam., bears S.75°W., 51 lks. dist., mkd. T14N R10E S12 BT. (old BT re-marked).

A pine, 15 ins. diam., bears N.19½°W., 107 lks. dist., mkd. T14N R10E S1 BT.

40.11 The original cor. of secs. 1, 6, 7 and 12, a decayed wooden post, 2 ins. square by 3 ft. long, with portions of old marks remaining. This cor. will now refer to areas in secs. 6 and 7, only. In place of the old post, which is reset beside

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 6 and 7, only, with brass cap mkd.



from which

A pine, 12 ins. diam., bears N.67¼°E., 64 lks. dist., proper old marks (old BT).

A pine, 24 ins. diam., bears S.53°20'E., 93 lks. dist., proper old marks partly grown over (old BT).

A dead pine snag, 30 ins. diam., bears N.42½°W., 21 lks. dist., weathered old marks (old BT).

Land: rolling.  
Soil: adobe, rocky, 2nd rate.  
Timber: yellow pine, oak, juniper.  
Undergrowth: scrub oak, 2nd growth pine.

From original point for cor. of Tps. 14 and 15 N., Rs. 9 and 10 E., re-located from the old bearing trees,

South, on random line, bet. secs. 1 and 6 (N. ½)

40.20 A point 5 lks. W. of orig. point for ¼ sec. cor., re-located from old NE. bearing tree.

Thence, from true point

South, on random line, bet. secs. 1 and 6 (3.½).

40.10 A point 4 lks. E. of the cor. of secs. 6 and 7, only.

Thence

RESURVEY W. BDY. OF T. 14 N., R. 10 E.

Chains

N.0°03'E., on true line, on W. bdy. of sec. 6. (S. 1/2)


Asc. 75 ft. over gentle S. slope; through medium pine and oak timber and scattering undergrowth.

14.80 Telephone line, bears S.15°E. and N.20°W.

17.00 Over top of rise, slopes W.

28.00 Leave same; desc. 63 ft. over N. slope.

39.41 (40.00 chs. from the SE. cor. of sec. 1) Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor. of sec. 1, only, with brass cap mkd.




from which

A pine, 4 ins. diam., bears S.57 1/2°W., 23 lks. dist., mkd. 1/4 S1 BT.

A pine, 5 ins. diam., bears N.42 1/2°W., 28 1/2 lks. dist., mkd. 1/4 S1 BT.

40.10 The true point for original 1/4 sec. cor., re-located from the old NE. bearing tree. This 1/4 sec. cor. will now refer to areas in sec. 6, only. At true point

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor. of sec. 6, only, with brass cap mkd.



from which

A pine, 28 ins. diam., bears N.50°E., 24 lks. dist., mkd. 1/4 S BT (old BT).

A pine, 6 ins. diam., bears S.82°E., 14 lks. dist., mkd. 1/4 S6 BT (new BT).

A pine, 5 ins. diam., bears S.23°E., 27 1/2 lks. dist., mkd. 1/4 S6 BT (new BT).

Thence

N.0°04'W., on true line, on W. bdy. of sec. 6 (N. 1/2).

Over gentle W. slope.

4.70 Shallow wash, 20 lks. wide, course SW.; asc. 39 ft. over SW. slope.

15.50 Change to W. slope; desc. 12 ft.


20.50 Change to S. slope; asc. 58 ft.

40.20 The true point for cor. of Tps. 14 and 15 N., Rs. 9 and 10 E.; re-located from the old bearing trees. At the true point, with the remains of old stake found 20 lks. to the S. reset beside

Set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in the ground, for cor. of Tps. 14 and 15 N., Rs. 9 and 10 E., with brass cap mkd.

RESURVEY W. BDY. OF T. 14 N., R. 10 E.

Chains



from which

An oak, 18 ins. diam., bears N.44°E., 89 lks. dist., dim old marks; new marks: T15N R10E S31 BT (old BT).

A pine, 36 ins. diam., bears S.35°E., 9 lks. dist., marks partly grown over; new marks: T14N R10E S6 BT (old BT).

A pine, 30 ins. diam., bears S.51°W., 44 lks. dist., marks partly grown over; new marks: T14N R9E S1 BT (old BT).

An oak, 8 ins. diam., bears N.56°W., 93 lks. dist., re-marked T15N R9E S36 BT beside dim oak marks (old BT).

Cor. stands 10 lks. N. of E.-W. fence.

Land: rolling.

Soil: adobe, loam, 2nd and 3rd rates.

Timber: pine, oak, juniper.

Undergrowth: scrub oak, manzanita, 2nd growth pine.

RESURVEY

S. BDY. OF T. 15 N., R. 9 E.

The S. bdy. of T. 15 N., R. 9 E., was surveyed in 1881 by T.F. White, U.S.D.S. Some of the corners, as will be individually noted, were rehabilitated by the U.S. Forest Service in connection with H.E. Surveys Nos. 390 and 394. No other resurveys are of record.

The following notes describe the resurvey of the whole of the line, the re-monumentation of same for T. 15 N., R. 9 E., only, and establishment of the 1 sec. cors. for the N. tier of secs. of T. 14 N., R. 9 E.

From the original cor. of secs. 1, 2, 35 and 36,

East, on random line, on S. bdy. of sec. 36. (W. 1/2)

40.06 A point 7 lks. S. of orig. 1/2 sec. cor.

Thence

East, on random line, on S. bdy. of sec. 36 (E. 1/2).

38.00 A point 84 lks. N. of the cor. of Tps. 14 and 15 N., Rs. 9 and 10 E.

Thence

N. 88° 44' W., on true line, on S. bdy. of sec. 36. (E. 1/2)

Desc. 26 ft. over gentle SW. slope; through medium stand of open pine and oak timber.

2.80 Cross from N. to S. side of wire fence, approximately on line.

37.01

RESURVEY S.BDY. OF T. 15 N., R. 9 E.

Chains

38.01 The original 1/4 sec. cor., an old mound of stone with no evidence of wooden post of record. This 1/4 sec. cor. will now refer to areas in sec. 36, only. In the mound

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, and in a mound of stone to top, for 1/4 sec. cor. of sec. 36, only, with brass cap mkd.

1/4 S36

1934

from which

A pine, 7 ins. diam., bears N.20°E., 40 lks. dist., mkd. 1/4 S36 BT (new BT).

A pine, 26 ins. diam., bears N. 80 1/2°W., 107 lks. dist., mkd. 1/4 S36 BT (new BT).

A pine, 22 ins. diam., bears N.67°W., 108 lks. dist., marks grown over (old BT).

Thence

S.89°54'W., on true line, on S. bdy. of sec. 36 (W. 1/4).

Along wire fence, approximately on line.

1.95 (Mid-point in departure bet. the NE. and NW. cors. of sec. 1) Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor. of sec. 1, only, with brass cap mkd.

1/4 S1

1934

from which

A pine, 16 ins. diam., bears S.72 1/2°E., 61 lks. dist., mkd. 1/4 S1 BT.

A pine, 16 ins. diam., bears S.23 1/2°W., 118 lks. dist., mkd. 1/4 S1 BT.

Asc. 48 ft. over gentle SW. slope.

25.00 Change to S. slope; desc. slightly.

29.83 Old line tree, a pine, 30 ins. diam., approximately on line.

33.00 Point of intersection of line run N.0°00'W. bet. secs. 1 and 2; closing cor. set at this point hereinafter described.

38.30 The same, bears N., joins 1.

40.06 The original cor. of secs. 1, 2, 35 and 36, restored by the U.S. Forest Service with a limestone, 14 x 8 x 4 ins. above ground, mkd. with 1 groove on E. and 5 grooves on W. faces, properly located as evidenced by the old bearing trees. This cor. will now refer to areas in secs. 35 and 36, only. Beside the marked stone

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 35 and 36, only, with brass cap mkd.



RESURVEY S. BDY. OF T.15 N., R.9 E.

Chains

T15NR9E  
S35 | S36  
SI  
T14NR9E  
1934

from which

A pine, 26 ins. diam., bears N.33 $\frac{1}{2}$ °E., 38 lks. dist., old marks dimmed; new marks: T15N R9E S36 BT (old BT).

A pine, 28 ins. diam., bears S.32 $\frac{1}{2}$ °E., 99 lks. dist., old marks dimmed; new marks: T15N R9E S35 BT (old BT).

A pine, 24 ins. diam., bears S.66 $\frac{1}{2}$ °W., 91 lks. dist., proper old marks which I destroy (old BT).

A pine stump, 24 ins. diam., bears N.48 $\frac{1}{2}$ °W., 71 lks. dist., proper old marks, which I destroy (old BT).

An E.-W. wire fence bears 60 lks. N.

Land: gently rolling and level.  
Soil: adobe, 2nd and 3rd rates.  
Timber: yellow pine, oak, juniper.  
Undergrowth: scrub oak, 2nd growth pine. Fair grass.

From the original cor. of secs. 2,3,34 and 35,

East, on random line, on S. bdy. of sec. 35. (W.  $\frac{1}{2}$ )

40.12 Intersect the  $\frac{1}{4}$  sec. cor.

80.17 Intersect the cor. of secs. 35 and 36, only.

Thence

West, on true line, on S. bdy. of sec. 35. (E.  $\frac{1}{2}$ )

Over gentle S. slope; through medium growth of pine, oak and juniper timber and scattering undengrowth.

0.05 Wire fence, bears S. and joins N.

1.84 Point of intersection of line run N.0°09'W. bet. secs. 1 and 2; closing cor. set at this point hereinafter described.

3.90 Wire fence, bears N.80°E: and irregularly W.

5.20 Change to NW. slope; desc. 8 ft.

7.14 Intersect cor. No.5 of H.E.S. No.390, a limestone, 24 x 12 x 8 ins. above ground, firmly set and mkd. and witnessed as described in the official record.

Along S. bdy. of patented land.

Desc. 33 ft. over NW. slope.

11.70 Willow Valley wash, 40 lks. wide; 2 ft. deep, course S., soon SE.; asc. 15 ft. over gradual E. slope.

16.36 Intersect cor. No.6 of H.E.S. No.390, a limestone, 22 x 10 x 5 ins. above ground, firmly set and mkd. and witnessed as described in the official record.

Leave S. bdy. of patented land.

## RESURVEY S. BDY. OF T. 15 N., R. 9 E.

Chains	
16.40	Cor. of fences to NW. and E. bears 70 lks. N.
17.20	Road (soon to be re-built and relocated), bears NW. to Flagstaff and SE. to Pine and Payson.
	Asc. 98 ft. over NE. slope.
20.60	Old road, bears N. and S.
31.30	Hill, bears NW. and SE.; desc. 65 ft. over SW. slope.
40.05	The original $\frac{1}{4}$ sec. cor.; re-constructed in original position by the U.S. Forest Service with a granite stone, 10 x 10 x 8 ins., mkd. $\frac{1}{4}$ on N. face. This $\frac{1}{4}$ sec. cor. will now refer to areas in sec. 35, only. Beside the stone
	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground and in a small mound of stone, for $\frac{1}{4}$ sec. cor. of sec. 35, only, with brass cap mkd.
	<u><math>\frac{1}{4}</math> S35</u>
	1934
	from which
	A yellow pine, 18 ins. diam., bears N.44°E., 71 lks. dist., old marks: $\frac{1}{4}$ S; new marks $\frac{1}{4}$ S35 BT (old BT).
	A pine, 38 ins. diam., bears S.38°W., 54 lks. dist., marks partly grown over (old BT).
	A yellow pine, 5 ins. diam., bears N.38 $\frac{1}{2}$ °W., 25 lks. dist., mkd. $\frac{1}{4}$ S35 BT (new BT).
	Thence
	West, on true line, on S. bdy. of sec. 35 (W. $\frac{1}{2}$ ).
0.45	Wire fence, bears S.60°W. and N.
1.71	(Mid-point on N. bdy. of sec. 2) Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 1, only, with brass cap mkd.
	<u><math>\frac{1}{4}</math> S2</u>
	1934
	from which
	A pine, 38 ins. diam., bears S.84°E., 90 lks. dist., mkd. $\frac{1}{4}$ S2 BT.
	A pine, 18 ins. diam., bears S.52 $\frac{1}{2}$ °W., 41 lks. dist., mkd. $\frac{1}{4}$ S2 BT.
4.70	An earth dyke, 4 ft. high, across small draw, course SE.; asc. 46 ft. over NE. slope.
14.00	Top of ascent; over flat, slopes S.
40.12	The original cor. of secs. 2, 3, 34 and 35, a sharpened stake, 3 ins. square, with weathered marks, set in a mound of stone. This cor. will now refer to areas in secs. 34 and 35, only. In the mound, with the old stake reset beside
	Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 34 and 35, only, with brass cap mkd.

Chains

T15NR9E

S34 | S35

S2

T14N

1934

from which

A pine, 6 ins. diam., bears N.35 $\frac{1}{4}$ °E., 42 lks. dist.,  
mkd. T15N R9E S35 BT (new BT).

A pine, 32 ins. diam., bears N.79°E., 88 lks. dist.,  
marks grown over (old BT).

A pine, 20 ins. diam., bears S.26°E., 148 lks. dist.,  
marks grown over (old BT).

A pine, 18 ins. diam., bears S.34°W., 67 lks. dist.,  
marks grown over (old BT).

A pine, 40 ins. diam., bears N.27°W., 120 lks. dist.,  
marks grown over (old BT).

A pine, 6 ins. diam., bears N.31 $\frac{1}{4}$ °W., 58 lks. dist.,  
mkd. T15N R9E S34 BT (new BT).

Land: level and rolling.

Soil: adobe and loam, 2nd and 3rd rates.

Timber: yellow pine, oak, juniper.

Undergrowth: 2nd growth pine, scrub oak. Fair grass.

-----  
From the cor. of secs. 3,4,33 and 34,

East, on random line, on S. bdy. of sec. 34. (W. $\frac{1}{2}$ )

40.09 A point 8 lks. N. of the  $\frac{1}{2}$  sec. cor.

Thence

East, on random line, on S. bdy. of sec. 34 (E. $\frac{1}{2}$ ).

45.51 Intersect the cor. of secs. 34 and 35, only.

Thence

West, on true line, on S. bdy. of sec. 34. (E. $\frac{1}{2}$ )

Desc. 69 ft. over gentle NW. slope; through medium growth  
of pine, oak and juniper timber and patches of 2nd growth  
pine.

1.52 Point of intersection of line run N.0°09'W. bet. secs. 2  
and 3; closing cor. set at this point hereinafter de-  
scribed.

15.10 Old road, bears N. and S.

23.00 Old road, bears N. and S..

33.83 Intersect cor. No.2 of H.E.S. No.394, a lava stone, 14 x  
12 x 6 ins. above ground, firmly set, and mkd. and wit-  
nessed as described in the official record.

Along N. bdy. of patented land.

35.98 Intersect cor. No.1 of H.E.S. No. 394, a lava stone, 12 x  
10 x 6 ins. above ground, firmly set, and mkd. and wit-  
nessed as described in the official record.

RESURVEY S. BDY. OF T. 15 N., R. 9 E.

Chains

Leave N. bdy. of patented land.

41.68 (Mid-point on N. bdy. of sec. 3) Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, supported in a mound of stone, for  $\frac{1}{4}$  sec. cor. of sec. 3, only, with brass cap mkd.

$\frac{1}{4}$  S3  
1934

from which

A yellow pine, 36 ins. diam., bears S.42 $\frac{1}{2}$ °E., 125 lks.. dist., mkd.  $\frac{1}{4}$  S3 BT.

A yellow pine, 14 ins. diam., bears S.76 $\frac{1}{2}$ °W., 41 lks. dist., mkd.  $\frac{1}{4}$  S3 BT.

45.51 Intersect the  $\frac{1}{4}$  sec. cor., re-constructed in original position by the U.S. Forest Service with a lava stone, 10 x 10 x 6 ins. above ground, firmly set, and mkd.  $\frac{1}{4}$  on N. face. This  $\frac{1}{4}$  sec. cor. will now refer to areas in sec. 34, only. Beside the mkd. stone

Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor. of sec. 34, only, with brass cap mkd.

$\frac{1}{4}$  S34  
1934

from which

A yellow pine, 26 ins. diam., bears N.62°E., 91 lks. dist., marks grown over; new marks:  $\frac{1}{4}$  S34 BT (old BT).

A yellow pine, 16 ins. diam., bears N.16 $\frac{1}{2}$ °W., 177 lks.. dist., mkd.  $\frac{1}{4}$  S34 BT. (new BT).

Thence over flat

N.89°53'W., on true line, on S. bdy. of sec. 34 (W. $\frac{1}{4}$ ).

Continue over flat.

20.00 Begin ascent of 110 ft. over rocky SE. slope.

36.32 Point of intersections of line run N.0°10'W. bet. secs. 3 and 4; closing cor. set at this point hereinafter described. marks almost completely legible. This cor. will now refer to areas in secs. 33 and 34, only. Beside the

40.09 The original cor. of secs. 3, 4, 33 and 34, a wooden post, 4 ins. square by 3 ft. long, set in a mound of stone, with old marks, almost completely legible. This cor. will now refer to areas in secs. 33 and 34, only. Beside the post

Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground, and in a mound of stone to top, for cor. of secs. 33 and 34, only, with brass cap mkd.

T15N R9E  
S33 S34  
S4  
T14N  
1934

from which

RESURVEY S. BDY. OF T. 15 N., R. 9 E.

BOOK 4031

Chains

A yellow pine, 5 ins. diam., bears N.62½°E., 60 lks. dist., mkd. T15N R9E S34 BT (new BT).

A pine, 14 ins. diam., bears N.16°E., 140 lks. dist., marks grown over (old BT).

A pine, 26 ins. diam., bears S.34°E., 93 lks. dist., marks grown over (old BT).

A pine, 12 ins. diam., bears S.38°W., 27 lks. dist., marks grown over (old BT).

A pine, 20 ins. diam., bears N.68°W., 120 lks. dist., marks grown over (old BT).

A yellow pine, 22 ins. diam., bears N.8¼°W., 59 lks. dist., mkd. T15N R9E S33 BT (new BT).

Land: flat and rolling.  
Soil: E.¼ adobe, 2nd rate; W.¼ rocky, 4th rate.  
Timber: yellow pine, oak, juniper.  
Undergrowth: 2nd growth pine. Fair grass.

From the original cor. of secs. 4, 5, 32 and 33,

East, on random line, on S. bdy. of sec. 33. (W.½)

40.10 A point 18 lks. N. of the original ¼ sec. cor.

Thence

East, on random line, on S. bdy. of sec. 33. (E.½)

40.11 A point 9 lks. N. of the cor. of secs. 33 and 34, only.

Thence

N.89°52'W., on true line, on S. bdy. of sec. 33. (E. ½)

Over gentle S. slope; through scattering pine and oak timber and patches of 2nd growth.

36.24 (Mid-point on N. bdy. of sec. 4) Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground, and in a mound of stone to top, for ¼ sec. cor. of sec. 4, only, with brass cap mkd.

¼ S4  
1934

from which

An oak, 4 ins. diam., bears S.43½°E., 40 lks. dist., mkd. ¼ S4 BT.

A pine, 14 ins. diam., bears S.27¼°W., 52 lks. dist., mkd. ¼ S4 BT.

Over W. slope; desc. 42 ft.

40.11 The original ¼ sec. cor., a decomposed flattened stake, set in a mound of stone, with weathered marks. This ¼ sec. cor. will now refer to areas in sec. 33, only. In place of the stake, which is reset beside

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, and in a mound of stone to top, for ¼ sec. cor.

## BOOK 4031

20

RESURVEY S. BDY. OF T. 15 N., R. 9 E.

Chains		mks
	of sec. 33, only, with brass cap mkd.	
	1/4 S33.	
	1934	
	from which	
	A pine, 5 ins. diam., bears N.0 $\frac{1}{2}$ °E., 38 lks. dist., mkd. 1/4 S33 BT (new BT).	
	An oak, 4 ins. diam., bears N.35 $\frac{1}{2}$ °E., 35 lks. dist., mkd. 1/4 S33 BT (new BT).	
	An oak, 12 ins. diam., bears N.37°E., 88 lks. dist., marks grown over (old BT).	
	A pine, 34 ins. diam., bears S.72°W., 56 lks. dist., marks grown over (old BT).	
	Thence	
	N.89°45'W., on true line, on S. bdy. of sec. 33 (W. 1/2).	
	Desc. 92 ft. over gentle W. slope.	
3.10	Wire fence, bears N. and S.	
36.14	Point of intersection of line run N.0°10'W. bet. secs. 4 and 5; closing cor. set at this point hereinafter de- scribed.	
40.10	The original cor. of secs. 4, 5, 32 and 33, a stone, 18 x 12 x 6 ins., mkd. with 4 grooves on E. and 2 grooves on W. faces, set in a mound of stone, with no evidence remain- ing of wood post of record. This cor. will now refer to areas in secs. 32 and 33, only. In place of the stone which is reset beside,	
	Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground, and in a mound of stone to top, for cor. of secs. 32 and 33, only, with brass cap mkd.	
	T15NR9E	
	S32   S33	
	S5	
	T14N	
	1934	
	from which	
	A yellow pine, 14 ins. diam., bears N.27 $\frac{1}{2}$ °E., 27 lks. dist., mkd. T15N R9E S33 BT (new BT).	
	A pine, 12 ins. diam., bears N.56°E., 91 lks. dist., marks grown over (old BT).	
	A pine, 24 ins. diam., bears S.50°E., 133 lks. dist., marks grown over (old BT).	
	A pine, 12 ins. diam., bears S.88°W., 16 lks. dist., marks grown over (old BT).	
	A pine, 28 ins. diam., bears N.49°W., 127 lks. dist., marks grown over (old BT) re-marked T.15N R9E S32 BT.	
	Land: gently rolling.	
	Soil: adobe, rocky, 3rd rate.	
	Timber: yellow pine, oak, juniper.	
	Undergrowth: 2nd growth pine. Fair grass.	

RESURVEY S. BDY. OF T. 15 N., R. 9 E.

Chains

From the original cor. of secs. 5, 6, 31 and 32, East, on a random line, on S. bdy. of sec. 32. (W. 1/2)

40.09 A point 7 lks. N. of the original 1/4 sec. cor.

Thence

East, on random line, on S. bdy. of sec. 32 (E. 1/2).

39.72 A point 24 lks. S. of the cor. of secs. 32 and 33, only.

Thence

S. 89° 39' W., on true line, on S. bdy. of sec. 32. (E. 1/2)

Desc. 41 ft. over gentle W. slope; through medium growth of pine, oak and juniper timber and undergrowth.

20.00 Over flat, slopes S.

36.00 (Mid-point on N. bdy. of sec. 5) Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor. of sec. 5, only, with brass cap mkd.

1/4 S5  
1934

from which

A yellow pine, 10 ins. diam., bears S. 68 1/2° E., 120 lks. dist., mkd. 1/4 S5 BT.

A yellow pine, 20 ins. diam., bears S. 38 1/2° W., 45 lks. dist., mkd. 1/4 S5 BT.

39.72 The original 1/4 sec. cor., an old flattened, sharpened stake, 3 ins. diam., set in a mound of stone, mkd. 1/4 S. This 1/4 sec. cor. will now refer to areas in sec. 32, only. In place of the stake, which is re-set beside

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor. of sec. 32, only, with brass cap mkd.

1/4 S32  
1934

from which

A pine, 5 ins. diam., bears N. 74 1/4° E., 59 lks. dist., mkd. 1/4 S32 BT (new BT).

A pine, 16 ins. diam., bears S. 30° E., 19 lks. dist., mkd. 1/4 S BT (old BT). I destroy the marks.

A pine, 14 ins. diam., bears N. 60 3/4° W., 73 lks. dist., mkd. 1/4 S32 BT (new BT).

A pine, 24 ins. diam., bears N. 32° W., 34 lks. dist., marks grown over (old BT).

Thence

N. 89° 54' W., on true line, on S. bdy. of sec. 32 (W. 1/2).

Desc. 34 ft. over gentle W. slope.

15.00 A wide shallow drain, course SE.; asc. 23 ft. over gentle NE. slope.

RESURVEY S. BDY. OF T. 15 N., R. 9 E.

Chains	36.24 Point of intersection of line run N.0°11'W. bet. secs. 5 and 6; closing cor. set at this point hereinafter described.
40.09	The original cor. of secs. 5, 6, 31 and 32, a wooden stake, 3 ins. square by 3 ft. long with partly legible marks and a properly grooved stone, both set in a small mound of stone. This cor. will now refer to areas in secs. 31 and 32; only. In place of the post, which, with the stone, is reset beside,
	Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the ground, and in a mound of stone to top, for cor. of secs. 31 and 32, only, with brass cap mkd.
	<p>T15NR9E  <u>S31   S32</u>  S6  T14N  1934</p>
	from which.
	A pine, 16 ins. diam., bears N.50°E., 78 lks. dist., marks grown over (old BT).
	A yellow pine, 24 ins. diam., bears N.73½°E., 136 lks. dist., mkd. T15N R9E S32 BT (new BT).
	A pine, 16 ins. diam., bears S.34°E., 20 lks. dist., proper old marks, which I destroy (old BT).
	A pine, 24 ins. diam., bears S.47°W., 10 lks. dist., proper old marks, which I destroy (old BT).
	A yellow pine, 14 ins. diam., bears N.19°W., 82 lks. dist., marks grown over (old BT) new marks: T15N R9E S31 BT.
	<p>Land: gently rolling.  Soil: adobe, rocky, 2nd and 3rd rates.  Timber: yellow pine, oak, juniper.  Undergrowth: scrub oak, 2nd growth pine.</p>
-----	
	From the original cor. of Tps. 14 and 15 N., Rs. 8 and 9 E. East, on random line, on S. bdy. of sec. 31. (W. ½)
40.02	A point 27 lks. N. of the original ¼ sec. cor.
	Thence
	East, on random line, on S. bdy. of sec. 31 (E. ½).
40.10	A point 22 lks. N. of the cor. of secs. 31 and 32, only.
	Thence
	N.89°41'W., on true line, on S. bdy. of sec. 31. (E. ½)
	Asc. 48 ft. over gradual S. slope; through medium growth of pine and oak timber and scattering undergrowth.
36.15	(40.00 chs. W. from the NE. cor. of sec. 6) Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, and in a mound of stone to top, for ¼ sec. cor. of sec. 6, only, with brass cap mkd.



RESURVEY S. BDY. of T. 15 N., R. 9 E.

Chains

1/4 S6  
1934

from which

An oak, 5 ins. diam., bears S. 37 1/2° E., 33 lks. dist.,  
mkd. 1/4 S6 BT.

An oak, 6 ins. diam., bears S. 37 1/2° W., 89 lks. dist.,  
mkd. 1/4 S6 BT.

40.10 The 1/4 sec. cor., a stone, 20 x 10 x 8 ins., mkd. 1/4 on N.  
face, set in a mound of stone, with no evidence of the  
wooden post of record. This 1/4 sec. cor. will now refer  
to areas in sec. 31, only. In place of the stone, which  
is reset beside

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the  
ground, for 1/4 sec. cor. of sec. 31, only, with brass cap  
mkd.

1/4 S31  
1934

from which

A yellow pine, 4 ins. diam., bears N. 36 1/2° E., 59 lks.  
dist., mkd. 1/4 S31 BT. (new BT).

A yellow pine, 12 ins. diam., bears S. 62 1/2° W., 41 lks.  
dist., marks grown over (old BT)..

A yellow pine, 4 ins. diam., bears N. 16° W., 40 lks.  
dist., mkd. 1/4 S31 BT (new BT).

Thence

N. 89° 37' W., on true line, on S. bdy. of sec. 31 (W. 1/2).

Asc. 155 ft. over SE. slope.

20.87 Point of intersection of line run due North bet. Tps. 14  
N., Rs. 8 and 9 E.; closing cor. set at this point here-  
inafter described.

Asc. 66 ft. over SE. slope.

31.90 Low ridge, bears NE. and SW.; desc. 62 ft. over NW. slope.

40.02 The original cor. of Tps. 14 and 15 N., Rs. 8 and 9 E.,  
a stone, 22 x 12 x 12 ins., set in a mound of stone,  
with dim grooves on the four faces. This cor. will now  
refer to areas in Tps. 15 N., Rs. 8 and 9 E., only. In  
place of the marked stone, which is reset beside

Set an iron post, 3 ft. long, 3 ins. diam., 8 ins. in the  
ground, and in a mound of stone to top, for cor. of Tps.  
15 N., Rs. 8 and 9 E., only, with brass cap mkd.

T15N  
R8E R9E  
S36 S31  
SI  
T14NR8E  
1934

from which

A yellow pine, 8 ins. diam., bears N. 53 1/2° E., 62 lks.  
dist., mkd. T15N R9E S31 BT (new BT).

RESURVEY S. BDY. OF T. 15 N., R. 9 E.

Chains	
	<p>A yellow pine, 8 ins. diam., bears N.74½°W., 100 lks. dist., mkd. T15N R8E S36 BT (new BT).</p> <p>A dead yellow pine, 16 ins. diam., bears N.60½°W., 69 lks. dist., proper old marks (old BT).</p> <p>Other old bearing trees are missing.</p> <p>Cor. stands in heavy growth of young oak timber.</p> <p>Land: gently rolling. Soil: adobe, rocky, 2nd and 3rd rates. Timber: yellow pine, oak, juniper. Undergrowth: 2nd growth pine and oak.</p>
	<p>SURVEY WEST BOUNDARY OF TOWNSHIP 14 NORTH, RANGE 9 EAST.</p> <p>Beginning at the cor. of Tps. 13 and 14 N., Rs. 8 and 9 E., established under this Group, described in Book "B", North, bet. secs. 31 and 36.</p> <p>Asc. 53 ft. over SE. slope; through heavy pine, fir and spruce timber and patches of dense undergrowth.</p> <p>3.90 Spur, slopes NE.; over W. slope.</p> <p>23.90 Same spur, slopes NW.; desc. 194 ft. over NW. slope.</p> <p>38.00 (2.00 chs. S.) Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in the ground, supported by a mound of stone, for witness cor. to ½ sec. cor., with brass cap mkd.</p> <div style="text-align: center;"> <p>W C</p> <p>¼</p> <p>S36   S31</p> <p>1934</p> </div> <p style="text-align: right;">from which</p> <p>A spruce, 8 ins. diam., bears N.68°E., 18 lks. dist., mkd. WC ¼ S31 BT.</p> <p>A spruce, 8 ins. diam., bears N.33°W., 28 lks. dist., mkd. WC ¼ S36 BT.</p> <p>38.30 Rim of Clear Creek Canyon, bears E. and W., soon NW.; desc. 530 ft. over rugged N. slope.</p> <p>40.00 True point for ¼ sec. cor. falls among cliffs, a point very difficult of access.</p> <p>49.50 Clear Creek, stream 30 lks. wide, 6 ins. deep, in channel, 1.20 chs. wide, course NW.; asc. 520 ft. over SW. slope.</p> <p>64.50 Short spur, slopes W.; desc. 250 ft. over NW. slope.</p> <p>71.50 Short canyon, course W.; asc. 300 ft. over SW. slope.</p> <p>80.00 True point for cor. of secs. 25, 30, 31 and 36 falls on face of broken cliff, a point difficult of access. Witness cor. established 2.50 chs. N. as hereinafter described Land: rolling and mountainous. Soil: adobe, rocky, 2nd and 3rd rates. Timber: pine, fir, spruce. Undergrowth: scrub oak, manzanita, sagem 2nd growth pine.</p>


Chains From true point for cor. of secs. 25, 30, 31 and 36 North, bet. secs. 25 and 30.

Over mountainous land; through scattering pine, fir, oak and juniper timber and patches of undergrowth.

Asc. 110 ft. over broken cliffs, face SW.

2.10 Rim of Clear Creek canyon, bears SE. and W.

2.50 (2.50 chs. N. of true point) Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground, and in a mound of stone to top, for witness cor. to cor. of secs. 25, 30, 31 and 36, with brass cap mkd.



1934

from which

A yellow pine, 6 ins. diam., bears N. 22 $\frac{1}{2}$ ° E., 52 lks. dist., mkd. WC T14N R9E S30 BT.

A yellow pine, 14 ins. diam., bears S. 12 $\frac{1}{4}$ ° E., 84 lks. dist., mkd. WC T14N R9E S30 BT.


A yellow pine, 10 ins. diam., bears S. 89 $\frac{1}{2}$ ° W., 19 lks. dist., mkd. WC T14N R8E S25 BT.

A yellow pine, 14 ins. diam., bears N. 56 $\frac{1}{2}$ ° W., 21 lks. dist., mkd. WC T14N R8E S25 BT.

Asc. 250 ft. over rolling S. slope.

27.50 Top of ascent; over gentle W. slope; through open pine and oak timber.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.



1934

from which

A white oak, 10 ins. diam., bears S. 36 $\frac{1}{4}$ ° E., 26 lks. dist., mkd.  $\frac{1}{4}$  S30 BT.

A yellow pine, 16 ins. diam., bears S. 84 $\frac{1}{2}$ ° W., 12 lks. dist., mkd.  $\frac{1}{4}$  S25 BT.

42.30 Drain, course W.; asc. 17 ft. over S. slope.

45.50 Change to gentle W. slope.

75.00 Wide, shallow draw, course S. 30° W.

79.70 Dim road, bears N. 30° E. and S. 30° W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in the ground, with a stone, 8 x 4 x 4 ins., mkd. with cross (X), deposited at base, and in a mound of stone to top, for cor. of secs. 19, 24, 25 and 30, with brass cap mkd.

SURVEY W. BDY. OF T.14 N., R.9 E., YAVAPAI

Chains



from which

A yellow pine, 20 ins. diam., bears S.61°E., 227 lks. dist., mkd. T14N R9E S30 BT.

No other suitable trees available.

Land: flat, rolling and mountainous.

Soil: adobe, rocky, 3rd rate.

Timber: pine, juniper, oak.

Undergrowth: scrub oak, sage.

North, bet. secs. 19 and 24.


Over flat; through scattering pine and juniper timber and scattering undergrowth.

6.30 Old road, bears NE. and SW.

10.00 Low spur, slopes SW.; desc. 53 ft. over NW. slope.

21.80 Wash, 10 lks. wide, course SW.; asc. 63 ft. over S. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, and in a mound of stone to top, for 1/4 sec. cor., with brass cap mkd.



from which

A juniper, 6 ins. diam., bears N.16 1/2°E., 90 lks. dist., mkd. 1/4 S19 BT.


A juniper, 18 ins. diam., bears N.43 1/4°W., 85 lks. dist., mkd. 1/4 S24 BT.

Asc. 11 ft. over S. slope.

44.00 Top of ascent; over flat, bears E. and W.

58.10 Fence, bears E. and W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, supported in a mound of stone, for cor. of secs. 13, 18, 19 and 24, with brass cap mkd.



from which

A yellow pine, 18 ins. diam., bears N.5°E., 253 lks. dist., mkd. T14N R9E S18 BT.

A yellow pine, 16 ins. diam., bears S.15 1/2°E., 257 lks. dist., mkd. T14N R9E S19 BT.

SURVEY W. BDY. OF T. 14 N., R. 9 E.

BOOK 4031

Chains

A yellow pine, 24 ins. diam., bears S.66 $\frac{1}{4}$ °W., 169 lks.  
dist., mkd. T14N R8E S24 BT.

A yellow pine, 12 ins. diam., bears N.70 $\frac{1}{4}$ °W., 280 lks.  
dist., mkd. T14N R8E S13 BT.

Land: flat and gently rolling.  
Soil: adobe, rocky, 3rd rate.  
Timber: yellow pine, juniper, oak.  
Undergrowth: scrub oak, sage.

North, bet. secs. 13 and 18.

Over flat; through open pine, oak and juniper timber.

5.00 Change to gentle SW. slope; asc. 57 ft.

25.00 Low rise, bears NW. and SE.; desc. 16 ft. over gentle N.  
slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the  
ground, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor.,  
with brass cap mkd.

S13 | S18

1934

from which

A yellow pine, 14 ins. diam., bears N.67°E., 63 lks.  
dist., mkd.  $\frac{1}{4}$  S18 BT.

A yellow pine, 14 ins. diam., bears N.62 $\frac{1}{2}$ °W., 67 lks.  
dist., mkd.  $\frac{1}{4}$  S13 BT.

Desc. 16 ft. over gradual NE. slope.

60.00 Over flat, slopes N.

73.00 An earth dam and reservoir bears 2 chs. W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the  
ground, with a stone, 6 x 4 x 4 ins., mkd. with cross (X),  
deposited beside post, for cor. of sec. 7, 12, 13 and 18,  
with brass cap mkd.

T14N

R8E R9E

S12 | S 7

S13 | S18

1934

from which

A yellow pine, 28 ins. diam., bears S.60 $\frac{1}{4}$ °W., 134 lks.  
dist., mkd. T14N R9E S13 BT.

A yellow pine, 20 ins. diam., bears N.74 $\frac{1}{4}$ °W., 363 lks.  
dist., mkd. T14N R8E S13 BT.

No other bearing trees available.

Land: flat and gently rolling.  
Soil: adobe, 2nd and 3rd rates.  
Timber: pine, juniper, oak.  
Undergrowth: sage.

SURVEY W. BDY. OF T. 14 N., R. 9 E.

Chains

North, bet. secs. 7 and 12.

Over open flat.

14.00 Dim road, bears NW. and S.30°W.

15.00 Enter medium growth of pine and oak timber, bears NE. and SW.

27.50 Same road, bears NE. and SW.; asc. 48 ft. over SE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground, and in a mound of stone to top, for 1/4 sec. cor., with brass cap mkd.

S12 | S7  
1934

from which

A pine, 6 ins. diam., bears N.83 1/2°E., 53 lks. dist., mkd. 1/4 S7 BT.

A pine, 7 ins. diam., bears S.49°W., 11 lks. dist., mkd. 1/4 S12 BT.

Asc. 69 ft. over SE. slope.

47.50 Low ridge, bears NE. and SW.; desc. 12 ft. over NW. slope.

54.50 Change to SW. slope; asc. 40 ft.

72.30 Over flat divide, bears NW. and SE.; enter very scattering timber.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground, with a stone marked with cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 1, 6, 7 and 12, with brass cap mkd.

T14N  
R8E R9E  
S1 | S6  
S12 | S7  
1934

from which

A yellow pine, 10 ins. diam., bears N.74 1/2°E., 15 1/2 lks. dist., mkd. T14N R9E S6 BT.

A yellow pine, 18 ins. diam., bears S.66 1/2°E., 18 lks. dist., mkd. T14N R9E S7 BT.

No other suitable trees available.

Land: flat and rolling.

Soil: black adobe, 2nd rate.

Timber: pine, oak, juniper.

Undergrowth: sage, 2nd growth pine.

North, bet. secs. 1 and 6.

Asc. 10 ft. along gentle E. slope; through scattering pine and juniper timber and patches of 2nd growth.

Chains

- 13.50 Change to NE. slope; desc. 23 ft.
- 20.00 Head of drain, course SE.; asc. 102 ft. over SE. slope.
- 33.90 Spur, slopes E.; desc. 81 ft. over N. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$   
 S1 | S6  
 1934

from which

An oak, 6 ins. diam., bears S.69 $\frac{1}{4}$ °E., 20 lks. dist., mkd.  $\frac{1}{4}$  S6 BT.

A yellow pine, 6 ins. diam., bears S.73°W., 57 lks. dist., mkd.  $\frac{1}{4}$  S1 BT.

Desc. 30 ft. over N. slope.

47.50 Drain, course E.; asc. 110 ft. over SE. slope.

82.82 Intersect the S. bdy. of T.15 N., R.9 E.; at intersection

Set an iron post, 3 ft. long, 3 ins. diam., 28 ins. in the ground, for closing cor. of Tps. 14 N., Rs. 8 and 9 E., with brass cap mkd.

T15NR9E  
 S31  
 ---  
 S1 | S6  
 R8E | R9E  
 C C  
 T14N  
 1934

from which

A yellow pine, 14 ins. diam., bears S.72 $\frac{1}{2}$ °E., 94 lks. dist., mkd. T14N R9E S6 CC BT.

A white oak, 6 ins. diam., bears S.10 $\frac{1}{2}$ °W., 115 lks. dist., mkd. T14N R8E S1 CC BT.

From point of intersection the cor. of Tps. 15 N., Rs. 8 and 9 E., only, hereinbefore described, bears N.89°37'W., 19.15 chs. dist.; the  $\frac{1}{4}$  sec. cor. of sec. 31, only, hereinbefore described, bears S.89°37'E., 20.87 chs. dist.

Land: rolling.

Soil: black adobe, rocky, 2nd and 3rd rates.

Timber: pine, oak, juniper.

Undergrowth: sage, 2nd growth pine.

SURVEY OF

SUBDIVISIONS OF TOWNSHIP 14 NORTH, RANGE 9 EAST

From the cor. of secs. 35 and 36, only, on the S. bdy. of the Tp., established under this Group, described in Book "B",

N.0°09'W., paralleling mean E. bdy. of the Tp., bet. secs. 35 and 36.

SUBDIVISIONS OF T.14 N., R.9 E.

Chains


Asc. 20 ft. over gentle SE. slope; through medium growth of pine and oak timber and scattering undergrowth.

8.30 Low spur, slopes E.; over E. slope.

23.30 Change to S. slope; asc. 20 ft.

34.40 Low ridge, bears NW. and SE.; desc. 15 ft. along E. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 4 ins. in the ground, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.



from which

A pine, 5 ins. diam., bears N.  $27\frac{1}{2}^\circ$  E., 40 lks. dist., mkd.  $\frac{1}{4}$  S36 BT.

A pine, 7 ins. diam., bears N.  $18\frac{1}{2}^\circ$  W., 16 lks. dist., mkd.  $\frac{1}{4}$  S35 BT.

Asc. 39 ft. along E. slope.


58.20 Change to N. slope; desc. 58 ft.

65.30 Dim road, bears E. and W.

69.90 Swale, drains N.  $70^\circ$  E.; over E. slope.

77.00 Spur, slopes NE.; desc. 29 ft. over N. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, with brass cap mkd.



from which

An oak, 5 ins. diam., bears N.  $66\frac{1}{2}^\circ$  E., 109 lks. dist., mkd. T14N R9E S25 BT.

An oak, 20 ins. diam., bears S.  $52\frac{1}{2}^\circ$  E., 32 lks. dist., mkd. T14N R9E S36 BT.

An oak, 5 ins. diam., bears S.  $80^\circ$  W., 73 lks. dist., mkd. T14N R9E S35 BT.

An oak, 14 ins. diam., bears N.  $89\frac{1}{2}^\circ$  W., 129 lks. dist., mkd. T14N R9E S26 BT.

Land: rolling.  
Soil: volcanic, adobe, 3rd rate.  
Timber: yellow pine, oak.  
Undergrowth: 2nd growth pine and oak. Fair grass.

East, on random line, bet. secs. 25 and 36.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.06 A point 21 lks. S. of the cor. of secs. 25, 30, 31 and 36,



SUBDIVISIONS OF T.14 N., R.9 E.

BOOK 4031

Chains

on the E. bdy. of the Tp., hereinbefore described.

Thence.

S.89°51'W., on true line, bet. secs. 25 and 36.

Asc. 30 ft. along N. slope; through medium growth of pine and oak timber and scattering undergrowth.

0.40 Telephone line, bears NE. and SW.

8.29 Fence brs. NW. and SE.

13.30 Spur, slopes SE.; desc. 30 ft. along S. slope.

19.40 Cor. No.9 of H.E.S. No. 601 bears South, 12.82 chs. dist., a limestone, 16 x 12 x 4 ins. above ground, firmly set and mkd. and witnessed as described in the official record.

22.96 Fence, bears N.25°E. and S.25°W.

27.50 Wash, 30 lks. wide, course N.30°W.; asc. 70 ft. over E. slope.

28.00 Fred Back's house bears about 11 chs. S.

38.50 Low rise, bears NW. and SE.; over S. slope.

40.03 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground, and in a mound of stone to top, for 1/4 sec. cor., with brass cap mkd.

1/4 S25  
1/4 S36  
1934

from which

A pine, 6 ins. diam., bears N.59°E., 12 lks. dist., mkd. 1/4 S25 BT.

A pine, 8 ins. diam., bears S.54°E., 61 lks. dist., mkd. 1/4 S36 BT.

54.30 Fence, bears NW. and SE.

54.80 Swale, drains SE.; dim road in bottom; asc. 30 ft. over E. slope.

65.00 Change to gentle N. slope.

75.00 Top of rise, bears NE. and SW.; desc. slightly.

80.06 The cor. of secs. 25, 26, 35 and 36.

Land: gently rolling.  
Soil: adobe, 2nd rate.  
Timber: pine and oak.  
Undergrowth: 2nd growth pine. Fair grass.

N.0°09'W., bet. secs. 25 and 26.

Over gently rolling land; through medium growth of pine and oak timber and scattering undergrowth.


Desc. 76 ft. over gentle N. slope.

27.90 Road, bears SE. and W.

SUBDIVISIONS OF T.14 N., R.9 E.

Chains

- 36.90 Change to W. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in the ground, supported in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.




from which

A pine, 15 ins. diam., bears S.39 $\frac{1}{2}$ °E., 50 lks. dist., mkd.  $\frac{1}{4}$  S25 BT.

An oak, 8 ins. diam., bears S.57 $\frac{1}{2}$ °W., 127 lks. dist., mkd.  $\frac{1}{4}$  S26 BT.

Over W. slope; asc. slightly.



from which

A pine, 4 ins. diam., bears N.80 $\frac{1}{2}$ °E., 87 lks. dist., mkd. T14N R9E S24 BT.

A pine, 8 ins. diam., bears S.37 $\frac{1}{4}$ °E., 148 lks. dist., mkd. T14N R9E S25 BT.

A pine, 9 ins. diam., bears S.27 $\frac{3}{4}$ °W., 46 lks. dist., mkd. T14N R9E S26 BT.

A pine, 12 ins. diam., bears N.37 $\frac{1}{4}$ °W., 84 lks. dist., mkd. T14N R9E S23 BT.

Land: gently rolling.  
 Soil: adobe, 2nd and 3rd rates.  
 Timber: pine and oak.  
 Undergrowth: 2nd growth pine. Fair grass.

N.89°51'E., on random line, bet. secs. 24, and 25.

- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
  - 79.98 A point 23 lks. S. of the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp., hereinbefore described.
- Thence
- S.89°41'W., on true line, bet. secs. 24 and 25.

SUBDIVISIONS OF T.14 N., R.9 E.

Chains Desc. 16 ft. over gentle W. slope; through medium growth of pine and oak timber and scattering undergrowth.

0.80 Fence, bears N. and S.

0.90 Road, bears N. and S.

6.50 Drain, course NW. Asc. 61 ft. over E. slope.

10.20 Spur, slopes N.; desc. 76 ft. over W. slope.

22.50 Wash, 20 lks. wide, 2 ft. deep, course N.; asc. 76 ft. along general S. slope.

39.99 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S24  
 $\frac{1}{4}$ S25  
1934

from which

A pine, 14 ins. diam., bears N.  $7\frac{1}{4}^{\circ}$ E., 69 lks. dist., mkd.  $\frac{1}{4}$  S24 BT.

A pine, 10 ins. diam., bears S.  $73\frac{1}{2}^{\circ}$ W., 104 lks. dist., mkd.  $\frac{1}{4}$  S25 BT.

43.70 Low ridge, bears N.  $60^{\circ}$ E. and S.  $60^{\circ}$ W.; desc. slightly over N. slope.

53.70 Change to gentle NE. slope.

63.70 Low ridge, bears N. and S.; desc. 9 ft.

79.98 The cor. of secs. 23, 24, 25 and 26.

Land: gently rolling.  
Soil: adobe, 2nd and 3rd rate.  
Timber: pine and oak.  
Undergrowth: 2nd growth pine. Fair grass.

---

N.  $0^{\circ}09'$ W., bet. secs. 23 and 24.

Over gently rolling land; through medium pine and oak timber and scattering 2nd growth.

12.00 Low ridge, bears N.  $30^{\circ}$ W. and S.  $30^{\circ}$ E.; desc. 45 ft. along gentle E. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S23 | S24  
1934

from which

A pine, 18 ins. diam.; bears N.  $40\frac{1}{4}^{\circ}$ E.; 111 lks. dist., mkd.  $\frac{1}{4}$  S24 BT.

A pine, 18 ins. diam., bears S.  $44\frac{1}{2}^{\circ}$ W., 74 lks. dist., mkd.  $\frac{1}{4}$  S23 BT.

Desc. 11 ft. over gentle N. slope.

50.00 Swale, drains NE.; asc. 18 ft. along gentle E. slope.

SUBDIVISIONS OF T.14 N., R.9 E.

Chains  
64.97 Line tree, a pine, 8 ins. diam. low. in 25.00  
73.00 Change to N. slope; desc. 48 ft.  
79.85 Wash, 15 lks. wide, 2 ft. deep, course NW.  
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 13, 14, 23 and 24, with brass cap mkd.

T14N R9E

S14 S13

S23 S24

1934

from which

A pine, 12 ins. diam., bears N. 61° E., 111 lks. dist., mkd. T14N R9E S13 BT.

A pine, 6 ins. diam., bears S. 22½° E., 18 lks. dist., mkd. T14N R9E S24 BT.

A pine, 6 ins. diam., bears S. 74½° W., 79 lks. dist., mkd. T14N R9E S23 BT.

A pine, 14 ins. diam., bears N. 32½° W., 142 lks. dist., mkd. T14N R9E S14 BT.

Land: gently rolling.

Soil: adobe, 2nd rate.

Timber: pine, oak, juniper.

Undergrowth: 2nd growth pine. Fair grass.

N. 89° 41' E., on random line, bet. secs. 13 and 24.

40.00 Set temp. ¼ sec. cor.

79.82 Intersect the cor. of secs. 13 and 24, only, on the E. bdy. of the Tp., hereinbefore described.

Thence

S. 89° 41' W., on true line, bet. secs. 13 and 24.

Desc. 38 ft. over gentle W. slope; through medium growth of pine, oak and juniper timber and scattering undergrowth.

6.80 Swale, drains NW.; asc. 40 ft. over E. slope.

9.90 Point of spur, slopes SE.; over S. slope.

13.00 Wire fence, bears SE. and NW.

16.70 Low spur, slopes NE.; desc. 15 ft. along W. slope.

25.00 Small wash, course N.; asc. 40 ft. over E. slope.

29.20 Dim road, bears N. and S.

35.20 Low spur, slopes N.; desc. 36 ft. over W. slope.

39.91 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground, and in a mound of stone to top, for ¼ sec. cor., with brass cap mkd.

Chains

$\frac{1}{4}$  S13  
 $\frac{1}{4}$  S24  
 1934

from which

A pine, 8 ins. diam., bears N.20 $\frac{1}{2}$ °E., 29 lks. dist.,  
 mkd.  $\frac{1}{4}$  S13 BT.

A pine, 14 ins. diam., bears S.7°E., 37 lks. dist.,  
 mkd.  $\frac{1}{4}$  S24 BT.

Desc. 18 ft. over W. slope.

41.50 Wash, 10 lks. wide, course N.; asc. 45 ft. over E. slope.

47.70 Low spur, slopes NE.; over N. slope.

56.20 Low ridge, bears N. and S.; desc. 77 ft. over NW. slope.

73.30 Drain, course SW.; asc. 39 ft. over SW. slope.

76.70 Enter drain, from SE.

78.70 Leave same, course SW.

79.82 The cor. of secs. 13,14,23 and 24.

Land: rolling.  
 Soil: adobe, 2nd rate.  
 Timber: pine, juniper, oak.  
 Undergrowth: 2nd growth pine. Fair grass.

N.0°09'W., bet. secs. 13 and 14.

Over rolling land; through medium growth of pine, fir and  
 oak timber and scattering 2nd growth pine.

1.00 Leave bottom of swale; asc. 73 ft. over S. slope.

14.50 Spur, slopes W.; over general W. slope.

27.50 Low ridge, bears N.20°W. and SE.; desc. slightly over gentle  
 E. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap. mkd.

$\frac{1}{4}$  S14 | S13  
 1934

from which

A pine, 14 ins. diam., bears N.50 $\frac{1}{2}$ °E., 107 lks. dist.,  
 mkd.  $\frac{1}{4}$  S13 BT.

A pine, 8 ins. diam., bears N.88°W., 97 lks. dist.,  
 mkd.  $\frac{1}{4}$  S14 BT.

Desc. 62 ft. over gentle NE. slope.

54.50 Drain, near head, course N.25°W.; desc. 33 ft. along W.  
 slope.

58.30 Drain, near mouth, course W.; asc. 21 ft. over SW. slope.

62.40 Short spur, slopes W.; desc. 57 ft. over NW. slope.

SUBDIVISIONS OF T.14 N., R.9 E.

Chains	<p>68.00 Enter wash, 50 lks. wide, course S.15°W., soon W.</p> <p>72.80 Leave same, from N.15°E.; asc. 80 ft. over SE. slope.</p> <p>80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground, and in a mound of stone to top, for cor. of secs. 11, 12, 13 and 14, with brass cap mkd.</p>				
	<p>T14NR9E</p> <table border="1" style="margin: auto;"> <tr> <td>S11</td> <td>S12</td> </tr> <tr> <td>S14</td> <td>S13</td> </tr> </table> <p>1934</p>	S11	S12	S14	S13
S11	S12				
S14	S13				
	from which				
	<p>A pine, 22 ins. diam., bears N.2¼°E., 57 lks. dist., mkd. T14N R9E S12 BT.</p> <p>A pine, 4 ins. diam., bears S.74½°E., 35 lks. dist., mkd. T14N R9E S13 BT.</p> <p>A pine, 4 ins. diam., bears S.69½°W., 45 lks. dist., mkd. T14N R9E S14 BT.</p> <p>A pine, 4 ins. diam., bears N.30½°W., 25 lks. dist., mkd. T14N R9E S11 BT.</p> <p>Land: rolling. Soil: adobe, rocky, 3rd rate. Timber: yellow pine, oak, juniper. Undergrowth: 2nd growth pine.</p>				
	<p>N.89°41'E., on random line, bet. secs. 12 and 13.</p>				
40.00	Set temp. ¼ sec. cor.				
79.80	A point 3 lks. S. of the cor. of secs. 12 and 13, only, on the E. bdy. of the Tp., hereinbefore described.				
	Thence				
	S.89°40'W., on true line, bet. secs. 12 and 13.				
	Over gentle N. slope; through scattering large yellow pine timber and medium undergrowth.				
4.40	Flat ridge, bears NW. and SE.; desc. 97 ft. over SW. slope.				
20.60	Short ravine, course NW.; asc. 50 ft. over NE. slope.				
24.40	Spur, slopes N.; desc. 76 ft. over NW. slope.				
29.70	Wash, 50 lks. wide, course N.75°W.				
36.00	Same wash, course SW.; asc. 104 ft. over SE. slope.				
39.90	Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, and in a mound of stone to top, for ¼ sec. cor., with brass cap mkd.				
	<p>S12</p> <p>S13</p> <p>1934</p>				
	from which				
	A pine, 15 ins. diam., bears S.27°E., 90 lks. dist.,				

SUBDIVISIONS OF T.14 N., R.9 E.

Chains

mkd. 1/4 S13 BT.

A pine, 15 ins. diam., bears N.11 1/2°W., 23 lks. dist., mkd. 1/4 S12 BT.

Asc. 9 ft. over SE. slope.

41.70 Spur, slopes S.25°W.; desc. 68 ft. over NW. slope.

49.70 Wash, 5 lks. wide, course SW.; asc. 52 ft. over SE. slope.

54.80 Wire fence, bears S.25°E. and N.25°W.

57.30 Spur, slopes S.; desc. 83 ft. over W. slope.

62.90 Wash, 3 lks. wide, in draw, 50 lks. wide, course SW.; asc. 71 ft. over SE. slope.

69.00 Change to SW. slope; desc. 37 ft.

74.10 Change to SE. slope; asc. 26 ft.

79.80 The cor. of secs. 11,12,13 and 14.

Land: rolling, and gently rolling.  
Soil: adobe, 2nd and 3rd rates.  
Timber: yellow pine and oak.  
Undergrowth: 2nd growth of same.

N.0°09'W., bet. secs. 11 and 12.

Asc. 105 ft. over SE. slope; through medium growth of pine and juniper timber and scattering undergrowth.

8.60 Enter open area, bears 3 chs. E. and 7 chs. W.

15.50 Leave same.

15.60 Low ridge, bears E. and W.; desc. 36 ft. over NW. slope.

26.10 Fence, bears NW. and SE.

27.00 Head of ravine, course NE.; asc. 30 ft. along E. slope.

34.00 Telephone line, bears S.35°W. and NE., soon N.

37.40 Spur, slopes NE.; over gentle W. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.

S11 | S12

1934

from which

A pine, 7 ins. diam., bears S.88 1/2°E., 33 lks. dist., mkd. 1/4 S12 BT.

A pine, 15 ins. diam., bears S.26°38'W., 116 lks. dist., mkd. 1/4 S11 BT.

65.00 Change to gentle E. slope.

74.10 Fence, bears N.30°E. and S.30°W.

38

## SUBDIVISIONS OF T.14 N., R.9 E.

Chains 80.00	Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 1, 2, 11 and 12, with brass cap mkd. T14N R9E S1 BT.  T14NR9E S2   S1 S11   S12 1934  from which  A pine, 6 ins. diam., bears N. 47 $\frac{1}{2}$ ° E., 79 lks. dist., mkd. T14N R9E S1 BT. A pine, 6 ins. diam., bears S. 33 $\frac{1}{2}$ ° E., 48 lks. dist., mkd. T14N R9E S12 BT. A pine, 6 ins. diam., bears S. 47 $\frac{1}{2}$ ° W., 55 lks. dist., mkd. T14N R9E S11 BT. A pine, 11 ins. diam., bears N. 79° W., 52 lks. dist., mkd. T14N R9E S2 BT.  Land: flat and rolling. Soil: adobe, 2nd rate. Timber: yellow pine, juniper. Undergrowth: 2nd growth pine, Fair grass.
40.00	N. 89° 40' E., on random line, bet. secs. 1 and 12. Set temp. $\frac{1}{2}$ sec. cor.
79.80	A point 12 lks. N. of the cor. of secs. 1 and 12, only, on the E. bdy. of the Tp., hereinbefore described. Thence S. 89° 45' W., on true line, bet. secs. 1 and 12. Over gently rolling land; through medium growth of pine and juniper timber and patches of 2nd growth.
0.20	Drain, 1 course irregularly br.; asc. 11 ft. over E. slope.
2.90	Highway (under re-location), bears N. to Flagstaff and S. to Pine and Payson.
3.40	Low rise, bears N. and S.; asc. 29 ft. over gentle S. slope.
39.90	Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.  S 1 S12 1934  from which  A pine, 16 ins. diam., bears N. 50 $\frac{1}{2}$ ° E., 30 lks. dist., mkd. $\frac{1}{4}$ S1 BT. A pine, 12 ins. diam., bears S. 54 $\frac{1}{2}$ ° W., 59 lks. dist., mkd. $\frac{1}{4}$ S12 BT.  Asc. 18 ft. along gentle S. slope.
55.00	Low ridge, bears NE. and SW.; desc. 18 ft. along N. slope.



SUBDIVISIONS OF T.14 N., R.9 E.

Chains	
77.50	Fence, bears N.30°E. and S.30°W.
79.80	The cor. of secs. 1, 2, 11 and 12. Land: gently rolling. Soil: adobe, 2nd rate. Timber: yellow pine, oak, juniper. Undergrowth: 2nd growth pine.
-----	
	N.0°09'W., bet. secs. 1 and 2. Desc. 30 ft. over gentle NE. slope; through medium growth of pine and juniper timber and scattering undergrowth.
12.00	Drain, near head, course N.20°W.; enter open area, bears E. and W.; over W. slope.
20.50	Enter shallow wash, 30 lks. wide, course S.80°W.
21.80	Leave same, from NE.; leave open area, bears NE. and SW.; asc. 98 ft. over S. slope.
38.00	Ridge, bears E. and W.; desc. slightly.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground, for 1/2 sec. cor., with brass cap mkd.
	S2   S1 1934
	from which.
	A pine, 6 ins. diam., bears N.12 1/2°E., 73 lks. dist., mkd. 1/4 S1 BT.
	A pine, 14 ins. diam., bears S.62°W., 21 lks. dist., mkd. 1/4 S2 BT.
	Desc. 31 ft. over N. slope.
50.10	Swale, drains NW.; asc. 20 ft. along SW. slope.
56.20	Fence, bears N.55°E. and S.55°W.
58.40	Spur, slopes SW.; desc. 82 ft. over N. slope.
65.20	Enter shallow wash, 40 lks. wide, course NW.
66.50	Leave same; asc. 30 ft. over S. slope.
75.20	Highway (being re-built) bears SE. to Pine and Bayson and W. to Flagstaff.
82.04	Intersect the S. bdy. of T.15 N., R.9 E. At intersection Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. of secs. 1 and 2, with brass cap mkd.
	T15NR9E S35 S2   S1 T14NR9E C C 1934
	from which

SUBDIVISIONS OF T.14 N., R.9 E.

Chains	
	A pine, 16 ins. diam., bears S.28 $\frac{1}{2}$ °E., 24 lks. dist., mkd. T14N R9E S1 CC BT.
	A pine, 16 ins. diam., bears S.36°W., 40 lks. dist., mkd. T14N R9E S2 CC BT.
	From point of intersection the cor. of secs. 35 and 36, only, bears East, 1.84 chs. dist.; the $\frac{1}{4}$ sec. cor. of sec. 35, only, bears West, 38.21 chs. dist.; both here-inbefore described.
	Land: gently rolling. Soil: adobe, 2nd rate. Timber: pine, oak, juniper. Undergrowth: 2nd growth pine. Fair grass.
	-----
	From the cor. of secs. 34 and 35, only, on the S. bdy. of the Tp., established under this Group, described in Book "B", N.0°09'W., bet. secs. 34 and 35.
	Over rolling land; through heavy pine, oak and juniper timber and scattering undergrowth. Asc. 23 ft. over S. slope.
3.30	Spur, slopes SW.; desc. 80 ft. over NW. slope.
8.00	Ravine, course S.75°W.; asc. 117 ft. over S. slope.
16.70	Spur, slopes SW.; desc. 51 ft. over NW. slope.
21.70	Ravine, course SW.; asc. 68 ft. over S. slope.
27.50	Over top of flat ridge, bears NW. and SE.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd. S34 S35 1934 from which
	A pine, 10 ins. diam., bears N.21 $\frac{1}{2}$ °E., 33 lks. dist., mkd. $\frac{1}{4}$ S35 BT.
	A pine, 9 ins. diam., bears S.46 $\frac{1}{2}$ °W., 76 lks. dist., mkd. $\frac{1}{4}$ S34 BT.
	Desc. 12 ft. along gentle E. slope.
46.50	Head of draw, course NE.
52.00	Short spur, slopes E.; desc. 54 ft. along E. slope.
64.80	Ravine, near head, course NE.; asc. slightly.
67.30	Short spur, slopes E.; desc. 34 ft. over N. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 26, 27, 34 and 35, with brass cap mkd.

Chains

T14N R9E

S27	S26
S34	S35

1934

from which

A pine, 12 ins. diam., bears N.60°E., 46 lks. dist., mkd. T14N R9E S26 BT.

A pine, 15 ins. diam., bears S.33½°E., 18 lks. dist., mkd. T14N R9E S35 BT.

A pine, 12 ins. diam., bears S.85°W., 4 lks. dist., mkd. T14N R9E S34 BT.

A pine, 9 ins. diam., bears N.7°W., 82 lks. dist., mkd. T14N R9E S27 BT.

Land: rolling.

Soil: Adobe; limestone, 2nd and 3rd rates.

Timber: pine, oak.

Undergrowth: 2nd growth pine. Fair grass.

East, on random line, bet. secs. 26 and 35.

40.00 Set temp. ¼ sec. cor.

79.86 Intersect the cor. of secs. 25, 26, 35 and 36.

Thence

West, on true line, bet. secs. 26 and 35.

Asc. 26 ft. along gentle N. slope; through medium pine and oak timber and patches of 2nd growth.

28.00 Short spur, slopes NW.; desc. 61 ft. over SW. slope.

39.93 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, and in a mound of stone to top, for ¼ sec. cor., with brass cap mkd.

1/4 S26
S35

1934

from which

A yellow pine, 12 ins. diam., bears N.35½°E., 37 lks. dist., mkd. ¼ S26 BT.

A yellow pine, 10 ins. diam., bears S.49½°W., 59 lks. dist., mkd. ¼ S35 BT.

Desc. 250 ft. over general SW. slope.

74.00 Canyon, wash, 20 lks. wide, 2 ft. deep, course NW.; asc. 34 ft. over NE. slope.

79.86 The cor. of secs. 26, 27, 34 and 35.

Land: rolling.

Soil: adobe, 2nd and 3rd rates.

Timber: pine and oak.

Undergrowth: same. Fair grass.

## SUBDIVISIONS OF T.14 N., R.9 E.

## Chains

N.0°09'W., bet. secs. 26 and 27.

Desc. 78 ft. over N. slope; through medium pine and oak timber and patches of undergrowth.

4.30 Canyon, wash, 20 lks. wide, 2 ft. deep, course S.65°W.; asc. 183 ft. over general SW. slope, to 26.90 chs.

5.70 Short spur, slopes SW.

7.30 Short ravine, course S.30°W.

8.50 Short spur, slopes SW.

9.90 Ravine, course SW.

26.90 Spur, slopes SW.; over W. slope.

35.50 Change to S. slope; asc. 40 ft.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, supported in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S27 | S26

1934

from which

An oak, 5 ins. diam., bears S.55 $\frac{1}{4}$ °E., 80 lks. dist., mkd.  $\frac{1}{4}$  S26 BT.

An oak, 5 ins. diam., bears N.56 $\frac{1}{2}$ °W., 31 lks. dist., mkd.  $\frac{1}{4}$  S27 BT.

Asc. 17 ft. over S. slope.

43.00 Over top of flat ridge, bears W. and SE.

61.00 Leave same; desc. 70 ft. over N. slope.

77.35 Wire fence, bears NW. and SE.

78.50 Drain, 10 lks. wide, course NW.; asc. 6 ft.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground, and in a mound of stone to top, for cor. of secs. 22, 23, 26 and 27, with brass cap mkd.

T14NR9E

S22 | S23

S27 | S26

1934

from which

A pine, 6 ins. diam., bears N.76 $\frac{1}{2}$ °E., 92 lks. dist., mkd. T14N R9E S23 BT.

A pine, 18 ins. diam., bears S.44°22'E., 118 lks. dist., mkd. T14N R9E S26 BT.

An oak, 8 ins. diam., bears S.21 $\frac{1}{2}$ °W., 69 lks. dist., mkd. T14N R9E S27 BT.

An oak, 10 ins. diam., bears N.58°W., 69 lks. dist., mkd. T14N R9E S22 BT.

SUBDIVISIONS OF T.14 N., R.9 E.

BOOK 4031

Chains	<p>Land: rolling.          Soil: adobe, rocky, 3rd rate.          Timber: pine, juniper, gamble oak.          Undergrowth: 2nd growth pine. Fair grass.</p> <hr/> <p>East, on random line, bet. secs. 23 and 26.</p> <p>40.00 Set temp. <math>\frac{1}{4}</math> sec. cor.</p> <p>79.82 A point 4 lks. N. of the cor. of secs. 23, 24, 25 and 26.</p> <p>Thence</p> <p>N. 89° 58' W., on true line, bet. secs. 23 and 26.</p> <p>Over rolling N. slope; through medium pine and oak timber and scattering undergrowth.</p> <p>2.50 Low spur, slopes N. 60° W.; desc. 18 ft. along S. slope.</p> <p>17.30 Wash, 10 lks. wide, <math>1\frac{1}{2}</math> ft. deep, course NW., soon N.</p> <p>20.50 Drain, course N. 30° E.; asc. 47 ft. over E. slope.</p> <p>30.40 Low ridge, bears NE. and S. 20° W.; desc. slightly.</p> <p>39.91 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, supported in a mound of stone, for <math>\frac{1}{4}</math> sec. cor., with brass cap mkd.</p> <p style="text-align: center;"><math>\frac{1}{4}</math> <math>\frac{323}{26}</math></p> <p style="text-align: center;">1934</p> <p style="text-align: right;">from which</p> <p>A pine, 9 ins. diam., bears S. 52° E., 38 lks. dist., mkd. <math>\frac{1}{4}</math> S26 BT.</p> <p>A pine, 10 ins. diam., bears N. 65<math>\frac{1}{4}</math>° W., 91 lks. dist., mkd. <math>\frac{1}{4}</math> S26 BT.</p> <p>50.20 Dim old road, bears NW. and SE.</p> <p>55.00 Begin ascent of 60 ft. along N. slope.</p> <p>64.60 Low ridge, bears NW. and SE.; desc. 64 ft. over W. slope.</p> <p>79.82 The cor. of secs. 22, 23, 26 and 27.</p> <p>Land: gently rolling.          Soil: adobe, 2nd and 3rd rates.          Timber: pine, juniper, oak.          Undergrowth: 2nd growth pine. Fair grass.</p> <hr/> <p>N. 0° 09' W., bet. secs. 22 and 23.</p> <p>Asc. 71 ft. over SW. slope; through medium pine, oak and juniper timber and patches of 2nd growth.</p> <p>14.00 Ridge, bears NW. and SE.; desc. 146 ft. over N. slope.</p> <p>24.21 Line tree, a pine, 26 ins. diam.</p> <p>31.60 Dim road, bears NW. and SE.</p>
--------	--

SUBDIVISIONS OF T.14 N., R.9 E.

Chains	
37.70	Wash, 5 lks. wide, course NW.; over W. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	<p style="text-align: center;"> <math>\frac{1}{4}</math>        S22 S23        1934        from which     </p>
48.50	A pine, 30 ins. diam., bears N.85 $\frac{1}{2}$ °E., 65 lks. dist., mkd. $\frac{1}{4}$ S23 BT.
51.00	A pine, 6 ins. diam., bears N.5 $\frac{1}{2}$ °W., 129 lks. dist., mkd. $\frac{1}{4}$ S22 BT.
	Asc. 18 ft. over SW. slope.
50.00	Change to NW. slope; desc. 28 ft.
53.00	Ravine, course W.; asc. 46 ft. over S. slope.
70.00	Spur, slopes N.30°W.; desc. 67 ft. over NE. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, and in a mound of stone to top, for cor. of secs. 14, 15, 22 and 23, with brass cap mkd.
	<p style="text-align: center;">       T14NR9E        S15 S14        S22 S23        1934        from which     </p>
81.00	A pine, 13 ins. diam., bears N.12°E., 89 lks. dist., mkd. T14N R9E S14 BT.
82.00	A pine, 14 ins. diam., bears S.81 $\frac{1}{2}$ °E., 72 lks. dist., mkd. T14N R9E S23 BT.
83.00	A pine, 20 ins. diam., bears S.58 $\frac{1}{2}$ °W., 100 lks. dist., mkd. T14N R9E S22 BT.
84.00	A pine, 15 ins. diam., bears N.29 $\frac{1}{2}$ °W., 53 lks. dist., mkd. T14N R9E S15 BT.
	Land: gently rolling. Soil: adobe, 3rd rate. Timber: pine, juniper, oak. Undergrowth: 2nd growth pine. Fair grass.
	S.89°58'E., on random line, bet. secs. 14 and 23.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.00	A point 5 lks. S. of the cor. of secs. 13, 14, 23 and 24. Thence
	West, on true line, bet. secs. 14 and 23.
	Over rolling land; through medium pine, oak and juniper timber and patches of 2nd growth.
0.15	Wash, 15 lks. wide, course NW.; asc. 12 ft.

Chains	
5.00	Change to W. slope; desc. 15 ft.
7.30	Enter swale, drains NW.
10.20	Leave same; asc. 41 ft. along N. slope.
16.10	Spur, slopes NW.; desc. 28 ft.
23.80	Drain, course NW.; asc. 23 ft.
29.10	Spur, slopes NW.; desc. 70 ft. over SW. slope.
39.66	(34 lks. E. of true point) Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, supported in a mound of stone, for witness cor. to $\frac{1}{4}$ sec. cor., with brass cap mkd.
WC $\frac{1}{4}$ $\frac{S14}{S23}$ 1934	
from which	
A pine, 20 ins. diam., bears N.11 $\frac{1}{2}$ °E., 58 lks. dist., mkd. WC $\frac{1}{4}$ S14 BT.	
A pine, 15 ins. diam., bears S.10 $\frac{1}{2}$ °E., 62 lks. dist., mkd. WC $\frac{1}{4}$ S23 BT.	
40.00	True point for $\frac{1}{4}$ sec. cor. falls in wash, 20 lks. wide, course N.30°W.
Asc. 77 ft. over E. slope.	
46.00	Low ridge, bears NW. and SE.; desc. 30 ft. along S. slope.
56:40	Drain, course N.65°W.; asc. 12 ft.
71.00	Spur, slopes NW.; desc. 61 ft. over SW. slope.
79.00	Ravine, course N.65°W.; asc. 5 ft.
80.00	The cor. of secs. 14,15,22 and 23.
Land: rolling. Soil: adobe, 2nd and 3rd rate. Timber: pine, oak, juniper. Undergrowth: 2nd growth pine. Fair grass.	
-----	
N.0°09'W., bet. secs. 14 and 15.	
Desc. 12 ft. over N. slope; through medium pine, juniper and oak timber and patches of 2nd growth pine.	
0.50	Ravine, course NW.; asc. 49 ft. over SW. slope.
5.64	Spur, slopes NW.; desc. 139 ft. over NE. slope.
13.60	Short ravine, course N.25°W.; desc. 22 ft. along W. slope.
16.30	Willow Creek, dry bed, 80 lks. wide, course SW., soon W.; asc. 109 ft. over S. slope.
21.20	Short spur, slopes SW.; asc. 46 ft. along W. slope.
28.60	Same spur, slopes S.30°E.; asc. 41 ft. along E. slope.
30.20	Fence, bears NE. and SW.

## SUBDIVISIONS OF T.14 N., R.9 E.

Chains	
36.10	Change to S. slope; asc. 21 ft.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, supported in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4}$ S15   S14 1934
	from which
	A pine, 6 ins. diam., bears N.50 $\frac{1}{2}$ °E., 100 lks. dist., mkd. $\frac{1}{4}$ S14 BT.
	A pine, 26 ins. diam., bears S.69°W., 59 lks. dist., mkd. $\frac{1}{4}$ S15 BT.
	Cor. stands on spur, slopes N.60°E.
	Desc. 114 ft. over N. slope.
50.60	Telephone line, bears N.80°E. and S.80°W.
57.00	Ravine, course E.; asc. 51 ft. over S. slope.
61.50	Short spur, slopes SE.; desc. 40 ft. along general E. slope.
66.50	Change to S. slope; asc. 13 ft.
68.20	Short spur, slopes E.; desc. 56 ft. over N. slope.
69.70	Wash, 25 lks. wide, course SE.; asc. 148 ft. over S. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground, and in a mound of stone to top, for cor. of secs. 10, 11, 14 and 15, with brass cap mkd.
	T14NR9E S10   S11 S15   S14 1934
	from which
	A pine, 4 ins. diam., bears N.33°22'E., 81 lks. dist., mkd. BT.
	A pine, 26 ins. diam., bears S.51°E., 87 lks. dist., mkd. T14N R9E S14 BT.
	A pine, 26 ins. diam., bears S.9°39'W., 124 lks. dist., mkd. T14N R9E S15 BT.
	A pine, 28 ins. diam., bears N.61°07'W., 83 lks. dist., mkd. T14N R9E S10 BT.
	Land: rolling and broken.
	Soil: rocky adobe, 3rd rate.
	Timber: pine, oak, juniper.
	Undergrowth: 2nd growth pine.



SUBDIVISIONS OF T.14 N., R.9 E.

Chains

East, on random line, bet. secs. 11 and 14.

40.00 Set temp.  $\frac{1}{2}$  sec. cor.

79.90 A point 9 lks. N. of the cor. of secs. 11,12,13 and 14.

Thence

N.89°56'W., on true line, bet. secs. 11 and 14.

Asc. 68 ft. over E. slope; through medium growth of pine oak and juniper timber and scattering undergrowth.

4.50 Change to S. slope.

15.00 Change to SW. slope; desc. 30 ft.

28.90 Head of ravine, course SE.; asc. 23 ft. over E. slope.

35.00 Ridge, bears NE. and S.; desc. slightly over W. slope.

39.87 Telephone line NE. and SW.

39.95 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$ S11  
 $\frac{1}{4}$ S14  
1934

from which

A pine, 14 ins. diam., bears N.61°E., 78 lks. dist., mkd.  $\frac{1}{4}$  S11 BT.

A pine, 22 ins. diam., bears S.58 $\frac{1}{2}$ °E., 51 lks. dist., mkd.  $\frac{1}{4}$  S14 BT.

Desc. 225 ft. over W. slope.

40.24 Wire fence, bears NE. and SW.

69.90 Willow Creek, dry channel, 130 lks. wide, course irregularly S.; asc. 192 ft. over E. slope.

76.00 Top of ascent; over S. slope.

79.90 The cor. of secs. 10,11,14 and 15.

Land: rolling.  
Soil: adobe, 2nd and 3rd rates.  
Timber: pine, oak, juniper.  
Undergrowth: 2nd growth pine, sage.

N.0°09'W., bet. secs. 10 and 11.

Over flat; through medium growth of pine, oak and juniper and scattering undergrowth.

11.29 Line tree, a pine, 18 ins. diam.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$   
S10 | S11  
1934

from which

## SUBDIVISIONS OF T.14 N., R.9 E.

Chains									
	A pine, 24 ins. diam., bears S.80°37'E., 86 lks. dist., mkd. $\frac{1}{4}$ S11 BT.								
	A pine, 28 ins. diam., bears N.52°W., 50 lks. dist., mkd. $\frac{1}{4}$ S10 BT.								
	Asc. 15 ft. over gentle S. slope.								
57.30	Low divide, bears SE. and W.; desc. 12 ft.								
67.00	Change to gentle S. slope; asc. 21 ft.								
77.30	Low ridge, bears E. and W.								
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 2, 3, 10 and 11, with brass cap mkd.								
	<table border="1" style="margin: auto;"> <tr><td colspan="2">T14NR9E</td></tr> <tr><td>S3</td><td>S2</td></tr> <tr><td>S10</td><td>S11</td></tr> <tr><td colspan="2">1934</td></tr> </table>	T14NR9E		S3	S2	S10	S11	1934	
T14NR9E									
S3	S2								
S10	S11								
1934									
	from which								
	A pine, 28 ins. diam., bears N.41°52'E., 113 lks. dist., mkd. T14N R9E S2 BT.								
	A pine, 16 ins. diam., bears S.13 $\frac{1}{2}$ °E., 82 lks. dist., mkd. T14N R9E S11 BT.								
	A pine, 16 ins. diam., bears S.74 $\frac{1}{2}$ °W., 63 lks. dist., mkd. T14N R9E S10 BT.								
	A pine, 16 ins. diam., bears N.36 $\frac{1}{2}$ °W., 53 lks. dist., mkd. T14N R9E S3 BT.								
	Land: flat and gently rolling. Soil: adobe, 2nd rate. Timber: pine, juniper, oak. Undergrowth: 2nd growth pine, sage.								
	S.89°56'E., on random line, bet. secs. 2 and 11.								
40.00	Set temp. $\frac{1}{2}$ sec. cor.								
79.84	A point 5 lks. S. of the cor. of secs. 1, 2, 11 and 12.								
	Thence								
	N.89°58'W., on true line, bet. secs. 2 and 11.								
	Asc. 12 ft. over gentle E. slope; through medium pine, oak and juniper timber and scattering undergrowth.								
7.50	Low spur, slopes NE.; desc. 73 ft. over W. slope.								
21.70	Willow Creek, water in pools in wash, 25 lks. wide, course S.70°W.; asc. 43 ft. over SE. slope.								
26.90	Short spur, slopes S.; desc. 47 ft. over SW. slope.								
33.40	Same creek, course NW.; asc. 49 ft. over NE. slope.								
36.80	Short spur, slopes N.; desc. 7 ft. over NW. slope.								

Chains

39.92

Set an iron post, 3 ft. long, 1 in. diam., 4 ins. in the ground and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$  S2  
S11

1934:

from which

A pine, 15 ins. diam., bears N.74 $\frac{1}{2}$ °E., 73 lks. dist., mkd.  $\frac{1}{4}$  S2 BT.

A pine, 4 ins. diam., bears S.64°W., 62 lks. dist., mkd.  $\frac{1}{4}$  S11 BT.

Desc. 43 ft. over NW. slope.

43.20 Willow Creek, water in pools in wash, 25 lks. wide, course S.65°W.; asc. 71 ft. over SE. slope.

54.00 Over flat, bears NW. and S.; over S. slope.

79.84 The cor. of secs. 2,3,10 and 11.

Land: rolling and flat.  
Soil: adobe, 2nd rate.  
Timber: pine, juniper oak.  
Undergrowth: 2nd growth pine, sage.

N.0°09'W., bet. secs. 2 and 3.

Over gently rolling land; through scattering pine timber and 2nd growth of same.

17.72 Wire fence, bears N.86°20'E. and S.86°20'W.

17.73 Intersect the 2-3 line of H.E.S. No.175 at a point 26.45 chs. S.86°22'W. of its cor. No.2, which is a lava stone, 16 x 12 x 10 above ground, firmly set and mkd. and witnessed as described in the official record.  
Cor. No. 3, a stone, 12 x 10 x 10 ins. above ground, firmly set and mkd. and witnessed as described in the official record, bears S.86°22'W., 25.07 chs. dist. from point of intersection. Over patented land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S3 | S2

1934

and raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

No bearing trees are available.

SW. cor. of house bears N.2 $\frac{1}{4}$ °E., 10.36 chs. dist.

SW. cor. of barn bears N.43°22'E., 8.00 chs. dist.

52.20 Intersect the 1-4 line of H.E.S. No.175 at a point 1.23 chs. N.89°04'W. of its cor. No.1, which is a sandstone, 10 x 10 x 5 ins. above ground, firmly set and mkd. and witnessed as described in the official record.  
Cor. No.4, a stone, 12 x 10 x 10 ins. above ground, firmly set and mkd. and witnessed as described in the

SUBDIVISIONS OF T.14 N., R.9 E.

Chains	
	official record, bears N.89°04'W., 25.01 chs. from point of intersection. Leave patented land.
52.23	Wire fence, bears E. and W.
52.76	Road, bears S.80°W. and NE.
56.00	Road, bears SW. and E.; asc. 30 ft. over gentle S. slope.
82.01	Intersect the S. bdy. of T.15 N., R.9 E. At intersection Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for closing cor. of secs. 2 and 3, with brass cap mkd.
	<p>T15NR9E            S34            S3   S2            C C            R9E            T14N            1934</p>
	from which
	An oak, 12 ins. diam., bears S.50°E., 37 lks. dist., mkd. T14N R9E S2 CC BT.
	A pine, 17 ins. diam., bears S.27°W., 40 lks. dist., mkd. T14N R9E S3 BC BT.
	From point of intersection the cor. of secs. 34 and 35, only, hereinbefore described, bears East, 1.52 chs. dist.; the 1/4 sec. cor. of sec. 34, only, hereinbefore described, bears West, 43.99 chs. dist.
	Land: flat and gently rolling. Soil: adobe, 2nd rate. Timber: pine, oak, juniper. Undergrowth: 2nd growth pine, sage.
	From the cor. of secs. 33 and 34, only, on the S. bdy. of the Tp., established under this Group, described in Book "B" N.0°10'W., bet. secs. 33 and 34.
	Over rolling and mountainous land; through medium pine, fir and oak timber and scattering undergrowth. Asc. 285 ft. over SW. slope.
11.15	Rim of Clear Creek canyon, bears NW. and S.25°E.
13.00	Ridge, bears NW. and SE.
13.50	Old road, bears NW. and SE.; desc. 170 ft. over NE. slope.
27.60	Ravine, course NW.; asc. 32 ft. along W. slope.
34.60	Short spur, slopes NW.; desc. 43 ft.
36.64	(3.36 chs. S.0°10'E. of true point) Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground and in a mound of stone to top, for witness cor. to 1/4 sec. cor., with brass cap mkd.

Chains

1/4	
W	C
S33	S34
1934	

from which

A pine, 12 ins. diam., bears N.66 1/2°E., 9 lks. dist., mkd. WC 1/4 S34 BT.

A pine, 12 ins. diam., bears S.63°W., 15 lks. dist., mkd. WC 1/4 S33 BT.

37.00 Rim of Willow Creek canyon, bears NE. and SW.; desc. 500 ft. over cliffs and general N. slope.

40.00 True point for 1/4 sec. cor. falls among broken cliffs, a point difficult of access.

45.70 Willow Creek, stream 30 lks. wide, 3 ins. deep, in channel 90 lks. wide, course SW.; over E. slope.

50.20 End of rugged spur, slopes SE.

56.00 Change to rocky SE. slope; asc. 650 ft.

67.60 Short spur, slopes E.; desc. 122 ft. over N. slope.

71.00 (9.00 chs. S.0°10'E. of true point) Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for witness cor. to cor. of secs. 27, 28, 33 and 34, with brass cap mkd.

T14NR9E	
W	C
S28	S27
S33	S34
1934	

from which

A Douglas fir, 4 ins. diam., bears N.75°E., 3 lks. dist., mkd. WC T14N R9E S34 BT.

A Douglas fir, 15 ins. diam., bears S.43 1/4°E., 13 lks. dist., mkd. WC T14N R9E S34 BT.

An oak, 7 ins. diam., bears S.41 1/2°W., 54 lks. dist., mkd. WC T14N R9E S33 BT.

An oak, 5 ins. diam., bears N.86°W., 39 lks. dist., mkd. WC T14N R9E S34 BT.

71.10 Rim of Willow Creek canyon, bears NW. and SE.; desc. 428 ft. over cliffs and general NE. slope.

80.00 True point for cor. of secs. 27, 28, 33 and 34 falls on sloping face of cliff, an unsuitable place for monument.

Land: rolling and rough mountainous.

Soil: adobe, 2nd rate and rocky, 4th rate.

Timber: pine, fir, oak.

Undergrowth: 2nd growth pine, scrub oak, manzanita, locust.

SUBDIVISIONS OF T. 14 N., R. 9 E.

Chains	From true point for cor. of secs. 27, 28, 33 and 34 East, on random line, bet. secs. 27 and 34.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.00	A point 12 lks. N. of the cor. of secs. 26, 27, 34 and 35.
	Thence
	N. $89^{\circ}55'W.$ , on true line, bet. secs. 27 and 34.
	Over rolling N. slope; through medium growth of pine and oak timber and scattering undergrowth.
4.50	Change to NE. slope; asc. 21 ft.
13.50	Spur, slopes N.; desc. 119 ft. over W. slope.
22.10	Ravine, course NW.; asc. 93 ft. over NE. slope.
32.60	Spur, slopes NW.; desc. 89 ft. over SW. slope.
39.80	Head of ravine, course NW.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4}$ S27 $\frac{1}{4}$ S34 1934
	from which
	A white oak, 10 ins. diam., bears N. $11\frac{1}{2}^{\circ}E.$ , 99 lks. dist., mkd. $\frac{1}{4}$ S27 BT.
	A yellow pine, 24 ins. diam., bears S. $12\frac{1}{2}^{\circ}W.$ , 73 lks. dist., mkd. $\frac{1}{4}$ S34 BT.
	Asc. 20 ft. over NE. slope.
42.70	Change to N. slope; desc. 40 ft.
50.40	Change to NE. slope; asc. 30 ft.
55.00	Short spur, slopes NW.; desc. 665 ft. over rugged W. slope.
77.50	Willow Creek, stream 25 lks. wide, 6 ins. deep, course SE.; Asc. 40 ft. over E. slope.
80.00	True point for cor. of secs. 27, 28, 33 and 34 Land: rolling and rough mountainous. Soil: adobe, rocky; 3rd rate. Timber: pine, oak, spruce, fir. Undergrowth: 2nd growth pine, scrub oak, manzanita.
	----- From true point for cor. of secs. 27, 28, 33 and 34 N. $0^{\circ}10'W.$ , bet. secs. 27 and 28. Desc. 43 ft. over NE. slope; through pine, oak and spruce timber and moderate undergrowth:
4.50	Willow Creek, stream 30 lks. wide, 4 ins. deep in channel, 80 lks. wide, course S. $30^{\circ}E.$ ; asc. 75 ft. over SW. slope.
7.50	Short spur, slopes N. $60^{\circ}W.$ ; desc. 60 ft. over N. slope.
12.50	Same creek, course SW.; asc. 690 ft. over rugged S. slope.
23.50	Rim of canyon, bears NE. and SW.; asc. 15 ft.

SUBDIVISIONS OF T.14 N., R.9 E.

BOOK 4081

Chains

26.50 Spur, slopes SW.; desc. 30 ft. along W. slope.

30.20 Ravine, course SW.; asc. 66 ft. over S. slope.

37.50 Spur, slopes SW.; over W. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brasscap mkd.

$\frac{1}{4}$   
S28 | S27  
1934

from which

A pine, 9 ins. diam., bears N.52 $\frac{1}{2}$ °E., 13 lks. dist., mkd.  $\frac{1}{4}$  S27 BT.

A pine, 6 ins. diam., bears S.87 $\frac{1}{2}$ °W., 6 lks. dist., mkd.  $\frac{1}{4}$  S28 BT.

Asc. 49 ft. along W. slope.

61.00 Low ridge, bears N.15°W. and S.15°E.; over E. slope.

70.00 Same ridge, bears NE. and SW.; over W. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, supported in a mound of stone, for cor. of secs. 21, 22, 27 and 28, with brass cap mkd.

T14NR9E  
S21 | S22  
S28 | S27  
1934

from which

A pine, 7 ins. diam., bears N.43 $\frac{1}{2}$ °E., 79 lks. dist., mkd. T14N R9E S22 BT.

A pine, 6 ins. diam., bears S.15°E., 38 lks. dist., mkd. T14N R9E S27 BT.

A pine, 5 ins. diam., bears S.30 $\frac{1}{2}$ °W., 49 lks. dist., mkd. T14N R9E S28 BT.

A pine, 7 ins. diam., bears N.33°W., 41 lks. dist., mkd. T14N R9E S21 BT.

Land: rolling and mountainous, cliffs.

Soil: adobe, rocky, 3rd rate.

Timber: pine, oak, spruce.

Undergrowth: 2nd growth pine, scrub oak, manzanita.

S.89°55'E., on random line, bet. secs. 22 and 27.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.00 A point 11 lks. N. of the cor. of secs. 22, 23, 26 and 27.

Thence

N.89°50'W., on true line, bet. secs. 22 and 27.

Desc. 15 ft. over SW. slope; through medium pine, oak and spruce timber, and patches of undergrowth.

## SUBDIVISIONS OF T.14 N., R.9 E.


Chains	
3.50	Drain, course NW.; asc. 36 ft. along N. slope.
13.70	Wire fence, bears SE. and NW.
23.20	Flat spur, slopes N.25°W.; desc. 84 ft. over gradual W. slope.
29.20	Short ravine, course SW.; desc. 20 ft. along S. slope.
33.00	Change to W. slope; desc. 246 ft.
38.81	(1.19 chs. <sup>3.89°36'.</sup> of true point) Set an iron post, 3 ft. long, $\frac{1}{4}$ in. diam., 27 ins. in the ground, for witness cor. to $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{WC \frac{1}{4} S22}{S27}$
	1934
	from which
	A cedar, 11 ins. diam., bears N.53°E., 54 lks. dist., mkd. WC $\frac{1}{4}$ S22 BT.
	An oak, 4 ins. diam., bears S.49°E., 17 lks. dist., mkd. WC $\frac{1}{4}$ S27 BT.
	Desc. 320 ft. over precipitous W. slope.
40.00	True point for $\frac{1}{4}$ sec. cor. falls on broken cliffs, a point difficult of access.
46.40	Willow Creek, 25 lks. wide, 2 ins. deep, in channel 100 lks. wide, course irregularly S.; asc. 556 ft. over NE. slope.
59.40	Change to rolling E. slope; asc. 56 ft.
69.00	Short spur, slopes N.; desc. 17 ft. along N. slope.
72.20	Head of ravine, course N.; asc. slightly.
75.00	Flat spur, slopes N.; desc. 18 ft. over W. slope.
80.00	The cor. of secs. 21, 22, 27 and 28.
	Land: rolling and mountainous. Soil: limestone, adobe, 3rd rate. Timber: pine, juniper, oak, fir. Undergrowth: 2nd growth pine, locust, manzanita, mahogany.
	-----
	N.0°10'W., bet. secs. 21 and 22.
	Asc. slightly along W. slope; through medium growth of pine, juniper and oak timber and scattering undergrowth.
6.40	Spur, slopes N.65°W.; desc. 43 ft. over N. slope.
9.90	Canyon rim, bears E. and W.; desc. 400 ft. over N. slope.
14.00	Willow Creek, 15 lks. wide, 2 ins. deep, in channel 100 lks. wide, course N.80°E.; asc. 481 ft. over rugged SE. slope.
33.40	Canyon rim, bears E. and W.; asc. 10 ft. over S. slope.
35.00	Over top of flat spur, slopes W.



Chains

40.00

Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.



from which

A pine, 20 ins. diam., bears N.88 $\frac{1}{2}$ °E., 66. lks. dist., mkd.  $\frac{1}{4}$  S22 BT.

A pine, 12 ins. diam., bears S.63°W., 30 lks. dist., mkd.  $\frac{1}{4}$  S21 BT.


50.70 Leave top of spur, bears NE. and SW.; desc. 99 ft. over NW. slope.

54.50 Canyon rim, bears NE. and SW.; desc. 250 ft. over rugged NW. slope.

61.10 Willow Creek, water in pools in channel, 75 lks. wide, course SW.; asc. 220 ft. over SE. slope.

67.20 Canyon rim, bears NE. and SW.; asc. 150 ft. over SE. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, supported in a mound of stone, for cor. of secs. 15,16,21 and 22, with brass cap mkd.



from which

A pine, 15 ins. diam.; bears N.52 $\frac{1}{2}$ °E.; 106 lks. dist., mkd. T14N R9E S15 BT.

A pine, 6 ins. diam., bears S.43°E., 47 lks. dist., mkd. T14N R9E S22 BT.

A pine, 6 ins. diam., bears S.56°W., 53 lks. dist., mkd. T14N R9E S21 BT.

A pine, 6 ins. diam., bears N.41 $\frac{1}{2}$ °W., 22 lks. dist., mkd. T14N R9E S16 BT.

Land: flat to rough mountainous.  
Soil: rocky adobe, 3rd rate.  
Timber: pine, juniper, oak.  
Undergrowth: 2nd growth pine, manzanita, scrub oak.

S.89°50'E., on random line, bet. secs. 15 and 22.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.00 A point 2 lks. N. of the cor. of secs. 14,15,22 and 23.

Thence

N.89°49'W., on true line, bet. secs. 15 and 22.

Asc. 42 ft. along N. slope; through medium growth of pine, oak and juniper timber and patches of undergrowth.

## SUBDIVISIONS OF T.14 N., R.9 E.

## Chains

- 6.30 Slope changes; desc. 44 ft. along NW. slope.
- 13.90 Change to W. slope; desc. 144 ft.
- 19.10 Willow Creek, dry wash, 50 lks. wide, course SW.; asc. 88 ft. over SE. slope.
- 28.40 Short spur, slopes SE.; desc. 125 ft. over W. slope.
- 33.90 Willow Creek, dry wash, 75 lks. wide, course NW.; asc. 124 ft. over NE. slope.
- 38.30 Old fence line, bears NW. and SE.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.
- $\frac{1}{4}$  S15  
 $\frac{1}{4}$  S22  
 1934
- from which
- A pine, 14 ins. diam., bears N.10 $\frac{1}{2}$ °E., 51 lks. dist., mkd.  $\frac{1}{4}$  S15 BT.
- A pine, 13 ins. diam., bears S.37 $\frac{1}{2}$ °E., 53 lks. dist., mkd.  $\frac{1}{4}$  S22 BT.
- Asc. 96 ft. over NE. slope.
- 49.00 Spur, slopes N.; desc. 120 ft. over W. slope.
- 55.50 Ravine, course N.; asc. 85 ft. over E. slope.
- 58.70 Sharp ridge, bears N. and S.; desc. 170 ft. over W. slope.
- 63.60 Willow Creek, dry channel, 60 lks. wide, course SW.; asc. 320 ft. over SE. slope, to cor.
- 71.00 Canyon rim, bears NE. and SW.
- 80.00 The cor. of secs. 15, 16, 21 and 22.

Land: mountainous.  
 Soil: rocky adobe, 3rd rate.  
 Timber: pine, oak, juniper.  
 Undergrowth: 2nd growth pine, scrub oak, manzanita.

N.0°10'W., bet. secs. 15 and 16.

Over gentle E. slope; through medium growth of pine, oak and juniper timber and patches of undergrowth.

- 33.55 Fence, bears N.65°W. and S.65°E.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$   
 S16 | S15  
 1934

from which

A pine, 5 ins. diam., bears S.70°E., 62 lks. dist., mkd.  $\frac{1}{4}$  S15 BT.

SUBDIVISIONS OF T.14 N., R.9 E.

BOOK 4031

Chains

A pine, 22 ins. diam., bears S.88°W., 5 lks. dist., mkd. 1/4 S16 BT.

40.22 Telephone line, bears E. and W.

55.00 Change to gentle W. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 9, 10, 15 and 16, with brass cap mkd.

T14NR9E

S 9 S10

S16 S15

1934

from which

A pine, 22 ins. diam., bears N.74 1/2°E., 130 lks. dist., mkd. T14N R9E S10 BT.

A pine, 15 ins. diam., bears S.43 1/2°E., 74 1/2 lks. dist., mkd. T14N R9E S15 BT.

A pine, 22 ins. diam., bears S.11 1/2°W., 37 lks. dist., mkd. T14N R9E S16 BT.

A pine, 14 ins. diam., bears N.44°W., 167 lks. dist., mkd. T14N R9E S9 BT.

Land: flat and gently rolling.

Soil: adobe, partly rocky, 2nd and 3rd rates.

Timber: yellow pine, juniper, oak.

Undergrowth: 2nd growth pine. Fair grass.

S.89°49'E., on random line, bet. secs. 10 and 15.

40.00 Set temp. 1/4 sec. cor.

79.96 A point 5 lks. S. of the cor. of secs. 10, 11, 14 and 15.

Thence

N.89°51'W., on true line, bet. secs. 10 and 15.

Desc. 78 ft. over gentle SW. slope; through scattering pine and juniper timber and patches of undergrowth.

13.00 Change to S. slope; asc. 85 ft.

22.70 Change to W. slope; desc. 97 ft.

32.00 Wash, 15 lks. wide, course S.

33.60 Wash, 15 lks. wide, course SE.; asc. 85 ft. over NE. slope.

39.98 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.

S10

1/4 S15

1934

from which

A pine, 18 ins. diam., bears S.23 1/2°E., 112 lks. dist., mkd. 1/4 S15 BT.

SUBDIVISIONS OF T.14 N., R.9 E.

Chains

A pine, 6 ins. diam., bears N.31°W., 55 lks. dist., mkd. 1/4 S10 BT.

Asc. 6 ft. over gentle NE. slope.

45.00 Change to very gentle W. slope; desc. 20 ft.

79.96 The cor. of secs. 9, 10, 15 and 16.


Land: flat and rolling.  
Soil: adobe, 2nd rate.  
Timber: pine, juniper.  
Undergrowth: 2nd growth pine, sage. Fair grass.

N.0°10'W., bet. secs. 9 and 10.

Desc. 12 ft. over gentle NW. slope; through open pine timber.

8.50 Swale, 50 lks. wide, drains NE.; asc. 39 ft. over gentle SSE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, and in a mound of stone to top, for 1/4 sec. cor., with brass cap mkd.



from which


A pine, 14 ins. diam., bears N.29 1/2°E., 94 lks. dist., mkd. 1/4 S10 BT.

A pine, 16 ins. diam., bears N.35°38'W., 110 lks. dist., mkd. 1/4 S9 BT.

Asc. slightly over gentle SSE. slope.

73.00 Change to gentle NW. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground, and in a mound of stone to top, for cor. of secs. 3, 4, 9 and 10, with brass cap mkd.



from which

A pine, 14 ins. diam., bears N.15 1/2°E., 51 lks. dist., mkd. T14N R9E S3 BT.

A double pine, 10 ins. diam., bears S.42 1/2°E., 144 lks. dist., mkd. T14N R9E S10 BT.

A pine, 20 ins. diam., bears S.23°W., 44 lks. dist., mkd. T14N R9E S9 BT.

A pine, 22 ins. diam., bears N.48 1/2°W., 40 lks. dist., mkd. T14N R9E S4 BT.

Land: gently rolling.  
Soil: adobe, rocky, 3rd rate.  
Timber: pine, juniper. Undergrowth: 2nd growth pine, sage.

SUBDIVISIONS OF T.14 N., R.9 E.

Chains

S.89°51'E., on random line, bet. secs. 3 and 10.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.12 A point 12 lks. S. of the cor. of secs. 2,3,10 and 11.

Thence

N.89°56'W., on true line, bet. secs. 3 and 10.

Desc. 25 ft. over gentle W. slope; through scattering large pine and undergrowth.

25.00 S. corner of an open field bears about  $1\frac{1}{2}$  chs. N.

28.00 Center of low, partly open area, bears N. and S.; asc. 12 ft. over gentle E. slope.

40.06 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$  S3  
S10  
1934

from which

A pine, 10 ins. diam., bears S.51°38'W., 72 lks. dist., mkd.  $\frac{1}{4}$  S10 BT.

A pine, 9 ins. diam., bears N.32°W., 126 lks. dist., mkd.  $\frac{1}{4}$  S3 BT.

Desc. slightly over gentle SW. slope.

50.00 Change to S. slope; asc. 21 ft.

73.50 Low rise, bears NE. and SW.; over gentle NW. slope.

80.12 The cor. of secs. 3,4,9 and 10.

Land: gently rolling.  
Soil: rocky adobe, 3rd rate.  
Timber: yellow pine.  
Undergrowth: 2nd growth of same.

N.0°10'W., bet. secs. 3 and 4.

Over gentle W. slope; through medium growth of pine and juniper timber and scattering undergrowth.

28.10 Road, bears S.35°W. to Walker's ranch and N.5°E. to highway.

33.15 Fence, bears E. and W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$   
S4 | S3  
1934

from which

A pine, 19 ins. diam., bears S.63°E., 72 lks. dist., mkd.  $\frac{1}{4}$  S3 BT.

## SUBDIVISIONS OF T.14 N., R.9 E.

Chains

A pine, 17 ins. diam., bears N.  $53\frac{1}{4}^{\circ}$ W., 49 lks. dist.,  
mkd.  $\frac{1}{4}$  S4 BT.

41.65 Fence, bears E., 2 chs. and W.

51.00 Short point, 6 ft. high, projects E.

60.00 Change to SE. slope; asc. 111 ft.

81.91 Intersect the S. bdy. of T.15 N., R.9 E. At intersection

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the  
ground, supported in a mound of stone, for closing cor.  
of secs. 3 and 4, with brass cap mkd.

T15NR9E

S34

S4 | S3

C.C.

T14N

1934

from which

A pine, 6 ins. diam., bears S.  $13^{\circ}$ E., 72 lks. dist.,  
mkd. T14N R9E S3 CC BT.

A pine, 20 ins. diam., bears S.  $52\frac{1}{2}^{\circ}$ W., 26 lks. dist.,  
mkd. T14N R9E S4 CC BT.

From point of intersection the cor. of secs. 33 and 34,  
only, bears N.  $89^{\circ}53'$ W., 3.77 chs. dist.; the  $\frac{1}{2}$  sec. cor.  
of sec. 34, only, bears S.  $89^{\circ}53'$ E., 36.32 chs. dist.,  
both hereinbefore described.

Land: gently rolling.

Soil: adobe, 2nd and 3rd rates.

Timber: pine, juniper.

Undergrowth: 2nd growth pine, sage.

From the cor. of secs. 32 and 33, only, on the S. bdy. of  
the Tp., established under this Group, described in Book  
"B",

N.  $0^{\circ}10'$ W., bet. secs. 32 and 33.

Desc. 47 ft. along E. slope; through medium growth of pine,  
fir and oak timber and patches of undergrowth.

4.30 Change to SE. slope; asc. 24 ft.

19.10 Short spur, slopes NE.; desc. 255 ft. over NW. slope.

33.07 (6.93 chs. S.  $0^{\circ}10'$ E. of true point) Set an iron post, 3  
ft. long, 1 in. diam., 10 ins. in the ground and in a  
mound of stone to top, for witness cor. to  $\frac{1}{2}$  sec. cor.,  
with brass cap mkd.

 $\frac{1}{4}$   
W | C  
S32 | S33

1934


from which

A Douglas fir, 15 ins. diam., bears N.  $28^{\circ}$ W., 23 lks.  
dist., mkd. WC  $\frac{1}{4}$  S32 BT.

An oak, 5 ins. diam., bears S.  $70\frac{1}{2}^{\circ}$ E., 58 lks. dist.,  
mkd. WC  $\frac{1}{2}$  S33 BT.

SUBDIVISIONS OF T.14 N., R.9 E.

Chains  
 33.30 Top of cliffs, face N.; desc. 400 ft.  
 40.00 True point for  $\frac{1}{2}$  sec. cor. falls in Clear Creek, stream  
 25 lks. wide, 4 ins. deep, in channel, 75 lks. wide,  
 course W.; desc.  
 Asc. 328 ft. over rugged S. slope.  
 49.70 Short spur, slopes SE.; asc. 68 ft. along E. slope.  
 55.70 Top of ascent; desc. 12 ft. along E. slope.  
 58.40 Head of drain, course SE.; asc. 40 ft. along E. slope.  
 65.20 Change to SE. slope; asc. 226 ft.  
 77.13 Line tree, an oak, 18 ins. diam.  
 77.50 Top of ascent; over gentle S. slope.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the  
 ground, and in a mound of stone to top, for cor. of secs.  
 28, 29, 32 and 33, with brass cap mkd.



from which

- A yellow pine, 8 ins. diam., bears N.78 $\frac{1}{2}$ °E., 46 lks. dist., mkd. T14N R9E S28 BT.
  - A yellow pine, 6 ins. diam., bears S.69 $\frac{3}{4}$ °E., 54 lks. dist., mkd. T14N R9E S33 BT.
  - A juniper, 16 ins. diam., bears S.70 $\frac{1}{2}$ °W., 49 lks. dist., mkd. T14N R9E S32 BT.
  - A juniper, 30 ins. diam., bears N.61°W., 134 lks. dist., mkd. T14N R9E S29 BT.
- Land: rolling and rough mountainous.  
 Soils: adobe, rocky, 3rd. rate..  
 Timber: pine, fir, spruce, juniper, oak.  
 Undergrowth: 2nd growth pine, fir, manzanita, oak, locust.

East, on random line, bet. secs. 28 and 33.

40.00 Set temp.  $\frac{1}{2}$  sec. cor.  
 80.10 A point 7 lks. N. of the true point for cor. of secs. 27,  
 28, 33 and 34.  
 Thence  
 N.89°57'W., on true line, bet. secs. 28 and 33.  
 Asc. 570 ft. over cliffs on E. slope; through medium pine  
 fir and oak timber and patches of undergrowth.  
 10.30 Rim of Willow Creek canyon, bears NW. and SE.; asc. 56 ft.  
 along N. slope.  
 23.10 Ridge, bears N. and SW.; continue over N. slope.  
 30.50 Head of ravine, course NW.

SUBDIVISIONS OF T.14 N., R.9 E.

Chains  
40.05 Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground, and in a mound of stone to top, for  $\frac{1}{2}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$  S28  
 $\frac{1}{4}$  S33  
1934

from which

A pine, 6 ins. diam., bears N.40°E., 35 lks. dist., mkd.  $\frac{1}{4}$  S28 BT.

A pine, 6 ins. diam., bears S.0 $\frac{1}{4}$ °W., 26 lks. dist., mkd.  $\frac{1}{4}$  S33 BT.

Desc. 90 ft. along N. side of spur, slopes W.

54.30 Ravine, course S.55°W.; asc. 35 ft. over SE. slope.

57.20 Short spur, slopes S.; desc. 41 ft. over SW. slope.

68.10 Ravine, course SE.; asc. 197 ft. over SE. slope.

80.10 The cor. of secs. 28, 29, 32 and 33.

Land: rolling and mountainous.  
Soil: adobe, rocky, 3rd rate.  
Timber: pine, oak, fir, juniper.  
Undergrowth: 2nd growth pine, manzanita, scrub oak.

-----

N.0°10'W., bet. secs. 28 and 29.

Over gentle S. slope; through scattering juniper and pine timber and scattering undergrowth.

3.00 Low rise, bears E. and W.; over gentle N. slope.

12.00 Head of ravine, course SE.; over E. slope.

14.50 Asc. 18 ft. over S. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground, and in a mound of stone to top, for  $\frac{1}{2}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$   
S29 | S28  
1934

from which

A yellow pine, 13 ins. diam., bears N.75 $\frac{1}{2}$ °E., 54 lks. dist., mkd.  $\frac{1}{4}$  S28 BT.

A juniper, 15 ins. diam., bears N.34°W., 44 lks. dist., mkd.  $\frac{1}{4}$  S29 BT.

Asc. 5 ft. over gentle S. slope.

43.00 Low rise, bears E. and W.; over gentle N. slope.

50.00 Change to S. slope; asc. 78 ft.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 20, 21, 28 and 29, with brass cap mkd.



SUBDIVISIONS OF T.14 N., R.9 E.

Chains

T14NR9E  
S20 S21  
S29 S28  
1934

from which

An oak limb, 6 ins. diam., bears N.73°E., 113 lks. dist.,  
mkd. T14N R9E S21 BT.

A yellow pine, 16 ins. diam., bears S.14°E., 56 lks.  
dist., mkd. T14N R9E S28 BT.

An oak, 9 ins. diam., bears S.29½°W., 110 lks. dist.,  
mkd. T14N R9E S29 BT.

An oak, 6 ins. diam., bears N.50°W., 123 lks. dist.,  
mkd. T14N R9E S20 BT.

Land: gently rolling.  
Soil: adobe, rocky, 3rd rate.  
Timber: juniper, oak, pine.  
Undergrowth: 2nd growth pine. Fair grass.

S.89°57'E., on random line, bet. secs. 21 and 28.

40.00 Set temp. ¼ sec. cor.

80.04 A point 2 lks. S. of the cor. of secs. 21,22,27 and 28.

Thence

N.89°58'W., on true line, bet. secs. 21 and 28.

Desc. 34 ft. over W. slope; through scattering oak, pine  
and juniper timber and medium undergrowth.

4.80 Draw, course SW.; asc. 32 ft. along S. slope.

9.70 Enter open area, bears N. and S.

13.20 Leave same.

21.00 Spur, slopes S.25°E.; desc. 54 ft. over SW. slope.

33.60 Drain, course SE.; asc. 27 ft. over E. slope.

40.02 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the  
ground, and in a mound of stone to top, for ¼ sec. cor.,  
with brass cap mkd.

S21  
S28  
1934

from which

An oak, 15 ins. diam., bears N.10½°E., 23 lks. dist.,  
mkd. ¼ S21 BT.

A pine, 11 ins. diam., bears S.22°W., 13 lks. dist.,  
mkd. ¼ S28 BT.

Asc. 266 ft. over E. slope.

55.50 Change to S. slope; desc. 73 ft.

80.04 The cor. of secs. 20,21,28 and 29.

## Chains

Land: rolling.  
Soil: adobe, rocky, 3rd rate.  
Timber: pine, juniper, oak.  
Undergrowth: 2nd growth pine. Fair grass.

-----  
N.0°10'W., bet. secs. 20 and 21.

Asc. 38 ft. over gentle S. slope; through scattering pine, oak and juniper timber and scattering undergrowth.

10.50 Ridge, bears E. and W.; desc. 52 ft. over N. slope.

15.80 Trail, bears N.25°E. and S.25°W.

21.80 Change to W. slope; desc. 50 ft.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor.; with brass cap mkd.

↑  
S20 | S21  
1934

from which

A pine, 6 ins. diam., bears S.62½°E., 17 lks. dist., mkd.  $\frac{1}{4}$  S21 BT.

A pine, 7 ins. diam., bears N.58°W., 13 lks. dist., mkd.  $\frac{1}{4}$  S20 BT.

Desc. 15 ft. along gentle W. slope.

49.30 Trail, bears NE. and SW.

54.80 Wire fence, 6-strand, bears S.65°E. and N.65°W.

59.80 Change to NW. slope; desc. 12 ft.

71.20 Intersect the 3-4 line of H.E.S. No. 389 at a point 7.01 chs. N.35°41'E. of its cor. No. 4, which is a stone, 12 x 10 x 6 ins. above ground, firmly set, and mkd. and witnessed as described in the official record. Cor. No. 3 of same bears N.35°41'E., 27.38 chs. dist. from point of intersection, a lava stone, 12 x 6 x 6 ins. above ground, firmly set and mkd. and witnessed as described in the official record.

Over patented land.

74.51 Fence, bears NE. and SW.

75.30 Fence, bears E. and W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 16, 17, 20 and 21, with brass cap mkd.

T14NR9E

S17 | S16

S20 | S21

1934

from which

A pine, 6 ins. diam., bears N.83½°E., 327 lks. dist., mkd. T14N R9E S16 BT.

## SUBDIVISIONS OF T.14 N., R.9 E.

BOOK 4031

Chains

A pine, 5 ins. diam., bears S.52 $\frac{1}{2}$ °E., 256 lks. dist.,  
mkd. T14N R9E S21 BT.

No other suitable trees available.

SE. cor. of Walker's old house bears N.49°W.

SE. cor. of Walker's new house bears N.50°05'W.

SE. cor. of Walker's barn bears N.41°19'W.

Land: flat to rolling.

Soil: adobe, 2nd and 3rd rate.

Timber: pine, oak and juniper.

Undergrowth: 2nd growth pine, sage.

S.89°58'E., on random line, bet. secs. 16 and 21.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.00 A point 9 lks. S. of the cor. of secs. 15,16,21 and 22.

Thence

S.89°58'W., on true line, bet. secs. 16 and 21.

Over flat; through open large yellow pine timber.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in the  
ground, supported in a mound of stone, for  $\frac{1}{4}$  sec. cor.,  
with brass cap mkd.

$\frac{316}{\frac{1}{4}S21}$

1934

from which

A pine, 26 ins. diam., bears S.44°E., 89 lks. dist.,  
mkd.  $\frac{1}{4}$  S21 BT.

A pine, .6 ins. diam., bears N.0°40'W., 104 lks. dist.,  
mkd.  $\frac{1}{4}$  S16 BT.

Desc. 24 ft. over gentle W. slope.

54.00 Foot of descent; over flat.

73.65 Intersect the 3-4 line of H.E.S.No.389 at a point 16.55  
chs. S.35°41'W. of its cor. No.3 and 17.84 chs. N.35°41'  
E. of its cor. No.4, both hereinbefore described.

74.75 Fence NE. and SW.

80.00 Over patented land.

80.00 The cor. of secs. 16,17,20 and 21.

Land: flat and gently rolling.

Soil: adobe, 2nd rate.

Timber: yellow pine, scattering oak and juniper.

Undergrowth: sage.

## SUBDIVISIONS OF T.14 N., R.9 E.

Chains

N.0°10'W., bet. secs. 16 and 17.

Over flat; through scattering pine timber and undergrowth.

Over patented land.

16.00 Fence, bears E. and W.

16.55 Telephone line, bears N.70°E. and S.70°W.

36.70 Fence, bears SW. and NE., soon E.

36.76 Intersect 1-8 line of H.E.S. No.389 at a point 27 lks.  
S.54°44'W. of its cor. No.1, which is a stone, 16 x 9  
x 6 ins. above ground, firmly set and mkd. and witnessed  
as described in the official record.  
Cor. No.8, a lava stone, 12 x 8 x 8 ins. above ground,  
firmly set and mkd. and witnessed as described in the  
official record, bears S.54°44'W., 21.92 chs. dist.  
from point of intersection.

Leave patented land.

37.23 Road, bears E. and SW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the  
ground, supported in a mound of stone, for  $\frac{1}{4}$  sec. cor.,  
with brass cap mkd.

S17 S16

1934

from which

A pine, 6 ins. diam., bears S.37°E., 47 lks. dist., mkd.  
 $\frac{1}{2}$  S16 BT.

A pine, 7 ins. diam., bears N.38 $\frac{1}{2}$ °W., 49 lks. dist.,  
mkd.  $\frac{1}{2}$  S17 BT.

Over gradual S. slope.

55.00 Low rise, bears E. and W.; desc. 10 ft.

64.00 Swale, drains SE.; asc. 24 ft. over SW. slope.

69.50 Fence, bears N.70°W. and S.70°E.

80.00 Point for cor. of secs. 8,9,16 and 17 is occupied by a  
yellow pine, 12 ins. diam., which I mark: S9 TC on NE.,  
S16 TC on SE., S17 TC on SW. and T14N R9E S8 TC on NW.  
faces, from which

A pine, 7 ins. diam., bears N.31°E., 74 lks. dist.,  
mkd. T14N R9E S9 BT.

A pine, 7 ins. diam., bears S.27 $\frac{1}{2}$ °E., 117 lks. dist.,  
mkd. T14N R9E S16 BT.

A pine, 8 ins. diam., bears S.59°W., 109 lks. dist.,  
mkd. T14N R9E S17 BT.

A pine, 6 ins. diam., bears N.44 $\frac{1}{2}$ °W., 40-lks. dist.,  
mkd. T14N R9E S8 BT.

Land: flat and gently rolling.

Soil: adobe, 2nd rate.

Timber: pine. Undergrowth: same and sage.

SUBDIVISIONS OF T.14 N., R.9 E.

Chains

N.89°58'E., on random line, bet. secs. 9 and 19.

40.00 Set temp.  $\frac{1}{2}$  sec. cor.

80.00 A point 2 lks. S. of the cor. of secs. 9,10,15 and 16.

Thence

S.89°57'W., on true line, bet. secs. 9 and 16.

Desc. 12 ft. over gentle W. slope; through scattering pine and oak timber and scattering undergrowth.

5.50 Enter open swale, drains NE.

9.00 Leave same.

21.00 Same swale, drains SW.

39.45 Fence, bears N.35°E. and S.35°W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, supported in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$  S9  
 $\frac{1}{4}$  S16

1934

from which

A pine, 16 ins. diam., bears S.39 $\frac{1}{2}$ °W., 89 lks. dist., mkd.  $\frac{1}{4}$  S16 BT.

A pine, 14 ins. diam., bears N.5 $\frac{1}{2}$ °W., 56 lks. dist., mkd.  $\frac{1}{4}$  S9 BT.

Over gentle N. slope.

53.40 Road, bears NE. to highway and SW. to Walker's ranch.

70.60 Top of rise, bears NW. and SE.; desc. 13 ft.

80.00 The cor. of secs. 8,9,16 and 17.

Land: flat and gently rolling.  
Soil: adobe, rocky, 2nd rate.  
Timber: yellow pine, oak.  
Undergrowth: 2nd growth pine, sage.

N.0°10'W., bet. secs. 8 and 9.

Asc. 28 ft. over gentle SW. slope; through medium growth of pine and oak timber and scattering undergrowth.

11.70 Top of rise, bears NW. and SE.; desc. 14 ft. over NE. slope.

36.70 Change to N. slope; desc. 19 ft.


39.74 Intersect the 10-11 line of H.E.S. No.388 at a point 3.96 chs. S.76°30'W. of its cor. No.10, which is a lava stone, 10 x 10 x 4 ins. above ground, mkd. and witnessed as described in the official record.  
From point of intersection Cor. No. 11 bears S.76°30'W., 11.53 chs. dist., a stone, 16 x 12 x 4 ins. above ground, mkd. and witnessed as described in the official record.

Over patented land.

SUBDIVISIONS OF T.14 N., R.9 E.

Chains

40.00 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, supported in a mound of stone, for  $\frac{1}{2}$  sec. cor., with brass cap mkd.



from which

A pine, 14 ins. diam., bears S.10 $\frac{1}{4}$ °E., 83 lks. dist., mkd.  $\frac{1}{4}$  S9 BT.

A pine, 22 ins. diam., bears S.12°W., 86 lks. dist., mkd.  $\frac{1}{4}$  S8 BT.

40.10 Fence, bears S.75°E. and N.75°W., soon S.65°W.; enter cleared field.

47.90 Fence, bears NE. and SW.; leave field.


48.30 Road, bears N.60°E. and S.60°W.; asc. 44 ft. over gentle S. slope.

49.32 Intersect 1-15 line of H.E.S. No.388 at a point 3.67 chs. S.61°36'W. of its cor. No.1, which is a stone, 14 x 10 x 4 ins. above ground, firmly set and mkd. and witnessed as described in the official record. From point of intersection the cor. No.15 bears S.61°36'W., 7.05 chs. dist., a lava boulder in place, mkd. and witnessed as described in the official record.

Leave patented land.

70.00 Low ridge, bears NW. and SE.; desc. 5 ft.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 22 ins. in the ground, supported in a mound of stone, for cor. of secs. 4,5,8 and 9, with brass cap mkd.



from which

A pine, 12 ins. diam., bears N.49 $\frac{1}{2}$ °E., 68 lks. dist., mkd. T14N R9E S4 BT.

A pine, 15 ins. diam., bears S.81 $\frac{1}{2}$ °E., 80 lks. dist., mkd. T14N R9E S9 BT.

A pine, 16 ins. diam., bears S.41 $\frac{1}{2}$ °W., 128 lks. dist., mkd. T14N R9E S8 BT.

A pine, 16 ins. diam., bears N.13 $\frac{1}{2}$ °W., 176 lks. dist., mkd. T14N R9E S5 BT.

Land: gently rolling.

Soil: adobe, 2nd and 3rd rates.

Timber: pine, oak, juniper.

Undergrowth: 2nd growth pine, sage. Fair grass.

SUBDIVISIONS OF T.14 N., R. 9 E.

BOOK 4031

Chains

- ... N.89°57'E.; on random line, bet. secs. 4 and 9.
- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
- 79.82 A point 21 lks. S. of the cor. of secs. 3,4,9 and 10.
- Thence
- S.89°48'W., on true line, bet. secs. 4 and 9.
- Over gently rolling land; through scattering large yellow pine and oak timber and scattering undergrowth.
- 29.40 Road, bears NE. and SW.
- 33.68 Cor. No. 3 of H.E.S. No. 387 bears N.9°15'W., 1.02 chs. dist.; a lava stone, 12 x 12 x 9 ins. above ground, firmly set and mkd. and witnessed as described in the official record.
- 39.91 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$ S4  
 $\frac{1}{4}$ S9

1934

from which

A pine, 15 ins. diam., bears S.23 $\frac{1}{4}$ °E., 72 lks. dist., mkd.  $\frac{1}{4}$  S9 BT.

A pine, 6 ins. diam., bears N.4 $\frac{1}{4}$ °E., 44 lks. dist., mkd.  $\frac{1}{4}$  S4 BT.

- 53.00 Over gradual W. slope; desc. 28 ft.
- 57.50 Fence, bears N.3°W. and S.3°E.
- 69.30 Low swale, from NW., drains irregularly S.; asc. 14 ft.
- 79.82 The cor. of secs. 4,5,8 and 9.

Land: flat and gently rolling.  
Soil: adobe, rocky, 2nd and 3rd rates.  
Timber: yellow pine and a few oak.  
Undergrowth: 2nd growth pine, sage.

- ... N.0°10'W., bet. secs. 4 and 5.
- Desc. 12 ft. over gentle NE. slope; through medium growth of yellow pine and oak timber and scattering undergrowth.
- 12.00 A wide swale, drains SE.; over flat.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S5 | S4

1934

from which

A pine, 6 ins. diam., bears S.74 $\frac{1}{2}$ °E., 11 lks. dist., mkd.  $\frac{1}{4}$  S4 BT.

SUBDIVISIONS OF T.14 N., R.9 E.

Chains

A pine, 4 ins. diam., bears S.70 $\frac{1}{4}$ °W., 22 lks. dist., mkd.  $\frac{1}{2}$  S5 BT.

45.00 Leave flat; asc. 52 ft. over SW. slope.

60.00 Top of ascent; over flat.

82.43 Intersect the S. bdy. of T. 15 N., R.9 E. At intersection Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground, and in a mound of stone to top, for closing cor. of secs. 4 and 5, with brass cap mkd.

T15NR9E

S33

S5 | S4

C.C.

T14N.

1934

from which

A yellow pine, 18 ins. diam., bears S.64 $\frac{1}{4}$ °E., 141 lks. dist., mkd. T14N R9E S4 CC BT.

A yellow pine, 14 ins. diam., bears S.10°W., 198 lks. dist., mkd. T14N R9E S5 CC BT.

From point of intersection the cor. of secs. 32 and 33, only, bears N.89°45'W., 3.96 chs. dist.; the  $\frac{1}{2}$  sec. cor. of sec. 33, only, bears S.89°45'W., 36.14 chs. dist., both hereinbefore described.

Land: flat and gently rolling.  
Soil: adobe, rocky, 3rd rate.  
Timber: pine, juniper, oak.  
Undergrowth: 2nd growth pine, sage.

From the cor. of secs. 31 and 32, only, on the S. bdy. of the Tp., established under this Group, described in Book "B",

N.0°11'W., bet. secs. 31 and 32.

Desc. 40 ft. along W. slope; through medium growth of pine, fir and spruce timber and patches of undergrowth.

7.70 Rim of Clear Creek canyon, bears E. and SW.; desc. 680 ft. over cliffs on N. slope.

15.70 Clear Creek, stream 20 lks. wide, 4 ins. deep, in channel 80 lks. wide, course S.70°W.; asc. 710 ft. over rugged SE. slope.

40.00 True point for  $\frac{1}{4}$  sec. cor. falls on cliffs, a point difficult of access.

42.90 Rim of Clear Creek canyon, bears S.70°W. and NE.

43.50 (3.50 chs. N.0°11'W. of true point) Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, and in a mound of stone to top, for witness cor. to  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S31 | S32

W | C

1934

from which



## SUBDIVISIONS OF T.14 N., R.9 E.

BOOK 4031

## Chains

A yellow pine, 10 ins. diam., bears N.15 $\frac{1}{2}$ °E., 33 lks. dist., mkd. WC  $\frac{1}{2}$  S32 BT.

A yellow pine, 8 ins. diam., bears S.76 $\frac{1}{2}$ °W., 52 lks. dist., mkd. WC  $\frac{2}{7}$  S31 BT.

Asc. 40 ft. over gradual S. slope.

52.30 Spur, slopes SW.; desc. 101 ft. over NW. slope.

66.50 Ravine, course SW.; asc. 90 ft. over SE. slope.

72.11 Short spur, slopes E.; desc. 37 ft. over NE. slope.

75.60 Same ravine, course SE.; asc. 113 ft. over SW. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground, and in a mound of stone to top, for cor. of secs. 29, 30, 31 and 32, with brass cap mkd.

T14NR9E

S30 | S29

S31 | S32

1934

from which

A yellow pine, 30 ins. diam., bears N.61 $\frac{1}{2}$ °E., 83 lks. dist., mkd. T14N R9E S29 BT.

A yellow pine, 10 ins. diam., bears S.9 $\frac{1}{2}$ °E., 67 lks. dist., mkd. T14N R9E S32 BT.

A white oak, 6 ins. diam., bears S.53°W., 23 lks. dist., mkd. T14N R9E S31 BT.

A white oak, 6 ins. diam., bears N.49 $\frac{1}{2}$ °W., 49 lks. dist., mkd. T14N R9E S30 BT.

Land: S.  $\frac{1}{2}$  mountainous; N.  $\frac{1}{2}$  rolling.

Soil: adobe, rocky, 3rd rate.

Timber: pine, oak, fir, spruce, juniper.

Undergrowth: 2nd growth pine, scrub oak, manzanita.

East, on random line, bet. secs. 29 and 32.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.06 A point 5 lks. N. of the cor. of secs. 28, 29, 32 and 33.

Thence

N.89°58'W., on true line, bet. secs. 29 and 32.

Over flat spur, slopes S.; through medium growth of pine, oak and juniper timber and scattering undergrowth.

15.00 Leave top of spur; desc. 301 ft. over W. slope.

31.00 Canyon, dry wash, 15 lks. wide, course S.; asc. 236 ft. over SE. slope.

39.80 Short spur, slopes S.

40.03 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

SUBDIVISIONS OF T.14 N., R.9 E.

Chains

1/4 S29  
4/4 S32  
1934

from which

A white oak, 4 ins. diam., bears S.66 $\frac{1}{2}$ °E., 26 lks. dist., mkd.  $\frac{1}{4}$  S32 BT.

A yellow pine, 7 ins. diam., bears N.44 $\frac{1}{2}$ °W., 36 lks. dist., mkd.  $\frac{1}{4}$  S29 BT.

Desc. 70 ft. over SW. slope.

42.90 Ravine, wash, 10 lks. wide, 4 ft. deep, course SE.; asc. 99 ft. over NE. slope.

55.10 Over rolling mesa<sup>S</sup> land, bears NW. and SE.

64.10 Dim road, bears N. and S.; desc. 80 ft. over SW. slope.

75.30 Ravine, wash, 8 lks. wide, 3 ft. deep, course S.; asc. 47 ft. over SE. slope.

78.00 Short spur, slopes S.; desc. 13 ft. over SW. slope.

80.06 The cor. of secs. 29,30,31 and 32.

Land: rolling.  
Soil: adobe, rocky, 3rd rate.  
Timber: pine, oak, juniper.  
Undergrowth: 2nd growth pine, scrub oak, sage.

-----  
West, on random line, bet. secs. 30 and 31.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

66.20 A point 4 lks. N. of the true point for cor. of secs. 25, 30, 31 and 36, on the W. Bdy, of the Twp. hereinbefore described.

Thence

N.89°58'E., on true line, bet. secs. 30 and 31.

Asc. 150 ft. over rugged SW. slope; through medium growth of pine, juniper and oak timber and medium undergrowth.

3.70 Rim of Clear Creek canyon, bears NW. and SE.; asc. 18 ft. over gradual SW. slope.

11.20 Short spur, slopes SE.; desc. 167 ft. over E. slope.

19.70 Ravine, course SE.; asc. 5 ft.

20.50 Short spur, slopes S.; desc. 7 ft.

21.90 Ravine, course S.15°W.; asc. 106 ft. over W. slope.

25.20 Spur, slopes SW.

26.20 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

1/4 S30  
4/4 S31  
1934

from which

SUBDIVISIONS OF T.14 N., R.9 E.

Chains

A yellow pine, 18 ins. diam., bears S:31 $\frac{1}{4}$ °W., 24 lks. dist., mkd.  $\frac{1}{4}$  S31 BT.

A yellow pine, 28 ins. diam., bears N:24 $\frac{1}{4}$ °W., 73 lks. dist., mkd.  $\frac{1}{4}$  S30 BT.

Desc. 8 ft. over SE. slope.

30.70 Wash, 5 lks. wide, 1 ft. deep, course SW.; asc. 250 ft. over SW. slope.

53.50 Spur, slopes SE.; desc. 131 ft. over NE. slope.

62.40 Ravine, wash, 6 lks. wide, 1 ft. deep, course SE.; asc. 77 ft. over SW. slope.

66.20 The cor. of secs. 29, 30, 31 and 32.


Land: rolling.  
Soil: adobe, rocky, 3rd rate.  
Timber: pine, oak, juniper.  
Undergrowth: 2nd growth pine, scrub oak, sage.

N.0°11'W., bet. secs. 29 and 30.

Asc. 43 ft. over gentle SW. slope; through scattering pine and juniper timber and scattering undergrowth.

21.50 Over flat.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 4 ins. in the ground, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.



from which


A pine, 12 ins. diam., bears S.65 $\frac{1}{2}$ °E., 150 lks. dist., mkd.  $\frac{1}{4}$  S29 BT.

A pine, 18 ins. diam., bears N.84 $\frac{1}{2}$ °W., 95 lks. dist., mkd.  $\frac{1}{4}$  S30 BT.

45.00 Change to gentle S. slope; asc. 18 ft.

60.00 Low flat spur, slopes SW.; desc. 18 ft. over gentle SW. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 16 ins. in the ground, and in a mound of stone to top, for cor. of secs. 19, 20, 29 and 30, with brass cap mkd.



from which

A pine, 30 ins. diam., bears N.38 $\frac{1}{2}$ °E., 56 lks. dist., mkd. T14N R9E S20 BT.

A yellow pine, 5 ins. diam., bears S.13°E., 15 lks. dist., mkd. T14N R9E S29 BT.

A white oak, 6 ins. diam., bears S.9 $\frac{1}{2}$ °W., 100 lks.

## SUBDIVISIONS OF T.14 N., R.9 E.

## Chains

dist., mkd. T14N R9E S30 BT.

A white oak, 8 ins. diam., bears N.62 $\frac{1}{2}$ °W., 112 lks.  
dist., mkd. T14N R9E S19 BT.

Land: flat and gently rolling.  
Soil: adobe, rocky, 2nd and 3rd rates.  
Timber: pine, juniper, oak.  
Undergrowth: sage.

S.89°58'E., on random line, bet. secs. 20 and 29.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.20 A point 5 lks. S. of the cor. of secs. 20, 21, 28 and 29.

Thence

West, on true line, bet. secs. 20 and 29.

Over flat; through medium growth of pine, oak and juniper  
timber and patches of undergrowth.

15.00 Change to W. slope; desc. 75 ft.

23.60 A secondary road, bears N. and S.

28.50 Draw, course N.; asc. 156 ft. over E. slope.

40.10 Set an iron post, 3 ft. long, 1 in. diam., on exposed bed-  
rock, mounded in stone to top, for  $\frac{1}{4}$  sec. cor., with  
brass cap mkd.

$\frac{1}{4}$  S20  
 $\frac{1}{4}$  S29

1934

from which

A pine, 6 ins. diam., bears S.26°E., 37 lks. dist.,  
mkd.  $\frac{1}{4}$  S29 BT.

A pine, 14 ins. diam., bears N.32°W., 89 lks. dist.,  
mkd.  $\frac{1}{4}$  S20 BT.

40.25 Spur, slopes SE.; desc. 25 ft. along S. slope.

55.20 Short spur, slopes S.; desc. 86 ft. over SW. slope.

80.20 The cor. of secs. 19, 20, 29 and 30.

Land: flat and rolling.  
Soil: adobe, rocky, 3rd rate.  
Timber: pine, oak, juniper.  
Undergrowth: 2nd growth pine, sage.

S.89°58'W., on random line, bet. secs. 19 and 30.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

.65.88 A point 2 lks. N. of the cor. of secs. 19, 24, 25 and 30, on  
the W. bdy. of the Tp., hereinbefore described.

Thence

N.89°57'E., on true line, bet. secs. 19 and 30.

SUBDIVISIONS OF T.14 N., R.9 E.

BOOK 4031


Chains

Over gentle S. slope; through scattering pine and juniper timber and scattering undergrowth.

0.15 Dim road brs. N. 30'E. and S. 30'W.

3.50 Change to SW. slope; asc. 101 ft.

25.88 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



1934

from which

A yellow pine, 1 1/4 ins. diam., bears S. 26 1/2° E., 100 lks. dist., mkd. 1/4 S30 BT.

A yellow pine, 1 1/4 ins. diam., bears N. 36° W., 170 lks. dist., mkd. 1/4 S19 BT.

Over gentle SW. slope.

51.00 Change to SE. slope; desc. 7 ft.

56.00 Change to SW. slope; asc. 34 ft.

65.88 The cor. of secs. 19, 20, 29 and 30.

Land: gently rolling.  
Soil: adobe, rocky, 3rd rate.  
Timber: pine, juniper.  
Undergrowth: sage.

N. 0° 11' W., bet. secs. 19 and 20.

Asc. 46 ft. over gentle SW. slope; through medium growth of pine and juniper timber and scattering undergrowth.

22.10 Road, bears NE. and SW.

26.00 Change to gentle E. slope; asc. 12 ft.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground; and in a mound of stone to top, for 1/4 sec. cor., with brass cap mkd.



1934

from which

A white oak, 6 ins. diam., bears S. 71 1/2° E., 32 lks. dist., mkd. 1/4 S20 BT.

A white oak, 8 ins. diam., bears S. 39 1/2° W., 15 lks. dist., mkd. 1/4 S19 BT.

Asc. 57 ft. over SW. slope.

49.20 Spur, slopes NW.; desc. 41 ft. over NE. slope.

66.00 Change to SE. slope; asc. 46 ft.

78.50 Spur, slopes NW.; desc. 10 ft.

## SUBDIVISIONS OF T.14 N., R.9 E.

- Chains  
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground, and in a mound of stone to top, for cor. of secs. 17, 18, 19 and 20, with brass cap mkd.
- |      |     |
|------|-----|
| T14  | N9E |
| S18  | S17 |
| S19  | S20 |
| 1934 |     |
- from which
- A yellow pine, 5 ins. diam., bears N.24 $\frac{1}{2}$ °E., 46 lks. dist., mkd. T14N R9E S17 BT.
- A yellow pine, 6 ins. diam., bears S.70 $\frac{1}{2}$ °E., 33 lks. dist., mkd. T14N R9E S20 BT.
- A yellow pine, 4 ins. diam., bears S.16 $\frac{1}{2}$ °W., 24 lks. dist., mkd. T14N R9E S19 BT.
- A yellow pine, 5 ins. diam., bears N.80°W., 47 lks. dist., mkd. T14N R9E S18 BT.
- Land: gently rolling.  
Soil: adobe, rocky, 3rd rate.  
Timber: pine, juniper, oak.  
Undergrowth: 2nd growth pine, scrub oak.
- 
- East, on random line, bet. secs. 17 and 20.
- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
- 80.06 A point 7 lks. S. of the cor. of secs. 16, 17, 20 and 21.  
Thence  
S.89°57'W., on true line, bet. secs. 17 and 20.  
Over flat; through tall dead grass of a field not being cultivated this year. Over patented land.
- 14.18 Wire fence along bdy. of H.E.S. No. 389.; leave field.
- 14.20 SE. cor. of Walker's new house bears N.6 $\frac{1}{2}$ °W., about 12 chs. dist.
- 14.23 Intersect the 7-8 line of H.E.S. No. 389 at a point 24.38 chs. S.8°42'E. of its cor. No. 8, which is a lava stone, 10 x 8 x 8 ins. above ground, firmly set and mkd. and witnessed as described in the official record.  
From intersection Cor. No. 7 bears S.8°42'E., 14.34 chs. dist., a lava stone, mkd. and witnessed as described in the official record.
- Leave patented land.
- 14.70 Road, bears N.9°W. and S.9°E.
- 17.70 Enter medium growth of pine, juniper and oak timber and scattering undergrowth, parallels H.E.S. bdy.
- 35.00 Change to gentle NE. slope; asc. 11 ft.
- 40.03 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

SUBDIVISIONS OF T.14 N., R.9 E.

Chains

1/4 S17

1/4 S20

1934

from which

A yellow pine, 40 ins. diam., bears N.18°W., 50 lks. dist., mkd. 1/4 S17 BT.

A yellow pine, 30 ins. diam., bears S.37 1/2°W., 80 lks. dist., mkd. 1/4 S20 BT.

Over flat, drains NE.

55.00 Asc. 171 ft. over NE. slope.

78.60 Short spur, slopes N.; desc. 9 ft.

80.06 The cor. of secs. 17,18,19 and 20.

Land: flat and rolling.  
Soil: adobe, 2nd and 3rd rates.  
Timber: pine, juniper, oak.  
Undergrowth: 2nd growth pine.

S.89°57'W., on random line, bet. secs. 18 and 19.

40.00 Set temp. 1/4 sec. cor.

65.76 A point 6 lks. S. of the cor. of secs. 13,18,19 and 24, on the W. bdy. of the Tp., hereinbefore described.

Thence

East, on true line, bet. secs. 18 and 19.

Over flat, drains SW.; through medium growth of pine, oak and juniper and scattering undergrowth.

15.00 Small wash, course SW.; asc. 41 ft. over NW. slope.

23.50 Short spur, slopes S.; over SE. slope.

25.76 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, and in a mound of stone to top, for 1/4 sec. cor., with brass cap mkd.

1/4 S18

1/4 S19

1934

from which

A yellow pine, 18 ins. diam., bears S.36°W., 47 lks. dist., mkd. 1/4 S19 BT.

A yellow pine, 14 ins. diam., bears N.6 1/2°E., 33 lks. dist., mkd. 1/4 S18 BT.

Desc. 12 ft. over gentle SE. slope.

35.60 Change to W. slope; asc. 120 ft.

48.30 Fence, bears N. and S.

52.90 Fence, bears NE. and SW.

65.76 The cor. of secs. 17,18,19 and 20.

SUBDIVISIONS OF T.14 N., R.9 E.

Chains

Land: gently rolling.  
Soil: adobe, 2nd and 3rd rate.  
Timber: pine, juniper, oak.  
Undergrowth: 2nd growth pine, scrub oak.

N.0°11'W., bet. secs. 17 and 18.

Desc. 154 ft. over NW. slope; through medium growth of pine and juniper timber and scattering undergrowth.

- 8.60 Fence, bears E. and SW.
- 19.60 Foot of slope; over flat.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, supported in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.




from which

- A yellow pine, 16 ins. diam., bears N.42 $\frac{1}{2}$ °E., 6 lks. dist., mkd.  $\frac{1}{4}$  S17 BT.
- A yellow pine, 18 ins. diam., bears S.86 $\frac{1}{4}$ °W., 108 lks. dist., mkd.  $\frac{1}{4}$  S18 BT.

Over gentle S. and SE. slopes.

- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground, supported in a mound of stone, for cor. of secs. 7, 8, 17 and 18, with brass cap mkd.



from which

- A yellow pine, 10 ins. diam., bears N.12°E., 82 lks. dist., mkd. T14N R9E S8 BT.
- A yellow pine, 10 ins. diam., bears S.67 $\frac{1}{4}$ °E., 30 lks. dist., mkd. T14N R9E S17 BT.
- A yellow pine, 14 ins. diam., bears S.62°W., 157 lks. dist., mkd. T14N R9E S18 BT.
- A yellow pine, 20 ins. diam., bears N.80 $\frac{1}{4}$ °W., 137 lks. dist., mkd. T14N R9E S7 BT.

Land: flat and gently rolling.  
Soil: adobe, 2nd rate.  
Timber: pine, juniper.  
Undergrowth: 2nd growth pine. Fair grass.



SUBDIVISIONS OF T.14 N., R.9 E.

BOOK 4031

Chains

N.89°57'E., on random line, bet. secs. 8 and 17.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.12 A point 5 lks. S. of the cor. of secs. 8,9,16 and 17.

Thence

S.89°55'W., on true line, bet. secs. 8 and 17.

Over flat, drains SE.; through open pine and juniper timber.

20.04 Fence, bears N. and S.

40.06 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$  S 8  
S17

1934

from which

A yellow pine, 20 ins. diam., bears S.33°W., 116 lks. dist., mkd.  $\frac{1}{4}$  S17 BT.

A yellow pine, 20 ins. diam., bears N.64 $\frac{1}{2}$ °W., 95 lks. dist., mkd.  $\frac{1}{4}$  S8 BT.

80.12 The cor. of secs. 7,8,17 and 18.

Land: flat.  
Soil: adobe, 2nd rate.  
Timber: pine, juniper, oak.  
Undergrowth: 2nd growth pine.

West, on random line, bet. secs. 7 and 18.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

65.44 Intersect the cor. of secs. 7,12,13 and 18, on the W. bdy. of the Tp., hereinbefore described.

Thence

East, on true line, bet. secs. 7 and 18.

Over flat, drains SW.; through medium growth of pine, oak and juniper timber and scattering undergrowth.

25.44 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, supported in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$  S 7  
S18

1934

from which

A pine, 6 ins. diam., bears S.20 $\frac{1}{2}$ °W., 23 lks. dist., mkd.  $\frac{1}{4}$  S18 BT.

A pine, 10 ins. diam., bears N.25°W., 37 lks. dist., mkd.  $\frac{1}{4}$  S7 BT.

## SUBDIVISIONS OF T.14 N., R.9 E.

Chains

- 40.00 Top of ascent; over flat, drains SE.  
 48.67 Fence N. and S.  
 65.44 The cor. of secs. 7, 8, 17 and 18.

Land: flat.  
 Soil: adobe, 2nd rate.  
 Timber: pine, juniper, oak.  
 Undergrowth: same and sage.

N.0°11'W., bet. secs. 7 and 8.

Desc. 20 ft. over gentle NE. slope; through scattering pine and juniper timber and undergrowth.

20.00 Over flat, drains E.

38.20 Fence, bears E. and W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground, supported in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S7 | S8

1934

from which

A yellow pine, 14 ins. diam., bears S.76 $\frac{1}{2}$ °E., 26 lks. dist., mkd.  $\frac{1}{4}$  S8 BT.

A yellow pine, 12 ins. diam., bears N.52 $\frac{1}{4}$ °W., 17 lks. dist., mkd.  $\frac{1}{4}$  S7 BT.

Asc. 86 ft. over gradual S. slope.

60.20 Old road, bears E. and W.

76.00 Low divide, bears E. and W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground, supported in a mound of stone, for cor. of secs. 5, 6, 7 and 8, with brass cap mkd.

T14NR9E

S6 | S5  
 S7 | S8

1934

from which

A pine, 24 ins. diam., bears N.62 $\frac{1}{2}$ °E., 59 lks. dist., mkd. T14N R9E S5 BT.

A yellow pine, 14 ins. diam., bears S.11°E., 29 lks. dist., mkd. T14N R9E S8 BT.

A yellow pine, 16 ins. diam., bears S.18 $\frac{1}{2}$ °W., 17 lks. dist., mkd. T14N R9E S7 BT.

A yellow pine, 6 ins. diam., bears N.75 $\frac{1}{4}$ °W., 67 lks. dist., mkd. T14N R9E S6 BT.

Land: gently rolling.  
 Soil: adobe, 2nd rate.  
 Timber: pine, oak, juniper.  
 Undergrowth: 2nd growth pine. Fair grass.

SUBDIVISIONS OF T.14 N., R.9 E.

Chains  
N.89°55'E., on random line, bet. secs. 5 and 8.  
40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
80.06 A point 12 lks. N. of the cor. of secs. 4,5,8 and 9.  
Thence  
West, on true line, bet. secs. 5 and 8.  
Asc. 87 ft. over gentle NE. slope; through medium pine, oak and juniper timber and scattering undergrowth.

25.00 Over flat, drains N.  
40.03 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$  S 5  
S 8

1934

from which

A yellow pine, 14 ins. diam., bears S.56 $\frac{1}{4}$ °E., 28 lks. dist., mkd.  $\frac{1}{4}$  S8 BT.

A yellow pine, 6 ins. diam., bears N.50°E., 42 lks. dist., mkd.  $\frac{1}{4}$  S5 BT.

80.06 The cor. of secs. 5,6,7 and 8.

Land: gently rolling and flat.  
Soil: adobe, rocky, 2nd and 3rd rates.  
Timber: pine, juniper, oak.  
Undergrowth: 2nd growth pine. Fair grass.

West, on random line, bet. secs. 6 and 7.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

65.18 A point 6 lks. N. of the cor. of secs. 1,6,7 and 12, on the W. bdy. of the Tp., hereinbefore described.

Thence

N.89°57'E., on true line, bet. secs. 6 and 7.

Over gentle NE. slope; through medium pine, juniper and oak timber and scattering 2nd growth pine.

15.10 Head of drain, course NE.; over N. slope.

25.18 Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$  S 6  
S 7

1934

from which

A yellow pine, 10 ins. diam., bears S.37 $\frac{1}{2}$ °W., 63 lks. dist., mkd.  $\frac{1}{4}$  S7 BT.

SUBDIVISIONS OF T.14 N., R.9 E.

Chains

A yellow pine, 4 ins. diam., bears N.55½°W., 32 lks. dist., mkd. ½ S6 BT.

35.20 Spur, slopes NE.; desc. 31 ft. over NE. slope.

65.18 The cor. of secs. 5,6,7 and 8.

Land: gently rolling.  
Soil: adobe, rocky, 2nd and 3rd rates.  
Timber: pine, juniper, oak.  
Undergrowth: 2nd growth pine. Fair grass.

N.0°11'W., bet. secs. 5 and 6.

Over gently rolling land, drains N.; through medium pine, juniper and oak timber and very scattering 2nd growth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground, and in a mound of stone to top, for ¼ sec. cor., with brass cap mkd.

½  
S6 | S5  
1934

from which

A yellow pine, 12 ins. diam., bears N.58½°E., 67 lks. dist., mkd. ¼ S5 BT.

A yellow pine, 18 ins. diam., bears S.28½°W., 62 lks. dist., mkd. ¼ S6 BT.

Desc. 12 ft. over gentle N. slope.

46.50 A wide draw, course ESE.; asc. 29 ft. over S. slope.

69.10 Point of spur, slopes SE.; over E. slope.

82.32 Intersect the S. bdy. of T.15 N., R.9 E. At intersection

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground, and in a mound of stone to top, for closing cor. of secs. 5 and 6, with brass cap mkd.

T15NR9E  
S32  
S6 | S5  
C C  
T14N  
1934

from which

A yellow pine, 12 ins. diam., bears S.51½°E., 62 lks. dist., mkd. T14N R9E S5 CC BT.

A yellow pine, 10 ins. diam., bears S.13½°W., 58 lks. dist., mkd. T14N R9E S6 CC BT.

From point of intersection the cor. of secs. 31 and 32, only, bears N.89°54'W., 3.85 chs. dist.; the ¼ sec. cor. of sec. 32, only, bears S.89°54'E., 36.24 chs. dist., both hereinbefore described.

Land: gently rolling.  
Soil: adobe, rocky, 2nd and 3rd rates.  
Timber: pine, juniper, oak.  
Undergrowth: 2nd growth pine.

## FINAL TEST OF SOLAR ATTACHMENT

August 5, 1934: on the meridian described on page 1 of Book "B" of this Group, we set off  $34^{\circ}30'$  on the lat. arcs and  $17^{\circ}05'$  N. on the decl. arcs, and at 8 a.m., app.t., orient the instruments with the solars; the lines of sight agree within  $1\frac{1}{2}'$  with the meridian established by Polaris observation

At 4 p.m., app.t., with the same lat. setting, we set off  $16^{\circ}59\frac{1}{2}'$  N. on the decl. arcs and repeat the tests of the solars; the line of sight of each agrees within  $1\frac{1}{2}'$  with the Polaris meridian.

## GENERAL DESCRIPTION

The township lies about 20 miles N. of the town of Pine, Ariz. and about 40 miles southerly of Flagstaff, Ariz.; a highway connecting the two towns runs through the NE. cor. of the township. Branch roads from the highway give access to every part of the township.

It lies on the W. side of the area known as the Mogollon Mesa, with the sea-level elevation varying from about 7300 ft. in the SE. cor. to 5800 ft. in the bottom of Clear Cr. canyon in the SW. The drainage is W. and SW. into W. Clear Cr., which leaves the Tp. in the SW. cor.

Land is almost all of volcanic origin, nearly all a heavy adobe, occasionally lightened by leaf mold. It is generally shallow with considerable rock content.

The NW. cor. of the tp. is gently rolling with few perceptible water channels; the remainder of the tp. is more rolling and is cut by the sharp canyons of Clear Creek and its branches.

Clear Creek carries an excellent stream of water. Willow Creek, which runs southerly into Clear Creek, exposes a smaller stream in the less porous parts of its channel. The tp. otherwise has no water except in wells and reservoirs.

The tp. is covered by an excellent growth of yellow pine timber of merchantable size and less amounts of oak and juniper. Except in the canyons there is little undergrowth.

The area is used for grazing purposes, in connection with which considerable fences, reservoirs, etc. have been built. There are two sets of ranch buildings in the tp.; the grazing setups are used only in the summers.

No mineral was observed.

4-680  
(August, 1926)

**FIELD ASSISTANTS.**

NAMES.	CAPACITY.
Raymond S. Davis	1st Chainman
Stanley S. Palmer	1st Chainman
Glen Greenhaw	1st Chainman
Claude A. Mulkey	2nd Chainman
Orland Parks	2nd Chainman
Robert R. Riesgo	Moundsman
Claude Burk	Moundsman
Gilden Redewill	Flagman
Harry Wintz	Flagman
Ernest Cooley	Axman
George Godfrey	Axman
Tom Scrivener	Axman
Shamus O'Brien	Axman
J. William Estes	Axman
James R. Burger	Axman
Chester R. Hoefs	Axman
Jake Spillman	Axman

CERTIFICATE OF UNITED STATES SURVEYOR

BOOK 4031

Chas. W. Devendorf, U.S. Cadastral Engineer, and  
Benj. J. Mollette, U.S. Transitman

hereby certify upon honor that, in pursuance  
of special instructions received from the District Cadastral Engineer for Arizona

bearing date of the 20th day of March, 1934, we have well, faithfully, and truly

in our own proper persons, and in strict conformity with said instructions, the Manual of Surveying Instruc-  
tions, and the laws of the United States, ~~resurveyed~~ all those parts or portions of the West boundary of  
Township 14 North, Range 10 East; resurveyed the South boundary of Township 15  
North, Range 9 E., and surveyed all those parts or portions of the West Boundary  
and Subdivision Lines of

Township 14 North, Range 9 East

of the Gila and Salt River

Meridian, in the State of Arizona, which are represented in

the foregoing field notes as having been executed by us, and under our direction; and that all the corners of  
~~resurvey and~~  
said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instruc-  
tions, and the special written instructions of the District Cadastral Engineer for Arizona

and in the specific manner described in the field notes, and that the foregoing are the original field notes of  
such ~~resurvey and~~ survey.

*Benjamin J. Mollette*

U.S. Transitman  
Phoenix, Ariz.  
Nov. 14, 1934.

*Chas. W. Devendorf*

U.S. Cadastral Engineer  
Sante Fe, N.M.  
Nov. 19, 1934.

APPROVAL

OFFICE OF U. S. SUPERVISOR OF SURVEYS,

Denver, Colorado FEB 28, 1935

The foregoing field notes of the ~~resurvey of the West Boundary of Township 14 North,~~  
~~Range 10 East; resurvey of the South Boundary of Township 15 North, Range 9 East;~~  
and of the survey of the West boundary and all of the subdivisional lines of

Township 14 North, Range 9 East

of the Gila and Salt River Meridian, in the State of Arizona

executed by Chas. W. Devendorf, U.S. Cadastral Engineer & Benj. J. Mollette, U.S. Transitman

under special instructions dated March 20, 1934,

critically examined, and the necessary corrections and explanations made, the said field notes  
and surveys they describe, are hereby approved.

*Wm. H. ...*  
U. S.

~~I certify that the foregoing transcript of the field notes of the above described~~  
~~has been correctly copied from the original notes of~~