

FIELD NOTES

OF THE SURVEY OF THE

East boundary,

West Boundary,

North Boundary and

Subdivision lines of

Township 38 North, Range 10 West

Of the Gila and Salt River Base and Meridian,

In the State of ARIZONA

EXECUTED BY

John L. Warboys, U.S. Cadastral Engineer,

Ben D. Procter, U.S. Transitman and

J.P. Hester, U.S. Transitman,

In the capacity of U. S. Surveyors, under Special Instructions dated September 15, 1933, issued by the District Cadastral Engineer to govern surveys included in Group No. 188, Arizona, which were approved by the Commissioner of the General Land Office, October 9, 1933, and Assignment Instructions dated ^{May 21} June 6¹⁹, 1934.

Survey commenced June 25, 1934

Survey completed July 7, 1934

4037

4037

INDEX DIAGRAM.

Township _____, Range _____

6	5	4	3	2	1
7	8	9	10	11	12
13	17	16	15	14	13
19	20	21	22	23	24
29	30	28	27	26	25
31	32	33	34	35	36

•INDEX-DIAGRAM•

BOOK 4037

16 15			15 14		14		13		13 12		12 11	
11				44		37						
	6	56	5		4		3	30	2	23	1	5
10				45		38						
	55		55	54	44		37		30	29	23	22
10	7	54	8	43	9	36	10	29	11	22	12	5
	53	54	53		43	42	36	35	28		21	4
9	18	52	17	42	16	35	15	28	14	21	13	4
	51		51	50	T.38N. R.10W.		27			20		
					42	41	34		27		20	
8	19	50	20	41		34						
				40	21		22	26	23	19	24	3
	49		49	48	40	33			26	25	19	18
7	30	48	29	39	28	32	27	25	26	18	25	3
		47								17		2
	47		46		39	38	32		24		17	
6	31	45	32	38	33	31	34	24				
								23	35	16	36	2

———— Accepted surveys.

- - - - - Unsurveyed.

———— Surveyed under this group.

 Areas surveyed as per accepted plats on file.

Township 38 North, Range 10 West

BOOK 4037

The surveys hereinafter described were executed with light-mountain solar transits made by Young & Sons, Serial No. 8478, used by John L. Warboys, U.S.C.E., No. 8592, used by Ben D. Procter, U.S.T., and No. 8477, used by J.P. Hester, U.S.T. The instruments were constructed in accordance with the standard specifications of the General Land Office; they have horizontal circles with diameters of $4\frac{1}{2}$ ins., with two double verniers placed opposite each other reading to single minutes and have vertical circles with diameters of 5 ins., with one double vernier reading to single minutes. The telescopes have fixed stadia wires with a ratio of 1-132 and a focal constant of 1.5 lks.

The instruments are equipped with improved Smith solar attachments, radius of latitude arcs $3\frac{1}{4}$ ins. and of declination arcs 3.87 ins., each with verniers reading to single minutes. The instruments were in good condition, and having been placed in good adjustment prior to beginning the survey, were approved by the district cadastral engineer on May 21, 1934.

The directions of the lines were determined by solar transit method. The measurements were made on the slope with Lallie and Lufkin steel tapes, 5 chs. in length, graduated every link for the first 100 lks. and the balance at intervals of 10 lks. The tapes were tested by comparison with a Lufkin standard and found correct. The vertical angle of each interval was ascertained with a clinometer in good adjustment; the horizontal equivalents are entered in the field note record.

The data furnished with the special instructions gives the geographic position for the SE. cor. of the Tp. as follows: latitude $36^{\circ}38'29''$ N., longitude $113^{\circ}19'39''$ W. The latitude has been checked by recent adjoining surveys and no preliminary latitude test is made.

June 26, 1934: at camp in the NW. $\frac{1}{4}$ of the NE. $\frac{1}{4}$ of sec. 34, T.38 N., R.10 W., using transit No. 8477, at 1^h28^m a.m., observe Polaris at eastern elongation, making four observations, two each with the telescope in direct and reversed positions and mark the mean point on a stake about 8 chs. N.

After daybreak we turn off the azimuth of Polaris, $1^{\circ}19'$ to the W. and mark the meridian thus determined with a tack in a stake driven firmly into the ground about 8 chs. North.

Every 30 min. from 7 to 11 a.m. and from 1 to 5 p.m., we make proper settings on the arcs of the solar attachments and ascertain that the resulting orientation of the instruments, when compared with the meridian established by Polaris observation, have a maximum error of less than $1'30''$.

We repeat the tests of the arcs daily by noon observation and verify the meridional indications frequently during the period of the survey.

Observed magnetic declination is $16^{\circ}15'E$.

EAST BOUNDARY OF T.38 N., R.10 W.

Chains

Beginning at the cor. of Tps. 37 and 38 N., Rs. 9 and 10 W., an iron post, 3 ins. diam., projecting 4 ins. above a small mound of stone, firmly set and properly mkd. on brass cap, dated 1932, and witnessed as described in the official record,

North, on true line, bet. secs. 31 and 36.

Desc. 20 ft. over gentle N. slope; through sagebrush.

- 7.00 Drain, course N.70°E., 3 chs. to beginning of small canyon course N.20°E.; desc. 48 ft.
- 19.20 Small draw, course N.70°E.; asc. 15 ft.
- 22.00 Change to N. slope; desc. 52 ft.
- 35.00 Small draw, course NE.; over E. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\begin{array}{c} \uparrow \\ \text{S36} \mid \text{S31} \\ \text{1934} \end{array}$$

and raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Desc. 30 ft. over NE. slope.

- 47.60 Road, bears E. and W.
- 50.00 Swale, drains S.70°E.; asc. 49 ft. over S. slope.
- 63.50 Road, bears N.20°E. to Navajo Trail and S.20°W.
- 75.00 Change to N. slope; desc. 20 ft.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 3 ins. in the ground to cross (X) on bedrock, and in a mound of stone, 4 ft. base, 2 ft. high, for cor. of secs. 25, 30, 31 and 36, with brass cap mkd.

$$\begin{array}{c} \text{T38N} \\ \text{R10W} \mid \text{R9W} \\ \text{S25} \mid \text{S30} \\ \text{S36} \mid \text{S31} \\ \text{1934} \end{array}$$

Land: rolling hills, flat draws and sharp spurs.

Soil: gravel, rock and sand, 3rd rate.

No timber. Undergrowth: sage and a few cacti.

North, bet. secs. 25 and 30.

Desc. 17 ft. over N. slope; through scattering sagebrush.

- 2.40 Drain, course N.70°E.; asc. 16 ft.
- 10.00 Change to N. slope; desc. 65 ft.
- 32.30 Drain, course E.; asc. 11 ft.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, with a stone, mkd. X, deposited at base, and

EAST BOUNDARY OF T.38 N., R.10 W.

4087

Chains

supported in a mound of stone, 4 ft. base, 1½ ft. high,
for ¼ sec. cor., with brass cap mkd.

S25 | S30
1934

Desc. 34 ft. over NE. slope.

47.00 Road, bears NW. and SE., in wash, course SE.; Asc. 30 ft.

70.60 Old road, bears NW. and SE.; desc. 16 ft.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the
ground, for cor. of secs. 19, 24, 25 and 30, with brass cap
mkd.

T38N
R10W R9W
S24 | S19
S25 | S30
1934

and raise a mound of
stone, 3½ ft. base, 2½ ft. high, W. of cor.

Land: rolling hills and grassy draws.

Soil: gravel, sand and rock, 2nd rate.

No timber. Undergrowth: sage, soapweed, cactus.

North, bet. secs. 19 and 24.

Desc. 51 ft. over gentle N. slope; through scattering sage-
brush.

33.30 Old road, bears NW. and SE.

34.70 Main wash, course NW.; over gentle SW. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the
ground, for ¼ sec. cor., with brass cap mkd.

S24 | S19
1934

and raise a mound
of stone, 2 ft. base, 1½ ft. high, W. of cor.

Asc. 28 ft. over gentle SW. slope.

61.00 Drain, 5 ft. deep, course S.70°W.; asc. 109 ft. over S.
slope.

71.00 Rimrock, 15 ft. high, bears NW. and SE.

71.20 Low ridge, bears N.15°W. and S.15°E.; desc. gently.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the
ground, supported in a mound of stone, 2 ft. base, 1 ft.
high, for cor. of secs. 13, 18, 19 and 24, with brass cap
mkd.

T38N
R10W R9W
S13 | S18
S24 | S19
1934

EAST BOUNDARY OF T.38 N., R.10 West

Chains

and raise a mound of
stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land: rolling.

Soil: gravel and sand, rocky, 3rd rate.

No timber. Undergrowth: sage, Mormon tea, cactus.

North, bet. secs. 13 and 18.

Desc. 30 ft. over NE. slope; through scattering brush.

- 6.20 Drain, course E.; desc. 30 ft.
- 16.50 Ravine, course E.; asc. 28 ft.
- 24.50 Change to N. slope; desc. 36 ft.
- 26.00 Old road, bears NW. and SE.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bedrock, with a stone mkd. X deposited at base, supported in a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\begin{array}{c} \uparrow \\ \text{S13} \mid \text{S18} \\ \text{1934} \end{array}$

Desc. 15 ft. over N. slope.

- 45.00 Drain, course E.; asc. 6 ft.
- 50.00 Over gentle N. slope.
- 70.20 Old wagon road, bears NE. and SW.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, with brass cap mkd.

$\begin{array}{c} \text{T38N} \\ \text{R10W} \mid \text{R9W} \\ \text{S12} \mid \text{S7} \\ \text{S13} \mid \text{S18} \\ \text{1934} \end{array}$

and raise a mound of
stone, 3 ft. base, $2\frac{1}{2}$ ft. high, W. of cor.

Land: rolling.

Soil: gravel, sand and rock.

No timber. Undergrowth: sage, Mormon tea, cactus.

North, bet. secs. 7 and 12.

Over gentle N. slope; through scattering undergrowth.

- 22.30 Old road, bears NE. and SW.; over gentle S. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\begin{array}{c} \uparrow \\ \text{S12} \mid \text{S7} \\ \text{1934} \end{array}$

EAST BOUNDARY OF T.38 N., R.10 W.

4037

Chains

and dig pits, 18 x 18 x 12 ins., N. and S. of post, 3 ft. dist.

Over gentle N. slope.

50.10 Drain, course E.; desc. 12 ft.

53.60 Drain, course S.70°E.; asc. 23 ft.

56.30 Small knoll, on line; desc. 58 ft.

64.30 Enter E. side of wide draw, course N.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 1,6,7 and 12, with brass cap mkd.

T38N
R10W R9W
S1 S6
S12 S7
1934

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land: rolling.

Soil: sand and gravel, 2nd rate.

No timber. Undergrowth: sage, bayonet, cactus.

North, bet. secs. 1 and 6.

Over gentle N. slope; through scattering undergrowth.

16.40 Drain, course NW.; asc. gently.

21.40 Road, bears NW. and SE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor.; with brass cap mkd.

S1 S6
1934

and raise a mound of stone, 2½ ft. base, 2 ft. high, W. of cor.

Leave bottom, bears NW. and SE.; asc. 23 ft.

46.60 Change to N. slope; desc. 12 ft.

66.60 Small drain, course N.70°W.; asc. 17 ft.

71.50 Change to gentle N. slope.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in the ground, for cor. of Tps. 38 and 39 N., Rs. 9 and 10 W., with brass cap mkd.

T39N
R10W R9W
S36 S31
S1 S6
T38N
1934

EAST BOUNDARY OF T.38 N., R.10 W.

Chains

and raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

Top of red rocky knoll bears S.65 $\frac{1}{2}$ °W.

Wash at foot of "Navajo Trail" bears N.31°20'E.

Cor. stands about 2 $\frac{1}{2}$ miles W. of Hurricane Rim and is about 6 miles due South of another point on same.

Land: gently rolling.

Soil: sand and gravel, 2nd rate.

No timber. Undergrowth: sage, Spanish dagger, cactus.

WEST BOUNDARY OF T. 38 N., R.10 W.

Beginning at the cor. of Tps. 37 and 38 N., Rs. 10 and 11 W., an iron post, 3 ins. diam., projecting 4 ins. above a large mound of stone, firmly set and properly mkd. on brass cap, dated 1924, and witnessed as described in the official record.

North, on true line, bet. secs. 31 and 36.

Desc. 30 ft. over NW. slope; through scattering desert growth.

- 1.30 Small rocky canyon, course NE.; asc. 53 ft.
- 8.70 Spur, slopes NE.; desc. 32 ft.
- 13.80 Ravine, course NE.; asc. 12 ft.
- 16.30 Spur, slopes NE.; desc. 20 ft.
- 20.30 Ravine, course E.; asc. 26 ft.
- 23.20 Spur, slopes E.; desc. 25 ft.
- 26.50 Ravine, course E.; asc. 12 ft.
- 29.70 Spur, slopes E.; desc. 27 ft.
- 32.00 Small ravine, course E.; asc. 21 ft.
- 34.70 Spur, slopes E.; desc. 20 ft.
- 38.00 Head of ravine, course NE.; asc. slightly.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground, with a stone mkd. X deposited at base, supported in a mound of stone, 3 ft. base, 2 ft. high, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
- $\frac{1}{4}$
 S36 | S31
 1934
- 43.00 Low rocky spur, slopes NE.; desc. 36 ft.
- 44.40 Small ravine, course NE.; asc. 11 ft.
- 46.10 Point of spur, slopes E.; desc. 45 ft.
- 47.50 Canyon, course E.; desc. 15 ft.
- 52.50 Canyon, course S.70°E.; asc. 62 ft.

WEST BOUNDARY OF T.38 N., R. ¹⁰ ~~22~~ W.

4037

Chains
 56.00 Spur, slopes SW.; desc. 32 ft.
 64.30 Small drain, course SW.; over gently rolling land.
 67.60 Old road, bears N.70°W. and S.70°E.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to bedrock, with a stone mkd. X deposited at base, and supported in a mound of stone, 3 ft. base, 1½ ft. high, for cor. of secs. 25,30,31 and 36, with brass cap mkd.

T38N
 R11W R10W
 S25 | S30
 S36 | S31
 1934

Land: rolling and broken.
 Soil: gravel and rock, 3rd rate.
 No timber. Undergrowth: sage, Spanish bayonet, cactus.

North, bet. secs. 25 and 30.

Desc. 12 ft. over N. slope; through scattering desert growth.

2.60 Small drain, course E.; asc. 15 ft.
 7.30 Low spur, slopes S.70°E.; desc. 30 ft.
 16.30 Small draw, course SE.; asc. 22 ft.
 20.20 Spur, slopes SE.; spur, slopes NE.; desc. 171 ft. over general NW. slope.
 35.20 Small canyon, old road in bottom, course NE.; asc. 44 ft.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bedrock, with a stone mkd. X deposited at base, supported in a mound of stone, 3 ft. base, 2 ft. high, for ¼ sec. cor., with brass cap mkd.

¼
 S25 | S30
 1934

40.30 Point of rocky spur, slopes NE.; desc. 40 ft.
 41.30 Ravine, course E.; asc. 103 ft. over S. slope.
 46.70 Rimrock, faces S.; desc. 61 ft. over increasing N. slope.
 63.80 Ravine, course NE.; asc. 36 ft.
 71.80 Enter barberry undergrowth
 79.90 Low ridge, bears NE. and SW.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground to bedrock, with a stone mkd. X deposited at base, supported in a mound of stone, 4 ft. base, 2 ft. high, for cor. of secs. 19,24,25 and 30, with brass cap mkd.

WEST BOUNDARY OF T.38 N., R.10 W.

Chains

T38N
R11W R10W
S24 | S19
S25 | S30
1934

Land: rolling.
Soil: gravel and rock, 3rd rate.
No timber. Undergrowth: sage, barberry, cactus.

North, bet. secs. 19 and 24.

Desc. 85 ft. over increasing N. slope; through scattering undergrowth.

12.50 Ravine, course NE.; continue descent 90 ft.

26.70 Short ravine, course NE.

27.60 Wash, 15 lks. wide, in ravine, course NE.; asc. 47 ft.

39.90 Spur, slopes SE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone, 3 ft. base, 1 1/2 ft. high, for 1/4 sec. cor., with brass cap mkd.

1/4
S24 | S19
1934

Cor. stands 2 chs. E. of main draw, course N.

Desc. 49 ft. over NE. slope.

46.50 Mouth of small ravine, course E.; asc. 70 ft.

52.00 Point of spur, slopes SE.; desc. 119 ft.

64.60 Mouth of ravine, course E.; asc. 58 ft.

64.90 Old road, bears NE. and S.70°W.

71.70 Spur, slopes E.; desc. 35 ft.

74.20 Mouth of small ravine, course E.; asc. 15 ft.

74.70 Spur, slopes E.; desc. 30 ft.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 13, 18, 19 and 24, with brass cap mkd.

T38N
R11W R10W
S13 | S18
S24 | S19
1934

and raise a mound of stone, 2 1/2 ft. base, 2 ft. high, W. of cor.

Land: rolling and broken.
Soil: gravel and rock, 3rd rate.
No timber. Undergrowth: sage, barberry, Mormon tea, cactus.

WEST BOUNDARY OF T.38 N., R.10 W.

4037

Chains
 North, bet. secs. 13 and 18.
 Desc. 14 ft. over N. slope; through scattering undergrowth.
 4.00 Drain, course S.70°E.; asc. 148 ft. over S. slope.
 14.70 Spur, slopes E.
 17.60 Spur, slopes N.30°E.; desc. 84 ft..
 27.70 Ravine, course NE.; asc. 34 ft.
 34.30 Spur, slopes NE.; desc. 26 ft.
 36.70 Drain, course NE.; asc. 8 ft.
 38.40 Spur, slopes E.; desc. slightly..
 39.70 Drain, course S.70°E.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bedrock, with a stone mkd. X deposited at base, supported in a mound of stone, 2½ ft. base, 2 ft. high, for ¼ sec. cor., with brass cap mkd.

$\frac{1}{4}$
 S13 | S18
 1934

Asc. 12 ft. over S. slope.
 44.00 Spur, slopes SE.; desc. 7 ft.
 46.10 Drain, course SE.; asc. 24 ft.
 49.10 Spur, slopes SE.; desc. 9 ft.
 51.80 Drain, course SE.; asc. 175 ft. over SW. slope.
 58.40 Rimrock, bears SE. and NW.; desc. 15 ft.
 61.00 Small drain, course S.70°E.; asc. slightly.
 63.40 Spur, slopes SE.; desc. 166 ft.
 72.50 Small canyon, course S.60°E.; asc. 28 ft.
 79.10 Spur, slopes SE.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in the ground, with a stone mkd. X deposited at base, and supported in a mound, 4 ft. base, to top, for cor. of secs. 7, 12, 13 and 18, with brass cap mkd.

T38N
 R11W R10W
 S12 | S7
 S13 | S18
 1934

Land: rolling and broken.
 Soil: gravel, rocky, 3rd rate.
 No timber. Undergrowth: sage, barberry, Mormon tea.

WEST BOUNDARY OF T.38 N., R.10 W.

Chains	
	North, bet. secs. 7 and 12.
	Asc. 105 ft. over S. slope; through scattering undergrowth.
8.10	Rimrock, faces S. on ridge, bears E. and W.; desc. 26 ft.
11.60	Spur, slopes N.70°E.; desc. 141 ft. over N. slope.
18.20	Small canyon, course NE.; asc. slightly.
26.20	Spur, slopes E.; desc. 15 ft.
30.60	Drain, course E.; asc. 15 ft.
34.10	Spur, slopes E.; desc. 15 ft.
35.10	Head of ravine, course NE.; asc. 15 ft.
37.40	Spur, slopes E.; asc. 12 ft.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground, with a stone mkd. X deposited at base, supported in a mound of stone, 2½ ft. base, 2 ft. high, for 1 sec. cor., with brass cap mkd.
	$\begin{array}{c} \frac{1}{4} \\ 812 \mid 87 \\ 1934 \end{array}$
	Asc. 29 ft. over S. slope.
45.00	Ridge, bears NE. and SW.; desc. 166 ft. over increasing N. slope.
54.80	Canyon, course N.70°E.; asc. 120 ft. over S. slope.
62.20	Spur, slopes NE.; desc. 61 ft.
66.90	Ravine, course N.60°E.; asc. 60 ft.
70.80	Spur, slopes N.70°E.; desc. 95 ft. over N. slope.
78.00	Rimrock, bears NW. and SE.
80.00	True point for cor. of secs. 1,6,7 and 12 falls on sloping limestone bedrock. Mark cross (X) at true point.
	Land: rolling and broken. Soil: gravel and rock, 3rd rate. No timber. Undergrowth: sage, barberry, Mormon tea.
	----- From true point for cor. of secs. 1,6,7 and 12.
	North, bet. secs. 1 and 6.
0.10	(Set an iron post, 3 ft. long, 2 ins. diam., on exposed bedrock, supported in a mound of stone, 3 ft. base, 2½ ft. high, for witness cor. to cor. of secs. 1,6,7 and 12, with brass cap mkd.
	$\begin{array}{c} T38N \\ R11W \mid R10W \\ \hline 81 \mid 86 \\ \hline 812 \mid 87 \\ W C \\ 1934 \end{array}$
	Desc. 155 ft. over flattening N. slope; through scattering undergrowth.

WEST BOUNDARY OF T.38 N., R.10 W.

1907

Chains

- 16.00 Drain, course E.; continue descent 30 ft.
- 24.60 Draw, course NW.; asc. gently.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 2 sec. cor., with brass cap

31 | 36
 1934

and raise a mound of stone, 2½ ft. base, 2 ft. high, W. of cor.

- 41.10 Old road, bears NW. and SE.
- 60.00 Low flat spur, slopes SE.; desc. 19 ft.
- 78.00 Small drain, course E.; asc. 18 ft.
- 79.50 Over flat spur, slopes E.
- 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 26 ins. in the ground, for cor. of Tps. 38 and 39 N., Rs. 10 and 11 W., with brass cap mkd.

T39N
 R11W R10W

336 | 331
 31 | 36

T38N
 1934

and raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

Land: rolling and gently rolling.
 Soil: gravel and sand, 2nd and 3rd rates.
 No timber. Undergrowth: sage and a few cacti.

NORTH BOUNDARY OF T.38 N., R.10 W.

From the cor. of Tps. 38 and 39 N., Rs. 9 and 10 W.,

West, on random line, on N. bdy. of T.38 N., R.10 W., setting temp. 1 sec. and sec. cors. at intervals of 40.00 and 80.00 chs., respectively, until at

- 478.79 Fall 28 lks. S. of the cor. of Tps. 38 and 39 N., Rs. 10 and 11 W.

Returning to the cor. of Tps. 38 and 39 N., Rs. 9 and 10 W., hereinbefore described,

N.89°58'W., on true line, bet. secs. 1 and 36.

Over gently rolling land; through scattering undergrowth.

- 11.00 Low spur, slopes NW.; desc. 39 ft.
- 20.80 Wash, 25 lks. wide, road in bottom, course N.20°W.; over bottom land.
- 28.80 Leave same; asc. 45 ft. over E. slope.

NORTH BOUNDARY OF T.38 N., R.10 W.

Chains

- 38.50 Red rocky knoll bears S.30°23'W., about 25 chs. dist.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\begin{array}{r} \frac{1}{4}S36 \\ S1 \end{array}$$

1934

and raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.

Cor. stands on low spur, slopes NE.

Desc. 24 ft. over NW. slope.

T38N R10W

$$\begin{array}{r|l} S35 & S36 \\ S2 & S1 \end{array}$$

T38N

1934

and raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.

Land: gently rolling.

Soil: sand and gravel, 2nd rate.

No timber. Undergrowth: sage, bayonet, cactus.

N.89°58'W., bet. secs. 2 and 35.

Over gentle W. slope; through scattering undergrowth.

$$\begin{array}{r} \frac{1}{4}S35 \\ S2 \end{array}$$

1934

and raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

North Boundary of T.38 N., R.10 W.

Chains

- Over gentle S. slope.
- 44.50 Draw, 40 ft. deep, course S. for 1 ch., thence W.
- 51.70 Rimrock, faces SW.; desc. 108 ft.
- 59.60 Base of rocks; desc. 42 ft. over SW. slope.
- 63.60 Old road, bears NW. and SE.
- 64.40 Over gently rolling land, bears N. and S.
- 65.90 Wash, 30 lks. wide, course N.20°W.
- 73.00 Old road, bears N.20°E. and S.; asc. 13 ft. over gentle E. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 2,3,34 and 35, with brass cap mkd.

T39N R10W
 S34 | S35
 S3 | S2
 T38N
 1934

and raise a mound
 of stone, 3 ft. base, 2½ ft. high, W. of cor.

Land: rolling.
 Soil: sand and gravel, 2nd and 3rd rates.
 No timber. Undergrowth: sage, tumbleweed, a few cacti.

N.89°58'W., on true line, bet. secs. 3 and 34.

Asc. 38 ft. over gentle E. slope; through scattering undergrowth.

- 31.00 Old road, bears NE. and SW.; desc. gently.
- 37.30 Wash, 30 lks. wide, course N.20°E.; asc. 15 ft.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor., with brass cap mkd.

1/4 S34
 S3
 1934

and raise a mound of
 stone, 3 ft. base, 2½ ft. high, N. of cor.

- 42.35 Drain, course N.20°E.; asc. 12 ft.
- 49.50 Low spur, slopes NE.; asc. 7 ft.
- 56.20 Small drain, course NE.; asc. 55 ft.
- 79.00 Over flat spur, slopes NE.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 3,4,33 and 34, with brass cap mkd.

T39N R10W
 S33 | S34
 S4 | S3
 T38N
 1934

Chains

and raise a mound of
stone, 3 ft. base, 2 ft. high, W. of cor.

Land: gently rolling.
Soil: sand and gravel, 2nd rate.
No timber. Undergrowth: sage and a few cacti.

N.89°58'W., on true line, bet. secs. 4 and 33.

Over gentle NW. slope; through scattering undergrowth.

11.30 Drain, course NE.; asc. gently.

15.00 Low spur, slopes NE.

30.10 Drain, course NE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the
ground, for sec. cor., with brass cap mkd.

S33
S4
1934

and raise a mound of
stone, 3 ft. base, 2 ft. high, N. of cor.

Asc. 70 ft. over gentle E. slope.

41.50 Old road, bears N. and S.

55.05 Old road, bears N.60°E. and S.60°W.

65.00 Spur, slopes NE.; desc. slightly.

68.70 Small drain, course NE.; asc. 35 ft.

72.50 Spur, slopes NE.; desc. 26 ft.

74.60 Small ravine, course NE.; asc. 44 ft.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 4, 5, 32 and 33, with brass cap
mkd.

T39N R10W
S32 | S33
S5 | S4
T38N
1934

and raise a mound of
stone, 3 ft. base, 2ft. high, W. of cor.

Land: gently rolling and rolling.
Soil: gravel and rock, 2nd rate.
No timber. Undergrowth: sage and a few cacti.

N.89°58'W., bet. secs. 5 and 32.

Asc. 39 ft. over gentle E. slope; through scattering under-
growth.

18.98 Dam at C.Force ranch bears N.66°18'W.

19.20 Low ridge, bears NW. and SE.; low spur, slopes NE.

NORTH BOUNDARY OF T.38 N., R.10 W.

Chains

- 19.30 Rimrock, bears NW. and SE.; desc. 20 ft.
 20.70 Rimrock, bears NW. and SE.; desc. 114 ft.
 29.70 Small corral bears 3 chs. N.
 30.10 Road, bears NW. and SE.
 31.30 A dugout bears about 4 chs. N.
 33.00 E. side of corral bears 4 chs. N.
 33.10 Draw, course NW.; asc. gently.
 35.90 SW. corner of corral bears 2 chs. N.
 39.00 SW. cor. of wire corral bears 5 chs. N.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S32
 S5
 1934

and raise a mound of
 stone, 3 ft. base, 2 ft. high, N. of cor.

Clarence Force dugout bears N.58°53'E.

Over gentle E. slope.

- 50.00 Low flat spur, slopes N.; desc. gently.
 66.30 Drain, 8 ft. deep, course NE.
 66.50 Road, bears NE. and SW.
 70.00 Low spur, slopes NE.
 73.10 Drain, course NE.; asc. 30 ft.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground to bedrock, mkd. with cross (X), and in a mound of stone, 3 ft. base, 2 ft. high, for cor. of secs. 5,6,31 and 32, with brass cap mkd.

T39N R10W
 S31 | S32
 S6 | S5
 T38N
 1934

Land: rolling.

Soil: gravel and rock, 2nd and 3rd rates.

No timber. Undergrowth: sage, Mormon tea, cactus.

N.89°58'W., on true line, bet. secs. 6 and 31.

Asc. 15 ft. over SE. slope; through scattering undergrowth.

- 4.30 Spur, slopes NE.; spur, slopes E.; desc. 11 ft.
 5.70 Drain, course NE.; asc. 45 ft.
 11.80 Clarence Force's house bears N.85°40'E.
 12.20 Lava ridge, bears NW. and SE.; desc. 44 ft.

NORTH BOUNDARY OF T.38 N., R.10 W.

Chains	
27.20	Small drain, course NE.
32.20	Low spur, slopes NE.
37.20	Drain, course NE.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone, 2½ ft. base, 1½ ft. high, for ¼ sec. cor., with brass cap mkd.
	$\begin{array}{r} \frac{1}{4}S31 \\ \frac{1}{4}S36 \\ \hline 1934 \end{array}$
	Cor. stands on low spur, slopes NE.
60.30	Drain, course NE.
73.50	Low spur, slopes NE. from W.
74.30	Road, bears N. to Hurricane and S. to Mt. Trumbull.
78.79	The cor. of Tps. 38 and 39 N., Rs. 10 and 11 W., hereinbefore described.
	Land: gently rolling. Soil: gravel and rock, 2nd and 3rd rates. No timber. Undergrowth: sage, Mormon tea, cactus.

SUBDIVISIONS OF T.38 N., R.10 W.

Beginning at the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., an iron post, 2 ins. diam., projecting 4 ins. above a mound of stone, firmly set, properly mkd. on brass cap, dated 1932, and witnessed as described in the official record.

N.0°01'W., on true line, bet. secs. 35 and 36.

Over gently rolling land; through scattering undergrowth.

31.70	Road, bears NE. and SW.
32.60	Wire fence, 2-strand, bears NE. and SW.
36.80	Old road, bears NE. and SW.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for ¼ sec. cor., with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ S35 \mid S36 \\ \hline 1934 \end{array}$$

of stone, 3 ft. base, 2 ft. high, W. of cor. and raise a mound

45.60	Old road, bears E. and W.
65.90	Small drain, course NW.
66.70	Old road, bears NW. and SE.
69.40	Small drain, course NW.

SUBDIVISIONS OF T.38 N., R.10 W.

Chains

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, with brass cap mkd.

T38N R10W
 S26 | S25
 S35 | S36
 1934

and raise a mound
 of stone, 4 ft. base, 2 ft. high, W. of cor.

Land: gently rolling.

Soil: sand and gravel, 2nd rate.

No timber. Undergrowth: sage, greasewood.

 East, on random line, bet. secs. 25 and 36.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.08 A point 7 lks. N. of the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp., hereinbefore described.

Thence

N.89°57'W., on true line, bet. secs. 25 and 36.

Over gently rolling land; through scattering undergrowth.

0.60 Drain, course N., asc. 43 ft. over gentle E. slope.

12.00 Flat spur, slopes SE.; desc. 23 ft.

22.00 Draw, course S.; asc. 17 ft.

40.04 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S25
 S36
 1934

and raise a mound of
 stone, 3 ft. base, 2 ft. high, N. of cor.

Asc. 27 ft. over general E. slope.

45.30 Drain, course NE.

58.10 Low flat ridge, bears N. and S.; desc. 52 ft. over SW. slope.

67.60 Draw, course S.; asc. 29 ft. over SE. slope.

70.50 Spur, slopes S.; desc. 134 ft. over steep SW. slope.

80.08 The cor. of secs. 25, 26, 35 and 36.

Land: rolling and gently rolling.

Soil: gravel and rock, 2nd and 3rd rates.

No timber. Undergrowth: sage, greasewood, cactus.

 N.0°01'W., bet. secs. 25 and 26.

Over general W. slope; through scattering undergrowth.

SUBDIVISIONS OF T.38 N., R.10 W.

Chains	
5.00	Small wash, course NW.
10.00	Small wash, course W.
15.50	Small wash, course W.
21.50	Head of wash, course W.
34.50	Head of wash, course W.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{c} \frac{1}{4} \\ \uparrow \\ S26 S25 \\ \hline 1934 \end{array}$
	and raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
45.50	Draw, course W.
53.50	Draw, course W.
58.50	Begin ascent of 114 ft. over S. slope.
71.50	Change to NW. slope; desc. 110 ft., to cor.
76.50	Point of spur, slopes W.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 23, 24, 25 and 26, with brass cap mkd.
	$\begin{array}{c} T38N R10W \\ \hline S23 S24 \\ \hline S26 S25 \\ \hline 1934 \end{array}$
	and raise a mound of stone, 4 ft. base, 2 ft. high, W. of cor.
	Land: rolling. Soil, sand and gravel, 3rd rate. No timber. Undergrowth: sage and greasewood.

	S.89°57'E., on random line, bet. secs. 24 and 25.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.10	A point 5 lks. S. of the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp., hereinbefore described.
	Thence
	N.89°59'W., on true line, bet. secs. 24 and 25.
	Over gently rolling land; through scattering undergrowth
10.80	Old road, bears NW. and SE.
40.05	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{c} S24 \\ \hline S25 \\ \hline 1934 \end{array}$
	and raise a mound of

SUBDIVISIONS OF T.38 N., R.10 W.

Chains

stone, 4 ft. base, 2 ft. high, N. of cor.

Asc. 102 ft. over steep E. slope.

44.60 Rim of mesa, bears N. and S.; over same.

58.60 Rim of mesa, bears NW. and SE.; desc. 85 ft. over SW. slope.

64.60 Wash, 20 lks. wide, course NW.; asc. 6 ft.

68.10 Spur, slopes NW.; desc. 52 ft. over W. slope.

73.10 Wash, 10 lks. wide, course NW.; asc. 34 ft. over NE. slope.

78.00 Spur, slopes N.; desc. 30 ft. over NW. slope.

80.10 The cor. of secs. 23, 24, 25 and 26.

Land: rolling.

Soil: gravel and rock, 3rd rate.

No timber. Undergrowth: sage.

N.0°01'W., bet. secs. 23 and 24.

Desc. 15 ft. over NW. slope; through scattering undergrowth.

2.10 Draw, course NW.; asc. 30 ft.

6.20 Short spur, slopes W.; desc. 35 ft.

9.50 Wash, 15 lks. wide, course W.; asc. 75 ft.

12.90 Rimrock, bears NW. and SE.; over mesa land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, with a limestone, 8 x 8 x 2 ins., mkd. X, deposited at base, and in a mound of stone to top, for $\frac{1}{2}$ sec. cor., with brass cap mkd.

$\frac{1}{2}$
 S23 | S24
 1934

Desc. 128 ft. over gentle NE. slope.

78.60 Small drain, course E.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground, with a limestone, 8 x 5 x 4 ins., mkd. X, deposited beside, and in a mound of stone to top, for cor. of secs. 13, 14, 23 and 24, with brass cap mkd.

T38N | R10W
 S14 | S13
 S23 | S24
 1934

Land: rolling and mesa.

Soil: rocky, 3rd rate.

No timber. Undergrowth: sage.

SUBDIVISIONS OF T.38 N., R.10 W.

Chains

- S.89°59'E., on random line, bet. secs. 13 and 24.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.14 A point 7 lks. N. of the cor. of secs. 13,18,19 and 24, on the E. bdy. of the Tp., hereinbefore described.
- Thence
- N.89°56'W., on true line, bet. secs. 13 and 24.
- Over top of ridge, bears SW. and NW., through scattering undergrowth.
- 1.10 Leave ridge; desc. 50 ft. over W. slope.
- 7.30 Drain, 10 lks. wide, course SW.; desc. gently.
- 17.80 Wash, 5 lks. wide, course S.
- 24.30 Small wash, course SW.; asc. 65 ft., to cor.
- 32.50 Drain, course SW.
- 40.07 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
- $\frac{1}{4}$ S13
 $\frac{1}{4}$ S24
 1934
- and raise a mound of
stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.
- Desc. 16 ft. over gentle SW. slope.
- 54.60 Draw, course NW.; asc. gently.
- 55.60 Old road, bears NW. and SE.
- 70.70 Old road, bears NW. and SE.
- 75.00 Asc. 30 ft. over E. slope.
- 80.14 The cor. of secs. 13,14,23 and 24.
- Land: rolling and gently rolling.
Soil: gravel and loam, 2nd rate.
No timber. Undergrowth: sage and a few cacti.

N.0°01'W., bet. secs. 13 and 14.

Desc. 64 ft. over gradual NE. slope; through scattering undergrowth.

- 10.00 Old road, bears E. and W.
- 27.50 Drain, old road in bottom, course NW.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
- $\frac{1}{4}$
 S14 | S13
 1934
- and raise a mound of
stone, 4 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.

SUBDIVISIONS OF T.38-N., R.10 W.

BOOK 4007

Chains

Asc. 60 ft. along general W. slope, to cor.

55.00 Small wash, course W.

65.00 Small wash, course W.

72.40 Small wash, course W.

76.50 Small wash, course W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone, 4 ft. base, to top, for cor. of secs. 11,12,13 and 14, with brass cap mkd.

T38N R10W	
S11	S12
S14	S13
1934	

Land: gently rolling.

Soil: gravel, rocky, 3rd rate.

No timber. Undergrowth: sage and a few cacti.

S.89°56'E., on random line, bet. secs. 12 and 13.

40.00 Set temp. sec. cor.

80.06 Intersect the cor. of 7,12,13 and 18, on the E. bdy. of the Tp., hereinbefore described.

Thence

N.89°56'W., on true line, bet. secs. 12 and 13.

Asc. 70 ft. over gradual E. slope; through scattering undergrowth.

21.30 Road, bears N. and S.

40.03 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground, and in a mound of stone to top, for sec. cor., with brass cap mkd.

S12
S13
1934

and raise a mound of stone, 3 ft. base, 25 ft. high, N. of cor.

Asc. 35 ft. over gradual E. slope.

48.50 Change to W. slope; desc. 10 ft.

49.30 Ravine, course N.; asc. 115 ft. over gradual NE. slope.

74.50 Rimrock, faces W.; desc. 175 ft. over same and W. slope.

80.06 The cor. of secs. 11,12,13 and 14.

Land: rolling and mountainous.

Soil, gravel, 3rd rate.

No timber. Undergrowth: sage and a few cacti.

N.89°56'W., bet. secs. 12 and 13.

SUBDIVISIONS OF T.38 N., R.10 W.

Chains

N.0°01'W., bet. secs. 11 and 12.

Asc. 188 ft. over SW. slope; through scattering sagebrush.

16.60 Rimrock, faces SW.; desc. 69 ft. over gradual NE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bedrock, with a stone mkd. X deposited at base, and supported in a mound of stone, 3 ft. base, 2 ft. high, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ \uparrow \\ S11 | S12 \\ \downarrow \\ 1934 \end{array}$$

Desc. 92 ft. over general E. slope, to cor.

67.00 Wash, 20 lks. wide, course N.70°E.

75.20 Small drain, course E.

79.40 Small drain, course E.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground to bedrock, with a stone mkd. X deposited at base, and supported in a mound of stone, 4 ft. base, 2 ft. high, for cor. of secs. 1, 2, 11 and 12, with brass cap mkd.

$$\begin{array}{c} T38N | R10W \\ \hline S2 | S1 \\ \hline S11 | S12 \\ \downarrow \\ 1934 \end{array}$$

Land: rolling and gently rolling.

Soil: gravel, 3rd rate.

No timber. Undergrowth: sage and a few cacti.

S.89°56'E., on random line, bet. secs. 1 and 12.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.06 A point 2 lks. S. of the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp., hereinbefore described.

Thence

N.89°57'W., on true line, bet. secs. 1 and 12.

Over gently rolling land; through scattering sagebrush.

11.00 Small drain, course NE.

28.00 Drain, course NE.

40.03 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\begin{array}{c} S1 \\ \hline \frac{1}{4} \\ \hline S12 \end{array}$$

1934

and raise a mound of stone, $3\frac{1}{2}$ ft. base, 2 ft. high, N. of cor.

Asc. 87 ft. over gradual NE. and E. slopes, to cor.

SUBDIVISIONS OF T.38 N., R.10 W.

Chains

52.80 Wash, 10 lks. wide, course N.20°E.

80.06 The cor. of secs. 1,2,11 and 12.

Land: gently rolling.
Soil: sand and gravel, 2nd rate.
No timber. Undergrowth: sage.

N.0°01'W., on random line, bet. secs. 1 and 2.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.86 A point 2 lks. W. of the cor. of secs. 1,2,35 and 36, on the N. bdy. of the Tp., hereinbefore described.

Thence

South, on true line, bet. secs. 1 and 2.

Desc. 23 ft. over gentle SE. slope; through scattering sagebrush.

6.30 Draw, course NE.; asc. slightly.

9.80 Low spur, slopes NE.; desc. 46 ft.

32.30 Draw, course NE.; asc. 6 ft.

39.86 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
S2 | S1
1934.

and raise a mound of
stone, 3 ft. base, 2 ft. high, W. of cor.

Asc. 30 ft. over general NE. slope.

60.00 Low spur, slopes NE.

63.00 Wash, 10 lks. wide, course NE.

79.86 The cor. of secs. 1,2,11 and 12.

Land: gently rolling.
Soil: sand and gravel, 3rd rate.
No timber. Undergrowth: sage and a few cacti.

Beginning at the cor. of secs. 2,3,34 and 35, on the S. bdy. of the Tp., an iron post, 2 ins. diam., projecting 4 ins. above a mound of stone, firmly set and properly mkd. on brass cap, dated 1932, and witnessed as described in the official record,

N.0°01'W., bet. secs. 34 and 35.

Asc. 26 ft. over SE. slope; through scattering undergrowth.

5.40 Flat spur, slopes E.; desc. 159 ft. over NE. slope.

9.00 Hillside drain, course NE.

16.00 Foot of steep descent; desc. 60 ft. over gentle E. slope.

SUBDIVISIONS OF T.38 N., R.10 W.

Chains

18.50 Road, bears NW. and SE.

30.00 Road, bears E. and W.

35.00 Wash, 30 lks. wide, course E.; asc. gently.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
$$\begin{array}{c} \uparrow \\ \text{S34} \mid \text{S35} \\ \text{1934} \end{array}$$

and raise a mound
of stone, 4 ft. base, 2 ft. high, W. of cor.

Over gently rolling E. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 26, 27, 34 and 35, with brass cap mkd.

$$\begin{array}{c} \text{T38N} \mid \text{R10W} \\ \text{S27} \mid \text{S26} \\ \text{S34} \mid \text{S35} \\ \text{1934} \end{array}$$

and raise a mound of
stone, 4 ft. base, 2 ft. high, W. of cor.

Land: rolling and gently rolling.

Soil: sand and gravel, 2nd and 3rd rates.

No timber. Undergrowth: sage and a few cacti.

East, on random line, bet. secs. 26 and 35.

40.00 Set temp. $\frac{1}{2}$ sec. cor.

79.94 A point 5 lks. N. of the cor. of secs. 25, 26, 35 and 36.

Thence

N.89°58'W., on true line, bet. secs. 26 and 35.

Desc. 46 ft. over W. slope; through scattering sagebrush.

11.00 Road, bears N. and S.; over flat.

20.00 Wash, 100 lks. wide, 1 ft. deep, course N.

22.00 Wash, 200 lks. wide, 1 ft. deep, course N.10°E.

32.00 Old road, bears N. and S.

39.97 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap mkd.
$$\begin{array}{c} \text{S26} \\ \text{S35} \\ \text{1934} \end{array}$$

and raise a mound of
stone, 3 ft. base, 2 ft. high, N. of cor.

59.50 Wire fence, 2-strand, bears N. and S.

73.00 Old road, bears N. and S.

79.94 The cor. of secs. 26, 27, 34 and 35.

SUBDIVISIONS OF T.38 N., R.10 W.

BOOK 4087

Chains

Land: gently rolling.
Soil: silt and sandy loam, 1st and 2nd rates.
Timber: none. Undergrowth: sage and a few cacti.

N.0°01'W., bet. secs. 26 and 27.

Over bottom land, slopes NE.; through scattering undergrowth.

- 3.85 Wash, road in bottom, course NE.
21.80 Road, bears NW. and SE.; small drain, course NE.
27.00 Drain, course NE.; asc. 47 ft. over gentle SW. slope.
27.90 Old road, bears E. and W.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground, with a limestone, 6 x 4 x 3 ins., mkd. X, deposited at base, and supported in a mound of stone, 4 ft. base, 2 ft. high, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
 S27 | S26
 1934

Asc. 44 ft. over general SW. slope.

- 46.50 Spur, slopes SE.; desc. 55 ft. over NE. slope.
63.10 Wash, 10 lks. wide, course SE.; over gently rolling land.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 22, 23, 26 and 27, with brass cap mkd.

T38N R10W
 S22 | S23
 S27 | S26
 1934

and raise a mound of
stone, 4 ft. base, 3 ft. high, W. of cor.

Land: gently rolling.
Soil: loam, sand, gravel, 3rd rate.
No timber. Undergrowth: sage.

S.89°58'E., on random line, bet. secs. 23 and 26.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
79.90 A point 7 lks. S. of the cor. of secs. 23, 24, 25 and 26.
Thence
S.89°59'W., on true line, bet. secs. 23 and 26.
Through scattering undergrowth; asc. slightly.
1.40 Point of small spur, slopes NW.; desc. 46 ft.
11.90 Draw, course SW.; desc. 26 ft.
24.10 Road, bears N. and S.

SUBDIVISIONS OF T.38 N., R.10 W.

Chains

- 32.30 Wash, 50 lks. wide, 15 ft. deep, course N.30°W.
 36.60 Old road, bears NW. and SE.
 39.95 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S23
 S26

1934

and raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Asc. 82 ft. over gentle E. slope, to cor.

- 55.20 Small drain, course NE.
 79.90 The cor. of secs. 22, 23, 26 and 27.

Land: gently rolling.
 Soil: sand and gravel, 2nd rate.
 No timber. Undergrowth: sage.

N.0°01'W., bet. secs. 22 and 23.

Over gently rolling land; through very scattering sage.

- 18.60 Head of draw, course E.
 35.60 Ravine, 20 ft. deep, course NE.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., on cross (X) on exposed bedrock, and with a stone mkd. X deposited at base, supported in a mound of stone, 5 ft. base, 2 $\frac{1}{2}$ ft. high, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S22 | S23
 1934

- 43.40 Draw, course E.
 55.00 Drain, course E.
 62.00 Drain, course E.
 66.30 Wash, course E.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground to bedrock, with a stone mkd. X deposited at base, supported in a mound of stone, 4 ft. base, 2 $\frac{1}{2}$ ft. high, for cor. of secs. 14, 15, 22 and 23, with brass cap mkd.

T38N | R10W
 S15 | S14
 S22 | S23
 1934

Land: rolling and broken.
 Soil: sand and gravel, 3rd rate.
 No timber. Undergrowth: sage.

N.89°59'E., on random line, bet. secs. 14 and 23.

SUBDIVISIONS OF T.38 N., R.10 W.

27

BOOK 4037

Chains

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 79.96 A point 12 lks. S. of the cor. of secs. 13,14,23 and 24.
- Thence
- 3.89°54'W., on true line, bet. secs. 14 and 23.
- Through very scattering undergrowth; asc. slightly.
- 5.00 Road, bears N. and S.
- 11.00 Low ridge, bears N. and S.; desc. 46 ft.
- 15.00 Road, bears NE. and SW.
- 20.00 Old road, bears N. and S.
- 20.50 Old wire fence, bears N. and S.
- 30.00 Old road, bears N. and S.; over flat.
- 37.00 Wash, 100 lks. wide, course N.; over washed area.
- 39.98 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{S14}{S23}$
1934

and raise a mound of
stone, $3\frac{1}{2}$ ft. base, $2\frac{1}{2}$ ft. high, N. of cor.

- 50.30 Wash, course N.20°W.; leave washed area.
- 55.00 Low spur, slopes NE.; desc. 21 ft.
- 58.00 Draw, course NE.; asc. 30 ft. over SE. slope.
- 64.50 Wire fence, bears N. and S.; desc. 18 ft. over NW. slope.
- 70.60 Draw, course NE.; asc. 23 ft.
- 73.00 Over gentle E. slope.
- 79.96 The cor. of secs. 14,15,22 and 23.

Land: gently rolling.
Soil: rocky, 3rd rate.
No timber. Undergrowth: sage.

N.0°01'W., bet. secs. 14 and 15.

Desc. 20 ft. over gentle NE. slope; through very scattering undergrowth.

- 6.10 Drain, course E.
- 8.70 Drain, course S.60°E.; asc. 16 ft.
- 12.00 Low spur, slopes S.60°E.; desc. gently.
- 25.00 Drain, course N.75°E.
- 30.00 Drain, course S.60°E.
- 32.70 Low spur, slopes E.

SUBDIVISIONS OF T.38 N., R.10 W.

Chains 40.00	<p>Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.</p> <div style="text-align: center;"> $\frac{1}{4}$ S15 S14 1934 </div> <p style="text-align: right;">and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.</p>
40.10	Small drain, course N.15°E.
46.90	Small drain, course E.
54.00	Low divide, bears E. and NW.; desc. gently.
80.00	<p>Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground, with a stone mkd. X deposited beside, and in a mound of stone to top, for cor. of secs. 10, 11, 14 and 15, with brass cap mkd.</p> <div style="text-align: center;"> T38N R10W S10 S11 S15 S14 1934 </div> <p>Land: gently rolling. Soil: gravel loam, 2nd and 3rd rates. No timber. Undergrowth: sage.</p> <hr style="border-top: 1px dashed black;"/> <p>N.89°54'E., on random line, bet. secs. 11 and 14.</p>
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.88	<p>A point 2 lks. S. of the cor. of secs. 11, 12, 13 and 14.</p> <p>Thence</p> <p>S.89°53'W., on true line, bet. secs. 11 and 14.</p> <p>Desc. 45 ft. over flattening W. slope; through very scattering sage brush.</p>
17.00	Over gently rolling land.
19.10	Dim road, bears N. and S.
26.00	Reservoir, dry, about 2 chs. diam., bears 2 chs. S.
36.00	Large wash, 2.50 chs. wide, 25 ft. deep, course N.10°W.
37.60	Mouth of wash, from SW.
39.94	<p>Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.</p> <div style="text-align: center;"> $\frac{1}{4}$ S11 S14 1934 </div> <p style="text-align: right;">and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.</p> <p>Asc. 35 ft. over general NE. slope, to cor.</p>
68.40	Drain, course NE.

SUBDIVISIONS OF T.38 N., R.10 W.

BOOK 4037

Chains

79.40 Dim road, bears NW. and SE.

79.88 The cor. of secs. 10,11,14 and 15.

Land: gently rolling.

Soil: gravel and loam, 2nd and 3rd rates.

No timber. Undergrowth: sage.

N.0°01'W., bet. secs. 10 and 11.

Over gently rolling land; through scattering sage brush.

0.25 Old road, bears NW. and SE.

12.80 Wash, 20 lks. wide, 5 ft. deep, course N.70°E.

22.90 Draw, course NE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S10	S11
1934	

and raise a mound
of stone, 3 ft. base, 2 ft. high, W. of cor.

48.30 Wash, 10 lks. wide, course NE.

52.00 Old road, bears NE. and SW.

68.00 Wash, 10 lks. wide, course NW.

74.50 Wash, 10 lks. wide, course NE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 2,3,10 and 11, with brass cap mkd.

T38N R10W	
S 3	S 2
S10	S11
1934	

and raise a mound
of stone, 3 ft. base, 2 ft. high, W. of cor.

Land: gently rolling.

Soil: gravel and sand, 3rd rate.

No timber. Undergrowth: sage.

N.89°53'E., on random line, bet. secs. 2 and 11.40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.94 A point 12 lks. N. of the cor. of secs. 1,2,11 and 12.

Thence

S.89°58'W., on true line, bet. secs. 2 and 11.

Asc. 56 ft. over NE.slope; through scattering sage brush.

15.00 Ravine, course NE.; continue ascent 34 ft.

SUBDIVISIONS OF T.38 N., R.10 W.

Chains	
24.00	Ridge, bears N.10°W. and S.10°E.; rimrock, faces W.; desc. 122 ft. over same and W. slope.
31.20	Wash, 10 lks. wide, 5 ft. deep, course SW.; desc. 46 ft. over SW. slope.
39.97	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4}$ S2 $\frac{1}{4}$ S11 1934
	and raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
	Desc. 20 ft. over gradual W. slope.
43.60	Road, bears NW. and SE.
48.00	Large wash, 100 lks. wide, 10 ft. deep, course N.; asc. 17 ft. over E. slope.
61.90	Old road, bears N. and S.; change to NW. slope, desc. 9 ft.
74.90	Wash, 5 lks. wide, course NE.; asc. 17 ft.
79.94	The cor. of secs. 2,3,10 and 11.
	Land: rolling. Soil: sand and gravel, 3rd rate. No timber. Undergrowth: sage.

	North, on random line, bet. secs. 2 and 3.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.93	A point 2 lks. W. of the cor. of secs. 2,3,34 and 35, on the N. bdy. of the Tp., hereinbefore described.
	Thence
	S.0°01'W., on true line, bet. secs. 2 and 3.
	Over gently rolling land; through scattering sage brush.
18.60	Wash, 10 lks. wide, course NE.
32.00	Draw, 10 lks. wide, 3 ft. deep, course NE.
36.80	Road. bears NE. and SW.
39.93	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4}$ S3 S2 1934
	and raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.
44.20	Road, bears NE. and SW.
73.70	Draw, course NE.
79.93	The cor. of secs. 2,3,10 and 11.

SUBDIVISIONS OF T.38 N., R.10 W.

4087

Chains

Land: gently rolling.
Soil: sand and gravel, 3rd rate.
No timber. Undergrowth: sage.

Beginning at the cor. of secs. 3,4,33 and 34, on the S. bdy. of the Tp., an iron post, 2 ins. diam., projecting 3 ins. above a mound of stone, firmly set and properly mkd. on brass cap, dated 1932, and witnessed as described in the official record.

N.0°02'W., bet. secs. 33 and 34.

Asc. 92 ft. over steep S. slope; through scattering sage.

- 2.90 Rim, turns from W. to N.; asc. 70 ft. along top of rim on E. slope.
- 12.90 Leave rim, bears S. and NE.; over rolling mesa.
- 30.90 Broken rim, bears SE. and NW.; desc. 155 ft. over same and NE. slope.
- 35.30 Ravine, course E.; asc. 113 ft. over SE. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, with a stone, 4 x 4 x 2 ins., mkd. X, deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec.cor., with brass cap mkd.

$\frac{1}{4}$
 |
 S33 | S34
 |
 1934

Asc. 23 ft. over SE. slope.

- 41.10 Low rim, bears SW. and NE.; desc. slightly.
- 42.50 Drain, course SE.; asc. 52 ft. over S. slope.
- 54.00 Change to gently rolling W. slope.
- 64.00 Small drain, course SW.
- 68.00 Change to gentle S. slope; asc. 28 ft.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., on cross (X) on exposed bedrock, and in a mound of stone to top, for cor. of secs. 27,28,33 and 34, with brass cap mkd.

T38N R10W
 S28 | S27

 S33 | S34
 1934

Land: gently rolling to mountainous.
Soil: rocky clay loam, 3rd and 4th rates.
No timber. Undergrowth: sage.

East, on random line, bet. secs. 27 and 34.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 79.96 A point 9 lks. S. of the cor. of secs. 26,27,34 and 35.

SUBDIVISIONS OF T.38 N., R.10 W.

Chains	
	Thence
	S.89°56'W., on true line, bet. secs. 27 and 34.
	Over gently rolling land; through scattering sage brush.
3.40	Small wash, old road in bottom, course NE.
16.90	Small wash, course NE.; asc. 43 ft. over gentle NE. slope.
26.20	Road, bears SE. and NW.
37.10	Road, bears SE. and NW.
39.98	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{r} \frac{1}{4}S27 \\ \frac{1}{4}S34 \\ \hline 1934 \end{array}$
	and raise a mound of
	stone, $3\frac{1}{2}$ ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.
	Asc. 288 ft. over general NE. slope, to cor.
48.20	Old road, bears SE. and NW.
55.30	Point of spur, slopes NE.
57.70	Head of drain, course NE.
66.70	Small spur, slopes NE.
68.70	Drain, course NE.
76.20	Rim rock, bears NE. and SW.; asc. gently.
79.96	The cor. of secs. 27, 28, 33 and 34.
	Land: rolling.
	Soil: sand and loam, 2nd and 3rd rates.
	No timber. Undergrowth: sage.

	N.0°02'W., bet. secs. 27 and 28.
	Over mesa, slopes NE.; through very scattering sagebrush.
8.60	Rimrock, bears N.10°W. and S.30°E.; desc. 238 ft. over steep N.70°E. slope.
20.40	Change to gentler N. slope; desc. 137 ft.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{r} \frac{1}{4} \\ S28 \quad \quad S27 \\ \hline 1934 \end{array}$
	and raise a mound of
	stone, 3 ft. base, 2 ft. high, W. of cor.
	Over gentle N. slope.
41.70	Road, bears NW. and SE.
51.50	Old road, bears E. and W.

SUBDIVISIONS OF T.38 N., R.10 W.

FOCK 4007

Chains

60.00 Old road, bears NE. and SW.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 21,22,27 and 28, with brass cap mkd.

T38N	R10W
S21	S22
S28	S27
1934	

and raise a mound of
stone, 4 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.

Land: rolling and gently rolling.
 Soil: sand and gravel, 3rd and 4th rates.
 No timber. Undergrowth: sage.

N.89°56'E., on random line, bet. secs. 22 and 27.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.80 A point 9 lks. N. of the cor. of secs. 22,23,26 and 27.

Thence

West, on true line, bet. secs. 22 and 27.

Asc. 60 ft. over gentle E. slope; through scattering sage.

36.00 Old road, bears NW. and SE.

39.90 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, with a stone, mkd. X, deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S22
S27
1934

42.00 Rim rock, bears NW. and SE.; desc. 68 ft. over SW. slope.

50.00 Foot of slope; over valley land.

50.50 Road, bears NW. and SE.

70.80 Road, bears NW. and SE.

79.80 The cor. of secs. 21,22,27 and 28.

Land: gently rolling.
 Soil: sand and gravel, 3rd rate.
 No timber. Undergrowth: sage.

N.0°02'W., bet. secs. 21 and 22.

Over gentle NW. slope; through scattering sage brush.

20.70 Road, bears NW. and SE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

SUBDIVISIONS OF T.38 N., R.10 W.

Chains

$$\begin{array}{c} \frac{1}{4} \\ \hline S21 | S22 \\ \hline 1934 \end{array}$$

and raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

45.00 Road, bears NW. and SE.

45.30 Wash, 20 lks. wide, course NW.; asc. 117 ft. over increasing SW. slope.

64.90 Rimrock, bears NW. and SE.; over mesa land.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground, with a limestone, 6 x 5 x 4 ins., mkd. X, deposited at base, and in a mound of stone to top, for cor. of secs. 15, 16, 21 and 22, with brass cap mkd.

$$\begin{array}{c} T38N R10W \\ \hline S16 | S15 \\ \hline S21 | S22 \\ \hline 1934 \end{array}$$

Land: gently rolling and rolling.
Soil: rocky, sand and gravel, 3rd rate.
No timber. Undergrowth: sage.

East, on random line, bet. secs. 15 and 22.

40.00 Set temp. $\frac{1}{2}$ sec. cor.

79.78 A point 7 lks. S. of the cor. of secs. 14, 15, 22 and 23.

Thence

S. 89° 57' W., on true line, bet. secs. 15 and 22.

Asc. 103 ft. over general NE. slope, to cor.; through scattering sage brush.

18.60 Head of drain, course NE.

30.60 Head of gulch, course NE.

39.89 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
$$\begin{array}{c} S15 \\ \hline S22 \\ \hline 1934 \end{array}$$

and raise a mound of stone, 2 ft. base, 2 ft. high, N. of cor.

45.50 Gulch, 25 ft. deep, course NE.; asc. 75 ft. over mesa, slopes E. and NE.

56.10 Head of drain, course NE.

65.30 Drain, course NE.

77.30 Road, bears N. and S.

79.78 The cor. of secs. 15, 16, 21 and 22.

SUBDIVISIONS OF T.38 N., R.10 W.

BOOK 4037

Chains

Land: gently rolling and rolling.
Soil: gravel and loam, 2nd and 3rd rates.
No timber. Undergrowth: sage.

N.0°02'W., bet. secs. 15 and 16.

Over gently rolling land; through scattering sage brush.

- 1.00 Old road, bears NW. and SE.
16.00 Old road, bears NE. and SW.
35.00 Shallow draw, course W.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap mkd.

S16 | S15

1934

and raise a mound of
stone, 3 ft. base, 2 ft. high, W. of cor.

- 60.00 Ravine, 20 ft. deep, course NE.; over gentle SE. slope.
70.00 Change to steeper W. slope; desc. 20 ft.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 9,10,15 and 16, with brass cap mkd.

T38N R10W
S 9 | S10

S16 | S15

1934

and raise a mound of
stone, 4 ft. base, 2 ft. high, W. of cor.

Land: gently rolling and rolling.
Soil: gravel, rocky, 3rd rate.
No timber. Undergrowth: sage.

N.89°57'E., on random line, bet. secs. 10 and 15.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
79.74 A point 7 lks. N. of the cor. of secs. 10,11,14 and 15.

Thence

West, on true line, bet. secs. 10 and 15.

Over gently rolling land; through scattering sage brush.

- 7.70 Small draw, course NE.; asc. 66 ft. over general NE. slope, to $\frac{1}{2}$ sec. cor.
37.20 Drain, course N.
39.87 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, with a stone, mkd. X, deposited at base, and in a mound of stone to top, for $\frac{1}{2}$ sec. cor., with brass cap mkd.

SUBDIVISIONS OF T.38 N., R.10 W.

Chains	
	$\begin{array}{r} S10 \\ \hline S15 \\ 1934 \end{array}$
	Asc. 81 ft. over rolling E. slope.
68.00	Rimrock, bears N. and S., faces W.; desc. 30 ft. over same.
71.20	Ravine, course N.; asc. 52 ft. over rocky E. slope.
74.90	Over flat ridge, bears N. and S.
78.70	Leave same; desc. 8 ft. over W. slope.
79.74	The cor. of secs. 9,10,15 and 16.
	Land: rolling and gently rolling. Soil: gravel and sand, 3rd rate. No timber. Undergrowth: sage.

	N.0°02'W., bet. secs. 9 and 10.
	Desc. 7 ft. along W. slope; through scattering sage brush.
2.80	Spur, slopes W.; desc. 114 ft. over N. slope.
11.20	Road, bears E. and W.
12.10	Wash, 10 lks. wide, course W.; asc. 43 ft. over S. slope.
20.20	Spur, slopes SE.; desc. 17 ft. over NE. slope.
25.00	Draw, course SE.; asc. 54 ft. over SE. slope.
33.60	Spur, slopes NE.; over gently rolling land.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap mkd.
	$\begin{array}{r} \frac{1}{2} \\ \uparrow \\ S9 S10 \\ \hline 1934 \end{array}$
	and raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
48.50	Low spur, slopes NE.; desc. 17 ft.
55.00	Draw, course E.; asc. 23 ft. over SE. slope.
66.70	Spur, slopes NE.; desc. 34 ft. over NW. slope.
73.50	Draw, course E.; asc. 36 ft. over SE. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 3,4,9 and 10, with brass cap mkd.
	$\begin{array}{r} T38N R10W \\ S4 S3 \\ \hline S9 S10 \\ \hline 1934 \end{array}$
	and raise a mound of stone, 4 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.

SUBDIVISIONS OF T.38 N., R.10 W.

BOOK 4087

Chains

Land: rolling.
Soil: gravel, rocky, 3rd rate.
No timber. Undergrowth: sage.

East, on random line, bet. secs. 3 and 10.

40.00 Set temp. $\frac{1}{2}$ sec. cor.

79.70 Intersect the cor. of secs. 2,3,10 and 11.

Thence

West, on true line, bet. secs. 3 and 10.

Over gently rolling land; through scattering sage brush.

35.40 Road, bears N. and S.

39.85 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap mkd.

S3

S10
1934

and raise a mound of
stone, 4 ft. base, 2 ft. high, N. of cor.

Over gradual W. slope.

43.20 Change to rolling E. slope; asc. 75 ft.

79.70 The cor. of secs. 3,4,9 and 10.

Land: gently rolling.
Soil: loam, sand, gravel, 2nd rate.
No timber. Undergrowth: sage.

N.0°01'E., on random line, bet. secs. 3 and 4.

40.00 Set temp. $\frac{1}{2}$ sec. cor.

79.89 A point 28 lks. E. of the cor. of secs. 3,4,33 and 34, on the N. bdy. of the Tp., hereinbefore described.

Thence

S.0°11'E., on true line, bet. secs. 3 and 4.

Over gently rolling land; through scattering sage brush.

4.40 Drain, course N.60°E.

14.80 Drain, course NE.

33.70 Drain, course S.70°E.

39.89 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap mkd.

S4 | S3

1934

and raise a mound of
stone, 3 ft. base, 2 ft. high, W. of cor.

SUBDIVISIONS OF T.38 N., R.10 W.

Chains

Asc. 80 ft. over general NE. slope, to cor.

48.30 Drain, course NE.

48.80 Dim road, bears SE. and NW.

69.20 Draw, 80 lks. wide, 10 ft. deep, course NE.

75.70 Drain, course NE.

79.89 The cor. of secs. 3,4,9 and 10.

Land: gently rolling.
Soil: gravel loam, 2nd rate.
No timber. Undergrowth: sage.

From the cor. of secs. 4,5,32 and 33, on the S. bdy. of the Tp., which is an iron post, 2 ins. diam., projecting 4 ins. above a mound of stone, firmly set, properly mkd. on brass cap, unwitnessed.

N.0°03'W., bet. secs. 32 and 33.

Over gently rolling land; through scattering sage brush.

6.50 Draw, course E.

18.00 Old road, bears E. and W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap mkd.

1
S32 | S33
1934

and raise a mound
of stone, 3 ft. base, 2 ft. high, W. of cor.

Over mesa land, slopes S.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 28,29,32 and 33, with brass cap mkd.

T38N R10W
S29 | S28
S32 | S33
1934

and raise a mound
of stone, 4 ft. base, 2 ft. high, W. of cor.

Land: gently rolling.
Soil: sand and gravel, 3rd rate.
No timber. Undergrowth: sage and a few cacti.

East, on random line, bet. secs. 28 and 33.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.08 Intersect the cor. of secs. 27,28,33 and 34.

Thence

West, on true line, bet. secs. 28 and 33.

SUBDIVISIONS OF T.38 N., R.10 W.

BOOK 4037

Chains	
	Over mesa through scattering sage.
5.40	Rim rock, faces W.; desc. 236 ft. over steep W. slope.
8.00	Foot of steep descent; continue descent 99 ft. over W. slope.
28.70	Draw, course N.
34.10	Wash, course N.; asc. 49 ft. over E. slope.
40.04	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{r} \frac{1}{4} 328 \\ \frac{1}{4} 333 \\ \hline 1934 \end{array}$
	and raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
	Asc. 158 ft. over increasing E. slope.
45.80	Rim rock, faces E.; over rolling mesa.
48.30	Drain, course NE.; asc. 51 ft. over gradual NE. slope.
65.00	Top of ascent; over gentle N. slope.
80.08	The cor. of secs. 28, 29, 32 and 33.
	Land: rolling to mountainous. Soil: sand and gravel, 2nd and 3rd rates. No timber. Undergrowth: sage.

	N.0°03'W., bet. secs. 28 and 29.
	Over gentle N. slope on mesa; through scattering sage brush.
1.90	Rim rock, bears E. and SW.; desc. 240 ft. over same and N. slope.
16.30	Wash, 50 lks. wide, course E.; asc. 225 ft. over S. and SW. slopes.
16.40	Dim road bears E. and SW.
29.00	Spur, slopes SW.
34.00	Rim rock, faces S.; over rolling top of mesa.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{r} \frac{1}{4} \\ \hline 329 \quad \quad 328 \\ \hline 1934 \end{array}$
	and raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 20, 21, 28 and 29, with brass cap mkd.
	$\begin{array}{r} T38N R10W \\ \hline 320 \quad \quad 321 \\ \hline 329 \quad \quad 328 \\ \hline 1934 \end{array}$
	and raise a mound of

SUBDIVISIONS OF T.38 N., R.10 W.

Chains	
	stone, 3 ft. base, 2 ft. high, W. of cor. Land: gently rolling to mountainous. Soil: gravel and loam, rocky, 2nd and 3rd rates. No timber. Undergrowth: sage.

	East, on random line, bet. secs. 21 and 28.
40.00	Set temp. $\frac{1}{2}$ sec. cor.
79.80	A point 2 lks. N. of the cor. of secs. 21, 22, 27 and 28.
	Thence
	N. 89° 59' W., on true line, bet. secs. 21 and 28.
	Over gently rolling land; through scattering sage brush.
6.30	Road, bears NE. and SW.
18.90	Wash, course N.; asc. 70 ft. over E. slope.
21.20	Dim road, bears SE. and NW.
37.80	Short spur, slopes N.; desc. 25 ft. over NW. slope.
39.80	(10 lks. S. 89° 59' E. of true point) Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for witness cor. to $\frac{1}{2}$ sec. cor., with brass cap mkd.
	$\begin{array}{r} \text{S21} \\ \text{WC } \frac{1}{4} \text{ } \hline \text{S28} \end{array}$
	1934
	and raise a mound of
	stone, 3 ft. base, 2 ft. high, N. of cor.
39.90	True point for $\frac{1}{2}$ sec. cor. falls in wash, 15 lks. wide, course NE.
	Asc. 226 ft. over broken SE. slope.
63.30	Rim rock, bears N. 30° E. and S. 30° W.; over rolling mesa.
79.80	The cor. of secs. 20, 21, 28 and 29.
	Land: rolling. Soil: E. $\frac{1}{2}$ loam, 1st rate; W. $\frac{1}{2}$ gravel, 3rd rate. No timber. Undergrowth: sage.

	N. 0° 03' W., bet. secs. 20 and 21.
	Over gently rolling mesa; through scattering sage brush.
22.50	Rim of mesa, bears NW. and SE.; desc. 162 ft. over N. slope.
30.00	Change to gentle NW. slope; desc. 57 ft.
40.00	True point for $\frac{1}{2}$ sec. cor. falls in wash, 10 lks. wide, 3 ft. deep, course N. 10° E.
41.70	(1.70 chs. N. 0° 03' W.) Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for witness cor. to $\frac{1}{2}$ sec. cor. with brass cap mkd.

SUBDIVISIONS OF T.38 N., R.10 W.

41

BOOK 4087

Chains

S20	S21
W	C
1934	

and raise a mound of
stone, 3 ft. base, 2 ft. high, W. of cor.

Over broken E. slope.

- 59.50 Same wash, 20 lks. wide, course NW.; asc. 71 ft. over SW. slope.
- 62.40 Spur, slopes W.; desc. 80 ft. over NW. slope.
- 64.40 Same wash, course NE.; asc. 108 ft. over SE. slope.
- 70.40 Spur, slopes NE.; desc. 160 ft. over N. slope.
- 72.70 Wash, 20 lks. wide, course E.; asc. 112 ft. over SE. slope.
- 76.00 Rocky spur, slopes SE.; desc. 36 ft. over NE. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 16, 17, 20 and 21, with brass cap mkd.

T38N	R10W
317	316
S20	S21
1934	

and raise a mound of
stone, 4 ft. base, 2 ft. high, W. of cor.

Land: rolling and broken.
Soil: gravel, rocky, 3rd and 4th rates.
No timber. Undergrowth: sage.

- 3.89°59'E., on random line, bet. secs. 16 and 21.
- 40.00 Set temp. $\frac{1}{2}$ sec. cor.
- 79.76 A point 2 lks. N. of the cor. of secs. 15, 16, 21 and 22.
- Thence
- N.89°58'W., on true line, bet. secs. 16 and 21.
- Desc. 35 ft. over gentle SW. slope; through scattering sage brush.
- 7.50 Rim rock, bears NW. and SE.; desc. 88 ft. over same and SW. slope.
- 14.00 Change to gentle W. slope; desc. 17 ft.
- 20.70 Drain, old road in bottom, course NW.; over gentle NW. slope.
- 24.00 Main road, bears N. and S.
- 26.00 Old road, bears NE. and SW.; mouth of entrance to underground lake bears about 25 chs. N.
- 39.88 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for a sec. cor., with brass cap mkd.

SUBDIVISIONS OF T.38 N., R.10 W.

Chains	
	$\begin{array}{r} .316 \\ \hline .321 \\ 1934 \end{array}$ <p style="text-align: right;">and raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.</p>
76.00	Wash, 30 lks. wide, course NE.; asc. 52 ft. over NE. slope.
79.76	The cor. of secs. 16, 17, 20 and 21.
	<p>Land: gently rolling and rolling. Soil: sandy loam, 1st and 2nd rates. No timber. Undergrowth: sage.</p> <p>-----</p>
	N.0°03'W., bet. secs. 16 and 17.
	Desc. 91 ft. over NE. slope; through scattering sagebrush.
3.80	Foot of hill, bears SE. and NW.; over rolling valley land.
17.70	Dim road, bears NW. and SE.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{c} \uparrow \\ \hline \begin{array}{ c c } \hline s17 & s16 \\ \hline \end{array} \\ \hline 1934 \end{array}$ <p style="text-align: right;">and raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p>
54.80	Dim road, bears N.60°W. and S.60°E.
62.70	Road, bears NW. to Hurricane and SE. to Mt. Trumbull.
77.00	Drain, course NE.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 8, 9, 16 and 17, with brass cap mkd.
	$\begin{array}{c} T38N, R10W \\ \hline \begin{array}{ c c } \hline s8 & s9 \\ \hline \end{array} \\ \hline \begin{array}{ c c } \hline s17 & s16 \\ \hline \end{array} \\ \hline 1934 \end{array}$ <p style="text-align: right;">and raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <p>Land: gently rolling. Soil: sand and gravel, 1st rate. No timber. Undergrowth: sage.</p> <p>-----</p>
	S.89°58'E., on random line, bet. secs. 9 and 16.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.82	A point 7 lks. N. of the cor. of secs. 9, 10, 15 and 16.
	Thence
	N.89°55'W., on true line, bet. secs. 9 and 16.
	Desc. 73 ft. over W. slope; through scattering sage brush.

SUBDIVISIONS OF T.38 N., R.10 W.

43

BOOK 4037

Chains

- 5.50 Drain, course N.30°W.; asc. 30 ft.
- 11.30 Spur, slopes N.; desc. 40 ft. over W. slope.
- 14.90 Road from S. forks to N. and NE.
- 15.20 Drain, course N.15°E.; over gentle E. slope.
- 39.91 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap mkd.
- $$\begin{array}{r} .59 \\ \hline 4816 \\ 1934 \end{array}$$
- and raise a mound of
stone, 3 ft. base, 2 ft. high, N. of cor.
- 65.00 Low range of hills, bear N. and S.
- 76.50 Drain, course NE.; asc. 30 ft. over E. slope.
- 79.82 The cor. of secs. 8,9,16 and 17.
- Land: gently rolling.
Soil, sandy, gravelly, clay loam, 1st and 3rd rates.
No timber. Undergrowth: sage.
-
- N.0°03'W., bet. secs. 8 and 9.
- Desc. 22 ft. over gentle NE. slope; through scattering
sage brush.
- 12.80 Small drain, course NE.; asc. 16 ft.
- 18.50 Low spur, slopes NE.; desc. 33 ft.
- 25.40 Small drain, dim road in bottom, course N.70°E.; asc. 16 ft.
- 33.50 Low spur, slopes NE.; desc. 11 ft.
- 39.00 Small drain, course NE.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap mkd.
- $$\begin{array}{r} \dagger \\ 88 \mid 89 \\ \hline 1934 \end{array}$$
- and raise a mound of
stone, 3 ft. base, 2 ft. high, W. of cor.
- Over gently rolling land.
- 55.80 Small drain, course NE.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 4,5,8 and 9, with brass cap mkd.
- $$\begin{array}{r} T38N R10W \\ 85 \mid 84 \\ \hline 88 \mid 89 \\ \hline 1934 \end{array}$$
- and raise a mound of
stone, $3\frac{1}{2}$ ft. base, $2\frac{1}{2}$ ft. high, W. of cor.

Chains	<p>Land: gently rolling. Soil: gravel and loam, 2nd rate. No timber. Undergrowth: sage and Mormon tea.</p> <hr/> <p>S.89°55'E., on random line, bet. secs. 4 and 9.</p> <p>40.00 Set temp. $\frac{1}{4}$ sec. cor.</p> <p>79.90 Intersect the cor. of secs. 3,4,9 and 10.</p> <p>Thence</p> <p>N.89°55'W., on true line, bet. secs. 4 and 9.</p> <p>Asc. 70 ft. over general NE. slope; through scattering sage brush.</p> <p>13.20 Drain, 10 ft. deep, course NE.</p> <p>21.90 Low range of hills, bear N. and S.; desc. 105 ft. over general W. slope.</p> <p>38.30 Wash, 10 lks. wide, course N.</p> <p>39.00 Road, bears N. and S.</p> <p>39.95 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.</p> <p style="text-align: center;"> $\frac{184}{489}$ 1934 </p> <p style="text-align: right;">and raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.</p> <p>Over gently rolling land.</p> <p>51.40 Draw, course NE.</p> <p>61.60 Road, bears N.30°E. and S.30°W.</p> <p>66.10 Small drain, course NE.</p> <p>79.90 The cor. of secs. 4,5,8 and 9.</p> <p>Land: gently rolling. Soil: gravel and loam, 2nd rate. No timber. Undergrowth: sage.</p> <hr/> <p>N.0°11'W., on random line, bet. secs. 4 and 5.</p> <p>40.00 Set temp. $\frac{1}{4}$ sec. cor.</p> <p>79.86 A point 7 lks. E. of the cor. of secs. 4,5,32 and 33, on the N. bdy. of the Tp., hereinbefore described.</p> <p>Thence</p> <p>S.0°14'E., bet. secs. 4 and 5.</p> <p>Over gently rolling land; through scattering sagebrush.</p> <p>2.30 Drain, course NE.</p> <p>10.00 Begin descent of 95 ft. over S. slope.</p>
--------	--

SUBDIVISIONS OF T.38 N., R.10 W.

BOOK 4037

Chains	
22.50	Dim road, bears E. and W.
31.25	Road, bears N.60°W. and S.60°E.
38.20	Swale, drains E.
39.86	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd. <div style="text-align: center;"> $\frac{1}{4}$ S5 S4 1934 </div> and raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Over gentle NE. slope.
79.86	The cor. of secs. 4, 5, 8 and 9. Land: gently rolling. Soil: sandy loam, gravel, 2nd rate. No timber. Undergrowth: sage.

	From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., an iron post, 2 ins. diam., projecting 4 ins. above a mound of stone, firmly set, properly mkd. on brass cap, dated 1932, and witnessed as described in the official record. N.0°03'W., bet. secs. 31 and 32. Over gentle SE. slope; through scattering sage brush.
2.50	Spur, old road on top, slopes NE.; desc. 50 ft. over gentle N. slope.
26.50	Rocky rim, bears SE. and W.; desc. 90 ft. over N. slope.
36.00	Wash, 10 lks. wide, course NE.; asc. 10 ft.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd. <div style="text-align: center;"> $\frac{1}{4}$ S31 S32 1934 </div> and raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high, W. of cor. Asc. 35 ft. over steep S. slope.
42.00	Spur, slopes NE.; desc. 57 ft. over rocky NW. slope.
51.00	Drain, 10 lks. wide, course NE.; asc. 44 ft. over S. slope.
53.60	Rimrock, bears E. and W.; over E. slope.
58.90	Gulch, 50 ft. deep, 3 chs. wide, course E.
68.30	Rocky spur, slopes E.; desc. 74 ft. over N. slope.
70.10	Dim road, bears NW. and SE.
71.00	Gulch, 20 lks. wide, 6 ft. deep, course S.60°E.; asc. 60 ft. over SE. slope.

SUBDIVISIONS OF T.38 N., R.10 W.

Chains

80.00 Set an iron post, 3 ft. long, 2 ins. diam., on cross (X) on exposed bedrock, and in a mound of stone to top, for cor. of secs. 29,30,31 and 32, with brass cap mkd.

T38N	R10W
S30	S29
S31	S32
1934	

Land: rolling and broken.
Soil: sand and gravel loam, 2nd and 3rd rates.
No timber. Undergrowth: sage.

East, on random line, bet. secs. 29 and 32.

40.00 Set temp. 1 sec. cor.

79.78 A point 5 lks. N. of the cor. of secs. 28,29,32 and 33.

Thence

N.89°58'W., on true line, bet. secs. 29 and 32.

Over mesa; through scattering sage.

1.00 Rim rock, bears NE. and SW.; desc. 188 ft. over NW. slope.

21.10 Wash, 15 lks. wide, course NE.; over valley land.

24.00 Road, bears NE. and SW.

30.00 Begin ascent of 109 ft. over NE. slope.

39.89 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/2 sec. cor., with brass cap mkd.

S29
S32
1934

and raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Asc. 85 ft. over general E. slope.

45.40 Top of ascent; over rolling mesa.

59.60 Head of ravine, course S.

65.00 Change to W. slope; desc. 50 ft.

66.50 Drain, 10 lks. wide, course S.; asc. 50 ft. over NE. slope.

74.80 Spur, slopes S.; desc. 70 ft. over SW. slope.

77.60 Draw, course S.; asc. 30 ft. over SE. slope.

79.78 The cor. of secs. 29,30,31 and 32.

Land: rolling.
Soil: rocky, 3rd and 4th rates.
No timber. Undergrowth: sage.

SUBDIVISIONS OF T.38 N., R.10 W.

47
BOOK 4037

Chains	
	West, on random line, bet. secs. 30 and 31.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.62	A point 27 lks. N. of the cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., hereinbefore described.
	Thence
	N.89°48'E., on true line, bet. secs. 30 and 31.
	Over mesa; through scattering undergrowth.
4.50	Leave mesa; desc. 100 ft. over NE. slope.
14.10	Drain, course NE.; asc. 30 ft.
16.10	Small knoll, on line; desc. 50 ft. over NE. slope.
19.60	Draw, course SE.
22.70	Draw, course S.; asc. 50 ft.
26.50	Rocky point, projects S.; desc. 35 ft.
39.30	Draw, course S.
39.62	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{r} 1330 \\ 1331 \\ \hline 1934 \end{array}$
	and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
	Asc. 70 ft. over SW. slope.
44.00	Point of rim, bears NW. and NE.; desc. 135 ft. over SW. slope.
51.40	Draw, course SE.; asc. 105 ft. over SW. slope.
56.60	Rocky spur, slopes SE.; desc. 10 ft.
57.90	Rim, bears NW. and SE.; desc. 140 ft. over NE. slope.
62.10	Draw, course SE.; asc. 25 ft. along S. slope.
72.30	Low spur, slopes S.; desc. 25 ft.
74.00	Draw, course S.; asc. 70 ft.
77.60	Point of mesa, projects S.; desc. 30 ft. over SE. slope.
79.62	The cor. of secs. 29, 30, 31 and 32.
	Land: rolling and broken. Soil: sand and clay loam, 3rd rate. No timber. Undergrowth: sage and Mormon tea.

	N.0°03'W., bet. secs. 29 and 30.
	Asc. 20 ft. over SE. slope; through scattering sage brush.
1.00	Rim of mesa, bears NE. and SW.; asc. 37 ft. over gradual S. slope.

SUBDIVISIONS OF T.38 N., R.10 W.

Chains

10.20 Draw, course SE.; over rolling SE. slope.

21.40 Draw, course SE.

28.50 Draw, course SE.; asc. 35 ft. over SW. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap mkd.

$\frac{1}{2}$
 S30 | S29
 1934

and raise a mound of
stone, 3 ft. base, 2 ft. high, W. of cor.

Over gently rolling land.

41.10 Road, bears NW. and SE.

53.10 Wash, course E.

62.30 Head of draw, course SE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 19, 20, 29 and 30, with brass cap mkd.

T38N | R10W
 S19 | S20
 S30 | S29
 1934

and raise a mound
of stone, 3 ft. base, 3 ft. high, W. of cor.

Land: rolling.
Soil: gravel, 3rd rate.
No timber. Undergrowth: sage.

S.89°58'E., on random line, bet. secs. 20 and 29.

40.00 Set temp. $\frac{1}{2}$ sec. cor.

79.94 A point 19 lks. N. of the cor. of secs. 20, 21, 28 and 29.

Thence

N.89°50'W., on true line, bet. secs. 20 and 29.

Over mesa, slopes W.; through scattering sage brush.

8.30 Rimrock, bears NE. and SW.; desc. 130 ft. over W. slope.

13.00 Wash, 10 lks. wide, 5 ft. deep, course N.; asc. 140 ft. over E. slope.

18.90 Rimrock, bears N. and S.; over mesa.

30.50 Rimrock, faces SW.; desc. 173 ft. over SW. and W. slopes.

39.97 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap mkd.

S20
 S29
 1934

and raise a mound

SUBDIVISIONS OF T. 38 N., R. 10 W.

BOOK 4037

Chains	
	of stone, 3 ft. base, 2 ft. high, N. of cor.
40.20	Wash, 20 lks. wide, 8 ft. deep, course N.; asc. slightly.
50.60	Wash, 15 lks. wide, 8 ft. deep, course NE.; asc. 70 ft. over rolling SE. slope.
65.60	Change to steep E. slope; asc. 131 ft.
70.20	Rimrock, faces E.
71.00	Draw, course S.10°E.; asc. 15 ft. over rolling mesa.
79.94	The cor. of secs. 19, 20, 29 and 30. Land: gently rolling to mountainous. Soil: sand and rocky, 3rd and 4th rates. No timber: Undergrowth: sage.

	S. 89°48'W., on random line, bet. secs. 19 and 30.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.52	A point 2 lks. S. of the cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., hereinbefore described.
	Thence
	N. 89°49'E. on true line bet. secs. 19 and 30.
	Asc. 13 ft. over rolling mesa; through scattering sage.
5.40	Rimrock, bears SW. and N.; desc. 60 ft. over E. slope.
11.70	Draw, course NE.; asc. 20 ft.
13.90	Low spur, slopes N.; desc. 23 ft.
19.50	Dim road, bears N. and S.
21.70	Gulch, 30 lks. wide, 10 ft. deep, course N.; asc. 144 ft. over steep NW. slope.
29.00	Rimrock, bears NE. and SW.
29.20	Rocky spur, slopes N.; desc. 135 ft. over NE. slope.
37.00	Draw, course N.; over valley land.
39.52	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4} \frac{S19}{S30}$ 1934
	and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
42.00	Gulch, 30 lks. wide, 10 ft. deep, course N. 30°W.; asc. 100 ft. over W. slope.
46.90	Spur, slopes N.; desc. 50 ft. over E. slope.
52.50	Draw, 20 ft. deep, course NW.; over gently rolling land.
79.52	The cor. of secs. 19, 20, 29 and 30. Land: gently rolling and broken. Soil: rocky, sandy, loam, 2nd and 3rd rates. No timber. Undergrowth: sage and Mormon tea.

SUBDIVISIONS OF T. 38 N., R. 10 W.

Chains

N. 0°03'W., bet. secs. 19 and 20.

Over mesa; through scattering sagebrush.

16.20 Rimrock, bears NW. and SE.; desc. 75 ft. over NE. slope.

19.50 Gulch, course E.; asc. 144 ft. over broken SE. slope.

23.50 Rimrock, bears NE. and SW.; over mesa.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, with a stone, 6x6x2 ins., mkd. X; deposited at base, and in a mound of stone to top, for 1/4 sec. cor. with brass cap mkd.

1/4
S19 | S20
1934

Desc. 120 ft. over N. slope.

55.20 Gulch, course NE.; asc. 40 ft. over SE. slope.

59.30 Spur, slopes E.; desc. 114 ft. over NE. slope.

73.20 Same gulch, course NW.; asc. 15 ft. over SW. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 17, 18, 19 and 20, with brass cap mkd.

T38N | R10W
S18 | S17
S19 | S20
1934

and raise a mound of stone, 3 1/2 ft. base, 2 1/2 ft. high, W. of cor.

Land: rolling.

Soil: rocky, sandy, clay loam, 2nd and 3rd rates.

No timber. Undergrowth: sage and Mormon tea.

S. 89°50'E., on random line, bet. secs. 17 and 20.

40.00 Set temp. 1/4 sec. cor.

80.14 A point 14 lks. N. of the cor. of secs. 16, 17, 20 and 21.

Thence

N. 89°44'W., on true line, bet. secs. 17 and 20.

Asc. 135 ft. over general E. slope; through scattering sage brush.

14.10 Flat spur, slopes SE.; desc. 15 ft. over SW. slope.

27.40 Draw, course SE.; asc. 50 ft. over SE. slope.

32.50 Low spur, slopes S.; desc. 25 ft.

35.10 Draw, course S.; asc. 45 ft. over E. slope.

40.07 Set an iron post, 3 ft. long, 1 in. diam., 3 ins. in the ground, with a stone, 6x5x4 ins., mkd. X, deposited at base, and in a mound of stone to top, for 1/4 sec. cor., with brass cap mkd.

Chains

S17
 $\frac{1}{4}$ S20
 1934

- 40.40 Small spur, slopes S.; asc. 135 ft. over broken SE.slope.
 51.10 Low ridge, bears NE. and W.; over level top of same.
 66.50 Same low ridge, bears SW. and E.
 73.50 Rocky spur, slopes NW.; desc. 80 ft. over SW. slope.
 80.14 The cor. of secs. 17,18,19 and 20.

Land: rolling.
 Soil: sand and clay loam, 3rd rate.
 No timber. Undergrowth: sage and Mormon tea.

S.89°49'W., on random line, bet. secs. 18 and 19.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.44 A point 9 lks. N. of the cor. of secs. 13,18,19 and 24, on the W. bdy. of the Tp., hereinbefore described.

Thence

N.89°45'E., on true line, bet. secs. 18 and 19.

Over gently rolling land; through scattering sage brush.

- 6.20 Wash, course NE.; asc. 10 ft.
 9.40 Spur, slopes NE.; desc. 15 ft.
 10.50 Dim road, bears N. and S.
 11.50 Wash, 10 lks. wide, course NE.; asc. 127 ft. over NW.slope.
 22.40 Ridge, bears NE. and SW.; desc. 23 ft. over SE. slope.
 39.44 Set an iron post, 3 ft. long, 1 in. diam., 3 ins. in the ground, with a stone, 8 x 4 x 2 ins., mkd. X, deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec.cor., with brass cap mkd.

S18
 $\frac{1}{4}$ S19
 1934

Cor. stands on low spur, slopes S.

Desc. 127 ft. over NE. slope.

- 44.40 Drain, course NE.; desc. gently.
 53.30 Dim road, bears NE. and SW.
 53.60 Wash, 30 lks. wide, course NE.; asc. 115 ft. over W.slope.
 61.80 Ridge, bears N. and S.; desc. 52 ft. over E. slope.
 66.40 Head of ravine, course NE.; asc. 60 ft. over W. slope.
 72.20 Point of spur, slopes N.; desc. 76 ft. over NE. slope.

Chains

- 76.30 Wash, course NW.; asc. 34 ft. over gentle SW. slope.
- 79.44 The cor. of secs. 17,18,19 and 20.
- Land: rolling.
Soil: gravel and rocky loam, 3rd and 4th rates.
Timber: none. Undergrowth: sage and buck brush.
-
- N.0°03'W., bet. secs. 17 and 18.
- Asc. 75 ft. over SW. slope; through scattering sagebrush.
- 7.00 Spur, slopes NW.; desc. 34 ft.
- 11.40 Change to N. slope; desc. 95 ft.
- 15.60 Wash, 4 lks. wide, course NW.; asc. 66 ft. over SW. slope.
- 23.40 Spur, slopes NW.; desc. 100 ft. over NE. slope.
- 33.40 Drain, course NW.; asc. 10 ft.
- 38.00 Low spur, slopes NW.; desc. 10 ft.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 4 ins. in the ground, with a stone, 6 x 5 x 4 ins., mkd. X, deposited at base, and in a mound of stone to top, for sec.cor., with brass cap mkd.
- S18 | S17
1934
- Desc. 68 ft. over NW. slope.
- 46.40 Wash, 50 lks. wide, dim road in bottom, course NE.; asc. 110 ft. over SE. slope.
- 60.20 Spur, slopes NE.; desc. 88 ft. over NW. slope.
- 68.40 Wash, 10 lks. wide, course NE.; asc. 20 ft.
- 73.30 Short spur, slopes E.; desc. 90 ft. over NE. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 7,8,17 and 18, with brass cap mkd.
- T38N R10W
S 7 | S 8
S18 | S17
1934
- and raise a mound
of stone, 3 ft. base, 3 ft. high, W. of cor.
- Land: rolling and broken.
Soil: loam, rocky, 3rd and 4th rates.
No timber. Undergrowth: sage and Mormon tea.
-
- S.89°44'E., on random line, bet. secs. 8 and 17.
- 40.00 Set temp. sec. cor.
- 79.92 A point 7 lks. S. of the cor. of secs. 8,9,16 and 17..

Chains	
	Thence
	N.89°47'W., on true line, bet. secs. 8 and 17.
	Over gently rolling land; through scattering sage brush.
15.50	Road, bears SE. to Mt. Trumbull and NW. to Hurricane.
39.96	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap mkd.
	$\begin{array}{r} 38 \\ \hline 317 \\ 1934 \end{array}$
	and raise a mound of
	stone, 3 ft. base, 2 ft. high, N. of cor.
40.50	Dim road, bears NE. and SW.
46.50	Dim road, bears NE. and SW.
52.50	Dim road, bears NE. and SW.
60.90	Wash, dim road in bottom, course N.20°E.
72.50	Dim road, bears S.20°E. and N.20°W.
79.92	The cor. of secs. 7,8,17 and 18.
	Land: gently rolling.
	Soil: gravel loam, 2nd rate.
	No timber. Undergrowth: sage.

	S.89°45'W., on random line, bet. secs. 7 and 18.
40.00	Set temp. $\frac{1}{2}$ sec. cor.
79.47	A point 19 lks. S. of the cor. of secs. 7,12,13 and 18, on the W. bdy. of the Tp., hereinbefore described.
	Thence
	N.89°53'E., on true line, bet. secs. 7 and 18.
	Over rolling land; through scattering sagebrush.
12.00	Wash, 10 lks. wide, 5 ft. deep, course S.; asc. 137 ft. over broken SW. slope.
23.80	Rimrock, bears NW. and SE.; desc. 22 ft. over NE. slope.
30.90	Rimrock, bears NW. and SE.; desc. 125 ft. over NE. slope.
39.47	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap mkd.
	$\begin{array}{r} 37 \\ \hline 318 \\ 1934 \end{array}$
	and raise a mound of
	stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.
	Asc. 11 ft. over NW. slope.
44.30	Rocky spur, slopes N.; desc. 78 ft. over E. slope.

SUBDIVISIONS OF T.38 N., R.10 W.

Chains	
48.50	Change to NE. slope; desc. 107 ft., to 73.20 chs.
57.50	Small ravine, course NE.
73.20	Rimrock, bears NW. and SE.; desc. 111 ft. over NE. slope.
79.47	The cor. of secs. 7, 8, 17 and 18.
	Land: rolling. Soil: gravel, 3rd rate. No timber. Undergrowth: sage.

	N.0°03'W., bet. secs. 7 and 8.
	Desc. 38 ft. over gentle NE. slope; through scattering sage brush.
6.90	Road, bears NW. and SE.
7.90	Ditch, 5 lks. wide, course NW.
18.20	Road, bears NW. and SE.
34.90	Ditch, 5 lks. wide, 1½ ft. deep, course NE.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 4 sec. cor., with brass cap mkd.
	$\begin{array}{c} \uparrow \\ S7 S8 \\ 1934 \end{array}$
	and raise a mound
	of stone, 3 ft. base, 2 ft. high, W. of cor.
49.30	Ditch, 5 lks. wide, 1 ft. deep, course NW.
66.10	Road, bears NW. and SE.
71.50	Old road, bears NW. and SE.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 5, 6, 7 and 8, with brass cap mkd.
	$\begin{array}{c} T38N R10W \\ 36 S5 \\ 37 S8 \\ 1934 \end{array}$
	and raise a mound
	of stone, 4 ft. base, 2 ft. high, W. of cor.
	Land: gently rolling. Soil: sand and gravel, 2nd rate. No timber. Undergrowth: sage.

	S.89°47'E., on random line, bet. secs. 5 and 8.
40.00	Set temp. 4 sec. cor.
79.94	A point 3 lks. S. of the cor. of secs. 4, 5, 8 and 9.
	Thence
	N.89°48'W., on true line, bet. secs. 5 and 8.

SUBDIVISIONS OF T.38 N., R.10 W.

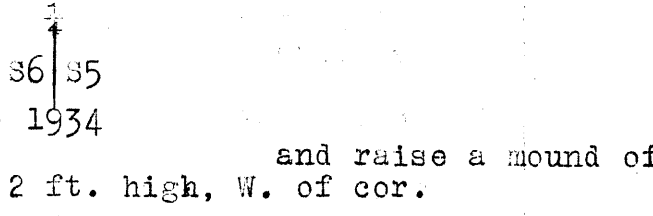
55

BOOK 4037

Chains	
	Over gentle N. slope; through scattering sagebrush.
14.00	Small drain, course N.10°E.; asc. 78 ft. over NE. slope.
39.97	Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground, with a stone, 8 x 4 x 4 ins., mkd. X, deposited at base, and in a mound of stone to top, for $\frac{1}{2}$ sec. cor. with brass cap mkd.
	$\frac{135}{438}$ 1934
45.00	Change to gentle NE. slope; desc. 36 ft.
62.30	Small wash, road in bottom, course N.25°E.; over gentle N. slope.
79.94	The cor. of secs. 5,6,7 and 8. Land: gently rolling. Soil: gravel loam, 2nd rate. No timber. Undergrowth: sage.

	S.89°53'W., on random line, bet. secs. 6 and 7.
40.00	Set temp. $\frac{1}{2}$ sec. cor.
79.22	A point 2 lks. N. of the true point for cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp. hereinbefore described. Thence N.89°52'E., on true line, bet. secs. 6 and 7. Desc. 160 ft. over steep NE. slope; through scattering sage brush.
9.00	Change to gentle NE. and E. slopes; desc. 38 ft.
39.22	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap mkd.
	$\frac{136}{437}$ 1934
	and raise a mound of stone, 3 $\frac{1}{2}$ ft. base, 2 ft. high, N. of cor.
	Desc. 13 ft. over gentle E. slope.
43.80	Road, bears NW. and SE.
45.50	Swale, drains NE.; asc. gently.
55.80	Old washed-out road, bears NW. and SE.
63.50	Road, bears NW. and SE.
73.00	Ditch, 5 lks. wide, course NE.
75.20	Road, bears N. and S.
79.22	The cor. of secs. 5,6,7 and 8.

SUBDIVISIONS OF T.38 N., R.10 W.

Chains	<p>Land: gently rolling. Soil: sand and gravel, 2nd rate. No timber. Undergrowth: sage.</p>
	<p>N.0°14'W., on random line, bet. secs. 5 and 6.</p>
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.71	A point 9 lks. E. of the cor. of secs. 5,6,31 and 32, on the N. bdy. of the Tp., hereinbefore described.
	Thence
	S.0°18'E., on true line, bet. secs. 5 and 6.
	Over gradual SE. slope; through scattering sage brush.
1.70	Draw, course NE.; over gradual NW. slope.
6.70	Ridge, bears NE. and SW.; desc. 10 ft.
13.70	Small draw, course NE.; desc. 17 ft.
19.20	Low spur, slopes NE.
22.40	Ditch, 5 lks. wide, 1 ft. deep, course NE.
23.40	Road, from NE., branches SW. and S.
29.00	Same ditch, course NW.
30.10	Road, bears NW. and SE.
39.71	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	
	Over gentle NE. slope.
54.70	Low spur, slopes NE.; over gentle SE. slope.
63.70	Road, bears NE. and SW.
64.60	Same ditch, course NE.
79.71	The cor. of secs. 5,6,7 and 8.
	<p>Land: rolling and gently rolling. Soil: gravel, 2nd and 3rd rates. No timber. Undergrowth: sage.</p>
	FINAL TEST.
	Continued satisfactory adjustment of instruments is indicated from preliminary tests described in notes of T.37 N., R.1 W., surveyed immediately after the foregoing.

Chains

GENERAL DESCRIPTION

The township lies about 25 miles south of the town of Hurricane, Utah, from which it is reached by a moderately good road, which continues south-easterly to Mt. Trumbull. Numerous other roads reach every part of the township.

Land is gently rolling and rolling in character with occasional sandstone escarpments from 10 to 50 ft. in height. Soil is generally sand or gravel, with smaller amounts of clay and loam, usually of fair depth and with a small rock content.

There is no timber and little undergrowth. Sage brush with small amounts of Mormon tea, buck brush and cacti are the varieties.

The only industry is stock-raising, and no other appears possible. Farming is impracticable and there is no mineral. Water is very scarce. An attempt to conserve some by ditching to a natural reservoir in sec. 6 has so far been unsuccessful on account of the porous nature of the soil. A drainage area of about 6 square miles in the SW. part of the township runs into a small underground lake in a cave in sec. 16.

Roads, ditches and the ranch establishment of O.A. Higley in sec. 35 are the only improvements.

4-680
(Revised May 1934)

FIELD ASSISTANTS

to J. P. Hester

NAMES	CAPACITY
James B. Chumbley	1st Chainman
Dawson Cooley	2nd Chainman
Paul Greenhaw, Sr.	Moundsman
John Arrington	Moundsman
M.L. Patrick	Moundsman
Perry Munger, Jr.	Axman
James E. Kelly	Flagman
Charles L. Powers	Flagman

138
59

BOOK 4087

CERTIFICATE OF UNITED STATES SURVEYOR

I, J. P. Hester, U. S. Transitman, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15th day of September, 1933 received from the district cadastral engineer for Arizona, with assignment instructions dated June 19, 1934, I have surveyed

PART of the SUBDIVISION LINES of
TOWNSHIP 38 NORTH, RANGE 10 WEST

of the Gila & Salt River Base & Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

Phoenix, Arizona
February 12, 1935

J. P. Hester
U. S. Transitman

~~CERTIFICATE OF APPROVAL~~

~~Office of U.S. Supervisor of Surveys,~~

~~, 19~~

~~The foregoing field notes of the survey of~~

~~executed by~~
~~under special instructions dated~~, ~~and assignment instructions dated~~, ~~having been critically examined, and the necessary corrections made prior to their certification by the engineer, the said field notes, and the survey therein described, are hereby approved.~~

~~U.S. Supervisor of Surveys.~~

~~CERTIFICATE OF TRANSCRIPT~~

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~
~~is a true copy of the original field notes on file in the public survey office.~~

~~U.S. Supervisor of Surveys.~~

4-680
(August, 1926)

BOOK 4037

FIELD ASSISTANTS.

to Ben D. Procter

NAMES.	CAPACITY.
Neil Greenhaw	1st Chainman
Orson A. Stone	2nd Chainman
Albert A. Blevins	Moundsman
Bert Alexander	Moundsman
Bill . Carver	Moundsman
James A. Kelly	Axman
Guy Tripp	Axman
John P. Edgar	Axman
Charles L. Turner	Flagman

140
61

BOOK 4037

CERTIFICATE OF UNITED STATES SURVEYOR

I, Ben D. Procter U.S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Arizona bearing date of the 15th day of September, 1933, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of

SUBDIVISION LINES

of

TOWNSHIP 38 NORTH, RANGE 10 WEST

of the Gila and Salt

River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Phoenix, Arizona
February 12, 1935

Ben Procter

U.S. Transitman, Jr.

~~APPROVAL~~

~~Office of U. S. Supervisor of Surveys,~~

~~10~~

~~The foregoing field notes of the survey of~~

~~executed by~~

~~under his special instructions dated _____, 19____, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.~~

~~U. S. Supervisor of Surveys.~~

~~I certify that the foregoing transcript of the field notes of the above-described surveys in _____, has been correctly copied from the original notes on file in this office.~~

~~U. S. Supervisor of Surveys.~~

142
62

4-680
(August, 1926)

BOOK 4037

FIELD ASSISTANTS.

to John L. Warboys

NAMES.	CAPACITY.
Delmar F. Vincent	1st Chainman
William M. Heina	2nd Chainman
Paul Hultquist	Moundsman
Merrill E. Silverthorn	Axman
John W. Martinie	Axman
Francis T. Sweeney	Axman
Frank Burt	Flagman

142
63

BOOK 4037

CERTIFICATE OF UNITED STATES SURVEYOR

I, John L. Warboys U.S. Cadastral Engineer, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Arizona bearing date of the 15th day of September, 1933, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of

EAST, WEST and NORTH BOUNDARIES

TOWNSHIP 38 NORTH, RANGE 10 WEST

of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Phoenix, Arizona,
March 27, 1935.

John L. Warboys
U.S. Cadastral Engineer.

APPROVAL

OFFICE OF U. S. SUPERVISOR OF SURVEYS,
Denver, Colorado APR 2 -, 1935

The foregoing field notes of the survey of

EAST, WEST and NORTH BOUNDARIES

and

SUBDIVISION LINES

TOWNSHIP 38 NORTH, RANGE 10 WEST

of the Gila and Salt River Base and Meridian in the State of Arizona

~~executed by~~ John L. Warboys, U. S. Cadastral Engineer, and

~~created by~~ Ben D. Procter and J. P. Hester, U. S. Transitmen

under his special instructions dated September 15, 1933, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Franklin J. ...
U. S. Supervisor of Surveys.

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~
~~has been correctly copied from the original notes on file in this office.~~

~~U. S. Supervisor of Surveys.~~