

Book "B"

4-679

BOOK 4051

## FIELD NOTES

OF THE RESURVEY OF

*the South Boundaries of Tps. 6 South, Ranges 5 and 6 West,  
South and East Boundaries of Tp. 7 South, Range 7 West,  
and Part of the South Boundary of Tp. 7 South, Range 8 West.*

AND OF THE SURVEY OF

*the West and North Boundaries of Tps. 8 and 9 South, Ranges 5 and 6 West,  
and Tp. 9 South, Range 7 West  
and the West Boundaries of Tp. 7 South, Range 5 West  
and Tp. 8 South, Range 7 West*

*Of the Gila and Salt River Base and Meridian,*

In the State of *Arizona*

EXECUTED BY

*Walter H. Good, U.S. Surveyor*

*Alex. T. Harris, U.S. Cadastral Engineer*

*George M. Kurtzweil, U.S. Cadastral Engineer*


In the capacity of U. S. Surveyor, under Special Instructions dated *December 12, 1933*, issued by the District Cadastral Engineer to govern surveys included in Group No. *199*, *Arizona*, which were approved by the Commissioner of the General Land Office, *December 15, 1933*, and Assignment Instructions dated *January 10, 1934*.

Resurvey and Survey commenced *December 29*, 1933

Resurvey and Survey completed *February 6*, 1934

# INDEX DIAGRAM.


Township \_\_\_\_\_, Range \_\_\_\_\_

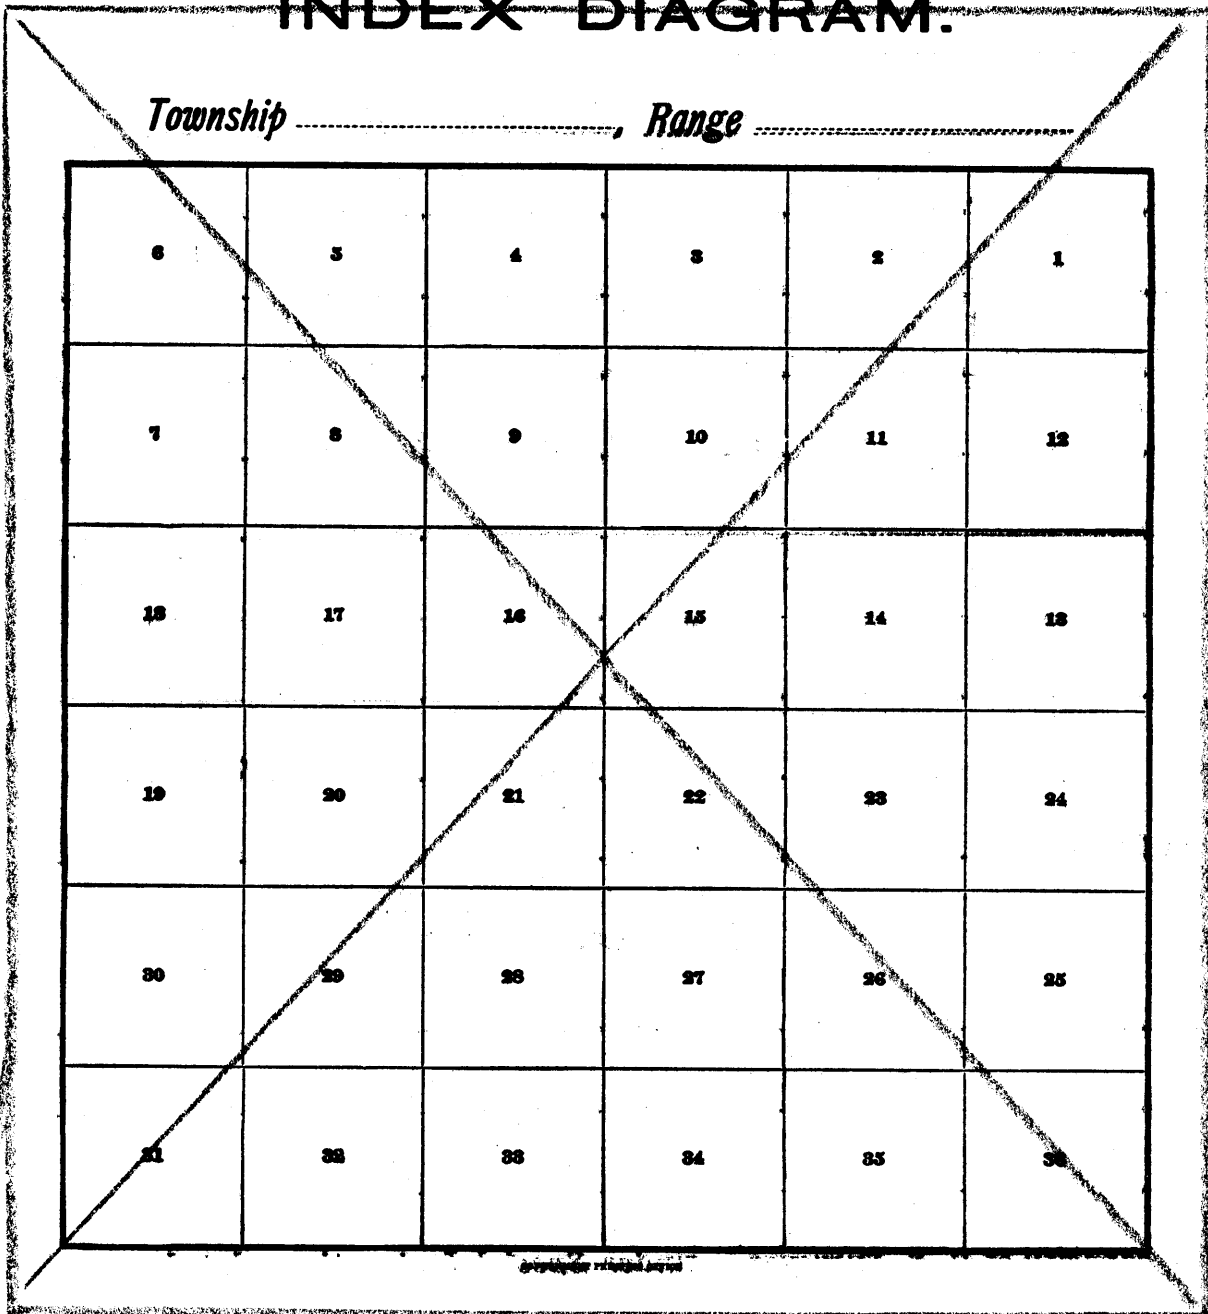

INDEX-DIAGRAM

T.6S.-R.8W.							T.6S.-R.7W.							T.6S.-R.6W.							T.6S.-R.5W.							T.6S.-R.4W.	
31	30	29	28	27	26	25	31	30	29	28	27	26	25	31	30	29	28	27	26	25	31	30	29	28	27	26	25	31	30
							21-20	19	18-17	17-16	15	14	12-11	10-9	8-7	7-6	6-5	4											
							6	5	4	3	2	1	65	6	5	4	3	2	1										
							7						12-65	7															
							18						13-64	18															
							19						24-64	19															
							30						25-63	30															
							31	32	33	34	35	36	36-63	31	32	33	34	35	36										
							78-82	81	81-80	80	79	79	59	59-60	60	60-61	61	61-62											
							77	5	4	3	2	1	57	6	5	4	3	2	1										
							12						12-57	7															
							13						13-56	18															
							24						24-55	19															
							25						25-55	30															
							36	32	33	34	35	36	36-54	31	32	33	34	35	36										
							89	88	88	88	87	87	74	53-52	52-51	51-50	50	49	48										
							86	5	4	3	2	1	46	6	5	4	3	2	1										
							12						12-46	7															
							13						13-45	18															
							24						24-44	19															
							25						25-44	30															
							36	30	31				36-43	31															

SECOND							STANDARD							PARALLEL							SOUTH						
T.10S.-R.7W.							T.10S.-R.6W.							T.10S.-R.5W.							T.10S.-R.4W.						

- Accepted surveys.
- Unsurveyed.
- Resurveyed under this group. { Notes of 2nd. Std. Par. S. in Book "A"  
Notes of Tp. Bdrs. herein. ----- }
- Surveyed under this group. { Notes of Tp. Bdrs. herein. -----  
Notes of Sub. Lines in Bks. C, D, E, F, G, H, I and J }
- Resurveyed under Group No. 198.
- Surveyed under Group No. 198.
- Resurveyed under Group No. 200.
- Surveyed under Group No. 200.
-  Areas surveyed as per accepted plats on file.

The resurveys and surveys herein described were executed by George M. Kurtzweil, U.S. Cadastral Engineer, Walter H. Good, U.S. Surveyor and Alex T. Harris, U.S. Cadastral Engineer, using respectively, Buff and Buff transits Nos. 9988 and 10127, and W. & L. E. Gurley transit No. 20133, constructed in accordance with the standard specifications of the General Land Office. The instruments are equipped with full vertical circles reading to single minutes and with the improved Smith solar attachment. The instruments were in good condition, and having been placed in satisfactory adjustment prior to beginning the survey, and tested and found free from appreciable error, were approved by the district cadastral engineer on December 15, 1933, and January 10, 1934.

The directions of the exterior lines were determined by the solar transit method. The measurements were made with Lallie steel tapes 5 chs. in length, graduated every link for the first 100 lks. and the balance at intervals of 10 lks. The tapes were tested by comparison with a Lufkin standard and found correct. The measurements were made on the slope and the vertical angles of each interval were ascertained by clinometers in good adjustment; the horizontal equivalents are entered in the field note record.

The data furnished with the special instructions gives the geographic position of camp at Gila Bend, Arizona, near the SW. cor. of T. 5 S., R. 4 W., G & S. R. B. & M., as follows; latitude  $32^{\circ}56'30''N.$ , and longitude  $112^{\circ}43'00''W.$

December 29, 1933, in camp at Gila Bend, Arizona, with Buff and Buff transit No. 9988 about 10 chs. N. of the SW. cor. of T. 5 S., R. 4 W., at 1h 38m 02s a.m., by my watch which reads correct 105th meridian time as determined from Western Union clock, I, George M. Kurtzweil, U.S. Cadastral Engineer, observe Polaris at Western elongation, making two sights each with the telescope in direct and reversed positions, and placing a tack at the mean point on a peg driven firmly in the ground 10 chs. N.

After sunrise I lay off the azimuth of Polaris  $1^{\circ}14'44''$  and mark a meridian on a second peg to the east of the mean point in the line determined by the observation.

In order to verify the latitude of this station and the reading of my watch, I make a meridian observation of the sun, first setting on the lower limb and noting the transit of the west limb, then, after reversal of the instrument, setting on the upper limb and noting the transit of the east limb as follows:

Mean observed altitude	$33^{\circ}51'25''$
Reduced latitude	$32^{\circ}56'29''$
Mean watch time of observation	12h30m00s
Watch fast of l.m.t.	30m56.53s
Same by reference with Western Union time and calculated difference in longitude	30m.52s

Every 30 min. from 8 to 10.30 a.m. and from 1.30 to 4 p.m., we make proper settings on the arcs of the solar attachments and ascertain that the resulting orientation of the instruments when compared with the meridian established by Polaris observation, has a maximum error of less than  $1'30''$ .

We repeat the tests of the arcs daily by noon observations and verify the meridional indications at frequent intervals throughout the survey.

January 8, 1934, at the standard cor. of Tps. 9 S., Rs. 5 and 6 W., in latitude  $32^{\circ}35'36''$  N., and longitude  $112^{\circ}49'14''$  W., as shown in the data furnished with the special instructions, at 10h 30m a.m. solar time with Buff and Buff transit No. 10127, I, Walter H. Good, U.S. Surveyor, make a series of three altitude observations upon the sun for azimuth, each with the telescope in direct and reversed positions, observing opposite limbs of the sun, and reading the horizontal deflection angle to a flag about 20 chs. N.

Mean horizontal angle	$34^{\circ}33'52''$
Mean vertical angle	$26^{\circ}38'37''$
Mean true bearing to flag	N. $0^{\circ}00'46''$ E.

Maintaining this meridian by transit line throughout the working day, from 8 a.m. to 11 a.m., and from 1 p.m. to 4 p.m. I make proper settings on the arcs of the solar attachment and ascertain that the resulting orientation of the instrument has a maximum error of less than  $1''30''$ .

I repeat the tests of the arcs by noon observation, and verify the meridional indications at frequent intervals throughout the survey.

## Resurvey of the South Boundary of T. 6 S., R. 5 W.

BOOK 4051

Chains

The S. bdy. of T. 6 S., R. 5 W., was surveyed in 1891 by Daniel Drummond, U.S.D.S., establishing cors. thereon to refer to areas on both sides of the line at 40 ch. intervals counting from the east. The recorded course and length of the line are, N.89°41'E., 480.20 chs. No retracement or resurvey of any part of this line is of record. The following notes describe a dependent resurvey of the entire line reconstructing all original cors. and altering their reference to areas N. of line only, and establishing a new set of cors. thereon to refer to areas S. of line only, at 40. ch. intervals in departure counting from the closing cor. of Ts. 7 S., Rs. 4 and 5 W.

RETRACEMENT FOR RESURVEY

- From the cor. of Ts. 6 S., Rs. 4 and 5 W.
- 40.23 S.89°41'W., on a random line on S. bdy. of sec. 36. (E.  $\frac{1}{2}$ ).  
A point 7 lks. S. of the  $\frac{1}{4}$  sec. cor.  
True course and dist.; S.89°47'W., 40.23 chs.  
Thence
- 40.16 S.89°41'W., on a random line on S. bdy. of sec. 36. (W.  $\frac{1}{2}$ ).  
A point 8 lks. S. of the cor. of secs. 1, 2, 35 and 36.  
True course and dist.; S.89°48'W., 40.16 chs.
- 40.10 S.89°41'W., on a random line on S. bdy. of sec. 35. (E.  $\frac{1}{2}$ ).  
A point 13 lks. N. of the  $\frac{1}{4}$  sec. cor.  
True course and dist.; S.89°30'W., 40.10 chs.  
Thence
- 40.03 S.89°41'W., on a random line on S. bdy. of sec. 35. (W.  $\frac{1}{2}$ ).  
A point 13 lks. N. of the cor. of secs. 2, 3, 34 and 35.  
True course and dist.; S.89°30'W., 40.03 chs.
- 40.12 S.89°41'W., on a random line on S. bdy. of sec. 34. (E.  $\frac{1}{2}$ ).  
A point 26 lks. S. of the  $\frac{1}{4}$  sec. cor.  
True course and dist.; N.89°57'W., 40.12 chs.  
Thence
- 40.15 S.89°41'W., on a random line on S. bdy. of sec. 34. (W.  $\frac{1}{2}$ ).  
A point 18 lks. N. of the cor. of secs. 3, 4, 33 and 34.  
True course and dist.; S.89°26'W., 40.15 chs.
- 39.86 S.89°41'W., on a random line on S. bdy. of sec. 33. (E.  $\frac{1}{2}$ ).  
A point 47 lks. S. of the witness  $\frac{1}{4}$  sec. cor.  
40.16 A point 47 lks. S. of the true point for  $\frac{1}{4}$  sec. cor.  
True course and dist.; N.89°39'W., 40.16 chs.  
Thence
- 40.04 S.89°41'W., on a random line on S. bdy. of sec. 33. (W.  $\frac{1}{2}$ ).  
A point 8 lks. S. of the cor. of secs. 4, 5, 32 and 33.  
True course and dist.; S.89°48'W., 40.04 chs.
- 40.04 S.89°41'W., on a random line on S. bdy. of sec. 32. (E.  $\frac{1}{2}$ ).  
A point 13 lks. S. of the  $\frac{1}{4}$  sec. cor.  
True course and dist.; S.89°52'W., 40.04 chs.  
Thence
- 40.12 S.89°41'W., on a random line on S. bdy. of sec. 32. (W.  $\frac{1}{2}$ ).  
A point 6 lks. N. of the cor. of secs. 5, 6, 31 and 32.  
True course and dist.; S.89°36'W., 40.12 chs.
- 39.99 S.89°41'W., on a random line on S. bdy. of sec. 31. (E.  $\frac{1}{2}$ ).  
A point 15 lks. S. of the  $\frac{1}{4}$  sec. cor.  
True course and dist.; S.89°54'W., 39.99 chs.  
Thence
- 39.97 S.89°41'W., on a random line S. bdy. of sec. 31. (W.  $\frac{1}{2}$ ).  
A point 40 lks. S. of the cor. of Ts. 6 and 7 S., Rs. 5 and 6 W.  
True course and dist.; N.89°45'W., 39.97 chs.

## Resurvey of the South Boundary of T. 6 S., R. 5 W.

## Chains

From the cor. of Tps. 6 S., Rs. 4 and 5 W., reconstructed under current Group No. 198, which is an iron post, 3 ins. diam., projecting 9 ins. above ground, firmly set, marked on brass cap, and witnessed as described in the field notes of survey of W. bdy. of T. 7 S., R. 4 W.

S. 89° 47' W., on true line on S. bdy. of sec. 36. (E.  $\frac{1}{2}$ ).

Over rolling land, through scattering timber and dense undergrowth.

10.12

The closing cor. of Tps. 7 S., Rs. 4 and 5 W., established under current Group No. 198, which is an iron post, 3 ins. diam., projecting 9 ins. above the ground, firmly set, mkd. on brass cap, and witnessed as described in the field notes of survey of W. bdy. of T. 7 S., R. 4 W.

40.23

The  $\frac{1}{4}$  sec. cor. of secs. 1 and 36, which is a lava stone, 8x8x10 ins. above ground, firmly set, marked and witnessed as described in the official record.

Reconstruct this cor. monument with altered reference as follows:

Alongside old stone, set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 36 only, with brass cap mkd.

$\frac{1}{4}$  S 36

1933

raise a mound  
of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.

Thence

S. 89° 48' W., on true line on S. bdy. of sec. 36. (W  $\frac{1}{2}$ )

Over rolling land, through scattering timber and dense undergrowth.

4.55

Wash, 15 fks. wide, course N.

9.89

(40.00 chs. W. departure from NE. cor. of sec. 1.)  
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of secs. 1 only, with brass cap mkd.

$\frac{1}{4}$  S 1

1933

raise a mound  
of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, S. of cor.

40.16

The cor. of secs. 1, 2, 35 and 36, which is a lava stone 4x5x4 ins. above ground, marked with 1 notch on E. edge and 5 notches on W. edge, firmly set. No accessories. No trace can be found of wood post of record as monument -ing this cor,

Reconstruct this cor. monument with altered reference as follows:

Alongside old stone, set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 35 and 36, only, with brass cap mkd.

## Resurvey of the South Boundary of T. 6 S., R. 5 W.

Chains

T 6 S R 5 W	S 35	S 36
-------------	------	------

S 1

T 7 S R 5 W

1933

raise a mound  
of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

Land, rolling.

Soil, sandy and gravelly loam, stony; 1st and 2d rates.

Timber, scattering ironwood, mesquite and palo verde.

Undergrowth, greasewood, catclaw and cacti.

S.  $89^{\circ}30'W.$ , on true line on S. bdy. of sec. 35. ( $E\frac{1}{2}$ )

Over rolling land, through scattering timber and undergrowth.

9.73

(80.00 chs. W. departure from NE. cor. of sec. 1.)  
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 1 and 2, only, with brass cap mkd.

T 6 S R 5 W	S 35
-------------	------

S 2 S 1

T 7 S R 5 W

1933

raise a mound  
of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, S. of cor.

32.00

Wash, 20 lks. wide, course NW.

40.10

The  $\frac{1}{4}$  sec. cor. of secs. 2 and 35, which is a lava stone  $8 \times 10 \times 8$  ins. above ground, firmly set and marked  $\frac{1}{4}$  on N. face. No accessories. No trace can be found of wood post of record as monumenting this cor.

Reconstruct this cor. monument with altered reference as follows:

Alongside old stone, set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for  $\frac{1}{4}$  sec. cor. of sec. 35 only, with brass cap mkd.

 $\frac{1}{4}$  S 35

1933

raise a mound  
of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

Thence

S.  $89^{\circ}30'W.$ , on true line, on S. bdy. of sec. 35. ( $W\frac{1}{2}$ )

Over rolling land, through scattering timber and undergrowth.

9.63

(40.00 chs. W. departure from NE. cor. of sec. 2)  
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 2 only, with brass cap mkd.



## Resurvey of the South Boundary of T. 6 S., R. 5 W.

Chains

T 6 S	R 5 W
S 2	

1933

raise a mound  
of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, S. of cor.

20.50 Wash, 20 lks. wide, course NW.

22.90 Wash, 30 lks. wide, course NW.

40.03 The cor. of secs. 2, 3, 34 and 35, which is a lava stone  
5x5x6 ins. above ground, firmly set and marked with 4  
notches on W. edge and 2 notches on E. edge. No access-  
ories. No trace can be found of wood post recorded as  
monumenting this cor.

Reconstruct this cor. monument with altered reference as  
follows:

Alongside old stone, set an iron post, 3 ft. long, 2 ins.  
diam., 28 ins. in the ground, for cor. of secs. 34 and  
35 only, with brass cap mkd.

T 6 S	R 5 W
S 34	S 35

S 2	
T 7 S	R 5 W

1933

of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor. Raise a mound

Land, rolling.

Soil, sandy and gravelly loam; 1st rate.

Timber, scattering ironwood, mesquite and palo verde.

Undergrowth, greasewood, scattering catclaw and cacti.

N.89°57'W., on true line on S. bdy. of sec. 34. ( $E\frac{1}{2}$ )

Over rolling land, through scattering timber and dense  
undergrowth.

9.60 (80.00 chs. in W. departure from NE. cor. of sec. 2)  
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in  
the ground, for cor. of secs. 2 and 3 only, with brass  
cap mkd.

T 6 S	R 5 W
S 34	

S 3	S 2
T 7 S	R 5 W

1933

of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, S. of cor. raise a mound

40.12 The  $\frac{1}{4}$  sec. cor. of secs. 3 and 34, which is a mesquite  
post, 3 ins. square, marked  $\frac{1}{2}$ S on N. face, firmly set  
at midpoint between traces of pits E. and W.

Reconstruct this cor. monument with altered reference as  
follows:

Alongside old wood post, set an iron post, 3 ft. long,

## Resurvey of the South Boundary of T. 6 S., R. 5 W. BOOK 4051

## Chains

1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 34 only, with brass cap mkd.

$\frac{1}{4}$  S 34

1933

of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor. raise a mound

Thence

S.  $89^{\circ}26'W.$ , on true line on S. bdy. of sec. 34. ( $W\frac{1}{2}$ )

Over rolling land, through scattering timber and dense undergrowth.

0.50 Wash, 20 lks. wide, course N.  $20^{\circ}W.$

9.48 (40.00 chs. W. departure from NE. cor. of sec. 3) Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 3 only, with brass cap mkd.

$\frac{1}{4}$  S 3

1933

of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, S. of cor. raise a mound

24.20 Wash, 20 lks. wide, course NW.

40.15 The cor. of secs. 3, 4, 33 and 34, which is a lava stone 4x6x5 ins. above ground, firmly set, marked with 3 notches on each of E. and W. edges. No accessories.

Reconstruct this cor. monument with altered reference as follows:

Alongside old stone, set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 33 and 34 only, with brass cap mkd.

T 6 S | R 5 W

S 33 | S 34

S 33

T 7 S | R 5 W

1933

18x18x12 ins. one each, NE. and NW. of post, 3 ft. dist. dig pits

Land, rolling.

Soil, sandy and gravelly loam; 1st rate.

Timber, scattering ironwood, mesquite and palo verde.

Undergrowth, greasewood, scattering catclaw and cacti.

N.  $89^{\circ}39'W.$ , on true line on S. bdy. of sec. 33. ( $E\frac{1}{2}$ )

Over rolling land, through scattering timber and dense undergrowth.

3.30 Tucson, Cornelia and Gila Bend Railroad, bears N.  $25\frac{1}{2}^{\circ}E.$ , to Gila Bend and S.  $25\frac{1}{2}^{\circ}W.$ , to Ajo.


Resurvey of the South Boundary of T. 6 S., R. 5 W.

Chains

5.00 Telegraph line, bears N.25 $\frac{1}{2}$ °E., and S.25 $\frac{1}{2}$ °W.

5.70 Highway, bears N.25 $\frac{1}{2}$ °E., to Cila Bend and S.25 $\frac{1}{2}$ °W., to Ajo.

9.33 (80.00 chs. W. departure from NE. cor. of sec. 3)  
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 3 and 4 only, with brass cap mkd.



1933


18x18x12 ins. one each, SE. and SW. of post., 3 ft. dist. dig pits,

26.50 Telephone line, bears N.20°E., and S.20°W.

39.86 The witness  $\frac{1}{4}$  sec. cor. of secs. 4 and 33, which is a lava stone, 6x7x8 ins. above ground, firmly set, marked  $\frac{1}{4}$  on N. face, and WC on W. face. No accessories. The  $\frac{1}{4}$  sec. cor. of secs. 4 and 33 is recorded as being monumented at true cor. point with a wood post, and the only witness  $\frac{1}{4}$  sec. cor. on this Tp. bdy. which is recorded in the original survey is that witnessing the  $\frac{1}{4}$  sec. cor. of secs. 5 and 32 which is described as a sandstone, mkd. WC  $\frac{1}{4}$  on N. face, set 30 lks. W. of true cor. point. In view of the fact that a wood post agreeing with the record description of the  $\frac{1}{4}$  sec. cor. of secs. 4 and 33 is found in this resurvey at practically the midpoint of the S. bdy. of sec. 32, and no wash in close proximity thereto, it is assumed that the record of the original survey erroneously interchanged the descriptions of these two  $\frac{1}{4}$  sec. cors. and also the marking on this stone, the physical conditions at the point where it is set, and the comparative measurements of the E. and W. halves of S. bdy. of sec. 33, determines that the witness cor. is 30 lks. E. from the true cor. point instead of 30 lks. W. as recorded.

Reconstruct this cor. monument with altered reference as follows:

Alongside old stone, set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for witness  $\frac{1}{4}$  sec. cor. of sec. 33 only, with brass cap mkd.



1933.

18x18x12 ins. one each, E. and W. of post, 3 ft. dist. dig pits,

40.16 True point for  $\frac{1}{4}$  sec. cor. of sec. 33, in wash, 15 lks. wide, course N.10°W., where it is impracticable to monument the cor. (W.C. 30 lks. S.89°39'E., described above).

Thence

S.89°48'W., on true line on S. bdy. of sec. 33. (W. $\frac{1}{2}$ )

Over rolling land, through scattering timber and dense undergrowth.

## Resurvey of the South Boundary of T. 6 S., R. 5 W. BOOK 4051

## Chains

9.17 (40.00 chs. W. departure from NE. cor. of sec. 4)  
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 4 only, with brass cap mkd.

T 6 S
S 32

1933

raise a mound  
of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, S. of cor.

30.20 Wash, 12 lks. wide, course N.10°E.

40.04 The cor. of secs. 4, 5, 32 and 33, which is a mesquite post, 4 ins. square, projecting 24 ins. above ground, illegibly mkd. on each of NE., SE., SW. and NW. faces, notched on E. and W. edges, and firmly set. No accessories. This sec. cor. is recorded as being monumented with a granite stone, mkd. 2 notches on W. edge and 4 notches on E. edge, and witnessed by pits in each sec. and mound of earth alongside. Diligent search in this vicinity failed to reveal any trace of cor. monument agreeing with this description, therefore accept the mesquite post as the original cor. monument.

Reconstruct this cor. monument with altered reference as follows:

Alongside wood post, set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 32 and 33, only, with brass cap mkd.

T 6 S	R 5 W
S 32	S 33

S 4

T 7 S	R 5 W
-------	-------

1933

dig pits,  
18x18x12 ins. one each, NE. and NW. of post, 3 ft. dist.

Land, rolling.

Soil, sandy and gravelly loam; 1st rate.

Timber, scattering ironwood, mesquite and palo verde.

Undergrowth, greasewood, scattering catclaw, ocotillo and cacti.

S.89°52'W., on true line on S. bdy. of sec. 32. (E. $\frac{1}{2}$ ).

Over rolling land, through scattering timber and dense undergrowth.

9.13 (80.00 chs. W. departure from NE. cor. of sec. 4)  
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 4 and 5 only, with brass cap mkd.

T 6 S	R 5 W
S 32	

S 5	S 4
-----	-----

T 7 S	R 5 W
-------	-------

1933

## Resurvey of the South Boundary of T. 6 S., R. 5 W.

Chains

- raise a mound
- stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, S. of cor.
- 40.04 The  $\frac{1}{4}$  sec. cor. of secs. 5 and 32, which is a mesquite post, 3 ins. square, projecting 24 ins. above ground, firmly set, and mkd.  $\frac{1}{4}$ S. on N. face. No accessories. This  $\frac{1}{4}$  sec. cor. is recorded as being witnessed 30 lks. West by reason of the true cor. point being in wash. Apparent error in the record of the original survey is hereinbefore explained in notes of description of the witness  $\frac{1}{4}$  sec. cor. of sec. 33, T. 6 S., R. 5 W.
- Reconstruct this cor. monument with altered reference as follows:
- Alongside old wood post, set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 32 only, with brass cap mkd.
- $\frac{1}{4}$  S 32
- 1933
- dig pits,
- 18x18x12 ins. one each, E. and W. of post, 3 ft. dist.
- Thence
- S.  $89^{\circ}36'$  W., on true line on S. bdy. of sec. 32. (W.  $\frac{1}{8}$ )
- Over rolling land, through scattering timber and dense undergrowth.
- 9.09 (40.00 chs. W. departure from NE. cor. of sec. 5)  
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., of sec. 5 only, with brass cap mkd.
- $\frac{1}{4}$  S 5
- 1933
- raise a mound
- of stone, 2 ft. base;  $1\frac{1}{2}$  ft. high, S. of cor.
- 40.12 The cor. of secs. 5, 6, 31 and 32, which is a mesquite post, 3 ins. square, projecting 24 ins. above ground, broken at top, faintly marked on each of NE., SE., SW. and NW. faces and notched on E. and W. edges. No accessories.
- Reconstruct this cor. monument with altered reference as follows:
- Alongside old wood post, set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 31 and 32 only, with brass cap mkd.
- |            |       |
|------------|-------|
| T 6 S      | R 5 W |
| S 31       | S 32  |
| <u>S 5</u> |       |
| T 7 S      | R 5 W |
- 1933
- dig pits,
- 18x18x12 ins. one each, NE. and NW. of post, 3 ft. dist.

## Resurvey of the South Boundary of T. 6 S., R. 5 W.

BOOK 4051

Chains

Land, rolling.  
Soil, sandy and gravelly loam, 1st rate.  
Timber, scattering ironwood, mesquite and palo verde.  
Undergrowth, greasewood, scattering catclaw and cacti.

S. 89° 54' W., on true line on S. bdy, of sec. 31. (E.  $\frac{1}{2}$ )

Over rolling land, through scattering timber and dense undergrowth.

8.97 (80.00 chs. W. departure from NE. cor. of sec. 5)  
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 5 and 6 only, with brass cap mkd.

T 6 S R 5 W  
S 31

S 6 | S 5  
T 7 S R 5 W

1933

raise a mound  
of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, S. of cor.

32.60 Wash, 20 lks. wide, course N. 10° W.

39.99 The  $\frac{1}{4}$  sec. cor. of secs. 6 and 31, which is a mesquite post, 3 ins. square, projecting 10 ins. above ground, firmly set, and mkd.  $\frac{1}{4}$  S on N. face. Faint traces of pits, E. and W. This  $\frac{1}{4}$  sec. cor. is recorded as being monumented with a granite stone, mkd.  $\frac{1}{4}$  on N. face and witnessed by pits and mound of earth. As diligent search in this vicinity fails to reveal any cor. monument of this description, the mesquite post is accepted as the original cor. monument.

Reconstruct this cor. monument with altered reference as follows:

Alongside old wood post, set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with pieces of glass deposited at the base, for  $\frac{1}{4}$  sec. cor. of sec. 31 only, with brass cap mkd.

$\frac{1}{4}$  S 31

1933

raise a mound  
of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.

Thence

N. 89° 45' W., on true line on S. bdy. of sec. 31. (W.  $\frac{1}{2}$ )

Over rolling land, through scattering timber and dense undergrowth.

8.98 (40.00 chs. W. departure from NE. cor. of sec. 6)  
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with a piece of brown glass deposited at base for the  $\frac{1}{4}$  sec. cor. of sec. 6 only, with brass cap mkd.

$\frac{1}{4}$  S 6

1933

Resurvey of the South Boundary of T. 6 S., R. 5 W.

chains.

raise a mound  
of stone, 2 ft. base, 1½ ft. high, S. of cor.

24.80 Wash, 10 lks. wide, course N.20°W.

39.97 The original cor. of Tps. 6 and 7 S., Rs. 5 and 6 W.,  
which is a mesquite post, 4 ins. square, projecting  
24 ins. above ground, firmly set, marked as described  
in the official record, and witnessed by two bearing  
trees:

A mesquite, 6 ins. diam., bears N.13½°W., .162 lks. dist.  
mkd. T6S R6W S36 BT.

A mesquite, 8 ins. diam., bears N.3°E., .174 lks. dist.  
mkd. T6S R5W S31 BT.

Reconstruct this cor. monument with altered reference as  
follows:

Alongside old wood post, set an iron post, 3 ft. long, 3  
ins. diam., 28 ins. in the ground, for cor. of Tps. 6 S.,  
Rs. 5 and 6 W. only, with brass cap mkd.

T 6 S	
R 6 W   R 5 W	
S 36   S 31	
S 6	
T 7 S R 5 W	
1934	

from which

A mesquite, 18 ins. diam., bears N.68½°E., 135 lks.  
dist. mkd. T6S R5W S31 BT.

A mesquite, 10 ins. diam., bears N.17½°W., 211 lks.  
dist. mkd. T6S R6W S36 BT.

Land, rolling.  
Soil, sandy and gravelly loam; 1st rate.  
Timber, scattering ironwood, mesquite and palo verde.  
Undergrowth, greasewood, catclaw and cacti.

---

## Resurvey of the South Boundary of T. 6 S., R. 6 W.

BOOK 4057

Chains

The S. bdy. of T. 6 S., R. 6 W., was surveyed in 1892 by Lewis Wolfley, U.S.D.S., establishing cors. thereon to refer to areas on both sides of the line at 40 ch. intervals counting from the east. The recorded course and length of the line are, S.89°58'E., 477.25 chs. No retracement or resurvey of any part of this line is of record. The following notes describe a dependent resurvey of the entire line reconstructing all original cors. and altering their reference to areas N. of line only, and establishing a new set of cors. thereon to refer to areas S. of line only, at 40 ch. intervals in departure counting from the closing cor. of Ts. 7 S., Rs. 5 and 6 W.

RETRACEMENT FOR RESURVEY

- From the cor. of Ts. 6 S., Rs. 5 and 6 W.  
N.89°58'W., on a random line on S. bdy. of sec. 36. (E.½)
- 40.01 A point 90 lks. S. of the ¼ sec. cor.  
True course and dist.; N.88°41'W., 40.02 chs.  
Thence
- 40.26 N.89°58'W., on a random line on S. bdy. of sec. 36. (W.½)  
A point 7 lks. S. of the cor. of secs. 1, 2, 35 and 36.  
True course and dist.; N.89°52'W., 40.26 chs.
- 
- 40.06 N.89°58'W., on a random line on S. bdy. of sec. 35. (E.½)  
A point 10 lks. S. of the ¼ sec. cor.  
True course and dist.; N.89°50'W., 40.06 chs.  
Thence
- 39.81 N.89°58'W., on a random line on S. bdy. of sec. 35. (W.½)  
A point 29 lks. N. of the cor. of secs. 2, 3, 34 and 35.  
True course and dist.; S.89°37'W., 39.81 chs.
- 
- 40.24 N.89°58'W., on a random line on S. bdy. of sec. 34. (E.½)  
A point 16 lks. S. of the ¼ sec. cor.  
True course and dist.; N.89°45'W., 40.24 chs.  
Thence
- 39.92 N.89°58'W., on a random line on S. bdy. of sec. 34. (W.½)  
Intersect the cor. of secs. 3, 4, 33 and 34.  
True course and dist.; N.89°58'W., 39.92 chs.
- 
- 39.96 N.89°58'W., on a random line on S. bdy. of sec. 33. (E.½)  
A point 33 lks. S. of the ¼ sec. cor.  
True course and dist.; N.89°30'W., 39.96 chs.  
Thence
- 40.14 N.89°58'W., on a random line on S. bdy. of sec. 33. (W.½)  
A point 38 lks. N. of the cor. of secs. 4, 5, 32 and 33.  
True course and dist.; S.89°29'W., 40.14 chs.
- 
- 39.80 N.89°58'W., on a random line on S. bdy. of sec. 32. (E.½)  
A point 29 lks. N. of the ¼ sec. cor.  
True course and dist.; S.89°37'W., 39.80 chs.  
Thence
- 40.40 N.89°58'W., on a random line on S. bdy. of sec. 32. (W.½)  
A point 29 lks. N. of the cor. of secs. 5, 6, 31 and 32.  
True course and dist.; S.89°37'W., 40.40 chs.
- 
- 41.08 N.89°58'W., on a random line on S. bdy. of sec. 31. (E.½)  
A point 49 lks. S. of the ¼ sec. cor.  
True course and dist.; N.89°17'W., 41.08 chs.  
Thence
- 36.33 N.89°58'W., on a random line on S. bdy. of sec. 31. (W.½)  
A point 61 lks. N. of the cor. of Ts. 6 and 7 S., Rs. 6 and 7 W.  
True course and dist.; S.89°04'W., 36.34 chs.
-



## Resurvey of the South Boundary of T. 6 S., R. 6 W.

## Chains

From the cor. of Tps. 6 S., Rs. 5 and 6 W., reconstructed at original point as hereinbefore described.

N.88°41'W., on true line on S. bdy. of sec. 36. (E.  $\frac{1}{2}$ )

Over rolling land, through scattering timber and dense undergrowth.

6.80 The closing cor. of Tps. 7 S., Rs. 5 and 6 W., hereinafter described.

40.02 The  $\frac{1}{4}$  sec. cor. of secs. 1 and 36, which is a small mound of earth midway between faint traces of pits E. and W. A mesquite post, 2 ins. square, 2 ft. long, mkd.  $\frac{1}{4}$ S. is lying on the ground alongside.

Reconstruct this cor. monument with altered reference as follows:

Destroy the old mound of earth, and in center of its position, reset the old wood post, 18 ins. in the ground and alongside same, set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 36, only, with brass cap mkd.

$\frac{1}{4}$  S 36

1933

dig pits,  
18x18x12 ins. one each, E. and W. of post, 3 ft. dist.

Thence

N.89°52'W., on true line on S. bdy. of sec. 36. (W.  $\frac{1}{2}$ )

Over rolling land, through scattering timber and dense undergrowth.

6.79 (40.00 chs. W. departure from NE. cor. of sec. 1.)  
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 1 only, with brass cap mkd.

$\frac{1}{4}$  S 1

1933

dig pits,  
18x18x12 ins. one each, E. and W. of post, 3 ft. dist.

40.26 The cor. of secs. 1, 2, 35 and 26, which is a mound of earth with traces of four pits, one each NE., SE., SW. and NW. A mesquite post, 3 ins. square, 30 ins. long, mkd. as per record, is lying on the ground alongside the mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the old mound of earth, and in center of its position, reset the old wood post, 24 ins. in the ground, and alongside same, set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 35 and 36 only, with brass cap mkd.

## Resurvey of the South Boundary of T. 6 S., R. 6 W.

BOOK 4001

Chains

T 6 S R 6 W  
S 35 | S 36  
 S 1  
 T 7 S R 6 W  
 1933

18x18x12 ins. one each, NE. and NW. of post, 3 ft. dist. dig pits,

Land, rolling.  
 Soil, sandy and gravelly loam; 1st rate.  
 Timber, scattering mesquite and palo verde.  
 Undergrowth, greasewood and scattering cacti.

N. 89° 50' W., on true line on S. bdy. of sec. 35., (E. 1/2).

Over rolling land, through scattering timber and dense undergrowth.

6.53 (80.00 chs. W. departure from NE. cor. of sec. 1). Set an iron post, 3 ft. long, 3/4 ins. diam., 28 ins. in the ground, for cor. of secs. 1 and 2 only, with brass cap mkd.

T 6 S R 6 W  
S 35  
 S 2 | S 1  
 T 7 S R 6 W  
 1933

18x18x12 ins. one each SE and SW. of post, 3 ft. dist. dig pits,

40.06 The 1/4 sec. cor. of secs. 2 and 35, which is a small mound of earth midway between traces of pits E. and W. A mesquite post, 3 ins. sq. 30 ins. long, mkd. 1/4 S., is lying on the ground alongside the mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and in center of its position reset old wood post, 24 ins. in the ground, and alongside same set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor. of sec. 35 only, with brass cap mkd.

1/4 S 35  
 1933

18x18x12 ins. one each E. and W. of post, 3 ft. dist. dig pits,

Thence

S. 89° 37' W., on true line on S. bdy. of sec. 35. (W. 1/2).

Over rolling land, through scattering timber and dense undergrowth.

6.47 (40.00 chs. W. departure from NE. cor. of sec. 2.) Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor. of sec. 2 only, with brass cap mkd.

1/4 S 2  
 1933

18x18x12 ins. one each E. and W. of post, 3 ft. dist. dig pits,

15.50 Old road, bears NW. and SE.

## Chains

39.81

The cor. of secs. 2, 3, 34 and 35, which is a mound of earth with traces of four pits visible, equidistant NE., SE., SW. and NW. A mesquite post, 3 ins. sq. 30 ins. long, mkd. as per record, is lying on the ground alongside.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound of earth, and in center of its position reset old wood post, 24 ins. in the ground and alongside same, set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 34 and 35 only, with brass cap mkd.

T 6 S R 6 W
S 34   S 35
S 2
T 7 S R 6 W

1933

dig pits,

18x18x12 ins. one each NE. and NW. of post, 3 ft. dist.

Land, rolling.

Soil, sandy and gravelly loam; 1st rate.

Timber, scattering mesquite and palo verde.

Undergrowth, greasewood and scattering cacti.

N. 89° 45' W., on true line on S. bdy. of sec. 34 (E.  $\frac{1}{2}$ ).

Over rolling land, through scattering timber and dense undergrowth.

6.66

(80.00 chs. W. departure from NE. cor. of sec. 2 ) Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 2 and 3 only, with brass cap mkd.

T 6 S R 6 W
S 34
S 3   S 2
T 7 S R 6 W

1933

dig pits,

18x18x12 ins. one each, SE. and SW. of post, 3 ft. dist.

40.24

The  $\frac{1}{4}$  sec. cor. of secs. 3 and 34, which is a small mound of earth midway between faint traces of pits E. and W. A mesquite post, 2 ins. sq., 30 ins. long, mkd.  $\frac{1}{4}$  is lying on the ground alongside mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and in center of its position reset old wood post, 24 ins. in the ground, and alongside same, set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 34 only, with brass cap mkd.

$\frac{1}{4}$  S 34

1933

dig pits,

18x18x12 ins. one each, E. and W. of post, 3 ft. dist.

## Resurvey of the South Boundary of T. 6 S., R. 6 W. BOOK 4051

Chains

Thence

N.89°58'W., on true line on S. bdy. of sec. 34. (W.  $\frac{1}{2}$ )

Over rolling land, through scattering timber and dense undergrowth.

6.42

(40.00 chs. W. departure from NE. cor. of sec. 3).

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 3 only, with brass cap mkd.

S 3
-----

1933

dig pits,

18x18x12 ins. one each, E. and W. of post, 3 ft. dist.

39.92

The cor. of secs. 3, 4, 33 and 34, which is a mound of earth, with traces of four pits visible equidistant NE., SE., SW. and NW. A mesquite post, 3 ins square, 30 ins. long, mkd. as per record is lying on the ground alongside the mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and in center of its position reset old wood post, 24 ins. in the ground, and alongside same, set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 33 and 34 only, with brass cap mkd.

T 6 S	R 6 W
S 33	S 34

S 3

T 7 S R 6 W

1933

dig pits,

18x18x12 ins. one each, NE. and NW. of post, 3 ft. dist.

Land, rolling.

Soil, sandy and gravelly loam; 1st rate.

Timber, scattering mesquite and palo verde.

Undergrowth, greasewood and scattering cacti.

N.89°30'W., on true line on S. bdy. of sec. 33. (E.  $\frac{1}{2}$ )

Over rolling land, through scattering timber and dense undergrowth.

6.50

(80.00 chs. W. departure from NE. cor. of sec. 3).

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 3 and 4 only, with brass cap mkd.

T 6 S	R 6 W
S 33	

S 4 | S 3

T 7 S | R 6 W

1934

Resurvey of the South Boundary of T. 6 S., R. 6 W.

Chains

39.96

18x18x12 ins. one each, SE. and SW. of post, 3 ft. dist. dig pits,

The  $\frac{1}{4}$  sec. cor. of secs. 4 and 33, which is a mound of earth midway between faint traces of pits E. and W. A mesquite post 3 ins. square, 22 ins. long, mkd.  $\frac{1}{4}$ S. is lying on the ground alongside the mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and in center of its position reset old wood post 18 ins. in ground, and alongside same set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 33 only, with brass cap mkd.

$\frac{1}{4}$  S 33

1933

18x18x12 ins. one each, E. and W. of post, 3 ft. dist. dig pits,

Thence

S. 89° 29' W., on true line on S. bdy. of sec. 33. (W.  $\frac{1}{2}$ )

Over rolling land, through scattering timber and dense undergrowth.

6.54 (40.00 chs. W. departure from NE. cor. of sec. 4). Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 4 only, with brass cap mkd.

$\frac{1}{4}$  S 4

1933

18x18x12 ins. one each, E. and W. of post, 3 ft. dist. dig pits,

40.14 The cor. of secs. 4, 5, 32 and 33, which is a mound of earth, in center of which is the decayed remains of a mesquite post. Equidistant from this mound NE., SE., SW. and NW., are faint traces of pits.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and alongside the remains of the old wood post, set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 32 and 33 only, with brass cap mkd.

T 6 S	R 6 W
S 32	S 33
<u>S 4</u>	
T 7 S	R 6 W

1933

18x18x12 ins. one each NE. and NW. of post, 3 ft. dist. dig pits,

## Resurvey of the South Boundary of T. 6 S., R. 6 W. BOOK 4051

## Chains

Land, rolling.  
Soil, sandy and gravelly loam; 1st and 2d rates.  
Timber, scattering mesquite and palo verde.  
Undergrowth, greasewood and cacti.

S.89°37'W., on true line on S. bdy. of sec. 32. (E.  $\frac{1}{2}$ )

Over rolling land, through scattering timber and dense undergrowth.

6.40 (80.00 chs. W. departure from NE. cor. of sec. 4).  
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 4 and 5 only, with brass cap mkd.

T 6 S R 6 W

S 32

S 5 | S 4

T 7 S R 6 W

1933

dig pits,

18x18x12 ins. one each SE. and SW. of post, 3 ft. dist.

39.80 The  $\frac{1}{4}$  sec. cor. of secs. 5 and 32, which is a mound of earth midway between faint traces of pits E. and W. In center of mound is the decayed remains of a wood post, broken off below the surface of the mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and alongside remains of old wood post, set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 32 only, with brass cap mkd.

$\frac{1}{4}$  S 32

1933

dig pits,

18x18x12 ins. one each E. and W. of post, 3 ft. dist.

Thence

S.89°37'W., on true line on S. bdy. of sec. 32. (W.  $\frac{1}{2}$ )

6.60 Over rolling land, through scattering timber and dense undergrowth.

6.60 (40.00 chs. W. departure from NE. cor. of sec. 5).  
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 5 only, with brass cap mkd.

$\frac{1}{4}$  S 5

1933

dig pits,

18x18x12 ins. one each NE. and W. of post, 3 ft. dist.

## Resurvey of the South Boundary of T. 6 S., R. 6 W.

Chains

40.40 The cor. of secs. 5, 6, 31 and 32, which is a mound of earth with faint traces of pits equidistant NE., SE., SW. and NW. A mesquite post, 2 ins. square, 30 ins. long, mkd. as per record is lying on the ground alongside the mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and in center of its position reset old wood post 24 ins. in ground, and alongside same, set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 31 and 32 only, with brass cap mkd.

T 6 S	R 6 W
S 31	S 32

S 5

T 7 S R 6 W

1933

dig pits,

18x18x12 ins. one each NE. and NW. of post, 3 ft. dist.

Land, rolling.

Soil, sandy and gravelly loam; 1st rate.

Timber, scattering mesquite and palo verde.

Undergrowth, greasewood and scattering cacti.

-----

N.89°17'W., on true line on S. bdy. of sec. 31. (E.  $\frac{1}{2}$ )

Over rolling land, through scattering timber and dense undergrowth.

6.20 (80.00 chs. W. departure from NE. cor. of sec. 5).  
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 5 and 6 only, with brass cap mkd.

T 6 S	R 6 W
S 31	

S 6	S 5
T 7 S	R 6 W

1933

dig pits,

18x18x12 ins. one each SE. and SW. of post, 3 ft. dist.

41.08 The  $\frac{1}{4}$  sec. cor. of sec. 6 and 31, which is a mound of earth midway between traces of pits E. and W. A mesquite post 3 ins. square, 40 ins. long, mkd.  $\frac{1}{2}$ S. is lying on the ground alongside the mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and in center of its position reset old wood post 30 ins. in ground, and alongside same, set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 31 only, with brass cap mkd.

Resurvey of the South Boundary of T. 6 S., R. 6 W.

BOOK 4051

Chains

1/4 S 31

1933

dig pits,  
18x18x12 ins. one each E. and W. of post, 3 ft. dist.

Thence

S.89°04'W., on true line on S. bdy. of sec. 31. (W. 1/2)

Over rolling land, through scattering timber and dense undergrowth.

5.12 (40.00 chs. W. departure from NE. cor. of sec. 6).  
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor. of sec. 6 only, with brass cap mkd.

1/4 S 6


1933

dig pits,  
18x18x12 ins. one each E. and W. of post, 3 ft. dist.

36.34 The cor. of Tps. 6 and 7 S., Rs. 6 and 7 W., which is a mound of earth from which pits are visible equidistant, N., S., E. and W. A mesquite post, 4 ins. square, 44 ins. long, mkd. as per record, is lying on the ground alongside the mound.

Reconstruct this cor. monument retaining its original reference as follows:

Destroy the mound, and in center of its position reset old wood post 33 ins. in ground, and alongside same set an iron post, 3 ft. long, 3 ins. diam., 28 ins. in the ground, for cor. of Tps. 6 and 7 S., Rs. 6 and 7 W., with brass cap mkd.



1933

dig pits,  
18x18x12 ins. one each N., S., E. and W. of post,  
3 ft. dist.

Land, rolling.  
Soil, sandy and gravelly loam, 1st rate.  
Timber, scattering mesquite and palo verde.  
Undergrowth, greasewood and scattering cacti.



## Resurvey of the East Boundary of T. 7 S., R. 7 W.

Chains

The E. bdy. of T. 7 S., R. 7 W., was surveyed in 1892 by Lewis Wolfley, U.S.D.S., establishing cors. thereon to refer to areas on both sides of the line at 40 ch. intervals counting from the north. The recorded course and length of the line are, South, 480.00 chs. No retracement or resurvey of any part of this line is of record. The following notes describe a dependent resurvey of the entire line reconstructing all original cors. and altering their reference to areas W. of line only, and establishing a new set of cors. thereon to refer to areas E. of line only, at 40 ch. intervals in latitude counting from the closing cor. of Ts. 7 and 8 S., R. 6 W.

RETRACEMENT FOR RESURVEY

- From the cor. of Ts. 7 and 8 S., Rs. 6 and 7 W.,  
North, on a random line on E. bdy. of sec. 36. (S.  $\frac{1}{2}$ )
- 40.32 A point 13 lks. E. of the  $\frac{1}{4}$  sec. cor.  
True course and dist.; N.0°11'W., 40.32 chs.  
Thence
- 39.78 North, on a random line on E. bdy. of sec. 36. (N.  $\frac{1}{2}$ )  
A point, 30 lks. W. of the cor. of secs. 25, 30, 31 and 36.  
True course and dist.; N.0°26'E., 39.78 chs.
- 
- 39.99 North, on a random line on E. bdy. of sec. 25. (S.  $\frac{1}{2}$ )  
A point 24 lks. W. of the  $\frac{1}{4}$  sec. cor.  
True course and dist.; N.0°21'E., 39.99 chs.  
Thence
- 40.10 North, on a random line on E. bdy. of sec. 25. (N.  $\frac{1}{2}$ )  
A point 8 lks. W. of the cor. of secs. 19, 24, 25 and 30.  
True course and dist.; N.0°07'E., 40.10 chs.
- 
- 40.04 North, on a random line on E. bdy. of sec. 24. (S.  $\frac{1}{2}$ )  
A point 33 lks. W. of the  $\frac{1}{4}$  sec. cor.  
True course and dist.; N.0°28'E., 40.04 chs.  
Thence
- 40.85 North, on a random line on E. bdy. of sec. 24. (N.  $\frac{1}{2}$ )  
A point 65 lks. E. of the cor. of secs. 13, 18, 19 and 24.  
True course and dist.; N.0°55'W., 40.86 chs.
- 
- 39.31 North, on a random line on E. bdy. of sec. 13. (S.  $\frac{1}{2}$ )  
A point 59 lks. W. of the  $\frac{1}{4}$  sec. cor.  
True course and dist.; N.0°51'E., 39.31 chs.  
Thence
- 40.05 North, on a random line on E. bdy. of sec. 13. (N.  $\frac{1}{2}$ )  
A point 44 lks. E. of the cor. of secs. 7, 12, 13 and 18.  
True course and dist.; N.0°38'W., 40.05 chs.
- 
- 39.95 North, on a random line on E. bdy. of sec. 12. (S.  $\frac{1}{2}$ )  
A point 20 lks. W. of the  $\frac{1}{4}$  sec. cor.  
True course and dist.; N.0°17'E., 39.95 chs.  
Thence
- 40.03 North, on a random line on E. bdy. of sec. 12. (N.  $\frac{1}{2}$ )  
A point 7 lks. W. of the cor. of secs. 1, 6, 7 and 12.  
True course and dist.; N.0°06'E., 40.03 chs.
- 
- 40.45 North, on a random line on E. bdy. of sec. 1. (S.  $\frac{1}{2}$ )  
A point 13 lks. W. of the  $\frac{1}{4}$  sec. cor.  
True course and dist.; N.0°11'E., 40.45 chs.  
Thence
- 39.68 North, on a random line on E. bdy. of sec. 1. (N.  $\frac{1}{2}$ )  
A point 52 lks. E. of the cor. of Ts. 6 and 7 S., Rs.  
6 and 7 W.  
True course and dist.; N.0°45'W., 39.68 chs.

## Resurvey of the East Boundary of T. 7 S., R. 7 W.

BOOK 4051

## Chains

The cor. of Tps. 7 and 8 S., Rs. 6 and 7 W., is a mesquite post, 3 ins. square, projecting 36 ins. above ground, firmly set, marked and witnessed as described in the official record.

Reconstruct this cor. monument with altered reference as follows:

Alongside old wood post, set an iron post 3 ft. long, 3 ins. diam., 28 ins. in the ground, for cor. of T. 7 S., R. 7 W. only (SE. cor), with brass cap mkd.

T 7 S	
R 7 W	
S 36	T 8 S
	R 6 W
	S 6

1934

18x18x12 ins. one each N. and W. of post, 3 ft. dist.,<sup>dig pits,</sup>  
and fill old pits N., S., E. and W. of cor.

Thence

N.0°11'W., on true line on E. bdy. of sec. 36. (S.½)

Over rolling land, through scattering timber and dense undergrowth.

4.58 The closing cor. of Tps. 7 and 8 S., R. 6 W., hereinafter described.

40.32 The ¼ sec. cor. of secs. 31 and 36, which is a mound of earth midway between pits N. and S. A mesquite post, 3 ins. square, 30 ins. long, mkd. #S. is lying on the ground alongside the mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and in center of its position reset old wood post 24 ins. in the ground, and alongside same set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for ¼ sec. cor. of sec. 36 only, with brass cap mkd.

4.836	
-------	--

1934

18x18x12 ins. one each N. and S. of post, 3 ft. dist.<sup>dig pits,</sup>

Thence

N.0°26'E., on true line on E. bdy. of sec. 36. (N.½)

Over rolling land, through scattering timber and dense undergrowth.

4.26 (40.00 chs. N. latitude from SW. cor. of sec. 31).  
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for ¼ sec. cor. of sec. 31, only, with brass cap mkd.

## Resurvey of the East Boundary of T. 7 S., R. 7 W.

Chains

1/4 S 31
----------

1934

dig pits,

18x18x12 ins. one each N. and S. of post, 3 ft. dist.

39.78 The cor. of secs. 25, 30, 31 and 36, which is a mound of earth from which pits are visible equidistant NE., SE., SW. and NW. A mesquite post, 3 ins. square, 30 ins. long, mkd. are per record is lying on the ground alongside the mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and in the center of its position reset old wood post 24 ins. in the ground and alongside same, set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 25 and 36 only, with brass cap mkd.

T 7 S
-------

S 25
------

S 36
------

R 7 W
-------

1934

dig pits,

18x18x12 ins. one each NW. and SW. of post, 3 ft. dist.

Land, rolling.

Soil, sandy and gravelly loam; 1st rate.

Timber, scattering ironwood and palo verde.

Undergrowth, greasewood.

N. 0° 21' E., on true line on E. bdy. of sec. 25. (S. 1/4)

Over rolling land, through scattering timber and dense undergrowth.

4.48 (80.00 chs. N. latitude from SW. cor. of sec. 31).  
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 30 and 31 only, with brass cap mkd.

T 7 S
-------

S 30
------

S 31
------

R 6 W
-------

1934

raise a mound

of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

39.99 The 1/4 sec. cor. of secs. 25 and 30, which is a mesquite post, 2 ins. square, projecting 22 ins. above ground, mkd. 1/4 on W. face, firmly set in ground and mound of stone.

Reconstruct this cor. monument with altered reference as follows:

## Resurvey of the East Boundary of T. 7 S., R. 7 W. BOOK 4051

## Chains

Alongside old wood post, set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bedrock and in a mound of stone to top, with a lava stone, 4x4x4 ins. mkd. (+) deposited at the base, for  $\frac{1}{4}$  sec. cor. of sec. 25 only, with brass cap mkd.

$\frac{1}{4}$  S25

1934

Thence

N.0°07'E., on true line on E. bdy. of sec. 25. (N. $\frac{1}{2}$ )

Over rolling land, through scattering timber and dense undergrowth.

- 4.49 (40.00 chs. N. latitude from SW. cor. of sec. 30).  
Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bedrock and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor. of sec. 30 only, with brass cap mkd.

$\frac{1}{4}$  S30

1934

dig pits,

18x18x12 ins. one each N. and S. of post, 3 ft. dist.

- 40.10 The cor. of secs. 19, 24, 25 and 30, which is a mound of earth with traces of pits equidistant NE., SE., SW. and NW. A mesquite post, 2 ins. square, 36 ins. long, mkd. as per record is lying on the ground alongside the mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and in center of its position reset old wood post 30 ins. in ground and alongside same, set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 24 and 25 only, with brass cap mkd.

T 7 S

S 24

S 25

R 7 W

1934

dig pits,

18x18x12 ins. one each NW. and SW. of post, 3 ft. dist.

Land, rolling.

Soil, sandy and gravelly loam; stony; 2d rate.

Timber, scattering mesquite and palo verde.

Undergrowth, greasewood and scattering cacti.

Resurvey of the East Boundary of T. 7 S., R. 7 W.


Chains

N. 0° 28' E., on true line on E. bdy. of sec. 24. (S. 1/2)

Over rolling land, through scattering timber and dense undergrowth.

4.39

(80.00 chs. N. latitude from SW. cor. of sec. 30)  
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 19 and 30 only, with brass cap mkd.



1934


raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

40.04

The 1/2 sec. cor. of secs. 19 and 24, which is a mound of earth midway between traces of pits N. and S. A mesquite post, 2 ins. square, 30 ins. long, mkd. 1/4 S is lying on the ground alongside the mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and in center of its position reset old wood post 24 ins. in ground, and alongside same, set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/2 sec. cor. of sec. 24 only, with brass cap mkd.



1934

dig pits, 18x18x12 ins. one each N. and S. of post, 3 ft. dist.


Thence

N. 0° 55' W.; on true line on E. bdy. of sec. 24 (N. 1/2)

Over rolling land, through scattering timber and dense undergrowth.

4.35

(40.00 chs. N. latitude from SW. cor. of sec. 19)  
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor. of sec. 19 only, with brass cap mkd.



1934

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

40.86

The cor. of secs. 13, 18, 19 and 24, which is a mound of earth with traces of pits equidistant NE., SE., SW. and NW. A mesquite post, 2 ins. square, 30 ins. long mkd.

## Resurvey of the East Boundary of T. 7 S., R. 7 W.

BOOK 4051

## Chains

as per record is lying on the ground alongside the mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and in center of its position reset old wood post, 30 ins. in ground and alongside same, set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 13 and 24 only, with brass cap mkd.

T 7 S
S 13
S 24
R 7 W

1934

dig pits,  
18x18x12 ins. one each NW. and SW. of post, 3 ft. dist.

Land, rolling.

Soil, sandy and greavelly loam; 1st and 2d rates.

Timber, scattering mesquite and palo verde.

Undergrowth, greasewood.

N.0°51'E., on true line on E. bdy. of sec. 13. (S.  $\frac{1}{2}$ )

Over rolling land, through scattering timber and dense undergrowth.

3.49 (80.00 chs. N. latitude from SW. cor. of sec. 19)  
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 18 and 19 only, with brass cap mkd.

T 7 S
S 18
S 19
R 6 W

1934

dig pits,  
18x18x12 ins. one each NE. and SE. of post, 3 ft. dist.

39.31 The  $\frac{1}{4}$  sec. cor. of secs. 13 and 18, which is a mound of earth midway between traces of pits N. and S. A mesquite post, 2 ins. square, 30 ins long, mkd.  $\frac{1}{4}$ S is lying on the ground alongside the mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and in center of its position reset old wood post 24 ins. in ground, and alongside same, set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 13 only, with brass cap mkd.

Resurvey of the East Boundary of T. 7 S., R. 7 W.

Chains

1/4 S13

1934

dig pits,  
18x18x12 ins. one each N. and S. of post, 3 ft. dist.

Thence

N.0°38'W., on true line on E. bdy. of sec. 13. (N. 1/2)

Over rolling land, through scattering timber and dense undergrowth.

4.18

(40.00 chs. N. latitude from SW. cor. of sec. 18).  
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor. of sec. 18 only, with brass cap mkd.

1/4 S18

1934

dig pits,  
18x18x12 ins. one each N. and S. of post, 3 ft. dist.

40.05

The cor. of secs. 7, 12, 13 and 18, which is a mound of earth with traces of pits equidistant NE., SE., SW. and NW. A mesquite post, 3 ins. square, 40 ins. long, mkd. as per record, is lying on the ground alongside the mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and in center of its position, reset old wood post 34 ins. in ground, and alongside same, set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 12 and 13 only, with brass cap mkd.

T 7 S

S 12

S 13

R 7 W

1934

dig pits,  
18x18x12 ins. one each NW. and SW. of post, 3 ft. dist.

Land, rolling.  
Soil, sandy and gravelly loam; 1st rate.  
Timber, scattering mesquite and palo verde.  
Undergrowth, greasewood and scattering cacti.

N.0°17'E., on true line on E. bdy. of sec. 12. (S. 1/2)

Over rolling land, through scattering timber and dense undergrowth.

## Resurvey of the East Boundary of T. 7 S., R. 7 W. BOOK 4051

## Chains

- 4.13 (80.00 chs. N. latitude from SW. cor. of sec. 18)  
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with a glass bottle deposited at the base, for cor. of secs. 7 and 18 only, with brass cap mkd.

T	7	S
S	7	
S	18	
R	6	W

1934

dig pits,

18x18x12 ins. one each NE. and SE. of post, 3 ft. dist.

- 39.95 The  $\frac{1}{4}$  sec. cor. of secs. 7 and 12, which is a mound of earth midway between traces of pits N. and S. A mesquite post, 2 ins. square, 30 ins. long, mkd.  $\frac{1}{4}$ S is lying on the ground alongside the mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and in center of its position, reset old wood post 24 ins. in ground, and alongside same, set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 12 only, with brass cap mkd.

$\frac{1}{4}$	S12	
---------------	-----	--

1934

dig pits,

18x18x12 ins. one each N. and S. of post, 3 ft. dist.

Thence

N.0°06'E., on true line on E. bdy. of sec. 12. (N. $\frac{1}{2}$ )

Over rolling land, through scattering timber and dense undergrowth.

- 4.18. (40.00 chs. N. latitude from SW. cor. of sec. 7).  
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 7 only, with brass cap mkd.

$\frac{1}{4}$	S7	
---------------	----	--

1934

dig pits,

18x18x12 ins. one each N. and S. of post, 3 ft. dist.

- 40.03 The cor. of secs. 1, 6, 7 and 12, which is a mound of earth with traces of pits equidistant NE., SE., SW. and NW. A mesquite post, 2 ins. square, 30 ins. long, mkd. as per record, is lying on the ground alongside the mound.

Reconstruct this cor. monument with altered reference as follows:



Resurvey of the East Boundary of T. 7 S., R. 7 W.

Chains

Destroy the mound, and in center of its position, reset old wood post 24 ins. in ground, and alongside same, set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 1 and 12 only, with brass cap mkd.

T 7 S
S 1
S 12
R 7 W

1934

dig pits,  
18x18x12 ins. one each NW. and SW. of post, 3 ft. dist.

Land, rolling.  
Soil, sandy and gravelly loam, 1st rate.  
Timber, scattering mesquite and palo verde.  
Undergrowth, greasewood and scattering cacti.

N.0°11'E., on true line on E. bdy. of sec. 1. (S.  $\frac{1}{2}$ )

Over rolling land, through scattering timber and dense undergrowth.

4.15 (80.00 chs. N. latitude from SW. cor. of sec. 7).  
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 6 and 7 only, with brass cap mkd.

T 7 S
S 6
S 7
R 6 W

1934

dig pits,  
18x18x12 ins. one each NE. and SE. of post, 3 ft. dist.

40.45 The  $\frac{1}{4}$  sec. cor. of secs. 1 and 6, which is a mound of earth midway between traces of pits N. and S. A mesquite post, 2 ins. square, 36 ins. long, mkd.  $\frac{1}{4}$  is lying on the ground alongside the mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and in center of its position, reset old wood post 30 ins in ground, and alongside same, set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 1 only, with brass cap mkd.

$\frac{1}{4}$ S 1
-------------------

1934

dig pits,  
18x18x12 ins. one each N. and S. of post, 3 ft. dist.

Thence

Resurvey of the East Boundary of T. 7 S., R. 7 W. BOOK 4051

Chains

N. 0° 45' W., on true line on E. bdy. of sec. 1. (N. 1/2)

Over rolling land, through scattering timber and dense undergrowth.

3.70

(40.00 chs. N. latitude from SW. cor. of sec. 6)  
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor. of sec. 6 only, with brass cap mkd.

1/4 S 6

1934

dig pits,  
18x18x12 ins. one each N. and S. of post, 3 ft. dist.

39.68

The cor. of Tps. 6 and 7 S., Rs. 6 and 7 W., reconstructed at original point as hereinbefore described.

Land, rolling.  
Soil, sandy and gravelly loam; 1st rate.  
Timber, scattering mesquite and palo verde.  
Undergrowth, greasewood and scattering cacti.

## Resurvey of the South Boundary of T. 7 S., R. 7 W.

## Chains

The S. bdy. of T. 7 S., R. 7 W., was surveyed in 1892 by Lewis Wolfley, U.S.D.S., establishing cors. thereon to refer to areas on both sides of the line at 40 ch. intervals counting from the east. The recorded course and length of the line are, S.89°59'E., 477.30 chs. No retracement or resurvey of any part of this line is of record. The following notes describe a dependent resurvey of the entire line reconstructing all original cors. and altering their reference to areas N. of line only, and establishing a new set of cors. thereon to refer to areas S. of line only, at 40 ch. intervals in departure counting from the closing cor. of Ts. 8 S., Rs. 6 and 7 W.

RETRACEMENT FOR RESURVEY

- From the cor. of T. 7 S., R. 7 W., only (SE. cor).  
N.89°59'W., on random line on S. bdy. of sec. 36. (E.  $\frac{1}{4}$ )
- 41.22 A point 18 lks. S. of the  $\frac{1}{4}$  sec. cor.  
True course and dist.; N.89°44'W., 41.22 chs.  
Thence
- 39.03 N.89°59'W., on random line on S. bdy. of sec. 36. (W.  $\frac{1}{4}$ )  
A point 10 lks. N. of the cor. of secs. 1, 2, 35 and 36.  
True course and dist.; S.89°52'W., 39.03 chs.
- 
- 39.97 N.89°59'W., on random line on S. bdy. of sec. 35. (E.  $\frac{1}{4}$ )  
A point 38 lks. S. of the  $\frac{1}{4}$  sec. cor.  
True course and dist.; N.89°26'W., 39.97 chs.  
Thence
- 40.09 N.89°59'W., on random line on S. bdy. of sec. 35. (W.  $\frac{1}{4}$ )  
A point 18 lks. N. of the cor. of secs. 2, 3, 34 and 35.  
True course and dist.; S.89°46'W., 40.09 chs.
- 
- 40.12 N.89°59'W., on random line on S. bdy. of sec. 34. (E.  $\frac{1}{4}$ )  
A point 4 lks. N. of the  $\frac{1}{4}$  sec. cor.  
True course and dist.; S.89°58'W., 40.12 chs.  
Thence
- 39.92 N.89°59'W., on random line on S. bdy. of sec. 34. (W.  $\frac{1}{4}$ )  
A point 13 lks. S. of the cor. of secs. 3, 4, 33 and 34.  
True course and dist.; N.89°48'W., 39.92 chs.
- 
- 40.12 N.89°59'W., on random line on S. bdy. of sec. 33. (E.  $\frac{1}{4}$ )  
A point 14 lks. S. of the  $\frac{1}{4}$  sec. cor.  
True course and dist.; N.89°47'W., 40.12 chs.  
Thence
- 39.92 N.89°59'W., on random line on S. bdy. of sec. 33. (W.  $\frac{1}{4}$ )  
Intersect the cor. of secs. 4, 5, 32 and 33.  
True course and dist.; N.89°59'W., 39.92 chs.
- 
- 40.01 N.89°59'W., on random line on S. bdy. of sec. 32. (E.  $\frac{1}{4}$ )  
A point 21 lks. S. of the  $\frac{1}{4}$  sec. cor.  
True course and dist.; N.89°41'W., 40.01 chs.  
Thence
- 40.01 N.89°59'W., on random line on S. bdy. of sec. 32. (W.  $\frac{1}{4}$ )  
A point 18 lks. S. of the cor. of secs. 5, 6, 31 and 32.  
True course and dist.; N.89°44'W., 40.01 chs.
- 
- 40.01 N.89°59'W., on random line on S. bdy. of sec. 31. (E.  $\frac{1}{4}$ )  
A point 19 lks. S. of the  $\frac{1}{4}$  sec. cor.  
True course and dist.; N.89°43'W., 40.01 chs.  
Thence
- 37.19 N.89°59'W., on random line on S. bdy. of sec. 31. (W.  $\frac{1}{4}$ )  
A point 20 lks. S. of the cor. of Tps. 8 S., Rs. 7 and 8 W.  
True course and dist.; N.89°42'W., 37.19 chs.
-

## Resurvey of the South Boundary of T. 7 S., R. 7 W.

BOOK 4051

## Chains

From the cor. of T. 7 S., R. 7 W., only (SE. cor) hereinbefore described.

Thence

N.89°44'W., on true line on S. bdy. of sec. 36. (E.  $\frac{1}{2}$ )

Over rolling land, through scattering timber and dense undergrowth.

7.37 The closing cor. of Tps. 8 S., Rs. 6 and 7 W., hereinafter described.

41.22 The  $\frac{1}{4}$  sec. cor. of secs. 1 and 36, which is a mound of earth midway between traces of pits E. and W. A mesquite post, 2 ins. square, 36 ins. long, mkd.  $\frac{1}{4}$ S is lying on the ground alongside the mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and in center of its position reset old wood post 30 ins. in ground, and alongside same, set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 36 only, with brass cap mkd.

$\frac{1}{4}$  S 36

1934

dig pits,

18x18x12 ins. one each E. and W. of post, 3 ft. dist.

30.73 Thence

S.89°52'W., on true line on S. bdy. of sec. 36. (W.  $\frac{1}{2}$ )

Over rolling land, through scattering timber and dense undergrowth.

6.15 (40.00 chs. W. departure from NE. cor. of sec. 1)  
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 1 only, with brass cap mkd.

$\frac{1}{4}$  S 1

1934

dig pits,

18x18x12 ins. one each E. and W. of post, 3 ft. dist.

39.03 The cor. of secs. 1, 2, 35 and 36, which is a mound of earth with traces of pits equidistant NE., SE., SW. and NW. A mesquite post, 3 ins. square 30 ins. long, marked as per record is lying on the ground alongside the mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and in center of its position reset old wood post 24 ins. in ground, and alongside same, set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 35 and 36 only, with brass cap mkd.

## Resurvey of the South Boundary of T. 7 S., R. 7 W.

Chains

T 7 S	R 7 W
S 35	S 36

1934

dig pits,  
18x18x12 ins. one each NE. and NW. of post, 3 ft. dist.

Land, rolling.  
Soil, sandy and gravelly; 12d. rate.  
Timber, scattering mesquite and palo verde.  
Undergrowth, greasewood and cacti.

N. 89° 26' W., on true line on S. bdy. of sec. 35. (E.  $\frac{1}{2}$ )

Over rolling land, through scattering timber and dense undergrowth.

7.12 (80.00 chs. W. departure from NE. cor. of sec. 1)  
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of Secs. 1 and 2 only, with brass cap mkd.

T 7 S	R 7 W
S 35	

S 2	S 1
T 8 S	R 7 W

1934

dig pits,  
18x18x12 ins. one each SE. and SW. of post, 3 ft. dist.

39.97 The  $\frac{1}{4}$  sec. cor. of secs. 2 and 35, which is a mound of earth midway between traces of pits E. and W. A mesquite post, 2 ins. square, 36 ins. long, mkd.  $\frac{1}{2}$  S is lying on the ground alongside the mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and in center of its position reset old wood post 30 ins in ground, and alongside same, set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 35 only, with brass cap mkd.

$\frac{1}{4}$ S	35
-----------------	----

1934

dig pits,  
18x18x12 ins. one each E. and W. of post, 3 ft. dist.

Thence

S. 89° 46' W., on true line on S. bdy. of sec. 35. (W.  $\frac{1}{2}$ )

Over rolling land, through scattering timber and dense undergrowth.

7.15 (40.00 chs. W. departure from NE. cor. of sec. 2)  
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 2 only, with brass cap mkd.

## Resurvey of the South Boundary of T. 7 S., R. 7 W.

BOOK 4051

Chains

 $\frac{1}{4}$  S 2

1934

dig pits,

18x18x12 ins. one each E. and W. of post, 3 ft. dist.

40.09 The cor. of secs. 2, 3, 34 and 35, which is a mound of earth with traces of pits equidistant NE., SE., SW. and NW. A mesquite post, 3 ins. square, 36 ins. long, mkd. as per record is lying on the ground alongside the mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and in center of its position reset old wood post 30 ins. in the ground, and alongside same, set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 34 and 35 only, with brass cap mkd.

T 7 S	R 7 W
S 34	S 35

1934

dig pits,

18x18x12 ins. one each NE. and NW. of post, 3 ft. dist.

Land, rolling.

Soil, sandy and gravelly loam, 1st rate.

Timber, scattering mesquite and palo verde.

Undergrowth, greasewood and scattering cacti.

S. 89°58'W., on true line on S. bdy. of sec. 34. (E.  $\frac{1}{2}$ )

Over rolling land, through scattering timber and dense undergrowth.

7.06 (80.00 chs. W. departure from NE. cor. of sec. 2)  
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 2 and 3 only, with brass cap mkd.

T 7 S	R 7 W
S 34	

S 3	S 2
T 8 S	R 7 W

1934

dig pits,

18x18x12 ins. one each SE. and SW. of post, 3 ft. dist.

40.12 The  $\frac{1}{4}$  sec. cor. of secs. 3 and 34, which is a mound of earth midway between traces of pits E. and W. A mesquite post, 2 ins. square, 30 ins. long, mkd.  $\frac{1}{4}$ S is lying on the ground alongside the mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and in center of its position reset

## Resurvey of the South Boundary of T. 7 S., R. 7 W.

Chains

old wood post 24 ins. in ground and alongside same, set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 34 only, with brass cap mkd.

$\frac{1}{4}$  S 34

1934

dig pits,  
18x18x12 ins. one each E. and W. of post, 3 ft. dist.

Thence

N.89°48'W., on true line on S. bdy. of sec. 34. (W. $\frac{1}{2}$ )

Over rolling land, through scattering timber and dense undergrowth.

6.94

(40.00 chs. W. departure from NE. cor. of sec. 3) Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 3 only, with brass cap mkd.

$\frac{1}{4}$  S 3

1934

dig pits,  
18x18x12 ins. one each E. and W. of post, 3 ft. dist.

39.92

The cor. of secs. 3, 4, 33 and 34, which is a mound of earth with traces of pits equidistant NE., SE., SW. and NW. A mesquite post, 3 ins. square, 30 ins. long, mkd. as per record, is lying on the ground alongside the mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and in center of its position reset old wood post 24 ins. in ground, and alongside same, set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 33 and 34 only, with brass cap mkd.

T 7 S | R 7 W  
S 33 | S 34

1934

dig pits,  
18x18x12 ins. one each NE. and NW. of post, 3 ft. dist.

Land, rolling.

Soil, sandy and gravelly loam; 1st rate.

Timber, scattering mesquite and palo verde.

Undergrowth, greasewood and scattering cacti.

N.89°47'W., on true line on S. bdy. of sec. 33. (E. $\frac{1}{2}$ )

Over rolling land, through scattering timber and dense undergrowth.

## Resurvey of the South Boundary of T. 7 S., R. 7 W.

BOOK 4051

## Chains

7.02 (80.00 chs. W. departure from NE. cor. of sec. 3)  
Set an iron post, 3 ft. long 2 ins. diam., 28 ins. in the ground, for cor. of secs. 3 and 4 only, with brass cap mkd.

T 7 S	R 7 W
S 33	
S 4	S 3
T 8 S	R 7 W

1934

dig pits,

18x18x12 ins. one each SE. and SW. of post, 3 ft. dist.

40.12 The  $\frac{1}{4}$  sec. cor. of secs. 4 and 33, which is a mound of earth midway between traces of pits E. and W. A mesquite post, 2 ins. square, 30 ins. long, mkd.  $\frac{1}{4}$ S is lying on the ground alongside the mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and in center of its position reset old wood post 24 ins. in ground, and alongside same, set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 33 only, with brass cap mkd.

$\frac{1}{4}$  S 33

1934

dig pits,

18x18x12 ins. one each E. and W. of post, 3 ft. dist.

Thence

N.89°59'W., on true line on S. bdy. of sec. 33. (W. $\frac{1}{2}$ )

Over rolling land, through scattering timber and dense undergrowth.

6.90 (40.00 chs. W. departure from NE. cor. of sec. 4)  
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 4 only, with brass cap mkd.

$\frac{1}{4}$  S 4

1934

dig pits,

18x18x12 ins. one each E. and W. of post, 3 ft. dist.

39.92 The cor. of secs. 4, 5, 32 and 33, which is a mound of earth with traces of pits equidistant NE., SE., SW. and NW. A mesquite post, 3 ins. square, 36 ins. long, mkd. as per record is lying on the ground alongside the mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and in center of its position reset



## Resurvey of the South Boundary of T. 7 S., R. 7 W.

Chains

old wood post 30 ins. in ground and alongside same, set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 32 and 33 only, with brass cap mkd.

T 7 S	R 7 W
S 32	S 33

1934

dig pits,

18x18x12 ins. one each NE. and NW. of post, 3 ft. dist.

Land, rolling.

Soil, sandy and gravelly loam; 1st rate.

Timber, scattering mesquite and palo verde.

Undergrowth, greasewood and scattering cacti.

N.89°41'W., on true line on S. bdy. of sec. 32. (E.  $\frac{1}{4}$ )

Over rolling land, through scattering timber and dense undergrowth.

6.98

(80.00 chs. W. departure from NE. cor. of sec. 4)  
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 4 and 5 only, with brass cap mkd.

T 7 S	R 7 W
S 32	
S 5	S 4
T 8 S	R 7 W

1934

dig pits,

18x18x12 ins. one each SE. and SW. of post, 3 ft. dist.

40.01

The  $\frac{1}{4}$  sec. cor. of secs. 5 and 32, which is a mound of earth midway between traces of pits E. and W. A decayed fragment of wood post unmarked is lying alongside mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and in center of its position, set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 32 only, with brass cap mkd.

$\frac{1}{4}$ S	32
-----------------	----

1934

dig pits,

18x18x12 ins. one each E. and W. of post, 3 ft. dist.

Thence

N.89°44'W., on true line on S. bdy. of sec. 32. (W.  $\frac{1}{4}$ )

Over rolling land, through scattering timber and dense undergrowth.

## Resurvey of the South Boundary of T. 7 S., R. 7 W. BOOK 4051

## Chains

6.97

(40.00 chs. W. departure from NE. cor. of sec. 5)  
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 5 only, with brass cap mkd.

$\frac{1}{4}$ S 5
-------------------

1934

dig pits,

18x18x12 ins. one each E. and W. of post, 3 ft. dist.

40.01

The cor. of secs. 5, 6, 31 and 32, which is a mound of earth with traces of pits equidistant NE., SE., SW. and NW. A mesquite post, 3 ins. square, 36 ins. long, mkd. as per record is lying on the ground alongside the mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound; and in center of its position reset old wood post 30 ins. in ground, and alongside same, set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 31 and 32 only, with brass cap mkd.

T 7 S	R 7 W
S 31	S 32

1934

dig pits,

18x18x12 ins. one each NE. and NW. of post, 3 ft. dist.

Land, rolling.

Soil, sandy and gravelly loam; 1st rate.

Timber, scattering mesquite and palo verde.

Undergrowth, greasewood and scattering cacti.

N.89°43'W., on true line on S. bdy, of sec. 31. (E.  $\frac{1}{2}$ )

Over rolling land, through scattering timber and dense undergrowth.

6.96

(80.00 chs. W. departure from NE. cor. of sec. 5)  
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 5 and 6 only, with brass cap mkd.

T 7 S	R 7 W
S 31	

S 6	S 5
T 8 S	R 7 W

1934

dig pits,

18x18x12 ins. one each SE. and SW. of post, 3 ft. dist.

40.01

The  $\frac{1}{4}$  sec. cor. of secs. 6 and 31, which is a mound of

## Resurvey of the South Boundary of T. 7 S., R. 7 W.

Chains

earth midway between traces of pits E. and W. A mesquite post 3 ins. square, 36 ins. long, mkd. 18 is lying on the ground alongside the mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and in center of its position, reset old wood post 30 ins. in ground, and alongside same, set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 31 only, with brass cap mkd.

$\frac{1}{4}$  S 31

1934

dig pits,  
18x18x12 ins. one each E. and W. of post, 3 ft. dist.

Thence

N. 89° 42' W., on true line on S. bdy. of sec. 31. (W.  $\frac{1}{2}$ )

Over rolling land, through scattering timber and dense undergrowth.

6.95 (40.00 chs. W. departure from NE. cor. of sec. 6)  
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 6 only, with brass cap mkd.

$\frac{1}{4}$  S 6

1934

dig pits,  
18x18x12 ins. one each E. and W. of post, 3 ft. dist.

37.19 The cor. of Tps. 7 and 8 S., Rs. 7 and 8 W., which is a mound of earth with traces of pits equidistant N., S., E. and W. A mesquite post, 3 ins. square, 36 ins. long, mkd. and notched as per record, is lying on the ground alongside the mound.

Reconstruct this cor. monument with altered reference as follows:

Destroy the mound, and in center of its position, reset old wood post 30 ins. in ground, and alongside same, set an iron post, 3 ft. long, 3 ins. diam., 28 ins. in the ground, for cor. of Tps. 7 S., Rs. 7 and 8 W. only, with brass cap mkd.

T 7 S	
R 8 W	R 7 W
S 36	S 31
-----	
S 6	

T 8 S R 7 W

1934

dig pits,  
18x18x12 ins. one each N., E., and W. of post, 3 ft. dist.

Resurvey of the South Boundary of T. 7 S., R. 7 W.

BOOK 4051

Chains

Land, rolling.  
 Soil, sandy and gravelly loam; 1st rate.  
 Timber, scattering mesquite and palo verde.  
 Undergrowth, greasewood and scattering cacti.

---

## Resurvey of Part of the South Boundary of T. 7 S., R. 8 W.

## Chains

The South boundary of T. 7 S., R. 8 W., was surveyed in 1892 by Lewis Wolfley, U.S.D.S., establishing cors. thereon to refer to areas on both sides of the line at 40 ch. intervals counting from the east. The recorded course and length of the line are, S.89°58'E., 477.50 chs. No re-tracement or resurvey of any part of this Tp. bdy. is of record.

The following notes describe a resurvey of the east half of the south bdy. of section 36, T. 7 S., R. 8 W., in which the original  $\frac{1}{4}$  sec. cor. of secs. 1 and 36 is reconstructed and altered to refer to the quarters of section 36 only.

The remainder of this Tp. bdy. is resurveyed under current Group No. 200, reconstructing all original corners thereon with altered reference to areas N. of line only, and establishing a new set of cors. thereon to refer to areas S. of line only, at 40 ch. intervals in departure, counting from the closing cor. of Ts. 8 S., Rs. 7 and 8 W., said resurvey being described in the field notes of resurvey and survey of Tp. Exteriors of said Group 200.

-----  
 RETRACEMENT FOR RESURVEY

39.97 From the cor. of Ts. 7 S., Rs. 7 and 8 W., N.89°58'W., on random line, on S. bdy. of sec. 36. (E.  $\frac{1}{4}$ )  
 A point 2 lks. N. of the  $\frac{1}{4}$  sec. cor.  
 True course and dist.; West, 39.97 chs.

-----  
 RESURVEY

From the cor. of Ts. 7 S., Rs. 7 and 8 W., reconstructed at original point as hereinbefore described.

West, on true line on S. bdy. of sec. 36. (E.  $\frac{1}{4}$ )

Over rolling land, through scattering timber and undergrowth.

8.43 The closing cor. of Ts. 8 S., Rs. 7 and 8 W., hereinafter described.

39.97 The  $\frac{1}{4}$  sec. cor. of secs. 1 and 36, which is a mesquite post, 3 ins. square, projecting 24 ins. above ground, mkd.  $\frac{1}{4}$ S on N. face, firmly set in ground and in mound of earth. Traces of pits E. and W.

Reconstruct this cor. monument with altered reference as follows:

Alongside old wood post, set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 36 only, with brass cap mkd.

$\frac{1}{4}$  S 36

1934

18x18x12 ins. one each E. and W. of post, 3 ft. dist. dig pits,

Land, rolling.

Soil, sandy and gravelly loam, 1st rate.

Timber, mesquite and palo verde.

Undergrowth, greasewood and scattering cacti.

-----

Survey of West Boundary of T. 9 S., R. 5 W.

BOOK 4051

Chains

From the standard cor. of Tps. 9 S., Rs. 5 and 6 W., described in the field notes of the independent resurvey of the 2nd Standard Parallel South, through Rs. 5, 6, and 7 W., executed under this group.


North, bet. secs. 31 and 36.

Over gently rolling land; through scattering timber and dense undergrowth.

6.50 Wash, 110 lks. wide, course SW.

21.00 Wash, 140 lks. wide, course W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.




1934

raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

57.50 Wash, 30 lks. wide, course W.

64.00 Wash, 40 lks. wide, course W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 25, 30, 31 and 36, with brass cap mkd.



1934

raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

Land, gently rolling.  
Soil, sandy and rocky; 2d and 3d rates.  
Timber, scattering mesquite, ironwood and palo verde.  
Undergrowth, greasewood, ocotillo, catclaw and cactus.


North, bet. secs. 25 and 30.

Over gently rolling land, through scattering timber and dense undergrowth.

28.30 Wash, 10 lks. wide, course NW.

32.80 Wash, 100 lks. wide, course W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.



1934

Survey of West Boundary of T. 9 S., R. 5 W.


Chains

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

61.50 Wash, 20 lks. wide, course NW.

67.50 Road, bears NW. and SE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 19, 24, 25 and 30, with brass cap mkd.



1934

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, gently rolling. Soil, sandy and rocky; 2d and 3d rates. Timber, very scattering ironwood, mesquite and palo verde Undergrowth, greasewood, catclaw, ocotillo and cacti.

North, bet. secs. 19 and 24.


Over gently rolling land, through scattering timber and dense undergrowth.

1.50 Wash, 20 lks. wide, course NW.

17.00 Wash, 30 lks. wide, course W.

26.00 Wash, 10 lks. wide, course W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.




raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

43.30 Old road, bears NW. and SE.

77.80 Wash, 10 lks. wide, course NW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 13, 18, 19 and 24, with brass cap mkd.



1934

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Survey of West Boundary of T. 9 S., R. 5 W. BOOK 4051

Chains

Land, gently rolling.  
Soil, sandy loam and rocky; 2d and 3d rates.  
Timber, scattering ironwood, mesquite and palo verde.  
Undergrowth, greasewood, ocotillo, catclaw and cactus.

-----  
North, bet. secs. 13 and 18.


Over gently rolling land, through scattering timber and dense undergrowth.

15.00 Wash, 20 lks. wide, course NW.

22.70 Wash, 140 lks. wide, course W.

35.00 Wash, 100 lks. wide, course NW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.




raise a mound  
of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor.

44.40 Wash, 50 lks. wide, course NW.

50.00 Old road, bears E. and W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, with brass cap mkd.



raise a mound  
of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor.

Land, gently rolling.  
Soil, sandy and gravelly loam, 2d rate; rocky soil, 3d. rate.  
Timber, ironwood, mesquite and palo verde.  
Undergrowth, greasewood, ocotillo, catclaw and cactus.

-----  
North, bet. secs. 7 and 12.

Over gently rolling land, through scattering timber and dense undergrowth.

11.40 Wash, 15 lks. wide, course NW.

27.90 Wash, 150 lks. wide, course W.; asc. 39 ft. over S. slope.

33.00 Rocky spur, slopes W.; desc. 34 ft. over N. slope.

35.30 Wash, 50 lks. wide, course W.; thence over gently rolling land.



## Survey of West Boundary of T. 9 S., R. 5 W.

## Chains

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$   
 S12 | S7

1934

raise a mound  
of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

52.20 Wash, 20 lks. wide, course W.

62.80 Foot of slope, bears E. and W.; asc. 73 ft. over S. slope.

66.90 Rocky spur, slopes W.; desc. 47 ft. over N. slope.

70.95 Wash, 15 lks. wide, course SW.; asc. 190 ft. over S. slope.

79.40 Foot of cliff, bears E. and W.; asc. 40 ft. over S. face of cliff.

79.50 Top of cliff, bears E. and W.; asc. 5 ft. over SW. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 1, 6, 7 and 12, with brass cap mkd.

T 9 S  
 R 6 W | R 5 W  
 S 1 | S 6  
 ---  
 S12 | S 7

1934

raise a mound  
of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

Land, gently rolling and mountainous.

Soil, sandy loam, gravelly and rocky; 2d and 4th rates.

Timber, scattering ironwood, mesquite and palo verde.

Undergrowth, greasewood, catclaw, ocotillo and cactus.

-----  
North, bet. secs. 1 and 6.

Over rolling land, through scattering timber and dense undergrowth.

Ascend 82 ft. over SW. slope.

2.05 Spur, slopes NW.; desc. 320 ft. over rocky NE. slope.

16.07 Wash, 20 lks. wide, course NW.; asc. 67 ft. over SW. slope.

22.29 Spur, slopes NW.; desc. 123 ft. over NE. slope.

31.50 Foot of slope, bears NW. and SE.; thence over rolling land.

38.73 Wash, 30 lks. wide, course NW.


40.00 True point for  $\frac{1}{4}$  sec. cor. falls in center of wash, 30 lks. wide, course W., an unsafe location for cor. monument.

Survey of West Boundary of T. 9 S., R. 5 W.

BOOK 4051

Chains

40.40 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for witness  $\frac{1}{4}$  sec. cor., with brass cap mkd.



raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

47.50 Wash, 40 lks. wide, course W.; asc. 7 ft. over S. slope.

50.80 Spur, slopes W.; desc. 18 ft. over N. slope.


55.80 Wash, 20 lks. wide, course W.; asc. 40 ft. over SW. slope.

68.20 Spur, slopes W.; desc. 5 ft. over NW. slope.

71.90 Wash, 20 lks. wide, course W.; asc. 149 ft. over SW. slope.

79.00 Spur, slopes N.80°W.; desc. 39 ft. over N. slope.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 28 ins. in the ground, for cor. of Tps. 8 and 9 S., Rs. 5 and 6 W., with brass cap mkd.



raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft high, S. of cor.

Land, slightly rolling and mountainous.  
Soil, sandy loam, 2d rate; gravelly and rocky, 3d and 4th rates.  
Timber, very scattering ironwood and palo verde.  
Undergrowth, greasewood, catclaw, ocotillo and cactus.

## Survey of North Boundary of T. 9 S., R. 5 W.

Chains	
	From the cor. of Tps. 8 and 9 S., Rs. 4 and 5 W., West, on a random line making proper offsets to the north from the tangent to the parallel at intervals of 40.00 chs. setting temp. $\frac{1}{4}$ sec. and sec. corners along the line bet. Tps. 8 and 9 S., R. 5 W.
479.41	Intersect N. and S. line, 15 lks. N. of the cor. of Tps. 8 and 9 S., Rs. 5 and 6 W.
	Return to the cor. of Tps. 8 and 9 S., Rs. 4 and 5 W., which is an iron post, 3 ins. diam., firmly set in a mound of stone, 20 ins. high, marked on brass cap and witnessed as described in the field notes of survey of Tp. Exteriors of current Group 198.
	Thence
	S. $89^{\circ}59'$ W., on true line bet. secs. 1 and 36.
	Over rolling and mountainous land, through scattering timber and undergrowth.
	Ascend 29 ft. along S. slope.
5.30	Wash, 10 lks. wide, course S.
9.60	Wash, 10 lks. wide, course S.
15.30	Wash, 20 lks. wide, course S. $80^{\circ}$ E.; asc. 140 ft. over NE. slope.
26.30	Spur, slopes N.; desc. 181 ft. over NW. slope.
34.40	Wash, 10 lks. wide, course N.; thence over gentle N. slope.
36.40	Wash, 20 lks. wide, course NE.; asc. slightly over E. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bedrock and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4} \frac{S\ 36}{S\ 1}$
	1934
	raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
	Ascend 275 ft. over E. slope.
52.60	Rocky spur, slopes N.; desc. 239 ft. over NW. slope.
62.30	Gulch, course N.; asc. 270 ft. over broken NE. slope.
72.00	Spur, slopes N.; desc. 295 ft. over W. slope.
80.00	True point for cor. of secs. 1, 2, 35 and 36, falls in wash, 30 lks. wide, course N. $30^{\circ}$ W., an unsafe location for cor. monument.
	Land, rolling and mountainous. Soil, sandy and gravelly loam, rocky; 3d and 4th rates. Timber, scattering ironwood, mesquite and palo verde. Undergrowth, greasewood, scattering catclaw, ocotillo and cacti.

## Survey of North Boundary of T. 9 S., R. 5 W.

BOOK 4051

## Chains

From true point for cor. of secs. 1, 2, 35 and 36.

S. 89° 59' W., on true line bet. secs. 2 and 35.

Over mountainous land, through scattering timber and undergrowth.

Ascend 30 ft. over E. slope.

0.88 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for witness cor. to cor. of secs. 1, 2, 35 and 36, with brass cap mkd.

T 8 S	R 5 W
S 35	S 36
S 2	S 1
T9S	
1934	

raise a mound

of stone, 2 ft. base, 1½ ft. high, W. of cor.

Ascend 329 ft. over E. slope.

18.80 Rocky broken ridge, bears N. 30° E., and S. 30° W.; desc. 356 ft. over NW. slope.

29.30 Wash, 20 lks. wide, course N.; thence along N. slope.

33.20 Wash, 10 lks. wide, course NE.; asc. 24 ft. over E. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for ¼ sec. cor., with brass cap mkd.

S 35	
S 2	
1934	

Ascend 465 ft. over broken NE. slope.

68.30 Spur, slopes NE.; desc. 62 ft. over N. slope.

76.40 Head of gulch, course NE.; slight ascent along N. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., on surface rock, with a cross (+) mkd. at the base, and in a mound of stone to top, for cor. of secs. 2, 3, 34 and 35, with brass cap mkd.

T 8 S	R 5 W
S 34	S 35
S 3	S 2
T9S	
1934	

Land, mountainous.

Soil, sandy and gravelly loam, rocky; 4th rate.

Timber, scattering ironwood, mesquite and palo verde.

Undergrowth, greasewood, scattering catclaw, ocotillo and cacti.

## Survey of North Boundary of T. 9 S., R. 5 W.

Chains

S. 89° 59' W., on true line bet. secs. 3 and 34.

Over mountainous land, through scattering timber and undergrowth.

Ascend 62 ft. over NE. slope.

2.00 Ridge, bears N. 30° W., and S. 30° W.; desc. 545 ft. over W. slope.

20.10 Wash, 30 lks. wide, course N. 30° E.; asc. 347 ft. over E. slope.

30.20 Rocky spur, slopes N.; desc. 353 ft. over W. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., on surface rock, with a cross (+) mkd. at the base, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S 34

 $\frac{1}{4}$  

---

 S 3

1934

Desc. 131 ft. along N. slope.

51.00 Wash, 15 lks. wide, course NW.; asc. 184 ft. over NE. slope.

56.00 Rocky spur, slopes N.; desc. 175 ft. over NW. slope.

65.70 Wash; 20 lks. wide, course N. 15° W.; asc. 143 ft. over NE. slope.

77.00 Spur, slopes NE.; desc. 48 ft. over W. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground to bedrock and in a mound of stone to top, for cor. of secs. 3, 4, 33 and 34, with brass cap mkd.

T 8 S | R 5 W

S 33 | S 34

S 4 | S 3

T 9 S

1934

raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, mountainous.

Soil, sandy and gravelly loam, rocky; 4th rate.

Timber, scattering ironwood, mesquite and palo verde.

Undergrowth, greasewood, scattering catclaw, ocotillo and cacti.

S. 89° 59' W., on true line bet. secs. 4 and 33.

Over mountainous land, through scattering timber and undergrowth.

Descend 49 ft. over NW. slope.

5.00 Wash, 10 lks. wide, course NE.; asc. 160 ft. over E. slope.

8.60 Spur, slopes N.; desc. 143 ft. over NW. slope.

## Survey of North Boundary of T. 9 S., R. 5 W.

BOOK 4051

## Chains

15.40 Wash, 10 lks. wide, course N.; asc. 54 ft. over E. slope.

18.00 Spur, slopes N.30°E.; desc. 143 ft. over NW. slope.

22.70 Wash, 15 lks. wide, course NE.; asc. 472 ft. over NE. slope.

38.20 Ridge, bears N.30°W., and S.30°E.; desc. slightly.

40.00 Set an iron post, 3 ft. long, 1 in. diam., on surface rock, with a cross (+) mkd. at the base, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S 33
+ ———
S 4

1934

Descend 664 ft. over W. slope.

69.60 Wash, 100 lks. wide, course NW.; asc. 71 ft. over NE. slope.

78.90 Spur, slopes NW.; desc. 27 ft. over W. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground, to solid rock and in a mound of stone to top, for cor. of secs. 4, 5, 32 and 33, with brass cap mkd.

T. 8 S	R 5 W
S 32	S 33
S 5	S 4
T 9 S	

1934

raise a mound

of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

Land, mountainous.

Soil, sandy and gravelly loam, rocky; 4th rate.

Timber, scattering ironwood, mesquite and palo verde.

Undergrowth, greasewood, scattering catclaw, ocotillo and cacti.

S.89°59'W., on true line bet: secs. 5 and 32.

Over mountainous land, through scattering timber and undergrowth.

Descend 18 ft. over W. slope.

3.60 Wash, 30 lks. wide, course N.20°W.; asc. 113 ft. over NE. slope.

19.25 Spur, slopes N.; desc. 369 ft. over W. slope.

35.50 Wash, 30 lks. wide, course N.; thence over rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

Survey of North Boundary of T. 9 S., R. 5 W.

Chains

S 32

S 5

1934

raise a mound

of stone, 2 ft. base, 1½ ft. high, N. of cor.

Over rolling land along N. slope.

48.40 Wash, 40 lks. wide, course N.20°W.; asc. 91 ft. over NE. slope.

56.50 Spur, slopes NW.; desc. 155 ft. over W. slope.

65.00 Wash, 10 lks. wide, course NW.; asc. 273 ft. over E. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground, to bedrock and in a mound of stone to top, for cor. of secs. 5, 6, 31 and 32, with brass cap mkd.

T 8 S R 5 W

S 31 | S 32

S 6 | S 5

T 9 S

1934

raise a mound

of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, mountainous and rolling.

Soil, gravelly and rocky; 4th rate.

Timber, scattering ironwood, mesquite and palo verde.

Undergrowth, greasewood, scattering catclaw, ocotillo and cacti.

S.89°59'W., on true line bet. secs. 6 and 31.

Over mountainous land, through scattering timber and undergrowth.

Ascend 346 ft. over rocky and cliffy NE. slope.

5.00 Ridge, bears NW. and SE.; desc. 208 ft. over SW. slope.

15.00 Wash, 10 lks. wide, course S.; asc. 80 ft. over SE. slope.

20.00 Spur, slopes S.; desc. 209 ft. over SW. slope.

25.70 Wash, 20 lks. wide, course SW.; asc. 127 ft. over rocky SE. slope.

34.55 Point of rocky spur, slopes S.; thence along broken S. slope.

39.20 Top of cliff, bears N. and S.; desc. 63 ft. over W. face.

40.00 True point for ¼ sec. cor. falls on face of cliff, where it cannot be monumented.

40.65 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bedrock and in a mound of stone to top, for witness ¼ sec. cor., with brass cap mkd.

## Survey of North Boundary of T. 9 S., R. 5 W. BOOK 4051

Chains

$$\frac{S\ 31}{S\ 6} \text{ WC}$$

1934

raise a mound  
of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

This witness cor. is at base of cliff bearing N. and S.

Descend 84 ft. over SW. slope.

- 41.60 Wash, 20 lks. wide, course S.20°W.; asc. 187 ft. over SE. slope.
- 49.60 Ridge, bears N. and S.; desc. 516 ft. over W. slope.
- 74.70 Wash, 20 lks. wide, course NW.; asc. 95 ft. over NE. slope.
- 79.41 The cor. of Tps. 8 and 9 S., Rs. 5 and 6 W., hereinbefore described.

Land, mountainous.

Soil, gravelly and rocky; 4th rate.

Timber, scattering ironwood, mesquite and palo verde.

Undergrowth, greasewood, scattering catclaw, ocotillo and cacti.



## Survey of West Boundary of T. 8 S., R. 5 W.

## Chains

From the cor. of Tps. 8 and 9 S., Rs. 5 and 6 W., herein-  
before described.

North, bet. secs. 31 and 36.

Over mountainous land, through scattering timber and  
undergrowth.

Descend 148 ft. over NE. slope.

7.30 Wash, 5 lks. wide, course NW.; asc. 41 ft. over SW. slope.

15.00 Low spur, slopes W.; desc. 31 ft. over NW. slope.

22.00 Wash, 15 lks. wide, course W.; asc. 129 ft. over broken  
SW. slope.

37.70 Base of cliff, bears NW. and SE.; asc. 100 ft. over SW.  
face of cliff.

38.00 Top of cliff, bears NW. and SE.; asc. 10 ft. over SW.  
slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the  
ground to bedrock, and in a mound of stone to top, for  
 $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$   
 |  
 S36 | S31  
 |  
 1934

raise a mound  
of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

Ascend 65 ft. over broken SW. slope.

44.30 Spur, slopes NW.; desc. 353 ft. over NE. slope.

62.80 Wash, 10 lks. wide, course W.; asc. 166 ft. over SW. slope.

70.10 Spur, slopes NW.; desc. 126 ft. over NE. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 3 ins. in the  
ground to bedrock, and in a mound of stone to top, for  
cor. of secs. 25, 30, 31 and 36, with brass cap mkd.

T 8 S  
 R 6 W | R 5 W  
 S 25 | S 30  
 ---  
 S 36 | S 31

1934

raise a mound  
of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

Land, rough and mountainous

Soil, sandy loam, very rocky; 3d rate.

Timber, very scattering ironwood and palo verde.

Undergrowth, greasewood, sagebrush, ocotillo and cacti.

-----  
North, bet. secs. 25 and 30.

Over rolling and hilly land, through scattering timber

Survey of West Boundary of T. 8 S., R. 5 W.

BOOK 4051


Chains

and dense undergrowth.

Descend 50 ft. over NE. slope.

13.20 Wash, 10 lks. wide, course NW. Leave NE. slope, enter rolling land.


40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



dig pits, 18x18x12 ins. one each N. and S. of post, 3 ft. dist.

68.10 Wash, 20 lks. wide, course NW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 19, 24, 25 and 30, with brass cap mkd.



raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.


Land, hilly and rolling. Soil, sandy and gravelly loam, stony; 2d rate. Timber, scattering ironwood, mesquite and palo verde. Undergrowth, greasewood, scattering catclaw, ocotillo and cacti.

North, bet. secs. 19 and 24.

Over gently rolling land, through scattering timber and dense undergrowth.

2.80 Wash, 15 lks. wide, course W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground to bedrock, and in a mound of stone to top, for 1/4 sec. cor., with brass cap mkd.



raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

77.80 Wash, 15 lks. wide, course W.

## Survey of West Boundary of T. 8 S., R. 5 W.

Chains

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 13, 18, 19 and 24, with brass cap mkd.

T 8 S	
R 6 W	R 5 W
S 13	S 18
S 24	S 19

1934

raise a mound  
of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, gently rolling.  
Soil, sandy and gravelly loam, rocky; 3d rate.  
Timber, scattering palo verde, ironwood and mesquite.  
Undergrowth, greasewood, scattering ocotillo and cacti.

North, bet. secs. 13 and 18.

Over rolling land, through scattering timber and dense undergrowth.

3.00 Wash, 70 lks. wide, course NW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground to bedrock, and in a mound of stone to top, for ¼ sec. cor., with brass cap mkd.

¼	
S13	S18

1934

raise a mound  
of stone, 2 ft. base, 1½ ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, with brass cap mkd.

T 8 S	
R 6 W	R 5 W
S 12	S 7
S 13	S 18

1934

raise a mound  
of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.  
Soil, sandy and gravelly loam, rocky; 3d rate.  
Timber, scattering palo verde, ironwood and mesquite.  
Undergrowth, greasewood, scattering ocotillo and cacti.

North, bet. secs. 7 and 12.


Over rolling land, through scattering timber and dense undergrowth.

## Survey of West Boundary of T. 8 S., R. 5 W.

BOOK 4051

## Chains

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.



raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

43.40 Wash, 35 lks. wide, course N.80°W.

49.60 Base of hill, bears NW. and SE.; asc. 314 ft. over SW. slope.

70.40 Spur, slopes W.; desc. 180 ft. over NW. slope.

80.00 Set a malpais stone, 12x18x40 ins., 17 ins. in the ground, and in a mound of stone, for cor. of secs. 1, 6, 7 and 12, mkd. with 1 groove on N. face, and 5 grooves on S. face. Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

Land, rolling and hilly.

Soil, sandy and gravelly loam, rocky; 3d rate.

Timber, very scattering palo verde and ironwood.

Undergrowth, greasewood, scattering ocotillo and cacti.

-----  
North, bet. secs. 1 and 6.


Over rolling land, through scattering timber and dense undergrowth.

Descend 150 ft. over NW. slope.

11.00 Base of hill, bears E. and W.; enter rolling land.

38.25 Tucson, Cornelia and Gila Bend Railroad, bears N.25 $\frac{1}{4}$ °E., to Gila Bend, and S.25 $\frac{1}{4}$ °W., to Ajo.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with a railroad fish plate 20 ins. long, deposited alongside, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.



raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

41.75 Telegraph line, bears N.25 $\frac{1}{4}$ °E., and S.25 $\frac{1}{4}$ °W.

44.15 Highway, bears N.25 $\frac{1}{4}$ °E., to Gila Bend and S.25 $\frac{1}{4}$ °W., to Ajo.

72.15 Telephone line, bears N.25°E. and S.25°W.

80.00 Set an iron post, 3 ft. long, 3 ins. diam., 28 ins. in the ground, with a broken glass bottle deposited at the base, for cor. of Tps. 7 and 8 S., Rs. 5 and 6 W., with

Survey of West Boundary of T. 8 S.; R. 5 W.

Chains

brass cap mkd.

T 7 S		T 7 S
R 6 W		R 5 W
S 36		S 31
S 1		S 6
T 8 S		T 8 S

1934

Land, hilly and rolling.  
 Soil, sandy, gravelly and stony; 2d and 3d rates.  
 Timber, scattering ironwood, mesquite and palo verde.  
 Undergrowth, greasewood, ocotillo and cacti.

## Survey of North Boundary of T. 8 S., R. 5 W. BOOK 4051

## Chains

From the cor. of Tps. 7 and 8 S., Rs. 4 and 5 W.,  
West, on a random line, making proper offsets to the north  
from the tangent to the parallel at intervals of 40.00  
chs., setting temp.  $\frac{1}{4}$  sec. and sec. corners along the  
line bet. Tps. 7 and 8 S., Rs. 5 W.

478.79 Intersect N. and S. line 84 lks. N. of the cor. of Tps.  
7 and 8 N., Rs. 5 and 6 W., hereinbefore described.

Thence

N.  $89^{\circ}54'E.$ , on true line bet. secs. 6 and 31.

Over rolling land, through scattering timber and dense  
undergrowth.

3.66 Telephone line, bears N.  $25\frac{1}{4}^{\circ}E.$ , and S.  $25\frac{1}{4}^{\circ}W.$

17.00 Highway, bears N.  $25\frac{1}{4}^{\circ}E.$ , to Gila Bend and S.  $25\frac{1}{4}^{\circ}W.$ , to Ajo.

19.00 Telegraph line, bears N.  $25\frac{1}{4}^{\circ}E.$ , and S.  $25\frac{1}{4}^{\circ}W.$

19.70 Railroad, bears N.  $25\frac{1}{4}^{\circ}E.$  to Gila Bend and S.  $25\frac{1}{4}^{\circ}W.$  to Ajo.

38.79 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the  
ground, with a piece of iron,  $1\frac{1}{2} \times 4 \times 6$  ins., deposited at  
the base, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S 31

$\frac{1}{4}$  ———  
S 6

1934

raise a mound  
of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

59.20 Wash, 10 lks. wide, course N.

62.10 Wash, 10 lks. wide, course NW.; asc. 28 ft. over W. slope.

68.00 Top of hill; desc. 31 ft. over E. slope.

78.00 Foot. of descent, bears N. and S.; thence over rolling land.

78.79 Set a malpais stone,  $6 \times 10 \times 20$  ins., 15 ins. in the ground,  
for cor. of secs. 5, 6, 31 and 32, mkd. with 5 grooves  
on E. face, and 1 groove on W. face. Raise a mound of  
stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

Land, rolling and hilly.

Soil, sandy and gravelly loam, stony; 2d and 3d rates.

Timber, scattering ironwood, mesquite and palo verde.

Undergrowth, greasewood, scattering catclaw and cacti.

N.  $89^{\circ}54'E.$ , on true line bet. secs. 5 and 32.

Over rolling land, through scattering timber and dense  
undergrowth.

8.60 Old road, bears N. and S.

23.00 Wash, 15 lks. wide, course N.

31.80 Old road, bears N. and S.

## Survey of North Boundary of T. 8 S., R. 5 W.

Chains	
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.  <div style="text-align: center;">           S 32  <math>\frac{1}{4}</math> —————            S 5            1934         </div> raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
62.40	Old road, bears NW. and SE.
80.00	Set a malpais stone, 6x9x20 ins., 15 ins. in the ground, for cor. of secs. 4, 5, 32 and 33, mkd. with 4 grooves on E. face, and 2 grooves on W. face. Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high W. of cor.  Land, rolling. Soil, sandy and gravelly loam; 1st and 2d rates. Timber, scattering ironwood, mesquite and palo verde. Undergrowth, greasewood, scattering catclaw and cacti.
-----	
	N.89°54'E., on true line bet. secs. 4 and 33.  Over rolling land, through scattering timber and dense undergrowth.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.  <div style="text-align: center;">           S 33  <math>\frac{1}{4}</math> —————            S 4            1934         </div> raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
56.80	Wash, 10 lks. wide, course N.
80.00	Set a malpais stone, 14x14x12 ins., 15 ins. in the ground, for cor. of secs. 3, 4, 33 and 34, mkd. with 3 grooves on each of E. and W. faces. Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.  Land, rolling. Soil, sandy and gravelly loam, stony; 2d rate. Timber, scattering ironwood, mesquite and palo verde. Undergrowth, greasewood, scattering catclaw and cacti.
-----	
	N.89°54'E., on true line bet. secs. 3 and 34.  Over rolling land, through scattering timber and dense undergrowth.
5.20	Wash, 15 lks. wide, course N.
14.40	Wash, 60 lks. wide, course NW.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

## Survey of North Boundary of T. 8 S., R. 5 W.

BOOK 4051

Chains

- $$\frac{1}{4} \frac{S\ 34}{S\ 3}$$
 1934
- raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.
- 76.30 Wash, 60 lks. wide, course N.
- 80.00 Set a granite boulder, 8x10x20 ins., 15 ins. in the ground for cor. of secs. 2, 3, 34 and 35, mkd. with 2 grooves on E. face, and 4 grooves on W. face: from which
- An ironwood, 8 ins. diam., bears N.  $26\frac{1}{2}^{\circ}$  W., 125 lks. mkd. T 7 S R 5 W S 34 BT
- Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.
- Land, rolling.  
Soil, sandy and gravelly loam, stony; 2d rate.  
Timber, scattering ironwood, mesquite and palo verde.  
Undergrowth, greasewood, scattering catclaw and cacti.
- 
- N.  $89^{\circ}54'$  E., on true bet. secs. 2 and 35.
- Over rolling land, through scattering timber and dense undergrowth.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.
- $$\frac{1}{4} \frac{S\ 35}{S\ 2}$$
 1934
- raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.
- 80.00 Set a granite stone, 6x10x20 ins., 15 ins. in the ground, for cor. of secs. 1, 2, 35 and 36, mkd. with 2 grooves on E. face, and 4 grooves on W. face. Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.
- Land, rolling.  
Soil, sandy and gravelly loam, stony; 2d rate.  
Timber, scattering ironwood, mesquite and palo verde.  
Undergrowth, greasewood, scattering catclaw and cacti.
- 
- N.  $89^{\circ}54'$  E., on true line bet. secs. 1 and 36.
- Over rolling land, through scattering timber and dense undergrowth.
- 32.10 Wash, 20 lks. wide, course NW.
- 39.40 Wash, 10 lks. wide, course NW.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.



Survey of North Boundary of T. 8 S., R. 5 W.

Chains	
80.00	<p style="text-align: center;">S 36 ----- S 1 1934</p> <p style="text-align: right;">from which</p> <p>An ironwood, 9 ins. diam., bears S.40°W., 57 lks. mkd. ¼ S1 BT.</p> <p>Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.</p> <p>The cor. of Tps. 7 and 8 S., Rs. 4 and 5 W., which is an iron post, 3 ins. diam., projecting 8 ins. above ground, firmly set, marked on brass cap and witnessed as described in the field notes of Tp. Exterior of current Group 198.</p> <p>Land, rolling. Soil, sandy, gravelly loam and stony; 2d rate. Timber, scattering ironwood, mesquite and palo verde. Undergrowth, greasewood, catelaw and cacti.</p>

Survey of West Boundary of T. 7 S., R. 5 W. BOOK 4051

Chains


From the cor. of Tps. 7 and 8 S., Rs. 5 and 6 W., herein-  
before described.

North, bet. secs. 31 and 36.

Over rolling land, through scattering timber and dense  
undergrowth.

1.70 Wash, 12 lks. wide, course NE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the  
ground, with a malpais stone, 3x12x20 ins., mkd. with a  
cross (+) deposited at base, for  $\frac{1}{4}$  sec. cor., with brass  
cap mkd.



raise a mound  
of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor.

50.00 Wash, 20 lks. wide, course NE.

65.00 Base of hill, bears E. and W.; asc. 30 ft. over S. slope.

75.00 Spur, slopes E.; desc. 8 ft. along E. slope.

77.80 Head of wash, course E.; asc. 17 ft. over SE. slope.

80.00 Set a malpais stone, 6x10x20 ins., 15 ins. in the ground,  
for cor. of secs. 25, 30, 31 and 36; mkd. with 1 groove  
on S. face, and 5 grooves on N. face; and raise a mound  
of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor.

This cor. is on a spur, sloping NE.

Land, rolling and hilly.  
Soil, sandy and gravelly loam, stony; 2d and 3d rates.  
Timber, scattering ironwood, mesquite and palo verde.  
Undergrowth, greasewood, scattering catclaw and cacti.

North, bet. secs. 25 and 30.


Over hilly land, through scattering timber and dense  
undergrowth.

Descend 60 ft. over N. slope.

20.00 Base of hill, bears NW. and SE.; thence over rolling land.

34.10 Wash, 8 lks. wide, course E.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the  
ground to bedrock, with a malpais stone, 5x6x8 ins. mkd.  
with a cross (+) deposited at the base, for  $\frac{1}{4}$  sec. cor.,  
with brass cap mkd.



66.10 Wash, 30 lks. wide, course E.

## Survey of West Boundary of T. 7 S., R. 5 W.

## Chains

80.00 Set a malpais stone 6x10x20 ins., 15 ins. in the ground, for cor. of secs. 19, 24, 25 and 30, mkd. with 2 grooves on S. face, and 4 grooves on N. face; raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, hilly and rolling.  
Soil, sandy and gravelly loam, stony; 1st and 3d rates.  
Timber, scattering ironwood, mesquite and palo verde.  
Undergrowth, greasewood, scattering catclaw and cacti.

North, bet. secs. 19 and 24.

Over rolling land, through scattering timber and dense undergrowth.

36.20 Wash, 12 lks. wide, course NE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with a granite stone, 3x6x12 ins. mkd. with a cross (+) deposited at the base, for ¼ sec. cor., with brass cap mkd.

↑  
S24 | S19

1934

80.00 Set a malpais stone, 7x8x20 ins., 15 ins. in the ground, for cor. of secs. 13, 18, 19 and 24, mkd. with 3 grooves on each of N. and S. faces; raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.  
Soil, sandy and gravelly loam; 1st rate.  
Timber, scattering ironwood, mesquite and palo verde.  
Undergrowth, greasewood, scattering catclaw and cacti.

North, bet. secs. 13 and 18.

Over rolling land, through scattering timber and dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with a granite stone, 3x6x10 ins., mkd. with a cross (+) deposited at the base, for ¼ sec. cor., with brass cap mkd.

↑  
S13 | S18

1934

80.00 Set a malpais stone, 6x8x20 ins., 15 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, mkd. with 4 grooves on S. face and 2 grooves on N. face; raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.  
Soil, sandy and gravelly loam; 1st and 2d rates.  
Timber, scattering ironwood, mesquite and palo verde.  
Undergrowth, greasewood, scattering catclaw and cacti.

## Survey of West Boundary of T. 7 S., R. 5 W.


BOOK 4051

## Chains

North, bet. secs. 7 and 12.

Over rolling land, through scattering timber and dense undergrowth.

- 20.00 Base of hill, bears NW. and SE.; asc. 33 ft. over SW. slope.  
 30.00 Spur, slopes SW.; desc. 17 ft. along W. slope to  $\frac{1}{4}$  sec. cor.  
 35.00 Rocky butte, bears E. about 6.00 chs. dist.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.



raise a mound  
of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

Descend 8 ft. along W. slope.

- 42.00 Wash, 3 lks. wide, course W.; asc. 91 ft. along W. slope.  
 63.00 Low spur, slopes NW.; desc. 115 ft. over NE. slope to base of hill.  
 69.00 Rocky butte, bears W. about 2 chs. dist.  
 73.00 Base of hill, bears NE. and SW.; thence over rolling land.  
 80.00 Set a malpais stone, 12x12x20 ins., 15 ins. in the ground, for cor. of secs. 1, 6, 7 and 12, mkd. with 5 grooves on S. face, and 1 groove on N. face; raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

Land, rolling and hilly.

Soil, sandy and gravelly loam, rocky; 1st and 3d rates.

Timber, scattering ironwood, mesquite and palo verde.

Undergrowth, greasewood, scattering catclaw and cacti.

North, bet. secs. 1 and 6.

Over rolling land, through scattering timber and dense undergrowth.

- 40.00 Set a malpais stone, 6x11x24 ins., 18 ins. in the ground, for  $\frac{1}{4}$  sec. cor., mkd.  $\frac{1}{4}$  on W. face; and dig pits, 18x18x12 ins. one each N. and S. of post, 3 ft. dist.  
 75.67 Intersect the S. bdy. of sec. 36, T. 6 S., R. 6 W.  
 At point of intersection,  
 Set an iron post, 3 ft. long, 3 ins. diam., 28 ins. in the ground, with a malpais stone, 2x12x24 ins. mkd. with a cross (+) deposited at base, for closing cor. of Tps. 7 S., Rs. 5 and 6 W., with brass cap mkd.

Survey of West Boundary of T. 7 S., R. 5 W.

Chains

T. 6 S. R. 6 W.

S 36

S 1	S 6
R 6 W.	R 5 W.

CC

T 7 S

1934

From point of intersection, the cor. of Tps. 6 S., Rs. 5 and 6 W., hereinbefore described, bears S. 88° 41' E., 6.80 chs. dist.

Land, rolling.

Soil, sandy, gravelly loam; 1st rate.

Timber, scattering ironwood, mesquite and palo verde.

Undergrowth, scattering greasewood, catclaw and cacti.

Survey of West Boundary of T. 9 S., R. 6 W.

BOOK 4051

Chains

From the standard cor. of Tps. 9 S., Rs. 6 and 7 W., described in the field notes of the independent resurvey of the 2nd Standard Parallel South, through Rs. 5, 6, and 7 W., executed under this group.

North, bet. secs. 31 and 36.


Over rolling land, through scattering timber and dense undergrowth.

6.30 Wash, 50 lks. wide, course NE.

20.00 Wash, 8 lks. wide, course E.

36.70 Leave rolling land, bears E. and W.; asc. 10 ft. over SE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bedrock, and in a mound of stone to top, for 1/4 sec. cor., with brass cap mkd.



raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.


The 1/4 sec. cor. is on spur, sloping NE.

Descend 10 ft. over N. slope.

42.00 Enter rolling land, bears NW. and SE.

49.80 Road, bears N.10°W., to Sentinel and S.10°E., to Ajo.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 25, 30, 31 and 36, with brass cap mkd.



1934

dig pits, 18x18x12 ins., one in each sec., 3 ft. dist.

Land, rolling. Soil, sandy and gravelly loam, rocky in places; 2d rate. Timber, scattering ironwood, mesquite and palo verde. Undergrowth, greasewood, scattering catchlaw and caeñi.

North, bet. secs. 25 and 30.

Over rolling land, through scattering timber and dense undergrowth.

37.40 Wash, 8 lks. wide, course N.60°E.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the

## Survey of West Boundary of T. 9 S., R. 6 W.

Chains

ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.
$$\begin{array}{c} \frac{1}{4} \\ | \\ S25 \quad | \quad S30 \end{array}$$

1934

dig pits,

18x18x12 ins. one each N. and S. of post, 3 ft. dist.

48.10 Wash, 12 lks. wide, course NE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs, 19, 24, 25 and 30, with brass cap mkd.

$$\begin{array}{c} T \ 9 \ S \\ R \ 7 \ W \ | \ R \ 6 \ W \\ S \ 24 \ | \ S \ 19 \\ \hline S \ 25 \ | \ S \ 30 \end{array}$$

1934

dig pits,

18x18x12 ins. one in each sec., 3 ft. dist.

Land, rolling.

Soil, sandy and gravelly loam; 1st and 2d. rates.

Timber, scattering ironwood, mesquite and palo verde.

Undergrowth, greasewood, scattering catclaw and cacti.

North, bet. secs. 19 and 24.

Over rolling land, through scattering timber and dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.
$$\begin{array}{c} \frac{1}{4} \\ | \\ S24 \quad | \quad S19 \end{array}$$

1934

dig pits,

18x18x12 ins. one each N. and S. of post, 3 ft. dist.

48.60 Wash, 50 lks. wide, course NW.

53.20 Wash, 50 lks. wide, course NW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 13, 18, 19 and 24, with brass cap mkd.

$$\begin{array}{c} T \ 9 \ S \\ R \ 7 \ W \ | \ R \ 6 \ W \\ S \ 13 \ | \ S \ 18 \\ \hline S \ 24 \ | \ S \ 19 \end{array}$$

1934

Survey of West Boundary of T. 9 S., R. 6 W.

BOOK 4051

Chains

dig pits,


18x18x12 ins., one in each sec., 3 ft. dist.

Land, rolling.  
Soil, sandy and gravelly loam; 1st and 2d rates.  
Timber, scattering ironwood, mesquite and palo verde.  
Undergrowth, greasewood, scattering catclaw and cacti.

North, bet. secs. 13 and 18.

Over rolling land, through scattering timber and dense undergrowth.


40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.



dig pits,

18x18x12 ins., one each N. and S. of post, 3 ft. dist.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, with brass cap mkd.



raise a mound

of stone, 2 ft. base, 1 1/2 ft. high; W. of cor.


Land, rolling.  
Soil, sandy and gravelly loam; 1st rate.  
Timber; scattering ironwood, mesquite and palo verde.  
Undergrowth, greasewood, scattering catclaw and cacti.

North, bet. secs. 7 and 12.

Over rolling land, through scattering timber and dense undergrowth.

5.00 Wash, 25 lks. wide, course NW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.



dig pits,

18x18x12 ins. one each N. and S. of post, 3 ft. dist.



## Survey of West Boundary of T. 9 S., R. 6 W.

Chains.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 1, 6, 7 and 12, with brass cap mkd.

T 9 S	
R 7 W	R 6 W
S 1	S 6
S 12	S 7

1934

dig pits,

18x18x12 ins., one in each sec., 3 ft. dist.

Land, rolling.

Soil, sandy and gravelly loam; 1st rate.

Timber, scattering ironwood, mesquite and palo verde.

Undergrowth, greasewood, scattering catclaw and cacti.

North, bet. secs. 1 and 6.

Over rolling land, through scattering timber and dense undergrowth.

10.55 Road, bears NW. and SE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$	
S 1	S 36

1934

dig pits,

18x18x12 ins., N. and S. of post, 3 ft. dist.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of Tps. 8 and 9 S., Rs. 6 and 7 W., with brass cap mkd.

T 8 S	
R 7 W	R 6 W
S 36	S 31
S 1	S 6

T 9 S

1934

dig pits,

18x18x12 ins., one each NE., SE., SW. and NW. of post, 3 ft. dist.

Land, gently rolling.

Soil, sandy and gravelly loam; 1st rate.

Timber, very scattering ironwood, mesquite and palo verde.

Undergrowth, greasewood, scattering catclaw and cacti.

Survey of North Boundary of T. 9 S., R. 6 W.

BOOK 4051

Chains

From the cor. of Tps. 8 and 9 S., Rs. 5 and 6 W.

West, on a random line, making proper offsets to the North from the tangent to the parallel at intervals of 40.00 chs. setting temp. 1/4 sec. and sec. corners along the line bet. Tps. 8 and 9 S., Rs. 6 W.

479.15 Intersect N. and S. line, 27 lks. S. of the cor. of Tps. 8 and 9 S., Rs. 6 and 7 W.

Return to the cor. of Tps. 8 and 9 S., Rs. 5 and 6 W., hereinbefore described,

Thence

N. 89° 58' W., on true line bet. secs. 1 and 36.

Over rolling land, through scattering timber and dense undergrowth.


Ascend 9 ft. over NE. slope.

1.00 Spur, slopes NW.; desc. 129 ft. along broken W. slope along top of ridge, sloping W.

30.70 Spur, slopes NW.; desc. 42 ft. over SW. slope.

38.10 Wash, 10 lks. wide, course NW.; thence over rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



1934


raise a mound

of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

44.50 Wash, 20 lks. wide, course NW.

60.00 Wash, 10 lks. wide, course NW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 1, 2, 35 and 36, with brass cap mkd.



T9S

1934

raise a mound

of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, hilly and rolling.

Soil, sandy and gravelly loam, rocky in places; 2d and 3d rates.

Timber, scattering palo verde and ironwood.

Undergrowth, scattering greasewood and sagebrush.

N. 89° 58' W., on true line bet. secs. 1 and 36.

Survey of North Boundary of T. 9 S., R. 6 W.

Chains N. 89° 58' W., on true line bet. secs. 2 and 35.  
 Over rolling land, through scattering timber and dense undergrowth.

3.20 Leave rolling and enter hilly land; asc. 117 ft. over E. slope.

10.40 Spur, slopes S.; desc. 74 ft. over NW. slope.

15.40 Ravine, course SW.; asc. 43 ft. over SE. slope.

18.80 Spur; slopes SW.; desc. 109 ft. over W. slope.

31.40 Foot of descent, bears N. and S.; enter rolling land.

32.10 Old road, bears NE. and SW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S 35

S 2

1934

raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

45.45 Tucson, Cornelia and Gila Bend Railroad, bears N. 26° E., to Gila Bend, and S. 26° W., to Ajo.

47.10 Telegraph line, bears N. 27° E., and S. 27° W.

48.20 Highway, bears N. 27° E., to Gila Bend, and S. 27° W., to Ajo.

63.40 Telephone line, bears N. 20° E., and S. 20° W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 2, 3, 34 and 35, with brass cap mkd.

T 8 S R 6 W

S 34 S 35

S 3 S 2

T 9 S

1934

raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

Land, hilly and rolling.  
 Soil, sandy and gravelly loam; 2d and 3d rates.  
 Timber, scattering ironwood and palo verde.  
 Undergrowth, greasewood, ocotillo and cacti.

N. 89° 58' W., on true line bet. secs. 3 and 34.

Over rolling land, through scattering timber and dense undergrowth.

23.60 Wash, 10 lks. wide, course NW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

Survey of North Boundary of T. 9 S., R. 6 W.

BOOK 4051

Chains

$$\frac{1}{4} \begin{array}{c} \text{S } 34 \\ \hline \text{S } 3 \end{array}$$

1934

raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 3, 4, 33 and 34, with brass cap mkd.

T 8 S	R 6 W
S 33	S 34
S 4	S 3

T9S

1934

dig pits,

18x18x12 ins., one in each sec., 3 ft. dist.

Land, rolling.

Soil, sandy and gravelly loam; 1st and 2d rates.

Timber, scattering ironwood, mesquite and palo verde.

Undergrowth, greasewood, scattering catclaw and cacti.

N.89°58'W; on true line bet. secs. 4 and 33.

Over rolling land, through scattering timber and dense undergrowth.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for ¼ sec. cor., with brass cap mkd.

$$\frac{1}{4} \begin{array}{c} \text{S } 33 \\ \hline \text{S } 4 \end{array}$$

1934

dig pits,

18x18x12 ins., one each E. and W. of post, 3 ft. dist.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 4, 5, 32 and 33, with brass cap mkd.

T 8 S	R 6 W
S 32	S 33
S 5	S 4

T9S

1934

dig pits,

18x18x12 ins., one in each sec., 3 ft. dist.

Land, rolling.

Soil, sandy and gravelly loam; 1st and 2d rates.

Timber, scattering ironwood, mesquite and palo verde.

Undergrowth, greasewood, catclaw and cacti.

N.89°58'W; on true line bet. secs. 5 and 33.

## Survey of North Boundary of T. 9 S., R. 6 W.

Chains N. 89° 58' W., on true line bet. secs. 5 and 32.  
Over rolling land, through scattering timber and dense undergrowth.

5.80 Wash, 10 lks. wide, course NW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$$\frac{1}{4} \frac{S 32}{S 5}$$

1934

dig pits,

18x18x12 ins., one each E. and W. of post, 3 ft. dist.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 5, 6, 31 and 32, with brass cap mkd.

T 8 S	R 6 W
S 31	S 32
S 6	S 5

T 9 S

1934

dig pits,

18x18x12 ins., one in each sec., 3 ft. dist.

Land, rolling.

Soil, sandy and gravelly loam; 1st and 2d rates.

Timber, scattering ironwood, mesquite and palo verde.

Undergrowth, greasewood, catclaw and cacti.

N. 89° 58' W., on true line bet. secs. 6 and 31.

Over rolling land, through scattering timber and dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$$\frac{1}{4} \frac{S 31}{S 6}$$

1934

dig pits,

18x18x12 ins., one each E. and W. of post, 3 ft. dist.

79.15 The cor. of Tps. 8 and 9 S., Rs. 6 and 7 W., hereinbefore described.

Land, rolling.

Soil, sandy and gravelly loam; 1st and 2d rates.

Timber; scattering ironwood, and palo verde.

Undergrowth, greasewood and scattering catclaw and cacti.

Survey of West Boundary of T. 8 S., R. 6 W.

BOOK 4081


Chains

From the cor. of Tps. 8 and 9 S., Rs. 6 and 7 W., herein-  
before described.

North, bet. secs. 31 and 36.


Over gently rolling land, through very scattering timber  
and dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.



dig pits,  
18x18x12 ins., one each N. and S. of post, 3 ft. dist.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in  
the ground, for cor. of secs. 25, 30, 31 and 36, with  
brass cap mkd.




dig pits,  
18x18x12 ins., one in each sec., 3 ft. dist.

Land, gently rolling.  
Soil, sandy and gravelly loam; 1st rate.  
Timber, very scattering ironwood and palo verde.  
Undergrowth, greasewood and scattering cacti.

North, bet. secs. 25 and 30.


Over gently rolling land, through scattering timber and  
dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.



dig pits,  
18x18x12 ins., one each N. and S. of post, 3 ft. dist.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in  
the ground, for cor. of secs. 19, 24, 25 and 30, with  
brass cp mkd.



## Survey of West Boundary of T. 8 S., R. 6 W.

Chains

dig pits,


18x18x12 ins., one in each sec., 3 ft. dist.

Land, gently rolling.  
 Soil, sandy and gravelly loam; 1st rate.  
 Timber, very scattering ironwood and palo verde.  
 Undergrowth, greasewood and scattering cacti.

-----  
 North, bet. secs. 19 and 24.

Over gently rolling land, through scattering timber and dense undergrowth.


40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.



dig pits,

18x18x12 ins., one each N. and S. of post, 3 ft. dist.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 13, 18, 19 and 24, with brass cap mkd.



dig pits,


18x18x12 ins., one in each sec., 3 ft. dist.

Land, gently rolling.  
 Soil, sandy and gravelly loam; 1st rate.  
 Timber, very scattering ironwood and palo verde.  
 Undergrowth, greasewood and scattering cacti.

-----  
 North, bet. secs. 13 and 18.

Over gently rolling land, through scattering timber and dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.



dig pits,


18x18x12 ins., one each N. and S. of post, 3 ft. dist.

Survey of West Boundary of T. 8 S., R. 6 W.

BOOK 4051

Chains

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, with brass cap mkd.



1934

dig pits,


18x18x12 ins., one in each sec., 3 ft. dist.

Land, gently rolling.  
Soil, sandy and gravelly loam; 1st rate.  
Timber, scattering ironwood and palo verde.  
Undergrowth, greasewood and scattering cacti.

North, bet. secs. 7 and 12.

Over gently rolling land, through scattering timber and dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.




1934

dig pits,

18x18x12 ins., one each N. and S. of post, 3 ft. dist.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 1, 6, 7 and 12, with brass cap mkd.



1934

dig pits,

18x18x12 ins., one in each sec., 3 ft. dist.

Land, gently rolling.  
Soil, sandy and gravelly loam; 1st rate.  
Timber, very scattering ironwood, mesquite and palo verde.  
Undergrowth, greasewood, and scattering cacti.

North, bet. secs. 1 and 6.

Over gently rolling land, through scattering timber and dense undergrowth.


40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the



Survey of West Boundary of T. 8 S., R. 6 W.

Chains

ground, for 1/4 sec. cor., with brass cap mkd.





18x18x12 ins., one each N. and S. of post, 3 ft. dist. dig pits,

75.20 Intersect the S. bdy. of sec. 36, T. 7 S., R. 7 W.

At point of intersection,

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for closing cor. of Tps. 8 S., Rs. 6 and 7 W., with brass cap mkd.



1934

18x18x12 ins., one each E., W. and S. of post, 3 ft. dist. dig pits,

From point of intersection the cor. of T. 7 S., R. 7 W., only (SE. cor), hereinbefore described, bears S.89°44'E., 7.37 chs. dist.

Land, gently rolling.  
Soil, sandy and gravelly loam; 1st rate.  
Timber, very scattering palo verde.  
Undergrowth, scattering ocotillo and cacti.

## Survey of North Boundary of T. 8 S., R. 6 W. BOOK 4051

## Chains

From the cor. of Tps. 7 and 8 S., Rs. 5 and 6 W., herein-  
before described,

West, bet. secs. 1 and 36.

Over rolling land, through scattering timber and dense  
undergrowth.

0.65 Wash, 12 lks. wide, course N.10°E.

30.00 Base of hill, bears NW. and S.; enter hilly land; asc.  
57 ft. over NE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the  
ground to bedrock, with a malpais stone, 4x4x6 ins., mkd.  
with a cross (+) deposited at the base, and in a mound  
of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$$\frac{1}{4} \begin{array}{c} S 36 \\ \hline S 1 \end{array}$$

1934

Ascend 100 ft. along N. slope.

65.00 Spur, slopes N.; desc. 188 ft. over NW. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in  
the ground, for cor. of secs. 1, 2, 35 and 36, with  
brass cap mkd.

$$\begin{array}{c} T 7 S \quad R 6 W \\ S 35 \quad | \quad S 36 \\ \hline S 2 \quad | \quad S 1 \\ T 8 S \end{array}$$

1934

dig pits,  
18x18x12 ins., one in each sec., 3 ft. dist.

Land, rolling and hilly.

Soil, sandy and gravelly loam; 1st rate.

Timber, scattering ironwood, mesquite and palo verde.

Undergrowth, greasewood, scattering catclaw and cacti.

West, bet. secs. 2 and 35.

Over hilly land, through scattering undergrowth.

Descend 16 ft. over NW. slope.

0.80 Base of hill, bears NE. and SW.; thence over rolling land  
through scattering timber and dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$$\frac{1}{4} \begin{array}{c} S 35 \\ \hline S 2 \end{array}$$

1934

dig pits,  
18x18x12 ins., one each E. and W. of post, 3 ft. dist.

## Survey of North Boundary of T. 8 S., R. 6 W.

Chains

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 2, 3, 34 and 35, with brass cap mkd.

T 7 S	R 6 W
S 34	S 35
S 3	S 2
T 8 S	
1934	

dig pits,

18x18x12 ins., one in each sec., 3 ft. dist.

Land, rolling.

Soil, sandy and gravelly loam; 1st rate.

Timber, scattering ironwood, mesquite and palo verde.

Undergrowth, greasewood, scattering catclaw and cacti.

-----

West, bet. secs. 3 and 34.

Over rolling land, through scattering timber and dense undergrowth.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock, with a malpais stone 3x4x4 ins. mkd. with a cross (+) deposited at base, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S 34
$\frac{1}{4}$
S 3
1934

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 3, 4, 33 and 34, with brass cap mkd.

T 7 S	R 6 W
S 33	S 34
S 4	S 3
T 8 S	
1934	

dig pits,

18x18x12 ins., one in each sec., 3 ft. dist.

Land, rolling.

Soil, sandy and gravelly loam; 1st rate.

Timber, scattering ironwood, mesquite and palo verde.

Undergrowth, greasewood, scattering catclaw and cacti.

-----

West, bet. secs. 4 and 33.

Over rolling land, through scattering timber and dense undergrowth.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

## Survey of North Boundary of T. 8 S., R. 6 W. BOOK 4051

Chains

$$\frac{1}{4} \frac{S 33}{S 4}$$

1934.

dig pits,

18x18x12 ins., one each E. and W. of post, 3 ft. dist.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 4, 5, 32 and 33, with brass cap mkd.

T 7 S	R 6 W
S 32	S 33

S 5	S 4
-----	-----

T 8 S

1934

dig pits,

18x18x12 ins., one in each sec., 3 ft. dist.

Land, rolling.

Soil, sandy and gravelly loam; 1st rate.

Timber, scattering ironwood, mesquite and palo verde.

Undergrowth, greasewood, scattering catclaw and cacti.

West, bet. secs. 5 and 32.

Over rolling land, through scattering timber and dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$$\frac{1}{4} \frac{S 32}{S 5}$$

1934

dig pits,

18x18x12 ins., one each E. and W. of post, 3 ft. dist.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 5, 6, 31 and 32, with brass cap mkd.

T 7 S	R 6 W
S 31	S 32

S 6	S 5
-----	-----

T 8 S

1934

dig pits,

18x18x12 ins., one in each sec., 3 ft. dist.

Land, rolling.

Soil, sandy and gravelly loam, 1st rate.

Timber, scattering ironwood and palo verde.

Undergrowth, greasewood.

Survey of North Boundary of T. 8 S., R. 6 W.

Chains

West, bet. secs. 6 and 31.

Over rolling land, through scattering timber and dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S 31

S 6

1934


dig pits,

18x18x12 ins., one each E. and W. of post, 3 ft. dist.

71.68 Intersect the E. bdy. of sec. 36, T. 7 S., R. 7 W.

At point of intersection,

Set an iron post, 3 ft. long, 3 ins. diam., 28 ins. in the ground, for closing cor. of Tps. 7 and 8 S., R. 6 W., with brass cap mkd.



1934

dig pits,

18x18x12 ins., one each N., S., and E. of post, 3 ft. dist.

From point of intersection the cor. of T. 7 S., R. 7 W., only (SE.cor) hereinbefore described, bears S.0°11'E., 4.58 chs. dist.

Land, rolling.  
Soil, sandy and gravelly loam; 1st rate.  
Timber, scattering ironwood and palo verde.  
Undergrowth, greasewood.

## Survey of West Boundary of T. 9 S., R. 7 W.

BOOK 4051

Chains	
	From the standard cor. of Tps. 9 S., Rs. 7 and 8 W., described in the field notes of the independent resurvey of the 2nd Standard Parallel, South along the S. bdrs. of Tps. 9 S., Rs. 5, 6 and 7 W., executed under this group.
	North, bet. secs. 31 and 36.
	Over mountainous land, through scattering timber and brush.
	Ascend 298 ft. over SW. slope.
9.80	Spur, slopes SW.; desc. 264 ft. over N. slope.
26.00	Wash, 10 lks. wide, course S.70°E.; asc. 198 ft. over SW. slope.
30.45	Rocky spur, slopes E.; desc. 229 ft. over NE. slope.
40.00	Set a malpais stone, 6x14x20 ins., 14 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. $\frac{1}{4}$ on W. face; raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
	Descend 16 ft. over NE. slope.
44.50	Wash, 20 lks. wide, course SE.; asc. 59 ft. over SW. slope.
58.00	Spur, slopes W.; desc. 54 ft. over NW. slope.
62.65	Wash, 8 lks. wide, course SW.; asc. 46 ft. over S. slope.
80.00	Set a malpais stone, 8x12x22 ins., 18 ins. in the ground, for cor. of secs. 25, 30, 31 and 36, mkd. with 1 groove on S. face, and 5 grooves on N. face; raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
	Land, mountainous. Soil, gravelly and rocky; 4th rate, Timber, scattering palo verde and mesquite. Undergrowth, greasewood, scattering ocotillo and cacti.
	-----
	North, bet. secs. 25 and 30.
	Over mountainous land, through scattering timber and undergrowth.
	Ascend 515 ft. over S. slope.
28.40	Ridge, bears E. and W.; desc. 80 ft. over N. slope.
40.00	Set a malpais stone, 9x10x24 ins., 8 ins. in the ground, to bedrock, and in a mound of stone, for $\frac{1}{4}$ sec. cor., mkd. $\frac{1}{4}$ on W. face; raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft high, W. of cor.
	Descend 82 ft. over NW. slope.
43.80	Wash, 4 lks. wide, course NE.; asc. 25 ft. over S. slope.
45.00	Spur, slopes E.; desc. 246 ft. over N. slope.
60.10	Wash, 8 lks. wide, course NE.; asc. 26 ft. over S. slope.
62.30	Low spur, slopes E.; desc. 18 ft. over N. slope.
64.50	Wash, 5 lks. wide, course SE.; asc. 187 ft. over SE. slope.
72.00	Spur, slopes from W. to NE.; desc. 147 ft. over NW. slope.

## Survey of West Boundary of T. 9 S., R. 7 W.

Chains	
76.30	Wash, 6 lks. wide, course NE.; over rolling land.
79.30	Wash, 5 lks. wide, course E.; asc. 13 ft. over SE. slope.
80.00	Set a malpais stone, 10x12x24 ins., 18 ins. in the ground, for cor. of secs. 19, 24, 25 and 30; mkd. with 2 grooves on S. face, and 4 grooves on N. face; raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
	Land, mountainous. Soil, gravelly loam, rocky; 4th rate. Timber, scattering palo verde and mesquite. Undergrowth, greasewood, scattering ocotillo and cacti.
-----	
	North, bet. secs. 19 and 24.
	Over mountainous land, through scattering timber and undergrowth.
	Ascend 114 ft. over SE. slope.
6.10	Spur, slopes E.; desc. 225 ft. over NE. slope.
14.00	Head of gulch, course NE.; asc. 11 ft. over SE. slope.
18.60	Low spur, slopes NE.; desc. 106 ft. over NW. slope.
25.70	Wash, 10 lks. wide, course NE.; asc. 44 ft. over SE. slope.
28.40	Spur, slopes NE.; desc. 152 ft. over NW. slope.
40.00	Set a malpais stone, 8x18x20 ins., mkd. ¼ on W. face, over a cross (+) mkd. on surface rock, and in a mound of stone, for ¼ sec. cor.; raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
	Descend 27 ft. over NW. slope.
41.95	Wash, 10 lks. wide, course NE.; asc. 77 ft. over SE. slope.
47.00	Spur, slopes NE.; desc. 125 ft. over NW. slope.
55.00	Wash, 10 lks. wide, course NE.; asc. 180 ft. over SE. slope.
76.60	Spur, slopes NE.; desc. 100 ft. over NW. slope.
80.00	Set a sandstone, 6x12x30 ins., 10 ins. in the ground to bedrock, and in a mound of stone, for cor. of secs. 13, 18, 19 and 24, mkd. with 3 grooves on each of N. and S. faces; raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
	Land, mountainous. Soil, gravelly and rocky; 4th rate. Timber, scattering palo verde and mesquite. Undergrowth, greasewood, scattering ocotillo and cacti.
-----	
	North, bet. secs. 13 and 18.
	Over mountainous land, through scattering timber and undergrowth.
	Descend 57 ft. over NW. slope.
5.20	Wash, 10 lks. wide, course N. from SW.; desc. 71 ft. down wash.

## Survey of West Boundary of T. 9 S., R. 7 W.

BOOK 4051

## Chains

- 9.10 Wash, 10 lks. wide, course from S. to NE.; asc. 103 ft. over SE. slope.
- 17.00 Spur, slopes NE.; desc. 30 ft. over NW. slope.
- 19.40 Top of cliff, bears NE. and SW.; desc. 60 ft. over NW. face of cliff.
- 19.50 Base of cliff; desc. 45 ft. over NW. slope.
- 21.90 Wash, 35 lks. wide, course NE.; desc. 108 ft. along W. side of wash.
- 29.00 Wash, 35 lks. wide, course N.5°W., thence along E. side of wash.
- 34.35 Wash, 35 lks. wide, course NE.; asc. 82 ft. over SE. slope.
- 38.00 Set a malpais stone, 6x12x28 ins., mkd.  $\frac{1}{4}$  on W. face and W C on N. face, 12 ins. in the ground to bedrock, and in a mound of stone, for witness cor. to  $\frac{1}{4}$  sec. cor.
- 38.50 Base of cliff, bears NE. and SW.; asc. 200 ft. over SE. face of cliff.
- 40.00 True point for  $\frac{1}{4}$  sec. cor. falls on face of cliff where it is impracticable to monument the cor., therefore a witness cor. is established 2.00 chs. S. as described above.
- 43.62 Top of cliff, bears NE. and SW.; thence ascend slightly.
- 43.90 Spur, slopes NE.; desc. 309 ft. over NW. slope.
- 55.00 Base of hill, bears NE. and SW.; thence over rolling land.
- 74.20 Wash, 50 lks. wide, course N.70°W.
- 80.00 Set a malpais stone, 6x7x24 ins., 18 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, mkd. with 4 grooves on S. face, and 2 grooves on N. face; raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor.

Land, mountainous and rolling.  
Soil, sandy and gravelly loam and rocky; 2d and 4th rates.  
Timber, scattering palo verde, mesquite and ironwood.  
Undergrowth, greasewood, ocotillo and cacti.

-----  
North, bet. secs. 7 and 12.

Over rolling land, through scattering timber and dense undergrowth.

- 40.00 Set a granite boulder, 7x10x24 ins., 16 ins. in the ground, for  $\frac{1}{4}$  sec. cor., mkd.  $\frac{1}{4}$  on W. face;  
18x18x12 ins., one each, N. and S. of cor., 3 ft. dist. dig pits,

- 80.00 Set a granite stone, 8x8x22 ins., 16 ins. in the ground, for cor. of secs. 1, 6, 7 and 12, mkd. with 5 grooves on S. face, and 1 groove on N. face;  
18x18x12 ins., one in each sec., 3 ft. dist. dig pits,

Land, rolling.  
Soil, sandy and gravelly loam, 1st and 2d rates.  
Timber, palo verde, mesquite and ironwood.  
Undergrowth, greasewood, ocotillo and cacti.

-----



Survey of West Boundary of T. 9 S., R. 7 W.

Chains


North, bet. secs. 1 and 6.

Over rolling land, through scattering timber and dense undergrowth.

40.00 Set a malpais stone, 8x10x24 ins., 18 ins. in the ground, for 1/4 sec. cor., mkd. 1/4 on W. face;

18x18x12 ins., one each N. and S. of cor., 3 ft. dist. dig pits,

80.00 Set an iron post, 3 ft. long; 3 ins. diam.; 28 ins. in the ground, for cor. of Tps. 8 and 9 S., Rs. 7 and 8 W., with brass cap mkd.



1934

18x18x12 ins., one each NE., SE., SW. and NW. of post, 3 ft. dist. dig pits,

Land, rolling.  
Soil, sandy and gravelly loam, 1st and 2d rates.  
Timber, scattering palo verde, mesquite and ironwood.  
Undergrowth, greasewood, ocotillo and cacti.

## Survey of North Boundary of T. 9 S., R. 7 W. BOOK 4051

Chains	
	From the cor. of Tps. 8 and 9 S., Rs. 6 and 7 W., West, on a random line, making proper offsets to the N. from the tangent to the parallel at intervals of 40.00 chs., setting temp. $\frac{1}{4}$ sec. and secs., cor.s., along the line bet. Tps. 8 and 9 S., Rs. 7 W.
479.55	Intersect N. and S. line 42 lks. N. of the cor. of Tps. 8 and 9 S., Rs. 7 and 8 W.  Return to the cor. of Tps. 8 and 9 S., Rs. 6 and 7 W., hereinbefore described,  Thence S.89°57'W., on true line bet. secs. 1 and 36.  Over rolling land, through scattering timber and dense undergrowth:
40.00	Set a malpais stone, 6x12x24 ins., 18 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. $\frac{1}{4}$ on N. face;  18x18x12 ins., one each E. and W. of cor., 3 ft. dist. dig pits,
60.40	Road, bears NW. and SE.
80.00	Set a malpais stone, 8x8x22 ins., 16 ins. in the ground, for cor. of secs. 1, 2, 35 and 36, mkd. with 1 groove on E. face, and 5 grooves on W. face;  of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. raise a mound
	Land, rolling. Soil, sandy and gravelly loam, 1st rate. Timber, scattering ironwood, mesquite and palo verde. Undergrowth, greasewood, scattering catclaw and cacti.
	----- S.89°57'W., on true line bet. secs. 2 and 35.  Over rolling land, through scattering timber and dense undergrowth:
9.60	Base of rocky hill, bears N. and S., asc. 55 ft. over E. slope.
11.40	Top of hill, bears N. and S.; desc. 29 ft. over W. slope.
20.40	Wash, 5 lks. wide, course SE.; asc. 82 ft. over SE. slope.
28.60	Spur, slopes from N.80°W., to SE.; desc. 86 ft. along S. slope.
40.00	Set a granite stone, 6x16x22 ins., 17 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. $\frac{1}{4}$ on N. face;  of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor. raise a mound Asc. 31 ft. along gradual S. slope.
80.00	Set a malpais stone, 8x10x22 ins., 17 ins. in the ground, for cor. of secs. 2, 3, 34 and 35, mkd. with 2 grooves on E. face, and 4 grooves on W. face;  of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. raise a mound
	Land, rolling: Soil, sandy and gravelly; stony; 2d rate. Timber, scattering ironwood, mesquite and palo verde. Undergrowth, greasewood, scattering catclaw and cacti.

## Survey of North Boundary of T. 9 S., R. 7 W.

Chains	S.89°57'W., on true line bet. secs. 3 and 34. Over rolling land, through scattering timber and dense undergrowth. Descend 12 ft. along S. slope.
15.00	Leave gentle descent, thence over nearly level land.
22.40	Wash, 20 lks. wide, course NW.
36.10	Wash, 100 lks. wide, course NW.
40.00	Set a malpais stone, 6x12x22 ins., 17 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. $\frac{1}{4}$ on N. face; dig pits, 18x18x12 ins., one each E. and W. of cor., 3 ft. dist.
80.00	Set a malpais stone, 6x10x24 ins., 18 ins. in the ground, for cor. of secs. 3, 4, 33 and 34, mkd. with 3 grooves on each of E. and W. faces; raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. Land, rolling and nearly level. Soil, sandy and gravelly loam; 1st and 2d rates. Timber, scattering ironwood, mesquite and palo verde. Undergrowth, greasewood, scattering catclaw and cacti.
-----	
	S.89°57'W., on true line bet. secs. 4 and 33. Over gently rolling land, through scattering timber and dense undergrowth.
40.00	Set a malpais stone, 6x12x22 ins., 16 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. $\frac{1}{4}$ on N. face; dig pits, 18x18x12 ins., one each E. and W. of cor., 3 ft. dist.
75.20	Road, bears N. and S.
80.00	Set a malpais stone, 6x10x24 ins., 18 ins. in the ground, for cor. of secs. 4, 5, 32 and 33, mkd. with 4 grooves on E. face and 2 grooves on W. face; raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. Land, rolling. Soil, sandy and gravelly loam; 1st and 2d rates. Timber, scattering ironwood, mesquite and palo verde. Undergrowth, greasewood, scattering catclaw and cacti.
-----	
	S.89°57'W., on true line bet. secs. 5 and 32. Over rolling land, through scattering timber and dense undergrowth.
40.00	Set a malpais stone, 8x12x20 ins., 15 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. $\frac{1}{4}$ on N. face; dig pits, 18x18x12 ins., one each E. and W. of cor., 3 ft. dist.
80.00	Set a malpais stone, 8x14x20 ins., 15 ins. in the ground, for cor. of secs. 5, 6, 31 and 32, mkd. with 5 grooves on E. face and 1 groove on W. face; dig pits, 18x18x12 ins., one in each sec., 3 ft. dist.

## Survey of North Boundary of T. 9 S., R. 7 W.

BOOK 4051

## Chains

Land, rolling.  
 Soil, sandy and gravelly loam; 1st and 2d rates.  
 Timber, scattering ironwood, mesquite and palo verde.  
 Undergrowth, greasewood, scattering catclaw and cacti.

S.89°57'W., on true line bet. secs. 6 and 31.

Over rolling land, through scattering timber and dense undergrowth.

40.00

Set a malpais stone, 8x10x26 ins., 19 ins. in the ground, for  $\frac{1}{4}$  sec. cor., mkd.  $\frac{1}{4}$  on N. face;

18x18x12 ins., one each E. and W. of cor., 3 ft. dist. dig pits,

79.55

The cor. of Tps. 8 and 9 S., Rs. 7 and 8 W., hereinbefore described.

Land, rolling.  
 Soil, sandy and gravelly loam; 1st and 2d rates.  
 Timber, scattering ironwood, mesquite and palo verde.  
 Undergrowth, greasewood, scattering catclaw and cacti.

Survey of West Boundary of T. 8 S., R. 7 W.

Chains

From the cor. of Tps. 8 and 9 S., Rs. 7 and 8 W., herein-  
before described,

North, bet. secs. 31 and 36.

Over rolling land, through scattering timber and dense  
undergrowth.

40.00 Set a granite stone, 8x12x30 ins., 24 ins. in the ground,  
for  $\frac{1}{4}$  sec. cor., mkd.  $\frac{1}{4}$  on W. face;

18x18x12 ins., one each N. and S. of cor., 3 ft. dist. dig pits,

80.00 Set a granite stone, 8x10x36 ins., 28 ins. in the ground,  
for cor. of secs. 25, 30, 31 and 36, mkd. with 1 groove  
on S. face and 5 grooves on N. face;

18x18x12 ins., one in each sec., 3 ft. dist. dig pits,

Land, rolling.

Soil, sandy and gravelly loam; 1st and 2d rates.

Timber, scattering ironwood, mesquite and palo verde.

Undergrowth, greasewood, mesquite and cacti.

North, bet. secs. 25 and 30.

Over rolling land, through scattering timber and dense  
undergrowth.

40.00 Set a granite stone, 6x8x30 ins., 24 ins. in the ground,  
for  $\frac{1}{4}$  sec. cor., mkd.  $\frac{1}{4}$  on W. face;

18x18x12 ins., one each N. and S. of cor., 3 ft. dist. dig pits,

80.00 Set a granite stone, 8x12x26 ins., 20 ins. in the ground,  
for cor. of secs. 19, 24, 25 and 30, mkd. with 2 grooves  
on S. face and 4 grooves on N. face;

18x18x12 ins., one in each sec., 3 ft. dist. dig pits,

Land, rolling.

Soil, sandy and gravelly loam; 1st and 2d rates.

Timber, greasewood, scattering catclaw and cacti.

North, bet. secs. 19 and 24.


Over rolling land, through scattering timber and dense  
undergrowth.

4.60 Road, bears NW. and SE.

40.00 Set a granite stone, 8x8x27 ins., 20 ins. in the ground,  
for  $\frac{1}{4}$  sec. cor., mkd.  $\frac{1}{4}$  on W. face;

18x18x12 ins., one each N. and S. of cor., 3 ft. dist. dig pits,

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in  
the ground, for cor. of secs. 13, 18, 19 and 24, with  
brass cap mkd.



1934

## Survey of West Boundary of T. 8 S., R. 7 W.,

BOOK 4051

Chains

dig pits,

18x18x12 ins., one in each sec., 3 ft. dist.

Land, rolling.

Soil, sandy and gravelly loam, 1st and 2d rates.


Timber, scattering ironwood, mesquite and palo verde.

Undergrowth, greasewood, scattering catclaw and cacti.

North, bet. secs. 13 and 18.

Over rolling land, through scattering timber and dense undergrowth.


11.90 Wash, 10 lks. wide, course NW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

dig pits,

18x18x12 ins., one each N. and S. of post, 3 ft. dist.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, with brass cap mkd.



1934

dig pits,

18x18x12 ins., one in each sec., 3 ft. dist.

Land, rolling.

Soil, sandy and gravelly loam, 1st and 2d rates.

Timber, scattering ironwood, mesquite and palo verde.

Undergrowth, greasewood, scattering catclaw and cacti.

North, bet. secs. 7 and 12.

Over rolling land, through scattering timber and dense undergrowth.

40.00 Set a malpais stone, 8x8x20 ins., 15 ins. in the ground, for  $\frac{1}{4}$  sec. cor., mkd.  $\frac{1}{4}$  on W. face;

dig pits,

18x18x12 ins., one each N. and S. of cor., 3 ft. dist.

80.00 Set a granite stone, 8x12x24 ins., 18 ins. in the ground, for cor. of secs. 1, 6, 7 and 12, mkd. with 5 grooves on S. face and 1 groove on N. face;

dig pits,

18x18x12 ins., one in each sec., 3 ft. dist.

Survey of West Boundary of T. 8 S., R. 7 W.

Chains

Land, rolling.  
Soil, sandy and gravelly loam, 1st and 2d rates.  
Timber, scattering ironwood, mesquite and palo verde.  
Undergrowth, greasewood, scattering catclaw and cacti.

North, bet. secs. 1 and 6.

Over rolling land, through scattering timber and dense undergrowth.


22.20 Road, bears NW. and SE.

40.00 Set a granite stone, 6x8x32 ins., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., mkd.  $\frac{1}{4}$  on W. face; dig pits, 18x18x12 ins., one each N. and S. of cor., 3 ft. dist.

76.72 Intersect S. bdy. of sec. 36, T. 7 S., R. 8 W.

At point of intersection,

Set an iron post, 3 ft. long, 3 ins. diam., 28 ins. in the ground, with a malpais stone 10x10x11 ins., mkd. with a cross (+) and a glass bottle deposited at base, for closing cor., of Tps. 8 S., Rs. 7 and 8 W., with brass cap mkd.



From point of intersection the cor. of T. 7 S., Rs. 7 and 8 W., hereinbefore described, bears East 8.43 chs. dist.

Land, rolling.  
Soil, sandy and gravelly loam; 1st and 2d rates.  
Timber, scattering ironwood, mesquite and palo verde.  
Undergrowth, greasewood, scattering catclaw and cacti.

## FINAL TESTS OF SOLAR ATTACHMENTS.

February 23, 1934; At Gila Bend, Arizona, on the meridian hereinbefore described with instruments, Nos. 9988, 20133, and 10127, at 8h 30m A.M.; app. t., we set off  $32^{\circ}56\frac{1}{2}'N.$ , on the lat. arcs;  $9^{\circ}53\frac{1}{2}'S.$ , on the decl. arcs; and orient the instruments with the solars; the line of sight agrees with the meridian established by Polaris observation. At 4h 30m p.m., app. t., we set off  $32^{\circ}56\frac{1}{2}'N.$ , on the lat. arcs;  $9^{\circ}47\frac{1}{2}'S.$ , on the decl. arcs; and repeat the tests of the solars; the line of sights agree with the meridian established by Polaris observation.

February 23, 1934.

## GENERAL DESCRIPTION

The land along the boundaries of Tps. 6, 7, 8 and 9 S., Rs. 5, 6, and 7 W., consists of desert and rough mountains; the general elevation is about 2,500 ft. above sea level; the highest mountains rise somewhat more than 1,000 ft. above the desert.

The soil in the valleys and plains is generally sandy loam and volcanic ash of 1st and 2d rates, while the soil in the mountainous region is sandy and rocky of 3d and 4th rates.

The timber consists of scattering palo verde, ironwood, and mesquite. The undergrowth is greasewood, catclaw, ocotillo and cacti.


The Tucson, Cornelia and Gila Bend Railroad traverses through Tps. 6, 7, 8 and 9 S., Rs. 5 and 6 W.

There are no known settlers or water within this survey. No mineral indications have been found.



DIAGRAM.

BOOK 4051

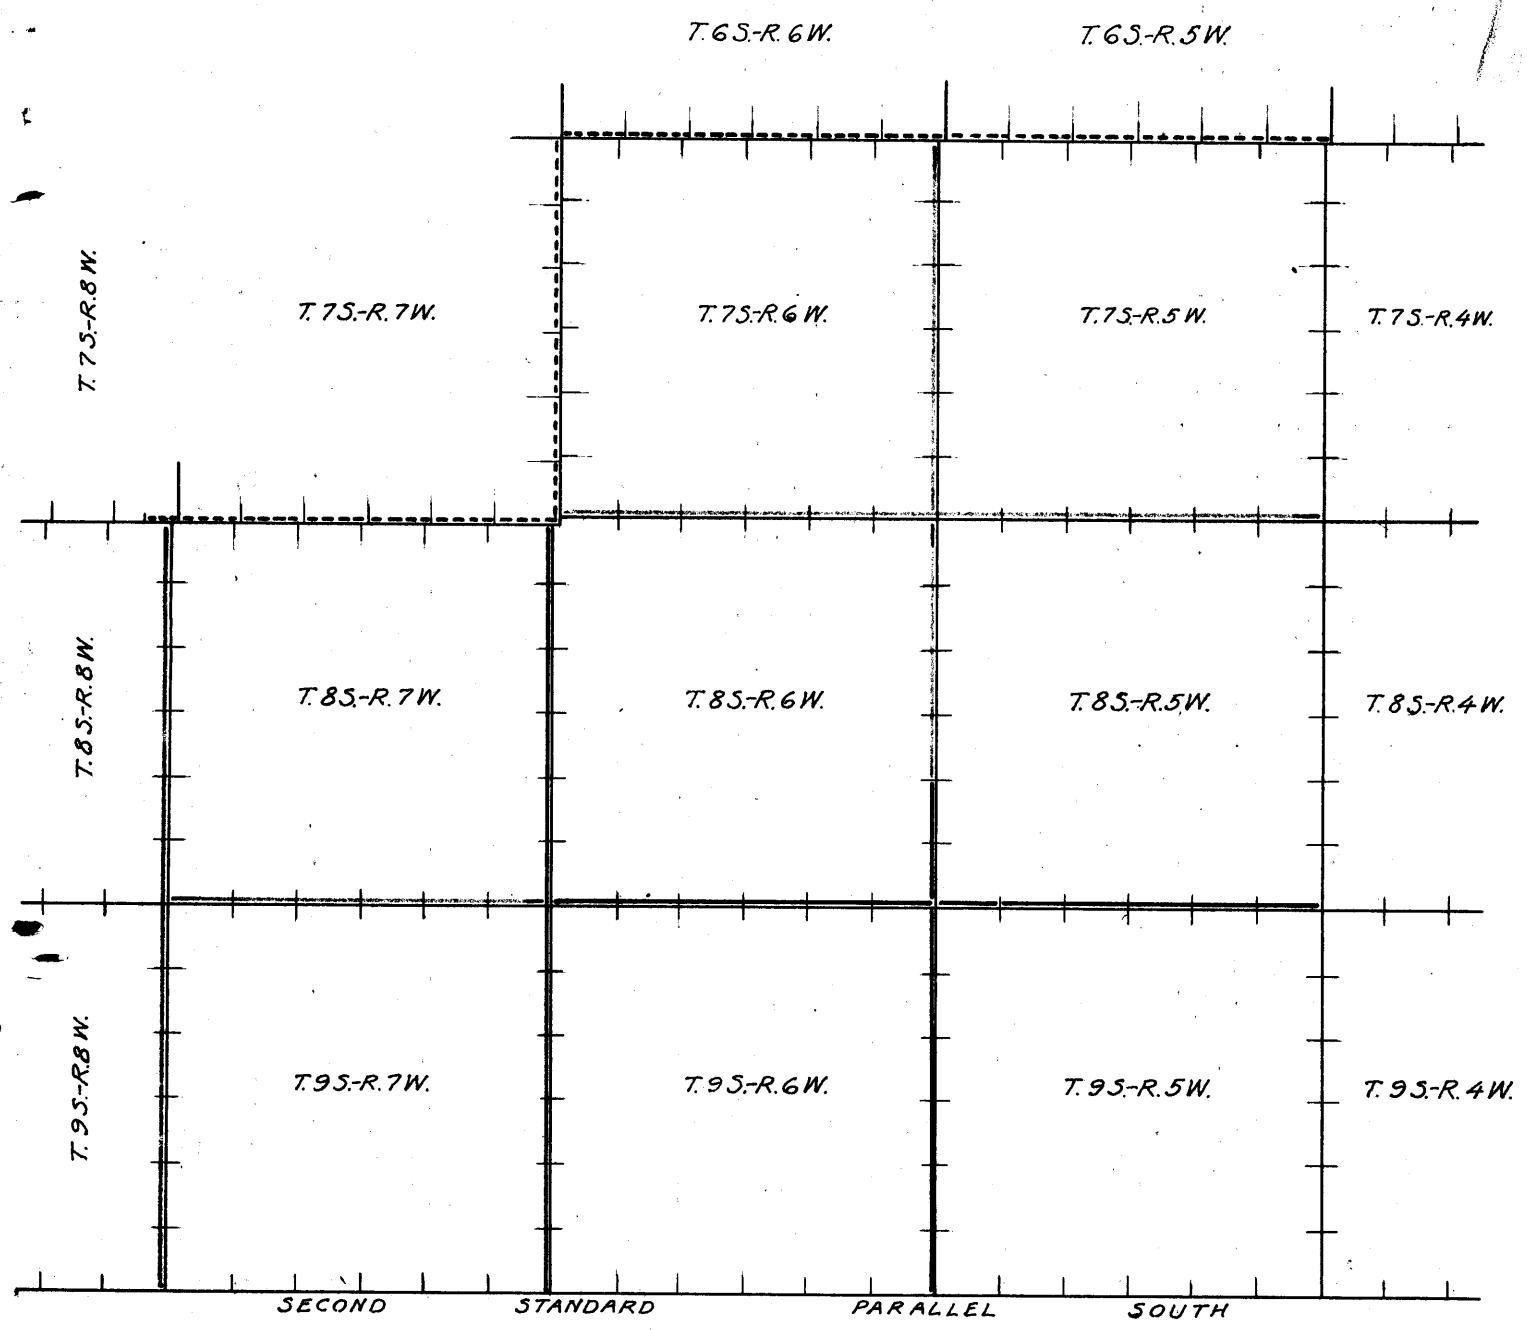

- Surveyed by Geo. M. Kurtzweil, U.S. Cadastral Eng'r.
- Resurveyed by Geo. M. Kurtzweil, U.S. Cadastral Eng'r.
- Surveyed by Alex. T. Harris, U.S. Cadastral Eng'r.
- Surveyed by Walter H. Good, U.S. Surveyor.
- Resurveyed by Walter H. Good, U.S. Surveyor.

BOOK 4081

4-680  
(August, 1926)

**FIELD ASSISTANTS.**  
to

Walter H. Good, U. S. Surveyor

NAMES.	CAPACITY.
Bert E. Wakeman	1st Chainman
H. A. Weedon	2nd Chainman
John Ludtke	2nd Chainman
Ed. A. Kyle	2nd Chainman
Albert Blevins	Flagman
Albert Jennings	Axman
Priest High	Cornerman

96 218

ECOK 4051

CERTIFICATE OF UNITED STATES SURVEYOR

I, Walter H. Good U.S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Arizona bearing date of the 12th day of December, 1933, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, resurveyed all those parts or portions of the South boundaries of T.6 S., R.5 W.; T.7 S., R.7 W.; and T.7 S., R.8 W. and the East boundary of T.7 S., R.7 W. and surveyed all those parts or portions of the West boundaries of T.9 S., R.7 W.; T.8 S., R.5 W.; T.8 S., R.7 W. and T.7 S., R.5 W., and the North boundaries of T.9 S., R.7 W.; T.8 S., R.5 W. and T.8 S., R.6 W. of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said resurvey and survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such resurvey and survey.

Walter H. Good U.S. Surveyor

APPROVAL

Office of U. S. Supervisor of Surveys,

....., 19.....

The foregoing field notes of the survey of .....

.....  
.....  
.....  
.....  
.....  
.....

executed by ..... under his special instructions dated ....., 19....., having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above-described surveys in ..... has been correctly copied from the original notes on file in this office.

U. S. Supervisor of Surveys.

219  
97

4-680  
(August, 1926)

BOOK 4051

FIELD ASSISTANTS.

to

Alex T. Harris, U. S. Cadastral Engineer

NAMES.	CAPACITY.
Bert E. Wakeman	1st Chainman
H. A. Weedon	2nd Chainman
John Ludtke	2nd Chainman
R. J. Lavery	2nd Chainman
Albert Blevins	Flagman
Albert Jennings	Axman
Priest High	Cornerman

98 220  
BOOK 4051

CERTIFICATE OF UNITED STATES SURVEYOR

I, Alex T. Harris, U.S. Cadastral Engineer, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Arizona

bearing date of the 12th day of December, 1933, I have well, faithfully, and truly

in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of

the West boundaries of Township 9 South, Range 5 West

Township 9 South, Range 6 West

Township 8 South, Range 5 West

Township 8 South, Range 6 West

and North boundary of Township 9 South, Range 5 West of the Gila and Salt

River Base and Meridian, in the State of Arizona, which are represented in

the foregoing field notes as having been executed by me, and under my direction; and that all the corners of

said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instruc-

tions, and the special written instructions of the District Cadastral Engineer for Arizona

and in the specific manner described in the field notes, and that the foregoing are the original field notes of

such survey.

Alex T. Harris  
U.S. Cadastral Engineer

APPROVAL

Office of U. S. Supervisor of Surveys,

....., 10

The foregoing field notes of the survey of

.....  
.....  
.....  
.....  
.....  
.....

executed by

under his special instructions dated ....., 10, having been

critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above described surveys in

....., has been correctly copied from the original notes on file in this office.

U. S. Supervisor of Surveys.

BOOK 4051

4-680  
(August, 1926)

**FIELD ASSISTANTS.**  
to

George M. Kurtzweil, U. S. Cadastral Engineer

NAMES.	CAPACITY.
John H. McVey	1st Chainman
Roy A. Drake	2nd Assistant
G. B. Ruiz	Flagman
J. C. Bigger	Flagman
George W. Bellas	Cornerman
A. C. Bucher	Cornerman
E. M. Heathington	Axman
Ed. Storey	Axman

100 222  
BOOK 4051

CERTIFICATE OF UNITED STATES SURVEYOR

I, George M. Kurtzweil U.S. Cadastral Engineer, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Arizona bearing date of the 12th day of December, 1933, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, resurveyed all those parts or portions of the South boundary of Township 6 South, Range 6 West and surveyed all those parts or portions of the North boundaries of Townships 9 South, Ranges 5 and 6 West of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said resurvey and survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such resurvey and survey.

*George M. Kurtzweil*  
U.S. Cadastral Engineer.

APPROVAL

OFFICE OF U. S. SUPERVISOR OF SURVEYS,  
Denver, Colorado, May 16, 1935.

The foregoing field notes of the resurvey of the South boundaries of T.6 S., R.5 W.; T.6 S., R.6 W., and T.7 S., R.7 W.; the East boundary of T.7 S., R.7 W., and part of the South boundary of T.7 S., R.8 W. and of the survey of the West boundaries of T.7 S., R.5 W. and T.8 S., R.7 W. and the West and North boundaries of T.8 S., R.5 W.; T.8 S., R.6 W.; T.9 S., R.5 W.; T.9 S., R.6 W.; and T.9 S., R.7 W. of the Gila and Salt River Base and Meridian, in the State of Arizona executed by Walter H. Good, U.S. Surveyor, Alex T. Harris and George M. Kurtzweil, U.S. Cadastral Engineers.

under special instructions dated December 12, 1933- Group 199, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the resurveys and surveys they describe, are hereby approved.

*Walter H. Good*  
U. S. Supervisor of Surveys.

~~I certify that the foregoing transcript of the field notes of the above-described surveys in~~  
~~has been correctly copied from the original notes on file in this office.~~

~~U. S. Supervisor of Surveys.~~