

# FIELD NOTES

OF THE SURVEY OF THE

SUBDIVISION LINES of

Township 7 South, Range 6 West

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

### EXECUTED BY

Ben D. Procter, Robt. H. Williams, R. E. McMahan

Frank C. Mulford and Gilden Redewill

Temporary Transistmen

In the capacity of U. S. Surveyor, under Special Instructions dated December 12, 1933, issued by the District Cadastral Engineer to govern surveys included in Group No. 199, Arizona, which were approved by the Commissioner of the General Land Office, February 17, 1934, and Assignment Instructions dated December 15, 1933, February 2, 1934.

Survey commenced December 28, 1933


Survey completed February 9, 1934

4053

4053

# INDEX DIAGRAM.

*Township* ..... , *Range* .....

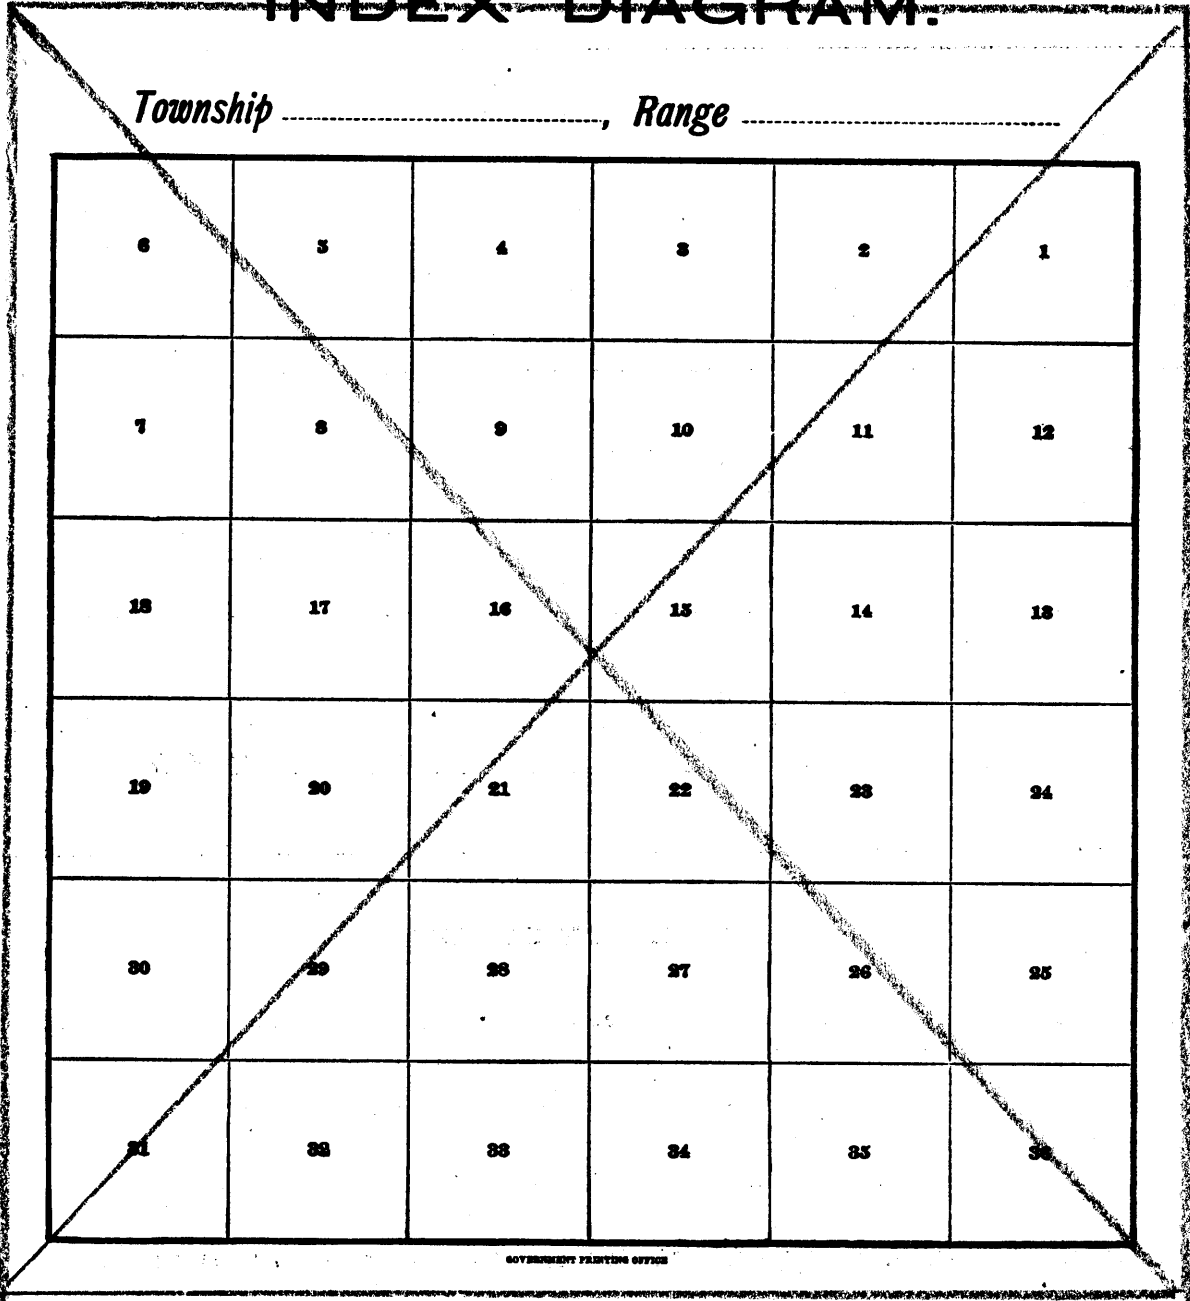

INDEX-DIAGRAM.

T. 65.-R. 6W.

	31	32	33	34	35	36
	6 34 35 34	5 26 27 34 33	4 21 26	3 15 20	2 8 14	1 7
12	7 33 33	8 26 25 32	9 20 25	10 14 19	11 7 13	12 6
13	18 32 31 31	17 25 24 31	16 19 24	15 13 18	14 6 12	13 5
24	19 30 30	20 24 23 29	21 18 23	22 11 17	23 5 11	24 4
25	30 29 28 28	29 23 22 27	28 17 16 22	27 10 16	26 3 9	25 2
36	31 27	32 22 21	33 15	34 9 8	35 2 1	36

Accepted surveys.

Surveyed under this group. (Exterior Field Notes in Book "B")

Resurveyed under this group. (Field Notes in Book "B")

Areas surveyed as per accepted plats on file.

## SUBDIVISION OF T.7 S., R.6 W.

BOOK 4053

## Chains

The subdivisional survey of T.7 S., R.6 W., was executed with Young & Sons transits Nos. 8477, 8584 and 8588, and W. & L.E. Gurley transit No. 20117, and Keuffel & Esser transit No. 9699, used by Ben D. Procter, Robt H. Williams, R.E. McMahan, Frank C. Mulford and Gilden Redewill, Temporary Transitmen. The instruments are constructed in accordance with the standard specifications of the General Land Office and have full vertical circles with verniers reading to single minutes, which is also the least count of the two verniers of the horizontal limb of each instrument. The transits were in good condition, and having been placed in satisfactory adjustment prior to beginning the survey, and found free from appreciable error, were approved by the district cadastral engineer on Dec. 15, 1933.

The types of land, timber and undergrowth in T.7 S., R.6 W., offer few objections to projection of lines by back and foresight method; that method is selected in view of the unfamiliarity of the instrumentmen with the solar attachments with which the instruments are equipped.

Lines are initiated from the S. bdy. of the Tp., which line was carefully surveyed at this time with instruments tested as described in notes of that line. The true bearings of all lines are checked by repetition of angles, double back and foresights and occasional direct altitude observations on the sun for azimuth, and where feasible, by check of the azimuths initiated at different points on the S. bdy. against each other.

The measurements were made with Lallie and Lufkin steel tapes, 5 chs. in length, graduated every link for the first 100 lks. and the balance at intervals of 10 lks. The tapes were tested by comparison with a Lufkin standard and found correct. The measurements are made on the slope; the vertical angle of each interval is ascertained with a clinometer in good adjustment; the horizontal equivalents are entered in the field note record.

## SURVEY

Beginning at the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., established under this Group, described in notes of that line,

N.0°01'W., bet. secs. 35 and 36.

Desc. 30 ft. over rocky NW. slope; through scattering timber and undergrowth.

- 1.50 Base of hill, bears NE. and SW.; over gently rolling land.  
 26.00 Wash, 15 lks. wide, course NE.  
 29.10 Begin ascent of 135 ft. over SE. slope.  
 35.90 Hill, bears E. and W.; desc. 55 ft. over NE. slope.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground to bedrock, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$   
 S35 | S36  
 1934

raise a mound of

SUBDIVISION OF T.7 S., R.6 W.

Chains

stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Desc. 57 ft. over N. slope.

43.30 Foot of hill, bears E. and W.; over gently rolling land.

67.00 Wash, 15 lks. wide, course SW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 25, 26, 35 and 36, with brass cap mkd.

T7S R6W

S26 | S25

S35 | S36

1934

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land: hilly and rolling.

Soil: sandy and gravelly loam, 1st rate and rocky, 3rd rate.

Timber: ironwood, mesquite and palo verde.

Undergrowth: greasewood, ocotillo and cactus.

East, on random line, bet. secs. 25 and 36.

40.00 Set temp. 1/2 sec. cor.

79.96 Intersect the E. bdy. of the Tp., 5 lks. N. of the cor. of secs. 25, 30, 31 and 36, established under this Group, described in notes of that line.

Thence

N. 89° 58' W., on true line, bet. secs. 25 and 36.

Asc. 15 ft. over NE. slope; through scattering timber and undergrowth.

7.70 Ridge, bears NW. and SE.; desc. 30 ft. over W. slope.

15.10 Wash, 10 lks. wide, course S.; asc. 57 ft. over E. slope.

25.00 Spur, slopes SE.; desc. 50 ft. over SW. slope.

29.75 Wash, 10 lks. wide, course SE.; over gently rolling land.

39.98 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for sec. cor., with brass cap mkd.

S 25

S 36

1934

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

Asc. 47 ft. over SE. slope.

47.30 Spur, slopes NE.; desc. 32 ft. over NW. slope.

53.70 Wash, 10 lks. wide, course NE.; asc. 40 ft. over NE. slope.

## SUBDIVISION OF T.7 S., R.6 W.

3  
BOOK 4053

Chains

70.65 Ridge, bears N. and SE.; desc. 50 ft. over W. slope.

76.75 Wash, 10 lks. wide, course NW.; asc. 6 ft.

79.96 The cor. of secs. 25, 26, 35 and 36.

Land: rolling and hilly.  
Soil: sandy and gravelly loam, rocky, 2nd rate.  
Timber: ironwood, mesquite and palo verde.  
Undergrowth: greasewood, ocotillo and cactus.

N.0°01'W., bet. secs. 25 and 26.

Over rolling land; through scattering timber and dense undergrowth.

4.00 Wash, 10 lks. wide, course NW.; asc. 43 ft. over S. slope.

18.20 Wash, 20 lks. wide, course S.75°W.; asc. 105 ft. over SW. slope.

31.30 Rocky spur, slopes SW.; over broken W. slope.

36.30 Ridge, bears NW. and SE.; desc. 48 ft. over NE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground to bedrock; and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.
$$\begin{array}{c} \frac{1}{4} \\ | \\ \text{S26} | \text{S25} \\ | \\ 1934 \end{array}$$

raise a mound of  
stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor.

Desc. 57 ft. over NE. slope.

43.80 Gulch, course E.; asc. 113 ft. over SE. slope.

54.40 Spur, slopes E.; desc. 88 ft. over N. slope.

66.70 Wash, 20 lks. wide, course N.20°E.; asc. 150 ft. over SE. slope.

74.10 Spur, slopes NE.; desc. 97 ft. over NW. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 23, 24, 25 and 26, with brass cap mkd.

$$\begin{array}{c} \text{T7S R6W} \\ \text{S23} | \text{S24} \\ \text{S26} | \text{S25} \\ | \\ 1934 \end{array}$$

raise a mound of  
stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor.

Land: rolling.  
Soil: sandy loam, gravelly and rocky, 2nd and 3rd rates.  
Timber: ironwood, mesquite and palo verde.  
Undergrowth: greasewood, ocotillo and cactus.

SUBDIVISION OF T.7 S., R.6 W.

Chains	
	S.89°58'E., on random line, bet. secs. 24 and 25.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.00	Intersect the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp., established under this Group, described in notes of that line.
	Thence
	N.89°58'W., on true line, bet. secs. 24 and 25.
	Over gently rolling land; through scattering timber and dense undergrowth.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{2} \text{S24}$ $\frac{1}{2} \text{S25}$
	1934
	dig pits, 18 x 18 x 12 ins., E. and W. of post, 3 ft. dist.
57.30	Begin ascent of 57 ft. over gradual NE. slope.
69.35	Wash, 20 lks. wide, course N.30°E.; asc. 95 ft. over E. slope.
77.00	Spur, slopes NE.; desc. 30 ft. over NW. slope.
80.00	The cor. of secs. 23, 24, 25 and 26.
	Land: rolling and hilly. Soil: sandy and gravelly loam, 1st and 3rd rate. Timber: ironwood, mesquite and palo verde. Undergrowth: greasewood, ocotillo and cactus.
-----	
	N.0°01'W., bet. secs. 23 and 24.
	Desc. 77 ft. over N. slope; through scattering timber and undergrowth.
7.10	Wash, 10 lks. wide, course E.; over rolling E. slope.
19.80	Wash, 10 lks. wide, course NE.; asc. 10 ft.
25.20	Spur, slopes NE.; desc. 35 ft. over N. slope.
31.60	Wash, 10 lks. wide, course NE.; over rolling E. slope.
38.80	Wash, 10 lks. wide, course SE.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4}$ $\text{S23} \mid \text{S24}$ $1934$
	raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
	Asc. 115 ft. over SW. slope.

## SUBDIVISION OF T.7 S., R.6 W.

BOOK 4053

Chains  
 48.30 Rocky spur, slopes SE.; desc. 43 ft. over NE. slope.  
 60.80 Wash, 20 lks. wide, course NE.; over gradual SE. slope.  
 64.10 Low spur, slopes NE.; desc. 50 ft. over NE. slope.  
 69.70 Wash, 10 lks. wide, course NE.  
 71.20 Wash, 10 lks. wide, course E.; asc. gently.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 13,14,23 and 24, with brass cap mkd.

T7S	R6W
S14	S13
S23	S24

1934

raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land: hilly and rolling.  
 Soil: sandy and gravelly loam, 1st and 3rd rates.  
 Timber: ironwood, mesquite and palo verde.  
 Undergrowth: greasewood, ocotillo and cactus.

S.89°58'E., on random line, bet. secs. 13 and 24.

40.00 Set temp. ¼ sec. cor.  
 80.00 Intersect E. bdy. of the Tp., 2 lks. S. of the cor. of secs. 13,18,19 and 24, established under this Group, described in notes of that line.  
 Thence  
 N.89°59'W., on true line, bet. secs. 13 and 24.  
 Over gently rolling land; through scattering timber and dense undergrowth.  
 31.90 Wash, 20 lks. wide, course NW.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for ¼ sec. cor., with brass cap mkd.

1/4	S13
1/4	S24

1934

raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

42.30 Wash, 20 lks. wide, course N.20°W.  
 60.00 Wash, 10 lks. wide, course N.20°W.  
 69.30 Wash, 10 lks. wide, course N.20°E.  
 76.30 Wash, 10 lks. wide, course NE.  
 80.00 The cor. of secs. 13,14,23 and 24.

Land: gently rolling.



6.

## SUBDIVISION OF T.7 S., R.6 W.

## Chains

Soil: sandy and gravelly loam, 1st and 2nd rates.  
 Timber: ironwood, mesquite and palo verde.  
 Undergrowth: greasewood, ocotillo and cactus.

N.0°01'W., bet. secs. 13 and 14.

Over gently rolling land; through scattering timber and dense undergrowth.

- 0.50 Wash, 10 lks. wide, course NE.  
 3.00 Wash, 10 lks. wide, course NW.  
 19.60 Wash, 20 lks. wide, course NE.  
 25.75 Wash, 10 lks. wide, course N.70°E.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bedrock, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$   
 S14 | S13  
 1934

raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor.

- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the ground, and in a mound of stone to top, for cor. of secs. 11, 12, 13 and 14, with brass cap mkd.

T7S, R6W  
 S11 | S12  
 S14 | S13  
 1934

raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor.

Land: gently rolling.  
 Soil: sandy and gravelly loam, rocky, 2nd. rate.  
 Timber: ironwood, mesquite and palo verde.  
 Undergrowth: greasewood, ocotillo and cactus.

S.89°59'E., on random line, bet. secs. 12 and 13.

- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.00 Intersect the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp., established under this Group, described in notes of that line.

Thence

N.89°59'W., on true line, bet. secs. 12 and 13.

Over gently rolling land; through scattering timber and dense undergrowth.

- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

## SUBDIVISION OF T.7 S., R.6 W.

BOOK 4058

Chains

S12

S13

1934

raise a mound of  
stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.

65.50 Wash, 20 lks. wide, course N.

80.00 The cor. of secs. 11,12,13 and 14.

Land: gently rolling.

Soil: sandy and gravelly loam, 1st rate.

Timber: ironwood, mesquite and palo verde.

Undergrowth: greasewood, ocotillo and cactus.

N.0°01'W., bet. secs. 11 and 12.

Over gently rolling land; through scattering timber and dense undergrowth.

16.00 Wash, 20 lks. wide, course NW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd. $\frac{1}{4}$ 

S11 | S12

1934

dig pits, 18 x  
18 x 12 ins., N. and S. of post, 3 ft. dist.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 1,2,11 and 12, with brass cap mkd.

T7S R6W

S2 | S1

S11 | S12

1934

dig pits, 18 x  
18 x 12 ins., one in each sec., 3 ft. dist.

Land: gently rolling.

Soil: sandy and gravelly loam, 1st and 2nd rates.

Timber: ironwood, mesquite and palo verde.

Undergrowth: greasewood, ocotillo and cactus.

S.89°59'E., on random line, bet. secs. 1 and 12.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.00 Intersect the cor. of secs. 1,6,7 and 12, on the E. bdy. of the Tp., established under this Group, described in notes of that line.

Thence

N.89°59'W., on true line, bet. secs. 1 and 12.

Over gently rolling land; through scattering timber and dense undergrowth.

10.00 Wash, 10 lks. wide, course N.10°E.

## SUBDIVISION OF T.7 S., R.6 W.

Chains  
40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$$\begin{array}{r} S 1 \\ \frac{1}{4} S 12 \end{array}$$

1934

18 x 12 ins., E. and W. of post, 3 ft. dist. dig pits, 18 x

80.00 The cor. of secs. 1, 2, 11 and 12.

Land: gently rolling.

Soil: sandy and gravelly loam, 1st rate.

Timber: ironwood, mesquite and palo verde.

Undergrowth: greasewood, ocotillo and cactus.

-----  
North, on random line, bet. secs. 1 and 2.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

76.56 Intersect the cor. of secs. 1 and 2, only, on the N. bdy. of the Tp., established under this Group, described in notes of resurvey of S. bdy. of T.6 S., R.6 W.

Thence

South, on true line, bet. secs. 1 and 2.

Over gently rolling land; through scattering timber and dense undergrowth.

36.56 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ S 2 | S 1 \end{array}$$

1934

18 x 12 ins., N. and S. of post, 3 ft. dist. dig pits, 18 x

76.56 The cor. of secs. 1, 2, 11 and 12.

Land: gently rolling.

Soil: sandy and gravelly loam, 1st rate.

Timber: ironwood, mesquite and palo verde.

Undergrowth: greasewood and scattering cacti.

-----  
From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp., established under this Group, described in notes of that line,

N.0°01'W., bet. secs. 34 and 35.

Over flat; through scattering timber and dense undergrowth.

10.00 Begin ascent of 56 ft. over gradual SW. slope.

36.30 Hill, bears NW. and SE.; desc. 21 ft. over NE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bedrock, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

SUBDIVISION OF T.7 S., R.6 W.

1911  
BOOK 4053

Chains

$\frac{1}{4}$   
S34 | S35

1934

raise a mound of  
stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

Desc. 35 ft. over NE. slope.

50.00 Foot of hill, bears NW. and SE.; over gently rolling land.

61.00 Wash, 10 lks. wide, course W.

76.50 Wash, 10 lks. wide, course W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 26, 27, 34 and 35, with brass cap mkd.

T7S | R6W  
S27 | S26  
S34 | S35

1934

raise a mound of  
stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

Land: rolling.

Soil: sandy and gravelly loam, 1st and 2nd rates.

Timber: ironwood, mesquite and palo verde.

Undergrowth: greasewood, ocotillo and cactus.

-----  
East, on random line, bet. secs. 26 and 35.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.96 Intersect the cor. of secs. 25, 26, 35 and 36.

Thence

West, on true line, bet. secs. 26 and 35.

Over gently rolling land; through scattering timber and dense undergrowth.

1.80 Wash, 30 lks. wide, course S.

19.80 Wash, 10 lks. wide, course SW.

27.00 Wash, 25 lks. wide, course S.

39.70 Wash, 20 lks. wide, course S.10°W.

39.98 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S26  
 $\frac{1}{4}$ S35

1934

raise a mound of  
stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

47.75 Wash, 40 lks. wide, course S.30°W.

69.50 Wash, 10 lks. wide, course SW.

110

## SUBDIVISION OF T.7 S., R.6 W.

Chains

79.96

The cor. of secs. 26, 27, 34 and 35.

Land: gently rolling.

Soil: sandy and gravelly loam, 1st rate.

Timber: ironwood, mesquite and palo verde.

Undergrowth: sage brush, ocotillo, willow, catclaw and greasewood.

-----  
N.0°01'W., bet. secs. 26 and 27.

Over gently rolling land; through scattering timber and dense undergrowth.

1.60 Wash, 10 lks. wide, course SW.

7.50 Wash, 10 lks. wide, course SW.

18.00 Begin ascent of 78 ft. over broken SW. slope.

27.85 Spur, slopes SW.; desc. 10 ft. over NW. slope.

39.30 (70 lks. S.0°01'E. of true point) Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for witness  $\frac{1}{4}$  sec. cor., with brass cap mkd.

W C

 $\frac{1}{4}$ 

S27 | S26

1934

raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor.40.00 True point for  $\frac{1}{4}$  sec. cor. falls in wash, 10 lks. wide, course SW., an insecure position for corner monument.

Asc. 10 ft. over SW. slope.

42.00 Wash, 20 lks. wide, course SW.; asc. 115 ft. over S. slope.

47.25 Spur, slopes SW.; asc. 325 ft. over W. and SW. slopes.

70.60 Spur, slopes W.; desc. 190 ft. over NW. slope, to cor.

72.80 Head of ravine, course NW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the ground to bedrock, with a lava stone, 10 x 7 x 7 ins., mkd. X, deposited at base, and in a mound of stone to top, for cor. of secs. 22, 23, 26 and 27, with brass cap mkd.

T7S R6W

S22 | S23

S27 | S26

1934

Land: rolling and mountainous.

Soil: sandy and gravelly loam, rocky, 2nd and 3rd rates.

Timber: ironwood, mesquite and palo verde; undergrowth: greasewood, sage, catclaw, ocotillo and cactus.

-----  
East, on random line, bet. secs. 23 and 26.

## SUBDIVISION OF T.7 S., R.6 W.

BOOK 4053

Chains	
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.04	A point 12 lks. N. of the cor. of secs. 23, 24, 25 and 26. Thence N.89°55'W., on true line, bet. secs. 23 and 26. Asc. 70 ft. over NE. slope; through scattering timber and dense undergrowth.
16.60	Low rocky spur, slopes NE.; desc. 15 ft.
23.10	Wash, 10 lks. wide, course N.; asc. 285 ft. over NE. slope.
40.02	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{r} \frac{1}{4}S23 \\ \hline \frac{1}{4}S26 \\ 1934 \end{array}$
	raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
	Asc. 290 ft. over NE. slope.
48.00	Spur, slopes NW.; desc. 525 ft. over NW. slope.
71.50	Wash, 20 lks. wide, course NW.; asc. 190 ft. over NE. slope.
80.04	The cor. of secs. 22, 23, 26 and 27. Land: mountainous. Soil: rocky and gravelly loam, 3rd rate. Timber: ironwood and palo verde; undergrowth: ocotillo, greasewood, sage brush and cactus.
	-----
	N.0°01'W., bet. secs. 22 and 23. Desc. 260 ft. over NE. slope; through scattering timber and dense undergrowth.
12.80	Wash, 30 lks. wide, course NW.; over broken W. slope.
18.90	Gulch, course SW.; asc. 497 ft. over SW. slope.
37.25	Spur, slopes NW.; desc. 97 ft. over NE. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock, with a lava stone, 6 x 6 x 4 ins., mkd. X, deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{c} \frac{1}{4} \\   \\ S22 \quad   \quad S23 \\   \\ 1934 \end{array}$
	Desc. 420 ft. over NE. slope.
65.00	Foot of slope, bears E. and W.; over gently rolling land.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 14, 15, 22 and 23, with brass cap

## SUBDIVISION OF T.7 S., R.6 W.

Chains

mkd.

T7S R6W	
S15	S14
S22	S23
1934	

raise a mound of  
stone, 2 ft. base, 1½ ft. high, W. of cor.

Land: mountainous.

Soil: sandy and gravelly loam, rocky, 2nd and 3rd rates.

Timber: ironwood and palo verde.

Undergrowth: greasewood and cactus.

-----

S.89°55'E., on random line, bet. secs. 14 and 23.

40.00 Set temp. ¼ sec. cor.

80.08 A point 14 lks. S. of the cor. of secs. 13,14,23 and 24.

Thence

S.89°59'W., on true line, bet. secs. 14 and 23.

Over rolling land; through scattering timber and dense undergrowth.

0.30 Wash, 20 lks. wide, course NE.; asc. 74 ft. over NE.slope.

13.60 Point of spur, slopes NE.; desc. 70 ft. over NW. slope.

21.60 Wash, 60 lks. wide, course NW.; asc. 167 ft. over NE.slope.

37.00 Rocky spur, slopes NW.; desc. 85 ft. over SW. slope.

40.04 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bedrock, and in a mound of stone to top, for ¼ sec. cor., with brass cap mkd.

S14
S23
1934

raise a mound of  
stone, 2 ft. base, 1½ ft. high, N. of cor.

Desc. 63 ft. over SW. slope.

49.00 Wash, 10 lks. wide, course NW.; asc. 120 ft. over NE.slope

60.80 Spur, slopes NW.; desc. 122 ft. over SW. slope.

65.00 Foot of slope, bears E. and W.; over gently rolling land.

80.08 The cor. of secs. 14,15,22 and 23.

Land: rolling.

Soil: sandy and gravelly loam, rocky, 2nd and 3rd rates.

Timber: ironwood, mesquite and palo verde.

Undergrowth: greasewood and cactus.

-----

N.0°01'W., bet. secs. 14 and 15.

Over gently rolling land; through scattering timber and dense undergrowth.

## SUBDIVISION OF T.7 S., R.6 W.

13  
BOOK 4053

Chains	
4.00	Wash, 10 lks. wide, course NW.
13.80	Wash, 10 lks. wide, course NW.
22.00	Wash, 50 lks. wide, course NW.
27.10	Wash, 40 lks. wide, course NW.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{c} \frac{1}{4} \\ \uparrow \\ S15 \mid S14 \\ 1934 \end{array}$
	raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
72.50	Wash, 10 lks. wide, course NW.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 10, 11, 14 and 15, with brass cap mkd.
	$\begin{array}{c} T7S \ R6W \\ S10 \mid S11 \\ \hline S15 \mid S14 \\ 1934 \end{array}$
	raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
	Land: gently rolling. Soil: sandy and gravelly loam, stony, 1st and 2nd rates. Timber: ironwood, mesquite and palo verde. Undergrowth: greasewood, catclaw and cactus.
	-----
	N. 89° 59' E., on random line, bet. secs. 11 and 14.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.04	Intersect the cor. of secs. 11, 12, 13 and 14.
	Thence
	S. 89° 59' W., on true line, bet. secs. 11 and 14.
	Asc. 68 ft. over E. slope; through scattering timber and undergrowth.
8.00	Hill, bears N. and S.; desc. 74 ft. over W. slope.
11.00	Base of hill, bears E. and W.; over gently rolling land; enter dense undergrowth.
40.02	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{c} S11 \\ \frac{1}{4} \\ \hline S14 \\ 1934 \end{array}$
	raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
80.04	The cor. of secs. 10, 11, 14 and 15.



## SUBDIVISION OF T.7 S., R.6 W.

## Chains

Land: rolling.  
Soil: sandy and gravelly loam, rocky, 2nd and 3rd rates.  
Timber: ironwood, mesquite and palo verde.  
Undergrowth: greasewood and cactus.

N.0°01'W., bet. secs. 10 and 11.

Over gently rolling land; through scattering timber and dense undergrowth.

2.20 Old road, bears N.30°E. and S.30°W.

7.70 Wash, 20 lks. wide, course NW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ | \\ S10 | S11 \\ | \\ 1934 \end{array}$$

dig pits, 18 x 18 x 12 ins., N. and S. of post, 3 ft. dist.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 2, 3, 10 and 11, with brass cap mkd.

$$\begin{array}{c} T7S | R6W \\ \hline S3 | S2 \\ \hline S10 | S11 \\ | \\ 1934 \end{array}$$

dig pits, 18 x 18 x 12 ins., one in each sec., 3 ft. dist.

Land: rolling.  
Soil: sandy and gravelly loam, 1st and 2nd rates.  
Timber: ironwood, mesquite and palo verde.  
Undergrowth: greasewood and cactus.

N.89°59'E., on random line, bet. secs. 2 and 11.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.00 A point 5 lks. N. of the cor. of secs. 1, 2, 11 and 12.

Thence

N.89°59'W., on true line, bet. secs. 2 and 11.

Over gently rolling land; through scattering timber and dense undergrowth.

11.00 Road, bears N.20°W. and S.20°E.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$$\begin{array}{c} S 2 \\ \hline \frac{1}{4} \\ | \\ S11 \\ | \\ 1934 \end{array}$$

dig pits, 18 x 18 x 12 ins., E. and W. of post, 3 ft. dist.

Chains

67.60 Old road, bears N. and S.

80.00 The cor. of secs. 2,3,10 and 11.

Land: gently rolling.  
 Soil: sandy and gravelly loam, 1st and 2nd rates.  
 Timber: mesquite and palo verde.  
 Undergrowth: greasewood and cactus.

-----  
 North, on random line, bet. secs. 2 and 3.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

76.38 Intersect the N. bdy. of the Tp., 4 lks. W. of the cor. of secs. 2 and 3, only, established under this Group, described in notes of resurvey of S. bdy. of T.6 S., R.6 W.

Thence

S.0°02'W., on true line, bet. secs. 2 and 3.

Over gently rolling land; through scattering timber and dense undergrowth.

36.38 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$   
 S3 | S2  
 1934

dig pits, 18 x  
 18 x 12 ins., N. and S. of post, 3 ft. dist.

76.38 The cor. of secs. 2,3,10 and 11.

Land: gently rolling.  
 Soil: sandy and gravelly loam, 1st and 2nd rates.  
 Timber: mesquite and palo verde.  
 Undergrowth: greasewood and cactus.

-----  
 From the cor. of secs. 3,4,33 and 34, on the S. bdy. of the Tp., established under this Group, described in notes of that line,

N.0°02'W., bet. secs. 33 and 34.

Over gently rolling land; through scattering timber and dense undergrowth.

30.90 Wash, 10 lks. wide, course NW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$   
 S33 | S34  
 1934

raise a mound of

72.00 Wash, 15 lks. wide, course W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 27,28,33 and 34, with brass cap mkd.

## SUBDIVISION OF T.7 S., R.6 W.

Chains

T7S	R6W
S28	S27
S33	S34

1934

raise a mound of  
stone, 2 ft. base, 1½ ft. high, W. of cor.

Land: gently rolling.

Soil: sandy and gravelly loam, 1st rate.

Timber: ironwood, mesquite and palo verde.

Undergrowth: greasewood, ocotillo and cactus.

East, on random line, bet. secs. 27 and 34.

40.00 Set temp. ¼ sec. cor.

80.00 A point 12 lks. S. of the cor. of secs. 26, 27, 34 and 35.

Thence

S.89°55'W., on true line, bet. secs. 27 and 34.

Over gently rolling land; through scattering timber and dense undergrowth.

6.20 Wash, 20 lks. wide, course SW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for ¼ sec. cor., with brass cap mkd.

S27	
¼ S34	

1934

raise a mound of  
stone, 2 ft. base, 1½ ft. high, N. of cor.

80.00 The cor. of secs. 27, 28, 33 and 34.

Land: gently rolling.

Soil: sandy and gravelly loam, 1st rate.

Timber: mesquite and palo verde.

Undergrowth: greasewood, ocotillo and cactus.

N.0°02'W., bet. secs. 27 and 28.

Over gently rolling land; through scattering timber and dense undergrowth.

38.50 Wash, 15 lks. wide, course NW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for ¼ sec. cor., with brass cap mkd.

¼	
S28	S27

1934

raise a mound of  
stone, 2 ft. base, 1½ ft. high, W. of cor.

44.30 Wash, 20 lks. wide, course W.

## SUBDIVISION OF T.7 S., R.6 W.

17  
BOOK 4053

Chains  
65.50 Wash, 15 lks. wide, course W.  
78.00 Wash, 10 lks. wide, course NW.  
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 21, 22, 27 and 28, with brass cap mkd.

T7S R6W	
S21	S22
S28	S27
1934	

raise a mound of  
stone, 2 ft. base, 1½ ft. high, W. of cor.

Land: gently rolling.  
Soil: sandy and gravelly loam, rocky, 1st and 2nd rates.  
Timber: ironwood, mesquite and palo verde.  
Undergrowth: greasewood, catclaw, ocotillo and cactus.

N.89°55'E., on random line, bet. secs. 22 and 27.

40.00 Set temp. ¼ sec. cor.

80.04 Intersect the cor. of secs. 22, 23, 26 and 27.

Thence

S.89°55'W., on true line, bet. secs. 22 and 27.

Desc. 340 ft. over broken W. slope; through scattering timber and undergrowth.

40.02 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for ¼ sec. cor., with brass cap mkd.

S22
¼ S27
1934

raise a mound of  
stone, 2 ft. base, 1½ ft. high, N. of cor.

Desc. 50 ft. over W. slope.

42.70 Foot of slope, bears N. and S.; over gently rolling land; enter dense undergrowth.

47.40 Wash, 10 lks. wide, course SW.

57.00 Wash, 15 lks. wide, course SW.

75.00 Wash, 10 lks. wide, course SW.

80.04 The cor. of secs. 21, 22, 27 and 28.

Land: rolling.  
Soil: sandy and gravelly loam, rocky, 1st and 3rd rates.  
Timber: ironwood, mesquite and palo verde.  
Undergrowth: greasewood, catclaw and cactus.

N.0°02'W., bet. secs. 21 and 22.

SUBDIVISION OF T.7 S., R.6 W.

Chains


Over gently rolling land; through scattering timber and dense undergrowth.

13.80 Wash, 20 lks. wide, course W.

22.30 Wash, 30 lks. wide, course W.


34.00 Wash, 40 lks. wide, course W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 15, 16, 21 and 22, with brass cap mkd.



raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land: gently rolling.  
Soil: sandy and gravelly loam, stony, 1st and 2nd rates.  
Timber: ironwood, mesquite and palo verde.  
Undergrowth: greasewood, catclaw and cactus.

N. 89° 55' E., on random line, bet. secs. 15 and 22.

40.00 Set temp. 1/4 sec. cor.

80.02 A point 9 lks. N. of the cor. of secs. 14, 15, 22 and 23.

Thence

S. 89° 59' W., on true line, bet. secs. 15 and 22.


Over gently rolling land; through scattering timber and dense undergrowth.

22.00 Wash, 50 lks. wide, course NW.

29.00 Wash, 30 lks. wide, course W., from NE.

36.00 Leave same, course SW., from E.

40.01 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

76.30 Wash, 15 lks. wide, course NW.

SUBDIVISION OF T.7 S., R.6 W.

BOOK 4053

Chains  
80.02

The cor. of secs. 15,16,21 and 22.

Land: gently rolling.  
Soil: sandy and gravelly loam, stony, 1st and 2nd rates.  
Timber: ironwood, mesquite and palo verde.  
Undergrowth: greasewood, catclaw and cactus.

N.0°02'W., bet. secs. 15 and 16.

Over gently rolling land; through scattering timber and dense undergrowth.

2.50 Wash, 20 lks. wide, course NW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.




raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

50.00 Begin ascent of 74 ft. over S. slope.

70.00 Change to broken W. slope; desc. 50 ft., to cor.

74.50 Head of draw, course W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 9,10,15 and 16, with brass cap mkd.



raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land: rolling.  
Soil: sandy and gravelly loam, rocky, 1st and 2nd rates.  
Timber: ironwood, mesquite and palo verde.  
Undergrowth: greasewood, catclaw and cactus.

N.89°50'E., on random line, bet. secs. 10 and 15.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.06 A point 2 lks. S. of the cor. of secs. 10,11,14 and 15.

Thence

S.89°58'W., on true line, bet. secs. 10 and 15.

Over gently rolling land; through scattering timber and dense undergrowth.

5.00 Old road, bears NE. and SW.

40.03 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

## SUBDIVISION OF T.7 S., R.6 W.

## Chains

$$\frac{1}{4}S10$$

$$\frac{1}{4}S15$$

1934

raise a mound of  
stone, 2 ft. base, 1½ ft. high, N. of cor.

50.70 Wash, 100 lks. wide, course NW.

54.70 Begin ascent of 65 ft. over broken E. slope.

72.80 Top of ascent, bears NW. and SE.; desc. 32 ft. over broken W. slope.

80.06 The cor. of secs. 9,10,15 and 16.

Land: rolling.

Soil: sandy and gravelly loam, 1st and 2nd rates.

Timber: ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw and cactus.

N.0°02'W., bet. secs. 9 and 10.

Desc. 34 ft. along broken W. slope; through scattering timber and undergrowth.

5.00 Foot of descent, bears E. and W.; over gently rolling land; enter dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for ¼ sec. cor., with brass cap mkd.

$$\frac{1}{4}$$

$$S9 | S10$$

$$1934$$

raise a mound of  
stone, 2 ft. base, 1½ ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 3,4,9 and 10, with brass cap mkd.

$$T7S | R6W$$

$$S4 | S3$$

$$S9 | S10$$

$$1934$$

dig pits, 18 x  
18 x 12 ins., one in each sec., 3 ft. dist.

Land: rolling.

Soil: sandy and gravelly loam, 1st rate and 2nd rate.

Timber: ironwood, mesquite and palo verde.

Undergrowth: greasewood and cactus.

N.89°58'E., on random line, bet. secs. 3 and 10.

40.00 Set temp. ¼ sec. cor.

79.96 A point 2 lks. N. of the cor. of secs. 2,3,10 and 11.

Thence

S.89°59'W., on true line, bet. secs. 3 and 10.

## SUBDIVISION OF T.7 S., R.6 W.

BOOK 4053

## Chains

Over gently rolling land; through scattering timber and dense undergrowth.

- 39.98 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$ S3  
S10

1934

18 x 12 ins., E. and W. of post, 3 ft. dist. dig pits, 18 x

- 79.96 The cor. of secs. 3,4,9 and 10.

Land: gently rolling.  
Soil: sandy and gravelly loam, 1st rate.  
Timber: mesquite and palo verde.  
Undergrowth: greasewood and cactus.

-----  
N.0°02'E., on random line, bet. secs. 3 and 4.

- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.

- 76.66 Intersect the N. bdy. of the Tp., 2 lks. E. of the cor. of secs. 3 and 4, only, established under this Group, described in notes of resurvey of S. bdy. of T.6 S.,R.6 W.

Thence

S.0°01'W., on true line, bet. secs. 3 and 4

Over gently rolling land; through scattering timber and dense undergrowth.

- 36.66 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$   
S4 | S3

1934

stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor. raise a mound of

- 76.66 The cor. of secs. 3,4,9 and 10.

Land: gently rolling.  
Sandy and gravelly loam, 1st and 2nd rates.  
Timber: mesquite and palo verde.  
Undergrowth: greasewood and cactus.

-----  
From the cor. of secs. 4,5,32 and 33, on the S. bdy. of the Tp., established under this Group, described in notes of that line,

N.0°02'W., bet. secs. 32 and 33.


Over gently rolling land; through scattering timber and dense undergrowth.

- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.




SUBDIVISION OF T.7 S., R.6 W.

Chains



18 x 12 ins., N. and S. of post, 3 ft. dist. dig pits, 18 x

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 28, 29, 32 and 33, with brass cap mkd.



18 x 12 ins., one in each sec., 3 ft. dist. dig pits, 18 x

Land: gently rolling.  
Soil: sandy and gravelly loam, 1st rate.  
Timber: ironwood, mesquite and palo verde.  
Undergrowth: greasewood, catclaw and cactus.

-----  
East, on random line, bet. secs. 28 and 33.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.


79.94 A point 5 lks. S. of the cor. of secs. 27, 28, 33 and 34.

Thence

S. 89° 58' W., on true line, bet. secs. 28 and 33.

Over gently rolling land; through scattering timber and dense undergrowth.

39.97 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.



1934

18 x 12 ins., E. and W. of post, 3 ft. dist. dig pits, 18 x

79.94 The cor. of secs. 28, 29, 32 and 33.

Land: gently rolling.  
Soil: sandy and gravelly loam, 1st rate.  
Timber: ironwood, mesquite and palo verde.  
Undergrowth: greasewood and cactus.

-----  
N. 0° 02' W., bet. secs. 28 and 29.

Over gently rolling land; through scattering timber and dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

SUBDIVISION OF T.7 S., R.6 W.

BOOK 4053

Chains

$\frac{1}{4}$   
 S29 | S28  
 1934

18 x 12 ins., N. and S. of post, 3 ft. dist. dig pits, 18 x

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 20, 21, 28 and 29, with brass cap mkd.

T7S R6W  
 S20 | S21  
 S29 | S28  
 1934

18 x 12 ins., one in each sec., 3 ft. dist. dig pits, 18 x

Land: gently rolling.  
 Soil: sandy and gravelly loam, 1st rate.  
 Timber: ironwood, mesquite and palo verde.  
 Undergrowth: greasewood, catclaw and cactus.

---

N.89°58'E., on random line, bet. secs. 21 and 28.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.94 A point 5 lks. N. of the cor. of secs. 21, 22, 27 and 28.

Thence  
 West, on true line, bet. secs. 21 and 28.

Over gently rolling land; through scattering timber and dense undergrowth.

3.55 Wash, 10 lks. wide, course NW.

39.97 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S21  
 $\frac{1}{4}$ S28  
 1934

18 x 12 ins.; E. and W. of post, 3 ft. dist. dig pits, 18 x

79.94 The cor. of secs. 20, 21, 28 and 29.

Land: gently rolling.  
 Soil: sandy and gravelly loam, 1st rate.  
 Timber: ironwood, mesquite and palo verde.  
 Undergrowth: greasewood, ocotillo and cactus.

---

N.0°02'W., bet. secs. 20 and 21.

Over gently rolling land; through scattering timber and dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

## SUBDIVISION OF T.7 S., R.6 W.

Chains

$$\begin{array}{c} \frac{1}{4} \\ \hline \text{S20} | \text{S21} \\ \hline 1934 \end{array}$$

dig pits, 18 x  
18 x 12 ins., N. and S. of post, 3 ft. dist.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 16, 17, 20 and 21, with brass cap mkd.

$$\begin{array}{c} \text{T7S, R6W} \\ \hline \text{S17} | \text{S16} \\ \hline \text{S20} | \text{S21} \\ \hline 1934 \end{array}$$

dig pits, 18 x  
18 x 12 ins., one in each sec., 3 ft. dist.

Land: gently rolling.  
Soil: sandy and gravelly loam, 1st rate.  
Timber: ironwood, mesquite and palo verde.  
Undergrowth: greasewood, catclaw and cactus.

East, on random line, bet. secs. 16 and 21.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.90 A point 2 lks. N. of the cor. of secs. 15, 16, 21 and 22.

Thence

N. 89° 59' W., on true line, bet. secs. 16 and 21.

Over gently rolling land; through scattering timber and dense undergrowth.

39.95 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$$\begin{array}{c} \text{S16} \\ \hline \frac{1}{4} \text{S21} \\ \hline 1934 \end{array}$$

dig pits, 18 x  
18 x 12 ins., E. and W. of post, 3 ft. dist.

79.90 The cor. of secs. 16, 17, 20 and 21.

Land: gently rolling.  
Soil: sandy and gravelly loam, 1st rate.  
Timber: ironwood, mesquite and palo verde.  
Undergrowth: greasewood, catclaw, ocotillo and cactus.

N. 0° 02' W., bet. secs. 16 and 17.

Over gently rolling land; through scattering timber and dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ \hline \text{S17} | \text{S16} \\ \hline 1934 \end{array}$$

## SUBDIVISION OF T.7 S., R.6 W.

BOOK 4053

## Chains

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 8,9,16 and 17, with brass cap mkd.

T7S	R6W
S 8	S 9
S17	S16

1934

18 x 12 ins., N. and S. of post, 3 ft. dist. dig pits, 18 x 18 x 12 ins., one in each sec., 3 ft. dist.

Land: gently rolling.

Soil: sandy and gravelly loam, 1st rate.

Timber: ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw, ocotillo and cactus.

S.89°59'E., on random line, bet. secs. 9 and 16.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.92 A point 2 lks. N. of the cor. of secs. 9,10,15 and 16.

Thence

N.89°58'W., on true line, bet. secs. 9 and 16.

Desc. 33 ft. over broken W. slope; through scattering timber and undergrowth.

7.80 Wash, 10 lks. wide, course NW.; over gentle NW. slope.

15.00 Foot of slope, bears N. and S.; over gently rolling land.

39.96 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S9
$\frac{1}{4}$ S16

1934

18 x 12 ins., E. and W. of post, 3 ft. dist. dig pits, 18 x 18 x 12 ins., one in each sec., 3 ft. dist.

79.92 The cor. of secs. 8,9,16 and 17.

Land: gently rolling.

Soil: sandy and gravelly, 1st rate.

Timber: ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw and cactus.

N.0°02'W., bet. secs. 8 and 9.

Over gently rolling land; through scattering timber and dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$
S8   S9

1934

## SUBDIVISION OF T.7 S., R.6 W.

Chains

18 x 12 ins., N. and S. of post, 3 ft. dist. dig pits, 18 x  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the  
 ground, for cor. of secs. 4, 5, 8 and 9, with brass cap mkd.

T7S R6W  
 S5 | S4  
 S8 | S9  
 1934

18 x 12 ins., one in each sec., 3 ft. dist. dig pits, 18 x

Land: gently rolling.  
 Soil: sandy and gravelly loam, 1st rate.  
 Timber: mesquite and palo verde.  
 Undergrowth: greasewood and cactus.

S.89°58'E., on random line, bet. secs. 4 and 9.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.94 A point 5 lks. N. of the cor. of secs. 3, 4, 9 and 10.

Thence

N.89°56'W., on true line, bet. secs. 4 and 9.

Over gently rolling land; through scattering timber and  
 dense undergrowth.

39.97 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S4  
 S9

1934

18 x 12 ins., E. and W. of post, 3 ft. dist. dig pits, 18 x

79.94 The cor. of secs. 4, 5, 8 and 9.

Land: gently rolling.  
 Soil: sandy and gravelly loa, 1st rate.  
 Timber: ironwood, mesquite and cactus.  
 Undergrowth: greasewood, catclaw and cactus.

N.0°01'E., on random line, bet. secs. 4 and 5.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

76.40 Intersect the N. bdy. of the Tp., 2 lks. E. of the cor. of  
 secs. 4 and 5, only, established under this Group, de-  
 scribed in notes of resurvey of S. bdy. of T.6 S., R.6 W.

Thence

South, on true line, bet. secs. 4 and 5.

Over gently rolling land; through scattering timber and  
 dense undergrowth.

## SUBDIVISION OF T.7 S., R.6 W.

BOOK 4053

Chains

36.40

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ | \\ S5 | S4 \\ | \\ 1934 \end{array}$$

18 x 12 ins., N. and S. of post, 3 ft. dist. dig pits, 18 x

76.40 The cor. of secs. 4, 5, 8 and 9.

Land: gently rolling.  
Soil: sandy and gravelly loam, 1st rate.  
Timber: mesquite and palo verde.  
Undergrowth: greasewood and cactus.

From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., established under this Group, described in notes of that line,

N.0°03'W., bet. secs. 31 and 32.

Over gently rolling land; through scattering timber and dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.
$$\begin{array}{c} \frac{1}{4} \\ | \\ S31 | S32 \\ | \\ 1934 \end{array}$$

18 x 12 ins., N. and S. of post, 3 ft. dist. dig pits, 18 x

60.00 Begin ascent of gradual SE. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 29, 30, 31 and 32, with brass cap mkd.

$$\begin{array}{c} T7S R6W \\ S30 | S29 \\ S31 | S32 \\ 1934 \end{array}$$

stone, 2 ft. base, 1 ft. high, W. of cor. raise a mound of

Land: gently rolling.  
Soil: sandy and gravelly loam, 1st and 3rd rates.  
Timber: ironwood, mesquite and palo verde.  
Undergrowth: greasewood, catclaw and cactus.

East, on random line, bet. secs. 29 and 32.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.08 A point 12 lks. S. of the cor. of secs. 28, 29, 32 and 33.

Thence

S.89°55'W., on true line, bet. secs. 29 and 32.

## SUBDIVISION OF T.7 S., R.6 W.

## Chains

Over gently rolling land; through scattering timber and dense undergrowth.

40.04 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$ S29  
 $\frac{1}{4}$ S32

1934

raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

70.00 Begin ascent of gradual E. slope.

80.08 The cor. of secs. 29,30,31 and 32.

Land: gently rolling.

Soil: sandy and gravelly loam, rocky, 1st and 3rd rates.

Timber: ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw and cactus.

West, on random line, bet. secs. 30 and 31.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

71.40 Intersect the W. bdy. of the Tp., 4 lks. S. of the cor. of secs. 30 and 31, only, established under this Group, described in notes of resurvey of E. bdy. of T.7 S., R.7 W.

Thence

S.89°58'E., on true line, bet. secs. 30 and 31.

Over gently rolling land; through scattering timber and dense undergrowth.

31.40 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bedrock, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$ S30  
 $\frac{1}{4}$ S31

1934

raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

Asc. 25 ft. over gradual SW. slope.

61.40 Change to SE. slope; desc. 23 ft.

71.40 The cor. of secs. 29,30,31 and 32.

Land: rolling.

Soil: sandy and gravelly loam, rocky, 1st and 3rd rates.

Timber: ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw and cactus.

N.0°03'W., bet. secs. 29 and 30.

Desc. 23 ft. over rocky NE. slope; through scattering timber and undergrowth.


SUBDIVISION OF T.7 S., R.6 W.

BOOK 4058

Chains


12.00 Foot of descent, bears SE. and W.; over gently rolling land; enter dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 19, 20, 29 and 30, with brass cap mkd.



raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land: rolling.  
Soil: sandy and gravelly loam, stony, 1st and 2nd rates.  
Timber: ironwood, mesquite and palo verde.  
Undergrowth: greasewood, catclaw and cactus.

N.89°55'E., on random line, bet. secs. 20 and 29.

40.00 Set temp. 1/4 sec. cor.


80:08 Intersect the cor. of secs. 20, 21, 28 and 29.

Thence

S.89°55'W., on true line, bet. secs. 20 and 29.

Over gently rolling land; through scattering timber and dense undergrowth.

40.04 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



dig pits, 18 x 18 x 12 ins., E. and W. of post, 3 ft. dist.

80.08 The cor. of secs. 19, 20, 29 and 30.

Land: gently rolling.  
Soil: sandy and gravelly loam, 1st rate.  
Timber: ironwood, mesquite and palo verde.  
Undergrowth: greasewood, catclaw and cactus.

N.89°58'W., on random line, bet. secs. 19 and 30.

40.00 Set temp. 1/4 sec. cor.



## SUBDIVISION OF T.7 S., R.6 W.

Chains  
70.99 Intersect the W. bdy. of the Tp., 6 lks. S. of the cor. of secs. 19 and 30, only, established under this Group, described in notes of resurvey of E. bdy. of T.7 S., R.7 W.

Thence

S.89°55'E., on true line, bet. secs. 19 and 30.

Over gently rolling land; through scattering timber and dense undergrowth.

30.99 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S19  
—  
S30  
1934

dig pits, 18 x  
18 x 12 ins., E. and W. of post, 3 ft. dist.

70.99 The cor. of secs. 19, 20, 29 and 30.

Land: gently rolling.

Soil: sandy and gravelly loam, 1st rate.

Timber: ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw and cactus.

N.0°03'W., bet. secs. 19 and 20.

Over gently rolling land; through scattering timber and dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$   
S19 | S20  
—  
1934

dig pits, 18 x  
18 x 12 ins., N. and S. of post, 3 ft. dist.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 17, 18, 19 and 20, with brass cap mkd.

T7S R6W  
S18 | S17  
—  
S19 | S20  
1934

dig pits, 18 x  
18 x 12 ins., one in each sec., 3 ft. dist.

Land: gently rolling.

Soil: sandy and gravelly loam, 1st rate.

Timber: ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw and cactus.

N.89°55'E., on random line, bet. secs. 17 and 20.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.08 A point 16 lks. S. of the cor. of secs. 16, 17, 20 and 21.

## SUBDIVISION OF T.7 S., R.6 W.

31  
ECCX 4053

Chains

Thence

S.89°48'W., on true line, bet. secs. 17 and 20.

Over gently rolling land; through scattering timber and dense undergrowth.

40.04 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd. $\frac{1}{4}$ S17  
 $\frac{1}{4}$ S20

1934

18 x 12 ins., E. and W. of post, 3 ft. dist. dig pits, 18 x

80.08 The cor. of secs. 17,18,19 and 20.

Land: gently rolling.

Soil: sandy and gravelly loam, 1st rate.

Timber: ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw and cactus.

-----  
N.89°55'W., on random line, bet. secs. 18 and 19.40.00 Set temp.  $\frac{1}{4}$  sec. cor.

71.22 Intersect the cor. of secs. 18 and 19, only, on the W. bdy. of the Tp., established under this Group, described in notes of resurvey of E. bdy. of T. 7S., R. 7W.

Thence

S.89°55'E., on true line, bet. secs. 18 and 19

Over gently rolling land; through scattering timber and dense undergrowth.

31.22 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd. $\frac{1}{4}$ S18  
 $\frac{1}{4}$ S19

1934

18 x 12 ins., E. and W. of post, 3 ft. dist. dig pits, 18 x

71.22 The cor. of secs. 17,18,19 and 20.

Land: gently rolling.

Soil: sandy and gravelly loam, 1st rate.

Timber: ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw and cactus.

-----  
N.0°03'W., bet. secs. 17 and 18.

Over gently rolling land; through scattering timber and dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

## SUBDIVISION OF T.7 S., R.6 W.

Chains

$$\begin{array}{c} \frac{1}{4} \\ \uparrow \\ \text{S18} \mid \text{S17} \\ \downarrow \\ 1934 \end{array}$$

dig pits, 18 x 18 x 12 ins., N. and S. of post, 3 ft. dist.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 7, 8, 17 and 18, with brass cap mkd.

$$\begin{array}{c} \text{T7S R6W} \\ \hline \text{S7} \mid \text{S8} \\ \hline \text{S18} \mid \text{S17} \\ \downarrow \\ 1934 \end{array}$$

dig pits, 18 x 18 x 12 ins., one in each sec., 3 ft. dist.

Land: gently rolling.

Soil: sandy and gravelly loam, 1st rate.

Timber: ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw and cactus.

N. 89°48'E., on random line, bet. secs. 8 and 17.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.06 Intersect the cor. of secs. 8, 9, 16 and 17.

Thence

S. 89°48'W., on true line, bet. secs. 8 and 17.

Over gently rolling land; through scattering timber and dense undergrowth.

40.03 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$$\begin{array}{c} \text{S8} \\ \hline \frac{1}{4} \text{S17} \\ \downarrow \\ 1934 \end{array}$$

dig pits, 18 x 18 x 12 ins., E. and W. of post, 3 ft. dist.

80.06 The cor. of secs. 7, 8, 17 and 18.

Land: gently rolling.

Soil: sandy and gravelly loam, 1st rate.

Timber: ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw and cactus.

N. 89°55'W., on random line, bet. secs. 7 and 18.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

71.11 Intersect the W. bdy. of the Tp., 4 lks. S. of the cor. of secs. 7 and 18, only, established under this Group, described in notes of resurvey of E. bdy. of T.7 S., R.7 W.

Thence

SUBDIVISION OF T.7 S., R.6 W.

BOOK 4053

Chains

S.89°53'E., on true line, bet. secs. 7 and 18.

Over gently rolling land; through scattering timber and dense undergrowth.

31.11 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S7  
S18

1934

18 x 12 ins., E. and W. of post, 3 ft. dist. dig pits, 18 x

71.11 The cor. of secs. 7, 8, 17 and 18.

Land: gently rolling.  
Soil: sandy and gravelly loam, 1st rate.  
Timber: ironwood, mesquite and palo verde.  
Undergrowth: greasewood, catclaw and cactus.

N.0°03'W., bet. secs. 7 and 8.

Over gently rolling land; through scattering timber and dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$   
S7 | S8  
1934

18 x 12 ins., N. and S. of post, 3 ft. dist. dig pits, 18 x

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 5, 6, 7 and 8, with brass cap mkd.

T7S R6W  
S6 | S5  
S7 | S8  
1934

18 x 12 ins., one in each sec., 3 ft. dist. dig pits, 18 x

Land: gently rolling.  
Soil: sandy and gravelly loam, 1st rate.  
Timber: mesquite and palo verde.  
Undergrowth: greasewood and cactus.

N.89°48'E., on random line, bet. secs. 5 and 8.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.04 A point 2 lks. N. of the cor. of secs. 4, 5, 8 and 9.

Thence

S.89°49'W., on true line, bet. secs. 5 and 8.

## SUBDIVISION OF T.7 S., R.6 W.

## Chains

Over gently rolling land; through scattering timber and dense undergrowth.

- 40.02 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$$\frac{1}{4} \frac{S5}{S8}$$

1934

18 x 12 ins., E. and W. of post, 3 ft. dist. dig pits, 18 x

- 80.04 The cor. of secs. 5, 6, 7 and 8.

Land: gently rolling.  
Soil: sandy and gravelly loam, 1st rate.  
Timber: mesquite and palo verde.  
Undergrowth: greasewood and cactus.

N. 89° 53' W., on random line, bet. secs. 6 and 7.

- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.

- 70.83 Intersect the W. bdy. of the Tp., 6 lks. S. of the cor. of secs. 6 and 7, only, established under this Group, described in notes of resurvey of E. bdy. of T.7 S., R.7 W.

Thence

S. 89° 50' E., on true line, bet. secs. 6 and 7.

Over gently rolling land; through scattering timber and dense undergrowth.

- 30.83 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$$\frac{1}{4} \frac{S6}{S7}$$

1934

18 x 12 ins., E. and W. of post, 3 ft. dist. dig pits, 18 x

- 70.83 The cor. of secs. 5, 6, 7 and 8.

Land: gently rolling.  
Soil: sandy and gravelly loam, 1st rate.  
Timber: mesquite and palo verde.  
Undergrowth: greasewood and cactus.

North, on random line, bet. secs. 5 and 6.

- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.

- 76.36 Intersect the N. bdy. of the Tp., 2 lks. E. of the cor. of secs. 5 and 6, only, established under this Group, described in notes of resurvey of S. bdy. of T.6 S., R.6 W.

Thence

S. 0° 01' E., on true line, bet. secs. 5 and 6.

## SUBDIVISION OF T.7 S., R.6 W.

BOOK 35  
4053

## Chain

Over gently rolling land; through scattering timber and dense undergrowth.

- 36.36 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ \uparrow \\ S6 | S5 \\ \downarrow \\ 1934 \end{array}$$

dig pits, 18 x 18 x 12 ins., N. and S; of post, 3 ft. dist.

- 76.36 The cor. of secs. 5, 6, 7 and 8.

Land: gently rolling.  
Soil: sandy and gravelly loam, 1st rate.  
Timber: ironwood, mesquite and palo verde.  
Undergrowth: greasewood and cactus.

## GENERAL DESCRIPTION

T.7 S., R.6 W., lies about 12 miles SW. of the town of Gila Bend, Ariz. The N. part of the Tp. is reached by secondary or wood roads.

Most of the township is flat, at an elevation of 800 to 1000 ft. above sea-level. There is a large hill in the SE. part which rises about 700 ft. above the valley land.

Soil in the hill portions is volcanic in character, usually shallow and rocky; elsewhere it is an excellent sandy or gravelly loam. Drainage is mostly to the north-west, though most of the washes are soon lost in the porous soil soon after leaving the hills.

The usual desert growth is present, with considerable of the varieties large enough for fuel along the washes. Greasewood is the most common undergrowth. There is a great variety of cacti, notably the ocotillo.

There is no evidence of mineral. No water has been developed. There are no residents or no improvements. Grazing is poor.

ECON 4053

4-679 b

~~XXXXXXXXXX~~ **DIAGRAM.**

Township 7 South, Range 6 West

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

6-4817

- Surveyed by Robt. H. Williams, Temporary Transitman
- - - - - Surveyed by R.E. McMahan, Temporary Transitman
- Surveyed by Frank C. Mulford, Temporary Transitman
- - - - - Surveyed by Ben D. Procter, Temporary Transitman
- Surveyed by Gilden Redewill, Temporary Transitman

89  
364

BOOK 4053

4-680  
(August, 1926)

**FIELD ASSISTANTS.**  
to  
Ben D. Procter, Temporary Transitman

NAMES.	CAPACITY.
Haskell Welch	1st Chainman
D.B. Carver	2nd Chainman
Thomas L. Bond	Flagman
William Norris	Axman
J.P. Edgar	Axman
Samuel Bunger	Cornerman
Harry Yeager	Cornerman



CERTIFICATE OF UNITED STATES SURVEYOR

I, Ben D. Procter *Temporary Transitman*, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Arizona bearing date of the 12th day of December, 1933, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of \_\_\_\_\_ the SUBDIVISION LINES of \_\_\_\_\_ Township 7 South, Range 6 West \_\_\_\_\_ of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

*Ben D. Procter*  
*Temporary Transitman*

APPROVAL

~~OFFICE OF U. S. SUPERVISOR OF SURVEYS,~~

\_\_\_\_\_, 19\_\_\_\_

~~The foregoing field notes of the survey of~~ \_\_\_\_\_

~~executed by~~ \_\_\_\_\_

~~under his special instructions dated \_\_\_\_\_, 19\_\_\_\_, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.~~

*U. S. Supervisor of Surveys.*

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~ \_\_\_\_\_

~~, has been correctly copied from the original notes on file in this office.~~

*U. S. Supervisor of Surveys.*

4-680  
(August, 1926)

BOOK 4053

**FIELD ASSISTANTS.**  
to

Robt. H. Williams, Temporary Transitman

NAMES.	CAPACITY.
G.C.Capes	1st Chainman
Odis Kent	2nd Chainman
Harmon Yoakum	Flagman
A.L.Hart	Cornerman
LeRoy De Brown	Cornerman
R.P.Childers	Axman
Albert Scott	Axman

39

92

BOOK 4053

# CERTIFICATE OF UNITED STATES SURVEYOR

I, Robt. H. Williams *Temporary Transitman*, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Arizona bearing date of the 12th day of December, 1933, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of \_\_\_\_\_ the SUBDIVISION LINES of \_\_\_\_\_ Township 7 South, Range 6 West of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

*Robt. H. Williams*  
*Temporary Transitman.*

## APPROVAL

~~OFFICE OF U. S. SUPERVISOR OF SURVEYS,~~

\_\_\_\_\_, 10

The foregoing field notes of the survey of \_\_\_\_\_

executed by \_\_\_\_\_ under his special instructions dated \_\_\_\_\_, 10, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

*U. S. Supervisor of Surveys.*

I certify that the foregoing transcript of the field notes of the above described surveys in \_\_\_\_\_, has been correctly copied from the original notes on file in this office.

*U. S. Supervisor of Surveys.*

4-680  
(August, 1926)

BOOK 4053

**FIELD ASSISTANTS.**

to

R. E. McMahan, Temporary Transitman

NAMES.	CAPACITY.
W. E. Thompson	1st Chainman
George H. Lindberg	2nd Chainman
R. D. Riggins	2nd Chainman
J. E. Carlin	Flagman
S. A. Berry	Cornerman
O. A. Brown	Cornerman
Sam Bunger	Cornerman
J.C. Chamberlain	Axman
Gordon Wainwright	Axman

41 94

BOOK 4053

CERTIFICATE OF UNITED STATES SURVEYOR

I, R. E. McMahan Temporary Transitman, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Arizona bearing date of the 12th day of December, 1933, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the SUBDIVISION LINES of Township 7 South, Range 6 West of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

R. E. McMahan
Temporary Transitman

APPROVAL

Office of U. S. Supervisor of Surveys,

10

The foregoing field notes of the survey of

executed by

under his special instructions dated 10, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above described surveys in has been correctly copied from the original notes on file in this office.

U. S. Supervisor of Surveys.

4-680  
(August, 1926)

BOOK 4053

FIELD ASSISTANTS.  
to \_\_\_\_\_

Frank C. Mulford, Temporary Transitman

NAMES.	CAPACITY.
J.H.McVey	1st Chainman
Roy A. Drake	2nd Chainman
G.B.Ruiz	Flagman
J.C.Bigger	Flagman
George W. Bellas	Cornerman
A.C.Bucher	Cornerman
E.M.Heathington	Axman
Ed. Storey	Axman

43 96  
BOOK 4053

CERTIFICATE OF UNITED STATES SURVEYOR

I, Frank C. Mulford *Temporary Transitman*, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Arizona bearing date of the 12th day of December, 1933, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of \_\_\_\_\_ the SUBDIVISION LINES of \_\_\_\_\_ Township 7 South, Range 6 West \_\_\_\_\_ of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

*Frank C. Mulford*  
*Temporary Transitman*

APPROVAL

~~OFFICE OF U. S. SUPERVISOR OF SURVEYS,~~

10

The foregoing field notes of the survey of \_\_\_\_\_

executed by \_\_\_\_\_

under his special instructions dated \_\_\_\_\_, 10\_\_\_\_\_, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

*U. S. Supervisor of Surveys.*

I certify that the foregoing transcript of the field notes of the above described surveys in \_\_\_\_\_, has been correctly copied from the original notes on file in this office.

*U. S. Supervisor of Surveys.*

BOOK 4053

4-680  
(August, 1926)

### FIELD ASSISTANTS.

to  
Gilden Redewill, Temporary Transitman

NAMES.	CAPACITY.
I. L. Dial	1st Chainman
Larry Hickey	2nd Chainman
W. C. Barney	Flagman
J. A. Burt	Axman
Paul Greenhaw	Axman
J. G. Hickey	Cornerman
W. T. Moore	Cornerman



45 98  
BOOK 4053  
CERTIFICATE OF UNITED STATES SURVEYOR

I, Gilden Redewill Temporary Transitman, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Arizona bearing date of the 12th day of December, 1933, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of \_\_\_\_\_ the SUBDIVISION LINES of \_\_\_\_\_ Township 7 South, Range 6 West of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Gilden Redewill  
Temporary Transitman.

APPROVAL

OFFICE OF U. S. SUPERVISOR OF SURVEYS,  
Denver, Colorado, May 16, 1935

The foregoing field notes of the survey of \_\_\_\_\_ the SUBDIVISION LINES of \_\_\_\_\_ Township 7 South, Range 6 West of the Gila and Salt River Base and Meridian, in the State of Arizona executed by Ben D. Procter, Robt. H. Williams, R. E. McWhan Frank C. Mulford and Gilden Redewill, Temporary Transitmen under special instructions dated December 12, 1933. Group 199, Arizona having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Wm. H. Johnson  
U. S. Supervisor of Surveys.

~~I certify that the foregoing transcript of the field notes of the above described surveys in \_\_\_\_\_, has been correctly copied from the original notes on file in this office.~~

~~U. S. Supervisor of Surveys.~~