

Book "H"

4-679

BOOK 4057

FIELD NOTES

OF THE SURVEY OF THE

SUBDIVISION LINES of

Township 9 South, Range 5 West

Of the Gila and Salt River *Base & Meridian,*

In the State of Arizona

EXECUTED BY

Walter H. Good, U.S. Surveyor and R.E. McMahan, Gilden Redewill,

Frank C. Mulford, Dexter S. King, Ben D. Procter and Robt. H.

Williams, Temporary Transitmen

In the capacity of U. S. Surveyors, under Special Instructions dated Dec. 12, 1933, issued by the District Cadastral Engineer to govern surveys included in Group No. 199 Arizona, which were approved by the Commissioner of the General Land Office, February 17, 1934, and Assignment Instructions dated Dec. 15, 1933 and Feb. 2, 1934.

Survey commenced February 13, 1934.

Survey completed February 19, 1934.


4057

4057

INDEX DIAGRAM.

Township 9 South, Range 5 West

Surveved under this Group, notes in other Book

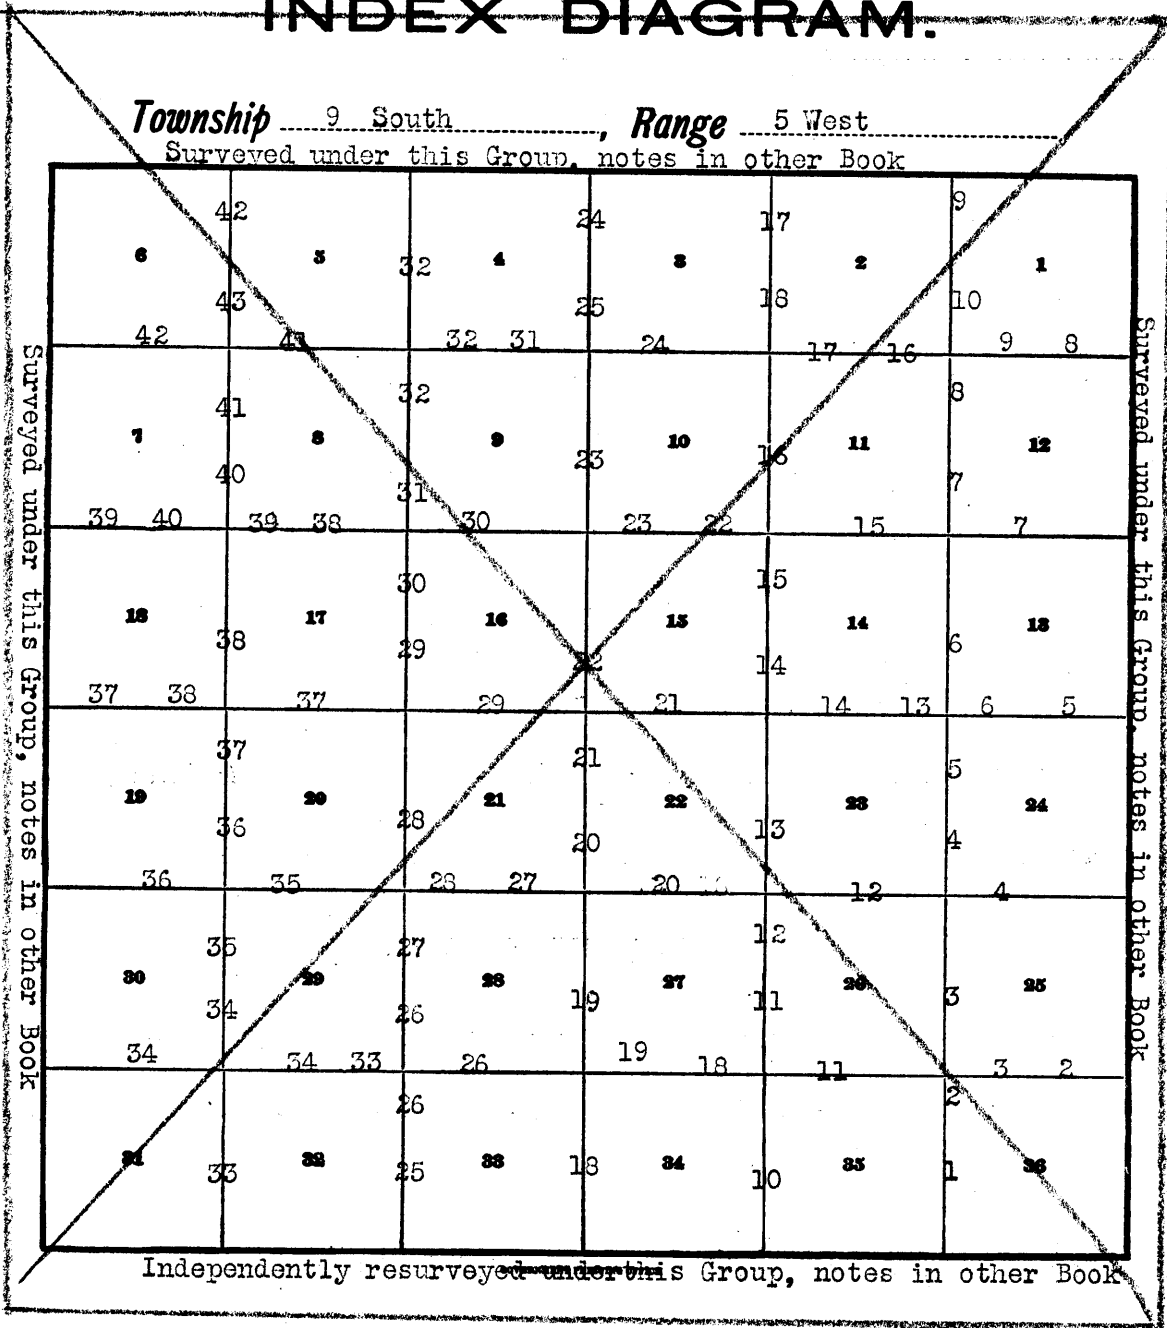

INDEX DIAGRAM.

BOOK 4057

	42			24				9	
6		5	32	4	3	17	2		1
	43							10	
42		41		32 31	24		17 16		9 8
	41							8	
7		8	31	9	23	10	16	11	12
	40								
39 40		39	30	30	23	22		15	7
18	38	17	29	16 22	15 14			14 6	13
				T.95.	R.5W.				
37	38	37		29	21			14 13	6 5
					21			5	
19	36	20	28	21	22	13	23		24
					20			4	
36		35		28 27	20		12		4
	35		27			12			
30		29		28 19	27		26	3	25
	34		26			11			
34		34 33		26	19 18		11		3 2
			26					2	
31	33	32		33 18	34	10	35		36
			25					1	

2nd Standard Parallel South

————— Surveyed under this group.

----- Resurveyed under this group.

————— Surveyed under Group No. 198.

----- Resurveyed under Group No. 198.

SUBDIVISIONS OF T.9 S., R.5 W.

BOOK 4057

Chains

The subdivisional survey of T.9 S., R.5 W., was executed with Young & Sons transits Nos. 8477, 8588, 8493 and 8584, Buff & Buff transit No. 10127, Keuffel & Esser transit No. 9699 and W. and L.E. Gurley transit No. 20117. All of the instruments are constructed in accordance with the standard specifications of the General Land Office, with full vertical circles with verniers reading to single minutes, which is also the least count of the two verniers of the horizontal circles of each instrument. The instruments were in good condition, and having been placed in satisfactory adjustment prior to beginning the survey, and tested and found free from appreciable error, were approved by the district cadastral engineer on Dec. 15, 1933 and Jan. 10, 1934.

The types of land, timber and undergrowth in T.9 S., R.5 W., offer few objections to projection of lines by back and foresight method, and that method of projecting lines is selected in view of the inexperience of the instrumentmen with the solar attachments with which the transits are equipped.

Lines are initiated from the standard parallel on the S. bdy. of the Tp., which is independently resurveyed at this time as described in the record of this group. All lines are checked by repetition of angles, double back and foresights and occasional direct altitude observations on the sun for azimuth and, where feasible, by check of azimuths initiated at different points on the standard parallel against each other.

The measurements are made with Lallie and Lufkin steel tapes, 5 chs. in length, graduated every link for the first 100 lks. and the balance at intervals of 10 lks. The tapes were tested by comparison with a Lufkin standard and found correct. The measurements are made on the slope and the vertical angle of each interval is determined with a clinometer in good adjustment; the horizontal equivalents are entered in the field note record.

From the standard cor. of secs. 35 and 36, on the S. bdy. of the Tp., as relocated by independent resurvey under this Group, described in notes of that line.

N.0°Q1'W., bet. secs. 35 and 36.

Over rolling land; through scattering timber and dense undergrowth.

- 3.50 Wash, 10 lks. wide, course N.20°W.
 18.00 Wash, 20 lks. wide, course NW.
 19.60 W. edge of hill, about 40 ft. high, bears E., about 15 chs. dist.
 30.90 Wash, 40 lks. wide, course W.
 39.85 (15 lks. S.0°Q1'E. of true point) Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for witness cor. to $\frac{1}{2}$ sec. cor., with brass cap mkd.

$\frac{1}{2}$
 W | C
 335 | 336
 1934

and raise a mound of

SUBDIVISIONS OF T.9 S., R.5 W.

Chains

- stone, 2 ft. base, 1½ ft. high, W. of witness cor.
- 40.00 True point for ¼ sec. cor. falls in wash, 10 lks. wide, course SW.
- 46.20 Wash, 30 lks. wide, course N.70°W.; asc. 24 ft. over S. slope.
- 47.10 Hill, slopes W.; desc. 21 ft. over NW. slope.
- 49.70 Wash, 20 lks. wide, course SW.; over flat.
- 52.10 Base of hill, bears E. and W.; asc. 131 ft. over S. slope.
- 60.30 Peak of hill, desc 96 ft. over N. slope.
- 65.30 Head of gulch, course W.; asc. 188 ft. over SW. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., on cross (X) on exposed bedrock, and in a mound of stone to top, for cor. of secs. 25, 26, 35 and 36, with brass cap mkd.

T9S R5W	
S26	S25
S35	S36
1934	

Cor. stands on spur, slopes SE., from N.

Land: gently rolling and rolling.
 Soil, sand and gravelly loam, 2nd and 4th rates.
 Timber: a few ironwood, mesquite and palo verde.
 Undergrowth: greasewood, ocotillo, catclaw and cactus.

East, on random line, bet. secs. 25 and 36.

- 40.00 Set temp. ¼ sec. cor.
- 80.00 Intersect the E. bdy. of the Tp. at a point 5 lks. S. of the cor. of secs. 25, 30, 31 and 36, an iron post, 2 ins. diam., firmly set in a mound of stone, mkd. and witnessed as described in the official record of Group No. 198.
- Thence
- S.89°58'W., on true line, bet. secs. 25 and 36.
- Asc. 8 ft. over NE. slope; through scattering timber and undergrowth.
- 1.00 Spur, slopes SE.; desc. 156 ft. over W. slope.
- 13.45 Wash, 20 lks. wide, course SW.; desc. slightly.
- 18.25 Wash, 15 lks. wide, course S.; asc. 42 ft. over NE. slope.
- 21.60 Spur, slopes S.; over rolling S. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for ¼ sec. cor., with brass cap mkd.

½	S25
¼	S36
1934	

and raise a mound of

SUBDIVISIONS OF T.9 S., R.5 W.

3
BOOK 4057

Chains

stone, 2 ft. base, 1½ ft. high, N. of cor.

- 42.30 Wash, 20 lks. wide, course SW.; asc. 163 ft. over NE.slope.
 54.15 Spur, slopes SE.; desc. 130 ft. over SW. slope.
 59.80 Wash, 30 lks. wide, course SE.; asc. 30 ft. over SE. slope.
 65.00 Point of spur, slopes SE.; desc. 51 ft. over SW. slope.
 68.40 Wash, 15 lks. wide, course SE.; asc. 115 ft. over SE.slope.
 80.00 The cor. of secs. 25,26,35 and 36.

Land: rolling and mountainous.
 Soil: sand and gravelly loam, 2nd and 4th rates.
 Timber: a few ironwood, mesquite and paloverde.
 Undergrowth: greasewood, catclaw, ocotillo and cacti.

N.0°01'W., bet. secs. 25 and 26.

Asc. 82 ft. along S. slope of spur; through scattering timber and undergrowth.

- 8.20 Spur, slopes S., from NW.; desc. 177 ft. over NE. slope.
 19.00 Wash, 30 lks. wide, course SE.; asc. 74 ft. over SW.slope.
 26.10 Point of spur, slopes W.; desc. 29 ft. over NW. slope.
 31.10 Wash, 15 lks. wide, course SW.; asc. 37 ft. over SW. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for ¼ sec. cor., with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ \uparrow \\ \text{S26} \mid \text{S25} \\ \downarrow \\ 1934 \end{array}$$

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Asc. 231 ft. over SW. slope.

- 54.65 Ridge, bears SW. and NE.; desc. 405 ft. over NW. slope.
 70.50 Wash, 20 lks. wide, course NW.; asc. 104 ft. over rocky SW. slope.
 75.70 Spur, slopes W.; desc. 56 ft. over NW. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 23,24,25 and 26, with brass cap mkd.

$$\begin{array}{c} \text{T9S R5W} \\ \text{S23} \mid \text{S24} \\ \text{S26} \mid \text{S25} \\ \downarrow \\ 1934 \end{array}$$

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land: mountainous.
 Soil: sandy and gravelly loam, rocky, 3rd and 4th rates.
 Timber: scattering ironwood, mesquite and palo verde.
 Undergrowth: greasewood, catclaw, ocotillo and cactus.

Chains	
	N.89°58'E., on random line, bet. secs. 24 and 25.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.90	Intersect E. bdy. of the Tp. at a point 5 lks. N. of the cor. of secs. 19, 24, 25 and 30, an iron post, 2 ins. diam., projecting 8 ins. above ground, firmly set and mkd. on brass cap and witnessed as described in the official record of Group No. 198.
	Thence
	West, on true line, bet. secs. 24 and 25.
	Asc. 225 ft. over NE. slope; through scattering timber and dense undergrowth.
10.00	Spur, slopes SE.; desc. 321 ft. over SW. slope.
30.70	Wash, 40 lks. wide, course SE.; asc. 113 ft. over NE. slope.
39.95	Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{r} S24 \\ \frac{1}{4}S25 \\ \hline 1934 \end{array}$
	and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
	Asc. 16 ft. along N. slope.
41.00	Point of spur, slopes NE.; desc. 39 ft. along N. slope.
44.60	Wash, 10 lks. wide, course NE.; asc. 185 ft. over E. slope.
50.90	Ridge, bears N. and S.; desc. 206 ft. over W. slope.
58.45	Wash, 40 lks. wide, course S.; asc. 115 ft. over E. slope.
65.70	E. rim of ridge, bears N. and S.; over rolling top of ridge.
69.70	W. rim of ridge; desc. 320 ft. over NW. slope.
79.90	The cor. of secs. 23, 24, 25 and 26.
	Land: mountainous. Soil: sandy and gravelly loam, 2nd and 4th rates. Timber: scattering ironwood, mesquite and palo verde. Undergrowth: greasewood, ocotillo, catclaw and cactus.

	N.0°01'W., bet. secs. 23 and 24.
	Desc. 10 ft. over NW. slope; through scattering timber and undergrowth.
2.00	Gulch, course W.; asc. 96 ft. over S. slope.
7.80	Point of spur, slopes SW.; over NW. slope.
10.00	Gulch, course S.30°W.; asc. 133 ft. over rocky SW. slope.
19.10	Head of gulch, course SW.; asc. 54 ft. along broken W. slope.

SUBDIVISIONS OF T.9 S., R.5 W.

BOOK 4057

Chains

- 21.00 Rocky spur, slopes SW.; desc. 76 ft. over NW. slope.
- 28.00 Head of gulch, course SW.; asc. 228 ft. over SW. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\begin{array}{c} \uparrow \\ 323 \mid 324 \\ 1934 \end{array}$$

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Asc. 267 ft. over SW. slope.

- 52.50 Ridge, bears NW. and SE.; desc. 467 ft. over NE. slope.
- 72.45 Gulch, near head, course NE.; continue descent 129 ft. over NE. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 13, 14, 23 and 24, with brass cap mkd.

$$\begin{array}{c} T9S \mid R5W \\ 314 \mid 313 \\ 323 \mid 324 \\ 1934 \end{array}$$

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Land: mountainous.

Soil: sandy and gravelly loam, 2nd and 4th rates.

Timber: scattering ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw, ocotillo and cactus.

East, on random line, bet. secs. 13 and 24.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 79.96 Intersect E. bdy. of Tp., 2 lks. S. of the cor. of secs. 13, 18, 19 and 24, an iron post, 2 ins. diam., firmly set in a mound of stone, and mkd. on brass cap and witnessed as described in the official record of Group No. 198.

Thence

S.89°59'W., on true line, bet. secs. 13 and 24.

Asc. 16 ft. over NE. slope; through scattering timber and dense undergrowth.

- 3.70 E. rim of ridge, bears N. and SW.; desc. 103 ft. over gentle W. slope.
- 27.30 W. rim of ridge, bears N. and SW.; desc. 333 ft. over SW. slope.
- 39.98 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\begin{array}{c} 313 \\ \hline 324 \\ 1934 \end{array}$$

SUBDIVISIONS OF T.9 S., R.5 W.

Chains

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

Desc. 24 ft. over SW. slope.

41.40 Wash, 50 lks. wide, course N.30°W.; asc. 270 ft. over NE. slope.

58.50 Spur, slopes NW.; desc. 292 ft. over SW. slope.

70.40 Wash, 50 lks. wide, course NW.; over N. slope.

73.60 Wash, 40 lks. wide, course NE.; asc. 80 ft. over NE. slope.

79.96 The cor. of secs. 13,14,23 and 24.

Land: mountainous and rolling.
Soil: sandy and gravelly loam, 2nd and 4th rates.
Timber: scattering ironwood, mesquite and palo verde.
Undergrowth: greasewood, catclaw, ocotillo and cactus.

N.0°01'W., bet. secs. 13 and 14.

Desc. 63 ft. over NE. slope; through scattering timber and undergrowth.

12.20 Wash, 50 lks. wide, course NW.; over gently rolling land.

32.45 Wash, 40 lks. wide, course N.30°W.

36.65 Wash, 25 lks. wide, course S.60°W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.

1/4
 S14 | S13
 1934

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

45.00 Foot of slope, bears E. and W.; asc. 170 ft. over SW. slope.

56.20 Spur, slopes SE.; asc. 235 ft. along E. slope of spur.

73.40 Rocky spur, slopes SW.; asc. 75 ft. along W. slope of spur.

79.20 (80 lks. S.0°01'E. of true point) Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to bedrock, for witness cor. to cor. of secs. 11,12,13 and 14, with brass cap mkd.

W C
 T9S | R5W
 S11 | S12
 S14 | S13
 1934

with a lava stone, 6 x 4 x 3 ins., mkd. X, deposited at base.

Witness cor. stands on spur, slopes SW.

80.00 True point for cor. of secs. 11,12,13 and 14 falls on edge of ledge of rocks, an impracticable point for iron post corner monument.

SUBDIVISIONS OF T.9 S., R.5 W.

BOOK 4057

Chains

Land: mountainous and rolling.
Soil: sandy and gravelly loam, 2nd and 4th rates.
Timber: scattering ironwood, mesquite and palo verde.
Undergrowth: greasewood, catclaw, ocotillo and cactus.

N.89°59'E., on random line, bet. secs. 12 and 13.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.12 Intersect the E. bdy. of the Tp., 7 lks. N. of the cor. of secs. 7, 12, 13 and 18, an iron post, 2 ins. diam., firmly set flush with top of a small mound of stone, and mkd. on brass cap and witnessed as described in the official record of Group No. 198.

Thence

N.89°58'W., on true line, bet. secs. 12 and 13.

Desc. 304 ft. along steep N. slope; through scattering timber and undergrowth.

16.70 Saddle of divide, bears NW. and SE.; desc. 78 ft. over SW. slope.

26.90 Wash, 20 lks. wide, course S.; asc. 168 ft. over E. slope.

38.45 Spur, slopes S.; desc. 35 ft. over W. slope.

40.06 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{2}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ S12
 $\frac{1}{4}$ S13
1934

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Desc. 406 ft. over W. slope.

61.30 Wash, 50 lks. wide, course S.; asc. 385 ft. over E. slope.

79.00 Ridge, bears N. and S.; desc. 29 ft. over NW. slope.

80.12 The true point for cor. of secs. 11, 12, 13 and 14.

Land: mountainous.
Soil: sandy and gravelly loam, rocky, 4th rate.
Timber: scattering ironwood, mesquite and palo verde.
Undergrowth: greasewood, catclaw, ocotillo and cactus.

N.0°01'W., bet. secs. 11 and 12.

Asc. 59 ft. over broken SW. slope; through scattering timber and undergrowth.

5.70 Spur, slopes W.; desc. 87 ft. over NW. slope.


9.00 Gulch, course N.60°W.; asc. 56 ft. over SW. slope.

21.40 Rocky spur, slopes N.60°W.; desc. 125 ft. over broken NW. slope.

SUBDIVISIONS OF T.9 S., R.5 W.

Chains

- 28.30 Gulch, course W.; asc. 153 ft. over SW. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{2}$ sec. cor., with brass cap mkd.



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Asc. 94 ft. over SW. slope.

- 45.80 Divide, bears N.60°W. and S.60°E.; desc. 105 ft. over NE. slope.

62.10 Gulch, course NE.; asc. 28 ft. over SE. slope.

65.20 Spur, slopes NE.; desc. 207 ft. over NW. slope.

73.50 Gulch, course NE.; along E. slope.

- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 1, 2, 11 and 12, with brass cap mkd.



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land: mountainous.

Soil: sandy and gravelly loam, rocky, 4th rate.

Timber: scattering ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw, ocatillo and cactus.

S.89°58'E., on random line, bet. secs. 1 and 12.

- 40.00 Set temp. $\frac{1}{2}$ sec. cor.

- 80.20 Intersect E. bdy. of Tp. at a point 5 lks. S. of the cor. of secs. 1, 6, 7 and 12, which is an iron post, 2 ins. diam., firmly set flush with top of a mound of stone, and mkd. on brass cap and witnessed as described in the official record of Group No. 198.

Thence

West, on true line, bet. secs. 1 and 12.

Desc. 142 ft. over SW. slope; through scattering timber and undergrowth.

8.75 Gulch, course NW.; asc. 153 ft. over NE. slope.

16.20 Spur, slopes NW.; desc. 142 ft. over SW. slope.

37.60 Gulch, course NW.; asc. 63 ft. along N. slope.

- 40.10 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bedrock, with a lava stone, 6 x 5 x 4 ins.,

SUBDIVISIONS OF T.9 S., R.5 W.

ECCO 400

Chains

mkd. X, deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ S1
 $\frac{1}{4}$ S12
 1934

Over rolling N. slope.

43.50 Gulch, course NE.; asc. 227 ft. over NE. slope.

52.00 Spur, slopes NE.; desc. 180 ft. over NW. slope.

65.00 Gulch, course NE.; asc. 150 ft. over NE. slope.

70.00 Spur, slopes NE.; desc. 50 ft. over NW. slope.

79.00 Gulch, course NE.; asc. 25 ft. over E. slope.

80.20 The cor. of secs. 1, 2, 11 and 12.

Land: mountainous.

Soil: sandy and gravelly loam, rocky, 4th. rate.

Timber: scattering ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw, ocotillo and cactus.

N.0°01'W., on random line, bet. secs. 1 and 2.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.10 Intersect the N. bdy. of the Tp. at a point 14 lks. W. of the true point for cor. of secs. 1, 2, 35 and 36, witnessed as described in the official record of this Group.

Thence, from true point,

S.0°05'W., on true line, bet. secs. 1 and 2:

Asc. 24 ft. along rolling E. slope; through scattering timber and undergrowth.

13.60 Wash, 30 lks. wide, course NE.; asc. 158 ft. over NW. slope.

29.30 Spur; slopes W.; desc. 24 ft. over SW. slope.

32.80 Gulch, course W.; asc. 94 ft. over NW. slope.

39.70 (40 lks. N.0°05'E. of true point) Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock, and in a mound of stone to top, for witness cor. to $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
 S2 | S1
 W | C
 1934

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Over W. slope.

40.10 True point for $\frac{1}{4}$ sec. cor. falls on exposed bedrock, slopes W., an impracticable place for monument.

46.10 Ridge, bears NE. and SW.; asc. 265 ft. along E. slope of ridge.

SUBDIVISIONS OF T.9 S., R.5 W.

Chains	
53.20	Ridge, bears NW. and SE.; asc. 82 ft. along W. slope.
66.10	Ridge, bears NE. and SW.; desc. 234 ft. over SE. slope.
80.10	The cor. of secs. 1,2,11 and 12.
	Land: mountainous. Soil: sandy and gravelly loam, rocky, 4th rate. Timber: scattering ironwood, mesquite and palo verde. Undergrowth: greasewood, catclaw, ocotillo and cactus.

	From the standard cor. of secs. 34 and 35, on the S. bdy. of the Tp., which is an iron post, 2 ins. diam., firmly set, and mkd. on brass cap and witnessed as described in the official record of this Group,
	N.0°01'W., bet. secs. 34 and 35.
	Over gently rolling land; through scattering timber and dense undergrowth.
9.50	Wash, 20 lks. wide, course NW.
19.50	Old road, bears NW. and SE.
26.40	Wash, 50 lks. wide, course W.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{c} \uparrow \\ S34 \mid S35 \\ 1934 \end{array}$
	and raise a mound of
	stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
43.70	Wash, 40 lks. wide, course W.
62.75	Wash, 75 lks. wide, course W.
76.50	Wash, 60 lks. wide, course NW.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 26,27,34 and 35, with brass cap mkd.
	$\begin{array}{c} T9S R5W \\ S27 \mid S26 \\ S34 \mid S35 \\ 1934 \end{array}$
	and raise a mound of
	stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
	Land: rolling. Soil: sandy and gravelly loam, stony, 2nd and 3rd rates. Timber: scattering ironwood, mesquite and palo verde. Undergrowth: greasewood, catclaw, ocotillo and cactus.

	East, on random line, bet. secs. 26 and 35.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.02	A point 14 lks. N. of the cor. of secs. 25,26,35 and 36.

SUBDIVISIONS OF T.9 S., R.5 W.

Chains	
	Thence
	N.89°54'W., on true line, bet. secs. 26 and 35.
	Desc. 198 ft. over SW. slope; through scattering timber and undergrowth.
10.80	Wash, 100 lks. wide, course SW.; asc. 167 ft. over SE. slope.
23.80	Spur, slopes SE.; desc. 151 ft. over SW. slope.
28.70	Gulch, course SW.; asc. 51 ft. over E. slope.
36.00	Spur, slopes S.; desc. 92 ft. over W. slope.
40.01	Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{2}$ sec. cor., with brass cap mkd.
	$\begin{array}{r} \frac{1}{2} S26 \\ \frac{4}{4} S35 \\ \hline 1934 \end{array}$
	and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
	Desc. 57 ft. over W. slope.
55.40	Foot of slope, bears N. and S.; over gently rolling land.
61.80	Wash, 30 lks. wide, course S.
80.02	The cor. of secs. 26, 27, 34 and 35.
	Land: rolling and hilly. Soil: sandy and gravelly loam, rocky; 2nd and 4th rates. Timber: scattering ironwood, mesquite and palo verde. Undergrowth: greasewood, catclaw, ocotillo and cactus.

	N.0°01'W., bet. secs. 26 and 27.
	Over rolling land; through scattering timber and undergrowth.
5.00	Foot of hill, bears E. and W.; asc. 44 ft. over S. slope.
11.95	Top of hill, bears E. and W.; desc. 52 ft. over N. slope.
21.00	Wash, 10 lks. wide, course W.; over gently rolling land.
30.25	Wash, 50 lks. wide, course W.
38.90	Wash, 30 lks. wide, course SW.
40.00	True point for $\frac{1}{2}$ sec. cor. falls in wash, 10 lks. wide, course SW.
41.00	(1.00 ch. N.0°01'W. of true point) Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock, with a lava stone, 6 x 5 x 4 ins. mkd. X, deposited at base, and in a mound of stone to top, for witness cor. to $\frac{1}{2}$ sec. cor., with brass cap mkd.
	$\begin{array}{r} \frac{1}{2} \\ S27 S26 \\ W C \\ \hline 1934 \end{array}$

SUBDIVISIONS OF T.9 S., R.5 W.

Chains

- 51.00 Foot of slope, bears NW. and SE.; asc. 266 ft. over SW. slope.
- 62.80 Spur, slopes W.; desc. 86 ft. over NW. slope.
- 68.00 Gulch, course W.; asc. 194 ft. over SW. slope.
- 74.60 Spur, slopes N., from SE.; desc. 114 ft. over same.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bedrock, with a lava stone, 10 x 8 x 8 ins., mkd. X, deposited at base, and in a mound of stone to top, for cor. of secs. 22, 23, 26 and 27, with brass cap mkd.

T9S	R5W
S22	S23
S27	S26
1934	

Land: rolling and hilly.

Soil: sandy and gravelly loam, rocky, 2nd and 4th rates.

Timber: scattering ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw, ocotillo and cactus.

S.89°54'E., on random line, bet. secs. 23 and 26.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.

- 80.00 A point 16 lks. S. of the cor. of secs. 23, 24, 25 and 26.

Thence

S.89°59'W., on true line, bet. secs. 23 and 26.

Desc. 54 ft. over W. slope; through scattering timber and undergrowth.

- 8.10 Wash, 50 lks. wide, course S.80°W.

- 28.10 Same wash, course NW.

- 31.60 Same wash, from NE., course W.

- 36.60 Same wash, course NW., from E.

- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ S23	
$\frac{1}{4}$ S26	
1934	

and raise a mound of
stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

- 43.00 Wash, 150 lks. wide, course N.70°W.

- 46.20 Wash, 15 lks. wide, course NW.; asc. 24 ft. over E. slope.

- 53.60 Spur, slopes NW.; desc. 10 ft.

- 57.20 Wash, 120 lks. wide, course NW.; over gently rolling land.

- 63.20 Wash, 100 lks. wide, course NW.; asc. 231 ft. over E. slope.

SUBDIVISIONS OF T.9 S., R.5 W.

FORM 4087

Chains

80.00 The cor. of secs. 22, 23, 26 and 27.

Land: rolling and gently rolling.
 Soil: sandy and gravelly loam, rocky, 2nd and 4th rates.
 Timber: scattering ironwood, mesquite and palo verde.
 Undergrowth: greasewood, catclaw, ocotillo and cactus.

N.0°01'W., bet. secs. 22 and 23.

Desc. 289 ft. over N. slope; through scattering timber and undergrowth.

18.20 Foot of slope, bears NW. and SE.; over gently rolling land.

26.00 Wash, 100 lks. wide, course NW.

37.50 Foot of slope, bears NW. and SE.; over gentle SW. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bedrock, with a lava stone, 6 x 4 x 3 ins., mkd. X, deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
$$\begin{array}{c} \frac{1}{4} \\ \uparrow \\ \text{S22} \mid \text{S23} \\ \downarrow \\ 1934 \end{array}$$

Asc. 81 ft. over broken SW. slope.

54.00 Head of gulch, course S.80°W.; asc. 273 ft. over SW. slope.

68.95 Spur, slopes NW.; desc. 281 ft. over NE. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., on cross (X) chiseled on exposed bedrock, and in a mound of stone to top, for cor. of secs. 14, 15, 22 and 23, with brass cap mkd.

$$\begin{array}{c} \text{T9S} \mid \text{R5W} \\ \text{S15} \mid \text{S14} \\ \hline \text{S22} \mid \text{S23} \\ 1934 \end{array}$$

Land: gently rolling to mountainous.
 Soil: sandy and gravelly loam, rocky, 2nd and 4th rates.
 Timber: scattering ironwood, mesquite and palo verde.
 Undergrowth: greasewood, catclaw, ocotillo and cactus.

N.89°59'E., on random line, bet. secs. 14 and 23.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.00 A point 5 lks. N. of the cor. of secs. 13, 14, 23 and 24.

Thence

N.89°59'W., on true line, bet. secs. 14 and 23.

Asc. 708 ft. over NE. slope; through scattering timber and undergrowth.

29.45 Spur, slopes N.; desc. 279 ft. over NW. slope.

SUBDIVISIONS OF T.9 S., R.5 W.

Chains	
40.00	Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{r} \frac{1}{4} S14 \\ \frac{1}{4} S23 \\ 1934 \end{array}$
	and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
	Hat Mountain, bears South, about 10 chs. dist.; top about 600 ft. higher than this cor.
	Desc. 563 ft. over NW. slope
76.50	Wash, 30 lks. wide, course N.; asc. 46 ft. over E. slope.
80.00	The cor. of secs. 14, 15, 22 and 23.
	Land: mountainous. Soil: sandy and gravelly loam, 2nd and 4th rates. Timber: scattering ironwood, mesquite and palo verde. Undergrowth: greasewood, catclaw, ocotillo and cactus.
	----- N.0°01'W., bet. secs. 14 and 15.
	Desc. 97 ft. along E. slope; through scattering timber and dense undergrowth.
15.00	Wash, 30 lks. wide, course NW.; over gently rolling land.
17.50	Wash, 60 lks. wide, course W.
26.45	Wash, 20 lks. wide, course W.
34.00	Foot of slope, bears NE. and SW.; asc. 145 ft. over broken SE. slope.
39.50	(50 lks. S.0°01'E. of true point) Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground to bedrock, and in a mound of stone to top, for witness cor. to $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{r} \frac{1}{4} \\ W C \\ S15 S14 \\ 1934 \end{array}$
	and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
40.00	True point for $\frac{1}{4}$ sec. cor. falls on sloping ledge of rock, an impracticable place for monument.
	Asc. 15 ft. over broken S. slope.
45.80	Rocky spur, slopes SW.; desc. 113 ft. over NW. slope.
50.50	Gulch, course SW.; asc. 131 ft. over broken SE. slope.
62.80	Spur, slopes SW.; desc. 29 ft. over NW. slope.
66.80	Gulch, course SW.; asc. 253 ft. over broken SW. slope.
78.80	Ridge, bears E. and W.; desc. 56 ft. over NE. slope.

SUBDIVISIONS OF T.9 S., R.5 W.

15

BOOK 4057

Chains

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to bedrock, with a lava stone, 9 x 6 x 5 ins., mkd. X, deposited at base, and in a mound of stone to top, for cor. of secs. 10, 11, 14 and 15, with brass cap mkd.

T9S	R5W
S10	S11
S15	S14
1934	

Land: rolling and mountainous.
 Soil: sandy and gravelly loam, rocky, 2nd and 4th rates.
 Timber: scattering ironwood, mesquite and palo verde.
 Undergrowth: greasewood, catclaw, ocotillo and cactus.

 S. 89° 59' E., on random line, bet. secs. 11 and 14.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.96 A point 2 lks. S. of the true point for cor., of secs. 11, 12, 13 and 14.
 Thence

West, on true line, bet. secs. 11 and 14.

Desc. 437 ft. over rocky W. slope; through scattering timber and undergrowth.

21.20 Wash, 20 lks. wide, course SW.; over gently rolling land.

26.25 Wash, 15 lks. wide, course S.; asc. 46 ft. over E. slope.

32.30 Spur, slopes S.; desc. 43 ft. over W. slope.

39.98 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ S11	
$\frac{1}{4}$ S14	
1934	

and raise a mound of stone, 2 ft. base, 1 ft. high, N. of cor.

Desc. 12 ft. over gentle W. slope.

47.85 Wash, 20 lks. wide, course SW.

59.85 Wash, 25 lks. wide, course N.

63.35 Foot of slope, bears N. and S.; asc. 234 ft. over E. slope.

70.90 Spur, slopes N.; desc. 83 ft. over W. slope.

73.00 Gulch, course N.; asc. 133 ft. over rocky E. slope.

79.96 The cor. of secs. 10, 11, 14 and 15.

Land: gently rolling and mountainous.
 Soil: sandy and gravelly loam, rocky, 2nd and 4th rates.
 Timber: scattering ironwood, mesquite and palo verde.
 Undergrowth: greasewood, ocotillo, catclaw and cactus.

SUBDIVISIONS OF T.9 S., R.5 W.

Chains	N.0°01'W., bet. secs. 10 and 11.
	Desc. 246 ft. over rocky NE. slope; through scattering timber and undergrowth.
16.20	Wash, 10 lks. wide, course SE.; asc. 156 ft. over SW. slope.
24.50	Spur, slopes SE.; desc. 140 ft. over NE. slope.
34.90	Wash, 15 lks. wide, course SE.; asc. 9 ft. over SW. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., on cross (X) chiseled on exposed bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{c} \uparrow \\ \text{S10} \text{S11} \\ \hline 1934 \end{array}$
	Asc. 175 ft. over SW. slope.
54.00	Spur, slopes SE.; desc. 101 ft. over NE. slope.
57.75	Wash, 50 lks. wide, course SE.; asc. 296 ft. over SE. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., on cross (X) chiseled on exposed bedrock, and in a mound of stone to top, for cor. of secs. 2, 3, 10 and 11, with brass cap mkd.
	$\begin{array}{c} \text{T9S} \text{R5W} \\ \hline \text{S3} \text{S2} \\ \hline \text{S10} \text{S11} \\ \hline 1934 \end{array}$
	Land: mountainous. Soil: sandy and gravelly, rocky, 4th rate. Timber: scattering ironwood, mesquite and palo verde. Undergrowth: greasewood, catclaw, ocotillo and cactus.

	East, on random line, bet. secs. 2 and 11.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.90	Intersect the cor. of secs. 1, 2, 11 and 12.
	Thence
	West, on true line, bet. secs. 2 and 11.
	Asc. 94 ft. over E. slope; through scattering timber and undergrowth.
3.80	Ridge, bears NE. and S.; desc. 321 ft. over W. slope.
15.00	Wash, 20 lks. wide, course N.; asc. 157 ft. over E. slope.
34.85	Gulch, course NE.; asc. 78 ft. along broken N. slope.
39.60	Gulch, course NE.
39.95	Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground, with a lava stone, 10 x 8 x 6 ins., mkd. X, deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

SUBDIVISIONS OF T.9 S., R.5 W.

BOOK 6057

Chains

$$\frac{1}{4} \frac{S2}{S11}$$

1934

Asc. 272 ft. over rocky, broken NE. slope.

61.00 Divide, bears NW. and SE.; desc. 46 ft. over SW. slope.

64.50 Gulch, course SE.; asc. 163 ft. over E. slope.

73.15 Spur, slopes SE.; desc. 185 ft. over W. slope.

78.15 Head of gulch, course S.; asc. 14 ft.

79.90 The cor. of secs. 2,3,10 and 11.

Land: mountainous.

Soil: sandy and gravelly loam, rocky 4th rate.

Timber: scattering ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw, ocotillo and cactus.

N.0°05'E., on random line, bet. secs. 2 and 3.40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.24 Intersect N. bdy. of the Tp. at a point 2 lks. W. of the cor. of secs. 2,3,34 and 35, an iron post, 2 ins. diam., firmly set and mkd. on brass cap and witnessed as described in the official record of this Group,

Thence

S.0°06'W., on true line, bet. secs. 2 and 3.

Asc. 90 ft. over NE. slope; through scattering timber and undergrowth.

4.00 Point, on ridge, bears NW. and SW.; desc. 69 ft. along E. slope.

17.80 Ridge, bears NW. and SE.; desc. 380 ft. over SW. slope.

35.40 Wash, 20 lks. wide, course NW.; asc. 91 ft. over NE. slope.

40.24 True point for $\frac{1}{2}$ sec. cor. falls on ledge of rock, an impracticable place for monument.40.93 (69 lks. S.0°06'W. of true point) Set an iron post, 3 ft. long, 1 in. diam., 5 ins. in the ground to bedrock, with a lava stone, 10 x 6 x 6 ins., mkd. X, deposited at base, and in a mound of stone to top, for witness cor. to $\frac{1}{2}$ sec. cor., with brass cap mkd.
$$\begin{array}{c} W \\ | \\ C \\ | \\ S3 \\ | \\ S2 \end{array}$$

1934

Asc. 39 ft. over NE. slope.

42.40 Spur, slopes NW.; desc. 58 ft. over SW. slope.

55.80 Wash, 20 lks. wide, course NW.; asc. 429 ft. over N. slope.

73.00 Divide, bears N.80°W. and S.80°E.; desc. 154 ft. over SE. slope.

SUBDIVISIONS OF T.9 S., R.5 W.

Chains

80.24 The cor. of secs. 2,3,10 and 11.

Land: mountainous.
Soil: sandy and gravelly loam, rocky, 4th rate.
Timber: scattering ironwood, mesquite and palo verde.
Undergrowth: greasewood, catclaw, ocotillo and cactus.

From the standard cor. of secs. 33 and 34, on the S. bdy. of the Tp., an iron post, 2 ins. diam., firmly set and mkd. on brass cap as described in the official record of this Group,

N.0°02'W., bet. secs. 33 and 34.

Over gently rolling land; through scattering timber and undergrowth.

34.20 Wash, 20 lks. wide, course NW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
 S33 | S34
 1934

and raise a mound of
stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

43.00 Old road, bears NW. and SE.

48.80 Wash, 50 lks. wide, course W.

56.00 Wash, 10 lks. wide, course W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 27,28,33 and 34, with brass cap mkd.

T9S R5W
S28 | S27
S33 | S34
 1934

and raise a mound of
stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land: gently rolling.
Soil: sandy and gravelly loam, 1st and 2nd rate.
Timber: scattering ironwood, mesquite and palo verde.
Undergrowth: greasewood, catclaw, ocotillo and cactus.

East, on random line, bet. secs. 27 and 34.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.04 A point 9 lks. S. of the cor. of secs. 26,27,34 and 35.

Thence

S.89°56'W., on true line, bet. secs. 27 and 34.

Over gently rolling land; through scattering timber and dense undergrowth.

26.40 Wash, 150 lks. wide, course NW.

SUBDIVISIONS OF T.9 S., R.5 W.

BOOK 4057

Chains

40.02 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S27
—
S34
1934

and raise a mound of
stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

68.00 Wash, 20 lks. wide, course NW.

80.04 The cor. of secs. 27, 28, 33 and 34.

Land: gently rolling.

Soil: sandy and gravelly loam, 1st and 2nd rates.

Timber: scattering ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw, ocotillo and cactus.

N.0°02'W., bet. secs. 27 and 28.

Over gently rolling land; through scattering timber and dense undergrowth.

9.30 Wash, 20 lks. wide, course NW.

14.90 Wash, 10 lks. wide, course W.

27.00 Wash, 40 lks. wide, course W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
S28 | S27
—
1934

and raise a mound of
stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

42.30 Wash, 40 lks. wide, course W.

69.60 Wash, 20 lks. wide, course W.

72.60 Wash, 40 lks. wide, course W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 21, 22, 27 and 28, with brass cap mkd.

T9S. R5W
S21 | S22
—
S28 | S27
—
1934

and raise a mound
of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land: gently rolling.

Soil: sandy and gravelly loam, 1st and 2nd rates.

Timber: scattering ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw, ocotillo and cactus.

SUBDIVISIONS OF T.9 S., R.5 W.

Chains
 N.89°56'E., on random line, bet. secs. 22 and 27.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.08 A point 15 lks. N. of the cor. of secs. 22, 23, 26 and 27.
 Thence
 N.89°58'W., on true line, bet. secs. 22 and 27.
 Desc. 80 ft. over W. slope; through scattering timber and undergrowth.
 2.70 Gulch, course N.; asc. 73 ft. over E. slope.
 7.40 Spur, slopes NW.; desc. 297 ft. over SW. slope.
 23.30 Wash, 20 lks. wide, course S.; asc. 99 ft. over E. slope.
 31.40 Top of hill, bears N. and S.; desc. 160 ft. over W. slope.
 38.00 Foot of hill, bears N. and S.; over gently rolling land.
 40.04 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S22
 $\frac{1}{4}$ S27
 1934

and raise a mound of
 stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

40.40 Wash, 20 lks. wide, course S.; asc. 29 ft. over E. slope.
 45.00 Top of hill, bears N. and S.; desc. 46 ft. over W. slope.
 50.00 Foot of hill, bears N. and S.; over gently rolling land.
 80.08 The cor. of secs. 21, 22, 27 and 28.

Land: rolling and gently rolling.
 Soil: sandy and gravelly loam, rocky, 2nd and 4th rates.
 Timber: scattering ironwood, mesquite and palo verde.
 Undergrowth: greasewood, catclaw, ocotillo and cactus.

N.0°02'W., bet. secs. 21 and 22.

Over gently rolling land; through scattering timber and dense undergrowth.

25.00 Base of hill, bears E. and W.; asc. 161 ft. over S. slope.
 36.80 Top of hill, bears E. and W.; desc. 112 ft. over N. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
 S21 | S22
 1934

and raise a mound of
 stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Desc. 46 ft. over N. slope.

SUBDIVISIONS OF T.9 S., R.5 W.

BOOK 4057

Chains
 45.00 Base, of hill, bears E. and W.; over gently rolling land.
 59.00 Wash, 20 lks. wide, course NW.
 65.80 Wash, 20 lks. wide, course W.
 68.00 Wash, 30 lks. wide, course W.
 69.70 Wash, 20 lks. wide, course SW.
 72.80 Wash, 40 lks. wide, course SW.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 15,16,21 and 22, with brass cap mkd.

T9S	R5W
S16	S15
S21	S22

1934

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Land: gently rolling and rolling.
 Soil: sandy and gravelly, rocky, 2nd and 4th rates.
 Timber: scattering ironwood, mesquite and palo verde.
 Undergrowth: greasewood, ocotillo, catclaw and cactus.

S.89°58'E., on random line, bet. secs. 15 and 22.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.10 A point 19 lks. S. of the cor. of secs. 14,15,22 and 23.

Thence

S.89°54'W., on true line, bet. secs. 15 and 22.

Asc. 172 ft. over E. slope; through scattering timber and undergrowth.

3.20 Spur, slopes N.; desc. 298 ft. over W. slope.

20.10 Foot of slope, bears NE. and S.; over gently rolling land.

23.40 Wash, 20 lks. wide, course SW.

33.90 Wash, 10 lks. wide, course SW.

40.05 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ S15
S22

1934

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

73.30 Wash, 60 lks. wide, course SW.

80.10 The cor. of secs. 15,16,21 and 22.

Land: gently rolling and rolling.
 Soil: sandy and gravelly loam, 2nd and 4th rates.
 Timber: scattering ironwood, mesquite and palo verde.
 Undergrowth: greasewood, ocotillo, catclaw and cactus.

SUBDIVISIONS OF T.9 S., R.5 W.

Chains

N.0°02'W., bet. secs. 15 and 16.

Over gently rolling land; through scattering timber and undergrowth.

10.20 Wash, 30 lks. wide, course W.; asc. 76 ft. over S. slope.

16.60 Top of hill, bears NE. and W.; desc. 74 ft. over N. slope.

21.20 Foot of slope, bears NE. and SW.; over gently rolling land.

27.00 Wash, 20 lks. wide, course W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.




and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Asc. 239 ft. over SE. slope.

56.50 Spur, slopes SW.; desc. 101 ft. over NW. slope.

63.00 Wash, 20 lks. wide, course SW.; asc. 170 ft. over general E. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bedrock, with a lava stone, 6 x 5 x 3 ins., mkd. X, deposited at base, and in a mound of stone to top, for cor. of secs. 9, 10, 15 and 16, with brass cap mkd.



Land: gently rolling and rolling.
Soil: sandy and gravelly loam, rocky, 2nd and 4th rates.
Timber: scattering ironwood, mesquite and palo verde.
Undergrowth: greasewood, catclaw, ocotillo and cactus.

N.89°54'E., on random line, bet. secs. 10 and 15.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.16 A point 5 lks. N. of the cor. of secs. 10, 11, 14 and 15.

Thence

S.89°56'W., on true line, bet. secs. 10 and 15.

Asc. 276 ft. over NE. slope; through scattering timber and undergrowth.

4.90 Ridge, bears NW. and SE.; desc. 382 ft. over SW. slope.

17.90 Wash, 30 lks. wide, course SW.; asc. 54 ft. along broken S. slope.

40.08 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{3}{4}$ sec. cor., with brass cap mkd.

SUBDIVISIONS OF T.9 S., R.5 W.

BOOK 4057

Chains

S10
S15
1934

and raise a mound of
stone, 2 ft. base, 1½ ft. high, N. of cor.

Asc. 41 ft. over SE. slope.

50.35 Spur, slopes SW.; desc. 161 ft. over NW. slope.

70.90 Wash, 40 lks. wide, course S.; asc. 160 ft. over E. slope.

80.16 The cor. of secs. 9,10,15 and 16.

Land: mountainous.

Soil: sandy and gravelly loam, rocky, 4th rate.

Timber: scattering ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw, ocotillo and cactus.

N.0°02'W., bet. secs. 9 and 10.Desc. 110 ft. over NE. slope; through scattering timber
and undergrowth.

8.40 Wash, 4 lks. wide, course SE.; asc. 286 ft. over SE. slope.

19.40 Spur, slopes SW.; desc. 393 ft. over N. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the
ground, for ¼ sec. cor., with brass cap mkd.

¼
S9 | S10
1934

and raise a mound
of stone, 2 ft. base, 1½ ft. high, W. of cor.

Desc. 20 ft. over N. slope.

41.15 Wash, 10 lks. wide, course NW.; asc. 19 ft.

43.40 Point of spur, slopes NW.; desc. 54 ft. over N. slope.

45.20 Wash, 12 lks. wide, course W.; asc. 382 ft. over SE. slope.

58.60 Rocky spur, slopes SW.; desc. 165 ft. over NW. slope.

68.85 Wash, 5 lks. wide, course SW.; asc. 200 ft. over SE. slope.

78.45 Spur, slopes SE.; over E. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 2 ins. in the
ground to bedrock, and in a mound of stone to top, for
cor. of secs. 3,4,9 and 10, with brass cap mkd.

T9S R5W
S4 | S3
S9 | S10
1934

and raise a mound of
stone, 2 ft. base, 1½ ft. high, W. of cor.

Land: mountainous.

Soil: sandy and gravelly loam, rocky, 4th rate.

SUBDIVISIONS OF T.9 S., R.5 W.

Chains	<p>Timber: scattering ironwood, mesquite and palo verde. Undergrowth: greasewood, catclaw, ocotillo and cactus.</p> <hr/> <p>N.89°56'E., on random line, bet. secs. 3 and 10.</p> <p>40.00 Set temp. $\frac{1}{4}$ sec. cor.</p> <p>80.14 A point 7 lks. S. of the cor. of secs. 2,3,10 and 11.</p> <p>Thence</p> <p>S.89°53'W., on true line, bet. secs. 3 and 10.</p> <p>Asc. slightly over SE. slope; through scattering timber and undergrowth.</p> <p>4.85 Spur, slopes S.; desc. 324 ft. over W. slope.</p> <p>15.85 Wash, 10 lks. wide, course S.; asc. 298 ft. over SE. slope.</p> <p>27.65 Spur, slopes S.; desc. 282 ft. over W. slope.</p> <p>40.07 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock, with a lava stone, 12 x 6 x 4 ins., mkd. X, deposited at base, and in a mound of stone to top for $\frac{1}{4}$ sec. cor., with brass cap mkd.</p> <p style="text-align: center;"> $\frac{183}{4}$ $\frac{S10}{1934}$ </p> <p>Desc. 24 ft. over W. slope.</p> <p>41.75 Wash, 20 lks. wide, course S.10°W.; asc. 236 ft. over E. slope.</p> <p>49.45 Spur, slopes S.30°E.; desc. 180 ft. over SW. slope.</p> <p>59.85 Wash, 10 lks. wide, course SE.; asc. 181 ft. over NE. slope.</p> <p>70.65 Spur, slopes SE.; desc. 143 ft. over SW. slope.</p> <p>76.85 Wash, 10 lks. wide, course S.; asc. 105 ft. over E. slope.</p> <p>80.14 The cor. of secs. 3,4,9 and 10.</p> <p>Land: mountainous. Soil: sandy and gravelly loam, rocky, 4th rate. Timber: scattering ironwood, mesquite and palo verde. Undergrowth: greasewood, catclaw, ocotillo and cactus.</p> <hr/> <p>N.0°06'E., on random line, bet. secs. 3 and 4.</p> <p>40.00 Set temp. $\frac{1}{4}$ sec. cor.</p> <p>80.30 Intersect the N. bdy. of the Tp. at a point 36 lks. E. of the cor. of secs. 3,4,33 and 34, an iron post, 2 ins. diam., firmly set and mkd. on brass cap and witnessed as described in the official record of this Group.</p> <p>Thence</p> <p>S.0°10'E., on true line, bet. secs. 3 and 4.</p>
--------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

SUBDIVISIONS OF T.9 S., R.5 W.

25

BOOK 4057

Chains

- Asc. 89 ft. over rocky and broken NE. slope; through scattering timber and dense undergrowth.
- 1.80 Spur, slopes NW.; desc. 17 ft. over SW. slope.
- 8.40 Wash, 5 lks. wide, from S., course NW.; asc. 156 ft. up bed of wash.
- 16.40 Same wash, from SE., course N.; asc. 320 ft. over NW. slope.
- 24.40 Rocky spur, slopes NE.; desc. 320 ft. over SE. slope.
- 34.25 Wash, 5 lks. wide, course E.; asc. 20 ft. over N. slope.
- 35.30 Spur, slopes E.; desc. 27 ft. over S. slope.
- 38.40 Wash, 10 lks. wide, course NE.; asc. 46 ft. over N. slope.
- 40.30 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bedrock, with a lava stone, 12 x 4 x 4 ins., mkd. X, deposited at base, and in a mound of stone to top, for $\frac{1}{2}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
 S4 | S3
 1934

- Asc. 484 ft. over N. slope.
- 61.30 Spur, slopes E.; desc. 70 ft. over S. slope.
- 64.10 Wash, 5 lks. wide, course E.; asc. 17 ft.
- 70.15 Divide, bears E. and W.; desc. 158 ft. over SW. slope.
- 75.10 Wash, 4 lks. wide, course SE.; asc. 20 ft. over NE. slope.
- 80.30 The cor. of secs. 3, 4, 9 and 10.

Land: mountainous.
 Soil: sandy and gravelly loam, rocky, 4th rate.
 Timber: scattering ironwood, mesquite and palo verde.
 Undergrowth: greasewood, catclaw, ocotillo and cactus.

From the standard cor. of secs. 32 and 33, on the S. bdy. of the Tp., an iron post, 2 ins. diam., firmly set and mkd. on brass cap and witnessed as described in the official record of this Group,

N.0°02'W., bet. secs. 32 and 33.

Over gently rolling land; through scattering timber and dense undergrowth.

- 17.20 Wash, 30 lks. wide, course W.
- 33.60 Wash, 100 lks. wide, course W.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
 S32 | S33
 1934

and raise a mound

SUBDIVISIONS OF T.9 S., R.5 W.

Chains	<p>of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.</p> <p>51.20 Wash, 40 lks. wide, course W.</p> <p>60.00 Wash, 12 lks. wide, course W.</p> <p>66.20 Wash, 30 lks. wide, course W.</p> <p>74.60 Old road, bears NW. and SE.</p> <p>78.20 Wash, 50 lks. wide, course W.</p> <p>80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 28, 29, 32 and 33, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T9S</td> <td>R5W</td> </tr> <tr> <td>S29</td> <td>S28</td> </tr> <tr> <td>S32</td> <td>S33</td> </tr> <tr> <td colspan="2">1934</td> </tr> </table> </div> <p>and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.</p> <p>Land: gently rolling. Soil: sandy and gravelly loam, 1st and 2nd rates. Timber: scattering ironwood, mesquite and palo verde. Undergrowth: greasewood, catclaw, ocotillo and cactus.</p> <hr style="border-top: 1px dashed black;"/> <p>East, on random line, bet. secs. 28 and 33.</p> <p>40.00 Set temp. 1/4 sec. cor.</p> <p>79.94 A point 2 lks. N. of the cor. of secs. 27, 28, 33 and 34.</p> <p>Thence</p> <p>N. 89° 59' W., on true line, bet. secs. 28 and 33.</p> <p>Over gently rolling land; through scattering timber and dense undergrowth.</p> <p>39.97 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>1/4 S28</td> </tr> <tr> <td>1/4 S33</td> </tr> <tr> <td>1934</td> </tr> </table> </div> <p>and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.</p> <p>79.94 The cor. of secs. 28, 29, 32 and 33.</p> <p>Land: gently rolling. Soil: sandy and gravelly loam, 1st and 2nd rates. Timber: scattering ironwood, mesquite and palo verde. Undergrowth: greasewood, catclaw, ocotillo and cactus.</p> <hr style="border-top: 1px dashed black;"/> <p>N. 0° 02' W., bet. secs. 28 and 29.</p> <p>Over gently rolling land; through scattering timber and dense undergrowth.</p> <p>12.00 Wash, 10 lks. wide, course NW.</p>	T9S	R5W	S29	S28	S32	S33	1934		1/4 S28	1/4 S33	1934
T9S	R5W											
S29	S28											
S32	S33											
1934												
1/4 S28												
1/4 S33												
1934												

SUBDIVISIONS OF T.9 S., R.5 W.

POLK, 4057

Chains

16.90 Wash, 30 lks. wide, course NW.

21.10 Wash, 20 lks. wide, course W.

29.20 Wash, 15 lks. wide, course W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

	1	
S29		S28
	1934	

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

42.50 Wash, 40 lks. wide, course NW.

60.00 Wash, 20 lks. wide, course NW.

73.10 Wash, 100 lks. wide, course W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 20, 21, 28 and 29, with brass cap mkd.

T9S		R5W
S20		S21
S29		S28
	1934	

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Land: gently rolling.

Soil: sandy and gravelly loam, 1st and 2nd rates.

Timber: scattering ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw, ocotillo and cactus.

S. 89° 59' E., on random line, bet. secs. 21 and 28.40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.84 A point 7 lks. S. of the cor. of secs. 21, 22, 27 and 28.

Thence

S. 89° 58' W., on true line, bet. secs. 21 and 28.

Over flat; through scattering timber and dense undergrowth.

1.00 Base of hill, bears N. and S.; asc. 91 ft. over E. slope.

10.00 Top of hill, slopes SE.; desc. 35 ft. over W. slope.

16.00 Rim of hill, bears N. and S.; desc. 76 ft. along N. slope.

39.92 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S21		
S28		
	1934	

and raise a mound of

SUBDIVISIONS OF T.9 S., R.5 W.

Chains

stone, 2 ft. base, 1½ ft. high, N. of cor,

Asc. 16 ft. over E. slope.

42.45 Point of hill, slopes N.; desc. 22 ft. over W. slope.

45.00 Base of hill, bears NE. and S.; over gently rolling land.

79.84 The cor. of secs. 20, 21, 28 and 29.

Land: gently rolling and rolling.

Soil: sandy and gravelly loam, stony, 1st and 3rd rates.

Timber: scattering ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw, ocotillo and cactus.

N.0°02'W., bet. secs. 20 and 21.

Over gently rolling land; through scattering timber and dense undergrowth.

6.80 Wash, 15 lks. wide, course NW.

19.10 Wash, 10 lks. wide, course NW.

27.80 Wash, 20 lks. wide, course W.

29.10 Wash, 40 lks. wide, course SW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for ¼ sec. cor., with brass cap mkd.

	↑	
S20		S21
1934		

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

45.00 Wash, 40 lks. wide, course W.

49.10 Wash, 10 lks. wide, course SW.

66.40 Wash, 100 lks. wide, course NW.

69.70 Wash, 20 lks. wide, course W.

76.40 Wash, 40 lks. wide, course W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 16, 17, 20 and 21, with brass cap mkd.

T9S	R5W	
S17		S16
S20		S21
1934		

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land: gently rolling.

Soil: sandy and gravelly loam, 1st and 2nd rates.

Timber: scattering ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw, ocotillo and cactus.

SUBDIVISIONS OF T.9 S., R.5 W.

E. 1/4 Sec. 16

Chains

- N.89°58'E., on random line, bet. secs. 16 and 21.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 79.88 A point 5 lks. N. of the cor. of secs. 15,16,21 and 22.
- Thence
- West, on true line, bet. secs. 16 and 21.
- Over flat; through scattering timber and dense undergrowth.
- 13.20 Foot of hill, bears NW. and SE.; asc. 85 ft. over NE. slope.
- 18.20 Top of hill, bears NW. and SE.; desc. 108 ft. over W. slope.
- 36.00 Foot of hill, bears N. and S.; over gently rolling land.
- 39.94 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
- $$\begin{array}{r} 316 \\ + 321 \\ \hline 1934 \end{array}$$
- and raise a mound of
stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
- 45.20 Wash, 50 lks. wide, course SW.
- 79.88 The cor. of secs. 16,17,20 and 21.
- Land: gently rolling and rolling.
Soil: sandy and gravelly loam, stony, 1st and 3rd rates.
Timber: scattering ironwood, mesquite and palo verde.
Undergrowth: greasewood, catclaw, ocotillo and cactus.
-
- N.0°02'W., bet. secs. 16 and 17.
- Over gently rolling land; through scattering timber and dense undergrowth.
- 1.00 Wash, 15 lks. wide, course SW.
- 25.00 Wash, 5 lks. wide, course SW.; asc. 44 ft. over SE. slope.
- 28.50 Top of hill, bears NE. and SW.; desc. 46 ft. over NE. slope.
- 33.50 Foot of hill, bears NE. and SW.; over gently rolling land.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
- $$\begin{array}{r} 317 \\ + 316 \\ \hline 1934 \end{array}$$
- and raise a mound
of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
- 48.00 Wash, 20 lks. wide, course W.
- 65.00 Wash, 200 lks. wide, course W.
- 79.85 Enter wash, 30 lks. wide, course SW.

SUBDIVISIONS OF T.9 N., R.5 W.

Chains

80.00 True point for cor. of secs. 8,9,16 and 17 falls in wash; witness cor. established 1.00 ch. N.0°02'W. hereinafter described.

Land: gently rolling and rolling.
Soil: sandy and gravelly loam, rocky, 2nd and 4th rates.
Timber: scattering ironwood, mesquite and palo verde.
Undergrowth: greasewood, catclaw, ocotillo and cactus.

East, on random line, bet. secs. 9 and 16.

40.00 Set temp. sec. cor.

79.88 Intersect the cor. of secs. 9,10,15 and 16.

Thence

West, on true line, bet. secs. 9 and 16.

Asc. 77 ft. over E. slope; through scattering timber and undergrowth.

1.90 Spur, slopes S.; desc. 270 ft. over W. slope.

17.20 Wash, 20 lks. wide; course SW.; asc. 116 ft. over SE. slope.

26.05 Spur, slopes SE.; desc. 164 ft. over SW. slope.

39.94 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bedrock, and in a mound of stone to top, for sec. cor., with brass cap mkd.

$\frac{1}{4} \frac{39}{316}$

1934

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

Desc. 68 ft. over NW. slope.

49.60 Wash, 10 lks. wide, course S.; asc. 33 ft. over E. slope.

54.40 Top of hill, bears N. and S.; desc. 74 ft. over W. slope.

62.40 Foot of slope, bears N. and S.; over gently rolling land.

67.40 Wash, 20 lks. wide, course S.

79.88 The true point for cor. of secs. 8,9,16 and 17.

Land: gently rolling and rolling.
Soil: sandy and gravelly loam, rocky, 2nd and 3rd rates.
Timber: scattering ironwood, mesquite and palo verde.
Undergrowth: greasewood, ocotillo, catclaw and cactus.

N.0°02'W., bet. secs. 8 and 9.

Over gentle SW. slope; through scattering timber and undergrowth.

1.00 (1.00 N.0°02'W. of true point) Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for witness cor. to cor. of secs. 8,9,16 and 17, with brass cap mkd.

SUBDIVISIONS OF T.9 S., R.5 W.

BOOK 4057

Chains

T9S	R5W
S8	S9
S17	S16
W	C

1934

and raise a mound of
stone, 2 ft. base, 1½ ft. high, W. of cor.

11.20 Wash, 10 lks. wide, course SW.; asc. 250 ft. over S. slope.

23.10 Top of hill, bears NE. and SW.; desc. 191 ft. over NW. slope.

33.40 Foot of slope, bears NE. and SW.; over gently rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for ¼ sec. cor., with brass cap mkd.

S8	S9
----	----

1934

and raise a mound of
stone, 2 ft. base, 1½ ft. high, W. of cor.

52.10 Wash, 40 lks. wide, course SW.; asc. 145 ft. over SE. slope.

58.00 Spur, slopes SW.; desc. 91 ft. over NW. slope.

63.00 Rocky gulch, course SW.; asc. 220 ft. over S. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., on cross (X) chiseled on exposed bedrock, and in a mound of stone to top, for cor. of secs. 4, 5, 8 and 9, with brass cap mkd.

T9S	R5W
S5	S4
S8	S9

1934

Land: gently rolling and rolling.

Soil: sandy and gravelly loam, rocky, 2nd and 4th rates.

Timber: scattering ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw, ocotillo and cactus.

East, on random line, bet. secs. 4 and 9.

40.00 Set temp. ¼ sec. cor.

79.96 A point 23 lks. S. of the cor. of secs. 3, 4, 9 and 10.

Thence

S.89°50'W., on true line, bet. secs. 4 and 9.

Asc. 71 ft. over E. slope; through scattering timber and undergrowth.

2.10 Spur, slopes S.; desc. 46 ft. over W. slope.

8.50 Wash, 10 lks. wide, course SE.; asc. 93 ft. over E. slope.

18.40 Spur, slopes S.20°W.; desc. 169 ft. over W. slope.

SUBDIVISIONS OF T.9 S., R.5 W.

Chains	
20.80	Head of gulch, course SW.; asc. 100 ft. over SE. slope.
25.95	Spur, slopes SW.; desc. 420 ft. over NW. slope.
39.98	Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{c} \frac{1}{4} S4 \\ \frac{1}{4} S9 \\ 1934 \end{array}$
	and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
	Desc. 52 ft. over W. slope.
43.00	Wash, 20 lks. wide, course SW.; asc. 314 ft. over SE. slope.
60.60	Rocky spur, slopes SW.; desc. 275 ft. over NW. slope.
73.00	Gulch, course SW.; asc. 165 ft. over E. slope.
79.96	The cor. of secs. 4, 5, 8 and 9.
	Land: mountainous. Soil: sandy and gravelly loam, rocky, 4th rate. Timber: ironwood, mesquite and palo verde. Undergrowth: greasewood, catclaw, cactus and ocotillo.

	N.0°10'W., on random line, bet. secs. 4 and 5.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.18	A point 19 lks. W. of the cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp., an iron post, 2 ins. diam., firmly set and mkd. on brass cap and witnessed as described in the official record of this Group.
	Thence
	S.0°02'E., on true line, bet. secs. 4 and 5.
	Asc. 170 ft. along W. slope; through scattering timber and undergrowth.
11.00	Wash, 20 lks. wide, course NW.; asc. 495 ft. over NE. slope.
35.20	Spur, slopes SW.; desc. 134 ft. over S. slope.
40.18	Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{c} \frac{1}{4} \\ S5 S4 \\ 1934 \end{array}$
	and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
	Desc. 130 ft. over SW. slope.
52.40	Head of gulch, course SW.; asc. 121 ft. over NW. slope.
61.50	Spur, slopes SW.; desc. 380 ft. over S. slope.
80.18	The cor. of secs. 4, 5, 8 and 9.

SUBDIVISIONS OF T.9 S., R.5 W.

33

4001

Chains

Land: mountainous.
 Soil: sandy and gravelly loam, rocky, 4th rate.
 Timber: scattering ironwood, mesquite and palo verde.
 Undergrowth: greasewood, catclaw, ocotillo and cactus.

From the standard cor. of secs. 31 and 32, on the S. bdy. of the Tp., an iron post, 2 ins. diam., firmly set and mkd. on brass cap and witnessed as described in the official record of this Group.

N.0°03'W., bet. secs. 31 and 32.

Over gently rolling land; through scattering timber and dense undergrowth.

13.80 Wash, 10 lks. wide, course W.

27.20 Wash, 20 lks. wide, course W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
S31 S32
1934

and raise a mound of
stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

41.10 Wash, 20 lks. wide, course W.

62.00 Wash, 100 lks. wide, course W.

73.80 Wash, 60 lks. wide, course W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 29, 30, 31 and 32, with brass cap mkd.

T9S	R5W
S30	S29
S31	S32
1934	

and raise a mound of
stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land: gently rolling.
 Soil: sandy and gravelly loam, 2nd and 3rd rates.
 Timber: scattering ironwood, mesquite and palo verde.
 Undergrowth: greasewood, catclaw, ocotillo and cactus.

East, on random line, bet. secs. 29 and 32.

40.00 Set temp. $\frac{1}{2}$ sec. cor.

79.98 A point 7 lks. N. of the cor. of secs. 28, 29, 32 and 33.

Thence

N.89°57'W., on true line, bet. secs. 29 and 32.

Over gently rolling land; through scattering timber and dense undergrowth.

10.00 Old road, bears NW. and SE.

Chains

39.99 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S29
 $\frac{1}{4}$ S32
1934

and raise a mound of
stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

79.98 The cor. of secs. 29,30,31 and 32.

Land: gently rolling.
Soil: sandy and gravelly loam, stony, 3rd rate.
Timber: scattering ironwood, mesquite and palo verde.
Undergrowth: greasewood, catclaw, ocotillo and cactus.

West, on random line, bet. secs. 30 and 31.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.92 Intersect the W. bdy. of the Tp. at a point 7 lks. S. of the cor. of secs. 25,30,31 and 36, an iron post, 2 ins. diam., firmly set and mkd. on brass cap and witnessed as described in the official record of this Group.

Thence

S.89°57'E., on true line, bet. secs. 30 and 31.

Over gently rolling land; through scattering timber and dense undergrowth.

39.92 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S30
 $\frac{1}{4}$ S31
1934

and raise a mound of
stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

67.30 Wash, 50 lks. wide, course NW.

79.92 The cor. of secs. 29,30,31 and 32.

Land: gently rolling.
Soil: sandy and gravelly loam, stony, 3rd rate.
Timber: scattering ironwood, mesquite and palo verde.
Undergrowth: greasewood, catclaw, ocotillo and cactus.

N.0°03'W., bet. secs. 29 and 30.

Over gently rolling land; through scattering timber and dense undergrowth.

1.40 Wash, 5 lks. wide, course W.

31.30 Wash, 10 lks. wide, course W.

35.00 Old road, bears NW. and SE.

SUBDIVISIONS OF T.9 S., R.5 W.

FOUR 4087

Chains

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ \hline S30 | S29 \\ \hline 1934 \end{array}$$

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

43.10 Wash, 20 lks. wide, course W.

55.20 Wash, 5 lks. wide, course W.

60.90 Wash, 30 lks. wide, course W.

67.00 Wash, 5 lks. wide, course W.

74.70 Wash, 30 lks. wide, course W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 19, 20, 29 and 30, with brass cap mkd.

$$\begin{array}{c} T9S | R5W \\ \hline S19 | S20 \\ \hline S30 | S29 \\ \hline 1934 \end{array}$$

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land: gently rolling.

Soil: sandy and gravelly loam, 2nd rate.

Timber: scattering ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw, ocotillo and cactus.

S.89°57'E., on random line, bet. secs. 20 and 29.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.02 A point 2 lks. S. of the cor. of secs. 20, 21, 28 and 29.

Thence

N.89°58'W., on true line, bet. secs. 20 and 29.

Over gently rolling land; through scattering timber and dense undergrowth.

40.01 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor.; with brass cap mkd.

$$\begin{array}{c} S20 \\ \hline \frac{1}{4} S29 \\ \hline 1934 \end{array}$$

and dig pits, 18 x 18 x 12 ins., E. and W. of post, 3 ft. dist.

80.02 The cor. of secs. 19, 20, 29 and 30.

Land: gently rolling.

Soil: sandy and gravelly loam, 1st and 2nd rates.

Timber: scattering ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw, ocotillo and cactus.

SUBDIVISIONS OF T.9 S., R.5 W.

Chains	
	N.89°57'W., on random line, bet. secs. 19 and 30.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.86	Intersect the W. bdy. of the Tp. at a point 5 lks. N. of the cor. of secs. 19, 24, 25 and 30, an iron post, 2 ins. diam., firmly set and mkd. on brass cap and witnessed as described in the official record of this Group.
	Thence
	S.89°59'E., on true line, bet. secs. 19 and 30.
	Over gently rolling land; through scattering timber and undergrowth.
14.75	Wash, 15 lks. wide, course N.80°W.
39.86	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{r} .819 \\ \frac{1}{4} \\ \hline .819 \\ \hline S30 \\ 1934 \end{array}$
	and raise a mound of
	stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
46.55	Wash, 30 lks. wide, course NW.
58.00	Wash, 100 lks. wide, course NW.
79.86	The cor. of secs. 19, 20, 29 and 30.
	Land: gently rolling. Soil: sandy and gravelly loam, 1st and 2nd rates. Timber: ironwood, mesquite and palo verde. Undergrowth: greasewood, catclaw, ocotillo and cactus.

	N.0°03'W., bet. secs. 19 and 20.
	Over gently rolling land; through scattering timber and dense undergrowth.
5.60	Wash, 10 lks. wide, course W.
25.75	Wash, 20 lks. wide, course W.
27.20	Wash, 12 lks. wide, course W.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{r} \frac{1}{4} \\ S19 \mid S20 \\ \hline 1934 \end{array}$
	and raise a mound of
	stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
40.30	Wash, 4 lks. wide, course W.
55.30	Wash, 10 lks. wide, course W.
75.00	Wash, 20 lks. wide, course W.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the

SUBDIVISIONS OF T.9 S., R.5 W.

BOOK 4057

Chains

ground, for cor. of secs. 17,18,19 and 20, with brass cap mkd.

T9S R5W	
S18	S17
S19	S20
1934	

and raise a mound
of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land: gently rolling.

Soil: sandy and gravelly loam, 1st and 2nd rates.

Timber: scattering ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw, ocotillo and cactus.

S.89°58'E., on random line, bet. secs. 17 and 20.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.00 A point 5 lks. S. of the cor. of secs. 16,17,20 and 21.

Thence

West, on true line, bet. secs. 17 and 20.

Over gently rolling land; through scattering timber and dense undergrowth.

28.40 Wash, 60 lks. wide, course NW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ S17	
$\frac{1}{4}$ S20	
1934	

and raise a mound of
stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

80.00 The cor. of secs. 17,18,19 and 20.

Land: gently rolling.

Soil: sandy and gravelly loam, 1st and 2nd rates.

Timber: ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw, ocotillo and cactus.

N.89°59'W., on random line, bet. secs. 18 and 19.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.78 Intersect the W. bdy. of the Tp. at a point 7 lks. N. of the cor. of secs. 13,18,19 and 24, an iron post, 2 ins. diam., firmly set and mkd. on brass cap and witnessed as described in the official record of this Group.

Thence

N.89°58'E., on true line, bet. secs. 18 and 19.

Over gently rolling land; through scattering timber and dense undergrowth.

39.78 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

SUBDIVISIONS OF T.9 S., R.5 W.

Chains

$$\begin{array}{r} \frac{1}{4}S18 \\ \frac{1}{4}S19 \\ 1934 \end{array}$$

and raise a mound of
stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

79.78 The cor. of secs. 17, 18, 19 and 20.

Land: gently rolling.
Soil: sandy and gravelly loam, 1st and 2nd rates.
Timber: ironwood, mesquite and palo verde.
Undergrowth: greasewood, catclaw, ocotillo and cactus.

N.0°03'W., bet. secs. 17 and 18.

Over gently rolling land; through scattering timber and
dense undergrowth.

8.15 Wash, 5 lks. wide, course W.

17.40 Wash, 5 lks. wide, course W.

24.70 Wash, 12 lks. wide, course W.

36.00 Wash, 20 lks. wide, course W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
$$\begin{array}{c} \frac{1}{4} \\ S18 | S17 \\ 1934 \end{array}$$

and raise a mound of
stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

47.00 Wash, 300 lks. wide, course NW:

74.60 Wash, 30 lks. wide, course NW.

75.00 Foot of slope, bears E. and W.; asc. 102 ft. over S. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the
ground to bedrock, and in a mound of stone to top, for
cor. of secs. 7, 8, 17 and 18, with brass cap mkd.
$$\begin{array}{c} T9S R5W \\ \frac{37}{S18} | \frac{38}{S17} \\ 1934 \end{array}$$

and raise a mound of
stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Land: gently rolling and rolling.
Soil: sandy and gravelly loam, 2nd and 3rd rates.
Timber: scattering ironwood, mesquite and palo verde.
Undergrowth: greasewood, catclaw, ocotillo and cactus.

East, on random line, bet. secs. 8 and 17.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.10 A point 12 lks. S. of the true point for cor. of secs. 8,

SUBDIVISIONS OF T.9 S., R.5 W.

BOOK 4057

Chains	
	9,16 and 17.
	Thence
	S.89°55'W., on true line, bet. secs. 8 and 17.
	Over gently rolling land; through scattering timber and undergrowth.
8.00	Wash, 20 lks. wide, course SW.; asc. 178 ft. over SE.slope.
16.40	Top of hill, bears NE. and SW.; desc. 175 ft. over NW. slope.
22.90	Wash, 20 lks. wide, course S.20°W.; asc. 80 ft. over E. slope.
28.35	Top of hill, bears N. and S.; desc. 74 ft. over W. slope.
35.00	Wash, 20 lks. wide, course S.; over gently rolling land.
40.05	Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{r} 138 \\ \hline 4317 \\ 1934 \end{array}$
	and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
	Asc. 81 ft. over E. slope.
45.70	Top of hill, bears NE. and SW.; desc. 91 ft. over W.slope.
54.80	Wash, 20 lks. wide, course S.; over gently rolling land.
67.40	Wash, 20 lks. wide, course SW.
75.60	Wash, 30 lks. wide, course SW.; asc. 108 ft. over SE.slope.
80.10	The cor. of secs. 7,8,17 and 18.
	Land: gently rolling and rolling. Soil: sandy and gravelly loam, rocky, 2nd and 4th rates. Timber: scattering ironwood, mesquite and palo verde. Undergrowth: greasewood, catclaw, ocotillo and cactus.

	S.89°58'W., on random line, bet. secs. 7 and 18.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.72	Intersect the W. bdy. of the Tp. at a point 7 lks. N. of the cor. of secs. 7,12,13 and 18, an iron post, 2 ins. diam., firmly set and mkd. on brass cap and witnessed as described in the official record of this Group.
	Thence
	N.89°55'E., on true line, bet. secs. 7 and 18.
	Over gently rolling land; through scattering timber and undergrowth.
3.00	Wash, 20 lks. wide, course N.

SUBDIVISIONS OF T.9 S., R.5 W.

Chains	
12.40	Foot of slope, bears N. and S.; asc. 52 ft. over W. slope.
20.60	Top of hill, bears N. and S.; desc. 48 ft. over E. slope.
24.70	Wash, 10 lks. wide, course NW.; over gently rolling land.
39.72	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4} \begin{array}{l} S7 \\ S18 \end{array}$ 1934
	and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
	Asc. 57 ft. over W. slope.
44.60	Top of hill, bears N. and S.; desc. 65 ft. over E. slope.
49.60	Foot of slope, bears N. and S.; over gently rolling land.
56.70	Wash, 50 lks. wide, course NW.
66.60	Wash, 10 lks. wide, course SW.; asc. 152 ft. over NW. slope.
78.00	Spur, slopes SW.; desc. 37 ft. over SE. slope.
79.72	The cor. of secs. 7, 8, 17 and 18.
	Land: gently rolling and hills. Soil: sandy and gravelly loam, rocky, 2nd and 4th rates. Timber: ironwood, mesquite and palo verde. Undergrowth: greasewood, catclaw, ocotillo and cactus.

	N.0°03'W., bet. secs. 7 and 8.
	Asc. 75 ft. over SE. slope; through scattering timber and undergrowth.
3.35	Spur, slopes SW.; desc. 107 ft. over NW. slope.
13.00	Head of gulch, course SW.; asc. 46 ft. over S. slope.
15.00	Spur, slopes W.; desc. 107 ft. over N. slope.
19.75	Wash, 20 lks. wide, course W.; over gently rolling land.
28.00	Wash, 60 lks. wide, course S.70°W.; asc. 118 ft. over S. slope.
39.50	Over top of hill, bears E. and W.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4} \begin{array}{l} S7 \\ S8 \end{array}$ 1934
	and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
	Desc. 135 ft. over N. slope.
46.75	Wash, 15 lks. wide, course W.; asc. 199 ft. over S. slope.

SUBDIVISIONS OF T.9 S., R.5 W.

4097

- Chains
- 59.80 Rocky spur, slopes W.; desc. 281 ft. over N. slope.
- 71.60 Wash, 20 lks. wide, course S.60°W.; asc. 226 ft. over S. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 5,6,7 and 8, with brass cap mkd.

T9S R5W
 S6 | S5
 S7 | S8
 1934

and raise a mound of
 stone, 2 ft. base, 1½ ft. high, W. of cor.

Land: rolling.
 Soil: sandy and gravelly loam, rocky, 2nd and 4th rates.
 Timber: ironwood, mesquite and palo verde.
 Undergrowth: greasewood, catclaw, ocotillo and cactus.

N.89°55'E., on random line, bet. secs. 5 and 8.

- 40.00 Set temp. ¼ sec. cor.
- 80.10 A point 35 lks. N. of the cor. of secs. 4,5,8 and 9.
- Thence
- N.89°50'W., on true line, bet. secs. 5 and 8.
- Desc. 113 ft. along S. slope; through scattering timber and undergrowth.
- 9.30 Spur, slopes S.20°W.; desc. 160 ft. over SW. slope.
- 18.10 Wash, 10 lks. wide, course SW.; over gently rolling land.
- 24.90 Wash, 20 lks. wide, course SW.; asc. 20 ft. over E. slope.
- 28.10 Rocky spur, slopes S.; desc. 50 ft. over W. slope.
- 34.70 Wash, 20 lks. wide, course S.; asc. 155 ft. over E. slope.
- 40.05 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for ¼ sec. cor., with brass cap mkd.

S5
 S8
 1934

and raise a mound of
 stone, 2 ft. base, 1½ ft. high, N. of cor.

Asc. 310 ft. over E. slope.

- 52.80 Spur, slopes S.; desc. 522 ft. over W. slope.
- 69.80 Wash, 20 lks. wide, course SW.; asc. 170 ft. over SE. slope.
- 80.10 The cor. of secs. 5,6,7 and 8.

Land: mountainous and rolling.
 Soil: sandy and gravelly loam, 2nd and 4th rates.
 Timber: scattering ironwood, mesquite and palo verde.
 Undergrowth: greasewood, catclaw, ocotillo and cactus.

SUBDIVISIONS OF T.9 S., R.5 W.

Chains	S.89°55'W., on random line, bet. secs. 6 and 7.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.60	Intersect the W. bdy. of the Tp. at a point 33 lks. S. of the cor. of secs. 1,6,7 and 12, an iron post, 2 ins. diam., firmly set and mkd. on brass cap and witnessed as described in the official record of this Group.
	Thence
	S.89°51'E., on true line, bet. secs. 6 and 7.
	Desc. 247 ft. over broken rocky SE. slope; through scattering timber and undergrowth.
15.90	Wash, 10 lks. wide, course SW.; asc. 142 ft. over W. slope.
27.50	Spur, slopes SW.; desc. 135 ft. over E. slope.
35.40	Wash, 20 lks. wide, course SW.; over gently rolling land.
39.60	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{2}$ <u>S6</u> S7
	1934
	and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
	Asc. 120 ft. over NW. slope.
47.00	Spur, slopes SW.; desc. 121 ft. over SE. slope.
56.60	Wash, 30 lks. wide, course SW.; asc. 280 ft. over NW. slope.
71.10	Spur, slopes SW.; desc. 51 ft. over SE. slope.
79.60	The cor. of secs. 5,6,7 and 8.
	Land: mountainous and rolling. Soil: sandy and gravelly loam, rocky, 2nd and 4th rates. Timber: scattering ironwood, mesquite and palo verde. Undergrowth: greasewood, catclaw, ocotillo and cactus.
	N.0°02'W., on random line, bet. secs. 5 and 6.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80:22	Intersect the N. bdy. of the Tp. at a point 19 lks. E. of the cor. of secs. 5,6,31 and 32, an iron post, 2 ins. diam., firmly set and mkd. on brass cap and witnessed as described in the official record of this Group.
	Thence
	S.0°10'E., on true line, bet. secs. 5 and 6.
	Asc. 227 ft. over NE. slope; through scattering timber and undergrowth.
10.60	Spur, slopes NW.; desc. 40 ft. along W. slope.
16.60	Head of gulch, course W.; asc. 115 ft. along W. slope.

SUBDIVISIONS OF T.9 S., R.5 W.

1900 4057

Chains

- 26.60 Ridge, bears NE. and SW.; desc. 312 ft. over SE. slope.
- 40.22 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground; and supported in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
- $\frac{1}{4}$
 S6 | S5
 1934
- and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
- Desc. 10 ft. over SE. slope.
- 43.60 Wash, 40 lks. wide, course SW.; asc. 109 ft. over NW. slope.
- 53.20 Spur, slopes SW.; desc. 102 ft. over SE. slope.
- 68.00 Wash, 20 lks. wide, course SW.; asc. 185 ft. over NW. slope.
- 72.30 Spur, slopes SW.; desc. 249 ft. over SE. slope.
- 80.22 The cor. of secs. 5, 6, 7 and 8.

Land: mountainous.

Soil: sandy and gravelly loam, rocky, 3rd and 4th rates.

Timber: scattering ironwood, mesquite and catclaw.

Undergrowth: greasewood, catclaw, ocotillo and cactus.

GENERAL DESCRIPTION

The township is situated about 19 miles south-westerly from the town of Gila Bend, Arizona. A secondary road, branching from the Gila Bend-Ajo highway, runs south-easterly through the SW. part of the township.

Over half of the township, which lies on the SW. slope of the Saucedo Mts., is mountainous, with soil generally shallow and rocky and of volcanic origin. The peak of **Hat Mountain**, located 10 chs. S. of the $\frac{1}{4}$ sec. cor. of secs. 14 and 23, is the highest point in the township. Its elevation is approximately 2600 ft. above sea-level, about 1200 ft. above the gently rolling SW. portion of the township. The SW. portion, comprising an area of about 12 sections, is nearly flat, with shallow washes draining to the west, with sandy and gravelly loam soil, frequently of good depth and free of rocks.

Vegetation is of the varieties common to the southern part of Arizona, predominating in the order listed at the end of the notes of the individual miles. The striking sentinel-like saguaro is one of the varieties of cacti. It is expected that the heavier varieties of desert growth suitable for fuel will soon be removed for use of the urban population.

The presence of ironwood trees indicates a climate suitable for the growth of citrus fruit, though no possible source of water for the necessary irrigation is now evident. Without some development of water there is no possibility of exploiting even the small grazing possibilities of the township. The few water pockets worn in the bedrock of the steeper washes and ravines store only sufficient water for the deer and mountain sheep, several of which were seen. There is no other water.

Township 9 South, Range 5 W.

The entire township, together with areas north and east, would make an excellent game refuge.

There are no settlers, no industries, no improvements and no mineral developments.

BOOK 4057

4-679 b

~~INDEX~~ **DIAGRAM.**

Township 9 South, Range 5 West

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

6-4817

_____ Surveyed by Dexter S. King, Temporary Transitman.

----- Surveyed by Gilden Redewill, Temporary Transitman.

_____ Surveyed by Robt. H. Williams, Temporary Transitman.

----- Surveyed by R. E. McMahan, Temporary Transitman.

_____ Surveyed by Frank C. Mulford, Temporary Transitman.

----- Surveyed by Ben D. Procter, Temporary Transitman.

----- Surveyed by Walter H. Good, U. S. Surveyor.

4-680
(August, 1926)

FIELD ASSISTANTS.
to
R. E. McMahan, Temporary Transitman

NAMES.	CAPACITY.
W. E. Thompson	1st Chainman
George H. Lindberg	2nd Chainman
R. D. Riggins	2nd Chainman
J. E. Carlin	Flagman
S. A. Berry	Cornerman
O. A. Brown	Cornerman
Sam Burger	Cornerman
J. C. Chamberlain	Axman
Gordon Wainwright	Axman

100
47
BOOK 4057

CERTIFICATE OF UNITED STATES SURVEYOR

I, R. E. McMahan *Temporary Transitman*, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Arizona bearing date of the 12th day of December, 1933, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the SUBDIVISION LINES of
Township 9 South, Range 5 West
of the Gila and Salt
River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

R. E. McMahan
Temporary Transitman.

APPROVAL

~~OFFICE OF U. S. SUPERVISOR OF SURVEYS,~~

~~19~~

~~The foregoing field notes of the survey of~~

~~executed by~~
~~under his special instructions dated~~, ~~10~~, ~~having been~~
~~critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys~~
~~they describe, are hereby approved.~~

~~U. S. Supervisor of Surveys.~~

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~
~~, has been correctly copied from the original notes on file in this office.~~

~~U. S. Supervisor of Surveys.~~

102

49

BOOK 4057

CERTIFICATE OF UNITED STATES SURVEYOR

I, Gilden Redewill *Temporary Transitman*, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Arizona bearing date of the 12th day of December, 1933, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of Arizona the SUBDIVISION LINES of _____

Township 9 South, Range 5 West _____
 _____ of the Gila and Salt _____
River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Gilden Redewill

Temporary Transitman

~~APPROVAL~~

~~OFFICE OF U. S. SUPERVISOR OF SURVEYS,~~

_____, 19____

~~The foregoing field notes of the survey of~~ _____

~~executed by~~ _____

~~under his special instructions dated~~ _____, 10, ~~having been~~
~~critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys~~
~~they describe, are hereby approved.~~

~~U. S. Supervisor of Surveys.~~

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~ _____

~~, has been correctly copied from the original notes on file in this office.~~

~~U. S. Supervisor of Surveys.~~

BOOK 4057

4-680
(August, 1926)

FIELD ASSISTANTS.
to

Frank C. Mulford, Temporary Transitman

NAMES.	CAPACITY.
J.H. McVey	1st Chainman
Roy A. Drake	2nd Chainman
G.B. Ruiz	Flagman
J.C. Bigger	Rear Flagman
George W. Bellas	Cornerman
A.C. Bucher	Cornerman
E.M. Heathington	Axman
Ed. Storey	Axman

104

51

BOOK 4057

CERTIFICATE OF UNITED STATES SURVEYOR

I, Frank C. Mulford *Temporary Transitman*, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Arizona bearing date of the 12th day of December, 1933, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the SUBDIVISION LINES of
Township 9 South, Range 5 West
of the Gila and Salt
River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Frank C. Mulford
Temporary Transitman.

~~APPROVAL~~

~~OFFICE OF U. S. SUPERVISOR OF SURVEYS,~~

~~, 19~~

~~The foregoing field notes of the survey of~~

~~executed by~~

~~under his special instructions dated~~ 10 ~~, 19~~ ~~having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.~~

~~U. S. Supervisor of Surveys.~~

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~
~~, has been correctly copied from the original notes on file in this office.~~

~~U. S. Supervisor of Surveys.~~

4-680
(August, 1926)

FIELD ASSISTANTS.
to

Dexter S. King, Temporary Transitman

NAMES.	CAPACITY.
C.R. Tonneman	1st Chainman
R.D. Lewis	2nd Chainman
George H. Lindberg	2nd Chainman
Lloyd Harroll	Flagman
Chas. L. Turner	Rear Flagman
Frank P. Hebert	Cornerman
G.C. Cole	Cornerman
Earl Cline	Axman
John Horcy	Axman

106
53
BOOK 4057

CERTIFICATE OF UNITED STATES SURVEYOR

I, Dexter S. King *Temporary Transitman*, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Arizona bearing date of the 12th day of December, 1933, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the SUBDIVISION LINES of
Towship 9 South, Range 5 West
of the Gila and Salt
River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Dexter S. King
Temporary Transitman

~~APPROVAL~~

~~OFFICE OF U. S. SUPERVISOR OF SURVEYS,~~

~~, 10~~

~~The foregoing field notes of the survey of~~

~~executed by~~
~~under his special instructions dated~~ 10 ~~, 10~~ ~~having been~~
~~critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys~~
~~they describe, are hereby approved.~~

~~U. S. Supervisor of Surveys.~~

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~
~~has been correctly copied from the original notes on file in this office.~~

~~U. S. Supervisor of Surveys.~~

ECOM 4057

4-680
(August, 1926)

FIELD ASSISTANTS.

to
Robt. H. Williams, Temporary Transitman

NAMES.	CAPACITY.
G.C. Capes	1st Chainman
Odis Kent	2nd Chainman
Harmon Yoakum	Flagman
A.L. Hart	Cornerman
LeRoy De Brown	Cornerman
R.P. Childers	Axman
Albert Scott	Axman

110
57
BOOK 4057

CERTIFICATE OF UNITED STATES SURVEYOR

I, Robt. H. Williams *Temporary Transitman*, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Arizona bearing date of the 12th day of December, 1933, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the SUBDIVISION LINES of
Township 9 South, Range 5 West
of the Gila and Salt
River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Robt. H. Williams
Temporary Transitman.

~~APPROVAL~~

~~OFFICE OF U. S. SUPERVISOR OF SURVEYS,~~

~~19~~

~~The foregoing field notes of the survey of~~

~~executed by~~

~~under his special instructions dated~~, ~~10~~, ~~having been~~
~~critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys~~
~~they describe, are hereby approved.~~

~~U. S. Supervisor of Surveys.~~

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~

~~, has been correctly copied from the original notes on file in this office.~~

~~U. S. Supervisor of Surveys.~~

4-680
(August, 1926)

FIELD ASSISTANTS.
to
Walter H. Good, U.S. Surveyor

NAMES.	CAPACITY.
Bert E. Wakeman	1st Chainman
H. A. Weedon	2nd Chainman
John Ludtke	2nd Chainman
Ed. A. Kyle	2nd Chainman
Albert Blevins	Flagman
Albert Jennings	Axman
Priest High	Cornerman

112
59
BOOK 4057

CERTIFICATE OF UNITED STATES SURVEYOR

I, Walter H. Good, U.S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Arizona bearing date of the 12th day of December, 1933, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the SUBDIVISION LINES of
Township 9 South, Range 5 West
of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Walter H. Good
U.S. Surveyor

APPROVAL

OFFICE OF U. S. SUPERVISOR OF SURVEYS,
Denver, Colorado, May 16, 1935.

The foregoing field notes of the survey of the SUBDIVISION LINES of
Township 9 South, Range 5 West
of the Gila and Salt River Base and Meridian, in the State of Arizona
executed by Walter H. Good, U.S. Surveyor
R.E. McMahan Gilden Redewill Frank C. Mulford
Dexter S. King Ben D. Procter Robt. H. Williams
Temporary Transmitters

under special instructions dated December 12, 1933- Group 199, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Charles H. Johnson
U. S. Supervisor of Surveys.

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~
~~has been correctly copied from the original notes on file in this office.~~

~~U. S. Supervisor of Surveys.~~