

Book "D"  
4-079

BOOK 4065

## FIELD NOTES

OF THE RESURVEY OF

GILA and SALT RIVER MERIDIAN thru T. 13 N.

3rd STANDARD PARALLEL NORTH thru R. 1 W.

SOUTH BOUNDARY of T. 14 N., R. 1 W.

WEST BOUNDARY and

PART OF THE SUBDIVISION LINES of

TOWNSHIP 13 NORTH, RANGE 1 WEST.

AND OF THE SURVEY OF

PART (Completion) of SUBDIVISION LINES

and

TRACT No. 37 and TRACT No. 38

of

TOWNSHIP 13 NORTH, RANGE 1 WEST.

Of the GILA and SALT RIVER BASE and Meridian,

in the State of ARIZONA

EXECUTED BY

Benjamin J. Kinsey, U. S. Surveyor

In the capacity of U. S. Surveyor..., under Special Instructions dated April 16, 1930..., issued by the District Cadastral Engineer to govern surveys included in Group 157 Arizona..., which were approved by the Commissioner of the General Land Office, April 25, 1930..., and Assignment Instructions dated June 12, 1933...

Survey and - Survey commenced June 21, 1933

Resurvey and - Survey completed October 8, 1933


# INDEX DIAGRAM.

Township \_\_\_\_\_, Range \_\_\_\_\_

6	5	4	3	2	1
7	8	9	10	11	12
13	17	16	15	14	13
19	20	21	22	23	24
29	29	28	27	26	25
31	32	33	34	35	36

INDEX DIAGRAM.

BOOK 4065

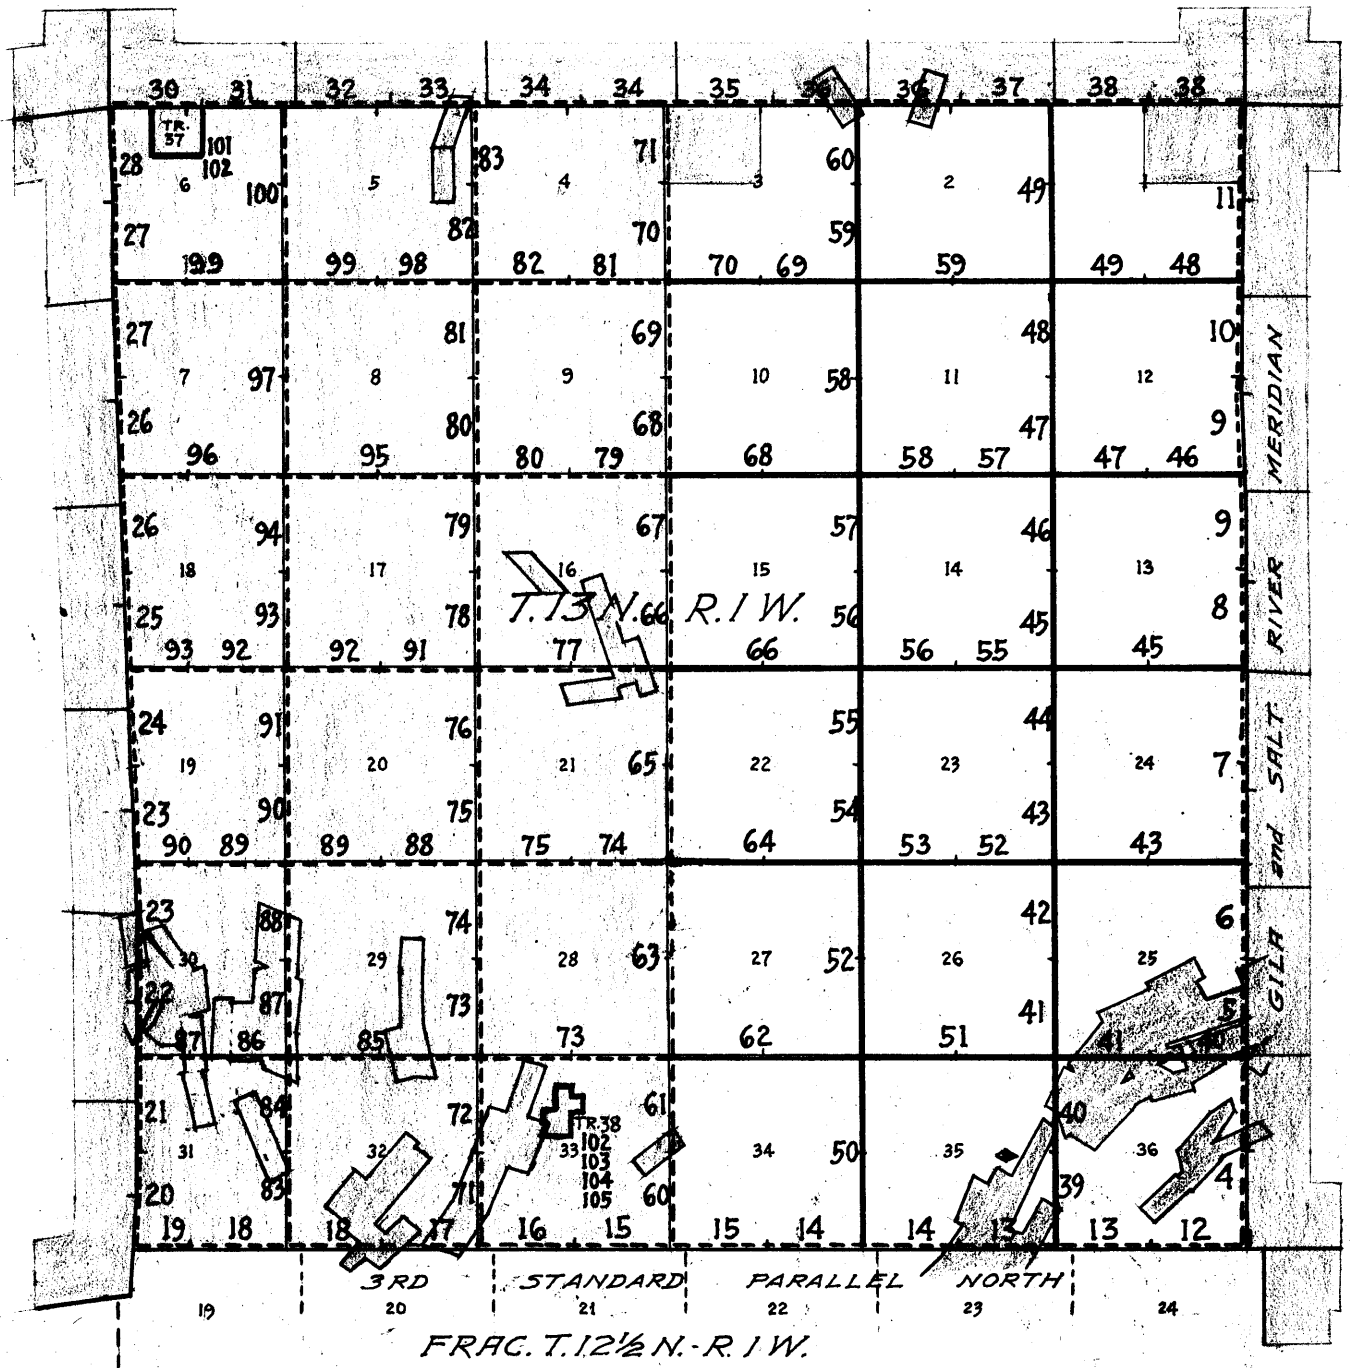

- Accepted surveys and resurveys.
- - - Unserved.
- Surveyed under this group, Notes herein.
- - - Resurveyed under this group, Notes herein.
- ▭ Areas surveyed as per accepted plats on file, including patented mining claims.

The resurveys and surveys herein described were executed by Benjamin J. Kinsey, U.S. Surveyor, using Buff Transit No. 18,000. The instrument is equipped with the Smith Solar attachment and otherwise conforms to the standard requirements of the General Land Office.

The instrument was examined, tested on the true meridian at the Federal Building, Phoenix, Arizona, found correct and approved by the District Cadastral Engineer of Arizona and California, conditional upon satisfactory field tests.

All measurements are made with a Lallie 5-chain steel tape, compared with a Lufkin standard steel tape and found correct. The measurements are made on the slope, the vertical angle determined and slope measurements properly reduced to true horizontal values.

PRELIMINARY FIELD TEST  
of  
Buff Transit No. 18,000  
by  
Benjamin J. Kinsey, U.S. Surveyor.

June, 21, 1933: at my station in sec. 29, T. 13 N., R. 1 W., G. & S. R. B. & M., Arizona, about 20 chs. SW of cor. of secs. 20, 21, 28, and 29, approximate longitude  $112^{\circ}22\frac{1}{2}'W$ . and latitude  $34^{\circ}29'N$ ., determined as hereinafter described, examine the adjustments of the transit and find no errors. To test the adjustments of the solar attachment proceed as follows:

June 22: at 1h. 41m., a.m., l.m.t., observe Polaris at eastern elongation, making four observations, two each with the telescope in direct and reversed positions, and marking the mean point in the line thus determined by a tack set in top of a peg, driven firmly in the ground about 5 chs. N.

Azimuth of Polaris at eastern elongation:  $1^{\circ}17'$ .

At daylight lay off the azimuth of Polaris  $1^{\circ}17'$  to the west and mark the meridian thus determined by a tack set in top of a peg driven firmly in the ground about 5 chs. N.

At 9h. 00m., a.m., app. t., set off  $34^{\circ}29' N$ . on lat. arc,  $23^{\circ}27' N$ ., on decl. arc, and determine a meridian with the solar which agrees with the true meridian.

At 12h. 00m., app. noon, with lat. arc unchanged observe the sun on the meridian; the resultant reading of the decl. arc is  $23^{\circ}27' N$ ., which agrees with the computed declination of the sun.

At 3h. 00m., p.m., app. t., with lat. arc unchanged set off  $23^{\circ}27' N$ ., on decl. arc and determine a meridian with the solar which agrees with the true meridian.

As all of the observations taken within the usual hours of solar work agree within 1' of the true meridian conclude that the instrument is in a satisfactory state of adjustment.

OBSERVATION UPON POLARIS  
for  
Latitude.

July, 2, 1933: at same station in sec. 29 as described on page 1 hereof, I make an altitude observation upon Polaris for latitude, making four observations, two each with the telescope in direct and reversed positions:

Watch fast of 105 <sup>th</sup> . Meridian time	
by comparison:	1m.00s.
Mean watch time of observation:	6h. 54m. 00s.
Mean observed vertical angle :	33° 27' 00"
Reduced latitude:	34° 29' 00"

OBSERVATION UPON THE SUN  
for  
Time and Latitude.

August, 27, 1933: at same station in sec. 29, as described on page 1 hereof, I make a meridian observation upon the sun for time and latitude, observing simultaneously the altitude of the suns lower limb and the transit of the suns west limb, reversing the telescope and observing simultaneously the altitude of the suns upper limb and the transit of the suns east limb ;

Suns position:

Direct



Reversed



Mean observed altitude :	65° 33' 30"
Reduced latitude :	34° 29' 30"
Mean watch time of observation :	12H. 32m. 05s.
Watch fast of l.m.t. :	33m. 37s.

## RESURVEY OF THE GILA &amp; SALT RIVER MERIDIAN THRU T.13 N.

The north four miles of the G.& S.R. Meridian through T.13 N. were surveyed due South by S.W. Foreman, U.S.D.S. in 1871, establishing  $\frac{1}{4}$  sec. and sec. cors. alternately at intervals of 40.00 chs. with common reference to areas on both sides of the line.

In 1883, J.B. McLaughlin, U.S.D.S., retraced those N. four miles of the G.& S.R. Meridian in T.13 N., reported all the  $\frac{1}{4}$  sec. and sec. cors. missing, reconstructed the cor. of Ts. 13 and 14 N., Rs. 1 E. and 1 W., in its original position and resurveyed such portion of the Meridian due South therefrom, re-establishing all the corners thereon with the original common reference at intervals of 40.00 chs.

In 1883, J.B. McLaughlin, U.S.D.S., surveyed the S. 2 miles of the Meridian in T.13 N. due South from his re-established cor. of secs. 19, 24, 25 and 30, establishing  $\frac{1}{2}$  sec. and sec. cors. with common reference to areas on both sides of the line alternately at intervals of 40.00 chs. with common reference to areas on both sides of the line, to an intersection with the 3rd Std. Par., N., where he established the closing cor. of Ts. 13 N., Rs. 1 E. and 1 W.

In 1925, in connection with the survey and resurvey of T.13 N., R.1 E., I resurveyed the G.& S.R. Meridian thru T.13 N., making a dependent resurvey of the N. 3 miles, re-monumenting all  $\frac{1}{4}$  sec. and sec. cors. in their original positions and changing their reference to areas E. of the line, only, and re-establishing  $\frac{1}{4}$  sec. and sec. cors. on the S. 3 miles by an independent resurvey due South to a new closing cor. on the 3rd Std. par., N.

No other retracements or resurveys are of record.

The following notes describe a resurvey of the Meridian through T.13 N. as the E. bdy. of T.13 N., R.1 W., altering the cors. on the S.  $1\frac{1}{2}$  miles to common reference to areas on both sides of the line, and establishing cors. at intervals of 40.00 chs. Northerly from the  $\frac{1}{4}$  sec. cor. of secs. 25 and 30 for reference to areas in R.1 W., only.

## RETRACEMENT FOR RESURVEY

The G.& S.R. Meridian, through T.13 N., was retraced and the courses and distances of all corner intervals were found to agree with the 1925 record. However, the stations of the topographical features as recorded in the following notes, are changed in occasional detail to conform to the 1925 record. The notes otherwise are a record of the present work.


## RESURVEY

The std. SW. cor. of T.13 N., R.1 E., monumented as a witness cor. at 10 lks. North of true point, is an iron post, 3 ins. diam., projecting 12 ins. above ground, firmly set, and mkd. and witnessed as described in the official record. As this corner monument will now refer to the std. SE. cor. of T.13 N., R.1 W., also, I add markings to brass cap of same, so that it now reads:

SC  
T13N  
R1W | R1E  
S36 | S31

T12 $\frac{1}{2}$ NR1W  
S24  
W C  
1925-33

## RESURVEY OF THE GILA &amp; SALT RIVER MERIDIAN THROUGH T.13 N.

Chains	
	and remove mound of stone from NE. of cor., and raise a mound of stone, 4 ft. base, 2 ft. high, N. of cor.
	Thence, from true point for cor., in wash, course SE., North, on true line, bet. secs. 31 and 36.
	Asc. 4 ft. over S. slope into wash bottom, through scattering timber and dense undergrowth.
0.10	Intersect witness std. cor., hereinbefore described.
	Asc. 70 ft. over S. slope, to end of gradual incline.
1.70	Old railroad grade, bears E. and W. Track removed.
7.10	Power line, bears E. and W.
8.10	Change to steep S. slope; asc. 586 ft.
39.00	Ridge, bears E. and W., about 1 ch. wide and level; desc. 8 ft. over gradual N. slope.
40.00	The $\frac{1}{2}$ sec. cor., of sec. 31, only, which is an iron post, 1 in. diam., projecting 4 ins. above a mound of stone, firmly set, and marked and witnessed as described in the official record. Alter this cor. monument to refer to areas in sec. 36, also, by changing the marks on the brass cap of post to read:
	
	No bearing trees available.
	Desc. 354 ft. over N. slope.
41.53	Intersect the SE. side line (1-2 line) of the REPUBLIC NO.1 patented lode mining claim, mineral survey No.1772, at a point 11.80 chs. S.66°20'W. of its cor. No.2. Over patented mineral land.
50.44	Intersect the NW. side line (3-4 line) of the REPUBLIC NO.1 patented lode mining claim, mineral survey No.1772, at a point 4.20 chs. S.66°20'W. of its cor. No.3. Leave patented mineral land.
68.40	Trail, bears E. and W.; foot of slope; over bottom land.
69.40	Wire fence, bears E. and W.; fence corner bears E., about 2 chs. dist., from which fences extend W. and N.; house bears E., about 5 chs. dist.; enter orchard.
70.10	Wash, 10 lks. wide, course E.
72.10	Wire fence, bears E. and W.; fence corner bears E. about 2 chs. dist.; from corner fences extend W. and S.; leave orchard.
	Asc. 79 ft. over SE. slope.
76.40	Intersect the SW. end line (2-3 line) of the OPPORTUNITY patented lode mining claim, mineral survey No.1499, at a point 1.43 chs. S.52°E. of its cor. No.2. Over patented mineral land.

## RESURVEY OF THE GILA &amp; SALT RIVER MERIDIAN THROUGH T.13 N.

Chains

78.66 Intersect the NW. side line (1-2 line) of the OPPORTUNITY patented lode mining claim, mineral survey No.1499, at a point 1.78 chs. N.39°08'E. of its cor. No.2. Leave patented mineral land.

80.00 Intersect the cor. of secs. 30 and 31, only, which is an iron post, 2 ins. diam., projecting 4 ins. above a mound of stone, firmly set, and mkd. on brass cap as described in the official record. Alter this cor. to refer to secs. 25 and 36, also, by changing the marks on the brass cap to read:

T13N	T13N
R1W	R1E
S25	S30
S36	S31
1925-33	

No suitable bearing trees are available.

Land: mountainous.

Soil: rocky, 4th rate.

Timber: scrub oak, and along larger washes some willow and cottonwood. Undergrowth: oak brush, manzanita and cacti.

-----  
North, on true line, bet. secs. 25 and 30.

Asc. 60 ft. over SE. slope; through thinly scattered timber and dense undergrowth.

Along wire fence, approximately on line.

1.94 Intersect the SE. side line (1-2 line) of the ARROYO patented lode mining claim, mineral survey No.2624, at a point 10.36 chs. N.68°23'E. of its cor. No.1. Over patented mineral land.

2.70 Fence turns to NW.

10.49 A sheet-iron shack, 12 ft. square, on line.

11.70 Ridge, bears E. and W.; the Little Jessie mine bears N. 60°E., about 7 chs. dist.; desc. 195 ft. over N. slope.

12.64 Old road, bears W. and SE.

13.80 Power line, bears NW. and SE.

13.90 Old road, bears W. and SE.

15.42 Intersect the NW. side line (3-4 line) of the LITTLE JESSIE patented lode mining claim, mineral survey No.1125, at a point 4.27 chs. N.52°46'E. of its cor. No.3. Leave patented mineral land.

16.09 Intersect the SE. side line (3-4 line) of the DIVIDEND patented lode mining claim, mineral survey No.74, at a point 8.47 chs. S.71°51'W. of its cor. No.3. Over patented mineral land.

20.30 Bend in old road, from NE. to SE.

25.15 Road, bears E. and W.

26.50 Ticonderoga Gulch, 30 lks. wide, course E.; asc. 167 ft. over S. slope. Continue along wire fence.



## RESURVEY OF THE GILA &amp; SALT RIVER MERIDIAN THROUGH T.13 N.

Chains											
32.20	Telephone line, bears E. and W.										
37.60	Road, bears E. and W.										
37.81	Intersect the NW. side line (1-2 line) of the INDEPENDENCE patented lode mining claim, mineral survey No. 76, at a point 4.17 chs. N. 67° 31' E. of its cor. No. 1. Leave patented mineral land.										
40.00	Intersect the $\frac{1}{2}$ sec. cor. of sec. 30, only, which is an iron post, 1 in. diam., projecting 10 ins. above ground, firmly set and marked on brass cap and witnessed as described in the official record. Alter this cor. monument to refer to sec. 25, also, by changing the marks on the brass cap to read: <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S25</td> <td style="padding: 0 5px;">S30</td> </tr> <tr> <td colspan="2" style="text-align: center;">1925-33</td> </tr> </table> </div> and remove the mound of stone from E. of cor. and raise a mound of stone, 4 ft. base, 2 ft. high, W. of cor. No bearing trees available.	S25	S30	1925-33							
S25	S30										
1925-33											
	Over gentle S. slope.										
40.30	Ridge, bears E. and W.; desc. 207 ft. over N. slope.										
54.30	Wash, 20 lks. wide, course E.; asc. 51 ft. over SE. slope.										
55.20	Old house bears West, about 1 ch. dist.										
57.60	Road to Lelan mine, bears E. and W.; the mine buildings and tunnels lie about 10 chs. westerly.										
60.30	Change to NE. slope; desc. 12 ft.										
61.30	Wash, 20 lks. wide, course SE.; asc. 52 ft. over SE. slope.										
69.30	Intersect the cor. of secs. 19 and 30, only, which is an iron post, 2 ins. diam., projecting 3 ins. above a mound of stone, firmly set, and mkd. on brass cap as described in the official record. I add to the marks on the brass cap so that they now read: <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">T13N</td> <td style="padding: 0 5px;">T13N</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S19</td> <td style="padding: 0 5px;">S19</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">R1W</td> <td style="padding: 0 5px;">S30</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S25</td> <td style="padding: 0 5px;">R1E</td> </tr> <tr> <td colspan="2" style="text-align: center;">1925-33</td> </tr> </table> </div>	T13N	T13N	S19	S19	R1W	S30	S25	R1E	1925-33	
T13N	T13N										
S19	S19										
R1W	S30										
S25	R1E										
1925-33											
	Continue measurement of E. bdy. of sec. 25, on same bearing.										
	Asc. 45 ft. over SE. slope, to cor.										
69.52	Wash, 20 lks. wide, course SE.										
75.42	Wash, 10 lks. wide, course SE.										
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bedrock, with a stone, 6 x 6 x 2 ins., mkd. X, deposited beside, and in a mound of stone to top, for cor. of secs. 24 and 25, only, with brass cap mkd. <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">T13N</td> <td style="padding: 0 5px;">T13N</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S24</td> <td style="padding: 0 5px;">R1E</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S25</td> <td style="padding: 0 5px;">S19</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">R1W</td> <td></td> </tr> <tr> <td colspan="2" style="text-align: center;">1933</td> </tr> </table> </div>	T13N	T13N	S24	R1E	S25	S19	R1W		1933	
T13N	T13N										
S24	R1E										
S25	S19										
R1W											
1933											

## RESURVEY OF THE GILA &amp; SALT RIVER MERIDIAN THROUGH T.13 N.

4065

## Chains

No suitable bearing trees available.

Land mountainous.

Soil: rocky, 4th rate.

Timber: a few oak and some willow and cottonwood along larger washes: Undergrowth: oakbrush, manzanita & cacti.

-----  
North, on true line, on E. bdy. of sec. 24

Over rolling E. slope; through very scattering timber and dense undergrowth.

Along wire fence, approximately on line.

- 1.43 Fence, branches to SW.
- 1.52 Ridge, bears E. and W.; desc. 91 ft. over NW. slope.
- 2.40 Old road, bears NE. and SW.
- 8.65 Old road, bears NE. and SW.
- 9.30 Change to N. slope; desc. 90 ft.
- 13.32 Wash, 20 lks. wide, course NE.; asc. 54 ft. over SE. slope.
- 17.12 Spur, slopes E.; desc. 25 ft. over NE. slope.
- 19.77 Change to SE. slope; asc. 115 ft.
- 29.30 Intersect the  $\frac{1}{4}$  sec. cor. of sec. 19, only, which is an iron post, 1 in. diam., projecting 12 ins. above ground, firmly set, and mkd. on brass cap and witnessed as described in the official record.
- Asc. 14 ft. over SE. slope.
- 29.62 Spur, slopes E.; desc. 67 ft. over NE. slope.
- 38.12 Wash, 15 lks. wide, course SE.; asc. 50 ft. over SW. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, with a stone, 9 x 9 x 3 ins., mkd. X, deposited beside, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor. of sec. 24, only, with brass cap mkd.

S24

1933

No suitable bearing trees available.

Asc. 191 ft. over SW. slope.

- 49.82 Spur, slopes SE.; desc. 107 ft. over NE. slope.
- 56.62 Wash, 20 lks. wide, course SE.; asc. 283 ft. over SE. slope.
- 70.67 Ridge, bears E. and W.; desc. 98 ft. over N. slope.
- 78.32 Intersect the cor. of secs. 18 and 19, only, which is an iron post, 2 ins. diam., projecting 12 ins. above ground, firmly set, witnessed by a mound of stone E. of cor. I add to the marks on the brass cap of post to make them read:

T13N	T13N
R1W	S18
S24	S19
	R1E

1925-33

RESURVEY OF THE GILA & SALT RIVER MERIDIAN THROUGH T.13 N.

Chains													
	Thence												
	N.0°50'E., on true line, continuing measurement of E. bdy. of sec. 24.												
	Desc. 22 ft. over N. slope.												
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 13 and 24, only, with brass cap mkd.												
	<table border="0"> <tr> <td>T13N</td> <td> </td> <td>T13N</td> </tr> <tr> <td>S13</td> <td> </td> <td>R1E</td> </tr> <tr> <td>S24</td> <td> </td> <td>S18</td> </tr> <tr> <td>R1W</td> <td> </td> <td></td> </tr> </table>	T13N		T13N	S13		R1E	S24		S18	R1W		
T13N		T13N											
S13		R1E											
S24		S18											
R1W													
	1933												
	No suitable bearing trees available; raise a mound of stone, 4 ft. base, 2 ft. high, W. of cor.												
	Land: mountainous.												
	Soil: rocky, 4th rate.												
	Timber: oak and juniper.												
	Undergrowth: oak brush, manzanita and cacti.												
-----													
	N.0°50'E., on true line, on E. bdy. of sec. 13.												
	Desc. 92 ft, over N. slope; through thinly scattered timber and dense undergrowth.												
	Along wire fence, approximately on line.												
9.21	Wash, 20 lks. wide, course NE.; asc. 115 ft. over SE. slope.												
15.60	Continue along W. edge of ravine.												
28.05	Continue down center of same wash, 15 lks. wide.												
35.84	Intersect the $\frac{1}{4}$ sec. cor. of sec. 18, only, which is an iron post, 1 in. diam., projecting 9 ins. above ground, firmly set, properly mkd. on brass cap and witnessed by a mound of stone E. of cor.												
39.74	Rocky wash bottom, 10 lks. wide, course NE.; asc. 18 ft. over broken E. slope.												
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 13, only, with brass cap mkd.												
	<table border="0"> <tr> <td><math>\frac{1}{4}</math></td> <td> </td> </tr> <tr> <td>S13</td> <td> </td> </tr> </table>	$\frac{1}{4}$		S13									
$\frac{1}{4}$													
S13													
	1933												
	No suitable bearing trees available; raise a mound of stone, 4 ft. base, 2 ft. high, W. of cor.												
	Asc. 23 ft. over SE. slope.												
44.38	Fence branches to E.												
48.28	Trail, bears NE. and SW.												
49.16	Spur, slopes E.; desc. 55 ft. over N. slope.												
56.56	Wash, 10 lks. wide, course NE.; asc. 51 ft. over SE. slope.												

## RESURVEY OF THE GILA &amp; SALT RIVER MERIDIAN THROUGH T.13 N.

Chains

- 71.16 Spur, slopes NE.; desc. 13 ft. over NW. slope.
- 73.36 Intersect the cor. of secs. 7 and 18, only, which is an iron post, 2 ins. diam., projecting 3 ins. above a mound of stone, firmly set, unwitnessed. I add to the marks on the brass cap of the post to make them read:

T13N	T13N
R1W	S7
S13	S18
	R1E

1925-33

Thence

N.0°49'W., on true line, continuing measurement of E. bdy. of sec. 13.

Desc. 59 ft. over NW. slope.

- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bedrock, with a stone, 6 x 6 x 3 ins., mkd. X, deposited at base, and in a mound of stone to top, for cor. of secs. 12 and 13, only, with brass cap mkd.

T13N	T13N
S12	R1E
S13	S7
R1W	

1933

No suitable bearing trees available.

Land: mountainous.

Soil: rocky, 4th rate.

Timber: oak and juniper.

Undergrowth: oak brush, manzanita and cacti.

N.0°49'W., on true line, on E. bdy. of sec. 12.

Desc. slightly over NW. slope; through scattering timber and undergrowth.

- 0.53 Wash, 10 lks. wide, course NE.; asc. 28 ft. over SE. slope.
- 5.33 Spur, slopes NE.; desc. 15 ft.
- 6.98 Change to SE. slope; asc. 31 ft.
- 11.53 Spur, slopes NE.; desc. 66 ft. over NW. slope.
- 19.03 Wash, 10 lks. wide, course NE.; desc. 34 ft. over NE. slope.
- 22.33 Wash, 20 lks. wide, course NE.; asc. 35 ft. over S. slope.
- 28.73 Low knoll on spur, slopes NE.; desc. 26 ft. over N. slope.
- 33.23 Intersect the  $\frac{1}{4}$  sec. cor. of sec. 7, only, which is an iron post, 1 in. diam., projecting 10 ins. above ground, firmly set and properly mkd. on brass cap and witnessed by a mound of stone E. of cor.

Thence

N.0°59'E., on true line, continuing measurement of E. bdy. of sec. 12.

RESURVEY OF THE GILA AND SALT RIVER MERIDIAN THROUGH T.13 N.

Chains

Desc. 16 ft. over N. slope.

35.50 Telephone line, bears NW. and SE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 17 ins. in the ground to bedrock, with a stone, 7 x 7 x 2 ins., mkd. X, deposited at base, and in a mound of stone to top, for sec. cor. of sec. 12, only, with brass cap mkd.

1/2 |  
S12 |  
1933

No suitable bearing trees available.

Desc. 24 ft. over NE. slope.

44.46 Wash, 10 lks. wide, course SE.; asc. 32 ft. over SE. slope.

55.56 Spur, slopes E.; desc. 70 ft. over N. slope.

64.46 Wash, 10 lks. wide, course E.; asc. 25 ft. over S. slope.

66.96 Spur, slopes E.; desc. 65 ft. over N. slope.

70.16 Wash, 35 lks. wide, course SE.; asc. 42 ft. over SE. slope.  
A well of good water bears about 1 ch. E.

73.26 Intersect the cor. of secs. 6 and 7, only, which is an iron post, 2 ins. diam., projecting 10 ins. above ground, firmly set, and witnessed by 2 bearing trees as described in the official record. I add to the marks on the brass cap of the post to make them read:

T13N  
T13N S6  
R1W S7  
S12 R1E

1925-33

Thence

N. 9°32'E., on true line, continuing measurement of E. bdy. of sec. 12.

Over general SE. slope.

77.47 Wash, 10 lks. wide, course SE.; asc. 25 ft.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bedrock, with a stone 8 x 8 x 3 ins., mkd. X, deposited at base, and in a mound of stone to top, for cor. of secs. 1 and 12, only, with brass cap mkd.

T13N | T13N  
S 1 | R1E  
S12 | S6  
R1W |

1933

No suitable bearing trees available.

Land: mountainous.  
Soil: rocky, 4th rate.  
Timber: oak and juniper.  
Undergrowth: oak brush, manzanita and cacti.

## RESURVEY OF THE GILA &amp; SALT RIVER MERIDIAN THROUGH T.13 N.

Chains	
	N.0°32'E., on true line, on E. bdy. of sec. 1.
	Asc. 45 ft. over SE. slope; through very scattering timber and dense undergrowth.
4.47	Old road, bears N.70°W. and S.70°E.
5.17	Ridge, bears NE. and SW.; over flat top of same.
10.00	Leave same; desc. 50 ft. over NW. slope.
16.87	Wash, 20 lks. wide, course NE.; asc. 89 ft. over SE. slope.
30.07	Ridge, bears N.70°E. and S.70°W.; desc. 25 ft. over N. slope.
33.37	Intersect the sec. cor. of sec. 6, only, which is an iron post, 1 in. diam., projecting 10 ins. above ground, firmly set, properly mkd. on brass cap, and witnessed by a mound of stone E. of cor.
	Thence
	N.0°36'E., on true line, continuing measurement of E. bdy. of sec. 1.
	Desc. 103 ft. over N. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground to bedrock, with a stone, 8 x 8 x 4 ins., mkd. X, deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 1, only, with brass cap mkd.
	S1 1933
	No suitable bearing trees available.
	Desc. 57 ft. over NW. slope.
43.02	Wash, 20 lks. wide, course E.; asc. 47 ft. over S. slope.
48.37	Spur, slopes NE.; desc. 82 ft. over NE. slope.
50.02	Wash, 10 lks. wide, course SE.; asc. 139 ft. over SE. slope.
57.32	Wire fence, bears E. and W.
58.22	Spur, 5 chs. wide, slopes NE.; desc. 61 ft. over N. slope.
65.77	Wash, 10 lks. wide, course E.; asc. 30 ft. over SE. slope.
70.74	Spur, slopes NE.; desc. 21 ft. over NW. slope.
73.02	Intersect the cor. of Tps. 13 and 14 N., Rs. 1 E. and 1 W., which is an iron post, 3 ins. diam., projecting 4 ins. above a mound of stone, firmly set, properly mkd. on brass cap and witnessed as described in the official record.
	Land: mountainous.
	Soil: rocky, 4th rate.
	Timber: oak.
	Undergrowth: oak brush, manzanita and cacti.

## RESURVEY OF 3RD. ST. PAR., N., THROUGH RANGE 1 WEST

Chains.

In 1871 O.H. Case, U.S.D.S., surveyed the W. 3 miles and in 1873 C.B. Foster, U.S.D.S., completed the survey of the 3rd St. Par., N., through R.1 W.

In 1913, S.E. Blout, U.S.S., resurveyed the E.  $\frac{1}{2}$  mile of the parallel in R.1 W., perpetuating the Foster position of that portion of the parallel. No other retracement or resurvey of the parallel through R.1 W. is of record.

The following notes describe an independent resurvey of the parallel through R.1 W., initiating from the std. SW. cor. of T.13 N., R.1 E., which now becomes the std. SE. cor. of T.13 N., R.1 W. also. All original corners found are altered to witness points by reason of approved mineral surveys being tied thereto. Ties to and description of said witness points are hereinafter recorded.

-----  
Beginning at the true point for std. cor. of Ts. 13 N., Rs. 1 E. and 1 W., witnessed 10 lks. North by a 3-in. brass-capped iron post hereinbefore described,

West, on true line, on S. bdy. of sec. 36.

Beginning point is in a wash, 10 lks. wide, course SE.

Asc. 69 ft. over NE. slope; through dense undergrowth.

- 6.10 N. edge of knoll on spur from N.; desc. 72 ft. over SW. slope. Enter scattering timber, bears N. and S.
- 9.20 Head of wash, course SW.; asc. 11 ft.
- 10.55 Spur, slopes S.; desc. 29 ft. over W. slope.
- 15.20 Rocky wash, 25 lks. wide, course S.; over rolling S. slope.
- 20.10 Road, bears NE. and SW.
- 27.40 Road, bears NW. and SE.
- 36.80 Wash, 10 lks. wide, course SE.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, with a stone, 8 x 8 x 3 ins., mkd. X, deposited at base, and in a mound of stone to top, for standard  $\frac{1}{4}$  sec. cor., with brass cap mkd.

SC  
 $\frac{1}{4}$  S36

1933

from which

A juniper, 12 ins. diam., bears N.20°W., 266 lks. dist., mkd. SC  $\frac{1}{4}$  S36 BT.

The original standard  $\frac{1}{4}$  sec. cor. bears N.9°20'E., 5.64 chs. dist. This cor., re-monumented in 1913, is an iron post, 1 in. diam., projecting 12 ins. above ground, firmly set, and mkd. on brass cap and witnessed as described in the official record. I alter this cor. monument to a witness point by changing the marks on the brass cap to read:

WP

1913-33

## RESURVEY 3RD ST. PAR., N., THROUGH R.1 W.

Chains	Desc.
	Desc. 12 ft. over W. slope
40.40	Wash, 10 lks. wide, course S.; asc. 12 ft.
45.30	Spur, slopes S.; desc. 25 ft. over W. slope.
46.35	Wash, 20 lks. wide, course S.; asc. 55 ft. over SE. slope.
69.05	Spur, slopes S.; desc. 56 ft. over SW. slope.
73.90	Rocky wash, 30 lks. wide, course SE.; asc. 22 ft. over E. slope.
77.60	Old road, bears N. and S.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to bedrock, with a stone, 4 x 4 x 2 ins., mkd. X, deposited at base, and in a mound of stone to top, for standard cor. of secs. 35 and 36, with brass cap mkd.
	SC T13NR1W S35   S36 1933 from which
	An oak, 10 ins. diam., bears N.47°E., 23 lks. dist., mkd. SC T13N R1W S36 BT.
	An oak, 8 ins. diam., bears N.46°W., 60 lks. dist., mkd. SC T13N R1W S35 BT.
	Land: mountainous and rolling.
	Soil: rocky, 4th rate.
	Timber: oak, juniper, pinon and walnut.
	Undergrowth: oak brush, manzanita, catclaw and cacti.
-----	
	West, on true line, on S. bdy. of sec. 35.
	Asc. 39 ft. over NE. slope; through scattering timber and dense undergrowth.
4.35	Spur, slopes SE.; desc. 42 ft. over SW. slope.
6.75	Intersect the SE. side line (1-2 line) of the STORM CLOUD patented lode claim, mineral survey No.1874, at a point 3.47 chs. N.28°51'E. of its cor. No.1. Over patented mineral land.
10.60	Eugenie Wash, dry, 50 lks. wide, course SE.; over level bottom land on S. side of wash; leave dense undergrowth, bears NW. and SE.
11.93	Road, bears NW. and SE.
12.80	Leave bottom; asc. 127 ft. over rolling NE. slope; enter dense undergrowth, bears NW. and SE.
17.20	Small spring of good water bears N., 100 lks. dist., on S. edge of Eugenie Wash. Spring dries up in very dry seasons.
29.30	Wash, 10 lks. wide, 12 ft. deep, course NE.
34.04	Old road, bears SE., 2 chs. to old clearing, and NW.



## RESURVEY OF 3RD. ST. PAR., N., through R.1 W.

Chains	
40.00	Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground to bedrock, with a stone, 8 x 8 x 4 ins., mkd. X, deposited at base, and in a mound of stone to top, for standard $\frac{1}{2}$ sec. cor., with brass cap mkd.  SC <u>1 S35</u>  1933  No suitable bearing trees available.  Asc. 47 ft. over NE. slope.
42.90	Spur, slopes N.; desc. 38 ft. over NW. slope.
45.38	Intersect the NW. side line (3-4 line) of the OHIO patented lode claim, mineral survey No. 1773, at a point 2.67 chs. N. 37° 45' E. of its cor. No. 3, which is a stone, 18 x 10 x 6 ins. above ground, mkd. A 4 1773 - 0 3 1773, and witnessed as described in the official record. Leave patented mineral land.
45.65	Wash, 10 lks. wide, course NW.; asc. 365 ft. over NE. slope.
63.35	Spur, slopes NE.; desc. 87 ft. over NW. slope.
68.80	Wash, 10 lks. wide, course NE.; asc. 140 ft. over NW. slope.
74.00	Spur, slopes NE.; desc. 33 ft. over NW. slope.
76.65	Wash, 10 lks. wide, course NE.; asc. 120 ft. over E. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bedrock, with a stone, 5 x 5 x 2 ins., mkd. X, deposited beside, and in a mound of stone to top, for standard cor. of secs, 34 and 35, with brass cap mkd.  SC T13NRIW <u>S34   S35</u>  1933  No suitable bearing trees available.  Land: mountainous. Soil: rocky, 4th rate. Timber: oak, juniper, pinon and walnut. Undergrowth: oak brush, manzanita, catclaw and cacti.
-----	
	West, on true line, on S. bdy. of sec. 34.  Asc. 80 ft. over steep NE. slope; through scattering timber and dense undergrowth.
2.50	Over spur, slopes NE.
3.50	Leave same; desc. 65 ft. over NW. slope.
7.80	Wash, 10 lks. wide, course NE.; asc. 306 ft. over E. slope.
17.70	Spur, slopes NE.; desc. 13 ft. over NW. slope.
23.60	Wash, 10 lks. wide, course NE.; asc. 37 ft. over NE. slope.

## RESURVEY OF 3RD ST. PAR., N., through R.1 W.

1000 2065

## Chains

- 25.40 Spur, slopes N.; desc. 69 ft. over NW. slope.  
 31.30 Wash, 10 lks. wide, course NE.; asc. 77 ft. over NE. slope.  
 35.40 Spur, slopes NE.; desc. 36 ft. over NW. slope.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for standard  $\frac{1}{4}$  sec. cor., with brass cap mkd.

SC  
 $\frac{1}{4}$  S34

1933

from which

A yellow pine, 12 ins. diam., bears N.53°W., 21 lks. dist., mkd. SC  $\frac{1}{4}$  S34 BT.

A yellow pine, 9 ins. diam., bears N.58°E., 6 lks. dist., mkd. SC  $\frac{1}{4}$  S34 BT.

Desc. 17 ft. over N. slope.

- 55.70 Wash, 10 lks. wide, course NE.; asc. 461 ft. over NE. slope.  
 78.90 Divide, bears NW. and SE.; desc. 17 ft. over W. slope.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for standard cor. of secs. 33 and 34, with brass cap mkd.

SC  
 T13N RLW  
 S33 | S34

1933

from which

A yellow pine, 16 ins. diam., bears N.46°E., 187 lks. dist., mkd. SC T13N RLW S34 BT.

An oak, 6 ins. diam., bears N.31°W., 64 lks. dist., mkd. SC T13N RLW S33 BT.

Land: mountainous.

Soil: rocky, 3rd and 4th rates.

Timber: yellow pine, oak and juniper.

Undergrowth: oak brush, manzanita and cacti.

-----  
 West, on true line, on S. bdy. of sec. 33.

Desc. 166 ft. over SW. slope; through heavy pine, oak and juniper timber and dense undergrowth.

- 6.60 Wash, 5 lks. wide, course SW.; over gradual S. slope.  
 17.10 A granite ledge, bears N. and S.; desc. 304 ft. over SW. slope.  
 29.40 Wash, 10 lks. wide, course SW.  
 37.25 Old road, bears NW. and SE.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for standard  $\frac{1}{4}$  sec. cor., with brass cap mkd.

## RESURVEY OF 3RD ST. PAR., N., through R.1 W.

Chains

SC

S33

1933

from which

A yellow pine, 8 ins. diam., bears N.58°E., 12 lks. dist., mkd. SC  $\frac{1}{2}$  S33 BT.

A yellow pine, 7 ins. diam., bears N.5°W., 7 lks. dist., mkd. SC  $\frac{1}{4}$  S33 BT.

Desc. 69 ft. over SW. slope.

- 43.00 Rocky wash, 30 lks. wide, course SW.; continue on gradual descent over S. slope.
- 51.50 Old lime kiln bears S., about 30 lks. dist.
- 53.40 Same wash, course NW.; over gradual N. slope.
- 59.00 Wash, 20 lks. wide, course NW.; asc. 39 ft. over NE. slope.
- 64.30 Spur, slopes N.; desc. 62 ft. over W. slope.
- 67.70 Road, bears NE. and SW. Walker P.O. bears NE., about 4 chs. dist.
- 68.25 Power line, bears NE. and SW.
- 69.00 Lynx Creek, stream 15 lks. wide in channel 100 lks. wide, course NE.; asc. 67 ft. over SE. slope.
- 71.20 Road, bears NE. and SW. School house, bears S. about 1 ch. dist.
- 78.00 House bears 20 lks. N.
- 78.70 Road, bears NE. and SW.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for standard cor. of secs. 32 and 33, with brass cap mkd.

SC

T13N R1W

S32 S33

1933

from which

A yellow pine, 10 ins. diam., bears N.51°E., 35 lks. dist., mkd. SC T13N R1W S33 BT.

A yellow pine, 12 ins. diam., bears N.58°W., 23 lks. dist., mkd. SC T13N R1W S32 BT.

The original standard cor. of secs. 32 and 33, a stone, mkd. and witnessed as described in the official record, bears N.41°16'W., 7.96 chs. dist. Because of mineral surveys tied to this old standard cor., I perpetuate it as a witness point by setting beside it an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground, and in a mound of stone to top, with brass cap mkd.

## Resurvey of 3rd. Std. Par. N., through Range 1 West. EOCK 4065

Chains	<p style="text-align: center;">WP 1933</p>
	<p>Land, mountainous. Soil, rocky 4th. rate. Timber, yellow pine, oak, juniper and willow. Undergrowth, oakbrush, manzanita, cacti and mahogany.</p>
	<p>West, on true line, on S. bdy. of sec. 32.</p> <p>Over mountainous land, through thick timber and scattering undergrowth.</p> <p>Asc. 27 ft. over SE. slope.</p>
4.70	Spur, slopes S. Desc. 15 ft. over SW. slope.
4.72	Intersect the E. side line (1-4 line) of the NEW CENTURY patented lode claim, mineral survey No. 4031, at a point 2.82 chs. N.36°36'E. of its Cor. No. 1, a stone, mkd. and witnessed as described in the official record. Over patented mineral land.
5.90	Wash, 5 lks. wide, course S. Asc. 42 ft. over E. slope.
13.65	Spur, slopes S. Desc. 34 ft. over SW. slope.
19.05	Intersect the SW. end line (2-3 line) of the HILLSIDE patented lode claim, mineral survey No. 4031, at a point 5.33 chs. S.80°00'E. of its cor. No. 3, a stone mkd. and witnessed as described in the official record. Leave patented mineral land.
19.90	Wash, 10 lks. wide, course SE. Asc. 112 ft. over NE. slope.
26.67	Road, bears NW. and SE.
29.00	Intersect the SE. side line (1-2 line) of the PINE MOUNTAIN NORTH patented lode claim, mineral survey No. 2567, at a point 11.12 chs. S.46°04'W., of its cor. No. 1, which is a granite stone, 10x8x6 ins. above ground, marked PMN 1 2567, and witnessed as described in the official record. Over patented mineral land.
30.90	Spur, slopes S. Continue ascent of 54 ft. over SE. slope.
33.20	Wash, 5 lks. wide, course SE.
34.20	A house, bears N. about 5 chs. dist.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, and in a mound of stone to top for Std. $\frac{1}{4}$ sec. cor., with brass cap mkd.
	<p>S 0 <math>\frac{1}{4}</math> S32</p>
	1933
	from which
	A yellow pine, 10 ins. in diam., bears N.47°E., 33 lks. dist. marked $\frac{1}{4}$ S32 BT

## Resurvey of 3rd Std. Par. N., through Range 1 West.

Chains							
	A yellow pine, 8 ins. in diam., bears N.43°W., 7 lks. dist., marked SC $\frac{1}{2}$ S32 BT						
	Asc. 61 ft. over SE. slope.						
47.30	Spur, slopes S.. Desc. 39 ft. over SW. slope.						
48.94	Intersect the NW. side line (3-4 line) of the MORNING STAR patented lode claim, mineral survey No. 3632, at a point 8.17 chs. N.40°41 $\frac{1}{2}$ 'E. of the true point for its cor. No. 3, located from the witness cor., 5 lks. dist. Leave patented mineral land.						
51.25	Wash, 5 lks. wide, course SE. Asc. 212 ft. over SE. slope.						
57.30	Trail, bears N. and SW.						
60.50	Trail, bears NE. and SW.						
68.80	Spur, slopes S. Desc. 75 ft. over SW. slope.						
69.70	Old road, bears N. and S.						
71.66	Trail, bears N. and S.						
72.70	Wash, 10 lks. wide, course SE. Asc. 130 ft. over E. slope.						
75.42	Intersect the E. side line (3-4 line) of the KING PIN lode claim (unpatented), mineral survey No. 2786, at a point 4.47 chs. S.18°00'W. of its cor. No. 4. Over surveyed mineral land.						
80.00	Set an iron post 3 ft. long, 2 ins. in diam., 22 ins. in the ground to bedrock, and in a mound of stone to top for Std. cor. of secs. 31 and 32, with brass cap marked						
	<table border="1" style="margin: auto;"> <tr> <td colspan="2" style="text-align: center;">SC</td> </tr> <tr> <td style="text-align: center;">T13N</td> <td style="text-align: center;">R1W</td> </tr> <tr> <td style="text-align: center;">S31</td> <td style="text-align: center;">S32</td> </tr> </table>	SC		T13N	R1W	S31	S32
SC							
T13N	R1W						
S31	S32						
	1933						
	from which						
	An oak, 7 ins. in diam., bears N.47°E., 24 lks. dist. marked SC T13N R1W S32 BT						
	An oak, 8 ins. in diam., bears N.21°W., 32 lks. dist. marked SC T13N R1W S31 BT						
	Land, mountainous. Soil, rocky 4th. rate. Timber, yellow pine, oak, juniper, and pinion. Undergrowth, oakbrush, manzanita, mahogany and cacti.						
	West, on true line, on S. bdy. of sec. 31.						
	Over mountainous land, through thick timber and dense undergrowth. Across surveyed mineral land.						
	Asc. 52 ft. over SE. slope.						

## Resurvey of 3rd Std. Par., N., through Range 1 West

BOOK 4065

## Chains

- 1.30 Intersect the W. side line (1-2 line) of the KING PIN lode claim, (not patented) mineral survey No. 2786, at a point 7.78 chs. S.2°12'E. of its cor. No.1, which is a granite stone, 15 x 12 x 12 ins. above ground, firmly set, and mkd. and witnessed as described in the official record. Leave surveyed mineral land.
- 1.65 Spur, slopes SE.; asc. 263 ft. over E. slope.
- 6.35 Wash, 10 lks. wide, course SE.
- 15.90 Spur, slopes S.; desc. 41 ft. over SW. slope.
- 19.65 Wash, 10 lks. wide, course S.; asc. 325 ft. over SE. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for std.  $\frac{1}{4}$  sec. cor., with brass cap mkd.

SC  
 $\frac{1}{4}$  S31

1934

from which

An oak, 5 ins. diam., bears N.40°W., 19 lks. dist., marked SC  $\frac{1}{4}$  S31 BT.

An oak, 5 ins. diam., bears N.31 $\frac{1}{4}$ °W., 19 lks. dist., marked SC  $\frac{1}{4}$  S31 BT.

Asc. 81 ft. over E. slope.

- 45.45 Trail, bears N. and S. on divide of ~~Blanch~~ Shaw Mountains; over level top, bears N. and S.
- 45.79 Telephone line, bears N. and S.
- 46.64 Change to NW. slope; desc. 310 ft.
- 49.86 Wire fence, bears NE. and SW.
- 63.51 Intersect the E. bdy. of sec. 36, T.13 N., R.2 W.; at intersection

Set an iron post, 3 ft. long, 3 ins. diam., 14 ins. in the ground to bedrock, and in a mound of stone to top, for std. closing cor. of T.13 N., R.1 W., only, with brass cap mkd.

SC  
 T13N  
 RLW  
 S31  
 CC  
 T13N  
 R2W  
 S36

1933

from which

A fir, 14 ins. diam., bears N.89°E., 18 lks. dist., mkd. SC T13N RLW S31 CC BT.

A yellow pine, 4 ins. diam., bears N.1°E., 10 lks. dist., mkd. CC BT.

From point of intersection the SE. cor. of T.13 N., R.2 W. bears S.3°15'W., 16.56 chs. dist., an iron post, 3 ins. diam., firmly set and marked and witnessed as described in the official record.

Land: mountainous. Soil: rocky, 4th rate.

Timber: yellow pine, oak, juniper and spruce.

Undergrowth: oak brush, manzanita, mahogany and cacti.

## RESURVEY OF WEST BOUNDARY OF T.13 N., R.1 W.

Chains

The East bdy. of T.13 N., R.2 W., was surveyed due South by O.H. Case, U.S.D.S., in 1871, establishing common reference corners thereon at intervals of 40.00 chs. and establishing the std. cor. of Ts. 13 N., Rs. 1 and 2 W. at 480 chs. S. from the cor. of Ts. 13 and 14 N., Rs. 1 and 2 W.

In 1930, under Group 157, I retraced and resurveyed the whole of the line, reconstructing all existing corner monuments and restoring missing corners by proportionate measurements, with reference to areas on the W. side of the line, only.

No other retracement or resurvey of any part of this Tp. bdy. is of record.

The following notes describe the  $\frac{1}{4}$  sec. cors. for T.13 N., R.1 W., which, on the S. 5 miles, are set at mid-latitude bet. the NW. and SW. cors. of the respective secs. The  $\frac{1}{4}$  sec. cor. of sec. 6, only, is set at 40.00 chs. in latitude from the closing cor. of secs. 6 and 7. Closing cors. set on this line are described in the notes of those lines.

Notes of a retracement for resurvey are omitted as the resurveys in both R.2 W. and R.1 W. are under the same Group, 157, and both were executed by myself.

Topography given in the following notes is taken from the record of the resurvey of the E. bdy. of T.13 N., R.2 W., with proper changes in measurement made to agree with the position of the cors. referring to T.13 N., R.1 W.

## RESURVEY

From the std. closing cor. of T.13 N., R.1 W., only; hereinafter described,

N.3°15'E., on true line, through heavy timber and dense undergrowth, on W. bdy. of sec. 31.

Desc. 81 ft. over NW. slope.

7.85 Creek, with small stream of water, course SW.; asc. 300 ft. over rolling S. slope.

10.84 Forest Service trail, bears E. and W.

23.35 Ridge, bears E. and W.; over level stony top.

23.44 Intersect the  $\frac{1}{4}$  sec. cor. of secs. 36, only, which is an iron post, firmly set and marked and witnessed as described in the official record. From cor. the Spruce Mt. lookout tower bears N.76°49'E.

Thence

N.0°54'E., on true line, continuing measurement of W. bdy. of sec. 31.

Desc. 371 ft. over steep N. slope.

35.85 Wash, 10 lks. wide, course NW.; asc. 9 ft. over SW. slope.

37.35 Spur, slopes W.; desc. 101 ft. over N. slope.

40.02 (Mid-point in latitude bet. the NW. and SW. cors. of sec. 31) Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 31, only, with brass cap mkd.

## RESURVEY OF WEST BOUNDARY OF T.13 N., R.1 W.

BOOK 4065

Chains

$$\begin{array}{c} \frac{1}{4} \\ | \\ S31 \\ 1933 \end{array}$$

from which

A fir, 8 ins. diam., bears N.43°E., 20 lks. dist., mkd.  
 $\frac{1}{4}$  S31 BT.

An oak, 5 ins. diam., bears S.6 $\frac{1}{2}$ °E., 20 lks. dist., mkd.  
 $\frac{1}{4}$  S31 BT.

- 41.10 Wash, 20 lks. wide, course W.; asc. 162 ft. over S. slope.
- 42.28 Intersect the S. end line (2-3 line) of the NIL DESPERAN-  
 DUM (unpatented) lode mining claim, mineral survey No.  
 1549, at a point 3.60 chs. S.89°00'E. of its cor. No.2.  
 Over surveyed mineral land.
- 48.95 Ridge, bears E. and W.; desc. 180 ft. over N. slope.
- 57.90 Wash, 10 lks. wide, course NW.; asc. 21 ft. over SW.slope.
- 59.80 Spur, slopes NW.; desc. 52 ft. over N. slope.
- 61.15 Small wash, course NW.; over gradual SW. slope.
- 62.14 Intersect the cor. of secs. 25 and 36, only, which is an  
 iron post, 2 ins. diam., projecting 4 ins. above a mound  
 of stone, firmly set, and mkd. on brass cap and witnessed  
 as described in the official record. I add to the marks  
 on the brass cap so that they now read:

$$\begin{array}{c} T13N \\ \hline S25 \\ \hline S36 \\ R2W \end{array} \begin{array}{c} | \\ T13N \\ R1W \\ S31 \end{array}$$

1930-33

Thence

North, on true line, continuing measurement of W. bdy. of  
 sec. 31.

Asc. 20 ft. over W. slope.

- 62.95 Intersect the N. end line (1-4 line) of the NIL DESPERAN-  
 DUM (unpatented) lode mining claim, mineral survey No.  
 1549, at a point 30 lks. N.89°00'W. of its cor. No.4.  
 Continue over surveyed mineral land.
- 67.15 Change to N. slope; desc. 142 ft.
- 74.55 E. fork of Groom Creek, 6 lks. wide, 4 ins. deep, course  
 NW.; asc. 30 ft. over S. slope.
- 77.95 Spur, slopes W.; desc. 55 ft. over N. slope.
- 78.00 Road, bears E. and W., ending 2 chs. E. A group of small  
 houses on both sides of line.
- 80.00 Point of intersection of line run West bet. secs. 30 and  
 31; closing cor. set at this point hereinafter described.

Land: mountainous.

Soil: rocky, 4th rate.

Timber: yellow pine, oak, juniper, pinon, fir, spruce  
 and aspen. Undergrowth: scrub oak, manzanita, laurel  
 and mahogany.



## RESURVEY OF WEST BOUNDARY OF T.13 N., R.1 W.

## Chains

North, on true line, on W. bdy. of sec. 30.

Over gradual NW. slope; through heavy pine, fir and oak timber and dense undergrowth.

- 0.55 Road, bears NE. and SW.
- 1.55 NE. fork of Groom Creek, 10 lks. wide, 3 ins. deep, course SW.; asc. 182 ft. over SW. slope.
- 6.40 Intersect the SE. side line (4-5 line) of the STULL (unpatented) lode claim, mineral survey No. 1752, at a point 1.79 chs. N. 28° 18' E. of the theoretical point for its cor. No. 5. This intersection is computed from retracements of the N. end line (4-5 line) and the NW. side line (1-5 line) of the GOLD TRAIL claim of the same mineral survey. No evidence of cor. No. 5 of the STULL claim was found. Over patented mineral land.
- 10.85 Spur, slopes W.; desc. 140 ft. over N. slope.
- 18.00 Wash, 5 lks. wide, course SW.; asc. 43 ft. over SE. slope.
- 22.84 Intersect the  $\frac{1}{4}$  sec. cor. of sec. 25, only, which is an iron post, 1 in. diam., projecting 12 ins. above ground, firmly set, properly mkd. on brass cap, and witnessed by two yellow pine bearing trees as described in the official record.
- Thence
- N. 0° 52' E., on true line, continuing measurement of W. bdy. of sec. 30.
- Desc. 23 ft. over NW. slope.
- 24.24 Wash, 5 lks. wide, course SW., from N.; asc. 70 ft. up wash.
- 27.24 Leave wash, course S., from NW.; asc. 98 ft. over S. slope.
- 30.19 Telephone line, bears N. 30° W. and S. 30° E.
- 35.88 Intersect the N. end line (4-5 line) of the GOLD TRAIL patented lode claim, mineral survey No. 1752, at a point 4.11 chs. N. 78° 45' E. of its cor. No. 5. Leave patented mineral land.
- 37.97 Intersect the S. end line (4-1 line) of the CORNUCOPIA patented lode claim, mineral survey No. 1572, at a point 4.55 chs. N. 74° 38' E. of its cor. No. 1. Retracement of this claim failed to locate Cor. No. 4, therefore the S. end line is assumed parallel to the N. end line. Over patented mineral land.
- 38.44 Road, bears NW. to Prescott and SE. to Midnight Test mine.
- 39.94 Power line, bears NW. and SE.
- 40.00 (Mid-point in latitude bet. the SW. and NW. cors. of sec. 30) Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 30, only, with brass cap mkd.

$\frac{1}{4}$   
S30

1933

from which

A pine, 12 ins. diam., bears N. 23 $\frac{1}{2}$ ° E., 13 lks. dist.,

## Chains

mkd.  $\frac{1}{4}$  S30 BT.

A pine, 7 ins. diam., bears S.  $79\frac{1}{2}^{\circ}$  E., 14 lks. dist.,  
mkd.  $\frac{1}{4}$  S30 BT.

- 40.24 Divide, bears E. and W.; desc. 275 ft. over steep N. slope.  
47.94 Wire fence, property of city of Prescott, bears NW. and SE.  
51.09 Change from N. to W. slope.  
58.68 Intersect the cor. of secs. 24 and 25, only, which is an iron post, 2 ins. diam., projecting 12 ins. above ground, firmly set, and mkd. on brass cap and witnessed as described in the official record. I add to the marks on the brass cap so that they now read:

T13N	
S24	T13N
S25	R1W
R2W	S30

1930-33

Thence

N.  $2^{\circ}34'$  W., on true line, continuing measurement of W. bdy. of sec. 30.

Desc. 344 ft. over steep NW. slope.

- 58.94 Intersect the N. end line (2-3 line) of the CORNUCOPIA patented lode claim, mineral survey No. 1572, at a point 79 lks. S.  $74^{\circ}38'$  W. of its cor. No. 3. Leave patented mineral land.  
77.67 Wash, 10 lks. wide, course NE.; asc. 32 ft. over NE. slope.  
80.03 Point of intersection of line run due West bet. secs. 19 and 30; closing cor. set at this point hereinafter described.  
Land: mountainous.  
Soil: rocky, 4th rate.  
Timber: yellow pine, oak, juniper and pinon.  
Undergrowth: scrub oak, manzanita and mahogany.

N.  $2^{\circ}34'$  W., on true line, on W. bdy. of sec. 19.


Asc. slightly over SE. slope; through heavy pine, oak and juniper timber and dense undergrowth.

- 4.65 Spur, slopes NE.; desc. 96 ft. over NW. slope.  
7.65 Wash, 10 lks. wide, course NE.; asc. 23 ft. over SE. slope.  
13.65 Change to E. slope; desc. 14 ft.  
21.10 Intersect the  $\frac{1}{4}$  sec. cor. of sec. 24, only, which is an iron post, 1 in. diam., projecting 12 ins. above ground, firmly set and properly mkd. on brass cap, and witnessed by 2 pine bearing trees as described in the official record.  
Continue on same line and measurement.  
Over E. slope, on level.

RESURVEY OF WEST BOUNDARY OF T.13 N., R.1 W.

Chains

- 21.24 Spur, slopes NE.; desc. 80 ft. over NW. slope.
- 24.54 Wash, 10 lks. wide, course NE.; asc. 99 ft. over SE. slope.
- 29.95 Spur, slopes NE.; desc. 85 ft. over NW. slope.
- 34.40 Wash, 10 lks. wide, course NE.; asc. 38 ft. over S. slope.
- 36.85 Spur, slopes E.; desc. 23 ft. over N. slope.
- 37.85 Wash, 5 lks. wide, course SE.; asc. 16 ft. over S. slope.
- 40.04 (Mid-point in latitude bet. the SW. and NW. cors. of sec. 19) Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 19, only, with brass cap mkd.




from which

An oak, 4 ins. diam., bears N.15°E., 11 lks. dist., mkd.  $\frac{1}{4}$  S19 BT.

An oak, 4 ins. diam., bears S.62°E., 10 lks. dist., mkd.  $\frac{1}{4}$  S19 BT.

Asc. 151 ft. over S. slope.

- 48.85 Ridge, bears E. and W.; desc. 52 ft. over N. slope.
- 51.45 Head of wash, course NE.; desc. 14 ft. along E. slope.
- 63.55 Intersect the cor. of secs. 13 and 24, only, which is an iron post, 2 ins. diam., projecting 3 ins. above a mound of stone, firmly set and mkd. on brass cap and witnessed as described in the official record. I add to the marks on the brass cap so that they now read:



1930-33

Continue on same line and measurement.

Desc. 51 ft. over NW. slope.

- 65.45 Wash, 10 lks. wide, course NE.; asc. 44 ft. over SE. slope.
- 68.75 Spur, slopes E.; desc. 84 ft. over N. slope.
- 72.50 Wash, 10 lks. wide, course SE.; asc. 263 ft. over S. slope.
- 80.07 Point of intersection of line run due West bet. secs. 18 and 19; closing cor. set at this point hereinafter described.

Land: mountainous.  
 Soil: rocky, 4th rate.  
 Timber: yellow pine, oak, juniper and pinon.  
 Undergrowth: oak brush, manzanita and mahogany.

## RESURVEY OF WEST BOUNDARY OF T.13 N., R.1 W.

25  
BOOK 4065

## Chains

- N.2°34'W., on true line, on W. bdy. of sec. 18.
- Continue ascent over S. slope; through heavy pine, oak and juniper timber and dense undergrowth.
- 6.78 Ridge, bears E. and W.; desc. 168 ft. over NW. slope.
- 16.68 Spur, slopes NW.; desc. 120 ft. over NE. slope.
- 25.93 Intersect the  $\frac{1}{4}$  sec. cor. of sec. 13, only, which is an iron post, 1 in. diam., projecting 3 ins. above a mound of stone, firmly set, properly mkd. on brass cap, and witnessed by bearing trees SW. and NW. as described in the official record.
- Continue on same line and measurement.
- 32.98 Wash, 5 lks. wide, course NW.; over gradual SW. slope.
- 33.88 Spur, slopes NW.; desc. 6 ft.
- 35.08 Wash, 10 lks. wide, course NE.; asc. 13 ft.
- 37.13 Spur, slopes E.; desc. 36 ft. over N. slope.
- 38.88 Wash, 10 lks. wide, course NE.; asc. 22 ft. over S. slope.
- 40.00 (Mid-point in latitude bet. the SW. and NW. cors. of sec. 18) Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 18, only, with brass cap mkd.
- $\frac{1}{4}$   
 S18  
 1933
- from which
- An oak, 4 ins. diam., bears S.39°E., 18 lks. dist., mkd.  $\frac{1}{4}$  S18 BT.
- A juniper, 30 ins. diam., bears S.26°E., 39 lks. dist., mkd.  $\frac{1}{4}$  S18 BT.
- Asc. 46 ft. over S. slope.
- 41.98 Spur, slopes E.; desc. 24 ft. over N. slope.
- 47.58 Wash, 10 lks. wide, course E.; asc. 119 ft. over SE. slope.
- 54.38 Ridge, bears NE. and SW.; desc. 204 ft. over N. slope.
- 62.58 Wash, 5 lks. wide, course NE.; over gradual SE. slope.
- 63.38 Spur, slopes E.; desc. 21 ft. over gradual N. slope.
- 64.88 Wash, 5 lks. wide, course SE.; asc. 41 ft. over SE. slope.
- 68.38 Intersect the cor. of secs. 12 and 13, only, which is an iron post, 2 ins. diam., projecting 3 ins. above a mound of stone, firmly set and mkd. on brass cap and witnessed as described in the official record. I add to the marks on the brass cap so that they now read:

## RESURVEY OF WEST BOUNDARY OF T.13 N., R.1 W.

Chains

T13N	
S12	T13N
S13	R1W
R2W	S18

1930-33

Continue on same line and measurement.

73.78 Ridge, bears E. and W.; desc. 126 ft. over NW. slope.

76.68 Wash, 10 lks. wide, course NE.; continue descent.

79.95 Wash, 10 lks. wide, course NE.; asc. slightly.

80.00 Point of intersection of line run due West bet. secs. 7 and 18; closing cor. set at this point hereinafter described.

Land: mountainous.

Soil: rocky, 4th rate.

Timber: yellow pine, oak, juniper and pinon.

Undergrowth: oak brush, manzanita, mahogany and cacti.

-----  
N.2°34'W., on true line, on W. bdy. of sec. 7.

Asc. 28 ft. over SE. slope; through scattering oak, pinon and juniper timber and dense undergrowth.

2.28 Spur, slopes E.; desc. 22 ft. over N. slope.

4.03 Wash, 10 lks. wide, course E.; asc. 61 ft. over S. slope.

8.28 Spur, slopes E.; desc. 34 ft. over N. slope.

11.83 Wash, 10 lks. wide, course E.; asc. 100 ft. over SE. slope.

22.28 Ridge, bears NE. and SW.; desc. 197 ft. over N. slope.

30.83 Intersect the  $\frac{1}{4}$  sec. cor. of sec. 12, only, which is an iron post, 1 in. diam., projecting 3 ins. above a mound of stone, firmly set and properly mkd. on brass cap and witnessed as described in the official record.

Continue on same line and measurement.

32.75 Blazed trail, bears NE. and SW.

32.98 Wash, 10 lks. wide, course NE.; asc. 25 ft. over S. slope.

37.38 Spur, slopes E.; over gradual NE. slope.

39.95 (Mid-point in latitude bet. the SW. and NW. cors. of sec. 7) Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bedrock, with a stone, 7 x 5 x 5 ins., mkd. X; deposited at base, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor. of sec. 7, only, with brass cap mkd.|  $\frac{1}{4}$ 

| S7

1933

No suitable bearing trees available.

## RESURVEY OF WEST BOUNDARY OF T.13 N., R. 1 W.

BOOK 4065

## Chains

Continue on same line and measurement.

Over gradual NE. slope.

40.93 Wash, 10 lks. wide, course SE.; asc. 130 ft. over S. slope.

41.53 Old road, bears NW. and SE.; old mine tunnel, on line.

46.68 Ridge, bears NE. and W.; desc. 112 ft. over NW. slope.

56.88 Wash, 10 lks. wide, course NE.; asc. 19 ft. over S. slope.

59.28 Spur, slopes E.; desc. 43 ft. over N. slope.

64.13 Wash, 10 lks. wide, course E.; asc. 51 ft. over S. slope.

72.38 Ridge, bears E. and W.; desc. 6 ft.

73.28 Intersect the cor. of secs. 1 and 12, only, which is an iron post, 2 ins. diam., projecting 3 ins. above a mound of stone, firmly set, and mkd. on brass cap and witnessed as described in the official record. I add to the marks on the brass cap to make them read:

T13N	
S 1	T13N
S12	R1E
R2W	S7

1930-33

Thence

N.0°22'E., on true line, continuing measurement of W. bdy. of sec. 7.

Over gradual NW. slope.

73.46 Corner of fences, bear N. and W.; desc. 133 ft. over NW. slope.

79.90 Point of intersection of line run due West bet. secs. 6 and 7; closing cor. set at this point hereinafter described.

Land: mountainous.

Soil: rocky, 4th rate.

Timber: pinon, oak and juniper.

Undergrowth: oak brush, manzanita, catclaw and cacti.

N.0°22'E., on true line, on W. bdy. of sec. 6.

Over gradual NW. slope; through scattering oak, juniper and pinon timber and scattering undergrowth.


2.78 Wash, 10 lks. wide, course NE.; asc. 70 ft. over SE. slope.

31.98 Ridge, bears NE. and SW.; over gradual NW. slope.

33.99 Intersect the ~~1~~ sec. cor. of sec. ~~1~~, only, which is an iron post, 1 in. diam., projecting 3 ins. above a mound of stone, firmly set, properly mkd. on brass cap, and witnessed by 2 bearing trees as described in the official record.

Thence

## RESURVEY OF WEST BOUNDARY OF T.13 N., R.1 W.

Chains	N.2°15'W., on true line, continuing measurement of W. bdy. of sec. 6.
	Desc. 40 ft. over N. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground, with a stone, 5 x 5 x 2 ins., mkd. X, deposited at base, and in a mound of stone to top, for $\frac{1}{2}$ sec. cor. of sec. 6, only, with brass cap mkd.
	
	No bearing trees available.
	Cor. stands under wire fence, on line.
52.19	Wash, 10 lks. wide, course E.; asc. 57 ft. over SE. slope.
58.17	Road, bears E. and W.
61.17	Spur, slopes E.; desc. 34 ft. over N. slope.
69.77	Corner of wire fences, bear S. and E.
69.87	Wire fence, bears NE. and W.
70.59	Wash, 10 lks. wide, course NE.; asc. gradual S. slope.
71.97	Telephone line, bears NE. and SW.
73.17	Intersect the cor. of Tps. 13 and 14 N., Rs. 1 and 2 W., which is an iron post, 3 ins. diam., projecting 12 ins. above ground, firmly set, properly mkd. on brass cap, dated 1930, and witnessed by a mound of stone S. of cor.
	Land: mountainous.
	Soil: rocky, 4th rate.
	Timber: oak, pinon and juniper.
	Undergrowth: oak brush, manzanita, mahogany and cacti.

## RESURVEY OF THE SOUTH BOUNDARY OF T.14 N., R.1 W. BOOK 4065

## Chains

The south boundary of T.14 N., R.1 W., was surveyed in 1871 by S.W. Foreman, U.S.D.S., who established corners thereon with common reference to areas on both sides of the line.

In 1925, in connection with the resurvey of T.13 N., R.1 E., I retraced the line bet. secs. 1 and 36 to check the position of the cor. of Tps. 13 and 14 N., Rs. 1 E. and 1 W.

In 1926, Charles E. Hunter, U.S. Transitman, in connection with a Segregation Survey in secs. 20 and 29 of T. 14 N., R.1 W., re-established certain lost corners and reconstructed the cor. of secs. 5, 6, 31 and 32.

No other retracements or resurveys of any part of the line are of record.

The following notes describe a dependent resurvey of the S. bdy. of T.14 N., R.1 W., reconstructing all defective original corners thereon and re-establishing all missing corners at proportionate points, and altering both to refer to areas N. of the line, only. Closing corners of the subdivisional lines of T.13 N., R.1 W., are established at the intersections of those lines and are described in the notes of those lines. In the following notes are described the  $\frac{1}{2}$  sec. cors. on the N. bdy. of T.13 N., R.1 W., which, on the N. bdy. of secs. 1 and 6 are established at 40.00 chs. in departure from the subdivisional closing cors., and on the remainder, at mid-points in departure bet. subdivisional closing cors.

## RETRACEMENT FOR RESURVEY

From the cor. of Ts. 13 and 14 N., Rs. 1 E. and 1 W., West, on random line, on S. bdy. of sec. 36.

40.00 Fail to find  $\frac{1}{2}$  sec. cor. after diligent search; set temp.  $\frac{1}{2}$  sec. cor.

80.64 A point 9 lks. S. of the original cor. of secs. 1, 2, 35 and 36.

True course and dist. of the S. bdy. of sec. 36 are, therefore, S. 89° 56' E., 80.64 chs.

-----  
Thence

West, on random line.

40.00 Fail to find  $\frac{1}{2}$  sec. cor.; set temp.  $\frac{1}{2}$  sec. cor.

80.00 Fail to find cor. of secs. 2, 3, 34 and 35. Set temp. cor.

115.14 A point 20 lks. S. of the original  $\frac{1}{2}$  sec. cor. of secs. 3 and 34.

True course and dist. of each half-mile are, therefore, S. 89° 54' E., 38.38 chs.

Thence

West, on random line, on S. bdy. of sec. 34 (W.  $\frac{1}{2}$ ).

40.00 Fail to find cor. of secs. 3, 4, 33 and 34 after diligent search. Set temp. cor.



## RESURVEY OF THE SOUTH BOUNDARY OF T.14 N., R.1 W.

## Chains

- 80.28 A point 65 lks. N. of the  $\frac{1}{4}$  sec. cor. of secs. 4 and 33.  
True course and dist. of the W. $\frac{1}{2}$  of the S. bdy. of sec. 34 and of the E. $\frac{1}{2}$  of the S. bdy. of sec. 33 are, therefore, N.89°32'E., 40.14 chs. each.  
Thence  
West, on random line, on S. bdy. of sec. 33 (W. $\frac{1}{2}$ ).
- 39.52 A point 44 lks. S. of the original cor. of secs. 4, 5, 32 and 33.  
True course and dist. of the W. $\frac{1}{2}$  of the S. bdy. of sec. 33 are, therefore S.89°22'E., 39.52 chs.  
Thence  
West, on random line, on S. bdy. of sec. 32 (E. $\frac{1}{2}$ ).
- 39.25 A point 8 lks. S. of the original  $\frac{1}{4}$  sec. cor.  
True course and dist. of the E. $\frac{1}{2}$  of the S. bdy. of sec. 32 are, therefore, S.89°53'E., 39.25 chs.  
Thence  
West, on random line, on S. bdy. of sec. 32 (W. $\frac{1}{2}$ ).
- 39.29 A point 10 lks. S. of the cor. of secs. 5, 6, 31 and 32.  
True course and dist. of the W. $\frac{1}{2}$  of the S. bdy. of sec. 32 are, therefore, S.89°51'E., 39.29 chs.  
Thence  
West, on random line, on the S. bdy. of sec. 31 (E. $\frac{1}{2}$ ).
- 40.52 A point 53 lks. S. of the original  $\frac{1}{4}$  sec. cor.  
True course and dist. of the E. $\frac{1}{2}$  of the S. bdy. of sec. 31 are, therefore, S.89°15'E., 40.52 chs.  
Thence  
West, on random line, on S. bdy. of sec. 31 (W. $\frac{1}{2}$ ).
- 39.81 Intersect the cor. of Ts. 13 and 14 N., Rs. 1 and 2 W.  
True course and dist. of the W. $\frac{1}{2}$  of the S. bdy. of sec. 31 are, therefore, East, 39.81 chs.

-----  
RESURVEY

- From the cor. of Ts. 13 and 14 N., Rs. 1 and 2 W., hereinbefore described,  
East, on true line, on S. bdy. of sec. 31 (W. $\frac{1}{2}$ ).  
Desc. 58 ft. over SE. slope; through scattering oak, pinon and juniper timber and dense undergrowth.
- 1.20 Telephone line, bears NE. and SW.  
4.90 Fence, bears NE. and SW.

## RESURVEY OF THE SOUTH BOUNDARY OF T.14 N., R.1 W. BOOK 4065

## Chains

- 10.50 Wash, 5 lks. wide, course NE.; over N. slope.
- 11.10 Fence, bears NE. and SW. (10 lks. SW. to turn to E. and S.)
- 16.40 Road, bears NE, and SW. House, bears N., 30 lks. dist.
- 18.00 House bears N., 30 lks. dist.; change to gradual SE. slope.
- 19.81 Point for cor. No. 2 of Tract 37, hereinafter described.
- 20.20 Wash, 10 lks. wide, course NE.; over gradual NW. slope.
- 32.80 (40.00 chs. in departure from the closing cor. of secs. 5 and 6) Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 6, only, with brass cap mkd.

$$\frac{1}{4} S6$$

1933

No suitable bearing trees available; raise a mound of stone, 4 ft. base, 2 ft. high, S. of cor.

- 35.00 Spur, slopes NE.; over gradual SE. slope.
- 39.81 Intersect the original  $\frac{1}{4}$  sec. cor. of secs. 6 and 31, which has been perpetuated by a local surveyor with an hollow pipe,  $1\frac{1}{2}$  ins. diam., projecting 8 ins. above ground and mound of stone, from which
- The stump of a juniper, 14 ins. diam., bears S.22°W., 68 lks. dist., agreeing with the record for only bearing tree.

Alter this cor. monument to refer as  $\frac{1}{4}$  sec. cor. to areas in sec. 31, only, by, adjoining the hollow pipe

Setting an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 31, only, and for cor. No. 2 of Tract 37, with brass cap mkd.

$$\frac{1}{4} S31$$

COR 2	S6
TR 37	

1933

from which

An oak, 8 ins. diam., bears N.53°E., 50 lks. dist., mkd.  $\frac{1}{4}$  S31 BT (new).

An oak, 8 ins. diam., bears N.53°W., 18 lks. dist., mkd.  $\frac{1}{4}$  S31 BT (new).

Thence

S.89°15'E., on true line, on S. bdy. of sec. 31 (E.  $\frac{1}{2}$ ).

Desc. 75 ft. over SE. slope.

- 10.60 Wash, 10 lks. wide, course NE.; asc. 13 ft. over NW. slope.
- 19.00 Corner of wire fences from E., NE. and SW.

## RESURVEY OF THE SOUTH BOUNDARY OF T.14 N., R.1 W.

Chains	
22.50	Road, at cattle guard, bears N. and S.
24.00	Over rolling top of spur, slopes N.
32.99	Point of intersection of line run N.0°02'W. bet. secs. 5 and 6; closing cor. set at this point hereinafter described.
35.00	Leave top of spur; desc. 52 ft. over NE. slope.
40.52	The original cor. of secs. 5, 6, 31 and 32, which was perpetuated in 1926 with an iron post, 2 ins. diam., projecting 12 ins. above ground, firmly set, properly mkd. on brass cap, and witnessed by 4 bearing trees as described in the official record. Alter this cor. monument to refer to secs. 31 and 32, only, by changing the marks on the brass cap to read:  <div style="text-align: center;"> <p>T14NR1W</p> <p><u>S31</u>   <u>S32</u></p> <p>1926-33</p> </div> and remove the marks on the two bearing trees south of line.  Land: rolling and mountainous. Soil: rocky, 4th rate. Timber: pinon and oak, with a few juniper. Undergrowth: oak brush, manzanita and cacti.
-----	
	S.89°51'E., on true line, on S. bdy. of sec. 32 (W. $\frac{1}{2}$ ).
	Over gradual NE. slope; through scattering oak and pinon timber and dense undergrowth.
4.50	Wash, 5 lks. wide, course NW.; asc. 200 ft. over gradual SW. slope.
32.80	Knoll, on spur, slopes N.; desc. 168 ft. over broken E. slope.
32.57	(Mid-point in departure on the N. bdy. of sec. 5) Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bedrock, with a stone, 6 x 6 x 4 ins., mkd. X, deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 5, only, with brass cap mkd.  <div style="text-align: center;"> <p><u><math>\frac{1}{4}</math> S5</u></p> <p>1933</p> </div> from which  An oak, 12 ins. diam., bears S.68°E., 54 lks. dist., mkd. $\frac{1}{4}$ S5 BT.  No other suitable bearing trees available.
39.29	The original $\frac{1}{4}$ sec. cor., which is a stone, 16 x 8 x 3 ins. above ground, firmly set, mkd. $\frac{1}{4}$ on N. face. To alter this $\frac{1}{4}$ sec. cor. to refer to areas in sec. 32, only, beside the stone  Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bedrock, with a stone, 8 x 8 x 3 ins., mkd. X, deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 32, only, with brass cap mkd.

RESURVEY OF SOUTH BOUNDARY OF T.14 N., R.1 W.

Chains	<p style="text-align: center;"><u>1/4 S32</u> 1933</p> <p style="text-align: right;">from which</p> <p>A house bears S.43°E., about 15 chs. dist. No suitable bearing trees available.</p> <p>Thence S.89°53'E., on true line, on S. bdy. of sec. 32 (E.1/2). Desc. 130 ft. over SE. slope.</p> <p>9.60 Wash, 5 lks. wide, course SE.; asc. 9 ft.</p> <p>14.60 Change to E. slope; desc. 174 ft.</p> <p>25.03 Intersect the NW. side line (3-4 line) of the HOME PLACER patented placer claim, mineral survey No.1861, at a point 3.60 chs. S.22°00'W. of its cor. No.4. Over patented mineral land.</p> <p>25.90 Low spur, slopes S.; road on spur bears N. and S. (at cattle guard); desc. 30 ft. over broken E. slope.</p> <p>27.00 Lynx Creek, 15 lks. wide, 4 ins. deep, course NE.; over bottom of wash of same.</p> <p>28.50 Leave bottom; asc. 80 ft. over NW. slope.</p> <p>32.28 Intersect the SE. side line (1-2 line) of the HOME PLACER patented placer claim, mineral survey No.1861, at a point 3.40 chs. S.18°21'W. of its cor. No.1. Leave patented mineral land.</p> <p>33.80 Point of intersection of line run N.0°02'W. bet. secs. 4 and 5; closing cor. set at this point hereinafter described.</p> <p>39.25 Intersect the original cor. of secs. 4,5,32 and 33, which is a stone, 12 x 8 x 6 ins. above ground, loosely set, dimly grooved on proper faces, from which</p> <p style="padding-left: 20px;">A pinon, 18 ins. diam., bears S.28°W., 26 lks. dist., mkd. TXIIIN R1W SV BT. (destroy marks)</p> <p style="padding-left: 20px;">An oak, 8 ins. diam., bears S.38°E., 35 lks. dist., marked illegibly. (destroy marks).</p> <p>Reconstruct this cor. monument and alter its reference by, beside the mkd. stone, setting an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 32 and 33, only, with brass cap mkd.</p> <p style="text-align: center;">T14N R1W <u>S32   S33</u> S4 T13NR1W 1933</p> <p style="text-align: right;">from which</p> <p>An oak, 10 ins. diam., bears N.76°E., 70 lks. dist., mkd. T14N R1W S33 BT.</p>
--------	---

*Should be 33.28*

## RESURVEY OF SOUTH BOUNDARY OF T.14 N., R.1 W.

Chains	
	<p>An oak, 8 ins. diam., bears N.30°W., 65 lks. dist., mkd. T14N RLW S32 BT.</p> <p>Land: mountainous. Soil: rocky, 4th rate. Timber: pinon, oak and juniper. Undergrowth: oak brush, manzanita and mahogany.</p>
	-----
	<p>S.89°22'E., on true line, on S. bdy. of sec. 33 (W. <math>\frac{1}{4}</math>).</p> <p>Desc. 40 ft. over NE. slope; through scattering oak, pinon and juniper timber and dense undergrowth.</p>
2.75	Wash, 10 lks. wide, course N. from SE.; asc. 230 ft. over rolling NW. slope.
34.07	<p>(Mid-point in departure on the N. bdy. of sec. 4) Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bedrock, with a stone, 7 x 7 x 4 ins., mkd. X, deposited at base, and in a mound of stone to top, for <math>\frac{1}{4}</math> sec. cor. of sec. 4, only, with brass cap mkd.</p> <p style="text-align: center;"><u>1/4 S4</u> 1933</p> <p>No suitable bearing trees available.</p>
34.50	Spur, slopes N.; desc. 41 ft. over NE. slope.
36.00	Saddle on spur, slopes SW.; desc. gradual E. slope.
39.52	<p>Intersect the original <math>\frac{1}{4}</math> sec. cor., which is a stone, 10 x 6 x 4 ins. above ground, firmly set and mkd. and witnessed as described in the official record.</p> <p>Reconstruct this cor. monument and alter its reference by, beside the marked stone, setting an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bedrock, with a stone, 7 x 7 x 4 ins., mkd. X, deposited at base, and in a mound of stone to top, for <math>\frac{1}{4}</math> sec. cor. of sec. 33, only, with brass cap mkd.</p> <p style="text-align: center;"><u>1/4 S33</u> 1933</p> <p>No suitable bearing trees available.</p>
	Thence
	<p>N.89°32'E., on true line, on S. bdy. of sec. 33 (E. <math>\frac{1}{8}</math>).</p> <p>Asc. 119 ft. over SW. slope.</p>
9.90	Spur, slopes S.; desc. 102 ft. over SE. slope.
24.75	Wash, 10 lks. wide, course SW.; asc. 22 ft. over NW. slope.
34.49	Point of intersection of line run N.0°01'W. bet. secs. 3 and 4; closing cor. set at this point hereinafter described.
40.14	(Proportionate point) Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to bedrock, with a stone,

Chains

8 x 8 x 4 ins., mkd. X, deposited at base, and in a mound of stone to top, for re-established cor. of secs. 33 and 34, only, with brass cap mkd.

T14N RLW

S33 | S34

1933

No suitable bearing trees available.

Land: mountainous.

Soil: rocky, 4th rate.

Timber: oak, juniper and pinon.

Undergrowth: oak brush, manzanita and cacti.

N.89°32'E., on true line, on S. bdy. of sec. 34 (W.½).

Over gradual SE. slope; through scattering oak, juniper and pinon timber and dense undergrowth.

- 2.40 Wire fence, bears N. and S.
- 2.50 Wash, 8 lks. wide, course SW.; over gradual NW. slope.
- 14.20 Ridge, bears NW. and SE.; desc. 96 ft. over gradual NE. slope.
- 22.95 Wash, 15 lks. wide, 10 ft. deep, course N.; over gentle N. slope.
- 29.10 Wash, 6 lks. wide, 3 ft. deep, course NE.
- 34.36 Wash, 6 lks. wide, 2 ft. deep, course NW.
- 34.57 (Mid-point in departure on the N. bdy. of sec. 3) Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor. of sec. 3, only, with brass cap mkd.

¼ S3  
1933

from which

A pinon, 8 ins. diam., bears S.66°E., 472 lks. dist., mkd. ¼ S3 BT.

A walnut, 14 ins. diam., bears S.36½°W., 420 lks. dist., mkd. ¼ S3 BT.

- 37.76 Wash, 10 lks. wide, 5 ft. deep, course N.; old road, bears N. and S.; asc. 25 ft. over W. slope.
- 40.14 Intersect the original ¼ sec. cor., which is a stone, 12 x 8 x 8 ins. above ground, set in a mound of stone, mkd. and witnessed as described in the official record.

Reconstruct this cor. monument and alter its reference by, beside the mkd. stone, setting an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for ¼ sec. cor. of sec. 34, only, with brass cap mkd.

¼ S34

1933

## RESURVEY OF THE SOUTH BOUNDARY OF T.14 N., R.1 W.

## Chains

No suitable bearing trees available; raise a mound of stone, 4 ft. base, 2 ft. high, N. of cor.

Thence

S.89°54'E., on true line, on S. bdy. of sec. 34 (E.½).

Asc. 26 ft. over W. slope.

2.25 Spur, slopes N.; knoll on same, 3 chs. by 5 chs., on line; desc. gradual E. slope.

11.00 Change to steeper NE. slope; desc. 107 ft.

24.21 Intersect the SW. side line (3-4 line) of the IRONSIDES patented lode claim, mineral survey No.2428, at a point 8.87 chs. N.29¼°W. of its cor. No.3. Over patented mineral land.

25.20 Wash, 10 lks. wide, course NE.; over top of spur from S.

27.60 Wash, 10 lks. wide, course N.; asc. 175 ft. over NW.slope.

34.65 Point of intersection of line run N.0°01'W. bet. secs. 2 and 3; closing cor. set at this point hereinafter described. At this point, also

Intersect the NE. side line (1-2 line) of the IRONSIDES patented lode claim, mineral survey No.2428, at a point 3.73 chs. N.29°30'W. of its cor. No.2. Leave patented mineral land.

36.70 Spur, slopes N.; desc. 19 ft. over NE. slope.

38.38 (Proportionate point) Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for re-established cor. of secs. 34 and 35, only, with brass cap mkd.

T14N R1W

S34 | S35

1933

No suitable bearing trees available; raise a mound of stone, 4 ft. base, 2 ft. high, N. of cor.

Land: mountainous.

Soil: rocky, 4th rate.

Timber: pinon, juniper, oak and pine.

Undergrowth: oak brush, manzanita and cacti.

S.89°54'E., on true line, on S. bdy. of sec. 35.

Asc. 312 ft. over NW. slope; through scattering juniper and pinon timber and dense undergrowth.

16.30 Ridge, bears N. and S.; desc. 35 ft. over NE. slope.

20.50 Rocky wash, 10 lks. wide, course N.; asc. gradual NW.slope.

20.54 Intersect the NW. side line (1-2 line) of the RED TOP patented lode claim, mineral survey No.3593, at a point 7.20 chs. N.17°33'E. of its cor. No.1. Over patented mineral land.

## RESURVEY OF THE SOUTH BOUNDARY OF T.14 N., R.1 W.

37

BOOK 4065

## Chains

- 22.90 Rocky knoll, on spur, slopes NE.; desc. 373 ft. over NE. slope.
- 30.09 Intersect the SE. side line (3-4 line) of the RED TOP patented lode claim, mineral survey No. 3593, at a point 9.43 chs. N.17°40'E. of its cor. No.4. Leave patented mineral land.
- 36.21 (Mid-point in departure on the N. bdy. of sec. 2) Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bedrock, with a stone, 4 x 4 x 4 ins., mkd. X, deposited at base, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor. of sec. 2, only, with brass cap mkd.

 $\frac{1}{4}$  S2

1933

No suitable bearing trees available.

Desc. 45 ft. over NE. slope.

- 38.38 (Proportionate point) Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bedrock, with a stone, 8 x 8 x 4 ins., mkd. X, deposited at base, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor. re-established for sec. 35, only, with brass cap mkd.

 $\frac{1}{4}$  S35

1933

No suitable bearing trees available.

Desc. 15 ft. over E. slope.

- 39.80 Wash, 10 lks. wide, course NE.; asc. 6 ft.
- 41.15 Spur, slopes NE.; desc. 23 ft. over E. slope.
- 43.95 Wash, 10 lks. wide, course NE.; asc. 166 ft. over NW.slope.
- 56.60 Spur, slopes NE.; desc. 225 ft. over SE. slope.
- 72.15 Wash, 10 lks. wide, course NE., heads about 8 chs. SW.; asc. gradual NW. slope.
- 75.11 Road, bears N. and S.
- 76.15 Point of intersection of line run North bet. secs. 1 and 2; closing cor. set at this point hereinafter described.
- 76.76 Intersect the original cor. of secs. 1,2,35 and 36, which is a stone, 12 x 8 x 6 ins. above ground, firmly set and mkd. and witnessed as described in the official record.

Reconstruct this cor. monument and alter its reference by, beside the mkd. stone, setting an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground to bedrock, with a stone, 6 x 6 x 3 ins., mkd. X, deposited at base, and in a mound of stone to top, for cor. of secs. 35 and 36, only, with brass cap mkd.



## RESURVEY OF THE SOUTH BOUNDARY OF T.14 N., R.1 W.

Chains

T14N R1W

S35 | S36

S1

T13NR1W

1933.

No suitable bearing trees available.

Land: mountainous.

Soil: rocky, 4th rate.

Timber: pinon and juniper.

Undergrowth: oak brush, manzanita and cacti.

S.89°56'E., on true line, on S. bdy. of sec. 36.

Over level top of spur, slopes NE.; through scattering juniper and pinon timber and dense undergrowth.

- 1.00 Leave spur; desc. 130 ft. over SE. slope.
- 9.50 Wire fence, bears N. and S.
- 18.34 Wash, 10 lks. wide, course NE.; continue gradual descent.
- 21.60 Small ravine, course NE.; asc. 34 ft. over W. slope.
- 23.90 Telephone line, bears N. and S.
- 28.15 Spur, slopes NE.; desc. gradual SE. slope.
- 32.07 Old road, bears N. and S.
- 39.39 (40.00 chs. in departure from the closing cor. of secs. 1 and 2) Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor. of sec. 1, only, with brass cap mkd.
- $\frac{1}{4}$  S1  
1933
- No suitable bearing trees available; raise a mound of stone, 4 ft. base, 2 ft. high, S. of cor.
- 40.32 (Proportionate point) Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for re-established  $\frac{1}{4}$  sec. cor. of sec. 36, only, with brass cap mkd.
- $\frac{1}{4}$  S36  
1933
- No suitable bearing trees available; raise a mound of stone, 4 ft. base, 2 ft. high, N. of cor.
- Desc. 37 ft. over NE. slope.
- 52.30 Wash, 10 lks. wide, course N.; asc. 78 ft. over rolling NW. slope.
- 80.64 Intersect the cor. of Ts. 13 and 14 N., Rs. 1 E. and 1 W., hereinbefore described.

## Resurvey and survey of the Subdivision Lines of T.13 N., R.1 W.

## Chains

In 1871, O.H. Case, U.S.D.S., surveyed the  $W\frac{1}{2}$  of T.13 N., R.1 W. No retracements or resurveys are of record.

The following notes describe an independent resurvey of the  $W\frac{1}{2}$  and survey of the  $E\frac{1}{2}$  of T.13 N., R.1 W.

~~The East bdy. of the Tp. (Gila and Salt River Meridian), being defective in alignment, the first meridional sections line is surveyed as a Guide Meridian.~~

From Sta. cor. of secs. 35 and 36, on S. bdy. of Tp., hereinafter described.

North, on true line, on Sectional Guide Meridian, bet. secs. 35 and 36.

Over mountainous land, through scattering timber and dense undergrowth.

Asc. 44 ft. over S. slope.

4.75 Spur, slopes SE. Continue gradual ascent up same.

6.00 Telephone line, bears E. and W.

7.00 Power line, bears E. and W.

7.20 Leave spur, desc. 20 ft. over NE slope.

8.50 Old road, bears N.20°W. and S.20°E.

9.00 Wash, 20 lks. wide, course SE. Thence along E. edge of same, ascending gradually.

10.00 Asc. 126 ft. over SW slope.

12.25 Intersect the SE side line (1-2) of the "Stormcloud" pat. lode mining claim, M.S.No. 1874, at 4.41 chs. S.28°51'W. of Cor. No.2 thereof. Across patented mineral land.

17.20 Intersect the NE end line (2-3) of the "Stormcloud" patented claim, at 2.39 chs. N.62°53'W. of Cor. No. 2, thereof. Leave patented mineral land.

22.10 Across bottom of old mine dump.

22.60 Old shaft, bears E. 1 ch. dist. Desc. gradually over NW slope.

30.70 Same wash, 20 lks. wide, course SW. Thence along W. edge of same, on slight ascent.

32.00 Leave wash, ascend 58 ft. over SE slope.

39.20 Wash, 10 lks. wide, course SE.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 28 ins. in the ground for  $\frac{1}{4}$  sec. cor., with brass cap marked

S35 | S36

1933

from which,

An oak, 6 ins. in diam., bears S.77°E., 15 lks. dist., marked  $\frac{1}{4}$  S36 BT

An oak, 15 ins. in diam., bears West, 27 lks. dist., marked  $\frac{1}{4}$  S35 BT

## Resurvey and survey of Subdivision Lines of T. 13 N., R. 1 W.

Chains							
	Asc. 65 ft. over SW slope.						
44.86	Intersect the SE side line (1-2) of the "Custer" patented mining claim, M.S. No. 1863, at 6.45 chs. S.24°45'W. of Cor. No. 2 thereof. Across patented mineral land.						
46.90	Wash, 10 lks. wide, 5 ft. deep, course SW. Asc. 237 ft. over S. slope.						
50.20	Old road, abears NE and SW.						
53.17	Intersect the NE end line (2-3) of the "Custer" patented mineral claim, M.S. No. 1863, at 3.65 chs. N.47°45'W. of Cor. No. 2 thereof. Leave patented mineral land.						
53.55	Old road, bears NW and SE.						
57.87	Intersect the SW end line (1-4) of patented lode claim "Juanita" M.S. No. 1964 at 3.36 chs. S.60°E. of Cor. No. 4 thereof. Across patented mineral land.						
60.00	Old road, bears NE and SW.						
65.41	Intersect the NW side line (3-4) of the "Juanita" patented claim, at 6.54 chs. N.26°24'E. of Cor. No. 4 thereof. Leave patented mineral land.						
66.10	Ridge, bears NW and SE. Asc. 53 ft. over rolling E. slope.						
78.70	Trail, bears E. and W. on spur, bears E. Desc. slight NE slope.						
80.00	Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for the cor. of secs. 25, 26, 35, and 36, with brass cap marked						
	<table border="1"> <tr><td colspan="2">T13NR1W</td></tr> <tr><td>S26</td><td>S25</td></tr> <tr><td>S35</td><td>S36</td></tr> </table>	T13NR1W		S26	S25	S35	S36
T13NR1W							
S26	S25						
S35	S36						
	1933						
	No suitable bearing trees available; raise a mound of stone 4 ft. base, 2 ft. high W. of cor.						
	Land, mountainous. Soil, rocky 4th. rate. Timber, oak, pinion, and juniper. Undergrowth, oakbrush, manzanita, and cacti.						
	East, on a random line, bet. secs. 25 and 36.						
40.00	Set temp. $\frac{1}{4}$ sec. cor.						
79.82	Intersect E. bdy. of Tp., at 9 lks. S. of the cor. of secs. 25, 30, 31, and 36.						
	Thence, S.89°56'W., on true line, bet. secs. 25 and 36.						
	Over mountainous land, through scattering timber and dense undergrowth.						
	Asc. 135 ft. over SE slope.						
4.89	Intersect the SE side line (1-2) of the "Arroyo" patented						

Resurvey and survey of the Subdivision Lines of T.13 N., R.1 W.

Chains

lode mining claim, U.S. No. 2624 at 5.10 chs., N. 68° 23' E. of Cor. No. 1 thereof. Across patented mineral land.

9.25 Knoll on spur from NW. Desc. 95 ft. over SW slope.

15.25 Wash, near head, course S. Thence along gradually ascending SE slope.

20.98 Spur, slopes S. Intersect the NW side line (1-4) of the "Tippecanoe" pat. lode mining claim, U.S. No. 2726, at 4.11 chs. N. 60° E. of Cor. No. 4. Leave patented mineral land. Desc. gradually 46 ft. over SW slope.

27.98 Intersect the SE side line (1-4) of the "Comstock" pat. lode mining claim, U.S. No. 1949, at 1.34 chs. S. 61° 35' W., of Cor. No. 4 thereof. Across patented mineral land.

38.90 Wash, 10 lks. wide, course SE from W. Continue up same on slight ascent.

39.50 Leave wash, asc. gradual NE slope.

39.91 Set an iron post 3 ft. long, 1 in. in diam., on bedrock, with stone 6x6x3 ins. marked with a cross, deposited at base, and in a mound of stone to top for  $\frac{1}{2}$  sec. cor. with brass cap marked

$\frac{1}{4}$  S25  
S36  
1933

No suitable bearing trees available.

Asc. 65 ft. over NE slope, along S. edge of wash.

47.00 Mining camp consisting of buildings, hoists etc. bears N. about 6 chs. dist.

52.65 Trail, bears NW. and SE..

57.60 Leave wash, 30 lks. wide, from SW.

Asc. 212 ft. over SE slope.

58.64 Road, bears NE and SW.

70.99 Intersect the NW side line of the "Lelan Extension" pat. lode mining claim, Min. Sur. No. 3988, at 3.18 chs. N. 38° 27' E. of Cor. No. 2 thereof. Leave patented mineral land.

79.82 The cor. of secs. 25, 26, 35, and 36.



Land, mountainous.  
Soil, rocky 4th. rate.  
Timber, oak, pinion, and juniper.  
Undergrowth, oakbrush, manzanita, and cacti.

North, on Sectional Guide Meridian, bet. secs. 25 and 26.

Over mountainous land, through scattering timber and dense undergrowth.

Desc. 82 ft. over NE slope.

## Resurvey and survey of Subdivision Lines of T. 13 N., R. 1 W.

Chains	
3.10	Wash, 10 lks. wide, course NE. At this point a developed spring bears NE, in wash, about 2 chs. dist.  Asc. 510 ft. over SE slope.
23.60	Spur, slopes E. Desc. 304 ft. over NE slope.
26.60	Trail, bears E. and W.
28.86	Wire fence, bears NE and SW.
31.00	Wash, 10 lks. wide, course NE. Asc. 142 ft. over SE slope.
40.00	Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 8x8x4 ins. marked X deposited at base, and in a mound of stone to top for sec. cor., with brass cap marked  <div style="text-align: center;">  <p>S26   S25 1933</p> </div> No suitable bearing trees available. Asc. gradual SE slope.
41.00	Spur, slopes NE. Desc. 406 ft. over NE slope.
50.58	Top of vertical bluff 75 ft. high, bears E. and W. Desc. 75 ft. over wall.
51.00	Foot of bluff; continue descent.
53.80	Wash in bottom of canyon, 60 lks. wide, course E. Asc. 555 ft. over S. slope.
70.55	Old road, bears E. and W.
75.60	Spur, slopes SE. Desc. 98 ft. over NE slope:
80.00	Set an iron post 3 ft. long, 2 ins. in diam., 27 ins. in the ground for cor. of secs. 23, 24, 25, and 26, with brass cap marked  <div style="text-align: center;">  <p>T13NR1W S23   S24 S26   S25 1933</p> </div> No suitable bearing trees available; raise a mound of stone 3 ft. base, 1½ ft. high W. of cor.  Land, mountainous. Soil, rocky 4th. rate. Timber, oak, pinion, juniper, and walnut. Undergrowth, oakbrush, manzanita, and cacti.


## Resurvey and survey of Subdivision Lines of T.13 N., R.1 W.

Chains	N. 89°56'E., on a random line, bet. secs. 24 and 25.
40.00	Set temp. sec. cor.
79.64	Intersect E. bdy. of Tp. at 5 lks. S. of the cor. of secs. 24 and 25, hereinbefore described.
	Thence,
	S. 89°54'W., on true line, bet. secs. 24 and 25.
	Over mountainous land, through scattering timber and undergrowth.
	Asc. 50 ft. over broken SE slope.
1.60	Wire fence, bears NE and SW.
9.80	Old road, bears NE and SW., on spur, slopes NE.
21.40	Wash, 20 lks. wide, course NE. Asc. 224 ft. over E. slope.
29.80	Spur, slopes NE. Continue ascent over NE slope.
39.82	Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 8x8x3 ins. marked X deposited at base, and in a mound of stone to top for sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S24}{S25}$
	1933
	No suitable bearing trees available.
	Desc. 53 ft. over NW slope.
48.00	Wash, 10 lks. wide, course NE. Asc. 254 ft. over NE slope.
52.34	Trail, bears N. and S.
58.40	Spur, slopes NE. Desc. 21 ft. over NW slope.
67.30	Wash, 20 lks. wide, course NE. Asc. 319 ft. over NE slope.
79.64	The cor. of secs. 23, 24, 25, and 26.
	Land, mountainous. Soil, rocky 4th. rate. Timber, pinion, oak, and juniper. Undergrowth, oakbrush, manzanita, and cacti.
	North, on Sectional Guide Meridian, bet. secs. 23 and 24.
	Over mountainous land, through scattering timber and dense undergrowth.
	Desc. slightly along E. slope.
4.80	Spur, slopes E. Desc. 228 ft. over NE slope.
14.30	Wash, 20 lks. wide, course E. Asc. 63 ft. over SE slope.

Resurvey and survey of Subdivision Lines of T. 13 N., R. 1 W.

Chains


- 19.30 Spur, slopes SE. Desc. 66 ft. over NE slope.
- 26.00 Wash, 20 lks. wide, course SE. Asc. 418 ft. over SW slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 4 ins. in the ground to bedrock, with cross in face of rock in place 12" x 12" x 8 ins. above ground and 1 lk. W. of cor. point, and in mound of stone to top for  $\frac{1}{4}$  sec. cor. with brass cap marked



No suitable bearing trees available.

Continue ascent of 164 ft. over SE slope.

- 48.00 Spur, slopes E. Desc. 231 ft. over NE slope.
- 53.66 Trail, bears SE and NW.
- 55.95 Head of wash, course E. Asc. 108 ft. over SE slope.
- 72.15 Spur, slopes SE. Desc. 188 ft. over NE slope.
- 79.15 Wash, 10 lks. wide, course E. Asc. 20 ft. over SE slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 22 ins. in the ground to bedrock, with a stone 8x8x4 ins. marked with a cross deposited at base, and in a mound of stone to top, for cor. of secs. 13, 14, 23, and 24, with brass cap marked



from which,

A juniper, 4 ins. in diam., bears N.74°W., 55 lks. dist., marked BT

An oak, 20 ins. in diam., bears S.58°W., 104 lks. dist., marked T13N R1W S23 BT

No other bearing trees available.

Land, mountainous.  
 Soil, rocky 4th. rate.  
 Timber, pinion, oak, and juniper.  
 Undergrowth, oakbrush, manzanita, and cacti.

N.89°54'E., on a random line, bet. secs. 13 and 24.

- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
- 79.58 Intersect E. bdy. of Tp., at 23 lks. N. of the cor. of secs. 13 and 24, hereinbefore described.

Thence,

## Resurvey and survey of Subdivision Lines of T.13 N., R.1 W.

## Chains

N.89°56'W., on true line, bet. secs. 13 and 24.

Over mountainous land, through scattering timber and dense undergrowth.

Desc. 34 ft. over NW. slope.

1.90 Wash, 10 lks. wide, course NE. Asc. 269 ft. over SE. slope.

14.50 Spur, slopes NE. Desc. 266 ft. over NW. slope.

26.35 Wash, 20 lks. wide, course NE. Asc. 13 ft. up same.

30.10 Leave wash, from SW. Asc. 96 ft. over SE. slope.

39.79 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 8x8x3 ins. marked with a cross, deposited at base, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   $\frac{S13}{S24}$

1933

No suitable bearing trees available.

Continue ascent of 357 ft. over SE. slope.

60.15 Spur, slopes S. Asc. 35 ft. along S. slope.

71.65 Wash, 10 lks. wide, course SE. Asc. 84 ft. over NE. slope.

74.25 Same wash, course NE. Asc. 88 ft. over SE. slope along N. edge of same wash.

79.58 The cor. of secs. 13, 14, 23; and 24.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, oak, juniper, and pinion.

Undergrowth, oakbrush, manzanita, and cacti.

North, on Sectional Guide Meridian, bet. secs. 13 and 14.

Over mountainous land, through scattering timber and dense undergrowth.

Asc. 117 ft. over SE. slope.

6.45 Spur, slopes NE. Desc. 239 ft. over NW. slope.

21.55 Wash, 10 lks. wide, course W. Asc. 21 ft. over SW. slope.

26.70 Spur, slopes NW. Desc. 182 ft. over NW. slope.


34.50 Wash, 10 lks. wide, course NW. Asc. 12 ft. over SW. slope.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for  $\frac{1}{4}$  sec. cor., with brass cap marked



Resurvey and survey of Subdivision Lines of T. 13 N., R. 1 W.

Chains



No suitable bearing trees available; raise a mound of stone 4 ft. base, 2 ft. high W. of cor.

Desc. 116 ft. over NW. slope.

49.65 Wash, 20 lks. wide, course NE. Asc. 18 ft. over SE. slope.

53.10 Spur, slopes E. Desc. 31 ft. over NE. slope.


54.75 Old trail, bears NE, and SW.

55.60 Wash, 30 lks. wide, course SE. Asc. 173 ft. over SW. slope.

66.35 Spur, slopes SE. Thence along nearly level E. slope.

78.50 Wash, 20 lks. wide, course E. Asc. 18 ft. over SE. slope.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 5 ins. in the ground to bedrock, with stone 6x6x4 ins. marked with a cross deposited at base, and in a mound of stone to top for cor. of secs. 11, 12, 13, and 14, with brass cap marked



1933

No suitable bearing trees available.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, oak, pinion, and juniper.

Undergrowth, oakbrush, manzanita, and cacti.

S. 89° 56' E., on a random line, bet. secs. 12 and 13.

40.00 Set temp. 1/2 sec. cor.

80.36 Intersect the E. bdy. of Tp., at 9 lks. S. of cor. of secs. 12 and 13, hereinbefore described.

Thence,

West, on true line, bet. secs. 12 and 13.

Over mountainous land, through scattering timber and dense undergrowth.


Asc. 227 ft. over SE. slope.

16.50 Spur, slopes NE. Desc. 100 ft. over NW. slope.

26.55 Wash, 10 lks. wide; course NE. Asc. 257 ft. over broken SE. slope.

39.00 Continue along S. slope.

## Resurvey and survey of Subdivision Lines of T. 13 N., R. 1 W.

Chains	
40.36	(40.00 chs. in departure from cor. of secs. 11, 12, 13, and 14.) Set an iron post 3 ft. long, 1 in. in diam., 15 ins. in the ground to bedrock, with stone 8x8x4 ins. marked with a cross deposited at base, and in a mound of stone to top for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{S12}{S13}$ 1933
	No suitable bearing trees available. Desc. slightly over SW. slope.
42.80	Wash, 5 lks. wide, course SE. Asc. 254 ft. over SE. slope.
52.50	Spur, slopes NE. Desc. 244 ft. over NW. slope.
62.80	Wash, 30 lks. wide, course NE. Asc. 197 ft. over SE. slope.
71.00	Spur, slopes NE. Desc. slight NW. slope.
76.25	Wash, 5 lks. wide, course NE. Asc. 72 ft. over SE. slope.
80.36	The cor. of secs. 11, 12, 13, and 14. Land, mountainous. Soil, rocky 4th. rate. Timber, oak, pinion, and juniper. Undergrowth, oakbrush, manzanita, and cacti.
	North, on Sectional Guide Meridian, bet. secs. 11 and 12. Over mountainous land, through scattering timber and dense undergrowth. Asc. 32 ft. over SE. slope.
2;70	Spur, slopes E. Desc. 54 ft. over broken NE. slope.
9.00	Wash, 10 lks. wide, course E. Asc. 57 ft. over SE. slope.
14.00	Spur, slopes E. Desc. 88 ft. over NE. slope.
18.10	Wash, 5 lks. wide, course E. Asc. 66 ft. over SE. slope.
24.00	Spur, slopes NE. Desc. 171 ft. over broken NW. slope.
40.00	Set an iron post 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock, with a stone 8x8x2 ins. marked X deposited at base, and in a mound of stone to top for $\frac{1}{4}$ sec. cor., with brass cap marked
	 1933
	No suitable bearing trees available. Desc. 80 ft. over NW. slope.
44.85	Wash, 5 lks. wide, course NE. Continue on descent of 187 ft. over broken NE. slope.

## Resurvey and survey of Subdivision Lines of T. 13 N., R. 1 W.

Chains

70.30 Wash; 50 lks. wide, course E. Old road in same, bears E. and W. Asc. 119 ft. over SE. slope.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, with a stone 8x8x4 ins. marked with a cross; deposited at base, and in a mound of stone to top for the cor. of secs. 1, 2, 11, and 12, with brass cap marked

T13NR1W	
S2	S1
S11	S12

1933

No bearing trees available.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, oak, pinion, and juniper.

Undergrowth; oakbrush, manzanita, and cacti.

East, on a random line, bet. secs. 1 and 12.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.70 Intersect E. bdy. of Tp. at 12 lks. N. of the cor. of secs. 1 and 12, hereinbefore described.

Thence,

N. 89° 55' W., on true line, bet. secs. 1 and 12.

Over mountainous land, through scattering timber and dense undergrowth.

Desc. gradually over rolling S. slope.

1.95 Old road, bears NW. and SE.

13.35 Rocky wash, 20 lks. wide, course SE. Across toe of spur from S.

15.10 Same wash, course NE, about 20 lks. wide 5 ft. deep. Along rolling S. slope.

21.75 Rocky wash, 20 lks. wide, course SE. Asc. 69 ft. over NE. slope.

31.50 Telephone line, bears NW. and SE.

40.70 Set an iron post 3 ft. long, 1 in. in diam., 27 ins. in the ground for the  $\frac{1}{4}$  sec. cor. with brass cap marked

$\frac{1}{4}$ S1
S12

1933

from which,

An oak, 6 ins. in diam., bears S. 40° W., 19 lks. dist., marked  $\frac{1}{4}$  S12 BTAn ash, 6 ins. in diam., bears N. 34 $\frac{1}{2}$ ° W., 54 lks. dist., marked  $\frac{1}{4}$  S1 BT

## Resurvey and survey of Subdivision Lines of T. 13 N., R. 1 W.

Chains	
41.60	Rocky wash, 20 lks. wide, course NE.
53.50	Enter old road, (from NE).
54.70	Leave road, bears SW. Asc. 52 ft. over SE. slope.
60.70	Spur, slopes NE., continue asc. 138 ft. over SE. slope.
80.70	The cor. of secs. 1, 2, 11 and 12.
	Land, mountainous. Timber, oak, piñon and juniper. Soil, rocky 4th. rate. Undergrowth, oakbrush, manzanita.
	North, on Sectional Guide Meridian, bet. secs. 1 and 2.
	Over mountainous land, through scattering timber and dense undergrowth. Desc. 161 ft. over NE. slope.
20.00	Shallow wash, 10 lks. wide, course NE.
34.90	Low spur, slopes E. Desc. 22 ft. over broken NE. slope.
40.00	Set an iron post 3 ft. long, 1 in. diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	No suitable bearing trees available; raise a mound of stone, 4 ft. base, 2 ft. high, W. of cor.
40.20	Wash, 20 lks. wide, course E. Asc. 21 ft. over SE. slope.
43.60	Spur, slopes E. Desc. 29 ft. over NE. slope.
44.30	Road, bears NW. and SE.
45.70	Shack, 10x12 ft. on line.
47.80	Road, bears NE. and SW.
47.70	Wire fence, bears NE. and SW.
50.00	Wash, 20 lks. wide, course NE. Asc. 12 ft. over SE. slope.
50.40	Spur, slopes E. Shack, 10x10 ft., bears W., 4 lks. dist.
51.70	Wire fence, bears NE. and SW.
53.80	Road, bears E. and SW.
57.41	Road, bears NW. and SE.
60.51	Same road, bears NE. and SW.
61.50	Wire fence, bears E. and W.
67.70	Road, bears NW. and SE.
72.51	Intersect the S. bdy. of sec. 35, T. 14 N., R. 1 W., at 61 lks. N. $89^{\circ}54'W.$ of cor. of secs. 35 and 36, hereinbefore described. At point for cor. set an iron post, 3 ft. long, 2 ins. in diam., 15 ins. in the ground to bedrock, with stone 7x7x3 ins., mkd. with a cross (+) deposited at base, and in a mound of stone to top, for closing cor. of secs. 1 and 2,

## Resurvey and survey of Subdivision Lines of T. 13 N., R. 1 W.

Chains

with brass cap marked

T14NRLWS35

S2	S1
T13N RLW	
C	C

1933

No suitable bearing trees available.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, oak, pinon and juniper.

Undergrowth, oakbrush, manzanita and cacti.

From the Std. cor. of secs. 34 and 35, on e. bdy. of Tp., hereinbefore described.

N.0°01'W., on true line, bet. secs. 34 and 35.

Over mountainous land, through thick timber and dense undergrowth.

Along NE. slope.

3.20 Spur, slopes NE. Desc. 320 ft. over NE. slope.

9.05 Trail, bears NE. and SW.

13.35 Road, bears E. and W.

14.70 Eugenic Wash, 20 lks. wide, course E. Asc. 288 ft. over SE. slope.

21.90 Power line, bears E. and W.

32.50 Spur, slopes SE. Asc. 94 ft. over SE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, with stone 2x3x3 ins. mkd. with a cross (+) deposited at base, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

	$\frac{1}{4}$	
--	---------------	--

S34 | S35

1933

No suitable bearing trees available.

Asc. 698 ft. over SE. slope.

46.65 Wash, 10 lks. wide, course SE. Continue ascent.

71.10 Ridge, bears NE. and SW. Desc. 192 ft. over N. slope.

79.04 Old trail, bears E. and W.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in the ground for cor. of secs. 26, 27, 34 and 35, with brass cap mkd.

T13N RLW	
S27   S26	
S34   S35	

1933

Resurvey and survey of Subdivision Lines of T.13 N., R.1 W.

Chains

from which,

A yellow pine, 16 ins. in diam., bears N.61°E., 25 lks. dist., marked T13N R1W S26 BT

A yellow pine, 6 ins. in diam., bears S.48°E., 30 lks. dist., marked T13N R1W S35 BT

A yellow pine, 8 ins. in diam., bears S.19½°W., 43 lks. dist., marked T13N R1W S34 BT

A yellow pine, 18 ins. in diam., bears N.71½°W., 70 lks. dist., marked T13N R1W S27 BT

Land, mountainous.

Soil, rocky 4th. rate.

Timber, yellow pine, oak, juniper, and pinion.

Undergrowth, oakbrush, manzanita, and cacti.

East, on a random line, bet. secs. 26 and 35.

40.00 Set temp. ¼ sec. cor.

79.84 Intersect the cor. of secs. 25, 26, 35, and 36.

Thence,

West, on a true line, bet. secs. 26 and 35.

Over mountainous land, through thick timber and undergrowth.

Asc. 77 ft. over NE slope.

6.25 Spur, slopes NE. Desc. 20 ft. over NW slope.

6.50 Along trail, bears from SE, to W.

9.90 Trail, bears SW.

11.50 Wash, 10 lks. wide, course NE. Asc. 517 ft. over E. slope.

27.65 Spur, slopes to N. and E. Continue ascent of 220 ft. over NE slope.

39.92 Set an iron post 3 ft. long, 1 in. in diam., 8 ins. in the ground to bedrock, with stone 6x6x4 ins. marked with a cross (X) deposited at base, and in a mound of stone to top for ¼ sec. cor., with brass cap marked

¼  $\frac{S26}{S35}$   
1933

from which,

A yellow pine, 8 ins. in diam., bears S.60°W., 8 lks. dist., marked ¼ S35 BT

Desc. 196 ft. over NW slope.

48.80 Wash, 10 lks. wide, course N. Asc. 326 ft. over NE slope.

61.15 Spur, slopes N. Mt. Elliott bears S.53°E., about 10 chs. dist. Desc. 172 ft. over NW slope.

74.15 Wash, 10 lks. wide, course NW. Asc. 47 ft. over NE slope.

## Resurvey and survey of Subdivision Lines of T. 13 N., R. 1 W.

Chains	
77.35	Spur, slopes N. Desc. gradual NW. slope.
79.84	Cor. of secs. 26, 27, 34, and 35.
	<p>Land, mountainous.            Soil, rocky 4th. rate.            Timber, yellow pine, oak, juniper, and pinion.            Undergrowth, oakbrush, manzanita, and cacti.</p>
	N.0°01'W., on true line, bet. secs. 26 and 27.
	Over mountainous land, through thick timber and dense undergrowth.
	Desc. 166 ft. over NW. slope.
6.10	Wash, 10 lks. wide, course NW. Asc. 11 ft. over SW. slope.
8.15	Spur, slopes NW. Desc. 410 ft. over NW. slope.
23.25	Wash, in bottom of canyon, 30 lks. wide, course E. Asc. 201 ft. over SE. slope.
33.55	Shallow wash, 10 lks. wide, course SE. Continue ascent.
39.00	Old road, bears NE. and SW.
40.00	Divide, bears NE. and SW.
	Set an iron post 3 ft. long, 1 in. in diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap marked
	<p>S27   S26 1935</p>
	from which,
	An oak, 16 ins. in diam., bears S. 62° E., 8 lks. dist., marked $\frac{1}{4}$ S26 BT
	A yellow pine, 8 ins. in diam., bears S. 85° W., 31 lks. dist., marked $\frac{1}{4}$ S27 BT
	Desc. gradual NW. slope.
50.30	Wash, 10 lks. wide, course SW. Asc. 29 ft. over SW. slope.
59.40	Spur, slopes W. Desc. 96 ft. over N. slope.
69.25	Wash, 20 lks. wide, course W. Asc. 60 ft. over SW. slope.
78.25	Spur, slopes SW. Desc. gradual N. slope.
80.00	Set an iron post 3 ft. long, 2 ins. in diam., 27 ins. in the ground for cor. of secs. 22, 23, 26, and 27, with brass cap marked

## Resurvey and Survey of Subdivision Lines of T.13 N., R.1 W.

Chains

T13N R1W	
S22	S23
—	
S27	S26

1933

from which,

A yellow pine, 9 ins. in diam., bears N.64½°E., 26 lks. dist., marked T13N R1W S23 BT

A yellow pine 8 ins. in diam., bears S.22°E., 59 lks. dist., marked T13N R1W S26 BT

A yellow pine, 12 ins. in diam., bears S.50°W., 68 lks. dist., marked T13N R1W S27 BT

A yellow pine, 12 ins. in diam., bears N.26°W., 50 lks. dist., marked T13N R1W S22 BT

Land, mountainous.

Soil, rocky 4th. rate.

Timber, yellow pine, oak, juniper, and pinion.

Undergrowth, oakbrush, manzanita, and cacti.

East, on a random line, bet. secs. 23 and 26.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.14 Intersect N. and S. line at 9 lks. N. of the cor. of secs. 23, 24, 25, and 26.

Thence,

N.89°56'W., on true line, bet. secs. 23 and 26.

Over mountainous land, through thick timber and dense undergrowth.

Asc. 165 ft. over NE. slope.

8.40 Spur, slopes N. Desc. 14 ft. over NW. slope.

13.40 Head of wash, course NE.; asc. 68 ft. over NE. slope.

18.20 Along road, from SE.

20.60 Leave same, bears NW.

22.30 Spur, slopes SE.; desc. 240 ft. over SW. slope.

38.05 Wash, 15 lks. wide, course S.; asc. 40 ft. over E. slope.

40.07 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S23

S26

1933

and raise a mound of stone, 4 ft. base, 3 ft. high, N. of cor.



## RESURVEY AND SURVEY OF SUBDIVISIONS OF T.13 N., R.1 W.

## Chains

Asc. 246 ft. over E. slope.

48.90 Fence, bears NE. and SW.; enter heavy pine timber, bears N. and S.

49.35 Divide, bears NE. and SW.; desc. 82 ft. over NW. slope.

54.95 Old road, bears NE. and SW.

56.35 Wash, 10 lks. wide, course SW.; asc. 37 ft. over SE. slope.

62.20 Old road, bears NE. and SW.

62.60 Spur, slopes SW.; desc. 77 ft. over NW. slope.

80.14 The cor. of secs. 22, 23, 26 and 27.

Land: mountainous.

Soil: rocky, 4th rate.

Timber: yellow pine, oak, juniper, pinon.

Undergrowth: oakbrush, manzanita, cacti.

N.0°01'W., bet. secs. 22 and 23.

Desc. 36 ft. over NW. slope; through heavy pine, oak and juniper timber and dense undergrowth.

1.30 Wash, 10 lks. wide, course W.; asc. 9 ft. over SW. slope.

4.75 Spur, slopes SW.; along W. slope on level.

6.25 Change to NW. slope; desc. 12 ft.

7.65 Road, bears NE. and SW.

8.85 Wash, 10 lks. wide, course SW.; asc. 134 ft. over SW. slope.

13.90 Same wash, course SE.; continue ascent.

23.15 Ridge, bears E. and W.; desc. 200 ft. over NE. slope.

31.20 Old road, bears NE. and SE.

40.00 True point for  $\frac{1}{4}$  sec. cor. falls in bottom of wash, 30 lks. wide, course W., at foot of mining dump.

Asc. 15 ft. over S. slope.

40.40 Road, bears E. and W.

40.60 (60 lks. N.0°01'W. of true point) Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for witness cor. to  $\frac{1}{4}$  sec. cor., with brass cap mkd.



from which

An oak, 9 ins. diam., bears N.43°E., 67 lks. dist., mkd.  
WC  $\frac{1}{4}$  S23 BT.

An oak, 6 ins. diam., bears N.37°W., 37 lks. dist., mkd.  
WC  $\frac{1}{4}$  S22 BT.

Asc. 123 ft. over S. slope.

RESURVEY AND SURVEY OF SUBDIVISIONS OF T.13 N., R.1 W.

- Chains  
 49.30 Spur, slopes W.; desc. 75 ft. over NW. slope.  
 49.50 Old trail, bears NE. and SW.  
 53.50 Wash, 10 lks. wide, course SW.; asc. 165 ft. over S. slope.  
 63.50 Spur, slopes SW.; desc. 261 ft. over NW. slope.  
 79.50 Bottom of rocky canyon, 30 lks. wide, course SW.; asc. 10 ft. over SW. slope.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 14,15,22 and 23, with brass cap mkd.

T13NR1W  
 S15 | S14  
 S22 | S23  
 1933

from which

- An oak, 7 ins. diam., bears N.73½°E., 41 lks. dist., mkd. T13N R1W S14 BT.  
 A yellow pine, 24 ins. diam., bears S.5°E., 209 lks. dist., mkd. T13N R1W S23 BT.  
 An oak, 11 ins. diam., bears S.26°W., 44 lks. dist., mkd. T13N R1W S22 BT.  
 An oak, 6 ins. diam., bears N.74°W., 13 lks. dist., mkd. T13N R1W S15 BT.  
 Land: mountainous.  
 Soil: clay loam, rocky, 3rd rate.  
 Timber: oak, juniper, yellow pine, pinon.  
 Undergrowth: oakbrush, manzanita, cacti.

- S.89°56'E., on random line, bet. secs. 14 and 23.  
 40.00 Set temp. sec. cor.  
 79.98 Intersect the cor. of secs. 13,14,23 and 24.  
 Thence  
 N.89°56'W., on true line, bet. secs. 14 and 23.  
 Asc. 79 ft. over SE. slope; through heavy oak, juniper and yellow pine timber and medium undergrowth.  
 5.73 Old trail, bears NE. and SW.  
 6.00 Spur, slopes NE.; along N. slope on level.  
 9.60 Change to NW. slope; desc. 35 ft.  
 11.70 Wash, 10 lks. wide, course NE.; asc. 380 ft. over NE. slope.  
 19.40 Trail, bears N. and S.  
 28.60 Divide, bears N. and S.; desc. 61 ft. over SW. slope.  
 30.40 Wire fence, bears N. and S.  
 37.20 Head of wash, course SW.; over gradual SE. slope.

## RESURVEY AND SURVEY OF SUBDIVISIONS OF T.13 N., R.1 W.

## Chains

39.99 Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground to bedrock, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S14  
—  
S23

1933

from which

A pinon, 12 ins. diam., bears N.58°E., 76 lks. dist., mkd.  $\frac{1}{4}$  S14 BT.

A juniper, 16 ins. diam., bears S.54°W., 42 lks. dist., mkd.  $\frac{1}{4}$  S23 BT.

Asc. 94 ft. over SE. slope.

52.45 Spur, slopes SW.; desc. 509 ft. over W. slope.

69.50 Trail, bears NW. and SE.

78.20 Rocky wash, 30 lks. wide, course SW.; along edge of same.

79.98 The cor. of secs. 14, 15, 22 and 23.

Land: mountainous.

Soil: clay loam, rocky, 3rd and 4th rates.

Timber: oak, juniper, yellow pine and pinon.

Undergrowth: oak brush, manzanita, cacti.

N.0°01'W., bet. secs. 14 and 15.

Asc. 308 ft. over SW. slope; through heavy oak, juniper and pinon timber and medium undergrowth.

16.50 Spur, slopes SW.; desc. 68 ft. over NW. slope.

27.10 Wash, near head, course SW.; asc. 48 ft. over SW. slope.

34.20 Spur, slopes W.; desc. 117 ft. over NW. slope.

35.50 Trail, bears NW. and SE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S15 | S14  
—  
1933

from which

A yellow pine, 18 ins. diam., bears N.56°E., 55 lks. dist., mkd.  $\frac{1}{4}$  S14 BT.

An oak, 8 ins. diam., bears S.46°W., 65 lks. dist., mkd.  $\frac{1}{4}$  S15 BT.

Desc. 81 ft. over NW. slope.

43.40 Wash, 10 lks. wide, course NW.; asc. 7 ft.

45.80 Spur, slopes W.; desc. 21 ft. over NW. slope.

47.25 Wash, 10 lks. wide, course SW.; asc. 62 ft. over SE. slope.

48.65 Trail, bears E. and W.

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

Chains  
52.80 Spur, slopes W.; desc. 172 ft. over NW. slope.  
59.60 Trail, bears NE. and SW.  
66.35 Wash, 10 lks. wide, course NW.; asc. 42 ft. over SW. slope.  
72.90 Spur, slopes W.; desc. 44 ft. over NW. slope.  
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 10, 11, 14 and 15, with brass cap mkd.

T13NR1W  
S10 | S11  
S15 | S14  
1933

from which

A yellow pine, 16 ins. diam., bears N.65°E., 63 lks. dist., mkd. T13N R1W S11 BT.

A yellow pine, 10 ins. diam., bears S.40°W., 55 lks. dist., mkd. T13N R1W S15 BT.

A yellow pine, 18 ins. diam., bears S.4°E., 50 lks. dist., mkd. T13N R1W S14 BT.

A yellow pine, 18 ins. diam., bears N.27°W., 115 lks. dist., mkd. T13N R1W S10 BT.

Land: mountainous.

Soil: rocky, 4th rate.

Timber: oak, pinon, juniper, yellow pine.

Undergrowth: oak brush, manzanita, cacti.

S.89°56'E., on random line, bet. secs. 11 and 14.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.08 A point 12 lks. N. of the cor. of secs. 11, 12, 13 and 14.

Thence.

N.89°51'W., on true line, bet. secs. 11 and 14.

Asc. 756 ft. over SE. slope; through heavy pine, oak and juniper timber and medium undergrowth.

27.50 Spur, slopes SE.; desc. 93 ft. over SW. slope.

34.45 Head of wash, course SE.; asc. 100 ft. over SE. slope.

39.50 Spur, slopes S.; over gradual SW. slope.

40.04 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S11  
 $\frac{1}{4}$  S14

1933

from which

A juniper, 30 ins. diam., bears N.79°E., 107 lks. dist., mkd.  $\frac{1}{4}$  S11 BT.

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

## Chains

A juniper, 20 ins. diam., bears S.52°E., 31 lks. dist.,  
mkd.  $\frac{1}{4}$  S14 BT.

Desc. 116 ft. over SW. slope.

47.40 Head of wash, course SE.; asc. 21 ft. over SE. slope.

50.00 Divide, bears N. and S.; desc. 364 ft. over SW. slope.

61.56 Wire fence, bears NW. and SE.

69.50 Wash, 10 lks. wide, course NW.; asc. 25 ft. over N. slope.

76.90 Spur, slopes NW.; desc. 57 ft. over W. slope.

80.08 The cor. of secs. 10,11,14 and 15.

Land: mountainous.

Soil: rocky, 4th rate.

Timber: oak, juniper, pinon, yellow pine.

Undergrowth: oak brush, manzanita, cacti.

N.0°01'W., bet. secs. 10 and 11.

Desc. 35 ft. over NW. slope; through heavy juniper, oak,  
pine and pinon timber and medium undergrowth.

1.70 Wash, 10 lks. wide, course W.; asc. 109 ft. over S. slope.

9.80 Ridge, brs. E & W.; desc. 169 ft. over NE. slope.

28.40 Wash, 10 lks. wide, course N.70°E.; continue descent.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$   
 S10 | S11  
 1933

from which

A juniper, 14 ins. diam., bears N.60°E., 27 lks. dist.,  
mkd.  $\frac{1}{4}$  S11 BT.

A pinon, 7 ins. diam., bears S.23°W., 14 lks. dist.,  
mkd.  $\frac{1}{4}$  S10 BT.

Desc. 11 ft. over NE. slope; through scattering timber.

43.60 Wash, 10 lks. wide, course E.; asc. 175 ft. over SE. slope.

58.10 Spur, slopes NE.; desc. 141 ft. over NE. slope.

67.00 Head of wash, course NE.; asc. 45 ft. over SE. slope.

75.50 Ridge, bears NE. and SW. Desc. 114 ft. over NW. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in the  
ground, with a stone mkd. X deposited at base, and in a  
mound of stone to top, for cor. of secs. 2,3,10 and 11,  
with brass cap mkd.

T13N1W  
 S3 | S2  
 S10 | S11  
 1933

No suitable bearing trees available.

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

## Chains

Land: rolling and mountainous.  
Soil: clay loam, 3rd and 4th rates.  
Timber: oak, juniper, pinon, yellow pine.  
Undergrowth: oakbrush, manzanita, cacti.

S.89°51'E., on random line, bet. secs. 2 and 11.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.08 A point 20 lks. S. of the cor. of secs. 1,2,11 and 12.

Thence

West, on true line, bet. secs. 2 and 11.

Asc. 116 ft. over E. slope; through scattering oak, pinon, juniper and pine timber and dense undergrowth.

7.70 Spur, slopes S.; desc. 115 ft. over SW. slope.

16.60 Wash, 10 lks. wide, course S.; asc. 111 ft. over E. slope.

22.00 Spur, slopes S.; desc. 38 ft. over S. slope.

25.40 Wash, 10 lks. wide, course SE.; asc. 149 ft. over SE. slope.

40.04 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, with a stone, 7 x 7 x 2 ins., mkd. X, deposited at base, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

132  
#S11  
1933

from which

A juniper, 4 ins. diam., bears S.75°E., 27 lks. dist., mkd. # S11 BT.

No other suitable trees available.

Asc. 437 ft. over SE. slope.

66.20 Spur, slopes S.; desc. 17 ft. over SW. slope.

71.74 Wire fence, bears NW. and SE.

76.10 Head of wash, course SE.; asc. 30 ft. over SE. slope.

78.50 Ridge, course SE., bears NE. and SW.; desc. 36 ft. over NW. slope.

80.08 The cor. of secs. 2,3,10 and 11.

Land: rolling and mountainous.  
Soil: adobe loam, 3rd and 4th rates.  
Timber: oak, juniper, yellow pine, pinon.

N.0°01'W., on true line, bet. secs. 2 and 3.

Desc. 445 ft. over NW. slope; through scattering oak and juniper timber and dense undergrowth.


40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor.,

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T. 13 N., R.1 W.

Chains	
	$\begin{array}{c} \frac{1}{4} \\ S3   S2 \\ 1933 \end{array}$
	from which
	A juniper, 6 ins. diam., bears N.3°E., 132 lks. dist., mkd. $\frac{1}{2}$ S2 BT.
	No other suitable trees available.
	Desc. 79 ft. over NE. slope.
44.65	Spur, slopes NW.; continue descent.
53.20	Wash, 5 lks. wide, course NW.; asc. gradual SW. slope.
65.20	Fence, bears E. and W.
68.31	Intersect the SE. end line (2-3 line) of the IRONSIDES patented lode claim; mineral survey No. 2428, at a point 2.09 chs. S.60°45'W. of its cor. No.2, which is a granite stone, 12 x 8 x 8 ins. above ground, firmly set and mkd. IS 2 2428. Over patented land.
69.00	Spur, slopes W.; desc. 21 ft. over NW. slope.
72.59	Intersect the S. bdy. of sec. 34, T.14 N., R.1 W.; at intersection
	Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground, with a stone, 6 x 6 x 2 ins., mkd. X, deposited at base, and in a mound of stone to top, for closing cor. of secs. 2 and 3, with brass cap mkd.
	$\begin{array}{c} T14NR1W \\ S34 \\ S3   S2 \\ T13NR1W \\ C C \\ 1933 \end{array}$
	No suitable bearing trees available.
	From point of intersection the cor. of secs. 34 and 35, only, hereinbefore described, bears S.89°54'E., 3.73 chs. dist.
	Land: mountainous. Soil: adobe loam, 4th rate. Timber: pinon and juniper. Undergrowth: oakbrush, manzanita and cacti.
-----	
	From the standard cor. of secs. 33 and 34, on the S. bdy. of the Tp., hereinbefore described,
	N.0°01'W., on true line, bet. secs. 33 and 34.
	Over gradual SW. slope; through heavy yellow pine, oak, juniper and pinon timber and medium undergrowth.
1.70	Spur, slopes NW.; desc. 115 ft. over NW. slope.
7.95	Wash, 10 lks. wide, course NW.; asc. 89 ft. over SW. slope.
11.72	Power line, bears E. and W.
12.30	Trail, bears E. and W.
13.35	Telephone line, parallels power line.

RESURVEY AND SURVEY OF SUBDIVISIONAL LINES OF T.13 N., R.1 W.

- Chains
- 16.00 Divide, bears SE. and NE.; desc. 252 ft. over NW. slope.
  - 25.00 Old road, bears NW. and SE.
  - 32.20 Wash, 10 lks. wide, course NW.; asc. 24 ft. over gradual SW. slope.
  - 37.82 Intersect the SE. side line (3-4 line) of the AMULET patented lode claim, mineral survey No. 2683, at a point 7.63 chs. S.53°15'W. of its cor. No. 3, which is a stone, 12 x 10 x 10 ins. above ground, firmly set, mkd. 3 A2683, and witnessed as described in the official record. Over patented land.
  - 40.00 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.




from which

- A pine, 6 ins. diam., bears N.30°E., 20 lks. dist., mkd.  $\frac{1}{4}$  S34 BT.
- A juniper, 8 ins. diam., bears N.47°W., 31 lks. dist., mkd.  $\frac{1}{4}$  S33 BT.

Over gradual SW. slope.

- 41.30 Spur, slopes W.; desc. 83 ft. over NW. slope.
- 47.77 Road, bears NE. and SW.; wash, 10 lks. wide, course SW.; asc. 91 ft. over SE. slope.
- 49.16 Intersect the NW. side line (1-2 line) of the AMULET patented lode claim, mineral survey No. 2683, at a point 92 lks. S.53°15'W. of its cor. No. 2, which is a stone, 12 x 10 x 8 ins. above ground, firmly set, mkd. A 2 2683, and witnessed as described in the official record. Leave patented land.
- 60.30 Over top of flat spur, slopes SW.
- 68.80 Leave same; desc. 117 ft. over NW. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 27, 28, 33 and 34, with brass cap mkd.



from which

- A yellow pine, 7 ins. diam., bears N.40°E., 61 lks. dist., mkd. T13N R1W S27 BT.
- A yellow pine, 10 ins. diam., bears S.50°E., 45 lks. dist., mkd. T13N R1W S34 BT.
- A yellow pine, 9 ins. diam., bears S.23°W., 57 lks. dist., mkd. T13N R1W S33 BT.
- A yellow pine, 9 ins. diam., bears N.35°W., 20 lks. dist., mkd. T13N R1W S28 BT.



## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T. 13 N., R.1 W.

Chains	
	<p>Land: mountainous.            Soil: rocky, 4th rate.            Timber: yellow pine, oak, juniper, pinon.            Undergrowth: oakbrush, manzanita, cacti.</p>
	<p>East, on random line, bet. secs. 27 and 34.</p>
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.08	A point 9 lks. N. of the cor. of secs. 26, 27, 34 and 35.
	Thence
	N. 89° 56' W., on true line, bet. secs. 27 and 34.
	Desc. 202 ft. over NW. slope; through heavy pine, oak, juniper and pinon timber and medium undergrowth.
14.40	Wash, 10 lks. wide, course N.; asc. 69 ft. over NE. slope.
20.45	Spur, slopes N.; desc. 87 ft. over NW. slope.
25.25	Wash, 10 lks. wide, course N.; asc. gradual N. slope.
33.50	Spur, slopes NE.; desc. 88 ft. over NW. slope.
39.10	Wash, 30 lks. wide, course NE.; asc. 24 ft. over SE. slope.
40.04	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{S27}{S34}$ 1933
	from which
	A yellow pine, 10 ins. diam., bears South, 42 lks. dist., mkd. $\frac{1}{4}$ S34 BT.
	A yellow pine, 12 ins. diam., bears N. 22° W., 13 lks. dist., mkd. $\frac{1}{4}$ S27 BT.
	Asc. 170 ft. over SE. slope.
51.50	Change to E. slope; asc. 84 ft.
56.70	Divide, bears NE. and SW.; desc. 69 ft. over NW. slope.
68.00	Foot of descent; over N. slope on level.
71.50	Head of wash, course N.; asc. 24 ft. over NE. slope.
73.80	Spur, slopes N.; desc. 132 ft. over NW. slope.
80.08	The cor. of secs. 27, 28, 33 and 34.
	<p>Land: mountainous and rolling.            Soil: adobe loam, 3rd and 4th rates.            Timber: yellow pine, juniper, oak, pinon.            Undergrowth: oak brush, manzanita, cacti.</p>
	N. 0° 01' 30", bet. secs. 27 and 28.

RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

Chains

N.0°01'W., bet. secs. 27 and 28.

Desc. 345 ft. over NW. slope; through heavy pine, oak, juniper and pinon timber and medium undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



from which

A yellow pine, 14 ins. diam., bears S.52°E., 36 lks. dist., mkd. 1/4 S27 BT.

A yellow pine, 12 ins. diam., bears S.5°W., 43 lks. dist., mkd. 1/4 S28 BT.

40.50 Spur, slopes NW.; continue descent 235 ft. over NW. slope.

42.30 Intersect the S. side line (1-4 line) of the BANK VAULT unpatented lode claim, mineral survey No.4029, at a point 5.23 chs. S.81°25'W. of its cor. No. 4, which is a stone 16 x 12 x 12 ins. above ground, firmly set, mkd. BV 4 4029, and witnessed as described in the official record. Over surveyed mineral land.

55.20 Wash, 30 lks. wide, in canyon, course NE.; over rolling E. slope.

62.61 Intersect the NW. side line (1-2 line) of the BOHEMIAN GIRL unpatented lode claim, mineral survey No.4029, at a point 4.66 chs. S.37°03'W. of its cor. No.2, which is a stone 12 x 12 x 8 ins. above ground, firmly set, and mkd. BG 4 4029, and witnessed as described in the official record. Leave surveyed mineral land.

68.45 Intersect the SW. end line (1-2 line) of the MINNEHAHA unpatented lode claim, mineral survey No.4029, at a point 1.02 chs. S.52°57'E. of its cor. No.2, which is a stone 12 x 12 x 10 ins. above ground, firmly set, mkd. M 2 4029, and witnessed as described in the official record. Over surveyed mineral land.

71.20 Intersect the NW. side line (2-3 line) of the MINNEHAHA unpatented lode claim, mineral survey No.4029, at a point 2.28 chs. N.21°00'E. of its cor. No.2, hereinbefore described. Leave surveyed mineral land.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 21,22,27 and 28, with brass cap mkd.



from which

An oak, 5 ins. diam., bears N.58°E., 22 lks. dist., mkd. T13N R1W S22 BT.

A yellow pine, 9 ins. diam., bears S.43°E., 18 lks. dist., mkd. T13N R1W S27 BT.

A yellow pine, 10 ins. diam., bears S.27°W., 43 lks. dist., mkd. T13N R1W S28 BT.

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

Chains	
	An oak, 14 ins. diam., bears N.18°W., .35 lks. dist., mkd. T13N R1W S21 BT.
	Land: mountainous, Soil: rocky, 4th rate. Timber: oak, pinon, yellow pine, juniper, walnut. Undergrowth: scrub oak, manzanita, cacti.
	-----
	S.89°56'E., on random line, bet. secs. 22 and 27.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.90	A point 11 lks. S. of the cor. of secs. 22, 23, 26 and 27.
	Thence
	S.89°59'W., on true line, bet. secs. 22 and 27.
	Desc. 61 ft. over NW. slope; through heavy pine, oak, juniper and pinon timber and medium undergrowth.
4.60	Wash, 10 lks. wide, course SW.; asc. 51 ft. over SE. slope.
4.90	Road, bears NE. and SW.
10.75	Spur, slopes S.; desc. 23 ft. over SW. slope.
14.50	Wash, 10 lks. wide, course S.; asc. 77 ft. over SE. slope.
22.50	Spur, slopes S.; desc. 77 ft. over SW. slope.
30.80	Change to W. slope; desc. 41 ft.
39.95	Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{S22}{S27}$ 1933
	from which
	A yellow pine, 6 ins. diam., bears N.56 $\frac{1}{2}$ °E., 41 lks. dist., mkd. $\frac{1}{4}$ S22 BT.
	A yellow pine, 8 ins. diam., bears S.71°W., 46 lks. dist., mkd. $\frac{1}{4}$ S27 BT.
	Desc. 172 ft. over top of spur, on W. slope.
55.45	Wash, 10 lks. wide, course SW.; asc. 46 ft. over SE. slope.
59.30	Spur, slopes SW; desc. 224 ft. over SW. slope.
67.16	Intersect the SE. side line (1-4 line) of the MINNEHAHA unpatented lode claim, mineral survey No. 4029, at a point 5.15 chs. S.21°00'W. of its cor. No. 4, which is a stone, 12 x 12 x 8 ins. above ground, firmly set, mkd. M 4 4029, and witnessed as described in the official record. Over surveyed mineral land.
70.75	Wash, 40 lks. wide, course NW.; over canyon bottom.
72.30	Trail, bears NW. and SE.
75.80	Old road, bears NW. and SE.

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

65  
BOOK 4005

## Chains

76.52 Intersect the NW. side line (2-3 line) of the MINNEHAHA patented lode claim, mineral survey No. 4029, at a point 11.71 chs. N.21°00'E. of its cor. No. 2, hereinbefore described. Leave surveyed mineral land.

77.15 Old road, bears N. and S.

77.50 Wash, 20 lks. wide, course N.; asc. 48 ft. over NE. slope.

79.90 The cor. of secs. 21, 22, 27 and 28.

Land: mountainous and rolling.

Soil: adobe loam, 3rd and 4th rates.

Timber: oak, yellow pine, juniper, pinon, walnut.

Undergrowth: scrub oak, manzanita, cacti.

N.0°01'W., bet. secs. 21 and 22.

Desc. 94 ft. over NE. slope; through heavy pine, juniper oak and pinon timber and medium undergrowth.

20.35 Road, bears NW. and SE.

21.80 Wash, 40 lks. wide, course NW.; asc. 138 ft. over SW. slope.

30.45 Spur, slopes W.; desc. 160 ft. over N. slope.

37.40 Wash, 50 lks. wide, course W.; asc. 37 ft. over SW. slope.

39.60 Road, bears NW. and SE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor.; with brass cap mkd.

S21 | S22

1933

from which

An oak, 9 ins. diam., bears N.68°E., 53 lks. dist., mkd.  $\frac{1}{4}$  S22 BT.

An oak, 20 ins. diam., bears N.6°W., 55 lks. dist., mkd.  $\frac{1}{4}$  S21 BT.

Asc. 143 ft. over SW. slope.

60.80 Spur, slopes W.; asc. 12 ft. over top of spur.

73.70 Spur, slopes NW.; desc. 97 ft. over NE. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 15, 16, 21 and 22, with brass cap mkd.

T13NR1W

S16 | S15

S21 | S22

1933

from which

A yellow pine, 10 ins. diam., bears N.41°E., 76 lks. dist., mkd. T13N R1W S15 BT.

A yellow pine, 8 ins. diam., bears S.21°E., 48 lks. dist., mkd. T13N R1W S22 BT.

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

Chains	<p>A juniper, 18 ins. diam., bears S, 35°W., 76 lks. dist., mkd. T13N R1W S21 BT.</p> <p>A yellow pine, 14 ins. diam., bears N.40°W., 55 lks. dist., mkd. T13N R1W S16 BT.</p> <p>Land: mountainous. Soil: rocky, 4th rate. Timber: oak, pine, juniper, pinon. Undergrowth: scrub oak, manzanita, cacti.</p>
	N.89°59'E., on random line, bet. secs. 15 and 22.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.08	A point 7 lks. N. of the cor. of secs. 14, 15, 22 and 23.
	Thence
	N.89°58'W., on true line, bet. secs. 15 and 22.
	Desc. 22 ft. over SW. slope; through light oak, pinon, juniper and pine timber and medium undergrowth.
1.30	Wash, 10 lks. wide, course S.° asc. 148 ft. along S. slope.
21.20	Spur, slopes SW.; desc. 110 ft. over W. slope.
28.60	Wash, 10 lks. wide, course SW.; asc. 35 ft. over SE. slope.
33.65	Spur, slopes S.; desc. 57 ft. over SW. slope.
40.04	Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, with a stone, 8 x 7 x 4 ins. diam., deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4}S15$ $\frac{1}{4}S22$ 1933
	No suitable bearing trees available.
	Desc. 151 ft. over SW. slope.
62.80	Spur, slopes S.; desc. 207 ft. over SW. slope.
77.35	Wash, 30 lks. wide, course NW.; asc. 45 ft. over NE. slope.
80.08	The cor. of secs. 15, 16, 21 and 22.
	<p>Land: mountainous, Soil: rocky, 4th rate. Timber: pinon, oak, juniper, yellow pine. Undergrowth: oak brush, manzanita, cacti.</p>
	N.0°01'W., bet. secs. 15 and 16.
	Desc. 68 ft. over NE. slope; through heavy oak, pinon, juniper and pine timber and medium undergrowth.
5.20	Wash, 30 lks. wide, course W.; asc. 76 ft. over SW. slope.
10.00	Spur, slopes W.; desc. 40 ft. over NW. slope.

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

Chains	
14.10	Wash, 10 lks. wide, course SW.; asc. 288 ft. over SW.slope.
27.20	Spur, slopes W.; desc. 245 ft. over N. slope.
38.00	Change to NE. slope; desc. 28 ft.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4}$ S16   S15 1933
	from which
	An oak, 5 ins. diam., bears N.66°E., 7 lks. dist., mkd. $\frac{1}{4}$ S15 BT.
	A pine, 14 ins. diam., bears S.4°W., 198 lks. dist., mkd. $\frac{1}{4}$ S16 BT.
	Desc. 9 ft. over NE. slope.
40.60	Wash, 25 lks. wide, course NW.; asc. 415 ft. over SW.slope.
63.30	Top of hill, on spur, slopes NW.; desc. 261 ft. over N. slope.
78.70	Old road, bears NW. and SE.
79.20	Old road, bears NW. and SE.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 9,10,15 and 16, with brass cap mkd.
	T13NR1W S9   S10 S16   S15 1933
	from which
	An oak, 6 ins. diam., bears N.82°E., 27 lks. dist., mkd. T13N R1W S10 BT.
	An oak, 4 ins. diam., bears S.86°E., 29 lks. dist., mkd. BT.
	A juniper, 7 ins. diam., bears S.86°W., 71 lks. dist., mkd. T13N R1W S16 BT.
	A juniper, 12 ins. diam., bears N.2°W., 58 lks. dist., mkd. T13N R1W S9 BT.
	Land: mountainous. Soil: rocky, 4th rate. Timber: pine, oak, juniper, pinon. Undergrowth: oak brush, manzanita, cacti.
	-----
	S.89°58'E., on random line, bet. secs.10 and 15.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.00	Intersect the cor. of secs. 10,11, 14 and 15.
	Thence

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

Chains	
	N.89°58'W., on true line, bet. secs. 10 and 15.
	Desc. 10 ft. over NW. slope; through heavy pine, oak, pinon and juniper timber and medium undergrowth:
0.90	Wash, 10 lks. wide, course N.; asc. 10 ft.
2.40	Spur, slopes N.; desc. 67 ft. over NW. slope.
7.40	Wash, 10 lks. wide, course NW.; asc. 25 ft. over NE. slope.
7.90	Trail, bears NW. and SE.
9.60	Spur, slopes NE.; desc. 182 ft. over NW. slope along S. edge of canyon bottom.
34.20	Wash, 10 lks. wide, course N.; asc. 20 ft. over E. slope.
38.05	Spur, slopes N.; desc. 19 ft. over NW. slope.
39.55	Wash, 5 lks. wide, course N.; over gradual NE. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4}$ S10 $\frac{1}{4}$ S15 1933
	from which
	A juniper, 8 ins. diam., bears N.55°E., 18 lks. dist., mkd. $\frac{1}{4}$ S10 BT.
	A juniper, 7 ins. diam., bears S.57°W., 50 lks. dist., mkd. $\frac{1}{4}$ S15 BT.
	Asc. 11 ft. over NE. slope.
40.90	Spur, slopes NE.; desc. 42 ft. over NW. slope.
44.00	Wash, 10 lks. wide, course NE.; asc. 84 ft. over E. slope.
50.25	Spur, slopes N.; desc. 82 ft. over NW. slope.
57.20	Wash, 10 lks. wide, course NE.; asc. 92 ft. over E. slope.
64.80	Spur, slopes N.; desc. 141 ft. over SW. slope.
77.00	Wash, 10 lks. wide, course NW.; over NE. slope.
80.00	The cor. of secs. 9, 10, 15 and 16.
	Land: mountainous. Soil: rocky, 4th rate. Timber: pine, oak, juniper, pinon. Undergrowth: oak brush, manzanita, cacti.
	-----
	N.0°01'W., bet. secs. 9 and 10.
	Desc. 44 ft. over NE. slope; through heavy oak, pine, juniper and pinon timber and medium undergrowth.
2.50	Wash, 10 lks. wide, course NW.; asc. 8 ft.
3.80	Spur, slopes W.; desc. 50 ft. over gradual NW. slope.

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

- Chains  
10.30 Wash, 10 lks. wide, course W.; asc. 82 ft. over SW. slope.  
16.15 Spur, slopes NW.; desc. 303 ft. over NE. slope.  
34.65 Wash, 20 lks. wide, in canyon, course W.; asc. 157 ft. over S. slope.  
40.00 Set an iron post, 3 ft. long, 1 in. diam., on exposed bed-rock, supported in a mound of stone, 4 ft. base, 2½ ft. high, for ¼ sec. cor., with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ \hline 39 | S10 \\ \hline 1933 \end{array}$$

from which

A juniper, 8 ins. diam., bears N.72°E., 64 lks. dist., mkd. ¼ S10 BT.

A juniper, 8 ins. diam., bears N.1½°W., 59 lks. dist., mkd. ¼ S9 BT.

Asc. 60 ft. over S. slope.

- 44.10 Change to NW. slope; desc. 29 ft.  
48.30 Wash, 10 lks. wide, course SW.; asc. 108 ft. over S. slope.  
56.90 Knoll, on spur, slopes W.; desc. 72 ft. over NW. slope.  
67.45 Wash, 10 lks. wide, course SW.; asc. 65 ft. over SW. slope. Enter scattering timber, bears E. and W.  
76.20 Spur, slopes NW.; over level top of same.  
78.00 Leave spur; desc. 40 ft. over N. slope.  
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground, with a stone, 9 x 9 x 2 ins., mkd. X, deposited at base, and in a mound of stone to top, for cor. of secs. 3, 4, 9 and 10, with brass cap mkd.

$$\begin{array}{c} T13NR1W \\ \hline S4 | S3 \\ \hline 39 | S10 \\ \hline 1933 \end{array}$$

No suitable bearing trees available.

Land: mountainous.

Soil: rocky, 4th rate.

Timber: oak, juniper, pinon.

Undergrowth: oak brush, manzanita, cacti.

S.89°58'E., on random line, bet. secs. 3 and 10.

- 40.00 Set temp. ¼ sec. cor.  
80.08 A point 5 lks. S. of the cor. of secs. 2, 3, 10 and 11.

Thence

West, on true line, bet. secs. 3 and 10.

Desc. 123 ft. over NW. slope; through heavy juniper, oak and pinon timber and medium undergrowth.



## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

Chains	
5.00	Wash, 7 lks. wide, course N.; asc. 267 ft. over NE. slope.
17.90	Spur, slopes NW.; desc. 148 ft. over NW. slope.
24.20	Head of ravine, course NW.; asc. 39 ft. over NE. slope.
40.04	Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4} \begin{array}{l} S3 \\ S10 \end{array}$ 1933
	from which
	A juniper, 14 ins. diam., bears N.30°E., 43 lks. dist., mkd. $\frac{1}{4}$ S3 BT.
	A juniper, 18 ins. diam., bears S.80°E., 82 lks. dist., mkd. $\frac{1}{4}$ S10 BT.
	Desc. 25 ft. over NW. slope.
43.55	Wash, near head, course NW; asc. 39 ft. over NE. slope.
47.55	Spur, slopes NW.; desc. 148 ft. over SW. slope.
48.20	Road, bears NE. and SW.; enter scattering timber.
56.30	Wash, 5 lks. wide, course NW.; asc. 37 ft. over NE. slope.
60.60	Spur, slopes N.; desc. 56 ft. over NW. slope.
67.00	Wash, 5 lks. wide, course N.; asc. 152 ft. over NE. slope.
80.08	The cor. of secs. 3, 4, 9 and 10.
	Land: mountainous. Soil: rocky, 4th rate. Timber: oak, juniper, pinon. Undergrowth: oak brush, manzanita, cacti.
-----	
	N.0°01'W., on true line, bet. secs. 3 and 4.
	Desc. 414 ft. over general NE. slope, to wash; through scattering oak, juniper and pinon timber and dense brush.
10.00	Spur, slopes N., from SE.
20.00	Leave spur, turns to NW.
36.50	Wash, 10 lks. wide, course NW.; asc. 9 ft.
38.00	Spur, slopes W.; over gradual NW. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 25 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4} \begin{array}{l} S4 \\ S3 \end{array}$ 1933
	from which
	A juniper, 5 ins. diam., bears S.59°E., 29 lks. dist., mkd. $\frac{1}{4}$ S3 BT.

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

## Chains

A juniper, 10 ins. diam., bears N.88°W., 43 lks. dist., mkd.  $\frac{1}{4}$  S4 BT.

Desc. 10 ft. over NW. slope.

40.70 Wash, 5 lks. wide, course W.; asc. 87 ft. over SW. slope.

50.00 Spur, slopes West.

52.20 Road, bears NE. and SW.

53.70 Wash, 10 lks. wide, course SW.; asc. 106 ft. over SE. slope.

63.00 Spur, slopes W.; desc. 97 ft. over NE. slope.

68.40 Fence, bears E. and W.

70.30 Wash, 10 lks. wide, course W.; asc. 12 ft. over SW. slope.

72.31 Intersect the S. bdy. of sec. 33, T.14 N., R.1 W.; at intersection

Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground and in a mound of stone to top, for closing cor. of secs. 3 and 4, with brass cap mkd.

T14NR1W  
S33  
-----  
S4 | S3  
T13N | R1W  
C C  
1933

from which

An oak, 5 ins. diam., bears S.57 $\frac{1}{2}$ °E., 42 lks. dist., mkd. T13N R1W S3 CC BT.

An oak, 5 ins. diam., bears S.41°W., 10 lks. dist., mkd. T13N R1W S4 CC BT.

From point of intersection the cor. of secs. 33 and 34, only, hereinbefore described, bears N.89°32'E., 5.65 chs. dist.

Land: mountainous.

Soil: rocky, 4th rate.

Timber: oak, juniper and pinon.

Undergrowth: oak brush, manzanita and cacti.

Beginning at the standard cor. of secs. 32 and 33, on the S. bdy. of the Tp., hereinbefore described,

N.0°02'W., on true line, bet. secs. 32 and 33.

Asc. 37 ft. over SE. slope; through heavy pine, juniper, oak and pinon timber and medium undergrowth.

4.00 Spur, slopes E.; desc. 55 ft. over NE. slope.

6.35 Intersect the SE. side line (1-4 line) of the NEW CENTURY patented lode claim, mineral survey No.4031, at a point 10.83 chs. S.36°36'W. of its cor. No.4, which is a stone, 16 x 12 x 10 ins. above ground, firmly set, mkd. with cross on top and NC 4 4031, witnessed as described in the official record. Over patented mineral land.

15.32 Power line, bears NW. and SE.

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

Chains  
 23.10 Wash, 10 lks. wide, course E.; asc. 147 ft. over SE.slope.  
 25.80 Old road, bears NW. and SE.  
 29.15 Same road, bears NE. and SW.  
 36.30 Spur, slopes E.; desc. 20 ft. along E. slope.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\begin{array}{c} \uparrow \\ \text{S32} | \text{S33} \\ \text{1933} \end{array}$

from which

A yellow pine, 24 ins. diam., bears N.62°E., 41 lks. dist., mkd.  $\frac{1}{4}$  S33 BT.

An oak, 14 ins. diam., bears N.89°W., 29 lks. dist., mkd.  $\frac{1}{4}$  S32 BT.

Desc. 30 ft. over NE. slope.

41.45 Head of wash, course E.; asc. 41 ft. over SE. slope.  
 43.40 Intersect the NW. side line (2-3 line) of the EIGHTY-SIX patented lode claim, mineral survey No.1724, at a point 6.68 chs. N.17°27'E. of its cor. No. 2, which is stone, 12 x 12 x 10 ins. above ground, firmly set and mkd. 3 MT 1724 on S. and 2 ES on NE. faces, and witnessed as described in the official record. Leave patented land.  
 49.10 Spur, slopes E.; along broken E. slope.  
 61.25 Wash, 10 lks. wide, course SE.; asc. 79 ft. over S. slope.  
 65.75 Spur, slopes E.; desc. 31 ft. over NE. slope.  
 68.55 Wash, 10 lks. wide, course E.; asc. 97 ft. over SE. slope.  
 78.10 Change to E. slope; desc. 21 ft.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 28,29,32 and 33, with brass cap mkd.

$\begin{array}{c} \text{T13N R1W} \\ \text{S29} | \text{S28} \\ \text{S32} | \text{S33} \\ \text{1933} \end{array}$

from which

A yellow pine, 6 ins. diam., bears N.30°E., 33 lks. dist., mkd. T13N R1W S28 BT.

A yellow pine, 8 ins. diam., bears S.70°E., 43 lks. dist., mkd. T13N R1W S33 BT.

A yellow pine, 20 ins. diam., bears S.16°W., 54 lks. dist., mkd. T13N R1W S32 BT.

A yellow pine, 7 ins. diam., bears N.48°W., 41 lks. dist., mkd. T13N R1W S29 BT.

Land: mountainous.

Soil: rocky, 3rd and 4th rates.

Timber: pine, oak, juniper, pinon. Undergrowth: oakbrush, manzanita, cacti.

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

Chains	
	East, on random line, bet. secs. 28 and 33.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.96	A point 9 lks. N. of the cor. of secs. 27, 28, 33 and 34.
	Thence
	N.89°56'W., on true line, bet. secs. 28 and 33.
	Desc. 200 ft. over SW. slope; through heavy pine, oak, juniper and pinon timber and medium undergrowth.
9.10	Wash, 40 lks. wide, course NE.; asc. 163 ft. over E. slope.
17.50	Spur, slopes N.; desc. 382 ft. over W. slope.
29.30	Lynx Creek, stream, 6 lks. wide, 3 ins. deep, in channel, 30 lks. wide, course N.; asc. 173 ft. over SE. slope.
38.60	Road, bears S. to Walker and N. to Prescott.
39.98	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{r} \frac{1}{4} S28 \\ \frac{1}{4} S33 \\ \hline 1933 \end{array}$
	from which
	An oak, 12 ins. diam., bears N.3°E., 52 lks. dist., mkd. $\frac{1}{4}$ S28 BT.
	An oak, 12 ins. diam., bears S.18°W., 97 lks. dist., mkd. $\frac{1}{4}$ S33 BT.
	Asc. 59 ft. over SE. slope.
45.00	Spur, slopes SE.; desc. 19 ft. along S. slope.
51.20	Wash, 10 lks. wide, course SE.; asc. 327 ft. over E. slope.
69.10	Spur, slopes SE.; desc. 116 ft. over SW. slope.
77.15	Wash, 10 lks. wide, course SE.; asc. 66 ft. over E. slope.
78.30	Trail, bears NW. and SE.
79.96	The cor. of secs. 28, 29, 32 and 33.
	Land: mountainous. Soil: adobe loam, 3rd and 4th rates. Timber: yellow pine, oak, juniper, pinon. Undergrowth: oakbrush, manzanita, cacti.
	-----
	N.0°02'W., bet. secs. 28 and 29.
	Asc. 42 ft. over SE. slope; through heavy pine, oak, pinon and juniper timber and medium undergrowth.
1.95	Trail, bears NW. and SE.
2.60	Wash, near head, course SE.; asc. 42 ft. over E. slope.
6.60	Spur, slopes E.; desc. 192 ft. over NE. slope.

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

Chains	
6.70	Trail, bears NW. and SE.
24.90	Wash, 10 lks. wide, course NE.; asc. 19 ft. over SE. slope.
28.90	Change to NE. slope; desc. 77 ft.
34.55	Wash, 10 lks. wide, course E.; over gradual SE. slope.
37.25	Change to NE. slope; desc. 12 ft.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{c} \uparrow \\ \text{S29} \mid \text{S28} \\ \text{1933} \end{array}$
	from which
	A yellow pine, 8 ins. diam., bears S.80°E., 44 lks. dist., mkd. $\frac{1}{4}$ S28 BT.
	A yellow pine, 7 ins. diam., bears N.20°W., 4 lks. dist., mkd. $\frac{1}{4}$ S29 BT.
	Desc. 166 ft. over NE. slope.
49.00	Spur, slopes NE.; desc. 157 ft. over NW. slope.
57.80	Road, bears E. and W.
59.10	Wash, 20 lks. wide, course E.; asc. 67 ft. over SE. slope.
71.00	Change to E. slope; desc. 57 ft.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground, with a stone, 8 x 8 x 3 ins., mkd. X, deposited beside, and in a mound of stone to top, for cor. of secs. 20, 21, 28 and 29, with brass cap mkd.
	$\begin{array}{c} \text{T13NR1W} \\ \text{S20} \mid \text{S21} \\ \text{S29} \mid \text{S28} \\ \text{1933} \end{array}$
	from which
	A yellow pine, 11 ins. diam., bears N.84°E., 78 lks. dist., mkd. T13N R1W S21 BT.
	No other suitable trees available.
	Land: mountainous.
	Soil: adobe loam, 3rd and 4th rates.
	Timber: yellow pine, oak, juniper, pinon.
	Undergrowth: scrub oak, manzanita, cacti.
	-----
	S.89°56'E., on random line, bet. secs. 21 and 28.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.90	A point 2 lks. S. of the cor. of secs. 21, 22, 27 and 28.
	Thence
	N.89°57'W., on true line, bet. secs. 21 and 28.
	Asc. 108 ft. over NE. slope

## RESURVEY AND SURVEY OF SUBDIVISIONS OF T.13 N., R.1 W.

Chains	
5.50	Spur, slopes NW.; along S. slope.
9.20	Change to SW. slope; desc. 199 ft.
18.00	A shack bears 50 lks. S.
19.84	Lynx Creek, water 8 lks. wide, 3 ins. deep, in channel, 70 lks. wide, course N.
21.60	Wash, from SW., enters Lynx Creek; asc. 191 ft. over SE. slope.
23.60	Old road, bears NE. and SW.
33.30	Old road, bears N. and S.
36.75	Road, bears NE. to Bannie mine and SW.
39.95	Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4}$ S21 $\frac{1}{4}$ S28 1933
	from which
	An oak, 12 ins. diam., bears N.30°E., 61 lks. dist., mkd. $\frac{1}{4}$ S21 BT.
	An oak, 6 ins. diam., bears S.30°W., 34 lks. dist., mkd. $\frac{1}{4}$ S28 BT.
	Over gradual SW. slope.
41.00	Spur, slopes S.; desc. 125 ft. over SW. slope.
47.50	Highway, bears N. to Prescott and S. to Walker.
50.00	Wash, 10 lks. wide, course NW.; over toe of spur from S.
52.30	Smith Ravine, 50 lks. wide, course NE.; asc. 213 ft. over E. slope.
67.50	Spur, slopes S.; desc. 100 ft. over W. slope.
74.85	Wash, 5 lks. wide, course SE.; road in bottom bears NW. and SE.; asc. 80 ft. over E. slope.
79.90	The cor. of secs. 20, 21, 28 and 29.
	Land: mountainous. Soil: adobe loam, 3rd and 4th rates. Timber: pine, oak, juniper, pinon. Undergrowth: oak brush, manzanita, cacti.
	-----
	N.0°02'W., bet. secs. 20 and 21.
	Over gradual E. slope; through heavy juniper, pinon and oak timber and medium undergrowth.
4.30	Spur, slopes E.; desc. 266 ft. over NE. slope.
36.90	Wash, 20 lks. wide, course N., from SW.
39.10	Leave same, turns to NE.; over gradual SE. slope.

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

Chains	
40.00	<p>Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for <math>\frac{1}{4}</math> sec. cor., with brass cap mkd.</p> <div style="text-align: center;"> <math display="block">\begin{array}{c} \frac{1}{4} \\ \uparrow \\ \text{S20} \mid \text{S21} \\ \downarrow \\ 1933 \end{array}</math> </div> <p style="text-align: right;">from which</p> <p>A yellow pine, 14 ins. diam., bears N.4°E., 20 lks. dist., mkd. <math>\frac{1}{4}</math> S21 BT.</p> <p>A yellow pine, 10 ins. diam., bears N.64°W., 26 lks. dist., mkd. <math>\frac{1}{4}</math> S20 BT.</p> <p>Desc. 44 ft. over NE. slope.</p>
49.70	Wash, 20 lks. wide, course NW.; asc. 48 ft. over SW. slope.
51.60	Highway, bears NW. to Prescott and SE. to Walker.
57.50	Road, bears E. and W.; desc. 25 ft. over NW. slope.
67.30	Spur, slopes W.; desc. 51 ft. over N. slope.
71.20	Wash, 10 lks. wide, course NW.; asc. 30 ft. over SW. slope.
75.00	Spur, slopes W.; desc. 26 ft. over NW. slope.
80.00	<p>Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 16,17,20 and 21, with brass cap mkd.</p> <div style="text-align: center;"> <math display="block">\begin{array}{c} \text{T13NR1W} \\ \text{S17} \mid \text{S16} \\ \hline \text{S20} \mid \text{S21} \\ \downarrow \\ 1933 \end{array}</math> </div> <p style="text-align: right;">from which</p> <p>A yellow pine, 12 ins. diam., bears N.58°E., 23 lks. dist., mkd. T13N R1W S16 BT.</p> <p>A yellow pine, 6 ins. diam., bears S.27<math>\frac{1}{2}</math>°E., 49 lks. dist., mkd. T13N R1W S21 BT.</p> <p>A juniper, 20 ins. diam., bears S.14°W., 51 lks. dist., mkd. T13N R1W S20 BT.</p> <p>A yellow pine, 30 ins. diam., bears N.9°W., 135 lks. dist., mkd. T13N R1W S17 BT.</p> <p>The original (1871) cor. of secs. 16,17,20 and 21 bears N.68°10'W., 7.90 chs. dist., a juniper, 10 ins. diam., mkd. and witnessed as described in the official record. I destroy the marks on the corner tree and those on the two witness trees.</p> <p>Land: mountainous. Soil: rocky, 4th rate. Timber: pine, oak, juniper, pinon. Undergrowth: oakbrush, manzanita, cacti.</p>

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

BOOK 4065

Chains	
	S.89°57'E., on random line, bet. secs. 16 and 21.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.88	A point 7 lks. N. of the cor. of secs. 15,16,21 and 22.
	Thence
	N.89°54'W., on true line, bet. secs. 16 and 21.
	Asc. 60 ft. over NE. slope; through heavy pine, juniper and oak timber and medium undergrowth.
3.90	Change to W. slope; desc. 189 ft.
6.52	Intersect the E. side line (2-3 line) of the EDITH patented lode claim, mineral survey No. 2731, at a point 12.10 chs. N.21°38'W. of its cor. No.3, which is a granite stone projecting 12 ins. above ground, firmly set, mkd. 3 E 2731, and witnessed as described in the official record. Over patented mineral land.
18.90	Wash, 10 lks. wide, course NW.; asc. 102 ft. over NE.slope.
22.39	Intersect the W. side line (1-4 line) of the STANLEY patented lode claim, mineral survey No.2731, at a point 8.28 chs. N.21°38'W. of its cor. No.4, which is a stone, 12 x 8 x 6 ins. above ground, firmly set, mkd. 4 S 2731, and witnessed as described in the official record. Leave patented mineral land.
31.70	Change to W. slope; desc. 171 ft.
39.94	Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	<u>1316</u> 1321 1933
	from which
	A yellow pine, 24 ins. diam., bears S.63°W., 69 lks. dist., mkd. $\frac{1}{4}$ S21 BT.
	A yellow pine, 4 ins. diam., bears N.42°W., 40 lks. dist., mkd. BT.
	The original (1871) $\frac{1}{4}$ sec. cor. bears N.28°11'E., 8.57 chs. dist., a stone, mkd. and witnessed as described in the official record. I destroy the corner and its witness mound.
	Desc. 42 ft. over W. slope.
41.65	Lynx Creek, 6 lks. wide, in channel, 40 lks. wide, course N.; asc. 172 ft. over NE. slope.
64.30	Road, bears NE. and SW.
66.00	Spur, slopes N.; desc. 75 ft. over NW. slope.
71.30	Wash, 10 lks. wide, course N.; asc. 73 ft. over E. slope.
78.30	Spur, slopes N.; desc. 19 ft. over NW. slope.
79.88	The cor. of secs. 16,17,20 and 21.



## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

## Chains

Land: mountainous.  
 Soil: rocky, 4th rate.  
 Timber: yellow pine and oak.  
 Undergrowth: oak brush, manzanita and cacti.

N.0°02'W., bet. secs. 16 and 17.

Desc. 89 ft. over NW. slope; through heavy yellow pine, oak and juniper timber and medium undergrowth.

2.50 Spur, slopes NW.; over NE. slope.

6.45 Wash, 5 lks. wide, course NW.; asc. 14 ft.

6.50 House of Ed. Hamblin bears West, 5.00 chs. dist.

10.50 Spur, slopes W.; desc. 78 ft. over NW. slope.

15.20 Wash, 20 lks. wide, course NE.; asc. 34 ft. over SE. slope.

21.00 Spur, slopes E.; over E. slope.

25.00 Change to gentle NE. slope; desc. 24 ft.

32.00 Spur, slopes NE.; desc. 115 ft. over NW. slope.

38.10 Wash, 20 lks. wide, course NE.; asc. 13 ft. over SE. slope.

39.05 (95 lks. S.0°02'E. of true point) Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for witness cor. to  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$   
 W | C  
 S17 | S16  
 1933

from which

A yellow pine, 12 ins. diam., bears S.46 $\frac{1}{2}$ °E., 24 lks. dist., mkd. WC  $\frac{1}{4}$  S16 BT.

A yellow pine, 10 ins. diam., bears N.70°W., 43 lks. dist., mkd. WC  $\frac{1}{4}$  S17 BT.

Over gradual SE. slope.

39.50 Road, bears N. and SW.

40.00 True point for  $\frac{1}{4}$  sec. cor. falls in road; witness cor. hereinbefore described. From the true point

Cor. No.1 of the BIG BEN patented placer claim, mineral survey No.2728, bears N.62°42'E., 14.76 chs. dist., a granite rock in place, mkd. with cross (X) and BB 1 2728, witnessed as described in the official record.

40.50 Leave road, bears S. and NW.

43.15 Same road, bears NE. and SW.

45.00 Spur, slopes E.; desc. 63 ft. over NE. slope.

49.00 Wire fence, bears NE. and SW.; 30 lks. SW. to turn to NW.

49.35 Same road, bears NW. and SE.

50.65 Wash, 30 lks. wide, from NW., course NE.; over level land.

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

BOOK 4065

## Chains

- 52.85 Enter field, bears NE. and SW.  
 54.00 Leave same, bears NE. and SW.  
 54.05 Same fence, bears NE. and SW.  
 55.65 End of spur, from W.; desc. 29 ft. over NE. slope.  
 55.70 A ~~stable~~ bears West, 10.00 chs. dist.  
 56.95 NW. cor. of house, on line.  
 60.00 Lynx Creek, water, 3 lks. wide, in channel, 40 lks. wide, course NW.; asc. 168 ft. over SW. slope.  
 74.00 Spur, slopes NW.; desc. 117 ft. over NE. slope.  
 78.20 Wash, 5 lks. wide, course NW.; asc. 43 ft. over SW. slope.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 8, 9, 16 and 17, with brass cap mkd.

T13N	R1W
S8	S9
S17	S16
1933	

from which

An oak stump, 6 ins. diam., 2 ft. high, bears N.29°E., 10 lks. dist.

A yellow pine, 10 ins. diam., bears S.33°E., 108 lks. dist., mkd. T13N R1W S16 BT.

A yellow pine, 10 ins. diam., bears S.8½°W., 148 lks. dist., mkd. T13N R1W S17 BT.

An oak, 6 ins. diam., bears N.66°W., 11 lks. dist., mkd. T13N R1W S8 BT.

Land: flat, rolling and mountainous.

Soil: loam, 2nd rate and rocky, 4th rate.

Timber: yellow pine, oak, juniper, pinon.

Undergrowth: oak brush, manzanita, cacti.

S.89°54'E., on random line, bet. secs. 9 and 16.

40.00 Set temp. ¼ sec. cor.

80.06 A point 14 lks. S. of the cor. of secs. 9, 10, 15 and 16.

Thence

West, on true line, bet. secs. 9 and 16.

Asc. 146 ft. over NE. slope; through heavy pine, oak and juniper timber and medium undergrowth.

3.30 Road, bears NW. and SE.

10.00 Spur, slopes N.; desc. 297 ft. over broken W. slope.

21.60 Old road, bears N. and S.

32.60 Wash, 5 lks. wide, course NW.; asc. 42 ft. over NE. slope.

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

Chains	
36.40	Trail, bears NW. and SE.; spur, slopes NW.; desc. 30 ft. over SW. slope.
40.03	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{r} S9 \\ \hline S16 \\ 1933 \end{array}$
	from which
	A juniper, 5 ins. diam., bears S.11 $\frac{1}{4}$ °E., 20 lks. dist., mkd. $\frac{1}{4}$ S16 BT.
	A juniper, 14 ins. diam., bears N.3°W., 22 lks. dist., mkd. $\frac{1}{4}$ S9 BT.
	Desc. 35 ft. over SW. slope.
46.00	Wash, 5 lks. wide, course NW.; asc. 15 ft.
48.00	Spur, slopes NW.; desc. 43 ft. over W. slope.
52.50	Wash, 10 lks. wide, course N.; asc. 34 ft. over E. slope.
56.80	Spur, slopes N.; desc. 42 ft. over SW. slope.
62.15	Wash, 10 lks. wide, course NW.; asc. 8 ft.
66.00	Spur, slopes NW.; desc. 83 ft. over SW. slope.
80.06	The cor. of secs. 8,9,16 and 17.
	Land: mountainous. Soil: rocky, 4th rate. Timber: yellow pine, oak, juniper and piñon. Undergrowth: oak brush, manzanita and cacti.
-----	
	N.0°02'W., bet. secs. 8 and 9.
	Asc. 79 ft. over SW. slope; through heavy pine, juniper, oak and piñon timber and medium undergrowth.
5.40	Spur, slopes NW.; desc. 80 ft. over NE. slope.
10.40	Wash, 10 lks. wide, course NW.; desc. 14 ft.
12.60	Wash, 15 lks. wide, course W.; asc. 32 ft. over S. slope.
16.00	Spur, slopes SW.; desc. 14 ft.
17.70	Wash, 10 lks. wide, course SW.; over gradual SE. slope.
20.80	Same wash, course SE., from N.
24.50	Leave wash, from NE.; asc. 92 ft. over SE. slope.
31.40	Spur, slopes SW.; over W. slope, on level.
35.00	Spur, slopes NW.; over gradual NE. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{r} S8 \\ \hline S9 \\ 1933 \end{array}$

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W. BLOCK 4065

Chains

from which

A juniper, 5 ins. diam., bears N.18°E., 96 lks. dist.,  
mkd.  $\frac{1}{4}$  S9 BT.

A pinon, 8 ins. diam., bears S.42°W., 65 lks. dist.,  
mkd.  $\frac{1}{4}$  S8 BT.

Desc. 165 ft. over NE. slope.

51.55 Wash, 10 lks. wide, course NW.; asc. 100 ft. over broken  
SW. slope.

67.00 Spur, slopes NW.; desc. 29 ft. over W. slope.

69.00 Head of wash, course W.

72.00 Spur, slopes NW.; over broken NE. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the  
ground, and in a mound of stone to top, for cor. of secs.  
4.5.8 and 9, with brass cap mkd.

T13NR1W  
S5 | S4  
S8 | S9  
1933

from which

A pinon, 14 ins. diam., bears N.65°E., 24 lks. dist.,  
mkd. T13N R1W S4 BT.

A yellow pine, 14 ins. diam., bears S.67°E., 76 lks.  
dist., mkd. T13N R1W S9 BT.

A pinon, 18 ins. diam., bears S.67°W., 100 lks. dist.,  
mkd. T13N R1W S8 BT.

A pinon, 10 ins. diam., bears N.60°W., 45 lks. dist.,  
mkd. T13N R1W S5 BT.

Land: mountainous and rolling.

Soil: rocky, 4th rate.

Timber: yellow pine, oak, juniper and pinon.

Undergrowth: oak brush, manzanita, and cacti.

-----  
East, on random line, bet. secs. 4 and 9.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.88 Intersect the cor. of secs. 3,4,9 and 10.

Thence

West, on true line, bet. secs. 4 and 9.

Over gentle E. slope; through scattering juniper and pinon  
timber and dense undergrowth.

0.50 Spur, slopes N.; desc. 225 ft. over SW. slope.

10.90 Wash, 5 lks. wide, course NW.; asc. 49 ft. over NE. slope.

17.65 Spur, slopes NW.; desc. 20 ft. over W. slope.

22.50 Saddle, on spur, slopes N.; asc. 23 ft. over SE. slope.

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

## Chains

- 27.50 Spur, slopes SW.; desc. 212 ft. over SW. slope.
- 39.94 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, with a stone, 8 x 8 x 2 ins., mkd. X, deposited at base, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.
- S4  
—  
S9  
1933
- No suitable bearing trees available.
- Over gradual W. slope.
- 41.80 Wash, 10 lks. wide, course NW.; continue descent 41 ft. over broken W. slope.
- 48.70 Wash, 8 lks. wide, course N.; asc. 55 ft. over NE. slope.
- 54.00 Over flat top of spur, slopes NW.
- 59.40 Leave same; desc. 151 ft. over SW. slope.
- 68.60 Wash, 10 lks. wide, course NW.; asc. 18 ft.
- 74.80 Spur, slopes N.; asc. 13 ft. over NE. slope.
- 79.88 The cor. of secs. 4, 5, 8 and 9.

Land: mountainous.  
Soil: rocky, 4th rate.  
Timber: pinon and juniper.  
Undergrowth: oak brush, manzanita and cacti.

N.0°02'W., on true line, bet. secs. 4 and 5.

Desc. 24 ft. over NE. slope; through heavy oak, pinon and juniper timber and dense undergrowth.

- 2.35 Wash, 5 lks. wide, course NW.; asc. 58 ft. over SW. slope.
- 15.00 Spur, slopes NW.; desc. 164 ft. over NE. slope.
- 31.00 Wash, 15 lks. wide, course NW.; Road brs. NE. and SW. asc. 76 ft. over SW. slope.
- 32.80 Same road, bears NW. and SE.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$   
S5 | S4  
1933

from which

An oak, 5 ins. diam., bears S.58°E., 26 lks. dist., mkd.  $\frac{1}{4}$  S4 BT.

An oak, 10 ins. diam., bears N.83°W., 16 lks. dist., mkd.  $\frac{1}{4}$  S5 BT.

Over gradual S. slope.

- 41.30 Spurs, slope W. and N. Thence along W. edge of top of spur. Road, bears NE. and SW.

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

BOOK 4085

Chains	
59.00	Change to NW. slope; desc. 141 ft.
72.46	Intersect the S. bdy. of sec. 32, T.14 N., R.1 W.; at intersection
	Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground, and in a mound of stone to top, for closing cor. of sec. 4 and 5, with brass cap mkd.
	T14N R1W S32 S5   S4 T13N   R1W C C 1933
	from which
	An oak, 6 ins. diam., bears S.83 $\frac{1}{2}$ °E., 78 lks. dist., mkd. T13N R1W S4 CC BT.
	An oak, 8 ins. diam., bears S.48°W., 28 lks. dist., mkd. T13N R1W S5 CC BT.
	From point of intersection the cor. of secs. 32 and 33, only, hereinbefore described, bears S.89°53'E., 5.87 chs. dist.
	Land: mountainous and rolling. Soil: rocky, 4th rate. Timber: yellow pine, oak, juniper and pinon. Undergrowth: oak brush, manzanita and cacti.
-----	
	Beginning at the standard cor. of secs. 31 and 32, on the S. bdy. of the Tp., hereinbefore described,
	N.0°02'W., on true line, bet. secs. 31 and 32.
	Asc. 87 ft. over S. slope; through heavy pine, juniper, oak and pinon timber and medium undergrowth.
3.80	Small spur, slopes SE.; over E. slope, on level.
7.03	Intersect the NE. end line (1-4 line) of the KING PIN unpatented lode claim, mineral survey No.2786, at a point 1.76 chs. S.65°00'E. of its cor. No.1. Leave surveyed mineral land.
7.40	Change to SE. slope; asc. 104 ft.
15.00	Change to E. slope; desc. 21 ft.
16.70	Wash, 10 lks. wide, course SE.; asc. 343 ft. over SW.slope.
19.75	Old road, bears NW. and SE.
23.90	Intersect the S. end line (2-3 line) of the PAY STREAK unpatented lode claim, mineral survey No.2786, at a point 3.09 chs. S.84°49'W. of its cor. No.3. Over surveyed (unpatented) mineral land.
37.60	Spur, slopes SE.; desc. 43 ft. over NE. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

## RESURVEY AND SURVEY OF SUBDIVISIONS OF T.13 N., R.1 W.

Chains

$\begin{array}{c} \uparrow \\ \text{S31} | \text{S32} \\ \text{1933} \end{array}$

from which

A spruce, 12 ins. diam., bears N.70°E., 10 lks. dist., mkd.  $\frac{1}{2}$  S32 BT.

A yellow pine, 6 ins. diam., bears N.24°W., 17 lks. dist., mkd.  $\frac{1}{2}$  S31 BT.

Desc. 483 ft. over NE. slope, to 67.30 chs.

51.90 Wash, 10 lks. wide, course NE.

53.20 Power line, bears S.46 $\frac{1}{2}$ °E. and N.46 $\frac{1}{2}$ °W.

60.37 Intersect the N. end line (1-4 line) of the PAY STREAK NO3 unpatented lode claim, mineral survey No.2786, at a point 56 lks. S.84°49'W. of its cor. No.4. Leave surveyed (unpatented) mineral land.

67.30 Wash, 20 lks. wide, course NE.; asc. 196 ft. over S. slope.

69.28 Intersect the SW. end line (1-4 line) of the HOME STED patented lode claim, mineral survey No.1626, at a point 6.10 chs. N.70°30'W. of its cor. No.4, which is a stone 14 x 10 x 6 ins. above ground, firmly set, mkd. H 1626 and witnessed as described in the official record. Over patented mineral land.

75.32 Telephone line, bears NW. and SE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground and in a mound of stone to top, for cor. of secs. 29,30,31 and 32, with brass cap mkd.

$\begin{array}{c} \text{T13NR1W} \\ \text{S30} | \text{S29} \\ \text{S31} | \text{S32} \\ \text{1933} \end{array}$

from which

An oak, 12 ins. diam., bears N.6°E., 45 lks. dist., mkd. T13N R1W S29 BT.

A yellow pine, 18 ins. diam., bears S.47°E., 26 lks. dist., mkd. T13N R1W S32 BT.

A yellow pine, 24 ins. diam., bears S.63°W., 45 lks. dist., mkd. T13N R1W S31 BT.

An oak, 14 ins. diam., bears N.15°W., 86 lks. dist., mkd. T13N R1W S30 BT.

Land: mountainous.

Soil: rocky, 4th rate.

Timber: yellow pine, oak, pinon, juniper.

Undergrowth: oak brush, manzanita, cacti.

East, on random line, bet. secs. 29 and 32.

40.00 Set temp.  $\frac{1}{2}$  sec. cor.

79.90 A point 9 lks. N. of the cor. of secs. 28,29,32 and 33.

## RESURVEY AND SURVEY OF SUBDIVISIONS OF T.13 N., R.1 W.

BOOK 4065

Chains	
	Thence, N.89°56'W., on true line, bet. secs. 29 and 32. Asc. 293 ft. over E. slope.; through heavy pine, juniper, oak, and pinion timber and dense undergrowth.
12.28	Intersect the NE end line (3-4) of the GOAL EXTENSION unpatented lode claim, mineral survey No.4030, at a point 4.54 chs. S.72°38'E. of cor. No.3 thereof; which is a stone 18 x 12 x 10 ins. above ground, firmly set, mkd. with cross on top and GE-3-4030 and witnessed as described in the official record. Over surveyed mineral land.
12.50	Spur, slopes NE.; desc. 341 ft. over NW.slope.
17.04	Intersect the NW side line (2-3) of the GOAL EXTENSION unpatented lode claim, mineral survey No.4030, at a point 1.42 chs. S.17°22'W. of its cor. No.3, which is a stone hereinbefore described. Leave surveyed mineral land.
17.56	Intersect the NE side line (3-4) of the UNLIMITED No.2 patented lode claim, mineral survey No.1511, at a point 9.40 chs. N.12°04'W. of cor. No.3 thereof, which is a stone 14 x 10 x 10 ins. above ground, firmly set, mkd. U-2-2-1511, no official description of record. Over patented mineral land.
27.35	Wash, 20 lks. wide, course N.; asc. 262 ft. over NE.slope.
27.60	A spring bears 35 lks. S.
28.45	Trail, bears N. and S.
36.00	Spur, slopes NE.; desc. 38 ft. over NW.slope.
36.02	Intersect the W. side line (3-4) of the UNLIMITED No.3, patented lode claim, mineral survey No. 2352, at a point 11.77 chs. N.12°04'W. of cor. No.4, thereof, which is a stone 12 x 6 x 6 ins. above ground, firmly set, marked and witnessed as described in the official record. Leave patented mineral land.
38.30	Wash, 10 lks. wide, course NE.; asc. 41 ft. over NE.slope.
39.95	Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ $\frac{S\ 29}{S\ 32}$ 1933
	from which,
	An oak, 5 ins. in diam., bears N.63°E., 29 lks. dist., marked $\frac{1}{4}$ S 29 BT
	An oak, 8 ins. in diam., bears S.36°E., 20 lks. dist., marked $\frac{1}{4}$ S 32 BT
	Asc. 360 ft. over NE slope.



## RESURVEY AND SURVEY OF SUBDIVISIONS OF T. 13 N., R.1 W.

Chains	
52.20	Spur, slopes N.; desc. 28 ft. over NW. slope.
54.50	Wash, 5 lks. wide, course NW.; asc. 14 ft. over NE. slope.
57.20	Spur, slopes NW.; desc. 350 ft. over W. slope.
61.43	Trail, bears N. and S.
70.40	Wash, 10 lks. wide, course N.; asc. 327 ft. over E. slope.
74.69	Intersect the E. side line (3-4) of the HOME STED patented lode claim, mineral survey No. 1626, at a point 12.79 chs. N.2°28'W., of cor. No.4 thereof., hereinbefore described. Over patented mineral land.
79.90	The cor. of secs. 29, 30, 31, and 32. Land, mountainous. Soil, rocky 4th. rate. Timber, yellow pine, oak, juniper, and pinion. Undergrowth, oakbrush, manzanita, and cacti.
	West, on true line, bet. secs. 30 and 31.
	Asc. 22 ft. over SE slope; through heavy pine, juniper, oak, and pinion timber and dense undergrowth. Over patented mineral land.
1.60	Top of knoll, bears N. 60 lks. dist.; lookout tower on Spruce Mountain, bears S.30½°W.
3.00	Desc., 66 ft. over SW. slope.
6.93	Telephone line, bears NW. and SE.
10.15	Wash, near head, course SE.; asc. 29 ft. over E. slope.
13.70	Divide, bears N. and S.; desc. 83 ft. over W. slope.
14.96	Wire fence, bears N. and S.;
18.60	Road, bears NW and SE.
19.70	Telephone line, bears N. and S.
20.10	Wash, 10 lks. wide, course N.; asc. 68 ft. over E. slope.
22.36	Intersect the W. side line (4-5) of the VICTOR patented lode mining claim, mineral survey No.1626, at a point 2.31 chs. N.1°15'E., of cor. No.5, thereof, which is a stone 12 x 12 x 8 insl above ground, firmly set, mkd. 5-V-1626, and witnessed as described in the official record. Leave patented mineral land.
25.44	Power line, bears N.46½°W. and S.46½°E.
29.03	Intersect the S. end line (2-4) of the SURPRISE pat. lode claim, mineral survey No.691, at 57 lks. N.85°55'E. of cor. No.4 thereof. Enter patented mineral land.
	Spur, slopes N.; desc. 28 ft. over NW. slope.

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

BOOK 4065

Chains	
29.59	Intersect the W. side line (4-5) of the SURPRISE patented lode mining claim, mineral survey No. 691, at 4 lks. N.4° 01' W. of Cor. No. 4 thereof. Leave patented land.
31.80	Spur, slopes SW.; desc. 90 ft. over NW. slope.
33.04	Intersect the E. side line (2-3) of the NEVADA patented lode mining claim, mineral survey No. 690, at 7.01 chs. N.4° 23' W., of Cor. No. 3, thereof. Across patented land.
40.00	Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, and in a mound of stone to top for 1 <sup>st</sup> sec. cor., with brass cap marked
	$\begin{array}{r} \frac{1}{4} \text{ S } 30 \\ \text{S } 31 \\ 1933 \end{array}$
	from which,
	A yellow pine, 28 ins. in diam., bears N.50°E., 43 lks. dist., marked $\frac{1}{4}$ S 30 BT
	A yellow pine, 18 ins. in diam., bears S.30°E., 4 lks. dist., marked $\frac{1}{4}$ S 31 BT
	Desc. 240 ft. over NW. slope.
40.84	Intersect the west side line of the NEVADA patented lode mining claim, mineral survey No. 690, at 7.55 chs. N.4° 25' W., of Cor. No. 5, thereof. Leave patented mineral land.

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

BOOK 4065

## Chains

61.36 Intersect the E. bdy. of sec. 25, T.13 N., R.2 W.; at intersection

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. of secs. 30 and 31, with brass cap mkd.

T13N	T13N	
R2W	S30	
S25	S31	CC
	R1W	

1933

from which

A walnut, 6 ins. diam., bears N.84°E., 119 lks. dist., mkd. T13N R1W S30 CC BT.

An oak, 14 ins. diam., bears S.8°E., 64 lks. dist., mkd. T13N R1W S31 CC BT.

From point of intersection the cor. of secs. 25 and 36, only, bears South, 17.86 chs. dist.; cor. hereinbefore described.

Land: mountainous.

Soil: rocky, 4th rate.

Timber: yellow pine, oak, juniper and pinon.

Undergrowth: oak brush, manzanita and cacti.

From the cor. of secs. 29,30,31 and 32,

N.0°02'W., bet. secs. 29 and 30.

Asc. slightly along E. slope; through heavy pine, juniper, oak and pinon timber and medium undergrowth; over patented mineral land.

1.50 Top of knoll bears 1 ch. W.; desc. 182 ft. over NE. slope.

9.60 Spur, slopes NE.; desc. 91 ft. over NW. slope.

14.30 Wash, 10 lks. wide, course NE.; asc. 65 ft. over SE. slope.

16.90 Trail, bears NE. and SW.

21.10 Wash, 10 lks. wide, course NE.; desc. 48 ft. over NE. slope.

24.10 Wash, 10 lks. wide, course E.; over broken E. slope.

31.10 Wash, 10 lks. wide, course NE.; asc. 74 ft. over SE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

	$\frac{1}{4}$
S30	S29

1933

from which

A yellow pine, 24 ins. diam., bears S.34°E., 25 lks. dist., mkd.  $\frac{1}{4}$  S29 BT.

A yellow pine, 20 ins. diam., bears N.34°W., 15 lks. dist., mkd.  $\frac{1}{4}$  S30 BT.

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

## Chains

- Asc, 15 ft. over SE, slope.
- 45.30 Spur, slopes NE.; desc. 271 ft. over NW. slope.
- 54.70 Wash, 10 lks. wide, course NW.; asc. 25 ft. over SW. slope.
- 58.26 Intersect the N. end line (2-3 line) of the APEX patented lode claim, mineral survey No. 1626, at a point 80 lks. S.  $70^{\circ}30'E.$  of its cor. No. 2, which is a granite stone, 14 x 6 x 6 ins. above ground, mkd. 2 TV 2 A 1626, and witnessed as described in the official record. Leave patented mineral land.
- 59.60 Spur, slopes W.; desc. 392 ft. over NW. slope.
- 77.05 Wash, 10 lks. wide, course NW.; asc. 27 ft. over SW. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 19, 20, 29 and 30, with brass cap mkd.

T13N R1W	
S19	S20
S30	S29
1933	

from which

An oak, 8 ins. diam., bears N.  $62^{\circ}E.$ , 12 lks. dist., mkd.  
T13N R1W S20 BT.

An oak, 6 ins. diam., bears S.  $41^{\circ}E.$ , 47 lks. dist., mkd.  
T13N R1W S29 BT.

An oak, 7 ins. diam., bears S.  $47^{\circ}W.$ , 23 lks. dist., mkd.  
T13N R1W S30 BT.

A yellow pine, 18 ins. diam., bears N.  $35^{\circ}W.$ , 83 lks.  
dist., mkd. T13N R1W S19 BT.

Land: mountainous.

Soil: rocky, 4th rate.

Timber: oak, yellow pine, juniper and pinon.

Undergrowth: oak brush, manzanita and cacti.

- S.  $89^{\circ}56'E.$ , on random line, bet. secs. 20 and 29.
- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
- 79.96 A point 2 lks. S. of the cor. of secs. 20, 21, 28 and 29.
- Thence
- N.  $89^{\circ}57'W.$ , on true line, bet. secs. 20 and 29.
- Asc. 106 ft. over E. slope; through heavy pine, oak, pinon and juniper timber and medium undergrowth.
- 9.00 Spur, slopes NE.; continue ascent 108 ft. over NE. slope.
- 15.40 Spur, slopes N.; desc. 154 ft. over NW. slope.
- 22.60 Wash, 5 lks. wide, course N.; asc. 158 ft. over NE. slope.
- 35.00 Spur, slopes NE.; over N. slope, on level.
- 39.98 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

BOOK 4065

Chains

$$\frac{1}{4} \frac{S20}{S29}$$

1933

from which

An oak, 6 ins. diam., bears S.54°W., 50 lks. dist., mkd.  $\frac{1}{4}$  S29 BT.

A yellow pine, 10 ins. diam., bears N.83°W., 17 lks. dist., mkd.  $\frac{1}{4}$  S20 BT.

Desc. 34 ft. over NW. slope.

- 41.60 Old trail, bears NE. and SW.  
 43.50 Wash, 5 lks. wide, course N.; asc. 280 ft. over SE. slope.  
 60.00 Spur, slopes N.; over gradual NW. slope.  
 62.80 Wash, 10 lks. wide, course N.; asc. 22 ft. over NE. slope.  
 66.60 Ridge, bears N. and S.; saddle 1 ch. to N.; desc. 195 ft. over NW. slope.  
 75.00 Spur, slopes NW.; desc. 68 ft. over W. slope.  
 79.96 The cor. of secs. 19, 20, 29 and 30.

Land: mountainous.

Soil: rocky, 4th rate.

Timber: yellow pine, pinon, juniper, oak.

Undergrowth: oak brush, manzanita, cacti.

-----  
 West, on true line, bet. secs. 19 and 30.

Desc. 90 ft. over W. slope; through heavy pine, juniper, oak and pinon timber and medium undergrowth.

- 3.75 Wash, 5 lks. wide, course NW.; asc. 27 ft. over NE. slope.  
 6.20 Spur, slopes N.; desc. 66 ft. over NW. slope.  
 8.90 Old road, bears NE. and SW.  
 9.05 Wash, 10 lks. wide, course NE.; asc. 284 ft. over SE. slope.  
 18.50 Spur, slopes NE.; desc. 81 ft. over NW. slope.  
 22.95 Wash, 10 lks. wide, course NE.; asc. 156 ft. over SE. slope.  
 28.50 Spur, slopes NE.; desc. 204 ft. over NW. slope.  
 35.15 Wash, 5 lks. wide, course NE.; asc. 136 ft. over SE. slope.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground to bedrock, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$$\frac{1}{4} \frac{S19}{S30}$$

1933

from which

A yellow pine, 20 ins. diam., bears N.24°E., 21 lks. dist., mkd.  $\frac{1}{4}$  S19 BT.

RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.


Chains

A yellow pine, 8 ins. diam., bears S.55°W., 33 lks. dist., mkd. 1/2 S30 BT.

Over gentle SE. slope.

- 40.30 Spur, slopes NE.; desc. 132 ft. over NW. slope.
- 45.50 Wash, 10 lks. wide, course NE.; asc. 171 ft. over SE. slope.
- 54.00 Spur, slopes NE.; desc. 152 ft. over NW. slope.
- 59.40 Wash, 15 lks. wide, course NE.; asc. 47 ft. over SE. slope.
- 61.46 Intersect the E. bdy. of sec. 24, T.13 N., R.2 W.; at intersection

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. of secs. 19 and 30, with brass cap mkd.



1933

from which

An oak, 10 ins. diam., bears N.71 1/2°E., 20 lks. dist., mkd. T13N R1W S19 CC.BT.

An oak, 12 ins. diam., bears S.61°E., 20 lks. dist., mkd. T13N R1W S30 CC BT.

From point of intersection the cor. of secs. 24 and 25, only, hereinbefore described, bears S.2°34'E., 21.35 chs. dist.


Land: mountainous.  
 Soil: rocky, 4th rate.  
 Timber: pinon, oak and juniper, some yellow pine.  
 Undergrowth: oak brush, manzanita, and cacti.

-----

From the cor. of secs. 19, 20, 29 and 30,  
 N.0°02'W., bet. secs. 19 and 20.

Over gradual SW. slope; through heavy pine, oak, juniper and pinon timber and medium undergrowth.

- 5.00 Spur, slopes NW.; desc. 56 ft. over NE. slope.
- 7.50 Wash, 10 lks. wide, course NW.; asc. 45 ft. over SW. slope.
- 11.00 Change to W. slope.
- 22:80 Change to NW. slope; desc. 135 ft.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



from which

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

BOOK 4065

## Chains

A yellow pine, 16 ins. diam., bears N.60°E., 28 lks. dist., mkd.  $\frac{1}{4}$  S20 BT.

A yellow pine, 24 ins. diam., bears N.7°W., 137 lks. dist., mkd.  $\frac{1}{4}$  S19 BT.

Desc. 236 ft. over NW. slope.

54.40 Wash, 10 lks. wide, course NE.; asc. 13 ft. over SE. slope.

55.80 Road, bears NE. and SW.

60.10 Road, bears E. and W.

61.00 Spur, slopes NE.; desc. 41 ft. over NW. slope.

62.50 Road, bears E. and W.

64.00 Wash, 20 lks. wide, course NE.; asc. 54 ft. over SE slope.

71.60 Road, bears N. and SE.

73.10 Leave same, bears NW.

79.00 Spur, slopes NE.; over gradual NW. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground, and in a mound of stone to top, for cor. of secs. 17, 18, 19 and 20, with brass cap mkd.

T13NR1W	
S18	S17
S19	S20
1933	

from which

A yellow pine, 14 ins. diam., bears N.30°E., 22 lks. dist., mkd. T13N R1W S17 BT.

A yellow pine, 10 ins. diam., bears S.82°E., 42 lks. dist., mkd. T13N R1W S20 BT.

A yellow pine, 12 ins. diam., bears S.31°W., 7 lks. dist., mkd. T13N R1W S19 BT.

A yellow pine, 8 ins. diam., bears N.77°W., 11 lks. dist., mkd. T13N R1W S18 BT.

Land: mountainous.

Soil: rocky, 4th rate.

Timber: yellow pine, oak, juniper and pinon.

Undergrowth: oak brush, manzanita, and cacti.

S.89°57'E., on random line, bet. secs. 17 and 20.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.06 A point 16 lks. S. of the cor. of secs. 16, 17, 20 and 21.

Thence

S.89°56'W., on true line, bet. secs. 17 and 20.

Desc. 55 ft. over NW. slope; through heavy pine, juniper, oak and pinon timber and medium undergrowth.

2.50 Wash, 10 lks. wide, course NW.; over N. slope; asc. slightly.

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

## Chains

- 4.50 Change to NW. slope; desc. 60 ft.
- 8.30 Wash, 20 lks. wide, course NE.; a dam bears 60 lks. NE.
- 10.90 Wash, 10 lks. wide, course NE.; asc. 53 ft. over SE. slope.
- 16.40 Spur, slopes N.; desc. 28 ft. over NW. slope.
- 17.35 Road, bears S. to Walker and N. to Prescott.
- 23.25 Wash, 10 lks. wide, course NE.; asc. 92 ft. over SE. slope.
- 28.00 Spur, slopes N.; desc. 97 ft. over NW. slope.
- 31.40 Wash, 10 lks. wide, course N.; asc. 115 ft. over E. slope.
- 37.00 Spur, slopes N.; desc. 49 ft. over W. slope.
- 40.03 Set an iron post, 3 ft. long, 1 in. diam., 5 ins. in the ground, and in a mound of stone to top, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.
- $\frac{1}{4}$  S17  
 $\frac{1}{4}$  S20  
1933
- from which
- A juniper, 4 ins. diam., bears N.44°E., 26 lks. dist., mkd. BT.
- A juniper, 6 ins. diam., bears S.30°W., 52 lks. dist., mkd.  $\frac{1}{4}$  S20 BT.
- Desc. 29 ft. over W. slope.
- 41.00 Wash, 10 lks. wide, course N.; asc. 98 ft. over E. slope.
- 45.10 Spur, slopes N.; desc. 21 ft. over W. slope.
- 47.10 Wash, 5 lks. wide, course N.; asc. 40 ft. over NE. slope.
- 50.10 Spur, slopes N.; desc. 126 ft. over W. slope.
- 57.30 Road, bears NE. and SW.
- 58.15 Wash, 15 lks. wide, course NE.; asc. 161 ft. over SE. slope.
- 59.30 Road, bears N. and S.
- 76.55 Spur, slopes NE.; desc. 19 ft. over NW. slope.
- 78.15 Road, bears NW. and SE.
- 80.06 The cor. of secs. 17, 18, 19 and 20.
- Land: mountainous.  
Soil: rocky, 4th rate.  
Timber: yellow pine, oak, juniper, pinon.  
Undergrowth: oak brush, manzanita, cacti.
- 
- West, on true line, bet. secs. 18 and 19.
- Over gradual NW. slope; through heavy pine, oak, juniper and pinon timber and medium undergrowth.
- 1.50 Road, bears N. and S.; wash, 5 lks. wide, near head, course N.; asc. 308 ft. over NE. slope.



BOOK 4065

RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

Chains

17.00 Knoll, on spur, slopes NE.; desc. 135 ft. over NW. slope.

30.90 Wash, 5 lks. wide, course NE.; asc. 49 ft. over broken NE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.

1/4 S18  
1/4 S19

1933

from which

A yellow pine, 24 ins. diam., bears North, 55 lks. dist., mkd. 1/4 S18 BT.

A yellow pine, 10 ins. diam., bears S.39°W., 25 lks. dist., mkd. 1/4 S19 BT.

Asc. 105 ft. over broken NE. slope.

48.80 Spur, slopes SE.; over gradual SW. slope.

56.00 Wash, 5 lks. wide, course SE.; asc. 123 ft. over NE. slope.

62.00 Spur, slopes SE.; desc. 16 ft. over SW. slope.

65.01 Intersect the E. bdy. of sec. 13, T.13 N., R.2 W.; at intersection

Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for closing cor. of secs. 18 and 19, with brass cap mkd.

T13N | T13N  
R2W | S18 CC  
S13 | S19  
          | RLW

1933

from which

An oak, 10 ins. diam., bears N.71 1/2°E., 20 lks. dist., mkd. T13N RLW S18 CC BT.

An oak, 12 ins. diam., bears S.61°E., 34 lks. dist., mkd. T13N RLW S19 CC BT.

From point of intersection the cor. of secs. 13 and 24, only, hereinbefore described, bears S.2°34'E., 16.52 chs. dist.

Land: mountainous.

Soil: rocky, 4th rate.

Timber: yellow pine, juniper, oak, pinon.

Undergrowth: oak brush, manzanita, cacti.

-----  
From the cor. of secs. 17, 18, 19 and 20,

N.0°02'W., bet. secs. 17 and 18.

Desc. 72 ft. over NW. slope; through heavy pine, oak, juniper and pinon timber and medium undergrowth.

9.95 Wash, 10 lks. wide, course NE.; road in bottom bears NE. and SW.; over gradual SE. slope.

12.80 Spur, slopes E.; desc. 19 ft. over NE. slope.

RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

Chains

14.50 Wash, 10 lks. wide, course E.; road in bottom, bears E. and W.; asc. 45 ft. over SE. slope.

30.50 Spur, slopes NE.; desc. 65 ft. over NW. slope.

35.25 Wash, 5 lks. wide, course NE.; over gradual SE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



from which

A juniper, 6 ins. diam., bears S.79°E., 24 lks. dist., mkd. 1/4 S17 BT.

A juniper, 12 ins. diam., bears S.47°W., 83 lks. dist., mkd. 1/4 S18 BT.

Over gradual SE. slope.

43.50 Spur, slopes NE.; desc. 161 ft. over NW. slope.

65.70 Wash, 10 lks. wide, course NE.; asc. 19 ft. over SE. slope.

66.10 Old road, bears NE. and SW.

68.00 Spur, slopes E.; desc. 16 ft. over N. slope.

69.50 Wash, 5 lks. wide, course E.; over gradual SE. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 7, 8, 17 and 18, with brass cap mkd.



from which

An oak, 4 ins. diam., bears N.10°E., 35 lks. dist., mkd. BT.

A juniper, 6 ins. diam., bears S.84°E., 67 lks. dist., mkd. T13N RLW S17 BT.

A juniper, 4 ins. diam., bears S.60°W., 102 lks. dist., mkd. BT.

A yellow pine, 8 ins. diam., bears N.1°W., 445 lks. dist., mkd. T13N RLW S7 BT.

Land: mountainous and rolling.

Soil: rocky, 4th rate.

Timber: yellow pine, oak, pinon, juniper.

Undergrowth: oak brush, manzanita, cacti.

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T. 13 N., R. 1 W.

BOOK 4065

Chains	N. 89° 56' E., on random line bet. secs. 8 and 17.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.06	A point 5 lks. S. of the cor. of secs. 8, 9, 16 and 17.
	Thence
	S. 89° 54' W., on true line bet. secs. 8 and 17.
	Desc. 119 ft. over SW. slope; through heavy oak, juniper and pinon timber and dense undergrowth.
13.50	Lynx Creek, shallow stream 5 lks. wide in channel, 150 lks. wide, course NW.; over gradual NW. slope.
21.20	Fence, bears N. and S., on spur, slopes N.; over gradual NW. slope.
23.60	Wash, 10 lks. wide, course N.; over gradual N. slope.
24.00	House, bears S., 3.00 chs. dist.
28.60	Fence, bears N. and S.
29.65	Wash, 5 lks. wide, course NE.; asc. 113 ft. over SE. slope.
35.18	Line tree, a yellow pine, 30 ins. diam.
35.80	A spring, bears S., 3.00 chs. dist.
36.70	Over top of spur, from W., slopes NE.
40.03	Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S 8}{S 17}$
	1933
	from which
	An oak, 6 ins. diam., bears N. 38° E., 22 lks. dist., mkd. $\frac{1}{4}$ S8 BT.
	A yellow pine, 6 ins. diam., bears S. 40° E., 1 lk. dist., mkd. $\frac{1}{4}$ S17 BT.
	U.S. Geological Survey Bench Mark. Elev. 5557 ft., bears N. 3° 36' W., 30.52 chs. dist.
	The original $\frac{1}{4}$ sec. cor. of secs. 8 and 17, bears N. 28° 11' E., 8.57 chs. dist., a stone, mkd. $\frac{1}{4}$ , set in a mound of stone, witnessed by a pine, 24 ins. diam., 6 lks. N. I destroy the cor. and the marks on the old bearing tree.
	Asc. 198 ft. along general S. slope.
48.60	Wood road, bears NE. and W.
52.25	Road, bears S. to Walker and N. to Prescott.
64.00	Spur, slopes NE.; over N. slope, on level.
67.00	Spur, slopes N., desc. 137 ft. over NW. slope.
74.60	Wash, 10 lks. wide, course N.; asc. 86 ft. over SE. slope.
79.70	Spur, slopes NE.; desc. slightly over NW. slope.

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T. 13 N., R. 1 W.

Chains 80.06	<p>The cor. of secs. 7, 8, 17 and 18.</p> <p>Land, mountainous. Soil, rocky 4th. rate. Timber, oak, yellow pine, juniper and pinon. Undergrowth, oakbrush, manzanita and cacti.</p>
	<p>West, on true line bet. secs. 7 and 18.</p> <p>Desc. 73 ft. over NW. slope; through heavy oak, juniper pinon and yellow pine timber and medium undergrowth.</p>
5.85	Wash, 10 lks. wide, course NE.; asc. 124 ft. over SE. slope.
13.50	Spur, slopes NE.; road, bears NE. and SW.; over gradual NW. slope.
17.00	Head of wash, course NE.; asc. 167 ft. over SE. slope.
23.00	Spur, slopes NE.; over N. slope, on level.
28.00	Change to NW. slope; desc. 105 ft.
40.00	<p>Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground, and in a mound of stone to top, for <math>\frac{1}{4}</math> sec. cor., with brass cap mkd.</p> <p style="text-align: center;"> <math>\frac{1}{4}</math> <math>\frac{S 7}{S18}</math>  1933 </p> <p style="text-align: right;">from which</p> <p>An oak, 6 ins. diam., bears S.49°E., 128 lks. dist. mkd. <math>\frac{1}{4}</math> S18 BT.</p> <p>Over gentle E. slope.</p>
42.00	Change to NE. slope; asc. 249 ft.
58.00	Spur, slopes NE.; desc. 71 ft. over NW. slope.
66.00	Wash, 5 lks. wide, course NE.; asc. 83 ft. over SE. slope.
68.69	<p>Intersect the E. bdy. of secs. 12, T.13N., R.2W.; at intersection</p> <p>Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for closing cor. of secs. 7 and 18, with brass cap mkd.</p> <p style="text-align: center;"> T13N   T13N  R2W   S7 CC  S12   S18  RLW  1933 </p> <p style="text-align: right;">from which</p> <p>A pinon, 10 ins. diam., bears N.73½°E., 166 lks. dist., mkd. T13N RLW S7 CC BT.</p> <p>An oak, 6 ins. diam., bears S.17°E., 68 lks. dist. mkd. T13N RLW S18 CC BT.</p> <p>From point of intersection the cor. of secs. 12 and 13, only, hereinbefore described, bears S.2°34'E., 11.62 chs. dist.</p>

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

BOOK 4065

## Chains

Land: mountainous.  
 Soil: rocky, 4th rate.  
 Timber: oak, pinon, juniper, yellow pine.  
 Undergrowth: oak brush, manzanita, cacti.

From the cor. of secs. 7, 8, 17 and 18,  
 N.0°02'W., bet. secs. 7 and 8.

Desc. 95 ft. over NW. slope; through heavy pine, oak, pinon  
 and juniper timber and medium undergrowth.

- 7.75 Wash, 20 lks. wide, course NE.; over gentle SE. slope.  
 8.10 Old road, bears NE. and SW.  
 8.50 Toe of spur, slopes E.; over gentle NE. slope.  
 8.80 Wash, 5 lks. wide, course E.; road in bottom, bears E. and  
 W.; asc. 54 ft. over SE. slope.  
 16.50 Spur, slopes NE.; desc. 52 ft. over NW. slope.  
 23.35 Wash, 5 lks. wide, course NE.; asc. 33 ft. over SE. slope.  
 27.50 Spur, slopes E.; desc. 61 ft. over NE. slope.  
 31.35 Wash, 10 lks. wide, course SE.; asc. 50 ft. over SW. slope.  
 Road along N. side of wash, bears NW. and SE.  
 33.60 House bears W., 10 lks. dist.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$   
 S7 | S8  
 1933

from which

A yellow pine, 18 ins. diam., bears S.43°E., 59 lks.  
 dist., mkd.  $\frac{1}{4}$  S8 BT.

A juniper, 18 ins. diam., bears N.28°W., 85 lks. dist.,  
 mkd.  $\frac{1}{4}$  S7 BT.

Over gentle SE. slope.

- 40.60 Spur, slopes E.; desc. 10 ft. over NE. slope.  
 45.35 Wash, 5 lks. wide, course E.; asc. 10 ft.  
 46.60 Road, bears E. and W.  
 48.10 Road, bears NW. and SE.; saddle, in spur, slopes E.; desc.  
 17 ft. over N. slope.  
 50.45 Wash, 5 lks. wide, course SE.; asc. 32 ft. over SW. slope.  
 53.50 Spur, slopes E.; desc. 29 ft. over N. slope.  
 57.50 Wash, 5 lks. wide, course E.; asc. 54 ft. over SE. slope.  
 62.00 Spur, slopes E.; desc. 85 ft. over NE. slope.  
 69.20 Wash, 25 lks. wide, course E.; asc. 32 ft. over S. slope.

RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

Chains

- 71.50 Spur, slopes E.; desc. 14 ft.
- 72.60 Wash, 5 lks. wide, course E.° asc. 103 ft. over S. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground, and in a mound of stone to top, for cor. of secs. 5, 6, 7 and 8, with brass cap mkd.

T13NR1W  
 S6 | S5  
 S7 | S8  
 1933

from which

- A juniper, 20 ins. diam., bears N.81°E., 205 lks. dist., mkd. T13N R1W S5 BT.
  - A juniper, 18 ins. diam., bears S.67°W., 64 lks. dist., mkd. T13N R1W S7 BT.
  - A juniper, 24 ins. diam., bears N.48°W., 182 lks. dist., mkd. T13N R1W S6 BT.
- No other suitable trees available.

Land; mountainous and rolling.  
 Soil: rocky, 4th rate.  
 Timber: juniper, pinon, oak, yellow pine.  
 Undergrowth: oak brush, manzanita, cacti.

N.89°54'E., on random line, bet. secs. 5 and 8.

- 40.00 Set temp. 1/4 sec. cor.
  - 80.14 A point 5 lks. N. of the cor. of secs. 4, 5, 8 and 9.
- Thence
- S.89°56'W., on true line, bet. secs. 5 and 8.
- Over broken NE. slope; through heavy juniper, pinon, oak and pine timber and medium undergrowth.
- 2.00 Wash, 5 lks. wide, course NW.; asc. 46 ft. over NE. slope.
  - 9.50 Spur, slopes NW.; desc. 169 ft. over SW. slope.
  - 23.50 Lynx Creek, shallow stream, 5 lks. wide, in channel, 100 lks. wide, course NW.; asc. 115 ft. over NE. slope.
  - 24.55 Road, bears N. and S.
  - 40.07 Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in the ground, with a stone, 8 x 8 x 4 ins., mkd. X, deposited beside, and in a mound of stone to top, for 1/4 sec. cor., with brass cap mkd.

S5  
 1/4 S8  
 1933

No suitable bearing trees available.

- 40.15 Road, bears NW. and SE.; over rolling S. slope.

RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

BOOK 4063

- Chains
- 55.00 Wash, 5 lks. wide, course SE.; asc. 131 ft. over SE.slope.
- 60.30 Road, bears SW.to Walker and N. to Prescott.
- 63.64 Fence, bears NW. and SE.
- 68.40 House, bears S.11°W., about 7 chs. dist.
- 72.88 Fence, bears N. and S.
- 80.14 The cor. of secs. 5,6,7 and 8.

Land: rolling and mountainous.  
 Soil: rocky, 4th rate.  
 Timber: yellow pine, oak, juniper, pinon.  
 Undergrowth: oak brush, manzanita, cacti.

West, on true line, bet. secs. 6 and 7.

Desc. 16 ft. over gradual SW. slope; through scattering juniper, oak and pinon timber and dense undergrowth.

10.00 Wash, 5 lks. wide, course SE.; asc. 77 ft. over SE. slope.

17.00 Spur, slopes S., from W.; over top of same.

33.50 Leave spur, from SW.; over gradual NW. slope.

36.30 Wash, 5 lks. wide, course NE.; asc. 34 ft. over SE. slope

40.00 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground, and in a mound of stone to top, for 1/2 sec. cor., with brass cap mkd.

1/2 S6.  
 1/2 S7  
 1933

from which

A pinon, 8 ins. diam., bears S.50°E., 63 lks. dist., mkd. 1/4 S7 BT.

An oak, 5 ins. diam., bears N.56 1/2°W., 58 lks. dist., mkd. 1/2 S6 BT.

Asc. 288.ft. over SE. slope.

62.00 Spur, slopes NE.; desc. 113 ft. over NW. slope.

71.57 Intersect the E. bdy. of sec. 1, T.13 N., R.2 W.; at intersection

Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for closing cor. of secs. 6 and 7, with brass cap mkd.

T13N	T13N
R2W	S6 CC
S1	S7
	R1W

1933

from which

An oak, 9 ins. diam., bears N.26°E., 39 lks. dist., mkd. T13N R1W S6 CC BT.

A pinon, 5 ins. diam., bears S.39°E., 12 lks. dist., mkd. T13N R1W S7 CC BT.

## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T. 13 N., R. 1 W.

Chains	
	From point of intersection the cor. of secs. 1 and 12, only, hereinbefore described, bears S.0°22'W., 6.62 chs. dist.
	Land: mountainous. Soil: rocky, 4th rate. Timber: pinon, oak and juniper. Undergrowth: oak brush, manzanita and cacti.
	-----
	From the cor. of secs. 5, 6, 7 and 8.
	N.0°02'W., on true line, bet. secs. 5 and 6.
	Asc. 25 ft. over S. slope; through scattering oak, juniper and pinon timber and dense undergrowth.
3.00	Spur, slopes E.; desc. 138 ft. over NE. slope.
13.30	Road, bears E. and W.
16.90	Wash, 15 lks. wide, course E.; asc. 52 ft. over S. slope.
17.30	Road, bears E. and W.
24.00	Spur, slopes E.; desc. 45 ft. over NE. slope.
32.90	Wash, 5 lks. wide, course E.; asc. 38 ft. over SE. slope.
34.30	Old road, bears NW. and SE.
38.00	Spur, slopes E.; desc. 52 ft. over N. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4}$ ↑ S6   S5 ↓ 1933
	from which
	A juniper, 12 ins. diam., bears S.71°E., 38 lks. dist., mkd. $\frac{1}{4}$ S5 BT.
	A pinon, 12 ins. diam., bears S.42°W., 51 lks. dist., mkd. $\frac{1}{4}$ S6 BT.
	Desc. 20 ft. over N. slope.
40.70	Road, bears E. and W.
42.20	Wash, 20 lks. wide, course E.; asc. 20 ft. over S. slope.
44.70	Road, bears SE. to Walker and NW. to Prescott.
50.00	Spur, slopes E.; desc. 23 ft. over NE. slope.
53.30	Wash, 5 lks. wide, course NE.; asc. 23 ft. over SE. slope.
55.80	Toe of spur, slopes E.; desc. 13 ft.
58.60	Wash, 10 lks. wide, course SE.; road, bears E. and W.; asc. 70 ft. over SW. slope.
70.70	Spur, slopes SE.; desc. 14 ft. over N. slope.
72.50	Intersect the S. bdy. of sec. 31, T.14 N., R.1 W.; at intersection



## RESURVEY AND SURVEY OF SUBDIVISION LINES OF T.13 N., R.1 W.

Chains

Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground, and in a mound of stone to top, for closing cor. of secs. 5 and 6, with brass cap mkd.

T14N R1W  
 S31  
 S6 S5  
 T13N R1W  
 C C  
 1933

from which

A pinon, 8 ins. diam., bears S.58°E., 35 lks. dist., mkd. T13N R1W S5 CC BT.

A pinon, 10 ins. diam., bears S.13°W., 48 lks. dist., mkd. T13N R1W S6 CC BT.

From point of intersection the cor. of secs. 31 and 32, only, hereinbefore described, bears S.89°15'E., 7.53 chs. dist.

Land: rolling and mountainous.

Soil: rocky, 4th rate.

Timber: pinon, juniper and oak.

Undergrowth: oak brush, manzanita and cacti.

## TRACT SURVEYS IN T.13 N., R.1 W.

## Tract No.37

To accomodate Homestead Entry No.0737 of Carrie M. Pennington (nee Bishop), embracing the NE.  $\frac{1}{4}$  of the NW.  $\frac{1}{4}$  of sec. 6, T.13 N., R.1 W., patented May 3, 1911, -under the independent resurvey of the west half of T.13 N., R.1 W., described in the foregoing notes, -the position of that entry under the original survey is monumented as described in the following notes.

As a strictly dependent location of the entry, hereinafter described as Tract No.37, would, on account of the distortion of the old lines and the almost complete absence of old corners, together with the deficiency in area of the old survey, locate a position for the tract widely variant from normal and from the land presumed to be that area by the owner, the survey is made with cardinal courses and record distances from the N.  $\frac{1}{4}$  sec. cor. (old) of sec. 1, the only corner of the original survey found by the claimant. This position, as disclosed by preliminary retracements, agrees closely with that of the land claimed.

Beginning at the original  $\frac{1}{4}$  sec. cor. of secs. 6 and 31, on the N. bdy. of T.13 N., R.1 W., altered under this survey to refer to sec. 36, only, hereinbefore described, I locate a point on the S. bdy. of sec. 31 at the record departure from the  $\frac{1}{4}$  sec. cor., at which point I

Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, and in a mound of stone to top, for cor. No.1 of Tract 37, with brass cap mkd.

T14NR1W  
 S31  
 T13N COR1  
 R1W TR37  
 S6  
 1933

TRACT SURVEYS IN T. 13 N., R.1 W.

Chains

Thence

East, on true line, on N. bdy. of Tract 37.

12.99 The  $\frac{1}{4}$  sec. cor. of sec. 6, only, hereinbefore described.

20.00 The  $\frac{1}{4}$  sec. cor. of sec. 31, only, identical with cor. No. 2 of Tract 37, hereinbefore described.

Thence

South, on true line, on E. bdy. of Tract 37.

20.03 Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in the ground, and in a mound of stone to top, for cor. No. 3 of Tract 37, with brass cap mkd.

TR37  
COR3 S6  
T13NR1W  
1933

Thence

West, on true line, on S. bdy. of Tract 37.

20.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for cor. No. 4 of Tract 37, with brass cap mkd.

T13N TR 37  
R1W COR 4  
S6  
1933

Thence

North, on true line, on W. bdy. of Tract 37.

12.74 Cor. of fences, bear N. and E.

20.00 Intersect Cor. No. 1 of Tract 37, place of beginning.

TRACT NO. 38

To accommodate the IKE placer claim, entered Aug. 16, 1928, entry No. 062910, of Edward P. Moorhead, patented Dec. 17, 1929 (#1,033,122), embracing the W.  $\frac{1}{2}$  NW.  $\frac{1}{4}$  SW.  $\frac{1}{4}$  NE.  $\frac{1}{4}$  and W.  $\frac{1}{2}$  SW.  $\frac{1}{4}$  SW.  $\frac{1}{4}$  NE.  $\frac{1}{4}$  and SE.  $\frac{1}{4}$  NW.  $\frac{1}{4}$  SW.  $\frac{1}{4}$  NE.  $\frac{1}{4}$  and Lot 7, all in sec. 33, T. 13 N., R. 1 W., under the independent resurvey of the area, the claim is designated Tract No. 38. On account of the extensive obliteration of corner monuments of the original subdivisional survey of the Tp., the survey of Tract 38 is initiated from the original std. cor. of secs. 32 and 33, on the S. bdy. of the Tp., as suggested in the special instructions for Group 157, and surveyed as if sec. 33 were a full and regular section.

At a point 40.00 chs. East and 60.00 chs. North of the original std. cor. of secs. 32 and 33, hereinbefore described,

Set an iron post, 3 ft. long, 1 in. diam., 9 ins. in the ground, and in a mound of stone to top, for cor. No. 1

## TRACT SURVEYS IN T.13 N., R.1 W.

BOOK 4083

Chains

of Tract 38, with brass cap mkd.

S33  
 TR 38  
 COR 1  
 1933

Thence

East, on true line, on N. bdy. of Tract 38.

- 5.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, and in a mound of stone to top, for cor. No.2 of Tract 38, with brass cap mkd.

S33  
 TR 38  
 COR 2  
 1933

Thence

South, on true line, on E. bdy. of Tract 38.

- 1.70 Road, bears N.20°E. and S.20°W.

- 5.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, and in a mound of stone to top, for cor. No.3 of Tract 38, with brass cap mkd.

S33  
 COR 3  
 TR 38  
 1933

Thence

East, on true line, on N. bdy. of Tract 38.

- 5.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for cor. No.4 of Tract 38, with brass cap mkd.

S33  
 TR 38  
 COR 4  
 1933

Thence

South, on true line, on E. bdy. of Tract 38.

- 1.00 Lynx Creek, stream 8 lks.wide, 4 ins. deep, in channel, 120 lks. wide, course NE.
- 5.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, with a stone mkd. X deposited at base, and in a mound of stone to top, for cor. No.5 of Tract 38, with brass cap mkd.

TR 38  
 COR 5  
 S33  
 1933

Thence

## TRACT SURVEYS IN T.13 N., R.1 W.

Chains

West, on true line, on S. bdy. of Tract 38.

5.00 E. bank of Lynx Creek, bears NE. and SW.

5.00 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground, and in a mound of stone to top, for cor. No.6 of Tract 38, with brass cap mkd.

TR 38  
COR 6  
S33  
1933

Thence

South, on true line, on E. bdy. of Tract 38.

Asc. 122 ft. over NW. slope.

10.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for cor. No.7 of Tract 38, with brass cap mkd.

TR 38  
COR 7  
S33  
1933

Thence.

West, on true line, on S. bdy. of Tract 38.

Desc. 105 ft. over NW. slope.

9.20 Lynx Creek, stream, 10 lks. wide, 4 ins. deep, in channel, 130 lks. wide, course NE.

10.05 Road, bears N.20°E. and S.20°W.

10.31 Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in the ground, and in a mound of stone to top, for cor. No.8 of Tract 38, with brass cap mkd.

TR  
38  
COR 8  
S33  
1933

Cor. stands on the SE. side line of the YELLOW DOG patented lode claim, mineral survey No. 4031, at a point 15.58 chs. N.17°12'E. of its cor. No. 4, which is a stone, 16 x 9 x 6 ins. above ground, firmly set, and mkd. and witnessed as described in the official record.

Thence (from cor. No.8)

N.17°12'E., on W. bdy. of Tract 38.

7.15 Intersect Cor. No.3 of the YELLOW DOG patented lode claim, mineral Survey No. 4031, a stone, 14 x 12 x 10 ins. above ground, firmly set, and mkd. and witnessed as described in the official record. Beside the stone

Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground, supported in a mound of stone, for cor. No.9 of Tract 38, with brass cap mkd.

## TRACT SURVEYS IN T. 13 N., R.1 W.

BOOK 4035


Chains



Thence

N.80°00'W., on true line, continuing bdy. of Tract 38 along the N. end line (2-3 line) of the YELLOW DOG claim.

- 1.82 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, and in a mound of stone to top, for cor. No.10 of Tract 38, with brass cap mkd.




The N. center end of the YELLOW DOG claim bears N.80°00'W., 2.72 chs. dist., an unmarked stone set in a mound of stone.

Thence (from cor. No.10)

North, on true line, on W. bdy. of Tract 38.


- 2.80 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, and in a mound of stone to top, for cor. No.11 of Tract 38, with brass cap mkd.



Thence

East, on true line, on N. bdy. of Tract 38.

- 5.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for cor. No.12 of Tract 38, with brass cap mkd.



Nearest corner of house bears N.60°E., 67 lks. dist.  
Well bears N.60°E., 110 lks. dist.

Thence ( from cor. No.12)

North, on true line, on W. bdy. of Tract 38.

- 0.50 Road, bears N.20°E. and S.20°W.  
10.00 Cor. No. 1, place of beginning.

FINAL TEST of Buff Transit  
No. 18000 by  
Benjamin J. Kinsey, U.S. Surveyor.

October, 8, 1933: at my station in the SW $\frac{1}{2}$  of sec. 5, T. 13 N., R. 1 W., G. & S. R. B. & M., Arizona, in approximate longitude  $112^{\circ}22\frac{1}{2}'$  W., and latitude  $34^{\circ}32\frac{1}{2}'$  N., at 6h. 36m., a.m., l.m.t., observe Polaris at western elongation, making four observations, two each with the telescope in direct and reversed positions, marking the mean point in the line thus determined by a tack set in top of a stake, driven firmly in the ground about 5 chs. N.

Azimuth of Polaris at western elongation:  $1^{\circ}17'$ .

At 8h. 30m., a.m., app. t., lay off the azimuth of Polaris  $1^{\circ}17'$  to the east and mark the meridian thus determined by a tack set in top of a peg driven firmly in the ground about 5 chs. N.

At 9h. 00m., a.m., app. t., set off  $34^{\circ}32\frac{1}{2}'$  N., on lat. arc,  $14^{\circ}22'$  S. on decl. arc and determine a meridian with the solar which agrees with the true meridian.

At 12h. 00m., app. noon, with lat. arc unchanged observe the sun on the meridian; the resultant reading of the decl. arc is  $14^{\circ}24'$  S., which agrees with the computed declination of the sun.

At 3h. 00m., p.m., app. t., with lat. arc unchanged, set off  $14^{\circ}26'$  S., on decl. arc and determine a meridian with the solar which agrees with the true meridian.

All of the observations giving results within 1' of the true meridian conclude that the instrument is in a satisfactory state of adjustment.

## GENERAL DESCRIPTION.

**Land:** chiefly rough mountainous with some rolling, hilly land in the north central part. The elevation above sea level ranges from about 7,700 atop Spruce Mountain in sec. 31 to 4,800 ft. in sec. 5.

The drainage on the eastern slope is into the Agua Fria River as is also the greater part of the remainder of the township via Lynx Creek. The southwestern corner drains into the Hassayampa River.

**Soil:** rocky 3rd. and 4th. rate on slopes, of granite formation. Bordering some of the larger washes and creeks are marginal strips of better soil, a black sandy loam of 2nd. rate quality, with average depth of 2 ft. to bedrock.

**Timber:** the higher elevations are covered with a heavy growth of yellow pine, spruce, oak, and juniper while the slopes and washes of lesser altitude are covered with scattered and heavy timber of the oak and pinion variety.

**Undergrowth:** consists of a general dense growth of oakbrush, manzanita, laurel, mahogany and varieties of cactus growth. Along the western part the oakbrush and manzanita form jungle like thickets on the higher slopes.

**Roads:** one first class road penetrates the central part of the township, being the road from Prescott-to-Walker, a postoffice and cluster of buildings, sparsely inhabited which lies along the South bdy. of sec. 33. Other roads of poorer class extend to nearly every other part of the township. Trails also lead to the more remote portions.

**Water:** at the time of survey was restricted, good water in this township was found only at wells in secs. 8, 12, in the Walker region in sec. 33, at developed points in secs. 25, at the Chaparral and Union Mine areas, and small spring in sec. 29. The best water in this township is found at a living spring in sec. 22, on unpatented tho improved mining property. Lynx Creek carries a stream of water usually but due to the vast amount of mining work done in this region during past years the water in same is unfit for domestic use. At the time of survey the drought in Arizona had not been broken and the only washes carrying water were those in secs. 22, 28, and 29, these emptying into Lynx Creek.

**Industry:** while stock grazing is permitted on a small scale in the township, the principal industry present was that of mining; however outside of the activities in the S.E. cor. of township, only placer work was going on and this along Lynx Creek.

**Settlement:** a settler has holdings in sec. 8; a metes & bounds survey in sec. 6 embraces land belonging to an owner living in sec. 31, T.14 N., R.1 W., and is being used for grazing purposes. Outside the settlement attributed to the mining work being carried on none other is present on any scale.

**General:** the lands are all within the Prescott National Forest Reserve, which Service has a tall fire tower on Spruce Mtn. in sec. 31.

4-680  
(August, 1926)

**FIELD ASSISTANTS.**

NAMES.	CAPACITY.
Herman Shafer	1st Chainman
Bert E. Wakeman	1st Chainman
Elliott Pearson	1st Chainman
Howard Osborn	2nd Chainman
John Boggs	2nd Chainman
Albert Green	2nd Chainman
George McEnnis	Moundsman
Morris Massey	Moundsman
John Boggs	Moundsman
Albert Green	Axeman
H.A. Weedon	Axeman
Wayne Yates	Axeman
Clair Pearson	Flagman
J.M. Champie	Flagman
Wayne Yates	Flagman



CERTIFICATE OF UNITED STATES SURVEYOR

BOOK 4065

I, Benjamin J. Kinsey, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Arizona bearing date of the 16th day of April, 1930, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, ~~resurveyed~~ all those parts or portions of the Gila and Salt River Meridian in T. 13 N., 3rd Standard Parallel North in R. 1 W., South bdy. of T. 14 N., R. 1 W., West bdy. and Subdivision lines of T. 13 N., R. 1 W.; and surveyed all those parts or portions of Tracts Nos. 37 and 38, and Subdivision lines of

Township 13 North, Range 1 West of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of ~~said resurvey~~ <sup>said</sup> survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such ~~resurvey~~ and survey.

Phoenix, Arizona  
February 11, 1935

*Benjamin J. Kinsey*  
U. S. Surveyor.

APPROVAL

OFFICE OF U. S. SUPERVISOR OF SURVEYS,  
Denver, Colorado, May 3, 1935.

The foregoing field notes of the ~~resurvey~~ of G. & S. R. Meridian in T. 13 N., 3rd Std. Parallel N. in R. 1 W., South bdy. of T. 14 N., R. 1 W., West bdy. and Part of Subdivision Lines of T. 13 N., R. 1 W.; and of the survey of Tract No. 37 and Tract No. 38, and part (completion) of Subdivision lines of

Township 13 North, Range 1 West of the Gila and Salt River Base and Meridian in the State of Arizona executed by Benjamin J. Kinsey, U. S. Surveyor under his special instructions dated April 16, 1930, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the ~~resurveys~~ <sup>and surveys</sup> they describe, are hereby approved.

*Wm. H. Johnson*  
U. S. Supervisor of Surveys.

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~  
~~has been correctly copied from the original notes on file in this office.~~

~~U. S. Supervisor of Surveys.~~