

FIELD NOTES

OF THE RESURVEY OF

The SOUTH BOUNDARY of Township 6 North, Range 2 East

The EAST BOUNDARY of Township 6 North, Range 2 East, and

The EAST BOUNDARY of Township 6 North, Range 1 East

AND OF THE SURVEY OF

The SUBDIVISION LINES of

Township 6 North, Range 2 East

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

Benjamin J. Kinsey, U. S. Surveyor

In the capacity of U. S. Surveyor, under Special Instructions dated August 31, 1933, issued by the District Cadastral Engineer to govern surveys included in Group No. 186, Arizona, which were approved by the Commissioner of the General Land Office, September 22, 1933, and Assignment Instructions dated November 21, 1933

Resurvey & Survey commenced December 3, 1933

Resurvey & Survey completed December 28, 1933

4068

4068

INDEX DIAGRAM.


Township _____, Range _____

| | | | | | |
|----|----|----|----|----|----|
| 6 | 5 | 4 | 3 | 2 | 1 |
| 7 | 8 | 9 | 10 | 11 | 12 |
| 13 | 17 | 16 | 15 | 14 | 13 |
| 19 | 20 | 21 | 22 | 23 | 24 |
| 20 | 25 | 26 | 27 | 28 | 25 |
| 21 | 22 | 23 | 24 | 25 | 26 |

GOVERNMENT PRINTING OFFICE

~INDEX-DIAGRAM~


BOOK 4068

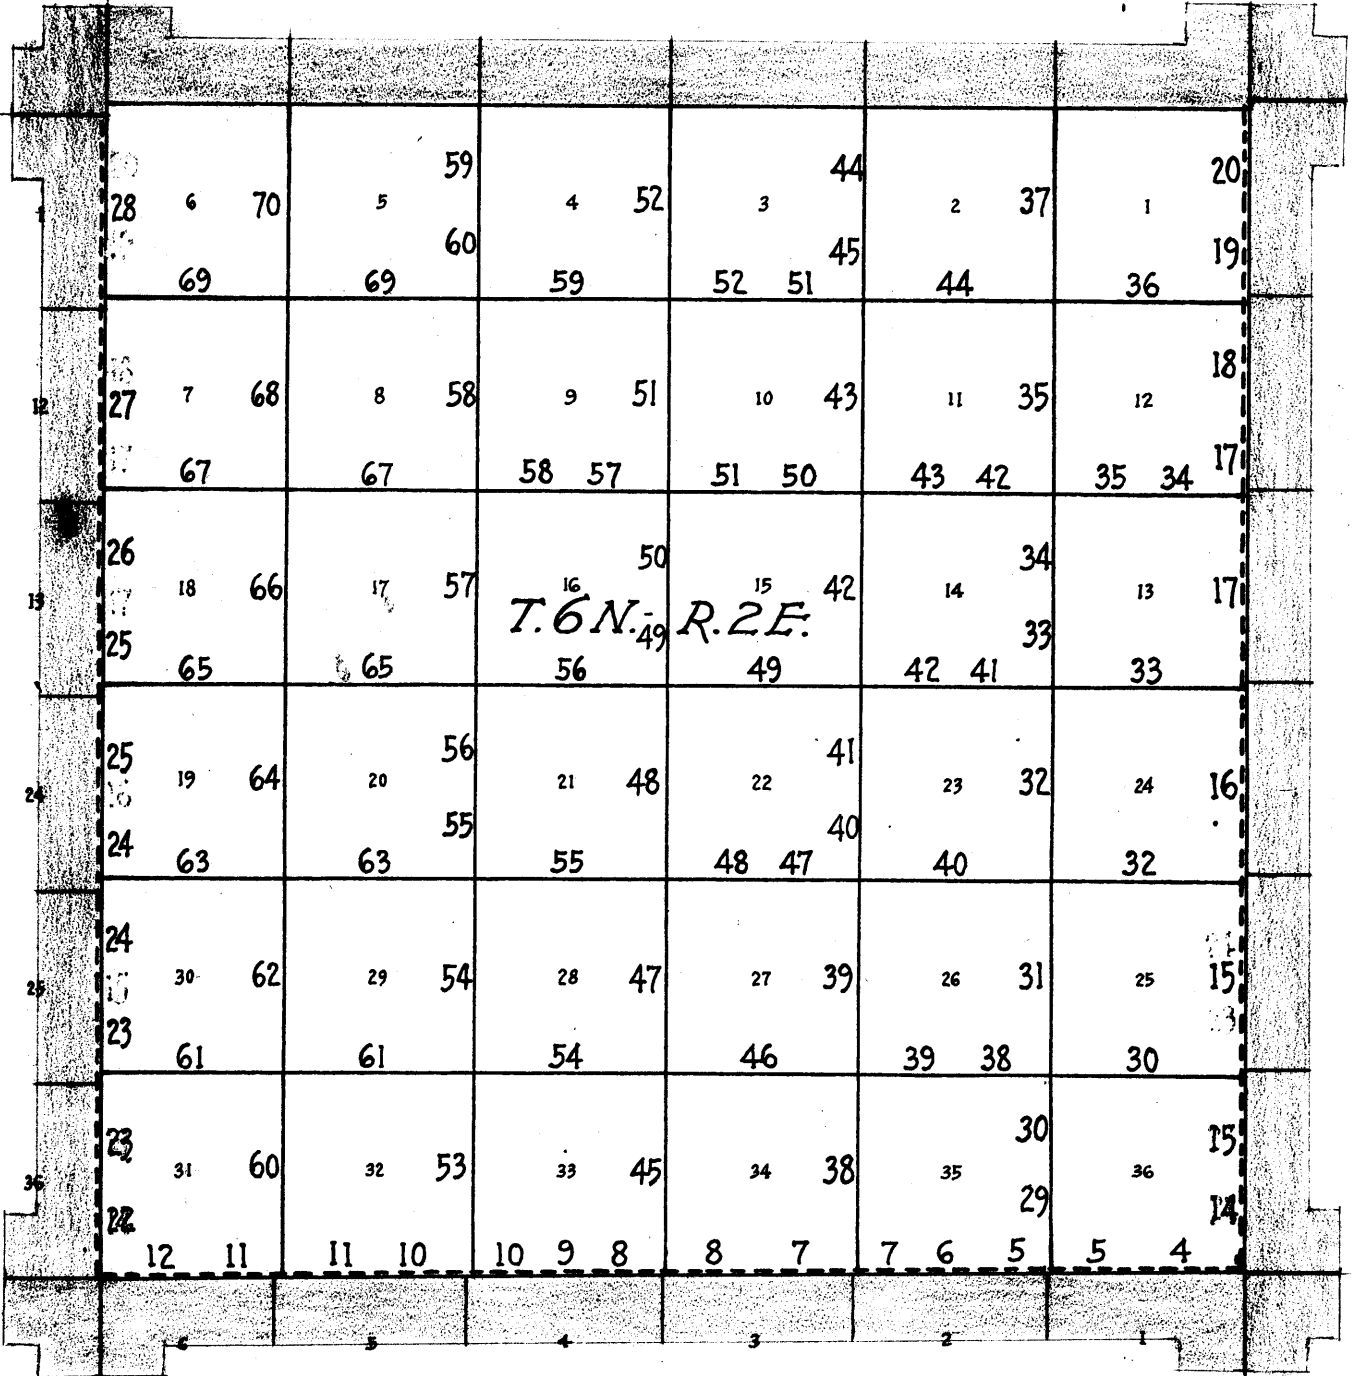

— Accepted Surveys.

- - - Resurveyed under this group.

 Surveyed under this group.

 Areas surveyed as per accepted plats on file.

The resurveys and surveys hereinafter described were executed by Benjamin J. Kinsey, U.S. Surveyor, using Buff transit No. 18,000. The instrument is equipped with the Smith solar attachment and otherwise conforms to the standard requirements of the General Land Office. The instrument was examined and approved by the District Cadastral Engineer, for Arizona and California, prior to the surveys, conditional upon a satisfactory field test.

PRELIMINARY FIELD TEST
of
Buff transit No. 18,000
by
Benjamin J. Kinsey, U.S. Surveyor.

Dec. 3, 1933, at my station about 20 chs. west of the $\frac{1}{2}$ sec. cor. of secs. 33 and 34, T.6 N., R.2 E., G. and S.R.B. and M., in latitude $33^{\circ}48'N.$, as determined by the mean of altitude observations on the sun on Dec. 4, 1933, hereinafter described, and longitude $112^{\circ}09'W.$, examine the adjustments of the transit and find no appreciable errors. I then test the solar apparatus by comparing its indications hourly with the true meridian established by Polaris observation, as follows:

Dec. 4: at same station as above described, at 2h.47m., a.m., l.m.t., observe Polaris at western elongation, making four observations, two each with the telescope in direct and reversed positions, and marking the mean point in the line thus determined by a tack set in top of a peg, driven firmly in the ground about 5 chs. N.

Azimuth of Polaris at western elongation: $1^{\circ}15'30''$

Daylight; lay off the azimuth of Polaris, $1^{\circ}15'30''$ E. and mark the meridian thus determined with a tack set in top of a peg, driven firmly in the ground about 5 chs. N.

At 9h.00m., a.m., app.t., with lat. arc set at $33^{\circ}48'N.$ and declination arc set at $22^{\circ}13'S.$, determine a meridian with the solar which agrees with the true meridian.

At 12h.00m., app. noon, with lat. arc unchanged, observe the sun on the meridian; the resultant reading of the decl. arc is $22^{\circ}14'S.$, which agrees with the computed declination of the sun.

At 3h.00m., p.m., app.t., with lat. arc unchanged, set off $22^{\circ}15'S.$ on declination arc and determine a meridian with the solar which agrees with the true meridian.

As all of the observations taken during the usual hours of solar work agree within $1'$ of the true meridian conclude that the instrument is in a satisfactory state of adjustment.

The measurements are made on the slope, the vertical angle determined, and slope measurements properly reduced to true horizontal distances for entry in the field tablets.

All measurements are made with a Lufkin steel tape 5-chains in length, compared with a Lufkin standard and found correct.

Meridian Observations for Time and Latitude,

by

Benjamin J. Kinsey, U.S. Surveyor.

Using

Buff transit No. 18,000.

Dec. 4, 1933, at same station as described on page 1 hereof, in approximate latitude $33^{\circ}48'N.$, and longitude $112^{\circ}03'W.$, I make a meridian observation of the sun for time and latitude, observing simultaneously the altitude of the sun's lower limb, and the transit of the sun's west limb, reversing the telescope and observing simultaneously the altitude of the sun's upper limb and the transit of the sun's east limb:

Sun's position.

Direct:



Reversed:



Mean observed altitude: $33^{\circ}58'15''$

Reduced latitude: $33^{\circ}47'10''$

Mean watch time of obsn.: 12h. 24m., 50s.

Watch fast of l.m.t.: 34m. 31s.

RESURVEY OF S. BDY. OF T. 6 N., R. 2 E.

BOOK 4068

Chains

The S. bdy. of T. 6 N., R. 2 E., was surveyed in 1894 by J. H. Martineau, U. S. D. S., establishing common reference corners thereon at 40.00 ch. intervals, counting from the east.

No retracement or resurvey of any part of this line is of record. The following notes describe a resurvey of the entire line, reestablishing all missing corners by proportional measurement between existing cors. and reconstructing said existing cors. with altered reference to areas S. of line only. At intervals of 40 chs. in departure, counting from the east, corners are established referring to areas N. of line only.

Retracement for Resurvey.

From the cor. of Ts. 5 and 6 N., Rs. 2 and 3 E.,

S. $89^{\circ}52'W.$, on a random line, bet. secs. 1 and 36.

40.00 No evidence found of the original $\frac{1}{4}$ sec. cor.; set temp. cor. Continue line and measurement.

80.00 No evidence found of the original cor. of secs. 1, 2, 35 and 36.; set temp. cor. Continue line and measurement; bet. secs. 2 and 35, ($E\frac{1}{2}$)

120.66 A point 151 lks. N. of the original $\frac{1}{4}$ sec. cor. of secs. 2 and 35.

True course and dist.; S. $89^{\circ}09'W.$, 120.66 chs., which, to maintain original proportion bet. cor. intervals gives three intervals of 40.22 chs. each for the reestablishment of the missing cors.

Thence,

S. $89^{\circ}52'W.$, on a random line, bet. secs. 2 and 35, ($W\frac{1}{2}$)

40.05 A point 5 lks. S. of cor. of secs. 2, 3, 34 and 35.

True course and dist.: S. $89^{\circ}56'W.$, 40.05 chs.

S. $89^{\circ}52'W.$, on a random line, bet. secs. 3 and 34, ($E\frac{1}{2}$)

40.18 A point 8 lks. N. of the $\frac{1}{4}$ sec. cor. of secs. 3 and 34.

True course and dist.; S. $89^{\circ}45'W.$, 40.18 chs.

Thence,

S. $89^{\circ}52'W.$, on a random line, bet. secs. 3 and 34, ($W\frac{1}{2}$).

40.10 A point 9 lks. S. of cor. of secs. 3, 4, 33 and 34.

True course and dist.; West, 40.10 chs.

S. $89^{\circ}52'W.$, on a random line, bet. secs. 4 and 33, ($E\frac{1}{2}$).

34.94 A point 246 lks. N. of the $\frac{1}{4}$ sec. cor. of secs. 4 and 33.

True course and dist.; S. $85^{\circ}50'W.$, 35.03 chs.

Thence,

S. $89^{\circ}52'W.$, on a random line, bet. secs. 4 and 33, ($W\frac{1}{2}$).

RESURVEY OF THE S. BDY. OF T. 6 N., R. 2 E.

chains

40.00

A point 9 lks. S. of the cor. of secs. 4, 5, 32 and 33.
True course and dist.: West, 40,00 chs.

S.89°52'W., on a random line, bet. secs. 5 and 32. ($E\frac{1}{2}$).

40.20

A point 5 lks. N. of the $\frac{1}{4}$ sec. cor. of secs. 5 and 32.
True course and dist.: S.89°48'W., 40,20 chs.

Thence,

S.89°52'W., on a random line, bet. secs. 5 and 32. ($W\frac{1}{2}$).

40.23

A point 5 lks. N. of cor. of secs. 5, 6, 31 and 32.
True course and dist.: S.89°48'W., 40,23 chs.

S.89°52'W., on a random line, bet. secs. 6 and 31. ($E\frac{1}{2}$).

40.18

A point 1 lk. S. of the $\frac{1}{4}$ sec. cor. of secs. 6 and 31.
True course and dist.: S.89°53'W., 40,18 chs.

Thence,

S.89°52'W., on a random line, bet. secs. 6 and 31. ($W\frac{1}{2}$).

39.70

A point 2 lks. N. of cor. of Ts. 5 and 6 N., Rs. 1
and 2 E.
True course and dist.: S.89°50'W., 39,70 chs.

RESURVEY.

The cor. of Ts. 5 and 6 N., Rs. 2 and 3 E. is a sandstone 6x4x14 ins. above ground, firmly set, marked and witnessed as described in the official record.

From corner,

S.89°09'W., on true line, on S. bdy. of sec. 36.

Over mountainous land, through scattering timber and dense undergrowth.

Desc. gradual NW. slope.

3.90

Wash, 10 lks. wide, course N.; asc. 268 ft. over NE. slope.

27.20

Spur, slopes N., desc. 280 ft. over W. slope.

40.00

Set an iron post 3 ft. long, 1 in. diam., 14 ins in the ground to bedrock, with a stone 6x6x8 ins. marked with

RESURVEY OF THE S. BDY. of T. 6 N., R. 2 E.

BOOK 4068

chains

with a cross (+) deposited at base, and in a mound of stone to top for $\frac{1}{4}$ sec. cor. of sec. 36 only, with brass cap marked

 $\frac{1}{4}$ S 36

1933

No suitable bearing trees available.

40.22 Set an iron post 3 ft long, 1 in. in diam., 14 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 1, only, with brass cap marked

 $\frac{1}{4}$ S 1

1933

No suitable bearing trees available.

Desc. 97 ft. over W. slope.

47.50 Wash, 15 lks. wide, 6 ft. deep, course NW. Thence along NE. slope.

53.00 Low spur, slopes N.; desc. 32 ft. over NW. slope.

59.20 Wash, 10 lks. wide, course N.; asc. 40 ft. over NE. slope.

66.00 Spur, slopes NW.; desc. 104 ft. over SW. slope.

79.00 Set an iron post 3 ft long, 2 ins. in diam., 27 ins. in the ground, for witness corner of secs. 35 and 36, only, with brass cap marked

T6NR2E
WC S35|S36
S1
T5NR2E
1933

of stone 4 ft. base, 2 ft. high, N. of cor. raise a mound

79.80 Center of East channel of Skunk Creek, wash, 170 lks. wide, 6 ft. deep, course SW.

80.00 True point for cor. of secs. 35 and 36, falls in East channel of Skunk Creek, where it is impracticable to monument the corner; establish witness cor. as hereinbefore described.

Land, mountainous.
Soil, rocky, 4th rate.
Timber, palo verde, mesquite, and ironwood.
Undergrowth, greasewood, catclaw, ocotillo and cacti.

From true point for cor. of secs. 35 and 36,


S. 89°09'W., on true line, on S. bdy. of sec. 35. Over rolling land, through scattering timber & undergrowth. Across stony bottom of E. channel of Skunk Creek, 70 lks. wide, course SW.

RESURVEY OF THE S. BDY. OF T. 6 N., R. 2 E.

chains

0.44 True point for cor. of secs. 1 and 2, only, falls in E. channel of Skunk Creek, where it is impracticable to monument the cor.; establish witness cor. as follows:

1.94 Set an iron post 3 ft long, 2 ins. in diam., 28 ins. in the ground, for witness cor. for secs. 1 and 2, only, with brass cap marked



1933


raise a mound of stone, 4 ft. base, 2 ft high S. of cor.

Thence over level land, bet. channels of Skunk Creek, course SW.

10.70 Center of West channel of Skunk Creek, 70 lks. wide, 6 ft. deep., course SW. Thence over rolling land.

31.30 Road, bears NE. and SW.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., on bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for 1/4 sec. cor., of sec. 35, only, with brass cap marked




1933

No suitable bearing trees available.

40.66 Intersect the original 1/4 sec. cor. of secs. 2 and 35, which is a sandstone 4x6x9 ins. firmly set, marked and witnessed as described in the official record.

Reconstruct this cor. monument and alter its reference as follows:

Alongside the original cor. stone, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor. of secs 2, only, with brass cap marked



1933

from which,

A palo verde, 4 ins. in diam., bears S.6°W., 5 lks. dist. marked 1/4 S2 BT

No other bearing tree available.

Thence

S.89°56'W., on true line, continuing measurement.

48.66 Low spur, slopes SW. Thence over gradual SW. slope.

60.16 Wash, 15 lks. wide, 8 ft. deep. course SW. Thence over rolling SW. slope.

63.66 Low spur, slopes SW.

RESURVEY OF S. BDY. OF T. 6 N., R. 2 E.

BOOK 4068

| | |
|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| chains | |
| 68.66 | Wash, 10 lks. wide, course SW. |
| 80.00 | Set an iron post, 3 ft. long, 2 ins. in diam., 16 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 34 and 35, only, with brass cap marked |
| | T6NR2E S34 S35 S2 T5NR2E 1933 |
| | This cor. is situated on top of a low spur, slopes S. |
| | Land, rolling; Soil, rocky, 4th rate. Timber, palo verde, mesquite, and ironwood. Undergrowth, greasewood, catclaw, ocotillo and cactus. |
| | S.89°56'W., on true line, on S. bdy. of sec. 34. Over rolling land, through dense undergrowth. |
| 0.71 | Intersect the original cor. of secs. 2, 3, 34 and 35, which is a sandstone 6x10x10 ins. above ground, firmly set, marked and witnessed as described in the official record. |
| | Reconstruct this cor. monument and alter its reference as follows: |
| | Alongside the original corner stone, set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, with a stone 6x6x8 ins., marked with a cross (+) deposited at base, and in a mound of stone to top for cor. of secs. 2 and 3 only, with brass cap marked |
| | T6NR2E S34 S3 S2 T5N 1933 |
| | Thence, |
| | S.89°45'W., on true line, continuing measurement. |
| | Desc. 23 ft. over NW. slope. |
| 6.51 | Wash, 5 lks. wide, course SW. |
| 12.21 | Black Canyon highway, bears NW. and SE. |
| 15.86 | Telephone line, bears N.40½°W., and S.40½°E. |
| 19.86 | Power line, bears N.40½°W., and S.40½°E. |
| 23.31 | Wash, 10 lks. wide, 4 ft. deep, course SE.; asc. 58 ft. over SE. slope of malpais hill. |
| 40.00 | Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 6x6x8 ins., marked with a cross (+) deposited at base, and in a mound of |

RESURVEY OF THE S. BDY. OF T. 6N., R. 2 E.

chains

stone to top, for $\frac{1}{4}$ sec. cor. of sec. 34, only, with
brass cap marked

$\frac{1}{4}$ S34

1933

40.89 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 3 and 34,
which is a malpais stone 16x16x10 ins., firmly set,
marked and witnessed as described in the official record.

Reconstruct this cor. monument and alter its reference
as follows:

Alongside the original cor. stone, set an iron post, 3 ft.
long, 1 in. in diam., 10 ins. in the ground to bedrock,
and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec.
3, only, with brass cap marked

$\frac{1}{4}$ S3

1933

Thence,

West, on true line, continuing measurement.

Asc. 192 ft. over NE. slope.

68.90 Saddle in spur, slopes SE.; asc. 61 ft. over S. slope of
malpais hill.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in
the ground, for cor. of secs. 33 and 34, with brass cap
marked

T6NR2E
S33 S34

T5NR2E S3

1933

of stone, 4 ft. base, 2 ft. high, W. of cor. raise a mound

Land, rolling and mountainous.

Soil, rocky, 4th rate.

Timber, none.

Undergrowth, greasewood, catclaw, ocotillo and cacti.

West, on true line, on S. bdy. of sec. 33.

Over mountainous land, through scattering timber and
dense undergrowth.

0.99 Intersect the original cor. of secs. 3, 4, 33 and 34,
which is a malpais stone 6x12x16 ins. above ground,
firmly set, marked and witnessed as described in the
official record.

Reconstruct this corner monument and alter its reference
as follows:

Alongside the original cor. stone, set an iron post, 3 ft.
long, 2 ins. in diam., 18 ins. in the ground to bedrock,
and in a mound of stone to top, for cor. of secs. 3 and 4,

RESURVEY OF THE S. BDY. OF T. 6 N., R. 2 E.

BOOK 4068

chains

only, with brass cap marked

T6NR2ES34

| | |
|-----|-----|
| S4 | S3 |
| T5N | R2E |

1933

No suitable bearing trees available.

Thence,

S.85°50'W., on true line, continuing measurement.

Asc. 50 ft. along SE. slope.

6.90 Top of ascent, desc. 344 ft. over rocky SW. slope.

✓36.02 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 4 and 33, which is a malpais stone 6x8x10 ins. above ground, firmly set, marked and witnessed as described in the official record.

Reconstruct this cor. monument and alter its reference as follows:

Alongside the original cor. stone, set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 4, only, with brass cap marked

 $\frac{1}{4}$ S4

1933

No suitable bearing trees available.

Thence,

West, on true line, continuing measurement

Desc. 35 ft. over SW. slope.

✓40.09 (40.00 chs. in departure); set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, with a stone 6x6x8 ins., marked with a cross (+) deposited at base; and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 33, only, with brass cap marked

 $\frac{1}{4}$ S.33

1933

No suitable bearing trees available.

Desc. 32 ft. over SW. slope.

46.02 Leave mountainous land, enter rolling.

68.02 Old road, bears NE. and SW.

72.92 Wash, 60 lks. wide, 6 ft. deep, course S.15°W.

75.10 Old road, bears NW. and SE.

✓76.02 Intersect the original cor. of secs. 4, 5, 32 and 33, which is a stone 13x9x6 ins., firmly set, marked and

RESURVEY OF S. BDY. OF T. 6 N., R. 2 E.

chains

witnessed as described in the official record.

Reconstruct this cor. monument and alter its reference as follows:

Alongside the original cor. stone, set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bedrock, with a stone 6x8x8 ins., marked with a cross (+) deposited at base, and in a mound of stone to top for corner of secs. 4 and 5, only, with brass cap marked

T6NR2ES33

| | |
|-----|-----|
| S5 | S4 |
| T5N | R2E |

1933

No suitable bearing trees available.

Thence,

S.89°48'W., on true line, continuing measurement.

79.74

Telephone line, bears N.6 $\frac{3}{4}$ °W., and S.6 $\frac{3}{4}$ °E.

80.09

(80.00 chs. in departure); set an iron post, 3 ft. long, 2 ins. in diam., 16 ins. in the ground to bedrock, with a stone 6x6x8 ins., marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 32 and 33, with brass cap marked

| | |
|-----|-----|
| T6N | R2E |
| S32 | S33 |

T5NR2ES5
1933

No suitable bearing trees available.

Land, rolling and mountainous.

Soil, rocky, 4th rate.

Timber, palo verde, mesquite and ironwood.

Undergrowth, greasewood, catclaw, ocotillo and cacti.

S.89°48'W., on true line, on S. bdy. of sec. 32.

Over rolling land, through thinly scattered timber and dense undergrowth.

6115

Wash, 15 lks. wide, 5 ft. deep, course SW.

36.13

Intersect the original $\frac{1}{4}$ sec. cor. which is a stone, 4x8x8 ins., firmly set, projecting 4 ins. above ground, marked and witnessed as described in the official record.

Reconstruct this cor. monument and alter its reference as follows:

Alongside the original cor. stone, set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, with a stone 6x6x8 ins., marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 5, only, with brass cap marked

| |
|-------------------|
| $\frac{1}{4}$ S 5 |
|-------------------|

1933

RESURVEY. OF S. BDY. OF T. 6 N., R. 2 E.

BOOK 4068

chains

No suitable bearing trees available.

Continue line and measurement.

40.00

Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 6x6x8 ins., marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 32, only, with brass cap marked

$$\frac{1}{4} \overset{32}{S32}$$

1933

No suitable bearing trees available.

76.36

Intersect the original corner of secs. 5, 6, 31 and 32, which is a malpais stone 12x12x6 ins., firmly set, marked and witnessed as described in the official record.

Reconstruct this cor. monument, and alter its reference as follows:

Alongside the original cor. stone, set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for the cor. of secs. 5 and 6, only, with brass cap marked

T6NR2ES32

| | |
|-----|-----|
| S6 | S5 |
| T5N | R2E |

1933

No suitable bearing trees available.

Thence,

S.89°53'W., on true line, continuing measurement.

80.00

Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bedrock, with a stone 6x6x8 ins., marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 31 and 32, with brass cap marked

| | |
|--------|-----|
| T6NR2E | |
| S31 | S32 |

T5NR2E

S6

1933

No suitable bearing trees available.

Land, rolling.

Soil, rocky, 4th rate.

Timber, palo verde, ironwood and mesquite.

Undergrowth, greasewood, catclaw and cacti.

S.89°53'W., on true line, on S. bdy. of sec. 31.

Over rolling desert land, through scattering undergrowth.

RESURVEY OF S.. BDY. OF T.. 6 N., R.. 2 E.

chains

✓36.54

Intersect the original $\frac{1}{4}$ sec. cor. of secs. 6 and 31, which is a stone 6x6x4 ins. above ground, firmly set, marked and witnessed as described in the official record.

Reconstruct this cor. monument and alter its reference as follows:

Alongside the original cor. stone, set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 6, only, with brass cap marked

$\frac{1}{4}$ S 6

1933

No suitable bearing trees available.

Thence,

S. 89° 50' W., on true line, continuing measurement.

40.00

Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 31, only, with brass cap marked

$\frac{1}{4}$ S 31

1933

raise a mound of stone, 4 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

✓76.24

Intersect the original cor. of Ts. 5 and 6 N., Rs. 1 and 2 E., which is a stone 4x10x12 ins., firmly set, marked and witnessed as described in the official record.

Reconstruct this cor. monument as follows:

Alongside original cor. stone, set an iron post, 3 ft. long, 3 ins. in diam., 28 ins. in the ground, for cor. of Ts. 5 and 6 N., Rs. 1 and 2 E., with brass cap marked

T6N

R1E | R2E
S36 | S31

S1 | S6

T5N

1933

raise a mound of stone, 3 ft. base, 2 ft. high S. of cor.

Land, rolling.

Soil, rocky 4th. rate.

Timber, a few palo verde, ironwood, and mesquite.

Undergrowth, greasewood, catclaw and ocotillo.

RESURVEY OF THE EAST BDY. OF T. 6 N., R. 2 E. BOOK 4068

Chains

The east bdy. of T. 6 N., R. 2 E., was surveyed by A. N. Oliver, U.S.D.S., in 1910; the entire line was independently resurveyed in 1922 by S. E. Blout, U.S.C.E., as the W. bdy. of T. 6 N., R. 3 E., on a direct line bet. township corners, destroying all the original sec. and $\frac{1}{4}$ sec. cors. and reestablishing cors. referring to areas in T. 6 N., R. 3 E.; only, monumenting same with brass capped iron posts. No later retracements or resurveys are of record. The following notes describe a resurvey of the entire line as of the E. bdy. of T. 6 N., R. 2 E., establishing corners and $\frac{1}{4}$ sec. corners referring to areas in T. 6 N., R. 2 E., only, at 40 ch. intervals in latitude, counting from the south.

Retracement for Resurvey.

From the Cor. of Tps. 5 and 6 N., Rs. 2 and 3 E., here-
inbefore described.

N. $0^{\circ}04'E.$, on random line, on W. bdy. of sec. 31. ($S\frac{1}{2}$).

42.61 The $\frac{1}{4}$ sec. cor. of sec. 31 only.

True course and dist.: N. $0^{\circ}04'E.$, 42.61 chs.

Thence

N. $0^{\circ}04'E.$, on random line, on W. bdy. of sec. 31. ($N\frac{1}{2}$).

40.03 The cor. of secs. 30 and 31 only.

True course and dist.: N. $0^{\circ}04'E.$, 40.03 chs.

N. $0^{\circ}04'E.$, on random line, on W. bdy. of sec. 30. ($S\frac{1}{2}$).

40.03 The $\frac{1}{4}$ sec. cor. of sec. 30 only.

True course and dist.: N. $0^{\circ}04'E.$, 40.03 chs.

Thence

N. $0^{\circ}04'E.$, on random line, on W. bdy. of sec. 30. ($N\frac{1}{2}$).

39.94 The cor. of secs. 19 and 30 only.

True course and dist.: N. $0^{\circ}04'E.$, 39.94 chs.

N. $0^{\circ}04'E.$, on random line, on W. bdy. of sec. 19. ($S\frac{1}{2}$).

40.06 The $\frac{1}{4}$ sec. cor. of sec. 19 only.

True course and dist.: N. $0^{\circ}04'E.$, 40.06 chs.

Thence

N. $0^{\circ}04'E.$, on random line, on W. bdy. of sec. 19. ($N\frac{1}{2}$).

39.97 The cor. of secs. 18 and 19 only.

True course and dist.: N. $0^{\circ}04'E.$, 39.97 chs.

N. $0^{\circ}04'E.$, on random line, on W. bdy. of sec. 18. ($S\frac{1}{2}$).

40.13 The $\frac{1}{4}$ sec. cor. of sec. 18 only.

True course and dist.: N. $0^{\circ}04'E.$, 40.13 chs.

14.

RESURVEY OF THE EAST BDY. OF T. 6 N., R. 2 E.

| | |
|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Chains | Thence |
| | N.0°04'E., on random line on W. bdy. of sec. 18. ($N\frac{1}{2}$). |
| 39.97 | The cor. of secs. 7 and 18 only. |
| | True course and dist.: N.0°04'E., 39.97 chs. |
| | <hr/> |
| | N.0°04'E., on random line, on W. bdy. of sec. 7 ($S\frac{1}{2}$). |
| 39.97 | The $\frac{1}{4}$ sec. cor. of sec. 7 only. |
| | True course and dist.: N.0°04'E., 39.97 chs. |
| | Thence |
| | N.0°04'E., on random line on W. bdy. of sec. 7. ($N\frac{1}{2}$). |
| 40.00 | The cor. of secs. 6 and 7 only. |
| | True course and dist.: N.0°04'E., 40.00 chs. |
| | <hr/> |
| | N.0°04'E., on random line, on W. bdy. of sec. 6. ($S\frac{1}{2}$). |
| 40.00 | The $\frac{1}{4}$ sec. cor. of sec. 6 only. |
| | True course and dist.: N.0-04'E., 40.00 chs. |
| | Thence |
| | N.0°04'E., on random line on W. bdy. of sec. 6. ($N\frac{1}{2}$). |
| 37.18 | The cor. of Tps. 6 and 7 N., R. 2 E. |
| 39.83 | The cor. of Tps. 6 and 7 N., R. 3 E. |
| | True course and dist.: N.0°04'E., 39.83 chs. |
| | <hr/> |
| | RESURVEY |
| | <hr/> |
| | From the original cor. of Ts. 5 and 6 N., Rs. 2 and 3 E., hereinbefore described. |
| | N.0°04'E., on true line, on E. bdy. of sec. 36. |
| | Over rolling land, through scattering timber and dense undergrowth. |
| | Desc. 129 ft. over N. slope. |
| 35.00 | Wash, 15 lks. wide, course W.; asc. 8 ft. over S. slope. |
| 38.00 | Road, bears E. and W. |
| 40.00 | Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross(+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 36 only, with brass cap marked |
| | $\frac{1}{4}$ S36 |
| | 1933 |
| | No suitable bearing trees available. |
| 42.61 | Intersect the $\frac{1}{4}$ sec. cor. of sec. 31 only, which is an |

RESURVEY OF THE E. BDY. OF T. 6 N., R. 2 E.

BOOK 4068

Chains.

iron post, firmly set, projecting 24 ins. above ground and mound of stone, marked and witnessed as described in the official record.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 25 and 36, only, with brass cap marked

| | |
|-----|-----|
| T6N | T6N |
| S25 | R3E |
| S36 | S31 |
| R2E | |

1933

No suitable bearing trees available.

Land, rolling desert.

Soil, rocky 4th. rate.

Timber, palo verde and mesquite.

Undergrowth, greasewood, cacti, catclaw and ocotillo.

N.0°04'E., on true line, on E. bdy. of sec. 25.

Over rolling land, through scattering timber and dense undergrowth.

2.64

Intersect the cor. of secs. 30 and 31, which is an iron post, 2 ins. diam., firmly set, projecting 16 ins. above ground, with brass cap properly marked and witnessed as described in the official record. Add markings to brass cap to read:

| | |
|-----|-----|
| T6N | T6N |
| R2E | S30 |
| S25 | S31 |
| | R3E |

1922-33

30.65

Road, bears NE. and SW.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 25, only, with brass cap marked

| |
|-------------------|
| $\frac{1}{4}$ S25 |
|-------------------|

1933

42.67

Intersect the $\frac{1}{4}$ sec. cor. of sec. 30, only, which is an iron post, 1 in. diam., firmly set, projecting 12 ins. above ground, with brass cap marked and witnessed as described in the official record.

44.40

Wash, 70 lks. wide, 8 ft. deep, course S.80°W.

52.00

Skunk Creek, 100 lks. wide, 8 ft. deep, course SW.

60.50

Wash, 100 lks. wide, 8 ft. deep, course SW.

80.00

Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground for the cor. of secs. 24 and 25, with brass cap marked

RESURVEY OF THE E. BDY. OF T. 6 N., R. 2 E.

Chains.

| | |
|-----|-----|
| T6N | T6N |
| S24 | R3E |
| S25 | S30 |
| R2E | |

1933

No suitable bearing trees available. Raise a mound of stone, 4 ft. base, 2 ft. high, W. of cor.

Land, rolling desert.

Soil, rocky 4th. rate.

Timber, palo verde, mesquite and ironwood.

Undergrowth, greasewood, catclaw and cacti.

N.0°04'E., on true line, on E. bdy. of sec. 24.

Over rolling land, through scattering timber and dense undergrowth.

- 2.61 Intersect the cor. of secs. 19 and 30, which is a 2 ins. iron post, firmly set, projecting 12 ins. above ground, marked and witnessed as described in the official record. Add markings to brass cap to read:

| | |
|-----|-----|
| T6N | T6N |
| R2E | S19 |
| S24 | S30 |
| | R3E |

1922-33

- 33.00 Low divide, bet. Skunk Creek and New River, bears NE. and SW.

- 38.40 Old road, bears E. and W.

- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, with a stone 6x6x8 ins., marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 24, only, with brass cap marked

S24

1933

- 42.67 Intersect the $\frac{1}{4}$ sec. cor. of sec. 19, only, which is a 1 in. iron post, firmly set, projecting 12 ins. above ground, marked and witnessed as described in the official record.

- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 13 and 24, only, with brass-cap marked

| | |
|-----|-----|
| T6N | |
| R2E | R3E |
| S13 | S19 |
| S24 | |

1933

Land, rolling.

Soil, rocky 4th rate.

Timber, palo verde, mesquite and ironwood.

Undergrowth, greasewood, catclaw, ocotillo and cacti.

RESURVEY OF THE E. BDY. of T. 6 N., R. 2 E.

BOOK 4068

Chains

N.0°04'E., on true line, on E. bdy. of sec. 13,

Over rolling land, through scattering timber and dense undergrowth.

- 2.64 Intersect the cor. of secs. 18 and 19, which is an iron post, 2 ins. in diam., firmly set, projecting 12 ins. above ground, with brass cap properly marked and witnessed as described in the official record. Add markings to brass cap to read:

| | |
|-----|-----|
| T6N | T6N |
| R2E | S18 |
| S13 | S19 |
| | R3E |

1922-33

- 11.10 Wash, 5 lks. wide, course SW.

- 35.00 Wash, 150 lks. wide, 15 ft. deep, course SW.; asc. 23 ft. over S. slope.

- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 21 ins. in the ground to bedrock, with a stone 6x6x8 ins., marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 13, only, with brass cap marked

| |
|-------------------|
| $\frac{1}{4}$ S13 |
|-------------------|

1933

No suitable bearing trees available.

- 42.77 Intersect the $\frac{1}{4}$ sec. cor. of sec. 18, which is an iron post, 1 in. in diam., projecting 14 ins. above ground, firmly set, with brass cap properly marked and witnessed as described in the official record.

Asc. 121 ft. over S. slope.

- 75.00 Spur, slopes SE.; desc. 10 ft. over NE. slope.

- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in the ground to bedrock, with a stone 6x6x8 ins., marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 12 and 13, with brass cap marked

| | |
|-----|-----|
| T6N | T6N |
| S12 | R3E |
| S13 | S18 |
| R2E | |

1933

No suitable bearing trees available.

Land, $S\frac{1}{2}$ rolling; $N\frac{1}{2}$ mountainous.

Soil, rocky 4th. rate.

Timber, palo verde, ironwood and mesquite.

Undergrowth, greasewood, catclaw, ocotillo and cacti.

N.0°04'E., on true line, on E. bdy. of sec. 12.

Over mountainous land, through scattering timber and dense

RESURVEY OF THE EAST BDY. OF T. 6 N., R. 2 E.

Chains

undergrowth.

- Desc. 23 ft. over NE. slope.
- 2.00 Wash, 15 lks. wide, course SE.
- 2.74 Intersect the cor. of secs. 7 and 18, which is an iron post, 2 ins. in diam., firmly set, and projecting 12 ins. above ground, with brass cap properly marked and witnessed as described in the official record. Add markings to brass cap to read:

| | |
|-----|-----|
| T6N | T6N |
| R2E | S7 |
| S12 | S18 |
| | R2E |

1922-33
- Asc. 285 ft. over broken SE. slope.
- 27.00 Spur, slopes SW.
- 30.00 Head of draw, course SW.; enter mountainous land, bears E. and W.; asc. 90 ft. along W. slope.
- 38.00 Head of draw, course SW.; continue ascent of 60 ft. over broken SW. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 12, only, with brass cap marked

| |
|-----|
| S12 |
|-----|

1933
- No suitable bearing trees available.
- Asc. 90 ft. over broken SW. slope.
- 42.71 Intersect the $\frac{1}{4}$ sec. cor. of sec. 7, which is an iron post, 1 in. in diam., firmly set, projecting 20 ins. above ground and mound of stone, with brass cap properly marked and witnessed as described in the official record.
Continue ascent of 205 ft. over broken SW. slope.
- 48.95 Ridge, divide between Skunk Creek and New River, bears NW. and SE.; desc. 236 ft. over NE. slope.
- 58.00 Wash, 10 lks. wide, course NE.; asc. 37 ft. over SE. slope.
- 60.80 Low spur, slopes E.; desc. 45 ft. over NE. slope.
- 63.30 Wash, 30 lks. wide, course NE.; asc. 188 ft. over broken S. slope.
- 70.00 Spur, slopes NE.; desc. 145 ft. over N. slope.
- 76.77 Wash, 10 lks. wide, course E.; asc. 20 ft. over SE. slope.
- 78.00 Low spur, slopes E., Thence along E. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 16 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked

RESURVEY OF THE EAST BDY. OF T. 6 N., R. 2 E.

BOOK 4068

Chains.

with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 1 and 12, only, with brass cap marked

| | |
|-----|-----|
| T6N | T6N |
| S1 | R3E |
| S12 | S7 |
| R2E | |

1933

No suitable bearing trees available.

Land, rolling desert and mountainous.

Soil, rocky 4th. rate.

Timber, palo verde.

Undergrowth, greasewood, cacti and ocotillo.

N.0°04'E., on true line, on E. bdy. of sec. 1.

Over mountainous land, through scattering timber and dense undergrowth.

Along level E. slope.

- 2.71 Intersect the cor. of secs. 6 and 7, only, which is an iron post, 2 ins. in diam., firmly set, projecting 18 ins. above ground, and mound of stone, with brass cap properly marked and witnessed as described in the official record. Add markings on brass cap to read:

| | |
|-----|-----|
| T6N | T6N |
| R2E | S6 |
| S1 | S7 |
| | R3E |

1922-33

Asc. 15 ft. over S. slope.

3.95 Spur, slopes SE.; asc. 68 ft. over SE. slope.

9.49 Spur, slopes NE.; desc. 46 ft. over NW. slope.

14.44 Head of gulch, course NE.; asc. 10 ft. over SE. slope.

16.24 Spur, slopes NE.; desc. 273 ft. over N. slope.

27.00 Change to W. slope; desc. 17 ft. along same.

32.00 Spur, slopes NW.; desc. 70 ft. over NE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 1, only, with brass cap marked

| |
|------------------|
| $\frac{1}{4}$ S1 |
|------------------|

1933

No suitable bearing trees available.

Desc. 20 ft. over NE. slope.

42.28 Head of gulch, course NE.; desc. slightly over E. slope.

RESURVEY OF THE EAST BDY. OF T. 6 N., R. 2 E.

Chains

- 42.71 Intersect the $\frac{1}{4}$ sec. cor. of sec. 6, only, which is an iron post, 1 in. in diam., firmly set, projecting 18 ins. above ground, with brass cap properly marked and witnessed as described in the official record.
- Desc. 63 ft. over E. slope.
- 49.00 Spur, slopes NE.; desc. 266 ft. over NW. slope.
- 60.10 Gulch, 15 lks. wide, course NE.; asc. 31 ft. over SE. slope.
- 63.55 Spur, slopes NE.; desc. 64 ft. over NW. slope.
- 67.00 Head of gulch, course NE.; asc. 12 ft. over SE. slope.
- 68.45 Point of spur, slopes NE.; desc. 30 ft. over NE. slope.
- 71.80 Gulch, 10 lks. wide, course NE.; asc. 20 ft. over SE. slope.
- 76.50 Point of spur, slopes NE.; desc. 30 ft. over NE. slope.
- 79.89 Intersect the cor. of Ts. 6 and 7 N., Rs. 2 E., which is an iron post, 3 ins. in diam., firmly set, projecting 18 ins. above ground, and mound of stone, with brass cap properly marked and witnessed as described in the official record.
- Land, mountainous.
Soil, rocky 4th rate.
Timber, scattering mesquite and palo verde.
Undergrowth, greasewood and cacti.

RESURVEY OF THE EAST BDY. OF T. 6 N., R. 1 E.

The east bdy. of T. 6 N., R. 1 E., was surveyed in 1894 by A.T. Colton, U.S.D.S., who established corners thereon at 40 ch. intervals, counting from the south, with common reference to areas on both sides of the line. No retracements or resurveys of any part of the line are of record. The following notes describe a dependent resurvey of the entire line, reconstructing all original corner monuments with brass capped iron posts, altered to refer to areas W. of line only and establishing $\frac{1}{4}$ sec. cors. referring to areas E. of line at midpoint of the west boundaries of the W. range of T. 6 N., R. 2 E., except the W. bdrs. of secs. 6 and 31, where the $\frac{1}{4}$ sec. cors. are established at 40 chs. in latitude from the closing corners.

RETRACEMENT FOR RESURVEY.

From the cor. of Ts. 5 and 6 N., Rs. 1 and 2 E., hereinbefore described.

North, on a random line, on E. bdy. of sec. 36. ($S\frac{1}{2}$).

RESURVEY OF THE EAST BDY. OF T. 6 N., R. 1 E.

BOOK 4068

| Chains | |
|--------|---------------------------------------------------------------------------|
| 39.84 | Fall 4 lks. W. of the $\frac{1}{4}$ sec. cor. |
| | True course and dist. of this half mile: N. $0^{\circ}03'E.$, 39.84 chs. |
| | Thence, |
| | North, on a random line, on E. bdy. of sec. 36. ($N\frac{1}{2}$). |
| 39.87 | Intersect the cor. of secs. 25, 30, 31 and 36. |
| | True course and dist. of this half mile: North, 39.87 chs. |
| 39.84 | North, on a random line, on E. bdy. of sec. 25. ($S\frac{1}{2}$). |
| | Intersect the $\frac{1}{4}$ sec. cor. |
| | True course and dist. of this half mile are therefore North, 39.84 chs. |
| | Thence, |
| | North, on a random line, on E. bdy. of sec. 25. ($N\frac{1}{2}$). |
| 40.04 | Intersect the cor. of secs. 19, 24, 25 and 30. |
| | True course and dist. of this half mile are therefore North, 40.04 chs. |
| 39.94 | North, on a random line, on E. bdy. of sec. 24. ($S\frac{1}{2}$). |
| | Intersect the $\frac{1}{4}$ sec. cor. |
| | True course and dist. of this half mile are therefore North, 39.94 chs. |
| | Thence, |
| | North, on a random line, on E. bdy. of sec. 24. ($N\frac{1}{2}$). |
| 39.95 | Intersect the cor. of secs. 13, 18, 19 and 24. |
| | True course and dist. of this half mile are therefore North, 39.95 chs. |
| 39.93 | North, on a random line, on E. bdy. of sec. 13, ($S\frac{1}{2}$). |
| | Intersect the $\frac{1}{4}$ sec. cor. |
| | True course and dist. of this half mile: North, 39.93 chs. |
| | Thence, |
| | North, on a random line, on E. bdy. of sec. 13. ($N\frac{1}{2}$). |
| 39.98 | Intersect the cor. of secs. 7, 12, 13 and 18. |
| | True course and dist. of this half mile : North, 39.98 chs. |
| | North, on a random line, on E. bdy. of sec. 12. ($S\frac{1}{2}$). |

192
BOOK 4068

RESURVEY OF THE EAST BDY. OF T. 6 N., R. 1 E.

Chains

- 39.98 Fall 8 lks. W. of the $\frac{1}{4}$ sec. cor.
True course and dist. of this half mile: N. $0^{\circ}07'E.$, 39.98 chs.
Thence,
North, on a random line, on E. bdy. of sec. 12. ($N\frac{1}{2}$).
39.96 Intersect the cor. of secs. 1, 6, 7 and 12.
True course and dist. of this half mile: North, 39.96 chs.
North, on a random line, on E. bdy. of sec. 1. ($S\frac{1}{2}$).
39.90 Intersect the original $\frac{1}{4}$ sec. cor.
True course and dist. of this half mile: North, 39.90 chs.
Thence,
North, on a random line, on E. bdy. of sec. 1. ($N\frac{1}{2}$).
39.95 Intersect the cor. of Ts. 6 and 7 N., R. 1 E.
True course and dist. of this half mile: North, 39.95 chs.

RESURVEY.

Return to the cor. of Ts. 5 and 6 N., Rs. 1 and 2 E., hereinbefore described.

N. $0^{\circ}03'E.$, on true line, on E. bdy. of sec. 36. ($S\frac{1}{2}$).

Over rolling land, through scattering timber and dense undergrowth.

23.20 Wash, 1 ch. wide, course SW.

39.84 The $\frac{1}{4}$ sec. cor. of secs. 31 and 36, which is a granite stone 5x10x10 ins., firmly set, marked and witnessed as described in the official record:

Reconstruct this cor. monument and alter its reference as follows:

Alongside original cor. stone, set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock; with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 36, only, with brass cap marked

$\frac{1}{4}$ S36

1933

No suitable bearing trees available.

Thence

North, on true line, on E. bdy. of sec. 36 ($N\frac{1}{2}$).

RESURVEY OF THE EAST BDY. OF T. 6 N., R. 2 E.

BOOK 4068

Chains

45.17

(40.00 chs. S. of closing cor. of secs. 30 and 31, herein after described) set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 31, only, with brass cap marked

$$\left| \frac{1}{4} S31 \right.$$

1933

No suitable bearing trees available.

39.87

Intersect the original cor. of secs. 25, 30, 31 and 36, which is a granite stone 6x6x5 ins., firmly set, marked and witnessed as described in the official record.

Reconstruct this cor. monument and alter its reference as follows:

Alongside the original cor. stone, set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 25 and 36, only, with brass cap marked

| | |
|-----|-----|
| T6N | |
| R1E | R2E |
| S25 | S31 |
| S36 | |

1933

No suitable bearing trees available.

Land, rolling.

Soil, rocky 4th. rate.

Timber, palo verde, ironwood and mesquite.

Undergrowth, greasewood, catclaw and cactus.

North, on true line, on E. bdy. of sec. 25, ($S\frac{1}{2}$)

Over rolling land, through thinly scattered timber and dense undergrowth.

5.30

Point for closing cor. of secs. 30 and 31, established as hereinafter described.

39.20

Old road, bears E. and W.

39.94

Intersect the original $\frac{1}{4}$ sec. cor. of secs. 25 and 30, only, which is a granite stone, 4x10x10 ins., firmly set, marked and witnessed as described in the official record.

Reconstruct this cor. monument and alter its reference as follows:

Alongside the original cor. stone, set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 25, only, with brass cap marked

RESURVEY OF THE EAST BDY. OF T. 6 N., R. 1 E.

Chains

1/4 S25

1933

No suitable bearing trees available, Thence North, on true line on E. bdy. of sec. 25. (N 1/2).

5.43 (Midpoint in latitude on W. bdy. of sec. 30). Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for 1/4 sec. cor. of sec. 30, only, with brass cap marked

1/4 S30

1933

No suitable bearing trees available.

18.31 New River wash, 80 lks. wide, 5 ft. deep, course SW.

40.04 The original cor. of secs. 19, 24, 25 and 30, which is a granite stone 10x10x16 ins., firmly set, marked and witnessed as described in the official record.

Reconstruct this cor. monument, and alter its reference as follows:

Alongside the original cor. stone, set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 24 and 25, only, with brass cap marked

| | |
|-----|-----|
| T6N | T6N |
| S24 | R2E |
| S25 | S30 |
| R1E | |

1933

No suitable bearing trees available.

Land, rolling desert.
Soil, rocky 4th. rate.
Timber, ironwood, palo verde and mesquite.
Undergrowth, greasewood, catclaw and cacti.

North, on true line, on E. bdy. of sec. 24. (S 1/2)

Over rolling desert land, through scattering timber and dense undergrowth.

5.46 Point for closing cor. of secs. 19 and 30, established as hereinafter described.

30.70 Wash, 20 lks. wide, course SW.

39.94 Intersect the original 1/4 sec. cor. of secs. 19 and 24, only, which is a stone 6x6x8 ins., firmly set, marked and witnessed as described in the official record.

RESURVEY OF THE EAST BDY. OF T. 6 N., R. 1 E.

BOOK 4068

Chains

Reconstruct this cor. monument, and alter its reference as follows:

Alongside the original cor. stone, set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 24, only, with brass cap marked

 $\frac{1}{4}$ S24

1933

No suitable bearing trees available.

Thence

North, on true line on E. bdy. of sec. 24. ($N\frac{1}{2}$).

0.70

Power line, bears E. and W.

5.44

(Midpoint in latitude on W. bdy. of sec. 19). Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 6x6x8 ins., marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 19, only, with brass cap marked

 $\frac{1}{4}$ S19

1933

17.10

Wash, 60 lks. wide, 4 ft. deep, course SW.

29.40

Highway, bears NE. to New River Station, and SW. to Marinette.

39.95

Intersect the original cor. of secs. 13, 18, 19 and 24, which is a granite stone 7x7x12 ins., firmly set, marked and witnessed as described in the official record.

Reconstruct this cor. monument, and alter its reference as follows:

Alongside the original cor. stone, set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 13 and 24, only, with brass cap marked

| | |
|-----|-----|
| T6N | T6N |
| S13 | R2E |
| S24 | S19 |
| R1E | |

1933

No suitable bearing trees available.

Land, rolling desert.

Soil, rocky 4th. rate.

Timber, palo verde, mesquite and ironwood.

Undergrowth, greasewood, catclaw, ocotillo and cacti.

North, on true line, on E. bdy. of sec. 13. ($S\frac{1}{2}$)

Over rolling land, through scattering timber and dense undergrowth.

RESURVEY OF THE EAST BDY. OF T. 6 N., R. 1 E.

Chains

5.41 Intersect the point for closing corner of secs. 18 and 19, established as hereinafter described.

29.50 Old road, bears NE. and SW.

39.93 Intersect the original 1/4 sec. cor. of secs. 13 and 18, only, which is a malpais stone 4x6x12 ins., firmly set, marked and witnessed as described in the official record.

Reconstruct this cor. monument, and alter its reference as follows:

Alongside the original cor. stone, set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, and in a mound of stone to top, for 1/4 sec. cor. with brass cap marked

1/4 S13

1933

Thence

North, on true line on E. bdy. of sec. 13. (N 1/2).

5.52 (Midpoint in latitude on W. bdy. of sec. 18). Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 6x6x8 ins., marked with a cross (+) deposited at base, and in a mound of stone to top, for 1/4 sec. cor. of sec. 18, only, with brass cap marked

1/4 S18

1933

No suitable bearing trees available.

39.96 Intersect the original cor. of secs. 7, 12, 13 and 18, which is a malpais stone 5x12x8 ins., firmly set, marked and witnessed as described in the official record.

Reconstruct this cor. monument, and alter its reference as follows:

Alongside the original cor. monument, set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 12 and 13, only, with brass cap marked

| | |
|-----|-----|
| T6N | T6N |
| S12 | R2E |
| S13 | S18 |
| R1E | |

1933

No suitable bearing trees available.

Land, rolling desert,
Soil, rocky 4th. rate.
Timber, ironwood, mesquite and palo verde.
Undergrowth, greasewood and catclaw.

RESURVEY OF THE EAST BDY. OF T. 6 N., R. 1 E.

BOOK 4068

Chains

N.0°07'E., on true line, on E. bdy. of sec. 12.(S $\frac{1}{2}$)

Over rolling land, through scattering undergrowth.

5.57 Intersect the point for closing cor. of secs. 7 and 18, established as hereinafter described.

39.98 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 7 and 12, only, which is a malpais stone 5x10x12 ins., firmly set, marked and witnessed as described in the official record.

Reconstruct this cor. monument, and alter its reference as follows:

Alongside the original cor. stone, set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground, to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 12, only, with brass cap marked

$\frac{1}{4}$ S12

1933

No suitable bearing trees available.

Thence

North, on true line, on E. bdy. of sec. 12.(N $\frac{1}{2}$).

45.55 (Midpoint in latitude on W. bdy. of sec. 7). Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 7, only, with brass cap marked

$\frac{1}{4}$ S17

1933

39.96 Intersect the original cor. of secs. 1, 6, 7 and 12, which is a malpais stone 4x4x6 ins., firmly set, marked and witnessed as described in the official record.

Reconstruct this cor. monument, and alter its reference as follows:

Alongside the original cor. stone, set an iron post, 3 ft. long, 2 ins., in diam., 14 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 1 and 12, only, with brass cap marked

| | |
|-----|-----|
| T6N | T6N |
| S1 | R2E |
| S12 | S7 |
| R1E | |

1933

Land, rolling.

Soil, rocky 4th. rate.

Timber, none.

Undergrowth, greasewood, catclaw, ocotillo and cacti.

RESURVEY OF THE EAST BDY. OF T. 6 N., R. 1 E.

Chains

North, on true line, on E. bdy. of sec. 1 ($S\frac{1}{2}$)

Over rolling land, through dense undergrowth.

5.55 Point for closing cor. of secs. 6 and 7, established as hereinafter described.

39.90 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 1 and 6, only, which is a malpais stone 8x8x12 ins., firmly set, marked and witnessed as described in the official record.

Reconstruct this cor. monument, and alter its reference as follows:

Alongside the original cor. stone, set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of secs. 1, only, with brass cap marked

$\frac{1}{4}$ S1

1933

Thence

North, on true line on E. bdy. of sec. 1. ($N\frac{1}{2}$).

45.65 (40.00 chs. in latitude from the closing cor. of secs. 6 and 7). Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 6, only, with brass cap marked

$\frac{1}{4}$ S6

1933

15.65 Wash, 20 lks. wide, course SE.

39.95 Intersect the original cor. of Ts. 6 and 7 N., R. 1 E., which is a granite stone 6x10x8 ins., firmly set, marked and witnessed as described in the official record.

From this cor., point, the cor. of Ts. 6 and 7 N., R. 2 E., which is an iron post, 3 ins. in diam., firmly set and projecting 12 ins. above ground, with brass cap properly marked and witnessed as described in the official record, bears $N.0^{\circ}21'W.$, 5.67 chs. dist.

Land, rolling desert.

Soil, rocky, 4th rate.

Timber, palo verde, ironwood and mesquite.

Undergrowth, greasewood, catclaw, ocotillo and cacti.

SUBDIVISION OF T. 6 N., R. 2 E.

BOOK 4068

Chains

The south boundary of this Tp. is defective in alinement, therefore, preliminary to the subdivision of this Tp. survey a Sectional Correction Line due west from the cor. of secs. 25 and 36, on E. bdy. of Tp., setting temp. cors. at 40.00 chs. intervals thereon. The permanent sec. cors. are established at points of intersection of the meridional subdivision lines therewith and permanent $\frac{1}{4}$ sec. cors. are then established thereon, at midpoints bet. said sec. cors. with the exception of line bet. secs. 30 and 31, where the $\frac{1}{4}$ sec. cor. is established at 40.00 chs. W., from the cor. of secs. 29, 30, 31 and 32. The $\frac{1}{4}$ sec. cors. of the south tier of sections, on the meridional subdivision lines are established at 40.00 chs. south from the sectional correction line.

From the temp. cor. of secs. 25, 26, 35 and 36, on Sectional Correction Line,

S.0°03'W., on a random line, bet. secs. 35 and 36.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

81.16 A point, 10 lks. W. of true pt. for cor. of secs. 35 and 36, on S. bdy. of Tp., witnessed 1.00 ch. N.89°09'E., as hereinbefore described.

Thence, from true point for cor. in E. channel of Skunk Creek,

N.0°03'E., on true line, bet. secs. 35 and 36.

Over rolling land, through scattering timber and dense undergrowth.

Over bottom of Skunk Creek wash (E. channel), course SW.

10.00 Leave E. channel of Skunk Creek wash, course S. from NE.

16.50 Skunk Creek wash (W. channel), 60 lks. wide, 4 ft. deep, course SW..

41.16 Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, with a stone 5x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S35 | S36

1933

No suitable bearing trees available.

43.38 Old road, bears NE. and SW.

46.18 Enter mountainous land, bears NE. and SW.; asc. 80 ft. over SE. slope.

54.18 Spur, slopes E.; desc. 65 ft. over NE. slope.


SUBDIVISION OF T. 6 N., R. 2 E.

Chains.

62.18 Leave mountainous land, bears NW. and SE. Over rolling land.

70.48 Old road, bears NW. and SE.

81.16 Intersect the Sectional Correction Line. At point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 18 ins in the ground to bedrock, with a stone 4x6x6 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 25, 26, 35 and 36, with brass cap marked



1933

No suitable bearing trees available.

Land, rolling and mountainous.

Soil, rocky 4th. rate.

Timber, ironwood, palo verde and mesquite.

Undergrowth, ocotillo, ball cholla, catclaw, greasewood, giant cactus and prickly pear.

From the cor. of secs. 25 and 36, on E. bdy. of Tp., here-
inbefore described,

West, on Sectional Correction Line, bet., secs. 25 and 36.

Over rolling land, through scattering timber and dense
undergrowth.


27.80 Old road, bears NW. and SE.

30.90 Wash, 70 lks. wide, 25 ft. deep, course S.

36.00 Enter Skunk Creek wash, course SW. Thence across bottom.

39.80 Leave Skunk Creek wash.

39.95 Set an iron post, 3 ft. long, 1 in. in diam., 11 ins. in
the ground to bedrock, with a stone 4x6x8 ins. marked
with a cross (+) deposited at base, and in a mound of
stone to top, for 1/4 sec. cor., with brass cap marked



1933

No suitable bearing trees available.

Continue over rolling land.

52.60 Old road, bears N.10°E., and S. 10°W.

73.40 Old road, bears NW. and SE.

79.90 The cor. of secs. 25, 26, 35 and 36.

SUBDIVISION OF T. 6 N., R. 2 E.

BOOK 4068

| | |
|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| chains | <p>No suitable bearing trees available.</p> <p>Land, rolling. Soil, rocky, 4th rate. Timber, mesquite and palo verde. Undergrowth, greasewood, catclaw and buck horn.</p> |
| 5.35 | <p>N.0°03'E., bet. secs. 25 and 26.</p> <p>Over rolling land, through scattering timber and dense undergrowth.</p> <p>Old road, bears NW. and SE.</p> |
| 15.00 | <p>Low ridge (divide bet. Skunk Creek and New River), bears N.20°E., and S.20°W.,</p> |
| 25.30 | <p>Old road, bears NE. and SW.</p> |
| 40.00 | <p>Set an iron post, 3 ft. long; 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap marked</p> |
| | $\begin{array}{c} \frac{1}{4} \\ \\ S26 \quad \quad S25 \\ \\ 1933 \end{array}$ |
| 78.90 | <p>No suitable bearing trees available.</p> <p>Continue over rolling land.</p> <p>Old road, bears NE. and SW.</p> |
| 80.00 | <p>Set an iron post, 3 ft. long, 2 ins. in diam., 16 ins. in the ground to bedrock, with a stone 4x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 23, 24, 25 and 26, with brass cap marked</p> |
| | $\begin{array}{cc} T6N & R2E \\ S23 & & S24 \\ \hline S26 & & S25 \\ & & 1933 \end{array}$ |
| 40.00 | <p>No suitable bearing trees available.</p> <p>Land, rolling. Soil, rocky, 4th rate. Timber, mesquite and palo verde. Undergrowth, greasewood, cholla and catclaw.</p> |
| 79.86 | <p>East, on random line, bet. secs. 24 and 25.</p> <p>Set temp. $\frac{1}{4}$ sec. cor.</p> <p>Intersect cor. of secs. 24 and 25, on E. bdy. of Tp., hereinbefore described.</p> <p>Thence.</p> |

SUBDIVISION OF T. 6 N., R. 2 E.

chains

West, on true line, bet. secs. 24 and 25.

Over rolling land, through scattering timber and dense undergrowth.

29.86 Low ridge (New River-Skunk Creek divide), bears NE. and SW.

39.93 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap marked

S24

$\frac{1}{4}$ ———

S25

1933

No suitable bearing trees available.

Over rolling land.

79.21 Old road, bears NE. and SW.

79.86 The cor. of secs. 23, 24, 25 and 26.

Land, rolling.

Soil, rocky, 4th rate.

Timber, palo verde and mesquite.

Undergrowth, greasewood and cactus.

N.0°03'E., bet. secs. 23 and 24.

Over rolling land, through scattering timber and dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 22 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap marked

$\frac{1}{4}$

S23 | S24

1933

No suitable bearing trees available.

Over rolling land.

48.60 Wash, 10 lks. wide, course SW.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground to bedrock, for cor. of secs. 13, 14, 23 and 24, with brass cap marked

T6N R2E

S14 | S13

S23 | S24

1933

of stone, 3 ft. base, 2 ft. high, W. of cor. raise a mound

SUBDIVISION OF T. 6 N., R. 2 E.

BOOK 4068

chains

Land, rolling.
Soil, rocky, 4th rate.
Timber, ironwood, palo verde and mesquite.
Undergrowth, greasewood, ocotillo, cactus and catclaw.

East, on random line, bet. secs. 13 and 24.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.82 The cor. of secs. 13 and 24 only, on E. bdy. of Tp., hereinbefore described.

Thence,

West, on true line, bet. secs. 13 and 24.

Over rolling land, through scattering timber and dense undergrowth.

28.32 Wash, 20 lks. wide, 10 ft. deep, course SW.

39.91 Set an iron post, 3 ft. long, 1 in. in diam., 22 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap marked

$\frac{1}{4}$ $\frac{S13}{S24}$

1933

No suitable bearing trees available.

Over rolling land.

52.22 Shallow wash, 10 lks. wide, course SW.

68.12 Wash, 10 lks. wide, 10 ft. deep, course SW.

79.82 The cor. of secs. 13, 14, 23 and 24.

Land, rolling.
Soil, rocky, 4th rate.
Timber, ironwood, palo verde and mesquite.
Undergrowth, greasewood, catclaw and cactus.

N.0°03'E., on true line, bet. secs. 13 and 14.

Over rolling land, through scattering timber and dense undergrowth.

16.80 Wash, 25 lks. wide, 8 ft. deep, course S.25°W.

38.00 Low ridge, bears SW. and NE.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap marked

$\frac{1}{4}$
S14 | S13

1933

SUBDIVISION OF T. 6 N., R. 2 E.

chains

Over rolling land.

68.60 Wash, 20 lks. wide, 30 ft. deep, course S.15°W.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 11, 12, 13 and 14, with brass cap marked

| | |
|-----|-----|
| T6N | R2E |
| S11 | S12 |
| S14 | S13 |

1933

No suitable bearing trees available.

Land, rolling.

Soil, rocky, 4th rate.

Timber, palo verde, ironwood and mesquite.

Undergrowth, greasewood, cactus, ocotillo and catclaw.

East, on random line, bet. secs. 12 and 13.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.78 Intersect the E. bdy. of Tp. 16 lks. N. of the cor. of secs. 12 and 13, only, as hereinbefore described.

Thence,

N.89°53'W., on true line, bet. secs. 12 and 13.

Over rolling land, through scattering timber and dense undergrowth.

Asc. 40 ft. over NE. slope.

4.80 Change to along S. slope.

11.80 Spur, slopes SW.; desc. 57 ft. over W. slope.

23.78 Wash, 15 lks. wide, course S.80°W. Along N. edge of wash.

24.78 Pt. of spur, (from N.).

25.78 Same wash, course N.60°W., Along N. slope.

30.78 Small butte, bears about 1 ch. S.; desc. 49 ft. over NW. slope.

37.78 Wash, 20 lks. wide, 18 ft. deep, course SW.

39.89 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 4x5x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap marked

S12


S13

1933

No suitable bearing trees available.

SUBDIVISION OF T. 6 N., R. 2 E.

BOOK 4068

| | |
|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| chains | Asc. 29 ft. along rolling S. slope. |
| 59.78 | Spur, slopes SW.; desc. 108 ft. over NW. slope. |
| 73.78 | Wash, 10 lks. wide, 5 ft. deep, course SW. Over rolling SW. slope. |
| 79.78 | The cor. of secs. 11, 12, 13 and 14. Land, rolling and mountainous. Soil, rocky, 4th rate. Timber, palo verde, ironwood and mesquite. Undergrowth, greasewood, cactus, ocotillo and catclaw. |
| | N.0°03'E., bet. secs. 11 and 12. Over mountainous land, through scattering timber and dense undergrowth. Over rolling SW. slope. |
| 2.30 | Wash, 10 lks. wide, course S.10°W. Change to along E. slope. |
| 14.00 | Same wash, 8 lks. wide, course SE. (from N.) along wash bottom. |
| 18.50 | Leave wash, (from NE.) 35 ft. above sec. cor.; asc. 205 ft. over S. slope. |
| 30.00 | Spur, slopes SW. Thence along W. slope. |
| 30.60 | Spur, slopes W. Desc. 93 ft. over N. slope. |
| 34.40 | Wash, 5 lks. wide, course W.; along rolling W. slope. |
| 40.00 | Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 4x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap marked |
| | $\frac{1}{4}$  1933 |
| | No suitable bearing trees available. Along broken S. slope. |
| 60.00 | Wash, 15 lks. wide, course S.15°W.; asc. 70 ft. over SE. slope. |
| 68.00 | Spur, slopes SW. Desc. 52 ft. over NW. slope. |
| 76.00 | Wash, 5 lks. wide, course W. over SW. slope. |
| 80.00 | True pt. for cor. of secs. 1, 2, 11 and 12, falls in wash, 4 lks. wide, course S.20°W., where it is impracticable to monument, therefore witness cor. is established at a pt. 10 lks. N.0°14'E., hereinafter described. Land, rolling and mountainous. Soil, rocky, 4th rate. Timber, palo verde, ironwood and mesquite. Undergrowth, greasewood, cactus, ocotillo and catclaw. |

SUBDIVISION OF T. 6 N., R. 2 E.

chains

S.89°53'E. on a random line, bet. secs. 1 and 12 (from true pt. for cor. of secs. 1, 2, 11 and 12)

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.62 Intersect the E. bdy. of Tp. at a pt. 20 lks. S. of cor. of secs. 1 and 12, only, hereinbefore described.

Thence,

S.89°58'W., on true line, bet. secs. 1 and 12.

Over mountainous land, through scattering timber and dense undergrowth.

Asc. 190 ft. over NE. slope.

7.12 Saddle in ridge, bears N. and S. Desc. 300 ft. over W. slope.

16.22 Wash, 4 lks. wide, course NW. Along broken N. slope.

26.02 Spur, slopes S.80°W. (from S.70°E.) Desc. 80 ft. along broken N. slope.

34.62 Spur, slopes NW. Desc. 96 ft. over SW. slope.

39.81 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock, with a stone 5x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap marked

S 1

$\frac{1}{4}$

S12

1933

No suitable bearing trees available.

Desc. 75 ft. over SW. slope.

44.62 Change to W. slope,; desc. 131 ft.

51.22 Wash, 10 lks. wide, course NW. Along N. slope.

57.62 Spur, slopes N.80°W. Desc. 247 ft. over rolling W. slope.

79.60 Wash, 4 lks. wide, course S.20°W.

79.62 True pt. for cor. of secs. 1, 2, 11 and 12, in wash.

Land, mountainous.

Soil, rocky 4th rate.

Timber, palo verde, ironwood and mesquite.

Undergrowth, greasewood, cactus, ocotillo and catclaw.

N.0°03'E., on a random line, bet. secs. 1 and 2.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.83 Intersect the N. bdy. of the Tp., at a pt. 40 lks. E. of the cor. of secs. 1, 2, 35 and 36, which is an iron post, 2 ins. in diam., firmly set, projecting 26 ins. above ground, in a mound of stone, with brass cap marked and witnessed as described in the official record.

Thence,

SUBDIVISION OF T. 6 N., R. 2 E.

| | |
|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Chains | <p>S.0°14'E., on true line, bet. secs. 1 and 2.</p> <p>Over mountainous land, through scattering timber and densz undergrowth.</p> <p>Desc. 70 ft. over SE. slope.</p> <p>5.83 Wash, 4 lks. wide, course SW. Along broken W. slope.</p> <p>17.33 Change to rolling SW. slope.; desc. 40 ft.</p> <p>33.83 Wash, 20 lks. wide, course W.; asc. 45 ft. over rolling NW. slope.</p> <p>39.83 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 2x5x4 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked</p> <div style="text-align: center;"> $\frac{1}{4}$ S2 S1 1933 </div> <p>No suitable bearing trees available.</p> <p>Asc. 15 ft. over rolling NW. slope.</p> <p>41.13 Spur, slopes W.; desc. 95 ft. over SW. slope.</p> <p>60.83 Wash, 35 lks. wide, course W.; asc. 25 ft. over rolling NW. slope.</p> <p>75.83 Spur, slopes W. (from NE.). Desc. 41 ft. over SE. slope.</p> <p>79.73 Witness cor. for secs. 1, 2, 11 and 12.</p> <p>79.73 Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in the ground to bedrock, with a stone 2x2x4 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for witness cor. of secs. 1, 2, 11 and 12, with brass cap marked</p> <div style="text-align: center;"> T6N R2E S2 S1 S11 S12 WC 1933 </div> <p>No suitable bearing trees available.</p> <p>79.83 True point for the cor. of secs. 1, 2, 11 and 12, in wash.</p> <p>Land, mountainous, and rolling. Soil, rocky 4th. rate. Timber, palo verde, ironwood and mesquite. Undergrowth, greasewood, cactus, ocotillo and catclaw.</p> |
| 40.00 | <p>From temp. cor. of secs. 26, 27, 34 and 35.</p> <p>S.0°03'W., on a random line, bet. secs. 34 and 35.</p> <p>Set temp. $\frac{1}{4}$ sec. cor.</p> |

SUBDIVISION OF T. 6 N., R. 2 E.

Chains

81.86 A pt. 12 lks. West of cor. of secs. 34 and 35, only, on S. bdy. of Tp., hereinbefore described.

Thence

N.0°03'E., on true line, bet. secs. 34 and 35.


Over rolling land, through scattering timber and dense undergrowth.

Asc. 167 ft. over SW. slope.

35.00 Enter mountainous land, continue over SW. slope.

41.50 Spur, slopes SW.

41.86 Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, with a stone 2x3x5 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for 1/4 sec. cor., with brass cap marked




Asc. 20 ft. over rocky SW. slope.

45.40 Ridge, bears NW. and SE.; desc. 150 ft. over rolling NE. slope.

57.80 Spur, slopes NE. Continue desc. 65 ft. over NE. slope.

67.80 Wash, 10 lks. wide, course NE.; asc. 91 ft. over S. slope.

81.86 Intersect the sectional correction line at a point 79.98 chs. West of the cor. of secs. 25, 26, 35 and 36. At point of intersection, Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, with a stone 2x3x6 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 26, 27, 34 and 35, with brass cap marked



1933

No suitable bearing trees available.

The cor. established on S. slope of butte.

Land, rolling and mountainous.

Soil, rocky, 4th rate.

Timber, mesquite, palo verde and ironwood.

Undergrowth, greasewood, cactus, catclaw and ocotillo.

From cor. of secs. 25, 26, 35 and 36.

West, on sectional correction line, bet. secs. 26 and 35.

SUBDIVISION OF T. 6 N., R. 2 E.

BOOK 4068

Chains

Over rolling land, through scattering timber and dense undergrowth.

Over gradual NE. slope.

6.50 Old road, bears NW. and SE.

25.10 Leave rolling land, bears NW. and SE. Enter mountainous land. Asc. 47 ft. over NE. slope.

39.99 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 2x4x5 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

S 26
 $\frac{1}{4}$ ———
S 35

1933

Asc. 232 ft. over E. slope.

56.50 Ridge, bears NW. and SE. Rocky butte bears about 2 chs. SE. Desc. 212 ft. over NW. slope.

71.10 Head of wash, course SW. Saddle in spur, bears about $3\frac{1}{2}$ chs. NE.; asc. 18 ft. over SE. slope.

79.98 The cor. of secs. 26, 27, 34 and 35.

Land, mountainous and rolling.

Soil, rocky 4th. rate.

Timber, palo verde, ironwood and mesquite.

Undergrowth, greasewood, cactus, catclaw and ocotillo.

N.0°03'E., bet. secs. 26 and 27.

Over mountainous land, through scattering timber and dense undergrowth.

Asc. 210 ft. over S. slope.

11.00 Top of butte on ridge, bears NW. and SE.; desc. 388 ft. over NE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, with a stone 2x4x6 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
|
S27 | S26

1933

Leave mountainous land. Asc. 50 ft. over rolling N. slope.

50.00 Road, bears NW. and SE.

79.50 Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, with a stone 2x3x5 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for witness cor. of secs. 22, 23, 26 and 27, with brass cap marked

SUBDIVISION OF T. 6 N., R. 2 E.

| | |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Chains. | <p>T6N R2E WC S22 S23 S27 S26</p> |
| | <p>1933</p> |
| | <p>No suitable bearing trees available.</p> |
| 80.00 | <p>True pt. for cor. falls in wash, 35 lks. wide, course SW., where it is impracticable to set mon. Establish witness corner as hereinbefore described.</p> |
| | <p>Land, rolling ($N\frac{1}{2}$); mountainous ($S\frac{1}{2}$). Soil, rocky 4th. rate. Timber, ironwood, palo verde and mesquite. Undergrowth, greasewood, cactus, catclaw and buck thorn.</p> |
| | <p>East, on a random line, bet. secs. 23 and 26. (from true pt.)</p> |
| 40.00 | <p>Set temp. $\frac{1}{4}$ sec. cor.</p> |
| 79.94 | <p>A pt. 6 lks. S. of cor. of secs. 23, 24, 25 and 26.</p> |
| | <p>Thence</p> |
| | <p>S.89°57'W., on true line, bet. secs. 23 and 26.</p> |
| | <p>Over rolling land, through scattering timber and dense undergrowth.</p> |
| 39.97 | <p>Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 2x3x5 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ dec. cor., with brass cap marked</p> |
| | <p>$\frac{1}{4}$ S 23 S. 26</p> |
| | <p>1933</p> |
| | <p>No suitable bearing trees available.</p> |
| | <p>Over rolling land.</p> |
| 60.00 | <p>Wash, 35 lks. wide, course S.75°W. (from NE.)</p> |
| 75.00 | <p>Same wash, course N.85°W.</p> |
| 79.94 | <p>True pt. for cor. of secs. 22, 23, 26 and 27.</p> |
| | <p>Land, rolling. Soil, rocky 4th. rate. Timber, palo verde, ironwood and mesquite. Undergrowth, greasewood, cactus, catclaw and ocotillo.</p> |
| | <p>N.0°03'E., bet. secs. 22 and 23. (from true pt.)</p> |
| | <p>Over rolling land, through scattering timber and dense undergrowth.</p> |
| 35.85 | <p>Wash, 20 lks. wide, 3 ft. deep, course S.20°W.</p> |


SUBDIVISION OF T. 6 N., R. 2 E.

BOOK 4068

chains

40.00

Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 1x4x5 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked




A palo verde, 10 ins. diam., bears S.24°E., 156 lks. dist. mkd. $\frac{1}{4}$ S23 BT. from which

Over rolling land.

80.00

Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, with a stone 2x3x5 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 14, 15, 22 and 23, with brass cap marked



1933

No suitable bearing trees available.

Land, rolling.

Soil, rocky 4th rate.

Timber, palo verde, mesquite and ironwood.

Undergrowth, greasewood, cactus, ocotillo and catclaw.

N.89°57'E., on random line, bet. secs. 14 and 23.

40.00

Set temp. $\frac{1}{4}$ sec. cor.

80.10

A pt. 16 lks. S. of cor. of secs. 13, 14, 23 & 24.

Thence,

S.89°50'W., on true line, bet. secs. 14 and 23.


Over rolling land, through scattering timber and dense undergrowth.

17.90

Wash, 20 lks. wide, course SW.

40.05

Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 1x3x5 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked



1933

Over rolling land.

56.40

Wash, 10 lks. wide, course S.20°W.

SUBDIVISION OF T. 6 N., R. 2 E.

chains

77.00 Wash, 20 lks. wide, 3 ft. deep, course S.


80.10 The cor. of secs. 14, 15, 22 and 23.

Land, rolling.
Soil, rocky 4th rate.
Timber, palo verde, ironwood and mesquite.
Undergrowth, greasewood, cactus, catclaw and ocotillo.

N.0°03'E., bet. secs. 14 and 15.


Over rolling land, through scattering timber and dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 2x3x4 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked



Over rolling land.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in the ground to bedrock, with a stone 1x2x4 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 10, 11, 14 and 15, with brass cap marked



1933

No suitable bearing trees available.

Land, rolling.
Soil, rocky, 4th rate.
Timber, palo verde, ironwood and mesquite.
Undergrowth, greasewood, cactus, catclaw and ocotillo

N.89°50'E., on random line, bet. secs. 11 and 14.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.12 A pt. 23 lks. N. of the cor. of secs. 11, 12, 13 and 14.

Thence,

West, on true line, bet. secs. 11 and 14.

Over rolling land, through scattering timber and dense undergrowth.

0.75 Wash, 10 lks. wide, 8 ft. deep, course S.10°W. Asc. 70 ft. over SE. slope.

17.00 Spur, slopes SW. Desc. 103 ft. over NE. slope.

SUBDIVISION OF T. 6 N., R. 2 E.

43.
BOOK 4068

| | |
|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| chains | |
| 27.00 | Wash, 12 lks. wide, course SW. |
| 28.50 | Wash, 12 lks. wide, course S. Forks of washes 1 ch. S., course then SW. Over rolling SW. slope. |
| 40.06 | Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 1x3x4 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap marked |
| | $\begin{array}{r} \frac{1}{4} \text{ S } 11 \\ \hline \text{S } 14 \\ 1933 \end{array}$ |
| | Continue over rolling land. |
| 47.00 | Wash, 10 lks. wide, course SW. |
| 54.10 | Wash, 10 lks. wide, course S. |
| 80.12 | The cor. of secs. 10, 11, 14 and 15. |
| | Land, rolling. Soil, rocky, 4th rate. Timber, palo verde, ironwood and mesquite. Undergrowth, greasewood, catclaw, cactus and ocotillo. |
| | N.0°03'E., bet. secs. 10 and 11. |
| | Over rolling land, through scattering timber and dense undergrowth. |
| 1.40 | Enter wash, 30 lks. wide, 12 ft. deep, course S. 70°W. (from N.) |
| 6.70 | Leave same, (from NE.) |
| 40.00 | Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground to bedrock, with a stone 2x2x3 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap marked |
| | $\begin{array}{r} \frac{1}{4} \\ \hline \text{S10} \text{S11} \\ 1933 \end{array}$ |
| | Continue over rolling land. |
| 80.00 | Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, with a stone 1x2x5 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 2, 3, 10 and 11, with brass cap marked |
| | $\begin{array}{r} \text{T6N } \text{R2E} \\ \hline \text{S3} \text{S2} \\ \hline \text{S10} \text{S11} \\ 1933 \end{array}$ |
| | No suitable bearing trees available. |
| | Land, rolling. Soil, rocky, 4th rate. Timber, palo verde, ironwood and mesquite. Undergrowth, greasewood, cactus, ocotillo and catclaw. |
| | East, on random line, bet. secs. 2 and 11 |
| 40.00 | Set temp. $\frac{1}{4}$ sec. cor. |

44.


SUBDIVISION OF T. 6 N., R. 2 E.

| | |
|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| chains | |
| 80.10 | A pt. 23 lks. S. of true point for cor. of secs. 1, 2, 11 and 12. |
| | Thence |
| | S. 89° 50' W., on true line, bet. secs. 2 and 11. |
| | Over mountainous land, through scattering timber and dense undergrowth. |
| | Asc. 35 ft. over SE. slope. |
| 13.60 | Spur, slopes SW. Desc. 185 ft. over W. slope. |
| 25.10 | Change to along S. slope. Desc. 35 ft. |
| 35.10 | Saddle in spur, bears N. about 2 chs. Change to SE. slope. |
| 40.05 | Set an iron post, 3 ft. long, 1 in. in diam. 18 ins. in the ground to bedrock, with a stone 2x2x4 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap marked |
| | $\frac{1}{4} \begin{array}{c} S 2 \\ \hline S 11 \\ 1933 \end{array}$ |
| 40.10 | Butte about 150 ft. high, bears N. 3 chs. Change to SE. slope. |
| 43.10 | Spur, slopes SW. Desc. 101 ft. over NW. slope. |
| 55.10 | Change to SW. slope. Desc. 38 ft. |
| 80.10 | The cor. of secs. 2, 3, 10 and 11. |
| | Land, mountainous and rolling. |
| | Soil, rocky, 4th rate. |
| | Timber, palo verde, ironwood and mesquite. |
| | Undergrowth, greasewood, catclaw, cactus and ocotillo. |
| | N. 0° 14' W., on random line, bet. secs. 2 and 3. |
| 40.00 | Set temp. $\frac{1}{4}$ sec. cor. |
| 80.00 | A pt. 9 lks. W., of cor. of secs. 2, 3, 34 and 35, on N. bdy. of the Tp., which is an iron post, 2 ins. diam. projecting 16 ins. above ground, firmly set in ground and mound of stone, marked on brass cap and witnessed as described in the official record. |
| | Thence |
| | S. 0° 10' E., on true line, bet. secs. 2 and 3. |
| | Over rolling land, through scattering timber and dense undergrowth. |
| | Along broken W. slope. |
| 7.80 | Wash, 40 lks. wide, course W. Asc. 51 ft. over NW. slope. |
| 26.00 | Ridge, bears E. and W. Head of spur, slopes SW. Over S. slope. |
| 40.00 | Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, with a stone 1x2x5 ins. marked with a cross (+) deposited at base, and in a mound of |

SUBDIVISION OF T. 6 N., R. 2 E.

BOOK 4068

Chains

stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

Desc. 96 ft. over gradual SE. slope.

72.50 Wash, 20 lks. wide, 4 ft. deep, course SW.

75.70 Wash, 40 lks. wide, 5 ft. deep, course S.80°W. Over SW. slope.

80.00 The cor. of secs. 2, 3, 10 and 11.

Land, rolling.

Soil, rocky 4th. rate.

Timber, palo verde, ironwood and mesquite.

Undergrowth, greasewood, catclaw, cactus and ocotillo.

From temp. for. of secs. 27, 28, 33 and 34.

S.0°02'W., on a random line, bet. secs. 33 and 34.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

81.97 A pt. 12 lks. West, of cor. of secs. 33 and 34, only, on S. bdy. of Tp., hereinbefore described,

Thence

N.0°02'E., bet. secs. 33 and 34.


Over rolling land, through scattering timber and dense undergrowth.

Asc. 89 ft. over S. slope.

2.37 Ridge, bears NW. and SE.; desc. 400 ft. over NE. slope.

31.97 Leave mountainous land, bears NW. and SE. Over rolling land.

38.37 Wash, 8 lks. wide, course N.80°W.

41.97 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap markedof stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high, W. of cor. raise a mound

Continue over rolling land.

81.97 Intersect the sectional correction line at a point, 80.00 chs. West of the cor. of secs. 26, 27, 34 and 35. At point of intersection

Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, with a stone 2x2x6 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 27, 28, 33 and 34, with brass cap marked

SUBDIVISION OF T. 6 N., R. 2 E.

| | | | | | | | |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------|-----|------|-----|-----|
| Chains. | <table border="1" style="margin: auto;"> <tr> <td>T6N</td> <td>R2E</td> </tr> <tr> <td>S28</td> <td>S27</td> </tr> <tr> <td>S33</td> <td>S34</td> </tr> </table> <p>1933</p> <p>No suitable bearing trees available.</p> <p>A bench mark of the U.S. Geological Survey, marked elevation 1705 ft., datum PH11, bears N. 62$\frac{1}{2}$° E., 30.06 chs. dist.; an iron post, 3 in. diam., firmly set, projecting 12 ins. above ground.</p> <p>Land, S. 30 chs. mountainous; N. 50 chs. rolling. Soil, rocky 4th. rate. Timber, palo verde, ironwood and mesquite. Undergrowth, greasewood; catclaw, cactus and ocotillo.</p> | T6N | R2E | S28 | S27 | S33 | S34 |
| T6N | R2E | | | | | | |
| S28 | S27 | | | | | | |
| S33 | S34 | | | | | | |
| 13.50 | From cor. of secs. 26, 27, 34 and 35, West, on sectional correction line, bet. secs. 27 and 34. Over rolling mountainous land, through scattering timber and dense undergrowth. Desc. 21 ft. along S. slope. | | | | | | |
| 30.00 | Change to SW. slope. Desc. 90 ft. | | | | | | |
| 40.00 | Leave mountainous land, bears N. and S. Over rolling land. | | | | | | |
| 40.00 | Set an iron post, 3 ft. long, 1 in. in diam., 15 ins. in the ground to bedrock, with a stone 1x3x4 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor.; with brass cap marked | | | | | | |
| | <table border="1" style="margin: auto;"> <tr> <td>$\frac{1}{4}$</td> <td>S 27</td> </tr> <tr> <td></td> <td>S 34</td> </tr> </table> <p>1933</p> | $\frac{1}{4}$ | S 27 | | S 34 | | |
| $\frac{1}{4}$ | S 27 | | | | | | |
| | S 34 | | | | | | |
| 42.40 | Continue over rolling land. | | | | | | |
| 44.60 | Wash, 10 lks. wide, course N. 80° W. | | | | | | |
| 50.30 | Same wash, course S. 80° W. | | | | | | |
| 50.80 | Telephone line (2 wires), bears N. and S. | | | | | | |
| 51.80 | Same wash, course N. 85° W. | | | | | | |
| 53.30 | Black Canyon Highway, bears N. and S. | | | | | | |
| 80.00 | Power line (3 wires), bears N. and S. | | | | | | |
| 80.00 | The cor. of secs. 27, 28, 33 and 34. Land, rolling W. 50 chs.; mountainous E. 30 chs. Soil, rocky 4th. rate. Timber, palo verde, ironwood and mesquite. Undergrowth, greasewood, cactus, catclaw and ocotillo. | | | | | | |

SUBDIVISION OF T. 6 N., R. 2 E.

BOOK 4068

chains

N.0°02'E., bet. secs. 27 and 28.

Over rolling land, through scattering timber and dense undergrowth.

7.00 Wash, 5 lks. wide, 5 ft. deep, course SW.

20.00 Leave rolling land, bears E. and W. Enter mountainous land. Asc. 78 ft. over S. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock, with a stone 2x3x4 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
$$\frac{1}{4}$$

| | |
|------|-----|
| S28 | S27 |
| 1933 | |

Asc. 62 ft. over S. slope.

48.70 Ridge, bears E. and W. Desc. 34 ft. over NE. slope. Butte on ridge, bears about 5 chs. W.

55.00 Leave mountainous land, bears NW. and SE. Thence over rolling land.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bedrock, with a stone 1x3x6 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 21, 22, 27 and 28., with brass cap marked

| | |
|-----|-----|
| T6N | R2E |
| S21 | S22 |
| S28 | S27 |

1933

No suitable bearing trees available.

Land, rolling and mountainous.

Soil, rocky, 4th rate.

Timber, palo verde, ironwood and mesquite.

Undergrowth, greasewood, catclaw, cactus and ocotillo.

East, on random line, bet. secs. 22 and 27.

40.00 Set temp+ $\frac{1}{4}$ sec. cor.

80.10 A pt. 14 lks. N. of true pt. for cor. of secs. 22, 23, 26 and 27.

Thence,

N.89°54'W., on true line, bet. secs. 22 and 27.

Over rolling land, through scattering timber and dense undergrowth.

Along bottom of wash.

0.70 Leave wash, course S.80°W.

3.00 Old road, bears N. and S.

chains

9.10 Wash, 20 lks. wide, course SW. (forks of wash 1 ch. SW.)

10.20 Enter wash, channel from NE.


14.00 Leave same, course SW.

33.00 Wash, 35 lks. wide, 20 ft. deep, course S.

37.00 Old road, bears NE, and SW.

38.00 Old road, bears E. and W.

40.05 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground; for 1/4 sec. cor. with brass cap marked



1933

of stone, 3 ft. base, 2 ft. high, N. of cor. raise a mound

Over rolling land.

52.30 Telephone line (2 wires) bears N.18°W. and S.18°E.

56.90 Black Canyon Highway, bears same.

80.10 The cor. of secs. 21, 22, 27 and 28.

Land, rolling.

Soil, rocky 4th rate.

Timber, palo verde, ironwood and mesquite.


Undergrowth, greasewood, cactus, catclaw and ocotillo.

N.0°02'E., bet. secs. 21 and 22.

Over rolling land, through scattering timber and dense undergrowth.

38.10 Power line (3 wires) bears, N.88°E., and S.88°W.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 2x2x6 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for 1/4 sec. cor., with brass cap marked




1933

Continue over rolling land.

58.00 Corral bears E. about 8 chs. dist.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, with a stone 2x2x4 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 15, 16, 21 and 22, with brass cap marked



1933

SUBDIVISION OF T. 6 N., R. 2 E.

BOOK 4068

chains

No suitable bearing trees available.

Land, rolling.
Soil, rocky, 4th rate.
Timber, palo verde, ironwood, and mesquite.
Undergrowth, greasewood, cactus, catclaw and ocotillo.

S.89°54'E., on random line, bet. secs. 15 and 22.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.00 A pt. 23 lks. S. of cor. of secs. 14, 15, 22 and 23.

Thence,

S.89°56'W., on true line, bet. secs. 15 and 22.

Over rolling land, through scattering timber and dense undergrowth.

4.50 Old road, bears N. and S.

35.10 Wash, 30 lks. wide, 5 ft. deep, course S.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in the ground with 4 pieces of green glass deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

S 15
 $\frac{1}{4}$ S 22

1933

Continue over rolling land

59.10 Telephone line (2 wires) bears N.5 $\frac{1}{2}$ °W., and S.5 $\frac{1}{2}$ °E.

60.00 Black Canyon Highway, bears same.

61.30 Cline's Tank, bears S.25°W.

62.20 Power line (2 wires) bears N.5 $\frac{1}{2}$ °W., and S.5 $\frac{1}{2}$ °E.

71.90 Wash, 20 lks. wide, course SE.

80.00 The cor. of secs. 15, 16, 21 and 22.

Land, rolling.
Soil, rocky, 4th rate.
Timber, palo verde, ironwood and mesquite.
Undergrowth, greasewood, catclaw, cactus and ocotillo.


N.0°02'E., bet. secs. 15 and 16.

Over rolling land, through scattering timber and dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 1x3x4 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

SUBDIVISION OF T. 6 N., R. 2 E.

chains




from which
 An ironwood, 10 ins. diam., bears S.15°E., 94 lks.
 dist., mkd. $\frac{1}{4}$ S15 BT.
 A mesquite, 4 ins. diam., bears S.65°W., 57 lks.
 dist., mkd. $\frac{1}{4}$ S16 BT.

Continue over rolling land.

43.60 Wash, 10 lks. wide, course S.20°E.

73.00 Same wash, course S.25°W.

80.00 Set an iron post, 3 ft. long, 2 in. in diam., 20 ins. in the ground to bedrock, with a stone 2x3x5 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 9, 10, 15 and 16, with brass cap marked



1933

Fred Mayer's house bears N.75°E., from corner.

Land, rolling,
 Soil, rocky 4th rate.
 Timber, palo verde, ironwood and mesquite.
 Undergrowth, greasewood, catclaw, cactus and ocotillo.

N.89°56'E., on random line, bet. secs. 10 and 15.

40.00 Set temp+ $\frac{1}{4}$ sec. cor.

79.98 A pt. 9 lks. N. of cor. of secs. 10, 11, 14 and 15.


Thence,

West, on true line, bet. secs. 10 and 15.

Over rolling land, through scattering timber and dense undergrowth.

1.48 Wash, 20 lks. wide, 15 ft. deep, course SW.

39.99 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 2x2x4 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked



1933

Fred Mayer's house, bears N.34 $\frac{1}{2}$ °E.

45.58 Wash, 40 lks. wide, 25 ft. deep, course S.

SUBDIVISION OF T. 6 N., R. 2 E.

BOOK 4068

chains

- 54.28 Black Canyon Highway, bears N. and S.
 56.38 Telephone line (2 wires), bears N. 20°E., and S.20°W.
 59.65 Power line (3 wires), bears same.
 74.88 Wash, 10 lks. wide, course SW.
 79.98 The cor. of secs. 9, 10, 15 and 16.

Land, rolling.
 Soil, rocky, 4th rate.
 Timber, palo verde, mesquite and ironwood.
 Undergrowth, greasewood, cactus, catclaw and ocotillo.

N.0°02'E., bet. secs. 9 and 10.

Over rolling land, through scattering timber and dense undergrowth.

- 39.20 Old road, bears NW. and SE.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam. 12 ins. in the ground to bedrock, with a stone 1x3x5 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

S9 | S10

1933

Continue over rolling land.

- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam. 18 ins. in the ground to bedrock, with a stone 1x3x5 ins. marked with a cross (+) deposited as base, and in a mound of stone to top, for cor. of secs. 3, 4, 9 and 10, with brass cap marked

T6N R2E

S4 | S3

S9 | S10

1933

No suitable bearing trees available.

Land, rolling.
 Soil, rocky, 4th rate.
 Timber, palo verde, ironwood and mesquite.
 Undergrowth, greasewood, cactus, catclaw and ocotillo.

East, on random line, bet. secs. 3 and 10.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.00 Intersect the cor. of secs. 2, 3, 10 and 11.

Thence,

West, on true line, bet. secs. 3 and 10.

Over rolling land, through scattering timber and dense undergrowth.

chains

9.20 Wash, 40 lks. wide, 5 ft. deep, course SW.

31.15 Telephone line (2 wires), bears N.12 $\frac{1}{2}$ °E., and S.12 $\frac{1}{2}$ °W.

34.30 Power line (3 wires), bears same.

40.00 Set an iron post, 3 ft. long, 1 in. in diam. 8 ins. in the ground to bedrock, with a stone 1x2x4 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

S 3
 $\frac{1}{4}$
S 10
1933

Continue over rolling land.

55.70 Black Canyon Highway, bears N. and S.

80.00 The cor. of secs. 3, 4, 9 and 10.

Land, rolling.
Soil, rocky, 4th rate.
Timber, palo verde, mesquite and ironwood.
Undergrowth, greasewood, catclaw, cactus and ocotillo.

N.0°10'W., on random line, bet. secs. 3 and 4.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.20 Intersect the N. Bdy. of Tp., at a pt. 5 lks. W. of cor. of secs. 3, 4, 33 and 34, which is an iron post, 2 ins. in diam. projecting 28 ins. above ground, firmly set in ground and mound of stone, marked on brass cap and witnessed as described in the official record.

Thence,

S. 0°08'E., on true line, bet. secs. 3 and 4.

Over rolling land, through scattering timber and dense undergrowth.

36.20 New River wash (dry) 2 chs. wide and 4 ft. deep, course SW.

40.20 Set an iron post, 3 ft. long, 1 in. in diam. 28 ins. in the ground to bedrock, with a stone 1x3x6 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

S4 | S3
1933

From this cor. Jerry A. Jacka's house bears N. 55°E., about 30 chs. dist. near and west of the Black Canyon highway.

40.90 Top of bench, 6 ft. high, bears NE. and SW. Over level bottom land.

55.20 Asc. 28 ft. over gradual NW. slope.

SUBDIVISION OF T. 6 N., R. 2 E.

BOOK 4068

Chains

80.20 The cor. of secs. 3, 4, 9 and 10.
 Land, rolling.
 Soil, rocky and silt, 4th and 2nd rate.
 Timber, palo verde, ironwood and mesquite.
 Undergrowth, greasewood, catclaw, ocotillo and buck thorn.

From temp. cor. of secs. 28, 29, 32 and 33.
 S.0°02'W., on random line, bet. secs. 32 and 33.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

84.56 A pt. 12 lks. S.89°48'W., of cor. of secs. 32 and 33, on
 S. bdy. of Tp., hereinbefore described.

Thence


N.0°02'E., on true line, bet. secs. 32 and 33.

Over rolling land, through scattering timber and dense undergrowth.

2.55 Telephone line (8 wires), bears N.6 $\frac{3}{4}$ °W., and S.6 $\frac{3}{4}$ °E.


4.10 Old road, bears N.20°W., and S.20°E.

44.56 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in
 the ground to bedrock, with a stone 6x6x8 ins. marked
 with a cross (+) deposited at base, and in a mound of
 stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked



Continue over rolling land.

84.56 Intersect the sectional correction line at a point 80.00
 chs. West of the cor. of secs. 27, 28, 33 and 34. At
 point of intersection,
 Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in
 the ground to bedrock, with a stone 6x6x8 ins. marked
 with a cross (+) deposited at base, and in a mound of
 stone to top, for cor. of secs. 28, 29, 32 and 33, with
 brass cap marked



1933

No suitable bearing trees available.

Land, rolling.
 Soil, rocky 4th. rate.
 Timber, palo verde.
 Undergrowth, greasewood, cactus and catclaw

SUBDIVISION OF T. 6 N., R. 2 E.

Chains

From cor. of secs. 27, 28, 33 and 34.


West, on sectional correction line, bet. secs. 28 and 33.

Over rolling land, through scattering timber and dense undergrowth.

4.30 Wash, 15 lks. wide, course SW. (from N.80°E.)

22.80 Wash, 50 lks. wide, 7 ft. deep, course SW.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for 1/4 sec. cor., with brass cap marked



1933

Continue over rolling land.


80.00 The cor. of secs. 28, 29, 32 and 33.

Land, rolling,
Soil, rocky, 4th rate.
Timber, palo verde, ironwood and mesquite.
Undergrowth, greasewood, cactus and catclaw.

N.0°02'E., bet. secs. 28 and 29.

Over rolling land, through scattering timber and dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for 1/4 sec. cor., with brass cap marked




1933

Continue over rolling land.

64.00 Old road, bears NE. and SW.

74.00 Earth tank, bears E. about 2 chs. dist.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 20, 21, 28 and 29, with brass cap marked



1933

SUBDIVISION OF T. 6 N., R. 2 E.

BOOK 4068

chains

No suitable bearing trees available.

Land, rolling.

Soil, rocky, 4th rate.

Timber, palo verde, ironwood and mesquite.

Undergrowth, greasewood, cactus and ocotillo.

East, on random line, bet. secs. 21 and 28.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.00 A pt. 7 lks. N. of cor. of secs. 21, 22, 27 and 28.

Thence,

N.89°57'W., on true line, bet. secs. 21 and 28.

Over rolling land, through scattering timber and dense undergrowth.

18.00 Asc. E. slope of butte.

23.50 Top of butte, 35 ft. high. Desc. 35 ft.

30.00 Change to NE. slope. Asc. 65 ft.

39.40 Spur, slopes N. Over NW. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., on bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, 4 ft. base, and 3 ft. high, for $\frac{1}{4}$ sec. cor. with brass cap marked
$$\frac{1}{4} \begin{array}{l} S 21 \\ S 28 \end{array}$$

1933

Desc. 57 ft. over NW. slope.

45.00 Change to NE. slope.; asc. 57 ft.

56.40 Low spur, slopes N. Desc. 54 ft. over W. slope.

61.50 Bottom of desc. Over rolling land.

73.20 Old road, bears NE. and SW.

80.00 The cor. of secs. 20, 21, 28 and 29.

Land, rolling.

Soil, rocky 4th rate.

Timber, palo verde, ironwood and mesquite.

Undergrowth, greasewood, catclaw and cactus.

N.0°02'E., bet. secs. 20 and 21.

Over rolling land, through scattering timber and dense undergrowth.


35.30 Power line (3 wires), bears N.88°E., and W.

SUBDIVISION OF T. 6 N., R. 2 E.

chains


35.40 Old road, bears N.88°E., and W.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for 1/4 sec. cor. with brass cap marked



Continue over rolling land.

80.00 Set an iron post, 3 ft. long, 2 in. in diam., 18 ins. in the ground to bedrock, with a stone 2x3x5 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 16, 17, 20 and 21, with brass cap marked



1933

No suitable bearing trees available.

Land, rolling.
Soil, rocky, 4th rate.
Timber, palo verde, ironwood and mesquite.
Undergrowth, greasewood, cactus and catclaw.

S.89°57'E., on random line, bet. secs. 16 and 21.

40.00 Set temp. 1/4 sec. cor.


80.00 A pt. 12 lks. N. of cor. of secs. 15, 16, 21 and 22.

Thence.

N.89°52'W., on true line, bet. secs. 16 and 21.

Over rolling land, through scattering timber and dense Undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 22 ins. in the ground to bedrock, with a stone 2x2x4 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for 1/4 sec. cor. with brass cap marked



1933

Continue over rolling land.

80.00 The cor. of secs. 16, 17, 20 and 21.

Land, rolling.
Soil, rocky, 4th rate.

Chains


Timber, palo verde and mesquite.
Undergrowth, greasewood, catclaw, ocotillo and cactus.

N.0°02'E., bet. secs. 16 and 17.

Over rolling land, through scattering timber and dense undergrowth.

22.80 Top of bench, bears NE. and SW.; desc. 10 ft. to river bottom.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked




raise a mound
of stone, 3 ft. base, 2 ft. high, W. of cor.

continue over level land.

46.70 New River wash (dry), 150 lks. wide, course SW.

Over level land.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in the ground to bedrock, with a stone 2x4x6 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 8, 9, 16 and 17, with brass cap marked.



1933

No suitable bearing trees available.

A bench mark of the U.S. Geological Survey, marked elevation 1832 ft., datum P R S C 4, bears N.18°15'W., 5.01 chs. dist.; an iron post, 3 ins. diam., firmly set and projecting 12 ins. above ground.

Land, rolling, and level.
Soil, rocky 4th. rate.
Timber, palo verde, mesquite and ironwood.
Undergrowth, greasewood, ocotillo and catclaw.

S.89°52'E., on a random line, bet. secs. 9 and 16.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.02 A pt. 7 lks. S. of cor. of secs. 9, 10, 15 and 16.

Thence

N.89°55'W., on true line, bet. secs. 9 and 10.

Over rolling land, through scattering timber and dense undergrowth.

SUBDIVISION OF T. 6 N., R. 2 E.

Chains.

39.00

Top of bench, bears NE. and SW.

40.01

Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 2x2x4 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ $\frac{S 9}{S16}$

1933

Desc. 12 ft. over gradual W. slope.

47.92

Enter level land, bears N. and S.

57.42

New River wash (dry), $1\frac{1}{2}$ chs. wide, course SW. Over level land.

80.02

The cor. of secs. 8, 9, 16 and 17.

Land, rolling and level.
Soil, rocky 4th. rate.
Timber, palo verde, mesquite and ironwood.
Undergrowth, greasewood, cactus, catclaw and ocotillo.

N.0°02'E., bet. secs. 8 and 9.

Over gently rolling land, through scattering timber and dense undergrowth.

16.00

Top of bench, 25 ft. high, bears NE. and SW. Over rolling land.

40.00

Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S8 | S9

1933

Continue over rolling land.

80.00

Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 4, 5, 8 and 9, with brass cap marked

T6N R2E
S5 | S4
S8 | S9

1933

No suitable bearing trees available.

Land, rolling.
Soil, rocky 4th. rate.
Timber, palo verde, mesquite and ironwood.
Undergrowth, greasewood, cactus, catclaw and ocotillo.

SUBDIVISION OF T. 6 N., R. 2 E.

Chains

S. 89°55'E., on a random line, bet. secs. 4 and 9.

40.00 Set temp. 1/4 sec. cor.

79.96 A pt. 12 lks. N., of the cor. of secs. 3, 4, 9 and 10.

Thence

N. 89°50'W., on true line, bet. secs. 4 and 9.

Over rolling land, through scattering timber and dense undergrowth.

5.00 Desc. 34 ft. over NW. slope.

10.50 Top of bench, bears N. 20°E. and SW.

12.00 Enter level land, bears NE. and SW.

37.30 New River wash (dry), 2 chs. wide, 6 ft. deep, course S.

39.98 Set an iron post, 3 ft. long, 1 in. in diam. 18 ins. in the ground to bedrock, with a stone 2x3x4 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for 1/4 sec. cor., with brass cap marked

$$\begin{array}{r} \frac{1}{4} \text{ S } 4 \\ \hline \text{S } 9 \\ 1933 \end{array}$$

Over bottom land.

48.00 Asc. 35 ft.

49.00 Top of bench, bears NE. and SW.

79.96 The cor. of secs. 4, 5, 8, and 9.

Land, level and rolling.
Soil, silt and rocky, 2nd and 4th rate.
Timber, palo verde, mesquite and ironwood.
Undergrowth, greasewood, cactus, ocotillo and catclaw.

N. 0°08'W., on a random line, bet. secs. 4 and 5.

40.00 Set temp. 1/4 sec. cor.

79.96 A pt. 5 lks. E., of cor. of secs. 4, 5, 32, and 33, on N. bdy. of Tp., which is an iron post, 2 ins. diam. projecting 12 ins. above ground, with brass cap marked and witnessed as described in the official record.

Thence

S. 0°10'E., on true line, bet. secs. 4 and 5.

Over rolling land, through scattering timber and dense undergrowth.

29.26 Wash, 20 lks. wide, course SW.

39.96 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for 1/4 sec. cor., with brass cap marked

$$\begin{array}{r} \frac{1}{4} \\ \hline \text{S5} \text{ | } \text{S4} \\ 1933 \end{array}$$

SUBDIVISION OF T. 6 N., R. 2 E.

Chains

from which
A palo verde, 6 ins. diam., bears S. 66°E., 126 lks.
dist. mkd. $\frac{1}{4}$ S4 BT.

A palo verde, 12 ins. diam., bears S. 40°W., 60 lks.
dist., mkd. $\frac{1}{4}$ S5 BT.

Over rolling land.

41.06 Highway, bears N. 30°E., to New River Junction; S. 30°W. to
Marinette.

79.96 The cor. of secs. 4, 5, 8, and 9.

Land, rolling.
Soil, rocky 4th. rate.
Timber, palo verde, mesquite and ironwood.
Undergrowth, greasewood, cactus, ocotillo and catclaw.

From temp. cor. of secs. 29, 30, 31 and 32.

S. 0°01'W., on a random line, bet., secs. 31 and 32.

40.00 Set temp. $\frac{1}{4}$ sec. cor.


84.88 A pt. 12 lks. W., of the cor. of secs. 31 and 32 only,
on S. bdy. of Tp., hereinbefore described.

Thence

N. 0°01'E., on true line, bet. secs. 31 and 32.

Over rolling land, through scattering timber and dense
undergrowth.


44.88 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in
the ground to bedrock, with a stone 6x6x8 ins. marked
with a cross (+) deposited at base, and in a mound of
stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked



Over rolling land.

84.88 Intersect the sectional correction line at a point 80.00
chs. West of the cor. of secs. 28, 29, 32, and 33. At
point of intersection,

Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in
the ground to bedrock, with a stone 3x4x6 ins. marked
with a cross (+) deposited at base, and in a mound of
stone to top, for cor. of secs. 29, 30, 31 and 32, with
brass cap marked



1933

No suitable bearing trees available.

Land, rolling.
Soil, rocky 4th. rate.

SUBDIVISION OF T. 6 N., R. 2 E.

BOOK 4068

chains

Timber, palo verde and mesquite.
Undergrowth, greasewood, giant cacti, ball cholla,
prickly pear and buck horn cactus.

From cor. of secs. 28, 29, 32 and 33,

West, on sectional correction line, bet. secs. 29 and 32.

Over rolling land, through scattering timber and dense
undergrowth.

10.25 Telephone line (8 wires), bears N. and S.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in
the ground to bedrock, with a stone 2x4x6 ins. marked
with a cross (+) deposited at base, and in a mound of
stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4} \begin{array}{r} \text{S } 29 \\ \hline \text{S } 32 \end{array}$$

1933

Over rolling land.

44.70 Old road, bears N. and S.

80.00 The cor. of secs. 29, 30, 31 and 32.

Land, rolling.

Soil, rocky, 4th rate.

Timber, palo verde and mesquite.

Undergrowth, greasewood and cactus.

West, on Sectional Correction Line, bet. secs. 30 and 31.

Over rolling land, through scattering timber and dense
undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in
the ground to bedrock, with a stone 2x2x4 ins. marked
with a cross (+) deposited at base, and in a mound of
stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4} \begin{array}{r} \text{S } 30 \\ \hline \text{S } 31 \end{array}$$

1933

Over rolling land.

56.80 Wash, 1 ch. wide, course S.15°W.

76.16 Intersect the W. bdy. of Tp., at a pt. 5.30 chs. N., of
cor. of secs. 25 and 36, ~~hereinbefore described~~. At pt.
of intersection

Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in
the ground to bedrock, with a stone 4x6x8 ins. marked
with a cross (+) deposited at base, and in a mound of
stone to top, for closing cor. of secs. 30 and 31, with
brass cap marked

SUBDIVISION OF T. 6 N., R. 2 E.

chains

| | |
|-----|-------|
| T6N | |
| R1E | R2E |
| S25 | S30 C |
| | S31 C |

1933

No suitable bearing trees available.

Land, rolling.

Soil, rocky, 4th rate.

Timber, palo verde, ironwood and mesquite.

Undergrowth, greasewood, catclaw and cactus.

From cor. of secs. 29, 30, 31 and 32.

N.0°01'E., bet. secs. 29 and 30.

Over rolling land, through scattering timber and dense undergrowth.

40.00

Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 2x3x5 ins, marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap marked

| | | |
|-----|---------------|-----|
| | $\frac{1}{4}$ | |
| S30 | | S29 |

1933

Over rolling land.

80.00

Set an iron post, 3 ft. long, 2 in. in diam., 20 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 19, 20, 29 and 30, with brass cap marked

| | |
|---------|-----|
| T6N R2E | |
| S19 | S20 |
| S30 | S29 |

1933

No suitable bearing trees available.

Land, rolling

Soil, rocky, 4th rate.

Timber, palo verde, mesquite and ironwood.

Undergrowth, greasewood, catclaw, ocotillo and cactus.

East, on random line, bet. secs. 20 and 29

40.00

Set temp. $\frac{1}{4}$ sec. cor.

79.90

A pt. 7 lks. N., of cor. of secs. 20, 21, 28 and 29.

Thence,

SUBDIVISION OF T. 6 N., R. 2 E.

BOOK 4068

Chains

N.89°57'W., on true line, bet. secs. 20 and 29.

Over rolling land, through scattering timber and dense undergrowth.

20.30 Telephone line (8 wires), bears S.7°E., and N.7°W.

39.95 Set an iron post, 3 ft. long, 1 in. in diam., 22 ins. in the ground to bedrock, with a stone 2x3x5 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
$$\frac{1}{4} \frac{S 20}{S 29}$$

1933

Over rolling land.

79.90 The cor. of secs. 19, 20, 29 and 30.

Land, rolling.

Soil, rocky 4th. rate.

Timber, palo verde, mesquite and ironwood.

Undergrowth, greasewood, catclaw and ocotillo.

West, on true line, bet. secs. 19 and 30.

Over rolling land, through scattering timber and dense undergrowth.

11.40 Old road, bears NE. and SW.

11.80 Top of bench, 10 ft. high, bears NE. and SW.

26.40 Wash, 1 ch. wide, 5 ft. deep, course SW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in the ground to bedrock, with a stone 3x4x6 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
$$\frac{1}{4} \frac{S 19}{S 30}$$

1933

60.50 Wash, 40 lks. wide, 4 ft. deep, course SW.

76.24 Intersect the W. bdy. of the Ep., at a pt. 5.46 chs. N. of cor. of secs. 24 and 25, hereinbefore described. At pt. of intersection

Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for closing cor. of secs. 19 and 30, with brass cap marked.

| | | |
|-----|-----|---|
| T6N | | |
| R1E | R2E | |
| S24 | S19 | C |
| | S30 | C |

1933

SUBDIVISION OF T. 6 N., R. 2 E.

Chains

No suitable bearing trees available.

Land, rolling.
Soil, rocky 4th. rate.
Timber, palo verde, mesquite and ironwood.
Undergrowth, greasewood, catclaw, ocotillo and cactus.

From cor. of secs. 19, 20, 29 and 30,

N.0°01'E., bet. secs. 19 and 20.

Over rolling land, through scattering timber and dense undergrowth.


13.20 Old road, bears NE. and SW.

15.80 Top of bench, 10 ft. high, bears NE. and SW.

33.00 New River wash, 150 lks. wide, 5 ft. deep, course SW.

38.00 Top of bench, 6 ft. high, course NE. and SW.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 2x4x5 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked




Over rolling land.

65.80 Wash, 40 lks. wide, course SW.

79.50 Top of bench, 12 ft. high, bears NE. and SW.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 17, 18, 19 and 20, with brass cap marked



1933

No suitable bearing trees available.

Land, rolling.
Soil, rocky 4th. rate.
Timber, palo verde, mesquite and ironwood.
Undergrowth, greasewood, cactus, catclaw and ocotillo.

S.89°57'E., on a random line, bet. secs. 17 and 20.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.82 A pt. 2 lks. N. of cor. of secs. 16, 17, 20 and 21.

SUBDIVISION OF T. 6 N., R. 2 E.

BOOK 4068

chains

Thence,

N.89°56'W., on true line, bet. secs. 17 and 20.

Over rolling land, through scattering timber and dense undergrowth.

20.42 Old road, bears NE. and SW.

21.82 Top of bench, 12 ft. high, bears NE. and SW.

33.82 New River wash, 150 lks. wide, 5 ft. deep, course SW.

39.91 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor. with brass cap marked

S 17

 $\frac{1}{4}$ S 20

1933

raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.

42.82 Top of bench, 10 ft. high, bears NE. and SW. Over rolling land.

48.67 Telephone line (8 wires); bears N.20°W., and S.20°E.

67.82 Wash, course SW.

79.32 Top of bench, 12 ft. high, bears NE. and SW.

79.82 The cor. of secs. 17, 18, 19 and 20.

Land, rolling.

Soil, rocky, 4th rate.

Timber, palo verde, ironwood and mesquite.

Undergrowth, greasewood, catclaw, ocotillo and cactus.

West, on true line, bet. secs. 18 and 19.

Over rolling land, through scattering timber and dense undergrowth.

3.00 Old road, bears NE. and SW.

21.20 Old road, bears N. and S.

35.00 Top of bench, 12 ft. high, bears N.10°E., and S.10°W.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap marked

S 18

 $\frac{1}{4}$ S 19

1933

52.00 Wash, 60 lks. wide, 6 ft. deep, course SW.

65.00 Highway, N.37°E. to New River Station,; S.37°W., to Marinette.

76.41 Intersect the W. bdy. of Tp., at a pt. 5.41 chs. N. of cor.

SUBDIVISION OF T. 6 N., R. 2 E.

chains

of secs. 13 and 24, hereinbefore described. At point of intersection

Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, with a stone 3x4x6 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for closing cor. of secs. 18 and 19, with brass cap marked

| | |
|-----|-------|
| T6N | |
| R1E | R2E |
| S13 | S18.C |
| | S19 C |

1933

No suitable bearing trees available.

Land, rolling.

Soil, rocky, 4th rate.

Timber, palo verde, ironwood and mesquite.

Undergrowth, greasewood, catclaw and ocotillo.

From cor. of secs. 17, 18, 19 and 20,

N.0°01'E. bet. secs. 17 and 18.

Over rolling land, through scattering timber, and dense undergrowth.

3.60 Old road, bears NE. and SW.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 3x3x5 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap marked

| | |
|-----|-----|
| S18 | S17 |
|-----|-----|

1933

Over rolling land,

66.70 Highway, bears N.31 $\frac{1}{2}$ °E., to New River Station, and S.31 $\frac{1}{2}$ °W. to Marinette.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground, for cor. of secs. 7, 8, 17 and 18, with brass cap marked

| | |
|-----|-----|
| T6N | R2E |
| S7 | S8 |
| S18 | S17 |

1933

of stone, 3 ft. base, 2 ft. high., N. of cor. raise a mound

No suitable bearing trees available.

Land, rolling.

Soil, rocky, 4th rate.

Timber, ironwood, palo verde and mesquite.

Undergrowth, greasewood, ocotillo, catclaw and cactus.

SUBDIVISION OF T. 6 N., R. 2 E.

BOOK 4068

chains

- S.89°56'E., on random line, bet. secs. 8 and 17.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.82 A pt. 7 lks. S., of cor. of secs. 8, 9, 16 and 17.
 Thence,
 N.89°59'W., on true line, bet. secs. 8 and 17.
 Over rolling land, through scattering timber and dense undergrowth.
 10.00 Top of bench, 12 ft. high, bears NE. and SW.
 39.91 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap marked

$$\frac{1}{4} \frac{S.8}{S17}$$

1933

- Over rolling land.
 44.90 Telephone line (8 wires), bears N.4 $\frac{1}{4}$ °E., and S.4 $\frac{1}{4}$ °W.
 71.70 Highway, bears N.31 $\frac{1}{2}$ °E., and S.31 $\frac{1}{2}$ °W.
 79.82 The cor. of secs. 7, 8, 17 and 18.
 Land, rolling.
 Soil, rocky, 4th rate.
 Timber, palo verde, ironwood and mesquite.
 Undergrowth, greasewood, catclaw, ocotillo and cactus.

- West, on true line, bet. sec. 7 and 18.
 Over rolling land, through scattering timber and dense undergrowth.
 12.70 Wash, 40 lks. wide, 6 ft. deep, course SW.
 26.50 Old road, bears NE. and SW.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap marked

$$\frac{1}{4} \frac{S.7}{S18}$$

1933


- Over rolling land.
 59.50 Wash, 40 lks. wide, 6 ft. deep, course SW.
 74.60 Old road, bears NW. and SE.
 76.48 Intersect the W. bdy. of Tp., at a pt. 5.57 chs. N.0°07'E.

SUBDIVISION OF T. 6 N., R. 2 E.

chains

of cor of secs. 12 and 13, hereinbefore described. At pt. of intersection 12 and 17, only.

Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for closing cor. of secs. 7 and 18, with brass cap marked



1933

No suitable bearing trees available.

Land, rolling.

Soil, rocky, 4th rate.

Timber, palo verde, mesquite and ironwood.

Undergrowth, greasewood, ocotillo, catclaw and cactus.


From the cor. of secs. 7, 8, 17 and 18.

N.0°01'E., bet. secs. 7 and 8.

Over rolling land, through scattering timber and dense undergrowth.

40.00

Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for 1/4 sec. cor. with brass cap marked



1933


Over rolling land.

56.60

Wash, 35 lks. wide, 5 ft. deep, course SW.

80.00

Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bedrock, with a stone 3x4x6 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 5, 6, 7 and 8, with brass cap marked



1933

No suitable bearing trees available.

Land, rolling.

Soil, rocky, 4th rate.

Timber, palo verde, mesquite and ironwood.


Undergrowth, greasewood, catclaw, ocotillo and cactus.

| | |
|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Chains | S. 89°59'E., on a random line, bet. secs. 5 and 8. |
| 40.00 | Set temp. $\frac{1}{4}$ sec. cor. |
| 79.86 | A pt. 2 lks. S. of cor. of secs. 4, 5, 8 and 9. |
| | Thence |
| | West, on true line, bet. secs. 5 and 8. |
| | Over rolling land, through scattering timber and dense undergrowth. |
| 23.56 | Highway, bears NE. to New River; SW. to Marinette. |
| 36.46 | Wash, 20 lks. wide, 3 ft. deep, course SW. |
| 39.93 | Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock, with a stone 2x2x5 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked |
| | $\begin{array}{r} \frac{1}{4} \text{ S } 5 \\ \hline \text{S } 8 \\ 1933 \end{array}$ |
| | Over rolling land. |
| 52.66 | Telephone line (8 wires), bears N. 11°W., and S. 11°E. |
| 71.26 | Wash, 25 lks. wide, 4 ft. deep, course S. |
| 77.76 | Wash, 8 lks. wide, course SE. |
| 79.86 | The cor. of secs. 5, 6, 7, and 8. |
| | Land, rolling. |
| | Soil, rocky 4th. rate. |
| | Timber, palo verde, ironwood and mesquite. |
| | Undergrowth, greasewood, catclaw, ocotillo and cactus. |
| | West, on true line, bet. secs. 6 and 7. |
| | Over rolling land, through scattering timber and dense undergrowth. |
| 10.00 | Old road, bears N. and S. |
| 40.00 | Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, with a stone 4x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked |
| | $\begin{array}{r} \frac{1}{4} \text{ S } 6 \\ \hline \text{S } 7 \\ 1933 \end{array}$ |
| | Over rolling land. |
| 56.50 | Wash, 30 lks. wide, 3 ft. deep, course S. 10°W. |
| 59.40 | Old road, bears S. 10°W. and N. 10°E. |

Chains
76.43

Intersect the W. bdy. of Tp., at a pt. 5.55 chs. N., of cor. of secs. 1 and 12, hereinbefore described. At pt. of intersection,

Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for closing cor. of secs. 6 and 7, with brass cap marked



No suitable bearing trees available.

Land, rolling.

Soil, rocky 4th. rate.

Timber, mesquite, ironwood and palo verde.

Undergrowth, greasewood, catclaw, ocotillo and cactus.

From the cor. of secs. 5, 6, 7, and 8,

N. 0°10'W., on a random line, bet. secs. 5 and 6.

40.00 Set temp. $\frac{1}{4}$ sec. cor.


79.96 Intersect the N. bdy. of the Tp., at a pt. 14 lks. E., of cor. of secs. 5, 6, 31 and 32, which is an iron post, 2 ins. diam, projecting 16 ins. above ground, firmly set in ground and mound of stone, with brass cap marked and witnessed as described in the official record.

Thence

S. 0°16'E., on true line, bet. secs. 5 and 6.

Over rolling land, through scattering timber and dense undergrowth.

39.96 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, with a stone 2x3x4 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked



Over rolling land.

78.06 Wash, 8 lks. wide, course SE.

79.96 The cor. of secs. 5, 6, 7, and 8.

Land, rolling.

Soil, rocky 4th. rate.

Timber, mesquite, ironwood and palo verde.

Undergrowth, greasewood, ocotillo, catclaw and cactus.

GENERAL DESCRIPTION.

Land: generally rolling desert, except for areas in the southeastern and northeastern portions where malpais hills stand out. The drainage is southwesterly via Skunk Creek in the extreme southeasterly corner and the New River, through the western part.

Soil: in the rolling areas is a gravelly, sandy loam, of about 1 ft. depth, being of 3rd rate quality. Elsewhere, the formation is malpais, 4th rate.

Timber: chiefly the desert types, of ironwood, mesquite and palo verde.

Undergrowth: greasewood, catclaw, cacti and arrowweed, the latter being especially dense along the banks of the New River.

Roads: the Black Canyon highway, from Phoenix to Prescott, Arizona, crosses through the central part of the Tp., in a meridional direction. The highway from Marinette, Arizona, to New River Station in T. 7 N., R. 2 E., extends through the western part of the township.

Water: Cline's Tank, an earthen reservoir, is in the N.W. $\frac{1}{4}$ of Sec. 22. This is the only water in the township.

Settlement: There is one settler living in Sec. 3 and one settler living in Sec. 10, with improvements consisting of houses, barns, sheds, fences and wells started.

Mineral: no evidence of mineral activity is in evidence.

Industry: the land is suitable for grazing only.

FINAL FIELD TEST.

For continued satisfactory adjustment of the instrument see PRELIMINARY FIELD TEST, page 1, of the field notes of survey of T. 7 N., R. 3W., G. & S.R.E. & M., executed under this group.

244

73

BOOK 4068

CERTIFICATE OF UNITED STATES SURVEYOR

I, Benjamin J. Kinsey, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Arizona bearing date of the 31st day of August, 1933, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, resurveyed all those parts or portions of the South and East boundaries of Township 6 North, Range 2 E. and the East boundary of Township 6 North, Range 1 E. and surveyed all those parts or portions of the subdivision lines of Township 6 North, Range 2 East of the Gila and Salt River Base & Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said resurvey and survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such resurvey and survey. Phoenix, Arizona. April 15th, 1935.

Benjamin J. Kinsey U. S. Surveyor.

APPROVAL

OFFICE OF U. S. SUPERVISOR OF SURVEYS, Denver, Colorado, May 31, 1935.

The foregoing field notes of the resurvey of the South and East boundaries of Township 6 North, Range 2 East and the East boundary of Township 6 North, Range 1 East and of the survey of the subdivision lines of Township 6 North, Range 2 East of the Gila and Salt River Base and Meridian, in the State of Arizona executed by Benjamin J. Kinsey, U. S. Surveyor under his special instructions dated August 31, 1933, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the resurveys and surveys they describe, are hereby approved.

U. S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above-described surveys in has been correctly copied from the original notes on file in this office.

U. S. Supervisor of Surveys.

