

FIELD NOTES

OF THE RESURVEY OF

THIRD STANDARD PARALLEL NORTH thru Part of Range 13 East

and thru Part of Range 12 East

AND OF THE SURVEY OF

EAST BOUNDARY

WEST BOUNDARY

and

SUBDIVISION LINES

of

TOWNSHIP 12 NORTH, RANGE 13 EAST

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

Chas. W. Devendorf, U. S. Cadastral Engineer

and

Benj. J. Mollette, U. S. Transitman

In the capacity of U. S. Surveyors, under Special Instructions dated March 20, 1934, issued by the District Cadastral Engineer to govern surveys included in Group No. 189 Arizona, which were approved by the Commissioner of the General Land Office, April 6, 1934, and Assignment Instructions dated Aug. 1 & 16, 1934.

Resurvey and Survey commenced June 25, 1934

Resurvey and Survey completed September 6, 1934

4076

4076


1A







BOOK 4076

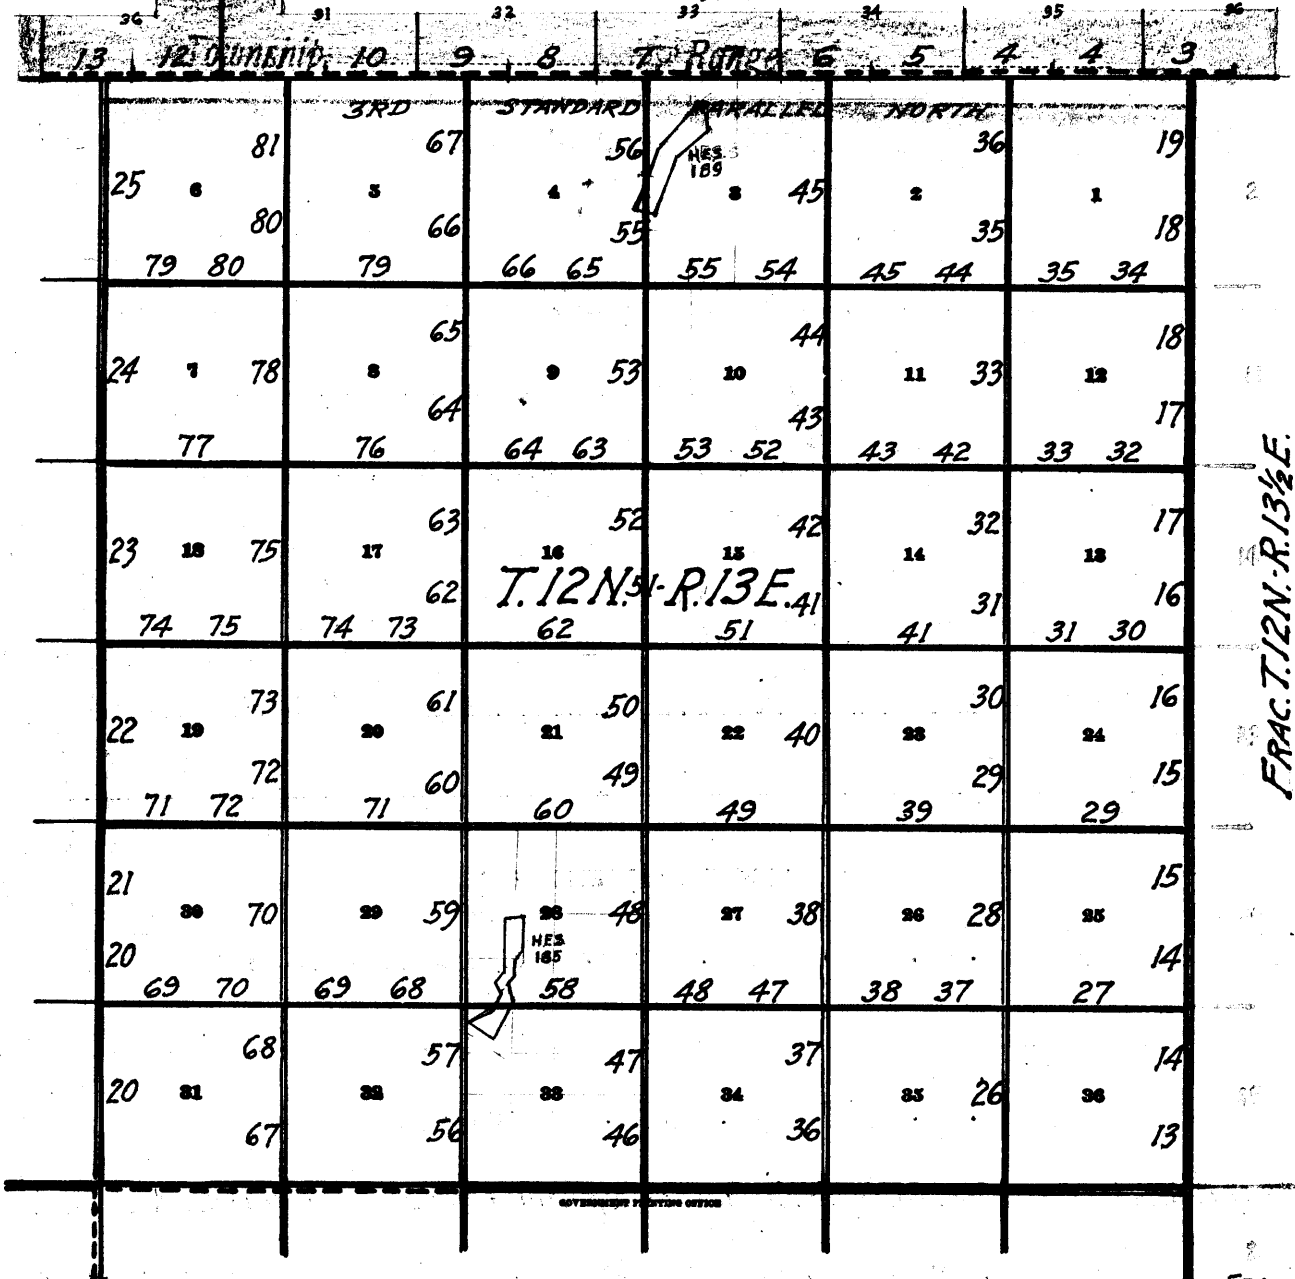INDEX DIAGRAM.

T.13N.-R.12E.

T.13N.-R.13E.



-  Lines of accepted surveys.
-  Lines surveyed under this group.
-  Lines resurveyed under this group.
-  Lines to be surveyed under this group.
-  Lines to be surveyed under Group No. 190.
-  Areas surveyed as per accepted plats on file.

The resurveys and surveys hereinafter described were made with light-mountain solar transits, constructed in accordance with the standard specifications of the General Land Office: Young and Sons Serial No. 8522, used by C. W. Devendorf, U.S.C.E., and Buff & Buff Serial No. 9223, used by Benj. J. Mollette, U. S. T. Instrument No. 8522 has a horizontal circle with a diameter of $4\frac{1}{2}$ ins.: No. 9223 with a diameter of $4\frac{1}{2}$ ins., each with two double verniers placed opposite each other reading to single minutes. The instruments have full vertical circles with diameters of 5 and 4 ins., each with one double vernier reading to single minutes. The telescopes have fixed stadia wires with focal constants of 1.5 and 1.2 lks. and ratios of 1-132. The instruments are equipped with improved Smith solar attachments, radii of latitude arcs $3\frac{1}{2}$ and $2\frac{3}{4}$ ins., and of declination arcs 3.87 and $3\frac{1}{2}$ ins., each with verniers reading to single minutes. The instruments were in good condition and, having been placed in satisfactory adjustment prior to beginning the survey, were approved by the district cadastral engineer on May 18, 1934. All instrumental adjustments were examined before making field tests hereinafter recorded.

The directions of the lines were determined by solar transit method. The measurements were made on the slope with Lallie and Lufkin steel tapes, 5 chs. in length, graduated every link for the first 100 lks. and the balance at intervals of 10 lks. The tapes were tested by comparison with a Lufkin standard and found correct. The vertical angle of each slope measurement was determined with a clinometer in good adjustment; the horizontal equivalents are entered in the field noterecord.

The data furnished with the special instructions gives the geographic position for the SE. cor. of the Tp. as follows: latitude $34^{\circ}22'14''$ N., longitude $110^{\circ}55'39''$ W.

Aug. 7, 1934; at camp at Willow Springs near the $\frac{1}{2}$ sec. cor. of secs. 32 and 33, T. 12 N., R. 13 E., at 10h38m p.m., 1 m.t., using instrument No. 8522, we observe Polaris at western elongation, making two observations each with the telescope in direct and reversed positions and mark the line with a tack in a stake driven firmly into the ground about 5 chs. N. After daybreak we lay off the azimuth of Polaris, $1^{\circ}16'26''$, to the east, and mark the meridian thus determined with a tack in a stake beside the first.

August 8, 1934; at half-hour intervals from 7 to 11 a.m. and from 1 to 5 p.m., app. t., we make proper settings on the arcs of the solar attachments and ascertain that the resulting orientation of the instruments, when compared with the meridian established by Polaris observation, are in error less than $1'30''$.

Latitude of this station and settings used for the surveys throughout the Tp. are based on observations described in Book "A" of this Group.

We repeat the tests of the arcs frequently by noon observation and verify the meridional indications weekly during the period of the survey.

Observed magnetic declination is $14^{\circ}40'E$.

RESURVEY 3RD ST. PAR., N., Thru part of R. 13 E.
S. BDY. OF T. 13 N., R. 13 E.

Chains

The 3rd St. Par., N., through R. 13 E., was surveyed in 1874 by C.B. Foster, U.S.D.S. and resurveyed in 1893 by D. Drummond, U.S.D.S., who reported destroying the corner monuments of the Foster survey. No other resurveys of the line are of record.

The following notes describe a dependent resurvey of the W. $5\frac{1}{2}$ miles of the line, and include descriptions of, and location of, the $\frac{1}{4}$ sec. cors. on the N. bdy. of T. 12 N., R. 13 E. References to old corners are to those established by D. Drummond.

RETRACEMENT FOR RESURVEY.

Beginning at the standard cor. of Tps. 13 N., Rs. 12 and 13 E.;

East, on random line, on S. bdy. of sec. 31.

45.90 A point 41 lks. S. of the standard $\frac{1}{4}$ sec. cor.

86.31 A point 61 lks. S. of the standard cor. of secs. 31 and 32.

Thence

East, on random line, on S. bdy. of sec. 32.

40.37 A point 38 lks. S. of the standard $\frac{1}{4}$ sec. cor.

80.94 A point 58 lks. S. of the standard cor. of secs. 32 and 33.

Thence

East, on random line, on S. bdy. of sec. 33.

40.32 A point 26 lks. S. of the standard $\frac{1}{4}$ sec. cor.

80.68 A point 97 lks. S. of the standard cor. of secs. 33 and 34.

Thence

East, on random line, on S. bdy. of sec. 34.

40.31 A point 47 lks. S. of the standard $\frac{1}{4}$ sec. cor.

80.59 A point 82 lks. S. of the standard cor. of secs. 34 and 35.

Thence

East, on random line, on S. bdy. of sec. 35.

40.29 A point 50 lks. S. of the standard $\frac{1}{4}$ sec. cor.

80.57 A point 87 lks. S. of the standard cor. of secs. 35 and 36.

Thence

East, on random line, on S. bdy. of sec. 36.

40.35 A point 20 lks. S. of the standard $\frac{1}{4}$ sec. cor.

RESURVEY.

The standard $\frac{1}{4}$ sec. cor. of sec. 36, T. 13 N., R. 13 E. is a

RESURVEY 3RD ST. PAR., N., thru Part of R.13 E.

BOOK 4076

Chains							
	stone, 12 x 6 x 6 ins. above ground, firmly set, mkd. SC $\frac{1}{2}$ on N. face, witnessed by a mound of stone S. and from which						
	A dead pine, 16 ins. diam., bears S.3°E., 76 lks. dist., mkd. SC $\frac{1}{4}$ S BT (old BT, marks nearly gone).						
	A pine, 16 ins. diam., bears N.7°W., 37 lks. dist., mkd. SC $\frac{1}{4}$ S BT (old BT).						
	A pine, 4 ins. diam., bears N.31°E., 10 lks. dist., mkd. SC $\frac{1}{4}$ S36 BT (new BT).						
	Thence						
	S.89°43'W., on true line, on S. bdy. of sec. 36 (W. $\frac{1}{2}$).						
	Desc. 195 ft. along rolling N. slope; through medium pine, oak and fir timber and patches of undergrowth.						
8.60	Old fence line, bears S.65°E. and N.65°W.						
14.49	An old standard $\frac{1}{2}$ sec. cor. of the Foster survey, reported not found by the Drummond resurvey, bears 17 lks. N., an old mound of stone with pine trees, 18 ins. diam., N.4 $\frac{1}{2}$ ° E., 21 lks. dist. and S.39 $\frac{1}{2}$ °W., 34 lks. dist., both mkd. SC $\frac{1}{4}$ S BT FSM. I destroy the mound and marks on trees.						
17.70	W. Chevelon Creek, 20 lks. wide, 6 ins. deep, course NE., soon, N.						
21.14	Point of intersection of range line surveyed North bet. Tps. 112 N., Rs. 13 and 13 $\frac{1}{2}$ E.; point for Tp. closing cor. Witness cor. 1.68 chs. S. hereinafter described.						
22.80	Same creek, course S.65°E.; asc. 101 ft. over NE. slope.						
27.70	Change to NW. slope; desc. 98 ft.						
31.30	Same creek, course NE.; asc. 163 ft. over SE. slope.						
40.35	The old standard cor. of secs. 35 and 36, a sandstone, 12 x 9 x 7 ins. above ground, mkd. with 1 groove on E., 5 grooves on W. and SC on N. faces. Beside the stone						
	Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground; and in a mound of stone to top, for standard cor. of secs. 35 and 36, with brass cap mkd.						
	<table border="0"> <tr> <td>T13N</td> <td>R13E</td> </tr> <tr> <td>S</td> <td>C</td> </tr> <tr> <td>S35</td> <td>S36</td> </tr> </table>	T13N	R13E	S	C	S35	S36
T13N	R13E						
S	C						
S35	S36						
	1934						
	from which						
	A pine, 20 ins. diam., bears N.58 $\frac{1}{2}$ °E., 34 lks. dist., dim old marks; new marks: T13N R13E S36 SC BT (old).						
	A pine, 28 ins. diam., bears N.66 $\frac{1}{2}$ °W., 28 lks. dist., dim old marks; new marks: T13N R13E S35 SC BT (old).						
	A pine, 22 ins. diam., bears S.63 $\frac{1}{2}$ °W., 17 lks. dist., dim old marks, which I destroy (old BT).						
	Land: rolling.						
	Soil: gravel adobe, 3rd rate.						
	Timber: pine, oak, fir, aspen.						
	Undergrowth: 2nd growth pine and fir, alder, locust.						

Resurvey 3rd St. Par., N., thru Part of R.13 E.
S. Bdy. of T. 13 N., R.13 E.

Chains

S.89°28'W., on true line, on S. bdy. of sec. 35 (E. 1/2).

Asc. 97 ft. over SE. slope; through medium pine, fir and oak timber and patches of undergrowth.

0.85 Fence, bears N.65°E. and S.65°W.

19.30 Ridge, bears NE. and SW.; along N. slope.

20.74 (Mid-point on N. bdy. of sec. 1) Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, supported in a mound of stone, for 1/2 sec. cor. of sec. 1, only, with brass cap mkd.

1/2 S1
1934

from which

A yellow pine, 30 ins. diam., bears S.56 1/4°E., 57 lks. dist., mkd. 1/2 S1 BT.

A yellow pine, 12 ins. diam., bears S.58 1/2°W., 114 lks. dist., mkd. 1/2 S1 BT.

33.30 Same ridge, bears S.60°E. and N.60°W.; along S. slope.

40.28 The old standard 1/2 sec. cor., a stone, 18 x 12 x 4 ins. above ground, mkd. S0 1/2 on N. face, beside which

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for standard 1/2 sec. cor., with brass cap mkd.

S C
1/2 S35

1934

from which

A pine, 20 ins. diam., bears N.2 1/2°E., 21 lks. dist., mkd. 1/2 S BT; I add marks: SC 1/4 S35 BT (old BT).

A pine, 22 ins. diam., bears South, 45 lks. dist., mkd. 1/2 S BT; I destroy the marks (old BT).

A pine, 28 ins. diam., bears N.76 1/2°W., 83 lks. dist., mkd. SC 1/4 S35 BT. (new BT).

Thence

S.89°17'W., on true line, on S. bdy. of sec. 35 (W. 1/2).

10.00 Same ridge, bears N.60°E. and S.60°W.; asc. slightly.

20.41 Point of intersection of line run N.0°01'W. bet. secs. 1 and 2; closing cor. set at this point hereinafter described.

Asc. 33 ft. along gentle S. slope.

40.29 The old standard cor. of secs. 34 and 35, a limestone, 12 x 8 x 6 ins. above ground, mkd. with 2 notches on E., 4 notches on W. and SC on N. faces, beside which

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for standard cor. of secs. 34 and 35, with brass cap mkd.

RESURVEY 3RD ST. PAR., N., thru PART of R.13 E. BOOK 4076
S. Bdy. of T. 13 N., R.13 E.

Chains

T13N R13E
S C
S34 | S35

1934

from which

- A dead pine, 28 ins. diam., bears N.66 $\frac{1}{2}$ °E., 45 lks. dist., mkd. dimly. (old BT).
A pine, 20 ins. diam., bears N.17 $\frac{1}{2}$ °W., 61 lks. dist., marks partly legible (old BT).
A pine, 12 ins. diam., bears N.3°E., 2 lks. dist., mkd. T13N R13E S35 SC BT. (new BT).
A pine, 10 ins. diam., bears N.62°W., 25 lks. dist., mkd. T13N R13E S34 SC BT. (new BT).

Land: gently rolling.
Soil: gravel adobe, 2nd rate.
Timber: pine, oak, fir, aspen.
Undergrowth: 2nd growth pine and fir, locust.

S.89°30'W., on true line, on S. bdy. of sec. 34 (E. $\frac{1}{2}$).

Desc. 20 ft. along gentle S. slope; through medium pine, oak and fir timber and patches of undergrowth.

- 2.10 Wire fence, bears SE. and NW.
5.90 Telephone line, bears SE. and NW.
6.00 Drain, course SE.; asc. 47 ft. over E. slope.
7.90 Road, bears SE. to Water's Ranger Station and NW.
15.50 Ridge, bears N. and S.; desc. 18 ft. over gentle W. slope.
20.31 (Mid-point on N. bdy. of sec. 2) Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{2}$ sec. cor. of sec. 2, only, with brass cap mkd.

$\frac{1}{2}$ S2

1934

from which

- A yellow pine, 15 ins. diam., bears S.38 $\frac{1}{2}$ °E., 155 lks. dist., mkd. $\frac{1}{2}$ S2 BT.
A yellow pine, 15 ins. diam., bears S.27 $\frac{1}{2}$ °W., 75 lks. dist., mkd. $\frac{1}{2}$ S2 BT.

Over gentle N. slope; asc. 9 ft.

- 32.00 Fence, bears SE. and NW.
33.00 Top of rise, bears SE. and NW.; desc. 18 ft. over NW. slope.
40.28 The old standard $\frac{1}{2}$ sec. cor., a stone, 12 x 10 x 6 ins. above ground, mkd. SC $\frac{1}{2}$ on N. face, beside which
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for standard $\frac{1}{2}$ sec. cor., with brass cap mkd.

RESURVEY 3RD. ST. PAR., N., Thru PART of R.13 E.
S. Bdy. of T. 13 N., R.13 E.

Chains

S C
 $\frac{1}{4}$ S34

1934

from which

A pine, 12 ins. diam., bears N.77 $\frac{1}{2}$ °E., 60 lks. dist.,
marks grown over; remarked $\frac{1}{4}$ S34 SC BT (old BT).

A pine, 20 ins. diam., bears S.51 $\frac{1}{2}$ °E., 33 lks. dist.,
marks grown over (old BT).

A pine, 5 ins. diam., bears N.60 $\frac{1}{2}$ °W., 25 lks. dist.,
mkd. $\frac{1}{4}$ S34 SC BT (new BT).

Thence

S.89°20'W., on true line, on S. bdy. of sec. 34 (W.L.).

Over flat, slopes N.

3.20 Main road, bears N. to Winslow and S.30°W., soon SE. to
Rim road.

5.14 Telephone line, bears N. and S.

11.70 Change to gentle W. slope; desc. 45 ft.

20.23 Point of intersection of line run N.0°01'W. bet. secs. 2
and 3; closing cor. set at this point hereinafter de-
scribed.

22.10 Drain, course N.; asc. 82 ft. over E. slope.

30.20 Ridge, bears S.20°E. and N.20°W.; desc. 56 ft. over SW.
slope.

40.31 The old standard cor. of secs. 33 and 34, a limestone, 16
x 12 x 6 ins. above ground, mkd. with 3 grooves on E.,
3 grooves on W. and SC on N. faces, beside which

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the
ground, supported in a mound of stone, for standard cor.
of secs. 33 and 34, with brass cap mkd.

T13N R13E

S C

S33 | S34

S3

T12NR13E

1934

from which

A yellow pine, 8 ins. diam., bears N.52°E., 81 lks.
dist., dim old marks; remark: T13N R13E S34 SC BT (old)

A yellow pine, 18 ins. diam., bears N.76°W., 8 lks.
dist., dim old marks; remark: T13N R13E S33 SC BT (old).

A yellow pine, 8 ins. diam., bears S.80°E., 57 lks.
dist., dim old marks, which I destroy.

Land: gently rolling.

Soil: gravel adobe, 2nd and 3rd rates.

Timber: pine, oak, fir, aspen, alder.

Undergrowth: 2nd growth pine and fir, locust.

RESURVEY 3RD ST. PAR., N., thru Part of R.13 E.

(S. bdy. of T.13 N., R.13 E.)

BOOK 4076

Chains	
	S.88°59'W., on true line, on S. bdy. of sec. 33 (E. $\frac{1}{2}$).
	Desc. 25 ft. over SW. slope; through medium growth of oak, pine and fir timber and patches of undergrowth.
1.30	Drain, course NW.; asc. 31 ft. over NE. slope.
5.00	Short spur, slopes NW.; desc. 27 ft. over W. slope.
8.40	Drain, course N.; asc. 63 ft. over E. slope.
13.20	Short spur, slopes N.; desc. 111 ft. over W. slope.
19.10	Road, bears N.30°E. and S.30°W.
19.91	(Mid-point on N. bdy. of sec. 3) Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 3, only, with brass cap mkd.
	<u>$\frac{1}{4}$ S3</u>
	1934
	from which
	A pine, 14 ins. diam., bears S.17 $\frac{1}{2}$ °E., 54 lks. dist., mkd. $\frac{1}{4}$ S3 BT.
	An aspen, 6 ins. diam., bears S.60 $\frac{1}{2}$ °W., 150 lks. dist., mkd. $\frac{1}{4}$ S3 BT.
	Desc. 20 ft. over W. slope.
20.30	Hart Canyon, stream, 10 lks. wide, 4 ins. deep, in channel, 40 lks. wide, course N.20°E.; asc. 126 ft. over E. slope.
40.37	The old standard $\frac{1}{4}$ sec. cor., a sandstone, 16 x 12 x 4 ins. above ground, mkd. SC $\frac{1}{4}$ on N. face, beside which
	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for standard $\frac{1}{4}$ sec. cor., with brass cap mkd.
	S C
	<u>$\frac{1}{4}$ S33</u>
	1934
	from which
	A pine, 14 ins. diam., bears N.44 $\frac{1}{2}$ °E., 86 lks. dist., mkd. SC $\frac{1}{4}$ S BT. (old BT).
	A pine, 26 ins. diam., bears S.22°W., 60 lks. dist., mkd. SC $\frac{1}{4}$ S BT. I destroy the marks (old BT).
	A pine, 8 ins. diam., bears N.56 $\frac{1}{2}$ °W., 17 lks. dist., mkd. $\frac{1}{4}$ S33 SC BT (new BT).
	Thence
	S.89°38'W., on true line, on S. bdy. of sec. 33 (W. $\frac{1}{2}$).
	Over gentle N. slope.
13.46	An unidentified cor. bears 6 lks. S., an unmarked limestone in a mound of stone, from which a pine, 24 ins. diam., bears S.60°W., 90 lks. dist., mkd. T12NR13ES4 APCM.
19.53	Point of intersection of line run N.0°02'W. bet. secs. 3

RESURVEY 3RD. ST. PAR., N., thru Part of R.13 E.
(S.Bdy. of T.13 N., R.13 E.)

Chains	<p>and 4; closing cor. set at this point hereinafter described.</p> <p>28.50 Low rise, bears N. and S.; desc. 15 ft. over W. slope.</p> <p>37.00 Change to gentle S. slope.</p> <p>40.32 The old standard cor. of secs. 32 and 33, a limestone, 14 x 8 x 6 ins. above ground, with dim marks on N. face, beside which</p> <p>Set an iron post, 3 ft. long, 2 ins. diam., 22 ins. in the ground, supported in a mound of stone, for standard cor. of secs. 32 and 33, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T13N</td><td>R13E</td></tr> <tr><td>S</td><td>C</td></tr> <tr><td>S32</td><td>S33</td></tr> <tr><td colspan="2">S4</td></tr> <tr><td colspan="2">T12NR13E</td></tr> <tr><td colspan="2">1934</td></tr> </table> <p>from which</p> <p>A yellow pine, 24 ins. diam., bears N.79$\frac{1}{2}$°E., 92 lks. dist., mkd. T13N R13E S33 BT. I add marks SC ahead of "BT" (old BT).</p> <p>A yellow pine, 30 ins. diam., bears N.61$\frac{1}{2}$°W., 108 lks. dist., mkd. T13N R13E S32 BT. I add marks SC ahead of "BT". (old BT).</p> <p>A yellow pine, 14 ins. diam., bears S.42$\frac{1}{2}$°W., 35 lks. dist., marks partly grown over. I destroy marks(old).</p> <p>Land: rolling. Soil: gravel adobe, 3rd rate. Timber: pine, oak, fir, aspen. Undergrowth: 2nd growth pine and fir, locust, scrub oak.</p> <hr/> <p>S.89°43'W., on true line, on S. bdy. of sec. 32 (E.$\frac{1}{2}$).</p> <p>Over gentle S. slope; through medium pine, fir and oak timber and medium undergrowth.</p> <p>10.20 Low rise, bears S.25°E. and N.25°W.; desc. 27 ft. over W. slope.</p> <p>19.10 (Mid-point on N. bdy. of sec. 4) Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for standard $\frac{1}{4}$ sec. cor., with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>$\frac{1}{4}$</td><td>S4</td></tr> <tr><td colspan="2">1934</td></tr> </table> <p>from which</p> <p>A yellow pine, 12 ins. diam., bears S.56$\frac{1}{4}$°E., 107 lks. dist., mkd. $\frac{1}{4}$ S4 BT.</p> <p>A yellow pine, 20 ins. diam., bears S.64$\frac{1}{2}$°W., 28 lks. dist., mkd. $\frac{1}{4}$ S4 BT.</p> <p>Desc. 71 ft. over W. slope.</p> <p>24.70 Drain, course S.60°W.; asc. 65 ft. along S. slope.</p> </div></div>	T13N	R13E	S	C	S32	S33	S4		T12NR13E		1934		$\frac{1}{4}$	S4	1934	
T13N	R13E																
S	C																
S32	S33																
S4																	
T12NR13E																	
1934																	
$\frac{1}{4}$	S4																
1934																	

RESURVEY 3RD ST. PAR., N., thru Part of R.13 E.

(S.Bdy. of T.13 N., R.13 E.)

BOOK 4076

Chains	
37.40	Change to SW. slope; desc. 40 ft.
40.57	The old standard $\frac{1}{4}$ sec. cor. of sec. 32, a limestone, 10 x 7 x 4 ins. above ground, mkd. $\frac{1}{4}$ SC on N. face, beside which Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for standard $\frac{1}{4}$ sec. cor., with brass cap mkd. $\begin{array}{c} S C \\ \frac{1}{4} S 32 \\ 1934 \end{array}$ from which A pine, 16 ins. diam., bears S. $51\frac{1}{2}^{\circ}$ W., 10 lks. dist., mkd. SC $\frac{1}{4}$ S BT; I destroy the marks (old BT). A pine, 14 ins. diam., bears N. $68\frac{1}{4}^{\circ}$ W., 10 lks. dist., mkd. dimly; I Re-mark: $\frac{1}{4}$ S32 SC BT (old BT). A pine, 16 ins. diam., bears N. $75\frac{1}{2}^{\circ}$ E., 10 lks. dist., mkd. $\frac{1}{4}$ S32 SC BT (new BT). Thence S. $89^{\circ}27'$ W., on true line, on S. bdy. of sec. 32 (W. $\frac{1}{2}$). Desc. 39 ft. over SW. slope. 2.20 Short spur, slopes SW.; desc. 185 ft. over W. slope. 8.90 Bear Creek, 25 lks. wide, 4 ins. deep, in channel, 60 lks. wide, course N.; asc. 189 ft. over E. slope. 15.80 Short spur, slopes NE.; desc. 24 ft. along N. slope. 18.42 Point of intersection of line run N. $0^{\circ}02'$ W. bet. secs. 4 and 5; closing cor. set at this point hereinafter described. 20.50 Change to NE. slope; asc. 147 ft. 29.40 Short spur, slopes N.; desc. 67 ft. over NW. slope. 36.30 Ravine, course NE.; asc. 56 ft. over SE. slope. 40.37 The old standard cor. of secs. 31 and 32, a limestone, 10 x 6 x 4 ins. above ground, mkd. with 1 groove on W., 5 grooves on E. and SC on N. faces, beside which Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for standard cor. of secs. 31 and 32, with brass cap mkd. $\begin{array}{c} T13N R13E \\ S C \\ S31 S32 \\ S5 \\ T12NR13E \\ 1934 \end{array}$ from which A pine, 15 ins. diam., bears N. 67° E., 31 lks. dist., mkd. T13N R13E S32 BT (old BT). A pine, 12 ins. diam., bears N. $52\frac{1}{2}^{\circ}$ W., 37 lks. dist., mkd. T13N R13E S31 BT (old BT).

RESURVEY 3RD ST. PAR., N., thru Part of R.13 E.
(S. bdy. of T.13 N., R.13 E.).

Chains

A pine, 15 ins. diam., bears S. $82\frac{1}{2}^{\circ}$ W., 23 lks. dist., marks partly grown over. I destroy the marks (old BT).

Land: rolling.

Soil: gravel adobe, 3rd rate.

Timber: pine, oak, fir, aspen.

Undergrowth: 2nd growth pine and fir, locust, scrub oak.

S. $89^{\circ}43'$ W., on true line, on S. bdy. of sec. 31 ($E\frac{1}{2}$).

Asc. 36 ft. over SE. slope; through medium growth of pine, oak and fir timber and patches of undergrowth.

8.20 Ridge, bears N. and S.; desc. 49 ft. over W. slope.

17.92 (Mid-point on N. bdy. of sec. 5) Set an iron post, 3 ft. long, $\frac{1}{4}$ in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 5, only, with brass cap mkd.

$\frac{1}{4}$ S5
1934

from which

A pine, 9 ins. diam., bears S. $41\frac{1}{2}^{\circ}$ E., 108 lks. dist., mkd. $\frac{1}{4}$ S5 BT.

A pine, 14 ins. diam., bears S. $56\frac{1}{4}^{\circ}$ W., 126 lks. dist., mkd. $\frac{1}{4}$ S5 BT.

Desc. 12 ft. over W. slope.

19.20 Swale, 1 ch. wide, drains N. 30° W., soon NE.; asc. 12 ft.

21.30 Short spur, slopes N.; desc. 9 ft.

23.70 Drain, course NE.; asc. 51 ft. over SE. slope.

33.00 Spur, slopes NE.; desc. 12 ft.

40.41 The old standard $\frac{1}{4}$ sec. cor., a limestone, 10 x 8 x 8 ins. above ground, mkd. SC $\frac{1}{2}$ on N. face, beside which

Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, supported in a mound of stone, for standard $\frac{1}{4}$ sec. cor., with brass cap mkd.

S C
 $\frac{1}{4}$ S31

1934

from which

A pine, 9 ins. diam., bears N. $26\frac{1}{2}^{\circ}$ E., 20 lks. dist., mkd. $\frac{1}{4}$ S31 SC BT. (New BT).

A pine, 18 ins. diam., bears N. $24\frac{1}{2}^{\circ}$ E., 6 lks. dist., no marks on chopped blaze (old BT).

A pine, 16 ins. diam., bears S. $51\frac{1}{2}^{\circ}$ E., 56 lks. dist., no marks on chopped blaze (old BT).

A pine, 6 ins. diam., bears N. 75° W., 65 lks. dist., mkd. $\frac{1}{4}$ S31 SC BT. (New BT).

Thence

RESURVEY 3RD ST. PAR., N., thru Part of R.13 E.
(S. Bdy. of T. 13 N., R.13 E.)

BOOK 4076

Chains

S.89°28'W., on true line, on S. bdy. of sec. 31 (W. 1/2).

Desc. 79 ft. over W. slope.

8.00 Drain, course N.; asc. 7 ft.

9.60 Low spur, slopes N.; desc. 135 ft. over W. slope.

16.80 Narrow ravine, course N.; asc. 27 ft. over E. slope.

17.38 Point of intersection of line run N.0°03'W., bet. secs. 5 and 6; closing cor. set at this point hereinafter described.

Asc. 132 ft. over E. slope.

24.40 Spur, slopes N.; desc. 252 ft. over W. slope.


33.10 Beaver Creek, 30 lks. wide, 5 ins. deep, course N., asc. 159 ft. over E. slope.

36.60 Short, rugged spur, slopes SE.; desc. 46 ft. over SW. slope.

40.90 Change to SE. slope; asc. 30 ft.

45.90 The old standard cor. of Tps. 13 N., Rs. 12 and 13 E., a sandstone, 12 x 8 x 6 ins. above ground, mkd. with 6 grooves on each of E., W. and N. faces, beside which

Set an iron post, 3 ft. long, 3 ins. diam., 18 ins. in the ground, and in a mound of stone to top, for standard cor. of Tps. 13 N., Rs. 12 and 13 E., with brass cap mkd.



from which.

A pine, 14 ins. diam., bears N.47 1/4°E., 56 lks. dist., old marks dim; I re-mark: T13N R13E S31 SC BT (old).

A pine, 18 ins. diam., bears N.89 1/4°W., 83 lks. dist., old marks dim; I re-mark: T13N R12E S36 SC BT (old).

Land: rolling and broken.

Soil: gravel adobe, 3rd rate.

Timber: pine, oak, fir, aspen, alder.

Undergrowth: 2nd growth pine and fir, locust, fern.

RESURVEY 3RD ST. PAR., N., thru Part of R.12 E.
(S. bdy. of T.13 N., R.12 E.)

The 3rd Standard Parallel, N., through R.12 E., was surveyed in 1874 by C.B. Foster, U.S.D.S., and resurveyed in 1893 by D. Drummond, U.S.D.S., who reported destroying the monuments of the Foster survey. No other resurveys are of record.

The following notes describe the dependent resurvey of the S. bdy. of sec. 36 and include a description of the 1/2 sec. cor. of sec. 6, only, of T.12 N., R.13 E.

RESURVEY 3RD ST. PAR., R., thru Part of R. 12 E.
(S. Bdy. of T. 13 N., R. 12 E.)

Chains

From the old standard cor. of secs. 35 and 36,

N. $89^{\circ}30'E.$, on random line, on S. bdy. of sec. 36.

40.41 A point 13 lks. S. of the standard $\frac{1}{4}$ sec. cor.

80.72 Intersect the standard cor. of Tps. 13 N., Rs. 12 and 13 E., hereinbefore described.

Thence

S. $89^{\circ}41'W.$, on true line, on S. bdy. of sec. 36 ($E.\frac{1}{2}$).

Asc. 147 ft. over SE. slope; through medium pine, fir and oak timber and patches of undergrowth.

10.70 Trail, on ridge, bears N. $60^{\circ}E.$ and S. $70^{\circ}W.$

11.48 (40.00 chs. in Westing from the NE. cor. of sec. 6) Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. of sec. 6, only, with brass cap mkd.

$\frac{1}{4}$ S6
1934

from which

A pine, 10 ins. diam., bears S. $41^{\circ}E.$, 62 lks. dist., mkd. $\frac{1}{4}$ S6 BT.

A pine, 14 ins. diam., bears S. $37^{\circ}W.$, 91 lks. dist., mkd. $\frac{1}{4}$ S6 BT.

Along gentle N. slope.

24.20 Begin descent of 78 ft. along N. slope.

30.30 Short spur, slopes NW.; desc. 175 ft. over W. slope.

36.60 Gentry Creek, 8 lks. wide, 4 ins. deep, in channel, 40 lks. wide, course NW., soon NE.; asc. 127 ft. over SE. slope.

40.31 The Drummond standard $\frac{1}{4}$ sec. cor., a stone, 15 x 8 x 7 ins. above ground, mkd. SC $\frac{1}{4}$ on N. face, beside which

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for standard $\frac{1}{4}$ sec. cor., with brass cap mkd.

S C
 $\frac{1}{4}$ S36

1934

from which

A pine, 17 ins. diam., bears N. $42\frac{1}{2}^{\circ}E.$, 55 lks. dist., mkd. SC $\frac{1}{4}$ BT (old BT).

A pine, 12 ins. diam., bears S. $27^{\circ}E.$, 24 lks. dist., marks grown over (old BT).

A pine, 18 ins. diam., bears N. $51\frac{1}{2}^{\circ}W.$, 103 lks. dist., mkd. $\frac{1}{4}$ S36 SC BT (new BT).

Thence

S. $89^{\circ}19'W.$, on true line, on S. bdy. of sec. 36 ($W.\frac{1}{2}$).

RESURVEY 3rd Std. Par. N., thru Part of R. 12 E.
(S. Bdy. of T. 13 N., R. 12 E.)

13
BOOK 4076

Chains	
0.30	Short ravine, course S. 80°E.; asc. 180 ft. over SE slope.
8.15	An old mound of stone bears N. 33¼°W., 33 lks. dist., an old Foster corner with 2 chopped bearing trees.
10.83	Point of intersection of the range line surveyed North bet. Tps. 12 N., Rs. 12 and 13 E.; closing Tp. cor. set at this point as hereinafter described.
	Asc. 58 ft. along N. slope.
23.30	Spur, slopes S. 85°E.; desc. 18 ft.
36.50	Drain, course SE.; asc. 34 ft. over E. slope.
40.41	The Drummond standard cor. of secs. 35 and 36, a sandstone 20x12x6 ins. above ground, firmly set, mkd. with 5 grooves on W., 1 groove on E. and SC on N. faces, from which
	A pine, 16 ins. diam., bears N. 49°E., 63 lks. dist., proper marks partly grown over (old BT)
	A pine, 14 ins. diam., bears S. 70¾°W., 27 lks. dist., marks grown over, partly exposed by chopping in past (old BT).
	A pine, 30 ins. diam., bears N. 74¼°E., 28 lks. dist., marks grown over, partly exposed by chopping in past (old BT).
	A pine, 22 ins. diam., bears N. 21¼°W., 108 lks. dist., marks grown over (old BT).
	Land: rolling. Soil: rocky adobe, 3rd rate. Timber: pine, fir, oak. Undergrowth: 2nd growth pine and fir, locust.
SURVEY EAST BOUNDARY OF T. 12 N., R. 13 E.	
Beginning at the cor. of Ts. 11 and 12 N., Rs. 13 and 13½ E., established under this Group as described in Book "A".	
North, bet. secs. 36 and 35.	
Asc. 12 ft. over gentle S. slope; thru medium pine and fir timber and dense undergrowth.	
10.00	Low rise, bears SE. and W.; desc. 75 ft. over NE slope.
36.20	Change to NW. slope; desc. 15 ft.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor., with brass cap mkd.
from which	
	A pine, 10 ins. diam., bears S. 68¾°E., 2 lks. dist., mkd. ¼ S35 BT
	A Douglas fir, 14 ins. diam., bears N. 64¼°W., 42 lks. dist., mkd. ¼ S36 BT.

Chains.

Desc. 40 ft. over NW. slope.

42.80 Ravine, course N. 20°E.; asc. 58 ft. along E. slope.

56.80 Change to N. slope; desc. 20 ft.

69.00 Wash, 10 lks. wide, course E.; asc. 6 ft.

71.00 Over flat, bears E. and W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground, and in a mound of stone to top, for cor. of secs. 25 and 36 of T. 12 N., R. 13 E., and secs. 26 and 35 of Frac. T. 12 N., R. 13½E., with brass cap mkd.

T12N	
R13E	R13½E
S25	S26
S36	S35
1934	

from which

A yellow pine 16 ins. diam., bears N. 66¼°E., 33 lks. dist. mkd. T12N R13½E S26 BT.

A yellow pine, 5 ins. diam., bears S. 13°E., 12 lks. dist. mkd. T12N R13½E S35 BT

A yellow pine, 4 ins. diam., bears S. 38°W., 44 lks. dist. mkd. T12N R13E S36 BT

A yellow pine, 20 ins. diam., bears N. 29¼°W., 25 lks. dist. mkd. T12N R13E S25 BT.

Land: rolling.

Soil: limestone, black adobe, 3rd rate.

Timber: pine, fir, aspen, oak.

Undergrowth: 2nd growth pine and fir, locust.

North, bet. secs. 25 and 26.

Over flat; thru medium pine, fir and aspen timber and medium undergrowth.

5.00 Leave flat; desc. 35 ft. over NE. slope.

12.70 Wash, 10 lks. wide, course S. 65°E.; asc. 65 ft. over SW. slope.

21.70 Head of short ravine, course S. 20°W., bears 70 lks. W.

25.50 Road, bears E. and W.; desc. slightly, over E. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor., with brass cap mkd.

¼	
S25	S26
1934	

from which

A pine, 7 ins. diam., bears N. 67¼°E., 4 lks. dist., mkd. ¼ S26 BT

SURVEY EAST BOUNDARY OF T. 12 N., R. 13 E.

Chains

A pine; 8 ins. diam., bears S. 77 $\frac{1}{2}$ ° W., 19 lks. dist.,
mkd. $\frac{1}{4}$ S25 BT


45.00 Change to NE. slope; desc. 35 ft.

60.30 Drain, course SE.; asc. 43 ft. over SE. slope

63.50 Road, bears N. 60° E. and S. 60° W.

77.00 Low ridge, bears N. 25° E. and S. 25° W.; desc. 6 ft.

80.00 Set an iron post, 3 ft. long, 2 ins. diam. 28 ins. in the
ground, for cor. of secs. 24 and 25 of T. 12 N., R. 13 E.
and secs. 23 and 26 of Frac. T. 12 N., R. 13 $\frac{1}{2}$ E., with
brass cap mkd.



from which

A yellow pine, 18 ins. diam. bears N. 23 $\frac{3}{4}$ ° E., 37 lks.
dist., mkd. T12N R13 $\frac{1}{2}$ E S23 BT

A yellow pine, 10 ins. diam., bears S. 29 $\frac{1}{2}$ ° E., 48 lks.
dist., mkd. T12N R13 $\frac{1}{2}$ E S26 BT

A yellow pine, 8 ins. diam., bears S. 14 $\frac{1}{2}$ ° W., 88 lks.
dist., mkd. T12N R13E S25 BT

A yellow pine, 8 ins. diam., bears N. 55 $\frac{3}{4}$ ° W., 81 lks.
dist., mkd. T12N R13E S24 BT

Land: rolling.
Soil: limestone, adobe, 3rd rate.
Timber: pine, oak, fir, aspen.
Undergrowth: 2nd growth pine and fir, locust.

North, bet. secs. 24 and 23

Desc. 12 ft. along W. slope; thru medium pine, fir and
aspen timber and patches of undergrowth.

15.00 Change to E. slope; desc. slightly.


23.20 Ravine, course N. 5° W.

23.70 Same ravine, course N. 5° E.

24.20 Same ravine, course N. 20° W.; desc. 18 ft.

30.70 Same ravine, course N. 25° E.; over E. slope

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the
ground, for $\frac{1}{4}$ sec. cor. with brass cap mkd.




from which

A pine, 10 ins. diam., bears S. 88° E., 53 lks. dist.
mkd. $\frac{1}{4}$ S23 BT.

Chains

- A pine, 6 ins. diam., bears S. $23\frac{1}{2}^{\circ}$ W., 76 lks. dist., mkd. $\frac{1}{4}$ S24 BT
- 41.50 Same ravine, course N. 20° W.; asc. 32 ft. along W. slope.
- 50.20 Short spur, slopes W.; desc. 163 ft. over NW. slope.
- 63.20 Alder Creek, dry stream bed, 40 lks. wide, course NE.; asc. 109 ft. over SE. slope.
- 73.70 Short spur, slopes S. 60° E.; desc. 17 ft.
- 75.70 Short ravine, course SE.; asc. 60 ft. over S. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam. 28 ins. in the ground, for cor. of secs. 13 and 24 of T. 12 N., R. 13 E. and of secs. 14 and 23 of Frac. T. 12 N., R. $13\frac{1}{2}$ E., with brass cap mkd.




from which

- A pine, 8 ins. diam., bears N. $1\frac{1}{2}^{\circ}$ E., 28 lks. dist. mkd. T12N R13 $\frac{1}{2}$ E S14 BT
- A pine, 30 ins. diam., bears S. $51\frac{1}{2}^{\circ}$ E., 84 lks. dist. mkd. T12N R13 $\frac{1}{2}$ E S23 BT
- A pine, 24 ins. diam., bears S. $64\frac{3}{4}^{\circ}$ W., 132 lks. dist., mkd. T12N R13E S24 BT
- A pine, 7 ins. diam., bears N. $20\frac{1}{2}^{\circ}$ W., 36 lks. dist., mkd. T12N R13E S13 BT
- Land: rolling.
- Soil: limestone, adobe, 3rd rate.
- Timber: pine, fir, aspen, oak.
- Undergrowth: 2nd growth pine and fir, locust, fern.

North, bet. secs. 13 and 14

Asc. 12 ft. over gentle S. slope; thru medium pine, fir, and oak timber and patches of undergrowth.

- 5.00 Spur, slopes SE.; desc. 48 ft. over NE. slope.
- 5.53 Line tree, a yellow pine, 26 ins. diam.,
- 11.00 Drain, course S. 55° E.; asc. 38 ft. over S. slope
- 18.30 Spur, slopes SE.; desc. 34 ft.
- 28.50 Head of ravine, course NW., bears 50 lks. W.; asc. 18 ft. along W. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



from which

SURVEY EAST BOUNDARY OF T. 12 N., R. 13 E.

BOOK 17
4076

Chains

A pine, 7 ins. diam., bears N. $67\frac{1}{4}^{\circ}$ E., 38 lks. dist.,
mkd. $\frac{1}{4}$ S14 BT

A pine, 6 ins. diam., bears N. 45° W., 17 lks. dist.,
mkd. $\frac{1}{4}$ S13 BT


Over W. slope.

55.50 Change to N. slope; desc. 129 ft.

65.20 Ravine, course E.; asc. 86 ft. over SE. slope.

72.30 Short spur, slopes E.; desc. 19 ft. along E. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 32 ins. in the
ground, for cor. of secs. 12 and 13 of T. 12 N., R. 13 E.
and of secs. 11 and 14 of Frac. T. 12 N., R. $13\frac{1}{2}$ E., with
brass cap mkd.



from which

A pine, 5 ins. diam., bears N. $73\frac{1}{2}^{\circ}$ E., 76 lks. dist.,
mkd. T12N R13 $\frac{1}{2}$ E S11 BT.

A pine, 6 ins. diam., bears S. $41\frac{3}{4}^{\circ}$ E., 91 lks. dist.,
mkd. T12N R13 $\frac{1}{2}$ E S14 BT

A pine, 30 ins. diam., bears S. $69\frac{1}{4}^{\circ}$ W., 58 lks. dist.
mkd. T12N R13E S13 BT

A pine, 10 ins. diam., bears N. $27\frac{1}{4}^{\circ}$ W., 6 lks. dist.,
mkd. T12N R13E S12 BT

Land: rolling.

Soil: adobe, rocky, 3rd rate.

Timber: pine, fir, oak, aspen, alder.

Undergrowth: 2nd growth pine and fir, locust, fern.

North, bet. secs. 12 and 11.

Desc. slightly over S. slope; thru medium pine, fir, oak
and alder and patches of undergrowth.


Along E. slope; thru medium pine, oak and fir timber and
patches of undergrowth.

3.20 Short drain, course E.; asc. 49 ft. over S. slope.

15.00 Low ridge, bears E. and W.; over gentle W. slope.

30.00 Change to gentle NW. slope; desc. 60 ft.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



from which

A pine, 7 ins. diam., bears N. 23° E., 57 lks. dist., mkd.
 $\frac{1}{4}$ S11 BT.

Chains


A pine, 16 ins. diam., bears S. 59 1/4° W., 36 lks. dist. mkd. 1/4 S12 BT

Desc. 32 ft. over NW slope.

46.60 Drain, course N. 25° E.; asc. 58 ft. along E. slope.

73.10 Spur, slopes NE.; desc. 9 ft.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 1 and 12 of T. 12 N., R. 13 E. and of secs. 2 and 11 of Frac. T. 12 N., R. 13 1/2 E., with brass cap mkd.



from which

A pine, 9 ins. diam. bears N. 70 1/4° E., 9 lks. dist., mkd. T12N R13 1/2 E S2 BT

A pine, 7 ins. diam. bears S. 34 3/4° E., 26 lks. dist. mkd. T12N R13 1/2 E S11 BT

A pine, 8 ins. diam. bears S. 60 1/4° W., 8 lks. dist., mkd. T12N R13 E S12 BT

A pine, 10 ins. diam., bears N. 50 1/4° W., 24 lks. dist. mkd. T12N R13 E S1 BT

Land: rolling.

Soil: limestone, adobe, 3rd rate.

Timber: pine, oak, fir, aspen.

Undergrowth: 2nd growth pine and fir, locust.

North, bet. secs. 1 and 2

Desc. 46 ft. over N. slope; thru medium pine, fir and oak timber and patches of undergrowth.

6.90 Ravine, course NE.; asc. 12 ft.


10.00 Short spur, slopes E.; desc. 18 ft.

13.10 Short ravine, course E.; asc. 30 ft.

19.10 Road, bears E. and W.

23.20 Low rise, bears E and W.; desc. 34 ft. over gentle N. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



from which

A pine, 5 ins. diam., bears N. 47° E., 19 lks. dist., mkd. 1/4 S2 BT

Chains

A pine, 5 ins. diam., bears S. 22°W., 54 lks. dist. mkd. $\frac{1}{4}$ S1 BT


Desc. 91 ft. over NE. slope

54.00 Telephone line, bears S. 60°E. and N. 70°W.


54.10 Ravine, course N. 30°W.; asc. 78 ft. over SW. slope

71.60 Ridge, bears N. 10°W. and S. 10°E.; desc. 253 ft. over NE. slope.

80.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, and in a mound of stone to top, for cor. of lots 1 and 8 of sec. 1 and of lots 2 and 3 of sec. 2, with brass cap mkd.



91.15 (1.68 chs. S. of true point) Set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in the ground, for witness cor. to closing cor. of sec. 1, T. 12 N., R. 13 E., and of sec. 2 of Frac. T. 12 N., R. 13 $\frac{1}{2}$ E., with brass cap mkd.



from which

A Douglas fir, 8 ins. diam., bears S. 44 $\frac{1}{2}$ °E., 37 lks. dist., mkd. T12N R13 $\frac{1}{2}$ E S2 WC CC BT.

A Douglas fir, 12 ins. diam., bears S. 67 $\frac{1}{4}$ °W., 52 lks. dist. mkd. T12N R13E S1 WC CC BT

92.50 W. Chevelon Creek, 10 lks. wide, 4 ins. deep, in channel, 80 lks. wide, course S. 60° E.

92.83 Intersect the Third Standard Parallel North.

Point of intersection falls in channel of creek where it is impracticable to monument closing cor. of Ts. 12 N., Rs. 13 and 13 $\frac{1}{2}$ E.

From point of intersection the standard cor. of secs. 35 and 36, bears S. 89°43'W., 19.21 chs. dist.; the standard $\frac{1}{4}$ sec. cor. on S. bdy. of sec. 36, T. 13 N., R. 13 E., bears N. 89°43'E., 21.14 chs. dist.; both hereinbefore described.

Land: rolling.

Soil: adobe, rocky, 3rd rate.

Timber: pine, fir, oak, aspen.

Undergrowth: 2nd growth pine and fir, locust.

Chains

Beginning at the cor. of Tps. 11 and 12 N., Rs. 12 and 13 E., re-established under this Group as described in Book "A".


North, bet. secs. 31 and 36.

Desc. 22 ft. along W. slope; thru medium pine, fir, and spruce timber and dense undergrowth.

10.00 Change to SW. slope; asc. 57 ft.

19.10 Spur, slopes W.; desc. 57 ft. over NW. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



from which

An oak, 4 ins. diam., bears S. 18° E., 32 lks. dist., mkd. $\frac{1}{4}$ S31 BT.


A pine, 4 ins. diam., bears N. $23\frac{1}{4}^{\circ}$ W., 15 lks. dist., mkd. $\frac{1}{4}$ S30 BT

Over gentle W. slope.

48.10 Line tree, a yellow pine, 18 ins. diam.

59.00 Spur, slopes NW.; desc. 111 ft. over NE. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 25, 30, 31 and 36, with brass cap mkd.



from which

A yellow pine, 5 ins. diam., bears N. $20\frac{1}{4}^{\circ}$ E., 64 lks. dist., mkd. TL2N R13E S30 BT.

A yellow pine, 24 ins. diam., bears S. $10\frac{1}{2}^{\circ}$ E., 86 lks. dist., mkd. TL2N R13E S31 BT.

A maple oak, 4 ins. diam., bears S. $74\frac{1}{2}^{\circ}$ W., 54 lks. dist., mkd. TL2N R12E S30 BT.

A yellow pine, 10 ins. diam., bears N. $77\frac{1}{2}^{\circ}$ W., 45 lks. dist., mkd. TL2N R12E S25 BT.

Land: rolling.

Soil: gravel adobe, leaf mold, 2nd rate.

Timber: fir, pine, spruce, aspen, oak.

Undergrowth: 2nd growth pine and fir, vine maple, locust.

North, bet. secs. 25 and 30.

Desc. 13 ft. over NE. slope; thru medium pine, fir, oak and spruce timber and medium undergrowth.

SURVEY WEST BOUNDARY OF T.12 N., R.13 E.

BOOK 4076

Chains

- 3.50 Change to N. slope; desc. 52 ft.
- 6.60 Ravine, course E.; asc. 37 ft. over SE. slope.
- 10.60 Change to NE. slope; desc. 179 ft.
- 29.10 Ravine, course NW.; asc. 180 ft. over SW. slope.
- 38.60 Top of ascent; over W. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
 S25 S30
 1934

from which

A pine, 14 ins. diam., bears N.39 $\frac{1}{4}$ °E., 7 lks. dist., mkd. $\frac{1}{4}$ S30 BT.

A pine, 7 ins. diam., bears N.44°W., 15 lks. dist., mkd. $\frac{1}{4}$ S25 BT.

Asc. 26 ft. along W. slope.

- 48.50 Spur, slopes N.60°W.; over rolling W. slope.
- 61.00 Change to N. slope; desc. 58 ft.
- 68.50 Draw, course W.; asc. 65 ft. over SW. slope.
- 77.00 Spur, slopes W.; desc. 24 ft. over N. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of sees. 19, 24, 25 and 30, with brass cap mkd.

T12N
 R12E R13E
 S24 S19
 S25 S30
 1934

from which

A Douglas fir, 6 ins. diam., bears N.35 $\frac{1}{4}$ °E., 36 lks. dist., mkd. T12N R13E S19 BT.

A Douglas fir, 6 ins. diam., bears S.37 $\frac{1}{2}$ °E., 38 lks. dist., mkd. T12N R13E S30 BT.

A Douglas fir, 6 ins. diam., bears S.60 $\frac{1}{4}$ °W., 32 lks. dist., mkd. T12N R12E S25 BT.

A water maple, 6 ins. diam., bears N.56°W., 47 lks. dist., mkd. T12N R12E S24 BT.

Land: rolling.
 Soil: adobe, leaf mold, 2nd rate.
 Timber: fir, pine, spruce, oak, aspen.
 Undergrowth: 2nd growth pine and fir, vinemaple, locust.

SURVEY WEST BOUNDARY OF T.12 N., R.13 E.

Chains

North, bet. secs. 19 and 24.


Desc. 253 ft. over general NW. slope; through medium pine, fir and oak timber and medium undergrowth.

18.20 Beaver Creek, water, 6 lks. wide, 2 ins. deep, in bed, 30 lks. wide, course NE.; asc. 211 ft. over SE. slope.

32.00 Spur, slopes NE.; desc. 78 ft. over N. slope.

36.90 Ravine, course NE.; asc. 39 ft. over S. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



from which

A pine, 32 ins. diam., bears N.61 $\frac{1}{2}$ °E., 41 lks. dist., mkd. $\frac{1}{4}$ S19 BT.

A pine, 4 ins. diam., bears S.64 $\frac{1}{2}$ °W., 29 lks. dist., mkd. $\frac{1}{4}$ S24 BT.

Asc. 14 ft. over S. slope.


43.20 Long spur, slopes NE.; desc. 100 ft. over NW. slope.

53.10 Ravine, course NE.; asc. 69 ft. over SE. slope.

66.50 Spur, slopes NE.; desc. 67 ft. over NW. slope.

76.00 Ravine, course NE.; asc. 27 ft. over SE. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 13, 18, 19 and 24, with brass cap mkd.



from which

A white oak, 8 ins. diam., bears N.67 $\frac{1}{2}$ °E., 41 lks. dist., mkd. T12N R13E S18 BT:

A Yellow pine, 4 ins. diam., bears S.68 $\frac{1}{4}$ °E., 53 lks. dist., mkd. T12N R13E S19 BT:

A yellow pine, 18 ins. diam., bears S.31 $\frac{1}{4}$ °W., 66 lks. dist., mkd. T12N R12E S24 BT:

A yellow pine, 18 ins. diam., bears N.50°W., 87 lks. dist., mkd. T12N R12E S13 BT:

Land: rolling.

Soil: adobe, leaf mold, 2nd and 3rd rates.

Timber: pine; oak; fir, spruce, aspen.

Undergrowth: 2nd growth pine and fir, vine maple, locust.

SURVEY WEST BOUNDARY OF T.12 N., R.13 E.

BOOK 4076

Chain

North, bet. secs. 13 and 18.

Asc. 29 ft. over SE. slope; through medium pine, fir and oak timber and patches of undergrowth.

10.90 Spur, slopes NE.; desc. 81 ft. over NW. slope.

19.20 Ravine, course NE.; asc. 28 ft. over SE. slope.

23.20 Short spur, slopes NE.; desc. 31 ft. over N. slope.

25.60 Drain, course N.60°E.; asc. 56 ft. over SE. slope.

34.00 Over flat ridge, bears N.20°E. and S.20°W.

39.85 Road, bears NE. and SW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for sec. cor., with brass cap mkd.

S13	S18
1934	

from which

A pine, 6 ins. diam., bears S.47°E., 68 lks. dist., mkd.
S18 BT.A pine, 7 ins. diam., bears N.83½°W., 67 lks. dist., mkd.
S13 BT.

43.00 Leave top of ridge, desc. 14 ft. along W. slope.

49.50 Change to N. slope; desc. 63 ft.

54.50 Drain, course W.; asc. 63 ft. over SW. slope.

68.00 Short spur, slopes NW.; desc. 95 ft. over NE. slope.

77.00 Ravine, course NW.; asc. 6 ft. along W. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, with brass cap mkd.

T12N	
R12E	R13E
S12	S 7
S13	S18
1934	

from which

A pine, 8 ins. diam., bears N.69½°E., 14 lks. dist., mkd.
T12N R13E S7 BT.A pine, 8 ins. diam., bears S.50½°E., 27 lks. dist., mkd.
T12N R13E S18 BT.A pine, 8 ins. diam., bears S.27¼°W., 51 lks. dist., mkd.
T12N R12E S13 BT.A pine, 8 ins. diam., bears N.20¼°W., 38 lks. dist., mkd.
T12N R12E S12 BT.

Land: rolling.

Soil: gravel adobe, leaf mold, 2nd rate.

Timber: pine, oak, fir, aspen.

Undergrowth: 2nd growth pine and fir, locust, fern.

SURVEY WEST BOUNDARY OF T. 12 N., R. 13 E.

Chains

North, bet. secs. 7 and 12.

Desc. 94 ft. over NW. slope; through medium pine, fir and oak timber and patches of undergrowth.

9.80 Canyon, wash, 10 lks. wide, 2 ft. deep, course N.10°E.; asc. 22 ft. along E. slope.

14.90 Change to NE. slope; desc. 34 ft.

17.80 Change to SE. slope; asc. 30 ft.


21.60 Short spur, slopes E.; desc. 62 ft. over NE. slope.

25.40 Short ravine, course E.; asc. 70 ft. over SE. slope.

29.80 Short spur, slopes E.; desc. 153 ft. over NE. slope.

38.10 Canyon, small stream of water, course E.; asc. 7 ft.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



from which

A yellow pine, 6 ins. diam., bears N.55°E., 18 lks. dist., mkd. $\frac{1}{4}$ S7 BT.

A yellow pine, 5 ins. diam., bears S.57 $\frac{1}{2}$ °W., 19 lks. dist., mkd. $\frac{1}{4}$ S12 BT.

Asc. 187 ft. over S. slope.

49.60 Flat spur, slopes SE.; desc. 70 ft. over rolling N. slope.

76.70 Change to E. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 1, 6, 7 and 12, with brass cap mkd.



from which

A pine, 6 ins. diam., bears N.71°E., 23 lks. dist., mkd. T12N R13E S6 BT.

A pine, 8 ins. diam., bears S.41 $\frac{1}{2}$ °E., 65 lks. dist., mkd. T12N R13E S7 BT.

A pine, 7 ins. diam., bears S.55°W., 25 lks. dist., mkd. T12N R12E S12 BT.

A pine, 7 ins. diam., bears N.45 $\frac{1}{2}$ °W., 24 lks. dist., mkd. T12N R12E S1 BT.

Land: rolling and broken.

Soil: gravel adobe, 2nd rate.

Timber: pine, fir, oak, aspen.

Undergrowth: 2nd growth pine and fir, scrub oak, locust.

SURVEY WEST BOUNDARY OF T.12 N., R.13 E.

BOOK 4076

Chains

North, bet. secs. 1 and 6.

Asc. 6 ft. along E. slope; through medium pine, fir and oak timber and patches of undergrowth.

- 4.10 Trail, bears NE. and SW.
- 10.00 Low rise, bears NE. and SW.; desc. 125 ft. over NW. slope.
- 19.90 Drain, course W.; asc. 33 ft. over S. slope.
- 22.50 Short spur, slopes SW.; desc. 17 ft.
- 25.60 Short drain, course S.25°W.; asc. 77 ft. over SE. slope.
- 35.40 Spur, slopes SW.; desc. 10 ft.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.

sl | S6
1934

from which

A pine, 6 ins. diam., bears S.47°E., 16 lks. dist., mkd. 1/2 S6 BT.

A pine, 6 ins. diam., bears N.58 1/4°W., 22 lks. dist., mkd. 1/2 S1 BT.

Desc. 21 ft. along W. slope.

- 47.90 Change to NW. slope; desc. 280 ft.
- 63.80 Gentry Creek, 12 lks. wide, 4 ins. deep, in channel, 40 lks. wide, course NE.; asc. 267 ft. over SE. slope.
- 80.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, and in a mound of stone to top, for cor. of lots 1 and 8 of sec. 1 and of lots 4 and 5 of sec. 6, with brass cap mkd.

sl 1/8 | 4/5 S6
1934

- 86.00 Over top of flat spur, slopes E.
- 88.15 Intersect the Third Standard Parallel, North. At intersection

Set an iron post, 3 ft. long, 3 ins. diam., 28 ins. in the ground, for closing cor. of Tps. 12 N., Rs. 12 and 13 E. with brass cap mkd.

T13NR12E
S 36
sl | S6
C C
R12E R13E
T12N
1934

from which

A pine, 7 ins. diam., bears S.28 1/4°E., 42 lks. dist., mkd. T12N R13E S6 CC BT.

SURVEY WEST BOUNDARY OF T.12 N., R.13 E.

Chains

A pine, 8 ins. diam., bears S.35 $\frac{1}{2}$ °W., 43 lks. dist.,
 mkd. T12N R12E S1 CC BT.

From point of intersection the standard cor. of secs.
 35 and 36, T.13 N., R.12 E., bears S.89°19'W., 29.58
 chs. dist.; the standard $\frac{1}{4}$ sec. cor. of sec. 36 bears
 N.89°19'E., 10.83 chs. dist.; both hereinbefore de-
 scribed.

Land: rolling and mountainous.
 Soil: adobe, rocky, 3rd rate.
 Timber: pine, fir, oak, aspen.
 Undergrowth: 2nd growth pine and fir, scrub oak, locust.

SURVEY

SUBDIVISIONS OF T.12 N., R.13 E.


Beginning at the cor. of secs. 1,2,35 and 36, on the S.
 bdy. of the Tp., established under this group, described
 in Book "A",

N.0°01'W., bet. secs. 35 and 36.

Over flat; through medium pine and fir timber and medium
 undergrowth.

4.40 Road, bears S.25°E. and N.25°W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the
 ground, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor.,
 with brass cap mkd.

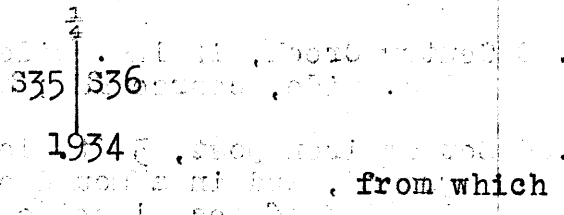

A pine, 7 ins. diam., bears S.58 $\frac{1}{2}$ °E., 10 lks. dist.,
 mkd. $\frac{1}{4}$ S36 BT.


A pine, 12 ins. diam., bears S.63 $\frac{1}{2}$ °W., 12 lks. dist.,
 mkd. $\frac{1}{4}$ S35 BT.

Over gentle N. slope.

69.60 Drain, course E.; asc. slightly.

78.40 Road, bears N.20°E. and SW.; desc. slightly.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the
 ground, and in a mound of stone to top, for cor. of secs.
 25,26,35 and 36, with brass cap mkd.



from which

A yellow pine, 14 ins. diam., bears N.59°E., 70 lks.
 dist., mkd. T12N R13E S25 BT.

SUBDIVISIONS OF T. 12 N., R. 13 E.

Chains

An oak, 8 ins. diam., bears S.14°E., 51 lks. dist.,
mkd. T12N R13E S36 BT.

An oak, 12 ins. diam., bears S.65½°W., 107 lks. dist.,
mkd. T12N R13E S35 BT.

A pine, 12 ins. diam., bears N.40¾°W., 96 lks. dist.,
mkd. T12N R13E S26 BT.

Land, level and gently rolling.
Soil, adobe, leaf mold, 2nd rate.
Timber, pine, fir, oak and aspen.
Undergrowth, 2nd growth pine, fir and locust.

S.89°53'E., on random line bet. secs. 25 and 36.

40.00 Set temp. ¼ sec. cor.

80.00 Intersect E. bdy. of Tp., 10 lks. S. of the cor. of secs.
25, 36, 26 and 35, hereinbefore described.

Thence

N.89°57'W., on true line bet. secs. 25 and 36.

Asc. 15 ft. over gentle E. slope, through medium pine, fir
and oak timber and patches of undergrowth.

21.00 Low ridge, bears NE. and SW.; desc. 38 ft. over W. slope.

27.00 Drain, course N.55°E.; asc. 39 ft. along S. slope.

31.60 Short spur, slopes NE.; desc. 23 ft.

38.40 Wash, 10 lks. wide, course N.75°E.; asc. 10 ft.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the
ground, in a mound of stone, for ¼ sec. cor., with
brass cap mkd.

¼ $\frac{S\ 25}{S\ 36}$

1934

from which

A pine, 8 ins. diam., bears S.45°E., 14 lks. dist.,
mkd. ¼ S25 BT.

A pine, 6 ins. diam., bears N.29¾°E., 28 lks. dist.,
mkd. ¼ S36 BT.

44.00 Same wash, course S.80°E.; asc. 10 ft.

51.80 same wash, course N.75°E.; asc. 18 ft.

70.00 Low rise, bears NE. and SW.; over gentle N. slope.

76.00 Center of circular corral, 1 ch. diam., on line.

79.10 Road, bears N.10°E. and S.20°W.

80.00 The cor. of secs. 25, 26, 35 and 36.

SUBDIVISIONS OF T. 12 N., R. 13 E.

Chains

Land, gently rolling.
Soil, adobe, leaf mold, 2nd and 3rd rates.
Timber, pine, fir, oak and aspen.
Undergrowth, 2nd growth pine, fir, locust and fern.

N.0°01'W., bet. secs. 25 and 26.

Over rolling land, through moderate pine, fir and oak timber, and patches of undergrowth.

Over N. slope.

5.00 Change to SE. slope.; asc. 12 ft.

13.45 Wire fence (4 strand), bears E. and W.

17.00 Low rise, bears E. and W.; desc. 9 ft. over N. slope.

21.65 Wire fence, bears S.75°W. and E.

28.30 Change to W. slope.; desc. 46 ft.

40.00 A pine, 26 ins. diam., occupies the point for $\frac{1}{4}$ sec. cor. of secs. 25 and 26; mark the tree $\frac{1}{4}$ S25 on E. face, and $\frac{1}{4}$ S26 on W. face, and from center of tree,

A pine, 6 ins. diam., bears N.36°E., 37 lks. dist., mkd. $\frac{1}{4}$ S25 BT.

A pine, 7 ins. diam., bears S.61°W., 24 lks. dist., mkd. $\frac{1}{4}$ S26 BT.

Continue desc. 65 ft. over W. slope.

44.40 Ravine, course N.15°E.; asc. 50 ft. along E. slope.

55.03 Spur, slopes N.25°E.; desc. 124 ft. over NW. slope.

67.80 Drain in swale, course N.20°E.; asc. 103 ft. over SE. slope.

80.00 Set an iron post, 3 ft long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 23, 24, 25 and 26, with brass cap mkd.

T12N	R13E
S23	S24
S26	S25

1934

from which

A pine, 15 ins. diam., bears N.68 $\frac{1}{2}$ °E., 53 lks. dist., mkd. T12N R13E S24 BT.

A pine, 17 ins. diam., bears S.32°E., 10 lks. dist., mkd. T12N R13E S25 BT.

A pine, 4 ins. diam., bears S.56 $\frac{1}{2}$ °W., 12 lks. dist., mkd. BT only.

A pine, 8 ins. diam., bears N.45 $\frac{1}{2}$ °W., 68 lks. dist., mkd. T12N R13E S23 BT.

Land, rolling.
Soil, gravel adobe, 2nd rate.
Timber, pine, fir, oak and aspen.
Undergrowth, 2nd growth pine and fir, locust and fern.

SUBDIVISIONS OF T. 12 N., R. 13 E.

BOOK 4076

- Chains S.89°57'E., on random line, bet. secs. 24 and 25.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.00 Intersect E. bdy. of the Tp., 2 lks. N. of cor. of secs. 24, 25, 23 and 26, hereinbefore described.
- Thence,
- N.89°56'W., on true line, bet. secs. 24 and 25.
- Desc. 24 ft. along N. slope; through medium pine, fir and oak timber and patches of undergrowth.
- 4.08 Head of ravine, course NW.; bears about 175 lks. N.; asc. 15 ft. over NE. slope.
- 8.50 Short spur, slopes N.; desc. 98 ft. over N. slope.
- 16.85 Drain, course N.
- 18.40 Short drain, course N.25°E.; asc. 123 ft. over E. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ $\frac{S\ 24}{S\ 25}$

1934

from which

A pine, 4 ins. diam., bears S.4°E., 21 lks. dist., mkd. $\frac{1}{4}$ S25 BT.

A pine, 5 ins. diam., bears N.60 $\frac{1}{2}$ °W., 36 lks. dist., mkd. $\frac{1}{4}$ S24 BT.

Desc. 150 ft. over NW. slope.

- 56.29 Short ravine, course N.30°W.; asc. 88 ft. over NE. slope.
- 62.28 Short spur, slopes N.; desc. 76 ft. over NW. slope.
- 66.88 Drain, course NE.; asc. 134 ft. over SE. slope.
- 80.00 The cor. of secs. 23, 24, 25 and 26.

Land, rolling.
 Soil, gravel adobe, 2nd rate.
 Timber, pine, fir and oak.
 Undergrowth, 2nd growth pine and fir, locust.

N.0°01'W., bet. secs. 23 and 24.

Asc. 41 ft. over rolling SE. slope, through moderate pine, fir and oak timber and dense undergrowth.

- 17.18 Low ridge, bears N.30°E., and S.30°W.; thence along gently rolling W. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
 S23 | S24

1934

SUBDIVISIONS OF T. 12 N., R. 13 E.

Chains	<p style="text-align: right;">from which</p> <p>A pine, 5 ins. diam., bears S.81°E., 6 lks. dist., mkd. $\frac{1}{4}$ S24 BT.</p> <p>A pine, 6 ins. diam., bears S.79°W., 16 lks. dist., mkd. $\frac{1}{2}$ S23 BT.</p> <p>43.96 Line tree, yellow pine, 15 ins. diam.,</p> <p>49.93 Road, bears NE. and SW.</p> <p>50.08 Line tree, yellow pine, 16 ins. diam.; desc. 48 ft. over SW. slope.</p> <p>58.60 Drain, course W.; asc. 38 ft. over SW. slope.</p> <p>63.26 Across level land.</p> <p>70.00 Desc. 34 ft. over gentle N. slope.</p> <p>80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 13, 14, 23 and 24, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T12N</td><td>R13E</td></tr> <tr><td>S14</td><td>S13</td></tr> <tr><td>S23</td><td>S24</td></tr> </table> <p>1934</p> </div> <p style="text-align: right;">from which</p> <p>An oak, 8 ins. diam., bears N.53½°E., 70 lks. dist., mkd. T12 N., R13E S13 BT.</p> <p>A pine, 18 ins. diam., bears S.23°37'E., 61 lks. dist., mkd. T12N R13E S24 BT.</p> <p>A pine, 12 ins. diam., bears S.13½°W., 76 lks. dist., mkd. T12N R13E S23 BT.</p> <p>A pine, 4 ins. diam., bears N.33¾°W., 40 lks. dist., mkd. T12N R13E S14 BT.</p> <p>Land, gently rolling. Soil, gravel adobe, leaf mold, 2nd rate. Timber, pine, fir, oak and aspen. Undergrowth, 2nd growth pine and fir, locust and fern.</p> <hr/> <p>S.89°56'E., on random line, bet. secs. 13 and 24.</p> <p>40.00 Set temp. $\frac{1}{2}$ sec. cor.</p> <p>80.00 Intersect E. bdy. of the Tp., 2 lks. S. of cor. of secs. 13, 24, 14 and 23, hereinbefore described.</p> <p>Thence</p> <p>N.89°57'W., on true line bet. secs. 13 and 24.</p> <p>Along rolling S. slope, through moderate pine, fir, and oak timber and patches of undergrowth.</p> <p>5.00 Head of ravine, course SE.; bears 50 lks. S.; asc. 36 ft. over E. slope.</p> <p>33.39 Low rise, bears N. and S.; desc. 20 ft. over W. slope.</p> <p>38.21 Ravine, course SW.; asc. 5 ft. over SE. slope.</p>	T12N	R13E	S14	S13	S23	S24
T12N	R13E						
S14	S13						
S23	S24						

SUBDIVISIONS OF T. 12 N., R. 13 E.

Chains

40.00

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 13

 $\frac{1}{4}$

S 24

1934

from which

A pine, 15 ins. diam., bears S. $26\frac{3}{4}^{\circ}$ E., 64 lks. dist., mkd. $\frac{1}{4}$ S24 BT.

A pine, 7 ins. diam., bears N. $51\frac{1}{2}^{\circ}$ W., 29 lks. dist., mkd. $\frac{1}{4}$ S13 BT.

Continue asc. 21 ft. over SE. slope.

54.60 Across level land.

60.37 Center of lake, 150 lks. diam., bears 250 lks. N.

62.20 Road, bears N. and S.

67.00 Desc. 33 ft. over W. slope.

68.89 Ravine, (near head), course N. 10° W.; asc. 41 ft. over NE. slope.

76.55 Change to N. slope.

80.00 The cor. of secs. 13, 14, 23 and 24.

Land, rolling.

Soil, adobe, leaf mold, 2nd rate.

Timber, pine, fir and oak.

Undergrowth, 2nd growth pine and fir; locust and fern.

N. $0^{\circ}01'$ W., bet. secs. 13 and 14.

Desc. 92 ft. over gently rolling N. slope, through moderate pine, fir and oak timber and patches of undergrowth.

20.63 Drain, course N. 25° W.; asc. 24 ft. along W. slope.

22.80 Short spur, slopes W.; desc. 24 ft. over NW. slope.

27.09 Short ravine, course SW.; asc. 59 ft. over SE. slope.

32.30 Rise, bears N. 20° E. and S. 20° W.; along W. slope.40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd. $\frac{1}{4}$

S14 | S13

1934

from which

A pine, 8 ins. diam., bears N. 38° E., 44 lks. dist., mkd. $\frac{1}{4}$ S 13 BT.

A pine, 8 ins. diam., bears N. $19\frac{1}{4}^{\circ}$ W., 47 lks. dist., mkd. $\frac{1}{4}$ S14 BT.

Continue along W. slope.

SUBDIVISIONS OF T. 12 N., R. 13 E.

Chains

54.10

Desc. 12 ft. over N. slope.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 11, 12, 13 and 14, with brass cap mkd.

T12N	R13E
S11	S12
S14	S13

1934

from which

A pine, 14 ins. diam., bears N. 43 1/4° E., 31 lks. dist., mkd. T12N R13E S12 BT.

A pine, 22 ins. diam., bears S. 30 1/2° E., 78 lks. dist., mkd. T12N R13E S13 BT.

A pine, 5 ins. diam., bears S. 32° W., 51 lks. dist., mkd. T12N R13E S14 BT.

A pine, 8 ins. diam., bears N. 61 1/2° W., 63 lks. dist., mkd. T12N R13E S11 BT.

Land, level and rolling.

Soil, adobe, leaf mold, 2nd rate.

Timber, pine, fir and oak.

Undergrowth, 2nd growth pine and fir, locust, scrub oak.

S. 89° 57' E., on random line, bet. secs. 12 and 13.

40.00

Set temp. 1/4 sec. cor.

79.90

Intersect E. bdy. of the Tp., 5 lks. S. of the cor. of secs. 12, 13, 11 and 14, hereinbefore described.

Thence

N. 89° 59' W., on true line bet. secs. 12 and 13.

Asc. 78 ft. over rolling E. slope, through medium pine, fir and oak timber and patches of undergrowth.

10.80

Rise, bears N. and S.; desc. 15 ft. along S. slope.

25.07

Drain, course S. 30° W., 3 chs.; thence S.; asc. 17 ft. over E. slope.

35.80

Low rise, bears NE. and SW.; over W. slope.

39.95

Set an iron post, 3 ft. long, 1 in. diam., 36 ins. in the ground, in road bed; bears NE. and SW., for 1/4 sec. cor., with brass cap mkd.

1/4	S 12
	S 13

1934

from which

A pine, 6 ins. diam., bears S. 7 1/2° E., 43 lks. dist., mkd. 1/4 S13 BT.

A pine, 8 ins. diam., bears N. 1 3/4° W., 40 lks. dist., mkd. 1/4 S12 BT.

Desc. 7 ft. over W. slope.

SUBDIVISIONS of T. 12 N., R. 13 E.

BOOK 4076

Chains

- 40.00 Road, bears NE. and SW.
 46.21 Drain, course N.; asc. 25 ft. over E. slope.
 53.69 Rise, bears N. and S. 20° W.; desc. 61 ft. over W. slope.
 55.20 Road, bears NW. and SE.
 65.95 Ravine, course NW.; asc. 64 ft. over NE. slope.
 79.90 The cor. of secs. 11, 12, 13 and 14.

Land, rolling.

Soil, adobe, leaf mold, 2nd rate.

Timber, pine, fir, oak and aspen.

Undergrowth, 2nd growth pine and fir, locust, fern.

N. 0° 01' W., bet. secs. 11 and 12.


Desc. 115 ft. over rolling N. slope, through moderate pine and fir timber and scattering undergrowth.

- 13.98 Drain, 10 lks. wide, course N. 60° W.; asc. 86 ft. over SW. slope.

- 26.00 Spur, slopes N. 10° W.; desc. 58 ft. along E. slope.

- 34.30 Change to N. slope; desc. 29 ft. along spur.

- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground to bedrock, and in a mound of stone to top, for sec. cor., with brass cap mkd



1934

from which

A pine, 15 ins. diam., bears N. 77½° E., 32 lks. dist., mkd. ¼ S12 BT.

A pine, 14 ins. diam., bears N. 21° 23' W., 41 lks. dist., mkd. ¼ S11 BT.

Desc. 161 ft. along W. slope.

- 50.63 Road, bears N. 30° W. and S. 60° E.

- 56.43 Same road, bears NE. and S. 30° W.

- 58.15 W. fork of Chavelon Creek, 15 lks. wide, 4 ins. deep, in channel, 70 lks. wide, course NE.; asc. 87 ft. over SE. slope.

- 62.85 Short spur, slopes E.; desc. 24 ft. over NE. slope.

- 65.25 Short ravine, course S. 60° E.; asc. 100 ft. over S. slope.

- 67.08 Same road, bears N. 75° W. and E.

- 73.00 Change to along E. slope; asc. 34 ft.

- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 1, 2, 11 and 12, with brass cap mkd.

SUBDIVISIONS OF T. 12 N., R. 13 E.

Chains

T12N R13E

S2 | S1

S11 | S12

1934

from which

A pine, 4 ins. diam., bears N.77½°E., 6 lks. dist., mkd. T12B R13E S1 BT.

A pine, 12 ins. diam., bears S.10¾°E., 23 lks. dist., mkd. T12N R13E S12 BT.

A pine, 10 ins. diam., bears S.46¼°W., 29 lks. dist., mkd. T12N R13E S11 BT.

A pine, 11 ins. diam., bears N.59½°W., 15 lks. dist., mkd. T12N R13E S2 BT.

Land, rolling.
Soil, gravel adobe, 2nd rate.
Timber, pine, fir and oak.
Undergrowth, 2nd growth pine, locust and fern.

S.89°59'E., on random line, bet. secs. 1 and 12.

40.00 Set temp. ¼ sec. cor.

80.04 Intersect E. bdy. of the Tp., 5 lks. S. of cor. of secs. 1, 12, 2 and 11, hereinbefore described.

Thence

S.89°59'W., on true line, bet. secs. 1 and 12.

Over rolling N. slope, through moderate pine, fir and oak timber and scattering undergrowth.

3.80 Change to E. slope; asc. 21 ft.

9.90 Road, bears N. and S.

15.60 Low rise, bears N. and S.; desc. 78 ft. over W. slope.

23.86 Drain, course NW.; asc. 39 ft. over E. slope.

31.76 Short spur, slopes NE.; desc. 14 ft. over NW. slope.

33.29 Ravine, course N.55°E.; asc. 69 ft. over SE. slope.

40.02 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, to bedrock, and in a mound of stone to top; for ¼ sec. cor.; with brass cap mkd.

S 1

¼ ——— S 12

1934

from which

A pine, 12 ins. diam., bears S.50¾°W., 50 lks. dist., mkd. ¼ S12 BT.

A pine, 12 ins. diam., bears N.8½°E., 105 lks. dist., mkd. ¼ S1 BT.

Asc. 7 ft. over SE. slope.

SUBDIVISIONS OF T. 12 N., R. 13 E.

BOOK 4076

- Chains
 43.00 Spur, slopes N.15°E.; desc. 86 ft. over W. slope.
 54.36 Drain, course NW.; thence over N. slope.
 67.74 W. fork of Chevelon Creek, 20 lks. wide, 5 ins. deep, in channel 60 lks. wide, course N.60°E.; asc. 169 ft. over SE. slope.
 80.04 The cor. of secs. 1, 2, 11 and 12.
 Land, rolling.
 Soil, adobe, 2nd rate.
 Timber, pine, fir and oak.
 Undergrowth, 2nd growth pine and fir, locust, fern.
-
- N.0°01'W., bet. secs. 1 and 2.
 Over rolling land, through moderate pine and fir timber and scattering undergrowth.
 Asc. 27 ft. over SE. slope.
 10.99 Ridge, bears N. and S.; desc. 111 ft. along W. slope.
 30.55 Drain, course NE. 3 chs.; thence SE.; asc. 54 ft. over SE. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd
- $\frac{1}{4}$
 S2. | S1
 1934
- from which
- A pine, 7 ins. diam., bears S.56 $\frac{3}{4}$ °E., 22 lks. dist., mkd. $\frac{1}{4}$ S1 BT.
 A pine, 8 ins. diam., bears S.37 $\frac{1}{2}$ °W., 10 lks. dist., mkd. $\frac{1}{4}$ S2 BT.
- 42.10 Wire fence (6 strand), bears E. and W.
 43.50 Ridge, bears NE. and S.25°W.; desc. 118 ft. over NW. slope.
 60.59 Drain, course N.5°E., thence along E. slope.
 66.16 Road, bears N.30°E. and S.30°W.
 67.89 Fence, bears N.20°E. and S.20°W.
 68.51 Enter circular corral.
 70.10 Leave corral; barn bears about 80 lks. E.
 70.38 Road, bears S.75°E. and N. 75°W.
 71.65 Ranger station, bears E. about 95 lks. dist.; asc. 90 ft. over S. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of lots 1 and 8 of sec. 2 and lots 4 and 5 of sec. 1, with brass cap mkd

SUBDIVISIONS OF T. 12 N., R. 13 E.

Chains

S2	1 4	S1
	8 5	

1934

- 83.35 Fence, bears N.75°E. and S.75°W.; fence bearing S.5°W., joins this fence E. 220 lks. dist.
- 86.00 Rise, bears NW. and SE.; desc. 10 ft. over N. slope.
- 92.27 Intersect the 3rd. Standard Parallel, North. At intersection,
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for closing cor. of secs. 1 and 2, with brass cap mkd

T13N R13E

S35

S2 | S1

C | C

T12N R13E.

1934.

from which

A pine, 9 ins. diam., bears S.23 $\frac{1}{2}$ °E., 27 lks. dist., mkd. T12N R13E S1 CC BP

A pine, 8 ins. diam., bears S.50°W., 54 lks. dist., mkd. T12N R13E S2 CC BT.

From point of intersection, the standard cor. of secs. 34 and 35, T 13 N., R. 13 E., bears S.89°17'W., 19.88 chs. dist.; and standard $\frac{1}{4}$ sec. cor. of sec. 35, bears N.89°17'E., 20.41 chs. dist., both hereinbefore described.

Land, rolling.

Soil, adobe, leaf mold, 2nd rate.

Timber, pine, fir, oak and aspen.

Undergrowth, 2nd growth pine and fir, scrub oak, fern.

Beginning at the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp., established under this group as described in book "A",

N.0°01'W., bet. secs. 34 and 35:

Across level land, drains generally W.; through medium pine, fir and spruce timber and dense undergrowth.

- 17.75 Road, bears E. and W.; desc. 34 ft. over NW. slope.

- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

 $\frac{1}{4}$

S34

S35

1934

from which

SUBDIVISIONS OF T. 12 N., R. 13 E.

BOOK 4076

Chains

A spruce, 8 ins. diam., bears N. $48\frac{1}{2}^{\circ}$ E., 42 lks. dist.,
mkd. $\frac{1}{4}$ S35 BT.

A spruce, 10 ins. diam., bears S. $77\frac{1}{2}^{\circ}$ W., 30 lks. dist.,
mkd. $\frac{1}{4}$ S34 BT.

Desc. 33 ft. over NW. slope.

42.85 Drain, course NE.; asc. 68 ft. over SE. slope.

51.00 Spur, slopes NE.; desc. 31 ft. over N. slope.

55.68 Drain, course NE.; asc. 24 ft. over SE. slope.

63.07 Spur, slopes NE.; desc. 22 ft. over N. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground to bedrock, and in a mound of stone to top, for
cor. of secs. 26, 27, 34 and 35, with brass cap mkd.

T12N	R13E
S27	S26

S34	S35
-----	-----

1934

from which

A pine, 8 ins. diam., bears N. 78° E., 31 lks. dist.,
mkd. T12N R13E S26 BT.

A pine, 6 ins. diam., bears S. $59\frac{1}{2}^{\circ}$ E., 82 lks. dist.,
mkd. T12N R13E S35 BT.

A pine, 12 ins. diam., bears S. 33° W., 23 lks. dist.,
mkd. T12N R13E S34 BT.

A pine, 14 ins. diam., bears N. $45\frac{1}{2}^{\circ}$ W., 46 lks. dist.,
mkd. T12N R13E S27 BT.

Land, level and rolling.

Soil, adobe, leaf mold, 2nd rate.

Timber: pine, spruce, fir, aspen and oak.

Undergrowth: 2nd growth pine and fir, locust, fern.

S. $89^{\circ}53'$ E., on random line, bet. secs. 26 and 35.

40.00 Set temp. $\frac{1}{2}$ sec. cor.

80.06 A point 32 lks. S. of the cor. of secs. 25, 26, 35 and 36.

Thence

S. $89^{\circ}53'$ W., on true line bet. secs. 26 and 35.

Desc. 22 ft. over rolling NW. slope, through medium pine,
fir and oak timber and dense undergrowth.

15.26 Drain, course N. 25° E.; asc. 44 ft. over E. slope.

35.00 Low ridge, bears N. and S. 15° E.; desc. 15 ft. over W. slope.

40.03 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
the ground, for $\frac{1}{2}$ sec. cor., with brass cap mkd.

SUBDIVISIONS OF T. 12 N., R. 13 E.

Chains

S. 26
S35
1934

from which

A pine, 10 ins. diam., bears N. 49 $\frac{1}{2}$ ° W., 64 lks. dist.,
mkd. $\frac{1}{4}$ S26 BT.

A pine, 16 ins. diam., bears S. 21° E., 68 lks. dist.,
mkd. $\frac{1}{4}$ S35 BT.

Desc. 48 ft. over W. slope.

44.96 Short ravine, course NW.; asc. 17 ft. over NE. slope.

47.06 Short spur, slopes NW.; desc. 80 ft. over W. slope.

51.54 Drain, course N.; asc. 64 ft. over E. slope.

62.56 Low ridge, bears N. and S.; desc. 19 ft. over W. slope.

72.96 Low swale, course N.; asc. 25 ft. over E. slope.

80.06 The cor. of secs. 26, 27, 34 and 35.

Land: rolling.

Soil: adobe, leaf mold, 2nd rate.

Timber: pine, fir, oak and aspen.

Undergrowth: 2nd growth pine and fir, scrub oak, fern.

N. 0° 01' W., bet. secs. 26 and 27.

Across level land, through medium pine, fir and oak
timber and patches of undergrowth.

20.20 Road, bears NE. and S. 20° W.

21.00 Flat ridge, bears N. 10° E. and SW.; desc. 10 ft. over NW.
slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
S27 | S26

1934

from which

A pine, 6 ins. diam., bears S. 57 $\frac{1}{2}$ ° E., 19 lks. dist.,
mkd. $\frac{1}{4}$ S26 BT.

A pine, 20 ins. diam., bears S. 51° W., 56 lks. dist.,
mkd. $\frac{1}{4}$ S27 BT.

43.10 Desc. 107 ft. over NW. slope.

49.25 Bottom of canyon, 15 lks wide, course NE.; asc. 64 ft.
over SE. slope.

56.11 Small drain, course E.; continue asc. 61 ft.

62.50 Spur, slopes E.; thence across level land to corner.

SUBDIVISIONS OF T. 12 N., R. 13 E.

BOOK 4076

Chains
80.00

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 22, 23, 26 and 27, with brass cap mkd.

T12N R13E	
S22	S23
S27	S26

1934

from which

A pine, 30 ins. diam., bears N.22 $\frac{1}{2}$ °E., 87 lks. dist., mkd. T12N R13E S23 BT.

A pine, 16 ins. diam., bears S.59 $\frac{1}{2}$ °E., 70 lks. dist., mkd. T12N R13E S26 BT.

A pine, 4 ins. diam., bears S.30 $\frac{1}{2}$ °W., 26 lks. dist., mkd. T12N R13E S27 BT.

An oak, 12 ins. diam., bears N.53 $\frac{3}{4}$ °W., 25 lks. dist., mkd. T12N R13E S22 BT.

Land, level and rolling.

Soil, adobe, 2nd and 3rd rate.

Timber, pine, fir and oak.

Undergrowth, 2nd growth pine and fir, locust, fern.

N.89°53'E., on random line, bet. secs. 23 and 26.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.12 A point 5 lks. S. of the cor. of secs. 23, 24, 25 and 26.

Thence

S.89°51'W., on true line, bet. secs. 23 and 26.

Along gently rolling S. slope, through moderate pine, fir and oak timber and patches of undergrowth.

15.00 Change to W. slope,; desc. 13 ft.

32.82 Road, bears NE. and SW.; thence across level land.

40.06 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$	S 23	
	S 26	

1934

from which

A pine, 6 ins. diam., bears N.64 $\frac{1}{4}$ °E., 17 lks. dist., mkd. $\frac{1}{4}$ S23 BT.

A pine, 10 ins. diam., bears S.26 $\frac{1}{2}$ °W., 29 lks. dist., mkd. $\frac{1}{4}$ S26 BT.

Desc. 100 ft. over W. slope.

44.31 Bottom of canyon, 15 lks. wide, course irregular N.; asc. 195 ft. over SE. slope.

70.00 Top of asc.; thence across level land.

SUBDIVISIONS OF T. 12 N., R. 13 E.

Chains

80.12

The cor. of secs. 22, 23, 26 and 27.

Land, level and rolling.

Soil, gravel adobe, 2nd rate.

Timber, pine, fir, oak and spruce.

Undergrowth, 2nd growth pine and fir, locust, scrub oak.

N.0°01'W., bet. secs. 22 and 23.

Over level and rolling land, through medium pine and oak timber and patches of undergrowth.

Across level land.

10.00

Desc. 63 ft. along W. slope.

19.95

Bottom of desc.; thence across level land.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

↓
S22 S23

1934

from which

A pine, 10 ins. diam., bears S.79 $\frac{1}{2}$ °E., 47 lks. dist., mkd. $\frac{1}{4}$ S23 BT.A pine, 4 ins. diam., bears N.89°W., 24 lks. dist., mkd. $\frac{1}{4}$ S22 BT.

Desc. 81 ft. over NW. slope.

60.63

Ravine, course NE.; asc. 55 ft. over SE. slope.

73.96

Spur, slopes NE.; thence along W. slope.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 14, 15, 22 and 23, with brass cap mkd.

T12N R13E
S15 S14

S22 S23

1934

from which

A pine, 10 ins. diam., bears N.19°E., 99 lks. dist., mkd. T12N R13E S14 BT.

A pine, 16 ins. diam., bears S.85 $\frac{1}{2}$ °E., 32 lks. dist., mkd. T12N R13E S23 BT.A pine, 24 ins. diam., bears S.33 $\frac{1}{2}$ °W., 38 lks. dist., mkd. T12N R13E S22 BT.

A pine, 24 ins. diam., bears N.29°W., 56 lks. dist., mkd. T12N R13E S15 BT.

Land, level and rolling.

Soil, adobe, leaf mold, 2nd rate.

Timber, pine, fir, oak and aspen.

Undergrowth, 2nd growth pine and fir, locust, fern.


SUBDIVISIONS OF T. 12 N., R. 13 E.

Chains	N.89°51'E., on random line, bet. secs. 14 and 23.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.10	The cor. of secs. 13, 14, 23 and 24.
	Thence
	S.89°51'W., on true line, bet. secs. 14 and 23.
	Over rolling N. slope, through medium pine, fir and oak timber and dense undergrowth.
2.50	Over top of spur, slopes NW.
5.00	Leave top of spur,; desc. 74 ft. along S. slope.
34.80	Change to steep W. slope; desc. 128 ft.
40.05	Set an iron post, 3 ft. long, 1 in. diam.; 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4} \frac{S 14}{S 23}$
	1934
	from which
	A pine, 6 ins. diam., bears N.6 $\frac{1}{2}$ °E., 22 lks. dist., mkd. $\frac{1}{4}$ S14 BT.
	A pine, 8 ins. diam., bears S.41 $\frac{1}{2}$ °E., 20 lks. dist., mkd. $\frac{1}{4}$ S23 BT.
	Continue desc. 40 ft. over W. slope.
41.10	Wash, 10 lks. wide, in canyon bottom 60 lks. wide, course N.; asc. 115 ft. over E. slope.
46.53	Spur, slopes NE.; desc. 106 ft. over W. slope.
54.14	Ravine, course N.20°E.; asc. 105 ft. over E. slope.
60.60	Spur, slopes NE.; desc. 56 ft. over NW. slope.
64.97	Ravine, course NE.; asc. 142 ft. over E. slope.
75.10	Over flat spur, slopes N.
80.10	The cor. of secs. 14, 15, 22 and 23.
	Land, rolling. Soil, gravel and rocky adobe, 2nd and 3rd rates. Timber, pine, oak, fir and aspen. Undergrowth, 2nd growth pine and fir, locust, scrub oak.
	N.0°01'W., bet. secs. 14 and 15.
	Desc. 63 ft. over rolling NW. slope, through medium pine and oak timber and scattering undergrowth.
14.48	Change to W. slope; desc. 113 ft.
23.04	Head of draw, course W.; asc. 51 ft. over SW. slope.
28.14	Short spur, slopes W.; desc. 115 ft. over NW. slope.

SUBDIVISIONS OF T. 12 N., R. 13 E.

Chains
34.80 Wash, 20 lks. wide, in canyon bottom, 80 lks. wide, course E.; 5 chs., thence NE.; asc. 146 ft. over SE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bedrock, and in a mound of stone to top; for $\frac{1}{4}$ sec. cor., with brass cap mkd.



from which

A pine, 12 ins. diam., bears N.50°W., 29 lks. dist., mkd. $\frac{1}{4}$ S15 BT.

A pine, 12 ins. diam., bears N.12 $\frac{1}{2}$ °E., 60 lks. dist., mkd. $\frac{1}{4}$ S14 BT.


41.10 Spur, slopes SE.; desc. 53 ft. over NE. slope.

46.48 Drain, course E.; asc. 24 ft. over S. slope.

48.00 Long spur, slopes E.; desc. 68 ft. over NW. slope.

57.30 Gulch, 4 ft. wide, 2 ft. deep, course E.; asc. 176 ft. over SW. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 10, 11, 14 and 15, with brass cap mkd.



from which

A pine, 16 ins. diam., bears N.53 $\frac{1}{4}$ °E., 89 lks. dist., mkd. T12N R13E S11 BT.

A pine, 24 ins. diam., bears S.31 $\frac{1}{2}$ °E., 52 lks. dist., mkd. T12N R13E S14 BT.

A pine, 18 ins. diam., bears S.67 $\frac{1}{2}$ °W., 45 lks. dist., mkd. T12N R13E S15 BT.

A pine, 14 ins. diam., bears N.67 $\frac{1}{2}$ °W., 54 lks. dist., mkd. T12N R13E S10 BT.

Land, rolling.

Soil, adobe, 2nd and 3rd rates.

Timber, pine, fir and oak.

Undergrowth, 2nd growth pine and fir, scrub oak, fern.

N.89°51'E., on random line, bet. secs. 11 and 14.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.20 A point 30 lks. N. of the cor. of secs. 11, 12, 13 and 14.

Thence

N.89°56'W., on true line bet. secs. 11 and 14.

4.77 Drain, course NW.; asc. 65 ft. over NE. slope.

SUBDIVISIONS OF T. 12 N., R. 13 E.

BOOK 4076

Chains

- 12.66 Spur, slopes N.; desc. 128 ft. over SW. slope.
 27.70 Drain, course NW.; asc. 41 ft. over NE. slope.
 31.65 Short spur, slopes N.; desc. 102 ft. over NW. slope.
 40.10 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 11

 $\frac{1}{4}$
S 14

1934

from which

A pine, 16 ins. diam., bears S.37°E., 75 lks. dist.,
 mkd. $\frac{1}{4}$ S14 BT.

A pine, 4 ins. diam., bears N.55°W., 43 lks. dist.,
 mkd. $\frac{1}{4}$ S11 BT.

Desc. 34 ft. over NW. slope.

- 46.20 W. fork of Chevelon Creek, 20 lks. wide, 5 ins. deep, in canyon bottom, 100 lks. wide, course NE.; asc. 134 ft. over SE. slope.
 53.54 Change to S. slope.; desc. 24 ft.
 60.82 Draw, course SE.; asc. 186 ft. over NE. slope.
 77.20 Over rolling SW. slope.
 80.20 The cor. of secs. 10, 11, 14 and 15.

Land, rolling and mountainous.

Soil, rocky adobe, 3rd rate.

Timber, pine, fir and oak.

Undergrowth, 2nd growth pine and fir, scrub oak, locust.

N.0°01'W., bet. secs. 10 and 11.

Over gentle SE. slope, through medium pine, fir and oak timber and patches of dense undergrowth.

- 20.75 Road, bears E. and W.; change to gentle NW. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

 $\frac{1}{4}$

S10 | S11

1934

from which

A pine, 5 ins. diam., bears S.82°E., 16 lks. dist.,
 mkd. $\frac{1}{4}$ S11 BT.

A pine, 12 ins. diam., bears S.58 $\frac{1}{2}$ °W., 11 lks. dist.,
 mkd. $\frac{1}{4}$ S10 BT.

- 44.95 Telephone line, bears N.20°E. and S.20°W.
 48.80 Winslow Road, bears N.20°E. and S.20°W.


SUBDIVISIONS OF T. 12 N., R. 13 E.

Chains

Over slightly rolling W. slope.

74.85 Winslow road, bears NW. and SE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 2, 3, 10 and 11, with brass cap mkd.



1934

from which

A pine, 10 ins. diam., bears N.68°E., 124 lks. dist., mkd. T12N R13E S2 BT.

A pine, 10 ins. diam., bears S.17½°E., 60 lks. dist., mkd. T12N R13E S11 BT.

A pine, 10 ins. diam., bears S.12½°W., 40 lks. dist., mkd. T12N R13E S10 BT.

A pine, 10 ins. diam., bears N.60¾°W., 140 lks. dist., mkd. T12N R13E S3 BT.

Land, level and slightly rolling.
Soil, gravel adobe, leaf mold, 2nd rate.
Timber, pine, fir and oak.
Undergrowth, 2nd growth pine and fir, locust, fern.

S.89°56'E., on random line, bet. secs. 2 and 11.

40.00 Set temp. ¼ sec. cor.

80.38 A point 10 lks. S. of cor. of secs. 1, 2, 11 and 12.

Thence

West, on true line, bet. secs. 2 and 11.

Asc. 26 ft. over rolling E. slope, through medium pine, fir and oak timber and patches of undergrowth.

4.00 Ridge, bears N. and S.; desc. 28 ft. over SW. slope.

9.85 Road, bears NW. and SE.


17.61 Head of draw, course SE.; asc. 63 ft. over SE. slope.

33.00 Long spur, slopes NE.; desc. 11 ft. over NW. slope.

33.78 Road, bears N.10°E. and SW.

40.19 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for ¼ sec. cor., with brass cap mkd.

S 2



1934

from which

A yellow pine, 14 ins. diam., bears S.20°E., 82 lks. dist., mkd. ¼ S11 BT.

SUBDIVISIONS OF T. 12 N., R. 13 E.

BOOK 4076

Chains

A white oak, 6 ins. diam., bears N.35°W., 21 lks. dist., mkd. $\frac{1}{4}$ S2 BT.

Desc. 8 ft. over NW. slope.

40.78 Drain, course N.; asc. 26 ft. over E. slope.

50.00 Change to NW. slope,; desc. 46 ft.

53.68 Old road, bears N. and S.

53.80 Telephone line, bears N. and S.

54.38 Drain, course N.; asc. 74 ft. over E. slope.

65.00 Over gentle W. slope.

80.38 The cor. of secs. 2, 3, 10 and 11.

Land, gently rolling.

Soil, adobe, leaf mold, 2nd rate.

Timber, pine, fir and oak.

Undergrowth, 2nd growth pine and fir, locust, fern.

N.0°01'W., bet. secs. 2 and 3.

Over gentle W. slope, through medium pine timber and scattering undergrowth.

26.10 Telephone line, bears NE. and SW.

26.60 Winslow road, bears NE. and SW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ | \\ S3 \quad | \quad S2 \end{array}$$

1934

from which

A pine, 11 ins. diam., bears N.79°E., 18 lks. dist., mkd. S2 BT.

A pine, 7 ins. diam., bears N.75°W., 20 lks. dist., mkd. $\frac{1}{4}$ S3 BT.

Desc. 28 ft. over irregular N. slope.

49.50 Head of ravine, course N.10°W.; desc. 62 ft. along W. slope.

53.62 Same ravine, course NE.; asc. 59 ft. along E. slope.

59.65 Top of asc.; desc. 96 ft. along E. slope.

80.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of lots 1 and 8 of sec. 3, and of lots 4 and 5 of sec. 2, with brass cap mkd.

$$\begin{array}{c} S3 \quad \frac{1}{8} \quad | \quad \frac{4}{5} \quad S2 \end{array}$$

1934

Desc. 17 ft. along E. slope.

83.50 Drain, course N.5°W.; asc. 28 ft. along W. slope.

SUBDIVISIONS OF T. 12 N., R. 13 E.

Chains

91.50

Intersect the 3rd Standard Parallel, North. At intersection—

Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for closing cor. of secs. 2 and 3, with brass cap mkd.

T13N R13E

S34

S3 | S2

C | C

T12N R13E

1934

from which

A pine, 9 ins. diam., bears S.23 1/2° E., 27 lks. dist., mkd. T12N R13E S2 CC BT.

A pine, 8 ins. diam., bears S.50° W., 54 lks. dist., mkd. T12N R13E S2 CC BT.

From point of intersection, the standard cor. of secs. 33 and 34, T. 13 N., R. 13 E., bears S.89°20' W., 20.08 chs. dist.; and standard 1/4 sec. cor. of sec. 34, bears N.89°20' E., 20.23 chs. dist., both hereinbefore described.

Land, level and slightly rolling.

Soil, adobe, leaf mold, 2nd rate.

Timber, pine, fir and oak.

Undergrowth, 2nd growth pine and fir, locust, fern.

Beginning at the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp., established under this group as described in book "A",

N.0°02' W., bet. secs. 33 and 34.

Over gentle SW. slope, through fir, pine and aspen timber and dense undergrowth.

12.00 Change to gentle N. slope.

18.55 Drain, course N.70° E.; asc. 71 ft. over SE. slope.

22.75 Road, bears, E. and W.

33.64 Spur, bears NE.; desc. 29 ft. over NW. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.

1/4

S33

S34

1934

from which

An oak, 6 ins. diam., bears N.55° W., 20 lks. dist., mkd. 1/4 S33 BT.

A fir, 6 ins. diam., bears S.53 3/4° E., 17 lks. dist., mkd. 1/4 S34 BT.

Continue descent, 57 ft. over NW. slope.

SUBDIVISIONS OF T. 12 N., R. 13 E.

BOOK 4076

Chains

56.00 Drain, course NE.; asc. 23 ft. over SE. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 27, 28, 33 and 34, with brass cap mkd.

T12N	R13E
S28	S27
S33	S34

1934

from which

An oak, 22 ins. diam., bears N.62 $\frac{1}{2}$ °E., 23 lks. dist., mkd. T12N R13E S27 BT.

An oak, 4 ins. diam., bears S.57°E., 16 lks. dist., mkd. T12N R13E S34 BT.

A pine, 3 ins. diam., bears S.64 $\frac{1}{2}$ °W., 33 lks. dist., mkd. BT only.

A pine, 16 ins. diam., bears N.30°W., 72 lks. dist., mkd. T12N R13E S28 BT.

Land, gently rolling.

Soil, adobe, leaf mold, 2nd rate.

Timber, fir, pine, aspen and oak.

Undergrowth, 2nd growth pine and fir, locust, fern.

40.00 S.89°53'E., on random line, bet. secs. 27 and 34.

Set temp. $\frac{1}{4}$ sec. cor.

80.02 A point, 19 lks. S. of cor. of secs. 26, 27, 34 and 35.

Thence

S.89°59'W., on true line bet. secs. 27 and 34.

Over gentle E. slope, through medium fir, pine, aspen and spruce timber and scattering undergrowth.

14.10 Road, bears N. and S.

20.00 Desc. 76 ft. over W. slope.

26.64 Drain, 6 lks. wide, 3 ft. deep, course N.; asc. 85 ft. over E. slope.

38.00 Change to gentle NE. slope.

40+01 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$	S 27
	S 34

1934

from which

A pine, 14 ins. diam., bears S.35 $\frac{1}{2}$ °W., 19 lks. dist., mkd. $\frac{1}{4}$ S34 BT.A pine, 5 ins. diam., bears N.25 $\frac{1}{2}$ °E., 25 lks. dist., mkd. $\frac{1}{4}$ S27 BT.

SUBDIVISIONS OF T. 12 N., R. 13 E.

Chains

Continue over gentle NE. slope.

62.65 Head of drain, course NE.

80.02 The cor. of secs. 27, 28, 33 and 34.

Land, slightly rolling.

Soil, adobe, leaf mold, 2nd rate.


Timber, pine, fir, spruce and oak.

Undergrowth, 2nd growth pine and fir, locust, fern.

N.0°02'W., bet. secs. 27 and 28.

Desc. 34 ft. over gentle NE. slope, through medium pine, fir and oak timber, and moderate undergrowth.

10.00 Bottom of desc., over level N. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

1934

from which

A pine, 22 ins. diam., bears S.67°E., 36 lks. dist., mkd. $\frac{1}{4}$ S27 BT.A pine, 24 ins. diam., bears N.2 $\frac{1}{2}$ °W., 57 lks. dist., mkd. $\frac{1}{4}$ S28 BT.

42.10 Desc. 138 ft. over NW. slope.

55.38 Ravine, course NE.; asc. 81 ft. over SE. slope.

64.50 Long spur, slopes NE.; desc. 70 ft. over NW. slope.

77.68 Ravine, course NE.; asc. 16 ft. over SE. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 21, 22, 27 and 28, with brass cap mkd.

T12N R13E

S21 | S22

S28 | S27

1934

from which

A pine, 24 ins. diam., bears N.33 $\frac{1}{4}$ °E., 35 lks. dist., mkd. T12N R13E S22 BT.

A fir, 10 ins. diam., bears S.15°E., 49 lks. dist., mkd. T12N R13E S27 BT.

A pine, 12 ins. diam., bears S.42 $\frac{3}{4}$ °W., 84 lks. dist., mkd. T12N R13E S28 BT.

SUBDIVISIONS OF T. 12 N., R. 13 E.

BOOK 4076

Chains

An oak, 8 ins. diam., bears N.5 $\frac{3}{4}$ °W., 20 lks. dist.,
mkd. T12N R13E S21 BT.

Land, level and rolling.

Soil, adobe, leaf mold, 2nd rate.

Timber, pine, fir, spruce and oak.

Undergrowth, 2nd growth pine and fir, locust, scrub oak.

N.89°59'E., on random line, bet. secs. 22 and 27.

40.00 Set temp $\frac{1}{4}$ Sec. cor.

80.02 A point 7 lks. N. of cor. of secs. 22, 23, 26 and 27.

Thence

N.89°58'W., on true line bet. secs. 22 and 27.

Desc. 69 ft. over W. slope, through medium pine and fir
timber and scattering undergrowth.

21.00 Drain, course N.; asc. 30 ft. over E. slope.

29.96 Long spur, slopes N.; desc. 28 ft. over NW. slope.

40.01 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 22

$\frac{1}{4}$
S 27

1934

from which

An oak, 14 ins. diam., bears N.5°E., 13 lks. dist.,
mkd. $\frac{1}{4}$ S22 BT.

A pine, 16 ins. diam., bears S.22°W., 40 lks. dist.,
mkd. $\frac{1}{4}$ S27 BT.

continue desc. 30 ft. over NW. slope.

50.00 Change to W. slope.; desc. 123 ft.

67.18 Ravine, course NE.; asc. 106 ft. over E. slope.

73.03 Spur, slopes NE.; desc. 52 ft. over NW. slope.

78.96 Drain, course NE.; asc. 19 ft. over SE. slope.

80.02 The cor. of secs. 21, 22, 27 and 28.

Land, rolling.

Soil, adobe, leaf mold, 2nd rate.

Timber, pine, fir, oak and aspen.

Undergrowth, 2nd growth pine and fir, locust, fern.


N.0°02'W., bet. secs. 21 and 22.

Over rolling land, through moderate pine, fir and oak
timber and patches of undergrowth.

Asc. 69 ft. over SE. slope.

SUBDIVISIONS OF T. 12 N., R. 13 E.

- Chains
 11.24 Change to along E. slope,; desc. 17 ft.
 19.04 Drain, course NE.; asc. 34 ft. over SE. slope.
 28.00 Short spur, slopes SE.; desc. 11 ft. over N. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.




from which

- A pine, 18 ins. diam., bears N.42 $\frac{3}{4}$ °E., 25 lks. dist., mkd. $\frac{1}{4}$ S22 BT.
 A pine, 24 ins. diam., bears N.15°W., 50 lks. dist., mkd. $\frac{1}{4}$ S21 BT.

Desc. 53 ft. over NE. slope.

- 60.00 Long spur, slopes NE.; desc. 27 ft. over NW. slope.
 69.07 Side hill drain, course NE.; asc. 59 ft. over SE. slope.
 77.50 Short spur, slopes E.; desc. 12 ft. over N. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 15, 16, 21 and 22, with brass cap mkd.



from which

- A pine, 16 ins. diam., bears N.84°E., 91 lks. dist., mkd. T12N R13E S15 BT.
 A pine, 18 ins. diam., bears S.45 $\frac{1}{2}$ °E., 72 lks. dist., mkd. T12N R13E S22 BT.
 A pine, 16 ins. diam., bears S.85°W., 15 lks. dist., mkd. T12N R13E S21 BT.
 A pine, 22 ins. diam., bears N.14 $\frac{3}{4}$ °W., 24 lks. dist., mkd. T12N R13E S16 BT.

Land, slightly rolling.
 Soil, adobe, 2nd rate.
 Timber, pine, fir and oak.
 Undergrowth, 2nd growth pine and fir, locust, fern.

- S.89°58'E., on random line, bet. secs. 15 and 22.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.08 A point 2 lks. N. of cor. of secs. 14, 15, 22 and 23.
 Thence
 N.89°57'W., on true line, bet. secs. 15 and 22.

SUBDIVISIONS OF T. 12 N., R. 13 E.

BOOK 4076

Chains

- Desc. 185 ft. over W. slope, through medium pine and fir timber and scattering undergrowth.
- 15.62 Canyon, 10 lks. wide, 3 ft. deep, course N.; asc. 215 ft. over SE. slope.
- 40.04 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\frac{1}{4} \begin{array}{c} S 15 \\ \hline S 22 \end{array}$$

1934

from which

A pine, 10 ins. diam., bears N.48°E., 31 lks. dist., mkd. $\frac{1}{4}$ S15 BT.

A pine, 6 ins. diam., bears S.24°E., 23 lks. dist., mkd. $\frac{1}{4}$ S22 BT.

Ascross level spur, slopes SE.

- 50.00 Desc. 59 ft. over W. slope.
- 54.53 Ravine, course SE.; asc. 124 ft. over E. slope.
- 80.08 The cor. of secs. 15, 16, 21 and 22.
- Land, rolling and mountainous.
Soil, rocky adobe, 2nd and 3rd rates.
Timber, fir, pine, aspen and spruce.
Undergrowth, 2nd growth pine and fir, locust, scrub oak.

N.0°02'W., bet. secs. 15 and 16.

Desc. 39 ft. over slightly rolling land, through medium pine, fir, aspen and oak timber and dense undergrowth.

- 6.57 Drain, course NE.; asc. 32 ft. over SE. slope.
- 17.37 Spur, slopes NE.; desc. 7 ft. over N. slope.
- 26.93 Line tree, a yellow pine, 22 ins. diam.
- 28.77 Drain, course SE.; asc. 15 ft. over SW. slope.
- 33.00 Over flat ridge, bears NE. and SW.
- 39.36 Winslow road, bears NE. and SW.
- 39.97 Telephone line, bears NE. and SW.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$S16 \quad \left| \quad S15 \right.$$

1934

from which

A pine, 10 ins. diam., bears N.38°E., 28 lks. dist., mkd. $\frac{1}{4}$ S15 BT.

SUBDIVISIONS OF T. 12 N., R. 13 E.

Chains	<p>A pine, 16 ins. diam., bears N.10$\frac{3}{4}$°W., 53 lks. dist., mkd. $\frac{1}{4}$ S16 BT.</p> <p>Continue across ridge.</p> <p>45.00 Long spur, slopes NW.; desc. 80 ft. over NE. slope.</p> <p>54.91 Drain, course NW.; asc. 7 ft. over SW. slope.</p> <p>59.90 Short spur, slopes NW.; desc. 40 ft. over NW. slope.</p> <p>68.67 Draw, course N.</p> <p>74.50 Leave draw, course N.15°E.; thence along E. slope.</p> <p>80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 9, 10, 15 and 16, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T12N</td> <td>R13E</td> </tr> <tr> <td>S9</td> <td>S10</td> </tr> <tr> <td>S16</td> <td>S15</td> </tr> </table> <p>1934</p> </div> <p style="text-align: right;">from which</p> <p>An oak, 10 ins. diam., bears N.76$\frac{3}{4}$°E., 20 lks. dist., mkd. T12N R13E S10 BT.</p> <p>A pine, 8 ins. diam., bears S.69$\frac{1}{2}$°E., 28 lks. dist., mkd. T12N R13E S15 BT.</p> <p>A pine, 28 ins. diam., bears S.49$\frac{1}{4}$°W., 56 lks. dist., mkd. T12N R13E S16 BT.</p> <p>A pine, 24 ins. diam., bears N.43$\frac{1}{4}$°W., 99 lks. dist., mkd. T12N R13E S9 BT.</p> <p>Land, gently rolling. Soil, adobe, leaf mold, 2nd rate. Timber, pine, oak and aspen. Undergrowth, 2nd growth pine, locust and fern.</p>	T12N	R13E	S9	S10	S16	S15
T12N	R13E						
S9	S10						
S16	S15						
40.00	<p>S.89°57'E., on random line bet. secs. 10 and 15.</p> <p>Set temp. $\frac{1}{4}$ sec. cor.</p> <p>80.02 A point 2 lks. S. of cor. of secs. 10, 11, 14 and 15.</p> <p>Thence</p> <p>N.89°58'W., on true line, bet. secs. 10 and 15.</p> <p>Desc. 25 ft. over rolling W. slope, through medium pine, fir and oak timber and scattering undergrowth.</p> <p>6.73 Draw, course S.; asc. 25 ft. over SE. slope.</p> <p>10.10 Short spur, slopes S.; desc. 71 ft. over SW. slope.</p> <p>20.00 Drain, course SE.; asc. 63 ft. over NE. slope.</p> <p>25.00 Over flat ridge, bears NE, and SW.</p>						

SUBDIVISIONS OF T. 12 N., R. 13 E.

BOOK 4076

Chains

40.01 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 10

 $\frac{1}{4}$

S 15

1934

from which

A pine, 24 ins. diam., bears N.13°E., 17 lks. dist., mkd. $\frac{1}{4}$ S10 BT.

A pine, 8 ins. diam., bears S.0°15'E., 49 lks. dist., mkd. $\frac{1}{4}$ S15 BT.

43.61 Winslow road, bears N.30°E. and S.70°W.

44.11 Telephone line, bears N.30°E. and S.70°W.; desc. 17 ft. over SW. slope.

53.41 Drain, course NW.; asc. 10 ft. over NE. slope.

56.31 Spur, slopes NW.; desc. 23 ft. over SW. slope.

63.79 Drain, course NW.; desc. 52 ft. over NW. slope.

78.45 Draw, course N.; asc. 19 ft. over E. slope.

80.02 The cor. of secs. 9, 10, 15 and 16.

Land, gently rolling.

Soil, adobe, 2nd rate.

Timber, pine, fir, oak and aspen.

Undergrowth, 2nd growth pine and fir, locust, fern.

N.0°02'W., bet. secs. 9 and 10.

Asc. 17 ft. over slightly rolling E. slope, through scattering pine and oak timber and medium undergrowth.

28.30 Road, bears N.20°E. and S.5°W.

29.80 Same road, bears S.20°E. and N.20°W.

32.30 Same road, bears N.20°E. and S.20°W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

 $\frac{1}{4}$

S9

S10

1934

from which

A pine, 20 ins. diam., bears N.44 $\frac{3}{4}$ °E., 31 lks. dist., mkd. $\frac{1}{4}$ S10 BT.

A pine, 26 ins. diam., bears S.71 $\frac{1}{2}$ °W., 60 lks. dist., mkd. $\frac{1}{4}$ S9 BT.

41.60 Road, bears S.25°E. and N.25°W.


49.00 Same road, bears S. and N.30°W.

53.55 Same road, bears S.25°W. and NE.

Chains

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 3, 4, 9 and 10, with brass cap mkd.



1934

from which

A pine, 8 ins. diam., bears N.33 $\frac{3}{4}$ °E., 63 lks. dist., mkd. T12N R13E S3 BT.

A pine, 30 ins. diam., bears S.30 $\frac{1}{4}$ °E., 109 lks. dist., mkd. T12N R13E S10 BT.

A pine, 11 ins. diam., bears S.33 $\frac{3}{4}$ °W., 89 lks. dist., mkd. T12N R13E S9 BT.

A pine, 5 ins. diam., bears N.29 $\frac{1}{4}$ °W., 35 lks. dist., mkd. T12N R13E S4 BT.

Land, rolling.

Soil, gravel adobe, 3rd rate.

Timber, pine, oak, aspen and fir.

Undergrowth, 2nd growth pine, locust and fern.

S.89°58'E., on random line, bet. secs. 3 and 10.

40.00

Set temp. $\frac{1}{4}$ sec. cor.

80.00

A point 9 lks. N. of cor. of secs. 2, 3, 10 and 11.

Thence

N.89°54'W., on true line bet. secs. 3 and 10.

Along gentle S. slope, through medium pine, fir and oak timber and scattering undergrowth.

2.59

Road, bears N. and S.

9.00

Desc. 67 ft. over SW. slope.

22.44


Drain, course N.65°W.; asc. 48 ft. over NE. slope.

35.00

Change to along N. slope.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



1934

from which

A pine, 20 ins. diam., bears N.9 $\frac{1}{4}$ °W., 30 lks. dist., mkd. S3 BT.

A pine, 6 ins. diam., bears S.30 $\frac{3}{4}$ °W., 46 lks. dist., mkd. S10 BT.

Asc. 11 ft. along N. slope.

SUBDIVISIONS OF T. 12 N., R. 13 E.

BOOK 4076

Chains

- 50.00 Short spur, slopes N.60°W.; desc. 80 ft. over SW. slope.
 57.50 Short drain, course NW.; thence along N. slope.
 68.40 Drain, 10 lks. wide, course N.15°E.
 69.60 Road, bears S.20°W. and N.25°E.
 80.00 The cor. of secs. 3, 4, 9 and 10.

Land, slightly rolling.
 Soil, adobe, 2nd rate.
 Timber, pine, fir, aspen and oak.
 Undergrowth, 2nd growth pine and fir, locust, fern.

N.0°02'W., bet. secs. 3 and 4.

Desc. 124 ft. along gentle W. slope, through medium pine, fir and oak timber and scattering undergrowth.

- 25.31 Road, bears NE. and SW.
 26.56 Fence, bears W. 1 ch., thence S.25°W.; and E. ~~7 1/2~~ chs.,
 thence N. 1 ch.
 28.77 Fence, bears N.75°W., 130 lks., thence N.25°E. and S.75°E.
 to junction of fences bearing N. and S.
 28.78 Intersect the 5-6 line of H.E.S. No. 189 at a point 2.92
 chs. S.67°35'E. of its cor. No. 6, which is a sandstone
 12x8x6 ins. above ground, marked cross (+) on top, 6
 H.E.S. 189 on NE. face, witnessed by two yellow pine
 bearing trees with legible marks as described in the
 official record.
 Cor. No. 5, a stone marked and witnessed as described in
 the official record, bears S.67°35'E., 3.08 chs. dist.
 Over patented land.
 33.96 Fence, bears N.15°E. and S.20°W.
 36.26 Intersect the 6-7 line of H.E.S. No. 189 at a point 6.91
 chs. N.23°E., of its cor. No. 6, hereinbefore described.
 Cor. No. 7, a stone, marked and witnessed as described in
 the official record, bears N.23°E., 23.12 chs. dist.
 Leave patented land; asc. 18 ft. over SW. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the
 ground to bedrock, and in a mound of stone to top, for
 1/4 sec. cor., with brass cap mkd.

1/4
 S4 | S3

1934

from which

A pine, 4 ins. diam., bears N.85 1/4°E., 17 lks. dist.,
 mkd. 1/4 S3 BT.

A pine, 4 ins. diam., bears S.88 1/2°W., 15 lks. dist.,
 mkd. 1/4 S4 BT.

Continue asc. 45 ft. over S. slope.

- 51.17 Short spur, slopes E.; desc. 17 ft. over NE. slope.
 55.10 Short draw, course S.60°E.; asc. 58 ft. over SE. slope.
 63.70 Spur, slopes N.80°E.; desc. 76 ft. over N. slope.

SUBDIVISIONS OF T. 12 N., R. 13 E.

Chains
 66.50 Fence, bears NE. and SW.
 74.45 Trail, bears E. and W.
 75.21 Low swale, course irregularly E.; asc. 17 ft. over SE. slope.
 79.21 Short drain, course S.25°E.; asc. 7 ft. along W. slope.
 80.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, and in a mound of stone, for cor. of lots 1 and 8 of sec. 4, and of lots 4 and 5 of sec. 3, with brass cap mkd.

S4	1 8	4 5	S3
1934			

Asc. 30 ft. along W. slope.

90.36 Intersect the 3rd Standard Parallel, North, At intersection Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for closing cor. of secs. 3 and 4, with brass cap mkd.

T13N R13E	
S33	
S4	S3
C C	
T12N R13E	
1934	

from which

A pine, 12 ins. diam., bears S.40³/₄°E., 88 lks. dist., mkd. T12N R13E S3 CC BT.

A pine, 18 ins. diam., bears S.31°W., 30 lks. dist., mkd. T12N R13E S4 CC BT.

From point of intersection the standard cor. of secs. 32 and 33, T. 13 N., R. 13 E., bears S.89°38'W., 20.79 chs. dist., and standard 1/4 sec. cor. of sec. 33, bears N.89°38'E., 19.53 Chs. dist., both hereinbefore described.

Land, rolling.
 Soil, adobe, 2nd rate.
 Timber, pine, oak and aspen.
 Undergrowth, 2nd growth pine, locust, scrub oak.

Beginning at the cor. of secs. 4, 5, 32 and 33, on the S. bdy of the Tp., reestablished under this group as described in book "A",

N.0°02'W., bet. secs. 32 and 33.

Along top of flat spur, slopes N., through medium pine, fir and oak timber and dense undergrowth.

5.00 Desc. 46 ft. over top of spur;

39.48 Old row of fence posts, bears E. and W.

SUBDIVISIONS OF T. 12 N., R. 13 E.

BOOK 4076

Chains

40.00 Set an iron post, 3 ft. long, 1 in. diam., 25 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
 S32 | S33
 1934

from which

A pine, 8 ins. diam., bears N. $32\frac{3}{4}^{\circ}$ E., 49 lks. dist., mkd. $\frac{1}{4}$ S33 BT.

A pine, 22 ins. diam., bears N. $72\frac{1}{4}^{\circ}$ W., 52 lks. dist., mkd. $\frac{1}{4}$ S32 BT.

42.00 Desc. 42 ft. over NE. slope.

45.50 Change to E. slope,; asc. 11 ft.

51.50 Over top of flat spur, slopes N. 25° E.

62.50 Desc. 136 ft. over NW. slope.

71.50 Willow Creek wash, 20 lks. wide, 3 ft. deep, in canyon bottom 1 ch. wide, course NE.; asc. 127 ft. over SE. slope.

71.70 Road, bears NE. and SW.

72.50 Telephone line, bears NE. and SW.

75.89 Cor. No. 2 of H.E.S. No. 185 bears E., 1.14 chs. dist. (this cor. erroneously mkd. for cor. No. 1) which is a stone 10x12x5 ins. mkd. with a cross (+) on top, 1 HES 185 on E. face, witnessed by a pine, 24 ins. diam., N. 14° W., 35 lks. dist., mkd. 1 HES 185 XBT; a pine, 36 ins. diam., bears S. 87° E., 46 lks. dist., mkd. 1 HES 185 XBT.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 28, 29, 32 and 33, with brass cap mkd.

T12N R13E
 S29 | S28
 S32 | S33

1934

from which

A pine, 12 ins. diam., bears N. 50° E., 12 lks. dist., mkd. T12N R13E S28 BT.

A pine, 6 ins. diam., bears S. $25\frac{1}{2}^{\circ}$ E., 53 lks. dist., mkd. T12N R13E S33 BT.

A pine, 6 ins. diam., bears S. $23\frac{3}{4}^{\circ}$ W., 12 lks. dist., mkd. T12N R13E S32 BT.

A pine, 12 ins. diam., bears N. $38\frac{1}{2}^{\circ}$ W., 50 lks. dist., mkd. T12N R13E S29 BT.

Land, rolling.

Soil, rocky adobe, 3rd rate.

Timber, pine, fir, aspen and spruce.

Undergrowth, 2nd growth pine and fir, locust, fern.

SUBDIVISIONS OF T. 12 N., R. 13 E.

Chains	S.89°53'E., on random line bet. secs. 28 and 33.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.94	A point 14 lks. S. of the cor. of secs. 27, 28, 33 and 34. Thence N.89°59'W., on true line bet. secs. 28 and 33. Asc. 77 ft. over slightly rolling E. slope, through medium pine, fir and oak timber and moderate undergrowth.
12.45	Spur, slopes NE.; desc. 90 ft. over W. slope.
26.62	Drain, course N.; asc. 89 ft. over E. slope.
39.44	Spur, slopes NE.
39.97	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	S 28 $\frac{1}{4}$ ————— S 33
	1934
	from which
	A pine, 8 ins. diam., bears S.11 $\frac{1}{4}$ °W., 45 lks. dist., mkd. $\frac{1}{4}$ S33 BT.
	A pine, 18 ins. diam., bears N.38°W., 56 lks. dist., mkd. $\frac{1}{4}$ S28 BT.
	Over top of flat ridge, bears N. and S.
46.95	Winslow road, bears N. and S.; desc. 200 ft. over W. slope.
62.58	Intersect 13-1 line; of HES No.185 at a point 1.68 chs. S.30°46'W. of its cor. No.13 (erroneously mkd. for cor. No. 12) which is a stone, 10x12x6 ins. mkd. with a cross (+) on top, 12 HES 185 on W. face, witnessed by a fir 30 ins. diam., N.22 $\frac{1}{2}$ °E., 12 lks. dist., mkd. 12 HES 185 XBT and a pine, 14 ins. diam.; S.48 $\frac{1}{2}$ °E.; 25 lks. dist., mkd. 12 HES 185 XBT. Cor. No.1 (erroneously mkd. for cor. No.13) bears S30°46'W., 13.67 chs. dist., which is a stone 14x9x7 ins. mkd. with a cross (+) on top, 13 HES 185 on N. face, witnessed by a pine, 14 ins. diam., S.42°W., 33 lks. dist., mkd. 13 HES 185 XBT, and a pine, 32 ins. diam., N.75°E., 17 lks. dist., mkd. 13 HES 185 XBT.
62.76	Over open valley.
63.26	Road, bears N. and S.
63.70	Telephone line, bears N. and S.
65.76	Willow Creek wash, 20 lks. wide, 3-ft. deep, course N.
67.95	Intersect 3-4 line of HES No.185, at a point 3.36 chs. N.37 $\frac{3}{4}$ °E., of its cor. No. 3 (erroneously mkd. for cor. No.2) which is a stone, 12x12x6 ins. mkd. with a cross (+) on top, 2 HES 185 on SE. face and witnessed by a pine, 18 ins. diam.; N.32 $\frac{3}{4}$ °E., 61 lks. dist., mkd. 2 HES 185 XBT, and a pine, 16 ins. diam., N.28°W., 23 lks. dist., mkd. 2 HES 185 XBT.

SUBDIVISIONS OF T. 12 N., R. 13 E.


Chains

- Asc. 127 ft., over SE. slope
- 73.08 Short spur, slopes S.; asc. 33 ft., along S. slope.
- 79.94 The cor. of secs. 28, 29, 32 and 33.

Land, rolling.
 Soil, adobe, leaf mold, 2nd rate.
 Timber, pine, fir, oak, aspen.
 Undergrowth, 2nd growth pine and fir, locust, fern.

N.0°02'W., bet. secs. 28 and 29.

- Asc. 62 ft., over rolling S. slope, through moderate pine, fir and oak timber and scattering undergrowth.
- 5.92 Over top of spur, slopes N. 20° E.
- 15.00 Desc. 107 ft., along W. slope.
- 39.00 Drain, course N. 10° E.; over E. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. with brass cap mkd.




from which

A douglas fir, 8 ins. diam., bears S. 70 $\frac{1}{4}$ °E., 29 lks. dist. mkd. $\frac{1}{4}$ S28 BT.

A pine, 16 ins. diam., bears N. 42 $\frac{1}{2}$ °W., 37 lks. dist. mkd. $\frac{1}{4}$ S29 BT.

Asc. 20 ft. along E. slope.

- 58.70 Change to S. slope, asc. 50 ft.
- 71.00 Low rise, bears NE. desc. 40 ft., over N. slope.
- 78.37 Swale, course E.; asc. 5 ft. over SE. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 20, 21, 28 and 29, with brass cap mkd.



from which

An oak, 10 ins. diam., bears N. 25°E., 48 lks. dist., mkd. T12N R13E S21 BT.

An oak, 6 ins. diam., bears S. 54 $\frac{1}{4}$ °E., 83 lks. dist., mkd. T12N R13E S28 BT.

A fir, 18 ins. diam., bears S. 34 $\frac{1}{2}$ °W., 19 lks. dist., mkd. T12N R13E S29 BT.

A fir, 6 ins. diam., bears N. 42°W., 37 lks. dist., mkd. T12N, R13E S20 BT.

Chains

Land, rolling.
Soil, adobe, leaf mold, 2nd rate.
Timber, pine; fir, oak, aspen.
Undergrowth, 2nd growth pine and fir, locust, scrub oak, fern.

S.89°59'E., on random line, bet. secs. 21 and 28.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.92 A point 9 lks. N. of cor. of secs. 21, 22, 27 and 28.

Thence

N.89°55'W., on true line, bet. secs. 21 and 28.

Asc. 70 ft. over rolling SE. slope, through medium pine, fir, spruce and oak timber and scattering undergrowth.

11.53 Change to S. slope.

15.00 Small drain, course SE.; asc. 60 ft., over E. slope

37.60 Winslow road, bears NE. and SW.

39.96 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 21

$\frac{1}{4}$ —————
S 28

1934

from which

An oak, 6 ins. diam., bears N. 12 $\frac{3}{4}$ °E., 34 lks. dist., mkd. $\frac{1}{4}$ S21 BT.

A pine, 7 ins. diam., bears S. 15 $\frac{1}{2}$ °E., 24 lks. dist., mkd. $\frac{1}{4}$ S28 BT.

Desc. 188 ft. over W. slope.

57.84 Road, bears N.15° E. and S.15°W.

58.02 Telephone line, bears N. 15°E. and S.15°W.

58.87 Willow Creek, 6 lks. wide, 3 ins. deep, in stream bed 20 lks. wide, course N.15°E.; asc. 88 ft. over SE. slope.

65.45 Small drain, course S.70°E.; asc. 86 ft., over N. slope.

74.22 Same drain, course E.; asc. 23 ft., over SE. slope

79.92 The cor. of secs. 20, 21, 28 and 29.

Land, gently rolling.
Soil, adobe, 2nd rate.
Timber, pine, fir, oak, aspen.
Undergrowth, 2nd growth pine and fir, maple, locust, fern.

N.0°02'W., bet. secs. 20 and 21.

Over rolling SE. slope, through medium pine, fir and oak timber and scattering undergrowth.

SUBDIVISION OF T. 12 N., R. 13 E.

BOOK 4076

- Chains
 2.70 Change to NE. slope, desc. 36 ft.
 5.38 Drain, course NE.; asc. 17 ft., along E. slope.
 18.00 Short spur, slopes NE.; desc. 37 ft., over NW. slope.
 21.12 Change to along E. slope, asc. 26 ft.
 30.52 Change to NE. slope, desc. 61 ft.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ | \\ \text{S20} \quad | \quad \text{S21} \\ 1934 \end{array}$$

from which

- A pine, 16 ins. diam., bears N. $70\frac{1}{2}^{\circ}$ E., 26 lks. dist., mkd. $\frac{1}{4}$ S21 BT.
 A pine, 14 ins. diam., bears N. $29\frac{1}{2}^{\circ}$ W., 14 lks. dist., mkd. $\frac{1}{4}$ S20 BT.

- 43.20 Spur, slopes NE.; desc. 105 ft., over N. slope.
 53.67 Blazed trail, bears NW. and SE.
 73.23 Draw, 10 lks. wide, course NW.; asc. 47 ft., over W. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 16, 17, 20 and 21, with brass cap mkd.

$$\begin{array}{c} \text{T12N} \quad | \quad \text{R13E} \\ \text{S17} \quad | \quad \text{S16} \\ \hline \text{S20} \quad | \quad \text{S21} \\ 1934 \end{array}$$

from which

- A pine, 18 ins. diam., bears N. $7\frac{1}{2}^{\circ}$ E., 62 lks. dist., mkd. T12N R13E S16 BT.
 A pine, 18 ins. diam., bears S. 26° E., 62 lks. dist., mkd. T12N R13E S21 BT.
 A pine, 10 ins. diam., bears S. 9° W., 80 lks. dist., mkd. T12N R13E S20 BT.
 A pine, 16 ins. diam., bears N. $11\frac{1}{2}^{\circ}$ W., 84 lks. dist., mkd. T 12N R13E S17 BT.

Land, slightly rolling.
 Soil, adobe, leaf mold, 2nd rate.
 Timber, pine, fir, aspen, oak.
 Undergrowth, 2nd growth pine and fir, locust, maple, fern.

- S. $89^{\circ}55'E.$, on random line, bet. secs. 16 and 21.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.92 The cor. of secs. 15, 16, 21 and 22.
 Thence

SUBDIVISIONS OF T 12 N., R. 13 E.

Chains	
	N. 89°55'W., on true line, bet. secs. 16 and 21. Over slightly rolling E. slope, through moderate pine, fir, aspen and spruce timber and dense undergrowth.
23.80	Telephone line, bears NE. and SW.
27.80	Winslow road, bears NE. and SW.
35.00	Desc. 39 ft., over W. slope.
39.96	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4} \begin{array}{c} S 16 \\ \hline S 21 \\ 1934 \end{array}$
	from which
	A pine, 18 ins. diam., bears S. 37 $\frac{1}{2}$ °E., 48 lks. dist., mkd. $\frac{1}{4}$ S21 BT.
	A pine, 6 ins. diam., bears N. 31°W., 21 lks. dist., mkd. $\frac{1}{4}$ S16 BT.
	Desc. 105 ft., over W. slope.
47.24	Willow Creek, 6 lks. wide, 3 ins. deep, in stream bed 20 lks. wide, 4 ft. deep, course N. 25°W.; asc. 124 ft. over NE. slope.
58.87	Short spur, slopes NE.; desc. 11 ft., over NW. slope.
63.25	Drain, course NE.; asc. 52 ft., over SE. slope.
71.81	Long spur, slopes N.; desc. 48 ft., over W. slope.
79.92	The cor. of secs. 16, 17, 20 and 21. Land, gently rolling. Soil, adobe, 2nd rate. Timber, pine, fir, oak, aspen. Undergrowth, 2nd growth pine and fir, locust, fern.
	N.0°02'W., bet. secs. 16 and 17. Asc. 47 ft., along rolling W. slope, through medium pine, fir and oak timber and scattering underbrush.
11.96	Short rise, slopes NW.; desc. 79 ft., over N. slope.
26.79	Short draw, course NW.; asc. 17 ft., along W. slope.
30.70	Desc. 8 ft.
32.08	Short drain, course SW.; asc. 51 ft., over SW. slope.
37.80	Over top of ridge, bears NW. and SE.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, and in a mound of stone, for $\frac{1}{4}$ sec. cor. with brass cap mkd.

$$S17 \begin{array}{c} \frac{1}{4} \\ | \\ S16 \end{array}$$

1934

SUBDIVISIONS OF T. 12 N., R. 13 E.

BOOK 4076

Chains

from which

A pine, 6 ins. diam., bears N. $37\frac{3}{4}^{\circ}$ E., 49 lks. dist.,
mkd. $\frac{1}{4}$ S16 BT.

A pine, 6 ins. diam., bears N. $31\frac{1}{4}^{\circ}$ W., 44 lks. dist.,
mkd. $\frac{1}{4}$ S17 BT.

Desc. 96 ft., along E. slope.


59.66 Short draw, course E., asc. 48 ft., over SE. slope.

66.57 Top of asc.; desc. 60 ft., over NE. slope.

70.68 Drain, course N. 75° E.; asc. 7 ft., along E. slope.

73.88 Short spur, slopes E., desc. 31 ft., over N. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins., in
the ground, for cor. of secs. 8, 9, 16 and 17, with
brass cap mkd.



from which

A forked pine, 12 ins. diam., bears N. $31\frac{1}{4}^{\circ}$ E., 34 lks.
dist., mkd. T12N R13E S9 BT.

A pine, 16 ins. diam., bears S. 26° E., 57 lks. dist.,
mkd. T12N R13E S16 BT.

A pine, 26 ins. diam., bears S. $51\frac{1}{4}^{\circ}$ W., 42 lks. dist.,
mkd. T12N R13E S17 BT.

A pine, 14 ins. diam., bears N. $49\frac{1}{2}^{\circ}$ W., 76 lks. dist.,
mkd. T12N R13E S8 BT.

Land, rolling.

Soil, adobe 2nd rate.

Timber, pine, fir, oak, aspen.

S. $89^{\circ}55'$ E., on random line, bet. secs. 9 and 16.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.92 The cor. of secs. 9, 10, 15 and 16.

Thence

N. $89^{\circ}55'$ W., on true line, bet. secs. 9 and 16.

Asc. 50 ft., over rolling E. slope, through moderate pine,
fir and oak timber and scattering underbrush.

5.87 Road, bears N. and S.

7.02 Ridge, bears N. and S.; desc. 57 ft., over W. slope.

12.95 Draw, course N.; asc. 59 ft., over E. slope.

19.08 Spur, slopes N.; thence along general N. slope.

SUBDIVISIONS OF T. 12 N., R. 13 E.

Chains	
25.87	Ridge, bears N. 20°W., and S. 20°E., desc. 60 ft., over W. slope.
37.32	Drain, course NW.; asc. 31 ft., over E. slope.
39.96	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4}$ S 9 <hr style="width: 50px; margin: auto;"/> S16 1934
	from which
	A pine, 14 ins. diam.; bears S. 33°W.; 67 lks. dist., mkd. $\frac{1}{4}$ S16 BT.
	An oak, 16 ins. diam., bears N. 53 $\frac{1}{2}$ °W., 27 lks. dist., mkd. $\frac{1}{4}$ S9 BT.
	Asc. 12 ft. over E. slope.
43.90	Ridge, bears NW. and SE.; desc. 92 ft., over NW. slope.
62.55	Short drain, course NW., asc. 37 ft., over NE. slope.
67.95	Short spur, slopes N.; desc. 126 ft., over W. slope.
76.55	Willow Creek, 10 lks. wide, 4 ins. deep, course N. 20°E., asc. 92 ft., over E. slope.
79.92	The cor. of secs. 8, 9, 16 and 17.
	Land, rolling. Soil, adobe 2nd rate. Timber, pine, fir, oak, aspen. Undergrowth, 2nd growth pine and fir, locust, scrub oak.
	N. 0°02'W., bet. secs. 8 and 9.
	Asc. 53 ft., over rolling NE. slope, through medium pine and fir timber and scattering underbrush.
8.36	Tip of spur, slopes NE.; desc. 204 ft., over N. slope.
29.90	Creek, 20 lks. wide, 3 ins. deep, course NW. 5 chs. thence N.; asc. 66 ft., over SW. slope.
38.37	Over broken bench, slopes W.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor. with brass cap mkd.
	$\frac{1}{4}$ S8 S9 <hr style="width: 50px; margin: auto;"/> 1934
	from which
	A pine, 10 ins. diam., bears S. 87 $\frac{3}{4}$ °E., 26 lks. dist., mkd. $\frac{1}{4}$ S9 BT.
	A pine, 8 ins. diam., bears S. 54 $\frac{1}{2}$ °W., 34 lks. dist., mkd. $\frac{1}{4}$ S8 BT.

SUBDIVISIONS OF T. 12 N., R. 13 E.

BOOK 4076

Chains

Continue over bench.

57.60 Leave bench; desc. 92 ft. over NW. slope.


63.65 Creek, 20 lks. wide, 4 ins. deep, course NE.; asc. 12 ft. over SE. slope.

67.00 Short spur, slopes E.; desc. 21 ft. over N. slope.

69.26 Same creek, course NW.; asc. 99 ft. over SW. slope.

75.34 Top of ascent, thence along W. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 29 ins. in the ground, for cor. of secs. 4, 5, 8 and 9, with brass cap mkd.



1934

from which

A pine, 36 ins. diam., bears N.21°E., 65 lks. dist., mkd. T12N R13E S4 BT.

A pine, 6 ins. diam., bears S.28½°E., 77 lks. dist., mkd. T12N R13E S9 BT.

A pine, 6 ins. diam., bears S.28½°E., 88 lks. dist., mkd. T12N R13E S8 BT.

A pine, 26 ins. diam., bears N.79°W., 34 lks. dist., mkd. T12N R13E S5 BT.

Land; rolling.

Soil; adobe, 2nd rate.

Timber; pine, fir, oak and aspen.

Undergrowth, 2nd growth pine, fir, locust and fern.

S.89°55'E., on random line, bet. secs. 4 and 9.

40.00 Set temp. ¼ Sec. cor.

79.74 A point 5 lks. S. of cor. of secs. 3, 4, 9 and 10.

Thence

N.89°57'W., on true line, bet. secs. 4 and 9


Desc. 72 ft. over rolling W. slope, through medium pine, fir, and oak timber and scattering underbrush.

12.58 Drain, course N.; asc. 86 ft. over SE. slope.

13.30 Old road, bears N. and S.

24.75 Over bench, slopes N.

39.87 Set an iron post, 3 ft. long, 1 in. diam., 25 ins. in the ground, for ¼ sec. cor., with brass cap mkd.



1934

from which

A pine, 16 ins. diam., bears N.4¼°W., 25 lks. dist., mkd. ¼ S4 BT.

SUBDIVISIONS OF T. 12 N., R. 13 E.

Chains

A pine, 24 ins. diam., bears S.27 $\frac{1}{2}$ °E., 43 lks. dist., mkd. $\frac{1}{4}$ S9 BT

Desc. 17 ft. over NW. slope.

43.80 Gulch, course NE.; asc. 36 ft. over SE. slope.

52.44° Old road, bears NE. and SW.; over short flat spur, slopes NE.

58.26 Desc. 68 ft. over NW. slope.

65.26 Drain, course SW.; asc. 65 ft. over SE. slope.

75.50 Ridge, bears N. and S.; desc. 29 ft. over W. slope.

79.74 The cor. of secs. 4, 5, 8 and 9.

Land; slightly rolling.

Soil; adobe, 2nd rate.

Timber; pine, fir, oak and aspen.

Undergrowth; 2nd growth pine and fir, locust and fern.

N.0°02'W., bet. secs. 4 and 5.

Over rolling W. slope, through medium pine, fir and oak timber and scattering undergrowth.

12.00 Long spur, slopes NW.; desc. 64 ft. over NE. slope.

38.64 Blazed trail, bears NW. and SE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$

S5 | S4

1934

from which

A pine, 12 ins. diam., bears N.58 $\frac{1}{2}$ °W., 18 lks. dist., mkd. $\frac{1}{4}$ S5 BT.

A pine, 14 ins. diam., bears N.87°E., 18 lks. dist., mkd. $\frac{1}{4}$ S4 BT.

Continue desc. 11 ft over NE. slope.

50.00 Change to E. slope, asc. 24 ft.

58.30 Desc. 279 ft. over N. slope.

80.00 True point for cor. of lots 1 and 8 of sec. 5, and of lots 4 and 5 of sec. 4, falls in Bear Creek, course E., where it is impracticable to set cor., therefore establish witness cor. 40 lks. N.0°02'W.

80.10 Bear Creek, 10 lks. wide, 3 ins. deep, in canyon 50 lks. wide, course E.

80.40 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground, and in a mound of stone, for witness corner to lots 1 and 8 of sec. 5, and of lots 4 and 5 of sec. 4, with brass cap marked

S5 ——— 1 | 4 ——— S4
8 | 5

WC

1934

SUBDIVISIONS OF T.12 N., R. 13 E.

BOOK 4076

Chains

- 80.35 Asc. 171 ft.; over SE. slope.
- 86.75 Short spur, slopes SE.; desc. 45 ft. over N. slope.
- 89.84 Intersect the Third Standard Parallel North. At intersection
Set an iron post, 3 ft. long, 2 ins. diam., 22 ins. in the ground, and in a mound of stone, for closing cor. of secs. 4 and 5, with brass cap mkd.

T13N R13E

S32

S5 | S4

C | C

T12N R13E

1934

from which

A pine, 16 ins. diam., bears S.45°E., 65 lks. dist., mkd. T12N R13E S4 CC BT.

A fir, 16 ins. diam., bears S.57½°W., 55 lks. dist., mkd. T12N R13E S5 CC BT.

From point of intersection the standard cor. of secs. 31 and 32, T13N., R13E., bears S.89°27'W., 21.95 chs. dist., and standard ¼ sec. cor. of sec. 32 bears N.89°27'E., 18.42 chs. dist., both hereinbefore described.

Land; rolling to mountainous.
Soil: adobe, 2nd and 3rd rate.
Timber: pine, fir, oak, aspen and spruce.
Undergrowth: 2nd growth pine and fir, scrub oak, locust, fern.

Beginning at the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., reestablished under this group as described in notes of resurvey of that line.

N.0°03'W., bet. secs. 31 and 32.

Desc. 35 ft. over rolling N. slope, through medium pine, fir, spruce and aspen timber and dense undergrowth.

- 6.50 Drain, course E.; asc. 34 ft. over SE. slope.
- 13.77 Spur, slopes E.; desc. 44 ft. over N. slope.
- 21.40 Change to along W. slope.
- 30.00 Desc. 31 ft.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground, supported in a mound of stone, for ¼ sec. cor., with brass cap mkd.

S31 | S32

1934

from which

SUBDIVISIONS OF T. 12 N., R. 13 E.

Chains

A pine, 11 ins. diam., bears S.27°E., 44 lks. dist., mkd. $\frac{1}{2}$ S32 BT.

A fir, 15 ins. diam., bears N.84 $\frac{1}{2}$ °W., 22 lks. dist., mkd. $\frac{1}{2}$ S31 BT.

Desc. 155 ft. over W. slope.

49.97 Bear Creek, 25 lks. wide, 3 ins. deep, in stream bed, 80 lks. wide, course NE. 2 chs., thence N.; asc. 49 ft. over SE. slope.

52.24 Sandstone spur, slopes SE.; desc. 18 ft. along E. slope.

57.72 Short ravine, course S.65°E.; asc. 185 ft. over S. slope.

76.50 Spur, slopes E.; desc. 11 ft. over N. slope.

78.24 Line tree, yellow pine 12 ins. diam.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 29, 30, 31 and 32, with brass cap mkd.

T12N	R13E
S30	S29
S31	S32
1934	

from which

An oak, 15 ins. diam., bears N.25°38'E., 106 lks. dist., mkd. T12N R13E S29 BT.

An oak, 4 ins. diam., bears S.41 $\frac{1}{2}$ °E., 31 lks. dist., mkd. T12N R13E S32 BT.

An oak, 5 ins. diam., bears S.64 $\frac{1}{2}$ °W., 65 lks. dist., mkd. T12N R13E S31 BT.

A pine, 6 ins. diam., bears N.53 $\frac{1}{2}$ °W., 28 lks. dist., mkd. T12N R13E S30 BT.

Land: rolling.

Soil: adobe, leaf mold, 1st and 2nd rate.

Timber: fir, pine, spruce, oak and aspen.

Undergrowth: 2nd growth pine and fir, locust, vine maple manzanita, fern.

S.89°53'E., on random line, bet. secs. 29 and 32.

40.00 Set temp. $\frac{1}{2}$ sec. cor.

79.86 A point 2 lks. S. of secs. 28, 29, 32 and 33.

Thence

N.89°54'W., on true line, bet. secs. 29 and 32.

Asc. 64 ft. over rolling SE. slope, through moderate pine fir, and oak timber and dense undergrowth.

7.93 Ridge, bears N.30°E., and S.20°W.; desc. 218 ft. over W. slope.

21.60 Ravine, course N.20°W.; asc. 156 ft. over NE. slope.

SUBDIVISIONS OF T. 12 N., R. 13 E.

BOOK 4076

Chains

- 36.02 Short spur, slopes N.; desc. 105 ft. over NW. slope.
- 39.93 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
 $\frac{1}{4}$ $\frac{S29}{S32}$
 1934
 from which
 A fir, 6 ins. diam., bears N. $41\frac{1}{2}^{\circ}$ E., 65 lks dist., mkd. S29 BT.
 A fir, 12 ins. diam., bears S. 19° E., 43 lks. dist., mkd. S32 BT.
- 40.78 Ravine, course NW.; asc. 100 ft. over NE. slope.
- 45.80 Abrupt spur, slopes N.; desc. 158 ft. over NW. slope.
- 54.34 Bear Creek, 30 lks. wide, course NE.; thence N.; asc. 268 ft. over SE. slope.
- 77.90 Ridge, bears NE. and SW.; over W. slope.
- 79.86 The cor. of secs. 29, 30, 31 and 32.

Land: rolling.
 Soil: adobe, leaf mold, 2nd rate.
 Timber: pine, fir, spruce, oak and aspen.
 Undergrowth: 2nd growth pine and fir, locust, fern.

-
- N. $89^{\circ}53'$ W., on random line, bet. secs. 30 and 31.
 - 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 - 79.98 Intersect W. bdy. of Tp., 5 lks. N. of cor. of secs. 25, 30, 31 and 36, hereinbefore described.
 Thence
 S. $89^{\circ}55'$ E., on true line, bet. secs. 30 and 31.
 Desc.; 51 ft. over rolling NE. slope, through moderate fir, pine and oak timber, and dense undergrowth.
 - 2.90 Ravine, course N.: asc. 43 ft. over W. slope.
 - 8.00 Spur, slopes N.; desc. 162 ft. over NE. slope.
 - 19.32 Drain, course N.; asc. 216 ft. over W. slope.
 - 32.12 Spur, slopes N.; desc. 20 ft. over NE. slope.
 - 39.98 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
 $\frac{1}{4}$ $\frac{S30}{S31}$
 1934
 from which
 An aspen, 14 ins. diam., bears N. $31\frac{1}{2}^{\circ}$ W., 45 lks. dist., mkd. $\frac{1}{4}$ S30 BT.
 An aspen, 6 ins. diam., bears S. $32\frac{1}{2}^{\circ}$ E., 86 lks. dist., mkd. $\frac{1}{4}$ S31 BT.

SUBDIVISIONS OF T. 12 N., R. 13 E.

Chsins

40.50 Drain, course N.; asc. 50 ft. over W. slope.

50.37 Over flat spur, slopes NE.

55.50 Desc. 54 ft. over SE. slope.

62.50 Drain, course NE.; asc. 33 ft. over W. slope.

79.98 The cor. of secs. 29, 30, 31 and 32.

Land: rolling.

Soil: adobe, leaf mold, 2nd rate.

Timber: pine, fir, spruce; aspen and oak.

Undergrowth: 2nd growth pine and fir, locust, fern.

H. 0°03'W., bet. secs. 29 and 30.

Desc. 118 ft. along rolling W. slope, through medium pine, fir and oak timber and moderate undergrowth.

28.00 Drain, course NE.; thence along E. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S30 | S29
1934

from which

A pine, 4 ins. diam., bears S. 4 $\frac{1}{2}$ °E., 39 lks. dist., mkd. S29 BT.

An oak, 6 ins. diam., bears N. 23 $\frac{1}{2}$ °W., 63 lks. dist., mkd. $\frac{1}{4}$ S30 BT.

Asc. 16 ft. along E. slope.

54.00 Short spur, slopes E.; desc. 96 ft. over NE. slope.

77.24 Drain, course NW.; over W. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 4 ins. in the ground, and in a mound of stone, for cor. of secs. 19, 20, 29 and 30, with brass cap mkd.

T12N | R13E
S19 | S20
S30 | S29
1934

from which

A pine, 16 ins. diam., bears N. 24°E., 50 lks. dist., mkd. T12N R13E S20 BT.

A pine, 20 ins. diam., bears S. 50°E., 25 lks. dist., mkd. T12N R13E S29 BT.

A pine, 16 ins. diam., bears S. 9 $\frac{1}{2}$ °W., 49 lks. dist., mkd. T12N R13E S30 BT.

A spruce, 11 ins. diam., bears N. 22 $\frac{1}{2}$ °W., 43 lks. dist., mkd. T12N R13E S19 BT.

SUBDIVISIONS OF T. 12 N., R. 13 E.

BOOK 4076

Chains

Land: rolling.
Soil: adobe, leaf mold, 2nd rate.
Timber: pine, fir, spruce and oak.
Undergrowth: 2nd growth pine and fir, locust, fern.

S.89°54'E., on random line, bet. secs. 20 and 29.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.74 A point 3 lks. S. of cor. of secs. 20, 21, 28 and 29.

Thence

N.89°55'W., on true line, bet. secs. 20 and 29.

Asc. 29 ft. over rolling E. slope, through medium pine and oak timber and dense undergrowth.

5.34 Long spur, slopes N.; desc. 61 ft. over NW. slope.

20.68 Change to N. slope; desc. 36 ft.

24.18 Spur slopes NW.; desc. 115 ft. over W. slope.

29.71 Bear Creek, channel 10 lks. wide, course N.; asc. 83 ft. over SE. slope.

39.87 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
$$\frac{1}{4} \frac{S20}{S29}$$

1934

from which

A pine, 14 ins. dia., bears S.9°E., 60 lks. dist., mkd. $\frac{1}{4}$ S29 BT.A pine, 16 ins. diam., bears N.18 $\frac{1}{2}$ °W., 74 lks. dist., mkd. S20 BT.

Asc. 156 ft. over SE. slope.

46.74 Road, bears NW. and SE.

50.55 Long spur, slopes NE.

61.60 Old road, bears N. and S.; desc. 95 ft. over W. slope.

79.74 The cor. of secs. 19, 20, 29 and 30.

Land: rolling.
Soil: adobe, 2nd rate.
Timber: pine, fir, spruce, oak and aspen.
Undergrowth: 2nd growth pine and fir, locust, fern.

N.89°55'W., on random line, bet. secs. 19 and 30.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.30 Intersect W. bdy. of Tp., 14 lks. N. of cor. of secs. 19, 24, 25 and 30 hereinbefore described

Thence

N.89°59'E., on true line, bet. secs. 19 and 30.

SUBDIVISIONS OF T. 12 N., R. 13 E.

Chains

Asc. 16 ft. over rolling W. slope, through moderate pine fir and oak timber and dense undergrowth.

4.15 Long spur, slopes N.10°E.; desc. 129 ft. over NE. slope.

19.25 Canyon, course N.10°W.; asc. 92 ft. over SW. slope.

25.49 Spur, slopes NW.; desc. 140 ft. over NE. slope.

31.39 Canyon, course N.10°W.; asc. 185 ft. over SW. slope.

40.30 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor., with brass cap mk.

1/4 S19
S30

1934

from which

A pine, 8 ins. diam., bears N.32 1/2°W., 84 lks. dist., mkd. 1/4 S19 BT.

A pine, 18 ins. diam., bears S.59°E., 38 lks. dist., mkd. 1/4 S30 BT.

Asc. 30 ft. over SW. slope.

43.21 Over short spur, slopes NW.

52.00 Long spur, slopes NE.; desc. 66 ft. over E. slope.

64.73 Drain, course NW.; asc. 58 ft. over W. slope.

69.10 Long spur, slopes N.; desc. 64 ft. over NE. slope.

78.52 Drain, course NW.; asc. 16 ft. over W. slope.

80.30 The cor. of secs. 19, 20, 29 and 30.

Land: rolling.

Timber: pine, fir, oak, spruce, and aspen

Soil: adobe, leaf mold, 2nd rate.

Undergrowth: 2nd growth pine and fir, locust, fern.

N.0°03'W., bet. secs. 19 and 20.

Along slightly rolling W. slope, through medium pine and fir timber and dense undergrowth.

9.10 Desc. 32 ft. over NW. slope.

12.89 Drain course W.; asc. 29 ft. over SW. slope.

18.00 Change to NW. slope. desc. 48 ft.

23.11 Draw, course W.; asc. 69 ft. over SW. slope.

30.83 Top of asc.; desc. 37 ft. over N. slope.

37.20 Small drain, course N.80°W.; asc. 14 ft. over S. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.

1/4
S19 | S20

1934

from which

SUBDIVISIONS OF T. 12 N., R. 13 E.

BOOK 4076

Chains	<p>A pine, 18 ins. diam., bears N.11$\frac{1}{2}$°W., 25 lks. dist., mkd. $\frac{1}{4}$ S19 BT.</p> <p>A pine, 12 ins. diam., bears N.16°E., 47 lks. dist., mkd. $\frac{1}{4}$ S20 BT.</p> <p>Desc. 46 ft. over N. slope.</p> <p>47.05 Wash, 10 lks wide, course W.; asc. 12 ft. over SW. slope.</p> <p>49.54 Top of asc.; desc. 57 ft. over N. slope.</p> <p>55.96 Draw, course W.; asc. 59 ft. over S. slope.</p> <p>65.89 Top of asc.; thence across broken flat ridge bears N. and SE.</p> <p>80.00 Set an iron post, 3 ft. long, 2 ins. diam., 29 ins. in the ground, for cor of secs. 17, 18, 19 and 20, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T12N</td> <td>R13E</td> </tr> <tr> <td>S18</td> <td>S17</td> </tr> <tr> <td colspan="2"><hr/></td> </tr> <tr> <td>S19</td> <td>S20</td> </tr> </table> <p>1934</p> <p>from which</p> <p>A pine, 4 ins. diam., bears N.31$\frac{1}{2}$°E., 34 lks. dist., mkd. T12N R13E S17 BT.</p> <p>A pine, 5 ins. diam., bears S.37$\frac{1}{2}$°E., 38 lks. dist., mkd. T12N R13E S20 BT.</p> <p>A pine, 8 ins. diam., bears S.39$\frac{1}{2}$°W., 35 lks. dist., mkd. T12 N R13E S19 BT</p> <p>A pine, 6 ins. diam., bears N.9°W., 13 lks. dist., mkd. T12N R13E S18 BT.</p> <p>Land: rolling. Soil: adobe, 2nd rate. Timber: pine, fir, aspen and oak. Undergrowth: 2nd growth pine and fir, locust, fern.</p> <hr/> <p>S.89°55'E., on random line, bet. secs. 17 and 20.</p> <p>40.00 Set temp. $\frac{1}{4}$ sec. cor.</p> <p>79.60 A point 7 lks. N. of cor. of secs. 16, 17, 20 and 21.</p> <p>Thence</p> <p>N.89°52'W., on true line, bet. secs. 17 and 20.</p> <p>Desc. 71 ft. over rolling W. slope, through medium pine, fir and oak timber and scattering undergrowth.</p> <p>3.45 Short ravine, course NW.; asc. 51 ft. along N. slope.</p> <p>8.87 Short spur, slopes NW.; desc. 110 ft. over W. slope.</p> <p>18.65 Bear Creek, stream 20 lks. wide, 4 ins. deep, in stream bed, 60 lks. wide, course N.; asc. 206 ft. over E. slope.</p> <p>32.60 Spur, slopes N.; desc 38 ft. over W. slope.</p> </div>	T12N	R13E	S18	S17	<hr/>		S19	S20
T12N	R13E								
S18	S17								
<hr/>									
S19	S20								

SUBDIVISIONS OF T. 12 N., R. 13 E.

Chains

39.80 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\frac{S17}{S20}$$

.1934

from which

A pine, 30 ins. diam., bears N.11°E., 27 lks. dist., mkd. $\frac{1}{4}$ S17 BT.

A pine, 5 ins. diam., bears S.46 $\frac{1}{2}$ °E., 45 lks. dist., mkd. $\frac{1}{4}$ S20 BT.

Asc. 18 ft. over NE. slope.

43.10 Spur, course N.; desc. 70 ft. over W. slope.

49.42 Drain, course N.; asc. 74 ft. over E. slope.

51.50 Over flat ridge, bears N. and S.

59.80 Road, bears N. and S.; desc. 51 ft. over NW. slope.

69.45 Drain, course N.15°E.; asc. 38 ft. over E. slope.

77.80 Road, bears NW. and SE.

79.60 The cor. of secs. 17, 18, 19 and 20.

Land: rolling.

Soil: adobe, 2nd rate.

Timber: pine, fir oak and aspen.

Undergrowth: 2nd growth pine and fir, locust, fern.

S.89°59'W., on random line, bet. secs. 18 and 19.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.95 Intersect W. bdy. of Tp., 9 lks. S. of cor. of secs. 13, 18, 19 and 24, hereinbefore described.

Thence

S.89°57'E., on true line, bet. secs. 18 and 19.

Desc. 42 ft. over rolling SE. slope, through moderate pine, fir and oak timber and scattering undergrowth.

2.52 Drain, course NE.; asc. 65 ft. over NW. slope.

10.68 Spur, slopes NE.; desc. 225 ft. over SE. slope.

33.33 Beaver Creek Canyon, stream in bottom, 20 lks. wide, 4 ins. deep, course N.; asc. 153 ft. over W. slope.

39.95 Set an iron post, 3 ft. long, 1 in. diam., 32 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\frac{S18}{S19}$$

1934

from which

An aspen, 8 ins. diam., bears S.55 $\frac{1}{2}$ °E., 38 lks. dist., mkd. $\frac{1}{4}$ S19 BT.

Chains

A pine, 26 ins. diam., bears N.74°E., 77 lks dist., mkd. $\frac{1}{4}$ S18 BT.

Asc. 60 ft. over W. slope.

46.22 Spur, slopes N.; desc. 45 ft. over NE. slope.

51.25 Drain, course N.; asc. 43 ft. over NW. slope.

55.40 Spur, slopes N.; desc. 87 ft. over NE. slope.

61.90 Creek, 3 lks. wide, 6 ins. deep, course NW.; asc. 123 ft. over SW. slope.

79.95 The cor. of secs. 17, 18, 19 and 20.

Land: rolling.

Soil: adobe, 2nd rate.

Timber: pine, fir, oak and aspen.

Undergrowth: 2nd growth pine and fir, locust, scrub oak.


N.0°03'W., bet. secs. 17 and 18.

Over flat ridge, bears N., through medium pine, fir and oak timber and scattering undergrowth.

8.35 Road, bears NW. and SE.

20.00 Desc. 87 ft. over NW. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



from which

An aspen, 6 ins. diam., bears S.55½°W., 38 lks. dist., mkd. $\frac{1}{4}$ S18 BT.

A pine, 26 ins. diam., bears N.85½°E., 18 lks dist., mkd. $\frac{1}{4}$ S17 BT.


40.50 Drain, course NE.; asc. 27 ft. over SE. slope.

48.20 Over flat ridge, bears NE. and SW.

62.40 Road, bears NE. and SW.

67.50 Desc. 86 ft. over NW. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 7, 8, 17 and 18, with brass cap mkd.



from which

SUBDIVISIONS OF T. 12 N., R. 13 E.

Chains

A pine, 4 ins. diam., bears N.65 $\frac{1}{4}$ °E., 37 lks. dist.,
mkd. $\frac{1}{4}$ S8 BT.

A pine, 5 ins. diam., bears S.77 $\frac{1}{4}$ °E., 47 lks dist.,
mkd. $\frac{1}{4}$ S17 BT.

A pine, 8 ins. diam., bears S.72°W., 54 lks. dist.,
mkd. $\frac{1}{4}$ S18 BT.

A pine, 10 ins diam., bears N.31°W., 57 lks. dist.,
mkd. $\frac{1}{4}$ S7 BT.

Land: rolling.

Soil: adobe, 2nd rate.

Timber: pine, fir, oak and aspen.

Undergrowth: 2nd growth pine and fir, locust, scrub oak.

S.89°52'E., on random line, bet. secs. 8 and 17.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.62 A point 7 lks. S. of cor. of secs. 8, 9, 16 and 17.

Thence

N.89°55'W., on true line, bet. secs. 8 and 17.

Asc. 88 ft. over NE. slope. through moderate pine, fir
and oak timber and scattering undergrowth.

7.89 Flat spur, slopes E.; desc. 92 ft. over SW. slope.

23.81 Change to W. slope; desc. 128 ft.

26.35 Bear Creek, 20 lks. wide, 6 ins. deep, course NW.; asc.
115 ft. over NE. slope.

39.81 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ $\frac{S8}{S17}$

1934

from which

A pine, 5 ins. diam., bears N.27 $\frac{1}{2}$ °E., 33 lks. dist.,
mkd. $\frac{1}{4}$ S8 BT:

A pine, 12 ins. diam., bears S.34°W., 45 lks. dist.,
mkd. $\frac{1}{4}$ S17 BT.

Asc. 66 ft. over NE. slope.

47.12 Short spur, slopes N.; desc. 10 ft. over NW. slope.

48.59 Ravine, course NE.; asc. 74 ft. over E. slope.

55.59 Spur, slopes NE.; desc. 33 ft. over NW. slope.

65.32 Drain, course N.; asc. 30 ft. over E. slope.

74.09 Long spur, slopes N.; thence across spur.

75.29 Road, bears N. and S.

77.10 Desc. 39 ft. over W. slope.

SUBDIVISIONS OF T. 12 N., R. 13 E.

BOOK 4076

Chains

79.62

The cor. of secs. 7, 8, 17 and 18.

Land: rolling.

Soil: adobe, 2nd rate.

Timber: pine, fir, oak and aspen.

Undergrowth: 2nd growth pine and fir, locust, fern.

40.00

N. 89° 57' W., on random line, bet. secs. 7 and 18.

Set temp. $\frac{1}{4}$ sec. cor.

79.82

The cor. of secs. 7, 12, 13 and 18, on W. bdy. of Tp., hereinbefore described.

Thence

S. 89° 57' E., on true line, bet. secs. 7 and 18.

Asc. 95 ft. over rolling NW. slope, through medium pine, fir and oak timber and scattering undergrowth.

13.50

Ridge, bears N. 15° E. and S. 15° W.; desc. 95 ft. over SE. slope.

26.00

N. end of road bears about 10.00 chs. S.

26.15

Drain, course NE.; over N. slope.

29.50

Short rise, slopes N.; desc. 92 ft. over E. slope.

38.71

Change to along S. slope, desc. 25 ft.

39.82

Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, and in a small mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap mkd. $\frac{1}{4}$ $\frac{S7}{S18}$

1934

from which

A pine, 14 ins. diam., bears N. 68 $\frac{1}{2}$ ° E., 47 lks. dist., mkd. $\frac{1}{4}$ S7 BT.A pine, 13 ins. diam., bears S. 30° W., 64 lks. dist., mkd. $\frac{1}{4}$ S18 BT.

Desc. 42 ft. over SE. slope.

42.42

Beaver Creek, 50 lks. wide, 6 ins. deep, course NE. 4 chs., thence NW.; asc. 181 ft. over NW. slope.

49.27

Change to W. slope, asc. 72 ft.

72.50

Short spur, slopes N.; desc. 51 ft. over E. slope.

79.00

Drain, course N.; desc. 5 ft. over W. slope.

79.82

The cor. of secs. 7, 8, 17 and 18.

Land: rolling.

Soil: adobe, 2nd rate.

Timber: pine, fir, oak and aspen.

Undergrowth: 2nd growth pine and fir, locust, scrub oak.

SUBDIVISION OF T. 12 N., R. 13 E.

Chains

N.0°03'W., bet. secs. 7 and 8.


Asc. 40 ft. along rolling W. slope, through medium pine, fir and oak timber and scattering underbrush.

10.23 Road, bears N.25°W. and S.20°E.

12.00 Ridge, bears N.10°W. and S.10°E.; desc. 19 ft. along E. slope.

14.00 Head of ravine, course N. bears about 1 1/2 chs. E.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground, and in mound of stone to top, for sec. cor., with brass cap mkd.



1934

from which

A pine, 4 ins. diam., bears N.60°E., 19 lks dist., mkd. 1/2 S8 BT.

A pine, 5 ins. diam., bears S.81 1/2°W., 45 lks. dist., mkd. 1/2 S7 BT.

41.00 Same ridge, bears N.10°E. and S.10°W., along W. slope.

51.70 Road, bears N.15°E. and S.15°W.

57.10 Same road, bears N.30°W. and S.20°E.


58.00 Same ridge, bears NW. and SE.; desc. 54 ft. over NE. slope.

66.03 Ravine, course E.; asc. 28 ft. over SE. slope.

72.00 Same ridge, bears N.20°E. and S.20°W.

75.28 Same road, bears N.20°E. and S.20°W.; thence along W. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 32 ins. in the ground, for cor. of secs. 5, 6, 7 and 8, with brass cap mkd.



1934

from which

A pine, 6 ins. diam., bears N.21 1/2°E., 39 lks. dist., mkd. T12N R13E S5 BT.

A pine, 11 ins. diam., bears S.18 1/2°E., 45 lks. dist., mkd. T12N R13E S8 BT.

A pine, 8 ins. diam., bears S.53 1/2°W., 24 lks. dist., mkd. T12N R13E S7 BT.

A pine, 6 ins. diam., bears N.34°W., 6 lks. dist., mkd. T12N R13E S6 BT.

Land: rolling.

Soil: adobe, 2nd rate.

Timber: pine, fir, aspen and oak.

Undergrowth: 2nd growth pine and fir, locust.

SUBDIVISIONS OF T. 12 N., R. 13 E.

BOOK 4076

Chains	S.89°55'E., on random line, bet. secs. 5 and 8.
40.00	Set temp. $\frac{1}{2}$ sec. cor.
79.98	A point 2 lks. N. of cor. of secs. 4, 5, 8 and 9. Thence N.89°54'W., on true line, bet. secs. 5 and 8. Desc. 109 ft. over rolling W. slope, through medium pine, fir and oak timber and scattering undergrowth.
6.33	Willow Creek, 10 lks. wide, 10 ins. deep, course NW.; asc. 160 ft. over E. slope.
18.80	Spur, slopes N.20°E.; desc. 49 ft. over NW. slope.
24.52	Drain, course N.; asc. 89 ft. over NE. slope.
39.99	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap mkd.
	$\frac{1}{2}$ S5 S8 1934
	from which
	A pine, 8 ins. diam., bears N.28 $\frac{1}{4}$ °E., 36 lks. dist., mkd. $\frac{1}{2}$ S5 BT.
	A pine, 4 ins. diam., bears S.33 $\frac{1}{4}$ °E., 58 lks. dist., mkd. $\frac{1}{2}$ S8 BT.
	Over NE. slope.
43.57	Change to W. slope,; desc. 220 ft.
59.08	Bear Creek, 30 lks. wide, 8 ins. deep, in stream bed, 80 lks. wide, course NW.; asc. 94 ft. over NE. slope.
62.69	Short spur, slopes N.; desc. 48 ft. over NW. slope.
64.55	Ravine, course NE.; asc. 180 ft. over E. slope.
73.98	Top of ascent, thence over flat ridge bears N. and S.
77.78	Road, bears N. and S. Leave top of ridge, desc. W. slope.
79.98	The cor. of secs. 5, 6, 7 and 8. Land: rolling. Soil: adobe, leaf mold, 2nd rate. Timber: pine, fir, oak and aspen. Undergrowth: 2nd growth pine and fir, locust, fern.

	N.89°57'W., on random line, bet. secs. 6 and 7.
40.00	Set temp. $\frac{1}{2}$ sec. cor.
79.98	Intersect W. bdy. of Tp., 7 lks S. of cor. of secs., 1, 6, 7 and 12, hereinbefore described. Thence S.89°54'E., on true line bet. secs. 6 and 7.

SUBDIVISIONS OF T. 12 N., R. 13 E.

Chains	Desc. 81 ft. over rolling E. slope, through medium pine, and fir timber and scattering undergrowth.
4.70	Drain, course NE.; asc. 45 ft. over NW. slope.
11.03	Spur, slopes NE.; desc. 78 ft. over SE. slope.
17.58	Drain, course N.20°E.; asc. 65 ft. over NW. slope.
23.00	Long spur, slopes N.20°E.; desc. 245 ft. over E. slope.
32.93	Beaver Creek, 40 lks. wide, 6 ins. deep, course NE.; asc. 165 ft. over W. slope.
39.98	Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in the ground, supported in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4}$ S6 $\frac{1}{4}$ S7 1934
	from which
	A pine, 14 ins. diam., bears N.23°E.. 87 lks. dist., mkd. $\frac{1}{4}$ S6 BT.
	A pine, 20 ins. diam., bears S.26 $\frac{1}{2}$ °E., 127 lks. dist., mkd. $\frac{1}{4}$ S7 BT.
	Asc. 40 ft. over W. slope.
47.00	Change to SE. slope,; desc. 25 ft.
50.64	Bottom of desc.; asc. 23 ft. over SW. slope.
60.63	Long spur, slopes NW.; desc. 49 ft. over NE. slope.
67.69	Drain, course NW.; asc. 64 ft. over W. slope.
79.98	The cor. of secs. 5, 6, 7 and 8.
	Land: rolling. Soil: adobe, 2nd rate. Timber: pine, fir, oak and aspen. Undergrowth: 2nd growth pine and fir, locust, fern.
	----- N.0°03'W., bet. secs. 5 and 6.
	Desc. 31 ft. over rolling NW. slope, through medium pine, and fir timber and scattering underbrush.
17.66	Drain, course NW.; asc. 8 ft. over SW. slope.
24.99	Change to NE. slope,; desc. 41 ft.
35.50	Old road, bears NW. and SE.
40.00	Set and iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4}$ S6 S5 1934
	from which

SUBDIVISIONS OF T. 12 N., R. 13 E.

BOOK 4076

Chains

A pine, 24 ins. diam., bears N.35°W., 24 lks. dist., mkd. 1/4 S6 BT.

A pine, 20 ins. diam., bears N.41 1/4°E., 37 lks. dist., mkd. 1/4 S5 BT.

Desc. 23 ft. over NE. slope.


44.99 Drain, course N.20°W.; desc. 17 ft. over W. slope.

48.89 Same drain, course NE.; asc. 10 ft. over SE. slope.

54.89 Change to along E. slope, desc. 32 ft.

73.38 Change to NE. slope, desc. 73 ft.


80.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of lots 1 and 8 of sec. 6, and of lots 4 and 5 of sec. 5, with brass cap mkd.



Desc. 100 ft. over NE. slope.

88.96 Intersect the 3rd Standard Parallel, North. At intersection

Set an iron post, 3 ft. long, 2 ins. diam.; 18 ins. in the ground to bedrock, and in a mound of stone to top, for closing cor., of secs. 5 and 6, with brass cap mkd.



from which

A fir, 8 ins. diam., bears S.33 3/4°E., 20 lks. dist., mkd. T12N R13E S5 CC BT.

A fir, 6 ins. diam., bears S.30 1/2°W., 62 lks. dist., mkd. T12N R13E S6 CC BT.

From point of intersection, the standard cor. of Ts. 13 N., Rs. 12 and 13 E., bears S.89°28'W., 28.52 chs. dist., and the standard 1/4 sec. cor. of sec. 31, bears N.89°28'E., 17.38 chs. dist., both hereinbefore described.

Land, rolling.
Soil, adobe, leaf mold, 2nd rate.
Timber, pine, fir, oak and aspen.
Undergrowth, 2nd growth pine and fir, locust, scrub oak.

TOWNSHIP 12 NORTH, RANGE 13 EAST.

FINAL TEST OF SOLAR ATTACHMENTS.

Sept. 6, 1934, on the meridian described on page 1, at 4h00m p.m., app.t., we set off $34^{\circ}23'$ on the latitude arcs and $6^{\circ}26\frac{1}{2}'$ N. on the declination arcs, and orient the instruments with the solars; the resulting line agrees with the meridian established by Polaris observation.

Sept. 7, 1934, at 8h00m a.m., app.t., with the same latitude settings, we set off $6^{\circ}11'$ N. on the declination arcs, and orient the instruments with the solars; the resulting line agrees within 1' with the meridian established by Polaris observation.

GENERAL DESCRIPTION.

T. 12 N., R. 13 E., is located about 40 miles southerly from the city of Winslow, Ariz., from which a partly-improved road runs southwesterly through the center of the township. It is also reached by branches of the Rim Road, which follows the Mogollon Rim, a few miles south. A road follows the top of each of the four flat ridges which run northerly through the township.

The four ridges have a sea level elevation of about 7500 ft. at the south boundary, descending, usually with wide flat tops, to an elevation of about 6,500 ft. at the north boundary. From the flat ridges the land breaks with increasing slopes, into ravines at the south boundary, which increase in depth as they approach the north boundary. The various channels are Alder Creek and W. Chevelon Creek in the east portion, and in the west part; Willow Creek, Bear Creek, Beaver Creek and Gentry Creek. All have water in pools, intermittent or permanent streams.

Soil is generally of an adobe type lightened with a leaf mold content, of sandstone and limestone formation. It is generally shallow and rocky with only occasional small areas suitable for agriculture.

The township is covered with an excellent growth of yellow pine timber of commercial quality together with less amounts of fir and spruce and in the north part of the township, oak. There is also a small amount of the water varieties of timber in the creek bottoms and other favorable spots. Varieties of undergrowth are locust, scrub oak, vine maple, alder and manzanita, usually sparse in quantity.

Water's Ranger Station is located in the NE. cor. of sec. 2. It comprises a set of buildings, corrals and pastures and is used only during the period of fire hazard. From the station telephone lines extend out of the township easterly and southwesterly. A corral and small pasture, located near the SW. cor. of sec. 25, were the only other improvements observed. They are used by cattle grazers during the summer months. The possibility of deep snow causes the whole areas to be vacated during the winter.

There are two seasonal lakes in the SE. part of the township. Both were dry at the time of the survey.

The township has some possibilities as a recreational area on account of its attractive open timber and delightful summer climate.