

FIELD NOTES

of the Dependent Resurvey of

The E. and W. Bdrs. of T. 5 S., R. 9 W.;

The W. Bdrs. of Ts. 5 S., Rs. 10 and 11 W.;

The E. Bdrs. of Ts. 6 S., Rs. 10, 11 and 12 W.;

The W. Bdy. of T. 6 S., R. 12 W.;

The S. Bdrs. of Ts. 6 S., Rs. 11 and 12 W.;

The W. and S. Bdrs. of Ts. 7 S., Rs. 11 and 12 W.;

and a Portion of the E. Bdy. of T. 7 S., R. 11 W.

Of the Gila and Salt River Meridian,

In the State of Arizona

EXECUTED BY

Anthony C. Kimmell, U. S. Surveyor

and

Daniel M. Wier, U. S. Transitman.

Under special instructions dated February 15, 1934, which provided for the surveys included under Group No. 201, bearing the approval of the Commissioner of the General Land Office under date of April 13, 1934 and assignment instructions dated January 15, 1934.

Survey commenced January 20, 1934

Survey completed March 22, 1934

4079


4079

INDEX DIAGRAM.

Township _____, Range _____

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

BOOK 4079
INDEX DIAGRAM

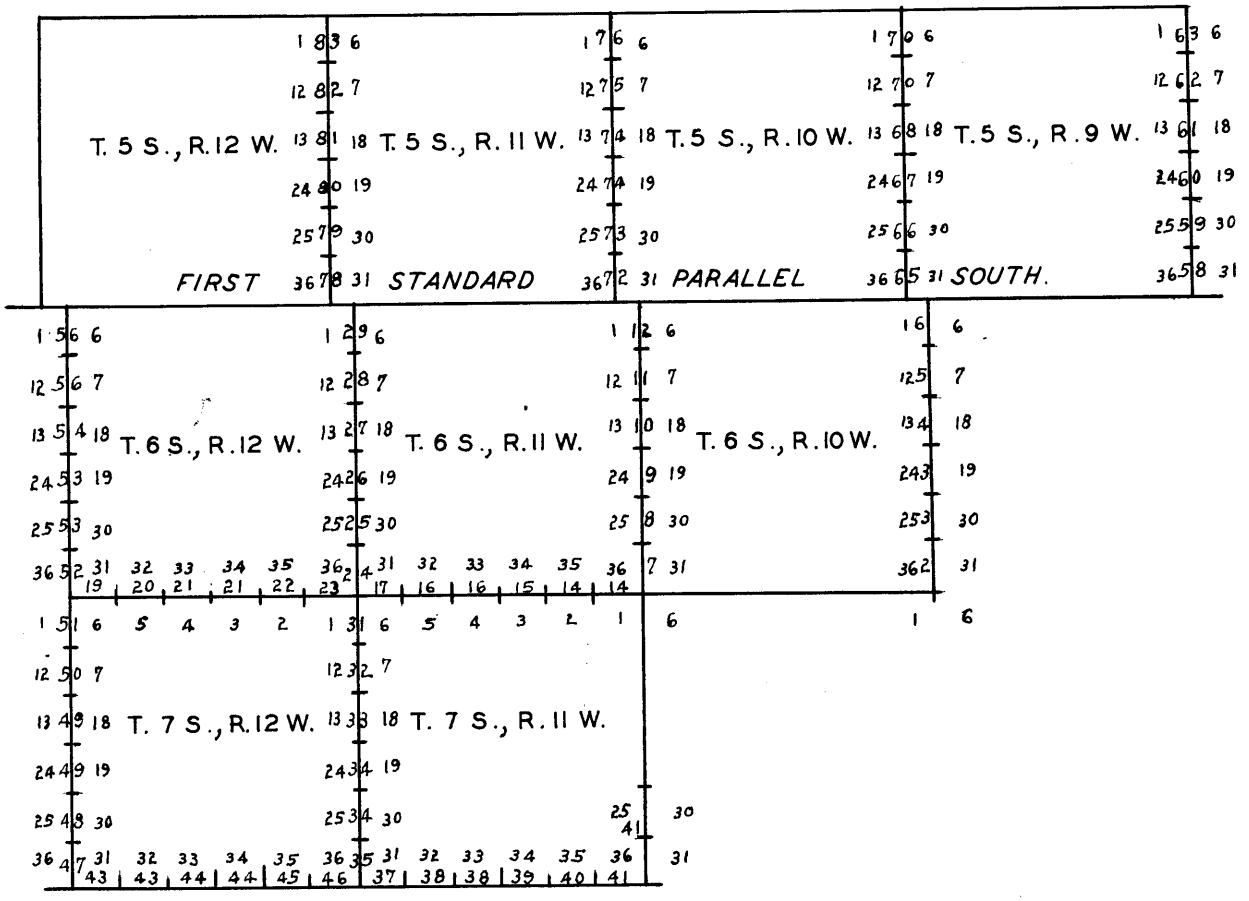

Resurvey of Bdrs. Ts.5, 6 and 7 S., Rs.9, 10, 11 and 12 W.

The resurvey of boundaries necessary to complete the resurvey of Ts.5 S., Rs.9, 10, 11 and 12 W., Ts.6 S., Rs.10, 11 and 12 W., and Ts.7 S., Rs.11 and 12 W., was executed with Buff and Buff transit No. 9987. For description and tests see the field notes of the 1st Stan. Par. S., thru Rs.9, 10, 11 and 12 W., resurveyed under this group.

All measurements were made with 5 ch. steel tapes graduated every link for the first 100 links and thereafter at intervals of 10 links. The tapes were tested by comparison with a standard 1 chain steel tape and found correct. Measurements were made on the slope, the vertical angles determined by clinometers in good adjustment, and all measurements reduced to horizontal which alone appear in the field notes.

As the lines to be reestablished are in a desert country with sparse timber and low undergrowth, and the season of the year precludes extensive use of the solar, the tangent method of survey was selected.

Horizontal deflection angles of 90° are turned to the east or west as required, and as measurements are completed for each corner point proper offsets are measured to the north from the tangent to the parallel, with the temporary corners thus arrived at being on the parallel.

All original corners were reestablished where found, and all other corners established on true lines at proportional distances.

For controlling meridian see field notes of 1st Stan. Par. S., thru Rs.9, 10, 11 and 12 W., resurveyed under this group.

Resurvey of the E. bdy. of T.6 S., R.10 W., superseding the survey by T. F. White in 1877 and resurvey by L. Wolfley in 1892.

Begin at the cor. of Ts.6 and 7 S., Rs.9 and 10 W., in lat. 32°51'12" N., and long. 113°13'45" W.

Thence

North on random line on the E. bdy. of T.6 S., R.10 W.

- | | |
|--------|--|
| 40.08 | A point 2 lks. W. of the $\frac{1}{4}$ sec. cor. of secs. 31 and 36. |
| 80.66 | A point 6 lks. E. of the cor. of secs. 25, 30, 31 and 36. |
| 120.59 | A point 7 lks. E. of the $\frac{1}{4}$ sec. cor. of secs. 25 and 30. |
| 160.78 | A point 4 lks. E. of the cor. of secs. 19, 24, 25 and 30. |
| 200.95 | A point 14 lks. E. of the $\frac{1}{4}$ sec. cor. of secs. 19 and 24. |
| 241.17 | A. point 10 lks. E. of the cor. of secs. 13, 18, 19 and 24. |
| 281.17 | Find no evidence of the $\frac{1}{4}$ sec. cor. of secs. 13 and 18.
Set temp. $\frac{1}{4}$ sec. cor. |
| 321.61 | A point 33 lks. E. of the cor. of secs. 7, 12, 13 and 18. |
| 361.84 | A point 41 lks. E. of the $\frac{1}{4}$ sec. cor. of secs. 7 and 12. |
| 402.07 | A point 48 lks. E. of the cor. of secs. 1, 6, 7 and 12. |

Resurvey of the E. bdy. of T.6 S., R.10 W.

chains

442.07 Find no evidence of the 1/4 sec. cor. bet. secs. 1 and 6. Set temp. cor.

480.59 Intersect the 1st standard parallel S.

481.05 The original closing cor. of secs. 1 and 6, T.6 N., Rs. 9 and 10 W.

Return to the cor. of Ts.6 and 7 S., Rs.9 and 10 W., which is an iron post, 3 ins. diam., supported in a mound of stone, with brass cap mkd. and witnessed as described in the official record.

Thence

N. 0°02' E., on true line on the E. bdy. of sec. 36.


Over nearly level land, thru scattered timber and undergrowth.

12.25 U. S. Highway No. 80, bears E. and W., telephone line on N. side of and paralleling highway, exact distance not recorded.

40.08 The 1/4 sec. cor. which is the point of a stake in old earth mound.

At point of stake,

Set an iron post 3 ft. long, 1 in. diam., 27 ins. in the ground, with cold cream jar deposited alongside, for 1/4 sec. cor. with brass cap mkd.



18x18x12 ins., N. and S. of post, 3 ft. dist. dig pits,


Thence

N. 0°05' W., on true line bet. secs. 31 and 36.

40.58 The cor. of secs. 25, 30, 31 and 36, which is the point of a decayed stake in mound of earth.

At point of stake,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with pint bottle deposited alongside, for cor. of secs. 25, 30, 31 and 36, with brass cap mkd.



1934 raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, nearly level.

Soil, sandy loam, 2d rate.

Timber, scattering pal verde and ironwood; undergrowth, greasewood, sage and cacti.

Resurvey of the E. bdy. of T.6 S., R.10 W.

BOOK 4079

chains

N. 0°01' W., on true line on the E. bdy. of sec. 25.

Over nearly level land, thru scattered timber and undergrowth.

21.27 Telephone line, bears N. 27°05' W. and S. 27°05' E.

39.93 The $\frac{1}{4}$ sec. cor., which is an old stake in a mound of earth.

In place of the old stake, which is reset alongside,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with pint jar deposited alongside, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
$$\begin{array}{c} \frac{1}{4} \\ \text{S } 25 \text{ | S } 30 \end{array}$$

1934

raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Thence

N. 0°02' E., on true line on E. bdy. of sec. 25.

40.19 The cor. of secs. 19, 24, 25 and 30, which is an old stake with faint scribe marks on, in a mound of earth.

In place of the stake, which is reset alongside,

Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground, to solid ledge and supported in a mound of stone to top, for cor. of secs. 19, 24, 25 and 30, with brass cap mkd.

$$\begin{array}{c} \text{T } 6 \text{ S} \\ \text{R } 10 \text{ W } \text{R } 9 \text{ W} \\ \text{S } 24 \text{ | S } 19 \\ \hline \text{S } 25 \text{ | S } 30 \end{array}$$

1934

from which

An original bearing tree

A palo verde, 12 ins. diam., bears N. $18\frac{1}{2}$ ° E., 262 lks. dist. mkd. T 6 S R 9 W S 19 B T.

Land, level.

Soil, sandy loam, 2d rate.

Timber, scattering palo verde and ironwood; undergrowth, greasewood, cacti and sage.

N. 0°08' W., on true line on E. bdy. of sec. 24.

Over level land thru scattered undergrowth and timber.

3.50 Graded road, bears N. 60° W. and S. 60° E.

40.17 The $\frac{1}{4}$ sec. cor., which is an old stake in mound of earth.

In place of the stake, with same reset alongside,

Resurvey of the E. bdy. of T.6 S., R.10 W.

chains

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with deposit of broken glass alongside, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 24 \mid \text{S } 19 \end{array}$$

1934

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. raise a mound

Thence

N. $0^{\circ}03'W.$, on true line on the E. bdy. of sec. 24.

40.22 The point for cor. of secs. 13, 18, 19 and 24, at intersection of lines across old pits.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 13, 18, 19 and 24, with brass cap mkd.

T 6 S

R 10 W R 9 W

$$\begin{array}{c} \text{S } 13 \mid \text{S } 18 \\ \text{S } 24 \mid \text{S } 19 \end{array}$$

1934

from which

A palo verde, 8 ins. diam., bears N. $22^{\circ}E.$, 104 lks. dist. mkd. T 6 S R 9 W S 18 B T.

A palo verde, 14 ins. diam., bears S. $4\frac{3}{4}^{\circ}E.$, 293 lks. dist. mkd. T 6 S R 9 W S 19 B T.

A palo verde 8 ins. diam., bears S. $31^{\circ}W.$, 390 lks. dist. mkd. T 6 S R 10 W S 24 B T.

A palo verde, 12 ins. diam., bears N. $28\frac{3}{4}^{\circ}W.$, 137 lks. dist. mkd. T 6 S R 10 W S 13 B T.

Land, level.

Soil, sandy loam, 2d rate.

Timber, scattering palo verde; undergrowth, greasewood, cacti and sage.

N. $0^{\circ}10'W.$, on true line on E. bdy. of sec. 13.

40.22 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in ground to bed rock and supported in a mound of stone to top for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 13 \mid \text{S } 18 \end{array}$$

1934

80.44 The cor. of secs. 7, 12, 13 and 18, which is a stake in old mound of stone.

In place of the stake, with same reset alongside,

Resurvey of the E. bdy. of T.6 S., R.10 W.

BOOK 4079

chains

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, with brass cap mkd.

T 6 S
R 10 W R 9 W
S 12 | S 7
S 13 | S 18

1934

from which

An original bearing tree

A palo verde, 7 ins. diam., bears N. $20\frac{3}{4}^{\circ}$ E., 155 lks. dist. with original marks showing. Not remarked.

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, level.

Soil, sandy and stony, 3d and 4th rate.

Timber, palo verde and mesquite; undergrowth, greasewood, cacti and sage.

N. $0^{\circ}07'$ W., on true line on E. bdy. of sec. 12.

Over level land, thru scattered timber and undergrowth.

40.23 The point for $\frac{1}{4}$ sec. cor.; bet. original N. and S. pits, outlines visible.

At midpoint bet. old pits.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
S 12 | S 7

1934

from which

A mesquite, 6 ins. diam., bears N. $12\frac{1}{2}^{\circ}$ E., 35 lks. dist. mkd. $\frac{1}{4}$ S 7 B T.

A mesquite, 8 ins. diam., bears N. 26° W., 25 lks. dist. mkd. $\frac{1}{4}$ S 12 B T.

43.20 Road, bears NW. and SE.

80.46 The cor. of secs. 1, 6, 7 and 12, which is an old stake in center of stone mound.

In place of the stake, which is reset alongside,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 1, 6, 7 and 12, with brass cap mkd.

Resurvey of the E. bdy. of T.6 S., R.10 W.

chains

T 6 S
R 10 W R 9 W
S 1 | S 6

S 12 | S 7

1934

raise a mound
of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, level.

Soil, sand and stone, 3d rate.

Timber, palo verde and mesquite; undergrowth, greasewood, cacti and sage.

N. $0^{\circ}39'$ W., on true line on E. bdy. of sec. 1.

Over level land, thru scattered timber and undergrowth.

40.13 Proportional distance.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
S 1 | S 6

1934

from which

A palo verde, 14 ins. diam., bears N. $18\frac{1}{2}^{\circ}$ E., 290 lks. dist. mkd. $\frac{1}{4}$ S 6 B T.A palo verde, 6 ins. diam., bears N. $12\frac{1}{2}^{\circ}$ W., 144 lks. dist. mkd. $\frac{1}{4}$ S 1 B T.

78.52 Intersect the 1st Stan. Par. S.

Set an iron post, 3 ft. long, 3 ins. diam., 3 ins. in the ground to bed rock, and supported in a mound of stone to top, for closing cor. of T.6 S., Rs.9 and 10 W., with brass cap mkd.

T 5 S R 9 W
S 31

S 1 | S 6
R 10 W | R 9 W
C C
T 6 S

1934

raise a mound
of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, S. of cor.

From this cor., the standard $\frac{1}{4}$ sec. cor. of sec. 31, T.5 S., R.9 W., bears S. $88^{\circ}55'$ E., 16.29, chs. dist.; described in the field notes of the 1st Stan. Par. S., resurveyed under this group.Also from this cor., the standard cor. of T.5 S., Rs.9 and 10 W., bears N. $88^{\circ}55'$ W., 23.77 chs. dist.; described in the field notes of the 1st Stan. Par. S., resurveyed under this group.

Resurvey of the E. bdy. of T.6 S., R.10 W.

BOOK 4079

chains

78.98 The original closing cor.; an old unmarked stake in center of mound of stone.

Land, level.

Soil, sand and rock, 3d and 4th rate.

Timber, palo verde and mesquite; undergrowth, greasewood, cacti and sage.

Resurvey of the E. bdy. of T.6 S., R.11 W.,
superseding the survey by T. F. White in 1877.

Begin at the point for the closing cor. of T.6 S., Rs.10 and 11 W., on the 1st Stan. Par. S.,

Thence

South on random line on the E. bdy. of T.6 S., R.11 W.

40.00 Find no evidence of the $\frac{1}{4}$ sec. cor. of secs. 1 and 6.
Set temp. cor.

80.06 A point 49 lks. W. of the cor. of secs. 1, 6, 7 and 12.

120.11 A point 57 lks. W. of the $\frac{1}{4}$ sec. cor. of secs. 7 and 12.

160.21 A point 66 lks. W. of the cor. of secs. 7, 12, 13 and 18.

200.36 A point 70 lks. W. of the $\frac{1}{4}$ sec. cor. of secs. 13 and 18.

240.44 A point 80 lks. W. of the cor. of secs. 13, 18, 19 and 24.

280.44 Find no evidence of the $\frac{1}{4}$ sec. cor. of secs. 19 and 24.
Set temp. cor.

320.44 Find no evidence of the cor. of secs. 19, 24, 25 and 30.
Set temp. cor.

360.44 Find no evidence of the $\frac{1}{4}$ sec. cor. of secs. 25 and 30.
Set temp. cor.

401.15 A point 122 lks. W. of the cor. of secs. 25, 30, 31 and 36.

441.33 A point 128 lks. W. of the $\frac{1}{4}$ sec. cor. of secs. 31 and 36.

481.46 A point 135 lks. W. of the cor. of Ts.6 and 7 S., Rs. 11 and 12 W., which is an iron post, 3 ins. diam., 9 ins. above ground, with brass cap mkd. and witnessed as described in the official record.

Thence

N. $0^{\circ}06'$ W., on true line on E. bdy. of sec. 36.

Over nearly level land, thru scattered timber and undergrowth.

19.87 A frame cabin bears S. $55\frac{3}{4}^{\circ}$ E.

23.97 A frame cabin bears S. $30^{\circ}23'$ E.

40.13 The $\frac{1}{4}$ sec. cor. of secs. 31 and 36, which is an old weather worn stake in mound of earth.

In place of the stake, which is reset alongside.

Resurvey of the E. bdy. of T.6 S., R.11 W.

chains

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with deposit of broken glass alongside, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ S\ 36\ | \ S\ 31 \\ 1934 \end{array}$$

18x18x12 ins., N. and S. of the post, 3 ft. dist. dig pits,

Thence

N. $0^{\circ}05'$ W., on true line on E. bdy. of sec. 36.

40.18 The cor. of secs. 25, 30, 31 and 36, which is the point of a decayed stake in ground in mound of earth.

At point of stake,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with deposit of broken glass alongside, for the cor. of secs. 25, 30, 31 and 36, with brass cap mkd.

$$\begin{array}{c} T\ 6\ S \\ R\ 11\ W\ | \ R\ 10\ W \\ \hline S\ 25\ | \ S\ 30 \\ S\ 36\ | \ S\ 31 \\ 1934 \end{array}$$

18x18x12 ins., in each sec., 3 ft. dist. dig pits,

Land, level.

Soil, sandy loam, 2d rate.

Timber, palo verde, ironwood and mesquite; undergrowth, greasewood, cacti and sage.

N. $0^{\circ}09'$ W., on true line on E. bdy. of sec. 25.

Over nearly level land, thru scattered timber and dense undergrowth.

40.18 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with deposit of broken glass alongside, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ S\ 25\ | \ S\ 30 \\ 1934 \end{array}$$

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. raise a mound

50.39 The chimney on a frame house bears N. $40^{\circ}15'$ E.

80.36 Proportional distance.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with deposit of broken glass alongside, for cor. of secs. 19, 24, 25 and 30, with brass cap mkd.

Resurvey of the E. bdy. of T.6 S., R.11 W.

BOOK 4079

chains

T 6 S	
R 11 W	R 10 W
S 24	S 19
S 25	S 30

1934

raise a mound
of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, level.

Soil, sandy loam, 2d rate.

Timber, palo verde, ironwood and mesquite; undergrowth, greasewood, cacti and sage.

N. $0^{\circ}09'$ W.; on true line on E. bdy. of sec. 24.

Over nearly level land, thru scattered timber and dense undergrowth.

.40 The chimney on frame house bears S. $77^{\circ}45'$ E.40.18 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$	
S 24	S 19

1934

raise a mound
of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

47.10 The chimney on the house bears S. $18^{\circ}15'$ E.

80.35 The cor. of secs. 13, 18, 19 and 24, which is an old mound of earth.

In old mound of earth,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with deposit of broken glass alongside, for cor. of secs. 13, 18, 19 and 24, with brass cap mkd.

T 6 S	
R 11 W	R 10 W
S 13	S 18
S 24	S 19

1934

from which

The original bearing trees

A palo verde stump, bears N. 19° E., 42 lks. dist.A palo verde tree, 10 ins. diam., bears S. 56° W., 46 lks. dist.Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.From this cor., a corner on the bdy. line bet. Yuma and Maricopa counties bears N. $89^{\circ}42'$ E., 584 lks. dist.; an iron post 3 ins. diam., 2 ft. above ground, and in a mound of stone, with brass cap mkd.

Resurvey of the E. bdy. of T.6 S., R.11 W.

chains

YUMA
COUNTY
1918
MARICOPA
COUNTY

Land, level.
Soil, sandy loam and gravel, 2d and 3d rate.
Timber, palo verde and ironwood; undergrowth, greasewood,
cacti and sage.

N. 0°09' W., on true line on E. bdy. of sec. 13.

Over nearly level land, thru scattered timber and under-
growth.

40.08 The point for $\frac{1}{4}$ sec. cor., determined from original bear-
ing trees.

At this point,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the
ground with a $\frac{1}{2}$ pint milk bottle deposited alongside, for
 $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
S 13 | S 18
1934

from which

The original bearing trees

A palo verde stump, bears N. 2° E., 267 lks. dist.

A palo verde stump hole, bears N. 46 $\frac{1}{4}$ ° W., 224 lks.
dist.

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W.
of cor.

Thence

N. 0°03' W., on true line on E. bdy. of sec. 13.

40.15 The cor. of secs. 7, 12, 13 and 18, which is the decayed
point of a stake in mound of earth.

At point of stake,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the
ground with bottle deposited alongside, for cor. of secs.
7, 12, 13 and 18, with brass cap mkd.

T 6 S
R 11 W | R 10 W
S 12 | S 7

S 13 | S 18
1934

from which

The original bearing trees

An old palo verde stump, bears S. 49 $\frac{3}{4}$ ° E., 132 lks.
dist.

An old palo verde stump hole, bears N. 38° W., 237
lks. dist.

Raise a mound of stone, 2 ft base, 1 $\frac{1}{2}$ ft. high, W. of
cor.

Resurvey of the E. bdy. of T.6 S., R.11 W.

BOOK 4079

chains

Land, level.
Soil, sandy loam and stony, 2d and 3d rate.
Timber, palo verde and ironwood, undergrowth, greasewood,
cacti and sage.

N. 0°08' W., on true line on E. bdy. of sec. 12.

Over level land, thru scattered timber and undergrowth.

40.10 The $\frac{1}{4}$ sec. cor., which is an old stake in center of mound
of stone.

In place of the old stake, with same reset alongside,

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the
ground to bed rock, with small stone mkd. x deposited at
base of post, and supported in a mound of stone to top,
for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ S\ 12\ | \ S\ 7 \\ 1934 \end{array}$$

No accessories.

Thence

N. 0°07' W., on true line on E. bdy. of sec. 12.

13.25 A dry wash, 50 lks. wide, 8 ft. deep, course NW.

27.35 A dry wash, 40 lks. wide, 7 ft. deep, course SW.

40.05 The cor. of secs. 1, 6, 7 and 12, which is an old mound
of earth.

At center of mound,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in
the ground, for cor. of secs. 1, 6, 7 and 12, with brass
cap mkd.

$$\begin{array}{c} T\ 6\ S \\ R\ 11\ W\ | \ R\ 10\ W \\ S\ 1\ | \ S\ 6 \\ \hline S\ 12\ | \ S\ 7 \\ 1934 \end{array}$$

from which

An ironwood, 9 ins. diam., bears N. 55° E., 94 lks.
dist., mkd. T 6 S R 10 W S 6 B T.

An ironwood, 13 ins. diam., bears S. 61° E., 111 lks.
dist., mkd. T 6 S R 10 W S 7 B T.

An ironwood, 10 ins. diam., bears N. 86° W., 293 lks.
dist., mkd. T 6 S R 11 W S 1 B T.

No tree available in sec. 12.

There is an outline of the original pits to the NE.
and SE.

Resurvey of the E. bdy. of T.6 S., R.11 W.

chains

Land, nearly level.
Soil, sandy loam and stony, 2d and 3 d rate.
Timber, palo verde and ironwood; undergrowth, greasewood and cacti.

N. 0°21' W., on true line on E. bdy. of sec. 1.

Over level land, thru scattered timber and dense undergrowth.

- 15.00 A dry wash, 75 lks. wide, course SW.
31.25 Descend 75 ft. over rim.
35.00 Enter river bottom, bears NW. and SE., at old drainage canal, course nearly W.
35.75 A point 1.50 chs. E. of an adobe house.
37.15 Road to house, bears E. and W.
39.02 A point 34 lks. E. of fence cor. of fences bearing N., S. and W.
40.03 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
S 1 | S 6
1934

from which

A mesquite, 6 ins. diam., bears N. 60° E., 32 lks. dist., mkd. $\frac{1}{4}$ S 6 B T.

A mesquite, 7 ins. diam., bears N. 74° W., 33 lks. dist., mkd. $\frac{1}{4}$ S 1 B T.

- 59.97 A point 18 lks. E. of a cor. of fences, bearing N., S. and W.
60.10 A road, bears E. and W.
65.35 An old fence, bears S. 1 $\frac{3}{4}$ ° W. and N. 1 $\frac{3}{4}$ ° E.
74.40 An old road, bears E. and W.
80.06 Intersect the 1st Stan. Par. S., ^{at a point} determined by proportion bet. the stan. cor. of T.5 S., Rs.10 and 11 W., and the stan. $\frac{1}{4}$ sec. cor. of sec. 31, T.5 S., R.10 W.
Set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in the ground with deposit of broken glass at base of post, for closing cor. of secs. 1 and 6, T:6 S., Rs.10 and 11 W., with brass cap mkd.

T 5 S R 10 W

. S 31

S 1 | S 6

R 11 W | R 10 W

C C

T 6 S

1934

Resurvey of the E. bdy. of T.6 S., R.11 W.

BOOK 4079

chains

from which

A cottonwood, 24 ins. diam., bears S. $29\frac{1}{2}^{\circ}$ E., 170 lks. dist. mkd. T 6 S R 10 W S 6 C C B T.

A cottonwood, 28 ins. diam., bears S. $24\frac{3}{4}^{\circ}$ W., 182 lks. dist., mkd. T 6 S R 11 W S 1 C C B T.

From this cor., the standard cor. of T.5 S., Rs.10 and 11 W., bears N. $89^{\circ}54'$ W., 22.99 chs. dist.; described in the field notes of the 1st Stan. Par. S., thru Rs.9, 10, 11 and 12 W., resurveyed under this group.

Also from the closing corner,

The standard $\frac{1}{4}$ sec. cor. of sec. 31, bears S. $89^{\circ}54'$ E., 17.00 chs. dist.; also described in the field notes of the 1st Stan. Par. S., thru Rs.9, 10, 11 and 12 W., resurveyed under this group.

Land, river bottom and upland.
Soil, sandy clay loam, 2d rate.
Timber, cottonwood, willow and ironwood; undergrowth, arrow weed and tumble weed.

Resurvey of the S. bdy. of T.6 S., R.11 W.,
superseding the survey by T. F. White in 1877.

From the cor. of Ts.6 and 7 S., Rs.10 and 11 W., hereinbefore described.

West on a tangent and random along the S. bdy. of T.6 S., R.11 W., searching for evidence of the original survey and offsetting from the tangent to the parallel at all corners when found and setting temp. corners on the parallel where corners could not be found, the fallings being noted from the true parallel.

- 41.49 A point 1.38 chs. S. of the $\frac{1}{4}$ sec. cor. of secs. 1 and 36.
80.36 A point .40 chs. N. of the cor. of secs. 1, 2, 35 and 36.
120.36 Find no evidence of the $\frac{1}{4}$ sec. cor. of secs. 2 and 35.
Set temp. cor.
160.57 A point 66 lks. N. of the cor. of secs. 2, 3, 34 and 35.
200.62 A point 90 lks. N. of the $\frac{1}{4}$ sec. cor. of secs. 3 and 34.
240.82 A point 106 lks. N. of the cor. of secs. 3, 4, 33 and 34.
280.92 A point 135 lks. N. of the $\frac{1}{4}$ sec. cor. of secs. 4 and 33.
320.82 A point 149 lks. N. of the cor. of secs. 2, 3, 34 and 35.
360.82 Find no evidence of the $\frac{1}{4}$ sec. cor. of 2 and 35.
Set temp. cor.
401.32 A point 200 lks. N. of the cor. of secs. 5, 6, 31 and 32.
439.65 A point 165 lks. N. of the $\frac{1}{4}$ sec. cor.
479.58 A point 217 lks. N. of the cor. of Ts.6 and 7 S., Rs.11 and 12 W.

Resurvey of the S. bdy. of T.6 S., R.11 W.

chains

Return to the cor. of Ts.6 and 7 S., Rs.10 and 11 W.

Thence,

N. 88°02' W., on true line on S. bdy. of sec. 36.

41.51 The $\frac{1}{4}$ sec. cor., of secs. 1 and 36, which is an old stake, 14 ins. above ground, with faint, but illegible scribe marks.

In place of the stake, with same reset alongside.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 36

S 1

1934

18x18x12 ins., E. and W. of post, 3 ft. dist.

dig pits,

Thence

S. 87°27' W., on true line on S. bdy. of sec. 36.

38.89 The cor. of secs. 1, 2, 35 and 36, which is a stake 4 ins. sq., 28 ins. above ground, bearing faint scribe marks.

In place of the stake, with same reset alongside.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with deposit of broken glass alongside, for cor. of secs. 1, 2, 35 and 36, with brass cap mkd.

T 6 S R 11 W

S 35 | S 36

S 2 | S 1

T 7 S

1934

18x18x12 ins., in each sec., 3 ft. dist.

dig pits,

Land, level.

Soil, sandy loam, 2d rate.

Timber, very scattering mesquite; undergrowth, greasewood, cacti and sage.

S. 89°49' W., on true line on S. bdy. of sec. 35.

Over nearly level land, thru scattered undergrowth.

40.10 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with deposit of broken glass alongside, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 35

S 2

1934

18x18x12 ins., E. and W. of post, 3 ft. dist.

dig pits,

Resurvey of the S. bdy. of T.6 S., R.11 W.

BOOK 4079

BOOK 4079

chains

80.21 The cor. of secs. 2, 3, 34 and 35, which is a stake, 4 ins. diam., 3 ft. above ground, with faint outlines of scribe marks.

In place of the stake, with same reset alongside.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with deposit of broken glass at base, for cor. of secs. 2, 3, 34 and 35, with brass cap mkd.

T 6 S R 11 W

S 34 | S 35

S 3 | S 2

T 7 S

1934

18x18x12 ins., in each sec., 3 ft. dist.

dig pits,

Land, level.

Soil, sandy loam, 2d rate.

Timber, none; undergrowth, greasewood, cacti and sage.

S. 89°39' W., on true line on S. bdy. of sec. 34.

Over rolling land, thru scattered undergrowth.

40.05 The $\frac{1}{4}$ sec. cor., which is an old decayed stake in the ground.

In place of the stake,

Set an iron post 3 ft. long, 1 in. diam., 27 ins. in the ground with deposit of broken glass alongside, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 34

$\frac{1}{4}$ |

S 3

1934

18x18x12 ins., E. and W. of post, 3 ft. dist.

dig pits,

Thence

S. 89°46' W., on true line on S. bdy. of sec. 34.

40.20 The cor. of secs. 3, 4, 33 and 34, which is an old stake, 4 ins. diam., bearing faint outlines of scribe marks.

In place of the stake, with same reset alongside.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with broken glass deposited alongside, for cor. of secs. 3, 4, 33 and 34, with brass cap mkd.

T 6 S R 11 W

S 33 | S 34

S 4 | S 3

T 7 S

1934

dig pits,

Resurvey of the S. bdy. of T.6 S., R.11 W.

chains

18x18x12 ins., in each sec., 3 ft. dist.

Land, rolling sand hills.

Soil, sandy, 3d rate.

Timber, scattered mesquite; undergrowth, mesquite, greasewood and cacti.

S. 89°35' W., on true line on S. bdy. of sec. 33.

Over nearly level land, thru scattered undergrowth.

39.20 Road, bears N. and S.

40.10 The $\frac{1}{4}$ sec. cor.; a decayed point of stake in an old earth mound.

At point of the stake,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with deposit of broken glass alongside, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 33

$\frac{1}{4}$

S 4

1934

18x18x12 ins., E. and W. of post, 3 ft. dist.

dig pits,

Thence

S. 89°48' W., on true line on S. bdy. of sec. 33.

39.90 The cor. of secs. 4, 5, 32 and 33; a point of decayed stake in mound of earth.

At point of the stake,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with deposit of broken glass alongside, for cor. of secs. 4, 5, 32 and 33, with brass cap mkd.

T 6 S R 11 W.

S 32 | S 33

S 5 | S 4

T 7 S

1934

18x18x12 ins., in each sec., 3 ft. dist.

dig pits,

Land, level.

Soil, sandy, 2d and 3d rate.

Timber, none; undergrowth, greasewood, cacti and sage.

S. 89°38' W., on true line on S. bdy. of sec. 32.

Over level land, thru scattered undergrowth.

34.05 Road, bears N. and S.

40.25 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with deposit of broken glass alongside, for $\frac{1}{4}$ sec.

Resurvey of the S. bdy. of T.6 S., R.11 W.

BOOK 4079

chains

cor., with brass cap mkd.

$$\frac{1}{4} \frac{S \ 32}{\quad}$$

S 5

1934

18x18x12 ins., E. and W. of post, 3 ft. dist.

dig pits,

80.50 The cor. of secs. 5, 6, 31 and 32, which is a stake, 4 ins. diam., 30 ins. above ground, in mound of earth.

In place of the post, reset alongside,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with broken glass deposited alongside, for cor. of secs. 5, 6, 31 and 32, with brass cap mkd.

T 6 S R 11 W

S 31	S 32
------	------

S 6	S 5
-----	-----

T. 7 S

1934

18x18x12 ins., in each sec., 3 ft. dist.

dig pits,

Land, level.

Soil, sand and coarse gravel, 3d rate.

Timber, scattered palo verde; undergrowth, greasewood, cacti and sage.

N. 89°30' W., on true line on S. bdy. of sec. 31.

Over nearly level land, thru scattered undergrowth.

38.33 The $\frac{1}{4}$ sec. cor., which is a stake 3 ins. diam., 40 ins. above ground in mound of earth.

In place of the stake, reset alongside,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with deposit of broken glass alongside, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
$$\frac{1}{4} \frac{S \ 31}{\quad}$$

S 6

1934

18x18x12 ins., E. and W. of post, 3 ft. dist.

dig pits,

Thence

S. 89°15' W., on true line on S. bdy. of sec. 31.

4.60 Road, bears NE. and SW.

9.20 Road, bears N. 30° E. and S. 30° W.

39.93 The cor. of Ts.6 and 7 S., Rs.11 and 12 W., which is a stake, 4 $\frac{1}{2}$ ins. diam., 36 ins. above ground in mound of earth.

In place of the stake, reset alongside,

Resurvey of the S. bdy. of T.6 S., R.11 W.

chains

Set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in the ground, for cor. of Ts.6 and 7 S., Rs.11 and 12 W., with brass cap mkd.

T 6 S
R 12 W R 11 W

S 36 | S 31

S 1 | S 6

T 7 S

1934

18x18x12 ins., N., S., E. and W. of the post, 3 ft. dist. ^{dig pits,}

Land, level.

Soil, sand and gravel, 3d rate.

Timber, scattered palo verde; undergrowth, greasewood, cacti and sage.

Resurvey of the S. bdy. of T.6 S., R.12 W.,
superseding the survey by T. F. White in 1877.

From the cor. of Ts.6 and 7 S., Rs.11 and 12 W.

West on a tangent and random line along the S. bdy. of T.6 S., R.12 W., searching for evidence of the original survey and offsetting from the tangent to the parallel at all corners when found, and setting temp. corners on the parallel where corners were missing, all fallings noted are from the true parallel points.

- 40.71 A point 0.41 chs. N. of the $\frac{1}{4}$ sec. cor. of secs. 1 and 36.
- 80.79 A point 0.55 chs. N. of the cor. of secs. 1, 2, 35 and 36.
- 120.86 A point 0.73 chs. N. of the $\frac{1}{4}$ sec. cor. of secs. 2 and 35.
- 160.86 Find no evidence of the cor. of secs. 2, 3, 34 and 35.
Set temp. cor.
- 200.86 Find no evidence of the $\frac{1}{4}$ sec. cor. of secs. 3 and 34.
Set temp. cor.
- 240.86 Find no evidence of the cor. of secs. 3, 4, 33 and 34.
Set temp. cor.
- 281.24 A point 26 lks. N. of the $\frac{1}{4}$ sec. cor. of secs. 4 and 33.
- 321.38 A point 29 lks. N. of the cor. of secs. 4, 5, 32 and 33.
- 361.38 Find no evidence of the $\frac{1}{4}$ sec. cor. of secs. 5 and 32.
Set temp. cor.
- 401.13 A point 68 lks. N. of the cor. of secs. 5, 6, 31 and 32.
- 440.13 Find no evidence of the $\frac{1}{4}$ sec. cor. of secs. 6 and 31.
Set temp. cor.
- 479.31 A point 28 lks. N. of the cor. of Ts.6 and 7 S., Rs.12 and 13 W., which is a mesquite stake, 4 ins. diam., 16 ins. above ground with faint scribe marks, in a mound of earth.

In place of the stake, reset alongside,

Resurvey of the S. bdy. of T.6 S., R.12 W.

BOOK 4079

chains

Set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in the ground, for cor. of Ts.6 and 7 S., Rs.12 and 13 W., with brass cap mkd.

$$\begin{array}{r} T 6 S \\ R 13 W R 12 W \\ S 36 | S 31 \\ \hline S 1 | S 6 \end{array}$$

T 7 S

1934

of stone, 2 ft. base, 1½ ft. high, S. of cor. raise a mound

Thence

S. 89°43' E., on true line on S. bdy. of sec. 31.

Over rolling land, thru scattered undergrowth.

- 2.95 Road, bears N. and S.
 16.30 Dry wash, 3.50 chs. wide, 12 ft. deep, course N.
 30.25 Descend 30 ft. to valley.
 31.15 Enter level valley, bears nearly N. and S.
 38.24 At proportional distance.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with beer bottle deposited alongside, for ¼ sec. cor., with brass cap mkd.

$$\begin{array}{r} S 31 \\ \frac{1}{4} \\ \hline S 6 \\ 1934 \end{array}$$

from which

A mesquite, 7 ins. diam., bears N. 54¾° W., 267 lks. dist., mkd. ¼ S 31 B T.

No other tree available.

- 61.20 Old road, bears N. and S.
 78.18 The cor. of secs. 5, 6, 31 and 32, which is a mesquite stake, 4 ins. sq., 16 ins. above ground in mound of earth.
 In place of the stake, reset alongside,
 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with beer bottle deposited alongside, for cor. of secs. 5, 6, 31 and 32, with brass cap mkd.

$$\begin{array}{r} T 6 S R 12 W \\ S 31 | S 32 \\ \hline S 6 | S 5 \end{array}$$

T 7 S

1934

from which

Resurvey of the S. bdy. of T.6 S., R.12 W.

chains

A mesquite, 6 ins. diam., bears N. 7° E., 228 lks. dist., mkd. T 6 S R 12 W S 32 B T.

A mesquite, 8 ins. diam., bears S. $29\frac{1}{2}^{\circ}$ E., 177 lks. dist., mkd. T 7 S R 12 W S 5 B T.

A mesquite, 6 ins. diam., bears S. 19° W., 166 lks. dist., mkd. T 7 S R 12 W S 6 B T.

A mesquite, 10 ins. diam., bears N. $19\frac{1}{4}^{\circ}$ W., 238 lks. dist., mkd. T 6 S R 12 W S 31 B T.

Land, rolling and level.

Soil, sand and gravel on upland; sandy loam and bottom, 2d and 3d rate.

Timber, scattered palo verde; undergrowth, sage and grease-wood.

N. $89^{\circ}42'$ E., on true line on S. bdy. of sec. 32.

Over nearly level land, thru scattered timber and dense undergrowth.

22.00 Dry channel of wash, 60 lks. wide, course N.

23.00 Leave valley, enter desert upland.

39.87 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with glass insulator deposited alongside, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\begin{array}{r} \frac{1}{4} \text{ S } 32 \\ \hline \text{S } 5 \end{array}$$

1934

from which

A palo verde, 6 ins. diam., bears S. $8\frac{3}{4}^{\circ}$ E., 124 lks. dist., mkd. $\frac{1}{4}$ S 5 B T.

No other tree available, no stone within a reasonable distance and pits impracticable.

55.00 A dry wash, 160 lks. wide, course N.

79.75 The cor. of secs. 4, 5, 32 and 33, which is a mesquite stake, 3 ins. diam., 18 ins. above ground in mound of earth.

In place of the stake, reset alongside,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with deposit of a beer bottle alongside, for cor. of secs. 4, 5, 32 and 33, with brass cap mkd.

T 6 S R 12 W

$$\begin{array}{r} \text{S } 32 \text{ | } \text{S } 33 \\ \hline \text{S } 5 \text{ | } \text{S } 4 \end{array}$$

T 7 S

1934

18x18x12 ins., in each sec., 3 ft. dist.

dig pits,

Resurvey of the S. bdy. of T.6 S., R.12 W.

BOOK 4070

chains

Land, level and rolling sand hills.
Soil, on bottom, sand loam, 2d rate; on upland sand with some gravel, 3d rate.
Timber, palo verde; undergrowth, greasewood and sage.

N. 89°58' E., on true line on S. bdy. of sec. 33.

Over nearly level land, thru scattered undergrowth.

40.14 The $\frac{1}{4}$ sec. cor., which is a mesquite stake, 3 ins. diam., 36 ins. above ground.

In place of the old stake, reset alongside,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\begin{array}{r} S\ 33 \\ \frac{1}{4} \\ \hline S\ 4 \\ 1934 \end{array}$$

18x18x12 ins., E. and W. of post, 3 ft. dist. dig pits,

Thence

S. 89°50' E., on true line on S. bdy. of sec. 33.

40.10 At proportional distance.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins., in the ground with beer bottle deposited alongside, for cor. of secs. 3, 4, 33 and 34, with brass cap mkd.

$$\begin{array}{r} T\ 6\ S\ R\ 14\ W \\ S\ 33\ | S\ 34 \\ \hline S\ 4\ | S\ 3 \\ T\ 7\ S \\ 1934 \end{array}$$

18x18x12 ins., in each sec., 3 ft. dist. dig pits,

Land, rolling.

Soil, sandy, 2d rate.

Timber, none; undergrowth, greasewood and sage.

S. 89°50' E., on true line on S. bdy. of sec. 34.

Over rolling land, thru scattered undergrowth.

40.10 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with pint bottle deposited alongside, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\begin{array}{r} S\ 34 \\ \frac{1}{4} \\ \hline S\ 3 \\ 1934 \end{array}$$

18x18x12 ins., E. and W. of post, 3 ft. dist. dig pits,

Resurvey of the S. bdy. of T.6 S., R.12 W.

chains

80.19 At proportional distance.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground for cor. of secs. 2, 3, 34 and 35, with brass cap mkd.

T 6 S R 12 W

S 34 | S 35

S 3 | S 2

T 7 S

1934

18x18x12 ins., in each sec., 3 ft. dist.

dig pits,

Land, rolling.

Soil, sandy, 2d and 3d rate.

Timber, scattered palo verde; undergrowth, greasewood and sage.

S. 89°50' E., on true line on S. bdy. of sec. 35.

Over rolling land, thru scattered undergrowth.

34.00 Dry wash, 75 lks. wide, 5 ft. deep, course N.

39.75 An old deserted cabin, bears N. about 5½ chs. dist.

40.09 The ¼ sec. cor. which is an old stake, 4 ins. sq., 40 ins. above ground in a mound of stone.

In place of the old stake, reset alongside,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor., with brass cap mkd.

¼ S 35
S 2

1934

of stone, 2 ft. base, 1½ ft. high, N. of cor. raise a mound

Thence

N. 89°45' E., on true line on S. bdy. of sec. 35.

3.65 A graded road, bears N. to Palomar and S. to Aztec.

30.00 Dry wash, 20 lks. wide, 4 ft. deep; course NW.

40.07 The cor. of secs. 1, 2, 35 and 36; the point of a decayed stake in mound of earth.

At point of stake.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with deposit of pint bottle alongside, for cor. of secs. 1, 2, 35 and 36, with brass cap mkd.

Resurvey of the S. bdy. of T.6 S., R.12 W.

BOOK 4079

chains

T 6 S R 12 W

S 35 | S 36

S 2 | S 1

T 7 S

1934

from which

The original bearing trees

A palo verde, bears S. 20° W., 276 lks., bears traces of scribe marks.

A palo verde, 10 ins. diam., bears S. $41\frac{1}{2}^{\circ}$ W., 284 lks. dist., with traces of original scribe marks. I. remark T 7 S R 12 W S 2 B T.

A palo verde, 9 ins. diam., bears N. 65° W., 154 lks. dist., with traces of original scribe marks. I. remark T 6 S R 12 W S 35 B T.

A mesquite, bears N. $7\frac{1}{2}^{\circ}$ W., 94 lks. dist., with faint scribe marks remaining.

And new bearing tree

A palo verde, 8 ins. diam., bears S. $76\frac{1}{4}^{\circ}$ E., 118 lks. dist., mkd. T 7 S R 12 W S 1 B T.

No tree available in sec. 36.

Land, rolling.

Soil, sandy, 2d rate.

Timber, mesquite; undergrowth, greasewood, catclaw and sage.

N. $89^{\circ}48'$ E., on true line on S. bdy. of sec. 36.

Over nearly level land, thru scattered undergrowth.

40.07 The $\frac{1}{4}$ sec. cor.; point of decayed stake in mound of earth.

At point of the stake,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with pint beer bottle deposited alongside, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

 $\frac{1}{4}$ S 36

S 1

1934

from which

An ironwood, 9 ins. diam., bears N. $42\frac{3}{4}^{\circ}$ W., 129 lks. dist., mkd. $\frac{1}{4}$ S 36 B T.

No other accessory.

Thence

N. $89^{\circ}25'$ E., on true line on S. bdy. of sec. 36.

40.72 The cor. of Ts.6 and 7 S., Rs.11 and 12 W., hereinbefore described.

Resurvey of the S. bdy. of T.6 S., R.12 W.

chains

Land, level.
Soil, sandy loam and gravel, 2d and 3d rate.
Timber, palo verde and ironwood; undergrowth, greasewood and sage.

Resurvey of the E. bdy. of T.6 S., R.12 W.,
superseding the survey by T. F. White in 1877.

From the cor. of Ts.6 and 7 S., Rs.11 and 12 W.

North, on random line along the E. bdy. of T.6 S., R.12 W.

- 40.15 A point 24 lks. E. of the $\frac{1}{4}$ sec. cor. of secs. 31 and 36.
80.34 A point 44 lks. E. of the cor. of secs. 25, 30, 31 and 36.
120.50 A point 65 lks. E. of the $\frac{1}{4}$ sec. cor. of secs. 25 and 30.
160.63 A point 84 lks. E. of the cor. of secs. 19, 24, 25 and 30.
200.69 A point 107 lks. E. of the $\frac{1}{4}$ sec. cor. of secs. 19 and 24.
240.91 A point 122 lks. E. of the cor. of secs. 13, 18, 19 and 24.
280.89 A point 132 lks. E. of the $\frac{1}{4}$ sec. cor. of secs. 13 and 18.
295.93 Find no trace of the meander cor. on S. bank of the Gila River.
Set temp. cor.
311.12 Find no trace of the meander cor. on N. bank of the Gila River.
Set temp. cor.
321.29 Find no evidence of the cor. of secs. 7, 12, 13 and 18.
Set temp. cor.
361.29 Find no evidence of the $\frac{1}{4}$ sec. cor. of secs. 7 and 12.
Set temp. cor.
401.29 Find no evidence of the cor. of secs. 1, 6, 7 and 12.
Set temp. cor.
442.49 A point 212 lks. E. of the $\frac{1}{4}$ sec. cor. of secs. 1 and 6.
483.72 A point 214 lks. E. of the original closing cor. of Ts.6 S., R.11 and 12 W.

Return to the cor. of Ts.6 and 7 S., Rs.11 and 12 W.

Thence

N. $0^{\circ}21'$ W., on true line on E. bdy. of sec. 36.

Over nearly level land, thru scattered undergrowth.

- 40.15 The $\frac{1}{4}$ sec. cor.; the decayed point of a stake in mound of earth.

At point of the stake,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the

Resurvey of the E. bdy. of T.6 S., R.12 W.

Book 4070

chains

ground with deposit of broken glass at base of post, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
S 36 | S 31
1934

18x18x12 ins., N. and S. of post, 3 ft. dist. dig pits,

Thence

N. 0°17' W., on true line on E. bdy. of sec. 36.

40.19 The cor. of secs. 25, 30, 31 and 36; the point of a decayed stake in mound of earth.

In place of the stake,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with quart bottle deposited alongside, for cor. of secs. 25, 30, 31 and 36, with brass cap mkd.

T 6 S
R 12 W | R 11 W
S 25 | S 30

S 36 | S 31
1934

18x18x12 ins., in each sec., 3 ft. dist. dig pits,

Land, level.

Soil, sandy loam, 2d rate.

Timber, scattered palo verde and ironwood; undergrowth, greasewood, sage and cacti.

N. 0°18' W., on true line on E. bdy. of sec. 25.

Over nearly level land, thru scattered timber and undergrowth.

40.16 The $\frac{1}{4}$ sec. cor.; the point of a decayed stake in mound of earth.

At point of the old stake,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with deposit of broken glass at base of post, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
S 25 | S 30
1934

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. raise a mound

Thence

N. 0°16' W., on true line on E. bdy. of sec. 25.

27.90 Dry wash, 75 lks. wide, 7 ft. deep, course NW.

Resurvey of the E. bdy. of T.6 S., R.12 W.

chains

40.13 The cor. of secs. 19, 24, 25 and 30; the point of a decayed stake in mound of earth.

At point of the stake,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with deposit of broken glass at base of post, for cor. of secs. 19, 24, 25 and 30, with brass cap mkd.

T 6 S

R 12 W | R 11 W

S 24 | S 19

S 25 | S 30

1934

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. raise a mound

Land, level.

Soil, sand and stone, 3d rate.

Timber, scattered palo verde and ironwood; undergrowth, greasewood and sage.

N. $0^{\circ}20'$ W., on true line on E. bdy. of sec. 24.

Over nearly level land, thru scattered timber and undergrowth.

1.70 Dry wash, 10 lks. wide, course W.

10.60 Leave upland and descend 30 ft., thru dense mesquite thicket.

16.00 Enter valley, bears NE. and SW.

19.57 Old abandoned telephone line, bears N. 60° E. and S. 60° W.

40.06 The $\frac{1}{4}$ sec. cor., which is an old mound of earth.

In the mound.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with deposit of broken glass at base of post, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 24 | S 19

1934

from which

The original bearing trees

A mesquite, bears S. 21° W., 146 lks. dist.

A mesquite, bears N. 81° W., 150 lks. dist.

And new bearing trees

A mesquite, 8 ins. diam., bears S. $24\frac{1}{4}^{\circ}$ E., 103 lks. dist., mkd. $\frac{1}{4}$ S 19 B T.

Resurvey of the E. bdy. of T.6 S., R.12 W.

BOOK 4079

chains

A mesquite, 9 ins. diam., bears S. 72° W., 116 lks. dist., mkd. $\frac{1}{4}$ S 24 B T.

Thence

N. $0^{\circ}13'$ W., on true line on E. bdy. of sec. 24.

40.22 The point for cor. of secs. 13, 18, 19 and 24, determined from position of original bearing trees.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with deposit of broken glass at base of post, for cor. of secs. 13, 18, 19 and 24, with brass cap mkd.

T 6 S	
R 12 W R 11 W	
S 13	S 18
S 24	S 19

1934

from which

The original bearing trees

A mesquite, 12 ins. diam., bears N. 83° W., 64 lks. dist.

A mesquite, 8 ins. diam., bears N. $55\frac{1}{2}^{\circ}$ E., 83 lks. dist.

And new bearing trees

A mesquite, 9 ins. diam., bears N. $76\frac{1}{2}^{\circ}$ E., 112 lks. dist., mkd. T 6 S R 11 W S 18 B T.

A mesquite, 8 ins. diam., bears S. 80° E., 52 lks. dist., mkd. T 6 S R 11 W S 19 B T.

A mesquite, 12 ins. diam., bears S. 18° W., 45 lks. dist., mkd. T 6 S R 12 W S 24 B T.

A mesquite, 8 ins. diam., bears N. 67° W., 27 lks. dist., mkd. T 6 S R 12 W S 13 B T.

Land, level.

Soil, sandy, 2d and 3d rate.

Timber, mesquite, undergrowth, timber weed, mesquite, greasewood and sage.

N. $0^{\circ}09'$ W., on true line on E. bdy. of sec. 13.

Over level land, thru heavy timber and dense undergrowth.

39.98 The point for $\frac{1}{4}$ sec. cor., determined from original bearing trees.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with bottle deposited alongside, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$	
S 13	S 18

1934

from which

Resurvey of the E. bdy. of T.6 S., R.12 W.

chains

The original bearing trees

A mesquite, 20 ins. diam., bears S. $21\frac{1}{2}^{\circ}$ E., 221 lks. dist., showing distinct marks $\frac{1}{4}$ S B T.

A mesquite, 24 ins. diam., bears S. $82\frac{1}{2}^{\circ}$ W., 121 lks. dist., mkd. but illegible.

And new bearing trees

A mesquite, 16 ins. diam., bears S. 45° E., 99 lks. dist., mkd. $\frac{1}{4}$ S 18 B T.

A mesquite, 16 ins. diam., bears S. 59° W., 76 lks. dist., mkd. $\frac{1}{4}$ S 13 B T.

Thence

N. $0^{\circ}17'$ W., on true line on E. bdy. of sec. 13.

4.50 Leave mesquite thicket.

19.50 Left bank of the channel of Gila river, course W.

34.00 Right bank of the channel of Gila river, course W.

Thence over old river bed subject to overflow by extreme high water.

40.40 At proportional distance.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with bottle deposited alongside, for cor. of secs. 7, 12, 13 and 18, with brass cap mkd.

T 6 S

R 12 W R 11 W

S 12 | S 7

S 13 | S 18

1934

No accessories.

Land, level.

Soil, sand, 2d and 3d rate.

Timber, mesquite, undergrowth, mesquite, arrow and burro weed.

N. $0^{\circ}17'$ W., on true line on E. bdy. of sec. 12.

Over river bed, thru dense undergrowth.

3.00 Leave old river bed, continue over valley.

40.40 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with bottle deposited alongside, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

 $\frac{1}{4}$

S 12 | S 7

1934

No accessories.


Resurvey of the E. bdy. of T.6 S., R.12 W.

BOOK 4078

chains

- 72.10 Old picket fence, bears E. and W.
- 80.05 Old road, bears E. and W.
- 80.53 Fence, bears E. and W., at a point 34 lks. E. of cor. of fences E., W. and S.
- 80.80 Proportional distance.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with small bottle deposited alongside, for cor. of secs. 1, 6, 7 and 12, with brass cap mkd.



from which

- A mesquite, 11 ins. diam., bears N. $40\frac{1}{2}^\circ$ E., 100 lks. dist., mkd. T 6 S R 11 W S 6 B T.
- A mesquite, 16 ins. diam., bears S. 57° E., 87 lks. dist., mkd. T 6 S R 11 W S 7 B T.
- A mesquite, 7 ins. diam., bears S. $38\frac{3}{4}^\circ$ W., 16 lks. dist., mkd. T 6 S R 12 W S 12 B T.
- A mesquite, 14 ins. diam., bears N. $36\frac{1}{4}^\circ$ W., 33 lks. dist., mkd. T 6 S R 12 W S 1 B T.

Land, level.
 Soil, sand, 2d and 3d rate.
 Timber, mesquite and cottonwood; undergrowth, mesquite, burro and arrow weed.

N. $0^\circ 17'$ W., on true line on E. bdy. of sec. 1.

Over level land, thru scattered timber and dense undergrowth.

- 21.25 Leave valley land, enter desert and mesquite thicket.
- 24.05 Road, bears E. and W.
- 40.40 The $\frac{1}{4}$ sec. cor., which is a stake $3\frac{1}{2}$ ins. diam., 3 ft. above ground in mound of earth.

In place of the stake, reset alongside.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with bottle deposited alongside, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



from which

An original bearing tree

- A mesquite, 9 ins. diam., S. 81° E., 206 lks. dist.

Resurvey of the E. bdy. of T.6 S., R.12 W.

chains

And new bearing trees.

A mesquite, 5 ins. diam., bears S. 31° E., 87 lks.
dist., mkd. $\frac{1}{4}$ S 6 B T.

A mesquite, 6 ins. diam., bears S. $68\frac{3}{4}^{\circ}$ W., 115 lks.
dist., mkd. $\frac{1}{4}$ S 1 B T.

Thence

N. $0^{\circ}01'$ E., on true line on E. bdy. of sec. 1.

41.23 The original closing cor. of T.6 S., Rs.11 and 12 W.,
which is a weather worn post, 4 ins. sq., 26 ins. above
ground in mound of earth.

41.52 Intersect the 1st Stan. Par. S.,

Set an iron post 3 ft. long, 3 ins. diam., 27 ins. in the
ground with bottle deposited alongside, for closing cor.
of T.6 S., Rs.11 and 12 W., with brass cap mkd.

T 5 S R 11 W

S 31

S 1 | S 6

R 12 W | R 11 W

C | C

1934

18x18x12 ins., E., W. and S. of post, 3 ft. dist. dig pits,

From this closing cor., the standard cor. of T.5 S., Rs.
11 and 12 W., bears N. $89^{\circ}03'$ W., 13.29 chs. dist.; de-
scribed in the field notes of the 1st Stan. Par. S., thru
Rs.9, 10, 11 and 12 W., resurveyed under this group.

Also from this closing cor., the standard $\frac{1}{4}$ sec. cor. on
S. bdy. of sec. 31, T.5 S., R.11 W., bears S. $89^{\circ}03'$ E.,
16.91 chs. dist., also described in the field notes of
the 1st Stan. Par. S., thru Rs.9, 10, 11 and 12 W., re-
surveyed under this group.

Land, level.

Soil, sandy, 2d rate.

Timber, mesquite, undergrowth, arrowweed, greasewood and
sage.

Resurvey of the E. bdy. of T.7 S., R.12 W.,
superseding the survey by T. F. White in 1877.

From the cor. of Ts.6 and 7 S., Rs.11 and 12 W.

South, on a random line along the E. bdy. of T.7 S., R.
12 W.

40.12 A point 5 lks. W. of the $\frac{1}{4}$ sec. cor. of secs. 1 and 6.

80.20 A point 11 lks. W. of the cor. of secs. 1, 6, 7 and 12.

120.42 A point 20 lks. W. of the $\frac{1}{4}$ sec. cor. of secs. 7 and 12.

Resurvey of the E. bdy. of T.7 S., R.12 W.

BOOK 4079

chains

- 160.42 Find no evidence of the cor. of secs. 7, 12, 13 and 18.
Set temp. cor.
- 200.48 A point 36 lks. W. of the $\frac{1}{4}$ sec. cor. of secs. 13 and 18.
- 240.65 A point 41 lks. W. of the cor. of secs. 13, 18, 19 and 24.
- 280.73 A point 48 lks. W. of the $\frac{1}{4}$ sec. cor. of secs. 19 and 24.
- 320.77 A point 56 lks. W. of the cor. of secs. 19, 24, 25 and 30.
- 360.85 A point 64 lks. W. of the $\frac{1}{4}$ sec. cor. of secs. 25 and 30.
- 400.91 A point 69 lks. W. of the cor. of secs. 25, 30, 31 and 36.
- 441.00 A point 66 lks. W. of the $\frac{1}{4}$ sec. cor. of secs. 31 and 36.
- 480.99 A point 69 lks. W. of the cor. of T.7 S., Rs.11 and 12 W.

Return to the cor. of Ts.6 and 7 S., Rs.11 and 12 W.

Thence

S. $0^{\circ}04'$ E., on true line on E. bdy. of sec. 1.

Over nearly level land, thru scattered timber and undergrowth.

- 20.50 Dry wash, 75 lks. wide, 4 ft. deep, course SW.

- 40.12 A stake set by the Colorado River Commission, with original stake lying alongside.

In place of the stake, replaced alongside,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with deposit of broken glass at base of post, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
S 1 | S 6

1934

from which

A palo verde, 6 ins. diam., bears N. $2\frac{3}{4}^{\circ}$ E., 110 lks. dist., mkd. $\frac{1}{4}$ S 6 B T.A mesquite, 9 ins. diam., bears N. 42° W., 75 lks. dist., mkd. $\frac{1}{4}$ S 1 B T.

Thence

S. $0^{\circ}05'$ E., on true line on E. bdy. of sec. 1.

- 32.20 A road, bears NE. and SW.

- 35.50 A dry wash, 30 lks. wide, 4 ft. deep, course NW.

- 40.08 The cor. of secs. 1, 6, 7 and 12, which is a stake 4 ins. diam., 2 ft. above ground with weather worn scribe marks.

In place of the stake, replaced alongside,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with deposit of glass bottle alongside, for cor.

Resurvey of the E. bdy. of T.7 S., R.12 W.

chains

of secs. 1, 6, 7 and 12, with brass cap mkd.

T 7 S	
R 12 W	R 11 W
S 1	S 6

S 12	S 7
1934	

18x18x12 ins., in each sec., 3 ft. dist.

dig pits,

Land, level.

Soil, sand and gravel, 2d and 3d rate.

Timber, palo verde and mesquite; undergrowth, greasewood, mesquite, sage and cacti.

S. 0°07' E., on true line on E. bdy. of sec. 12.

Over nearly level land, thru scattered timber and dense undergrowth.

18.40 Old road, bears NW. and SE.

40.22 The $\frac{1}{4}$ sec. cor., which is an old stake, 3 ins. diam., 1 ft. above ground with faint outlines of scribe marks.

In place of the stake, replaced alongside,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with deposit of broken glass alongside, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$	
S 12	S 7

1934	

18x18x12 ins., N. and S. of post, 3 ft. dist.

dig pits,

41.76 A dry wash, 40 lks. wide, 4 ft. deep, course NE.

80.25 At proportional distance.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with deposit of broken glass at base of post, for cor. of secs. 7, 12, 13 and 18, with brass cap mkd.

T 7 S	
R 12 W	R 11 W
S 12	S 7

S 13	S 18
1934	

18x18x12 ins., in each sec., 3 ft. dist.

dig pits,

Land, level.

Soil, sandy loam and gravel, 2d and 3d rate.

Timber, palo verde and mesquite; undergrowth, greasewood, sage, cacti and catclaw.

Resurvey of the E. bdy. of T.7 S., R.12 W.

BOOK 4079

chains

S. 0°07' E., on true line of E. bdy. of sec. 13.

Over nearly level land, thru scattered timber and undergrowth.

- 5.02 Telephone line, bears N. 81½° E., and S. 81½° W.
- 5.65 U. S. Highway No. 80, bears N. 81½° E. and S. 81½° W.
- 7.22 Telephone line, bears N. 81½° E. and S. 81½° W.
- 7.94 Southern Pacific R. R., bears N. 81½° E. and S. 81½° W.
- 8.59 Telephone line, bears N. 81½° E. and S. 81½° W.
- 9.57 A telephone and telegraph line, bears N. 81½° E. and S. 81½° W.
- 40.03 The ¼ sec. cor., which is an old stake, 4 ins. diam., 16 ins. above ground in mound of earth.

At point of the stake, reset alongside,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with glass bottle deposited alongside, for ¼ sec. cor., with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 13 \mid \text{S } 18 \\ 1934 \end{array}$$

18x18x12 ins., N. and S. of post, 3 ft. dist. dig pits,

Thence

S. 0°04' E., on true line on E. bdy. of sec. 13.

- 9.70 Road, bears NW. and S.
- 15.20 Road, bears N. and SE.
- 40.17 The cor. of secs. 13, 18, 19 and 24, which is an old stake, 4 ins. diam., 2 ft. above ground in mound of earth.

In place of the stake, reset alongside,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with pickle jar deposited alongside, for cor. of secs. 13, 18, 19 and 24, with brass cap mkd.

$$\begin{array}{c} \text{T } 7 \text{ S} \\ \text{R } 12 \text{ W } \mid \text{R } 11 \text{ W} \\ \text{S } 13 \mid \text{S } 18 \\ \hline \text{S } 24 \mid \text{S } 19 \\ 1934 \end{array}$$

18x18x12 ins., in each sec., 3 ft. dist. dig pits,

Land, level.

Soil, sandy loam and gravel, 3d rate.

Timber, palo verde and mesquite; undergrowth, greasewood, sage and cacti.

Resurvey of the E. bdy. of T.7 S., R.12 W.

chains

S. 0°06' E., on true line on E. bdy. of sec. 24.

Over level land, thru scattered timber and dense undergrowth.

40.08 The $\frac{1}{4}$ sec. cor.; the point of old 3 ins. stake in ground at cor. of fences, bearing S. and E.

At point of stake,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with deposit of broken glass at base of post, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
$$\frac{1}{4}$$

S 24	S 19
------	------

1934

18x18x12 ins., N. and S. of post, 3 ft. dist.

dig pits,

Thence

S. 0°07' E., on true line on E. bdy. of sec. 24.

12.22 Cor. of fences, bearing N. and E.

40.04 The cor. of secs. 19, 24, 25 and 30; point of decayed post at base of a redwood post 3 x 6 ins. by 30 ins above ground.

In place of the decayed post, with redwood post alongside,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with pint flask deposited alongside, for cor. of secs. 19, 24, 25 and 30, with brass cap mkd.

T 7 S	
R 12 W	R 11 W

S 24	S 19
------	------

S 25	S 30
------	------

1934

18x18x12 ins., in each sec., 3 ft. dist.

dig pits,

Land, nearly level.

Soil, sandy loam and gravel, 3d rate.

Timber, palo verde and ironwood; undergrowth, greasewood, sage, timber weed and cacti.

S. 0°07' E., on true line on E. bdy. of sec. 25.

Over nearly level land, thru scattered timber and undergrowth.

40.08 The $\frac{1}{4}$ sec. cor., which is a decayed stake in center of old mound of earth.

In place of the stake,

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bed rock, and supported in a mound of stone to

Resurvey of the E. bdy. of T.7 S., R.12 W.

BOOK 4078

chains

top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
$$\begin{array}{c} \frac{1}{4} \\ \text{S } 25 \mid \text{S } 30 \\ 1934 \end{array}$$

No accessories.

Thence

S. $0^{\circ}04'$ E., on true line on E. bdy. of sec. 25.

40.06 The cor. of secs. 25, 30, 31 and 36, which is a mound of earth, with old stake lying on top.

In mound,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with pint flask deposited alongside, for cor. of secs. 25, 30, 31 and 36, with brass cap mkd.

$$\begin{array}{c} \text{T } 7 \text{ S} \\ \text{R } 12 \text{ W} \mid \text{R } 11 \text{ W} \\ \text{S } 25 \mid \text{S } 30 \\ \hline \text{S } 36 \mid \text{S } 31 \\ 1934 \end{array}$$

18x18x12 ins., in each sec., 3 ft. dist.

renew pits,

Land, level.

Soil, sandy loam and gravel, 2d and 3d rate.

Timber, palo verde, ironwood and mesquite; undergrowth, greasewood, sage and timber weed.

S. $0^{\circ}02'$ W., on true line on E. bdy. of sec. 36.

Over nearly level land, thru scattered timber and undergrowth.

22.00 Dry wash, 40 lks. wide, 5 ft. deep, course NE.

35.50 Dry wash, 40 lks. wide, 5 ft. deep, course NW.

40.09 The $\frac{1}{4}$ sec. cor., which is an old stake, 3 ins. diam., 26 ins. above ground in mound of earth with outline of pits N. and S.

In place of the stake, replaced alongside,

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, and well supported in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
$$\begin{array}{c} \frac{1}{4} \\ \text{S } 36 \mid \text{S } 31 \\ 1934 \end{array}$$

from which

An original bearing tree

Resurvey of the E. bdy. of T.7 S., R.12 W.

chains

A palo verde, bears N. $80\frac{3}{4}^{\circ}$ E., 55 lks. dist.; scribe marks visible.

And new bearing trees

A palo verde, 7 ins. diam., N. $77\frac{1}{4}^{\circ}$ E., 55 lks. dist., mkd. $\frac{1}{4}$ S 31 B T.

An ironwood, 6 ins. diam., N. $30\frac{1}{4}^{\circ}$ W., 96 lks. dist., mkd. $\frac{1}{4}$ S 36 B T.

Thence

S. $0^{\circ}02'$ E., on true line on E. bdy. of sec. 36.

3.00 Leave desert land, enter hills, bears E. and W.

Asc. 100 ft. over N. slope.

23.25 A spur, slopes E., desc. 50 ft. to corner.

39.99 The cor. of T.7 S., Rs.11 and 12 W., which is an old stake 4 ins. sq., 38 ins. above ground in mound of stone.

In place of the stake, replaced alongside,

Set an iron post, 3 ft. long, 3 ins. diam., 12 ins. in the ground to bed rock, and supported in a mound of stone to top, for cor. of T.7 S., Rs.11 and 12 W., with brass cap mkd.

T 7 S
R 12 W R 11 W
S 36 | S 31

T 8 S

1934

No accessories.

Land, level and hilly.

Soil, sandy loam and rocky, 3d and 4th rate.

Timber, palo verde, mesquite and ironwood; undergrowth, greasewood, sage and cacti.

Resurvey of the S. bdy. of T.7 S., R.11 W.,
superseding the resurvey by L. Wolfley in 1893.

N. $89^{\circ}57'$ E., on random line along the S. bdy. of T.7 S., R.11 W.

38.63 A point 0.64 chs. S. of the $\frac{1}{4}$ sec. cor. on S. bdy. of sec. 31.

78.57 A point 1.22 chs. S. of the cor. of secs. 31 and 32.

118.57 Find no evidence of the $\frac{1}{4}$ sec. cor. on S. bdy. of sec. 32. Set temp. cor.

158.57 Find no evidence of the cor. of secs. 32 and 33. Set temp. cor.

198.83 A point 1.85 chs. S. of the $\frac{1}{4}$ sec. cor. on S. bdy. of sec.

Resurvey of the S. bdy. of T.7 S., R.11 W.

DOK 4079

chains

33.

238.93 A point 1.72 chs. S. of the cor. of secs. 33 and 34.

278.93 Find no evidence of the $\frac{1}{4}$ sec. cor. on S. bdy. of sec. 34.
Set temp. cor.

318.78 A point 1.49 chs. S. of the cor. of secs. 34 and 35.

359.26 A point 1.60 chs. S. of the $\frac{1}{4}$ sec. cor. on S. bdy. of sec.
35.

399.36 A point 1.40 chs. S. of the cor. of secs. 35 and 36.

439.36 A point 1.31 chs. S. of the $\frac{1}{4}$ sec. cor. on S. bdy. of sec.
36.

479.47 A point 1.34 chs. S. of the cor. of Ts. 7 and 8 S., R. 11 W.

Return to the cor. of T.7 S., Rs.11 and 12 W.

Thence

N. 89°01' E., on true line on S. bdy. of sec. 31.

Over hilly land, thru scattered timber and undergrowth,
along broken S. slope.

27.00 Point of hill, sloping S., desc. 75 ft. to

32.00 Dry wash, 30 lks. wide, course SE., leave hills and enter
rolling desert land.38.64 The $\frac{1}{4}$ sec. cor., which is an old mound of earth with old
stake lying on top.

In mound,

Set an iron post, 3 ft. long, 1 in. diam., 17 ins. in the
ground, and supported in a mound of stone to top, with de-
posit of broken glass at base of post, for $\frac{1}{4}$ sec. cor. for
sec. 31 only, with brass cap mkd. $\frac{1}{4}$ S 31

1934

No accessories.

Thence

N. 89°08' E., on true line on S. bdy. of sec. 31.

39.95 The cor. of secs. 31 and 32, which is a stake established
by the Colorado River Commission, in old mound of earth
with original cor. stake lying alongside.

At point of the stake, with stakes alongside,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the
ground with deposit of broken glass at base of post, for
cor. of secs. 31 and 32, only, with brass cap mkd.

Resurvey of the S. bdy. of T.7 S., R.11 W.

chains

T 7 S R 11 W

S 31 | S 32

T 8 S

1934

18x18x12 ins., in secs. 31 and 32, 3 ft. dist. dig pits,

Land, hilly and rolling.

Soil, stony and sand. 3d and 4th rate.

Timber, palo verde and mesquite; undergrowth, greasewood, sage, gumweed and cacti.

N. 89°39' E., on true line on S. bdy. of sec. 32.

Over land gradually changing from rolling to level, thru scattered timber and undergrowth.

- 40.08 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with deposit of broken glass at base of post, for $\frac{1}{4}$ sec. cor. of sec. 32 only, with brass cap mkd.

 $\frac{1}{4}$ S 32

1934

18x18x12 ins., E. and W. of the post, 3 ft. dist. dig pits,

- 80.17 Proportional distance.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with deposit of broken glass at base of post, for cor. of secs. 32 and 33 only, with brass cap mkd.

T 7 S R 11 W

S 32 | S 33

T 8 S

1934

18x18x12 ins., in secs. 32 and 33, 3 ft. dist. dig pits,

Land, rolling and level.

Soil, sandy loam and coarse gravel, 3d rate.

Timber, palo verde and mesquite; undergrowth, greasewood, sage, timber-weed and cacti.

N. 89°39' E., on true line on S. bdy. of sec. 33.

Over nearly level land, thru scattered timber and undergrowth.

- 5.19 A point 1.42 chs. N. of a redwood post, 4 ins. sq., 3 $\frac{1}{2}$ ft. above ground, mkd. Yuma on W., Maricopa on E., VII on N. and VIII on S. faces.

- 40.09 The $\frac{1}{4}$ sec. cor., which is an old stake in mound of earth, with faint scribe marks.

Resurvey of the S. bdy. of T.7 S., R.11 W.

BOOK 4079

chains

In place of the old stake, replaced alongside,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with deposit of glass at base of post, for $\frac{1}{4}$ sec. cor. of sec. 33 only, with brass cap mkd. $\frac{1}{4}$ S 33

1934

18x18x12 ins., E. and W. of post, 3 ft. dist.

dig pits,

Thence

S. 89°52' E., on true line on S. bdy. of sec. 33.

40.10 The cor. of secs. 33 and 34, which is a stake set by the Colorado River Commission, with original cor. stake lying on ground alongside.

In place of the stake found, replaced with original stake alongside,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with 4 oz. blue bottle deposited alongside, for cor. of secs. 33 and 34, only, with brass cap mkd.

T 7 S R 11 W

S 33 | S 34

T 8 S

1934

18x18x12 ins., in secs. 33 and 34, 3 ft. dist.

dig pits,

Land, level.

Soil, sandy loam, 2d rate.

Timber, palo verde, mesquite and ironwood; undergrowth, greasewood, sage, catclaw and cacti.

S. 89°53' E., on true line on S. bdy. of sec. 34.

Over nearly level land, thru scattered timber and undergrowth.

39.92 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with broken glass deposited at base of post, for $\frac{1}{4}$ sec. cor. of sec. 34 only, with brass cap mkd. $\frac{1}{4}$ S 34

1934

18x18x12 ins., E. and W. of cor., 3 ft. dist.

dig pits,

54.00 Base of malpais hill, bears N. and S., asc. W. slope 30 ft.

57.25 Top of malpais hill, bears N. and S., desc. E. slope 17 ft.

60.00 Base of malpais hill, bears N. and S., enter level desert.

79.85 The cor. of secs. 34 and 35, which is a stake 5 ins. diam.

Resurvey of the S. bdy. of T.7 S., R.11 W.

chains

3 ft. above ground, with faint indications of scribe marks.

In place of the stake, replaced alongside,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with broken glass deposited at base of post, for cor. of secs. 34 and 35 only, with brass cap mkd.

T 7 S R 11 W

S 34 | S 35

T 8 S

1934

18x18x12 ins., in each sec., 3 ft. dist.

dig pits,

Land, level and hilly.

Soil, on desert sandy loam, 2d rate; on hill stony, 4th rate.

Timber, palo verde, mesquite and ironwood; undergrowth, greasewood, sage, catclaw and cacti.

N. 89°48' E., on true line on S. bdy. of sec. 35.

Over nearly level land, thru scattered timber and undergrowth

Timber gradually disappearing.

40.48 The $\frac{1}{4}$ sec. cor., which is a stake 3 ins. diam., 4 ins. above ground with top of stake scribe marked, lying alongside,

In place of the stake, replaced alongside,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with deposit of broken glass at base of post, for $\frac{1}{4}$ sec. cor. of sec. 35 only, with brass cap mkd. $\frac{1}{4}$ S 35

1934

18x18x12 ins., E. and W. of post, 3 ft. dist.

dig pits,

Thence

S. 89°50' E., on true line on S. bdy. of sec. 35.

40.10 The cor. of secs. 35 and 36, which is an old stake 4 ins. diam., 2 ft. above ground, with outlines of scribe marks in old mound of earth.

In place of the stake, replaced alongside,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with deposit of broken glass at base, for cor. of secs. 35 and 36 only, with brass cap mkd.

T 7 S R 11 W

S 35 | S 36

T 8 S

1934

Resurvey of the S. bdy. of T.7 S., R.11 W.

BOOK 4079

chains

18x18x12 ins., in secs. 35 and 36, 3 ft. dist. dig pits,

Land, level.

Soil, sandy loam, 2d rate.

Timber, very scattering, palo verde and mesquite; undergrowth, greasewood, sage, cacti and mesquite.

S. 89°49' E., on true line on S. bdy. of sec. 36.

Over nearly level land, thru scattered undergrowth.

40.00 The $\frac{1}{4}$ sec. cor., which is a stake set by the Colorado River Commission, with original stake lying on ground alongside.

In place of the stake, reset alongside,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with deposit of broken glass at base of post, for $\frac{1}{4}$ sec. cor. of sec. 36 only, with brass cap mkd.

$\frac{1}{4}$ S 36

1934

18x18x12 ins., E. and W. of post, 3 ft. dist. dig pits,

Thence

N. 89°55' E., on true line on S. bdy. of sec. 36.

40.11 The cor. of Ts.7 and 8 S., R.11 W., which is an iron post 3 ins. diam., 9 ins. above ground, with brass cap mkd.

T 7 S

R 11 W T 7 S

S 36

R 10 W

S 1 S 31

T 8 S

1932

18x18x12 ins., in secs. 1 and 36, 3 ft. dist. renew pits,

Land, level.

Soil, sandy loam, 2d rate.

Timber, none; undergrowth, greasewood, sage, cacti and mesquite.

Resurvey of a portion of the E. bdy. of T.7 S., R.11 W., superseding the resurvey by B. J. Kinsey in 1932.

From the cor. of secs. 25 and 36, on E. bdy. of T.7 S., R.11 W.

N. 0°52' E., on a random line along the E. bdy. of sec.

25

Resurvey of the S. bdy. of T.7 S., R.11 W.

chains

- 40.16 A point 0.58 chs. E. of the $\frac{1}{4}$ sec. cor.
Therefore the true bearing for the S. $\frac{1}{2}$ mile on E. bdy. of sec. 25, is
N. 0°02' E., and distance as given in the official record.
-
- Resurvey of the S. bdy. of T.7 S., R.12 W.,
superseding the resurvey by L. Wolfley in 1893.
-
- From the cor. of T.7 S., Rs.11 and 12 W.
S. 89°50' W., on random line along the S. bdy. of T.7 S.,
R.12 W.
- 39.99 A point 3 lks. S. of the $\frac{1}{4}$ sec. cor. of sec. 36.
80.23 A point 9 lks. S. of the cor. of secs. 35 and 36.
120.34 A point 16 lks. S. of the $\frac{1}{4}$ sec. cor. of sec. 35.
160.42 A point 24 lks. S. of the cor. of secs. 34 and 35.
200.51 A point 33 lks. S. of the $\frac{1}{4}$ sec. cor. of sec. 34.
240.47 A point 40 lks. S. of the cor. of secs. 33 and 34.
280.57 A point 44 lks. S. of the $\frac{1}{4}$ sec. cor. of sec. 33.
320.57 Find no evidence of the cor. of secs. 32 and 33.
Set temp. cor.
360.57 Find no evidence of the $\frac{1}{4}$ sec. cor. of sec. 32.
Set temp. cor.
400.57 Find no evidence of the cor. of secs. 31 and 32.
Set temp. cor.
440.57 Find no evidence of the $\frac{1}{4}$ sec. cor. of sec. 31.
479.55 A point 63 lks. S. of the cor. of T.7 S., Rs.12 and 13 W.,
which is a stake 5 ins. diam., 3 ft. above ground, with
faint outlines of original scribe marks.
- In place of the stake, replaced alongside,
Set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in the
ground, for cor. of T.7 S., Rs.12 and 13 W., with brass
cap mkd.
- | | |
|--------------|--------|
| T 7 S | |
| R 13 W | R 12 W |
| S 36 | S 31 |
| ----- | |
| S 6 | |
| T 8 S R 12 W | |
| 1934 | |
- 18x18x12 ins., E., N. and W. of the post, 3 ft. dist. dig pits,
- Thence

Resurvey of the S. bdy. of T.7 S., R.12 W.

BOOK 4079

chains

N. 89°53' E., on true line on S. bdy. of sec. 31.

Over nearly level land, thru scattered undergrowth.

38.62 Proportional distance.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with pint bottle deposited alongside, for $\frac{1}{4}$ sec. cor. of sec. 31 only, with brass cap mkd. $\frac{1}{4}$ S 31

1934

18x18x12 ins., E. and W. of post, 3 ft. dist.

dig pits,

78.71 Proportional distance.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with pint bottle deposited alongside, for cor. of secs. 31 and 32 only, with brass cap mkd.

T 7 S R 12 W

S 31 | S 32

S 5

T 8 S

1934

18x18x12 ins., E. and W. of post, 3ft. dist.

dig pits,

Land, level and rolling.

Soil, sandy, 2d and 3d rate.

Timber, none; undergrowth, greasewood, sage and cacti.

N. 89°53' E., on true line on S. bdy. of sec. 32.

Over nearly level land, thru dense undergrowth.

40.09 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with deposit of pint bottle alongside, for $\frac{1}{4}$ sec. cor. of sec. 32 only, with brass cap mkd. $\frac{1}{4}$ S 32

1934

18x18x12 ins., E. and W. of post, 3 ft. dist.

dig pits,

80.18 Proportional distance.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with pint beer bottle deposited alongside, for cor. of secs. 32 and 33 only, with brass cap mkd.

T 7 S R 12 W

S 32 | S 33

S 4

T 8 S

1934

from which

Resurvey of the S. bdy. of T.7 S., R.12 W.

chains

An ironwood, 10 ins. diam., bears N. $6\frac{1}{2}^{\circ}$ E., 116 lks. dist., mkd. T 7 S R 12 W S 33 B T.

An ironwood, 14 ins. diam., bears N. 18° W., 196 lks. dist., mkd. T 7 S R 12 W S 32 B T.

Land, level..

Soil, sandy loam, 2d rate.

Timber, scattered ironwood; undergrowth, greasewood, sage and cacti.

N. $89^{\circ}53'$ E., on true line on S. bdy. of sec. 33.

Over nearly level land, thru scattered timber and dense undergrowth.

40.09 The $\frac{1}{4}$ sec. cor.; the point of a decayed stake in old mound of earth.

In place of the decayed stake,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with pint beer bottle deposited alongside, for $\frac{1}{4}$ sec. cor. of sec. 33 only, with brass cap mkd.

$\frac{1}{4}$ S 33

1934

18x18x12 ins., E. and W. of post, 3 ft. dist.

dig pits,

80.19 The cor. of secs. 33 and 34, which is the point of a decayed stake in old mound of earth.

At point of the stake, with stake alongside,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with pint milk bottle deposited at base of post, for cor. of secs. 33 and 34 only, with brass cap mkd.

T 7 S R 12 W

S 33 | S 34

S 3

T 8 S

1934

18x18x12 ins., in secs. 33 and 34, 3 ft. dist.

dig pits,

Land, level.

Soil, sandy loam, 2d rate.

Timber, ironwood and palo verde; undergrowth, sage, greasewood and cacti.

N. $89^{\circ}57'$ E., on true line on S. bdy. of sec. 34.

Over nearly level land, thru scattered timber and dense undergrowth.

18.00 Base of hill, bears NW. and SE.; leave level desert.

Ascend 75 ft.

Resurvey of the S. bdy. of T.7 S., R.12 W.

BOOK 4079

chains

25.25 Top of hill, bears N. 20° W. and S. 38° E. for approximately 3 chs., then turns E.

Descend NE., slope 75 ft.

36.25 Base of hill, bears NW. and SE.; enter nearly level desert.

39.96 The $\frac{1}{4}$ sec. cor.; the point of a decayed stake in mound of earth.

At point of the stake, with stake alongside,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with $\frac{1}{2}$ pint bottle deposited at base of post, for $\frac{1}{4}$ sec. cor. of sec. 34 only, with brass cap mkd.

$\frac{1}{4}$ S 34

1934

18x18x12 ins., E. and W. of post, 3 ft. dist.

dig pits,

40.00 A dry wash, 40 lks. wide, drains S.

80.05 The cor. of secs. 34 and 35, which is the point of a decayed stake in mound of earth.

At point of the stake, with stake alongside,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 34 and 35 only, with brass cap mkd.

T 7 S R 12 W

S 34 | S 35

S 2

T 8 S

1934

of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor. raise a mound

Land, level and hilly.

Soil, on level land, sandy loam; 2d rate, on hill, stony, 4 th rate.

Timber, palo verde and ironwood; undergrowth, sage, greasewood and gunweed.

N. 89°57' E., on true line on S. bdy. of sec. 35.

Over nearly level land, thru scattered timber and undergrowth.

40.08 The $\frac{1}{4}$ sec. cor.; the point of a decayed stake in old mound of earth.

At point of stake, with stake alongside,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 35 only, with brass cap mkd.

$\frac{1}{4}$ S 35

1934

Resurvey of the S. bdy. of T.7 S., R.12 W.

chains

raise a mound
of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Thence

N. $89^{\circ}56'$ E., on true line on S. bdy. of sec. 35.

16.00 A desert road, bears N. and S.

40.11 The cor. of secs. 35 and 36, which is an old mound of earth, with remant of decayed post on top.

In the mound,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the for cor. of secs. 35 and 36 only, with brass cap mkd.

T 7 S R 12 W

S 35 | S 36

S 1

T 8 S

1934

raise a mound
of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Land, level.

Soil, sandy loam and gravel, 2d and 3d rate.

Timber, palo verde and ironwood; undergrowth, greasewood, sage and cacti.

N. $89^{\circ}56'$ E., on true line on S. bdy. of sec. 36.

Over nearly level land, thru scattered timber and undergrowth.

40.24 The $\frac{1}{4}$ sec. cor.; the point of a decayed stake in old mound of earth.

In place of the decayed stake,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 36 only, with brass cap mkd. $\frac{1}{4}$ S 36

1934

raise a mound
of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Thence

N. $89^{\circ}52'$ E., on true line on S. bdy. of sec. 36.

39.99 The cor. of T.7 S., Rs.11 and 12 W., heretofore described.

Land, level and rolling.

Soil, sand and gravel, 3d rate.

Timber, ironwood and palo verde; undergrowth, greasewood, sage and gunweed.

Resurvey of the W. bdy. of T.7 S., R.12 W.

BOOK 4079

chains

Resurvey of the W. bdy. of T.7 S., R.12 W.,
superseding the survey by T. F. White in 1877.

From the cor. of Ts.6 and 7 S., Rs.12 and 13 W.

South, on a random line along the W. bdy. of T.7 S., R.12 W.

- 40.46 A point 13 lks. W. of the $\frac{1}{4}$ sec. cor. of secs. 1 and 6.
- 80.51 A point 21 lks. W. of the cor. of secs. 1, 6, 7 and 12.
- 120.51 Find no evidence of the $\frac{1}{4}$ sec. cor. of secs. 7 and 12.
Set temp. cor.
- 160.67 A point 30 lks. W. of the cor. of secs. 7, 12, 13 and 18.
- 200.67 Find no evidence of the $\frac{1}{4}$ sec. cor. of secs. 13 and 18.
Set temp. cor.
- 240.84 A point 42 lks. W. of the cor. of secs. 13, 18, 19 and 24.
- 280.84 Find no evidence of the $\frac{1}{4}$ sec. cor. of secs. 19 and 24.
Set temp. cor.
- 320.84 Find no evidence of the cor. of secs. 19, 24, 25 and 30.
Set temp. cor.
- 360.84 Find no evidence of the $\frac{1}{4}$ sec. cor. of secs. 25 and 30.
Set temp. cor.
- 401.27 A point 70 lks. W. of the cor. of secs. 25, 30, 31 and 36.
- 441.27 Find no evidence of the $\frac{1}{4}$ sec. cor. of secs. 31 and 36.
Set temp. cor.
- 481.43 A point 77 lks. W. of the cor. of T.7 S., Rs.12 and 13 W.,
heretofore described.

From the cor. of T.7 S., Rs.12 and 13 W.

N. $0^{\circ}03'$ W., on true line on W. bdy. of sec. 31.

Over nearly level land, thru scattered undergrowth.

- 40.08 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the
ground with a pint bottle deposited alongside, for $\frac{1}{4}$ sec.
cor. of secs. 31 and 36, with brass cap mkd.

$\frac{1}{4}$
S 36 | S 31

1934

No accessories.

- 80.16 The cor. of secs. 25, 30, 31 and 36, which is the point
of a decayed stake in mound of earth.

At point of the stake, with stake alongside,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the
ground with $\frac{1}{2}$ pint flask deposited at base of post, for
cor. of secs. 25, 30, 31 and 36, with brass cap mkd.

Resurvey of the W. bdy. of T.7 S., R.12 W.

chains

T 7 S	
R 13 W	R 12 W
S 25	S 30
S 36	S 31

1936

18x18x12 ins., in each sec., 3 ft. dist.

dig pits,

Land, level.

Soil, sandy, 2d rate.

Timber, none; undergrowth, greasewood, sage and cacti.

N. 0°06' W., on true line on W. bdy. of sec. 30.

Over nearly level desert land, thru scattered undergrowth.

40.11 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with pint bottle deposited at base of post, for $\frac{1}{4}$ sec. cor. of secs. 25 and 30, with brass cap mkd.

$\frac{1}{4}$	
S 25	S 30
1934	

72.85 A 42 wire telephone line, bears N. 65°52' E. and S. 65°52' W.

75.57 A 5 wire telephone line, bears N. 65°52' E. and S. 65°52' W.

76.17 Center of double track road bed of Southern Pacific Railroad, same bearing.

77.04 A 16 wire telephone line, same bearing.

78.72 U. S. Highway No. 80, same bearing.

79.42 A 5 wire telephone line, same bearing.

79.79 A concrete service station, bears W., 2.10 chs. dist.

80.19 A 3 wire power line, bears E. and W., over a fence cor. of fences, bearing N. and W.

80.22 Proportional distance.

Set an iron post, 3 ft. long, 2 ins. diam., 32 ins. in the ground with deposit of broken china ware and bottle alongside of post, for cor. of secs. 19, 24, 25 and 30, with brass cap mkd.

T 7 S	
R 13 W	R 12 W
S 24	S 19
S 25	S 30

1934

No accessories.

Resurvey of the W. bdy. of T.7 S., R.12 W.

BOOK 4079

BOOK 4079

chains

Land, level.
Soil, sandy loam, 2d rate.
Timber, none; undergrowth, greasewood and sage.

N. 0°06' W., on true line on W. bdy. of sec. 19.

Over level land, thru scattered undergrowth along fence.


10.20 Water tank on tower, bears E., 15 chs. dist.; a grove of tamarac timber NE. of water tank.

11.60 Wire fence, bears W. from N. and S. fence.

20.06 A point 6 lks. W. of fence cor. of fences, bearing E. and S.

24.50 A point approximately 13.00 chs. W. of a log cabin, with another cabin 1 ch. E. of the 1st cabin.

40.10 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with pint bottle deposited alongside, for $\frac{1}{4}$ sec. cor. of secs. 19 and 24, with brass cap mkd.




18x18x12 ins., N. and S. of post, 3 ft. dist.

dig pits,

80.21 The cor. of secs. 13, 18, 19 and 24, which is the point of a decayed stake in mound of earth.

At point of the stake, with stake alongside,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 13, 18, 19 and 24, with brass cap mkd.



18x18x12 ins., in each sec., 3 ft. dist.

dig pits,

Land, level.
Soil, sandy loam, 2d rate.
Timber, none; undergrowth, greasewood, sage and cacti.

N. 0°05' W., on true line on W. bdy. of sec. 18.

Over level land, thru scattered undergrowth.

3.20 Desert road, bears E. and W.

40.08 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with green pop bottle deposited alongside, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

Resurvey of the W. bdy. of T.7 S., R.12 W.

chains

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 13 \mid \text{S } 18 \\ 1934 \end{array}$$

80.17 The cor. of secs. 7, 12, 13 and 18, which is the point of a decayed stake in mound of earth.

At the point of stake, with stake alongside,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, with brass cap mkd.

$$\begin{array}{c} \text{T } 7 \text{ S} \\ \text{R } 13 \text{ W} \mid \text{R } 12 \text{ W} \\ \text{S } 12 \mid \text{S } 7 \\ \hline \text{S } 13 \mid \text{S } 18 \\ 1934 \end{array}$$

18x18x12 ins., in each sec., 3 ft. dist.

Land, level.

Soil, sandy loam, 2d rate.

Timber, none; undergrowth, greasewood, sage and cacti.

N. 0°04' W., on true line on W. bdy. of sec. 7.

Over level land, thru scattered undergrowth.

40.08 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with pint bottle deposited alongside post, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 12 \mid \text{S } 7 \\ 1934 \end{array}$$

18x18x12 ins., N. and S. of the post, 3 ft. dist.

68.55 Road, bears E. and W.

69.95 Old road, bears NW. and SE.

80.16 The cor. of secs. 1, 6, 7 and 12, which is the point of a decayed stake in old mound of earth.

In place of the point of stake,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 1, 6, 7 and 12, with brass cap mkd.

$$\begin{array}{c} \text{T } 7 \text{ S} \\ \text{R } 13 \text{ W} \mid \text{R } 12 \text{ W} \\ \text{S } 1 \mid \text{S } 6 \\ \hline \text{S } 12 \mid \text{S } 7 \\ 1934 \end{array}$$

Resurvey of the W. bdy. of T.7 S., R.12 W.

BOOK 4079

chains

	<p>18x18x12 ins., in each sec., 3 ft. dist. dig pits,</p> <p>Land, level. Soil, sandy loam, 2d rate. Timber, none; undergrowth, greasewood, sage and cacti.</p>
	<p>N. 0°07' W., on true line on W. bdy. of sec. 6. Over level land, thru scattered timber and undergrowth.</p>
.23	A well with 24 ins. casing, bears W., 34 lks. dist.
40.05	<p>The $\frac{1}{4}$ sec. cor., which is the point of a decayed stake in mound of earth.</p> <p>At point of stake, with stake alongside, Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.</p> <p style="text-align: center;">$\frac{1}{4}$ S 1 S 6 1934</p> <p style="text-align: right;">from which</p> <p>The original bearing trees</p> <p>A palo verde, 7 ins. diam., bears N. 32° E., 60 lks. dist., mkd. $\frac{1}{4}$ S 6 B T.</p> <p>A palo verde, 10 ins. diam., bears S. 29$\frac{1}{2}$° W., 127 lks. dist., mkd. $\frac{1}{4}$ S 1 B T.</p>
	<p>Thence</p> <p>N. 0°11' W., on true line on W. bdy. of sec. 6.</p>
33.40	A road, bears N. 20° E. and S. 10° W.
40.46	The cor. of Ts.6 and 7 S., Rs.12 and 13 W., heretofore described.
	<p>Land, level. Soil, sandy loam, 2d rate. Timber, palo verde; undergrowth, greasewood, sage and cacti.</p>
	<p>Resurvey of the W. bdy. of T.6 S., R.12 W., superseding the survey by T. F. White in 1877.</p>
	<p>From the cor. of Ts.6 and 7 S., Rs.12 and 13 W.</p> <p>North, on random line along the W. bdy. of T.6 S., R.12 W. searching for evidence of the original corners without success, and setting temp. corners at record distances to</p>
320.86	A point 1.12 chs. E. of the cor. of secs. 7, 12, 13 and 18.
361.12	A point 1.06 chs. E. of the $\frac{1}{4}$ sec. cor. of secs. 7 and 12.

Resurvey of the W. bdy. of T.6 S., R.12 W.

chains

- 401.28 A point 1.07 chs. E. of the cor. of secs. 1, 6, 7 and 12.
 441.28 Find no evidence of the $\frac{1}{4}$ sec. cor. of secs. 1 and 6.
 Set temp. cor.
 483.92 A point 1.17 chs. E. of the closing cor. of T.6 S., Rs.12
 and 13 W.
 483.96 Intersect the 1st Stan. Par, S. at a point N. $89^{\circ}52'$ E.,
 17.07 chs. dist., from the standard cor. of T.5 S., Rs.12
 and 13 W.

 Return to the cor. of Ts.6 and 7 S., Rs.12 and 13 W.,
 hereinbefore described.

Thence

N. $0^{\circ}12'$ W., on true line on W. bdy. of sec. 31.

Over nearly level land, thru scattered timber and dense
 undergrowth.

- 14.50 Leave desert upland, enter river bottom.
 40.11 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the
 ground with deposit of broken glass at base of post, for
 $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
 S 36 | S 31
 1934

from which

A mesquite, 7 ins. diam., bears S. 12° E., 10 lks.
 dist., mkd. $\frac{1}{4}$ S 31 B T.

A mesquite, 8 ins. diam., bears S. $76\frac{1}{2}^{\circ}$ W., 57 lks.
 dist., mkd. $\frac{1}{4}$ S 36 B T.

- 54.15 Old road, bears NW. and SE.

- 80.22 Proportional distance.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the
 ground with 2 oz. bottle deposited alongside, for cor. of
 secs. 25, 30, 31 and 36, with brass cap mkd.

T 6 S
 R 13 W | R 12 W
 S 25 | S 30

 S 36 | S 31
 1934

from which

A cottonwood, 13 ins. diam., bears N. $77\frac{1}{2}^{\circ}$ E., 310 lks.
 dist., mkd. T 6 S R 12 W S 30 B T.

A cottonwood, 14 ins. diam., bears S. $82\frac{1}{4}^{\circ}$ E., 443 lks.
 dist., mkd. T 6 S R 12 W S 31 B T.

Resurvey of the W. bdy. of T.6 S., R.12 W.

BOOK 4079

chains

A mesquite, 5 ins. diam., bears N. 85 1/4° W., 140 lks. dist., mkd. T 6 S R 13 W S 25 B T.

No tree available in sec. 36.

No stone within a reasonable dist., and pits impracticable.

Land, level.

Soil, sandy, 2d and 3d rate.

Timber, mesquite and cottonwood; undergrowth, mesquite, and arrowweed.

N. 0°12' W., on true line on W. bdy. of sec. 30.

Over level river bottom, thru scattered timber and dense undergrowth.

39.40 The present S. bank of dry channel of Gila River, course W.

40.11 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with small bottle deposited alongside, for 1/4 sec. cor., with brass cap mkd.

1/4
S 25 | S 30
1934

No trees or stone available and pits impracticable.

60.85 The present N. bank of dry channel of Gila River, course W.

80.21 Proportional distance.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with deposit of small medicine bottle alongside, for cor. of secs. 19, 24, 25 and 30, with brass cap mkd.

T 6 S
R 13 W | R 12 W
S 24 | S 19

S 25 | S 30
1934

No trees or stone for mound available and pits impracticable.

Land, level.

Soil, sand, 3d rate.

Timber, mesquite; undergrowth, mesquite, arrow and timber weed.

N. 0°12' W., on true line on W. bdy. of sec. 19.

Over level land, thru scattered timber and dense undergrowth.

11.95 Road, bears E. and W.

22.20 Old rail fence, bears NE. and SW.

Resurvey of the W. bdy. of T.6 S., R.12 W.

chains

25.50 Leave river bottom, enter desert upland, bears NE. and SW.

39.49 Fence, bears E., and W. 8 lks. to fence cor. from which fence bears S.

40.11 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
$$\begin{array}{c} \frac{1}{4} \\ \text{S } 24 \text{ | S } 19 \end{array}$$

1934

from which

A mesquite, 7 ins. diam., bears S. 85° E., 7 lks. dist., mkd. $\frac{1}{4}$ S 19 B T.A mesquite, 5 ins. diam., bears N. $57\frac{3}{4}^{\circ}$ W., 41 lks. dist., mkd. $\frac{1}{4}$ S 24 B T.43.75 Cross a fence, bearing N. $1\frac{1}{4}^{\circ}$ E. and S. $\frac{1}{4}^{\circ}$ W.

45.93 Fence, bears W., and E. 6 lks. to fence cor. of fences N. S. and W.

60.63 A point 1.58 chs. E. of the cor. of fences bearing N. and W.

79.50 Old cross roads, bears N., S., E. and W., now abandoned.

80.22 Proportional distance.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with pint glass jar deposited alongside, for cor. of secs. 13, 18, 19 and 24, with brass cap mkd.

T 6 S

$$\begin{array}{c} \text{R } 13 \text{ W | R } 12 \text{ W} \\ \text{S } 13 \text{ | S } 18 \\ \hline \text{S } 24 \text{ | S } 19 \end{array}$$

1934

from which

A mesquite, 7 ins. diam., bears N. 77° E., 259 lks. dist., mkd. T 6 S R 12 W S 18 B T.A mesquite, 5 ins. diam., bears S. $11\frac{3}{4}^{\circ}$ W., 68 lks. dist., mkd. T 6 S R 13 W S 24 B T.A mesquite, 6 ins. diam., bears N. $3\frac{1}{2}^{\circ}$ W., 66 lks. dist., mkd. T 6 S R 13 W S 13 B T.

No tree available in sec. 19.

No stone within a reasonable dist. and pits impracticable.

Land, level.

Soil, sand and sandy clay, 2d and 3d rate.

Timber, palo verde and mesquite; undergrowth, greasewood, sage and cacti.

N. $0^{\circ}12'$ W., on true line on W. bdy. of sec. 18.

Resurvey of the W. bdy. of T.6 S., R.12 W.

BOOK 4078

chains

Over level land, thru scattered timber and dense undergrowth.

19.50 Fence, bears E. and W., 16 lks. to a fence cor. of fences bearing N., S., E. and W.

40.11 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with quart fruit jar deposited alongside for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\frac{1}{4}$$

$$S 13 | S 18$$

1934

from which

A mesquite, 7 ins. diam., bears S. $20\frac{1}{4}^{\circ}$ E., 80 lks. dist., mkd. $\frac{1}{4}$ S 18 B T.

A mesquite, 6 ins. diam., bears S. 20° W., 140 lks. dist., mkd. $\frac{1}{4}$ S 13 B T.

45.80 Old ditch line, bears E. and W.

52.45 A point 20 lks. E. of a cor. of old fences bearing S. and W.

54.75 Leave bottom land, enter desert.

80.21 The cor. of secs. 7, 12, 13 and 18, which is a mesquite stake, 5 ins. diam., 30 ins. above ground in mound of earth.

No evidence of original bearing trees.

In place of the stake, replaced alongside,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, with brass cap mkd.

$$T 6 S$$

$$R 13 W | R 12 W$$

$$S 12 | S 7$$

$$S 13 | S 18$$

1934

from which

A mesquite, 6 ins. diam., bears N. 83° E., 245 lks. dist., mkd. T 6 S R 12 W S 7 B T.

A mesquite, 11 ins. diam., bears S. $7\frac{1}{2}^{\circ}$ W., 129 lks. dist., mkd. T 6 S R 13 W S 13 B T.

A mesquite, 6 ins. diam., bears N. 33° W., 96 lks. dist., mkd. T 6 S R 13 W S 12 B T.

No tree available in sec. 18.

Stone not available for mound, and pit impracticable.

Land, level.

Soil, sandy loam, 2d rate.

Timber, palo verde and mesquite; undergrowth, greasewood, ~~sage-and-cacti.~~

Resurvey of the W. bdy. of T.6 S., R.12 W.

chains

N. 0°05' E., on true line on W. bdy. of sec. 7.

Over level land, thru scattered timber and dense undergrowth.

40.26 The true position of the $\frac{1}{4}$ sec. cor., determined from an original bearing tree.Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with small jelly glass deposited alongside, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
$$\begin{array}{c} \frac{1}{4} \\ \text{S } 12 | \text{S } 7 \\ 1934 \end{array}$$

from which

An original bearing tree

A mesquite, 9 ins. diam., bears S. 35° W., 87 lks. dist., showing faint marks.

A new bearing tree

A mesquite, 4 ins. diam., bears S. 33 $\frac{1}{2}$ ° W., 102 lks. dist., mkd. B T.

Thence

North, on true line on E. bdy. of sec. 7.

40.16 The cor. of secs. 1, 6, 7 and 12, which is a mesquite stake, 4 ins. diam., 1 in. above ground in mound of earth.

In place of the stake, reset alongside,

Set an iron post, 3 ft. long, 2 in. diam., 27 ins. in the ground, for cor. of secs. 1, 6, 7 and 12, with brass cap mkd.

$$\begin{array}{c} \text{T } 6 \text{ S} \\ \text{R } 13 \text{ W } | \text{R } 12 \text{ W} \\ \text{S } 1 \text{ S } 6 \\ \hline \text{S } 12 | \text{S } 7 \\ 1934 \end{array}$$

18x18x12 ins., in each sec., 3 ft. dist.

dig pits,

Land, level.

Soil, sandy, 2d rate.

Timber, palo verde, ironwood and mesquite; undergrowth, greasewood, sage and cacti.

N. 0°05' W., on true line on W. bdy. of sec. 6.

Over level land, thru scattered timber and dense undergrowth.

6.00 Graded Highway Yuma to Phoenix, bears N. 62°14' E. and S. 62°14' W.

6.60 Railroad guard fence, same bearing.

Resurvey of the W. bdy. of T.6 S., R.12 W.

BOOK 4076

chains

- 6.73 Telephone line, same bearing.
 7.45 Southern Pacific Railroad track, same bearing.
 8.75 Telephone line, same bearing.
 9.51 Railroad guard fence, same bearing.
 40.86 Proportional distance.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with pop bottle deposited alongside, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
 S 1 | S 6
 1934

18x18x12 ins., N. and S. of cor., 3 ft. dist.

dig pits,

- 82.61 The original closing cor. of T.6 S., Rs.12 and 13 W., which is the point of a decayed stake in mound of earth.

- 82.65 Intersect the 1st Stan. Par. S., and

Set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in the ground, for closing cor. of T.6 S., Rs.12 and 13 W., with brass cap mkd.

T 5 S R 12 W
 S 31

 C C
 S 1 | S 6
 R 13 W | R 12 W
 T 6 S
 1934

18x18x12 ins., N., E. and W. of post, 3 ft. dist.

dig pits,

From this closing cor., the standard $\frac{1}{4}$ sec. cor. of sec. 31, bears N. $89^{\circ}54'$ E., 24.18 chs. dist., described in the field notes of the 1st Stan. Par. S., thru Rs.9, 10, 11 and 12 W., resurveyed under this group.

Also from this closing cor., the standard cor. of T.5 S., Rs.12 and 13 W., bears S. $89^{\circ}54'$ W., 15.90 chs. dist., also described in field notes of the 1st Stan. Par. S., thru Rs.9, 10, 11 and 12 W., resurveyed under this group.

Land, level.

Soil, sand and clay, 2d rate.

Timber, palo verde and ironwood; undergrowth, greasewood, sage and cacti.

 Resurvey of the E. bdy. of T.5 S., R.9 W.,
 superseding the survey by T. F. White in 1877.

From the standard cor. of T.5 S., Rs.8 and 9 W.,

Resurvey of the E. bdy. of T.5 S., R.9 W.

chains

North, on a random line on the E. bdy. of T.5 S., R.9 W.

- 43.57 A point 0.50 chs. E. of the $\frac{1}{4}$ sec. cor. of secs. 31 and 36.
- 83.79 A point 0.50 chs. E. of the cor. of secs. 25, 30, 31 and 36.
- 124.52 A point 0.43 chs. E. of the $\frac{1}{4}$ sec. cor. of secs. 25 and 30.
- 165.21 A point 0.50 chs. E. of the cor. of secs. 19, 24, 25 and 30.
- 205.90 A point 0.53 chs. E. of the $\frac{1}{4}$ sec. cor. of secs. 19 and 24.
- 246.90 A point 0.62 chs. E. of the cor. of secs. 13, 18, 19 and 24.
- 287.14 A point 0.69 chs. E. of the $\frac{1}{4}$ sec. cor. of secs. 13 and 18.
- 327.34 A point 0.78 chs. E. of the cor. of secs. 7, 12, 13 and 18.
- 367.27 A point 0.88 chs. E. of the $\frac{1}{4}$ sec. cor. of secs. 7 and 12.
- 398.17 Find no evidence of the meander cor. on S. bank of Gila River bet. secs. 7 and 12.
Set temp. cor.
- 405.73 Find no evidence of the meander cor. on N. bank of Gila River bet. secs. 7 and 12.
Set temp. cor.
- 407.27 Set temp. cor. at record distance from cor. of secs. 1, 6, 7 and 12.
- 423.27 Find no evidence of the witness cor. to secs. 1, 6, 7 and 12.
Set temp. cor.
- 447.27 Find no trace of the $\frac{1}{4}$ sec. cor. of secs. 1 and 6.
- 487.81 A point 1.16 chs. E. of the cor. of Ts.4 and 5 S., R.9 W.

Return to the standard cor. of T.5 S., Rs.8 and 9 W., described in the field notes of the resurvey of the 1st Stan. Par. S., thru Rs.9, 10, 11 and 12 W., resurveyed under this group.

Thence

N. $0^{\circ}43'$ W., on true line on E. bdy. of sec. 36.

Over nearly level land, thru scattered undergrowth.

- 43.57 The $\frac{1}{4}$ sec. cor., which is a decayed stake in mound of earth.

In place of the stake,

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock with deposit of broken glass at base of post, and supported in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

Resurvey of the E. bdy. of T.5 S., R.9 W.

BOOK 4079

chains

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 36 \mid \text{S } 31 \\ 1934 \end{array}$$

No accessories.

Thence

North, on true line on E. bdy. of sec. 36.

40.22 The cor. of secs. 25, 30, 31 and 36, which is a decayed stake in mound of stone, with bearing trees as noted in the official record, but found lying on ground.

In place of the stake,

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to solid rock with deposit of broken glass at base of post, and supported in a mound of stone to top, for the cor. of secs. 25, 30, 31 and 36, with brass cap mkd.

$$\begin{array}{c} \text{T } 5 \text{ S} \\ \text{R } 9 \text{ W } \mid \text{R } 8 \text{ W} \\ \text{S } 25 \mid \text{S } 30 \\ \hline \text{S } 36 \mid \text{S } 31 \\ 1934 \end{array}$$

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. raise a mound

Land, level.

Soil, sand and stone, 3d rate.

Timber, palo verde and mesquite; undergrowth, greasewood, sage, cacti and ocatilla.

N. $0^{\circ}06'$ E., on true line on E. bdy. of sec. 25.

Over level land, thru scattered timber and undergrowth.

40.73 The $\frac{1}{4}$ sec. cor., which is a decayed stake in old mound of earth.

In place of the stake,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 25 \mid \text{S } 30 \\ 1934 \end{array}$$

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. raise a mound

Thence

N. $0^{\circ}06'$ W., on true line on E. bdy. of sec. 25, over land gradually changing from level to rolling.

40.69 The cor. of secs. 19, 24, 25 and 30, which is a decayed stake in old mound of stone, with an original bearing tree lying on the ground SE. of corner.

Resurvey of the E. bdy. of T.5 S., R.9 W.

chains

In place of the stake,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 19, 24, 25 and 30, with brass cap mkd.

T 5 S	
R 9 W	R 8 W
S 24	S 19
S 25	S 30

1934

raise a mound
of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, level.

Soil, sand and rock, 3d rate.

Timber, palo verde; undergrowth, greasewood, cacti and sage.

N. 0°02' W., on true line on E. bdy. of sec. 24.

Over rolling land, entering breaks to river thru scattered timber and dense undergrowth.

6.00 Dry wash, 60 lks. wide, course E.

40.69 The ¼ sec. cor., which is a weather worn stake in old mound of stone.

In place of the stake, reset alongside,

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock, with deposit of broken glass at base of post, and in a mound of stone to top, for ¼ sec. cor., with brass cap mkd.

¼	
S 24	S 19
1934	

No accessories.

Thence

N. 0°08' W., on true line on E. bdy. of sec. 24.

9.80 A dry wash, 120 lks. wide, course NW., asc. 65 ft. to

17.20 Mesa, bears NW. and SE.

36.00 Dry wash, 60 lks. wide, course W.

41.00 The cor. of secs. 13, 18, 19 and 24, which is the decayed point of an old stake in mound of stone, with an original bearing tree lying on the ground NE. of cor.

In place of the point of stake,

Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to solid rock, with deposit of broken glass at base of post, and supported in a mound of stone to top, for

Resurvey of the E. bdy. of T.5 S., R.9 W.

BOOK 4079

chains

cor. of secs. 13, 18, 19 and 24, with brass cap mkd.

T 5 S	
R 9 W	R 8 W
S 13	S 18
S 24	S 19
1934	

No accessories.

Land, broken and rolling.

Soil, sand and rock, 3d and 4th rate.

Timber, palo verde; undergrowth, greasewood, sage, cacti and ocatilla.

N. 0°06' W., on true line on E. bdy. of sec. 13.

Over rolling broken land, thru scattered timber and undergrowth.

40.24 The true point for the $\frac{1}{4}$ sec. cor., determined from the bearing trees.Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$	
S 13	S 18
1934	

from which

The original bearing trees

An ironwood, 10 ins. diam., bears N. 44 $\frac{3}{4}$ ° E., 60 lks. dist., mkd. $\frac{1}{4}$ S 18 B T.An ironwood, 10 ins. diam., bears N. 12 $\frac{1}{4}$ ° E., 73 lks. dist., not remarked.

A new bearing tree

A palo verde, 6 ins. diam., bears S. 70 $\frac{1}{2}$ ° W., 96 lks. dist., mkd. $\frac{1}{4}$ S 13 B T.

Thence

N. 0°08' W., on true line on E. bdy. of sec. 13.

34.95 A dry wash, 75 lks. wide, course W.

40.20 The cor. of secs. 7, 12, 13 and 18, which is a decayed stake in old mound of stone.

In place of the stake,

Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground to solid rock, with deposit of broken glass at base of post, and well supported in a mound of stone on top, for cor. of secs. 7, 12, 13 and 18, with brass cap mkd.

Resurvey of the E. bdy. of T.5 S., R.9 W.

chains

T 5 S	
R 9 W	R 8 W
S 12	S 7
S 13	S 18
1934	

No accessories.

Land, broken and rolling.

Soil, sand and rock, 3d and 4th rate.

Timber, palo verde, ironwood and mesquite; undergrowth, greasewood, sage and cacti.

N. 0°09' W., on true line on E. bdy. of sec. 12.

Over broken land, thru scattered timber and dense undergrowth.

- 5.50 Dry gulch, 1 ch. wide, 70 ft. deep, course W.
- 14.40 Dry gulch, 2½ chs. wide, 65 ft. deep, course W.
- 31.50 Old road, bears E. and W.
- 39.93 The ¼ sec. cor., which is an old weather worn stake, 3 ins. diam., 8 ins. above ground in mound of earth.
- In place of the stake, reset alongside,
- Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor., with brass cap mkd.

¼	
S 12	S 7
1934	

from which

The original bearing tree

A palo verde, bears S. 3° W., 257 lks. dist.

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Thence

N. 0°08' W., on true line on E. bdy. of sec. 12.

- 18.80 A dry gulch, .50 lks. wide, 115 ft. deep, course W.
- 28.75 Enter river bottom, bears NE. and SW.
- 37.25 S. bank of present channel of Gila River, 50 lks. wide, 10 ins. deep, course SW.
- 40.18 Proportional dist. for cor. of secs. 1, 6, 7 and 12, falls in dry bed of the river, impracticable to establish.
- Witness cor. established on line bet. secs. 1 and 6.
- Land, broken and level.

Resurvey of the E. bdy. of T.5 S., R.9 W.

BOOK 4079

chains

Soil, sand and rock on upland, 4th rate; sand and gravel on river bottom, 3d rate.
 Timber, palo verde, ironwood and mesquite; undergrowth, greasewood, mesquite, sage and arrowweed.

 N. 0°08' W., on true line on E. bdy. of sec. 1.

Over level river bottom, thru scattered timber and dense undergrowth.

- 2.89 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with 8 oz. bottle deposited alongside post, for a witness cor. to the true point for cor. of secs. 1, 6, 7 and 12, with brass cap mkd.

T 5 S	
R 9 W	R 8 W
S 1	S 6
S 12	S 7
W C	

1934

18x18x12 ins., NE., SE., SW. and NW. of post, 3 ft. dist. dig pits,

- 40.18 Proportional dist. for $\frac{1}{4}$ sec. cor., falls on side of a 4 ft. bank in unsafe position for establishment.

- 40.23 A fence bears E. and W., 29 lks. to fence cor. of fences bearing E. and NW.

- 40.28 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with small bottle deposited alongside, for witness cor. to the true position for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$	
S 1	S 6
W C	

1934

18x18x12 ins., N. and S. of post, 3 ft. dist. dig pits,

- 40.37 A fence, bears N. 67 $\frac{3}{4}$ ° E. and S. 67 $\frac{3}{4}$ ° W.

- 45.25 Enter dense mesquite thicket.

- 50.25 Leave dense mesquite thicket.

- 51.40 Enter cultivated field, bears E. and W.

- 64.35 Fence, bears E. and W., leave field.

- 64.36 The closing cor. of Ts.4 and 5 S., R.8 W., which is an iron post, 3 ins. diam., 8 ins. above ground, with brass cap mkd.

Resurvey of the E. bdy. of T.5 S., R.9 W.

chains

T 4 S	
R 9 W	T 4 S
S 36	R 8 W
S 1	C S 31
R 9 W	C S 6
T 5 S	T 5 S
	R 8 W

1910

I alter the marks to

	T 4 S
	R 8 W
S 1	C S 31
R 9 W	C S 6
T 5 S	T 5 S
	R 8 W

1910

- 64.53 A dry ditch, bears E. and W.
- 65.14 An old road, bears E. and W.
- 80.36 The cor. of Ts. 4 and 5 S., R. 9 W., which is an iron post, 3 ins. diam., 10 ins. above ground, with brass cap marked and witnessed as described in the official record.

I alter the marks to

T 4 S	
R 9 W	T 4 S
S 36	R 8 W
S 1	S 31
R 9 W	
T 5 S	

1910

Land, level.
Soil, sandy loam, 2d and 3d rate.
Timber, mesquite; undergrowth, mesquite and arrowweed.

Resurvey of the W. bdy. of T.5 S., R.9 W.,
superseding the survey by T. F. White in 1877.

From the standard cor. of T.5 S., Rs. 9 and 10 W., described in the field notes of the 1st Stan. Par. S., thru Rs. 9, 10, 11 and 12 resurveyed under this group.

North, on a random line on W. bdy. of T.5 S., R.12 W.

- 41.20 A point 0.15 chs. E. of the $\frac{1}{2}$ sec. cor. bet. secs. 31 and 36.

Resurvey of the W. bdy. of T.5 S., R.9 W.

BOOK 4079

chains	
82.39	A point 0.21 chs. E. of the cor. of secs. 25, 30, 31 and 36.
123.06	A point 0.28 chs. E. of the $\frac{1}{4}$ sec. cor. of secs. 25 and 30.
163.81	A point 0.31 chs. E. of the cor. of secs. 19, 24, 25 and 30.
204.48	A point 0.31 chs. E. of the $\frac{1}{4}$ sec. cor. of secs. 19 and 24.
245.09	A point 0.38 chs. E. of the cor. of secs. 13, 18, 19 and 24.
285.27	A point 0.43 chs. E. of the $\frac{1}{4}$ sec. cor. of secs. 13 and 18.
325.27	Find no evidence of the cor. of secs. 7, 12, 13 and 18. Set temp. cor.
345.00	Find no evidence of the meander cor. at original record. Set temp. cor.
352.60	Find no evidence of the meander cor. at original record. Set temp. cor.
365.27	Find no evidence of the $\frac{1}{4}$ sec. cor. bet. secs. 7 and 12. Set temp. cor.
406.54	A point 1.72 chs. E. of the cor. of secs. 1, 6, 7 and 12.
446.43	A point 1.25 chs. E. of the $\frac{1}{4}$ sec. cor. of secs. 1 and 6.
486.62	A point 1.40 chs. E. of the cor. of Ts. 4 and 5 S., Rs. 9 and 10 W.

Return to the standard cor. of T.5 S., Rs.9 and 10 W.

Thence

N. 0°13' W., on true line on W. bdy. of sec. 31.

Over nearly level land, thru scattered timber and undergrowth.

41.20 The $\frac{1}{4}$ sec. cor., which is the decayed point of a stake in old mound of earth.

In place of the old stake,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
S 36 | S 31

1934

from which

The original bearing tree

A palo verde, bears S. 67 $\frac{1}{2}$ ° E., 256 lks. dist., mkd.
 $\frac{1}{4}$ S.

Resurvey of the W. bdy. of T.5 S., R.9 W.

chains

And new bearing trees

A palo verde, bears S. 66° E., 260 lks. dist., mkd. $\frac{1}{4}$
S 31 B T.

A palo verde, bears N. $14\frac{1}{2}^{\circ}$ W., 385 lks. dist., mkd. $\frac{1}{4}$
S 36 B T.

Thence

N. $0^{\circ}05'$ W., on true line on W. bdy. of sec. 31

41.19 The cor. of secs. 25, 30, 31 and 36, which is the decayed
point of stake in old mound of earth.

In place of the stake,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the
ground, for cor. of secs. 25, 30, 31 and 36, with brass
cap mkd.

T 5 S	
R 10 W	R 9 W
S 25	S 30
S 36	S 31

1934

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. raise a mound

Land, level.

Soil, sand and rock, 3d and 4th rate.

Timber, palo verde and mesquite; undergrowth, greasewood,
sage and cacti.N. $0^{\circ}06'$ W., on true line on W. bdy. of sec. 30.Over nearly level desert land, thru scattered timber and
undergrowth.

40.67 The $\frac{1}{4}$ sec. cor., which is a weather worn stake in old
mound of stone.

In place of the old stake, reset alongside,

Set an iron post, 3 ft. long, 1 in. diam., 4 ins. in the
ground to bedrock, and supported in a mound of stone to
top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
S 25 S 30

1934

from which

The original bearing trees

A palo verde, bears N. 87° E., 98 lks. dist., faint
scribe marks.

A palo verde, bears S. 13° E., 157 lks. dist., faint
scribe marks.

And new bearing trees

Resurvey of the W. bdy. of T. 5 S., R. 9 W.

BOOK 4079

chains

A palo verde, bears N. $39\frac{1}{2}^{\circ}$ E., 336 lks. dist., mkd.
 $\frac{1}{4}$ S 30 B T.

A palo verde, bears N. $43\frac{1}{2}^{\circ}$ W., 294 lks. dist., mkd.
 $\frac{1}{4}$ S 25 B T.

Thence

N. $0^{\circ}03'$ W., on true line on W. bdy. of sec. 30.

38.00 Descend 60 ft. to sec. cor. on N. face of bluff.

40.75 The cor. of secs. 19, 24, 25 and 30, which is a weather worn stake in old mound of stone.

In place of the stake, reset alongside,

Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in the ground to solid ledge, supported in a mound of stone to top, for cor. of secs. 19, 24, 25 and 30, with brass cap mkd.

T 5 S	
R 10 W	R 9 W
S 24	S 19

S 25	S 30

1934

from which

The original bearing trees

A palo verde, bears N. $49\frac{1}{2}^{\circ}$ E., 272 lks. dist., old scribe marks visible.

A palo verde, bears N. $58\frac{1}{2}^{\circ}$ W., 230 lks. dist., old scribe marks visible.

Raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, level and hilly.

Soil, sand and stone, 3d and 4th rate.

Timber, palo verde and mesquite; undergrowth, greasewood, sage and cacti.

 North, on true line on W. bdy. of sec. 19.

Over hillside, thru scattered timber and dense undergrowth.

Descend 35 ft. to

5.00 Enter Mesa land, bears E. and W.

38.45 A dry wash, 60 lks. wide, shallow, course W.

40.67 The $\frac{1}{4}$ sec. cor. which is a weather worn stake, 4 ins. diam., 14 ins. above ground in mound of earth.


In place of the stake, reset alongside,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

BOOK 4079

Resurvey of the W. bdy. of T.5 S., R.9 W.

chains



from which

The original bearing trees

A mesquite tree, 5 ins. diam., bears W., 10 lks. dist., faintly marked.

A mesquite stump, bears E., 4 lks. dist., faintly marked.

And new bearing trees

A mesquite, 9 ins. diam., bears S. 69° W., 164 lks. dist., mkd. $\frac{1}{4}$ S 24 B T.

A mesquite, 7 ins. diam., bears S. 27 $\frac{1}{2}$ ° E., 86 lks. dist., mkd. $\frac{1}{4}$ S 19 B T.

Thence


N. 0°06' W., on true line on W. bdy. of sec. 19.

3.85 A dry wash, 45 lks. wide, shallow, course W.

40.61 The cor. of secs. 13, 18, 19 and 24, which is an old stake showing faint scribe marks alongside a stake set by the Colorado River Commission.

In place of the above old stake, with both stakes reset alongside,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 13, 18, 19 and 24, with brass cap mkd.



1934

18x18x12 ins. in each sec., 3 ft. dist.

dig pits.

Land, hilly and level.

Soil, sand and rock, 2d, 3rd and 4th rate.

Timber, mesquite and palo verde; undergrowth, greasewood, sage, cacti and mesquite.

N. 0°04' W., on true line on W. bdy. of sec. 18.

Over level land, thru scattered timber and dense undergrowth.

30.10 Dry wash, 30 lks. wide, course W.

30.50 Enter rolling sand hills.

Resurvey of the W. bdy. of T.5 S., R.9 W.

BOOK 4079

chains

40.18

The $\frac{1}{4}$ sec. cor. which is a weather worn stake in a mound of stone.

In place of the stake, reset alongside,

Set an iron post, 3 ft. long, 1 in. diam., 3 ins. in the ground to solid rock, and supported in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 13 \text{ | S } 18 \\ 1934 \end{array}$$

from which

The original bearing trees

A palo verde stump, bears N. $39\frac{1}{2}^{\circ}$ E., 90 lks. dist.

A palo verde tree, bears S. 66° W., 164 lks. dist., with old blaze facing cor.

And new bearing trees

A palo verde, 8 ins. diam., bears N. 74° E., 74 lks. dist., mkd. $\frac{1}{4}$ S 18 B T.

A palo verde, 7 ins. diam., bears S. 66° W., 164 lks. dist., mkd. $\frac{1}{4}$ S 13 B T.

Thence

N. $0^{\circ}37'$ W., on true line on W. bdy. of sec. 18.

1.30 Dry wash, course W.

28.60 Enter lava rock on top of bluff with 3 channels in rock, about 5 ft. apart, 20 ft. deep, 2 ft. wide, with walls covered with Indian drawings.

29.50 Lava rim, descend 125 ft. to river bottom.

30.82 Base of a perpendicular cliff 83 ft. high, at a point 70 lks. E. of a rock 10x8x4 ft., used as matate to grind grain.

32.78 Enter old river bed, now dry, at ancient water hole.

40.42 Proportional distance.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with pint beer bottle deposited alongside, for the cor. of secs. 7, 12, 13 and 18, with brass cap mkd.

$$\begin{array}{c} \text{T } 5 \text{ S} \\ \text{R } 10 \text{ W | R } 9 \text{ W} \\ \text{S } 12 \text{ | S } 7 \\ \hline \text{S } 13 \text{ | S } 18 \\ 1934 \end{array}$$

No trees or stone for mound available and pits impracticable.

Resurvey of the W. bdy. of T.5 S., R.9 W.

chains

Land, level and hilly.
Soil, sand and sand-rock, 2d and 3d rate.
Timber, palo verde and mesquite; undergrowth, mesquite,
greasewood and sage.

N. 0°37' W., on true line on W. bdy. of sec. 7.

Over level river bed, numerous dry river channels, general
course SW., thru scattered timber and undergrowth.

- 40.42 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the
ground with small bottle deposited alongside, for $\frac{1}{4}$ sec.
cor., with brass cap mkd.

$\frac{1}{4}$
 S 12 | S 7
 1934

from which

A palo verde, 10 ins. diam., bears N. 61 $\frac{1}{2}$ ° E., 91 lks.
dist., mkd. $\frac{1}{4}$ S 7 B T.

A palo verde, 9 ins. diam., bears N. 12 $\frac{1}{4}$ ° W., 121 lks.
dist., mkd. $\frac{1}{4}$ S 12 B T.

- 80.08 Road, bears E. and W.

- 80.85 The cor. of secs. 1, 6, 7 and 12, which is the decayed
point of stake in old mound of earth.

At point of stake,

Set an iron post, 3 ft. long; 2 ins. diam., 27 ins. in the
ground, for cor. of secs. 1, 6, 7 and 12, with brass cap
mkd.

T 5 S
 R 10 W | R 9 W
 S 1 S 6

 S 12 | S 7
 1934

18x18x12 ins., in each sec., 3 ft. dist.

dig pits,

Land, level.

Soil, sand and loam, 2d and 3d rate.

Timber, cottonwood, palo verde and mesquite; undergrowth,
arrowweed, mesquite and sage.

N. 0°40' E., on true line on W. bdy. of sec. 6.

Over level bottom land, thru scattered timber and dense
undergrowth.

Land gradually changing from bottom to upland,

- 39.89 The $\frac{1}{4}$ sec. cor. which is an old stake, 4 ins. diam., 8 ins.
above ground in mound of earth.

Resurvey of the W. bdy. of T.5 S., R.9 W.

BOOK 4079

chains

In place of the stake, reset alongside,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\frac{1}{4}$$

$$S 1 | S 6$$

1934

from which

A mesquite, 5 ins. diam., bears N. $76\frac{1}{4}^{\circ}$ E., 223 lks. dist., mkd. $\frac{1}{4}$ S 6 B T.

No additional accessory.

Thence

N. $0^{\circ}13'$ W., on true line on W. bdy. of sec. 6.

40.19 The cor. of Ts.4 and 5 S., Rs.9 and 10 W., which is an iron post, 3 ins. diam., 10 ins. above ground, with brass cap mkd. and witnessed as described in the official record.

Land, level and rolling.

Soil, sand, 2d and 3d rate.

Timber, mesquite, palo verde and ironwood; undergrowth, same, also greasewood, sage and cacti.

Resurvey of the W. bdy. of T.5 S., R.10 W.,
superseding the survey by T. F. White in 1877.

From the standard cor. of T.5 S., Rs.10 and 11 W., described in the field notes of the 1st Stan. Par. S., resurveyed under this group.

North, on a random line along the W. bdy. of T.5 S., R.10 W.

40.00 Find no evidence of the $\frac{1}{4}$ sec. cor. of secs. 31 and 36.
Set temp. cor.

57.58 Find no evidence of the record meander cor. on S. bank of Gila River.
Set temp. cor.

64.39 Find no evidence of the record meander cor. on N. bank of Gila River.
Set temp. cor.

80.00 Find no evidence of the cor. of secs. 25, 30, 31 and 36.
Set temp. cor.

120.00 Find no evidence of the $\frac{1}{4}$ sec. cor. of secs. 25 and 30.
Set temp. cor.

160.00 Find no evidence of the cor. of secs. 19, 24, 25 and 30.
Set temp. cor.

200.00 Find no evidence of the $\frac{1}{4}$ sec. cor. of secs. 19 and 24.
Set temp. cor.

Resurvey of the W. bdy. of T.5 S., R.10 W.

chains

- 240.82 A point 1.19 chs. E. of the cor. of secs. 13, 18, 19 and 24.
- 280.82 Find no evidence of the $\frac{1}{4}$ sec. cor. of secs. 13 and 18. Set temp. cor.
- 321.59 A point 1.21 chs. E. of the cor. of secs. 7, 12, 13 and 18.
- 361.92 A point 1.34 chs. E. of the $\frac{1}{4}$ sec. cor. of secs. 7 and 12.
- 401.94 A point 1.54 chs. E. of the cor. of secs. 1, 6, 7 and 12.
- 442.20 A point 1.57 chs. E. of the $\frac{1}{4}$ sec. cor. of secs. 1 and 6.
- 482.40 A point 1.73 chs. E. of the cor. of T.5 S., Rs.10 and 11 W.

Return to the standard cor. of T.5 S., Rs.10 and 11 W.

Thence

N. 0°12' W., on true line on W. bdy. of sec. 31.

Over level river bottom, thru scattered timber and dense undergrowth.

- 40.14 Proportional distance.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with pint beer bottle deposited alongside post, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
S 36 | S 31

1934

18x18x12 ins., N. and S. of post, 3 ft. dist.

dig pits,

- 47.50 S. bank of present channel of Gila River, course SW. Dry.

- 49.00 N. bank of present channel of Gila River, course SW.

Continue over old river bed.

- 80.28 Proportional distance.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with pint beer bottle deposited alongside post, for cor. of secs. 25, 30, 31 and 36, with brass cap mkd.

T 5 S

R 11 W | R 10 W

S 25 | S 30

S 36 | S 31

1934

No trees of sufficient size for bearing trees or stone available for mound, and pits impracticable.

Resurvey of the W. bdy. of T.5 S., R.10 W.

BOOK 4079

chains

Land, level.
Soil, sand and gravel, 3d rate.
Timber, mesquite and cottonwood; undergrowth, arrowweed
and willow.

N. 0°12' W., on true line on W. bdy. of sec. 30.

Over old river bed, thru scattered timber and dense under-
growth.

10.00 Leave river bed, continue over valley land.

20.20 Old fence bears E. and W., 50 lks. to the cor. of fences
bearing E. and N.

40.14 Proportional distance.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd:

$\frac{1}{4}$
S 25 | S 30

1934

from which

A mesquite, 8 ins. diam., bears S. 59 $\frac{1}{2}$ ° E., 220 lks.
dist., mkd. $\frac{1}{4}$ S 30 B T.

A mesquite, 5 ins. diam., bears N. 4 $\frac{1}{2}$ ° W., 118 lks.
dist., mkd. $\frac{1}{4}$ S 25 B T.

41.30 S. edge of a slough, water 1 ft. deep, course W.

43.70 S. side of an alkali island, bears E. and W.

46.50 N. side of the alkali island, bears E. and W.

47.30 N. edge of the slough, course W.

64.75 An irrigation ditch, 8 lks. wide, 2 ft. deep, course W.

65.05 Wire fence, bears E. and W.

73.69 Fence bears E. and W., 4 lks. to cor. of fences bearing
N., S. and E.

73.80 Ditch, 6 lks. wide, 3 ft. deep, course W.

80.23 Cor. of fences bearing S., W. and NE.

80.27 Proportional distance.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the
ground with pop bottle deposited alongside post, for cor.
of secs. 19, 24, 25 and 30, with brass cap mkd.

T 5 S
R 11 W | R 10 W
S 24 | S 19

S 25 | S 30

1934

dig pits.

Resurvey of the W. bdy. of T.5 S., R.10 W.

chains

18x18x12 ins., in each sec., 3 ft. dist.

Land, level.

Soil, sandy loam, 2d rate.

Timber, mesquite and cottonwood; undergrowth, arrowweed, willow and catclaw.


N. 0°12' W., on true line on W. bdy. of sec. 19.

Over level land, thru scattered timber and dense undergrowth.

5.95 Road, bears E. and W.

39.85 Road, bears E. and W.

40.14 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with small bottle deposited alongside post, for 1/4 sec. cor., with brass cap mkd.




raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

80.27 The cor. of secs. 13, 18, 19 and 24, which is the point of a decayed stake in old mound of earth.

In place of the stake,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 13, 18, 19 and 24, with brass cap mkd.



18x18x12 ins., in each sec., 3 ft. dist.

dig pits,

Land, level.

Soil, sandy loam, 1st and 2d rate.

Timber, palo verde and mesquite; undergrowth, greasewood and sage.

N. 0°01' W., on true line on W. bdy. of sec. 18.

Over nearly level land, thru scattered timber and dense undergrowth.

16.30 A dry wash, 25 lks. wide, 2 ft. deep, course SE.

40.38 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with pint beer bottle deposited alongside post, for 1/4 sec. cor., with brass cap mkd.

Resurvey of the W. bdy. of T.5 S., R.10 W.

BOOK 4079

chains

$$\begin{array}{c} \frac{1}{2} \\ \text{S } 13 \mid \text{S } 18 \end{array}$$

1934

raise a mound
of stone, 2 ft. base, 1½ ft. high, W. of cor.

42.65 A graded road bears S. 17° W. and N. 17° E., approximately
3 chs., then bends S. 51° E. to Agua Caliente.

58.50 Leave level desert, enter hilly land; ascend S. slope 185
ft.

72.00 Spur slopes SW.

75.25 Top of hill bears E. and W., about 10 chs. to saddle.

Descend 135 ft. to sec. cor.

80.77 The cor. of secs. 7, 12, 13 and 18, which is an old mound
of stone with decayed stake lying on top.

In old mound of stone,

Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the
ground to solid ledge, and in a mound of stone to top,
for cor. of secs. 7, 12, 13 and 18, with brass cap mkd.

$$\begin{array}{c} \text{T } 5 \text{ S} \\ \text{R } 11 \text{ W} \mid \text{R } 10 \text{ W} \\ \text{S } 12 \mid \text{S } 7 \\ \hline \text{S } 13 \mid \text{S } 18 \end{array}$$

1934

from which

The original bearing trees

A palo verde stump, bears N. 71° E., 166 lks. dist.,
faint scribe marks.

A palo verde stump, bears S. 73¼° E., 102 lks. dist.,
no marks.

Raise a mound of stone, 4 ft. base, 2½ ft. high, W. of
cor.

Land, level and hilly.

Soil, sandy, sand and rock, 2d and 4th rate.

Timber, palo verde and mesquite, undergrowth, greasewood,
sage, ocatilla and cacti.

N. 0°11' W., on true line on W. bdy. of sec. 7.

Over hilly land, thru scattered timber and dense under-
growth.

Descend 25 ft. to desert floor.

3.80 Leave hilly land, bears E. and SW., enter level desert.

15.80 Road, bears E. and W.

16.30 Fence, bears E. and W.

Resurvey of the W. bdy. of T.5 S., R.10 W.

chains

20.00 Ranch house, bears E., 2.50 chs. dist.

21.48 Fence, bears E. and W.

40.33 The $\frac{1}{4}$ sec. cor., which is a mound of stone.

In mound of stone,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
$$\begin{array}{c} \frac{1}{4} \\ \text{S } 12 \mid \text{S } 7 \\ 1934 \end{array}$$

from which

The original bearing tree

An ironwood, 7 ins. diam., bears S. $36\frac{1}{2}^{\circ}$ W., 120 lks. dist., blazed towards cor.Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Thence

N. $0^{\circ}17'$ W., on true line on W. bdy. of sec. 7.

13.15 Road, bears NW. and SE.

40.02 The cor. of secs. 1, 6, 7 and 12, which is an old mound of stone.

In the mound of stone,

Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the ground to bedrock, and with $\frac{1}{2}$ pint bottle deposited alongside post supported in a mound of stone to top, for cor. of secs. 1, 6, 7 and 12, with brass cap mkd.
$$\begin{array}{c} \text{T } 5 \text{ S} \\ \text{R } 11 \text{ W} \mid \text{R } 10 \text{ W} \\ \text{S } 1 \mid \text{S } 6 \\ \hline \text{S } 12 \mid \text{S } 7 \\ 1934 \end{array}$$
of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. raise a mound

Land, hilly and level.

Soil, stone, sand and sandy, 3d and 4th rate.

Timber, ironwood and palo verde; undergrowth, greasewood, sage and cacti.

N. $0^{\circ}02'$ W., on true line on W. bdy. of sec. 6.

Over level land, thru scattered timber and dense undergrowth.

27.20 Graded road bears NE. and SW., at a point 23 lks. W. of road from S.

30.04 Railroad fence, bears N. 61° E. and S. 61° W.

Resurvey of the W. bdy. of T.5 S., R.10 W.

BOOK 4079

chains

- 30.20 Telegraph and telephone line, same bearing.
- 30.90 Southern Pacific Railroad track, same bearing.
- 32.20 Telephone line, same bearing.
- 32.59 Railroad fence, same bearing.
- 40.26 The $\frac{1}{4}$ sec. cor., which is a stake, 2 ins. diam., 1 ft. above ground in a mound of earth.
- In place of the stake, reset alongside,
- Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
- $\frac{1}{4}$
S 1 | S 6
1934
- 18x18x12 ins., N. and S. of post, 3 ft. dist. dig pits,
- Thence
- N. 0°15' W., on true line on W. bdy. of sec. 6.
- 40.20 The cor. of Ts.4 and 5 S., Rs.10 and 11 W., which is an iron post, 3 ins. diam., 9 ins. above ground, with brass cap mkd. and witnessed as described in the official record.
- Land, level.
Soil, sandy loam, 2d rate.
Timber, palo verde and ironwood; undergrowth, greasewood, sage and cacti.
-
- Resurvey of the W. bdy. of T.5 S., R.11 W.,
superseding the survey by T. F. White in 1877.
-
- Begin at the standard cor. of T.5 S., Rs.11 and 12 W., described in the field notes of the 1st Stan. Par. S., thru Rs.9, 10, 11 and 12 W., resurveyed under this group.
- Thence
- North, on a random line on W. bdy. of T.5 S., R.11 W.
- 40.00 Find no evidence of the $\frac{1}{4}$ sec. cor. bet. secs. 31 and 36. Set temp. cor.
- 79.54 A point 0.26 chs. E. of the cor. of secs. 25, 30, 31 and 36.
- 119.65 A point 0.35 chs. E. of the $\frac{1}{4}$ sec. cor. of secs. 25 and 30.
- 159.80 A point 0.48 chs. E. of the cor. of secs. 19, 24, 25 and 30.
- 199.93 A point 0.54 chs. E. of the $\frac{1}{4}$ sec. cor. of secs. 19 and 24.
- 240.06 A point 0.57 chs. E. of the cor. of secs. 13, 18, 19 and 24.
- 280.19 A point 0.61 chs. E. of the $\frac{1}{4}$ sec. cor. of secs. 13 and 18.

Resurvey of the W. bdy. of T.5 S., R.11 W.

chains

- 320.36 A point 0.63 chs. E. of the cor. of secs. 7, 12, 13. and 18.
- 360.53 A point 0.66 chs. E. of the $\frac{1}{4}$ sec. cor. of secs. 7 and 12.
- 400.65 A point 0.77 chs. E. of the cor. of secs. 1, 6, 7 and 12.
- 440.80 A point 0.82 chs. E. of the $\frac{1}{4}$ sec. cor. of secs. 1 and 6.
- 480.94 A point 0.91 chs. E. of the cor. of Ts.4 and 5 S., Rs.11 and 12 W.

Return to the standard cor. of T.5 S., Rs.11 and 12 W.

Thence

N. 0°11' W., on true line on W. bdy. of sec. 31.

Over level land, thru scattered timber and dense undergrowth.

- 6.35 A dry wash, 40 lks. wide, 6 ft. deep, course SW.
- 39.77 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with deposit of broken glass at base of post, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
 S 36 | S 31
 1934

No bearing trees or stone for mound available and pits impracticable.

50.00 A road, bears NW. and SE.

70.40 Road, bears NW: and SE.

79.54 The cor. of secs. 25, 30, 31 and 36, which is an old mound of earth with decayed stake on top.

In the old mound,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 25, 30, 31 and 36, with brass cap mkd.

T 5 S
 R 12 W | R 11 W
 S 25 | S 30

 S 36 | S 31
 1934

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. raise a mound

Land, level.

Soil, sandy loam and gravel, 3d rate.

Timber, palo verde, ironwood and mesquite; undergrowth, greasewood, sage, cacti and ocatilla.

Resurvey of the W. bdy. of T.5 S., R.11 W.

BOOK 4079

chains

N. $0^{\circ}08'$ W., on true line on W. bdy. of sec. 30.

Over level land, thru scattered timber and dense undergrowth.

40.11 The $\frac{1}{4}$ sec. cor., which is a stake, 4 ins. diam., 30 ins. above ground with distinct scribe marks.

In place of the stake, reset alongside,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor.; with brass cap mkd.
$$\begin{array}{c} \frac{1}{4} \\ \text{S } 25 \text{ | S } 30 \end{array}$$

1934

from which

The original bearing tree

A palo verde, bears N. $15\frac{3}{4}^{\circ}$ W., 267 lks. dist., shows scribe marks.Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Thence

N. $0^{\circ}11'$ W., on true line on W. bdy. of sec. 30.

28.50 A desert road, bears E. and W.

33.30 A dry wash. 60 lks. wide, 7 ft. deep, course SE.

40.15 The cor. of secs. 19, 24, 25 and 30, which is an old mound of earth with decayed stake lying on ground.

In mound of earth,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 19, 24, 25 and 30, with brass cap mkd.

$$\begin{array}{c} \text{T } 5 \text{ S} \\ \text{R } 12 \text{ W | R } 11 \text{ W} \\ \text{S } 24 \text{ | S } 19 \\ \hline \text{S } 25 \text{ | S } 30 \end{array}$$

1934

from which

The original bearing trees

A palo verde stump, bears N. $29\frac{1}{2}^{\circ}$ E., 185 lks. dist., old scribe marks plain.A palo verde stump, bears S. $67\frac{1}{2}^{\circ}$ E., 219 lks. dist., blazed.Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, level.

Soil, sandy loam and gravel, 3d rate.

Timber, palo verde, ironwood and mesquite; undergrowth,

Resurvey of the W. bdy. of T.5 S., R.11 W.

chains

greasewood, sage and cacti.

N. 0°05' W., on true line on W. bdy. of sec. 19.

Over level land, thru scattered timber and dense undergrowth.

- 9.80 A graded road, bears N. 61° E. and S. 61° W.
- 10.38 A guard fence, bears N. 61° E. and S. 61° W.
- 11.43 A telephone line, bears N. 61° E., and S. 61° W.
- 12.12 Southern Pacific Railroad track, bears N. 61° E. and S. 61° W.
- 13.39 Telegraph and telephone line, bears N. 61° E. and S. 61° W.
- 14.85 A guard fence, bears N. 61° E. and S. 61° W.
- 40.13 The $\frac{1}{4}$ sec. cor., which is the decayed point of old stake in mound of earth.

In place of the old stake,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
$$\begin{array}{c} \frac{1}{4} \\ \text{S } 24 \text{ | } \text{S } 19 \\ 1934 \end{array}$$

from which

The original bearing trees

A palo verde stump, bears N. 25 $\frac{1}{2}$ ° E., 76 lks. dist., scribe marks faint.An ironwood, bears S. 79° E., 75 lks. dist., mkd. distinctly $\frac{1}{4}$ S.

And new bearing trees

A palo verde, 14 ins. diam., bears S. 54 $\frac{1}{2}$ ° E., 97 lks. dist., mkd. $\frac{1}{4}$ S 19 B T.An ironwood, 18 ins. diam., bears S. 37 $\frac{1}{2}$ ° W., 226 lks. dist., mkd. $\frac{1}{4}$ S 24 B T.

Thence

N. 0°03' W., on true line on W. bdy. of sec. 19.

- 40.13 The cor. of secs. 13, 18, 19 and 24, which is the decayed point of a stake in old mound of earth.

At point of the old stake,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 13, 18, 19 and 24, with brass cap mkd.

Resurvey of the W. bdy. of T. 5 S., R. 11 W.

BOOK 4079

chains

T 5 S	
R 12 W	R 11 W
S 13	S 18
S 24	S 19

1934

from which

The original bearing tree

An ironwood, 6 ins. diam., bears S. $30\frac{1}{4}^{\circ}$ E., 124 lks. dist., mkd. T 5 S R 11 W S 19 B T.

Land, level.

Soil, sandy loam and stony, 2d and 3d rate.

Timber, palo verde and ironwood; undergrowth, greasewood, sage and cacti.

N. $0^{\circ}03'$ W., on true line on W. bdy. of sec. 18.

Over level land, thru scattered timber and dense undergrowth.

40.13 The $\frac{1}{4}$ sec. cor., which is the point of a decayed stake in mound of earth.

In place of the stake,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$	
S 13	S 18

1934

of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. raise a mound

Thence

N. $0^{\circ}02'$ W., on true line on W. bdy. of sec. 18.

23.20 A dry wash, 1 ch. wide, 6 ft. deep, course SE.

33.45 A dry wash, 40 lks. wide, 6 ft. deep, course S. 30° E.

40.17 The cor. of secs. 7, 12, 13 and 18, which is the decayed point of an stake in mound of earth.

At point of the decayed stake,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with cut glass sugar bowl deposited alongside post for cor. of secs. 7, 12, 13 and 18, with brass cap mkd.

T 5 S	
R 12 W	R 11 W
S 12	S 7
S 13	S 18

1934

Resurvey of the W. bdy. of T.5 S., R.11 W.

chains

from which

The original bearing trees

A palo verde, 8 ins. diam., bears S. 65° W., 87 lks. dist., old marks show.

A palo verde stump, bears N. 55° W., 212 lks. dist., blazed.

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, level.

Soil, sandy loam, 2d rate.

Timber, ironwood, palo verde and mesquite; undergrowth, greasewood, cacti, sage and tumble weed.

N. 0°03' W., on true line on W. bdy. of sec. 7.

Over level land, thru scattered timber and dense undergrowth.

23.00 Dry wash, 20 lks. wide, 6 ft. deep, course SE.

40.17 The ¼ sec. cor., which is the point of a decayed stake in mound of earth.

At the point of stake,

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, and supported in a mound of stone to top, for ¼ sec. cor., with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ S-12 | S 7 \end{array}$$

1934

from which

The original bearing trees

A palo verde stump, bears N. 14¼° E., 98 lks. dist., faintly marked.

A palo fierro, bears S. 72° E., 99 lks. dist., faintly marked.

Thence

N. 0°09' W., on true line on W. bdy. of sec. 7.

1.35 A dry wash, 16 lks. wide, 4 ft. deep, course SE.

22.00 A dry wash, 55 lks. wide, 7 ft. deep, course SE.

40.12 The cor. of secs. 1, 6, 7 and 12, which is an old mound of earth.

In center of old mound,

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 1, 6, 7 and 12, with brass cap mkd.

Resurvey of the W. bdy. of T.5 S., R.11 W.

BOOK 407C

chains

T 5 S	
R 12 W	R 11 W
S 1	S 6
S 12	S 7
1934	

from which

The original bearing trees

A palo verde, 7 ins. diam., bears N. $15\frac{1}{2}^{\circ}$ E., 232 lks. dist., faintly mkd.

A palo verde, 9 ins. diam., bears S. 54° E., 193 lks. dist., fully mkd.

And new bearing trees

A palo verde, 6 ins. diam., bears N. $40\frac{1}{2}^{\circ}$ E., 127 lks. dist., mkd. T 5 S R 11 W S 6 B T.

A palo verde, 8 ins. diam., bears S. $43\frac{1}{2}^{\circ}$ E., 339 lks. dist., mkd. T 5 S R 11 W S 7 B T.

Land, level.

Soil, sandy loam, 2d rate.

Timber, palo verde and ironwood; undergrowth, greasewood, mesquite and sage.

N. $0^{\circ}04'$ W., on true line on the W. bdy. of sec. 6.

Over level land, thru scattered timber and dense undergrowth.

40.15 The $\frac{1}{4}$ sec. cor., which is the point of a decayed stake in mound of earth.

In place of the stake,

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock, and supported in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$	
S 1	S 6
1934	

from which

The original bearing trees

A palo fierro, 8 ins. diam., bears S. 12° W., 52 lks. dist., marks distinct.

A palo fierro, 8 ins. diam., bears N. 67° W., 58 lks. dist., marks distinct.

And new bearing trees

A palo verde, 6 ins. diam., bears S. 45° E., 32 lks. dist., mkd. $\frac{1}{4}$ S 6 B T.

Resurvey of the W. bdy. of T.5 S., R.11 W.

chains

A palo fierro, 8 ins. diam., bears N. $68\frac{1}{4}^{\circ}$ W., 59 lks. dist., mkd. $\frac{1}{2}$ S 1 3 T.

Thence

N. $0^{\circ}08'$ W., on true line on W. bdy. of sec. 6.

40.14

The cor. of Ts.4 and 5 S., Rs.11 and 12 W., which is an iron post, 3 ins. diam., 10 ins. above ground, with brass cap marked and witnessed as described in the official record.

Land, level.

Soil, sand and stone, 2d and 3d rate.

Timber; ironwood and palo verde; undergrowth.

4-680
(August, 1926)

FIELD ASSISTANTS.

NAMES.	CAPACITY.
J.M.Champie	Principal Assistant.
A.R.Zent	Chainman.
Frank Burt	Flagman.
Jake Spillman	Flagman.
Paul Wolf	Field Assistant.
Murray Sloan	Field Assistant.
Harvey Samuels	Field Assistant.
I.B.Williams	Field Assistant.
Charles V.Garlock	Field Assistant.
Gordon Bates	Field Assistant.

86

148

BOOK 4079

CERTIFICATE OF UNITED STATES SURVEYOR

We, Daniel M. Wier, U.S. Transitman and Anthony C. Kimmell, U. S. Surveyor, hereby certify upon honor that, in pursuance

of special instructions received from the District Cadastral Engineer for Arizona

bearing date of the 15th day of February, 1934, we have well, faithfully, and truly

in our own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, resurveyed the E. and W. Bdrs. of T. 5 S., R. 9 W.; the W. Bdrs. of Ts. 5 S., Rs. 10 and 11 W.; the E. Bdrs. of Ts. 6 S., Rs. 10, 11 and 12 W.; the W. Bdy. of T. 6 S., R. 12 W.; the S. Bdrs. of Ts. 6 S., Rs. 11 and 12 W.; the W. and S. Bdrs. of Ts. 7 S., Rs. 11 and 12 W.; and a portion of the E. Bdy. of T. 7 S., R. 11 W.

of the Gila and Salt River Meridian, in the State of Arizona, which are represented in

the foregoing field notes as having been executed by us and under our direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Arizona

and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

For signature of Daniel M. Wier, see the attached certificate

Anthony C. Kimmell, U. S. Surveyor, Sentinel, Arizona, March 26, 1934.

APPROVAL

Office of U. S. Supervisor of Surveys,

19...

The foregoing field notes of the survey of

executed by under his special instructions dated, 19, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above-described surveys in, has been correctly copied from the original notes on file in this office.

U. S. Supervisor of Surveys.

149
87

BOOK 4079

4-680
(August, 1928)

FIELD ASSISTANTS.

NAMES.	CAPACITY.
Niel Greenhaw	Principal Assistant
John H. Robinson	Chainman
Daniel B. Elkins	Field Assistant
Ernest Cooley	Field Assistant
M. E. Hydock	Field Assistant
Dawson Cooley	Field Assistant

88

150

BOOK 4079

CERTIFICATE OF UNITED STATES SURVEYOR

We, Daniel M. Wier, U.S. Transitman and Anthony C. Kimmell, U. S. Surveyor, hereby certify upon honor that, in pursuance

of special instructions received from the District Cadastral Engineer for Arizona bearing date of the 15th day of February, 1934, we have well, faithfully, and truly in our own proper persons and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, resurveyed the E. and W. Bdrs. of T. 5 S., R. 9 W.; the W. Bdrs. of Ts. 5 S., Rs. 10 and 11 W.; the E. Bdrs. of Ts. 6 S., Rs. 10, 11 and 12 W.; the W. Bdy. of T. 6 S., R. 12 W.; the S. Bdrs. of Ts. 6 S., Rs. 11 and 12 W.; the W. and S. Bdrs. of Ts. 7 S., Rs. 11 and 12 W.; and a portion of the E. Bdy. of T. 7 S., R. 11 W.

of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by us and under our direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

For signature of Anthony C. Kimmell see attached certificate.

Signature of Daniel M. Wier, U.S. Transitman, Sentinel, Arizona, U. S. Surveyor. APPROVAL March 26, 1934.

OFFICE OF U. S. SUPERVISOR OF SURVEYS, Denver, Colorado, June 11, 1935

The foregoing field notes of resurvey of the East and West Boundaries of Township 5 South, Range 9 West; the West Boundaries of Townships 5 South, Ranges 10 and 11 West; the East Boundaries of Townships 6 South, Ranges 10, 11 and 12 West; the West Boundary of Township 6 South, Range 12 West; the S. Bdrs. of Ts. 6 S., Rs. 11 and 12 W.; the West and South Boundaries of Townships 7 South, Ranges 11 and 12 West; and a portion of the East Boundary of Township 7 South, Range 11 West, of the Gila and Salt River Meridian in the State of Arizona, executed by Anthony C. Kimmell, U.S. Surveyor and Daniel M. Wier, U.S. Transitman their under his special instructions dated February 15, 1934, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Signature of U.S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above described surveys in has been correctly copied from the original notes on file in this office.

Signature of U.S. Supervisor of Surveys.