

Book "C"

BOOK 4089

FIELD NOTES

OF THE RESURVEY OF

East Boundary

Part (S. $\frac{1}{2}$) of West Boundary

and

Part of Subdivision Lines

of Township 13 North, Range 3 West

OF THE RETRACEMENT OF Boundaries of patented mining claims therein

AND OF THE SURVEY OF

Boundaries of Tracts Nos. 37, 38, 39, 40 and 41

Part (N. $\frac{1}{2}$) West Boundary

and Part (completion) of Subdivision Lines

of Township 13 North, Range 3 West

Of the Gila and Salt River Basins and Meridian,

In the State of Arizona

EXECUTED BY

Benjamin J. Kinsey, U. S. Surveyor

Emil Voigt, U. S. Cadastral Engineer

and Robert H. Fischer, U.S. Transiteer

In the capacity of U. S. Surveyor, under Special Instructions dated April 16,

1930, issued by the District Cadastral Engineer to govern surveys included in Group

No. 157 Arizona, which were approved by the Commissioner of the General Land

Office, April 25, 1930, and Assignment Instructions dated May 22, 1931

April 4, 1934

May 18, 1934

Resurvey, Retracement & Survey commenced June 16, 1931

Resurvey, Retracement & Survey completed June 30, 1934

4089

4089


Retracement of boundaries of mining claims - pages 87, 88, 89, 90 & 91

BOOK 4089

INDEX DIAGRAM.

T. 14 N. - R. 4 W.
Completion Survey under this group - Notes in Book "E."

T. 14 N. - R. 3 W.
Resurveyed & Surveyed this group - Notes in Book "B"

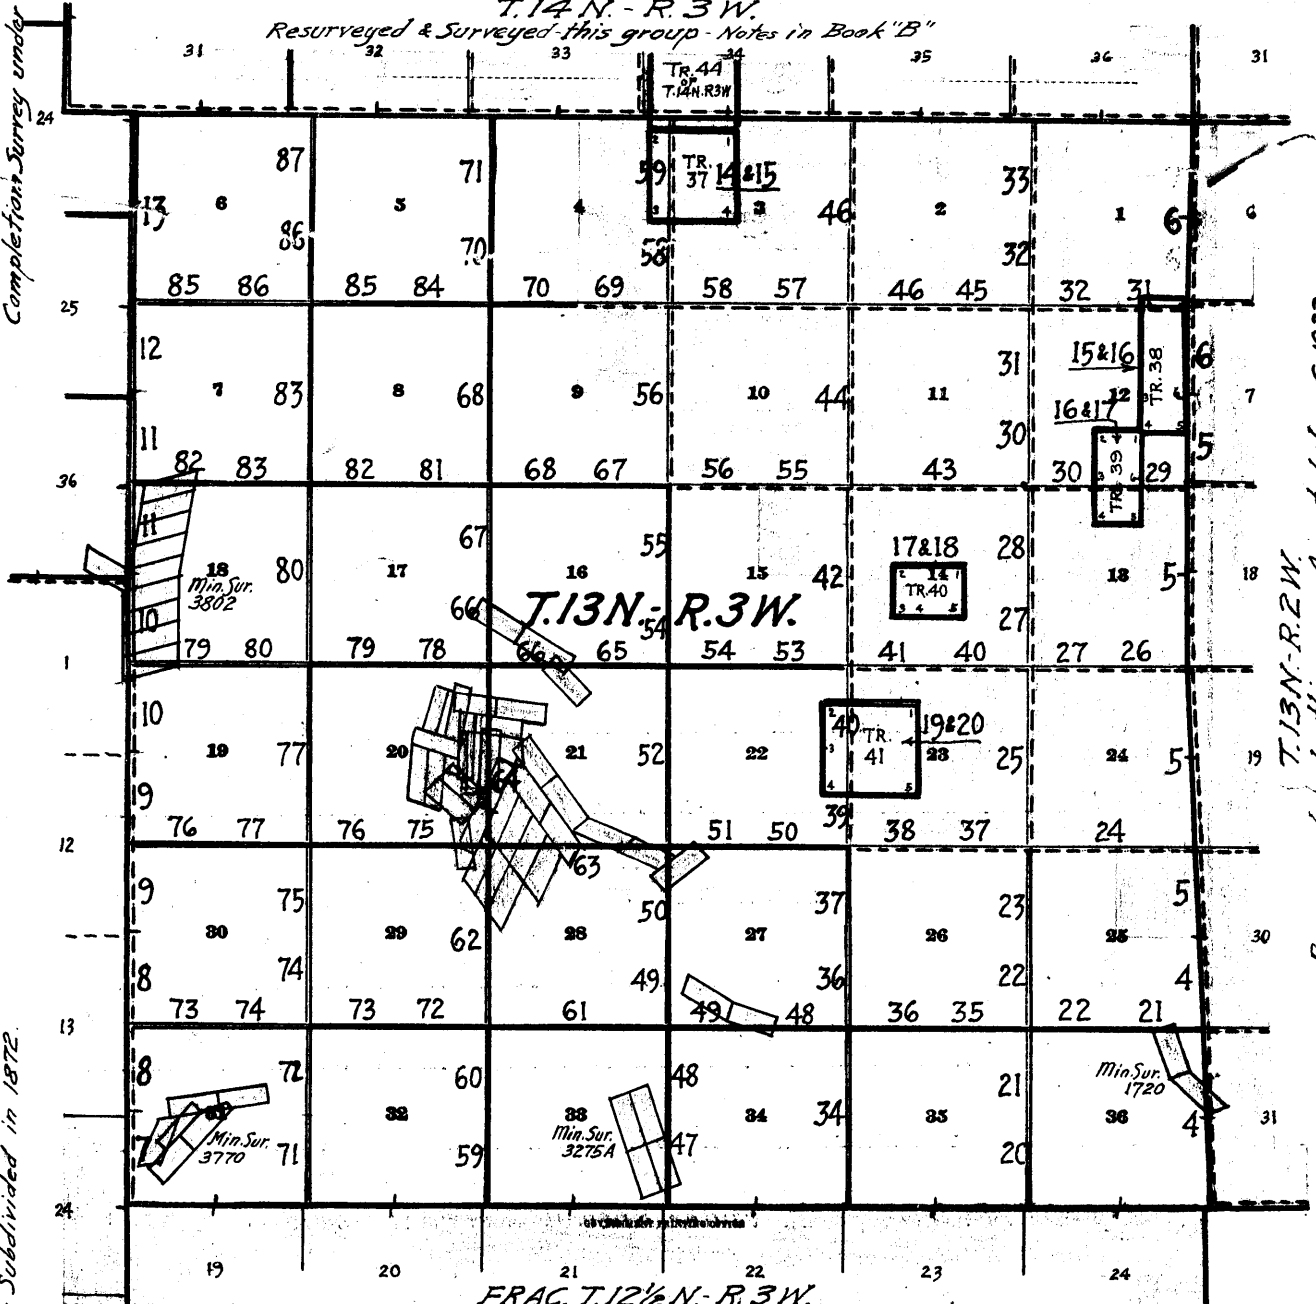

T. 13 N. - R. 4 W.
Partly Subdivided in 1872

T. 13 N. - R. 2 W.
Resurveyed under this group. Accepted June 6, 1933.

FRAC. T. 12 1/2 N. - R. 3 W.
Subdivided in 1927

- Accepted surveys (except lines surveyed or resurveyed under this group which have been accepted.)
- - - - - Unsurveyed.
- · - · - Lines surveyed under this group. (Accepted and unaccepted)
- · - · - Lines resurveyed under this group. (Accepted and unaccepted)
- ▭ Areas surveyed as per accepted plats on file, including patented mining claims.

The retracements, surveys and resurveys hereinafter described were executed by Benjamin J. Kinsey, U.S. Surveyor, Emil Voigt, U.S. Cadastral Engr., and Robert H. Fischer, U.S. Transitman, using respectively, Buff transit No. 18000, Buff transit No. 17994, and Young and Sons transit No. 8487, respectively. The instruments are equipped with Smith solar attachments and otherwise conform to standard requirements of the General Land Office.

Test of Buff transit No. 18000

by

Benjamin J. Kinsey, U.S. Surveyor.

April, 15, 1934; at my station near the $\frac{1}{4}$ sec. cor. of secs. 22 and 23, T.13 N., R.3 W., G. and S.R.B. and M., Arizona, in latitude $34^{\circ}29'N.$, determined by previous altitude observations under this group, and subsequent observation as hereinafter described, approximate longitude $112^{\circ}33'00''W.$; examine the adjustments of the instrument and find no errors. Then to test the workings of the solar attachment, proceed as follows:

At $6^{h}00^{m}$ p.m., l.m.t., I observe Polaris at eastern elongation; making four obsns., two each with the telescope in direct and reversed positions, marking the mean point thus determined by a tack set in top of a stake driven firmly in the ground about 5 chs. southerly.

Azimuth of Polaris at eastern elongation: $1^{\circ}16'30''$.

April, 16; at daylight lay off the azimuth of Polaris, $1^{\circ}16'30''$ to the west and note that the true meridian thus determined bisects a cone shaped tree on skyline about 3 miles distant to the south.

At $9^{h}00^{m}$ a.m., app.t., set off $34^{\circ}29'N.$, on the latitude arc; $10^{\circ}03'N.$ on the decl. arc; and determine a meridian with the solar which agrees within 1' of the true meridian.

At apparent noon, with the latitude arc unchanged, observe the sun on the meridian; the resultant reading of the declination arc is $10^{\circ}06'N.$, which agrees with the computed declination of the sun.

At $3^{h}00^{m}$ p.m., app.t., with latitude arc unchanged, set off $10^{\circ}08'N.$, on decl. arc. and determine a meridian with the solar which agrees within 1' of the true meridian.

As all of the observations, taken during the usual hours of solar work, agree within 1' of the true meridian, conclude that the instrument is in a satisfactory state of adjustment.

Unless otherwise specified all measurements are made on the slope, the vertical angle determined with a clinometer, and the slope measurements properly reduced to horizontal equivalents.



All measurements are made with a Lufkin steel tape, 5 chs. in length, compared with a Lufkin standard and found correct.

For preliminary and final test of Buff transit No. 18,000 used by Benjamin J. Kinsey, U.S. Surveyor, in the execution of the resurvey and survey of the West Bdy. of this Tp., in 1931, see field notes of T.14 N., R.3 W., of this group.

Observation for Time and Latitude.

by
Benjamin J. Kinsey, U.S. Surveyor,
using
Buff transit No. 18,000.

April, 22, 1934: at same station described on page 1, hereof, in approximate latitude $34^{\circ}29'N.$, and longitude $112^{\circ}33'W.$, I make a meridian observation of the sun for time and latitude, observing simultaneously the altitude of the suns lower limb and the transit of the suns west limb, reversing the telescope and observing simultaneously the altitude of the suns upper limb and the transit of the suns east limb:

	Suns position.
Telescope normal:	
Telescope reversed:	
Mean observed altitude:	$67^{\circ}41'04''$.
Reduced latitude	: $34^{\circ}29'08''$
Mean watch time of obsn.:	$12h.32m.52s.$
Watch fast of local mean time:	$34m.17s.$

Preliminary test of Young & Sons transit
No. 8487

by
Robert H. Fischer, U.S. Transitman.

April, 15, 1934: in camp, near the cor. of secs. 19, 20, 29, and 30, T. 13 N., R. 3 W., G. & S.R.B. and M., Arizona, latitude $34^{\circ}29'N.$, and approximate longitude $112^{\circ}36\frac{1}{2}'W.$, examine the adjustments of the transit and find no errors; then to test the workings of the solar apparatus, proceed as follows:

At 6h.00m., p.m., l.m.t., observe Polaris at western elongation, making four obsns., two each with the telescope in direct and reversed positions, and marking the mean point in the line thus determined by a tack set in top of a stake, driven firmly in the ground about 5 chs. N.

Azimuth of Polaris at western elongation: $1^{\circ}16'15''$.

April, 16, 1934: lay off the azimuth of Polaris $1^{\circ}16'15''$ to the east and mark the line thus determined by a nail driven in top of a peg, driven firmly in the ground about 5 chs. North.

At 9h.00m., a.m., app. t., set off $34^{\circ}29'N.$ on the lat. arc, $10^{\circ}03'N.$ on the decl. arc and determine a meridian with the solar which agrees with the true meridian.

At 12h.00m., app. noon, with lat. arc unchanged observe the sun on the meridian; the resultant reading of the decl. arc, is $10^{\circ}06'N.$, which agrees with the computed declination of the sun.

At 3h.00m., p.m., app. t., with lat. arc unchanged, set off $10^{\circ}08'30''N.$, and determine a meridian with the solar which agrees with the true meridian.

As all of the obsns. taken during the usual hours of solar work agree within 1' of the true meridian, conclude that the adjustments of the instrument are satisfactory.

All measurements are made with a Lallie steel tape, 5-chs. in length, compared with a Lufkin standard and found correct.

The measurements are made on the slope, the vertical angle determined, and the slope measurements properly reduced to horizontal values.

Preliminary field test of Buff. transit
No. 17,994

by
Emil Voigt, U.S. Cadastral Engineer.

May, 23, 1934: at same station as described on page 2 hereof, examine the adjustments of the transit and find no errors; then to test the workings of the solar apparatus proceed as follows:

At 9h. 00m., a.m., app. t., with lat. arc set at $34^{\circ}29'N.$, and decl. arc set at $20^{\circ}32'N.$, determine a meridian with the solar which agrees with the true meridian.

At 12h. 00m., app. noon, with lat. arc unchanged, observe the sun on the meridian; the resultant reading of the decl. arc is $20^{\circ}34'N.$, which agrees with the computed declination of the sun.

At 3h. 00m., p.m., app. t., with lat. arc unchanged, and decl. arc set at $20^{\circ}30'N.$, determine a meridian with the solar which agrees with the true meridian.

As all of the obsns. taken during the usual hours of solar work, agree within 1' of the true meridian, conclude that the instrument is in a satisfactory state of adjustment.

All measurements are made with a Lallie steel tape 5- chs. in length, compared with a Lufkin standard and found correct.

The measurements are made on the slope, the vertical angle determined, and slope measurements properly reduced to horizontal values.

Resurvey of the East Bdy. of T.13 N., R. 3 W.

Chains

The east bdy. of T.13 N., R. 3 W., was surveyed by O.H. Case, U.S.D.S., in 1871, establishing cors. thereon with a common reference to areas on both sides of the line. In 1927, Sidney E. Blout, U.S.C.E., in connection with the reestablishment of the SW cor. of T.13 N., R.2 W., retraced the S. half of the W. bdy. of said Tp., found and reconstructed the original cor. of secs. 13, 18, 19, and 24, retaining its original area reference. In 1930, under this group, Benj. J. Kinsey, U.S.S., resurveyed the west bdy. of T.13 N., R.2 W., reestablishing all missing cors. and reconstructing all defective cors. thereon, with reference to areas on the east side of the line only. The following notes describe a resurvey of the E. bdy. of T.13 N., R.3 W., with topography omitted.

Retracement for resurvey.

No retracement for resurvey required as such data was obtained in the resurvey of the W. bdy. of T. 13 N., R.2 W. under this group in 1930.

Resurvey.

From the reestablished Std. cor. of T.13 N., R.2 W., (SW cor.) and cor. of T.13 N., R.3 W., (SE cor.), marked and witnessed as per official record.

N.2°14'W., on true line, on E. bdy. of sec. 36.

40.00

The reestablished $\frac{1}{4}$ sec. cor. of sec. 31. Alter this cor. monument to refer also to the quarters of sec. 36, by changing markings on brass cap to read:

$\frac{1}{4}$
 S 36 | S 31

1934

No bearing tree available in sec. 36; remove mound of stone E. of cor., and raise a mound of stone 3 ft. base, 2 ft. high W. of cor.

80.00

The reestablished cor. of secs. 30, and 31. Alter this cor. monument to refer also to secs. 25 and 36, by changing markings on brass cap to read:

T13N
 R3W | R2W
 S25 | S30
 S36 | S31
 1934

raise a mound
of stone 3 ft. base, 2 ft. high W. of cor.

N.2°14'W., on true line, on E. bdy. of sec.25.

40.00

The reestablished $\frac{1}{4}$ sec. cor. of sec.30. Alter this cor. monument to refer also to sec.25 by changing markings on brass cap to read:

$\frac{1}{4}$
 S 25 | S 30
 1934

Resurvey of the East Bdy. of T. 13 N., R. 3 W.

BOOK 4089

Chains

Remove mound of stone E. of cor., and raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

80.00 The reestablished cor. of secs. 19 and 30.
Alter this cor. monument to refer to secs. 24 and 25 also, by changing markings on brass cap to read:

T13N	
R3W	R2W
S24	S19
S25	S30

1934

raise a mound of stone 3 ft. base, 2 ft. high, W. of cor.

40.00 N.2°14'W., on true line, on E. bdy. of sec. 24.
The reestablished $\frac{1}{4}$ sec. cor. of sec. 19.
Alter this cor. monument to refer to sec. 24, also, by changing markings on brass cap to read:

$\frac{1}{4}$	
S24	S19

1934

No suitable bearing trees available in sec. 24.

80.00 The reconstructed cor. of secs. 18 and 19.
Alter this cor. monument to refer to secs. 13 and 24 also, by changing markings on brass cap to read:

T13N	
R3W	R2W
S13	S18
S24	S19

1934

raise a mound of stone 3 ft. base, 2 ft. high, W. of cor.

40.01 N.1°20'W., on true line, on E. bdy. of sec. 13.
Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for the $\frac{1}{4}$ sec. cor. of sec. 13 only, with brass cap marked

$\frac{1}{4}$ S13	
-------------------	--

1934

A yellow pine, 8 ins. diam., bears N.26 $\frac{1}{2}$ °W., 38 lks. dist., marked $\frac{1}{4}$ S13BT.

A yellow pine, 10 ins. diam., bears S.60 $\frac{1}{2}$ °W., 25 lks. dist., marked $\frac{1}{4}$ S13BT.

42.18 The reestablished $\frac{1}{4}$ sec. cor. of sec. 18.

80.02 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 12 and 13 only, with brass cap marked

T13N	T13N
R3W	R2W
S12	S18
S13	

1934

A yellow pine, 12 ins. diam., bears N.49°W., 59 lks. dist., marked T13N R3W S12 BT.


A yellow pine, 7 ins. diam., bears S.71°W., 13 lks. dist., marked T13N R3W S13 BT.

4.34 N.1°20'W., on true line, on E. bdy. of sec. 12.
The reconstructed cor. of secs. 7 and 18.

Resurvey of the East Bdy. of T. 13 N., R. 3 W.

Chains

Thence
 N.1°05'W., on true line, continuing measurement.
 40.01 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground to bedrock, and in a mound of stone to top, for the 1/4 sec. cor. of sec. 12, with brass cap marked




from which
 A juniper, 8 ins. diam., bears N.70 1/2°W., 48 lks. dist., marked 1/4 S12 BT.
 A yellow pine, 10 ins. diam., bears S.57 1/4°W., 48 lks. dist., marked 1/4 S12 BT.

43.00 The reconstructed 1/4 sec. cor. of sec. 7.

Thence
 N.0°29'W., on true line, continuing measurement.

80.01 Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in the ground to bedrock, and in a mound of stone to top, with stone marked with a cross (x) deposited at base of post, for cor. of secs. 1 and 12 only, with brass cap marked



No suitable bearing trees available.


N.0°29'W., on true line, on E. bdy. of sec. 1.

1.49 The reconstructed cor. of secs. 6 and 7.

Thence
 N.1°06'E., on true line, continuing measurement.

39.89 The reestablished 1/4 sec. cor. of sec. 6.

40.01 Set an iron post, 3 ft. long, 1 in. diam., on bedrock, and in a mound of stone to top for the 1/4 sec. cor. of sec. 1, with brass cap marked



from which
 A pinon, 12 ins. diam., bears N.70 1/2°W., 192 lks. dist., marked 1/4 S1 BT.
 A juniper, 14 ins. diam., bears S.60°W., 120 lks. dist., marked 1/4 S1 BT.

78.09 The cor. of Ts. 13 and 14 N., Rs. 2 and 3 W., described as per official record.

Resurvey and Survey of the West Bdy. of T. 13 N., R. 3 W. BOOK 4089

Chains

The S. half of the W. bdy. of T. 13 N., R. 3 W., was surveyed in 1871 by S.W. Foreman, U.S.D.S., establishing cors. thereon at intervals of 40 chs. with common reference to areas on both sides of the line.

In 1927, Sidney E. Blout, U.S.C.E., surveyed the S. bdy. of T. 13 N., R. 3 W., due W. from the SW. cor. of T. 13 N., R. 2 W., establishing two sets of cors. thereon at 40 ch. intervals, one set counting from said Tp. cor., with reference to areas in T. 13 N., R. 3 W., and one set counting from the closing corner of Frac. T. 12 $\frac{1}{2}$ N., Rs. 2 and 3 W., with reference to areas in Frac. T. 12 $\frac{1}{2}$ N., R. 3 W.

Engineer Blout, at same time resurveyed the South half of the E. bdy. of T. 13 N., R. 4 W., due North 240.00 chs., and at the point where the S. bdy. of T. 13 N., R. 3 W., intersected the E. bdy. of T. 13 N., R. 4 W., he established the closing corner for Frac. T. 12 $\frac{1}{2}$ N., R. 3 W. and T. 13 N., R. 3 W. To the South of said closing corner, the reestablished cors. were marked and witnessed to refer to areas in Frac. T. 12 $\frac{1}{2}$ N., R. 3 W. and T. 13 N., R. 4 W.

The following notes describe a resurvey of the S $\frac{1}{2}$ of the W. bdy. of T. 13 N., R. 3 W., and a survey of the N $\frac{1}{2}$ of said bdy., reestablishing cors. with reference to areas in T. 13 N., R. 3 W., only at 40 ch. intervals counting from the SW. cor. of said Tp. and establishing cors. at 40 ch. intervals with reference E. of line only, counting from the reestablished cor. of secs. 18 and 19, T. 13 N., R. 3 W.

RESURVEY.

From the SW. cor. of T. 13 N., R. 3 W., and the NW. cor. of T. 12 $\frac{1}{2}$ N., R. 3 W., which is an iron post marked and witnessed as described in the official record.

North, on true line, on W. bdy. of sec. 31.
(Measurement and topography accepted from official record for the S. 38.50 chs. of this mile.)

38.50 The cor. of secs. 13 and 24, T. 13 N., R. 4 W., only, which is an iron post marked and witnessed as described in the official record.

Continue over mountainous land, through thinly scattered timber and dense undergrowth.

Asc. slight SE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. of sec. 31 only, with brass cap marked

$\frac{1}{4}$ S31

1934

from which

A hackberry, 5 ins. diam., bears N.87°E., 96 lks. dist., marked $\frac{1}{4}$ S31 BT.

A hackberry, 8 ins. diam., bears S.11°E., 81 lks. dist., marked $\frac{1}{4}$ S31 BT.

Resurvey and Survey of the W. Bdy. of T. 13 N., R. 3 W.

Chains

Asc. 124 ft. over SE. slope.

41.00 Old road, bears E. and W.

57.70 Spur, slopes E.; desc. 21 ft. over NE. slope.

60.00 Wash, near head, course E.; asc. 21 ft. over NE. slope.

63.80 Spur, slopes N. 20° E.; desc. 25 ft. over NW. slope.

67.35 Wash, 10 lks. wide, course SW.; asc. 69 ft. over S. slope.

71.90 Spur, slopes NW.; desc. 26 ft. over NE. slope.

74.70 Wash, 5 lks. wide, course E.; asc. gradual SE. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for the cor. of secs. 30 and 31 only, with brass cap marked

T13N

S30

S31

R3W

1931

raise a mound

of stone, 3 ft. base, 2 ft. high, E. of cor.

No suitable bearing trees available.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, scrub pinion and hackberry.

Undergrowth, oakbrush and cacti.

North, on true line, on W. bdy. of sec. 30.

Over mountainous land, through scattering timber and dense undergrowth.

Asc. 50 ft. over SE. slope.

7.95 Spur, slopes NE.; desc. 58 ft. over NW. slope.

11.90 Wash, 10 lks. wide, course W.; asc. 31 ft. over SW. slope.

13.10 Spur, slopes W.; desc. gradual NW. slope.

18.10 Wash, 5 lks. wide, course W.; asc. gradual SW. slope.

21.90 Spur, slopes W.; desc. 66 ft. over N. slope.

32.45 Wash, 15 lks. wide, course W.; asc. 37 ft. over S. slope.

34.50 Spur, slopes W.; desc. gradual NW. slope.

38.90 Wash, 20 lks. wide, course SW.; asc. gradual S. slope.

Resurvey and Survey of the W. Bdy. of T. 13 N., R. 3 W.

Chains

40.00 Set an iron post 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, with a granite stone 6x6x4 ins. mkd. with X, deposited at base, and in a mound of stone to top for the 1/4 sec. cor. of sec. 30, only, with brass cap marked

1/4 S30

1931

No suitable bearing trees available.

Continue along small wash, draining Southerly, on slight ascent.

45.00 Leave wash, asc. 382 ft. over S. slope.

62.45 Spur, slopes SW from E. Desc. 144 ft. over NW. slope.

72.30 Wash, 20 lks. wide, course W. Asc. 114 ft. over SW. slope.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 19 and 30, only, with brass cap marked

T13N
S19
S30
R3W

1931

raise a mound of stone 4 ft. base, 2 ft. high E. of cor.

Land, mountainous.
Soil, rocky 4th. rate.
Timber, pinion and juniper.
Undergrowth, oakbrush, and cacti.

North, on true line, on W. bdy. of sec. 19.

Over mountainous land, through scattering timber and undergrowth.

Asc. 29 ft. over SW. slope.

1.65 Spur, slopes SW. Desc. 130 ft. over NW. slope.

11.80 Spur, slopes NW. Desc. 261 ft. over N. slope.

30.25 Wash, 60 lks. wide, course W. Road, in wash, bears E. and W. Asc. 22 ft. over SW. slope.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a granite stone 4x4x2 ins. mkd. with X deposited at base, and in a mound of stone to top for the 1/4 sec. cor. of sec. 19, only, with brass cap marked

1/4 S19

1931

from which,

A pinion, 8 ins. in diam., bears N.70°E., 120 lks. dist., marked S19 BT

Resurvey and Survey of the W. Bdy. of T.13 N., R.3 W.

Chains

No other bearing tree available.

Asc. 306 ft. over SW. slope to spur.

45.20 Wash, 10 lks. wide, 8 ft. deep, course SW.

54.55 Wash, 10 lks. wide, 10 ft. deep, course SW.

66.00 Spur, ~~slopes~~ W. Thence along level W. slope.

70.55 Spur, ~~slopes~~ W. Desc. 109 ft. over NW. slope.

74.47 Intersect the S. side line (3-4) of the Arizona patented lode mining claim, Min. Sur. No. 3802 at 39 lks. N. 78° 14' E. of Cor. No. 4 thereof. Across patented mineral land.

77.15 Small spur, ~~slopes~~ W. Desc. 50 ft. over NW. slope.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, deposit a stone 6x5x3 ins., mkd. with an X, at base and in a mound of stone to top for the cor. of secs. 18 and 19, with brass cap marked

T13N
S18
S19
R3W

1931

No bearing trees available.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, pinion and juniper.

Undergrowth, oakbrush, manzanita, and cacti.

Survey.

North, on true line, on W. bdy. of sec. 18.

Over mountainous land, through scattering timber and dense undergrowth, across patented mineral land.

Desc. 121 ft. over NW. slope.

4.30 Wash, 20 lks. wide, course W. Asc. 162 ft. over S. slope.

5.37 Road, bears E. and W.

13.38 Trail, bears NW. and SE.

15.95 Spur, ~~slopes~~ E. Desc. 15 ft. over NE. slope.

20.45 Wash, 10 lks. wide, course E. Asc. 18 ft. over SE. slope.

20.75 Old fence, bears NE. and SW.

22.55 Spur, ~~slopes~~ E. Desc. 32 ft. over NE. slope.

25.60 Wash, 10 lks. wide, course E. Thence over rolling E. slope.

27.50 Wash, 20 lks. wide, course SE. Asc. 313 ft. over S. slope.

Resurvey and Survey of the W. Bdy. of T. 13 N., R. 3 W. BOOK 4055

Chains

39.10 Intersect the N.E. side line (2-3) of the Grey Eagle pat. lode mining claim, Min. Sur. No. 3802, at 79 lks. N.59°20'W. of Cor. No. 3 thereof. Leave patented mineral land.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, and in a mound of stone to top for the 1/4 sec. cor. of sec. 18, with brass cap marked

1/4 S18
1931
from which,

A juniper, 6 ins. in diam., bears N.89°E., 51 lks. dist., marked 1/4 S18BT

A pinion, 10 ins. in diam., bears N.11°E., 152 lks. dist., marked 1/4 S18BT

Asc. 109 ft. over S. slope.

46.65 Ridge, bears E. and W. Desc. 517 ft. over N. slope.

51.35 Trail, bears E. and W.

63.50 Wash, 10 lks. wide, course W. Asc. 59 ft. over SW. slope.

68.60 Spur, slopes West. Desc. 142 ft. over N. slope.

75.45 Wash, 10 lks. wide, course W. Asc. 13 ft. over SW. slope.

76.20 Spur, slopes SW. Desc. 22 ft. over NW. slope.

77.05 Wash, 25 lks. wide, course SW. Asc. 44 ft. over N. slope.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 22 ins. in the ground to bedrock, and in a mound of stone to top for cor. of secs. 7 and 18, with brass cap marked

T13N
S7
S18
R3W

1931
from which,

A pinion, 8 ins. in diam., bears N.87 1/2°E., 60 lks. dist., marked T13NR3WS7BT

A pinion, 10 ins. in diam., bears S.82 1/2°E., 64 lks. dist., marked T13NR3WS18BT

Land, mountainous.
Soil, rocky 4th. rate.
Timber, pinion and juniper.
Undergrowth, oakbrush, manzanita, and cacti.

North, on true line, on W. bdy. of sec. 7.


Over mountainous land, through scattering timber and dense undergrowth.

Asc. 18 ft. over SW. slope.

Resurvey and Survey of the W. Bdy. of T. 13 N., R. 3 W.

Chains

- 4.00 Spur, ~~slopes~~ SW. Desc. 27 ft. over NW. slope.
- 6.90 Wash, 30 lks. wide, course SW. Thence over level W. slope.
- 7.90 Wash, 10 lks. wide, course SW. Asc. 100 ft. over SE. slope.
- 15.35 Spur, ~~slopes~~ SW. Desc. 11 ft. over NW. slope.
- 17.10 Wash, 10 lks. wide, course SW. Asc. 185 ft. over S. slope.
- 37.80 Spur, ~~slopes~~ SW. Desc. 13 ft. over NW. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 24 ins. in the ground for the $\frac{1}{2}$ sec. cor. of sec. 7 only, with brass cap marked




from which,

A pinion, 12 ins. in diam., bears S.77°E., 92 lks. dist., marked $\frac{1}{2}$ S7 BT

A pinion, 6 ins. in diam., bears S.2°E., 295 lks. dist., marked $\frac{1}{2}$ S7 BT

Desc. 60 ft. over NW. slope.

- 43.40 Wash, 20 lks. wide, course SW. Asc. 14 ft. over SW. slope.
- 48.70 Spur, ~~slopes~~ W. Desc. 69 ft. over NW. slope.
- 53.60 Spur, ~~slopes~~ NW. Desc. 89 ft. over N. slope.
- 54.40 Road, bears NE. and SW.
- 60.75 Wash, 10 lks. wide, course W. Asc. 23 ft. over SW. slope.
- 62.20 Spur, ~~slopes~~ W. Desc. 20 ft. over NW. slope.
- 64.40 Wash, 10 lks. wide, course W. Asc. 20 ft. over SW. slope.
- 68.30 Spur, ~~slopes~~ W. Desc. 43 ft. over NW. slope.
- 70.95 Wash, 30 lks. wide, course SW. Asc. 191 ft. over SE. slope.
- 78.04 Trail, bears E. and W.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, with a stone 5x5x2 ins. mkd. X deposited at base, and in a mound of stone to top for the cor. of secs. 6 and 7, only, with brass cap marked



1931

from which,

A pinion, 8 ins. in diam., bears N.46°E., 165 lks. dist., marked T13NR3WS6BT

No other bearing tree available.

The hoist of the Boston Arizona Mine, bears S.54 $\frac{1}{2}$ °E.

Resurvey and Survey of the West Bdy. of T. 13 N., R. 3 W.

BOOK 4088

chains

Land: mountainous.
 Soil: rocky 4th rate.
 Timber: pinion and juniper.
 Undergrowth: oakbrush, manzanita, and cacti.

 North on true line, on W. bdy. of sec. 6.

Over mountainous land, through scattering timber and dense undergrowth.

Asc. 21 ft. over S. slope.

2000 Spur, slopes SW. Desc. 84 ft. over NW. slope.

13.70 Wash, 30 lks. wide, course W. Asc. 190 ft. over S. slope.

21.05 Spur, slopes SW. Desc. 67 ft. over NW. slope.

26.05 Wash, 10 lks. wide, course SW. Asc. 228 ft. over SE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone mkd. with X deposited at base, and in a mound of stone to top for the $\frac{1}{4}$ sec. cor. of sec. 6, only, with brass cap mkd.

$\frac{1}{4}$ S6

1931

No bearing trees available.

Desc. 145 ft. over NW. slope.

50.45 Wash, 10 lks. wide, course SW. Asc. 133 ft. over SW. slope.

59.65 Spur, slopes SW. Desc. 47 ft. over NW. slope.

61.85 Wash, 10 lks. wide, course SW. Asc. 159 ft. over SE. slope.

66.45 Spur, slopes SW. Desc. 53 ft. over NW. slope.

68.90 Wash, 10 lks. wide, course SW. Asc. 37 ft. over SW. slope.

73.65 Spur, slopes W. Desc. 162 ft. over NW. slope.

78.40 Intersect the S. bdy. of T. 14 N., R. 3 W., at 30.30 chs. S. 89° 58' W., from the $\frac{1}{4}$ sec. cor. of sec. 31, reestablished under this group as described in the field notes of resurvey of S. bdy. of said Tp.

At point of intersection, set an iron post, 3 ft. long, 3 ins. in diam., 20 ins. in the ground to bedrock, with stone 5x5x5 ins. mkd. with a cross X deposited at base, and in a mound of stone to top for cor. of T. 13 N., R. 3 W. (NW. cor.) with brass cap mkd.

T14NR3W

S31

T13N

R3W

S6

1931

No suitable bearing trees available.

Land: mountainous.
 Soil: rocky 4th rate.
 Timber, Pinion and juniper.
 Undergrowth: oakbrush, manzanita and cacti.

Tract Surveys in T. 13 N., R. 3 W.

Chains

Tract 37.

Comprising the following described land: Lots 3 and 4, and S 1/4 NW 1/4, Sec. 3, T. 13 N., R. 3 W., patented by Wm. A. Dearing under HE 803, 12-9-1892.

The location of this tract is based upon three original cors. and record.

The NE. cor. of the tract is identical with Angle Point 4 of Tract 44, T. 14 N., R. 3 W., and the original 1/2 sec. cor. of secs. 3 and 34, described in field notes of survey and resurvey of T. 14 N., R. 3 W., executed under this group.

Revise markings on brass cap of cor. post to read:

TR 44	T13N
AP 4	R3W
TR 37	S 3

1934

Thence,

N. 89° 34' W., on line 1-2 of tract 37.

40.04

Intersect the NW. cor. of tract 37, identical with the original cor. of secs. 3, 4, 33 and 34 and Angle Point 3 of Tract 44, T. 14 N., R. 3 W., described in field notes of survey and resurvey of T. 14 N., R. 3 W., executed under this group.

Revise markings on brass cap of cor. post to read:

	TR 44
	AP 3
T13N	AP 2
R3W	TR 37
S 4	

1934

Thence

S: 1° 01' W., on line 2-3 of Tract 37.

40.18

Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, and in a mound of stone to top for Angle Point 3 of Tract 37, with brass cap mkd.

	TR 37
	AP 3
T13N	
R3W	
S 4	

1934

Thence,

N. 88° 37' E., on line 3-4 of tract 37.

39.96

Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, and in a mound of stone to top for Angle point 4 of tract 37, with brass cap mkd.

TR 37	T13N
AP 4	R3W
	S 3

1934

Chains

Thence,

N. 1°10' E., on line 4-1 of tract 37.

38.91 Intersect A.P.1 of tract 37, hereinbefore described, and place of beginning.

Tract 38.

Comprising the following described land: E½NE¼; NE¼SE¼ of sec. 12, T. 13 N., R. 3 W., patented by John Dieruff, Feb. 23, 1885., under HE 354.

The location of this tract is based upon the subdivision of the sec., controlled by five original corners.

The NE.cor. (A.P.1) of tract 38 is identical with the reconstructed cor. of secs. 6 and 7, T. 13 N., R. 2 W., a brass-capped iron post, marked and witnessed as described in the official record.

Change markings on brass cap to read:

T13N	T13N
R3W S1	S6
AP 1	S7
TR 38	R2W
1934	

Thence,

S. 86°35'W., on line 1-2 of tract 38.

19.66 Set an iron post 3 ft. long, 1 in. in diam., 22 ins. in the ground to bedrock, and in a mound of stone to top for A.P.2 of tract 38, with brass cap marked

T13N	AP2
R3W	TR 38
S1	
1934	

Thence,

S. 0°28'E., on line 2-3 of tract 38.

38.12 Set an iron post 3 ft. long, 1 in. in diam., 30 ins. in the ground for A.P.3 of tract 38, with brass cap marked

T13N	TR 38
R3W	AP 3
S12	
1934	

Thence,

S. 0°46'E., on line 3-4 of tract 38.

19.12 Set an iron post 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, and in a mound of stone to top for A.P.4 of tract 38 and A.P.1 of tract 39, with brass cap marked

T13N	TR 38
R3W	AP 4
S12	S 12
AP 1	
TR 39	
1934	


Tract Surveys in T. 13 N., R. 3 W.

Chains

Thence

N. 88°17'E., on line 4-5 of tract 38.

19.75 Set an iron post 3 ft. long, 1 in. in diam., 28 ins. in the ground for A.P. 5 of tract 38, with brass cap mkd.




1934

Thence,

N. 1°05'W., on line 5-6 of tract 38 and along N $\frac{1}{2}$ S $\frac{1}{2}$ of W. bdy. of sec. 7, T. 13 N., R. 2 W.

19.33 Intersect the reconstructed $\frac{1}{4}$ sec. cor. of sec. 7 and A.P. 6 of tract 38, a brass-capped iron post, marked and witnessed as described in the official record. Change markings on brass cap to read



1934

Thence

N. 0°29'W. on line 6-1 of tract 38, and along N $\frac{1}{2}$ of W. bdy. of sec. 7, T. 13 N., R. 2 W.

38.50 Intersect A.P. 1 of tract 38, and cor. of secs. 6 and 7, T. 13 N., R. 2 W., hereinbefore described, the place of beginning.

Tract 39.

Comprising the following described lands: SW $\frac{1}{4}$ SE $\frac{1}{4}$ sec. 12, NW $\frac{1}{4}$ NE $\frac{1}{4}$ sec. 13, T. 13 N., R. 3 W., pat. by Parley A. Williams, HE 694, 1-30-92

The location of this tract is based upon the subdivision of the original secs. 12 and 13, controlled by eight original cors.

From A.P. 1, identical with A.P. 4 of TR. 38, hereinbefore described.

S. 88°17'W., on line 1-2 of tract 39.

19.75 Set an iron post 3 ft. long, 1 in. in diam., 24 ins. in the ground for A.P. 2 of tract 39, with brass cap mkd.



1934

Thence,

S. 0°27'E., on line 2-3 of tract 39.

18.91 Set an iron post 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, and in a mound of stone to top, for A.P. 3 of tract 39, with brass cap marked

Tract Surveys in T. 13 N., R. 3 W.

BOOK 4089

Chains

T13N
R3W
S12

TR 39
AP 3

1934

Thence,

S.1°08'E., on line 3-4 of tract 39.

- 20.45 Set an iron post 3 ft. long, 1 in. in diam., 28 ins. in the ground for A.P.4 of tract 38 with brass cap marked

T13N
R3W
S13

TR 39
AP 4

1934

Thence,

N.89°48'E., on line 4-5 of tract 39.

- 19.90 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, and in a mound of stone to top for A.P.5 of tract 39, with brass cap marked

TR 39
AP 5

S13
T13NR3W

1934

Thence,

N.1°14'W., on line 5-6 of tract 39.

- 20.76 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, and in a mound of stone to top for A.P.6 of tract 39, with brass cap marked

TR 39
AP 6

T13N
R3W
S12

1934

Thence,

N.0°46'W., on line 6-1 of tract 39.

- 19.12 Intersect A.P.1 of tract 39., and place of beginning.

Tract 40.

Comprising the following described land: NW $\frac{1}{4}$ SE $\frac{1}{4}$, E $\frac{1}{2}$ NE $\frac{1}{2}$ SW $\frac{1}{4}$ sec. 14, T. 13 N., R. 3 W., patented by Al. Vroom under HE 048601, 11-6-22.

The location of this tract is based upon the subdivision of the sec., controlled by six original cors.

At point for cor. set an iron post 3 ft. long, 1 in. in diam., 28 ins. in the ground for the NE cor., A.P.1 of tract 40, with brass cap marked

Tract Surveys in T. 13 N., R. 3 W.

Chains

T13NR3WS14

AP 1
TR 40

1934

Thence,

S.89°24'W., on line 1-2 of tract 40.

29.65 Set an iron post 3 ft. long, 1 in. in diam., 8 ins. in the ground to bedrock, and in a mound of stone to top for A.P.2 of tract 40, with brass cap marked

T13NR3W

S14 AP 2
TR 40

1934

Thence,

S.0°40'E., on line 2-3 of tract 40.

20.48 Set an iron post 3 ft. long, 1 in. in diam., 28 ins. in the ground for A.P. 3 of tract 40, with brass cap mkd.

S14 TR 40
AP 3

T13NR3W

1934

Thence,

N.89°38'E., on line 3-4 of tract 40.

10.01 Set an iron post 3 ft. long, 1 in. in diam., 30 ins. in the ground for A.P. 4 of tract 40, with brass cap mkd.

AP 4 TR 40

S14
T13NR3W
1934

Thence,

N.89°50'E., on line 4-5 of tract 40.

19.77 Set an iron post 3 ft. long, 1 in. in diam., 21 ins. in the ground to bedrock, and in a mound of stone to top, for A.P.5 of tract 40 with brass cap marked

T13N R3W
TR 40 S14
AP 5

1934

Thence,

N.1°02'W., on line 5-1 of tract 40.

20.67 Intersect A.P.1 of tract 40, and place of beginning.

Tract Surveys in T. 13 N., R. 3 W.

Chains

Tract 41.

Comprising the following described land: $S\frac{1}{2}$ NW $\frac{1}{4}$; N $\frac{1}{2}$ SW $\frac{1}{4}$ sec. 23, T. 13 N., R. 3 W., patented by Ada J. Peat, HE 1872, 5-9-1907.

The location of this tract is based upon subdivision of the section, controlled by eight original cors.

Begin at the NE.cor. of tract 41.

At point for cor., set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, and in a mound of stone to top for A.P.1 of tract 41 with brass cap marked

T13NR3WS23

AP 1
TR 41

1934

Thence,

S.89°56'W., on line 1-2 of tract 41.

40.19 Set an iron post 3 ft. long, 1 in. in diam., 28 ins. in the ground for A.P.2 of tract 41, with brass cap marked

T13NR3WS22

AP 2
TR 41

1934

Thence,

S.0°05'W., on line 2-3 of tract 41.

20.00 Set an iron post 3 ft. long, 1 in. in diam., 24 ins. in the ground for A.P.3 of tract 41, with brass cap marked

T13N | AP 3
R3W | TR 41
S22

1934

Thence,

S.0°05'W., on line 3-4 of tract 41.

19.93 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for A.P.4 of tract 41, with brass cap marked

TR 41 | T13N
AP 4 | R3W
S22

1934

Thence,

S.89°58'E., on line 4-5 of tract 41.

39.92 Set an iron post 3 ft. long, 1 in. in diam., 30 ins. in

Tract Surveys in T. 13 N., R. 3 W.

Chains

the ground to bedrock, and in a mound of stone to top for A.P.5 of tract 41, with brass cap marked

T13NR3W
TR 41
AP 5 S23
1934

Thence,

N.0°21'E., on line 5-1 of tract 41.

39.99 Intersect A.P.1 of tract 41, and place of beginning.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

In 1871, O.H. Case, U.S.D.S., surveyed secs. 1, 2, 3, 10, 11, 12, 13, 14, 24, and parts of secs. 4, 9, 15, 23, and 25. In 1904, J.F. Hesse, U.S.D.S., resurveyed the lines bet. secs. 23 and 24, and 14 and 23, reconstructing defective original cors. thereon and completed the survey of sec. 23, in connection with the identification of certain patented land in said section.

No other retracements or surveys are of record.

The following notes describe an independent resurvey of all previously surveyed lines, and the completion of survey of the subdivision lines in the township.

The cor. of secs. 35 and 36, on S. bdy. of Tp., is an iron post 2 ins. in diam., firmly set 12 ins. below the surface of the "White Spar" Highway, with brass cap marked and witnessed as described in the official record.

Thence

North, on Sectional Guide Meridian, bet. secs. 35 and 36

Over mountainous land, through scattering timber and dense undergrowth.

0.10 N. edge of "White Spar" highway; bears E. and W. Asc. 182 ft. over SW. slope.

8.60 Spur, slopes W. Desc. 15 ft. over NW. slope.

9.90 Head of wash, course W. Asc. 358 ft. over S. slope.

15.00 Slope changes to E. Continue gradual ascent.

26.00 Shallow draw, course SE. Continue up wash.

34.50 Spur, slopes SW. Desc. 20 ft. over NW. slope.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 27 ins. in the ground for the sec. cor. of secs. 35 and 36, with brass cap mkd.

S35 S36
1934

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains

- of stone 4 ft. base, 2 ft. high W. of cor. raise a mound
- Desc. 9 ft. over NW. slope.
- 42.80 Head of wash, course W. Asc. 34 ft. over SW. slope.
- 47.80 Spur, slopes W. Desc. gradual NW. slope.
- 48.40 Wash, 10 lks. wide, course SW. Asc. 259 ft. over SW. slope.
- 52.45 Forest Service trail, bears NE. and SW.
- 56.43 Spur, slopes SE. Desc. 25 ft. over NE. slope.
- 57.85 Forest Service trail, bears NW. and SE.
- 59.05 Head of wash, course SE. Asc. 151 ft. over SW. slope.
- 66.10 Same trail, bears NE. and SW.
- 67.54 Same trail, bears NW. and SE.
- 68.65 Spur, slopes W. Desc. 53 ft. over NW. slope.
- 69.15 Trail, bears NE. and SW.
- 71.60 Head of wash, course W. Asc. 76 ft. over SW. slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, with a stone 6x6x2 ins. mkd. X deposited at base of post, and in a mound of stone to top for cor. of secs. 25, 26, 35, and 36, with brass cap marked

T13NR3W
S26 | S25
S35 | S36

1934

No suitable bearing trees available.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, oak, pinion, and juniper.

Undergrowth, oakbrush, manzanita, and cacti.

- East, on a random line, bet. secs. 25 and 36.
- 40.00 Set temp. $\frac{1}{2}$ sec. cor.
- 77.12 Intersect E. bdy. of Tp., at 8 lks. S. of the cor. of secs. 25, 30, 31, and 36, which is an iron post 2 ins. in diam., marked and witnessed as described in the official record.
- Thence,
- S.89°56'W., on true line, bet. secs. 25 and 36.
- Over mountainous land, through scattering timber and dense undergrowth.
- Asc. 184 ft. over NE. slope.
- 9.80 Spur, slopes SE. Desc. 363 ft. over SW. slope.

Resurvey and Survey of Subdivision Lines of T. 13 N., R. 3 W.

Chains

- 25.90 Wash, 20 lks. wide, course S. Asc. 156 ft. over SE. slope.
- 37.12 Set an iron post 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, with a stone 5x5x3 ins., mkd. with X deposited at base, and in a mound of stone to top for the $\frac{1}{4}$ sec. cor. of secs. 25 and 36, with brass cap marked
- $\frac{1}{4}$ S 25
~~S 36~~
- 1934
- No suitable bearing trees available.
- Asc. 145 ft. over SE. slope.
- 43.85 End of spur, slopes S. Desc. 60 ft. over SW. slope.
- 49.78 Wash, 15 lks. wide, course SE. Asc. 139 ft. over NE. slope.
- 59.60 Spur, slopes SE. Desc. 13 ft. over SW. slope.
- 59.92 Trail, bears NW. and SE. From this point,
A mine shaft, bears S. 23° E.
NW. end of miners cabin, bears S. 20° E.
- 61.30 Head of wash, course S. Asc. 316 ft. over SE. slope.
- 72.29 From which point,
Same mine shaft, bears S. 48 $\frac{1}{2}$ ° E.,
NW. end of same cabin, bears S. 43 $\frac{1}{2}$ ° E.
- 73.59 Trail, bears N. and S.
- 73.80 Ridge, bears N. and S. Desc. 68 ft. over W. slope.
- 77.12 The cor. of secs. 25, 26, 35, and 36.
- Land, mountainous.
Soil, rocky 4th. rate.
Timber, juniper, pinion, and oak.
Undergrowth, oak, mahogany, and manzanita.
-
- North, on Sectional Guide Meridian, bet^o secs. 25 and 26.
- Over mountainous land, through scattering timber and undergrowth.
- Asc. 79 ft. over SW. slope.
- 6.50 Ridge, bears NW. and SE. Desc. 55 ft. over NE. slope.
- 10.50 Forest Service Trail, bears NW. and SE.
- 16.00 Head of wash, course SE. Asc. 31 ft. over SE. slope.
- 18.10 Forest Service trail, bears NE. and SW.
- 19.35 Saddle in ridge, bears NE. and SW. Desc. 119 ft. over NW. slope.
- 25.15 Wash, 10 lks. wide, course NW. Asc. 231 ft. over SW. slope.
- 36.20 Forest Service trail, bears NW. and SE.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains

the ground, for the $\frac{1}{4}$ sec. cor. of secs. 25 and 26,
with brass cap marked

$\frac{1}{4}$
 S26 | S25
 1934

from which,

A juniper, 8 ins. in diam., bears N.39°W., 63 lks.
dist., mkd. $\frac{1}{4}$ S26 BT

Raise a mound of stone 3 ft. base, $1\frac{1}{2}$ ft. high W. of
cor.

Asc. 35 ft. over SW. slope.

- 45.05 Trail, bears NE. and SW.
- 46.25 Spur, slopes W. Desc. 47 ft. over N. slope.
- 49.70 Head of wash, course W. Asc. 175 ft. over SW. slope.
- 62.20 Trail, bears N.30°W., and S.30°E.
- 66.20 Spur, slopes SW.
- 70.00 Trail, bears NE. and SW.
- 74.75 Head of wash, course W. Asc. 55 ft. over SW. slope.
- 78.30 Spur, slopes W. Desc. 9 ft. over NW. slope.
- 79.30 Head of wash, course W. Asc. 12 ft. over SW. slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 28 ins. in
the ground for cor. of secs. 23, 24, 25, and 26, with
brass cap marked

T13NR3W
 S23 | S24
 S26 | S25

1934

from which,

A juniper, 30 ins. in diam., bears N.50°W., 50 lks.
dist., marked T13NR3WS23BT

A yellow pine, 30 ins. in diam., bears N.47°E., 64 lks.
dist., marked T13NR3WS24BT

A yellow pine, 28 ins. in diam., bears S.13°E., 115 lks.
dist., marked T13NR3WS25BT

A yellow pine, 28 ins. in diam., bears S.55°W., 76 lks.
dist., marked T13NR3WS26BT

Land, mountainous.

Soil, rocky, 4th rate.


Timber, yellow pine, oak and juniper.

Undergrowth, oakbrush, mahogany and manzanita.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains	
	N.89°56'E., on a random line, bet. secs. 24 and 25.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
73.69	Intersect E. bdy. of Tp., at 5 lks. N. of the cor. of secs. 19, 24, 25, and 30, which is an iron post 2 ins. in diam., marked and witnessed as described in the official record.
	Thence,
	S.89°58'W., on true line, bet. secs. 24 and 25.
	Over mountainous land, through scattering timber and undergrowth.
	Asc. 196 ft. over NE. slope.
8.20	Spur, slopes SE. Desc. 284 ft. over SW. slope.
20.40	Wash, 10 lks. wide, course SW. Asc. 23 ft. over SE. slope.
25.40	Spur, slopes S. Desc. 116 ft. over SW. slope.
31.60	Wash, 10 lks. wide, course SE. Asc. 60 ft. over NE. slope.
33.69	Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for the $\frac{1}{4}$ sec. cor. of secs. 24 and 25, with brass cap marked
	$\frac{S \ 24}{S \ 25}$
	1934
	from which,
	An oak, 4 ins. in diam., bears N.52°W., 34 lks. dist., marked $\frac{1}{4}$ S 24 BT
	An oak, 4 ins. in diam., bears S.1 $\frac{1}{2}$ °W., 34 lks. dist., marked BT
	Asc. 88 ft. over NE. slope.
37.15	Spur, slopes S. Desc. 100 ft. over W. slope.
40.23	Wash, 20 lks. wide, course SE. Asc. 195 ft. over NE. slope.
47.00	Spur, slopes S. Desc. 24 ft. over W. slope.
48.60	Wash, 10 lks. wide, course N. Asc. 179 ft. over NE. slope.
58.60	Spur, slopes NE. Desc. 23 ft. over NW. slope.
61.70	Head of wash, course N. Asc. 182 ft. over NE. slope.
70.80	Ridge, bears N. and S. Desc. 35 ft. over SW. slope.
73.69	Intersect the cor. of secs. 23, 24, 25, and 26.
	Land, mountainous.
	Soil, rocky 4th. rate.
	Timber, yellow pine, oak, and juniper.
	Undergrowth, oakbrush, manzanita, and mahogany.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

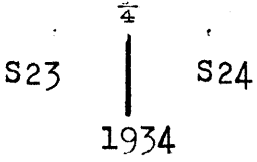Chains	
	North, on true line, bet. secs. 23 and 24, on Sectional Guide Meridian.
	Over mountainous land, through dense timber and undergrowth.
	Asc. gradual SW. slope.
0.20	Forest Service trail, bears NW. and SE.
1.03	Same trail, bears NE. and SW.
1.50	Ridge, bears NW. and SE. Desc. 140 ft. over NE. slope.
8.45	Same trail, bears NW. and SE.
13.30	Wash, 10 lks. wide, course SE. Asc. 49 ft. over SE. slope.
17.75	Spur, slopes E. Desc. 14 ft. over NE. slope.
19.73	Wash, 10 lks. wide, course SE. Asc. 293 ft. over SW. slope.
36.10	Ridge, bears NW. and SE. Desc. 50 ft. over NE. slope.
40.00	Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. of secs. 23 and 24, with brass cap marked
	
	from which,
	An oak, 10 ins. in diam., bears N.48°E., 36 lks. dist., marked $\frac{1}{4}$ S24 BT
	A yellow pine, 14 ins. in diam., bears S.12°W., 42 lks. dist., marked $\frac{1}{4}$ S23 BT
	The original $\frac{1}{4}$ sec. cor. of secs. 23 and 24, bears N.80°56'W., 10.34 chs. dist.; this cor. is a stone 6x8x10 ins., firmly set and marked and witnessed as described in the official record. Destroy all trace of this cor. monument.
	Desc. 204 ft. over N. slope.
40.50	Wash, 10 lks. wide, course N.
44.75	Leave wash, turns NE.
53.30	Wash, 10 lks. wide, course E. Asc. 9 ft. over SE. slope.
55.70	Spur, slopes SE. Desc. 15 ft. over NE. slope.
58.55	Wash, 10 lks. wide, course SE. Asc. 29 ft. over S. slope.
65.30	Spur, slopes SE. Desc. 37 ft. over NE. slope.
68.40	Wash, 10 lks. wide, course E. Asc. 30 ft. over SE. slope.
72.58	Spur, slopes E. Desc. 108 ft. over NE. slope.
77.95	Wash, 10 lks. wide, course E. Asc. 25 ft. over SE. slope.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains

80.00 Spur, slopes E.; set an iron post 3 ft. long, 2 ins. in diam., 27 ins. in the ground for cor. of secs. 13, 14, 23, and 24, with brass cap marked

T13NR3W
S14|S13
S23|S24

1934

from which,

A yellow pine, 15 ins. in diam., bears N.82 $\frac{1}{2}$ °W., 61 lks. dist., marked T13NR3WS14BT

A yellow pine, 24 ins. in diam., bears N.77 $\frac{1}{2}$ °E., 21 lks. dist., marked T13NR3WS13BT

A yellow pine, 20 ins. in diam., bears S.21 $\frac{1}{2}$ °E., 41 lks. dist., marked T13NR3WS24BT

A yellow pine, 28 ins. in diam., bears S.50 $\frac{1}{2}$ °W., 18 lks. dist., marked T13NR3WS23BT

The original cor. of secs. 13, 14, 23, and 24, bears N.80°50'W., 9.79 chs. dist. This cor. is a stone 14x5x10 ins., marked and witnessed as described in the official record. Alongside the original cor. set an iron post 3 ft. long, 2 ins. in diam., 30 ins. in the ground for Witness Point in connection with survey of tracts 38, 39, and 40, with brass cap marked

W P

1934

Land, mountainous.

Soil, rocky 4th. rate.

Timber, yellow pine, oak, and juniper.

Undergrowth, oakbrush, mahogany, and manzanita.

N.89°58'E., on a random line, bet. secs. 13 and 24.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

70.43 Intersect E. bdy. of Tp., at 4 lks. N. of the cor. of secs. 13, 18, 19 and 24, hereinbefore described.

Thence,

West, on true line, bet. secs. 13 and 24.

Over mountainous land, through dense timber and dense undergrowth.

Desc. 150 ft. over SW. slope.

5.60 Wash, 15 lks. wide, course S. Asc. 112 ft. over SE. slope.

11.20 Spur, slopes S. Desc. 48 ft. over SW. slope.

17.05 Wash, 10 lks. wide, course SW. Asc. 52 ft. over SE. slope.

24.00 Spur, slopes S. Desc. 37 ft. over SW. slope.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains

- 27.45 Head of wash, course S. Asc. 10 ft. over SE. slope.
- 30.43 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. of secs. 13 and 24, with brass cap marked

$\frac{1}{4}$ S13
 $\frac{1}{4}$ S24

1934

from which,

A juniper, 36 ins. in diam., bears N.20°W., 102 lks. dist., marked $\frac{1}{4}$ S13 BT

A yellow pine, 14 ins. in diam., bears S.54°E., 25 lks. dist., marked $\frac{1}{4}$ S24 BT

Asc. 206 ft. over SE. slope.

- 35.00 Forest Service trail, bears NE. and SW.
- 44.50 Ridge, bears NE. and SW. Desc. 164 ft. over NW. slope.
- 60.57 Wash, 10 lks. wide, course NE. Asc. 127 ft. over E. slope.
- 70.43 Intersect the cor. of secs. 13, 14, 23, and 24.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, oak, yellow pine, and juniper.

Undergrowth, oakbrush, manzanita, and mahogany.

North, on true line, bet. secs. 13 and 14.

Over mountainous land, through dense timber and undergrowth.

Desc. 57 ft. over NE. slope.

- 3.50 Wash, 10 lks. wide, course NE. Continue desc. of 253 ft. over general N. slope.
- 11.40 Cold Spring creek, 5 lks. wide, 2 ins. deep, course SE. Asc. 300 ft. over S. slope to spur.
- 13.25 Copper Basin road, bears E. and W.
- 22.85 Power line, bears N.58°E. and S.58°W.
- 33.90 Spur, slopes NE. Desc. 119 ft. over NW. slope.
- 39.40 Wash, 10 lks. wide, course NW. Asc. slight SW. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. of secs. 13 and 14, with brass cap marked

S14

S13

1934

from which,

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains

A yellow pine, 8 ins. in diam., bears S.27 $\frac{1}{4}$ °E., 54 lks. dist., marked $\frac{1}{4}$ S13 BT

An oak, 14 ins. in diam., bears S.10 $\frac{1}{2}$ °W., 63 lks. dist., marked $\frac{1}{4}$ S14 BT

The original $\frac{1}{4}$ sec. cor. of secs. 13 and 14 bears N.73 $\frac{1}{4}$ °W., 11.07 chs. dist. This cor. is an old mound of stone in center of which is a pine post 3x3x20 ins. up, unmarked. From which,

A yellow pine, 24 ins. in diam., bears S.76°E., 41 lks. dist., marked $\frac{1}{4}$ SBT

Destroy all trace of this cor. monument.

Desc. 275 ft. over NW. slope.

56.10 Wash, 20 lks. wide, course N. Continue desc. down wash.

60.10 Leave wash, turns E. Asc. 57 ft. over SE. slope.

64.00 Spur, slopes NE. Desc. 63 ft. over NW. slope.

69.00 Wash, 8 lks. wide, course NE. Asc. 23 ft. over SE. slope.

73.70 Spur, slopes E. Desc. 81 ft. over NE. slope.

79.30 Wash, 25 lks. wide, course E. Asc. gradual SE. slope.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bedrock, with a stone 5x5x3 ins. mkd. X., deposited at base, and in a mound of stone to top for cor. of secs. 11, 12, 13, and 14, with brass cap mkd.

T13NR3W	
S11	S12
S14	S13

1934

from which,

A yellow pine, 14 ins. in diam., bears N.42°W., 9 lks. dist., marked T13NR3WS11BT

An oak, 14 ins. in diam., bears N.60 $\frac{1}{2}$ °E., 45 lks. dist., marked T13NR3WS12BT

A yellow pine, 10 ins. in diam., bears S.47°E., 31 lks. dist., marked T13NR3WS13BT

A yellow pine, 10 ins. in diam., bears S.43°W., 21 lks. dist., marked T13NR3WS14BT

The original cor. of secs. 11, 12, 13, and 14, bears N.75°41'W., 11.32 chs. dist. This cor. is an old mound of stone, from which,

A juniper, 36 ins. in diam., bears S.40°E., 48 lks. dist., marked TX111NR111WSX111BT

A yellow pine, 14 ins. in diam., bears S.20°E., 14 lks. dist., marked TX111NR111WSX111BT

In center of old mound of stone set an iron post 3 ft. long, 2 ins. in diam., 22 ins. in the ground for witness point to tracts 38, 39, and 40, with brass cap mkd.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains	
	<p>1934</p> <p>Land, mountainous. Soil, rocky 4th. rate. Timber, yellow pine, oak, and juniper. Undergrowth, oakbrush, manzanita, and mahogany.</p>
	<p>East, on a random line, bet. secs. 12 and 13.</p>
40.00	Set temp. $\frac{1}{4}$ sec. cor.
68.57	Intersect the E. bdy. of Tp., at the cor. of secs. 12 and 13, hereinbefore described.
	Thence,
	West, on true line, bet. secs. 12 and 13.
	Over mountainous land, through dense timber and undergrowth.
	Asc. 12 ft. over SE. slope.
1.45	Spur, slopes S. Desc. 37 ft. over SW. slope.
4.30	Head of wash, course S. Asc. 13 ft. over SE. slope.
6.25	Spur, slopes S. Desc. 138 ft. over SW. slope.
16.55	Copper Basin highway, bears N.45°E., and S.45°W.
19.87	Intersect E. bdy. of tract 39 (5-6) at 3.95 chs. S.1°14'E., of AP 6 thereof. Across patented land.
21.00	Aspen creek, 40 lks. wide, course NW. Asc. 24 ft. over NE. slope.
21.53	Old road, bears NE. and SW.
28.57	Set an iron post 3 ft. long, 1 in. in diam., 28 ins. in the ground for the $\frac{1}{4}$ sec. cor. of secs. 12 and 13, with brass cap marked.
	$\frac{1}{4}$ $\frac{S12}{S13}$ 1934
	from which,
	A yellow pine, 12 ins. in diam., bears N.30 $\frac{1}{2}$ °W., 23 lks. dist., marked $\frac{1}{4}$ S12 BT
	A yellow pine, 12 ins. in diam., bears S.0°45'W., 30 lks. dist., marked $\frac{1}{4}$ S13 BT
	Asc. 18 ft. over E. slope.
29.75	Spur, slopes NE. Desc. 7 ft. over NW. slope.
32.55	Wash, 10 lks. wide, course N. Asc. 44 ft. over NE. slope.
34.20	Spur, slopes N. Desc. 53 ft. over NW. slope.
38.10	Wash, 15 lks. wide, course N. Asc. 75 ft. over NE. slope.

Resurvey and Survey of Subdivision Lines of T. 13 N., R. 3 W.

Chains	
39.75	Intersect W. bdy. of Tract 39 (3-4) at 3.57 chs. S.1°08'E. of AP 3 thereof. Leave patented land.
44.50	Group of houses bear N. about 3 chs. dist.
56.50	A cabin, bears N. about 2 chs. dist.
58.50	End of spur, slopes N. Desc. 15 ft. over W. slope.
59.78	Old road, bears N. and S.
60.10	Wash, 25 lks. wide, course N. Asc. 46 ft. over E. slope.
63.03	End of spur, slopes S. Desc. 8 ft. over W. slope.
68.57	Intersect the cor. of secs. 11, 12, 13, and 14.

Land, mountainous.
Soil, rocky 4th. rate.
Timber, yellow pine, oak, juniper, and aspen.
Undergrowth, oakbrush, manzanita, and mahogany.

North, on true line, bet. secs. 11 and 12, on Sectional Guide Meridian.

Over mountainous land, through dense timber and undergrowth.

Asc. 46 ft. over S. slope.

4.65	Spur, slopes E. Desc. 12 ft. over NE. slope.
6.15	Head of wash, course SE. Asc. 66 ft. over S. slope.
10.50	Spur, slopes E. Desc. 54 ft. over NE. slope.
14.95	Wash, 10 lks. wide, course E. Asc. 70 ft. over SE. slope.
21.45	Spur, slopes E. Desc. 28 ft. over NE. slope.
25.70	Wash, 10 lks. wide, course SE. Asc. 28 ft. over SE. slope.
29.35	Spur, slopes E. Desc. 27 ft. over NE. slope.
31.10	Wash, 10 lks. wide, course E. Asc. 15 ft. over SE. slope.
32.90	Spur, slopes E. Desc. 39 ft. over NE. slope.
37.35	Wash, 10 lks. wide, course SE. Asc. 35 ft. over SE. slope.
40.00	Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. of secs. 11 and 12, with brass cap marked

S11 | S12

1934

from which,


A yellow pine, 9 ins. in diam., bears N. 26 $\frac{1}{2}$ ° W., 33 lks. dist., marked $\frac{1}{4}$ S11 BT.

A yellow pine, 10 ins. in diam., bears S. 58 $\frac{1}{2}$ ° E., 42 lks. dist., marked $\frac{1}{4}$ S12 BT.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains

- Asc. 12 ft. over SE. slope.
- 41.80 Spur, slopes E. Desc. 10 ft. over NE. slope.
- 43.30 Wash, 10 lks. wide, course SE. Asc. 40 ft. over SE. slope.
- 46.80 Spur, slopes NE. Desc. 157 ft. over NW. slope.
- 58.80 Old prospect hole bears E. 20 lks. dist.
- 59.20 Wash, 10 lks. wide, course W. Asc. 40 ft. over SW. slope.
- 67.35 Spur, slopes W. Desc. 123 ft. over NW. slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for the cor. of secs. 1, 2, 11, and 12, with brass cap marked



1934

from which,

A yellow pine, 12 ins. in diam., bears N.45°W., 25 lks. dist., marked T13NR3WS2BT

An oak, 6 ins. in diam., bears N.14½°E., 32 lks. dist., marked T13NR3WS1BT

A juniper, 10 ins. in diam., bears S.19½°E., 110 lks. dist., marked T13NR3WS12BT

A yellow pine, 10 ins. in diam., bears S.18°W., 43 lks. dist., marked T13NR3WS11BT

The original cor. of secs. 1, 2, 11, and 12, bears S.73°57'W., 11.54 chs. dist. This cor. is a stone 12x10x8 ins. loosely set in a mound of stone, marked with one notch on E. face; other markings gone. The original bearing trees have gone. Alongside original cor. stone set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in the ground for witness point to tracts 38 and 39. with brass cap marked

WP

1934

Land, mountainous.
Soil, rocky 4th. rate.
Timber, yellow pines, oak, and juniper.
Undergrowth, oakbrush, manzanita, and mahogany.

- 40.00 East, on a random line, bet. secs. 1 and 12. Set temp. ¼ sec. cor.
- 67.42 Intersect the E. bdy. of Tp. at the cor. of secs. 1 and 12, hereinbefore described.
- Thence;
- West, on true line, bet. secs. 1 and 12.

Resurvey and Survey of Subdivision Lines of T. 13 N., R. 3 W.

Chains

Over mountainous land, through dense timber and dense undergrowth.

Across patented tract 38.

Asc. 19 ft. over SE. slope.

6.15 Spur, slopes S. Desc. 58 ft. over SW. slope.

11.60 Wash, 15 lks. wide, course SE. Asc. 241 ft. over E. slope.

18.80 Wire fence, bears N.15°E., and S.15°W.

19.63 Intersect line (2-3) of tract 38 at 32 lks. S.0°28'E. of AP 2 thereof. Leave patented land.

26.60 Spur, slopes S. Desc. gradual W. slope.

27.42 Set an iron post 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, and in a mound of stone to top for the 1/4 sec. cor. of secs. 1 and 12, with brass cap marked

S 1

1/4

S 12

1934

from which,

A yellow pine, 15 ins. in diam., bears N.79 1/4°W., 37 lks. dist., marked 1/4 S1 BT

An oak, 9 ins. in diam., bears S.12 1/2°W., 36 lks. dist., marked 1/4 S12 BT

Desc. 137 ft. over W. slope.

34.30 Wash, 15 lks. wide, course S. Asc. 72 ft. over NE. slope.

40.20 Old road, bears NE. and SW.

46.23 Spur, slopes N. Desc. 47 ft. over NW. slope.

54.40 Wash, 10 lks. wide, course NE. Asc. 35 ft. over E. slope.

57.10 Spur, slopes N. Desc. 42 ft. over NW. slope.

60.20 Wash, 15 lks. wide, course N. Asc. 25 ft. over NE. slope.

63.80 Spur, slopes N. Desc. 8 ft. over NW. slope.

66.65 Wash, 10 lks. wide, course N. Asc. 13 ft. over NE. slope.

67.42 The cor. of secs. 1, 2, 11, and 12.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, yellow pine, oak, and juniper.

Undergrowth, oakbrush, manzanita, and mahogany.

North, on true line, bet. secs. 1 and 2, on Sectional Guide Meridian.


Over mountainous land, through dense timber and dense undergrowth.

Desc. 37 ft. over NE. slope.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W. BOOK 4080

Chains

- 4.00 Wash, 50 lks. wide, course NE. Asc. 147 ft. over SE.slope.
- 28.35 Spur, slopes E. Desc. 63 ft. over NE.slope.
- 36.55 Wash, 20 lks. wide, course E. Asc. 7 ft. over SE.slope.
- 40.00 Spur, slopes E. Set an iron post 3 ft. long, 1 in. in diam., 28 ins. in the ground for the $\frac{1}{4}$ sec. cor. of secs. 1 and 2, with brass cap marked



from which,

A yellow pine, 14 ins. in diam., bears S.31 $\frac{1}{2}$ °E., 34 lks. dist., marked $\frac{1}{4}$ S1 BT

A yellow pine, 12 ins. in diam., bears S.56°W., 46 lks. dist., marked $\frac{1}{4}$ S2 BT

The original $\frac{1}{4}$ sec. cor. of secs. 1 and 2, bears S.70°12'W., 12.54 chs. dist. This cor. is an old mound of stone, from which,


A yellow pine, 28 ins. in diam., bears S.6 $\frac{1}{2}$ °W., 37 lks. dist., marked $\frac{1}{4}$ SBT

Desc. 18 ft. over NW.slope.

- 42.00 Old road, bears NE.and SW.
- 48.50 Head of wash, course W. Asc. 17 ft. over SW.slope.
- 50.30 Spur, slopes E. Desc. 107 ft. over NE.slope.
- 60.15 Wash, 15 lks. wide, course E. Asc. 122 ft. over S. slope.
- 69.10 Spur, slopes E. Desc. 28 ft. over NE.slope.
- 73.35 Wash, 10 lks. wide, course E. Asc. 77 ft. over S. slope.
- 78.40 Intersect the S. bdy. of sec. 36, T.14 N., R.3 W., at 10.82 chs. N. 89° 58' E. of the cor. of secs. 35 and 36, which is an iron post, 2 ins. in diam., marked and witnessed as described in the official record.

At point of intersection.

Set an iron post 3 ft. long, 2 ins. in diam., 2 ins. in the ground to bedrock, and in a mound of stone to top for closing cor. of secs. 1 and 2, with brass cap mkd.



from which,

A juniper, 19 ins. in diam., bears S.32 $\frac{1}{2}$ °E., 169 lks. dist., marked CCT13NR3WS1BT

Resurvey and Survey of the Subdivision Lines of T.13 N.R.3 W.

Chains

A yellow pine, 14 ins. in diam., bears S.18°W., 62 lks. dist., marked CCT13NR3WS2BT

Land, mountainous.

Soil, rocky 4th. rate.

Timber, yellow pine, oak, juniper, and aspen..

Undergrowth, oakbrush, manzanita, and mahogany.

From the cor. of secs. 34 and 35, on S. bdy. of Tp., which is an iron post 2 ins. in diam., marked and witnessed as described in the official record.

N.0°01'W., on true line, bet. secs. 34 and 35.

Over mountainous land, through dense timber and undergrowth.

Desc. 21 ft. over broken W. slope.

6.70 Wash, 10 lks. wide, course W. Asc. 59 ft. over SW.slope.


10.50 A yellow pine, 2 ft. in diam., on line.

13.45 Spur, slopes W. Desc. 22 ft. over N. slope.

18.65 Wash, 10 lks. wide, course SW. Asc. 164 ft. over SE.slope.

39.25 Spur, slopes E. Desc. 16 ft. over NE.slope.

40.00 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for the $\frac{1}{4}$ sec. cor. of secs. 34 and 35, with brass cap marked



from which,

A juniper, 20 ins. in diam., bears N.14 $\frac{1}{2}$ °E., 50 lks. dist., marked $\frac{1}{4}$ S35 BT

A juniper, 18 ins. in diam., bears S.52 $\frac{1}{2}$ °W., 90 lks. dist., marked $\frac{1}{4}$ S34 BT

Desc. 32 ft. over NE.slope.

41.40 Wash, 10 lks. wide, course E. Asc. 24 ft. over S. slope.

42.30 Spur, slopes E. Desc. 49 ft. over N. slope.

44.25 Wash, 15 lks. wide, course E. Asc. 121 ft. over SE.slope.

60.40 Spur, slopes SE. Desc. 16 ft. over NE.slope.

62.45 Head of wash, course NE. Asc. 58 ft. over SW.slope.

70.60 Spur, slopes SE. Desc. 173 ft. over NE.slope.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 16 ins. in the ground to bedrock, and in a mound of stone to top for the cor. of secs. 26, 27, 34, and 35, with brass cap marked

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains

T13NR3W	
S27	S26
S34	S35

1934

from which,

An oak, 9 ins. in diam., bears N. $76\frac{1}{2}^{\circ}$ W., 49 lks. dist., marked T13NR3WS27BT

A yellow pine, 20 ins. in diam., bears N. $44\frac{1}{2}^{\circ}$ E., 60 lks. dist., marked T13NR3WS26BT

A yellow pine, 14 ins. in diam., bears S. $44\frac{1}{2}^{\circ}$ E., 72 lks. dist., marked T13NR3WS35BT

A yellow pine, 8 ins. in diam., bears S. $29\frac{1}{2}^{\circ}$ W., 87 lks. dist., marked T13NR3WS34BT

Land, mountainous.

Soil, rocky 4th. rate.

Timber, yellow pine, oak, juniper and pinion.

Undergrowth, oakbrush, manzanita, and mahogany.

East, on a random line, bet. secs. 26 and 35.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.10 Intersect N. and S. line at 5 lks. N. of the cor. of secs. 25, 26, 35, and 36.

Thence,

N. $89^{\circ}58'$ W., on true line, bet. secs. 26 and 35.

Over mountainous land, through dense timber and undergrowth.

Desc. 114 ft. over SW. slope.

3.60 Head of wash, course S. Asc. 14 ft. over SE. slope.

4.60 Spur, slopes S. Desc. 130 ft. over SW. slope.

11.30 Head of wash, course S. Desc. 10 ft. over W. slope.

22.15 Wash, 15 lks. wide, course NW. Asc. 41 ft. over NE. slope.

24.10 Spur, near end slopes N. Desc. 225 ft. over W. slope.

32.50 Wash, 25 lks. wide, course S. Asc. 77 ft. over SE. slope.

40.05 Set an iron post 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, with a stone 5x5x2 ins. mkd. X deposited at base, and in a mound of stone to top, for the $\frac{1}{4}$ sec. cor. of secs. 26 and 35, with brass cap mkd.

$\frac{1}{4}$	S 26
	S 35

1934

No suitable bearing trees available.

Continue ascent of 19 ft. over SE. slope.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains

- 41.65 Spur, slopes S. Desc. 146 ft. over SW. slope.
- 55.80 Old road, bears N. and S.
- 56.10 Copper Creek, 30 lks. wide, course S. Asc. 149 ft. over NE. slope.
- 62.50 Short spur, slopes NE. Desc. 10 ft. over NW. slope.
- 63.85 Wash, 10 lks. wide, course NE. Asc. 149 ft. over SE. slope.
- 71.26 Wash, 10 lks. wide, course NE. Asc. 60 ft. over SE. slope.
- 73.15 Spur, slopes NE. Desc. 71 ft. over NW. slope.
- 77.30 Head of wash, course N. Asc. 65 ft. over NE. slope.
- 80.10 The cor. of secs. 26, 27, 34, and 35.


Land, mountainous.
 Soil, rocky 4th. rate.
 Timber, yellow pine, oak, juniper, and pinion.
 Undergrowth, oakbrush, manzanita, and mahogany.

N.0°01'W., on true line, bet. secs. 26 and 27.

Over mountainous land, through dense timber and undergrowth.

Desc. 194 ft. over NE. slope.

- 14.90 Foot of steep slope; across bottom of canyon.
- 15.00 Old road, bears NW. and SE.
- 16.00 Wire fence, bears E. and W.
- 19.70 Copper Creek, 30 lks. wide, course SE.
- 20.30 House, bears W. , about 2 chs. distant.
- 22.60 Wire fence, bears NW. and SE. Leave bottom, asc. 189 ft. over SW. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 17 ins. in the ground to bedrock, and in a mound of stone to top for the $\frac{1}{4}$ sec. cor. of secs. 26 and 27, with brass cap marked



An oak, 6 ins. in diam., bears East, 10 lks. dist., marked $\frac{1}{4}$ S26 BT

A yellow pine, 16 ins. in diam., bears S.65°W., 63 lks. dist., marked $\frac{1}{4}$ S27 BT

Asc. 18 ft. over SW. slope.

- 44.00 Spur, slopes SW. Desc. 40 ft. over NW. slope.


Resurvey and Survey of Subdivision Lines of T. 13 N., R. 3 W.

Chains	
48.50	Wash, 10 lks. wide, course SW. Asc. 593 ft. over SW. slope.
77.20	Spur, slopes W. Desc. 51 ft. over NW. slope.
80.00	Set an iron post 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bedrock, and in a mound of stone to top for the cor. of secs. 22, 23, 26, and 27, with brass cap marked
	T13NR3W S22 S23 S27 S26 1934
	from which,
	A yellow pine, 20 ins. in diam., bears N.27°W., 43 lks. dist., marked T13NR3WS22BT
	A juniper, 8 ins. in diam., bears N.65°E., 108 lks. dist., marked T13NR3WS23BT
	An oak, 6 ins. in diam., bears S.35½°E., 69 lks. dist., marked T13NR3WS26BT
	A juniper, 10 ins. in diam., bears S.41°W., 41 lks. dist., marked T13NR3WS27BT
	The original cor. of secs. 22, 23, 26, and 27, bears N.79°30'W., 9.87 chs. distant. This cor. is a stone 7x7x14 ins. above ground, firmly set, marked and witnessed as per official record. Alongside original cor. stone set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in the ground for Witness point for Tract 41, with brass cap marked.
	WP
	1934
	Land, mountainous. Soil, rocky. 4th. rate. Timber, yellow pine, oak, juniper, and pinion. Undergrowth, oak, rush, manzanita, and mahogany.
	S.89°58'E., on a random line, bet. secs. 23 and 26.
40.00	Set temp. ¼ sec. cor.
80.06	Intersect N. and S. line at 10 lks. S. of the cor. of secs. 23, 24, 25, and 26.
	Thence,
	S.89°58'W., on true line, bet. secs. 23 and 26.
	Over mountainous land, through dense timber and undergrowth.
	Desc. 81 ft. over W. slope.
3.55	Trail, bears NE, and SW.
4.65	Wash, 15 lks. wide, course S. Asc. 83 ft. over E. slope.
8.55	Spur, slopes S. Desc. 160 ft. over SW. slope.
16.75	Corral fence, bears N. and S.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.


Chains	
17.70	Wash, 15 lks. wide, course S. Asc. 220 ft. over E. slope.
18.60	Corral fence, bears N. and S.
20.95	Old road, bears N. and S. From which point, a spring bears N.14°E., 9.52 chs. distant.
32.60	Ridge, bears N. and S. Trail on same bears same; saddle lies to S. about 2 chs. dist. Desc. 85 ft. over W. slope.
36.06	Wash, 10 lks. wide, from SE. to W. Continue gradually down same.
39.85	Leave wash, turns NW. Asc. gradual NE. slope.
40.03	Set an iron post 3 ft. long, 1 in. in diam., 8 ins. in the ground to bedrock, with a stone 5x5x2 ins. mkd. X deposited at base of post, and in a mound of stone to top for $\frac{1}{4}$ sec. cor. of secs. 23 and 26, with brass cap marked $\frac{1}{4} \begin{array}{c} S 23 \\ S 26 \end{array}$ 1934 from which, A yellow pine, 12-ins. in diam., bears N.40 $\frac{1}{2}$ °E., 51 lks. dist., marked $\frac{1}{4}$ S23 BT. A yellow pine, 8 ins. in diam., bears S.31 $\frac{1}{2}$ °W., 7 lks. dist., marked $\frac{1}{4}$ S26 BT The original $\frac{1}{4}$ sec. cor. of secs. 23 and 26, which is a stone marked and witnessed as per official record, bears N.79°58'W., 10.04 chs. dist. Destroy same. Desc. 38 ft. over N. slope.
44.50	Wash, 10 lks. wide, course SW. Asc. 33 ft. over SE. slope.
51.60	Spur, slopes S. Desc. 89 ft. over SW. slope.
66.35	Wash, 10 lks. wide, course S. Asc. 21 ft. over SE. slope.
67.80	Spur, slopes S. Desc. 117 ft. over NW. slope.
76.05	Head of wash, course N. Asc. 11 ft. over NE. slope.
77.26	Spur, slopes N. Desc. 31 ft. over NW. slope.
80.06	The cor. of secs. 22, 23, 26, and 27. Land, mountainous. Soil, rocky 4th. rate. Timber, yellow pine, oak, juniper, and pinion. Undergrowth, oakbrush, manzanita, and mahogany.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains	
	N.0°01'W., on true line, bet. secs. 22 and 23.
	Over mountainous land, through dense timber and dense undergrowth.
	Asc. 64 ft. over SW. slope.
1.50	Spur, slopes NW. Desc. 66 ft. over N. slope.
6.20	Wash, 10 lks. wide, course NW. Asc. 135 ft. over SW. slope.
14.20	Spur, slopes NW. Desc. 151 ft. over N. slope.
21.71	Intersect line 4-5 of Tract 41, at 9.68 chs., S.89°58'E. of AP 4 thereof. Thence across patented land.
35.60	Spur, slopes W. Desc. 81 ft. over N. slope.
37.20	Wash, 20 lks. wide, course W. Small stream of running water in same. Asc. 35 ft. over S. slope.
40.00	Spur, slopes W. Set an iron post 3 ft. long, 1 in. in diam., 8 ins. in the ground to bedrock, and in a mound of stone to top for the 1/4 sec. cor. of secs. 22 and 23, with brass cap marked
	 <p>S22 S23 1934</p>
	from which,
	A yellow pine, 12 ins. in diam., bears N.41°W., 42 lks. dist., marked 1/4 S22 BT
	A yellow pine, 10 ins. in diam., bears N.67 1/4°E., 44 lks. dist., marked 1/4 S23 BT
	The original 1/4 sec. cor. of secs. 22 and 23, which is a stone marked and witnessed as per official record, bears N.80°14'W., 9.79 chs. dist. This cor. has been altered for tract cor. as hereinbefore described. From this cor. Government Spring bears Northeasterly about 3 1/2 chs. distant.
	Desc. 6 ft. over N. slope.
40.65	Wash, 10 lks. wide, course SW. Asc. 105 ft. over S. slope.
41.05	Telephone line, bears NE. and SW.
48.14	Power line, bears N.32 1/4°E., and S.32 1/4°W.
48.50	Spur, slopes SW. Desc. 25 ft. over NW. slope.
50.80	Head of wash, 10 lks. wide, course W. Asc. 44 ft. over SW. slope.
53.15	Spur, slopes SW. Desc. 7 ft. over NW. slope.
54.35	Wash, 15 lks. wide, course SW. Asc. 46 ft. over SE. slope.
55.45	Copper Basin road, bears NE. and SW.
58.20	End of spur, slopes E. Desc. 5 ft. over NE. slope.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

- Chains
- 59.00 Wash, 10 lks. wide, course SE. Asc. 141 ft. over S. slope.
- 61.66 Intersect line 1-2 of Tract 41, at 9.59 chs. N.89°56'E. of AP 2 thereof. Leave patented land.
- 69.30 Short spur, slopes E. ~~Asc.~~ 78 ft. over NE slope.
- 71.60 Head of wash, course E. Asc. 78 ft. over SE slope.
- 72.68 Wire fence, bears N.46°E. and S.76°W.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, and in a mound of stone to top for the cor. of secs. 14, 15, 22, and 23, with brass cap marked



1934

from which,

- A yellow pine, 12 ins. in diam., bears N.49°W., 62 lks. dist., marked T13NR3WS15BT
- A yellow pine, 16 ins. in diam., bears N.55½°E., 82 lks. dist., marked T13NR3WS14BT
- A juniper, 26 ins. in diam., bears S.15¼°E., 53 lks. dist., marked T13NR3WS22BT
- A juniper, 12 ins. in diam., bears S.30½°W., 98 lks. dist., marked T13NR3WS22BT

The original cor. of secs. 14, 15, 22, and 23, which is a stone marked and witnessed as per official record bears N.80°14'W., 9.73 chs. distant. Alongside this cor. stone set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the witness point to Tract 41, with brass cap marked

WP

1934

Land, mountainous.
 Soil, rocky 4th. rate.
 Timber, yellow pine, oak, juniper, and a few aspen.
 Undergrowth, oakbrush, manzanita, and mahogany.

- N.89°58'E., on a random line, bet. secs. 14 and 23.
- 40.00 Set temp. ¼ sec. cor.
- 80.08 Intersect N. and S. line at 7 lks. N. of the cor. of secs. 13, 14, 23, and 24.
- Thence,
- N.89°59'W., on true line, bet. secs. 14 and 23.
- Over mountainous land, through dense timber and dense undergrowth.
- Asc. 34 ft. over E. slope.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains

- 3.50 Spur, slopes NE. Desc. 160 ft. over NW. slope.
- 8.00 Slope changes to W.
- 13.00 Wash, 15 lks. wide, course NW. Asc. 43 ft. over NE. slope.
- 20.60 Spur, slopes NW. Desc. 39 ft. over SW. slope.
- 22.40 Wash, 14 lks. wide, course NW. Asc. 48 ft. over NE. slope.
- 28.50 Spur, slopes N. Desc. 19 ft. over NW. slope.
- 32.30 Telephone line, bears N.57½°E., and S.57½°W., in wash 15 lks. wide, course NE. Asc. 43 ft. over NE. slope.
- 35.90 Road to house bears NW. and SE.
- 36.50 House bears S. about 1 ch. distant.
- 37.00 Spur, slopes NE. Desc. 17 ft. over NW. slope.
- 38.80 Wash, 10 lks. wide, course NE. Asc. 10 ft. over SE. slope.
- 40.04 Set an iron post 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, and in a mound of stone to top for the ¼ sec. cor. of secs. 14 and 23, with brass cap marked

¼ S14
 S23
 1934

from which,

A yellow pine, 14 ins. in diam., bears N.43½°W., 92 lks. dist., marked ¼ S14 BT

A yellow pine, 12 ins. in diam., bears S.10½°E., 87 lks. dist., marked ¼ S23 BT

The original ¼ sec. cor. of secs. 14 and 23, which is a stone marked and witnessed as per official record, bears N.74°36'W., 9.75 chs. distant. Alongside this cor. set an iron post 3 ft. long, 1 in. in diam., 24 ins. in the ground for witness point to Tract 41, with brass cap marked

WP

1934

Asc. 163 ft. over SE. slope.
- 40.60 Power line, bears N.60°E. and S.60°W.
- 53.75 Copper Basin Hgy., bears N.10°E. and S.10°W.
- 58.35 Low spur, slopes N. Desc. 9 ft. over NW. slope.
- 60.90 Wash, 10 lks. wide, course NE. Asc. 23 ft. over SE. slope.
- 62.80 Spur, slopes S. Desc. 6 ft. over SW. slope.
- 63.80 Wash, 10 lks. wide, course SE. Asc. 56 ft. over NE. slope.
- 68.70 Wire fence, bears NE. and SW.
- 75.80 Ridge, bears NW. and SE. Desc. 10 ft. over SW. slope.
- 80.08 The cor. of secs. 14, 15, 22, and 23.

Resurvey and survey of Subdivision Lines of T. 13 N., R. 3 W.

Chains	
	Land, mountainous. Soil, rocky 4th. rate. Timber, yellow pine, oak, juniper, and aspen. Undergrowth, oakbrush, manzanita, and mahogany.
	N.0°01'W., on true line, bet. secs. 14 and 15. Over mountainous land, through dense timber and dense undergrowth. Asc. 45 ft. over gradual S. slope.
18.80	Slope changes to NE. Desc. gradually over same.
27.65	Wash, 10 lks. wide, course E. Asc. 18 ft. over S. slope.
28.30	Wire fence, bears E. and W.
30.85	Spur, slopes SE. Desc. 31 ft. over NE. slope.
37.20	Wash, 15 lks. wide, course E. Asc. 28 ft. over S. slope.
37.75	Old road, bears E. and W.
40.00	Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. of secs. 14 and 15, with brass cap marked
	from which,
	A yellow pine, 15 ins. in diam., bears S.46 $\frac{1}{2}$ °E., 15 lks. dist., marked $\frac{1}{4}$ S14 BT
	A yellow pine, 14 ins. in diam., bears S.83°W., 48 lks. dist., marked $\frac{1}{4}$ S15 BT
	A.P.2 of Tract 40 brs. N.82°25'E. 20.25 chs. dist. Asc. gradual S. slope.
41.00	Spur, slopes E. Desc. 131 ft. over NE. slope.
53.55	Wash, 15 lks. wide, course NE. Asc. 25 ft. over S. slope.
55.50	Spur, slopes SE. Desc. 12 ft. over NE. slope.
56.70	Head of wash, course SE. Asc. 22 ft. over SE. slope.
58.20	Spur, slopes E. Desc. 43 ft. over NE. slope.
61.70	Wash, 10 lks. wide, course E. Asc. 163 ft. over SE. slope.
75.80	Spur, slopes E. Desc. 31 ft. over N. slope.
80.00	Set an iron post 3 ft. long, 2 ins. in diam., 28 ins. in the ground for the cor. of secs. 10, 11, 14, and 15, with brass cap marked
	from which,
	A yellow pine, 12 ins. in diam., bears N.17 $\frac{1}{2}$ °W., 39 lks. dist., marked T13NR3WS10BT
	A yellow pine, 10 ins. in diam., bears N.54 $\frac{1}{2}$ °E., 45 lks. dist., marked T13NR3WS11BT

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains

A yellow pine, 15 ins. in diam., bears S. $41\frac{1}{2}^{\circ}$ E., 36 lks. dist., marked T13NR3WS14BT

A yellow pine, 12 ins. in diam., bears S. 50° W., 6 lks. dist., marked T13NR3WS15BT

Land, mountainous.

Soil, rocky 4th. rate.

Timber, yellow pine, oak, juniper, and pinion.

Undergrowth, oakbrush, manzanita, and mahogany.

S. $89^{\circ}59'$ E., on a random line bet. secs. 11 and 14.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.94 Intersect N. and S. line at 7 lks. S. of the cor. of secs. 11, 12, 13, and 14.

Thence,

S. $89^{\circ}58'$ W., on true line, bet. secs. 11 and 14.

Over mountainous land, through dense timber and undergrowth.

Desc. 16 ft. over SW. slope.

1.00 Wash, 20 lks. wide, course SE. Asc. 87 ft. over NE. slope.

1.45 Old road, bears NW. and SE.

6.30 End of spur, slopes ~~N.~~ Desc. 17 ft. over NW. slope.

8.25 Old road, bears NE. and SW.

13.75 Spur, near end, slopes S. Desc. 13 ft. over SW. slope.

15.21 Wash, 20 lks. wide, course SE. Asc. 173 ft. over NE. slope.

17.55 Old road, bears N. and S.

34.45 Spur, slopes N. Desc. 25 ft. over NW. slope.

37.95 Head of wash, course N. Asc. 18 ft. over NE. slope.

39.97 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone marked X deposited at base, and in a mound of stone to top for the $\frac{1}{4}$ sec. cor. of secs. 11 and 14, with brass cap marked

$\frac{1}{4}$ S 11

S 14

1934

No suitable bearing trees available.

Asc. 23 ft. over NE. slope.

41.55 End of spur, slopes N. Desc. 32 ft. over NW. slope.

45.15 Wash, 15 lks. wide, course NE. Asc. 159 ft. over SE. slope

62.65 End of spur, slopes SW. Desc. gradual SW. slope.

64.66 Wash, 15 lks. wide, course SE. Asc. 276 ft. over NE. slope.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains

79.94 The cor. of secs. 10, 11, 14, and 15.

Land mountainous.
Soil, rocky 4th. rate.
Timber, yellow pine, oak, juniper, and pinion.
Undergrowth, oakbrush, manzanita, and mahogany.

N.0°01'W., on true line, bet. secs. 10 and 11.

Over mountainous land, through dense timber and undergrowth.

~~Desc.~~ 14 ft. over ~~SE.~~ slope.

6.50 Ridge, bears N. and S.10°W. Desc. 39 ft. over W. slope.

12.40 Slope changes to NW. Desc. 124 ft. over NW. slope.

17.05 Head of wash, course W. Asc. gradual SW. slope.

19.10 Short spur, slopes W. Desc. 144 ft. over NW. slope.


27.65 Wash, 10 lks. wide, course NW. Asc. 8 ft. over SW. slope.

31.90 End of spur, slopes NW. Desc. 151 ft. over NW. slope.

35.00 Wash, 150 lks. wide, course NE. A spring is in this wash about 2 chs. SW.

39.60 Wash, 15 lks. wide, course NE. Asc. gradual SE. slope.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. of secs. 10 and 11, with brass cap marked



A yellow pine, 10 ins. in diam., bears N.65 $\frac{1}{4}$ °E., 55 lks. dist., marked $\frac{1}{4}$ S11 BT

An oak, 6 ins. in diam., bears S.38°W., 17 lks. dist., marked $\frac{1}{4}$ S10 BT

Asc. 98 ft. over ~~SE.~~ slope.

51.30 Spur, slopes E. Desc. 75 ft. over NE. slope.

52.20 Old road, bears NE. and SW.

55.25 Bend in old road, from NE. to SE.

59.45 Wash, 15 lks. wide, course E. Asc. 86 ft. over SE. slope.

71.30 Short spur, slopes E. Desc. 50 ft. over NE. slope.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bedrock, and in a mound of stone to top for cor. of secs. 2, 3, 10, and 11, with brass cap mkd.



Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains

from which,

An oak, 14 ins. in diam., bears N.80 $\frac{1}{2}$ °W., 81 lks. dist., marked T13NR3WS3BT

A yellow pine, 14 ins. in diam., bears N.1 $\frac{1}{2}$ °E., 51 lks. dist., marked T13NR3WS2BT

A yellow pine, 16 ins. in diam., bears S.7°W., 57 lks. dist., marked T13NR3WS10BT

A yellow pine, 10 ins. in diam., bears S.41 $\frac{1}{2}$ °E., 86 lks. dist., marked T13NR3WS11BT

Land, mountainous.
Soil, rocky 4th. rate.
Timber, yellow pine, oak, juniper, and aspen.
Undergrowth, oakbrush, manzanita, and mahogany.

N.89°58'E., on a random line, bet. secs. 2 and 11.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.10 Intersect N. and S. line at 5 lks. N. of the cor. of secs. 1, 2, 11, and 12.

Thence,

West, on true line, bet. secs. 2 and 11.

Over mountainous land, through dense timber and undergrowth.

Asc. slight E. slope.


1.00 Spur, slopes N. Desc. 22 ft. over NW slope.

7.25 Wash, 40 lks. wide, course N.60°E. Asc. 87 ft. over NE slope.

15.45 Spur, slopes SE. Desc. 36 ft. over SW slope.

19.40 Wash, 10 lks. wide, course S.50°E. Asc. 202 ft. over NE slope.

40.05 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, and in a mound of stone to top for $\frac{1}{4}$ sec. cor. of secs. 2 and 11, with brass cap mkd.



1934

from which,

A juniper, 7 ins. in diam., bears N.26 $\frac{1}{2}$ °E., 26 lks. dist.; marked $\frac{1}{4}$ S2 BT


A juniper, 10 ins. in diam., bears S.54°W., 49 lks. dist., marked $\frac{1}{4}$ S11 BT

Asc. 177 ft. over NE slope.

54.60 Slope changes to SE.

67.60 Asc. along NE slope.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains	
69.47	Old road, bears N.20°E. and S.20°W.
80.10	The cor. of secs. 2, 3, 10, and 11.
<p>Land, mountainous. Soil, rocky 4th. rate. Timber, yellow pine, oak, juniper, and aspen. Undergrowth, oakbrush, manzanita, and mahogany.</p>	
<p>N.0°01'W., on true line, bet. secs. 2 and 3.</p>	
<p>Over mountainous land, through dense timber and undergrowth. Desc. 11 ft. over N. slope.</p>	
1.20	Head of wash, course NE. Asc. 33 ft. over SE. slope.
4.45	Spur, slopes E. Desc. 52 ft. over N. slope.
8.80	Head of wash, course W. Asc. 80 ft. over SW. slope.
14.00	Spur, slopes W. Desc. 64 ft. over NW. slope.
17.10	Head of wash, course W. Asc. 44 ft. over SW. slope.
21.30	Spur, slopes NW. Desc. 253 ft. over N. slope.
31.05	Wash, 14 lks. wide, course N.40°W. Asc. gradual SW. slope.
32.70	Spur, slopes W. Desc. 53 ft. over NW. slope.
39.55	Old road, bears N.80°W. and N.85°E.
40.00	Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, and in a mound of stone to top for the 1/4 sec. cor. of secs. 2 and 3, with brass cap mkd.
<p style="text-align: center;">  </p>	
<p>A black jack, 12 ins. in diam., bears N.60°W., 75. lks. dist., marked 1/4 S3 BT</p>	
<p>A yellow pine, 8 ins. in diam., bears S.63 1/2°E., 26 lks. dist., marked 1/4 S2 BT</p>	
<p>Desc. 18 ft. over NW. slope.</p>	
41.60	Wash, 10 lks. wide, course N.15°W.; asc. gradual SW. slope.
43.00	Spur, slopes W. Desc. 155 ft. over NW. slope.
58.60	Wash, 30 lks. wide, course N.25°E. Asc. 38 ft. over SE. slope.
60.47	Road, bears N.12°E. and S.35°W.
68.50	End of spur, slopes E. Desc. 36 ft. over NE. slope.
71.10	Wash, 15 lks. wide, course S.50°E. Asc. 87 ft. over SE. slope.


Resurvey and Survey of Subdivision Lines of T. 13 N., R. 3 W.

Chains

- 78.60 Intersect the S. bdy. of sec. 35, T.14 N., R.3 W., at 10.54 chs. N.89°58'E. of the cor. of secs. 34 and 35, which is an iron post marked and witnessed as described in the official record.
- At point of intersection,
- Set an iron post 3 ft. long, 2 ins. in diam., 22 ins. in the ground to bedrock, and in a mound of stone to top for closing cor. of secs. 2 and 3, with brass cap mkd.
- T14NR3WS35
- | | |
|------|-----|
| S3 | S2 |
| T13N | R3W |
| CC | |
| 1934 | |
- from which,
- A yellow pine, 14 ins. in diam., bears S.22½°E., 79 lks. dist., marked T13NR3WS2CCBT
- A yellow pine, 16 ins. in diam., bears S.5½°W., 70 lks. dist., marked T13NR3WS3CCBT
- Land, mountainous.
Soil, rocky 4th. rate.
Timber, yellow pine, oak, juniper, and aspen.
Undergrowth, oakbrush, manzanita, and mahogany.
-
- From the cor. of secs. 33 and 34, on S. bdy. of Tp., which is an iron post 2 ins. in diam., marked and witnessed as described in the official record.
- N.0°01'W., on true line, bet. secs. 33 and 34.
- Over mountainous land, through scattering timber and dense undergrowth.
- Desc. 50 ft. over NW. slope.
- 4.05 Head of wash, course W. Asc. 106 ft. over broken SW. slope.
- 5.76 Intersect the SE. end line (2-3) of the Orphan pat. lode mining claim, Min. Sur. No. 3275 A, at 1.86 chs., N.66°28'E., from Cor. No. 3, thereof. Across patented mineral land.
- 17.95 Spur, slopes W. Desc. 73 ft. over NW. slope.
- 26.05 Head of wash, course W. Asc. 121 ft. over broken SW. slope.
- 28.54 Intersect the NE. side line, (1-2) of the Orphan pat. lode mining claim, Min. Sur. No. 3275A, at 1.78 chs., S.18°36'E., of cor. No. 1 thereof. Leave patented mineral land.
- 33.15 Old road, bears NE. and SW.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 22 ins. in the ground to bedrock, with a stone 6x6x4 ins. mkd. X deposited at base, and in a mound of stone to top for ¼ sec. cor. of secs. 33 and 34, with brass cap marked

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains




No bearing trees available.

USEM. No. 3275, which is a granite stone 8x12x6 ins. above ground, firmly set, marked and witnessed as described in the official record bears S. 33 1/2° E., 14.78 chs. dist.

Asc. 17 ft. over S. slope.

- 42.00 Ridge bears NE. and SW. Desc. 45 ft. over N. slope.
- 44.25 Head of wash, course E. Asc. 24 ft. over S. slope.
- 52.50 Ridge, bears NE. and SW. Desc. 253 ft. over NW. slope.
- 70.70 Wash, 15 lks. wide, course NW. Asc. 21 ft. over SW. slope.
- 74.40 Short spur, slopes W. Desc. 80 ft. over N. slope.
- 76.55 Wash, 15 lks. wide, course W. Asc. 54 ft. over SW. slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, deposit a stone 8x8x2 ins. mkd. X at base of post, and in a mound of stone to top for cor. of secs. 27, 28, 33, and 34, with brass cap mkd.



1934
No bearing trees available.

Land, mountainous.
Soil, rocky 4th. rate.
Timber, yellow pine, oak, pinion, and juniper.
Undergrowth, oakbrush, manzanita, and mahogany.

East, on a random line, bet. secs. 27 and 34.

- 40.00 Set temp. 1/2 sec. cor.
- 80.22 Intersect the cor. of secs. 26, 27, 34, and 35.

Thence,

West, on true line; bet. secs. 27 and 34.

Over mountainous land, through dense timber and dense undergrowth.

Asc. 251 ft. over NE. slope.

- 19.25 Ridge, bears NW. and SE. Desc. 55 ft. over SW. slope.
- 31.25 Head of wash, course SE. Asc. 17 ft. over E. slope.
- 32.81 Intersect the SE. end line, (3-4) of the "Sink to Rise" pat. lode mining claim, Min. Sur. No. 3296; at 4.09 chs., S. 17° 25' W. from Cor. No. 3., thereof. Across patented mineral land.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W. 4089

BOOK

4089

Chains	
40.11	<p>Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of secs. 27 and 34, with brass cap mkd.</p> <p style="text-align: center;"> $\frac{1}{4}$ $\frac{S\ 27}{S\ 34}$ 1934 </p> <p style="text-align: right;">from which</p> <p>A yellow pine, 12 ins. diam., bears N.15°E., 17 lks. dist., marked $\frac{1}{4}$ S27 BT.</p> <p>An oak, 12 ins. diam., bears S.75°E., 42 lks. dist., marked $\frac{1}{4}$ S34 BT.</p> <p>Asc. 35 ft. over E. slope.</p>
44.22	Spur, slopes S.; desc. 17 ft. over W. slope.
47.20	Wash, 10 lks. wide, course S.; asc. 23 ft. over SE. slope.
49.20	Old road, bears N. and S.
49.42	Intersect SW. side line (4-1) of pat. lode mining claim "Sink To Rise" Mineral Survey No. 3296, at 6.85 chs., S.72°35'E., of Cor. No. 1 thereof. Leave patented mineral land.
51.70	Spur, slopes SW.; desc. 18 ft. over SW. slope.
55.70	Wash, 10 lks. wide, course SE.; asc. 33 ft. over SE. slope.
60.20	Ridge, bears N. and S.; desc. 146 ft. over NW. slope.
69.30	Wash, 15 lks. wide, course N.; asc. 30 ft. over E. slope.
71.00	Spur, slopes N.; desc. 136 ft. over W. slope.
80.22	<p>The cor. of secs. 27, 28, 33 and 34.</p> <p>Land, mountainous. Soil, rocky 4th. rate. Timber, yellow pine, oak, juniper and pinion. Undergrowth, oakbrush, manzanita and mahogany.</p>
15.90	<p>N.0°01'W., on true line, bet. secs. 27 and 28.</p> <p>Over mountainous land, through dense timber and undergrowth.</p> <p>Desc. 268 ft. over NW. slope.</p>
19.08	<p>Wash, 20 lks. wide, course W.; asc. 277 ft. over SW. slope.</p> <p>Intersect the SW. side line, (1-2) of "Hopeful" unpatented lode mining claim, Min. Sur. No. 3296 at 7.07 chs. N.60°07'W. of Cor. No. 1 thereof. Thence across said claim.</p>
29.38	<p>Intersect the NE. side line, (3-4) of "Hopeful" unpatented lode mining claim, at 10.26 chs. N.60°07'W. of Cor. No. 4 thereof. Leave said claim.</p>
30.85	Old road, bears NE. and SW.
31.60	Spur, slopes NW.; desc. 143 ft. over NE. slope.

Resurvey and Survey of Subdivision Lines of T. 13 N., R. 3 W.

Chains									
36.10	Wash, 15 lks. wide, course W.; asc. 84 ft. over SW. slope.								
40.00	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for the $\frac{1}{4}$ sec. cor. of secs. 27 and 28, with brass cap marked								
	$\frac{1}{4}$ S28 S27 1934								
	No suitable bearing trees available; raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.								
	Asc. 250 ft. over SW. slope.								
44.60	Telephone line, bears N. $71\frac{1}{2}^{\circ}$ E. and S. $71\frac{1}{2}^{\circ}$ W.								
52.30	Spur, slopes W.; desc. 29 ft. over NW. slope.								
57.30	Head of wash, course SW.; asc. 106 ft. over S. slope.								
61.58	Intersect the SE. side line, (1-2) of the "Ague" patented lode mining claim, Min. Sur. No. 3425 at 41 lks. N. $53^{\circ} 49'$ E., of Cor. No. 2 thereof. Across patented mineral land.								
64.60	Spur, slopes NW.; desc. 365 ft. over N. slope.								
78.11	Intersect the NE. side line, (4-1) of the "Fair View" pat. lode mining claim, Min. Sur. No. 3425, at 5.10 chs. N. $67^{\circ} 34'$ W. of Cor. No. 1 thereof. Leave patented mineral land.								
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bedrock, deposit a stone 6x6x3 ins. mkd. X at base of post, and in a mound of stone to top, for cor. of secs. 21, 22, 27 and 28, with brass cap mkd.								
	<table border="1" style="margin: auto;"> <tr> <td>T13N</td> <td>R3W</td> </tr> <tr> <td>S21</td> <td>S22</td> </tr> <tr> <td colspan="2" style="text-align: center;">-----</td> </tr> <tr> <td>S28</td> <td>S27</td> </tr> </table> 1934	T13N	R3W	S21	S22	-----		S28	S27
T13N	R3W								
S21	S22								

S28	S27								
	No suitable bearing trees available.								
	Land, mountainous. Soil, rocky 4th. rate. Timber, yellow pine, oak, juniper and pinion. Undergrowth, oakbrush, manzanita and mahogany.								
	East, on a random line bet. secs. 22 and 27.								
40.00	Set temp. $\frac{1}{4}$ sec. cor.								
80.16	Intersect the cor. of secs. 22, 23, 26 and 27.								
	Thence								
	West, on true line, bet. secs. 22 and 27								
	Over mountainous land, through dense timber and undergrowth.								
	Asc. 10 ft. over NE. slope.								

Resurvey and Survey of Subdivision Lines of T. 13 N., R. 3 W.

Chains	
1.00	Spur, slopes N.; desc. 8 ft.
2.20	Wash, 10 lks. wide, course NE.; asc. 15 ft.
3.10	Spur, slopes N.; desc. 12 ft.
4.30	Wash, 10 lks. wide, course NE.; asc. 6 ft.
4.80	Spur, slopes N.; desc. 22 ft. over NW. slope.
6.05	Wash, 10 lks. wide, course N.; asc. 55 ft. over NE. slope.
10.85	Spur, slopes NW.; desc. 522 ft. over SW. slope, to creek,
17.50	Change to W. slope.
27.60	Copper Creek, 20 lks. wide, course SW.; asc. 74 ft. over SE. slope.
33.55	Ridge, bears N.5°E. and S.5°W.; Copper Basin road, follows ridge. Saddle in ridge, bears 150 lks. S.; from saddle road branch S. to Old Catoclin mine and SE. to "White Spar" highway. Desc. 115 ft. over W. slope.
34.14	Telephone line, bears N.40°E. and S. 40°W.
38.60	Power line, bears N.40°E. and S.40°W.
40.08	Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4} \begin{array}{l} S 22 \\ \hline S 27 \end{array}$
	1934
	from which
	A yellow pine, 30 ins. diam., bears N.72°E., 39 lks. dist., mkd. $\frac{1}{4}$ S22 BT.
	A yellow pine, 24 ins. diam., bears S.24 $\frac{1}{2}$ °E., 53 lks. dist., mkd. $\frac{1}{4}$ S27 BT.
	Desc. 44 ft. over NW. slope.
41.95	Wash, 10 lks. wide, course N.; asc. 87 ft. over NE. slope.
47.91	Copper Basin highway, bears NW. and SE.
49.90	Spur, slopes N.; desc. 40 ft. over NW. slope.
51.90	Wash, 10 lks. wide, course N.; asc. 43 ft. over NE. slope.
57.25	Spur, slopes NW.; desc. 275 ft. over SW. slope.
67.14	Intersect the NE. end line (1-4 line) of the "Ague" patented lode claim, Mineral Survey No. 3425, at a point 1.82 chs. S.46°28'E. of the true point for its Cor. No. 4, which is 22 lks. N.45°W. from the witness cor. thereto, the said corner point being in the Copper Basin highway. Thence over patented mineral land.
68.67	Copper Basin highway, bears NE. and S.
70.18	Intersect the NW. side line (3-4 line) of the "Ague" patented lode claim, Mineral Survey No. 3425, at a point 2.13 chs. S.53°42'W. of the true point for Cor. No. 4, thereof. Leave patented mineral land.
70.67	Water trough at end of pipe line carrying small stream of water bears S.6°41'E., 3.28 chs. dist.

Resurvey and Survey of Subdivision Lines of T. 13 N., R. 3 W.

Chains	
71.50	Wash, 15 lks. wide, course NW.; asc. 69 ft. over ^{NE} SW. slope.
73.35	Copper Basin highway, bears NW. and SE.
76.25	Spur, slopes N.; desc. 29 ft. over W. slope.
78.00	Wash, 10 lks. wide, course N.; asc. 39 ft. over NE. slope.
80.16	The cor. of secs. 21, 22, 27 and 28. Land, mountainous. Soil, rocky 4th. rate. Timber, yellow pine, oak, juniper and pinion. Undergrowth, oakbrush, manzanita and mahogany.
	N.0°01'W., bet. secs. 21 and 22. Desc. 247 ft. over NW. slope; through heavy timber and dense undergrowth.
5.17	Telephone line, bears S.80°E. and N.80°W.
6.90	Copper Basin highway, bears E. and W.
8.80	Wash, 10 lks. wide, course NW.; asc. 9 ft.
13.50	Spur, slopes W.; desc. 114 ft.
22.30	Wash, 10 lks. wide, course NW.; asc. 51ft. over SW. slope.
29.90	Spur, slopes W.; desc. 14 ft.
32.75	Wash, 10 lks. wide, course W.; asc. 95 ft. over SW. slope.
37.80	Shallow draw, course SW.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bedrock, with a stone 4x4x2 ins. mkd. X, deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd. $\frac{1}{4}$ S21 S22 1934 No suitable bearing trees available. Continue ascent of 117 ft. over SW. slope.
46.90	Spur, slopes W.; desc. 14 ft. over NW. slope.
49.10	Wash, 10 lks. wide, course SW.; asc. 50 ft. over SW. slope.
53.00	Spur, slopes SW.; desc. 84 ft. over NW. slope.
57.10	Wash, 20 lks. wide, course SW.; asc. 209 ft. over SW. slope.
65.50	Spur, slopes W.; desc. 558 ft. over gradual NW. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bedrock, with a stone 5x5x2 ins. mkd. X, deposited at base, and in a mound of stone to top, for cor. of secs. 15, 16, 21 and 22, with brass cap mkd.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains

T13NR3W
 S16 | S15
 S21 | S22

1934

No suitable bearing trees available.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, yellow pine, oak, juniper, and pinion.

Undergrowth, oakbrush, manzanita, and mahogany.

East, on a random line, bet. secs. 15 and 22.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.12 Intersect N. and S. line at 2 lks. S. of cor. of secs. 14, 15, 22, and 23.

Thence,

S.89°59'W., on true line, bet. secs. 15 and 22.

Over mountainous land, through ~~dense~~ timber and ~~dense~~ undergrowth.

Desc. 35 ft. over SW. slope.

3.40 Wash, 10 lks. wide, course S. Asc. 39 ft. over E. slope.

6.00 Spur, slopes S. Desc. 30 ft. over SW. slope.

7.90 Wash, 10 lks. wide, course S. Asc. 12 ft. over SE. slope.

9.90 Spur, slopes S. Desc. 71 ft. over SW. slope.

18.30 Spur, slopes S. Desc. 50 ft. over SW. slope.

22.70 Wash, 10 lks. wide, course S. Asc. 16 ft. over SE. slope.

25.90 Spur, slopes S. Desc. 18 ft. over SW. slope.

28.10 Wash, 10 lks. wide, course S. Asc. 18 ft. over SE. slope.

30.90 Spur, slopes S. Desc. 86 ft. over SW. slope.

34.51 Wire fence, bears NE. and SW.

40.06 Set an iron post 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of secs. 15 and 22, with brass cap mkd.

$\frac{1}{4}$ S15
 S22

1934

from which,

A yellow pine, 12 ins. in diam., bears N.73 $\frac{1}{2}$ °W., 26 lks. dist., marked $\frac{1}{4}$ S15 BTA yellow pine, 8 ins. in diam., bears S.7 $\frac{1}{4}$ °W., 28 lks. dist., marked $\frac{1}{4}$ S 22 BT

Desc. 513 ft. over W. slope.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains	
57.45	Wash, 15 lks. wide, course SW. Asc. gradual SE. slope.
58.90	Spur, slopes S. Desc. 348 ft. over SW. slope.
73.45	Wash, 10 lks. wide, course NW. Asc. 14 ft. over NE. slope.
75.75	Spur, slopes N. Desc. 75 ft. over NW. slope.
80.12	The cor. of secs. 15, 16, 21, and 22.
	<p>Land, mountainous. Soil, rocky 4th. rate. Timber, yellow pine, oak, and juniper. Undergrowth, oakbrush, manzanita, and mahogany.</p>
	N.0°01'W., on true line, bet. secs. 15 and 16.
	<p>Over mountainous land, through dense timber and dense undergrowth. Desc. 17 ft. over NW. slope.</p>
2.40	Wash, 10 lks. wide, course W. Asc. 39 ft. over SW. slope.
11.00	Spur, slopes W. Desc. 57 ft. over NW. slope.
13.26	Wash, 10 lks. wide, course W. Across rolling W. slope.
19.20	Cave house bears NW. about 2 chs. dist.
24.45	Wash, 10 lks. wide, course SW. Asc. 49 ft. over SE. slope.
27.55	Spur, slopes W. Road on same bears same. Desc. 54 ft. over NW. slope.
29.80	Wash, 25 lks. wide, course SW. Asc. gradual SE. slope.
40.00	<p>Spur, slopes W. Set an iron post 3 ft. long, 1 in. in diam. on bedrock, and in a mound of stone to top for $\frac{1}{2}$ sec. cor. of secs. 15 and 16, with brass cap mkd.</p>
	<p style="text-align: center;"> $\frac{1}{2}$ S16 S15 1934 </p>
	from which,
	An oak, 7 ins. in diam., bears N.19°E., 67 lks. dist., marked $\frac{1}{2}$ S15 BT
	An oak, 8 ins. in diam., bears S.71°45'W., 19 lks. dist., marked $\frac{1}{2}$ S16 BT
	Desc. 14 ft. over NW. slope.
41.40	Wash, 15 lks. wide, course SW. Asc. 67 ft. over SE. slope.
57.50	Ridge, bears W. Desc. 7 ft. over NW. slope.
62.70	Wash, 15 lks. wide, course NW. Asc. 40 ft. over SE. slope.
72.20	Spur, slopes SW. Desc. 24 ft. over NW. slope.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains

73.85 Wash, 10 lks. wide; course W. Asc. 40 ft. over SE. slope.

76.00 Spur, slopes W. Desc. 13 ft. over NW. slope.

79.35 Wash, 10 lks. wide, course SW. Asc. gradual SE. slope.

80.00 Set an iron post 3 ft. long; 2 ins. in diam., 18 ins. in the ground to bedrock, with a stone 6x6x3 ins. mkd. X deposited at base, and in a mound of stone to top for cor. of secs. 9, 10, 15, and 16, with brass cap marked

T13NR3W
S9 | S10
S16 | S15

1934

No. suitable bearing trees available.

Land, mountainous.
Soil, rocky 4th. rate.
Timber, yellow pine, pinion, and oak.
Undergrowth, oakbrush, manzanita, and mahogany.

N. 89° 59' E.; on a random line, bet. secs. 10 and 15.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.12 Intersect N. and S. line at 2 lks. N. of cor. of secs. 10, 11, 14, and 15.

Thence,

West, on true line, bet. secs. 10 and 15.

Over mountainous land, through dense timber and dense undergrowth.

Desc. 75 ft. over NW. slope.

10.85 Wash, 10 lks. wide, course N. Asc. 31 ft. over NE. slope.

13.40 End of spur, slopes N. Desc. 104 ft. over NW. slope.

21.15 Wash, 15 lks. wide, course NW. Asc. 7 ft. over NE. slope.

23.75 Spur, slopes N. Desc. 32 ft. over W. slope.

25:70 Wash, 20 lks. wide, course NW. Asc. 131 ft. over NE. slope.

39.30 Trail, bears NW. and SE.

40.06 Ridge, bears NW. and SE.
Set an iron post 3 ft. long; 1 in. in diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. of secs. 10 and 15, with brass cap marked

S 10
S 15

1934

No suitable bearing trees available; raise a mound of stone 4 ft. base, 2 ft. high N. of cor.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains

Desc. 312 ft. over SW. slope.

57.50 Wash, 10 lks. wide, course SW. Asc. gradual SE. slope.

59.20 Spur, slopes S. Desc. 144 ft. over SW. slope.

66.90 Wash, 10 lks. wide, course SW. Asc. 47 ft. over SE. slope.

71.45 Spur, slopes SW. Desc. 270 ft. over W. slope.

80.12 The cor. of secs. 9, 10, 15, and 16.

Land, mountainous.
Soil, rocky 4th. rate.
Timber, yellow pine, oak, juniper, and pinion.
Undergrowth, oakbrush, manzanita, and mahogany.

N.0°01'W., on true line, bet. secs. 9 and 10.

Over mountainous land, through dense timber and undergrowth.

Asc. 60 ft. over S. slope.


2.45 Spur, slopes SW. Desc. 49 ft. over NW. slope.

11.20 Wash, 15 lks. wide, course NW. Asc. 33 ft. over SW. slope.

12.20 Spur, slopes W. Desc. 30 ft. over NW. slope.

13.00 Wash, 20 lks. wide, course W. Asc. 234 ft. over SW. slope.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, with a stone mkd. X deposited at base, and in a mound of stone to top for sec. cor. secs. 9 and 10, with brass cap mkd.



1934

No suitable bearing trees available.

Asc. 179 ft. over SW. slope.


53.10 Shallow wash, 10 lks. wide, course SW. Asc. 192 ft. over SW. slope.

61.75 Ridge, bears E. and W. Saddle bears E. 1 ch. dist. Desc. 207 ft. over N. slope.

62.50 Trail, bears E. and W.

78.75 Wash, 10 lks. wide, course E. Asc. gradual SE. slope.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 25 ins. in the ground for cor. of secs. 3, 4, 9, and 10, with brass cap marked



1934

from which,

Resurvey and Survey of Subdivision Lines of T.13 N. R.3 W.

Chains

An oak, 12 ins. in diam., bears N.24 $\frac{1}{2}$ °W., 39 lks. dist., marked T13NR3WS4BT

An oak, 10 ins. in diam., bears N.88 $\frac{1}{4}$ °E., 76 lks. dist., marked T13NR3WS3BT

A yellow pine, 16 ins. in diam., bears S.65 $\frac{1}{2}$ °E., 72 lks. dist., marked T13NR3WS10BT

A yellow pine, 6 ins. in diam., bears S.71°W., 57 lks. dist., marked T13NR3WS9BT

Land, mountainous.
Soil, rocky 4th. rate.
Timber, yellow pine, oak, juniper, and cherry.
Undergrowth, oakbrush, manzanita, and mahogany.

East, on a random line, bet. secs. 3 and 10.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.16 Intersect N. and S. line at 23 lks. S. of cor. of secs. 2, 3, 10, and 11.

Thence,

S.89°50'W., on true line, bet. secs. 3 and 10.

Over mountainous land, through dense timber and dense undergrowth.

Asc. 14 ft. over NE.slope.

2.00 Ridge, bears N. and S. Desc. 12 ft. over NW.slope.

3.50 Head of wash, course NW. Asc. 17 ft. over NE.slope.

7.00 Spur, slopes NW. Desc. 140 ft. over SW.slope.

12.70 Wash, 15 lks. wide, course N. Asc. 161 ft. over NE.slope.

19.45 End of spur, slopes N. Desc. 122 ft. over NW.slope.

25.80 Wash, 10 lks. wide, course N. Asc. 64 ft. over NE.slope.

29.15 End of spur, slopes N. Desc. 94 ft. over NW.slope.

34.30 Wash, 15 lks. wide, course NE. Old road alongside wash on W. side, bears same. Asc. 99 ft. over SE.slope.

40.08 Set an iron post 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, with a stone 5x4x2 ins. mkd. X deposited at base, and in a mound of stone to top for $\frac{1}{4}$ sec. cor. of secs. 3 and 10, with brass cap mkd.

$\frac{1}{4}$ S3
S10

1934


No suitable bearing trees available.

Asc. 197 ft. over SE.slope.

54.05 Old road, bears NE. and SW.

56.00 Spur, slopes NE. Desc. 168 ft. over NW.slope.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains	
72.75	Wash, 10 lks. wide, course NW. Asc. gradual NE. slope.
73.40	Spur, slopes NW. Desc. 103 ft. over NW. slope.
78.00	The Silver Lode mine tunnel, bears S. about 1 ch. dist.
78.65	Wash, 30 lks. wide, course N. Asc. 20 ft. over E. slope.
80.16	The cor. of secs. 3, 4, 9, and 10. Land, mountainous. Soil, rocky 4th. rate. Timber, yellow pine, oak, juniper, and pinion. Undergrowth, oakbrush, manzanita, and mahogany.
	N.0°01'W., on true line, bet. secs. 3 and 4. Over mountainous land, through dense timber and undergrowth. Asc. 22 ft. over SE. slope.
4.00	Spur, slopes E. Desc. 168 ft. over broken NE. slope.
21.40	Road, bears NE. and SW.
23.60	Road, bears NE. and SW.
29.35	Wash, 10 lks. wide, course E. Asc. 21 ft. over SE. slope.
30.80	Spur, slopes E. Desc. 52 ft. over NE. slope.
35.06	Intersect line 3-4 of Tract 37 at 9.42 chs. N.88°37'E., of A.P.3 thereof. Across patented land.
35.10	Fence, bears N.75°W. and S.75°E.
40.00	Set an iron post 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, and in a mound of stone to top for $\frac{1}{4}$ sec. cor. of secs. 3 and 4, with brass cap mkd. <div style="text-align: center;">  </div> from which, A yellow pine, 10 ins. in diam., bears N.60 $\frac{1}{2}$ °E., 38 lks. dist., marked $\frac{1}{4}$ S3 BT A yellow pine, 14 ins. in diam., bears N.81 $\frac{1}{2}$ °W., 65 lks. dist., marked $\frac{1}{4}$ S4 BT Desc. 95 ft. over NW. slope.
44.10	Fence, bears N.75°W. and S.75°E.
52.50	Fence, bears N.60°E. and S.60°W.
53.40	Wash, 10 lks. wide, course NE. Asc. 23 ft. over SE. slope.
58.10	Fence, bears N.52°E. and S.52°W.
62.42	Spur, slopes E. Desc. 16 ft. over NW. slope.


Resurvey and Survey of Subdivision Lines, of T.13 N., R.3 W.

Chains									
64.00	Wash, 10 lks. wide, 4 ft. deep, course E., Asc. 46 ft. over SE. slope.								
65.00	Fence, bears N.54°E. and S.54°W.								
65.40	Road, bears NE. and SW.								
67.90	Low spur, slopes E. Desc. gradual NE. slope.								
72.00	Old road, bears E. and W.								
74.95	Intersect line 1-2 of Tract 34, at 8.71 chs. S.89°34'E. of A.P. 2 thereof. Thence across Tract 44 of T. 14 N., R. 3 W.								
78.69	Intersect S. bdy. of sec. 34, T.14 N., R.3 W., at 10.29 chs. N.89°58'E. of cor. of secs. 33 and 34, which is an iron post marked and witnessed as described in the official record. At point of intersection. set an iron post 3 ft. long, 2 ins. in diam., 27 ins. in the ground for closing corner of secs. 3 and 4, with brass cap marked								
	T14NR3W S34								
	<table border="1"> <tr> <td>S4</td> <td>S3</td> </tr> <tr> <td>T13N</td> <td>R3W</td> </tr> <tr> <td colspan="2" style="text-align: center;">C C</td> </tr> <tr> <td colspan="2" style="text-align: center;">1934</td> </tr> </table>	S4	S3	T13N	R3W	C C		1934	
S4	S3								
T13N	R3W								
C C									
1934									
	from which,								
	A yellow pine, 20 ins. in diam., bears S.23°E., 30 lks. dist., marked T13NR3WS3CCBT								
	An oak, 14 ins. in diam., bears S.6½°W., 79 lks. dist., marked T13NR3WS4CCBT								
	Land, mountainous. Soil, rocky 4th. rate. Timber, yellow pine, oak, juniper, and piñon. Undergrowth, oakbrush, manzanita, and mahogany.								
	From the cor. of secs. 32 and 33, on S. bdy. of Tp., which is an iron post marked and witnessed as described in the official record.								
	Thence,								
	N.0°02'W., on true line, bet. secs. 32 and 33.								
	Over mountainous land, through scattering timber and dense undergrowth.								
0.90	Spur, slopes W. Desc. 6 ft. over N. slope.								
2.85	Wash, 10 lks. wide, course W. Asc. 17 ft. over S. slope.								
7.75	Top of round knoll; from which, Merrills ranch house, bears N.69½°W. Desc. 12 ft. over N. slope.								
10.75	Wash, 10 lks. wide, course W. Asc. 38 ft. over S. slope.								
13.50	Spur, slopes W. Desc. 38 ft. over N. slope.								

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains


- 16.10 Wash, 30 lks. wide, course W. Asc. 55 ft. over S. slope.
- 21.00 Spur, slopes W. Desc. gradual N. slope.
- 25.60 Wash, near head, course W. Asc. 15 ft. over S. slope.
- 28.60 Spur, slopes W. From which, Merrills house bears S.86°W. Desc. 60 ft. over NW. slope.
- 34.80 Wash, near head, course NW. Asc. gradual SW. slope.
- 39.00 Spur, slopes NW. Desc. gradual NE. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 15 ins. in the ground to bedrock, with a stone 5x5x2 ins. mkd. X deposited at base, and in a mound of stone to top for sec. cor. of secs. 32 and 33, with brass cap mkd.



No suitable bearing trees available.

Desc. gradual N. slope.

- 40.90 Wash, 50 lks. wide, course W. Continue descent of 10 ft. over N. slope.
- 51.90 Wash, 30 lks. wide, course N.80°W., Asc. gradual SW. slope.
- 54.70 Spur, slopes W. Desc. 39 ft. over N. slope.
- 58.80 Wash, 15 lks. wide, course N.80°W. Asc. gradual SW. slope.
- 68.20 Spur, slopes W. Desc. gradual NW. slope.
- 70.90 Wash, 20 lks. wide, course W. Asc. 61 ft. over S. slope.
- 74.10 Rock spur, slopes W. Desc. 20 ft. over gradual N. slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, with telephone insulation glass deposited at base, and in a mound of stone to top for cor. of secs. 28, 29, 32, and 33, with brass cap mkd.



1934

No suitable bearing trees available.

Land, mountainous.
 Soil, rocky 4th. rate.
 Timber, pinion, and juniper.
 Undergrowth, oakbrush and cacti.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains	
	East, on a random line, bet. secs. 28 and 33.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.02	Intersect N. and S. line, 12 lks. N. of the cor. of secs. 27, 28, 33, and 34. 27, 28, 32, and 33. Thence,
	N.89°55'W., on true line, bet. secs. 28 and 33.
	Over mountainous land, through scattering timber and dense undergrowth.
	Desc. 223 ft. over W. slope.
11.60	Wash, 150 lks. wide, course N. Asc. 91 ft. over NE. slope.
18.87	Intersect the NE. side line (3-4) of "Argent" unpatented lode mining claim, Min. Sur. No. 3275A at 7.52 chs. N.28°10'W. of Cor. No. 3 thereof. Thence across Min. Sur. No. 3275A.
19.00	Spur, slopes N. Continue ascent of 139 ft. over NE. slope.
39.51	Intersect the SW. side line, (4-1) of "Admiral" unpatented lode mining claim, Min. Sur. No. 3275A at 6.95 chs. S.28°10'E. of Cor. No. 1 thereof. Leave unpatented mineral land.
36.00	Desc. 46 ft. over SW. slope.
40.01	Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 6x6x3 ins. mkd. X deposited at base, and in a mound of stone to top for $\frac{1}{4}$ sec. cor. of secs. 28 and 33, with brass cap mkd.
	S28 S33 1934
	Desc. 125 ft. over SW. slope.
45.90	Wash, 15 lks. wide, course NW. Asc. 17 ft. over NE. slope.
49.50	Spur, slopes NW. Desc. 196 ft. over NW. slope.
58.10	Wash, 10 lks. wide, course NW. Asc. 11 ft. over NE. slope.
60.80	Spur, slopes NW. Desc. 68 ft. over SW. slope.
67.00	Wash, 10 lks. wide, course SW. Asc. 9 ft. over NE. slope.
68.80	Spur, slopes SW. Desc. 40 ft. over SW. slope.
74.25	Wash, 10 lks. wide, course NW. Asc. 19 ft. over NE. slope.
79.25	Spur, slopes NW. Desc. 17 ft. over W. slope.
80.02	The cor. of secs. 28, 29, 32, and 33. Land, mountainous. Soil, rocky 4th. rate. Timber, pinion, juniper, and oak. Undergrowth, oakbrush, manzanita, and cacti.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains

N.0°02'W., on true line, bet. secs. 28 and 29.

Over mountainous land, through scattering timber and dense undergrowth.

Over rolling N. slope.

6.40 Telephone line, bears N.30°E. and S.30°W.

14.60 Power line, bears N.30°E. and S.30°W.


17.00 Wash, 10 lks. wide, course NW. Asc. 31 ft. over S. slope.

21.90 Spur, slopes NW. Desc. 23 ft. over N. slope.

29.20 Highway, bears NE. and SW.

35.80 Wash, 15 lks. wide, course W. Asc. gradual S. slope.

40.00 Set an iron post 3 ft. long, 1 in. in diam., on bedrock, with a stone 5x5x2 ins. mkd, X deposited at base, and in a mound of stone to top for 1/4 sec. cor. of secs. 28 and 29, with brass cap marked

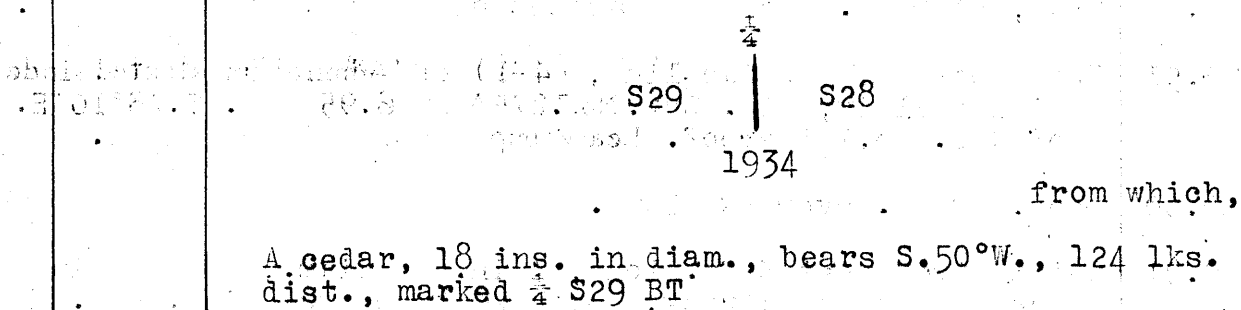

Desc. gradually over rolling N. slope.

42.10 Wash, 20 lks. wide, course SW.


49.10 Intersect SW end line (13-4) of the "Derby" pat. lode mining claim, Min. Sur. No. 3425, at 64 lks. S.36°18'E. of Cor. No. 3 thereof. Across patented mineral land.

53.60 Wash, 20 lks. wide, course SW. Asc. 181 ft. over SW. slope.

73.90 Spur, slopes W. Desc. gradual NW. slope.

75.45 Wash, near head, course SW. Asc. 123 ft. over SE. slope.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 15 ins. in the ground to bedrock, with a stone marked with X, deposited at base, and in a mound of stone to top for cor. of secs. 20, 21, 28, and 29, with brass cap mkd.



1934

from which,

A cedar, 14 ins. in diam., bears N.53 1/2°W., 95 lks. dist., marked T13NR3WS20BT

A cedar, 8 ins. in diam., bears S.69 1/2°E., 182 lks. dist., marked T13NR3WS28BT

Resurvey and Survey of Subdivision Lines of T. 13 N., R. 3 W. BOOK 4080

Chains

A cedar, 12 ins. in diam., bears S. $66\frac{1}{2}^{\circ}$ W., 142 lks. dist. marked T13N R3W S29 BT.

Land, mountainous.
Soil, rocky 4th. rate.
Timber, cedar, oak and juniper.
Undergrowth, oakbrush, mahogany and cacti.

S. $89^{\circ}55'E.$, on a random line, bet. secs. 21 and 28:

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.00 Intersect N. and S. line at 2 lks. S. of cor. of secs. 21, 22, 27 and 28.

Thence

N. $89^{\circ}56'W.$, on true line bet. secs. 21 and 28.

Over mountainous land, through scattering timber and dense undergrowth.

Desc. 403 ft. over NW. slope.

4.57 Intersect the NE. side line (4-1) of the "FAIR VIEW" pat. lode mining claim, Min. Sur. No. 3425, at 10.05 chs. N. $67^{\circ}34'W.$, of cor. No. 1 thereof. Across patented mineral land.

20.10 Wash, 10 lks. wide, course N. $70^{\circ}W.$

26.04 Intersect the SW. side line (2-3) of the "GRAND VIEW" patented lode claim, Mineral Survey No. 3425, at a point 2.46 chs. N. $73^{\circ}00'W.$, of its cor. No. 2. Leave patented mineral land.

32.15 Wash, 10 lks. wide, course SW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for the $\frac{1}{4}$ sec. cor., with brass cap marked

S 21
 $\frac{1}{4}$ —————
S 28

1934

No suitable bearing trees available; raise a mound of stone 4 ft. base, 2 ft. high, N. of cor.

41.10 Intersect the NE. side line (1-4) of the "ALBE MARLE" patented lode claim, Mineral Survey No. 3425, at a point 68 lks. N. $36^{\circ}18'W.$, of its cor. No. 1. Enter patented mineral land.

48.60 Road, bears NE. and SW. Foot of hill, bears NW. and SE.; asc. 165 ft. over NE. slope.

72.60 Slope changes to N.; asc. 104 ft. over N. slope.

80.00 The cor. of secs. 20, 21, 28 and 29.

Land, mountainous.
Soil, rocky 4th. rate.
Timber, oak, juniper and pinion.
Undergrowth, oakbrush, manzanita and cacti..

Resurvey and Survey of Subdivision Lines of T. 13 N., R. 3 W.

Chains	
	N.0°02'W.; on true line, bet. secs. 20 and 21.
	Over mountainous land, through thinly scattering timber and dense undergrowth.
	Across patented mineral land.
	Desc. 255 ft. over NW. slope.
14.55	Wash, 50 lks. wide, course W. Over rolling W. slope.
21.30	Wash, 30 lks. wide, course W.
22.05	Skull Valley-Prescott road, bears E. and W.
25.45	Road, bears NE. and SW.
28.65	Wash, 60 lks. wide, course SW. (Copper Creek) Asc. 203 ft. over SE. slope.
38.65	Knoll on spur from N.; desc. 30 ft. over N. slope.
40.00	Set an iron post, 3 ft. long 1 in. diam., 16 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	from which
	A pine, 7 ins. diam., bears S.14°E., 38 lks. dist., mkd. $\frac{1}{4}$ S21 BT.
	A pine, 5 ins. diam., bears S.41 $\frac{1}{2}$ °W., 17 lks. dist., mkd. $\frac{1}{4}$ S20 BT.
	Asc. gradual S. slope.
43.50	Spring of water, on line.
44.00	Top of knoll; on spur from NE.; desc. 37 ft. over NW. slope.
55.60	Old road, bears NE. and SW.
58.70	Swale, drains SW.; asc. 70 ft. over SE. slope.
63.15	Spur, slopes E.; desc. 80 ft. over NE. slope.
64.87	Intersect the N. side line (5-6) of the "RED BIRD" pat. lode mining claim, Mineral Survey No. 510, at 3.30 chs. N.82°20'W., of cor. No. 6 thereof. Leave patented mineral land.
69.45	Shallow draw, course E.; asc. 89 ft. over SE. slope.
79.40	Spur, slopes E.; desc. gradual NE. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 16, 17, 20 and 21, with brass cap marked

Resurvey and Survey of Subdivision Lines of T. 13 N., R. 3 W.

Chains

T13N R3W	S17	S16
S20	S21	
1934		

from which

A pinion, 8 ins. diam., bears N. $16\frac{1}{4}^{\circ}$ W., 29 lks. dist., marked T13N R3W S17 BT.

No other suitable bearing trees available; raise a mound of stone 4 ft. base, 2 ft. high, W. of cor.

Land, mountainous.

Soil, rocky 4th rate.

Timber, oak, pinion and juniper.

Undergrowth, oakbrush, manzanita and cacti.

S. $89^{\circ} 56'$ E., on a random line, bet. secs. 16 and 21.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.98 Intersect N. and S. line at 9 lks. S. of cor. of 15, 16, 21 and 22.

Thence

West, on true line, bet. secs. 16 and 21.

Over mountainous land, through scattering timber and dense undergrowth.

Asc. 21 ft. over N. slope.

8.00 Spur, slopes W., from SE.; desc. 128 ft. over W. slope.

14.70 Spur, slopes SW. from E. Continue desc.

39.99 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S16	
	S21	
1934		

from which

A black oak, 10 ins. diam., bears N. $64\frac{1}{2}^{\circ}$ W., 33 lks. dist., marked $\frac{1}{4}$ S16 BT.

A black oak, 10 ins. diam., bears S. $23\frac{1}{4}^{\circ}$ E., 40 lks. dist., marked $\frac{1}{4}$ S21 BT

Continue desc. over gradual W. slope.

40.90 Wash, 15 lks. wide, course SW.; asc. 14 ft. over SE slope.

45.57 Road, bears NE. and SW.

46.33 Intersect the SE. end line (3-4 line) of the "BRONZE STATUE" patented lode claim, Mineral Survey No. 513, at a point 3.57 chs. S. $32^{\circ} 30'$ W., of its cor. No. 3. Enter patented mineral land.

57.18 Intersect the NW. end line (4-5 line) of the "HEAD CENTER" patented lode claim, Mineral Survey No. 514, at a point

Resurvey and Survey of Subdivision Lines of T. 13 N., R. 3 W.

Chains	1.84 chs. N. 46° 00' E., of its cor. No. 5. Leave patented mineral land.
58.90	Wash, 40 lks. wide, course SW.; asc. 14 ft. over SE. slope.
67.30	Road, bears NE. and SW.
70.30	Wash, 25 lks. wide, course NE.; asc. 158 ft. over E. slope.
79.98	The cor. of secs. 16, 17, 20 and 21. Land, mountainous. Soil, rocky 4th rate. Timber, oak. Undergrowth, oakbrush, manzanita and cacti.
	N. 0° 02' W., on true line, bet. secs. 16 and 17. Over mountainous land, through scattering timber and dense undergrowth.
5.65	Wash, 10 lks. wide, course E. Thence along rolling E. slope.
10.19	Wash, 10 lks. wide, course E.; asc. 14 ft. over S. slope.
13.95	Spur, slopes SE. Trail, on spur, bears NW. and SE.; desc. 13 ft. over N. slope.
14.88	Intersect the SW. side line (5-6 line) of the "SNOWBIRD" patented lode claim, Mineral Survey No. 490, at a point 9.08 chs. S. 57° 30' E., of its cor. No. 5. Enter patented mineral land.
15.40	Wash, 10 lks. wide, course SE.; asc. 30 ft. over SE. slope.
17.50	Spur, slopes SE.; desc. 34 ft. over NE. slope.
22.85	Wash, 25 lks. wide, course SE.; asc. 89 ft. over SW. slope.
25.66	Intersect the NE. side line (2-3 line) of the "SNOWBIRD" patented lode claim, Mineral Survey No. 490, at a point 3.30 chs. S. 57° 30' E. of its cor. No. 3. Leave patented mineral land.
25.90	Slope changes to W.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, with a stone 6x6x2 ins., marked X deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor.; with brass cap marked

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains

No suitable bearing trees available.

Desc. 42 ft. over W. slope.


52.70 Wash, 20 lks. wide, course SW. Asc. 45 ft. over E. slope.

62.40 Wash, 20 lks. wide, 15 ft. deep, course E. Asc. 33 ft. over SE. slope.

67.00 Desc. 21 ft. over N. slope.

69.15 Wash, 10 lks. wide, course SE. Asc. 291 ft. over S. slope.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 30 ins. in the ground for cor. of secs. 8, 9, 16, and 17, with brass cap mkd.



1934

No suitable bearing trees available.

Land, mountainous.
Soil, rocky 4th. rate.
Timber, oak, and pinion.
Undergrowth, oakbrush, and manzanita.

East, on a random line, bet. secs. 9 and 16.

40.00 Set temp. 1/4 sec. cor.

79.82 Intersect N. and S. line at 3 lks. N. of cor. of secs, 9, 10, 15, and 16.

Thence,

N.89°59'W., on true line, bet. secs. 9 and 16.


Over mountainous land, through scattering timber and dense undergrowth.

Asc. gradual NE. slope.

2.90 Spur, slopes SW. Desc. 360 ft. over NW. slope.

32.00 Wash, 20 lks. wide, course ^{SW} Asc. gradual SE. slope.

39.91 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, and in a mound of stone to top for 1/4 sec. cor., with brass cap mkd.



1934

from which,

An oak, 8 ins. in diam., bears N.35°15'E., 59 lks. dist., marked 1/4 S9 BT

An oak, 5 ins. in diam., bears S.21°W., 40 lks. dist., marked 1/4 S16 BT

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains

	Desc. 40 ft. over W. slope.
45.40	Wash, 40 lks. wide, course S. Asc. 289 ft. over E. slope.
62.30	Ridge, bears N. and S. Desc. 164 ft. over W. slope.
68.80	Wash, 10 lks. wide, course S. Asc. 203 ft. over E. slope.
79.82	The cor. of secs. 8, 9, 16, and 17.
	Land, mountainous. Soil, rocky 4th. rate. Timber, oak, and pinion. Undergrowth, oakbrush, manzanita, and mahogany.
	N; 0°02'W., on true line, bet. secs. 8 and 9. Over mountainous land, through thinly scattered timber and dense undergrowth. Asc. 74 ft. over S. slope.
2.30	Spur, slopes SE. Desc. 47 ft. over NE. slope.
22.50	Wash, 10 lks. wide, course SE. Asc. 90 ft. over S. slope.
28.50	Spur, slopes SE. Asc. gradual E. slope.
32.35	Wash, 15 lks. wide, course SE. Asc. 75 ft. over S. slope.
36.35	Ridge, bears SE. Thence along level E. slope.
39.45	Desc. 10 ft. over NE. slope.
40.00	Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 7x7x3 ins. mkd. X deposited at base, and in a mound of stone to top for $\frac{1}{4}$ sec. cor., with brass cap marked
	Desc. 63 ft. over NE. slope.
52.15	Wash, 20 lks. wide, course SE. Asc. 89 ft. over S. slope.
56.40	Slope changes to E. Asc. 46 ft. over same.
58.90	Desc. 67 ft. over NE. slope.
62.40	Wash, 12 lks. wide, course SE. Asc. 204 ft. over SE. slope.
69.40	Asc. 44 ft. over E. slope.
74.80	Desc. 42 ft. over NE. slope.
79.40	Wash, 10 lks. wide, course SE. Asc. 22 ft. over S. slope.
80.00	Set an iron post 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, with a stone 6x6x2 ins. mkd. X deposited at base, and in a mound of stone to top for cor. of secs. 4, 5, 8, and 9, with brass cap marked

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains

T13NR3W	
S5	S4
S8	S9

1934

from which,

A juniper, 12 ins. in diam., bears S.12°E., 83 lks. dist., marked T13NR3WS9BT

A juniper, 10 ins. in diam., bears S.70½°W., 76 lks. dist., marked T13NR3WS8BT

No other bearing trees available.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, oak, and juniper.

Undergrowth, oakbrush, manzanita, and mahogany.

S.89°59'E., on a random line, bet. secs. 4 and 9.

40.00 Set temp. ¼ sec. cor.

80.12 Intersect the N. and S. line at 2 lks. S. of the cor. of secs. 3, 4, 9, and 10.

Thence,

West, on true line, bet. secs. 4 and 9.

Over mountainous land, through dense timber and dense undergrowth.

Asc. 194 ft. over NE. slope.

6.30 Trail, bears NE. and SW.

15.86 Trail, bears NW. and SE.

16.70 Ridge, bears N. and S. Desc. 105 ft. over W. slope.

21.45 Head of wash, course SW. Asc. 24 ft. over SE. slope.

24.70 Short spur, slopes S. Desc. 35 ft. over SW. slope.

27.45 Wash, 10 lks. wide, course S. Asc. 168 ft. over SE. slope.

36.80 Spur, slopes S. Desc. 39 ft. over SW. slope.

40.06 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 4x4x2 ins. mkd. X deposited at base, and in a mound of stone to top for ¼ sec. cor. of secs. 4 and 9, with brass cap marked

S 4
S 9

1934

No suitable bearing trees available.

Desc. 216 ft. over SW. slope.

47.45 Wash, 10 lks. wide, course SW. Asc. 75 ft. over SE. slope.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.


Chains	
51.20	Spur, slopes S. Desc. 267 ft. over SW. slope.
65.40	Wash, 20 lks. wide, course SE. Asc. 191 ft. over E. slope.
80.12	The cor. of secs. 4, 5, 8, and 9.
	Land, mountainous. Soil, rocky 4th. rate. Timber, yellow pine, oak, pinion, and juniper. Undergrowth, oakbrush, manzanita, and cacti.
	N.0°02'W., on true line, bet. secs. 4 and 5.
	Over mountainous land, through dense timber and undergrowth.
	Asc. 17 ft. over S. slope.
0.90	Spur, slopes E. Desc. 9 ft. over NE. slope.
2.90	Wash, 10 lks. wide, course E. Asc. 164 ft. over SE. slope.
7.90	Desc. gradual N. slope.
11.00	Desc. 60 ft. over NE. slope.
15.40	Wash, 10 lks. wide, course SE. Asc. 415 ft. over broken S. slope.
29.00	Ridge, bears NW. and SE. Trail at this point bears NW.-SE. Desc. 13 ft. over E. slope.
31.30	Asc. 118 ft. over S. slope.
38.00	Ridge, bears NE. and SW. Desc. 18 ft. over NW. slope.
40.00	Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap marked.
	<div style="text-align: center;"> S5 S4 1934 </div>
	from which,
	A yellow pine, 8 ins. in diam., bears S. $31\frac{1}{2}^{\circ}$ E., 3 lks. dist., marked $\frac{1}{4}$ S4 BT
	A yellow pine, 12 ins. in diam., bears S. $5\frac{1}{2}^{\circ}$ W., 402 lks. dist., marked $\frac{1}{4}$ S5 BT
	Desc. 82 ft. over N. slope.
42.50	Trail, bears NE. and SW.
43.90	Wash, 5 lks. wide, course NE. Across level E. slope.
47.20	Desc. 180 ft. over NE. slope.
54.80	Wash, 5 lks. wide, course NW. Desc. 14 ft. along toe of spur.
55.90	Same wash, course NE. Desc. 45 ft. over NE. slope.
60.40	Wash, 20 lks. wide, course NE. Asc. 132 ft. over SE. slope.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains

- 66.85 Trail, bears NE. and SW.
- 72.50 Spur, slopes NE. and E. Desc. 30 ft. over NE. slope.
- 74.53 Desc. 193 ft. over N. slope.
- 78.65 Intersect the S. bdy. of sec. 33, T.14 N., R.3 W., at 10.28 chs. N.89°58'E. of cor. of secs. 32 and 33, which is an iron post 2 ins. in diam., marked and witnessed as described in the official record.

At point of intersection, set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in the ground for closing cor. of secs. 4 and 5, with brass cap marked



from which,

A spruce, 36 ins. in diam., bears S.85°E., 44 lks. dist., marked T13NR3WS4UCBT

A spruce, 6 ins. in diam., bears S.3°00'W., 48 lks. dist., marked T13NR3WS5CCBT

Land, mountainous.
Soil, rocky 4th. rate.
Timber, yellow pine, spruce, oak, and juniper.
Undergrowth, oakbrush, manzanita, and mahogany.

The cor. of secs. 31 and 32, on S. bdy. of Tp., is an iron post 2 ins. in diam., marked and witnessed as described in the official record.

From this cor., U.S.L.M. No. 3770 bears N.50°18'W.


Thence,

N.0°02'W., on true line, bet. secs. 31 and 32.

Over mountainous land, through thinly scattered timber and dense undergrowth.

Asc. 11 ft. over S. slope.

- 10.00 Wash, 20 lks. wide, course SE. Asc. 279 ft. over S. slope
- 18.00 Bend in same wash, course SW.
- 36.80 Spur, slopes E. Desc. 76 ft. over N. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 6x6x4 ins. mkd. X deposited at base, and in a mound of stone to top for 1/4 sec. cor., with brass cap marked



Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains

No suitable bearing trees available.

Continue descent of 46 ft. over N. slope.

42.80 Wash, 15 lks. wide, course E.

45.85 Wash, 10 lks. wide, course SE. Asc. 46 ft. over SW. slope.

50.00 End of spur, slopes W. Desc. 29 ft. over NW. slope.

51.20 Wash, 20 lks. wide, course SW. Asc. 87 ft. over SE. slope.

63.50 Spur, slopes W. Desc. 19 ft. over NW. slope.

65.30 Wash, 10 lks. wide, course SW. Asc. 29 ft. over SE. slope.

70.00 Spur, slopes SW. Desc. 55 ft. over NW. slope.

75.40 Head of wash, course SW. Asc. 111 ft. over SE. slope.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, with a stone 5x5x2 ins. mkd. X deposited at base, and in a mound of stone to top for cor. of secs. 29, 30, 31, and 32, with brass cap mkd.

T13NR3W	
S30	S29
S31	S32

1934

from which,

U.S.L.M. No. 3770 bears S. 48° 51' W.

No suitable bearing trees available.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, oak.

Undergrowth, oakbrush, manzanita, and cacti.

East, on a random line, bet. secs. 29 and 32.

40.00 Set temp. 1/4 sec. cor.

79.84 Intersect N. and S. line, at 5 lks. N. of the cor. of secs. 28, 29, 32, and 33.

Thence,

N. 89° 58' W., on true line, bet. secs. 29 and 32.

Over mountainous land, through thinly scattered timber and undergrowth.

Desc. 41 ft. over W. slope.

3.74 Telephone line, bears N. 30° E. and S. 30° W.

3.90 Wash, 5 lks. wide, course S.

8.90 Power line, bears NE. and SW.

9.00 Wash, 5 lks. wide, course S. Asc. 42 ft. over E. slope.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains	
16.80	Rocky spur, bears S.; road, on same bears S. Desc. 104 ft. over W. slope.
32.10	Enter Copper Basin wash, course S. Across same.
34.30	Leave Copper Basin wash, course S. Asc. 35 ft. over E. slope.
38.80	Spur, slopes SE. Desc. gradual W. slope.
39.92	Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 7x7x2 ins. mkd. X deposited at base, and in a mound of stone to top for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ $\frac{S\ 29}{S\ 32}$
	1934
	No suitable bearing trees available.
	Desc. 13 ft. over W. slope.
40.60	Wash, 5 lks. wide, course SE. Asc. 425 ft. over NE. slope.
70.80	Spur, slopes SE. Desc. 71 ft. over SW. slope.
79.84	The cor. of secs. 29, 30, 31, and 32. Land, mountainous. Soil, rocky 4th. rate. Timber, pinion, and oak. Undergrowth, oakbrush, manzanita, and mahogany.
	West, on a random line, bet. secs. 30 and 31.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.94	Intersect the W. bdy. of Tp., at 9 lks. S. of the cor. of secs. 30 and 31, hereinbefore described. Thence, S. 89° 56' E., on true line, bet. secs. 30 and 31. Over mountainous land, through thinly scattered timber and dense undergrowth. Asc. 68 ft. over W. slope.
9.05	Spur, slopes S. Desc. 39 ft. over E. slope.
16.95	Wash, 30 lks. wide, course S. Asc. 36 ft. over NW. slope.
20.34	Spur, slopes SW. Desc. 12 ft. over SE. slope.
25.15	Wash, 20 lks. wide, course SW. Asc. 180 ft. over SW. slope.
40.94	Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 8x8x2 ins. mkd. X deposited at base, and in a mound of stone to top for $\frac{1}{4}$ sec. cor., with brass cap marked

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains

$$\frac{1}{4} \frac{S30}{S31}$$

1934

No bearing trees available.

- 43.64 Spur, slopes NE. Desc. 35 ft. over SE. slope.
- 52.74 Bend in trail, bears NW. and SW.
- 55.34 Wash, 10 lks. wide, course S. Asc. 31 ft. over NW. slope.
- 56.34 Spur, slopes SW. Desc. 45 ft. over SE. slope.
- 66.94 Spur, slopes SW. Desc. gradual SE. slope.
- 68.84 Wash, 10 lks. wide, course SW. Asc. 165 ft. over NW. slope.
- 77.34 Spur, slopes SW. Asc. rolling W. slope.
- 80.94 The cor. of secs. 29, 30, 31, and 32.

Land, mountainous.
Soil, rocky 4th. rate.
Timber, oak, and pinion.
Undergrowth, oakbrush, manzanita, and mahogany.

N.0°02'W., on true line, bet. secs. 29 and 30.

Over mountainous land, through scattering timber and undergrowth.

Asc. 179 ft. over steep S. slope.

- 10.00 Spur, slopes W. Desc. 28 ft. over N. slope.
- 14.00 Head of wash, course W. Asc. 19 ft. over S. slope.
- 16.80 Spur, slopes W. Desc. 106 ft. over N. slope.
- 22.80 Head of wash, course W. Asc. 101 ft. over SW. slope.
- 31.10 Ridge, bears NW. and SE. Desc. 115 ft. over NE. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock, with a stone 7x7x3 ins. mkd. X deposited at base, and in a mound of stone to top for $\frac{1}{4}$ sec. cor., with brass cap marked

$$S30 \quad \frac{1}{4} \quad S29$$

1934

from which,

A pinion, 18 ins. in diam., bears S.20 $\frac{1}{2}$ °W., 59 lks. dist., marked $\frac{1}{4}$ S30 BT

No other bearing tree available.

Desc. 111 ft. over NW. slope.

Soil, rocky 4th. rate.

- 50.70 Wash, 10 lks. wide, course E. Asc. 11 ft. over S. slope.
- 54.00 Spur, slopes E. Thence along rolling E. slope.

Resurvey and Survey of Subdivision Lines of T. 13 N., R. 3 W.

Chains							
69.20	Wash, 5 lks. wide, course E. Asc. 45 ft. over S. slope.						
73.20	Spur, slopes E. Thence along rolling E. slope.						
79.00	Low saddle, bears E. and W.						
80.00	Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, with a stone mkd. X deposited at base, and in a mound of stone to top, for cor. of secs. 19, 20, 29, and 30, with brass cap marked						
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td colspan="2">T13NR3W</td> </tr> <tr> <td>S19</td> <td>S20</td> </tr> <tr> <td>S30</td> <td>S29</td> </tr> </table>	T13NR3W		S19	S20	S30	S29
T13NR3W							
S19	S20						
S30	S29						
	1934						
	from which,						
	A pinion, 8 ins. in diam., bears N. $56\frac{1}{2}^{\circ}$ E., 126 lks. distant, marked T13NR3WS20BT						
	No other bearing trees available.						
	Land, mountainous. Soil, rocky 4th. rate. Timber, oak, juniper, and pinion. Undergrowth, oakbrush, manzanita, laurel, locust, and cacti.						
40.00	S. $89^{\circ}58'$ E., on a random line, bet. secs. 20 and 29. Set temp. $\frac{1}{2}$ sec. cor.						
79.90	Intersect N. and S. line at 14 lks. S. of cor. of secs. 20, 21, 28, and 29. Thence,						
	S. $89^{\circ}56'$ W., on true line, bet. secs. 20 and 29. Over rolling, mountainous land, through scattering timber and dense undergrowth. Across patented mineral land.						
0.10	Spur, slopes NE. Desc. 311 ft. over NW slope.						
13.50	Wash, 50 lks. wide, course S. (Copper Basin wash). Asc. 84 ft. over E. slope.						
15.94	Intersect the W. side line (2-3) of the "Chicago" patented lode mining claim, Min. Sur. No. 485, at 10.00 chs. N. $7^{\circ}36'$ W., of Cor. No. 3 thereof. Leave patented mineral land.						
17.90	Old road, bears N. and S.						
22.40	Spur, slopes SE. Desc. 19 ft. over SW slope.						
33.40	Wash, 20 lks. wide, course SE. Asc. 31 ft. over E. slope.						
39.95	Set an iron post 3 ft. long, 1 in. in diam., 15 ins. in the ground to bedrock, and in a mound of stone to top for $\frac{1}{2}$ sec. cor., with brass cap marked						

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains

S20

S29

1934

from which,

An oak, 10 ins. in diam., bears N. $63\frac{1}{2}^{\circ}$ E., 60 lks. dist., marked $\frac{1}{4}$ S20 BT

A pinion, 8 ins. in diam., bears S. $58\frac{1}{2}^{\circ}$ W., 165 lks. dist., marked $\frac{1}{4}$ S29 BT

Asc. 63 ft. over E. slope.

45.00

Spur, slopes N. Desc. 39 ft. over SW. slope.

49.30

Wash, 20 lks. wide, course SE. Over rolling S. slope.

56.10

Wash, 20 lks. wide, course SE. Asc. 173 ft. over NE. slope.

68.84

Rocky spur, slopes N. Desc. 18 ft. over W. slope.

77.20

Head of wash, course NE. Asc. 13 ft. over E. slope.

79.90

The cor. of secs. 19, 20, 29, and 30.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, oak, pinion, and juniper.

Undergrowth, oakbrush, manzanita, and cacti.

N. $89^{\circ}56'$ W., on a random line, bet. secs. 19 and 30..

40.00

Set temp. $\frac{1}{4}$ sec. cor.

80.92

Intersect W. bdy. of Tp., at 19 lks. N. of cor. of secs. 19 and 30, hereinbefore described.

Thence,

N. $89^{\circ}56'$ E., on true line, bet. secs. 19 and 30.

Over mountainous land, through thinly scattered timber and dense undergrowth.

Asc. 27 ft. over SW. slope.

3.70

Ridge, bears NW and SE. Desc. 180 ft. over E. slope.

9.10

Trail, bears NE. and SW.

13.25

Road, bears NW. and SE.

17.80

Wash, 20 lks. wide, course N. Asc. 59 ft. over SW. slope.

21.60

Spur, slopes NW. Desc. 80 ft. over NW. slope.

31.90

Wash, 20 lks. wide, course NW. Asc. 50 ft. over SW. slope.

39:80

Old road, bears N. and S. (30 lks. N. to improved road, which bears E. and W.)

40.92

Set an iron post 3 ft. long, 1 in. in diam., 15 ins. in the ground to bedrock, with a stone 6x6x3 ins. mkd. X deposited at base, and in a mound of stone to top for

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains	
	<p>¼ sec. cor., with brass cap marked</p> <p style="text-align: center;">¼ $\frac{S\ 19}{S\ 30}$</p> <p style="text-align: center;">1934</p> <p>No suitable bearing trees available.</p> <p>Asc. 34 ft. over SW slope.</p>
48.90	Wash, 10 lks. wide, course SW. Asc. 48 ft. over SW slope.
52.90	Spur, slopes NW. Desc. 13 ft. over NE slope.
55.80	Wash, 20 lks. wide, course NW. Asc. 217 ft. over SW slope.
72.20	Spur, slopes NW. Desc. 109 ft. over E. slope.
80.92	The cor. of secs. 19, 20, 29, and 30.
	<p>Land, mountainous.</p> <p>Soil, rocky 4th. rate.</p> <p>Timber, juniper, oak, and pinion.</p> <p>Undergrowth, oakbrush, manzanita, locust, and cacti.</p>
	<p>N.0°02'W., on true line, bet. secs. 19 and 20.</p> <p>Over mountainous land, through thinly scattered timber and dense undergrowth.</p> <p style="text-align: center;">E</p> <p>Desc. 15 ft. over NW slope.</p>
10.80	Wash, 10 lks. wide, course SE. Asc. 271 ft. over SW slope.
13.84	Road, bears NW. and SE.
17.00	Wash, 20 lks. wide, course SE. Asc. 232 ft. over SW slope.
29.80	Spur, slopes SE. Thence along level E. slope.
40.00	Set an iron post 3 ft. long, 1 in. in diam., 22 ins. in the ground to bedrock, with a stone mkd. X deposited at base, and in a mound of stone to top for ¼ sec. cor., with brass cap marked
	<p>¼</p> <p>S19 S20</p> <p>1934</p>
	<p style="text-align: right;">from which,</p> <p>A juniper, 20 ins. in diam., bears N.39½°E., 125 lks. dist., marked ¼ S20 BT.</p> <p>Desc. 244 ft. over NW slope.</p>
53.60	Wash, 10 lks. wide, course NE. Asc. gradual SE slope.
70.50	Spur, slopes W. Desc. 20 ft. over NW slope.
76.55	Wash, 25 lks. wide, course E. Skull Valley-Prescott road bears E. and W. Asc. 30 ft. over SW slope.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, with a beer bottle deposited at base, and in a mound of stone to top for cor. of secs. 17, 18, 19, and 20, with brass cap marked

T13NR3W
S18 S17
S19 S20

1934

from which,

An oak, 8 ins. in diam., bears N.62 $\frac{1}{2}$ °W., 85 lks. dist., marked T13NR3WS18BT

An oak, 12 ins. in diam., bears S.1°E., 137 lks. dist., marked T13NR3WS20BT

An oak, 15 ins. in diam., bears S.87 $\frac{1}{2}$ °W., 85 lks. dist., marked T13NR3WS19BT

No NE-bearing tree available.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, oak, pinion, and cedar.

Undergrowth, oakbrush, manzanita, and cacti.

N.89°56'E., on a random line, bet. secs. 17 and 20.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.92 Intersect N. and S. line at 5 lks. N. of cor. of secs. 16, 17, 20, and 21.

Thence,

S.89°58'W., on true line, bet. secs. 17 and 20.

Over mountainous land, through scattering timber and dense undergrowth.

Asc. 63 ft. over NE.slope.

4.80 Spur, slopes SW. Desc. 138 ft. over W. slope.

12.80 Wash, 20 lks. wide, course SW. Asc. 30 ft. over gradual SE.slope.

18.25 Wash, 10 lks. wide, course SE. Asc. gradual NE.slope.

19.90 Spur, slopes S.Desc. gradual SW.slope.

23.80 Wash, 10 lks. wide, course SE.

26.60 Wash, 10 lks. wide, course SE. Asc. gradual SE.slope.

32.10 Wash, 15 lks. wide, course SE. Asc. gradual SE.slope.

39.96 Set an iron post 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, with a stone 7x7x2 ins. mkd. X deposited at base, and in a mound of stone to top for $\frac{1}{4}$ sec. cor., with brass cap marked:

$\frac{1}{4}$ S 17
S 20

1934

Resurvey and Survey of Subdivision Lines of T. 13 N., R. 3 W.

Chains

No bearing trees available.

Ascend 131 ft. over SE. slope.

46.95 Spur, slopes S. Desc. 331 ft. over SW. slope.

55.80 Wash, 10 lks. wide, course SE. Asc. gradual NE. slope.

58.11 Old road, bears NW. and SE.

79.92 The cor. of secs. 17, 18, 19, and 20.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, oak, juniper, and pinion.

Undergrowth, oakbrush, manzanita, and cacti.

40.00 S. $89^{\circ}56'W.$, on a random line, bet. secs. 18 and 19.

Set temp. $\frac{1}{4}$ sec. cor.

80.81 Intersect the W. bdy. of Tp., at 12 lks. S. of cor. of secs. 18 and 19, hereinbefore described.

Thence,

S. $89^{\circ}59'E.$, on true line, bet. secs. 18 and 19.

Over mountainous land, through scattering timber and dense undergrowth.

Across patented mineral land.

Asc. 49 ft. over NW. slope.

3.90 Spur, slopes N. Desc. 40 ft. over NE. slope.

18.75 Wash, 30 lks. wide, course NW. Asc. 23 ft. over SW. slope.

20.75 Spur, slopes S. Desc. gradual SE. slope.

21.81 Intersect the E. end line (2-3) of the "Arizona" pat. lode mining claim, Min. Survey No. 3802, at 92 lks. N. $0^{\circ}17'E.$ of Cor. No. 3 thereof. Leave patented land.

34.11 Wash, 20 lks. wide, course SW. Asc. 57 ft. over NW. slope.

35.72 Spur, slopes SW. Desc. gradual SE. slope.

40.51 Same wash, 20 lks. wide, course NE.

Asc. gradual NW. slope.

40.81 Set an iron post $\frac{3}{4}$ ft. long, 1 in. in diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ $\frac{S18}{S19}$
1934

of stone 4 ft. base, 2 ft. high N. of cor. raise a mound

Asc. 131 ft. over NW. slope.


Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains	
45.20	Road to the Navy mine, bears NE. and SW.
52.90	Desc. 53 ft. over NE. slope.
53.38	Wash, 10 lks. wide, course NW. Asc. 92 ft. over SW. slope.
63.30	Spur, slopes NW. Desc. 58 ft. over NE. slope.
76.70	Road, from Skull Valley to Prescott, bears NW. and SE.
77.65	Wash, 10 lks. wide, course NW. Asc. 31 ft. over SW. slope.
80.81	The cor. of secs. 17, 18, 19, and 20.
	Land, mountainous. Soil, rocky 4th. rate. Timber, oak. Undergrowth, oakbrush, manzanita, and mahogany.
	N.0°02'W., on true line, bet. secs. 17 and 18. Over mountainous land, through scattering timber and dense undergrowth. Asc. 29 ft. over S. slope.
4.50	Spur, slopes SE. Desc. 41 ft. over N. slope.
8.70	Wash, 20 lks. wide, course W. Asc. 210 ft. over S. slope.
24.40	Shallow wash, 10 lks. wide, course SW. Asc. gradual SW. slope.
35.70	Spur, slopes W. Desc. 70 ft. over NW. slope.
40.00	Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 6x6x2 ins. mkd. X deposited at base, and in a mound of stone to top for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ S17 S18 1934 from which,
	A juniper, 30 ins. in diam., bears N.4°E., 207 lks. dist., marked $\frac{1}{4}$ S18 BT
	No other bearing trees available.
	Desc. 44 ft. over NW. slope.
40.60	Road, bears E. and W.
43.80	Wash, 10 lks. wide, course W. Asc. gradual SW. slope.
53.50	Desc. gradual NW. slope.
55.00	Bend in road, bears NW. and SW.
60.05	Wash, 15 lks. wide, course SW. Asc. 295 ft. over SE. slope.
67.20	Road, bears E. and W.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 26 ins. in the ground for cor. of secs. 7, 8, 17, and 18, with brass cap marked



1934

No suitable bearing trees available.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, oak and juniper.

Undergrowth, oakbrush, manzanita, buckbrush, and cacti.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.98 Intersect N. and S. line at 5 lks. N. of cor. of secs. 8, 9, 16, and 17.

Thence,

West, on true line, bet. secs. 8 and 17.

Over mountainous land, through thinly scattered timber and dense undergrowth.

Asc. gradual SE. slope.

5.10 Spur, slopes SW. Desc. 68 ft. over W. slope.

10.40 Wash, 10 lks. wide, course S. Asc. 164 ft. over E. slope.

16.00 Spur, slopes S. Desc. 159 ft. over SW. slope.

23.55 Wash, 10 lks. wide, course SW. Asc. gradual SE. slope.


26.05 Desc. 73 ft. over SW. slope.

31.90 Trail, bears NW. and SE.

33.20 Wash, 10 lks. wide, course SE. Asc. 71 ft. over E. slope.

36.90 Spur, slopes SW. Desc. 38 ft. over NW. slope.

39.99 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 7x7x4 ins. mkd. X deposited at base, and in a mound of stone to top for $\frac{1}{4}$ sec. cor., with brass cap marked



1934

No suitable bearing trees available.

Desc. 55 ft. over NW. slope.

42.90 Wash, 15 lks. wide, course SW. Asc. 28 ft. over SE. slope.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains	
43.53	Trail, bears NE. and SW.
48.70	Spur, slopes SW. Desc. 183 ft. over NW. slope.
51.20	Trail, bears NW. and SE.
72.65	Wash, 20 lks. wide, course SW. Asc. 235 ft. over E. slope.
79.98	The cor. of secs. 7, 8, 17, and 18.
	Land, mountainous. Soil, rocky 4th. rate. Timber, oak, and juniper. Undergrowth, oakbrush, manzanita, and buckbrush.
	N. 89° 59' W., on a random line, bet. secs. 7 and 18.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.81	Intersect the cor. of secs. 7 and 18, on W. bdy. of Tp., hereinbefore described.
	Thence,
	S. 89° 59' E., on true line, bet. secs. 7 and 18.
	Over mountainous land, through scattering timber and dense undergrowth.
	Desc. gradual SE. slope..
9.24	Intersect the NW. side line (2-3) of the "Bellmont" pat. lode mining claim, Min. Sur. No. 3802, at 3.63 chs. N. 78° 22' E. of Cor. No. 2 thereof. Across patented mineral land.
12.11	Wash, 10 lks. wide, course SW. Asc. 161 ft. over SW. slope.
27.70	Spur, slopes S. Desc. 24 ft. over E. slope.
28.60	Wash, 10 lks. wide, course S. Asc. 218 ft. over SW. slope.
27.42	Intersect the E. end line (3-4) of the "Bellmont" pat. lode mining claim, Min. Sur. No. 3802, at 3.90 chs. S. 6° 56' W. of Cor. No. 3 thereof. Leave patented mineral land.
37.56	Spur, slopes S. Desc. 24 ft. over SE. slope.
40.81	Set an iron post 3-ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 8x8x3 ins. mkd. X deposited at base, and in a mound of stone to top for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ $\frac{S 7}{S 18}$
	1934
	No suitable bearing trees available.
	Desc. 106 ft. over SE. slope.
47.00	Wash, 10 lks. wide, course SE. Asc. gradual SW. slope.
47.57	Spur, slopes S. Desc. gradual SE. slope.

Resurvey and Survey of Subdivision Lines of T. 13 N., R. 3 W.

Chains	
49.10	Wash, 20 lks. wide, course SW. Asc. 171 ft. over NW. slope.
54.80	Spur, slopes SW. Continue ascent of 271 ft. over SW. slope.
70.26	Spur, slopes SW. Continue ascent of 58 ft. over SW. slope.
76.15	Thence along level S. slope to
80.81	The cor. of secs. 7, 8, 17, and 18.
	Land, mountainous. Soil, rocky 4th. rate. Timber, oak. Undergrowth, oakbrush, manzanita, and buckbrush.
	N.0°02'W., on true line, bet. secs. 7 and 8. Over mountainous land, through scattering timber and dense undergrowth. Asc. 52 ft. over E. slope.
7.15	Desc. 6 ft. over E. slope.
11.27	Trail, bears NE. and SW. Asc. 413 ft. over SE. slope.
32.85	Spur, slopes SW. Asc. 69 ft. over W. slope.
37.21	Desc. 17 ft. over W. slope.
40.00	Set an iron post 3 ft. long, 1 in. in diam., 22 ins. in the ground to bedrock, with a stone 8x8x4 ins. mkd. X deposited at base, and in a mound of stone to top for $\frac{1}{4}$ sec. cor., with brass cap marked
	No suitable bearing trees available.
	Desc. 83 ft. over NW. slope.
47.60	Wash, 10 lks. wide, course SW. Asc. 116 ft. over SE. slope.
51.80	Ridge, bears NE. and SW. Trail on same bears NE. and SW. Desc. gradual NW. slope.
52.72	Cabin bears N.55 $\frac{1}{2}$ °E., about 5 chs. distant. A tunnel, bears N.50 $\frac{1}{2}$ °E., about 5 chs. distant. Desc. 75 ft. over NW. slope.
55.00	Wash, 10 lks. wide, course NW. Asc. gradual SW. slope.
57.60	Spur, slopes W. Desc. 210 ft. over NW. slope to
63.45	Wash, 5 lks. wide, course SW. Asc. 80 ft. over broken S. slope.
66.50	Spur, slopes SW. Continue asc. of 37 ft. over SW. slope to

Resurvey and Survey of Subdivision Lines of T. 13 N., R. 3 W.

Chains

76.95	Ridge, bears NW. and SE. Desc. 102 ft. over NE. slope.						
80.00	Set an iron post 3 ft. long, 2 ins. in diam., 30 ins. in the ground for cor. of secs. 5, 6, 7, and 8, with brass cap marked						
	<table style="margin: auto;"> <tr><td colspan="2">T13NR3W</td></tr> <tr><td>S6</td><td>S5</td></tr> <tr><td>S7</td><td>S8</td></tr> </table> <p>1934</p> <p>No bearing trees available.</p> <p>Land, mountainous. Soil, rocky 4th. rate. Timber, oak. Undergrowth, oakbrush, manzanita, and cacti.</p>	T13NR3W		S6	S5	S7	S8
T13NR3W							
S6	S5						
S7	S8						
40.00	East, on a random line, bet. secs. 5 and 8. Set temp. $\frac{1}{4}$ sec. cor.						
79.90	Intersect N. and S. line at 7 lks. S. of cor. of secs. 4, 5, 8, and 9. Thence, S. 89° 57' W., on true line, bet. secs. 5 and 8. Over mountainous land, through scattering timber and dense undergrowth. Asc. 321 ft. over E. slope.						
7.75	Foot of granite outcropping ledge, bears N. and S. Continue ascent of 66 ft. over vertical wall.						
8.11	Top of ledge, bears N. and S. Continue ascent of 98 ft. over E. slope.						
11.35	Ridge, bears N. and S. Desc. 509 ft. over W. slope to wash.						
23.64	Trail, bears NE. and SW.						
26.44	Wash, 15 lks. wide, course SW. Asc. 5 ft. over SE. slope.						
27.60	Spur, slopes S. Desc. 14 ft. over SW. slope.						
28.40	Wash, 10 lks. wide, course SE.						
35.55	Desc. 20 ft. over SW. slope.						
39.80	Wash, 10 lks. wide, course SE. Asc. 10 ft. over SE. slope.						
39.95	Set an iron post 3 ft. long, 1 in. in diam., 24 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap marked						
	<table style="margin: auto;"> <tr><td>$\frac{1}{4}$</td><td>S5</td></tr> <tr><td></td><td>S8</td></tr> </table> <p>1934</p> <p>No bearing trees available; raise a mound of stone 4 ft.</p>	$\frac{1}{4}$	S5		S8		
$\frac{1}{4}$	S5						
	S8						

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains	base, 2 ft. high N. of cor. Asc. 160 ft. over SE. slope.
47.90	Ridge, bears SW. Desc. 1230 ft. over NW. slope.
59.80	Wash, 20 lks. wide, course NW. Asc. 67 ft. over N. slope.
63.90	Spur, slopes N. Desc. gradual W. slope, 80 ft.
66.26	Wash, 10 lks. wide, course NW. Asc. gradual NE. slope.
71.75	Spur, slopes N. Desc. gradual W. slope.
75.80	Wash, 10 lks. wide, course NW. Asc. 55 ft. over NE. slope.
78.30	Spur, slopes N. Desc. gradual NW. slope.
79.90	The cor. of secs. 5, 6, 7, and 8. Land, mountainous. Soil, rocky 4th. rate. Timber, yellow pine, aspen, and juniper. Undergrowth, oakbrush, buckbrush, manzanita, and cacti.
	N. 89° 59' W., on a random line, bet. secs. 6 and 7.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.70	Intersect W. bdy. of Tp., at 7 lks. N. of cor. of secs. 6 and 7, hereinbefore described. Thence, N. 89° 58' E., on true line, bet. secs. 6 and 7. Over mountainous land, through scattering timber and dense undergrowth. Desc. 108 ft. over SE. slope.
5.00	Wash, 20 lks. wide, course SE. Asc. 115 ft. over NW. slope.
12.85	Spur, slopes SW. Desc. 58 ft. over SE. slope.
21.55	Swale, drains S. Asc. 12 ft. over NW. slope.
26.00	Spur, slopes S. Desc. 12 ft. over SE. slope.
27.25	Wash, 15 lks. wide, course SW. Asc. 245 ft. over NW. slope.
35.55	Spur, slopes SW. Desc. 45 ft. over SE. slope.
40.70	Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 8x8x5 ins. mkd. X deposited at base, and in a mound of stone to top for $\frac{1}{4}$ sec. cor., with brass cap marked $\frac{1}{4} \frac{56}{57}$ 1934 from which, A hoist tower, bears S. 29° 17' W., about 15 chs. dist., No bearing trees available. Asc. 212 ft. along S. slope.

Resurvey and Survey of Subdivision Lines of T.13 N., R.3 W.

Chains

- 53.30 Spur, ~~slopes~~ SW. Asc. 50 ft. over W. slope.
- 55.77 Spur, ~~slopes~~ SW. Asc. 128 ft. over S. slope.
- 70.25 Spur, ~~slopes~~ SW. Desc. gradual SE. slope.
- 72.85 Wash, 10 lks. wide, course SW. Asc. 97 ft. up same.
- 77.15 Leave wash at head; ascend 28 ft. over W. slope.
- 78.05 Spur, ~~slopes~~ NW. Desc. 31 ft. over NE. slope.
- 80.70 The cor. of secs. 5, 6, 7, and 8.
- Land, mountainous.
Soil, rocky 4th. rate.
Timber, oak, juniper, and yellow pine.
Undergrowth, oakbrush, manzanita, and cacti.
-
- N.0°02'W., on true line, bet. secs. 5 and 6.
- Over mountainous land, through scattering timber and undergrowth.
- Desc. 263 ft. over NE. slope.
- 11.60 Wash, 14 lks. wide, course N., drains from SE. Continue down same.
- 15.50 Wash, 10 lks. wide, course W., at junction with wash from East.
- Asc. 93 ft. over S. slope.
- 19.65 Spur, ~~slopes~~ W. Desc. 98 ft. over N. slope.
- 23.10 Wash, 26 lks. wide, course W. Asc. 218 ft. over S. slope.
- 30.85 Spur, ~~slopes~~ SW. Desc. 54 ft. over NW. slope.
- 36.60 Wash, 10 lks. wide, course SW. Asc. 96 ft. over S. slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 8x8x2 ins. mkd. X deposited at base, and in a mound of stone to top for $\frac{1}{4}$ sec. cor., with brass cap marked
-
- No suitable bearing trees available.
- Asc. 13 ft. over W. slope.
- 46.30 Ridge, bears NW. Desc. 184 ft. over NW. slope.
- 52.70 Head of small wash, course NW. Desc. 24 ft. over W. slope.
- 58.50 Wash, 10 lks. wide, course NW. Desc. 24 ft. over W. slope.
- 63.85 Wash, 20 lks. wide, course W. Asc. 49 ft. over SW. slope.

Resurvey and Survey of Subdivision Lines of T. 13 N., R. 3 W.

Chains

- 68.50 Spur, slopes W.; desc. 73 ft. over N. slope.
- 73.00 Wash, 10 lks. wide, course W.; asc. 140 ft. over S. slope.
- 78.55 Intersect the S. bdy. of sec. 32, T. 14 N., R. 3 W., at 10.20 chs. N.89°58'E., of cor. of secs. 31 and 32, which is an iron post, 2 ins. diam., firmly set, marked and witnessed as described in the official record.

At point of intersection, set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground for closing corner of secs. 5 and 6, with brass cap mkd.

T14N R3W

S32

S6	S5
T13N	R3W

C C

1934

No suitable bearing trees available; raise a mound of stone, 4 ft. base, 2 ft. high, S. of cor.

Land, mountainous.

Soil, rocky 4th. rate.

Timber, yellow pine, oak, juniper and pinion.

Undergrowth, oakbrush, manzanita and laurel.

RETRACEMENT OF PATENTED MINING CLAIMS IN T. 13 N., R. 3 W.

The following notes describe the retracement of such portions of the outboundaries of the contiguous group of patented mining claims lying in secs. 20, 21, 27, 28 and 29 as disagree with the official record. A complete retracement of the public land boundaries of the group was made, but such lines as were found to agree with the official record are not shown.

Beginning at cor. No. 3 of the "CARBUNCLE" claim, Sur. No. 488, locally perpetuated with a wooden post, unmarked, 4 ins. square, projecting 3 ft. above ground.

N.3°00'E., on W. side line of claim.

- 22.70 Intersect cor. No. 2 of the claim, identical with cor. No. 5 of "CROSS" claim, Sur. No. 487, which is a wooden post 4 ins. square, projecting 3 ft. above ground, mkd. C-2 on SE. face, and C-5 on NE. face.

Thence

N.15°30'E., on W. end line of "CROSS" claim, Sur. No. 487.

- 9.00 Intersect cor. No. 3 of "CROSS" claim, which is a wooden post, 4 ins. square, projecting 2 ft. above ground, mkd. C-3 on SE. face.

From cor. No. 3 of the "Quartz Hill" claim Sur. No. 491, which is a wooden post, 4 ins. square, projecting 3 ft. above ground, firmly set, mkd. QH-3 on N. face.

N.21°40'E., on W. side line of claim

- 17.20 Intersect cor. No. 2 of "Quartz Hill" claim, which is a

RETRACEMENT OF PATENTED MINING CLAIMS IN T. 13 N., R. 3 W.

Chains	
	wooden post, 4 ins. square, projecting 3 ft. above ground, mkd. QH-2 on S. face.
	Thence
	S.75°29'E., on N. end line "Quartz Hill" claim, Sur. No. 491.
3.34	Intersect the N.E.C. cor., which is a wooden post, 4 ins. square, projecting 2 ft. above ground, in mound of stone, mkd. NEC-No. 1 QH on S. face.
6.73	Intersect Cor. No. 6 of "Quartz Hill" claim, Sur. No. 491, identical with cor. No. 5 of the "Red Bird" claim, Sur. No. 510, which is a wooden post, 4 ins. square by 4 ft. above ground, mkd. QH No.6 on SW. face and RB No.5 on SE. face.
	From cor. No. 1 of the "BILLY" claim, Sur. No. 3460, which is a stone 12x8x6 ins. above ground, firmly set, mkd. X-1B-3460 on W. face,
	N.75°39'W., on N. end line of "BILLY" claim.
0.70	Intersect cor. No.5 of the "RED BIRD", identical with cor. No.6 of the "QUARTZ HILL".
0.94	Intersect a mound of stone, 2 ft. base, 1 ft. high, which I accept as cor. No.4 of the "BILLY" claim.
	From cor. No.5 of the "RED BIRD" claim, Sur. No. 510, identical with cor. No.6 of "QUARTZ HILL" claim, Sur. No. 491.
	S.82°20'E., on N. side line of "RED BIRD" claim.
18.31	Intersect the line bet. secs. 20 and 21 at a point 24.87 chs. N.0°02'W., from $\frac{1}{4}$ sec. cor.
21.61	Intersect cor. No.6 of the "RED BIRD" claim, identical with cor. No.6 of the "BONNIE DOON" claim, Sur. No. 512, which is a wooden post, 4 ins. square, projecting 3 ft. above ground, firmly set, mkd. RB-6 on SW. face and BD-6 on SE. face.
	Thence
	S.82°00'E., on N. side line of the "BONNIE DOON", claim, Sur. No. 512.
22.61	Intersect cor. No.5 of the "BONNIE DOON" claim, which is a wooden post, 4 ins. square, projecting 2 $\frac{1}{2}$ ft. above ground, mkd. BD-5 on SW. face.
	Thence
	S.9°00'W., on E. end line of "BONNIE DOON" claim.
8.77	Intersect cor. No.3 of the "BONNIE DOON" claim, which is a wooden post, 4 ins. square, projecting 3 ft. above ground, mkd. BD-3 on NW. face.
	Thence
	N.81°45'W., on S. side line on the "BONNIE DOON" claim.
11.44	Intersect cor. No.7 of the "AZTEC" claim, Sur. No. 486,

Retracement of Patented Mining Claims on T. 13 N., R. 3 W.

Chains	which is a wooden post, 4 ins. square, projecting $2\frac{1}{2}$ ft. above ground, firmly set, mkd. A-7 on SW. face.
	Thence
	S. $7^{\circ}50'$ W., on E. end line of the "AZTEC" claim, Sur. No. 486.
9.11	Intersect cor. No. 3 of the "AZTEC" claim, identical with cor. No. 4 of "COPPER BELL" claim, Sur. No. 515, which is a wooden post, 4 ins. square, projecting 3 ft. above ground, mkd. A-3 on NW. face and CB-4 on SE. face.
	Cor. No. 5 of the "COPPER BELL" claim, Sur. No. 515, a wooden post, 3 ins. square, projecting 3 ft. above ground, mkd. CB-5 on S. face.
	Thence
	S. $35^{\circ}15'$ E., on NE. side line of the "COPPER BELL" claim.
22.40	Intersect cor. No. 6 of the "COPPER BELL" claim, Sur. No. 515, identical with cor. No. 4 of the "SHENANDOAH" claim, Sur. No. 3425, which is a stone $10 \times 10 \times 12$ ins. above ground, mkd. S-4-3425 on S. face.
	Thence
	S. $36^{\circ}18'$ E., on NE. side line of "SHENANDOAH" claim.
22.49	Intersect cor. No. 1 of the "SHENANDOAH" claim, identical with cor. No. 4 of the "GRAND VIEW" claim, both of Sur. No. 3425, which is a stone $6 \times 4 \times 10$ ins. above ground, firmly set, mkd. S-1-3425 on NW. face and GV-4-3425 on SE. face.
	Thence
	S. $73^{\circ}00'$ E., on NE. side line of the "GRAND VIEW" claim.
22.69	Intersect cor. No. 1 of the "GRAND VIEW" claim, identical with cor. No. 4 of the "FAIR VIEW" claim, both of Sur. No. 3425, which is a stone $6 \times 8 \times 12$ ins. above ground, firmly set, mkd. GV-1-3425 on W. face, and FV-4-3425 on SE. face.
	Thence
	S. $67^{\circ}34'$ E., on NE. side line "FAIR VIEW" claim.
12.69	Intersect the line bet. secs. 21 and 28 at a point 4.57 chs. N. $89^{\circ}56'$ W. from the cor. of secs. 21, 22, 27 and 28.
17.64	Intersect the line bet. secs. 27 and 28 at a point 1.89 chs. S. $0^{\circ}01'$ E. from the cor. of secs. 21, 22, 27 and 28.
22.74	Intersect Cor. No. 1 of the "FAIR VIEW" claim, which is a stone $6 \times 8 \times 12$ ins. above ground, firmly set, and mkd. FV-1-3425 on W. face.
	Thence
	N. $53^{\circ}42'$ E. on NW. side line of the "AGUE" claim, Sur. No. 3425.
6.52	Intersect the line bet. secs. 22 and 27 at a point 9.98 chs. E. from the cor. of secs. 21, 22, 27 and 28.
8.65	Intersect the true point for cor. No. 4 of the "AGUE" claim, which falls in Copper Basin highway and is witnessed 22 lks. S. 45° E., by a stone $10 \times 12 \times 12$ ins. above ground, firmly set, and mkd. WC-4-A-3425 on NW. face.
	Thence
	S. $46^{\circ}28'$ E., on NE. end line of the "AGUE" claim.
1.82	Intersect the line bet. secs. 22 and 27 at a point 13.02

Retracement of Patented Mining Claims in T. 13 N., R. 3 W.

Chains	
	chs. E. from the cor. of secs. 21, 22, 27 and 28.
9.09	Intersect cor. No.1 of the "AGUE" claim, which is a stone 6x8x12 ins. above ground, firmly set, and mkd. A-1-3425 on W. face.
	Thence
	S.53°49'W., on SE. side line of "AGUE" claim.
22.67	Intersect the line bet. secs. 27 and 28 at a point 18.42 chs. S.0°01'E., from the cor. of secs. 21, 22, 27 and 28.
23.08	Intersect cor. No.2 of the "AGUE" claim, which is a stone 10x12x12 ins. above ground, firmly set, and mkd. A-2-3425 on N. face.
	Thence
	N.45°00'W., on SW. end line of the "AGUE" claim.
9.07	Intersect cor. No.3 of the "AGUE" claim, Sur. No. 3425, which is a stone 8x10x12 ins. above ground, firmly set, and mkd. A-3-3425 on E. face.
	Thence
	N.53°42'E., on NW. side line of the "AGUE" claim.
5.01	Intersect cor. No.2 of the "FAIR VIEW" claim, Sur. No.3425 which is a stone 8x10x12 ins. above ground, firmly set, and mkd. FV-2-3425 on N. face.
	Thence
	N.67°34'W., on SW. side line of the "FAIR VIEW" claim.
22.70	Intersect cor. No.3 of the "FAIR VIEW" claim, identical with cor. No.2 of the "GRAND VIEW" claim, both of Sur. No. 3425, which is a stone 6x12x12 ins. above ground, firmly set, and mkd. FV-3-3425 on E. face and GV-2-3425 on NW. face.
	Thence
	N.73°00'W., on SW. side line of the "GRAND VIEW" claim.
2.46	Intersect the line bet. secs. 21 and 28, at a point 13.96 chs. S.89°56'E. from the $\frac{1}{4}$ sec. cor.
22.73	Intersect cor. No.3 of the "GRAND VIEW" claim, identical with cor. No.2 of the "SHENANDOAH" claim, both of Sur. No. 3425, which is a stone 6x8x12 ins. above ground, firmly set, and mkd. GV-3-3425 on E. face and S-2-3425 on N. face.
	Thence
	N.53°42'E., on NW. end line of the "GRAND VIEW" claim, identical with SE. end line of the "SHENANDOAH" claim.
9.11	Intersect cor. No.4 of the "GRAND VIEW" claim, identical with cor. No.1 of the "SHENANDOAH" claim, both of Sur. No. 3425.
	From cor. No.2. of the "SHENANDOAH" claim, identical with cor. No.3 of the "GRAND VIEW" claim, both of Sur. No. 3425.
	S.36°18'E., on NE. side line of the "ALBE MARLE" claim, Sur. No. 3425.
7.36	Intersect the line bet. secs. 21 and 28 at a point 1.10 chs. N.89°56'W. from the $\frac{1}{4}$ sec. cor.
8.04	Intersect cor. No. 1 of the "ALBE MARLE" claim, which is a stone 8x8x12 ins. above ground, firmly set, and mkd. AM-1-3425 on W. face.

Retracement of Patented Mining Claims in T. 13 N., R. 3 W.

Chains

- Cor. No. 3 of the "CHICAGO" claim, Sur. No. 485 is a wooden post, 4 ins. square, projecting 2 ft. above ground, and mkd. C-3 on NE. face. Thence,
- N.7°36'W., on W. side line of "CHICAGO" claim.
- 10.00 Intersect the line bet. secs. 20 and 29 at a point 15.94 chs. S.89°56'W., from the cor. of secs. 20, 21, 28 and 29.
- 22.70 Intersect cor. No. 2 of the "CHICAGO" claim, which is a wooden post, unmarked, 4 ins. square, projecting 2½ ft. above ground, and firmly set.

Final Test of Buff No. 18,000,

used by

Benjamin J. Kinsey, U.S. Surveyor.

May 22, 1934; on same meridian as described on page 1 hereof, examine the adjustments of the transit and find no errors; then test the workings of the solar apparatus as follows:

At 9^h00^m a.m., app.t., set off 34°29'N., on the latitude arc; 20°21'N., on the decl. arc; and determine a meridian with the solar which agrees with the true meridian.

At apparent noon, with the latitude arc unchanged, observe the sun on the meridian; the resultant reading of the declination arc is 20°22'N., which agrees with the computed declination of the sun.

At 3^h00^m p.m., app.t., with latitude arc unchanged, set off 20°24'N., on the decl. arc and determine a meridian with the solar which agrees with the true meridian.

As all of the observations, taken during the usual hours of solar work agree within 1 minute of the true meridian, conclude that the adjustments of the instrument have been maintained during the surveys described in the foregoing notes.

Final Test of Young & Sons No. 8487

used by

Robert H. Fischer, U.S. Transitman.

June 13, 1934; on same meridian as described on page 1 hereof, examine the adjustments of the transit and find no errors; then test the workings of the solar apparatus as follows:

At 9^h00^m a.m., app.t., set off 34°29'N., on the latitude arc; 23°13'N., on the decl. arc, and determine a meridian with the solar which agrees with the true meridian.

At 12^h00^m app. noon, with the latitude arc unchanged, observe the sun on the meridian; the resultant reading of the declination arc is 23°13'N., which agrees with the computed declination of the sun.

At 3^h00^m p.m., app.t., with latitude arc unchanged, set off 23°14'N., on the decl. arc and determine a meridian with the solar which agrees with the true meridian.

As all of the observations, taken during the usual hours

of solar work agree within 1 minute of the true meridian, conclude that the adjustments of the instrument have been maintained during the surveys described in the foregoing notes.

Final Test of Buff. No. 17994

used by

Emil Voigt, U. S. C. Engr.

June 30, 1934; on same meridian as described on page 2 hereof, examine the adjustments of the transit and find no errors; then test the workings of the solar apparatus as follows:

At 9^h00^m a.m., app.t., set off 34°29'N., on the latitude arc; 23°12'N., on the decl. arc, and determine a meridian with the solar which agrees with the true meridian.

At 12^h00^m app. noon, with the latitude arc unchanged, observe the sun on the meridian; the resultant reading of the declination arc is 23°12'N., which agrees with the computed declination of the sun.

At 3^h00^m p.m., app.t., with the latitude arc unchanged, set off 23°11'N., on the decl. arc and determine a meridian with the solar which agrees with the true meridian.

As all of the observations, taken during the usual hours of solar work agree within 1 minute of the true meridian, conclude that the adjustments of the instrument have been maintained during the surveys described in the foregoing notes.

GENERAL DESCRIPTION.

Land: lies in the Sierra Prieta Mountains, southwest of Prescott, Arizona, and range in elevation from 5,000 ft. in the SW. corner to 7,000 ft. in the north central part. West Spruce Mountain in sec. 5 and Porter Mountain in sec. 4 both have an altitude slightly exceeding 7,000 ft.

Drainage: the divide of the Sierra Prieta range extends northerly and southerly through the central part of the Tp. West of this divide the drainage is into the Santa Maria river via Kirkland Creek; to the east of the divide the drainage is into the Hassayampa River. An area along the Northeastern part of the Tp. drains into the Agua Fria River via Granite Creek.

Soil: predominating soil consists of a rocky 4th. rate, decomposed granite formation on all slopes. A black sandy loam soil was noted along the bottoms of some of the larger washes.

Timber: yellow pine, oak, juniper and pinion grow heavily throughout the area east of the divide. Along the west slope into Copper Basin in the western and southwestern parts the timber becomes scanty.

Evidence of mineral: The lands are highly mineralized as evidenced by numerous mining developments throughout the township. At the time of survey activity along this line centered chiefly in Copper Basin, where placer mining is carried on.

Watering places: in normal years plenty of water exists on the eastern slope of the divide especially, a number,

of good springs, including Government Spring, in sec. 22, Cold Spring in sec. 14, Quaking Asp Spring in sec. 5 and other smaller springs scattered throughout the area supply water in very dry seasons. Running water was found along the northeastern part of Tp.

Settlement: settlers live in secs. 4, 12, 13, 14, 20 and 32. In the summer season the township because of its high altitude and timber is populated extensively by tourists and campers.

Industry: placer mining formed the chief industry present in the area surveyed at time of same. Grazing also is being done on the lands. The lands are all within the Prescott National Forest Reserve. A good road from Prescott to Skull Valley crosses the township. Other roads are poor.

97
95

BOOK 4089

4-680
(August, 1926)

FIELD ASSISTANTS.

to Robert H. Fischer

NAMES.	CAPACITY.
Howard Blout	1st Chainman
H.A. Weedon	2nd Chainman
Selmer Lundeen	2nd Chainman
Morris Massey	Cornerman
Bryant S. Lennen	Axeman
Thornton Fitzhugh	Axeman
Paul Wolf	Flagman

98
94

BOOK 4089

CERTIFICATE OF UNITED STATES SURVEYOR

I, Robert H. Fischer, U.S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Arizona bearing date of the 16th day of April, 1930, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, resurveyed all those parts or portions of the East boundary and Subdivision Lines of Township 13 North, Range 3 West and surveyed all those parts or portions of the boundary of Tract No. 37 and the Subdivision Lines of

Township 13 North, Range 3 West of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said resurvey and survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such resurvey and survey.

Robert H. Fischer
U. S. Transitman
Miami, Arizona
January 22, 1935

~~APPROVAL~~

~~OFFICE OF U. S. SUPERVISOR OF SURVEYS,~~

~~19~~

~~The foregoing field notes of the survey of~~

~~executed by~~

~~under his special instructions dated~~ 10 ~~having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.~~

~~U. S. Supervisor of Surveys~~

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~

~~has been correctly copied from the original notes on file in this office.~~

~~U. S. Supervisor of Surveys~~

4-680
(August, 1926)

FIELD ASSISTANTS.
to
Benjamin J. Kinsey, U.S. Surveyor

NAMES.	CAPACITY.
Albert Greene	1st Chainman
Mc Millan Pollock	1st Chainman
Herman Shafer	1st Chainman
Howard Osborn	1st Chainman
Selmer Lundeen	2nd Chainman
Howard Osborn	2nd Chainman
H.A. Weedon	2nd Chainman
Lester M. Parker	2nd Chainman
H.A. Weedon	Cornerman
J.H. MoVey	Cornerman
Norman Peterson	Cornerman
W.M. Gavin	Cornerman
Morris Massey	Axman
Paul Wolf	Axman
Thornton Fitzhugh	Axman
Hugh Goff	Axman
Charles Holdren	Axman
Donald Gifford	Axman
Harry Wintz	Axman
Jack Sheley	Flagman
Clark Eldridge	Flagman
Thornton Fitzhugh	Flagman
Walter D. Eldridge	Flagman
Wm. Shafer	Flagman

100
59

BOOK 4089

CERTIFICATE OF UNITED STATES SURVEYOR

I, Benjamin J. Kinsey, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Arizona bearing date of the 16th day of April, 1930, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, retraced all those parts or portions of The boundaries of patented mining claims in Township 13 North, Range 3 West; resurveyed all those parts or portions of the West boundary and subdivision lines of Township 13 North, Range 3 West; and surveyed all those parts or portions of the West Boundary and Subdivision Lines of Township 13 North, Range 3 West of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said retracement, resurvey and survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such retracement, resurvey, and survey.
Phoenix, Arizona.

Benjamin J. Kinsey
U. S. Surveyor.

May 23, 1935.

~~APPROVAL~~

~~Office of U. S. Supervisor of Surveys,~~

~~19~~

~~The foregoing field notes of the survey of~~

~~executed by~~
~~under his special instructions dated~~, 19, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

~~U. S. Supervisor of Surveys~~

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~
~~has been correctly copied from the original notes on file in this office.~~

~~U. S. Supervisor of Surveys~~

101
9a

BOOK 4089

4-680
(August, 1926)

FIELD ASSISTANTS.
to

Emil Voigt, U. S. Cadastral Engineer.

NAMES.	CAPACITY.
Howard Blout	1st chainman
Howard Osborn	2nd "
Paul Wolf	Flagman
Bryant Lennen	Axman
Thornton Fitzhugh	"
Morris Mossey	Cornerman

102
100

BOOK 4089

CERTIFICATE OF UNITED STATES SURVEYOR

I, Emil Voigt U.S. Cadastral Engineer, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Arizona bearing date of the 16th day of April, 1930, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, ~~resurveyed~~ surveyed all those parts or portions of the Subdivision Lines of Township 13 North, Range 3 West and surveyed all those parts or portions of the boundaries of Tracts Nos. 38, 39, 40, and 41, and the Subdivision Lines of Township 13 North, Range 3 West of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said ~~resurvey~~ survey and survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such ~~resurvey~~ survey and survey.

Reno, Nevada, Jan. 30, 1935.

Emil Voigt
 U.S. Cadastral Engineer U. S. Surveyor.

APPROVAL

OFFICE OF U. S. SUPERVISOR OF SURVEYS,
 Denver, Colorado, September 13, 1935

The foregoing field notes of the ~~resurvey~~ survey of the East Boundary, South half of the West Boundary and Part of the Subdivision Lines of T. 13 N., R. 3 W. of the retracement of Boundaries of patented mining claims in T. 13 N., R. 3 W. and of the survey of Boundaries of Tracts Nos. 37, 38, 39, 40 and 41, North half of the West Boundary, and Part (Completion) of the Subdivision Lines of Township 13 North, Range 3 West of the Gila and Salt River Base and Meridian, in the State of Arizona executed by Benjamin J. Kinsey, U.S. Surveyor, Emil Voigt, U.S. Cadastral Engr., & Robert H. Fischer, U.S. Transitman. under ~~his~~ special instructions dated April 16, 1930 - Group 157, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the ~~resurveys~~ retracements and surveys they describe, are hereby approved.

Quentin J. Johnson
 U. S. Supervisor of Surveys.

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~
~~has been correctly copied from the original notes on file in this office.~~

~~U. S. Supervisor of Surveys.~~