

UNITED STATES
DEPARTMENT OF THE INTERIOR
GENERAL LAND OFFICE

BOOK 4233

FIELD NOTES

of RESURVEY of

Gila and Salt River Meridian, East of T. 6 N., R. 1 W.

and

North Boundary of T. 6 N., R. 1 W.

and of SURVEY of

Subdivisional Lines of

Township No. 6 North, Range No. 1 West

Of the Gila and Salt River Meridian,

In the State of Arizona

EXECUTED BY

Raymond F. Moss, Public Land Surveyor

Under special instructions dated July 13, 1939, which provided for the surveys included under Group No228, Arizona, bearing the approval of the Commissioner of the General Land Office under date of August 23, 1939 and assignment instructions dated November 22, 1939.

Resurvey and Survey commenced December 7, 1939

Resurvey and Survey completed January 19, 1940

4233

4233


INDEX DIAGRAM.

Township _____, *Range* _____

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

~INDEX • DIAGRAM~

BOOK 4233

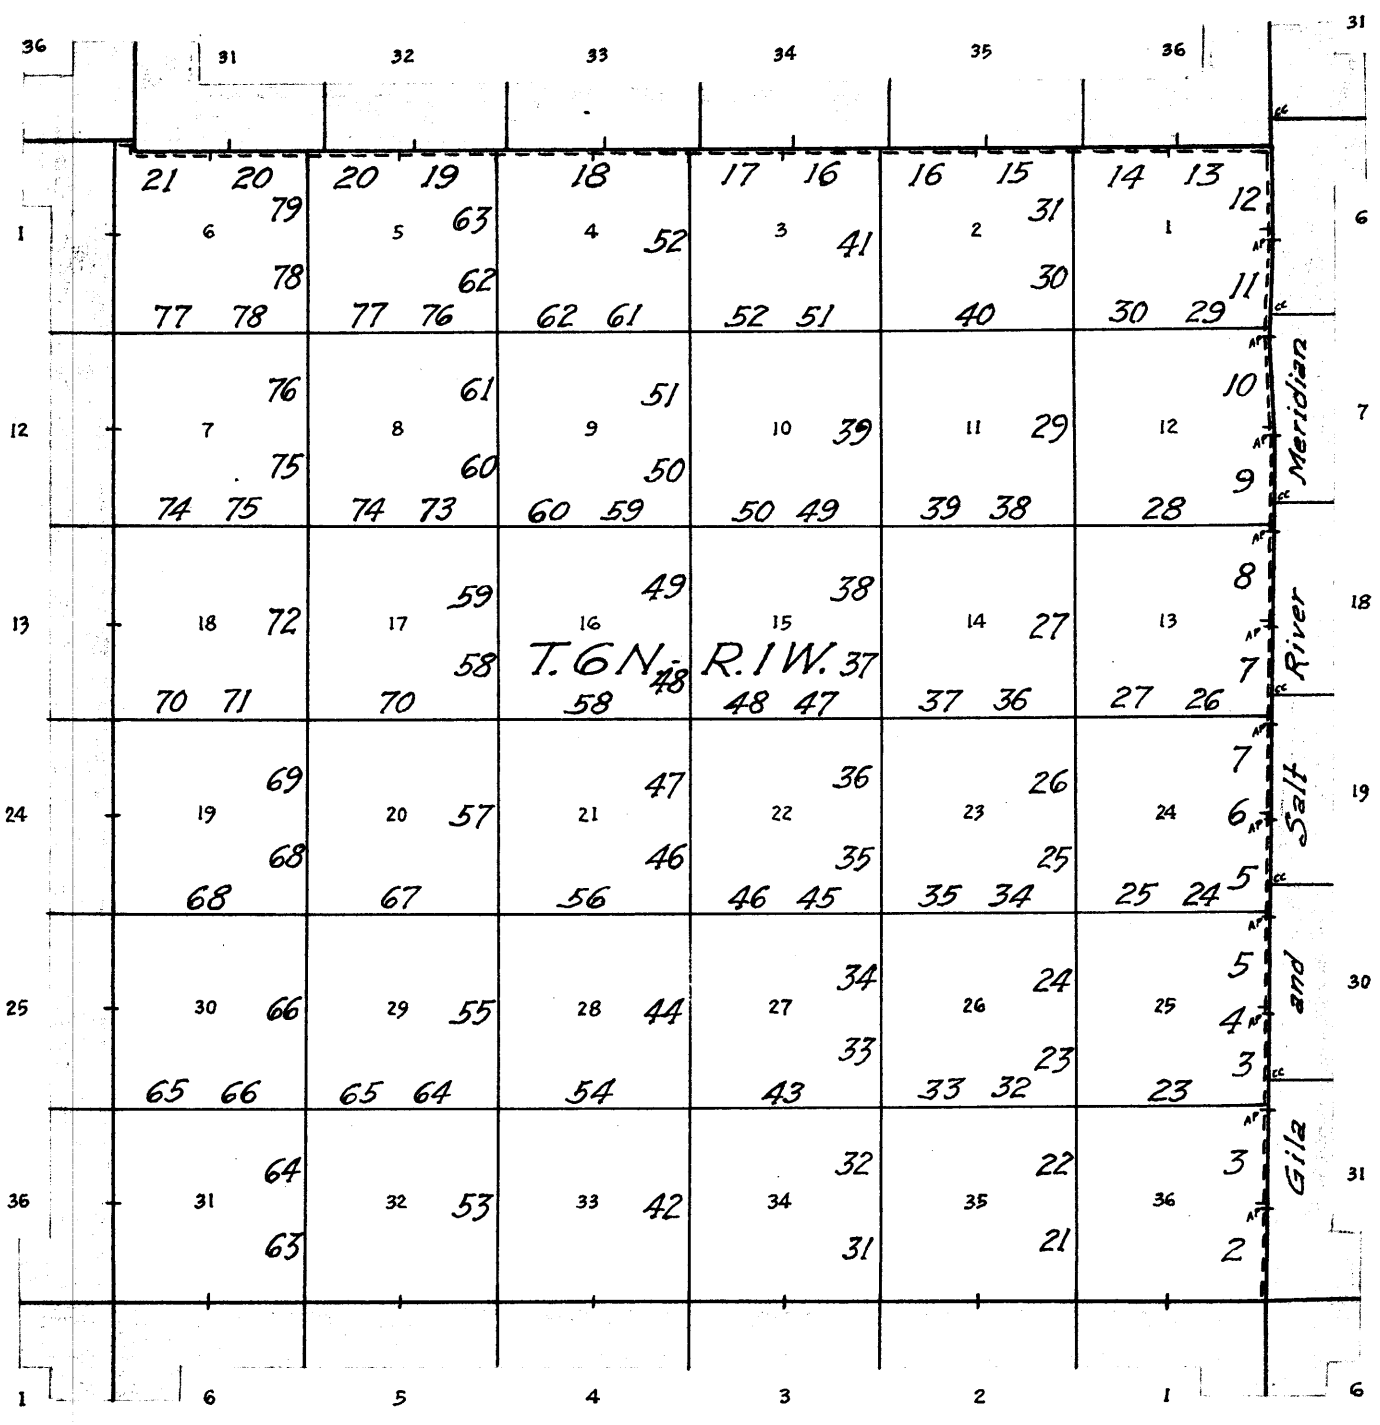

- Lines of accepted surveys or resurveys.
- Lines resurveyed under this group.
- Lines surveyed under this group.
- Areas surveyed as per accepted plats on file.

The surveys and resurveys herein described were executed by Raymond F. Moss, Public Land Surveyor, using Gurley transit No. 371537. This instrument is equipped with an improved Smith solar attachment and otherwise conforms to the standard specifications of the General Land Office. The instrument was examined and tested by the District Cadastral Engineer for California and Arizona prior to the beginning of the surveys of this group, and was approved conditional upon satisfactory results of field tests of same.

The azimuth of all the lines of survey and resurvey herein described were determined with the solar attachment.

All measurements were made with a Dietzgen steel tape, 5 chs. in length, graduated every link for the first 100 lks., and the remainder at intervals of 10 lks. The tape was tested by comparison with a Lufkin standard tape and found correct. All of the measurements were made on the slope, the vertical angle of each interval determined with a clinometer in good adjustment, and the horizontal equivalents entered in the field notes.

PRELIMINARY FIELD TEST OF INSTRUMENT

December 6, 1939; at camp in SW $\frac{1}{4}$ SE $\frac{1}{4}$ of sec. 23, T. 6 N., R. 1 W., Gila and Salt River Meridian, Arizona, in latitude 33°50'30" N., and longitude 112°20' W., examine the adjustments of Gurley transit No. 371537 and find no errors. Watch reads correct 105th meridian time as checked by comparison with Western Union Telegraph Co. clock. To test workings of the solar apparatus of this instrument proceed as follows:

At 7h. 8.9m., a.m., l.m.t., make an hour angle observation on Polaris west of the meridian, making six observations, three each with the telescope in direct and reversed positions, and reading the deflection angles from the west edge of a sahuaro cactus on the skyline about one mile northwesterly, east to Polaris;

Mean watch time of observations, a.m.	7h. 38m. 14s.
Watch fast of l.m.t.	29m. 20s.
Mean horizontal angle from Polaris	
W. to reference point	10°34.3'
Azimuth of Polaris	<u>30.3'</u>
True bearing of reference point	N. 11°04.6' W.

December 6, 1939; at same station, at 9h. 00m., a.m., app. t., set off 33°50'30" N. on the latitude arc; 22°24 $\frac{1}{2}$ ' S. on the declination arc; and determine a meridian with the solar, which agrees with the true meridian.

At app. noon, with the latitude arc unchanged; observe the sun on the meridian and obtain a reading of 22°26' S. on the declination arc, which agrees with the computed declination of the sun.

At 3h. 00m., p.m., app. t., with the latitude arc unchanged; set off 22°26 $\frac{1}{2}$ ' S. on the declination arc, and determine a meridian with the solar, which agrees with the true meridian.

As all of the solar observations made during the usual hours of solar work come within 1'30" of the true meridian, conclude that this instrument is in satisfactory adjustment on this date, prior to the beginning of the surveys herein described.

Resurvey: Gila and Salt River Meridian east of T. 6 N., R. 1 W.

.2

2.

The E. bdy. of T. 6 N., R. 1 W. was surveyed by J.B. McLaughlin, U.S. Deputy Surveyor, in 1883. It was retraced by A.T. Colton, U.S. Deputy Surveyor, in 1894, at which time closing section corners referring to areas E. of line were established along the Meridian. The cor. common to Ts. 5 and 6 N., Rs. 1 E. and 1 W. was reestablished by W.H. Thorn, U.S. Cadastral Engineer, in 1922.

No other retracements or resurveys of this Tp. bdy. are of record. The following notes describe the resurvey of the bdy., altering of original cors. referring to T. 6 N., R. 1 W. to angle points, establishing new cors. at intervals of 40 chs. from the SE. cor. of the Tp., and the remonumenting of closing cors. referring to areas E. of the Meridian.

The cor. of Ts. 5 and 6 N., Rs. 1 E. and 1 W., reestablished in 1922, is an iron post, 3 ins. in diam., projecting 10 ins. above ground, firmly set, properly marked on brass cap, and witnessed as described in the official record.

Thence, N. 0°50' E., on true line, along E. bdy. of sec. 36.

Over mountainous land, thru scattering timber and undergrowth.

Descend 167 ft. over N. slope.


16.90 Draw, course E.; descend slightly.

18.70 Rocky wash, 10 lks. wide, course SE.; ascend 132 ft. over SW. slope to

39.73 The original 1/4 sec. cor. of sec. 36, which is a malpais stone, 12x14x8 ins., set in a small mound of stone, marked 1/4 on E. face, and witnessed by a mound of stone W. Obliterate marks on stone.

Reconstruct this cor. monument with altered reference as follows:


Remove the old Cor. stone and in same place, set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in ground to bedrock over a cross (+) chiseled thereon, with old stone reset alongside, and in a mound of stone to top, for angle point, with brass cap marked



No bearing trees available.

Thence, N. 0°49' E., on true line, continuing measurement of the E. bdy. of sec. 36.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in ground to bedrock over a cross (+) chiseled thereon, in a mound of stone to top, for 1/4 sec. cor. of sec. 36, with brass cap marked



No bearing trees available.

Resurvey: Gila and Salt River Meridian east of T. 6 N., R. 1 W.

BOOK 4288

3.

Continue over mountainous land.

Ascend 97 ft. over SW. slope.


52.00 Ridge, bears E. and W.; descend 180 ft. over NW. slope.

69.40 Wash, 50 lks. wide, 3 ft. deep, course S. 75° E.; ascend 57 ft. over S. slope to

79.32 The original cor. of secs. 25 and 36, which is a malpais stone 10x8x6 ins. above ground, firmly set, marked with 1 notch on S. and 5 notches on N. edges, and witnessed by a mound of stone W. Obliterate marks on stone.

Reconstruct this cor. monument with altered reference as follows:


Remove the old cor. stone and in same place, set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in ground to bedrock over a cross(+) chiseled thereon, with old stone reset alongside, and in a mound of stone to top, for angle point, with brass cap marked



No bearing trees available.

Thence, N. 0°50' E., on true line, continuing measurement of the E. bdy. of sec. 36.

80.01 Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in ground to bedrock, in a mound of stone to top, for cor. of secs. 25 and 36, with brass cap marked



No bearing trees available.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, mountainous.
Soil, volcanic ash, rocky, 3rd and 4th rates.
Timber, palo verde, ironwood, catclaw, and mesquite.
Undergrowth, sage, greasewood, palo verde, ocatillo, and cacti.

N. 0°50' E., on true line, on E. bdy. of sec. 25.

Over mountainous land, thru scattering timber and undergrowth.

Ascend 20 ft. over S. slope.

6.30 Spur, slopes E.; descend 63 ft. over NE. slope.

9.97 Intersect the closing cor. of secs. 30 and 31, which is a granite stone 5x8x6 ins. above ground, firmly set, marked CC on E. face, 1 notch on S. and 5 notches on N. edges, and witnessed by a mound of stone N.

Resurvey: Gila and Salt River Meridian east of T. 6 N., R. 1 W.

4

4.

Reconstruct this corner monument as follows:

Remove the old cor. stone and in same place, set an iron post, 3 ft. long, 2 ins. in diam., 6 ins. in ground to bedrock over a cross (+) chiseled thereon, with old stone reset alongside, and in a mound of stone to top, for closing cor. of secs. 30 and 31, with brass cap marked

T6N	T6N
S25	S30
	S31
RLW	RL1E

1939

No bearing trees available.

Continue over NE. slope; descend 29 ft.

29.10 Gulch, course E.; ascend 34 ft. over SE. slope.

32.30 Short spur, slopes E.; descend 22 ft. over N. slope.

36.60 Wash, 20 lks. wide, course SE.; ascend 15 ft. over SE. slope.

39.19 The original $\frac{1}{4}$ sec. cor. of sec. 25, which is a granite stone, 10x12x6 ins. above ground, firmly set, marked $\frac{1}{4}$ on S. face, and witnessed with a mound of stone W. Obliterate marks on stone.

Reconstruct this cor. monument with altered reference as follows.

Remove the old cor. stone and in same place, set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in ground to bedrock over a cross (+) chiseled thereon, with old stone reset alongside, and in a mound of stone to top, for angle point, with brass cap marked

S25	AP
	S30

1939

No bearing trees available.

Thence, N. 0°18' E., on true line, continuing measurement of E. bdy. of sec. 25.

Ascend slightly over SE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground to bedrock over a cross (+) chiseled thereon, in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 25, with brass cap marked

$\frac{1}{4}$ S25	
-------------------	--

1939

No bearing trees available.

Continue over SE. slope; ascend 49 ft.

47.00 Spur, slopes E.; descend 30 ft. over N. slope.

50.40 Wash, 20 lks. wide, course E.; ascend 75 ft. over S. slope.

54.20 Short spur, slopes SE.; descend 50 ft. along E. slope.

Resurvey: Gila and Salt River Meridian east of T. 6 N., R. 1 W.

BOOK 4238

.5

5.

Chains


66.30 Wash, .10 lks. wide, course S. 30° E.; ascend 119 ft. over SW, slope.

77.70 Ridge, bears NW, and SE.; descend slightly over NE. slope to

79.00 The original cor. of secs. 24 and 25, which is a granite stone, 6x10x12 ins. above ground, firmly set, marked with 2 notches on S. and 4 notches on N. edges, and witnessed by a mound of stone W. Obliterate marks on stone.

Reconstruct this corner monument with altered reference as follows:

Remove the old cor. stone and in same place, set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in ground to bedrock over a cross (+) chiseled thereon, with old stone reset alongside, and in a mound of stone to top, for angle point, with brass cap marked




No bearing trees available.

Thence, N. 1°26' E., continuing measurement of E. bdy. of sec. 25.

Descend 10 ft. over NE. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 2 ins. in ground to bedrock over a cross (+) chiseled thereon, in a mound of stone to top, for cor. of secs. 24 and 25, with brass cap marked



No bearing trees available.

Land, mountainous.
Soil, volcanic ash, rocky, 3rd and 4th rates.
Timber, palo verde, ironwood, catclaw, and mesquite.
Undergrowth, sage, greasewood, palo verde, ocotillo, and cacti.

N. 1°26' E., on true line, on E. bdy. of sec. 24.

Over mountainous land, thru scattering timber and undergrowth.


Descend 47 ft. over NE. slope.

8.50 Head of gulch, course E.; ascend 10 ft. over SE. slope to

9.54 Intersect the closing cor. of secs. 19 and 30, which is a malpais stone, 6x8x10 ins. above ground, firmly set, marked CC on E. face, 2 notches on S. and 4 notches on N. edges, and witnessed by a mound of stone W.

Reconstruct this cor. monument as follows:

Chains Remove the old cor. stone and in same place, set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in ground to bedrock over a cross (+) chiseled thereon, with old stone reset alongside, and in a mound of stone to top, for closing cor. of secs. 19 and 30; with brass cap marked



No bearing trees available.

Continue over SE. slope; ascend slightly.

10.40 Short spur, slopes E.; descend 125 ft. over N. slope.

21.70 Rocky gulch, course E.; ascend 93 ft. over broken SE. slope.


31.70 Spur, slopes E.; descend 86 ft. over NE. slope.

38.50 Wash, 20 lks. wide, course E.; ascend slightly over S. slope to

38.63 The original $\frac{1}{4}$ sec. cor. of sec. 24, which is a granite stone, 8x8x8 ins. above ground, firmly set, marked $\frac{1}{4}$ on E. face. No accessories. Obliterate marks on stone.

Reconstruct this cor. monument with altered reference as follows:

Remove the old stone and in same place, set an iron post, 3 ft. long; 1 in. in diam., 6 ins. in ground to bedrock over a cross (+) chiseled thereon, with old stone reset alongside, and in a mound of stone to top, for angle point, with brass cap marked




No bearing trees available.

Thence, N. 0°08' E., continuing measurement of E. bdy. of sec. 24.

Ascend 17 ft. over S. slope to

40.01 Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in ground to bedrock over a cross (+) chiseled thereon, with a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 24, with brass cap marked



No bearing trees available.

Continue over S. slope; ascend 69 ft.

45.00 Spur, slopes E.; descend 178 ft. over NE. slope.

56.10 Morgan City Wash, 100 lks. wide, course S. 75° E. An unimproved road following the bed of the wash bears N. 75° W. and S. 75° E.

Ascend 197 ft. over broken SW. slope to

Resurvey: Gila and Salt River Meridian east of T. 6 N., R. 1 W.


Chains

78.24

The original cor. of secs. 13 and 24, which is a granite stone, 10x16x8 ins. above ground, marked 3 notches on S. and 3 notches on N. edges, and witnessed by a mound of stone W. Obliterate marks on stone.

Reconstruct this cor. monument with altered reference as follows:

Remove old cor. stone and in same place, set an iron post, 3 ft. long, 1 in. diam., 8 ins. in ground to bedrock over a cross (+) chiseled thereon, with old stone reset alongside, and in a mound of stone to top, for angle point, with brass cap marked




No bearing trees available.

Thence, N. 0°31' E., on true line, continuing measurement of E. bdy. of sec. 24.

Ascend 39 ft. over SW. slope to

80.01

Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in ground to bedrock over a cross (+) chiseled thereon, in a mound of stone to top, for cor. of secs. 13 and 24, with brass cap marked



No bearing trees available.

Land, mountainous.

Soil, volcanic ash, rocky, 3rd and 4th rates.

Timber, palo verde, ironwood, catclaw, and mesquite.

Undergrowth, sage, greasewood, palo verde, ocatillo, and cacti.

N. 0°31' E., on true line, on E. bdy. of sec. 13.

Over mountainous land, thru scattering timber and undergrowth.

Ascend slightly.

5.90

Short spur, slopes SE.; descend 116 ft. over NE. slope to gulch.

8.54

The closing cor. of secs. 18 and 19, which is a granite stone, 12x16x24 ins. above ground, firmly set, marked CC on E. face, 3 notches on S. and 3 notches on N. edges, and witnessed by a mound of stone W., bears W. 127 lks. dist.

16.00

Gulch, course E.; ascend 75 ft. over SE. slope.

24.20

Spur, slopes SE.; descend 60 ft. over NE. slope.

30.20

Rocky wash, 10 lks. wide, course S. 70° E.; ascend 57 ft. over S. slope to

Resurvey: Gila and Salt River Meridian east of T. 6 N., R. 1 W.

.8

8.

Chains
38.07

The original $\frac{1}{4}$ sec. cor. of sec. 13, which is a malpais stone, 6x6x6 ins. above ground, firmly set, marked $\frac{1}{4}$ on E. face, and witnessed by a mound of stone W. Obliterate marks on stone.

Reconstruct this cor. monument with altered reference as follows:

Remove the old cor. stone and in same place, set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, with old stone reset alongside, for angle point, with brass cap marked

$\begin{array}{c} \uparrow \text{ AP} \\ \text{S13} \mid \text{S18} \\ \text{1939} \end{array}$

No bearing trees available.

Rebuild the mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Thence, N. 1°24' E., on true line, continuing measurement of E. bdy. of sec. 13.

Ascend 28 ft. over S. slope to

40.00

Top of spur, slopes E.
Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in ground to bedrock over a cross (+) chiseled thereon, in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 13, with brass cap marked

$\begin{array}{c} \frac{1}{4} \text{S13} \mid \\ \text{1939} \end{array}$

No bearing trees available.

Descend 46 ft. over N. slope.

48.20

Rocky gulch, course E.; ascend 186 ft. over S. slope.

59.50

Ridge, bears E. and W.; descend 100 ft. over N. slope.

70.90

Gulch, course E.; ascend 80 ft. over SE. slope.

74.70

Short spur, slopes E.; descend 68 ft. over NE. slope to

77.62

The original cor. of secs. 12 and 13, which is a granite stone, 6x10x8 ins. above ground, firmly set, marked 4 notches on S. and 2 notches on N. edges, and witnessed by a mound of stone W. Obliterate marks on stone.

Reconstruct this cor. monument with altered reference as follows.

Remove the old cor. stone and in same place, set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in ground to bedrock over a cross (+) chiseled thereon, with old stone reset alongside, and in a mound of stone to top, for angle point, with brass cap marked

$\begin{array}{c} \text{T6N} \\ \text{RLW} \mid \text{RLS} \\ \text{S13} \mid \text{S18} \\ \text{1939} \end{array}$

No bearing trees available.

Resurvey: Gila and Salt River Meridian east of T., 6 N., R. 1 W.

BOOK 4288 9.

Chains

Thence, N. 0°28' E., on true line, continuing measurement of E. bdy. of sec. 13.

Descend 73 ft. over NE. slope.

79.90 Rocky wash, 20 lks. wide, course S. 60° E.

80.01 True point for cor. of secs. 12 and 13 falls on perpendicular bank of wash, where it is impracticable to monument the cor., therefore establish witness cor. N. 0°28' E., 50 lks. dist. as hereinafter described.

Land, mountainous.

Soil, volcanic ash, rocky, 3rd and 4th rates.

Timber, palo verde, ironwood, catclaw, and mesquite.

Undergrowth, sage, greasewood, palo verde, ocotillo, and cacti.

N. 0°28' E., on true line, on E. bdy. of sec. 12,
From true point for cor. of secs. 12 and 13.

Over mountainous land, thru scattering timber and undergrowth.

Ascend 18 ft. over SW. slope to

0.50 Set and iron post, 3 ft. long, 2 ins. in diam., 10 ins. in ground to bedrock over a cross (+) chiseled thereon, in a mound of stone to top, for witness cor. to the cor. of secs. 12 and 13, with brass cap marked

T6N	T6N
S12	R1E
S13	S18
RLW	
	WC
	1939

No bearing trees available.

Continuing over SW. slope; ascend 72 ft. to

7.61 Intersect the closing cor. of secs. 7 and 18, which is a malpais stone, 10x12x14 ins., loosely set in a scattered mound of stone, marked CC on E. face, 4 notches on S. and 2 notches on N. edges. No accessories.

Reconstruct this cor. monument as follows:

Remove the old cor. stone and in same place, set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in ground to bedrock over a cross (+) chiseled thereon, with old stone reset alongside, and in a mound of stone to top, for closing cor. of secs. 7 and 18, with brass cap marked

T6N	T6N
S12	S7 CC
RLW	S18
	R1E
	1939

No bearing trees available.

Continuing over SW. slope; ascend 28 ft.

9.30 Short spur, slopes SE.; descend 57 ft. over NE. slope.

13.90 Wash, 20 lks. wide, course SE.; ascend 147 ft. over SW. slope.

Resurvey: Gila and Salt River Meridian east of T. 6 N., R. 1 W.

10

10.

Chains	
24.10	Long spur, slopes SE.; thence along broken E. slope to
36.84	The original $\frac{1}{4}$ sec. cor. of sec. 12, which is a malpais stone, 10x14x24 ins., set in a mound of stone, marked $\frac{1}{4}$ on W. face, and witnessed by a mound of stone W. Obliterate marks on stone.
	Reconstruct this cor. monument with altered reference as follows:
	Remove the old cor. stone and in same place, set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground to bedrock over a cross (+) chiseled thereon, with old stone reset alongside, and in a mound of stone to top, for angle point, with brass cap marked.
	No bearing trees available.
	Thence, N. 3°05' W., on true line, continuing measurement of E. bdy. of sec. 12.
	Descend 12 ft. along E. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in ground to bedrock over a cross (+) chiseled thereon, in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 12, with brass cap marked
	No bearing trees available.
	Continuing along broken E. slope; descend slightly.
43.70	Ridge, bears E. and W.; descend 215 ft. along broken NE. slope.
54.70	Wash in canyon, 15 lks. wide, course E.; ascend 80 ft. over SE. slope.
62.70	Short spur, slopes E.; descend 160 ft. over NE. slope.
74.70	Junction of washes from NW. and S. 25° E., course NE.; ascend 20 ft. over SE. slope to
76.71	Top of ascent; The original cor. of secs. 1 and 12, which is a granite stone, 8x12x14 ins. above ground, firmly set, marked 5 notches on S. and 1 notch on N. edges, and witnessed by a mound of stone W. Obliterate marks on stone.
	Reconstruct this cor. monument with altered reference as follows:
	Remove the old cor. stone and in same place, set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in ground to bedrock over a cross (+) chiseled thereon, with old stone reset alongside, and in a mound of stone to top, for angle point, with brass cap marked

Chains

	T6N	
RLW		RLE
		AP
S12		S7
		1939

No bearing trees available.

Thence, N. 2°33' E., on true line, continuing measurement of E. bdy. of sec. 12.

Along broken E. slope to

80.05 Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in ground to bedrock over a cross (+) chiseled thereon, in a mound of stone to top, for cor. of secs. 1 and 12, with brass cap marked

T6N		T6N
S1		RLE
S12		
RLW		S7
		1939

No bearing trees available.

Land, mountainous.

Soil, volcanic ash, rocky, 3rd and 4th rates.

Timber, palo verde, ironwood, catclaw, and mesquite.

Undergrowth, sage, greasewood, palo verde, ocotillo, and cacti.

N. 2°33' E., on true line, on E. bdy. of sec. 1.

Over mountainous land, thru scattering timber and undergrowth.

Ascend 35 ft. along broken E. slope.

5.60 Gully, course SE.; ascend 10 ft. over S. slope to

5.74 Intersect the closing cor. of secs. 6 and 7, which is a malpais stone, 10x12x8 ins. above ground, loosely set in a scattered mound of stone, marked CC on E. face, 5 notches on S. and 1 notch on N. edges, and witnessed by a mound of stone W.

Being on unsafe ground, it is impracticable to reconstruct the cor. monument at this point, therefore establish a witness cor. N. 2°33' E., 1.00 ch. dist., as hereinafter described.

Ascend 26 ft. over S. slope.

6.74 Set an iron post, 3ft. long, 2 ins. in diam., 16 ins. in ground to bedrock over a cross (+) chiseled thereon, with old stone set alongside, and in a mound of stone to top, for a witness cor. to the closing cor. of secs. 6 and 7, with brass cap marked

T6N		T6N
S1		S6
		S7
RLW		RLE
		WC
		1939

No bearing trees available.

Resurvey: Gila and Salt River Meridian east of T. 6 N., R. 1 W.

.12

12.

Chains

Continuing over S. slope; ascend 110 ft.

22.40 Short spur, slopes E.; descend 80 ft. over NE. slope.

29.40 Wash in canyon, 15 lks. wide, course SE.; ascend 155 ft. over SW. slope to

36.17 The original $\frac{1}{4}$ sec. cor. of sec. 1, which is a malpais stone, 10x10x12 ins. above ground, firmly set, marked $\frac{1}{4}$ on W. face, and witnessed by a mound of stone W. Obliterate marks on stone.

Reconstruct this cor. monument with altered reference as follows:

Remove the old cor. stone and in same place, set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in ground to bedrock over a cross (+) chiseled thereon, with old stone reset alongside, and, in a mound of stone to top, for angle point, with brass cap marked

$\begin{array}{c} \uparrow \text{AP} \\ \text{S1} \mid \text{S6} \\ 1939 \end{array}$

No bearing trees available.

Thence, N. 1°41' W., on true line, continuing measurement of E. bdy. of sec. 1.

Ascend 93 ft. over SW. slope to

40.04 True point for $\frac{1}{4}$ sec. cor. of sec. 1, falls on cliff, where it is impracticable to monument cor., therefore establish witness cor. N. 1°41' W., 2.00 chs. dist. as hereinafter described.

Ascend 59 ft. over precipitious SW. slope to

42.04 Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in ground to bedrock over a cross (+) chiseled thereon, in a mound of stone to top, for witness cor. to $\frac{1}{4}$ sec. cor. of sec. 1, with brass cap marked

$\begin{array}{c} \frac{1}{4} \text{S1} \mid \\ \text{W} \mid \text{C} \\ 1939 \end{array}$

No bearing trees available.

U.S.C. & G.S. monument, "CHOLLA", established in 1924, bears N. 54°52' E., 7.06 chs. dist.

Maricopa - Yavapai county line monument No. 19, bears S. 74°25' E., 26.49 chs. dist.

Ascend 14 ft. over SW. slope.

44.30 Ridge, bears N. 60° W. and S. 60° E.; descend 477 ft. over precipitious NE. slope.

66.70 Wash, 100 lks. wide, course SE.; ascend 190 ft. over SW. slope to

75.74 The original cor. of Ts. 6 and 7 N., R. 1 W., which is a malpais stone, 8x8x8 ins. above ground, firmly set, marked 6 grooves on N. S. E. and W. faces, and witnessed by a mound of stone W.

Reconstruct this cor. monument as follows:

Chains

Remove the old cor. stone and in same place, set an iron post, 3 ft. long, 3 ins. in diam., 14 ins. in ground to bedrock over a cross (+) chiseled thereon, with old stone reset alongside, and in a mound of stone to top, for cor. of Ts. 6 and 7 N., R. 1 W., with brass cap marked

T7N	T6N
R1W	
S36	R1E
S1	
T6N	S6
1939	

No bearing trees available.

Land, mountainous.
Soil, volcanic ash, rocky, 3rd and 4th rates.
Timber, palo verde, ironwood, catclaw, and mesquite.
Undergrowth, sage, greasewood, palo verde, ocotillo, and cacti.

Resurvey: N. bdy. of T. 6 N., R. 1 W.

The N. bdy. of T. 6 N., R. 1 W. was surveyed by F.B. Jacobs, U.S. Deputy Surveyor, in 1894, establishing all cors. thereon with common reference to areas in Ts. 6 and 7 N., R. 1 W. The W. 2 miles of this bdy. were resurveyed by J.P. Davis, U.S. Surveyor, in 1919, reestablishing all cor. monuments thereon with reference to areas in T. 7 N., R. 1 W. only, except the SW. cor. of said Tp., which he reestablished for reference to Ts. 6 and 7 N., Rs. 1 and 2 W. In 1924, G.F. Sawyer, U.S. Surveyor, altered the cor. of Ts. 6 and 7 N., Rs. 1 and 2 W. to refer to T. 7 N., R. 1 W. (SW. cor.), only.

No other retracement or resurvey of any part of this Tp. bdy. is of record.

The following notes describe a resurvey of the entire N. bdy. of T. 6 N., R. 1 W., accomplished by the alteration of the existing cors. on the E. 4 miles of the line, to refer to areas in T. 7 N., R. 1 W., only; reestablishing the N. 1/4 sec. cors. of the N. tier of secs. in T. 6 N., R. 1 W. at midpoints bet. closing cors. of said secs., except on N. bdys. of secs. 1 and 6, where the N. 1/4 sec. cors. are reestablished at 40 chs. in E. and W. departures measurement, respectively, from the closing cors. of secs. 1 and 2, and secs. 5 and 6. The N. bdy. of sec. 6 is resurveyed westerly along S. bdy. of sec. 31, to SW. cor. of T. 7 N., R. 1 W.; thence offsetting on W. bdy. of said Tp., to the SE. cor. of T. 7 N., R. 2 W.; thence, along the S. bdy. of T. 7 N., R. 2 W., to the cor. of T. 6 N., Rs. 1 and 2 W.

Retracement was made of the S. bdy. of T. 7 N., R. 1 W., preliminary to this resurvey, but the record of same is omitted herein, and only true lines recorded.

From the cor. of Ts. 6 and 7 N., R. 1 W., on the Gila and Salt River Meridian, hereinbefore described

S. 89°40' W., on true line, on N. bdy. of sec. 1.

Over mountainous land, thru medium timber and undergrowth.

Descend 147 ft. over SW. slope.

10.40 Wash, 60 lks. wide, course SE.; ascend 176 ft. over NE. slope.

Resurvey: N. bdy. of T. 6 N., R. 1 W.

Chains	
29.80	Short spur, slopes N.; descend 87 ft. over W. slope.
33.50	Gulch, course N.; ascend 35 ft. over NE. slope.
35.80	Short spur; slopes N.; descend 35 ft. over W. slope.
39.10	Gulch, course NE.; ascend slightly to
39.36	The original $\frac{1}{4}$ sec. cor. of secs. 1 and 36, which is a malpais stone, 14x18x30 ins., set in a mound of stone, and marked $\frac{1}{4}$ on S. face.
	Reconstruct this cor. monument with altered reference as follows:
	Remove old cor. stone and in same place, set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in ground to bedrock with a stone 6x6x4 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 36, with brass cap marked
	<u>$\frac{1}{4}$S36</u>
	1939
	No bearing trees available.
	Thence, N. 89°28' W., on true line, continuing measurement of N. bdy. of sec. 1.
	Ascend 35 ft. over E. slope to
43.22	(40.00 chs. easterly from closing cor. of secs. 1 and 2) Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 1, with brass cap marked
	<u>$\frac{1}{4}$S1</u>
	1939
	No bearing trees available.
	Descend slightly.
44.20	Gulch, course NE.; ascend 76 ft. over E. slope.
54.00	Short spur, slopes N.; descend 20 ft. over W. slope.
56.00	Gulch, course N.; ascend 40 ft. over E. slope.
60.40	Low spur, slopes N.; thence, along broken N. slope.
70.90	Gulch, course NE.; ascend 80 ft. over NE. slope to
79.22	The original cor. of secs. 1, 2, 35, and 36, which is a limestone, 6x12x24 ins., set in a mound of stone, and marked 1 notch on E. and 5 notches on W. edges.
	Reconstruct this cor. monument with altered reference as follows:
	Remove the old cor. stone and in same place, set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in ground to bedrock over a cross (+) chiseled thereon, with old stone reset alongside, and in a mound of stone to top, for cor. of secs. 35 and 36, with brass cap marked
	T7N R1W S35 S36 T6N R1W S1 1939

Resurvey: N. bdy. of T. 6 N., R. 1 W.

BOOK 447

15.

Chains

. No bearing trees available.

Thence, N. 89°54' W., on true line, continuing measurement of N. bdy. of sec. 1.

Ascend 17 ft. over NE. slope.

80.40 Ridge, bears NW. and SE.; descend 31 ft. over W. slope to

83.22 Intersect the subdivisional line bet. secs. 1 and 2 surveyed North.

Closing cor. of said secs. established at this point as hereinafter described.

Land, mountainous.

Soil, volcanic ash, rocky, 3rd and 4th rates.

Timber, palo verde, ironwood, and mesquite.

Undergrowth, sage, palo verde, greasewood, cacti and ocotillo.

N. 89°54' W., on true line, on N. bdy. of sec. 2.

Over mountainous and sharply rolling land, thru scattering timber and medium undergrowth.

Descend 34 ft. over W. slope.

3.70 Head of gulch, course SW.; ascend 42 ft. over broken SE. slope to $\frac{1}{4}$ sec. cor.

6.00 Old road, bears NE. and SW.

35.89 The original $\frac{1}{4}$ sec. cor. of secs. 2 and 35, which is a malpais stone, 14x18x28 ins., set in a mound of stone, and marked $\frac{1}{4}$ on N. face.

Reconstruct this cor. monument with altered reference as follows:

Remove the old cor. stone and in same place, set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground to bedrock, over a cross(+) chiseled thereon, with old stone reset alongside, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 35, with brass cap marked $\frac{1}{4}$ S35

1939

No bearing trees available.

Thence, S. 89°57' W., on true line, continuing measurement of N. bdy. of sec. 2.

Ascend 13 ft. along rolling S. slope.

39.80 Short spur, slopes S.; descend slightly over SW. slope to

40.00 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground to bedrock over a cross (+) chiseled thereon, in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 2, with brass cap marked $\frac{1}{4}$ S2

1939

No bearing trees available.

Continuing over SW. slope, descend 46 ft.

Resurvey: N. bdy. of T. 6 N., R. 1 W.

Chains 43.20 56.40 65.20 74.90 75.75	<p>Short drain, course S.; thence along rolling S. slope.</p> <p>Gulch, course SE.; continue along rolling S. slope.</p> <p>Gulch, course S. 70° E.; thence along gentle N. slope.</p> <p>Same gulch, course N. 70° E.; ascend slightly over SE. slope to</p> <p>The original cor. of secs. 2, 3, 34, and 35, which is a sandstone, 6x14x24 ins., set in a mound of stone, and marked 2 notches on E. and 4 notches on W. edges. No accessories.</p> <p>Reconstruct this cor. monument with altered reference as follows:</p> <p>Remove the old cor. stone and in same place, set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in ground to bedrock over a cross (+) chiseled thereon, with old stone reset alongside, and in a mound of stone to top, for cor. of secs. 34 and 35, with brass cap marked</p> <table style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 2px;">T7N</td> <td style="padding: 2px;">R1W</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">S34</td> <td style="padding: 2px;">S35</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">T6N</td> <td style="padding: 2px;">R1W.</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 2px;">S2</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 2px;">1939</td> </tr> </table> <p>No bearing trees available.</p> <p>Thence, S. 89°59' W., on true line, continuing measurement of N. bdy. of sec. 2.</p> <p>Ascend 48 ft. over SE. slope to</p>	T7N	R1W	S34	S35	T6N	R1W.	S2		1939	
T7N	R1W										
S34	S35										
T6N	R1W.										
S2											
1939											
80.00	<p>Intersect the subdivisional line bet. secs. 2 and 3 surveyed N. 0°01' W.</p> <p>Closing cor. of said secs. established at this point as hereinafter described.</p> <p>Land, mountainous and sharply rolling. Soil, volcanic ash, rocky, 3rd and 4th rates. Timber, palo verde, ironwood, catclaw, and mesquite. Undergrowth, sage, greasewood, palo verde, cacti, and ocotillo.</p> <hr/> <p>S. 89°59' W., on true line, on N. bdy. of sec. 3.</p> <p>Over mountainous and sharply rolling land, thru scattering timber and medium undergrowth.</p> <p>Ascend 198 ft. over SE. slope.</p>										
9.90	<p>Point on ridge, bearing N. 70° E. and NW., from which a long spur slopes SE.; descend 239 ft. over SW. slope.</p>										
35.00	<p>Gulch, course SE.; thence, over sharply rolling land.</p>										
35.09	<p>The original $\frac{1}{4}$ sec. cor. of secs. 3 and 34, which is a malpais stone, 8x12x14 ins. above ground, firmly set, and marked $\frac{1}{4}$ on N. face. No accessories.</p> <p>Reconstruct this cor. monument with altered reference as follows:</p> <p>Remove the old cor. stone and in same place, set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in ground to bedrock over a cross (+) chiseled thereon, with old stone reset alongside, and in a mound of stone to top,</p>										

Resurvey: N. bdy. of T. 6 N., R. 1 W.

BOOK 4238

Chains

for 1/4 sec. cor. of sec. 34, with brass cap marked

1834

1939

No bearing trees available.

Thence, N. 89°54' W., on true line, continuing measurement of N. bdy. of sec. 3.

Continue over sharply rolling land.

39.97 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., .14 ins. in ground to bedrock over a cross (+) chiseled thereon, in a mound of stone to top, for 1/4 sec. cor. of sec. 3, with brass cap marked

183

1939

No bearing trees available.

Continue over sharply rolling land.

46.40 Gulch, course S. 60° E., ascend 23 ft. along rolling N. slope.

63.00 Same gulch, course N. 60° E.; ascend 46 ft. over SE. slope.

73.50 Ridge, bears NE. and SW.; descend 14 ft. over W. slope to

74.76 The original cor. of secs. 3, 4, 33, and 34, which is a malpais stone, 10x16x22 ins., set in a mound of stone, and marked 3 grooves on E. and 3 grooves on W. faces.

Reconstruct this cor. monument with altered reference as follows:

Remove the old cor. stone and in same place, set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in ground, with old stone reset alongside, for cor. of secs. 33 and 34, with brass cap marked

T7N	RLW
S33	S34
T6N	RLW

S3

1939

An ironwood, 7 ins. in diam., bears N. 8° E., 36 lks. dist., marked T7N RLW S34 BT.

An ironwood, 8 ins. in diam., bears N. 29 1/2° W., 199 lks. dist., marked T7N RLW S33 BT.

Thence, N. 89°36' W., on true line, continuing measurement of N. bdy. of sec. 3.

Descend 25 ft. over W. slope.

77.10 Drain, course NW.; descend 32 ft. over NW. slope to

79.94 Intersect the subdivisional line bet. secs. 3 and 4 surveyed N. 0°01' W.

Closing cor. of said secs. established at this point as hereinafter described.

Land, mountainous and rolling.

Soil, volcanic ash, rocky, 3rd and 4th rates.

Timber, palo verde, mesquite, ironwood, and catclaw.

Undergrowth, greasewood, palo verde, sage, and cacti.

Resurvey: N. bdy. of T. 6 N., R. 1 W.

.18

18.

Chains

N. 89°36' W., on true line, on N. bdy. of sec. 4.

Over mountainous land, thru scattering timber and medium undergrowth.

Descend slightly over W. slope.

2.30 Gulch, course N. 50° W.; ascend 38 ft. along N. slope.

19.40 Short spur, slopes N.; descend 40 ft. over NW. slope.

21.20 Wash, 60 lks. wide, course N. 60° E.; thence, along S. slope.

23.80 Same wash, course SE.; thence, along N. slope.

30.80 Wash, 20 lks. wide, course NE.; ascend 10 ft. over SE. slope.

34.54 The original $\frac{1}{4}$ sec. cor. of secs. 4 and 33, which is a sandstone, 16x20x26 ins., set in a mound of stone, and marked $\frac{1}{4}$ on N. face. No accessories.

Reconstruct this cor. monument with altered reference as follows:

Remove the old cor. stone and in same place, set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in ground to bedrock with a stone 6x4x4 marked with a cross (+) deposited at base, with old stone reset alongside, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec., 33, with brass cap marked

 $\frac{1}{4}$ S33.

1939

No bearing trees available.

Thence, N. 89°33' W., on true line, continuing measurement of N. bdy. of sec. 4.

Ascend 40 ft. over SE. slope to

40.08 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in ground to bedrock over a cross (+) chiseled thereon, in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 4, with brass cap marked $\frac{1}{4}$ S4

1939

No bearing trees available.

Ascend 30 ft. over SE. slope.

44.80 Slope changes to S.; descend 46 ft. along S. slope.

56.20 Small gulch, course SE.; ascend 45 ft. over NE. slope.

61.30 Short spur, slopes SE.; descend 15 ft. along S. slope.

74.37 The original cor. of secs. 4, 5, 32, and 33, which is a malpais stone, 8x12x24 ins., set in a mound of stone, and marked 4 notches on E. and 2 notches on W. edges.

Reconstruct this cor. monument with altered reference as follows:

Resurvey: N. bdy. of T. 6 N., R. 1 W.

BOOK 4238

19.

Chains

Remove the old cor. stone and in same place, set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in ground to bedrock over a cross (+) chiseled thereon, with old stone reset alongside, and in a mound of stone to top, for cor. of secs. 32 and 33, with brass cap marked

T7N	RLW
S32	S33
T6N	REW

S4
1939

No bearing trees available.

Thence, N. 89°53' W., on true line, continuing measurement of N. bdy. of sec. 4.

Ascend slightly along S. slope.

- 80.16 Intersect the subdivisional line bet. secs. 4 and 5 surveyed N. 0°02' W.
Closing cor. of said secs. established at this point as hereinafter described.

Land, mountainous.

Soil, volcanic ash, rocky, 3rd and 4th rates.

Timber, mesquite, palo verde, ironwood, and catclaw.

Undergrowth, greasewood, palo verde, sage, and mesquite.

N. 89°53' W., on true line, on N. bdy. of sec. 5.

Over mountainous land, thru scattering timber and medium undergrowth.

Along S. slope.

- 8.00 Gulch, course S. 65° E.; thence, along N. slope.
- 11.20 Same gulch, course NE.; ascend 46 ft. along S. slope.
- 12.60 Unimproved road, bears NE. and SW.
- 27.90 Same gulch, course S. 60° E.; ascend 34 ft. over NE. slope.
- 32.21 Ridge, bears NW. and SE.
The $\frac{1}{4}$ sec. cor. of sec. 32, reestablished in 1919, which is an iron post, 1 in. in diam., set in a mound of stone $2\frac{1}{2}$ ft. base, to top of post, properly marked on brass cap, and witnessed by a mound of stone N.
- Thence, West, on true line, continuing measurement of N. bdy. of sec. 5.
- Descend 30 ft. over SW. slope.
- 38.00 Wash, 15 lks. wide, course SE.; ascend 28 ft. over NE. slope to
- 40.02 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in ground to bedrock over a cross (+) chiseled thereon, in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 5, with brass cap marked

TS5
1939

No bearing trees available.

Ascend 30 ft. over NE. slope.

Resurvey: N. bdy. of T. 6. N., R. 1 W.

.20

20.

Chains																			
43.40	Spur, slopes SE.; descend 35 ft. over SW. slope.																		
48.80	Drain, course SE.; ascend 25 ft. over E. slope.																		
51.00	Spur, slopes SE.; descend 55 ft. over SW. slope.																		
52.50	Wash, 10 lks. wide, course SE.; ascend 91 ft. over NE. slope.																		
59.50	Spur, slopes SE.; descend 53 ft. over SW. slope.																		
65.00	Gulch, course SE.; ascend 25 ft. over NE. slope.																		
68.20	Spur, slopes S.; descend 45 ft. over W. slope.																		
70.50	Wash, 20 lks. wide, course SW.; ascend 25 ft. over SE. slope.																		
72.28	The cor. of secs. 31 and 32, reestablished in 1919, which is an iron post, 2 ins. in diam., firmly set in a mound of stone, 2 ft. base, 1½ ft. high, and witnessed by a mound of stone N. This cor. monument retains its record reference, but marks are added to brass cap to read <table style="margin-left: auto; margin-right: auto;"> <tr> <td>T7N</td> <td> </td> <td>R1W</td> </tr> <tr> <td>S31</td> <td> </td> <td>S32</td> </tr> <tr> <td>T6N</td> <td> </td> <td>R1W</td> </tr> <tr> <td colspan="3" style="text-align: center;">S5</td> </tr> <tr> <td colspan="3" style="text-align: center;">1939</td> </tr> <tr> <td colspan="3" style="text-align: center;">1919</td> </tr> </table> West, on true line, continuing measurement of N. bdy. of sec. 6. Continue line and measurement. Ascend slightly over SE. slope.	T7N		R1W	S31		S32	T6N		R1W	S5			1939			1919		
T7N		R1W																	
S31		S32																	
T6N		R1W																	
S5																			
1939																			
1919																			
77.00	Low, flat spur, slopes S.; road on spur, bears N. and S.; descend slightly along S. slope.																		
80.04	Intersect the subdivisional line bet. secs. 5 and 6 surveyed N. 0°02' W. Closing cor. of said secs. established at this point as hereinafter described. Land, mountainous. Soil, volcanic ash, rocky, 3rd and 4th rates. Timber, mesquite, ironwood, palo verde, and catclaw. Undergrowth, mesquite, greasewood, palo verde, and cacti.																		
	West, on true line, on N. bdy. of sec. 6. Over mountainous land, thru scattering timber and medium undergrowth. Descend 45 ft. along S. slope.																		
6.40	Wash, 10 lks. wide, course S.; thence over point of flat spur, 15 ft. high, from NW.																		
10.90	Morgan City Wash, 2.00 chs. wide, course S. 30° E.; ascend 207 ft. over NE. slope.																		
31.50	Short spur, slopes SE.; descend 5 ft. over W. slope to																		
32.21	The ¼ sec. cor. of sec. 31, reestablished in 1919, which is an iron post, 1 in. in diam., firmly set in a mound of stone, 2½ ft. base, 2 ft. high, and properly marked on brass cap. Ties to M.S.No. 1809 A & B are given in the record of the 1919 resurvey. Continue line and measurement.																		

Resurvey: N. bdy. of T. 6 N., R. 1 W.


BOOK 4233

21.

Chains	
	Descend 51 ft. over W. slope.
34.90	Gulch, course SE.; ascend 45 ft. over E. slope.
38.20	Spur, slopes S. 20° E.; descend 25 ft. over SW. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in
	ground to bedrock over a cross (+) chiseled thereon, in
	a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 6, with
	brass cap marked.
	$\frac{136}{1939}$
	No bearing trees available.
	Descend 35 ft. over SW. slope.
41.00	Gulch, course SE.; ascend 60 ft. over NE. slope.
49.00	Spur, slopes SE.; descend 80 ft. over W. slope.
53.70	Gulch, course SE.; ascend 42 ft. over broken SE. slope to
72.22	The SW. cor. of T. 7 N., R. 1 W., reestablished in 1919-24,
	which is an iron post, 3 ins. in diam., firmly set in a
	mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, properly marked
	on brass cap, and witnessed by a mound of stone NE. of
	post.
	Thence, North, on true line, on W. bdy. of sec. 31.
4.55	The SE. cor. of T. 7 N., R. 2 W., reestablished in 1919-24,
	which is an iron post, 3 ins. in diam., projecting 10
	ins. above ground, firmly set, properly marked on brass
	cap, and witnessed by a mound of stone NW. of post.
	Thence, West, on true line, on S. bdy. of sec. 36, T. 7 N.,
	R. 2 W.
7.56	(79.78 chs. investing from closing cor. of secs. 5 and 6, T. 6 N.,
	R. 1 W.) The cor. of T. 6 N., R. 1 and 2 W., establish-
	ed in 1924, which is an iron post, 3 ins. in diam.,
	firmly set in mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high,
	and properly marked on brass cap.
	Land, mountainous.
	Soil, volcanic ash, rocky, 3rd and 4th rates.
	Timber, palo verde, ironwood, mesquite, and catclaw.
	Undergrowth, greasewood, paloverde, cacti, and ocotillo.
	Survey: Subdivision lines of T. 6 N., R. 1 W.
	Commence the survey of the subdivision of T. 6 N., R. 1 W.
	at the cor. of secs. 1, 2, 35, and 36, on S. bdy. of
	the Tp., which is an iron post, 2 ins. in diam., pro-
	jecting 18 ins. above ground, firmly set in a mound of
	stone, properly marked on brass cap, and witnessed by a
	mound of stone W.
	Thence
	North, on a sectional guide meridian, bet. secs. 35 and
	36.
	Over mountainous land, thru scattering timber and under-
	growth.
	Ascend 25 ft. over SE. slope.

Survey: Subdivisional lines: T. 6 N., R. 1 W.

Chains
8.50 Ridge, bears NW. and SE.; descend 102 ft. over NE. slope.
23.20 Draw, near head, course SE.; ascend 86 ft. over SW. slope.
25.50 Spur, slopes NE.; thence along broken W. slope.
38.20 Top of rocky bluff; bears N. 25° E. and W.; descend 19 ft. over NW. slope to
39.00 Set an iron post, 3 ft. long, 1 in in diam., 18 ins. in ground to bedrock with a stone 3x5x7 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for witness cor. to 1/4 sec. cor., with brass cap marked



No bearing trees available.

Descend 35 ft. over precipitious NW. slope to
40.00 True point for 1/4 sec. cor. falls on cliff, where it is impracticable to monument the cor., therefore establish witness cor., South, 1.00 ch. dist.

Descend 45 ft. over precipitious NW. slope.

42.40 Rocky wash, 40 lks. wide, course NE.; ascend 109 ft. over broken SW. slope.


60.00 Short spur, slopes SE.; descend 40 ft. over NE. slope.

62.80 Head of draw, course SE.; ascend 138 ft. over SW. slope.

74.20 Ridge, bears NW. and SE.; thence, along E. slope.

78.60 Short spur, slopes N. 60° E.; descend 20 ft. over N. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 6 ins. in ground to bedrock with a stone 3x5x6 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 25, 26, 35, and 36, with brass cap marked



No bearing trees available.

Land, mountainous.
Soil, volcanic ash, rocky, 3rd and 4th rates.
Timber, Palo verde, ironwood, and mesquite.
Undergrowth, greasewood, sage, paloverde, cacti, and ocotillo.

S. 89°53' E., on random line, bet. secs. 25 and 36.

40.00 Set temp 1/4 sec. cor.

81.07 A point, 12 lks. S. of the reestablished cor. of secs. 25 and 36, on the E. bdy. of the Tp. (G. & S. R. Mer.), hereinbefore described.

Survey: Subdivisional lines: T. 6 N., R. 1 W.

BOOK 4233

23.

Chains

Thence

N. 89°58' W., on true line, bet. secs. 25 and 36.

Over mountainous land, thru scattering timber and undergrowth.

Descend 87 ft. over SW. slope.

11.00 Wash, 10 lks. wide, course SE.; ascend 86 ft. over NE. slope.

19.10 Spur, slopes SE.; descend 54 ft. over SW. slope.

30.20 Gulch, course SE.; thence, ascending gradually.

32.70 Same gulch, course NE.

34.10 Same gulch, course SE.; ascend 43 ft. over N. slope to

41.07 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground to bedrock with a stone 6x4x4 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ $\frac{S\ 25}{S\ 36}$
1939

No bearing trees available.

Continue along N. slope.

42.10 Small drain, course N. 60° E.; ascend 92 ft. over NE. slope.

52.60 Spur, slopes SE.; descend 100 ft. over W. slope.

62.40 Draw, course S.; thence, along S. slope.

65.10 Enter wash, 60 lks. wide, course SE. from W.

67.90 Leave wash, course E. from NW.; ascend 20 ft. along N. slope.

74.40 Head of drain; course NE.; ascend 102 ft. over E. slope.

79.20 Short spur, slopes NE.; thence, along N. slope to

81.07 The cor. of secs. 25, 26, 35, and 36.

Land, mountainous.

Soil, volcanic ash, rocky, 3rd. and 4th rates.

Timber, palo verde, mesquite, catclaw, and ironwood.

Undergrowth, greasewood, sage, paloverde, cacti, and ocotillo.

North, on a sectional guide meridian, bet. secs. 25 and 26.

Over mountainous land, thru scattering timber and undergrowth.

Descend 117 ft. over N. slope.

11.50 Wash, 25 lks. wide, course SE.; thence, along broken E. slope.

33.50 Wash, 20 lks. wide, course S. 25° E.; ascend 30 ft. over SW. slope.

Survey: Subdivisional lines: T. 6 N., R. 1 W.

.24

24.

Chains	
39.50	Toe of spur, slopes W.; thence, along W. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\begin{array}{c} \frac{1}{4} \\ \text{S26} \quad \quad \text{S25} \\ \hline 1939 \end{array}$
	No bearing trees available.
	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
	Continue along broken W. slope.
45.00	Rocky gulch, course SW.; ascend 30 ft. over SE. slope.
50.55	Toe of spur, slopes E.; descend 15 ft. along E. slope.
53.20	Gulch, course SE.; ascend 140 ft. over SW. slope to
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in ground, for cor. of secs. 23, 24, 25, and 26, with brass cap marked
	$\begin{array}{cc} \text{T6N} & \text{R1W} \\ \text{S23} & \quad \text{S24} \\ \hline \text{S26} & \quad \text{S25} \\ \hline 1939 \end{array}$
	No bearing trees available.
	Raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.
	Land, mountainous.
	Soil, volcanic ash, rocky, 3rd and 4th rates.
	Timber, palo verde, catclaw, ironwood, and mesquite.
	Undergrowth, greasewood, sage, palo verde, cacti, mesquite, and ocetillo.
	S. 89°58' E., on random line, bet. secs. 24 and 25.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
81.91	A point, 2 lks. N. of the reestablished cor. of secs. 24 and 25, on E. bdy. of Tp. (G. & S. R. Mer.), hereinbefore described.
	Thence
	N. 89°57' W., on true line, bet. secs. 24 and 25.
	Over mountainous land, thru scattering timber and undergrowth.
	Ascend 14 ft. over NE. slope.
2.50	Ridge, bears NW. and SE.; descend 40 ft. over SW. slope.
9.00	Draw, course SE.; ascend 98 ft. over E. slope.
19.10	Ridge, bears N. and S.; descend 136 ft. over NW. slope.
29.70	Rocky gulch, course S.; ascend 77 ft. over SE. slope.

Survey: Subdivisional lines: T. 6 N., R. 1 W.

BOOK 4233

Chains

- 35.00 Short spur, slopes NE.; thence, along N. slope.
- 38.20 Spur, slopes SE.; descend 30 ft. over broken SW. slope to
- 41.91 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for 1/4 sec. cor. with brass cap marked

$\frac{1}{4}$ $\frac{S\ 24}{S\ 25}$
 1939

No bearing trees available.

Descend 80 ft. over SW. slope.

- 58.40 Wash, 10 lks. wide, course SE.; ascend 115 ft. over NE. slope.

- 80.40 Ridge, bears NW. and SE.; descend slightly over SW. slope.

- 81.91 The cor. of secs. 23, 24, 25, and 26.

Land, mountainous.
 Soil, volcanic ash, rocky, 3rd and 4th rates.
 Timber, palo verde, mesquite, catclaw, and ironwood.
 Undergrowth, greasewood, sage, palo verde, ocotillo, and cacti.

North, on a sectional guide meridian, bet. secs. 23 and 24.

Over mountainous land, thru scattering timber and undergrowth.

Ascend 10 ft. over SW. slope.

- 1.80 Ridge, bears NW. and SE.; descend 100 ft. over NE. slope.
- 16.50 Small gulch, course N. 60° E.; descend 115 ft. over NE. slope.
- 25.10 Gulch, course N. 35° W.; descend 20 ft. over NW. slope.
- 31.20 Wash, 20 lks. wide, course NE.; descend slightly over NE. slope.
- 33.15 Right bank of Morgan City Wash, bears NE. and NW.
- 33.15 Thence across said wash, course NE. from NW.
Road in bed of wash.
- 38.80 Left bank of said wash, bears NE. and NW. Leave wash and enter level land.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, for 1/4 sec. cor., with brass cap marked

$\frac{1}{4}$
 S23 | S24
 1939

from which

A mesquite, 7 ins. diam., bears S. 35° E., 58 lks. dist., marked 1/4 S24 BT.

A mesquite, 12 ins. diam., bears N. 88 1/2° W., 124 lks. dist., marked 1/4 S23 BT.

NE. cor. of a goat shed, size 25 X 50 ft., bears S 87 1/2° W., 7.34 chs. dist.

Continue over level land.

Chains
 45.20 Leave level land; enter mountainous land, the foot of which bears E. and W.
 49.20 Wash, 40 lks. wide, course SE.; ascend 74 ft. over SW. slope.
 59.00 Spur, slopes SE.; descend 25 ft. over NE. slope.
 63.00 Head of draw, course E.; ascend 25 ft. over SE. slope.
 68.10 Short spur, slopes E.; descend 20 ft. over NE. slope.
 70.10 Drain, course E.; ascend 98 ft. over SE. slope.
 76.00 Short spur, slopes E.; descend 46 ft. over NE. slope to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for cor. of secs. 13, 14, 23, and 24, with brass cap marked

T6N	R1W
S14	S13
S23	S24

1939

No bearing trees available.

Land, mountainous and level.
 Soil, volcanic ash and sandy loam; 2nd to 4th rate.
 Timber, mesquite, catclaw, palo verde, and ironwood.
 Undergrowth, sage, greasewood, palo verde, cacti, and ocotillo.

S. 89°57' E., on random line, bet. secs. 13 and 24.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

82.98 A point, 9 lks. N. of the reestablished cor. of secs. 13 and 24, on E. bdy. of Tp. (G. & S. R. Mer.), hereinbefore described.

Thence

N. 89°53' W., on true line, bet. secs. 13 and 24.

Over mountainous land, thru scattering timber and undergrowth.

Descend 105 ft. over SW. slope.

9.90 Gulch, course S. 30° W.; ascend 102 ft. over SE. slope.

13.50 Short spur, slopes S.; descend 90 ft. over W. slope.

16.90 Top of white tufa cliff, 50 ft. high, bears N. and S.; descend 70 ft. over W. slope.

18.00 Bottom of narrow canyon, course S.; a small spring, bears N., 20 chs. dist.; ascend 296 ft. over SE. slope.

27.80 Spur, slopes S. 20° E.; descend 140 ft. over SW. slope.

36.50 Gulch, course S. 30° E.; ascend 144 ft. over E. slope.

42.50 Spur, slopes SE.; descend slightly over SW. slope to

42.98 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in ground to bedrock over a cross (+) chiseled thereon,

Survey: Subdivisional lines: T. 6 N., R. 1 W.

E. 20 N. 4233

27.

Chains	and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S 13}{S 24}$ 1939
	No bearing trees available.
	Descend 126 ft. over SW. slope.
50.30	Gulch, course S. 30° E.; ascend 75 ft. over E. slope.
54.20	Spur, slopes SE.; ascend 45 ft. along S. slope.
60.00	Spur, slopes S. 30° E.; descend 162 ft. over SW. slope.
61.50	Peak on spur, 160 ft. high, bears N., 4.50 chs. dist.
77.10	Wash, 20 lks. wide, course SE.; ascend 100 ft. over NE. slope to
82.98	The cor. of secs. 13, 14, 23, and 24.
	Land, mountainous. Soil, volcanic ash, rocky, 3rd and 4th rates. Timber, palo verde and ironwood. Undergrowth, palo verde, greasewood, cacti, ocotillo, and mesquite.
	North, on a sectional guide meridian, bet. secs. 13 and 14.
	Over mountainous land, thru scattering timber and under- growth.
	Descend 69 ft. over NE. slope.
12.00	Rocky wash, 30 lks. wide, course SE.; ascend 23 ft. along broken W. slope.
24.40	Gulch, course SW.; ascend 50 ft. over SW. slope.
30.80	Dim road, bears NE. and SW.
32.50	Gulch, course S. 30° W.; ascend 79 ft. over S. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap marked
	$\frac{1}{4}$ $S14 \quad \quad S13$ 1939
	No bearing trees available.
	Ascend 102 ft. over S. slope.
48.40	Ridge, bears NW. and S. 60° E.; descend 137 ft. over NE. slope.
72.30	Rocky wash, 40 lks. wide, course SE.; ascend 44 ft. over SW. slope to sec. cor.
73.90	Old road, bears NW. and SE.

Survey: Subdivisional lines: T. 6 N., R. 1 W.

28

28.

Chains

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in ground, for cor. of secs. 11, 12, 13, and 14, with brass cap marked

T6N	R1W
S11	S12
S14	S13

1939

No bearing trees available

Raise a mound of stone, $3\frac{1}{2}$ ft. base, 3 ft. high, W. of cor.

Land, mountainous.

Soil, volcanic ash, rocky, 3rd and 4th rates.

Timber, palo verde, ironwood, and mesquite.

Undergrowth, sage, greasewood, palo verde, cacti, and ocotillo.

S. $89^{\circ}53'$ E., on random line, bet. secs. 12 and 13.40.00 Set temp. $\frac{1}{4}$ sec. cor.

84.24 Intersect the ^{true point for} reestablished cor. of secs. 12 and 13, on E. bdy. of Tp. (G. & S. R. Mer.), hereinbefore described.

Thence

N. $89^{\circ}53'$ W., on true line, bet. secs. 12 and 13.

Over mountainous land, thru scattering timber and undergrowth.

0.20 Rocky wash, 20 lks. wide, course S: 60° E.
Ascend 157 ft. over NE. slope.

8.80 Point of spur, slopes N.; descend 95 ft. over NW. slope.

13.70 Enter gulch, course NE. from W.; thence, along bottom of gulch.

20.00 Leave gulch, course E. from NW.; ascend 420 ft. over NE. slope to

44.24 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S 12
	S 13

1939

No bearing trees available.

Ascend 120 ft. over NE. slope.

52.20 Ridge, NW. and SE.; descend 308 ft. over SW. slope to

84.24 The cor. of secs. 11, 12, 13, and 14.

Land, mountainous.

Soil, volcanic ash, rocky, 3rd and 4th rate.

Timber, palo verde, ironwood, and mesquite.

Undergrowth, greasewood, sage, palo verde, cacti, and ocotillo.

Survey: Subdivisional lines: T. 6 N., R. 1 W.

BOOK 4286

29.

Chains

North, on a sectional guide meridian, bet. secs. 11 and 12.

Over mountainous land, thru scattering timber and undergrowth.

Ascend 95 ft. over SW. slope.

18.60 Short spur, slopes W.; descend 40 ft. along W. slope.

28.70 Gulch, course SW.; ascend 120 ft. over broken S. slope.

37.70 Spur, slopes SW.; thence, along W. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in ground with a stone 3x4x6 ins. marked with a cross (+) deposited at base, and in a mound of stone to top; for $\frac{1}{4}$ sec. cor., with brass cap marked

	1 4	
S11		S12

1939

No bearing trees available.

This cor. is on a ridge, bears NW. and SE.
Descend 215 ft. over NE. slope.

50.30 Gulch, course NE.; thence, along E. slope.

54.90 Gulch, course SE.; ascend 83 ft. over SW. slope.

62.00 Spur, slopes S. 70° E.; descend 63 ft. over N. slope.

66.40 Gulch, course S. 65° E.; ascend 44 ft. over SW. slope.

67.50 Long spur, slopes E.; descend 117 ft. over N. slope.

79.40 Gulch, course NE.; ascend 7 ft. over SE. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in ground to bedrock with a stone 3x3x6 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 1, 2, 11, and 12, with brass cap marked

T6N		R1W
S 2		S 1
S11		S12

1939

No bearing trees available.

Land, mountainous.

Soil, volcanic ash, rocky, 3rd and 4th rates.

Timber, palo verde, ironwood, and mesquite.

Undergrowth, greasewood, sage, palo verde, cacti, and ocotillo.

S. 89°53' E., on random line, bet secs. 1 and 12.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

82.60 Intersect the reestablished cor. of secs. 1 and 12, on E. bdy. of Tp. (G. & S. R. Mer.), hereinbefore described.

Thence

N. 89°53' W., on true line, bet. secs. 1 and 12.

Survey: Subdivisional lines: T. 6 N., R. 1 W.

Chains

Over mountainous land, thru scattering timber and undergrowth.

Ascend 76 ft. over E. slope.

6.10 Short spur, slopes S. 75° E.; descend 53 ft. over W. slope.

10.90 Wash, 40 lks. wide, course SE.; ascend 128 ft. over NE. slope.

22.60 Short spur, slopes N.; thence along N. slope.

33.40 Gulch, course N.; ascend 97 ft. over NE. slope.

38.60 Short spur, slopes N.; descend 16 ft. over NW. slope.

42.60 Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for 1/4 sec. cor., with brass cap marked

1/4 S 1 / S 12

1939

No bearing trees available.

Descend 81 ft. over NW. slope.

48.10 Wash, 25 lks. wide, course N.; thence along broken N slope.

54.10 Gulch, course N.; continue along broken N. slope.

61.40 Short gulch, course N.; ascend 178 ft. over NE. slope.

73.80 Spur, slopes N.; descend 92 ft. over NW. slope.

82.00 Gulch, course NE.; ascend 12 ft. over SE. slope.

82.60 The cor. of secs. 1, 2, 11, and 12.

Land, mountainous.

Soil, volcanic ash, rocky, 3rd and 4th rates.

Timber, palo verde, ironwood, catclaw, and mesquite.

Undergrowth, palo verde, greasewood, sage, cacti, and ocotillo.

North, on a sectional guide meridian, bet. secs. 1 and 2.

Over mountainous land, thru scattering timber and medium undergrowth.

Ascend 40 ft. over SE. slope.

6.20 Short spur, slopes N. 60° E.; descend 124 ft. over NE. slope.

15.70 Wash, 10 lks. wide, course E.; thence, along E. slope.

18.20 Wash, 50 lks. wide, course SE.; thence, along W. slope.

25.20 Gulch, course SW.; ascend 78 ft. over SW. slope.

38.40 Short spur, slopes SW.; descend slightly over NW. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in ground to bedrock over a cross (+) chiseled thereon, in a mound of stone to top, for 1/4 sec. cor., with brass cap marked.

Survey: Subdivisional lines: T. 6 N., R. 1 W.

BOOK 4288

31.

Chains

$$\begin{array}{c} \frac{1}{4} \\ | \\ S2 \quad | \quad S1 \end{array}$$

1939

No bearing trees available.

Descend 15 ft. over NW. slope.

41.40 Gully, course S. 60° W.; ascend 114 ft. over broken SW. slope.

57.00 Short spur, slopes W.; descend 115 ft. over NW. slope.

67.60 Gully, course N. 60° W.; thence along broken W. slope to

75.89 Intersect N. bdy. of Tp. at a point 4.00 chs., N. 89°54' W. from cor. of secs. 35 and 36, T. 7 N., R. 1 W., hereinbefore described.

At point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in ground, for closing cor. of secs. 1 and 2, with brass cap marked

$$\begin{array}{c} T7N \quad RLW \\ \hline S35 \\ \hline S2 \quad | \quad S1 \\ T6N \quad | \quad RLW \\ \hline O \quad C \end{array}$$

1939

No bearing trees available.

Raise a mound of stone, 3 ft. base, 2½ ft. high, S. of cor.

Land, mountainous.

Soil, volcanic ash, rocky, 3rd and 4th rates.

Timber, palo verde, ironwood, and mesquite.

Undergrowth, greasewood, palo verde, sage, cacti, and ocotillo.

The cor. of secs. 34, 35, and 36, on S. bdy. of the Tp., is an iron post, 2 ins. in diam., set on bedrock in a mound of stone, and properly marked on brass cap. No accessories.

Thence

N. 0°01' W., bet. secs. 34 and 35.

Over mountainous land, thru scattering timber and undergrowth.

Descend 45 ft. along broken W. slope.

7.20 Head of draw, course S. 30° W.; ascend 30 ft. over SW. slope.

11.50 Spur, slopes S. 30° E.; thence along E. and NE slopes.

29.00 Draw, course E.; ascend 50 ft. over S. slope.

34.80 Ridge, bears E. and W.; thence along broken E. slope to

40.00 Point of short spur, slopes E.
Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, for ¼ sec. cor., with brass cap marked

Chains							
	$\frac{1}{4}$ S34 S35 1939						
	No bearing trees available.						
	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.						
	Descend 82 ft. over NE. slope.						
42.00	Top of rocky butte, bears E., about 25 chs. dist.						
45.40	Old unimproved road, bears N. 25° W. and S. 25° E.						
49.30	Rocky gulch, course NW.; thence, along W. slope.						
56.00	Same gulch, course NE.; thence, along broken E. slope.						
57.00	Wash, 25 lks. wide, course N. 70° E.; continue along broken E. slope.						
74.10	Wash, 50 lks. wide, course SE.; ascend 45 ft. over SW. slope to						
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in ground, for cor. of secs. 26, 27, 34, and 35, with brass cap marked						
	<table border="1" style="margin: auto;"> <tr> <td>T6N</td> <td>R1W</td> </tr> <tr> <td>S27</td> <td>S26</td> </tr> <tr> <td>S34</td> <td>S35</td> </tr> </table> 1939	T6N	R1W	S27	S26	S34	S35
T6N	R1W						
S27	S26						
S34	S35						
	No bearing trees available:						
	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.						
	Land, mountainous.						
	Soil, volcanic ash, rocky, 3rd and 4th rates.						
	Timber; palo verde, ironwood, catclaw, and mesquite.						
	Undergrowth; palo verde, greasewood, ocotillo, cacti, sage, and catclaw.						
	S. 89°53' E., on random line, bet. secs. 26 and 35.						
40.00	Set. temp. $\frac{1}{4}$ sec. cor.						
80.04	Intersect N. and S. line 9 lks. N. of the cor. of secs. 25, 26, 35, and 36.						
	Thence						
	N. 89°49' W., on true line, bet. secs. 26 and 35.						
	Over mountainous land, thru scattering timber and medium undergrowth.						
	Along broken N. slope, ascend 30 ft.						
16.30	Ridge, bears N. 75° W. and S. 75° E.; ascend 53 ft. along broken S. slope.						
27.00	Head of draw, course SE.; Ascend 140 ft. over E. slope.						

Chains

34.50 A point on ridge, bearing NE. and NW., from which, a spur slopes SE.; ascend 30 ft. over top of rocky hill.

40.02 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4} \begin{array}{l} S 26 \\ S 35 \end{array}$$

1939

No bearing trees available.

Continue over top of hill; ascend 20 ft.

44.00 Point on ridge, bearing NE. and NW.; descend 176 ft. over SW. slope.

51.50 Head of draw, course S.; ascend 80 ft. over SE. slope.

54.00 Short spur, slopes S.; descend 49 ft. along broken S. slope.

60.50 Spur, slopes S.; descend 211 ft. over broken SW. slope to

80.04 The cor. of secs. 26, 27, 34, and 35.

Land, mountainous.

Soil, volcanic ash, rocky, 3rd and 4th rates.

Timber, palo verde, ironwood, catclaw, and mesquite.

Undergrowth, palo verde, mesquite, sage, cacti, grease wood, and ocotillo.

N. 0°01' W., bet. secs. 26 and 27.

Over mountainous land, thru scattering timber and medium undergrowth.

Ascend 55 ft. over SW. slope.

7.00 Point of spur, from NE.; thence, along W. slope.

18.50 Short spur, slopes W.; descend 25 ft. over NW. slope.

22.10 Gulch, course S. 60° W.; ascend 140 ft. over SW. slope.

31.90 Ridge, bears N. 60° W. and E.; top of a rocky butte, 200 ft. above this point, bears N. 73 $\frac{1}{4}$ ° E., 25 chs. dist.; descend 142 ft. over NW. slope to $\frac{1}{4}$ sec. cor.

36.50 Low saddle in ridge bearing NW. and SE., bears W., 5 chs. dist.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4} \begin{array}{l} S 27 \\ S 26 \end{array}$$

1939

No bearing trees available.

Descend 15 ft. over NW. slope.

Survey: Subdivisional lines: T. 6 N., R. 1 W.

.34

34.

Chains	
42.40	Small gulch; course N.30° E.; descend 14 ft. over NE. slope.
50.50	Wash, 40 lks. wide, course S. 70° E.; Thence, along E. slope.
59.80	Small gulch, course SE.; ascend 38 ft. over broken S. slope.
65.20	Road, bears E. and W.
65.70	Toe of spur, from W.; descend 30 ft. over NE. slope.
74.00	Gulch, course SE.; thence, along broken E. slope.
77.10	Gulch, course SE.; ascend 30 ft. over broken SW. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in ground, for cor. of secs. 22, 23, 26, and 27, with brass cap marked

T6N	RLW
S22	S23
S27	S26

1939

No bearing trees available.

Raise a mound of stone 4 ft. base, 3 ft. high, W. of cor.

Land, mountainous.

Soil, volcanic ash, rocky, 3rd and 4th rates.

Timber, palo verde, ironwood, and mesquite.

Undergrowth, greasewood, sage, palo verde, cacti, and ocotillo.

S. 89°49' E., on random line, bet. secs. 23 and 26.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.04 Intersect N. and S. line, 11 lks. S. of the cor. of secs. 23, 24, 25, and 26.

Thence

N. 89°54' W., on true line, bet. secs. 23 and 26.

Over mountainous land, thru scattering timber and medium undergrowth.

Descend 71 ft. over SW. slope.

11.10 Gulch, course SW.; thence along S. slope.

13.00 Gulch, course SE.; ascend 45 ft. over E. slope.

16.50 Spur, slopes S.; descend 70 ft. over SW. slope.

31.50 Gulch, course S. 20° E.; thence along N. slope.

31.90 Dim road, bears N. and S.

36.00 Drain, course N. 75° E.; thence, along S. slope.

40.02 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, for $\frac{1}{4}$ sec. cor. with brass cap marked

Survey; Subdivisional lines: T. 6 N., R. 1 W.

BOOK 4283

35.

Chains

$$\frac{1}{4} \frac{S\ 23}{S\ 26}$$

1939

No bearing trees available.

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Continue along S. slope.

- 52.00 Unimproved road, bears NE. and SW.
 53.20 Wash, 20 lks. wide, course SE.; ascend 110 ft. over SE. slope.
 62.50 Spur, slopes S. 20° E.; descend 52 ft. over SW. slope.
 68.20 Gulch, course SE.; ascend 83 ft. over SE. slope.
 76.80 Spur, slopes SE.; descend 37 ft. over SW. slope to
 80.04 The cor. of secs. 22, 23, 26, and 27.

Land, mountainous.
 Soil, volcanic ash, rocky, 3rd and 4th rates.
 Timber, palo verde, ironwood, and mesquite.
 Undergrowth, greasewood, palo verde, cacti, sage, and ocatillo.

N. 0°01' W., bet. secs. 22 and 23.

Over mountainous land, thru scattering timber and medium undergrowth.

Ascend 15 ft. over SW. slope.

- 6.70 Head of draw, course S. 30° W.; ascend 58 ft. over S. slope.
 10.40 Ridge, bears NW. and SE.; descend 65 ft. over NE. slope.
 15.50 Gulch, course S. 60° E.; ascend 57 ft. over S. slope.
 20.20 Spur; slopes S. 60° E.; descend 92 ft. over N. slope.
 28.00 Wash, 20 lks. wide, course S. 60° E.; ascend 60 ft. over SW. slope.
 40.00 Ridge, bears E. and W.
 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$$S22 \left| S23 \right.$$


1939

No bearing trees available.

Raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.

- 42.00 Descend 40 ft. over N. slope.
 42.00 Gulch, course NE.; ascend 56 ft. over SE. slope.

Chains
42.60 Dim road, bears NE. and SW.
50.80 Short spur, slopes E.; descend 70 ft. over NE. slope.
54.60 Gulch, course E.; ascend 50 ft. over SE. slope.
60.20 Spur, slopes E.; descend 100 ft. over broken NE. slope.
74.20 Morgan City Wash, 1.50' chs. wide, course S. 60° E.; road in wash, bears N. 60° W. and S. 60° E.; ascend 35 ft. over S. slope.
78.25 Short spur, slopes E.; from this point NE. cor. of unoccupied frame house, 20x20 ft., bears S. 20°05' W., 1.29 chs. dist. NW. cor. of shed, 8x24 ft., bears S. 42°45' E., 2.35 chs. dist.
Descend 30 ft. over N. slope.
79.60 Gulch, course SE.; ascend 10 ft. over NW. slope to
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for cor. of secs. 14, 15, 22, and 23, with brass cap marked



1939

No bearing trees available.

Land, mountainous.
Soil, volcanic ash, rocky, 3rd and 4th rates.
Timber, palo verde, mesquite, ironwood, and catclaw.
Undergrowth, palo verde, greasewood, mesquite, cacti, sage, and ocotillo.


S. 89°54' E., on random line, bet. secs. 14 and 23.
40.00 Set temp. 1/4 sec. cor.
80.04 Intersect N. and S. line, 4 lks. S. of cor. of secs. 13, 14, 23, and 24.
Thence
N. 89°56' W., on true line, bet. secs. 14 and 23.
Over mountainous land, thru scattering timber and medium undergrowth.
Ascend 124 ft. over NE. slope.
9.90 Spur, slopes SE.; descend 140 ft. over SW. slope.
26.20 Old, unimproved road, bears N. and S.
32.70 Wash, 60 lks. wide, course SE.; thence, along broken SE. slope.
37.40 Gulch, course SE.
38.70 Same gulch, course NE. Thence along broken S. slope.
40.02 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in ground to bedrock over a cross (+) chiseled thereon,

Survey: Subdivisional lines: T. 6 N., R. 1 W.

1939 4250

Chains

and in a mound of stone to top, for 1/4 sec. cor., with brass cap marked



1939

No bearing trees available.

Continue along broken S. slope.

- 45.20 Gulch, course S. 60° E.; thence, along N. slope.
- 53.70 Same gulch, course N. 70° E.; thence along S. slope.
- 54.90 Same gulch, course SE.; ascend 30 ft. over NE. slope.
- 60.80 Spur, slopes S. 60° E.; thence, along broken S. slope.
- 72.50 Short spur, slopes S.; descend 55 ft. over SW. slope.
- 75.40 Wash, 10 lks. wide, course SE.; ascend 40 ft. over E. slope.
- 77.10 Toe of spur, from NW.; descend 10 ft. over SW. slope to
- 80.04 The cor. of secs. 14, 15, 22, and 23.


Land, mountainous.
 Soil, volcanic ash, rocky, 3rd and 4th rates.
 Timber, palo verde, ironwood, mesquite, and catclaw.
 Undergrowth, palo verde, greasewood, sage, cacti, and ocotillo.

N. 0°01' W., bet. secs. 14 and 15.

Over mountainous land, thru scattering timber and medium undergrowth.

Ascend 12 ft. over SW. slope.

- 1.60 Short spur, slopes SE.; thence, along E. slope.
- 11.00 Wash, 10 lks. wide, course S. 30° E.; ascend 245 ft. over S. slope.
- 32.70 Ridge, bears NW. and SE.; descend 52 ft. along E. slope.
- 39.30 Spur, slopes N. 60° E.; descend slightly over NW. slope to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for 1/4 sec. cor., with brass cap marked



1939

No bearing trees available.

Descend 97 ft. over NW. slope.

- 45.90 Gulch, course N. 60° E.; ascend 92 ft. over S. slope.
- 49.50 Short, sharp spur, slopes SE.; descend 136 ft. over NE. slope.

Survey: Subdivisional lines: T. 6 N., R. 1 W.

Chains

- 56.60 Gulch, course E.; ascend 164 ft. over S. and SW. slopes.
- 79.00 Small gully, course S. 30° W.; ascend 20 ft. over S. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in ground, for cor. of secs. 10, 11, 14, and 15, with brass cap marked

T6N	RLW
S10	S11
S15	S14

1939

from which

- An ironwood, 14 ins. in diam., bears N. 26 $\frac{3}{4}$ ° E.; 174 lks. dist., marked T6N RLW S11 BT.
- An ironwood, 7 ins. in diam., bears S. 3 $\frac{3}{4}$ ° W., 33 lks. dist., marked T6N RLW S15 BT.
- An ironwood, 5 ins. in diam., bears N. 4 $\frac{1}{2}$ ° W., 113 lks. dist., marked T6N RLW S10 BT.
- Raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.

Land, mountainous.
 Soil; volcanic ash, rocky, 3rd and 4th rates.
 Timber, ironwood, palo verde, mesquite, and catclaw.
 Undergrowth, greasewood, palo verde, sage, cacti, and ocotillo.

S. 89°56' E., on random line, bet. secs. 11 and 14.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.04 Intersect N. and S. line, 13 lks. S. of the cor. of secs. 11, 12, 13, and 14.

Thence

S. 89°58' W.; on true line, bet. secs. 11 and 14.

Over mountainous land, thru scattering timber and medium undergrowth.

Descend 40 ft. over SW. slope.

- 2.90 Wash; 25 lks. wide, course SE.; ascend 103 ft. along S. slope.
- 3.80 Old, unimproved road, bears NW. and SE.
- 25.30 Enter bed of dry wash, course S. 75° E. from W.; ascend 20 ft. along bed of wash.
- 30.10 Leave bed of wash, course E. from S. 60° W.; thence, along broken S. slope.
- 35.80 Small gulch, course SE.; ascend 45 ft. over SE. slope to
- 40.02 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

Survey: Subdivisional lines: T. 6 N., R. 1 W.

BOOK 4205

39.

Chains

$\frac{1}{4}$ $\frac{S 11}{S 14}$

1939

No bearing trees available.

Ascend 337 ft. over SE. slope.

- 57.00 Ridge, bears NW. and SE.; descend 102 ft. over SW. slope.
 61.80 Deep ravine, course S.; ascend 50 ft. over SE. slope.
 64.40 Spur, slopes S.; descend 19 ft. over broken SW. slope.
 65.60 Top of cliff, 50 ft. high, bears N. and S.; descend 140 ft. over precipitious SW. slope.
 71.90 Gully, course S.; ascend 45 ft. over SE. slope.
 75.00 Short spur, slopes S.; descend 78 ft. over SW. slope.
 79.60 Gully, course S. 30° W.; thence, along S. slope to
 80.04 The cor. of secs. 10, 11, 14, and 15.

Land, mountainous.

Soil, volcanic ash, rocky, 3rd and 4th rates.

Timber, ironwood, palo verde, mesquite, and catclaw.

Undergrowth, palo verde, greasewood, sage, cacti, and ocatillo.

N. 0°01' W., bet. secs. 10 and 11.

Over mountainous land, thru scattering timber and medium undergrowth.

Ascend 564 ft. over S. slope.

- 22.80 Ridge, bears E. and W.; descend 637 ft. over N. slope.
 39.00 Head of drain, course NE.; descend slightly over NE. slope to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
 S10 | S11

1939

No bearing trees available.

Raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.

Descend 190 ft. over NE. slope.

- 57.00 Short spur, slopes NE.; descend 140 ft. over NW. slope.
 64.40 Gulch, course NE.; ascend 15 ft. over SE. slope.
 65.10 Toe of spur, slopes NE.; descend 25 ft. over N. slope.
 66.70 Wash, 25 lks. wide, course E.; ascend 170 ft. over SW. slope to

Survey: Subdivisional lines: T. 6 N., R. 1 W.

40

40.

Chains 80.00	<p>Spur, slopes SE. Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for cor. of secs. 2, 3, 10, and 11, with brass cap marked</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>T6N</td> <td>RLW</td> </tr> <tr> <td>S 3</td> <td>S 2</td> </tr> <tr> <td>S10</td> <td>S11</td> </tr> </table> <p style="text-align: center;">1939</p> <p>No bearing trees available.</p> <p>Land, mountainous. Soil, volcanic ash, rocky, 3rd and 4th rates. Timber, palo verde, ironwood, and mesquite. Undergrowth, greasewood, paloverde, sage, cacti, and ocotillo.</p>	T6N	RLW	S 3	S 2	S10	S11
T6N	RLW						
S 3	S 2						
S10	S11						
40.00	<p>N. 89°58' E., on random line, bet. secs. 2 and 11. Set temp. $\frac{1}{4}$ sec. cor.</p>						
79.98	<p>Intersect N. and S. line, 5 lks. S. of the cor. of secs. 1, 2, 11, and 12. Thence S. 89°56' W., on true line, bet. secs. 2 and 11. Over mountainous land, thru scattering timber and medium undergrowth. Ascend 75 ft. over SE. slope.</p>						
4.50	Spur, slopes N. 30° E.; descend 87 ft. over NW. slope.						
10.20	Wash, 10 lks. wide, course NE.; ascend 340 ft. over SE. slope.						
38.00	Spur, slopes S.; a peak, 100 ft. high, bears N., 3 chs. dist.; descend 12 ft. over SW. slope to						
39.99	<p>Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>$\frac{1}{4}$</td> <td>S 2</td> </tr> <tr> <td></td> <td>S 11</td> </tr> </table> <p style="text-align: center;">1939</p> <p>No bearing trees available.</p> <p>Raise a mound of stone, 4 ft. base, 3 ft. high, N. of cor.</p> <p>Descend 286 ft. over SW. slope.</p>	$\frac{1}{4}$	S 2		S 11		
$\frac{1}{4}$	S 2						
	S 11						
57.80	Wash, 25 lks. wide, course S.; ascend 270 ft. over E. slope to sec. cor.						
61.50	Old, unimproved road, bears N. and S.						
79.98	The cor. of secs. 2, 3, 10, and 11.						
	<p>Land, mountainous. Soil, volcanic ash, rocky, 3rd and 4th rates. Timber, palo verde, ironwood, catclaw, and mesquite. Undergrowth, greasewood, sage, palo verde, and cacti.</p>						

Survey: Subdivisional lines: T. 6 N., R. 1 W.

BOOK 4838

41.

Chains

N. 0°01' W., bet. secs. 2 and 3.

Over mountainous land, thru scattering timber and medium undergrowth.

Ascend 57 ft. along E. slope.

4.00 Top of ascent; crest of circular, rock capped hill, bears W., 1.50 chs. dist.; descend 230 ft. over NE. slope.

20.50 Gulch, course NE.; ascend 50 ft. over S. slope.

23.00 Short spur, slopes NE.; descend 30 ft. over N. slope.

31.70 Wash, 40 lks. wide, course S. 60° E.; ascend 20 ft. over SE. slope.

36.60 Low spur, slopes E.; descend slightly over NE. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
 S3 | S2

1939

No bearing trees available.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Descend slightly over NE. slope.

41.70 Head of drain, course S. 60° E.; ascend 15 ft. over gradual S. slope.

53.00 Base of hill, bears E. and W.; ascend 256 ft. over precipitous S. slope.

61.20 Top of rock ledge on spur, slopes SE.; descend 181 ft. over N. slope.

73.20 Gulch, course N. 70° E.; ascend 40 ft. over SE. slope to

75.98 Intersect N. bdy. of Tp. at a point 4.25 chs., S. 89°59' W. from cor. of secs. 34 and 35, T. 7 N., R. 1 W., hereinbefore described.

At point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for closing cor. of secs. 2 and 3, with brass cap marked

T7N R1W
 S34
 S3 | S2
 T6N | R1W
 C C

1939

No bearing trees available.

Land, mountainous.

Soil, volcanic ash, rocky, 3rd and 4th rates.

Timber, palo verde, ironwood, and mesquite.

Undergrowth, greasewood, sage, mesquite, cacti, and ocotillo.

Chains

The cor. of secs. 3, 4, 33, and 34, on S. bdy. of Tp., is an iron post, 2 ins. in diam., projecting 10 ins. above ground, firmly set, properly marked on brass cap, and witnessed by a mound of stone W.

Thence

N. 0°01' W., bet. secs. 33 and 34.

Over mountainous land, thru scattering timber and medium undergrowth.

Descend 10 ft. over NW. slope.

1.40 Draw, course SW.; ascend 44 ft. over S. slope.

3.70 Ridge, bears NW. and SE.; descend 35 ft. over NW. slope.

6.20 Gulch, course NE.; thence, along broken E. slope.

16.50 Same gulch, course NW.; thence, along W. slope.


21.00 Same gulch, course NE.; ascend 20 ft. over SE. slope.

31.60 Short spur, slopes E.; descend 45 ft. over N. slope.

35.30 Wash, 20 lks. wide, course E.; ascend 35 ft. over S. slope.

39.50 Spur, slopes NE.; thence, along NE. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for 1/4 sec. cor., with brass cap marked



1939

No bearing trees available.

Continue along NE. slope.

44.20 Gulch, course SE.; ascend 74 ft. over SW. slope.

53.20 Spur, slopes SE.; thence, along E. slope.


53.70 Spur, slopes NE.; descend 133 ft. over broken NW. slope.

70.40 Gulch, course NE.; ascend 25 ft. over S. slope.

71.50 Toe of spur, slopes E.; descend 23 ft. along E. slope.

76.30 Gulch, course S. 30° E.; ascend 25 ft. over SW. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in ground, for cor. of secs. 27, 28, 33, and 34, with brass cap marked



1939

No bearing trees available.

Raise a mound of stone, 3 ft. base, 2 1/2 ft. high, W. of cor.

Survey: Subdivisional lines: T. 6 N., R. 1 W.

BOOK 4233

43.

Chains

Land, mountainous.
 Soil, volcanic ash, rocky, 3rd and 4th rates.
 Timber, palo verde, ironwood, mesquite, and catclaw.
 Undergrowth, greasewood, palo verde, sage, cacti, and
 ocotillo.

S. 89°53' E., on random line, bet. secs. 27 and 34.

40.00 Set temp., $\frac{1}{4}$ sec. cor.

79.84 Intersect N. and S. line, 5 lks. N. of the cor. of secs.
 26, 27, 34, and 35.

Thence

N. 89°51' W., on true line, bet. secs. 27 and 34.

Over mountainous land, thru scattering timber and medium
 undergrowth.

Descend 25 ft. over SW. slope.

6.40 Wash, 1.00 ch. wide, course SE.; ascend 35 ft. over E.
 slope.

9.80 Toe of low spur, slopes SE.; thence, along broken S. slope.

22.10 Wash, 40 lks. wide, course SE.; ascend 18 ft. over gradual
 NE. slope.

35.30 Unimproved road, bears N. and S.

39.10 Wash, 15 lks. wide, course N. 60° E.; thence, along S.
 slope to

39.92 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in
 ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ $\frac{S\ 27}{S\ 34}$

1939

No bearing trees available.

Raise a mound of stone, 4 ft. base, 3 ft. high, N. of
 cor.

Continue along S. slope.

45.60 Wash; 20 lks. wide, course S. 80° E.; thence, along N.
 slope.

51:20 Same wash, course NE.; thence over NE. slope.

55.00 Gulch, course N. 60° E.; thence, along S. slope.

59.00 Same gulch, course SE.; thence over SE. slope.

62.10 Bend in gulch, course S. 80° E. from S. 80° W.; ascend 63
 ft. over SE. slope.

72.30 Head of draw, course S. 80° E.; ascend 50 ft. over E.
 slope.

75.30 Spur, slopes SE.; descend 26 ft. over SW. slope.

79.84 The cor. of secs. 27, 28, 33, and 34.

Chains	
	Land, mountainous. Soil; volcanic ash, rocky, 3rd and 4th rates. Timber, palo verde, ironwood, catclaw, and mesquite. Undergrowth, greasewood, sage, palo verde, cacti, and ocotillo.
	N. 0°01 W., bet. secs. 27 and 28.
	Over mountainous land, thru scattering timber and medium undergrowth.
	Ascend 76 ft. over SW. slope.
7.00	Spur, slopes SE.; descend 104 ft. over N. slope.
14.70	Draw, course SE.; ascend 66 ft. over S. slope.
20.40	Spur, slopes E.; peak on spur, bears E., 2.00 chs. dist.; descend 89 ft. over N. slope.
22.00	Inclined mine shaft, approximately 100 ft. deep, bears E., 60 lks. dist.
27.80	Deep wash, 15 lks. wide, course N. 70° E.; ascend 45 ft. over S. slope.
29.00	Dim road, bears NE. and SW.
30.10	Short spur, slopes E.; descend 65 ft. over N. slope.
32.50	Wash, 60 lks. wide, course N. 60° E.; thence, over broken land.
39.70	Wash, 20 lks. wide, course SE.; ascend slightly over SE. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ S28 S27 1939
	No bearing trees available.
	Raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.
	Ascend 48 ft. over SE. slope.
48.20	Short spur, slopes E.; descend 25 ft. over N. slope.
52.10	Gulch, course SE.; ascend 35 ft. over S. slope.
54.80	Spur, slopes E.; descend 50 ft. over N. slope.
57.20	Gulch, course S. 60° E.; ascend 60 ft. over SE. slope.
61.20	Short spur, slopes E.; descend 57 ft. over NE. slope.
67.50	Wash, 70 lks. wide, course SE.; thence along W. slope.
73.60	Same wash, course SW.; thence, along E. slope.
75.50	Same wash, course SE.; thence, along W. slope to

Survey: Subdivisional lines: T. 6 N., R. 1 W.

Chains

77.50 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in ground, for witness cor. to cor. of secs. 21, 22, 27, and 28, with brass cap marked

W C	
T6N	R1W
S21	S22
S28	S27

1939

No bearing trees available.

Raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.

Continue along W. slope.

779:00 Enter wash, 40 lks. wide, course S. 15° W. from N.

80.00 True point for cor. of secs. 21, 22, 27, and 28, in bed of wash where it is impracticable to monument cor., therefore establish witness cor., S. 0°01' E., 2.50 chs. dist., as described above.

Land, mountainous.
Soil, volcanic ash, rocky, 3rd and 4th rates.
Timber, palo verde, catclaw, mesquite, and ironwood.
Undergrowth, greasewood, palo verde, cacti, sage, and ocotillo.

From true point for cor. of secs. 21, 22, 27, and 28, S. 89°51' E., on random line, bet. secs. 22 and 27.

40.00 Set temp. 1/4 sec. cor.

79.94 Intersect the cor. of secs. 22, 23, 26, and 27.

Thence

N. 89°51' W., on true line, bet. secs. 22 and 27.

Over mountainous land, thru scattering timber and medium undergrowth.

Descend 32 ft. over SW. slope.

1.90 Gulch, course SE.; ascend 98 ft. over SE. slope.

12.70 Spur, slopes S.; descend 100 ft. over W. slope.

18.00 Gulch, course S.; thence, over broken land.

23.90 Wash, 15 lks. wide, course S. 20° E.; continue over broken land.

30.00 Low ridge, bears N. and S.; descend slightly.

39.50 Drain, course SW.; ascend slightly over broken SE. slope.

39.97 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for 1/4 sec. cor., with brass cap marked

1/4	S 22
	S 27

1939

Survey: Subdivisional lines: T. 6 N., R. 1 W.

.46

46.

Chains

	No bearing trees available.
	Ascend 12 ft. over broken SE. slope.
46.30	Gulch, course S. 20° E.; ascend 35 ft. over E. slope.
53.80	Spur, slopes SE.; descend 45 ft. over SW. slope.
57.10	Gulch, course SE.; ascend 50 ft. over E. slope.
62.20	Short spur, slopes S.; thence, along broken S. slope.
70.00	Gulch, course SE.; ascend 71 ft. over E. slope.
75.00	Spur, slopes S.; descend 115 ft. over SW. slope.
79.80	Enter wash, course S.
79.94	The true point for cor. of secs. 21, 22, 27, and 28. (W.C. S. 0°01' E., 2.50 chs. dist.)
	Land, broken and mountainous. Soil, volcanic ash, rocky, 3rd and 4th rates. Timber, palo verde, catclaw, mesquite, and ironwood. Undergrowth, greasewood, sage, cacti, palo verde, and ocotillo.
	From true point for cor. of secs. 21, 22, 27, and 28. N. 0°01' W., bet. secs. 21 and 22.
	Over mountainous land, thru scattering timber, and medium undergrowth.
	Along bed of dry wash.
2.20	Leave wash, course S. from NW. corner; thence along Thence along W. slope.
5.30	Wash, 10 lks. wide, course SW.; ascend 50 ft. over SW. slope.
10.60	Short spur, slopes SE.; thence, along E. slope.
15.40	Enter gulch, course S. 30° E. from N.; thence, along bottom of gulch.
18.50	Leave gulch, course S. from NE.; ascend 87 ft. over SE. slope.
28.00	Spur, slopes S. 60° E.; descend 50 ft. over NE. slope.
33.00	Gulch, course SE.; ascend 35 ft. over SW. slope.
36.00	Short spur, slopes W.; descend 40 ft. over N. slope.
38.60	Gulch, course NW.; thence, along broken W. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, for 4 sec. cor., with brass cap marked
	S21 S22
	1939
	No bearing trees available.
	Raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.

Survey: Subdivisional lines: T. 6 N., R. 1 W.

BOOK 425

47.

Chains	Continue along broken W. slope.						
42.20	Low, flat ridge, bears NW. and SE.; thence, along E. slope.						
48.00	Short spur, slopes E.; descend 40 ft. over N. slope.						
50.90	Gulch, course E.; ascend 30 ft. over S. slope.						
53.20	Short spur, slopes E.; descend 30 ft. over N. slope.						
63.10	Spur, slopes E.; descend 55 ft. over NW. slope.						
69.60	Gulch, course NE.; ascend 15 ft. over SE. slope.						
72.40	Short spur, slopes N. 60° E.; descend 25 ft. over N. slope.						
74.70	Gulch, course S. 60° E.; ascend 30 ft. over SE. slope.						
79.60	Change to E. slope.						
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in ground, for cor. of secs. 15, 16, 21, and 22, with brass cap marked						
	<table border="1"> <tr> <td>T6N</td> <td>RLW</td> </tr> <tr> <td>S16</td> <td>S15</td> </tr> <tr> <td>S21</td> <td>S22</td> </tr> </table>	T6N	RLW	S16	S15	S21	S22
T6N	RLW						
S16	S15						
S21	S22						
	1939						
	No bearing trees available. from which						
	An ironwood, 5 ins. in diam., bears N. 51½° E., 127 lks. dist., marked BT.						
	An ironwood, 5 ins. in diam., bears N. 82° W., 121 lks. dist., marked T6N RLW S16 BT.						
	Raise a mound of stone, 2 ft. base, 2 ft. high, W. of cor.						
	Land, mountainous. Soil, volcanic ash, rocky, 3rd and 4th rates. Timber, palo verde, ironwood, mesquite, and catclaw. Undergrowth, greasewood, sage, palo verde, cacti, and ocotillo.						
	S. 89°51' E., on random line, bet. secs. 15 and 22.						
40.00	Set temp ¼ sec. cor.						
79.88	Intersect N. and S. lines, 4 lks. N. of the cor. of secs. 14, 15, 22; and 23.						
	Thence						
	N. 89°49' W., on true line, bet. secs. 15 and 22.						
	Over mountainous land, thru scattering timber and medium undergrowth.						
	Descend 20 ft. over SW. slope.						
0.80	Gulch, course SE.; thence, over broken SE. and S. slopes.						
20.90	Morgan City Wash, 1.50 chs. wide, course S. 25° E.; road in wash, bears N. 19½° W. and S. 25° E.; ascend 142 ft. along N. slope to						

Chains

- 39.94 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
- $\frac{1}{4}$ $\frac{S 15}{S 22}$
- 1939
- No bearing trees available.
- Raise a mound of stone, 4 ft. base, 3 ft. high, N. of cor.
- Ascend 37 ft. along N. slope.
- 48.20 Short spur, slopes NW.; descend 88 ft. over NW. slope.
- 55.50 Wash, 25 lks. wide, course N.; ascend 123 ft. over broken E. slope.
- 71.30 Short spur, slopes SE.; descend 25 ft. over broken SW. slope.
- 77.70 Gulch, course SE.; ascend 25 ft. over E. slope to
- 79.88 The cor. of secs. 15, 16, 21, and 22.

Land, mountainous.
Soil, volcanic ash, rocky, 3rd and 4th rates.
Timber, palo verde, mesquite, ironwood, and catclaw.
Undergrowth, greasewood, sage, mesquite, palo verde, cacti, and ocotillo.

N. $0^{\circ}01'$ W., bet. secs. 15 and 16.

Over mountainous land, thru scattering timber and medium undergrowth.

Along E. slope.

- 1.20 Spur, slopes NE.; thence, along W. slope.
- 10.70 Short spur, slopes N. 75° W.; descend 75 ft. over NE. slope.
- 15.40 Wash, 15 lks. wide, course E.; ascend 30 ft. over S. slope.
- 23.00 Spur, slopes E.; descend 30 ft. over N. slope.
- 29.10 Gulch, course NE.; ascend 60 ft. over SE. slope to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S16 | S15

1939

from which

A mesquite, 10 ins. in diam., bears N. $25\frac{3}{4}^{\circ}$ E., 57 lks. dist., marked $\frac{1}{4}$ S15 BT.

A mesquite, 12 ins. in diam., bears N. $35\frac{1}{2}^{\circ}$ W., 75 lks. dist., marked $\frac{1}{4}$ S16 BT.

Survey: Subdivisional lines: T. 6 N., R. 1 W.

BOOK 4233

49.

Chains

Descend slightly.

41.00 Wash, 35 lks. wide, course E.; ascend 107 ft. over S. slope.

50.00 Spur, slopes E.; descend 95 ft. over N. slope.

57.40 Wash, 10 lks. wide, course E.; ascend 132 ft. over S. slope.

65.00 Spur, slopes E.; descend 148 ft. over NE. slope.

72.40 Wash, 40 lks. wide, course SE.; with old road in bottom,
bearing NW. and SE.; ascend 37 ft. over SW. slope.

78.50 Top of ascent; thence, over flat topped spur to

80.00 Spur, slopes S. 30° E.

Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in
ground, for cor. of secs. 9, 10, 15, and 16, with brass
cap marked

T6N	RLW
S 9	S 10
S 16	S 15

1939

No bearing trees available.

Raise a mound of stone, 3 ft. base, 3 ft. high, W. of
cor.

Land, mountainous..

Soil, volcanic ash, rocky, 3rd and 4th rates.

Timber, palo verde, mesquite, catclaw, and ironwood..

Undergrowth, greasewood, mesquite, palo verde, cacti, sage,
and ocotillo.

S. 89°49' E., on random line, bet. secs. 10 and 15.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.90 Intersect the cor. of secs. 10, 11, 14, and 15.

Thence

N. 89°49' W., on true line, bet. secs. 10 and 15.

Over mountainous land, thru scattering timber and medium
undergrowth.

Descend 150 ft. along broken S. slope.

28.00 Wash, 25 lks. wide, course SE.; ascend 33 ft. over SE.
slope.

33.30 Gulch, course SE.; ascend 8 ft. along N. slope to

39.95 Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in
ground to bedrock over a cross (+) chiseled thereon,
and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with
brass cap marked

$\frac{1}{4}$	S 10
	S 15

1939

No bearing trees available.

Survey: Subdivisional lines: T. 6 N., R. 1 W.

. 50

50.

Chains	
	Continue along N. slope.
40.30	Gulch, course NE.; thence, along S. slope.
43.80	Same gulch, course SE.; ascend 132 ft. over E. slope.
57.10	Ridge, bears NW. and SE.; descend 206 ft. over W. slope.
69.40	Morgan City Wash, 1.60 chs. wide; course S. 60° E.; road in bed of wash, bears N. 60° W. and S. 60° E.; ascend 50 ft. over E. slope.
78.70	Top of ascent, bears NW. and SE.; thence, across flat top of spur.
79.90	The cor. of secs. 9, 10, 15, and 16. Land, mountainous. Soil, volcanic ash, rocky, 3rd and 4th rates. Timber, mesquite, catclaw, palo verde, and ironwood. Undergrowth, greasewood, sage, cacti, palo verde, mesquite, and ocotillo.
	N. 0°01' W., bet. secs. 9 and 10. Over mountainous land, thru scattering timber and medium undergrowth. Along flat top of spur.
3.00	Descend 35 ft. over NE. slope.
5.80	Morgan City Wash, 2.00 chs. wide, course S. 60° E. from N. 30° W.; road in bed of wash, bears N. 30° W. and S. 60° E.; thence, across wash bottom.
12.00	Leave wash bottom, bears NW. and SE.; ascend 120 ft. over SW. slope.
25.00	Short spur, slopes W.; descend 25 ft. over N. slope.
26.70	Short gulch, course W.; ascend 94 ft. over SW. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\begin{array}{c} \frac{1}{4} \\ S 9 \quad \quad S 10 \end{array}$
	1939
	No bearing trees available.
	Ascend 20 ft. over SW. slope.
47.00	Spur, slopes S. 70° W.; thence, along W. slope.
49.00	A shallow well, bears W.; 10.00 chs. dist.
50.00	Change to NW. slope; descend 75 ft.
54.30	Gulch, course W.; ascend 30 ft. over SW. slope.
55.70	Short spur, slopes W.; descend 40 ft. over N. slope.

Survey: Subdivisional lines: T. 6 N., R. 1 W.

BOOK 4233

51.

Chains
58.90 Wash, 10 lks. wide, course W.; ascend 25 ft. over SW. slope.
62.00 Short spur, slopes SW.; thence, along W. slope.
69.00 Wash, 15 lks. wide, course S. 30° W.; ascend 40 ft. over SE. slope.
72.50 Short spur, slopes E.; descend 20 ft. over NE. slope.
79.20 Gulch, course SE;; ascend 8 ft. over SW. slope to
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for cor. of secs. 3, 4, 9, and 10, with brass cap marked

T6N	RLW
S 4	S 3
S 9	S 10

1939

No bearing trees available.

Land, mountainous.

Soil, volcanic ash, rocky, 3rd and 4th rates.

Timber, palo verde, mesquite, catclaw, and ironwood.

Undergrowth, greasewood, sage, palo verde, ocotillo, and cacti.

S. 89°49' E., on random line, bet secs. 3 and 10.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.90 Intersect the cor. of secs. 2, 3, 10, and 11.

Thence

N. 89°49' W., on true line, bet. secs. 3 and 10.

Over mountainous land, thru scattering timber and medium undergrowth.

Descend 112 ft. over SW. slope.

10.90 Gulch, course S.; ascend 130 ft. over SE. slope.

27.70 Short spur, slopes S.; descend 63 ft. over SW. slope to

39.95 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S 3
	S 10

1939

No bearing trees available.

Raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.

Descend 35 ft. over SW. slope.

50.00 Wash, 10 lks. wide, course S. 60° E.; ascend 88 ft. over NE. slope.

Survey: Subdivisional lines: T. 6 N., R. 1 W.

52

52.

Chains	
61.20	Short spur, slopes N.; descend 35 ft. over NW. slope.
72.90	Ridge, bears NW. and SE.; descend 30 ft. over SW. slope to
79.90	The cor. of secs. 3, 4, 9, and 10.
	Land, mountainous. Soil, volcanic ash, rocky, 3rd and 4th rates. Timber, palo verde, ironwood, mesquite, and catclaw. Undergrowth, greasewood, palo verde, cacti, sage, mesquite, and, ocotillo.
	N. 0°01' W., bet. secs. 3 and 4.
	Over mountainous land, thru scattering timber and medium undergrowth.
	Ascend slightly over SW. slope.
4.20	Gulch, course SW.; ascend 40 ft. over S. slope.
11.00	Low ridge, bears N. 60° W. and S. 60° E.; thence, along E. slope.
23.60	Drain, course S. 60° E.; ascend 45 ft. over S. slope.
34.00	Ridge, bears E. and W.; descend 104 ft. over NW. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\begin{array}{c} \frac{1}{4} \\ S\ 4 \quad \quad S\ 3 \\ 1940 \end{array}$
	No bearing trees available.
	Raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.
	Descend 40 ft. over NW. slope.
42.30	Gulch, course NE.; thence, along E. slope.
54.30	Gulch, course SE.; ascend 55 ft. over SE. slope.
61.00	Ridge, bears E. and W.; descend 90 ft. over NE. slope.
69.50	Gulch, course NW.; descend 50 ft. along W. slope to
75.78	Intersect N. bdy. of Tp. at a point 5.18 chs., N. 89°36' W. from cor. of secs. 33 and 34, T. 7 N., R. 1 W., herein- before described. At point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 6 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for closing cor. of secs. 3 and 4, with brass cap marked
	$\begin{array}{c} T7N\ RLW \\ S33 \\ S\ 4 \quad \quad S\ 3 \\ T6N \quad \quad RLW \\ C\ C \\ 1939 \end{array}$
	No bearing trees available.

Survey: Subdivisional lines: T. 6 N., R. 1 W.

BOOK 4288

53.

Chains

Land, mountainous.
Soil, volcanic ash, rocky, 3rd and 4th rates.
Timber, mesquite, palo verde, catclaw, and ironwood.
Undergrowth, greasewood, palo verde, cacti, mesquite, sage,
and ocotillo.

The cor. of secs. 4, 5, 32, and 33, on S. bdy. of the Tp.
is an iron post, 2 ins. in diam., projecting 24 ins.
above ground, firmly set in a mound of stone, properly
marked on brass cap, and witnessed by a mound of stone
W.

Thence

N. 0°02' W., bet. secs. 32 and 33.

Over mountainous land, thru scattering timber, and medium
undergrowth.

Descend 131 ft. over NE. slope.


15.00 Gulch, course N. 60° W.; ascend 15 ft. over S. slope.

16.10 Toe of spur, slopes W.; descend 15 ft. over N. slope.

17.00 Wash, 10 lks. wide, course S. 80° W.; ascend 70 ft. over
broken SW. slope.

36.40 Short spur, slopes W.; descend 20 ft. over broken NW. slope
to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 15 ins. in
ground to bedrock with a stone 6x4x3 ins. marked with
a cross (+) deposited at base, and in a mound of stone
to top, for 1/4 sec. cor., with brass cap marked



1939

No bearing trees available.

Descend 35 ft. over NW. slope.

45.20 Wash, 20 lks. wide, course SW.; ascend 75 ft. over SE.
slope.


48.40 Dim road, bears NE. and SW.

56.10 Short spur, slopes E.; descend 75 ft. over NE. slope.

59.60 Gulch, course SE.; thence, over broken SE. slope.

67.80 Gulch, course SE.; ascend 40 ft. over SW. slope. to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in
ground, for cor. of secs. 28, 29, 32, and 33, with
brass cap marked



1939

No bearing trees available.

Chains	<p>Raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.</p> <p>Land, mountainous. Soil, volcanic ash, rocky, 3rd and 4th rates. Timber, palo verde, ironwood, and mesquite. Undergrowth, greasewood, sage, palo verde, cacti, and ocotillo.</p>
	S. 89°53' E., on random line, bet. secs. 28 and 33.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.00	Intersect the cor. of secs. 27, 28, 33, and 34.
	Thence
	N. 89°53' W., on true line, bet. secs. 28 and 33.
	Over mountainous land, thru scattering timber and medium undergrowth.
	Descend 25 ft. over SW. slope.
2.80	Gulch, course SE.; thence along N. slope.
12.80	Enter gulch, course NE. from W.; thence, along bottom of gulch.
15.50	Leave gulch, course E. from NW.; thence, along N. slope.
19.50	Same gulch, course N. 80° E.; ascend 70 ft. over E. slope.
24.50	Spur, slopes NE.; descend 50 ft. over NW. slope.
28.30	Gulch, near head, course N.; ascend 40 ft. over NE. slope.
31.00	Spur, slopes N.; descend 55 ft. over W. slope.
32.90	Gully, course N.; ascend 30 ft. over NE. slope to
35.00	Top of ascent; thence, along N. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S 28}{S 33}$
	1939
	No bearing trees available.
	Descend 35 ft. long N. slope.
47.70	Wash, 10 lks. wide; course NE. from NW.; ascend 71 ft. over E. slope.
56.90	Short spur, slopes NE.; descend 25 ft. over NW. slope.
61.00	Saddle in ridge, bears NW. and SE.; thence, along S. slope.
66.50	Gulch, course S.; ascend 46 ft. over broken SE. slope.
78.90	Low spur, slopes S.; descend 10 ft. over SW. slope to
80.00	The cor. of secs. 28, 29, 32, and 33.

Survey: Subdivisional lines: T. 6 N., R. 1 W.

BOOK 4283

55.

Chains

Land, mountainous.
Soil, volcanic ash, rocky, 3rd and 4th rates.
Timber, palo verde, ironwood, and mesquite.
Undergrowth, greasewood, palo verde, sage, cacti, and ocatillo.

N. 0°02' W., bet. secs. 28 and 29.

Over mountainous land, thru scattering timber and medium undergrowth.

Ascend 49 ft. over SW. slope.

5.50 Spur, slopes SE.; descend 40 ft. over broken NE. slope.

14.10 Gulch, course E.; ascend 75 ft. over S. slope.


20.00 Ridge, bears E. and W.; descend 95 ft. over N. slope.

25.20 Gulch, course E.; ascend 72 ft. over S. slope.

30.50 Short spur, slopes S. 70° E.; descend 85 ft. over NE. slope.

35.70 Gulch, course S. 60° E.; ascend 35 ft. over broken SW. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, for 1/4 sec. cor., with brass cap marked



1939

No bearing trees available.

Raise a mound of stone, 3 ft. base, 2 1/2 ft. high, W. of cor.

Ascend 117 ft. over broken SW. slope.

48.80 Ridge, bears NW. and SE.; descend 170 ft. over N. slope.

58.60 Gulch, course SE.; ascend 83 ft. over broken SW. slope.


63.10 Short spur, slopes SE.; thence, along E. slope.

66.00 Spur, slopes S. 60° E.; descend 85 ft. over N. slope.

72.10 Wash, 15 lks. wide, course S. 60° E.; ascend gradually over SE. slope.

77.00 Dim road, bears N. 30° E. and S. 30° W.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in ground, for cor. of secs. 20, 21, 28, and 29, with brass cap marked



1939

from which

An ironwood, 10 ins. in diam., bears N. 35 3/4° E., 132 lks. dist., marked T6N RLW S21 BT.

Chains

An ironwood, 8 ins. in diam., bears S. $54\frac{1}{2}^{\circ}$ E., 20 lks. dist., marked T6N RLW S28 BT.

An ironwood, 6 ins. in diam., bears S. $41\frac{1}{4}^{\circ}$ W., 48 lks. dist., marked T6N RLW S29 BT.

An ironwood, 10 ins. in diam., bears N. $25\frac{1}{4}^{\circ}$ W., 127 lks. dist., marked T6N RLW S20 BT.

Land, mountainous.

Soil, volcanic ash, rocky, 3rd and 4th rates.

Timber, palo verde, ironwood, mesquite, and catclaw.

Undergrowth, greasewood, sage, mesquite, cacti, and ocotillo.

S. $89^{\circ}53'$ E., on random line, bet. secs. 21 and 28.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.02 Intersect N. and S. line, 7 lks. S. of the true point for cor. of secs. 21, 22, 27, and 28. (W.C. S. $0^{\circ}01'$ E., 2.50 chs. dist.)

Thence

N. $89^{\circ}56'$ W., on true line, bet. secs. 21 and 28.

Over mountainous land, thru scattering timber and medium undergrowth.

Across bed of dry wash, course S. 15° W.

0.25 Leave wash; ascend 59 ft. over E. slope.

4.80 Short spur, slopes S.; descend 25 ft. over SW. slope.

6.40 Wash, 10 lks. wide, course SE.; ascend 110 ft. over NE. slope.

21.00 Top of ascent; descend 29 ft. along N. slope.

25.90 Ridge, bears NW. and SE.; thence, along broken S. slope.

33.20 Gulch, course SE.; ascend 89 ft. over NE. slope.

40.01 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 21
S 28

1939

No bearing trees available.

Raise a mound of stone, 4 ft. base, 3 ft. high, N. of cor.

Ascend 17 ft. over NE. slope.

42.40 Ridge, bears N. and S.; descend 125 ft. over W. slope.

55.60 Wash, 40 lks. wide, course S. 20° W.; ascend 34 ft. over SE. slope.

66.90 Dim road, bears N. 20° E. and S. 20° W.

73.30 Low spur, slopes S.; descend 23 ft. over W. slope.

Survey: Subdivisional lines: T. 6 N., R. 1 W.

BOOK 4288

57.

Chains

- 75.40 Drain, course S. 20° W.; ascend gradual SE. slope.
- 77.40 Drain, course SE.; continue over gradual SE. slope to sec. cor.
- 79.60 Dim road, bears N. and S.
- 80.02 The cor.. of secs. 20, 21, 28, and 29.

Land, mountainous.
 Soil, volcanic ash, rocky, 3rd and 4th rates.
 Timber, palo verde, ironwood, mesquite, and catclaw.
 Undergrowth, greasewood, sage, palo verde, mesquite, cacti, and ocotillo.

N. 0°02' W., bet. secs. 20 and 21.

Over mountainous land, thru scattering timber and medium undergrowth.


Ascend 42 ft. over SE. slope.

- 16.30 Wash, 25 lks. wide, course SE.; ascend 136 ft. over SE. slope.

- 29.00 Spur, slopes SE.; descends 58 ft. over NE. slope.

- 34.60 Gulch, course SE.; thence along W. slope to

- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, for 1/4 sec. cor., with brass cap marked



from which

An ironwood, 5 ins. in diam., bears N. 65 3/4° E., 119 lks. dist., marked 1/4 S21 BT.

An ironwood, 8 ins. in diam., bears N. 80° W., 76 lks. dist., marked 1/4 S20 BT.

Peak of a prominent mountain, bears N. 78°28' W.


Continue along W. slope.

- 40.60 Drain, course S. 20° W.; ascend 330 ft. over broken SE. slope.

- 69.06 Peak of prominent mountain (mentioned at 40 chs.), bears S. 71°20' W.

- 69.20 Ridge, bears NE. and SW.; descend 256 ft. over NW. slope to

- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for cor. of secs. 16, 17, 20, and 21, with brass cap marked



No bearing trees available.

Chains

Land, mountainous.
Soil, volcanic ash, rocky, 3rd and 4th rates.
Timber, palo verde, ironwood, mesquite, and catclaw.
Undergrowth, greasewood, palo verde, sage, cacti, and
ocotillo.

S. 89°56' E., on random line, bet. secs. 16 and 21.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.08 Intersect N. and S. line, 9 lks. S. of the cor. of secs.
15, 16, 21, and 22.

Thence

West on true line, bet. secs. 16 and 21.

Over mountainous land, thru scattering timber and medium
undergrowth.

Ascend 15 ft. over E. slope.

1.40 Spur, slopes NE.; ascend 30 ft. long N. slope.

6.10 Same spur, slopes SE.; ascend 15 ft. along S. slope.

9.40 Same spur, slopes NE.; descend 85 ft. over NW. slope.

20.60 Gulch, course NE.; ascend 67 ft. over SE. slope.

30.50 Spur, slopes NE.; descend 45 ft. over NW. slope.

36.00 Gulch, course NE.; ascend 70 ft. over SE. slope to

40.04 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in
ground to bedrock over a cross (+) chiseled thereon,
and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with
brass cap marked

$\frac{1}{4}$ S 16
S 21.

1939

No bearing trees available.

Ascend 90 ft. over SE. slope.

49.10 Spur, slopes N. 75° E.. Thence along
broken N. and NE. slopes.

70.10 Spur, slopes NE.; descend 46 ft. over NW. slope to

80.08 The cor. of secs. 16, 17, 20, and 21.

Land, mountainous.
Soil, volcanic ash, rocky, 3rd and 4th rates.
Timber, palo verde, ironwood, and mesquite.
Undergrowth, greasewood, sage, palo verde, cacti, and
ocotillo.

N. 0°02' W., bet. secs. 16 and 17.

Over mountainous land, thru scattering timber and medium
undergrowth.

Descend 125 ft. over N. slope.

10.50 Gulch, course NE.; thence, along E. slope.

Survey: Subdivisional lines: T. 6 N., R. 1 W.


BOOK 4250

Chains

26.50 Spur, slopes E.; descend 140 ft. over N. slope.

39.00 Wash, 10 lks. wide, course E.; ascend 15 ft. over broken SE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



1949.

from which

An ironwood, 5 ins. in diam., bears N. $60\frac{3}{4}^\circ$ E., 34 lks. dist., marked $\frac{1}{4}$ S16 BT.

An ironwood, 8 ins. in diam., bears S. 62° W., 100 lks. dist., marked $\frac{1}{4}$ S17 BT.

Ascend gradually over broken E. slope.


50.20 Wash, 30 lks. wide, course S. 70° E.; continue gradual ascent over SE. slope.

68.50 Wash, 30 lks. wide, course SE.; ascend 30 ft. over SE. slope.

71.80 Low spur, slopes S. 70° E.; descend 20 ft. over NE. slope.

72.90 Road, bears N. 70° E. and S. 70° W.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for cor. of secs. 8, 9, 16, and 17, with brass cap marked



1940

No bearing trees available.

Land, mountainous.
Soil, volcanic ash, rocky, 3rd and 4th rates.
Timber, palo verde, ironwood, mesquite, and catclaw.
Undergrowth, greasewood, sage, mesquite, palo verde, cacti, and ocatillo.

East, on random line, bet. secs. 9 and 16.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.10 Intersect N. and S. line, 14 lks. N. of the cor. of secs. 9, 10, 15, and 16.

Thence

N. $89^\circ 54'$ W., on true line, bet. secs. 9 and 16.

Over mountainous land, thru scattering timber and medium undergrowth.

Across flat top of spur.

0.50 Edge of spur, bears NW. and SE.; descend 35 ft. over W. slope.

Survey: Subdivisional lines: T. 6 N., R. 1 W.

. 60

60.


Chains	
1.50	Gulch, course S.; ascend 25 ft. over SE. slope.
4.00	Short spur, slopes S.; descend 28 ft. over W. slope.
5.40	Wash, 5 lks. wide, course S.; ascend 50 ft. over SE. slope.
12.60	Short spur, slopes SE.; thence, along broken S. slope.
25.00	Gulch, course S.; continue along broken S. slope.
32.00	Gulch, course S.; continue along broken S. slope to
40.05	Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ $\frac{S 9}{S 16}$
	1940
	from which
	A mesquite, 10 ins. in diam., bears S. 31° W., 59 lks. dist., marked $\frac{1}{4}$ S16 BT.
	A mesquite, 10 ins. in diam., bears N. 39° W., 161 lks. dist., marked $\frac{1}{4}$ S9 BT.
	Continue over broken S. slope.
40.75	Wash, with old road in bottom, course S. 53° E. from N. 19° W.; thence, along N. slope.
43.90	Gulch, course NE.; ascend gradual NE. slope.
55.00	Road, bears N. 70° E. and S. 70° W.
73.50	Small gulch, course N. 75° E.; continue gradual ascent over NE. slope to
80.10	The cor. of secs. 8, 9, 16, and 17.
	Land, mountainous. Soil, volcanic ash, 3rd and 4th rates. Timber, palo verde, mesquite, catclaw, and ironwood. Undergrowth, greasewood, sage, palo verde, mesquite, cacti, and ocotillo.
	N. 0°02' W., bet. secs. 8 and 9.
	Over mountainous land, thru scattering timber and medium undergrowth.
	Descend over gradual NE. slope.
6.10	Wash, 20 lks. wide, course S. 60° E.; ascend 85 ft. over S. slope.
11.20	Spur, slopes E.; descend 40 ft. over NE. slope.
17.50	Head of drain, course S. 70° E.; ascend slightly over broken SE. slope.
29.70	Gulch, course SE.; ascend 30 ft. over S. slope.
34.00	Spur, slopes S. 60° E.; thence, along broken E. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with

Survey: Subdivisional lines: T. 6 N., R. 1 W.

BOOK 4233

Chains

brass cap marked



1940

No bearing trees available.

Continue over E. slope.


43.50 Gulch, course SE.; ascend 60 ft. over SE. slope.

49.50 Spur, slopes E.; descend 160 ft. over NE. slope.

66.90 Morgan City Wash, 3.00 chs. wide, course S. 46½° E. from S. 76½° W.; road in bed of wash, bears S. 46½° E. and S. 76½° W.; ascend 43 ft. over SW. slope.

76.30 Spur, slopes SE.; descend slightly over NE. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in ground, for cor. of secs. 4, 5, 8, and 9, with brass cap marked



1940

No bearing trees available.

Raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.

SW. cor. of W.T.Bonine's ranch house, bears S. 21°37' E., 16.80 chs. dist.

Windmill in ranch yard, bears S. 24°00' E., 18.31 chs. dist.

Water tank, bears S. 27°38' E., 18.36 chs. dist.

NW. cor. of shed, bears S. 28°11' E., 17.55 chs. dist.

Northernmost cor. of stable, bears S. 30°55' E., 18.04 chs. dist.

Westernmost cor. of goatshead, bears S. 38°18' E., 22.57 chs. dist.

Land, mountainous.

Soil, volcanic ash, rocky, 3rd and 4th rates.

Timber, mesquite, catclaw, palo verde, and ironwood.

Undergrowth, greasewood, sage, mesquite, cacti, and ocotillo.

S. 89°54' E., on random line, bet. secs. 4 and 9.

40.00 Set temp. ¼ sec. cor.

80.10 Intersect the cor. of secs. 3, 4, 9, and 10.

Thence

N. 89°54' W., on true line, bet. secs. 4 and 9.

Over mountainous land, thru scattering timber and medium undergrowth.

Descend 7 ft. over SW. slope.

Chains	
71.00	Gulch, course SE.; ascend 60 ft. over NE. slope.
11.60	Ridge, bears NW. and S.; descend 105 ft. over W. slope.
24.00	Wash, 10 lks. wide, course S. 20° W.; thence, along broken S. slope.
30.10	Wash, 25 lks. wide, course S.; continue along broken S. slope.
33.30	Shallow wash, 20 lks. wide, course S. 30° E.; continue along broken S. slope to
40.05	Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S 4}{S 9}$ 1940
	No bearing trees available.
	Continue along broken S. slope.
51.00	Wash, 30 lks. wide, course S.; ascend 50 ft. over NE. slope.
58.10	Short spur, slopes SE.; descend 25 ft. over SW. slope.
60.60	Wash, 40 lks. wide, course SE.; ascend 40 ft. over NE. slope.
80.10	The cor. of secs. 4, 5, 8, and 9.
	Land, mountainous. Soil, volcanic ash, rocky, 3rd and 4th rates. Timber, mesquite, catclaw, palo verde, and ironwood. Undergrowth, greasewood, sage, mesquite, cacti, and ocotillo.
	N. 0°02' W., bet. secs. 4 and 5.
	Over mountainous land, thru scattering timber and medium undergrowth.
	Descend 27 ft. over NE. slope.
2.70	Wash, 20 lks. wide, course E.; ascend 40 ft. over SE. slope.
5.10	Short spur, slopes E.; descend 25 ft. over NE. slope.
7.70	Drain, course SE.; ascend 40 ft. over SE. slope.
13.00	Spur, slopes S. 60° E.; descend 40 ft. over NE. slope.
19.40	Wash, 10 lks. wide, course SE.; ascend 134 ft. over broken S. slope.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S 5}{S 4}$ 1940

Survey: Subdivisional lines: T. 6 N., R. 1 W.

BOOK 4233

63.

Chains

No bearing trees available.

Raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.

Ascend 30 ft. over S. slope.

41.60 Short spur, slopes W.; thence, along W. slope.

46.30 Ridge, bears NW. and SE.; descend 140 ft. over NE. slope.

57.40 Gulch, course E.; ascend 50 ft. over SE. slope.

61.00 Short spur, slopes E.; thence, along E. slope.

65.50 Spur, slopes NE.; descend 100 ft. over NW. slope.

74.30 Gulch, course S. 80° E.; ascend 10 ft. over S. slope to

76.26 Intersect N. bdy. of Tp. at a point, 5.79 chs., N. 89°53'W. from cor. of secs. 32 and 33, T. 7 N., R. 1 W., hereinbefore described.

At point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for closing cor. of secs. 4 and 5, with brass cap marked

T7N RLW
S32
S 5 | S 4
T6N | RLW
C C
1940

No bearing trees available.

Land, mountainous.

Soil, volcanic ash, rocky, 3rd and 4th rates.

Timber, mesquite, palo verde, catclaw, and ironwood.

Undergrowth, greasewood, palo verde, sage, cacti, and mesquite.

Witness cor. to cor. of secs. 5, 6, 31, and 32, on S. bdy. of Tp. is an iron post, 2 ins. in diam., projecting 10 ins. above ground, firmly set, properly marked on brass cap, and witnessed by a mound of stone W. This W.C. is of record as being 25 lks. S. 89°53'E. from sec. cor. point.

Thence, from true point for cor.,

N. 0°02' W., bet. secs. 31 and 32.

Over rolling land, thru scattering timber and medium undergrowth.

Ascend gradually.

2.50 Bend in gulch, course NW. from SW.

6.00 Wash, 40 lks. wide, course N. 70° W.

20.50 Gulch, course SW.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for ¼ sec. cor., with brass cap marked

Chains

 $\frac{1}{4}$

S31 | S32

1939

No bearing trees available.

Continue gradual ascent over rolling land.

52.00 Wash, 40 lks. wide, course SW.; enter mountainous land, bears NW. and SE.; thence, along SW. slope.

63.10 Gulch, course SW.; ascend 25 ft. over SE. slope.

72.50 Low spur, slopes SW.; ascend 50 ft. over broken SW. slope.

78.90 Short spur, slopes W.; descend 20 ft. over N. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in ground, for cor. of secs. 29, 30, 31, and 32, with brass cap marked

T6N . R1W

S30 | S29

S31 | S32

1939

No bearing trees available.

Raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.

Land, mountainous and rolling.

Soils, volcanic ash, 2nd and 3rd rates.

Timber, palo verde, mesquite, and ironwood.

Undergrowth, greasewood, sage, palo verde, cacti, and ocotillo.

S. 89°53' E., on random line, bet. secs. 29 and 32.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.92 Intersect N. and S. line, 2 lks. N. of the cor. of secs. 28, 29, 32, and 33.

Thence

N. 89°52' W., on true line, bet. secs. 29 and 32.

Over mountainous land, thru scattering timber and medium undergrowth.

Descend 15 ft. over SW. slope.

1.60 Head of draw, course S.; ascend 59 ft. over SE. slope.

6.20 Short spur, slopes SW.; thence, along S. slope.

12.10 NE. end of low saddle in ridge, bears NE. and SW.; descend slightly over SW. slope.

18.10 Gulch, course SW.; thence, along S. slope.

23.30 Short gulch, course SE.; ascend 46 ft. over E. slope.

31.70 Spur, slopes SE.; descend 67 ft. over SW. slope.

39.70 Drain, course S. 20° W.; thence, along N. slope to

Survey: Subdivisional lines: T. 6 N., R. 1 W.

BOOK 4233

65.

Chains

39.96 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in ground to bedrock with a stone 2x4x6 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4} \frac{S 29}{S 32}$$

1939

No bearing trees available.

Descend 50 ft. over broken SW. slope.

52.20 Gulch, course SW.; ascend 39 ft. over SE. slope.

66.00 Low spur, slopes S. 70° W.; ascend 12 ft. along N. slope.

76.00 Top of ascent; low peak on spur, bears S., 1.50 chs. dist.; descend 32 ft. along N. slope to

79.92 The cor. of secs. 29, 30, 31, and 32.

Land, mountainous.

Soil, volcanic ash, rocky, 3rd and 4th rates.

Timber, palo verde, mesquite, ironwood, and catclaw.

Undergrowth, greasewood, sage, paloverde, cacti, and ocotillo.

N. 89°53' W.; on random line, bet. secs. 30 and 31.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.48 Intersect the cor. of secs. 25, 30, 31, and 36, on W. bdy. of Tp., which cor. is an iron post, 2 ins. in diam., projecting 26 ins. above ground, firmly set in a mound of stone to top, and properly marked on brass cap.
No accessories.

Thence

S. 89°53' E., on true line, bet. secs. 30 and 31.

Over gently rolling land, thru scattering timber and medium undergrowth.

Ascend gradually.

7.00 Road, bears NE. and SW.

25.50 Road, bears NE. and SW.

25.70 Wash, 30 lks. wide, course S.; continue gradual ascent.


40.48 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
$$\frac{1}{4} \frac{S 30}{S 31}$$

1939

No bearing trees available.

Raise a mound of stone, 3 ft. base, 2½ ft. high, N. of cor.

Continue over gently rolling land.

Chains	
53.00	Wash, 20 lks. wide, course SW.
65.00	Wash, 10 lks. wide, course S.
71.20	Dim road, bears NE. and SW.
73.00	Wash, 20 lks. wide, course SW.; thence, entering mountainous land, ascend 76 ft. over NW. slope.
79.40	Change to N. slope.
80.48	The cor. of secs. 29, 30, 31, and 32.
	Land, rolling and mountainous. Soil, volcanic ash, rocky, 3rd and 4th rates. Timber, palo verde, and mesquite. Undergrowth, greasewood, sage, palo verde, and cacti.
	N. 0°02' W., bet. secs. 29 and 30.
	Over mountainous land, thru scattering timber and medium undergrowth.
	Descend 65 ft. over N. slope.
8.00	Wash, 25 lks. wide, course SW.; ascend 145 ft. over SE. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	<div style="text-align: center;">  </div>
	No bearing trees available.
	Raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.
	Ascend 44 ft. over SE. slope.
59.00	Gulch, course SE.; ascend 152 ft. over S. slope.
66.80	Ridge, bears NE. and SW.; descend 175 ft. over NW. slope.
80.00	Deep gulch, course W. True point for cor. of secs. 19, 20, 29, and 30, in bottom of gulch, where it is impracticable to monument the cor. therefore establish witness cor., N. 0°02' W., 50 lks. dist., as hereinafter described.
	Land, mountainous. Soil, volcanic ash, rocky, 3rd and 4th rates. Timber, palo verde, ironwood, and mesquite. Undergrowth, greasewood, sage, palo verde, and cacti.
	From true point for cor. of secs. 19, 20, 29, and 30.
	S. 89°52' E., on random line, bet. secs. 20 and 29.
40.00	Set temp $\frac{1}{4}$ sec. cor.
79.96	Intersect the cor. of secs. 20, 21, 28, and 29.
	Thence

Survey: Subdivisional lines: T. 6 N., R. 1 W.

BOOK 4283

67

Chains

- N. 89°52' W., on true line, bet. secs. 20 and 29.
 Over mountainous land, thru scattering timber and medium undergrowth.
 Ascend slightly over SE. slope.
- 5.10 Gulch, course SE.; ascend 30 ft. over E. slope.
- 10.00 Toe of spur, slopes SE.; descend 40 ft. over SW. slope.
- 15.00 Gulch, course SE.; thence, over SE. slope.
- 23.20 Wash, 20 lks. wide, course SE.; ascend gradually over E. slope.
- 28.10 Low, flat ridge, bears NW. and SE.; ascend 17 ft. along broken S. slope.
- 38.48 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, for witness $\frac{1}{4}$ sec. cor., with brass cap marked
- $$\begin{array}{r} \text{S } 20 \\ \frac{1}{4} \text{ S } 29 \\ \text{WC} \end{array}$$
 1940
- No bearing trees available.
- Raise a mound of stone, 3 ft. base, 2½ ft. high, N. of cor.
- Continue along S. slope.
- 39.50 Wash, 15 lks. wide, course SE.; ascend slightly.
- 39.98 True point for $\frac{1}{4}$ sec. cor. falls on unsafe ground, where it is impracticable to monument the cor., therefore establish witness cor., S. 89°52' E., 1.50 chs. dist., as hereinbefore described.
- Ascend 231 ft. over NE. slope.
- 59.00 Short spur, slopes N.; descend 80 ft. over NW. slope.
- 63.60 Gulch, course NE.; ascend 40 ft. over SE. slope.
- 65.50 Saddle in ridge, bears NE. and SW.; descend 150 ft. over SW. slope.
- 72.90 Gulch, course SW.; thence, along S. slope.
- 74.00 Same gulch, course W. from SE.; thence, descending slightly along gulch bottom to
- 79.96 The true point for cor. of secs. 19, 20, 29, and 30.
 (W.C. N. 0°02' W., 50 lks. dist.)
- Land, mountainous.
 Soil, volcanic ash, rocky, 3rd and 4th rates.
 Timber, palo verde, ironwood, mesquite, and catclaw.
 Undergrowth, greasewood, palo verde, sage, and cacti.
-
- From true point for cor. of secs. 19, 20, 29, and 30.
 N. 89°53' W., on random line, bet. secs. 19 and 30.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.

Chains											
80.23	Intersect W. bdy. of Tp., 2 lks. S. of cor. of secs. 19, 24, 25, and 30, which is an iron post, 2 ins. in diam., projecting 6 ins. above ground, firmly set, properly marked on brass cap, and witnessed by a mound of stone W.										
	Thence										
	S. 89°52' E., on true line, bet. secs. 19 and 30.										
	Over rolling land, thru scattering timber and medium undergrowth.										
	Ascend gradually.										
7.00	Wash, 40 lks. wide, course SW.; ascend 20 ft. over rolling SW. slope.										
15.20	Change to broken S. slope; ascend 50 ft. to										
40.23	Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked										
	$\frac{\frac{1}{4} S 19}{S 30}$										
	1940										
	No bearing trees available.										
	Ascend 52 ft. along broken S. slope.										
62.40	Gulch, course SW.; enter mountainous land, bearing NE. and SW.; ascend 80 ft. along N. slope.										
78.70	Same gulch, course N. 60° W. from E.; ascend slightly along gulch bottom to										
80.23	The true point for cor. of secs. 19, 20, 29, and 30. (W.C. N. 0°02' W., 50 lks. dist.)										
	Land, mountainous. Soil, volcanic ash, rocky, 3rd and 4th rates. Timber, palo verde, ironwood, mesquite, and catclaw. Undergrowth, greasewood, palo verde, sage, cacti, and ocotillo.										
	From true point for cor. of secs. 19, 20, 29, and 30.										
	N. 0°02' W., bet. secs. 19 and 20.										
	Over mountainous land, thru scattering timber and medium undergrowth.										
	Ascend 15 ft. over SW. slope.										
0.50	Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in ground, for witness cor. to cor. of secs. 19, 20, 29, and 30, with brass cap marked										
	<table border="1"> <tr> <td>T6N</td> <td>RLW</td> </tr> <tr> <td>S19</td> <td>S20</td> </tr> <tr> <td>S30</td> <td>S29</td> </tr> <tr> <td colspan="2" style="text-align: center;">W C</td> </tr> <tr> <td colspan="2" style="text-align: center;">1940</td> </tr> </table>	T6N	RLW	S19	S20	S30	S29	W C		1940	
T6N	RLW										
S19	S20										
S30	S29										
W C											
1940											
	No bearing trees available.										

Survey: Subdivisional lines: T. 6 N., R. 1 W.

BOOK 4233

69

Chains

Raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.

Ascend 50 ft. over SW. slope.

5.00 Short spur, slopes W.; thence along W. slope.

10.10 Short spur, slopes W.; descend 70 ft. over NW. slope.

12.70 Deep wash, 10 lks. wide, course SW.; ascend 300 ft. over S. slope.

28.90 Ridge, bears E. and W.; descend 129 ft. over N. slope.

35.00 Gulch, course NE.; descend 27 ft. over NE. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in ground to bedrock with a stone 3x3x6 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for ¼ sec. cor., with brass cap marked

¼
S19 S20

1940

from which

An ironwood, 4 ins. in diam., bears S. 64½° E., 17 lks. dist., marked ¼ S20 BT.

An ironwood, 5 ins. in diam., bears N. 87½° W., 58 lks. dist., marked ¼ S19 BT.

Descend 60 ft. over NE. slope.

44.50 Gulch, course NW.; thence, along broken W. slope.

55.80 Gulch, course W.; continue along broken W. slope.

73.00 Gulch, course SW.; ascend 13 ft. over broken SW. slope.

75.00 Dim road, bears NE. and SW.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for cor. of secs. 17, 18, 19, and 20, with brass cap marked

T6N	R1W
S18	S17
S19	S20

1940

No bearing trees available.

Land, mountainous.

Soil, volcanic ash, rocky, 3rd and 4th rates.

Timber, palo verde, ironwood, mesquite, and catclaw.

Undergrowth, greasewood, sage, palo verde, cacti, ocotillo, and mesquite.

S. 89°52' E., on random line, bet. secs. 17 and 20.

40.00 Set temp. ¼ sec. cor.

79.88 Intersect N. and S. line, 4 lks. N. of the cor. of secs. 16, 17, 20, and 21.

Survey: Subdivisional lines: T. 6 N., R. 1 W.

70

Chains	
	Thence
	N. 89°50' W., on true line, bet. secs. 17 and 20.
	Over mountainous land, thru scattering timber and medium undergrowth.
	Descend 45 ft. over NW. slope.
5.90	Gulch, course NW.; ascend 297 ft. over SE. slope.
16.50	Spur slopes NE.; crest of hill on spur, bears NE., 3.00 chs. dist.; descend 85 ft. over W. slope.
20.20	Head of drain, course N., ascend 80 ft. over NE. slope.
25.50	Short spur, slopes N.; crest of hill bears S., 2.50 chs. dist.; descend 235 ft. over NW. slope.
35.90	Wash, 25 lks. wide, course N.; thence, along N. slope to
39.94	Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \begin{array}{l} S 17 \\ S 20 \end{array}$
	1940
	No bearing trees available.
	Raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.
	Continue along N. slope.
50.50	Drain, course NE.; ascend 40 ft. over SE. slope.
54.90	Ridge, bears N. 20° E. and S. 20° W.; descend 45 ft. over NW. slope.
61.90	Gulch, course NW.; descend 30 ft. over NW. slope.
69.20	Gulch, course SW.; ascend gradually over SW. slope to
79.88	The cor. of secs. 17, 18, 19, and 20.
	Land, mountainous. Soil, volcanic ash, rocky, 3rd and 4th rates. Timber, palo verde, mesquite, ironwood, and catclaw. Undergrowth, greasewood, sage, palo verde, cacti, and ocotillo.
	N. 89°52' W., on random line, bet. secs. 18 and 19.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.05	Intersect W. bdy. of Tp., 4 lks. S. of cor. of secs. 13, 18, 19, and 24, which is an iron post, 2 ins. in diam., projecting 28 ins. above ground, firmly set in a mound of stone, and properly marked on brass cap. No accessories.
	Thence
	S. 89°50' E., on true line, bet. secs. 18 and 19.
	Over mountainous land, thru scattering timber and medium undergrowth.

Survey: Subdivisional lines: T. 6 N., R. 1 W.

BOOK 4238

71

Chains

- Descend 6 ft. over SE. slope.
- 0.25 Gulch, course SW.; ascend 218 ft. over NW. slope to ridge.
- 0.335 Intersect the NW. side line of the Pig Iron No. 8 lode, Mineral Survey No. 4155.
- From this point: cor. No. 2, identical with cor. No. 1 of the Pig Iron No. 14 lode, bears N. 56°22' E., 19.89 chs. dist.; an iron boulder 10x12x12 ins. above ground, firmly set in a mound of stone, and marked as described in the official record.
- Cor. No. 1, identical with cors. No. 1 of the Pig Iron lodes Nos. 3 and 4, bears S. 56°22' W., 2.84 chs. dist.; a schist stone 10x6x8 ins. above ground, firmly set in a mound of stone, and marked as described in the official record.
- Thence across patented mineral land.
- 20.00 Ridge, bears N. 20° E. and S. 20° W.; a low saddle, bears N. 20° E., 6.00 chs. dist.; the crest of a prominent hill, bears S. 20° W., 4.50 chs. dist.; descend 102 ft. over NE. slope.
- Thence across patented mineral land.
- 24.40 Gulch, course SE.; ascend 103 ft. over SW. slope.
- 30.30 Short spur, slopes S.; descend 80 ft. over broken SE. slope to a drain.
- 33.02 Intersect the SE. side line of the Pig Iron No. 13 lode, Mineral Survey No. 4155.
- From this point: cor. No. 3, identical with cor. No. 4 of the Pig Iron No. 20 lode, bears N. 56°22' E., 15.46 chs. dist.; an iron boulder 12x6x12 ins. above ground, firmly set, marked as described in the official record, and witnessed by a mound of stone SE.
- Cor. No. 4, identical with cor. No. 3 of the Pig Iron No. 9 lode, bears S. 56°22' W., 7.27 chs. dist.; a schist stone 8x4x12 ins. above ground, firmly set, marked as described in the official record, and witnessed by a mound of stone SE.
- Leave patented mineral land.
- 39.60 Drain, course S.; thence, along broken S. slope to
- 40.05 Set an iron post, $\frac{3}{4}$ ft. long, 1 in. in diam., 28 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
- $\frac{1}{4} \frac{S 18}{S 19}$
- 1940
- No bearing trees available.
- Raise a mound of stone, 2½ ft. base, 2 ft. high, N. of cor.
- Ascend gradually along S. slope.
- 70.80 Wash, 20 lks. wide, course S. 20° W.; ascend 17 ft. over SW. slope.
- 80.05 The cor. of secs. 17, 18, 19, and 20.
- Land, mountainous.
Soil, volcanic ash, rocky, 3rd and 4th rates.
Timber, palo verde, catclaw, ironwood, and mesquite.
Undergrowth, greasewood, sage, palo verde, cacti, mesquite, and ocotillo.

Chains	
	N. 0°02' W., bet. secs. 17. and 18..
	Over mountainous land, thru scattering timber and medium undergrowth.
	Ascend 80 ft. over SW. slope.
9.70	Short spur, slopes W.; thence, along broken W. slope.
26.20	Gulch, course SW.; ascend 105 ft. over broken SE. slope.
31.41	Intersect the SE. side line of the Pig Iron No. 25 lode, Mineral Survey No. 4155.
	From this point: Cor. No. 3, identical with cor. No. 4 of the Bessemer No. 3 lode, bears N. 56°22' E., 4.59 chs. dist.; a schist stone 14x6x8 ins. above ground, firmly set, marked as described in the official record, and witnessed by a mound of stone SE.
	Cor. No. 4, identical with cor. No. 3 of the Pig Iron No. 20 lode, bears S. 56°22' W., 18.14 chs. dist.; a schist stone 8x5x12 ins. above ground, firmly set, marked as described in the official record, and witnessed by a mound of stone SE.
	Thence across patented mineral land.
39.00	Gulch, course SE.; ascend 15 ft. over S. slope.
40.00	True point for $\frac{1}{4}$ sec. cor. falls on a sloping, rock outcrop where it is impracticable to monument cor., therefore establish witness cor., N. 0°02' W., 20 lks. dist., as hereinafter described.
40.20	Set an iron post, 3 ft. long, .1 in. in diam., 16 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for witness $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ S18' S17 .W C 1940
	No bearing trees available.
	Ascend 183 ft. over S. slope.
47.00	Spur, slopes SE.; thence, along E. slope.
52.80	Spur, slopes E.; descend 45 ft. over NE. slope.
55.00	Gulch (near head), course E.; ascend 65 ft. over SE. slope.
59.40	Ridge, bears NE. and SW.; descend 282 ft. over NW. slope to the sec. cor.
64.24	Intersect the NW. side line of the Bessemer No. 5 lode, Mineral Survey No. 4155.
	From this point: cor. No. 2, identical with cor. No. 1 of the Bessemer No. 8 lode, bears N: 56°22' E., 9.22 chs. dist.; an iron boulder 12x4x14 ins. above ground, firmly set in a mound of stone, marked as described in the official record, and witnessed by a mound of stone NW.
	Cor. No. 1, identical with cor. No. 2 of the Pig Iron No. 27 lode, bears S. 56°22' W., 13.51 chs. dist.; a schist stone 12x5x8 ins. above ground, firmly set, marked as described in the official record, and witnessed by a mound of stone NW.

Survey: Subdivisional lines: T. 6 N., R. 1 W.

BOOK 4233

73

Chains	Leave patented mineral land.						
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for cor. of secs. 7, 8, 17, and 18, with brass cap marked						
	<table border="1"> <tr> <td>T6N</td> <td>RLW</td> </tr> <tr> <td>S 7</td> <td>S 8</td> </tr> <tr> <td>S 18</td> <td>S 17</td> </tr> </table>	T6N	RLW	S 7	S 8	S 18	S 17
T6N	RLW						
S 7	S 8						
S 18	S 17						
	1940						
	No bearing trees available.						
	Land, mountainous.						
	Soil, volcanic ash, rocky, 3rd and 4th rates.						
	Timber, palo verde, mesquite; catclaw, and ironwood.						
	Undergrowth, greasewood, sage, palo verde, cacti, mesquite, and ocotillo.						
	S. 89°50' E., on a random line, bet. secs. 8 and 17.						
40.00	Set temp. $\frac{1}{4}$ sec. cor.						
80.00	Intersect N. and S. line, 5 lks. S. of the cor. of secs. 8, 9, 16, and 17.						
	Thence						
	N. 89°52' W.; on true line, bet. secs. 8 and 17.						
	Over mountainous land, thru scattering timber and medium undergrowth.						
	Ascend 50 ft. over NE. slope.						
5.20	Spur, slopes SE.; descend 35 ft. over SW. slope.						
11.00	Wash, 60 lks. wide; course SE.; ascend 30 ft. over NE. slope.						
17.50	Spur, slopes SE.; ascend 85 ft. over S. slope.						
23.58	Intersect the SE. side line of the Bessemer No. 21 lode, Mineral Survey No. 4155.						
	From this point: cor. No. 3, bears N. 56°22' E., 21.84 chs. dist.; a sandstone 14x4x8 ins. above ground, firmly set, marked as described in the official record, and witnessed by a mound of stone E.						
	Cor. No. 4, identical with cor. No. 2 of the Bessemer No. 15 lode, and cor. No. 3 of the Bessemer No. 16 lode, bears S. 56°22' W., 89 lks. dist.; an iron boulder 12x8x16 ins. above ground, firmly set in a mound of stone, and marked as described in the official record.						
	Thence across patented mineral land.						
24.00	Spur, slopes NE.; thence, along N. slope.						
29.00	Spur, slopes SE.; ascend 89 ft. along S. slope.						
31.40	Same spur, slopes NE.; descend 70 ft. over NW. slope.						
34.70	Gulch, course NE.; ascend 102 ft. over NE. slope to						
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked						
	<table border="1"> <tr> <td>$\frac{1}{4}$ S 8</td> </tr> <tr> <td>$\frac{1}{4}$ S 17</td> </tr> </table>	$\frac{1}{4}$ S 8	$\frac{1}{4}$ S 17				
$\frac{1}{4}$ S 8							
$\frac{1}{4}$ S 17							
	1940						

Survey: Subdivisional lines: T. 6 N., R. 1 W.

74

Chains	No bearing trees available. Raise a mound of stone, 3 ft. base, 2½ ft. high, N. of cor. Ascend 67 ft. over NE. slope
42.50	Spur, slopes SE.; descend 103 ft. over SW. slope.
47.90	Draw (near head), course SE.; thence, along S. slope.
50.50	Saddle in spur, slopes NE.; ascend 92 ft. along broken N. slope.
56.37	Intersect the NW. side line of the Bessemer No. 8 lode, Mineral Survey No. 4155. From this point: cor. No. 2, identical with cor. No. 1 of the Bessemer No. 17 lode, bears N. 56°22' E., 3.60 chs. dist.; a schist stone 14x4x14 ins. above ground, firmly set in a mound of stone, and marked as described in the official record. Cor. No. 1, identical with cor. No. 2 of the Bessemer No. 5 lode, hereinbefore described, bears S. 56°22' W., 19.13 chs. dist. Leave patented mineral land.
59.40	Spur, slopes N.; descend 110 ft. over NW. slope.
63.50	Gulch, course N.; thence, along broken N. slope.
78.50	Short spur, slopes N.; descend 8 ft. over NW. slope.
80.00	The cor. of secs. 7, 8, 17, and 18. Land, mountainous. Soil, volcanic ash, rocky, 3rd and 4th rates. Timber, palo verde, catclaw, mesquite, and ironwood. Undergrowth, greasewood, sage, palo verde, cacti, and ocotillo.
	N. 89°50' W., on random line, bet. secs. 7 and 18.
40.00	Set temp. ¼ sec. cor.
80.00	Intersect W. bdy. of Tp., 3 lks. S. of cor. of secs. 7, 12, 13, and 18, which is an iron post, 2 ins. in diam., projecting 8 ins. above ground, firmly set, properly marked on brass cap, and witnessed by a mound of stone W. Thence S. 89°49' E., on true line, bet. secs. 7 and 18. Over mountainous land, thru scattering timber and medium undergrowth. Descend 5 ft. over E. slope.
0.25	Drain, course S. 30° E.; ascend 45 ft. over SW. slope.
6.00	Spur, slopes S.; descend 134 ft. over broken E. slope.
22.50	Wash, 20 lks. wide, course SE.; thence, along broken S. slope.
30.00	Gulch, course S.; continue along broken S. slope.
39.95	Drain, course S.; ascend slightly to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in ground to bedrock over a cross (+) chiseled thereon,

Survey: Subdivisional lines: T. 6 N., R. 1 W.

BOOK 4280

75

Chains	
	and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S 7.}{S 18}$
	1940
	No bearing trees available.
	Ascend 40 ft. over SW. slope.
50.90	Spur, slopes S.; descend 50 ft. over SE. slope.
55.00	Gulch, course S.; ascend 40 ft. over SW. slope.
60.80	Ridge, bears NW. and SE.; descend 65 ft. over E. slope.
65.00	Road, bears NE. and SW.
66.50	Gulch, course N. 70° E.; thence, along broken N. slope.
76.50	Short spur, slopes NE.; descend 28 ft. over E. slope.
77.90	Gulch, course NE.; ascend 8 ft. over NW. slope to
80.00	The cor. of secs. 7, 8, 17, and 18.
	Land, mountainous. Soil, volcanic ash, rocky, 3rd and 4th rates. Timber, palo verde, catclaw, mesquite, and ironwood. Undergrowth, greasewood, sage, palo verde, cacti, mesquite, and ocotillo.
	N. 0°02' W., bet. secs. 7 and 8.
	Over mountainous land, thru scattering timber and medium undergrowth. Descend 25 ft. over NW. slope.
1.80	Gulch, course N. 60° E.; ascend 35 ft. over S. slope.
4.80	Spur, slopes E.; descend 20 ft. over NE. slope.
6.10	Road, bears N. 60° E. and S. 60° W.
6.80	Drain, course E.; thence, along broken E. slope.
16.70	Gulch, course SE.; continue along broken E. slope.
29.00	Gulch, course SE.; ascend 90 ft. over SW. slope.
38.40	Spur, slopes SE.; thence, along broken E. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$
	$S 7 \quad \quad S 8$
	1940
	No bearing trees available.
	Raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.
	Continue along broken E. slope.

Survey: Subdivisional lines: T. 6 N., R. 1 W.

76

Chains							
45.50	Ridge, bears E. and W.; descend 55 ft. over NE. slope.						
48.00	Gulch, course NE.; ascend 30 ft. over SE. slope.						
50.70	Short spur, slopes E.; descend 60 ft. over N. slope.						
57.00	Gulch, course NE.; ascend 25 ft. over SE. slope.						
59.50	Spur, slopes NE.; descend 145 ft. over N. slope.						
68.50	Wash, 60 lks. wide, course E.; ascend 95 ft. over SW. slope.						
72.70	Spur, slopes S. 30° E.; descend 35 ft. over NE. slope.						
78.40	Gulch, course E.; ascend 25 ft. over SE. slope.						
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 16 ins. in ground to bedrock over a cross (+) chiseled thereon, and in a mound of stone to top, for cor. of secs. 5, 6, 7, and 8, with brass cap marked						
	<table border="1"> <tbody> <tr> <td>T6N</td> <td>RLW</td> </tr> <tr> <td>S 6</td> <td>S 5</td> </tr> <tr> <td>S 7</td> <td>S 8</td> </tr> </tbody> </table>	T6N	RLW	S 6	S 5	S 7	S 8
T6N	RLW						
S 6	S 5						
S 7	S 8						
	1940						
	from which						
	An ironwood, 5 ins. in diam., bears N. 82° E., 38 lks. dist., marked T6N RLW S5 BT.						
	An ironwood, 5 ins. in diam., bears S. 19½° W., 118 lks. dist., marked T6N RLW S7 BT.						
	Land, mountainous.						
	Soil, volcanic ash, rocky, 3rd and 4th rates.						
	Timber, palo verde, mesquite, catclaw, and ironwood.						
	Undergrowth, greasewood, sage, cacti, palo verde, and occitillo.						
	S. 89°52' E., on random line, bet. secs. 5 and 8.						
40.00	Set temp. ¼ sec. cor.						
79.98	Intersect the cor. of secs. 4, 5, 8, and 9.						
	Thence						
	N. 89°52' W., on true line bet. secs. 5 and 8.						
	Over mountainous land, thru scattering timber and medium undergrowth.						
	Ascend 30 ft. over NE. slope.						
11.40	Spur, slopes SE.; descend 50 ft. over broken SW. slope.						
23.80	Enter Morgan City Wash, 3.00 chs. wide, course S. 70° E.; thence, across bed of wash.						
30.00	Road in bed of wash, bears N. 70° W. and S. 70° E.						
36.90	Leave Morgan City Wash; thence, along N. slope to						
39.99	Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, for ¼ sec. cor., with brass cap marked						

Survey: Subdivisional lines: T. 6 N., R. 1 W.

BOOK 933

77

Chains

$\frac{1}{4} \frac{S 5}{S 8}$

1940

from which

A mesquite, 5 ins. in diam., bears N. $63\frac{1}{2}^{\circ}$ W., 202 lks. dist., marked $\frac{1}{4}$ S5 BT.

A mesquite, 10 ins. diam., bears S. 54° W., 104 lks. dist., marked $\frac{1}{4}$ S8 BT.

Continue along N. slope.

50.70 Wash, 60 lks. wide, course N. 60° E.; ascend 110 ft. over SE. slope.

70.00 Top of ascent; descend 25 ft. over SW. slope.

72.20 Gulch (near head), course SE.; ascend 75 ft. over broken SE. slope to

79.98 The cor. of secs. 5, 6, 7, and 8.

Land, mountainous.

Soil, volcanic ash, rocky, 3rd and 4th rates.

Timber, mesquite, catclaw, palo verde, and ironwood.

Undergrowth, greasewood, mesquite, catclaw, sage, palo verde, cacti, and ocotillo.

N. $89^{\circ}49'$ W., on random line, bet. secs. 6 and 7.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.92 Intersect W. bdy. of Tp., 14 lks. S. of cor. of secs. 1, 6, 7, and 12, which is an iron post, 2 ins. in diam., projecting 10 ins. above ground, firmly set, properly marked on brass cap, and witnessed by a mound of stone W.

Thence

S. $89^{\circ}43'$ E., on true line, bet. secs. 6 and 7.

Over mountainous land, thru scattering timber and medium undergrowth.

Ascend 70 ft. over SW. slope.

4.40 Spur, slopes S.; descend 60 ft. over SE. slope.

8.10 Wash, 20 lks. wide, course SE.; ascend 30 ft. over SW. slope

16.90 Spur, slopes S.; thence, along broken S. slope.

30.90 Spur, slopes S. 20° E.; descend 66 ft. over broken SE. slope.

39.85 Drain, course S. 20° E.

39.92 Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in ground to bedrock with a stone $3 \times 4 \times 4$ ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4} \frac{S 6}{S 7}$

1940

Survey: Subdivisional lines: T. 6 N., R. 1 W.

78

Chains	
	No bearing trees available.
	Ascend 30 ft. over SW. slope.
42.10	Short spur, slopes S.; descend 50 ft. over SE. slope.
51.20	Wash, 10 lks. wide, course S. 20° E.; ascend 35 ft. over SW. slope.
54.90	Short spur, slopes S. 30° E.; descend 108 ft. over broken SE. slope.
69.30	Wash, 20 lks. wide, course N. 60° E.; ascend 90 ft. over NW. slope.
78.70	Broken spur, slopes NE.; descend 8 ft. over SE. slope to
79.92	The cor. of secs. 5, 6, 7, and 8.
	Land; mountainous. Soil, volcanic ash, rocky, 3rd and 4th rates. Timber, mesquite, palo verde, catclaw, and ironwood. Undergrowth, greasewood, sage, palo verde, mesquite, cacti, and ocotillo.
	N. 0°02' W., bet. secs. 5 and 6.
	Over mountainous land, thru scattering timber and medium undergrowth.
	Ascend slightly over SE. slope.
0.30	Spur, slopes N. 60° E.; descend 110 ft. over N. slope.
6.80	Wash, 20 lks. wide, course E.; ascend 45 ft. over S. slope.
8.70	Short spur, slopes S. 60° E.; descend 40 ft. over NE. slope.
11.20	Gulch, course SE.; ascend 70 ft. over SW. slope.
18.60	Spur, slopes E.; descend 58 ft. over N. slope.
23.20	Gulch, course E.; ascend 45 ft. over S. slope.
26.20	Short spur, slopes E.; descend 70 ft. over NE. slope.
29.40	Wash, 25 lks. wide, course SE.; ascend 60 ft. over SE. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\begin{array}{c} \frac{1}{4} \\ S\ 6 \quad \quad S\ 5 \\ 1940 \end{array}$
	No bearing trees available.
	Raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.
	Ascend 29 ft. over SE. slope.
51.60	Spur, slopes E.; descend 60 ft. over broken NE. slope.

Survey: Subdivisional lines: T. 6 N., R. 1 W.

BOOK 4288

79

Chains

64.30 Morgan City Wash, 2.50 chs. wide, course S. 30° E. from N. 45° W.; road in bed of wash, bears N. 45° W. and S. 30° E.; thence, along E. slope.

70.00 Gulch, course S. 30° E.; ascend 55 ft. over broken SW. slope to

76.08' Intersect N. bdy. of Tp. at a point, West, 7.76 chs. from the cor. of secs. 31 and 32, T. 7 N., R. 1 W., hereinbefore described.

At point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in ground, for closing cor. of secs. 5 and 6, with brass cap marked

T7N R1W	
S31	
S 6	S 5
T6N	R1W
C C	
1940	

No bearing trees available.

Raise a mound of stone, 3 ft. base, 2½ ft. high, S. of cor.

Land, mountainous.

Soil, volcanic ash, rocky, 3rd and 4th rates.

Timber, mesquite, catclaw, palo verde, and ironwood.

Undergrowth, greasewood, sage, palo verde, mesquite, cacti, catclaw, and ocotillo.

GENERAL DESCRIPTION

This Tp., excepting parts of secs. 30, 31, and 32, lies in the low, broken Hieroglyphic Mountain Range. The lands are desert in character, and vary between 2200 and 3000 ft. above sea level, in elevation. The main ridge of the mountains enters the W. bdy. of sec. 7, and bears southeasterly thru secs. 7, 18, 17, 20, 29, and 28, and emerges from the Tp. thru the S. bdy. of sec. 33. Several washes of varying size, flowing southwesterly, drain the area west of the ridge. The area east of the ridge drains in a southeasterly direction. The principal drain, known as the Morgan City Wash, enters the N. bdy. of sec. 6, runs southeasterly, and leaves the Tp. thru the E. bdy. of sec. 24. There are two dug wells in sec. 9, another well in secs. 23, and a spring in sec. 13. These watering places are all located in or near the Morgan City Wash, and are said to contain water the year around.

The soil in the Tp. is principally volcanic ash, 3rd and 4th rate. It is, for the most part, very shallow, and quite rocky. It produces a medium stand of native grasses during seasons of normal precipitation.

The vegetation consists of scattering palo verde, catclaw, mesquite, and ironwood timber, and medium greasewood, sage, palo verde, mesquite, cactus, and ocotillo, undergrowth.

Mineralization is evident throughout the entire Tp., but is particularly centered in secs. 6, 8, 17, 18, and 19. Approximately 500 acres of mineral lands have been patented in those secs. The mines in sec. 6 have been worked extensively in past years, but are abandoned at the present time. The remaining properties have never

been developed.

There is one settler located in the Tp. His improvements consist of a dwelling house, stable, two sheds, a well, windmill, water tank, and several woven wire and timber enclosures, all located in the NW $\frac{1}{4}$ NW $\frac{1}{4}$ of sec. 9. He is engaged in goat raising and has no land under cultivation. An unoccupied ranch is located in sec. 23. Improvements there consist of a well, two goat sheds, and two small board and canvas shelters. The only other improvements found in the Tp. are a vacant cabin and shed located on the north bank of Morgan City Wash in secs. 22 and 23.

Other than mining, stock grazing appears to be the only industry for which the Tp. is suited.

The bed of Morgan City Wash is used as a road throughout the Tp., and a network of unimproved roads lends access to nearly all parts of the Tp.

FINAL FIELD TEST OF INSTRUMENT

January 21, 1940: at camp in SW $\frac{1}{4}$ SE $\frac{1}{4}$ of sec. 23, T. 6 N., R. 1 W., Gila and Salt River Meridian, Arizona, in latitude 33°50'30" N., and longitude 112°20' W., examine the adjustments of Gurley transit No. 371537 and find no errors. Then, using the reference point determined at this station by Polaris observation on December 6, 1939, as described at the beginning of these field notes, test the solar apparatus of this instrument as follows:

At 9h. 00m., a.m., app. t., set off 33°50'30" N. on the latitude arc; 20°01' S. on the declination arc; and determine a meridian with the solar, which agrees with the true meridian.

At app. noon, with the latitude arc unchanged; observe the sun on the meridian, and obtain a reading of 20°00' S. on the declination arc, which agrees with the computed declination of the sun.

At 3h. 00m., p.m., app. t., with the latitude arc unchanged; set off 19°57 $\frac{1}{2}$ ' S. on the declination arc, and determine a meridian with the solar, which agrees with the true meridian.

As all of the solar observations made during the usual hours of solar work come within 1'30" of the true meridian, conclude that this instrument is in satisfactory adjustment on this date, and has remained in such condition thruout the surveys described in the foregoing field notes.

UNITED STATES
DEPARTMENT OF THE INTERIOR
GENERAL LAND OFFICE

FIELD ASSISTANTS

to

Raymond F. Moss

Public Land Surveyor

NAMES	CAPACITY
Benjamin J. Mollette	Principal Assistant
Leroy Lewis	Chainman
Clifford Cline	Cornerman
Clifford Jones	Axman
Roy M. Clifton	Axman
George B. McDevitt	Flagman

CERTIFICATE OF SURVEYOR

I, Raymond F. Moss, Public Land Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 13th day of July 1939 received from the district cadastral engineer for Arizona, with assignment instructions dated November 22, 1939, I have resurveyed the Gila and Salt River Meridian, East of T. 6 N., R. 1 W., and North Boundary of T. 6 N., R. 1 W., and surveyed the Subdivision Lines of
Township No. 6 North, Range No. 1 West
of the Gila & Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said ~~survey~~ ^{resurveys and} ~~has~~ been made in strict conformity with said instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.
Phoenix, Arizona
September 27, 1941.

Raymond F. Moss
Public Land Surveyor

CERTIFICATE OF APPROVAL

OFFICE OF SUPERVISOR OF SURVEYS,
Denver, Colorado, December 29, 1941.

The foregoing field notes of the resurvey of the Gila and Salt River Meridian, East of T. 6 N., R. 1 W., and North Boundary of T. 6 N., R. 1 W., and survey of the Subdivision Lines of Township 6 North, Range 1 West of the Gila and Salt River Meridian, in the State of Arizona executed by Raymond F. Moss, Public Land Surveyor, under special instructions dated July 13, 1939 for Group 228, Arizona, and assignment instructions dated November 22, 1939, having been critically examined, and the necessary corrections made prior to their certification by the engineer, the said field notes, and the ^{resurveys and} ~~survey~~ therein described, are hereby approved.

Donald J. Simon
Supervisor of Surveys.

CERTIFICATE OF TRANSCRIPT

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~
~~is a true copy of the original field notes on file in the public survey office.~~

Supervisor of Surveys.