

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GENERAL LAND OFFICE

Book F

BOOK 4328

FIELD NOTES

OF THE

Resurvey of a Portion of the East Boundary,

Survey of the West Boundary,

and

Survey of the Subdivisional Lines of

Township 6 North, Range 5 West

4328

Of the Gila and Salt River Meridian,

In the State of Arizona

EXECUTED BY

Raymond F. Moss

Public Land Surveyor.

General Land Office

Under special instructions dated July 13, 1939, which provided for the surveys included under Group No. 228, Arizona bearing the approval of the Commissioner of the General Land Office under date of August 23, 1939 and assignment instructions dated November 22, 1939

Survey commenced January 25, 1940

Survey completed April 2, 1940

1A

BOOK 4328

# INDEX DIAGRAM.

36

		Township 6 North				Range 5 West						
		59	45	34	25	16						
7	59	59	45	34	35	25	16	16				
	6	59	5	44	4	3	24	2	1			
	57	58	57	56	43	33	33	32	24	23	15	15
6	7	56	8	42	9	32	10	23	11	14	12	
	55	54	41	31	30	22	21	22	21	13		
5	18	53	17	40	16	30	15	21	14	12	13	
	52	52	51	39	29	20	11	12				
4	19	51	20	38	21	28	22	20	23	11	24	
	49	50	49	37	28	27	19	19	19	10	11	
4	80	48	29	37	28	27	27	18	26	10	25	
	3	47	46	36	36	26	26	18	17	9	9	
3	81	45	32	35	33	26	34	17	35	8	36	
	2					25		16				

## Township 6 North, Range 5 West.

4328

## Chains

The surveys and resurveys herein described were executed with Gurley solar transit No. 371537. The instrument is equipped with a Smith solar attachment and otherwise conforms to the standard requirements of the General Land Office. For test of this instrument, refer to the final test described in the field notes of the resurvey of the boundaries and survey of the subdivision of T. 6 N., R. 1 W., concurrently surveyed under this group.

The directions of all the lines of survey herein described were determined by the solar method.

All measurements were made with a Lallie steel tape, 5 chains in length, graduated every link for the first 100 links, and the remainder at intervals of 10 links. The tape was tested by comparison with a Lufkin standard steel tape and found correct. All measurements were made on the slope, the vertical angle of each interval determined with a clinometer in good adjustment, and the horizontal equivalents entered in the field notes.

-----  
Resurvey of Portion of E. Bdy. of T. 6 N., R. 5 E.

-----  
Reestablishment of the survey executed by R.J. Gill in 1916.

-----  
Preliminary to the resurvey, the lines of the original survey are retraced. The cor. of sections 13, 18, 19 and 24, Ts. 6 N., Rs. 4 and 5 W. is reestablished at proportionate position based on the record of the original survey. The retracement data are thoroughly verified and only the true line notes are given here.

-----  
From the  $\frac{1}{4}$  sec. cor. of secs. 19 and 24, as evidenced by an iron post, 1 in. diam., set, marked and witnessed as described in the official record.

North, bet. secs. 19 and 24.

Over rolling land, through scattering timber and undergrowth.

5.00 Road, bears N. 10° W. and S. 10° E.

25.00 Wash, 60 lks. wide, course S. 30° E.

39.50 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, ~~for~~ witness corner of secs. 13, 18, 19 and 24, with brass cap marked

WC  
T6N  
R5W | R4W  
S13 | S18  
S24 | S19

1940

raise a mound  
of stone, 4 ft. base, 2 ft. high, W. of cor.

40.00 Proportional distance,

The cor. of secs. 13, 18, 19 and 24, falls in a wash, 50 lks. wide, course SW., where it is impracticable to monument the corner.

Thence

North, bet. secs. 13 and 18.

## Resurvey of Portion of E. Bdy. of T. 6 N., R. 5 W.

Chains	
31.35	Wash, 30 lks. wide, course E.
40.00	The $\frac{1}{4}$ sec. cor. of secs. 13 and 18 as evidenced by an iron post, 1 in. diam., set, marked and witnessed as described in the official record.
	Land, rolling. Soil, rocky, 4th rate. Timber, palo verde; undergrowth, cats claw.
-----	
Survey of the West Bdy. of T. 6 N., R. 5 W.	
The cor. of Ts. 5 and 6 N., Rs. 5 and 6 W., is evidenced by an iron post, 3 ins. diam., firmly set, marked and witnessed as described in the official record.	
Thence	
North, bet. secs. 31 and 36.	
Over slightly rolling land, through scattering undergrowth.	
21.00	Drain, course SE.
25.30	Highway, Buckeye to Wickenburg, bears N. $39\frac{1}{2}^{\circ}$ E. and S. $39\frac{1}{2}^{\circ}$ W.
29.00	NW. cor. of house, 20x15 ft., on line.
30.07	Intersect SW. side line (3-4) of the Hamilton patented lode mining claim, Min. Sur. No. 2511 at 65 lks. S. $79^{\circ} 40'$ E. of cor. No. 4 thereof, identical with cor. No. 2 of Talmadge and cor. No. 2 of Conkling, which is a pine post, 4 ft. sq., 20 ins. above ground, marked and witnessed as described in the official record. Across patented mineral land.
31.70	Road, Vulture mine to Wickenburg, bears NW. and SE.
35.60	Right bank of wash, bears N. $25^{\circ}$ W. and S. $25^{\circ}$ E.
38.00	Left bank of wash, bears N. $25^{\circ}$ W. and S. $25^{\circ}$ E.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$
	S36 S31
	1940
	from which
	An ironwood, 8 ins. diam., bears S. $11\frac{1}{4}^{\circ}$ E., 169 lks. dist., marked $\frac{1}{4}$ S31 BT.
	An ironwood, 8 ins. diam., bears N. $73\frac{1}{2}^{\circ}$ W., 185 lks. dist., marked $\frac{1}{4}$ S36 BT.
46.95	Three inch water pipe line, bears N. $60^{\circ}$ E. and S. $60^{\circ}$ W.
47.20	Road, bears N. $60^{\circ}$ E. and S. $60^{\circ}$ W.
48.55	Intersect NE. side line (3-4) of the Astor patented lode mining claim, Min. Sur. No. 2511 at point 2.66 chs. N. $79^{\circ} 40'$ W. of cor. No. 4 thereof, identical with cor. No. 4 of Vulture Extension, Min. Sur. No. 3146, pat., which is a pine post, 4 ft. long, 4 ins. sq., marked and witnessed as described in the official record. Leave patented mineral land.

Survey of the West Bdy. of T. 6 N., R. 5 W.

Chains									
48.57	U.S.L.M. No. 2511 bears N.54°29'W.								
50.50	Wash, 8 lks. wide, course S.25°E.								
66.20	U.S.L.M. No. 2511 bears S.63°14'W.								
66.95	Intersect SW. side line (1-2) of the Thomas Fraction, surveyed but unpatented lode mining claim, Min. Sur. No. 4147 at 2.09 chs. N.79°44½'W. of Cor. No. 1 thereof, which is a ¾ inch galvanized iron pipe 20 ins. above ground, marked and witnessed as described in the official record.								
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, at cor. of secs. 25,30,31 and 36, with brass cap marked								
	<table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2" style="text-align: center;">T6N</td></tr> <tr><td style="text-align: center;">R6W</td><td style="text-align: center;">R5W</td></tr> <tr><td style="text-align: center;">S25</td><td style="text-align: center;">S30</td></tr> <tr><td style="text-align: center;">S36</td><td style="text-align: center;">S31</td></tr> </table>	T6N		R6W	R5W	S25	S30	S36	S31
T6N									
R6W	R5W								
S25	S30								
S36	S31								
	1940								
	from which								
	An ironwood, 5 ins. diam., bears N.21¼°E., 71 lks. dist., marked T 6 N R 5 W S 30 B T.								
	An ironwood, 8 ins. diam., bears N.65½°W., 126 lks. dist., marked T 6 N R 6 W S 25 B T.								
	U.S.L.M. No.2511 bears S.34°26'W., 25.58 chs.								
	Land, rolling.								
	Soil, lava and gravelly, 3rd rate.								
	Timber, ironwood, palo verde, mesquite and sahuaro.								
	Undergrowth, ocotillo and cactus.								
	-----								
	North, bet. secs. 25 and 30:								
	Over rolling land, through scattering timber and undergrowth.								
	Across surveyed but unpatented mineral land.								
4.30	Road, bears N.20°W. and S.20°E.								
14.60	Wash, 15 lks. wide, course S.30°W.								
16.88	Intersect NE. side line (3-4) of Vulture North Extension No. 13, Min. Sur. No. 4147, at 4.35 chs. N.88°02'W. of Cor. No. 4, thereof, which is a ¾ inch galvanized iron pipe, 20 ins. above ground, marked and witnessed as described in the official record. Cor. No. 3, which is the center of a mound of stone and earth, accepted as the cor., bears N.88°02'W., 18.35 chs. dist. Leave surveyed but unpatented land.								
24.10	Same wash as at 14.60 chs., course S.30°E.								
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at ¼ sec. cor., with brass cap marked								
	¼								
	S25 S30								
	1940								
	from which								

4.

Survey of the West Bdy. of T. 6 N., R. 5 W.

Chains	<p>An ironwood, 6 ins. diam., bears S.79½°W., 71 lks. dist., marked ¼ S 25 B T.</p> <p>No other bearing tree available; raise a mound of stone 4 ft. base, 2 ft. high, W. of cor.</p>
66.70	Rocky wash, 1 ch. wide, course S.30°E.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in the ground over a cross (+) marked on bedrock, and in a mound of stone to top, at cor. of secs. 19,24,25 and 30, with brass cap marked
	<p>T6N R6W R5W S24 S19 S25 S30</p> <p>1940</p>
	<p>Land, rolling. Soil, rocky, 4th rate. Timber, ironwood, mesquite and sahuaro; undergrowth, cactus and scrub palo verde.</p> <hr style="border-top: 1px dashed black;"/>
	<p>North, bet. secs. 19 and 24.</p> <p>Over rolling land, through scattering undergrowth.</p>
5.00	Telephone line, bears NE. and SW.
28.90	Road, bears NE. and SW.
30.00	Leave rolling, enter mountainous land, bears E. and W.; asc. gradual SW. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bedrock, with cross chiseled in same, and in a mound of stone to top, at ¼ sec. cor., with brass cap marked
	<p>¼ S24 S19.</p> <p>1940</p>
	Asc. gradual SW. slope.
42.50	Short spur, slopes W.; desc. gradual NW. slope.
51.00	Old road, bears NE. and SW.
56.50	Wash, course SW.; asc. gradual SW. slope.
58.80	Bend in draw from NE. course SE.
65.00	Draw, course SE.; asc. 75 ft. over broken SW. slope.
75.00	Spur, slopes SE.; desc. 15 ft. over NE. slope.
77.80	Head of draw, course SE.; asc. 20 ft. over SE. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground to bedrock, in which cut a cross (+) and in a mound of stone to top, at cor. of secs. 13,18, 19 and 24, with brass cap marked

## Survey of the West Bdy. of T. 6 N., R. 5 W.

4823

Chains

T6N  
R6W R5W  
S13 | S18  
S24 | S19

1940

Land, S. 30 chs. rolling; remainder mountainous.  
Soil, rocky, 4th rate.

Timber, none; undergrowth, greasewood, palo verde, cactus,  
sahuaro.

-----  
North, bet. secs. 13 and 18.

Over mountainous land, through scattering undergrowth.

Asc. gradual SE. slope.

- 2.70 Spur, slopes SW.; desc. gradual NW. slope.
- 4.00 Head of draw, drains west; asc. gradual SW. slope.
- 6.30 Short spur, slopes W.; along broken W. slope.
- 15.80 Ridge, bears NW. and SE.; desc. 50 ft. over NE. slope.
- 18.30 Draw, drains E.; asc. 45 ft. over SE. slope.
- 22.00 Short spur, slopes SE.; desc. 55 ft. over NE. slope.
- 30.00 Enter wash, 50 lks. wide, course SE. from N.
- 35.50 Leave wash, from NE.
- 39.70 Same wash, course SE.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the  
ground, at  $\frac{1}{4}$  sec. cor., with brass cap marked

 $\frac{1}{4}$ 

S13 | S18

1940

raise a mound  
of stone 3 ft. base, 2 $\frac{1}{2}$  ft. high, W. of cor.

- 43.80 Wash, 30 lks. wide, course SW.; 1 ch. to junction with  
wash from NW.
- 49.60 Road on sharp spur sloping SE. bears N.14°W. to Wicken-  
burg and S.1 $\frac{3}{4}$ °E. to Vulture mine.
- 55.20 Wash, 15 lks. wide, course S.20°E.; asc. along broken SW.  
slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in the  
ground over a cross (+) marked on bedrock, and in a mound  
of stone to top, at cor. of secs. 7, 12, 13 and 18, with  
brass cap marked

T6N  
R6W R5W  
S12 | S 7  
S13 | S18

1940

## 6. BOOK 4328

Survey of the West Bdy. of T. 6 N., R. 5 W.

Chains	Land, rolling. Soil, rocky, 4th rate. Timber, ironwood, sahuaro, mesquite and palo verde. Undergrowth, sage, greasewood, cactus and scrub palo verde.
	-----
	North, bet. secs. 7 and 12.
	Over rolling land, through scattering timber and undergrowth.
1.00	Spur, slopes SE.; along E. slope.
6.20	Draw, course SE.
12.00	Wash, 15 lks. wide, course SE.; asc. over broken S. slope.
20.20	Main road, bears NE. and SW.
33.30	Spur, slopes SE.; along east slope.
36.80	Spur, slopes E.; desc. 40 ft. over NE. slope.
39.00	Draw, drains S.30°E.; asc. 10 ft. over broken S. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ S12   S 7 1940 raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.
	Desc. slightly over NE. slope.
41.00	Drain, course S.30°E.; asc. 35 ft. over broken S. slope.
46.00	Spur, slopes S.30°E.; along level east slope.
59.50	Same spur, slopes SW.; desc. 40 ft. over N. slope.
61.30	Gulch, course S.60°W.; asc. 90 ft. over S. slope.
70.70	Ridge, bears N.60°W. and SE.; desc. 130 ft. over N. slope.
78.60	Wash, 20 lks. wide, course SE.; over gradual S. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, at cor. of secs. 1,6,7 and 12, with brass cap marked
	T6N R6W R5W S 1   S 6 S12   S 7 1940 raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.
	Land, rolling. Soil, rocky, 4th rate. Timber, none; undergrowth, greasewood, sage, cactus and scrub palo verde.
	-----



Survey of West Bdy. of T. 6 N., R. 5 W.

4328

Chains	<p>North, bet. secs. 1 and 6.</p> <p>Over rolling land, through scattering undergrowth.</p> <p>Asc. gradual S. slope.</p> <p>.0.70 Road, bears NW. and SE. in wash SE.</p> <p>29.80 Head of wash, course S.20°E.; asc. 65 ft. over SW. slope.</p> <p>34.30 Sharp spur, slopes S.30°E.; along E. slope.</p> <p>35.50 Same spur in saddle, slopes SW.; asc. 50 ft. over SW. slope.</p> <p>39.70 Short spur, slopes W.; along level W. slope.</p> <p>40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at <math>\frac{1}{4}</math> sec. cor., with brass cap marked</p> <p style="text-align: center;"><math>\frac{1}{4}</math></p> <p style="text-align: center;">S1 S6</p> <p style="text-align: center;">1940</p> <p style="text-align: center;">raise a mound of stone, 3 ft. base, 2<math>\frac{1}{2}</math> ft. high, W. of cor.</p> <p>40.50 Spur, in saddle, slopes SW.; desc. 50 ft. over NW. slope.</p> <p>49.20 Gulch, course SW.; asc. 75 ft. over SE. slope.</p> <p>55.50 Spur, slopes SW.; along broken W. slope.</p> <p>67.50 Same spur, slopes S.15°E.; asc. 35 ft. along E. slope.</p> <p>71.50 Spur, slopes E.; desc. 75 ft. over NE. slope.</p> <p>74.50 Shallow wash, 10 lks. wide, course SE.</p> <p>80.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at cor. of lots 1 and 2, sec. 6 and lots 1 and 8, sec. 1, with brass cap marked</p> <p style="text-align: center;">S1 <math>\frac{1}{8}</math>   <math>\frac{1}{2}</math> S6</p> <p style="text-align: center;">1940</p> <p style="text-align: center;">raise a mound of stone, 3 ft. base, 2<math>\frac{1}{2}</math> ft. high, W. of cor.</p> <p>85.95 Intersect the S. bdy. of T.7 N., R.6 W.</p> <p>Set an iron post, 3 ft. long, 3 ins. diam., 28 ins. in the ground, at closing corner of Ts.6 N., Rs.5 and 6 W., with brass cap marked</p> <p style="text-align: center;">T7N R6W S36 S1   S6 R6W   R5W T6N CC</p> <p style="text-align: center;">1940</p> <p style="text-align: center;">raise a mound of stone, 4 ft. base, 3 ft. high, S. of cor.</p> <p>From point of intersection the SE. cor. of T.7 N.,</p>
--------	---

Survey of West Bdy. of T. 6 N.; R. 5 W.

Chains

R.6 W., bears S.89°59'E., 22.00 chs. dist., as evidenced by an iron post, 2 ins. diam., set, marked and witnessed as described in the official record.

From the same point, the 1/4 sec. cor. of sec. 36 on the S. bdy. of T.7 N., R.6 W., bears N.89°59'W., 17.78 chs. dist., as evidenced by an iron post, 1 in. diam., set, marked and witnessed as described in the official record.

Land, rolling.

Soil, rocky, 4th rate.

Timber, palo verde and ironwood; undergrowth, greasewood and cactus.

-----  
Subdivision of T. 6 N., R. 5 W.  
-----

From cor. of secs. 1,2,35 and 36, on S. bdy. of Tp., as evidenced by an iron post, 3 ins. diam., firmly set, marked and witnessed as described in the official record.


N.0°01'W., bet. secs. 35 and 36.

Over mountainous land, through scattering timber and undergrowth.

Asc. 228 ft. over SW. slope.

13.50 Top of hill; desc. 331 ft. over NE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at 1/4 sec. cor., with brass cap marked



.1940

raise a mound of stone, 3 ft. base, 2 1/2 ft. high, W. of cor.

Desc. gradual NE. slope.


41.70 Drain, course NE.; continue desc. 46 ft. over NE. slope.

51.00 Leave mountainous land, bears NW. and SE.; thence over level land.

56.10 Drain, course SE.

63.50 Wash, .25 lks. wide, course SE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, at cor. of secs. 25,26,35 and 36, with brass cap marked



1940

raise a mound of stone, 3 ft. base, 2 1/2 ft. high, W. of cor.

Land, mountainous and level.

Soil, rocky, 4th rate.

Timber, ironwood, mesquite and sahuaro; undergrowth, sage, greasewood, ocotillo and cactus.

Chains	S.89°59'E., on a random line bet. secs. 25 and 36.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.16	Intersect E. bdy. of Tp., at 5 lks. S. of cor. of secs. 25, 30, 31 and 36, as evidenced by an iron post, 3 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap properly marked and witnessed as described in the official record.
	Thence
	S.89°59'W., on true line bet. secs. 25 and 36.
	Over level land, through scattering timber and undergrowth.
4.85	Road, bears NW. and SE.
13.95	Wash, 30 lks. wide, course S.
20.15	Drain, course S.
27.05	Wash, 10 lks. wide, course S.
40.08	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ $\frac{S\ 25}{S\ 36}$
	1940
	from which
	An ironwood, 6 ins. diam., bears N.32°E., 307 lks. dist., marked $\frac{1}{4}$ S 25 B T.
	A cats-claw, 5 ins. diam., bears S.31½°E., 104 lks. dist., marked $\frac{1}{4}$ S 36 B T.
40.75	Wash, 25 lks. wide, course SE.
73.65	Gulch, course S.20°E.
76.85	Drain, course SE.
80.16	Cor. of secs. 25, 26, 35 and 36.
	Land, level. Soil, lava and gravelly, 3rd rate. Timber, ironwood, mesquite and sahuaro; undergrowth, greasewood, ocotillo, sage and cactus.
	N. 0°01'W., bet. secs. 25 and 26.
	Over level land, through scattering timber and undergrowth.
3.70	Drain, course SE.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$
	S26 S25
	1940
	raise a mound of stone, 2½ ft. base, 2½ ft. high, W. of cor.

## Subdivision of T. 6 N., R. 5 W.

## Chains,

- 45.60 Gulch, course SE.  
 47.00 Road, bears N.22 $\frac{3}{4}$ °E., and S.22 $\frac{3}{4}$ °W.  
 49.90 Same gulch, course SW.  
 51.50 Same gulch, course SE.  
 75.00 Same gulch, course SW.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, at cor. of secs. 23, 24, 25 and 26, with brass cap marked

T6N R5W  
 S23|S24  
 S26|S25

1940

raise a mound  
 of stone, 2 $\frac{1}{2}$  ft. base, 2 $\frac{1}{2}$  ft. high, W. of cor.

Land, level.

Soil, rocky; lava and gravelly, 3rd rate.

Timber, ironwood, mesquite and sahuaro; undergrowth, greasewood, sage, cactus and ocotillo.

-----  
 N.89°59'E., on a random line bet. secs. 24 and 25.

- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.

- 80.22 Intersect N. and S. line at 2 lks. S. of cor. of secs. 19, 24, 25 and 30, on E. bdy. of Tp., as evidenced by an iron post, 3 ins. diam., firmly set, projecting 12 ins. above ground, marked and witnessed as described in the official record.

Thence

S.89°58'W., on true line, bet. secs. 24 and 25.

Over mountainous land, through scattering timber and undergrowth.

Asc. 39 ft. over E. slope.

- 1.80 Ridge, bears N.10°W. and S.10°E.; desc. 158 ft. over W. slope.  
 13.70 Drain, course S.; leave mountainous, enter level land, bears N. and S.  
 18.30 Road, bears N.2 $\frac{1}{2}$ °E. and S.2 $\frac{1}{2}$ °W.  
 21.50 Wash, 15 lks. wide, course S.  
 23.00 Road, bears N. and S.  
 30.60 Wash, 15 lks. wide, course S.  
 40.11 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   $\frac{S\ 24}{S\ 25}$

1940

Chains	
	raise a mound of stone, 2½ ft. base, 2½ ft. high, N. of cor.
46.90	Wash, 10 lks. wide, course S.
71.20	Wash, 10 lks. wide, course S.
80.22	The cor. of secs. 23, 24, 25 and 26.
	Land, mountainous and level. Soil, lava and gravelly, 3rd rate. Timber, ironwood, mesquite, palo verde and sahuaro; undergrowth, greasewood, ocotillo and cactus.
	N. 0°01'W., bet. secs. 23 and 24.
	Over level land, through scattering undergrowth.
32.40	Wash, 60 lks. wide, course SE.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at ¼ sec. cor., with brass cap marked
	¼ S23 S24 1940
	raise a mound. of stone, 3 ft. base, 2½ ft. high, W. of cor.
48.70	Same wash as at 32.40 chs., course S.25°W.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, at cor. of secs. 13, 14, 23 and 24, with brass cap marked
	T6N R5W S14 S13 S23 S24 1940
	raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.
	Land, level. Soil, lava and gravelly, 3rd rate. Timber, none, except sahuaro; undergrowth, greasewood, cactus and palo verde.
	N.89°58'E., on a random line bet. secs. 13 and 24.
40.00	Set temp. ¼ sec. cor.
80.18	Intersect E. bdy. of Tp. at .5 lks. N. of the true point for cor. of secs. 13, 18, 19 and 24
	Thence
	West, on true line bet. secs. 13 and 24.
	Over rolling land, through scattering undergrowth.
4.40	Wash, 5 lks. wide, course S.
17.40	Wash, 15 lks. wide, course S.30°E.

Subdivision of T. 6 N., R. 5 W.

Chains	
25.00	Gulch, course SE.
31.20	Road, bears N.59½°W. and S.39¼°E.
40.09	Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground over a cross (+) marked on bedrock, and in a mound of stone to top, at ¼ sec. cor., with brass cap marked
	$\frac{1}{4} \begin{array}{l} S 13 \\ S 24 \end{array}$ <p style="text-align: center;">1940</p>
53.70	Gulch, course S.20°E.
57.10	Road, bears NW. and SE.; leave rolling, enter level land, bears NW. and SE.
73.90	Wash, 60 lks. wide, course S.25°W..
80.18	The cor. of secs. 13,14,23 and 24.
	Land, level and rolling. Soil, gravelly, 3rd rate. Timber, sahuaro; undergrowth, greasewood, palo verde, ironwood and cactus.
	----- N.0°01'W., bet. secs. 13 and 14.
	Over rolling land, through scattering undergrowth.
17.40	Bend in wash, 60 lks. wide, course S.10°E. from NE. Along broken E. slope.
22.30	Same wash, course S.70°E. from N.; along bed of wash.
31.85	Leave wash, course S. from N.15°W.; over sharply rolling land.
36.10	Road, bears N.60°W. and S.60°E.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at ¼ sec. cor., with brass cap marked
	$\frac{1}{4}$ $S14 S13$ <p style="text-align: center;">1940</p>
	of stone, 3 ft. base, 2½ ft. high, W. of cor. <p style="text-align: right; margin-right: 50px;">raise a mound</p>
49.20	East edge of wash, course S.5°W. from N.5°W.
60.30	Same wash, course S.5°W.; along broken E. slope.
70.46	Wash, 20 lks. wide, course S.50°E. along broken E. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground over a cross (+) marked on bedrock, and in a mound of stone to top, at cor. of secs. 11,12,13 and 14, with brass cap marked
	$\begin{array}{l} T6N R5W \\ S11 S12 \\ S14 S13 \end{array}$ <p style="text-align: center;">1940</p>

## Subdivision of T. 6 N., R. 5 W.

4828

Chains	Land, rolling. Soil, gravelly, 3rd rate. Timber, none; undergrowth, greasewood, ironwood, palo verde and cactus.
	-----
	East, on a random line bet. secs. 12 and 13.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.16	Intersect E. bdy. of Tp. at 9 lks. N. of cor. of secs. 7, 12, 13 and 18, as evidenced by an iron post, 3 ins. diam., firmly set, projecting 12 ins. above ground with brass cap marked and witnessed as described in the official record.
	Thence
	N. 89° 56' W., on true line bet. secs. 12 and 13.
	Over mountainous land, through scattering undergrowth, Asc. 303 ft. over broken NE. slope.
17.90	Saddle in ridge, bears N. 15° W. and S. 15° E.; asc. 145 ft. over broken S. slope.
22.90	Top of rocky spur, slopes S. 30° W.; desc. 400 ft. over SW. slope to drain.
30.80	Foot of steep descent.
36.80	Drain, course SW.; over broken land.
40.08	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S 12}{S 13}$
	1940 .
	raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.
53.95	Wash, 10 lks. wide, course S. 10° W.; asc. 119 ft. over E. slope.
59.95	Spur, slopes S.; desc. 122 ft. over W. slope.
69.05	Wash, course S. 10° W.; asc. 31 ft. over E. slope.
72.15	Short, flat topped spur, slopes S.; desc. 73 ft. over W. slope.
77.50	Road in wash, 60 lks. wide, course S.; road bears N. 7 $\frac{3}{4}$ ° W. and S. 22° E.; leave mountainous, enter rolling land.
80.16	The cor. of secs. 11, 12, 13 and 14.
	Land, mountainous and rolling. Soil, rocky and gravelly, 4th rate. Timber, sahuaro; undergrowth, greasewood, ironwood, palo verde and cactus.
	-----

14.

Subdivision of T. 6 N., R. 5 W.

Chains	<p>N. 0°01'W., bet. secs. 11 and 12.</p> <p>Over rolling land, through scattering undergrowth.</p> <p>3.40 Road in wash, 60 lks. wide, course S.42½°E. from N.42½°W.; asc. 83 ft. over SW. slope.</p> <p>10.80 Point of short spur, slopes W.; desc. 12 ft. over broken W. slope.</p> <p>29.60 Bend in wash from N.50°W. to S.50°W.; along broken W. slope.</p> <p>36.95 Wash, 15 lks. wide, course S.10°W.</p> <p>40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at ¼ sec. cor., with brass cap marked</p> <p style="text-align: center;">. . . . . ¼ . . . . .</p> <p style="text-align: center;">S11 S12</p> <p style="text-align: center;">. . . . . 1940 . . . . .</p> <p style="text-align: right;">raise a mound</p> <p>of stone, 3 ft. base, 3 ft. high, W. of cor.</p> <p>53.00 Same wash as at 36.95 chs. 30 lks. wide, course S.60°E. from N.20°W.</p> <p>55.50 Point of spur from N.60°E.; desc. 14 ft. over N. slope.</p> <p>56.80 Same wash, 15 lks. wide, course S.60°W.; asc. 80 ft. over S. slope.</p> <p>61.80 Road, bears S.79½°W. and S.70¾°E.</p> <p>76.90 Saddle in spur, slopes N.30°E. Asc. 17 ft. along broken west slope.</p> <p>80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, at cor. of secs. 1,2,11 and 12, with brass cap marked</p> <p style="text-align: center;">. . . . . T6N R5W . . . . .</p> <p style="text-align: center;">. . . . . S 2 S 1 . . . . .</p> <p style="text-align: center;">. . . . . S11 S12 . . . . .</p> <p style="text-align: center;">. . . . . 1940 . . . . .</p> <p style="text-align: right;">raise a mound</p> <p>of stone, 3 ft. base, 3 ft. high, W. of cor.</p> <p>Land, rolling.</p> <p>Soil, rocky, 4th rate.</p> <p>Timber, none; undergrowth, greasewood, cactus, palo verde and sahuaro.</p> <hr style="border-top: 1px dashed black;"/> <p>S.89°56'E., on a random line bet. secs. 1 and 12.</p> <p>40.00 Set temp. ¼ sec. cor.</p> <p>80.28 Intersect E. bdy. of Tp. at 7 lks. S. of cor. of secs. 1, 6,7 and 12, as evidenced by an iron post, 3 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap marked and witnessed as described in the official record.</p> <p>Thence</p>
--------	--



## . Subdivision of T. 6 N., R. 5 W.

4328

Chains	
	N. 89° 59' W., on true line bet. secs. 1 and 12. Over mountainous land, through scattering undergrowth. Ascend 29 ft. over a broken SW. slope.
5.00	Desc. 15 ft. over SW. slope.
10.70	Wash, 30 lks. wide, course S. 10° W.; asc. 373 ft. over E. slope.
27.40	Short, rocky spur, slopes S. 20° E.; thence along a broken SW. slope.
33.45	Ridge, bears NE. and S.; low saddle in ridge is S. about 20 chs. distant; desc. 213 ft. over SW. slope.
40.14	Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground over a cross (+) marked on bedrock, and in a mound of stone to top, at $\frac{1}{4}$ sec. cor., with brass cap marked
	$\begin{array}{r} S\ 1 \\ \frac{1}{4} \text{ ---} \\ S\ 12 \\ 1940 \end{array}$
	Desc. 39 ft. over broken SW. slope.
42.10	Wash, 10 lks. wide, course S. 20° W.; asc. 17 ft. over SE. slope.
45.10	Spur, slopes S. 10° W.; desc. 161 ft. over broken SW. slope.
65.15	Wash, 20 lks. wide, course S. 10° W.; asc. 105 ft. over E. slope.
72.20	Rocky spur, slopes S.; desc. 116 ft. over broken W. slope.
80.28	The cor. of secs. 1, 2, 11 and 12.
	Land, mountainous. Soil, rocky, 4th rate. Timber, sahuaro; undergrowth, greasewood, palo verde, ironwood and cactus.
	----- N. 0° 01' W., on true line bet. secs. 1 and 2. Over mountainous land, through scattering undergrowth. Descend 32 ft. over broken W. slope.
10.40	Wash, 20 lks. wide, course S. 20° W., from N. 50° E.; asc. 49 ft. over a SE. slope.
14.80	Point of flat spur, slopes S. 60° W.; desc. 22 ft. over N. slope.
16.70	Junction of washes 40 lks. wide, from N. 15° E., and N. 15° W., course S. 20° W.; asc. 64 ft. along a SW. slope.
30.20	Spur, slopes W.; desc. 17 ft. over NW. slope.
31.20	Wash, 20 lks. wide, course S. 50° W.; over broken land.
39.70	Wash, 20 lks. wide, course S. 70° W.; asc. 14 ft. over SE. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at $\frac{1}{4}$ sec. cor., with brass cap marked

Subdivision of T. 6 N., R. 5 W.

Chains

S 2 1/4 S 1  
1940

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

49.00 Wash, 10 lks. wide, course S. 20° W.

65.00 Wash. 10 lks. wide, course W.

68.30 Wash, 15 lks. wide, course S. 70° W.; asc. 101 ft. over SE. slope.

76.90 Spur, slopes S. 60° W.; desc. over NW. slope.

79.80 Intersect the S. bdy. of T. 7 N., R. 5 W.

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground over a cross (+) marked on bedrock, and in a mound of stone to top, at closing corner of secs. 1 and 2, with brass cap mkd.

T7N R5W  
S35  
S 2 1/4 S 1  
T6N R5W  
C C

1940 raise a mound of stone, 3 ft. base, 2 1/2 ft. high, S. of cor.

From point of intersection the 1/4 sec. cor. of sec. 35 only on the S. bdy. of T. 7 N., R. 5 W., bears S. 89° 48' W., 18.85 chs. dist., as evidenced by an iron post, 1 in. diam., set, marked and witnessed as described in the field notes of the survey of a portion of the S. bdy. of T. 7 N., R. 5 W., surveyed under this group.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, ironwood, palo verde and mesquite; undergrowth, greasewood, cats claw and cactus.

At midpoint on the N. bdy. of sec. 1.

Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bedrock, with a stone marked + deposited at base and in a mound of stone to top, at 1/4 sec. cor. of sec. 1, with brass cap mkd.

1/4 S 1  
1940

From this corner the cor. of secs. 35 and 36 only on the S. bdy. of T. 7 N., R. 5 W., bears S. 89° 48' W., 18.99 chs. dist., as evidenced by an iron post, 2 ins. diam., set, marked and witnessed as described in the field notes of the survey of a portion of the S. bdy. of T. 7 N., R. 5 W., surveyed under this group.

From cor. of secs. 2, 3, 34 and 35, on the S. bdy. of Tp., as evidenced by an iron post, 3 ins. diam., set, marked and witnessed as described in the official record.

N. 0° 01' W., bet. secs. 34 and 35.

Over level land, through scattering timber and undergrowth.

Subdivision of T. 6 N., R. 5 W.

4328

Chains	
31.80	Wash, 20 lks. wide, course S.20°E.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ <p style="text-align: center;">S34 S35</p> <p style="text-align: center;">1940</p> <p style="text-align: right;">from which</p>
	An ironwood, 7 ins. diam., bears N.87°W., 107 lks. dist., marked $\frac{1}{4}$ S 34 B. T.
	Raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.
52.00	Enter wash, 10 lks. wide, course S.10°W. from N.
56.50	Leave wash, course S. from NW.
69.20	Road, bears N.86°E. and S.67 $\frac{3}{4}$ °W.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, at cor. of secs. 26,27,34 and 35, with brass cap marked
	$\begin{array}{c} T6N R5W \\ S27 S26 \\ \hline S34 S35 \end{array}$ <p style="text-align: center;">1940</p> <p style="text-align: right;">raise a mound</p> <p style="text-align: center;">of stone, 2<math>\frac{1}{2}</math> ft. base, 2<math>\frac{1}{2}</math> ft. high, W. of cor.</p>
	<p>Land, level.</p> <p>Soil, rocky, 4th rate.</p> <p>Timber, ironwood and sahuaro; undergrowth, greasewood, palo verde and cactus.</p>
	----- S.89°59'E., on a random line bet. secs. 26 and 35.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.02	Intersect N. and S. line 3 lks. S. of cor. of secs. 25, 26,35 and 36.
	Thence
	West, on true line bet. secs. 26 and 35.
	Over level land, through scattering undergrowth.
1.80	Wash, 25 lks. wide, course S.
28.80	Drain, course S.
39.80	Wash, 10 lks. wide, course S.
40.01	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S 26}{S 35}$ <p style="text-align: center;">1940.</p>

18. BOOK 4828

Subdivision of T. 6 N., R. 5 W.

Chains	<p style="text-align: right;">raise a mound of stone, 2½ ft. base, 2½ ft. high, N. of cor. .</p>						
48.40	Road, bears N.35°E. and S.22°W. .						
53.30	Wash, 60 lks. wide, course S.						
61.00	Wash, 30 lks. wide, course S.						
80.02	The cor. of secs. 26,27,34 and 35.						
	<p>Land, level. Soil, rocky, 4th rate. Timber, sahuaro; undergrowth, greasewood, palo verde, ironwood and cactus.</p>						
	-----						
	N.0°01'W., bet. secs. 26 and 27.						
	Over level land, through scattering undergrowth. .						
5.00	Wash, 30 lks. wide, course S.20°W. .						
11.50	Wash, 15 lks. wide, course SE. .						
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at ¼ sec. cor., with brass cap marked						
	¼						
	S27   S26						
	1940						
	raise a mound of stone, 2½ ft. base, 2½ ft. high, W. of cor.						
40.40	Wash, 10 lks. wide, course S.30°W.						
56.00	Wash, 10 lks. wide, course S.30°W.						
67.30	Lava ledge, 5 chs. long, 50 ft. high, bears NE. and SW. near NE. point.						
70.00	Wash, 6 lks. wide, course SE.						
72.20	Dim road, bears N.60°W. and S.60°E. .						
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, at cor. of secs. 22,23,26 and 27; with brass cap marked						
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>T6N</td> <td>R5W</td> </tr> <tr> <td>S22.</td> <td>S23</td> </tr> <tr> <td>S27</td> <td>S26</td> </tr> </table>	T6N	R5W	S22.	S23	S27	S26
T6N	R5W						
S22.	S23						
S27	S26						
	1940						
	from which						
	A mesquite, 5 ins. diam., bears S.72¾°E., 127 lks. dist., marked T 6 N R 5 W S 26 B T.						
	An ironwood, 5 ins. diam., bears N.43¼°W., 332 lks. dist., marked T 6 N R 5 W S 22 B T.						
	No other bearing trees available; raise a mound of stone, 2½ ft. base, 2½ ft. high, W. of cor.						
	<p>Land, level. Soil, rocky, 4th rate. Timber, ironwood and mesquite; sahuaro; undergrowth, greasewood, cactus and palo verde.</p>						

## Subdivision of T. 6 N., R. 5 W.

623

Chains	
	East, on a random line bet. secs. 23 and 26.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.96	Intersect the cor. of secs. 23, 24, 25 and 26.
	Thence
	West, on true line bet. secs. 23 and 26.
	Over level land, through scattering timber and undergrowth.
5.00	Wash, 10 lks. wide, course S.
27.80	Wash, 10 lks. wide, course S.10°E.
35.30	Drain, course S.
39.98	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S 23}{S 26}$
	1940
	raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.
42.50	Wash, 40 lks. wide, course S.
50.20	Wash, 6 lks. wide, course S.
67.50	Wash, 60 lks. wide, course S.
73.20	Drain, course S.
78.30	Wash, 10 lks. wide, course S.20°E.
79.96	The cor. of secs. 22, 23, 26 and 27.
	Land, level. Soil, rocky, 4th rate. Timber, ironwood and sahuaro; undergrowth, greasewood, palo verde and cactus.
	-----
	N.0°01'W., bet. secs. 22 and 23.
	Over rolling land, through scattering undergrowth.
6.80	Wash, 15 lks. wide, course SE.
11.00	Bend in same wash from NW. to S.15°W.
20.30	Same wash, course S.20°W.; asc. gradual S. slope.
35.00	Low spur slopes SE.; desc. 20 ft. over NE. slope.
36.10	Wash, 10 lks. wide, course SE.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$
	S22   S23
	1940

Subdivision of T. 6 N., R. 5 W.

Chains

raise a mound  
of stone, 3 ft. base, 2½ ft. high, W. of cor.  
Asc. gradually over S. slope.

61.40 Low spur, slopes SE.; desc. 12 ft. over NE. slope.

64.20 Drain, course SE.; over broken SE. slope.

71.00 Wash, 40 lks. wide, course SE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, at cor. of secs. 14, 15, 22 and 23, with brass cap marked

T6N	R5W
S15	S14
S22	S23

1940

raise a mound  
of stone, 4 ft. base, 2 ft. high, W. of cor.

Land, level.  
Soil, rocky, 4th rate.  
Timber, sahuaro; undergrowth, greasewood, palo verde, ironwood and cactus.

-----  
East, on a random line bet. secs. 14 and 23.

40.00 Set temp. ¼ sec. cor.

79.94 Intersect the cor. of secs. 13, 14, 23 and 24.

Thence

West, on true line bet. secs. 14 and 23.

Over rolling land, through scattering timber and undergrowth.

5.45 Drain, course S.

33.35 Shallow wash, 10 lks. wide, course S.

35.45 Dim road, bears N. and S.

38.75 Gulch, course S.

39.97 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at ¼ sec. cor., with brass cap marked

¼ S 14
S 23

1940

raise a mound  
of stone, 3 ft. base, 2½ ft. high, N. of cor.

41.00 Gulch, course S.

49.90 Wash, 25 lks. wide, course S.

63.50 Gulch, course S.

68.10 Gulch, course S. 20°E.

73.20 Gulch, course S.

## Subdivision of T. 6 N., R. 5 W.

1898

Chains	
79.94	The cor. of secs. 14, 15, 22 and 23. Land, rolling. Soil, rocky, 3rd rate. Timber, ironwood, palo verde and sahuaro; undergrowth, greasewood, cactus and scrub cats claw.
	-----
	N. 0° 01' W., bet. secs. 14 and 15. Over rolling land, through scattering timber and undergrowth.
11.00	Wash, 10 lks. wide, course S. 30° E. from N.; along same.
21.00	Leave wash, course S. from NW. Asc. 52 ft. over SW. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at $\frac{1}{4}$ sec. cor., with brass cap marked  <div style="text-align: center;"> <math>\frac{1}{4}</math>            S15   S14            1940            raise a mound            of stone, 2<math>\frac{1}{2}</math> ft. base, 2<math>\frac{1}{2}</math> ft. high, W. of cor.         </div>
41.30	Wash, 10 lks. wide, course S. 20° E.
58.70	Wash, 40 lks. wide, course S. 15° E.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, at cor. of secs. 10, 11, 14 and 15, with brass cap marked  <div style="text-align: center;">           T6N    R5W            S10   S11            S15   S14            1940            raise a mound            of stone, 3 ft. base, 2<math>\frac{1}{2}</math> ft. high, W. of cor.         </div>
	Land, rolling. Soil, rocky, 4th rate. Timber, ironwood, palo verde and sahuaro; undergrowth, greasewood, cats claw and cactus.
	-----
	East, on a random line bet. secs. 11 and 14.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.92	Intersect N. and S. line at 5 lks. N. of the cor. of secs. 11, 12, 13 and 14. Thence N. 89° 58' W., on true line bet. secs. 11 and 14. Over rolling land, through scattering timber and undergrowth.
1.00	Enter mountainous land, bears N. and S.; asc. 89 ft. over E. slope.
4.45	Short spur, slopes S. 20° E.; desc. 62 ft. over W. slope.

Chains	
9.05	Drain, near head, course SE.; asc. 45 ft. over E. slope.
15.90	Saddle in low spur, slopes S.15°E.; desc. 87 ft. over W. slope.
25.55	Wash, 10 lks. wide, course S.; asc. 30 ft. over E. slope.
32.05	Spur, slopes S.15°E.; desc. 33 ft. over broken W. slope.
39.96	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S \ 11}{S \ 14}$
	1940
	raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.
44.55	Wash, 10 lks. wide, course S.; asc. 11 ft. over E. slope.
46.05	Flat spur, slopes S.; desc. over W. slope.
49.95	Wash, 10 lks. wide, course S.
63.45	Wash, 20 lks. wide, course S.
66.95	Junction of washes from N.60°W. and N.30°W., course S.
79.10	Old road, bears N.30°E. and S.30°E.
79.92	The cor. of secs. 10, 11, 14 and 15.
	Land, rolling and mountainous. Soil, rocky, 4th rate. Timber, ironwood, palo verde and sahuaro; undergrowth, greasewood, cats claw and cactus.
	N.0°01'W., bet. secs. 10 and 11.
	Over rolling land, through scattering timber and undergrowth.
0.40	Old road, bears N.75°W. and S.75°E.; desc. 34 ft. over broken land.
3.00	Wash, 40 lks. wide, course S.60°E.; asc. 34 ft. over broken land.
12.60	Wash, 15 lks. wide, course S.75°E.; asc. 68 ft. over S. slope.
17.90	Point of spur, slopes NE.; along broken E. slope.
33.00	Asc. 39 ft. over S. slope.
35.20	Short spur, slopes SE.; desc. 47 ft. over N. slope.
37.40	Wash, 20 lks. wide, course E.; asc. 13 ft. over broken SE. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground over a cross (+) marked on bedrock, and in a mound of stone to top, at $\frac{1}{4}$ sec. cor., with brass cap marked



Subdivision of T. 6 N., R. 5 W.

4328

Chains	
	$\frac{1}{4}$ S10   S11 1940
	Asc. 66 ft. over broken SE. slope:
52.25	Spur, slopes SE.; desc. 54 ft. over NE. slope.
54.90	Wash, 20 lks. wide, course S.70°E.; asc. 68 ft. over SE. slope.
58.50	Spur, slopes SE.; desc. 36 ft. over broken N. slope.
65.30	Wash, 15 lks. wide, course S.60°E.; asc. 36 ft. over rolling land.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, at cor. of secs. 2,3,10 and 11, with brass cap marked
	T6N R5W S 3   S 2 S10   S11 1940
	raise a mound of stone, 2 ft. base, 2½ ft. high, W. of cor.
	Land, rolling. Soil, rocky, 4th rate. Timber; ironwood, palo verde and sahuaro; undergrowth, greasewood and cactus.
	S.89°58'E., on a random line bet. secs. 2 and 11.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.94	Intersect N. and S. line at 5 lks. S. of cor. of secs. 1,2,11 and 12.
	Thence West, on true line bet. secs. 2 and 11. Over mountainous land, through scattering timber and undergrowth. Desc. 36 ft. over broken W. slope.
6.15	Wash; 1 ch. wide, course S.10°E.; leave mountainous; enter rolling land.
15.75	Wash, 30 lks. wide, course S.20°W.; asc. 91 ft. over E. slope.
35.55	Spur, slopes S.10°E.; desc. 57 ft. over W. slope.
39.97	Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground over a cross (+) marked on bedrock, and in a mound of stone to top, at $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ $\frac{S 2}{S 11}$ 1940

## Subdivision of T. 6 N., R. 5 W.

Chains	
40.65	Road, in wash, 50 lks. wide, course S.22 $\frac{1}{4}$ °E. from N.22 $\frac{1}{4}$ °W.; asc. 174 ft. over E. slope.
58.65	Spur, slopes S.30°E.; desc. 147 ft. over broken W. slope.
67.25	Wash. 10 lks. wide, course S.; asc. 45 ft. over rolling land.
79.94	The cor. of secs. 2, 3, 10 and 11.
	Land, mountainous. Soil, rocky, 4th rate. Timber, palo verde and ironwood, sahuaro; undergrowth, greasewood, cactus and cats claw.
	-----
	N. 0°01'W., on true line bet. secs. 2 and 3.
	Over mountainous land, through scattering timber and undergrowth.
5.60	Wash, 60 lks. wide, course S.80°E.; asc. 31 ft. over rolling land.
9.50	Desc. 17 ft. over NE. slope.
11.00	Wash, 20 lks. wide, course S.70°E.; asc. 47 ft. over broken S. slope.
16.70	Spur, slopes E.; desc. 58 ft. over N. slope.
21.20	Wash, 30 lks. wide, course S.60°E.; asc. 23 ft. over S. slope.
22.60	Flat spur, slopes S.75°E.; desc. 29 ft. over N. slope.
24.50	Road in wash 60 lks. wide, course S.56 $\frac{1}{4}$ °E.; asc. 96 ft. over S. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground over a cross (+) marked on bedrock, and in a mound of stone to top, at $\frac{1}{4}$ sec. cor., with brass cap marked
	+
	S3 S2
	1940
	Continue on ascent over S. slope.
41.50	Point of spur, slopes S.20°W.; asc. 66 ft. along W. slope.
48.00	Same spur, slopes S.30°E.; along SW. slope.
52.30	Ridge, bears N.60°W. and S.60°E.; desc. 103 ft. along an E. slope.
62.90	Wash, 20 lks. wide, course S.60°E.; asc. 50 ft. over S. slope.
67.30	Spur, slopes S.60°E.; desc. 38 ft. over NE. slope.
71.00	Wash, 10 lks. wide, course S.60°E.; asc. 80 ft. over broken SW. slope.
79.71	Intersect S. bdy. of T.7 N., R.5 W.

## Subdivision of T. 6 N., R. 5 W.

5828

Chains Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground, over a cross (+) marked on bedrock, and in a mound of stone to top, at closing corner of secs. 2 and 3, with brass cap mkd.

.T7N R5W

S34

S3 | S2

T6N | R5W

C C

1940

From point of intersection the  $\frac{1}{4}$  sec. cor. of sec. 34 only on the S. bdy. of T. 7 N., R. 5 W., bears West, 18.755 chs. dist., as evidenced by an iron post, 1 in. diam., set, marked and witnessed as described in the field notes of a portion of the S. bdy. of T. 7 N., R. 5 W., resurveyed under this group.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, ironwood; undergrowth, greasewood and cactus.

-----  
At midpoint on the N. bdy. of sec. 2

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at  $\frac{1}{4}$  sec. cor. of sec. 2, with brass cap mkd.

$\frac{1}{4}$  S 2

1940

raise a mound  
of stone, 3 ft. base, 2 $\frac{1}{2}$  ft. high, S. of cor.

From this corner, the cor. of secs. 34 and 35 only on the S. bdy. of T. 7 N., R. 5 W., bears S. 89° 48' W., 18.87 chs. dist., as evidenced by an iron post, 2 ins. diam., set, marked and witnessed as described in the field notes of a portion of the S. bdy. of T. 7 N., R. 5 W., resurveyed under this group.

-----  
From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp., as evidenced by an iron post, 3 ins. diam., set, marked and witnessed as described in the official record.

N. 0° 02' W., bet. secs. 33 and 34.

Over nearly level land, through medium timber and undergrowth.

9.80 Wash, 10 lks. wide, course SE.

17.20 Wash, 20 lks. wide, course SE..

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S33 | S34

1940

raise a mound  
of stone, 2 $\frac{1}{2}$  ft. base, 2 $\frac{1}{2}$  ft. high, W. of cor.

Continue over nearly level land.

47.50 Wash, 5 lks. wide, course SE..

53.20 Road, bears N. 72 $\frac{1}{4}$ ° E., and S. 70 $\frac{1}{4}$ ° W.

56.60 Wash, 5 lks. wide, course SE.

Subdivision of T. 6 N., R. 5 W.

Chains									
76.20	Wash, 6 lks. wide, course SE.								
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, at the cor. of secs. 27, 28, 33 and 34, with brass cap mkd.								
	<table border="1"> <tr><td>T6N</td><td>R5W</td></tr> <tr><td>S28</td><td>S27</td></tr> <tr><td>S33</td><td>S34</td></tr> <tr><td colspan="2">1940</td></tr> </table>	T6N	R5W	S28	S27	S33	S34	1940	
T6N	R5W								
S28	S27								
S33	S34								
1940									
	raise a mound of stone, 2½ ft. base, 2 ft. high, W. of cor.								
	Land, nearly level. Soil, lava and gravelly, 3rd rate. Timber, palo verde, ironwood, cats claw, mesquite and sahuaro; undergrowth, sagebrush and cactus.								
	----- S. 89° 59' E., on a random line bet. secs. 27 and 34.								
40.00	Set temp. ¼ sec. cor.								
80.10	Intersect N. and S. line, .7 lks. N. of the cor. of secs. 26, 27, 34 and 35.								
	Thence								
	N. 89° 56' W., on true line bet. secs. 27 and 34.								
	Over nearly level land, through medium timber and undergrowth.								
2.10	Wash, 6 lks. wide, course S.								
25.40	Wash, 6 lks. wide, course S. 20° E.								
40.05	Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, at ¼ sec. cor., with brass cap mkd.								
	<table border="1"> <tr><td>¼</td><td>S27</td></tr> <tr><td></td><td>S34</td></tr> <tr><td colspan="2">1940</td></tr> </table>	¼	S27		S34	1940			
¼	S27								
	S34								
1940									
	raise a mound of stone, 2½ ft. base, 2½ ft. high, N. of cor.								
	Continue over nearly level land.								
43.80	Dim road, bears N. 20° E. and S. 20° W.								
53.60	Wash, 50 lks. wide, course S. 15° E.								
72.40	Wash, 30 lks. wide, course SE.								
78.60	Shallow wash, 15 lks. wide, course SE.								
80.10	The cor. of secs. 27, 28, 33 and 34.								
	Land, nearly level. Soil, lava and gravelly, 3rd rate. Timber, palo verde, ironwood, cats claw, mesquite and sahuaro; undergrowth, sagebrush and cactus.								
	-----								

## Subdivision of T. 6 N., R. 5 W.

4328

Chains	N.0°02'W., bet. secs. 27 and 28. Over nearly level land, through scattering timber and undergrowth.
1.10	Shallow wash, 12 lks. wide, course SE.
3.50	Wash, 30 lks. wide, course SE.
25.10	Gulch, course S.60°E. Leave level, enter rolling land, bears NW. and SE.; ascend 63 ft. over S. slope.
33.50	Spur, slopes SE.; descend 12 ft. along E. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bedrock, with + marked on bedrock at base and in a mound of stone to top, at $\frac{1}{4}$ sec. cor., with brass cap marked  <div style="text-align: center;"> <math>\frac{1}{4}</math>  S28 S27  1940 </div>
	Descend 12 ft. along E. slope.
53.00	Gulch, course SE.; thence along W. slope.
59.50	Same gulch, course SW.; along E. slope.
62.90	Same gulch, course SE.; asc. 46 ft. along a gradual W. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, at cor. of secs. 21, 22, 27 and 28, with brass cap marked  <div style="text-align: center;"> T6N R5W  S21 S22  S28 S27  1940  raise a mound  of stone, 2<math>\frac{1}{2}</math> ft. base, 2<math>\frac{1}{2}</math> ft. high, W. of cor. </div>
	Land, nearly level and rolling. Soil, gravelly, 3rd rate. Timber, palo verde, ironwood, cats claw, mesquite and sahuaro; undergrowth, sagebrush and cactus.
	S.89°56'E., on a random line bet. secs. 22 and 27.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.10	Intersect N. and S. line, 5 lks. S. of cor. of secs. 22, 23, 26 and 27. Thence
	N.89°58'W., on true line bet. secs. 22 and 27. Over rolling land, through scattering timber and undergrowth.
8.10	Drain, course S.
19.50	Road, bears NW. and SE.

## Subdivision of T. 6 N., R. 5 W.

Chains	
30.50	Dim road, bears N.20°E. and S.20°W.
32.60	Wash, 15 lks. wide, course S.
35.60	Drain, course S.
40.05	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S 22}{S 27}$
	1940
	raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.
	Continue over rolling land.
48.60	Wash, 30 lks. wide, course S.30°E.
62.80	Wash, 15 lks. wide, course SE.; asc. 50 ft. over E. slope.
69.40	Spur, slopes SE.; desc. 36 ft. over SW. slope.
80.10	The cor. of secs. 21,22,27 and 28.
	Land, rolling. Soil, gravelly, 3rd rate. Timber, palo verde, ironwood, mesquite, cats claw and sahuaro; undergrowth, sagebrush and cactus.
	----- N.0°02'W., bet. secs. 21 and 22.
	Over rolling land, through a medium growth of timber and undergrowth.
	Along SW. slope.
2.80	Gulch, course SW.; asc. 86 ft. over SE. slope.
15.50	Spur, slopes E.; desc. 20 ft. along E. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bedrock, with + marked on bedrock at base, and in a mound of stone to top, at $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$
	S21 S22
	1940
	Continue along E. slope.
50.00	End of road from southeast tunnel, bears W., approx. 1.50 chs. dist. Slope changes to SE.
71.80	Gulch, course S.60°E.
75.50	Small gulch, course SE.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, at the cor. of secs. 15,16,21 and 22, with brass cap marked

## Subdivision of T. 6 N., R. 5 W.

4328

## Chains

T6N R5W  
 S16 | S15  
 S21 | S22

.1940

raise a mound  
 of stone, 3 ft. base, 2½ ft. high, W. of cor.

Land, rolling.

Soil, gravelly, 3rd rate.

Timber, palo verde, ironwood, mesquite and sahuaro;  
 undergrowth, sagebrush and cactus..

S.89°58'E., on a random line bet. secs. 15 and 22.

40.00 Set temp. ¼ sec. cor.

80.12 Intersect N. and S. line, 9 lks. S. of the cor. of secs.  
 14,15,22 and 23.

Thence

S.89°58'W., on true line bet. secs. 15 and 22.

Over gently rolling land, through scattering timber and  
 medium dense undergrowth.

12.90 Dim road, bears N. and S.

15.10 Wash, 15 lks. wide, course S.

17.20 Drain, course S.20°E.

18.30 Dim road, bears N. and S.

22.10 Wash, 40 lks. wide, course S.

37.20 Gulch, course SE.

40.06 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the  
 ground to bedrock, with + marked on bedrock at base, and  
 in a mound of stone to top, at ¼ sec. cor., with brass  
 cap marked

¼  $\frac{S\ 15}{S\ 22}$

.1940

Continue over gently rolling land.

51.60 Small gulch, course S.30°E.

63.40 Gulch, course S.30°E.

77.30 Wash, 30 lks. wide, course SE.

79.95 Dim road, bears NW. and SE.

80.12 The cor. of secs. 15,16,21 and 22.

Land, gently rolling.

Soil, gravelly, 3rd rate.

Timber, palo verde, ironwood, cats claw and sahuaro;  
 undergrowth, sagebrush and cactus.

Subdivision of T. 6 N., R. 5 W.

Chains

N.0°02'W., bet. secs. 15 and 16.

Over rolling land, through scattering timber and medium dense undergrowth.

0.50 Road, bears N.10°W. and S.15°E.; desc. 26 ft.

3.95. Wash, .50 lks. wide, course SE.; asc. 55 ft. over SW. slope.

32.80 Thence desc. 20 ft.

34.00 Wash, 30 lks. wide, course S.25°E.; asc. 30 ft.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$

S16|S15.

1940

raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$  ft. high, W. of cor.

40.60 Wash, 15 lks. wide, course S.40°W.; asc. 73 ft. over SE. slope.

52.20 Point of spur, slopes SW. Thence along W. slope.

62.10 Same spur, slopes SE.; desc. 55 ft. over N. slope.

67.00 Wash, 10 lks. wide, course E.; asc. 102 ft. along broken E. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, at the cor. of secs. 9,10,15 and 16, with brass cap marked

T6N R5W  
S 9|S10  
S16|S15

1940

from which

A lone ironwood, 6 ins. diam., bears N.24 $\frac{1}{4}$ °W., 100 lks. dist., marked T 6 N R 5 W S 9 B T.

Raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$  ft. high, W. of cor.

Land, rolling.

Soil, rocky, 4th rate.

Timber, ironwood, palo verde, mesquite; undergrowth, greasewood, cats claw, sagebrush and cactus.

N.89°58'E., on a random line bet. secs. 10 and 15.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.06 Intersect N. and S. line, at the cor. of secs. 10,11,14 and 15.

Thence

S.89°58'W., on true line bet. secs. 10 and 15.



## Subdivision of T. 6.N., R. 5 W.

9328

Chains	
	Over heavily rolling land, through scattering timber and medium dense undergrowth.
	Desc. 37 ft. over W. slope.
7.15	Wash, 50 lks. wide, course S.; asc. 23 ft.
12.00	Thence desc. 29 ft. over W. slope.
13.05	Wash, 40 lks. wide, course S.15°E.; asc. 81 ft. over broken NE. slope.
22.05	Spur, slopes S.10°E.; desc. 55 ft. over broken W. slope.
29.05	Wash, 15 lks. wide, course S.20°E.; asc. 108 ft. over SE. slope.
40.03	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ $\frac{S 10}{S 15}$
	1940
	raise a mound of stone, 2½ ft. base, 2½ ft. high, N. of cor.
	Asc. 20 ft. over SE. slope.
41.15	Spur, slopes S.; desc. 54 ft. over broken W. slope.
47.75	Wash, 30 lks. wide, course S.10°E.; asc. 78 ft. over broken E. slope.
55.65	Spur, slopes S.10°E.; desc. 161 ft. over broken W. slope.
67.35	Ravine, 10 lks. wide, course SW.; asc. 30 ft.
71.55	Top of ascent; desc. 81 ft. over broken SW. slope.
74.45	Wash, 20 lks. wide, course SE.; asc. 63 ft. over broken E. slope.
80.06	The cor. of secs. 9,10,15 and 16.
	Land, heavily rolling. Soil, rocky, 4th rate. Timber, ironwood, palo verde and mesquite; undergrowth, greasewood, cats claw, sagebrush and cactus.
	-----
	N.0°02'W., bet. secs. 9 and 10.
	Over heavily rolling land, through scattering timber and medium dense undergrowth.
	Desc. 17 ft. along broken E. slope.
3.10	Wash, 40 lks. wide, course S.25°E.; asc. 137 ft. over broken S. slope.
31.60	Spur, slopes S.20°W.; thence along broken W. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock, with + marked on bedrock at base, and in a mound of stone to top, at $\frac{1}{4}$ sec. cor., with brass cap marked

Subdivision of T. 6 N., R. 5 W.

Chains	$\frac{1}{4}$ S 9 S10 1940
	Desc. 30 ft. along broken W. slope.
43.20	Ravine, 15 lks. wide, course S.60°W.; asc. 111 ft. over broken SE. slope.
54.00	Spur, slopes SE.; desc. 43 ft. over NE. slope.
56.40	Ravine, 15 lks. wide, course S.60°E.; asc. 43 ft. over S. slope.
57.10	Point of spur, slopes SE.; desc. 26 ft. over N. slope.
59.10	Ravine, 10 lks. wide, course SE.; asc. 76 ft. over SW. slope.
61.70	Point of short spur, slopes SW.; desc. 34 ft. over NW. slope.
64.60	Head of ravine, course S.60°W.; asc. 99 ft. over SW. slope.
66.70	Saddle in ridge, bears SE. and NW.; thence along an E. slope.
71.70	Top of ascent, from which top of hill bears W., 1.50 chs. dist.; desc. 42 ft. over NE. slope.
75.60	Spur, slopes S.60°E.; desc. 103 ft. over N. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, at the cor. of secs. 3, 4, 9 and 10, with brass cap marked
	T6N R5W S 4 S 3 S 9 S10
	1940
	raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.
	Land, heavily rolling. Soil, rocky, 4th rate. Timber, ironwood, palo verde and mesquite; undergrowth, greasewood, cats claw, sagebrush and cactus.
	N.89°58'E., on a random line bet. secs. 3 and 10.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.16	Intersect N. and S. line, 7 lks. S. of the cor. of secs. 2, 3, 10 and 11.
	Thence
	S.89°55'W., on true line bet. secs. 3 and 10.
	Over heavily rolling land, through scattering timber and undergrowth.
	Desc. 24 ft. over general SW. slope.

## Subdivision of T. 6 N., R. 5 W.

4028

Chains	
12.55	Wash, 20 lks. wide, course SE.; asc. 117 ft. over NE. slope.
32.05	Spur, slopes N. 20° E.; desc. 25 ft. over a NW. slope.
35.05	Asc. 17 ft. along a N. slope.
40.08	Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock, with + marked on bedrock at base, and in a mound of stone to top, at ¼ sec. cor., with brass cap mkd.
	$\begin{array}{r} \text{S } 3 \\ \hline \text{S } 10 \\ 1940 \end{array}$
	Ascend 52 ft. along a N. slope.
45.25	Ridge, bears N. 60° W. and S. 60° E.; desc. 45 ft. along a S. slope.
48.75	Same ridge, bears N. 70° E. and SW.; desc. 49 ft. over a W. slope.
51.85	Wash, 15 lks. wide, course N. 10° W.; asc. 32 ft. over a NE. slope.
53.65	Spur, slopes N. 10° W.; desc. 42 ft. over a NW. slope.
55.55	Wash, 15 lks. wide, course N. 10° E.; asc. 42 ft. over a NE. slope.
58.25	Spur, slopes N.; desc. 16 ft. over a NW. slope.
60.05	Wash, 15 lks. wide, course N.; asc. 68 ft. over a NE. slope.
63.65	Spur, slopes N. 15° E.; desc. 103 ft. over a NW. slope.
72.05	Wash, 15 lks. wide, course N.; asc. 56 ft. over a broken NE. slope.
77.65	Spur, slopes N. 10° E.; desc. 34 ft. over NW. slope.
80.16	The cor. of secs. 3, 4, 9 and 10.
	Land, heavily rolling. Soil, gravelly, 3rd rate. Timber, palo verde, ironwood, mesquite and cats claw; undergrowth, sagebrush, cats claw and cactus.
	-----
	N. 0° 02' W., on true line bet. secs. 3 and 4.
	Over heavily rolling land, through scattering timber and undergrowth.
	Desc. 18 ft. over a NW. slope.
2.00	Wash, 20 lks. wide, course N. 20° E.; asc. 18 ft. over a S. slope.
8.60	Spur, slopes N. 20° E.; desc. 27 ft. over a N. slope.
12.00	Wash, 20 lks. wide, course N. 80° E.; asc. 27 ft. over S. slope.
13.60	Spur, slopes N. 80° E.; desc. 25 ft. over N. slope.
14.40.	Wash, 20 lks. wide, course E.; asc. 25 ft. over S. slope.

## Subdivision of T. 6 N., R. 5 W.

Chains	
18.00	Road, bears E. and W., on spur, slopes E.; desc. 23 ft. over a N. slope.
20.60	Wash, 20 lks. wide, course E.; asc. 23 ft. over a S. slope.
22.30	Top of ascent; desc. 26 ft. over a N. slope.
24.20	Wash, 30 lks. wide, course S. 80° E.; asc. 52 ft. over S. slope.
29.00	Short, flat spur, slopes E.; desc. 32 ft. over broken NE. slope.
37.50	Wash, 40 lks. wide, course S. 50° E.; asc. 55 ft. over S. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at $\frac{1}{4}$ sec. cor., with brass cap mkd. <div style="text-align: center;"> <math>\frac{1}{4}</math>  S4   S3  1940 </div>
	raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.
	Continue over S. slope.
46.20	Spur, slopes E.; desc. 49 ft. over N. slope.
51.85	Wash, 30 lks. wide, course SE.; asc. 114 ft. over S. slope.
64.10	Spur, slopes S. 70° E.; desc. 98 ft. over NE. slope.
69.90	Wash, 10 lks. wide, course E.; asc. 25 ft. over SE. slope.
70.00	Dim road, bears N. 60° E. and S. 60° W.
78.40	Point of spur, slopes N. 60° E.; desc. 20 ft. over NE. slope.
79.68	Intersect S. bdy. of T. 7 N., R. 5 W. Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, at closing cor. of secs. 3 and 4, with brass cap marked. <div style="text-align: center;"> T7N R5W  . S33  S4   S3  T6N R5W  C C  1940 </div>
	raise a mound of stone, 3 ft. base, 2½ ft. high, S. of cor.
	From point of intersection, the $\frac{1}{4}$ sec. cor. of sec. 33 only, on the S. bdy. of T. 7 N., R. 5 W., bears West, 18.36 chs. dist., as evidenced by an iron post, 1 in. diam. set, marked and witnessed, as described in the field notes of a portion of the S. bdy. of T. 7 N., R. 5 W., resurveyed under this group.
	Land, heavily rolling. Soil, gravelly, 3rd rate. Timber, palo verde, ironwood, mesquite and cats claw. Undergrowth, greasewood, sage and cactus.
	At midpoint on the N. bdy. of sec. 3.
	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the

## Subdivision of T. 6 N., R. 5 W.

## Chains

ground at  $\frac{1}{4}$  sec. cor. of sec. 3, with brass cap marked

$\frac{1}{4}$  S 3  
1940

raise a mound  
of stone, 4 ft. base, 3 ft. high, S. of cor.

From this cor., the cor. of secs. 33 and 34 only on the S. bdy. of T. 7 N., R. 5 W., bears West, 18.56 chs. dist. as evidenced by an iron post, 2 ins. diam., set, marked and witnessed as described in the field notes of a portion of the S. bdy. of T. 7 N., R. 5 W., resurveyed under this group.

-----  
From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of Tp., as evidenced by an iron post, 3 ins. diam., set, marked and witnessed as described in the official record.

N. 0° 02' W., bet. secs. 32 and 33.

Over rolling land, through scattering timber and medium dense undergrowth.

26.30 Road, bears N. 79 $\frac{1}{2}$ ° E., and S. 83° W.

30.00 Wash, 40 lks. wide, course S. 10° W.; asc. 29 ft.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground at  $\frac{1}{4}$  sec. cor., with brass cap mkd.

S32 | S33  
1940

raise a mound  
of stone, 2 $\frac{1}{2}$  ft. base, 2 $\frac{1}{2}$  ft. high, W. of cor.

Continue over rolling land.

41.30 Wash, 20 lks. wide, course S. 20° E.

44.20 Old road, bears E. and W.

55.00 Wash, course S. 20° W.; asc. 29 ft.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, at cor. of secs. 28, 29, 32 and 33, with brass cap marked

T6N R5W  
S29 | S28  
S32 | S33  
1940

raise a mound  
of stone, 2 $\frac{1}{2}$  ft. base, 2 $\frac{1}{2}$  ft. high, W. of cor.

Land, rolling.

Soil, gravelly, 3rd rate.

Timber, palo verde, ironwood, mesquite and cats claw; undergrowth, sagebrush, greasewood, cats claw and cactus.

-----  
S. 89° 59' E., on a random line bet. secs. 28 and 33.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.96 Intersect N. and S. line, 3 lks. N. of the cor. of secs. 27, 28, 33 and 34.

Subdivision of T. 6 N., R. 5 W.

Chains

Thence

N. 89° 58' W., on true line bet. secs. 28 and 33.

Over gently rolling land, through scattering timber and medium dense undergrowth.

7.85 Old road, bears N. 50° E. and S. 50° W.

16.95 Wash, 30 lks. wide, course S.

22.35 Wash, 50 lks. wide, course S.

27.75 Wash, 30 lks. wide, course S.

31.35 Wash, 15 lks. wide, course S.

39.98 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at 1/4 sec. cor., with brass cap marked

1/4 S 28  
S 33  
1940

raise a mound of stone, 3 ft. base, 2 1/2 ft. high, N. of cor.

Continue over rolling land.

40.35 Wash, 20 lks. wide, course S. 10° E.

57.15 Wash, 30 lks. wide, course S. 20° E.

77.95 Wash, 20 lks. wide, course S.

79.96 The cor. of secs. 28, 29, 32 and 33.

Land, gently rolling.  
Soil, gravelly, 3rd rate.  
Timber, palo verde, ironwood, mesquite and cats claw;  
undergrowth, greasewood, cats claw and cactus.

N. 0° 02' W., bet. secs. 28 and 29.

Over rolling land, through scattering timber and medium dense undergrowth.

5.00 Wash, 10 lks. wide, course S. 20° E.; asc. 106 ft. over rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at 1/4 sec. cor., with brass cap marked

1/4  
S 29 | S 28  
1940

raise a mound of stone, 2 1/2 ft. base, 2 1/2 ft. high, W. of cor.

Ascend 77 ft. over rolling land.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, at cor. of secs. 20, 21, 28 and 29, with brass cap marked

Subdivision of T. 6 N., R. 5 W.

Chains	T6N R5W S20   S21 S29   S28
	1940 raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.
	Land, rolling. Soil, gravelly, 3rd rate. Timber, palo verde, ironwood, cats claw and mesquite. Undergrowth, greasewood, sagebrush, cats claw and cactus.
	S.89°58'E., on a random line bet. secs. 21 and 28.
40.00	Set temp. ¼ sec. cor.
80.00	Intersect N. and S. line, 5 lks. N. of the cor. of secs. 21,22,27 and 28.
	Thence
	N.89°56'W., on true line bet. secs. 21 and 28.
	Over rolling land, through scattering timber and undergrowth.
	Desc. 32 ft.
2.40	Wash, 20 lks. wide, course S.
3.90	Wash, 15 lks. wide, course S.15°E. Leave rolling, enter mountainous land; asc. 289 ft. over E. slope.
20.80	Rocky ridge, bears N. and S.; desc. 263 ft. over W. slope.
34.80	Wash, 20 lks. wide, course S.15°W. Thence over rolling land.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at ¼ sec. cor., with brass cap marked
	¼ $\frac{S\ 21}{S\ 28}$
	1940 raise a mound of stone, 3 ft. base, 2½ ft. high, N. of cor.
	Over rolling land.
43.75	Wash, 10 lks. wide, course S.; asc. 40 ft. over E. slope.
51.00	Point of rocky spur, slopes S., from N.20°W.; desc. 66 ft.
71.00	Wash, 100 lks. wide, course SE.
75.00	Wash, 40 lks. wide, course S.
80.00	The cor. of secs. 20,21,28 and 29.
	Land, rolling and mountainous. Soil, gravelly, 3rd rate. Timber, palo verde, ironwood, mesquite and cats claw. Undergrowth, sagebrush, greasewood, cats claw and cactus.

## Subdivision of T. 6 N., R. 5 W.

Chains	
	N.0°02'W., bet. secs. 20 and 21. Over rolling land, through scattering timber and undergrowth.
4.20	Wash, 15 lks. wide, course S.15°E.
8.10	Wash, 100 lks. wide, course S.30°E.
15.00	Center of wash, 5 chs. wide, course S.20°E.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at $\frac{1}{4}$ sec. cor., with brass cap marked  $\frac{1}{4}$ S20 S21  1940 raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor. Continue over rolling land.
44.00	Road, bears N.70°W. and S.70°E.
51.80	Wash, 20 lks. wide, course E.
69.40	Wash, 15 lks. wide, course S.15°E.
76.60	Wash, 15 lks. wide, course S.15°W.
79.50	Wash, 10 lks. wide, course S.15°E.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, at cor. of secs. 16,17,20 and 21, with brass cap marked  T6N R5W S17 S16 S20 S21  1940 raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor. Land, rolling. Soil, gravelly, 3rd rate. Timber, palo verde, ironwood and mesquite; undergrowth, greasewood, cats claw and cactus. -----
	S.89°57'E., on a random line bet. secs. 16 and 21.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
45.96	As the line ahead is extremely precipitous, and it is impracticable to obtain measurement by chaining, triangulate as follows: Set a flag at this point, designated "A". The cor. of secs. 15,16,21 and 22 bears S.89°40'E. Set flag at this cor. designated "B", the vertical angle to which is - 18° 05'.




Subdivision of T. 6 N., R. 5 W.

1028

Chains

From "B", use as the base the line bet. secs. 15 and 16; N.0°02'W., 52.14 chs. to flag designated as "C", from which the flag at "A" bears S.33°09'W.

Included angles of the triangle "A-B-C" are 57°11', 89°38', and 33°11', the sum of which is 180°.

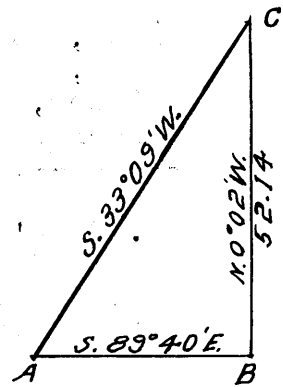

Dist. chained on random line to "A" = 45.96 chs.  
 Dist. triangulated, "A" to "B" = 33.96 "  
 Total dist. of line bet. secs. 16 and 21 = 79.92 chs.  
 Total southing = .24 chs.

79.92 The cor. of secs. 15, 16, 21 and 22.

Thence

N.89°50'W., on true line bet. secs. 16 and 21; dist. obtained by triangulation.

Over mountainous land, through scattering timber and undergrowth.

Asc. 733 ft. over a precipitous E. slope.

33.96 Rocky ridge, bears N.25°W. and S.25°E. Crest of Nugget Mountain bears N.25°W., 5.00 chs. dist. Crest is 50 ft. above line.

Thence by chaining. Desc. 201 ft. over W. slope.

37.50 Head of small drain, course S.10°W.

38.90 Short, sharp spur, slopes S.; desc. 11 ft. over W. slope.

39.96 Set an iron post, 3 ft. long, 1 in. diam., over a 6 inch cross (+) marked on solid surface rock, and in a mound of stone to top, at 1/4 sec. cor., with brass cap marked

$$\frac{1}{4} \frac{S 16}{S 21}$$

1940

Desc. 421 ft. over W. slope.

41.90 Base of cliff, approx. 130 ft. high, bears N. and S., faces W. Continue descent.

56.60 Head of drain, course S.; asc. 101 ft. over SE. slope.

58.95 Saddle in spur, slopes S.75°W.

63.70 Point of short spur, slopes N. From this point, a peak with crest of rock at top 100 ft. high, bears S. approx. 3.00 chs. dist.; desc. 180 ft. over NW. slope.

73.80 Wash, 15 lks. wide, course S.; asc. 19 ft.

74.90 Leave mountainous, enter heavily rolling land; desc. 34 ft.

79.92 The cor. of secs. 16, 17, 20 and 21.

## Subdivision of T. 6 N., R. 5 W.

Chains	Land, mountainous and heavily rolling. Soil, gravelly and rocky, 3rd and 4th rates. Timber, ironwood, mesquite, palo verde and cats claw. Undergrowth, sage brush, greasewood, cats claw and cactus.
	N. 0°02'W., bet. secs. 16 and 17.
	Over heavily rolling land, through scattering timber and medium dense undergrowth.
1.60	Wash, 15 lks. wide, course S.60°W.; asc. 68 ft.
12.30	Top of ascent, desc. 11 ft.
14.88	U.S.L.M. No. 1797, as evidenced by a porphyry stone in place, 4x2x1 ft. above ground; a part of a ledge approx. 100 ft. long, 50 ft. wide, marked and witnessed as described in official record; bears N.40°38'E., 15.82 chs. dist.
14.90	Road, bears E. and W.
16.10	Wash, 30 lks. wide, course S.65°W.; asc. 68 ft.
34.90	Top of ascent; desc. 24 ft. over NW. slope.
36.30	Wash, 15 lks. wide, course S.60°W.; asc. 47 ft. over rolling SE. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$
	S17 S16
	1940
	raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.
	Desc. gradually over rolling land.
40.80	Wash, 10 lks. wide, course S.50°W.; asc. gradually.
43.20	Road, bears N.70°E. and S.70°W.; desc. 45 ft.
48.10	Wash, course S.70°W.; asc. 105 ft. over S. slope. Leave rolling, enter mountainous land, bears N.70°E. and S.70°W.
51.90	Point of short spur, slopes S.60°W.; desc. 48 ft. over N. slope.
54.90	Wash, 15 lks. wide, course SW.; asc. 128 ft. over SW. slope.
66.85	Top of ascent; desc. 41 ft.
69.90	Small drain, course S.60°W.; asc. 93 ft. over S. slope.
71.80	Spur, slopes S.75°W.; asc. 116 ft. over broken SW. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground, over a cross (+) marked on bedrock, and in a mound of stone to top, at cor. of secs. 8,9,16 and 17, with brass cap marked

## Subdivision of T. 6 N., R. 5 W.

328

Chains

T6N R5W  
 S 8 | S 9  
 S17 | S16

1940

Land, heavily rolling and mountainous.  
 Soil, gravelly, 3rd rate.  
 Timber, palo verde, ironwood and mesquite; undergrowth,  
 greasewood, cats claw and cactus.

S.89°50'E., on a random line bet. secs. 9 and 16.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.98 Intersect N. and S. line, 2 lks. S. of cor. of secs. 9,  
 10, 15 and 16.

Thence

N.89°51'W., on true line bet. secs. 9 and 16.

Over mountainous land, through scattering timber and  
 medium dense undergrowth.

Ascend 61 ft. over E. slope.

4.10 Spur, slopes S.15°E.; desc. 94 ft. over broken SW. slope.

17.50 Wash, 20 lks. wide, course S.15°E.; asc. 43 ft. over an  
 E. slope.

19.80 Spur, slopes S.10°E.; desc. 36 ft. over W. slope.

24.20 Wash, 60 lks. wide, course S.15°E.; asc. 40 ft. over  
 broken E. slope.

33.20 Ravine, course S.70°E.; asc. 64 ft. over broken E. slope.

39.99 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the  
 ground to bedrock, with + marked on bedrock at base of  
 post and in a mound of stone to top, at  $\frac{1}{4}$  sec. cor., with  
 brass cap marked

$\frac{1}{4}$   $\frac{S 9}{S 16}$

1940

Asc. 478 ft. over broken E. slope.

70.20 Saddle in rocky ridge, bears N.15°W. and S.15°E.; desc.  
 228 ft. over broken SW. slope.

79.98 The cor. of secs. 8, 9, 16 and 17.

Land, mountainous.  
 Soil, rocky, 4th rate.  
 Timber, ironwood, palo verde and mesquite; undergrowth,  
 greasewood, cactus, cats claw and sage brush.

N.0°02'W., bet. secs. 8 and 9.

Over mountainous land, through scattering timber and  
 medium dense undergrowth.

Ascend 42 ft. over broken SW. slope.

## Subdivision of T. 6 N., R. 5 W.

Chains	
2.70	Rocky spur, slopes S.70°W.; desc. 33 ft. along broken W. slope.
11.20	Drain, 10 lks. wide, course S.65°W.; asc. 449 ft. over broken SW. slope.
23.17	Precipitous ridge, bears N.20°W. and S.20°E.; thence along precipitous E. slope.
25.10	From this point precipitous east slope of Vulture Mountain renders chaining impracticable, therefore triangulate measurement as follows:  Set a flag at this point, designated as "A" and a flag ahead on line, designated as "B". Vertical angle to "B" is $+1\frac{1}{2}^{\circ}$ .  From "B" measure a base (the longest obtainable), N.58°48'W., 6.077 chs. to flag designated as "C", from which the flag at "A" bears S.13°51'E.  Included angles of the triangle "A-B-C" are 13°49', 121°14' and 44°57', the sum of which is 180°. <div style="text-align: right; margin-top: 10px;"> </div> Dist. chained on line bet. secs. 8 and 9 to "A" = 25.10 chs. N.0°02'W. Dist. triangulated from "A" to "B" = 17.98 " N.0°02'W. Total dist., cor. secs. 8, 9, 16 and 17, to "B" = 43.08 " N.0°02'W.  From triangulation point "B" chain return measurement S.0°02'E., 3.08 chs. to
40.00	Set an iron post, 3 ft. long, 1 in. diam. over a 6 inch cross (+) marked on solid surface rock, and in a mound of stone to top, at $\frac{1}{4}$ sec. cor., with brass cap marked  <div style="text-align: center; margin: 10px 0;"> <math>\frac{1}{4}</math>            S8 S9            1940         </div> Thence  N.0°02'W., chaining continued measurement, on line bet. secs. 8 and 9.  Asc. 173 ft. over broken SW. slope.
43.08	Triangulation point "B".
45.65	Rocky spur, slopes S.70°E.; desc. 186 ft. over broken E. slope, to sec. cor.
56.10	Base of SE. end of a vertical cliff, 250 ft. high, facing NE., extends N.10°W., approx. 15 chs.
65.00	Point from which crest of Vulture Mountain, approx. 300 ft. above line, bears W., approx. 2.50 chs. dist.

Subdivision of T. 6 N., R. 5 W.

Chains	Along E. slope.
80.00.	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, at the cor. of secs. 4, 5, 8 and 9, with brass cap marked
	$\begin{array}{c} T6N R5W \\ \hline S 5   S 4 \\ \hline S 8   S 9 \end{array}$
	1940
	raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.
	Land, mountainous. Soil, rocky, 4th rate. Timber, ironwood, mesquite and palo verde; undergrowth, greasewood, cats claw and cactus.
	S.89°51'E., on a random line bet. secs. 4 and 9.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.98	Intersect N. and S. line, 9 lks. N. of the cor. of secs. 3, 4, 9 and 10.
	Thence
	N.89°47'W., on true line bet. secs. 4 and 9.
	Over mountainous land, through scattering timber and undergrowth.
	Desc. gradually over NW. slope.
0.20	Ravine, course N.15°E.; asc. 32 ft. over E. slope.
2.00	Point of spur, slopes N.; desc. 43 ft. over W. slope.
3.95	Wash, 20 lks. wide, course N.50°E.; asc. 165 ft. over broken SE. slope.
14.40	Spur, slopes N.60°E.; desc. 70 ft. along broken N. slope.
23.40	Same spur, slopes S.60°E., from N.20°W.; desc. 70 ft. over W. slope.
27.40	Ravine, course S.15°E.; asc. 35 ft. over E. slope.
31.10	Ridge, bears N.20°W. and S.20°E.; desc. 37 ft. over broken S. slope.
37.60	Ravine, course S.; asc. 51 ft. over E. slope.
39.99	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S 4}{S 9}$
	1940
	raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.
	Asc. 32 ft. over E. slope.
41.10	Spur, slopes S.; desc. 46 ft. over W. slope.
44.40	Ravine, course S.; asc. 70 ft. over E. slope.

44.

## Subdivision of T. 6 N., R. 5 W.

Chains	
47.79	Spur, slopes S. 20° W.; desc. 85 ft. over NW. slope.
54.30	Ravine, course S. 15° E.; asc. 62 ft. over E. slope.
56.40	Short spur, slopes S.; desc. 33 ft. along broken S. slope.
64.70	Ravine, course S. 30° E.; asc. 315 ft. over broken E. slope.
67.80	Road, bears N. and S.
69.60	Mine shaft bears N., approx. 50 lks. dist.
79.98	The cor. of secs. 4, 5, 8 and 9.
	Land, mountainous. Soil, gravelly, 3rd rate. Timber, ironwood, palo verde and mesquite; undergrowth, greasewood, cats claw and cactus.
	N. 0° 02' W., on true line bet. secs. 4 and 5.
	Over heavily rolling land, through scattering timber and medium dense undergrowth.
	Asc. 36 ft. along broken E. slope.
5.60	Ridge, bears E. and W.; saddle in ridge bears E. 12 chs. dist.; desc. 299 ft. over N. slope.
38.60	Head of ravine, course E.; asc. 34 ft. over S. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bedrock, with + marked on bedrock at base of post and in a mound of stone to top, at $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$
	S5   S4
	1940
	Continue ascent over gradual S. slope.
40.80	Short spur, slopes E.; desc. 71 ft. over N. slope.
44.90	Ravine, course N. 60° E.; asc. 47 ft. along broken SE. slope.
54.70	Spur, slopes N. 70° E.; desc. 79 ft. over NW. slope.
61.10	Ravine, course E.; asc. 42 ft. over S. slope.
64.10	Spur, slopes N. 25° E.; desc. 83 ft. over broken NW. slope.
76.80	Ravine, near head, course NE.; asc. 38 ft. over S. slope.
79.48	Intersect S. bdy. of T. 7 N., R. 5 W.
	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, at closing cor. of secs. 4 and 5, with brass cap marked.

T7N R5W  
S32  
S5 | S4  
T6N R5W  
C C

1940

.Subdivision of T. 6 N., R. 5 W.

4028

Chains

raise a mound  
of stone, 3 ft. base, 2½ ft. high, S. of cor.

From point of intersection the ¼ sec. cor. of sec. 32 only on the S. bdy. of T. 7 N., R. 5 W., bears West, 18.125 chs. dist., as evidenced by an iron post, 1 in. diam., set, marked and witnessed as described in the field notes of a portion of the S. bdy. of T. 7 N., R. 5 W., resurveyed under this group.

Land, heavily rolling.  
Soil, gravelly, 3rd rate.  
Timber, ironwood, palo verde, mesquite and cats claw; undergrowth, greasewood, cats claw and cactus.

At midpoint on the N. bdy. of sec. 4

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at ¼ sec. cor. of sec. 4, with brass cap marked

¼ S 4  
1940

raise a mound  
of stone, 3 ft. base, 2½ ft. high, S. of cor.

From this corner, the cor. of secs. 32 and 33 only on the S. bdy. of T. 7 N., R. 5 W., bears West, 18.24 chs. dist., as evidenced by an iron post, 2 ins. diam., set, marked and witnessed as described in the field notes of a portion of the S. bdy. of T. 7 N., R. 5 W., resurveyed under this group.

From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of Tp., as evidenced by an iron post, 3 ins. diam., set, marked and witnessed as described in the official record.

N. 0° 03' W., bet. secs. 31 and 32.

Over rolling land, through scattering timber and medium dense undergrowth. Descend 22 ft. over a gradual NE. slope.

- 8.79 Wash, 20 lks. wide, course S. 30° E., from N. 50° W. Asc. 34 ft. over SW. slope.
- 12.60 Top of ascent; desc. 8 ft. over NW. slope.
- 14.00 Same wash, 20 lks. wide, course S. 20° W.; asc. 37 ft. over SE. slope.
- 39.79 Road, bears E. and W.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at ¼ sec. cor., with brass cap mkd.  
S 31 | S 32  
1940 from which  
An ironwood, 6 ins. diam., bears S. 42½° E., 215 lks. dist., marked ¼ S 32 B T.  
Raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor..
- 50.60 Wash, 15 lks. wide, course S. 30° E.
- 67.40 Wash, 10 lks. wide, course S. 15° E.; asc. 35 ft. over rolling land.

.Subdivision of T. 6 N., R. 5 W.

Chains  
80.00. Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, at cor. of secs. 29, 30, 31 and 32, with brass cap marked.

T6N R5W  
S30|S29  
S31|S32  
1940.

raise a mound  
of stone, 3 ft. base, 2½ ft. high, W. of cor.

Land, rolling.  
Soil, gravelly, 3rd rate.  
Timber, pale verde, ironweed and mesquite; undergrowth, greasewood, sagebrush, catsclaw and cactus.

---

S. 89° 59' E., on a random line bet. secs. 29 and 32.

40.00 Set temp. ¼ sec. cor.

80.00 Intersect N. and S. line, 9 lks. N. of the cor. of secs. 28, 29, 32 and 33.

Thence

N. 89° 55' W., on true line bet. secs. 29 and 32.

Over rolling land, through scattering timber and medium dense undergrowth.

~~14.95 Wash, 40 lks. wide, course S.~~

18.50 Wash, 30 lks. wide, course S.

28.10 Wash, 10 lks. wide, course S.

31.90 Wash, 20 lks. wide, course S.; asc. 43 ft. over E. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground over a cross (+) marked on bedrock, and in a mound of stone to top, at ¼ sec. cor., with brass cap marked

S 29  
+ S 32  
1940

Ascend gradually over NE. slope.

41.30 Low ridge, bears N. 10° W. and S. 10° E.; desc. 69 ft. over SW. slope.

55.40 Wash, 20 lks. wide, course S.; asc. 16 ft.

57.50 Top of ascent; desc. 21 ft.

69.72 Junction of two washes, 60 lks. wide, from N. 10° E. and N. 30° W., course S.; asc. 14 ft. over rolling land.

74.00 Old road, bears S. and N. 30° E.

80.00 The cor. of secs. 29, 30, 31 and 32.

Land, rolling.  
Soil, gravelly, 3rd rate.  
Timber, palo verde and mesquite; undergrowth, cats claw, and cactus.

---



Chains	N.89°59'W., on a random line bet. secs. 30 and 31.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.00	Intersect W. bdy. of tp., 2 lks. N. of cor. of secs. 25, 30, 31 and 36.
	Thence
	East, on true line bet. secs. 30 and 31.
	Over rolling land, through scattering timber and medium dense undergrowth.
	Desc. 36 ft.
3.10	Road, bears N.10°W., and S.15°E.
7.83	Intersect line 1-4 of Vulture North Extension No. 14, surveyed but unpatented mining claim, Survey No. 4147, at a point, 7.03 chs. N.7°46'E. of cor. No. 1, as evidenced by a galvanized iron pipe, 18 ins. above ground, supported by a mound of stone and earth, with $3\frac{1}{2}$ in. copper disc. in top, marked as described in the official record.
	From the same point, cor. No. 4 of this claim as evidenced by a galvanized iron pipe, 18 ins. above ground, supported by a mound of stone and earth, with $3\frac{1}{2}$ in. copper disc. in top, marked as described in the official record, bears N.7°46'E., 15.38 chs. dist., Leave surveyed but unpatented land.
15.30	Wash, 10 lks. wide, course S.
25.90	Wash, 30 lks. wide, course S.20°E.; asc. 25 ft. over W. slope.
28.00	Point of rocky spur, slopes S.
31.70	Wash, 20 lks. wide, course S.; asc. 68 ft.
33.90	Buckeye-Wickenburg highway bears N.8 $\frac{1}{4}$ °W. and S.8 $\frac{1}{4}$ °E.
37.90	Wash, 10 lks. wide, course S.10°W.; asc. 12 ft.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S \ 30}{S \ 31}$
	1940
	raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.
	Desc. 64 ft. over rolling land.
47.90	Wash, 15 lks. wide, course S.
58.60	Wash, 20 lks. wide, course S.
72.40	Wash, 60 lks. wide, course S.10°E.
75.60	Road, bears N.35°E. and S.13°W.
80.00	The cor. of secs. 29, 30, 31 and 32.
	Land, rolling.
	Soil, gravelly, 3rd rate.
	Timber, ironwood, mesquite, palo verde and cats claw; undergrowth, greasewood, cats claw and cactus.

## Subdivision of T. 6 N., R. 5 W.

Chains	
	N.0°03'W., bet. secs. 29 and 30.
	Over rolling land, through scattering timber and medium dense undergrowth.
6.00	Road, bears N.31 $\frac{3}{4}$ °E., and S.35 $\frac{1}{4}$ °W.
18.00	Wash, 60 lks. wide, course S.20°W.
25.00	Wash, 30 lks. wide, S.30°E.; junction with above wash approx. 1 ch. S.30°E.
35.40	Wash, 10 lks. wide, course S.10°E.
40.00	Set an iron post, 3 ft. long, 1 in. diam.; 28 ins. in the ground, at $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$
	S30 S29
	1940
	raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.
	Continue over rolling land.
45.10	Ravine, course E.
50.30	Wash, 15 lks. wide; course E.
54.20	Junction of two washes, 50 lks. wide, from N.20°W. and N.20°E., course S.10°E.
63.00	Wash, 15 lks. wide, course S.30°W.
65.80	Wash, 20 lks. wide, course S.15°E.
78.30	Wash, 15 lks. wide, course S.30°W.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, at cor. of secs. 19,20,29 and 30, with brass cap marked
	T6N R5W S19 S20 S30 S29
	1940
	raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.
	Land, rolling. Soil, gravelly, 3rd rate. Timber, ironwood, mesquite and palo verde; undergrowth, greasewood, cats claw and cactus.
	S.89°55'E., on a random line bet. secs. 20 and 29.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.04	Intersect N. and S. line, 5 lks. S. of the cor. of secs. 20,21,28 and 29.
	Thence
	N.89°57'W., on true line bet. secs. 20 and 29.

Chains	
	Over rolling land, through scattering timber and medium dense undergrowth.
13.65	Wash, 15 lks. wide, course S.15°E.
22.15	Wash, 30 lks. wide, course S.10°W.
38.15	Junction of washes, 20 lks. wide, from N.30°W. and N.30°E.; thence course of wash is S.
40.02	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S \ 20}{S \ 29}$ 1940 raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.
	Continue over rolling land..
43.55	Wash, 10 lks. wide, course S.30°E., from N.
49.25	Road, S.22°W. and N.5°E.
61.25	Wash, 50 lks. wide, course S.10°E..
67.05	Wash, 10 lks. wide, course S.10°W.
70.25	Wash, 40 lks. wide, course S.; asc. 107 ft. over S. slope.
73.55	Point of flat spur, slopes SE.; desc. 48 ft. over SW. slope.
78.55	Wash, 20 lks. wide, course S.; thence over rolling land.
80.04	Cor. of secs. 19,20,29 and 30.
	Land, rolling. Soil, gravelly, 3rd rate. Timber, ironwood, mesquite and palo verde; undergrowth, greasewood, cats claw and cactus.
	-----
	West, on a random line bet. secs. 19 and 30.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.93	Intersect W. bdy. of tp., 7 lks. N. of the cor. of secs. 19,24,25 and 30.
	Thence
	N.89°57'E., on true line bet. secs. 19 and 30.
	Over rolling land, through scattering timber and undergrowth.
16.70	Wash, 30 lks. wide, course S.10°E.; asc. 62 ft. over SW. slope.
27.00	Short spur, slopes S.10°E.; desc. 77 ft. over SE. slope.
30.00	Buckeye-Wickenburg highway, bears N.3 $\frac{3}{4}$ °W. and S.3 $\frac{3}{4}$ °E.
35.00	Wash, 10 lks. wide, course S.10°W.; asc. 31 ft.

## Subdivision of T. 6 N., R. 5 W.

Chains	
39.93	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S 19}{S 30}$
	1940 raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, N. of cor.
	Desc. 17 ft. over rolling land.
41.00	Wash, 15 lks. wide, course S.15°W.; asc. 34 ft.
47.70	Desc. 40 ft. over rolling land.
50.40	Wash, 40 lks. wide, course S.10°E.; asc. 57 ft. over SW. slope.
55.30	Flat spur, slopes S.; desc. 32 ft. over SE. slope.
68.10	Wash, 20 lks. wide, course S.10°E.; asc. 32 ft.
75.30	Desc. 14 ft. over rolling land.
76.60	Wash, 30 lks. wide, course S.20°E.; asc. 14 ft. over rolling land.
79.93	The cor. of secs. 19, 20, 29 and 30. Land, rolling. Soil, gravelly, 3rd rate. Timber, ironwood, palo verde and mesquite; undergrowth, greasewood, cats claw and cactus.
	N.0°03'W., bet. secs. 19 and 20.
	Over rolling land, through scattering timber and medium dense undergrowth.
7.50	Small drain, course S.15°E.; asc. 35 ft. over SW. slope. Leave rolling, enter heavily rolling land, bears NW. and SE.
16.00	Spur, slopes S.30°E.; asc. 125 ft. over SE. slope.
23.47	SW. cor. of Syndicate Mine hoist, bears N.33°45'E; NW. cor. of a cabin, bears N.27°21'E.
23.77	Short spur, slopes E.; desc. 117 ft. over NE. slope.
31.19	Road, bears N.60°W. and S.60°E.
33.05	Wash, 15 lks. wide, course SE.; asc. 47 ft. over SW. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S 19   S 20}{S 30}$
	1940 raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, W. of cor.
	Over heavily rolling land; asc. 251 ft. over SW. slope.

## Subdivision of T. 6 N., R. 5 W.

## Chains

- 60.23 Rocky spur, slopes S.30°E.; desc. 102 ft. over NE. slope.  
 68.19 Small drain, course E.; asc. 57 ft. over SE. slope.  
 75.26 Point of short spur, slopes E.; desc. 18 ft. over NE. slope.  
 77.14 Small drain, course S.60°E.; asc. gradually over NE. slope.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, at cor. of secs. 17,18,19 and 20, with brass cap marked

T6N	R5W
S18	S17
S19	S20

1940

raise a mound  
 of stone, 3 ft. base, 2½ ft. high, W. of cor.

From this cor., SW. cor. of Syndicate Mine hoist, bears S.48°44'E.; NW. of cor. of cabin brs. S.52°07'E.

Land, rolling and heavily rolling.  
 Soil, gravelly, 3rd rate.  
 Timber, ironwood, mesquite and palo verde; undergrowth, greasewood, cats claw and cactus.

S.89°57'E., bet. secs. 17 and 20, on random line.

- 40.00 Set temp. ¼ sec. cor.  
 80.04 Intersect N. and S. line, 5 lks. N. of the cor. of secs. 16,17,20 and 21.

Thence

N.89°55'W., on true line bet. secs. 17 and 20.

Over rolling land, through scattering timber and medium dense undergrowth.

- 0.25 Wash, 10 lks. wide, course S.15°E.  
 5.75 Road, bears N.10°W. and S.10°E.  
 15.25 Wash, 50 lks. wide, course S., at junction with washes from N.15°W. and N.10°E. Asc. gradually.  
 19.50 Top of ascent; desc. 61 ft. over W. slope.  
 26.75 Wash, 40 lks. wide, at junction with washes from N. and N.15°E., course S.  
 35.95 Road, bears N.10°W. and S.  
 40.02 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at ¼ sec. cor., with brass cap marked

¼	S 17
	S 20

1940

raise a mound  
 of stone, 4 ft. base, 3 ft. high, N. of cor.

## Subdivision of T. 6 N., R. 5 W.

Chains	
	Continue over rolling land.
41.35	Wash, 60 lks. wide, course S.36°E.
63.35	Road, bears N.8°W. and S.29°E.
66.85	Wash, 20 lks. wide, course S.
76.05	Wash, 10 lks. wide, course S.10°E.; asc. 23 ft. over NE. slope.
80.04	The cor. of secs. 17, 18, 19 and 20. Land, rolling. Soil, gravelly, 3rd rate. Timber, ironwood, palo verde and mesquite; undergrowth, greasewood, cats claw and cactus.
	----- S.89°57'W., on a random line bet. secs. 18 and 19.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.93	Intersect W. bdy. of tp., 9 lks. N. of the cor. of secs. 13, 18, 19 and 24. Thence N.89°53'E., on true line bet. secs. 18 and 19. Over heavily rolling land, through scattering timber and medium dense undergrowth.
8.40	Telephone line, bears NE. and SW.
10.60	Buckeye-Wickenburg highway, bears N.9°E. and S.1°E. Desc. 21 ft.
16.80	Wash, 40 lks. wide, course S.15°E.; asc. 95 ft. over broken SW. slope.
28.60	Spur, slopes S.40°W., from N.; desc. 33 ft. over SE. slope.
32.00	Wash, course S.10°E.; asc. 72 ft. over SW. slope.
32.37	Dim road, bears N.60°E. and S.60°W.
39.40	Spur, slopes S.; desc. 9 ft. over broken NE. slope.
39.93	Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground over a cross (+) marked on bedrock, and in a mound of stone to top, at $\frac{1}{4}$ sec. cor., with brass cap marked $\frac{1}{4} \frac{S 18}{S 19}$ 1940 Desc. 67 ft. over broken NE. slope.
44.40	Ravine, course S. Thence along S. slope.
48.40	Ravine, course S.40°W.; asc. 105 ft. over broken W. slope.
65.10	Ridge, bears N. and S.; desc. 56 ft. over NE. slope.
68.30	Head of ravine, course N.30°E.; asc. 81 ft. over NW. slope.
73.65	Spur, slopes N.; desc. 114 ft. over NE. slope.

Chains

- 79.93 The cor. of secs. 17, 18, 19 and 20.
- Land, heavily rolling.  
Soil, gravelly and rocky, 3rd and 4th rates.  
Timber, ironwood, palo verde and mesquite; undergrowth,  
greasewood, cats claw, sagebrush and cactus.
- 
- N.0°03'W., bet. secs. 17 and 18.
- Over mountainous land, through scattering timber and  
medium dense undergrowth.
- Desc. 42 ft. over NE. slope.
- 8.70 Wash, 10 lks. wide, course S.15°E.; asc. 210 ft. over  
broken S. slope.
- 21.85 Spur, slopes E.; desc. 133 ft. over N. slope.
- 32.00 Wash, 20 lks. wide, course S.70°E.; asc. 19 ft. over  
broken SE. slope.
- 40.00 Set an iron post, 3 ft. long; 1 in. diam., 28 ins. in the  
ground, at  $\frac{1}{4}$  sec. cor., with brass cap marked
- $\frac{1}{4}$
- S18|S17
- 1940
- raise a mound  
of stone; 2 $\frac{1}{2}$  ft. base, 2 $\frac{1}{2}$  ft. high, W. of cor.
- Continue ascent 73 ft. over broken SE. slope.
- 45.50 Spur, slopes E.; desc. 75 ft. over NE. slope.
- 49.90 Wash, 10 lks. wide, course S.20°E.; asc. 29 ft. over  
broken land.
- 57.00 Top of ascent; desc. 31 ft. over a NE. slope.
- 58.15 Ravine, course S.70°E.; asc. 23 ft. over broken SE. slope.
- 65.65 Point of spur, slopes N.70°E.; desc. 51 ft. over broken  
NE. slope.
- 68.65 Ravine, course SE.; asc. 37 ft. over broken S. slope.
- 73.80 Point of spur, slopes S.60°E.; desc. 39 ft. over NE.  
slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in  
the ground, at cor. of secs. 7, 8, 17 and 18; with brass  
cap marked
- T6N R5W  
S 7 | S 8  
S18 | S17
- 1940
- raise a mound  
of stone, 3 ft. base, 2 $\frac{1}{2}$  ft. high, W. of cor.
- Land, mountainous.  
Soil, gravelly and rocky, 3rd and 4th rates.  
Timber, ironwood, palo verde and mesquite; undergrowth,  
greasewood, cats claw, sagebrush and cactus.

## Subdivision of T. 6 N., R. 5 W.

Chains	
	S.89°55'E., on a random line bet. secs. 8 and 17.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.08	Intersect N. and S. line, 9 lks. S. of the cor. of secs. 8, 9, 16 and 17.
	Thence
	N.89°59'W., on true line bet. secs. 8 and 17.
	Over mountainous land, through scattering timber and undergrowth; desc. 18 ft. over NW. slope.
1.60	Head of drain, course S.15°W.; asc. 51 ft. over SE. slope.
5.30	Short, rocky spur, slopes S.75°W.; desc. 184 ft. over W. slope.
14.20	Ravine, course S.; asc. 14 ft. over SE. slope.
18.70	Spur, slopes S.15°W.; desc. 55 ft. over W. slope.
24.20	Wash, 15 lks. wide, course S.60°W.; asc. 17 ft.
25.30	Top of ascent; desc. 136 ft. along broken SW. slope.
34.80	Wash, 10 lks. wide, course S.40°W.; asc. 59 ft. over broken SE. slope.
38.90	Top of ascent; desc. 16 ft. over broken SW. slope.
39.90	Wash, 15 lks. wide, course S.15°W.
40.04	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S 8}{S 17}$
	1940
	raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.
	Asc. 9 ft. over broken land.
41.75	Desc. 51 ft. over broken SW. slope.
45.40	Ravine, course S.40°W.; asc. 22 ft.
48.20	Desc. 33 ft. along broken SW. slope.
53.20	Wash, 20 lks. wide, course S.; asc. 33 ft.
56.70	Desc. 56 ft. over broken land.
74.40	Wash, 30 lks. wide, course S.20°W.
75.98	Wash, 60 lks. wide, course S.4 $\frac{1}{2}$ °E. Road in wash, bears N.26°W. and S.4 $\frac{1}{2}$ °E. Asc. 57 ft. over NE. slope.
80.08	The cor. of secs. 7, 8, 17 and 18.
	Land, mountainous. Soil, gravelly and rocky, 3rd and 4th rates. Timber, ironwood, palo verde and mesquite; undergrowth, greasewood, cats claw, sagebrush and cactus.



## Subdivision of T. 6 N., R. 5 W.

Chains	
	S.89°53'W., on a random line bet. secs. 7 and 18.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.76	Intersect W. bdy. of tp. at the cor. of secs. 7,12,13 and 18.
	Thence
	N.89°53'E., on true line bet. secs. 7 and 18.
	Over mountainous land, through scattering timber and medium dense undergrowth.
	Asc. 12 ft. over SW. slope.
1.30	Spur, slopes S.20°E.; desc. 48 ft. over E. slope.
7.35	Wash, 40 lks. wide, course S.10°E.; asc. 55 ft. over broken SW. slope.
11.00	Two wire telephone line, bears N. and S.
14.40	Point of spur, slopes S.15°E.; desc. 43 ft. over broken E. slope.
18.20	Wash, 20 lks. wide, course S.; asc. 49 ft. over broken W. slope.
24.40	Short spur, slopes S.10°W.; desc. 17 ft. over SE. slope.
29.80	Ravine, course S.30°W.; asc. 86 ft. over broken W. slope.
36.80	Point of spur, slopes S.20°W.; desc. 33 ft. over SE. slope.
39.70	Ravine, course S.40°W.; asc. 14 ft. over broken W. slope.
39.76	Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bedrock, with cross (+) marked on bedrock at the base and in a mound of stone to top, at $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S 7}{S 18}$
	.1940
	Continue ascent 183 ft. over broken W. slope.
53.90	Ridge, bears N.10°W. and S.20°W.; desc. 163 ft. over broken E. slope.
68.80	Ravine, course S.15°E.; asc. 53 ft. over W. slope.
72.60	Spur, slopes S.30°E.; desc. 134 ft. over NE. slope.
79.76	The cor. of secs. 7,8,17 and 18.
	Land, mountainous. Soil, gravelly and rocky, 3rd rate. Timber, ironwood, palo verde and mesquite; undergrowth, greasewood, cats claw, sagebrush and cactus.
	----- N.0°03'W., bet. secs. 7 and 8.
	Over heavily rolling land, through scattering timber and undergrowth.
	Desc. 17 ft. over NE. slope.

Chains	
7.50	Road, bears N. $18\frac{1}{4}^\circ$ W. and S. $18\frac{1}{4}^\circ$ E., in wash, 100 lks. wide, course S. $18\frac{1}{4}^\circ$ E. Asc. 76 ft.
16.60	Thence desc, 30 ft.
19.30	Wash, 20 lks. wide, course S. $20^\circ$ E.; asc. 58 ft.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at $\frac{1}{4}$ sec. cor., with brass cap marked.
	$\frac{1}{4}$ S7 S8 1940
	raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.
	Continue over rolling land.
47.50	Ravine, course S. $70^\circ$ W.; asc. 40 ft. along broken SW. slope.
56.60	Point of spur, slopes S. $60^\circ$ W.; desc. 25 ft.
58.80	Ravine, course S. $30^\circ$ W.; asc. 8 ft.
59.80	Dim road, bears N. $60^\circ$ E. and S. $60^\circ$ W.; desc. 26 ft.
63.45	Ravine, course S. $50^\circ$ W.; asc. 52 ft. over broken W. slope.
69.60	Wash, 40 lks. wide, course S. $70^\circ$ W.; asc. 28 ft. over broken S. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, at cor. of secs. 5, 6, 7 and 8, with brass cap marked.
	T6N R5W S 6   S 5 S 7   S 8
	1940
	Land, heavily rolling. Soil, gravelly, 3rd rate. Timber, ironwood, palo verde, mesquite; undergrowth, sage brush, greasewood, cats claw and cacti.
	S. $89^\circ 59'$ E., on a random line bet. secs. 5 and 8.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.08	Intersect N. and S. line, 9 lks. S. of the cor. of secs. 4, 5, 8 and 9.
	Thence
	S. $89^\circ 57'$ W., on true line bet. secs. 5 and 8.
	Over mountainous land, through scattering timber and undergrowth.
	Asc. 184 ft. over broken E. slope.
5.10	Precipitous ridge, bears N. and S.; desc. 186 ft. over NW. slope.

Chains	
11.20	Head of ravine, course N.15°W.; asc. 20 ft. over NE. slope.
12.70	Short, rocky spur, slopes N.; desc. 277 ft. over broken NW. slope, to ravine.
13.00	Base of vertical cliff, approx. 80 ft. high, extends 2 chs. N., 5 chs. S.
21.90	Head of a ravine, course S.10°W.; desc. 132 ft. over broken SW. slope.
39.40	Ravine, course S.; asc. 12 ft. over an E. slope.
40.04	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S \ 5}{S \ 8}$
	1940 raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor. Asc. 207 ft. over SE. slope.
52.90	Rocky point, thence along broken S. slope.
55.50	Spur, slopes S.; desc. 95 ft. over SW. slope.
58.60	Head of ravine, course S.10°W.; asc. 24 ft. over SE. slope.
60.40	Spur, slopes S.15°W.; desc. 212 ft. over SW. slope.
74.90	Head of a ravine, course S.30°W.; asc. along broken S. slope.
80.08	The cor. of secs. 5,6,7 and 8.
	Land, mountainous. Soil, gravelly and rocky, 3rd and 4th rates. Timber, ironwood, palo verde and mesquite; undergrowth, greasewood, cats claw and cactus.
	S:89°53'W., on a random line bet. secs. 6 and 7.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.74	Intersect W. bdy. of tp., 2 lks. S. of the cor. of secs. 1,6,7 and 12.
	Thence N.89°54'E., on true line bet. secs. 6 and 7.
	Over rolling land, through scattering timber and medium dense undergrowth.
3.54	Road, in wash, course SE.; bears N.83°W. and S.67 $\frac{3}{4}$ °E.
18.85	Wash, 20 lks. wide, course S.15°E.
30.05	Wash, 30 lks. wide, course S.; asc. 148 ft. over broken SW. slope.
39.74	Sharp spur, slopes S.35°E.

## Subdivision of T. 6 N., R. 5 W.

Chains	
39.74	Set a brass tablet, $3\frac{1}{2}$ ins. diam., 3 ins. stem in rock ledge, at $\frac{1}{4}$ sec. cor., with top marked
	$\frac{1}{4} \begin{array}{c} S 6 \\ S 7 \end{array}$
	1940
	. . . . . raise a mound of stone, 5 ft. base, 4 ft. high, N. of cor.
	Desc. 138 ft. over E. slope.
44.30	Buckeye-Wickenburg highway, bears N.30°W. and S.28 $\frac{1}{4}$ °E.
49.25	Ravine, course S.15°E.; thence over broken land.
49.75	Telephone line, bears N.20°E. and S.20°W.
58.30	Road, bears N.19 $\frac{1}{4}$ °E. and S.19 $\frac{1}{4}$ °W.
59.45	Wash, 40 lks. wide, course S.10°E.
74.95	Ravine, course S.; thence along broken S. slope.
79.74	The cor. of secs. 5, 6, 7 and 8.
	Land, rolling and broken.
	Soil, gravelly and rocky, 3rd and 4th rates.
	Timber, ironwood, palo verde and mesquite; undergrowth,
	sagebrush, greasewood, cats claw and cactus.
	----- N. 0°03'W., on true line bet. secs. 5 and 6.
	Over mountainous land, through scattering timber and dense undergrowth.
	Asc. 53 ft. over broken S. slope.
8.60	Spur, slopes S.70°W.; desc. 14 ft. over NW. slope.
19.00	Wash, 40 lks. wide, course S.60°W.; asc. 144 ft. over broken S. slope.
27.90	Spur, slopes S.60°W.; desc. 103 ft. over broken W. slope.
34.60	Wash, 15 lks. wide, course S.80°W.; asc. 16 ft. along broken W. slope.
37.20	Top of ascent; desc. 12 ft.
39.50	Head of small drain, course W.; thence along broken W. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at $\frac{1}{4}$ sec. cor., with brass cap marked.
	$\frac{1}{4}$
	S6 S5
	1940
	. . . . . raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.
	Continue along broken W. slope.
46.70	Wash, 20 lks. wide, course S.60°W.; along broken SW. slope.

## Subdivision of T. 6 N., R. 5 W.

4007 4008

- Chains  
 56.30 Wash, 30 lks. wide, course W.; asc. 32 ft. along broken SW. slope.  
 66.90 Small drain; near head, course S. 10° W.; asc. 41 ft. along broken SW. slope.  
 77.30 Top of ascent; desc. 28 ft.  
 78.60 Wash, 20 lks. wide, course S. 10° W.; asc. 28 ft. over E. slope.  
 79.50 Intersect S. bdy. of T. 7 N., R. 5 W.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, at closing corner of secs. 5 and 6, with brass cap marked

T7N R5W

S31

S6 | S5

T6N R5W

C C

1940

raise a mound  
 of stone, 4 ft. base, 2½ ft. high, S. of cor.

From point of intersection, the ¼ sec. cor. of sec. 31 only, on the S. bdy. of T. 7 N., R. 5 W., bears West, 17.65 chs. dist., as evidenced by an iron post, 1 in. diam. set, marked and witnessed as described in the field notes of a portion of the S. bdy. of T. 7 N., R. 5 W., resurveyed under this group.

Land, mountainous.

Soil, gravelly, 3rd rate.

Timber, ironwood, palo verde and mesquite; undergrowth, greasewood, sage brush and cactus.

-----  
 At midpoint on the N. bdy. of sec. 5

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at ¼ sec. cor. of sec. 5, with brass cap marked

¼ S 5  
 1940

raise a mound  
 of stone, 3 ft. base, 2½ ft. high, S. of cor.

From this corner, the cor. of secs. 31 and 32 only on the S. bdy. of T. 7 N., R. 5 W., bears West, 17.89 chs. dist., as evidenced by an iron post, 2 ins. diam., set, marked, and witnessed as described in the field notes of a portion of the S. bdy. of T. 7 N., R. 5 W., resurveyed under this group.

At a point on the N. bdy. of sec. 6, 40.00 chs. West of the closing corner of secs. 5 and 6.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, at ¼ sec. cor. of sec. 6, with brass cap marked

¼ S 6  
 1940

raise a mound  
 of stone, 3 ft. base, 2½ ft. high, S. of cor.

From this corner, the SW. cor. of T. 7 N., R. 5 W., bears West, 17.51 chs. dist.; as evidenced by an iron post, 2 ins. diam., set, marked and witnessed as described in the official record.  
 -----

FINAL TEST OF INSTRUMENT.

March 3, 1940, at station in camp near the center of sec. 31, T. 6 N., R. 5 W., G. & S. R. M., in latitude 33° 49' N.; longitude 112° 49' 10" W.;; examine the adjustments of Gurley transit No. 371537 and find no errors. Watch reads correct 105th meridian standard time, as checked by radio signals. To test the solar apparatus of this instrument by comparison of its indications with the true meridian, proceed as follows:

Make an hour angle observation on Polaris east of the meridian, making four observations, two each with the telescope in direct and reversed positions and reading the deflection angles from Polaris to the center of a sahuaro cactus, on top of a hill about two miles north.

Mean watch time of observations, a.m.	9h 00m 42s
Watch fast of l.m.t.	31m 17s
Azimuth of Polaris	1° 12' 42"
Mean horizontal angle from Polaris W. to reference point	0° 08' 00"
True bearing of reference point	N. 1° 04' 42" E.

March 3, 1940, at 9h 00m, a.m., app. t., set off 33° 49' N. on the lat. arc, 6° 40½' S. on the decl. arc and determine a meridian with the solar, which agrees with the true meridian.

At app. noon, with the lat. arc unchanged, observe the sun on the meridian and obtain a reading of 6° 38' S. on the decl. arc, which agrees with the computed decl. of the sun.

At 3h 00m, p.m., app. t., with the lat. arc unchanged, set off 6° 34½' S. on the decl. arc and determine a meridian with the solar, which agrees with the true meridian.

As all of the solar observations made during the usual hours of solar work come within 1' 30" of the true meridian, conclude that this instrument is in satisfactory adjustment on this date.

GENERAL DESCRIPTION.

T. 6 N., R. 5 W., is situated about seven miles southwest of Wickenburg, Arizona. The northern portion is mountainous being in the Vulture Mountains, and the southern portion is rolling. Vulture Peak, which is the highest point in the township, is in the NE. ¼ of sec. 8. The elevation ranges from 1800 to 3600 ft. above sea level.

The soil is poor quality, being gravelly and rocky, 3rd rate.

There is a fair stand of native grasses in the area, which affords forage for a limited number of cattle. The timber is scattering ironwood, palo verde and mesquite, with an undergrowth of greasewood, sagebrush, cat's claw and cactus. There are no permanent sources of water in the township. Mineralization is evident. There is a group of mining claims, some of which are patented, in the west half of secs. 30 and 31. There are also two claims in the SW. ¼ of sec. 16, and an old mine dump in the NE. ¼ of sec. 25.

A graded highway, which leads to Wickenburg, traverses the township, through secs: 6, 7, 18, 19, 30 and 31. There are also several secondary roads through the rolling country in the southern portion. There is no permanent settlement in the township.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GENERAL LAND OFFICE

FIELD ASSISTANTS

NAMES	CAPACITY
Benjamin J. Mollette	Principal Assistant
Leroy Lewis	Principal Assistant
Roy Mashburn	Flagman
Clifford Cline	Chainman
Clifford Jones	Moundsman
Lavern Palmer	Axeman

62

BOOK 4328

CERTIFICATE OF SURVEYOR

I, Raymond F. Moss, Assistant Cadastral Engineer, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 13th day of July, 1939 received from the district cadastral engineer for Arizona, with assignment instructions dated November 22, 1939, I have ~~surveyed~~ resurveyed a portion of the East Boundary and surveyed the West Boundary and Subdivisional Lines of Township 6 North, Range 5 West

of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said resurvey and survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

Phoenix, Arizona  
January 31, 1942

Raymond F. Moss  
Assistant Cadastral Engineer  
(formerly Public Land Surveyor)

CERTIFICATE OF APPROVAL

OFFICE OF SUPERVISOR OF SURVEYS,  
Denver, Colorado, July 13, 19 45.

The foregoing field notes of the ~~survey of~~ resurvey of a portion of the East Boundary and survey of the West Boundary and Subdivisional Lines of Township 6 North, Range 5 West of the Gila and Salt River Meridian, in the State of Arizona,

executed by Raymond F. Moss, Public Land Surveyor, General Land Office, under special instructions dated July 13, 1939, and assignment instructions dated November 22, 1939, having been critically examined, and the necessary corrections made prior to their certification by the engineer, the said field notes, and the survey and resurvey therein described, are hereby approved.

[Signature]  
Supervisor of Surveys.

CERTIFICATE OF TRANSCRIPT

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~  
~~is a true copy of the original field notes on file in the public survey office.~~

Supervisor of Surveys.