

(1)

BOOK 4435

ORIGINAL
UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF RECLAMATION

4435

FIELD NOTES

Of the Supplemental Survey of the N 1/2 of Section 1;
the NE 1/4 of Section 3; the SE 1/4 of Section 8 and the N 1/2 of Section 17

Township 8 South, Range 16 West
Of the G. & S. R. Meridian, In the State of Arizona

EXECUTED BY

Albin H. Wadin, General Engineer
United States Bureau of Reclamation

Under authority of Departmental Instructions of October 24, 1906.


Survey Commenced February 12 19 54

Survey Completed October 7 19 54

4435

INDEX DIAGRAM

Township 8 South, Range 16 West

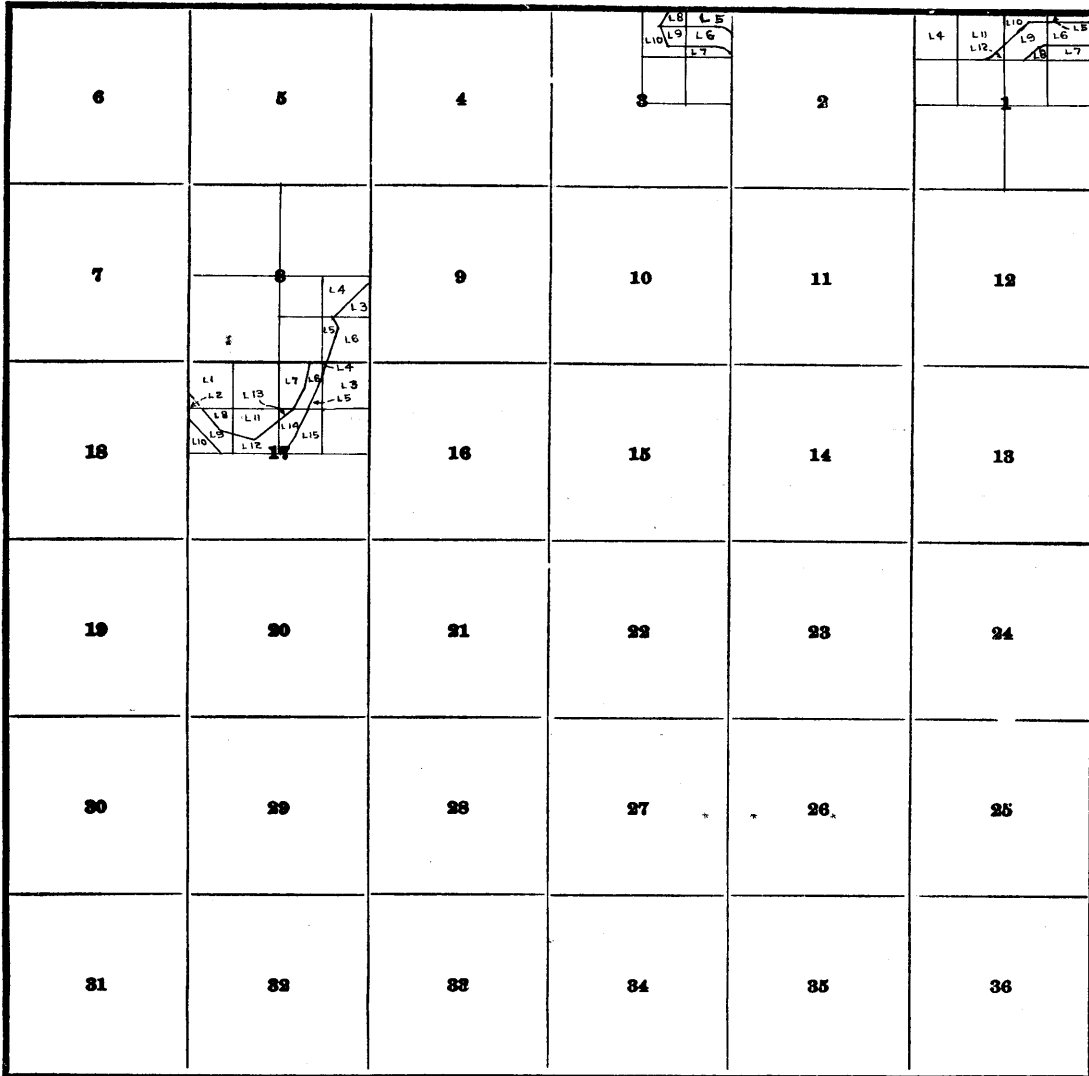

FIELD ASSISTANTS





NAMES	CAPACITY
E. A. Haley	
W. Barcus	Chief of Party
A. Lorona	Instrumentman
T. Romero	Chairman
T. Sanchez	Chairman
A. Norton	Axman

TOWNSHIP 8 SOUTH, RANGE 16 WEST
 GILA & SALT RIVER MERIDIAN
 ARIZONA

13

PAGE INDEX DIAGRAM

BOOK 4485

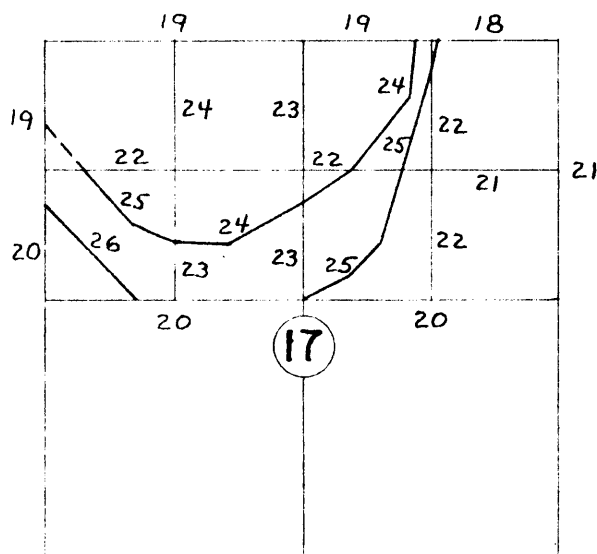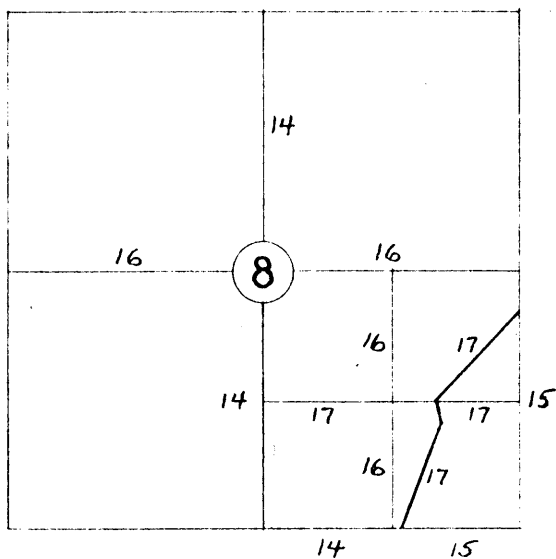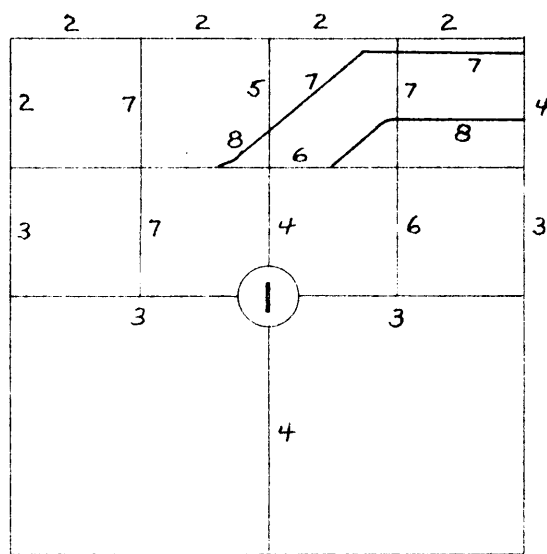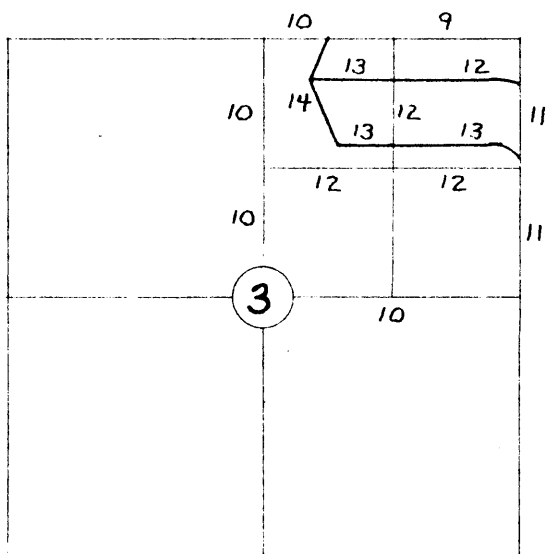

Supplemental Survey
of
Sections 1, 3, 8, and 17
Township 8 South, Range 16 W.,
G. & S. R. M., Ariz.

BOOK 4438

10

The township lines in Township 8 South, Range 16 West, Gila and Salt River Meridian, Arizona were surveyed by T. F. White in March, 1877 and the subdivisions were surveyed by J. L. Harris in January, 1878. The Plat was approved on April 1, 1878. A limited retracement and subdivision of Secs. 4 and 8, and the survey of Tracts 37 and 38 were executed by Clark Gumm, Cadastral Engineer, Bureau of Land Management, in April, 1952. The Plat was approved July 7, 1952. A Supplemental Survey of the NW $\frac{1}{4}$ of Sec. 17 was executed by Albin H. Wadin, Bureau of Reclamation Engineer, in May, 1952. The Plat was approved July 17, 1953.

The purpose of this survey is to subdivide the N $\frac{1}{2}$ of Sec. 1, the NE $\frac{1}{4}$ of Sec. 3, the SE $\frac{1}{4}$ of Sec. 8 and the N $\frac{1}{2}$ of Sec. 17 into legal subdivisions and fractional lots to accommodate farm units to be established in connection with the development of the Wellton-Mohawk Division of the Gila Project, Arizona, a Federal Reclamation Project.

Lands in this area have been settled and farmed for many years. Private surveyors have retraced many of the subdivision lines and have re-established and replaced the original corner monuments to perpetuate the monuments and locations. Original corner monuments have been replaced with 4 in. by 4 in. redwood posts set at the proper locations and properly inscribed. The Bureau of Reclamation, in planning and pre-construction surveys, has replaced the redwood posts and other deteriorated monuments with iron posts with brass caps of accepted standards. The brass caps are marked "Bureau of Reclamation Penalty \$250 for Removal" and are stamped with the appropriate corner markings. The monuments and locations have been recognized and accepted without controversy.

The survey was executed with a Keuffel & Esser transit, serial number 61535, which is provided with double verniers reading to 30 seconds of arc. The instrument was examined and tested and found to be in good condition and adjustment.

Bearings established and used by the Bureau of Reclamation in this area are based on the U. S. C. & G. S. Western Arizona Grid System whose central meridian in this zone is 113° 45' west longitude. The bearings in this survey have been corrected to the true meridian and are shown as true bearings and true lines.

Survey of Lots 5, 6, 7, 8, 9, 10, 11 and 12 in the N $\frac{1}{2}$ of Section 1,
T. 8 S., R. 16W., G. & S. R. M., Arizona

The survey in this section was executed with the purpose of further subdividing the N $\frac{1}{2}$ of the Section into fractional lots and legal subdivisions to accommodate farm units and to delineate the boundary of the Snyder Ranch Floodway which will be retained in United States ownership. The original Lot 1 of Sec. 1 is subdivided into Lots 5, 6 and 7; Lot 2 into Lots 8, 9 and 10; Lot 3 into Lots 11 and 12. The original Lot 4 is undistributed. The Right-of-Way lines of the Snyder Ranch Floodway are designated as the boundary between adjacent lots. The Floodway is constructed for the protection of the farmed lands along an old course of the Gila River which in flood stages overflows into this old channel. The present river channel is approximately one mile to the north.

From the township cor. of T7S R15W, T7S R16W, T8S R15W and T8S R16W and cor. of Secs. 1, 6, 31 and 36, which is also angle point 1 of Lot 5 in Sec. 1, T8S R16W. Monument is an iron post 2 in. diam., set 10 in. below road surface at N. edge of road with brass cap mkd.

Survey of Lots 5 to 12, inclusive, Sec. 1, T.8S., R. 16W. G. & S. R. M., Ariz.

- T7S R16W
S36 | S31
S 1 | S 6
 T8S R15W
 1954
- 20.17 S. 89° 50' 40" W., along twsp. line and N. line of Lot 5, near N. edge of gravelled county road.
- CHAINS The E 1/16 cor. of Secs. 1 and 36 and angle points 2 of Lot 5 and 1 of Lot 10, at N. edge of road and over a farm turnout road siphon.
- Cor. 1st monumented with an iron post 1 in. diam., set 6 in. below the N. edge of the county road, with brass cap mkd.
- E 1/16
S36
 S1
 1954
- 40.34 Leave Lot 5 continuing on N. line of Lot 10.
- The 1/4 cor. of Secs. 1 and 36 and angle points 2 of Lot 10 and 1 of Lot 11. Falls at N. edge of road and over road siphon for the M-28.9-4.5 Lateral. An iron post 1 in. diam., set 3 in. below surface with brass cap mkd.
- 1/4 S36
 S1
T7 S R16W
T8 S R16W
 1954
- 60.51 Leave Lot 10 continue on N. line of Lot 11.
- The W 1/16 cor. of Secs. 1 and 36. Also angle point 2 of Lot 11. At N. edge of road. Monument is an iron post, 1 in. diam., set 4 in. below surface with brass cap mkd.
- W 1/16
S 36
 S 1
 1954
- 80.68 Continue measurement, now on N. line of original Lot 4.
- The cor. of Secs. 1 and 2 of T8S R16W and Secs. 35 and 36 of T7S R16W. An iron post 2 in. diam., set 8 in. out of ground off N. edge of road with brass cap mkd.
- T7S R16W
S35 | S36
S 2 | S 1
 T8S
 1953
- 0.91 Thence, S. 0° 47' 13" E., bet. Secs. 1 and 2 and W. line of Lot 4 of Sec. 1, begin new measurement.
- 20.23 Centerline of the M-28.9 Lateral and midway bet. headwalls of county road siphon.
- The N 1/16 cor. of Secs. 1 and 2. An iron post 1 in. diam., set 6 in. out of ground on field border with brass cap mkd.
- N 1/16
 S2 | S1
 1953

Survey of Lots 5 to 12 inclusive, Sec. 1, T.8S., R. 16 W., G. & S. R. M., Ariz.

40.46 Continue measurement along edge of irrigated field, leaving Lot 4.
The $\frac{1}{4}$ cor. of Secs. 1 and 2. An iron post 1 in. diam., set 6 in. flush with field border at cor. of irrigated field, with brass cap mkd.

$\frac{1}{4}$
S2 | S1
1949

Thence, N. $89^{\circ} 54' 58''$ E., on E. and W. centerline of Sec. 1, beginning new measurement.

CHAINS
20.05

Point for the CW $\frac{1}{16}$ cor. of Sec. 1 which falls in irrigated field. Set temporary point only at proportionate distance as permanent monument would interfere with farming operations.

Continue measurement

40.10 Point for the C $\frac{1}{4}$ Cor. of Sec. 1 at intersection with N. and S. centerline of Sec. 1. Falls in irrigated field. Set temporary point.

60.16 Point for the CE $\frac{1}{16}$ cor. of Sec. 1. At proportionate distance set a temporary point only as location is in field.

80.22 The $\frac{1}{4}$ cor. of Sec. 1 in T8S R16W and Sec. 6 in T8S R15W in center of graded county road and monumented with an iron post 1 in. diam., set 10 in. below road surface with brass cap mkd.

S1 | S6
 $\frac{1}{4}$
1949

Thence, N. $0^{\circ} 07' 32''$ W., bet. Secs. 1 and 6 along center of road.

20.28 The N $\frac{1}{16}$ cor. of Secs. 1 and 6 at angle point 5 of Lot 7. An iron post 1 in. diam., set 8 in. below road surface with brass cap mkd.

N $\frac{1}{16}$
S1 | S6
1954

Continue measurement now on E. line of Lot 7.

27.83 Intersection with S. right-of-way line of the Snyder Ranch Floodway and angle points 5 of Lot 6 and 1 of Lot 7, in Sec. 1, T8S, R16W. Monument was set in survey of Section 6, T8S R15W and is an iron post 3 ft. long, 1 in. diam., 8 in. below road surface with brass cap mkd.

T8S
R16W | R15W
S1 | AP 4
L 13
AP 4
L 14
S6
1954

Marking changed to accomodate Lots 6 and 7 in Sec. 1, T8S R16W to read

Survey of Lots 5 to 12 inclusive, Sec. 1, T.8S., R. 16W., G. & S. R. M., Ariz.

T8S	
R16W	R15W
AP 5	AP 4
L 6	L 13
AP 1	AP 4
L 7	L 14
S1	S6

1954

Leave Lot 7 continue on E. line of Lot 6

38.29

To intersect the N. R/W line of the Floodway at angle points 4 of Lot 5 and 1 of Lot 6, in Sec. 1. Set an iron post 1 in. diam., 3 ft. long, 6 in. below road surface with brass cap mkd.

T8S	
R16W	R15W
AP 4	
L 5	L 13
AP 1	S6
L 6	
S1	

1954

Leave Lot 6 continue on E. line of Lot 5

38.44

The intersection with the N. R/W line of the Floodway in Sec. 6, T8S, R15W. The R/W width in Sec. 1 is 10 feet less than in Sec. 6. Monument was set at this point in survey of Sec. 6 and is an iron post 1 in. diam., set 6 in. below road surface with brass cap mkd.

CHAINS

T8S	
R16W	R15W
	AP 3
L 5	L 12
S1	AP 3
	L 13
	S6

1954

Marking for Lot 5 in Sec. 1 was added to brass cap.

Continue measurement.

39.65

Centerline of the M-28.9 Lateral, midway bet. headwalls of county road siphon.

40.56

The township cor. of T7S R15W, T7S R16W, T8S R15W and T8S R16W previously described.

From the $\frac{1}{4}$ cor. of Secs. 1 and 12 near center of county road running E. and W., an iron post 1 in. diam., set 30 in. below surface of road with brass cap mkd.

$\frac{1}{4}$ $\frac{S1}{S12}$
1949

N. 0° 26' 36" W., on N. and S. centerline of Sec. 1

0.91

Centerline of the M-26.6 Lateral.

Continue measurement across cultivated field

40.52

The temporary point set for the C $\frac{1}{4}$ cor. of Sec. 1 at the intersection with the E. and W. centerline of Sec. 1

Survey of Lots 5 to 12 inclusive, Sec. 1, T.8S., R.16W., G. & S. R. M., Ariz.

- 49.00 Continue across fields.
End of cultivated fields.
- 60.77 Point for the CN 1/16 cor. of Sec. 1 and angle points 4 of Lot 9 and 5 of Lot 12. At proportionate distance

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass mkd.

CN
1/16
S1
1954
- 66.20 Continue bet. Lots 9 and 12

Intersection with the N. R/W line of the Floodway at angle points 3 of Lot 9, 3 of Lot 10, 7 of Lot 11 and 1 of Lot 12.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

T8S	R16W
AP 7	AP 3
L 11	L 10
AP 1	AP 3
L 12	L 9
	S1
	1954

Leave Lots 9 and 12 continue bet. Lots 10 and 11
- 80.19 Centerline of the M-28.9 Lateral
- CHAINS
81.02 The $\frac{1}{4}$ cor. of Sec. 1, T8S R16W and Sec. 36, T7S R16W, and angle point 2 of Lot 10 and angle point 1 of Lot 11, in Sec. 1. Monument previously described.

From the N 1/16 cor. of Sec. 1, T8S R16W and Sec. 6, T8S R15W and angle point 5 of Lot 7, monument previously described.

S. $89^{\circ} 52' 49''$ W., on the E. and W. centerline of the NE $\frac{1}{4}$ of Sec. 1 and on the S. line of Lot 7.
- 20.11 To point for the NE 1/16 cor. of Sec. 1 and angle points 4 of Lot 7 and 4 of Lot 8. At intersection with the N. and S. centerline of the NE $\frac{1}{4}$ of Sec. 1

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

NE
1/16
S1
1954

Continue measurement. Leave Lot 7 continue on S. line of Lot 8.
- 30.76 To intersect the S. R/W line of the Floodway at angle point 3 of Lot 8 and angle point 5 of Lot 9.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

Survey of Lots 5 to 12 inclusive, Sec. 1, T.8S., R.16W., G. & S. R. M., Ariz.

T8S	R16W
AP 5	AP 3
L 9	L 8
SI	
1954	

Leave Lot 8 continue on S. line of Lot 9.

40.22

The CN 1/16 cor. of Sec. 1 previously set and described.

Continue on S. line of Lot 12, and the E. and W. centerline of the NW $\frac{1}{4}$ of Sec. 1

48.55

To intersect the N. R/W line of the Floodway at angle points 4 of Lot 12 and 4 of Lot 11.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

T8S	R16W
AP 4	AP 4
L 11	L 12
SI	
1954	

Leave Lot 12 continuing on S. line of Lot 11.

60.33

To point for the NW 1/16 cor. of Sec. 1 and angle point 3 of Lot 11. At intersection with the N. and S. centerline of the NW $\frac{1}{4}$ of Sec. 1

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

NW
1/16
SI
1954

Continue measurement on S. line of Lot 4.

80.44

The N 1/16 cor. of Secs. 1 and 2 previously described.

From the temporary point set for the CE 1/16 cor. of Sec. 1 in field.

CHAINS

N. 0° 17' 03" W., on the N. and S. centerline of the NE $\frac{1}{4}$ of Sec. 1.

20.26

To the NE 1/16 cor. of Sec. 1 previously set and described, at edge of cultivated field.

Continue measurement, now bet. Lots 7 and 8.

27.79

To intersect the S. R/W line of the Snyder Ranch Floodway at a point on a curve in the R/W line, at angle points 3 of Lot 6, 3 of Lot 7, 1 of Lot 8 and 7 of Lot 9.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

T8S	R16W
AP 7	AP 3
L 9	L 6
AP 1	AP 3
L 8	L 7
SI	
1954	


Leave Lots 7 and 8 continue bet. Lots 6 and 9.

Survey of Lots 5 to 12 inclusive, Section 1, T.8S., R.16W., G. & S. R. M., Ariz.

38.25

Intersection with the N. R/W line of the Floodway and angle points 3 of Lot 5, 2 of Lot 6, 1 of Lot 9 and 5 of Lot 10.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.



Leave Lots 6 and 9 continue bet. Lots 5 and 10.

39.61

Centerline of the M-28.9 Lateral.

40.52

The E 1/16 cor. of Sec. 1, T8S R16W and Sec. 36, T7S R16W previously described.

From the temporary point set in cultivated field near west edge of field for the CW 1/16 cor. of Sec. 1

N. 0° 36' 54" W., on N. and S. centerline of the NW 1/4 of Sec. 1

20.24

To the NW 1/16 cor. of Sec. 1 previously set and described.

Continue measurement, now bet. Lots 4 and 11.

39.57

Centerline of the M-28.9 Lateral.

40.48

The W 1/16 cor. of Secs. 1 and 36 of T8S R16W and T7S R16W respectively.

Following is a traverse of the north and south right-of-way lines of the Snyder Ranch Floodway which have been designated by the Bureau of Reclamation as the boundary of adjacent lots.

From the monument set on the range line bet. Sec. 1, T8S R16W and Sec. 6, T8S R15W, at angle point 4 of Lot 5 and angle point 1 of Lot 6 on the northern right-of-way line.

S. 89° 50' 40" W., on the N. R/W line and bet. Lots 5 and 6.

20.16

To monument set at intersection with the N. and S. centerline of the NE 1/4 of Sec. 1.


CHAINS

Leave Lots 5 and 6 continue measurement now bet. Lots 9 and 10.

25.59

To angle point in R/W line. Point is angle point 2 of Lot 9 and 4 of Lot 10.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.



Thence, S. 49° 18' 12" W., still bet. Lots 9 and 10 beginning new measurement.

19.30

To intersection with the N. and S. centerline of Sec. 1 and monument previously set and described.

Survey of Lots 5 to 12, inclusive, Sec. 1, T.8S., R.16W., G. & S. R. M., Ariz.

24.67	<p>Leave Lots 9 and 10 continuing measurement bet. Lots 11 and 12.</p> <p>To P. C. of curve in right-of-way line and angle points 6 of Lot 11 and 2 of Lot 12. Not monumented.</p> <p>Thence, beginning new measurement, on curve in R/W line whose data is</p> <p style="margin-left: 40px;"> Δ 19° 53' 26" Rt. R 360.00 feet T 63.12 feet L 124.98 feet (1.89 chains) </p>																
1.89	<p>To P. T. of curve and angle points 5 of Lot 11 and 3 of Lot 12. Point not monumented.</p> <p>Thence, S. 69° 11' 38" W., continuing bet. Lots 11 and 12.</p> <p>Begin new measurement.</p>																
2.78	<p>To intersect the E. and W. centerline of the NW$\frac{1}{4}$ of Sec. 1 at monument previously set and described as angle points 4 of Lot 11 and 4 of Lot 12.</p> <p style="text-align: center;">-----</p> <p>From the monument set on the range line bet. Sec. 1, T8S R16W and Sec. 6, T8S R15W and angle point 5 of Lot 6 and 1 of Lot 7 on the southern right-of-way line.</p> <p>S. 89° 49' 59" W., on the S. R/W line and bet. Lots 6 and 7.</p>																
19.95	<p>To P. C. of curve in R/W line and angle points 4 of Lot 6 and 2 of Lot 7. Not monumented.</p> <p>Thence beginning new measurement, on curve in R/W line whose data is</p> <p style="margin-left: 40px;"> Δ 1° 55' 11" Lt. R 360.00 feet T 6.03 feet L 12.06 feet (0.18 chains) </p>																
0.18	<p>To Point on Curve at intersection with the N. and S. centerline of the NE$\frac{1}{4}$ of Sec. 1. Iron post previously set and described.</p> <p>Thence continuing on curve in R/W line whose data is</p> <p style="margin-left: 40px;"> Δ 38° 36' 36" Lt. R 360.00 feet T 126.11 feet L 242.59 feet (3.67 chains) </p> <p>Beginning new measurement</p>																
CHAINS 3.67	<p>To P. T. of curve and angle points 6 of Lot 9 and 2 of Lot 8. Point not monumented.</p> <p>Thence, S. 49° 18' 12" W., begin new measurement, bet. Lots 8 and 9.</p>																
9.56	<p>To intersect the E. and W. centerline of the NE$\frac{1}{4}$ of Sec. 1 at monument previously set and described as angle points 1 of Lot 8 and 5 of Lot 9.</p> <hr/> <p>Note: The area of the Lots is as follows:</p> <table style="margin-left: 40px; border: none;"> <tr> <td>Lot 5</td> <td>4.58 acres</td> <td>Lot 9</td> <td>22.34 acres</td> </tr> <tr> <td>Lot 6</td> <td>21.07 acres</td> <td>Lot 10</td> <td>13.82 acres</td> </tr> <tr> <td>Lot 7</td> <td>15.17 acres</td> <td>Lot 11</td> <td>38.90 acres</td> </tr> <tr> <td>Lot 8</td> <td>4.65 acres</td> <td>Lot 12</td> <td>1.86 acres</td> </tr> </table>	Lot 5	4.58 acres	Lot 9	22.34 acres	Lot 6	21.07 acres	Lot 10	13.82 acres	Lot 7	15.17 acres	Lot 11	38.90 acres	Lot 8	4.65 acres	Lot 12	1.86 acres
Lot 5	4.58 acres	Lot 9	22.34 acres														
Lot 6	21.07 acres	Lot 10	13.82 acres														
Lot 7	15.17 acres	Lot 11	38.90 acres														
Lot 8	4.65 acres	Lot 12	1.86 acres														

Survey of Lots 5, 6, 7, 8, 9, and 10 in the NE $\frac{1}{4}$ of Section 3, T. 8S., R. 16W., G. & S. R. M., Ariz.

Survey of Lots 5, 6, 7, 8, 9, and 10, Sec. 3, T.8S., R.16W., G. & S. R. M., Ariz.

The NE $\frac{1}{4}$ of this section is subdivided into fractional lots and legal subdivisions to accomodate farm units and to delineate the boundaries of Snyder Ranch Floodway which will be retained in United States ownership. The original Lot 1 is further subdivided into Lots 5, 6, and 7. Original Lot 2 is subdivided into Lots 8, 9, and 10. Lots 3 and 4 remain as in original designation. The Floodway is constructed along the old course of the Gila River as protection for the farmed lands against infrequent seasons when flood stages of the Gila River sends water down this old channel. The Floodway empties into the present river channel in Lot 10 of this section.

From the cor. of Secs. 2 and 3 of T8S R16W and Secs. 34 and 35 of T7S R16W and angle point 1 of Lot 5 in Sec. 3. An iron post 2 in. diam., set 12 in. out of ground off N. edge of E. and W. county road with brass cap mkd.

T7S R16W	
S34	S35
S 3	S 2
T8S	
1953	

S. 89° 51' 54" W., bet. Secs. 3 and 34, and on N. line of Lot 5

20.17

The E 1/16 cor. of Secs. 34 and 3 at angle points 2 of Lot 5 and 1 of Lot 8. Monument is an iron post 1 in. dia., set 10" out of ground with brass cap mkd.

E 1/16
S34
S3
1950

Leave Lot 5 continue on N. line of Lot 8.

29.11

To point on left bank of Gila River which bears SW, and angle points 2 of Lot 8 and 1 of Lot 10. This monument was set in the survey of Sec. 34, T7S R16W for angle points 2 of Lot 13 and 4 of Lot 12 in Sec. 34. An iron post 1 in. diam., set 8 in. out of ground with brass cap mkd.

T7S R16W	
S34	
AP 4	AP 2
L 12	L 13
S3	
T8S R16W	
1954	

Marking on brass cap changed to accomodate lottings in Sec. 3 to

T7S R16W	
S34	
AP 4	AP 2
L 12	L 13
S3	
T8S R16W	
1954	

Leave Lot 8, continue on N. line of Lot 10 in Sec. 3

37.10

To point on right bank of river. Monument found at this point was set in survey of Sec. 34, T7S R16W, and is an iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.

Survey of Lots 5 to 10 inclusive, Section 3, T. 8S., R. 26W., G. & S.R.M., Ariz.

CHAINS

Markings on this brass
 T7S R16W
 S34
 AP 4 / AP 3
 L 11 / L 12
 S3
 T8S R16W
 1954

CHAINS

Markings on this brass cap are changed to read

T7S R16W
 S34
 AP 4 / AP 3
 L 11 / L 12
 S3 T8S
 L 10
 1954

Continue measurement

40.34

The $\frac{1}{4}$ cor. of Secs. 3 and 34 and angle point 2 of Lot 10. An iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.

$\frac{1}{4}$ S34
 S3
 1949

Thence, S. $0^{\circ} 47' 26''$ E., on N. and S. centerline of Sec. 3 and bet. Lots 10 and 3, beginning new measurement.

11.21

Right bank of Gila River channel bearing SW.

16.67

Left bank of channel.

20.25

Point for the CN 1/16 cor. of Sec. 3 and angle point 3 of Lot 10. At proportionate distance

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

CN
 1/16
 S3
 1954

Leave Lot 10 continuing measurement.

34.09

Left flood bank of river, approximately five feet high.

40.50

The C $\frac{1}{4}$ cor. of Sec. 3 falling at cor. of E-W and N-S fence. An iron post 1 in. diam., set flush with ground with brass cap mkd.

C $\frac{1}{4}$ S3
 1949

Thence, N. $89^{\circ} 49' 13''$ E., on E. and W. centerline of Sec. 3 and along E-W fence line. Begin new measurement.

20.21

Point for the CE 1/16 cor. of Sec. 3 which falls at end of concrete lined lateral M-26.6-4.0. At proportionate distance made temporary mark for corner. Not monumented.


Continue measurement along lateral centerline.

40.42


The $\frac{1}{4}$ cor. of Secs. 2 and 3. Falls over siphon under county roadway on the M-26.6-4.0 Lateral. Road not developed. An iron post, 1 in. diam., set 8 in. below surface with brass cap mkd.

Survey of Lots 5 to 10, inclusive, Sec. 3, T.8S., R.16W., G. & S. R. M., Ariz.

CHAINS
 20.23
 Thence, N. $0^{\circ} 54' 37''$ W., bet. Secs. 2 and 3.




The N 1/16 cor. of Secs. 2 and 3. Cor is also angle point 5 of Lot 7. An iron post 1 in. diam., set 5 in. out of ground with brass cap mkd.



21.76
 Continue measurement now on E. line of Lot 7
 To intersect the S. R/W line of the Snyder Ranch Floodway at a Point on Curve in the R/W line, at angle point 6 of Lot 6 and angle point 1 of Lot 7.


Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.



Leave Lot 7 continue on E. line of Lot 6.

33.20
 To intersect the N. R/W line of the Floodway at a Point On Curve in the R/W line and angle points 5 of Lot 5 and 1 of Lot 6.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.



Leave Lot 6 continue on E. line of Lot 5.

40.40
 The cor. of Secs. 2 and 3, T8S R16W and Secs. 34 and 35, T7S R16W and the monument previously described.

 From the temporary point marked in the M-26.6-4.0 Lateral for the CE 1/16 cor. of Sec. 3

N. $0^{\circ} 51' 02''$ W., on the N. and S. centerline of the NE $\frac{1}{4}$ of Sec. 3

20.24
 Point for the NE 1/16 at intersection with the E. and W. centerline of NE $\frac{1}{4}$ of Secs. 3. Also angle points 4 of Lot 7 and 4 of Lot 10.

Survey of Lots 5 to 10 inclusive, Sec. 3, T.8S., R.16W., G. & S. R. M., Ariz.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

NE
1/16
S3
1954

Continue measurement bet. Lots 7 and 10

24.20

To intersection with the S. R/W line of the Floodway at angle points 4 of Lot 6, 3 of Lot 7, 4 of Lot 9 and 5 of Lot 10.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

CHAINS

T8S R16W	
AP 4	AP 4
L 9	L 6
AP 5	AP 3
L 10	L 7
S3	
1954	

Leave Lots 7 and 10 continue bet. Lots 6 and 9.

33.90

To intersect the N. R/W line of the Floodway. Also angle points 3 of Lot 5, 3 of Lot 6, 4 of Lot 8 and 1 of Lot 9.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

T8S R16W	
AP 4	AP 3
L 8	L 5
AP 1	AP 3
L 9	L 6
S3	
1954	

Leave Lots 6 and 9 continue bet. Lots 5 and 8.

40.41

The E 1/16 cor. of Sec. 3, T8S R16W and Sec. 34, T7S R16W previously described.

From the N 1/16 cor. of Secs. 2 and 3 which is also angle point 5 of Lot 7.

S. 89° 51' 12" W., on the E. and W. centerline of the NE 1/4 of Sec. 3 and the S. line of Lot 7.

20.19

To the NE 1/16 cor. of Sec. 3 previously set and described.

Leave Lot 7 continue on S. line of Lot 10.

40.38

The CN 1/16 cor. of Sec. 3 previously described.

Following are traverses of the north and south right-of-way lines of the Snyder Ranch Floodway which have been designated by the Bureau of Reclamation as being the boundary between Lots.

From the monument set at the intersection of the line bet. Secs. 2 and 3 and the N. R/W line of the Floodway at angle point 5 of Lot 5 and 1 of Lot 6, a Point On Curve.

Along curve in R/W line whose data is

Survey of Lots 5 to 10 inclusive, Sec. 3, T.8S., R.16W., G. & S. R. M., Ariz.

CHAINS

Δ 17° 05' 33" Lt.
 R 1020.00 ft.
 T 153.28 ft.
 L 304.29 ft. (4.61 chains)

Tangent P.O.C. to P.I. bearing is N. 73° 02' 33" W.

4.61 To P. T. of curve and angle point 4 of Lot 5 and 2 of Lot 6. Point not monumented.

Begin new measurement.


Thence, S. 89° 51' 54" W., bet. Lots 5 and 6.

15.64 To intersection with the N. and S. centerline of the NE $\frac{1}{4}$ of Sec. 3 and monument previously set and described.

Leave Lots 5 and 6 continuing measurement.

28.36 Point on left bank of river and angle point 3 of Lot 8, 2 of Lot 9 and 7 of Lot 10. River bears SW.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.



End of N. right-of-way line. Floodway empties into river.

From the intersection of the line bet. Secs. 2 and 3 and the south R/W line of the Floodway at angle points 6 of Lot 6 and 1 of Lot 7, a Point On Curve.

Along curve in R/W line whose data is

Δ 54° 41' 06" Lt.
 R 380.00 ft.
 T 196.49 ft.
 L 362.69 ft. (5.50 chains)

Tangent P.O.C. to P.I. bearing is N. 35° 10' 48" W.

5.50 To P. T. of curve and angle points 5 of Lot 6 and 2 of Lot 7. Point not monumented.


Thence, S. 89° 51' 54" W., bet. Lots 6 and 7, beginning new measurement.

15.52 To intersect the N. and S. centerline of the NE $\frac{1}{4}$ of Sec. 3 at monument previously set and described.

Leave Lots 6 and 7 continuing measurement bet. Lots 9 and 10.

23.89 To angle point 3 of Lot 9 and 6 of Lot 10, at end of S. R/W line where Floodway empties into river channel.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.



Survey of Lots 5 to 10 inclusive, Sec. 3, T.8S., R.16W., G. & S. R. M., Arizona

CHAINS	Thence, N. 24° 52' 54" W., beginning new measurement across end of old river channel and Floodway, still bet. Lots 9 and 10.												
10.68	To intersect the N. R/W line of the Floodway on bank of river at point previously monumented and described.												
	Thence, N. 29° 25' 51" E., beginning new measurement, bet. Lots 8 and 10 along left bank of river.												
7.49	To the line bet. Sec. 3, T8S R16W and Sec. 34, T7S R16W and monument previously described as angle point 2 of Lot 8 and 1 of Lot 10 in Sec. 3.												
<p>Note: The area of the Lots</p> <table border="0"> <tr> <td>Lot 5</td> <td>13.24 acres</td> <td>Lot 8</td> <td>7.05 acres</td> </tr> <tr> <td>Lot 6</td> <td>19.81 acres</td> <td>Lot 9</td> <td>10.22 acres</td> </tr> <tr> <td>Lot 7</td> <td>7.66 acres</td> <td>Lot 10</td> <td>23.44 acres</td> </tr> </table>		Lot 5	13.24 acres	Lot 8	7.05 acres	Lot 6	19.81 acres	Lot 9	10.22 acres	Lot 7	7.66 acres	Lot 10	23.44 acres
Lot 5	13.24 acres	Lot 8	7.05 acres										
Lot 6	19.81 acres	Lot 9	10.22 acres										
Lot 7	7.66 acres	Lot 10	23.44 acres										

Survey of Lots 3, 4, 5, and 6 in Section 8, T8S., R.16W., G. & S. R. M., Arizona

By a limited retracement and subdivision survey executed by Clark Gumm, Cadastral Engineer, Bureau of Land Management, in April 1952 the NE 1/4 was subdivided into Tract 38 and Lots 1 and 2.

In this survey the SE 1/4 of Sec. 8 is subdivided into legal subdivisions and Lots 3, 4, 5, and 6. Lots 1 and 2 and Tract 38 remain undisturbed.

From the 1/4 cor. of Secs. 5 and 8, an iron post 1 in. diam., set 8 in. out of ground with brass cap mkd.

1/4 S5 / S8 1950

S. 0° 10' 12" E., on the N. and S. centerline of Sec. 8.

20.00 Enter cultivated land which bears E. and W.

40.04 Point for the C 1/4 Sec. cor. of Sec. 8, not monumented at this time.

60.00 Leave cultivated land which bears E. and W.

60.155 Point for the CS 1/16 cor. of Sec. 8. At proportionate distance Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

CS 1/16 S8 1954

Continue measurement

80.27 The 1/4 sec. cor. of Secs. 8 and 17, which is monumented with an iron post, 1 in. diam., set with brass cap mkd. 12 in. below surface of farm road

1/4 S8 / S17 1950

(Road was built and monument lowered subsequent to survey by Clark Gumm as noted in his notes)

Thence, S. 89° 13' 45" E., bet. Secs. 8 and 17 along farm road, begin new measurement.

Survey of Lots 3, 4, 5, and 6, Sec. 8, T.8S., R.16W., G. & S, R. M., Arizona

17.98 To right bank of river which bears S.

20.18 The E 1/16 cor. of Secs. 8 and 17 in river bed. Also angle point 3 of Lot 5. An iron post 1 in. diam., 18 in. below ground with brass cap mkd.

E 1/16
S8

S17
1950

Continue measurement on S. bdy of Lot 5.

21.47 Point on left bank of river for angle point 4 of Lot 5 and 4 of Lot 6, in Sec. 8. Road veers off of section line.

Set iron post 3 ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd.

T8S R16W
AP 4 / AP 4
L 5 / L 6
S8 / S8

S17
1954

Continue measurement on S. bdy. of Lot 6.

40.36 CHAINS The Sec. cor. of Secs. 8, 9, 16 and 17. An iron post 2 in. diam., set 6 in. out of ground with brass cap mkd.

T8S R16W
S8 | S9

S17 | S16
1941

Corner is also angle point 5 of Lot 6.
Thence, N. 0° 14' 42" W., bet. Secs. 8 and 9 on E. bdy. of Lot 6

20.23 The S 1/16 cor. of Sec. 8 and angle point 1 of Lot 6 and 3 of Lot 3. An iron post 1 in. diam., set 4 in. below surface with brass cap mkd.

S 1/16
S8 | S9

1950

Leave Lot 6 continue measurement on E. bdy. of Lot 3.

33.98 To angle point 1 of Lot 3 and angle point 5 of Lot 4.

Set an iron post 3 ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd.

T8S R16W
AP 5
L 4 |
AP 1 | S9
L 3 |
S8
1954

Leave Lot 3 continue on E. bdy. of Lot 4.

40.46 The 1/4 sec. cor. of Secs. 8 and 9 and angle point 1 of Lot 4. An iron post 1 in. diam., set 8 in. out of ground with brass cap mkd.

Survey of Lots 3, 4, 5, and 6, Section 8, T.8S., R.16W., G. & S. R. M., Arizona


	<p style="text-align: center;"> $\frac{1}{4}$ S8 S9 1949 </p> <p>Thence, N. $89^{\circ} 32' 30''$ W., on E. and W. centerline of Sec. 8 and the N. Bdy. of Lot 4.</p>
12.40	Left bank of Gila River, bearing S.
19.30	Right bank of river.
20.145	The CE 1/16 cor. of Sec. 8 and angle point 2 of Lot 4. Monument is an iron post 1 in. diam., 8 in. out of ground with brass cap mkd.
	<p>CE 1/16 S8 1952</p>
27.20	Leave Lot 4. Enter cultivated land which bears N. and S.
40.29	Point for the C $\frac{1}{4}$ sec. cor. of Sec. 8, falling on bank of irrigation farm ditch. At intersection with the N. and S. centerline of Sec. 8. Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.
	<p>C $\frac{1}{4}$ S8 1954</p>
	Continue measurement.
80.58	The $\frac{1}{4}$ sec. cor. of Secs. 7 and 8 which is monumented with an iron post 1 in. diam., set 8 in. out of ground, with brass cap mkd.
CHAINS	<p>$\frac{1}{4}$ S7 S8 1949</p> <p>-----</p>
20.17	From the E 1/16 cor. of Secs. 8 and 17 and angle point 3 of Lot 5, monument previously described N. $0^{\circ} 12' 24''$ W., along N. and S. centerline of the SE $\frac{1}{4}$ of Sec. 8 and the W. bdy. of Lot 5 in river bed. To point for the SE 1/16 cor. of Sec. 8 and angle points 2 of Lot 5 and 3 of Lot 4 on right bank of river. At intersection with the E. and W. centerline of the SE $\frac{1}{4}$ of Sec. 8 Set iron post 3 ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd.
	<p>SE 1/16 S8 1954</p>
40.34	Leave Lot 5 continue on W. bdy of Lot 4 and along indistinct bank of river. The CE 1/16 cor. of Sec. 8 previously described.
	<p>-----</p>
	From the S 1/16 cor. of Secs. 8 and 9 and angle points 3 of Lot 3 and 1 of Lot 6.

4436

Survey of Lots 3, 4, 5 and 6, Section 8, T.8S., R. 16W., G. & S. R. M., Arizona

N. 89° 23' 07" W., on the E. and W. centerline of the SE 1/4 of Sec. 8 and bet. Lots 3 and 6.

13.50 Edge of indistinct river channel on right bank. Also angle point 2 of Lot 3, AP 4 of Lot 4, AP 1 of Lot 5 and AP 2 of Lot 6.
Set iron post 3 ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd.



Leave Lots 3 and 6 continue bet. Lots 4 and 5 across channel.

20.16 The SE 1/16 cor. of Sec. 8 on left bank of river, previously described.

Leave Lots 4 and 5 continuing across cultivated field

40.32 The CS 1/16 cor. of Sec. 8, previously described.

Following is a traverse of the boundary between Lots 3 and 4, and 5 and 6 as designated by the Bureau of Reclamation as being the limit of the irrigable land adjacent to the left river bank.

From the monument set at angle point 1 of Lot 3 and 5 of Lot 4 on the line bet. Secs. 8 and 9.

S. 44° 39' 30" W., bet. Lots 3 and 4.


19.12 To intersection with the E. and W. centerline of the SE 1/4 of Sec. 8 and monument previously set and described.

Leave Lots 3 and 4.

CHAINS Thence, S. 12° 27' 30" E., bet. Lots 5 and 6 along left bank of river. Beginning new measurement.

4.57 To angle point 5 of Lot 5 and 3 of Lot 6.

Set iron post 3 ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd.



Thence, S. 21° 53' 30" W., beginning new measurement along bank of river.

16.87 The monument previously set and described for angle point 4 of Lot 5 and angle point 4 of Lot 6 on the line bet. Secs. 8 and 17.

The right bank of the river is not traversed.

Note: The areas are

Lot 3	9.28 acres	Lot 5	10.20 acres
Lot 4	31.43 acres	Lot 6	30.54 acres

Survey of Lots 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14 and 15 in the N $\frac{1}{2}$ of Section 17, T.8S., R.16W., G. & S. R. M., Arizona

A Supplemental Survey of the NW $\frac{1}{4}$ of Section 17 was executed by Albin H. Wadin, Bureau of Reclamation Engineer, in May, 1952, creating Lots 1 and 2. The Plat was approved July 17, 1953. This survey is made to subdivide the entire N $\frac{1}{2}$ of Section 17 into legal subdivisions and additional fractional lots which will accommodate farm units, and is a retracement of the survey of 1952 in order to accomplish the additional subdividing. The right and left banks of the Gila River have been designated by the Bureau of Reclamation as the boundary between adjacent lots as herein surveyed.

CHAINS

From the cor. of Secs. 8, 9, 16 and 17, which is also angle point 1 of Lot 3. An iron post 2 in. diam., set 8 in. out of ground with brass cap mkd.

T8S R16W	
S 8	S 9
S17	S16
1941	

N. 89° 13' 45" W., bet. Secs. 8 and 17 and on N. bdy. of Lot 3.

18.89

To point on left bank of river which bears S. and monument set in survey of Section 8 T8S R16W. Monument is an iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.

T8S R16W	
AP 4	AP 4
L 5	L 6
S8	S8
S17	
1954	

Markings on this cap are changed to accommodate AP 2 of Lot 3 and AP 1 of Lot 4 in Section 17 and now reads

T8S R16W	
AP 4	AP 4
L 5	L 6
S8	S8
S17	S17
AP 1	AP 2
L 4	L 3
1954	

CHAINS

Leave Lot 3 continuing on N. bdy. of Lot 4, crossing river bed.

20.18

The E 1/16 cor. of Secs. 8 and 17 which is also angle points 2 of Lot 4 and 1 of Lot 6 in Sec. 17. An iron post 1 in. diam., set 18 in. below ground with brass cap mkd.

E 1/16	
S8	
S17	
1950	

Continue measurement on N. bdy. of Lot 6.

22.38


Point on right bank of river and angle points 2 of Lot 6 and 1 of Lot 7.

Set iron post 3 ft. long, 1 in. diam., 6 in. below surface with brass cap mkd.

T8S R16W	
S8	
AP 1	AP 2
L 7	L 6
S17	


Survey of Lots 3 to 15 inclusive, Sec. 17, T.8S., R.16W., G. & S. R. M., Arizona

40.36 Leave Lot 6 continue on N. bdy. of Lot 7.
The $\frac{1}{4}$ cor. of Secs. 8 and 17 and angle point 2 of Lot 7. An iron post 1 in. diam., set 12 in. below surface of road with brass cap mkd.




Continue measurement bet. Sec. 8 and 17

60.54 The W 1/16 cor. of Secs. 8 and 17, is an iron post 1 in. diam., set 8 in. out of ground with brass cap mkd.




80.72 The Sec. cor. of Secs. 7, 8, 17 and 18. An iron post 2 in. diam., set 8 in. out of ground with brass cap mkd.




Thence, S. 0° 08' 42" E., bet. Secs. 17 and 18, beginning new measurement.

12.95 Point on right bank of river which bears SE-NW, and monument for angle points 3 of Lot 1 and 1 of Lot 2, an iron post 1 in. diam., set 8 in. out of ground with brass cap mkd.



Continue measurement.

20.00 The N 1/16 cor. of Secs. 17 and 18 near center of river bed. Monument is an iron post 1 in. diam., set 10 in. out of ground with brass cap mkd.




Cor. is also angle point 4 of Lot 9.

Continue measurement now on W. bdy. of Lot 9.

25.46 The left bank of the river and angle point 5 of Lot 9 and 2 of Lot 10.

Set an iron post 3 ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd.



Survey of Lots 3 to 15 inclusive, Sec. 17, T.8S., R. 16W., G. & S. R. M., Arizona

	Continue on W. bdy. of Lot 10.
40.00	The $\frac{1}{4}$ cor. of Secs. 17 and 18 and angle point 3 of Lot 10. Monument is an iron post 1 in. diam., set 8 in. out of ground with brass cap mkd.
	<div style="text-align: center;"> $\frac{1}{4}$ S18 S17 1941 </div>
	Thence, S. $89^{\circ} 13' 08''$ E., on E. and W. centerline of Sec. 17 and the S. bdy. of Lot 10. Begin new measurement.
14.38	Angle point 1 of Lot 10 and angle point 6 of Lot 9 near left bank of river which bears NW.
	Set iron post 3ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd.
	<div style="text-align: center;"> T8S. R16W AP 1 \ AP 6 L 10 \ L 9 S17 1954 </div>
	Leave Lot 10 continue on S. line of Lot 9.
20.21	The CW 1/16 cor. of Sec. 17, falling near toe of river bank. Point is also angle points 7 of Lot 9 and 4 of Lot 12. An iron post 1 in. diam., set 8 in. out of ground with brass cap mkd.
	<div style="text-align: center;"> CW 1/16 S17 1952 </div>
	Continue in river bed which runs E. and W. here and on S. bdy of Lot 12.
40.42	The C $\frac{1}{4}$ sec. cor. of Sec. 17 and angle points 5 of Lot 12, 4 of Lot 14 and 5 of Lot 15 falling on indistinct left bank of river. An iron post 1 in. diam., set 8 in. out of ground with brass cap mkd.
	<div style="text-align: center;"> C $\frac{1}{4}$ S17 1952 </div>
CHAINS	Continue measurement now on S. bdy of Lot 15.
60.635	Point for the CE 1/16 cor. of Sec. 17 and angle point 6 of Lot 15. At proportionate distance.
	Set iron post 3 ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd.
	<div style="text-align: center;"> CE 1/16 S17 1954 </div>
	Continue measurement
80.85	The $\frac{1}{4}$ cor. of Secs. 16 and 17, an iron post 1 in. diam., set 14 in. out of ground with brass cap mkd.
	<div style="text-align: center;"> $\frac{1}{4}$ S17 S16 1941 </div>


BOOK

Survey of Lots 3 to 15 inclusive, Sec. 17, T.8S., R.16W., G. & S. R. M., Arizona

Thence, N. 0° 14' 06" W., bet. Secs. 16 and 17, beginning new measurement

20.01 To the point for the N 1/16 cor. of Secs. 16 and 17 and angle point 5 of Lot 3. At proportionate distance

Set iron post 3ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd.



39.29 Centerline of the M-26.6 Lateral, midway bet. headwalls of road siphon.


40.02 The cor. of Secs. 8, 9, 16 and 17 previously described.

From the N 1/ 16 cor. of Secs. 16 and 17 previously described.

N. 89° 13' 27" W., on E. and W. centerline of the NE 1/4 of Sec. 17 and the S. bdy. of Lot 3.

20.20 Point for the NE 1/16 cor. of Sec. 17 and angle points 4 of Lot 3, 3 of Lot 5 and 1 of Lot 15. At intersection with the N. and S. centerline of the NE 1/4 of Sec. 17.


Set iron post 3 ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd.



Leave Lot 3 continue bet. Lots 5 and 15.

24.75 Left bank of Gila River which bears SSW and angle point 2 of Lot 5, AP 5 of Lot 6, AP 1 of Lot 14 and AP 2 of Lot 15.


Set iron post 3ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd.



CHAINS Continue bet. Lots 6 and 14 crossing river bed.

32.82 To point on right bank of river at angle points 4 of Lot 6, 4 of Lot 7, 1 of Lot 13 and 2 of Lot 14.

Set iron post 3 ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd.



Continue bet. Lots 7 and 13.

Survey of Lots 3 to 15 inclusive, Sec. 17, T.8S., R.16W., G. & S. R. M., Ariz.

40.40 The CN 1/16 cor. of Sec. 17 and angle points 3 of Lot 7, 1 of Lot 11 and 2 of Lot 13. An iron post 1 in. diam., set 8 in. out of ground with brass cap mkd.

CN
1/16
S17
1952

Leave Lots 7 and 13 continuing on N. bdy. of Lot 11 and the E. and W. centerline of the NW $\frac{1}{4}$ of Sec. 17

60.59 The NW 1/16 cor. of Sec. 17 which is angle point 2 of Lot 11 and angle point 1 of Lot 8. Monumented by an iron post 1 in. diam., set 10 in. out of ground with brass cap mkd.

NW
1/16
S17
1952

Continue on N. bdy. of Lot 8

74.77 Monument on right bank of river set in survey of Lots 1 and 2 for angle point 4 of Lot 1 and angle point 3 of Lot 2. Same monument is now used for angle points 2 of Lot 8 and 3 of Lot 9. An iron post 1 in. diam., set 8 in. out of ground with brass cap mkd.

S17
T8S R16W
AP 3 AP 4
L 2 L 1
1952

Markings changed to

T8S R16W
AP 3 AP 4
L 2 L 1
AP 3 AP 2
L 9 L 8
S17
1954

Continue on N. bdy. of Lot 9

80.78 The N 1/16 cor. of Secs. 17 and 18 previously described.

From the CE 1/16 cor. of Sec. 17 previously described.

N. 0° 16' 40" W., on the N. and S. centerline of the NE $\frac{1}{4}$ of Sec. 17 and on the E. bdy. of Lot 15.

20.00 The NE 1/16 cor. of Sec. 17 and angle points 1 of Lot 15 and 3 of Lot 5. Previously set and described.


CHAINS Leave Lot 15 continue bet. Lots 3 and 5.

33.63 Point on left bank of river which bears SSW at angle point 3 of Lot 3, 3 of Lot 4, 1 of Lot 5 and 6 of Lot 6.

Set iron post 3 ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd.

17-18-19-20-21-22-23

Survey of Lots 3 to 15 inclusive, Sec. 8, T.8S., R.16W., G. & S. R. M., Arizona



Leave Lots 3 and 5 continue bet. Lots 4 and 6 in river bed.

40.00

The E 1/16 cor. of Secs. 8 and 17 previously described.


From the C 1/4 cor. of Sec. 17 previously described.

N. 0° 13' 45" W., on the N. and S. centerline of Sec. 17 and bet. Lots 12 and 14, crossing river channel.

14.85

Point on right bank of river which bears SW and angle points 3 of Lot 13, 3 of Lot 14, 5 of Lot 11 and 1 of Lot 12.

Set iron post 3 ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd.



Leave Lots 12 and 14 continue bet. Lots 11 and 13,

20.00

The CN 1/16 cor. of Sec. 17 previously described.

Continue now on W. bdy. of Lot 7.

40.00

The 1/4 cor. of Secs. 8 and 17 previously described.


From the CW 1/16 cor. of Sec. 17 previously described.

N. 0° 11' 14" W., on the N. and S. centerline of the NW 1/4 of Sec. 17 and bet. Lots 9 and 12.

8.78

To point on indistinct right bank of river and angle points 4 of Lot 8, 1 of Lot 9, 3 of Lot 11 and 3 of Lot 12.

Set iron post 3 ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd.



Leave Lots 9 and 12 continue bet. Lots 8 and 11.

CHAINS
20.00


The NW 1/16 cor. of Sec. 17 which is also angle points 1 of Lot 8 and 2 of Lot 11. Monument previously described.

Survey of Lots 3 to 15 inclusive, Sec. 17, T.8S., R.16W., G. & S. R. M., Ariz.

40.00	<p>Leave Lots 8 and 11 continuing measurement on E. bdy. of Lot 1.</p> <p>The W 1/16 cor. of Secs. 8 and 17 previously described.</p> <p>-----</p>
	<p>The following lines are traverses of the right and left banks of the Gila River as determined by the Bureau of Reclamation being the limit of the irrigable lands adjacent to the river and are the boundaries between adjacent lots.</p> <p>From the monument set on the right bank of the river at angle point 2 of Lot 6 and 1 of Lot 7 at the intersection of the right bank with the line between Secs. 8 and 17</p> <p>-----</p> <p>S. 7° 54' W., along right bank and bet. Lots 6 and 7.</p>
9.09	<p>To angle point 3 of Lot 6 and 5 of Lot 7.</p> <p>Set iron post 3 ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd.</p>
	<p style="text-align: center;">T8S R16W</p> <p style="text-align: center;">AP 5 AP 3 L 7 L 6</p> <p style="text-align: center;">S17 1954</p> <p>Thence, S. 39° 52' 30" W., beginning new measurement.</p>
14.15	<p>To intersect the E. and W. centerline of the NE¼ of Sec. 17 at monument previously set and described.</p> <p>Thence, S. 56° 15' W., beginning new measurement, bet Lots 13 and 14.</p>
9.09	<p>To intersection with the N. and S. centerline of Sec. 17 at monument previously set and described.</p> <p>Thence, S. 60° 24' W., begin new measurement now bet. Lots 11 and 12</p>
13.41	<p>To angle point 4 of Lot 11 and 2 of Lot 12.</p> <p>Set iron post 3 ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd.</p>
	<p style="text-align: center;">T8S R16W</p> <p style="text-align: center;">AP 4 L 11</p> <p style="text-align: center;">AP 2 L 12 S17 1954</p> <p>Thence, N. 89° 21' 30" W., beginning new measurement</p>
8.56	<p>Intersection with the N. and S. centerline of the NW¼ of Sec. 17 at monument previously set and described.</p> <p>Thence, N. 66° 06' W., leaving Lots 11 and 12 and beginning measurement. bet Lots 8 and 9.</p>
7.12	<p>To angle point 3 of Lot 8 and 2 of Lot 9.</p> <p>Set iron post 3 ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd.</p>

Survey of Lots 3 to 15 inclusive, Sec. 17, T.8S., R.16W., G. & S. R. M., Arizona

CHAINS



Thence, N. 42° 06' W., beginning new measurement.

11.50

To monument set in survey of Lots 1 and 2 at angle points 4 of Lot 1 and 3 of Lot 2.

Monument is at the intersection of the right bank of the river and the E. and W. centerline of the NW $\frac{1}{4}$ of Sec. 17, and has been previously described.

From the monument previously set for angle points 2 of Lot 3 and 1 of Lot 4 at the intersection of the left bank of the river and the line bet. Secs. 8 and 17

S. 11° 11' W., along left bank of river and bet. Lots 3 and 4.

6.48

To intersect the N. and S. centerline of the NE $\frac{1}{4}$ of Sec. 17 at monument previously set and described.

Thence, S. 18° 16' W., bet. Lots 5 and 6 and beginning new measurement.

14.29


To the E. and W. centerline of the NE $\frac{1}{4}$ of Sec. 17 and monument previously set and described.

Thence, S. 19° 33' W., bet. Lots 14 and 15. New measurement.

11.74

To angle points 6 of Lot 14 and 3 of Lot 15.

Set iron post 3 ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd.




Thence, S. 44° 12' W., still bet. Lots 14 and 15.

7.27

To angle point 5 of Lot 14 and angle point 4 of Lot 15.

Set iron post 3 ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd.



CHAINS

Thence, S. 61° 52' 30" W., still bet. Lots 14 and 15 and beginning new measurement.

7.45

To the C $\frac{1}{4}$ cor. of Sec. 17 and end of traverse of this portion of the left bank of the river. Monument previously described.

From the monument set at the intersection of the left bank of the river and the E. and W. centerline of Sec. 17 at angle point 6 of Lot 9 and 1 of Lot 10, previously described.

ECCOR

Survey of Lots 3 to 15 inclusive, Sec. 17, T.8S., R.16W., G. & S. R. M., Arizona

20.61

N. 44° 21' W., along the left bank of the river and bet. Lots 9 and 10.

To intersection with the line bet. Secs. 17 and 18 and monument previously set and described as angle point 5 of Lot 9 and 2 of Lot 10.

Note: The areas of the Lots

Lot 3	39.97 acres	Lot 10	10.45 acres
Lot 4	0.41 acres	Lot 11	19.84 acres
Lot 5	3.10 acres	Lot 12	20.56 acres
Lot 6	8.31 acres	Lot 13	1.95 acres
Lot 7	28.96 acres	Lot 14	19.24 acres
Lot 8	9.63 acres	Lot 15	19.22 acres
Lot 9	20.32 acres		

(21)

ECOR 442

CERTIFICATE OF CADASTRAL ENGINEER

I, Albin H. Wadin Bureau of Reclamation, HEREBY CERTIFY upon honor that, under authority of Departmental Instructions of October 24, 1906.

I have surveyed the N 1/2 of Section 1, the NE 1/4 of Section 3, the SE 1/4 of Section 8 and the N 1/2 of Section 17, Township 8 South, Range 16 West

of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with the Manual of Instructions for the Survey of Public Lands of the United States, and in the specific manner described in the foregoing field notes.

Yuma, Arizona
November 30, 1954

Albin H. Wadin
Albin H. Wadin
General Engineer, U.S.B.R.

CERTIFICATE OF APPROVAL

Bureau of Reclamation

Washington, D. C. MAR 17 1955, 19

The foregoing field notes of the survey of the N 1/2 of Section 1, the NE 1/4 of Section 3, the SE 1/4 of Section 8 and the N 1/2 of Section 17, Township 8 South, Range 16 West, Gila and Salt River Meridian, Arizona

executed by Albin H. Wadin

having been critically examined and found correct, are hereby approved.

E. Nielsen
Assistant Commissioner

CERTIFICATE OF TRANSCRIPT

Bureau of Land Management
Washington, D. C. _____ 19 _____

I CERTIFY that the foregoing transcript of the field notes of the above described surveys in _____ is a true copy of the original field notes.