

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

THE DEPENDENT RESURVEY

PORTIONS OF

SOUTH BOUNDARY,

SUBDIVISIONAL LINES

AND

SUBDIVISION

OF

SECTIONS 28, 29 and 33

TOWNSHIP 30 NORTH

RANGE 3 EAST

Of the Gila and Salt River Meridian,

In the State of Arizona

EXECUTED BY

Leonard W. Murphy, Supervisory Cadastral Surveyor

Under special instructions dated February 4, 19 66, which provided for the surveys

included under Group Number 442, approved February 7, 1966,

and assignment instructions dated August 30, 19 66.

Survey commenced September 16, 19 66


Survey completed September 30, 19 66

1A

BOOK 4783

INDEX DIAGRAM

Township 30 North, Range 3 East

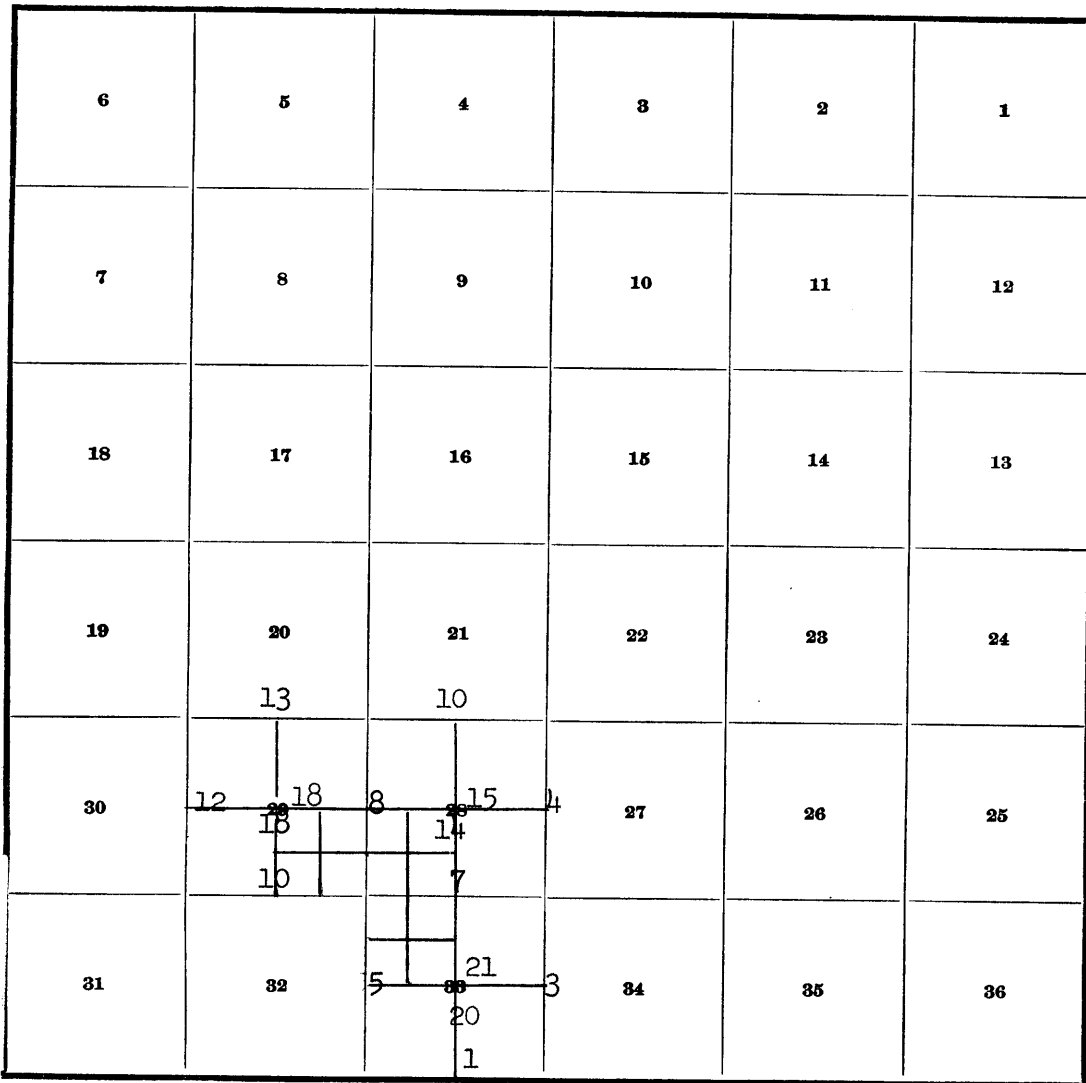

SW $\frac{1}{4}$ Sec. 28.....Page 15
 SE $\frac{1}{4}$ Sec. 29.....Page 19
 NW $\frac{1}{4}$ Sec. 33.....Page 22

Township 30 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS

All boundaries of sections 28, 29 and 33, of Township 30 North, Range 3 East, were surveyed in 1900 by J. B. Pope, Deputy Surveyor. H.E.S. 284 in Townships 29 and 30 North, Range 3 East, was surveyed in 1914 by L. C. Way, Forest Ranger, and the corners remonumented by the Forest Service in 1965.

The following field notes are those of a dependent resurvey of portions of the south boundary and subdivisional lines and a survey of partial subdivision of certain sections in order to delineate the public land.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and the Special Instructions dated February 4, 1966.

Only the true line bearings and horizontal distances for the surveyed lines are given in these notes. Unless described, each corner was monumented with a standard iron post, 30 inches long, $2\frac{1}{2}$ inches in diameter, flanged at the base and with a brass cap riveted to the top.

The geographic position of the southeast corner of section 33 as scaled from the only source available, U. S. Forest Service KAIBAB NATIONAL FOREST QUAD 94 is as follows: Latitude $35^{\circ} 56' 00''$ North and Longitude $112^{\circ} 03' 54''$ West.

The magnetic declination was read at a number of stations and the average of these readings was found to be $14^{\circ} 40'$ East.

Dependent Resurvey, Portion of South Boundary
Township 30 North, Range 3 East
Gila and Salt River Meridian, Arizona

Re-establishment of Survey executed in 1900
by J. B. Pope

Beginning the resurvey from the cor. of secs. 3, 4, 33 and 34, which is monumented with a limestone, 18x16x12 ins., firmly set and mkd. with 3 notches on the E. and W. edges.

At the corner point

Set the iron post, 14 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, cap mkd.

T30N R3E
S33 S34
S4 S3
T29N
1966

from which

A pine, 48 ins. diam., bears N. 82° E., 49 lks. dist., mkd. T30N R3E S34 BT (old B.T.).

A pine, 40 ins. diam., bears S. 47° E., 160 lks. dist., mkd. T29N R3E S3 BT (old B.T.).

Dependent Resurvey, Portion of South Boundary
 Township 30 North, Range 3 East
 Gila and Salt River Meridian, Arizona

CHAINS					
	<p>A pine, 40 ins. diam., bears S. 16$\frac{1}{2}$° W., 76 lks. dist., mkd. T29N R3E S4 BT (old B.T.).</p> <p>A pine, 30 ins. diam., bears N. 47° W., 92 lks. dist., mkd. T30N R3E S33 BT (old B.T.).</p> <p>Bury the limestone alongside the iron post.</p> <p>S. 89° 48' W., bet. secs. 4 and 33.</p> <p>Over level land, through scattering timber.</p>				
1.90	<p>Cor. number 15 of H.E.S. 284, monumented with an iron pipe, 2 ins. diam., set and mkd. by the U.S. Forest Service in 1965.</p>				
13.61	<p>Cor. number 13 of H.E.S. 284, monumented with an iron pipe, 2 ins. diam., set and mkd. by the U. S. Forest Service in 1965.</p>				
18.00	<p>Forest Service Route 7302, bears N. 35° W. and S. 35° E.</p>				
33.10	<p>Small draw, drains NW.</p>				
35.00	<p>Low spur, bears NW. and SE.</p>				
39.94	<p>The $\frac{1}{4}$ cor. of secs. 4 and 33, monumented with a limestone, 18x10x4 ins., firmly set and mkd. $\frac{1}{4}$ on N. face.</p> <p>At the corner point</p> <p>Set the iron post 9 ins. in the ground, to bedrock, and in a mound of stone, 3 ft. base to top, cap mkd.</p> <div style="text-align: center;"> <p>T30N R3E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">1</td> <td style="padding: 0 5px;">S33</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">4</td> <td style="padding: 0 5px;">S4</td> </tr> </table> <p>T29N 1966</p> </div> <p>from which</p> <p>A pine, 16 ins. diam., bears N. 19° E., 15 lks. dist., mkd. $\frac{1}{4}$ S33 BT (old B.T.).</p> <p>A fallen pine, bears S. 30° E., 60 lks. dist., old scribings partially legible.</p> <p>A pine, 22 ins. diam., bears S. 10° E., 92 lks. dist., mkd. $\frac{1}{4}$ S4 BT (new B.T.).</p> <p>Bury the limestone alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89° 30' W., beginning new measurement.</p> <p>Over level land, through timber.</p>	1	S33	4	S4
1	S33				
4	S4				
40.01	<p>The cor. of secs. 4, 5, 32 and 33, monumented with a limestone, 20x16x5 ins., firmly set and mkd. with 4 notches on E. and 2 notches on W. edges.</p> <p>At the corner point</p> <p>Set the iron post, 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, cap mkd.</p> <div style="text-align: center;"> <p>T30N R3E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S32</td> <td style="padding: 0 5px;">S33</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S5</td> <td style="padding: 0 5px;">S4</td> </tr> </table> <p>T29N 1966</p> </div>	S32	S33	S5	S4
S32	S33				
S5	S4				

Dependent Resurvey, Portion of South Boundary
Township 30 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS	from which
	<p>A pine, 30 ins. diam., bears N. 37° E., 62 lks. dist., mkd. T30N R3E S33 BT (old B.T.).</p> <p>A pine, 30 ins. diam., bears S. 12½° E., 72 lks. dist., mkd. T29N R3E S4 BT (old B.T.).</p> <p>A pine, 24 ins. diam., bears S. 28½° W., 59 lks. dist., mkd. T29N R3E S5 BT (old B.T.).</p> <p>A pine, 29 ins. diam., bears N. 36° W., 48 lks. dist., mkd. T30N R3E S32 BT (old B.T.).</p> <p>Bury the limestone alongside the iron post.</p>
<p>Dependent Resurvey, Portion Subdivisional Lines Township 30 North, Range 3 East Gila and Salt River Meridian, Arizona</p>	
<p>Re-establishment of Survey executed in 1900 by J. B. Pope</p>	
	<p>From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the township.</p> <p>N. 0° 05' E., bet. secs. 33 and 34.</p>
0.34	Cor. number 1 of H.E.S. 284 monumented with an iron pipe, 2 ins. diam., set and mkd. by U.S. Forest Service in 1965.
5.17	Cor. number 7 of H.E.S. 284, monumented with an iron pipe, 2 ins. diam., set and mkd. by U.S. Forest Service in 1965.
34.50	Small draw, drains SW.
39.92	<p>The ¼ cor. of secs. 33 and 34, monumented with a limestone, 19x14x3 ins., firmly set and mkd. ¼ on W. face.</p> <p>At the corner point</p> <p>Set the iron post 18 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, cap mkd.</p>
	<p>T30N R3E ¼ S33 S34 1966</p>
	<p>from which</p> <p>A pine, 24 ins. diam., bears N. 40° E., 33 lks. dist., mkd. ¼ S34 BT (old B.T.).</p> <p>A pine, 20 ins. diam., bears N. 51½° W., 63 lks. dist., mkd. ¼ S33 BT (old B.T.).</p> <p>Bury the limestone alongside the iron post.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.</p>
	<p>N. 0° 11' E., beginning new measurement.</p>
22.00	Descend rocky N. slope of hill.
28.00	Dry wash, 120 lks. wide, drains SW.
30.00	Ascend rocky S. slope.

Dependent Resurvey, Portion Subdivisional Lines
 Township 30 North, Range 3 East
 Gila and Salt River Meridian, Arizona

CHAINS		
33.00	Low spur; ascend gradually.	
40.11	<p>The cor. of secs. 27, 28, 33 and 34, monumented with a limestone, 16x10x8 ins., firmly set and mkd. with 3 notches on E. and 1 notch on S. faces.</p> <p>At the corner point</p> <p>Set the iron post 16 ins. in the ground, to bedrock, and in a mound of stone, 3 ft. base to top, cap mkd.</p> <div style="text-align: center;"> <p>T30N R3E S28 S27 S33 S34 1966</p> </div> <p>from which</p> <p>A pine, 10 ins. diam., bears N. 49½° E., 24 lks. dist., mkd. T30N R3E S27 BT (old B.T.).</p> <p>A pine, 10 ins. diam., bears S. 71½° E., 17 lks. dist., mkd. T30N R3E S34 BT (old B.T.).</p> <p>A fallen pine, 20 ins. diam., bears S. 44½° W., 62 lks. dist., mkd. T30N R3E S33 BT (old B.T.).</p> <p>A pine, 10 ins. diam., bears N. 10½° W., 21 lks. dist., mkd. T30N R3E S28 BT (old B.T.).</p> <p>Bury the limestone alongside the iron post.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p>	
	N. 0° 01' E., bet. secs. 27 and 28.	
	Over gently rolling land.	
7.75	Dry wash, 30 lks. wide, drains SW.; ascend gentle S. slope.	
16.20	Low ridge, bears E. and W.; descend gentle N. slope.	
40.07	<p>The ¼ cor. of secs. 27 and 28, monumented with a limestone, 18x10x6 ins., firmly set and mkd. ¼ on W. face.</p> <p>At the corner point</p> <p>Set the iron post 24 ins. in the ground, cap mkd.</p> <div style="text-align: center;"> <p>T30N R3E ¼ S28 S27 1966</p> </div> <p>from which</p> <p>A pine, 30 ins. diam., bears N. 80° E., 41 lks. dist., mkd. ¼ S27 BT (old B.T.).</p> <p>A pine, 20 ins. diam., bears N. 71° W., 29 lks. dist., mkd. ¼ S28 BT (old B.T.).</p>	

Dependent Resurvey, Portion Subdivisional Lines
 Township 30 North, Range 3 East
 Gila and Salt River Meridian, Arizona

CHAINS									
	<p>Bury the limestone alongside the iron post.</p> <hr/> <p>N. 0° 01' E., beginning new measurement.</p> <p>Descend N. slope through timber.</p> <p>13.60 Unimproved dirt road, bears N. 73° E. and S. 73° W.</p> <p>17.70 Low spur; descend gentle N. slope.</p> <p>36.75 Unimproved dirt road, bears N. 40° E. and S. 40° W.</p> <p>40.07 The cor. of secs. 21, 22, 27 and 28, monumented with a limestone, 16x10x7 ins., firmly set and mkd. with 2 grooves on S. and 3 grooves on E. faces.</p> <p>At the corner point</p> <p>Set the iron post 25 ins. in the ground, cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td>T30N</td><td>R3E</td></tr> <tr><td>S21</td><td>S22</td></tr> <tr><td>S28</td><td>S27</td></tr> <tr><td colspan="2">1966</td></tr> </table> </div> <p>from which</p> <p>A pine, 28 ins. diam., bears N. 31° E., 123 lks. dist., mkd. T30N R3E S22 BT (old B.T.).</p> <p>A pine, 18 ins. diam., bears S. 86° E., 140 lks. dist., mkd. T30N R3E S27 BT (old B.T.).</p> <p>A pine, 32 ins. diam., bears S. 37° W., 69 lks. dist., mkd. T30N R3E S28 BT (old B.T.).</p> <p>A pine, 28 ins. diam., bears N. 14½° W., 292 lks. dist., mkd. T30N R3E S21 BT (old B.T.).</p> <p>Bury the limestone alongside the iron post.</p>	T30N	R3E	S21	S22	S28	S27	1966	
T30N	R3E								
S21	S22								
S28	S27								
1966									
<p>40.12</p>	<p>From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the township.</p> <p>N. 0° 13' E., bet. secs. 32 and 33.</p> <p>Over a series of low ridges bearing generally E. and W.</p> <p>The ¼ cor. of secs. 32 and 33, monumented with a limestone, 12x10x8 ins.; loosely set and mkd. ¼ on W. face.</p> <p>At the corner point</p> <p>Set the iron post 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td>T30N</td><td>R3E</td></tr> <tr><td>¼</td><td>¼</td></tr> <tr><td>S32</td><td>S33</td></tr> <tr><td colspan="2">1966</td></tr> </table> </div> <p>from which</p> <p>A pine, 18 ins. diam., bears N. 27½° E., 126 lks. dist., mkd. ¼ S33 BT (new B.T.).</p>	T30N	R3E	¼	¼	S32	S33	1966	
T30N	R3E								
¼	¼								
S32	S33								
1966									

Dependent Resurvey, Portion Subdivisional Lines
 Township 30 North, Range 3 East
 Gila and Salt River Meridian, Arizona

CHAINS		
	<p>A pine, 18 ins. diam., bears S. $23\frac{1}{2}^{\circ}$ W., 92 lks. dist., old scribings partially legible and re-marked $\frac{1}{4}$ S32 BT.</p> <p>Find no evidence of bearing tree at record bearing and distance in NE. quadrant.</p> <p>Bury the limestone alongside the iron post.</p> <hr/> <p>N. $0^{\circ} 13'$ E., beginning new measurement.</p>	
20.06	<p>Point for the N. 1/16 cor. of secs. 32 and 33, at proportionate distance.</p> <p>Set the iron post 18 ins. in the ground to bedrock, and in a mound of stone, 2 ft. base to top, cap mkd.</p> <p style="text-align: center;">T30N R3E N 1/16 S32 S33 1966</p> <p>from which</p> <p>A pine, 11 ins. diam., bears S. 65° E., 55 lks. dist., mkd. N 1/16 S33 BT.</p> <p>A pine, 24 ins. diam., bears S. 50° W., 112 lks. dist., mkd. N 1/16 S32 BT.</p>	
28.00	<p>Dry wash, 30 lks. wide, drains SW.; ascend gentle SE. slope.</p>	
40.12	<p>The cor. of secs. 28, 29, 32 and 33, monumented with a limestone, 20x8x6 ins., firmly set and mkd. with 1 notch on S. and 4 notches on E. edges.</p> <p>At the corner point</p> <p>Set the iron post 8 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, cap mkd.</p> <p style="text-align: center;">T30N R3E S29 S28 S32 S33 1966</p> <p>from which</p> <p>A pine, 28 ins. diam.; bears N. $46\frac{1}{2}^{\circ}$ E., 102 lks. dist., mkd. T30N R3E S28 BT (old B.T.).</p> <p>A pine, 10 ins. diam., bears S. $48\frac{1}{2}^{\circ}$ E., 200 lks. dist., mkd. T30N R3E S33 BT (old B.T.).</p> <p>A pine, 12 ins. diam., bears S. $71\frac{1}{4}^{\circ}$ W., 224 lks. dist., mkd. T30N R3E S32 BT (New B.T.).</p> <p>A fallen pine, 19 ins. diam., bears S. 80° W., 141 lks. dist., mkd. T30N R3E S32 BT.</p> <p>A pine, 10 ins. diam., bears N. 4° W., 87 lks. dist., mkd. T30N R3E S29 BT (old B.T.).</p> <p>Bury the limestone alongside the iron post.</p>	

Dependent Resurvey, Portion Subdivisional Lines
Township 30 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS	
	From the cor. of secs. 27, 28, 33 and 34,
	N. 89° 42' W., bet. secs. 28 and 33.
2.00	Wire fence, bears NW. and SE.
15.00	Dry wash, 40 lks. wide, drains SW.
39.79	The $\frac{1}{4}$ cor. of secs. 28 and 33, monumented with a limestone, 14x8x6 ins., firmly set and mkd. $\frac{1}{4}$ on N. face.
	At the corner point
	Set the iron post 24 ins. in the ground, cap mkd.
	$\begin{array}{r} \text{T30N R3E} \\ \frac{1}{4} \frac{\text{S28}}{\text{S33}} \\ 1966 \end{array}$
	from which
	A pine, 30 ins. diam., bears S. 76 $\frac{1}{4}$ ° W., 69 lks. dist., mkd. $\frac{1}{4}$ S33 BT (old B.T.).
	A pine, 30 ins. diam., bears N. 15 $\frac{1}{4}$ ° W., 63 lks. dist., mkd. $\frac{1}{4}$ S28 BT (old B.T.).
	Bury the limestone alongside the iron post.
	N. 89° 41' W., beginning new measurement.
5.01	Point for the E-E-W. 1/256 cor. of secs. 28 and 33, at proportionate dist.
	Set the iron post 24 ins. in the ground, cap mkd.
	$\begin{array}{r} \text{T30N R3E} \\ \text{E-E-W } 1/256 \frac{\text{S28}}{\text{S33}} \\ 1966 \end{array}$
10.01	Point for the E-W. 1/64 cor. of secs. 28 and 33, at proportionate dist.
	Set the iron post 24 ins. in the ground, cap mkd.
	$\begin{array}{r} \text{T30N R3E} \\ \text{E-W } 1/64 \frac{\text{S28}}{\text{S33}} \\ 1966 \end{array}$
20.03	Point for the W. 1/16 cor. of secs. 28 and 33, at proportionate dist.
	Set the iron post 24 ins. in the ground, cap mkd.
	$\begin{array}{r} \text{T30N R3E} \\ \text{W } 1/16 \frac{\text{S28}}{\text{S33}} \\ 1966 \end{array}$
30.04	Point for the W-W. 1/64 cor. of secs. 28 and 33, at proportionate dist.
	Set the iron post 24 ins. in the ground, cap mkd.

Dependent Resurvey, Portion Subdivisional Lines
 Township 30 North, Range 3 East
 Gila and Salt River Meridian, Arizona

CHAINS		
	<p style="text-align: center;">T30N R3E W-W 1/64 $\frac{S28}{S33}$ 1966</p>	
32.05	<p>Forest Service Route 7302 bears N. 35° W. and S. 35° E.</p>	
35.04	<p>Point for the W-W-W. 1/256 cor. of secs. 28 and 33, at proportionate dist.</p>	
	<p>Set the iron post 25 ins. in the ground, cap mkd.</p>	
	<p style="text-align: center;">T30N R3E W-W-W 1/256 $\frac{S28}{S33}$ 1966</p> <p>Ascend gentle NE. slope to corner.</p>	
40.05	<p>The cor. of secs. 28, 29, 32 and 33.</p>	
	<p>N. 0° 14' E., bet. secs. 28 and 29.</p> <p>Over gently rolling land, through scattering timber.</p>	
5.01	<p>Point for the S-S-S. 1/256 cor. of secs. 28 and 29, at proportionate dist.</p>	
	<p>Set the iron post 4 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, cap mkd.</p>	
	<p style="text-align: center;">T30N R3E S-S-S 1/256 S29 S28 1966</p>	
6.50	<p>Descend abrupt N. slope to road.</p>	
8.60	<p>Forest Service Route 7302, bears NW. and SE.; over open meadow.</p>	
10.02	<p>Point for the S-S. 1/64 cor. of secs. 28 and 29, at proportionate dist.</p>	
	<p>Set the iron post 24 ins. in the ground, cap mkd.</p>	
	<p style="text-align: center;">T30N R3E S-S 1/64 S29 S28 1966</p>	
20.05	<p>Point for the S. 1/16 cor. of secs. 28 and 29, at proportionate dist.</p>	
	<p>Set the iron post 24 ins. in the ground, cap mkd.</p>	
	<p style="text-align: center;">T30N R3E S 1/16 S29 S28 1966</p>	
21.35	<p>Wire fence, bears E. and W.; ascend gentle S. slope.</p>	
30.07	<p>Point for the N-S. 1/64 cor. of secs. 28 and 29, at proportionate dist.</p>	

Dependent Resurvey, Portion Subdivisional Lines
Township 30 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS		
	<p>Set the iron post 24 ins. in the ground, cap mkd.</p> <p style="text-align: center;">T30N R3E N-S 1/64 S29 S28 1966</p>	
40.10	<p>Corner falls in wire fence bearing E. and W.</p> <p>The $\frac{1}{4}$ cor. of secs. 28 and 29, monumented with a limestone, 14x12x3 ins., firmly set and mkd. $\frac{1}{4}$ on W. face.</p> <p>At the corner point</p> <p>Set the iron post 26 ins. in the ground, cap mkd.</p> <p style="text-align: center;">T30N R3E $\frac{1}{4}$ S29 S28 1966</p> <p>from which</p> <p>A pine, 32 ins. diam., bears N. $43\frac{1}{2}^{\circ}$ E., 198 lks. dist., mkd. $\frac{1}{4}$ S28 BT (old B.T.).</p> <p>A pine, 25 ins. diam., bears N. $80\frac{1}{2}^{\circ}$ W., 168 lks. dist., mkd. $\frac{1}{4}$ S29 BT (old B.T.).</p> <p>Bury the limestone alongside the iron post.</p> <hr/> <p>N. $0^{\circ} 14'$ E., beginning new measurement.</p> <p>Ascend gentle S. slope through timber.</p>	
4.86	Wire fence, bears NE. and SW.	
12.20	End ascent; over level land.	
22.00	Descend gentle N. slope.	
25.45	Small draw, drains W.; ascend gentle S. slope.	
29.70	Low spur; descend N. slope.	
39.00	Unimproved dirt road, bears NE. and SW.	
40.01	<p>The cor. of secs. 20, 21, 28 and 29, monumented with a limestone, 15x10x6 ins., loosely set and mkd. with 2 notches on S. and 4 notches on E. edges.</p> <p>At the corner point</p> <p>Set the iron post 26 ins. in the ground, cap mkd.</p> <p style="text-align: center;">T30N R3E S20 S21 S29 S28 1966</p> <p>from which</p> <p>A pine, 28 ins. diam., bears N. 57° E., 227 lks. dist., mkd. T30N R3E S21 BT (old B.T.).</p> <p>A pine, 24 ins. diam., bears S. $2\frac{1}{2}^{\circ}$ E., 99 lks. dist., mkd. T30N R3E S28 BT (old B.T.).</p>	

Dependent Resurvey, Portion Subdivisional Lines
 Township 30 North, Range 3 East
 Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A pine, 24 ins. diam., bears S. 54° W., 89 lks. dist., mkd. T30N R3E S29 BT (old B.T.).</p> <p>A pine, 8 ins. diam., bears N. 39° W., 36 lks. dist., mkd. T30N R3E S20 BT (old B.T.).</p> <p>Bury the limestone alongside the iron post.</p>
	<p>From the cor. of secs. 21, 22, 27 and 28.</p> <p>N. 89° 37' W., bet. secs. 21 and 28.</p> <p>4.00 Ascend rocky E. slope through timber.</p> <p>7.00 Low spur; descend gradually.</p> <p>12.35 Small draw, drains SW.</p> <p>16.20 Wire fence, bears NE. and SW.</p> <p>18.20 Draw, 3 chs. wide, drains S.; ascend SE. slope.</p> <p>25.00 Over level land.</p> <p>39.81 The $\frac{1}{4}$ cor. of secs. 21 and 28, monumented with a limestone, 18x10x6 ins., firmly set and mkd. $\frac{1}{4}$ on N. face.</p> <p>At the corner point</p> <p>Set the iron post 24 ins. in the ground, cap mkd.</p> <div style="text-align: center;"> <p>T30N R3E</p> <p>$\frac{1}{4}$ S21</p> <hr style="width: 50px; margin: 0 auto;"/> <p>$\frac{1}{4}$ S28</p> <p>1966</p> </div> <p>from which</p> <p>A cedar, 20 ins. diam., bears N. 45° E., 80 lks. dist., mkd. $\frac{1}{4}$ S21 BT (old B.T.).</p> <p>A pine, 18 ins. diam., bears S. 32$\frac{1}{4}$° E., 34 lks. dist., mkd. $\frac{1}{4}$ S28 BT (new B.T.).</p> <p>Find no evidence of old bearing tree in SE. quadrant</p> <p>Bury the limestone alongside the iron post.</p>
	<p>N. 89° 52' W., beginning new measurement.</p> <p>Descend gentle W. slope.</p> <p>4.25 Dry wash, 25 lks. wide, drains S.; ascend E. slope.</p> <p>8.00 Low spur, bears N. and S.; over gently rolling land.</p> <p>22.00 Low spur, bears N. and S.; descend gentle W. slope.</p> <p>39.73 The cor. of secs. 20, 21, 28 and 29.</p>
15.00	<p>From the cor. of secs. 28, 29, 32 and 33.</p> <p>N. 89° 52' W., bet. secs. 29 and 32.</p> <p>Point for the W-E-E. 1/256 cor. of secs. 29 and 32, at proportionate dist.</p>

Dependent Resurvey, Portion Subdivisional Lines
Township 30 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set the iron post 14 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, cap mkd.</p>
	<p style="text-align: center;">T30N R3E W-E-E 1/256 $\frac{S29}{S32}$ 1966</p>
19.00	Draw, drains NE.
20.00	<p>Point for the E. 1/16 cor. of secs. 29 and 32, at proportionate dist.</p>
	<p>Set the iron post 22 ins. in the ground to bedrock, and in a mound of stone, 2 ft. base to top, cap mkd.</p>
	<p style="text-align: center;">T30N R3E E 1/16 $\frac{S29}{S32}$ 1966</p>
21.30	Low spur, bears N. and S.; descend gentle W. slope.
40.00	<p>The $\frac{1}{4}$ cor. of secs. 29 and 32, monumented with a limestone, 14x10x6 ins., firmly set and mkd. $\frac{1}{4}$ on N. face.</p>
	At the corner point
	<p>Set the iron post 20 ins. in the ground, to bedrock and in a mound of stone, 2$\frac{1}{2}$ ft. base to top, cap mkd.</p>
	<p style="text-align: center;">T30N R3E $\frac{1}{4}$ $\frac{S29}{S32}$ 1966</p>
	from which
	<p>A pine, 32 ins. diam., bears S. 12° W., 166 lks. dist., mkd. $\frac{1}{4}$ S32 BT (old B.T.).</p>
	<p>A pine, 8 ins. diam., bears N. 29° W., 44 lks. dist., mkd. $\frac{1}{4}$ S29 BT (new B.T.).</p>
	<p>A fallen pine, bears N. 61$\frac{1}{2}$° W., 45 lks. dist., mkd. $\frac{1}{4}$ S29 BT (record bearing N. 61$\frac{1}{2}$° E.).</p>
	Bury the limestone alongside the iron post.
	<hr/>
	N. 89° 59' W., beginning new measurement.
6.00	Draw, drains NE.; ascend gradually.
25.00	Unimproved dirt road, bears N. 20° W. and S: 20° E.
40.23	<p>The cor. of secs. 29, 30, 31 and 32, monumented with a limestone, 16x11x8 ins., firmly set and mkd. with 1 groove on S. and 5 grooves on E. faces.</p>
	At the corner point
	<p>Set the iron post 24 ins. in the ground, cap mkd.</p>

Dependent Resurvey, Portion Subdivisional Lines
 Township 30 North, Range 3 East
 Gila and Salt River Meridian, Arizona

CHAINS	<p style="text-align: center;">T30N R3E S30 S29 S31 S32 1966</p> <p>from which</p> <p>A pine, 20 ins. diam., bears N. 42½° E., 94 lks. dist., mkd. T30N R3E S29 BT (old B.T.).</p> <p>A pine, 20 ins. diam., bears S. 27½° E., 89 lks. dist., mkd. T30N R3E S32 BT (old B.T.).</p> <p>A pine, 22 ins. diam., bears S. 32° W., 113 lks. dist., mkd. T30N R3E S31 BT (old B.T.).</p> <p>A pine, 24 ins. diam., bears N. 32° W., 116 lks. dist., mkd. T30N R3E S30 BT (old B.T.).</p> <p>Bury the limestone alongside the iron post.</p>
	<p>N. 0° 12' E., bet. secs. 29 and 30.</p>
15.55	<p>Over gently rolling land, through scattering timber.</p> <p>Forest Service Route 7302, bears generally E. and W.</p>
22.30	<p>Unimproved dirt road, bears NW. and SE.</p>
40.17	<p>The ¼ cor. of secs. 29 and 30, monumented with a limestone, 16x8x6 ins., firmly set and mkd. with ¼ on W. face.</p> <p>At the corner point</p> <p>Set the iron post 24 ins. in the ground, cap mkd.</p> <p style="text-align: center;">T30N R3E ¼ S30 S29 1966</p> <p>from which</p> <p>A pine, 24 ins. diam., bears S. 53° E., 142 lks. dist., mkd. ¼ S29 BT (record dist. 111 lks.).</p> <p>A pine, 20 ins. diam., bears N. 49½° W., 111 lks. dist., mkd. ¼ S30 BT (record dist. 142 lks.).</p> <p>Bury the limestone alongside the iron post.</p>
	<p>N. 0° 12' E., beginning new measurement.</p>
5.36	<p>Forest Service Route 7321 bears N. 70° W. and S. 70° E.</p>
18.00	<p>Descend gentle N. slope.</p>
40.16	<p>The cor. of secs. 19, 20, 29 and 30, monumented with a limestone, 16x10x5 ins., firmly set and mkd. with 5 grooves on E. and 2 grooves on S. faces.</p> <p>At the corner point</p> <p>Set the iron post 24 ins. in the ground, cap mkd.</p>

Dependent Resurvey, Portion Subdivisional Lines
 Township 30 North, Range 3 East
 Gila and Salt River Meridian, Arizona

CHAINS

T30N R3E
 $\frac{S19}{S30} | \frac{S20}{S29}$
 1966

from which

A pine, 14 ins. diam., bears N. $44\frac{1}{2}^\circ$ E., 71 lks. dist., mkd. T30N R3E S20 BT (old B.T.).

A pine, 24 ins. diam., bears S. 53° E., 17 lks. dist., mkd. T30N R3E S29 BT (old B.T.).

A pine, 14 ins. diam., bears S. $61\frac{1}{2}^\circ$ W., 76 lks. dist., mkd. T30N R3E S30 BT (old B.T.).

A pine, 14 ins. diam., bears N. $67\frac{1}{2}^\circ$ W., 67 lks. dist., mkd. T30N R3E S19 BT (old B.T.).

Raise a mound of stone, 4 ft. base, 2 ft. high, W. of cor.

Bury the limestone alongside the iron post.

Corner falls in small draw which drains SE.

From the cor. of secs. 20, 21, 28 and 29.

N. $89^\circ 41'$ W., bet. secs. 20 and 29.

1.00 Ascend rocky SE. slope.

4.00 Low spur, bears NE. and SW.; descend gradually.

32.50 Dry wash, 30 lks. wide, drains SW.

40.14 The $\frac{1}{4}$ cor. of secs. 20 and 29, monumented with a limestone, 16x10x8 ins., firmly set and mkd. $\frac{1}{11}$ on N. face.

At the corner point

Set the iron post 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, cap mkd.

T30N R3E
 $\frac{1}{4} \frac{S20}{S29}$
 1966

from which

A pine, 22 ins. diam., bears N. $12\frac{1}{2}^\circ$ E., 85 lks. dist., mkd. $\frac{1}{4}$ S20 BT (old B.T.).

A pine, 16 ins. diam., bears S. 5° E., 103 lks. dist., mkd. $\frac{1}{4}$ S29 BT (old B.T.).

Bury the limestone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

N. $89^\circ 51'$ W., beginning new measurement.

Descend gradually through scattering timber.

Dependent Resurvey, Portion, Subdivisional Lines
 Township 30 North, Range 3 East
 Gila and Salt River Meridian, Arizona

<p>CHAINS</p> <p>24.60</p> <p>27.00</p> <p>33.00</p> <p>40.10</p>	<p>Coconino Wash, 2 chs. wide, drains N.</p> <p>Ascend rocky E. slope.</p> <p>End ascent; hill bears generally N. and S.; descend gradually to cor.</p> <p>The cor. of secs. 19, 20, 29 and 30.</p>
<p>Partial Subdivision of Certain Sections Township 30 North, Range 3 East Gila and Salt River Meridian, Arizona</p>	
<p>Subdivision of Section 28</p> <hr/> <p>From the $\frac{1}{4}$ cor. of secs. 28 and 33.</p> <p>N. $0^{\circ} 01'$ E., along the meridional center line of sec. 28.</p> <p>Over gently rolling land.</p>	
<p>6.00</p> <p>16.00</p> <p>20.05</p>	<p>Descend gentle NW. slope.</p> <p>Draw, drains SW.; ascend SE. slope.</p> <p>Point for the C-S. $\frac{1}{16}$ cor. of sec. 28.</p> <p>Set the iron post 25 ins. in the ground, cap mkd.</p>
<p>C S $\frac{1}{16}$ S28 C 1966</p>	
<p>from which</p> <p>A pine, 30 ins. diam., bears N. $1\frac{1}{2}^{\circ}$ E., 39 lks. dist., mkd. C S $\frac{1}{16}$ S28 BT.</p> <p>A pine, 32 ins. diam., bears S. $31\frac{1}{2}^{\circ}$ W., 45 lks. dist., mkd. C S $\frac{1}{16}$ S28 BT.</p> <p>Corner falls on gentle SE. slope.</p>	
<p>29.17</p> <p>40.10</p>	<p>Wire fence bears E. and W.; descend N. slope.</p> <p>Point for the C. $\frac{1}{4}$ cor. of sec. 28.</p> <p>Set the iron post 14 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, cap mkd.</p>
<p>C $\frac{1}{4}$ S28 1966</p>	
<p>from which</p> <p>A pine, 24 ins. diam., bears S. 84° E., 20 lks. dist., mkd. C $\frac{1}{4}$ S28 BT.</p> <p>A pine, 18 ins. diam., bears S. 67° W., 31 lks. dist., mkd. C $\frac{1}{4}$ S28 BT.</p>	
<p>45.00</p>	<p>Dry wash, 20 lks. wide, 2 ft. deep, drains W.</p>

Partial Subdivision of Certain Sections
 Township 30 North, Range 3 East
 Gila and Salt River Meridian, Arizona

CHAINS	
45.85	Unimproved dirt road, bears N. 80° E. and S. 80° W.
60.42	Wire fence, bears NW. and SE.
80.20	The $\frac{1}{4}$ cor. of secs. 21 and 28.
	From the $\frac{1}{4}$ cor. of secs. 27 and 28.
	N. 89° 41' W., along the latitudinal center line of sec. 28.
20.00	Descend gentle W. slope.
39.78	The C. $\frac{1}{4}$ cor. of sec. 28.
59.73	Point for the C-W. 1/16 cor. of sec. 28.
	Set the iron post 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, cap mkd.
	$\begin{array}{c} \text{W } 1/16 \\ \text{C} \text{-----} \text{C} \\ \text{S28} \\ \text{1966} \end{array}$
	from which
	A pine, 8 ins. diam., bears S. 34° W., 89 lks. dist. mkd. C W 1/16 S28 BT.
	A pine, 15 ins. diam., bears N. 70° W., 22 lks. dist., mkd. C W 1/16 S28 BT.
67.70	Descend gentle SW. slope into wash area.
73.00	Dry wash, 2 chs. wide, drains SW.
79.68	The $\frac{1}{4}$ cor. of secs. 28 and 29.
Subdivision of the SW $\frac{1}{4}$ of Section 28	
	From the W. 1/16 cor. of secs. 28 and 33.
	N. 0° 07' E., along the W. 1/16 line of sec. 28.
3.80	Wire fence, bears NW. and SE.
5.02	Point for the C-S-S-SW. 1/256 cor. of sec. 28.
	Set the iron post 18 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, cap mkd.
	$\begin{array}{c} \text{S28} \\ \text{C-S-S-SW} \\ \text{1/256} \\ \text{1966} \end{array}$
10.03	Point for the C-S-SW. 1/64 cor. of sec. 28.
	Set the iron post 24 ins. in the ground, cap mkd.
	$\begin{array}{c} \text{S28} \\ \text{C-S-SW} \\ \text{1/64} \\ \text{1966} \end{array}$

Partial Subdivision of Certain Sections
 Township 30 North, Range 3 East
 Gila and Salt River Meridian, Arizona

CHAINS	<p>from which</p> <p>A pine, 18 ins. diam., bears S. 18° W., 41 lks. dist., mkd. C S SW 1/64 S28 BT.</p> <p>A pine, 18 ins. diam., bears N. 32° W., 86 lks. dist., mkd. C S SW 1/64 S28 BT.</p> <p>12.90 Descend gentle N. slope.</p> <p>20.05 Point for the SW. 1/16 cor. of sec. 28.</p> <p style="padding-left: 40px;">Set the iron post 24 ins. in the ground, cap mkd.</p> <p style="text-align: center;">S28 SW 1/16 1966</p> <p>from which</p> <p>A pine, 36 ins. diam., bears S. 2½° E., 84 lks. dist. mkd. SW 1/16 S28 BT.</p> <p>A pine, 14 ins. diam., bears N. 68½° W., 33 lks. dist., mkd. SW 1/16 S28 BT.</p> <p>25.00 Ascend gentle S. slope.</p> <p>30.11 Wire fence, bears E. and W.</p> <p>40.10 The C-W. 1/16 cor. of sec. 28.</p> <hr style="width: 20%; margin: 10px auto;"/> <p style="padding-left: 40px;">From the C-S. 1/16 cor. of sec. 28.</p> <p style="padding-left: 40px;">N. 89° 41' W., along the S. 1/16 line of sec. 28.</p> <p>5.00 Low ridge, bears N. and S.; descend gentle W. slope.</p> <p>19.99 The SW. 1/16 cor. of sec. 28.</p> <p>29.98 Point for the C-W-SW. 1/64 cor. of sec. 28.</p> <p style="padding-left: 40px;">Set the iron post 24 ins. in the ground, cap mkd.</p> <p style="text-align: center;">S28 C-W-SW 1/64 1966</p> <p>34.00 Ascend gentle E. slope.</p> <p>34.98 Point for the C-W-W-SW. 1/256 cor. of sec. 28.</p> <p style="padding-left: 40px;">Set the iron post 8 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, cap mkd.</p> <p style="text-align: center;">S28 C-W-W-SW 1/256 1966</p> <p>37.98 Wire fence, bears NW. and SE., enter meadow land.</p> <p>39.97 The S. 1/16 cor. of secs. 28 and 29.</p>
	Subdivision of the SW¼ of SW¼ of Section 28
	From the W-W. 1/64 cor. of secs. 28 and 33.

Partial Subdivision of Certain Sections
Township 30 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS	
5.02	<p>N. 0° 10' E., along the W-W. 1/64 line of sec. 28.</p> <p>Point for the C-S-SW-SW. 1/256 cor. of sec. 28.</p> <p>Set the iron post 24 ins. in the ground, cap mkd.</p> <p style="text-align: center;">S28 C-S-SW-SW 1/256 1966</p>
10.03	<p>Point for the SW-SW. 1/64 cor. of sec. 28.</p> <p>Set the iron post 24 ins. in the ground, cap mkd.</p> <p style="text-align: center;">S28 SW-SW 1/64 1966</p>
10.17	<p>Wire fence, bears NW. and SE.; ascend gentle S. slope.</p>
20.05	<p>The C-W-SW. 1/64 cor. of sec. 28.</p>
10.00	<p>From the C-S-SW. 1/64 cor. of sec. 28.</p> <p>N. 89° 41' W., along the S-S. 1/64 line of sec. 28.</p> <p>The SW-SW. 1/64 cor.</p>
15.00	<p>Point for the C-W-SW-SW. 1/256 cor. of sec. 28.</p> <p>Set the iron post 24 ins. in the ground, cap mkd.</p> <p style="text-align: center;">S28 C-W-SW-SW 1/256 1966</p>
20.00	<p>The S-S. 1/64 cor. of secs. 28 and 29.</p>
3.31	<p>From the W-W-W. 1/256 cor. of secs. 28 and 33.</p> <p>N. 0° 12' E., on the W-W-W. 1/256 line of sec. 28.</p> <p>Forest Service Route 7302, bears N. 35° W. and S. 35° E.</p>
5.02	<p>Point for the SW-SW-SW. 1/256 cor. of sec. 28.</p> <p>Set the iron post 24 ins. in the ground, cap mkd.</p> <p style="text-align: center;">S28 SW-SW-SW 1/256 1966</p>
5.00	<p>N. 89° 41' W., on the S-S-S. 1/256 line of sec. 28.</p> <p>The S-S-S. 1/256 cor. of secs. 28 and 29.</p>
10.01	<p>From the C-S-S-SW. 1/256 cor. of sec. 28.</p> <p>N. 89° 41' W., on the S-S-S. 1/256 line of sec. 28.</p> <p>The C-S-SW-SW. 1/256 cor. of sec. 28.</p>
10.02	<p>From the C-W-SW-SW 1/256 cor. of sec. 28.</p> <p>N. 0° 12' E., on the W-W-W. 1/256 line of sec. 28.</p> <p>The C-W-W-SW. 1/256 cor. of sec. 28.</p>

Partial Subdivision of Certain Sections
Township 30 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS	Subdivision of Section 29
	<p>From the $\frac{1}{4}$ cor. of secs. 29 and 32.</p> <p>N. $0^{\circ} 07' E.$, along the meridional center line of sec. 29.</p> <p>Over gently rolling land, through scattering timber.</p>
20.05	<p>Point for the C-S. $1/16$ cor. of sec. 29.</p> <p>Set the iron post 26 ins. in the ground, cap mkd.</p> <p style="text-align: center;"> $\begin{array}{c} C \\ S\ 1/16 S29 \\ C \\ 1966 \end{array}$ </p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p>
31.50	<p>Small draw, drains NE.</p>
36.70	<p>Forest Service Route 7302, bears NW. and SE.; ascend rocky S. slope.</p>
40.10	<p>Point for the C. $\frac{1}{4}$ cor. of sec. 29.</p> <p>Set the iron post 6 ins. in the ground, to bedrock, and in a mound of stone, 4 ft. base to top, cap mkd.</p> <p style="text-align: center;"> $\begin{array}{c} C \\ \frac{1}{4} S29 \\ 1966 \end{array}$ </p> <p>from which</p> <p style="padding-left: 40px;">A pine, 16 ins. diam., bears S. $50\frac{1}{2}^{\circ} E.$, 124 lks. dist., mkd. $C\frac{1}{4} S29 BT.$</p> <p style="padding-left: 40px;">A pine, 8 ins. diam., bears S. $44^{\circ} W.$, 30 lks. dist., mkd. $C\frac{1}{4} S29 BT.$</p>
62.00	<p>Descend gentle N. slope.</p>
68.00	<p>Dry wash, 25 lks. wide, drains W.</p>
69.90	<p>Unimproved dirt road, bears generally E. and W.</p>
77.00	<p>Ascend rocky S. slope to cor.</p>
80.24	<p>The $\frac{1}{4}$ cor. of secs. 20 and 29.</p>
	<p>From the $\frac{1}{4}$ cor. of secs. 28 and 29.</p> <p>N. $89^{\circ} 53' W.$, along the latitudinal center line of sec. 29.</p> <p>Ascend gentle SE. slope through scattering timber.</p>
7.20	<p>Wire fence, bears NE. and SW.</p>
10.00	<p>Descend gentle SW. slope.</p>
16.00	<p>Over level open meadow.</p>
20.04	<p>Point for the C-E. $1/16$ cor. of sec. 29.</p> <p>Set the iron post 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, cap mkd.</p>

Partial Subdivision of Certain Sections
 Township 30 North, Range 3 East
 Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">E 1/16 C-----C S29 1966</p> <p>from which</p> <p>A pine, 20 ins. diam., bears S. 50° W., 26 lks. dist., mkd. CE 1/16 S29 BT.</p> <p>A pine, 12 ins. diam., bears N. 57° W., 125 lks. dist., mkd. CE 1/16 S29 BT.</p> <p>27.80 Unimproved dirt road, bears N. and S.</p> <p>33.70 Ascend gentle E. slope.</p> <p>40.08 The C. $\frac{1}{4}$ cor. of sec. 29.</p> <p>48.11 Forest Service Route 7302, bears NW. and SE.</p> <p>59.31 Intersection of Forest Route 7302, which bears NE. and SW. and Forest Route 7321, which bears NW.</p> <p>80.22 The $\frac{1}{4}$ cor. of secs. 29 and 30.</p>
	<p>Subdivision of the SE $\frac{1}{4}$ of Section 29</p>
	<p>From the E. 1/16 cor. of secs. 29 and 32.</p> <p>N. 0° 10' E., along the E. 1/16 line of secs. 29.</p> <p>10.03 Point for the C-S-SE. 1/64 cor. of sec. 29.</p> <p>Set the iron post 12 ins. in the ground to bedrock, and in a mound of stone, 2$\frac{1}{2}$ ft. base to top, cap mkd.</p> <p style="text-align: center;">S29 C-S-SE 1/64 1966</p>
	<p>20.05 Point for the SE. 1/16 cor. of sec. 29.</p> <p>Set the iron post 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, cap mkd.</p> <p style="text-align: center;">SE 1/16 S29 1966</p> <p>from which</p> <p>A pine, 21 ins. diam., bears N. 55$\frac{1}{2}$° E., 42 lks. dist., mkd. SE 1/16 S29 BT.</p> <p>A pine, 17 ins. diam., bears S. 66° W., 117 lks. dist., mkd. SE 1/16 S29 BT.</p>
	<p>25.21 Forest Route 7302, bears NW. and SE.</p>
	<p>30.08 Point for the C-N-SE. 1/64 cor. of sec. 29.</p> <p>Set the iron post 24 ins. in the ground, cap mkd.</p>

Partial Subdivision of Certain Sections
 Township 30 North, Range 3 East
 Gila and Salt River Meridian, Arizona

CHAINS	
	S29 C-N-SE 1/64 1966
40.10	The C-E. 1/16 cor. of sec. 29. <hr/> From the S. 1/16 cor. of secs. 28 and 29. N. 89° 52' W., along the S. 1/16 line of sec. 29.
14.40	Wire fence, bears NW. and SE.
15.02	Point for the C-W-E-SE. 1/256 cor. of sec. 29. Set the iron post 24 ins. in the ground, cap mkd.
	S29 C-W-E-SE 1/256 1966
16.32	Forest Service Route 7302 bears NW. and SE.
20.02	The SE. 1/16 cor. of sec. 29.
40.04	The C-S. 1/16 cor. of sec. 29.
15.01	From the S-S. 1/64 cor. of secs. 28 and 29. N. 89° 52' W., on the S-S. 1/64 line of sec. 29. Point for the C-W-SE-SE 1/256 cor. of secs. 29. Set an iron post, 18 ins. in the ground to bedrock, and in a mound of stone, 2½ ft. base to top, cap mkd.
	S29 C-W-SE-SE 1/256 1966
10.02	N. 0° 11' E., on the W-E-E. 1/256 line of sec. 29. The C-W-E-SE 1/256 cor. of sec. 29.
20.03	From the N-S 1/64 cor. of secs. 28 and 29. N. 89° 53' W., on the N-S. 1/64 line of sec. 29. The C-N-SE. 1/64 cor. of sec. 29.
	Subdivision of Section 33
	From the ¼ cor. of sec. 4 and 33, on the S. bdy. of the township. N. 0° 14' E., along the meridional center line of sec. 33.

Partial Subdivision of Certain Sections
Township 30 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS	
8.00	Descend gentle N. slope.
18.80	Small draw, drains NE.
25.00	Over level land.
40.25	Point for the C. $\frac{1}{4}$ cor. of sec. 33.
	Set the iron post 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, cap mkd.
	C $\frac{1}{4}$ S33 1966
	from which
	A pine, 8 ins. diam., bears N. 30° E., 44 lks. dist. mkd. C $\frac{1}{4}$ S33 BT.
	A pine, 24 ins. diam., bears S. 37 $\frac{1}{2}$ ° W., 189 lks. dist., mkd. C $\frac{1}{4}$ S33 BT.
43.85	Forest Service Route 7302 bears N. 60° W. and S. 60° E.
43.96	Cor. number 11 of H.E.S. 284, monumented with an iron pipe, 2 ins. diam., set and mkd. by the Forest Service in 1965.
52.06	Wire fence, bears NE. and SW.
60.31	Point for the C-N. 1/16 cor. of sec. 33.
	Set the iron post 24 ins. in the ground, cap mkd.
	C N1/16 S33 C 1966
66.14	Cor. number 10 of H.E.S. 284, monumented with an iron pipe, 2 ins. diam., set and mkd. by the Forest Service in 1965.
66.36	Wire fence, bears NW. and SE.; ascend gentle S. slope.
70.34	Point for the C-N-N. 1/64 cor. of sec. 33.
	Set the iron post 25 ins. in the ground, cap mkd.
	S33 C-N-N 1/64 1966
80.36	The $\frac{1}{4}$ cor. of secs. 28 and 33.
	From the $\frac{1}{4}$ cor. of secs. 33 and 34.
	N. 89° 42' W., along the latitudinal center line of sec. 33.
17.92	Intersect line 8-9 of H.E.S. 284. From this point, cor. number 9 bears N. 19° 05' W., 9.25 chs. dist.
21.34	Wire fence bears NW. and SE.; enter meadow.
33.19	Wire fence bears N. 60° W. and S. 60° E.

Partial Subdivision of Certain Sections
 Township 30 North, Range 3 East
 Gila and Salt River Meridian, Arizona

CHAINS	
33.22	Intersect line 11-12 of H.E.S. 284. From this point cor. number 11 bears N. 60° 25' W., 7.59 chs. dist.
36.20	Forest Service Route 7302, bears NW. and SE.
39.83	The C. $\frac{1}{4}$ cor. of sec. 33.
47.30	Small draw, drains NE.; ascend gentle SW. slope.
59.85	Point for the C-W. $\frac{1}{16}$ cor. of sec. 33.
	Set the iron post 18 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, cap mkd.
	W $\frac{1}{16}$ C ————— C S33 1966
79.86	The $\frac{1}{4}$ cor. of secs. 32 and 33.
Subdivision of the NW $\frac{1}{4}$ of Section 33	
	From the C-W. $\frac{1}{16}$ cor. of sec. 33.
	N. 0° 14' E., along the W. $\frac{1}{16}$ line of sec. 33.
20.06	Point for the NW. $\frac{1}{16}$ cor. of sec. 33.
	Set the iron post 24 ins. in the ground, cap mkd.
	NW $\frac{1}{16}$ S33 1966
23.36	Forest Service Route number 7302 bears NW. and SE.
25.07	Point for the C-S-N-NW. $\frac{1}{256}$ cor. of sec. 33.
	Set the iron post 14 ins. in the ground to bedrock, and in a mound of stone, 2 $\frac{1}{2}$ ft. base to top, cap mkd.
	S33 C-S-N-NW $\frac{1}{256}$ 1966
25.22	Wire fence, bears NW. and SE.
27.97	Descend gentle N. slope.
30.09	Point for the C-N-NW. $\frac{1}{64}$ cor. of sec. 33.
	Set the iron post 24 ins. in the ground, cap mkd.
	S33 C-N-NW $\frac{1}{64}$ 1966
35.10	Point for the C-N-N-NW. $\frac{1}{256}$ cor. of sec. 33.
	Set the iron post 25 ins. in the ground, cap mkd.
	S33 C-N-N-NW $\frac{1}{256}$ 1966

Partial Subdivision of Certain Sections
 Township 30 North, Range 3 East
 Gila and Salt River Meridian, Arizona

<p>CHAINS 40.12</p>	<p>The W. 1/16 cor. of secs. 28 and 33.</p> <hr/> <p>From the C-N. 1/16 cor. of sec. 33. N. 89° 42' W., along the N. 1/16 line of sec. 33. Over level open land.</p> <p>7.00 Enter scattering timber; ascend gentle NE. slope.</p> <p>10.01 Point for the C-E-NW. 1/64 cor. of sec. 33. Set the iron post 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, cap mkd.</p> <p style="text-align: center;">S33 C-E-NW 1/64 1966</p> <p>15.91 Wire fence, bears NW. and SE.</p> <p>18.44 Forest Service Route 7302 bears NW. and SE.</p> <p>20.02 The NW. 1/16 cor. of sec. 33.</p> <p>30.00 Descend gentle W. slope.</p> <p>40.04 The N. 1/16 cor. of secs. 32 and 33.</p> <hr/> <p style="text-align: center;">Subdivision of the NE$\frac{1}{4}$ of the NW$\frac{1}{4}$ of sec. 33</p> <hr/> <p>From the C-E-NW. 1/64 cor. of sec. 33. N. 0° 14' E., on the E-W. 1/64 line of sec. 33.</p> <p>5.01 Point for the C-S-NE-NW 1/256 cor. of sec. 33. Set the iron post 24 ins. in the ground, cap mkd.</p> <p style="text-align: center;">S33 C-S-NE-NW 1/256 1966</p> <p>10.03 Point for the NE-NW. 1/64 cor. of sec. 33. Set the iron post 24 ins. in the ground, cap mkd.</p> <p style="text-align: center;">S33 NE-NW 1/64 1966</p> <p>16.30 Wire fence, bears NW. and SE.</p> <p>20.06 The E-W. 1/64 cor. of secs. 28 and 33.</p> <hr/> <p>From the C-N-N. 1/64 cor. of sec. 33. N. 89° 41' W., on the N-N. 1/64 line of sec. 33.</p> <p>5.01 Point for the C-E-NE-NW. 1/256 cor. of sec. 33.</p>
-------------------------	--

Partial Subdivision of Certain Sections
 Township 30 North, Range 3 East
 Gila and Salt River Meridian, Arizona

CHAINS	Set the iron post 26 ins. in the ground, cap mkd.
	<p>S33 C-E-NE-NW 1/256 1966</p>
10.01	The NE-NW. 1/64 cor. of sec. 33.
15.02	Point for the C-W-NE-NW. 1/256 cor. of sec. 33.
	Set the iron post 24 ins. in the ground, cap mkd.
	<p>S33 C-W-NE-NW 1/256 1966</p>
20.02	The C-N-NW. 1/64 cor. of sec. 33.
	From the C-E-NE-NW. 1/256 cor. of sec. 33.
	N. 0° 14' E., on the E-E-W. 1/256 line of sec. 33.
10.02	The E-E-W. 1/256 cor. of secs. 28 and 33.
	From the C-S-NE-NW. 1/256 cor. of sec. 33.
	N. 89° 42' W., on the S-N-N. 1/256 line of sec. 33.
5.00	Point for the SW-NE-NW. 1/256 cor. of sec. 33.
	Set the iron post 24 ins. in the ground, cap mkd.
	<p>S33 SW-NE-NW 1/256 1966</p>
	N. 0° 14' E., on the W-E-W. 1/256 line of sec. 33.
5.02	The C-W-NE-NW. 1/256 cor. of sec. 33.
	Subdivision of the NW $\frac{1}{4}$ of the NW $\frac{1}{4}$ of sec. 33
	From the C-N-N-NW. 1/256 cor. of sec. 33.
	N. 89° 41' W., on the N-N-N. 1/256 line of sec. 33.
15.02	Point for the NW-NW-NW. 1/256 cor. of sec. 33.
	Set the iron post 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, cap mkd.
	<p>S33 NW-NW-NW 1/256 1966</p>
	N. 0° 13' E., on the W-W-W. 1/256 line of sec. 33.
5.02	The W-W-W. 1/256 cor. of secs. 28 and 33.

26

CERTIFICATE OF SURVEY

I, Leonard W. Murphy, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 4th day of February, 19 66,

I have dependently resurveyed a portion of the south boundary, portion of the section lines and subdivided sections 28, 29 and 33, Township 30 North, Range 3 East.

of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

February 16, 1967 (Date)

Leonard W. Murphy (Cadastral Surveyor) Leonard W. Murphy (Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL Date FEB 21 1967

BUREAU OF LAND MANAGEMENT, Washington, D. C.

The foregoing field notes of the dependent resurvey of a portion of the south boundary, portions of the section lines and subdivision of sections 28, 29 and 33, Township 30 North, Range 3 East, Gila and Salt River Meridian, Arizona

executed by Leonard W. Murphy, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

JUN 1 (Date)

E. S. Livingston (Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in, is a true copy of the original field notes.

(Date) (Chief, Division of Engineering)