

Form 4-679  
(January 1963)

BOOK 4819  
UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FIELD NOTES

of

REMONUMENTATION

of

FORT APACHE INDIAN RESERVATION BOUNDARY

in

Township 10 North, Range 17 East

Of the Gila and Salt River Meridian,

In the State of Arizona.

EXECUTED BY

Wallace R. Ott, Supervisory Surveying Technician

Under special instructions dated March 28, 19 66, which provided for the surveys  
included under Group Number 446, approved March 29, 1966,  
and assignment instructions dated June 28, 19 66.


Survey commenced July 6, 19 66

Survey completed October 25, 19 66

Corner	Page	Corner	Page	Corner	Page
Mile Corner 97	--- 1	Angle Point 810	--- 6	Angle Point 822	--- 11
Angle Point 796	--- 1	" " 811	--- 6	" " 823	--- 11
" " 798	--- 2	Mile Corner 98½	--- 7	" " 824	--- 12
" " 799	--- 2	Angle Point 812	--- 7	Mile Corner 100	--- 12
" " 800	--- 2	" " 813	--- 8	Angle Point 826	--- 12
Mile Corner 97½	-- 3	" " 814	--- 8	Mile Corner 100½	--- 13
Angle Point 801	--- 3	" " 815	--- 8	Angle Point 827	--- 13
" " 803	--- 3	" " 816	--- 8	" " 829	--- 13
" " 804	--- 4	" " 817	--- 9	Mile Corner 101	--- 14
" " 805	--- 4	Mile Corner 99	--- 9	" " 101½	--- 14
" " 806	--- 4	Angle Point 818	--- 9	Angle Point 830	--- 15
Mile Corner 98	--- 5	" " 819	--- 10	" " 834	--- 15
Angle Point 807	--- 5	" " 820	--- 10	Mile Corner 102½	--- 15
" " 808	--- 6	Mile Corner 99½	--- 10	Angle Point 835	--- 16
" " 809	--- 6	Angle Point 821	--- 11	" " 836	--- 16

## INDEX DIAGRAM

Township 10 North, Range 17 East,

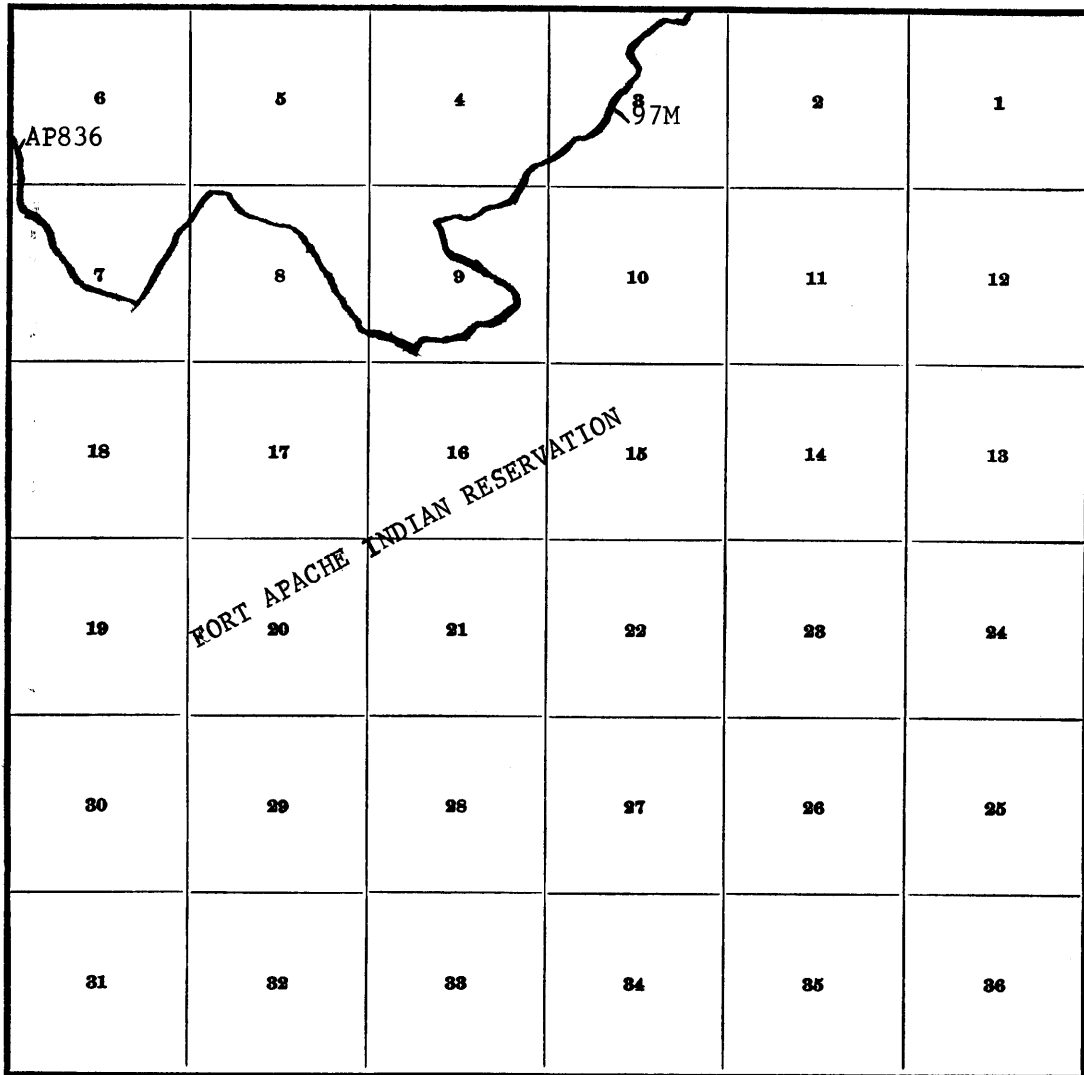

CHAINS

The Fort Apache Indian Reservation boundary through Township 10 North, Range 17 East, was surveyed in 1887 by Wallace and resurveyed in 1906 by J. B. Wright.

The following field notes are those of remonumentation of cadastral survey corners by agreement with the U. S. Forest Service. The detailed cooperative agreement was approved by the Director, Bureau of Land Management, by memorandum (5.04b) dated October 16, 1958.

The approval of the Special Instructions on March 29, 1966 gave authority to proceed with the remonumentation in accordance with the Director's Order No. 541, dated April 21, 1961.

The assistants furnished by the Forest Service remonumented the original corner positions after verification. An open sight compass was used to obtain the bearings and a standard steel tape was used to measure the distances to corner accessories.

---

Remonumentation, Fort Apache Indian Reservation  
Bdy., T. 10 N., R. 17 E., Arizona

---

The 97 mile cor., monumented by a quartz stone, 10 x 10 x 12 ins., firmly set, with a mound of stone NE., mkd. 97M on NE. face and BMFR on NW. face, from which the original bearing trees

A pine, 22 ins. diam., bears North, 38 lks. dist., mkd. NBWMIR 97M BT

A pine, 16 ins. diam., bears S. 71° E., 28 lks. dist., mkd. NBWMIR 97M BT

A pine, 18 ins. diam., bears S. 13° W., 40 lks. dist., mkd. NBWMIR 97M BT

A pine, 28 ins. diam., bears N. 70° W., 77 lks. dist., mkd. NBWMIR 97M BT

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, mound of stone to top, brass cap mkd.

T10N		
R17E		FAIR
S3		97M
1966		

Bury the original corner stone alongside the iron post.

Cor. is on nearly level land in thick timber 50 lks. E. of a fence which bears NE. and SW.

---

The point for angle point 796, monumented by a hole left by a fallen pine, which was the cor., tree mkd. APNBWMIR 796.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, mound of stone to top, brass cap mkd.


BOOK 4819

Remonumentation, Fort Apache Indian Reservation  
Bdy., T. 10 N., R. 17 E., Arizona

2.

2

CHAINS




The angle point is on nearly level land in thick timber about 1.00 ch. E. of a fence bearing NE. and SW.

The point for angle point 798, monumented by a hole left by a fallen pine, which was the cor., tree mkd. APNBWMIR 798 on one side and BMFR on another side.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, mound of stone to top, brass cap mkd.




The angle point is on a gentle NW. slope in moderate timber about 80 lks. E. of a fence bearing N. and S.

Angle point 799, monumented by a live pine tree, 14 ins. diam., part of scribe mks. visible.

from which

An iron post, 30 ins. long, 2½ ins. diam., set 22 ins. in the ground, and in a mound of stone to top, for a reference monument, bears N. 79°37' E., 20 lks. dist., brass cap mkd.



An iron post, 30 ins. long, 2½ ins. diam., set 18 ins. in the ground, and in a mound of stones to the top, for a reference monument, bears S. 42°30' W., 20 lks. dist., brass cap mkd.




The angle point is on rolling land about 1.00 ch. N. of a fence bearing E. and W.

The point for angle point 800, monumented by a hole left by a fallen tree, which was the cor., tree mkd. BMFR.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, brass cap mkd.



CHAINS

from which

A pine, 10 ins. diam., bears N. 69° E., 64 lks.  
dist., mkd. AP800 BT

A pine, 16 ins. diam., bears S. 71° E., 61 lks.  
dist., mkd. AP800 BT

The angle point is on rolling land, 40 lks. N. of a  
fence bearing NE. and SW., and about 2.50 chs. S. of  
the rim road which bears NE. and SW.

The 97½ mile cor., monumented by a quartz stone, 8 x  
12 x 12 ins., firmly set with a mound of stone alongside,  
mkd. 97½M on NE. face, from which the remains of the  
original bearing trees

A pine, 12 ins. diam., bears S. 4° E., 15 lks.  
dist., mkd. with an overgrown blaze


A pine, 16 ins. diam., bears S. 59½° W., 27 lks.  
dist., mkd. with an overgrown blaze

A pine, 14 ins. diam., bears S. 89° W., 32 lks.  
dist., mkd. with an overgrown blaze

A stump hole, bears N. 2¾° W., 36 lks. dist.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins.  
in the ground, mound of stone to top, brass cap mkd.



Bury the original corner stone alongside the iron post.

Cor. is on rolling land in thick timber 3 lks. E. of  
a fence bearing NE. and SW.


Angle point 801, monumented by a live pine tree, 18 ins.  
diam., mkd. with an overgrown blaze, from which new  
bearing trees

A pine, 10 ins. diam., bears N. 78° E., 18 lks.  
dist., mkd. AP801 FAIR BT

A pine, 14 ins. diam., bears N. 60½° W., 47 lks.  
dist., mkd. AP801 BT

The angle point is 4 lks. E. of a fence bearing NE. and  
SW., and about 2.00 chs. E. of a gravel road which  
bears NE. and SW.

Angle point 803, monumented by an iron post, 36 ins.  
long, 1 in. diam., loosely set, with brass cap mkd.



BOOK 4819

Remonumentation, Fort Apache Indian Reservation  
Bdy., T 10 N., R. 17 E., Arizona

4

4.

CHAINS

At the cor. point

I reset the 1 in. iron post, 26 ins. in the ground, mound of stone to top, mkd. with the date, 1966, on the cap above the 1935.

from which

A pine, 16 ins. diam., bears S.  $3\frac{1}{2}^{\circ}$  W., 111 lks. dist., mkd. AP803 FAIR BT

A pine, 6 ins. diam., bears N.  $81\frac{1}{2}^{\circ}$  W.,  $20\frac{1}{2}$  lks. dist., mkd. AP803 S4 BT


The angle point is on a N. slope in thick timber 5 lks. W. of a fence bearing N. and S.

The point for angle point 804, monumented by a hole left by a fallen pine, which was the cor., tree mkd. APNBWMIR 804 on one side and BMFR on another side, from which the remains of the original bearing trees

A pine, 20 ins. diam., bears S.  $55^{\circ}$  W., 42 lks. dist., mkd. with an overgrown blaze

At the cor. point

Set an iron post, 30 ins. long,  $2\frac{1}{2}$  ins. diam., 20 ins. in the ground, mound of stone to top, brass cap mkd.




The angle point is on a rolling N. slope in thick timber about 1.50 chs. E. of a fence bearing N. and S.

The point for angle point 805, monumented by a hole left by a fallen pine, which was the cor., tree mkd. APNBWMIR 805 on one side.

At the cor. point

Set an iron post, 30 ins. long,  $2\frac{1}{2}$  ins. diam., 24 ins. in the ground, collar of stone to top, brass cap mkd.



The angle point is on rolling land in thick timber about 1.00 ch. W. of a fence bearing NE. and SW.

Angle point 806, monumented by a live oak tree, 18 ins. diam., mkd. with part of scribe mks. visible, from which new bearing trees

A pine, 8 ins. diam., bears S.  $44^{\circ}$  W., 48 lks. dist., mkd. AP806 FAIR BT

A pine, 17 ins. diam., bears N.  $10^{\circ}$  W., 21 lks. dist., mkd. AP806 S4 BT

BOOK 4819

Remonumentation, Fort Apache Indian Reservation  
Bdy., T. 10 N., R. 17 E., Arizona

5.

CHAINS

The angle point is on nearly level land in thick timber 40 lks. W. of a fence bearing NE. and SW.

The 98 mile cor., monumented by a sandstone, 5 x 10 x 20 ins., firmly set with a small mound of stone N., mkd. with dim chisel mks., from which the remains of the original bearing trees

A pine stump, bears S.  $13\frac{1}{2}^{\circ}$  E., 52 lks. dist., mkd. with part of scribe mks. visible

A dead pine, 18 ins. diam., bears South, 37 lks. dist., mkd. NBWMIR 98M BT

A dead pine, 18 ins. diam., bears S.  $41\frac{1}{2}^{\circ}$  W., 22 lks. dist., mkd. NBWMIR 98M BT

At the cor. point

Set an iron post, 30 ins. long,  $2\frac{1}{2}$  ins. diam., 24 ins. in the ground, brass cap mkd.

T10N  
R17E  
S9

~~FAIR~~  
98M  
1966

from which

A juniper, 16 ins. diam., bears S.  $57^{\circ}$  W., 59 lks. dist., mkd. 98M FAIR BT

A pine, 5 ins. diam., bears N.  $71^{\circ}$  W., 46 lks. dist., mkd. 98M BT

Raise a mound of stone E. of the iron post.

Bury the original corner stone alongside the iron post.

Cor. is on a NE. slope in thick timber 5 lks. N. of a fence bearing E. and W.

Angle point 807, monumented by a broken sandstone, parts of stone set, mkd. with dim chisel mks., from which the remains of the original bearing trees

An oak, 10 ins. diam., bears S.  $60\frac{1}{2}^{\circ}$  W., 52 lks. dist., mkd. with a rotted out blaze

At the cor. point

Set an iron post, 30 ins. long,  $2\frac{1}{2}$  ins. diam., 22 ins. in the ground, mound of stone to top, brass cap mkd.

T10N  
R17E  
S9

~~FAIR~~  
AP807  
1966

from which

A pine, 10 ins. diam., bears N.  $65^{\circ}$  W., 40 lks. dist., mkd. AP807 BT

The angle point is on an E. slope in thick timber 42 lks. N. of a fence bearing E. and W.

BOOK 4819

Remonumentation, Fort Apache Indian Reservation  
Bdy., T. 10 N., R. 17 E., Arizona


6.

CHAINS

The point for angle point 808, monumented by a hole left by a fallen pine tree, which was the original cor., tree mkd. with part of scribe mks. visible.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, mound of stone to top, brass cap mkd.



from which

A pine, 8 ins. diam., bears S. 77° E., 70 lks. dist., mkd. AP808 FAIR BT

A juniper, 6 ins. diam., bears N. 75° W., 40½ lks. dist., mkd. AP808 BT

The angle point is on a S. slope on the E. edge of a track road bearing N. and S.

Angle point 809, monumented by a pine stump, 5 ft. high, 24 ins. diam., mkd. APNBWMIR 809 on NE. face and BMFR on SE. face, from which new bearing trees

A pine, 18 ins. diam., bears S. 89° E., 113 lks. dist., mkd. AP809 FAIR BT

A pine, 15 ins. diam., bears N. 41° W., 83 lks. dist., mkd. AP809 BT

The angle point is in a fence bearing N. and S.

Angle point 810, monumented by a live pine tree, 28 ins. diam., mkd. APNBWMIR 810 BT on NE. face and BMFR on W. face, from which new bearing trees

A pine, 26 ins. diam., bears N. 15½° E., 35 lks. dist., mkd. AP810 FAIR BT

A pine, 22 ins. diam., bears S. 12° E., 75 lks. dist., mkd. AP810 BT

An original mound of stone, bears N. 67° W., 20 lks. dist.

The angle point is on a NE. slope in thick timber about 1.50 chs. E. of a N. and S. fence.

The point for angle point 811 is reestablished by record dist. from the remains of the original bearing trees

A pine stump, bears S. 81° W., 21 lks. dist., mkd. with part of a blaze

A dead pine, 12 ins. diam., bears N. 3° W., 29 lks. dist., mkd. with part of scribe mks. visible

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, mound of stone to top, brass cap mkd.




BOOK 4819

Remonumentation, Fort Apache Indian Reservation  
Bdy., T. 10 N., R. 17 E., Arizona

7.

CHAINS



from which

A pine, 8 ins. diam., bears S.  $28\frac{1}{2}^{\circ}$  E., 47 lks. dist., mkd. AP811 BT

A pine, 17 ins. diam., bears N.  $28^{\circ}$  W., 75 lks. dist., mkd. AP811 FAIR BT

The angle point is on rolling land in thick timber 20 lks. S. of an E. and W. fence

The point for the  $98\frac{1}{2}$  mile cor. is reestablished by record course and dist. from the original bearing trees


A pine, 16 ins. diam., bears S.  $86\frac{1}{2}^{\circ}$  W., 45 lks. dist.

A juniper, 30 ins. diam., bears S.  $38^{\circ}$  W., 33 lks. dist.

A pine stump, bears N.  $12^{\circ}$  E., 47 lks. dist.

At the cor. point

Set an iron post, 30 ins. long;  $2\frac{1}{2}$  ins. diam., 30 ins. in the ground, brass cap mkd.




Cor. is in center of dim track road, which bears NW. and SE., and 20 lks. S. of a barbed wire fence which bears NW. and SE.

The point for angle point 812, monumented by a hole left by a fallen pine tree, which was the original cor., tree mkd. with most of the scribe mks. visible.

At the cor. point

Set an iron post, 30 ins. long,  $2\frac{1}{2}$  ins. diam., 22 ins. in the ground, mound of stone to top, brass cap mkd.



from which

A pine, 8 ins. diam., bears S.  $88\frac{1}{2}^{\circ}$  E., 47 lks. dist., mkd. AP812 FAIR BT

A pine, 14 ins. diam., bears S.  $20\frac{1}{2}^{\circ}$  E., 47 lks. dist., mkd. AP812 BT

BOOK 4819

Remonumentation, Fort Apache Indian Reservation  
Bdy., T. 10 N., R. 17 E., Arizona

8

8.

CHAINS

The angle point is on top of a ridge which bears NW. and SE. and about 50 lks. E. of a fence bearing NW. and SE.

Angle Point 813, monumented by a live pine tree, 15 ins. diam., mkd. APNBWMIR 813 on NE. face and BMFR on SW. face, from which new bearing trees

A pine, 14 ins. diam., bears S. 12° W., 45 lks. dist., mkd. AP813 BT

A pine, 10 ins. diam., bears N. 60½° E., 58 lks. dist., mkd. AP813 FAIR BT

The angle point is on rolling land in moderate timber and 30 lks. E. of a barbed wire fence which bears N. and S., and 80 lks. E. of a track road bearing N. and S.

Angle point 814, monumented by a dead pine tree, 22 ins. diam., mkd. APNBWMIR 814 on NE. face and BMFR on SW. face, from which new bearing trees

An oak, 6 ins. diam., bears S. 79° W., 9 lks. dist., mkd. AP814 BT

A pine, 20 ins. diam., bears S. 87° E., 67 lks. dist., mkd. AP814 FAIR BT

The angle point is on an E. slope in moderate timber about 1.00 ch. E. of a fence bearing NW. and SE. and about 1.20 chs. E. of a track road which bears NW. and SE.

Angle point 815, monumented by a dead pine tree, 20 ins. diam., mkd. APNBWMIR 815 on NE. face and BMFR on SW. face, from which new bearing trees

A pine, 30 ins. diam., bears N. 3½° W., 39 lks. dist., mkd. AP815 FAIR BT

An oak, 4 ins. diam., bears S. 16° E., 39 lks. dist., mkd. X BT

The angle point is on top of a ridge which bears NW. and SE. in a barbed wire fence, bearing NW. and SE., in thick timber.

The point for angle point 816, monumented by a hole left by a fallen tree, which was the original cor., tree mkd. with part of the scribe mks. visible.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, mound of stone to top, brass cap mkd.

T10N  
R17E  
S9

FAIR  
AP816

1966

The angle point is about 1.00 ch. W. of the top of a narrow ridge which bears NW. and SE., and 50 lks. E. of a fence which bears NW. and SE.

BOOK 4819

Remonumentation, Fort Apache Indian Reservation  
Bdy., T. 10 N., R. 17 E., Arizona

9.

CHAINS

Angle point 817, monumented by a pine tree, 30 ins. diam., mkd. APNBWMIR 817 on E. face and BMFR on W. face, from which new bearing trees

A pine, 5 ins. diam., bears N. 55° E., 55 lks. dist., mkd. AP817 FAIR BT

An oak, 4 ins. diam., bears S. 84° W., 46 lks. dist., mkd. AP817 BT

The angle point is on the SW. edge of a narrow ridge which bears NW. and SE. in thick timber and undergrowth.

The 99 mile cor., monumented by a sandstone, 18 x 14 x 6 ins., firmly set, mkd. 99M on NE. face and NBWMIR on SE. face, from which the original bearing trees

An oak, 10 ins. diam., bears S. 35½° W., 16 lks. dist., mkd. with an overgrown blaze

An oak, 12 ins. diam., bears S. 20° E., 29 lks. dist., mkd. NBWMIR 99M BT

A pine, 20 ins. diam., bears S. 79° E., 29 lks. dist., mkd. with part of scribe mks. visible

A pine, 18 ins. diam., bears S. 13° W., 43 lks. dist., mkd. with an overgrown blaze

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, mound of stone to top, brass cap mkd.

T10N  
R17E  
S9  
/ FAIR  
99M  
1966

Bury the original corner stone alongside the iron post.

Cor. is on steep NW. slope in thick timber 10 lks. N. of a fence which bears E. and W., and 50 lks. SW. of a wash, drains SW.

The point for angle point 818, monumented by a hole left by a fallen pine tree, which was the original cor., tree mkd. with part of scribe mks. visible.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, mound of stone to top, brass cap mkd.

T10N  
R17E  
S9  
/ FAIR  
AP818  
1966

The angle point is on an E. slope in medium to thick timber and in an E. and W. fence.

BOOK 4819

Remonumentation, Fort Apache Indian Reservation  
Bdy., T. 10 N., R. 17 E., Arizona

10.

10

CHAINS

Angle point 819, monumented by a pine tree, 34 ins. diam., mkd. APNBWMIR 819 on S. face and BMFR on N. face, from which new bearing trees

A juniper, 15 ins. diam., bears S. 88° W., 29 lks. dist., mkd. AP819 BT

An oak, 7 ins. diam., bears S. 4° E., 51 lks. dist., mkd. AP819 FAIR BT

Original mound of stone bears S. 83° E., 40 lks. dist.

The angle point is on top of a ridge which bears NW. and SE., and in a fence which bears NE. and SW.

Angle point 820, monumented by a pine tree, 18 ins. diam., mkd. APNBWMIR 820 on S. face and BMFR on N. face, from which new bearing trees

A pine, 16 ins. diam., bears S. 31½° E., 66½ lks. dist., mkd. AP820 FAIR BT

An oak, 16 ins. diam., bears S. 83° W., 20 lks. dist., mkd. AP820 BT

The angle point is on a SW. slope in thick timber and undergrowth and is 30 lks. N. of an E. and W. fence.

The 99½ mile cor., monumented by a sandstone, 20 x 12 x 10 ins., firmly set, with mound of stone to the E., mkd. 99½M on E. face and NBWMIR on S. face, from which the original bearing trees

A dead pine, 20 ins. diam., bears N. 37° E., 16 lks. dist., mkd. NBWMIR 99½M BT

A pine, 18 ins. diam., bears S. 52° W., 25 lks. dist., mkd. with an overgrown blaze

A dead pine, bears S. 84° W., 72 lks. dist., mkd. with part of scribe mks. visible

A pine snag, bears N. 77° W., 113 lks. dist., mkd. with part of scribe mks. visible

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, brass cap mkd.

T10N  
R17E  
S9

FAIR  
99½M  
1966

from which

A pine, 22 ins. diam., bears N. 37½° E., 59½ lks. dist., mkd. AP 99½M BT

Raise a mound of stone NW. of the iron post.

Bury the original corner stone in the mound of stone NW. of the iron post.

BOOK 4819

Remonumentation, Fort Apache Indian Reservation  
Bdy., T. 10 N., R. 17 E., Arizona

11.

CHAINS

Cor. is on an E. slope in heavy timber 5 lks. N. of a fence which bears E. and NW., and 30 lks. S. of the end of a track road which bears NW.

Angle point 821, monumented by a pine tree, 24 ins. diam., mkd. APNBWMIR 821 on S. face and BMFR on N. face, from which new bearing trees

A pine, 22 ins. diam., bears South, 17 lks. dist., mkd. AP821 FAIR BT


A pine, 5 ins. diam., bears N. 39° W., 31 lks. dist., mkd. AP821 BT

The angle point is on an E. slope in heavy timber about 80 lks. S. of a fence which bears NW. and SE.

The point for angle point 822, monumented by a hole left by a fallen tree, which was the original cor., tree mkd. APNBWMIR 822 on one side and WBMR on the other side.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, mound of stone to top, brass cap mkd.




The angle point is in thick timber 10 lks. S. of a fence which bears NW. and SE., and about 100 lks. S. of a track road which bears NW. and SE.

Angle point 823, monumented by an iron post, 1 in. diam., partially pushed and bent out of the ground, from which the original bearing tree

A dead pine, bears S. 38° E., 20 lks. dist., mkd. AP823 BT

At the cor. point

I reset the iron post, 1 in. diam., 30 ins. in the ground, mound of stone to top, brass cap mkd.



from which

A pine, 4 ins. diam., bears N. 4° W., 32 lks. dist., mkd. X BT

A pine, 5 ins. diam., bears S. 48° W., 26½ lks. dist., mkd. X BT

The angle point is on a SW. slope in thick timber 40 lks. NE. of a fence which bears SE. and W.

BOOK 4819

Remonumentation, Fort Apache Indian Reservation  
Bdy., T. 10 N., R. 17 E., Arizona

12.

12

CHAINS

Angle point 824, monumented by a pine tree, 18 ins. diam., mkd. APNBWMIR 824 on S. face and BMFR on N. face, from which new bearing trees

A pine, 18 ins. diam., bears S.  $58\frac{1}{2}^{\circ}$  W., 38 lks. dist., mkd. AP824 FAIR BT

A pine, 8 ins. diam., bears N.  $63^{\circ}$  E., 65 lks. dist., mkd. AP824 BT

The angle point is on a SW. slope in thick timber about 1.00 ch. S. of fence which bears NW. and SE.

The 100 mile cor., monumented by a sandstone, 18 x 14 x 14 ins., firmly set in mound of stone, mkd. with part of the scribe mks. visible, from which the original bearing trees

A pine, 15 ins. diam., bears S.  $67^{\circ}$  E., 53 lks. dist., mkd. with an overgrown blaze


A pine, 15 ins. diam., bears S.  $73^{\circ}$  E., 53 lks. dist., mkd. NBWMIR 100M BT

A pine stump, bears N.  $20^{\circ}$  E., 50 lks. dist.

A pine stump, bears N.  $3^{\circ}$  W., 21 lks. dist.

At the cor. point

Set an iron post, 30 ins. long,  $2\frac{1}{2}$  ins. diam., 20 ins. in the ground, mound of stone to top, brass cap mkd.



from which

A pine, 22 ins. diam., bears N.  $24^{\circ}$  E., 76 lks. dist., mkd. 100M BT

Bury the original corner stone alongside the iron post.

Cor. is on steep NW. slope in heavy timber 25 lks. S. of a fence which bears NW. and SE.

Angle point 826, monumented by a pine tree, 14 ins. diam., mkd. with part of scribe mks. visible on one side, from which new bearing trees

A pine, 14 ins. diam., bears N.  $16^{\circ}$  E., 22 lks. dist., mkd. AP826 BT

A pine, 20 ins. diam., bears S.  $52^{\circ}$  W., 36 lks. dist., mkd. AP826 FAIR BT

The angle point is on a SW. slope in moderate timber 5 lks. W. of a fence which bears NW. and SE.

CHAINS

The 100½ mile cor., monumented by a quartz stone, 14 x 14 x 12 ins., firmly set, mkd. with part of notch mks. visible, mound of stone to the SE., from which the original bearing trees

A pine, 36 ins. diam., bears S. 8° E., 124 lks. dist., mkd. with part of scribe mks. visible


A pine, 34 ins. diam., bears S. 82° E., 22 lks. dist., mkd. with an overgrown blaze

An oak, 12 ins. diam., bears S. 75° W., 85 lks. dist., mkd. with an overgrown blaze

A juniper, 44 ins. diam., bears N. 76½° W., 114 lks. dist., mkd. with part of scribe mks. visible

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, mound of stone to top, brass cap mkd.



Bury the original corner stone alongside the iron post.

Cor. is on a steep SW. slope in heavy timber about 70 lks. S. of an E. and W. fence.

Angle point 827, monumented by a pine tree, 20 ins. diam., mkd. APNBWMIR 827 on S. face, from which new bearing trees

A pine, 18 ins. diam., bears N. 16° W., 115 lks. dist., mkd. AP827 BT

A pine, 22 ins. diam., bears S. 40° E., 130 lks. dist., mkd. AP827 FAIR BT

The angle point is on top of a ridge which bears NW. and SE., 30 lks. W. of a track road which bears NW. and SE.

Angle point 829, monumented by a pine tree, 16 ins. diam., mkd. APNBWMIR 829 on S. face and an overgrown blaze on N. face, from which new bearing trees

A pine, 17 ins. diam., bears S. 10½° E., 13 lks. dist., mkd. AP829 FAIR BT

A pine, 9 ins. diam., bears N. 55° W., 36 lks. dist., mkd. AP829 BT

An original mound of stone bears N. 26° W., 42 lks. dist.

The angle point is on a small spur sloping S. in an old fence line, which bears SW. and E., and about 40 lks. S. of a new fence which bears irregularly E. and W.

14

CHAINS

The 101 mile cor., monumented by a quartz stone, 14 x 10 x 8 ins., lying on top of ground, mkd. with part of scribe mks. visible on cor. of stone, from which the original bearing trees


A dead pine, 36 ins. diam., bears N. 10° W., 46 lks. dist., mkd. NBWMIR 101 BT

A pine stump, bears N. 25° E., 63 lks. dist.

A pine, 36 ins. diam., bears S. 41½° E., 53 lks. dist., mkd. with an overgrown blaze

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, mound of stone to top, brass cap mkd.



from which

A pine, 18 ins. diam., bears N. 55° W., 50 lks. dist., mkd. 101M BT

A pine, 7 ins. diam., bears N. 47° E., 53 lks. dist., mkd. 101M FAIR BT

Bury the original corner stone alongside the iron post.

Cor. is on a SW. slope in thick timber in an old fence.

The 101½ mile cor., monumented by a quartz stone, 14 x 12 x 8 ins., firmly set in a mound of stone, mkd. with parts of mks. visible on stone, from which the original bearing trees

An oak, 18 ins. diam., bears S. 84° W., 38 lks. dist., mkd. with an overgrown blaze


An oak, 16 ins. diam., bears S. 18° E., 43 lks. dist., mkd. with an overgrown blaze

An oak, 9 ins. diam., bears S. 55° W., 63 lks. dist., mkd. with an overgrown blaze

An oak, 12 ins. diam., bears S. 79° E., 71 lks. dist., mkd. with an overgrown blaze

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, mound of stone to top, brass cap mkd.



from which

An oak, 6 ins. diam., bears S. 16° E., 29 lks. dist., mkd. 101½M FAIR BT



BOOK 4819

Remonumentation, Fort Apache Indian Reservation  
Bdy., T. 10 N., R. 17 E., Arizona

15.

CHAINS

An oak, 6 ins. diam., bears N. 44° W., 27 lks.  
dist., mkd. 101½M BT

Bury the original corner stone alongside the iron post.

Cor. is on a SE. slope in thick timber.

The point for angle point 830, monumented by a hole  
where a pine tree stood, which was the original cor.,

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins.  
in the ground, mound of stone to top, brass cap mkd.



An original mound of stone bears S. 7½° E., 23 lks. dist.

Cor. is on top of narrow spur, projecting S. about 4.00  
chs. to end of thick timber.

Angle point 834, monumented by a juniper tree, 34 ins.  
diam., mkd. APNBWMIR 834 on SW. face and BMFR on NW.  
face, from which new bearing trees

A pine, 10 ins. diam., bears N. 82° W., 25 lks.  
dist., mkd. AP834 FAIR BT

A pine, 12 ins. diam., bears S. 21° W., 32 lks.  
dist., mkd. AP834 FAIR BT

The angle point is on a SW. slope of a spur 10 lks. E.  
of a fence which bears N. and S.

The 102½ mile cor., monumented by a sandstone, 20 x 14 x  
12 ins., firmly set in ground, with mound of stone  
alongside, mkd. NBWMIR 102½M, from which the original  
bearing trees

A pine, 18 ins. diam., bears N. 85° W., 17 lks.  
dist., mkd. with an overgrown blaze


A pine, 18 ins. diam., bears N. 66° W., 21 lks.  
dist., mkd. NBWMIR 102½M BT

A pine, 22 ins. diam., bears N. 9°45' E., 29 lks.  
dist., mkd. NBWMIR 102½M BT

An oak, 14 ins. diam., bears S. 45° E., 9 lks.  
dist., mkd. with an overgrown blaze

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins.  
in the ground, mound of stone to top, brass cap mkd.



16

CHAINS

Bury the original corner stone alongside the iron post.  
Cor. is 40 lks. W. of a fence bearing N. and S.

Angle point 835, monumented by a large mound of stone,  
the center of which is accepted as the original cor.,  
from which the original bearing trees

An oak, 14 ins. diam., bears N. 51° E., 36 lks.  
dist., mkd. with an overgrown blaze

A pine, 17 ins. diam., bears S. 7½° E., 40 lks.  
dist., mkd. with an overgrown blaze

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins.  
in the ground, mound of stone to top, brass cap mkd.

AP835 | T10N  
FAIR | R17E  
S6  
1966

The angle point is 35 lks. W. of a N. and S. fence.

Angle point 836, monumented by a pine stump; verified  
by record course and dist. from the original bearing  
trees

A pine, 22 ins. diam., bears N. 11½° E., 81 lks.  
dist., mkd. with an overgrown blaze

A pine, 16 ins. diam., bears N. 65½° W., 39 lks.  
dist., mkd. with an overgrown blaze

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins.  
in the ground, mound of stone to top, brass cap mkd.

AP836 | T10N  
FAIR | R17E  
S1  
1966

The angle point is 4 lks. N. of a fence which bears  
N. 65° W., and S. 14° E.



BOOK 4819  
CERTIFICATE OF SURVEY

I, Wallace R. Ott, HEREBY CERTIFY upon honor that,  
in pursuance of special instructions bearing date of the 28th day of March, 19 66,  
I have remonumented a portion of the cadastral survey corners of the Fort  
Apache Indian Reservation Boundary in Township 10 North, Range 17 East,

of the Gila and Salt River Meridian, in the State of Arizona, which  
are represented in the foregoing field notes as having been executed by me and under my direction;  
and that said survey has been made in strict conformity with said special instructions, the Manual  
of Instructions for the Survey of the Public Lands of the United States, and in specific manner  
described in the foregoing field notes.

November 18, 1966  
(Date)

Wallace R. Ott  
(Cadastral Surveyor)  
(Supervisory Surveying Technician)

\_\_\_\_\_  
(Date)

\_\_\_\_\_  
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL  
Date MAY 26 1967

BUREAU OF LAND MANAGEMENT,  
Washington, D. C.

The foregoing field notes of the remonumentation of a portion of the cadastral survey  
corners of the Fort Apache Indian Reservation Boundary in Township 10 North,  
Range 17 East, Gila and Salt River Meridian, Arizona,

executed by Wallace R. Ott, Supervisory Surveying Technician,  
having been critically examined and found correct, are hereby approved.

FEB 27 1968  
(Date)

R. E. Brown  
(Chief, Division of Engineering)

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in  
, is a true copy of the original field notes.~~

~~\_\_\_\_\_  
(Date)~~

~~\_\_\_\_\_  
(Chief, Division of Engineering)~~