

Form 9180-6
(April 1965)
(formerly 4-679)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF THE SOUTH BOUNDARY

(FIRST STANDARD PARALLEL SOUTH)

THE

SOUTH 5 MILES OF THE WEST BOUNDARY

(WITH REESTABLISHMENT AND ESTABLISHMENT OF CERTAIN CORNERS

ALONG THE EAST BOUNDARY OF TOWNSHIP 5 SOUTH, RANGE 29 EAST)

THE

EAST 5 MILES OF THE NORTH BOUNDARY

(WITH REESTABLISHMENT OF CERTAIN CORNERS

ALONG THE SOUTH BOUNDARY OF TOWNSHIP 4 SOUTH, RANGE 30 EAST)

AND

PORTIONS OF THE SUBDIVISIONAL LINES

SURVEY

OF

SUBDIVISIONS IN SECTIONS

4, 7, 10, 19, 31, 33 and 34

TOWNSHIP 5 SOUTH, RANGE 30 EAST

Of the Gila and Salt River Meridian,
 In the State of Arizona

EXECUTED BY

Gary T. Oviatt Cadastral Surveyor


Under special instructions dated March 4, 19 68, which provided for the surveys
 included under Group Number 453, approved March 5, 1968,
 and assignment instructions dated March 4, 19 68.

Survey commenced March 8, 19 68
 Survey completed April 16, 19 68

1A

INDEX DIAGRAM

Township 5 South, Range 30 East
 17 18 20 21 22

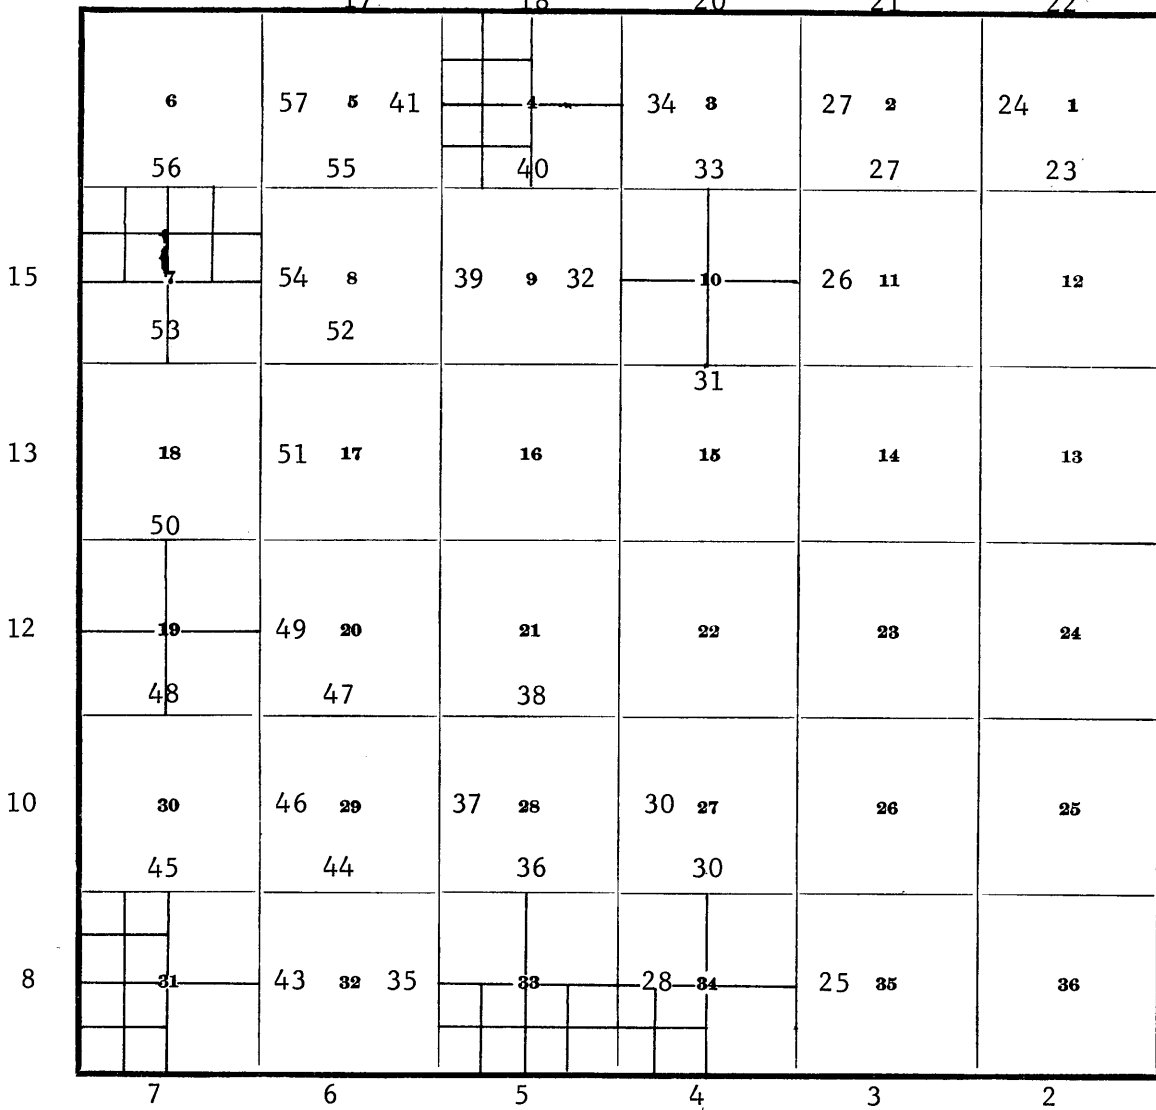

Subdivision of section 4 -- page 66
 " " " 7 -- page 74
 " " " 10 -- page 61
 " " " 19 -- page 73
 " " " 31 -- page 70
 " " " 33 -- page 63
 " " " 34 -- page 59

Township 5 South, Range 30 East
Gila and Salt River Meridian, Arizona

CHAINS

The south boundary (the First Standard Parallel South) was surveyed in 1882 by T. F. White and the east two miles was retraced in 1902 by J. Nash. The east boundary was surveyed in 1902 by J. Nash and resurveyed in 1921 by B. J. Kinsey. The west boundary was surveyed in 1882 by T. F. White; new corners were established for the east boundary of T. 5 S., R. 29 E., in 1914 by W. B. Kimmel. The west three miles of the north boundary was surveyed in 1882 by T. F. White. The east three miles were surveyed and the north boundary of secs. 4 and 5 were resurveyed in 1902 by J. Nash. The south boundary of sec. 33, T. 4 S., R. 30 E., was retraced in 1913 by W. B. Kimmel. The subdivisional lines were surveyed in 1902 by J. Nash.

The following notes are those of a dependent resurvey of the south boundary, (the First Standard Parallel South), the south 5 miles of the west boundary (with reestablishment and establishment of certain corners on the east boundary of Township 5 South, Range 29 East), the east 5 miles of the north boundary (with reestablishment of certain corners along the south boundary of Township 4 South, Range 30 East) and portions of the subdivisional lines, designed to restore the corners in their true original location according to the best available evidence and the survey of subdivisions in sections 4, 7, 10, 19, 31, 33 and 34, Township 5 South, Range 30 East, Gila and Salt River Meridian, Arizona.

This survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and the Special Instructions dated March 4, 1968.

Only the true line bearings and horizontal distances for the surveyed lines are given in these field notes. Unless described, each corner was monumented with a standard iron post 30 inches long, 2½ inches diameter, flanged at the base and with a brass cap riveted to the top.

The geographic position of the southeast corner of the township, as determined by traverse from U.S.C. & G.S. Triangulation Station SIDE, located in the south portion of section 35 is: Latitude; 32°56'50" North, Longitude; 109°12'10" West.

The mean magnetic declination was found to be 13° East.

Dependent Resurvey of the South Boundary
(the First Standard Parallel South)
Township 5 South, Range 30 East

Reestablishment of the Survey Executed
by T. F. White in 1882

Beginning at the Standard cor. of Tp. 5 S., Rs. 30 and 31 E., monumented by an iron post 3 ins. diam., projecting 15 ins. above the ground, in a collar of stone, mound of stone N., brass cap mkd.

S C
T5S R31E
R30E |
S36 | S31
1921

Dep. Res., South Boundary T. 5 S., R. 30 E.

CHAINS	
	N. 89°52' W., along the S. bdy. of sec. 36. Over rolling land, through moderate undergrowth.
15.90	Willow Creek, 50 lks. wide, 2 ft. deep, drains S. 10° W.
26.00	Fence cor., bears North, 7 lks. dist.; fences bear N. 25° E. and W.
31.20	Fence cor., bears North, 6½ lks. dist.; fences bear E., W. and N. 25° W.
34.90	Wash, 30 lks. wide, 3 ft. deep, drains S. 20° W.
40.04	The Stan. ¼ sec. cor. of sec. 36, monumented by a mound of stone. This is accepted as the best remaining evidence of the original cor. postion. At the corner point Set the iron post 20 ins. in the ground, brass cap mkd. <div style="text-align: center;"> <p>S C T5S R30E <u>¼ S36</u> 1968</p> </div> Raise a mound of stone N. of the cor. The cor. is located 10 lks. south of a fence bearing E. and W. <hr style="width: 20%; margin: auto;"/> N. 89°55' W., beginning new measurement. Over nearly level land.
7.90	Pipe line and maintenance road, bears S. and N. 20° W.
10.60	Wash, 10 lks. wide, 1 ft. deep, drains S. 15° W.
23.50	Wash, 15 lks. wide, 1 ft. deep, drains S.
29.90	Ridge, bears NE. and SW.
36.00	Wash, 30 lks. wide, 2 ft. deep, drains SW.
39.99	Point for the Standard cor. of secs. 35 and 36, at proportionate dist.; unable to find any remaining evidence of the original cor. Set the iron post over an "X" chiseled in solid rock mound of stone to top, brass cap mkd. <div style="text-align: center;"> <p>S C T5S R30E <u>S35 S36</u> 1968</p> </div> The cor. is located 14 lks. south of a fence bearing E. and W. Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, croeoste bush and bunch grass.

Dep. Res., South Boundary T. 5 S., R. 30 E.

CHAINS	
	N. 89°55' W., along S. bdy. of sec. 35. Over gently rolling land.
11.40	Wash, 30 lks. wide, 4 ft. deep, drains S. 80° W.
13.40	Confluence of washes, drains SW.
35.60	Track road, bears N. 40° E. and S. 40° W.
37.50	Fence cor., bears North 1 lk. dist.; fences bear N. and W.
39.99	The Stan. $\frac{1}{4}$ sec. cor. of sec. 35, monumented by a volcanic stone, 15x10x8 ins., set 8 ins. in the ground, mkd. $\frac{1}{4}$ on N. face and X on top. At the corner point Set the iron post 22 ins. in the ground, brass cap mkd. <div style="text-align: center;"> S C T5S R30E <u>$\frac{1}{4}$ S35</u> 1968 </div> from which U.S.C. & G.S. Triangulation Station SIDE, bears N. 83°11' E., 13.15 chs. dist., monumented by a brass tablet 3 ins. diam., set in a square concrete block, projecting 4 ins. above the ground, mkd. SIDE 1945. A Highway marker, bears West, 110 lks. dist., monumented by a brass tablet 2 ins. diam., set in a concrete block, mkd. STA Elev 3528.31. Bury the orig. cor. stone alongside the iron post. Raise a mound of stone N. of the cor. <hr style="width: 20%; margin: auto;"/> N. 89°50' W., beginning new measurement. Over gently rolling land, through moderate undergrowth.
1.15	Fence cor., bears North, 1 lk. dist.; fences bear E., S. 10 E. and W.
2.60	Fence cor., bears North 1 lk. dist.; fences bear E. and N.
4.20	Power line, bears NE. and SW.
4.20	Center of State Highway No. 75, bears S. 10° E. and N. 10° W.
5.70	Fence, bears S. 10° E. and N. 10° W.
8.30	Fence, bears N. 40° E. and S. 40° W.
10.40	Center of U. S. Highway No. 666, bears N. 40° E. and S. 40° W.
12.40	Fence, bears N. 40° E. and S. 40° W.

Dep. Res., South Boundary, T. 5 S., R. 30 E.

CHAINS	
14.70	Track road, bears N. 48° E. and S. 48° W.
31.10	Leave Wire Corral Mesa, enter broken land, bears NE and SW.
40.01	Point for the Stan. cor. of secs. 34 and 35, at proportionate dist.; unable to find any remaining evidence of the original cor.
	Set the iron post 8 ins. in the ground, mound of stone to top, brass cap mkd.
	S C T5S R30E <u>S34 S35</u> 1968
	Steep cliff, bears North, 50 lks. dist.
	Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, bunch grass.
	N. 89°50' W., along S. bdy. of sec. 34.
	Over rolling land, through moderate undergrowth.
6.00	Cold Creek, 30 lks. wide, 1 ft. deep, course S.
11.90	Old fence line, bears N. and S.
13.00	E. rim of mesa, bears N. and S., thence over gently rolling mesa top.
14.70	Graded road, bears N. 5° E. and S. 5° W.
17.30	W. rim of same mesa, bears N. and S.
21.10	Wash, 40 lks. wide, 1 ft. deep, drains irregularly S.
27.00	E. rim of mesa, bears N. and S., thence over gently rolling mesa top.
39.40	W. rim of same mesa, bears N. 25° E. and S. 25° W.
40.01	Point for the Stan. $\frac{1}{4}$ sec. cor. of sec. 34, at proportionate dist.; unable to find any remaining evidence of the original cor.
	Set the iron post 18 ins. in the ground, in a collar of stone, brass cap mkd.
	S C T5S R30E <u>$\frac{1}{4}$ S34</u> 1968
	from which
	A Soil Conservation marker, bears S. 68°29' W., 13.64 chs. dist., monumented by a brass cap, set in a cement block, mkd. G41.
48.30	Wash in bottom of Buzzard Roost Canyon, drains S. 20° E. from NE.

Dep. Res., South Boundary, T. 5 S., R. 30 E.

CHAINS	
53.60	SE. rim of mesa, bears NE. and SW., thence over gently rolling mesa top.
55.30	Graded road, bears N. 25° E. and S. 25° W.
58.30	NW. rim of same mesa, bears N. 25° E. and S. 25° W.
60.015	Point for the Stan. W 1/16 sec. cor. of sec. 34, at proportionate dist.; not monumented.
61.80	Graded road, bears N. 5° E. and S. 5° W.
66.00	Fence, bears SE. and NW.
67.00	Graded road, bears N. 40° E. and S. 40° W.
71.00	Track road, bears N. 15° E. and S. 15° W.
71.40	Southern Pacific Railroad, bears N. 15° E. and S. 15° W.
71.70	Telegraph line, bears N. 15° E and S. 15° W.; fence parallels line.
75.80	Present right bank of the Gila River, bears N. 22°30' E. and S. 22°30' W.
76.98	Point for the Stan. witness corner of secs. 33 and 34, at proportionate dist.; there is no remaining evidence of the original cor. This cor. was set originally in 1882 on right bank of the Gila River; not monumented.
77.00	Present left bank of the Gila River, bears N. 22°30' E. and S. 22°30' W.
78.30	Fence, bears N. and S.; leave dense undergrowth.
80.02	Point for the Stan. cor. of secs. 33 and 34, at proportionate dist.; unable to find any remaining evidence of the original cor.; not monumented.
	Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, scrub mesquite.
	N. 89°50' W., along S. bdy. of sec. 33.
	Over rolling land, through moderate undergrowth.
2.20	Power line, bears S. 20° E. and N. 20° W.
6.80	Old railroad bed, bears NE. and SW.
12.50	Fence, bears N. 71° E. and S. 71° W.
13.30	Fence cor., of fences, bearing S. 20° E. and N. 20° W.
20.005	Point for the Stan. E 1/16 sec. cor. of sec. 33, at proportionate dist.; not monumented.
38.10	Present left bank of the Gila River, bears N. 15°15' E. and S. 15°15' W.
40.01	Point for the Stan. 1/4 sec. cor. of sec. 33, at proportionate dist.; unable to find any remaining evidence of the original cor. Cor. point falls in the Gila River; not monumented.

Dep. Res., South Boundary, T. 5 S., R. 30 E.

CHAINS	
40.50	Present right bank of the Gila River, bears N. 15°30' E. and S. 15°30' W.
42.96	Point for the witness point on S. bdy. sec. 33, at proportionate dist.; there is no remaining evidence of the orig. cor. This cor. was set originally in 1882 on the left bank of the Gila River; not monumented.
44.75	Point for the witness point on S. bdy. sec. 33, at proportionate dist.; there is no remaining evidence of the orig. cor. This cor. was set in 1882 on right bank of Gila River; not monumented.
60.015	Point for the Stan. W 1/16 sec. cor. of sec. 33, at proportionate dist.; not monumented.
63.90	Wash, 30 lks. wide, 1 ft. deep, drains SW.
64.50	Wash, 50 lks. wide, 1 ft. deep, drains SE.
80.02	The Stan. cor. of secs. 32 and 33, monumented by an old weathered stake, set in a mound of stone. This is accepted as best remaining evidence of the original cor.
	At the corner point
	Set the iron post 20 ins. in the ground, brass cap mkd.
	S C T5S R30E <u>S32 S33</u> 1968
	Raise a mound of stone N. of the corner.
	Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, sage and bunch grass.
	N. 89°52' W., along the S. bdy. of sec. 32.
	Over rolling land, through moderate undergrowth.
14.80	Power line, bears S. 70° E. and N. 70° W.
28.40	Old railroad bed, bears N. 21° E. and S. 21° W.
40.04	Point for the Stan. ½ sec. cor. of sec. 32, at proportionate dist.; unable to find any remaining evidence of the original cor. This point falls in a wash in an unsafe position, impractical to monument; wash, 20 lks. wide, 1 ft. deep, drains S. 30° W.
42.00	Point selected for the witness Stan. ½ sec. cor. of sec. 32.
	Set the iron post 8 ins. in the ground, mound of stone to top, brass cap mkd.

Dep. Res., South Boundary, T. 5 S., R. 30 E.

CHAINS	
	<p>S C T5S R30E <u>½ S32 WC</u> 1968</p>
	<p>from which</p> <p style="padding-left: 40px;">The east end of an old railroad trestle, bears N. 53°47' E., 6.13 chs. dist.</p>
42.60	Track road, bears N. 20° E. and S. 20° W.
50.99	The witness point on the S. bdy. of sec. 32, monumented by a mound of stone, as described in the official record of survey in 1882. This point is located on high cliff over-looking Gila River on E. side; not remonumented.
57.80	Present right bank of the Gila River, bears N. 29°45' W. and S. 29°45' E.
59.70	Present left bank of the Gila River, bears N. 23°15' W. and S. 23°15' E.
63.50	East rim of mesa, bears S. 10° E. and N. 10° W.
72.20	Draw, drains N. 20° E.
80.08	The Stan. cor. of secs. 31 and 32, monumented by a volcanic stone, 12x8x4 ins., set 5 ins. in the ground, mkd. 5 notches on E. and 1 notch on the W. faces, mound of stone N.
	<p>At the corner point</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p>
	<p>S C T5S R30E <u>S31 S32</u> 1968</p>
	<p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone N. of the cor.</p> <p>Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>N. 89°55' W., along S. bdy. of sec. 31.</p> <p>Over rolling land, through moderate undergrowth.</p>
8.40	Wash, 30 lks. wide, 1 ft. deep, drains N. 30° E.
31.00	West rim of mesa, bears S. 10° E. and N. 10° W.
34.10	Wash, 80 lks. wide, 2 ft. deep, drains N. 30° W.
40.03	Point for the Stan. ½ sec. cor. of sec. 31, at proportionate dist.; unable to find any remaining evidence of the original cor. This point falls in an unsafe position, impractical to monument.
40.13	Point selected for the witness Stan. ½ sec. cor. of sec. 31.

Dep. Res., South Boundary, T. 5 S., R. 30 E.

CHAINS	
	<p>Set the iron post over an "X" chiseled on solid rock, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;"> S C T5S R30E $\frac{1}{4}$ S31 → C 1968 </p>
41.80	Wash, 90 lks. wide, 2 ft. deep, drains NE.
53.10	Fence, bears N. 65° E. and S. 65° W.
60.045	Point for the Stan. W 1/16 sec. cor. of sec. 31, at proportionate dist.; not monumented.
74.04	The original closing cor. of secs. 5 and 6, bears North, 5 lks. dist., monumented by a granite stone, 24x8x8 ins. firmly set in a mound of stone, mkd. 5 notches on S. face, 1 notch on N. face and CC on the W. face.
80.06	<p>The Stan. cor. of Tp. 5 S., Rs. 29 and 30 E., monumented by a wood stake, set in a mound of stone, no legible mks. This is accepted as the best remaining evidence of the original cor.</p> <p>At the corner point</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;"> S C T5S R29E R30E <u>S36 S31</u> 1968 </p> <p>Bury the wooden stake alongside the iron post.</p> <p>Raise a mound of stone N. of the cor.</p> <p>Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
<p>Dependent Resurvey, Portion W. Bdy., T. 5 S., R. 30 E., (the 5th Guide Meridian East) With Reestablishment and Establishment of Certain Corners Along the E. Bdy. of T. 5 S., R. 29 E.</p>	
<p>Reestablishment of the Survey Executed by T. F. White in 1882</p>	
	<p>From the Stan. cor. of Tps. 5 S., Rs. 29 and 30 E.</p> <p>N. 0°05' E., along the W. bdy. of sec. 31.</p>
15.90	Wash, 20 lks. wide, 3 ft. deep, drains N. 70° E.
20.04	Point for the S 1/16 sec. cor. of sec. 31, at proportionate dist.; not monumented.
29.00	Track road, bears NE. and SW.
38.50	Fence, bears N. 30° E. and S. 30° W.

Dependent Resurvey, Portion W. Bdy., T. 5 S., R. 30 E.

CHAINS	
40.08	Point for the $\frac{1}{4}$ sec. cor. of sec. 31, at proportionate dist.; unable to find any remaining evidence of the original cor. This cor. falls in the old Safford Highway in an unsafe position, bears N. 20° E. and S. 20° W.
40.38	Point selected for the witness $\frac{1}{4}$ sec. cor. of sec. 31. Set the iron post 18 ins. in the ground, in a collar of stone, brass cap mkd.
	<p style="text-align: center;">T5S R29E R30E $\frac{1}{4}$ S31 W C 1968</p>
	Raise a mound of stone E. of the cor.
42.30	Power line, bears N. 61° E. and S. 61° W.
48.70	Wash, 50 lks. wide, 1 ft. deep, drains N. 10° E.
60.12	Point for the N $\frac{1}{16}$ sec. cor. of sec. 31, at proportionate dist. Set the iron post 20 ins. in the ground, brass cap mkd.
	<p style="text-align: center;">T5S R29E R30E N $\frac{1}{16}$ S31 1968</p>
	Raise a mound of stone E. of the cor.
	Cor. is located on a point of a spur, sloping N.
67.30	Wash, 50 lks. wide, 1 ft. deep, drains N. 10° W.
72.23	True point for the closing cor. of secs. 25 and 36, T. 5SS., R. 29 E., from which its witness cor., bears West, 86 lks. dist., monumented by an iron post 2 ins. diam., projecting 13 ins. above the ground, mound of stone west, brass cap mkd.
	<p style="text-align: center;">T5S S30 S25 WC CC S36 S31 R29E R30E 1914</p>

Dependent Resurvey, Portion W. Bdy., T. 5 S., R. 30 E.

CHAINS											
77.65	Old Safford Highway, bears S. 75° E. and N. 75° W.										
80.16	The cor. of secs. 30 and 31, monumented by a volcanic stone, 13x9x5 ins., set 5 ins. in the ground, mkd. 1 notch on S. face, mound of stone E.										
	At the corner point										
	Set the iron post 24 ins. in the ground, brass cap mkd.										
	<table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2" style="text-align: center;">T5S</td></tr> <tr><td style="text-align: center;">R29E</td><td style="text-align: center;">R30E</td></tr> <tr><td style="text-align: center;">S25</td><td style="text-align: center;">S30</td></tr> <tr><td></td><td style="text-align: center;">S31</td></tr> <tr><td colspan="2" style="text-align: center;">1968</td></tr> </table>	T5S		R29E	R30E	S25	S30		S31	1968	
T5S											
R29E	R30E										
S25	S30										
	S31										
1968											
	Bury the orig. cor. stone alongside the iron post.										
	Raise a mound of stone E. of the cor.										
	Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, croeosote bush, cacti and bunch grass.										
	N. 0°06' E., along the W. bdy. of sec. 30.										
	Over rolling land, through moderate undergrowth.										
5.80	Track road, bears S. 85° E. and N. 85° W.										
7.70	S. edge of canyon overlooking Gila River, bears SE. and NW.; thence by Triangulation, across Gila River. Topography estimated.										
11.50	Center of the Gila River, course NW.										
16.70	N. edge of canyon over-looking Gila River, bears SE. and NW.; end of Triangulation.										
19.40	Track road, bears irregularly E. and W.										
26.10	Wash, 10 lks. wide, 1 ft. deep, drains S. 60° W.										
32.07	Point for the ¼ sec. cor. of sec. 25, T. 5 S., R. 29 E., at proportionate dist.										
	Set the iron post 20 ins. in the ground, brass cap mkd.										

Dep. Res., Portion West Boundary, T. 5 S., R. 30 E.

CHAINS		
	<p style="text-align: center;">T5S R29E R30E ½ S25 1968</p> <p>Raise a mound of stone W. of the cor.</p>	
40.03	<p>The ½ sec. cor. of sec. 30, monumented by an old mound of stone. This is accepted as best remaining evidence of the original cor.</p> <p>At the corner point</p> <p>Set the iron post 8 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T5S R29E R30E ½ S30 1968</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°06' E., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p>	
2.90	<p>Wash, 20 lks. wide, 1 ft. deep, drains irregularly W.</p>	
10.50	<p>Old Safford highway, bears N. 53° E. and S. 53° W.</p>	
19.90	<p>Wash, 40 lks. wide, 2 ft. deep, drains irregularly SW.</p>	
23.40	<p>Fence cor., fences bear North, and South 50° W.</p>	
32.03	<p>The closing cor. of secs. 24 and 25, T. 5 S., R. 29 E., monumented by an iron post, 2 ins. diam., projecting 8 ins. above the ground, mound of stone W., brass cap mkd.</p> <p style="text-align: center;">T5S S24 S19 CC S25 S30 R29E R30E 1914</p>	
34.70	<p>The cor. is located under a fence bearing N. and S.</p> <p>Wash, 30 lks. wide, ½ ft. deep, drains S. 10° W.</p>	
40.04	<p>The cor. of secs. 19 and 30, monumented by an old mound of stone. This is accepted as best remaining evidence of the original cor.</p> <p>At the corner point</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T5S R29E R30E S24 S19 S30 1968</p>	

Dep. Res., Portion West Boundary T. 5 S., R. 30 E.

CHAINS		
	<p>Raise a mound of stone E. of the cor.</p> <p>The cor. is located under a fence bearing N. and S.</p> <p>Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>	
<p>4.30</p> <p>13.60</p> <p>20.03</p>	<p>N. 0°02' E., along the W. bdy. of sec. 19.</p> <p>Over rolling land, through moderate undergrowth.</p> <p>Wash, 10 lks. wide, 4 ins. deep, drains SE.</p> <p>Graded road, bears irregularly NE. and W.; track road bears SW.</p> <p>Point for the S 1/16 sec. cor. of sec. 19, at proportionate dist.</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T5S R29E R30E S 1/16 S 19 1968</p> </div>	
<p>32.04</p>	<p>Raise a mound of stone E. of the cor.</p> <p>The cor. is located 1 lk. west of a fence bearing N. and S.</p> <p>Point for the 1/4 sec. cor. of sec. 24, T. 5 S., R. 29 E., at proportionate dist.</p> <p>Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>T5S R29E R30E 1/4 S24 1968</p> </div>	
<p>40.06</p>	<p>The cor. is located 1 lk. west of a fence bearing N. and S.</p> <p>Point for the 1/4 sec. cor. of sec. 19, at proportionate dist.; unable to find any remaining evidence of the original cor.</p> <p>Set the iron post 18 ins. in the ground, in a collar of stone, brass cap mkd.</p> <div style="text-align: center;"> <p>T5S R29E R30E 1/4 S19 1968</p> </div> <p>The cor. is located 1 lk. west of a fence bearing N. and S.</p>	

Dep. Res., Portion West Boundary, T. 5 S., R. 30 E.

CHAINS					
40.50	Old railroad bed, bears S. 56° E. and N. 56° W.				
58.10	Draw, drains S. 55° W.				
70.10	Draw, drains W.				
72.09	The closing cor. of secs. 13 and 24, T. 5 S., R. 29 E., monumented by an iron post 2 ins. diam., projecting 24 ins. above the ground, in a collar of stone, mound of stone W., brass cap mkd.				
	<p>T5S <table border="1" style="margin: auto;"> <tr><td>S13</td><td>S18</td></tr> <tr><td>S24</td><td>CC</td></tr> </table> R29E R30E 1914</p>	S13	S18	S24	CC
S13	S18				
S24	CC				
	The cor. is located 1 lk. west of a fence bearing N. and S.				
78.20	Wash, 10 lks. wide, ½ ft. deep, drains W.				
80.12	The cor. of secs. 18 and 19, monumented by a porphyry rock, 13x8x5 ins., set 6 ins. in the ground, mkd. 3 notches on N. and S. faces, mound of stone W.				
	At the corner point Set the iron post 10 ins. in the ground, mound of stone to top, brass cap mkd.				
	<p>T5S R29E R30E <table border="1" style="margin: auto;"> <tr><td>S13</td><td>S18</td></tr> <tr><td></td><td>S19</td></tr> </table> 1968</p>	S13	S18		S19
S13	S18				
	S19				
	Deposit the orig. cor. stone alongside the iron post.				
	The cor. is located under a fence bearing N. and S.				
	Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.				
	N. 0°03' E., along the W. bdy. of sec. 18.				
	Over rolling land, through moderate undergrowth.				
14.20	Wash, 50 lks. wide, 1 ft. deep, drains S. 20° W.				
27.50	Same wash, 50 lks. wide, 1 ft. deep, drains S. 30° E.				
32.02	Point for the ¼ sec. cor. of sec. 13, T. 5 S., R. 29 E., at proportionate dist.				
	Set the iron post 20 ins. in the ground, brass cap mkd.				
	<p>T5S R29E R30E <table border="1" style="margin: auto;"> <tr><td>¼</td><td>S13</td></tr> </table> 1968</p>	¼	S13		
¼	S13				

Dep. Res., Portion West Boundary, T. 5 S., R. 30 E.

CHAINS	
	<p>Raise a mound of stone W. of the cor.</p> <p>The cor. is located 1 lk. west of a fence bearing N. and S.</p>
34.70	<p>Telephone line, bears N. 62° E. and S. 62° W.</p>
40.16	<p>The ¼ sec. cor. of sec. 18, monumented by a volcanic stone, 11x10x6 ins. set 5 ins. in the ground, mkd. ¼ on W. face, mound of stone alongside.</p>
	<p>At the corner point</p> <p>Set the iron post 22 ins. the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T5S R29E R30E ¼ S18 1968</p> </div> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone E. of the cor.</p> <p>The cor. is located under a fence bearing N. and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°08' E., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p>
6.30	<p>Track road, bears irregularly E. and W.</p>
13.30	<p>Wash, 20 lks. wide, 1 ft. deep, drains N. 50° W.</p>
31.00	<p>Wash, 10 lks. wide, 2 ft. deep, drains W.</p>
31.90	<p>Point for the closing cor. of secs. 12 and 13, T. 5 S., R. 29 E., on the W. bdy. of the Tp.</p> <p>Set the iron post 15 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>T5S R29E R30E C S12 S18 C S13 1968</p> </div> <p>from which</p> <p>The closing cor. set in the 1914 survey, bears East, 7 lks. dist., monumented by an iron post 2 ins. diam., projecting 14 ins. above the ground, in a collar of stone. I mark this cor. to function as AM. Stamped AM in the NW quadrant and add date of 1968.</p> <p>The cor. is located 8½ lks. west of a fence bearing N. and S.</p>
38.40	<p>Fence cor., bears East, 15 lks. dist.; fences bear S. and N. 45° W.</p>

Dep. Res., Portion West Boundary, T. 5 S., R. 30 E.

CHAINS	
38.60	Fence, bears NW. and SE. 22 lks., thence S.
39.92	<p>The cor. of secs. 7 and 18, monumented by a mound of stone, with an iron bar 1 in. diam. and a squared 4x4 wooden post alongside. This is accepted as best remaining evidence of the original cor.</p> <p>At the corner point</p> <p>Set the iron post 8 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>T5S R29E R30E S12 S 7 S18 1968</p> </div> <p>Bury the iron bar alongside the iron post.</p> <p>Set the squared 4x4 wooden post alongside the cor.</p> <p>Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	N. 0°07' E., along the W. bdy. of sec. 7.
	Over rolling land, through moderate undergrowth.
14.80	Wash, 5 lks. wide, 10 ft. deep, drains W.
27.60	Spur, slopes W.
31.96	<p>Point for the 1/4 sec. cor. of sec. 12, T. 5 S., R. 29 E., at proportionate dist.</p> <p>Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>T5S R29E R30E 1/4 S12 1968</p> </div>
35.50	Wash, 50 lks. wide, 2 ft. deep, drains N. 80° W.
40.07	<p>The 1/4 sec. cor. of sec. 7, monumented by an old mound of stone. This is accepted as best remaining evidence of the original cor.</p> <p>At the corner point</p> <p>Set the iron post 8 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>T5S R29E R30E 1/4 S 7 1968</p> </div>

Dep. Res., Portion West Boundary, T. 5 S., R. 30 E.

CHAINS	
	<p>N. 0°07' E. beginning new measurement.</p>
	<p>Over rolling land, through moderate undergrowth.</p>
5.80	<p>Left bank of the San Francisco River, bears N. 60° E. and S. 60° W.</p>
7.40	<p>Right bank of the San Francisco River, bears N. 60° E. and S. 60° W.</p>
20.03	<p>Point for the N 1/16 sec. cor. of sec. 7, at proportionate dist.</p>
	<p>Set the iron post 24 ins. in the ground, brass cap mkd.</p>
	$\begin{array}{c} \text{T5S} \\ \text{R29E R30E} \\ \left \begin{array}{l} \text{N } 1/16 \\ \text{S } 7 \end{array} \right. \\ \text{1968} \end{array}$
	<p>Raise a mound of stone E. of the cor.</p>
31.80	<p>Fence cor., bears East, 5 lks. dist.; fences bear N. and W.</p>
31.88	<p>The closing cor. of secs. 1 and 12, T. 5 S., R. 29 E., monumented by an iron post 2 ins. diam., projecting 10 ins. above the ground, in a mound of stone, brass cap mkd.</p>
	$\begin{array}{c} \text{T5S} \\ \left \text{S } 6 \right. \\ \text{S } 1 \left \begin{array}{l} \text{S } 7 \\ \text{CC } 7 \end{array} \right. \\ \text{S12} \\ \text{R29E R30E} \\ \text{1914} \end{array}$
40.06	<p>The cor. of secs. 6 and 7, monumented by a granite stone, 18x8x8 ins., set 8 ins. in the ground, mkd. 5 notches on the S. and 1 notch on N. faces.</p>
	<p>At the corner point</p>
	<p>Set the iron post 6 ins. in the ground, mound of stone to top, brass cap mkd.</p>
	$\begin{array}{c} \text{T5S} \\ \text{R29E R30E} \\ \left \begin{array}{l} \text{S } 1 \text{ S } 6 \\ \text{S } 7 \end{array} \right. \\ \text{1968} \end{array}$
	<p>from which</p>
	<p>A fence cor., bears N. 40°36' E., 9 lks. dist.; fences bear E. and S.</p>
	<p>Deposit the orig. cor. stone alongside the iron post.</p>
	<p>Land, rolling.</p>
	<p>Soil, gravelly loam.</p>
	<p>Timber, none.</p>
	<p>Undergrowth, creosote bush, cacti and bunch grass.</p>

Dep. Res., Portion North Boundary, T. 5 S., R. 30 E.

CHAINS	<p>Dependent Resurvey of a Portion of the North Boundary Township 5 South, Range 30 East</p>
	<p style="text-align: center;">Reestablishment of the Survey Executed by J. Nash in 1902</p> <hr/> <p>The cor. of secs. 31 and 32, T. 4 S., R. 30 E., monu- mented by a quartzite stone, 15x8x4 ins., firmly set in a mound of stone, mkd. 5 notches on E. and 1 notch on W. faces.</p> <p>At the corner point</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T4S R30E <u>S31 S32</u> S 5 T5S 1968</p> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone N. of the cor.</p> <p>S. 89°41' E., along S. bdy. of sec. 32, T. 4 S., R. 30 E.</p> <p>Over rolling land, through moderate undergrowth.</p>
4.50	Spur, slopes N.
9.70	Spur, slopes N. 20° W.
18.60	Spur, slopes N.
19.40	Telephone line, bears N. 10° W. and S. 10° E.
33.90	Wash, 40 lks. wide, 1 ft. deep, drains N.
36.70	Spur, slopes N.
39.58	<p>The ¼ sec. cor. of sec. 32, T. 4 S., R. 30 E., monumented by a granite stone, 12x8x5 ins., set 6 ins. in the ground, mkd. ¼ on E. face, mound of stone alongside.</p> <p>At the corner point</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T4S R30E <u>¼ S32</u> T5S 1968</p> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone N. of the cor.</p> <hr/> <p>S. 89°43' E., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p>
5.00	Spur, slopes N.
7.00	Wash, 50 lks. wide, 2 ft. deep, drains NW.
17.00	Spur, slopes N. 10° W.

Dep. Res., Portion North Boundary, T. 5 S., R. 30 E.

CHAINS		
32.60	Spur, slopes N.	
37.00	Wash, 20 lks. wide, 2 ft. deep, drains N.	
39.48	<p>The cor. of secs. 32 and 33, T. 4 S., R. 30 E., monumented by a granite stone, 14x9x6 ins. set 7 ins. in the ground, mkd. 4 notches on E. and 2 notches on W. faces, mound of stone alongside.</p> <p>At the corner point</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T4S R30E</p> <p><u>S32 S33</u></p> <p>S 4</p> <p>T5S</p> <p>1968</p> </div> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone N. of the cor.</p> <p>The cor. is located on a N. slope.</p> <p>Land, rolling.</p> <p>Soil, gravelly loam.</p> <p>Timber, widely scattered juniper.</p> <p>Undergrowth, creosote, cacti and bunch grass.</p>	
	S. 89°57' E., along the S. bdy. of sec. 33, T. 4 S., R. 30 E.	
	Over rolling land, through moderate undergrowth.	
10.40	Wash, 20 lks. wide, 1 ft. deep, drains N. 20° W.	
13.00	Spur, slopes N. 20° W.	
15.00	Paved road to cemetery, bears irregularly SE. and NW.	
21.40	Wash in bottom of Ward Canyon, 50 lks. wide, 2 ft. deep, drains N. 70° W.	
36.40	Wash, 30 lks. wide, 2 ft. deep, drains S. 20° W.	
39.94	<p>The $\frac{1}{4}$ sec. cor. of sec. 33, T. 4 S., R. 30 E., monumented by a granite stone, 13x8x3 ins., firmly set in a mound of stone, mkd. $\frac{1}{4}$ on the W. face.</p> <p>At the corner point</p> <p>Set the iron post 6 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>T4S R30E</p> <p><u>$\frac{1}{4}$ S33</u></p> <p>T5S</p> <p>1968</p> </div>	

Dep. Res., Portion North Boundary, T. 5 S., R. 30 E.

CHAINS											
	<p>Deposit the orig. cor. stone alongside the iron post.</p> <p>Cor. is located on a NW. slope, 40 lks. South of a fence, bearing S. 89°25' E. and W.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89°44' E., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p> <p>12.00 Ridge, bears S. 75° E. and N. 75° W.</p> <p>39.20 Fence cor., fences bear N., S. 70° E. and W.</p> <p>39.99 The SE. cor. of sec. 33, T. 4 S., R. 30 E., monumented by a granite stone, 22x10x5 ins., set 12 ins. in the ground, mkd. 3 notches on W. face, mound of stone N.</p> <p>At the corner point</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr><td style="padding: 2px;">T4S</td><td style="border-left: 1px solid black; padding: 2px;"></td></tr> <tr><td style="padding: 2px;">R30E</td><td style="border-left: 1px solid black; padding: 2px;"></td></tr> <tr><td style="padding: 2px;">S33</td><td style="border-left: 1px solid black; padding: 2px;">S 3</td></tr> <tr><td style="padding: 2px;">T5S</td><td style="border-left: 1px solid black; padding: 2px;"></td></tr> <tr><td style="padding: 2px;">1968</td><td style="border-left: 1px solid black; padding: 2px;"></td></tr> </table> </div> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone NW. of the cor.</p> <p>Land, rolling. Soil, gravelly loam and rocky. Timber, widely scattered juniper. Undergrowth, creosote, cacti and bunch grass.</p>	T4S		R30E		S33	S 3	T5S		1968	
T4S											
R30E											
S33	S 3										
T5S											
1968											
<p>1.86</p>	<p>N. 0°03' W., along the E. bdy. of sec. 33, T. 4 S., R. 30 E.</p> <p>Asc. over rocky S. slope.</p> <p>The closing cor. of secs. 3 and 34, Tps. 4 and 5 S., R. 30 E., monumented by a granite stone, 24x9x8 ins., loosely set, mkd. 3 notches and CC on the E. face, mound of stone E.</p> <p>At the corner point</p> <p>Set the iron post 18 ins. in the ground, in a collar of stone, brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr><td style="padding: 2px;">T4S</td><td style="padding: 2px;">R30E</td></tr> <tr><td style="padding: 2px;">S33</td><td style="border-left: 1px solid black; padding: 2px;">C S34</td></tr> <tr><td></td><td style="border-left: 1px solid black; padding: 2px;">C S 3</td></tr> <tr><td></td><td style="border-left: 1px solid black; padding: 2px;">T5S</td></tr> <tr><td></td><td style="border-left: 1px solid black; padding: 2px;">1968</td></tr> </table> </div> <p>A transit line was run, N. 0°03' W. to the ¼ sec. cor. of secs. 33 and 34, T. 4 S., R. 30 E., for verification of alignment. The ¼ sec. cor. of secs. 33 and 34, monumented by an iron post 1 in. diam., set, mkd. and witnessed as described in the 1916 survey.</p>	T4S	R30E	S33	C S34		C S 3		T5S		1968
T4S	R30E										
S33	C S34										
	C S 3										
	T5S										
	1968										

Dep. Res., Portion North Boundary, T. 5 S., R. 30 E.

CHAINS	
	<p>Deposit the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone E. of the cor.</p>
	<p>From the closing cor. of secs. 3 and 34, Tps. 4 and 5 S., R. 30 E.</p> <p>East, bet. secs. 3 and 34.</p> <p>Over rolling land, through moderate undergrowth.</p>
2.00	Wash, 10 lks. wide, 1 ft. deep, drains S. 10° W.
15.40	Graded road, bears N. 51° E. and S. 51° W.
22.00	Ridge, bears N. 30° E. and S. 30° W.
38.00	Wash in bottom of Soapbox Canyon, 40 lks. wide, 2 ft. deep, drains S. 60° W.
39.53	<p>The ¼ sec. cor. of secs. 3 and 34, monumented by a granite stone, 20x10x8 ins., loosely set, dimly mkd., mound of stone W.</p> <p>At the corner point</p> <p>Set the iron post 16 ins. in the ground, mound of stone to top, brass cap, mkd.</p> <div style="text-align: center;"> <p>T4S R30E</p> <p>¼ <u>S34</u></p> <p>S 3</p> <p>T5S</p> <p>1968</p> </div> <p>Deposit the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone N. of the cor.</p> <p>Cor. is located 5 lks. North of a fence bearing N. 85° E. and S. 85° W.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89°51' E., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p>
0.56	Fence, bears East and S. 85° W.
14.00	High red ridge, bears N. and S.
40.14	<p>The cor. of secs. 2, 3, 34 and 35, monumented by a granite stone, 27x12x6 ins. set 15 ins. in the ground, mkd. 4 notches on W. and 2 notches on E. faces, mound of stone N.</p> <p>At the corner point</p> <p>Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>T4S R30E</p> <p><u>S34</u> <u>S35</u></p> <p>S 3 S 2</p> <p>T5S</p> <p>1968</p> </div>

Dep, Res., Portion North Boundary, T. 5 S., R. 30 E.

CHAINS	
	<p>Deposit the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone N. of the cor.</p> <p>The cor. is located 3 lks. North of an E. and W. fence.</p> <p>Land, rolling. Soil, rocky and gravelly loam. Timber, widely scattered juniper. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>S. 89°44' E., bet. secs. 2 and 35.</p> <p>Over rolling land, through moderate undergrowth.</p>
1.00	Wash, 15 lks. wide, ½ ft. deep, drains S.
4.20	Ridge, bears N. and S.
11.80	Wash, 10 lks. wide, 1 ft. deep, drains irregular S.
17.30	Wash, 30 lks. wide, 1 ft. deep, drains SW.
32.00	High ridge, bears N. 10° E. and S. 10° W.
39.98	<p>The ¼ sec. cor. of secs. 2 and 35, monumented by a volcanic rock, 9x6x4 ins. showing above the ground, mkd. ¼ S on the N. face, mound of stone N.; not remonumented.</p> <hr/> <p>S. 89°50' E., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p>
2.90	Wash, 10 lks. wide, 1 ft. deep, drains irregularly S.
8.00	Ridge, bears N. 10° E. and S. 10° W.
26.30	Wash, 50 lks. wide, 2 ft. deep, drains SW.
40.11	<p>The cor. of secs. 1, 2, 35 and 36, monumented by a limestone, 14x10x3 ins., set 5 ins. in the ground, mkd. 5 notches on W., and 1 notch on E. faces.</p> <p>At the corner point</p> <p>Set the iron post 14 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>T4S R30E</p> <p>S35 S36</p> <p>S 2 S 1</p> <p>T5S</p> <p>1968</p> </div> <p>from which</p> <p style="padding-left: 40px;">A fence cor., bears N. 51°20' E., 6 lks. dist.; fences bear N. and W.</p> <p>Deposit the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone N. of the cor.</p>

Dep. Res., Portion North Boundary, T. 5 S., R. 30 E.

CHAINS	
	<p>Land, rolling. Soil, rocky and gravelly loam. Timber, none. Undergrowth, sage, cacti and bunch grass.</p>
	<p>S. 89°42' E., bet. secs. 1 and 36.</p> <p>Over rolling land, through moderate undergrowth.</p>
20.60	Wash, 10 lks. wide, 1 ft. deep, drains S. 20° E.
33.50	Track road, bears N. 30° E. and S. 30° W.
39.00	Begin desc. into Rattlesnake Canyon.
40.19	<p>The ¼ sec. cor. of secs. 1 and 36, monumented by a volcanic rock, 18x10x5 ins. loosely set in a mound of stone, mkd. ¼ S on N. face.</p> <p>At the corner point</p> <p>Set the iron post 6 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>T4S R30E</p> <p>¼ <u>S36</u></p> <p>S 1</p> <p>T5S</p> <p>1968</p> </div> <p>Deposit the orig. cor. stone alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89°51' E., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p>
9.10	Wash, in bottom of Rattlesnake Canyon, drains S. 20° E.; asc. W. slope.
11.00	Small spur, slopes S. 30° E.; desc. E. slope.
13.30	Wash, in bottom of Rattlesnake Canyon, drains S. 30° W.; asc. W. slope.
31.00	E. rim of Rattlesnake Canyon, bears NE. and SW.
40.01	<p>The cor. of Tps. 4 and 5 S., Rs. 30 and 31 E., monumented by an iron post 3 ins. diam., projecting 10 ins. above ground, mound of stone N., brass cap mkd.</p> <div style="text-align: center;"> <p>T4S</p> <p>R30E R31E</p> <p><u>S36</u> <u>S31</u></p> <p>S 1 S 6</p> <p>T5S</p> <p>1916</p> </div> <p>Cor. is located under a fence bearing N. and S.</p> <p>Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, cat claw, cacti and bunch grass.</p>

Dep. Res., Portion Subdivisional Lines T. 5 S., R. 30 E.

CHAINS																					
	Dependent Resurvey of Portions of the Subdivisional Lines Township 5 South, Range 30 East																				
	Reestablishment of the Survey Executed by J. Nash in 1902																				
	<p>The cor. of secs. 1 and 12, on the E. bdy. of the Tp., monumented by an iron post 2 ins. diam., projecting 10 ins. above the ground, in a collar of stone, mound of stone W., brass cap mkd.</p> <div style="text-align: center;"> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>T5S</td> <td>T5S</td> </tr> <tr> <td></td> <td>R31E</td> </tr> <tr> <td>S 1</td> <td>S 6</td> </tr> <tr> <td>S12</td> <td></td> </tr> <tr> <td>R30E</td> <td></td> </tr> <tr> <td></td> <td>1921</td> </tr> </table> </div> <p>N. 89°59' W., bet. secs. 1 and 12.</p> <p>Over rolling land, through moderate undergrowth.</p> <p>8.20 Begin desc. SW. slope.</p> <p>12.80 Wash, 30 lks. wide, 1 ft. deep, drains S. 25° W.</p> <p>17.60 Spur, slopes S.</p> <p>21.00 Wash, 10 lks. wide, 1 ft. deep, drains irregularly S.</p> <p>27.70 SE. edge of low mesa, bears NE. and SW., thence over gently rolling mesa.</p> <p>37.40 Fence, bears N. 30° E. and S. 30° W.</p> <p>37.70 Graded road and W. edge of same low mesa, bears N. 30° E. and S. 30° W.</p> <p>40.22 The ¼ sec. cor. of secs. 1 and 12, monumented by a volcanic stone, 18x11x5 ins., set 9 ins. in the ground mkd. ¼ S on N. face, mound of stone N.</p> <p>At the corner point</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>T5S</td> <td>R30E</td> </tr> <tr> <td>¼ S 1</td> <td></td> </tr> <tr> <td>S12</td> <td></td> </tr> <tr> <td></td> <td>1968</td> </tr> </table> </div> <p>Bury the orig. cor. stone along side the iron post.</p> <p>Raise a mound of stone N. of the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89°43' W., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p> <p>17.40 Wash, in bottom of Rattlesnake Canyon, drains S. 30° W., asc. E. slope.</p> <p>35.70 Track road, bears N. 30° E., and S. 30° W.</p>	T5S	T5S		R31E	S 1	S 6	S12		R30E			1921	T5S	R30E	¼ S 1		S12			1968
T5S	T5S																				
	R31E																				
S 1	S 6																				
S12																					
R30E																					
	1921																				
T5S	R30E																				
¼ S 1																					
S12																					
	1968																				

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS

40.21

The cor. of secs. 1, 2, 11 and 12, monumented by a granite stone, 15x8x8 ins., set 8 ins. in the ground, mkd. 5 notches on S. and 1 notch on E. faces, mound of stone W.

At the corner point

Set the iron post 20 ins. in the ground, brass cap mkd.

T5S R30E
 $\frac{S\ 2}{S11} | \frac{S\ 1}{S12}$
 1968

Bury the orig. cor. stone alongside the iron post.

Raise a mound of stone W. of the cor.

The cor. is located on a W. slope.

Land, rolling.

Soil, gravelly loam.

Timber, scattered juniper.

Undergrowth, creosote bush, cacti and bunch grass.

N. 0°07' E., bet. secs. 1 and 2.

Over rolling land, through moderate undergrowth.

5.00

Wash, 30 lks. wide, 2 ft. deep, drains S. 30° W.

18.00

Ridge, bears N. 20° E. and S. 20° W.

40.50

The $\frac{1}{4}$ sec. cor. of secs. 1 and 2, monumented by a volcanic stone, 21x13x5 ins., set 10 ins. in the ground, mkd. $\frac{1}{4}$ S on the W. face, mound of stone W.

At the corner point

Set the iron post 22 ins. in the ground, brass cap mkd.

T5S R30E
 $\frac{1}{4}$
 $\frac{S\ 2}{S11} | \frac{S\ 1}{S12}$
 1968

Deposit the orig. cor. stone alongside the iron post.

Raise a mound of stone W. of the cor.

N. 0°05' E., beginning new measurement.

Over rolling land, through moderate undergrowth.

40.23

The cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the Tp.

Land, rolling.

Soil, rocky and gravelly loam.

Timber, scattered juniper.

Undergrowth, creosote bush, cacti and bunch grass.

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS									
	From the Standard cor. of secs. 34 and 35, on the S. bdy. of the Tp.								
	N. 0°54' E., bet. secs. 34 and 35.								
	Over rolling land, through moderate undergrowth.								
.50	S. face of steep cliff, bears N. 80° E. and S. 80° W.								
1.80	Top of ridge, bears N. 80° E. and S. 80° W.; desc. N. slope.								
6.00	Enter wash area, drains S. 75° W.								
9.70	Center of Cold Creek, drains S. 75° W.								
12.50	Leave wash area, drains S. 75° W.; asc. S. slope.								
16.60	Ridge, bears N. 75° E. and S. 75° W., enter mesa, bears N. 65° E. and S. 65° W.								
18.30	Graded road, bears N. 65° E. and S. 65° W.								
22.30	Wash, 30 lks. wide, 1 ft. deep, drains irregularly SW.								
35.60	Wash, 20 lks. wide, 1 ft. deep, drains irregularly E.								
41.98	The $\frac{1}{4}$ sec. cor. of secs. 34 and 35, monumented by a granite stone, 12x8x5 ins., set in a mound of stone, mkd. $\frac{1}{4}$ on W. face. Rebuild the mound of stone and mark an "X" on top of the orig. cor., not remonumented.								

	N. 1°52' W., beginning new measurement.								
	Over rolling land, through moderate undergrowth.								
12.60	Wash, 20 lks. wide, 1 ft. deep, drains irregularly S.								
37.92	The cor. of secs. 26, 27, 34 and 35, monumented by a volcanic stone, 20x10x4 ins., set 10 ins. in the ground, mkd. 2 notches on E. and 1 notch on S. faces, mound of stone W.								
	At the corner point								
	Set the iron post 20 ins. in the ground, brass cap mkd.								
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td colspan="2">T5S R30E</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S27</td> <td style="padding: 0 5px;">S26</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S34</td> <td style="padding: 0 5px;">S35</td> </tr> <tr> <td colspan="2" style="text-align: center;">1968</td> </tr> </table>	T5S R30E		S27	S26	S34	S35	1968	
T5S R30E									
S27	S26								
S34	S35								
1968									
	Deposit the orig. cor. stone alongside the iron post.								
	Raise a mound of stone W. of the cor.								
	Land, rolling.								
	Soil, gravelly loam.								
	Timber, none..								
	Undergrowth, creosote bush, cacti and bunch grass.								
	The cor. of secs. 10, 11, 14 and 15, monumented by a volcanic stone, 18x9x6 ins., firmly set in a mound of stone, mkd. 4 notches on S. and 2 notches on E. faces.								

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS						
	<p>At the corner point</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T5S R30E</p> <table border="1" style="margin: auto;"> <tr> <td>S10</td> <td>S11</td> </tr> <tr> <td>S15</td> <td>S14</td> </tr> </table> <p>1968</p> </div> <p>from which</p> <p style="padding-left: 40px;">A fence cor., bears S. 45° E., 10 lks. dist.; fences bear N. and W.</p> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone W. of the cor.</p> <p>N. 0°07' E., bet. secs. 10 and 11.</p> <p>Over gently rolling land, through moderate undergrowth.</p> <p>Along the W. side of a N. and S. fence.</p>	S10	S11	S15	S14	
S10	S11					
S15	S14					
20.60	Fence cor., bears East, 7 lks. dist.; fences bear S. and W.					
21.40	Graded road, bears N. 85° E. and S. 85° W.					
22.10	Fence, bears N. 85° E. and S. 85° W.					
23.20	Power line, bears S. 65° E. and N. 65° W.					
28.50	Wash, 30 lks. wide, 2 ft. deep, drains W.					
35.80	Track road, bears S. 80° E. and N. 80° W.					
40.25	<p>Point for the ¼ sec. cor. of secs. 10 and 11, at proportionate dist.; unable to find any remaining evidence of the original cor.</p> <p>Set the iron post 14 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>T5S R30E</p> <p>¼</p> <table border="1" style="margin: auto;"> <tr> <td>S10</td> <td>S11</td> </tr> </table> <p>1968</p> </div>	S10	S11			
S10	S11					
42.50	Wash, 20 lks. wide, 1 ft. deep, drains W.					
42.50	Television cable, bears SE. and NW.					
43.70	SW. portion of a (dry) stock tank.					
58.00	Ridge, bears NE. and SW.					
63.00	Wash, 40 lks. wide, 2 ft. deep, drains irregularly W.					
74.60	Spur, slopes SW.					
80.50	<p>The cor. of secs. 2, 3, 10 and 11, monumented by a granite stone, 22x12x6 ins., set 12 ins. in the ground mkd. 5 notches on S. and 2 notches on E. faces, mound of stone W.</p> <p>At the corner point</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p>					

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS	
	T5S R30E <u>S 3 S 2</u> S10 S11 1968
	Deposit the orig. cor. stone alongside the iron post. Raise a mound of stone W. of the cor. Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.
	From the cor. of secs. 1, 2, 11 and 12. N. 89°43' W., bet. secs. 2 and 11. Over rolling land, through moderate undergrowth.
3.70	Wash, 30 lks. wide, 2 ft. deep, drains irregularly SW.
9.40	Spur, slopes S.
18.40	Ridge, bears S. 10° E. and N. 10° W.
29.60	Wash, 20 lks. wide, 1 ft. deep, drains S.
33.90	Spur, slopes S. 80° E.
40.39	The ¼ sec. cor. of secs. 2 and 11, monumented by a lava stone, 8x8x6 ins. showing above the ground, mkd. ¼ S on N. face, mound of stone N.; not remonumented.

	N. 89°46' W., beginning new measurement. Over rolling land, through moderate undergrowth.
5.80	Ridge, bears N. 30° E. and S. 30° W.
26.30	Wash, 50 lks. wide, 3 ft. deep, drains S. 30° W.
34.80	Ridge, bears N. 10° E. and S. 10° W.
39.97	The cor. of secs. 2, 3, 10 and 11. Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.
	N. 0°09' E., bet. secs. 2 and 3. Over rolling land, through moderate undergrowth.
9.30	Wash, 20 lks. wide, 1 ft. deep, drains S. 20° W.
38.00	Draw, drains SE.
40.32	The ¼ sec. cor. of secs. 2 and 3, monumented by a sandstone, 20x8x8 ins., firmly set in a mound of stone, mkd. ¼ S on W. face.

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS	
	<p>At the corner point</p> <p>Set the iron post 10 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T5S R30E S 3^{1/2} S 2 1968</p> <p>Deposit the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone W. of the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°23' E., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p>
4.50	Spur slopes S. 10° W.
12.00	Draw, drains E.
33.60	Draw, drains E.
40.35	<p>The cor. of secs. 2, 3, 34 and 35 on the N. bdy. of the Tp.</p> <p>Land, rolling. Soil, rocky and gravelly loam. Timber, widely scattered juniper. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>From the point for the Standard cor. of secs. 33 and 34, on the S. bdy. of the Tp.</p> <p>N. 1°10' W., bet. secs. 33 and 34.</p> <p>Over nearly level river area, through moderate undergrowth.</p> <p>By triangulation, topography as scaled from USGS quadrangle sheet, Duncan #2 NE., Arizona.</p>
18.00	Present left bank of the Gila River, bears E. and W.
19.50	Center of Gila River, course W.
20.42	Point for the S 1/16 sec. cor. of secs. 33 and 34, at proportionate dist., falls in the Gila River, not monumented.
21.00	Present right bank of the Gila River, bears E. and W.; asc. S. slope.
21.42	<p>Point selected for the witness S 1/16 sec. cor. of secs. 33 and 34., end of triangulation.</p> <p>Set the iron post 18 ins. in the ground, in a collar of stone, brass cap mkd.</p> <p style="text-align: center;">T5S R30E S1/16 S33 S34 W C 1968</p>

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS	
	The cor. is located under a telegraph line, bears E. and W., continue triangulation.
21.80	Southern Pacific Railroad Track, bears E. and W.
22.00	Asc. a perpendicular cliff.
22.50	Top of cliff, a spur, slopes S. 30° W.; end of triangulation, thence over rolling land.
40.84	The 1/4 sec. cor. of secs. 33 and 34, monumented by a lava stone, 18x12x6 ins., loosely set, mkd. 1/4 S on W. face.
	At the corner point
	Set the iron post over an "X" chiseled on solid rock, mound of stone to top, brass cap mkd.
	T5S R30E 1/4 S33 S34 1968
	Deposit the orig. cor. stone alongside the iron post.
	N. 0°25' W., beginning new measurement.
	Over rolling land, through moderate undergrowth.
12.30	Wash, 30 lks. wide, 2 ft. deep, drains irregularly S.
19.79	Point for the N 1/16 sec. cor. of secs. 33 and 34, at proportionate dist.
	Set the iron post 6 ins. in the ground, mound of stone to top, brass cap mkd.
	T5S R30E N1/16 S33 S34 1968
26.40	Fence cor., fences bears N. and S. 10° E.; thence along N. and S. fence.
39.58	The cor. of secs. 27, 28, 33 and 34, monumented by a granite stone, 10x8x8 ins., firmly set in a mound of stone, mkd. 3 notches on E. and 1 notch on S. faces.
	At the corner point
	Set the iron post 20 ins. in the ground, brass cap mkd.
	T5S R30E S28 S27 S33 S34 1968
	Bury the orig. cor. stone alongside the iron post.
	Raise a mound of stone W. of the cor.
	Cor. is located under a fence bearing N. and S.

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS	<p>Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, willow and bunch grass.</p>
	<p>From the cor. of secs. 26, 27, 34 and 35. S. 89°33' W., bet. secs. 27 and 34. Over rolling land, through moderate undergrowth.</p>
1.60	W. rim of mesa, bears N. 20° E. and S. 20° W.; desc. W. slope.
4.10	Enter wash in bottom of Buzzard Roost Canyon, drains S. 20° W.
7.80	Leave wash area, drains S. 20° W.
12.70	E. rim of mesa, bears N. 20° E. and S. 20° W.
24.50	Graded road, bears N. 27° E. and S. 27° W.
28.80	W. rim of mesa, bears N. 30° E. and S. 30° W.; desc. W. slope.
40.62	<p>The ¼ sec. cor. of secs. 27 and 34, monumented by a sandstone, 18x17x9 ins., loosely set, mkd. ¼ on N. face, scattered mound of stone N., Rebuild a mound of stone around the cor. and mark an "X" on top of original cor.</p> <hr/> <p>N. 88°29' W., beginning new measurement. Over rolling land, through moderate undergrowth.</p>
3.20	Wash, in bottom of Rattlesnake Canyon, 50 lks. wide, 2 ft. deep, drains irregularly S.
10.80	Spur, slopes S. 20° E.
13.70	Wash, 30 lks. wide, 1 ft. deep, drains irregularly S.; asc. steep E. slope.
20.50	Ridge, bears N. and S.
26.20	Begin desc. W. slope.
33.00	Wash, 40 lks. wide, 2 ft. deep, drains SW.
39.93	<p>The cor. of secs. 27, 28, 33 and 34. Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>N. 0°26' W., bet. secs. 27 and 28. Over rolling land, through moderate undergrowth.</p>
11.20	Wash, 20 lks. wide, 1 ft. deep, drains S. 50° E.
20.08	<p>Point for the S 1/16 sec. cor. of secs. 27 and 28, at proportionate dist. Set the iron post 20 ins. in the ground, brass cap mkd.</p>

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS	
<p>33.60</p> <p>40.16</p>	<p style="text-align: center;">T5S R30E S1/16 S28 S27 1968</p> <p>Cor. is located under a fence bearing N. and S.</p> <p>Wash, 10 lks. wide, ½ ft. deep, drains W.</p> <p>The ¼ sec. cor. of secs. 27 and 28, monumented by a granite stone, 16x8x8 ins., set 10 ins. in the ground, mkd. ½ S on W. face, mound of stone W.</p> <p>At the corner point</p> <p>Set the iron post 18 ins. in the ground, in a collar of stone, brass cap mkd.</p>
<p>2.90</p> <p>40.11</p>	<p style="text-align: center;">T5S R30E ½ S28 S27 1968</p> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone W. of the cor.</p> <p>Cor. is located under a fence bearing N. and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°09' E., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p> <p>Wash, 10 lks. wide, 1 ft. deep, drains S. 80° W.</p> <p>The cor. of secs. 21, 22, 27 and 28, monumented by a granite stone, 18x10x3 ins., set 10 ins. in the ground, mkd. 3 notches on E. and 2 notches on S. faces, mound of stone W.</p> <p>At the corner point</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p>
<p>31.70</p>	<p style="text-align: center;">T5S R30E S21 S22 S28 S27 1968</p> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone W. of the cor.</p> <p>Cor. is located 3 lks. West of a fence bearing N. and S.</p> <p>Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p> <hr/> <p>From the cor. of secs. 10, 11, 14 and 15.</p> <p>N. 89°24' W., bet. secs. 10 and 15.</p> <p>Over nearly level mesa top, along E. and W. fence.</p> <p>Bend of fence, bears South 8 lks. dist., fences bear E. and S. 70° W., leave mesa, desc. W. slope.</p>

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS	
36.70	Wash, 40 lks. wide, 2 ft. deep, drains S. 80° W.
40.22	Point for the ½ sec. cor. of secs. 10 and 15, at proportionate dist.; unable to find any remaining evidence of the original cor.
	Set the iron post 18 ins. in the ground, in a collar of stone, brass cap mkd.
	<p>T5S R30E $\frac{1}{4}$ <u>S10</u> S15 1968</p>
	Cor. is located at the base of the SE. end of a man-made dyke, bearing E and W.
47.40	Base of the SW. end of man made dyke, bearing E. and W.
58.20	Ridge, bears N. and S.; desc. W. slope.
68.40	Wash, in bottom of Soapbox Canyon, 300 lks. wide, 3 ft. deep, drains S.; asc. E. slope.
80.44	The cor. of secs. 9, 10, 15 and 16, monumented by a granite stone, 8x7x6 ins. showing above the ground, mkd. 3 notches on E. and 4 notches on S. faces, R30E on NW. and T5S on SE. edges. Cor. is set in a collar of stone.; not remonumented.
	Cor. is located 6 lks. North of a fence bearing E. and W.
	<p>Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	N. 0°23' E., bet. secs. 9 and 10.
	Over rolling land, through moderate undergrowth.
0.70	Ridge, bears S. 80° E. and N. 80° W.
11.60	Wash, 20 lks. wide, 1 ft. deep, drains S. 70° E.
38.70	Spur, slopes E.
40.21	The ½ sec. cor. of secs. 9 and 10, monumented by a volcanic stone, 19x10x8 ins., firmly set in a mound of stone, mkd. ½ S on W. face; not remonumented.
	<hr/> <p>N. 0°15' W., beginning new measurement.</p>
	Over rolling land, through moderate undergrowth.
2.90	Wash, 10 lks. wide, 1 ft. deep, drains SE.
15.10	Wash, 10 lks. wide, 1 ft. deep, drains S. 60° E.
35.40	Spur, slopes E.
38.50	Spur, slopes E.

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS									
39.98	<p>The cor. of secs. 3, 4, 9 and 10, at proportionate dist.; unable to find any remaining evidence of the original cor.</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>T5S</td> <td>R30E</td> </tr> <tr> <td>S 4</td> <td>S 3</td> </tr> <tr> <td>S 9</td> <td>S10</td> </tr> <tr> <td colspan="2" style="text-align: center;">1968</td> </tr> </table> <p>Raise a mound of stone W. of the cor.</p> <p>Cor. is located at the head of a small draw, draining E. Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>	T5S	R30E	S 4	S 3	S 9	S10	1968	
T5S	R30E								
S 4	S 3								
S 9	S10								
1968									
<p>1.00</p> <p>26.10</p> <p>32.10</p> <p>38.40</p> <p>40.34</p>	<p>From the cor. of secs. 2, 3, 10 and 11.</p> <p>N. 89°34' W., bet. secs. 3 and 10.</p> <p>Over rolling land, through moderate undergrowth.</p> <p>Wash, 40 lks. wide, 1 ft. deep, drains S.</p> <p>Wash, 20 lks. wide, 1 ft. deep, drains S.</p> <p>Track road, bears N. 30° E. and S. 30° W.</p> <p>Draw, drains S. 10° W.</p> <p>The ¼ sec. cor. of secs. 3 and 10, monumented by a granite stone, 14x8x4 ins., set in a mound of stone, mkd. ¼ S on N. face.</p> <p>At the corner point</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>T5S</td> <td>R30E</td> </tr> <tr> <td>¼ S 3</td> <td></td> </tr> <tr> <td>S10</td> <td></td> </tr> <tr> <td colspan="2" style="text-align: center;">1968</td> </tr> </table> <p>from which</p> <p style="padding-left: 40px;">A windmill, bears N. 62°07' W., 8.83 chs. dist.</p> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone N. of the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89°40' W., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p> <p>Television cable, bears S. 60° E. and N. 60° W.</p> <p>Fence, bears S. 50° E. and N. 50° W.</p>	T5S	R30E	¼ S 3		S10		1968	
T5S	R30E								
¼ S 3									
S10									
1968									

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS	
13.50	Soapbox Canyon, drains SW., approximately 2.00 chs., thence SE.
14.40	Graded road, bears S. 50° E. and N. 50° W.
27.80	Wash, 10 lks. wide, 1 ft. deep, drains SE.; asc. E. slope.
38.20	Draw, drains SE.
40.26	The cor. of secs. 3, 4, 9 and 10.
	Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.
	N. 0°11' E., bet. secs. 3 and 4.
	Over rolling land, through moderate undergrowth.
1.50	Spur, slopes SE.
8.00	Ridge, bears E. and W.; desc. N. slope.
19.20	Graded road, bears S. 62° E. and N. 62° W.
20.50	Fence line, bears S. 60° E. and N. 60° W.
20.90	Television cable, bears S. 55° E. and N. 55° W.
21.70	Track road, bears S. 60° E. and N. 60° W.
35.00	Spur, slopes SE.
39.98	The ¼ sec. cor. of secs. 3 and 4, monumented by a granite stone, 18x9x6 ins., set 10 ins. in the ground, mkd. ¼ S on W. face, mound of stone W.
	At the corner point
	Set the iron post 20 ins. in the ground, brass cap mkd.
	T5S R30E ¼ S 4 S 3 1968
	from which
	A fence cor., bears N. 70° W., 198 lks. dist.; fences bear N. and S. 35° W.
	Bury the orig. cor. stone alongside the iron post.
	Raise a mound of stone W. of the cor.
	<hr style="width: 20%; margin: auto;"/> N. 0°36' E., beginning new measurement.
	Over rolling land, through moderate undergrowth.
16.80	Fence, bears N. 15° E. and S. 15° W.

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS					
18.00	Graded road, bears N. 15° E. and S. 15° W.				
21.00	Track road, bears E. and W.				
34.50	Spur, slopes W.				
37.00	Wash, 10 lks. wide, 1 ft. deep, drains W.				
38.29	Intersect the N. bdy. of the Tp.				
	Point for the closing cor. of secs. 3 and 4.				
	Set the iron post 6 ins. in the ground, mound of stone to top, brass cap mkd.				
	<div style="text-align: center;"> <p>T4S S33</p> <table border="1" style="margin: auto;"> <tr> <td>S 4</td> <td>S 3</td> </tr> <tr> <td>C</td> <td>C</td> </tr> </table> <p>T5S R30E 1968</p> </div>	S 4	S 3	C	C
S 4	S 3				
C	C				
	from which				
	<p>The original closing cor. of secs. 3 and 4 bears N. 0°36' E., 4 lks. dist., monumented by a granite stone, 18x12x8 ins., set in a mound of stone mkd. 3 notches on E. and W. faces and CC on S. face. Remarkd this cor. to function as AM.</p>				
	<p>The SE. cor. of sec. 33 T. 4 S., R. 30 E., bears S. 89°44' E. 76 lks. dist.</p>				
	<p>Fence cor., bears N. 73°18' W., 10 lks. dist.; fences bear N., S. 70° E. and W.</p>				
	<p>Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>				
	<p>From the Standard cor. of secs. 32 and 33, on the S. bdy. of the Tp.</p>				
	<p>N. 0°45' W., bet. secs. 32 and 33.</p>				
	<p>Over rolling land, through moderate undergrowth.</p>				
10.70	Wash, 10 lks. wide, 1 ft. deep, drains SE.				
19.99	Point for the S 1/16 sec. cor. of secs. 32 and 33, at proportionate dist.				
	Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.				
	<div style="text-align: center;"> <p>T5S R30E S1/16 S32 S33 1968</p> </div>				
20.70	Wash, 5 lks. wide, ½ ft. deep, drains SE.				
27.80	Ridge, bears SE. and NW.				

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS	
39.98	<p>The $\frac{1}{4}$ sec. cor. of secs. 32 and 33, monumented by a sandstone, 12x10x6 ins., set in a collar of stone, mkd. $\frac{1}{4}$ on W. face.</p> <p>At the corner point</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T5S R30E $\frac{1}{4}$ S32 S33 1968</p> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone W. of the cor.</p> <hr style="width: 20%; margin: 10px auto;"/>
2.00	Telegraph line, bears SE. and NW.
2.90	Southern Pacific Railroad, bears SE. and NW.
17.00	Draw, drains SW.
19.955	<p>Point for the N $\frac{1}{16}$ sec. cor. of secs. 32 and 33, at proportionate dist.</p> <p>Set the iron post 8 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T5S R30E N1/16 S32 S33 1968</p>
37.30	Wash, 30 lks. wide, 1 ft. deep, drains S. 70° W.
39.91	<p>The cor. of secs. 28, 29, 32 and 33, monumented by an old wooden stake, set in a mound of stone. This is accepted as best remaining evidence of the original cor.</p> <p>At the corner point</p> <p>Set the iron post 8 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T5S R30E <u>S29 S28</u> S32 S33 1968</p> <p>Bury the wooden stake alongside the iron post.</p> <p>Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>From the cor. of secs. 27, 28, 33 and 34.</p> <p>N. 89°43' W., bet. secs. 28 and 33.</p>

Dep. Resurvey, Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS	
	Over rolling land, through moderate undergrowth.
15.50	Wash, 20 lks. wide, ½ ft. deep, drains SW.
21.40	Wash, 40 lks. wide, 1 ft. deep, drains S.
32.40	Wash, 50 lks. wide, 1 ft. deep, drains irregularly S.
40.17	The ¼ sec. cor. of secs. 28 and 33, monumented by a granite stone, 18x10x10 ins., set 9 ins. in the ground mkd. ¼ S on N. face, mound of stone N.
	At the corner point
	Set the iron post 15 ins. in the ground, mound of stone to top, brass cap mkd.
	T5S R30E S28 $\frac{1}{4}$ S33 1968
	Deposit the orig. cor. stone alongside the iron post.

	S. 89°19' W., beginning new measurement.
	Over rolling land, through moderate undergrowth.
1.40	Wash, 20 lks. wide, 1 ft. deep, drains S.
12.20	Wash, 30 lks. wide, 1 ft. deep, drains irregularly S.
37.00	Wash, 20 lks. wide, 1 ft. deep, drains SW.
39.34	The cor. of secs. 28, 29, 32 and 33.
	Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.
	N. 1°07' W., bet. secs. 28 and 29.
	Over rolling land, through moderate undergrowth.
11.00	Wash, 30 lks. wide, 1 ft. deep, drains N. 80° W.
20.23	Point for the S 1/16 sec. cor. of secs. 28 and 29, at proportionate dist.
	Set the iron post 20 ins. in the ground, brass cap mkd.
	T5S R30E S1/16 S29 S28 1968
	Raise a mound of stone W. of the cor.
32.70	Ridge, bears E. and W.
40.46	Point for the ¼ sec. cor. of secs. 28 and 29, at proportionate dist.
	Set the iron post 18 ins. in the ground in a collar of stone, brass cap mkd.

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS	
	<p>T5S R30E $\frac{1}{4}$ S29 S28 1968</p>
	<p>Raise a mound of stone W. of the cor.</p>
49.57	<p>The witness $\frac{1}{4}$ sec. cor. of secs. 28 and 29, monumented by a granite stone, 24x14x8 ins., loosely set, mkd. WC $\frac{1}{4}$ on W. face, mound of stone W. Reset the orig. cor. 10 ins. in the ground, build mound of stone W. and mark an "X" on top.</p>
	<hr style="width: 20%; margin: 0 auto;"/>
	<p>N. 0°20' E., beginning new measurement.</p>
	<p>Over rolling land, through moderate undergrowth.</p>
5.20	<p>Ridge, bears N. 60° E. and S. 60° W.</p>
8.60	<p>Southern Pacific Railroad, bears N. 47° E. and S. 47° W.</p>
9.60	<p>Telegraph line, bears N. 47° E. and S. 47° W.</p>
10.80	<p>Wash, 40 lks. wide, 2 ft. deep, drains S. 50° W.</p>
11.60	<p>Track road, on a curve, bears S. 50° W. and NW.</p>
16.70	<p>Same road, bears SE. and NW.</p>
26.60	<p>Track road, bears SE. and NW.</p>
31.14	<p>The cor. of secs. 20, 21, 28 and 29, monumented by a granite stone, 18x10x10 ins., loosely set, mkd. 4 notches on E. and 2 notches on S. faces, old mound of stone W.</p>
	<p>At the corner point</p>
	<p>Set the iron post 18 ins. in the ground, in a collar of stone, brass cap mkd.</p>
	<p>T5S R30E S20 S21 S29 S28 1968</p>
	<p>Deposit the orig. cor. stone alongside the iron post.</p>
	<p>Raise a mound of stone W. of the cor.</p>
	<p>Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>From the cor. of secs. 21, 22, 27 and 28.</p>
	<p>N. 89°53' W., bet. secs. 21 and 28.</p>
	<p>Over rolling land, through moderate undergrowth.</p>
3.60	<p>Wash, 10 lks. wide, $\frac{1}{2}$ ft. deep, drains S. 80° W.</p>
5.90	<p>Wash, 40 lks. wide, 1 ft. deep, drains S. 10° W.</p>

Dep. Res., Portion Subdivisional lines, T. 5 S., R. 30 E.

CHAINS	
20.70	Wash, 15 lks. wide, 2 ft. deep, drains S. 30° E.
37.00	Ridge, bears NE. and SW.
40.06	Point for the ¼ sec. cor. of secs. 21 and 28, at proportionate dist.; unable to find any remaining evidence of the original cor. Set the iron post 8 ins. in the ground, mound of stone to top, brass cap mkd. T5S R30E ¼ $\frac{S21}{S28}$ 1968
41.10	Wash, 50 lks. wide, 2 ft. deep, drains SW.
50.80	Spur, slopes S.
57.30	Ridge, bears NE. and SW.
69.10	Southern Pacific Railroad, bears N. 40° E. and S. 40° W.
69.50	Telegraph line, bears N. 40° E. and S. 40° W.
71.60	Wash, 40 lks. wide, 2 ft. deep, drains S. 40° W.
73.00	Spur, slopes SE.
74.00	Wash, 20 lks. wide, 1 ft. deep, drains SE.
80.12	The cor. of secs. 20, 21, 28 and 29. Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.
	The cor. of secs. 8, 9, 16 and 17, monumented by a granite stone, 18x7x5 ins., set 10 ins. in the ground, mkd. 4 notches on E. and S. faces, mound of stone W. At the corner point Set the iron post 18 ins. in the ground, in a collar of stone, brass cap mkd. T5S R30E S 8 S 9 S17 S16 1968 from which A fence cor., bears S. 35° E., 3 lks. dist.; fences bear E., S. and W. Deposit the orig. cor. stone alongside the iron post. Raise a mound of stone W. of the cor. N. 0°27' W., bet. secs. 8 and 9.

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS

Over rolling land, through moderate undergrowth.

3.00 Saddle of a ridge, bears E. and W.

4.30 Track road, bears E. and W.

11.00 Spur, slopes W.

29.70 Wash, 15 lks. wide, 2 ft. deep, drains SW.

39.94 The $\frac{1}{2}$ sec. cor. of secs. 8 and 9, monumented by a volcanic stone, 20x12x6 ins., set 12 ins. in the ground, mkd. $\frac{1}{2}$ on W. face, mound of stone W.

At the corner point

Set the iron post 20 ins. in the ground, brass cap mkd.

T5S R30E
 $\frac{1}{2}$
 S 8 | S 9
 1968

Deposit the orig. cor. stone alongside the iron post.

Raise a mound of stone W. of the cor.

N. 0°44' E., beginning new measurement.

Over rolling land, through moderate undergrowth.

2.00 Track road, bears E. and W.

10.00 Wash, 15 lks. wide, 1 ft. deep, drains SE.

29.50 Underground pipe line, bears S. 50° E. and N. 50° W.

40.06 The cor. of secs. 4, 5, 8 and 9, monumented by a volcanic stone, 18x8x5 ins., set 10 ins. in the ground mkd. 5 notches on S. and 4 notches on E. faces.

At the corner point

Set the iron post 20 ins. in the ground, brass cap mkd.

T5S R30E
 S 5 | S 4
 S 8 | S 9
 1968

Bury the orig. cor. stone alongside the iron post.

Raise a mound of stone W. of the cor.

Land, rolling.
 Soil, gravelly loam.
 Timber, none.
 Undergrowth, creosote bush, cacti and bunch grass.

From the cor. of secs. 3, 4, 9 and 10.
 S. 89°56' W., bet. secs. 4 and 9.

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS	
	Over rolling land, through moderate undergrowth.
4.80	Ridge, bears NE. and SW.
13.40	Wash, 15 lks. wide, 1 ft. deep, drains irregularly S.
18.10	Spur, slopes S. 20° E.
24.40	Ridge, bears N. 20° E. and S. 20° W.
34.20	Wash, 20 lks. wide, 1 ft. deep, drains irregularly S.
40.09	The ¼ sec. cor. of secs. 4 and 9, monumented by a volcanic stone, 14x10x8 ins., set 8 ins. in the ground, mkd. ¼ S on N. face, mound of stone N.
	At the corner point
	Set the iron post 20 ins. in the ground, brass cap mkd.
	T5S R30E ¼ <u> S 4 </u> S 9 1968
	Bury the orig. cor. stone alongside the iron post.
	Raise a mound of stone N. of the cor.

	S. 89°37' W., beginning new measurement.
	Over rolling land, through moderate undergrowth.
3.90	Ridge, bears N. 30° E. and S. 30° W.
11.60	Wash, 20 lks. wide, 1 ft. deep, drains SW.
16.30	Spur, slopes S. 20° W.
19.965	Point for the W 1/16 sec. cor. of secs. 4 and 9, at proportionate dist.
	Set the iron post 22 ins. in the ground, brass cap mkd.
	T5S R30E W1/16 <u> S 4 </u> S 9 1968
	Raise a mound of stone N. of the cor.
20.43	Wash, 40 lks. wide, 2 ft. deep, drains S. 10° E.
39.93	The cor. of secs. 4, 5, 8 and 9.
	Land, rolling.
	Soil, gravelly loam.
	Timber, none.
	Undergrowth, creosote bush, cacti and bunch grass.
	N. 0°10' W., bet. secs. 4 and 5.

Dep Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS	
	Over rolling land, through moderate undergrowth.
19.00	Enter near level land, bears E. and W.
20.03	Point for the S 1/16 sec. cor. of secs. 4 and 5, at proportionate dist. Set the iron post 20 ins. in the ground, brass cap mkd. <div style="text-align: center;"> T5S R30E S1/16 S 5 S 4 1968 </div>
	Raise a mound of stone W. of the cor.
39.30	Television Cable, bears E. and W.
40.06	The 1/4 sec. cor. of secs. 4 and 5, monumented by a volcanic stone, 18x17x10 ins., set 10 ins. in the ground, mkd. 1/4 S on W. face. At the corner point Set the iron post 22 ins. in the ground, brass cap mkd. <div style="text-align: center;"> T5S R30E 1/4 S 5 S 4 1968 </div>
	Bury the orig. cor. stone alongside the iron post. Raise a mound of stone W. of the cor. <hr style="width: 20%; margin: 0 auto;"/>
	N. 0°08' W., beginning new measurement. Over nearly level land, through moderate undergrowth.
11.50	Graded road, bears E. and W.
12.80	N. rim of mesa, bears E. and W.; desc. N. slope.
20.79	Point for the N 1/16 sec. cor. of secs. 4 and 5, at proportionate dist. Set the iron post 20 ins. in the ground, brass cap mkd. <div style="text-align: center;"> T5S R30E N1/16 S 5 S 4 1968 </div>
	Raise a mound of stone W. of the cor.
38.80	Intersect the N. bdy. of the Tp. Point for the closing cor. of secs. 4 and 5. Set the iron post 20 ins. in the ground, brass cap mkd. <div style="text-align: center;"> T4S S32 <hr style="width: 50%; margin: 0 auto;"/> S5 S4 C C T5S R30E 1968 </div>

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS	
	<p>from which</p> <p>The orig. closing cor., bears N. 0°08' W., 133 lks. dist., monumented by a volcanic stone, 15x9x9 ins. showing above the ground, mkd. 4 notches on E., 2 notches on W. and CC on S. faces, mound of stone W. I rebuild the mound of stone and remark the cor. to function as AM.</p> <p>The cor. of secs. 32 and 33, T. 4 S., R. 30 E., bears S. 89°43' E., 162 lks. dist.</p> <p>Raise a mound of stone S. of the cor.</p> <p>Land, rolling and nearly level. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>Point for the ¼ sec. cor. of sec. 4 is at midpoint between the closing corners and on the N. bdy. of the Tp.</p> <p>Set the iron post 14 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;"> $\frac{1}{4} \frac{T4S}{S 4}$ T5S R30E 1968 </p> <p>from which</p> <p>The ¼ sec. cor. of sec. 33, T. 4 S., R. 30 E., bears S. 89°57' E., 116 lks. dist.</p>
7.50	Ridge, bears E. and W.; desc. into canyon.
14.50	Wash in bottom of canyon, drains W.; asc. S. slope.
18.00	Ridge, bears E. and W.
33.00	Begin descending N. slope of canyon over-looking the Gila River, bearing N. 70° E. and S. 70° W.
34.05	Point selected for the witness ¼ sec. cor. of secs. 31 and 32.
	<p>From the Standard cor. of secs. 31 and 32 on the S. bdy. of the Tp.</p> <p>N. 0°52' W., bet. secs. 31 and 32.</p> <p>Over rolling land through moderate undergrowth.</p> <p>Set the iron post 18 ins. in the ground, in a collar of stone, brass cap mkd.</p> <p style="text-align: center;"> T5S R30E $\frac{1}{4}$ W C S31 S32 1968 </p>

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS	
38.70	Left bank of the Gila River, bears N. 70° E. and S. 70° W.
39.60	S. edge of an island in the center of the Gila River.
40.05	Point for the ¼ sec. cor. of secs. 31 and 32, at proportionate dist.; unable to find any remaining evidence of the original corner. This point falls in an unsafe position in the Gila River area, impractical to monument.
42.40	N. edge of same island.
43.00	Right bank of the Gila River, bears N. 70° E. and S. 70° W.
	Begin ascending S. slope.
46.00	Ridge over-looking the Gila River, bears N. 70° E. and S. 70° W.
47.00	Power line, bears S. 80° E. and N. 80° W.
64.60	Spur, slopes E.
76.00	Old railroad bed, bears S. 20° E. and N. 20° W.
80.10	The cor. of secs. 29, 30, 31 and 32, monumented by a sandstone, 20x14x6 ins., set 10 ins. in the ground, mkd. 5 notches on E. and 1 notch on S. faces, mound of stone W.
	At the corner point
	Set the iron post 8 ins. in the ground, mound of stone to top, brass cap mkd.
	<p>T5S R30E <u>S30</u> <u>S29</u> <u>S31</u> <u>S32</u> 1968</p>
	Deposit the orig. cor. stone alongside the iron post.
	Raise a mound of stone W. of the cor.
	Land, rolling and broken.
	Soil, rocky and gravelly loam.
	Timber, none.
	Undergrowth, creosote bush, cacti and bunch grass.
	From the cor. of secs. 28, 29, 32 and 33.
	N. 88°57' W., bet. secs. 29 and 32.
	Over rolling land, through moderate undergrowth.
2.30	Wash, 50 lks. wide, 2 ft. deep, drains S.
4.60	Southern Pacific Railroad, bears N. and S.
5.50	Telegraph line, bears N. and S.
13.40	E. edge mesa, bears N. and S., thence over nearly level mesa top.
23.00	W. edge of same mesa, bears N. and S.

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS	
35.30	Track road, bears N. 10° E. and S. 10° W.
40.83	<p>The ¼ sec. cor. of secs. 29 and 32, monumented by a volcanic stone, 18x10x8 ins., set 10 ins. in the ground, mkd. ¼ S on N. face, mound of stone N.</p> <p>At the corner point</p> <p>Set the iron post 15 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>T5S R30E</p> <p>¼ $\frac{S29}{S32}$</p> <p>1968</p> </div> <p>Deposit the orig. cor. stone alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89°30' W., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p>
16.50	Wash, 40 lks. wide, 1 ft. deep, drains S. 15° W.
21.10	Same wash, drains N. 15° W.
26.20	Same wash, drains irregularly SW.
39.87	<p>The cor. of secs. 29, 30, 31 and 32.</p> <p>Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	S. 89°53' W., bet. secs. 30 and 31.
	Over rolling land, through moderate undergrowth.
.10	Old railroad bed, bears S. 20° E. and N. 20° W.
3.30	Track road, bears N. and S.
13.00	Wash 40 lks. wide, 2 ft. deep, drains SW.
30.90	Wash, 30 lks. wide, 1 ft. deep, drains SW.
33.10	Wash, 30 lks. wide, 1 ft. deep, drains SE.
39.00	Ridge, bears N. 25° E. and S. 25° W.
39.79	<p>The ¼ sec. cor. of secs. 30 and 31, monumented by a volcanic stone, 18x10x8 ins., set 10 ins. in the ground, mkd. ¼ on N. face, mound of stone N.</p> <p>At the corner point</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T5S R30E</p> <p>S30</p> <p>¼ $\frac{S31}{S31}$</p> <p>1968</p> </div> <p>Bury the orig. cor. stone alongside the iron post.</p>

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS	
	<p>Raise a mound of stone N. of the cor.</p> <hr style="width: 20%; margin: 0 auto;"/> <p>N. 89°38' W., beginning new measurement.</p> <p>Over broken land, through moderate undergrowth.</p>
6.00	Wash, 10 lks. wide, 1 ft. deep, drains S. 10° W.
12.00	E. rim of canyon, bears S. 60° E. and N. 60° W.; desc. W. slope.
	Thence by triangulation, topography as scaled from U.S.C & G.S. Quadrangle-Duncan #2 NE, Arizona, scale, 1,24000.
17.00	Right bank of the Gila River, bears S. 60° E. and N. 60° W.
20.00	Left bank of the Gila River, bears S. 60° E. and N. 60° W.; asc. E. slope.
20.78	Point for the W 1/16 sec. cor. of secs. 30 and 31, at proportionate dist.; not monumented.
24.00	W. rim of canyon, bears S. 60° E. and N. 60° W.; end of triangulation.
34.90	Track road, bears N. and S.
38.96	The cor. of secs. 30 and 31, on the W. bdy. of the Tp.
	<p>Land, rolling and broken. Soil, rocky and gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>From the cor. of secs. 29, 30, 31 and 32.</p> <p>N. 1°22' E., bet. secs. 29 and 30.</p> <p>Over rolling land, through moderate undergrowth.</p>
1.40	Track road, bears S. 80° E. and N. 80° W.
4.20	Wash, 40 lks. wide, 1 ft. deep, drains S. 80° W.
29.30	Wash, 30 lks. wide, 1 ft. deep, drains irregularly SW.
40.09	<p>The 1/4 sec. cor. of secs. 29 and 30, monumented by a granite stone, 14x12x10 ins., set 6 ins. in the ground, mkd. 1/4 S on W. face, mound of stone W.</p> <p>At the corner point</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T5S R30E 1/4 S30 S29 1968</p> <p>Bury the orig. cor. stone alongside the iron post.</p>

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS									
	<p>Raise a mound of stone W. of the cor.</p> <p>The cor. is located 2 lks. SE of a squared wooden post, projecting 3½ ft. above the ground.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 2°03' W., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p>								
24.90	Track road, bears N. 30° E. and S. 30° W.								
40.30	<p>The cor. of secs. 19, 20, 29 and 30, monumented by a granite stone, 14x8x6 ins., loosely set in a mound of stone, mkd. 5 notches on one face and 2 notches on one face, with a squared 4x4 wooden post set alongside.</p> <p>At the corner point</p> <p>Set the iron post 10 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto;"> <tr><td colspan="2">T5S R30E</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">\$19</td><td style="padding-left: 5px;">\$20</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">\$30</td><td style="padding-left: 5px;">\$29</td></tr> <tr><td colspan="2">1968</td></tr> </table> </div> <p>Deposit the orig. cor. stone alongside the iron post.</p> <p>Reset the squared wooden post alongside the cor.</p> <p>Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, croeosote bush, cacti and bunch grass.</p>	T5S R30E		\$19	\$20	\$30	\$29	1968	
T5S R30E									
\$19	\$20								
\$30	\$29								
1968									
	<p>From the cor. of secs. 20, 21, 28 and 29.</p> <p>S. 89°55' W., bet. secs. 20 and 29.</p> <p>Over rolling land, through moderate undergrowth.</p> <p>4.30 Track road, bears S. 30° E. and N. 30° W.</p> <p>8.90 Track road, bears N. 10° E. and S. 10° W.</p> <p>26.10 Wash, 30 lks. wide, 1 ft. deep, drains S. 10° E.</p> <p>29.60 Track road, bears N. and S.</p> <p>38.20 Draw, drains SW.</p> <p>40.01 The ¼ sec. cor. of secs. 20 and 29, monumented by a volcanic stone, 18x10x10 ins., set 10 ins. in the ground, mkd. ¼ S on N. face, mound of stone N.</p> <p>At the corner point</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto;"> <tr><td colspan="2">T5S R30E</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">¼ \$20</td><td style="padding-left: 5px;">\$29</td></tr> <tr><td colspan="2">1968</td></tr> </table> </div>	T5S R30E		¼ \$20	\$29	1968			
T5S R30E									
¼ \$20	\$29								
1968									

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS	
<p>12.90 32.20 37.30 40.34</p>	<p>Bury the orig. cor. stone alongside the iron post. Raise a mound of stone N. of the cor.</p> <hr/> <p>N. 89°48' W., beginning new measurement. Over rolling land, through moderate undergrowth. Wash, 30 lks. wide, 1 ft. deep, drains S. 10° W. Wash, 5 lks. wide, 3 ft. deep, drains S. Track road, bears N. 20° E. and S. 20° W. The cor. of secs. 19, 20, 29 and 30. Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
<p>15.60 17.40 18.00 19.20 36.90 39.96</p>	<p>N. 89°59' W., bet. secs. 19 and 30. Over rolling land, through moderate undergrowth. Spur, slopes N. Wash, 50 lks. wide, 3 ft. deep, drains S. 20° W. Spur, slopes S. Wash, 20 lks. wide, 1 ft. deep, drains S. Wash, 10 lks. wide, 1 ft. deep, drains irregularly SW. The ¼ sec. cor. of secs. 19 and 30, monumented by a granite stone, 14x9x9 ins., loosely set in a mound of stone, mkd. ¼ S on one face, with a squared 4x4 wood post alongside. At the corner point Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T5S R30E ¼ <u>S19</u> S30 1968</p> <p>from which</p> <p style="text-align: center;">A Bench Mark, bears N. 81°12' W., 327 lks. dist., monumented by a brass tablet, 3 ins. diam., set in a cement block, mkd. E40 1934.</p> <p>Deposit the orig. cor. stone alongside the iron post. Reset the wooden post alongside the cor.</p> <hr/> <p>S. 89°57' W., beginning new measurement.</p>

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS	
	Over rolling land, through moderate undergrowth.
1.00	Wash, 5 lks. wide, 1 ft. deep, drains S.
5.00	Old Safford Highway, bears N. 30° E. and S. 30° W.
13.50	Wash, 40 lks. wide, 1 ft. deep, drains S.
23.90	Old railroad bed, bears S. 50° E. and N. 50° W.
35.00	Wash, 30 lks. wide, ½ ft. deep, drains S. 20° W.
38.03	The cor. of secs. 19 and 30, on the W. bdy. of the Tp. Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.
	From the cor. of secs. 19, 20, 29 and 30. N. 0°20' W., bet. secs. 19 and 20. Over rolling land, through moderate undergrowth.
11.50	Track road, bears SE. and NW.
17.40	Wash, 35 lks. wide, 1 ft. deep, drains N. 70° W.
20.40	Spur, slopes W.
24.30	Wash, 50 lks. wide, 2 ft. deep, drains SW.
40.14	Point for the ¼ sec. cor. of secs. 19 and 20, at proportionate dist.; unable to find any remaining evidence of the original cor. Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd. T5S R30E ¼ S19 S20 1968
45.00	Ridge, bears N. 10° E. and S. 10° W.
55.80	Ridge, bears E. and W.
60.20	Wash, 30 lks. wide, 1 ft. deep, drains W.
63.00	Wash, 30 lks. wide, 1 ft. deep, drains W.
70.00	Wash, 10 lks. wide, 1 ft. deep, drains S. 10° E.
76.50	Track road, bears S. 30° E. and N. 20° W.
80.28	The cor. of secs. 17, 18, 19 and 20, monumented by a granite stone, 18x9x9 ins., set 10 ins. in the ground, mkd. 5 notches on E. and 3 notches on S. faces. At the corner point Set the iron post 18 ins. in the ground, in a collar of stone, brass cap mkd.

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS

T5S R30E
 S18|S17
 S19|S20
 1968

Bury the orig. cor. stone alongside the iron post.

Raise a mound of stone W. of the cor.

Land, rolling.

Soil, gravelly loam.

Timber, none.

Undergrowth, creosote bush, cacti and bunch grass.

S. 89°46' W., bet. secs. 18 and 19.

Over rolling land, through moderate undergrowth.

2.20 Track road, bears S. 40° E. and N. 40° W.

8.90 Old Safford Highway, bears NE. and SW.

19.80 Wash, 20 lks. wide, 1 ft. deep, drains S. 80° W.

39.50 Low ridge, bears N. and S.

40.10 The $\frac{1}{4}$ sec. cor. of secs. 18 and 19, monumented by a granite stone, 15x7x9 ins., set 8 ins. in the ground, mkd. $\frac{1}{4}$ on N. face, mound of stone N.

At the corner point

Set the iron post 20 ins. in the ground, brass cap mkd.

T5S R30E
 $\frac{1}{4}$ S18
 S19
 1968

Bury the orig. cor. stone alongside the iron post.

Raise a mound of stone N. of the cor.

S. 89°52' W., beginning new measurement.

Over rolling land, through moderate undergrowth.

9.00 Wash, 30 lks. wide, 1 ft. deep, drains irregularly S.

15.90 Ridge, bears N. and S.

22.50 Wash, 40 lks. wide, 2 ft. deep, drains S.

26.50 Ridge, bears N. and S.

37.42 The cor. of secs. 18 and 19, on the W. bdy. of the Tp.

Land, rolling.

Soil, gravelly loam.

Timber, none.

Undergrowth, creosote bush, cacti and bunch grass.

From the cor. of secs. 17, 18, 19 and 20.

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E

CHAINS							
	N. 0°04' W., bet. secs. 17 and 18.						
	Over rolling land, through moderate undergrowth.						
15.20	Old Safford Highway, bears N. 50° E. and S. 50° W.						
17.00	Telegraph line, bears N. 85° E. and S. 85° W.						
18.80	Southern Pacific Railroad, bears N. 85° E. and S. 85° W.						
20.00	Track road, bears irregularly E. and W.						
24.80	Wash, 30 lks. wide, 1 ft. deep, drains S. 10° W.						
40.14	The ¼ sec. cor. of secs. 17 and 18, monumented by a volcanic stone, 16x6x6 ins., firmly set in a mound of stone, mkd. ¼ S on W. face, with a squared 4x4 wooden post set alongside.						
	At the corner point						
	Set the iron post 20 ins. in the ground, brass cap mkd.						
	<p style="text-align: center;">T5S R30E</p> <p style="text-align: center;">¼</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S18</td> <td style="padding: 0 5px;">S17</td> </tr> <tr> <td colspan="2" style="text-align: center;">1968</td> </tr> </table>	S18	S17	1968			
S18	S17						
1968							
	Bury the orig. cor. stone alongside the iron post.						
	Raise a mound of stone W. of the cor.						
	N. 0°01' W., beginning new measurement.						
	Over rolling land, through moderate undergrowth.						
25.70	Telephone line, bears N. 75° E. and S. 75° W.						
33.90	Track road, bears SE. and NW.						
35.60	Ridge, bears E. and W.						
40.07	The cor. of secs. 7, 8, 17 and 18, monumented by a mound of stone with a 4x4 wooden post. This position is harmoniously related to existing original corners and is accepted as the best existing evidence of the position of the original cor.						
	At the corner point						
	Set the iron post 12 ins. in the ground, mound of stone to top, brass cap mkd.						
	<p style="text-align: center;">T5S R30E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 7</td> <td style="padding: 0 5px;">S 8</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S18</td> <td style="padding: 0 5px;">S17</td> </tr> <tr> <td colspan="2" style="text-align: center;">1968</td> </tr> </table>	S 7	S 8	S18	S17	1968	
S 7	S 8						
S18	S17						
1968							
	from which						
	U.S.C.&G.S. Triangulation Station Gillard, bears S. 42°21' E., 22.51 chs. dist., monumented by a bronze disk, set in a 12 inch square concrete block, projecting 2 ins. above the ground, mkd. GILLARD 1945.						

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS	
	<p>Reset the squared 4x4 wooden post alongise the iron post.</p> <p>Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>From the cor. of secs. 8, 9, 16 and 17.</p> <p>S. 89°58' W., bet. secs. 8 and 17.</p> <p>Over rolling land, through moderate undergrowth.</p>
1.30	Fence, bears N. 87° E. and S. 87° W.
4.50	Ridge, bears NE. and SW.
14.30	Wash, 20 lks. wide, 1 ft. deep, drains S. 20° W.
23.80	Wash, 80 lks. wide, 3 ft. deep, drains S.
31.80	Fence, bears S. 30° E. and N. 30° W.
33.50	Center of U. S. Highway No. 666, bears S. 30° E. and N. 30° W.
35.20	Fence, bears S. 30° E. and N. 30° W.
39.98	<p>The ¼ sec. cor. of secs. 8 and 17, monumented by a granite stone, 20x10x6 ins., set 15 ins. in the ground mkd. ¼ S. on N. face, mound of stone N.</p> <p>At the corner point</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T5S R30E</p> <p>¼ $\frac{S\ 8}{S17}$</p> <p>1968</p> </div> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone N. of the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89°58' W., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p>
2.70	Wash, 20 lks. wide, 1 ft. deep, drains SE.
9.20	Track road, bears S. 25° E. and N. 25° W.
11.50	Old Safford Highway, bears N. 32° E. and S. 32° W.
11.80	Telephone line, bears N. 30° E. and S. 30° W.
17.20	Wash, 10 lks. wide, 1 ft. deep, drains S. 85° W.
20.08	<p>Point for the W 1/16 sec. cor. of secs. 8 and 17, at proportionate dist.</p> <p>Set the iron post 15 ins. in the ground, mound of stone to top, brass cap mkd.</p>

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS		
	<p style="text-align: center;">T5S R30E $W1/16 \frac{S 8}{S17}$ 1968</p>	
	<p>from which</p>	
	<p style="padding-left: 40px;">A squared 4x4 wooden post 4 ft. long, bears S. 86°32' E., 17 lks. dist., projects 3 ft. above ground.</p>	
24.40	<p>Wash, 25 lks. wide, 1 ft. deep, drains N. 85° W.</p>	
28.40	<p>Spur, slopes N. 20° W.</p>	
40.16	<p>The cor. of secs. 7, 8, 17 and 18.</p>	
	<p>Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>	
	<p>S. 89°46' W., bet. secs. 7 and 18.</p>	
	<p>Over rolling land, through moderate undergrowth.</p>	
2.60	<p>Draw, drains N. 10° W.</p>	
7.10	<p>Spur, slopes N. 10° W.</p>	
17.80	<p>Ridge, bears N. and S.</p>	
26.00	<p>Southern Pacific Railroad, bears N. 20° E. and S. 20° W.</p>	
31.50	<p>Telegraph line, bears N. 20° E. and S. 20° W.</p>	
39.81	<p>The ¼ sec. cor. of secs. 7 and 18, monumented by a volcanic stone, 18x8x6 ins., loosely set in a mound of stone, mkd. ¼ S on N. face.</p>	
	<p>At the corner point</p>	
	<p>Set the iron post 6 ins. in the ground, mound of stone to top, brass cap mkd.</p>	
	<p style="text-align: center;">T5S R30E $\frac{1}{4} \frac{S 7}{S18}$ 1968</p>	
	<p>Deposit the orig. cor. stone alongside the iron post.</p>	
	<p>The cor. falls in a draw, 2 lks. West of a 4x4 wooden post, firmly set. The draw drains S.</p>	
	<p>S. 89°45' W., beginning new measurement.</p>	
	<p>Over rolling land, through moderate undergrowth.</p>	
7.70	<p>Wash, 10 lks. wide, 1 ft. deep, drains N. 20° W.</p>	
14.50	<p>Ridge, bears S. 20° E. and N. 20° W.</p>	

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS	
24.30	Wash, 15 lks. wide, 1 ft. deep, drains N. 20° W.
33.40	Ridge, bears S. 10° E. and N. 10° W.
37.53	<p>The cor. of secs. 7 and 18, on the W. bdy. of the Tp.</p> <p>Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>From the cor. of secs. 7, 8, 17 and 18.</p> <p>N. 0°04' W., bet. secs. 7 and 8.</p> <p>Over rolling land, through moderate undergrowth.</p>
1.90	Spur, slopes NW.
9.40	Wash, 30 lks. wide, 1 ft. deep, drains N. 80° W.
13.50	Spur, slopes N. 80° W.
16.50	Wash, 40 lks. wide, 2 ft. deep, drains S. 70° W.
29.90	Wash, 30 lks. wide, 2 ft. deep, drains S. 80° W.
40.19	<p>The ¼ sec. cor. of secs. 7 and 8, monumented by a granite stone, 15x8x6 ins., set 8 ins. in the ground, mkd. ¼ S on W. face, mound of stone W.</p> <p>At the corner point</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T5S R30E S 7 ½ S 8 1968</p> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone W. of the cor.</p> <p>Cor. is located 3 lks. SE. of a 4x4 wooden post, firmly set.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°24' E., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p>
2.10	Ridge, bears NE. and SW.
19.00	Ridge, bears E. and W.
19.82	Point for the N 1/16 sec. cor. of secs. 7 and 8, at proportionate dist.; not monumented.
24.30	Wash, 30 lks. wide, 2 ft. deep, drains irregularly W.
28.20	Spur, slopes S. 60° W.
32.00	Wash, 20 lks. wide, 2 ft. deep, drains S. 60° W.
34.40	Fence, bears S. 55° E. and N. 55° W.

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS	
36.20	Center of U.S. Highway No. 666, bears S. 55° E. and N. 55° W.
38.90	Fence, bears S. 55° E. and N. 55° W.
39.40	Track road, bears E. and W.
39.64	The cor. of secs. 5, 6, 7 and 8, at proportionate dist.; unable to find any remaining evidence of the original cor.
	Set the iron post 18 ins. in the ground, in a collar of stone, brass cap mkd.
	T5S R30E $\begin{array}{r l} \text{S } 6 & \text{S } 5 \\ \text{S } 7 & \text{S } 8 \\ \hline & 1968 \end{array}$
	from which
	An abandoned E. and W. fence line, bears North 19 lks. dist. (Approx. Clifton, Arizona, city limits boundary).
	Raise a mound of stone W. of the cor.
	Land, rolling.
	Soil, gravelly loam.
	Timber, none.
	Undergrowth, creosote bush, cacti and bunch grass.
	From the cor. of secs. 4, 5, 8 and 9.
	N. 89°43' W., bet. secs. 5 and 8.
	Over rolling land, through moderate undergrowth.
1.40	Underground pipe line, bears S. 7° E. and N. 7° W.
8.60	Wash, 10 lks. wide, 1 ft. deep, drains S. 80° W.
13.40	Spur, slopes S. 20° W.
16.30	Wash, 30 lks. wide, 2 ft. deep, drains S.
24.40	Ridge, bears N. and S.
38.40	Wash, 40 lks. wide, 1 ft. deep, drains irregularly S
40.40	The 1/2 sec. cor. of secs. 5 and 8, monumented by a volcanic stone, 20x12x6 ins., set 12 ins. in the ground, mkd. 1/2 S on N. face, scattered mound of stone N.
	At the corner point
	Set the iron post 18 ins. in the ground, in a collar of stone, brass cap mkd.
	T5S R30E $\frac{1}{2} \begin{array}{r l} \text{S } 5 \\ \text{S } 8 \\ \hline & 1968 \end{array}$
	Deposit the orig. cor. stone alongside the iron post.
	Raise a mound of stone N. of the cor.

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS	
	S. 89°33' W., beginning new measurement. Over rolling land, through moderate undergrowth.
12.40	Telephone line, bears S. 5° E. and N. 5° W.
13.10	Ridge, bears S. 10° E. and N. 10° W.; desc. W. slope.
14.40	Graded road, bears S. 25° E. and N. 25° W.
20.00	Track road, bears S. 20° E. and N. 20° W.
23.00	Track road, bears E. and W.; thence along N. side of road.
39.73	The cor. of secs. 5, 6, 7 and 8. Land, rolling. Soil, rocky and gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.
	S. 89°53' W., bet. secs. 6 and 7. Over rolling land, through moderate undergrowth.
1.40	Fence, bears S. 40° E. and N. 40° W.
4.40	Center of U.S. Highway No. 666, bears S. 40° E. and N. 40° W.
6.00	Fence, bears S. 40° E. and N. 40° W.
8.50	Track road, bears N. 20° E. and S. 20° W.
19.84	Point for the E 1/16 sec. cor. of secs. 6 and 7, at proportionate dist. Set the iron post 22 ins. in the ground, brass cap mkd.
	<p>T5S R30E</p> <p>E 1/16 $\frac{S\ 6}{S\ 7}$</p> <p>1968</p>
	Raise a mound of stone N. of the cor. The cor. is located 16 lks. South of an E. and W. fence.
31.70	Track road, bears S. 30° E. and N. 30° W.
37.30	Southern Pacific Railroad, bears S. 31° E. and N. 31° W.
37.70	Telegraph line, bears S. 31° E. and N. 31° W.
38.30	Old railroad bed, bears S. 31° E. and N. 31° W.
39.68	Point for the 1/4 sec. cor. of secs. 6 and 7, at proportionate dist.; unable to find any remaining evidence of the original cor.; not monumented, thence by triangulation, topography as scaled from U.S.C. & G.S. Quadrangle Duncan #2 NE., scale 1,24000.
46.50	E. rim over-looking San Francisco River, bears NE. and SW.

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS	
47.80	Center of San Francisco River, course SW.
53.50	W. rim over-looking San Francisco River, bears N. and SW.
54.60	End of triangulation.
57.60	Draw, drains S. 20° W.
59.52	Point for the W 1/16 sec. cor. of secs. 6 and 7, at proportionate dist.
	Set the iron post 22 ins. in the ground, brass cap mkd.
	T5S R30E W1/16 $\frac{S\ 6}{S\ 7}$ 1968
	Raise a mound of stone N. of the cor.
68.40	Spur, slopes S.
69.70	Wash, 20 lks. wide, 1 ft. deep, drains SE.
77.48	The cor. of secs. 6 and 7, on the W. bdy. of the Tp.
	Land, rolling and broken. Soil, rocky and gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.
	From the cor. of secs. 5, 6, 7 and 8.
	N. 0°33' E., bet. secs. 5 and 6.
	Over rolling land, through moderate undergrowth.
.19	Fence, bears E. and W.
4.70	Confluence of washes, from N. 75° E. and S. 80° E.; drains N. 70° W.
13.90	Ridge, with an old track road, bears E. and W.
22.30	Wash, 30 lks. wide, 1 ft. deep, drains irregularly W.
29.60	Ridge, with an old track road, bears E. and W.
33.90	Wash, 30 lks. wide, 2 ft. deep, drains W.
38.40	Spur, slopes S. 70° W.
39.65	Point for the $\frac{1}{4}$ sec. cor. of secs. 5 and 6, at proportionate dist.; unable to find any remaining evidence of the original cor.
	Set the iron post 14 ins. in the ground, mound of stone to top, brass cap mkd.
	T5S R30E $\frac{1}{4}$ S 6 S 5 1968

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS	
	The cor. is located on a NW. slope.
41.10	Draw, drains S. 70° W.
42.80	Old graded road, bears E. and W.
46.30	Ridge, bears E. and W.
52.70	Wash, 40 lks. wide, 2 ft. deep, drains irregularly W.
62.30	Ridge, bears E. and W.
66.00	Wash, 20 lks. wide, 1 ft. deep, drains W.
72.90	Underground pipe line, on top of ridge, bears S. 55° E. and N. 55° W.
79.30	Intersect the N. bdy. of the Tp.
	Point for the closing cor. of secs. 5 and 6, at proportionate dist.; unable to find any remaining evidence of the original cor.
	Set the iron post 15 ins. in the ground, mound of stone to top, brass cap mkd.
	<p>T4S R30E <u>S31</u> S 6 S 5 C C T5S 1968</p>
	from which
	The cor. of secs. 31 and 32, T. 4 S., R. 30 E., bears S. 89°45' E., 163 lks. dist.
	The cor. of Tp. 4 and 5 S., R. 30 E., bears N. 89°45' W., 77.98 chs. dist., monumented by a granite stone 7x7x4 ins. showing above the ground, mkd. 6 notches on N., E. and S. faces.
	This control line was fully retraced, and careful search was made for evidence of intervening corners, none of which was recovered.
	Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.
	Point for the ¼ sec. cor. of sec. 5 is at midpoint bet. the closing cors. and on the N. bdy. of the Tp.
	Set the iron post 8 ins. in the ground, mound of stone to top, brass cap mkd.
	<p>T4S <u>¼ S 5</u> T5S R30E 1968</p>

Dep. Res., Portion Subdivisional Lines, T. 5 S., R. 30 E.

CHAINS	
	<p>from which</p> <p>The $\frac{1}{4}$ sec. cor. of sec. 32, T. 4 S., R. 30 E., bears S. $89^{\circ}41'$ E., 167 lks. dist.</p> <p>The cor. is located on a NE. slope.</p>
	<p>Subdivision of the Sections Township 5 South, Range 30 East</p>
	<p>Subdivision of Section 34</p>
	<p>From the Standard $\frac{1}{4}$ sec. cor. of sec. 34, on the S. bdy. of the Tp.</p> <p>N. $0^{\circ}53'$ W., on the N. and S. center line of sec. 34.</p> <p>Over rolling land, through moderate undergrowth.</p>
1.80	Spur, slopes NW., desc. N. slope.
4.70	Bottom of Buzzard Roost Canyon, 5.00 chs. wide, drains S. 60° W.
7.40	Begin ascending S. slope.
10.30	Spur, slopes E.; desc. N. slope.
11.50	Re-enter Buzzard Roost Canyon, drains irregularly S.
20.70	Point for the C-S $\frac{1}{16}$ sec. cor. of sec. 34; not monumented.
22.50	Leave same canyon; asc. SE. slope.
41.40	Point for the center $\frac{1}{4}$ sec. cor. of sec. 34 at intersection with the E. and W. centerline of sec. 34; not monumented.
46.80	Graded road, bears N. 45° E. and S. 45° W.
79.54	The $\frac{1}{4}$ sec. cor. of secs. 27 and 34.
	<p>Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>From the $\frac{1}{4}$ sec. cor. of secs. 34 and 35.</p> <p>S. $89^{\circ}20'$ W., on the E. and W. centerline of sec. 34.</p> <p>Over rolling land, through moderate undergrowth.</p>
3.70	Wash, 10 lks. wide, 1 ft. deep, drains S.
8.50	Low ridge, bears N. and S.
23.90	Wash, 10 lks. wide, 3 ft. deep, drains S.

Subdivision of Sections, T. 5 S., R. 30 E.

CHAINS	
29.30	E. rim of Buzzard Roost Canyon, bears N. and S.; desc. W. slope.
34.50	Wash, in bottom of same canyon, drains S.; asc. E. slope.
41.31	The point for the Center $\frac{1}{4}$ sec. cor. of sec. 34.
45.40	W. rim of same canyon, bears N. 10° E. and S.
45.80	Graded road, bears N. 10° E. and S.
48.30	E. rim of Rattlesnake Canyon, bears N. and S.; desc. W. slope.
60.60	Bottom of same canyon, wash, drains irregularly S.; asc. E. slope.
61.425	Point for the C-W $\frac{1}{16}$ sec. cor. of sec. 34. Set the iron post 20 ins. in the ground, brass cap mkd. <div style="text-align: center;"> <p>T5S R30E $\frac{W \frac{1}{16}}{S34}$ C—C 1968</p> </div> Raise a mound of stone N. of the cor.
68.50	W. rim of same canyon, bears N. and S.; thence along top of mesa.
76.70	E. rim of mesa, bears N. and S.; desc. W. slope.
81.54	The $\frac{1}{4}$ sec. cor. of secs. 33 and 34. Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.
Subdivision of the SW $\frac{1}{4}$ of Sec. 34.	
	From the point for the standard W $\frac{1}{16}$ sec. cor. of sec. 34, on the S. bdy. of the Tp. N. 1°01' W., on the N. and S. center line of the SW $\frac{1}{4}$ of sec. 34. Over rolling land, through moderate undergrowth.
5.20	Small draw, drains SW.
9.80	Spur, slopes W.
14.00	E. rim of Rattlesnake Canyon, bears NE. and SW.; desc. NW. slope.
20.55	Point for the SW $\frac{1}{16}$ sec. cor. of sec. 34, at intersection with E. and W. centerline of the SW $\frac{1}{4}$ of sec. 34.

Subdivision of Sections, T. 5 S., R. 30 E.

CHAINS	
	<p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T5S R30E SW 1/16 S34 1968</p> <p>Raise a mound of stone W. of the cor.</p>
25.00	Wash in center of Rattlesnake Canyon, drains SW.
41.10	The C-W 1/16 sec. cor. of sec. 34.
	<p>From the point for the C-S 1/16 sec. cor. of sec. 34.</p> <p>S. 89°41' W., on the E. and W. centerline of the SW$\frac{1}{4}$, sec. 34.</p> <p>Over rolling land, through moderate undergrowth.</p>
1.60	Leave canyon bottom, bears N. and S.; asc. E. slope.
7.50	W. rim of Buzzard Roost Canyon, bears N. and S.
8.70	Graded road, bears N. and S.
15.70	E. rim of Rattlesnake Canyon, bears N. and S.; desc. W. slope.
20.07	The SW 1/16 sec. cor. of sec. 34.
26.60	Wash, in bottom of Rattlesnake Canyon, 200 lks. wide, 3 ft. deep, drains SW.
32.70	Southern Pacific Railroad, on curve, bears S. and W.
33.00	Telegraph line, on curve, bears S. and W.
37.60	Right bank of Gila River on curve, bears S. and W.
40.14	True point for the S 1/16 sec. cor. of secs. 33 and 34, from which its witness cor. bears N. 1°10' W., 100 lks. dist.
	Subdivision of Section 10
	<p>From the $\frac{1}{4}$ sec. cor. of secs. 10 and 15.</p> <p>N. 0°03' E., on the N. and S. centerline of sec. 10.</p> <p>Over rolling land, through moderate undergrowth.</p> <p>Along E. edge of dyke, of a small lake being developed for recreation.</p>
10.00	Leave dyke, enter rolling land.
30.00	Graded road, bears S. 80° E. and N. 80° W. 50 lks. to junction of roads, bearing S. 80° E., S. 18° W. and N. 80° W.
31.00	Fence, bears E. and W.
40.20	Point for the Center $\frac{1}{4}$ sec. cor. of sec. 10, at intersection with the E. and W. centerline of sec. 10.

Subdivision of Sections, T. 5 S., R. 30 E.

CHAINS		
	<p>Set the iron post 20 ins. in the ground, in a collar of stone, brass cap mkd.</p> <p style="text-align: center;">T5S R30E C$\frac{1}{4}$ + S10 1968</p> <p>Deposit glass at base of the iron post.</p>	
45.30	Power line, bears S. 62° E. and N. 62° W.	
49.40	Wash, 5 lks. wide, $\frac{1}{2}$ ft. deep, drains S. 70° W.	
60.30	Low ridge, bears NE. and SW.	
65.20	Wash, 30 lks. wide, 2 ft. deep, drains SW.	
75.70	Abandoned road, on a curve, bears E. and S.; enter dry stock tank.	
76.20	Television cable, bears SE. and NW.; leave dry stock tank.	
80.36	<p>The $\frac{1}{4}$ sec. cor. of secs. 3 and 10.</p> <p>Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>	
	<p>From the $\frac{1}{4}$ sec. cor. of secs. 10 and 11.</p> <p>N. 89°26' W., on the E. and W. centerline of sec. 10.</p> <p>Over rolling land, through moderate undergrowth.</p>	
7.70	Wash, 20 lks. wide, 2 ft. deep, drains S.	
25.50	Wash, 100 lks. wide, 3 ft. deep, drains irregularly SW.	
30.20	Power line, bears SE. and NW.	
40.30	The center $\frac{1}{4}$ sec. cor. of sec. 10.	
47.50	Track road, bears SE. and NW.	
48.60	Power line, bears N. and S.	
49.20	Fence, bears N. and S.	
50.40	Graded road, bears S. 5° E. and N. 5° W.	
54.30	Wash in bottom of Soapbox Canyon, 50 lks. wide, 2 ft. deep, drains S.	
70.00	Wash, 15 lks. wide, 1 ft. deep, drains S.	
80.35	<p>The $\frac{1}{4}$ sec. cor. of secs. 9 and 10.</p> <p>Land, rolling. Soil, gravelly loam.. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>	

Subdivision of Sections, T. 5 S., R. 30 E.

CHAINS	Subdivision of Section 33
	<p>From the point for the standard $\frac{1}{4}$ sec. cor. of sec. 33, on the S. bdy. of the Tp.</p> <p>N. $0^{\circ}56'$ W., on the N. and S. centerline of sec. 33.</p> <p>Cross Gila River, course S. $15^{\circ}30'$ W.</p>
0.20	<p>Right bank of Gila River, bears N. $15^{\circ}30'$ E and S. $15^{\circ}30'$ W.; thence over rolling land, through moderate undergrowth.</p>
20.19	<p>Point for the C-S $\frac{1}{16}$ sec. cor. of sec. 33.</p> <p>Set the iron post 18 ins. in the ground, in a collar of stone, brass cap mkd.</p> <div style="text-align: center;"> <p>T5S R30E</p> <p>C</p> <p>S $\frac{1}{16}$ S33</p> <p>C</p> <p>1968</p> </div>
32.70	<p>Telegraph line, bears S. 30° E. and N. 30° W.</p>
34.40	<p>Southern Pacific Railroad, bears S. 30° E. and N. 30° W.</p>
40.38	<p>Point for the Center $\frac{1}{4}$ sec. cor. of sec. 33, at intersection with the E. and W. centerline of sec. 33.</p> <p>Set the iron post 6 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>T5S R30E</p> <p>C $\frac{1}{4}$ + S33</p> <p>1968</p> </div>
56.20	<p>Wash, 100 lks. wide, 1 ft. deep, drains S. 80° W.</p>
60.44	<p>Point for the C-N $\frac{1}{16}$ sec. cor. of sec. 33.</p> <p>Set the iron post 6 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>T5S R30E</p> <p>C</p> <p>N $\frac{1}{16}$ S33</p> <p>C</p> <p>1968</p> </div>
80.50	<p>The $\frac{1}{4}$ sec. cor. of secs. 28 and 33.</p> <p>Land, rolling.</p> <p>Soil, gravelly loam.</p> <p>Timber, none.</p> <p>Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>From the $\frac{1}{4}$ sec. cor. of secs. 33 and 34.</p> <p>S. $89^{\circ}37'$ W., on the E. and W. centerline of sec. 33.</p> <p>Over rolling land, through moderate undergrowth.</p>

Subdivision of Sections, T. 5 S., R. 30 E.

CHAINS	
3.40	Wash, 10 lks. wide, 2 ft. deep, drains irregularly S.
5.40	Spur, slopes S.
10.20	Wash, 15 lks. wide, 1 ft. deep, drains S.
19.90	Point for the C-E 1/16 sec. cor. of sec. 33. Set the iron post 6 ins. in the ground, mound of stone to top, brass cap mkd. T5S R30E E 1/16 C ————— C S33 1968
26.50	Spur, slopes SE.
28.60	Wash, 10 lks. wide, 1 ft. deep, drains S.
39.80	The Center ¼ sec. cor. of sec. 33.
43.40	Southern Pacific Railroad, bears S. 30° E. and N. 30° W.
44.20	Telegraph line, bears S. 30° E. and N. 30° W.
48.80	Ridge, bears SE. and NW.
55.10	Wash, 40 lks. wide, 2 ft. deep, drains S.
59.75	Point for the C-W 1/16 sec. cor. of sec. 33. Set the iron post 10 ins. in the ground, mound of stone to top, brass cap mkd. T5S R30E W 1/16 C ————— C S33 1968
66.40	Wash, 10 lks. wide, 1 ft. deep, drains SE.
70.20	Telegraph line, bears N. 60° E. and S. 60° W.
71.40	Southern Pacific Railroad, bears N. 60° E. and S. 60° W.
76.10	Southern Pacific Railroad, bears S. 55° E. and N. 55° W.
78.00	Telegraph line, bears S. 55° E. and N. 55° W.
79.70	The ¼ sec. cor. of secs. 32 and 33. Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.
Subdivision of the SE¼ of Section 33	
From the point for the Standard E 1/16 sec. cor. of sec. 33, on the S. bdy. of the Tp. N. 1°04' W., on the N. and S. centerline of the SE¼ of sec. 33.	

Subdivision of Sections, T. 5 S., R. 30 E.

CHAINS	
	Over rolling land, through moderate undergrowth.
8.30	Fence, bears N. 40° E. and S. 40° W.
20.04	Point selected for the witness SE 1/16 sec. cor. of sec. 33.
	Set the iron post 20 ins. in the ground, brass cap mkd.
	T5S R30E
	SE 1/16↑S33
	W C
	1968
	Set a wooden post 3 ins. diam., 3 ft. long, alongside the iron post.
	The cor. is located on the Left bank of the Gila River, bears NE. and SW.
20.24	Point for the SE 1/16 sec. cor. of sec. 33, at intersection with the E. and W. centerline of the SE¼, sec. 33. This cor. falls in an unsafe position, impractical to monument.
22.70	Right bank of the Gila River, bears NE. and SW.
29.20	Telegraph line, bears S. 70° E. and N. 70° W.
29.50	Southern Pacific Railroad, bears S. 70° E. and N. 70° W.
40.52	The C-E 1/16 sec. cor. of sec. 33.
	From the true point for the S 1/16 sec. cor. of secs. 33 and 34.
	S. 89°54' W., on the E. and W. centerline of the SE¼, sec. 33.
	Over river area, course NW.
3.50	Left bank of the Gila River, bears S. 65° E. and N. 65° W.
19.40	Left bank of the Gila River, bears NE. and SW.
19.95	True point for the SE 1/16 sec. cor. of sec. 33, from which its witness cor., bears S. 1°04' E., 20 lks. dist.
21.70	Right bank of the Gila River, bears NE. and SW.
39.90	The C-S 1/16 sec. cor. of sec. 33.
Subdivision of the SW¼ of Section 33	
	From the point for the Standard W 1/16 sec. cor. of sec. 33, on the S. bdy. of the Tp.
	N. 0°50' W., on the N. and S. centerline of the SW¼ of sec. 33.
	Over rolling land, through moderate undergrowth.
20.07	Point for the SW 1/16 sec. cor. of sec. 33, at intersection with the E. and W. centerline of the SW¼, sec. 33.

Subdivision of Sections, T. 5 S., R. 30 E.

CHAINS	
	<p>Set the iron post 14 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T5S R30E SW 1/16+S33 1968</p>
35.00	Wash, 10 lks. wide, 1 ft. deep, drains SE.
40.20	The C-W 1/16 sec. cor. of sec. 33.
<p>From the C-S 1/16 sec. cor. of sec. 33.</p> <p>S. 89°54' W., on the E. and W. centerline of the SW$\frac{1}{4}$, sec. 33.</p> <p>Over rolling land, through moderate undergrowth.</p>	
9.10	Enter wash area, drains S.
14.10	Leave wash area, drains S.
19.99	The SW 1/16 sec. cor. of sec. 33.
39.30	Wash, 5 lks. wide, $\frac{1}{2}$ ft. deep, drains SE.
39.98	The S 1/16 sec. cor. of secs. 32 and 33.
<p>Subdivision of Section 4</p>	
<p>From the $\frac{1}{4}$ sec. cor. of secs. 4 and 9.</p> <p>N. 0°11' E., on the N. and S. centerline of sec. 4.</p> <p>Over rolling land, through moderate undergrowth.</p>	
6.90	Ridge, bears NE. and SW.
18.00	Wash, 10 lks. wide, 2 ft. deep, drains SW.
19.95	Point for the C-S 1/16 sec. cor. of sec. 4.; not monumented.
27.40	Graded road, bears E. and W.
30.60	Ridge, bears N. 60° E. and S. 60° W.
34.10	Television cable, bears S. 85° E. and N. 85° W.
39.90	Point for the Center $\frac{1}{4}$ sec. cor. of sec. 4, at intersection with E. and W. centerline of sec. 4.
	<p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T5S R30E C $\frac{1}{4}$+S 4 1968</p> <p>from which</p> <p style="text-align: center;">The SE. cor. of Clifton Cemetery, bears N. 8° W., 7.10 chs. dist.</p> <p>Raise a mound of stone W. of the cor.</p>

Subdivision of Sections, T. 5 S., R. 30 E.

CHAINS	
42.00	Draw, drains N. 10° W.
44.20	Graded road, bears N. 65° E. and S. 65° W.
44.80	Track road, bears E and W.
45.80	Track road, bears NE. and SW.
56.20	Track road, bears SE. and NW.
60.06	Point for the C-N 1/16 sec. cor. of sec. 4. Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd. <div style="text-align: center;"> <p>C</p> <p>N 1/16 S 4</p> <p>C</p> <p>1968</p> </div>
66.40	Wash in bottom of Ward Canyon, 25 lks. wide, 1 ft. deep, drains irregularly W.
78.57	The 1/4 sec. cor. of sec. 4, on the N. bdy. of the Tp. Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.
	Point for the W 1/16 sec. cor. of sec. 4, is at midpoint bet. the closing cor. of secs. 4 and 5 and the 1/4 sec. cor. of sec. 4, and on the N. bdy. of the Tp. Set the iron post 22 ins. in the ground, brass cap mkd. <div style="text-align: center;"> <p>T4S</p> <hr style="width: 50%; margin: auto;"/> <p>W 1/16 S 4</p> <p>T5S R30E</p> <p>1968</p> </div> <p>from which</p> <p style="padding-left: 40px;">The cor. of secs. 32 and 33, T. 4 S., R. 30 E., bears N. 89°57' W., 18.58 chs. dist.</p> <p>Raise a mound of stone S. of the cor.</p>
	From the 1/4 sec. cor. of secs. 3 and 4. S. 89°50' W., on the E. and W. centerline of sec. 4. Over rolling land, through moderate undergrowth.
2.20	Graded road, bears S. 20° E. and N. 20° W.
6.40	Spur, slopes NW.
10.40	Wash, 10 lks. wide, 1 ft. deep, drains N. 10° W.
11.30	Track road, bears S. 10° E. and N. 10° W.
14.70	Spur, with track road, slopes N. 10° W.
16.30	Wash, 10 lks. wide, 1 ft. deep, drains N.
24.30	Graded road, on a curve, bears SE. and W.

Subdivision of Sections, T. 5 S., R. 30 E.

CHAINS	
39.80	Draw, drains N. 10° W.
40.10	The Center ½ sec. cor. of sec. 4.
57.40	Draw, drains N. 10° E.
60.17	Point for the C-W 1/16 sec. cor. of sec. 4. Set the iron post 22 ins. in the ground, brass cap mkd. <div style="text-align: center;"> $C \frac{W \ 1/16}{S \ 4} C$ <p>1968</p> </div> Raise a mound of stone N. of the cor.
67.20	Graded road, bears S. 30° E. and N. 30° W.
73.20	Wash, 10 lks. wide, 2 ft. deep, drains irregularly S. 10° E
80.24	The ½ sec. cor. of secs. 4 and 5. Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.
Subdivision of the SW¼ of Section 4	
11.00	From the W 1/16 sec. cor. of secs. 4 and 9. N. 0°02' W., on the N. and S. centerline of the SW¼ of sec. 4. Over rolling land, through moderate undergrowth. Spur, slopes W.
19.94	Point for the SW 1/16 sec. cor. of sec. 4, at intersection with the E. and W. centerline of the SW¼, sec. 4. Set the iron post 20 ins. in the ground, brass cap mkd. <div style="text-align: center;"> $SW \ 1/16 + S \ 4$ <p>1968</p> </div> Raise a mound of stone W. of the cor.
21.00	Draw, drains S. 70° W
35.90	Graded road, bears S 75° E. and N. 75° W.
36.60	Television cable, bears E. and W.
39.93	The C-W 1/16 sec. cor. of sec. 4.
	From the point for the C-S 1/16 sec. cor. of sec. 4. S. 89°47' W., on the E. and W. centerline of the SW¼, sec. 4. Over rolling land, through moderate undergrowth.

Subdivision of the Sections, T. 5 S., R. 30 E.

CHAINS	
5.00	Draw, drains SE.
11.20	Track road, bears N. 30° E. and S. 30° W.
20.00	The SW 1/16 sec. cor. of sec. 4.
21.80	Wash, 10 lks. wide, 1 ft. deep, drains SW.
27.30	Wash, 15 lks. wide, 1 ft. deep, drains SE.
40.05	The S 1/16 sec. cor. of secs. 4 and 5.
Subdivision of the NW¼ of Section 4	
From the C-W 1/16 sec. cor. of sec. 4.	
N. 0°04' E., on the N. and S. centerline of the NW¼, sec. 4.	
Over rolling land, through moderate undergrowth.	
10.00	Draw, drains NE.
17.00	Track road, bears NE. and SW.
20.43	Point for the NW 1/16 sec. cor. of sec. 4, at intersection with the E. and W. centerline of the NW¼, sec. 4.
Set the iron post 10 ins. in the ground, mound of stone to top, brass cap mkd.	
NW 1/16 + S 4 1968	
from which	
The NW. cor. of Clifton Cemetery, bears S. 64° E., 11.40 chs. dist.	
20.50	Wash, 15 lks. wide, 3 ft. deep, drains E.
31.80	Paved road to Cemetery, bears SE. and NW.
38.66	The W 1/16 sec. cor. of sec. 4 on the N. bdy. of the Tp.
From the C-N 1/16 sec. cor. of sec. 4.	
N. 89°14' W., on the E. and W. centerline of the NW¼, sec. 4.	
Over rolling land, through moderate undergrowth.	
.80	Draw, drains N. 80° W.
3.30	Spur, slopes N.
5.70	Track road, bears N. and S.
10.20	Wash, 15 lks. wide, 2 ft. deep, drains N. 30° E.
12.60	Spur, slopes N. 30° E.
17.00	Paved road to Cemetery, bears irregularly N. and S.

Subdivision of Sections, T. 5 S., R. 30 E.

CHAINS	
20.14	The NW 1/16 sec. cor. of sec. 4.
24.30	Spur, slopes NE.
28.30	Wash, 10 lks. wide, 1 ft. deep, drains N. 10° E.
33.60	Spur, slopes N. 10° E.
37.00	Draw, drains N. 10° E.
40.29	The N. 1/16 sec. cor. of secs. 4 and 5.
Subdivision of Section 31	
<p>From true point for the Standard ¼ sec. cor. of sec. 31. N. 0°42' W., on the N. and S. centerline of sec. 31. Over rolling land, through moderate undergrowth.</p>	
1.50	Wash, 40 lks. wide, 3 ft. deep, drains N. 80° E.
4.80	Spur, slopes E.
17.00	Spur, slopes N. 80° E.
20.05	<p>Point for the C-S 1/16 sec. cor. of sec. 31.</p> <p>Set the iron post over an "X" chiseled on solid rock, mound of stone to top, brass cap mkd.</p>
<pre> C S 1/16 S31 C 1968 </pre>	
28.50	Left bank of the Gila River, bears N. 50° E. and S. 50° W.
29.90	Right bank of the Gila River, bears N. 50° E. and S. 50° W.
40.10	<p>Point for the center ¼ sec. cor. of sec. 31, at the inter- section with the E. and W. centerline of sec. 31.</p> <p>Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T5S R30E C ¼ + S31 1968</p>
41.50	Track road, bears S. 80° E. and N. 80° W.
51.10	Power line, bears E. and W.
60.04	<p>Point for the C-N 1/16 sec. cor. of sec. 31.</p> <p>Set the iron post over an "X" chiseled on solid rock, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">C N 1/16 S31 C 1968</p>

Subdivision of Sections, T. 5 S., R. 30 E.

CHAINS	
61.60	Wash, 30 lks. wide, 3 ft. deep, drains W.
64.50	Ridge, bears S. 70° E. and N. 70° W.
70.40	Wash, 20 lks. wide, 2 ft. deep, drains W.
79.98	The ¼ sec. cor. of secs. 30 and 31.
	Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.
	From the true point for the ¼ sec. cor. of secs. 31 and 32.
	N. 89°53' W., on the E. and W. centerline of sec. 31.
	Down the Gila River, course W., by triangulation.
25.10	Right bank of the Gila River, bears N. 65° E. and S. 65° W.; asc. E. slopes.
27.60	Ridge over-looking the Gila River on W. side, bears N. 65° E. and S. 65° W. End of triangulation.
39.90	The center ¼ sec. cor. of sec. 31.
	Thence, by triangulation, topography as estimated.
46.00	Right bank of the Gila River, bears N. and S.
47.50	Left bank of the Gila River, bears N. and S.
60.30	Point for the C-W 1/16 sec. cor. of sec. 31.
	Set the iron post 12 ins. in the ground, mound of stone to top, brass cap mkd.
	$\begin{array}{c} \text{W } 1/16 \\ \text{C} \text{-----} \text{C} \\ \text{S31} \\ 1968 \end{array}$
	from which
	A TV antenna, on a white house, bears N. 17°47' W., 4.94 chs. dist.
	End of triangulation.
61.10	Old track road, bears NE. and SW.
79.43	The ¼ sec. cor. of sec. 31, on the W. bdy. of the Tp.
	Land, rolling and broken. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.
	Subdivision of the SW¼ of Section 31
	From the point for the Standard W 1/16 sec. cor. of sec. 31, on the S. bdy. of the Tp.

Subdivision of Sections T. 5 S., R. 30 E.

CHAINS	
	<p>N. 1°14' W., on the N. and S. centerline of the SW$\frac{1}{4}$ sec. 31.</p>
	<p>Over rolling land, through moderate undergrowth.</p>
11.80	<p>Leave mesa, enter gently rolling land.</p>
20.02	<p>Point for the SW 1/16 sec. cor. of sec. 31, at intersection with the E. and W. centerline of the SW$\frac{1}{4}$, sec. 31.</p>
	<p>Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.</p>
	<p style="text-align: center;">SW 1/16 + S31 1968</p>
26.50	<p>Wash, 15 lks. wide, 2 ft. deep, drains N. 10° W.</p>
35.50	<p>Wash, 25 lks. wide, 3 ft. deep, drains NE.</p>
40.07	<p>The C-W 1/16 sec. cor. of sec. 31.</p>
	<p>From the C-S 1/16 sec. cor. of sec. 31.</p>
	<p>N. 89°53' W., on the E. and W. centerline of the SW$\frac{1}{4}$, sec. 31.</p>
	<p>Over rolling land, through moderate undergrowth.</p>
9.20	<p>Enter mesa, bears SE. and NW.</p>
15.70	<p>Leave mesa, bears NE. and SW.</p>
19.00	<p>Wash, 15 lks. wide, 2 ft. deep, drains N. 10° W.</p>
20.22	<p>The SW 1/16 sec. cor. of sec. 31.</p>
35.60	<p>Wash, 20 lks. wide, 2 ft. deep, drains N. 80° E.</p>
39.79	<p>The point for the S 1/16 sec. cor. of sec. 31, on the W. bdy. of the Tp.</p>
<p>Subdivision of the NW$\frac{1}{4}$ of Section 31</p>	
	<p>From the C-W 1/16 sec. cor. of sec. 31.</p>
	<p>N. 1°17' W., on the N. and S. centerline of the NW$\frac{1}{4}$, sec. 31.</p>
	<p>Over rolling land, through moderate undergrowth.</p>
0.80	<p>Ridge with old track road, bears NE. and SW.</p>
3.60	<p>Enter Corral, bears E. and W.</p>
4.50	<p>Leave Corral, bears E. and W.</p>
7.70	<p>Power line, bears N. 70° E. and S. 70° W.</p>
19.98	<p>Point for the NW 1/16 sec. cor. of sec. 31, at intersection with the E. and W. centerline of the NW$\frac{1}{4}$, sec. 31.</p>

Subdivision of Sections, T. 5 S., R. 30 E.

CHAINS	
	<p>Set the iron post 10 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">NW 1/16 + S31 1968</p>
26.40	Track road, bears E. and W.
31.40	Ridge, bears S. 70° E. and N. 70° W.
39.98	The point for the W 1/16 sec. cor. of secs. 30 and 31.
	<p>From the C-N 1/16 sec. cor. of sec. 31.</p> <p>N. 89°47' W., on the E. and W. centerline of the NW¼, sec. 31.</p> <p>By triangulation, topography as scaled from USGS sheet, Duncan #2 NE., Arizona, scale 1:24,000.</p>
6.50	E. rim of canyon over-looking the Gila River, bears N. and S.; desc. W. slope to river.
11.40	Center of the Gila River, course N. 10° E.; asc. E. slope.
13.10	W. rim of canyon over-looking the Gila River, bears N. 10° E. and S. 10° W., end of triangulation; enter nearly level land.
20.61	The NW 1/16 sec. cor. of sec. 31.
25.80	Old Safford Highway, bears S. 5° E. and N. 5° W.
38.20	Wash, 30 lks. wide, 1 ft. deep, drains N.
39.23	The N 1/16 sec. cor. of sec. 31, on the W. bdy. of the Tp.
	Subdivision of Section 19
	<p>From the ¼ sec. cor. of secs. 19 and 30.</p> <p>N. 0°24' W., on the N. and S. centerline of sec. 19.</p> <p>Over rolling land, through moderate undergrowth.</p>
11.60	Old Safford Highway, bears NE. and SW.
20.02	Point for the C-S 1/16 sec. cor. of sec. 19.
	<p>Set the iron post 8 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T5S R30E C S 1/16 S19 C 1968</p> <p>from which</p> <p style="text-align: center;">A squared 4x4 wooden post, bears West, 30 lks. dist.</p>

Subdivision of Sections, T. 5 S., R. 30 E.

CHAINS	
31.10	Wash, 10 lks. wide, 1 ft. deep, drains S. 30° W.
40.04	Point for the center $\frac{1}{4}$ sec. cor. of sec. 19, at intersection with E. and W. centerline sec. 19; not monumented.
40.80	Graded road, bears E. and W.
44.20	Wash, 10 lks. wide, 2 ft. deep, drains W.
59.40	Wash, 30 lks. wide, 1 ft. deep, drains S. 30° W.
80.06	The $\frac{1}{4}$ sec. cor. of secs. 18 and 19.
	Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.
	From the $\frac{1}{4}$ sec. cor. of secs. 19 and 20. S. 89°54' W., on the E. and W. centerline of sec. 19. Over rolling land, through moderate undergrowth.
6.90	Wash, 60 lks. wide, 2 ft. deep, drains S.
34.80	Old Safford Highway, bears N. and S.
40.06	The Point for the Center $\frac{1}{4}$ sec. cor. of sec. 19.
51.80	Graded road, bears NE. and SW.
64.90	Wash, 20 lks. wide, 1 ft. deep, drains S.
76.90	Old railroad bed, bears S. 60° E. and N. 60° W.
77.79	The $\frac{1}{4}$ sec. cor. of sec. 19, on the W. bdy. of the Tp.
	Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.
Subdivision of Section 7	
	From the $\frac{1}{4}$ sec. cor. of secs. 7 and 18. N. 0°16' E., on the N. and S. centerline of sec. 7. Over rolling land, through moderate undergrowth.
3.50	Ridge, bears E. and W.
11.00	Ridge, bears E. and W.
17.80	Wash, 30 lks. wide, 2 ft. deep, drains W.
26.20	Telegraph line, bears S. 25° E. and N. 25° W.
26.90	Southern Pacific Railroad, bears S. 25° E. and N. 25° W.


Subdivision of Sections, T. 5 S., R. 30 E.

CHAINS	
40.15	Point for the Center $\frac{1}{4}$ sec. cor. of sec. 7, at intersection with the E. and W. centerline of sec. 7.
	Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.
	<p style="text-align: center;">T5S R30E C $\frac{1}{4}$ + S 7 1968</p>
41.00	Ridge, bears N. 80° E. and S. 80° W.
48.00	Ridge, bears E. and W.
59.85	Southern Pacific Railroad, bears N. 30° E. and S. 30° W.
60.04	Point for the C-N $\frac{1}{16}$ sec. cor. of sec. 7.
	Set the iron post 20 ins. in the ground, brass cap mkd.
	<p style="text-align: center;">C N $\frac{1}{16}$ S 7 C 1968</p>
	Raise a mound of stone W. of the cor.
61.20	Telegraph line, bears N. 65° E. and S. 65° W.
65.40	Ridge, bears S. 80° E. and N. 80° W.
66.90	Wash, 5 lks. wide, 4 ft. deep, drains W.
79.93	The point for the $\frac{1}{4}$ sec. cor. of secs. 6 and 7.
	<p>Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creoste bush, cacti and bunch grass.</p>
	From the $\frac{1}{4}$ sec. cor. of secs. 7 and 8.
	S. 89°37' W., on the E. and W. centerline of sec. 7.
	Over rolling land, through moderate undergrowth.
1.00	Ridge, bears NE. and SW.
17.40	Spur, slopes S.
19.76	Point for the C-E $\frac{1}{16}$ sec. cor. of sec. 7; not monument-
	ed.
21.90	Ridge, bears N. 80° E. and W.
39.52	The Center $\frac{1}{4}$ sec. cor. of sec. 7.
50.00	Southern Pacific Railroad, bears S. 25° E. and N. 25° W.
51.20	Telegraph line, bears S. 25° E. and N. 25° W.
59.31	Point for the C-W $\frac{1}{16}$ sec. cor. of sec. 7; not monument-
	ed.

Subdivision of Sections, T. 5 S., R. 30 E.

CHAINS	
72.10	Wash, 5 lks. wide, 4 ft. deep, drains N. 80° W.
77.15	<p>The 1/4 sec. cor. of sec. 7, only, on the W. bdy. of the Tp.</p> <p>Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
Subdivision of the NE 1/4 of Section 7	
<p>From the point for the C-E 1/16 sec. cor. of sec. 7.</p>	
<p>N. 0°19' E., on the N. and S. centerline of the NE 1/4, sec. 7.</p>	
<p>Over rolling land, through moderate undergrowth.</p>	
1.20	Ridge, bears N. 80° E. and S. 80° W.
10.10	Spur, slopes N. 80° W.
14.00	Ridge, bears S. 80° E. and N. 80° W.
19.84	<p>Point for the NE 1/16 sec. cor. of sec. 7, at intersection with E. and W. centerline of the NE 1/4, sec. 7.</p> <p>Set the iron post 12 ins. in the ground, mound of stone to top, brass cap mkd.</p>
<p>NE 1/16 + S 7 1968</p>	
22.70	Wash, 30 lks. wide, 3 ft. deep, drains N. 80° W.
27.60	Spur, slopes S. 80° W.
36.60	Track road, bears E. and W.
39.72	The E 1/16 sec. cor. of secs. 6 and 7.
<p>From the point for the N 1/16 sec. cor. of secs. 7 and 8.</p>	
<p>S. 89°46' W., on the E. and W. centerline of the NE 1/4, sec. 7.</p>	
<p>Over rolling land, through moderate undergrowth.</p>	
1.70	Spur, slopes N. 80° W.
10.00	Wash, 30 lks. wide, 3 ft. deep, drains N. 80° W.
19.77	The NE 1/16 sec. cor. of sec. 7.
22.50	Spur, slopes N.
39.40	Southern Pacific Railroad, bears N. 30° E. and S. 30° W.
39.54	The C-N 1/16 sec. cor. of sec. 7.

Subdivision of Sections, T. 5 S., R. 30 E.

CHAINS	Subdivision of the NW $\frac{1}{4}$ of Section 7
<p>1.30</p> <p>11.40</p> <p>18.82</p>	<p>From the point for the C-W 1/16 sec. cor. of sec. 7.</p> <p>N. 0°13' E., on the N. and S. centerline of the NW$\frac{1}{4}$, sec. 7.</p> <p>Over rolling land, through moderate undergrowth.</p> <p>Ridge, bears E. and W.; desc. NW. slope.</p> <p>Spur, slopes W.; continue desc.</p> <p>Point selected for the witness NW 1/16 sec. cor. of sec. 7.</p> <p>Set the iron post over an "X" chiseled on solid rock, mound of stone to top, brass cap mkd.</p>
<p>19.92</p> <p>26.00</p> <p>39.88</p>	<div style="text-align: center;">  <p>NW 1/16 S 7</p> <p>W C</p> <p>1968</p> </div> <p>Thence, by triangulation, topography as scaled from U.S. C. & G.S. Quadrangle Clifton SE., Arizona, scale 1:24000.</p> <p>Point for the NW 1/16 sec. cor. of sec. 7, at intersection with the E. and W. centerline of the NW$\frac{1}{4}$, sec. 7. This point falls in an unsafe position, impractical to monument.</p> <p>Center of San Francisco River, course SW.; asc. S. slope.</p> <p>The W 1/16 sec. cor. of secs. 6 and 7, and end of triangulation.</p>
<p>2.70</p> <p>19.82</p> <p>24.20</p> <p>37.73</p>	<p>From the C-N 1/16 sec. cor. of sec. 7.</p> <p>S. 89°44' W., on the E. and W centerline of the NW$\frac{1}{4}$, sec. 7.</p> <p>Over rolling land, through moderate undergrowth.</p> <p>By triangulation, topography as scaled from U.S.C. & G.S. Quadrangle Clifton SE., Arizona, scale, 1:24000.</p> <p>Telegraph line, bears N. 65° E. and S. 65° W.</p> <p>True point for the NW 1/16 sec. cor. of sec. 7, from which its witness cor., bears S. 0°13' W., 110 lks. dist.</p> <p>Center of San Francisco River, course SW.; asc. E. slope</p> <p>The N 1/16 sec. cor. of sec. 7, on the W. bdy. of the Tp., and end of triangulation.</p>
	<p style="text-align: center;">General Description</p> <hr/> <p>Township 5 South, Range 30 East is located southeast of Clifton, Arizona with Section 6 being in the city limits Three way, Arizona is located in Section 35.</p>

Township 5 South, Range 30 East
Gila and Salt River Meridian, Arizona

CHAINS

The elevation ranges from 3,850 ft. above sea level in the southeast portion to 4,400 ft. in the northeast portion of the Township.

U. S. Highway No. 666 and Highway No. 75, come together in the south part of Section 35, at Three Way, Arizona. Highway No. 666 traverses northwest and leaves the Township in Section 6. Southern Pacific Railroad, enters the Township in Section 34, traverses northwest through the west portion and leaves the Township in Section 6. The Gila River enters the Township in Section 34, meanders along the south boundary and leaves in Section 30. The San Francisco River enters the Township in Section 6, meanders southwest and leaves in Section 7. There are numerous graded roads throughout the Township.

The soil is mostly rocky and gravelly loam; the vegetation consists of creosote bush, cacti and bunch grass. There is widely scattered juniper in parts of the Township.

Clifton cemetery is in Section 4; there is a picnic area in Section 5, a Drive-in Theater in Section 35. There is a private resort area being developed in the center southwest portion of Section 10.

The land also affords limited grazing of livestock. The drainage is generally southwest.

CERTIFICATE OF SURVEY

(I) ~~(We)~~ Gary T. Oviatt, HEREBY
 CERTIFY upon honor that, in pursuance of special instructions bearing date of the 4th day
 of March, 1968, (I) ~~(We)~~ have dependently resurveyed the south boundary,
 (First Standard Parallel South), the south 5 miles of the west boundary (with
 reestablishment and establishment of certain corners along the east boundary of
 Township 5 South, Range 29 East), the east 5 miles of the north boundary (with
 reestablishment of certain corners along the south boundary of Township 4 South,
 Range 30 East) and portions of the subdivisional lines and surveyed subdivisions
 in sections 4,7,10,19,31,33 and 34, Township 5 South, Range 30 East,
 of the Gila and Salt River Meridian, in the State of Arizona, which
 are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my)
~~(our)~~ direction; and that said survey has been made in strict conformity with said special instruc-
 tions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in
 specific manner described in the foregoing field notes.

October 22, 1969

(Date)

Gary T. Oviatt

(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL

Date SEP 4 1970

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the dependent resurvey of the south boundary, (First Standard
 Parallel South), the south 5 miles of the west boundary (with reestablishment and
 establishment of certain corners along the east boundary of Township 5 South, Range
 29 East), the east 5 miles of the north boundary (with reestablishment of certain
 corners along the south boundary of Township 4 South, Range 30 East), and a portion
 of the subdivisional lines, and survey of subdivisions in sections 4,7,10,19,31,
 33 and 34, Township 5 South, Range 30 East, G&SRM, Arizona.

executed by Gary T. Oviatt,

having been critically examined and found correct, are hereby approved.

JUL 19 1971

(Date)

Clark F. Sumner

(Chief, Division of Cadastral Survey)

~~CERTIFICATE OF TRANSCRIPT~~

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in
 _____ is a true copy of the original field notes.

(Date)

(Chief, Division of Cadastral Survey) GPO 849-706