

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

DEPENDENT RESURVEY

OF A

PORTION OF THE EAST BOUNDARY

AND

SUBDIVISIONAL LINES

AND

SURVEY OF SUBDIVISIONS IN CERTAIN SECTIONS,

TOWNSHIP 13 SOUTH, RANGE 30 EAST

Of the Gila and Salt River Meridian,

In the State of Arizona

EXECUTED BY

Gary T. Oviatt,

Cadastral Surveyor

Under special instructions dated November 20, 1968, which provided for the surveys
included under Group Number 465, approved November 21, 1968,
and assignment instructions dated November 21, 1968.

Survey commenced November 29, 1968

Survey completed January 15, 1969

BOOK 4923
INDEX DIAGRAM

Township 13 South, Range 30 East,

6 39	39 5 38	34 4 33	29 3 28	23 2 22	14 1 13
7 37	38 8 36	33 9 32	28 10 28	21 11 21	12 12 2 11
18	17	32 16 31	27 15 26	20 14 19	10 13 9 1
19 36	20	30 21 30	25 22 24	18 23 17	8 24 6
30 34	35 29	28	27	16 26 15	4 25
31	32	33	34	15 35	3 36

Subdivision of Sec. 9 -- Page 40
 " " " 10 -- Page 41
 " " " 11 -- Page 41
 " " " 12 -- Page 43
 " " " 13 -- Page 48
 " " " 14 -- Page 49

Subdivision of Sec. 15 -- Page 50
 " " " 21 -- Page 51
 " " " 22 -- Page 52
 " " " 24 -- Page 53
 " " " 26 -- Page 56
 " " " 35 -- Page 60

Township 13 South, Range 30 East
Gila and Salt River Meridian, Arizona

CHAINS

The boundaries and subdivisional lines were surveyed in 1883 by R. C. Powers. The north boundary was retraced in 1884 by L. Wolfley. The south boundary was resurveyed in 1913 by J. F. Hesse. The east boundary was resurveyed in 1952 by C. E. Bilbray. The west and north boundaries were resurveyed concurrently under this same Group No. by G. Oviatt.

The following field notes are those of a dependent resurvey of a portion of the east boundary and subdivisional lines, designed to restore the corners in their true original location according to the best available evidence, and survey of subdivisions in certain sections, Township 13 South, Range 30 East, Gila and Salt River Meridian, Arizona.

Only the true line bearings and horizontal distances for the surveyed lines are given in these notes. Unless described, each corner was monumented with a standard iron post 30 inches long, 2½ inches in diameter, flanged at the base and with a brass cap riveted to the top.

This resurvey was executed in accordance with the Specifications as set forth in the Manual of Surveying Instructions, 1947, and Special Instructions dated November 20, 1968.

The geographic position of the southeast corner of the township as determined by traverse from U.S.C. & G.S. triangulation station "SELLERS" is: Latitude 32°14'59.2" North and Longitude 109°13'37.8" West.

The mean magnetic declination was found to be: 13½° East.

Dependent Resurvey, Portion East Boundary
Township 13 South, Range 30 East

Reestablishment of the Survey Executed
by C. E. Bilbray in 1952

From the ¼ sec. cor. of secs. 13 and 18, monumented by an iron post 2½ ins. diam., projecting 9 ins. above the ground, brass cap mkd.

¼
S13 | S18
1952

N. 0°18' W., bet. secs. 13 and 18.

Over nearly level land, through scattered undergrowth.

- 26.10 Left bank of San Simon River, bears S. 10° E. and N. 10° W.
- 30.00 Center of San Simon River, drains N. 10° W.
- 36.30 Right bank of San Simon River, bears S. 5° E. and N. 5° W.

Dep. Res., Portion East Boundary, T. 13 S., R. 30 E.

CHAINS

40.27 Point for the cor. of secs. 7, 12, 13 and 18, at proportionate dist.; there is no remaining evidence of the orig. cor.

Set the iron post 24 ins. in the ground, brass cap mkd.

T13S
R30E R31E
S12 | S 7
S13 | S18
1969

The cor. is located on the right bank of the San Simon River, bears S. 5° E. and N. 5° W.

Land, nearly level.
Soil, sandy clay loam.
No timber; undergrowth, cat claw and mesquite.

N. 0°18' W., bet. secs. 7 and 12.

Over nearly level land, through moderate undergrowth.

2.70 Wash, 80 lks. wide, 8 ft. walls, drains NW.

20.13 Point for the S 1/16 sec. cor. of secs. 7 and 12, at proportionate dist.

Set the iron post 24 ins. in the ground, brass cap mkd.

T13S
R30E R31E
S 1/16
S12 | S 7
1969

Set a wooden post, 4 ins. square, 3 ft. long, alongside the iron post.

33.60 Wash, 25 lks. wide, 5 ft. walls, drains S. 70° W.

40.26 The 1/4 sec. cor. of secs. 7 and 12, monumented by an iron post 2 1/2 ins. diam., projecting 10 ins. above the ground, brass cap mkd.

1/4
S12 | S 7
1952

N. 0°17' W., beginning new measurement.

Over nearly level land.

9.50 Wash, 30 lks. wide, 3 ft. deep, drains SW.

20.10 Point for the N 1/16 sec. cor. of secs. 7 and 12, at proportionate dist.

Set the iron post 24 ins. in the ground, brass cap mkd.

Dep. Res., Portion East Boundary, T. 13 S., R. 30 E.

CHAINS

T13S
R30E R31E
N 1/16
S12 | S 7
1969

Set a wooden post, 4 ins. square, 3 ft. long, alongside the iron post.

40.21 The cor. of secs. 1, 6, 7 and 12, monumented by an iron post 2½ ins. diam., projecting 5 ins. above the ground, brass cap mkd.

T13S
R30E R31E
S 1 | S 6
S12 | S 7
1952

The cor. is located at a cor. of fences bearing N., S. 60° E. and N. 89°22' W.

Land, nearly level.
Soil, sandy clay loam.
No timber; undergrowth, creosote bush and catclaw.

Dependent Resurvey, Portion Subdivisional Lines
Township 13 South, Range 30 East

Reestablishment of the Survey Executed
by R. C. Powers in 1883

From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., monumented by an iron post, 3 ins. diam., located under an earth dyke bearing E. and W. (recently uncovered), brass cap mkd.

T13S
R30E S35 | S36
S 2 | S 1
T14S
1913

from which

A fence cor., bears N. 45°10' E., 68 lks. dist.; fences extending E. and N. 1°48' W.

An iron post, set 26 ins. in the ground, for a reference monument, bears N. 45° W., 100 lks. dist., with brass cap mkd. T13S R30E S35 RM 66FT 1969 and an arrow pointing to the cor. Set a wooden post 2 x 4 ins. squared, 3 ft. long alongside.

N. 1°48' W., bet. secs. 35 and 36.

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS		
	<p>Over nearly level land, through moderate undergrowth. Along the W. side of a N. and S. fence.</p>	
40.02	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 35 and 36, at proportionate dist.; there is no remaining evidence of the orig. cor.</p>	
	<p>Set the iron post 24 ins. in the ground, brass cap mkd.</p>	
	<p style="text-align: center;">T13S R30E $\frac{1}{4}$ S35 S36 1969</p>	
	<p>Set a wooden post, 4 ins. square, 4 ft. long, alongside the iron post.</p>	
	<p>The cor. is located 51 lks. W. of a N. and S. fence.</p>	
40.20	<p>E. end of a newly constructed fence bearing N. $89^{\circ}47'$ W.</p>	
80.01	<p>Powerline, bears N. 89° W. and bears S. 89° E., 47 lks. dist. to cor. pole, thence S. $1^{\circ}48'$ E. and NE., 92 lks., thence E.</p>	
80.04	<p>The orig. cor. of secs. 25, 26, 35 and 36, monumented by the remains of an old weathered redwood stake, 1 x 1 ins., 8 ins. long, with pieces of other stakes and old wire alongside. This monument was located 18 ins. below the surface of the ground on the S. side of a graded road bearing S. 89° E. and N. 89° W. This point was pointed out by a local land owner and has long been recognized as the cor. position by residents of San Simon, Ariz. and by private surveyors; not remonumented.</p>	
	<p>from which</p>	
	<p style="padding-left: 40px;">A fence cor. bears N. $49^{\circ}15'$ E., 65 lks. dist.; fences extending N. $0^{\circ}17'$ E., E. and S. $1^{\circ}48'$ E.</p>	
	<p style="padding-left: 40px;">The SE. cor. of Homewood Cemetary, bears N. 45° W., 64.3 lks. dist.</p>	
	<p style="padding-left: 40px;">USC&GS triangulation station "SELLERS", bears S. $89^{\circ}11'$ E., 82.04 chs. dist., monumented by a standard disk, set in a concrete block, projecting 5 ins. above the ground, mkd. SELLERS 1960.</p>	
	<p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, creosote and catclaw.</p>	
	<p>N. $0^{\circ}21'$ E., bet. secs. 25 and 26.</p>	
	<p>Over nearly level land, through low undergrowth.</p>	
0.12	<p>Graded road, bears S. 89° E. and N. 89° W.</p>	
10.05	<p>Point for the S-S $\frac{1}{64}$ sec. cor. of secs. 25 and 26, at proportionate dist.</p>	

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS	
	<p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E S-S 1/64 S26 S25 1969</p> <p>from which</p> <p style="text-align: center;">The NE. cor. of Homewood Cemetary, bears S. 80°38' W., 46.1 lks. dist.</p> <p>Set a wooden post, 4 ins. square, 3 ft. long, alongside the iron post.</p> <p>The cor. is located 44 lks. West of a N. and S. fence.</p>
20.10	<p>Point for the S 1/16 sec. cor. of secs. 25 and 26, at proportionate dist.</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E S 1/16 S26 S25 1969</p> <p>Raise a mound of stone W. of the cor.</p> <p>The cor. is located 45.5 lks. West of a N. and S. fence.</p>
23.10	<p>Underground telephone line, bears S. 58° E. and N. 58° W.</p>
26.10	<p>Powerline, bears S. 62° E. and N. 62° W.</p>
27.60	<p>Right-of-way fence, bears N. 62° W. and bears S. 62° E., 44 lks. to fence cor.; fences bear S. 62° E., S. 0°17' W. and N. 62° W.</p>
29.30	<p>Center of east bound lanes of Interstate 10, bears S. 62° E. and N. 62° W.</p>
31.15	<p>Center of west bound lanes of Interstate 10, bears S. 62° E. and N. 62° W.</p>
31.70	<p>San Simon exit, bears S. 55° E. and N. 55° W.</p>
32.80	<p>Right-of-way fence, bears N. 62° W. and bears S. 62° E., 44 lks. dist. to fence cor.; fences bear N. 0°17' E., S. 62° E. and N. 62° W.</p>
40.20	<p>The 1/4 sec. cor. of secs. 25 and 26, monumented by a steel bar, 1/2 in. diam., projecting 3 ins. above the ground. This bar was set by a registered surveyor and is accepted as the best available evidence of the orig. cor. position.</p> <p>At the corner point</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E 1/4 S26 S25 1968</p>

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS

Bury the steel bar and set a wooden post, 2 x 4 ins. square, 3 ft. long, alongside the iron post.

The cor. is located 44 lks. West of a N. and S. fence.

N. 0°21' E., beginning new measurement.

- 2.30 Right-of-way fence, bears S. 55° E. for 44 lks. dist. to fence cor.; fences bear S. 55° E., S. 0°17' W. and N. 55° W.
- 4.00 San Simon exit, bears S. 55° E. and N. 55° W., curving SW.
- 5.40 Right-of-way fence, bears S. 55° E. and N. 55° W.
- 6.90 State Highway No. 86, bears N. 75° W. and S. 75° E., curving SE.
- 9.50 Telegraph line, bears S. 75° E. and N. 75° W.
- 10.20 Southern Pacific Railroad, bears S. 75° E. and N. 75° W.
- 10.35 Railroad siding, bears S. 75° E. and N. 75° W.
- 10.90 Telephone line, bears S. 75° E. and N. 75° W.
- 11.10 Graded road, bears S. 75° E. and N. 75° W.
- 11.90 Right-of-way fence, bears S. 75° E. and N. 75° W.
- 12.20 Graded road, bears S. 75° E. and N. 75° W. and entrance road to farm house bears N., thence along W. side of road.
- 12.90 Power line, bears S. 75° E. and N. 75° W.
- 20.20 Power line, bears E. and W. and fence bears N. 0°21' E.; end of entrance road; enter farm land.
- 39.90 The cor. of secs. 23, 24, 25 and 26, monumented by a redwood stake, 3 x 3 ins., located 10 ins. below the surface of the ground and 2.3 ft. south of a fence cor. of fences bearing N. 0°19' E., N. 89°46' E. and S. 0°21' W. This stake has long been recognized as the cor. by local residents and private surveyors. I accept this as the best remaining evidence of the original cor. position; not remonumented.

Land, nearly level.
Soil, sandy clay loam.
No timber; undergrowth, grass and cat claw.

From the point for the cor. of secs. 19, 24, 25 and 30, as determined from two reference monuments.

An iron post 2½ ins. diam., projecting 4 ins. above the ground, bears N. 45° E., 75 lks. dist., mkd. T13S R30E S19 RM 1952 and an arrow pointing to the true point.

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS	
	<p>An iron post $2\frac{1}{2}$ ins. diam., projecting 4 ins. above the ground, bears S. 45° W., 75 lks. dist., mkd. T13S R30E S25 RM 1952 and an arrow pointing to the true point.</p> <p>S. $89^\circ 47'$ W., bet. secs. 24 and 25.</p> <p>Over nearly level land.</p>
0.10	Center of graded road bearing S. $0^\circ 25'$ E. and N. $0^\circ 25'$ W.
0.50	Power line, bears S. $0^\circ 25'$ E. and N. $0^\circ 25'$ W.
0.60	Fence cor., bears North, 45 lks. dist.; fences bear S. $0^\circ 25'$ E., W. and N. $0^\circ 25'$ W.; enter farm land.
20.50	Fence cor., bears North, 45 lks.; fences bear N. and E.
21.00	Track road, bears SE., 100 lks., thence S. and bears NE., 30 lks., thence W.
21.90	Fence cor. of fences bearing S. 80° E., curving S. and N. 80° W., curving W.; thence along E-W fence.
40.67	<p>The $\frac{1}{4}$ sec. cor. of secs. 24 and 25, monumented by a steel bar, $\frac{1}{2}$ in. diam., located 6 ins. below the surface of the ground. This bar was set by a registered surveyor and has long been recognized as the cor. by local residents, and is accepted as the best available evidence of the orig. cor. position.</p> <p>At the corner point</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T13S R30E</p> <p>$\frac{1}{4}$ <u>S24</u></p> <p>S25</p> <p>1968</p> </div> <p>Bury the steel bar and set a wooden post, 2 x 4 ins. squared, 4 ft. long, alongside the iron post.</p> <p>The cor. is located underneath an E. and W. fence and underneath a power line bearing N., E., S. and W.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. $89^\circ 46'$ W., beginning new measurement.</p> <p>Continue over farm land.</p>
0.07	Fence cor.; fences bear N. $89^\circ 46'$ E., S. and S. $89^\circ 46'$ W.
0.40	Fence cor.; fences bear N., N. $89^\circ 46'$ E. and S. $89^\circ 46'$ W.
0.60	Track road, bears N. and S.
19.50	Fence cor.; fences bear N. $89^\circ 46'$ E., S. $89^\circ 46'$ W. and N. $0^\circ 10'$ W.

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS		
20.32	<p>Point for the W 1/16 sec. cor. of secs. 24 and 25, at proportionate dist.</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E W 1/16 $\frac{S24}{S25}$ 1968</p> <p>from which</p> <p style="text-align: center;">A water well, bears N. 52°40' W., 60 lks. dist.</p> <p>The cor. is located underneath an E. and W. fence.</p>	
20.90	<p>End of power line, line bears E.</p>	
40.65	<p>The cor. of secs. 23, 24, 25 and 26.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, grass and tumbleweed.</p>	
<hr/>		
20.27	<p>N. 0°19' E., bet. secs. 23 and 24.</p> <p>Over nearly level land, along a N. and S. fence, through farm land.</p> <p>Point for the S 1/16 sec. cor. of secs. 23 and 24, at proportionate dist.; not monumented.</p>	
40.37	<p>Track road, bears E. and W.</p>	
40.54	<p>The $\frac{1}{4}$ sec. cor. of secs. 23 and 24, monumented by an open pipe, $\frac{3}{4}$ ins. diam., found 4 ins. below the surface of the ground. This pipe was set by a registered surveyor and has long been recognized as the cor. by local residents and is accepted as the best available evidence of the orig. cor. position.</p> <p>At the corner point</p> <p>Set the iron post 24 ins. in the ground, over the open pipe, brass cap mkd.</p> <p style="text-align: center;">T13S R30E $\frac{1}{4}$ S23 S24 1969</p> <p>from which</p> <p style="text-align: center;">A fence cor., bears West, 4 lks. dist.; fences bear N. 0°19' E., S. 0°19' W. and W.</p> <p>Set a wooden post, 4 ins. square, 4 ft. long, alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/>	

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS					
	<p>N. 0°19' E., beginning new measurement.</p> <p>Over nearly level land.</p> <p>20.00 Leave farm land, bears E. and S.</p> <p>40.04 Fence cor.; fences bear N. 0°19' E., S. 89°44' E. and S. 0°19' W.</p> <p>40.54 The cor. of secs. 13, 14, 23 and 24, monumented by an old redwood stake 2 x 2 ins., found 3 ins. below the surface of the ground. This stake has long been recognized as the cor. by local residents and is accepted as the best remaining evidence of the orig. cor. position.</p> <p>At the corner point</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T13S R30E</p> <table border="1" style="margin: auto;"> <tr> <td>S14</td> <td>S13</td> </tr> <tr> <td>S23</td> <td>S24</td> </tr> </table> <p>1969</p> </div> <p>from which</p> <p style="padding-left: 40px;">The remains of an old windmill, bears N. 44° 10' W., 205 lks. dist.</p> <p>The cor. is located underneath a N. and S. fence.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, grass and scattered cat claw.</p>	S14	S13	S23	S24
S14	S13				
S23	S24				
	<p>The cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp., marked by an open pipe, 1½ ins. diam., 15 ins. below the surface of the ground, and located on the west side of a graded road bearing E. and S. 0°25' E. An iron post, 2½ ins. diam., 30 ins. long, was found lying horizontally, 4 ins. below the surface of the ground.</p> <p>At the corner point</p> <p>Reset the iron post 15 ins. below the surface and alongside the open pipe, brass cap mkd.</p> <div style="text-align: center;"> <p>T13S</p> <p>R30E R31E</p> <table border="1" style="margin: auto;"> <tr> <td>S13</td> <td>S18</td> </tr> <tr> <td>S24</td> <td>S19</td> </tr> </table> <p>1952</p> <p>1968</p> </div> <p>from which</p> <p style="padding-left: 40px;">An iron post, set 24 ins. in the ground, for a reference monument, bears S. 45° W., 50 lks. dist., with brass cap mkd. T13S R30E S24 RM 33 FT 1968 and an arrow pointing to the cor.</p>	S13	S18	S24	S19
S13	S18				
S24	S19				

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS		
	<p>A metal staple in a telephone pole No. 6470, bears S. 89° E., 103 lks. dist.</p> <p>N. 89°41' W., bet. secs. 13 and 24.</p> <p>Over nearly level land, through moderate undergrowth.</p>	
0.40	Power line, bears N. and S.	
5.90	Track road, bears S. 80° E. and N. 80° W., curving W., thence along the S. side of road.	
39.50	Fence, bears N. 0°35' E. and S. 0°10' W.	
40.13	Point for the ¼ sec. cor. of secs. 13 and 24, at proportionate dist.; there is no remaining evidence of the orig. cor.	
	Set the iron post 24 ins. in the ground, brass cap mkd.	
	<p>T13S R30E</p> <p>¼ $\frac{S13}{S24}$</p> <p>1969</p>	
	from which	
	<p>A fence cor., bears S. 50° E., 78.3 lks. dist.; fences bear N. 0°35' E., S. 0°10' W. and N. 89° 44' W.</p> <p>The cor. is located 36 lks. South of a telephone line, bearing E. and W.</p> <p>Thence along the S. side of a track road bearing E. and W.</p>	
80.26	The cor. of secs. 13, 14, 23 and 24.	
	<p>Land, nearly level.</p> <p>Soil, sandy clay loam.</p> <p>No timber; undergrowth, cat claw first half and grass second half.</p>	
	N. 0°26' W., bet. secs. 13 and 14.	
	Over nearly level land, through scattered undergrowth.	
0.45	Telephone line, bears E. and W.	
0.47	Fence cor.; fences bear S. 0°19' W. and W.	
34.50	Underground gasline under construction, bears N. 89°40' E. and S. 89°40' W.	
40.32	Point for the ¼ sec. cor. of secs. 13 and 14, at proportionate dist.; there is no remaining evidence of the orig. cor.; not monumented.	
	from which	
	<p>A fence cor., bears S. 64° E., 43 lks. dist.; fences bear N. 0°45' E. and E.</p>	

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS

- 59.78 Fence, bears S. 89°40' E. and N. 89°40' W.
- 60.48 Point for the N 1/16 sec. cor. of secs. 13 and 14, at proportionate dist.
- Set the iron post 24 ins. in the ground, brass cap mkd.
- T13S R30E
N 1/16
S14|S13
1969
- from which
- A fence cor., bears S. 48°15' E., 103 lks. dist.;
fences bear S. 0°45' W. and N. 89°40' W.
- Set a wooden post, 4 ins. square, 3½ ft. long, alongside the iron post.
- 80.64 The cor. of secs. 11, 12, 13 and 14, as determined from a broken wooden stake, dimly mkd., 2x2x24 ins., set 14 ins. in the ground, originally set in a pit 5½ ft. dist. SE. of the cor.
- At the cor. point
- Set the iron post 22 ins. in the ground, brass cap mkd.
- T13S R30E
S11|S12
S14|S13
1968
- Set a wooden post, 4 ins. square, 4 ft. long, and the remains of the wooden stake, alongside the iron post.
- Land, nearly level.
Soil, sandy clay loam.
No timber; undergrowth, creosote bush and cat claw.
-
- From the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp.
- N. 89°35' W., bet. secs. 12 and 13.
- Over nearly level land, through wash area.
- 0.30 Right bank of San Simon River, bears S. 5° E. and N. 5° W.
- 1.40 Center of San Simon River, drains N. 30° W.
- 2.80 Left bank of San Simon River, bears S. 10° E. and N. 30° W.; enter moderate undergrowth.
- 20.08 Point for the E 1/16 sec. cor. of secs. 12 and 13, at proportionate dist.; not monumented.
- 38.00 Fence, bears S. 0°35' W. and N. 0°35' E., 33 lks. dist. to cor. of fences bearing S. 0°35' W. and S. 89°40' W.

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS	
40.17	Point for the $\frac{1}{4}$ sec. cor. of secs. 12 and 13, at proportionate dist.; there is no remaining evidence of the orig. cor.; not monumented.
59.20	Fence cor., bears North, 8 lks. dist.; fences bear N. $89^{\circ} 40'$ E. and N. 2° W.
80.34	The cor. of secs. 11, 12, 13 and 14. Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, creosote bush and cat claw.
20.15	N. $0^{\circ}18'$ E., bet. secs. 11 and 12. Over nearly level land; through moderate undergrowth. Point for the S $\frac{1}{16}$ sec. cor. of secs. 11 and 12, at proportionate dist. Set the iron post 22 ins. in the ground, brass cap mkd. T13S R30E S $\frac{1}{16}$ S11 S12 1968 Set a wooden post, 4 ins. square, 3 ft. long, alongside the iron post.
40.31	Point for the $\frac{1}{4}$ sec. cor. of secs. 11 and 12, at proportionate dist.; there is no remaining evidence of the orig. cor. Set the iron post 22 ins. in the ground, brass cap mkd. T13S R30E $\frac{1}{4}$ S11 S12 1968 from which A fence cor., bears S. $78^{\circ}06'$ E., 135 lks. dist.; fences bear N. $0^{\circ}18'$ E. and E. Set a wooden post, 4 ins. square, 3 ft. long, alongside the iron post.
60.46	Point for the N $\frac{1}{16}$ sec. cor. of secs. 11 and 12, at proportionate dist. Set the iron post 22 ins. in the ground, brass cap mkd. T13S R30E N $\frac{1}{16}$ S11 S12 1968 Set a wooden post, 4 ins. square, 6 ft. long, alongside the iron post.

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS	
<p>80.44</p> <p>80.62</p>	<p>The cor. is located 130 lks. West of a N. and S. fence.</p> <p>Fence, bears E. and W.</p> <p>Point for the cor. of secs. 1, 2, 11 and 12, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E $\frac{S\ 2}{S11} \frac{S\ 1}{S12}$ 1968</p> <p>from which</p> <p style="padding-left: 40px;">A fence cor., bears S. 81°15' E., 129 lks. dist.; fences bear E., S. 0°18' E.</p> <p>Set a wooden post, 4 ins. diam., 3 ft. long, alongside the iron post.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, creosote bush and cat claw.</p>
<p>19.86</p> <p>39.73</p>	<p>From the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp.</p> <p>N. 89°27' W., bet. secs. 1 and 12.</p> <p>Over nearly level land, through moderate undergrowth, along an E. and W. fence.</p> <p>Point for the E 1/16 sec. cor. of secs. 1 and 12, at proportionate dist.</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E E 1/16 $\frac{S\ 1}{S12}$ 1969</p> <p>Set a wooden post, 2 x 4 ins. squared, 3 ft. long, alongside the iron post.</p> <p>The cor. is located 3 lks. North of an E. and W. fence.</p> <p>Point for the 1/4 sec. cor. of secs. 1 and 12, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E $\frac{1}{4} \frac{S\ 1}{S12}$ 1969</p>

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS	
	<p>Set a wooden post, 2 x 4 ins. squared, 3½ ft. long, alongside the iron post.</p> <p>The cor. is located 6 lks. North of an E. and W. fence.</p>
59.59	<p>Point for the W 1/16 sec. cor. of secs. 1 and 12, at proportionate dist.</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p>
	<p style="text-align: center;">T13S R30E W 1/16 $\frac{S 1}{S 12}$ 1969</p>
	<p>Set a wooden post, 2 x 4 ins. squared, 3 ft. long, alongside the iron post.</p> <p>The cor. is located underneath an irregular E. and W. fence.</p>
61.00	<p>Right bank of San Simon River, bears N. and S.</p>
63.60	<p>Left bank of San Simon River, bears N. and S.</p>
78.40	<p>Fence, bears SE. and NW.</p>
79.46	<p>The cor. of secs. 1, 2, 11 and 12.</p>
	<p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, creosote bush and cat claw.</p>
	<p>N. 0°34' W., bet. secs. 1 and 2.</p>
	<p>Over nearly level land, through scattered undergrowth.</p>
4.20	<p>Track road, bears SE. and NW.</p>
4.80	<p>Fence, bears SE. and NW.</p>
17.40	<p>Wash, 10 lks. wide, 4 ft. walls, drains E.</p>
29.20	<p>Left bank of San Simon River, bears SE. and NW.</p>
30.80	<p>Right bank of San Simon River, bears SE. and NW.</p>
40.31	<p>Point for the ½ sec. cor. of secs. 1 and 2, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p>
	<p style="text-align: center;">T13S R30E $\frac{1}{2}$ S 2 S 1 1969</p>
	<p>Set a wooden post, 4 ins. square, 3 ft. long, alongside the iron post.</p>

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS	
75.60	Wash, 15 lks. wide, 2 ft. deep, drains SW.
80.48	<p>The cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the Tp., monumented by an iron post 2½ ins. diam., as described in the field notes of the concurrent resurvey of T. 12 S., R. 30 E., under this same group.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, creosote bush and cat claw.</p>
<p>From the cor. of secs. 34 and 35 only, on the S. bdy. of the Tp., monumented by an iron post 3 ins. diam., projecting 7 ins. above the ground, brass cap mkd.</p>	
<p style="text-align: center;"> T13S R30E $\frac{S34}{S3}$ $\frac{S35}{S2}$ T14S 1913 </p>	
<p>N. 0°29' W., bet. secs. 34 and 35.</p>	
<p>Over nearly level land, through moderate undergrowth, along the W. side of a track road bearing N. and S.</p>	
0.50	Power line, bears E. and W.
40.61	Point for the ¼ sec. cor. of secs. 34 and 35, at proportionate dist.; there is no remaining evidence of the orig. cor.; not monumented.
81.22	<p>The cor. of secs. 26, 27, 34 and 35, monumented by a water pipe 1½ ins. diam., projecting 2 ins. above the ground with an old wood stake alongside. This pipe has long been recognized as the cor. by local land owners and is accepted as the best available evidence of the orig. cor. position; not remonumented.</p>
<p>from which</p>	
<p style="padding-left: 40px;">The NE. cor. of VORTEX STATION, bears N. 8°07' W., 25.66 chs. dist.</p>	
<p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, creosote bush and cat claw.</p>	
<p>From the cor. of secs. 25, 26, 35 and 36.</p>	
<p>N. 89°15' W., bet. secs. 26 and 35.</p>	
<p>Over nearly level land, along the S. side of a graded road bearing S. 89°15' E., and N. 89°15' W.</p>	
4.94	Point for the E-E-E 1/256 sec. cor. of secs. 26 and 35, at proportionate dist.

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS		
	<p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">S26 E-E-E 1/256 S35 1968</p> <p>from which</p> <p style="padding-left: 40px;">The SW. cor. of Homewood Cemetary, bears N. 1°41' E., 46 lks. dist.</p> <p>Raise a mound of stone N. of the cor.</p>	
9.88	Point for the E-E 1/64 sec. cor. of secs. 26 and 35, at proportionate dist.; not monumented.	
19.76	Point for the E 1/16 sec. cor. of secs. 26 and 35, at proportionate dist.	
	<p>Set the iron post 10 ins. below the surface of the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E E 1/16 $\frac{S26}{S35}$ 1968</p> <p>from which</p> <p style="padding-left: 40px;">An iron post, set 24 ins. in the ground, for a reference monument, bears S. 45° E., 30.3 lks. dist., mkd. T13SR30E S35 RM 20FT 1968 and an arrow pointing to the cor.</p> <p style="padding-left: 40px;">An iron post, set 24 ins. in the ground, for a reference monument, bears S. 45° W., 30.3 lks. dist., mkd. T13SR30E S35 RM 20 FT 1968 and an arrow pointing to the cor.</p>	
39.52	Point for the 1/2 sec. cor. of secs. 26 and 35, at proportionate dist.; there is no remaining evidence of the original cor.; not monumented.	
78.30	Junction of roads, bearing N.; S. 89°15' E., and S.	
79.04	The cor. of secs. 26, 27, 34 and 35.	
	<p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, creosote bush and cat claw.</p>	
	<p>N. 0°03' E., bet. secs. 26 and 27.</p> <p>Over nearly level land, through moderate undergrowth, along the W. side of a track road bearing N. and S.</p>	
25.40	Track road ends; thence along the E. side of a graded road bearing N. and S.	

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS	
40.37	Point for the $\frac{1}{2}$ sec. cor. of secs. 26 and 27, at proportionate dist.; there is no remaining evidence of the orig. cor.; not monumented.
	from which
	U.S.C.&G.S. Triangulation station "ADOBE", bears N. $0^{\circ}47'$ W., 262 lks. dist., monumented by a standard disk, set in a concrete block, 10 ins. square, projecting 3 ins. above the ground, mkd. ADOBE 1960.
	Adobe house, 20 x 25 ft., bears N. $68^{\circ}49'$ W., 179 lks. dist.
56.50	Underground telephone cable, bears S. 75° E. and N. 75° W.
62.00	Power line, bears S. 75° E. and N. 75° W.
62.20	Right-of-way fence, bears S. 75° E. and N. 75° W.
63.70	Center of east bound lanes of Interstate 10, bears S. 75° E. and N. 75° W.
65.40	Center of west bound lanes of Interstate 10, bears S. 75° E. and N. 75° W.
66.40	Right-of-way fence, bears S. 75° E. and N. 75° W.
67.40	State Highway 86, bears S. 75° E. and N. 75° W.
69.90	Telegraph line, bears S. 75° E. and N. 75° W.
70.55	Southern Pacific Railroad, bears S. 75° E. and N. 75° W.
71.00	Graded road, bears S. 75° E. and N. 75° W.
71.25	Telephone line, bears S. 75° E. and N. 75° W.
72.15	Right-of-way fence, bears S. 75° E. and N. 75° W.
72.60	Graded road, bears N. 75° W. and bears S. 75° E., for 38 lks. to an intersection of roads bearing N., S. 75° E. and N. 75° W.
73.30	Power line, bears S. 75° E. and N. 75° W.
80.74	The cor. of secs. 22, 23, 26 and 27, monumented by an open pipe, $\frac{3}{4}$ ins. diam., 2 ins. below the surface of the ground. This cor. was set by a registered surveyor and has long been recognized as the cor. by local residents and is accepted as the best available evidence of the orig. cor. position; not remonumented.
	Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, scattered cat claw.
	From the cor. of secs. 23, 24, 25 and 26.

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS	
	<p>N. 88°47' W., bet. secs. 23 and 26.</p>
	<p>Over nearly level land, through open field.</p>
38.60	<p>W. edge of cultivated field, bears N.; enter moderate undergrowth.</p>
39.30	<p>Irrigation canal, bears N. and S.</p>
39.72	<p>The $\frac{1}{4}$ sec. cor. of secs. 23 and 26, monumented by an open pipe, $\frac{3}{4}$ ins. diam., 2 ins. below the surface of the ground. This cor. was set by a registered surveyor and has long been recognized as the cor. by local residents and is accepted as the best available evidence of the orig. cor. position; not remonumented.</p>
	<hr/> <p>N. 88°47' W., beginning new measurement.</p>
31.40	<p>Track road, bears N. 20° E. for 100 lks., thence bears N. 70° E.; and bears S. 20° W. for 200 lks., thence bears S. 70° W.</p>
39.30	<p>Graded road, bears N. and S.</p>
39.72	<p>The cor. of secs. 22, 23, 26 and 27.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, creosote bush and cat claw in west half mile.</p>
	<hr/> <p>N. 0°12' E., bet. secs. 22 and 23.</p>
	<p>Over nearly level land, through moderate undergrowth.</p>
20.50	<p>Track road, bears E. and W.; enter SE. cor. of cultivated field, bears N. and W.</p>
40.03	<p>The $\frac{1}{4}$ sec. cor. of secs. 22 and 23, as determined by testimony of adjacent land owners and a redwood stake, 1 x 1 ins., 18 ins. long, faintly mkd. S. on one side; this stake was found tied on an E. and W. fence. This is accepted as the best remaining evidence of the orig. cor.</p>
	<p>At the corner point</p>
	<p>Set the iron post 22 ins. in the ground, brass cap mkd.</p>
	<p style="text-align: center;">T13S R30E $\frac{1}{4}$ S22 S23 1969</p>
	<p>Bury the redwood stake alongside the iron post.</p>
	<p>The cor. is located underneath an E. and W. fence.</p> <hr/>

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS					
	<p>N. 0°48' W., beginning new measurement.</p> <p>Over nearly level land; leave cultivated field, bears S. and W.; enter moderate undergrowth.</p>				
39.75	Dim track road, bears E. and W.				
39.90	Telephone line, bears E. and W.				
40.07	<p>Point for the cor. of secs. 14, 15, 22 and 23, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T13S R30E</p> <table style="margin: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S15</td> <td style="padding: 0 5px;">S14</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S22</td> <td style="padding: 0 5px;">S23</td> </tr> </table> <p>1969</p> </div> <p>Set a wooden post, 4 ins. square, 3½ ft. long, alongside the iron post.</p> <p>The cor. is located 115 lks. West of a N. and S. fence.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, creosote bush and cat claw.</p>	S15	S14	S22	S23
S15	S14				
S22	S23				
40.02	<p>From the cor. of secs. 13, 14, 23 and 24.</p> <p>N. 89°55' W., bet. secs. 14 and 23.</p> <p>Over nearly level land, along the S. side of an E. and W. fence.</p> <p>The ¼ sec. cor. of secs. 14 and 23, monumented by the remains of an old redwood stake, 1 x 1 ins., 6 ins. long, found 18 ins. below the surface of the ground, and is accepted as the best remaining evidence of the orig. cor.</p> <p>At the corner point</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T13S R30E</p> <table style="margin: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">¼</td> <td style="padding: 0 5px;">S14</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">S23</td> </tr> </table> <p>1969</p> </div> <p>from which</p> <p style="padding-left: 40px;">A fence cor., bears N. 1° E., 48 lks. dist.; fences bear N. 1° E. and S. 89°55' E.</p> <p>Set a wooden post, 2 x 4 ins. squared, 3 ft. long, alongside the iron post.</p>	¼	S14		S23
¼	S14				
	S23				

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS	
	<p>The cor. is located 45 lks. South of a telephone line bearing E. and W.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89°04' W., beginning new measurement.</p>
28.80	Telephone line, bears E. and W.
39.00	Graded road, bears N. and S.
39.13	Fence, bears N. and S.
40.28	<p>The cor. of secs. 14, 15, 22 and 23.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, scattered cat claw.</p>
	<p>N. 0°24' W., bet. secs. 14 and 15.</p> <p>Over nearly level land, through low undergrowth.</p>
33.40	Underground gas line under construction, bears N. 89°40' E. and S. 89°40' W.
35.16	Corral fence, fence bears E. and bears W. for 50 lks., thence bears N. 5° W.
40.06	<p>Point for the ¼ sec. cor. of secs. 14 and 15, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post 26 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T13S R30E</p> <p>¼</p> <p>S15 S14</p> <p>1969</p> </div> <p>from which</p> <p style="padding-left: 40px;">A windmill, bears S. 3°08' W., 174 lks. dist.</p>
40.33	N. side of corral; fences bear S. 67° E., curving S. and bears N. 67° W.
42.50	Track road, bears SE. and NW.
80.12	<p>Point for the cor. of secs. 10, 11, 14 and 15, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post 15 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>T13S R30E</p> <p>S10 S11</p> <p>S15 S14</p> <p>1969</p> </div> <p>The cor. is located 190 lks. West of a graded road bearing N. and S.</p>

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS	
	<p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, grass and scattered cat claw.</p>
<p>38.40</p> <p>40.15</p>	<p>From the cor. of secs. 11, 12, 13 and 14. N. 89°50' W., bet. secs. 11 and 14. Over nearly level land, through scattered undergrowth. Old abandoned fence line, bears N. and S. Point for the ¼ sec. cor. of secs. 11 and 14, at proportionate dist.; there is no remaining evidence of the orig. cor. Set the iron post 20 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E ¼ $\frac{S11}{S14}$ 1968</p> <p>Set a wooden post, 4 ins. square, 3½ ft. long, alongside the iron post.</p>
<p>78.40</p> <p>80.30</p>	<p>Graded road, bears N. and S.</p> <p>The cor. of secs. 10, 11, 14 and 15. Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, creosote bush and cat claw.</p>
	<p>N. 1°01' E., bet. secs. 10 and 11. Over nearly level land, through scattered undergrowth. Point for the ¼ sec. cor. of secs. 10 and 11, at proportionate dist., falls on a graded road bearing SE. and NW.; there is no remaining evidence of the orig. cor. Set an iron post 2½ ins. diam., 12 ins. long, 6 ins. below the surface of the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E ¼ S10 S11 1968</p> <p>from which</p> <p>An iron post, set 24 ins. in the ground, for a reference monument, bears East, 30.3 lks. dist., mkd. T13SR30E S11 RM 20 FT 1968 and an arrow pointing to the cor. Set a wooden post, 3 ft. long, 3 ins. diam., alongside the iron post.</p>

Dep. Res., Portion Subdivisional Lines, T. 13 S , R 30 E.

CHAINS

An iron post, set 20 ins. in the ground, for a reference monument, bears West, 30.3 ft. dist., mkd. T13SR30E S10 RM 20 FT 1968 and an arrow pointing to the cor. Set a wood post, 4 ins. square, 3 ft. long, alongside the iron post.

A well casing, 6 ins. diam., projecting 3 ft. above the ground bears N. 81°05' E., 486 lks. dist.

40.20 Leave graded road, bears SE., curving S. and bears NW.

80.06 Fence, bears N. 89°40' E. and S. 89°40' W.

80.14 The cor. of secs. 2, 3, 10 and 11, monumented by a water pipe 1½ ins. diam., 20 ins. long, projecting 10 ins. above the ground, with a weathered stake, 2 ins. square, 6 ins. long, alongside. This position has long been recognized as the cor. by local land owners and is accepted as the best available evidence of the orig. cor.

At the corner point

Set the iron post 24 ins. in the ground, brass cap mkd.

T13S R30E
 $\frac{S\ 3}{S\ 2}$
 $\frac{S10}{S11}$
 1968

Bury the water pipe and weathered stake alongside the iron post.

Raise a mound of stone W. of the cor.

Land, nearly level.

Soil, sandy clay loam.

No timber; undergrowth, creosote bush and cat claw.

From the cor. of secs. 1, 2, 11 and 12.

S. 89°49' W., bet. secs. 2 and 11.

Over nearly level land, through scattered undergrowth, along an E. and W. fence.

19.815 Point for the E 1/16 sec. cor. of secs. 2 and 11, at proportionate dist.

Set the iron post 24 ins. in the ground, brass cap mkd.

T13S R30E
 E 1/16 $\frac{S\ 2}{S11}$
 1969

Set a wooden post, 4 ins. square, 3 ft. long, alongside the iron post.

The cor. is located 17 lks. South of an E. and W. fence.

39.63 Point for the ¼ sec. cor. of secs. 2 and 11, at proportionate dist.; there is no remaining evidence of the orig. cor.

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS	
79.26	<p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E $\frac{1}{4}$ $\frac{S\ 2}{S11}$ 1968</p> <p>Set a round wooden post, 4 ins. diam., 6 ft. long, alongside the iron post.</p> <p>The cor. is located 2 lks. North of an E. and W. fence.</p> <p>The cor. of secs. 2, 3, 10 and 11.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, scattered cat claw.</p>
20.00	<p>N. 0°16' W., bet. secs. 2 and 3.</p> <p>Over nearly level land, through scattered undergrowth.</p> <p>Undergrowth changes to moderate, bears E. and W.</p>
39.65	<p>The point for the $\frac{1}{4}$ sec. cor. of secs. 2 and 3, as determined from a wood stake, 2 x 2 ins., projecting 3 ins. above the ground, originally set in a pit, 5$\frac{1}{2}$ ft. North of the cor.</p> <p>At the corner point</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E $\frac{1}{4}$ S 3 S 2 1968</p> <p>Bury the wood stake and set a wooden post, 2 x 4 ins. squared, 3 ft. long, alongside the iron post.</p>
11.60	<p>N. 1°48' W., beginning new measurement.</p> <p>Over nearly level land.</p> <p>Track road, bears E. and W.</p>
11.70	<p>Fence, bears E. and W.</p>
42.43	<p>The cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., monumented by an iron post 2$\frac{1}{2}$ ins. diam., as described in the field notes of the concurrent resurvey of T. 12 S., R. 30 E., under this same group.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, scattered cat claw, first $\frac{1}{2}$ mile, moderate creosote bush and cat claw rest of the mile.</p>

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS	
	From the cor. of secs. 22, 23, 26 and 27.
	S. 89°35' W., bet. secs. 22 and 27.
	Over nearly level land, through scattered undergrowth.
0.03	Telephone line, bears N. 0°15' E. and S. 0°15' W.
0.50	Drainage ditch, 10 lks. wide, 2 ft. deep, drains N.
1.40	Enter cultivated field, bears N. and S.
19.52	Graded road, bears N. and S.
27.25	Power line, bears S. 75° E. and N. 75° W.; leave cultivated field.
28.60	Graded road, bears S. 75° E. and N. 75° W.
31.05	Right-of-way fence, bears S. 75° E. and N. 75° W.
34.20	Telephone line, bears S. 75° E. and N. 75° W.
35.10	Graded road, bears S. 75° E. and N. 75° W.
37.00	Southern Pacific Railroad, bears S. 75° E. and N. 75° W.
38.60	Telegraph line, bears S. 75° E. and N. 75° W.
40.10	Power line, bears N. and S.
40.27	Point for the ¼ sec. cor. of secs. 22 and 27, at proportionate dist.; there is no remaining evidence of the orig. cor.
	Set the iron post 24 ins. in the ground, brass cap mkd.
	T13S R30E ¼ $\frac{S22}{S27}$ 1968
	Set a wooden post, 4 ins. square, 4 ft. long, alongside the iron post.
48.13	State Highway 86, bears S. 75° E. and N. 75° W.
52.00	Right-of-way fence, bears S. 75° E. and N. 75° W.
55.40	Center of west bound lanes of Interstate 10, bears S. 75° E. and N. 75° W.
61.55	Center of east bound lanes of Interstate 10, bears S. 75° E. and N. 75° W.
62.30	Drainage ditch, 10 lks. wide, 1 ft. deep, drains N.
66.90	Right-of-way fence, bears S. 75° E. and N. 75° W.; enter moderate undergrowth.
67.30	Power line, bears S. 75° E. and N. 75° W.

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS							
80.54	<p>The cor. of secs. 21, 22, 27 and 28, monumented by a concrete post, 4 ins. square, projecting 12 ins. above the ground, with a metal tag mkd. COR 14 NW COR SEC 27 and a water pipe 1 in. diam., alongside. This post has long been recognized as the cor. by local land owners and is accepted as the best available evidence of the orig. cor. position.</p> <p>At the corner point</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>S21</td> <td>S22</td> </tr> <tr> <td>S28</td> <td>S27</td> </tr> <tr> <td colspan="2" style="text-align: center;">1968</td> </tr> </table> </p> <p>from which</p> <p style="padding-left: 40px;">An elevation marker, bears N. 0°15' W., 374 lks. dist.; monumented by a brass tablet, 3 ins. diam., set in a concrete post, 6 ins. diam., projecting 4 ins. above the ground, tablet mkd. ELEV + Sta 19</p> <p>Bury the concrete post and water pipe alongside the iron post.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, creosote bush and cat claw.</p>	S21	S22	S28	S27	1968	
S21	S22						
S28	S27						
1968							
	<p>N. 0°17' W., bet. secs. 21 and 22.</p> <p>Over nearly level land, through moderate undergrowth.</p> <p>3.60 Power line, bears S. 75° E. and N. 75° W.</p> <p>3.70 Right-of-way fence, bears S. 75° E. and N. 75° W.</p> <p>5.20 Center of east bound lanes of Interstate 10, bears S. 75° E. and N. 75° W.</p> <p>6.70 Center of west bound lanes of Interstate 10, bears S. 75° E. and N. 75° W.</p> <p>7.60 Right-of-way fence, bears S. 75° E. and N. 75° W.</p> <p>9.00 State Highway No. 86, bears S. 75° E. and N. 75° W.</p> <p>11.40 Telegraph line, bears S. 75° E. and N. 75° W.</p> <p>12.10 Southern Pacific Railroad, bears S. 75° E. and N. 75° W.</p> <p>12.80 Telephone line, bears S. 75° E. and N. 75° W.</p> <p>13.30 Graded road, bears S. 75° E. and N. 75° W.</p> <p>13.70 Right-of-way fence, bears S. 75° E. and N. 75° W.</p> <p>14.50 Graded road, bears S. 75° E. and N. 75° W.</p> <p>14.80 Power line, bears S. 75° E. and N. 75° W.</p>						

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS	
40.00	<p>The ¼ sec. cor. of secs. 21 and 22, monumented by a concrete post, 4 ins. square, projecting 10 ins. above the ground, with a metal tag mkd. COR 16 E ¼ SEC 21. This post has long been recognized as the cor. by local land owners and is accepted as the best available evidence of the orig. cor. position.</p> <p>At the corner point</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E ¼ S21 S22 1968</p> <p>Bury the concrete post and set a wooden post, 2 x 3 ins. squared, 3½ ft. long, alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°32' W., beginning new measurement.</p> <p>Over nearly level land.</p>
40.30	Dim track road, bears E. and W.
40.45	Telephone line, bears E. and W.
40.64	<p>Point for the cor. of secs. 15, 16, 21 and 22, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E S16 S15 S21 S22 1969</p> <p>Set a wooden post, 4 ins. square, 5 ft. long, alongside the iron post.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, creosote bush and cat claw.</p>
19.00	<p>From the cor. of secs. 14, 15, 22 and 23.</p> <p>S. 89°59' W., bet. secs. 15 and 22.</p> <p>Over nearly level land, through scattered undergrowth, along a telephone line bearing E. and W.</p>
40.34	<p>Fence, bears N. and S.</p> <p>Point for the ¼ sec. cor. of secs. 15 and 22, at proportionate dist.; there is no remaining evidence of the orig. cor.; not monumented. The cor. point is located 19 lks. North of a telephone line bearing E. and W.</p>

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS	
80.68	<p>The cor. of secs. 15, 16, 21 and 22.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, scattered cat claw.</p>
29.30	<p>N. 0°13' W., bet. secs. 15 and 16.</p> <p>Over nearly level land, through scattered undergrowth.</p> <p>Track road, bears E. and W.</p>
40.64	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 15 and 16, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E $\frac{1}{4}$ S16 S15 1969</p> <p>Set a wooden post, 4 ins. square, 3 ft. long, alongside the iron post.</p>
60.96	<p>Point for the N $\frac{1}{16}$ sec. cor. of secs. 15 and 16, at proportionate dist.</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E N $\frac{1}{16}$ S16 S15 1969</p> <p>from which</p> <p style="text-align: center;">A windmill, bears N. 10°38' E., 18.77 chs. dist.</p> <p>Set a wooden post, 4 ins. square, 3 ft. long, alongside the iron post.</p>
66.20	Track road, bears NE. and SW.
70.10	Track road, bears S. 80° E. and N. 80° W.
71.60	Track road, bears NE. and SW.
81.28	<p>Point for the cor. of secs. 9, 10, 15 and 16, at proportionate dist.; there is no remaining evidence of the orig. cor.; not monumented.</p> <p>from which</p> <p style="text-align: center;">A windmill, bears S. 62°19' E., 400 lks. dist.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, creosote bush and cat claw.</p>

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS	
40.23	<p>From the cor. of secs. 10, 11, 14 and 15.</p> <p>N. 89°13' W., bet. secs. 10 and 15.</p> <p>Over nearly level land, through scattered undergrowth.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 10 and 15, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E $\frac{1}{4} \frac{S10}{S15}$ 1968</p>
80.46	<p>Set a wooden post, 2 x 4 ins. squared, 4 ft. long, alongside the iron post.</p> <p>The point for the cor. of secs. 9, 10, 15 and 16.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, cat claw and grass.</p>
39.70	<p>N. 0°51' E., bet. secs. 9 and 10.</p> <p>Over nearly level land, through scattered undergrowth.</p> <p>Old abandoned fence line, bears E. and W.</p>
40.64	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 9 and 10, at proportionate dist.; there is no remaining evidence of the orig. cor.; not monumented.</p>
79.60	<p>Fence, bears E. and W.</p>
81.29	<p>Point for the cor. of secs. 3, 4, 9 and 10, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E $\frac{S 4 S 3}{S 9 S 10}$ 1969</p> <p>Set a wooden post, 4 ins. square, 3½ ft. long, alongside the iron post.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, cat claw and grass.</p>
	<p>From the cor. of secs. 2, 3, 10 and 11.</p> <p>N. 88°24' W., bet. secs. 3 and 10.</p>

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS	
	<p>Over nearly level land, through scattered undergrowth, along the N. side of an E. and W. fence.</p>
34.80	<p>Fence, bears N. 15° W. and bears S. 15° E., 117 lks. to a cor. of fences bearing E., W. and N. 15° W.</p>
36.40	<p>Graded road, bears SE. and N. 15° W.</p>
40.34	<p>Point for the ¼ sec. cor. of secs. 3 and 10, at proportionate dist.; there is no remaining evidence of the orig. cor.</p>
	<p>Set the iron post 24 ins. in the ground, brass cap mkd.</p>
	<p style="text-align: center;">T13S R30E $\frac{1}{4}$ $\frac{S\ 3}{S10}$ 1969</p>
	<p>Set a wooden post, 3 x 4 ins. squared, 3 ft. long, alongside the iron post.</p>
	<p>The cor. is located 130 lks. North of an E. and W. fence.</p>
80.68	<p>The cor. of secs. 3, 4, 9 and 10.</p>
	<p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, cat claw and grass.</p>
	<p>N. 0°42' W., bet. secs. 3 and 4.</p>
	<p>Over nearly level land, through scattered undergrowth.</p>
37.70	<p>Graded road, bears E. and W.</p>
38.00	<p>Fence, bears W., and bears NE. for approximately 100 lks.; thence bears E.</p>
40.64	<p>Point for the ¼ sec. cor. of secs. 3 and 4, at proportionate dist.; there is no remaining evidence of the orig. cor.</p>
	<p>Set the iron post 22 ins. in the ground, brass cap mkd.</p>
	<p style="text-align: center;">T13S R30E $\frac{1}{4}$ S 4 S 3 1969</p>
	<p>Set a wooden post, 3 x 4 ins. squared, 3 ft. long, alongside the iron post.</p>
81.16	<p>The cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp., monumented by an iron post 2½ ins. diam., as described in the field notes of the concurrent resurvey of T. 12 S., R. 30 E., under this same group.</p>
	<p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, cat claw and grass.</p>

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS	
	<p>From the cor. of secs. 21, 22, 27 and 28.</p>
	<p>S. 89°41' W., bet. secs. 21 and 28.</p>
	<p>Over nearly level land, through moderate undergrowth.</p>
7.40	<p>Underground telephone cable, bears S. 75° E. and N. 75° W.</p>
38.90	<p>Track road, bears N. and S.</p>
39.60	<p>Power line, bears N. and S.</p>
40.14	<p>Point for the ¼ sec. cor. of secs. 21 and 28, at proportionate dist.; there is no remaining evidence of the orig. cor.; not monumented.</p>
80.28	<p>The point for the cor. of secs. 20, 21, 28 and 29, at proportionate dist.; there is no remaining evidence of the orig. cor.; not monumented.</p>
	<p>from which</p>
	<p>The ¼ sec. cor. of secs. 28 and 29, bears S. 0°37' E., 40.06 chs. dist., monumented by a water pipe, 1½ ins. diam., projecting 4 ft. above the ground. This pipe has long been recognized as the cor. by local land owners and is accepted as the best available evidence of the orig. cor. position; not monumented.</p>
	<p>The ¼ sec. cor. of secs. 20 and 29, bears S. 89°45' W., 40.22 chs. dist., monumented by a wooden post, 4 ins. square, projecting 4½ ft. above the ground, with a lathe nailed to the top (used as a flag). This post has long been recognized as the cor. by local land owners and is accepted as the best available evidence of the orig. cor. position; not monumented.</p>
	<p>Land, nearly level.</p>
	<p>Soil, sandy clay loam.</p>
	<p>No timber; undergrowth, creosote bush and cat claw.</p>
	<p>N. 0°36' E., bet. secs. 20 and 21.</p>
	<p>Over nearly level land, through moderate undergrowth.</p>
20.00	<p>Underground telephone cable, bears S. 75° E. and N. 75° W.</p>
25.70	<p>Power line, bears S. 75° E. and N. 75° W.; Right-of-way fence parallels the power line.</p>
27.20	<p>Center of east bound lanes of Interstate 10, bears S. 75° E. and N. 75° W.</p>
28.90	<p>Center of west bound lanes of Interstate 10, bears S. 75° E. and N. 75° W.</p>
29.90	<p>Right-of-way fence, bears S. 75° E. and N. 75° W.</p>

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS	
31.00	State Highway 86, bears S. 75° E. and N. 75° W.
33.40	Telegraph line, bears S. 75° E. and N. 75° W.
34.10	Southern Pacific Railroad, bears S. 75° E. and N. 75° W.
34.40	Graded road, bears S. 75° E. and N. 75° W.
34.80	Telephone line, bears S. 75° E. and N. 75° W.
35.70	Right-of-way fence, bears S. 75° E. and N. 75° W.
36.80	Power line, bears S. 75° E. and N. 75° W.
40.06	<p>The $\frac{1}{4}$ sec. cor. of secs. 20 and 21, monumented by a concrete post, 4 ins. square, projecting 12 ins. above the ground, with a metal tag on the S. face, mkd. COR 17 W $\frac{1}{4}$ S21. This post has long been recognized as the cor. by local land owners and is accepted as the best available evidence of the orig. cor. position; not remonumented.</p>
	<p style="text-align: center;">_____</p> <p>N. 1°39' W., beginning new measurement.</p>
	<p>Over nearly level land, through moderate undergrowth.</p>
40.80	Telephone line, bears E. and W.
40.92	<p>Point for the cor. of secs. 16, 17, 20 and 21, at proportionate dist.; there is no remaining evidence of the orig. cor.; not monumented.</p>
	<p>from which</p>
	<p>The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., bears S. 89°21' W., 159.67 chs. dist., monumented by an iron post 2½ ins. diam., as described in the field notes of the concurrent re-survey of T. 13 S., R. 29 E., under this same group.</p>
	<p>This control line was fully retraced, and careful search was made for evidence of intervening corners, none of which was recovered.</p>
	<p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, creosote bush and cat claw.</p>
	<p>From the cor. of secs. 15, 16, 21 and 22.</p>
	<p>S. 89°51' W., bet. secs. 16 and 21.</p>
	<p>Over nearly level land, through scattered undergrowth, along a telephone line bearing E. and W.</p>
40.22	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 16 and 21, at proportionate dist.; there is no remaining evidence of the orig. cor.</p>

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS	
	<p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E $\frac{1}{4}$ $\frac{S16}{S21}$ 1969</p> <p>from which</p> <p style="padding-left: 40px;">A stock pond, bears N. 75° E., 11.97 chs. dist.</p> <p>Set a wooden post, 4 ins. square, 4 ft. long, alongside the iron post.</p> <p>The cor. is located 13 lks. North of a telephone line bearing E. and W.</p> <p>80.44 The point for the cor. of secs. 16, 17, 20 and 21.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, scattered cat claw.</p>
	<p>N. 0°04' E., bet. secs. 16 and 17.</p> <p>Over nearly level land, through scattered undergrowth.</p> <p>40.90 Point for the $\frac{1}{4}$ sec, cor. of secs. 16 and 17, at proportionate dist.; there is no remaining evidence of the orig. cor.; not monumented.</p> <p>42.20 Track road, bears SE. and NW.</p> <p>80.50 Track road, bears E. and W.</p> <p>81.80 Point for the cor. of secs. 8, 9, 16 and 17, at proportionate dist.; there is no remaining evidence of the orig. cor.; not monumented.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, scattered cat claw.</p> <hr/> <p>From the point for the cor. of secs. 9, 10, 15 and 16.</p> <p>N. 89°45' W., bet. secs. 9 and 16.</p> <p>Over nearly level land, through scattered undergrowth.</p> <p>40.15 Point for the $\frac{1}{4}$ sec. cor. of secs. 9 and 16, at proportionate dist.; there is no remaining evidence of the orig. cor.; not monumented.</p> <p>59.20 Track road, bears NE. and SW., 280 lks. dist.; thence W.</p> <p>80.30 The point for the cor. of secs. 8, 9, 16 and 17.</p>

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS	
	<p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, scattered cat claw.</p> <hr/> <p>N. 0°40' E., bet. secs. 8 and 9.</p> <p>Over nearly level land, through scattered undergrowth.</p> <p>40.90 Point for the $\frac{1}{4}$ sec. cor. of secs. 8 and 9, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E $\frac{1}{2}$ S 8 S 9 1969</p> <p>Set a wooden post, 2 x 4 ins. squared, 3 ft. long, alongside the iron post.</p> <p>79.70 Fence, bears E. and W.</p> <p>81.80 Point for the cor. of secs. 4, 5, 8 and 9, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E S 5 S 4 S 8 S 9 1969</p> <p>Set a wooden post, 2 x 4 ins. squared, 3 ft. long, alongside the iron post.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, scattered cat claw.</p>
	<p>From the cor. of secs. 3, 4, 9 and 10.</p> <p>N. 89°23' W., bet. secs. 4 and 9.</p> <p>Over nearly level land, through scattered undergrowth.</p> <p>40.29 Point for the $\frac{1}{4}$ sec. cor. of secs. 4 and 9, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E $\frac{1}{2}$ S 4 S 9 1969</p>

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS	
80.59	<p>Set a wooden post, 2 x 4 ins. squared, 3 ft. long, alongside the iron post.</p> <p>The cor. is located 207 lks. North of an E. and W. fence.</p> <p>The cor. of secs. 4, 5, 8 and 9.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, scattered cat claw.</p>
40.90	<p>N. 0°16' W., bet. secs. 4 and 5.</p> <p>Over nearly level land, through scattered undergrowth.</p> <p>Point for the $\frac{1}{2}$ sec. cor. of secs. 4 and 5, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E $\frac{1}{2}$ S 5 S 4 1969</p>
52.40	<p>Set a wooden post, 3 x 4 ins. squared, 3 ft. long, alongside the iron post.</p> <p>Track road, bears E. and W.</p>
81.60	<p>The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp., monumented by an iron post 2½ ins. diam., projecting 10 ins. above the ground, brass cap mkd.</p> <p style="text-align: center;">T12S R30E <u>S32 S33</u> S 5 S 4 T13S 1963</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, scattered cat claw.</p>
	<p>From the cor. of secs. 29, 30, 31 and 32, monumented by a concrete post, 4 ins. square, projecting 5 ins. above the ground with a metal tag on S. side mkd. COR 4 SW COR SEC 29. This position has long been recognized as the cor. by local land owners and is accepted as the best available evidence of the orig. cor. position.</p> <p>At the corner point</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E <u>S30 S29</u> <u>S31 S32</u> 1968</p>

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS	
	<p>Bury the concrete post alongside the iron post.</p> <p>S. 88°37' W., bet. secs. 30 and 31.</p> <p>Over nearly level land, through moderate undergrowth.</p>
0.40	Fence, bears N. and S.
0.50	Track road, bears N. and S.
41.07	<p>Point for the ¼ sec. cor. of secs. 30 and 31, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T13S R30E</p> <p>¼ <u>S30</u></p> <p>S31</p> <p>1968</p> </div> <p>Set a wooden post, 2 x 4 ins. squared, 4 ft. long, alongside the iron post.</p>
80.75	<p>The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., monumented by an iron post 2½ ins. diam., as described in the field notes of the concurrent resurvey of T. 13 S., R. 29 E., under this same group.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, creosote bush and cat claw.</p>
40.16	<p>From the cor. of secs. 29, 30, 31 and 32.</p> <p>N. 0°06' W., bet. secs. 29 and 30.</p> <p>Over nearly level land, through moderate undergrowth.</p> <p>The ¼ sec. cor. of secs. 29 and 30, monumented by a concrete post, 4 ins. square, projecting 20 ins. above the ground with a metal tag on the S. side mkd. COR 3 W ¼ SEC 29. This post has long been recognized as the cor. by local land owners and is accepted as the best available evidence of the orig. cor. position.</p> <p>At the corner point</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T13S R30E</p> <p>¼</p> <p>S30 S29</p> <p>1968</p> </div> <p>Bury the concrete post alongside the iron post.</p> <p>The cor. is located 50 lks. East of a N. and S. fence.</p> <hr style="width: 20%; margin: 10px auto;"/>

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS	
40.01	<p>N. 0°05' E., beginning new measurement.</p> <p>Over nearly level land.</p> <p>The cor. of secs. 19, 20, 29 and 30, monumented by a concrete post, 4 ins. square, projecting 4 ins. above the ground with a metal tag on the S. face mkd. COR 2 SW COR SEC 20. This post has long been recognized as the cor. by local land owners and is accepted as the best available evidence of the orig. cor. position; not remonumented.</p> <p>from which</p> <p style="padding-left: 40px;">A fence cor., bears S. 46½° W., 60 lks. dist.; fences bear N., S. and W.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, creosote bush and cat claw.</p>
0.40	<p>S. 88°31' W., bet. secs. 19 and 30.</p> <p>Over nearly level land, through moderate undergrowth.</p> <p>Fence, bears N. and S.; thence along a fence bearing irregularly E. and W.</p>
41.35	<p>Point for the ¼ sec. cor. of secs. 19 and 30, at proportionate dist.; there is no remaining evidence of the orig. cor.; not monumented.</p>
81.17	<p>The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., monumented by a concrete post, 4 ins. square, projecting 20 ins. above the ground, with a metal tag on the S. face mkd. SEC COR 19 24 25 30. This post has long been recognized as the cor. by local land owners and is accepted as the best available evidence of the orig. cor. position; not remonumented.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, creosote bush and cat claw.</p>
34.10	<p>From the point for the cor. of secs. 8, 9, 16 and 17.</p> <p>N. 89°50' W., bet. secs. 8 and 17.</p> <p>Over nearly level land, through moderate undergrowth.</p> <p>Track road, bears S. 20° E. and N. 20° W.</p>
40.16	<p>Point for the ¼ sec. cor. of secs. 8 and 17, at proportionate dist.; there is no remaining evidence of the orig. cor.; not monumented.</p>
75.20	<p>Fence, bears N. 20° E. and S. 20° W.</p>
77.00	<p>Fence, bears N. 20° E. and S. 20° W.</p>

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS

79.40 Track road, bears SE. and NW.

80.32 Point for the cor. of secs. 7, 8, 17 and 18, at proportionate dist.; there is no remaining evidence of the orig. cor.

Set the iron post 24 ins. in the ground, brass cap mkd.

T13S R30E
 S 7 | S 8
 S18 | S17
 1969

from which

The $\frac{1}{4}$ sec. cor. of secs. 19 and 20, bears S. $0^{\circ}38'$ E., 122.26 chs. dist., monumented by a concrete post, 4 ins. square, projecting 4 ins. above the ground, with a metal tag on the S. face mkd. COR 1 W $\frac{1}{4}$ SEC 20. This post has long been recognized as the cor. by local land owners and is accepted as the best available evidence of the orig. cor. position; not remonumented.

This control line was fully retraced, and careful search was made for evidence of intervening corners, none of which was recovered.

A windmill, bears S. $52\frac{1}{2}^{\circ}$ E., 436 lks. dist.

Set a wooden post, 4 ins. square, 3 ft. long, alongside the iron post.

The cor. is located 90 lks. South of a track road bearing SE. and NW.

Land, nearly level.
 Soil, sandy clay loam.
 No timber; undergrowth, cat claw.

S. $88^{\circ}41'$ W., bet. secs. 7 and 18.

Over nearly level land, through moderate undergrowth.

40.21 Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 18, at proportionate dist.; there is no remaining evidence of the orig. cor.

Set the iron post 24 ins. in the ground, brass cap mkd.

T13S R30E
 $\frac{1}{4}$ S 7
 S18
 1969

Set a wooden post, 4 ins. square, 3 ft. long, alongside the iron post.

72.40 Track road, bears N. 60° E. and S. 60° W.

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS

78.75 The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., monumented by an iron post 2½ ins. diam., as described in the field notes of the concurrent resurvey of T. 13 S., R. 29 E., under this same group.

Land, nearly level.
Soil, sandy clay loam.
No timber; undergrowth, creosote bush and cat claw.

From the cor. of secs. 7, 8, 17 and 18.

N. 0°26' E., bet. secs. 7 and 8.

Over nearly level land, through moderate undergrowth.

0.90 Track road, bears NW. and SE.

40.75 Point for the ¼ sec. cor. of secs. 7 and 8, at proportionate dist.; there is no remaining evidence of the orig. cor.

Set the iron post 24 ins. in the ground, brass cap mkd.

T13S R30E
¼
S 7 | S 8
1969

Set a wooden post, 4 ins. square, 3 ft. long, alongside the iron post.

79.30 Fence, bears E. and W.

81.50 Point for the cor. of secs. 5, 6, 7 and 8, at proportionate dist.; there is no remaining evidence of the orig. cor.

Set the iron post 24 ins. in the ground, brass cap mkd.

T13S R30E
S 6 | S 5
S 7 | S 8
1969

Set a wooden post, 4 ins. square, 4 ft. long, alongside the iron post.

Land, nearly level.
Soil, sandy clay loam.
No timber; undergrowth, cat claw and grass.

From the cor. of secs. 4, 5, 8 and 9.

S. 89°58' W., bet. secs. 5 and 8.

Over nearly level land, through low undergrowth.

40.27 Point for the ¼ sec. cor. of secs. 5 and 8, at proportionate dist.; there is no remaining evidence of the orig. cor.


Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS	
57.20 80.55	<p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E $\frac{1}{4} \frac{S 5}{S 8}$ 1969</p> <p>Set a wooden post, 3 x 4 ins. squared, 3 ft. long, alongside the iron post.</p> <p>The cor. is located 217 lks. South of an E. and W. fence.</p> <p>Wash, 20 lks. wide, 1 ft. deep, drains N. 10° W.</p> <p>The cor. of secs. 5, 6, 7 and 8.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, cat claw and grass.</p>
40.34 78.40 78.88	<p>S. 89°11' W., bet. secs. 6 and 7.</p> <p>Over nearly level land, through low undergrowth.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 6 and 7, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E $\frac{1}{4} \frac{S 6}{S 7}$ 1969</p> <p>Set a wooden post, 4 ins. square, 3 ft. long, alongside the iron post.</p> <p>The cor. is located 169 lks. North of an E. and W. fence.</p> <p>Fence, bears N. and S.</p> <p>The cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., monumented by an iron post 2$\frac{1}{2}$ ins. diam., as described in the field notes of the concurrent resurvey of T. 13 S., R. 29 E., under this same group.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, grass and scattered cat claw.</p>
40.75	<p>From the cor. of secs. 5, 6, 7 and 8.</p> <p>N. 0°04' W., bet. secs. 5 and 6.</p> <p>Over nearly level land, through low undergrowth.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 5 and 6, at proportionate dist.; there is no remaining evidence of the orig. cor.</p>

Dep. Res., Portion Subdivisional Lines, T. 13 S., R. 30 E.

CHAINS	
	<p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T13S R30E $\frac{1}{4}$ S 6 S 5 1969</p> <p>Set a wooden post, 4 ins. square, 3 ft. long, alongside the iron post.</p>
75.80	Track road, bears E. and W.
81.35	<p>The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., monumented by an iron post 2½ ins. diam., as described in the field notes of the concurrent resurvey of T. 12 S., R. 30 E., under this same group.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, grass and scattered cat claw.</p>
Subdivision of Section 9, T. 13 S., R. 30 E.	
	<p>From the point for the ¼ sec. cor. of secs. 9 and 16. N. 0°45' E., on the N. and S. center line of sec. 9. Over nearly level land, through scattered undergrowth.</p>
19.00	Track road, bears NE. and SW.
40.76	<p>Point for the center ¼ sec. cor. of sec. 9, at intersection with the E. and W. center line of sec. 9.</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">C ¼ — S 9 1969</p> <p>Set a wooden post, 4 ins. square, 3 ft. long, alongside the iron post.</p>
79.50	Fence, bears E. and W.
81.54	<p>The ¼ sec. cor. of secs. 4 and 9.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, grass and scattered cat claw.</p>
	<p>From the point for the ¼ sec. cor. of secs. 9 and 10. N. 89°33' W., on the E. and W. center line of sec. 9. Over nearly level land, through scattered undergrowth.</p>
40.19	The center ¼ sec. cor. of sec. 9.

Subdivision of Section 9, T. 13 S., R. 30 E.

CHAINS	
80.41	<p>The $\frac{1}{4}$ sec. cor. of secs. 8 and 9.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, grass and scattered cat claw.</p>
<p>Subdivision of Section 10, T. 13 S., R. 30 E.</p>	
40.35	<p>From the $\frac{1}{4}$ sec. cor. of secs. 10 and 15.</p> <p>N. $0^{\circ}57'$ E., on the N. and S. center line of sec. 10.</p> <p>Over nearly level land, through scattered undergrowth.</p> <p>Point for the center $\frac{1}{4}$ sec. cor. of sec. 10, at intersection with the E. and W. center line of sec. 10.</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;">  </div> <p>Set a wooden post, 4 ins. square, $3\frac{1}{2}$ ft. long, alongside the iron post.</p>
79.10	Dim track road, bears E. and W.
79.40	Fence, bears E. and W.
80.70	<p>The $\frac{1}{4}$ sec. cor. of secs. 3 and 10.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, grass and scattered cat claw.</p>
0.10	<p>From the $\frac{1}{4}$ sec. cor. of secs. 10 and 11.</p> <p>N. $88^{\circ}48'$ W., on the E. and W. center line of sec. 10.</p> <p>Over nearly level land, through scattered undergrowth.</p> <p>W. edge of graded road bearing SE., curving S. and NW.</p>
40.28	The center $\frac{1}{4}$ sec. cor. of sec. 10.
80.56	<p>The point for the $\frac{1}{4}$ sec. cor. of secs. 9 and 10.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, grass and scattered cat claw.</p>
<p>Subdivision of Section 11, T. 13 S., R. 30 E.</p>	
<p>From the $\frac{1}{4}$ sec. cor. of secs. 11 and 14.</p>	


Subdivision of Section 11, T. 13 S., R. 30 E.

CHAINS

N. 0°41' E., on the N. and S. center line of sec. 11.
Over nearly level land, through moderate undergrowth.

20.10 Point for the C-S 1/16 sec. cor. of sec. 11.


Set the iron post 24 ins. in the ground, brass cap mkd.



Set a wooden post, 4 ins. square, 4 ft. long, alongside the iron post.

40.20 Point for the center 1/4 sec. cor. of sec. 11, at intersection with the E. and W. center line of sec. 11.


Set the iron post 24 ins. in the ground, brass cap mkd.



Set a wooden post, 2 x 4 ins. squared, 4 ft. long, alongside the iron post.

60.30 Point for the C-N 1/16 sec. cor. of sec. 11.

Set the iron post 24 ins. in the ground, brass cap mkd.



Set a wooden post, 2 x 4 ins. squared, 4 ft. long, alongside the iron post.

80.38 Fence, bears E. and W.

80.40 The 1/4 sec. cor. of secs. 2 and 11.

Land, nearly level.
Soil, sandy clay loam.
No timber; undergrowth, creosote bush and cat claw.

From the 1/4 sec. cor. of secs. 11 and 12.

N. 89°59' W., on the E. and W. center line of sec. 11.

Over nearly level land, through moderate undergrowth.

19.93 Point for the C-E 1/16 sec. cor. of sec. 11.

Set the iron post 24 ins. in the ground, brass cap mkd.

Subdivision of Section 11, T. 13 S., R. 30 E.

CHAINS

E 1/16

C _____ C

S11

1969

Set a wooden post, 2 x 4 ins. squared, 3½ ft. long, alongside the iron post.

39.87 The center ¼ sec. cor. of sec. 11.

79.60 E. edge of a graded road, bears S. and NW.

79.76 The ¼ sec. cor. of secs. 10 and 11.

Land, nearly level.

Soil, sandy clay loam.

No timber; undergrowth, creosote bush and cat claw.

Subdivision of the NE¼ of Section 11

From the C-E 1/16 sec. cor. of sec. 11.

N. 0°30' E., on the N. and S. center line of the NE¼ of sec. 11.

Over nearly level land, through moderate undergrowth.

20.12 Point for the NE 1/16 sec. cor. of sec. 11, at intersection with the E. and W. center line of the NE¼ of sec. 11.

Set the iron post 24 ins. in the ground, brass cap mkd.

NE 1/16

S11

1969

Set a wooden post, 2 x 4 ins. squared, 3½ ft. long, alongside the iron post.

40.24 The E 1/16 sec. cor. of secs. 2 and 11.

From the N 1/16 sec. cor. of secs. 11 and 12.

S. 89°56' W., on the E. and W. center line of the NE¼ of sec. 11.

Over nearly level land, through moderate undergrowth.


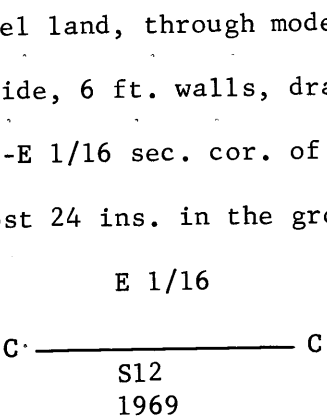
19.87 The NE 1/16 sec. cor. of sec. 11.

39.74 The C-N 1/16 sec. cor. of sec. 11.

Subdivision of Section 12, T. 13 S., R. 30 E.

From the point for the ¼ sec. cor. of secs. 12 and 13.

Subdivision of Section 12, T. 13 S., R. 30 E.

CHAINS	
	N. 0°01' W., on the N. and S. center line of sec. 12.
	Over nearly level land, through moderate undergrowth.
0.31	Fence, bears E. and W.
20.14	Point for the C-S 1/16 sec. cor. of sec. 12; not monumented.
38.50	Left bank of San Simon River, bears S. 35° E. and N. 35° W.
40.28	Point for the center 1/4 sec. cor. of sec. 12, at intersection with the E. and W. center line of sec. 12, falls in San Simon River; not monumented.
44.60	Right bank of San Simon River, bears S. 35° E. and N. 35° W.
50.90	Wash, 50 lks. wide, 10 ft. walls, drains NW.
53.30	Wash, 10 lks. wide, 6 ft. walls, drains SW.
60.42	Point for the C-N 1/16 sec. cor. of sec. 12.
	Set the iron post 24 ins. in the ground, brass cap mkd.
	<div style="text-align: center;">  </div>
	Set a wooden post, 4 ins. square, 5 ft. long, alongside the iron post.
60.60	Wash, 5 lks. wide, 5 ft. walls, drains SW.
80.50	Fence, bears E. and W.
80.56	The 1/4 sec. cor. of secs. 1 and 12.
	Land, nearly level.
	Soil, sandy clay loam.
	No timber; undergrowth, creosote bush and cat claw.
	From the 1/4 sec. cor. of secs. 7 and 12, on the E. bdy. of the Tp.
	N. 89°31' W., on the E. and W. center line of sec. 12.
	Over nearly level land, through moderate undergrowth.
6.50	Wash, 35 lks. wide, 6 ft. walls, drains NW.
19.97	Point for the C-E 1/16 sec. cor. of sec. 12.
	Set the iron post 24 ins. in the ground, brass cap mkd.
	<div style="text-align: center;">  </div>

Subdivision of Section 12, T. 13 S., R. 30 E.

CHAINS	
	Set a wooden post, 4 ins. square, 3 ft. long, alongside the iron post.
21.60	Wash, 50 lks. wide, 6 ft. walls, drains S. 80° W.
27.00	Wash, 50 lks. wide, 6 ft. walls, drains N. 10° W.
31.50	Wash, 35 lks. wide, 8 ft. walls, drains N. 35° W.
37.80	Right bank of San Simon River, bears S. 35° E. and N. 35° W.
39.94	The point for the center 1/4 sec. cor. of sec. 12.
41.00	Left bank of San Simon River, bears S. 35° E. and N. 35° W.
59.91	Point for the C-W 1/16 sec. cor. of sec. 12.
	Set the iron post 24 ins. in the ground, brass cap mkd.
	W 1/16 C ————— C S12 1969
	from which
	A fence cor., bears N. 62° W., 61 lks. dist.; fences bear S. and W.
	Set a wooden post, 4 ins. square, 3 ft. long, alongside the iron post.
78.60	Fence, bears N. and S.
79.88	The 1/4 sec. cor. of secs. 11 and 12.
	Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, creosote bush and cat claw.
Subdivision of the NE 1/4 of Section 12	
	—————
	From the C-E 1/16 sec. cor. of sec. 12.
	N. 0°07' W., on the N. and S. center line of the NE 1/4 of sec. 12.
	Over nearly level land, through moderate undergrowth.
0.80	Wash, 30 lks. wide, 6 ft. walls, drains S. 60° W.
20.11	Point for the NE 1/16 sec. cor. of sec. 12, at intersection with the E. and W. center line of the NE 1/4 of sec. 12.
	Set the iron post 24 ins. in the ground, brass cap mkd.
	NE 1/16 S12 1969



Subdivision of Section 12, T. 13 S., R. 30 E.

CHAINS	
	Set a wooden post, 4 ins. square, 4 ft. long, alongside the iron post.
40.19	Fence, bears E. and W.
40.22	The E 1/16 sec. cor. of secs. 1 and 12.
<hr/>	
From the N 1/16 sec. cor. of secs. 7 and 12, on the E. bdy. of the Tp.	
N. 89°29' W., on the E. and W. center line of the NE¼ of sec. 12.	
Over nearly level land, through moderate undergrowth.	
19.92	The NE 1/16 sec. cor. of sec. 12.
39.84	The C-N 1/16 sec. cor. of sec. 12.
<hr/>	
Subdivision of the SE¼ of Section 12	
<hr/>	
From the point for the E 1/16 sec. cor. of secs. 12 and 13.	
N. 0°09' W., on the N. and S. center line of the SE¼ of sec. 12.	
Over nearly level land, through moderate undergrowth.	
15.60	Left bank of San Simon River, bears SE. and N. 60° W.
17.60	Right bank of San Simon River, bears S. 60° E. and N. 60° W.
20.13	Point for the SE 1/16 sec. cor. of sec. 12, at intersection with the E. and W. center line of the SE¼ of sec. 12.
Set the iron post 22 ins. in the ground, brass cap mkd.	
SE 1/16 S12 1969	
Set a wooden post, 4 ins. square, 3 ft. long, alongside the iron post.	
40.26	The C-E 1/16 sec. cor. of sec. 12.
<hr/>	
From the S 1/16 sec. cor. of secs. 7 and 12, on the E. bdy. of the Tp.	
N. 89°33' W., on the E. and W. center line of the SE¼ of sec. 12.	
Over nearly level land, through moderate undergrowth.	



Subdivision of Section 12, T. 13 S., R. 30 E.

CHAINS	
20.03	The SE 1/16 sec. cor. of sec. 12.
26.20	Right bank of San Simon River, bears S. 60° E. and N. 60° W.
29.70	Left bank of San Simon River, bears SE. and N. 60° W.
40.06	The point for the C-S 1/16 sec. cor. of sec. 12.
Subdivision of the NW¼ of Section 12	
<hr/>	
From the C-W 1/16 sec. cor. of sec. 12.	
N. 0°10' E., on the N. and S. center line of the NW¼ of sec. 12.	
Over nearly level land, through moderate undergrowth.	
20.15	Point for the NW 1/16 sec. cor. of sec. 12, at intersection with the E. and W. center line of the NW¼ of sec. 12.
Set the iron post 8 ins. in the ground, mound of stone to top, brass cap mkd.	
NW 1/16 S12 1969	
Set a wooden post, 4 ins. square, 4 ft. long, alongside the iron post.	
33.50	Left bank of San Simon River, bears S. 35° E. and N. 35° W.
38.10	Right bank of San Simon River, bears S. 35° E. and N. 35° W.
40.30	The W 1/16 sec. cor. of secs. 1 and 12.
<hr/>	
From the C-N 1/16 sec. cor. of sec. 12.	
N. 89°29' W., on the E. and W. center line of the NW¼ of sec. 12.	
Over nearly level land, through moderate undergrowth.	
0.40	Wash, 15 lks. wide, 5 ft. walls, drains SW.
5.20	Right bank of San Simon River, bears S. 35° E. and N. 35° W.
7.50	Left bank of San Simon River, bears S. 35° E. and N. 35° W.
19.92	The NW 1/16 sec. cor. of sec. 12.
38.60	Fence, bears N. and S.

Subdivision of Section 12, T. 13 S., R. 30 E.

CHAINS	
39.84	The N 1/16 sec. cor. of secs. 11 and 12.
Subdivision of Section 13, T. 13 S., R. 30 E.	
From the 1/4 sec. cor. of secs. 13 and 24.	
N. 0°22' W., on the N. and S. center line of sec. 13.	
Over nearly level land, through moderate undergrowth.	
0.36	Telephone line, bears E. and W.
35.40	Underground gas line under construction, bears N. 89°40' E. and S. 89°40' W.
40.29	<p>Point for the center 1/4 sec. cor. of sec. 13, at intersection with the E. and W. center line of sec. 13, falls underneath an E. and W. fence.</p> <p>Set the iron post 14 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center;">  </div> <p>from which</p> <p style="margin-left: 40px;">A fence cor., bears East, 160 lks. dist.;</p> <p style="margin-left: 40px;">fences bear N. 0°35' E., E., S. 0°35' W. and W.</p>
80.59	<p>The point for the 1/4 sec. cor. of secs. 12 and 13.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, creosote bush and cat claw.</p>
From the 1/4 sec. cor. of secs. 13 and 18, on the E. bdy. of the Tp., monumented by an iron post 2 1/2 ins. diam., projecting 6 ins. above the ground, brass cap mkd.	
	
N. 89°38' W., on the E. and W. center line of sec. 13.	
Over nearly level land, through moderate undergrowth.	
2.50	Fence, bears N. and S.
38.54	Fence cor., fences bear N. 0°35' E., E., S. 0°35' W. and W.
40.14	The center 1/4 sec. cor. of sec. 13.
79.90	Fence, bears N. 0°35' E. and S. 0°35' W.

Subdivision of Section 13, T. 13 S., R. 30 E.

CHAINS	
80.28	<p>The point for the $\frac{1}{2}$ sec. cor. of secs. 13 and 14.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, creosote bush and cat claw.</p>
<p>Subdivision of Section 14, T. 13 S., R. 30 E.</p>	
	<p>From the $\frac{1}{2}$ sec. cor. of secs. 14 and 23.</p> <p>N. $0^{\circ}31'$ W., on the N. and S. center line of sec. 14.</p> <p>Over nearly level land, through scattered undergrowth.</p> <p>0.45 Telephone line, bears E. and W.</p> <p>0.48 Fence cor., bears East, 1 lk. dist., fences bear N. 1° E. and S. $89^{\circ}55'$ E.</p> <p>34.25 Underground gas line under construction, bears N. $89^{\circ}40'$ E. and S. $89^{\circ}40'$ W.</p>
40.49	<p>Point for the center $\frac{1}{2}$ sec. cor. of sec. 14, at intersection with the E. and W. center line of sec. 14.</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;">  </div> <p>The cor. is located 115 lks. West of a N. and S. fence.</p> <p>Set a wooden post, 3 x 4 ins. squared, 4 ft. long, alongside the iron post.</p>
60.59	<p>Point for the C-N $\frac{1}{16}$ sec. cor. of sec. 14.</p> <p>Set the iron post 14 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center;">  </div> <p>from which</p> <p style="padding-left: 40px;">A fence cor., bears S. $68^{\circ}30'$ E., 187 lks. dist.; fences bear E. and S. 1° W.</p> <p>Set a wooden post, 3 x 4 ins. squared, 3 ft. long, alongside the iron post.</p>
80.70	<p>The $\frac{1}{2}$ sec. cor. of secs. 11 and 14.</p>

Subdivision of Section 14, T. 13 S., R. 30 E.

CHAINS

Land, nearly level.
Soil, sandy clay loam.
No timber; undergrowth, grass and cat claw.

From the point for the $\frac{1}{4}$ sec. cor. of secs. 13 and 14.
N. $89^{\circ}40'$ W., on the E. and W. center line of sec. 14.
Over nearly level land, through scattered undergrowth.

38.94 Fence, bears N. 1° E. and S. 1° W.

40.09 The center $\frac{1}{4}$ sec. cor. of sec. 14.

78.20 Graded road, bears N. and S.

79.20 E. side of corral, fence bears SE., curving S. and N. 60° W.

80.31 The $\frac{1}{4}$ sec. cor. of secs. 14 and 15.

Land, nearly level.
Soil, sandy clay loam.
No timber; undergrowth, grass and scattered cat claw.


Subdivision of Section 15, T. 13 S., R. 30 E.

From the point for the $\frac{1}{4}$ sec. cor. of secs. 15 and 22.
N. $0^{\circ}16'$ W., on the N. and S. center line of sec. 15.
Over nearly level land, through scattered undergrowth.

31.70 Underground gas line under construction, bears N. $89^{\circ}40'$ E. and S. $89^{\circ}40'$ W.

40.35 Point for the center $\frac{1}{4}$ sec. cor. of sec. 15, at intersection with the E. and W. center line of sec. 15.


Set the iron post 22 ins. in the ground, brass cap mkd.



Set a wooden post, 4 ins. square, 4 ft. long, alongside the iron post.

60.53 Point for the C-N $\frac{1}{16}$ sec. cor. of sec. 15.

Set the iron post 24 ins. in the ground, brass cap mkd.




Set a wooden post, 4 ins. square, $3\frac{1}{2}$ ft. long, alongside the iron post.

Subdivision of Section 15, T. 13 S., R. 30 E.

CHAINS	
62.90	Track road, bears SE. and NW.
80.71	The $\frac{1}{4}$ sec. cor. of secs. 10 and 15.
	Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, grass and scattered cat claw.
From the $\frac{1}{4}$ sec. cor. of secs. 14 and 15.	
	N. $89^{\circ}36'$ W., on the E. and W. center line of sec. 15.
	Over nearly level land, through scattered undergrowth.
0.90	W. side of corral, fence bears S. 5° E. and N. 5° W.
2.20	Fence, bears S. 10° E. and N. 10° W.
4.70	Fence, bears N. 10° E. and S. 10° W.
40.29	The center $\frac{1}{4}$ sec. cor. of sec. 15.
80.58	The $\frac{1}{4}$ sec. cor. of secs. 15 and 16.
	Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, grass and cat claw.
Subdivision of Section 21, T. 13 S., R. 30 E.	
From the point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 28.	
	N. $0^{\circ}30'$ W., on the N. and S. center line of sec. 21.
	Over nearly level land, through moderate undergrowth.
9.60	App. dist. to underground telephone line, bears S. 75° E. and N. 75° W.
14.80	App. dist. to powerline, bears S. 75° E. and N. 75° W.
15.20	Right-of-way fence, bears S. 75° E. and N. 75° W.
16.50	Center of east bound lanes of Interstate 10, bears S. 75° E. and N. 75° W.
19.40	Center of west bound lanes of Interstate 10, bears S. 75° E. and N. 75° W.
20.40	Right-of-way fence, bears S. 75° E. and N. 75° W.
20.50	State Highway 86, bears S. 75° E. and N. 75° W.
22.90	Telegraph line, bears S. 75° E. and N. 75° W.
23.60	Southern Pacific Railroad, bears S. 75° E. and N. 75° W.
23.90	Graded road, bears S. 75° E. and N. 75° W.
24.30	Telephone line, bears S. 75° E. and N. 75° W.
25.20	Right-of-way fence, bears S. 75° E. and N. 75° W.


Subdivision of Section 21, T. 13 S., R. 30 E.

CHAINS	
26.30	Power line, bears S. 75° E. and N. 75° W.
40.04	<p>Point for the center $\frac{1}{4}$ sec. cor. of sec. 21, at intersection with the E. and W. center line of sec. 21.</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;">  </div> <p>Set a wooden post, 4 ins. square, 3$\frac{1}{2}$ ft. long, alongside the iron post.</p>
80.70	Telephone line, bears E. and W.
80.82	<p>The $\frac{1}{4}$ sec. cor. of secs. 16 and 21.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, creosote bush and cat claw.</p>
<p>From the $\frac{1}{4}$ sec. cor. of secs. 21 and 22.</p> <p>S. 89°43' W., on the E. and W. center line of sec. 21.</p> <p>Over nearly level land, through moderate undergrowth.</p>	
40.26	The center $\frac{1}{4}$ sec. cor. of sec. 21.
65.10	Wash, 10 lks. wide, 2 ft. deep, drains S.
79.66	The $\frac{1}{4}$ sec. cor. of secs. 20 and 21.
<p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, creosote bush and cat claw.</p>	
<p style="text-align: center;">Subdivision of Section 22, T. 13 S., R. 30 E.</p>	
<p>From the $\frac{1}{4}$ sec. cor. of secs. 22 and 27.</p> <p>N. 0°21' W., on the N. and S. center line of sec. 22.</p> <p>Over nearly level land.</p>	
0.30	Telegraph line, bears S. 75° E. and N. 75° W.
1.00	Southern Pacific Railroad, bears S. 75° E. and N. 75° W.
1.65	Graded road, bears S. 75° E. and N. 75° W.
1.85	Telephone line, bears S. 75° E. and N. 75° W.
2.50	Right-of-way fence, bears S. 75° E. and N. 75° W.; enter moderate undergrowth.
3.60	Graded road, bears S. 75° E. and N. 75° W.

Subdivision of Section 22, T. 13 S., R. 30 E.

CHAINS	
3.80	Power line, bears S. 75° E. and N. 75° W.
40.03	Point for the center $\frac{1}{4}$ sec. cor. of sec. 22, at intersection with the E. and W. center line of sec. 22.
	Set the iron post 22 ins. in the ground, brass cap mkd.
	from which
	A fence cor., bears S. 86°20' E., 10.5 lks. dist.; fences bear E. and S.
	Set a wooden post, 4 ins. square, 3 ft. long, alongside the iron post.
80.10	Telephone line, bears E. and W.
80.39	The point for the $\frac{1}{4}$ sec. cor. of secs. 15 and 22.
	Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, creosote bush and cat claw.
	From the $\frac{1}{4}$ sec. cor. of secs. 22 and 23.
	S. 89°34' W., on the E. and W. center line of sec. 22.
	Over nearly level land, along an E. and W. fence.
40.66	The center $\frac{1}{4}$ sec. cor. of sec. 22.
80.88	The $\frac{1}{4}$ sec. cor. of secs. 21 and 22.
	Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, grass and cat claw.
Subdivision of Section 24, T. 13 S., R. 30 E.	
	From the $\frac{1}{4}$ sec. cor. of secs. 24 and 25.
	N. 0°03' W., on the N. and S. center line of sec. 24.
	Over nearly level land, along a track road bearing N.
20.17	Point for the C-S $\frac{1}{16}$ sec. cor. of sec. 24.
	Set the iron post 22 ins. in the ground, brass cap mkd.

Subdivision of Section 24, T. 13 S., R. 30 E.

CHAINS	
	<p>from which</p> <p>A fence cor., bears N. 38°35' W., 41 lks. dist.; fences bear S. 0°10' E. and N. 89°38' W.</p> <p>Set a wooden post, 2 x 4 ins. squared, 3 ft. long, alongside the iron post.</p> <p>The cor. is located 14 lks. West of a power line bearing N. and S.</p>
40.30	Power line, bears E. and W.
40.34	<p>Point for the center $\frac{1}{4}$ sec. cor. of sec. 24, at intersection with the E. and W. center line of sec. 24.</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p>
	
	<p>from which</p> <p>A fence cor., bears N. 55°30' E., 60 lks. dist.; fences bear N. 0°10' E. and S. 89°34' E.</p> <p>The NE. cor. of a house, bears S. 11°00' W., 168 lks. dist.; house is 38 x 25 ft. with the long side bearing E. and W.</p> <p>A power pole No. D 5018, bears S. 84° E., 29.7 lks. dist.; lines bear N., S. and W.</p>
80.20	Fence, bears S. 89°44' E. and N. 89°44' W.
80.68	The $\frac{1}{4}$ sec. cor. of secs. 13 and 24.
	<p>Land, nearly level.</p> <p>Soil, sandy clay loam.</p> <p>No timber; undergrowth, grass.</p>
	<p>From the point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 24, on the E. bdy. of the Tp., as determined from two reference monuments.</p>
	<p>A reference monument, bears East, 50 lks. dist., monumented by an iron post 2$\frac{1}{2}$ ins. diam., projecting 6 ins. above the ground, mkd. $\frac{1}{4}$ S19 RM 1952 and an arrow pointing to the cor. point.</p>
	<p>A reference monument, bears West, 50 lks. dist., monumented by an iron post 2$\frac{1}{2}$ ins. diam., projecting 6 ins. above the ground, mkd. $\frac{1}{4}$ S24 RM 1952 and an arrow pointing to the cor. point.</p>
	N. 89°58' W., on the E. and W. center line of sec. 24.
	Over nearly level land, through moderate undergrowth.
0.10	W. edge of a graded road bearing N. and S.
0.44	Power line, bears N. and S.

Subdivision of Section 24, T. 13 S., R. 30 E.

CHAINS	
0.56	Fence, bears N. for 5 lks. to fence cor.; fences bear N., S. and N. 89°34' W.
20.40	Fence, bears N. for 15 lks. to fence cor.; fences bear S. 89°34' E., S. and N. 89°34' W.
40.10	Power line, bears N. and S.
40.39	The center ¼ sec. cor. of sec. 24.
60.58	Point for the C-W 1/16 sec. cor. of sec. 24; not monumented. Power line bears North, 20 lks. dist.; power line bears E. and W. about 25 lks. to end.
80.60	Track road, bears N. and S.
80.78	The ¼ sec. cor. of secs. 23 and 24.
	<p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, cat claw and creosote bush 1st ½ mile, grass and scattered cat claw 2nd ½ mile.</p>
	Subdivision of the SW¼ of Section 24
	From the W 1/16 sec. cor. of secs. 24 and 25.
	N. 0°08' E. on the N. and S. center line of the SW¼ of sec. 24.
	Over nearly level land, along a track road bearing N. and S.
0.03	Power line, bears S. 89°47' E. and N. 89°47' W., for 58 lks. and ends.
0.30	Track road, bears S. 89°47' E. and N. 89°47' W.
20.22	Point for the SW 1/16 sec. cor. of sec. 24, at intersection with the E. and W. center line of the SW¼ of sec. 24.
	Set the iron post 24 ins. in the ground, brass cap mkd.
	<p>S24 SW 1/16 1969</p>
	from which
	<p>A fence cor., bears N. 50° E., 81 lks. dist.; fences bear S. 89°38' E. and S. 0°10' E.</p>
	Set a wooden post, 4 ins. square, 5 ft. long, alongside the iron post.
40.44	The point for the C-W 1/16 sec. cor. of sec. 24.
	From the C-S 1/16 sec. cor. of sec. 24.

Subdivision of Section 24, T. 13 S., R. 30 E.

CHAINS	
	S. 89°54' W., on the E. and W. center line of the SW $\frac{1}{4}$ of sec. 24.
	Over nearly level land, along the N. side of a fence bearing E. and W.
0.10	Track road, bears N. and S.
0.25	Fence, bears S. 0°10' E. and N. 0°10' W.
19.65	Fence, bears S. 0°10' E. and N. 0°10' W.
19.95	Track road, bears N. and S.
20.26	The SW 1/16 sec. cor. of sec. 24.
40.52	The point for the S 1/16 sec. cor. of secs. 23 and 24.
Subdivision of Section 26, T. 13 S., R. 30 E.	
	From the point for the $\frac{1}{4}$ sec. cor. of secs. 26 and 35. N. 0°12' E., on the N. and S. center line of sec. 26.
	Over nearly level land, through moderate undergrowth.
0.16	Graded road, bears S. 89° E. and N. 89° W.
14.10	Track road, bears S. 60° E. and N. 60° W.
20.12	Point for the C-S 1/16 sec. cor. of sec. 26; not monumented.
39.82	Power line, bears NW., and bears SE. for approximately 5.00 chs., thence bears S. 62° E.
40.24	Point for the center $\frac{1}{4}$ sec. cor. of sec. 26, at intersection with the E. and W. center line of sec. 26; not monumented.
41.87	Underground telephone cable, bears S. 58° E. and N. 58° W., for 100 lks., thence N. 25°15' W.
42.00	Right-of-way fence, bears S. 58° E. and N. 58° W., for 100 lks., thence N. 25°15' W.
46.70	San Simon Exit, bears S. 25°15' E., for approximately 400 lks., thence curves NE. and bears N. 25°15' W., curving N. 62° W.
50.05	Center of east bound lanes of Interstate 10, bears S. 62° E. and N. 62° W.
51.90	Center of west bound lanes of Interstate 10, bears S. 62° E. and N. 62° W.
53.55	Right-of-way fence, bears S. 62° E. and N. 62° W.
55.65	Right-of-way fence, bears S. 75° E. and N. 75° W.

Subdivision of Section 26, T. 13 S., R. 30 E.

CHAINS	
57.20	State Highway 86, bears S. 75° E. and N. 75° W.
59.70	Telegraph line, bears S. 75° E. and N. 75° W.
59.80	Track road, bears S. 75° E. and N. 75° W.
60.35	Southern Pacific Railroad, bears S. 75° E. and N. 75° W.
61.05	Telephone line, bears S. 75° E. and N. 75° W.
61.65	Graded road, bears S. 75° E. and N. 75° W.
61.90	Right-of-way fence, bears S. 75° E. and N. 75° W.
62.40	Graded road, bears S. 75° E. and N. 75° W.
63.00	Power line, bears S. 75° E. and N. 75° W.
80.39	<p>The point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 26.</p> <p>Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, creosote bush and cat claw.</p>
	From the $\frac{1}{4}$ sec. cor. of secs. 25 and 26.
	N. 89°07' W., on the E. and W. center line of sec. 26.
	Over nearly level land, through dense undergrowth.
6.70	Fence, bears S. 25° E. and N. 25° W., 50 lks. dist., thence NE.; leave dense undergrowth.
7.60	San Simon Exit, bears N. and S.
9.905	<p>Point for the C-E-E $\frac{1}{64}$ sec. cor. of sec. 26.</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p>
	<p style="text-align: center;">S26 C-E-E $\frac{1}{64}$ 1969</p>
	Set a wooden post, 2 x 3 ins. squared, 3 ft. long, alongside the iron post.
17.30	Center of west bound lanes of Interstate 10, bears S. 62° E. and N. 62° W.
19.81	Point for the C-E $\frac{1}{16}$ sec. cor. of sec. 26; not monumented.
21.20	Center of east bound lanes of Interstate 10, bears S. 62° E. and N. 62° W.
35.50	San Simon Exit, on a curve, curving NE. and NW.
38.00	Right-of-way fence, bears S. 58° E. and N. 58° W.; enter moderate undergrowth.
38.05	Underground telephone cable, bears S. 58° E. and N. 58° W.

Subdivision of Section 26, T. 13 S., R. 30 E.

CHAINS	
39.63	The point for the center $\frac{1}{4}$ sec. cor. of sec. 26.
40.36	Power line, bears S. 60° E. and N. 60° W.
79.26	The point for the $\frac{1}{4}$ sec. cor. of secs. 26 and 27. Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, creosote bush and cat claw.
Subdivision of the $SE\frac{1}{4}$ of Section 26	
<hr style="width: 20%; margin: auto;"/>	
	From the E $\frac{1}{16}$ sec. cor. of secs. 26 and 35. N. $0^\circ 17'$ E., on the N. and S. center line of the $SE\frac{1}{4}$ of Sec. 26. Over nearly level land, through scattered undergrowth.
0.20	Graded road, bears S. $89^\circ 15'$ E. and N. $89^\circ 15'$ W.
5.05	Track road, bears S. 70° E. and N. 70° W.
10.055	Point for the C-S-SE $\frac{1}{64}$ sec. cor. of sec. 26; not monumented.
20.11	Point for the SE $\frac{1}{16}$ sec. cor. of sec. 26, at intersection with the E. and W. center line of the $SE\frac{1}{4}$ of sec. 26. Set the iron post 24 ins. in the ground, brass cap mkd. <div style="text-align: center;"> S26 SE 1/16 1969 </div> Set a wooden post, 2 x 4 ins. squared, 3 ft. long, alongside the iron post.
32.05	Power line, bears S. $61^\circ 40'$ E. and N. $61^\circ 40'$ W.
36.20	Underground telephone cable, bears S. 58° E. and N. 58° W.
36.55	Right-of-way fence, bears S. 62° E. and N. 62° W.
39.65	Center of east bound lanes of Interstate 10, bears S. 62° E. and N. 62° W.
40.23	The point for the C-E $\frac{1}{16}$ sec. cor. of sec. 26.
<hr style="width: 20%; margin: auto;"/>	
	From the S $\frac{1}{16}$ sec. cor. of secs. 25 and 26. N. $89^\circ 12'$ W., on the E. and W. center line of the $SE\frac{1}{4}$ of sec. 26. Over nearly level land, through low undergrowth.

Subdivision of Section 26, T. 13 S., R. 30 E.

CHAINS

9.895 Point for the C-E-SE 1/64 sec. cor. of sec. 26.
Set the iron post 26 ins. in the ground, brass cap mkd.

S26
C-E-SE
1/64
1969

Set a wooden post, 2 x 4 ins., 3 ft. long, alongside the iron post.

19.79 The SE 1/16 sec. cor. of sec. 26.

31.30 Enter moderate undergrowth, bears N. and S.

39.57 The point for the C-S 1/16 sec. cor. of sec. 26.

From the point for the E-E 1/64 sec. cor. of secs. 26 and 35.

N. 0°17' E., on the N. and S. center line of the SE $\frac{1}{4}$ SE $\frac{1}{4}$ of sec. 26.

Over nearly level land, through low undergrowth.

0.25 Graded road, bears S. 89°15' E. and N. 89°15' W.

0.90 Track road, bears S. 70° E. and N. 70° W.

10.05 Point for the SE-SE 1/64 sec. cor. of sec. 26, at intersection with the E. and W. center line of the SE $\frac{1}{4}$ SE $\frac{1}{4}$ of sec. 26; not monumented.

20.10 The C-E-SE 1/64 sec. cor. of sec. 26.

From the S-S 1/64 sec. cor. of secs. 25 and 26.

N. 89°14' W., on the E. and W. center line of the SE $\frac{1}{4}$ SE $\frac{1}{4}$ of sec. 26.

Over nearly level land, through low undergrowth.

4.945 Point for the C-E-SE-SE 1/256 sec. cor. of sec. 26.

Set the iron post 24 ins. in the ground, brass cap mkd.

S26
C-E-SE-SE
1/256
1969

from which

The NW. cor. of Homewood Cemetery, bears S. 8°30' E., 07.5 lks. dist.

Set a wooden post, 2 x 4 ins. squared, 3 ft. long, alongside the iron post.

Subdivision of Section 26, T. 13 S., R. 30 E.

CHAINS	
9.89	The point for the SE-SE 1/64 sec. cor. of sec. 26.
19.77	The point for the C-S-SE 1/64 sec. cor. of sec. 26.
Subdivision of Section 35, T. 13 S., R. 30 E.	
	From the 1/4 sec. cor. of secs. 2 and 35, on the S. bdy. of the Tp., monumented by an iron post 1 in. diam., projecting 6 ins. above ground, brass cap mkd.
	$\begin{array}{c} S35 \\ \frac{1}{4} \\ \hline S 2 \\ 1913 \end{array}$
	N. 1°09' W., on the N. and S. center line of sec. 35. Over nearly level land, through moderate undergrowth.
0.50	Power line, bears E. and W.
40.32	Point for the center 1/4 sec. cor. of sec. 35, at intersection with the E. and W. center line of sec. 35. Set the iron post 24 ins. in the ground, brass cap mkd.
	$\begin{array}{c} C\frac{1}{4} \text{ --- } S35 \\ \\ 1969 \end{array}$
	Set a wooden post, 4 ins. square, 3 ft. long, alongside the iron post.
80.64	The point for the 1/4 sec. cor. of secs. 26 and 35. Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, creosote bush and cat claw.
	From the 1/4 sec. cor. of secs. 35 and 36. N. 89°42' W., on the E. and W. center line of sec. 35. Over nearly level land.
39.97	The center 1/4 sec. cor. of sec. 35.
79.70	Track road, bears N. and S.
79.95	The point for the 1/4 sec. cor. of secs. 34 and 35. Land, nearly level. Soil, sandy clay loam. No timber; undergrowth, creosote bush and cat claw.
General Description	
The elevation of Township 13 South, Range 30 East, ranges	

General Description, T. 13 S., R. 30 E.

CHAINS

from 3,540 to 3,800 ft. above sea level. The land is nearly level throughout the township. The soil is sandy clay loam which supports a moderate growth of creosote bush, cat claw, grass and scattered mesquite.

The Southern Pacific Railroad enters the township at the east boundary of section 25, bears N. 75° W. and leaves the township at the west boundary of section 19. Interstate 10 generally parallels the railroad. Numerous graded and track roads provide good access through the township. San Simon River enters the township at the east boundary of section 12, traverses northwest and leaves at the north boundary of section 2.

The west portion of San Simon, Arizona is located in the southeast quarter of section 25.

The primary use of the land is for grazing, with some areas under cultivation. The general drainage is northeast.

El Paso Gas Co. was constructing an underground gas line in sections 13 through 18 at the time of the survey. This gas line was tied to where the route could be determined.

3
6

CERTIFICATE OF SURVEY

(I) (~~W~~) Gary T. Oviatt, HEREBY
CERTIFY upon honor that, in pursuance of special instructions bearing date of the 20th day
of November, 1968, (I) (~~W~~) have dependently resurveyed a portion of the
east boundary and subdivisional lines and made a survey of subdivisions in
certain sections, Township 13 South, Range 30 East

of the Gila and Salt River Meridian, in the State of Arizona, which
are represented in the foregoing field notes as having been executed by (me), (~~US~~) and under (my)
(~~US~~) direction; and that said survey has been made in strict conformity with said special instruc-
tions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in
specific manner described in the foregoing field notes.

June 1, 1970 _____
(Date) Gary T. Oviatt
(Cadastral Surveyor)

(Date) _____
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date JAN 4 1971

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the dependent resurvey of a portion of the east boundary
and subdivisional lines and the survey of subdivisions in certain sections,
Township 13 South, Range 30 East, of the Gila and Salt River Meridian, Arizona

executed by Gary T. Oviatt
having been critically examined and found correct, are hereby approved.

FEB 22 1972 _____
(Date) Clark F. Hamm
(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in
, is a true copy of the original field notes.~~

~~_____
(Date) _____
(Chief, Division of Cadastral Survey) cpo 249-226~~