

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF A PORTION OF

THE FIFTH STANDARD PARALLEL NORTH,

THROUGH RANGE 3 EAST

AND A PORTION OF THE SUBDIVISION LINES,

AND THE SURVEY OF A PORTION OF THE

SUBDIVISION LINES IN A NUMBER OF SECTIONS

TOWNSHIP 21 NORTH, RANGE 3 EAST

Of the GILA AND SALT RIVER Meridian,

In the State of ARIZONA

EXECUTED BY

MARLIN G. LIVERMORE, II

CADASTRAL SURVEYOR

Under special instructions dated February 16, 1967, which provided for the surveys included under Group Number 490, approved February 16, 1967, and assignment instructions dated May 29, 1969.


Survey commenced June 24, 1969

Survey completed August 8, 1969

1A

BOOK 4929 INDEX DIAGRAM

Township 21 North, Range 3 East,

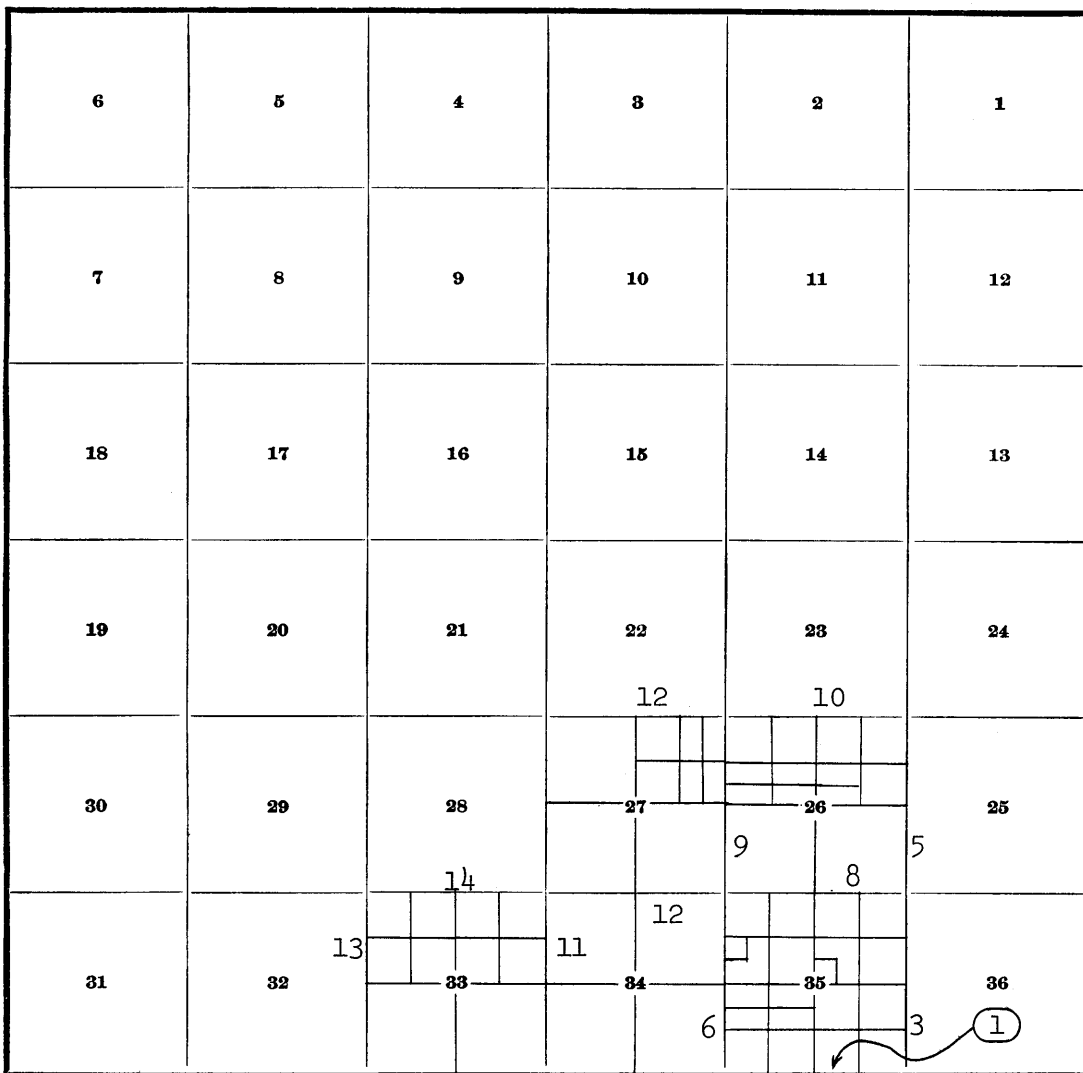

- Subdivision Lines of Section 26 pp. 15-18
- Subdivision Lines of Section 27 pp. 18-21
- Subdivision Lines of Section 33 pp. 21-24
- Subdivision Lines of Section 34 pp. 24-25
- Subdivision Lines of Section 35 pp. 25-31

Township 21 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS

A History of Previous Surveys: The Fifth Standard Parallel North, Range 3 East, was dependently resurveyed by Horace M. Muscott, survey commenced September 24, 1940, completed June 30, 1941. The subdivision lines were dependently resurveyed by Claude F. Warner, in August 1941, as shown upon the official plat, approved January 28, 1946 and accepted July 8, 1946.

The following field notes are those of the dependent resurvey of a portion of the Fifth Standard Parallel North, through Range 3 East (the south boundary of the township) and a portion of the subdivision lines, and the survey of a portion of the subdivision lines in a number of sections, Township 21 North, Range 3 East, Gila and Salt River Meridian, Arizona.

The dependent resurvey and survey were executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and the special instructions dated February 16, 1967.

The directions of all lines of this survey were determined by direct altitude observation on the sun, for azimuth and carried forward by normal transit traverse. Distances are expressed in chains, reduced to horizontal equivalents.

The data furnished with the special instructions give the geographic position of the standard corner of sections 35 and 36, as: Latitude 35° 08.9' N., and Longitude 112° 02.1' W., mean magnetic declination 14½° East.

Dependent Resurvey of a Portion
of the Fifth Standard Parallel North,
Through Range 3 East
Gila and Salt River Meridian, Arizona

Reestablishment of the Survey Executed by
Horace M. Muscott, in 1941

The standard cor. of secs. 35 and 36, which is monumented with an iron post, 2 ins. in diam., firmly set in a mound of stone, 2½ ft. base, 16 ins. high, rebuild same, with regulation brass cap mkd.

S C
T21N R3E
S 35 | S 36

1941

substantiated by:

A pine, 20 ins. in diam., bears N. 55½° E., 57 lks. dist., scribed T21N R3E.

A pine, 14 (record, 18) ins. in diam., bears N. 15½° W., (record, N. 16½° W.), 70 lks. dist., scribing illegible.

Dependent Resurvey of a Portion
of the Fifth Standard Parallel North,
Through Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS		
5.89	<p>S. 89° 52' W., on the Fifth Standard Parallel North, the south boundary of sec. 35.</p> <p>The closing cor. of secs. 1 and 2, Tp. 20 N., R. 3 E., which is monumented with an iron post, 2 ins. in diam., firmly set in a collar of stone, projecting 18 ins. above the ground, with regulation brass cap mkd.</p> <p style="text-align: center;">T21N R3E S 35 S 2 S 1 T20N R3E C C</p> <p style="text-align: center;">1941</p> <p>substantiated by:</p> <p style="padding-left: 40px;">A pine, 22 ins. in diam., bears S. 46° 41' E., 110 (record, 118) lks. dist., scribing illegible.</p> <p>No evidence of other accessories.</p>	
20.09	<p>The point for the standard E 1/16 sec. cor. of sec. 35.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground, and in a mound of stone, 40 in. base, to top, with brass cap mkd.</p> <p style="text-align: center;">S C T21N R3E E 1/16 S 35</p> <p style="text-align: center;">1969</p> <p>from which</p> <p style="padding-left: 40px;">A pine, 4 ins. in diam., bears N. 81¼° E., 56 lks. dist., scribed X BT.</p> <p style="padding-left: 40px;">A pine, 5 ins. in diam., bears N. 29 3/4° W., 51 lks. dist., scribed SC E 1/16 S35 BT.</p>	
40.18	<p>The standard 1/4 sec. cor. of sec. 35, which is monumented with an iron post, 1 in. in diam., firmly set in a mound of stone, 3 ft. base, 26 ins. high, rebuild same, with regulation brass cap mkd.</p> <p style="text-align: center;">S C ¼ S 35</p> <p style="text-align: center;">1941</p> <p>substantiated by:</p> <p style="padding-left: 40px;">A pine, 24 ins. in diam., bears N. 83½° W., (record, N. 86½° W.), 34 lks. dist., scribed 1/4 S35 SC BT.</p> <p>No evidence of other accessories.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89° 40' W., beginning new measurement.</p>	

Dependent Resurvey of a Portion
of the Fifth Standard Parallel North,
Through Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS		
20.06	<p>The point for the standard W 1/16 sec. cor. of sec. 35.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., over a cross (+) chiseled on bedrock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">S C T21N R3E <u>W 1/16 S 35</u></p> <p style="text-align: center;">1969</p> <p>from which</p> <p style="padding-left: 40px;">A pine, 12 ins. in diam., bears N. 61 3/4° E., 16 lks. dist., scribed SC W 1/16 S35 BT.</p> <p style="padding-left: 40px;">A pine, 5 ins. in diam., bears N. 66° W., 28 lks. dist., scribed W 1/16 S35 BT.</p>	
40.12	<p>The standard cor. of secs. 34 and 35, which is monumented with an iron post, 2 ins. in diam., firmly set in a mound of stone, 3 ft. base, 18 ins. high, rebuild same, with regulation brass cap mkd.</p> <p style="text-align: center;">S C T21N R3E <u>S 34 S 35</u></p> <p style="text-align: center;">1941</p> <p>substantiated by:</p> <p style="padding-left: 40px;">A pine, 14 ins. in diam., bears N. 33½° E., (record, N. 28° E.), 147 lks. dist., scribed T21N R3E S35 SC BT.</p> <p>No evidence of other accessories.</p> <p>Discontinue the dependent resurvey of this standard parallel at this corner point.</p>	
	<p>Dependent Resurvey of a Portion of the Subdivision Lines Township 21 North, Range 3 East Gila and Salt River Meridian, Arizona</p>	
20.24	<p style="text-align: center;">Reestablishment of the Survey Executed by Claude F. Warner, in 1941</p> <hr style="width: 30%; margin: auto;"/> <p>From the standard cor. of secs. 35 and 36, N. 0° 52' W., between secs. 35 and 36.</p> <p>The point for the S 1/16 sec. cor. of secs. 35 and 36.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.</p>	

Dependent Resurvey of a Portion
of the Subdivision Lines
Township 21 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS		
	<p style="text-align: center;">T21N R3E S 1/16 S 35 S 36</p> <p style="text-align: center;">1969</p> <p>from which</p> <p style="padding-left: 40px;">A pine, 14 ins. in diam., bears S. $37\frac{1}{4}^{\circ}$ W., 155 lks. dist., scribed S 1/16 S35 BT.</p> <p>No other suitable accessory available.</p> <p>40.48 The 1/4 sec. cor. of secs. 35 and 36, which is monumented with an iron post, 1 in. in diam., firmly set, and in a mound of stone, 30 in. base, 18 ins. high, rebuild same, with regulation brass cap mkd.</p> <p style="text-align: center;">$\frac{1}{4}$ S 35 S 36</p> <p style="text-align: center;">1941</p> <p>substantiated by:</p> <p style="padding-left: 40px;">A pine, 10 ins. in diam., bears S. 62° W. (record, S. 58° W.), 30 lks. dist., scribing illegible.</p> <p>No evidence of other accessories.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. $0^{\circ} 20'$ W., beginning new measurement.</p>	
	<p>20.07 The point for the N 1/16 sec. cor. of secs. 35 and 36.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 10 ins. in the ground, and in a mound of stone, 42 in. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E N 1/16 S 35 S 36</p> <p style="text-align: center;">1969</p> <p>from which</p> <p style="padding-left: 40px;">A pine, 24 ins. in diam., bears S. $88\frac{1}{2}^{\circ}$ E., 42 lks. dist., scribed N 1/16 S36 BT.</p> <p style="padding-left: 40px;">A pine, 24 ins. in diam., bears S. $79\frac{1}{2}^{\circ}$ W., 58 lks. dist., scribed N 1/16 S35 BT.</p>	
	<p>40.14 The cor. of secs. 25, 26, 35, and 36, which is monumented with an iron post, 2 ins. in diam., firmly set, projecting 10 ins. above the ground, with regulation brass cap mkd.</p> <p style="text-align: center;">T21N R3E S 26 S 25 S 35 S 36</p> <p style="text-align: center;">1941</p>	

Dependent Resurvey of a Portion
of the Subdivision Lines
Township 21 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS	
	<p>No evidence of the corner accessories.</p> <hr/> <p>N. 0° 10' W., between secs. 25 and 26.</p> <p>40.12 The 1/4 sec. cor. of secs. 25 and 26, which is monumented with an iron post, 1 in. in diam., firmly set, and in a mound of stone, 4 ft. base, 26 ins. high, rebuild same, with regulation brass cap mkd.</p> <p style="text-align: center;">T21N R3E ¼ S 26 S 25</p> <p style="text-align: center;">1969 1941</p> <p>I added the township, range, and the 1969 date to the above brass cap.</p> <p>substantiated by:</p> <p style="padding-left: 40px;">A pine, 12 ins. in diam., bears N. 1½° E., 31 lks. dist., blazed face, scribing illegible. This bearing tree is not of record.</p> <p style="padding-left: 40px;">A pine, 10 ins. in diam., bears N. 34° W., (record, N. 38½° W.), 81 lks. dist., scribing illegible.</p> <hr style="width: 20%; margin: 20px auto;"/> <p>N. 0° 26' W., beginning new measurement.</p> <p>19.97 The point for the N 1/16 sec. cor. of secs. 25 and 26.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 16 ins. in the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E N 1/16 S 26 S 25</p> <p style="text-align: center;">1969</p> <p>from which</p> <p style="padding-left: 40px;">A pine, 8 ins. in diam., bears S. 82¼° E., 30 lks. dist., scribed N 1/16 S25 BT.</p> <p style="padding-left: 40px;">A pine, 6 ins. in diam., bears S. 5¼° W., 18 lks. dist., scribed N 1/16 S26 BT.</p> <p>39.94 The cor. of secs. 23, 24, 25, and 26, which is monumented with an iron post, 2 ins. in diam., firmly set, projecting 12 ins. above the ground, and in a collar of stone, with regulation brass cap mkd.</p> <p style="text-align: center;">T21N R3E S 23 S 24 S 26 S 25</p> <p style="text-align: center;">1941</p>

Dependent Resurvey of a Portion
of the Subdivision Lines
Township 21 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS	
	<p>substantiated by:</p> <p>A pine, 14 (record, 18) ins. in diam., bears N. 78° E. (record, N. 75° E.), 40 lks. dist., scribing illegible.</p> <p>A pine, 30 ins. in diam., bears S. 32° E., 7 lks. dist., scribing illegible.</p> <p>A pine, 30 ins. in diam., bears S. 63° W. (record, S. 66° W.), 23 lks. dist., scribed TXXLN R11E SXXV</p> <p>A pine, 14 ins. in diam., bears N. 40 3/4° W., 111 lks. dist. (record, N. 42 1/2° W., 106 lks. dist.), scribing illegible.</p>
20.11	<p>From the standard cor. of secs. 34 and 35, on the south boundary of the township,</p> <p>N. 0° 29' W., between secs. 34 and 35.</p> <p>The point for the S 1/16 sec. cor. of secs. 34 and 35.</p> <p>Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 10 ins. in the ground, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E S 1/16 S 34 S 35</p> <p style="text-align: center;">1969</p> <p>from which</p> <p>A pine, 10 ins. in diam., bears N. 48 1/2° E., 64 lks. dist., scribed S 1/16 S35 BT.</p> <p>A pine, 10 ins. in diam., bears S. 31 3/4° W., 6 lks. dist., scribed S 1/16 S34 BT.</p>
30.165	<p>The point for the N-S 1/64 sec. cor. of secs. 34 and 35.</p> <p>Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 10 ins. in the ground, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">N S 1/64 S 34 S 35</p> <p style="text-align: center;">1969</p> <p>No suitable accessories available.</p>
40.22	<p>The 1/4 sec. cor. of secs. 34 and 35, which is monumented with an iron post, 1 in. in diam., firmly set, and in a mound of stone, 3 1/2 ft. base, 16 ins. high, rebuild same, with regulation brass cap mkd.</p> <p style="text-align: center;">1/4 S 34 S 35</p> <p style="text-align: center;">1941</p>

Dependent Resurvey of a Portion
of the Subdivision Lines
Township 21 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS		
	No evidence of the corner accessories.	
	N. 0° 33' W., beginning new measurement.	
10.05	The point for the S-N 1/64 sec. cor. of secs. 34 and 35.	
	Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.	
	S N 1/64	
	S 34 S 35	
	1969	
	No suitable accessories available.	
20.10	The point for the N 1/16 sec. cor. of secs. 34 and 35.	
	Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.	
	T21N R3E	
	N 1/16	
	S 34 S 35	
	1969	
	from which	
	A pine, 10 ins. in diam., bears N. 54¼° E., 45 lks. dist., scribed N 1/16 S35 BT.	
	A pine, 6 ins. in diam., bears N. 77 ¾° W., 41 lks. dist., scribed N 1/16 S34 BT.	
40.20	The cor. of secs. 26, 27, 34, and 35, which is monumented with an iron post, 2 ins. in diam., firmly set, and in a mound of stone, 3½ ft. base, 14 ins. high, rebuild same, with regulation brass cap mkd.	
	T21N R3E	
	S 27 S 26	
	S 34 S 35	
	1941	
	substantiated by:	
	A pine, 20 ins. in diam., bears N. 25° E., 73 lks. dist., scribed T21N R3E S26 BT.	
	A pine, 12 ins. in diam., bears S. 53 ¾° E., 83 lks. dist., scribing illegible.	
	A pine, 36 ins. in diam., bears S. 33½° W., 44 lks. dist., scribing illegible.	
	A pine, 34 ins. in diam., bears S. 63° W. (record, S. 64½° W.), 17 lks. dist., scribing illegible.	

Dependent Resurvey of a Portion
of the Subdivision Lines
Township 21 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS		
	<p>From the cor. of secs. 25, 26, 35, and 36, S. 89° 44' W., between secs. 26 and 35.</p> <p>20.03 The point for the E 1/16 sec. cor. of secs. 26 and 35.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 15 ins. in the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E E 1/16 $\frac{S\ 26}{S\ 35}$</p> <p style="text-align: center;">1969</p> <p>from which</p> <p style="padding-left: 40px;">A pine, 12 ins. in diam., bears N. 31° E., 63 lks. dist., scribed E 1/16 S26 BT.</p> <p style="padding-left: 40px;">A pine, 15 ins. in diam., bears S. 51¼° E., 47 lks. dist., scribed E 1/16 S35 BT.</p>	
	<p>40.06 The 1/4 sec. cor. of secs. 26 and 35, which is monumented with an iron post, 1 in. in diam., firmly set, and in a collar of stone, projecting 10 ins. above the ground, with regulation brass cap mkd.</p> <p style="text-align: center;">$\frac{1}{4}$ $\frac{S\ 26}{S\ 35}$</p> <p style="text-align: center;">1941</p> <p>substantiated by:</p> <p style="padding-left: 40px;">A pine, 14 ins. in diam., bears N. 24° E., 220 lks. dist., scribed 1/4 S26 BT.</p> <p style="padding-left: 40px;">A pine, 24 ins. in diam., bears S. 40 3/4° E., 103 lks. dist., scribed 1/4 S35 BT.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89° 34' W., beginning new measurement.</p>	
	<p>20.04 The point for the W 1/16 sec. cor. of secs. 26 and 35.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, and in a mound of stone, 2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E W 1/16 $\frac{S\ 26}{S\ 35}$</p> <p style="text-align: center;">1969</p> <p>from which</p> <p style="padding-left: 40px;">A pine, 8 ins. in diam., bears S. 59½° W., 20 lks. dist., scribed W 1/16 S35 BT.</p>	

Dependent Resurvey of a Portion
of the Subdivision Lines
Township 21 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS	
	No other suitable accessory available.
40.08	The cor. of secs. 26, 27, 34, and 35.
	N. 0° 19' W., between secs. 26 and 27.
40.26	The 1/4 sec. cor. of secs. 26 and 27, which is monumented with an iron post, 1 in. in diam., firmly set, and in a mound of stone, 3 ft. base, 14 ins. high, rebuild same, with regulation brass cap mkd.
	$\frac{1}{4}$ S 27 S 26
	1941
	substantiated by:
	A pine, 26 ins. in diam., bears S. 85 $\frac{1}{4}$ ° E., 177 lks. dist. (record, 30 ins. in diam., bears S. 85° E., 175 lks. dist.), scribed 1/4 S26 BT.
	A pine stump, 36 ins. in diam., bears N. 41 3/4° W., 193 lks. dist. (record, 40 ins. in diam., bears N. 43 $\frac{1}{2}$ ° W., 192 lks. dist.), scribing illegible.
	<hr style="width: 20%; margin: auto;"/> N. 0° 19' W., beginning new measurement.
10.00	The point for the S-N 1/64 sec. cor. of secs. 26 and 27.
	Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.
	S N 1/64 S 27 S 26
	1969
	No suitable accessories available.
20.00	The point for the N 1/16 sec. cor. of secs. 26 and 27.
	Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 22 ins. in the ground, with brass cap mkd.
	T21N R3E N 1/16 S 27 S 26
	1969
	No suitable accessories available.
40.00	The cor. of secs. 22, 23, 26, and 27, which is monumented with an iron post, 2 ins. in diam., firmly set, projecting 10 ins. above the ground, with regulation brass cap mkd.

Dependent Resurvey of a Portion
of the Subdivision Lines
Township 21 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS		
20.00	<p style="text-align: center;">T21N R3E S 22 S 23 S 27 S 26</p> <p style="text-align: center;">1941</p> <p>substantiated by:</p> <p>A pine, 30 (record, 40) ins. in diam., bears N. 2° E., 73 (record, 71) lks. dist., scribed T21N R3E S23 BT.</p> <p>A pine, 18 ins. in diam., bears S. 47° E., 74 lks. dist., scribed T21N R3E S26 BT.</p> <p>A pine, 38 (record, 40) ins. in diam., bears S. 53 3/4° W., 118 lks. dist. (record, S. 53 1/2° W., 116 lks. dist.), scribed T21N R3E S27 BT.</p> <p>A pine, 26 (record, 36) ins. in diam., bears N. 43° W., 83 lks. dist. (record, N. 43 1/2° W., 82 lks. dist.), scribing illegible.</p> <hr/> <p>From the cor. of secs. 23, 24, 25, and 26, S. 89° 26' W., between secs. 23 and 26.</p> <p>The point for the E 1/16 sec. cor. of secs. 23 and 26.</p> <p>Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E E 1/16 S 23 S 26</p> <p style="text-align: center;">1969</p> <p>from which</p> <p>A pine, 6 ins. in diam., bears N. 46° E., 14 lks. dist., scribed E 1/16 S23 BT.</p> <p>A pine, 4 ins. in diam., bears S. 49 1/4° E., 30 lks. dist., scribed X BT.</p>	40.00
	<p style="text-align: center;">T21N R3E 1/4 S 23 S 26</p> <p style="text-align: center;">1969 1941</p> <p>I added the township, range, and 1969 date to the above brass cap.</p> <p>substantiated by:</p>	

Dependent Resurvey of a Portion
of the Subdivision Lines
Township 21 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A pine, 10 ins. in diam., bears N. $52\frac{3}{4}^{\circ}$ W., 180 (record, 179) lks. dist., scribing illegible.</p> <p>No evidence of other accessories.</p> <hr/> <p>N. $89^{\circ} 52'$ W., beginning new measurement.</p> <p>20.11 The point for the W 1/16 sec. cor. of secs. 23 and 26. This corner point is located within private land; the landowner did not grant permission for the monumentation of the corner.</p> <p>40.22 The cor. of secs. 22, 23, 26, and 27.</p>
	<p>The 1/4 sec. cor. of secs. 33 and 34, which is monumented with an iron post, 1 in. in diam., firmly set, projecting 12 ins. above the ground, with regulation brass cap mkd.</p> <p style="text-align: center;">$\frac{1}{4}$ S 33 S 34 1941</p> <p>substantiated by:</p> <p>A pine, 16 ins. in diam., bears N. $54\frac{3}{4}^{\circ}$ E., 20 lks. dist. (record, N. 48° E., 19 lks. dist.), scribing illegible.</p> <p>A pine, 16 ins. in diam., bears S. $80\frac{1}{2}^{\circ}$ W. (record, S. 75° W.), 18 lks. dist., scribing illegible.</p> <hr/> <p>N. $0^{\circ} 36'$ W., between secs. 33 and 34.</p> <p>20.04 The point for the N 1/16 sec. cor. of secs. 33 and 34.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E N 1/16 S 33 S 34 1969</p> <p>from which</p> <p>A pine, 8 ins. in diam., bears S. $88\frac{1}{2}^{\circ}$ E., 7 lks. dist., scribed N 1/16 S34 BT.</p> <p>A pine, 8 ins. in diam., bears S. $50\frac{1}{2}^{\circ}$ W., 21 lks. dist., scribed N 1/16 S33 BT.</p> <p>40.08 The cor. of secs. 27, 28, 33, and 34, which is monumented with an iron post, 2 ins. in diam., firmly set, projecting 10 ins. above the ground, with regulation brass cap mkd.</p> <p style="text-align: center;">T21N R3E S 28 S 27 S 33 S 34 1941</p>

Dependent Resurvey of a Portion
of the Subdivision Lines
Township 21 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS		
	<p>substantiated by:</p> <p>A pine, 36 ins. in diam., bears N. $46\frac{1}{2}^\circ$ E., 78 lks. dist. (record, N. 46° E., 79 lks. dist.), scribing illegible.</p> <p>A pine, 16 ins. in diam., bears S. $54\frac{3}{4}^\circ$ E., 91 lks. dist. (record, S. $54\frac{1}{2}^\circ$ E., 67 lks. dist.), scribing illegible.</p> <p>A pine, 20 ins. in diam., bears S. $57\frac{1}{4}^\circ$ W., 67 lks. dist. (record, S. 57° W., 91 lks. dist.), scribing illegible.</p> <p>A pine, 20 ins. in diam., bears N. 16° W., 67 lks. dist. (record, 28 ins. in diam., N. $16\frac{1}{2}^\circ$ W., 68 lks. dist.), scribing illegible.</p>	
40.41	<p>From the cor. of secs. 26, 27, 34, and 35, S. $88^\circ 59'$ W., between secs. 27 and 34.</p> <p>The $\frac{1}{4}$ sec. cor. of secs. 27 and 34, which is marked with an iron pipe, $\frac{1}{2}$ in. in diam., firmly set, projecting 30 ins. above the ground, and in a small mound of stone. I did not remonument this corner point.</p> <p>substantiated by:</p> <p>A (dead) pine, 38 ins. in diam., bears S. 10° E., 32 lks. dist., scribed $\frac{1}{4}$ S.</p> <p>A pine, 8 ins. in diam., bears S. 73° W., 6 lks. dist., scribed $\frac{1}{4}$ S 34 BT.</p>	
10.01	<p>From the cor. of secs. 22, 23, 26, and 27, S. $89^\circ 45'$ W., between secs. 22 and 27.</p> <p>The point for the E-E $\frac{1}{64}$ sec. cor. of secs. 22 and 27.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 10 ins. in the ground, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">E E $\frac{1}{64}$ <u>S 22</u> S 27</p> <p style="text-align: center;">1969</p> <p>No suitable accessories available.</p>	
20.02	<p>The point for the E $\frac{1}{16}$ sec. cor. of secs. 22 and 27.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E E $\frac{1}{16}$ <u>S 22</u> S 27</p> <p style="text-align: center;">1969</p>	

Dependent Resurvey of a Portion
of the Subdivision Lines
Township 21 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS	
40.04	<p>from which</p> <p>An oak, 10 ins. in diam., bears N. 23 3/4° E., 78 lks. dist., scribed E 1/16 S22 BT.</p> <p>A pine, 12 ins. in diam., bears S. 14 1/2° W., 46 lks. dist., scribed E 1/16 S27 BT.</p> <p>The 1/4 sec. cor. of secs. 22 and 27, which is monumented with an iron post, 1 in. in diam., firmly set, projecting 10 ins. above the ground, with regulation brass cap mkd.</p> <p style="text-align: center;">1/4 S 22 S 27</p> <p style="text-align: center;">1941</p> <p>No evidence of the corner accessories.</p>
20.04	<p>The 1/4 sec. cor. of secs. 32 and 33, which is monumented with an iron post, 1 in. in diam., firmly set, projecting 8 ins. above the ground, with regulation brass cap mkd.</p> <p style="text-align: center;">1/4 S 32 S 33</p> <p style="text-align: center;">1941</p> <p>substantiated by:</p> <p>A pine, 8 ins. in diam., bears S. 48 3/4° E., 67 lks dist., scribed 1/4 SEC 33 BT.</p> <p>A pine, 10 ins. in diam., bears N. 52° W., 138 lks. dist., scribed 1/4 SEC 32 BT.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 42' W., between secs. 32 and 33.</p> <p>The point for the N 1/16 sec. cor. of secs. 32 and 33.</p> <p>Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E N 1/16 S 32 S 33</p> <p style="text-align: center;">1969</p> <p>from which</p> <p>A pine, 20 ins. in diam., bears N. 17 1/2° E., 92 lks. dist., scribed N 1/16 S33 BT.</p> <p>A pine, 18 ins. in diam., bears N. 60° W., 135 lks. dist., scribed N 1/16 S32 BT.</p> <p>40.08 The cor. of secs. 28, 29, 32, and 33, which is monumented with an iron post, 2 ins. in diam., firmly set, projecting 12 ins. above the ground, with regulation brass cap mkd.</p>

Dependent Resurvey of a Portion
of the Subdivision Lines
Township 21 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS		
	<p style="text-align: center;">T21N R3E <u>S 29 S 28</u> <u>S 32 S 33</u></p> <p style="text-align: center;">1941</p> <p>substantiated by:</p> <p>A pine, 30 ins. in diam., bears N. 28 3/4° E., 28 lks. dist., scribing illegible.</p> <p>A pine, 36 ins. in diam., bears S. 40° E., 20 lks. dist., scribing illegible.</p> <p>A pine, 18 ins. in diam., bears S. 67 3/4° W., 31 lks. dist., scribing illegible.</p> <p>A pine, 10 ins. in diam., bears N. 39 3/4° W., 151 lks. dist., scribing illegible.</p>	
20.00	<p>From the cor. of secs. 27, 28, 33, and 34, S. 89° 49' W., between secs. 28 and 33.</p> <p>The point for the E 1/16 sec. cor. of secs. 28 and 33.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E E 1/16 <u>S 28</u> <u>S 33</u></p> <p style="text-align: center;">1969</p> <p>from which</p> <p>A pine, 16 ins. in diam., bears N. 49¼° E., 67 lks. dist., scribed E 1/16 SEC 28 BT.</p> <p>A pine, 18 ins. in diam., bears S. 51 3/4° W., 47 lks. dist., scribed E 1/16 SEC 33 BT.</p>	
40.00	<p>The 1/4 sec. cor. of secs. 28 and 33, which is monumented with an iron post, 1 in. in diam., firmly set, projecting 12 ins. above the ground, and in a small mound of stone, with regulation brass cap mkd.</p> <p style="text-align: center;">¼ <u>S 28</u> <u>S 33</u></p> <p style="text-align: center;">1941</p> <p>substantiated by:</p> <p>A pine, 10 ins. in diam., bears S. 18½° E., 52 lks. dist., scribing illegible.</p> <p>A pine, 10 ins. in diam., bears N. 12½° W., 95 lks. dist., scribing illegible.</p> <hr style="width: 20%; margin: 10px auto;"/>	

Dependent Resurvey of a Portion
of the Subdivision Lines
Township 21 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS		
<p>20.10</p>	<p>S. 89° 16' W., beginning new measurement.</p> <p>The point for the W 1/16 sec. cor. of secs. 28 and 33.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E W 1/16 $\frac{S\ 28}{S\ 33}$</p> <p style="text-align: center;">1969</p> <p>from which</p> <p style="padding-left: 40px;">A pine, 14 ins. in diam., bears N. 52½° E., 12 lks. dist., scribed W 1/16 S28 BT.</p> <p style="padding-left: 40px;">A pine, 20 ins. in diam., bears S. 16° W., 93 lks. dist., scribed W 1/16 S33 BT.</p>	
	<p>The Survey of a Portion of the Subdivision Lines in a Number of Sections Township 21 North, Range 3 East Gila and Salt River Meridian, Arizona</p>	
<p>40.16</p> <p>50.09</p>	<p>The cor. of secs. 28, 29, 32, and 33.</p> <hr/> <p>Thence, in section 26.</p> <p>From the 1/4 sec. cor. of secs. 26 and 35.</p> <p>N. 0° 14' W., on the N. and S. center line of sec. 26.</p> <p>Intersect the E. and W. center line, the point for the center 1/4 sec. cor. of sec. 26.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 16 ins. in the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E C ¼ S 26</p> <p style="text-align: center;">1969</p> <p>from which</p> <p style="padding-left: 40px;">A pine, 12 ins. in diam., bears S. 75 3/4° E., 111 lks. dist., scribed C 1/4 S26 BT.</p> <p style="padding-left: 40px;">A pine, 24 ins. in diam., bears S. 31½° E., 32 lks. dist., scribed C 1/4 S26 BT.</p> <p>The point for the C-S-N 1/64 sec. cor. of sec. 26.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, and in a mound of stone, 2½ ft. base, to top, with brass cap mkd.</p>	

The Survey of a Portion of the
 Subdivision Lines in a Number of Sections
 Township 21 North, Range 3 East
 Gila and Salt River Meridian, Arizona

CHAINS		
60.02	<p style="text-align: center;">C S N 1/64 S 26</p> <p style="text-align: center;">1969</p> <p>No suitable accessories available.</p> <p>The point for the C-N 1/16 sec. cor. of sec. 26.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>	
79.88	<p style="text-align: center;">T21N R3E C N 1/16 S 26</p> <p style="text-align: center;">1969</p> <p>No suitable accessories available.</p> <p>The 1/4 sec. cor. of secs. 23 and 26.</p>	
20.07	<p>From the 1/4 sec. cor. of secs. 25 and 26, S. 89° 45' W., on the E. and W. center line of sec. 26.</p> <p>The point for the C-E 1/16 sec. cor. of sec. 26.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E C E 1/16 S 26</p> <p style="text-align: center;">1969</p> <p>from which</p> <p style="padding-left: 40px;">A pine, 7 ins. in diam., bears S. 61 3/4° W., 50 lks. dist., scribed C E 1/16 S26 BT.</p> <p style="padding-left: 40px;">A pine, 9 ins. in diam., bears N. 5° W., 6 lks. dist., scribed C E 1/16 S26 BT.</p>	
40.14	<p>Intersect the N. and S. center line, the center 1/4 sec. cor. of sec. 26.</p>	
60.23	<p>The point for the C-W 1/16 sec. cor. of sec. 26.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 14 ins. in the ground, and in a mound of stone, 2½ ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E C W 1/16 S 26</p> <p style="text-align: center;">1969</p>	

The Survey of a Portion of the
Subdivision Lines in a Number of Sections
Township 21 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS	from which
80.32	<p>A pine, 6 ins. in diam., bears N. 27 3/4° E., 21 lks. dist., scribed C W 1/16 S26 BT.</p> <p>A pine, 6 ins. in diam., bears N. 72 1/2° W., 39 lks. dist., scribed C W 1/16 S26 BT.</p> <p>The 1/4 sec. cor. of secs. 26 and 27.</p>
9.965	<p>From the C-E 1/16 sec. cor. of sec. 26.</p> <p>N. 0° 19' W., on the N. and S. center line of the NE 1/4 of sec. 26.</p> <p>The point for the C-S-NE 1/64 sec. cor. of sec. 26.</p> <p>Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">C S NE 1/64 S 26</p> <p style="text-align: center;">1969</p> <p>raise a mound of stone, 3 ft. base, 2 ft. high, W. of the corner.</p> <p>No other suitable accessory available.</p>
19.93	<p>Intersect the E. and W. center line of the NE 1/4, the point for the NE 1/16 sec. cor. of sec. 26.</p> <p>Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 18 ins. in the ground, and in a mound of stone, 2 1/2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E NE 1/16 S 26</p> <p style="text-align: center;">1969</p> <p>No other suitable accessory available.</p>
39.84	<p>The E 1/16 sec. cor. of secs. 23 and 26.</p> <p>From the N 1/16 sec. cor. of secs. 25 and 26,</p> <p>S. 89° 39' W., on the E. and W. center line of the NE 1/4 of sec. 26.</p>
20.04	<p>Intersect the N. and S. center line of the NE 1/4, the NE 1/16 sec. cor. of sec. 26.</p>
40.08	<p>Intersect the N. and S. center line, the C-N 1/16 sec. cor. of sec. 26.</p>
20.055	<p>From the C-S-NE 1/64 sec. cor. of sec. 26.</p> <p>S. 89° 42' W., on the E. and W. center line of the SW 1/4, NE 1/4 of sec. 26.</p> <p>Intersect the N. and S. center line, the C-S-N 1/64 sec. cor. of sec. 26.</p>

The Survey of a Portion of the
 Subdivision Lines in a Number of Sections
 Township 21 North, Range 3 East
 Gila and Salt River Meridian, Arizona

CHAINS	From the C-W 1/16 sec. cor. of sec. 26.
	N. 0° 17' W., on the N. and S. center line of the NW 1/4 of sec. 26.
9.96	The point for the C-S-NW 1/64 sec. cor. of sec. 26.
	Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, and in a mound of stone, 2½ ft. base, to top, with brass cap mkd.
	C S NW 1/64 S 26
	1969
	No other suitable accessory available.
19.92	Intersect the E. and W. center line of the NW 1/4, the point for the NW 1/16 sec. cor. of sec. 26.
	Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T21N R3E NW 1/16 S 26
	1969
	No suitable accessories available.
39.86	The point for the W 1/16 sec. cor. of secs. 23 and 26.
	From the C-N 1/16 sec. cor. of sec. 26,
	S. 89° 55' W., on the E. and W. center line of the NW 1/4 of sec. 26.
20.09	Intersect the N. and S. center line of the NW 1/4, the NW 1/16 sec. cor. of sec. 26.
40.19	The N 1/16 sec. cor. of secs. 26 and 27.
	From the C-S-N 1/64 sec. cor. of sec. 26,
	S. 89° 50' W., on the E. and W. center line of the SE 1/4, NW 1/4 of sec. 26.
20.09	Intersect the N. and S. center line of the NW 1/4, the C-S-NW 1/64 sec. cor. of sec. 26.
	S. 89° 50' W., beginning new measurement, on the E. and W. center line of the SW 1/4, NW 1/4 of sec. 26.
20.09	The S-N 1/64 sec. cor. of secs. 26 and 27.
	Thence, in section 27.
	From the 1/4 sec. cor. of secs. 27 and 34,
	N. 0° 06' W., on the N. and S. center line of sec. 27.
40.84	Intersect the E. and W. center line, the point for the center 1/4 sec. cor. of sec. 27.

The Survey of a Portion of the
Subdivision Lines in a Number of Sections
Township 21 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS		
	<p>Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E C ¼ S 27</p> <p style="text-align: center;">1969</p> <p>from which</p> <p style="padding-left: 40px;">A pine, 14 ins. in diam., bears N. 68¼° E., 46 lks. dist., scribed C 1/4 S27 BT.</p> <p style="padding-left: 40px;">A pine, 8 ins. in diam., bears S. 59 3/4° W., 51 lks. dist., scribed C 1/4 S27 BT.</p>	
60.83	<p>The point for the C-N 1/16 sec. cor. of sec. 27.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E C N 1/16 S 27</p> <p style="text-align: center;">1969</p> <p>raise a mound of stone, 2½ ft. base, 2 ft. high, W. of the corner.</p> <p>from which</p> <p style="padding-left: 40px;">A pine, 8 ins. in diam., bears S. 29¼° E., 29 lks. dist., scribed C N 1/16 S27 BT.</p> <p style="padding-left: 40px;">A pine, 8 ins. in diam., bears N. 26½° W., 61 lks. dist., scribed C N 1/16 S27 BT.</p>	
80.82	<p>The 1/4 sec. cor. of secs. 22 and 27.</p>	
10.04	<p>From the 1/4 sec. cor. of secs. 26 and 27, S. 89° 49' W., on the E. and W. center line of sec. 27.</p> <p>The point for the C-E-E 1/64 sec. cor. of sec. 27.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">C E E 1/64 S 27</p> <p style="text-align: center;">1969</p> <p>No suitable accessories available.</p>	
20.08	<p>The point for the C-E 1/16 sec. cor. of sec. 27.</p>	

The Survey of a Portion of the
 Subdivision Lines in a Number of Sections
 Township 21 North, Range 3 East
 Gila and Salt River Meridian, Arizona

CHAINS		
	<p>Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E C E 1/16 S 27</p> <p style="text-align: center;">1969</p> <p>from which</p> <p style="padding-left: 40px;">A pine, 8 ins. in diam., bears N. 42¼° E., 47 lks. dist., scribed C E 1/16 S27 BT.</p> <p style="padding-left: 40px;">A pine, 12 ins. in diam., bears S. 13½° E., 13 lks. dist., scribed C E 1/16 S27 BT.</p>	
40.16	<p>Intersect the N. and S. center line, the center 1/4 sec. cor. of sec. 27.</p>	
80.57	<p>The 1/4 sec. cor. of secs. 27 and 28, which is monumented with an iron post, 1 in. in diam., firmly set, projecting 8 ins. above the ground, with regulation brass cap mkd.</p> <p style="text-align: center;">¼ S 28 S 27</p> <p style="text-align: center;">1941</p> <p>substantiated by:</p> <p style="padding-left: 40px;">A pine, 8 ins. in diam., bears N. 43° E., 38 lks. dist., scribed 1/4 S27 BT.</p> <p style="padding-left: 40px;">A pine, 15 ins. in diam., bears S. 47° W., 36 lks. dist., scribed 1/4 S28 BT.</p>	
20.00	<p>From the C-E 1/16 sec. cor. of sec. 27.</p> <p>N. 0° 11' W., on the N. and S. center line of the NE 1/4 of sec. 27.</p> <p>Intersect the E. and W. center line of the NE 1/4, the point for the NE 1/16 sec. cor. of sec. 27.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E NE 1/16 S 27</p> <p style="text-align: center;">1969</p> <p>from which</p> <p style="padding-left: 40px;">A pine, 10 ins. in diam., bears S. 14½° W., 70 lks. dist., scribed NE 1/16 S27 BT.</p>	

The Survey of a Portion of the
 Subdivision Lines in a Number of Sections
 Township 21 North, Range 3 East
 Gila and Salt River Meridian, Arizona

CHAINS	<p>A pine, 14 ins. in diam., bears N. $11\frac{1}{4}^{\circ}$ W., 36 lks. dist., scribed NE 1/16 S27 BT.</p>
39.97	<p>The E 1/16 sec. cor. of secs. 22 and 27.</p> <hr/> <p>From the N 1/16 sec. cor. of secs. 26 and 27, S. $89^{\circ} 47'$ W., on the E. and W. center line of the NE 1/4 of sec. 27.</p>
10.02	<p>The point for the C-E-NE 1/64 sec. cor. of sec. 27.</p> <p>Set a copper-coated steel stake, 30 ins. long, 1/2 in. in diam., with brass cap 8 ins. below the surface of the road, with brass cap, $1\frac{1}{2}$ ins. in diam., mkd.</p> <p style="text-align: center;">C E NE 1/64 S 27 1969</p> <p>from which</p> <p>An iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., set 20 ins. in the ground, for a reference monument, bears S. $75\frac{3}{4}^{\circ}$ W., 28.6 ft. dist., with brass cap mkd. RM C E NE 1/64 S27 28.6 FT 1969, and an arrow pointing to the true corner point.</p> <p>An iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., set 22 ins. in the ground, for a reference monument, bears N. 39° W., 18.4 ft. dist., with brass cap mkd. RM C E NE 1/64 S27 18.4 FT 1969, and an arrow pointing to the true corner point.</p>
20.04	<p>Intersect the N. and S. center line of the NE 1/4, the NE 1/16 sec. cor. of sec. 27.</p>
40.09	<p>Intersect the N. and S. center line, the C-N 1/16 sec. cor. of sec. 27.</p> <hr/> <p>From the C-E-E 1/64 sec. cor. of sec. 27, N. $0^{\circ} 15'$ W., on the N. and S. center line of the SE 1/4, NE 1/4 of sec. 27.</p>
20.00	<p>Intersect the E. and W. center line of the NE 1/4, the C-E-NE 1/64 sec. cor. of sec. 27.</p> <hr/> <p>N. $0^{\circ} 15'$ W., beginning new measurement, on the N. and S. center line of the NE 1/4, NE 1/4 of sec. 27.</p>
19.99	<p>The E-E 1/64 sec. cor. of secs. 22 and 27.</p> <hr/> <p>Thence, in section 33.</p> <p>The standard 1/4 sec. cor. of sec. 33, on the south boundary of the township, which is monumented with an iron post, 1 in. in diam., firmly set, projecting 14 ins. above the ground, and in a collar of stone, with regulation brass cap mkd.</p>

The Survey of a Portion of the
 Subdivision Lines in a Number of Sections
 Township 21 North, Range 3 East
 Gila and Salt River Meridian, Arizona

CHAINS		
	<p style="text-align: center;">S C $\frac{1}{4}$ S 33 1941</p> <hr style="width: 20%; margin: auto;"/>	
<p>39.96</p>	<p>N. 0° 32' W., on the N. and S. center line of sec. 33. Intersect the E. and W. center line, the point for the center 1/4 sec. cor. of sec. 33. Set an iron post, 30 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E C $\frac{1}{4}$ S 33 1969</p> <p>raise a mound of stone, 2½ ft. base, 2 ft. high, W. of the corner. from which</p> <p style="padding-left: 40px;">A pine, 24 ins. in diam., bears S. 45° W., 48 lks. dist., scribed C 1/4 S33 BT. A pine, 8 ins. in diam., bears N. 66½° W., 72 lks. dist., scribed C 1/4 S33 BT.</p>	
<p>60.09</p>	<p>The point for the C-N 1/16 sec. cor. of sec. 33. Set an iron post, 30 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E C N 1/16 S 33 1969</p> <p>from which</p> <p style="padding-left: 40px;">A pine, 12 ins. in diam., bears N. 85¼° E., 54 lks. dist., scribed C N 1/16 S33 BT. A pine, 24 ins. in diam., bears S. 23° W., 83 lks. dist., scribed C N 1/16 S33 BT.</p>	
<p>80.22</p>	<p>The 1/4 sec. cor. of secs. 28 and 33.</p>	
<p>20.03</p>	<p>From the 1/4 sec. cor. of secs. 33 and 34, S. 89° 31' W., on the E. and W. center line of sec. 33. The point for the C-E 1/16 sec. cor. of sec. 33. Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.</p>	

The Survey of a Portion of the
Subdivision Lines in a Number of Sections
Township 21 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T21N R3E C E 1/16 S 33 1969</p> <p>from which</p> <p style="padding-left: 40px;">A pine, 10 ins. in diam., bears N. 28 3/4° E., 89 lks. dist., scribed C E 1/16 S33 BT.</p> <p style="padding-left: 40px;">A pine, 20 ins. in diam., bears S. 30 3/4° W., 63 lks. dist., scribed C E 1/16 S33 BT.</p> <p>40.06 Intersect the N. and S. center line, the center 1/4 sec. cor. of sec. 33.</p> <p>60.10 The point for the C-W 1/16 sec. cor. of sec. 33.</p> <p style="padding-left: 40px;">Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 10 ins. in the ground, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T21N R3E C W 1/16 S 33 1969</p> <p>from which</p> <p style="padding-left: 40px;">A pine, 14 ins. in diam., bears N. 65 3/4° E., 26 lks. dist., scribed C W 1/16 S33 BT.</p> <p style="padding-left: 40px;">A pine, 10 ins. in diam., bears S. 3 1/2° W., 10 lks. dist., scribed C W 1/16 S33 BT.</p> <p>80.14 The 1/4 sec. cor. of secs. 32 and 33.</p>
	<p>From the C-E 1/16 sec. cor. of sec. 33,</p> <p>N. 0° 34' W., on the N. and S. center line of the NE 1/4 of sec. 33.</p> <p>20.06 Intersect the E. and W. center line of the NE 1/4, the point for the NE 1/16 sec. cor. of sec. 33.</p> <p style="padding-left: 40px;">Set an iron post, 30 ins. long, 2 1/2 ins. in diam., over a cross (+) chiseled on bedrock, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E NE 1/16 S 33 1969</p> <p>from which</p> <p style="padding-left: 40px;">A pine, 8 ins. in diam., bears N. 39 1/2° E., 53 lks. dist., scribed NE 1/16 S33 BT.</p>

The Survey of a Portion of the
 Subdivision Lines in a Number of Sections
 Township 21 North, Range 3 East
 Gila and Salt River Meridian, Arizona

CHAINS		
40.17	<p>A pine, 10 ins. in diam., bears S. 6° W., 75 lks. dist., scribed NE 1/16 S33 BT.</p> <p>The E 1/16 sec. cor. of secs. 28 and 33.</p>	
20.04	<p>From the N 1/16 sec. cor. of secs. 33 and 34, S. 89° 40' W., on the E. and W. center line of the NE 1/4 of sec. 33.</p> <p>Intersect the N. and S. center line of the NE 1/4, the NE 1/16 sec. cor. of sec. 33.</p> <p>Intersect the N. and S. center line, the C-N 1/16 sec. cor. of sec. 33.</p>	
20.09	<p>From the C-W 1/16 sec. cor. of sec. 33. N. 0° 39' W., on the N. and S. center line of the NW 1/4 of sec. 33.</p> <p>Intersect the E. and W. center line of the NW 1/4, the point for the NW 1/16 sec. cor. of sec. 33.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E NW 1/16 S 33 1969</p> <p>from which</p> <p>A pine, 14 ins. in diam., bears N. 7¼° E., 35 lks. dist., scribed NW 1/16 S33 BT.</p> <p>A pine, 10 ins. in diam., bears S. 62° W., 38 lks. dist., scribed NW 1/16 S33 BT.</p> <p>The W 1/16 sec. cor. of secs. 28 and 33.</p>	
20.07	<p>From the C-N 1/16 sec. cor. of sec. 33, S. 89° 24' W., on the E. and W. center line of the NW 1/4 of sec. 33.</p> <p>Intersect the N. and S. center line of the NW 1/4, the NW 1/16 sec. cor. of sec. 33.</p> <p>The N 1/16 sec. cor. of secs. 32 and 33.</p>	
	<p>Thence, in section 34.</p> <p>The standard 1/4 sec. cor. of sec. 34, on the south boundary of the township, which is monumented with an iron post, 1 in. in diam., firmly set in a mound of stone, 3 ft. base, 18 ins. high, with regulation brass cap mkd.</p>	

The Survey of a Portion of the
 Subdivision Lines in a Number of Sections
 Township 21 North, Range 3 East
 Gila and Salt River Meridian, Arizona

CHAINS		
40.43	<p style="text-align: center;">T21N R3E S C <u>1/4 S 34</u></p> <p style="text-align: center;">1969 1941</p> <p>I added the township, range, and 1969 date to the above brass cap.</p> <p>substantiated by:</p> <p style="padding-left: 40px;">A pine, 14 ins. in diam., bears N. 59$\frac{1}{2}$° E., 38 lks. dist., scribed 1/4 S34 SC BT.</p> <p style="padding-left: 40px;">A pine, 12 ins. in diam., bears N. 65° W., 11 lks. dist., scribed 1/4 S34 SC BT.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 45' W., on the N. and S. center line of sec. 34.</p> <p>Intersect the E. and W. center line, the point for the center 1/4 sec. cor. of sec. 34.</p> <p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. in diam., over a cross (+) chiseled on bedrock, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E C 1/4 S 34</p> <p style="text-align: center;">1969</p> <p>from which</p> <p style="padding-left: 40px;">An oak, 12 ins. in diam., bears S. 29° W., 99 lks. dist., scribed C 1/4 S34 BT.</p> <p style="padding-left: 40px;">A pine, 18 ins. in diam., bears N. 41° W., 103 lks. dist., scribed C 1/4 S34 BT.</p>	79.87
40.30	<p>From the 1/4 sec. cor. of secs. 34 and 35, WEST, on the E. and W. center line of sec. 34.</p> <p>Intersect the N. and S. center line, the center 1/4 sec. cor. of sec. 34.</p>	80.90
80.90	<p>The 1/4 sec. cor. of secs. 27 and 34.</p> <p>Thence, in section 35.</p> <p>From the standard 1/4 sec. cor. of sec. 35, on the south boundary of the township,</p> <p>N. 0° 32' W., on the N. and S. center line of sec. 35.</p>	

The Survey of a Portion of the
Subdivision Lines in a Number of Sections
Township 21 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS		
20.14	<p>The point for the C-S 1/16 sec. cor. of sec. 35.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E C S 1/16 S 35</p> <p style="text-align: center;">1969</p> <p>from which</p> <p style="padding-left: 40px;">A pine, 5 ins. in diam., bears N. 86° E., 56 lks. dist., scribed C S 1/16 S35 BT.</p> <p style="padding-left: 40px;">A pine, 18 ins. in diam., bears S. 62¼° W., 61 lks. dist., scribed C S 1/16 S35 BT.</p>	
30.21	<p>The point for the C-N-S 1/64 sec. cor. of sec. 35.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">C N S 1/64 S 35</p> <p style="text-align: center;">1969</p> <p>No suitable accessories available.</p>	
40.28	<p>Intersect the E. and W. center line, the point for the center 1/4 sec. cor. of sec. 35.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E C ¼ S 35</p> <p style="text-align: center;">1969</p> <p>No suitable accessories available.</p>	
50.34	<p>The point for the C-S-N 1/64 sec. cor. of sec. 35.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground, and in a mound of stone, 2½ ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">C S N 1/64 S 35</p> <p style="text-align: center;">1969</p> <p>No other suitable accessory available.</p>	

The Survey of a Portion of the
Subdivision Lines in a Number of Sections
Township 21 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS	
60.40	<p>The point for the C-N 1/16 sec. cor. of sec. 35.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E C N 1/16 S 35 1969</p> <p>from which</p> <p style="padding-left: 40px;">A pine, 12 ins. in diam., bears S. 27° E., 83 lks. dist., scribed C N 1/16 S35 BT.</p> <p style="padding-left: 40px;">A pine, 10 ins. in diam., bears N. 13¼° W., 36 lks. dist., scribed C N 1/16 S35 BT.</p>
80.52	<p>The 1/4 sec. cor. of secs. 26 and 35.</p> <p>From the 1/4 sec. cor. of secs. 35 and 36, S. 89° 34' W., on the E. and W. center line of sec. 35.</p>
19.97	<p>The point for the C-E 1/16 sec. cor. of sec. 35.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E C E 1/16 S 35 1969</p> <p>from which</p> <p style="padding-left: 40px;">A pine, 8 ins. in diam., bears N. 64½° E., 132 lks. dist., scribed C E 1/16 S35 BT.</p> <p style="padding-left: 40px;">A pine, 5 ins. in diam., bears N. 39½° W., 44 lks. dist., scribed C E 1/16 S35 BT.</p>
29.955	<p>The point for the C-W-E 1/64 sec. cor. of sec. 35.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">C W E 1/64 S 35 1969</p> <p>No suitable accessories available.</p>
39.94	<p>Intersect the N. and S. center line, the center 1/4 sec. cor. of sec. 35.</p>

The Survey of a Portion of the
 Subdivision Lines in a Number of Sections
 Township 21 North, Range 3 East
 Gila and Salt River Meridian, Arizona

CHAINS		
59.98	The point for the C-W 1/16 sec. cor. of sec. 35. This corner point is located within private land; the landowner did not grant permission for the monumentation of the corner.	
80.02	The 1/4 sec. cor. of secs. 34 and 35.	
20.11	<p>From the C-E 1/16 sec. cor. of sec. 35, N. 0° 24' W., on the N. and S. center line of the NE 1/4 of sec. 35.</p> <p>Intersect the E. and W. center line of the NE 1/4, the point for the NE 1/16 sec. cor. of sec. 35.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 15 ins. in the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E NE 1/16 S 35 1969</p> <p>from which</p> <p style="padding-left: 40px;">A pine, 8 ins. in diam., bears N. 81¼° E., 65 lks. dist., scribed NE 1/16 S35 BT.</p> <p style="padding-left: 40px;">A pine, 14 ins. in diam., bears N. 41° W., 45 lks. dist., scribed NE 1/16 S35 BT.</p>	
40.20	The E 1/16 sec. cor. of secs. 26 and 35.	
19.99	<p>From the N 1/16 sec. cor. of secs. 35 and 36, S. 89° 39' W., on the E. and W. center line of the NE 1/4 of sec. 35.</p> <p>Intersect the N. and S. center line of the NE 1/4, the NE 1/16 sec. cor. of sec. 35.</p>	
39.99	Intersect the N. and S. center line, the C-N 1/16 sec. cor. of sec. 35.	
10.057	<p>From the C-W-E 1/64 sec. cor. of sec. 35, N. 0° 28' W., on the N. and S. center line of the SW 1/4, NE 1/4 of sec. 35.</p> <p>The calculated position, the point for the SW-NE 1/64 sec. cor. of sec. 35.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">SW NE 1/64 S 35 1969</p>	

The Survey of a Portion of the
Subdivision Lines in a Number of Sections
Township 21 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS	
	<p>No suitable accessories available.</p> <hr/> <p>S. 89° 36.5' W., on the E. and W. center line of the SW 1/4, NE 1/4 of sec. 35.</p> <p>9.992 Intersect the N. and S. center line, the C-S-N 1/64 sec. cor. of sec. 35.</p>
	<p>From the point for the C-W 1/16 sec. cor. of sec. 35, heretofore described.</p> <p>N. 0° 35' W., on the N. and S. center line of the NW 1/4 of sec. 35.</p> <p>20.11 Intersect the E. and W. center line of the NW 1/4, the point for the NW 1/16 sec. cor. of sec. 35.</p> <p>Set a copper-coated steel stake, 8 ins. long, 1/2 in. in diam., with brass cap 6 ins. below the surface of the road, with brass cap, 1½ ins. in diam., mkd.</p> <p style="text-align: center;">T21N R3E NW 1/16 S 35 1969</p> <p>from which</p> <p>An iron post, 30 ins. long, 2½ ins. in diam., set 22 ins. in the ground, for a reference monument, bears S. 57½° W., 17.7 ft. dist., with brass cap mkd. RM T21N R3E NW 1/16 S35 17.7 FT 1969, and an arrow pointing to the true corner point.</p> <p>An iron post, 30 ins. long, 2½ ins. in diam., set 22 ins. in the ground, for a reference monument, bears N. 49¼° W., 16.4 ft. dist., with brass cap mkd. RM T21N R3E NW 1/16 S35 16.4 FT 1969, and an arrow pointing to the true corner point.</p> <p>40.20 The W 1/16 sec. cor. of secs. 26 and 35.</p>
	<p>From the C-N 1/16 sec. cor. of sec. 35,</p> <p>S. 89° 36' W., on the E. and W. center line of the NW 1/4 of sec. 35.</p> <p>20.05 Intersect the N. and S. center line of the NW 1/4, the NW 1/16 sec. cor. of sec. 35.</p> <p>30.07 The point for the C-W-NW 1/64 sec. cor. of sec. 35.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, and in a mound of stone, 2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">C W NW 1/64 S 35 1969</p>

The Survey of a Portion of the
 Subdivision Lines in a Number of Sections
 Township 21 North, Range 3 East
 Gila and Salt River Meridian, Arizona

CHAINS		
40.09	No suitable accessories available. The N 1/16 sec. cor. of secs. 34 and 35.	
10.02	From the S-N 1/64 sec. cor. of secs. 34 and 35, N. 89° 35' E., on the E. and W. center line of the SW 1/4, NW 1/4 of sec. 35. The calculated position, the point for the SW-NW 1/64 sec. cor. of sec. 35. Set an iron post, 30 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap mkd. <div style="text-align: center;"> SW NW 1/64 S 35 1969 </div> No suitable accessories available. <hr style="width: 20%; margin: auto;"/> N. 0° 34' W., on the N. and S. center line of the SW 1/4, NW 1/4 of sec. 35.	
10.055	Intersect the E. and W. center line of the NW 1/4, the C-W-NW 1/64 sec. cor. of sec. 35. From the standard W 1/16 sec. cor. of sec. 35, on the south boundary of the township, N. 0° 31' W., on the N. and S. center line of the SW 1/4 of sec. 35. Intersect the E. and W. center line of the SW 1/4, the point for the SW 1/16 sec. cor. of sec. 35. Set an iron post, 30 ins. long, 2½ ins. in diam., 22 ins. in the ground, with brass cap mkd. <div style="text-align: center;"> T21N R3E SW 1/16 S 35 1969 </div> from which A pine, 10 ins. in diam., bears N. 46½° E., 34 lks. dist., scribed SW 1/16 S35 BT. A pine, 7 ins. in diam., bears N. 46½° W., 31 lks. dist., scribed SW 1/16 S35 BT.	
30.19	The point for the C-N-SW 1/64 sec. cor. of sec. 35. Set an iron post, 30 ins. long, 2½ ins. in diam., 22 ins. in the ground, with brass cap mkd.	

The Survey of a Portion of the
Subdivision Lines in a Number of Sections
Township 21 North, Range 3 East
Gila and Salt River Meridian, Arizona

CHAINS	
40.25	<p style="text-align: center;">C N SW 1/64 S 35 1969</p> <p>No suitable accessories available.</p> <p>Intersect the E. and W. center line, the C-W 1/16 sec. cor. of sec. 35.</p>
20.05	<p>From the C-S 1/16 sec. cor. of sec. 35, S. 89° 42' W., on the E. and W. center line of the SW 1/4 of sec. 35.</p> <p>Intersect the N. and S. center line of the SW 1/4, the SW 1/16 sec. cor. of sec. 35.</p>
40.12	<p>The S 1/16 sec. cor. of secs. 34 and 35.</p> <p>From the C-N-S 1/64 sec. cor. of sec. 35, S. 89° 39' W., on the E. and W. center line of the NE 1/4, SW 1/4 of sec. 35.</p> <p>Intersect the N. and S. center line of the SW 1/4, the C-N-SW 1/64 sec. cor. of sec. 35.</p> <p>S. 89° 40' W., beginning new measurement, on the E. and W. center line of the NW¹/₄, SW¹/₄ of sec. 35.</p> <p>The N-S 1/64 sec. cor. of secs. 34 and 35.</p>
20.18	<p>From the standard E 1/16 sec. cor. of sec. 35, on the south boundary of the township, N. 0° 41' W., on the N. and S. center line of the SE 1/4 of sec. 35.</p> <p>Intersect the E. and W. center line of the SE 1/4, the point for the SE 1/16 sec. cor. of sec. 35.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, and in a mound of stone, 2½ ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T21N R3E SE 1/16 S 35 1969</p> <p>from which</p> <p>A pine, 12 ins. in diam., bears S. 7½° W., 52 lks. dist., scribed SE 1/16 S35 BT.</p> <p>A pine, 6 ins. in diam., bears S. 84½° W., 33 lks. dist., scribed SE 1/16 S35 BT.</p> <p>Intersect the E. and W. center line, the C-E 1/16 sec. cor. of sec. 35.</p>
40.37	

The Survey of a Portion of the
 Subdivision Lines in a Number of Sections
 Township 21 North, Range 3 East
 Gila and Salt River Meridian, Arizona

<p>CHAINS</p>	<p>From the S 1/16 sec. cor. of secs. 35 and 36, S. 89° 33' W., on the E. and W. center line of the SE 1/4 of sec. 35.</p>
<p>20.02</p>	<p>Intersect the N. and S. center line of the SE 1/4, the SE 1/16 sec. cor. of sec. 35.</p>
<p>40.06</p>	<p>Intersect the N. and S. center line, the C-S 1/16 sec. cor. of sec. 35.</p>
<p>General Description</p>	
<p>The lands encompassed in this survey are situated within the Kaibab National Forest. There is a southeasterly exposure with drainage into Big Spring Canyon. The land is rolling, and the soil consists of decomposed granite. Timber consists of oak, pine, and juniper; undergrowth: young trees, brush and grass.</p>	

34

CERTIFICATE OF SURVEY

I, Marlin G. Livermore, II, HEREBY CERTIFY upon honor that,

in pursuance of special instructions bearing date of the 16th day of February, 1967,

I have dependently resurveyed a portion of the Fifth Standard Parallel North, through Range 3 East (the south boundary of the township) and a portion of the subdivision lines, and surveyed a portion of the subdivision lines in a number of sections, Township 21 North, Range 3 East

of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

May 28, 1971
(Date)

Marlin G. Livermore II
(Cadastral Surveyor)
Marlin G. Livermore, II

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date MAY 28 1971

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the dependent resurvey of a portion of the Fifth Standard Parallel North, through Range 3 East (the south boundary of the township) and a portion of the subdivision lines, and the survey of a portion of the subdivision lines in a number of sections, Township 21 North, Range 3 East, Gila and Salt River Meridian, Arizona

executed by Marlin G. Livermore, II

having been critically examined and found correct, are hereby approved.

MAY 30 1972
(Date)

Clark F. Gunn
(Chief, Division of Engineering)
Chief, Division of Cadastral Survey

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in is a true copy of the original field notes.

(Date)

(Chief, Division of Engineering)