

BOOK 4933

Form 9180-6
(April 1965)
(formerly 4-679)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

DEPENDENT RESURVEY

OF A

PORTION OF THE EAST BOUNDARY

PORTION OF THE NORTH BOUNDARY (FIRST STANDARD PARALLEL SOUTH)

PORTION OF THE SUBDIVISIONAL LINES

SURVEY OF

SUBDIVISIONS IN SECS. 3, 4, 11 AND 12

ACCRETION LAND IN SECTION 2 AND 3

TRAVERSE AND MEANDERS OF A PORTION

OF THE PRESENT BANKS OF THE GILA RIVER

IN SECTIONS 3, 4, 11 AND 12

RETRACEMENT OF

PORTION OF THE RECORD MEANDERS OF THE

GILA RIVER IN SECTIONS 3, 4, 11 AND 12

TOWNSHIP 6 SOUTH, RANGE 24 EAST

Of the GILA AND SALT RIVER Meridian,

In the State of ARIZONA

EXECUTED BY

LEONARD W. MURPHY

CADASTRAL SURVEYOR

FRANK W. ROGERS

SURVEYING TECHNICIAN

PAUL G. BAUER

CADASTRAL SURVEYOR

Under special instructions dated FEBRUARY 28, 19 64, which provided for the surveys
AND SUPPLEMENTAL SPECIAL INSTRUCTIONS DATED FEBRUARY 23, 1965,
included under Group Number 404, approved MARCH 3, 1964,
FEBRUARY 24, 1965
and assignment instructions dated DECEMBER 17, 19 64.
JANUARY 30, 19 67

Survey commenced DECEMBER 18, 19 64

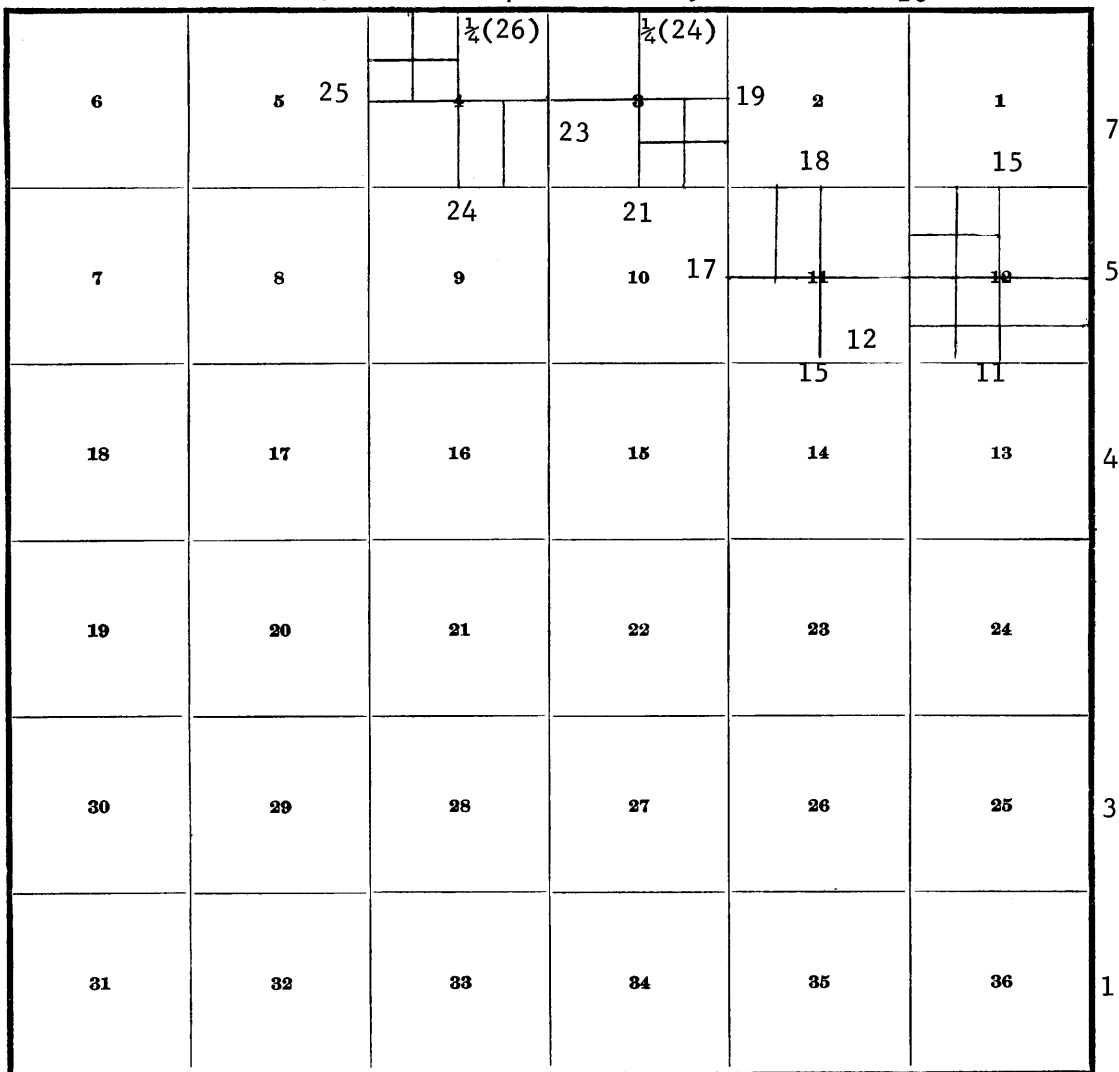
Survey completed MARCH 17, 19 72

1A

BOOK 4933

INDEX DIAGRAM

Township 6 South, Range 24 East
 7 7 8 9 10



Page

Subdivision of Section 3 -- 35
 Subdivision of Section 4 -- 40
 Subdivision of Section 11 -- 33
 Subdivision of Section 12 -- 27
 Accretion in Section 2 ----- 45
 Accretion in Section 3 ----- 46
 Traverse & Meanders of
 Gila River ----- 47

Township 6 South, Range 24 East
Gila and Salt River Meridian, Arizona

CHAINS

The boundaries and subdivisional lines of the township, and the meanders of the Gila River, were surveyed in 1875 by T. F. White. The west boundary of the township was resurveyed in 1900 by P. Contzen. The boundaries and subdivisional lines of the township, and the meanders of the Gila River, were resurveyed in 1916 by A. B. Rich.

The following field notes are those of a dependent resurvey of a portion of the east boundary, a portion of the north boundary (the First Standard Parallel South), and a portion of the subdivisional lines, designed to restore the corners in their true original location according to the best available evidence; the survey of subdivisions in Sections 3, 4, 11 and 12; survey of accretion land in Sec. 2 and 3; the traverse and meanders of a portion of the present banks of the Gila River and the retracement of a portion of the 1875 and 1916 Gila River meanders, Township 6 South, Range 24 East, G&SRM., Arizona.

This survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, the Special Instructions dated February 28, 1964, and Supplemental Instructions dated February 23, 1965 by Leonard W. Murphy and Frank W. Rogers, from December 18, 1964 to March 25, 1965.

A retracement of those areas adjacent to the Gila River was made January 30 to May 12, 1967 and July 27, 1970 and March 17, 1972 by Paul G. Bauer in order to remonument corner monuments that were destroyed during the December 1965 flood or by the subsequent releveled of farm land near the Gila River. The following field notes are, therefore, a combination of Leonard W. Murphy and Frank W. Rogers resurveys and surveys, and of Paul G. Bauer's retracements and remonumentation.

Only the true line bearings and distances for the surveyed lines are given in these notes. Unless described, each corner was monumented with a standard iron post, 30 ins. long, 2½ inches in diameter, flanged at the base, and with a brass cap riveted to the top.

The geographic position of the southeast corner of the township, as scaled from the U. S. Geological Survey topographic map, "Thatcher Quadrangle, Arizona, 1960", is as follows: Latitude, 32°51'36" North, and Longitude 109°50'05" West.

The mean magnetic declination was found to be 13°30' East.

Dependent Resurvey, Portion of the East Boundary
Township 6 South, Range 24 East, Arizona

Reestablishment of the Survey Executed
in 1916 by A. B. Rich, U. S. Surveyor

The cor. of T. 6 and T. 7 S., Rs. 24 and 25 E., monumented by a rusty iron post, 3 ins. diam., set 4 ins. below the surface on the W. edge of a graded road bearing N. and S. The brass cap mkd. as described in the official record of the 1916 resurvey.

At the cor. point

Dependent Resurvey, Portion of the E. Bdy., T. 6 S., R. 24 E.

CHAINS		
	<p>Set the iron post 12 ins. below the surface, brass cap mkd.</p> <p style="text-align: center;">T6S R24E R25E <u>S36 S31</u> S 1 S 6 T7S 1967</p> <p>from which</p> <p>An iron post 30 ins. long, 2½ ins. diam., set 24 ins. in the ground for a reference monument, bears N. 45° E., 74 lks. dist., brass cap mkd. RM T6S R25E S31 48.84 FT. 1967, and an arrow pointing to the true cor.</p> <p>An iron post 30 ins. long, 2½ ins. diam., set 24 ins. in the ground for a reference monument, bears S. 45° E., 74 lks. dist., brass cap mkd. RM T7S R25E S6 48.84 FT. 1967, and an arrow pointing to the true cor.</p> <p>The reference monuments are set in a N. and S. fence line.</p> <p>Bury the rusted iron post, inverted and alongside the new iron post.</p> <p>N. 0°14' E., bet. secs. 31 and 36.</p> <p>Over nearly level land, along the west edge of a graded road, bearing N. 0°16' W.</p>	
20.00	Center of same road.	
39.95	<p>Point for the ¼ sec. cor. of secs. 31 and 36, at proportionate dist., falls on the E. edge of same graded road. There is no remaining evidence of this cor.</p> <p>Set the iron post 10 ins. below the surface, brass cap mkd.</p> <p style="text-align: center;">T6S R24E R25E ½ <u>S36 S31</u> 1964</p> <p>from which</p> <p>An iron post, 30 ins. long, 2½ ins. diam., set 20 ins. in the ground for a reference monument, bears S. 36°47' E., 49 lks. dist., brass cap mkd. RM T6S R25E S31 32.34 FT. 1964, and an arrow pointing to the true cor.</p> <p>An iron post 30 ins. long, 2½ ins. diam., set 20 ins. in the ground for a reference monument, bears N. 45°25' W., 73.2 lks. dist., brass cap mkd. RM T6S R24E S36 48.3 FT. 1964, and an arrow pointing to the true cor.</p> <p>Continue over same road, bears N.</p>	
79.90	Point for the cor. of secs. 25, 30, 31 and 36, at proportionate dist., falls near the center of a junction	

Dependent Resurvey, Portion of the E. Bdy., T. 6 S., R. 24 E.

CHAINS

of graded roads bearing E., S. and W. There is no remaining evidence of this cor.

Set the iron post 18 ins. below the surface, brass cap mkd.

T6S
R24E R25E
S25 | S30
S36 | S31
1967
1964

from which

A spike in a telephone pole for a reference point, bears N. 47°51' E., 57.3 lks., head of spike mkd. RM.

A spike in a telephone pole for a reference point, bears S. 44°52' W., 65 lks., head of spike marked RM.

Land, nearly level.

Soil, sandy to gravelly clay loam.

Timber, none.

Undergrowth, moderate creosote brush.

N. 0°14' E., bet. secs. 25 and 30.

Over nearly level land.

- 0.35 N. edge of road bearing E. and W.; thence over newly leveled land.
- 13.80 Highline Canal, 30 lks. wide, 6 ft. deep, flows N. 57° W. from S. 60° E.; thence over cultivated land.
- 28.30 Same canal, flows N. 49° E. from S. 50° W.; thence along W. edge of cultivated field.
- 39.95 The $\frac{1}{4}$ sec. cor. of secs. 25 and 30, monumented by a rusted iron post, 36 ins. long, 1 in. diam., set flush with the surface of the ground and in a fence line bearing E. and W., brass cap mkd., as described in the official record of the 1916 resurvey. No evidence of the witness $\frac{1}{4}$ sec. cors. set in 1916.

At the cor. point

Set the iron post 22 ins. in the ground, brass cap mkd.

T6S
R24E R25E
 $\frac{1}{4}$
S25 | S30
1967

from which

A spike in a telephone pole for a reference point, bears S. 87°34' W., 30.6 lks. dist.; head of spike mkd. RM.

The NE. cor. of Pima Cemetery, defined by a fence line bearing South and West, bears West, 30 lks. dist.

Dep. Resurvey, Portion of E. Bdy., T. 6 S., R. 24 E.

CHAINS	<p>Bury the rusted iron post, inverted and alongside the new iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°01' W., beginning new measurement.</p> <p>0.50 Cor. of graded roads bearing West and N. 0°20' E., thence along E. side of graded road bearing N. 0°20' E.</p> <p>19.80 Center of same road.</p> <p>39.54 The cor. of secs. 19, 24, 25 and 30, monumented by an iron post, 3 ins. diam., firmly set, brass cap mkd., as described in the official record of the 1916 resurvey.</p> <p>This sec. cor. is located at a cor. of fences bearing West and North, and at the NW. cor. of roads, bearing North, S. 0°20' W. and West.</p> <p>Land, nearly level. Soil, sandy loam. Timber, none. Undergrowth, creosote brush.</p> <hr/> <p>The section line bet. secs. 19 and 24 was not retraced as it was not needed for control.</p> <hr/> <p>The point for the cor. of secs. 13, 18, 19 and 24, which is marked by an iron rod, 16 ins. long, ½ in. diam., set 6 ins. below the surface of intersection of graded roads bearing North, South and West. This iron rod was shown me by Dean Rogers, nearby resident, and by Robert Feather, local surveyor, and is accepted as the best available evidence of the position of the orig. cor. No evidence of the witness sec. cors. set in 1916.</p> <p>At the cor. point</p> <p>Set the iron post 8 ins. below the surface of the road, brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T6S R24E R25E S13 S18 S24 S19 1964</p> </div> <p>from which</p> <p>An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears S. 45° W., 50 lks. dist., brass cap mkd. RM S24 T6S R24E 33.0 FT. 1964, and an arrow pointing to the true cor.</p> <p>An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 45° W., 50 lks. dist., brass cap mkd. RM S13 T6S R24E 33.0 FT. 1964, and an arrow pointing to the true cor.</p> <p>Bury the iron rod alongside the iron post.</p>
--------	--

Dep. Resurvey, Portion of E. Bdy., T. 6 S., R. 24 E.

CHAINS	
	N. 0°06' E., bet. secs. 13 and 18.
	Over level land, down a graded road bearing N. and S.
39.75	Point for the 1/4 sec. cor. of secs. 13 and 18, at proportionate dist.; there is no remaining evidence of this cor. The point is not remonumented.
46.50	Graded road ends.
47.15	Dodge-Nevada Canal, 20 lks. wide, 4 ft. deep, flows N. 75° W., thence over cultivated land.
64.00	Fence, bears S. 80° E. and N. 80° W.
65.93	Point for the 1916 record meander cor. of secs. 7 and 12, on the left bank of the Gila River, identical with the witness cor. of secs. 7, 12, 13 and 18, at proportionate dist.; there is no remaining evidence of this cor. The point is not remonumented.
78.00	Leave cultivated land, bears irreg. SE. and NW.; enter dense undergrowth.
79.50	Point for the cor. of secs. 7, 12, 13 and 18, at proportionate dist.; this point was not monumented during the 1916 resurvey.
	Set the iron post flush with the surface of the ground, brass cap mkd.
	T6S R24E R25E <u>S12 S7</u> <u>S13 S18</u> 1965
	Set a mesquite post, 3 ft. long, 3 ins. diam., 16 ins. in the ground, alongside the iron post.
	Land, nearly level. Soil, sandy loam. Timber, mesquite near the Gila River. Undergrowth, salt cedar.
	N. 0°06' E., bet. secs. 7 and 12.
	Over level land, through dense undergrowth.
1.50	Present left bank of the Gila River, a cut bank, 4 ft. high, bears S. 75° E. and N. 75° W.
4.15	Center of channel, 220 lks. wide, 1 ft. deep, flows N. 75° W.
5.25	Present right bank of the Gila River, a cut bank, 6 ft. high, bears S. 75° E. and N. 75° W.
11.85	Curtis Canal, 4 lks. wide, 10 ft. deep, flows N. 45°30' W., thence over cultivated land.
19.875	Point for the S 1/16 sec. cor. of secs. 7 and 12, at proportionate dist. This point is not monumented.
32.50	Point for the 1916 record meander cor. of secs. 7 and 12, on the right bank of the Gila River, at proportionate dist.; there is no remaining evidence of this cor.

Dep. Resurvey, Portion of E. Bdy., T. 6 S., R. 24 E.

CHAINS	
	The point is not remonumented.
39.60	Irrigation ditch, 15 lks. wide, 3 ft. deep, flows W. for 25 lks., thence flows S. 0°15' W.
39.69	Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 7 and 12.
	Set the iron post 24 ins. in the ground, brass cap mkd.
	<p style="text-align: center;">T6S R24E R25E W C $\frac{1}{4}$ S12 S7 1965</p>
	The iron post is set in a fence line bearing E. and W.
39.75	True point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 12, at proportionate dist., falls in cultivated field.
	<p style="text-align: center;">-----</p> <p>N. 0°14' E., on a true line bet. secs. 7 and 12 ($N\frac{1}{2}$), beginning new measurement.</p>
	Over nearly level cultivated land.
19.50	Irrigation ditch, 10 lks. wide, 2 ft. deep, flows E. for 40 lks., thence flows SE.
19.70	Fence and power line, bears E. and W.
19.85	Intersection of graded roads bearing N., E. and W.; thence down road bearing N.
20.40	Telephone line, bears W. for 30 lks., thence bears N.
39.88	Point for the cor. of secs. 1, 6, 7 and 12, at proportionate dist.; there is no remaining evidence of this cor.; no evidence of the witness sec. cors. set in 1916.
	Set the iron post 10 ins. below the surface of the graded road, brass cap mkd.
	<p style="text-align: center;">T6S R24E R25E <u>S1 S6</u> S12 S7 1965</p>
	from which
	<p>An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 83° E., 30.3 lks. dist., brass cap mkd. RM S6 T6S R25E 20.0 FT. 1965, and an arrow pointing to the true cor.</p>
	<p>An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground for a reference monument, bears N. 35° W., 45½ lks. dist., brass cap mkd. RM S1 T6S R24E 30.0 FT. 1965, and an arrow pointing to the true cor.</p>
	The cor. is located in a graded road bearing N., S. and N. 89°49' W.
	Land, nearly level.
	Soil, sandy loam.
	Timber, scattered mesquite along fence rows.
	Undergrowth, none.

Dependent Resurvey, First Stan. Par. S., T. 5 S., R. 24 E.

CHAINS	
	N. 0°14' E., bet. secs. 1 and 6. Over nearly level land, down a graded road.
36.50	Surfaced road, bears S. 70° E. and N. 70° W.
37.90	Graham Canal, 15 lks. wide, 4 ft. deep, flows NW., thence asc. gentle S. slope.
39.88	The ¼ sec. cor. of secs. 1 and 6, monumented by an iron post, 1 in. diam., set, mkd. and witnessed as described in the official record of the 1916 resurvey. Land, nearly level. Soil, sandy loam. Timber, scattered scrub mesquite.
The remainder of the section line bet. secs. 1 and 6 was not retraced as it was not needed for control.	
Dependent Resurvey of a Portion of the First Standard Parallel South, T. 5 S., R. 24 E.	
Reestablishment of the Resurvey Executed by A. B. Rich in 1916	
	From the standard ¼ sec. cor. of sec. 31, T. 5 S., R. 24 E., monumented by an iron post, 1 in. diam., set, mkd. and witnessed as described in the official record of the 1916 resurvey.
	S. 89°49' E., on the S. bdy. of sec. 31. Over nearly level land, through moderate undergrowth.
7.70	Graded road, bears E. and S. 80° W.
12.29	Point for the closing cor. of secs. 5 and 6, T. 6 S., R. 24 E., at proportionate dist.; there is no remaining evidence of this cor. Not remonumented.
21.70	Roadway over a buried pipeline, bears SE. and NW.
39.50	Dodge-Nevada Canal, 30 lks. wide, 5 ft. deep, flows NW. from S. 70° E.
39.91	Point for the standard cor. of secs. 31 and 32, at proportionate dist.; there is no remaining evidence of the orig. cor. This point was not remonumented. Land, nearly level. Soil, sandy loam. Timber, none. Undergrowth, scattered scrub mesquite.
	S. 89°49' E., along the S. bdy. of sec. 32.
11.00	Center of Southern Pacific railroad tracks, bears S. 30° E. and N. 30° W.
12.28	Point for the ¼ sec. cor. of sec. 5, T. 6 S., R. 24 E., at proportionate dist.; there is no remaining evidence of this cor. Not remonumented.
13.80	U. S. Highway No. 70, bears S. 30° E. and N. 30° W.
15.00	Fence, parallels Highway; enter moderate undergrowth.

Dependent Resurvey, First Stan. Par. S., T. 5 S., R. 24 E.

CHAINS	
19.70	Fence, bears N. and S.; enter cultivated land.
31.50	Wash, 20 lks. wide, 1 ft. deep, drains N.
32.70	Fence, bears N. and S.
32.90	Farm road, bears N. and S.
34.30	Fence, bears N. and S.
38.50	Fence, bears N. and S.
39.91	Point for the standard $\frac{1}{4}$ sec. cor. of sec. 32, at proportionate dist.; there is no remaining evidence of this cor. Not remonumented.
47.10	Ft. Thomas Canal, 20 lks. wide, 5 ft. deep, flows N. 80° W.
47.66	Point for the 1916 record meander cor. of sec. 32 on the left bank of the Gila River at proportionate dist.; there is no remaining evidence of this cor. Not monumented.
47.90	Fence, parallels canal.
48.40	Access road, parallels canal.
49.40	Irrigation ditch, 8 lks. wide, 3 ft. deep, flows N. 80° W.
52.18	Point for the closing cor. of secs. 4 and 5, T. 6 S., R. 24 E., at proportionate dist.; there is no remaining evidence of this cor., hereinafter described.
71.08	Point for the 1875 record meander cor. of the right bank of the Gila River, on the S. bdy. of sec. 32 at proportionate dist.; there is no remaining evidence of this cor. Not remonumented.
78.60	Leave cultivated land, bears S. 10° E. and N. 10° W.; enter dense undergrowth.
79.82	Point for the standard cor. of secs. 32 and 33, at proportionate dist.; this point fell in the Gila River and was not monumented at time of the 1916 resurvey.
	Set the iron post 20 ins. in the ground, brass cap mkd.
	T5S R24E
	SC
	<u>S32 S33</u>
	1965
	Set a mesquite post, 5 ft. long, 5 ins. diam., 24 ins. in the ground, alongside the iron post.
	Land, nearly level.
	Soil, sandy loam.
	Timber, mesquite; cottonwood and willow near the Gila River.
	Undergrowth, salt cedar near the Gila River.
	S. 89°49' E., along the S. bdy. of sec. 33.
	Over nearly level land.
0.62	Present left bank of the Gila River, a cut bank, 8 ft. high, bears N. 2° E. and S. 2° W.
4.35	Gila River, course N. 2° E.

Dependent Resurvey, First Stan. Par. S., T. 5 S., R. 24 E.

CHAINS	
7.18	Point for the 1916 record meander cor. of sec. 33 on the right bank of the Gila River, identical with the witness standard cor. for secs. 32 and 33 at proportionate dist.; there is no remaining evidence of this cor. The point is not remonumented.
8.10	Present right bank of the Gila River, a cut bank, 8 ft. high, bears S. 1°52' E. and N. 20° W. Not monumented.
8.40	Fence, bears S. 20° E. and N. 20° W.
9.40	Dyke, 3 ft. high, bears S. 16° E. and N. 16° W.; leave undergrowth; thence over cultivated land.
38.30	Irrigation ditch, concrete lined, 15 lks. wide, 2½ ft. deep, bears S. 15° E. and N. 15° W.
38.45	Farm road, parallels irrigation ditch.
38.90	Curtis Canal, 40 lks. wide, 10 ft. deep, flows N. 20° W.
39.56	Fence, parallels Curtis Canal.
39.91	The standard ¼ sec. cor. of sec. 33, monumented by an iron pipe, 1 in. diam., set, mkd. and witnessed as described in the official record of the 1916 resurvey.
	<hr/> <p>S. 89°41' E., along the S. bdy. of sec. 33 (E ½), beginning new measurement.</p>
	Over gently rolling land.
5.80	Graded road, bears N. and S.
8.20	Surfaced road, bears S. 35° E. and N. 35° W.
12.29	The closing cor. of secs. 3 and 4, monumented by an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record of the 1916 resurvey of T. 6 S., R. 24 E.
19.80	Markham Wash, 60 lks. wide, 2 ft. deep, drains S. 30° W.
40.03	The standard cor. of secs. 33 and 34, monumented by an iron post, 3 ins. diam., set, mkd. and witnessed as described in the official record of the 1916 resurvey.
	<p>Land, level to gently rolling. Soil, deep sandy loam on bottom land, shallow, gravelly clay loam on rolling land. Timber, scattered mesquite, cottonwood and willow near the Gila River. Undergrowth, salt cedar in river area, moderate greasewood and cacti on rolling land.</p>
	S. 89°57' E., along the S. bdy. of sec. 34.
	Over gently rolling land.
39.91	The standard ¼ sec. cor. of sec. 34, monumented by an iron post, 1 in. diam., set, mkd. and witnessed as described in the official record of the 1916 resurvey.

Dependent Resurvey, First Stan. Par. S., T. 5 S., R. 24 E.

CHAINS	
	<p>S. 89°54' E., along the S. bdy. of sec. 34 (E ½), beginning new measurement.</p> <p>Over gently rolling land.</p>
11.10	Edge of mesa, bears NE. and SW.; desc. SE. slope.
12.19	Proportionate point for the closing cor. of secs. 2 and 3, T. 6 S., R. 24 E., hereinafter described.
15.60	Draw, drains SW. from E., asc. along draw.
26.10	Leave same draw, drains W. from SE.; asc. W. slope.
34.10	W. edge of mesa, bears N. and S., thence over level mesa.
39.69	<p>The standard cor. of secs. 34 and 35, monumented by an iron post, 3 ins. diam., set, mkd. and witnessed as described in the official record of the 1916 resurvey.</p> <p>Land, gently rolling. Soil, gravelly, clay loam. Timber, none. Undergrowth, moderate greasewood and scattered cacti.</p>
<hr/> <p>The W ½ mile, along the S. bdy. of sec. 35, was not needed for control and was not retraced.</p> <hr/>	
<p>From the standard ¼ sec. cor. of sec. 35, monumented by an iron post, 1 in. diam., set, mkd. and witnessed as described in the official record of the 1916 resurvey.</p> <p>S. 89°48' E., along the S. bdy. of sec. 35 (E ½).</p> <p>Over rolling land.</p>	
12.07	Proportionate point for the closing cor. of secs. 1 and 2, T. 6 S., R. 24 E., hereinafter described.
12.85	Billingsley Wash, 50 lks. wide, 2 ft. deep, drains S. 70° W., curving to SW. from N. 20° E., curving to N. 15° E.
15.00	Asc. NW. slope.
20.00	W. edge of mesa, bears NE. and SW.; thence over rolling mesa.
39.75	<p>The standard cor. of secs. 35 and 36, monumented by an iron post, 3 ins. diam., set, mkd. and witnessed as described in the official record of the 1916 resurvey.</p> <p>Land, gently rolling. Soil, gravelly clay loam. Timber, none. Undergrowth, moderate greasewood, scattered cacti.</p>
<hr/> <p>The mile of line along the S. bdy. of sec. 36 was not retraced as it was not needed for control.</p> <hr/>	
<p>Dependent Resurvey, Portion of the Subdivisional Lines T. 6 S., R. 24 E., G&SRM, Arizona</p>	

Dependent Resurvey, Subdivisional Lines, T. 6 S., R. 24 E.

CHAINS	
	<p>Reestablishment of the Survey Executed in 1875 by T. F. White, and of the Resurvey Executed in 1916 by A. B. Rich</p> <hr/>
	<p>From the cor. of secs. 7, 12, 13 and 18 on the E. bdy. of the Tp.</p> <p>N. 89°45' W., bet. secs. 12 and 13.</p> <p>Over nearly level land, through dense undergrowth.</p>
1.15	Leave undergrowth, bears SE. and NW.
1.54	Fence, bears SE. and NW.
8.00	Proportionate point for the 1916 record meander cor. of secs. 12 and 13 on the left bank of the Gila River; there is no remaining evidence of this cor. Not monu- mented.
10.00	Enter low land, bears SE. and N. 60° W.
19.90	Point for the E 1/16 sec. cor. of secs. 12 and 13, at proportionate dist. This point is not monumented.
24.70	Fence, bears S. 85° E. and N. 85° W.; leave low lands, enter cultivated land.
33.09	Proportionate point for the 1916 record meander cor. of secs. 12 and 13 on the left bank of the Gila River; there is no remaining evidence of this cor. Not monu- mented.
39.54	Irrigation ditch, 10 lks. wide, 3 ft. deep, flows N.
39.80	Point for the 1/4 sec. cor. of secs. 12 and 13, at propor- tionate dist.
	Set the iron post 20 ins. in the ground, brass cap mkd.
	<p>T6S R24E 1/4 <u>S12</u> S13 1965</p>
	Set a mesquite post, 3 ft. long, 3 ins. diam., 20 ins. in the ground, alongside the iron post.
	Continue over cultivated land.
45.19	Proportionate point for the 1916 record meander cor. of secs. 12 and 13 on the left bank of the Gila River; there is no remaining evidence of this cor. Not monu- mented.
45.59	Proportionate point for the 1916 witness 1/4 sec. cor. of secs. 12 and 13; there is no remaining evidence of this cor. Not monumented.
59.70	Point for the W 1/16 sec. cor. of secs. 12 and 13 at proportionate dist. This point is not monumented.
66.40	Irrigation ditch, 10 lks. wide, 3 ft. deep, flows NW.

Dep. Resurvey, Subdivisional Lines, T. 6 S., R. 24 E.

CHAINS					
79.39	Fence, bears N. and S.				
79.60	<p>The cor. of secs. 11, 12, 13 and 14, monumented by an iron post, 2 ins. diam., concrete filled, found 6 ins. under the surface of a graded road bearing N. and S. The brass cap missing. The concrete filled iron post is accepted as the best remaining evidence of the cor.</p> <p>At the corner point</p> <p>Set the iron post 10 ins. below the surface, brass cap mkd.</p> <div style="text-align: center;"> <p>T6S R24E</p> <table border="1" style="margin: auto;"> <tr> <td>S11</td> <td>S12</td> </tr> <tr> <td>S14</td> <td>S13</td> </tr> </table> <p>1965</p> </div> <p>from which</p> <p>An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 41°30' E., 30.8 lks. dist., brass cap mkd. RM S12 T6S R24E 20.3 FT. 1965, and an arrow pointing to the true cor.</p> <p>An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 36°26' W., 26.1 lks. dist., brass cap mkd. RM S11 T6S R24E 17.2 FT. 1965, and an arrow pointing to the true cor.</p> <p>Bury the concrete filled iron post alongside the iron post.</p> <p>Land, nearly level. Soil, sandy loam. Timber, none. Undergrowth, salt cedar adjacent to cultivated land.</p>	S11	S12	S14	S13
S11	S12				
S14	S13				
	N. 0°06' E., bet. secs. 11 and 12.				
	Over level land, down a bladed road, bearing N.				
19.88	Point for the S 1/16 sec. cor. of secs. 11 and 12, at proportionate dist. This point is not monumented.				
21.30	Same road, curves to W. from S.; thence along top of a dyke, 2 ft. high, bears N.				
21.80	Enter dense undergrowth; continue along dyke.				
22.54	Point for the 1916 record meander cor. of secs. 11 and 12, on the left bank of the Gila River, at proportionate dist.; there is no remaining evidence of this cor. The point is not remonumented.				
39.35	<p>Point selected for a witness point bet. secs. 11 and 12, falls on an old cut bank, 3 ft. high, bears E. and W., and end of dyke..</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T6S R24E</p> <p>W P</p> <table border="1" style="margin: auto;"> <tr> <td>S11</td> <td>S12</td> </tr> </table> <p>1967</p> </div>	S11	S12		
S11	S12				

Dep. Resurvey, Subdivisional Lines, T. 6 S., R. 24 E.


CHAINS

Set a mesquite post, 3 ft. long, 4 ins. diam., alongside the iron post.

Leave dense undergrowth, thence through moderate undergrowth.

39.76 Point for the $\frac{1}{2}$ sec. cor. of secs. 11 and 12, at proportionate dist.; there is no remaining evidence of this cor.


Set the iron post 22 ins. in the ground, brass cap mkd.



Set a mesquite post, 4 ft. long, 3 ins. diam., alongside the iron post.

51.39 Point for the meander cor. of secs. 11 and 12 on the present left bank of the Gila River, a cut bank, 3 ft. high, bears S. 58°00' E. and S. 75°34' W.

Set the iron post 24 ins. in the ground, brass cap mkd.




Set a mesquite post, 3 ft. long, 3 ins. diam., 16 ins. in the ground, alongside the iron post.

51.43 Point for the 1875 record meander cor. of secs. 11 and 12, on the left bank of the Gila River, at proportionate dist.; there is no remaining evidence of this cor. The point is not remonumented.

53.27 Point for the meander cor. of sec. 12, on the present right bank of the Gila River, a cut bank, 3 ft. high, bears N. 84°38' E. and S. 81°18' W.

Set the iron post 22 ins. in the ground, brass cap mkd.



Set a mesquite post, 3 ft. long, 3 ins. diam., 14 ins. in the ground, alongside the iron post.

Thence through dense salt cedar.

54.89 Point for the 1875 record meander cor. of secs. 11 and 12, on the right bank of the Gila River, at proportionate dist.; there is no remaining evidence of this cor. Not remonumented.

59.645 Point for the N $\frac{1}{16}$ sec. cor. of secs. 11 and 12, at proportionate dist.

Dep. Resurvey, Subdivisional Lines, T. 6 S., R. 24 E.

CHAINS	
	<p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T6S R24E N 1/16 S11 S12 1965</p> <p>Set a mesquite post, 4 ft. long, 4 ins. diam., 18 ins. in the ground, alongside the iron post.</p>
61.30	<p>Dyke, 6 ft. high, bears S. 85°11' E. and N. 85°11' W.; leave dense undergrowth, thence through scattered undergrowth.</p>
61.69	<p>Point for the 1916 record meander cor. of secs. 11 and 12, on the right bank of the Gila River, at proportionate dist.; there is no remaining evidence of this cor. The point is not remonumented.</p>
64.60	<p>Leave undergrowth; enter cultivated land, bears irreg. E. and W.</p>
79.00	<p>Leave cultivated land, bears E. and W.</p>
79.32	<p>Cor. of fences bearing N., E. and W., bears W., 3 lks. dist.</p> <p>Thence along E. side of fence bearing N.</p>
79.53	<p>Point for the cor. of secs. 1, 2, 11 and 12 at proportionate dist.; there is no remaining evidence of this cor.</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T6S R24E S 2 S 1 S11 S12 1965</p> <p>from which</p> <p>The proportionate point for the closing cor. of secs. 1 and 2, on the N. bdy. of the Tp., bears N. 0°05' E., 79.42 chs. dist. There is no remaining evidence of the orig. cor. This control line was fully retraced, and careful search was made for evidence of intervening cors., none of which were recovered.</p> <p>Set the iron post 20 ins. in the ground, collar of stone to top, brass cap mkd.</p> <p style="text-align: center;">S 35 S 2 S 1 C C T6S R24E 1965</p> <p>From this cor., the standard cor. of secs. 35 and 36, previously described, bears S. 89°48' E., 27.68 chs. dist.</p>

Dep. Resurvey, Subdivisional Lines, T. 6 S., R. 24 E.

CHAINS	
	<p>Land, nearly level. Soil, sandy loam. Timber, scattered mesquite and cottonwood. Undergrowth, patches of dense salt cedar in river areas.</p>
	<p>From the cor. of secs. 1, 6, 7, and 12, on the E. bdy. of the Tp. N. 89°49' W., bet. secs. 1 and 12. Over nearly level land, along N. edge of a graded road, bears S. 89°49' E. and N. 89°49' W.</p>
26.80	Intersect a graded road bearing N. and S.; continue along N. edge of a graded road bearing N. 89°49' W.
39.86	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 12, at proportionate dist.; there is no remaining evidence of this cor. Set the iron post 24 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T6S R24E $\frac{1}{4}$ $\frac{S 1}{S12}$ 1965</p>
	<p>Cor. falls at N. edge of road bearing E. and W. Continue along N. edge of same road.</p>
59.36	Same road, curves to S.
59.795	<p>Point for the W $\frac{1}{16}$ sec. cor. of secs. 1 and 12, at proportionate dist. Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T6S R24E W $\frac{1}{16}$ $\frac{S 1}{S12}$ 1965</p>
71.66	Deposit glass in the hole alongside the iron post. Curtis Canal, 30 lks. wide, 10 ft. deep, flows NW.
79.73	The cor. of secs. 1, 2, 11 and 12.
	<p>Land, nearly level. Soil, sandy loam. Timber, none. Undergrowth, none.</p>
	<p>From the cor. of secs. 11, 12, 13 and 14. N. 89°44' W., bet. secs. 11 and 14. Over nearly level land.</p>
2.32	Fence, bears N. and S.
6.89	Fence, bears N. and S.

Dependent Resurvey, Subdivisional Lines, T. 6 S., R. 24 E.

CHAINS	
13.29	Fence and a power line, bears N. and S.
19.90	Graded road, bears N. and S.
20.09	Irrigation ditch, concrete lined, 10 lks. wide, 3 ft. deep, flows N.
39.19	Fence line, abandoned, bears N. and S.
39.49	Dodge-Nevada Canal, 15 lks. wide, 5 ft. deep, flows N. 45° W.
39.85	Point for the ¼ sec. cor. of secs. 11 and 14, at proportionate dist.; there is no remaining evidence of this cor.
	Set the iron post flush with the ground, brass cap mkd.
	<p style="text-align: center;">T6S R24E $\frac{1}{4}$ $\frac{S\ 11}{S\ 14}$ 1965</p>
	Deposit broken glass alongside the iron post.
49.09	Fence, bears N. and S.
56.65	Fence, bears N. and S.
58.35	Power line, bears S. 58° E. and N. 58° W.
59.89	U. S. Highway No. 70, bears S. 58° E. and N. 58° W.
61.74	Center of Southern Pacific Railroad tracks, parallels highway.
62.74	Power line, parallels railroad tracks.
66.04	Fence, bears N. and S.
67.24	Fence, bears N. and S.
69.54	Fence, bears N. and S.; leave cultivated land, enter dense undergrowth.
79.74	Point for the cor. of secs. 10, 11, 14 and 15, at proportionate dist.; there is no remaining evidence of this cor.
	Set the iron post 28 ins. in the ground, brass cap mkd.
	<p style="text-align: center;">T6S R24E $\frac{S10}{S15} \frac{S11}{S14}$ 1965</p>
	from which
	A mesquite, 8 ins. diam., bears S. 22°40' E., 54 lks. dist., mkd. S 14 BT.
	The NE. cor. of a house, bears S. 9° W., 2.30 chs. dist.

Dep. Resurvey, Subdivisional Lines, T. 6 S., R. 24 E.

CHAINS	
	<p>The $\frac{1}{4}$ sec. cor. of secs. 22 and 23, monumented by an iron post, 1 in. diam., set, mkd. and witnessed as described in the official record of the 1916 resurvey, bears S. $0^{\circ}04'$ W., 120.50 chs. dist. This control line was fully retraced, and careful search was made for evidence of intervening cors., none of which were recovered.</p> <p>The $\frac{1}{4}$ sec. cor. of secs. 10 and 15, monumented by an iron post, 1 in. diam., set, mkd. and witnessed as described in the official record of the 1916 resurvey, bears S. $89^{\circ}45'$ W., 39.72 chs. dist.</p> <p>Land, nearly level. Soil, sandy loam. Timber, none. Undergrowth, none except dense scrub mesquite in the westernmost 10.00 chs.</p>
	<p>N. $0^{\circ}07'E.$, bet. secs. 10 and 11.</p> <p>Over nearly level land, through moderate undergrowth.</p>
10.32	Fence and a power line, bears S. 58° E. and N. 58° W.
10.82	Center of Southern Pacific Railroad tracks, bears S. 58° E. and N. 58° W.
12.07	U. S. Highway No. 70, parallels railroad tracks.
13.02	Fence and power line, parallels highway.
23.92	Dodge-Nevada Canal, 25 lks. wide, 6 ft. deep, flows N. 70° W.
24.93	Drainage canal, 10 lks. wide, 2 ft. deep, flows N. 20° W.
39.70	Point for the $\frac{1}{4}$ sec. cor. of secs. 10 and 11, at proportionate dist. This point fell in an irrigation ditch at time of the 1916 resurvey, and was not monumented.
	Set the iron post 22 ins. in the ground, brass cap mkd.
	<p style="text-align: center;">T6S R24E $\frac{1}{4}$ S10 S11 1965</p>
	The cor. is set 2 lks. west of a fence bearing N. and S.
40.15	Point for the witness $\frac{1}{4}$ sec. cor. of secs. 10 and 11, at proportionate dist.; there is no remaining evidence of this cor. The point is not remonumented.
59.55	Point for the N $1/16$ sec. cor. of secs. 10 and 11, at proportionate dist. This point is not monumented.
76.03	Point for the 1916 record meander cor. of secs. 10 and 11 on the left bank of the Gila River, identical with the witness cor. of secs. 2, 3, 10 and 11, at proportionate dist.; there is no remaining evidence of this cor. The point is not remonumented.


Dep. Resurvey, Subdivisional Lines, T. 6 S., R. 24 E.

CHAINS		
79.40	<p>Point for the cor. of secs. 2, 3, 10 and 11, at proportionate dist.. (At time of the 1916 resurvey, this point fell in the Gila River and was not monumented.)</p> <p>Set a re-bar, 3 ft. long, ½ in. diam., 2 ft. under the surface of a cultivated field.</p> <p>from which</p> <p style="padding-left: 40px;">An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground for a reference monument, bears S. 57°20' W., 51.5 lks. dist., brass cap mkd. RM S10 T6S R24E 34 FT. 1965, and an arrow pointing to the true cor.</p> <p style="padding-left: 40px;">An iron post, 30 ins. long, 2½ ins. diam., set 22 ins. in the ground for a reference monument, bears N. 40°27' W., 63.6 lks. dist., brass cap mkd. RM S 3 T6S R24E 42 FT. 1965, and an arrow pointing to the true cor.</p> <p>Land, nearly level. Soil, sandy loam. Timber, scattered cottonwood. Undergrowth, salt cedar.</p>	
	<p>From the cor. of secs. 1, 2, 11 and 12.</p> <p>N. 89°51' W., bet. secs. 2 and 11.</p> <p>Over nearly level land.</p>	
19.91	<p>Point for the E 1/16 sec. cor. of secs. 2 and 11, at proportionate dist.. This point is not monumented.</p>	
32.50	<p>Enter dense undergrowth, bears SE. and NW.</p>	
39.82	<p>Point for the ¼ sec. cor. of secs. 2 and 11, at proportionate dist.; there is no remaining evidence of this cor.</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T6S R24E ¼ $\frac{S 2}{S11}$ 1965</p> <p>No suitable bearing objects or trees available.</p>	
39.93	<p>Fence, on dyke, 4 ft. high, bears N. and S.</p>	
40.23	<p>Enter cultivated land, bears N. and S.</p>	
44.90	<p>Leave cultivated land, bears SE. and NW.</p>	
45.28	<p>Fence, bears SE. and NW.; enter dense undergrowth.</p>	
45.37	<p>Point for the 1916 record meander cor. of secs. 2 and 11, on the right bank of the Gila River, at proportionate dist.; there is no remaining evidence of this cor. The point is not remonumented.</p>	

Dep. Resurvey, Subdivisional Lines, T. 6 S., R. 24 E.

CHAINS	
48.83	<p>Leave dense undergrowth, bears irreg. N. and S.; thence over low land, through moderate undergrowth.</p>
59.735	<p>Point for the W 1/16 sec. cor. of secs. 2 and 11, at proportionate dist.</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T6S R24E</p> <p>W. $\frac{1}{16}$ S 2</p> <p>S 11</p> <p>1967</p> </div> <p>Set a willow post, 3 ft. long, 3 ins. diam., 22 ins. in the ground, alongside the iron post.</p>
61.78	<p>Present right bank of the Gila River, a cut bank, 3½ ft. high, bears N. 9° E. and S. 10°45' W.; this point is not monumented.</p>
63.79	<p>Present left bank of the Gila River, a cut bank, 6 ft. high, bears S. 2°09' E. and N. 10° E.; this point is not monumented; thence through dense undergrowth.</p>
67.30	<p>Dyke, 6 ft. high, bears S. 20°05' E. and N. 20°05' W.; leave dense undergrowth, enter cultivated land.</p>
74.44	<p>Point for the 1875 record meander cor. of secs. 2 and 11 on the right bank of the Gila River, at proportionate dist.; there is no remaining evidence of this cor. The point is not remonumented.</p>
77.83	<p>Point for the 1875 record meander cor. of secs. 2 and 11 on the left bank of the Gila River, at proportionate dist.; there is no remaining evidence of this cor.</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T6S R24E</p> <p>M C</p> <p>S 2</p> <p>S 11</p> <p>1970</p> </div>
79.65	<p>The cor. of secs. 2, 3; 10 and 11.</p> <p>Land, nearly level. Soil, sandy loam. Timber, scattered cottonwood along the Gila River. Undergrowth, salt cedar near the Gila River.</p>
	<p>N. 0°36' E., bet. secs. 2 and 3.</p> <p>Over cultivated land.</p>
3.34	<p>Point for the 1875 record meander cor. of secs. 2 and 3 on the left bank of the Gila River, at proportionate dist.; there is no remaining evidence of this cor.</p> <p>Set the iron post 18 ins. under the surface of a cultivated field, brass cap mkd.</p> <div style="text-align: center;"> <p>T6S R24E</p> <p>M C</p> <p>S 3 S 2</p> <p>1970</p> </div>

Dep. Resurvey, Subdivisional Lines, T. 6 S., R. 24 E.

CHAINS	
	<p>from which</p> <p>An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground for a reference monument, bears N. 0°36' E., 87.9 lks. dist., brass cap mkd. T6S R24E S 2 S 3 RM 58 FT. 1970 and an arrow pointing to the true cor.</p> <p>An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground for a reference monument, bears N. 86°35' W., 37.1 lks. dist., brass cap mkd. T6S R24E S 3 RM 24.5 FT. 1970 and an arrow pointing to the true cor.</p>
4.30	Enter dense undergrowth.
5.49	Point for the 1875 record meander cor. of secs. 2 and 3, on the right bank of the Gila River, at proportionate dist.; there is no remaining evidence of this cor. The point is not remonumented.
13.70	Present left bank of the Gila River, a cut bank, 4 ft. high, bears S. 77°32' E. and N. 77°32' W.; not monumented.
18.15	<p>Point for the meander cor. of secs. 2 and 3, on the present right bank of the Gila River, a dyke 10 ft. high, bears S. 63°33' E. and N. 63°33' W.</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T6S R24E S 3 S 2</p>  <p>MC 1967</p> </div>
19.85	<p>Point for the S 1/16 sec. cor. of secs. 2 and 3, at proportionate dist.</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T6S R24E S 1/16 S 3 S 2</p> <p>1967</p> </div> <p>Set a willow post, 4 ft. long, 3 ins. diam., 22 ins. in the ground, alongside the iron post.</p>
23.10	Point for the 1916 record meander cor. of secs. 2 and 3, on the right bank of the Gila River, at proportionate dist.; there is no remaining evidence of this cor. The point is not remonumented.
25.70	Enter cultivated land, bears irreg. E. and W.
39.70	<p>Point for the ¼ sec. cor. of secs. 2 and 3, at proportionate dist.; there is no remaining evidence of this cor.</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T6S R24E ¼ S 3 S 2</p> <p>1965</p> </div> <p>The cor. is set in fence line bearing E. and W.</p>

Dep. Resurvey, Subdivisional Lines, T. 6 S., R. 24 E.

CHAINS	
48.00	Curtis Canal, 30 lks. wide, 8 ft. deep, flows N. 22° W., from S. 36° E.
67.00	Surfaced road, bears N. 75° E. and S. 75° W., end of cultivated land; thence asc. gentle S. slope.
79.26	Point for the closing cor. of secs. 2 and 3, at proportionate dist.; there is no remaining evidence of this cor.
	Set the iron post 6 ins. in the ground, mound with stone to top, brass cap mkd.
	$\begin{array}{r} \text{S } 34 \\ \hline \text{S } 3 \mid \text{S } 2 \\ \text{T6S R24E} \\ \text{C} \mid \text{C} \\ 1965 \end{array}$
	from which
	The standard cor. of secs. 34 and 35, previously described, bears S. 89°54' E., 27.50 chs. dist.
	Land, nearly level to gently rolling. Soil, sandy to gravelly loam. Timber, none. Undergrowth, moderate creosote brush in the northernmost 10.00 chs.
	From the cor. of secs. 2, 3, 10 and 11.
	N. 89°36' W., bet. secs. 3 and 10.
0.25	Fence, bears N. and S.
	Over cultivated land.
0.45	Drainage ditch, 10 lks. wide, 3 ft. deep, drains N.
4.50	Point for the 1916 record meander cor. of secs. 3 and 10, on the left bank of the Gila River, at proportionate dist.; there is no remaining evidence of this cor. The point is not remonumented.
8.30	Irrigation ditch, 8 lks. wide, 2 ft. deep, flows N. 0°33' E. from S. 0°33' W.
19.91	Point for the E 1/16 sec. cor. of secs. 3 and 10, at proportionate dist.
	Set the iron post 18 ins. below the surface, brass cap mkd.
	$\begin{array}{r} \text{T6S R24E} \\ \text{E } \frac{1}{16} \mid \frac{\text{S } 3}{\text{S10}} \\ 1965 \end{array}$
	No bearing objects or trees available.
39.81	Cor. of fences bearing irreg. S. and W.

Dep. Resurvey, Subdivisional Lines, T. 6 S., R. 24 E.

CHAINS	
39.82	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 3 and 10, at proportionate dist.; there is no remaining evidence of this cor.</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> $\begin{array}{c} \text{T6S R24E} \\ \frac{1}{4} \frac{\text{S } 3}{\text{S10}} \\ 1965 \end{array}$ <hr/> <p>S. 89°38' W., beginning new measurement.</p> <p>Over cultivated land, along a fence bearing irreg. W.</p>
19.61	<p>Graded road, bears N. and S.</p>
19.955	<p>Point for the W $\frac{1}{16}$ sec. cor. of secs. 3 and 10, at proportionate dist.</p> <p>Set the iron post 12 ins. below the surface, brass cap mkd.</p> $\begin{array}{c} \text{T6S R24E} \\ \text{W } \frac{1}{16} \frac{\text{S } 3}{\text{S10}} \\ 1965 \end{array}$ <p>No bearing objects or trees available.</p> <p>Continue over cultivated land.</p>
39.91	<p>Point for the cor. of secs. 3, 4, 9 and 10, at proportionate dist.; there is no remaining evidence of this cor.</p> <p>Set the iron post 15 ins. below the surface, brass cap mkd.</p> $\begin{array}{c} \text{T6S R24E} \\ \text{S } 4 \mid \text{S } 3 \\ \text{S } 9 \mid \text{S10} \\ 1965 \end{array}$ <p>No local bearing objects or trees available.</p> <p>from which</p> <p>The cor. of secs. 9, 10, 15 and 16, monumented by an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record of the 1916 resurvey, bears S. 0°07' E., 79.40 chs. dist.</p> <p>This control line was fully retraced, and careful search was made for evidence of the intervening cor.; not recovered.</p> <p>Land, nearly level. Soil, sandy loam. Timber, none. Undergrowth, none.</p>

Dep. Resurvey, Subdivisional Lines, T. 6 S., R. 24 E.

CHAINS	
	N. 0°31' E., bet. secs. 3 and 4.
	Over cultivated land.
5.00	Enter dense undergrowth, bears S. 75° E. and N. 75° W.
15.99	Point for the 1916 record meander cor. of secs. 3 and 4, on the left bank of the Gila River, at proportionate dist.; there is no remaining evidence of this cor. The point is not remonumented.
18.20	Left bank of a nearly dry slough, 3 ft. high, bears irreg. NE. and NW.
19.85	Point for the S 1/16 sec. cor. of secs. 3 and 4, at proportionate dist. This cor. is not monumented.
20.40	North bank of same slough, 3 ft. high, bears irreg. E. and W., thence through dense undergrowth.
29.70	Present left bank of the Gila River, 5 ft. high, bears N. 15° E. and S. 15° W., thence over low sand and gravel bar. This point is not monumented.
33.65	Point for the 1875 record meander cor. of secs. 3 and 4, on the right bank of the Gila River, at proportionate dist.; there is no remaining evidence of this cor. The point is not remonumented.
37.20	Present channel of the Gila River, 4 chs. wide, 1 ft. deep, flows S. 17° W.
39.70	Point for the 1/4 sec. cor. of secs. 3 and 4, at proportionate dist., falls in the Gila River; this point was not monumented at time of the 1916 resurvey, nor at this time.
43.67	Point for the meander cor. of secs. 3 and 4, on the present right bank of the Gila River, 3 ft. high, bears N. 46°44' E. and S. 14°40' W. This point is not monumented.
46.56	Point for the 1916 record meander cor. of secs. 3 and 4, on the right bank of the Gila River, at proportionate dist.; there is no remaining evidence of this cor. The point is not remonumented.
46.75	Point for the witness 1/4 sec. cor. of secs. 3 and 4, at proportionate dist.; there is no remaining evidence of this cor. The point is not remonumented.
49.00	Power line, bears SE. and NW.
52.35	Markham Wash, 40 lks. wide, 3 ft. deep, drains S. 40° W.
52.60	Fence, bears N. 20° E. and S. 20° W., thence through moderate undergrowth.
53.00	Curtis Canal, 30 lks. wide, 7 ft. deep, flows S. 80° W. for 1.50 chs., thence curves to N.
54.60	Power line, bears SE. and NW.
58.65	Fence, bears E. and W.

Dep. Resurvey, Subdivisional Lines, T. 6 S., R. 24 E.

CHAINS		
70.07	Surfaced road, bears S. 50° E. and N: 36° W.	
79.44	The closing cor. of secs. 3 and 4 on the N. bdy. of the Tp., monumented by an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record of the 1916 resurvey.	
	from which	
	The standard ¼ sec. cor. on the S. bdy. of sec. 33, T. 5 S., R. 24 E., bears N. 89°41' W., 12.29 chs. dist., previously described.	
	Land, nearly level to gently rolling. Soil, on S. side of Gila River, sandy loam; on N. side of the river, gravelly, clay loam. Timber, scattered cottonwood along S. side of river. Undergrowth, salt cedar along S. side of river; on N. side, moderate greasewood.	
	The point for the ¼ sec. cor. of sec. 3 is on the N. bdy. of the Tp. and at midpoint bet. the closing cors.	
	At the cor. point	
	Set the iron post 22 ins. in the ground, brass cap mkd.	
	$\frac{1}{4} S 3$ $T6S R24E$ 1965	
	Build a mound with stones S. of the iron post.	
	From this cor., the standard cor. of secs. 33 and 34, T. 5 S., R. 24 E., bears N. 89°57' W., 12.18 chs. dist., previously described.	
	From the cor. of secs. 3, 4, 9 and 10. N. 89°31' W., bet. secs. 4 and 9.	
	Over cultivated land.	
10.50	Matthews Wash, 35 lks. wide, 2 ft. deep, drains N. 50° W.	
19.91	Point for the E 1/16 sec. cor. of secs. 4 and 9, at proportionate dist.	
	Set the iron post 15 ins. below the surface of cultivated land, brass cap mkd.	
	$T6S R24E$ $E \frac{1}{16} \frac{S 4}{S 9}$ 1965	
	No local bearing objects or trees available.	
29.00	U. S. Highway No. 70, bears S. 58° E. and N. 58° W.	
30.50	Center of Southern Pacific railroad tracks, parallels highway.	

Dep. Resurvey, Subdivisional Lines, T. 6 S., R. 24 E.

CHAINS	
39.82	<p>Point for the $\frac{1}{2}$ sec. cor. of secs. 4 and 9, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T6S R24E $\frac{1}{2}$ $\frac{S\ 4}{S\ 9}$ 1965</p> <p>Cor. falls in NW. cor. of small feeding pen.</p>
79.30	<p>Dodge-Nevada Canal, 30 lks. wide, 5 ft. deep, flows N. 1° W.</p>
79.64	<p>The cor. of secs. 4, 5, 8 and 9, monumented by an iron pipe, 6 ft. long, 3 ins. diam., iron cap mkd.</p> <p style="text-align: center;">T6S R24E $\frac{S\ 5}{S\ 8}$ $\frac{S\ 4}{S\ 9}$ 1960</p> <p>This cor. point is being used by adjacent land owners and was monumented by local surveyors. This pipe is accepted as the best remaining evidence of the orig. cor. position. No evidence of the witness sec. cors. set in 1916.</p> <p>Land, nearly level. Soil, sandy loam. Timber, none. Undergrowth, none.</p>
	<p>N. 0°02' E., bet. secs. 4 and 5.</p>
	<p>Over nearly level land.</p>
10.48	<p>Dodge-Nevada Canal, 20 lks. wide, 8 ft. deep, flows N. 47° W. from curve to S. 1° E.</p>
27.44	<p>Fence, bears S. 58°15' E. and N. 58°15' W.</p>
28.78	<p>Center of Southern Pacific railroad tracks, bears S. 58°15' E. and N. 58°15' W.</p>
31.04	<p>U. S. Highway No. 70, parallels railroad tracks.</p>
33.51	<p>Fence parallels highway.</p>
39.92	<p>Point for the $\frac{1}{2}$ sec. cor. of secs. 4 and 5, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T6S R24E $\frac{1}{2}$ $\frac{S\ 5}{S\ 8}$ $\frac{S\ 4}{S\ 9}$ 1965</p> <hr style="width: 20%; margin: auto;"/>

Dep. Resurvey, Subdivisional Lines, T. 6 S., R. 24 E.

CHAINS	
	N. 0°45' E., beginning new measurement.
	Over nearly level land.
4.40	Enter cultivated land.
19.685	Point for the N 1/16 sec. cor. of secs. 4 and 5, at proportionate dist.
	Set the iron post 24 ins. in the ground, brass cap mkd.
	T6S R24E N 1/16 S 5 S 4 1965
19.86	Fence, bears E. and W.
19.93	Irrigation ditch, 8 lks. wide, 2 ft. deep, flows W.
37.06	Fence, bears S. 80° E. and N. 80° W.
37.36	Ft. Thomas Canal, 25 lks. wide, 6 ft. deep, flows N. 80° W.
37.36	Point for the 1916 record meander cor. of secs. 4 and 5, on the left bank of the Gila River, identical with the witness closing cor. of secs. 4 and 5, at proportionate dist.; there is no remaining evidence of this cor. The point is not remonumented.
39.10	Point for the closing cor. of secs. 4 and 5, at proportionate dist. on the N. bdy. of the Tp. This point fell in the Gila River at time of the 1916 resurvey and was not monumented.
	Set the iron post 14 ins. below the surface of the cultivated field, brass cap mkd.
	$\frac{S32}{S\ 5\ S\ 4}$ C C T6S R24E 1965
	from which
	The standard cor. of secs. 32 and 33, T. 5 S., R. 24 E., bears S. 89°49' E., 27.64 chs. dist., previously described.
	Land, nearly level. Soil, sandy loam. Timber, none. Undergrowth, none.
	The point for the 1/4 sec. cor. of sec. 4 is on the N. bdy. of the Tp. and at midpoint bet. the closing cors.
	At the cor. point
	Set the iron post, 15 ins. under the surface of a cultivated field, brass cap mkd.
	$\frac{1}{4} S\ 4$ T6S R24E 1965

Dep. Resurvey, Subdivisional Lines, T. 6 S., R. 24 E.

CHAINS

From this cor. the standard cor. of secs. 32 and 33, T. 5 S., R. 24 E., bears N. 89°49' W., 12.28 chs. dist., previously described.

The point for the W 1/16 sec. cor. of sec. 4 is on the N. bdy. of the Tp. and at midpoint bet. 1/4 sec. cor. of 4 and the closing cor. of secs. 4 and 5, not monumented.

from which

The standard cor. of secs. 32 and 33, T. 5S., R. 24 E., bears S. 89°49' E., 7.68 chs. dist., previously described.

Subdivision of Sec. 12, T. 6 S., R. 24 E., Arizona

From the 1/4 sec. cor. of secs. 12 and 13.

N. 0°08'30" E., on the N. and S. center line of sec. 12.


Over cultivated land.

1.20 W. end of a fence projecting E., bears E., 10 lks. dist.

5.70 Leave cultivated land, bears irreg. E. and W.; enter dense undergrowth.

19.88 Point for the C-S 1/16 sec. cor. of sec. 12.


Set the iron post 22 ins. in the ground, brass cap mkd.



Set a railroad tie, 7 ft. long, 8 ins. diam., 30 ins. in the ground, alongside the iron post.

25.24 Point for the special meander cor. on the present left bank of the Gila River, a cut bank, 5 ft. high, bears S. 71°00' E. and N. 87°08' W.

Set the iron post 22 ins. in the ground, brass cap mkd.



Set a willow post 4 ft. long, 4 ins. diam., 20 ins. in the ground, alongside the iron post.

28.09 The present right bank of the Gila River, a cut bank, 3 ft. high, bears S. 78°00' E., and N. 84°03' W., thence through moderate undergrowth.

Subdivision of Sec. 12, T. 6 S., R. 24 E.

CHAINS		
32.30	Intersect the 1916 meander line on the right bank of the Gila River, bears S. 33°45' E. and N. 33°45' W., and point for the special meander cor. on the N. and S. center line of sec. 12. This point is not monumented.	
33.20	Enter cultivated land, bears irreg. E. and W.	
39.06	Dyke, 8 ft. high, bears E. and W.; thence over newly leveled land.	
39.76	Point for the C½ sec. cor. of sec. 12.	
	Set the iron post, 18 ins. below the surface, brass cap mkd.	
	<p>T6S R24E C½+S12 1965</p>	
	from which	
	<p>An iron post, 30 ins. long, 2½ ins. diam., set 22 ins. in the ground, for a reference monument, bears S. 0°08'30" W., 75 lks. dist., brass cap mkd. RM S12 T6S R24E 49.5 FT 1967, and an arrow pointing to the cor.</p>	
48.45	Irrigation ditch, 10 lks. wide, 2 ft. deep, flows W.; leave cultivated land.	
49.50	Power line, bears S. 36° E. and N. 29° W.	
49.83	Dyke, 8 ft. high, bears S. 28° E. and N. 28° W.	
50.21	Access road along Curtis Canal, parallels dyke and canal.	
50.70	Curtis Canal, 40 lks. wide, 10 ft. deep, flows N. 28° W.; enter cultivated land, parallels Curtis Canal.	
59.675	Point for the C-N 1/16 sec. cor. of sec. 12.	
	Set the iron post 20 ins. in the ground, brass cap mkd.	
	<p>T6S R24E C N 1/16 S12 C 1965</p>	
	Set a mesquite post, 5 ft. long, 4 ins. diam., 20 ins. in the ground, alongside the iron post.	
59.76	Fence and power line, bears S. 89°48' E. and N. 89°48' W.	
79.30	Irrigation ditch, 10 lks. wide, 2 ft. deep, flows W.	
79.50	Graded road, bears E. and W.	
79.59	The ½ sec. cor. of secs. 1 and 12.	

Subdivision of Sec. 12, T. 6 S., R. 24 E.

CHAINS	
	<p>Land, nearly level. Soil, sandy loam. Timber, scattered scrub mesquite along river and fence rows. Undergrowth, salt cedar along river.</p>
	<p>From the true point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 12 on the E. bdy. of the Tp. N. $89^{\circ}45'$ W., on the E. and W. center line of sec. 12. Over cultivated land.</p>
9.84	Irrigation ditch, 10 lks. wide, 2 ft. deep, flows S. for 13 lks., thence flows W.
9.99	Fence cor. bears South, 6 lks. dist., fences bear N., E., S. and W.
19.90	Point for the C-E $\frac{1}{16}$ sec. cor. of sec. 12. This point is not monumented.
31.54	Curtis Canal, 40 lks. wide, 10 ft. deep, flows N. $30^{\circ}45'$ W. from S. 56° E.
32.04	Access road, parallels Curtis Canal.
32.54	Power line, parallels access road.
39.80	The C $\frac{1}{4}$ sec. cor. of sec. 12.
44.82	Intersect the 1916 record meander line on the right bank of the Gila River, bears S. $33^{\circ}45'$ E. and N. $33^{\circ}45'$ W. This point is not monumented.
55.94	Dyke, 8 ft. high, bears NW. and SE. for 1.00 chs.; thence bears E.
59.72	Point for the C-W $\frac{1}{16}$ sec. cor. of sec. 12. Set the iron post 24 ins. in the ground, brass cap mkd.
	<p>T6S R24E C $\frac{W \cdot 1/16}{S 12}$ C 1965</p>
63.10	Point for the special meander cor. on the present right bank of the Gila River, a cut bank, 3 ft. high, bears S. $32^{\circ}28'$ E. and N. $29^{\circ}29'$ W. Set the iron post 22 ins. in the ground, brass cap mkd.
	<p>T6S R24E SMC C $\frac{S 12}{1967}$ C</p>
	Set a mesquite post, 5 ft. long, 4 ins. diam., 22 ins. in the ground, alongside the iron post.

Subdivision, Section 12, T. 6 S., R. 24 E.

CHAINS	
66.75	<p>Point for the special meander cor. on the present left bank of the Gila River, a cut bank, 3 ft. high, bears S. 33°17' E. and N. 40°00' W.</p>
	<p>Set the iron post 22 ins. in the ground, brass cap mkd.</p>
	<p>Set a mesquite post, 5 ft. long, 4 ins. diam., 22 ins. in the ground, alongside the iron post.</p>
	<p>Thence enter dense undergrowth, bears irreg. SE. and NW.</p>
73.60	<p>Leave dense undergrowth, bears irreg. SE. and NW.; thence over moderate undergrowth.</p>
79.64	<p>The ½ sec. cor. of secs. 11 and 12.</p>
	<p>Land, nearly level. Soil, sandy loam. Timber, mesquite in river area. Undergrowth, salt cedar in river area.</p>
	<p>From the point for the S 1/16 sec. cor. of secs. 7 and 12, on the E. bdy. of the Tp.</p>
	<p>N. 89°45' W., on the E-W centerline of the SE¼ of sec. 12.</p>
	<p>Over cultivated land.</p>
7.10	<p>Fence, bears S. 45°07' E., and N. 45°07' W.</p>
8.15	<p>Curtis Canal, 40 lks. wide, 10 ft. deep, flows N. 45°07' W.</p>
8.50	<p>Access road, parallels canal, thence through moderate undergrowth.</p>
19.90	<p>Point for the SE 1/16 sec. cor. of sec. 12. This point is not monumented.</p>
21.80	<p>Present right bank of the Gila River, a cut bank, 4 ft. high, bears S. 40° E. and N. 50° W. This point is not monumented.</p>
26.04	<p>Point for the special meander cor. on the present left bank of the Gila River, a cut bank, 8 ft. high, bears S. 54°30' E. and N. 54°30' W.</p>
	<p>Set the iron post 22 ins. in the ground, brass cap mkd.</p>

Subdivision, Section 12, T. 6 S., R. 24 E.

CHAINS	
	<p>Set a cottonwood post, 5 ft. long, 3 ins. diam., 22 ins. in the ground, alongside the iron post.</p> <p>Thence through dense willows and salt cedar.</p>
33.30	Fence, bears S. 66°30' E. and N. 68°45' W.; enter cultivated land, parallels fence.
39.40	Field dyke, 5 ft. high, bears irreg. N. and S.
39.80	The C-S 1/16 sec. cor. of sec. 12.
	<p>From the point for the W 1/16 sec. cor. of secs. 12 and 13.</p> <p>N. 0°07' E., on the N-S centerline of the SW 1/4 of sec. 12.</p> <p>Over cultivated land.</p>
15.05	Farm road, bears S. 79° E. and N. 79° W.
15.30	Fence, parallels road, leave cultivated area; enter dense undergrowth, bears S. 79° E. and N. 79° W.
19.88	Point for the SW 1/16 sec. cor. of sec. 12.
	<p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T6S R24E SW 1/16 S12 1967</p>
20.14	A cor. of fences bearing N., S. and W., bears W., 21 lks. dist.
25.92	Irrigation ditch, 8 lks. wide, 2 ft. deep, flows W.
31.52	Point for the special meander cor. on the present left bank of the Gila River, a cut bank, 6 ft. high, bears S. 54°32' E. and N. 44°31' W.
	<p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">SMC W S 12 W T6S R24E 1967</p>
	<p>Set a willow post, 3 1/2 ft. long, 3 ins. diam., 20 ins. in the ground, alongside the iron post.</p>
34.47	Present right bank of the Gila River, a cut bank, 4 ft. high, bears S. 50°17' E. and N. 32°28' W. This point is not monumented.
	<p>Thence through moderate undergrowth.</p>

Subdivision of Section 12, T. 6 S., R. 24 E.

CHAINS	
39.76	The C-W 1/16 sec. cor. of sec. 12.
<p>From the C-S 1/16 sec. cor. of sec. 12.</p> <p>N. 89°45' W., on the E-W centerline of the SW¼ of sec. 12.</p> <p>Over nearly level land, through dense undergrowth.</p>	
19.91	The SW 1/16 sec. cor. of sec. 12.
24.00	End of dense undergrowth, bears SE. and NW.; thence over cultivated land.
39.60	Fence, bears N. and S.
39.75	Bladed road, bears N. and S.
39.82	The point for the S 1/16 sec. cor. of secs. 11 and 12.
<p>From the C-W 1/16 sec. cor. of sec. 12.</p> <p>N. 0°07' E., on the N-S centerline of the NW¼ of sec. 12.</p>	
6.97	Field dyke, 5 ft. high, bears N. and SE., thence along top of dyke.
13.54	Intersect the 1916 record meander line on the right bank of the Gila River, bears S. 66°15' E. and N. 66°15' W. This is not monumented.
Continue along top of dyke.	
19.90	Point for the NW 1/16 sec. cor. of sec. 12.
Set the iron post 12 ins. under the surface of the dyke, brass cap mkd.	
<p>T6S R24E NW 1/16 S 12 1965</p>	
Set a fir post, 6 ft. long, 5 ins. diam., on top of the iron post.	
from which	
<p>The W. end of a fence projecting E., bears N. 18°26' E., 9 lks. dist.</p>	
20.10	N. end of same dyke, thence over cultivated land.
32.97	Irrigation ditch, 10 lks. wide, 2 ft. deep, flows NW.
33.22	Curtis Canal access road, bears SE. and NW.
33.37	Power line, parallels access road.
33.77	Curtis Canal, 40 lks. wide, 10 ft. deep, flows NW.
39.67	Irrigation ditch, 10 lks. wide, 2 ft. deep, flows E. for 24 lks., thence flows N.

Subdivision of Section 12, T. 6 S., R. 24 E.

CHAINS	
39.80	<p>The W 1/16 sec. cor. of secs. 1 and 12.</p> <hr/> <p>From the C-N 1/16 sec. cor. of sec. 12.</p> <p>N. 89°47' W., on the E-W centerline of the NW 1/4 of sec. 12.</p> <p>Over cultivated land.</p>
4.70	Curtis Canal, 40 lks. wide, 10 ft. deep, flows N. 28°24' W.
5.35	Canal access road, parallels canal.
5.50	Power line, parallels access road.
19.925	The NW 1/16 sec. cor. of sec. 12.
30.00	End of cultivation, bears irreg. N. and S., thence through dense undergrowth.
31.86	Intersect the 1916 record meander line on the right bank of the Gila River, bears S. 75°25' E. and N. 75°25' W. This point is not monumented.
39.85	The N 1/16 sec. cor. of secs. 11 and 12.
Subdivision of Section 11, T. 6 S., R. 24 E.	
	<p>From the 1/4 sec. cor. of secs. 11 and 14.</p> <p>N. 0°06' E., on the N. and S. center line of sec. 11.</p> <p>Over cultivated land.</p>
0.80	Dodge-Nevada Canal, 20 lks. wide, 5 ft. deep, flows N. 40° W.
39.73	Point for the C 1/4 sec. cor. of sec. 11; this point is not monumented.
49.23	Enter dense undergrowth, bears irreg. E. and W.
59.595	<p>Point for the C-N 1/16 sec. cor. of sec. 11.</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T6S R24E</p> <p style="margin: 0;">C</p> <p style="margin: 0;">N 1/16 S 11</p> <p style="margin: 0;">C</p> <p style="margin: 0;">1967</p> </div> <p>Set a willow post, 5 ft. long, 4 ins. diam., 22 ins. in the ground, alongside the iron post.</p>
68.06	The present left bank of the Gila River, 5 ft. high, bears N. 69°49' E. and S. 83°36' W. This point is not monumented.

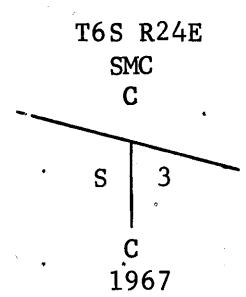

Subdivision, Section 11, T. 6 S., R. 24 E.

CHAINS	
70.96	<p>Point for the special meander cor. on the present right bank of the Gila River, a cut bank, 5 ft. high, bears N. 75°03' E. and S. 72°30' W.</p>
	<p>Set the iron post 24 ins. in the ground, brass cap mkd.</p>
	<p style="text-align: center;">T6S R24E C S 11 ----- C SMC 1967</p>
	<p>Set a mesquite post, 4 ft. long, 4 ins. diam., 20 ins. in the ground, alongside the iron post.</p>
	<p>Thence through dense undergrowth.</p>
72.89	<p>Intersect the 1916 record meander line of the right bank of the Gila River, bearing S. 47°15' E. and N. 47°15' W. This point is not monumented.</p>
79.46	<p>The ¼ sec. cor. of secs. 2 and 11.</p>
	<p>Land, nearly level. Soil, sandy loam. Timber, mesquite adjacent to the river. Undergrowth, salt cedar adjacent to river.</p>
	<p>From the ¼ sec. cor. of secs. 11 and 12.</p>
	<p>N. 89°47'30" W., on the E. and W. center line of sec. 11.</p>
	<p>Over nearly level land, through dense undergrowth.</p>
19.80	<p>Graded road, bears N. and S.; leave dense undergrowth, enter cultivated land.</p>
19.92	<p>Point for the C-E 1/16 sec. cor. of sec. 11. This point is not monumented.</p>
39.84	<p>Point for the C ¼ sec. cor. of sec. 11.</p>
39.86	<p>Fence, bears N. and S.</p>
59.77	<p>Point for the C-W 1/16 sec. cor. of sec. 11; this point is not monumented.</p>
73.38	<p>Irrigation ditch, 10 lks. wide, 4 ft. deep, flows S.</p>
79.58	<p>Graded road, bears N. and S.</p>
79.70	<p>The ¼ sec. cor. of secs. 10 and 11.</p>
	<p>Land, nearly level. Soil, sandy loam. Timber, none. Undergrowth, salt cedar in first 20.00 chs.</p>

Subdivision, Section 11, T. 6 S., R. 24 E.

CHAINS	Subdivision of NW $\frac{1}{4}$ of Section 11, T. 6 S., R. 24 E.
<p>15.76</p> <p>19.86</p> <p>30.82</p> <p>33.77</p> <p>39.72</p>	<p>From the point for the C-W 1/16 sec. cor. of sec. 11. N. 0°06' E., on the N-S centerline of the NW$\frac{1}{4}$ of sec. 11. Over cultivated land.</p> <p>Leave cultivated land, bears S. 70° E. and N. 70° W.; enter dense undergrowth.</p> <p>Point for the NW 1/16 sec. cor. of sec. 11; this point is not monumented.</p> <p>The present left bank of the Gila River, bears S. 49°45' E. and N. 49°45' W.</p> <p>Point for the special meander cor. on the present right bank of the Gila River, a cut bank, 5 ft. high, bears S. 49°45' E. and N. 49°45' W.</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <div data-bbox="698 1075 844 1344" style="text-align: center;"> <p>T6S R24E</p> <p>W</p> <p>S 11</p> <p>W</p> <p>SMC</p> <p>1967</p> </div> <p>Set a willow post, 4 ft. long, 4 ins. diam., 22 ins. in the ground; alongside the iron post.</p> <p>The W 1/16 sec. cor. of secs. 2 and 11.</p> <p>Land, nearly level. Soil, sandy loam. Timber, mesquite and willow. Undergrowth, salt cedar adjacent to the Gila River.</p>
	<p style="text-align: center;">Subdivision of Section 3, T. 6 S., R. 24 E.</p> <p>From the $\frac{1}{4}$ sec. cor. of secs. 3 and 10. N. 0°33' E., on the N. and S. center line of sec. 3. Over cultivated land, along the W. bank of an irrigation ditch, 8 lks. wide, 2 ft. deep, flows N. 0°33' E. from S. 0°33' W.</p> <p>19.725 Point for the C-S 1/16 sec. cor. of sec. 3, falls on the W. bank of the irrigation ditch.</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <div data-bbox="649 2150 844 2419" style="text-align: center;"> <p>T6S R24E</p> <p>C</p> <p>S $\frac{1}{16}$ S 3</p> <p>C</p> <p>1965</p> </div>

Subdivision, Section 3, T. 6 S., R. 24 E.

CHAINS		
25.325	<p>Point for the special meander cor. on the present left bank of the Gila River, a dyke, 8 ft. high, bears S. 52° 33' E. and N. 52° 33' W.</p>	
	<p>Set the iron post 22 ins. in the ground, brass cap mkd.</p>	
	 <p style="text-align: center;">T6S R24E SMC C S 3 C 1967</p>	
	<p>Set a willow post, 4 ft. long, 20 ins. in the ground, alongside the iron post.</p>	
	<p>Thence over low gravel bar.</p>	
27.30	<p>Present channel of the Gila River, 20 lks. wide, 1 ft. deep, flows N. 58° W.</p>	
29.20	<p>Intersect the 1916 record meander line of the left bank of the Gila River, bears S. 44° 00' E. and N. 44° 00' W. This point is not monumented.</p>	
30.78	<p>Dyke, 8 ft. high, projects S. 55° E. for 4.00 chs. and N. 65° 30' W. for 4.50 chs.; thence continue over low gravel bar.</p>	
38.72	<p>The present right bank of the Gila River, a cut bank, 6 ft. high, bears S. 35° 40' E. and N. 63° 47' W.; this point is not monumented.</p>	
39.45	<p>Point for the center $\frac{1}{4}$ cor. of sec. 3.</p>	
	<p>Set the iron post 20 ins. in the ground, brass cap mkd.</p>	
	 <p style="text-align: center;">T6S R24E C $\frac{1}{4}$ + S 3 1965</p>	
39.53	<p>Cor. of fences bearing irreg. E. and W., and SW. for 70 lks.</p>	
	<p>Thence over cultivated land.</p>	
44.64.	<p>Intersect the 1875 adjusted record meander line of the right bank of the Gila River, bears N. 78° 27' E. and S. 78° 27' W. This point is not monumented.</p>	
49.91	<p>Intersect the 1916 record meander line of the right bank of the Gila River, bears S. 58° 00' E. and N. 58° 00' W. This point is not monumented.</p>	
59.20	<p>Curtis Canal, 30 lks. wide, 7 ft. deep, flows W. from N. 82° 30' E., end of cultivation.</p>	
60.42	<p>Surfaced road, bears W. from N. 82° 30' E.</p>	
	<p>Thence over nearly level land, through moderate undergrowth.</p>	
63.00	<p>Asc. gentle SE. slope.</p>	
79.02	<p>The $\frac{1}{4}$ sec. cor. of sec. 3 only, on the N. bdy. of the Tp.</p>	

Subdivision, Section 3, T. 6 S., R. 24 E.

CHAINS	
	<p>Land, nearly level. Soil, sandy loam in S. portion, gravelly clay loam in N. 7.00 chs. Timber, scattered mesquite. Undergrowth, salt cedar in river area.</p>
	<p>From the $\frac{1}{4}$ sec. cor. of secs. 2 and 3. West, on the E. and W. center line of sec. 3. Over cultivated land.</p>
19.93	<p>Point for the C-E $\frac{1}{16}$ sec. cor. of sec. 3. Set the iron post 12 ins. below the surface, brass cap mkd.</p>
	<p style="text-align: center;">T6S R24E C $\frac{E.1/16.}{S 3}$ C 1965</p>
24.12	<p>Intersect the 1916 record meander line of the right bank of the Gila River, bears S. $54^{\circ}15'$ E. and N. $54^{\circ}15'$ W., and point for the special meander cor. Set the iron post 22 ins. in the ground, brass cap mkd.</p>
	<p style="text-align: center;">T6S R24E C $\frac{S}{3}$ C SMC 1972</p> <p>Set a steel fence post, 5 ft. long, 18 ins. in the ground alongside the iron post.</p>
33.27	<p>Intersect the 1875 adjusted record meander line of the right bank of the Gila River, bears S. $47^{\circ}48'$ E. and N. $47^{\circ}48'$ W. This point is not monumented.</p>
39.86	<p>The C $\frac{1}{4}$ sec. cor. of sec. 3.</p>
41.35	<p>The present right bank of the Gila River, a cut bank, 5 ft. high, bears S. $63^{\circ}47'$ E. and N. $63^{\circ}47'$ W.</p>
49.35	<p>Intersect the 1875 adjusted record meander line of the right bank of the Gila River, bears N. $74^{\circ}10'$ E. and S. $74^{\circ}10'$ W. This point is not monumented.</p>
56.26	<p>Present channel of the Gila River, 220 lks. wide, 1 ft. deep, flows NW.</p>
57.61	<p>The present left bank of the Gila River, a cut bank 5 ft. high, bears SE. and NW.; this point is not monumented; thence through dense undergrowth.</p>
59.81	<p>Point for the C-W $\frac{1}{16}$ sec. cor. of sec. 3; this point is not monumented.</p>

Subdivision, Section 3, T. 6 S., R. 24 E.

CHAINS	
72.40	Present high bank, 6 ft. high, bears NE. and S. 35° W., end of dense undergrowth; thence through moderate undergrowth.
77.30	The present left bank of the Gila River, 3½ ft. high, bears N. 30° E. and S. 30° W.
78.70	The present channel of the Gila River, 120 lks. wide, 1 ft. deep, flows S. 27° W.
79.77	Intersect the true point for the ½ sec. cor. of secs. 3 and 4. Land, nearly level. Soil, sandy loam. Timber, moderate willow and mesquite along river. Undergrowth, moderate to dense salt cedar.
	From the E 1/16 sec. cor. of secs. 3 and 10. N. 0°34' E., on the N-S centerline of the SE¼ of sec. 3. Over cultivated land.
11.30	Leave cultivated land, bears irreg. E. and W.; enter dense undergrowth.
18.98	Point selected for the witness SE 1/16 sec. cor. of sec. 3 on the natural left bank of the Gila River, a cut bank, 4 ft. high, bears N. 85°55' E. and S. 86°19' W. Set an iron post 22 ins. in the ground for the witness SE 1/16 sec. cor. of sec. 3, brass cap mkd. <div style="text-align: center;"> T6S R24E W↑C SE 1/16 S 3 1967 </div> Set a squared willow post, 4 ft. long, 4 ins. diam., alongside the iron post. Thence over low gravel bar.
19.78	True point for the SE 1/16 sec. cor. falls on a low gravel bar where the monument cannot be perpetuated.
23.00	Present channel of the Gila River, 150 lks. wide, 1 ft. deep, flows N. 70° W.
26.08	The present right bank of the Gila River, a dyke, 5 ft. high, bears S. 71°45' E. and a dyke 6 ft. high, bears N. 78°00' W.; this point is not monumented. Thence through moderate undergrowth.
31.87	Intersect the 1875 adjusted record meander line of the right bank of the Gila River, bears S. 61°39' E. and N. 61°39' W. This point is not monumented.



Subdivision, Section 3, T. 6 S., R. 24 E.

CHAINS	
<p>36.58</p>	<p>Intersect the 1916 record meander line of the right bank of the Gila River, bears S. 54°15' E. and N. 54°15' W., and point for the special meander cor.</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <div data-bbox="695 521 912 801" style="text-align: center;"> <p>T6S R24E</p> </div> <p>Set a steel fence post, 5 ft. long, 18 ins. in the ground alongside the iron post.</p>
<p>39.57</p>	<p>The C-E 1/16 sec. cor. of sec. 3.</p> <p>From the S 1/16 sec. cor. of secs. 2 and 3.</p> <p>N. 89°48' W., on the E-W centerline of the SE¼ of sec. 3.</p> <p>Over recently cleared land.</p>
<p>3.46</p>	<p>Point for the special meander cor. on the present right bank of the Gila River, a dyke, 6 ft. high, bears S. 63°33' E. and N. 63°33' W.</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <div data-bbox="630 1392 922 1564" style="text-align: center;"> <p>T6S R24E</p> </div> <p>Set a willow post, 4 ft. long, 3 ins. diam., 18 ins. in the ground, alongside the iron post.</p> <p>Thence over sand and gravel bar.</p>
<p>6.30</p>	<p>The present channel of the Gila River, 130 lks. wide, 1 ft. deep, flows N. 65° W.</p>
<p>9.10</p>	<p>The present left bank of the Gila River, a cut bank, 5 ft. high, bears S. 64°50' E. and S. 85°55' W., not monumented.</p> <p>Thence through moderate undergrowth, over a low gravel bar.</p>
<p>10.63</p>	<p>Intersect the 1875 adjusted record meander line of the right bank of the Gila River, bears S. 0°09' E. and N. 0°09' W. This point is not monumented.</p>
<p>19.92</p>	<p>The true point for the SE 1/16 sec. cor. of sec. 3.</p>

Subdivision, Section 3, T. 6 S., R. 24 E.

CHAINS	
30.57	Continue over low gravel bar. Intersect the 1916 record meander line of the left bank of the Gila River, bears S. 44°00' E. and N. 44°00' W. This point is not monumented.
34.34	Point for the special meander cor. on the present left bank of the Gila River, bears S. 36°27' E. and N. 29°56' W., a cut bank, 8 ft. high. Set the iron post 22 ins. in the ground, brass cap mkd.
	Set a cottonwood post, 5 ft. long, 4 ins. diam., 22 ins. in the ground, alongside the iron post.
34.54	Field road parallels bank.
34.70	Irrigation ditch, 8 lks. wide, 2 ft. deep, flows N. for 20 lks. to end; thence over cultivated land.
39.80	Irrigation ditch, 8 lks. wide, 2 ft. deep, flows N.
39.84	The C-S 1/16 sec. cor. of sec. 3.
Subdivision of Section 4, T. 6 S., R. 24 E.	
	From the 1/4 sec. cor. of secs. 4 and 9. N. 0°28' E., along the N. and S. centerline of sec. 4. Over nearly level land, through a farm yard.
3.87	Fence, bears S. 59°20' E. and N. 59°20' W.
4.47	Center of Southern Pacific Railroad tracks, bears S. 59°20' E. and N. 59°20' W.
6.57	Center of U. S. Highway No. 70, bears S. 58°26' E. and N. 58°26' W.
7.35	Fence, bears S. 58° E. and N. 58° W.; enter cultivated land.
13.02	Fence, bears E. and W.
13.67	Enter dense undergrowth, bears E. and W.
19.82	Fence, bears S. 10° E. and N. 10° W.
19.905	Point for the C-S 1/16 sec. cor. of sec. 4. This point is not monumented.
30.80	Leave dense undergrowth, bears SE. and N. 70° W.

Subdivision, Section 4, T. 6 S., R. 24 E.

CHAINS	
34.70	<p>The present left bank of the Gila River, 4 ft. high, bears SE. and N. 70° W.</p>
36.00	<p>Present channel of the Gila River, 90 lks. wide, 1 ft. deep, flows N. 80° W. from E.</p>
37.29	<p>The present right bank of the Gila River, a cut bank, 6 ft. high, bears N. 72°05' E. and N. 36°29' W. This point is not monumented.</p>
	<p>Thence through dense undergrowth.</p>
39.81	<p>Point for the C ¼ sec. cor. of sec. 4.</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p>
	<p style="text-align: center;">T6S R24E C ¼ + S4 1967</p>
	<p>Set a mesquite post, 3 ft. long, 3 ins. diam., 12 ins. in the ground, alongside the iron post.</p>
42.87	<p>Leave dense undergrowth, bears SE. and NW.; thence through moderate undergrowth.</p>
54.45	<p>Intersect the adjusted 1875 meander line of the right bank of the Gila River, bears S. 71°12' E. and N. 71°12' W., and point for the special meander cor.</p>
	<p>Set the iron post 22 ins. in the ground, brass cap mkd.</p>
	<p style="text-align: center;">T6S R24E C S 4  C SMC 1967</p>
	<p>Set a mesquite post, 5 ft. long, 4 ins. diam., 22 ins. in the ground, alongside the iron post.</p>
	<p>from which</p>
	<p>Point for the auxiliary meander cor. at intersection of the adjusted 1875 meander line, and the present right bank of the Gila River, bears N. 71°12' W., 8.11 chs. dist.</p>
	<p>Set the iron post 24 ins. in the ground, brass cap mkd.</p>
	<p style="text-align: center;">T6S R24E AMC  1967</p>
	<p>Set a mesquite post, 5 ft. long, 4 ins. diam., 24 ins. in the ground, alongside the iron post.</p>
57.50	<p>Intersect the 1916 record meander line of the right bank of the Gila River, bears S. 33°00' E. and N. 33°00' W. This point is not monumented.</p>

Subdivision, Section 4, T. 6 S., R. 24 E.

CHAINS	
57.77	Fence, bears NW. and SE., curving to S.; thence over cultivated land.
58.70	Fence, bears E. and W.
59.59	Point for the C-N 1/16 sec. cor. of sec. 4.
	Set the iron post 30 ins. below the surface, brass cap mkd.
	<p style="text-align: center;">T6S R24E C N 1/16 S 4 C 1967</p>
79.25	The 1/4 sec. cor. of sec. 4 on the N. bdy. of the Tp., previously described.
	<p>Land, nearly level. Soil, sandy loam. Timber, scattered mesquite along river area. Undergrowth, salt cedar along river area.</p>
	From the true point for the 1/4 sec. cor. of secs. 3 and 4.
	N. 89°21' W., along the E. and W. center line of sec. 4.
	Over river bottom.
1.00	The present right bank of the Gila River, bears N. 14° 40' E. and S. 22°55' W.; this point is not monumented.
2.23	Dyke, 4 ft. high, bears N. and S.; thence over cultivated land.
2.32	Power line, bears N. and S.
6.72	Intersect the 1916 record meander line of the right bank of the Gila River, bears N. 45°00' E. and S. 45° 00' W. This point is not monumented.
11.63	Irrigation ditch, 5 lks. wide, 1 ft. deep, flows S.
19.93	Point for the C-E 1/16 sec. cor. of sec. 4; this point is not monumented.
23.37	Intersect the 1916 record meander line of the right bank of the Gila River, bears S. 54°45' E. and N. 54° 45' W. This point is not monumented.
27.13	Dyke, 3 ft. high, bears SE. and NW., curving to W.; leave cultivated land.
32.83	Same dyke, bears N. 85° E. and S. 85° W. for 2 chs. to end.
34.83	Enter dense undergrowth, bears irreg. SE. and NW.
39.86	The C 1/4 sec. cor. of sec. 4.
40.37	Fence, bears SE. and NW.


Subdivision, Section 4, T. 6 S., R. 24 E.

CHAINS	
41.77	The present right bank of the Gila River, bears S. 36°29' E. and N. 38°52' W. This point is not monumented. Leave dense undergrowth; thence over low gravel bar.
52.90	Present channel of Gila River, 1.00 ch. wide, 1 ft. deep, flows N. 10° W. from curve to SE.
53.40	The present left bank of the Gila River, a cut bank, 6 ft. high, bears N. 10° W. and S. 10° E., curving to SE.; enter dense undergrowth.
58.70	Leave dense undergrowth; thence over cultivated land.
58.88	Graded road, bears N. and S.
59.38	Fence, bears N. and S.
59.68	Irrigation ditch, 8 lks. wide, 2½ ft. deep, flows N.
59.92	Point for the C-W 1/16 sec. cor. of sec. 4. This point is not monumented.
71.78	Concrete lined irrigation ditch, 10 lks. wide, 3 ft. deep, flows N.
72.18	Field dyke, 4 ft. high, bears S. 40° E. and N. 40° W.
79.97	The ½ sec. cor. of secs. 4 and 5. Land, nearly level. Soil, sandy loam. Timber, none. Undergrowth, salt cedar along river areas.
Subdivision of the SE½ of Section 4, T. 6 S., R. 24 E.	
From the E 1/16 sec. cor. of sec. 4 and 9. N. 0°29' E., on the N-S centerline of the SE½ of sec. 4. Over cultivated land.	
8.20	Leave cultivated land, enter dense undergrowth, bears E. and W.
17.73	The present left bank of the Gila River, a cut bank, 6 ft. high, bears N. 75°00' E. and N. 70°00' W.
18.52	Present channel of the Gila River, 2.00 chs. wide, 1 ft. deep, flows N. 70°00' W. from N. 80°00' E.
19.88	Point for the SE 1/16 sec. cor. of sec. 4 falls on a low gravel bar, and is not monumented. Thence over a low sand and gravel bar.
34.45	The present right bank of the Gila River, a cut bank, 5 ft. high, bears S. 57°10' E. and N. 47°18' W., thence through moderate undergrowth.
36.98	Dyke, 3 ft. high, bears E. and W.; thence over cultivated land.

Subdivision, Section 4, T. 6 S., R. 24 E.

CHAINS	
37.37	Intersect the 1916 record meander line of the right bank of the Gila River, bears S. 54°45' E. and N. 54°45' W. This point is not monumented.
39.75	The point for the C-E 1/16 sec. cor. of sec. 4.
Subdivision of the NW¼ of Section 4, T. 6 S., R. 24 E.	
From the point for the C-W 1/16 sec. cor. of sec. 4. N. 0°36' E., on the N-S centerline of the NW¼ of sec. 4. Over cultivated land.	
19.73	Point for the NW 1/16 sec. cor. of sec. 4. This point is not monumented.
28.30	Dirt road on top of dyke, bears S. 65° E. and N. 65° W.
28.50	Ft. Thomas Canal, 14 lks. wide, 5 ft. deep, flows N. 65° W.
29.00	Graded road, parallels irrigation ditch.
39.27	Intersect the N. bdy. of the Tp. (First Standard Parallel South).
Point for the W 1/16 sec. cor. on the N. bdy. of sec. 4, at midpoint between the N¼ sec. cor. of sec. 4 and the closing cor. of secs. 4 and 5. This point is not monumented.	
from which The standard cor. of secs. 32 and 33, previously described, bears S. 89°49' E., 7.68 chs. dist.	
From the C-N 1/16 sec. cor. of sec. 4. N. 89°29' W., on the E-W centerline of the NW¼ of sec. 4. Over cultivated land.	
0.50	End of cultivated land, bears irreg. N. and S.; enter moderate undergrowth.
0.95	Intersect the 1916 record meander line of the right bank of the Gila River, bears S. 11°30' E. and N. 11°30' W. This point is not monumented.
1.54	Fence, bears N. and S.
8.23	The present right bank of the Gila River, bears N. 26° 10' E. and S. 11°06' E., and point for the special meander cor. of sec. 4.
Set the iron post 22 ins. in the ground, brass cap mkd.	
Set a salt cedar post, 6 ft. long, 3 ins. diam., 22 ins. in the ground, alongside the iron post.	

Subdivision, Section 4, T. 6 S., R. 24 E.

CHAINS	
	The east end of a low concrete weir for Ft. Thomas Canal, bearing E. and W. across the Gila River, bears N. 26°10' E., 1.75 chs. dist.
9.90	Present channel of the Gila River, 1.00 ch. wide, 1 ft. deep, flows N. from S. 10° E.
10.70	Present left bank of the Gila River, bears irreg. N. and S.
14.92	Road on a dyke, 5 ft. high, bears irreg. N. and S.
20.01	Point for the NW 1/16 sec. cor. of sec. 4.
24.22	Track road, bears S. 45° E. from W.
32.02	Concrete lined irrigation ditch, 10 lks. wide, 2½ ft. deep, flows W.
40.02	The N 1/16 sec. cor. of secs. 4 and 5.
	<p style="text-align: center;"><u>Survey of Accretion Lands in Sec. 2</u></p> <p>A survey of accretion lands in the SW¼SW¼ of section 2 is made to segregate that portion attaching to lot 4 section 11, lot 18 section 3, and that portion inuring to public land in the SW¼SW¼ of section 2.</p> <p>Beginning at the proportionate point for the 1875 left bank meander corner of sections 2 and 11, hereinbefore described.</p> <p>N. 35°30' E., on a fixed boundary between public and riparian lands, over accreted lands, on a course normal to the present left bank of the Gila River.</p> <p>Over cultivated land.</p> <p>4.80 End of cultivation, bears E. and W.; thence through moderate undergrowth.</p> <p>12.14 The present left bank of the Gila River, a dyke 8 to 10 ft. high, bears S. 54°30' E. and N. 54°30' W., and point for the auxilliary meander corner at the NE. corner of lot 8.</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T6S R24E AMC</p>  </div> <p>Set a mesquite post, 4 ins. diam., 4 ft. long, alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the proportionate point for the 1875 left bank meander corner of sections 2 and 3, hereinbefore described.</p>


Survey of Accretion Lands in Sec. 2

CHAINS	
	<p>N. 35°30' E., on a fixed boundary between public and riparian lands, over accreted lands, on a course normal to the present left bank of the Gila River.</p> <p>Over cultivated land.</p>
0.90	<p>End of cultivation, bears E. and W., thence through moderate undergrowth.</p>
7.80	<p>Leave moderate undergrowth, bears S. 65° E. and N. 70° W.; thence through sparse undergrowth.</p>
10.46	<p>The present left bank of the Gila River, a dyke, 9 ft. high, bears S. 54°30' E. and N. 54°30' W., and point for the auxiliary meander corner at the NW. corner of lot 8.</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T6S R24E AMC NW Cor. Lot 8 Sec. 2 1970</p> </div> <p>Set a mesquite post, 4 ins. diam., 5 ft. long, alongside the iron post.</p>

Survey of Accretion Lands in Sec. 3

	<p>A survey of accretion lands in the NW¼SE¼ of section 3 is made to segregate that portion attaching to lots 7 and 9 section 3, and that portion inuring to public land in the NW¼SE¼ of section 3.</p> <p>Beginning at the 1916 right bank special meander corner on the N-S centerline of the SE¼ of sec. 3, hereinbefore described.</p> <p>S. 12° W., on a fixed boundary between public and riparian lands, over accreted lands, on a course normal to the present right bank of the Gila River.</p> <p>Over nearly level land through scattered salt cedar.</p>
10.29	<p>The present left bank of the Gila River, a dyke 6 ft. high, bears S. 78° E. and N. 78° W., and point for the auxiliary meander corner at the SE. cor. of lot 22.</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T6S R24E Sec. 3 Lot 22 SE Cor. AMC 1972</p> </div> <p>Set a steel fence post, 5 ft. long, 20 ins. in the ground alongside the iron post.</p>

Survey of Accretion Lands in Sec. 3

CHAINS	
12.35	<p>From the 1916 right bank meander corner on the E-W center line of sec. 3, hereinbefore described.</p> <p>S. 12° W., on a fixed boundary between public and riparian lands, over accreted lands, on a course normal to the present right bank of the Gila River.</p> <p>Over nearly level land, through scattered salt cedar.</p> <p>The present left bank of the Gila River, a dyke 6 ft. high, bears S. 78° E. and N. 78° W.; and point for the auxiliary meander corner at the SW. cor. of lot 22.</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;">  <p>T6S R24E Sec. 3 Lot 22 SW Cor. AMC 1972</p> </div> <p>Set a steel fence post, 5 ft. long, 18 ins. in the ground alongside the iron post.</p>
	<p style="text-align: center;">Traverses and Meanders of the Present Right Bank of the Gila River, T. 6 S., R. 24 E.</p>
	<p>The following notes are those of the traverse or meander of the present right bank of the Gila River, as indicated. Those designated as meanders front upon public land; those designated as traverse front upon patented land and are supplied herein for informational purposes only.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>Beginning at the point for the special meander cor. on the N-S center line of sec. 12, T. 6 S., R. 24 E.</p> <p>In sec. 12, along a well-defined bank, 4 ft. high, with the traverse of the right bank.</p> <p>N. 84°03' W., 8.02 chs.</p> <p>N. 72°40' W., 6.17 chs.</p> <p>N. 63°45' W., 4.03 chs.</p> <p>N. 50°17' W., 3.14 chs. At end of this course, intersect the point for the special meander cor. on the N-S centerline of the SW$\frac{1}{4}$ of sec. 12.</p> <p>N. 32°28' W., 6.29 chs. At end of this course, intersect the special meander cor. on the east-west centerline of sec. 12.</p>

Traverses and Meanders of the Present Right Bank of the Gila River, T. 6 S., R. 24 E.

CHAINS	
	<p>Thence</p> <p>With the meanders of the right bank of the river downstream, in front of Lot 15, sec. 12.</p> <p>N. 29°29' W., 10.32 chs.</p> <p>N. 47°40' W., 4.90 chs.</p> <p>N. 63°25' W., 3.82 chs.</p> <p>S. 84°38' W., 4.41 chs. At end of this course intersect the meander cor. on the W. bdy. of sec. 12.</p> <p>Land, low bottom land. Soil, sandy loam and gravelly loam. Timber, scattered mesquite, willow and cottonwood. Undergrowth, salt cedar.</p>
	<p>Thence in sec. 11, along a well-defined bank, 3 to 6 ft. high, with traverse of the present right bank.</p> <p>S. 81°18' W., 6.97 chs.</p> <p>S. 68°20' W., 8.68 chs.</p> <p>N. 82°00' W., 4.30 chs.</p> <p>N. 35°00' W., 3.53 chs.</p> <p>N. 9°00' E., 3.96 chs.</p> <p>N. 16°15' E., 4.00 chs.</p> <p>N. 0°45' W., 6.11 chs.</p> <p>N. 36°30' W., 4.43 chs.</p> <p>N. 66°00' W., 3.01 chs.</p> <p>N. 75°45' W., 7.82 chs.</p> <p>S. 75°03' W., 7.51 chs. At end of this course, intersect the special meander cor. on the north-south center line of sec. 11.</p>
	<p>Thence</p> <p>With the meanders of the right bank of the river downstream, in front of Lot 13, sec. 11.</p> <p>S. 72°30' W., 1.23 chs.</p> <p>West, 14.20 chs.</p> <p>N. 62°00' W., 2.90 chs.</p> <p>N. 50°45' W., 4.55 chs. At 2.54 chs. on this course, intersect the special meander cor. on the N-S centerline of the NW¼ of sec. 11; begin traverse.</p> <p>N. 18°00' W., 2.97 chs.</p> <p>N. 10°45' E., 2.07 chs. At end of this course, intersect the point for the meander cor. of secs. 2 and 11, not monumented.</p>

Traverse and Meanders of the Present Right
Bank of the Gila River, T. 6 S., R. 24 E.

CHAINS

Land, nearly level.
Soil, sandy to gravelly loam.
Timber, scattered cottonwood and willow.
Undergrowth, salt cedar.

From the meander cor. of secs. 2 and 3, previously described.

Thence in sec. 3, along top of dyke, 6 ft. high, with meanders of the present right bank of the river, downstream in the front of lot 24.

N. 63°33' W., 7.91 chs. At 3.84 chs. on this course, intersect the special meander cor. on the E-W centerline of the SE $\frac{1}{4}$ of sec. 3, thence with traverse.

N. 69°25' W., 7.64 chs.

N. 71°45' W., 5.90 chs. At end of this course, intersect the N-S centerline of the SE $\frac{1}{4}$ of sec. 3.

Thence with traverse along a dyke, 6 ft. high.

N. 78°00' W., 11.51 chs. At 2.08 chs. on this course, intersect the SE. corner of Lot 22, previously described, thence with meanders along the front of Lot 22.

At 6.77 chs. on this course, intersect the SW. cor. of Lot 22, previously described, thence with traverse.

N. 40°50' W., 9.88 chs.

N. 35°40' W., 3.57 chs. At end of this course, intersect the N-S center line.

N. 63°47' W., 2.32 chs. At 1.65 chs. on this course, intersect the E-W center line of sec. 3.

Thence along top of dyke, 4 to 6 ft. high.

N. 88°19' W., 4.26 chs.

S. 88°12' W., 5.08 chs.

N. 54°06' W., 4.36 chs.

N. 36°30' W., 5.57 chs.

N. 84°00' W., 2.83 chs. At end of this course, a 10 ins. well with electric pump, bears S., 10 lks. dist., thence along a cut bank, 4 ft. high.

N. 51°45' W., 4.74 chs.

N. 65°30' W., 2.76 chs.

Traverse and Meanders of the Present Right
Bank of the Gila River, T. 6 S., R. 24 E.

CHAINS	
S. 65°03' W., 3.95 chs.	Along a cut bank, 6 to 8 ft. high.
S. 63°20' W., 5.94 chs.	
S. 46°44' W., 5.02 chs.	At end of this course, intersect the point for the meander cor. of secs. 3 and 4, not monumented.
<p>Land, nearly level. Soil, sandy to gravelly loam. Timber, scattered mesquite. Undergrowth, scattered salt cedar.</p>	
Thence in sec. 4, over Markham Wash bottom with traverse.	
S. 14°40' W., 4.08 chs.	At 2.00 chs. on this course Markham Wash, 1.00 ch. wide, 2 ft. deep, drains S. 15° E. to the Gila River. At end of this course, intersect the E-W center line of sec. 4.
S. 22°55' W., 4.78 chs.	At end of this course, intersect a dyke, 6 ft. high, bears N. and S. 37°30' W., thence along top of dyke.
S. 37°30' W., 8.40 chs.	
N. 80°00' W., 3.82 chs.	To end of dyke, thence along a cut bank, 4 ft. high.
N. 57°10' W., 9.81 chs.	At end of this course, intersect the N-S centerline of the SE $\frac{1}{4}$ of sec. 4.
N. 47°18' W., 6.36 chs.	
N. 71°54' W., 3.25 chs.	At end of this course, intersect a dyke, bears S. 89°48' E. and N. 89°48' W., thence along top of dyke.
N. 89°48' W., 4.88 chs.	To end of dyke, thence along a cut bank, 4 to 6 ft. high.
S. 72°05' W., 7.59 chs.	At end of this course, intersect the N-S center line of sec. 4.
N. 36°29' W., 3.16 chs.	At end of this course, intersect the E-W center line of sec. 4.
N. 38°52' W., 6.87 chs.	
N. 18°14' W., 3.92 chs.	
N. 5°07' E., 4.41 chs.	

Traverse and Meanders of the Present Right
Bank of the Gila River, T. 6 S., R. 24 E.

CHAINS	
N. 8°09' W., 3.79 chs.	Intersect the auxiliary meander cor. on the adjusted 1875 meander line of the right bank of the Gila River, bearing S. 71°12' E. and N. 71°12' W.; thence with meander along front of Lot 17.
N. 11°06' W., 2.65 chs.	At end of this course, intersect the special meander cor. on the E-W centerline of the NW¼ of sec. 4; thence with traverse.
N. 26°10' E., 5.05 chs.	At 1.75 chs. on this course, intersect the E. end of a low concrete weir; extending W. across the Gila River.
N. 0°40' E., 4.19 chs.	
N. 14°06' E., 8.29 chs.	
N. 1°52' W., 2.84 chs.	At end of this course, intersect the point for the meander cor. on the N. bdy. of sec. 4. This point is not monumented.
<p>Land, nearly level. Soil, sandy to gravelly loam. Timber, scattered mesquite and cottonwood. Undergrowth, salt cedar.</p>	
<p>Traverse and Meanders of the Present Left Bank of the Gila River, T. 6 S., R. 24 E.</p>	
<p>The following notes are those of the traverse or meander of the present left bank of the Gila River, as indicated. Those designated as meanders front upon public land; those designated as traverse front upon patented land and are supplied herein for informational purposes only.</p>	
<p>From the special meander cor. on the E-W centerline of the SE¼ of sec. 12.</p>	
<p>Thence in sec. 12, along a cut bank, 4 to 6 ft. high, with meanders of the present left bank of the Gila River, along the front of lot 18.</p>	
N. 54°30' W., 2.30 chs.	
N. 71°00' W., 12.56 chs.	At end of this course, intersect the special meander cor. on the N-S center line of sec. 12.
N. 87°08' W., 8.03 chs.	Along the front of lot 17.
N. 73°55' W., 6.13 chs.	

Traverse and Meanders of the Present Left
Bank of the Gila River, T. 6 S., R. 24 E.

CHAINS	
	<p>N. 54°32' W., 7.35 chs. At end of this course, intersect the special meander cor. on the N-S centerline of the SW¼ of sec. 12, and end of meanders.</p>
	<p>N. 44°31' W., 6.86 chs. With traverse.</p>
	<p>N. 33°17' W., 4.04 chs. At end of this course, intersect the special meander cor. on the E-W centerline of sec. 12; end of traverse.</p>
	<p>N. 40°00' W., 10.00 chs. With meanders along the front of lot 16.</p>
	<p>N. 58°00' W., 7.60 chs. At end of this course, intersect the meander cor. of secs. 11 and 12.</p>
	<p>Land, nearly level. Soil, sandy to gravelly loam. Timber, scattered cottonwood and mesquite. Undergrowth, salt cedar.</p>
	<p>Thence in sec. 11, with traverse of the left bank along the mean high water line, for informational purposes only.</p>
	<p>S. 75°34' W., 5.43 chs.</p>
	<p>S. 70°30' W., 8.97 chs. At end of this course, begin traverse along a cut bank, 4 ft. high.</p>
	<p>West, 5.20 chs.</p>
	<p>N. 60°30' W., 2.81 chs.</p>
	<p>N. 24°30' W., 4.83 chs.</p>
	<p>N. 0°45' E., 3.49 chs.</p>
	<p>N. 33°30' E., 1.76 chs.</p>
	<p>N. 11°00' E., 5.01 chs. At end of this course, thence along mean high water line.</p>
	<p>N. 25°00' W., 3.27 chs.</p>
	<p>N. 56°00' W., 4.74 chs.</p>
	<p>N. 61°00' W., 2.95 chs.</p>
	<p>West, 6.42 chs.</p>
	<p>S. 69°49' W., 4.37 chs. At end of this course, intersect the N-S center line of sec. 11.</p>
	<p>S. 83°36' W., 6.59 chs.</p>

Traverse and Meanders of the Present Left
Bank of the Gila River, T. 6 S., R. 24 E.

CHAINS	
N. 80°00' W., 8.11 chs.	At 4.60 chs. on this course, thence along a cut bank, 4 to 6 ft. high.
N. 77°00' W., 4.44 chs.	
N. 49°45' W., 5.36 chs.	At 1.38 chs. on this course, intersect the N-S centerline of the NW¼ of sec. 11.
N. 16°00' W., 3.16 chs.	
N. 2°09' W., 3.29 chs.	Intersect the point for the meander cor. of secs. 2 and 11.
<p>Land, nearly level. Soil, sandy to gravelly loam. Timber, scattered cottonwood and mesquite. Undergrowth, salt cedar.</p>	
<p>Thence in sec. 2, with traverse and meanders of the present left bank of the Gila River.</p>	
<p>Along a cut bank, 4 ft. high, with traverse of the present left bank.</p>	
N. 10°00' E., 5.60 chs.	At end of this course, intersect the easterly end of a dyke, 8 to 10 ft. high, bears N. 70°00' W.
N. 70°00' W., 3.90 chs.	Along a dyke, 8 to 10 ft. high.
N. 54°30' W., 10.00 chs.	<p>At 5.30 chs. on this course, intersect the auxiliary meander corner for the NE. corner of lot 8; thence with meanders along the front of lot 8.</p>
	<p>At 8.69 chs. on this course, intersect the auxiliary meander corner for the NW. corner of lot 8; thence with traverse.</p>
N. 77°32' W., 5.01 chs.	<p>Leave dyke at a break in dyke, thence along a low bank, 3 ft. high.</p>
	<p>At end of this course, intersect the point for the meander cor. of secs. 2 and 3.</p>
<p>From the point for the meander cor. of secs. 2 and 3, previously described.</p>	
<p>Thence in sec. 3, along a cut bank, 4 to 6 ft. high, with traverse of the present left bank.</p>	

Traverse and Meanders of the Present Left
Bank of the Gila River, T. 6 S., R. 24 E.

CHAINS

N. 77°32' W., 4.15 chs.

N. 33°12' W., 5.08 chs.

N. 64°50' W., 2.43 chs. At end of this course, intersect the E-W centerline of the SE $\frac{1}{4}$ of sec. 3.

S. 85°55' W., 10.86 chs. At end of this course, intersect the N-S centerline of the SE $\frac{1}{4}$ of sec. 3.

S. 86°19' W., 5.94 chs. At end of this course, intersect the E. end of a dyke, bearing N. 86°00' W., thence along top of dyke.

N. 86°00' W., 8:00 chs. To end of dyke, thence along a cut bank, 6 to 8 ft. high.

N. 36°27' W., 0.85 chs. At end of this course, intersect the special meander cor. on the E-W centerline of the SE $\frac{1}{4}$ of sec. 3; thence with meanders along the front of Lot 23.

N. 29°56' W., 2.99 chs.

N. 52°33' W., 4.98 chs. At end of this course, intersect the special meander cor. on the N-S centerline of sec. 3.

It was not necessary to meander or traverse the present left bank beyond this point.

Land, nearly level.

Soil, sandy loam.

Timber, scattered mesquite and cottonwood.

Undergrowth, salt cedar.

Retracement of a Portion of the 1916 Meanders
of the Gila River, T. 6 S., R. 24 E.

The following field notes are those of the retracement of a portion of the meanders of the Gila River as surveyed by A. B. Rich in 1916. This retracement is for informational purposes.

From the proportionate point for the meander cor. of secs. 11 and 12.

Thence in sec. 12, upstream with the 1916 record right bank meanders.

Over level land, through moderate to dense undergrowth.

Retracement of a Portion of the 1916 Meanders
of the Gila River, T. 6 S., R. 24 E.

CHAINS	
S. 75°25' E., 9.46 chs.	At 8.25 chs. on this course, intersect the E-W center line of the NW¼ of sec. 12.
S. 58°00' E., 1.70 chs.	
S. 56°15' E., 5.80 chs.	
S. 66°15' E., 8.30 chs.	At 4.90 chs. on this course, intersect the N-S center line of the NW¼ of sec. 12.
S. 40°30' E., 9.70 chs.	
S. 51°30' E., 5.90 chs.	
S. 33°45' E., 16.30 chs.	At 1.38 chs. on this course, intersect the E-W center line of sec. 12.
	At 10.38 chs. on this course, intersect the N-S center line of sec. 12.
S. 73°15' E., 8.20 chs.	
N. 81°15' E., 5.20 chs.	
N. 74°30' E., 24.40 chs.	At end of this course, intersect the proportionate point for the 1916 meander cor. of secs. 7 and 12, on the E. bdy. of the Tp.
From the proportionate point for the meander cor. of secs. 2 and 11.	
Thence in sec. 11, upstream with a partial retracement of the 1916 record right bank meanders.	
Over level land, through dense undergrowth.	
S. 35°45' E., 5.40 chs.	
S. 47°15' E., 3.25 chs.	Intersect the N-S center line of sec. 11.
From the proportionate point for the meander cor. of secs. 2 and 3.	
Thence in sec. 3, downstream with a partial retracement of the 1916 record right bank meanders.	
Over cultivated land.	
N. 60°45' W., 4.60 chs.	
N. 54°15' W., 24.57 chs.	At 19.44 chs. on this course, intersect the 1916 right bank special meander corner on the N-S centerline of the SE¼ of sec. 3. End of course, intersect the 1916 right bank special meander corner on the E-W centerline of sec. 3.

Retracement of a Portion of the 1916 Meanders
of the Gila River, T. 6 S., R. 24 E.

CHAINS

From the proportionate point for the meander cor. of secs. 4 and 33, on the N. bdy. of the Tp.

Thence in sec. 4, upstream with a partial retracement of the 1916 record right bank meanders.

Over level land, through dense undergrowth.

S. 11°30' E., 21.06 chs. At 10.00 chs. on this course, leave dense undergrowth, thence over cultivated land. At 19.83 chs. on this course, intersect the E-W center line of the NW¼ of sec. 4.

S. 33°00' E., 1.33 chs. Intersect the N-S center line of sec. 4.

From the proportionate point for the meander cor. of secs. 3 and 10.

Thence in sec. 3, downstream with a partial retracement of the 1916 record left bank meanders.

Over cultivated land.

N. 52°00' W., 1.70 chs.

N. 89°30' W., 1.00 chs.

N. 50°00' W., 0.90 chs.

N. 60°00' W., 13.50 chs.

N. 44°00' W., 29.25 chs. At 6.00 chs. on this course, enter dense undergrowth. At 14.80 chs. on this course, intersect the present left bank of the Gila River, bears S. 86°00' E. and N. 86°00' W. Thence over river bottom area. At end of this course, intersect the N-S center line of sec. 3.

Retracement of a Portion of the 1875 Meanders
of the Gila River, T. 6 S., R. 24 E.

The following field notes are those of the retracement of a portion of the meanders of the Gila River as surveyed by T. F. White in 1875. This retracement is for informational purposes.

From the proportionate point for the meander cor. of secs. 4 and 32, on the N. bdy. of the Tp.

Thence in sec. 4, with a retracement of the adjusted 1875 record right bank meanders, upstream.

Over level land, through moderate to dense undergrowth.

Retracement of a Portion of the 1916 Meanders
of the Gila River, T. 6 S., R. 24 E.

CHAINS		
S. 2°50' E., 13.30 chs.		
S. 15°34' E., 7.12 chs.		
S. 70°12' E., 5.05 chs.		
N. 81°04' E., 3.23 chs.	At end of this course, intersect the present left bank of the Gila River, bears irreg. N. and S.	
S. 71°12' E., 10.89 chs.	At 2.78 chs. on this course, the auxiliary meander cor. previously described. At end of this course, intersect the special meander cor. on the N-S center line of sec. 4, previously described.	
From the proportionate point for the meander cor. of secs. 3 and 4.		
Thence in sec. 3, upstream with a retracement of the adjusted 1875 record right bank meanders.		
Over level land, through moderate to dense undergrowth.		
S. 55°21' E., 10.12 chs.		
S. 48°33' E., 4.96 chs.		
S. 83°52' E., 6.34 chs.		
N. 11°10' E., 4.48 chs.		
N. 44°17' E., 8.16 chs.		
N. 28°01' E., 5.27 chs.	At 3.37 chs. on this course, intersect the present left bank of the Gila River, bears SE. and NW.	
N. 74°10' E., 4.95 chs.	At 3.23 chs. on this course, intersect the E-W center line of sec. 3. At 4.57 chs. on this course, intersect the present right bank of the Gila River, bears N. 88°12' E. and S. 88°12' W., enter cultivated land, bears irreg. E. and W.	
N. 49°40' E., 6.34 chs.		
N. 78°27' E., 4.45 chs.	At 3.11 chs. on this course, intersect the N-S center line of sec. 3.	
S. 43°01' E., 6.36 chs.		
S. 47°48' E., 2.88 chs.	At 1.20 chs. on this course, intersect the E-W center line of sec. 3.	

Retracement of a Portion of the 1875 Meanders
of the Gila River, T. 6 S., R. 24 E.

CHAINS	
S. 64°10' E., 10.70 chs.	
S. 45°32' E., 1.99 chs.	
S. 61°39' E., 11.50 chs.	At 1.10 chs. on this course, intersect the N-S center line of the SE¼ of sec. 3.
S. 0°09' E., 14.52 chs.	At 4.01 chs. on this course, intersect the present right bank of the Gila River, bears S. 69°25' E. and N. 69°25' W. At 7.17 chs. on this course, intersect the E-W center line of the SE¼ of sec. 3. At 7.28 chs. on this course, intersect the present left bank of the Gila River, bears N. 85°55' E. and S. 85°55' W., enter moderate to dense undergrowth, bears irreg. E. and W.
S. 35°27' E., 2.09 chs.	
S. 61°29' E., 8.13 chs.	
S. 53°57' E., 2.59 chs.	At end of this course, intersect the proportionate point for the meander cor. of secs. 2 and 3.
<p>From the proportionate point for the meander cor. of secs. 11 and 12.</p> <p>Thence in sec. 12, upstream with a computed retracement of the adjusted 1875 record right bank meanders, and, calculated intersections for informational purposes.</p>	
S. 18°08' E., 8.40 chs.	At 1.65 chs. on this course, intersect the present right bank of the Gila River, bears N. 84°38' E. and S. 84°38' W. At 4.64 chs. on this course, intersect the present left bank of the Gila River, bears S. 58°00' E. and N. 58°00' W.
S. 45°24' E., 2.20 chs.	
S. 82°10' E., 11.58 chs.	At 4.49 chs. on this course, intersect the present left bank of the Gila River, bears S. 40°00' E. and N. 40°00' W. At 9.99 chs. on this course, intersect the present right bank of the Gila River, bears S. 29°29' E. and N. 29°29' W.
S. 79°55' E., 3.79 chs.	

Retracement of a Portion of the 1875 Meanders
of the Gila River, T. 6 S., R. 24 E.

CHAINS	
S. 32°23' E., 5.40 chs.	At 0.98 chs. on this course, intersect the N-S center line of the NW¼ of sec. 12. At 4.10 chs. on this course, intersect the E-W center line of sec. 12.
N. 71°03' E., 5.19 chs.	At 3.35 chs. on this course, intersect the E-W center line of sec. 12.
S. 79°55' E., 3.70 chs.	At 3.54 chs. on this course, intersect the E-W center line of sec. 12.
N. 47°44' E., 2.93 chs.	At 0.04 chs. on this course, intersect the E-W center line of sec. 12. At 2.93 chs. on this course, intersect the 1916 record right bank meander line of the Gila River, bears S. 51° 30' E. and N. 51°30' W. The computed retracement and calculated intersections are ended here.
General Description	
<p>Most of Township 6 South, Range 24 East, is situated upon desert benchland, which has a moderate growth of creosote brush, mesquite and cacti. The Gila River courses through the northeast portion of the township in a northwesterly direction. The bottom land adjacent to both sides of the river varies from ½ mile to 1½ miles in width and is nearly all under cultivation. The soil in the Gila Valley is a rich, sandy loam.</p> <p>History of the Gila Valley indicates that those areas along the banks of the Gila River that were cleared of all undergrowth suffered heavy damage from the periodic major floods that occur about every 20 years, the latest of which occurred in December 1965. Since this latest flood, landowners and canal companies have been active in building dykes along and within the actual river bottom to contain and direct the flow of water.</p> <p>The elevation ranges from about 2,760 ft. above sea level along the Gila River in sec. 4 to about 3,200 ft. above sea level along the south boundary of the township.</p> <p>No mining activity was noted.</p>	

BOOK 4933

Form 4-680
(June 1963)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Louis D. Gilbert	Cadastral Surveyor
Donald Beauchamp	Surveying Aid
Loyal E. Steele	Surveying Aid
Jerrold E. Knight	Supervisory Surveying Technician
Ray E. Thiessen	Surveying Aid
Martin W. Fuller	Surveying Aid
Arvel R. Jones	Surveying Aid
Jerrel L. Jones	Surveying Aid
Willard R. Wilber	Surveying Aid
Harry K. Smith	Surveying Technician

61

CERTIFICATE OF SURVEY

We, Leonard W. Murphy, Frank W. Rogers and Paul G. Bauer, HEREBY CERTIFY upon honor that,

in pursuance of special instructions bearing date of the 28th day of February, 1964, and Supplemental Special Instructions dated the 23rd day of February, 1965, we have dependently resurveyed a portion of the east boundary, a portion of the north boundary (First Standard Parallel South) and a portion of the subdivisional lines, and surveyed subdivisions in Secs. 3, 4, 11 and 12, accretion land in Secs. 2 & 3, traversed and meandered the present banks of the Gila River in Sections 3, 4, 11 and 12 and retraced a portion of the record meanders of the Gila River in Sections 3, 4, 11 and 12, Township 6 South, Range 24 East,

of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

June 15, 1967 (Date) Leonard W. Murphy (Cadastral Surveyor)
June 15, 1967 (Date) Frank W. Rogers (Surveying Technician)
March 20, 1972 (Date) Paul G. Bauer (Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date OCT 16 1969 APR 20 1972 FEB 23 1971

BUREAU OF LAND MANAGEMENT, Washington, D. C.

The foregoing field notes of the dependent resurvey of a portion of the east boundary, a portion of the north boundary (First Standard Parallel South), and a portion of the subdivisional lines, and the survey of subdivisions in Sections 3, 4, 11 and 12, accretion land in Secs. 2 & 3, the traverse and meanders of the present banks of the Gila River in Sections 3, 4, 11 and 12 and the retracement of a portion of the record meanders of the Gila River in Sections 3, 4, 11 and 12, Township 6 South, Range 24 East, of the Gila and Salt River Meridian, Arizona,

executed by Leonard W. Murphy, Frank W. Rogers & Paul G. Bauer having been critically examined and found correct, are hereby approved.

MAY 4 1972 (Date) Clark F. Lamm (Chief, Division of Engineering) Cadastral Survey

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in, is a true copy of the original field notes.

(Date) (Chief, Division of Engineering) Cadastral Survey