

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF

A PORTION OF THE ABANDONED FORT VERDE GARDEN RESERVATION,

A PORTION OF THE ABANDONED CAMP VERDE MILITARY RESERVATION,

A PORTION OF THE EAST BOUNDARY,

A PORTION OF THE NORTH BOUNDARY,

A PORTION OF THE SUBDIVISIONAL LINES,

AND

THE SUBDIVISIONAL SURVEY

OF CERTAIN SECTIONS

AND

THE RESURVEY OF THE 1892 MEANDERS OF THE LEFT BANK

OF THE VERDE RIVER AND THE MEANDERS OF THE

PRESENT LEFT BANK OF THE VERDE RIVER

THROUGH SECTION 5,

TOWNSHIP 13 NORTH, RANGE 5 EAST

Of the GILA AND SALT RIVER Meridian,

In the State of ARIZONA

EXECUTED BY

HARRY K. SMITH,

CADASTRAL SURVEYOR

Under special instructions dated OCTOBER 19, 19 73, approved OCTOBER 19, 1973,

, which provided for the surveys included under U.S. Survey/Group
Number 564, and assignment instructions dated OCTOBER 19, 19 73.

Survey commenced NOVEMBER 13, 19 73

Survey completed APRIL 2, 19 75


1A

1A

BOOK 5072

INDEX DIAGRAM

Township 13 North, Range 5 East

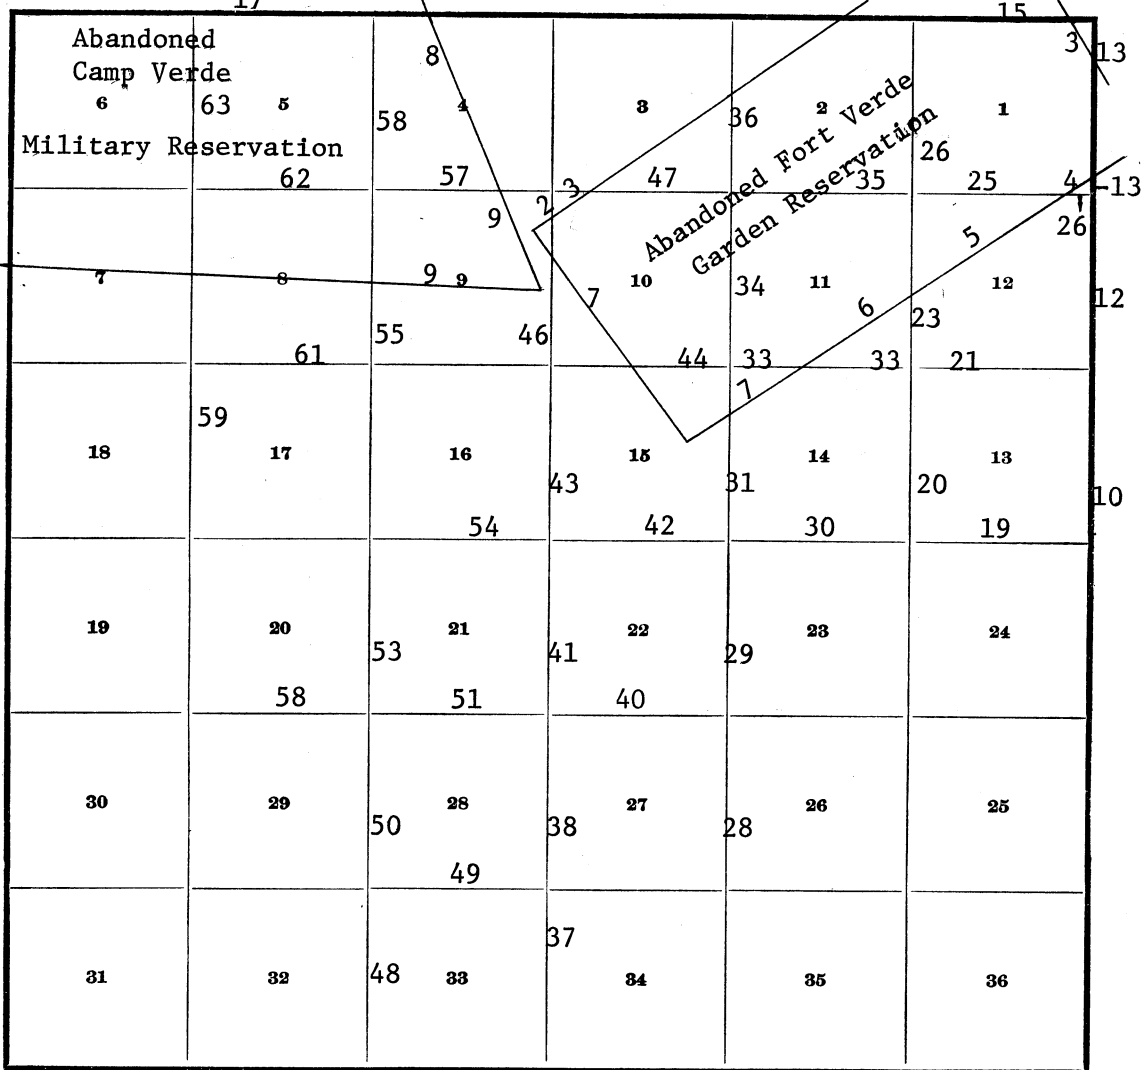

Subdivision, Sec. 1 - Page 64
 " " 5 " 70
 " " 9 " 73
 " " 11 " 75
 " " 12 " 80
 " " 13 " 86
 " " 14 " 91
 " " 15 " 94
 " " 17 " 98
 " " 20 " 101
 " " 21 " 103
 " " 22 " 105
 " " 27 " 107
 " " 28 " 110
 " " 33 " 113
 " " 34 " 115

Resurvey, Meanders, Sec. 5 - Page 116
 Meanders, Sec. 5..... " 117

Township 13 North, Range 5 East
Gila and Salt River Meridian, Arizona

CHAINS

The following field notes are those of the dependent resurvey of a portion of the abandoned Fort Verde Garden Reservation, a portion of the abandoned Camp Verde Military Reservation, portions of the east and north boundaries, a portion of the subdivisional lines, the subdivisional survey of certain sections, the resurvey of the 1892 meanders of the left bank of the Verde River through section 5, and the meanders of the present left bank of the Verde River through section 5, Township 13 North, Range 5 East, Gila and Salt River Meridian, Arizona.

The boundaries of the abandoned Camp Verde Military Reservation were surveyed by Geo. M. Wheeler, of the Corps. of Engineers in 1869, prior to a public-land subdivisional survey of the area. The south four miles of the east boundary, the south boundary, (Third Standard Parallel North), the south four miles of the west boundary, the west two miles of the north boundary and a portion of the subdivisional lines were surveyed by C. Burton Foster Deputy Surveyor, in 1873. The boundaries of the abandoned Camp Verde Military Reservation were surveyed by 1st. Lieut. E. D. Thomas, 5th Cavalry, Acting Engineer Officer Department of Arizona, in 1876, and connected to the rectangular survey established by Foster. The description of the reservation boundaries returned by Thomas was incorrect and was corrected by General Order No. 1, dated January 6, 1879. The boundaries of the abandoned Fort Verde Garden Reservation, a portion of the east and north boundaries and the subdivisional lines within the abandoned Fort Verde Garden Reservation were surveyed by Clarence H. Wallace, Deputy Surveyor, in 1887. A portion of the west and north boundaries, that portion of the abandoned Camp Verde Military Reservation within the township, and a portion of the subdivisional lines were resurveyed and the meanders of the Verde River within the abandoned Camp Verde Military Reservation were surveyed by Daniel Drummond, Deputy Surveyor, in 1892. A portion of the east boundary, a portion of the south boundary, (Third Standard Parallel North), a portion of the north boundary, a portion of the abandoned Fort Verde Garden Reservation, a portion of the abandoned Camp Verde Military Reservation, and a portion of the subdivisional lines were resurveyed and portions of the east, west and north boundaries and a portion of the subdivisional lines were surveyed by William H. Richards, Jr., U. S. Surveyor, in 1916. In 1919, field corrections of the north, south and west $\frac{1}{2}$ section corners of section 20, within the township, were made by Sidney E. Blout, U.S. Cadastral Engineer. A portion of the south boundary, (Third Standard Parallel North), and a portion of the subdivisional lines were resurveyed; a portion of the south and west boundaries and a portion of the subdivisional lines were surveyed by Benjamin J. Kinsey and Ty White, both U.S. Transitmen, in 1923. A portion of the west boundary was resurveyed by Leroy R. Hanson, U.S. Transitman, in 1928. A portion of the north boundary was resurveyed by Horace M. Muscott, U.S. Surveyor, in 1938. A portion of the north boundary was resurveyed by Leonard W. Murphy, Cadastral Surveyor, in 1966. Certain corners along the west and north boundaries and within

Township 13 North, Range 5 East
Gila and Salt River Meridian, Arizona

CHAINS

the township were remonumented by Boyd S. Owens, Cadastral Surveyor, in 1964.

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1947, and Special Instructions for Group 564, Arizona, dated October 19, 1973.

Preliminary to the resurvey the lines of the previous surveys and resurveys were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The directions of lines were determined by direct solar observations, checked by triangulation stations in the area, and refer to the true meridian.

The geographic position of the corner of sections 13 and 24, on the east boundary of the township, as determined by a tie to the United States Coast and Geodetic Survey triangulation station "MESA" is as follows:

Latitude $34^{\circ} 30' 39.5''$ N. Longitude $111^{\circ} 45' 58.1''$ W.

The mean magnetic declination is $13^{\circ} 45'$ E.

Dependent Resurvey of a Portion of the abandoned Fort Verde Garden Reservation T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

(Restoring a portion of the survey executed by Clarence H. Wallace, Deputy Surveyor, in 1887 and a portion of the resurvey executed by William H. Richards, Jr., U.S. Surveyor, in 1916)

From Cor. No. 1, identical to the Initial Monument, of the abandoned Fort Verde Garden Reservation, monumented with a limestone, firmly set, 14x14x10 ins. above ground, chisel marks visible but illegible. A mound of stone, 3 ft. base, 1½ ft. high, is E of the cor.; not remonumented.

N. $55^{\circ} 05'$ E., along line 1-2 of the abandoned Fort Verde Military Reservation, through sec. 9.

Over gently rolling land, through scattering timber and medium undergrowth.

9.85 Forest Highway No. 9, asphalt surfaced, bears S. 47° E. and N. 47° W.

10.38 Pt. for the closing cor. of secs. 9 and 10, at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey, Portion of the Abandoned Fort Verde
Garden Reservation, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS

Set an iron post, 28 ins. long, 2½ ins. diam., 21 ins. in the ground, with brass cap mkd.

S 9 | S 10
T 13 N R 5 E
C C
1974

Raise a mound of stone, 3 ft. base, 1½ ft. high, S of the cor.

N. 54°42' E., through sec. 10, beginning new measurement.

Over gently rolling land, through scattering timber and medium undergrowth.

9.90 Spur, slopes N. 35° W.

16.20 Bladed dirt road, bears N. 80° E. and S. 80° W.

20.215 The closing cor. of secs. 3 and 10, monumented with a limestone, firmly set, 6x6x8 ins. above ground, mkd. FVGR CC on the E face, with a mound of stone, 2 ft. base, 1 ft. high, E of the cor.; not remonumented.

This pt. functions for inside the reservation only.

From the closing cor. of secs. 1 and 36, on the N bdy. of the Tp. and on line 2-3 of the abandoned Fort Verde Garden Reservation, monumented with a limestone, firmly set 10x9x8 ins. above ground, mkd. FVGR CC on the W face, with a mound of stone, 3 ft. base, 2 ft. high, W of the cor.; not remonumented.

S. 34°51' E., along line 2-3 of the abandoned Fort Verde Garden Reservation, through sec. 1,

Over rolling land, through scattering timber and dense undergrowth.

20.14 The closing cor. of secs. 1 and 6, monumented with a limestone, 13x8x7 ins., firmly set 6 ins. in the ground, mkd. FVGR CC on the S face, with a scattered mound of stone S of the cor.

At the cor. pt.


Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

S 1 | S 6
R 5 E R 6 E
T 13 N
C C
1974

Dependent Resurvey, Portion of the Abandoned Fort Verde
Garden Reservation, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, S of the cor.</p> <hr/> <p>From the closing cor. of secs. 1 and 6, Tps. 13 N., Rs. 5 and 6 E., on the E bdy. of the Tp. and on line 3-4 of the abandoned Fort Verde Garden Reservation, monumented with a limestone, firmly set 10x6x10 ins. above ground, mkd. FVGR on the NW face, with a mound of stone, 3 ft. base, 6 ins. high, N of the cor.; not remonumented. This pt. functions for inside the reservation only.</p> <p>From this pt., Cor. No. 3, the NE cor. of the abandoned Fort Verde Garden Reservation, bears N. 54°54' E., 30.60 chs. dist., monumented with a limestone, firmly set 14x6x12 ins. above ground, mkd. FVGR on the W face, with a mound of stone, 2½ ft. base, 1½ ft. high, W of the cor.</p> <p>S. 55°00' W., on line 3-4 of the abandoned Fort Verde Garden Reservation, along the S bdy. of sec. 1.</p> <p>Over gently rolling land, through medium undergrowth.</p>
.90	Wash, 30 lks. wide, 1 ft. deep, drains S. 25° W.
2.77	<p>The closing cor. of secs. 1 and 6, Tps. 13 N., Rs. 5 and 6 E., monumented with an iron post, 3 ins. diam., projecting 12 ins. above ground, with brass cap mkd. as described in the official record of the 1916 survey of part of the E bdy. of T. 13 N., R. 5 E.. A mound of stone, 3 ft. base, 6 ins. high, is S of the cor.</p> <hr/> <p>S. 55°03' W., in sec. 1, beginning new measurement.</p> <p>Over gently rolling land, through medium undergrowth.</p>
8.10	Fence, bears E and W.
11.10	Wash, 20 lks. wide, 3 ft. deep, drains W.
12.80	Same wash, 20 lks. wide, 2 ft. deep, drains S.
13.28	<p>Pt. for the closing cor. of secs. 1 and 12, at proportionate dist., bet. the closing cor. of secs. 1 and 6, Tps. 13 N., Rs. 5 and 6 E., for outside the reservation, and the closing cor. of secs. 11 and 12, as recorded in 1916 by William H. Richards, Jr., U.S. Surveyor; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 13 N S 1 CC S12 R 5 E 1973</p> </div> <p>from which</p> <p>A juniper, 4 ins. diam., bears S. 45° E., 63 lks. dist., mkd. with an X at breast height and BT at the base.</p>

Dependent Resurvey, Portion of the Abandoned Fort Verde
Garden Reservation, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

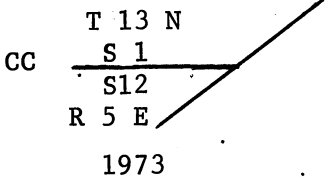CHAINS	
	<p>Raise a mound of stone, 3 ft. base, 2½ ft. high, E of the cor.</p> <p>This cor. functions for outside the reservation only.</p> <p>Thence S. 55°03' W., bet. secs. 1 and 12, continuing measurement.</p>
14.40	Wash, 60 lks. wide, 3 ft. deep, drains S.
14.75	<p>Pt. for the closing cor. of secs. 1 and 12, at proportionate dist., bet. the closing cor. of secs. 1 and 6, Tps. 13 N., Rs. 5 and 6 E., for outside the reservation, and the closing cor. of secs. 11 and 12, as recorded in 1916 by William H. Richards Jr., U.S. Surveyor; there is no remaining evidence of the original cor.</p> <p>Both the official plat and field notes of 1916 are in error. Based on the acreage recorded for Lot 12 of sec. 1, the dist. bet. the closing cor. of secs. 1 and 12 for inside the reservation, and the closing cor. of secs. 1 and 6, Tps. 13 N., Rs. 5 and 6 E., for inside the reservation, should have been recorded as 17.52 chs. dist., instead of 13.28 chs. dist.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;">  <p>T 13 N S 1 S12 R 5 E 1973</p> </div> <p>from which</p> <p>A mesquite, 8 ins. diam., bears N. 7°15' W., 109 lks. dist., mkd. T13N R5E S1 CC BT.</p> <p>Raise a mound of stone, 4 ft. base, 2 ft. high, N of the cor. for protection from flood water.</p> <p>This cor. functions for inside the reservation only.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 54°53' W., through sec. 12, beginning new measurement.</p> <p>Over gently rolling land, through medium undergrowth.</p>
2.00	Track road, bears N and S.
6.00	Track road, bears N. 85° E. and S. 85° W.
12.30	Right bank of a wash, 30 ft. high, bears N. 70° E. and S. 70° W., thence along right edge of same wash.
17.30	Right bank of same wash, bears N and S.
21.80	Gully, 12 ft. deep, drains S. 70° W.
29.70	Draw, drains S. 10° W.
31.00	Wash, 100 lks. wide, 1 ft. deep, drains S. 70° W.

Dependent Resurvey, Portion of the Abandoned Fort Verde
Garden Reservation, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
36.90	Wash, 100 lks. wide, 3 ft. deep, drains S.
52.10	Right bank of wash, 20 ft. high, bears N. 80° E. and S. 80° W., thence along bottom of same wash.
57.10	Right bank of same wash, 20 ft. high, bears S. 15° E. and N. 25° W.
59.90	Wash, 40 lks. wide, 30 ft. deep, drains S.
69.38	Fence, bears S. 80° E. and N. 80° W.; track road, bears N. 50° E. and S. 50° W.
73.90	Track road, bears N. 50° E. and S. 50° W.
78.00	Track road, bears S. 30° E. and N. 30° W.
79.70	Power line, bears S. 3° E. and N. 3° W.
80.01	The closing cor. of secs. 11 and 12, monumented with a granite stone, firmly set 10 x 6 x 4 ins. above ground, mkd. FVGR CC on the N face, with a mound of stone, 2½ ft. base, 1 ft. high, N of the cor.; not remonumented.
	S. 55°52' W., through sec. 11, beginning new measurement.
	Over gently rolling land, through medium undergrowth.
4.90	Power line, bears N. 75° E. and S. 75° W.
7.40	Forest Highway No. 9, asphalt surfaced, bears S. 75° E. and N. 75° W.
22.00	Enter residential area.
42.90	Power line, bears N. 85° E. and S. 85° W.
46.00	Asphalt road, bears N and S.
46.40	Power line, bears N and S.
49.50	Power line, bears E and W.
53.30	Graded gravel road, bears E and W.
54.20	Fence, bears S. 55° E. and N. 55° W. Enter medium timber and undergrowth, bears S. 55° E. and N. 55° W.
60.825	Pt. for the closing cor. of secs. 11 and 14, established in 1873 by C. Burton Foster, Deputy Surveyor, is at proportionate dist. bet. the closing cor. of secs. 11 and 12, heretofore described, and the closing cor. of secs. 14 and 15, hereinafter described; there is no remaining evidence of the original cor. Not monumented.
	This pt. functions for outside the reservation only.
	Thence, S. 55°52' W., bet. secs. 11 and 14, continuing measurement.
62.60	Pt. for the closing cor. of secs. 11 and 14, established in 1887 by Clarence H. Wallace, Deputy Surveyor; there is no remaining evidence of the original cor., hereinafter described.


Dependent Resurvey, Portion of the Abandoned Fort Verde
Garden Reservation, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
	<p>This pt. functions for inside the reservation only.</p> <p>Thence, S. 55°52' W., through sec. 14, continuing measurement.</p>
68.40	Wash, 50 lks. wide, 3 ft. deep, drains W.
79.10	Clear Creek, 75 lks. wide, 1 ft. deep, course W.
90.40	Stream, 15 lks. wide, 1 ft. deep, course N. 30° W.
92.30	Fence, bears S. 20° E. and N. 20° W., thence through cleared residential area.
100.175	<p>Pt. for the closing cor. of secs. 14 and 15; hereinafter described.</p> <p>Thence, S. 55°52' W., in sec. 15, continuing measurement.</p>
100.40	Bladed dirt road, bears N and S.
106.00	Bladed dirt road, bears N and S.
114.00	Enter grove of timber, edge bears N and S.
124.485	<p>Pt. for Cor. No. 4, of the abandoned Fort Verde Garden Reservation, at intersection of line 3-4, extended from the closing cor. of secs. 11 and 12 through the reestablished closing cor. of secs. 14 and 15, and line 4-1, extended from the closing cor. of secs. 9 and 10 through the closing cor. of secs. 10 and 15; there is no remaining evidence of the original cor. Not monumented.</p> <p>From this pt., the closing cor. of secs. 10 and 15, on line 4-1 of the abandoned Fort Verde Garden Reservation, bears N. 35°04' W., 43.455 chs. dist., monumented with a limestone, 16 x 9 x 6 ins., set in a mound of stone, 2 ft. base, 6 ins. high, no marks visible.</p> <p>At the cor. pt.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 13 N C S10 C S15 R 5 E 1974</p> </div> <p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, W of the cor.</p> <p>Deposit the unmarked stone alongside the iron post.</p> <p>From the pt. for Cor. No. 4, the closing cor. of secs. 9 and 10, on line 4-1 of the abandoned Fort Verde Garden Reservation, bears N. 35°04' W., 105.035 chs. dist., monumented with a limestone, 12 x 10 x 9 ins., set in a mound of stone, 2 ft. base, 8 ins. high, no marks visible.</p> <p>At the cor. pt.</p>

Dependent Resurvey, Portion of the Abandoned Fort Verde
Garden Reservation, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS

Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.



Raise a mound of stone, 2½ ft. base, 1½ ft. high, S of the cor.

Deposit the unmarked stone alongside the iron post.

Dependent Resurvey, Portion of Abandoned Camp Verde
Military Reservation, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona


(Restoring a portion of the survey executed by Geo. M. Wheeler, of the Corps of Engineers, in 1869, a portion of the survey executed by 1st Lieut. E.D. Thomas, Acting Engineer Officer, of the 5th Cavalry, Department of Arizona, in 1876, a portion of the resurvey executed by Daniel Drummond, Deputy Surveyor, in 1892, and a portion of the resurvey executed by William H. Richards, Jr., U.S. Surveyor, in 1916.)

From the closing cor. of secs. 4 and 33, on the N. bdy. of the Tp. and on line 4-5 of the abandoned Camp Verde Military Reservation, monumented with a limestone, 15 x 10 x 7 ins. above ground, mkd. CVMR CC on the W face, with a mound of stone, 3 ft. base, 2½ ft. high, E of the cor. Not remonumented.

S. 21°51' E., along line 4-5 of the abandoned Camp Verde Military Reservation, through sec. 4.

Over rolling land, through dense undergrowth.

- 26.90 Wash, 30 lks. wide, with walls 7 ft. high, drains SW.
- 69.50 Wash, 30 lks. wide, 4 ft. deep, drains S. 60° W.
- 73.50 Forest Highway No. 9, asphalt surfaced, bears S. 40° E. and N. 40° W.
- 84.20 Graded gravel road, bears N. 60° E. and S. 60° W.
- 87.58 The closing cor. of secs. 4 and 9, monumented with an iron post, 2 ins. diam., projecting 12 ins. above ground, with brass cap mkd.



A mound of stone, 2½ ft. base, 1 ft. high, is E of the cor.

Dependent Resurvey, Portion of Abandoned Camp Verde
Military Reservation, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS		
	Thence, S. 21°51' E., in sec. 9, beginning new measurement.	
34.70	Spur, slopes W.	
44.04	Fence, bears E and W.	
51.87	Cor. No. 5, the SE cor. of the abandoned Camp Verde Military Reservation, monumented with a wood post, 5 x 3 ins., projecting 4 ft. above ground, encircled by a mound of stone, 3 ft. base, 1 ft. high.	
	from which	
	A local re-bar, ½ in. diam., projecting 10 ins. above ground, bears West, .7 lks. dist.	
	N. 86°34' W., along line 5-1 of the abandoned Camp Verde Military Reservation, through sec. 9.	
	Over rolling land, through medium undergrowth.	
36.96	Fence, bears S and N, 2.5 lks. dist., to a fence cor., fences extend S and N. 86°34' W., thence along fenceline.	
45.80	Graded gravel road, bears S. 5° E. and N. 5° W., thence over level land, along N edge of a cultivated field.	
77.40	Pt. for the closing cor. of secs. 8 and 9, at intersection with the sec. line bet. secs. 8 and 9; there is no remaining evidence of the original cor. Not monumented.	
	from which	
	A local cor., a metal bolt, 1 in. diam., set flush with the ground, bears N. 10° W., 4 lks. dist.	
	A local iron post, 2½ ins. diam., projecting 26 ins. above ground, bears S. 1°40' W., 108 lks. dist., with brass cap mkd.	
	RANCHO ROCA ROJA C.V.M.R.	
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 2px;">N.W. Cor.</td> </tr> </table>	N.W. Cor.
N.W. Cor.		
	SUR 1940	
	A fence cor., bears N. 1°40' E., 40 lks. dist.; fences extend N. 1°40' E., S. 86°34' E., S. 1°40' W.	
	This pt. is located at the NW cor. of a cultivated field.	
	From this pt., the ¼ sec. cor. of secs. 7 and 8, identical with the initial monument on the S. bdy. of the abandoned Camp Verde Military Reservation, bears N. 86°34' W., 78.72 chs. dist., monumented with a basalt stone, 20 x 7 x 7 ins., buried 6 ins. underground, mkd. ¼ on the W face.	

Dependent Resurvey, Portion of Abandoned Camp Verde
 Military Reservation, T. 13 N., R. 5 E.,
 Gila and Salt River Meridian, Arizona

CHAINS					
	<p>from the $\frac{1}{4}$ sec. cor. of secs. 7 and 8</p> <p>A dead cottonwood, 65 ins. diam., bears S. $89^{\circ}30'$ E., 145 lks. dist., no marks visible.</p> <p>A hedge tree, 23 ins. diam., bears S. 80° E., 32 lks. dist. This tree is located on patented land; the tree is not scribed.</p> <p>A power pole, bears N. $33^{\circ}30'$ W., 50 lks. dist.</p> <p>The cor. is located E of the center of a gravel road, bearing N and S, and in the center of the projection of a blacktop road, to the N; also 7 lks. S of a concrete irrigation canal, flows S. 80° E. Not remonumented.</p> <hr/> <p>Dependent Resurvey of a Portion of the East Boundary of T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona</p> <hr/> <p>Reestablishment of the Survey Executed by William H. Richards, Jr., U.S. Surveyor, in 1916</p> <hr/> <p>From the cor. of secs. 13 and 24, on the E. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., projecting 8 ins. above ground, with brass cap mkd. as described in the official record of the 1964 remonumentation of cadastral survey cors. in T. 13 N., R. 5 E., with a mound of stone, $2\frac{1}{2}$ ft. base, 18 ins. high, W of the cor. Add the marks S18 1973 to the brass cap which is now mkd.</p> <div style="text-align: center;"> <p>T 13 N R 5 E R 6 E.</p> <table style="margin: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S13</td> <td style="padding: 0 5px;">S18</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S24</td> <td></td> </tr> </table> <p>1964 1973</p> </div> <p>N. $0^{\circ}03'$ W., on the E. bdy. of sec. 13.</p> <p>Over rolling land, through scattering timber and undergrowth.</p> <p>Along the E side of an abandoned fence, bears N and S.</p>	S13	S18	S24	
S13	S18				
S24					
6.90.	Descend to creek bottom; abandoned N and S fence ends here.				
11.70	Bottom of descent; thence over creek bottom land.				
13.00	South fork of Clear Creek, 20 lks. wide, 1 ft. deep, course W,				
17.40	North fork of Clear Creek, 80 lks. wide, 2 ft. deep, course S. 85° W.				
19.69	The S $\frac{1}{16}$ sec. cor. of sec. 13 only, monumented with a local open end pipe, $\frac{3}{4}$ in. diam., projecting 10 ins. above ground, in a mound of stone, 18 ins. base and 6 ins. high. This position is harmoniously related to existing survey corners in the immediate area and is				

Dependent Resurvey of a Portion of the East Boundary of
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS													
	accepted as the cor. position; not remonumented.												
	—————												
	N. 0°03' W., beginning new measurement.												
1.55	Irrigation ditch, 10 lks. wide, 3 ft. deep, flows N. 75° W.												
1.60	Fence, bears S. 85° E. and N. 85° W.; enter Forest Service Clear Creek campgrounds, bears S. 85° E. and N. 75° W.												
2.40	Gravel road, bears S. 80° E. and N. 80° W.												
4.80	Ditch, 40 lks. wide, 5 ft. deep, drains S. 55° W.												
11.70	Fence and N edge of Forest Service Clear Creek campgrounds, bears S. 70° E. and N. 70° W.; enter rolling broken land, bears S. 70° E. and N. 70° W.												
19.61	The ¼ sec. cor. of sec. 13 only; monumented with an iron post, 1 in. diam., projecting 18 ins. above ground, set in a mound of stone, 3 ft. base, 6 ins. high, with brass cap mkd. as described in the official record of the 1916 resurvey of part of the E. bdy. of T. 13 N., R. 5 E. A mound of stone, 3 ft. base, 1 ft. high, is W of the cor.												
	—————												
	N. 0°03' W., beginning new measurement.												
	Ascending.												
17.00	Draw, drains S. 50° E.												
30.90	Top of ascent.												
37.27	The closing corner for secs. 7 and 18, T. 13 N., R. 6 E., monumented with an iron post, 2 ins. diam., set in a mound of stone, 2½ ft. base, 18 ins. high, to top of pipe, with brass cap mkd. as described in the official record of the 1916 survey of T. 13 N., R. 6 E. A mound of stone, 2½ ft. base, 18 ins. high, is E of the cor. Add the marks R5E 1973, brass cap is now mkd.												
	<table style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 0 10px;">T 13 N</td> <td></td> </tr> <tr> <td style="padding: 0 10px;">T 5 E</td> <td style="border-left: 1px solid black; padding-left: 5px;">R 6 E</td> </tr> <tr> <td style="padding: 0 10px;">S 13</td> <td style="border-left: 1px solid black; padding-left: 5px;">S 7</td> </tr> <tr> <td></td> <td style="border-left: 1px solid black; padding-left: 5px; border-bottom: 1px solid black;">S 18 CC</td> </tr> <tr> <td></td> <td style="padding-left: 5px;">1973</td> </tr> <tr> <td></td> <td style="padding-left: 5px;">1916</td> </tr> </table>	T 13 N		T 5 E	R 6 E	S 13	S 7		S 18 CC		1973		1916
T 13 N													
T 5 E	R 6 E												
S 13	S 7												
	S 18 CC												
	1973												
	1916												
39.50	Wash, 20 lks. wide, 2 ft. deep, drains N. 65° E.												
40.13	The witness cor. of secs. 12 and 13 only, monumented with an iron post, 3 ins. diam., projecting 12 ins. above ground, with brass cap mkd. as described in the official record of the 1916 resurvey of part of the E. bdy. of T. 13 N., R. 5 E. A mound of stone, 2½ ft. base, 2 ft. high, is W of the cor. Add the marks R6E S 7 1973 and an arrow pointing to the true pt. for the cor.; the brass cap is now mkd.												

Dependent Resurvey of a Portion of the East Boundary of
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<div style="text-align: center;"> <p>T. 13 N R 5 E ↑ R 6 E</p> <p>$\frac{S12}{S13}$ S 7</p> <p>WC 1916 1973</p> <hr style="width: 20%; margin: 0 auto;"/> </div>
	<p>N. 0°05' W., beginning new measurement.</p>
.65	<p>True pt. for the cor. of secs. 12 and 13 only, at proportionate dist., is in a wash, 15 lks. wide, 2 ft. deep, drains E; impractical to monument.</p> <p>Land, rolling. Soil, shallow and rocky. Timber, scattering cottonwood and sycamore along creek bottom, scattering juniper in remainder. Undergrowth, mesquite, catclaw and cacti.</p>
	<p>From the true pt. for the cor. of secs. 12 and 13 only.</p>
	<p>N. 0°05' W., along the E. bdy. of sec. 12.</p>
	<p>Over rolling land, through scattering undergrowth.</p>
10.40	<p>Fence, bears N. 60° E. and S. 60° W.</p>
15.00	<p>Spur, slopes SW.</p>
40.02	<p>The $\frac{1}{4}$ sec. cor. for sec. 12 only, monumented with an iron post, 1 in. diam., projecting 9 ins. above ground, with brass cap mkd. as described in the official record of the 1916 survey of part of the E. bdy. of T. 13 N., R. 5 E. A mound of stone, 2$\frac{1}{2}$ ft. base, 1 ft. high, is W of the cor.</p>
	<p>N. 0°07' W., beginning new measurement.</p>
7.20	<p>Fence, bears N. 65° E. and S. 65° W.</p>
18.60	<p>Wash, drains W. (Scaled from U.S.G.S. topographic map).</p>
20.20	<p>Gravel road, bears N. 70° E. and S. 70° W.</p>
23.90	<p>Fence, bears N. 70° E. and S. 70° W.</p>
26.00	<p>Ridge, bears N. 70° E. and S. 70° W.</p>
32.50	<p>Track road, bears S. 60° E. and N. 60° W.</p>
36.58	<p>The closing cor. of secs. 6 and 7, T. 13 N., R. 6 E., monumented with an iron post, 2 ins. diam., projecting 10 ins. above ground, with brass cap mkd. as described in the official record of the 1916 survey of T. 13 N., R. 6 E.</p>
40.06	<p>True pt. for the cor. of secs. 1 and 12 only, at proportionate dist., is in a wash, 15 lks. wide, 2 ft. deep, drains westerly; impractical to monument.</p>

Dependent Resurvey of a Portion of the East Boundary of
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS


Land, rolling and mountainous.
Soil, shallow and rocky.
Undergrowth, catclaw, mesquite, scrub oak and cacti.
No timber.

From the true pt. for the cor. of secs. 1 and 12 only.

N. 0°07' W., along the E. bdy. of sec. 1.

Over broken rolling land, through medium to dense undergrowth and thinly scattered timber.

- .15 The witness cor. of secs. 1 and 12 only, monumented with an iron post, 3 ins. diam., projecting 8 ins. above ground, with brass cap mkd. as described in the official record of the 1916 survey of part of the E. bdy. of T. 13 N., R. 5 E. Add the marks S6 1974 and an arrow pointing to the true cor. pt. Brass cap is now mkd.




A mound of stone, 2½ ft. base, 1 ft. high, is W of the cor.

- 7.62 The closing cor. of secs. 1 and 6, on line 3-4 of the abandoned Fort Verde Garden Reservation, heretofore described. This cor. functions for outside the reservation only.

From this point the closing cor. of secs. 1 and 6 on the E. bdy. of the Tp., for inside the abandoned Fort Verde Garden Reservation, bears N. 55°00' E., 2.77 chs. dist., heretofore described.

(Reestablishing the Survey executed by Clarence H. Wallace, Deputy Surveyor, in 1887, and Resurvey Executed by William H. Richards, U.S. Surveyor, in 1916.)

From the cor. of secs. 1 and 6 only, the NE cor. of the Tp., monumented with an iron post, 3 ins. diam., projecting 12 ins. above ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd. R5E R6E on the N½ and T13N S1 S6 1916 on the S½. Remark brass cap to read



Dependent Resurvey of a Portion of the East Boundary of
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A mound of stone, 3 ft. base, 2 ft. high, is S of the cor.</p> <p>S. 0°05' E., along the E. bdy. of sec. 1.</p> <p>Over rolling land, through dense creosote brush and scattering juniper.</p>
16.59	<p>The closing cor. of secs. 1 and 6, on line 2-3 of the abandoned Fort Verde Garden Reservation, heretofore described.</p> <p>From this pt., Cor. No. 3 of the abandoned Fort Verde Garden Reservation, bears S. 34°55' E., 43.01 chs. dist., heretofore described.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 0°22' W., beginning new measurement.</p>
3.465	<p>Pt. for the N 1/16 sec. cor. of sec. 1 only, at proportionate dist.; not monumented.</p>
3.80	<p>Wash, 10 lks. wide, 2 ft. deep, drains SW.</p>
23.275	<p>The 1/4 sec. cor. of sec. 1 only, monumented with a limestone, 18 x 12 x 10 ins., firmly set, projecting 6 ins. above ground, mkd. 1/4 on the W face, with a scattered mound of stone W of the cor.</p> <p>At the cor. pt.</p> <p>Set an iron post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T 13 N R 5 E R 6 E 1/4 S 1 1974</p> </div> <p>Deposit the mkd. stone alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 0°26' W., beginning new measurement.</p>
9.80	<p>Wash, 25 lks. wide, 2 ft. deep, drains W.</p>
13.60	<p>Spur, slopes W.</p>
14.10	<p>Enter gently rolling land, bears E and W.</p>
19.75	<p>Pt. for the S 1/16 sec. cor. of sec. 1 only, at proportionate dist.; not monumented.</p>
23.80	<p>Track road, bears N. 70° E. and S. 70° W.</p>
26.20	<p>Wash, 20 lks. wide, 4 ft. deep, drains S. 60° W.</p>
29.58	<p>The closing cor. of secs. 1 and 6, on line 3-4 of the abandoned Fort Verde Garden Reservation, heretofore described.</p>

Dependent Resurvey of a Portion of the East Boundary of
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS

This pt. functions for inside the reservation only.

From this pt., Cor. No. 3 of the abandoned Fort Verde Garden Reservation, bears N. 54°54' E., 30.60 chs. dist., heretofore described.

Land, rolling to gently rolling.
Soil, sandy loam with some limestone outcroppings.
Timber, scattered juniper.
Undergrowth, creosote bush, palo verde, mesquite and cacti.

Dependent Resurvey of a Portion of the North Boundary,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

Reestablishment of the Survey executed by
Clarence H. Wallace, Deputy Surveyor, in 1887

From the cor. of secs. 1 and 6 only, the NE cor. of the
Tp.

S. 89°46' W., along the N. bdy. of sec. 1.

Over rolling mountainous land, through scattering juniper
and medium undergrowth.

1.40 Draw, drains S. 35° W.

4.00 Low spur, slopes S.

4.80 Draw, drains S. 80° E.

7.40 Spur, slopes S. 15° E.

9.40 Draw, drains S. 10° E.

10.60 Spur, slopes S.

11.48 The closing cor. of secs. 1 and 36, on line 2-3 of the
abandoned Fort Verde Garden Reservation, heretofore described.

From this point, the closing cor. of secs. 1 and 6 on
line 2-3 of the abandoned Fort Verde Garden Reservation,
bears S. 34°51' E., 20.14 chs. dist., heretofore described.

S. 89°51' W., beginning new measurement.

.80 Draw, drains S. 10° E.

3.30 Spur, slopes S. 25° E.

8.455 Pt. for the E 1/16 sec. cor. of sec. 1 only, at propor-
tionate dist., based on the 1890 official survey plat;
not monumented.

Dependent Resurvey of a Portion of the North Boundary,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
10.50	Spur, slopes S.
13.60	Spur, slopes S. 20° E.
28.26	<p>The ¼ sec. cor. of sec. 1 only, monumented with a mound of stone, 1½ ft. base, 6 ins. high. This position is harmoniously related to identified existing survey cors. in the area and is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. pt.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 21 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;"> <u>T 14 N R 5 E</u> ¼ S 1 T 13 N R 5 E 1974 </p> <p>Raise a mound of stone, 3 ft. base, 1½ ft. high, S of the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89°51' W., beginning new measurement.</p>
16.90	Draw, drains N. 10° E.
19.87	Pt. for the W 1/16 sec. cor. of sec. 1 only; not monumented.
26.80	Ridge, bears SE and NW.
35.70	Rock fence, bears S. 20° E. and N. 20° W.
36.70	Draw, drains NW.
39.74	<p>The cor. of secs. 1 and 2 only, monumented with a limestone, 18 x 10 x 5 ins., firmly set 6 ins. in the ground, mkd. with 1 groove on the E and 4 grooves on the W faces, with a mound of stone, 2½ ft. base, 3 ft. high, E of the cor.</p> <p>At the cor. pt.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground and in a mound of stone, 2½ ft. base to top, with brass cap mkd.</p> <p style="text-align: center;"> <u>T 14 N R 5 E</u> S35 <u>S 2 S 1</u> T 13 N R 5 E 1974 </p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Land, mountainous. Soil, shallow and rocky. Timber, juniper. Undergrowth, creosote, palo verde and cacti.</p>

Dependent Resurvey of a Portion of the North Boundary,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Reestablishment of a Portion of the Survey Executed by C. Burton Foster, Deputy Surveyor, in 1873, the Resurvey Executed by Daniel Drummond, Deputy Surveyor, in 1892, and the Resurvey Executed by Leonard W. Murphy, Cadastral Surveyor, in 1966</p> <hr/> <p>From the $\frac{1}{4}$ sec. cor. of secs. 5 and 32, on the N. bdy. of the Tp., monumented with an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., buried 2 ins. below the earth's surface, with brass cap mkd. as described in the official record of the 1966 resurvey of a portion of the S. bdy. of T. 14 N. R. 5 E.</p> <p>At the cor. pt.</p> <p>Reset the iron post, 24 ins. in the ground and in a collar of stone, 1 ft. base to top. Add the date, 1974, to the brass cap.</p> <p>from which</p> <p style="padding-left: 40px;">A mesquite, 6 ins. diam., bears S. $73^{\circ}30'$ E., 120.5 lks. dist., mkd. $\frac{1}{2}$ S5 BT.</p> <p style="padding-left: 40px;">A fence cor., bears S. $53^{\circ}15'$ E., 8 lks. dist.; fences extend N, E and W.</p> <p>Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, S of the cor., to avoid interference with a metal gate which is N of the cor.</p> <p>N. $89^{\circ}59'$ W., bet. secs. 5 and 32.</p> <p>Over level land, along fence bearing E and W.</p>
11.50	Fence cor., fences extend N. 15° E., East, and S. 15° W. Enter river bottom land through medium timber.
12.20	Irrigation canal, 30 lks. wide, flows S. 10° W.
12.90	Pt. for the meander cor. of secs. 5 and 32, on the present left bank of the Verde River, 3 to 5 ft. high, bears N. $25^{\circ}52'$ E. and S. $25^{\circ}52'$ W.; not monumented.
14.33	Pt. for the 1892 meander cor. of secs. 5 and 32, on the left bank of the Verde River, at proportionate dist.; there is no remaining evidence of the original cor. Not monumented.
17.30	The present right bank of the Verde River, 2 ft. high, bears N. 15° E. and S. 15° W.
18.10	Dirt road, bears S. 30° E. and N. 30° W.
21.12	The meander cor. of secs. 5 and 32, set on the right bank of the Verde River in 1966, monumented with an iron post, $2\frac{1}{2}$ ins. diam., buried 2 ins. below the ground, with brass cap mkd. as described in the official record of the 1966. resurvey of the S. Bdy. of T. 14 N., R. 5 E.

Dependent Resurvey of a Portion of the North Boundary,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
	At the cor. pt.
	Reset the iron post, 20 ins. in the ground, and add the date, 1974, to the brass cap.
	Raise a mound of stone, 2 ft. base, 1½ ft. high, W of the cor.

	N. 89°58' W., beginning new measurement.
.54	Fence, bears N. 15° E. and S. 15° W., thence over level land, along a fence bearing E and W.
10.20	Fence cor.; fences extend E, S and W.
10.30	Irrigation ditch, 5 lks. wide, 1 ft. deep, flows S.
10.52	The meander cor. of secs. 5 and 32, on the right bank of the Verde River as it existed in 1892, monumented with an iron post, 2½ ins. diam., projecting 5 ins. above ground, with brass cap mkd. as described in the official record of the 1966 resurvey of the S. bdy. of T. 14 N., R. 5 E.
	The cor. is located in a fenceline, bearing E and W.

	N. 89°59' W., beginning new measurement.
	Along a fence, bearing E and W.
.50	Fence cor.; fences extend N, E and S.
.80	E edge of a graded dirt road, projecting W., thence along same road.
6.10	Intersection of roads; Forest Highway No. 9, asphalt surfaced, bears S. 15° E. and N. 15° W., a graded dirt road projects E, and an asphalt road projects W.
6.70	Power line, bears S. 15° E. and N. 15° W.
8.40	The cor. of secs. 5, 6, 31 and 32, monumented with an iron post, 2½ ins. diam., set in a receptacle in an asphalt road, with brass cap mkd. as described in the official record of the 1966 resurvey of the S. bdy. of T. 14 N., R. 5 E.
	from which the reference monuments
	An iron post, 2½ ins. diam., projecting 3 ins. above ground, with brass cap mkd. S32 RM 27 ft. 1966 and an arrow pointing to the cor., bears N. 45°00' E., 40.9 lks. dist.
	An iron post, 2½ ins. diam., set flush with the ground, with brass cap mkd. S31 RM 27 ft. 1966 and an arrow pointing to the cor., bears N. 45°00' W., 40.9 lks. dist.
	The cor. is set in a receptacle, 8 ins. diam., near the W edge of an asphalt road, bearing E and W.

Dependent Resurvey of a Portion of the North Boundary,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS

Land, level to gently rolling.
Soil, sandy and rocky in river bottom; remainder is sandy loam.
Timber, cottonwood in river bottom.
Undergrowth, salt cedar and mesquite along the river bottom.

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

(Restoring a portion of the survey executed by C. Burton Foster, Deputy Surveyor, in 1873, a portion of the survey executed by Clarence H. Wallace, Deputy Surveyor, in 1887, a portion of the resurvey executed by Daniel Drummond, Deputy Surveyor, in 1892, a portion of the resurvey executed by William H. Richards, Jr., U.S. Surveyor, in 1916, and a portion of the resurvey executed by Benjamin J. Kinsey and Ty White, U.S. Transitmen, in 1923.)

From the cor. of secs. 13 and 24 only, on the E. bdy. of the Tp., heretofore described.

S. 85°51' W., bet. secs. 13 and 24.

Over nearly level land, through scattering undergrowth.

.04 Abandoned fence, bears N and S.

19.86 The E 1/16 sec. cor. of secs. 13 and 24, monumented with a local open end pipe, 1 in. diam., projecting 6 ins. above ground, in a mound of stone, 3 ft. base, 6 ins. high. This position is harmoniously related to existing survey corners in the immediate area and is accepted as the cor.; not remonumented.

S. 85°49' W., beginning new measurement.

3.90 Fence, bears S. 30° E. and N. 30° W.

4.90 Forest Highway No. 9, gravel surfaced, bears S. 30° E. and N. 30° W.

5.50 Fence, bears S. 30° E. and N. 30° W.

13.30 Fence, bears S. 60° E. and N. 60° W.

14.10 Graded dirt road, bears S. 60° E. and N. 60° W.

15.00 Fence, bears S. 60° E. and N. 60° W.

19.86 The 1/4 sec. cor. of secs. 13 and 24, monumented with an iron post, 2 1/2 ins. diam., projecting 8 ins. above ground, with brass cap mkd. as described in the official record of the 1964 remonumentation of cadastral survey cors. in T. 13 N., R. 5 E.

A mound of stone, 3 ft. base, 2 ft. high, is N of the cor.

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
	<p>N. 89°26' W., beginning new measurement.</p> <p>Over open level land.</p>
20.24	Point for the W 1/16 sec. cor. of secs. 13 and 24; not monumented.
21.27	A rebar, 1/2 in. diam., projecting 3 ins. above ground.
40.42	Fence, bears N and S.
40.48	<p>The cor. of secs. 13, 14, 23 and 24, monumented with an iron post, 2 1/2 ins. diam., projecting 8 ins. above ground, with brass cap mkd. as described in the official record of the 1964 remonumentation of cadastral survey cors. in T. 13 N., R. 5 E.</p> <p>A mound of stone, 3 ft. base, 2 ft. high, is W of the cor.</p> <p>Land, nearly level to gently rolling. Soil, clay loam and rocky. Undergrowth, scattered mesquite, catclaw and cacti, mostly in the E 1/4 mile; no timber.</p>
	<p>N. 0°10' E., bet. secs. 13 and 14.</p> <p>Over gently rolling land, through medium undergrowth.</p> <p>Along a N and S fence.</p>
19.985	<p>The S 1/16 sec. cor. of secs. 13 and 14, monumented with a local open end pipe, 1/2 in. diam., projecting 4 ins. above ground. This position is harmoniously related to existing survey corners in the immediate area and is accepted as the cor.; not remonumented.</p>
	<p>N. 0°10' E., beginning new measurement.</p>
.90	Fence, bears S. 50° E. and N. 50° W.
1.40	Graded dirt road, bears S. 65° E. and N. 65° W.
2.00	Fence, bears S. 65° E. and N. 65° W.
19.985	<p>The 1/4 sec. cor. of secs. 13 and 14, monumented with a local open end pipe, 1 1/2 in. diam., projecting 3 ft. above ground. This position is harmoniously related to existing survey cors. in the immediate area and is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. pt.</p> <p>Set a brass tablet, 3 ins. diam., 2 1/2 in. stem, in a drill hole in a concrete base, flush with the ground, with top mkd.</p>
	<p>T13N R5E</p> <p>1/4</p> <p>S14 S13</p> <p>1973</p>

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Raise a mound of stone, 4 ft. base, 2 ft. high, W of the cor.</p> <p>The cor. is in a fence, bearing N. 86° E. and S. 86° W., adjacent to a brace in same fence.</p> <p>Reset local pipe alongside brass tablet.</p> <hr/> <p>N. 2°51' E., beginning new measurement.</p>
1.90	Graded gravel road, bears E and W.
10.90	Descend to Clear Creek bottom.
11.50	Bottom of descent, thence over creek bottom, through medium timber.
17.00	Clear Creek, 30 lks. wide, course NW.
24.00	Power line, bears E and W.
31.40	Wash, 10 lks. wide, with 5 ft. banks, drains W.
34.00	Power line, bears N. 70° E. and S. 70° W.
34.40	Paved road, bears S. 30° W. and northerly, thence along same road.
39.95	Junction of asphalt roads; roads extend E, S and W.
41.97	<p>The cor. of secs. 11, 12, 13 and 14, monumented with a basalt stone, firmly set in concrete 4 x 8 x 6 ins., projecting above ground, mkd. with 1 notch on the E and 4 notches on the S edges; not remonumented.</p> <p>The cor. is located in a fence cor.; fences extend northerly and easterly.</p> <p>Land, gently rolling. Soil, clay loam and rocky. Timber, cottonwood, willows and pecan. Undergrowth, mesquite, catclaw and cacti.</p> <hr/> <p>S. 89°12' E., bet. secs. 12 and 13.</p> <p>Over open level land.</p> <p>Along an E and W fence.</p>
16.80	Fence, projects N. 5° W.
17.00	Concrete irrigation ditch, 6 lks. wide, 1 1/2 ft. deep, flows N. 5° W.
19.95	Fence, projects N.
20.49	Pt. for the W 1/16 sec. cor. of sec. 12, only, based on the official record of the 1962 supplemental plat of sec. 12; not monumented.
22.20	Fence, projects N.

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS		
23.60	Fence, projects N.	
25.90	Fence, projects N.	
26.30	Irrigation ditch, 4 lks. wide, 1 1/2 ft. deep, flows S.	
28.40	Forest Highway No. 9, asphalt surfaced, bears S. 25° E. and N. 25° W.	
35.60	Fence, projects N. 5° W.; enter rolling land, bears N and S, through scattering to medium undergrowth.	
40.48	The 1/4 sec. cor. of secs. 12 and 13, monumented with a granite stone, 20 x 11 x 4 ins., firmly set 16 ins. in the ground, mkd. 1/4 on the W face, with a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, N of the cor.	
	At the cor. point	
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.	
	T13N R5E $\frac{1}{4} \frac{S12}{S13}$ 1973	
	Raise a mound of stone, 4 ft. base, 2 ft. high, N of the cor.	
	Deposit the mkd. stone alongside the iron post.	
	The cor. is located 3.5 lks. S of an E and W fence.	
	<hr style="width: 20%; margin: auto;"/> N. 88°05' E., beginning new measurement.	
	Continuing along fence bearing E and W.	
.70	Ridge, bears N and S.	
5.50	Draw, drains S. 15° W.	
6.10	Spur, slopes S.	
6.90	Draw, drains S. 30° W.	
18.69	Pt. for the E 1/16 sec. cor. of sec. 13 only.	
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.	
	T13N R5E <hr style="width: 20%; margin: auto;"/> E 1/16 S13 1974	
	from which	
	A cedar, 5 ins. diam., bears N. 78° W., 104 lks. dist., mkd. S12 BT.	
	The cor. is 1 lk. N of an E and W fence.	

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
19.60	Fence cor.; fences extend N. 55° E. and westerly.
37.38	<p>True pt. for the cor. of secs. 12 and 13 only, on the E. bdy. of the Tp., heretofore described.</p> <p>Land, E 35.00 chs., level; remainder, rolling. Soil, E 35.00 chs., clay loam; remainder, rocky. Timber, scattering cedar and palo verde. Undergrowth, creosote bush, mesquite, catclaw and cacti. in East ½ mile; remainder is pasture.</p>
	From the cor. of secs. 11, 12, 13 and 14.
	N. 0°07' E., bet. secs. 11 and 12.
	Over open level land.
	Along a N and S fence.
1.50	S end of power line, projects northerly, thence along power line.
5.10	Power line, bears E and W.
5.30	Fence, projects S. 80° E.
18.10	S edge of corrals, bears E and W.; Power line, projects N. 70° E. to a house.
19.40	N edge of corrals, bears E and W.
20.00	Pt. for the S 1/16 sec. cor. of secs. 11 and 12; not monumented.
20.10	Bend in power line; lines extend southerly along the sec. line, and N. 65° W.
21.60	Fence, bears S. 65° E. and N. 65° W.
22.30	Forest Highway No. 9, asphalt surfaced, bears S. 65° E. and N. 65° W., thence through medium to dense undergrowth, bears E and W.
23.50	Wash, 25 lks. wide, with 16 ft. walls, drains N. 55° W.
24.40	Wash, 45 lks. wide, with 20 ft. walls, drains S. 65° W.
26.60	Track road, bears N. 80° E. and S. 80° W.
29.33	Pt. for the SW cor., lot 19, sec. 12; not monumented.
30.60	Track road, bears N. 70° E. and S. 70° W.
30.90	Power line, bears N. 75° E. and S. 75° W.
32.60	Track road, bears N. 40° E. and S. 40° W.
33.97	The closing cor. of secs. 11 and 12, on line 3-4 of the abandoned Fort Verde Garden Reservation, heretofore described.

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From this point, the closing cor. of secs. 1 and 12 for inside the abandoned Fort Verde Garden Reservation, bears N. 54°53' E., 80.01 chs. dist., heretofore described.</p> <hr/> <p>North, beginning new measurement.</p>
5.10	Track road, bears N. 30° E. and S. 30° W.
6.03	The ¼ sec. cor. of secs. 11 and 12, monumented with a limestone, firmly set, 3 x 8 x 12 ins. above ground, mkd. ¼ on the E face, with a mound of stone, 2 ft. base, 6 ins. high, W of the cor.; not remonumented.
	<hr/> <p>N. 0°23' W., beginning new measurement.</p>
1.90	Track road, bears N. 80° E. and S. 80° W.
3.20	Enter gypsum mining area, bears E and W.
5.90	Power line, bears S. 55° E. and N. 55° W.
9.96	Pt. for the S-N 1/64 sec. cor. of secs. 11 and 12, falls in a congested mining area; not monumented.
15.00	N edge of gypsum mining area, bears NE and SW, enter broken rolling land.
19.92	<p>Pt. for the N 1/16 sec. cor. of secs. 11 and 12.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T13N R5E N 1/16 S11 S12 1974</p> </div> <p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, W of the cor.</p>
25.00	Enter gently rolling excavated land, bears NE and SW.
39.79	Track road, bears N. 55° E. and S. 55° W.
39.84	<p>Pt. for the cor. of secs. 1, 2, 11 and 12, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T13N R5E S 2 S 1 S11 S12 1973</p> </div> <p>Raise a mound of stone, 2 ft. base, 1 ft. high, W of the cor.</p>

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS

The cor. is located on the N edge of a track road.

Land, varies from level to broken and rolling.
Soil, clay loam in south 25.00 chs.; remainder, gypsum
area.

Undergrowth, creosote in northern portion; no timber.

N. 89°13' E., bet. secs. 1 and 12.

Over gently rolling land, through scattering undergrowth.

- .07 Track road, bears N. 55° E. and S. 55° W.
 - 17.00 Descend steep E slope.
 - 19.50 Base of E slope, bears NE and SW.
 - 19.58 Pt. for the W 1/16 sec. cor. of secs. 1 and 12.
- Set an iron post, 28 ins. long, 2½ ins. diam., 23 ins. in
the ground, with brass cap mkd.

T13N R5E
W 1/16 $\frac{S 1}{S12}$
1973

from which

A palo verde, 4 ins. diam., bears N. 68° E.,
165 lks. dist., mkd. with an X at breast
height and BT at the base.

A palo verde, 4 ins. diam., bears S. 21° E.,
140 lks. dist., mkd. with an X at breast
height and BT at the base.

A steel fence post, bears S. 3°30' E., 51.3 lks.
dist.

- 35.40 Track road, bears S. 30° E. and N. 30° W.
- 35.90 Wash, 10 lks. wide, with 5 ft. banks, drains S. 30° E.
- 39.16 The ¼ sec. cor. of secs. 1 and 12, monumented with a 4 x
4 in. wooden post, 3½ ft. long, firmly set in a mound of
stone, 2½ ft. base, 1 ft. high, post mkd. NW TROY. A
location notice is at the base of the post, dated 1962,
designating this claim cor. as the ¼ sec. cor. of secs. 1
and 12. Accept this position as the best available evi-
dence of the original cor. position.

At the cor. pt.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in
the ground, with brass cap mkd.

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
	<p>T13N R5E $\frac{1}{4}$ $\frac{S 1}{S12}$ 1973</p>
	<p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, N of the cor.</p> <p>Reset the 4 x 4 in. post, alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89°07' E., beginning new measurement.</p> <p>Over gently rolling land, ascending SW slope.</p>
2.30	Top of ascent, thence across low limestone mesa, edge bears SE and NW.
4.60	Descend 15 ft. bluff, bears NE and SW.
5.50	Bottom of descent.
20.745	Pt. for the E 1/16 sec. cor. of sec. 1 only, at proportionate dist.; not monumented.
25.40	Track road, bears N. 25° E. and S. 25° W.
26.605	<p>The closing cor. of secs. 1 and 12, on line 3-4 of the abandoned Fort Verde Garden Reservation, heretofore described. This cor. functions for inside the reservation only.</p> <p>From this point the closing cor. of secs. 1 and 12 for outside the abandoned Fort Verde Garden Reservation, bears N. 55°03' E., 1.47 chs. dist., heretofore described.</p>
	<p>From the true pt. for the cor. of secs. 1 and 12 only, on the E. bdy. of the Tp., heretofore described.</p> <p>West, bet. secs. 1 and 12.</p> <p>Over rolling land, through medium undergrowth.</p>
4.30	Gully, 40 lks. wide, with 7 ft. walls, drains SW.
10.45	Wash, 30 lks. wide, 2 ft. deep, drains S. 25° W.
10.91	<p>The closing cor. of secs. 1 and 12, on line 3-4 of the abandoned Fort Verde Garden Reservation, heretofore described. This cor. functions for outside the reservation only.</p> <p>From this point, the closing cor. of secs. 1 and 6 on the E. bdy. of the Tp., for outside the abandoned Fort Verde Garden Reservation, bears N. 55°03' E., 13.28 chs. dist., heretofore described.</p>
	<p>From the cor. of secs. 1, 2, 11 and 12, heretofore described.</p> <p>N. 0°59' E., bet. secs. 1 and 2.</p>

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
	Over excavated land.
9.80	Fence, bears E and W, 136 lks. dist., to a fence cor.; fences extend N. 10° E., S. 10° W., and East. N edge of excavated area, bears E and W, thence through medium to dense undergrowth.
9.99	Pt. for the S-S 1/64 sec. cor. of secs. 1 and 2. Set an iron post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd. T13N R5E S-S 1/64 S 2 S 1 1974 Raise a mound of stone, 3 ft. base, 1½ ft. high, W of the cor.
14.40	Fence, bears N. 10° E. and S. 10° W.
19.98	Pt. for the S 1/16 sec. cor. of secs. 1 and 2; not monumented.
33.40	Gully, 10 lks. wide, with 8 ft. walls, drains S. 55° W.
35.50	Wash, 5 lks. wide, 3 ft. deep, drains SW.
39.96	The ¼ sec. cor. of secs. 1 and 2, monumented with a limestone, 18 x 10 x 10 ins., firmly set 10 ins. in the ground, mkd. ¼ on the W face, with a mound of stone, 3 ft. base, 18 ins. high, W. At. the cor. pt. Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T13N R5E ¼ S 2 S 1 1973 from which The NE cor. of Egyptian King No. 1, identical with the SE cor. of Egyptian King No. 2, bears N. 40°15' W., 42.7 lks. dist., monumented with a wood post, 2 ins. diam., projecting 3 ft. above ground. Rebuild the mound of stone, 3 ft. base, 1 ft. high, W. of the cor. Deposit the mkd. stone alongside the iron post. N. 0°21' E., beginning new measurement.
8.10	Wash, 15 lks. wide, 4 ft. deep, drains W.

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
10.40	Wash, 40 lks. wide, with 12 ft. walls, drains S. 50° W.
15.60	Ascend S slope.
19.70	Pt. for the N 1/16 sec. cor. of secs. 1 and 2, at proportionate dist.; not monumented.
27.10	Spur, slopes S. 20° W.
28.10	Draw, drains S. 15° W.
31.20	Ridge, bears S. 50° E. and N. 50° W.
39.35	Intersect the N. bdy. of the Tp., at the cor. of secs. 1 and 2 only; heretofore described.
	<p>Land, rolling and mountainous. Soil, gypsum in the South ½ mile; sandy loam and rocky in North ½. Undergrowth, creosote bush, palo verde, mesquite and cat-claw. Timber, thinly scattered juniper.</p>
	<p>From the cor. of secs. 26, 27, 34 and 35, monumented with an iron post, 2 ins. diam., projecting 14 ins. above ground, with brass cap mkd. as described in the official record of the 1923 resurvey of part of the subdivisional lines of T. 13 N., R. 5E.</p>
	<p>from which</p>
	<p>A partially rotted stump, 6 ins. diam., projecting 4 ins. above ground, bears N. 54°15'W., 58 lks. dist., no marks visible.</p>
	<p>A fence cor., bears S. 32° E., 3.3 lks. dist.; fences extend northerly, southerly and N. 70° W.</p>
	<p>A mound of stone, 2½ ft. base, 1½ ft. high, is W of the cor.</p>
	<p>The cor. is located 20 lks. N of a track road, bearing N. 70° E. and S. 70° W.</p>
	<p>N. 1°58' E., bet. secs. 26 and 27.</p>
	<p>Over river bottom land, through scattering timber and undergrowth.</p>
10.80	Present right bank of the Verde River, 2 ft. high, bears N. 60° E. and S. 60° W.
12.70	Present left bank of the Verde River, 3 ft. high, bears N. 50° E. and S. 50° W.
15.00	Enter rolling land, bears E and W.
39.36	The ¼ sec. cor. of secs. 26 and 27, at intersection of abandoned fences extending easterly, southerly and westerly. This position is harmoniously related to existing survey cors. in the area, and is accepted as the best available evidence of the original cor. position.

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS

At the cor. pt.

Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground and in a collar of stone, 3 ft. base to top, with brass cap mkd.

T13N R5E
¼
S27 | S26
1974

from which

A juniper, 4 ins. diam., bears S. 8° E., 13 lks. dist., mkd. ¼ S26 BT.

Cor. is set at the W edge of a fence post, 5 ins. diam., projecting 3 ft. above ground.

N. 2°08' E., beginning new measurement.

Ascending S-SW slope.

- 1.60 Fence, bears N. 85° W. and S. 85° E., 140 lks. dist., thence southerly.
- 1.70 Top of ascent, thence over gently rolling open land.
- 21.10 Track road, bears SE and NW.
- 39.37 The cor. of secs. 22, 23, 26 and 27, monumented with an iron post, 2 ins. diam., projecting 18 ins. above ground, in a mound of stone, 3 ft. base, 6 ins. high, with brass cap mkd. as described in the official record of the 1923 resurvey of part of the subdivisional lines of T. 13 N., R. 5 E.

Land, rolling to gently rolling.
Soil, clay loam and rocky.
Timber, cottonwood along river bottom; remainder, thinly scattered juniper.
Undergrowth, scattered mesquite, palo verde and cacti.

N. 0°52' E., bet. secs. 22 and 23.

Over rolling land, through scattered undergrowth.

- 40.33 The ¼ sec. cor. of secs. 22 and 23, monumented with a mound of stone, 2½ ft. base, 1 ft. high. This position is harmoniously related to existing survey cors. in the area and is accepted as the best available evidence of the original cor. position.

At the cor. pt.

Set an iron post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.

T13N R5E
¼
S22 | S23
1974

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Raise a mound of stone, 2 ft. base, 2 ft. high, W of the cor.</p>
	<p>N. 0°53' E., beginning new measurement.</p>
	<p>Over gently rolling land, through scattering patches of undergrowth.</p>
40.15	<p>The cor. of secs. 14, 15, 22 and 23, monumented with an iron post, 2½ ins. diam., projecting 8 ins. above ground, with brass cap mkd. as described in the official record of the 1964 remonumentation of cadastral survey cors., T. 13 N., R. 5 E.</p>
	<p>A mound of stone, 4 ft. base, 1 ft. high, is W of the cor.</p>
	<p>Land, gently rolling. Soil, clay loam and rocky. Undergrowth, catclaw, palo verde and cacti; no timber.</p>
	<p>From the cor. of secs. 13, 14, 23 and 24.</p>
	<p>N. 89°17' W., bet. secs. 14 and 23.</p>
	<p>Over gently rolling land, through medium undergrowth.</p>
20.70	<p>Unimproved dirt road, bears N. 35° E. and S. 35° W., to a stock pond. Center of dry stock pond, 2.00 chs. diam., bears South, 3.00 chs. dist.</p>
40.42	<p>The ¼ sec. cor. of secs. 14 and 23, monumented with a basalt stone, 9 x 22 x 5 ins., mkd. ¼ on the N face, firmly set in a mound of stone, 3 ft. base, 1 ft. high.</p>
	<p>At the cor. pt.</p>
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T13N R5E ¼ $\frac{S14}{S23}$ 1974</p>
	<p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, N of the cor.</p>
	<p>Deposit the mkd. stone alongside the iron post.</p>
	<p>The cor. is located on a low spur, slopes N.</p>
	<p>N. 89°46' W., beginning new measurement.</p>
20.185	<p>Point for the W 1/16 sec. cor. of secs. 14 and 23; not monumented.</p>
40.37	<p>The cor. of secs. 14, 15, 22 and 23.</p>
	<p>Land, gently rolling. Soil, clay loam and rocky. Undergrowth, catclaw, mesquite and cacti; no timber.</p>

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona


CHAINS	
	N. 0°19' E., bet. secs. 14 and 15.
	Over gently rolling land, through medium undergrowth.
19.94	Pt. for the S 1/16 sec. cor. of secs. 14 and 15; not monumented.
23.00	Graded gravel road, bears N. 15° E. and southerly.
28.80	Unimproved dirt road, bears S. 75° E. and N. 75° W.
39.48	Fence, partially abandoned, bears E and W.
39.88	The 1/4 sec. cor. of secs. 14 and 15, monumented with a local hollow metal pipe, 2 ins. diam., 43 ins. long, projecting 33 ins. above ground. This position is harmoniously related to existing survey cors. in the immediate area and is accepted as the best available evidence of the original cor. position.
	At the cor. pt.
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, and in a mound of stone, 3 1/2 ft. base to top, with brass cap mkd.
	T13N R5E 1/4 S15 S14 1974
	Reset the local pipe alongside the iron post.
	The cor. is located in an E and W fence.

	N. 0°21' W., beginning new measurement.
	Over nearly level land, through light to medium undergrowth.
.40	Graded gravel road, bears E and W.
4.20	Graded gravel road, bears E and W.
10.70	Enter walnut and elm timber, bears N. 75° E. and S. 75° W.
11.30	Enter open grassland, bears N. 75° E. and S. 75° W.
11.40	Irrigation ditch, bears N. 75° E. and S. 75° W.; not in use.
15.20	Bladed dirt road, bears N, E and W, about 3.00 chs. dist., curving northerly; thence along road.
19.075	Pt. for the closing cor. of secs. 14 and 15, at proportionate dist., based on the official 1888 survey plat, is in a bladed dirt road; there is no remaining evidence of the original cor.

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS

Set an iron post, 15 ins. long, 2½ ins. diam., 27 ins. in the ground, with brass cap mkd.



from which

An iron post, 28 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 12°55' E., 201.7 lks. dist., mkd. T13N R5E S14 CC RM 133.1 FT. 1974 and an arrow pointing to the cor.

A power pole, bears N. 46°30' E., 371.5 lks. dist., with aluminum markings of PSI 78246.

From this pt., the point for Cor. No. 4 of the abandoned Fort Verde Garden Reservation, bears S. 55°52' W., 24.31 chs. dist., heretofore described.

Cor. is 5 lks. W of the E edge of a bladed dirt road, bears N and S.

- 20.08 Pt. for the N 1/16 sec. cor. of secs. 14 and 15; not monumented.
- 20.60 Enter medium timber and undergrowth, bears E and W.
- 20.80 Bladed dirt road, in a curve, bears S and W.
- 21.30 Enter wash area, bears E and W.
- 23.10 Clear Creek, 20 lks. wide, with 4 ft. banks, course W.
- 27.40 Power line, bears S. 25° E. and N. 25° W.
- 31.50 N edge of wash area, bears N. 40° E. and S. 40° W., thence through scattering undergrowth.
- 35.50 Gully, 30 lks. wide, 6 ft. deep, drains E.
- 36.60 Power line, bears N. 50° E. and S. 50° W., 44 lks. dist., thence S. 65° W.
- 40.16 The cor. of secs. 10, 11, 14 and 15, monumented with an iron post, 2½ ins. diam., projecting 6 ins. above ground, with brass cap mkd. as described in the official record of the 1964 remonumentation of cadastral survey cors., T. 13 N., R. 5 E. A mound of stone, 3 ft. base, 1 ft. high, is W of the cor.

The cor. is located at a fence cor.; fences extend S. 65° E. and W.

From this pt., a Coast and Geodetic Bench Mark, bears N. 6°57' E., 5.589 chs. dist., monumented with a 3 in. brass tablet set in a concrete form, 9 ins. square, projecting 10 ins. above ground, with tablet mkd. Elev. 3149.305 Feet R30 1933.

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.
Gila and Salt River Meridian, Arizona

CHAINS

Land, nearly level.
Soil, clay loam and rocky.
Timber, cottonwood, elm and walnut.
Undergrowth, catclaw, mesquite and cacti.

East, on record bearing, bet. secs. 11 and 14.

Over gently rolling land, through scattering undergrowth.

3.50 Enter medium timber and dense undergrowth.

4.10 Power line, bears N. 50° E. and S. 50° W.

19.895 Pt. for the W 1/16 sec. cor. of secs. 11 and 14, at proportionate dist., based on the official 1888 survey plat.

Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

T13N R5E
W 1/16 $\frac{S11}{S14}$
1974

from which

A hackberry, 16 ins. diam., bears N. 21° E.,
74 lks. dist., mkd. W 1/16 S11 BT.

Raise a mound of stone, 2½ ft. base, 1 ft. high, N of the cor.

31.235 Point for the closing cor. of secs. 11 and 14, at intersection with line 3-4 of the abandoned Fort Verde Garden Reservation, as established in 1887 by Clarence H. Wallace, Deputy Surveyor.

Set an iron post, 28 ins. long, 2½ ins. diam., 12 ins. in the ground and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T13N
CC $\frac{S11}{S14}$ /
R5E /
1974

This cor. functions for inside the reservation only.

From this pt., the closing cor. of secs. 14 and 15 on line 3-4 of the abandoned Fort Verde Garden Reservation, bears S. 55°52' W., 37.575 chs. dist., heretofore described.

From the cor. of secs. 11, 12, 13 and 14.

S. 89°50' W., bet. secs. 11 and 14.

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
	Over nearly level to gently rolling land, through scattering timber and undergrowth.
2.00	Asphalt road, bears N and S.
5.00	E edge of reservoir, bears S. 45° E., 6.70 chs. dist. and N. 45° W., 1.10 chs. dist.
6.80	W edge of reservoir, bears S. 15° E. and N. 15° W.
6.90	Enter dense undergrowth, bears S. 25° E. and N. 25° W.
8.00	Enter open land, bears S. 25° E. and N. 25° W.
11.20	Asphalt road, bears S. 30° E. and N. 30° W.
15.70	Asphalt road, bears N and S.
19.50	Asphalt road, bears N and S.
19.90	Power line, bears N and S.
22.60	Wash, 20 lks. wide, 1 ft. deep, drains S. 10° W.
29.00	Enter medium timber and undergrowth, bears N and S.
41.20	Asphalt road, bears N and S.
41.50	Power line, bears N and S.
41.57	Point for the ¼ sec. cor. of secs. 11 and 14, at proportionate dist., based on the official 1873 survey plat; there is no remaining evidence of the original cor. Not monumented.
50.28	Point for the closing cor. of secs. 11 and 14, on line 3-4 of the abandoned Fort Verde Garden Reservation, heretofore described. This pt. functions for outside the reservation only. From this point, the closing cor. of secs. 11 and 14, for inside the abandoned Fort Verde Garden Reservation, bears S. 55°52' W., 1.775 chs. dist., heretofore described. Land, nearly level to gently rolling. Soil, clay loam. Timber, cottonwood and hackberry. Undergrowth, mesquite, catclaw and cacti.
	From the cor. of secs. 10, 11, 14 and 15. N. 0°18' E., bet. secs. 10 and 11. Over gently rolling land, through medium undergrowth.
10.90	Forest Highway No. 9, asphalt surfaced, bears N. 80° E. and S. 80° W.
13.80	Graded dirt road, bears N. 80° E. and S. 80° W.
15.00	Ascend over rolling land, bears S. 80° E. and N. 80° W.

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS									
19.30	Ridge, bears S. 70° E. and N. 70° W.								
19.89	Pt. for the S 1/16 sec. cor. of secs. 10 and 11; not monumented.								
33.70	Top of ascent, slopes W.								
39.78	The 1/4 sec. cor. of secs. 10 and 11, monumented with an iron post, 2 1/2 ins. diam., set in a mound of stone, 3 ft. base, 16 ins. high, to top of iron post, with brass cap mkd. as described in the official record of the 1964 re-monumentation of cadastral survey cors. of T. 13 N., R. 5 E.								
	N. 2°09' E., beginning new measurement.								
5.70	Saddle in ridge, bears E and W.								
20.50	Fence, bears N. 5° E. and S. 5° W.								
25.20	Draw, drains S. 65° W.								
30.60	Spur, slopes S. 40° W.								
34.80	Draw, drains N. 75° W.								
36.10	Fence, bears S. 70° E. and N. 70° W.								
40.30	Wash, 30 lks. wide, with 8 ft. walls, drains westerly.								
40.57	Pt. for the cor. of secs. 2, 3, 10 and 11, at proportionate dist.; there is no remaining evidence of the original cor.								
	Set an iron post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd.								
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td colspan="2">T13N R5E</td> </tr> <tr> <td>S 3</td> <td>S 2</td> </tr> <tr> <td>S10</td> <td>S11</td> </tr> <tr> <td colspan="2">1973</td> </tr> </table>	T13N R5E		S 3	S 2	S10	S11	1973	
T13N R5E									
S 3	S 2								
S10	S11								
1973									
	Raise a mound of stone, 3 ft. base, 2 ft. high, W of the cor.								
	<p>Land, rolling. Soil, clay loam and rocky. Undergrowth, creosote bush, mesquite, palo verde and cacti; no timber.</p>								
	From the cor. of secs. 1, 2, 11 and 12.								
	S. 89°27' W., bet. secs. 2 and 11.								
	Over gently rolling excavated land.								
2.73	A fence cor., bears North 22 lks. dist.; fences extend N. 10° E. and N. 89°48' W., thence along S side of fence.								
15.70	Track road, bears S. 30° E. and N. 30° W.								

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
19.57	Fence, bears S and N, 44 lks. dist., to a fence cor.; fences extend S. 89°48' E. and South. West edge of excavated land, bears N and S, thence through medium undergrowth.
19.605	Pt. for the E 1/16 sec. cor. of secs. 2 and 11; not monumented.
32.30	Wash, 5 lks. wide, 1 ft. deep, drains N. 65° E.
33.70	Ascend over rolling land, bears SE and NW.
39.21	The ¼ sec. cor. of secs. 2 and 11, monumented with a steel fence post, projecting 4 ft. above ground, with a mound of stone, 3 ft. base, 3 ft. high, W. A location notice dated October 19, 1961, at the base of the post, designates this position as the ¼ sec. cor. of secs. 2 and 11. This position is harmoniously related to existing original corners in the immediate area and is accepted as the best available evidence of the original cor. position.
	At the cor. pt.
	Set an iron post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.
	T13N R5E ¼ $\frac{S\ 2}{S11}$ 1974
	Raise a mound of stone, 3 ft. base, 2 ft. high, N of the cor.
	Reset the fence post alongside the iron post.
	S. 89°41' W., beginning new measurement.
	Ascending over E slope.
4.30	Top of ascent, edge bears SE and NW.
11.00	Descent West slope.
17.80	Draw, drains N. 15° W.
19.20	Small spur, slopes N. 15° W.
20.70	Draw, drains N. 25° W.; bottom of descent, continue over rolling land.
31.80	Wash, 20 lks. wide, with 15 ft. walls, drains NW.
41.83	The cor. of secs. 2, 3, 10 and 11.
	Land, rolling. Soil, clay loam with limestone outcroppings. Timber, juniper. Undergrowth, creosote bush, palo verde and cacti.
	N. 2°58' E., bet. secs. 2 and 3.

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
	Over rolling broken land, through medium undergrowth.
20.00	Wickiup Creek, 50 lks. wide, with 12 ft. walls, drains SW.
39.80	Fence, bears N. 50° E. and S. 50° W.
40.58	<p>The ¼ sec. cor. of secs. 2 and 3, monumented with a limestone, firmly set, 8 x 3 x 8 ins. above ground, mkd. ¼ on W face; not remonumented.</p> <p>Raise a mound of stone, 2 ft. base, 1½ ft. high, W of the cor.</p> <p>This cor. functions for inside the Fort Verde Garden Reservation only.</p> <hr/> <p>N. 1°55' E., beginning new measurement.</p>
4.38	<p>The closing cor. of secs. 2 and 3, on line 1-2 of the Fort Verde Garden Reservation, monumented with a limestone firmly set, 36 x 24 x 12 ins. above ground, with a mound of stone, 3 ft. base, 1½ ft. high, S of the cor. There are no visible markings on the cor. monument; not remonumented.</p> <p>This cor. functions for inside the reservation only.</p> <p>From this pt., the closing cor. of secs. 2 and 3, for outside the reservation, bears S. 56°40' W., 3.82 chs. dist., monumented with an iron post, 2 ins. diam., projecting 10 ins. above ground, with brass cap mkd. as described in the official record of the 1916 survey of a portion of the subdivision of T. 13 N., R. 5 E.</p> <p>Land, gently rolling. Soil, clay loam. Undergrowth, creosote brush, mesquite and cacti; no timber.</p>
	<p>From the ¼ sec. cor. of secs. 33 and 34, monumented with an iron post, 1 in. diam., projecting 12 ins. above ground, with brass cap mkd. as described in the official record of the 1923 resurvey of part of the subdivisional lines of T. 13 N., R. 5 E.</p> <p>N. 5°09' W., bet. secs. 33 and 34.</p> <p>Over rolling land, through scattering timber and medium undergrowth.</p>
9.10	Fence cor.; fences extend E, W and N. 5°09' W., thence along fence.
16.70	Fence cor.; fences extend E and S. 5°09' E. Bend in a power line; lines extend E and N. 5°09' W., thence along power line.
20.82	Pt. for the N 1/16 sec. cor. of secs. 33 and 34, is on the W edge of a graded dirt road, bearing N and S.

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 42 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T13N R5E N 1/16 S33 S34 1974</p> <p>from which</p> <p style="padding-left: 40px;">An iron post, 28 ins. long, 2½ ins. diam., set 24 ins. in the ground for a reference monument, bears S. 18°20' W., 40 lks. dist., with brass cap mkd. T13N R5E N 1/16 S33 RM 26.4 Ft. 1974 and an arrow pointing to the cor.</p> <p style="padding-left: 40px;">A mesquite, 6 ins. diam., bears N. 18°20' W., 40 lks. dist., mkd. T13N R5E N 1/16 S33 BT.</p>
21.98	Fence cor.; fences extend E and N. 5°09' W., thence along fence.
41.30	Wash, 30 lks. wide, 2 ft. deep, drains E.
41.64	True pt. for the cor. of secs. 27, 28, 33 and 34.
	<p>From this pt., the witness cor. of secs. 27, 28, 33 and 34, bears North, 30 lks. dist., (record) monumented with an iron post, 2 ins. diam., projecting 6 ins. above ground, with brass cap mkd. as described in the official record of the 1923 resurvey of part of the subdivisional lines of T. 13 N., R. 5 E.</p> <p>Add 1974 and an arrow pointing to the true pt., to the brass cap.</p> <p>Land, nearly level to gently rolling. Soil, clay loam and rocky. Undergrowth, mesquite, catclaw, and cacti. Timber, juniper.</p>
	N. 3°54' E., bet. secs. 27 and 28.
	Over gently rolling land, through scattering timber and undergrowth.
20.10	Graded gravel road, bears E and W.
20.50	Power line, bears E and W.
20.60	Fence cor., bears West, 42 lks. dist.; fences extend N and W.
24.20	Fence, bears E and W.
29.10	Fence, bears E and W. Enter open pasture, bears E and W.
34.00	Enter medium timber and undergrowth.

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

	CHAINS	
40.81		<p>The ¼ sec. cor. of secs. 27 and 28, monumented with a local re-bar, ½ in. diam., 14 ins. long, projecting 4 ins. above ground. This position is located in a fence cor.; fences extend easterly and westerly, and an old abandoned fence extends northerly, is harmoniously related to existing survey cors. in the immediate area and is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. pt.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T13N R5E ¼ S28 S27 1974</p> <p>from which</p> <p style="text-align: center;">A mesquite, 7 ins. diam., bears N. 29° E., 99.5 lks. dist., mkd. ¼ S27 BT.</p> <p>Reset the re-bar alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 1°28' E., beginning new measurement.</p> <p>Along abandoned fence.</p>
15.20		<p>Power line, bears S. 35° E. and N. 35° W.</p>
20.405		<p>Pt. for the N 1/16 sec. cor. of secs. 27 and 28.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T13N R5E N 1/16 S28 S27 1974</p> <p>from which</p> <p style="text-align: center;">A cottonwood, 30 ins. diam., bears S. 87° E., 94 lks. dist., mkd. N 1/16 S27 BT.</p> <p>Buried a metal toy car, 36 ins. long, 10 ins. wide, and 15 ins. high, with the iron post protruding through the opening for the driver.</p>
23.40		<p>Fence cor. bears East, 13 lks. dist.; fences extend northerly and S. 60° E., thence along W side of fence.</p>
24.70		<p>Fence, bears S. 70° W. and N. 70° E., 20 lks. dist., to a fence cor.; fences extend northerly, southerly and S. 70° W., thence along N and S fence.</p>
40.81		<p>The cor. of secs. 21, 22, 27 and 28, monumented with a local open end metal pipe, 1 in. diam., projecting 2 ins. above ground. This position is harmoniously related to existing survey cors. in the area and is accepted as the best available evidence of the original cor. position; not remonumented.</p>

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A steel fence post is set alongside the cor.</p> <p>The cor. is located S. 14° E., 3 lks. dist., from a fence cor.; fences extend southerly and westerly.</p> <p>Land, nearly level to gently rolling. Soil, clay loam. Timber, cottonwood and mesquite. Undergrowth, catclaw.</p>
	<p>From the cor. of secs. 22, 23, 26 and 27.</p> <p>N. 89°14' W., bet. secs. 22 and 27.</p> <p>Over rolling land, through scattering timber and medium undergrowth.</p>
24.10	<p>Graded dirt road, bears N. 40° E. and S. 40° W.</p>
38.53	<p>The ¼ sec. cor. of secs. 22 and 27, monumented with a local open end metal pipe, 18 ins. long, 1 in. diam., set in a mound of stone, 2 ft. base, 16 ins. high. This position is harmoniously related to existing survey cors. in the area and is accepted as the best available evidence of the original cor. position.</p>
	<p>At the cor. pt.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T13N R5E ¼ $\frac{S22}{S27}$ 1974</p>
	<p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, N of the cor.</p>
	<p>Reset the local pipe alongside the iron post.</p>
	<p>N. 89°17' W., beginning new measurement.</p>
2.50	<p>Draw, drains S. 50° W.</p>
17.30	<p>Spur, slopes S, descend steep W slope.</p>
19.235	<p>Pt. selected for the witness W 1/16 sec. cor. of secs. 22 and 27.</p>
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, mound of stone, 4 ft. base to top, with brass cap mkd.</p>
	<p style="text-align: center;">W C T13N R5E W 1/16 ← $\frac{S22}{S27}$ 1974</p>
	<p>The cor. is located on a steep W slope, 20 lks. E. of a vertical limestone cliff about 90 ft. high.</p>

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
19.90	Present left bank of the Verde River, a vertical cliff, approximately 50 ft. high, bears N and S.
22.335	True pt. for the W 1/16 sec. cor. of secs. 22 and 27 is in the Verde River.
22.80	Present right bank of the Verde River, 2 to 6 ft. high, bears N and S, thence over gently rolling land subject to overflow.
24.80	Fence, bears S. 5° E. and N. 5° W., 20 lks. dist., thence N. 35° W. West edge of overflow area.
37.40	Fence, bears irregularly N and S.
44.67	The cor. of secs. 21, 22, 27 and 28.
	Land, rolling to gently rolling. Soil, E 3/4 mile, clay loam and rocky; remainder, sandy loam. Timber, juniper and cottonwood. Undergrowth, creosote bush, mesquite and cacti.
	N. 2°48' E., bet. secs. 21 and 22.
	Over nearly level land, through scattering timber and undergrowth.
.03	Fence cor., bears West, 1 lk. dist.; fences extend southerly and westerly.
20.00	Present right bank of the Verde River, 3 to 6 ft. high, bears S. 70° E. and N. 70° W.
25.80	Present left bank of the Verde River, 3 to 6 ft. high, bears S. 80° E. and N. 80° W.
30.30	Fence, bears easterly and westerly, thence over open land.
39.50	Concrete irrigation ditch, 5 lks. wide, 2 ft. deep, bears S. 55° E. and N. 55° W.
39.60	Fence, bears S. 55° E. and N. 55° W.; enter open pasture.
39.97	Point for the 1/4 sec. cor. of secs. 21 and 22, at proportionate dist.; there is no remaining evidence of the original cor. Not monumented.
70.70	N edge of open pasture, bears E and W, thence ascend over rolling land through dense to medium undergrowth.
71.00	Fence, bears E and W.
74.60	Top of ascent, thence over nearly level mesa.
79.80	Fence, bears N. 35° E. and S. 35° W.
79.94	The cor. of secs. 15, 16, 21 and 22, monumented with an iron post, 2 1/2 ins. diam., projecting 12 ins. above ground, with brass cap mkd. as described in the official record of the 1964 remonumentation of cadastral survey cors. of T. 13 N., R. 5 E.

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
	<p>from which</p> <p style="padding-left: 40px;">A fence cor., bears S. 60° E., 8 lks. dist.; fences extend northerly, easterly and S. 35° W.</p> <p>A mound of stone, 4 ft. base, 2 ft. high, is W of the cor.</p> <p>Land, nearly level to rolling. Soil, clay loam; West 9.00 chs. is rocky. Timber, cottonwood along the river. Undergrowth, mesquite, catclaw and cacti.</p> <hr/> <p>From the cor. of secs. 14, 15, 22 and 23.</p> <p>N. 89°40' W., bet. secs. 15 and 22.</p> <p>Over nearly level land, through scattering undergrowth.</p> <p>.95 Graded gravel road, bears N. 10° E. and S. 10° W.</p> <p>9.90 Unimproved dirt road, bears SE and NW.</p> <p>20.095 Intersect a mound of stone, 2½ ft. base, 10 ins. high.</p> <p>40.27 The ¼ sec. cor. of secs. 15 and 22, monumented with a local open end metal pipe, 1 in. diam., 18 ins. long, projecting 6 ins. above ground, with a mound of stone, 3 ft. base, 1 ft. high, N. A location notice of the Billy H Claim, dated June, 1962, found in the mound designates this position as the cor. This position is harmoniously related to existing survey cors. in the area and is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. pt.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T13N R5E ¼ S15 S22 1974</p> <p>Rebuild the mound of stone, 2 ft. base, 1 ft. high, N of the cor.</p> <p>Reset the local pipe alongside the iron post.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 89°40' W., beginning new measurement.</p> <p>2.54 Abandoned fence, bears N. 17° E. and S. 17° W.; enter gently rolling land, bears N and S.</p> <p>13.70 Draw, drains S. 10° W.</p> <p>20.115 The W 1/16 sec. cor. of secs. 15 and 22, monumented with a local open end metal pipe, 1 in. diam., 18 ins. long, set in a mound of stone, 3 ft. base, 6 ins. high. This position is harmoniously related to existing survey cors. in the area and is accepted as the cor. position.</p> <p>At the cor. pt.</p>

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T13N R5E W 1/16 $\frac{S15}{S22}$ 1974</p> <p>from which</p> <p style="text-align: center;">A fence cor., bears N. 50° W., 8 lks. dist.; fences extend southerly and westerly.</p> <p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, N of the cor.</p> <p>Reset the local pipe alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89°40' W., beginning new measurement.</p>
.06	Fence, bears South and North, 4.5 lks. dist., to a fence cor.; fences extend southerly and westerly, thence along S side of E and W fence.
10.10	Fence, bears easterly and westerly.
20.05	Fence, bears northerly and southerly.
20.115	The cor. of secs. 15, 16, 21 and 22.
	<p>Land, nearly level to gently rolling. Soil, clay loam and rocky. Undergrowth, mesquite, catclaw and cacti; no timber.</p> <hr/> <p>N. 0°04' E., bet. secs. 15 and 16.</p> <p>Over gently rolling land, through medium undergrowth.</p> <p>Along the W side of a N and S fence.</p>
20.13	<p>The S 1/16 sec. cor. of secs. 15 and 16, monumented with a local re-bar, ¾ in. diam., projecting 3 ins. above ground, with an aluminum cap attached to top, mkd. 2007 1/16. This position is harmoniously related to existing survey cors. in the area and is accepted as the cor. position; not remonumented.</p> <p>from which</p> <p style="text-align: center;">A fence cor., bears East 5 lks. dist.; fences extend N. 5° E. and southerly.</p> <hr/> <p>N. 0°05' E., beginning new measurement.</p>
3.00	Enter creek bottom, bears NE and SW.
4.00	Irrigation ditch, flows S. 60° W.
5.90	Clear Creek, 120 lks. wide, course SW.
20.04	Fence, bears S. 60° E. and N. 60° W.

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
20.14	<p>The $\frac{1}{4}$ sec. cor. of secs. 15 and 16, monumented with a volcanic stone, 18 x 15 x 10 ins., firmly set 8 ins. in the ground, mkd. $\frac{1}{4}$ on the S face and a + on the top, with a mound of stone, 3 ft. base, 1 ft. high, NW of the cor.</p> <p>At the cor. pt.</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T13N R5E</p> <p>$\frac{1}{4}$</p> <p>S16 S15</p> <p>1974</p> </div> <p>Rebuild the mound of stone, 3 ft. base, 1 ft. high, W of the cor.</p> <p>Deposit the mkd. stone alongside the iron post.</p> <p>Cor. is located at the S edge of an alfalfa field, edge bears SE and NW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. $0^{\circ}08'$ E., beginning new measurement.</p> <p>Over irrigated alfalfa field.</p> <p>5.80 N edge of alfalfa field, bears SE and NW.</p> <p>6.10 Irrigation ditch, dry, bears SE and NW.</p> <p>6.20 Fence, bears SE and NW.</p> <p>20.80 Power line, bears S. 80° E. and N. 80° W.</p> <p>21.80 Irrigation ditch, flows W.</p> <p>25.20 Fence, bears E and W; enter medium undergrowth, bears E and W.</p> <p>28.10 Graded gravel road, bears S. 80° E. and N. 80° W.</p> <p>39.90 Fence, bears E and W.</p> <p>40.10 Graded gravel road, bears E and W.</p> <p>40.29 The cor. of secs. 9, 10, 15 and 16, monumented with an iron post, $2\frac{1}{2}$ ins. diam., projecting 6 ins. above ground, with brass cap mkd. as described in the official record of the 1964 remonumentation of cadastral survey cors. of T. 13 N., R. 5 E.</p> <p>A mound of stone, $3\frac{1}{2}$ ft. base, 1 ft. high, is W of the cor.</p> <p>Land, gently rolling. Soil, clay loam. Timber, cottonwood and hedge. Undergrowth, mesquite, catclaw and willows.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>From the cor. of secs. 10, 11, 14 and 15.</p>

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS						
	<p>N. 89°09' W., bet. secs. 10 and 15.</p> <p>Over gently rolling land, through scattering to medium undergrowth.</p> <p>Along an E and W fence.</p>					
3.85	<p>Graded dirt road, bears S. 10° E. and N. 10° W.</p>					
20.09	<p>The E 1/16 sec. cor. of secs. 10 and 15, monumented with a local open end metal pipe, 3½ ft. long, 2 ins. diam., projecting 2½ ft. above ground. This position is harmoniously related to existing survey cors. in the area and is accepted as the cor. position.</p> <p>At the cor. pt.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T13N R5E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding-right: 10px;">E 1/16</td> <td style="border-left: 1px solid black; padding-left: 10px;">S10</td> </tr> <tr> <td></td> <td style="border-left: 1px solid black; padding-left: 10px;">S15</td> </tr> </table> <p>1974</p> </div> <p>Deposit broken glass at the base of the iron post.</p> <p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, N of the cor.</p> <p>Reset the local pipe alongside the iron post.</p> <p>The cor. is located in an E and W fence.</p> <p>From this pt., U.S.C. & G.S. triangulation station "MESA 1959," bears N. 36°45'45" E., 43.135 chs. dist., a brass tablet cemented in a drill hole in a boulder, 4 x 5 ft., 4 ins. above ground.</p>	E 1/16	S10		S15	
E 1/16	S10					
	S15					
	<hr style="width: 20%; margin: 10px auto;"/> <p>N. 89°09' W., beginning new measurement.</p> <p>Continuing along a fence bearing E and W.</p>					
.28	<p>Fence, projects southerly.</p>					
20.09	<p>The ¼ sec. cor. of secs. 10 and 15, monumented with a local open end metal pipe, 1 in. diam., set in concrete alongside a metal pipe, 5 ins. diam., projecting 5 ft. above ground. This position is harmoniously related to existing survey cors. in the area and is accepted as the best available evidence of the original cor. position; impractical to remonument.</p> <p>The cor. is located in an E and W fence.</p>					
	<hr style="width: 20%; margin: 10px auto;"/> <p>N. 87°18' W., beginning new measurement.</p> <p>Along the N side of a fence bearing E and W.</p>					
4.775	<p>The closing cor. of secs. 10 and 15, on line 4-1 of the abandoned Fort Verde Garden Reservation; heretofore described.</p>					

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From this pt., the closing cor. of secs. 9 and 10, on line 4-1 of the abandoned Fort Verde Garden Reservation, bears N. 35°04' W., 61.58 chs. dist., heretofore described.</p> <hr/> <p>N. 89°49' W., beginning new measurement.</p> <p>Along the N side of an E and W fence.</p>
5.80	Wickiup Creek, 50 lks. wide, with 10 ft. walls, drains S. 25° W.
6.10	Enter medium to dense undergrowth, bears N. 25° E. and S. 25° W.
8.60	Graded gravel road, in a curve, bears N. 5° E. and S. 10° E.
8.75	Fence cor., bears South, 7 lks. dist.; fences extend easterly, S. 10° E. and westerly.
13.58	Intersect an open end metal pipe, 1 in. diam., projecting 2 ins. above ground.
13.79	Fence cor., bears North 3 lks. dist.; fences extend easterly, southerly and westerly.
14.00	Graded gravel road, bears S and North, 50 lks. dist. to the main graded gravel road, which in a curve, bears NE and S. 80° W., curving westerly.
23.90	Graded gravel road, bears N. 85° E. and S. 85° W.
35.39	The cor. of secs. 9, 10, 15 and 16.
	<p>Land, nearly level to gently rolling. Soil, E 3/4 mile, clay loam; remainder, gravelly. Undergrowth, creosote bush, mesquite, catclaw and cacti.</p> <hr/> <p>N. 0°45' E., bet. secs. 9 and 10.</p> <p>Ascending over a S slope, through scattering to medium undergrowth.</p>
8.80	Top of ascent, continue over rolling land.
15.60	Wash, 20 lks. wide, 2 ft. deep, drains S. 60° W.
40.20	Bladed road, bears E and W.
40.37	<p>The 1/4 sec. cor. of secs. 9 and 10, monumented with an iron post, 2 1/2 ins. diam., projecting 4 ins. above ground, with brass cap mkd. as described in the official record of the 1964 remonumentation of cadastral survey cors., T. 13 N., R. 5 E.</p> <p>A mound of stone, 3 ft. base, 18 ins. high, is W of the cor.</p> <hr/>

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

	CHAINS		
		N. 2°41' W., beginning new measurement.	
	9.905	The closing cor. of secs. 9 and 10, on line 4-1 of the abandoned Fort Verde Garden Reservation; heretofore described. From this pt., Cor. No. 1 of the abandoned Fort Verde Garden Reservation, bears N. 35°11' W., 14.74 chs. dist.; heretofore described.	
		N. 0°01' E., beginning new measurement.	
	11.70	Wash, 20 lks. wide, 4 ft. deep, drains N. 60° W.	
	12.80	Wash, 10 lks. wide, 3 ft. deep, drains N. 65° W.	
	17.30	Forest Highway No. 9, asphalt surfaced, bears S. 47° E. and N. 47° W.	
	17.975	The closing cor. of secs. 9 and 10, on line 1-2 of the abandoned Fort Verde Garden Reservation; heretofore described. From this pt., Cor. No. 1 of the abandoned Fort Verde Garden Reservation, bears S. 55°05' W., 10.38 chs. dist.; heretofore described.	
		N. 4°35' E., beginning new measurement.	
	6.30	Unimproved dirt road, bears NE and SW.	
	7.80	Gully, 15 lks. wide, with 10 ft. walls, drains W.	
	12.30	Abandoned bladed road, bears S. 65° E. and N. 65° W.	
	12.66	The cor. of secs. 3, 4, 9 and 10, monumented with an iron post, 2½ ins. diam., projecting 6 ins. above ground, with brass cap mkd. as described in the official record of the 1964 remonumentation of cadastral survey cors. in T. 13 N., R. 5 E. A mound of stone, 2½ ft. base, 2 ft. high, is W of the cor. Land, rolling. Soil, clay loam. Timber, scattering juniper in the N ½ mile. Undergrowth, creosote bush, mesquite and cacti.	
		From the cor. of secs. 2, 3, 10 and 11. S. 87°29' W., bet. secs. 3 and 10. Over rolling, broken land, through scattering timber and medium undergrowth.	
	3.40	Fence, bears N and South, 235 lks. dist. to a fence cor. fences extend N and S. 70° E.	
	20.20	Wickiup Creek, 40 lks. wide, with 7 ft. walls, drains S. 5° W.	

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
32.00	Wash, 40 lks. wide, with 8 ft. walls, drains S. 25° E.
37.80	Wash, 20 lks. wide, 3 ft. deep, drains S.
39.20	Ascend E slope.
41.73	<p>The ¼ sec. cor. of secs. 3 and 10, monumented with a limestone, 12 x 10 x 9 ins., firmly set 6 ins. in the ground, dimly mkd. ¼ on the N face, with a scattered mound of stone N.</p> <p>At the cor. pt.</p> <p>Reset the mkd. stone, 6 ins. in the ground and in a collar of stone, 3 ft. base, 3 ins. high and remarked ¼ on the N face of the cor.</p> <p>Raise a mound of stone, 4 ft. base, 2½ ft. high, N of the cor.</p> <p>Cor. is located 5 lks. S of old abandoned fence, bearing irregularly E and W.</p> <hr/> <p>N. 84°06' W., beginning new measurement.</p> <p>Ascending E slope.</p>
1.45	Saddle in a ridge, bears N and S; descend W slope.
9.00	Bottom of descent, thence over rolling land.
23.96	<p>The closing cor. of secs. 3 and 10 on line 1-2 of the abandoned Fort Verde Garden Reservation; heretofore described. This pt. functions for inside the reservation only.</p> <p>From this pt. the closing cor. of secs. 9 and 10 on line 1-2 of the abandoned Fort Verde Garden Reservation, bears S. 54°42' W., 20.215 chs. dist., heretofore described.</p> <p>Land, rolling. Soil, clay loam and rocky. Timber, scattering juniper. Undergrowth, creosote bush, mesquite and cacti.</p>
	<p>From the standard cor. of secs. 32 and 33, on the S. bdy. of the Tp., monumented with an iron post, 2 ins. diam., projecting 4 ins. above a mound of stone, 2½ ft. base, 2 ft. high, with brass cap mkd. as described in the official record of the 1923 resurvey of the 3rd Stan. Par. N, through part of R. 5 E.</p> <p>N. 1°57' W., bet. secs. 32 and 33.</p> <p>Over heavily rolling land, through scattering timber and medium undergrowth.</p>
1.10	Draw, drains NE.
14.20	Wash, 30 lks. wide, 2 ft. deep, drains N. 70° E.

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
22.10	Graded dirt road, bears NE and SW.
33.80	Wash, 80 lks. wide, 2 ft. deep, drains NE.
40.05	The $\frac{1}{4}$ sec. cor. of secs. 32 and 33, monumented with an iron post, 1 in. diam., projecting 15 ins. above ground, with brass cap mkd. as described in the official record of the 1923 resurvey of part of the subdivisional lines of T. 13 N., R. 5 E.
	A mound of stone, 3 ft. base, 1 ft. high, is W of the cor.
	N. $2^{\circ}01'$ W., beginning new measurement.
1.40	Wash, 100 lks. wide, 1 ft. deep, drains N. 70° E.
18.00	Wash, 100 lks. wide, 1 ft. deep, drains N. 70° E.
39.88	The cor. of secs. 28, 29, 32 and 33, monumented with an iron post, 2 ins. diam., projecting 12 ins. above ground, with brass cap mkd. as described in the official record of the 1923 resurvey of part of the subdivisional lines of T. 13 N., R. 5 E.
	A mound of stone, 3 ft. base, 2 ft. high, is W of the cor.
	The cor. is in a small wash, draining E.
	Land, rolling. Soil, sandy loam and rocky. Timber, juniper. Undergrowth, creosote bush, mesquite, catclaw and cacti.
	From the true pt. for the cor. of secs. 27, 28, 33 and 34.
	N. $88^{\circ}14'$ W., bet. secs. 28 and 33.
	Over gently rolling land, through partially cleared area.
.60	Irrigation ditch, 30 lks. wide, flows S. 40° E.
4.40	Graded gravel road, in a curve, bears S and W, thence along the S edge of the same road.
19.00	Enter medium to dense undergrowth; graded gravel road turns N at this pt.
20.00	Pt. for the E $\frac{1}{16}$ sec. cor. of secs. 28 and 33.
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 23 ins. in the ground, with brass cap mkd.
	T13N R5E E $\frac{1}{16}$ $\frac{S28}{S33}$ 1974
	from which
	A granite boulder, $2\frac{1}{2} \times 2 \times 2$ ft. above ground, bears S. 17° W., 155 lks. dist., mkd. X BO on top.
	A mesquite, 4 ins. diam., bears S. 29° W., 107.5 lks. dist., mkd. E $\frac{1}{16}$ S33 BT.

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
	Set a re-bar, 23 ins. long, ½ in. diam., alongside the iron post.
38.30	Wash, 10 lks. wide, 2 ft. deep, drains N. 20° E.
40.00	The ¼ sec. cor. of secs. 28 and 33, monumented with an iron post, 1 in. diam., projecting 12 ins. above ground, with brass cap mkd. as described in the official record of the 1923 resurvey of part of the subdivisional lines of T. 13 N., R. 5 E.
	A mound of stone, 2 ft. base, 1 ft. high, is N of the cor.

	N. 88°17' W., beginning new measurement.
2.20	Power line, bears S. 35° E. and N. 35° W.
3.30	Wash, 10 lks. wide, 2 ft. deep, drains N. 35° E.
13.40	Graded gravel road, in a curve, bears S. 35° E. and N. 25° W.
20.00	Pt. for the W 1/16 sec. cor. of secs. 28 and 33; not monumented.
21.20	Wash, 30 lks. wide, 2 ft. deep, drains N. 35° E.
23.50	Wash, 50 lks. wide, 2 ft. deep, drains N. 20° E.
25.40	Wash, 10 lks. wide, 3 ft. deep, drains N. 20° E.
40.00	The cor. of secs. 28, 29, 32 and 33.
	Land, gently rolling. Soil, sandy loam and rocky. Timber, juniper and pinyon pine. Undergrowth, creosote bush, catclaw, mesquite, scrub oak and cacti.

	N. 0°20' W., bet. secs. 28 and 29.
	Over rolling land, through medium to dense undergrowth.
2.80	Wash, 10 lks. wide, 2 ft. deep, drains S. 85° E.
19.98	Pt. for the S 1/16 sec. cor. of secs. 28 and 29; not monumented.
35.15	Telephone line, bears N. 60° E. and S. 60° W.
39.50	Graded gravel road, bears N. 55° E. and S. 55° W.
39.96	The ¼ sec. cor. of secs. 28 and 29, monumented with an iron post, 1 in. diam., projecting 12 ins. above ground, with brass cap mkd. as described in the official record of the 1923 resurvey of part of the subdivisional lines of T. 13 N., R. 5 E.
	A mound of stone, 2 ft. base, 1 ft. high, is W of the cor.

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
	N. 6°39' E., beginning new measurement.
11.20	Power line, bears S. 35° E. and N. 35° W.
35.80	Wash, 10 lks. wide, 3 ft. deep, drains N. 75° E.
40.72	The cor. of secs. 20, 21, 28 and 29, monumented with a granite stone, 23 x 14 x 7 ins., firmly set 16 ins. in the ground, with the top 8 ins. broken off and lying on the ground, mkd. with 4 grooves on one face and 2 grooves on another face and a scattered mound of stone W of the cor.
	At the cor. pt.
	Set an iron post, 28 ins. long, 2½ ins. diam., 16 ins. in the ground and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T13N R5E S20 S21 S29 S28 1974
	from which
	A granite boulder, 4 x 6 x 4 ft. above ground, bears S. 57°45' E., 23 lks. dist., mkd. X BO on the NW face.
	A granite boulder, 2½ x 2 x 1½ ft. above ground, bears N. 17° W., 57.5 lks. dist., mkd. X BO on the S face.
	Deposit the granite stone, alongside the iron post.
	From this pt., a local monument, a granite stone, 14 x 10 x 10 ins., loosely set in a mound of stone, dimly mkd. with 2 grooves on one face, 4 grooves on another face, and an X on top, bears N. 37°30' W., 22 lks. dist. This stone is at a fence cor.; fences extend N. 5° E., easterly and N. 86° W.
	Land, rolling. Soil, sandy loam and rocky. Timber, scattering juniper. Undergrowth, creosote bush, catclaw, mesquite, scrub oak and cacti.
	From the cor. of secs. 21, 22, 27 and 28.
	N. 88°57' W., bet. secs. 21 and 28.
	Over nearly level land, through medium undergrowth.
	Along an E and W fence.
15.10	Fence, projects N; enter open pasture, bears N and S.
20.80	Fence, projects N.
21.20	Fence, projects N.

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
22.20	Fence, projects S.
40.75	Fence cor.; fences extend N and E.
41.00	Woods Ditch, flows S.
41.51	The $\frac{1}{4}$ sec. cor. of secs. 21 and 28, monumented with a granite stone, firmly set 10 x 10 x 6 ins. above ground, mkd. $\frac{1}{4}$ on the W face and X on top; not remonumented.
<hr style="width: 20%; margin: auto;"/>	
N. 89°09' W., beginning new measurement.	
Over gently rolling land, through scattering timber and medium undergrowth.	
1.20	Power line, bears S. 20° E. and N. 20° W.
2.20	Graded gravel road, bears S. 20° E. and N. 20° W., thence along an E and W fence, on the N side of a graded gravel road.
14.80	Fence, bears N and S.
18.845	Pt. for the W 1/16 sec. cor. of secs. 21 and 28.
Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.	
<p>T13N R5E W 1/16 $\frac{S21}{S28}$ 1974</p>	
from which	
A fence cor., bears S. 28° E., 4,5 lks. dist.; fences extend easterly and N. 18° W.	
A concrete slab, 4 x 3 x 1 ft. above ground, bears N. 55°15' W., 132 lks. dist., mkd. X B0 on top.	
Deposit broken glass at base of the iron post.	
Raise a mound of stone, 2½ ft. base, 1 ft. high, N of the cor.	
Cor. is located 25 lks. N of a graded gravel road, bearing easterly and westerly.	
26.30	Wash, 30 lks. wide, 3 ft. deep, drains N. 40° E.
26.50	Ascend E slope.
26.60	Graded gravel road, bears S. 35° E. and N. 35° W.
37.69	The cor. of secs. 20, 21, 28 and 29.
<p>Land, gently rolling to rolling. Soil, clay loam; rocky in W½ mile. Timber, juniper. Undergrowth, catclaw, mesquite and cacti.</p>	

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
	N. 2°49' E., bet. secs. 20 and 21.
	Over rolling land, through medium undergrowth.
.20	Fence, bears E and W.
2.50	Spur, slopes SE.
36.97	The ¼ sec. cor. of secs. 20 and 21, monumented with a granite stone, 21 x 12 x 11 ins., firmly set 18 ins. in the ground, mkd. ¼ on the W face.
	At the cor. pt.
	Set an iron post, 28 ins. long, 2½ ins. diam., 21 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T13N R5E $\frac{1}{4}$ S20 S21 1974</p>
	from which
	<p style="padding-left: 40px;">A granite boulder, 3 x 5 x 4 ft. above ground, bears N. 10° E., 111 lks. dist., mkd. X BO on the S face.</p>
	<p style="padding-left: 40px;">A granite boulder, 3 x 4 x 1 ft. above ground, bears S. 82°10' W., 62.5 lks. dist., mkd. X BO on the E face.</p>
	Raise a mound of stone, 4 ft. base, 3 ft. high, W of the cor.
	Deposit the mkd. stone alongside the iron post.
	<hr style="width: 20%; margin: auto;"/> <p style="text-align: center;">N. 0°33' W., beginning new measurement.</p>
7.60	Fence, bears S. 50° E. and N. 50° W.
9.70	Graded gravel road, bears S. 30° E. and N. 30° W.
13.20	Power line, bears S. 15° E. and N. 15° W.
15.40	Woods Ditch, 10 lks. wide, flows S. 55° E.
16.70	Fence, bears S. 50° E. and N. 50° W.
17.50	Present right bank of the Verde River, 3 to 6 ft. high, bears S. 60° E. and N. 60° W.
19.20	Present left bank of the Verde River, 2 ft. high, bears S. 50° E. and N. 50° W., thence over nearly level land, through scattering timber.
20.435	Pt. for the N 1/16 sec. cor. of secs. 20 and 21.
	Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 2 ft. base to top, with brass cap mkd.

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS		
	<p style="text-align: center;">T13N R5E N 1/16 S20 S21 1974</p> <p>from which</p> <p style="padding-left: 40px;">A cottonwood, 18 ins. diam., bears S. 37°30' E., 262 lks. dist., mkd. N 1/16 S21 BT.</p> <p style="padding-left: 40px;">A cottonwood, 12 ins. diam., bears S. 11° W., 39.5 lks. dist., mkd. N 1/16 S20 BT.</p>	
34.40	Fence cor.; fences extend northerly, along the sec. line, and S. 20° E., thence along fence.	
40.68	Fence cor.; fences extend northerly, easterly and southerly.	
40.87	The cor. of secs. 16, 17, 20 and 21, monumented with a local iron post, 2½ ins. diam., projecting 12 ins. above ground, with brass cap mkd.	
	<p style="text-align: center;">RANCHO ROCA ROJA S17 S16 S20 S21 1940</p> <p>from which</p> <p style="padding-left: 40px;">A cottonwood, 4 ft. diam., bears S. 65°30' W., 135 lks. dist., mkd. with an open blaze.</p> <p>A basalt stone, 18 x 14 x 12 ins., mkd. with 4 grooves on the E and 3 grooves on the S faces, is buried alongside the iron post.</p> <p>The cor. is located 2 lks. W of a N and S fence.</p> <p>This pt. is not remonumented.</p> <p>Land, rolling to nearly level. Soil, sandy loam and rocky. Timber, scattering cottonwood along the river. Undergrowth, mesquite and catclaw.</p>	
	<p>From the cor. of secs. 15, 16, 21 and 22.</p> <p>S. 89°02' W., bet. secs. 16 and 21.</p> <p>Over gently rolling land, through scattering timber and medium undergrowth.</p>	
13.50	Track road, bears N. 60° E. and S. 60° W.	
17.40	Track road, bears S. 70° E. and N. 70° W.	
19.01	A local iron post, 2½ ins. diam., projecting 24 ins. above ground, with brass cap mkd.	

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
	RANCHO ROCA ROJA SE. COR. 1/16 COR. 1940
20.00	Graded road, bears N. 30° E. and S. 30° W.
21.10	Descent 15 ft. to creek bottom, bears N. 35° E. and S. 35° W.
21.20	Irrigation ditch, 5 lks. wide, flows N. 35° E.
23.60	Clear Creek, 30 lks. wide, with banks 2 to 4 ft. high, course SW.
30.90	Fence cor.; fences extend N and W, thence along fence.
34.90	Fences project N and S.
37.94	The ¼ sec. cor. of secs. 16 and 21, monumented with a local iron post, 2½ ins. diam., projecting 18 ins. above ground, with brass cap mkd.
	RANCHO ROCA ROJA ¼ S16 S21 1940
	from which A sycamore, 28 ins. diam., bears N. 22° W., 191 lks. dist., mkd. with a healed blaze. A basalt stone, 16 x 15 x 4 ins., mkd. ¼ on the N face, is buried alongside the iron post. The cor. is located in a fence cor.; fences extend easterly and southerly. This pt. is not remonumented.
	From the true pt. for the cor. of secs. 8, 9, 16 and 17. From this pt., the witness cor. of secs. 8, 9, 16 and 17, bears S. 0°41' W., 2.40 chs. dist., monumented with a local iron post, 2½ ins. diam., projecting 18 ins. above ground, with brass cap mkd.
	RANCHO ROCA ROJA WC S17 S16 SUR. 1940
	from which A cottonwood, 5 ft. diam., bears S. 23°15' W., 130 lks. dist., mkd. with a healed blaze.

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
	N. 1°41' E., bet. secs. 8 and 9. Over river bottom land, subject to overflow, through medium timber and undergrowth.
9.40	Present right bank of the Verde River, 3 ft. high, bears S. 80° E. and N. 80° W.
11.70	Present left bank of the Verde River, 3 ft. high, bears S. 80° E. and N. 80° W.
18.00	Fence cor.; fences extend N. 1°41' E. and S. 40° E., thence along fence.
25.00	Canal, 30 lks. wide, course S. 60° E.
25.80	Power line, bears SE and NW.
26.20	Fence extends S. 55° E.
30.00	Canal, 20 lks. wide, course E.
36.05	A local iron post, 2½ ins. diam., projecting 26 ins. above ground, with brass cap mkd.
	<p>RANCHO ROCA ROJA CVMR NW COR</p> <p>SUR 1940</p>
37.13	Pt. for the closing cor. of secs. 8 and 9, at intersection with line 5-1, the S. bdy. of the abandoned Camp Verde Military Reservation; not monumented. From this pt., Cor. No. 5, the SE cor. of the abandoned Camp Verde Military Reservation, bears S. 86°34' E., 77.40 chs. dist.; heretofore described.
37.17	Fence cor.; fences extend N. 1°40' E., S. 87° E. and S. 1°40' W.
39.65	Graded gravel road, in a curve, bears N. 55° E. and S. 55° W.
40.96	The ¼ sec. cor. of secs. 8 and 9, monumented with an iron post, 2½ ins. diam., projecting 10 ins. above ground, with brass cap mkd. as described in the official record of the 1964 remonumentation of cadastral survey cors., T. 13 N., R. 5 E. A mound of stone, 3 ft. base, 1 ft. high, is W of the cor. Cor. is in a N and S fence.
	<hr style="width: 20%; margin: 0 auto;"/>
	N. 1°36' E., beginning new measurement. Over nearly level land, through medium undergrowth. Along a fence, bears N. 1°36' E. and S. 1°36' W.

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
40.95	<p>Pt. for the cor. of secs. 4, 5, 8 and 9, determined longi- tudinally by a N and S fence, and at proportionate dist. latitudinally. This position falls on the 7th rail W of the E edge of a cattle guard, which bears N and S across a graded dirt road, bearing E and W.</p> <p>At the cor. pt.</p> <p>Mkd. the rail.</p> <p style="text-align: center;">T13N R5E $\begin{array}{r l} \hline S & 5 \\ \hline S & 8 \end{array} \begin{array}{l} S & 4 \\ \hline S & 9 \end{array}$ 1974</p> <p>from which</p> <p style="padding-left: 40px;">An iron post, 28 ins. long, 2½ ins. diam., set 22 ins. in the ground, for a reference monument, bears S. 45° E., 59.1 lks. dist., mkd. T13N R5E S9 RM 39 Ft. 1974 and an arrow pointing to the cor.</p> <p style="padding-left: 40px;">An iron post, 28 ins. long, 2½ ins. diam., set 22 ins. in the ground, for a reference monument, bears N. 45° W., 59.1 lks. dist., mkd. T13N R5E S5 RM 39 Ft. 1974 and an arrow pointing to the cor.</p> <p>Land, nearly level to gently rolling. Soil, sandy loam and gravelly. Timber, cottonwood along river. Undergrowth, mesquite, catclaw and cacti.</p>
4.70 17.40 22.90 25.40 27.40 28.60 35.00 39.88	<p>From the ¼ sec. cor. of secs. 4 and 9, monumented with an iron post, 1 in. diam., projecting 12 ins. above ground, in a mound of stone, 3 ft. base, 6 ins. high, with brass cap mkd. as described in the official record of the 1916 resurvey of a portion of the subdivisional lines of T. 13 N., R. 5 E.</p> <p>N. 88°48' W., bet. secs. 4 and 9.</p> <p>Over nearly level land, through medium undergrowth.</p> <p>Wash, 10 lks. wide, 2 ft. deep, drains S. 10° W.</p> <p>Enter dense creosote bush, bears N. 10° E. and S. 10° W.</p> <p>East edge of Camp Verde Airstrip, bears S. 20° E. and N. 20° W.</p> <p>West edge of Camp Verde Airstrip, bears S. 20° E. and N. 20° W.</p> <p>Dirt road, bears S. 20° E. and N. 20° W.</p> <p>Dirt road, bears S. 70° E. and N. 70° W.</p> <p>Dirt road, bears irregularly E and W, thence along road.</p> <p>The cor. of secs. 4, 5, 8 and 9.</p>

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Land, nearly level. Soil, clay loam. Undergrowth, creosote bush, mesquite and cacti; no timber.</p> <hr/> <p>N. 0°02' W., bet. secs. 4 and 5. Over gently rolling land, through medium undergrowth. Along a N and S fence.</p>
25.10	Fence cor.; fences extend N, S and W.
40.05	<p>The $\frac{1}{4}$ sec. cor. of secs. 4 and 5, monumented with an iron post, 2½ ins. diam., projecting 5 ins. above ground, with brass cap mkd. as described in the official record of the 1964 remonumentation of cadastral survey cors., T. 13 N., R. 5 E.</p> <p>A mound of stone, 2 ft. base, 1 ft. high, is W of the cor.</p> <hr/> <p>N. 0°02' W., beginning new measurement.</p>
.05	Fence cor.; fences extend N, S and W.
1.10	Forest Highway No. 9, asphalt surfaced, bears E and W.
27.50	Spur, slopes W.
40.02	<p>The cor. of secs. 4, 5, 32 and 33 on the N. bdy of the Tp., monumented with an iron post, 2½ ins. diam., projecting 7 ins. above ground, with brass cap mkd. as described in the official record of the 1964 remonumentation of cadastral survey cors., T. 14 N., R. 5 E.</p> <p>Land, gently rolling to rolling. Soil, clay loam. Undergrowth, creosote bush, mesquite and cacti; no timber.</p> <hr/> <p>From the cor. of secs. 20, 21, 28 and 29, heretofore described. West, bet. secs. 20 and 29. Over rolling land, through scattering timber and medium undergrowth.</p>
10.90	Wash, 20 lks. wide, 3 ft. deep, drains S. 55° E.
24.20	Power line, bears S. 35° E. and N. 35° W.
39.97	<p>The $\frac{1}{4}$ sec. cor. of sec. 20 only, monumented with an iron post, 1 in. diam., projecting 10 ins. above a mound of stone, 3 ft. base, 1 ft. high, with brass cap mkd. as described in the 1916 survey of a portion of the subdivisional lines of T. 13 N., R. 5 E.</p> <hr/> <p>West, beginning new measurement.</p>
25.80	Bladed road, bears N. 5° E. and S. 5° W.

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
26.60	Fence, bears N. 85° E. and S. 85° W.
35.40	Fence, bears N and S, 61 lks. dist., to a fence cor.; fences extend N, N. 85° E. and S. 85° W.
36.90	<p>The cor. of secs. 19, 20, 29 and 30, monumented with an iron post, 2 ins. diam., projecting 11 ins. above ground, mkd. as described in the official record of the 1916 survey of a portion of the subdivisional lines of T. 13 N., R. 5 E.</p> <p>A mound of stone, 2½ ft. base, 2 ft. high, is W of the cor.</p> <p>The cor. is located 80 lks. N of an E-W fence.</p> <p>Land, rolling. Soil, sandy and rocky. Timber, scattering juniper. Undergrowth, scrub oak, mesquite, catclaw and cacti.</p>
	<p>From the cor. of secs. 7, 8, 17 and 18, monumented with an iron post, 2 ins. diam., projecting 2 ins. above ground, with brass cap mkd. as described in the official record of the 1916 resurvey of part of the subdivisional lines of T. 13 N., R. 5 E.</p> <p>Cor. is located in a fence cor.; fences extend northerly and N. 89°17' E.</p> <p>S. 0°02' E., along the W. bdy. of sec. 17.</p> <p>Over rolling land, through scattering timber and medium undergrowth.</p>
.80	Small spur, slopes E.
2.20	Wash, 30 lks. wide, 1 ft. deep, drains N. 35° E.
5.00	Ascend N slope.
24.00	Ridge, bears N. 10° E. and S. 10° W.
34.50	Wash, 30 lks. wide, 2 ft. deep, drains N. 15° E.
40.12	<p>The ¼ sec. cor. of sec. 18 only, monumented with an iron post, 1 in. diam., projecting 6 ins. above ground, with brass cap erroneously mkd. for secs. 17 and 18. The cap is now mkd.</p>
	<p style="text-align: center;">T13N ¼ S18 R5E 1974 1916</p>
	<p style="text-align: center;">_____</p> <p>S. 0°01' W., beginning new measurement.</p>
1.48	<p>Pt. for the ¼ sec. cor. of sec. 17 only, at proportionate dist. This cor. position was not monumented in 1916.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS

T13N R5E
|
1/4 S17
1974

Raise a mound of stone, 3 ft. base, 2 ft. high, E of the cor.

3.50 Track road, bears N. 25° E. and S. 25° W.

4.30 Spur, slopes N. 25° E.

4.80 Fence cor. bears West, 45 lks. dist.; fences extend southerly and N. 50° W.

37.50 Wash, 30 lks. wide, 3 ft. deep, drains E.

39.84 The cor. of secs. 18 and 19 only, monumented with an iron post, 2 ins. diam., projecting 12 ins. above ground, with brass cap mkd. as described in the official notes of the 1916 survey of a portion of the subdivision of T. 13 N., R. 5 E. Add the marks S17 and 1974 to the brass cap which is now mkd.

T13N
R5E |
S18
S19 | S17
1974
1916

A mound of stone, 3 ft. base, 1 ft. high, is W of the cor.

The cor. is 19 lks. W of a fence, bearing irregularly N and S.

S 0°01' W., beginning new measurement, along the W bdy. of sec. 17.

2.99 The cor. of secs. 17 and 20 only, monumented with an iron post, 2 ins. diam., projecting 9 ins. above ground, with the brass cap mkd. as described in the official record of the 1916 survey of a portion of the subdivision of T. 13 N., R. 5 E. Add the marks S19 and 1974 to the brass cap which is now mkd.

T13N
R5E |
S17
S20 | S19
1974
1916

A scattered mound of stone, is E of the cor.

The cor. is located on the N edge of a jeep trail, bearing N. 15° E. and S. 15° W., and 27 lks. W of a fence, bearing irregularly N and S.

The cor. is also under a power line, bears S. 39° E. and N. 39° W.

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Land, rolling. Soil, sandy and rocky. Undergrowth, oak brush, mesquite, catclaw and cacti; no timber.</p>
	<p>From the true pt. for the cor. of secs. 8, 9, 16 and 17. N. 86°22' W., bet. secs. 8 and 17. Over nearly level land.</p>
5.30	Graded dirt road, bears S. 65° E. and N. 65° W.
24.30	Graded dirt road, bears S. 25° E. and N. 25° W.
25.80	Power line, bears S. 20° E. and N. 20° W.
37.20	Fence, bears S. 5° E. and N. 5° W.
37.60	Fence, bears S. 40° E. and N. 40° W.
37.80	Woods Ditch, 10 lks. wide, flows S. 40° E.
40.57	Power line, bears N and S.
40.66	Fence, bears N and S, 10 lks. dist. to a fence cor.; fences extend N, S and W.
40.95	<p>The $\frac{1}{4}$ sec. cor. of secs. 8 and 17, monumented with a local open end metal pipe, 18 ins. long, 1 in. diam., buried 2$\frac{1}{2}$ ft. below the earth's surface. This position is harmoniously related to existing survey cors. in the area and is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. pt.</p> <p>Reset the local pipe, 14 ins. in the ground and in a collar of stone, 2 ft. base, 6 ins. high.</p> <p>From this pt., a local open end metal pipe, 1 in. diam., projecting 12 ins. above ground, bears S. 67°45' E., 31 lks. dist. This local pipe is at a fence cor.; fences extend N, S and W. Local residents acknowledge the presence of this N and S fence for the past 60 years. In the official notes of the 1916 resurvey of part of the subdivisional lines of T. 13 N., R. 5 E., the $\frac{1}{4}$ sec. cor. of secs. 8 and 17 was set 19 lks. W of a N and S fence.</p>
	<p>S. 89°17' W., beginning new measurement.</p> <p>Over rolling land, through scattering timber and medium undergrowth.</p> <p>Along an E and W fence.</p>
11.70	Graded gravel road, bears S. 55° E. and N. 55° W.
11.90	Power line, bears S. 25° E. and N. 25° W.
15.20	Draw, drains N. 60° E.
19.17	Pt. for the W 1/16 sec. cor. of secs. 8 and 17.

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T13N R5E $\begin{array}{r} S\ 8 \\ W\ 1/16\ \hline S17 \\ 1974 \end{array}$</p> <p>from which</p> <p>A head stone, 3 x 1½ x 1 ft. in size, bears N. 68°45' E., 250 lks. dist., with a brass plate attached, inscribed LEN YOUNG Apr. 2, 1872-Jan. 15, 1930.</p> <p>A fence cor., bears N. 87°30' E., 15 lks. dist., fences extend N, N. 89°17' E. and S. 89°17' W.</p> <p>A re-bar, ¾ in. diam., projecting 10 ins. above ground, bears West, 5 lks. dist. This re-bar is at a fence cor.; fences extend E, S and W.</p>
20.20	Draw, drains N. 5° E.
27.20	Wash, 30 lks. wide, with 10 ft. banks, drains N. 25° E.
31.40	Descend W slope.
33.90	Enter basin, bears N and S.
37.20	Wash, 30 lks. wide, 1 ft. deep, drains N. 15° W.
38.34	<p>The cor. of secs. 7, 8, 17 and 18, monumented with an iron post, 2 ins. diam., projecting 4 ins. above ground, with brass cap mkd. as described in the official record of the 1916 resurvey of part of the subdivision of T. 13 N., R. 5 E.</p> <p>The cor. is located at a fence cor.; fences extend N and N. 89°17' E.</p> <p>Land, rolling. Soil, sandy and rocky. Undergrowth, oak brush, mesquite, catclaw and cacti; no timber.</p>
	<p>From the cor. of secs. 4, 5, 8 and 9.</p> <p>S. 89°57' W., bet. secs. 5 and 8.</p> <p>Over nearly level land.</p> <p>Along the center of a graded dirt road, bearing E and W.</p>
39.90	<p>The ¼ sec. cor. of secs. 5 and 8, monumented with a local steel pin, 3/8 in. diam., set 2 ins. below the surface of a graded dirt road. This position is harmoniously related to existing survey cors. in the area and is accepted as the best available evidence of the original cor. position; not remonumented.</p> <p>from which</p> <p>A power pole, bears S. 57°43' E., 62.3 lks. dist.</p>

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS		
	<p>A fence cor., bears S. 6°23' E., 39.5 lks. dist.; fences extend E, S and W</p> <p>A power pole, bears S. 81°57' W., 239 lks. dist., with aluminum tag marked 5 K1-10.</p> <hr/> <p>S. 89°54' W., beginning new measurement.</p> <p>Along a graded dirt road, bears E and W.</p>	
10.00	Graded dirt road becomes black top road.	
40.02	<p>The cor. of secs. 5, 6, 7 and 8, monumented with a small nail, at a road intersection; asphalt roads extend N, E and S and a graded gravel road extends W. This position was pointed out by an interested land owner in the area, is harmoniously related to existing survey cors., has been used by local private surveyors, and is accepted as the best available evidence of the original cor. position; no permanent monument established.</p> <p>From this pt., the ¼ sec. cor. of secs. 7 and 8, identical with the initial monument on the S line of the abandoned Camp Verde Military Reservation, bears S. 0°06' E., 40.10 chs. dist.; heretofore described.</p> <p>From this same pt., the cor. of secs. 1, 6, 7, and 12, on the W. bdy. of the Tp., bears N. 89°55' W., 79.78 chs. dist., monumented with an iron post, 28 ins. long, 2½ ins. diam, set 4 ins. below ground, mkd. as described in the official record of the 1964 remonumentation of cadastral survey cors. of T. 13 N., R. 5 E. Reset the iron post 25 ins. in the ground and add 1974 to the brass cap. Raise a mound of stone, 2 ft. base, 2 ft. high, W of the cor.</p> <p>The line bet. secs. 6 and 7 was fully retraced, and no evidence of the intervening ¼ sec. cor. was found.</p> <p>Land, nearly level. Soil, sandy loam. Undergrowth, creosote bush, mesquite and cacti; no timber.</p> <hr/> <p>N. 0°06' W., bet. secs. 5 and 6.</p> <p>Along the center of an asphalt road.</p>	
36.20	Asphalt road, in a curve, bears NE and S.	
37.80	Fence, bears N. 50° E. and S. 50° W.	
38.10	<p>Pt. for the meander cor. of secs. 5 and 6, on the left bank of the Verde River, identical to the witness ¼ sec. cor. of secs. 5 and 6, at proportionate dist.; there is no remaining evidence of the original cor. Not monumented.</p> <p>Enter medium timber and undergrowth, bears NE and SW.</p>	
38.60	Canal, 15 lks. wide, 10 ft. deep, flows S. 50° W.	
40.10	Pt. for the ¼ sec. cor. of secs. 5 and 6, at proportionate dist.; not monumented.	

Dependent Resurvey of a Portion of the
Subdivisional Lines, T. 13 N., R. 5 E.,
Gila and Salt River Meridian, Arizona

CHAINS		
41.00	Pt. for the meander cor. of secs. 5 and 6, on the present left bank of the Verde River, 2 to 4 ft. high, bears N. 49°10' E. and S. 49°10' W.; not monumented.	
42.65	Present right bank of the Verde River, 3 to 5 ft. high, bears N. 55° E. and S. 55° W.	
45.00	Power line, bears N. 10° E. and S. 10° W.	
52.20	Unimproved dirt road, bears N. 35° E. and S. 35° W.	
54.70	Fence, bears N. 40° E. and S. 40° W.	
60.10	Fence, bears N. 55° E. and S. 55° W.	
61.66	Pt. for the meander cor. of secs. 5 and 6, on the right bank of the Verde River, at proportionate dist.; there is no remaining evidence of the original cor. Not monumented.	
67.00	Enter residential area.	
80.20	The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp.; heretofore described.	
<p>Land, nearly level to gently rolling. Soil, clay loam; sandy and gravelly along river bottom. Undergrowth, mesquite, catclaw and salt cedar along river bottom. Timber, cottonwood along river bottom.</p>		
<p>Subdivision of Section 1, T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona</p>		
<p>From the ¼ sec. cor. of secs. 1 and 12.</p>		
<p>N. 1°04'30" E., along the N and S center line of sec. 1.</p>		
<p>Over rolling land, through medium undergrowth.</p>		
1.15	Top of mesa, bears SE and NW.	
6.60	Fence, bears E and W.	
19.66	Pt. for the center S 1/16 sec. cor. of sec. 1; not monumented.	
29.49	Pt. for the center N-S 1/64 sec. cor. of sec. 1.	
<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>		
<p>T13N R5E C N-S 1/64 S 1 C 1974</p>		
<p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, W of the cor.</p>		

Subdivision of Section 1,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.32	<p>Pt. for the center $\frac{1}{4}$ sec. cor. of sec. 1, at intersection with the E and W center line of sec. 1.</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T13N R5E C $\frac{1}{4}$ S 1 1974</p> <p>Raise a mound of stone, 3 ft. base, 1 ft. high, W of the cor.</p>
49.225	<p>Pt. for the center S-N $\frac{1}{64}$ sec. cor. of sec. 1.</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">C S-N $\frac{1}{64}$ S 1 C 1974</p> <p>Deposit broken glass at the base of the iron post.</p>
53.30	<p>Gully, 40 lks. wide, 12 ft. deep, drains S. 80° E.</p>
59.13	<p>Pt. for the center N $\frac{1}{16}$ sec. cor. of sec. 1; not monumented.</p>
60.00	<p>Begin steep ascent.</p>
76.70	<p>Top of steep ascent, ascend gradually.</p>
78.91	<p>The $\frac{1}{4}$ sec. cor. of sec. 1 only, on the N. bdy. of the Tp.</p>
	<hr/> <p>From the $\frac{1}{4}$ sec. cor. of sec. 1 only, on the E. bdy. of the Tp.</p> <p>N. $89^\circ 50' 30''$ W., along the E and W center line of sec. 1.</p> <p>Over rolling land, through medium undergrowth.</p>
18.00	<p>Wash, 30 lks. wide, 4 ft. deep, drains S. 50° W.</p>
20.235	<p>Pt. for the center E $\frac{1}{16}$ sec. cor. of sec. 1, at proportionate dist., based on the official 1888 survey plat.</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T13N R5E E $\frac{1}{16}$ C _____ C S 1 1974</p> <p>Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N of the cor.</p>
26.80	<p>Wash, 30 lks. wide, 5 ft. deep, drains S. 10° W.</p>
33.70	<p>Wash, 20 lks. wide, 4 ft. deep, drains S. 15° E.</p>

Subdivision of Section 1
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.10	Low spur, slopes S.
40.39	The center $\frac{1}{4}$ sec. cor. of sec. 1.
45.50	Track road, bears S. 10° E. and N. 10° W.
51.60	Same track road, bears N. 10° E. and S. 10° W.
59.99	Pt. for the center W $\frac{1}{16}$ sec. cor. of sec. 1.
	Set an iron post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T13N R5E W $\frac{1}{16}$</p> <p style="text-align: center;">C ————— C</p> <p style="text-align: center;">S 1 1974</p>
	Raise a mound of stone, 2 ft. base, 1½ ft. high, N of the cor.
60.40	Gully, 15 lks. wide, 8 ft. deep, drains S. 55° W.
65.00	Gully, 10 lks. wide, 8 ft. deep, drains S. 25° W.
71.20	Fence, bears N. 15° E. and S. 15° W.
75.90	Gully, 20 lks. wide, 10 ft. deep, drains S. 30° W.
77.60	Gully, 10 lks. wide, 6 ft. deep, drains S. 10° W.
79.59	The $\frac{1}{4}$ sec. cor. of secs. 1 and 2.
	NE $\frac{1}{4}$, Section 1
	From the center E $\frac{1}{16}$ sec. cor. of sec. 1.
	N. 0°35' E., along the N and S center line of the NE $\frac{1}{4}$ of sec. 1.
	Over rolling land, through medium undergrowth.
9.895	Pt. for the center S-NE $\frac{1}{64}$ sec. cor. of sec. 1.
	Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.
	S 1 C-S-NE $\frac{1}{64}$ 1974
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W of the cor.
14.60	Wash, 30 lks. wide, 5 ft. deep, drains S. 75° E.
19.79	Pt. for the NE $\frac{1}{16}$ sec. cor. of sec. 1, at intersection with the E and W center line of the NE $\frac{1}{4}$ of sec. 1; not monumented.

Subdivision of Section 1,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
20.00	Ascent steep S slope.
39.70	The pt. for the E 1/16 sec. cor. of sec. 1 only, on the N bdy. of the Tp.
<hr/> From the pt. for the N 1/16 sec. cor. of sec. 1 only, on the E. bdy. of the Tp.	
N. 89°51'30" W., along the E and W center line of the NE¼ of sec. 1.	
Over rolling land, through medium undergrowth.	
9.60	Gully, 10 lks. wide, 5 ft. deep, drains S.
12.50	Gully, 10 lks. wide, 4 ft. deep, drains S. 10° W.
14.30	Draw, drains S. 30° W.
20.155	The pt. for the NE 1/16 sec. cor. of sec. 1.
30.00	Wash, 20 lks. wide, 5 ft. deep, drains S. 55° E.
35.80	Wash, 10 lks. wide, 7 ft. deep, drains S. 85° E.
37.60	Ridge, bears S. 30° E. and N. 30° W.
39.10	Draw, drains S.
40.15	The pt. for the center N 1/16 sec. cor. of sec. 1.
<hr/> SE¼, Section 1	
From the pt. for the E 1/16 sec. cor. of secs. 1 and 12. N. 0°15'30" E., along the N and S center line of the SE¼ of sec. 1.	
Over rolling land, through medium undergrowth.	
5.90	Fence, bears E and W.
16.50	Wash, 30 lks. wide, 2 ft. deep, drains S. 40° E.
19.50	Ascend S slope.
19.86	Pt. for the SE 1/16 sec. cor. of sec. 1, at intersection with the E and W center line of the SE¼ of sec. 1; not monumented.
22.80	Ridge, bears NE and SW.
29.715	Pt. for the center N-SE 1/64 sec. cor. of sec. 1.
Set an iron post, 28 ins. long, 2½ ins. diam., over an X chiseled in solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.	

Subdivision of Section 1,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
	§ 1 C-N-SE 1/64 1974
37.20	Wash, 20 lks. wide, 2 ft. deep, drains S. 35° W.
39.57	The center E 1/16 sec. cor. of sec. 1.
	<hr/> From the pt. for the S 1/16 sec. cor. of sec. 1 only, on the E. bdy. of the Tp. N. 89°40' W., along the E and W center line of the SE $\frac{1}{4}$ of sec. 1. Over gently rolling land, through medium undergrowth.
3.60	Wash, 30 lks. wide, 4 ft. deep, drains SE.
9.50	Ridge, bears N. 15° E. and S. 15° W.
20.19	The pt. for the SE 1/16 sec. cor. of sec. 1.
22.60	Wash, 40 lks. wide, 3 ft. deep, drains S. 10° E.
26.60	Wash, 30 lks. wide, 3 ft. deep, drains S. 70° E.
40.63	The pt. for the center S 1/16 sec. cor. of sec. 1.
	<hr/> SW $\frac{1}{4}$, Section 1
	<hr/> From the W 1/16 sec. cor. of secs. 1 and 12. N. 1°02' E., along the N and S center line of the SW $\frac{1}{4}$ of sec. 1. Over rolling land, through scattering timber and medium undergrowth.
2.00	Ascend steep SE slope.
4.70	Spur, slopes SE.
7.90	Fence, bears E and W.
9.92	Pt. for the center S-SW 1/64 sec. cor. of sec. 1.
	Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.
	S 1 C-S-SW 1/64 1974
	Cor. is located on a steep E slope, 60 lks. E of the top of a ridge.
19.84	Pt. for the SW 1/16 sec. cor. of sec. 1, at intersection with the E and W center line of the SW $\frac{1}{4}$ of sec. 1; not monumented.

Subdivision of Section 1,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
24.00	Track road, bears N. 35° E. and S. 35° W.
39.66	The center W 1/16 sec. cor. of sec. 1.
	<hr/> From the pt. for the center S 1/16 sec. cor. of sec. 1.
	S. 89°42'30" W., along the E and W center line of the SW $\frac{1}{4}$ of sec. 1.
	Over rolling land, through scattering timber and medium undergrowth.
2.90	Track road, bears N. 15° E. and S. 15° W.
9.50	Ridge, bears S. 20° E. and N. 20° W.
19.59	The pt. for the SW 1/16 sec. cor. of sec. 1.
22.00	Track road, bears N. 30° E. and S. 30° W.
37.60	Fence, bears N. 10° E. and S. 10° W.
39.18	Pt. for the S 1/16 sec. cor. of secs. 1 and 2.
	<hr/> NW $\frac{1}{4}$, Section 1
	<hr/> From the center W 1/16 sec. cor. of sec. 1.
	N. 0°43' E., along the N and S center line of the NW $\frac{1}{4}$ of sec. 1.
	Over rolling land, through medium to dense undergrowth.
2.00	Wash, 10 lks. wide, 5 ft. deep, drains SW.
9.875	Pt. for the center S-NW 1/64 sec. cor. of sec. 1.
	Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> S 1 C-S-NW 1/64 1974 </div>
	Raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W of the cor.
19.75	Pt. for the NW 1/16 sec. cor. of sec. 1, at intersection with the E and W center line of the NW $\frac{1}{4}$ of sec. 1; not monumented.
36.00	Ridge, bears N. 85° E. and S. 85° W.
39.47	The pt. for the W 1/16 sec. cor. of sec. 1 only, on the N. bdy. of the Tp.
	<hr/> From the pt. for the center N 1/16 sec. cor. of sec. 1.

Subdivision of Section 1,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona


CHAINS	
	N. 89°57' W., along the E and W center line of the NW $\frac{1}{4}$ of sec. 1.
	Over rolling land, through scattering timber and medium undergrowth.
10.00	Draw, drains S. 10° E.
19.725	The pt. for the NW 1/16 sec. cor. of sec. 1.
27.30	Fence, bears N. 15° E. and S. 15° W.
28.70	Draw, drains SW.
39.47	The pt. for the N 1/16 sec. cor. of secs. 1 and 2.
	<p style="text-align: center;">Subdivision of Section 5, T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona</p>
	From the $\frac{1}{4}$ sec. cor. of secs. 5 and 8.
	N. 0°04' W., along the N and S center line of sec. 5.
	Over gently rolling land, through scattering timber and medium undergrowth.
.36	Fence, bears E and W.
20.00	Fence, bears S. 85° E. and N. 85° W.
31.00	Center of a graded gravel road, in a curve, bears N and SE, thence along same road.
40.06	Pt. for the center $\frac{1}{4}$ sec. cor. of sec. 5, at intersection with the E and W center line of sec. 5.
	Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 34 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T13N R5E C$\frac{1}{4}$ S 5 1974</p>
	from which
	<p style="text-align: center;">An iron post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., set 22 ins. in the ground, for a reference monument, bears East, 25 lks. dist., mkd. T13N R5E C$\frac{1}{4}$ S5 RM 16.5 FT. 1974 and an arrow pointing to the cor.</p>
	<p style="text-align: center;">An iron post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., set 23 ins. in the ground, for a reference monument, bears West, 25 lks. dist., mkd. T13N R5E C$\frac{1}{4}$ S5 RM 16.5 FT. 1974 and an arrow pointing to the cor.</p>
42.00	Road junction, Forest Highway No. 9, asphalt surfaced, bears E and W, and graded gravel road projects S.

Subdivision of Section 5,
T. 13 N., R. 5E., Gila and Salt River Meridian, Arizona

CHAINS	
43.30	Fence, bears E and W.
53.60	Center of concrete helicopter pad.
59.40	Fence, bears N. 85° E. and S. 85° W.
60.09	Pt. for the center N 1/16 sec. cor. of sec. 5.
	Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T13N R5E C N 1/16 S 5 C 1974</p>
	Raise a mound of stone, 2 ft. base, 1½ ft. high, W of the cor.
	From this pt., a local iron pipe, 2 ins. diam., projecting 18 ins. above ground, bears S. 86°51' W., 38 lks. dist.
70.00	Fence, bears N. 40° E. and S. 40° W.
70.60	Graded dirt road, bears N. 40° E. and S. 40° W.
71.00	Fence, bears N. 40° E. and S. 40° W.
80.12	The ¼ sec. cor. of secs. 5 and 32, on the N. bdy. of the Tp.
	From the ¼ sec. cor. of secs. 4 and 5.
	S. 89°58'30" W., along the E and W center line of sec. 5.
	Over gently rolling land, through scattering timber and medium undergrowth.
15.00	Graded gravel road, bears N and S.
21.80	Wash, 20 lks. wide, 2 ft. deep, drains S.
39.95	The center ¼ sec. cor. of sec. 5.
49.90	Track road, bears N. 10° E. and S. 10° W.
55.10	Power line, bears N and S.
60.30	Graded dirt road, bears N and S.
75.30	Asphalt road, bears NE and SW.
77.30	Fence, bears N. 50° E. and S. 50° W.
77.67	Pt. for the special meander cor. of sec. 5, on the adjusted record meander line of the left bank of the Verde River, bears N. 49°02' E. and S. 49°02' W.
	Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

Subdivision of Section 5
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS



Raise a mound of stone, 2½ ft. base, 1½ ft. high, E of the cor.


From this pt., the pt. for the ¼ sec. cor. of secs. 5 and 6, bears S. 89°58'30" W., 2.29 chs. dist.

Thence, N. 40°50' W., on a line normal to the present left bank of the Verde River, over land subject to overflow.

.60 Canal, 15 lks. wide, 10 ft. deep, flows S. 50° W.

2.185 Pt. for the special meander cor. of sec. 5, on the present left bank of the Verde River, bears N. 49°10' E. and S. 49°10' W.

Set an iron post, 28 ins. long, 2½ ins. diam., 21 ins. in the ground, and in a collar of stone, 3½ ft. base to top, with brass cap mkd.



NW¼, Section 5

From the center N 1/16 sec. cor. of sec. 5.

S. 89°59'45" W., along the E and W center line of the NW ¼ of sec. 5, on a mean bearing of the E and W center line and that part of the W½ mile of the N. bdy. of sec. 5, that is E of the Verde River.

Over nearly level land, through scattering timber and medium undergrowth.

.38 Fence, bears N and S.

6.10 Fence, bears N. 10° E. and S. 10° W.

6.50 Graded gravel road, bears N. 10° E. and S. 10° W.

6.80 Fence, bears N. 10° E. and S. 10° W.

9.50 Fence, bears N. 5° E. and S. 5° W.

14.60 Enter river bottom, bears NE and SW, thence through medium timber and dense undergrowth.

19.50 Canal, 20 lks. wide, 8 ft. deep, flows S. 25° W.


Subdivision of Section 5,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS

19.615

True pt. for the special meander cor. of sec. 5, on the adjusted record meander line of the left bank of the Verde River, bears N. 14°43' E. and S. 14°43' W. This position is on the W edge of a canal and impractical to monument.

From this pt., the pt. selected for the witness special meander cor. of sec. 5, on the adjusted record meander line of the left bank of the Verde River, bears S. 89°59'45" W., 20 lks. dist., monumented with an iron post, 28 ins. long, 2½ ins. diam., set 24 ins. in the ground, with brass cap mkd.




Deposit broken glass at the base of the iron post.

Thence, S. 88°50' W., on a line normal to the left bank of the Verde River, over land subject to overflow.

1.645

Pt. for the special meander cor. of sec. 5, on the present left bank of the Verde River, bears S. 1°10' E. and N. 1°10' W.

Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.




Subdivision of Section 9,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

From the ¼ sec. cor. of sec. 9 and 16, monumented with a local iron post, 48 ins. long, 2½ ins. diam., projecting 20 ins. above ground, with brass cap mkd. RANCHO ROCA ROJA ¼ S9 S16 SUR. 1940, with a volcanic stone, 21 x 12 x 11 ins., projecting 8 ins. above ground, mkd. ¼ on the N face, set alongside the local iron post.


At the cor. pt.

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.




Raise a mound of stone, 2 ft. base, 1½ ft. high, W of the cor.


Subdivision of Section 9
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

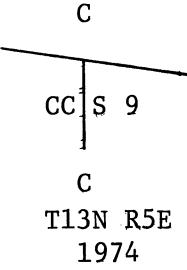CHAINS	
	Deposit the mkd. stone and local iron post alongside the cor.
	Cor. is located at the S edge of a fence cor.; fences extend N and E; cor. is also 30 lks. N of a graded gravel road, bears E and W.
	N. 0°53' E., along the N and S center line of sec. 9.
	Over rolling land, through medium undergrowth.
	Along a N and S fence.
25.70	Fence, extends E.
34.725	Intersect a local iron post, 2½ ins. diam., projecting 18 ins. above ground, mkd. RANCHO ROCA ROJA C.V.M.R. N.E. Cor. Sur. 1940.
35.895	Pt. for the closing cor. of sec. 9, on line 5-1 of the abandoned Camp Verde Military Reservation. Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;">  <p>C CC S 9 C T13N R5E 1974</p> </div>
	Raise a mound of stone, 2 ft. base, 1 ft. high, S of the cor.
	Cor. is at the E edge of a fence cor.; fences extend S and N. 86°34' W.
	From this pt., Cor. No. 5, the SE cor. of the abandoned Camp Verde Military Reservation; bears S. 86°34' E., 36.92 chs. dist.; heretofore described.
37.70	Draw, drains N. 70° W.
41.30	Graded gravel road, bears E and W.
41.48	Pt. for the center ¼ sec. cor. of sec. 9, at intersection with the E and W center line of sec. 9. Set an iron post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> <p>T13N R5E C¼ S 9 1974</p> </div>
	Raise a mound of stone, 3 ft. base, 2 ft. high, W of the cor.
51.00	Gully, 20 lks. wide, 8 ft. deep, drains S. 65° W.
58.20	Ridge, bears S. 80° E. and N. 80° W.

Subdivision of Section 9,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
65.30	Enter nearly level land, bears S. 70° E. and N. 70° W.
76.10	Graded gravel road, bears N. 65° E. and S. 65° W.
82.21	The ¼ sec. cor. of secs. 4 and 9.
	From the ¼ sec. cor. of secs. 9 and 10.
	N. 89°04'30" W., along the E and W center line of sec. 9.
	Over gently rolling land, through medium undergrowth.
5.00	Fence, bears N and S.
6.02	Pt. for the closing cor. of sec. 9, on line 4-5 of the abandoned Camp Verde Military Reservation.
	Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.
	
	Raise a mound of stone, 2½ ft. base, 1 ft. high, E of the cor.
	From this pt., cor. No. 5, the SE cor. of the abandoned Camp Verde Military Reservation, bears S. 21°51' E., 7.83 chs. dist.; heretofore described.
39.87	The center ¼ sec. cor. of sec. 9.
40.50	Graded gravel road, bears N and S, 20 lks. dist., to intersection of graded gravel roads extending N, E, S and W.
77.60	Graded gravel road, bears E and S. 55° W.
80.17	Power line, bears N and S.
80.27	The ¼ sec. cor. of secs. 8 and 9.
<p>Subdivision of Section 11, T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona</p>	
	From the ¼ sec. cor. of secs. 2 and 11.
	S. 0°27' W., along the N and S center line of sec. 11, on a mean bearing of the W. bdy. and that portion of the E. bdy. of sec. 11 which lies inside the abandoned Fort Verde Garden Reservation.
	Over rolling land, through scattering timber and medium undergrowth.

Subdivision of Section 11
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
20.05	Pt. for the center N 1/16 sec. cor. of sec. 11; not monumented.
39.90	Spur, slopes SE from W.
40.10	Pt. for the center 1/4 sec. cor. of sec. 11, at intersection with the E and W center line of sec. 11, identical with the NW cor. Lot 17 and the NE cor. Lot 18. Set an iron post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd. T13N R5E C 1/4 S11 1974 Raise a mound of stone, 2 1/2 ft. base, 2 ft. high, W of the cor.
58.075	Pt. for the SW cor. Lot 17, identical with the SE cor. Lot 18, at intersection with the center line of Forest Highway No. 9, asphalt surfaced, bears N. 74°39' E. and S. 74°39' W. Drive a railroad spike, flush with the surface of the road, with top mkd. <div style="text-align: center;">  <p>1974</p> </div> from which An iron post, 28 ins. long, 2 1/2 ins. diam., set 22 ins. in the ground, for a reference monument, bears S. 2°00' E., 110.6 lks. dist., with brass cap mkd. S11 RM 73 FT. 1974 and an arrow pointing to the cor. An iron post, 28 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 2°00' W., 110.6 lks. dist., with brass cap mkd. S11 RM 73 FT. 1974 and An arrow pointing to the cor.
59.23	Pt. for the center S 1/16 sec. cor. of sec. 11, at proportionate dist., based on the official 1888 survey plat; not monumented.
72.60	Pt. for the closing cor. of sec. 11, on line 3-4 of the abandoned Fort Verde Garden Reservation; identical with lot cors. of lots 6 and 10; not monumented. From this pt., the closing cor. of secs. 11 and 12 on the bdy. of the abandoned Fort Verde Garden Reservation, bears N. 55°52' E., 48.385 chs. dist., heretofore described.

Subdivision of Section 11
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From the $\frac{1}{4}$ sec. cor. of secs. 11 and 12.</p> <p>S. $89^{\circ}03'30''$ W., along the E and W center line of sec. 11.</p> <p>Over rolling land, through scattering timber and medium undergrowth.</p>
1.60	Graded gravel road, bears S and N approximately 3.00 chs. dist. to gypsum mining area.
3.60	Enter gypsum mining area, bears N and S.
19.895	<p>Pt. for the center E $\frac{1}{16}$ sec. cor of sec. 11, identical with the NW cor. lot 7 and the NE cor. lot 17.</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T13N R5E E $\frac{1}{16}$ C ————— C S11 1974</p>
	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, N of the cor.</p>
22.00	W edge of gypsum mining area, bears N and S.
30.20	Ridge, bears N. 10° E. and S. 10° W.
39.79	The center $\frac{1}{4}$ sec. cor. of sec. 11.
61.305	Pt. for the center W $\frac{1}{16}$ sec. cor. of sec. 11, identical with the NE cor. lot 4 and the NW cor. lot 18; not monumented.
82.82	The $\frac{1}{4}$ sec. cor. of secs. 10 and 11.
	<p>NE$\frac{1}{4}$, Section 11</p> <hr style="width: 20%; margin: auto;"/>
	<p>From the center E $\frac{1}{16}$ sec. cor. of sec. 11, identical with the NW cor. lot 7 and the NE cor. lot 17.</p> <p>North, along the N and S center line of the NE$\frac{1}{4}$ of section 11.</p> <p>Over rolling land, through scattering timber and undergrowth.</p>
6.70	Spur, slopes S. 80° E.
8.20	Draw, drains E.
10.00	<p>Pt. for the center S-NE $\frac{1}{64}$ sec. cor. of sec. 11.</p> <p>Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S11 C-S-NE $\frac{1}{64}$ 1974</p>


Subdivision of Section 11,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS							
	<p>from which</p> <p style="padding-left: 40px;">A juniper, 6 ins. diam., bears N. 79° W., 91.5 lks. dist., mkd. C-S-NE 1/64 S11 BT.</p>						
17.30	Deep gully, drains S. 15° E.						
20.00	Pt. for the NE 1/16 sec. cor. of sec. 11, at intersection with the E and W center line of the NE 1/4 of sec. 11; not monumented.						
26.30	Gully, drains westerly.						
39.975	The pt. for the E 1/16 sec. cor. of secs. 2 and 11.						
	<hr style="width: 20%; margin: 0 auto;"/>						
	<p>From the N 1/16 sec. cor. of secs. 11 and 12.</p> <p>S. 89°14' W., along the E and W center line of the NE 1/4 of sec. 11.</p> <p>Over rolling land, through medium undergrowth.</p>						
2.80	Enter gypsum mining area, bears N and S.						
18.00	W edge of gypsum mining area, bears N and S; enter scattering timber and medium undergrowth.						
19.745	The pt. for the NE 1/16 sec. cor. of sec. 11.						
21.70	Gully, drains S. 25° E.						
39.50	The pt. for the center N 1/16 sec. cor. of sec. 11.						
	<hr style="width: 20%; margin: 0 auto;"/>						
	<p>SE 1/4, Section 11</p> <hr style="width: 20%; margin: 0 auto;"/>						
	<p>From the center E 1/16 sec. cor. of sec. 11, identical with the NW cor. lot 7 and NE cor. lot 17.</p> <p>S. 0°27' W., along the N and S center line of the SE 1/4 of sec. 11, parallel to the N and S center line of the sec.</p> <p>Over gently rolling land, through gypsum mining area.</p>						
3.60	S edge of gypsum mining area, bears S. 85° E. and N. 85° W., thence through medium undergrowth.						
12.825	Pt. for the SE cor. of Lot 17, at intersection with the center line of Forest Highway No. 9, asphalt surfaced, bears N. 74°39' E. and S. 74°39' W.						
	<p>Drive a railroad spike, flush with the surface of the road, with top mkd.</p> <div style="text-align: center; margin-top: 20px;"> <table style="border-collapse: collapse; margin: 0 auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">Lot 17</td> <td style="padding: 0 5px;"> </td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S</td> <td style="padding: 0 5px;"> </td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">11</td> <td style="padding: 0 5px;"> </td> </tr> </table> <p style="margin-top: 5px;">1974</p> </div>	Lot 17		S		11	
Lot 17							
S							
11							
	<p>from which</p> <p style="padding-left: 40px;">An iron post, 28 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, for a reference monument, bears S. 20°00' E., 143.9 lks. dist., with brass cap mkd. S11 RM 95 Ft. 1974 and an arrow pointing to the cor.</p>						

Subdivision of Section 11,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>An iron post, 28 ins. long, 2½ ins. diam., set 26 ins. in the ground, for a reference monument, bears N. 20°00' W., 143.9 lks. dist., with brass cap mkd. S11 RM 95 Ft. 1974 and an arrow pointing to the cor.</p> <p>From this pt., the SW cor. of Lot 17, identical with the SE cor. of Lot 18, bears S. 74°39' W., 20.68 chs. dist., along the center line of Forest Highway No. 9; heretofore described.</p>
	<p>SW¼, Section 11</p> <hr/>
	<p>From the W 1/16 sec. cor. of secs. 11 and 14.</p> <p>N. 2°37' E., along the N and S center line of the SW¼ of sec. 11.</p> <p>Over gently rolling land, through scattering timber and medium undergrowth.</p>
14.80	Power line, bears N. 75° E. and S. 75° W.
15.80	Fence, bears N. 76° E. and S. 76° W.
16.40	Forest Highway No. 9, asphalt surfaced, bears N. 74°39' E. and S. 74°39' W.
20.59	<p>Pt. for the SW 1/16 sec. cor. of sec. 11, at intersection with the E and W center line of the SW¼ of sec. 11, identical with a cor. of Lots 4, 5, 6 and 18.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.</p>
	<p>T13N R5E SW 1/16 S11 1974</p>
	<p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, W of the cor.</p> <p>From this pt., a local open end pipe, 2 ins. diam., projecting 15 ins. above ground, bears S. 33° E., 25.5 lks. dist.</p>
22.00	Enter rolling land, bears N. 30° E. and S. 30° W.
40.15	The pt. for the center W 1/16 sec. cor. of sec. 11, identical with a cor. of Lots 4 and 18.
	<hr/>
	<p>From the pt. for the center S 1/16 sec. cor. of sec. 11.</p> <p>S. 88°05' W., along the E and W center line of the SW¼ of sec. 11.</p> <p>Over gently rolling land, through scattering timber and medium undergrowth.</p>
4.78	Pt. for the S cor. of Lot 18, at intersection with the center line of Forest Highway No. 9, asphalt surfaced, bears N. 74°39' E. and S. 74°39' W.

Subdivision of Section 11,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Drive a railroad spike, flush with the surface of the road, with top mkd.</p> <div style="text-align: center;"> <p>Lot 18 S 11</p>  <p>1974</p> </div> <p>from which</p> <p>An iron post, 28 ins. long, 2½ ins. diam., set 22 ins. in the ground, for a reference monument, bears S. 40°00' E., 104.5 lks. dist., with brass cap mkd. S11 RM 69 Ft. 1974 and an arrow pointing to the cor.</p> <p>An iron post, 28 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 40°00' W., 104.5 lks. dist., with brass cap mkd. S11 RM 69 Ft. 1974 and an arrow pointing to the cor.</p> <p>From this point, the SE cor. of Lot 18, identical with the SW cor. of Lot 17, bears N. 74°39' E., 4.965 chs. dist., along the center line of Forest Highway No. 9; heretofore described.</p>
21.75	Fence, bears S. 10° E. and N. 10° W.
22.235	The SW 1/16 sec. cor. of sec. 11, identical with a cor. of Lots 4, 5, 6 and 18.
32.40	Ridge, bears N and S.
42.96	The pt. for the S 1/16 sec. cor. of secs. 10 and 11.

Subdivision of Section 12,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

	<p>From the ¼ sec. cor. of secs. 12 and 13.</p> <p>N. 1°04' W., along the N and S center line of sec. 12.</p> <p>Over rolling land, through scattering timber and medium undergrowth.</p>
.035	Fence, bears E and W.
11.60	Fence, bears W and East, 5 lks. dist., to a fence cor.; fences extend N and W, thence along W side of fence.
20.98	<p>Pt. for the center S 1/16 sec. cor. of sec. 12, at proportionate dist., based on the official 1962 supplemental plat of sec. 12.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T13N R5E</p> <p>C</p> <p>S 1/16 S12</p> <p>C</p> <p>1974</p> </div>

Subdivision of Section 12,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>from which</p> <p>A fence cor., bears East, 7 lks. dist.; fences extend S and W.</p> <p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, W of the cor.</p>
25.10	Wash, 20 lks. wide, 8 ft. deep, drains S. 55° W.
30.20	Fence, bears N. 85° E. and S. 85° W.
32.90	Graded gravel road, bears N. 30° E. and S. 30° W.
36.30	Gully, 20 lks. wide, 15 ft. deep, drains W.
40.92	<p>Pt. for the center ¼ sec. cor. of sec. 12, at intersection with the E and W center line of sec. 12.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T13N R5E C¼ S12 1974</p> <p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, W of the cor.</p>
47.90	Fence, bears N. 35° E. and S. 35° W.
56.80	Wash, 15 lks. wide, 5 ft. deep, drains W.
60.92	Pt. for the center N 1/16 sec. cor. of sec. 12, referring to the NW¼ of sec. 12 only; not monumented.
62.045	<p>Pt. for the closing cor. of sec. 12, on line 3-4 of the abandoned Fort Verde Garden Reservation; not monumented.</p> <p>From this pt., the closing cor. of secs. 1 and 12 for inside the abandoned Fort Verde Garden Reservation, bears N. 54°53' E., 32.09 chs. dist., heretofore described.</p>
62.30	Wash, 100 lks. wide, 4 ft. deep, drains S. 70° W.
71.10	Track road, bears N. 65° E. and S. 65° W.
80.92	The ¼ sec. cor. of secs. 1 and 12.
	<p>From the ¼ sec. cor. of sec. 12 only, on the E. bdy. of the Tp.</p> <p>S. 89°28' W., along the E and W center line of sec. 12.</p> <p>Over rolling land, through scattering timber and medium undergrowth.</p>
15.10	Fence, bears NE and SW.
33.50	Graded gravel road, bears N. 35° E. and S. 35° W.

Subdivision of Section 12,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
38.03	The center $\frac{1}{4}$ sec. cor. of sec. 12.
42.80	Fence, bears N. 35° E. and S. 35° W.
57.84	Pt. for the center W 1/16 sec. cor. of sec. 12 identical with the NE cor. of Lot 18; not monumented.
63.10	Wash, 50 lks. wide, 3 ft. deep, drains S. 15° W.
64.50	Low spur, slopes S. 20° W.
65.20	Gully, 20 lks. wide, 4 ft. deep, drains S. 20° W.
67.745	Pt. for the center W-W 1/64 sec. cor. of sec. 12 identical with lot cors. of Lots 18 and 19.
	Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">W-W 1/64</p> <p style="text-align: center;">C _____ C</p> <p style="text-align: center;">S12</p> <p style="text-align: center;">1974</p>
68.955	Pt. for the closing cor. of sec. 12, identical with lot cors. of Lots 7, 16 and 19 on line 3-4 of the abandoned Fort Verde Garden Reservation, is in the center of a track road, bears N. 50° E. and S. 50° W.
	Set an iron post, 28 ins. long, 2½ ins. diam., 39 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T13N R5E</p> <p style="text-align: center;">C / CC / C</p> <p style="text-align: center;">S12</p> <p style="text-align: center;">1974</p>
	from which
	<p style="text-align: center;">An iron post, 28 ins. long, 2½ ins. diam., set 22 ins. in the ground for a reference monument, bears S. 44°47' E., 22.7 lks. dist., mkd. T13N R5E CC S12 RM 15 FT. 1974 and an arrow pointing to the cor.</p>
	<p style="text-align: center;">An iron post, 28 ins. long, 2½ ins. diam., set 24 ins. in the ground for a reference monument, bears N. 44°47' W., 22.7 lks. dist., mkd. T13N R5E CC S12 RM 15 FT. 1974 and an arrow pointing to the cor.</p>
	Cor. is located in a gate in a fence, bearing S. 80° E. and N. 80° W.
	From this pt., the closing cor. of secs. 1 and 12 for inside the abandoned Fort Verde Garden Reservation, bears N. 54°53' E., 69.385 chs. dist., heretofore described.
77.65	The $\frac{1}{4}$ sec. cor. of secs. 11 and 12, heretofore described.

Subdivision of Section 12,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
	SW $\frac{1}{4}$, Section 12
	From the pt. for the W 1/16 sec. cor. of secs. 12 and 13. N. 0°51' W., along the N and S center line of the SW $\frac{1}{4}$ of sec. 12. Over nearly level land, through open pasture land.
9.00	Fence, bears E and West, 46 lks. dist., to a fence cor.; fences extend N, E and W.
9.10	Irrigation ditch, flows N. 60° W.
9.50	Wooden fence, bears S. 60° E. and N. 60° W.
10.00	Forest Highway No. 9, asphalt surfaced, bears S. 60° E. and N. 60° W.
20.49	Pt. for the SW 1/16 sec. cor. of sec. 12, at intersection of the E and W center line of the SW $\frac{1}{4}$ of sec. 12. Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd. T13N R5E SW 1/16 S12 1974
	Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W of the cor.
29.81	Pt. for the SE cor. of Lot 18, sec. 12 at proportionate dist., based on the official 1962 supplemental plat of sec. 12. Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd. Lot 18 S12 1974
	Raise a mound of stone, 2 ft. base, 1 ft. high, W of the cor.
30.30	Fence, bears S. 75° E. and N. 75° W.
40.46	The pt. for the center W 1/16 sec. cor. of sec. 12 identical with the NE cor. of Lot 18. From the center S 1/16 sec. cor. of sec. 12. S. 89°22'30" W., along the E and W center line of the SW $\frac{1}{4}$ of sec. 12. Over gently rolling land, through medium undergrowth.
7.70	Fence, bears N. 30° E. and S. 30° W.
8.00	Graded gravel road, bears N. 30° E. and S. 30° W.

Subdivision of Section 12,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
19.89	The SW 1/16 sec. cor. of sec. 12.
35.50	Forest Highway No. 9, asphalt surfaced, bears S. 58° E. and N. 58° W.
40.02	The pt. for the S 1/16 sec. cor. of secs. 11 and 12.
	<hr/> From the SE cor. of Lot 18.
	S. 89°26'30" W., along the S. bdy. of Lots 18 and 19.
	Over gently rolling land, through medium undergrowth.
3.90	Wash, 50 lks. wide, 14 ft. deep, drains S. 15° W.
9.99	Pt. for the SW cor. of Lot 18 and SE cor. of Lot 19.
	Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.
	$\begin{array}{c} \text{S} 12 \\ \hline \text{Lot 19} \text{Lot 18} \\ \hline 1974 \end{array}$
	Raise a mound of stone, 2 ft. base, 1 ft. high, W of the cor.
16.00	Wash, 50 lks. wide, 4 ft. deep, drains SW.
19.98	The pt. for the SW cor. of Lot 19, sec. 12.
	<hr/> From the cor. for the SW cor. Lot 18 and SE cor. Lot 19, sec. 12.
	N. 0°25'30" W., between Lots 18 and 19, sec. 12.
	Over gently rolling land, through medium undergrowth.
4.50	Wash, 90 lks. wide, 14 ft. deep, drains S. 70° W.
9.65	Fence, bears SE and NW.
10.655	The center W-W 1/64 sec. cor. of sec. 12, identical with lot cors. of Lots 18 and 19.
	<hr/> NW¼, Section 12
	<hr/> From the pt. for the center W 1/16 sec. cor. of sec. 12.
	N. 0°42' W., along the N and S center line of the NW¼ of sec. 12.
	Over gently rolling land through medium undergrowth.
7.65	Pt. for the closing cor. of sec. 12, on line 3-4 of the abandoned Fort Verde Garden Reservation; not monumented.

Subdivision of Section 12,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
	From this pt., the closing cor. for secs. 1 and 12 for inside the abandoned Fort Verde Garden Reservation, bears N. 54°53' E., 55.92 chs. dist., heretofore described.
8.10	N edge of wash area, bears N. 65° E. and S. 65° W., curving southerly.
9.60	Track road, bears N. 50° E. and S. 50° W.
19.955	Pt. for the NW 1/16 sec. cor. of sec. 12, at intersection with the E and W center line of the NW¼ of sec. 12; not monumented.
39.93	The W 1/16 sec. cor. of secs. 1 and 12.


	From the pt. for the center N 1/16 sec. cor. of sec. 12, for the NW¼ only.
	S. 89°20' W., along the E and W center line of the NW¼ of sec. 12.
1.65	Pt. for the closing cor. of sec. 12, on line 3-4 of the abandoned Fort Verde Garden Reservation; not monumented.
	From this pt., the closing cor. for secs. 1 and 12 for inside the abandoned Fort Verde Garden Reservation, bears N. 54°53' E., 34.08 chs. dist., heretofore described.
19.68	Pt. for the NW 1/16 sec. cor. of sec. 12.
27.20	Draw, drains S. 35° E.
29.53	Pt. for the center W-NW 1/64 sec. cor. of sec. 12.
	Set an iron post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.
	S12 C-W-NW 1/64 1974
36.20	Spur, slopes S. 10° W.
37.10	Draw, drains S. 10° W.
39.38	The N 1/16 sec. cor. of secs. 11 and 12.

	From the center W-W 1/64 sec. cor. of sec. 12, identical with lot cors. of lots 18 and 19.
	N. 0°32' W., along the N and S center line of the SW¼ of the NW¼ of sec. 12.
	Over gently rolling land, through medium undergrowth.
.835	Pt. for the closing cor. of sec. 12, on line 3-4 of the abandoned Fort Verde Garden Reservation, identical with the SE cor. of lot 16 and the SW cor. of lot 17.

Subdivision of Section 12,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS

Set an iron post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.



From this pt., the closing cor. of secs. 1 and 12 for inside the abandoned Fort Verde Garden Reservation, bears N. 54°53' E., 67.925 chs. dist., heretofore described.

Raise a mound of stone, 2½ ft. base, 1½ ft. high, N of the cor.

19.94 The center W-NW 1/64 sec. cor. of sec. 12.

Subdivision of Section 13,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

From the ¼ sec. cor. of secs. 13 and 24.

N. 1°30'30" E., along the N and S center line of sec. 13.

Over gently rolling land, through medium undergrowth.

2.70 Fence, bears S. 60° E. and N. 60° W.


3.20 Graded dirt road, bears S. 60° E. and N. 60° W.

3.50 Fence, bears S. 60° E. and N. 60° W.

20.67 The center S 1/16 sec. cor. of sec. 13, monumented with a local open end pipe, 14 ins. long, ¾ in. diam., projecting 4 ins. above ground. This position is harmoniously related to existing survey cors. in the immediate area, and is accepted as the cor. position.

At the cor. pt.

Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.



Raise a mound of stone, 3 ft. base, 2 ft. high, W of the cor.

Reset the local pipe alongside the iron post.

N. 1°35' E., beginning new measurement.

.015 Fence, bears E and W.

2.10 Graded gravel road, bears E and W.

6.00 Graded gravel road, in a curve, bears S. 15° E. and N. 80° W.

9.30 Fence, bears E and W.

Subdivision of Section 13,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
13.80	Graded gravel road, bears S. 75° E. and N. 75° W.
14.20	Fence, bears S. 75° E. and N. 75° W.
14.30	Irrigation ditch, 6 lks. wide, 2 ft. deep, flows N. 75° W.
15.30	Wash, 15 lks. wide, 7 ft. deep, drains S. 60° W.
18.10	Track road, bears S. 80° E. and N. 80° W.
20.00	Fence, bears E and W.
20.66	The center $\frac{1}{4}$ sec. cor. of sec. 13, monumented with a local re-bar, $\frac{3}{4}$ in. diam., projecting 3 ins. above ground. This position is harmoniously related to existing survey cors. in the immediate area, and is accepted as the cor. position; not remonumented.
	N. 1°30' E., beginning new measurement.
3.00	Fence, bears E and W.
5.20	Center of a concrete bridge, bears E, 100 lks. dist.; bridge bears N and S.
6.20	Clear Creek, 70 lks. wide, 4 ft. deep, course N. 65° W.
9.90	Asphalt road, bears N. 50° E. and S. 80° W.
10.10	Fence, bears E and W.
15.60	Forest Highway No. 9, asphalt surfaced, bears S. 20° E. and N. 20° W.
16.60	Graded gravel road, bears SE and NW.
18.30	Power line, bears S. 55° E. and N. 55° W.
21.50	Spur, slopes W.
26.00	Wash, 15 lks. wide, 2 ft. deep, drains S. 85° W.
29.90	Spur, slopes W.
36.20	Ridge, bears N. 25° E. and S. 25° W.
40.405	The $\frac{1}{4}$ sec. cor. of secs. 12 and 13.
	From the $\frac{1}{4}$ sec. cor. of sec. 13 only, on the E. bdy. of the Tp.
	S. 88°42' W., along the E and W center line of sec. 13.
	Over rolling land, through scattering timber and medium undergrowth.
2.20	Draw, drains S. 30° E.
3.70	Spur, slopes S. 25° E.
5.90	Draw, drains SE.
8.30	Fence, bears N. 5° E. and S. 5° W.
9.60	Spur, slopes S. 20° E.

Subdivision of Section 13,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
13.00	Power line, bears S. 55° E. and N. 55° W.
13.30	Spur, slopes S.
15.50	Bluff, 70 ft. high, bears S. 55° E. and N. 55° W.
19.255	The center E 1/16 sec. cor. of sec. 13, monumented with a local open end pipe, 18 ins. long, 1 in. diam., projecting 3 ins. above ground. This position is harmoniously related to existing survey cors. in the immediate area, and is accepted as the cor. position.
	At the cor. pt.
	Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.
	T13N R5E E 1/16
	C ————— C
	S13 1973
	from which
	An X B0, chiseled in the concrete foundation of a cattle guard, bears N. 62°00' E., 11 lks. dist.
	Raise a mound of stone, 3 ft. base, 2 ft. high, N of the cor.
	Reset the local pipe alongside the iron post.
	————— S. 88°41'30" W., beginning new measurement.
.06	Fence, bears SE and NW.
.40	Graded gravel road, bears SE and NW.
5.40	Clear Creek, 50 lks. wide, 3 ft. deep, course N. 60° W.
17.40	Fence, bears N and S.
18.10	Forest Highway No. 9, gravel surfaced, bears N and S.
19.23	The center ¼ sec. cor. of sec. 13.
	————— S. 88°37' W., beginning new measurement.
1.50	Fence, bears N and S.
1.95	Graded gravel road, bears N and S.
6.20	Graded gravel road, bears N and S.
8.60	Wash, 15 lks. wide, 2 ft. deep, drains N. 10° W.
11.60	Graded gravel road, bears N. 15° E. and S. 15° W.

Subdivision of Section 13,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
18.30	Center of Cochran Tank, 3.00 x 1.50 chs. in size, longer sides bear E and W.
20.755	<p>The center W 1/16 sec. cor. of sec. 13, monumented with a local open end pipe, 2 ins. diam., projecting 8 ins. above a concrete base, 18 ins. diam. This position is harmoniously related to existing survey cors. in the immediate area, and is accepted as the cor. position.</p> <p>At the cor. pt.</p> <p>Set a brass tablet, 3¼ ins. diam., 2½ ins. stem, in the top of the open end pipe, with top mkd.</p> <p style="text-align: center;">T13N R5E W 1/16 C ————— C S13 1973</p> <p>Raise a mound of stone, 4 ft. base, 1½ ft. high, N of the cor.</p> <p>Cor. is at a fence cor.; fences extend S and W.</p> <p style="text-align: center;">—————</p> <p>S. 88°44' W., beginning new measurement.</p> <p>Along an E and W fence.</p>
20.73	The ¼ sec. cor. of secs. 13 and 14.
	SE¼, Section 13 —————
20.195	<p>From the E 1/16 sec. cor. of secs. 13 and 24.</p> <p>N. 0°42' E., along the N and S center line of the SE¼ of sec. 13.</p> <p>Over nearly level land, through scattering timber and medium undergrowth.</p> <p>The SE 1/16 sec. cor. of sec. 13, monumented with a local open end pipe, 1 in. diam., projecting 12 ins. above a concrete base, 18 ins. diam. This position is harmoniously related to existing survey cors. in the immediate area, and is accepted as the cor. position.</p> <p>At the cor. pt.</p> <p>Removed the top 12 ins. of the local pipe and set a brass tablet, 3¼ ins. diam., 2½ ins. stem, in the top of the remaining pipe, with top mkd.</p> <p style="text-align: center;">T13N R5E SE 1/16 S13 1973</p> <p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, W of the cor.</p> <p>Cor. is at a fence cor.; fences extend northerly and westerly.</p> <p style="text-align: center;">—————</p>

Subdivision of Section 13,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
	N. 0°42' E., beginning new measurement.
	Along a N and S fence.
3.50	Cochran Tank tributary, 60 lks. wide, 3 ft. deep, course N. 80° W.
18.00	Clear Creek, 50 lks. wide, 3 ft. deep, course northwesterly.
19.70	Graded gravel road, bears SE and NW.
20.13	The center E 1/16 sec. cor. of sec. 13.
	<hr/> From the S 1/16 sec. cor. of sec. 13 only, on the E. bdy. of the Tp.
	S. 87°14' W., along the E and W center line of the SE¼ of sec. 13.
	Over gently rolling land, through scattering timber and medium undergrowth.
6.00	Clear Creek, 40 lks. wide, 2 ft. deep, course N. 60° W.
19.55	The SE 1/16 sec. cor. of sec. 13.
	<hr/> S. 87°09' W., beginning new measurement.
	Along an E and W fence.
14.00	Forest Highway No. 9, gravel surfaced, bears S. 20° E. and N. 20° W.
19.55	The center S 1/16 sec. cor. of sec. 13.
	<hr/> SW¼, Section 13 <hr/>
	From the pt. for the W 1/16 sec. cor. of secs. 13 and 24.
	N. 0°51' E., along the N and S center line of the SW¼ of sec. 13.
	Over gently rolling land, through medium undergrowth.
11.80	Fence, bears S. 60° E. and N. 60° W.
12.20	Graded dirt road, bears S. 60° E. and N. 60° W.
12.60	Fence, bears S. 60° E. and N. 60° W.
20.325	The SW 1/16 sec. cor. of sec. 13, monumented with a local re-bar, 16 ins. long, 3/4 in. diam., projecting 4 ins. above ground. This position is harmoniously related to existing survey cors. in the immediate area, and is accepted as the cor. position.
	At the cor. pt.
	Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

Subdivision of Section 13,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>T13N R5E SW 1/16 S13 1973</p>
	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, W of the cor.</p> <p>Reset the local re-bar alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°51' E., beginning new measurement.</p>
.025	Fence, bears E and W, 51 lks. dist. to a fence cor.; fences extend N and easterly.
18.60	Ditch, 8 lks. wide, 2 ft. deep, flows N. 70° W.
20.305	The center W 1/16 sec. cor. of sec. 13.
	<hr style="width: 20%; margin: 10px auto;"/> <p>From the center S 1/16 sec. cor. of sec. 13.</p> <p>S. 89°34' W., along the E and W center line of the SW$\frac{1}{4}$ of sec. 13.</p> <p>Over gently rolling land, through medium undergrowth.</p> <p>Along an E and W fence.</p>
20.49	The SW 1/16 sec. cor. of sec. 13.
	<hr style="width: 20%; margin: 10px auto;"/> <p>S. 89°38' W., beginning new measurement.</p>
.51	Fence, bears N and S, 2.5 lks. dist. to a fence cor.; fences extend N and easterly.
16.60	Fence, bears S. 60° E. and N. 60° W.
17.70	Graded dirt road, bears S. 60° E. and N. 60° W.
18.50	Fence, bears S. 60° E. and N. 60° W.
20.475	The S 1/16 sec. cor. of secs. 13 and 14.
	<p>Subdivision of Section 14, T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona</p>
	<p>From the $\frac{1}{4}$ sec. cor. of secs. 14 and 23.</p> <p>N. 0°45' E., along the N and S center line of sec. 14.</p> <p>Over gently rolling land, through medium undergrowth.</p>
19.865	<p>The center S 1/16 sec. cor. of sec. 14, monumented with a local open end pipe, 39 ins. long, 2 ins. diam., projecting 24 ins. above ground. This position is harmoniously related to existing survey cors. in the immediate area, and is accepted as the cor. position.</p> <p>At the cor. pt.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.</p>

Subdivision of Section 14,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>T13N R5E C S 1/16 S14 C 1974</p>
	<p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, W of the cor.</p> <p>Reset the local pipe alongside the iron post.</p> <p>Cor. is at a fence cor.; fences extend northerly and westerly.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°47' E., beginning new measurement.</p> <p>Along a N and S fence.</p>
19.10	Fence projects N. 65° W.; continue along N and S fence.
19.50	Graded gravel road, bears S. 65° E. and N. 65° W.
19.89	The center ¼ sec. cor. of sec. 14, monumented with a local open end pipe, 42 ins. long, 2 ins. diam., projecting 21 ins. above ground. This position is harmoniously related to existing survey cors. in the immediate area, and is accepted as the cor. position.
	<p>At the cor. pt.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p>
	<p>T13N R5E C¼ S14 1974</p>
	<p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, W of the cor.</p> <p>Reset the local pipe alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°39' E., beginning new measurement.</p>
1.80	Asphalt road, bears E and SW.
5.50	Asphalt road, bears N. 65° E. and S. 65° W.
9.70	Asphalt road, bears N. 65° E. and S. 65° W.
13.70	Graded gravel road, bears N. 65° E. and S. 65° W.
15.50	Enter wash area, bears N. 65° E. and S. 65° W.
18.30	Clear Creek, 35 lks. wide, 3 ft. deep, course S. 65° W.
18.70	Along the W edge of a graded gravel road.
22.50	S end of a power line, thence along power line.
24.60	N edge of wash area, bears E and W.

Subdivision of Section 14,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
25.20	Graded gravel road changes to asphalt surface.
41.495	The pt. for the $\frac{1}{4}$ sec. cor. of secs. 11 and 14.
From the $\frac{1}{4}$ sec. cor. of secs. 13 and 14.	
N. $89^{\circ}35'$ W., along the E and W center line of sec. 14.	
Over gently rolling land, through medium to dense undergrowth.	
Along an E and W fence.	
39.95	Fence cor.; fences extend S. $89^{\circ}35'$ E. and S. 65° E.
39.99	The center $\frac{1}{4}$ sec. cor. of sec. 14.
N. $89^{\circ}35'$ W. beginning new measurement.	
.90	Graded gravel road, bears S. 65° E. and N. 65° W.
1.60	Asphalt road, bears S. 15° E. and N. 15° W.
10.20	Graded gravel road, bears N and S.
14.40	Graded gravel road, bears N and S.
18.40	Graded gravel road, bears N and S.
20.35	The center W $\frac{1}{16}$ sec. cor. of sec. 14, monumented with a local open end pipe, 36 ins. long, 2 ins. diam., projecting 20 ins. above ground. This position is harmoniously related to existing survey cors. in the immediate area, and is accepted as the cor. position.
At the cor. pt.	
Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.	
<p style="text-align: center;">T13N R5E W $\frac{1}{16}$</p> <p style="text-align: center;">C ——— C S14 1974</p>	
Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N of the cor.	
Reset the local pipe alongside the iron post.	
Cor. is at a fence cor.; fences extend southerly and N. $89^{\circ}31'$ W.	
N. $89^{\circ}31'$ W., beginning new measurement.	
Along an E and W fence.	
10.60	Asphalt road bears N. 25° E. and a graded gravel road bears S. 25° W.
20.33	The $\frac{1}{4}$ sec. cor. of secs. 14 and 15.

Subdivision of Section 14,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>SW$\frac{1}{4}$, Section 14</p> <hr/>
	<p>From the pt. for the W 1/16 sec. cor. of secs. 14 and 23. N. 0°32' E., along the N and S center line of the SW$\frac{1}{4}$ of sec. 14. Over gently rolling land, through medium undergrowth.</p>
19.905	<p>Pt. for the SW 1/16 sec. cor. of sec. 14, at intersection with the E and W center line of the SW$\frac{1}{4}$ of sec. 14. Set an iron post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T13N R5E SW 1/16 S14 1974</p> <p>From this pt., a local open end pipe, 2 ins. diam., projecting 18 ins. above ground, bears S. 31°00' E., 10 lks. dist. This local pipe is located at a fence cor.; fences extend N and E.</p>
39.81	<p>The center W 1/16 sec. cor. of sec. 14.</p> <hr/> <p>From the center S 1/16 sec. cor. of sec. 14. N. 89°38' W., along the E and W center line of the SW$\frac{1}{4}$ of sec. 14. Over gently rolling land, through medium undergrowth. Along an E and W fence.</p>
20.215	<p>Fence, bears N and S, 8 lks. dist. to a fence cor.; fences extend N and E.</p>
20.265	<p>The SW 1/16 sec. cor. of sec. 14.</p>
40.53	<p>The pt. for the S 1/16 sec. cor. of secs. 14 and 15.</p>
	<p>Subdivision of Section 15, T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona</p> <hr/>
	<p>From the $\frac{1}{4}$ sec. cor. of secs. 15 and 22. N. 0°04' E., along the N and S center line of sec. 15. Over gently rolling land, through scattering undergrowth.</p>
7.90	<p>Abandoned fence, bears N. 17° E. and S. 17° W.</p>
18.00	<p>Dirt road, bears N. 60° E. and S. 60° W.</p>
27.50	<p>Draw, drains N. 40° W.</p>
33.60	<p>Draw, drains northerly, from S. 60° E., thence along draw.</p>
38.30	<p>Fence, bears E and W.</p>

Subdivision of Section 15,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
38.40	Leave draw, drains N. 40° W.
40.07	The center ¼ sec. cor. of sec. 15, at intersection with the E and W center line of sec. 15, monumented with a local open end pipe, 40 ins. long, 2 ins. diam., projecting 24 ins. above ground. This position is accepted as the cor. position.
	At the cor. pt.
	Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone, 2 ft. base to top, with brass cap mkd.
	T13N R5E C¼ S15 1974
	from which
	A mesquite, 5 ins. diam., bears S. 25° W., 36 lks. dist., mkd. C¼ S15 BT.
	Reset the local pipe alongside the iron post.
	_____ N. 0°04' E., beginning new measurement.
.80	Clear Creek, 90 lks. wide, 15 ft. banks, course S. 60° W.
5.40	Fence, bears N. 55° E. and S. 55° W.
19.20	N edge of creek bottom, bears N. 55° E. and S. 55° W.
19.30	Irrigation ditch, 15 lks. wide, 5 ft. deep, flows S. 55° W., thence through dense brush, bears N. 55° E. and S. 55° W.
19.70	Fence, bears N. 55° E. and S. 55° W.
20.17	Fence, bears S. 20° E. and N. 20° W.
20.20	The center N 1/16 sec. cor. of sec. 15, monumented with a local open end pipe, 42 ins. long, 2 ins. diam., projecting 26 ins. above the ground. This position is harmoniously related to existing survey cors. in the immediate area, and is accepted as the cor. position.
	At the cor. pt.
	Set an iron post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, and in a mound of stone, 2½ ft. base to top, with brass cap mkd.
	T13N R5E C N 1/16 S15 C 1974
	Reset the local pipe alongside the iron post.
	_____ N. 0°04' E., beginning new measurement.

Subdivision of Section 15,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
.30	Power line, bears S. 88° E. and N. 88° W.
.95	Fence cor.; fences extend S and W.
7.70	Wickiup Creek, 60 lks. wide, 3 to 10 ft. deep, drains S. 25° E.
13.61	Pt. for the closing cor. of sec. 15, on line 4-1 of the abandoned Fort Verde Garden Reservation.
	Set an iron post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T13N R5E 1974</p>
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, S of the cor.
	From this pt., the closing cor. of secs. 10 and 15, on line 4-1 of the abandoned Fort Verde Garden Reservation, bears N. 35°04' W., 8.29 chs. dist., heretofore described.
20.17	The ¼ sec. cor. of secs. 10 and 15, heretofore described.
	From the ¼ sec. cor. of secs. 14 and 15.
	N. 89°24'30" W., along the E and W center line of sec. 15.
	Over gently rolling land, through medium to dense undergrowth.
	Along an E and W fence.
20.23	Pt. for the center E 1/16 sec. cor. of sec. 15; not monumented.
31.90	Fence, bears S and N, 43 lks. dist. to a fence cor.; fences extend E, S and W, 20 lks. dist. to a fence cor.; fences extend N, S and W, with an abandoned fence extending E.
39.90	Fence, bears S and N, 42 lks. dist., to a fence cor.; fences extend N, E and S, 10 lks. dist., to a fence cor.; fences extend N, E and S, thence through scattering timber.
40.46	The center ¼ sec. cor. of sec. 15.
42.70	Clear Creek, 330 lks. wide, 6 to 15 ft. deep, course S. 55° W.
46.30	Fence, bears S and N, 50 lks. dist. to a fence cor.; fences extend N and E, 80 lks. dist. to a fence cor.; fences extend northeasterly and W.

Subdivision of Section 15,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
79.00	Fence, bears N. 65° E. and S. 65° W.
79.40	Dirt road, bears N. 65° E. and SW.
80.45	Fence, bears N. 65° E. and S. 65° W.
80.68	The ¼ sec. cor. of secs. 15 and 16.
<p>NE¼, Section 15</p> <hr/>	
<p>From the pt. for the center E 1/16 sec. cor. of sec. 15. N. 0°10' W., along the N and S center line of the NE¼ of sec. 15.</p>	
<p>Over nearly level land, through medium undergrowth.</p>	
.10	Abandoned fence, bears E and W.
.31	Fence, bears E and W.
.60	Graded gravel road, bears E and W.
4.00	Rock wall, 3 ft. high, bears N. 85° E. and S. 85° W.; descend to creek bottom.
5.00	Enter medium timber, bears N. 75° E. and S. 75° W.; end of descent.
5.20	Old unused irrigation ditch, bears N. 75° E. and S. 75° W.
5.24	Pt., for the closing cor. of sec. 15, on line 4-1 of the abandoned Fort Verde Garden Reservation; not monumented.
<p>From this pt., the pt. for cor. No. 4 of the abandoned Fort Verde Garden Reservation, bears S. 35°04' E., 02 lks. dist., heretofore described.</p>	
20.125	Pt. for the NE 1/16 sec. cor. of sec. 15, at intersec- tion with the E and W center line of the NE¼ of sec. 15.
<p>Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p>	
<p>T13N R5E NE 1/16 S15 1974</p>	
<p>from which</p>	
<p>A sycamore, 13 ins. diam., bears N. 69°15' W., 173 lks. dist., mkd. NE 1/16 S15 BT.</p>	
<p>An ash, 7 ins. diam., bears N. 12°15' W., 125 lks. dist., mkd. NE 1/16 S15 BT.</p>	
<p>Raise a mound of stone, 3½ ft. base, 3 ft. high, W of the cor.</p>	
23.70	Clear Creek, 70 lks. wide, 3 to 5 deep, course S. 70° W.

Subdivision of Section 15,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
24.40	Irrigation ditch, 12 lks. wide, flows S. 70° W.
28.40	Telephone line, bears N. 65° E. and S. 65° W.
40.25	The E 1/16 sec. cor. of secs. 10 and 15.

	From the pt. for the N 1/16 sec. cor. of secs. 14 and 15.
	N. 89°12'30" W., along the E and W center line of the NE $\frac{1}{4}$ of sec. 15.
	Over nearly level open land.
	Through residential area.
4.20	Graded dirt road, bears N and S.
20.15	The NE 1/16 sec. cor. of sec. 15.
	Thence through medium timber and undergrowth, bears NE and SW.
25.00	Clear Creek, 60 lks. wide, 2 to 5 ft. deep, course SW.
30.665	Pt. for the closing cor. of sec. 15, on line 4-1 of the abandoned Fort Verde Garden Reservation; not monumented.
	From this pt., the closing cor. of secs. 10 and 15, on line 4-1 of the abandoned Fort Verde Garden Reservation, bears N. 34°04' W., 25.07 chs. dist., heretofore described.
35.40	Wickiup Creek, 40 lks. wide, 2 ft. deep, drains S. 10° E.
40.31	The center N 1/16 sec. cor. of sec. 15.
Subdivision of Section 17, T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona	
From the $\frac{1}{4}$ sec. cor. of secs. 17 and 20, monumented with a volcanic stone, firmly set, 24 x 16 x 16 ins. above ground, mkd. $\frac{1}{4}$ on the N face, with a mound of stone, 3 ft. base, 2 ft. high, N of the cor.	
At the cor. pt.	
Set a brass tablet, $3\frac{1}{4}$ ins. diam., $2\frac{1}{2}$ ins. stem, in a drill hole in the volcanic stone, with top mkd.	
T13N R5E $\frac{1}{4}$ $\frac{S17}{S20}$	
1974	
from which	
A volcanic boulder, 30 x 28 x 25 ins. above ground, bears N. 14°45' E., 25 lks. dist., mkd. X B0 on the SE face.	
A granite boulder, 24 x 15 x 12 ins. above ground, bears S. 15°30' W., 35 lks. dist., mkd. X B0 on top.	

Subdivision of Section 17,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
	N. 2°35' E., along the N and S center line of sec. 17.
	Over gently rolling land, through scattering timber and dense undergrowth.
8.70	Fence, bears N. 85° E. and S. 85° W.
12.90	Wash, 50 lks. wide, 2 ft. deep, drains N. 60° E.
22.90	Power line, bears S. 30° E. and N. 30° W.
24.00	Fence, bears N. 80° E. and S. 80° W.
25.80	Gravel road, bears N and S. 35° E., thence along same road.
32.70	Power line, bears S. 75° E. and N. 75° W.
37.00	Power line, bears S. 75° E. and N. 75° W.
37.60	Power line, bears N. 20° E. and S. 20° W.
40.71	Pt. for the center $\frac{1}{4}$ sec. cor. of sec. 17 at intersection with the E and W center line of sec. 17, is near the center of a graded gravel road, bearing N. 2°35' E. and S. 2°35' W.
	Set an iron post, 28 ins. long, 2½ ins. diam., 32 ins. in the ground, with brass cap mkd.
	T13N R5E
	C $\frac{1}{4}$ S17
	1974
	from which
	A power pole, bears N. 42°30' E., 77 lks. dist., with aluminum tag mkd. PS176149.
	An iron post, 28 ins. long, 2½ ins. diam., set 22 ins. in the ground for a reference monument, bears East, 42.4 lks. dist., with brass cap mkd. T13N R5E C $\frac{1}{4}$ S17 RM 28 Ft. 1974 and an arrow pointing to the cor.
	An iron post, 28 ins. long, 2½ ins. diam., set 16 ins. in the ground and in a mound of stone, 2 ft. base to top, for a reference monument, bears West, 42.4 lks. dist., with brass cap mkd. T13N R5E C $\frac{1}{4}$ S17 RM 28 Ft. 1974 and an arrow pointing to the cor.
76.60	Graded gravel road, bears S. 85° E. and N. 85° W., thence along abandoned road.
76.90	Power line, bears N. 85° E. and S. 85° W.
77.20	Fence, bears S. 50° E. and N. 50° W.
83.10	Fence, bears W and E, 29 lks. dist., to a N and S fence.
83.42	Fence, bears W and E, 29 lks. dist., to a N and S fence.
83.54	The $\frac{1}{4}$ sec. cor. of secs. 8 and 17.

Subdivision of Section 17,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
	From the true pt. for the $\frac{1}{4}$ sec. cor. of secs. 16 and 17.
	From this pt., the witness $\frac{1}{4}$ sec. cor. of secs. 16 and 17, monumented with a local iron post, $2\frac{1}{2}$ ins. diam., projecting 24 ins. above ground, bears N. $0^{\circ}41'$ E., 2.78 chs. dist., (record) with brass cap mkd.
	<p>RANCHO ROCA ROJA</p> <p>$\frac{1}{4}$</p> <p>W.C.</p> <p>S17 S16</p> <p>SUR 1940</p>
	from which
	<p>A cottonwood, 40 ins. diam., bears N. 63° W., 66 lks. dist., mkd. with a healed blaze. (Record, 64 lks. dist.)</p>
	A limestone, 17 x 11 x 11 ins., projecting 4 ins. above ground, mkd. $\frac{1}{4}$ on the S face, is alongside the iron post; not remonumented.
	N. $88^{\circ}53'$ W., along the E and W center line of sec. 17.
	Over river bottom land, subject to overflow, through medium timber and undergrowth.
1.40	Fence, bears N. 15° E. and S. 15° W., thence over open field.
22.00	Irrigation ditch, 10 lks. wide, 2 ft. deep, flows S. 20° E.
22.20	Fence, bears S. 20° E. and N. 20° W.
25.00	Fence, bears S. 70° E. and N. 70° W.
27.30	Fence, bears S. 10° E. and N. 10° W.
32.70	Fence, bears S. 10° E. and N. 10° W.
37.60	Fence, bears N and S.
40.60	Woods Ditch, 10 lks. wide, 3 ft. deep, flows S. 25° E.
40.70	Enter medium to dense undergrowth, bears N and S.
41.90	Fence and power line, bear N and S.
42.42	The center $\frac{1}{4}$ sec. cor. of sec. 17, in the center of a graded gravel road, bears N and S.
42.60	Fence, bears N and S.
55.70	Enter rolling land, bears NE and SW, thence through scattering timber and medium undergrowth.
60.605	Pt. for the center W $\frac{1}{16}$ sec. cor. of sec. 17.
	Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Subdivision of Section 17,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
	T13N R5E W 1/16 C ————— C S17 1974
	Raise a mound of stone, 2½ ft. base, 2 ft. high, N of the cor. From this pt., a local re-bar, 5/8 in. diam., projecting 6 ins. above ground, bears N. 5° W., 74 lks. dist., located at a fence cor.; fences extend N and S. 88° E.
68.40	Track road, bears S. 50° E. and N. 50° W.
78.10	Track road, bears N. 15° E. and S. 15° W.
78.79	The ¼ sec. cor. of sec. 17 only on the W bdy. of the sec.
Subdivision of Section 20, T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona	
	From the ¼ sec. cor. of secs. 20 and 29. N. 1°44' W., along the N and S center line of sec. 20. Over rolling land, through medium timber and scattering undergrowth.
.78	Fence, bears E and W.
10.70	Wash, 10 lks. wide, 2 ft. deep, drains E.
19.10	Spur, slopes N. 50° W.
29.20	Power line, bears S. 30° E. and N. 30° W.
31.00	Wash, drains Easterly.
33.20	Abandoned fence, bears S. 85° E. and N. 85° W.
34.80	Draw, drains SE.
38.02	Pt. for the center ¼ sec. cor. of sec. 20 at intersection with the E and W center line of sec. 20. Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.
	T13N R5E C¼ S20 1974
	from which A juniper, 6 ins. diam., bears S. 36°30' W., 31 lks. dist., mkd. C¼ S20 BT.
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W of cor.
44.30	Spur, slopes S. 75° E.

Subdivision of Section 20,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
58.48	<p>Pt. for the center N 1/16 sec. cor. of sec. 20.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T13N R5E C N 1/16 S20 C 1974</p> <p>from which</p> <p style="padding-left: 40px;">A granite outcrop, 3 x 2 x 1 ft. above ground, bears N. 78°30' E., 45 lks. dist., mkd. X B0.</p> <p style="padding-left: 40px;">A cedar, 4 ins. diam., bears S. 59° W., 12.5 lks. dist., mkd. X at breast height and BT at the base.</p> <p>Raise a mound of stone, 4 ft. base, 2 ft. high, W of cor.</p>
60.40	Fence, bears E and W.
64.20	Track road, bears N. 30° E. and S. 10° W.
76.30	Wash, 20 lks. wide, 2 ft. deep, drains N. 75° E.
78.94	The ¼ sec. cor. of secs. 17 and 20.
	<p>From the ¼ sec. cor. of secs. 20 and 21.</p> <p>N. 88°35' W., along the E and W center line of sec. 20.</p> <p>Over rolling land, through scattering timber and medium undergrowth.</p> <p>30.40 Hat Ranch Tank, 180 lks. diam., bears South, 330 lks. dist.</p> <p>31.00 Draw, drains S. 35° E.</p> <p>42.96 The center ¼ sec. cor. of sec. 20.</p> <p>48.80 Power line, bears S. 30° E. and N. 30° W.</p> <p>57.50 Spur, slopes N. 50° E.</p> <p>64.50 Track road, bears N. 15° E. and S. 15° W.</p> <p>72.20 Wash, 60 lks. wide, 3 ft. deep, drains N.</p> <p>77.60 Fence, bears N and S; spur, slopes N.</p> <p>78.75 The ¼ sec. cor. of sec. 20 only, monumented with an iron post, 1 in. diam., projecting 16 ins. above ground, with brass cap mkd.</p> <p style="text-align: center;">¼ S20 1916</p>

Subdivision of Section 20,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A mound of stone, 2 ft. base, 1½ ft. high, is E of the cor.</p> <p>Cor. is located in an abandoned N and S fence.</p>
	<p>Subdivision of Section 21, T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona</p>
	<p>From the ¼ sec. cor. of secs. 21 and 28.</p> <p>N. 5°27' E., along the N and S center line of sec. 21.</p> <p>Over nearly level open land.</p>
.30	Fence, bears E and W.
1.00	Woods Ditch, 20 lks. wide, 3 ft. deep, flows southeasterly.
1.70	Fence, bears S. 20° E. and N. 20° W.
4.20	Fence, bears E and W.
8.70	Fence, bears E and W.
9.70	Fence, bears S. 10° E. and N. 10° W.
20.20	Fence and power line, bear E and W.
28.20	Fence, bears S. 10° E. and N. 10° W.
37.00	Concrete irrigation ditch, flows S. 75° E., thence over gently rolling land, through medium timber and undergrowth, bears S. 75° E. and N. 75° W.
37.10	Fence, bears S. 75° E. and N. 75° W.
37.30	Graded gravel road, bears S. 75° E. and N. 75° W.
37.50	Fence, bears S. 75° E. and N. 75° W.
38.505	<p>Pt. for the center ¼ sec. cor. of sec. 21 at intersection of the E and W center line of sec. 21.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T13N R5E C¼ S21 1974</p> <p>from which</p> <p style="padding-left: 40px;">A cottonwood, 9 ins. diam., bears N. 44° W., 40 lks. dist., mkd. C¼ S21 BT.</p>
	<p>Raise a mound of stone, 2 ft. base, 1½ ft. high, W of cor.</p>
38.80	Fence, bears N. 80° E. and S. 80° W.
39.10	Fence, bears S. 70° E. and N. 70° W.

Subdivision of Section 21,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.60	Present right bank of the Verde River, 4 ft. high, bears S. 65° E. and N. 65° W.
43.50	Present left bank of the Verde River, 2 to 5 ft. high, bears S. 65° E. and N. 65° W., thence over washed area subject to overflow.
50.70	Leave washed area, bears N. 70° E. and S. 70° W.
58.43	Fence, bears E and W, 10 lks. dist., to a fence cor.; fences extend northerly along the N and S center line, and westerly, thence along fence.
58.67	Pt. for the center N 1/16 sec. cor. of sec. 21. Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.
	<p>T13N R5E C N 1/16 S21 C 1974</p>
	<p>from which</p> <p style="padding-left: 40px;">A fence cor., bears S. 24°15' W., 26 lks. dist.; fences extend N, E and S. 15° W.</p> <p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, W of cor.</p>
78.835	The ¼ sec. cor. of secs. 16 and 21.
	<p>From the pt. for the ¼ sec. cor. of secs. 21 and 22. S. 88°47' W., along the E and W center line of sec. 21. Over level open pasture.</p>
.50	Fence, bears S. 55° E. and N. 55° W.
.60	Concrete irrigation ditch, bears S. 55° E. and N. 55° W.
21.40	Fence and power line, bear S. 10° E. and N. 10° W.
22.70	Fence, bears S. 60° E. and N. 60° W., thence along creek bottom land, through medium timber and undergrowth.
33.70	Clear Creek, 80 lks. wide, 2 ft. deep, course S. 15° E.
35.80	Present left bank of the Verde River, 2 to 4 ft. high, bears S. 50° E. and N. 50° W.
36.40	Present right bank of the Verde River, 2 to 4 ft. high, bears S. 60° E. and N. 60° W.
38.40	Fence, bears S. 60° E. and N. 60° W.
39.81	The center ¼ sec. cor. of sec. 21.

Subdivision of Section 21,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
42.90	Gate in a fence, bears North 15 lks. dist., to a fence projecting W, and S, 29 lks. dist., to a fence bearing E and W, thence along graded gravel road, bears south-easterly and W.
59.595	<p>Pt. for the center W 1/16 sec. cor. of sec. 21, is in the middle of a graded gravel road, bearing E and W.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 38 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T13N R5E W 1/16</p> <p style="text-align: center;">C ——— S21 ——— C 1974</p> <p>from which</p> <p style="padding-left: 40px;">An iron post, 28 ins. long, 2½ ins. diam., set 22 ins. in the ground, for a reference monument, bears N. 45° E., 19.7 lks. dist., with brass cap mkd. T13 N R5E C-W 1/16 S21 RM 13 Ft. 1974 and an arrow pointing to the cor.</p> <p style="padding-left: 40px;">An iron post, 28 ins. long, 2½ ins. diam., set 23 ins. in the ground, for a reference monument, bears S. 45° W., 19.7 lks. dist., with brass cap mkd. T13N R5E C-W 1/16 S21 RM 13 Ft. 1974 and an arrow pointing to the cor.</p>
60.40	Gate in a fence, bears N, 15 lks. dist., to a fence projecting E, and S, 12 lks. dist., to a fence cor.; fences extend E and southerly.
60.80	Graded gravel road, in a curve, bears E and S. 50° W.
63.60	Wash, 30 lks. wide, 10 ft. deep, drains N. 50° E., thence over gently rolling land, through dense timber and medium undergrowth.
67.90	Woods Ditch, 30 lks. wide, 4 ft. deep, flows S. 60° E.
68.90	Graded gravel road, bears S. 40° E. and N. 40° W.
69.90	Power line, bears S. 30° E. and N. 30° W.
77.50	Graded gravel road, bears N. 10° E. and S. 10° W.
77.90	Fence, bears N. 10° E. and S. 10° W.
78.20	Wash, 20 lks. wide, 1 ft. deep, drains S. 20° W.
79.38	The ¼ sec. cor. of secs. 20 and 21.
<p>Subdivision of Section 22, T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona</p>	
<p>From the ¼ sec. cor. of secs. 22 and 27.</p> <p>N. 0°22' W., along the N and S center line of sec. 22.</p> <p>Over gently rolling land, through scattering timber and undergrowth.</p>	

Subdivision of Section 22,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
.70	Draw, drains S. 60° W.
2.90	Abandoned fence, bears S. 80° E. and N. 80° W.
4.70	Draw, drains S. 60° W.
13.50	Draw, drains S. 55° E.
40.13	Pt. for the center $\frac{1}{4}$ sec. cor. of sec. 22, at intersection with the E and W center line of sec. 22. Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd. T13N R5E C $\frac{1}{4}$ S22 1974
	Raise a mound of stone, 4 ft. base, 2 ft. high, W of cor.
68.80	Dirt road, in a curve, bears S. 80° E. and S. 60° W.
80.18	The $\frac{1}{4}$ sec. cor. of secs. 15 and 22.
	From the $\frac{1}{4}$ sec. cor. of secs. 22 and 23. N. 89°30' W., along the E and W center line of sec. 22. Over rolling land, through scattering timber and undergrowth.
12.10	Graded gravel road, bears N. 20° E. and S. 20° W.
39.40	The center $\frac{1}{4}$ sec. cor. of sec. 22.
55.10	Fence, bears N. 15° E. and S. 15° W.
55.80	Descend steep W slope.
60.63	Pt. for the center W $\frac{1}{16}$ sec. cor. of sec. 22. Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd. T13N R5E W $\frac{1}{16}$ C ——— S22 ——— C 1974
	Raise a mound of stone, 4 ft. base, $2\frac{1}{2}$ ft. high, N of cor.
66.00	Fence, bears N. 15° E. and S. 15° W., thence over level pasture land.
78.40	Fence, bears N. 60° E. and S. 60° W.
81.86	The pt. for the $\frac{1}{4}$ sec. cor. of secs. 21 and 22.

Subdivision of Section 27,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	Subdivision of Section 27, T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona
	<p>From the $\frac{1}{4}$ sec. cor. of secs. 27 and 34, monumented with an iron post, 1 in. diam., projecting 12 ins. above ground, with brass cap mkd. as described in the official record of the 1923 resurvey of part of the subdivisional lines of T. 13 N., R. 5 E.</p> <p>from which</p> <p style="padding-left: 40px;">A dead cottonwood, 30 ins. diam., bears N. 66° W., 443 lks. dist., mkd. with a healed blaze.</p> <p>Cor. is located 3 lks. W of a N and S fence.</p> <p>N. 4°43' E., along the N and S center line of sec. 27.</p> <p>Over gently rolling land, through scattering timber and undergrowth.</p> <p>Along a N and S fence.</p>
10.90	Fence, bears S. 75° E. and N. 75° W.
18.90	Fence, bears S. 75° E. and N. 75° W.
27.00	Concrete irrigation ditch, flows S. 50° E.
28.90	Graded dirt road, bears S. 70° E. and N. 70° W.
29.10	Power line, bears S. 70° E. and N. 70° W.
40.18	<p>The center $\frac{1}{4}$ sec. cor. of sec. 27, monumented with a local re-bar, $\frac{1}{2}$ in. diam., 14 ins. long, projecting 1 in. above ground. This position is harmoniously related to existing survey cors. in the immediate area, and is accepted as the cor. position.</p> <p>At the cor. pt.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T13N R5E C¼ S27 1974</p> <p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, W of the cor.</p> <p>Reset the re-bar alongside the iron post.</p> <p>From this pt., a local open end pipe, 1¼ in. diam., projecting 12 ins. above ground, bears S. 2°46' E., 106 lks. dist.</p>
5.50	<p>N. 4°26' E., beginning new measurement.</p> <p>Track road, bears N. 85° E. and S. 85° W.</p>

Subdivision of Section 27,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
20.10	Pt. for the center N 1/16 sec. cor. of sec. 27.
	Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> <p>T13N R5E</p> <p>C</p> <p>N 1/16 S27</p> <p>C</p> <p>1974</p> </div>
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W of the cor.
23.00	Graded dirt road, bears N. 50° E. and S. 50° W.
33.30	Track road, bears S. 50° E. and N. 50° W.
40.20	The ¼ sec. cor. of secs. 22 and 27.
	From the ¼ sec. cor. of secs. 26 and 27.
	S. 89°44' W., along the E and W center line of sec. 27.
	Over rolling land, through scattering timber and undergrowth.
36.00	Graded dirt road, bears S. 30° E. and N. 30° W.
40.15	The center ¼ sec. cor. of sec. 27.
	<div style="text-align: center;"> <p>_____</p> <p>S. 89°45'30" W., beginning new measurement.</p> </div>
21.31	Pt. for the center W 1/16 sec. cor. of sec. 27.
	Set an iron post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> <p>T13N R5E</p> <p>W 1/16</p> <p>C-----C</p> <p>S27</p> <p>1974</p> </div>
	Raise a mound of stone, 3 ft. base, 2 ft. high, N of the cor.
23.40	Present left bank of the Verde River, 2 ft. high, bears N. 20° E. and S. 20° W.
26.60	Present right bank of the Verde River, 2 ft. high, bears N. 20° E. and S. 20° W.
42.62	The ¼ sec. cor. of secs. 27 and 28.
	<div style="text-align: center;"> <p>NW¼, Section 27</p> <p>_____</p> </div>
	From the center W 1/16 sec. cor. of sec. 27.

Subdivision of Section 27,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
	N. 2°58' E., along the N and S center line of the NW ¹ / ₄ of sec. 27.
	Over river bottom land subject to overflow, through medium timber and undergrowth.
20.00	Present left bank of the Verde River, 2 to 4 ft. high, bears N. 10° E. and S. 10° W.
20.24	Pt. for the NW 1/16 sec. cor. of sec. 27, at intersection with the E and W center line of the NW ¹ / ₄ of sec. 27, falls in the bed of the Verde River; impractical to monument.
40.50	True pt. for the W 1/16 sec. cor. of secs. 22 and 27.
	—————
	From the center N 1/16 sec. cor. of sec. 27.
	N. 89°45' W., along the E and W center line of the NW ¹ / ₄ of sec. 27.
	Descending gradually over open land.
2.70	Track road, bears N. 40° E. and S. 40° W.
14.00	Descend steep W slope, through scattering timber and undergrowth.
16.70	Fence, bears N and S.
16.83	Pt. selected for the witness NW 1/16 sec. cor. of sec. 27.
	Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.
	W C T13N R5E ← NW 1/16 S27 1974
	from which
	A cottonwood, 10 ins. diam., bears S. 62°30' W., 138 lks. dist., mkd. with an X at breast height and BT at the base.
	A cottonwood, 9 ins. diam., bears N. 82° W., 102 lks. dist., mkd. with an X at breast height and BT at the base.
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W of the cor.
17.00	Base of descent, thence over river bottom land subject to overflow, through medium timber.
21.40	Present left bank of the Verde River, 2 to 4 ft. high, bears N. 10° E. and S. 10° W.
21.83	The true pt. for the NW 1/16 sec. cor. of sec. 27.
24.00	Present right bank of the Verde River, 3 to 6 ft. high, bears N. 10° E. and S. 10° W.
24.60	Fence cor.; fences extend N and S. 35° W.

Subdivision of Section 27,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
43.65	The N 1/16 sec. cor. of secs. 27 and 28.
Subdivision of Section 28, T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona	
From the 1/4 sec. cor. of secs. 28 and 33.	
N. 1°36'30" E., along the N and S center line of sec. 28.	
Over gently rolling land, through medium timber and undergrowth.	
1.00	Wash, 20 lks. wide, 2 ft. deep, drains NE.
8.70	Graded road, bears N. 50° E. and S. 50° W.
17.70	Fence, bears N. 35° E. and S. 35° W.
20.17	The center S 1/16 sec. cor. of sec. 28, monumented with a local re-bar, 5/8 in. diam., 12 ins. long, projecting 2 ins. above ground. This position is harmoniously related to existing survey cors. in the immediate area and is accepted as the cor. position.
At the cor. pt.	
Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.	
<pre> T13N R5E C S 1/16 S28 C 1974 </pre>	
from which	
A power pole, cut off 10 ft. above ground, bears North, 2 lks. dist.	
A power pole, bears N. 81° W., 29 lks. dist., with aluminum tag mkd. PS 101233.	
Raise a mound of stone, 2 ft. base, 2 ft. high, W of the cor.	
Reset the re-bar alongside the iron post.	
<hr style="width: 20%; margin: 0 auto;"/>	
N. 1°36'30" E., beginning new measurement.	
.05	Power and telephone lines, bears S. 70° E. and N. 70° W., 28 lks. dist., to intersection of lines extending N and E.
20.10	Power line, bears E and W.
20.17	Pt. for the center 1/4 sec. cor. of sec. 28, at intersection of the E and W center line of sec. 28; not monumented.
This pt. is located at a bend in a graded gravel road, bearing N and E.	

Subdivision of Section 28,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Thence along a graded gravel road.
57.40	Bend in same road, bears S and NW.
60.91	The ¼ sec. cor. of secs. 21 and 28.
	From the ¼ sec. cor. of secs. 27 and 28.
	N. 88°49' W., along the E and W center line of sec. 28.
	Over gently rolling land, through medium timber and undergrowth.
	Along an E and W fence.
7.20	Fences extend S. 25° E. and N. 25° W.
25.10	Fence, bears S. 10° E. and N. 10° W.
25.20	Irrigation ditch, 10 lks. wide, 4 ft. deep, flows S. 25° W.
26.50	E end of a graded gravel road, projecting W, thence along graded gravel road.
41.40	Fence cor.; fences extend N and E.
41.61	The pt. for the center ¼ sec. cor. of sec. 28.
41.90	Power line, bears N and S.
44.80	Wash, 20 lks. wide, 2 ft. deep, drains N. 35° E.
58.20	Wash, 10 lks. wide, 1 ft. deep, drains N. 55° E.
62.33	The center W 1/16 sec. cor. of sec. 28, monumented with local re-bar, 5/8 in. diam., 13 ins. long, projecting 3 ins. above ground. This position is harmoniously related to existing survey cors. in the immediate area, and is accepted as the cor. position.
	At the cor. pt.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T13N R5E W 1/16 C _____ C S28 1974
	Set a steel fence post, 2 lks. N of the cor.
	reset the re-bar alongside the iron post.

	N. 88°50'30" W., beginning new measurement.
1.10	Fence, bears N and S.
11.40	Power line, bears S. 35° E. and N. 35° W.
14.70	Wash, 10 lks. wide, 3 ft. deep, drains N. 70° E.

Subdivision of Section 28,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
16.60	Graded gravel road, bears S. 35° E. and N. 35° W.
20.10	Graded gravel road, bears N. 50° E. and S. 50° W.
20.605	The ¼ sec. cor. of secs. 28 and 29.
<p>SW¼, Section 28</p> <hr/>	
<p>From the pt. for the W 1/16 sec. cor. of secs. 28 and 33. N. 0°34' E., along the N and S center line of the SW¼ of sec. 28.</p>	
<p>Over gently rolling land, through medium timber and dense undergrowth.</p>	
2.20	Wash, 30 lks. wide, 2 ft. deep, drains N. 40° E.
7.60	Wash, 30 lks. wide, 2 ft. deep, drains N. 60° E.
14.90	Graded gravel road, bears S. 32° E. and N. 32° W.
20.08	<p>Pt. for the SW 1/16 sec. cor. of sec. 28, at intersection with the E and W center line of the SW¼ of sec. 28.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p>
<p>T13N R5E SW 1/16 S28 1974</p>	
<p>from which</p>	
<p>A wood post, 7 ins. diam., projecting 5 ft. above ground, bears S. 76°17' W., 37.5 lks. dist.</p>	
<p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, W of the cor.</p>	
26.00	Fence, bears N. 5° E. and S. 5° W.
40.16	<p>The center W 1/16 sec. cor. of sec. 28.</p> <hr/> <p>From the center S 1/16 sec. cor. of sec. 28.</p>
<p>N. 88°33' W., along the E and W center line of the SW¼ of sec. 28.</p>	
<p>Over gently rolling land, through medium timber and undergrowth.</p>	
2.30	Wash, 10 lks. wide, 2 ft. deep, drains N. 60° E.
7.80	Wash, 10 lks. wide, 2 ft. deep, drains N. 25° E.
17.30	Power line, bears S. 35° E. and N. 35° W.
19.95	Fence, bears N. 20° E. and S. 20° W.
20.36	The SW 1/16 sec. cor. of sec. 28.

Subdivision of Section 28,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.65	The pt. for the S 1/16 sec. cor. of secs. 28 and 29.
	<p style="text-align: center;">Subdivision of Section 33, T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona</p>
	<p>From the standard ¼ sec. cor. of sec. 33, on the S. bdy. of the Tp., monumented with an iron post, 1 in. diam., projecting 20 ins. above ground, set in a mound of stone, 2½ ft. base, 1 ft. high, with brass cap mkd. as described in the official record of the 1923 resurvey of the 3rd Stan. Par. N., through part of R. 5 E.</p> <p>N. 2°32' W., along the N and S center line of sec. 33.</p> <p>Over rolling land, through medium timber and dense undergrowth.</p>
6.30	Draw, drains E.
10.00	Spur, slopes S. 55° E.
13.40	Draw, drains S. 80° E.
17.20	Dim jeep trail, bears N. 60° E. and S. 60° W.
17.40	Spur, slopes N. 75° E.
21.10	Dim jeep trail, bears N. 65° E. and S. 65° W.
38.13	<p>The center ¼ sec. cor. of sec. 33, at intersection with the E and W center line of sec. 33, monumented with a local re-bar, ½ in. diam., 2 ft. long, projecting 4 ins. above ground, set alongside a granite stone, 5 x 10 x 8 ins. above ground, mkd. X ¼ on top. This position is harmoniously related to existing survey cors. in the immediate area, and is accepted as the cor. position.</p> <p>At the cor. pt.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T13N R5E C¼ S33 1974</p> <p>from which</p> <p style="padding-left: 40px;">X B0 on a volcanic rock, 3 x 2 x 1.5 ft. above ground, bears S. 15° E., 72.5 lks. dist.</p> <p style="padding-left: 40px;">A juniper, 7 ins. diam., bears N. 62° W., 123 lks. dist., mkd. C¼ S33 BT.</p> <p>Raise a mound of stone, 3 ft. base, 3 ft. high, W of the cor.</p> <p>Reset the re-bar and deposit the mkd. stone, alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 2°32' W., beginning new measurement.</p>

Subdivision of Section 33,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
20.34	Pt. for the center N 1/16 sec. cor. of sec. 33; not monumented.
37.50	Power line, bears S. 35° E. and N. 35° W.
38.60	Wash, 5 lks. wide, 3 ft. deep, drains N. 50° E.
40.68	The ¼ sec. cor. of secs. 28 and 33.
<hr/> From the ¼ sec. cor. of secs. 33 and 34.	
N. 87°12' W., along the E and W center line of sec. 33.	
Over rolling land, through medium timber and undergrowth.	
17.40	Power line, bears S. 35° E. and N. 35° W.
20.98	Pt. for the center E 1/16 sec. cor. of sec. 33; not monumented.
41.96	The center ¼ sec. cor. of sec. 33.
<hr/> N. 87°12' W., beginning new measurement.	
1.90	Wash, 40 lks. wide, 2 ft. deep, drains N. 75° E.
3.30	Wash, 10 lks. wide, 3 ft. deep, drains N. 40° E.
5.70	Graded gravel road, bears N. 25° E. and S. 25° W.
40.42	The ¼ sec. cor. of secs. 32 and 33.
<hr/> NE¼, Section 33	
<hr/> From the pt. for the center E 1/16 sec. cor. of sec. 33.	
N. 3°50' W., along the N and S center line of the NE¼ of sec. 33.	
Over gently rolling land, through medium timber and dense undergrowth.	
7.20	Power line, bears S. 35° E. and N. 35° W.
20.57	Pt. for the NE 1/16 sec. cor. of sec. 33, at intersection with the E and W center line of the NE¼ of sec. 33.
Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground, with brass cap mkd.	
<p style="text-align: center;">T13N R5E NE 1/16 S33 1974</p>	
from which	
<p style="text-align: center;">A juniper, 5 ins. diam., bears S. 7°30' E., 32 lks. dist., mkd. NE 1/16 S33 BT.</p>	
Raise a mound of stone, 3 ft. base, 1½ ft. high, W of cor.	

Subdivision of Section 33,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	
41.14	<p>The E 1/16 sec. cor. of secs. 28 and 33.</p> <hr/> <p>From the N 1/16 sec. cor. of secs. 33 and 34.</p> <p>N. 87°43' W., along the E and W center line of the NE ¼ of sec. 33.</p> <p>Ascending over rolling land, through scattering timber and medium undergrowth.</p>
4.10	Spur, slopes N. 20° E.
20.505	The NE 1/16 sec. cor. of sec. 33.
29.30	Power line, bears S. 40° E. and N. 40° W.
40.99	The pt. for the center N 1/16 sec. cor. of sec. 33.
	<p>Subdivision of Section 34, T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona</p>
	<p>From the standard ¼ sec. cor. of sec. 34, on the S. bdy. of the Tp., monumented with an iron post, 1 in. diam., projecting 14 ins. above ground, with brass cap mkd. as described in the official record of the 1923 resurvey of the 3rd Stan. Par. N., through part of R. 5 E.</p> <p>A mound of stone, 3 ft. base, 1½ ft. high, is N of the cor.</p> <p>N. 1°51' W., along the N and S center line of sec. 34.</p> <p>Over rolling land, through scattering timber and undergrowth.</p>
22.00	Spur, slopes NE.
37.20	Jeep trail, bears N. 70° E. and S. 70° W.
37.49	Pt. for the center ¼ sec. cor. of sec. 34, at intersection with the E and W center line of sec. 34.
	Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.
	<p>T13N R5E C¼ S34 1974</p>
	Raise a mound of stone, 3 ft. base, 1½ ft. high, W of the cor.
	From this pt., a local re-bar, 5/8 in. diam., projecting 2 ins. above ground, bears S. 88°30' W., 15.5 lks. dist.
61.30	Dirt road, bears S. 80° E. and N. 80° W.
67.90	Present right bank of the Verde River, 4 to 6 ft. high, bears S. 85° E. and N. 85° W.
70.20	Present left bank of the Verde River, 3 to 6 ft. high, bears E and W.

Subdivision of Section 34,
T. 13 N., R. 5 E., Gila and Salt River Meridian, Arizona

CHAINS	75.30 Fence cor.; fences extend S. 50° E., N. 50° W. and N. 1°51' W., thence along fence.
78.30	The ¼ sec. cor. of secs. 27 and 34.
<p>From the ¼ sec. cor. of secs. 34 and 35, monumented with an iron post, 1 in. diam., projecting 12 ins. above the ground, with brass cap mkd. as described in the official record of the 1923 resurvey of part of the subdivisional lines of T. 13 N., R. 5 E.</p> <p>A mound of stone, 2½ ft. base, 1½ ft. high, is W of the cor.</p> <p>S. 87°45' W., along the E and W center line of sec. 34.</p> <p>Over rolling land, through medium timber and undergrowth.</p>	
40.30	Jeep trail, bears N. 70° E. and S. 70° W.
41.26	The center ¼ sec. cor. of sec. 34.
59.00	Wash, 30 lks. wide, 1 ft. deep, drains northerly.
80.95	The ¼ sec. cor. of secs. 33 and 34.
<p>Dependent Resurvey of the Meanders of the Left Bank of the Verde River Through Section 5, Township 13 North, Range 5 East, Gila and Salt River Meridian, Arizona</p>	
<p>(Restoring the survey executed by Daniel Drummond, Deputy Surveyor, in 1892)</p> <hr style="width: 20%; margin: 0 auto;"/>	
<p>From the reestablished pt. for the meander cor. of secs. 5 and 32, on the N. bdy. of the Tp. and the left bank of the Verde River.</p> <p>Thence downstream with the adjusted record meanders of the left bank of the Verde River, through sec. 5.</p> <p>S. 14°43' W., 26.49 chs. At 20.71 chs. dist. on this course, the true pt. for the special meander cor. of sec. 5, at intersection with the E and W center line of the NW¼ of sec. 5, heretofore described.</p> <p>S. 49°02' W., 25.07 chs. At 1.00 ch. dist. on this course, Forest Highway No. 9, asphalt surfaced, bears S. 40° E. and N. 40° W.</p> <p>At 21.62 chs. dist. on this course, the special meander cor. of sec. 5, at intersection with the E and W center line of sec. 5, heretofore described.</p>	

Dependent Resurvey of the Meanders of the Left Bank of
the Verde River Through Section 5, Township 13 North,
Range 5 East, Gila and Salt River Meridian, Arizona

CHAINS

At end of course, the pt. for the reestablished meander cor. of secs. 5 and 6, on the left bank of the Verde River, identical to the witness 1/4 sec. cor. of secs. 5 and 6, heretofore described.

Survey of the Meanders of the Present Left Bank of the Verde River in Section 5, Township 13 North, Range 5 East, Gila and Salt River Meridian, Arizona

From the pt. for the meander cor. of secs. 5 and 32, on the N. bdy. of the Tp. and the present left bank of the Verde River.

Thence downstream with an informative traverse of the present left bank of the Verde River, through sec. 5, along a well defined bank, 2 to 8 ft. high, through medium timber and undergrowth.

S. 25°52' W., 6.13 chs.

S. 40°01' W., 4.70 chs.

S. 19°21' W., 5.60 chs.

S. 14°15' W., 3.48 chs.

S. 1°10' E., 2.25 chs. The special meander cor. of sec. 5, on the present left bank of the Verde River, heretofore described.

Thence with the meanders of the present left bank of the Verde River.

S. 1°10' E., 0.10 chs.

S. 24°36' W., 3.80 chs.

S. 51°33' W., 3.27 chs. At .90 chs. dist. on this course, E end of a one lane bridge, Forest Highway No. 9, bears S. 40° E. and N. 40° W., thence along a well defined bank, 2 to 4 ft. high.

S. 35°56' W., 3.39 chs.

S. 49°10' W., 15.42 chs. The special meander cor. of secs. 5 and 6, on the present left bank of the Verde River, heretofore described.

Thence with an informative traverse of the present left bank of the Verde River.

S. 49°10' W., 1.16 chs. At end of course, the pt. for the meander cor. of secs. 5 and 6, on the present left bank of the Verde River, heretofore described.

General Description

CHAINS

GENERAL DESCRIPTION

The northwest corner of Section 5 of this survey is about 1/4 mile south of the town of Camp Verde. The terrain varies from nearly level in the central portion of the township and along the Verde River to mountainous in the northeast and southwest portions of the survey. Elevation ranges from 2,960 to 3,690 feet above sea level. The soil varies from sandy and rocky in the higher elevations to clay loam along the creek and river bottoms. The vegetation consists of mesquite, catclaw, palo verde, cacti and sparse native grasses, throughout most of the mountainous terrain of the township. Stands of cottonwood and willow trees are located along the banks of the Verde River and Clear Creek. Scattering juniper trees are found throughout most of the higher elevations.

Forest Highway No. 9, enters the township near the northwest corner of Section 5 and traverses southeasterly, departing at the east boundary of Section 24. Numerous secondary and trail roads provide additional access to areas throughout the township, including residential areas along the Clear Creek and Verde River bottom lands, and a gypsum mine located partially in the northeast 1/4 of Section 11 and partially in the northeast 1/4 of Section 12.

An average number of readings throughout the area resurveyed gives a mean magnetic declination of 13°45' E., with a range of 1° in local attraction.

Form 9180-8
(March 1969)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Paul L. Reeves	Supervisory Survey Technician
Rex D. Krusell	Survey Aid
John P. Bennett III	Survey Aid
David M. Conrad	Survey Aid
Bruce M. Caschetta	Survey Aid

CERTIFICATE OF SURVEY

(I) (~~W~~), Harry K. Smith, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 19th day of October, 1973, (I) (~~W~~) have dependently resurveyed a portion of the abandoned Fort Verde Garden Reservation, a portion of the Camp Verde Military Reservation, a portion of the east boundary, a portion of the north boundary, a portion of the subdivisional lines, the subdivisional survey of certain sections, the resurvey of the 1892 meanders of the left bank of the Verde River through Section 5, and the meanders of the present left bank of the Verde River through Section 5, T. 13 N., R. 5 E., of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by (me), (~~us~~) and under (my) (~~own~~) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

June 19, 1976
(Date)

Harry K. Smith
(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the dependent resurvey of a portion of the abandoned Fort Verde Garden Reservation, a portion of the abandoned Camp Verde Military Reservation, a portion of the north and east boundaries, a portion of the subdivisional lines, subdivisional survey of certain sections, the resurvey of the 1892 meanders of the left bank of the Verde River through Section 5, and the meanders of the present left bank of the Verde River through Section 5 in Township 13 North, Range 5 East, of the Gila and Salt River Meridian, Arizona, executed by Harry K. Smith, Cadastral Surveyor,

having been critically examined and found correct, are hereby approved.

NOV 13 1978
(Date)

Bernard W. Fisher
(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in _____, is a true copy of the original field notes.

(Date)

(Chief, Division of Cadastral Survey) GPO 849 - 626